

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart E § 15.407

**Equipment** : Universal Wireless HDTV Adapter Travel Router DB  
**Brand Name** : BELKIN  
**Model No.** : F7D4555v1, F7D4555xx  
**Filing Type** : New Application  
**Applicant** : Belkin International inc.  
**Manufacturer** : 12045 East Waterfront Drive, Playa Vista, CA 90094, USA  
**FCC ID** : K7SF7D4555V1  
**Received Date** : Aug. 18, 2011  
**Final Test Date** : Sep. 28, 2011

## Statement

**Test result included is only for the PIFA Antenna 802.11a/n (5150~5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



***SPORTON International Inc.***

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT ..... 2**

**2 GENERAL INFORMATION..... 3**

2.1 Product Details.....3

2.2 Accessories.....3

2.3 Table for Filed Antenna.....4

2.4 Table for Carrier Frequencies .....5

2.5 Test Manner .....5

2.6 Table for Test Modes .....6

2.7 Table for Testing Locations.....6

2.8 Table for Supporting Units .....7

2.9 Table for Parameters of Test Software Setting.....7

2.10 EUT Operation during Test .....8

2.11 Test Configuration.....9

**3 TEST RESULT ..... 11**

3.1 AC Power Line Conducted Emissions Measurement .....11

3.2 99% Occupied Bandwidth Measurement .....29

3.3 Maximum Conducted Output Power Measurement .....43

3.4 Power Spectral Density Measurement.....46

3.5 Peak Excursion Measurement .....60

3.6 Radiated Emissions Measurement .....74

3.7 Band Edge and Fundamental Emissions Measurement .....112

3.8 Frequency Stability Measurement .....118

3.9 Antenna Requirements .....120

**4 LIST OF MEASURING EQUIPMENTS ..... 121**

**5 TEST LOCATION..... 123**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 124**

**APPENDIX A. TEST PHOTOS ..... A1 ~ A15**

**APPENDIX B. PHOTOGRAPHS OF EUT ..... B1 ~ B30**

### History of This Test Report

Original Issue Date: Sep. 28, 2011

Report No.: FR181025AN

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

# **CERTIFICATE OF COMPLIANCE**

according to

47 CFR FCC Part 15 Subpart E § 15.407

Equipment : Universal Wireless HDTV Adapter Travel Router DB

Brand Name : BELKIN

Model No. : F7D4555v1, F7D4555xx

Applicant : Belkin International inc.

12045 East Waterfront Drive, Playa Vista, CA 90094, USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 18, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Vice Manager

## ***SPORTON International Inc.***

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

**1 SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart E</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	4.15 dB
3.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
3.3	15.407(a)	Maximum Conducted Output Power	Complies	2.35 dB
3.4	15.407(a)	Power Spectral Density	Complies	2.08 dB
3.5	15.407(a)	Peak Excursion	Complies	6.15 dB
3.6	15.407(b)	Radiated Emissions	Complies	3.01 dB
3.7	15.407(b)	Band Edge Emissions	Complies	1.15 dB
3.8	15.407(g)	Frequency Stability	Complies	-
3.9	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

**2 GENERAL INFORMATION**

**2.1 Product Details**

The EUT may match the different type of antennas used for random. Only the radio detail of IEEE 802.11b/g/n is shown in this report. Only the radio detail of IEEE 802.11a/n is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	Power from adapter
Data Modulation Data Rate (Mbps)	OFDM for IEEE 802.11a (BPSK / QPSK / 16QAM / 64QAM) (6/9/12/18/24/36/48/54) See the below table for IEEE 802.11n
Frequency Range	5150~5250MHz
Channel Band Width (99%)	802.11a : 17.10 MHz 802.11n : MCS 0 (20MHz) : 18.10 MHz ; MCS 0 (40MHz) : 36.20 MHz MCS 8 (20MHz) : 18.10 MHz ; MCS 8 (40MHz) : 36.20 MHz
Conducted Output Power	802.11a : 11.53 dBm 802.11n : MCS 0 (20MHz) : 11.72 dBm ; MCS 0 (40MHz) : 11.44 dBm MCS 8 (20MHz) : 14.65 dBm ; MCS 8 (40MHz) : 14.52 dBm

**2.2 Accessories**

Power	Brand	Model	Rating
AC Adapter	ShunShing	SDCII10B	INPUT : 100-240V~50/60Hz 0.3A OUTPUT : +5V 2.1A
Switching Adapter	DVE	DSC-5CU-05 050100	INPUT : 100-240V~50/60Hz 0.2A OUTPUT : +5V 1A
Switching Adapter	Sunny	SYS1421-0505-W2	INPUT : 100-240V~0.5A MAX 50-60Hz OUTPUT : +5V 1A

Other:

The following items should be included:

- The Universal Wireless HDTV Adapter
- USB 2.0 cable \*1
- RJ45 cable \* 1
- Quick Installation Guide

2.3 Table for Filed Antenna

Antenna & Bandwidth

Antenna Mode	Single Chain		Two Chain	
	20 MHz	40 MHz	20 MHz	40 MHz
802.11a	V	X	X	X
802.11n	V	V	V	V

Antenna			
No.	Type	Connector	Gain (dBi)
1	PIFA	U.FL	2.50
2	PCB	U.FL	2.84

5GHz Directional Gain					
Set	Modulaton	Transmitter Outputs Signals Correlated	Transmitter Outputs (N)	Elements Gain (dBi)	Directional Gain (dBi)
1	802.11a	N/A	1	N/A	N/A
2	802.11n	uncorrelated	2	3.6, 3.6	3.6
3	802.11a	N/A	1	N/A	N/A
4	802.11n	uncorrelated	2	4.27, 4.27	4.27

For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:

- Any transmit signals are correlated, Directional Gain =  $G_{ANT} + 10 \log(N)$  dBi
- All transmit signals are completely uncorrelated, Directional Gain =  $G_{ANT}$

For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:

- Any transmit signals are correlated, Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$  dBi
- All transmit signals are completely uncorrelated, Directional Gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N]$  dBi

IEEE 802.11n Modulation Scheme

MCS Index	Spatial Streams	Modulation Type	Coding Rate	Data rate(Mbps)	
				20 MHz channel 800nsGI	40 MHz channel 800nsGI
0	1	BPSK	1/2	6.5	13.5
1	1	QPSK	1/2	13	27
2	1	QPSK	3/4	19.5	40.5
3	1	16-QAM	1/2	26	54
4	1	16-QAM	3/4	39	81
5	1	64-QAM	2/3	52	108
6	1	64-QAM	3/4	58.5	121.5
7	1	64-QAM	5/6	65	135
8	2	BPSK	1/2	13	27
9	2	QPSK	1/2	26	54
10	2	QPSK	3/4	39	81
11	2	16-QAM	1/2	52	108
12	2	16-QAM	3/4	78	162
13	2	64-QAM	2/3	104	216
14	2	64-QAM	3/4	117	243
15	2	64-QAM	5/6	130	270

**2.4 Table for Carrier Frequencies**

Frequency Band	Channel No.	Frequency (20MHz)	Channel No.	Frequency (40MHz)
5150~5250 MHz Band 1	36	5180 MHz	38	5190 MHz
	40	5200 MHz	46	5230 MHz
	44	5220 MHz	-	-
	48	5240 MHz	-	-

**2.5 Test Manner**

- a. The following test modes were for conducted final test:
  - Mode 1. EUT with BI-TEK PIFA Ant.+ ShunShing Adapter (SDCII10B)
  - Mode 2. EUT with Mingtek PIFA Ant.+ ShunShing Adapter (SDCII10B)
  - Mode 3. EUT with BI-TEK PIFA Ant.+ DVE Adapter (DSC-5CU-05)
  - Mode 4. EUT with Mingtek PIFA Ant.+ DVE Adapter (DSC-5CU-05)
  - Mode 5. EUT with BI-TEK PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)
  - Mode 6. EUT with Mingtek PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)
  - Mode 7. EUT with BI-TEK PIFA Ant.(From system)
  - Mode 8. EUT with Mingtek PIFA Ant.G (From system)
  
- b. The following test modes were for radiated emissions (Below 1GHz) final test:
  - Mode 1. EUT with PIFA Ant.+ ShunShing Adapter (SDCII10B)
  - Mode 2. EUT with PIFA Ant.+ DVE Adapter (DSC-5CU-05)
  - Mode 3. EUT with PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)
  - Mode 4. EUT with PIFA Ant. (From system)
  
- c. The following test modes were for radiated emissions (Above 1GHz) final test:
  - Mode 1. EUT with PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)

\*\*Performed the worst configuration for higher gain was test in final test report.  
(Only for conducted and radiated emissions test)



**2.6 Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna port
AC Power Conducted Emission Radiated Emission Below 1GHz	Refer to section 2.5	Auto	-	-
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	11a Band 1/BPSK	6Mbps	36/40/48	A
	11n Band 1/BPSK MCS 0 (20MHz)	6.5 Mbps	36/40/48	
	11n Band 1/BPSK MCS 0 (40MHz)	13.5 Mbps	38/46	
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	A/B
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
Max. Conducted Output Power Measurement Power Spectral Density	11a Band 1/BPSK	6Mbps	36/40/48	A
	11n Band 1/BPSK MCS 0 (20MHz)	6.5 Mbps	36/40/48	
	11n Band 1/BPSK MCS 0 (40MHz)	13.5 Mbps	38/46	
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	A/B; A+B
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
Radiated Emission Above 1GHz Fundamental Emissions	11a Band 1/BPSK	6Mbps	36/40/48	A
	11n Band 1/BPSK MCS 0 (20MHz)	6.5 Mbps	36/40/48	
	11n Band 1/BPSK MCS 0 (40MHz)	13.5 Mbps	38/46	
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	A+B
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
Band Edge Emission	11a Band 1/BPSK	6Mbps	36/48	A
	11n Band 1/BPSK MCS 0 (20MHz)	6.5 Mbps	36/48	
	11n Band 1/BPSK MCS 0 (40MHz)	13.5 Mbps	38/46	
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/48	A+B
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	

**2.7 Table for Testing Locations**

Test Site No.	Site Category	Location
CO01-NH	Conduction	Dung Hu
TH01-HY	OVEN Room	Hwa Ya
03CH03-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

**2.8 Table for Supporting Units**

Support Unit	Brand	Model	FCC ID	Remark
Personal Computer	DELL	DCTA	DoC	Conducted Emissions
LCD Monitor	DELL	E198WFPF	DoC	
USB Keyboard	DELL	Sk-8175	DoC	
USB Mouse	DELL	MOC5UO	DoC	
Printer	HP	C2642A	DoC	
Modem	ACEEX	DM1414	DoC	
USB2.0 iPod	APPLE	A1137	DoC	
Notebook (Remote Workstation)	HP	541	N/A	Radiated Emissions
Notebook	DELL	E5500	DoC	
Modem	ACEEX	DM1414	DoC	
Mouse	Microsoft	1004	DoC	

Note: For the radiated emissions (Above 1GHz) only tested by using notebook.

**2.9 Table for Parameters of Test Software Setting**

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**For Single Chain:**

**Power Parameters of IEEE 802.11a**

Test Software Version	MP Test		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	47	47	48

**Power Parameters of IEEE 802.11n**

Test Software Version	MP Test		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n(20MHz)	48	48	48
Frequency	5190 MHz	5230 MHz	-
IEEE 802.11n(40MHz)	48	48	-

**For Two Chain:**

**Power Parameters of IEEE 802.11n Ant. A+B**

Test Software Version	MP Test		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n(20MHz)	48&49	48&49	49&50
Frequency	5190 MHz	5230 MHz	-
IEEE 802.11n(40MHz)	49&50	49&50	-

## 2.10 EUT Operation during Test

For Conducted Emissions :

An executive program, "EMITEST.EXE" under Win XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

- a. The program was executed as follows:
- b. Turn on the power of all equipment.
- c. The EUT reads the test program from the hard disk drive and runs it.
- d. The EUT sends "H" messages to the monitor, and the monitor displays "H" patterns on the screen.
- e. The EUT sends " H " messages to the printer, then the printer prints them on the paper.
- f. The EUT sends messages to the modem.
- g. Repeat the steps from c to e.

At the same time, the following programs were executed:

- Executed "Ping.exe" to link with the remote workstation to receive and transmit data via RJ45 cable.


For Radiated Emissions :

- Executed "MP Test" to keep transmitting signals at fixed frequency.


2.11 Test Configuration

2.11.1 Radiation Emissions Test Configuration


For radiated emissions 9kHz~1GHz  
Mode 1~Mode 3

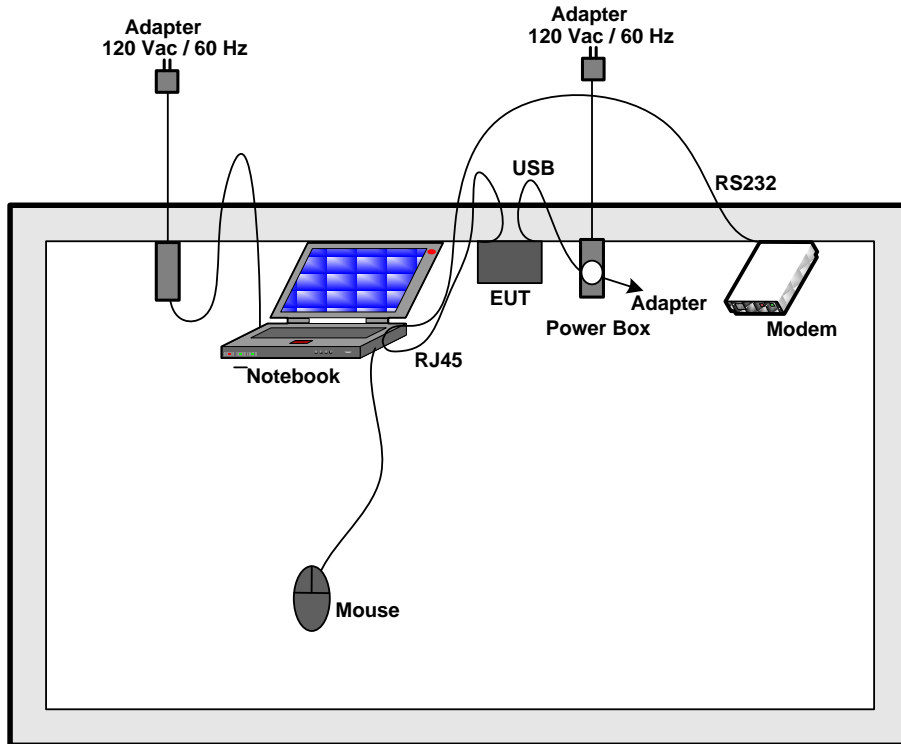

Mode 4

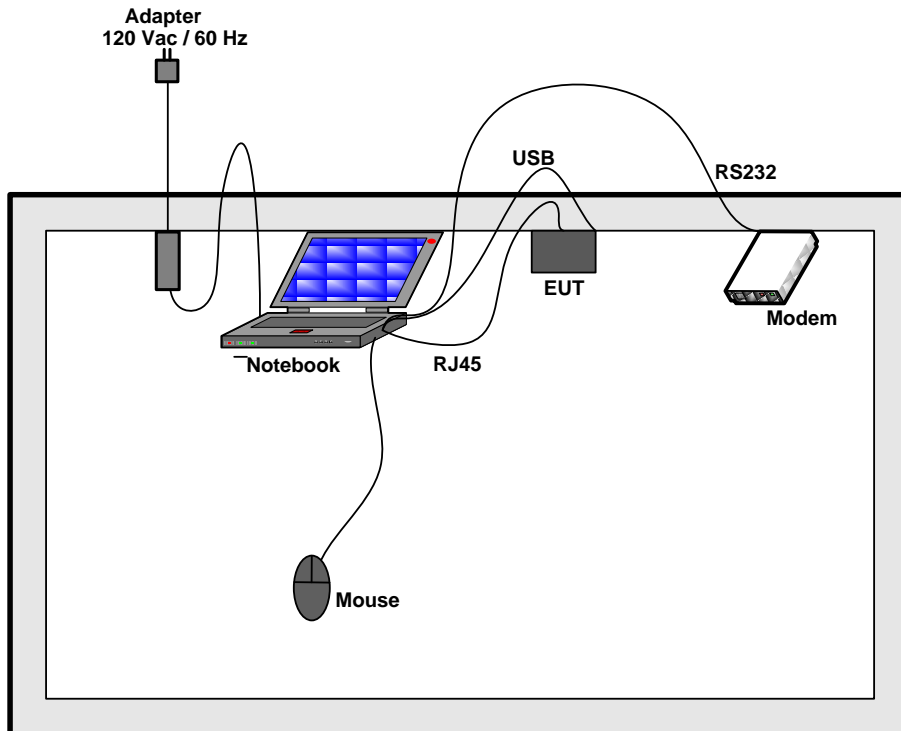

**For radiated emissions above 1GHz  
Mode 1**

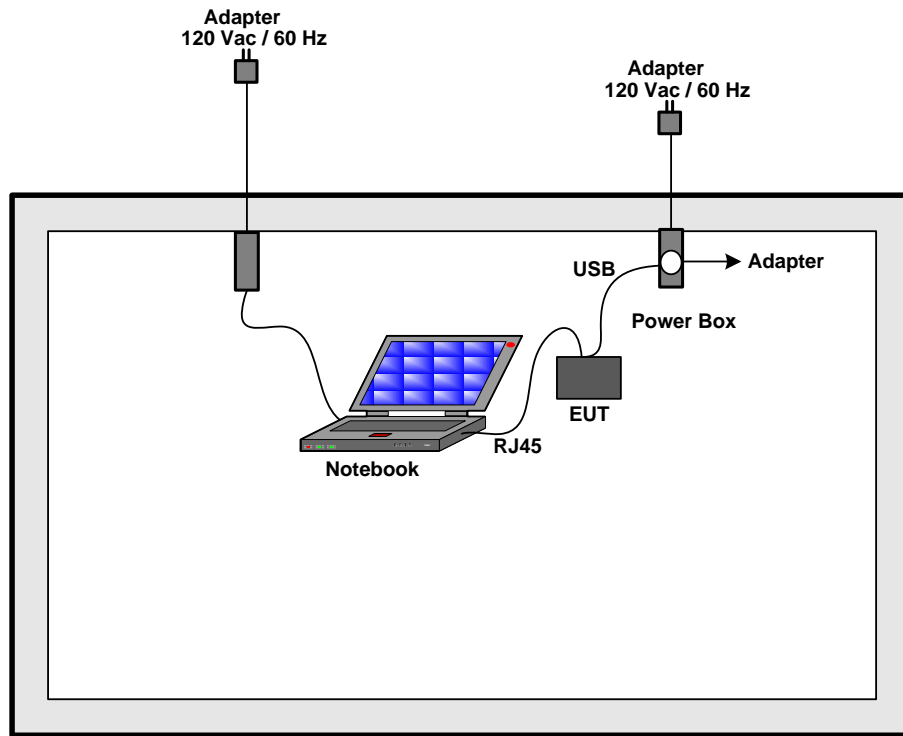

**3 TEST RESULT**

**3.1 AC Power Line Conducted Emissions Measurement**

**3.1.1 Limit**

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class B**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

**3.1.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

**3.1.3 Test Procedures**

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

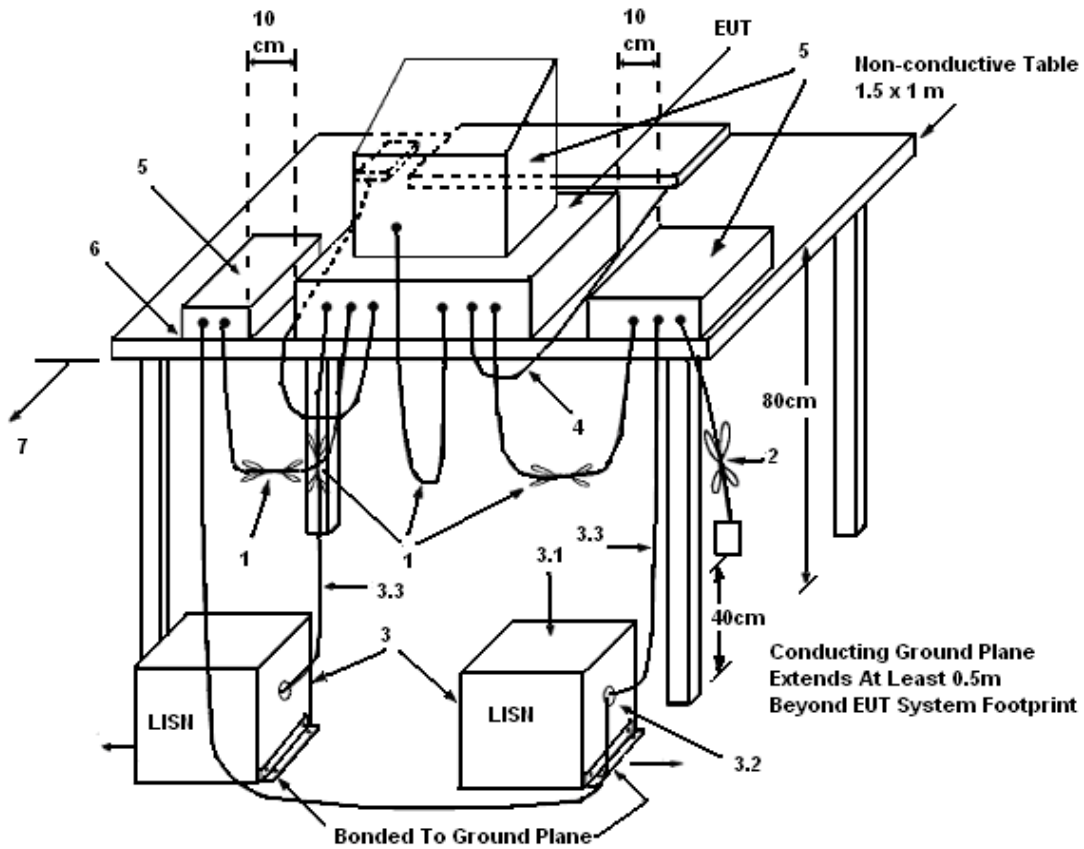

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

**3.1.7 Results of AC Power Line Conducted Emissions Measurement**

<b>Final Test Date</b>	Aug. 19, 2011	<b>Test Site No.</b>	CO01-NH
<b>Temperature</b>	24°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Mode 1


**Line**

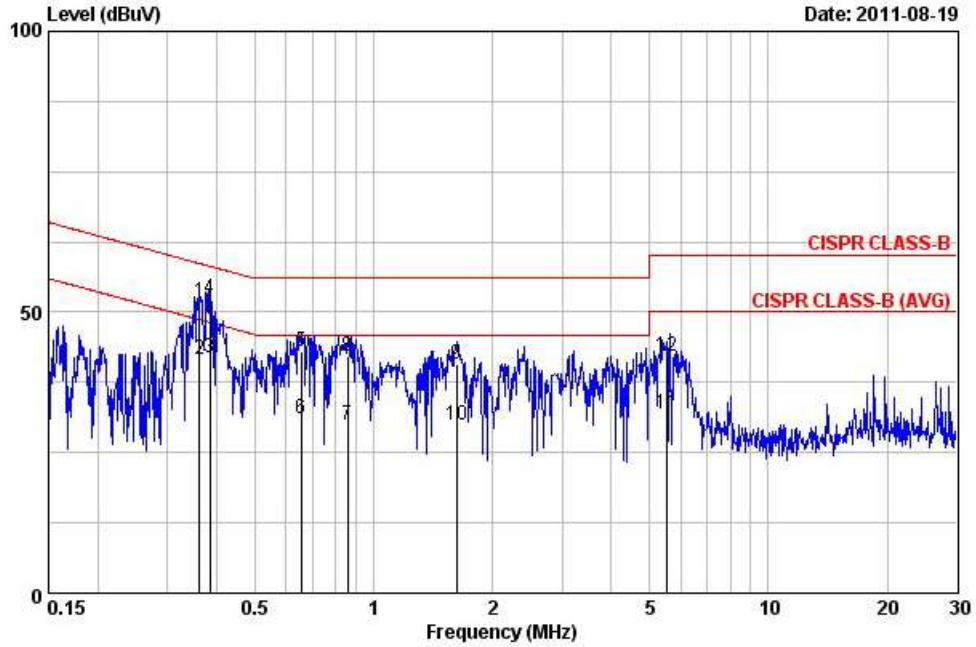

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.361	51.73	-6.97	58.69	41.59	10.04	0.10	QP
2	0.361	41.61	-7.09	48.69	31.47	10.04	0.10	AVERAGE
3	0.385	41.88	-6.29	48.17	31.74	10.04	0.10	AVERAGE
4	0.385	52.44	-5.73	58.17	42.30	10.04	0.10	QP
5	0.654	43.03	-12.97	56.00	32.88	10.05	0.10	QP
6	0.654	30.95	-15.05	46.00	20.80	10.05	0.10	AVERAGE
7	0.857	30.05	-15.95	46.00	19.90	10.05	0.10	AVERAGE
8	0.857	42.27	-13.73	56.00	32.12	10.05	0.10	QP
9	1.619	40.76	-15.24	56.00	30.53	10.06	0.17	QP
10	1.619	29.96	-16.04	46.00	19.73	10.06	0.17	AVERAGE
11	5.505	31.78	-18.22	50.00	21.45	10.12	0.20	AVERAGE
12	5.505	42.11	-17.89	60.00	31.78	10.12	0.20	QP



Neutral

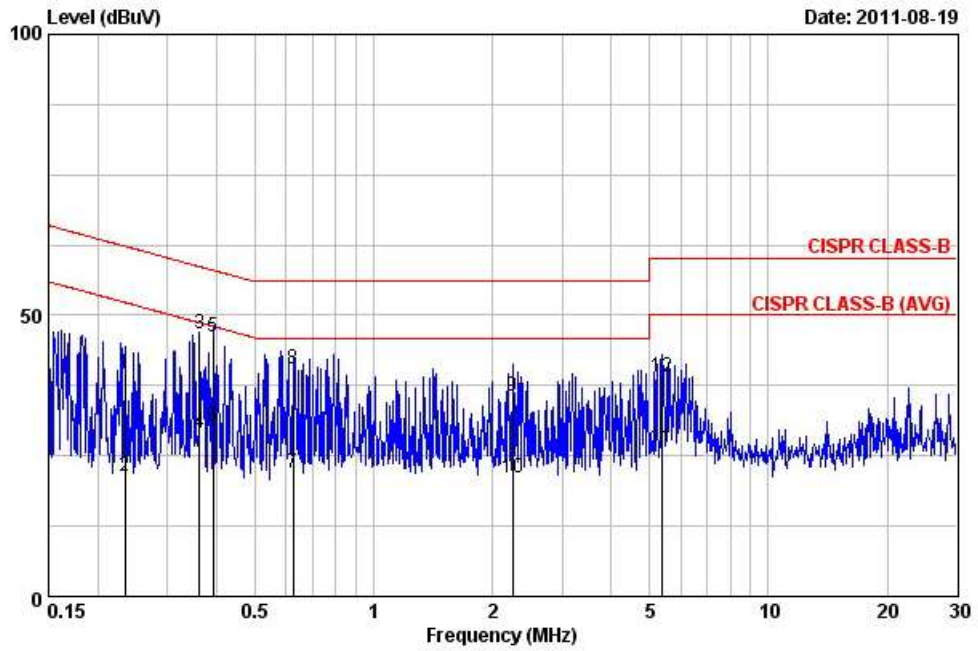


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.234	39.57	-22.74	62.30	29.48	9.98	0.10	QP
2	0.234	21.25	-31.06	52.30	11.16	9.98	0.10	AVERAGE
3	0.361	46.72	-11.98	58.69	36.63	9.99	0.10	QP
4	0.361	29.01	-19.69	48.69	18.92	9.99	0.10	AVERAGE
5	0.391	46.30	-11.74	58.03	36.21	9.99	0.10	QP
6	0.391	30.32	-17.72	48.03	20.23	9.99	0.10	AVERAGE
7	0.624	22.00	-24.00	46.00	11.91	9.99	0.10	AVERAGE
8	0.624	40.41	-15.59	56.00	30.32	9.99	0.10	QP
9	2.249	35.72	-20.28	56.00	25.50	10.01	0.20	QP
10	2.249	21.15	-24.85	46.00	10.93	10.01	0.20	AVERAGE
11	5.362	26.54	-23.46	50.00	16.28	10.06	0.20	AVERAGE
12	5.362	38.94	-21.06	60.00	28.68	10.06	0.20	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.


<b>Final Test Date</b>	Aug. 29, 2011	<b>Test Site No.</b>	CO01-NH
<b>Temperature</b>	24°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Mode 2

**Line**

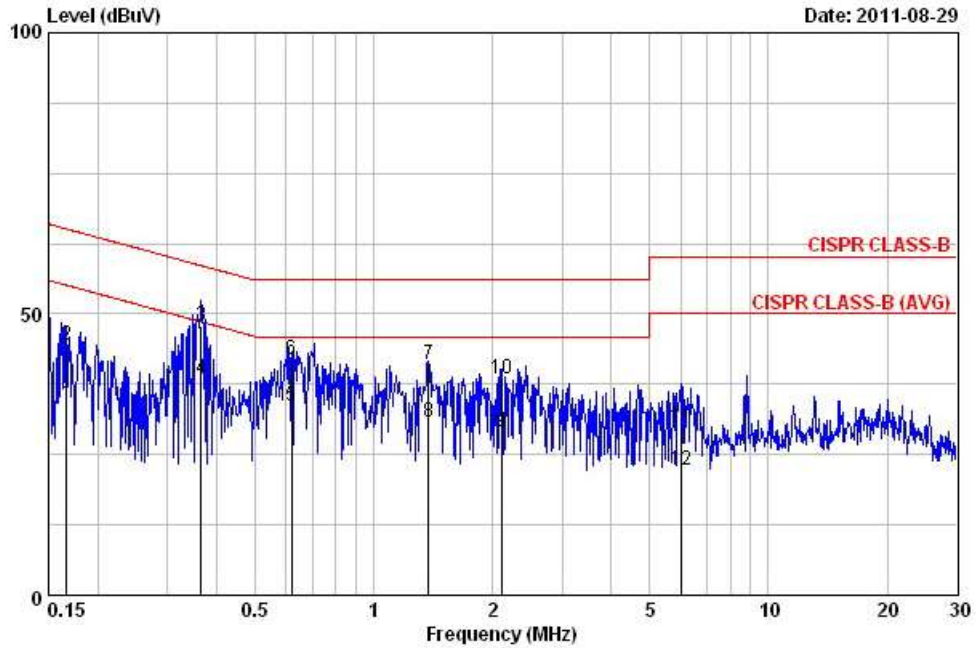

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.167	33.88	-21.24	55.12	23.75	10.04	0.10	AVERAGE
2	0.167	44.34	-20.78	65.12	34.21	10.04	0.10	QP
3	0.365	47.99	-10.61	58.61	37.86	10.04	0.10	QP
4	0.365	38.57	-10.03	48.61	28.44	10.04	0.10	AVERAGE
5	0.621	33.69	-12.31	46.00	23.55	10.04	0.10	AVERAGE
6	0.621	41.92	-14.08	56.00	31.78	10.04	0.10	QP
7	1.374	41.15	-14.85	56.00	30.95	10.06	0.15	QP
8	1.374	30.67	-15.33	46.00	20.47	10.06	0.15	AVERAGE
9	2.110	29.06	-16.94	46.00	18.79	10.07	0.20	AVERAGE
10	2.110	38.43	-17.57	56.00	28.16	10.07	0.20	QP
11	5.993	29.91	-30.09	60.00	19.58	10.13	0.20	QP
12	5.993	22.11	-27.89	50.00	11.78	10.13	0.20	AVERAGE

Neutral

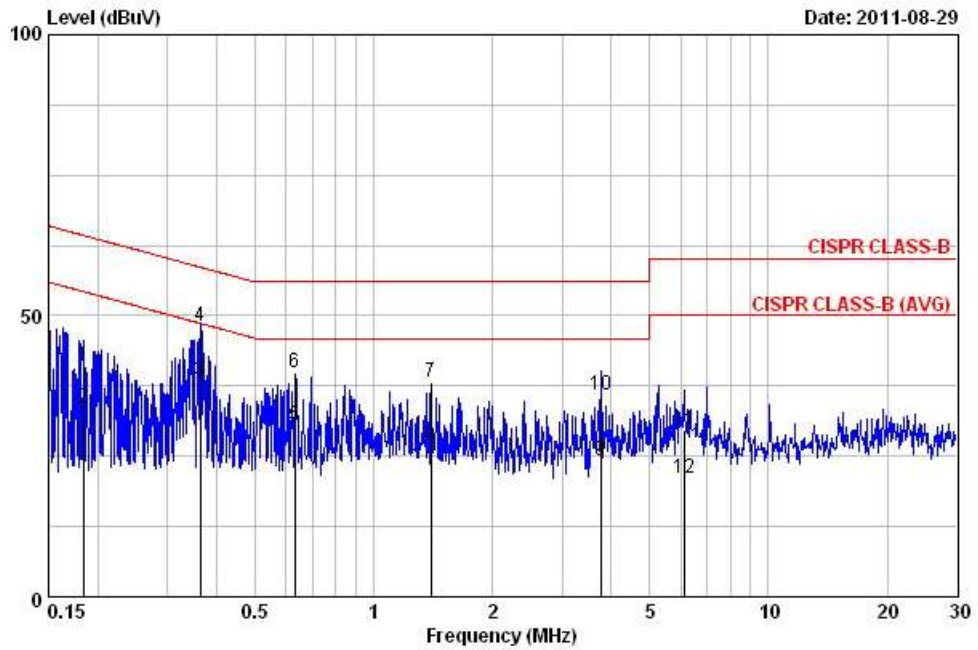


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.183	41.06	-23.27	64.33	30.98	9.98	0.10	QP
2	0.183	33.69	-20.64	54.33	23.61	9.98	0.10	AVERAGE
3	0.363	38.58	-10.07	48.65	28.49	9.99	0.10	AVERAGE
4	0.363	48.09	-10.56	58.65	38.00	9.99	0.10	QP
5	0.630	30.51	-15.49	46.00	20.42	9.99	0.10	AVERAGE
6	0.630	39.87	-16.13	56.00	29.78	9.99	0.10	QP
7	1.396	38.10	-17.90	56.00	27.95	10.00	0.15	QP
8	1.396	26.66	-19.34	46.00	16.51	10.00	0.15	AVERAGE
9	3.759	24.30	-21.70	46.00	14.07	10.03	0.20	AVERAGE
10	3.759	35.85	-20.15	56.00	25.62	10.03	0.20	QP
11	6.121	29.72	-30.28	60.00	19.45	10.07	0.20	QP
12	6.121	21.21	-28.79	50.00	10.94	10.07	0.20	AVERAGE

Note:  
Level = Read Level + LISN Factor + Cable Loss.


<b>Final Test Date</b>	Aug. 19, 2011	<b>Test Site No.</b>	CO01-NH
<b>Temperature</b>	24°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Mode 3

**Line**

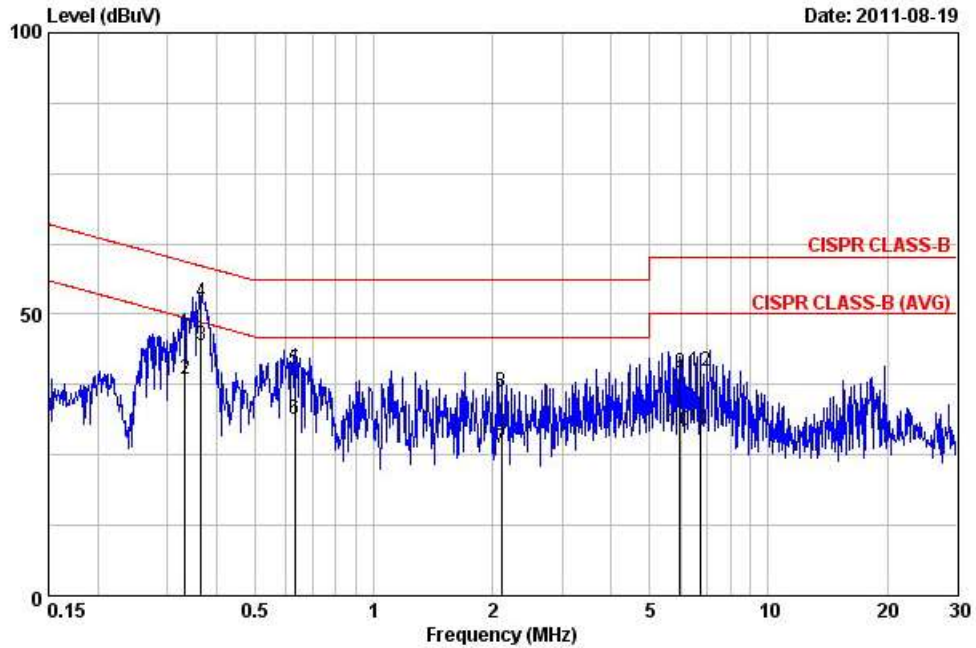

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.332	46.56	-12.84	59.40	36.42	10.04	0.10	QP
2	0.332	38.60	-10.80	49.40	28.46	10.04	0.10	AVERAGE
3	0.366	44.44	-4.15	48.59	34.31	10.04	0.10	AVERAGE
4	0.366	52.26	-6.33	58.59	42.13	10.04	0.10	QP
5	0.630	40.26	-15.74	56.00	30.12	10.04	0.10	QP
6	0.630	31.31	-14.69	46.00	21.17	10.04	0.10	AVERAGE
7	2.110	26.22	-19.78	46.00	15.95	10.07	0.20	AVERAGE
8	2.110	36.04	-19.96	56.00	25.77	10.07	0.20	QP
9	5.961	39.52	-20.48	60.00	29.19	10.13	0.20	QP
10	5.961	29.26	-20.74	50.00	18.93	10.13	0.20	AVERAGE
11	6.733	29.51	-20.49	50.00	19.17	10.14	0.20	AVERAGE
12	6.733	40.00	-20.00	60.00	29.66	10.14	0.20	QP

Neutral

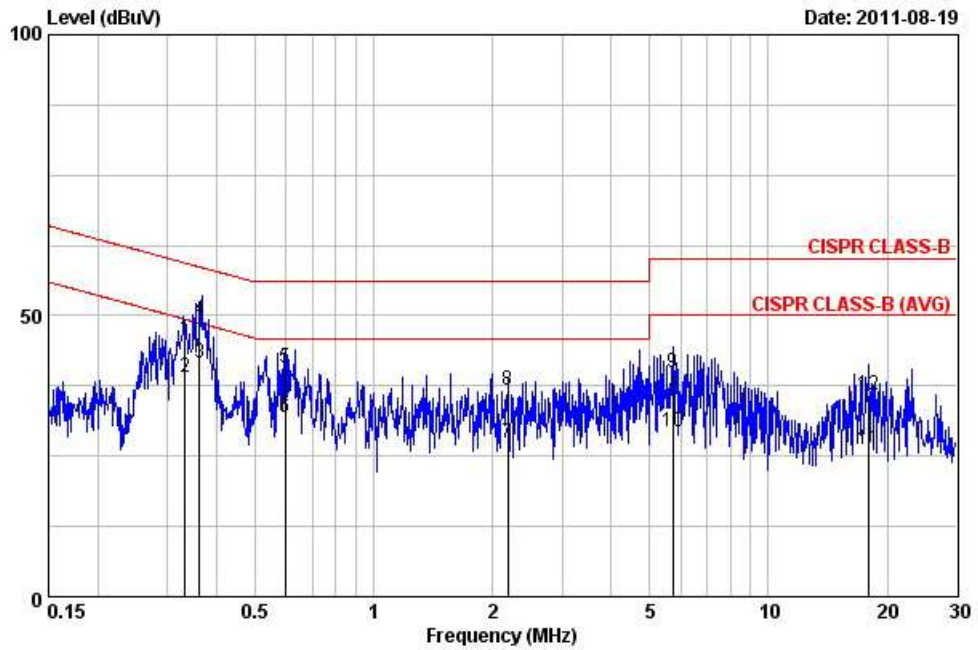


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.333	45.90	-13.48	59.38	35.81	9.99	0.10	QP
2	0.333	38.89	-10.49	49.38	28.80	9.99	0.10	AVERAGE
3	0.362	41.62	-7.06	48.68	31.53	9.99	0.10	AVERAGE
4	0.362	49.22	-9.46	58.68	39.13	9.99	0.10	QP
5	0.598	40.81	-15.19	56.00	30.72	9.99	0.10	QP
6	0.598	31.83	-14.17	46.00	21.74	9.99	0.10	AVERAGE
7	2.190	27.41	-18.59	46.00	17.20	10.01	0.20	AVERAGE
8	2.190	36.65	-19.35	56.00	26.44	10.01	0.20	QP
9	5.713	39.80	-20.20	60.00	29.54	10.06	0.20	QP
10	5.713	29.23	-20.77	50.00	18.97	10.06	0.20	AVERAGE
11	17.944	26.19	-23.81	50.00	15.67	10.26	0.26	AVERAGE
12	17.944	35.92	-24.08	60.00	25.40	10.26	0.26	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.

<b>Final Test Date</b>	Aug. 29, 2011	<b>Test Site No.</b>	CO01-NH
<b>Temperature</b>	24°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Mode 4


**Line**

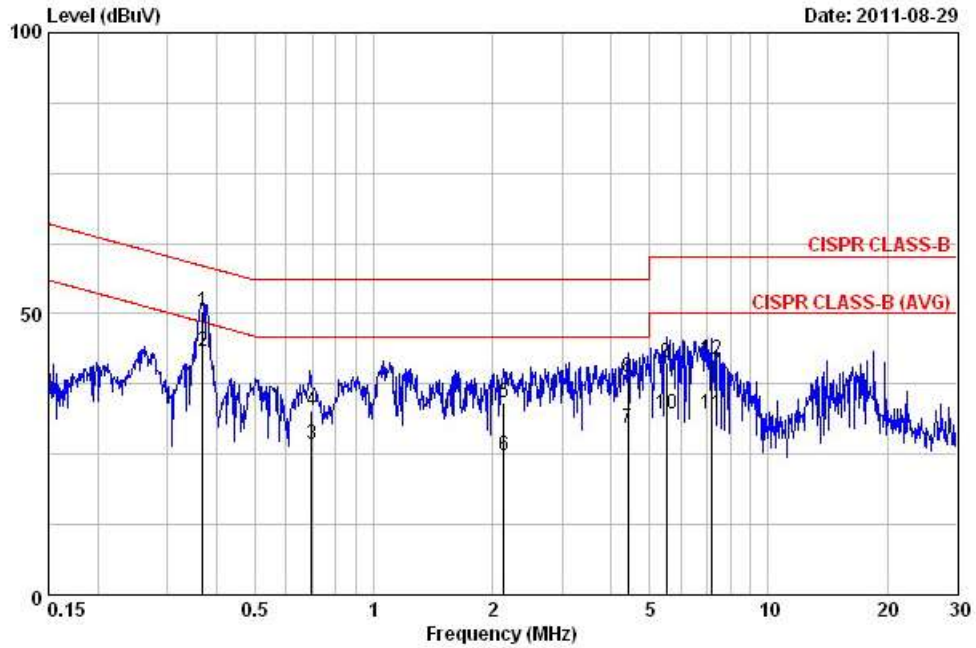

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.369	50.49	-8.03	58.52	40.35	10.04	0.10	QP
2	0.369	43.33	-5.20	48.52	33.19	10.04	0.10	AVERAGE
3	0.695	26.69	-19.31	46.00	16.55	10.05	0.10	AVERAGE
4	0.695	32.80	-23.20	56.00	22.66	10.05	0.10	QP
5	2.133	34.23	-21.77	56.00	23.96	10.07	0.20	QP
6	2.133	24.88	-21.12	46.00	14.61	10.07	0.20	AVERAGE
7	4.410	29.77	-16.23	46.00	19.47	10.10	0.20	AVERAGE
8	4.410	38.78	-17.22	56.00	28.48	10.10	0.20	QP
9	5.505	41.27	-18.73	60.00	30.94	10.12	0.20	QP
10	5.505	32.10	-17.90	50.00	21.77	10.12	0.20	AVERAGE
11	7.213	32.28	-17.72	50.00	21.93	10.15	0.20	AVERAGE
12	7.213	41.78	-18.22	60.00	31.43	10.15	0.20	QP



Neutral

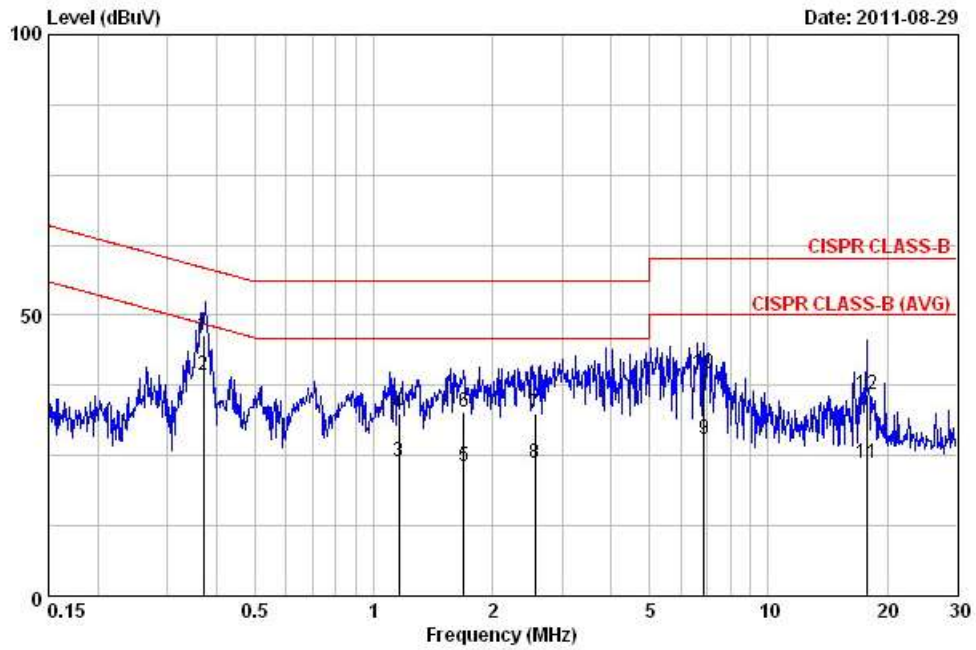


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.371	46.56	-11.91	58.47	36.47	9.99	0.10	QP
2	0.371	39.45	-9.03	48.47	29.36	9.99	0.10	AVERAGE
3	1.156	23.86	-22.14	46.00	13.76	9.99	0.11	AVERAGE
4	1.156	32.47	-23.53	56.00	22.36	9.99	0.11	QP
5	1.689	23.20	-22.80	46.00	13.02	10.01	0.18	AVERAGE
6	1.689	32.81	-23.19	56.00	22.63	10.01	0.18	QP
7	2.567	32.47	-23.53	56.00	22.26	10.02	0.20	QP
8	2.567	23.57	-22.43	46.00	13.36	10.02	0.20	AVERAGE
9	6.878	27.81	-22.19	50.00	17.52	10.08	0.20	AVERAGE
10	6.878	39.47	-20.53	60.00	29.19	10.08	0.20	QP
11	17.755	23.77	-26.23	50.00	13.26	10.25	0.26	AVERAGE
12	17.755	35.79	-24.21	60.00	25.28	10.25	0.26	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.

<b>Final Test Date</b>	Aug. 19, 2011	<b>Test Site No.</b>	CO01-NH
<b>Temperature</b>	24°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Mode 5


**Line**

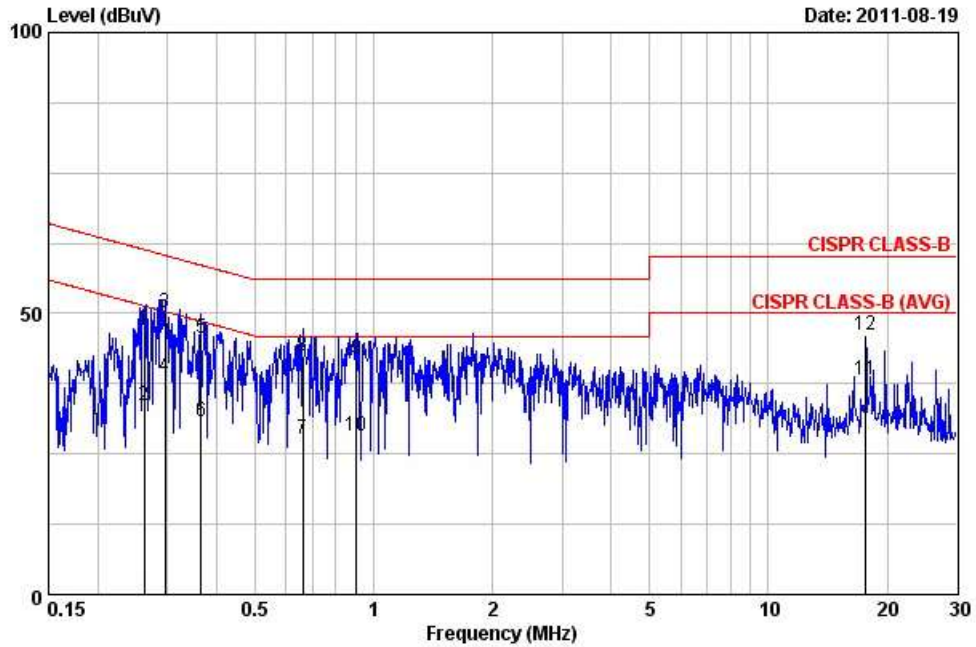

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.262	47.03	-14.35	61.38	36.89	10.03	0.10	QP
2	0.262	33.51	-17.87	51.38	23.37	10.03	0.10	AVERAGE
3	0.296	50.18	-10.18	60.37	40.05	10.04	0.10	QP
4	0.296	38.69	-11.67	50.37	28.56	10.04	0.10	AVERAGE
5	0.365	45.50	-13.10	58.61	35.37	10.04	0.10	QP
6	0.365	30.77	-17.83	48.61	20.64	10.04	0.10	AVERAGE
7	0.661	27.56	-18.44	46.00	17.41	10.05	0.10	AVERAGE
8	0.661	42.44	-13.56	56.00	32.29	10.05	0.10	QP
9	0.904	42.01	-13.99	56.00	31.86	10.05	0.10	QP
10	0.904	28.14	-17.86	46.00	17.99	10.05	0.10	AVERAGE
11	17.693	38.06	-11.94	50.00	27.51	10.29	0.26	AVERAGE
12	17.693	46.16	-13.84	60.00	35.61	10.29	0.26	QP



Neutral

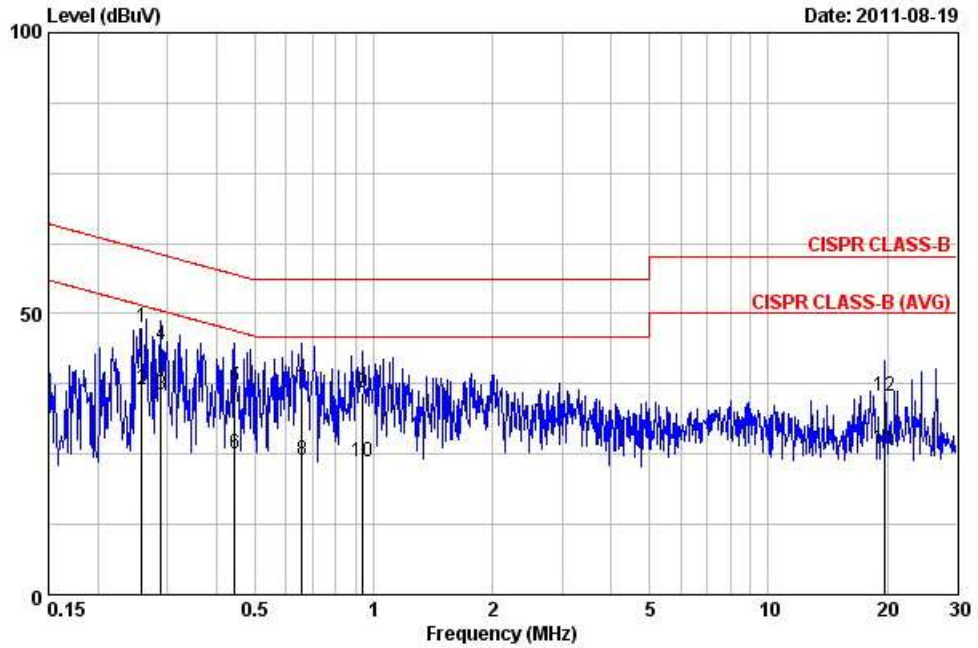


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.259	47.59	-13.88	61.47	37.51	9.98	0.10	QP
2	0.259	36.38	-15.09	51.47	26.30	9.98	0.10	AVERAGE
3	0.289	35.75	-14.79	50.54	25.66	9.99	0.10	AVERAGE
4	0.289	44.58	-15.96	60.54	34.49	9.99	0.10	QP
5	0.444	37.03	-19.95	56.98	26.94	9.99	0.10	QP
6	0.444	25.21	-21.77	46.98	15.12	9.99	0.10	AVERAGE
7	0.658	36.59	-19.41	56.00	26.50	9.99	0.10	QP
8	0.658	23.96	-22.04	46.00	13.87	9.99	0.10	AVERAGE
9	0.938	35.76	-20.24	56.00	25.67	9.99	0.10	QP
10	0.938	23.57	-22.43	46.00	13.48	9.99	0.10	AVERAGE
11	19.713	26.05	-23.95	50.00	15.48	10.28	0.29	AVERAGE
12	19.713	35.29	-24.71	60.00	24.72	10.28	0.29	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.


<b>Final Test Date</b>	Aug. 29, 2011	<b>Test Site No.</b>	CO01-NH
<b>Temperature</b>	24°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Mode 6

**Line**

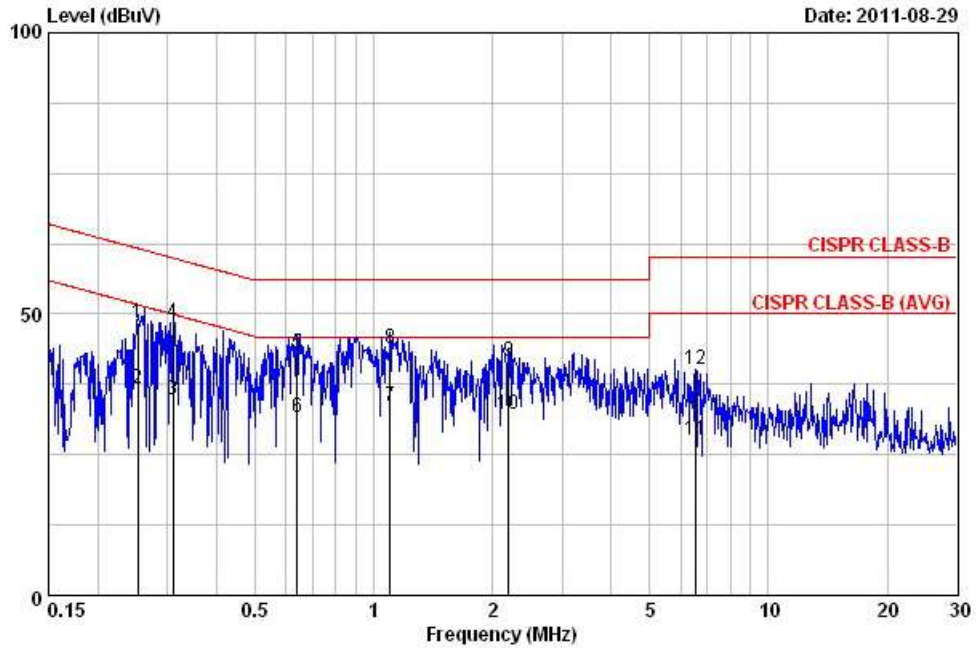

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.252	48.35	-13.34	61.69	38.21	10.03	0.10	QP
2	0.252	36.70	-14.99	51.69	26.56	10.03	0.10	AVERAGE
3	0.310	34.67	-15.30	49.97	24.53	10.04	0.10	AVERAGE
4	0.310	48.40	-11.57	59.97	38.26	10.04	0.10	QP
5	0.641	43.07	-12.93	56.00	32.92	10.05	0.10	QP
6	0.641	31.62	-14.38	46.00	21.47	10.05	0.10	AVERAGE
7	1.100	33.68	-12.32	46.00	23.51	10.05	0.11	AVERAGE
8	1.100	44.00	-12.00	56.00	33.83	10.05	0.11	QP
9	2.201	41.47	-14.53	56.00	31.20	10.07	0.20	QP
10	2.201	32.08	-13.92	46.00	21.81	10.07	0.20	AVERAGE
11	6.523	27.59	-22.41	50.00	17.25	10.14	0.20	AVERAGE
12	6.523	40.30	-19.70	60.00	29.96	10.14	0.20	QP

Neutral

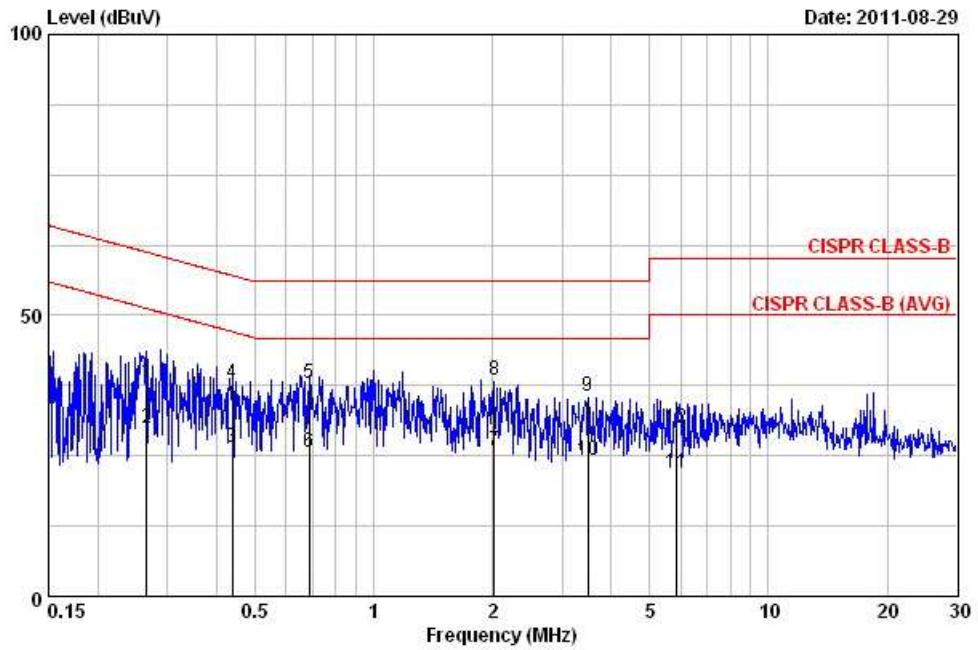


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.266	38.06	-23.19	61.25	27.98	9.98	0.10	QP
2	0.266	29.80	-21.45	51.25	19.72	9.98	0.10	AVERAGE
3	0.437	26.55	-20.56	47.11	16.46	9.99	0.10	AVERAGE
4	0.437	37.96	-19.15	57.11	27.87	9.99	0.10	QP
5	0.686	37.94	-18.06	56.00	27.85	9.99	0.10	QP
6	0.686	25.61	-20.39	46.00	15.52	9.99	0.10	AVERAGE
7	2.023	25.80	-20.20	46.00	15.59	10.01	0.20	AVERAGE
8	2.023	38.43	-17.57	56.00	28.22	10.01	0.20	QP
9	3.491	35.69	-20.31	56.00	25.46	10.03	0.20	QP
10	3.491	24.14	-21.86	46.00	13.91	10.03	0.20	AVERAGE
11	5.836	22.01	-27.99	50.00	11.74	10.07	0.20	AVERAGE
12	5.836	29.85	-30.15	60.00	19.58	10.07	0.20	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.


<b>Final Test Date</b>	Aug. 18, 2011	<b>Test Site No.</b>	CO01-NH
<b>Temperature</b>	24°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	Mode 7

**Line**

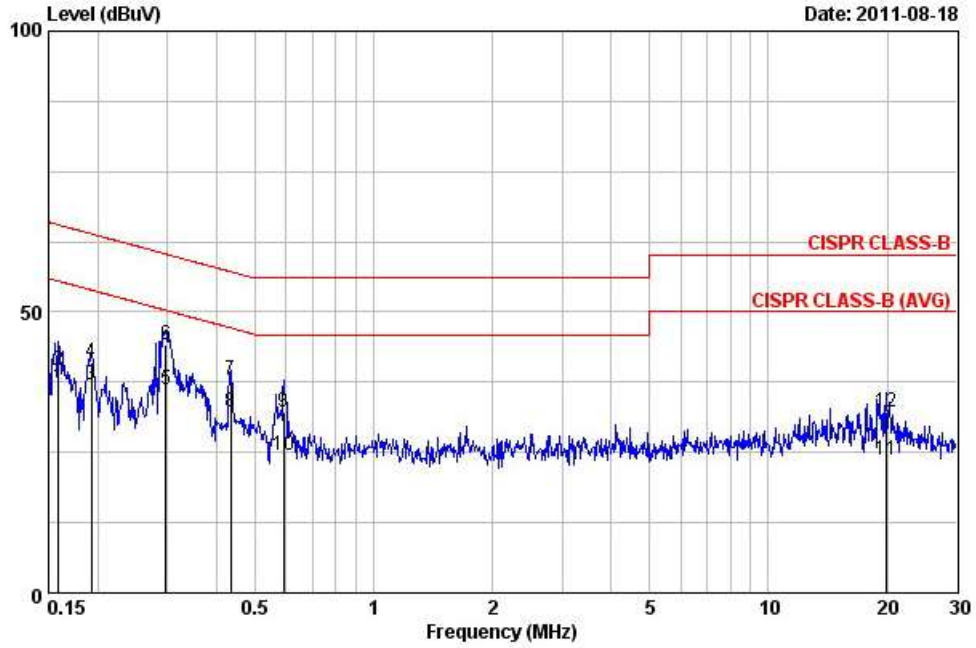

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.159	36.75	-18.77	55.52	26.61	10.04	0.10	AVERAGE
2	0.159	39.68	-25.84	65.52	29.54	10.04	0.10	QP
3	0.192	36.91	-17.02	53.93	26.78	10.03	0.10	AVERAGE
4	0.192	40.97	-22.96	63.93	30.84	10.03	0.10	QP
5	0.297	36.13	-14.19	50.32	26.00	10.04	0.10	AVERAGE
6	0.297	44.13	-16.19	60.32	34.00	10.04	0.10	QP
7	0.434	38.01	-19.17	57.18	27.87	10.04	0.10	QP
8	0.434	32.28	-14.90	47.18	22.14	10.04	0.10	AVERAGE
9	0.592	32.24	-23.76	56.00	22.09	10.04	0.10	QP
10	0.592	24.38	-21.62	46.00	14.23	10.04	0.10	AVERAGE
11	19.950	23.54	-26.46	50.00	12.92	10.32	0.30	AVERAGE
12	19.950	32.23	-27.77	60.00	21.61	10.32	0.30	QP

Neutral

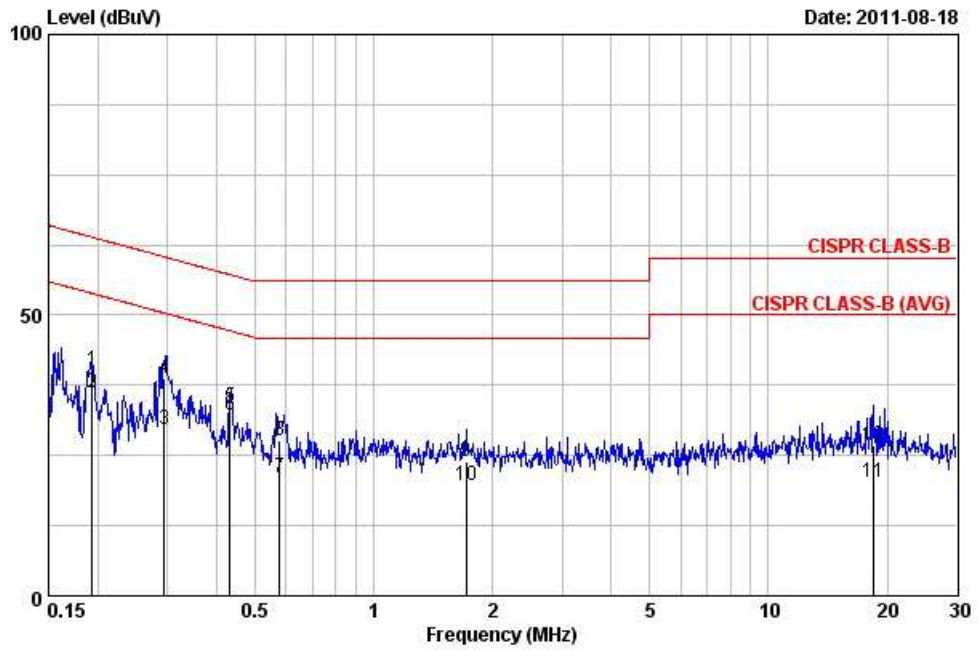


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.193	40.25	-23.64	63.89	30.17	9.98	0.10	QP
2	0.193	36.30	-17.59	53.89	26.22	9.98	0.10	AVERAGE
3	0.294	29.70	-20.71	50.41	19.62	9.99	0.10	AVERAGE
4	0.294	38.74	-21.67	60.41	28.66	9.99	0.10	QP
5	0.432	33.58	-23.63	57.21	23.49	9.99	0.10	QP
6	0.432	32.28	-14.93	47.21	22.19	9.99	0.10	AVERAGE
7	0.576	21.14	-24.86	46.00	11.05	9.99	0.10	AVERAGE
8	0.576	27.61	-28.39	56.00	17.52	9.99	0.10	QP
9	1.716	24.06	-31.94	56.00	13.88	10.01	0.18	QP
10	1.716	19.64	-26.36	46.00	9.46	10.01	0.18	AVERAGE
11	18.426	20.16	-29.84	50.00	9.63	10.26	0.27	AVERAGE
12	18.426	26.80	-33.20	60.00	16.27	10.26	0.27	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.

Final Test Date	Aug. 29, 2011	Test Site No.	CO01-NH
Temperature	24°C	Humidity	54%
Test Engineer	Eddie	Configuration	Mode 8


Line

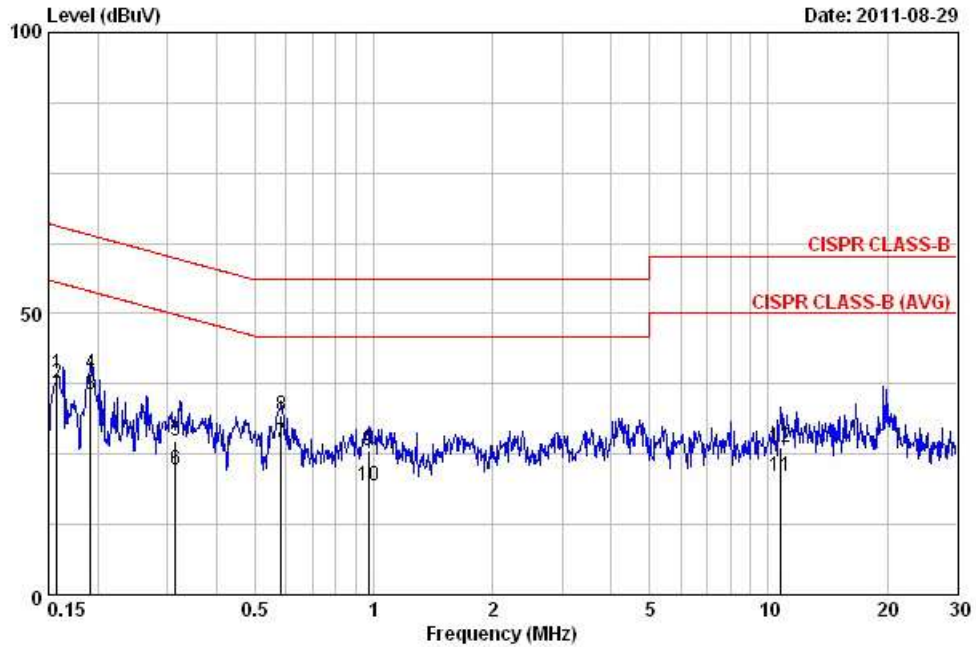

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.157	39.37	-26.24	65.60	29.23	10.04	0.10	QP
2	0.157	37.73	-17.88	55.60	27.59	10.04	0.10	AVERAGE
3	0.191	35.57	-18.41	53.98	25.44	10.03	0.10	AVERAGE
4	0.191	39.41	-24.57	63.98	29.28	10.03	0.10	QP
5	0.315	27.47	-32.37	59.84	17.33	10.04	0.10	QP
6	0.315	22.22	-27.62	49.84	12.08	10.04	0.10	AVERAGE
7	0.582	26.98	-19.02	46.00	16.83	10.04	0.10	AVERAGE
8	0.582	31.86	-24.14	56.00	21.71	10.04	0.10	QP
9	0.968	25.51	-30.49	56.00	15.36	10.05	0.10	QP
10	0.968	19.50	-26.50	46.00	9.35	10.05	0.10	AVERAGE
11	10.733	21.04	-28.96	50.00	10.64	10.19	0.20	AVERAGE
12	10.733	26.30	-33.70	60.00	15.90	10.19	0.20	QP



Neutral

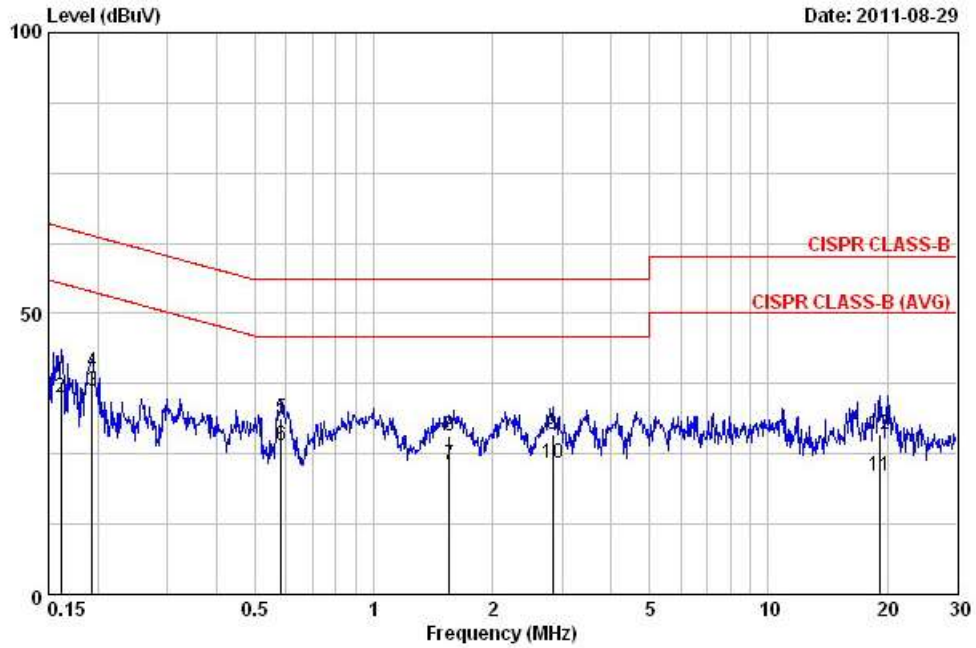

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.162	38.00	-27.39	65.38	27.92	9.98	0.10	QP
2	0.162	34.95	-20.44	55.38	24.87	9.98	0.10	AVERAGE
3	0.193	36.07	-17.82	53.89	25.99	9.98	0.10	AVERAGE
4	0.193	39.48	-24.41	63.89	29.40	9.98	0.10	QP
5	0.582	31.39	-24.61	56.00	21.30	9.99	0.10	QP
6	0.582	26.59	-19.41	46.00	16.50	9.99	0.10	AVERAGE
7	1.552	23.12	-22.88	46.00	12.95	10.00	0.16	AVERAGE
8	1.552	28.29	-27.71	56.00	18.12	10.00	0.16	QP
9	2.839	28.38	-27.62	56.00	18.16	10.02	0.20	QP
10	2.839	23.37	-22.63	46.00	13.15	10.02	0.20	AVERAGE
11	19.122	21.18	-28.82	50.00	10.63	10.27	0.28	AVERAGE
12	19.122	28.47	-31.53	60.00	17.92	10.27	0.28	QP

Note:  
Level = Read Level + LISN Factor + Cable Loss.

**3.2 99% Occupied Bandwidth Measurement**

**3.2.1 Limit**

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameters</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.2.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner. (Only for IEEE 802.11n test)

**3.2.4 Test Setup Layout**

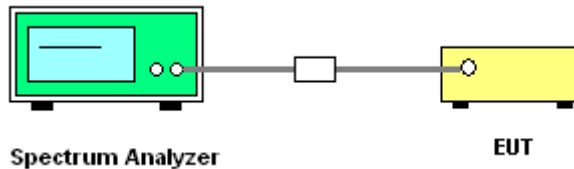

**3.2.5 Test Deviation**

There is no deviation with the original standard.

**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.



**3.2.7 Test Result of 99% Occupied Bandwidth**

<b>Final Test Date</b>	Sep. 17, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	23.2°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Cain	<b>Configurations</b>	802.11a/n

**For Single Chain:  
Configuration of IEEE 802.11a**

<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	22.80	17.00
40	5200 MHz	22.60	17.10
48	5240 MHz	22.60	17.10

**Configuration of IEEE 802.11n (20MHz)**

<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	23.60	18.00
40	5200 MHz	23.50	18.10
48	5240 MHz	23.30	18.10

**Configuration of IEEE 802.11n (40MHz)**

<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
38	5190 MHz	40.80	36.20
46	5230 MHz	41.00	36.20

**For Two Chain:****Configuration of IEEE 802.11n Ant. A (20MHz)**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.40	18.10
40	5200 MHz	23.20	18.10
48	5240 MHz	23.30	18.10

**Configuration of IEEE 802.11n Ant. B (20MHz)**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.50	17.80
40	5200 MHz	22.70	17.80
48	5240 MHz	22.60	17.90


**Configuration of IEEE 802.11n Ant. A (40MHz)**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	41.00	36.20
46	5230 MHz	41.00	36.00

**Configuration of IEEE 802.11n Ant. B (40MHz)**


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	40.00	36.00
46	5230 MHz	40.20	36.00

For Single Chain:  
26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

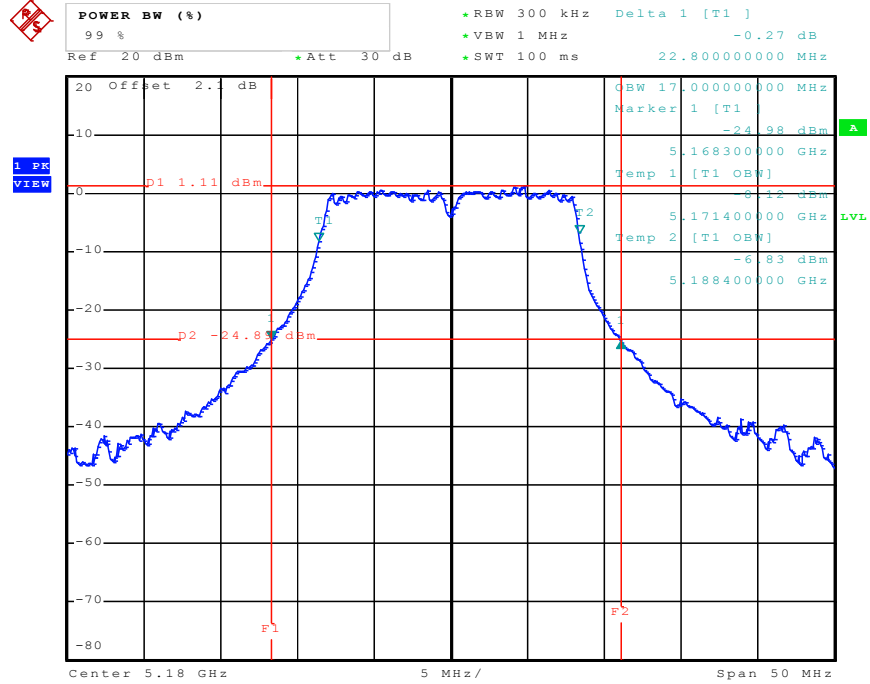


Date: 15.SEP.2011 22:30:22

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

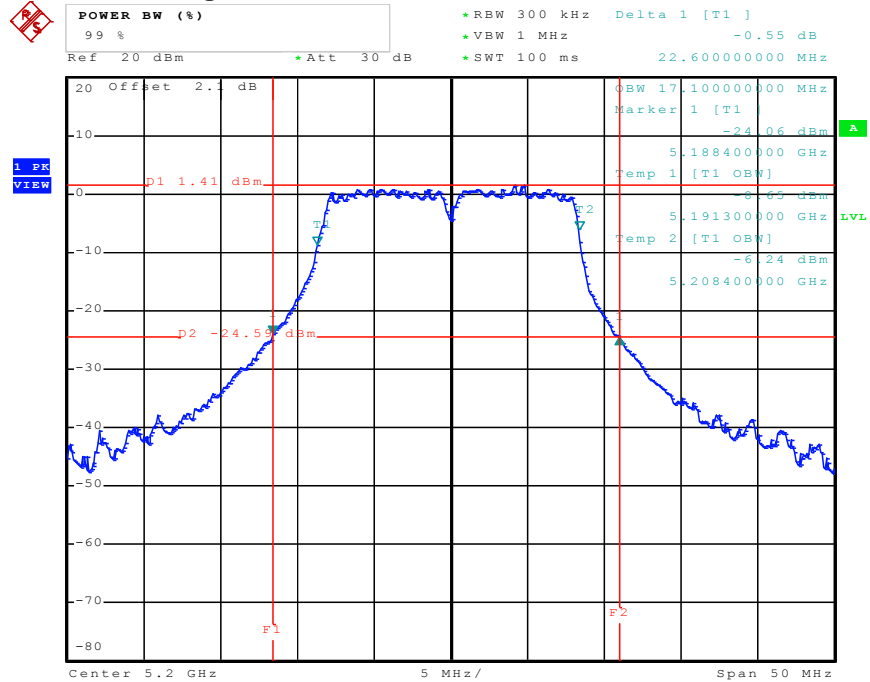


Date: 15.SEP.2011 22:45:33

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

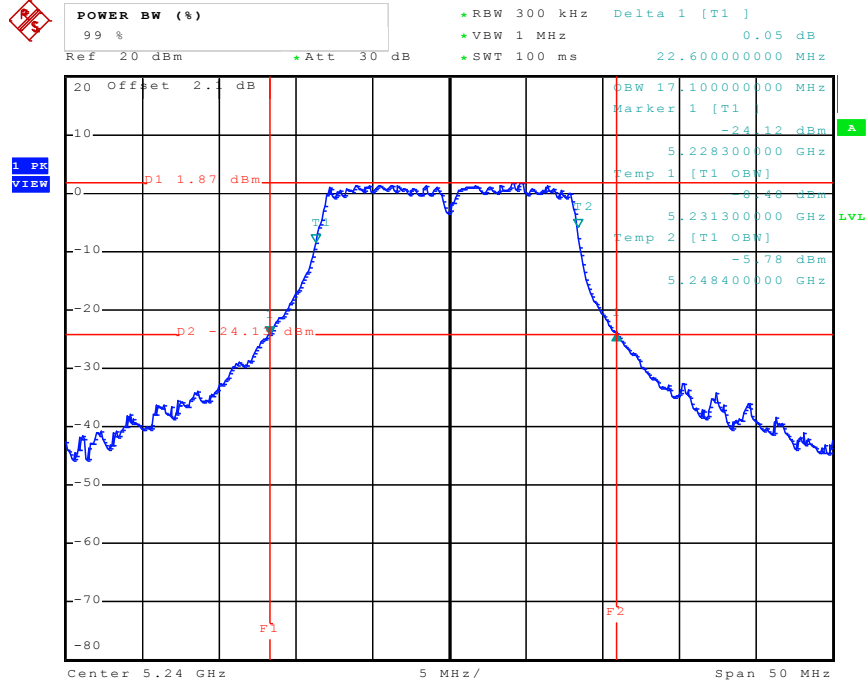


Date: 15.SEP.2011 22:47:04

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5180 MHz

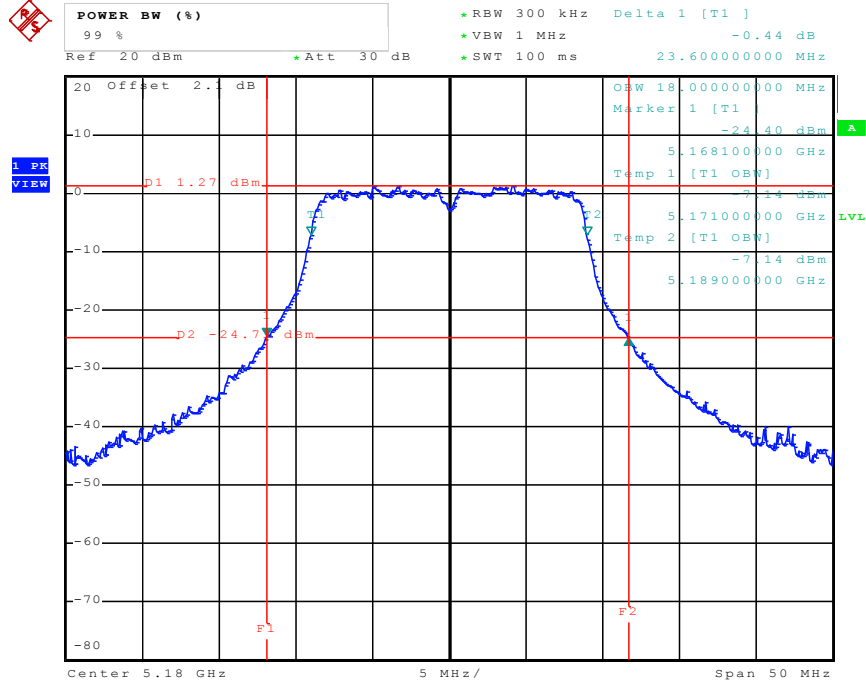


Date: 15.SEP.2011 23:32:21

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

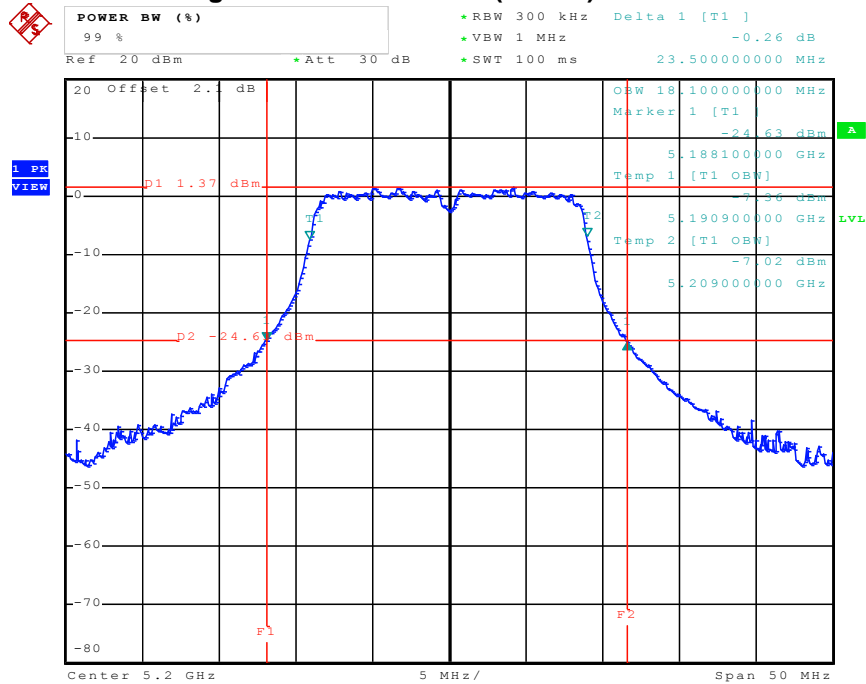


Date: 15.SEP.2011 23:51:53

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

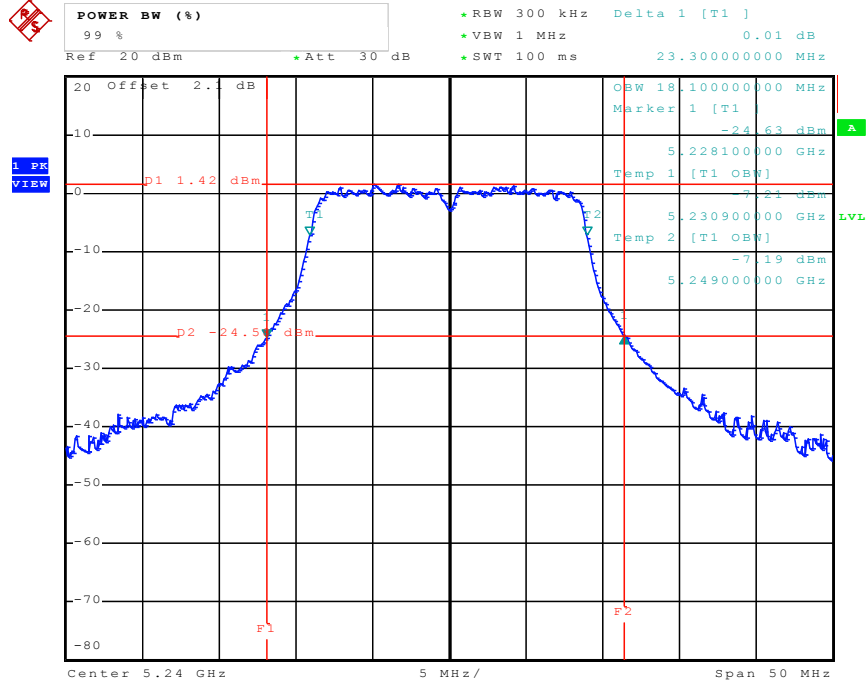


Date: 15.SEP.2011 23:52:59

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

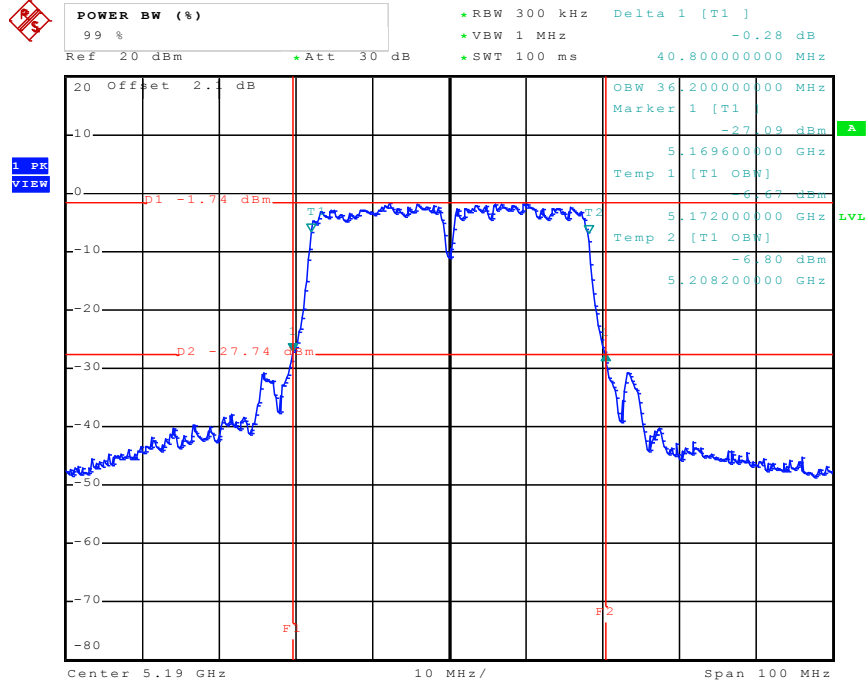


Date: 16.SEP.2011 02:28:12

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

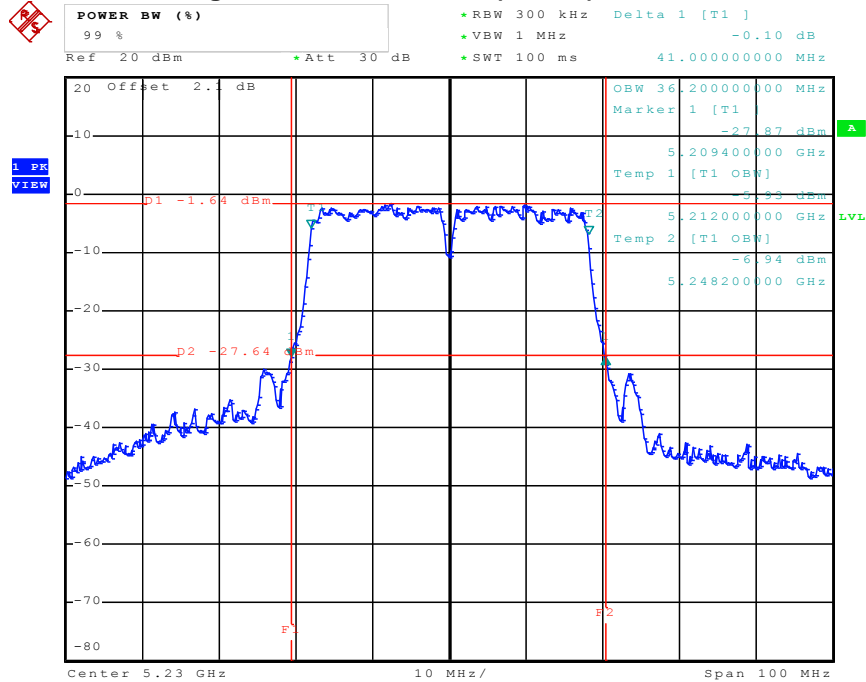


Date: 16.SEP.2011 02:41:58

For Two Chain:  
26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A (20MHz)/ 5180 MHz

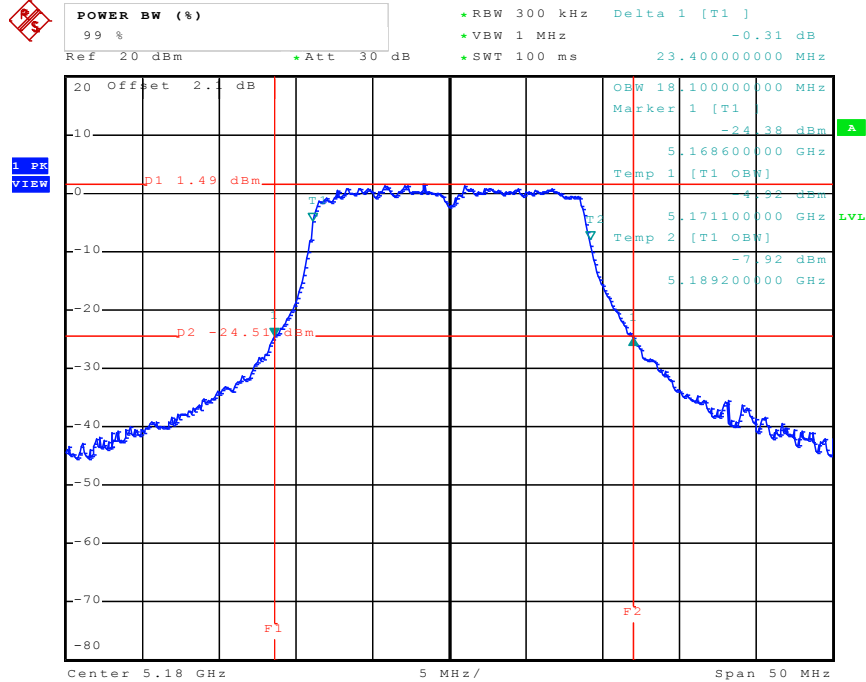

Date: 16.SEP.2011 21:36:51


26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5200 MHz

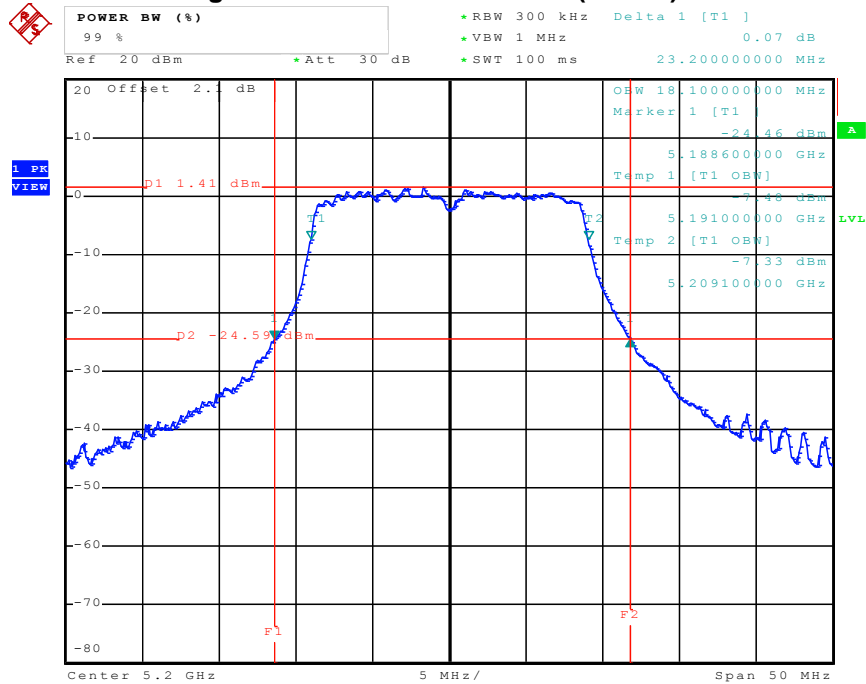

Date: 16.SEP.2011 21:58:21




26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5240 MHz

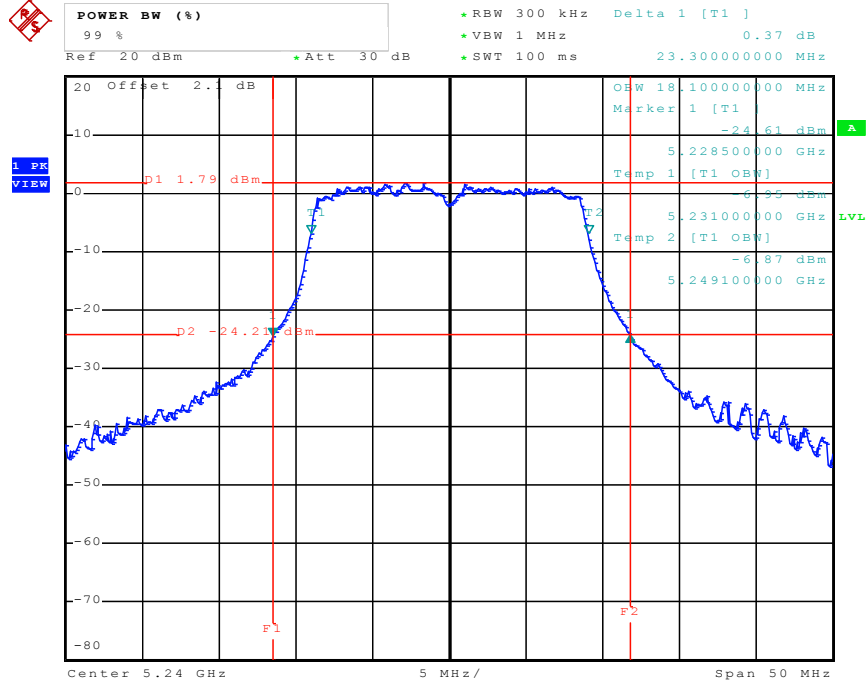


Date: 16.SEP.2011 22:00:28

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. B (20MHz)/ 5180 MHz

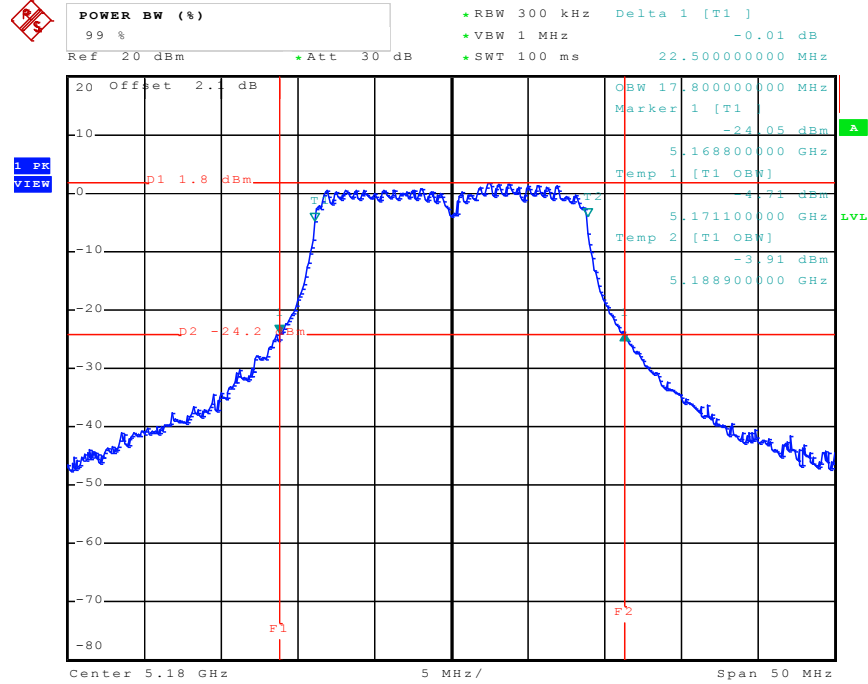


Date: 16.SEP.2011 23:10:29

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5200 MHz

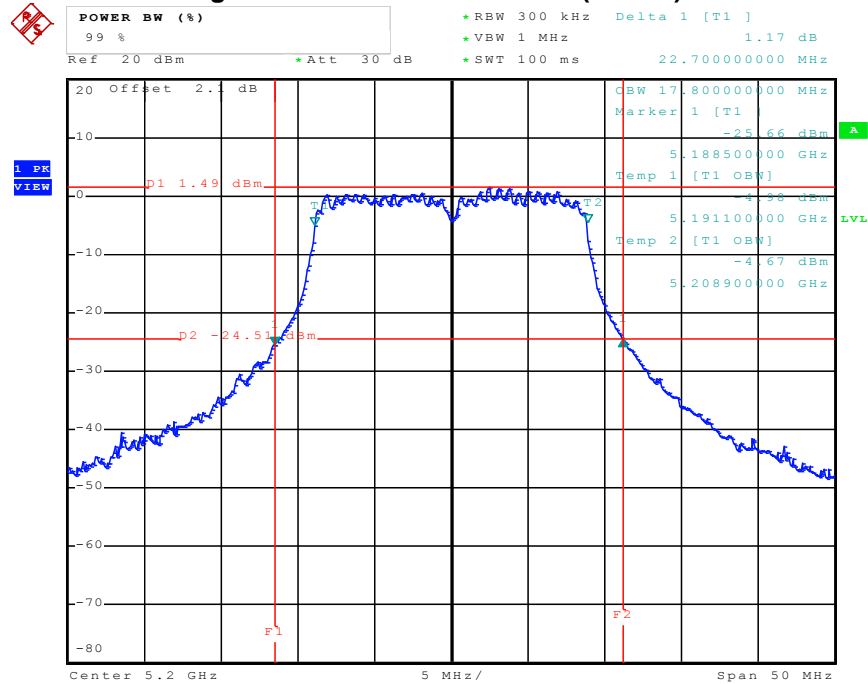


Date: 16.SEP.2011 23:20:38

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5240 MHz

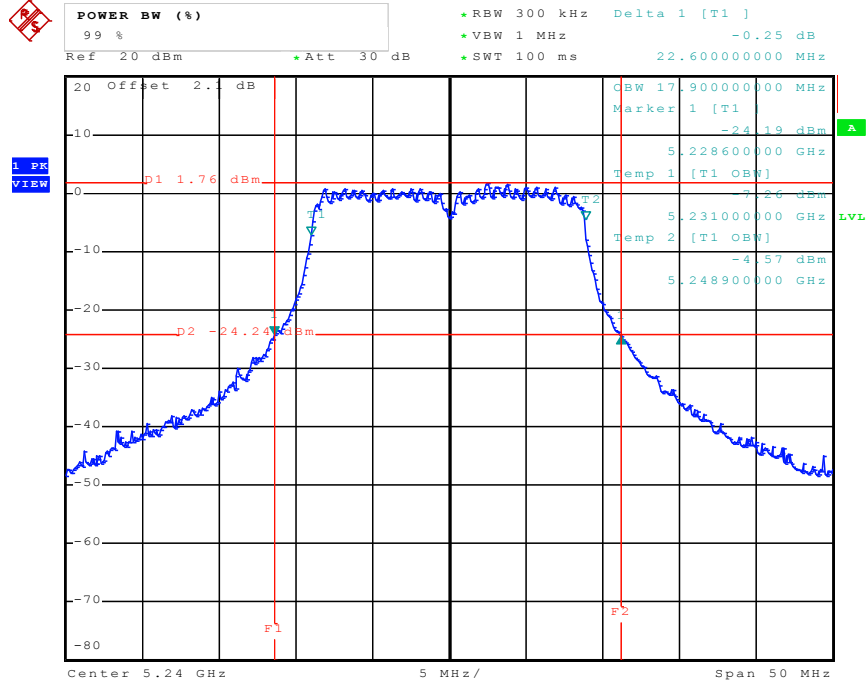


Date: 16.SEP.2011 23:21:41

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5190 MHz

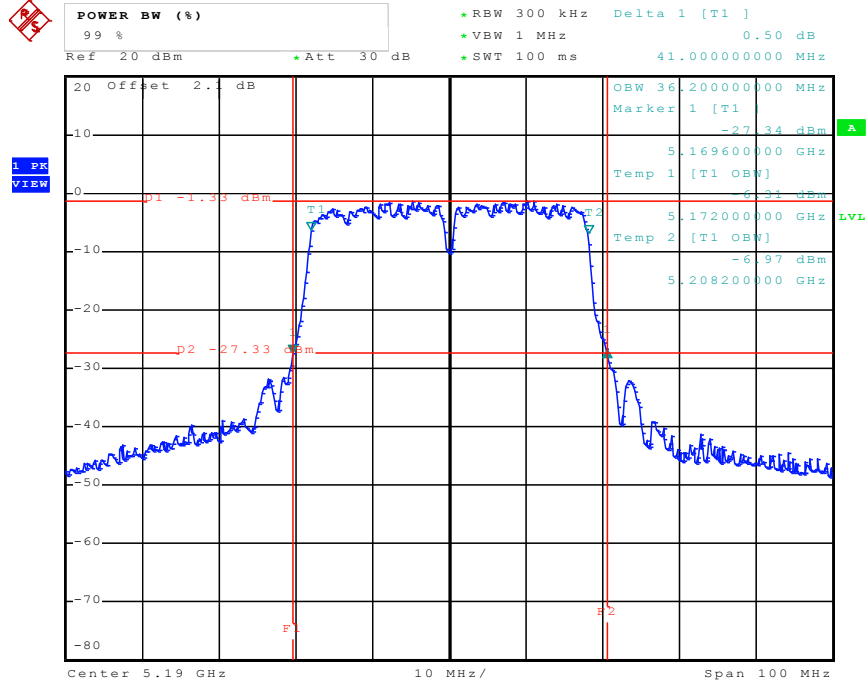


Date: 16.SEP.2011 22:53:08

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5230 MHz

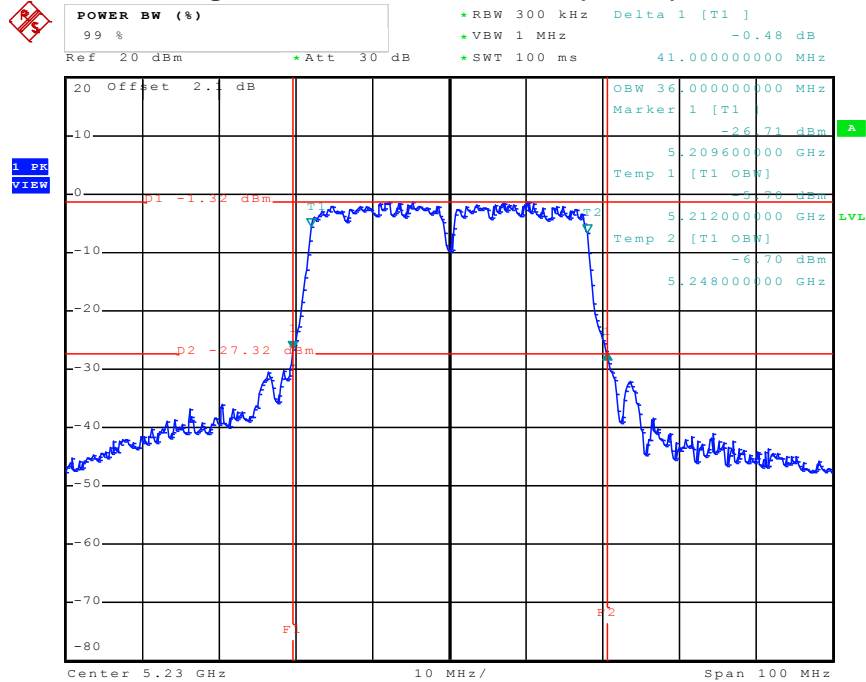


Date: 16.SEP.2011 23:03:25

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5190 MHz

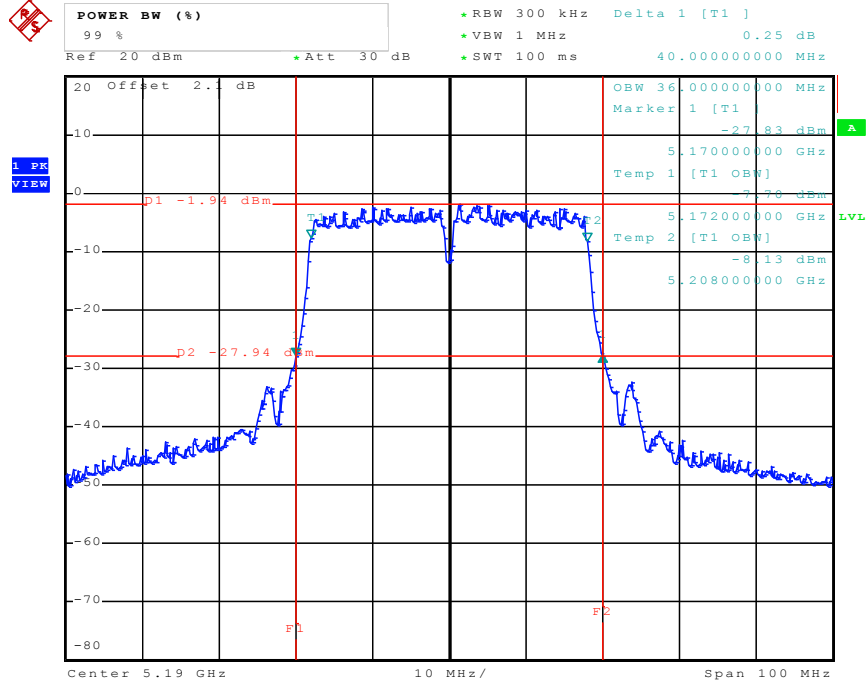

Date: 17.SEP.2011 00:05:26

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5230 MHz

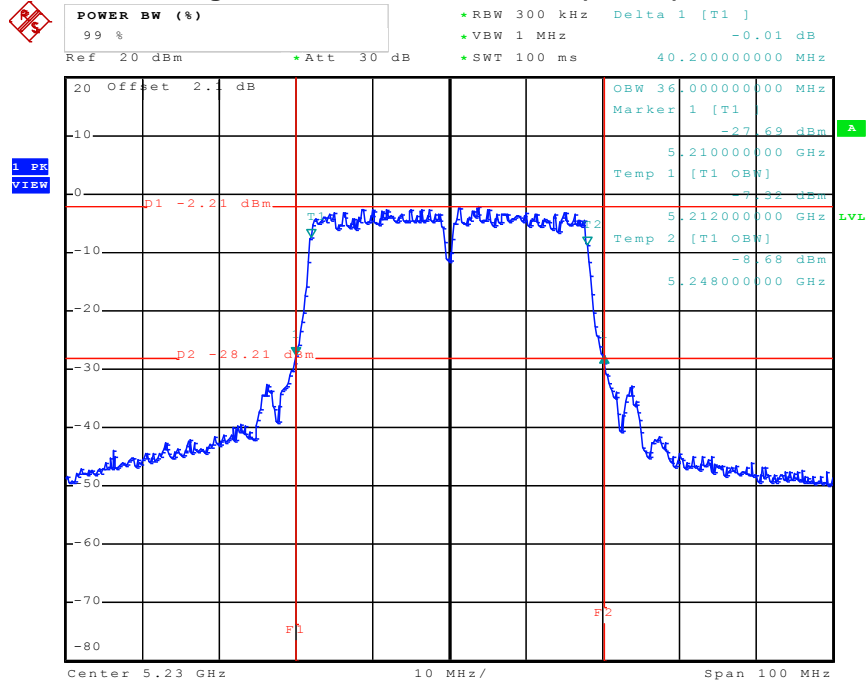

Date: 17.SEP.2011 00:12:47

**3.3 Maximum Conducted Output Power Measurement**

**3.3.1 Limit**

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Maximum Conducted Output Power mean that the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Power Meter Parameter</b>	<b>Setting</b>
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Sensor	MA2411B

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the wideband power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.
4. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

**3.3.4 Test Setup Layout**

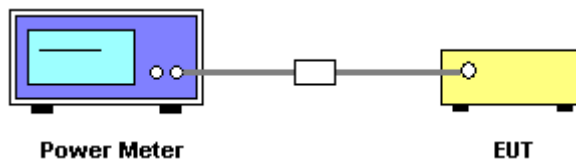

**3.3.5 Test Deviation**

There is no deviation with the original standard.

**3.3.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.3.7 Test Result of Maximum Conducted Output Power**

<b>Final Test Date</b>	Sep. 17, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	23.2°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Cain	<b>Configurations</b>	802.11a/n

**For Single Chain:**

**Configuration of IEEE 802.11a**

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
36	5180 MHz	11.42	17	<b>Complies</b>
40	5200 MHz	11.36	17	<b>Complies</b>
48	5240 MHz	11.53	17	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz)**

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
36	5180 MHz	11.68	17	<b>Complies</b>
40	5200 MHz	11.72	17	<b>Complies</b>
48	5240 MHz	11.37	17	<b>Complies</b>

**Configuration IEEE 802.11n (40MHz)**

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
38	5190 MHz	11.44	17	<b>Complies</b>
46	5230 MHz	11.26	17	<b>Complies</b>

**For Two Chain:**

**Configuration IEEE 802.11n Ant. A (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	11.46	17	Complies
40	5200 MHz	11.42	17	Complies
48	5240 MHz	11.62	17	Complies

**Configuration IEEE 802.11n Ant. B (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	11.68	17	Complies
40	5200 MHz	11.51	17	Complies
48	5240 MHz	11.65	17	Complies

**Configuration IEEE 802.11n Ant. A+B (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	14.58	17	Complies
40	5200 MHz	14.48	17	Complies
48	5240 MHz	14.65	17	Complies

**Configuration IEEE 802.11n Ant. A (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.35	17	Complies
46	5230 MHz	11.27	17	Complies

**Configuration IEEE 802.11n Ant. B (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.67	17	Complies
46	5230 MHz	11.51	17	Complies

**Configuration IEEE 802.11n Ant. A+B (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	14.52	17	Complies
46	5230 MHz	14.40	17	Complies



**3.4 Power Spectral Density Measurement**

**3.4.1 Limit**

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 3.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

**3.4.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

**3.4.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

**3.4.4 Test Setup Layout**

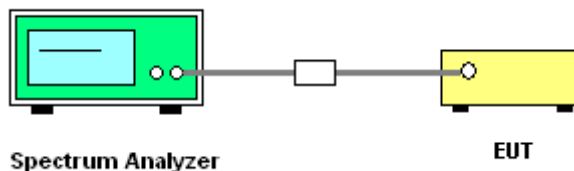

**3.4.5 Test Deviation**

There is no deviation with the original standard.

**3.4.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.4.7 Test Result of Power Spectral Density**

<b>Final Test Date</b>	Sep. 17, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	23.2°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Cain	<b>Configurations</b>	802.11a/n

**For Single Chain:  
Configuration of IEEE 802.11a**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-1.45	4	<b>Complies</b>
5200 MHz	-0.94	4	<b>Complies</b>
5240 MHz	-0.80	4	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-1.21	4	<b>Complies</b>
5200 MHz	-0.65	4	<b>Complies</b>
5240 MHz	-1.00	4	<b>Complies</b>

**Configuration IEEE 802.11n (40MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-4.28	4	<b>Complies</b>
5230 MHz	-4.12	4	<b>Complies</b>

**For Two Chain:  
Configuration IEEE 802.11n Ant. A (20MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-1.33	4	Complies
5200 MHz	-0.74	4	Complies
5240 MHz	-0.64	4	Complies

**Configuration IEEE 802.11n Ant. B (20MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	-2.14	4	Complies
5200 MHz	-1.47	4	Complies
5240 MHz	-1.67	4	Complies

**Configuration IEEE 802.11n Ant. A+B (20MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	1.29	4	Complies
5200 MHz	1.92	4	Complies
5240 MHz	1.89	4	Complies

**Configuration IEEE 802.11n Ant. A (40MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-4.11	4	Complies
5230 MHz	-4.10	4	Complies


**Configuration IEEE 802.11n Ant. B (40MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-5.44	4	Complies
5230 MHz	-4.73	4	Complies

**Configuration IEEE 802.11n Ant. A+B (40MHz)**


Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-1.71	4	Complies
5230 MHz	-1.39	4	Complies

For Single Chain:  
Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

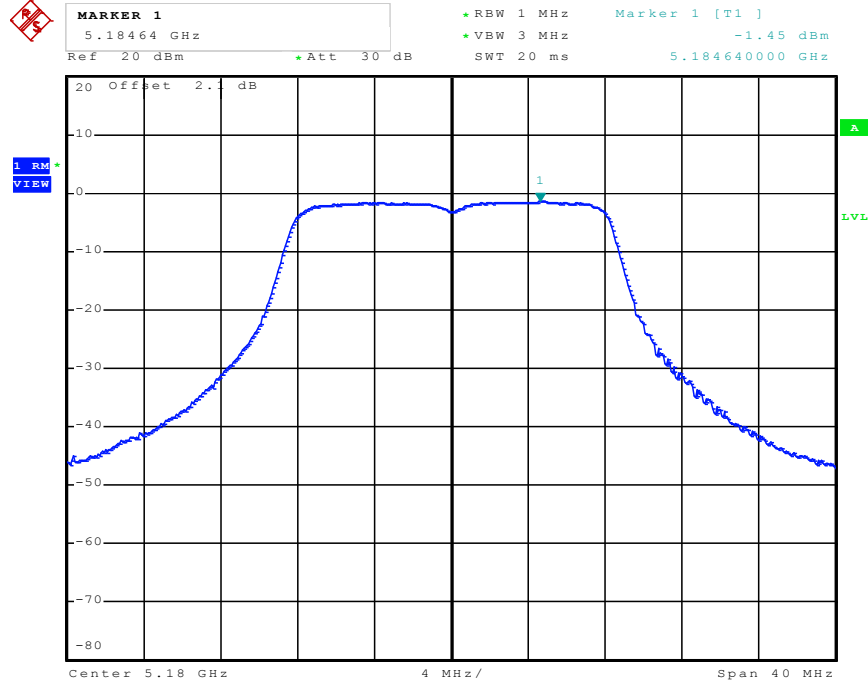


Date: 15.SEP.2011 22:38:16

Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

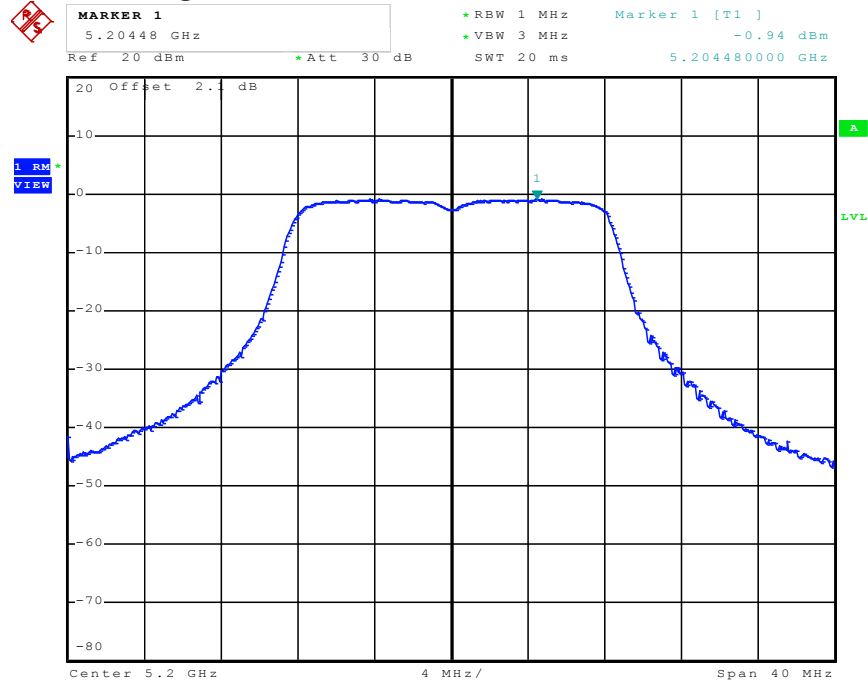


Date: 15.SEP.2011 22:38:57

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

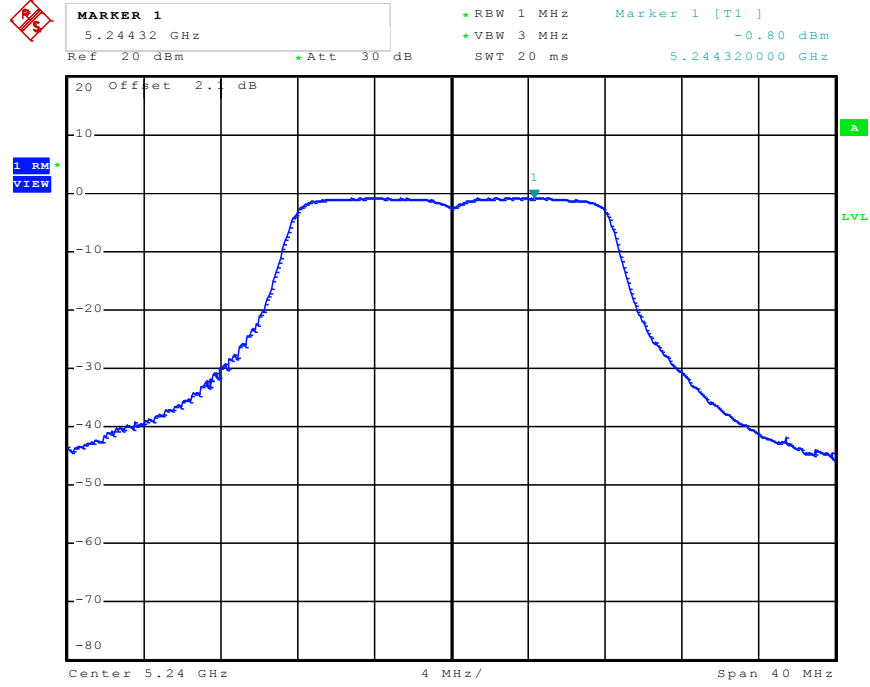


Date: 15.SEP.2011 22:56:05

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

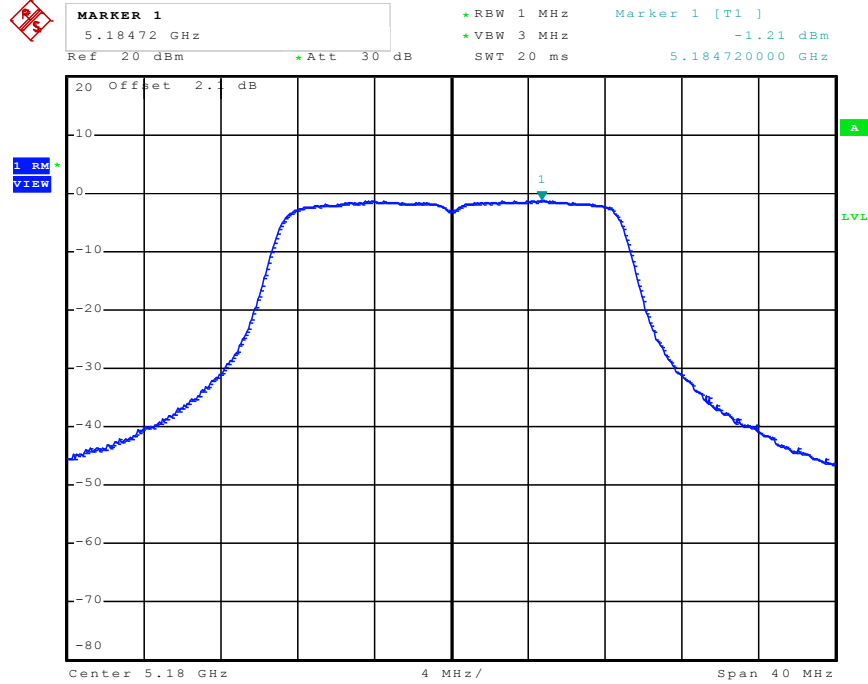


Date: 15.SEP.2011 23:45:06

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

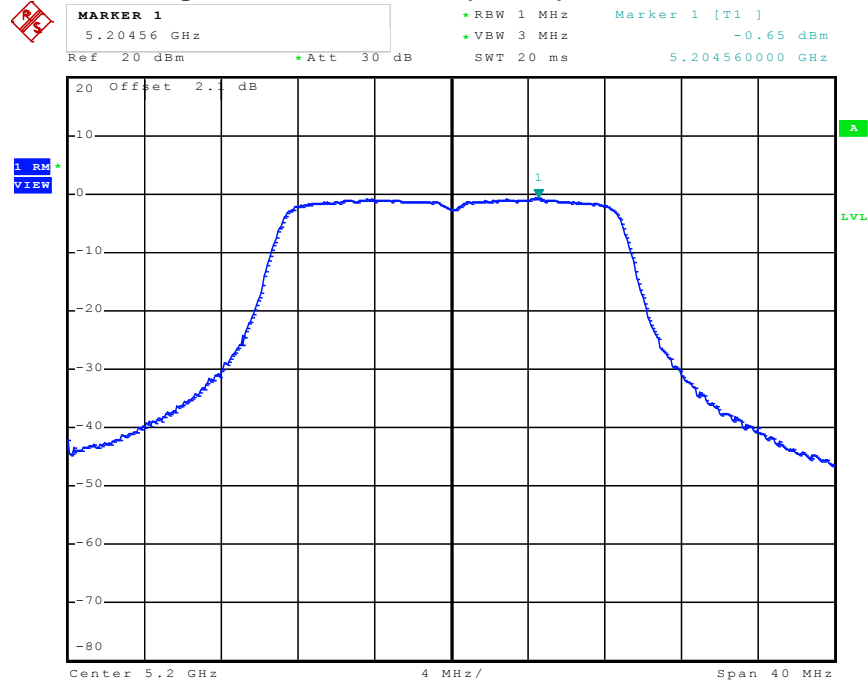


Date: 15.SEP.2011 23:45:33

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

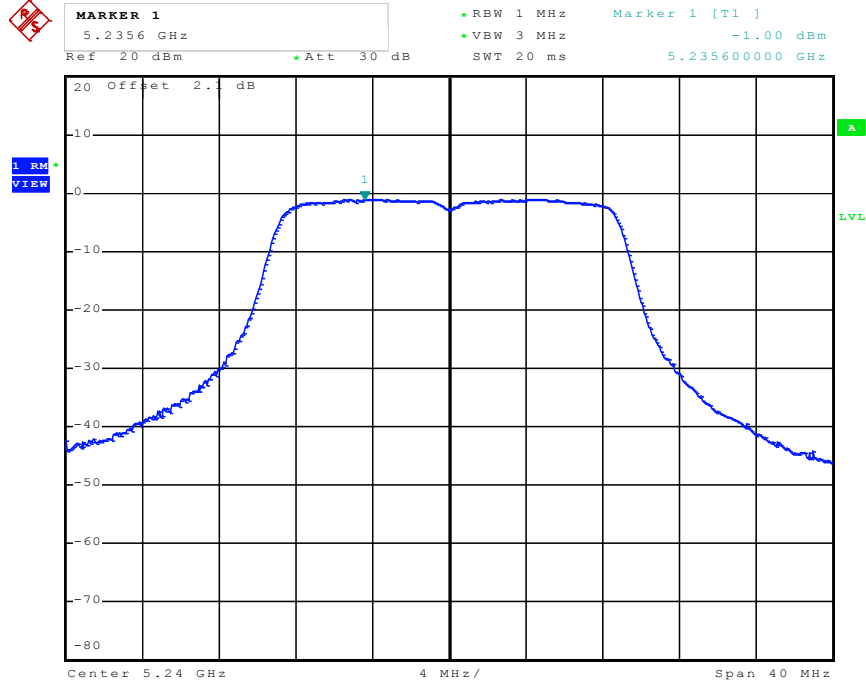


Date: 15.SEP.2011 23:58:11

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

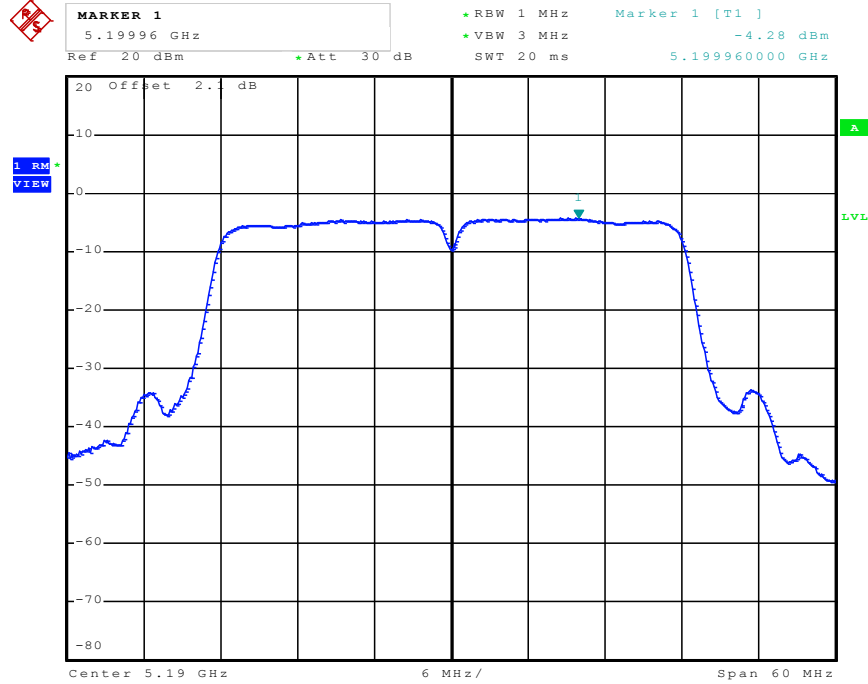

Date: 16.SEP.2011 02:33:12


Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

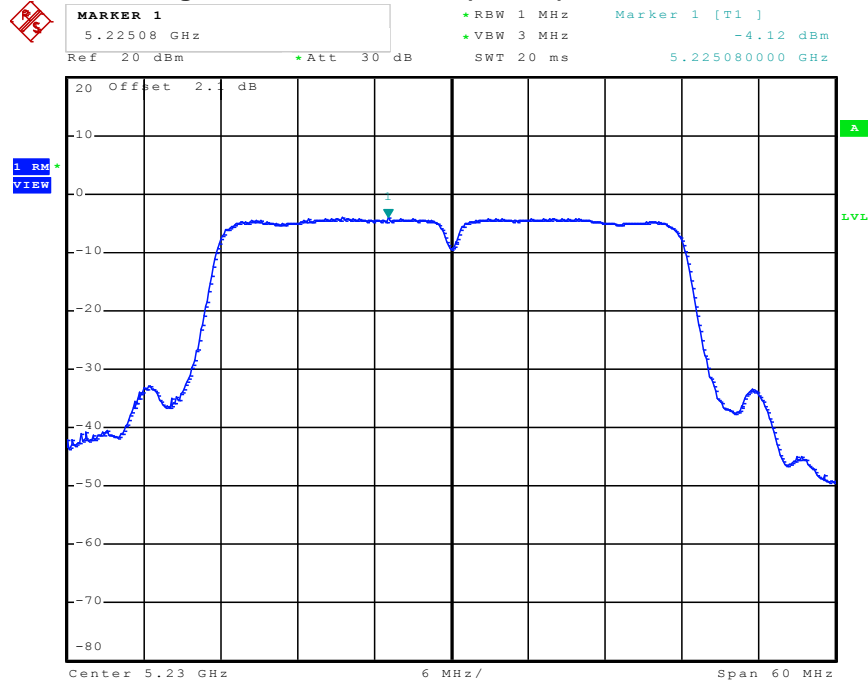

Date: 16.SEP.2011 02:33:41




For Two Chain:  
Power Density Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5180 MHz

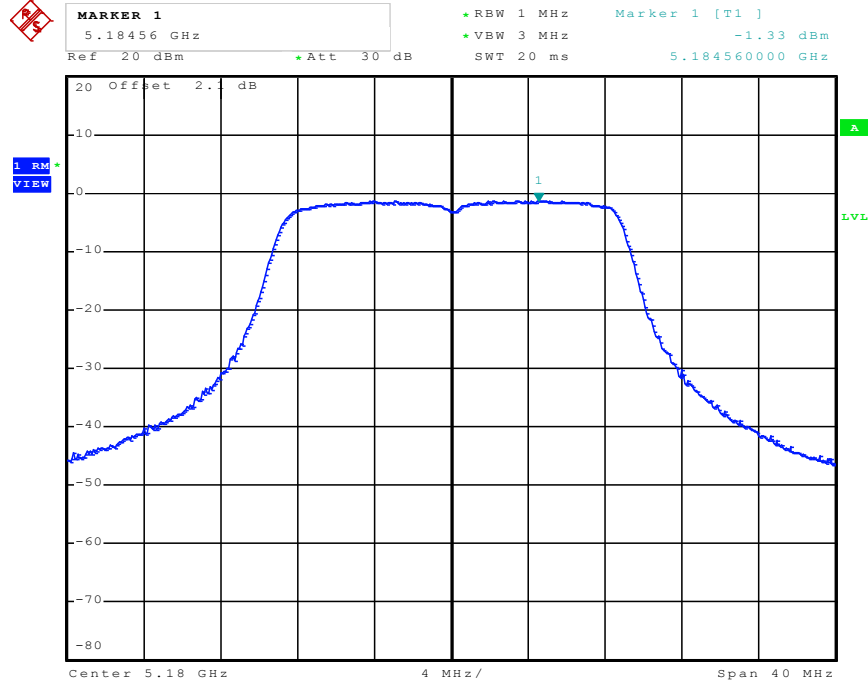


Date: 16.SEP.2011 21:47:27

Power Density Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5200 MHz

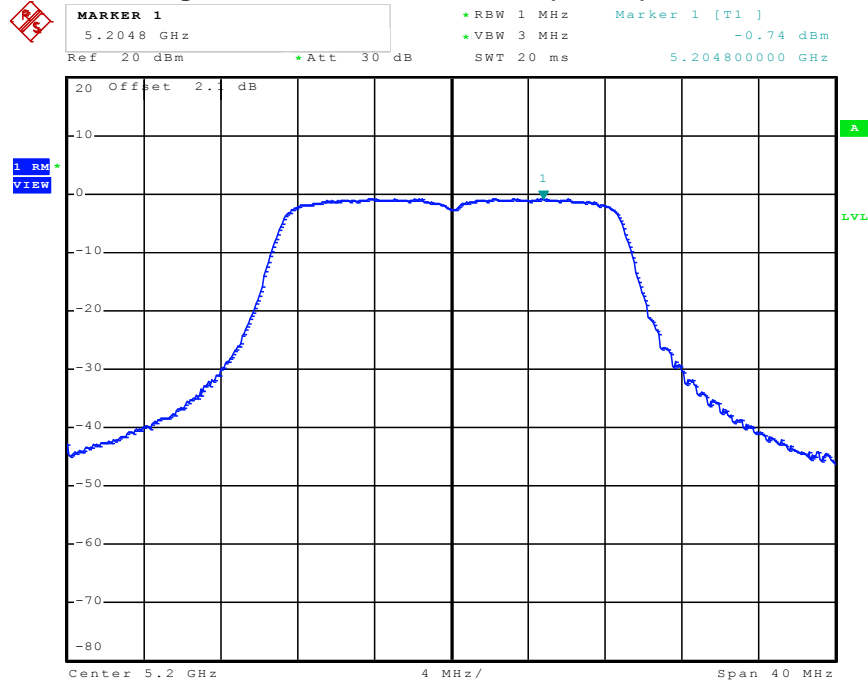


Date: 16.SEP.2011 21:47:57

Power Density Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5240 MHz

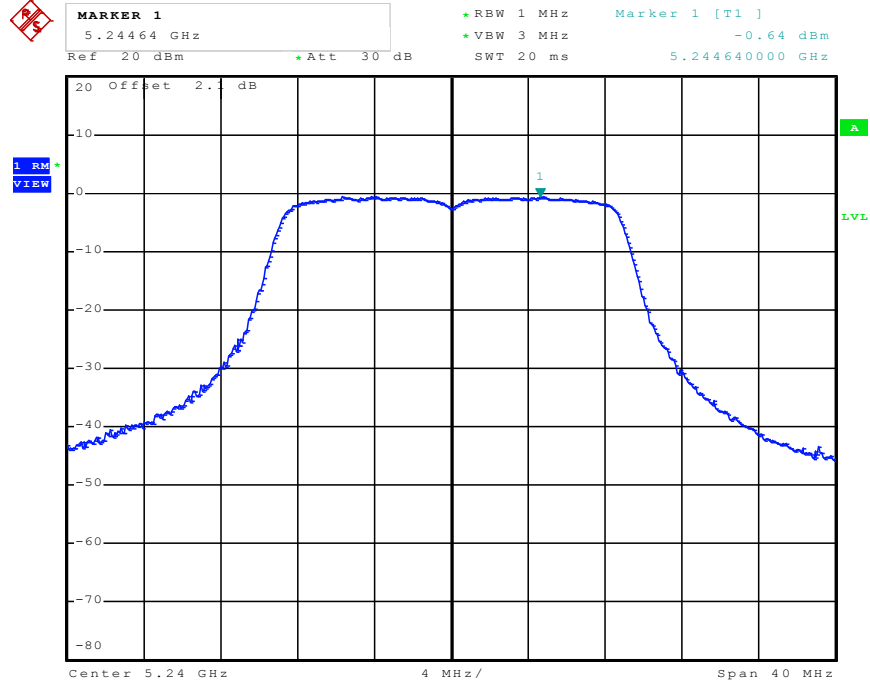


Date: 16.SEP.2011 22:12:54

Power Density Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5180 MHz

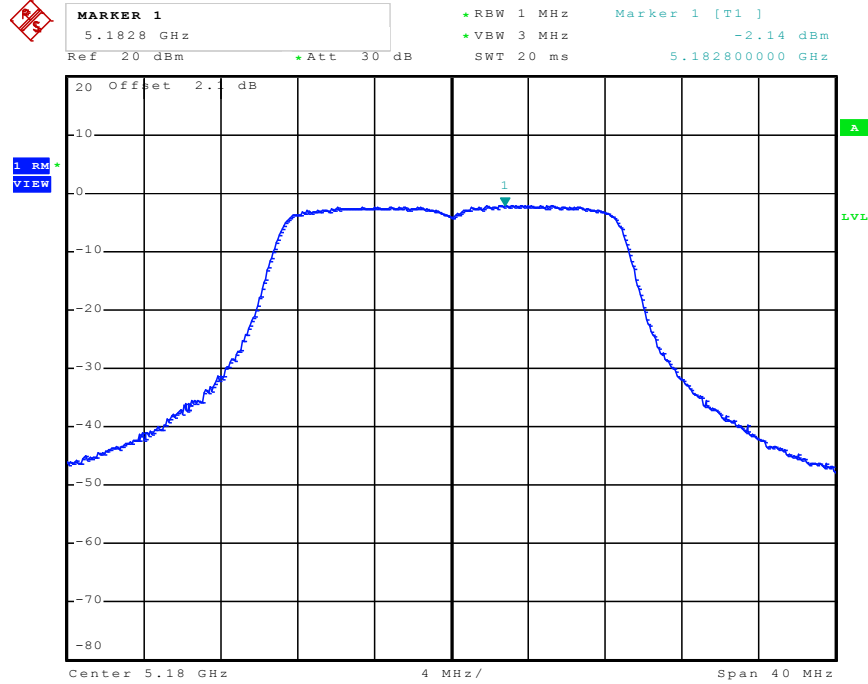


Date: 16.SEP.2011 23:15:12

Power Density Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5200 MHz

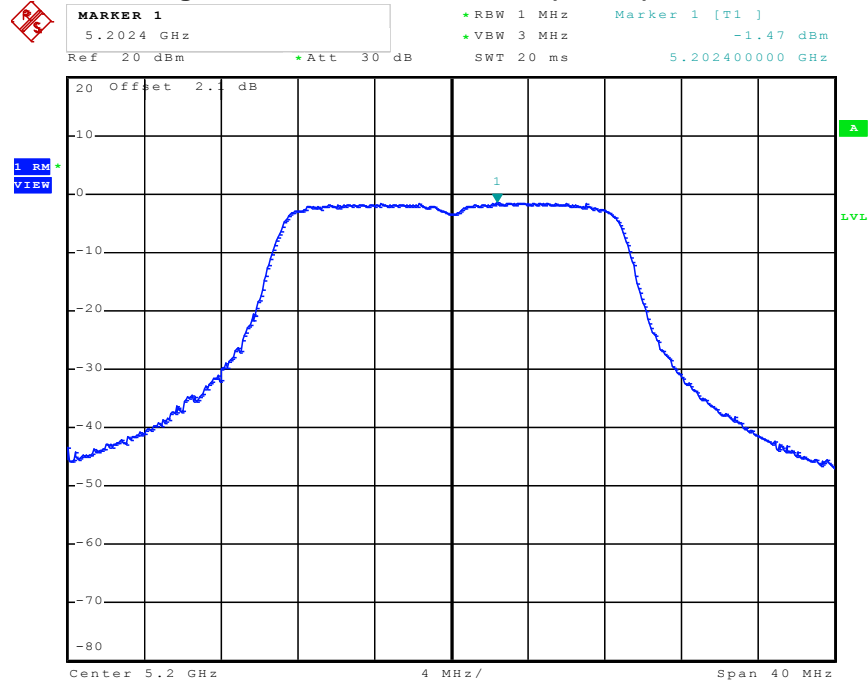


Date: 16.SEP.2011 23:15:34

Power Density Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5240 MHz

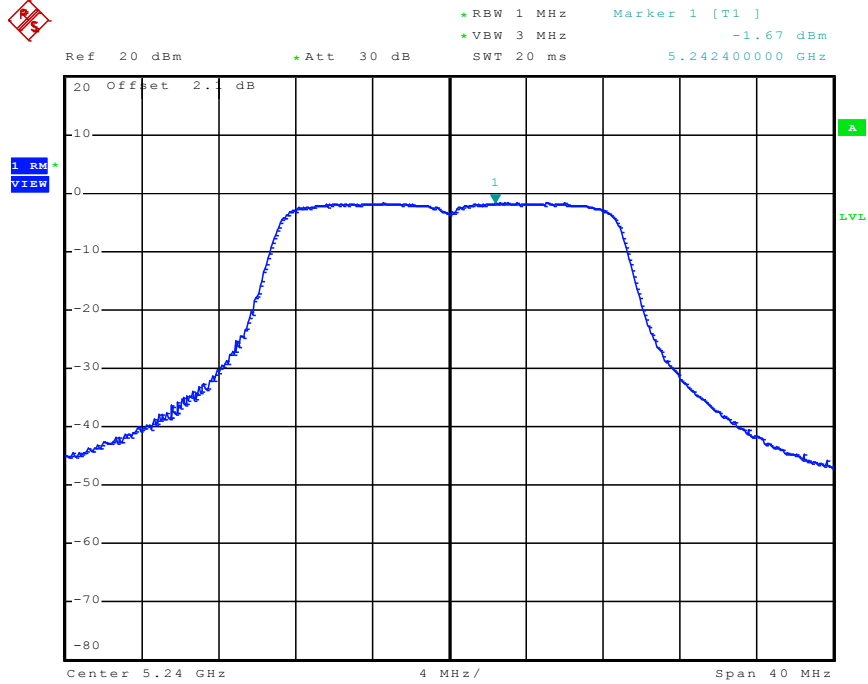


Date: 16.SEP.2011 23:26:30

Power Density Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5190 MHz

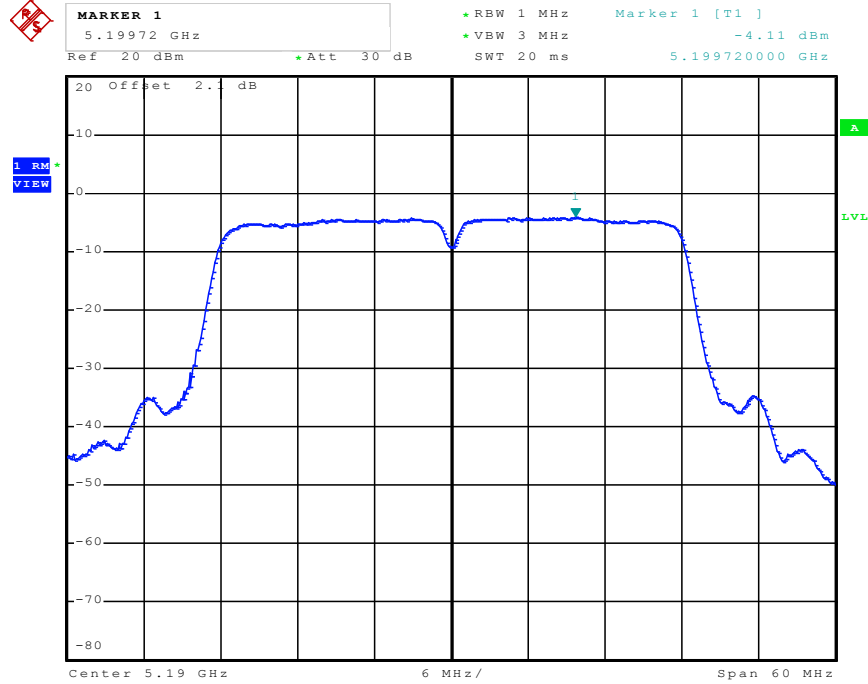


Date: 16.SEP.2011 22:58:41

Power Density Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5230 MHz

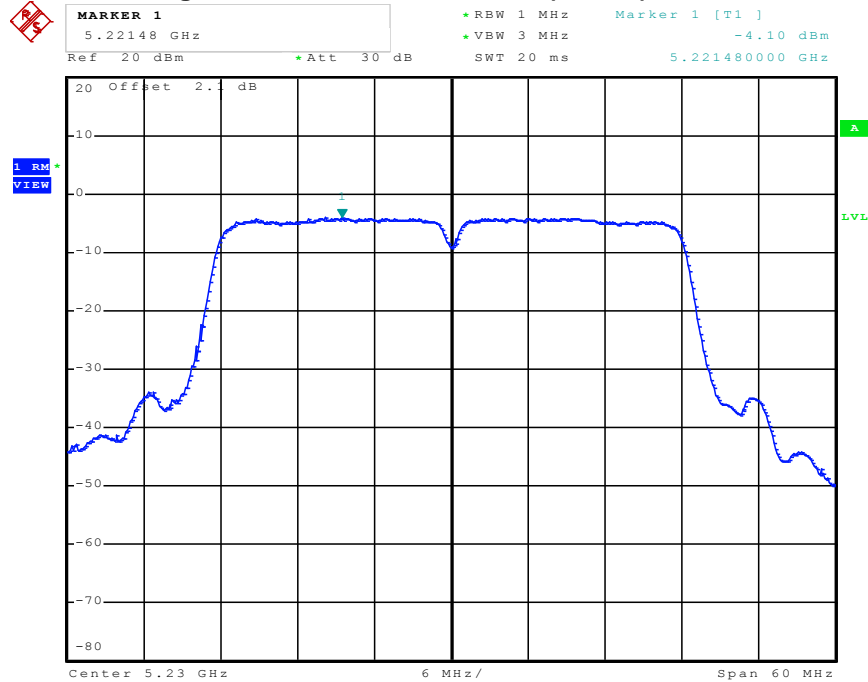


Date: 16.SEP.2011 22:59:23

Power Density Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5190 MHz

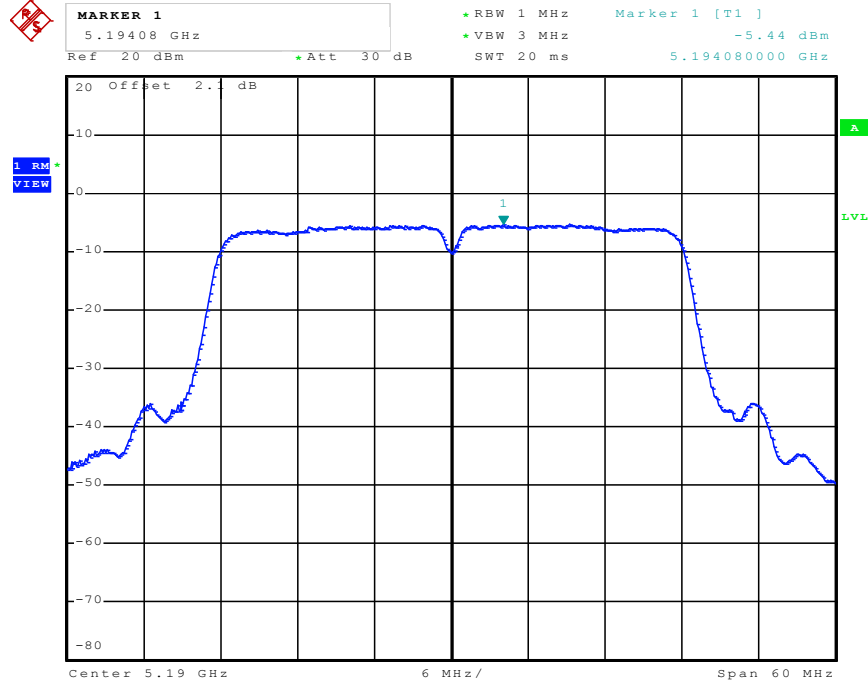

Date: 17.SEP.2011 00:08:09

Power Density Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5230 MHz

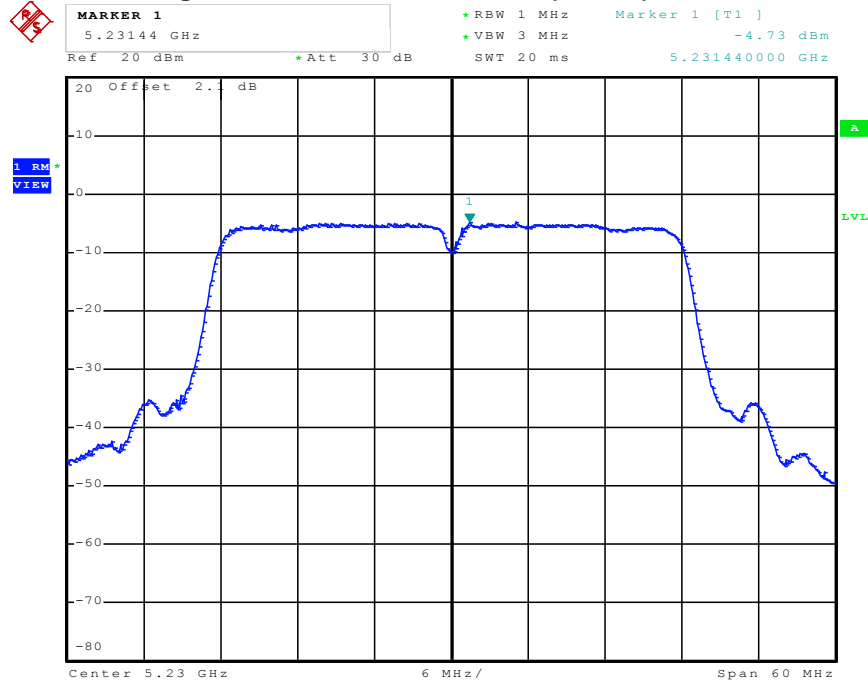

Date: 17.SEP.2011 00:08:32

**3.5 Peak Excursion Measurement**

**3.5.1 Limit**

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

**3.5.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

**3.5.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be  $\leq 13$  dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW  $\geq 3$  MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW  $\geq 1/T$  (IEEE 802.11a VBW = 300kHz  $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum)  $< 0.5$  RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner. (Only for IEEE 802.11n test)

**3.5.4 Test Setup Layout**

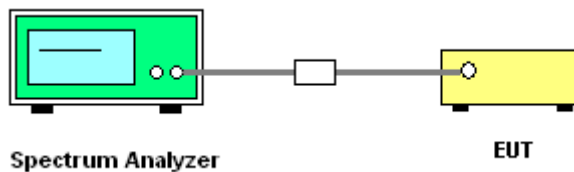

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Test Result of Peak Excursion**

<b>Final Test Date</b>	Sep. 17, 2011	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	23.2°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Cain	<b>Configurations</b>	802.11a/n

**For Single Chain:  
Configuration of IEEE 802.11a**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	4.99	13	<b>Complies</b>
5200 MHz	5.03	13	<b>Complies</b>
5240 MHz	5.02	13	<b>Complies</b>

**Configuration IEEE 802.11n (20MHz)**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	5.02	13	<b>Complies</b>
5200 MHz	5.13	13	<b>Complies</b>
5240 MHz	5.19	13	<b>Complies</b>

**Configuration IEEE 802.11n (40MHz)**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	5.74	13	<b>Complies</b>
5230 MHz	5.54	13	<b>Complies</b>



**For Two Chain:  
Configuration IEEE 802.11n Ant. A (20MHz)**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	4.95	13	Complies
5200 MHz	4.92	13	Complies
5240 MHz	4.95	13	Complies

**Configuration IEEE 802.11n Ant. B (20MHz)**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	6.81	13	Complies
5200 MHz	6.82	13	Complies
5240 MHz	6.81	13	Complies


**Configuration IEEE 802.11n Ant. A (40MHz)**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	5.90	13	Complies
5230 MHz	6.00	13	Complies

**Configuration IEEE 802.11n Ant. B (40MHz)**


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	6.85	13	Complies
5230 MHz	6.81	13	Complies

For Single Chain:  
Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

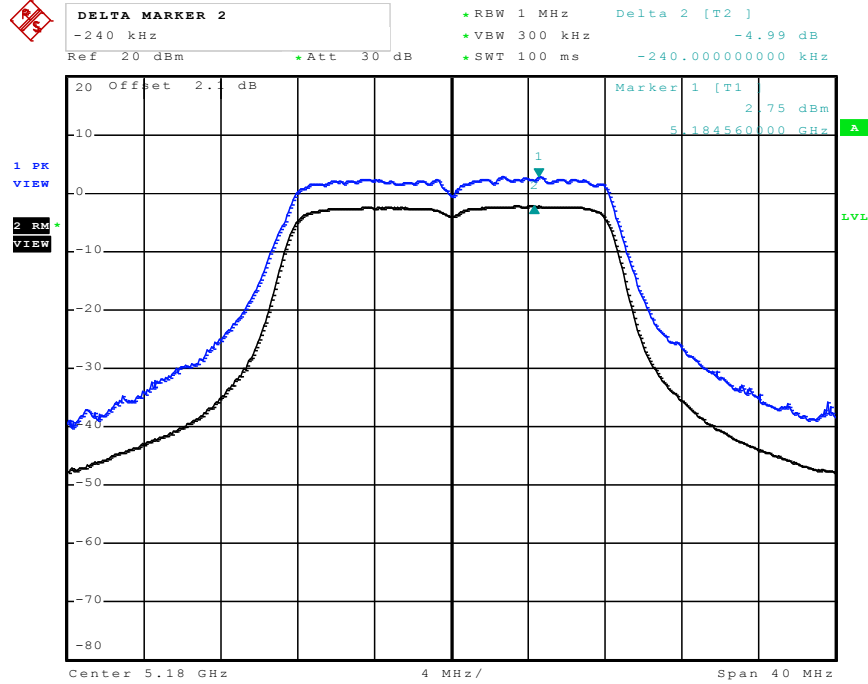


Date: 15.SEP.2011 22:31:19

Peak Excursion Plot on Configuration IEEE 802.11a / 5200 MHz

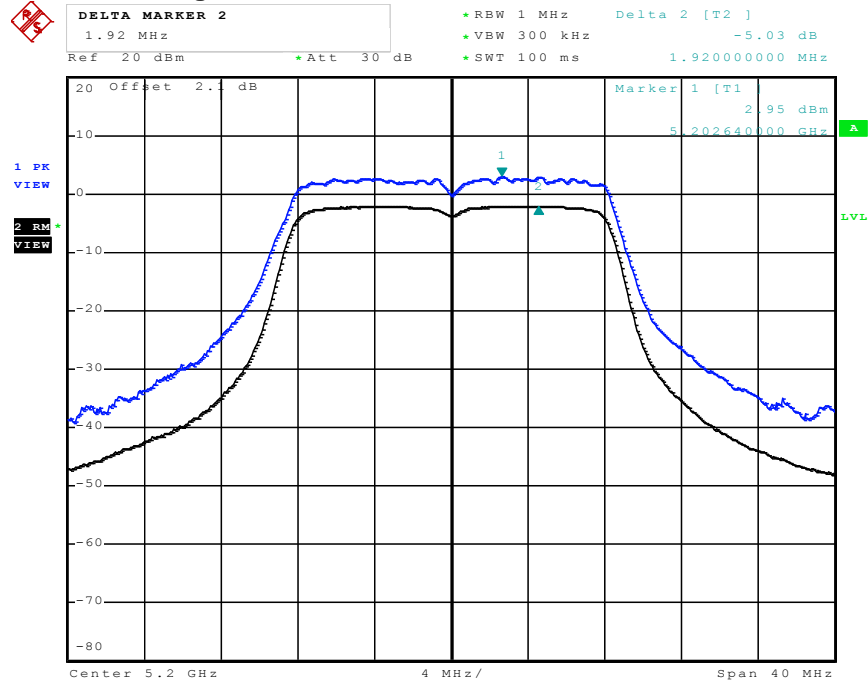


Date: 15.SEP.2011 22:44:40

Peak Excursion Plot on Configuration IEEE 802.11a / 5240 MHz

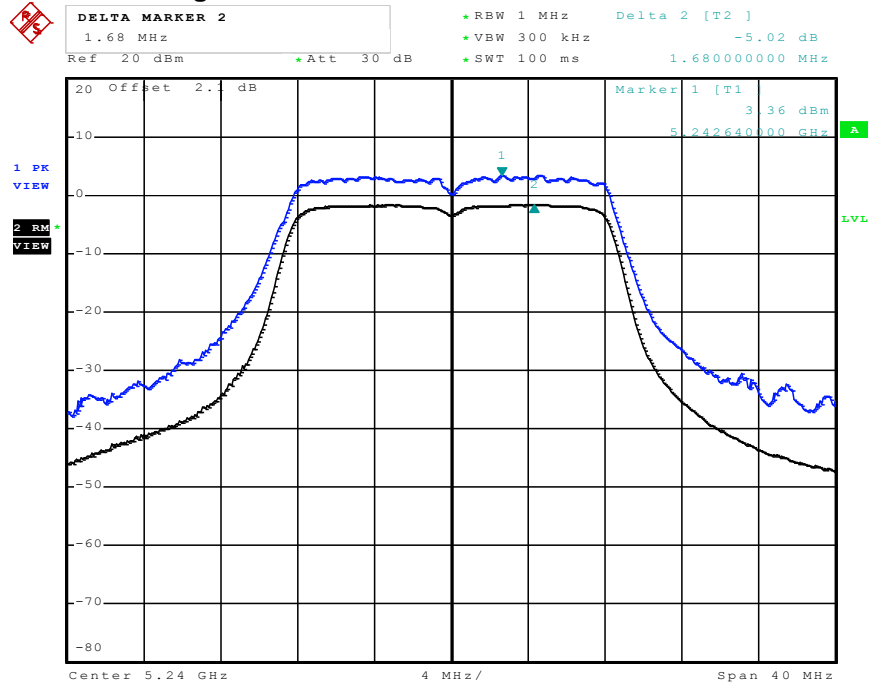


Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

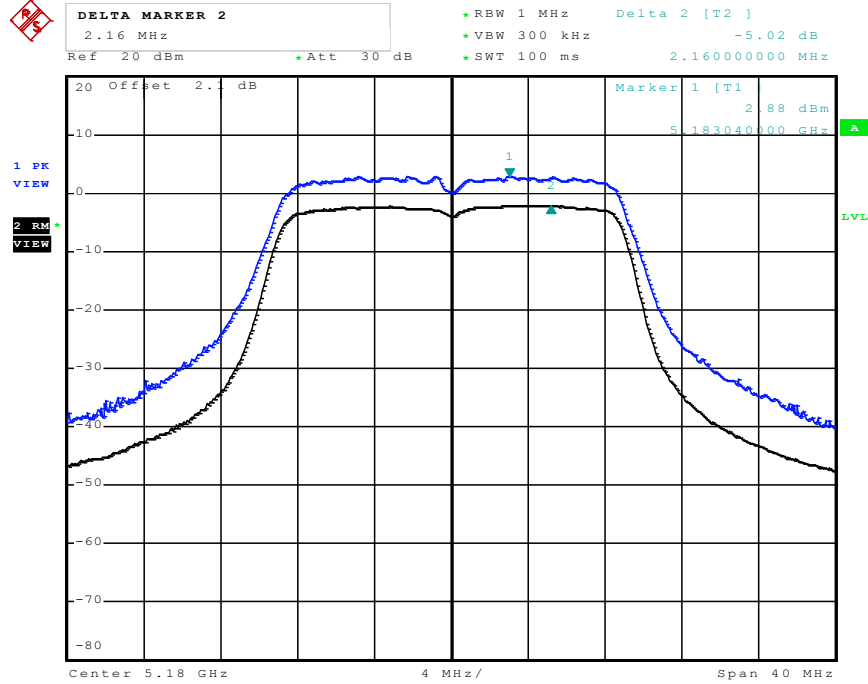


Date: 15.SEP.2011 23:32:51

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

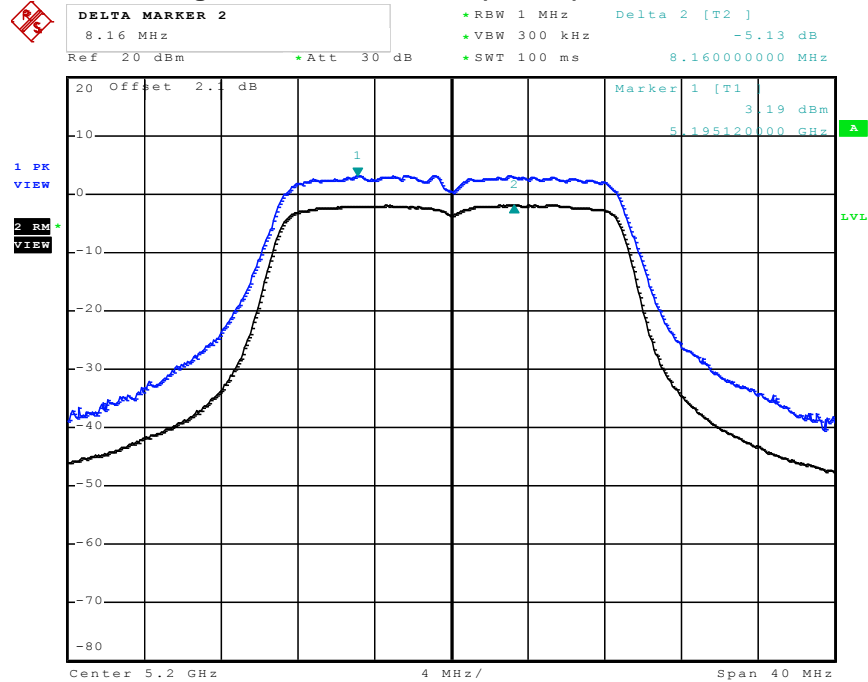


Date: 15.SEP.2011 23:51:05

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

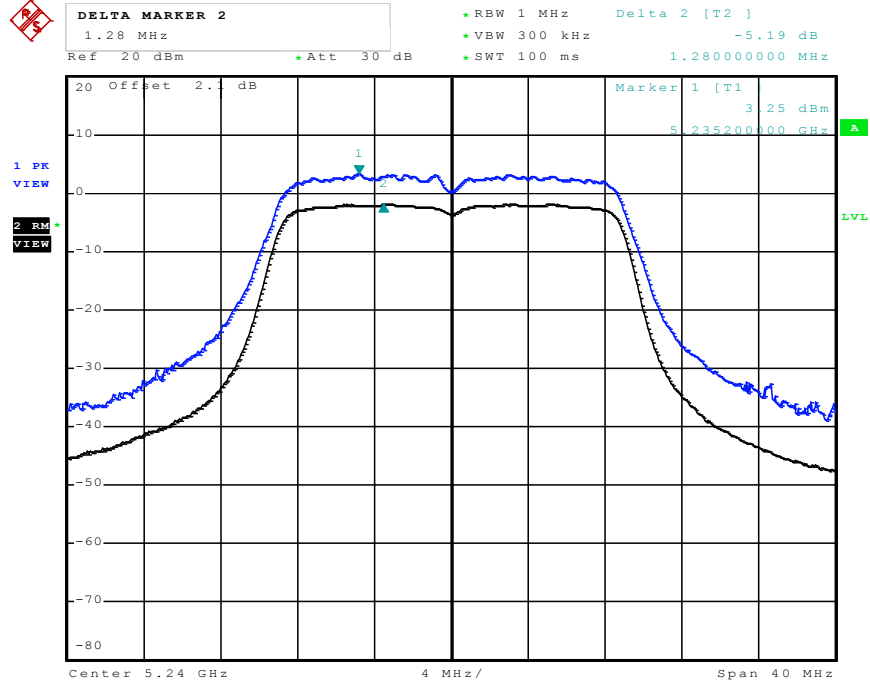


Date: 15.SEP.2011 23:53:26

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

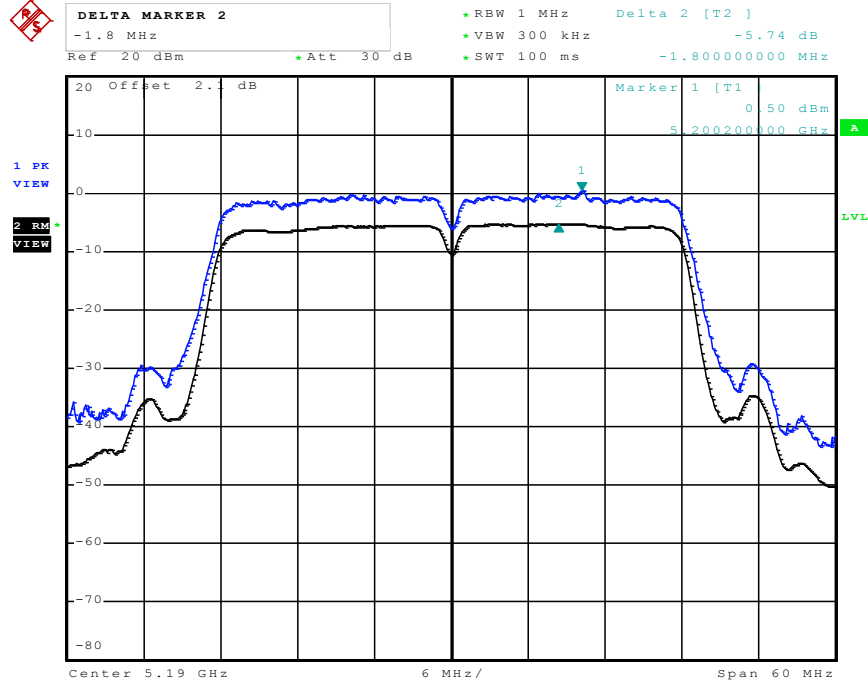


Date: 16.SEP.2011 02:28:47

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

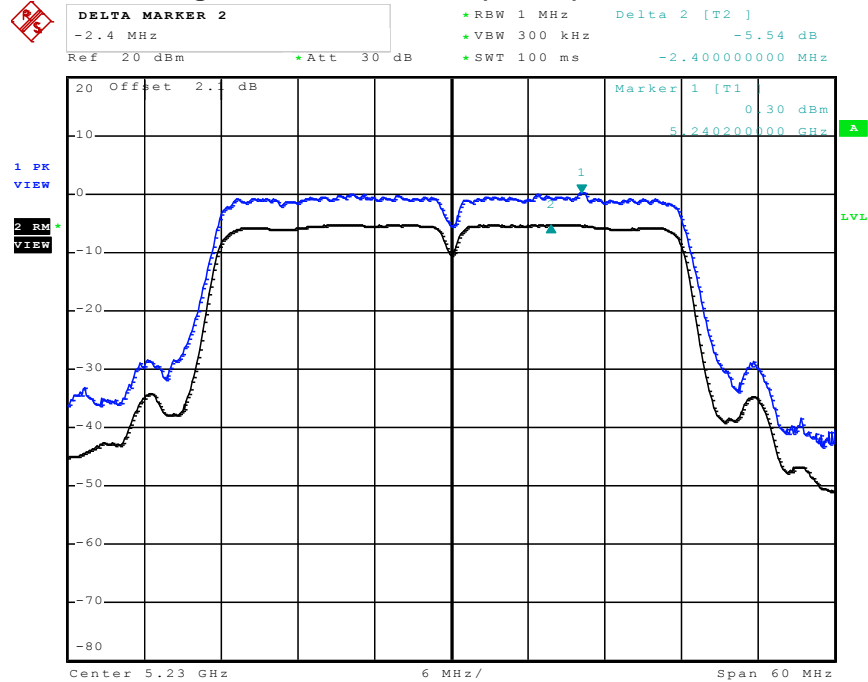


Date: 16.SEP.2011 02:41:17

For Two Chain:  
Peak Excursion Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5180 MHz

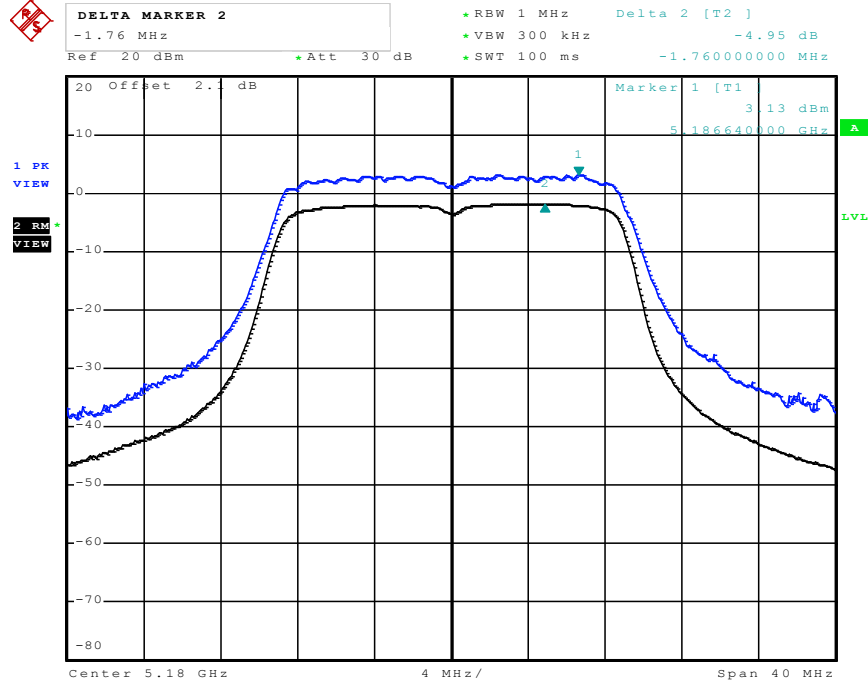


Date: 16.SEP.2011 21:37:30

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5200 MHz

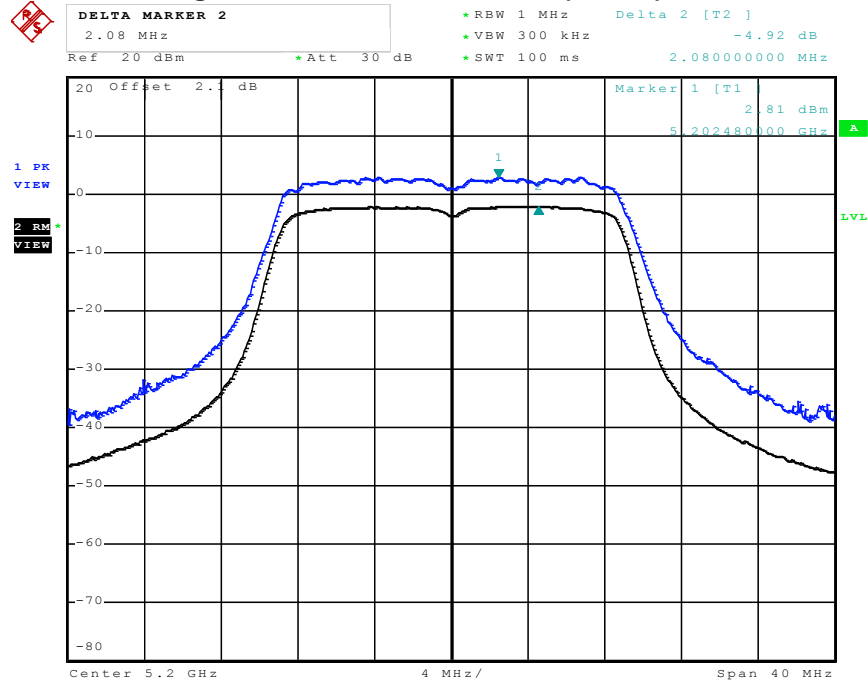

Date: 16.SEP.2011 21:55:56


Peak Excursion Plot on Configuration IEEE 802.11n Ant. A (20MHz) / 5240 MHz

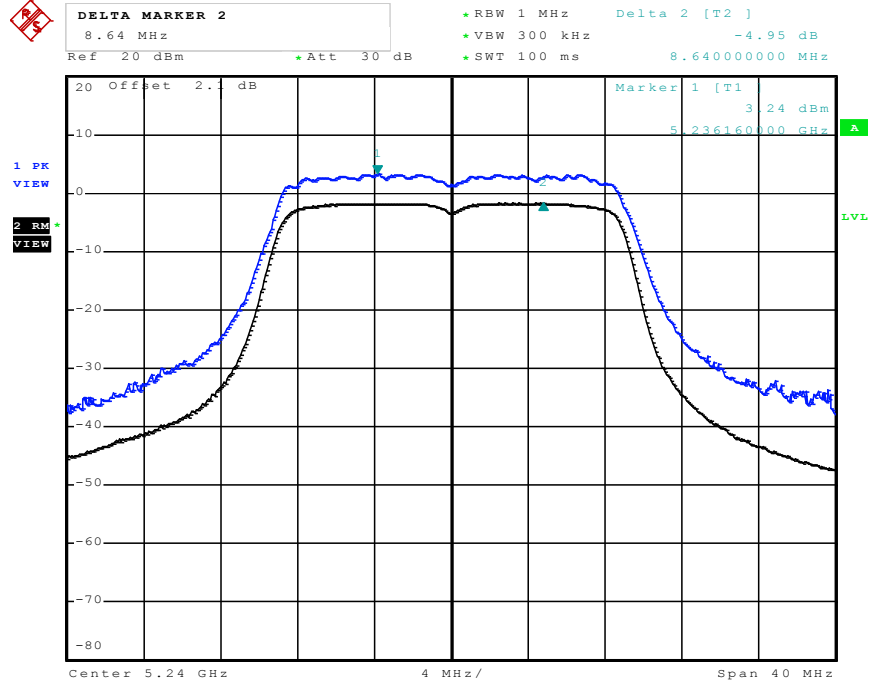

Date: 16.SEP.2011 22:01:08




Peak Excursion Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5180 MHz

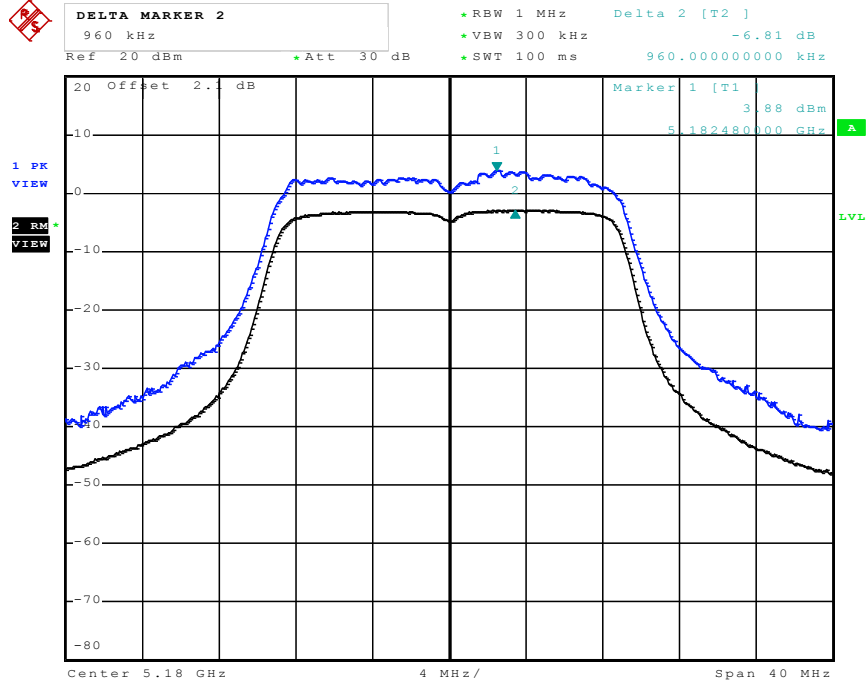


Date: 16.SEP.2011 23:11:00

Peak Excursion Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5200 MHz

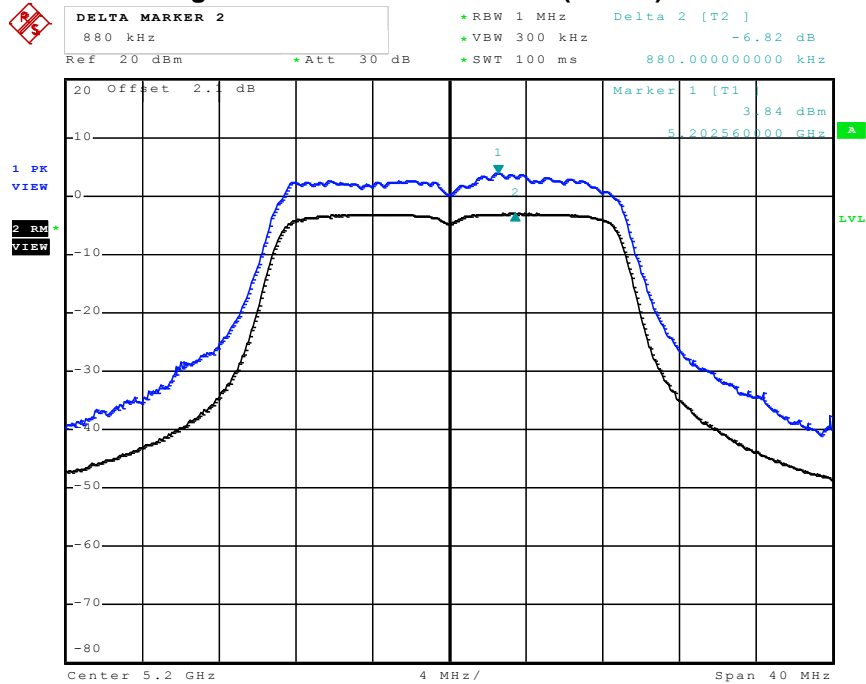


Date: 16.SEP.2011 23:19:49

Peak Excursion Plot on Configuration IEEE 802.11n Ant. B (20MHz) / 5240 MHz

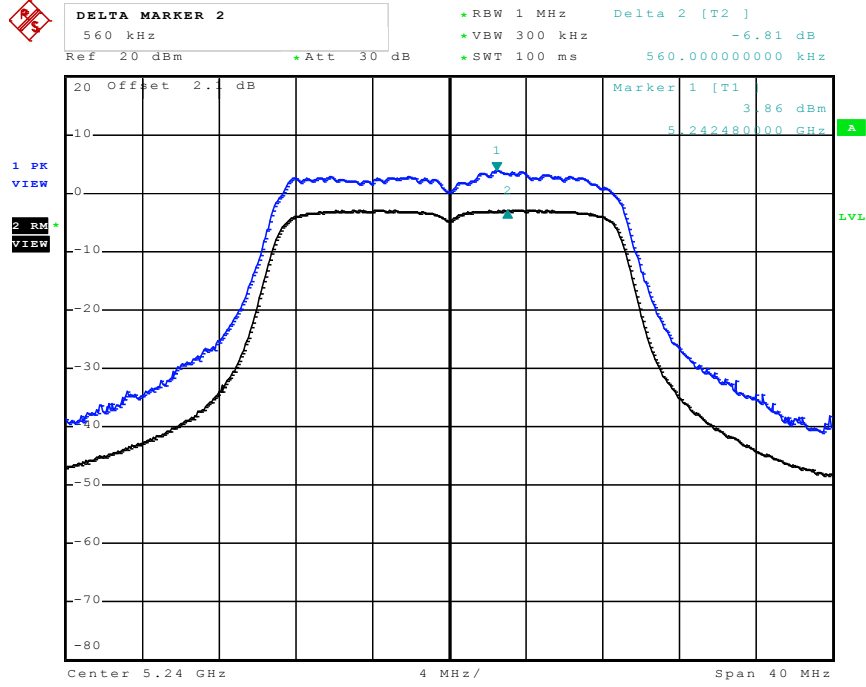


Date: 16.SEP.2011 23:22:11

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5190 MHz

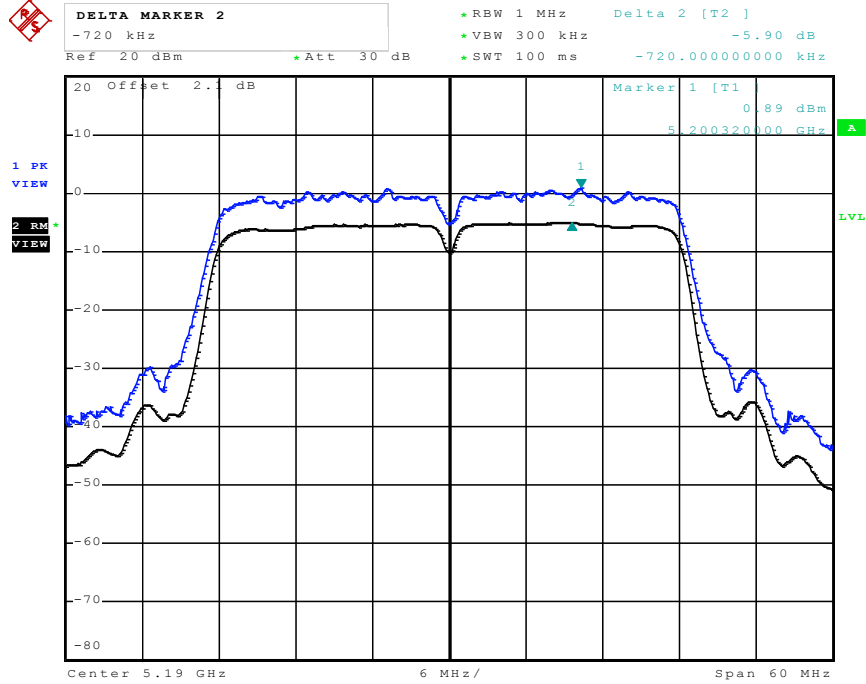


Date: 16.SEP.2011 22:53:46

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A (40MHz) / 5230 MHz

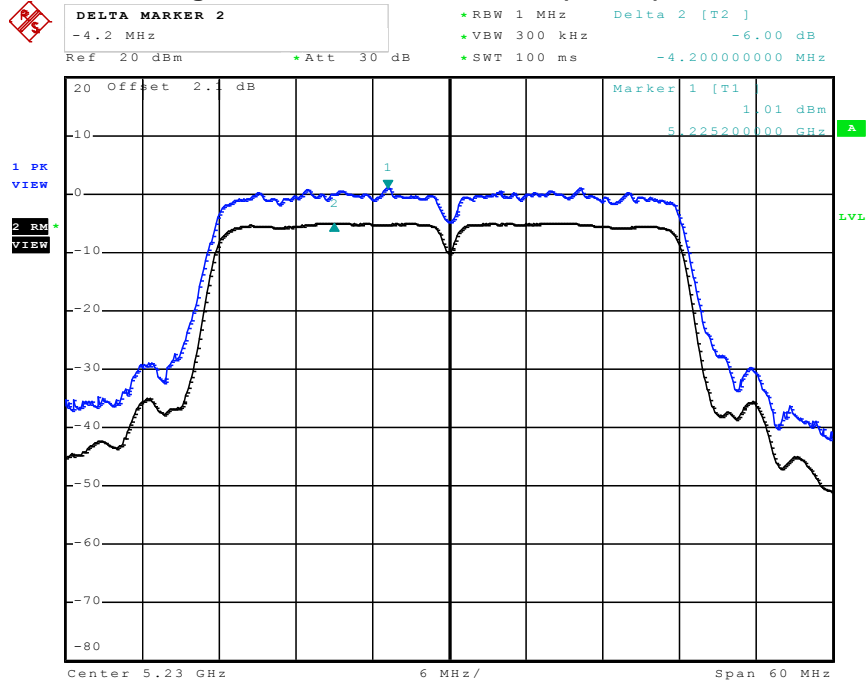


Date: 16.SEP.2011 23:02:44

Peak Excursion Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5190 MHz

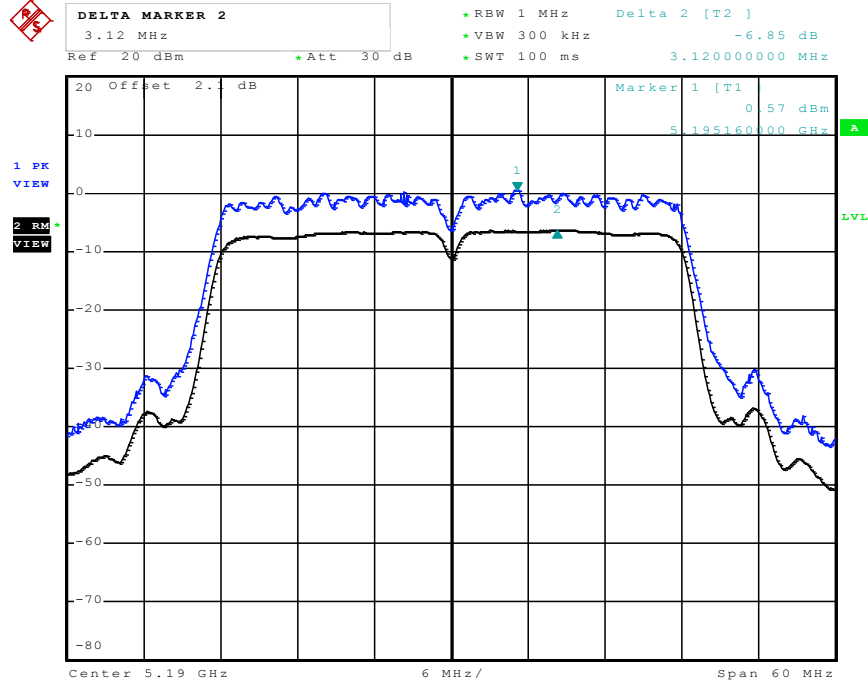

Date: 17.SEP.2011 00:05:54

Peak Excursion Plot on Configuration IEEE 802.11n Ant. B (40MHz) / 5230 MHz

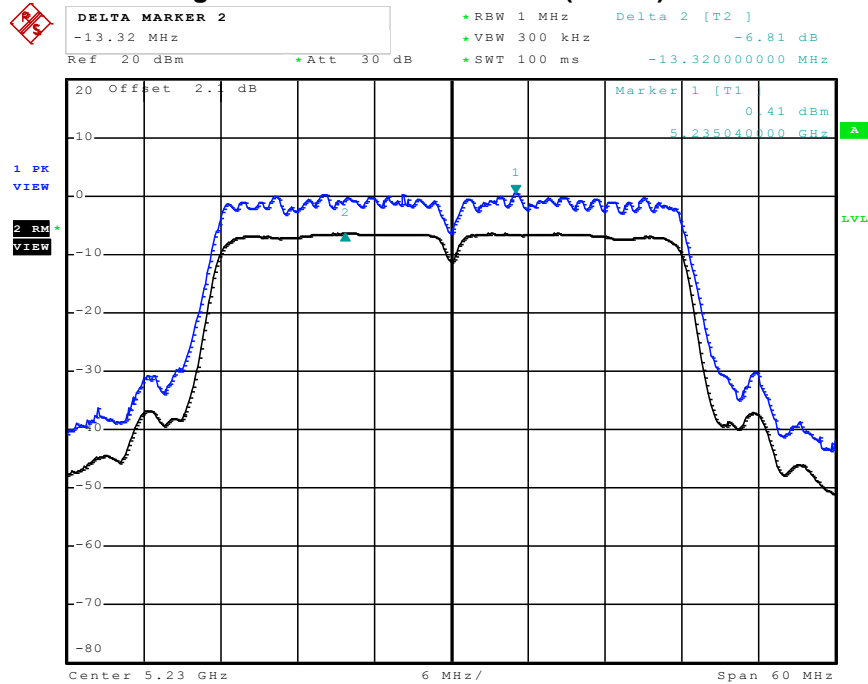

Date: 17.SEP.2011 00:11:58

**3.6 Radiated Emissions Measurement**

**3.6.1 Limit**

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.6.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz z for peak


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.6.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

**3.6.4 Test Setup Layout**

For radiated emissions below 30MHz

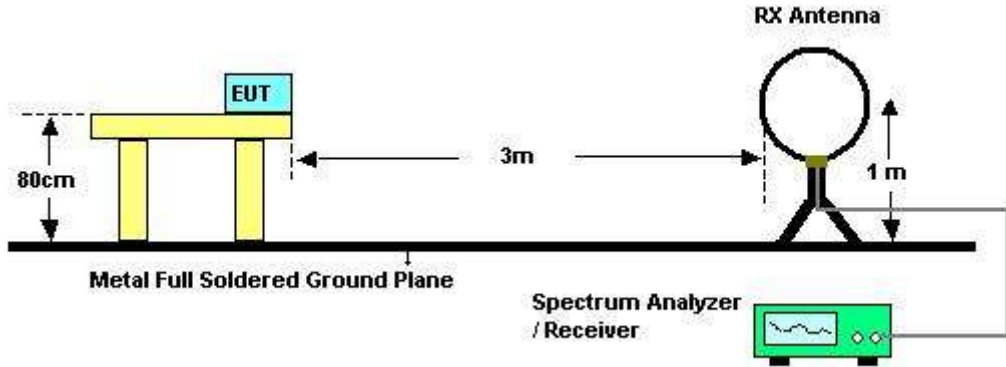

For radiated emissions above 30MHz

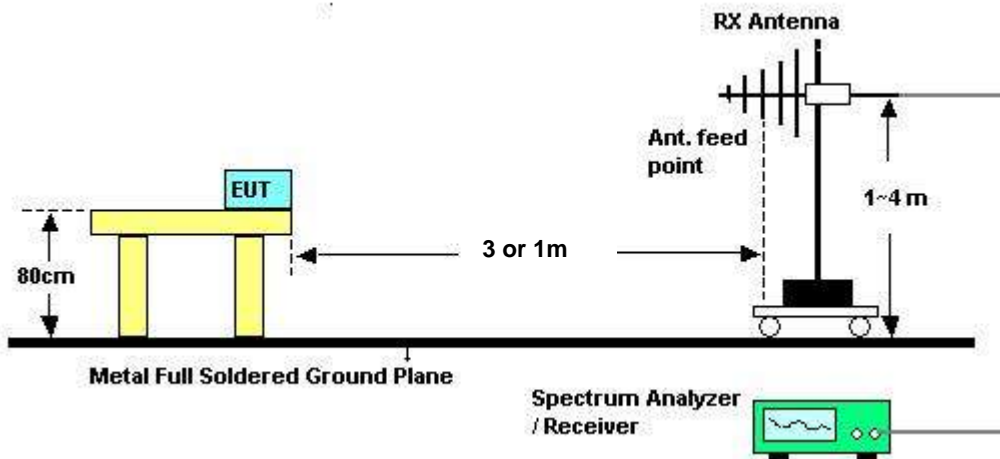

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

**3.6.5 Test Deviation**

There is no deviation with the original standard.

**3.6.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.6.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Final Test Date</b>	Sep. 24, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



3.6.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	Sep. 24, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	Mode 1

Horizontal

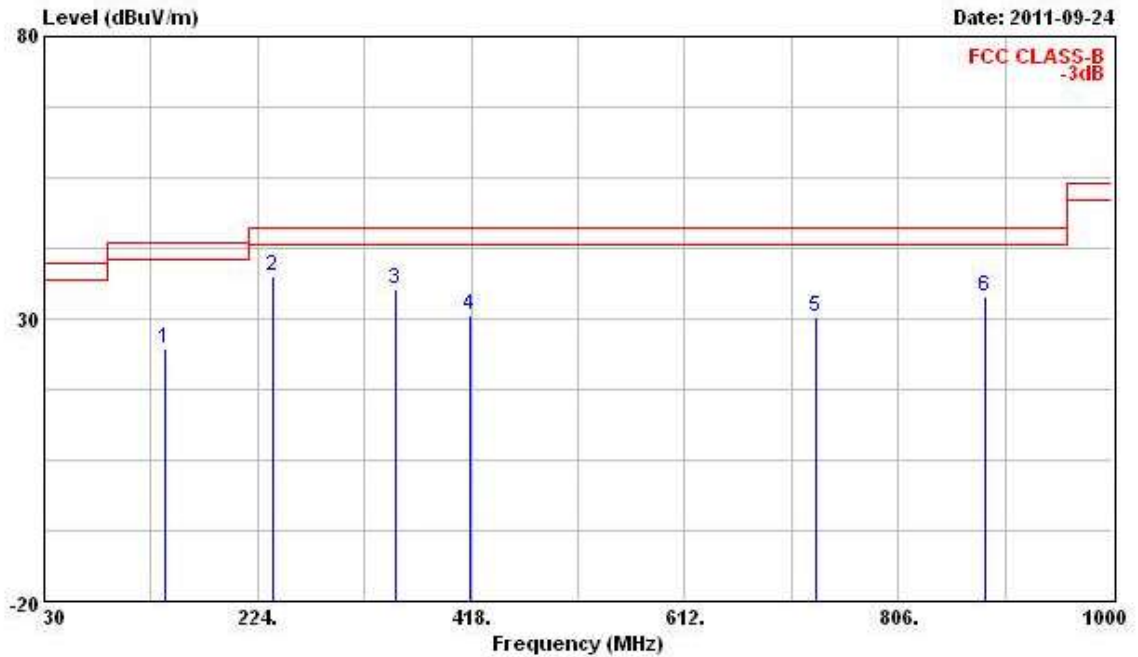

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	140.580	24.74	-18.76	43.50	40.04	11.36	1.05	27.70	Peak	---	---
2	238.550	37.72	-8.28	46.00	52.76	11.44	1.52	28.00	Peak	---	---
3	350.100	35.29	-10.71	46.00	46.52	14.99	2.23	28.46	Peak	---	---
4	417.030	30.64	-15.36	46.00	39.67	17.16	2.56	28.75	Peak	---	---
5	731.310	30.23	-15.77	46.00	35.23	20.43	3.95	29.38	Peak	---	---
6	885.540	34.10	-11.90	46.00	37.69	20.98	4.81	29.38	Peak	---	---

Vertical

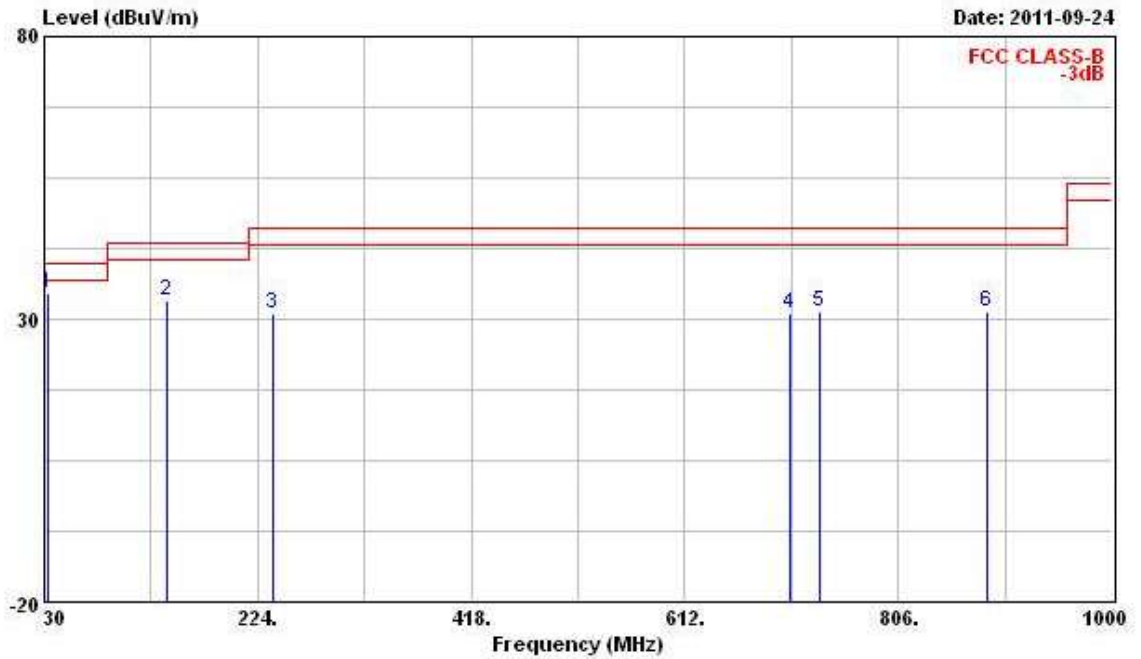

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	32.910	34.72	-5.28	40.00	46.27	16.71	-0.82	27.44	Peak	---	---
2	141.550	33.35	-10.15	43.50	48.75	11.26	1.05	27.71	Peak	---	---
3	238.550	31.07	-14.93	46.00	46.11	11.44	1.52	28.00	Peak	---	---
4	708.030	30.95	-15.05	46.00	36.30	20.09	3.87	29.31	Peak	---	---
5	734.220	31.38	-14.62	46.00	36.33	20.47	3.96	29.39	Peak	---	---
6	886.510	31.39	-14.61	46.00	34.98	20.98	4.81	29.38	Peak	---	---

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Final Test Date	Sep. 24, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	Mode 2

Horizontal

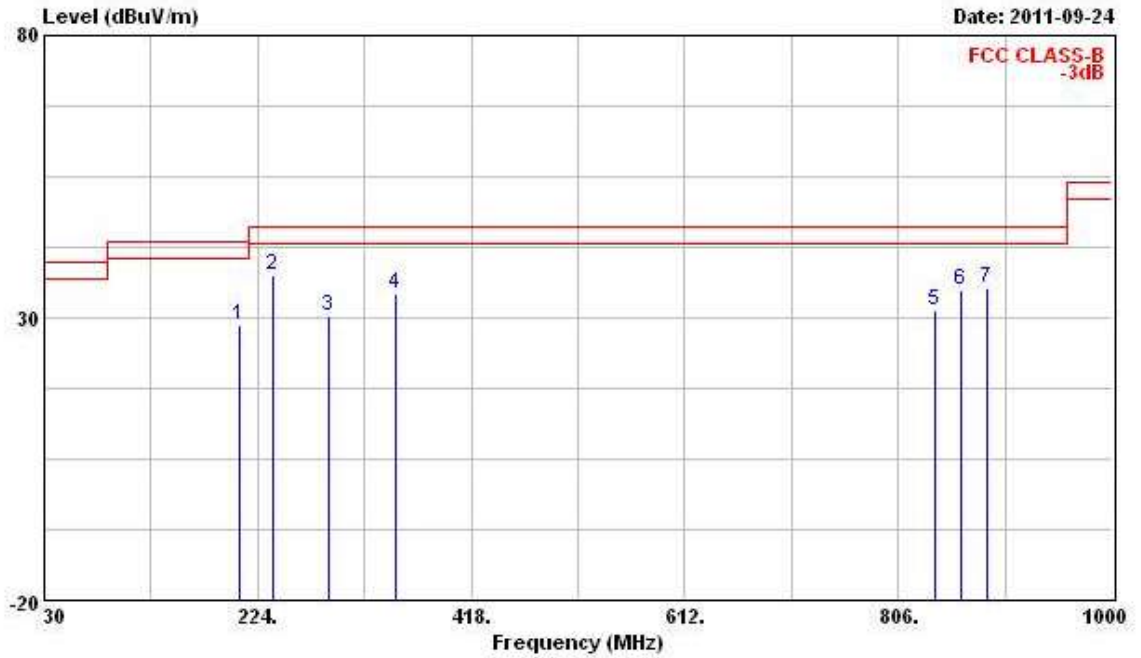

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	207.510	28.83	-14.67	43.50	46.05	9.46	1.31	27.99	Peak	---	---
2	238.550	37.51	-8.49	46.00	52.55	11.44	1.52	28.00	Peak	---	---
3	288.020	30.39	-15.61	46.00	43.42	13.37	1.82	28.22	Peak	---	---
4	350.100	34.30	-11.70	46.00	45.53	14.99	2.23	28.46	Peak	---	---
5	839.950	31.28	-14.72	46.00	35.33	20.82	4.58	29.45	Peak	---	---
6	863.230	34.86	-11.14	46.00	38.70	20.89	4.69	29.42	Peak	---	---
7	886.510	35.18	-10.82	46.00	38.77	20.98	4.81	29.38	Peak	---	---

Vertical

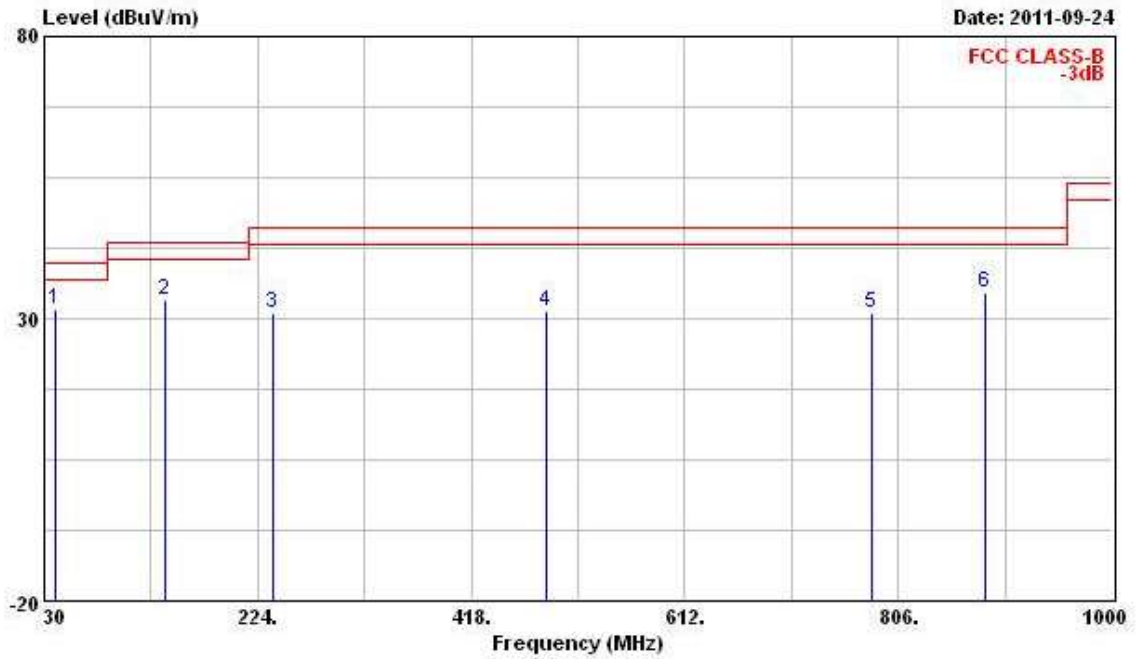

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	40.670	31.75	-8.25	40.00	47.75	12.17	-0.69	27.47	Peak	---	---
2	140.580	33.32	-10.18	43.50	48.62	11.36	1.05	27.70	Peak	---	---
3	238.550	31.07	-14.93	46.00	46.11	11.44	1.52	28.00	Peak	---	---
4	486.870	31.29	-14.71	46.00	39.55	17.99	2.68	28.93	Peak	---	---
5	781.750	31.05	-14.95	46.00	35.50	20.74	4.27	29.45	Peak	---	---
6	885.540	34.46	-11.54	46.00	38.05	20.98	4.81	29.38	Peak	---	---

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


<b>Final Test Date</b>	Sep. 24, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	Mode 3

**Horizontal**

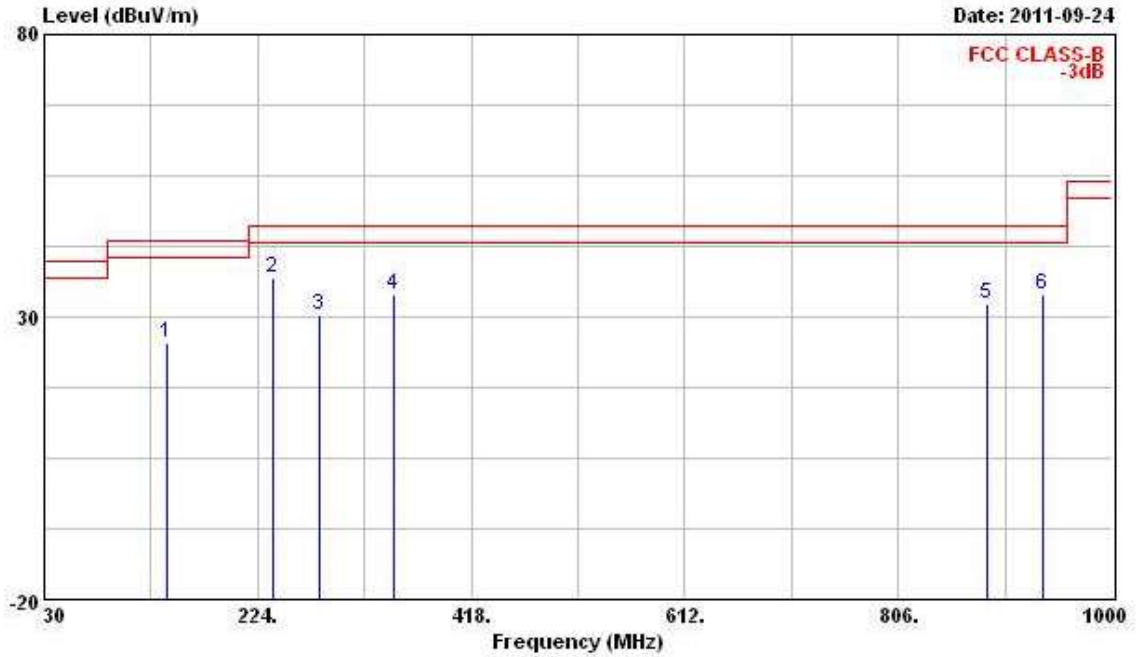

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	141.550	25.30	-18.20	43.50	40.70	11.26	1.05	27.71	Peak	---	---
2	238.550	36.90	-9.10	46.00	51.94	11.44	1.52	28.00	Peak	---	---
3	280.260	30.47	-15.53	46.00	43.64	13.23	1.77	28.17	Peak	---	---
4	347.190	33.81	-12.19	46.00	45.13	14.92	2.21	28.45	Peak	---	---
5	886.510	32.42	-13.58	46.00	36.01	20.98	4.81	29.38	Peak	---	---
6	936.950	34.10	-11.90	46.00	36.84	21.25	5.23	29.23	Peak	---	---

Vertical

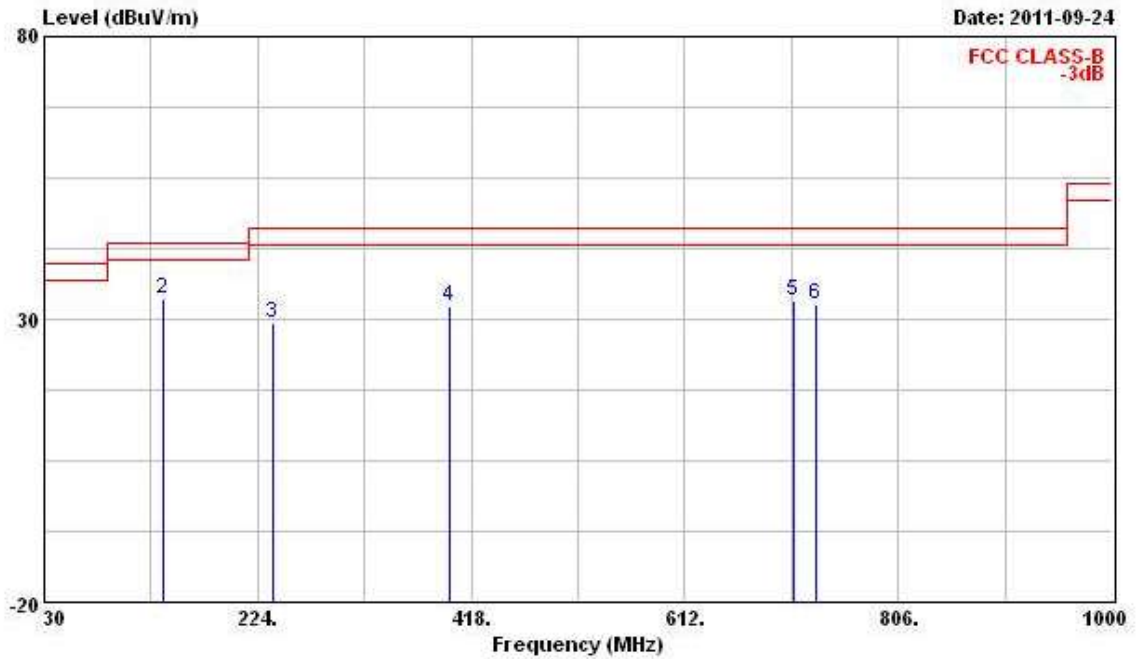

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	30.000	36.24	-3.76	40.00	46.13	18.48	-0.91	27.46 Peak	---	---
2	137.670	33.65	-9.85	43.50	48.65	11.64	1.04	27.68 Peak	---	---
3	238.550	29.20	-16.80	46.00	44.24	11.44	1.52	28.00 Peak	---	---
4	397.630	32.17	-13.83	46.00	41.93	16.38	2.47	28.61 Peak	---	---
5	710.940	33.36	-12.64	46.00	38.66	20.14	3.89	29.32 Peak	---	---
6	731.310	32.76	-13.24	46.00	37.76	20.43	3.95	29.38 Peak	---	---

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Final Test Date</b>	Sep. 28, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	Mode 4


**Horizontal**

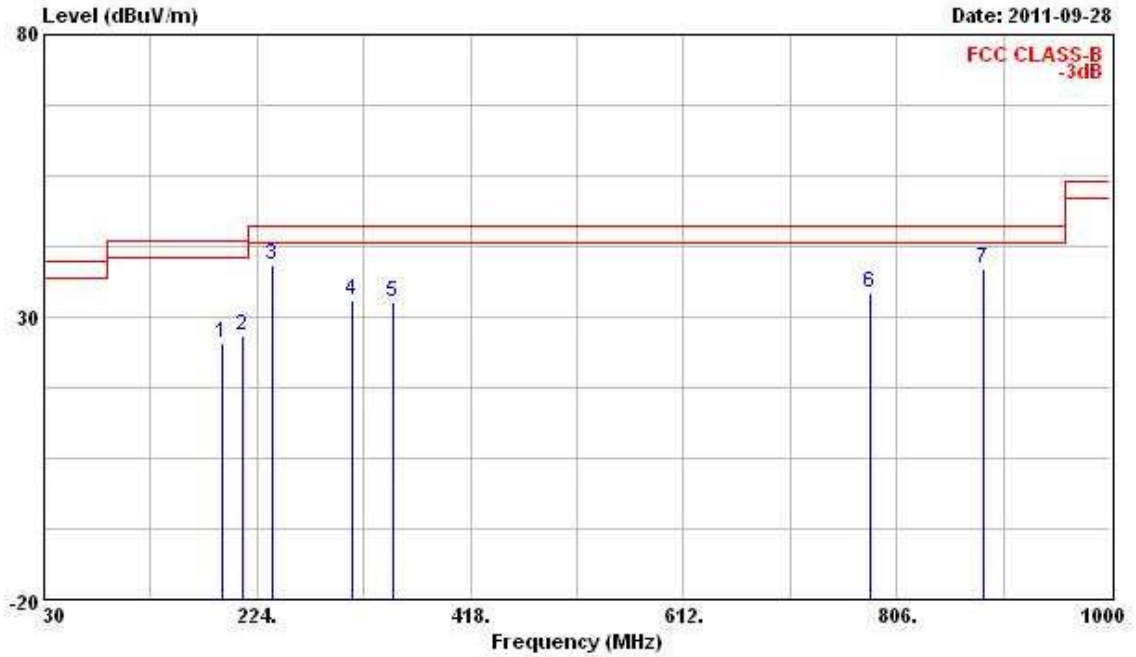

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	191.990	25.43	-18.07	43.50	42.89	9.29	1.20	27.95	Peak	---	---
2	210.420	26.83	-16.67	43.50	44.11	9.39	1.33	27.99	Peak	---	---
3	238.550	39.28	-6.72	46.00	54.32	11.44	1.52	28.00	Peak	---	---
4	311.300	33.02	-12.98	46.00	45.36	14.02	1.96	28.32	Peak	---	---
5	347.190	32.55	-13.45	46.00	43.87	14.92	2.21	28.45	Peak	---	---
6	781.750	34.26	-11.74	46.00	38.71	20.74	4.27	29.45	Peak	---	---
7	885.540	38.42	-7.58	46.00	42.01	20.98	4.81	29.38	Peak	---	---



Vertical

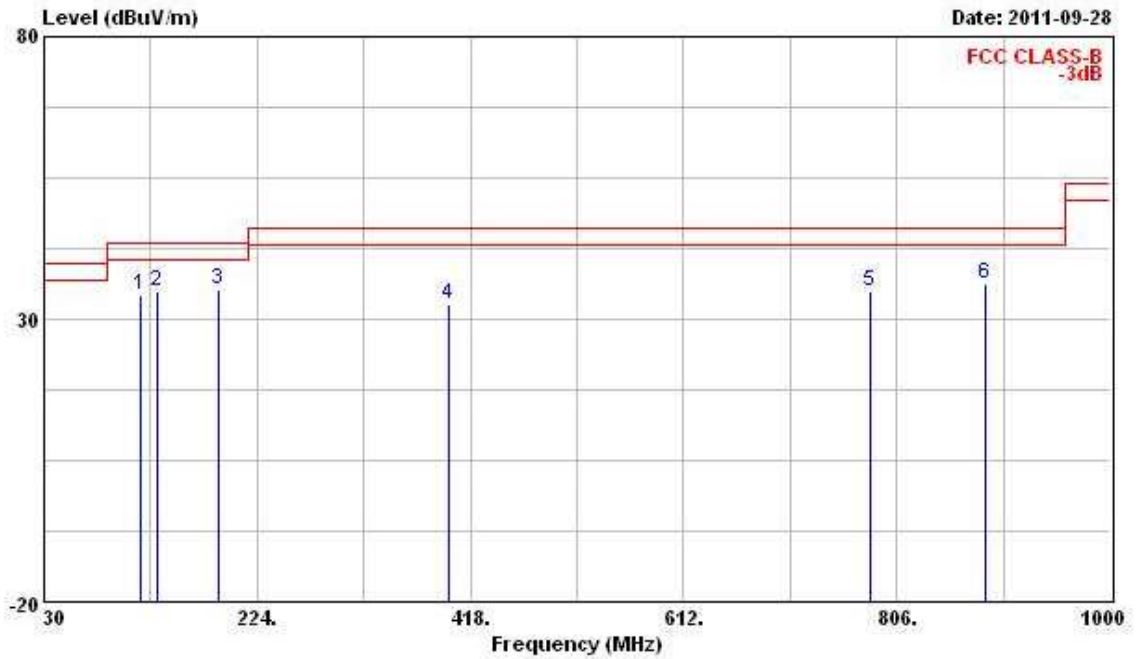

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	118.270	34.21	-9.29	43.50	48.19	12.61	0.94	27.53	Peak	---	---
2	133.790	34.89	-8.61	43.50	49.49	12.01	1.03	27.65	Peak	---	---
3	188.110	35.35	-8.15	43.50	52.89	9.17	1.22	27.93	Peak	---	---
4	397.630	32.61	-13.39	46.00	42.37	16.38	2.47	28.61	Peak	---	---
5	781.750	34.97	-11.03	46.00	39.42	20.74	4.27	29.45	Peak	---	---
6	886.510	36.11	-9.89	46.00	39.70	20.98	4.81	29.38	Peak	---	---

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




3.6.9 Results for Radiated Emissions (1GHz~40GHz)

For Single Chain:


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11a Ch. 36

Horizontal

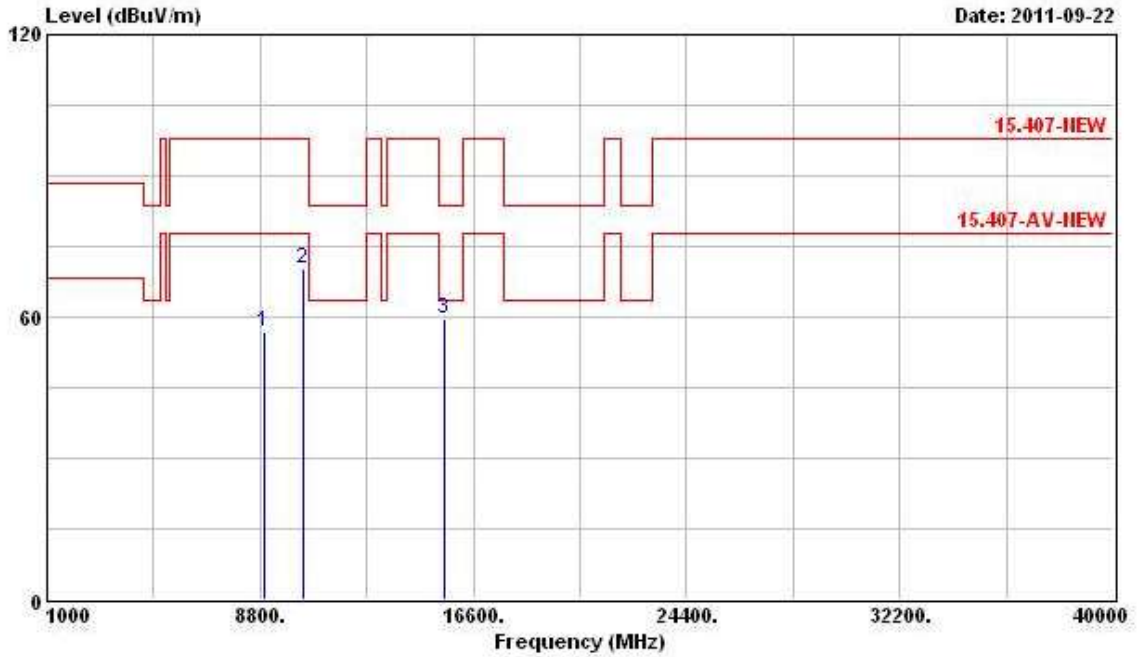

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8958.000	56.88	-40.96	97.84	44.74	38.93	6.40	33.19	Peak	---	---
2	10360.000	70.24	-27.60	97.84	57.01	39.31	6.93	33.01	Peak	---	---
3	15540.000	59.56	-3.98	63.54	45.56	38.53	7.92	32.45	PK	---	---


Vertical

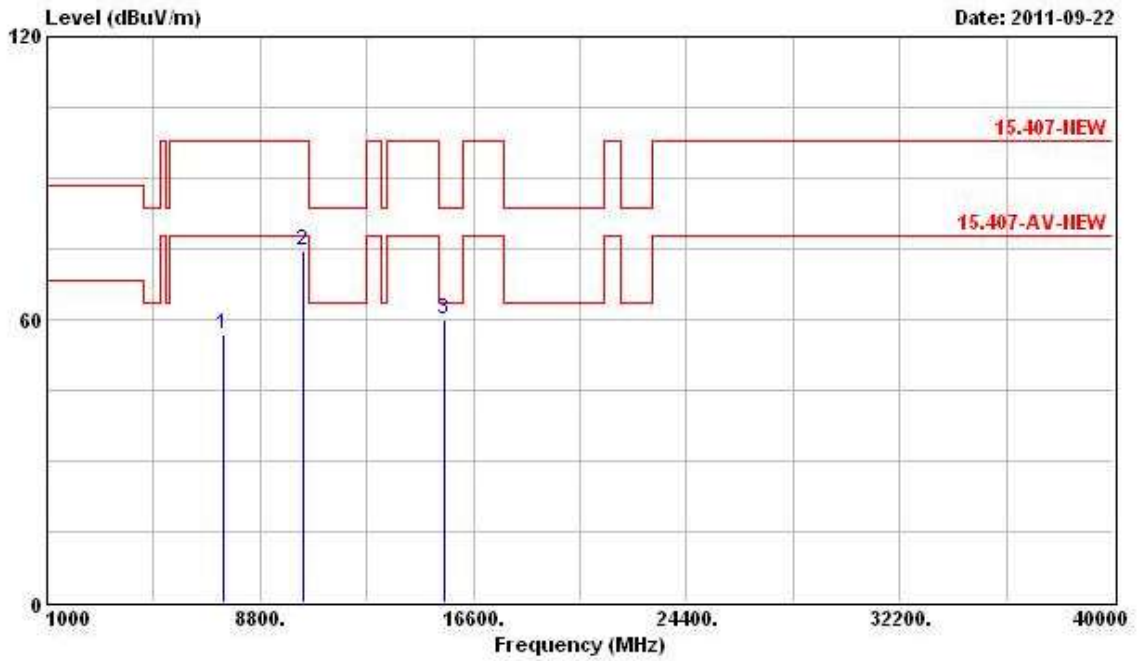

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7486.000	56.84	-21.00	77.84	46.20	37.80	5.78	32.94	PK	---	---
2	10360.000	74.58	-23.26	97.84	61.35	39.31	6.93	33.01	Peak	---	---
3 @	15540.000	60.01	-3.53	63.54	46.01	38.53	7.92	32.45	PK	---	---


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11a Ch. 40

Horizontal

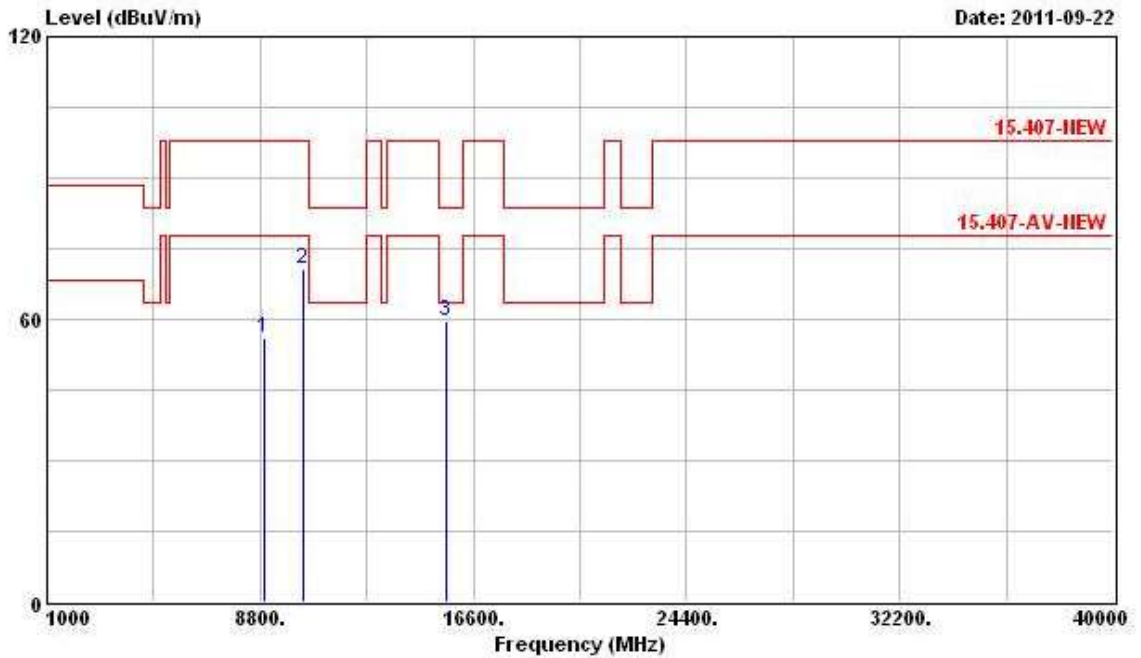

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8969.000	56.00	-41.84	97.84	43.84	38.95	6.40	33.20	Peak	---	---
2	10400.000	70.51	-27.33	97.84	57.26	39.28	6.93	32.96	Peak	---	---
3	15600.000	59.69	-3.85	63.54	45.86	38.39	7.92	32.48	PK	---	---


Vertical

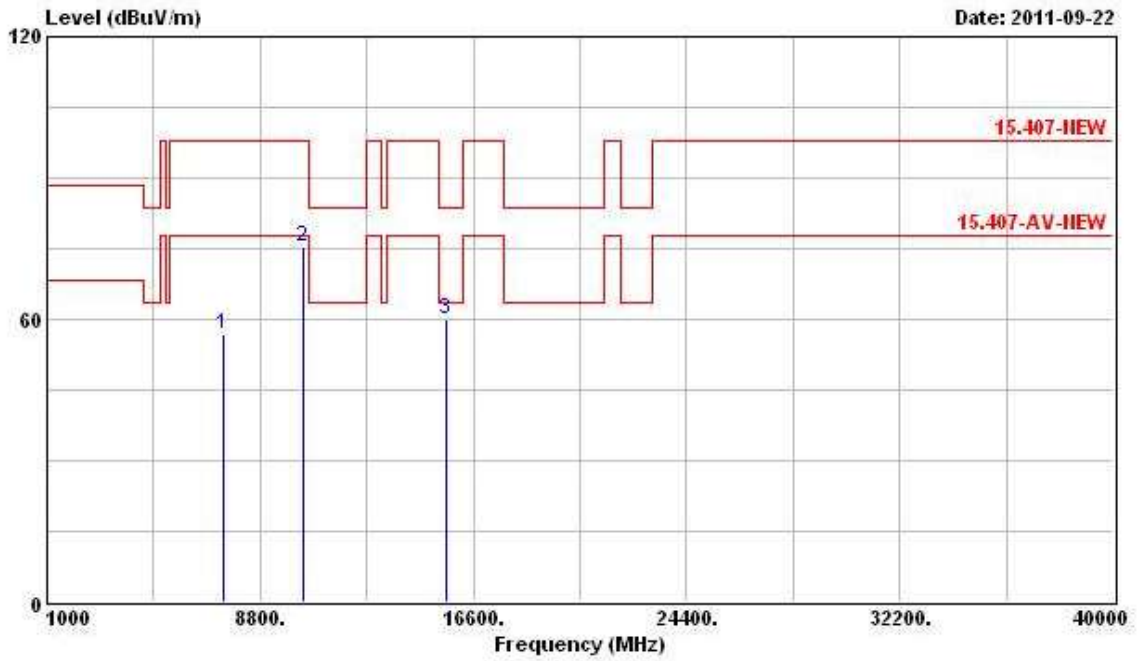

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7473.000	56.74	-21.10	77.84	46.16	37.74	5.78	32.94	PK	---	---
2	10400.000	75.37	-22.47	97.84	62.12	39.28	6.93	32.96	Peak	---	---
3	15600.000	60.17	-3.37	63.54	46.34	38.39	7.92	32.48	PK	---	---


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11a Ch. 48

Horizontal

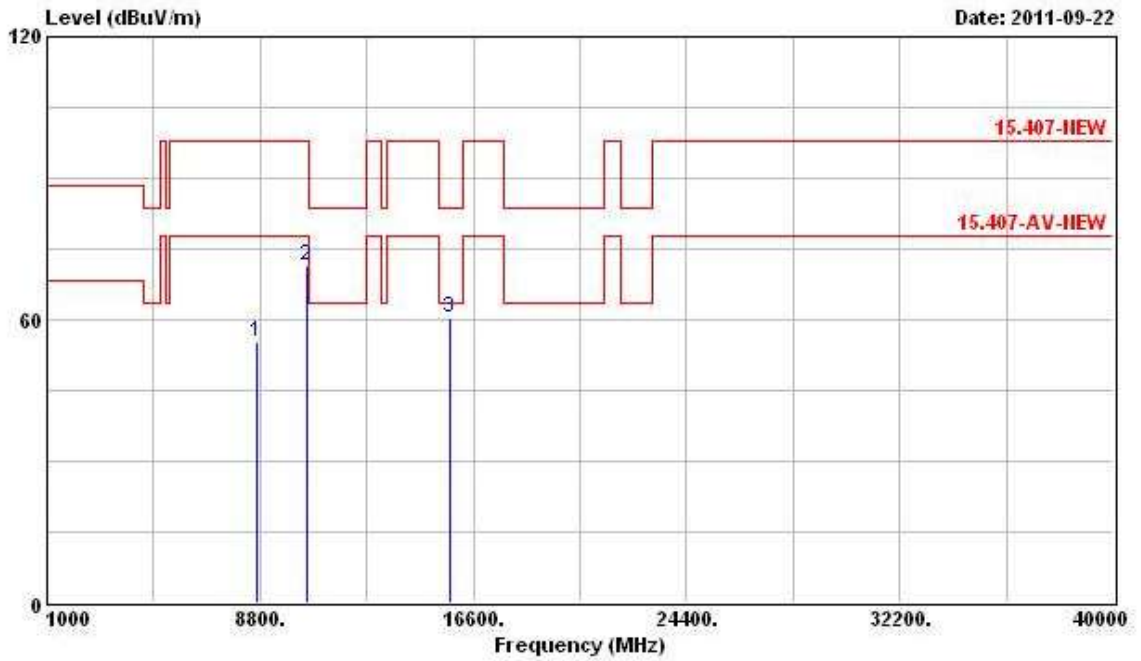

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8694.000	55.29	-42.55	97.84	43.40	38.58	6.41	33.11	Peak	---	---
2	10480.000	71.63	-26.21	97.84	58.37	39.21	6.94	32.90	Peak	---	---
3 @	15720.000	60.48	-3.06	63.54	46.93	38.15	7.92	32.52	PK	---	---


Vertical

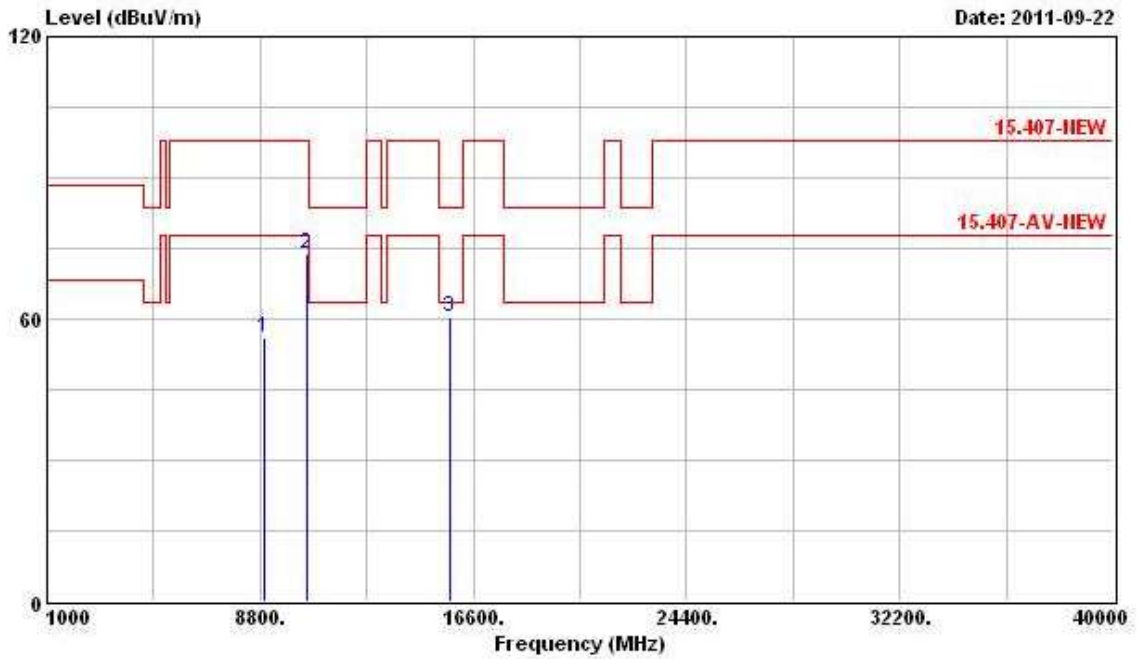

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8958.000	56.08	-41.76	97.84	43.94	38.93	6.40	33.19	Peak	---	---
2	10480.000	73.99	-23.85	97.84	60.73	39.21	6.94	32.90	Peak	---	---
3	15720.000	60.53	-3.01	63.54	46.98	38.15	7.92	32.52	PK	---	---


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11n Ch. 36 (20MHz) MCS0 (Ant. A)

Horizontal

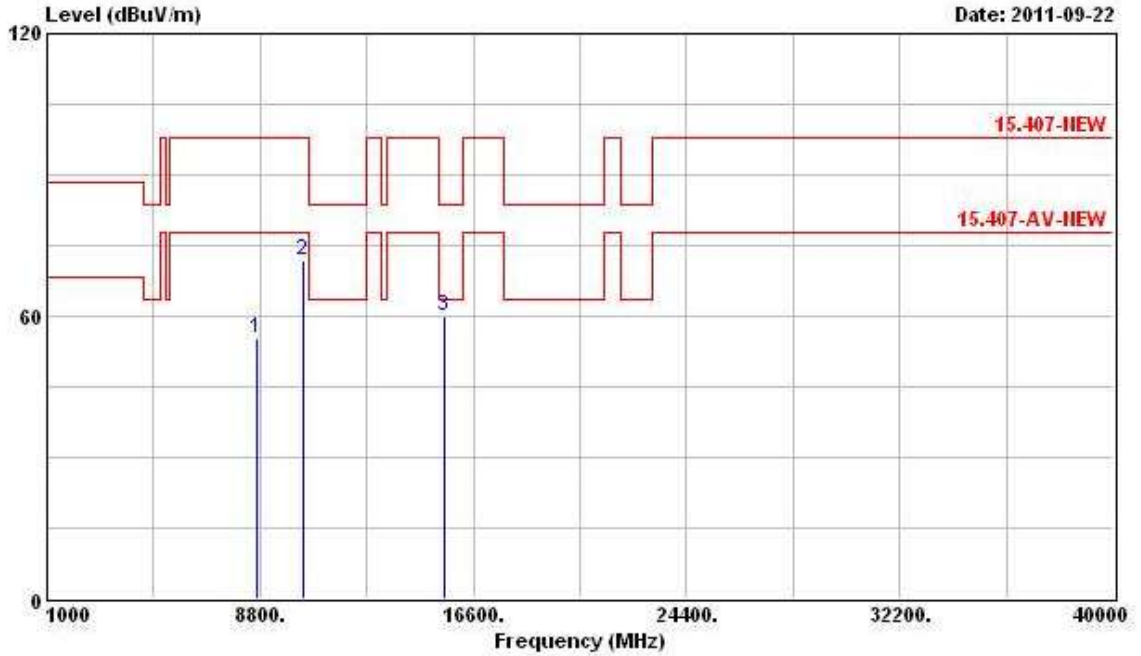

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8694.000	55.26	-42.58	97.84	43.37	38.58	6.41	33.11	Peak	---	---
2	10360.000	71.66	-26.18	97.84	58.43	39.31	6.93	33.01	Peak	---	---
3	15540.000	59.96	-3.58	63.54	45.96	38.53	7.92	32.45	PK	---	---

Vertical

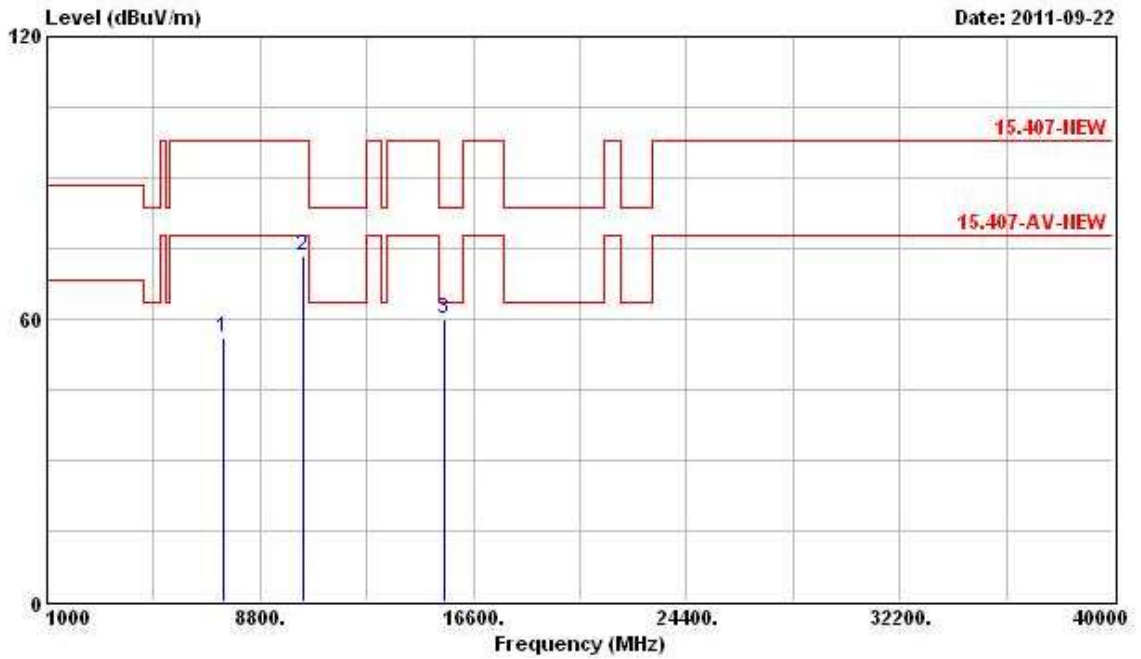


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7473.000	56.11	-21.73	77.84	45.53	37.74	5.78	32.94	PK	---	---
2	10360.000	73.27	-24.57	97.84	60.04	39.31	6.93	33.01	Peak	---	---
3	15540.000	60.17	-3.37	63.54	46.17	38.53	7.92	32.45	PK	---	---




Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11n Ch. 40 (20 MHz) MCS0 (Ant. A)

Horizontal

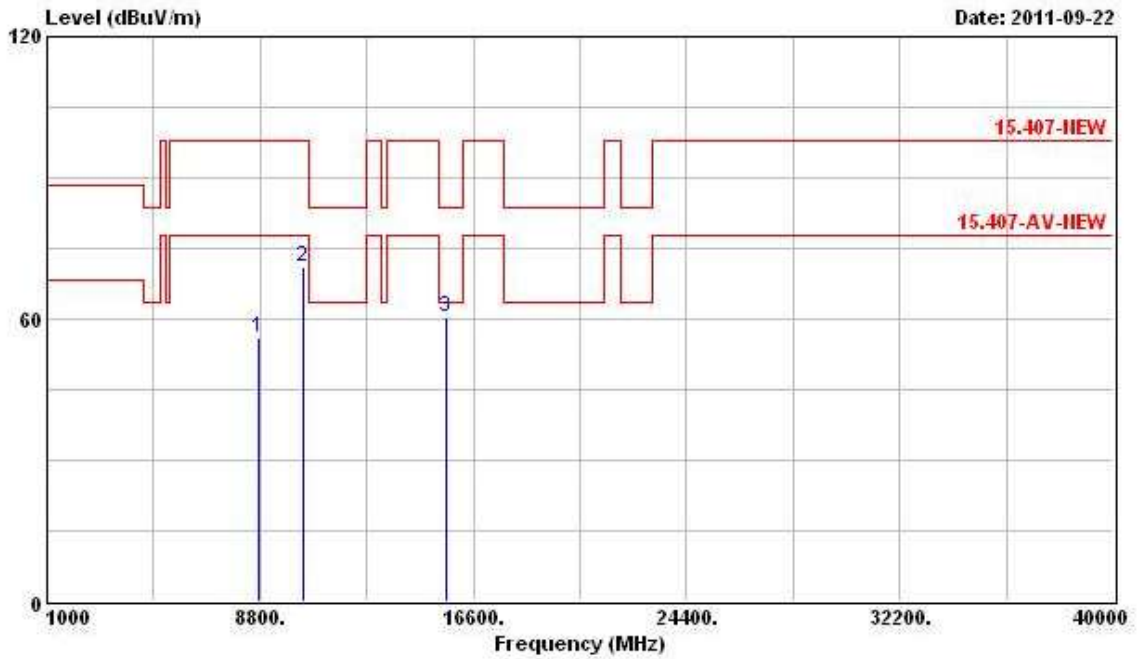

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8738.000	55.87	-41.97	97.84	43.95	38.63	6.41	33.12	Peak	---	---
2	10400.000	71.03	-26.81	97.84	57.78	39.28	6.93	32.96	Peak	---	---
3	15600.000	60.27	-3.27	63.54	46.44	38.39	7.92	32.48	PK	---	---


Vertical

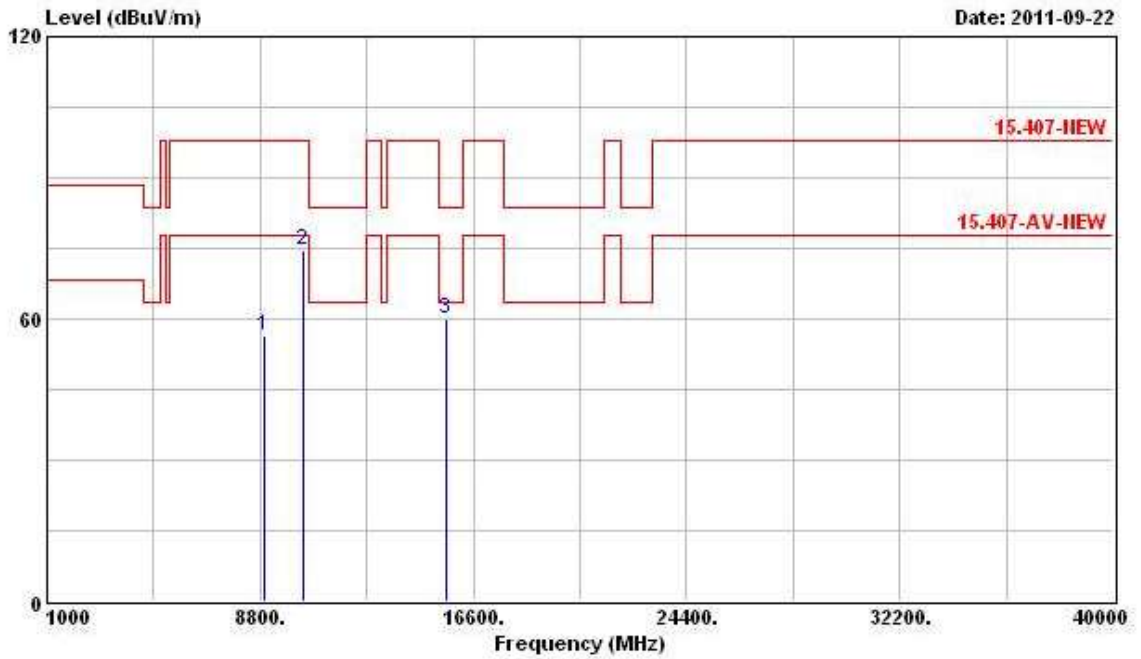

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	8925.000	56.47	-41.37	97.84	44.37	38.88	6.41	33.18 Peak	---	---
2	10400.000	74.73	-23.11	97.84	61.48	39.28	6.93	32.96 Peak	---	---
3	15600.000	59.97	-3.57	63.54	46.14	38.39	7.92	32.48 PK	---	---


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11n Ch. 48 (20 MHz) MCS0 (Ant. A)

Horizontal

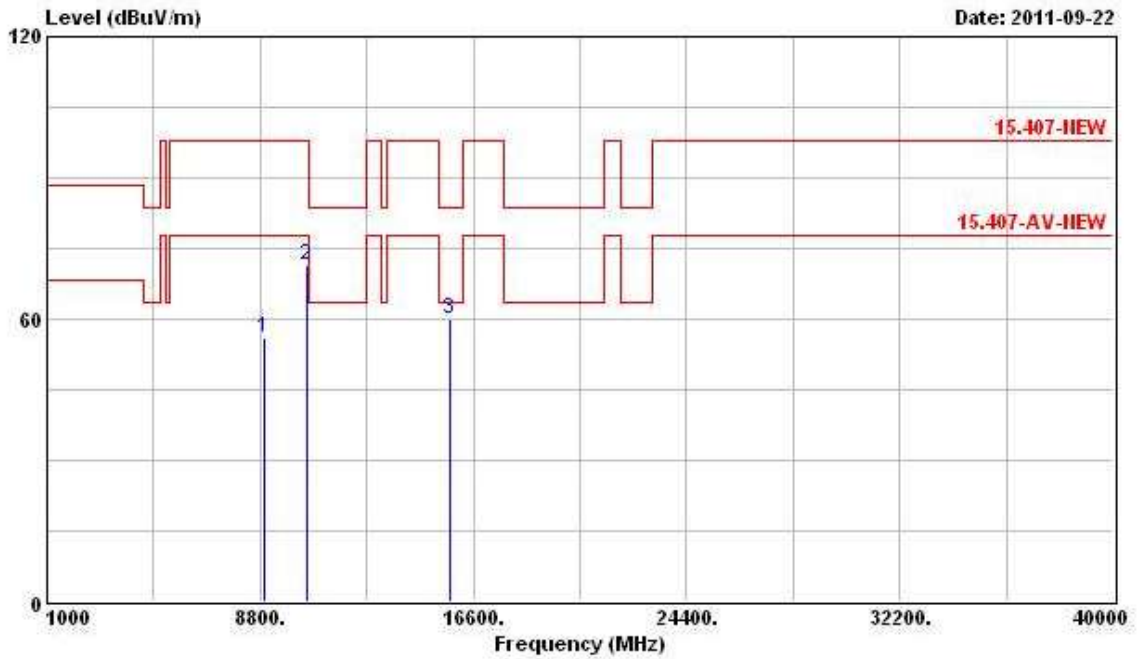

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8969.000	55.91	-41.93	97.84	43.75	38.95	6.40	33.20	Peak	---	---
2	10480.000	71.39	-26.45	97.84	58.13	39.21	6.94	32.90	Peak	---	---
3	15720.000	59.83	-3.71	63.54	46.28	38.15	7.92	32.52	PK	---	---


Vertical

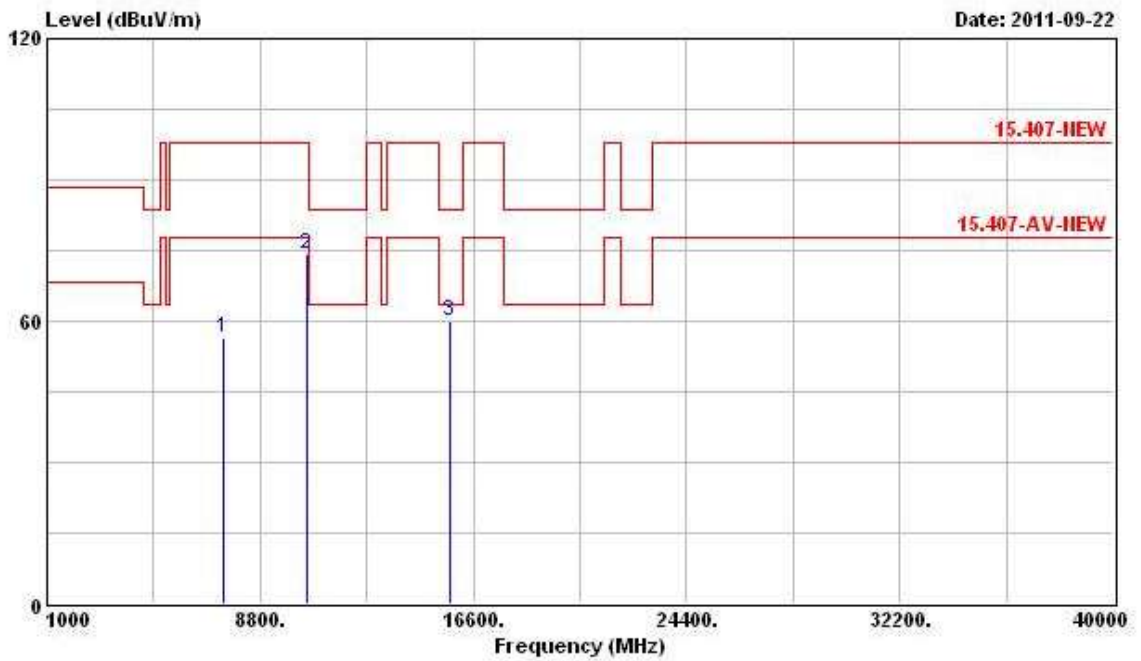

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7473.000	56.39	-21.45	77.84	45.81	37.74	5.78	32.94	PK	---	---
2	10480.000	74.02	-23.82	97.84	60.76	39.21	6.94	32.90	Peak	---	---
3	15720.000	59.93	-3.61	63.54	46.38	38.15	7.92	32.52	PK	---	---


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11n Ch. 38 (40MHz) MCS0 (Ant. A)

Horizontal

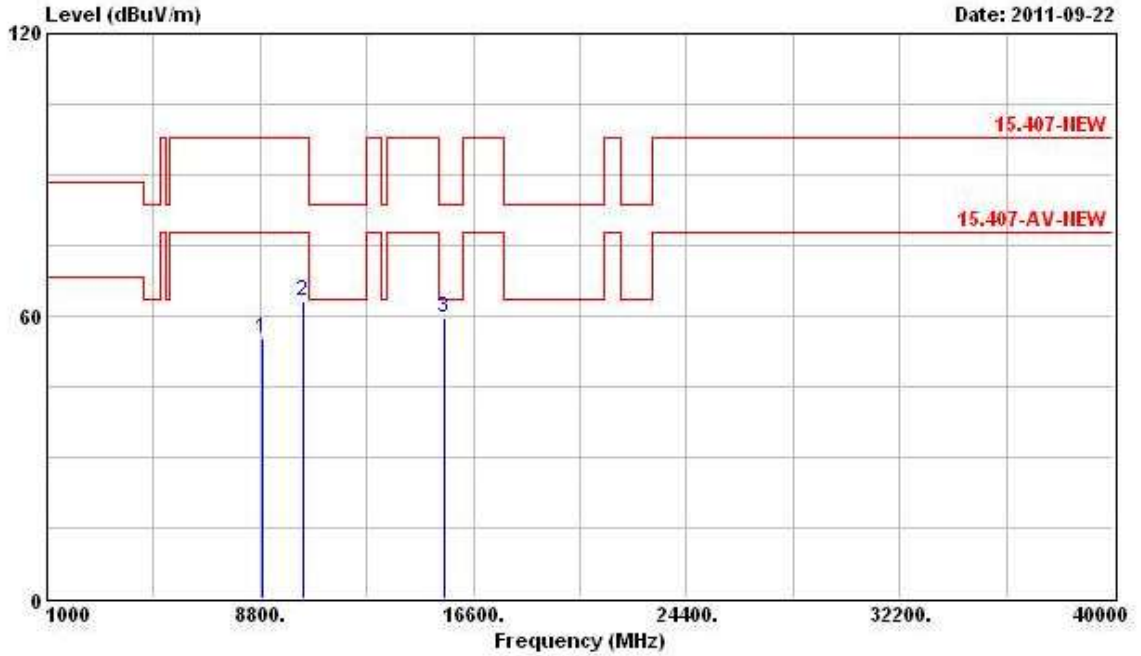

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	8881.000	55.14	-42.70	97.84	43.06	38.84	6.41	33.17 Peak	0	0
2	10380.000	63.03	-34.81	97.84	49.79	39.29	6.93	32.99 Peak	0	0
3	15570.000	59.52	-4.02	63.54	45.60	38.46	7.92	32.46 PK	0	0


Vertical

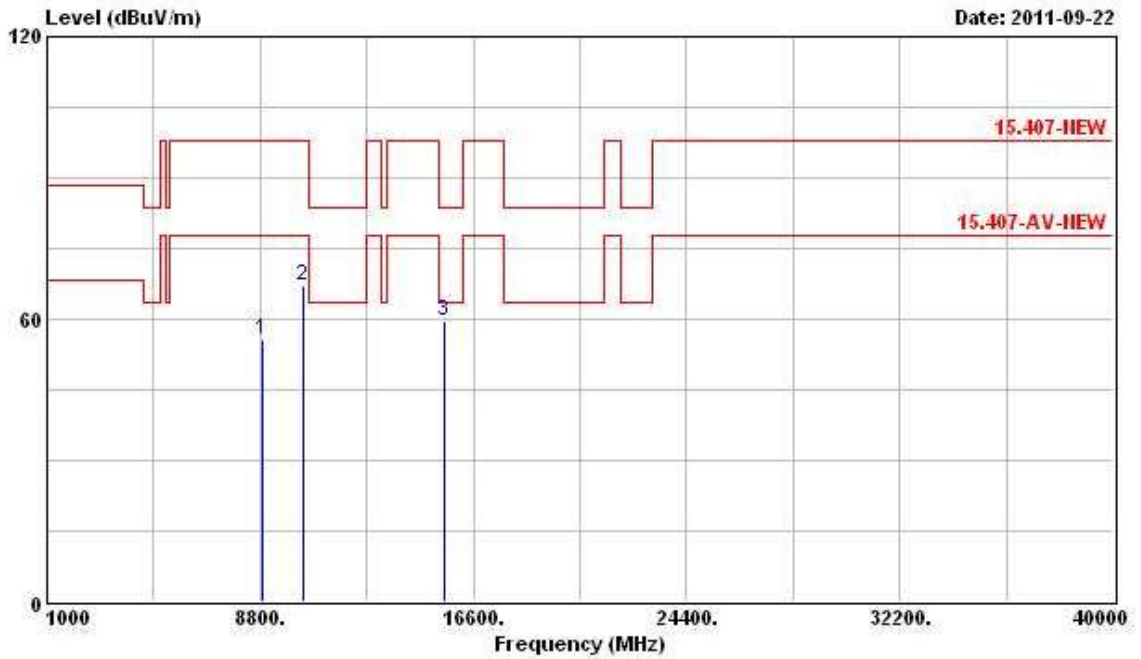

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8914.000	55.78	-42.06	97.84	43.67	38.88	6.41	33.18	Peak	---	---
2	10380.000	67.22	-30.62	97.84	53.98	39.29	6.93	32.99	Peak	---	---
3	15570.000	59.64	-3.90	63.54	45.72	38.46	7.92	32.46	PK	---	---


<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 46 (40MHz) MCS0 (Ant. A)

Horizontal

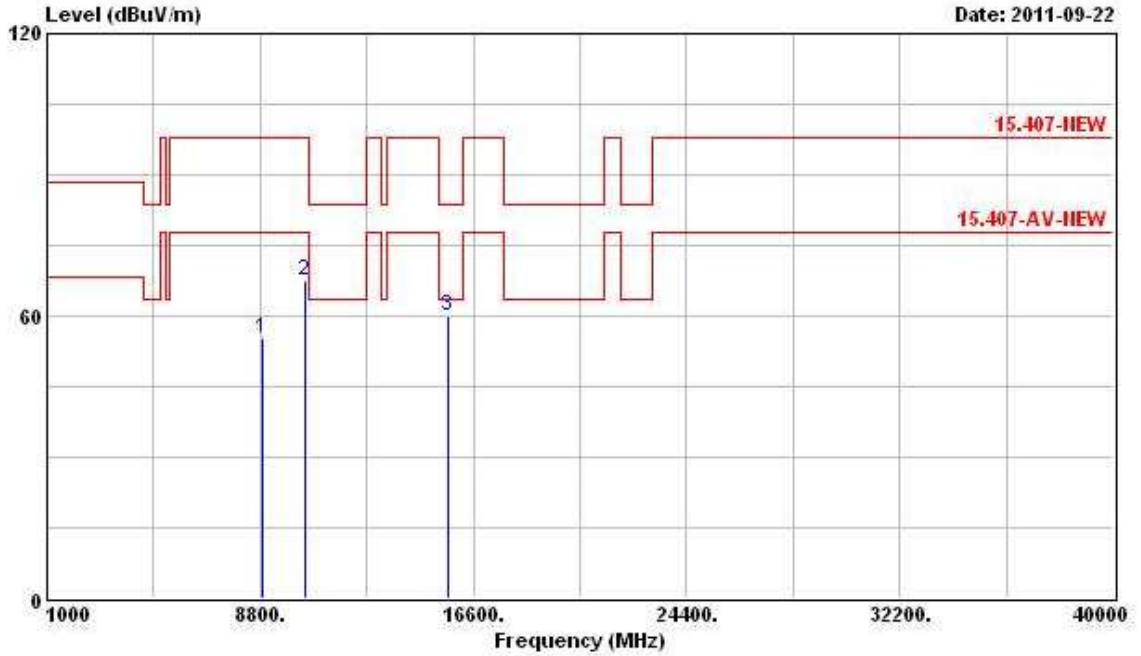

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8881.000	55.11	-42.73	97.84	43.03	38.84	6.41	33.17	Peak	---	---
2	10460.000	67.61	-30.23	97.84	54.35	39.24	6.94	32.92	Peak	---	---
3	15690.000	59.98	-3.56	63.54	46.35	38.22	7.92	32.51	PK	---	---

Vertical

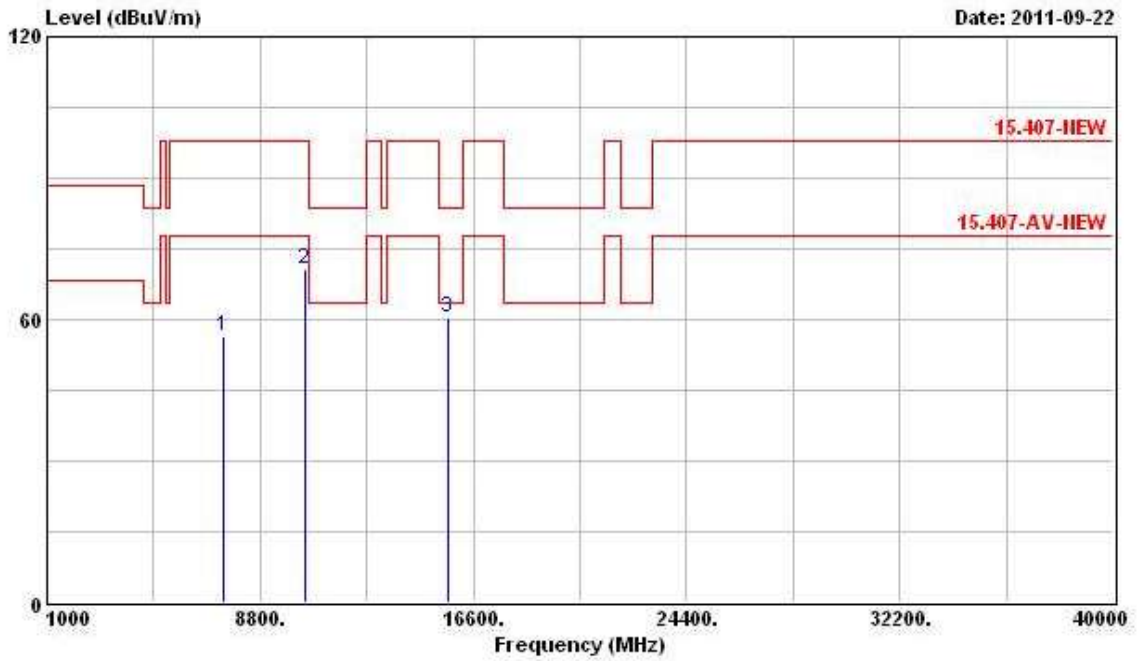


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7473.000	56.35	-21.49	77.84	45.77	37.74	5.78	32.94	PK	---	---
2	10460.000	70.52	-27.32	97.84	57.26	39.24	6.94	32.92	Peak	---	---
3 @	15690.000	60.34	-3.20	63.54	46.71	38.22	7.92	32.51	PK	---	---



For Two Chain:


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11n Ch. 36 (20MHz) MCS8 (Ant. A+B)

Horizontal

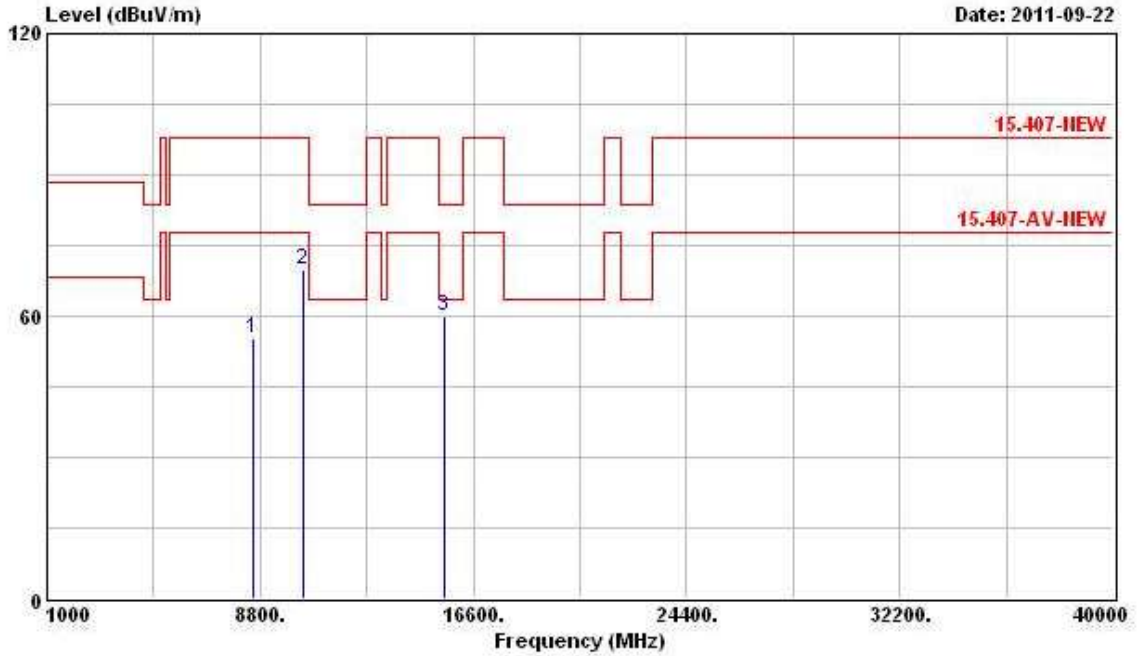

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	8529.000	55.12	-42.72	97.84	43.40	38.35	6.42	33.05 Peak	---	---
2	10360.000	69.89	-27.95	97.84	56.66	39.31	6.93	33.01 Peak	---	---
3	15540.000	59.92	-3.62	63.54	45.92	38.53	7.92	32.45 PK	---	---


Vertical

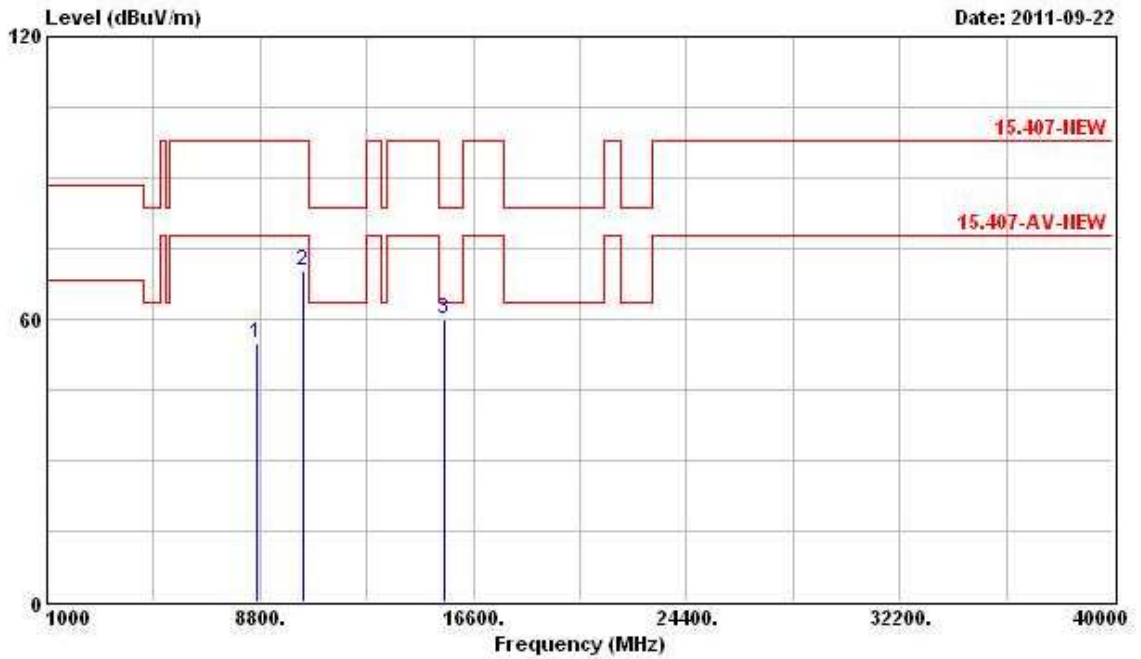

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8661.000	54.99	-42.85	97.84	43.13	38.53	6.42	33.09	Peak	---	---
2	10360.000	70.20	-27.64	97.84	56.97	39.31	6.93	33.01	Peak	---	---
3	15540.000	60.14	-3.40	63.54	46.14	38.53	7.92	32.45	PK	---	---


<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 40 (20 MHz) MCS8 (Ant. A+B)

Horizontal

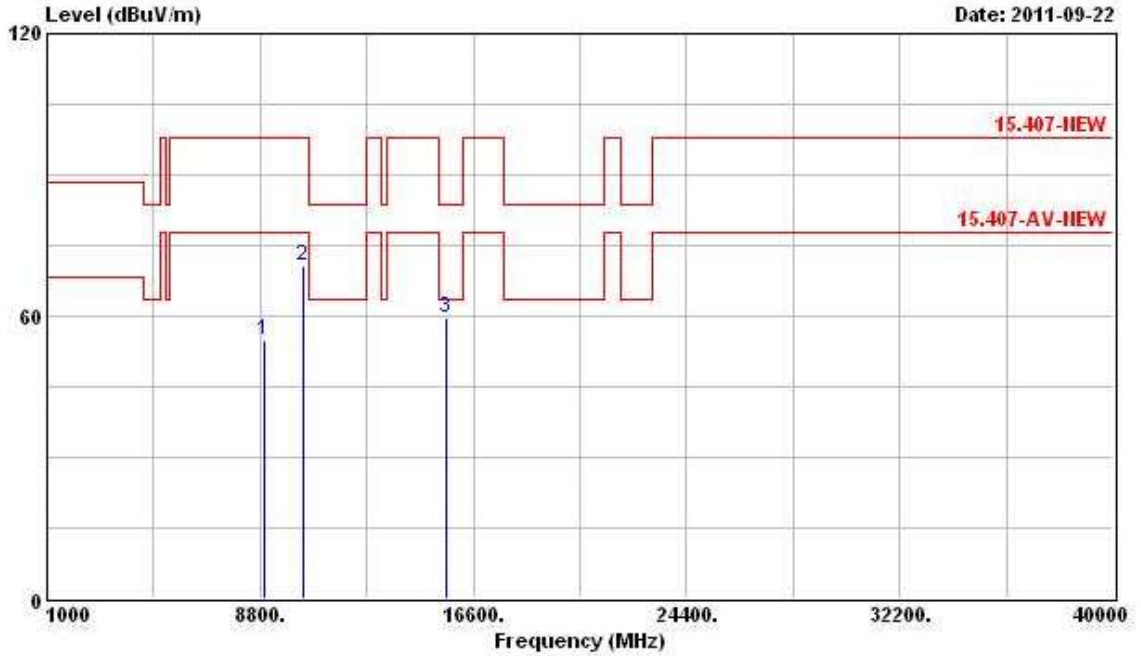

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8958.000	54.91	-42.93	97.84	42.77	38.93	6.40	33.19	Peak	---	---
2	10400.000	70.49	-27.35	97.84	57.24	39.28	6.93	32.96	Peak	---	---
3	15600.000	59.64	-3.90	63.54	45.81	38.39	7.92	32.48	PK	---	---


Vertical

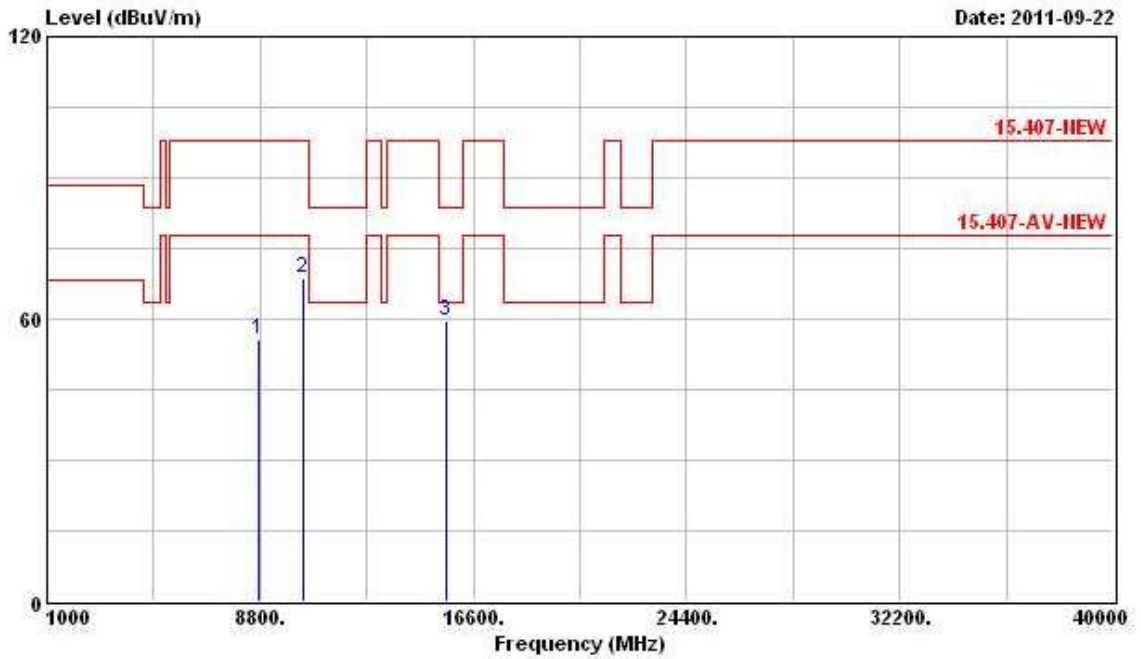

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8738.000	55.77	-42.07	97.84	43.85	38.63	6.41	33.12	Peak	---	---
2	10400.000	68.82	-29.02	97.84	55.57	39.28	6.93	32.96	Peak	---	---
3	15600.000	59.48	-4.06	63.54	45.65	38.39	7.92	32.48	PK	---	---


<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 48 (20 MHz) MCS8 (Ant. A+B)

Horizontal

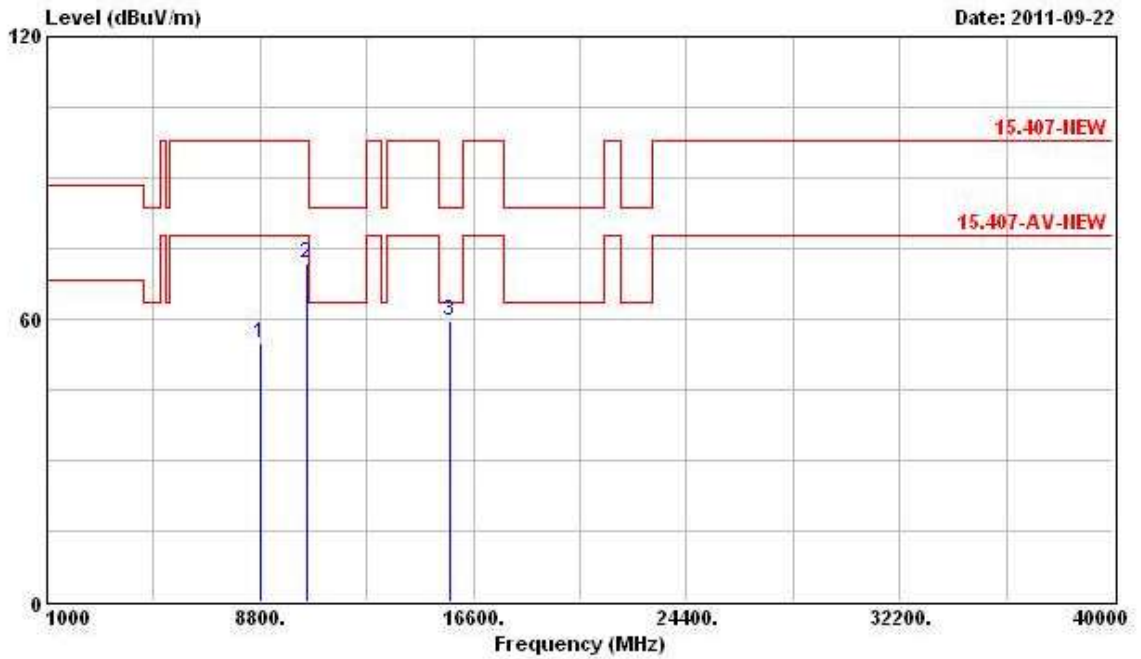

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8837.000	54.75	-43.09	97.84	42.73	38.77	6.41	33.15	Peak	---	---
2	10480.000	71.68	-26.16	97.84	58.42	39.21	6.94	32.90	Peak	---	---
3	15720.000	59.69	-3.85	63.54	46.14	38.15	7.92	32.52	PK	---	---


Vertical

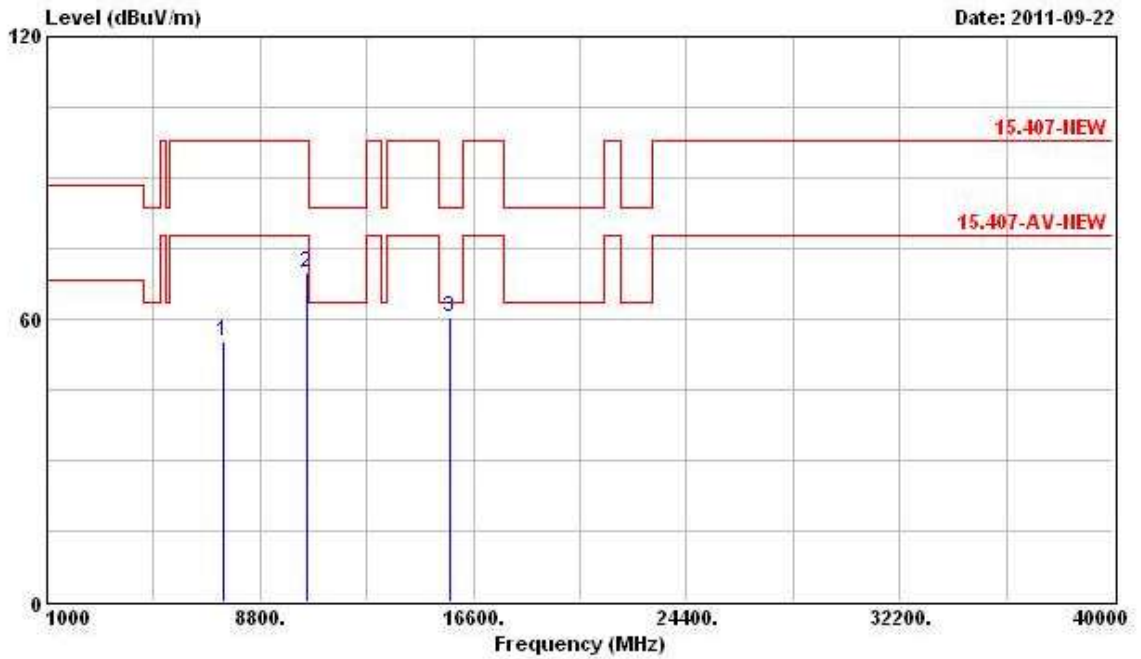

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7473.000	55.26	-22.58	77.84	44.68	37.74	5.78	32.94	PK	---	---
2	10480.000	69.93	-27.91	97.84	56.67	39.21	6.94	32.90	Peak	---	---
3	15720.000	60.23	-3.31	63.54	46.68	38.15	7.92	32.52	PK	---	---


Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11n Ch. 38 (40MHz) MCS8 (Ant. A+B)

Horizontal

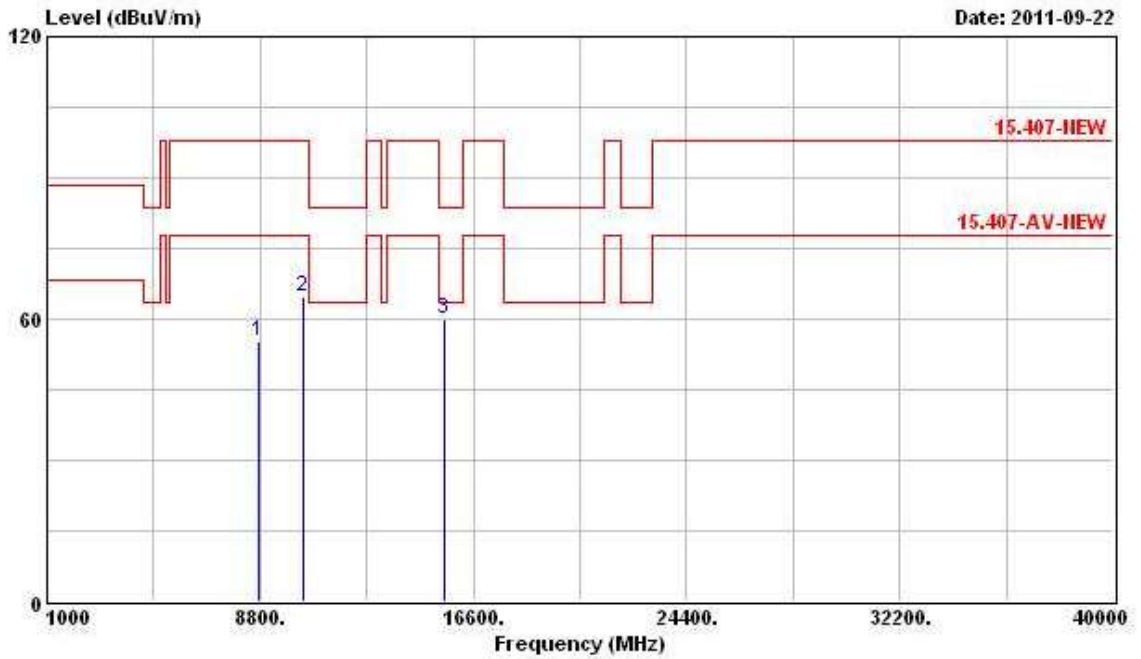

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	8738.000	55.30	-42.54	97.84	43.38	38.63	6.41	33.12 Peak	---	---
2	10360.000	64.92	-32.92	97.84	51.69	39.31	6.93	33.01 Peak	---	---
3	15540.000	60.07	-3.47	63.54	46.07	38.53	7.92	32.45 PK	---	---

Vertical

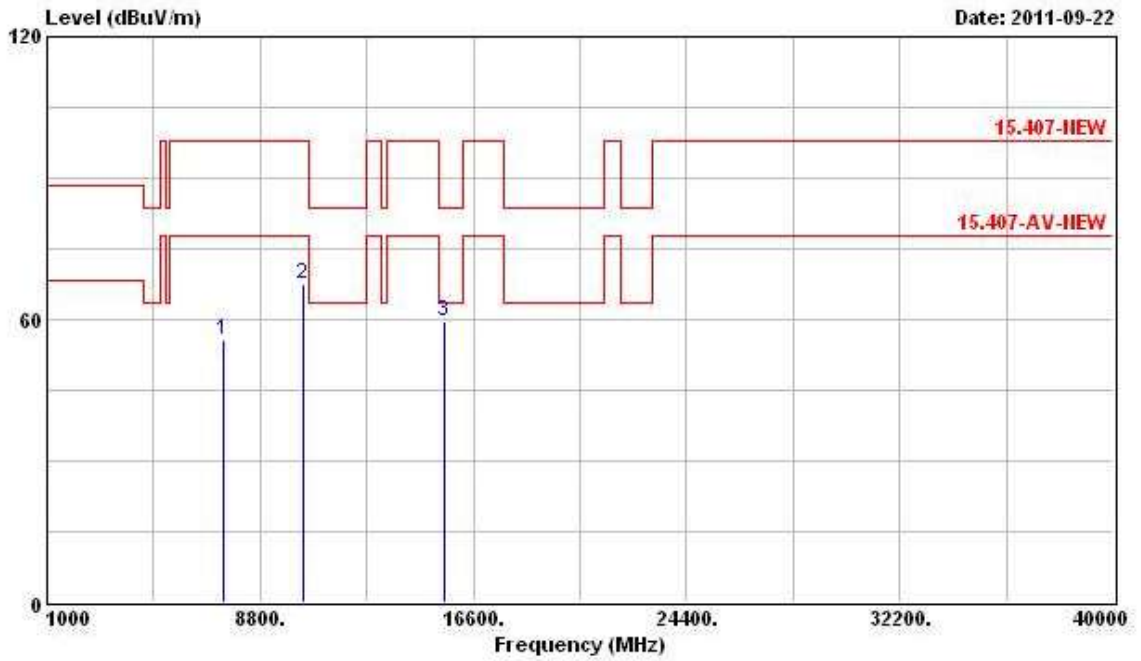


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7473.000	55.54	-22.30	77.84	44.96	37.74	5.78	32.94	PK	---	---
2	10380.000	67.46	-30.38	97.84	54.22	39.29	6.93	32.99	Peak	---	---
3	15570.000	59.43	-4.11	63.54	45.51	38.46	7.92	32.46	PK	---	---




<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n Ch. 46 (40MHz) MCS8 (Ant. A+B)

Horizontal

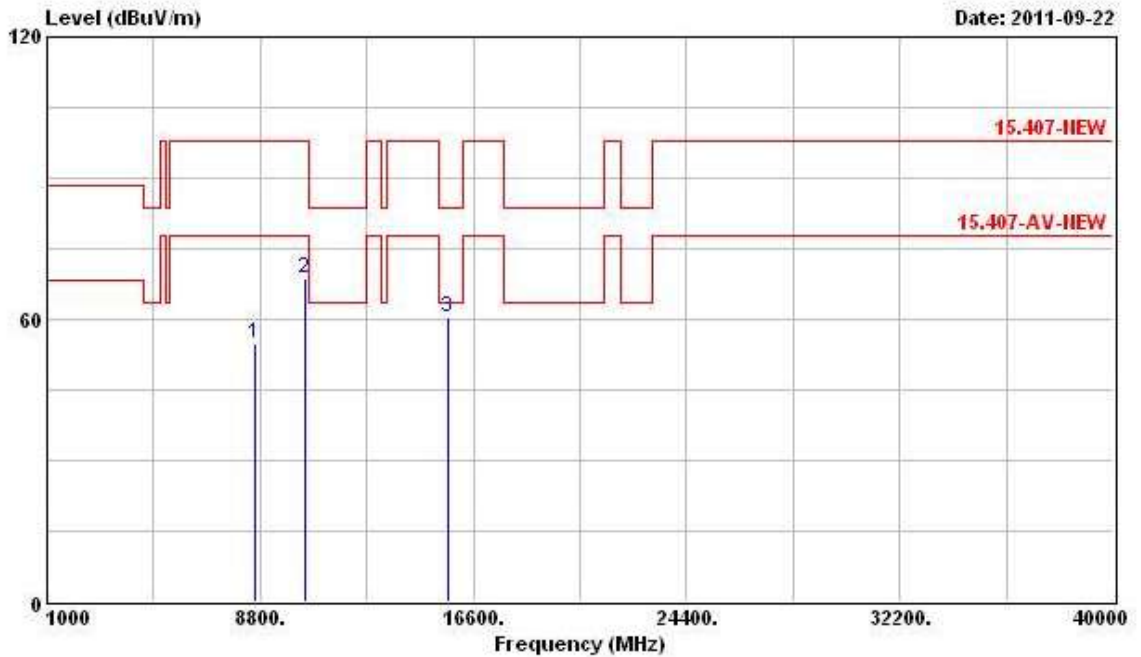

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8617.000	54.92	-42.92	97.84	43.12	38.46	6.42	33.08	Peak	---	---
2	10460.000	68.75	-29.09	97.84	55.49	39.24	6.94	32.92	Peak	---	---
3	15690.000	60.28	-3.26	63.54	46.65	38.22	7.92	32.51	PK	---	---

Vertical

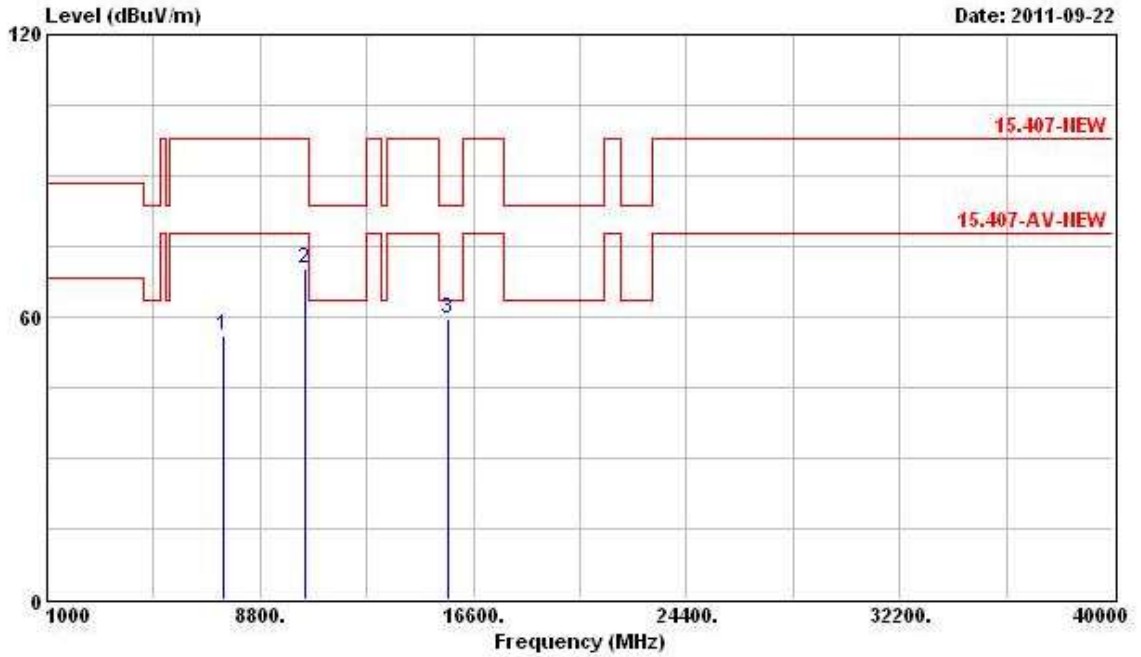

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	7473.000	56.04	-21.80	77.84	45.46	37.74	5.78	32.94 PK	---	---
2	10460.000	70.29	-27.55	97.84	57.03	39.24	6.94	32.92 Peak	---	---
3	15690.000	59.61	-3.93	63.54	45.98	38.22	7.92	32.51 PK	---	---

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

**3.7 Band Edge and Fundamental Emissions Measurement**

**3.7.1 Limit**

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micovolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.7.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz /1 MHz for Peak

**3.7.3 Test Procedures**

1. The test procedure is the same as section 3.6.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.7.4 Test Setup Layout**

This test setup layout is the same as that shown in section 3.6.4.

**3.7.5 Test Deviation**

There is no deviation with the original standard.

**3.7.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

3.7.7 Test Result of Band Edge and Fundamental Emissions

For Single Chain:

Final Test Date	Sep. 22, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	56%
Test Engineer	Daniel	Configuration	802.11a Ch. 36, 40, 48

Channel 36

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 ☺	5149.900	61.12	-2.42	63.54	20.94	34.79	5.39	0.00	Average	---	---
2 ☺	5184.200	109.40			69.20	34.81	5.39	0.00	Average	---	---
1	5147.900	78.70	-4.84	83.54	38.52	34.79	5.39	0.00	Peak	---	---
2 ☺	5181.800	119.72			79.52	34.81	5.39	0.00	Peak	---	---

The item 2 is fundamental emissions.

Channel 40

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5148.900	57.18	-6.36	63.54	17.00	34.79	5.39	0.00	Average	---	---
2 ☺	5197.800	109.16			68.96	34.82	5.38	0.00	Average	---	---
3	5366.100	57.21	-6.33	63.54	16.92	34.92	5.37	0.00	Average	---	---
1	5147.700	71.60	-11.94	83.54	31.42	34.79	5.39	0.00	Peak	---	---
2 ☺	5196.600	119.89			79.69	34.82	5.38	0.00	Peak	---	---
3	5386.200	71.06	-12.48	83.54	30.76	34.93	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.

Channel 48

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5136.900	56.63	-6.91	63.54	16.46	34.78	5.39	0.00	Average	---	---
2 ☺	5242.200	109.50			69.27	34.85	5.38	0.00	Average	---	---
3	5394.600	57.10	-6.44	63.54	16.80	34.94	5.36	0.00	Average	---	---
1	5134.500	70.68	-12.86	83.54	30.51	34.78	5.39	0.00	Peak	---	---
2 ☺	5241.300	120.15			79.93	34.84	5.38	0.00	Peak	---	---
3	5375.400	71.03	-12.51	83.54	30.74	34.92	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.

<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n (20MHz) Ch. 36, 40, 48 MCS0 (Ant. A)

**Channel 36**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5150.000	60.19	-3.35	63.54	20.01	34.79	5.39	0.00	Average	---	---
2	5183.100	108.70			68.50	34.81	5.39	0.00	Average	---	---
1	5147.400	79.56	-3.98	83.54	39.38	34.79	5.39	0.00	Peak	---	---
2	5183.800	120.53			80.33	34.81	5.39	0.00	Peak	---	---

The item 2 is fundamental emissions.

**Channel 40**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5150.000	57.18	-6.36	63.54	17.00	34.79	5.39	0.00	Average	---	---
2	5196.900	108.41			68.21	34.82	5.38	0.00	Average	---	---
3	5364.900	57.19	-6.35	63.54	16.90	34.92	5.37	0.00	Average	---	---
1	5147.700	71.09	-12.45	83.54	30.91	34.79	5.39	0.00	Peak	---	---
2	5196.600	119.87			79.67	34.82	5.38	0.00	Peak	---	---
3	5363.700	70.52	-13.02	83.54	30.23	34.92	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.

**Channel 48**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5106.900	56.57	-6.97	63.54	16.41	34.77	5.39	0.00	Average	---	---
2	5243.400	108.58			68.35	34.85	5.38	0.00	Average	---	---
3	5399.400	57.15	-6.39	63.54	16.85	34.94	5.36	0.00	Average	---	---
1	5117.700	70.00	-13.54	83.54	29.84	34.77	5.39	0.00	Peak	---	---
2	5246.100	120.05			79.82	34.85	5.38	0.00	Peak	---	---
3	5387.400	70.38	-13.16	83.54	30.08	34.93	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.

<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	802.11n (40MHz) Ch. 38, 46 MCS0 (Ant. A)

**Channel 38**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5150.000	61.65	-1.89	63.54	21.47	34.79	5.39	0.00	Average	---	---
2	5199.000	103.12			62.92	34.82	5.38	0.00	Average	---	---
1	5149.900	77.59	-5.95	83.54	37.41	34.79	5.39	0.00	Peak	---	---
2	5199.100	114.00			73.80	34.82	5.38	0.00	Peak	---	---

The item 2 is fundamental emissions.

**Channel 46**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5149.750	57.95	-5.59	63.54	17.77	34.79	5.39	0.00	Average	---	---
2	5238.750	105.52			65.30	34.84	5.38	0.00	Average	---	---
3	5352.500	57.46	-6.08	63.54	17.18	34.91	5.37	0.00	Average	---	---
1	5146.750	71.99	-11.55	83.54	31.81	34.79	5.39	0.00	Peak	---	---
2	5238.750	116.45			76.23	34.84	5.38	0.00	Peak	---	---
3	5367.500	71.67	-11.87	83.54	31.38	34.92	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.

**For Two Chain:**

<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Daniel	<b>Configuration</b>	802.11n (20MHz) Ch. 36, 40, 48 MCS8 (Ant. A+B)

**Channel 36**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5150.000	61.73	-1.81	63.54	21.55	34.79	5.39	0.00	Average	---	---
2	5184.200	111.58			71.38	34.81	5.39	0.00	Average	---	---
1	5147.400	78.46	-5.08	83.54	38.28	34.79	5.39	0.00	Peak	---	---
2	5181.900	121.47			81.27	34.81	5.39	0.00	Peak	---	---

The item 2 is fundamental emissions.

**Channel 40**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5141.700	56.83	-6.71	63.54	16.65	34.79	5.39	0.00	Average	---	---
2	5196.600	109.89			69.69	34.82	5.38	0.00	Average	---	---
3	5353.800	57.21	-6.33	63.54	16.93	34.91	5.37	0.00	Average	---	---
1	5142.900	71.65	-11.89	83.54	31.47	34.79	5.39	0.00	Peak	---	---
2	5196.600	121.51			81.31	34.82	5.38	0.00	Peak	---	---
3	5376.900	70.53	-13.01	83.54	30.24	34.92	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.

**Channel 48**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5111.400	56.55	-6.99	63.54	16.39	34.77	5.39	0.00	Average	---	---
2	5236.500	109.10			68.88	34.84	5.38	0.00	Average	---	---
3	5395.800	57.09	-6.45	63.54	16.79	34.94	5.36	0.00	Average	---	---
1	5102.100	70.17	-13.37	83.54	30.02	34.76	5.39	0.00	Peak	---	---
2	5237.400	120.56			80.34	34.84	5.38	0.00	Peak	---	---
3	5384.100	70.44	-13.10	83.54	30.14	34.93	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.

<b>Final Test Date</b>	Sep. 22, 2011	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	802.11n (40MHz) Ch. 38, 46 MCS8 (Ant. A+B)

**Channel 38**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 [a]	5150.000	62.39	-1.15	63.54	22.21	34.79	5.39	0.00	Average	---	---
2 [a]	5199.100	105.31			65.11	34.82	5.38	0.00	Average	---	---
1	5148.600	78.45	-5.09	83.54	38.27	34.79	5.39	0.00	Peak	---	---
2 [a]	5198.200	116.32			76.12	34.82	5.38	0.00	Peak	---	---

The item 2 is fundamental emissions.

**Channel 46**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	5148.750	57.58	-5.96	63.54	17.40	34.79	5.39	0.00	Average	---	---
2 [a]	5221.500	106.36			66.15	34.83	5.38	0.00	Average	---	---
3	5356.500	57.34	-6.20	63.54	17.06	34.91	5.37	0.00	Average	---	---
1	5146.500	71.78	-11.76	83.54	31.60	34.79	5.39	0.00	Peak	---	---
2 [a]	5220.500	117.61			77.40	34.83	5.38	0.00	Peak	---	---
3	5359.500	70.34	-13.20	83.54	30.06	34.91	5.37	0.00	Peak	---	---

The item 2 is fundamental emissions.



**3.8 Frequency Stability Measurement**

**3.8.1 Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual or ±20ppm (IEEE 802.11a specification).

**3.8.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

**3.8.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than ±20ppm (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -30°C~50°C.
8. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.8.4 Test Setup Layout**

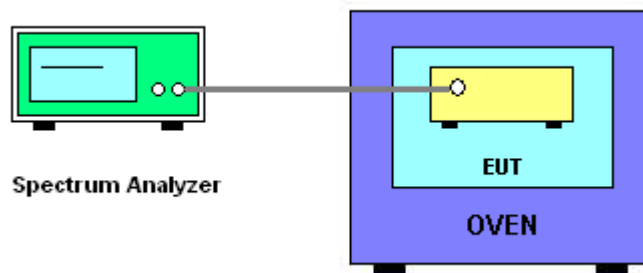

**3.8.5 Test Deviation**

There is no deviation with the original standard.

**3.8.6 EUT Operation during Test**

The EUT was programmed to be in continuously un-modulation transmitting mode.

**3.8.7 Test Result of Frequency Stability**

**Voltage vs. Frequency Stability**

<b>Voltage (V)</b>	<b>Measurement Frequency (MHz)</b>
<b>126.5</b>	<b>5240 MHz</b>
<b>110</b>	5239.977800
<b>93.5</b>	5239.978400
	5239.977800
<b>Max. Deviation (MHz)</b>	<b>0.022200</b>
<b>Max. Deviation (ppm)</b>	<b>4.24</b>

**Temperature vs. Frequency Stability**

<b>Temperature (°C)</b>	<b>Measurement Frequency (MHz)</b>
<b>-30</b>	<b>5240 MHz</b>
<b>-20</b>	5240.075000
<b>-10</b>	5240.064200
<b>0</b>	5240.053400
<b>10</b>	5240.035400
<b>20</b>	5240.021600
<b>30</b>	5240.009000
<b>40</b>	5239.988600
<b>50</b>	5239.977800
	5239.976000
<b>Max. Deviation (MHz)</b>	<b>0.075000</b>
<b>Max. Deviation (ppm)</b>	<b>14.31</b>

<b>Voltage (V)</b>	<b>Measurement Frequency (MHz)</b>
<b>126.5</b>	<b>5230 MHz</b>
<b>110</b>	5229.977800
<b>93.5</b>	5229.977200
	5229.977200
<b>Max. Deviation (MHz)</b>	<b>0.022800</b>
<b>Max. Deviation (ppm)</b>	<b>4.36</b>

**Temperature vs. Frequency Stability**

<b>Temperature (°C)</b>	<b>Measurement Frequency (MHz)</b>
<b>-30</b>	<b>5230 MHz</b>
<b>-20</b>	5230.074800
<b>-10</b>	5230.066000
<b>0</b>	5230.051600
<b>10</b>	5230.034800
<b>20</b>	5230.018600
<b>30</b>	5230.010200
<b>40</b>	5229.989200
<b>50</b>	5229.977800
	5229.976600
<b>Max. Deviation (MHz)</b>	<b>0.074800</b>
<b>Max. Deviation (ppm)</b>	<b>14.30</b>

### **3.9 Antenna Requirements**

#### **3.9.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.9.2 Antenna Connector Construction**

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

**4 LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Receiver	R&S	ESCS 30	100357	9 kHz - 2.75 GHz	Nov. 16, 2010	Conduction (CO01-NH)
LISN	SCHAFFNER	NNB41	04/10153	9kHz - 30MHz	Nov. 16, 2010	Conduction (CO01-NH)
Power Filter	CORCOM	MR12030	N/A	30A*2	N/A	Conduction (CO01-NH)
RF Cable-CON	Suhner Switzerland	RG223/U	CB004	9kHz - 30MHz	Dec. 14, 2010	Conduction (CO01-NH)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023	9KHz ~ 30GHz	Mar. 15, 2011	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 03, 2011	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Oct. 22, 2010	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2010	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 07, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Jan. 06, 2011	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Jan. 06, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz ~ 1 GHz 3m	Jun. 17, 2011	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz ~ 2 GHz	Jan. 25, 2011	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz ~ 26.5 GHz	Aug. 04, 2011	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz ~ 40 GHz	Nov. 17, 2010	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz ~ 1 GHz	Oct. 16, 2010	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1 GHz ~ 18 GHz	May 30, 2011	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz ~ 40 GHz	Jan.13, 2011	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz ~ 1 GHz	Jan. 18, 2011	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz ~ 40 GHz	Jan. 18, 2011	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

**5 TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2010 to January 09, 2013
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 11, 2011

PI, total 24 pages