


ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C

Product: Wireless Charging Pad 5W

MODEL No.: WPC05-1MYOA, F7U107, F7U107-WHT

Trademark: The Belkin logo consists of a dark grey rectangular box containing a white dot matrix icon on the left and the word "belkin" in a lowercase, sans-serif font on the right, followed by a small trademark symbol (TM).

FCC ID: K7SF7U107

REPORT NO.: ES190626049W01

ISSUE DATE: July 09, 2019

*Prepared for*

Belkin International, Inc.  
12045 East Waterfront Dr. Playa Vista, California, United States

*Prepared by*

EMTEK (SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China  
TEL: 86-755-26954280  
FAX: 86-755-26954282

## TABLE OF CONTENT

<b>Test Report Description</b>	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1. Description of Device (EUT) .....	6
2.2. Input / Output Ports.....	6
2.3. Independent Operation Modes .....	7
2.4. Test Manner .....	7
2.5. Description of Test Facility .....	7
2.6. Test Software .....	7
2.7. Description of Support Device .....	8
2.8. Measurement Uncertainty.....	8
<b>3. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>9</b>
3.1. Conducted Emission Test Equipment.....	9
3.2. For 3m Radiated Emission Measurement 9K-30M (3m chamber 1#).....	9
3.3. For 3m Radiated Emission Measurement 30M-1G (3m chamber 1#).....	9
<b>4. 20DB BANDWIDTH .....</b>	<b>10</b>
4.1. Test Procedure.....	10
4.2. Test Results .....	10
<b>5. POWER LINE CONDUCTED EMISSION MEASUREMENT .....</b>	<b>11</b>
5.1. Block Diagram of Test Setup .....	11
5.2. Limits.....	11
5.3. Test Procedure.....	11
5.4. Measuring Results .....	12
<b>6. RADIATED EMISSION TEST.....</b>	<b>15</b>
6.1. Measurement Procedure .....	15
6.2. Test SET-UP (Block Diagram of Configuration).....	15
6.3. Measurement Equipment Used .....	16
6.4. Radiated Emission Limit .....	16
6.5. Measurement Result.....	18

## TEST REPORT DESCRIPTION

Applicant : Belkin International, Inc.  
12045 East Waterfront Dr. Playa Vista, California, United States

Manufacturer : Belkin International, Inc.  
12045 East Waterfront Dr. Playa Vista, California, United States

Factory 1 : SuiChuan CE LINK LIMITED.  
SuiChuan county industrial park east zone, ji'an city, Jiangxi province,  
China.

Factory 2 : CE LINK VIET NAM COMPANY LIMITED  
Lo FJ-25, Song Khe-Noi Hoang Industrial Zone, Noi Hoang Village,  
Yen Dung Town, Bac Giang Province, Vietnam

Trade Mark : 

EUT : Wireless Charging Pad 5W

Model No. : WPC05-1MYOA, F7U107, F7U107-WHT


### We hereby certify that:

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C

The test results of this report relate only to the tested sample identified in this report.

Date of Test : June 27, 2019 to July 09, 2019

Prepared by :   
Yaping Shen/Editor

Reviewer :   
Joe Xia/Supervisor

Approved & Authorized Signer :   
Lisa Wang/Manager



## Modified Information

Version	Report No.	Revision Data	Summary
Ver.1.0	ES190626049W01	/	Original Version

## 1. SUMMARY OF TEST RESULTS

<b>EMISSION</b>		
Description of Test Item	Standard & Limits	Results
Conducted Emission	FCC Part 15, Subpart C- Section 15.207 ANSI C63.10-2013	Pass
Radiated Emission	FCC Part 15, Subpart C- Section 15.209 ANSI C63.10-2013	Pass
Note: N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT	:	Wireless Charging Pad 5W
Model Number	:	WPC05-1MYOA, F7U107, F7U107-WHT (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is the model number. for trading purpose. We prepare WPC05-1MYOA for test.)
Power Rating	:	Input: DC 5V by external power Output: Wireless charging output: DC 5V 1A 5W
Operation Frequency for WPT	:	110KHz-205KHz
Modulation	:	ASK
Antenna Type:	:	Integral Antenna(Induction coil)
Date of Received	:	June 26, 2019
Date of Test	:	June 26, 2019 to July 09, 2019

### 2.2. Input / Output Ports

Port #	Name	Type*	Cable Max. >3m	Cable Shielded	Comments
1	Enclosure	N/E	--	--	None
2	USB input port	DC input	--	--	1 port
* Note: For the purposes of the present document, the following symbols apply: AC AC Power Port DC DC Power Port N/E Non-Electrical I/O Signal Input or Output Port (Not Involved in Process Control) TP Telecommunication Ports					

### 2.3. Independent Operation Modes

- A                    ON
1.                  Wireless(100% load)
  2.                  Wireless(50% load)
  3.                  Wireless(10% load)
- Note:              The mode 1 is the worst mode

### 2.4. Test Manner

Test Items	Test Voltage	Worst Modes
Conducted Emission	AC 120V/60Hz	Mode A.1
Radiated Emission	AC 120V/60Hz	Mode A.1

### 2.5. Description of Test Facility

Site Description

EMC Lab.            : Accredited by CNAS, 2016.10.24  
The certificate is valid until 2022.10.28  
The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19  
The Laboratory has been assessed according to the requirements  
ISO/IEC 17025.

Accredited by FCC, August 06, 2018  
The certificate is valid until August 07, 2020  
Designation Number: CN1204  
Test Firm Registration Number: 882943

Accredited by Industry Canada, November 09, 2018  
The Conformity Assessment Body Identifier is CN0008.

Accredited by A2LA, July 31, 2017  
The Certificate Number is 4321.01.

Name of Firm        : EMTEK (SHENZHEN) CO., LTD.

Site Location        : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China

### 2.6. Test Software

Item                    Software

Conducted Emission : EMTEK(Ver.CON-03A1)-Shenzhen

Radiated Emission   : EMTEK(Ver.RA-03A1)-Shenzhen

## 2.7. Description of Support Device

No.	Equipment	Trade name	Model	S/N	Power Cord
1.	Wireless Load	N/A	5w/7.5w/9w/15w	N/A	N/A

## 2.8. Measurement Uncertainty

Test Item	Uncertainty
Conducted Emission Uncertainty	3.16dB(9k~150kHz Conduction 2#) 2.90dB(150k-30MHz Conduction 2#)
Radiated Emission Uncertainty (3m Chamber)	3.78dB (30M~1GHz Polarize: H) 4.27dB (30M~1GHz Polarize: V) 4.46dB (1~6GHz)



### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/18/2019	05/17/2020
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/18/2019	05/17/2020
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/18/2019	05/17/2020
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/18/2019	05/17/2020
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/18/2019	05/17/2020
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/18/2019	05/17/2020

#### 3.2. For 3m Radiated Emission Measurement 9K-30M (3m chamber 1#)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/18/2019	05/17/2020
Loop Antenna	Schwarzbeck	FMZB 1519	1519-012	05/18/2019	05/17/2020
Cable		3M SF104-26.5	295838/4	05/18/2019	05/17/2020
Cable		6M SF104-26.5	295840/4	05/18/2019	05/17/2020

#### 3.3. For 3m Radiated Emission Measurement 30M-1G (3m chamber 1#)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/18/2019	05/17/2020
Pre-Amplifier	HP	8447F	2944A07999	05/18/2019	05/17/2020
Bilog Antenna	Schwarzbeck	VULB9163	142	05/18/2019	05/17/2020
Cable	Schwarzbeck	AK9513	ACRX1	05/18/2019	05/17/2020
Cable	Rosenberger	N/A	FP2RX2	05/18/2019	05/17/2020
Cable	Schwarzbeck	AK9513	CRPX1	05/18/2019	05/17/2020
Cable	Schwarzbeck	AK9513	CRRX2	05/18/2019	05/17/2020

## 4. 20DB BANDWIDTH

### 4.1. Test Procedure


Set to the maximum power setting and enable the EUT transmit continuously  
 Set RBW = 3kHz.  
 Set the video bandwidth (VBW) =10kHz.  
 Set Span= 20KHz  
 Set Detector = Peak.  
 Set Trace mode = max hold.  
 Set Sweep = auto couple.  
 Measure and record the results in the test report.

### 4.2. Test Results

Temperature: 24 °C  
 Humidity: 53 %


Test Date: July 05, 2019  
 Test By: KK

20dB Band=2.518kHz

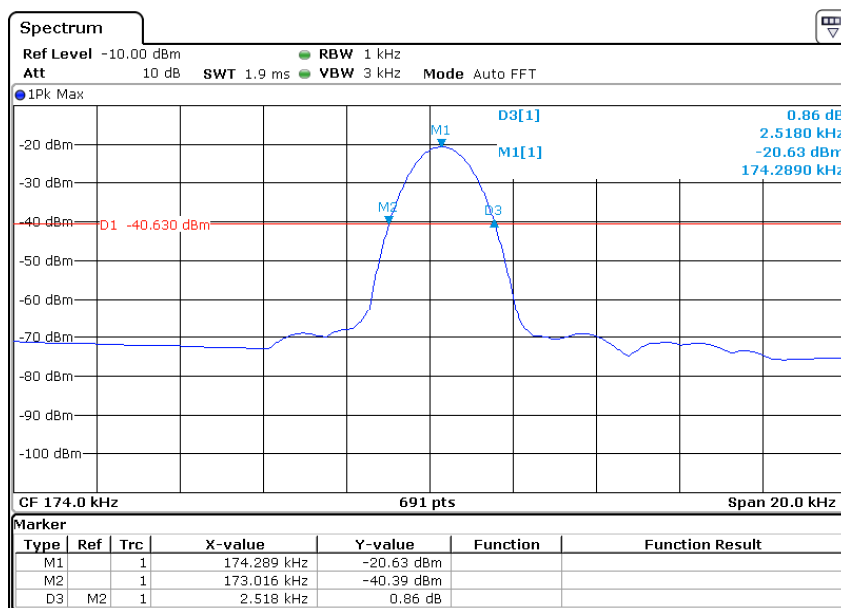

## 5. POWER LINE CONDUCTED EMISSION MEASUREMENT

### 5.1. Block Diagram of Test Setup

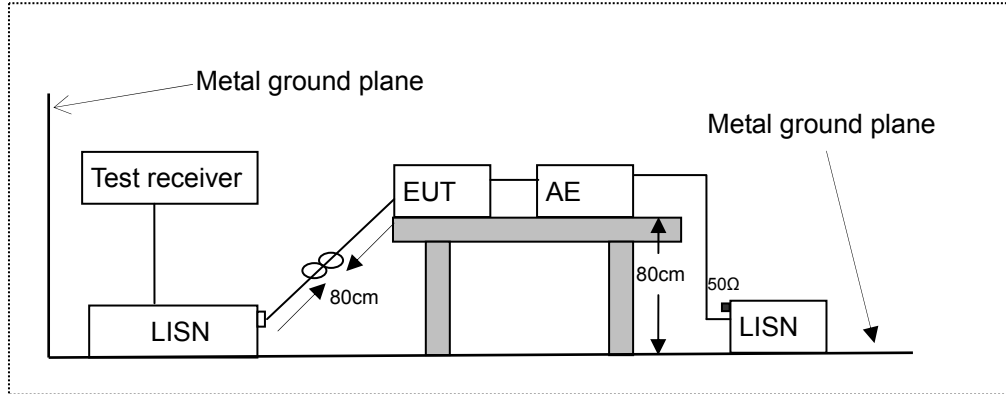

LISN: Line Impedance Stabilization Network  
 AE: Associated equipment  
 EUT: Equipment under test

### 5.2. Limits

FCC Part 15.207

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 5.3. Test Procedure

The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1.5 m x1.0 m.

The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a line impedance stabilization network (LISN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.


Test results were obtained from the following equation:

Emission Level (dB $\mu$ V) = LISN Factor (dB) + Cable Loss (dB) + Reading (dB $\mu$ V)

Margin (dB) = Emission Level (dB $\mu$ V) - Limit (dB $\mu$ V)

#### 5.4. Measuring Results

**PASS.**

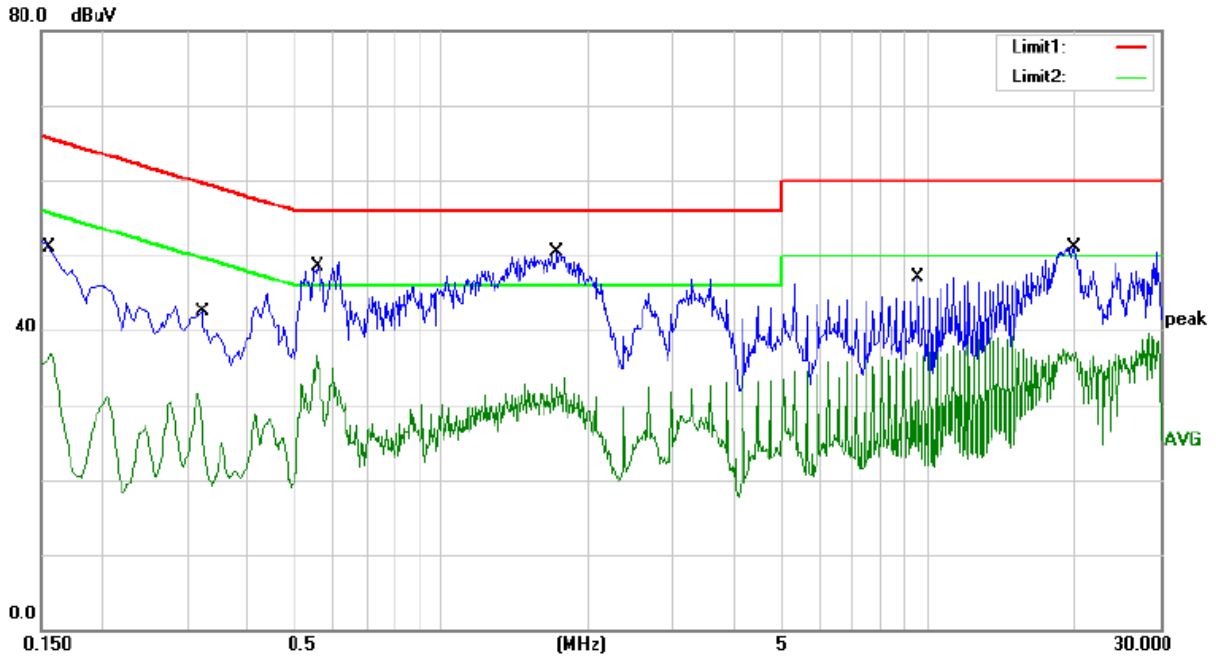

Site Conduction #1

Phase: **L1**

Temperature: 24.9

Limit: (CE)FCC PART 15 C QP


Power: AC 120V/60Hz

Humidity: 54 %

Mode: Wireless Charging(FULL Load)

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1580	41.20	9.62	50.82	65.57	-14.75	QP	
2	0.1580	27.33	9.62	36.95	55.57	-18.62	AVG	
3	0.3220	32.88	9.56	42.44	59.66	-17.22	QP	
4	0.3220	22.02	9.56	31.58	49.66	-18.08	AVG	
5	0.5580	38.97	9.57	48.54	56.00	-7.46	QP	
6	0.5580	27.05	9.57	36.62	46.00	-9.38	AVG	
7 *	1.7340	40.88	9.59	50.47	56.00	-5.53	QP	
8	1.7340	24.04	9.59	33.63	46.00	-12.37	AVG	
9	9.5100	37.25	9.78	47.03	60.00	-12.97	QP	
10	9.5100	27.27	9.78	37.05	50.00	-12.95	AVG	
11	20.0020	40.90	10.18	51.08	60.00	-8.92	QP	
12	20.0020	27.07	10.18	37.25	50.00	-12.75	AVG	

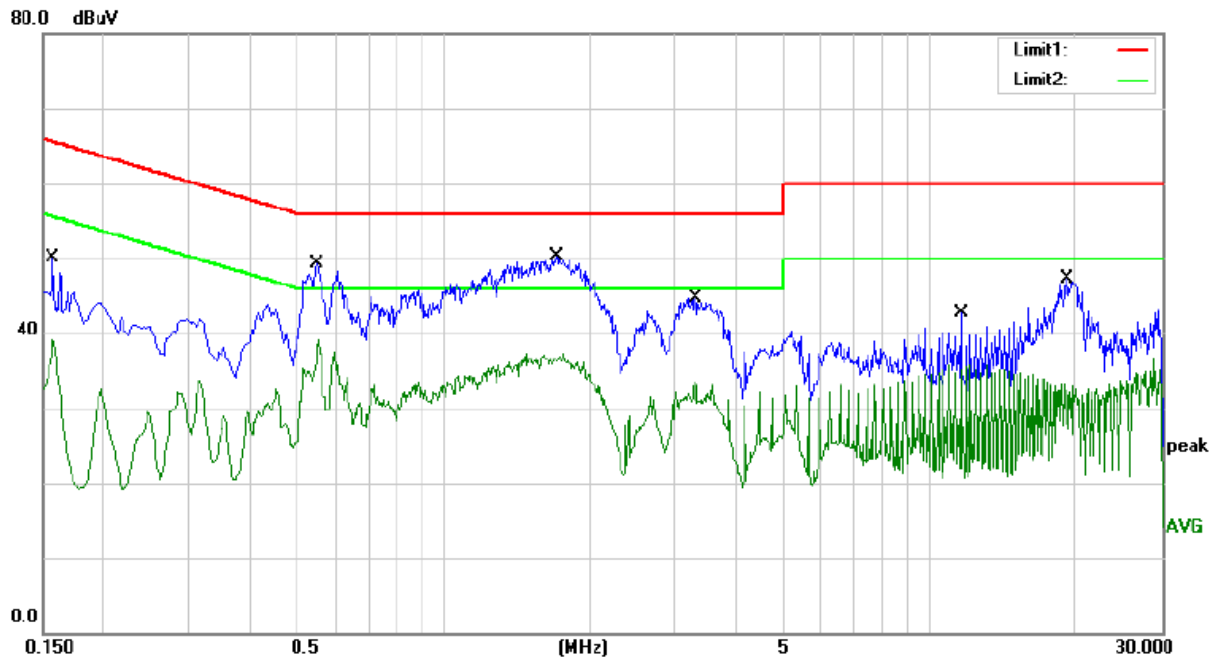

Site Conduction #1 Phase: **N** Temperature: 24.9  
 Limit: (CE)FCC PART 15 C\_QP Power: AC 120V/60Hz Humidity: 54 %  
 Mode: Wireless Charging(FULL Load)  
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1580	40.48	9.62	50.10	65.57	-15.47	QP	
2	0.1580	29.49	9.62	39.11	55.57	-16.46	AVG	
3	0.5500	39.73	9.57	49.30	56.00	-6.70	QP	
4	0.5500	29.45	9.57	39.02	46.00	-6.98	AVG	
5 *	1.7100	40.72	9.59	50.31	56.00	-5.69	QP	
6	1.7100	27.63	9.59	37.22	46.00	-8.78	AVG	
7	3.3100	34.98	9.63	44.61	56.00	-11.39	QP	
8	3.3100	23.92	9.63	33.55	46.00	-12.45	AVG	
9	11.5900	32.91	9.82	42.73	60.00	-17.27	QP	
10	11.5900	25.71	9.82	35.53	50.00	-14.47	AVG	
11	19.1620	37.17	10.14	47.31	60.00	-12.69	QP	
12	19.1620	23.15	10.14	33.29	50.00	-16.71	AVG	


## 6. RADIATED EMISSION TEST

### 6.1. Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. Use the following receiver/spectrum analyzer settings:  
 Span = wide enough to fully capture the emission being measured  
 RBW=200Hz for 9KHz to 150KHz,  
 RBW=9kHz for 150KHz to 30MHz,  
 RBW=120KHz for 30MHz to 1GHz  
 VBW  $\geq$  3\*RBW  
 Sweep = auto  
 Detector function = QP  
 Trace = max hold

### 6.2. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

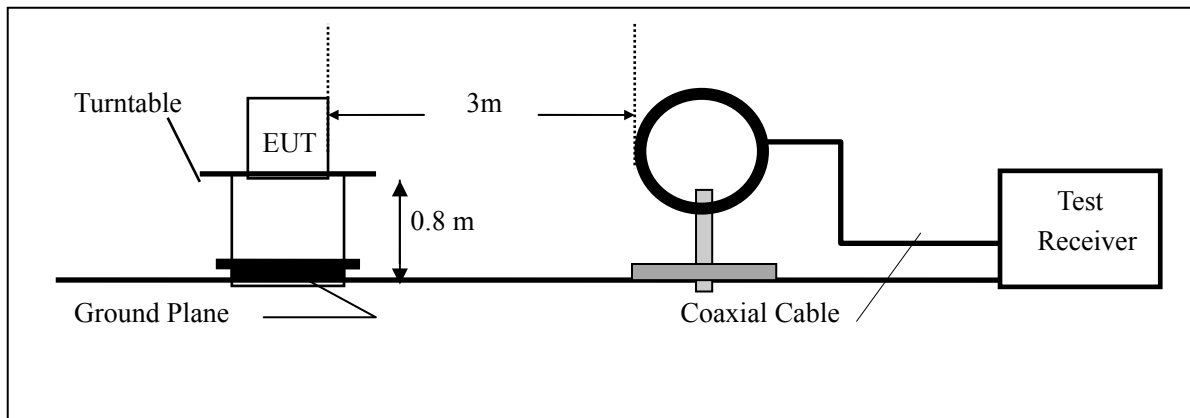

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

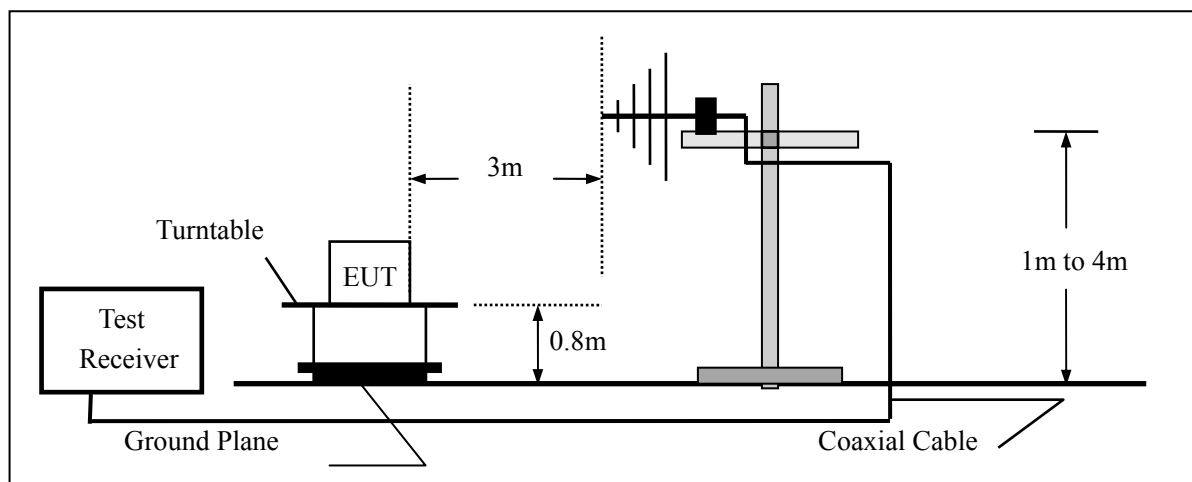

### 6.3. Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/18/2019	05/17/2020
Pre-Amplifier	HP	8447D	2944A07999	05/18/2019	05/17/2020
Bilog Antenna	Schwarzbeck	VULB9163	142	05/18/2019	05/17/2020
Loop Antenna	ARA	PLA-1030/B	1029	05/18/2019	05/17/2020
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/18/2019	05/17/2020
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/18/2019	05/17/2020
Cable	Schwarzbeck	AK9513	ACRX1	05/18/2019	05/17/2020
Cable	Rosenberger	N/A	FP2RX2	05/18/2019	05/17/2020
Cable	Schwarzbeck	AK9513	CRPX1	05/18/2019	05/17/2020
Cable	Schwarzbeck	AK9513	CRRX2	05/18/2019	05/17/2020

### 6.4. Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500




## 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
  2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205, and the emissions located in restricted bands also comply with 15.209 limit.



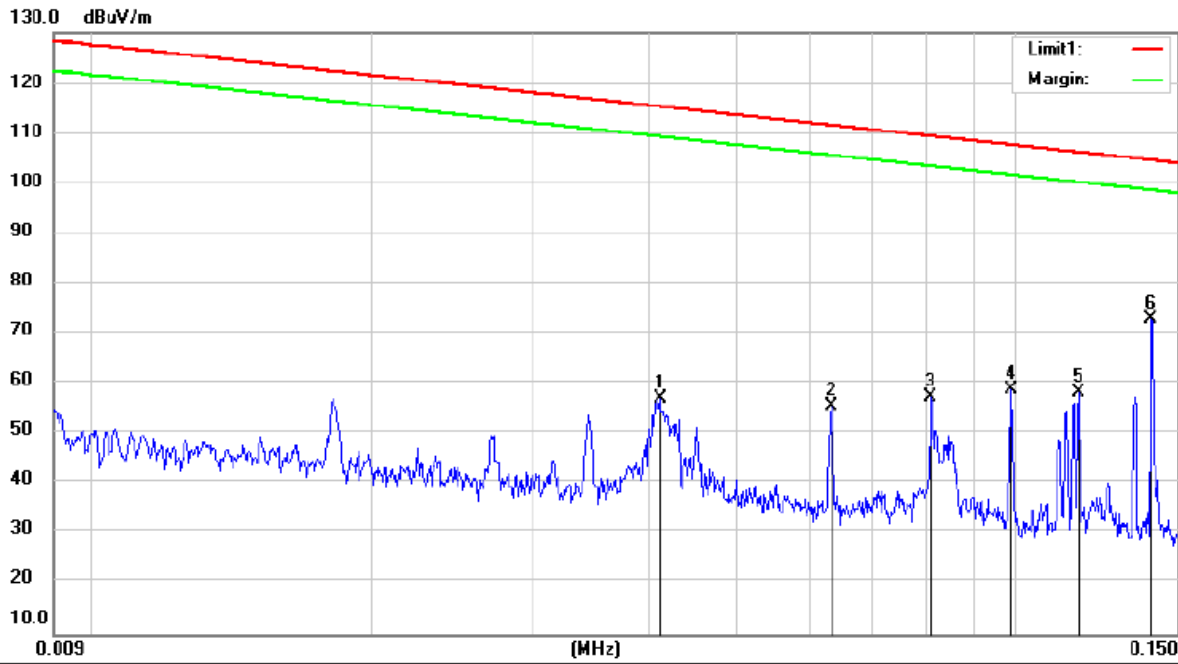

Site 3m Chamber #1

Polarization: Y

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: AC 120V/60Hz

Humidity: 48 %

Mode: Wireless Charging(Full Load)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0411	36.00	21.00	57.00	115.32	-58.32	QP		
2		0.0631	34.74	20.73	55.47	111.59	-56.12	QP		
3		0.0810	36.82	20.47	57.29	109.43	-52.14	QP		
4		0.0991	37.80	20.83	58.63	107.67	-49.04	QP		
5		0.1171	37.42	20.85	58.27	106.23	-47.96	QP		
6	*	0.1406	51.90	20.85	72.75	104.64	-31.89	QP		

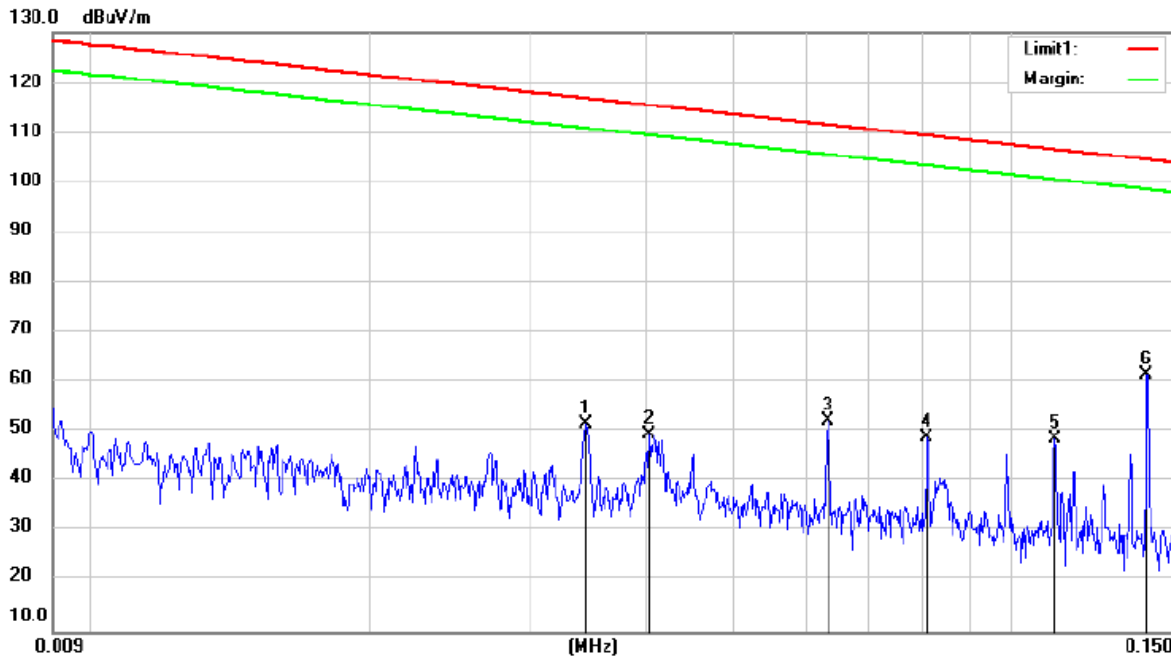

Site 3m Chamber #1

Polarization: **Z**

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)

Power: AC 120V/60Hz


Humidity: 48 %

Mode: Wireless Charging(Full Load)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0343	30.72	20.89	51.61	116.89	-65.28	QP		
2		0.0401	28.33	20.98	49.31	115.53	-66.22	QP		
3		0.0630	31.45	20.73	52.18	111.61	-59.43	QP		
4		0.0810	28.30	20.47	48.77	109.43	-60.66	QP		
5		0.1116	27.60	20.85	48.45	106.64	-58.19	QP		
6	*	0.1406	40.72	20.85	61.57	104.64	-43.07	QP		

150KHz-30MHz:

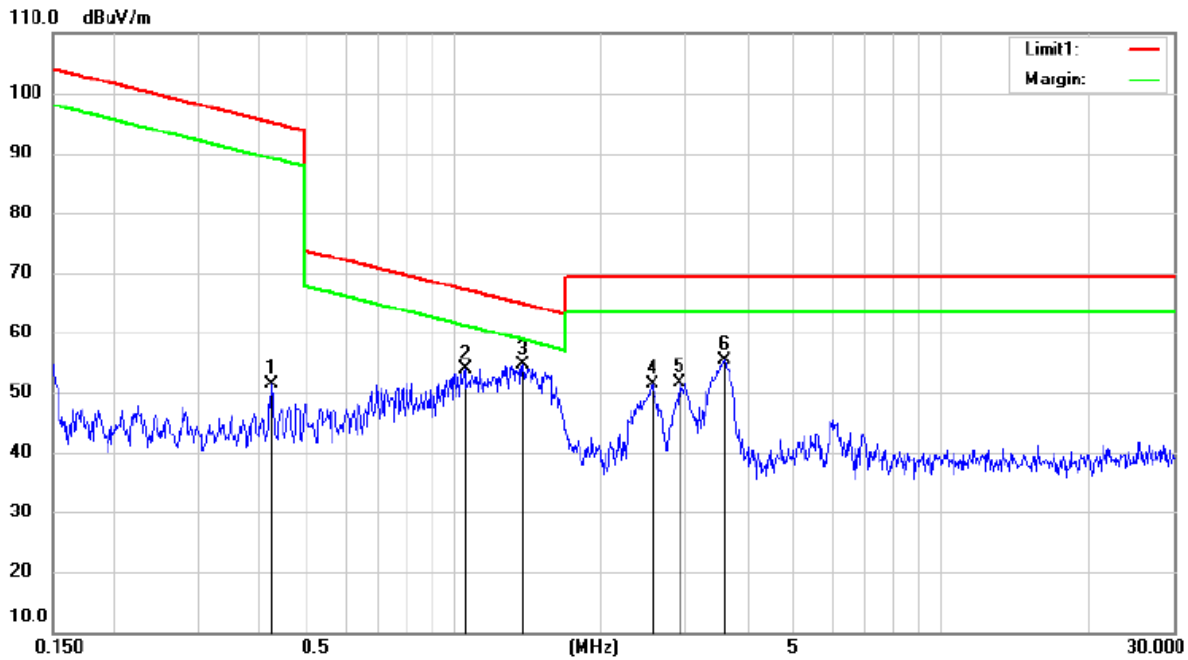

Site 3m Chamber #1

Polarization: X

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)


Power: AC 120V/60Hz

Humidity: 48 %

Mode: Wireless Charging(Full Load)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		0.4215	30.43	21.05	51.48	95.11	-43.63	QP		
2		1.0541	32.93	20.94	53.87	67.17	-13.30	QP		
3	*	1.3810	33.73	20.85	54.58	64.83	-10.25	QP		
4		2.5535	30.84	20.51	51.35	69.50	-18.15	QP		
5		2.8998	31.29	20.41	51.70	69.50	-17.80	QP		
6		3.5843	34.96	20.39	55.35	69.50	-14.15	QP		

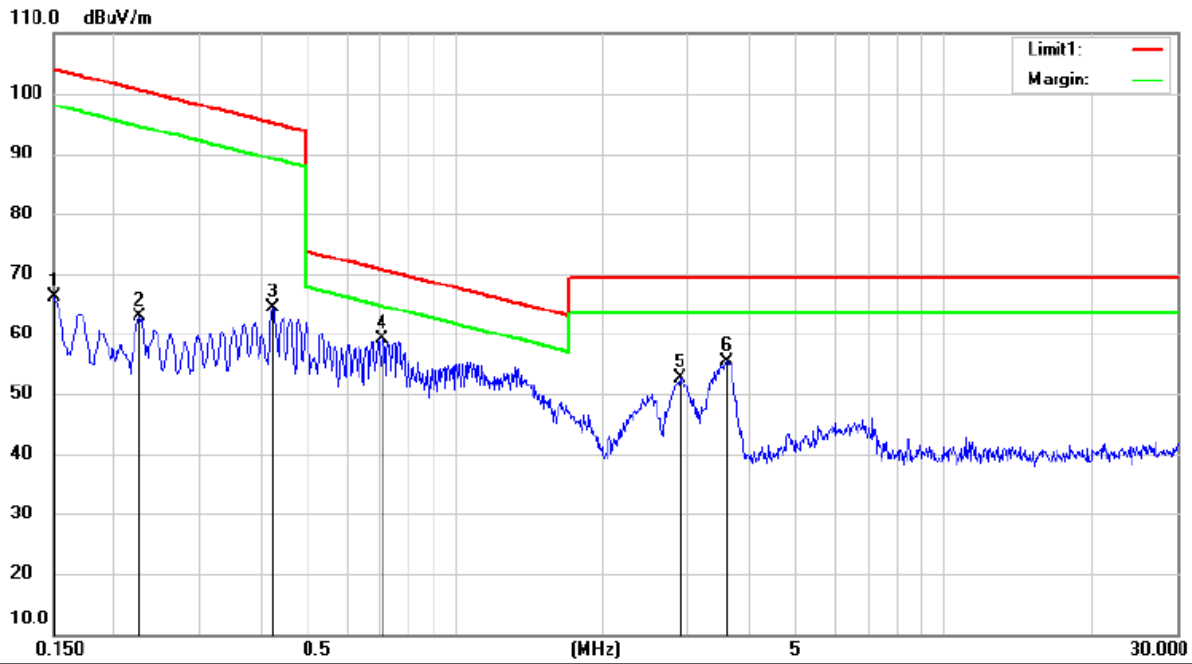

Site 3m Chamber #1

Polarization: Y

Temperature: 29.5 C

Limit: (RE)FCC PART 15.209(9K-30M)

Power: AC 120V/60Hz

Humidity: 48 %


Mode: Wireless Charging(Full Load)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		0.1500	45.21	20.85	66.06	104.08	-38.02	QP			
2		0.2244	41.93	21.00	62.93	100.58	-37.65	QP			
3		0.4215	43.34	21.05	64.39	95.11	-30.72	QP			
4	*	0.7084	38.15	20.98	59.13	70.61	-11.48	QP			
5		2.8845	32.32	20.41	52.73	69.50	-16.77	QP			
6		3.5843	35.03	20.39	55.42	69.50	-14.08	QP			



## 30MHz-1GHz:

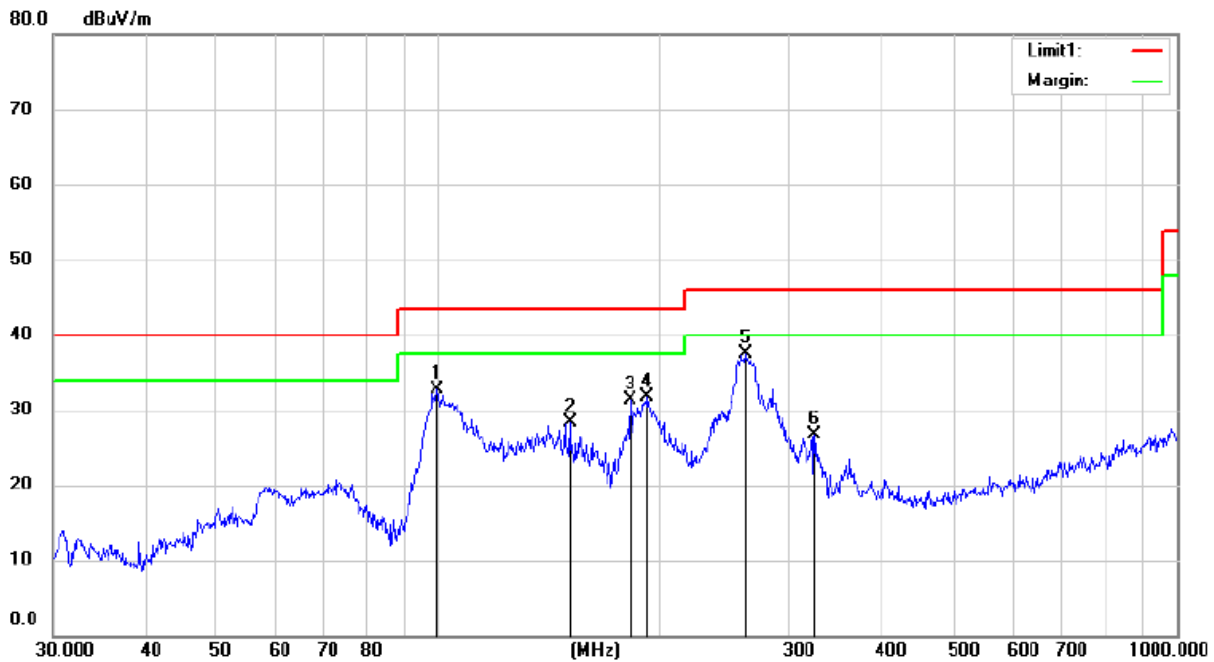

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 25.1 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz


Humidity: 38 %

Mode: Wireless Charging(Full Load)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		99.5281	64.06	-31.40	32.66	43.50	-10.84			QP
2		150.6962	62.55	-34.24	28.31	43.50	-15.19			QP
3		182.4311	63.42	-32.21	31.21	43.50	-12.29			QP
4		191.8121	62.56	-30.95	31.61	43.50	-11.89			QP
5	*	260.1444	66.78	-29.21	37.57	46.00	-8.43			QP
6		323.6605	54.19	-27.49	26.70	46.00	-19.30			QP



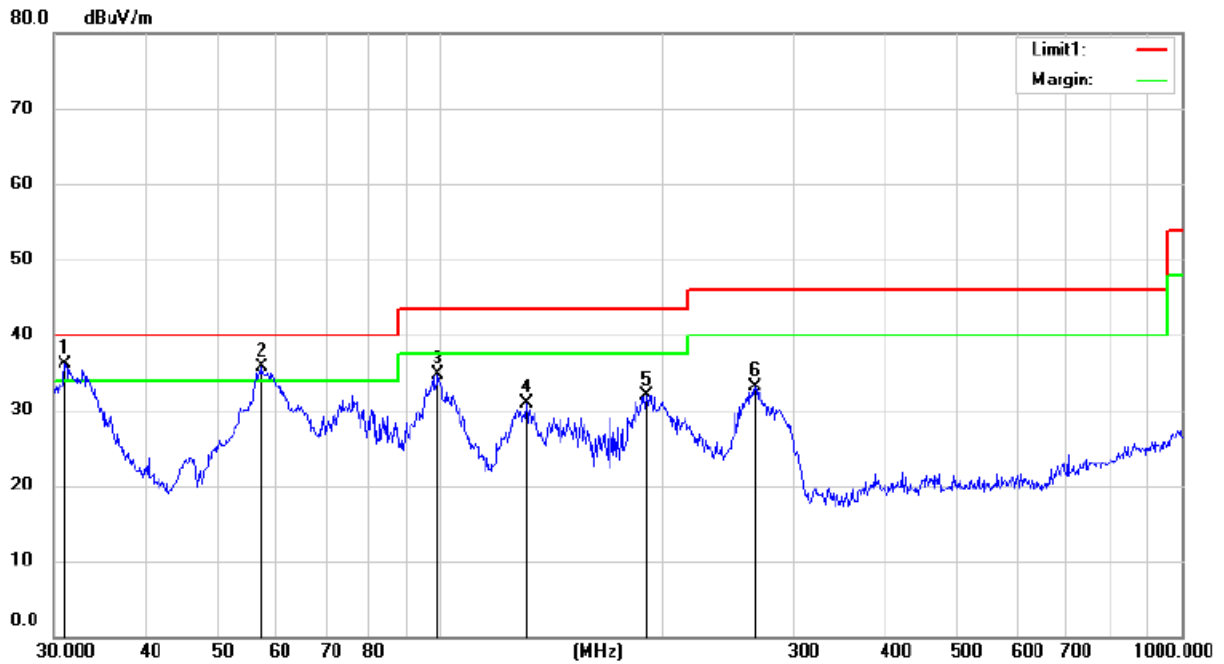

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 25.1 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 38 %

Mode: Wireless Charging(Full Load)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	31.1361	68.74	-32.69	36.05	40.00	-3.95			QP
2	!	57.3521	67.38	-31.61	35.77	40.00	-4.23			QP
3		99.3190	66.26	-31.46	34.80	43.50	-8.70			QP
4		130.6075	63.77	-32.90	30.87	43.50	-12.63			QP
5		190.2715	63.05	-31.08	31.97	43.50	-11.53			QP
6		266.1420	61.57	-28.43	33.14	46.00	-12.86			QP

-----The end-----