



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw


Project No: CB10506095

## Maximum Permissible Exposure Report

Applicant's company	Belkin International, Inc.
Applicant Address	12045 East Waterfront Drive, Playa Vista, CA 90094
FCC ID	K7SF9K1102V2

Product Name	N600 DB Wireless N+ Router
Brand Name	belkin
Model No.	F9K1102V4
Ref. Standard(s)	47 CFR FCC Part 2 Subpart J, section 2.1091
Received Date	Mar. 04, 2016
Final Test Date	Jun. 06, 2016
Submission Type	Class II Change



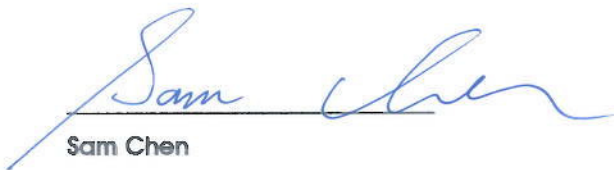

Sam Chen  
SPORTON INTERNATIONAL INC.



## Table of Contents

<b>1. GENERAL DESCRIPTION.....</b>	<b>1</b>
1.1. EUT General Information .....	1
1.2. Table for Class II Change .....	2
1.3. Testing Location.....	2
<b>2. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>3</b>
2.1. Limit of Maximum Permissible Exposure .....	3
2.2. MPE Calculation Method .....	3
2.3. Calculated Result and Limit.....	4



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA4N1172-29	Rev. 01	Initial issue of report	Jun. 22, 2016

## 1. GENERAL DESCRIPTION

### 1.1. EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)

### 1.2. Table for Class II Change

This product is an extension of original one reported under Sporton project number: 241874

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding a new power adapter (Model Name: MU12AR120100-A1). 2. Updating the flash memory. 3. Adding RJ-45 Cable 4. Updating brand name to "belkin" from "Belkin". 5. Updating model name to "F9K1102V4" from "F9K1102V2". 6. Updating applicant to applicant address to "12045 East Waterfront Drive, Playa Vista, CA 90094 " from "12045 E. Waterfront Drive Playa Viste, CA 90094, USA". 7. Removing two adapters (Model No.: DSA-12PFE-12 BUS 120100 and Model No.: SYS1381-1212-W2).	It is not necessary to perform for all tests.
8. Updating Band 1 to "New Rules " from "Old Rules". 9. Updating test rule of 5GHz band 4 to "15.407 (b)(4)(i) of New Rules (ET Docket No. 13-49; FCC 16-24)" from "Old Rules".	Maximum Permissible Exposure Report

Note: Maximum Permissible Exposure of 2.4GHz Band is based on original test report.

### 1.3. Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456      FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065      FAX : 886-3-656-9085

## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2. MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

### 2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For 5GHz Band:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11n MCS8 HT40: 20.78 dBm

Distance (cm)	Test Freq. (MHz)	Directional Gain (dBi)	Antenna Gain (numeric)	The maximum combined average Output Power		Power Density (S) (mW/cm <sup>2</sup> )	Limit of Power Density (S) (mW/cm <sup>2</sup> )	Test Result
				(dBm)	(mW)			
20	5230	5.50	3.5481	20.7820	119.7280	0.084556	1	Complies

**Note:** 
$$Directional\ Gain = 10 \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

For 2.4GHz Band:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11n MCS8 HT20: 25.44 dBm

Distance (cm)	Test Freq. (MHz)	Directional Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm <sup>2</sup> )	Limit of Power Density (S) (mW/cm <sup>2</sup> )	Test Result
				(dBm)	(mW)			
20	2412	3.80	2.3988	25.4436	350.2331	0.167227	1	Complies

**Note:** 
$$Directional\ Gain = 10 \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

#### Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is  $0.1671 / 1 + 0.0845 / 1 = 0.2516$ , which is less than "1". This confirmed that the device complies.