


## Appendix D. Radiated Emission Co-location Report

# 1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	68%
Test Engineer	Taka Hsu / Magic Lai	Configurations	2.4GHz + 5GHz

## Horizontal

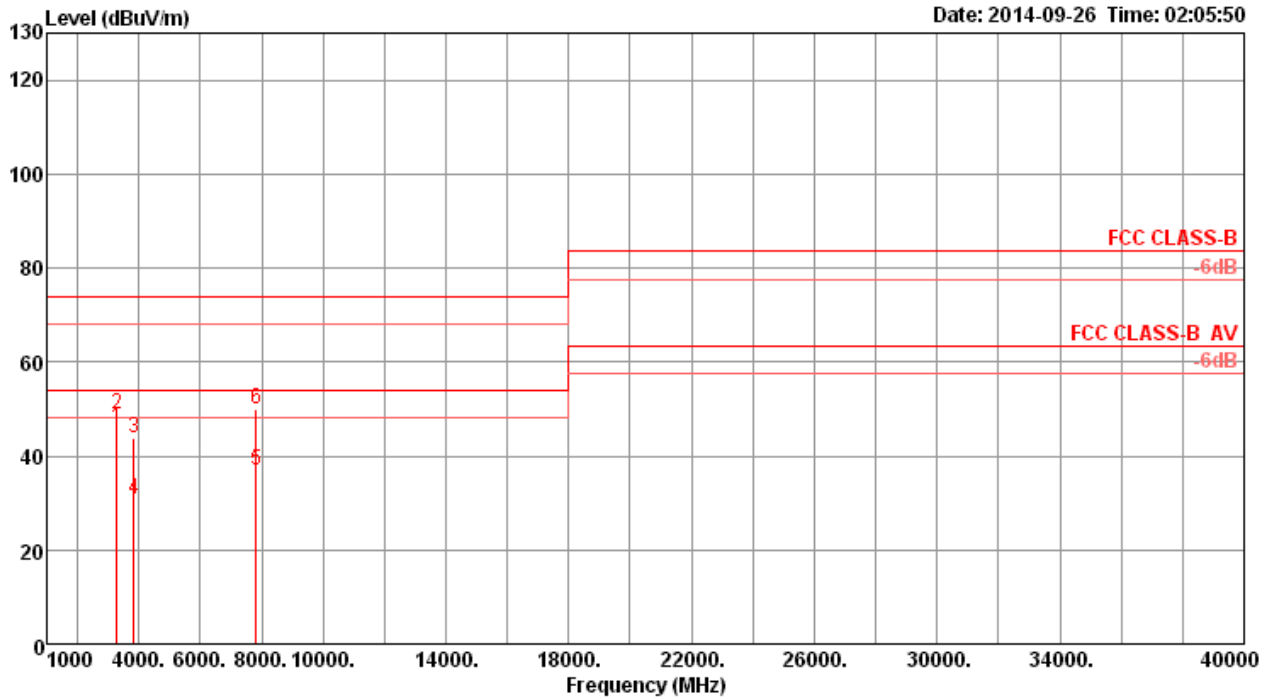

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	3282.58	45.99	54.00	-8.01	45.85	4.89	30.45	35.20	Average	103	218	HORIZONTAL
2	3282.61	49.03	74.00	-24.97	48.89	4.89	30.45	35.20	Peak	103	218	HORIZONTAL
3	3829.22	43.81	74.00	-30.19	41.64	5.29	32.08	35.20	Peak	132	345	HORIZONTAL
4	3833.13	30.76	54.00	-23.24	28.51	5.31	32.14	35.20	Average	132	345	HORIZONTAL
5	7815.57	37.06	54.00	-16.94	28.31	7.33	36.92	35.50	Average	100	128	HORIZONTAL
6	7815.73	49.94	74.00	-24.06	41.19	7.33	36.92	35.50	Peak	100	128	HORIZONTAL

Vertical

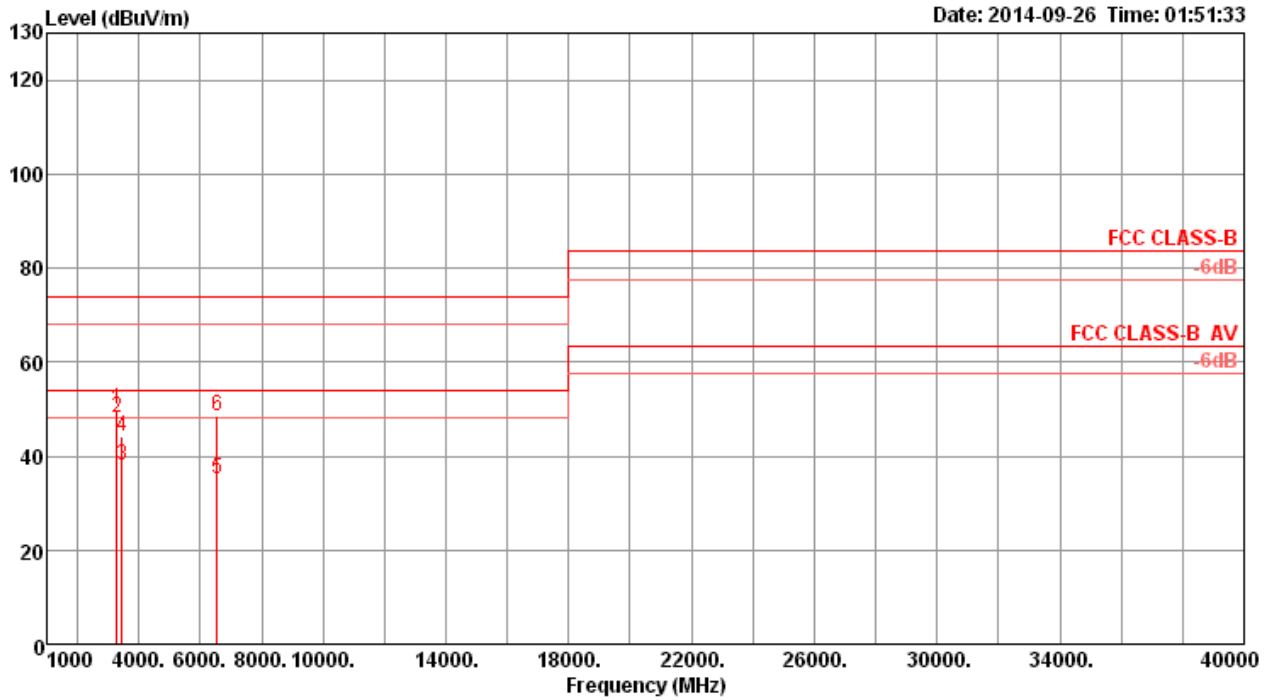

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB	dB/m	dB		cm	deg	
1	3282.61	49.87	74.00	-24.13	49.73	4.89	30.45	35.20	Peak	141	121	VERTICAL
2	3282.69	48.04	54.00	-5.96	47.90	4.89	30.45	35.20	Average	141	121	VERTICAL
3	3453.34	37.88	54.00	-16.12	37.27	5.01	30.80	35.20	Average	162	139	VERTICAL
4	3453.42	44.00	74.00	-30.00	43.39	5.01	30.80	35.20	Peak	162	139	VERTICAL
5	6552.31	35.22	54.00	-18.78	28.66	6.76	35.10	35.30	Average	100	360	VERTICAL
6	6555.70	48.58	74.00	-25.42	42.02	6.76	35.10	35.30	Peak	100	360	VERTICAL