



# SPORTON International Inc.

No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.  
Ph: 886-3-656-9065 / FAX: 886-3-656-9085 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>Belkin International inc.</b>
Applicant Address	12045 East Waterfront Drive, Playa Vista, CA 90094, USA
FCC ID	<b>K7SF9K1115V2</b>

Product Name	AC1750 DB Wi-Fi Dual-Band AC+ Gigabit Router
Brand Name	Belkin
Model No.	F9K1115V2
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Apr. 25, 2013
Final Test Date	Jun. 19, 2013
Submission Type	Original Equipment
Operating Mode	Master

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03 and KDB 662911 D01 v02**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. EUT Operation during Test .....	10
3.10. Duty Cycle.....	11
3.11. Test Configurations .....	13
<b>4. TEST RESULT .....</b>	<b>15</b>
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement.....	19
4.3. Maximum Conducted Output Power Measurement.....	28
4.4. Power Spectral Density Measurement .....	31
4.5. Peak Excursion Measurement.....	37
4.6. Radiated Emissions Measurement .....	42
4.7. Band Edge Emissions Measurement .....	57
4.8. Frequency Stability Measurement .....	63
4.9. Antenna Requirements .....	65
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>66</b>
<b>6. TEST LOCATION.....</b>	<b>68</b>
<b>7. MEASUREMENT UNCERTAINTY.....</b>	<b>69</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A5</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>
<b>APPENDIX C. CO-LOCATION REPORT.....</b>	<b>C1 ~ C3</b>



## History of This Test Report



## 1. CERTIFICATE OF COMPLIANCE

Product Name : AC1750 DB Wi-Fi Dual-Band AC+ Gigabit Router  
Brand Name : Belkin  
Model No. : F9K1115V2  
Applicant : Belkin International inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 25, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'.

Sam Chen  
SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	17.48 dB
4.2	15.407(a)	26dB Spectrum Bandwidth & 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.02 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.49 dB
4.5	15.407(a)	Peak Excursion	Complies	0.98 dB
4.6	15.407(b)	Radiated Emissions	Complies	7.16 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.01 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (20MHz): 17.76MHz ; 802.11ac MCS0/Nss1 (40MHz): 38.08 MHz ; 802.11ac MCS0/Nss1 (80MHz): 75.60 MHz
Maximum Conducted Output Power	802.11ac MCS0/Nss1 (20MHz): 15.86 dBm ; 802.11ac MCS0/Nss1 (40MHz): 15.94 dBm ; 802.11ac MCS0/Nss1 (80MHz): 15.97 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11a**

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	11a: 4
Channel Band Width (99%)	11a: 17.12 MHz
Maximum Conducted Output Power	11a: 15.92 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

## IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	M0-23
802.11n (HT40)	3	M0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.  
 Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.  
 Note 3: Modulation modes consist of below configuration:  
 11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

## 3.2. Accessories

Power	Brand	Model	Rating
Adapter	belkin	DSA-30PFB-12 FUS 120250	Input: 100-240V~50/60Hz 0.8A Output: +12V, 2.5A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Airgain	N2420S-T10-B100S2	PCB Antenna	I-PEX	3.4	-
2	Airgain	N2420S-T10-W50S2	PCB Antenna	I-PEX	3.9	-
3	Airgain	N2420S-T10-G190S2	PCB Antenna	I-PEX	4.4	-
4	Airgain	N5x20B-T1-B150U	PCB Antenna	I-PEX	-	5.8
5	Airgain	N5x20B-T-G65U	PCB Antenna	I-PEX	-	5.3
6	Airgain	N5x20B-T-W85U	PCB Antenna	I-PEX	-	5.3

<For 2.4GHz Band>

For IEEE 802.11b/g/n mode (3TX/3RX):

Ant.1 and Ant.2 and Ant. 3 can be used as transmitting/receiving antennas.


Ant.1 and Ant.2 and Ant. 3 could transmit/receive simultaneously.

<For 5GHz Band>

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant.4 and Ant.5 and Ant. 6 can be used as transmitting/receiving antennas.

Ant.4 and Ant.5 and Ant. 6 could transmit/receive simultaneously.

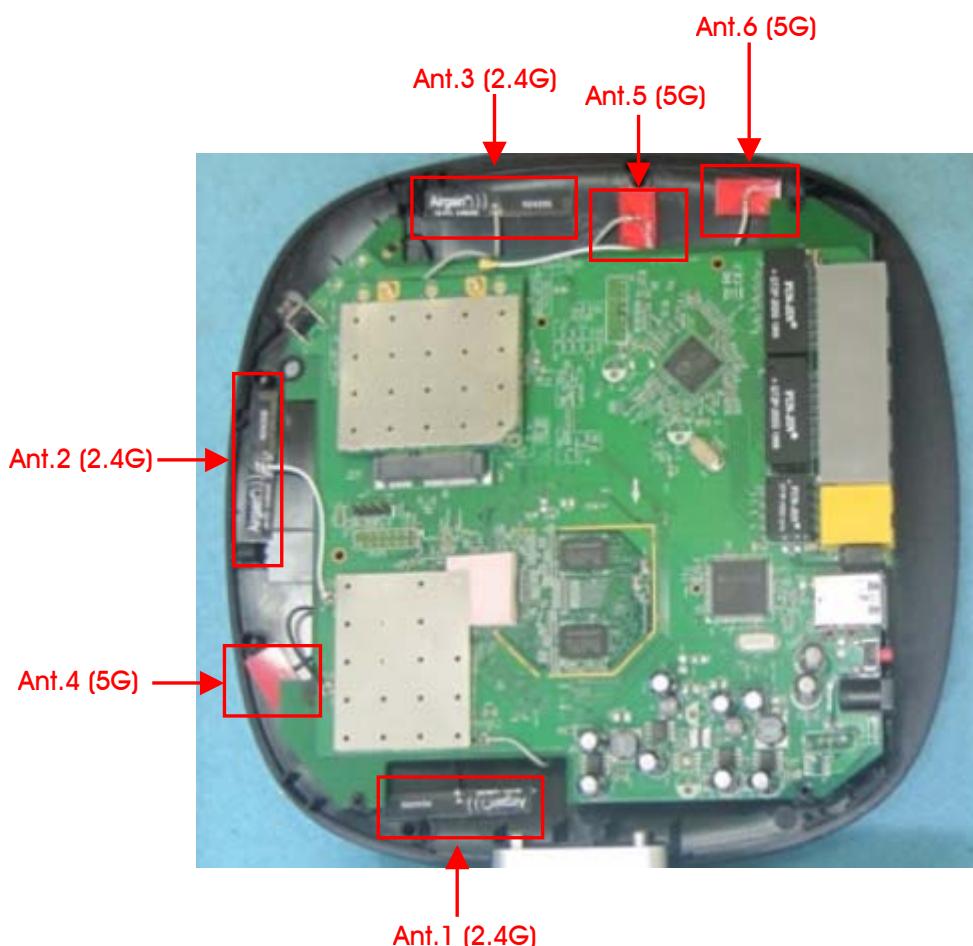

### 3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal link		-	-	-
Max. Conducted Output Power	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	4+5+6
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	4+5+6
	11ac 80MHz	Band 1	MCS0/Nss1	42	4+5+6
	11a	Band 1	6Mbps	36/40/48	4+5+6
Power Spectral Density	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	4+5+6
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	4+5+6
	11ac 80MHz	Band 1	MCS0/Nss1	42	4+5+6
	11a	Band 1	6Mbps	36/40/48	4+5+6
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	4+5+6
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	4+5+6
	11ac 80MHz	Band 1	MCS0/Nss1	42	4+5+6
	11a	Band 1	6Mbps	36/40/48	4+5+6
Peak Excursion	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	4+5+6
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	4+5+6
	11ac 80MHz	Band 1	MCS0/Nss1	42	4+5+6
	11a	Band 1	6Mbps	36/40/48	4+5+6
Radiated Emission Below 1GHz	Normal link		-	-	-
Radiated Emission Above 1GHz	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	4+5+6
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	4+5+6
	11ac 80MHz	Band 1	MCS0/Nss1	42	4+5+6
	11a	Band 1	6Mbps	36/40/48	4+5+6
Band Edge Emission	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	4+5+6
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	4+5+6
	11ac 80MHz	Band 1	MCS0/Nss1	42	4+5+6
	11a	Band 1	6Mbps	36/40/48	4+5+6
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Stand of EUT with AC Adapter

**For Radiated Emission test:**

Mode 1. Stand of EUT with AC Adapter

**<For MPE and Co-location Test>:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC);Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

< AC Power Line Conduction Emissions and Radiation Emissions<30MHz~1GHz> >:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	M1340	E2K4965AGNM
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	D420	E2KWM3945ABG
USB HDD	AACOM	F12	DoC
Flash Disk	Silicon	I-Series	DoC

< Radiation Emissions< above 1GHz > >:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE

< TH-01 >:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 20MHz

Test Software Version	art2 ver4.9.93		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	10.5	10.5	10.5

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 40MHz

Test Software Version	art2 ver4.9.93	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	11	11

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 80MHz

Test Software Version	art2 ver4.9.93	
Frequency	5210 MHz	
MCS0 80MHz	11	

#### Power Parameters of IEEE 802.11a


Test Software Version	art2 ver4.9.93		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a	10.5	10.5	10.5

### 3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


### 3.10.Duty Cycle

#### IEEE 802.11ac MCS0/Nss1 20MHz

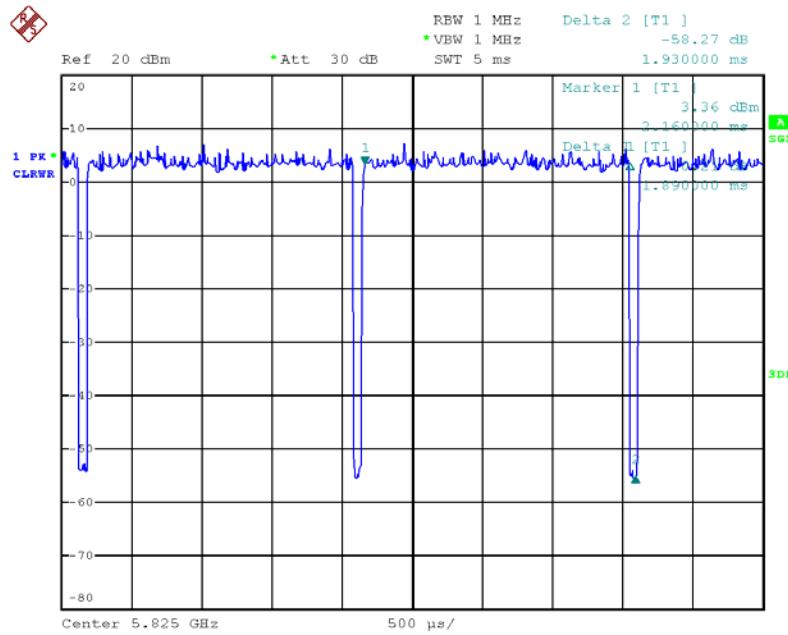


Date: 19.JUN.2013 03:53:44

#### IEEE 802.11ac MCS0/Nss1 40MHz

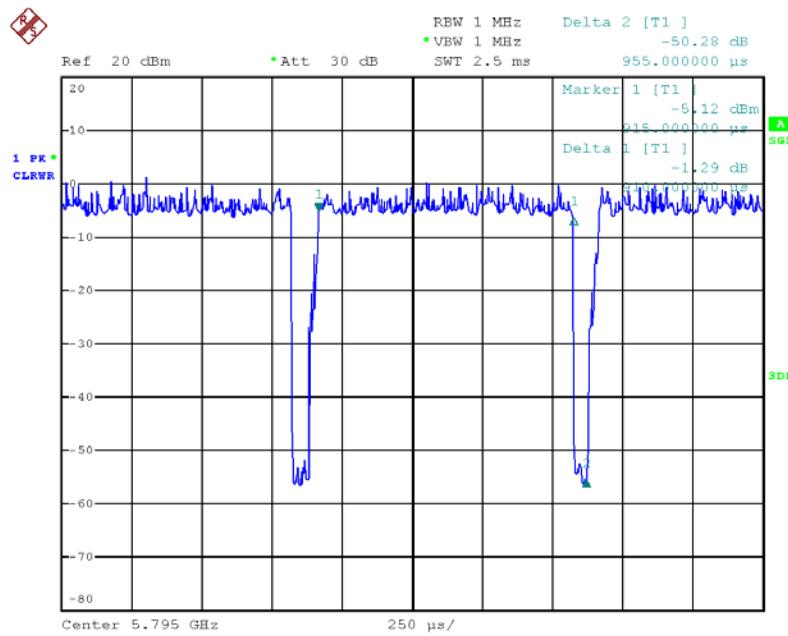


Date: 19.JUN.2013 03:55:50

## IEEE 802.11ac MCS0/Nss1 80MHz

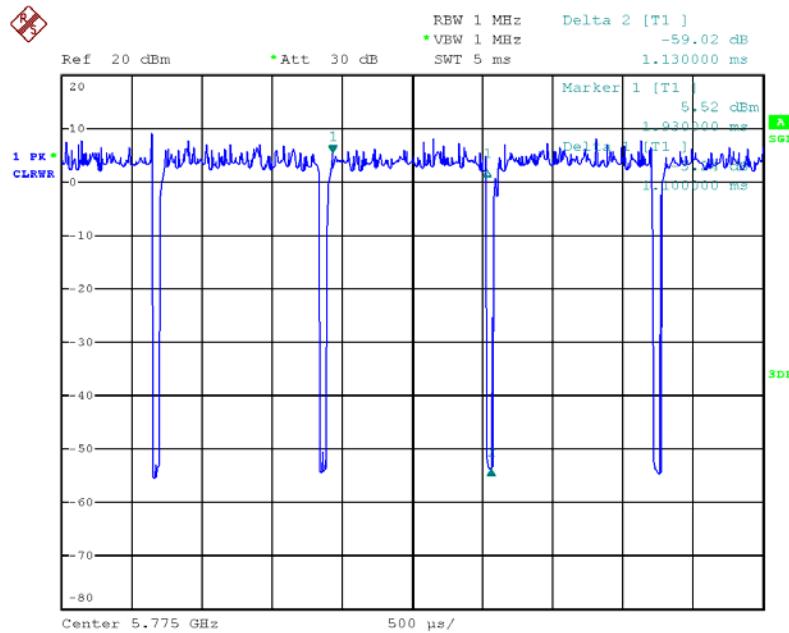

Date: 19.JUN.2013 03:50:58


## IEEE 802.11a

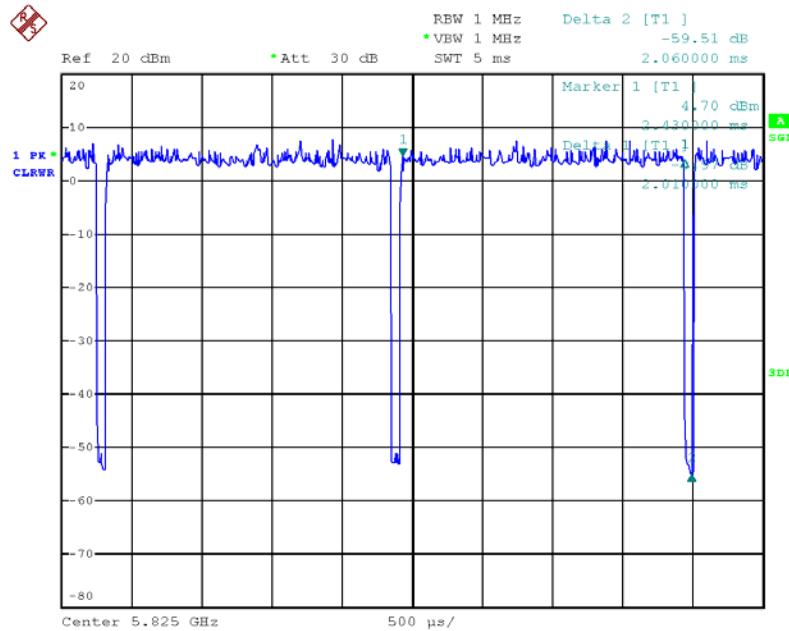

Date: 19.JUN.2013 03:52:43


### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions and Radiation Emissions<30MHz~1GHz>Test Configuration

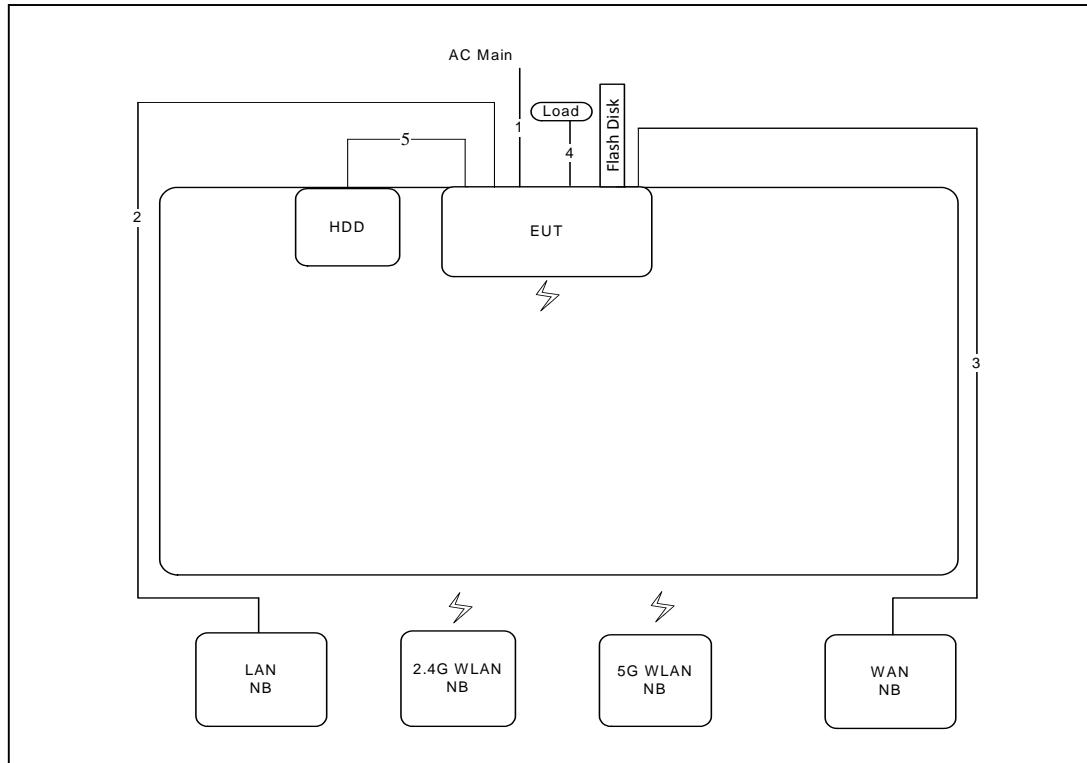

Item	Connection	Shielded	Length
1	Power cable	No	1.55m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	0.6m
5	USB cable	Yes	0.5m

### 3.11.2. Radiation Emissions <above 1GHz>Test Configuration

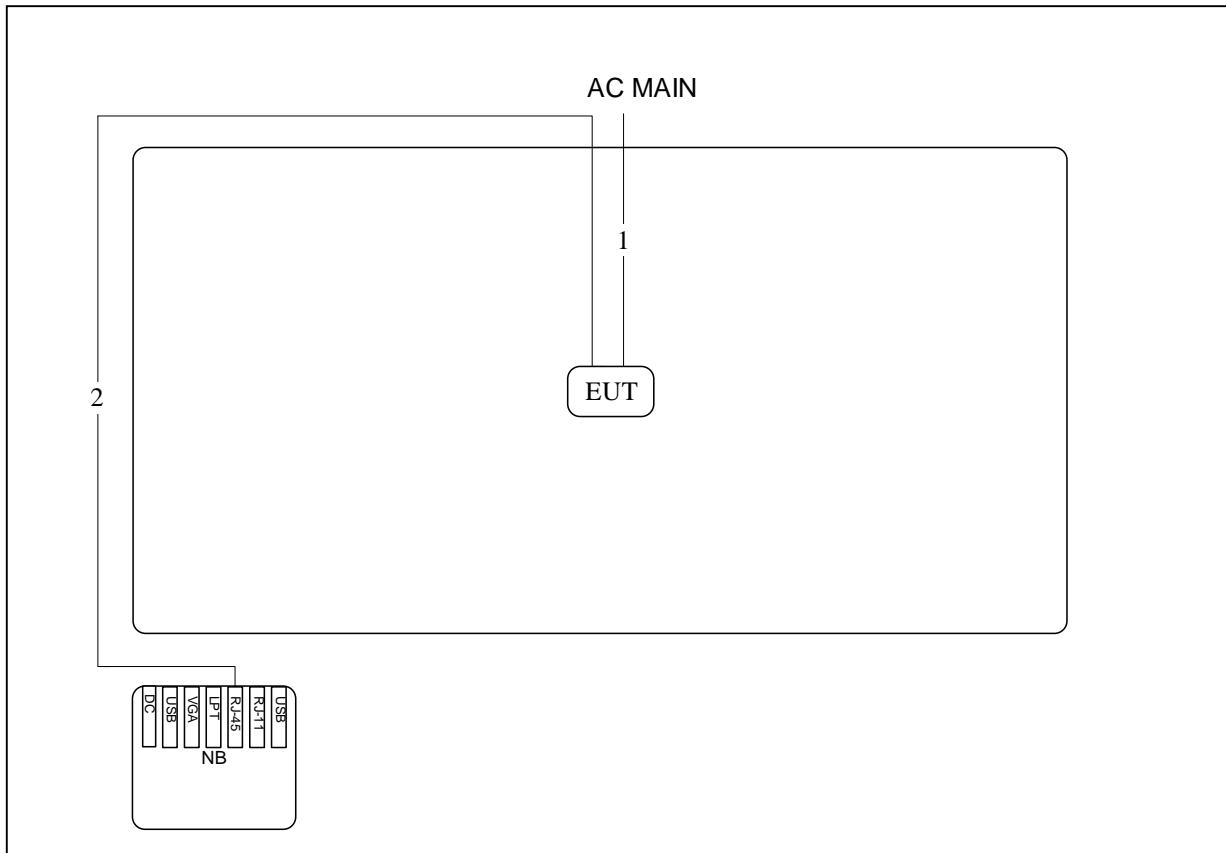

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

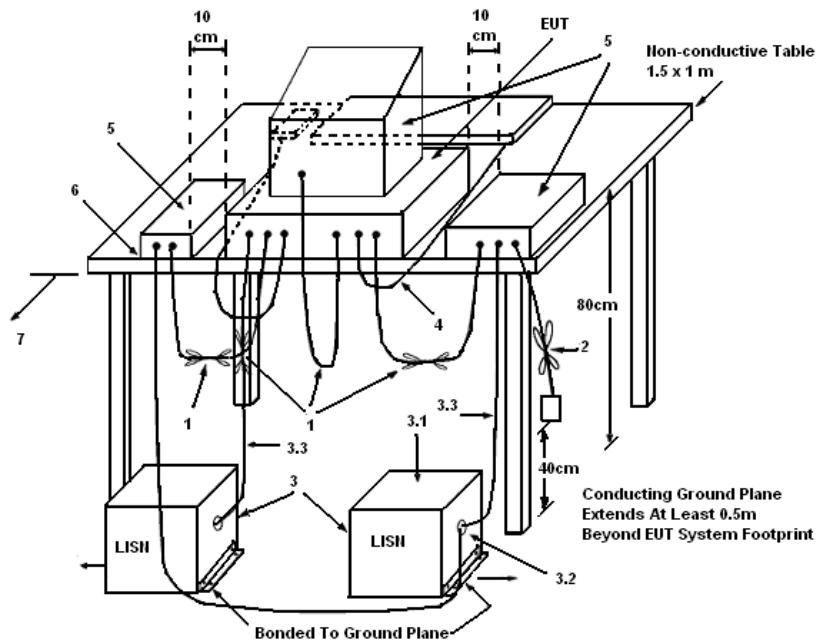

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	51%
Test Engineer	Ryo Fan	Phase	Line
Configuration	Mode 1		

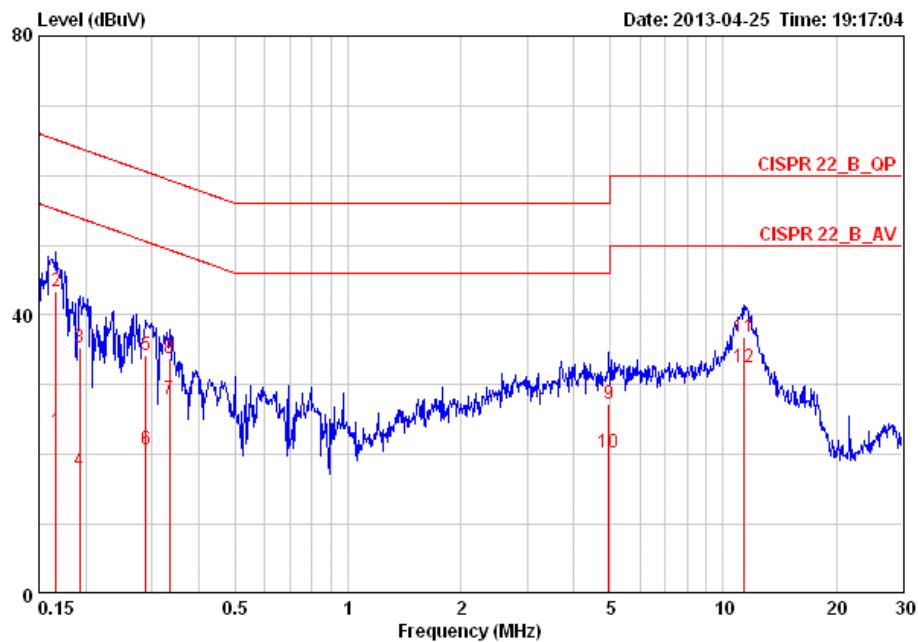

Freq MHz	Level dBuV	Over Limit dB	Limit Line dBuV	Read Level dBuV	LISN Factor	Cable Loss dB	Pol/Phase	Remark	
								Line	Remark
1	0.16677	23.39	-31.73	55.12	23.04	0.16	0.19	LINE	AVERAGE
2	0.16677	43.45	-21.67	65.12	43.10	0.16	0.19	LINE	QP
3	0.19242	35.29	-28.64	63.93	34.94	0.15	0.20	LINE	QP
4	0.19242	17.71	-36.22	53.93	17.36	0.15	0.20	LINE	AVERAGE
5	0.28935	34.22	-26.32	60.54	33.87	0.15	0.20	LINE	QP
6	0.28935	20.81	-29.73	50.54	20.46	0.15	0.20	LINE	AVERAGE
7	0.33385	28.00	-21.35	49.35	27.65	0.15	0.20	LINE	AVERAGE
8	0.33385	33.89	-25.46	59.35	33.54	0.15	0.20	LINE	QP
9	4.952	27.27	-28.73	56.00	26.71	0.24	0.32	LINE	QP
10	4.952	20.28	-25.72	46.00	19.72	0.24	0.32	LINE	AVERAGE
11	11.317	36.74	-23.26	60.00	35.99	0.36	0.39	LINE	QP
12	11.317	32.52	-17.48	50.00	31.77	0.36	0.39	LINE	AVERAGE

Temperature	25°C	Humidity	51%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	Mode 1		

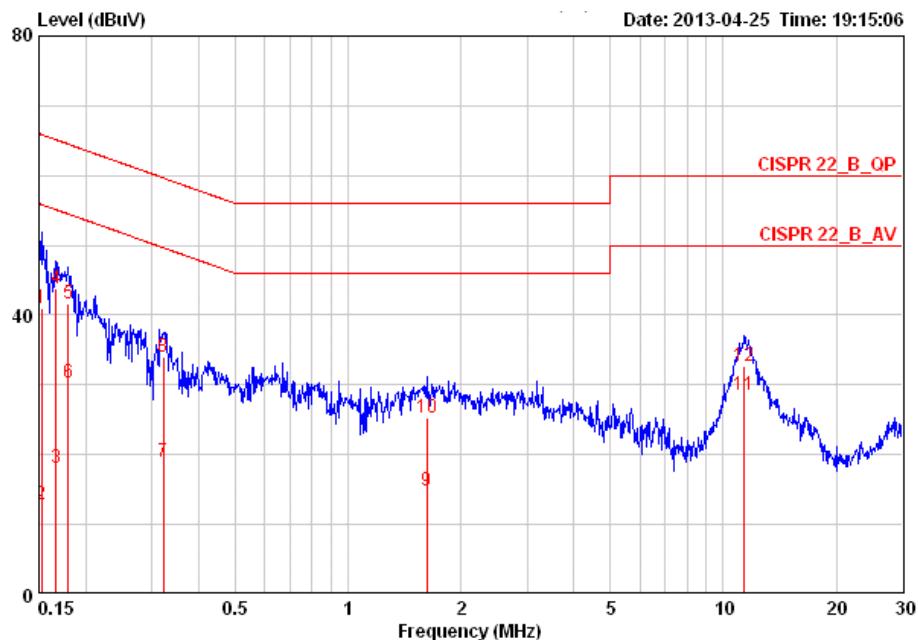

Freq	Over Limit		Read Line		LISN Level	Cable Factor	Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV					
1	0.15240	41.03	-24.84	65.87	40.77	0.08	0.18	NEUTRAL	QP
2	0.15240	12.83	-43.04	55.87	12.57	0.08	0.18	NEUTRAL	AVERAGE
3	0.16677	18.09	-37.03	55.12	17.82	0.08	0.19	NEUTRAL	AVERAGE
4	0.16677	43.75	-21.37	65.12	43.48	0.08	0.19	NEUTRAL	QP
5	0.17961	41.74	-22.76	64.50	41.47	0.08	0.19	NEUTRAL	QP
6	0.17961	30.37	-24.13	54.50	30.10	0.08	0.19	NEUTRAL	AVERAGE
7	0.32169	18.94	-30.72	49.66	18.66	0.08	0.20	NEUTRAL	AVERAGE
8	0.32169	34.09	-25.57	59.66	33.81	0.08	0.20	NEUTRAL	QP
9	1.619	14.79	-31.21	46.00	14.47	0.10	0.22	NEUTRAL	AVERAGE
10	1.619	25.35	-30.65	56.00	25.03	0.10	0.22	NEUTRAL	QP
11	11.377	28.48	-21.52	50.00	27.83	0.26	0.39	NEUTRAL	AVERAGE
12	11.377	32.80	-27.20	60.00	32.15	0.26	0.39	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

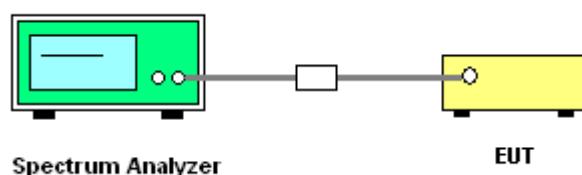

### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth & 99% Occupied Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.80	17.44
40	5200 MHz	21.60	17.76
48	5240 MHz	20.32	17.44

##### Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	44.16	38.08
46	5230 MHz	43.84	36.80

##### Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 4 + Ant. 5 + Ant. 6


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	83.52	75.60

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Kenneth Huang	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6**


<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	19.68	16.80
40	5200 MHz	21.28	17.12
48	5240 MHz	21.60	16.96

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz /  
Ant. 4 + Ant. 5 + Ant. 6 / 5180 MHz**

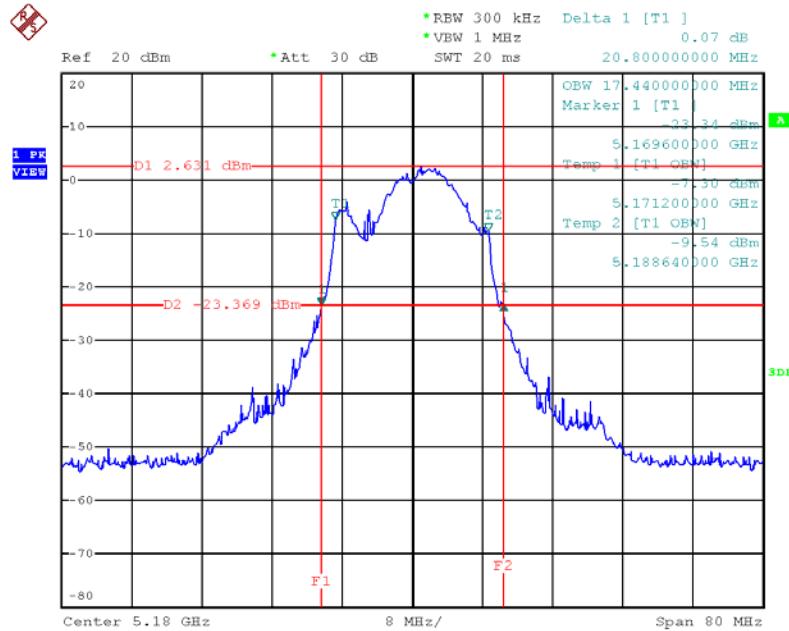


Date: 19.JUN.2013 17:21:38

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz /  
Ant. 4 + Ant. 5 + Ant. 6 / 5200 MHz**

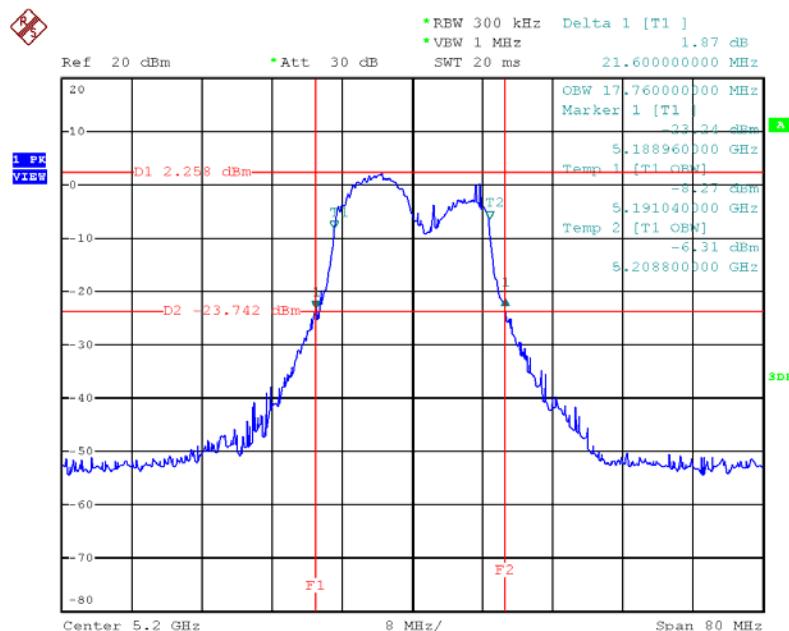


Date: 19.JUN.2013 17:21:09

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz /  
Ant. 4 + Ant. 5 + Ant. 6 / 5240 MHz**

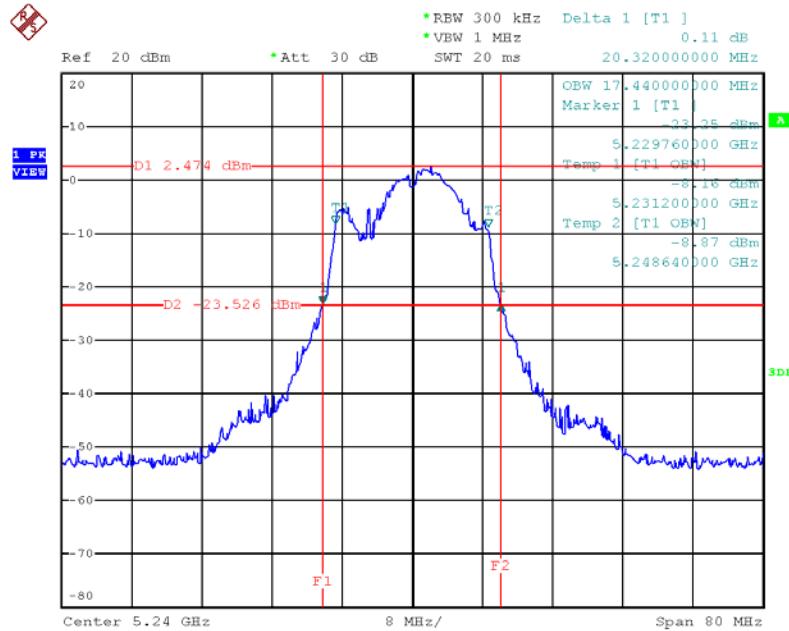


Date: 19.JUN.2013 17:20:29

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz /  
Ant. 4 + Ant. 5 + Ant. 6 / 5190 MHz**

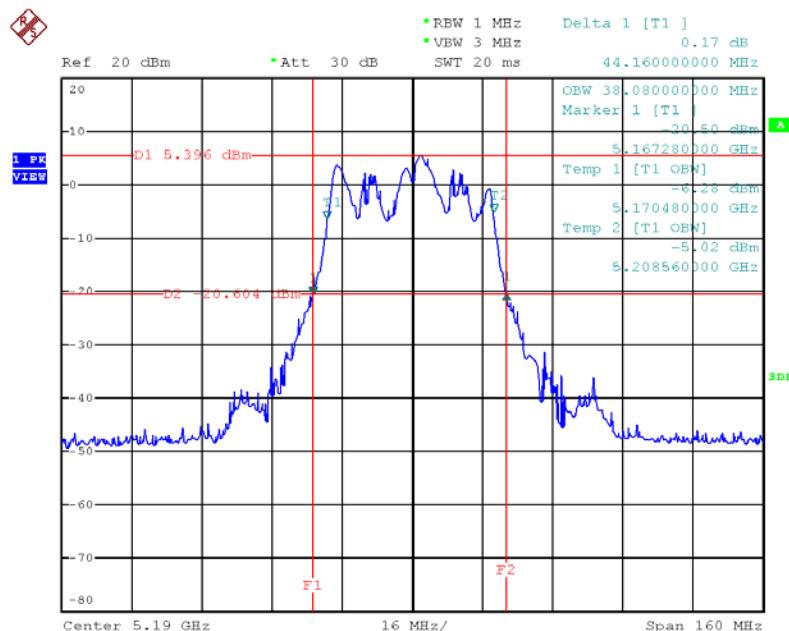


Date: 19.JUN.2013 17:22:25

### 26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 4 + Ant. 5 + Ant. 6 / 5230 MHz

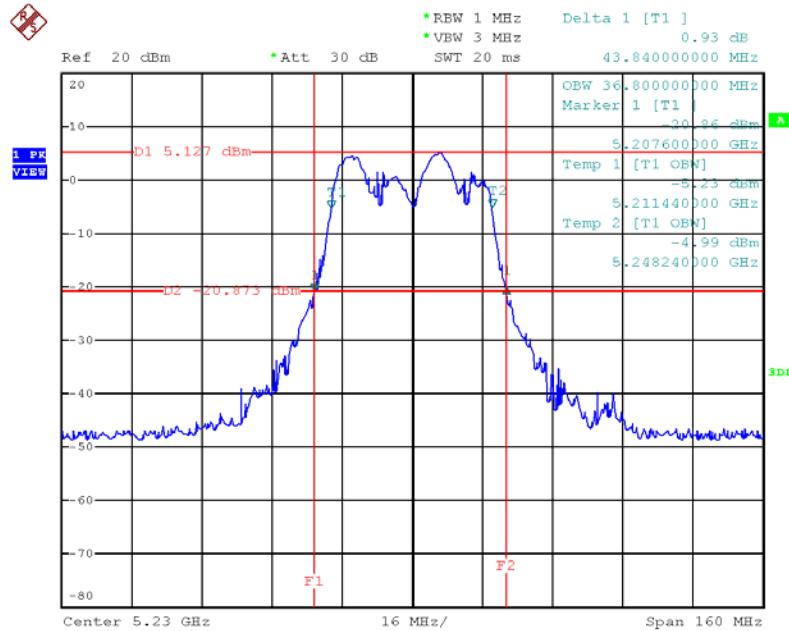


Date: 19.JUN.2013 17:23:03

### 26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 4 + Ant. 5 + Ant. 6 / 5210 MHz

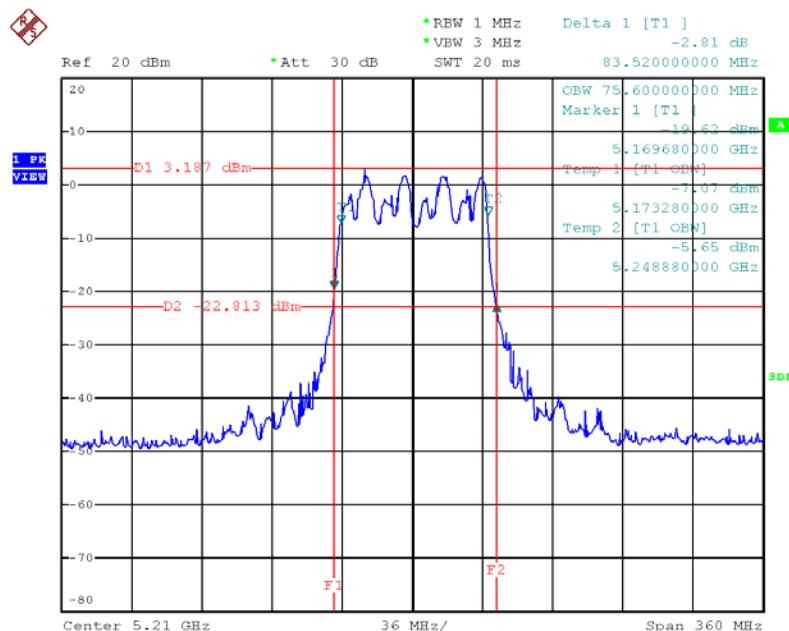


Date: 19.JUN.2013 17:43:20


### 26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5180 MHz

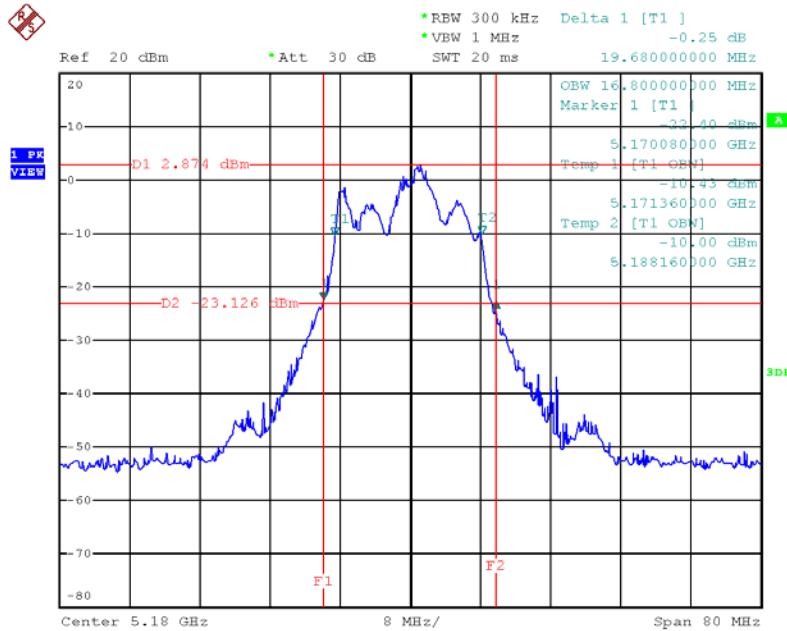

### 26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5200 MHz

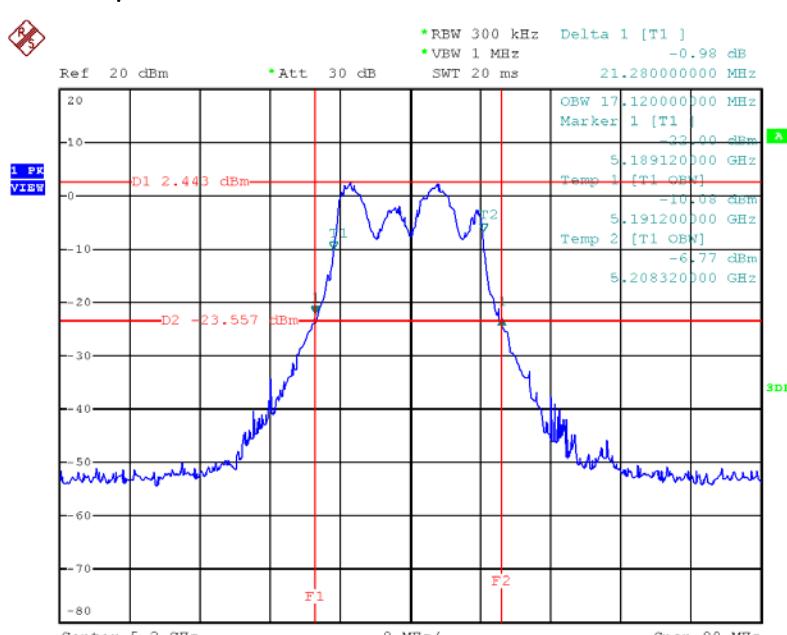

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /  
Ant. 4 + Ant. 5 + Ant. 6 / 5240 MHz**

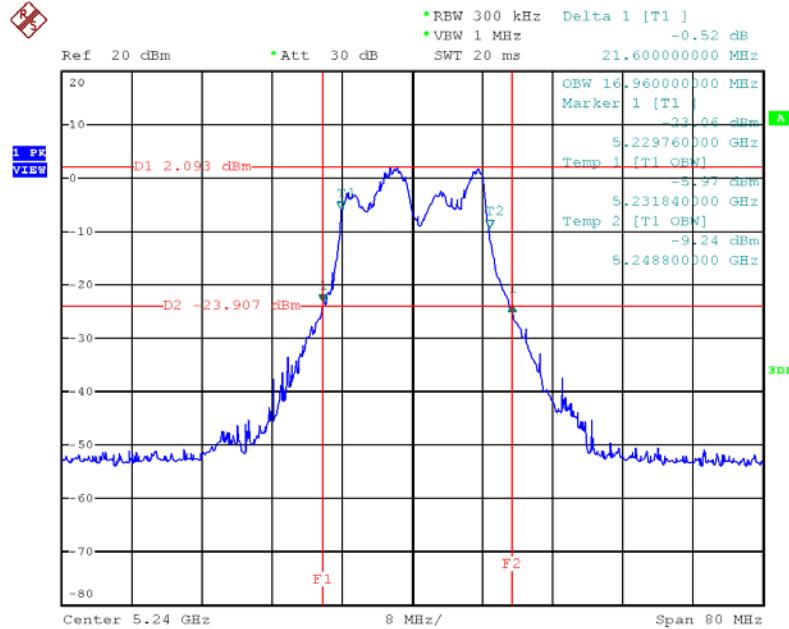

Date: 19.JUN.2013 17:18:57

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

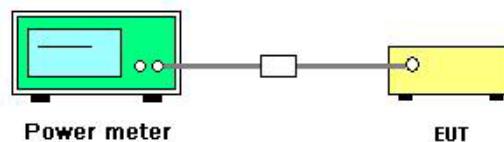

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac
Test Date	Jun. 18, 2013		

##### Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.4	Ant.5	Ant.6			
36	5180 MHz	10.82	11.19	11.02	15.78	17.00	Complies
40	5200 MHz	10.88	11.10	11.27	15.86	17.00	Complies
48	5240 MHz	10.75	10.90	11.20	15.73	17.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.4	Ant.5	Ant.6			
38	5190 MHz	11.02	11.34	11.13	15.94	17.00	Complies
46	5230 MHz	10.84	10.95	11.19	15.77	17.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.4	Ant.5	Ant.6			
42	5210 MHz	11.01	11.26	11.31	15.97	17.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11a
Test Date	Jun. 18, 2013		

**Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6**

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.4	Ant.5	Ant.6			
36	5180 MHz	11.02	11.21	11.20	15.92	16.94	Complies
40	5200 MHz	10.93	11.12	11.34	15.90	17.00	Complies
48	5240 MHz	10.80	11.02	11.29	15.81	17.00	Complies

Note: 17dBm or  $4 + 10\log B$ , B=EBW, so 5180MHz Power limit= $4 + 10\log(19.68) = 16.94$ dBm

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

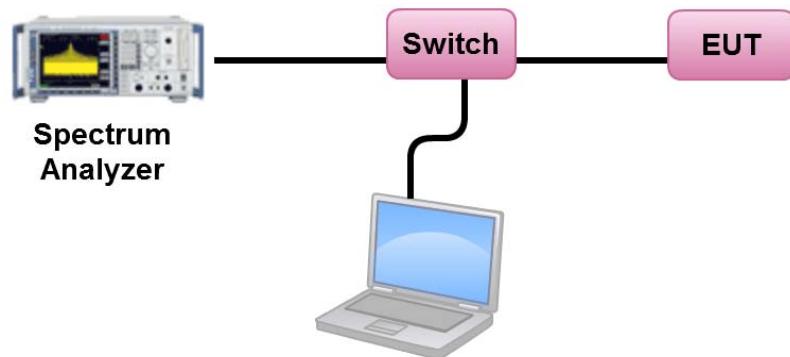

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac
Test Date	Jun. 18, 2013		

##### Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	0.73	1.52	Complies
40	5200 MHz	0.83	1.52	Complies
48	5240 MHz	1.03	1.52	Complies

Note: Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.48\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $4 - (8.48 - 6) = 1.52\text{dBm/MHz}$

##### Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-1.04	1.52	Complies
46	5230 MHz	-0.77	1.52	Complies

Note: Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.48\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $4 - (8.48 - 6) = 1.52\text{dBm/MHz}$

##### Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 4 + Ant. 5 + Ant. 6

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-2.82	1.52	Complies

Note: Directional gain =  $G_{ANT} + 10\log(N_{ANT}/Nss) = 8.48\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $4 - (8.48 - 6) = 1.52\text{dBm/MHz}$

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Kenneth Huang	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Jun. 18, 2013		

**Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6**


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	0.95	1.52	Complies
40	5200 MHz	1.37	1.52	Complies
48	5240 MHz	1.32	1.52	Complies

Note: Directional gain =  $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 8.48\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $4 - (8.48 - 6) = 1.52\text{dBm/MHz}$


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 4 + Ant. 5 + Ant. 6 / 5240 MHz**

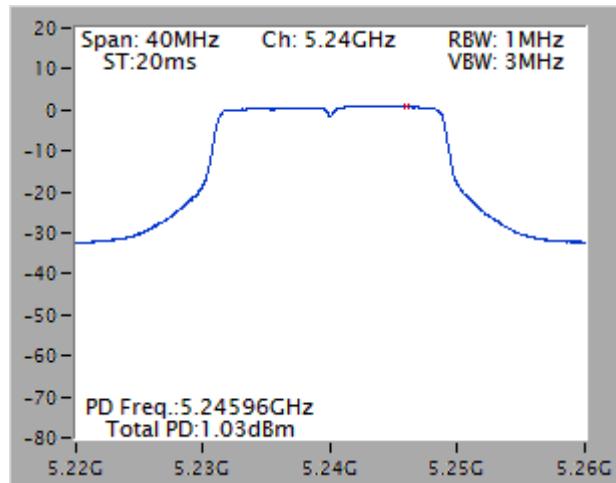


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 4 + Ant. 5 + Ant. 6 / 5230 MHz**

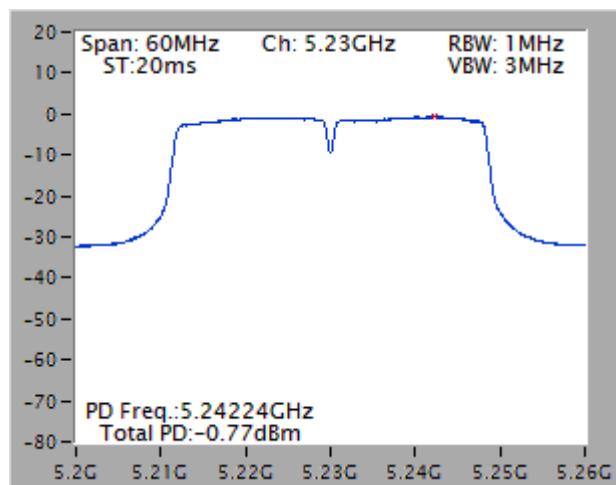

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT 80MHz / Ant. 4 + Ant. 5 + Ant. 6 / 5210 MHz**

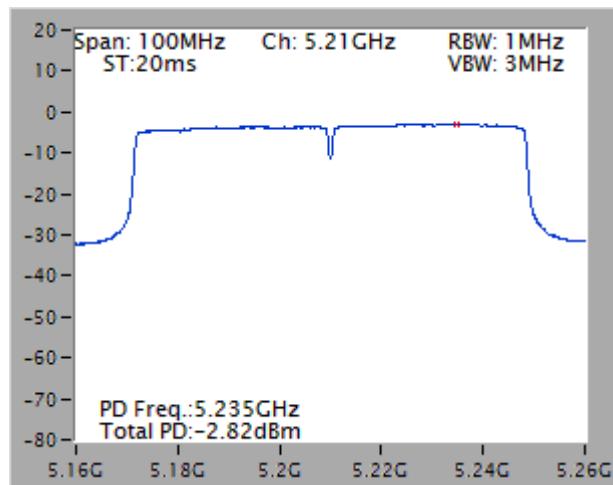

**Power Density Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 5200 MHz**

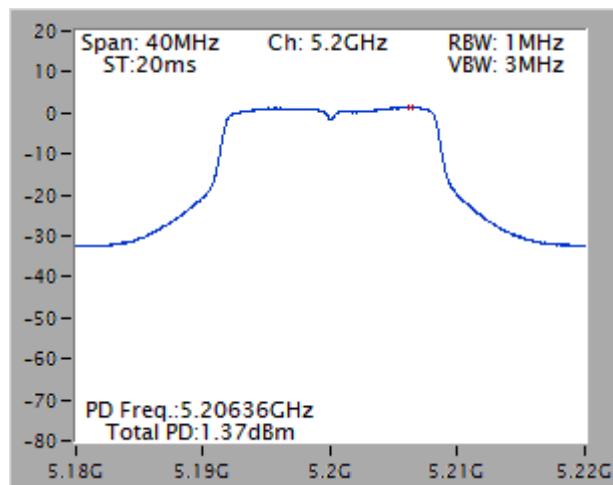

## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz (Peak Trace) / 1MHz (Average Trace)
VBW	$\geq$ 3MHz (Peak Trace) / $\geq$ 3MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

### 4.5.3. Test Procedures

1. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
2. Delta Mark trace A Maximum frequency and trace B same frequency.
3. Repeat the above procedure until measurements for all frequencies were complete.
4. Testing each modulation mode on a single channel in single operating band at single output port. All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

Temperature	25°C	Humidity	56%
Test Engineer	Kenneth Huang	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 4 + Ant. 5 + Ant. 6

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK(MCS0)	5200MHz	9.94	13	Complies
QPSK(MCS1)	5200MHz	10.09	13	Complies
16QAM(MCS3)	5200MHz	10.93	13	Complies
64QAM(MCS5)	5200MHz	11.00	13	Complies
256QAM(MCS8)	5200MHz	12.02	13	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 4 + Ant. 5 + Ant. 6

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK(MCS0)	5190MHz	9.48	13	Complies
QPSK(MCS1)	5190MHz	9.97	13	Complies
16QAM(MCS3)	5190MHz	11.63	13	Complies
64QAM(MCS5)	5190MHz	10.58	13	Complies
256QAM(MCS8)	5190MHz	11.14	13	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 4 + Ant. 5 + Ant. 6

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK(MCS0)	5210MHz	9.78	13	Complies
QPSK(MCS1)	5210MHz	10.15	13	Complies
16QAM(MCS3)	5210MHz	10.50	13	Complies
64QAM(MCS5)	5210MHz	11.12	13	Complies
256QAM(MCS8)	5210MHz	11.68	13	Complies


<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Kenneth Huang	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6**

<b>Modulation</b>	<b>Frequency</b>	<b>Peak Excursion (dB)</b>	<b>Max. Limit (dB)</b>	<b>Result</b>
BPSK(6Mbps)	5180MHz	10.19	13	Complies
QPSK(12Mbps)	5180MHz	9.40	13	Complies
16QAM(24Mbps)	5180MHz	10.08	13	Complies
64QAM(48Mbps)	5180MHz	11.66	13	Complies


Note: Only the channel with maximum results was listed in the report.

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 4 + Ant. 5 + Ant. 6 / 256QAM(MCS8) / 5200 MHz**

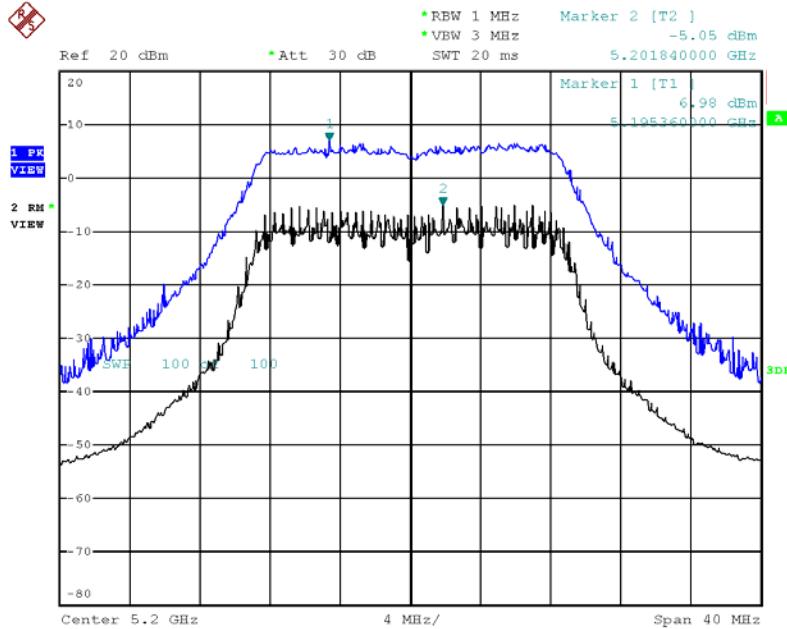


Date: 19.JUN.2013 18:04:37

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 4 + Ant. 5 + Ant. 6 / 16QAM(MCS3) / 5190 MHz**

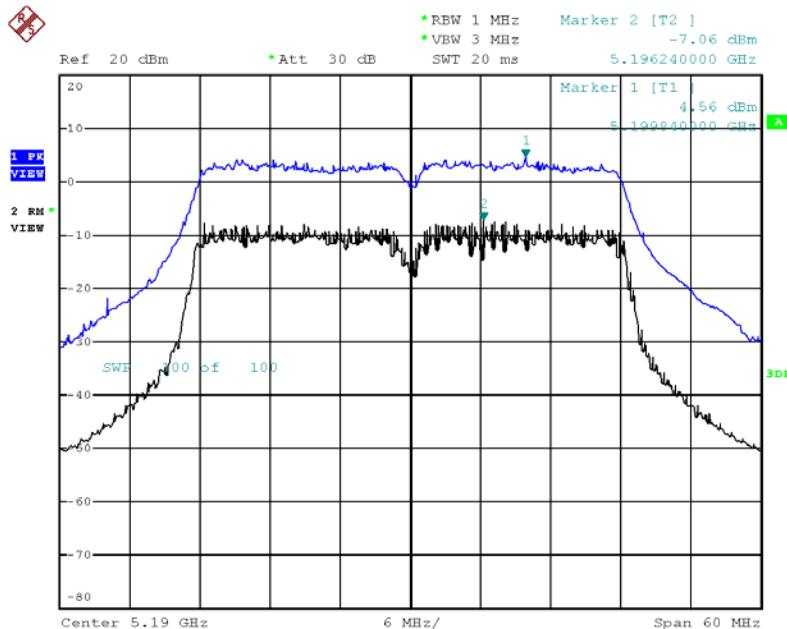


Date: 19.JUN.2013 17:49:01

**Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 4 + Ant. 5 + Ant. 6 / 256QAM(MCS8) / 5210 MHz**

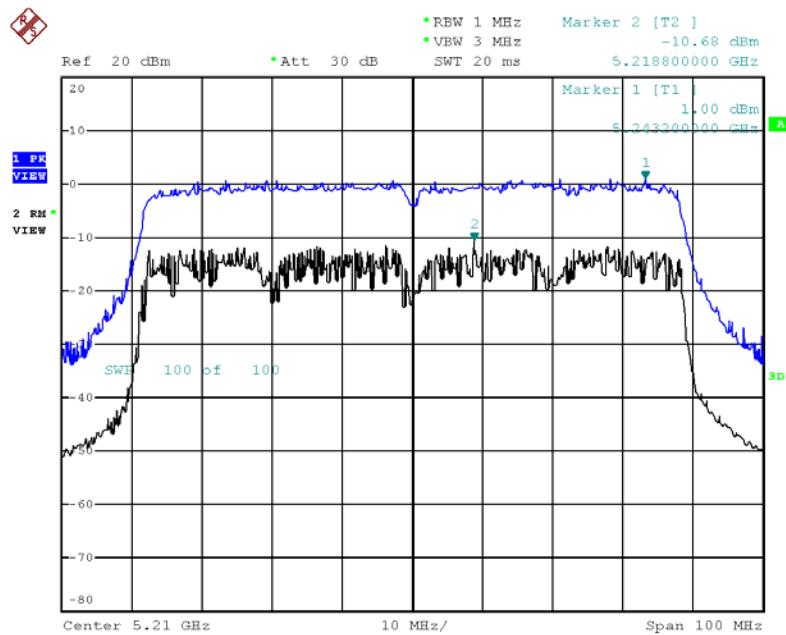

Date: 19.JUN.2013 17:39:12

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 4 + Ant. 5 + Ant. 6 / 64QAM(48Mbps) / 5180 MHz**

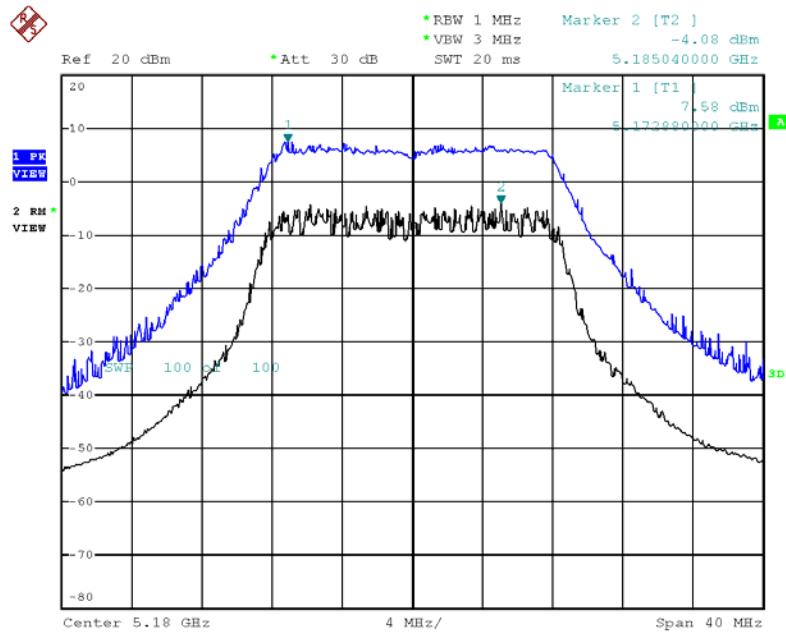

Date: 19.JUN.2013 18:08:42

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 1GHz

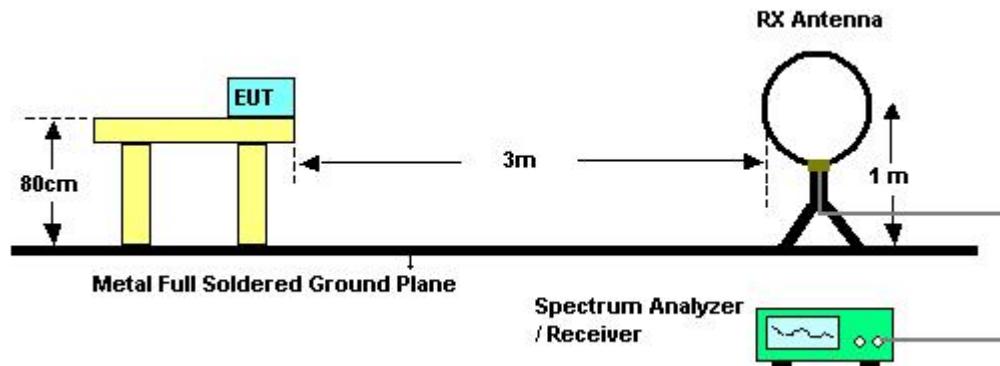

For radiated emissions above 1GHz

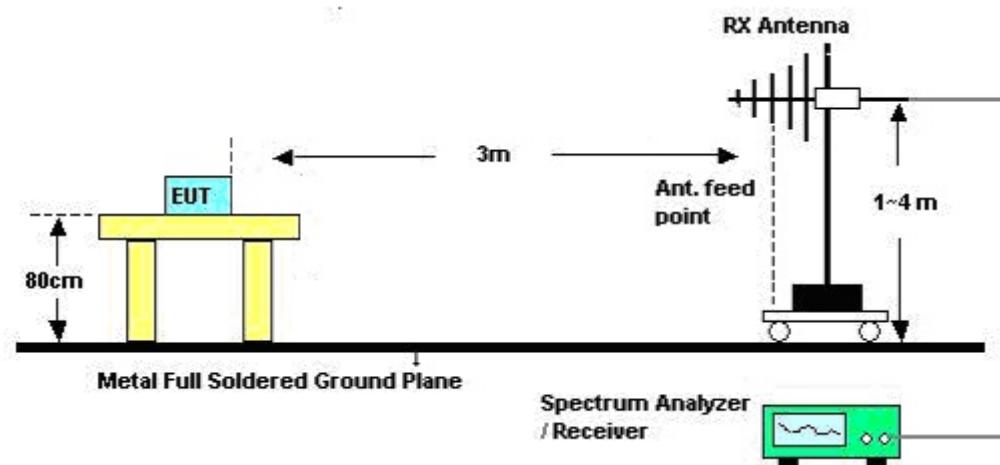

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	Normal Link
Test Date	May 30, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Test Mode	Mode 1

##### Horizontal

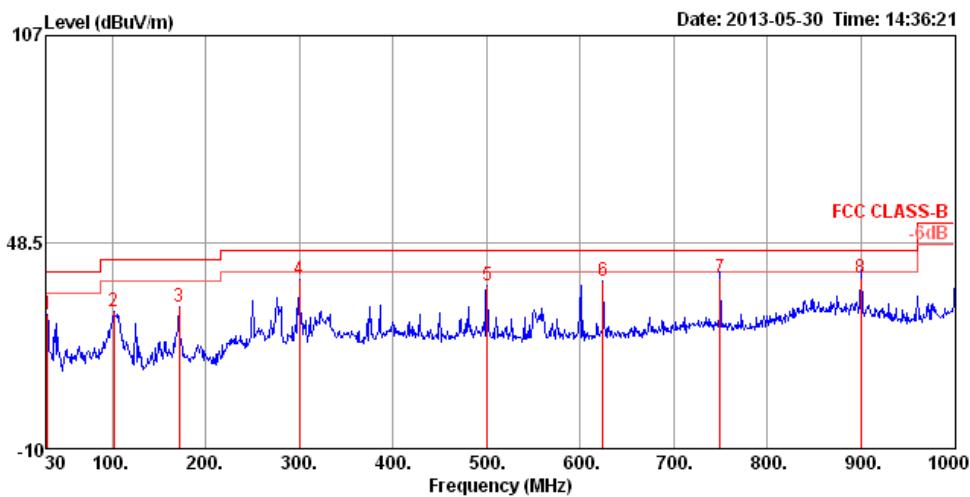

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
					Line	Limit	Level						
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg		
1	30.97	27.97	40.00	-12.03	41.70	0.65	17.44	31.82	150	280	HORIZONTAL	Peak	
2	101.78	28.99	43.50	-14.51	48.84	1.19	10.56	31.60	300	162	HORIZONTAL	Peak	
3	171.62	30.11	43.50	-13.39	51.08	1.59	8.96	31.52	200	103	HORIZONTAL	Peak	
4 pk	299.66	38.12	46.00	-7.88	54.39	2.13	13.02	31.42	100	265	HORIZONTAL	Peak	
5	500.45	36.17	46.00	-9.83	47.84	2.82	16.92	31.41	150	140	HORIZONTAL	Peak	
6	624.61	37.31	46.00	-8.69	46.92	3.18	18.61	31.40	150	58	HORIZONTAL	Peak	
7	749.74	38.39	46.00	-7.61	46.54	3.53	19.69	31.37	100	359	HORIZONTAL	QP	
8	900.09	38.32	46.00	-7.68	44.92	3.97	20.64	31.21	100	87	HORIZONTAL	QP	

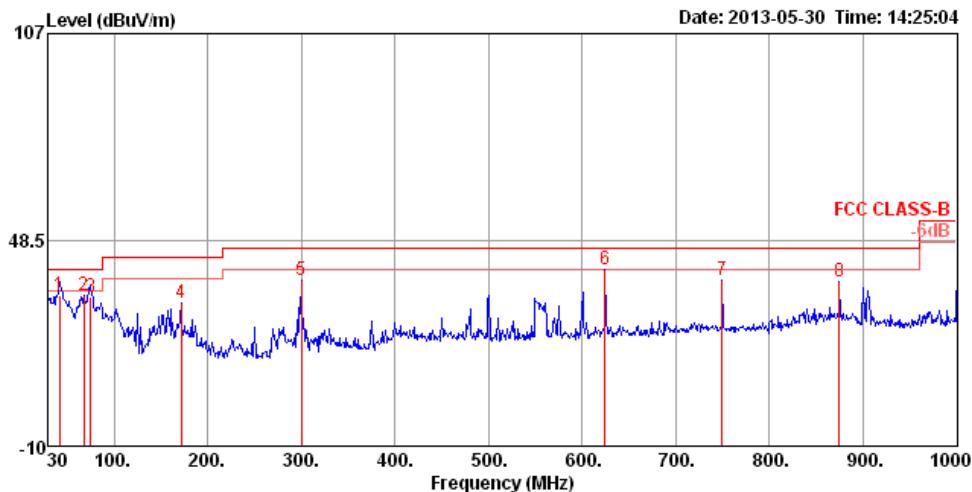**Vertical**


Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB	cm	deg		
1 qp	41.64	32.84	40.00	-7.16	52.67	0.76	11.27	31.86	100	145	VERTICAL	OP
2	67.83	32.65	40.00	-7.35	58.40	0.98	5.08	31.81	200	53	VERTICAL	Peak
3	74.56	32.29	40.00	-7.71	57.00	1.02	5.95	31.68	131	229	VERTICAL	QP
4	171.62	30.66	43.50	-12.84	51.63	1.59	8.96	31.52	100	105	VERTICAL	Peak
5	299.66	36.99	46.00	-9.01	53.26	2.13	13.02	31.42	200	196	VERTICAL	Peak
6	624.61	39.87	46.00	-6.13	49.48	3.18	18.61	31.40	100	82	VERTICAL	Peak
7	749.74	36.85	46.00	-9.15	45.00	3.53	19.69	31.37	100	269	VERTICAL	Peak
8	874.87	36.42	46.00	-9.58	43.44	3.89	20.24	31.15	125	112	VERTICAL	Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.1ac MCS0/Nss1 20MHz Ch 36 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 05, 2013		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	15539.16	32.26	54.00	-21.74	17.62	10.37	38.78	34.51	100	211	HORIZONTAL	Average	
2 pk	15539.73	43.93	74.00	-30.07	29.29	10.37	38.78	34.51	100	211	HORIZONTAL	Peak	

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1 pk	15538.34	41.51	74.00	-32.49	26.87	10.37	38.78	34.51	100	102	VERTICAL	Peak	
2	15541.69	32.33	54.00	-21.67	17.70	10.37	38.78	34.52	100	102	VERTICAL	Average	



Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 20MHz Ch 40 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 05, 2013		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15596.07	35.83	54.00	-18.17	21.29	10.36	38.77	34.59	151	149	HORIZONTAL Average
2 pk	15598.50	43.79	74.00	-30.21	29.25	10.36	38.77	34.59	151	149	HORIZONTAL Peak

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15597.95	32.47	54.00	-21.53	17.93	10.36	38.77	34.59	100	355	VERTICAL Average
2 pk	15600.49	42.79	74.00	-31.21	28.27	10.36	38.75	34.59	100	355	VERTICAL Peak



Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 20MHz Ch 48 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 05, 2013		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	15725.58	39.77	54.00	-14.23	25.44	10.36	38.72	34.75	100	144	HORIZONTAL	Average	
2 pk	15726.95	51.94	74.00	-22.06	37.61	10.36	38.72	34.75	100	144	HORIZONTAL	Peak	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV			cm	deg		
1	15720.62	38.67	54.00	-15.33	24.33	10.36	38.72	34.74	150	98	VERTICAL	Average	
2 pk	15722.17	51.80	74.00	-22.20	37.46	10.36	38.72	34.74	150	98	VERTICAL	Peak	

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 38 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit			Loss	Factor						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	15652.08	32.14	54.00	-21.86	17.71	10.36	38.73	34.66	100	255	HORIZONTAL	Average	
2 pk	15653.76	42.23	74.00	-31.77	27.80	10.36	38.73	34.66	100	86	HORIZONTAL	Peak	

**Vertical**

Freq	Level	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit			Loss	Factor						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	15646.19	32.39	54.00	-21.61	17.95	10.36	38.73	34.65	100	61	VERTICAL	Average	
2 pk	15650.46	43.23	74.00	-30.77	28.79	10.36	38.73	34.65	100	61	VERTICAL	Peak	



Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 46 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

*Horizontal*

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m									
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15698.72	32.36	54.00	-21.64	17.99	10.36	38.72	34.71	100	351	HORIZONTAL	Average
2	pk 15699.10	43.03	74.00	-30.97	28.66	10.36	38.72	34.71	100	351	HORIZONTAL	Peak

*Vertical*

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m									
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg		
1	pk 15686.96	44.58	74.00	-29.42	30.19	10.36	38.73	34.70	100	96	VERTICAL	Peak
2	15695.02	32.68	54.00	-21.32	18.31	10.36	38.72	34.71	100	96	VERTICAL	Average

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 80MHz Ch 42 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	15615.92	57.05	74.00	-16.95	42.55	10.36	38.75	34.61	100	96	HORIZONTAL Peak
2	15634.72	46.62	54.00	-7.38	32.14	10.36	38.75	34.63	100	96	HORIZONTAL Average

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 pk	15601.52	57.63	74.00	-16.37	43.11	10.36	38.75	34.59	100	18	VERTICAL Peak
2	15628.96	46.80	54.00	-7.20	32.32	10.36	38.75	34.63	100	18	VERTICAL Average

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 36 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB									
MHz		dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1 pk	15533.14	44.24	74.00	-29.76	29.60	10.37	38.78	34.51	100	131	HORIZONTAL	Peak
2	15546.18	33.25	54.00	-20.75	18.62	10.37	38.78	34.52	100	244	HORIZONTAL	Average

**Vertical**

Freq	Level	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB									
MHz		dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	15542.56	32.07	54.00	-21.93	17.44	10.37	38.78	34.52	100	131	VERTICAL	Average
2 pk	15545.94	42.29	74.00	-31.71	27.66	10.37	38.78	34.52	100	131	VERTICAL	Peak

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 40 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

**Horizontal**

Freq	Level	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit			dB	dBuV			dB			
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg			
1 pk	15594.44	51.17	74.00	-22.83	36.62	10.36	38.77	34.58	100	144	HORIZONTAL	Peak	
2	15604.18	38.53	54.00	-15.47	24.02	10.36	38.75	34.60	100	144	HORIZONTAL	Average	

**Vertical**

Freq	Level	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit			dB	dBuV			dB			
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg			
1	15597.84	40.18	54.00	-13.82	25.64	10.36	38.77	34.59	100	128	VERTICAL	Average	
2 pk	15607.32	51.13	74.00	-22.87	36.62	10.36	38.75	34.60	100	128	VERTICAL	Peak	

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 48 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB			dBuV	dB			cm	deg		
1	15716.74	43.51	54.00	-10.49	29.17	10.36	38.72	34.74	100	51	HORIZONTAL	Average	
2	pk 15726.70	53.97	74.00	-20.03	39.64	10.36	38.72	34.75	100	51	HORIZONTAL	Peak	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB			dBuV	dB			cm	deg		
1	pk 15714.36	52.51	74.00	-21.49	38.16	10.36	38.72	34.73	100	114	VERTICAL	Peak	
2	15724.76	41.17	54.00	-12.83	26.84	10.36	38.72	34.75	100	114	VERTICAL	Average	

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### **4.7.4. Test Setup Layout**

This test setup layout is the same as that shown in section 4.6.4.

#### **4.7.5. Test Deviation**

There is no deviation with the original standard.

#### **4.7.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 20MHz Ch 36, 40, 48 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

##### Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV	dB					
MHz	dBuV/m	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1 !	5147.90	52.83	54.00	-1.17	13.82	5.99	33.02	0.00	100	268	VERTICAL	Average	
2 !	5148.90	72.39	74.00	-1.61	33.38	5.99	33.02	0.00	100	268	VERTICAL	Peak	
3 pk	5185.00	118.90			79.85	6.01	33.04	0.00	100	268	VERTICAL	Peak	
4	5185.40	108.65			69.60	6.01	33.04	0.00	100	268	VERTICAL	Average	

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV	dB					
MHz	dBuV/m	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1 !	5150.00	52.35	54.00	-1.65	13.34	5.99	33.02	0.00	100	257	VERTICAL	Average	
2	5150.00	67.02	74.00	-6.98	28.01	5.99	33.02	0.00	100	257	VERTICAL	Peak	
3 pk	5194.80	122.38			83.31	6.02	33.05	0.00	100	257	VERTICAL	Peak	
4	5195.00	111.56			72.49	6.02	33.05	0.00	100	257	VERTICAL	Average	

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV	dB					
MHz	dBuV/m	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	5144.00	62.98	74.00	-11.02	23.97	5.99	33.02	0.00	100	258	VERTICAL	Peak	
2 !	5150.00	48.85	54.00	-5.15	9.84	5.99	33.02	0.00	100	258	VERTICAL	Average	
3	5234.00	113.92			74.79	6.04	33.09	0.00	100	258	VERTICAL	Average	
4 pk	5235.50	123.33			84.20	6.04	33.09	0.00	100	258	VERTICAL	Peak	
5	5350.00	46.75	54.00	-7.25	7.24	6.11	33.40	0.00	100	258	VERTICAL	Average	
6	5350.00	63.08	74.00	-10.92	23.57	6.11	33.40	0.00	100	258	VERTICAL	Peak	

Item 3, 4 are the fundamental frequency at 5240 MHz.

##### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 38, 46 / Ant. 4 + Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

**Channel 38**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB			dBuV	dB			cm	deg		
MHz	dBuV/m	dBuV/m	dB										
1 !	5150.00	52.67	54.00	-1.33	13.66	5.99	33.02	0.00	158	267	HORIZONTAL	Average	
2	5150.00	67.76	74.00	-6.24	28.75	5.99	33.02	0.00	158	267	HORIZONTAL	Peak	
3	5200.60	97.91			58.84	6.02	33.05	0.00	158	267	HORIZONTAL	Average	
4 pk	5200.60	110.39			71.32	6.02	33.05	0.00	158	267	HORIZONTAL	Peak	

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dB			dBuV	dB			cm	deg		
MHz	dBuV/m	dBuV/m	dB										
1 !	5150.00	52.74	54.00	-1.26	13.73	5.99	33.02	0.00	100	257	VERTICAL	Average	
2	5150.00	65.50	74.00	-8.50	26.49	5.99	33.02	0.00	100	257	VERTICAL	Peak	
3	5213.80	106.09			67.00	6.03	33.06	0.00	100	257	VERTICAL	Average	
4 pk	5213.80	118.21			79.08	6.04	33.09	0.00	100	257	VERTICAL	Peak	

Item 3, 4 are the fundamental frequency at 5230 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	60%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 80MHz Ch 42 / Ant. 4 +Ant. 5 + Ant. 6
Test Date	Jun. 04, 2013		

**Channel 42**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1 !	5143.54	52.51	54.00	-1.49	13.50	5.99	33.02	0.00	154	280	HORIZONTAL Average
2	5143.54	65.51	74.00	-8.49	26.50	5.99	33.02	0.00	154	280	HORIZONTAL Peak
3	5223.92	94.70			55.58	6.04	33.08	0.00	154	280	HORIZONTAL Average
4 pk	5243.30	105.46			66.32	6.05	33.09	0.00	154	280	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<b>Temperature</b>	24.5°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a Ch 36, 40, 48 / Ant. 4 +Ant. 5 + Ant. 6
<b>Test Date</b>	Jun. 04, 2013		

### Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV	dB						
1 !	5147.70	71.87	74.00	-2.13	32.86	5.99	33.02	0.00	101	268	VERTICAL	Peak		
2 !	5148.30	51.75	54.00	-2.25	12.74	5.99	33.02	0.00	101	268	VERTICAL	Average		
3 pk	5187.50	119.74			80.67	6.02	33.05	0.00	101	268	VERTICAL	Peak		
4	5187.70	109.64			70.57	6.02	33.05	0.00	101	268	VERTICAL	Average		

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV	dB						
1	5149.20	67.19	74.00	-6.81	28.18	5.99	33.02	0.00	156	275	HORIZONTAL	Peak		
2 !	5150.00	52.99	54.00	-1.01	13.98	5.99	33.02	0.00	156	275	HORIZONTAL	Average		
3	5201.20	110.71			71.64	6.02	33.05	0.00	156	275	HORIZONTAL	Average		
4 pk	5206.40	121.16			82.07	6.03	33.06	0.00	156	275	HORIZONTAL	Peak		

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			dB	dBuV	dB						
1	5143.10	61.88	74.00	-12.12	22.87	5.99	33.02	0.00	100	268	VERTICAL	Peak		
2	5144.60	47.76	54.00	-6.24	8.75	5.99	33.02	0.00	100	268	VERTICAL	Average		
3	5232.80	113.82			74.69	6.04	33.09	0.00	100	268	VERTICAL	Average		
4 pk	5233.10	123.18			84.05	6.04	33.09	0.00	100	268	VERTICAL	Peak		
5	5350.00	47.78	54.00	-6.22	8.27	6.11	33.40	0.00	100	268	VERTICAL	Average		
6	5350.00	59.24	74.00	-14.76	19.73	6.11	33.40	0.00	100	268	VERTICAL	Peak		

Item 3, 4 are the fundamental frequency at 5240 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $0^\circ\text{C} \sim 40^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

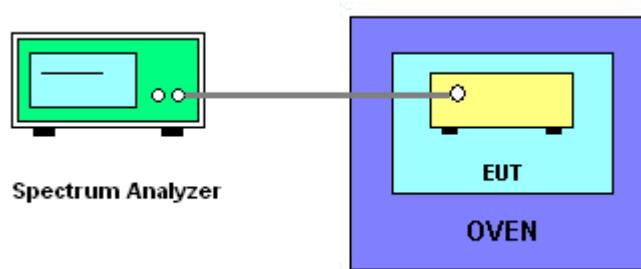

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5199.9900
110.00	5199.9920
93.50	5199.9920
Max. Deviation (MHz)	0.010000
Max. Deviation (ppm)	1.92

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
0	5200.0666
10	5200.0510
20	5200.0330
30	5200.0168
40	5200.0048
Max. Deviation (MHz)	0.066600
Max. Deviation (ppm)	12.81

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jun. 26, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
combined standard uncertainty $U_e(y)$	1.2			
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	2.4			

### Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	0.038	dB	normal(k=2)	0.019
Attenuator	0.047	dB	normal(k=2)	0.024
Power Meter specification	0.300	dB	normal(k=2)	0.150
Power Sensor specification	0.300	dB	normal(k=2)	0.150
Mismatch Receiver VSWR 1= Antenna VSWR 2= Pre Amplifier VSWR 3=	-0.080	dB	U-shaped	0.060
combined standard uncertainty $U_e(y)$	0.403			
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	0.806			

**Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1727	dB	normal(k=1)	0.1727
Cable loss	0.1736	dB	normal(k=2)	0.0868
Antenna gain	0.1687	dB	normal(k=2)	0.0843
Site imperfection	0.4898	dB	Triangular	0.2
Pre-amplifier gain	0.3661	dB	normal(k=2)	0.183
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.5	dB	rectangular	0.2887
combined standard uncertainty $U_e(y)$				1.1434
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$				2.2869

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1908	dB	normal(k=1)	0.1908
Cable loss	0.1685	dB	normal(k=2)	0.0843
Antenna gain	0.1912	dB	normal(k=2)	0.0956
Site imperfection	1.3091	dB	Triangular	0.5344
Pre-amplifier gain	0.3043	dB	normal(k=2)	0.1521
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.8	dB	rectangular	0.4619
combined standard uncertainty $U_e(y)$				1.2965
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$				2.593

## Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1864	dB	normal(k=1)	0.1864
Cable loss	0.1666	dB	normal(k=2)	0.0833
Antenna gain	0.1904	dB	normal(k=2)	0.0952
Site imperfection	0.4882	dB	Triangular	0.1993
Pre-amplifier gain	0.2688	dB	normal(k=2)	0.1344
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.8	dB	rectangular	0.4619
combined standard uncertainty $U_e(y)$				1.1874
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$				2.3749