


## Appendix C. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	61%
Test Engineer	Serway Li	Configurations	2.4G + 5G

Horizontal

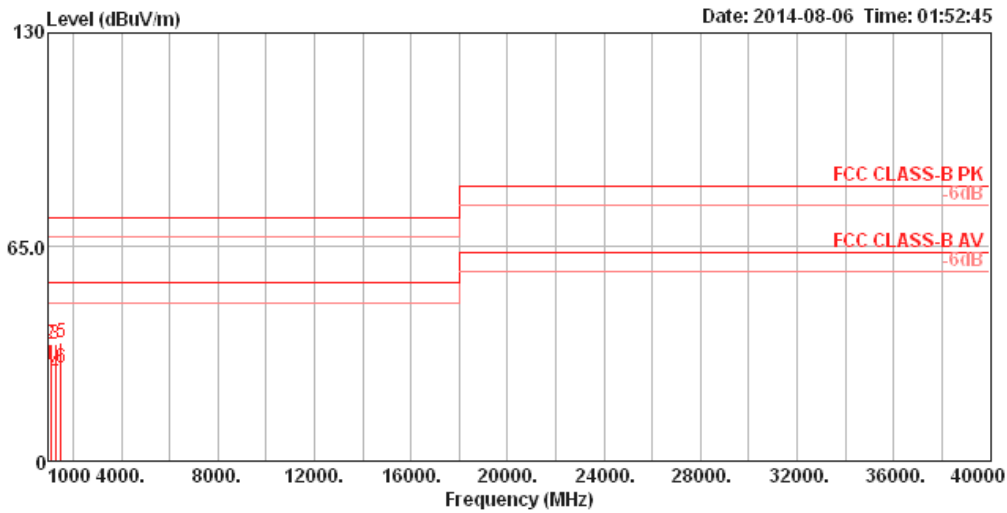

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1087.54	29.25	54.00	-24.75	40.97	2.38	23.89	37.99	100	105	HORIZONTAL	Average
2	1087.70	35.72	74.00	-38.28	47.44	2.38	23.89	37.99	100	105	HORIZONTAL	Peak
3	1268.46	35.64	74.00	-38.36	45.89	2.60	24.78	37.63	100	75	HORIZONTAL	Peak
4	1268.92	26.29	54.00	-27.71	36.54	2.60	24.78	37.63	100	75	HORIZONTAL	Average
5	1498.34	35.83	74.00	-38.17	44.47	2.84	25.70	37.18	100	136	HORIZONTAL	Peak
6	1498.35	28.51	54.00	-25.49	37.15	2.84	25.70	37.18	100	136	HORIZONTAL	Average

Vertical

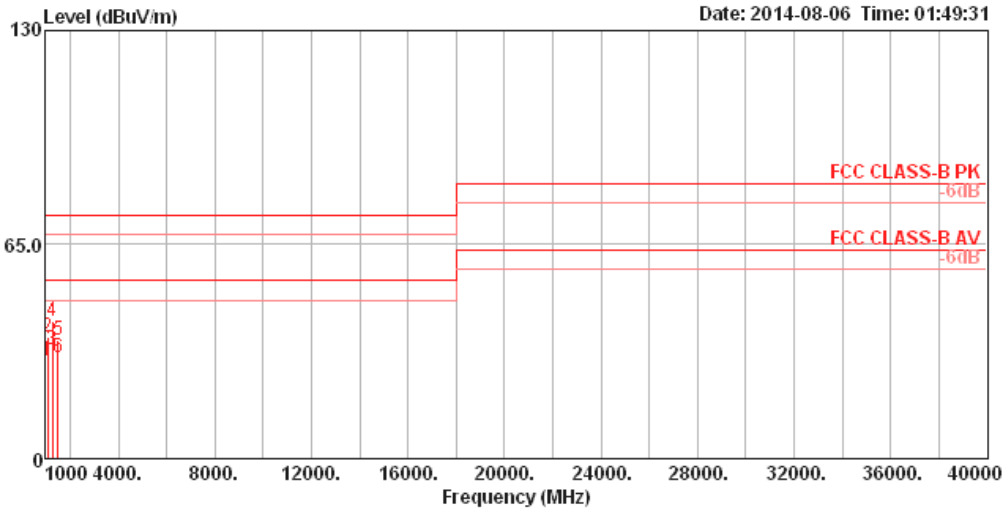

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1087.40	29.80	54.00	-24.20	41.52	2.38	23.89	37.99	100	237 VERTICAL	Average
2	1087.62	36.81	74.00	-37.19	48.53	2.38	23.89	37.99	100	237 VERTICAL	Peak
3	1268.83	33.33	54.00	-20.67	43.58	2.60	24.78	37.63	100	325 VERTICAL	Average
4	1268.91	41.71	74.00	-32.29	51.96	2.60	24.78	37.63	100	325 VERTICAL	Peak
5	1495.37	36.07	74.00	-37.93	44.74	2.84	25.68	37.19	100	326 VERTICAL	Peak
6	1500.11	30.67	54.00	-23.33	39.31	2.84	25.70	37.18	100	326 VERTICAL	Average