

## FCC RADIO TEST REPORT

Applicant's company	Belkin International, Inc.
Applicant Address	12045 East Waterfront Drive, Playa Vista, CA 90094
FCC ID	K7SF9K1118V1

Product Name	AC1800 DB Wi-Fi Dual-Band AC+ Gigabit Router
Brand Name	Belkin
Model Name	F9K1118v1
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Aug. 22, 2012
Final Test Date	Sept. 07, 2012
Submission Type	Original Equipment
Operating Mode	Master



### Statement

Test result included is for the IEEE 802.11n, IEEE 802.11a and IEEE 802.11ac (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart E** and KDB 558074 – 20120118 & KDB662911 D01-20110404.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE.....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION.....</b>	<b>3</b>
3.1. Product Details .....	3
3.2. Accessories .....	5
3.3. Table for Filed Antenna .....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. Test Configurations.....	11
<b>4. TEST RESULT.....</b>	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement .....	14
4.2. 99% Occupied Bandwidth Measurement.....	20
4.3. Maximum Conducted Output Power Measurement.....	28
4.4. Power Spectral Density Measurement.....	41
4.5. Peak Excursion Measurement .....	47
4.6. Radiated Emissions Measurement.....	52
4.7. Band Edge Emissions Measurement.....	69
4.8. Frequency Stability Measurement.....	77
4.9. Antenna Requirements .....	79
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>80</b>
<b>6. TEST LOCATION.....</b>	<b>82</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>83</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A28</b>
<b>APPENDIX B. TEST PHOTOS .....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>C1 ~ C3</b>
<b>APPENDIX D. CO-LOCATION REPORT.....</b>	<b>D1 ~ D3</b>


## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR283047AA	Rev. 01	Initial issue of report	Sept. 13, 2012

## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : AC1800 DB Wi-Fi Dual-Band AC+ Gigabit Router  
**Brand Name** : Belkin  
**Model Name** : F9K1118v1  
**Applicant** : Belkin International, Inc.  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 22, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



**Jordan Hsiao**

**SPORTON INTERNATIONAL INC.**

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.33 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.27 dB
4.4	15.407(a)	Power Spectral Density	Complies	4.66 dB
4.5	15.407(a)	Peak Excursion	Complies	3.71 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.44 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.02 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK/QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Frequency Range	5150 ~ 5250MHz
Channel Number	8 for 20MHz bandwidth ; 4 for 40MHz bandwidth
Channel Band Width (99%)	11n: MCS0 (20MHz): 17.52 MHz ; MCS0 (40MHz): 36.96 MHz 11ac : MCS0 (20MHz): 17.60 MHz ; MCS0 (40MHz): 36.96 MHz MCS0 (80MHz): 75.80 MHz
Conducted Output Power	11n: MCS0 (20MHz): 15.73 MHz ; MCS0 (40MHz): 15.69 MHz 11ac : MCS0 (20MHz): 15.66 dBm ; MCS0 (40MHz): 15.48 dBm MCS0 (80MHz): 15.64 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

### IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	16.80 MHz
Conducted Output Power	11.08 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

### Antenna & Band width

Antenna	Single (TX)			Two (TX)			Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	X	X	X	V	X	X	V	X	X
IEEE 802.11n	X	X	X	V	V	X	V	V	X
IEEE 802.11ac	X	X	X	X	X	V	V	V	V

IEEE 802. 11a, 11n and 11ac Spec.

Worst Modulation Used for Conformance Testing				
IEEE 802.11 Protocol	Number of Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS	Worst Data Rate / MCS	Worst Modulation Mode
a	3	6-54 Mbps	6Mbps	11A5.2G-20M
n (HT20)	3	MCS 0-15	MCS 0	11N5.2G-20M
n (HT40)	3	MCS 0-15	MCS 0	11N5.2G-40M
ac (VHT20)	3	MCS 0-9	MCS 0-Nss1	11AC5.2G-20M
ac (VHT40)	3	MCS 0-9	MCS 0-Nss1	11AC5.2G-40M
ac (VHT80)	3	MCS 0-9	MCS 0-Nss1	11AC5.2G-80M
Note 1: IEEE Std. 802.11-2007 modulation consists of IEEE Std. 802.11a-1999.				
Note 2: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 400ns.				
Note 3: draft IEEE Std. 802.11ac-2012 modulation consists of VHT20, VHT40, VHT80 and VHT160. Then EUT support VHT80. (VHT: Very High Throughput).				

### 3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	Belkin	ML30-V120250-A1	INPUT: 120V~60Hz, 0.8A OUTPUT: 12V, 2.5A
Adapter 2	Belkin	DSA-30PFB-12 FUS 120250	INPUT: 100-240V~50/60Hz, 0.8A OUTPUT: +12V, 2.5A



### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		Remark
					2.4GHz	5GHz	
1	Airgain	M2445J-T2-G230S	PCB Antenna	NA	1.87	-	TX/RX
2	Airgain	M2445J-T0-G190S1	PCB Antenna	NA	2.80	-	TX/RX
3	Airgain	N5X20SC-T1-G190U	PCB Antenna	NA	-	5.49	TX/RX
4	Airgain	N5X20SC-T-B100U	PCB Antenna	NA	-	6.25	TX/RX
5	Airgain	N5X20SC-T-W250U	PCB Antenna	NA	-	6.25	TX/RX

Note: The EUT has five antennas, two for 2.4GHz and the others for 5GHz.

**For IEEE 802.11n mode (3TX/3RX):**


Ant. 3, Ant.4 and Ant.5 could transmit/receive simultaneously.

**For IEEE 802.11a mode (3TX/3RX):**

Ant. 3, Ant.4 and Ant.5 could transmit/receive simultaneously.

**For IEEE 802.11ac mode (3TX/3RX):**

Ant. 3, Ant.4 and Ant.5 could transmit/receive simultaneously.

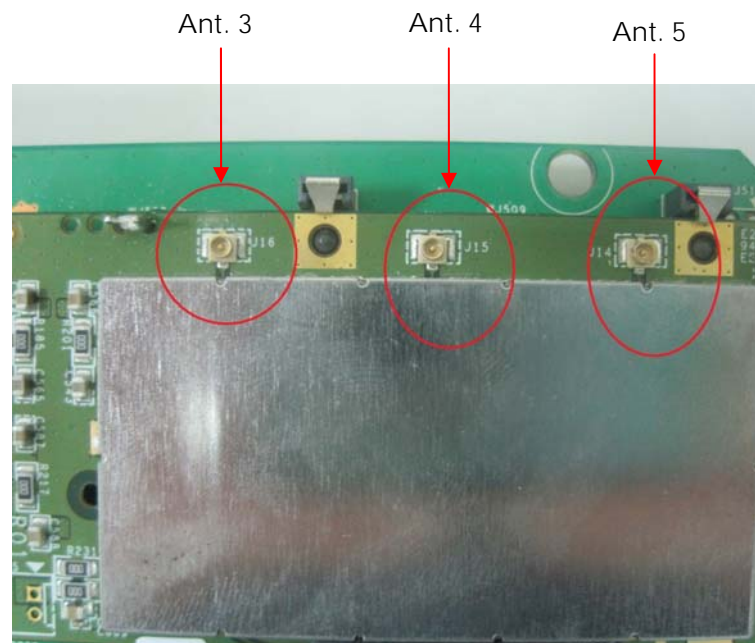

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems for the device.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal link		Auto	-	-
Max. Conducted Output Power	11n 20MHz	Band 1	7.2Mbps	36/40/48	3/4/5/3+4+5
	11n 40MHz	Band 1	15Mbps	38/46	3/4/5/3+4+5
	11ac 20MHz	Band 1	MCS0	36/40/48	3/4/5/3+4+5
	11ac 40MHz	Band 1	MCS0	38/46	3/4/5/3+4+5
	11ac 80MHz	Band 1	MCS0	42	3/4/5/3+4+5
	11a	Band 1	6Mbps	36/40/48	3/4/5/3+4+5
Power Spectral Density	11n 20MHz	Band 1	7.2Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	15Mbps	38/46	3+4+5
	11ac 20MHz	Band 1	MCS0	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	11n 20MHz	Band 1	7.2Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	15Mbps	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
Radiated Emission Below 1GHz	Normal link or CTX		Auto	-	-
Radiated Emission Above 1GHz	11n 20MHz	Band 1	7.2Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	15Mbps	38/46	3+4+5
	11ac 20MHz	Band 1	MCS0	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
Band Edge Emission	11n 20MHz	Band 1	7.2Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	15Mbps	38/46	3+4+5
	11ac 20MHz	Band 1	MCS0	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Put EUT upright with Adapter 1.

Mode 2. Put EUT upright with Adapter 2.

**For Radiated Emission below 1GHz test:**

Mode 1. Put EUT upright with Adapter 1.

Mode 2. Put EUT upright with Adapter 2.

**For Radiated Emission above 1GHz test**

Mode 1. Put EUT upright with Adapter 1 as representative.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Flash Disk	Silicon	D33B01	DoC
Flash Disk	Silicon	D33B02	DoC
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	D400	QDS-BRCM1005-D
Notebook	DELL	E6220	N/A
Notebook	DELL	M1330	E2K4965AGNM

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Manual tool 1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	40.00	40.00	40.00

#### Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	Manual tool 1.0.0.10	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	39.00	39.00

#### Power Parameters of IEEE 802.11a

Test Software Version	Manual tool 1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a	26.00	25.00	25.00

#### Power Parameters of IEEE 802.11ac MCS0 20MHz

Test Software Version	Manual tool 0.0.0.9		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	40.00	39.00	40.00

#### Power Parameters of IEEE 802.11ac MCS0 40MHz

Test Software Version	Manual tool 0.0.0.9	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	38.00	39.00

#### Power Parameters of IEEE 802.11ac MCS0NSS1 80MHz


Test Software Version	Manual tool 0.0.0.9
Frequency	5210 MHz
MCS0 80MHz	40.00

During the test, "Manual tool 1.0.0.10 and Manual Tool Version 0.0.0.9 " under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

### 3.9. Test Configurations


#### 3.9.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

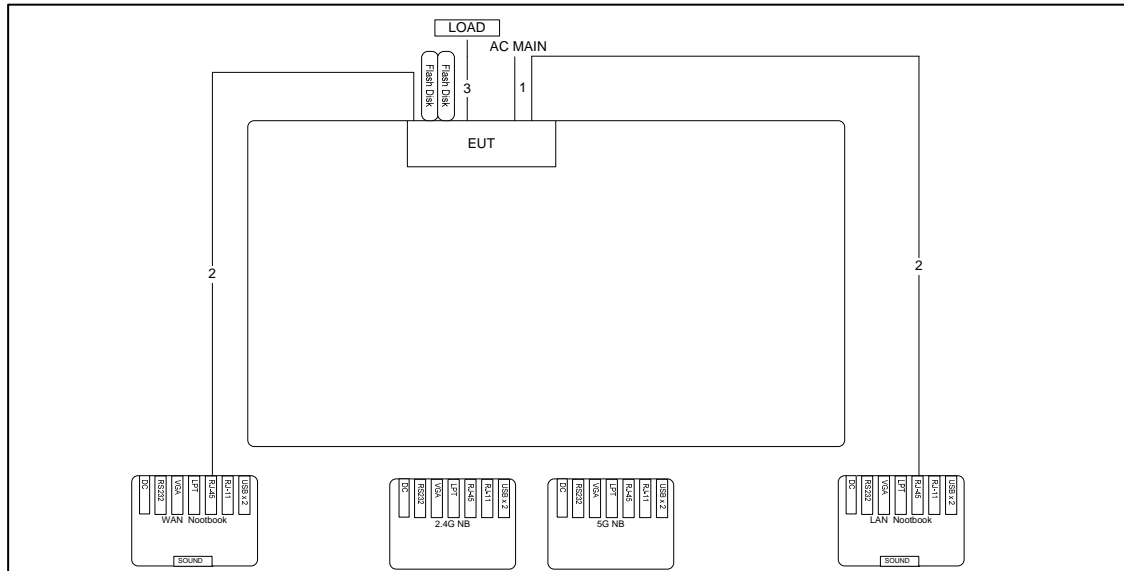


Item	Connection	Shield	Length
1	Power cable	No	1.8M
2	RJ-45 cable	No	10M
3	RJ-45 cable*3	No	1.5M

Test Configuration: above 1GHz

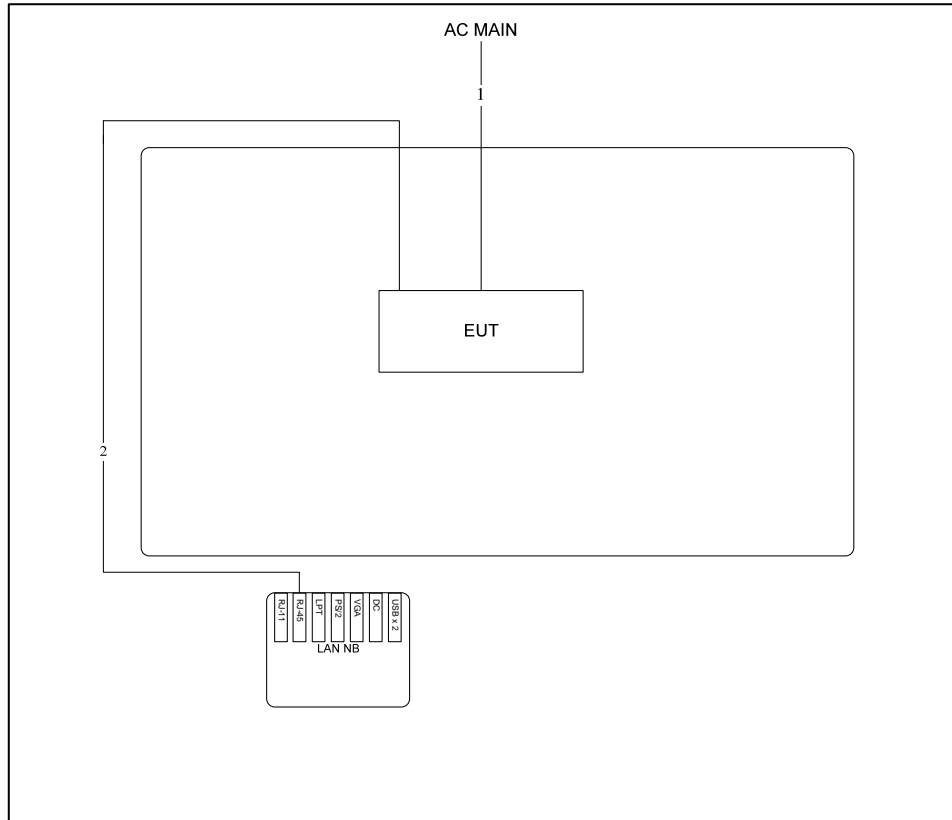

Item	Connection	Shield	Length
1	Power cable	No	1.8M
2	RJ-45 cable	No	10M

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

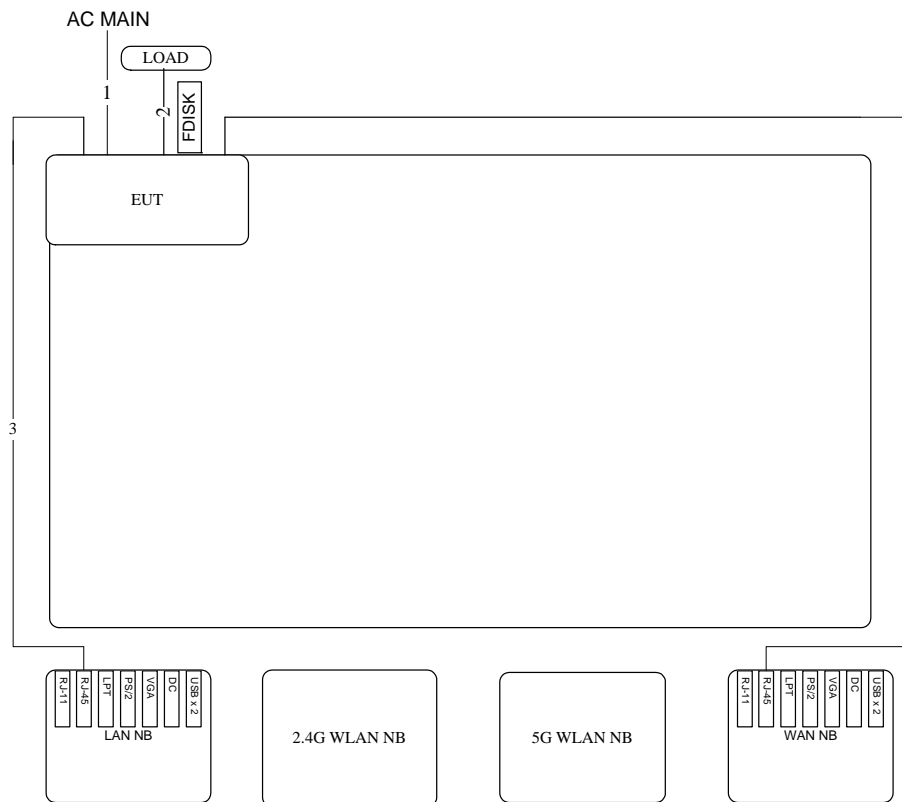

Item	Connection	Shield	Length
1	Power cable	No	1.5M
2	RJ-45 cable	No	1.5M
3	RJ-45 cable	No	10M
4	RJ-45 cable*3	No	10M



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

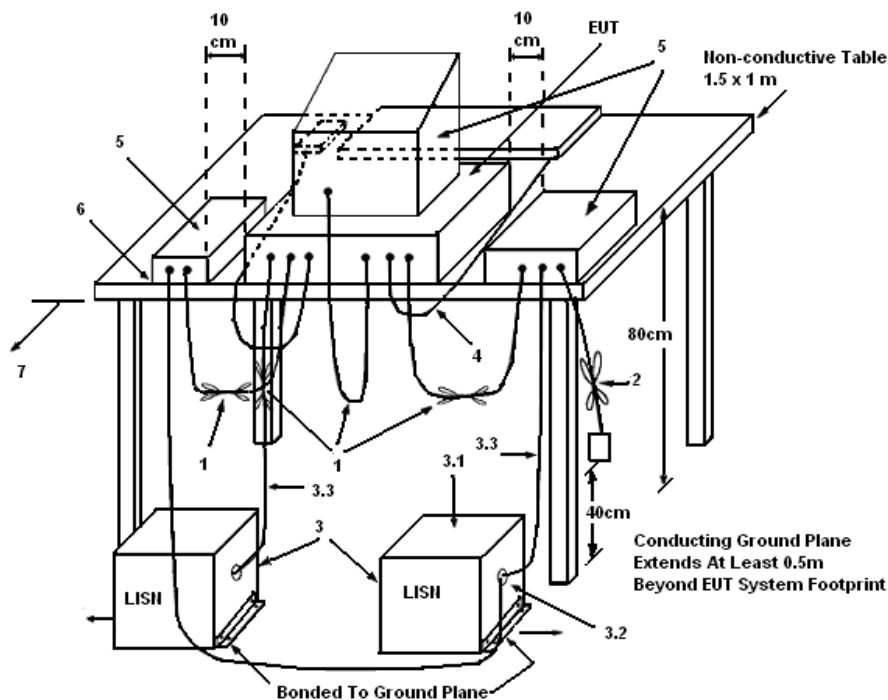

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	63%
Test Engineer	Ryo Fan	Phase	Line
Configuration	Normal Link, Mode 1		

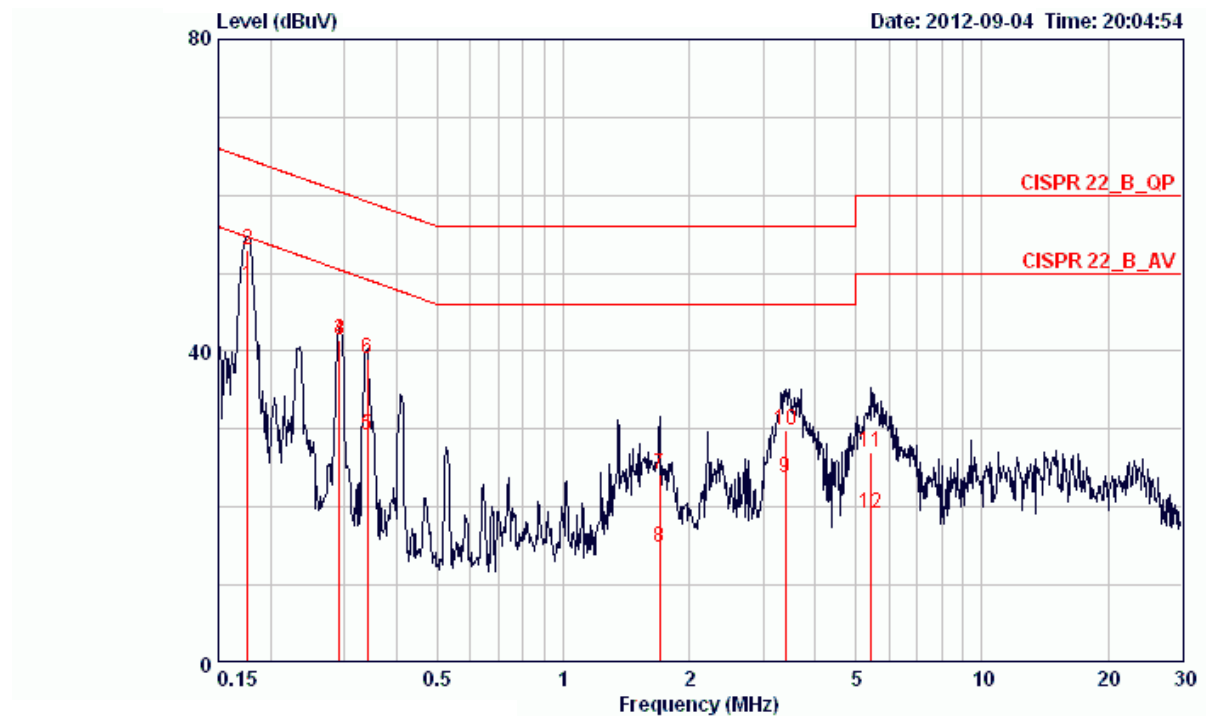

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
			dB	dBuV	dBuV	dB	dB		
1	0.17584	48.35	-6.33	54.68	48.00	0.15	0.20	LINE	AVERAGE
2	0.17584	53.04	-11.64	64.68	52.69	0.15	0.20	LINE	QP
3	0.29243	41.46	-19.00	60.46	41.11	0.15	0.20	LINE	QP
4	0.29243	41.34	-9.12	50.46	40.99	0.15	0.20	LINE	AVERAGE
5	0.34100	29.16	-20.02	49.18	28.81	0.15	0.20	LINE	AVERAGE
6	0.34100	38.97	-20.21	59.18	38.62	0.15	0.20	LINE	QP
7	1.698	24.18	-31.82	56.00	23.85	0.18	0.14	LINE	QP
8	1.698	14.89	-31.11	46.00	14.56	0.18	0.14	LINE	AVERAGE
9	3.399	23.68	-22.32	46.00	23.19	0.21	0.28	LINE	AVERAGE
10	3.399	29.84	-26.16	56.00	29.35	0.21	0.28	LINE	QP
11	5.447	27.14	-32.86	60.00	26.59	0.25	0.30	LINE	QP
12	5.447	19.29	-30.71	50.00	18.74	0.25	0.30	LINE	AVERAGE

Temperature	24°C	Humidity	63%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	Normal Link, Mode 1		

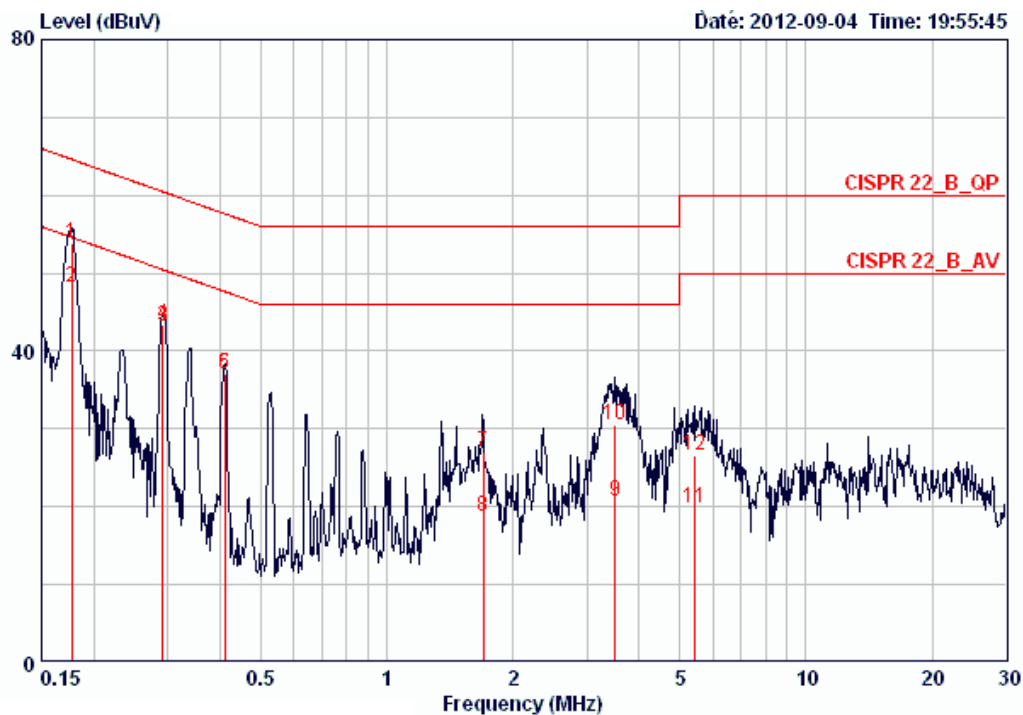


	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
			dB	dBuV	dBuV	dB	dB		
1	0.17678	53.83	-10.81	64.64	53.55	0.08	0.20	NEUTRAL	QP
2	0.17678	48.21	-6.43	54.64	47.93	0.08	0.20	NEUTRAL	AVERAGE
3	0.29243	43.24	-7.22	50.46	42.96	0.08	0.20	NEUTRAL	AVERAGE
4	0.29243	43.40	-17.06	60.46	43.12	0.08	0.20	NEUTRAL	QP
5	0.41048	37.11	-10.53	47.64	36.83	0.08	0.20	NEUTRAL	AVERAGE
6	0.41048	37.06	-20.58	57.64	36.78	0.08	0.20	NEUTRAL	QP
7	1.697	26.94	-29.06	56.00	26.69	0.10	0.14	NEUTRAL	QP
8	1.697	18.84	-27.16	46.00	18.59	0.10	0.14	NEUTRAL	AVERAGE
9	3.509	20.75	-25.25	46.00	20.33	0.13	0.30	NEUTRAL	AVERAGE
10	3.509	30.45	-25.55	56.00	30.03	0.13	0.30	NEUTRAL	QP
11	5.447	19.77	-30.23	50.00	19.31	0.16	0.30	NEUTRAL	AVERAGE
12	5.447	26.63	-33.37	60.00	26.17	0.16	0.30	NEUTRAL	QP

Note:


Level = Read Level + LISN Factor + Cable Loss.

Temperature	24°C	Humidity	63%
Test Engineer	Ryo Fan	Phase	Line
Configuration	Normal Link, Mode 2		

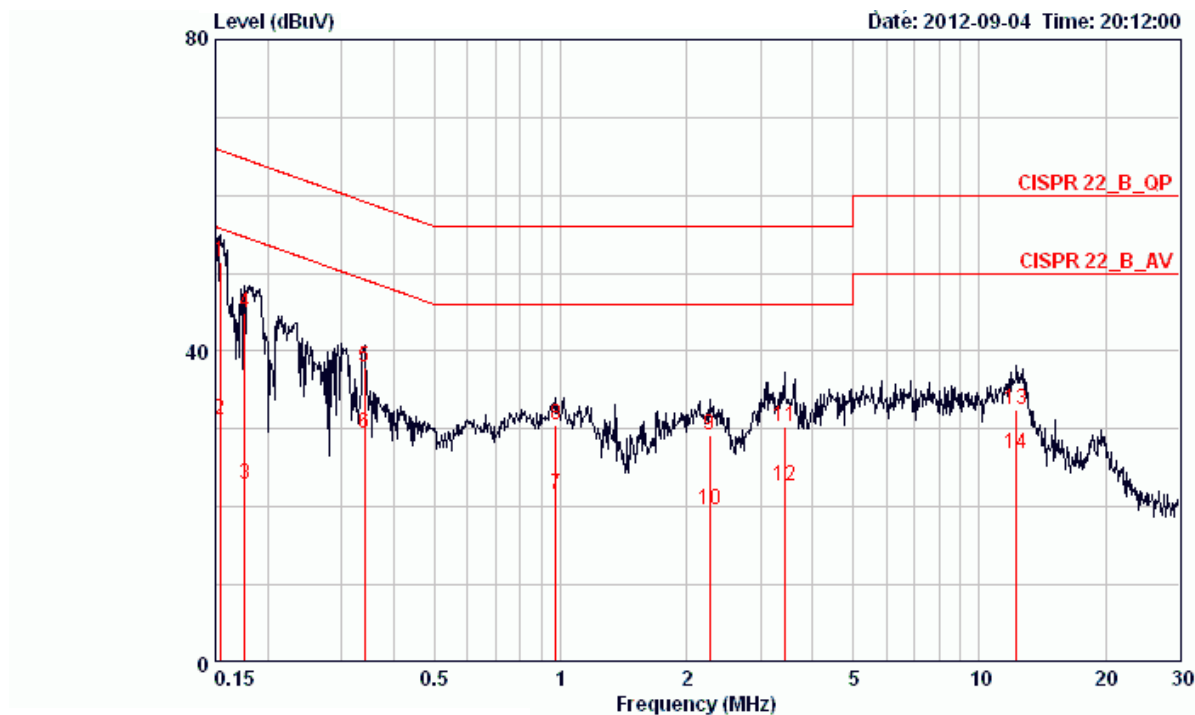

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15403	51.55	-14.23	65.78	51.19	0.16	0.20	LINE	QP
2	0.15403	31.15	-24.63	55.78	30.79	0.16	0.20	LINE	AVERAGE
3	0.17584	22.85	-31.83	54.68	22.50	0.15	0.20	LINE	AVERAGE
4	0.17584	44.80	-19.88	64.68	44.45	0.15	0.20	LINE	QP
5	0.34100	38.00	-21.18	59.18	37.65	0.15	0.20	LINE	QP
6	0.34100	29.48	-19.70	49.18	29.13	0.15	0.20	LINE	AVERAGE
7	0.97354	21.64	-24.36	46.00	21.27	0.17	0.20	LINE	AVERAGE
8	0.97354	30.43	-25.57	56.00	30.06	0.17	0.20	LINE	QP
9	2.273	29.22	-26.78	56.00	28.83	0.19	0.20	LINE	QP
10	2.273	19.62	-26.38	46.00	19.23	0.19	0.20	LINE	AVERAGE
11	3.417	30.35	-25.65	56.00	29.86	0.21	0.28	LINE	QP
12	3.417	22.65	-23.35	46.00	22.16	0.21	0.28	LINE	AVERAGE
13	12.253	32.46	-27.54	60.00	31.69	0.37	0.40	LINE	QP
14	12.253	26.82	-23.18	50.00	26.05	0.37	0.40	LINE	AVERAGE

Temperature	24°C	Humidity	63%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	Normal Link, Mode 2		

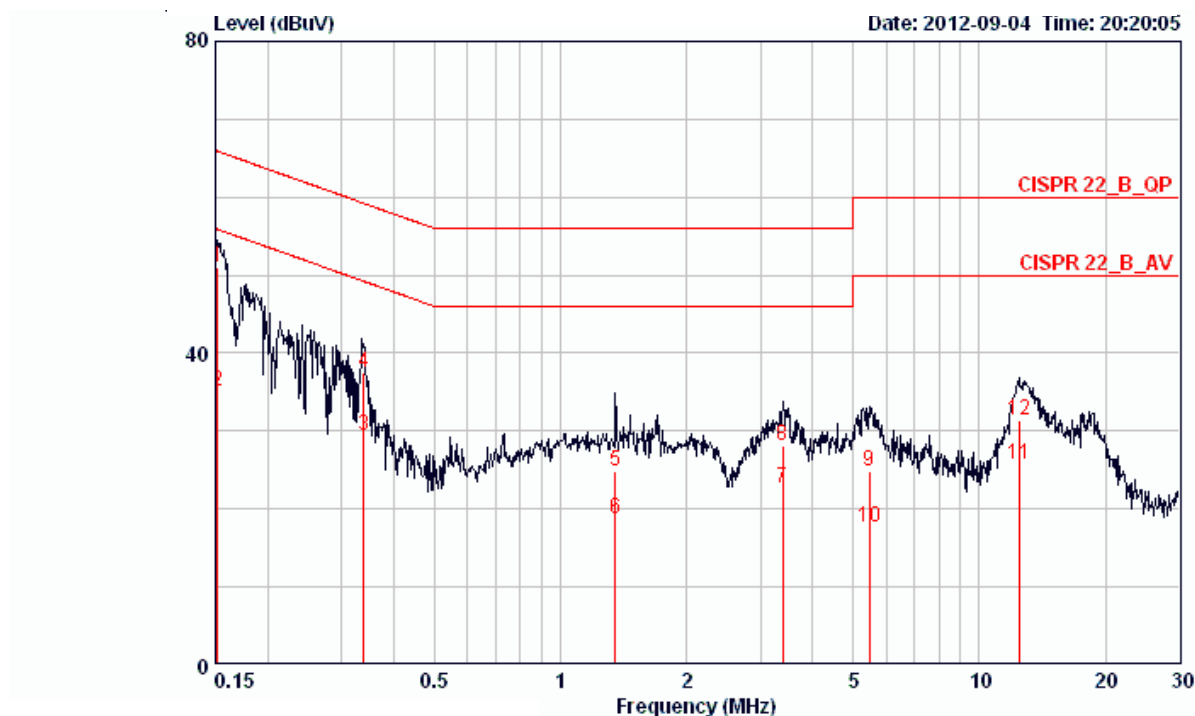

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15160	51.03	-14.88	65.91	50.75	0.08	0.20	NEUTRAL	QP
2	0.15160	35.17	-20.74	55.91	34.89	0.08	0.20	NEUTRAL	AVERAGE
3	0.33837	29.49	-19.75	49.24	29.21	0.08	0.20	NEUTRAL	AVERAGE
4	0.33837	37.55	-21.69	59.24	37.27	0.08	0.20	NEUTRAL	QP
5	1.352	24.92	-31.08	56.00	24.70	0.10	0.13	NEUTRAL	QP
6	1.352	18.70	-27.30	46.00	18.48	0.10	0.13	NEUTRAL	AVERAGE
7	3.399	22.70	-23.30	46.00	22.29	0.12	0.28	NEUTRAL	AVERAGE
8	3.399	28.12	-27.88	56.00	27.71	0.12	0.28	NEUTRAL	QP
9	5.476	24.79	-35.21	60.00	24.33	0.16	0.30	NEUTRAL	QP
10	5.476	17.57	-32.43	50.00	17.11	0.16	0.30	NEUTRAL	AVERAGE
11	12.449	25.64	-24.36	50.00	24.96	0.28	0.40	NEUTRAL	AVERAGE
12	12.449	31.45	-28.55	60.00	30.77	0.28	0.40	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

### 4.2.4. Test Setup Layout

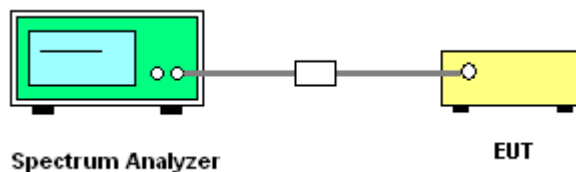

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n
Test Date	Sept. 06, 2012		

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.24	17.52
40	5200 MHz	20.08	17.52
48	5240 MHz	20.08	17.52

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	40.96	36.96
46	5230 MHz	40.64	36.96

Temperature	21°C	Humidity	56.4%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Sept. 06, 2012		

##### Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	19.28	16.80
40	5200 MHz	19.36	16.72
48	5240 MHz	19.36	16.72




Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Sept. 06, 2012		

Configuration IEEE 11ac MCS0 80MHz / Ant. 3 + Ant. 4 + Ant. 5


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	80.00	75.80

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5180 MHz

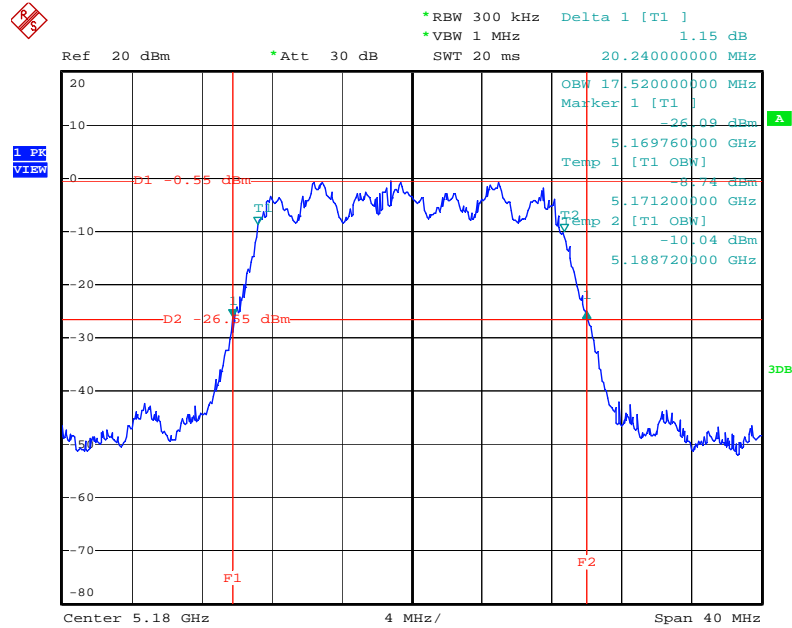


Date: 6.SEP.2012 21:41:41

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5200 MHz

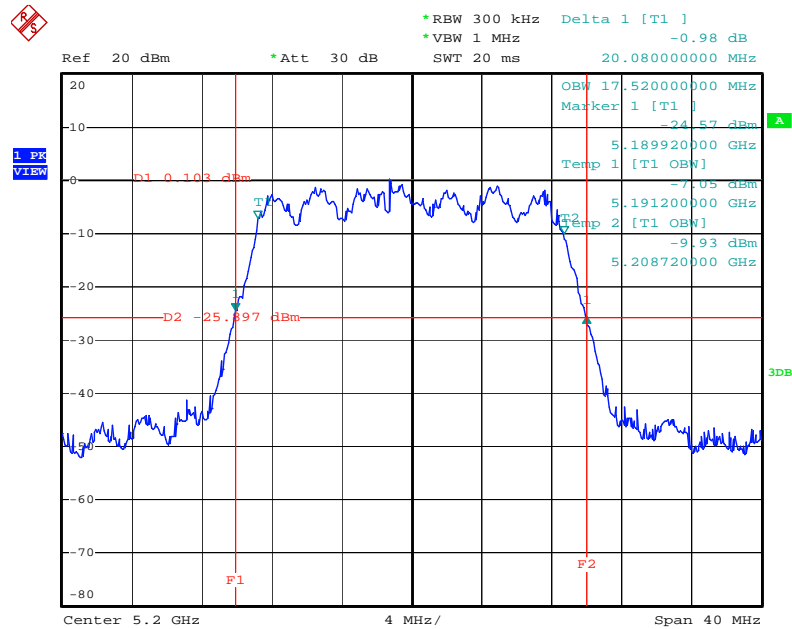


Date: 6.SEP.2012 21:42:23

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5240 MHz

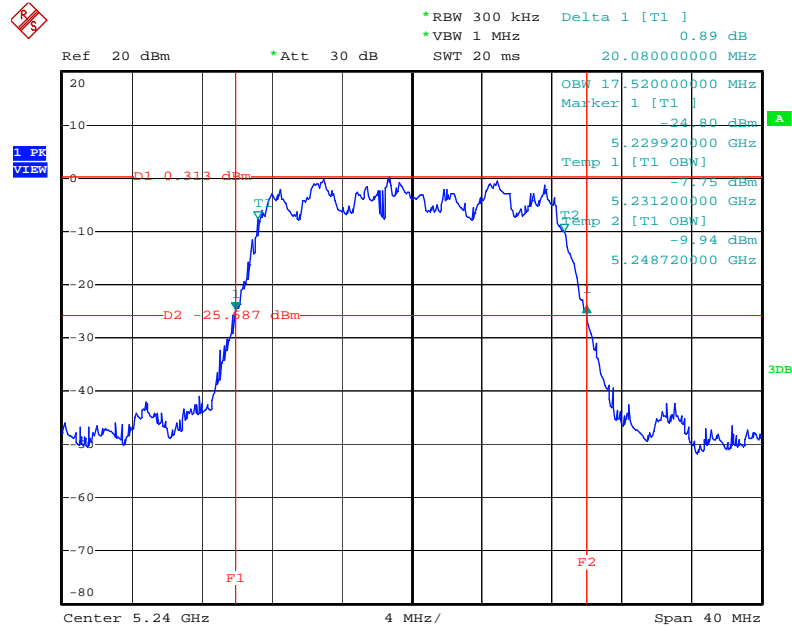


Date: 6.SEP.2012 21:42:50

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5190 MHz

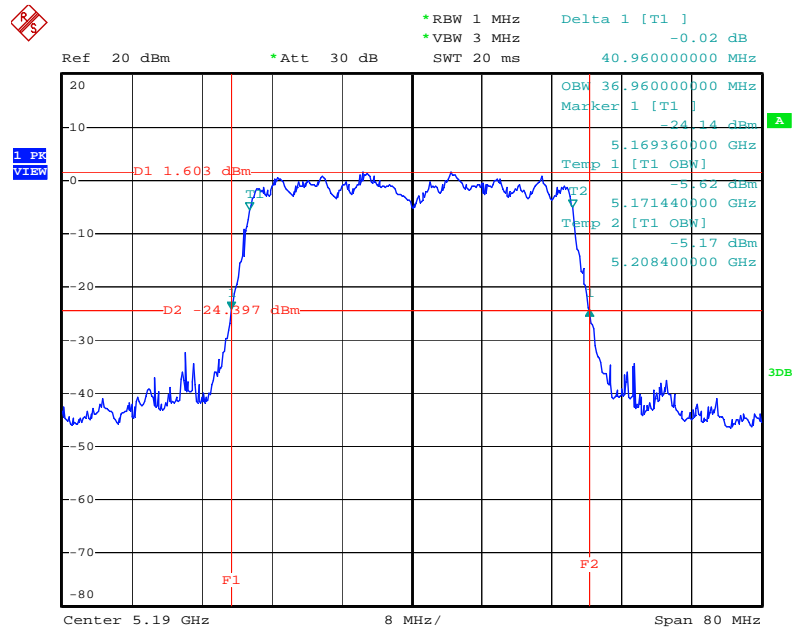


Date: 6.SEP.2012 21:43:51

### 26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5230 MHz

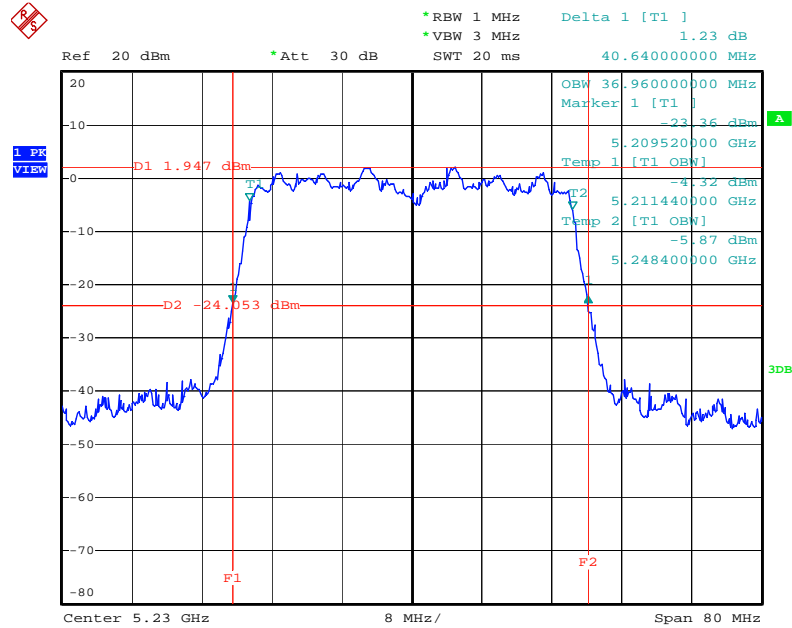


Date: 6.SEP.2012 21:44:24

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 / 5180 MHz

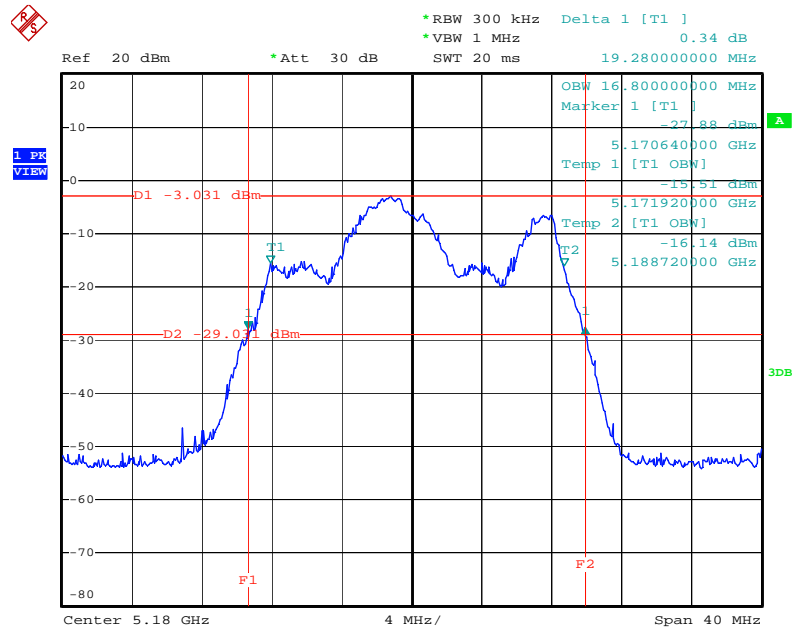


Date: 6.SEP.2012 21:54:25

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 / 5200 MHz

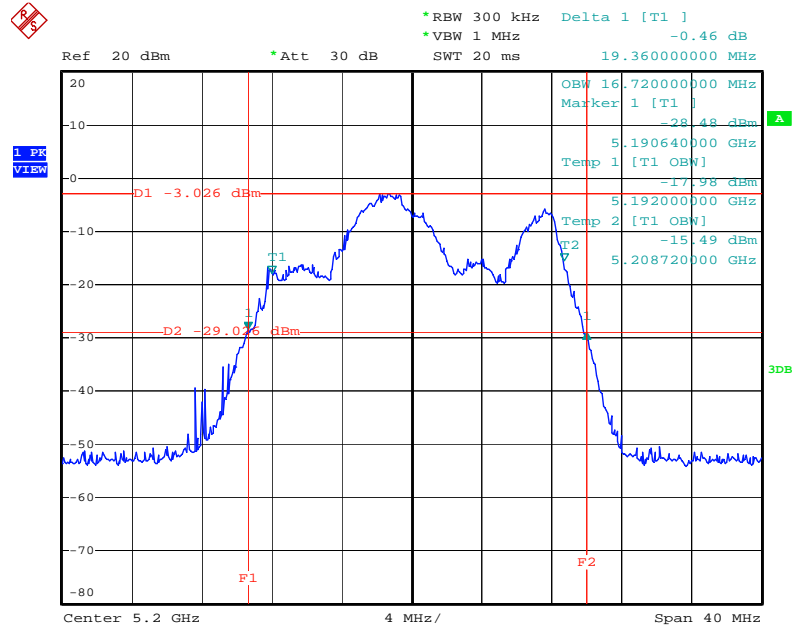


Date: 6.SEP.2012 21:55:47

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 / 5240 MHz

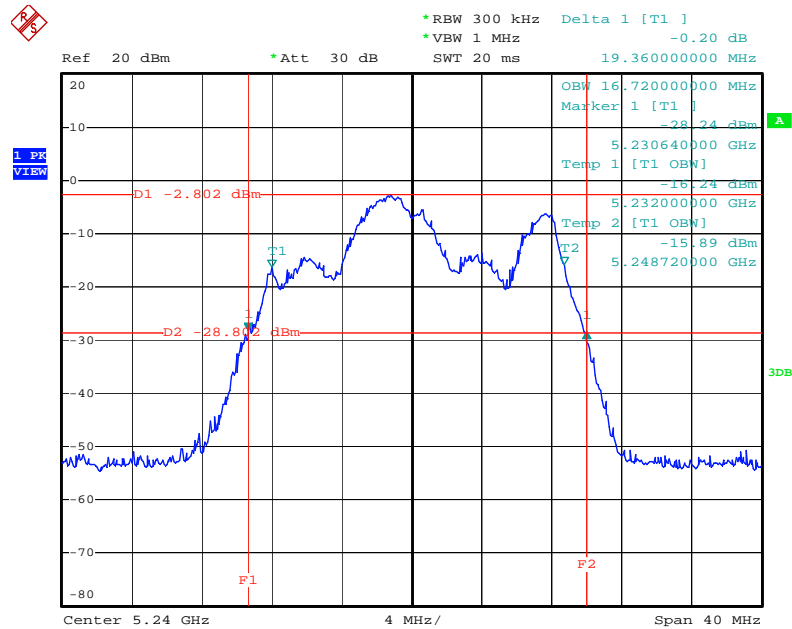

Date: 6.SEP.2012 21:58:52

# 26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 80MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5210 MHz

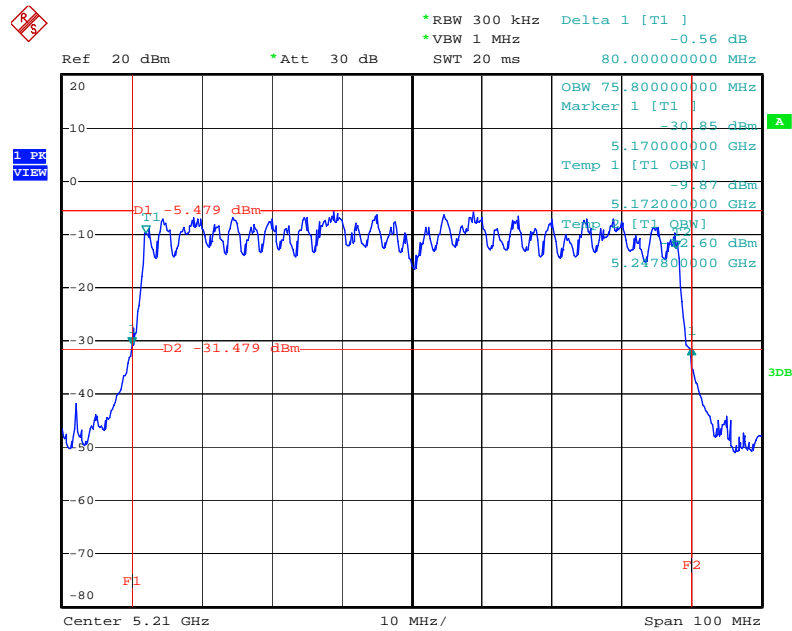

Date: 6.SEP.2012 21:28:11

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Average Sweep count 100
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power =>(4) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

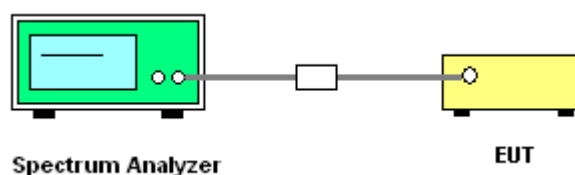

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n
Test Date	Sept. 06, 2012		

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant.5			
36	5180 MHz	10.33	11.23	10.79	15.57	16.75	Complies
40	5200 MHz	10.64	11.19	11.02	15.73	16.75	Complies
48	5240 MHz	10.07	10.95	11.17	15.53	16.75	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant.5			
38	5190 MHz	10.60	11.06	11.09	15.69	16.75	Complies
46	5230 MHz	10.16	11.02	11.36	15.65	16.75	Complies



Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Sept. 06, 2012		

#### Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant.5			
36	5180 MHz	6.00	6.55	6.32	11.07	12.07	Complies
40	5200 MHz	6.09	6.36	6.47	11.08	12.09	Complies
48	5240 MHz	5.59	6.42	6.43	10.94	12.09	Complies

NOTE: Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$  dBi  
=10.78dBi > 6dBi , so the conducted power limit =(17 or 4+10log B)-(10.78dBi-6).

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Sept. 06, 2012		

**Configuration IEEE 802.11ac MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5**

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant.5			
36	5180 MHz	10.59	11.19	10.76	15.63	16.75	Complies
40	5200 MHz	10.37	10.94	10.92	15.52	16.75	Complies
48	5240 MHz	10.35	11.07	11.20	15.66	16.75	Complies

**Configuration IEEE 802.11ac MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5**

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant.5			
38	5190 MHz	10.28	11.03	10.77	15.48	16.75	Complies
46	5230 MHz	10.03	10.90	11.13	15.48	16.75	Complies

**Configuration IEEE 802.11ac MCS0 80MHz / Ant. 3 + Ant. 4 + Ant. 5**

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant.5			
42	5210 MHz	10.43	11.08	11.06	15.64	16.75	Complies

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.



Ref 20 dBm \*Att 30 dB \*RBW 1 MHz \*VBW 3 MHz \*SWE 20 ms Marker 1 [T1] -0.42 dBm 5.201200000 GHz

Offset 2.5 dB

1.00 dB AVG

SWP 100 OF 100

Center 5.2 GHz 3 MHz/ Span 30 MHz

Tx Channel Bandwidth 20 MHz Power 10.37 dBm

Ref 20 dBm      \*Att 30 dB      Marker 1 [T1] 0.47 dBm  
 SWT 20 ms      5.178980000 GHz

Offset 2.5 dB

1.19 dBm  
 Avg


SWP 100 of 100

Center 5.18 GHz      3 MHz/      Span 30 MHz

**Tx Channel**  
 Bandwidth 20 MHz      Power 11.19 dBm


Page No. : 32 of 83  
Issued Date : Sept. 13, 2012

### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 5 / 5240 MHz

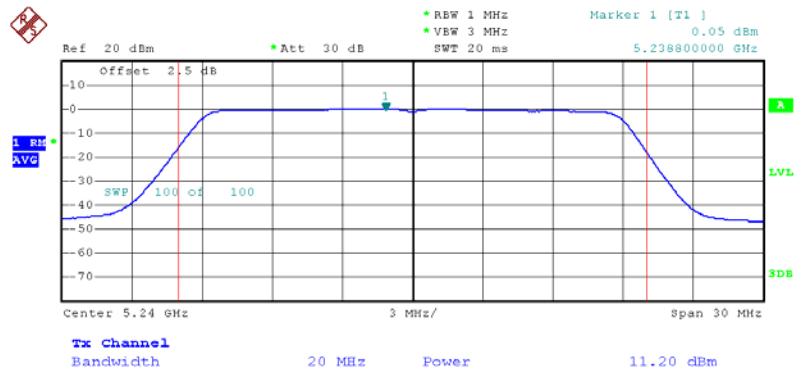

Date: 6.SEP.2012 21:13:58

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 / 5190 MHz

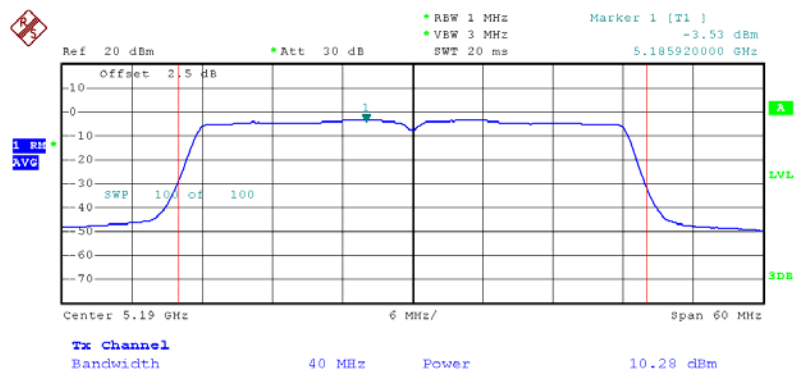

Date: 6.SEP.2012 21:04:13



The screenshot shows a Spectrum Analyzer interface. At the top, a status bar displays various settings: Ref 20 dBm, Att 30 dB, RBW 1 MHz, VBW 3 MHz, SWT 20 ms, Marker 1 [T1] at -2.81 dBm, and a frequency of 5.184480000 GHz. The main display area shows a blue trace of a signal with a 6 MHz bandwidth. The trace is centered at 5.19 GHz. The y-axis represents power in dBm, ranging from -70 to -10. The x-axis represents frequency in MHz, ranging from 5.19 GHz to 5.196 GHz. A green cursor is positioned at the peak of the signal, indicating a power level of -2.81 dBm. The signal has a bandwidth of 6 MHz and a power of 11.03 dBm. The trace shows a flat top with a slight dip in the center, characteristic of a modulated signal. The background is a grid with major lines every 10 dB and minor lines every 1 dB. The overall appearance is that of a professional measurement instrument.

Ref 20 dBm    Att 30 dB    RBW 1 MHz    VBW 3 MHz    SWT 20 ms    Marker 1 [T1]    -2.81 dBm    5.184480000 GHz

Offset 2.5 dB

1.00 dBm AVG

SWP 100.00


Center 5.19 GHz    6 MHz/    Span 60 MHz

**Tx Channel**  
 Bandwidth 40 MHz    Power 11.03 dBm

The screenshot displays a Spectrum Analyzer interface. At the top, a status bar shows: Ref 20 dBm, Att 30 dB, RBW 1 MHz, VBW 3 MHz, SWT 20 ms, Marker 1 [1], -3.19 dBm, and 5.185200000 GHz. The main plot area shows a signal spectrum with a blue trace. The x-axis is labeled 'Center 5.19 GHz' and 'Span 60 MHz'. The y-axis is labeled 'Offset 2.5 dB' and 'dB'. The signal has a bandwidth of 6 MHz and a power of 10.77 dBm. The plot shows a signal with a 6 MHz bandwidth and a power of 10.77 dBm. The signal is centered at 5.19 GHz. The plot shows a signal with a 6 MHz bandwidth and a power of 10.77 dBm. The signal is centered at 5.19 GHz. The plot shows a signal with a 6 MHz bandwidth and a power of 10.77 dBm. The signal is centered at 5.19 GHz.


Issued Date : Sept. 13, 2012

### Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 3 / 5200 MHz

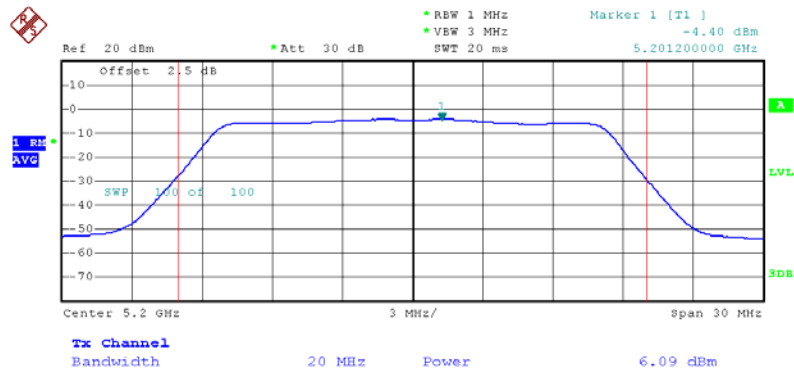


Date: 6.SEP.2012 20:08:53

### Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 4 / 5180 MHz

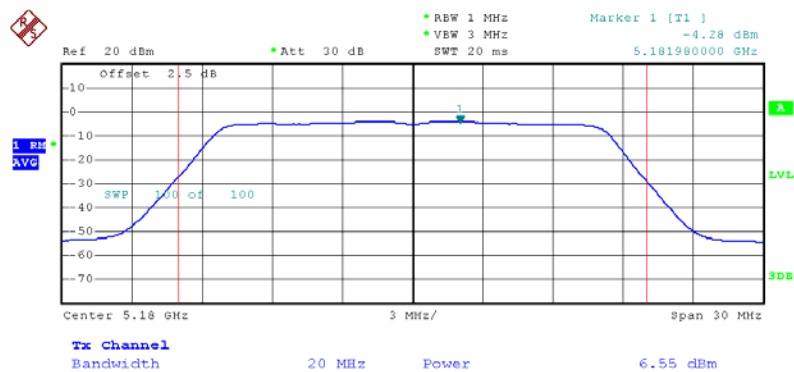


Date: 6.SEP.2012 20:00:34

### Conducted Output Power Plot on Configuration IEEE 802.11a / Ant. 5 / 5200 MHz

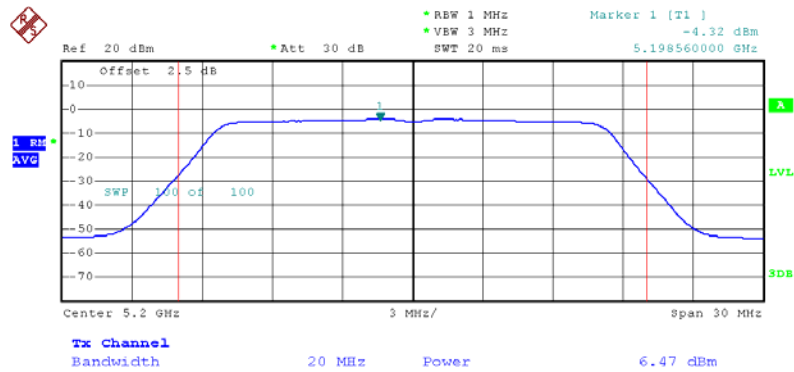

Date: 6.SEP.2012 20:07:29

### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 20MHz / Ant. 3 / 5180 MHz

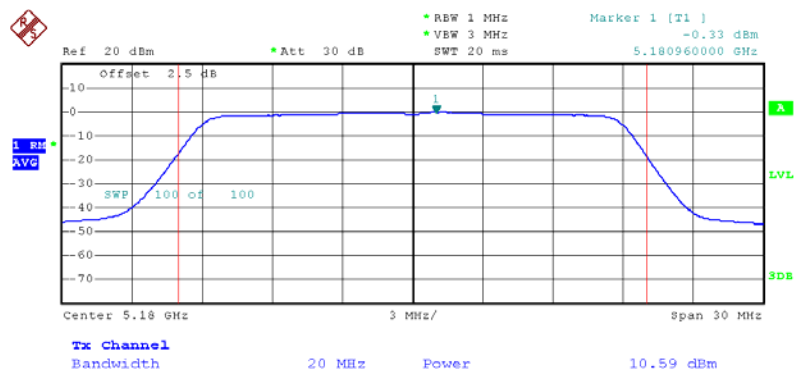

Date: 6.SEP.2012 21:06:29



Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 0.47 dBm 5.178980000 GHz

Offset 2.5 dB

1.00 dBm AVG

A

LVL

SDB

Center 5.18 GHz 3 MHz Span 30 MHz

Tx Channel

Bandwidth 20 MHz Power 11.19 dBm

Ref 20 dBm      \*Att 30 dB      \*RBW 1 MHz      Marker 1 [T1]      0.05 dBm  
SWT 20 ms      5.23880000 GHz

Offset 2.5 dB

1.00  
AVG

SWP 100 of 100

Center 5.24 GHz      3 MHz/      Span 30 MHz

Tx Channel  
Bandwidth 20 MHz      Power 11.20 dBm

Issued Date : Sept. 13, 2012





Ref 20 dBm Att 30 dB BW 20 ms 5.185920000 GHz

Offset 2.5 dB

1 dB AVG

SWP 100 OF 100


Center 5.19 GHz 6 MHz/ Span 60 MHz

Tx Channel Bandwidth 40 MHz Power 10.28 dBm

[illegible]


Issued Date : Sept. 13, 2012

### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 40MHz / Ant. 5 / 5240 MHz

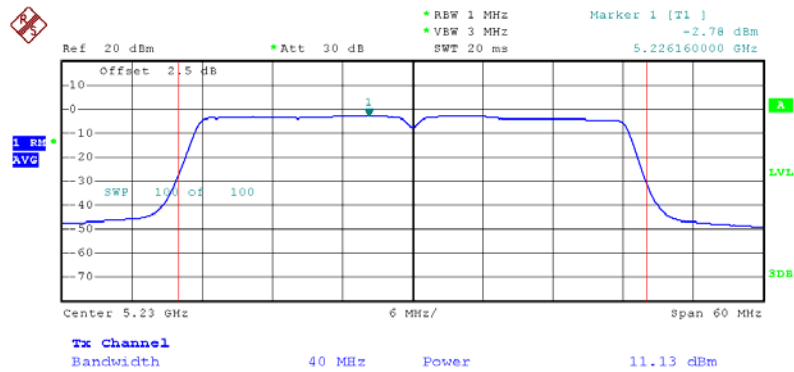


Date: 6.SEP.2012 20:58:42

### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 80MHz / Ant. 3 / 5210 MHz

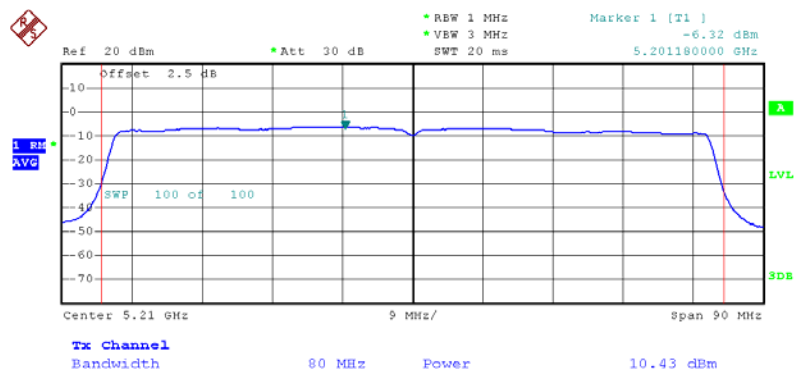


Date: 6.SEP.2012 21:18:14

### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 80MHz / Ant. 4 / 5210 MHz

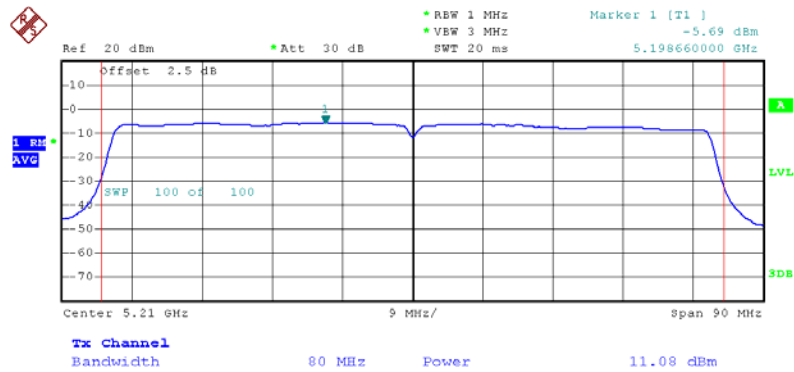

Date: 6.SEP.2012 21:17:44

### Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0 80MHz / Ant. 5 / 5210 MHz

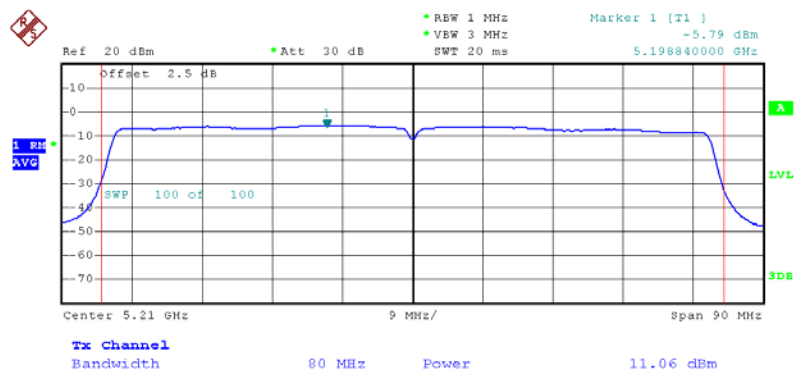

Date: 6.SEP.2012 21:17:06

#### 4.4. Power Spectral Density Measurement

##### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance with KDB 662911 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

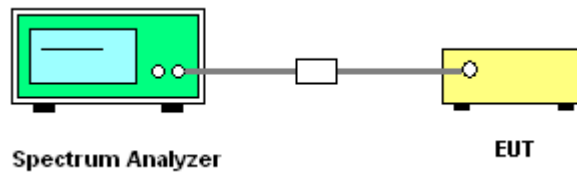

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n
Test Date	Sept. 06, 2012		

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	2.18	3.75	Complies
40	5200 MHz	2.27	3.75	Complies
48	5240 MHz	2.46	3.75	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	-0.73	3.75	Complies
46	5230 MHz	-0.52	3.75	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Sept. 06, 2012		

**Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5**

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	-2.19	-0.78	Complies
40	5200 MHz	-2.38	-0.78	Complies
48	5240 MHz	-1.96	-0.78	Complies

NOTE:  $\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N] \text{ dBi}$   
 $= 10.78 \text{ dBi} > 6 \text{ dBi}$ , so the band1 power density limit  $= 4 - (10.78 \text{ dBi} - 6) = -0.78 \text{ dBm}$

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Sept. 06, 2012		


**Configuration IEEE 802.11ac MCS0 80MHz / Ant. 3 + Ant. 4 + Ant. 5**

Channel	Frequency	Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
42	5210 MHz	-3.93	3.75	Complies


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

### Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5240 MHz

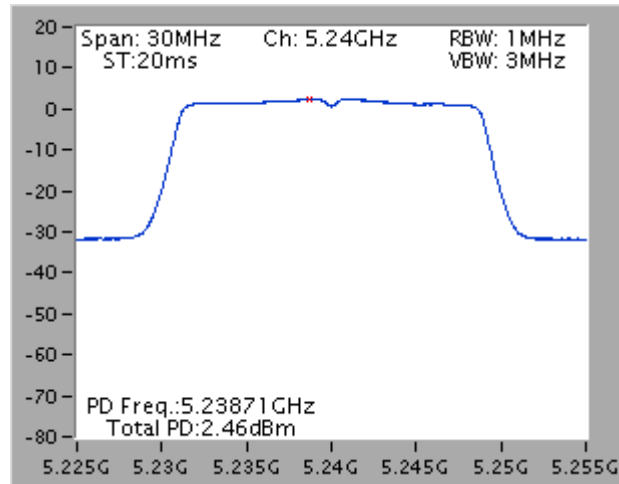


### Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5230 MHz

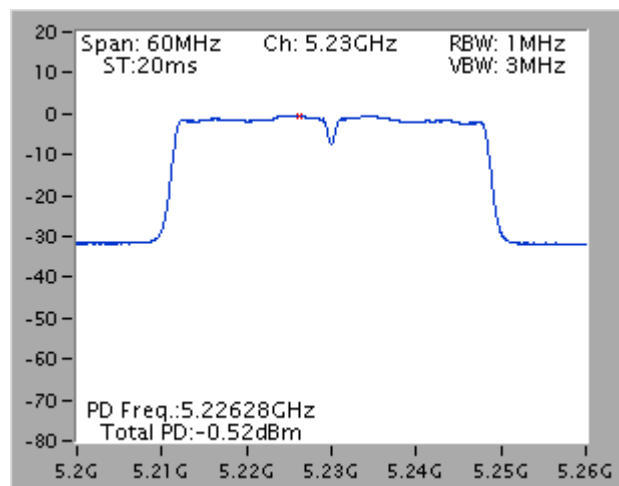




### Power Density Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 / 5240 MHz

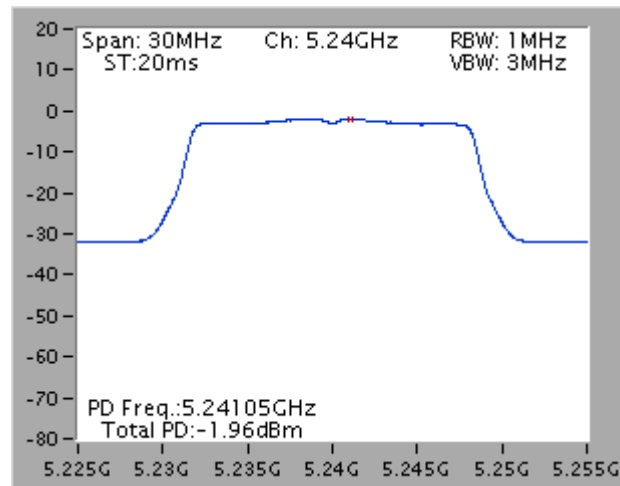

### Power Density Plot on Configuration IEEE 802.11ac MCS0 80MHz/ Ant. 3 + Ant. 4 + Ant. 5 / 5210 MHz

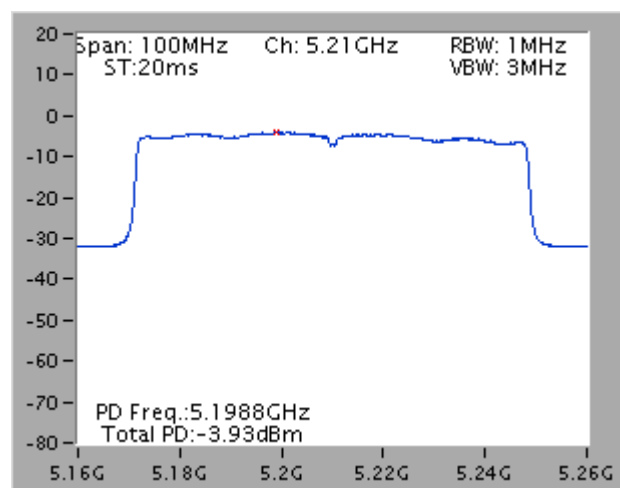

## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz (Peak Trace) / 1MHz (Average Trace)
VB	3MHz (Peak Trace) / 3MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS
Trace	Peak : Trace :Max hold/Average: Trace Average Sweep Count 100
Sweep Time	AUTO

### 4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n
Test Date	Sept. 07, 2012		

##### Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	8.96	13	Complies
40	5200 MHz	8.26	13	Complies
48	5240 MHz	8.27	13	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	9.06	13	Complies
46	5230 MHz	8.39	13	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Sept. 07, 2012		

#### Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	9.29	13	Complies
40	5200 MHz	8.96	13	Complies
48	5240 MHz	8.67	13	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Sept. 07, 2012		


#### Configuration IEEE 802.11ac MCS0 80MHz / Ant. 3 + Ant. 4 + Ant. 5

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
42	5210 MHz	8.96	13	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

### Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5180 MHz

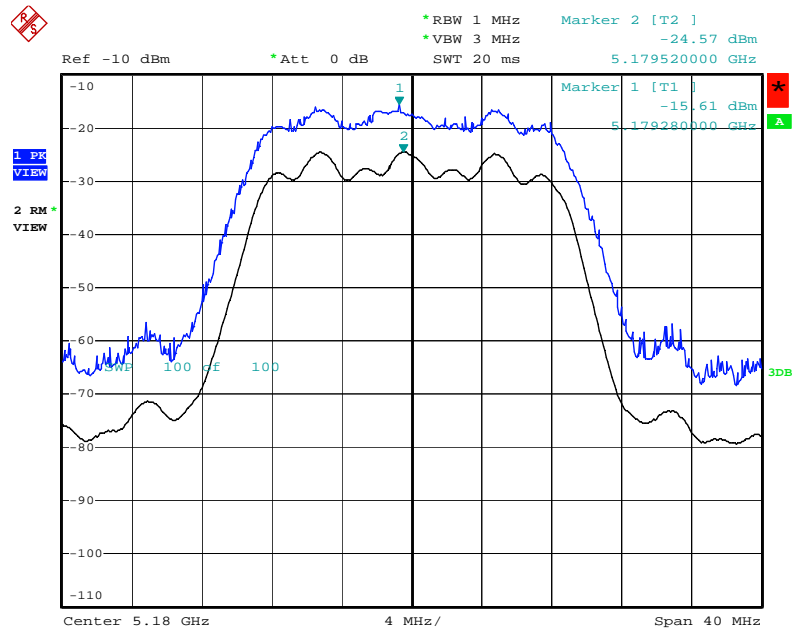


Date: 7.SEP.2012 01:09:03

### Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5190 MHz

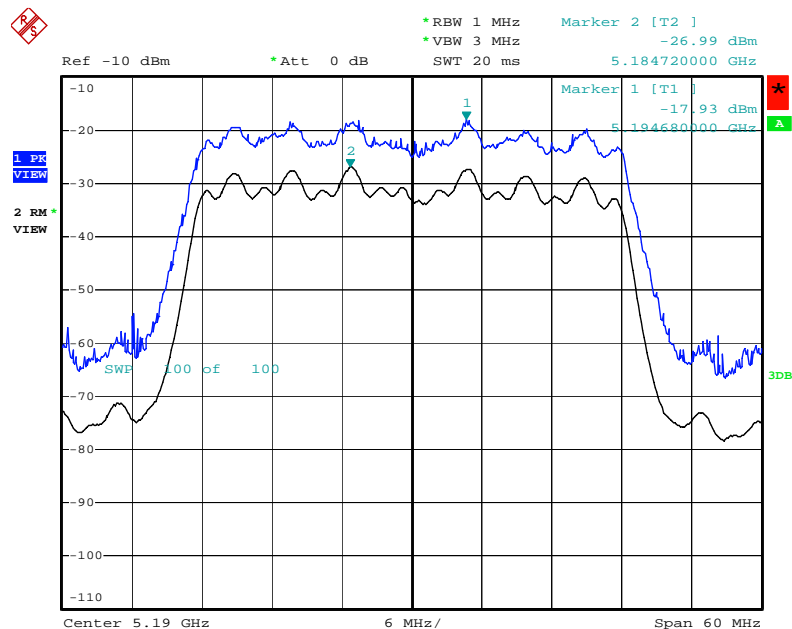


Date: 7.SEP.2012 01:06:54

### Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 / 5180 MHz

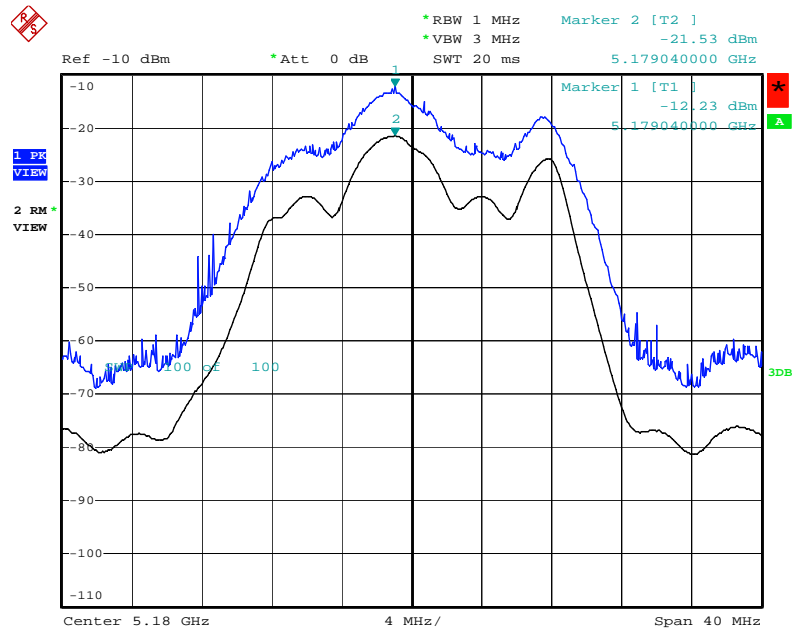

Date: 7.SEP.2012 01:14:28

### Peak Excursion Plot on Configuration IEEE 802.11ac MCS0 80MHz / Ant. 3 + Ant. 4 + Ant. 5 / 5210 MHz

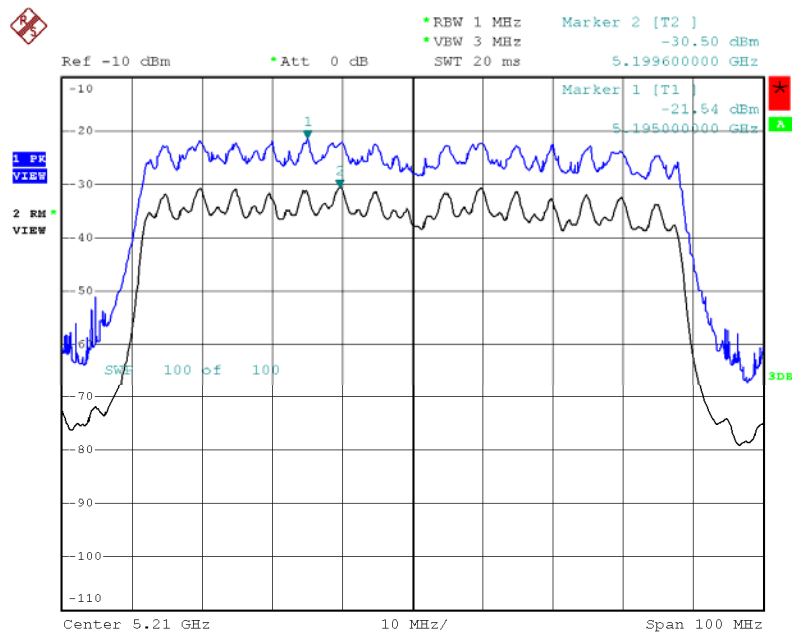

Date: 7.SEP.2012 01:05:50

#### 4.6. Radiated Emissions Measurement

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

##### 4.6.1. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP


#### 4.6.2. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.6.3. Test Setup Layout

For radiated emissions below 1GHz

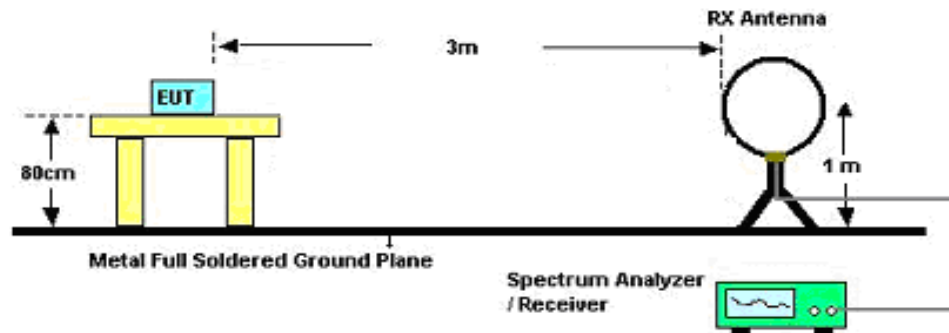

For radiated emissions above 1GHz

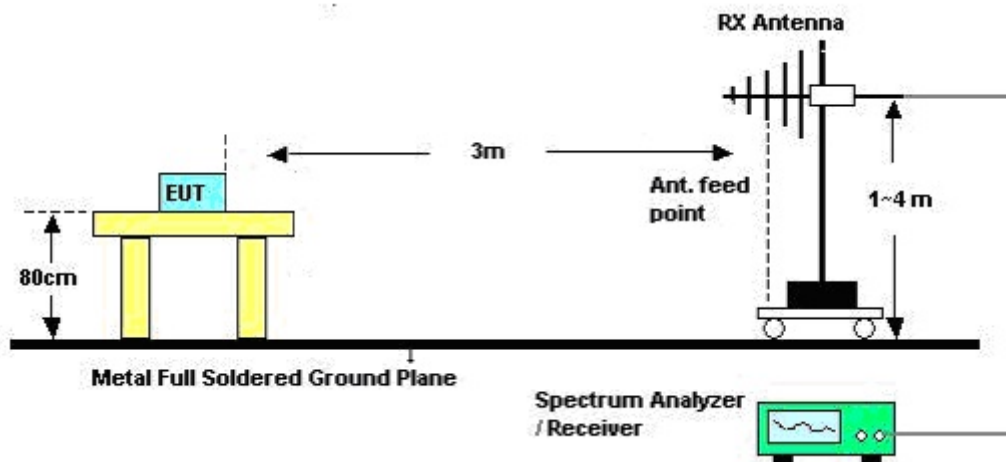

#### 4.6.4. Test Deviation

There is no deviation with the original standard.

#### 4.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	Normal Link
Test Date	Sept. 05, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.6.7. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	Normal Link/ Mode 1

Horizontal

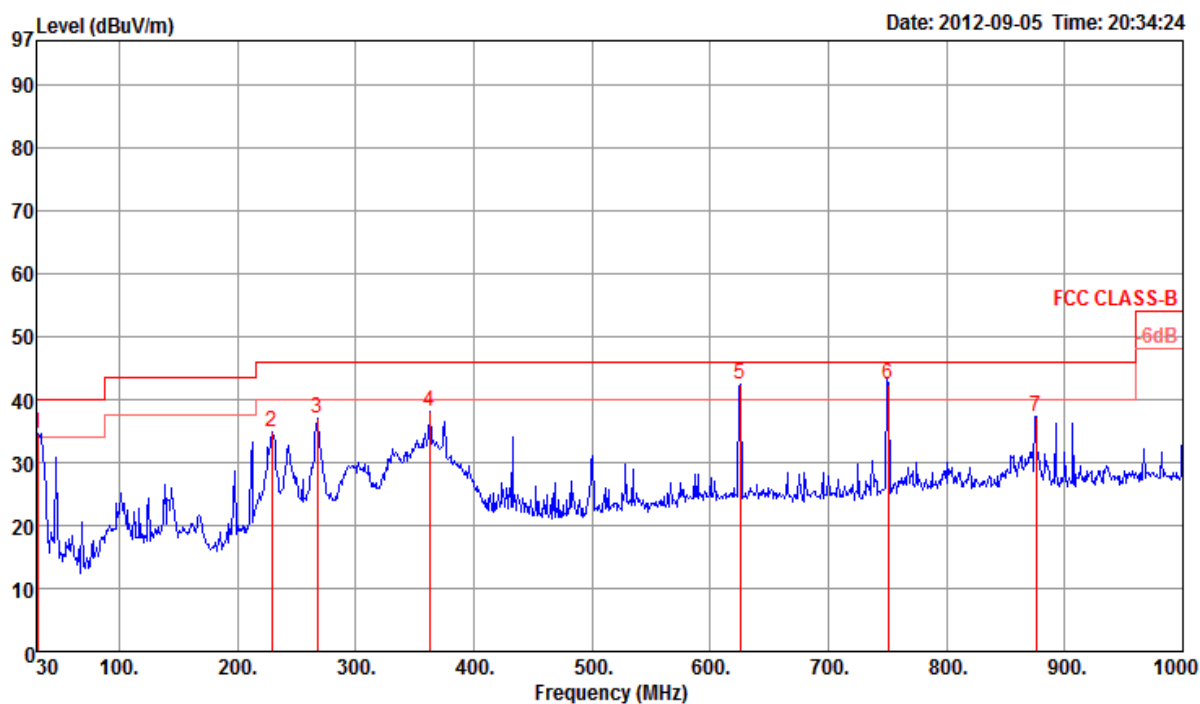

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		Pol/Phase	T/Pos	A/Pos	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark		deg	cm	Factor
1	30.97	34.61	40.00	-5.39	42.44	0.85	27.98	19.30	Peak	HORIZONTAL	0	400	0.00
2	228.85	34.86	46.00	-11.14	48.39	2.28	27.04	11.23	Peak	HORIZONTAL	0	400	0.00
3	267.65	37.00	46.00	-9.00	48.00	2.47	26.91	13.44	Peak	HORIZONTAL	0	400	0.00
4	362.71	38.01	46.00	-7.99	46.72	2.85	27.17	15.61	Peak	HORIZONTAL	0	400	0.00
5	625.58	42.48	46.00	-3.52	46.79	3.82	27.58	19.45	Peak	HORIZONTAL	0	400	0.00
6	750.71	42.39	46.00	-3.61	45.09	4.21	27.12	20.21	Peak	HORIZONTAL	0	400	0.00
7	875.84	37.39	46.00	-8.61	38.38	4.51	26.86	21.36	Peak	HORIZONTAL	0	400	0.00

# Vertical

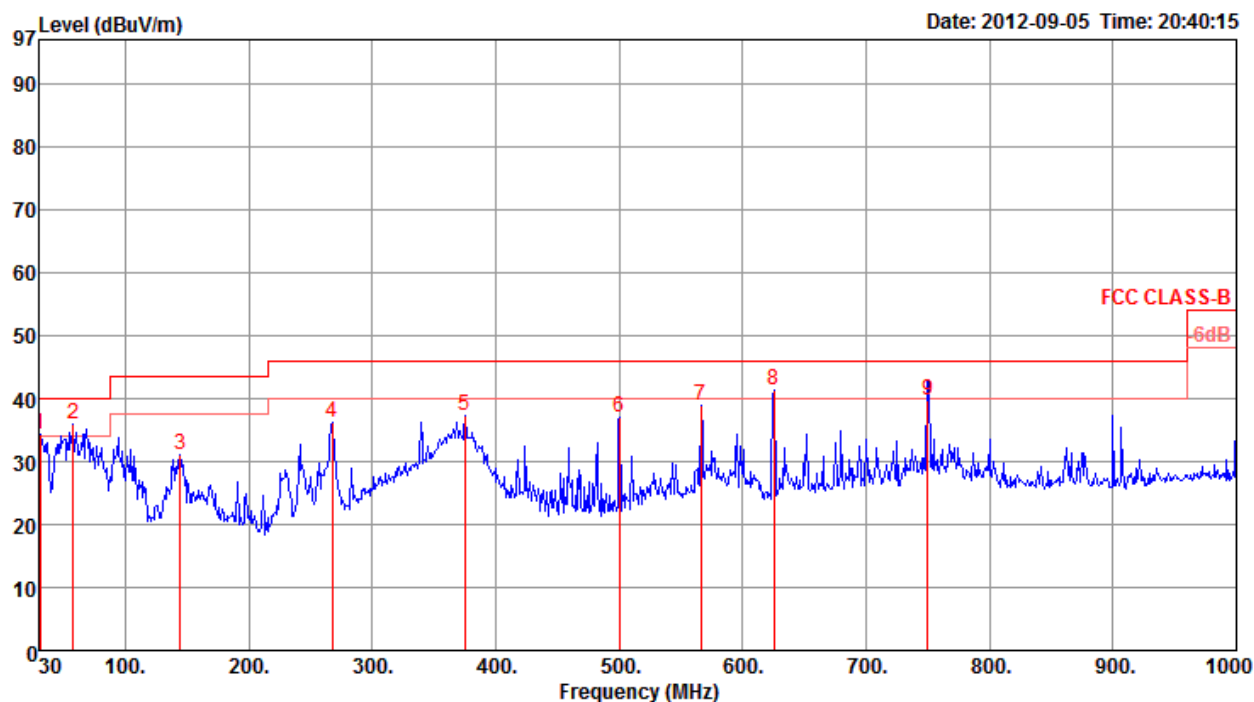

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	T/Pos	A/Pos	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor			deg	cm	Factor
1	30.97	34.25	40.00	-5.75	42.08	0.85	27.98	19.30	Peak	VERTICAL	0	100	0.00
2	58.13	35.96	40.00	-4.04	55.50	1.15	27.95	7.26	Peak	VERTICAL	0	100	0.00
3	144.46	31.15	43.50	-12.35	45.24	1.75	27.53	11.69	Peak	VERTICAL	0	100	0.00
4	267.65	36.33	46.00	-9.67	47.33	2.47	26.91	13.44	Peak	VERTICAL	0	100	0.00
5	375.32	37.27	46.00	-8.73	45.73	2.89	27.26	15.91	Peak	VERTICAL	0	100	0.00
6	500.45	37.04	46.00	-8.96	43.79	3.38	27.93	17.80	Peak	VERTICAL	0	100	0.00
7	566.41	38.83	46.00	-7.17	44.06	3.60	27.79	18.96	Peak	VERTICAL	0	100	0.00
8	625.58	41.39	46.00	-4.61	45.70	3.82	27.58	19.45	Peak	VERTICAL	0	100	0.00
9	750.00	39.59	46.00	-6.41	42.30	4.21	27.12	20.20	QP	VERTICAL	35	112	0.00

## Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	Normal Link/ Mode 2

Horizontal

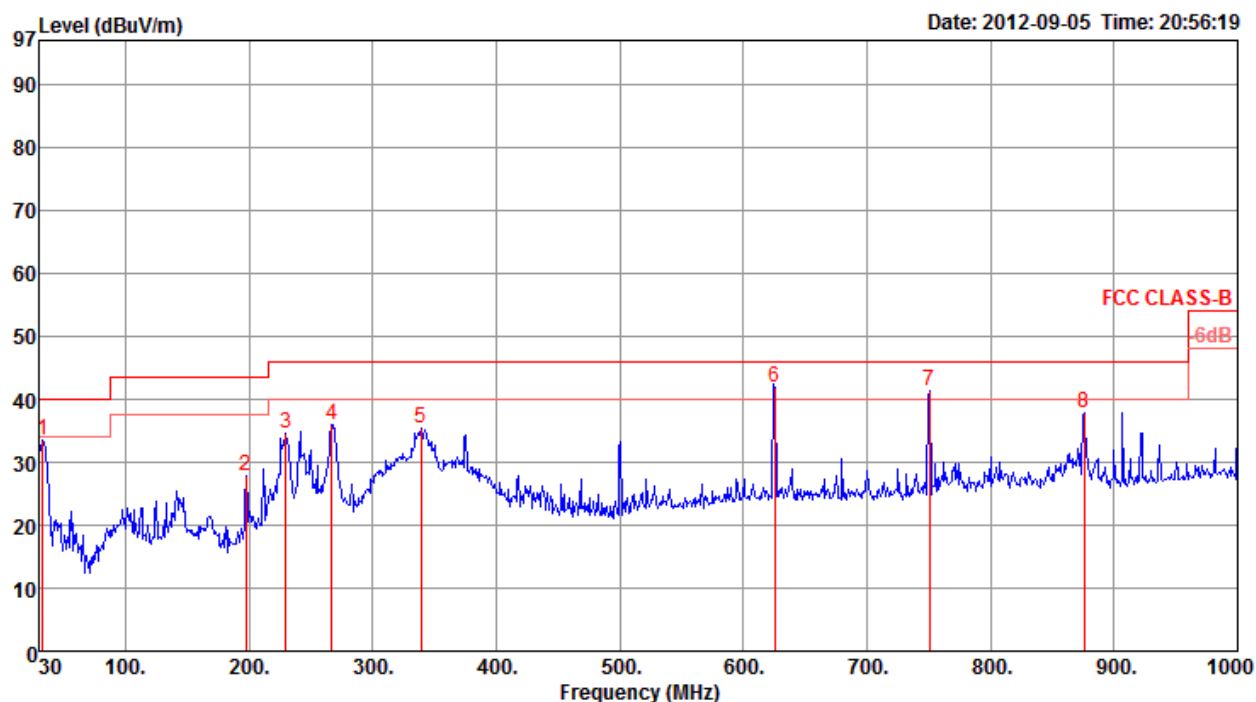

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	Pol/Phase	T/Pos	A/Pos	Aux
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor			deg	cm	Factor
				dB	dBuV	dB	dB	dB/m					dB
1	32.91	33.48	40.00	-6.52	42.49	0.88	27.99	18.10	Peak	HORIZONTAL	0	400	0.00
2	197.81	27.81	43.50	-15.69	42.71	2.08	27.26	10.28	Peak	HORIZONTAL	0	400	0.00
3	229.82	34.70	46.00	-11.30	48.15	2.28	27.03	11.30	Peak	HORIZONTAL	0	400	0.00
4	266.68	35.90	46.00	-10.10	46.88	2.47	26.91	13.46	Peak	HORIZONTAL	0	400	0.00
5	339.43	35.29	46.00	-10.71	44.58	2.74	27.01	14.98	Peak	HORIZONTAL	0	400	0.00
6	625.58	41.78	46.00	-4.22	46.09	3.82	27.58	19.45	Peak	HORIZONTAL	0	400	0.00
7	750.71	41.22	46.00	-4.78	43.92	4.21	27.12	20.21	Peak	HORIZONTAL	0	400	0.00
8	875.84	37.76	46.00	-8.24	38.75	4.51	26.86	21.36	Peak	HORIZONTAL	0	400	0.00

### Vertical

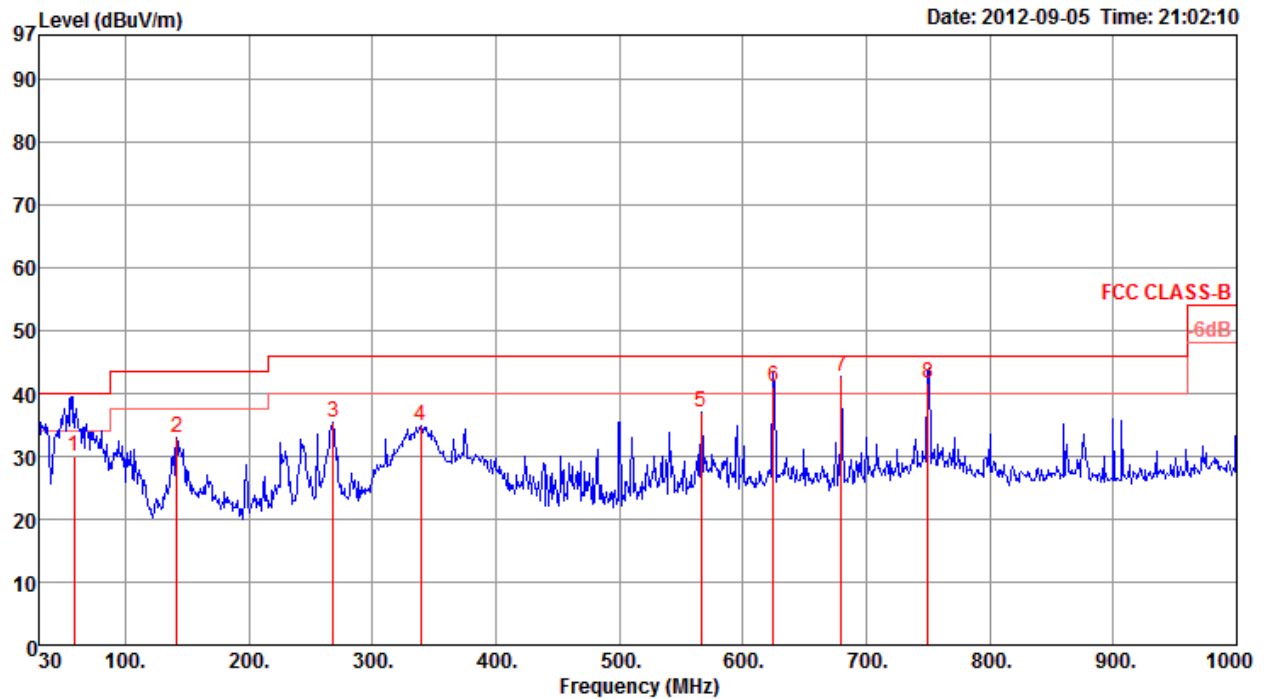

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	Pol/Phase	T/Pos	A/Pos	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m			deg	cm	dB
1	58.23	30.07	40.00	-9.93	49.61	1.15	27.95	7.26	QP	VERTICAL	273	100	0.00
2	141.55	33.01	43.50	-10.49	46.89	1.73	27.55	11.94	Peak	VERTICAL	0	100	0.00
3	268.62	35.51	46.00	-10.49	46.51	2.48	26.90	13.42	Peak	VERTICAL	0	100	0.00
4	339.43	34.76	46.00	-11.24	44.05	2.74	27.01	14.98	Peak	VERTICAL	0	100	0.00
5	566.41	36.99	46.00	-9.01	42.22	3.60	27.79	18.96	Peak	VERTICAL	0	100	0.00
6	625.00	41.08	46.00	-4.92	45.40	3.81	27.58	19.45	QP	VERTICAL	257	100	0.00
7	679.90	42.56	46.00	-3.44	45.93	4.06	27.27	19.84	Peak	VERTICAL	0	100	0.00
8	750.00	41.64	46.00	-4.36	44.35	4.21	27.12	20.20	QP	VERTICAL	33	112	0.00

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.8. Results for Radiated Emissions (1GHz~40GHz)

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch 36 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15586.00	38.05	54.00	-15.95	29.64	6.13	37.61	35.33	Average	100	174	HORIZONTAL
2	15588.00	51.07	74.00	-22.93	42.66	6.13	37.61	35.33	Peak	100	174	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15537.40	50.17	74.00	-23.83	41.60	6.13	37.73	35.29	Peak	100	13	VERTICAL
2	15580.20	38.13	54.00	-15.87	29.72	6.13	37.61	35.33	Average	100	13	VERTICAL

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch 40 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15560.40	51.24	74.00	-22.76	42.79	6.13	37.63	35.31	100	188	HORIZONTAL
2	15635.60	38.75	54.00	-15.25	30.40	6.14	37.56	35.35	100	188	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15562.20	38.99	54.00	-15.01	30.52	6.13	37.65	35.31	100	315	VERTICAL
2	15647.40	51.12	74.00	-22.88	42.80	6.14	37.54	35.36	100	315	VERTICAL



Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch 48 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15712.60	51.41	74.00	-22.59	43.17	6.14	37.48	35.38	100	121	HORIZONTAL
2	15719.80	38.40	54.00	-15.60	30.17	6.14	37.48	35.39	100	121	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15695.60	38.40	54.00	-15.60	30.15	6.14	37.49	35.38	100	295	VERTICAL
2	15699.60	51.22	74.00	-22.78	42.97	6.14	37.49	35.38	100	295	VERTICAL

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz Ch 38 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15568.00	38.64	54.00	-15.36	30.21	6.13	37.63	35.33	100	255	HORIZONTAL
2	15609.00	51.28	74.00	-22.72	42.91	6.13	37.58	35.34	100	255	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15556.60	51.46	74.00	-22.54	42.99	6.13	37.65	35.31	100	125	VERTICAL
2	15561.00	38.65	54.00	-15.35	30.18	6.13	37.65	35.31	100	125	VERTICAL

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz Ch 46 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15656.80	38.32	54.00	-15.68	30.00	6.14	37.54	35.36	Average	100	240	HORIZONTAL
2	15716.60	50.70	74.00	-23.30	42.47	6.14	37.48	35.39	Peak	100	240	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15640.60	38.32	54.00	-15.68	30.00	6.14	37.54	35.36	Average	100	111	VERTICAL
2	15671.60	50.39	74.00	-23.61	42.09	6.14	37.53	35.37	Peak	100	111	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 36 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15534.72	39.22	54.00	-14.78	30.71	6.13	37.67	35.29	Average	100	13	HORIZONTAL
2	15545.68	52.73	74.00	-21.27	44.26	6.13	37.65	35.31	Peak	100	13	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15544.60	51.96	74.00	-22.04	43.45	6.13	37.69	35.31	Peak	100	354	VERTICAL
2	15546.16	39.28	54.00	-14.72	30.77	6.13	37.69	35.31	Average	100	354	VERTICAL

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 40 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15580.40	51.07	74.00	-22.93	42.66	6.13	37.61	35.33	Peak	100	239	HORIZONTAL
2	15621.00	39.14	54.00	-14.86	30.78	6.13	37.58	35.35	Average	100	239	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15559.40	39.31	54.00	-14.69	30.84	6.13	37.65	35.31	Average	100	127	VERTICAL
2	15639.40	51.71	74.00	-22.29	43.36	6.14	37.56	35.35	Peak	100	127	VERTICAL

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 48 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15705.60	38.62	54.00	-15.38	30.37	6.14	37.49	35.38	Average	100	223	HORIZONTAL
2	15736.00	51.57	74.00	-22.43	43.36	6.14	37.46	35.39	Peak	100	223	HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15691.40	38.85	54.00	-15.15	30.60	6.14	37.49	35.38	Average	100	352	VERTICAL
2	15720.00	50.68	74.00	-23.32	42.45	6.14	37.48	35.39	Peak	100	352	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0 80MHz Ch 42 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15580.40	38.55	54.00	-15.45	30.14	6.13	37.61	35.33	Average	100	182 HORIZONTAL
2	15640.80	50.63	74.00	-23.37	42.31	6.14	37.54	35.36	Peak	100	182 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15594.00	50.91	74.00	-23.09	42.52	6.13	37.60	35.34	Peak	100	55 VERTICAL
2	15633.40	38.52	54.00	-15.48	30.17	6.14	37.56	35.35	Average	100	55 VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
- In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.



#### **4.7.4. Test Setup Layout**

This test setup layout is the same as that shown in section 4.6.4.

#### **4.7.5. Test Deviation**

There is no deviation with the original standard.

#### **4.7.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, 40, 48 /Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

##### Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5098.08	52.97	54.00	-1.03	15.97	3.42	33.58	0.00	Average	100	261 HORIZONTAL
2	5098.08	63.97	74.00	-10.03	26.97	3.42	33.58	0.00	Peak	100	261 HORIZONTAL
3	5178.40	99.65				3.44	33.73	0.00	Average	100	261 HORIZONTAL
4	5183.21	111.26				3.44	33.73	0.00	Peak	100	261 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5123.40	52.92	54.00	-1.08	15.88	3.43	33.61	0.00	Average	100	254 HORIZONTAL
2	5123.40	64.34	74.00	-9.66	27.30	3.43	33.61	0.00	Peak	100	254 HORIZONTAL
3	5198.40	112.02				3.45	33.76	0.00	Peak	100	254 HORIZONTAL
4	5198.72	101.30				3.45	33.76	0.00	Average	100	254 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4802.24	52.98	54.00	-1.02	16.70	3.29	32.99	0.00	Average	100	34 VERTICAL
2	4802.24	60.46	74.00	-13.54	24.18	3.29	32.99	0.00	Peak	100	34 VERTICAL
3	5238.40	102.36				3.46	33.82	0.00	Average	100	34 VERTICAL
4	5238.40	111.47				3.46	33.82	0.00	Peak	100	34 VERTICAL
5	5400.71	45.24	54.00	-8.76	7.61	3.51	34.12	0.00	Average	100	34 VERTICAL
6	5400.71	54.35	74.00	-19.65	16.72	3.51	34.12	0.00	Peak	100	34 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, 46 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

#### Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5148.40	52.96	54.00	-1.04	15.86	3.43	33.67	0.00	Average	100	253 HORIZONTAL
2	5148.40	66.70	74.00	-7.30	29.60	3.43	33.67	0.00	Peak	100	253 HORIZONTAL
3	5193.53	99.00				3.44	33.73	0.00	Average	100	253 HORIZONTAL
4	5203.78	110.77				3.45	33.76	0.00	Peak	100	253 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

#### Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5148.08	52.98	54.00	-1.02	15.88	3.43	33.67	0.00	Average	100	257 HORIZONTAL
2	5148.08	63.81	74.00	-10.19	26.71	3.43	33.67	0.00	Peak	100	257 HORIZONTAL
3	5233.21	100.12				3.46	33.82	0.00	Average	100	257 HORIZONTAL
4	5243.14	111.67				3.46	33.82	0.00	Peak	100	257 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 36, 40, 48 / Ant. 3 + Ant. 4 + Ant. 5
Test Date	Aug. 22, 2012		

#### Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5101.28	52.86	54.00	-1.14	15.86	3.42	33.58	0.00	Average	100	247 HORIZONTAL
2	5101.92	63.07	74.00	-10.93	26.07	3.42	33.58	0.00	Peak	100	247 HORIZONTAL
3	5181.28	99.77				3.44	33.73	0.00	Average	100	247 HORIZONTAL
4	5181.28	110.09				3.44	33.73	0.00	Peak	100	247 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

#### Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5122.12	63.41	74.00	-10.59	26.37	3.43	33.61	0.00	Peak	102	308 VERTICAL
2	5122.44	52.98	54.00	-1.02	15.94	3.43	33.61	0.00	Average	102	308 VERTICAL
3	5199.36	100.83				3.45	33.76	0.00	Average	102	308 VERTICAL
4	5199.68	110.97				3.45	33.76	0.00	Peak	102	308 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

#### Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4802.24	52.55	54.00	-1.45	16.27	3.29	32.99	0.00	Average	100	243 HORIZONTAL
2	4802.50	59.55	74.00	-14.45	23.27	3.29	32.99	0.00	Peak	100	243 HORIZONTAL
3	5241.60	104.61				3.46	33.82	0.00	Average	100	243 HORIZONTAL
4	5241.60	114.30				3.46	33.82	0.00	Peak	100	243 HORIZONTAL
5	5458.40	47.00	54.00	-7.00	9.29	3.52	34.19	0.00	Average	100	243 HORIZONTAL
6	5458.40	53.59	74.00	-20.41	15.88	3.52	34.19	0.00	Peak	100	243 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0 20MHz Ch 36, 40, 48 /Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

#### Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preampl Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5097.60	52.78	54.00	-1.22	15.78	3.42	33.58	0.00 Average	102	345	VERTICAL
2	5097.60	62.36	74.00	-11.64	25.36	3.42	33.58	0.00 Peak	102	345	VERTICAL
3	5180.40	102.20				3.44	33.73	0.00 Average	102	345	VERTICAL
4	5180.40	111.66				3.44	33.73	0.00 Peak	102	345	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

#### Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preampl Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5124.80	63.64	74.00	-10.36	26.60	3.43	33.61	0.00 Peak	100	13	VERTICAL
2	5125.20	52.77	54.00	-1.23	15.73	3.43	33.61	0.00 Average	100	13	VERTICAL
3	5200.40	101.78				3.45	33.76	0.00 Average	100	13	VERTICAL
4	5200.80	111.31				3.45	33.76	0.00 Peak	100	13	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

#### Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preampl Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4802.00	52.67	54.00	-1.33	16.39	3.29	32.99	0.00 Average	100	6	VERTICAL
2	4802.00	58.61	74.00	-15.39	22.33	3.29	32.99	0.00 Peak	100	6	VERTICAL
3	5236.00	111.21				3.46	33.82	0.00 Peak	100	6	VERTICAL
4	5240.00	102.28				3.46	33.82	0.00 Average	100	6	VERTICAL
5	5458.00	45.12	54.00	-8.88	7.39	3.52	34.21	0.00 Average	100	229	VERTICAL
6	5458.00	53.65	74.00	-20.35	15.92	3.52	34.21	0.00 Peak	100	229	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0 40MHz Ch 38, 46 / Ant. 3 + Ant. 4
Test Date	Aug. 22, 2012		

#### Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	5145.80	66.09	74.00	-7.91	28.99	3.43	33.67	0.00 Peak	115	4	VERTICAL
2	5150.00	52.97	54.00	-1.03	15.87	3.43	33.67	0.00 Average	115	4	VERTICAL
3	5185.20	97.64				3.44	33.73	0.00 Average	115	4	VERTICAL
4	5185.20	108.43				3.44	33.73	0.00 Peak	115	4	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

#### Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	5145.20	52.47	54.00	-1.53	15.37	3.43	33.67	0.00 Average	101	9	VERTICAL
2	5145.20	62.74	74.00	-11.26	25.64	3.43	33.67	0.00 Peak	101	9	VERTICAL
3	5225.20	98.90				3.46	33.79	0.00 Average	101	9	VERTICAL
4	5225.60	109.48				3.46	33.79	0.00 Peak	101	9	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	21°C	Humidity	56.4%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0 80MHz Ch 42 / Ant. 3 + Ant. 4 + Ant. 5
Test Date	Aug. 22, 2012		

#### Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5145.20	68.93	74.00	-5.07	31.83	3.43	33.67	0.00	Peak	102	17 VERTICAL
2	5150.00	52.41	54.00	-1.59	15.31	3.43	33.67	0.00	Average	102	17 VERTICAL
3	5215.40	92.52				3.45	33.79	0.00	Average	102	17 VERTICAL
4	5216.00	103.99				3.45	33.79	0.00	Peak	102	17 VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or  $\pm 20\text{ppm}$  (IEEE 802.11nspecification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- EUT have transmitted absence of modulation signal and fixed channelize.
- Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
- Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
- $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20\text{ppm}$  (IEEE 802.11nspecification).
- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
- Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

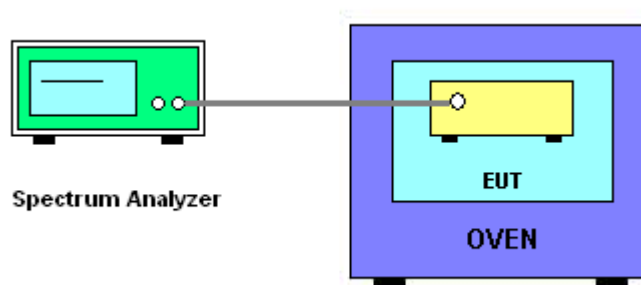



#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5199.9781
110.00	5199.9768
93.50	5199.9770
Max. Deviation (MHz)	0.023200
Max. Deviation (ppm)	4.46

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5199.9802
-20	5199.9776
-10	5199.9768
0	5199.9781
10	5199.9778
20	5199.9770
30	5199.9768
40	5199.9776
50	5199.9802
Max. Deviation (MHz)	0.023200
Max. Deviation (ppm)	4.46

## **4.9. Antenna Requirements**

### **4.9.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **4.9.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 30, 2011	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2011	Radiation (03CH01-CB))
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2011	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	May 20, 2012	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 22, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix