



BUREAU  
VERITAS

Test Report No.: RF2109WDG0341-2



Certificate # 2951.01

# TEST REPORT



Applicant	Belkin International, Inc.
Address	555 S. Aviation Blvd., Suite 180, El Segundo, CA 90245-4852, USA

Manufacturer or Supplier	Belkin International, Inc.
Address	555 S. Aviation Blvd., Suite 180, El Segundo, CA 90245-4852, USA
Product	SOUNDFORM™ Immerse Noise-Canceling Earbuds
Brand Name	belkin
Models	AUC003
Additional Model & Model Difference	N/A
Date of tests	Sep. 24, 2021 ~ Jan. 16, 2022

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Jan. 19, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps.bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS..... 5**

**2 MEASUREMENT UNCERTAINTY ..... 5**

**3 GENERAL INFORMATION ..... 6**

3.1 GENERAL DESCRIPTION OF EUT ..... 6

3.2 DESCRIPTION OF TEST MODES ..... 8

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST ..... 8

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 8

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 10

3.4 DESCRIPTION OF SUPPORT UNITS ..... 10

**4 TEST TYPES AND RESULTS.....11**

4.1 RADIATED EMISSION MEASUREMENT .....11

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....11

4.1.2 TEST INSTRUMENTS..... 12

4.1.3 TEST PROCEDURES ..... 13

4.1.4 DEVIATION FROM TEST STANDARD ..... 14

4.1.5 TEST SETUP ..... 14

4.1.6 EUT OPERATING CONDITIONS ..... 15

4.1.7 TEST RESULTS ..... 16

4.2 6dB BANDWIDTH MEASUREMENT..... 32

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT..... 32

4.2.2 TEST INSTRUMENTS..... 32

4.2.3 TEST PROCEDURE..... 33

4.2.4 DEVIATION FROM TEST STANDARD ..... 33

4.2.5 TEST SETUP ..... 34

4.2.6 EUT OPERATING CONDITIONS ..... 34

4.2.7 TEST RESULTS ..... 35

4.3 CONDUCTED OUTPUT POWER..... 39

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT ..... 39

4.3.2 TEST SETUP ..... 39

4.3.3 TEST INSTRUMENTS..... 39

4.3.4 TEST PROCEDURES ..... 40



4.3.5	DEVIATION FROM TEST STANDARD .....	40
4.3.6	EUT OPERATING CONDITIONS .....	40
4.3.7	TEST RESULTS .....	41
4.3.7.1	MAXIMUM PEAK OUTPUT POWER .....	41
4.3.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE) .....	42
4.4	POWER SPECTRAL DENSITY MEASUREMENT .....	43
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	43
4.4.2	TEST SETUP .....	43
4.4.3	TEST INSTRUMENTS .....	43
4.4.4	TEST PROCEDURE .....	43
4.4.5	DEVIATION FROM TEST STANDARD .....	43
4.4.6	EUT OPERATING CONDITION .....	43
4.4.7	TEST RESULTS .....	44
4.5	OUT OF BAND EMISSION MEASUREMENT .....	52
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	52
4.5.2	TEST SETUP .....	52
4.5.3	TEST INSTRUMENTS .....	52
4.5.4	TEST PROCEDURE .....	52
4.5.5	DEVIATION FROM TEST STANDARD .....	53
4.5.6	EUT OPERATING CONDITION .....	53
4.5.7	TEST RESULTS .....	54
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>58</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>59</b>



**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2109WDG0341-2	Original release	Jan. 19, 2022



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by battery
15.205 15.209	Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

# 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.63dB
	1GHz ~ 18GHz	4.96dB
	18GHz ~ 40GHz	4.37dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	SOUNDFORM™ Immerse Noise-Canceling Earbuds
<b>MODEL NO.</b>	AUC003
<b>ADDITIONAL MODEL</b>	N/A
<b>FCC ID</b>	K7SSAP124
<b>NOMINAL VOLTAGE</b>	Earbuds: DC 3.7V from battery Earbuds charging: DC 5V from charging case Charging case: DC 3.7V from battery Charging case charging: DC 5V 1000mA from USB host unit or 2.5W from wireless charging
<b>MODULATION TECHNOLOGY</b>	DTS
<b>MODULATION TYPE</b>	BT-LE GFSK (1& 2Mbps)
<b>OPERATING FREQUENCY</b>	2402-2480MHz
<b>PEAK OUTPUT POWER</b>	<b>Left Earbud:</b> 11.885mW (Measured Max.) <b>Right Earbud:</b> 11.272mW (Measured Max.)
<b>ANTENNA TYPE</b>	<b>Left Earbud:</b> FPCB Antenna, -1.06dBi Gain <b>Right Earbud:</b> FPCB Antenna, -1.01dBi Gain
<b>I/O PORTS</b>	Refer to user’s manual
<b>CABLE SUPPLIED</b>	USB-A to USB-C Cable:0.35m, Unshielded, 0 Core

**NOTES:**

1. For a more detailed features description, please refer to the manufacturer’s specifications or the user’s manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2109WDG0341-1) for detailed product photo.
4. When the EUT charging that BT function can’t working, the charging mode was tested in the FCC Part 15B(sDOC) report.(report no.: FS2109WDG0341)
5. This product has two Bluetooth Chips (distribute left earbud and right earbud), they are identical in RF circuitry except the antenna gain and Layout of partial components, all test items are carried out on the maximum power “Left earbud” except Conducted Output power, Power Spectral Density and Radiated Emission tests.



6. This product (earbuds and charging case) has support Bluetooth function respectively, such as listed below:

Product		RF Function
AUC003	Earbuds	1, BT2.1+EDR <b>2, BT-LE GFSK(1 &amp; 2Mbps)</b>
	Charging Case	1, BT-LE GFSK(1 & 2Mbps) 2, Wireless charging(receiving only)

The corresponding RF functions in this report are marked in bold.



### 3.2 DESCRIPTION OF TEST MODES

40 channels are provided for BT-LE (1, 2 Mbps):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	<b>19</b>	<b>2440</b>	29	2460	<b>39</b>	<b>2480</b>

#### 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

#### 3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	Powered by Fully Battery with Bluetooth link

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** No need to concern of Conducted Emission due to the EUT is powered by battery.





**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	GFSK	1
BT-LE	0 to 39	39	DTS	GFSK	2

For the test results, only the worst case was shown in test report.

**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	GFSK	1
BT-LE	0 to 39	39	DTS	GFSK	2

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	GFSK	1
BT-LE	0 to 39	39	DTS	GFSK	2



**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	28deg. C, 56%RH	DC 3.7V From Fully Battery	Jelly
RE≥1G	28deg. C, 56%RH	DC 3.7V From Fully Battery	Jelly
PLC	N/A	N/A	N/A
APCM	25deg. C, 58%RH	DC 3.7V From Fully Battery	Ryker

**3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**KDB558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

Note: All test items have been performed and recorded as per the above standards.

**3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together without any other necessary accessories or support units.



## 4 TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 07, 22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 09, 22
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 20, 22
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 13, 22
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	May 21, 22
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 21, 22
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 14, 22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22, 22
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 12, 22
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 10, 23
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

**NOTES:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the center of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTES:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




#### 4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.1.5 TEST SETUP

##### Below 30MHz test setup

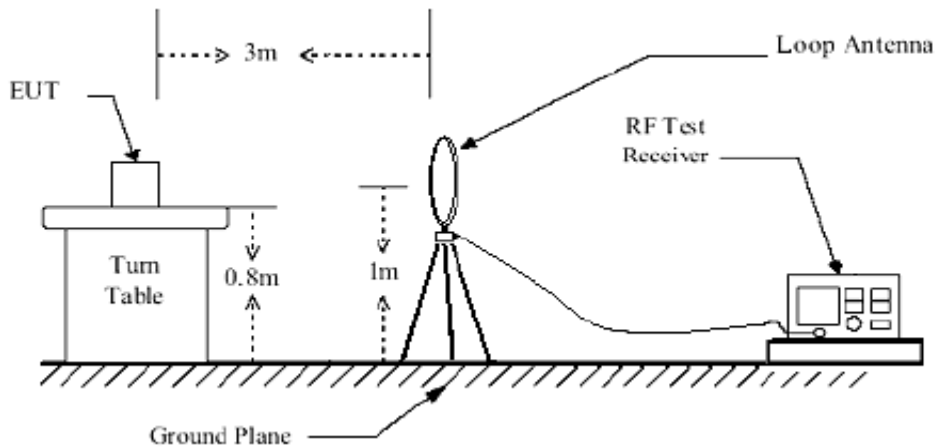


##### Below 1GHz test setup

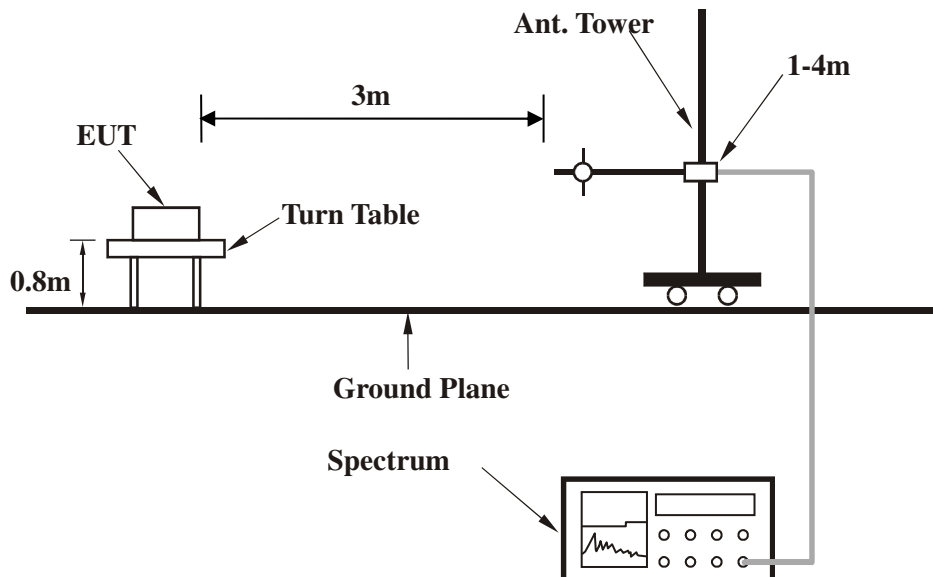

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



## Above 1GHz test setup

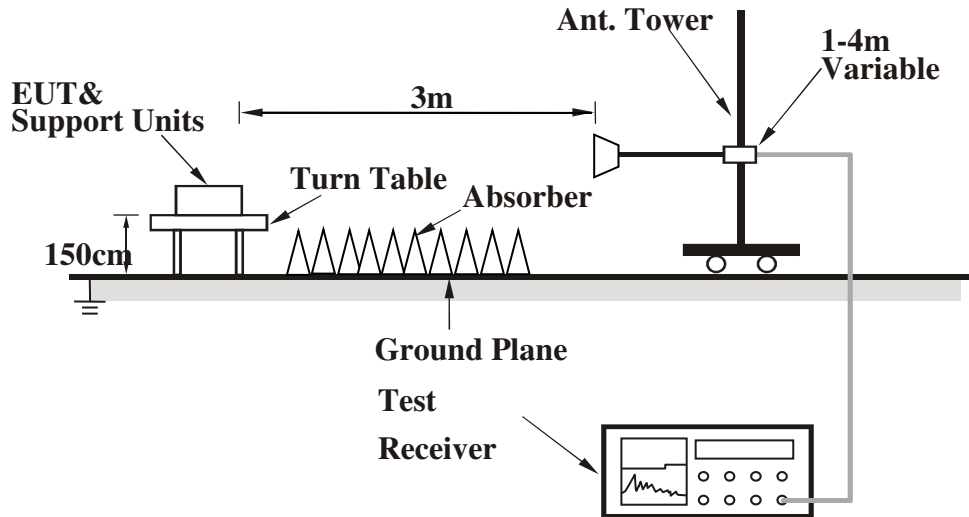

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 4.1.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

Left Earbud:


BT-LE (GFSK) (1Mbps)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	18.56 QP	40.00	-21.44	1.28 H	42	31.42	-12.86
2	297.37	14.45 QP	46.00	-31.55	1.03 H	52	30.55	-16.10
3	448.16	18.17 QP	46.00	-27.83	1.48 H	245	30.33	-12.16
4	555.42	21.49 QP	46.00	-24.51	2.00 H	342	29.54	-8.05
5	682.88	22.40 QP	46.00	-23.60	3.68 H	175	29.99	-7.59
6	948.70	31.13 QP	46.00	-14.87	3.79 H	24	33.97	-2.84

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

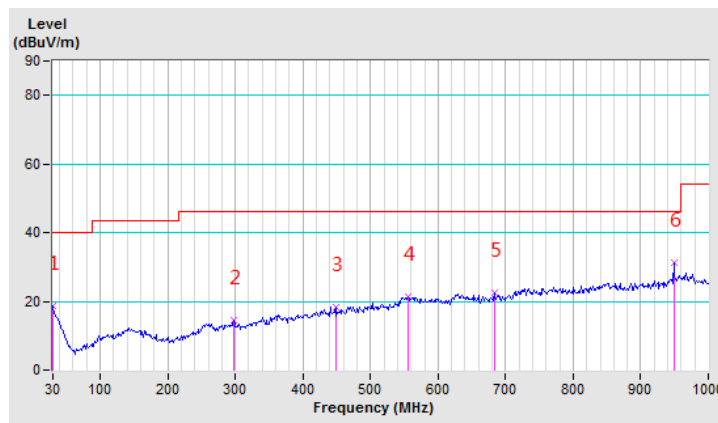






<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	157.47	12.21 QP	43.50	-31.29	1.02 V	48	30.74	-18.53
2	361.11	13.66 QP	46.00	-32.34	1.01 V	93	27.54	-13.88
3	552.31	20.20 QP	46.00	-25.80	1.07 V	104	28.26	-8.06
4	639.36	21.28 QP	46.00	-24.72	1.08 V	151	28.69	-7.41
5	731.07	22.29 QP	46.00	-23.71	1.08 V	115	28.02	-5.73
6	877.20	24.90 QP	46.00	-21.10	1.00 V	133	29.68	-4.78

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

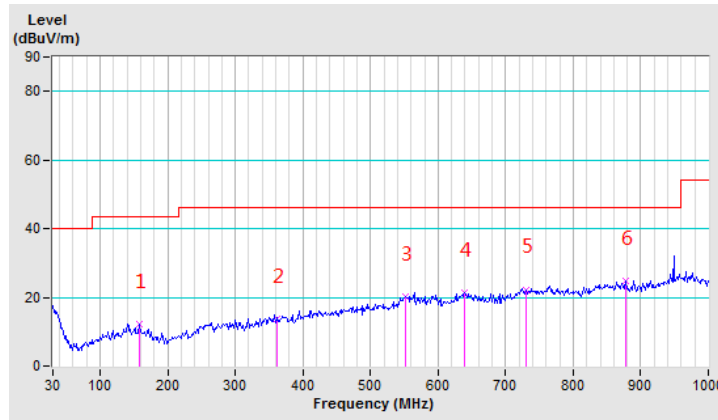



**Right Earbud:**


**BT-LE (GFSK) (1Mbps)**

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	263.17	13.88 QP	46.00	-32.12	1.05 H	134	30.17	-16.29
2	368.88	13.63 QP	46.00	-32.37	1.24 H	223	27.55	-13.92
3	564.74	20.39 QP	46.00	-25.61	1.21 H	145	28.59	-8.20
4	681.33	21.86 QP	46.00	-24.14	1.31 H	110	29.43	-7.57
5	734.18	23.31 QP	46.00	-22.69	2.25 H	98	29.04	-5.73
6	833.67	24.20 QP	46.00	-21.80	2.79 H	164	28.90	-4.70

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

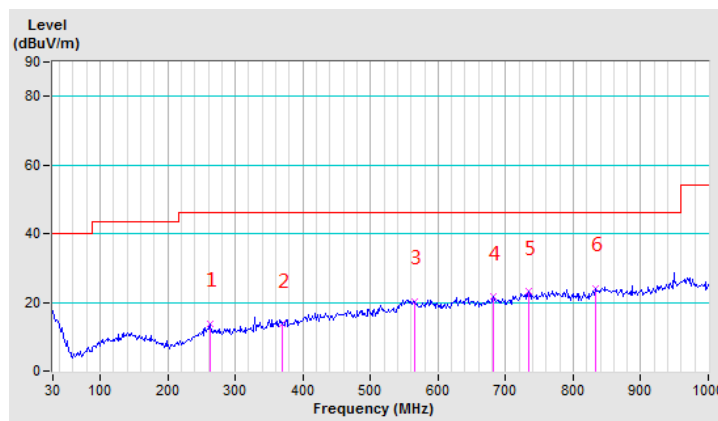




<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	135.71	11.19 QP	43.50	-32.31	1.01 V	254	29.58	-18.39
2	337.79	12.75 QP	46.00	-33.25	1.04 V	252	27.87	-15.12
3	466.81	17.36 QP	46.00	-28.64	1.06 V	352	28.78	-11.42
4	630.03	20.41 QP	46.00	-25.59	1.02 V	147	27.83	-7.42
5	729.52	22.73 QP	46.00	-23.27	1.01 V	185	28.49	-5.76
6	948.70	34.56 QP	46.00	-11.44	1.02 V	56	37.40	-2.84

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

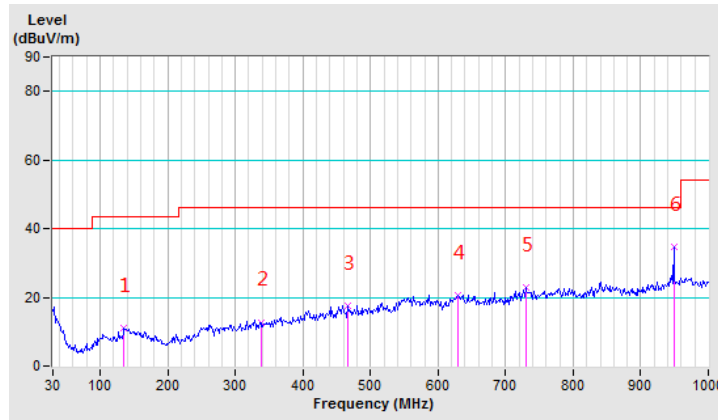



ABOVE 1GHz TEST DATA:

Left Earbud:

BT-LE (GFSK) (1Mbps)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.18 PK	74.00	-30.82	1.50 H	144	41.21	1.97
2	2390.00	38.59 AV	54.00	-15.41	1.50 H	144	36.62	1.97
3	*2402.00	102.74 PK			1.50 H	144	100.76	1.98
4	*2402.00	101.55 AV			1.50 H	144	99.57	1.98
5	4804.00	52.88 PK	74.00	-21.12	1.50 H	0	47.99	4.89
6	4804.00	43.00 AV	54.00	-11.00	1.50 H	0	38.11	4.89
7	#7206.00	56.23 PK	74.00	-17.77	1.50 H	0	46.67	9.56
8	#7206.00	45.55 AV	54.00	-8.45	1.50 H	0	35.99	9.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.25 PK	74.00	-30.75	1.50 V	144	41.28	1.97
2	2390.00	38.10 AV	54.00	-15.90	1.50 V	144	36.13	1.97
3	*2402.00	96.95 PK			1.50 V	144	94.97	1.98
4	*2402.00	96.00 AV			1.50 V	144	94.02	1.98
5	4804.00	53.21 PK	74.00	-20.79	1.50 V	0	48.32	4.89
6	4804.00	42.36 AV	54.00	-11.64	1.50 V	0	37.47	4.89
7	#7206.00	57.11 PK	74.00	-16.89	1.50 V	0	47.55	9.56
8	#7206.00	45.26 AV	54.00	-8.74	1.50 V	0	35.70	9.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	102.84 PK			1.50 H	145	100.84	2.00
2	*2440.00	101.35 AV			1.50 H	145	99.35	2.00
3	4880.00	54.21 PK	74.00	-19.79	1.50 H	0	49.03	5.18
4	4880.00	42.36 AV	54.00	-11.64	1.50 H	0	37.18	5.18
5	7320.00	57.15 PK	74.00	-16.85	1.50 H	0	47.12	10.03
6	7320.00	45.69 AV	54.00	-8.31	1.50 H	0	35.66	10.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	96.35 PK			1.50 V	145	94.35	2.00
2	*2440.00	95.86 AV			1.50 V	145	93.86	2.00
3	4880.00	54.33 PK	74.00	-19.67	1.50 V	0	49.15	5.18
4	4880.00	42.87 AV	54.00	-11.13	1.50 V	0	37.69	5.18
5	7320.00	57.15 PK	74.00	-16.85	1.50 V	0	47.12	10.03
6	7320.00	45.11 AV	54.00	-8.89	1.50 V	0	35.08	10.03

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	*2480.00	102.95 PK			1.50 H	123	100.93	2.02
2	*2480.00	101.89 AV			1.50 H	123	99.87	2.02
3	2483.50	56.33 PK	74.00	-17.67	1.50 H	123	54.30	2.03
4	2483.50	45.36 AV	54.00	-8.64	1.50 H	123	43.33	2.03
5	4960.00	53.88 PK	74.00	-20.12	1.50 H	0	48.39	5.49
6	4960.00	42.31 AV	54.00	-11.69	1.50 H	0	36.82	5.49
7	7440.00	56.25 PK	74.00	-17.75	1.50 H	0	45.74	10.51
8	7440.00	45.71 AV	54.00	-8.29	1.50 H	0	35.20	10.51
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	*2480.00	97.00 PK			1.50 V	122	94.98	2.02
2	*2480.00	96.25 AV			1.50 V	122	94.23	2.02
3	2483.50	55.45 PK	74.00	-18.55	1.50 V	122	53.42	2.03
4	2483.50	45.22 AV	54.00	-8.78	1.50 V	122	43.19	2.03
5	4960.00	52.33 PK	74.00	-21.67	1.50 V	0	46.84	5.49
6	4960.00	42.61 AV	54.00	-11.39	1.50 V	0	37.12	5.49
7	7440.00	57.82 PK	74.00	-16.18	1.50 V	0	47.31	10.51
8	7440.00	46.00 AV	54.00	-8.00	1.50 V	0	35.49	10.51

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



**BT-LE (GFSK) (2Mbps)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.35 PK	74.00	-24.65	1.07 H	45	47.38	1.97
2	2390.00	37.24 AV	54.00	-16.76	1.07 H	45	35.27	1.97
3	*2402.00	98.16 PK			1.07 H	45	96.18	1.98
4	*2402.00	94.87 AV			1.07 H	45	92.89	1.98
5	4804.00	53.81 PK	74.00	-20.19	1.27 H	319	48.92	4.89
6	4804.00	43.52 AV	54.00	-10.48	1.27 H	319	38.63	4.89
7	#7206.00	55.27 PK	74.00	-18.73	1.00 H	215	45.71	9.56
8	#7206.00	45.34 AV	54.00	-8.66	1.00 H	215	35.78	9.56

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.27 PK	74.00	-26.73	1.33 V	65	45.30	1.97
2	2390.00	36.59 AV	54.00	-17.41	1.33 V	65	34.62	1.97
3	*2402.00	96.94 PK			1.33 V	65	94.96	1.98
4	*2402.00	94.03 AV			1.33 V	65	92.05	1.98
5	4804.00	52.77 PK	74.00	-21.23	1.52 V	46	47.88	4.89
6	4804.00	41.29 AV	54.00	-12.71	1.52 V	46	36.40	4.89
7	#7206.00	53.09 PK	74.00	-20.91	1.00 V	207	43.53	9.56
8	#7206.00	44.16 AV	54.00	-9.84	1.00 V	207	34.60	9.56

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	99.87 PK			1.00 H	215	97.87	2.00
2	*2440.00	96.25 AV			1.00 H	215	94.25	2.00
3	4880.00	53.82 PK	74.00	-20.18	1.32 H	217	48.64	5.18
4	4880.00	43.17 AV	54.00	-10.83	1.32 H	217	37.99	5.18
5	7320.00	55.39 PK	74.00	-18.61	1.00 H	266	45.36	10.03
6	7320.00	45.22 AV	54.00	-8.78	1.00 H	266	35.19	10.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	97.15 PK			1.05 V	142	95.15	2.00
2	*2440.00	94.08 AV			1.05 V	142	92.08	2.00
3	4880.00	52.26 PK	74.00	-21.74	1.28 V	325	47.08	5.18
4	4880.00	42.71 AV	54.00	-11.29	1.28 V	325	37.53	5.18
5	7320.00	53.96 PK	74.00	-20.04	1.00 V	234	43.93	10.03
6	7320.00	44.37 AV	54.00	-9.63	1.00 V	234	34.34	10.03

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.





<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.59 PK			1.33 H	286	98.57	2.02
2	*2480.00	97.14 AV			1.33 H	286	95.12	2.02
3	2483.50	51.33 PK	74.00	-22.67	1.33 H	286	49.30	2.03
4	2483.50	39.29 AV	54.00	-14.71	1.33 H	286	37.26	2.03
5	4960.00	54.71 PK	74.00	-19.29	1.05 H	217	49.22	5.49
6	4960.00	44.29 AV	54.00	-9.71	1.05 H	217	38.80	5.49
7	7440.00	56.81 PK	74.00	-17.19	1.00 H	24	46.30	10.51
8	7440.00	46.74 AV	54.00	-7.26	1.00 H	24	36.23	10.51
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.24 PK			1.37 V	203	96.22	2.02
2	*2480.00	95.39 AV			1.37 V	203	93.37	2.02
3	2483.50	50.27 PK	74.00	-23.73	1.37 V	203	48.24	2.03
4	2483.50	37.82 AV	54.00	-16.18	1.37 V	203	35.79	2.03
5	4960.00	53.05 PK	74.00	-20.95	1.54 V	308	47.56	5.49
6	4960.00	43.14 AV	54.00	-10.86	1.54 V	308	37.65	5.49
7	7440.00	55.21 PK	74.00	-18.79	1.00 V	87	44.70	10.51
8	7440.00	45.39 AV	54.00	-8.61	1.00 V	87	34.88	10.51

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



Right Earbud:

BT-LE (GFSK) (1Mbps)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.00 PK	74.00	-29.00	1.50 H	125	43.03	1.97
2	2390.00	38.95 AV	54.00	-15.05	1.50 H	125	36.98	1.97
3	*2402.00	99.49 PK			1.50 H	125	97.51	1.98
4	*2402.00	98.56 AV			1.50 H	125	96.58	1.98
5	4804.00	53.25 PK	74.00	-20.75	1.50 H	0	48.36	4.89
6	4804.00	42.21 AV	54.00	-11.79	1.50 H	0	37.32	4.89
7	#7206.00	57.04 PK	74.00	-16.96	1.50 H	0	47.48	9.56
8	#7206.00	45.39 AV	54.00	-8.61	1.50 H	0	35.83	9.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.32 PK	74.00	-27.68	1.50 V	125	44.35	1.97
2	2390.00	38.54 AV	54.00	-15.46	1.50 V	125	36.57	1.97
3	*2402.00	94.17 PK			1.50 V	125	92.19	1.98
4	*2402.00	93.22 AV			1.50 V	125	91.24	1.98
5	4804.00	53.64 PK	74.00	-20.36	1.50 V	0	48.75	4.89
6	4804.00	42.35 AV	54.00	-11.65	1.50 V	0	37.46	4.89
7	#7206.00	56.00 PK	74.00	-18.00	1.50 V	0	46.44	9.56
8	#7206.00	45.26 AV	54.00	-8.74	1.50 V	0	35.70	9.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	99.82 PK			1.50 H	155	97.82	2.00
2	*2440.00	98.71 AV			1.50 H	155	96.71	2.00
3	4880.00	53.21 PK	74.00	-20.79	1.50 H	0	48.03	5.18
4	4880.00	42.36 AV	54.00	-11.64	1.50 H	0	37.18	5.18
5	7320.00	55.00 PK	74.00	-19.00	1.50 H	0	44.97	10.03
6	7320.00	45.82 AV	54.00	-8.18	1.50 H	0	35.79	10.03
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	94.11 PK			1.50 V	155	92.11	2.00
2	*2440.00	93.15 AV			1.50 V	155	91.15	2.00
3	4880.00	53.55 PK	74.00	-20.45	1.50 V	0	48.37	5.18
4	4880.00	41.00 AV	54.00	-13.00	1.50 V	0	35.82	5.18
5	7320.00	55.45 PK	74.00	-18.55	1.50 V	0	45.42	10.03
6	7320.00	45.11 AV	54.00	-8.89	1.50 V	0	35.08	10.03

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.52 PK			1.50 H	125	97.50	2.02
2	*2480.00	98.54 AV			1.50 H	125	96.52	2.02
3	2483.50	54.36 PK	74.00	-19.64	1.50 H	125	52.33	2.03
4	2483.50	45.32 AV	54.00	-8.68	1.50 H	125	43.29	2.03
5	4960.00	54.36 PK	74.00	-19.64	1.50 H	0	48.87	5.49
6	4960.00	42.12 AV	54.00	-11.88	1.50 H	0	36.63	5.49
7	7440.00	56.24 PK	74.00	-17.76	1.50 H	0	45.73	10.51
8	7440.00	45.36 AV	54.00	-8.64	1.50 H	0	34.85	10.51

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.26 PK			1.50 V	125	92.24	2.02
2	*2480.00	93.55 AV			1.50 V	125	91.53	2.02
3	2483.50	54.36 PK	74.00	-19.64	1.50 V	125	52.33	2.03
4	2483.50	45.36 AV	54.00	-8.64	1.50 V	125	43.33	2.03
5	4960.00	52.33 PK	74.00	-21.67	1.50 V	0	46.84	5.49
6	4960.00	42.36 AV	54.00	-11.64	1.50 V	0	36.87	5.49
7	7440.00	55.67 PK	74.00	-18.33	1.50 V	0	45.16	10.51
8	7440.00	45.36 AV	54.00	-8.64	1.50 V	0	34.85	10.51

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



**BT-LE (GFSK) (2Mbps)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	2390.00	50.36 PK	74.00	-23.64	1.36 H	276	48.39	1.97
2	2390.00	38.14 AV	54.00	-15.86	1.36 H	276	36.17	1.97
3	*2402.00	99.21 PK			1.36 H	276	97.23	1.98
4	*2402.00	95.34 AV			1.36 H	276	93.36	1.98
5	4804.00	54.76 PK	74.00	-19.24	1.25 H	305	49.87	4.89
6	4804.00	42.86 AV	54.00	-11.14	1.25 H	305	37.97	4.89
7	#7206.00	56.39 PK	74.00	-17.61	1.00 H	77	46.83	9.56
8	#7206.00	46.02 AV	54.00	-7.98	1.00 H	77	36.46	9.56

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	2390.00	49.28 PK	74.00	-24.72	1.00 V	46	47.31	1.97
2	2390.00	37.22 AV	54.00	-16.78	1.00 V	46	35.25	1.97
3	*2402.00	97.22 PK			1.00 V	46	95.24	1.98
4	*2402.00	93.19 AV			1.00 V	46	91.21	1.98
5	4804.00	53.25 PK	74.00	-20.75	1.46 V	203	48.36	4.89
6	4804.00	41.74 AV	54.00	-12.26	1.46 V	203	36.85	4.89
7	#7206.00	55.19 PK	74.00	-18.81	1.00 V	335	45.63	9.56
8	#7206.00	45.21 AV	54.00	-8.79	1.00 V	335	35.65	9.56

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE : HORIZONTAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	*2440.00	100.05 PK			1.31 H	272	98.05	2.00
2	*2440.00	97.87 AV			1.31 H	272	95.87	2.00
3	4880.00	54.32 PK	74.00	-19.68	1.06 H	97	49.14	5.18
4	4880.00	43.66 AV	54.00	-10.34	1.06 H	97	38.48	5.18
5	7320.00	55.79 PK	74.00	-18.21	1.00 H	24	45.76	10.03
6	7320.00	46.34 AV	54.00	-7.66	1.00 H	24	36.31	10.03
<b>ANTENNA POLARITY &amp; TEST DISTANCE : VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	*2440.00	98.22 PK			1.00 V	317	96.22	2.00
2	*2440.00	96.14 AV			1.00 V	317	94.14	2.00
3	4880.00	53.21 PK	74.00	-20.79	1.25 V	55	48.03	5.18
4	4880.00	42.05 AV	54.00	-11.95	1.25 V	55	36.87	5.18
5	7320.00	54.26 PK	74.00	-19.74	1.00 V	300	44.23	10.03
6	7320.00	45.44 AV	54.00	-8.56	1.00 V	300	35.41	10.03

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.35 PK			1.32 H	26	98.33	2.02
2	*2480.00	98.06 AV			1.32 H	26	96.04	2.02
3	2483.50	52.19 PK	74.00	-21.81	1.32 H	26	50.16	2.03
4	2483.50	40.36 AV	54.00	-13.64	1.32 H	26	38.33	2.03
5	4960.00	55.43 PK	74.00	-18.57	1.20 H	233	49.94	5.49
6	4960.00	44.71 AV	54.00	-9.29	1.20 H	233	39.22	5.49
7	7440.00	57.25 PK	74.00	-16.75	1.00 H	354	46.74	10.51
8	7440.00	47.36 AV	54.00	-6.64	1.00 H	354	36.85	10.51

**ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.09 PK			1.21 V	304	96.07	2.02
2	*2480.00	95.36 AV			1.21 V	304	93.34	2.02
3	2483.50	51.38 PK	74.00	-22.62	1.21 V	304	49.35	2.03
4	2483.50	39.22 AV	54.00	-14.78	1.21 V	304	37.19	2.03
5	4960.00	54.15 PK	74.00	-19.85	1.00 V	24	48.66	5.49
6	4960.00	43.27 AV	54.00	-10.73	1.00 V	24	37.78	5.49
7	7440.00	56.30 PK	74.00	-17.70	1.00 V	71	45.79	10.51
8	7440.00	46.02 AV	54.00	-7.98	1.00 V	71	35.51	10.51

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



## 4.2 6dB BANDWIDTH MEASUREMENT

### 4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	N/A
Power Sensor	Keysight	U2021XA	MY55060018	May 09, 22
Power Meter	Anritsu	ML2495A	1139001	Feb. 24, 22
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24, 22
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03, 22
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 11, 22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Feb. 24, 22
Signal Generator	Agilent	N5183A	MY50140980	Mar 23, 22
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 14, 22
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

#### NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.





#### 4.2.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.2.5 TEST SETUP

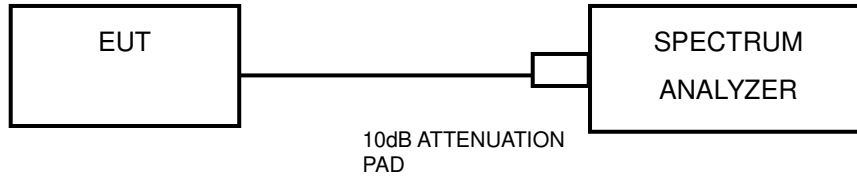

#### 4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




### 4.2.7 TEST RESULTS

#### BT-LE (GFSK) (1Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.72	0.5	PASS
19	2440	0.71	0.5	PASS
39	2480	0.71	0.5	PASS

#### CH 0

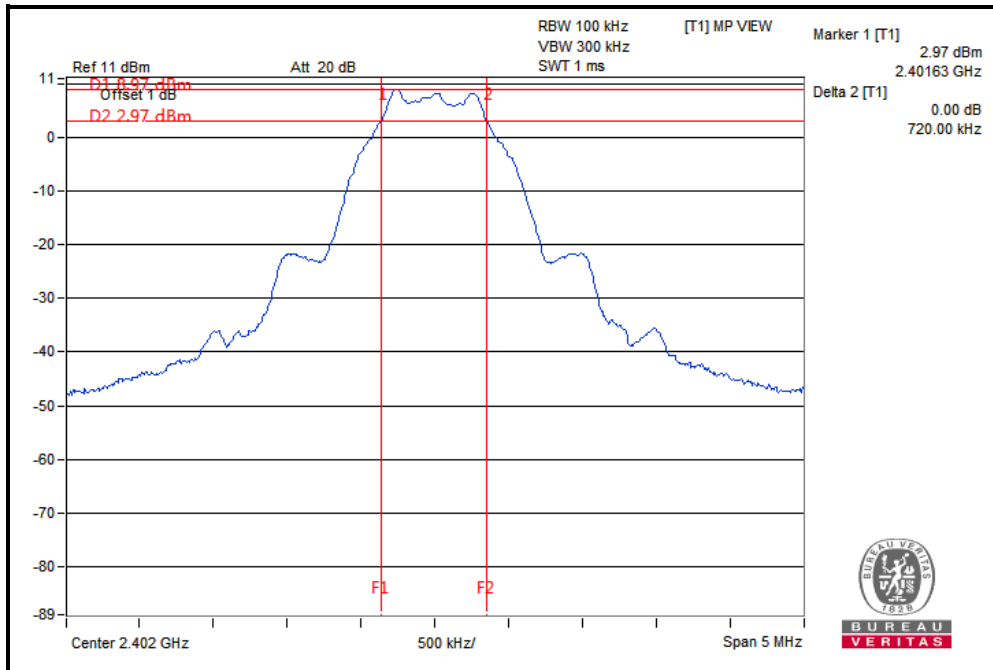





BUREAU VERITAS

Test Report No.: RF2109WDG0341-2

CH 19

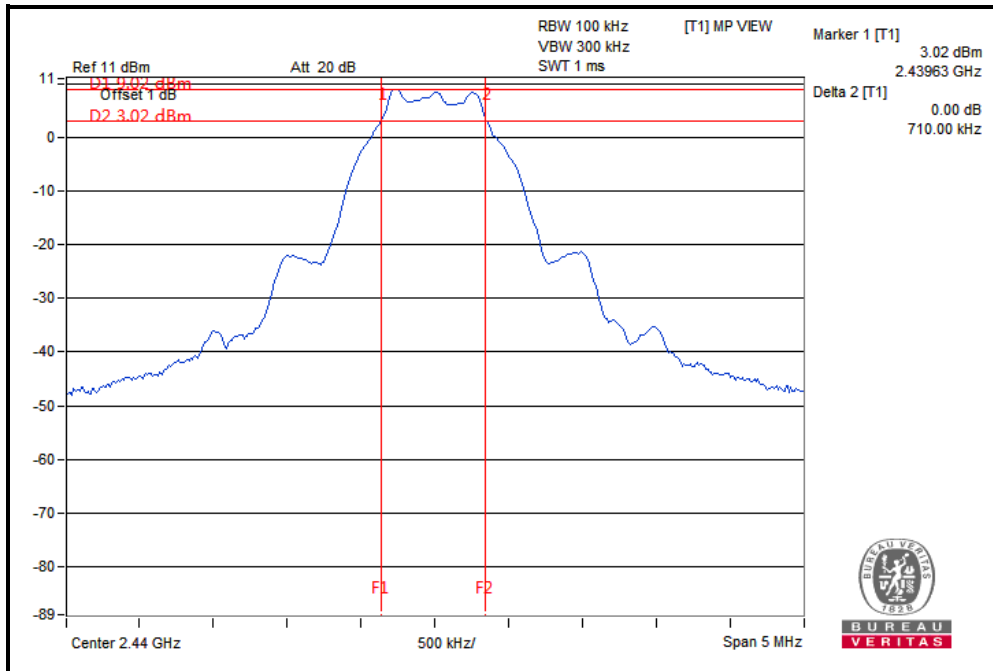

CH 39

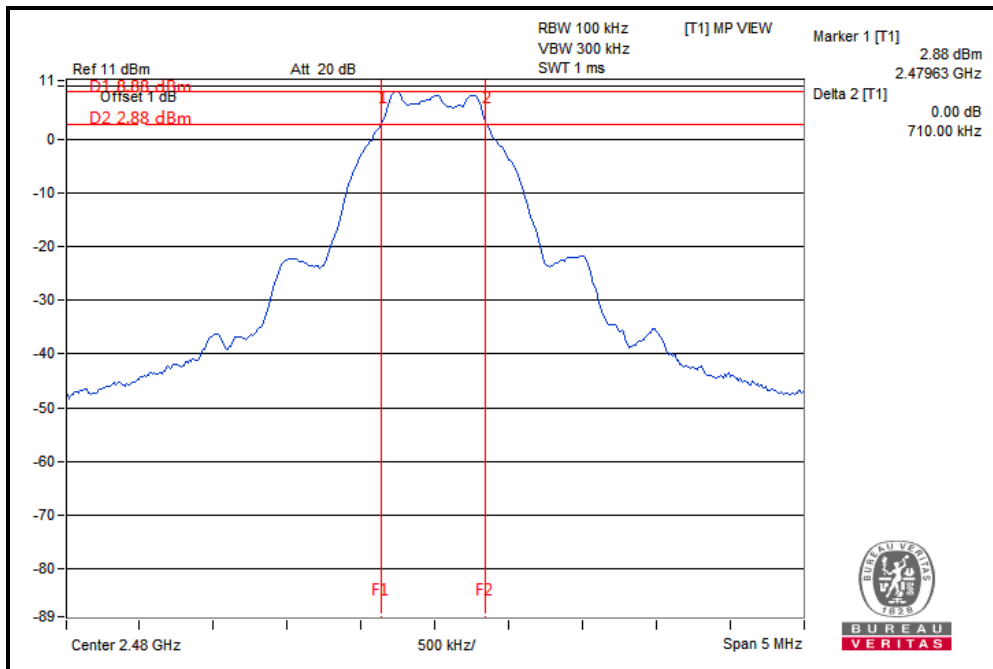

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

**BT-LE (GFSK) (2Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.26	0.5	PASS
19	2440	1.27	0.5	PASS
39	2480	1.28	0.5	PASS

**CH 0**

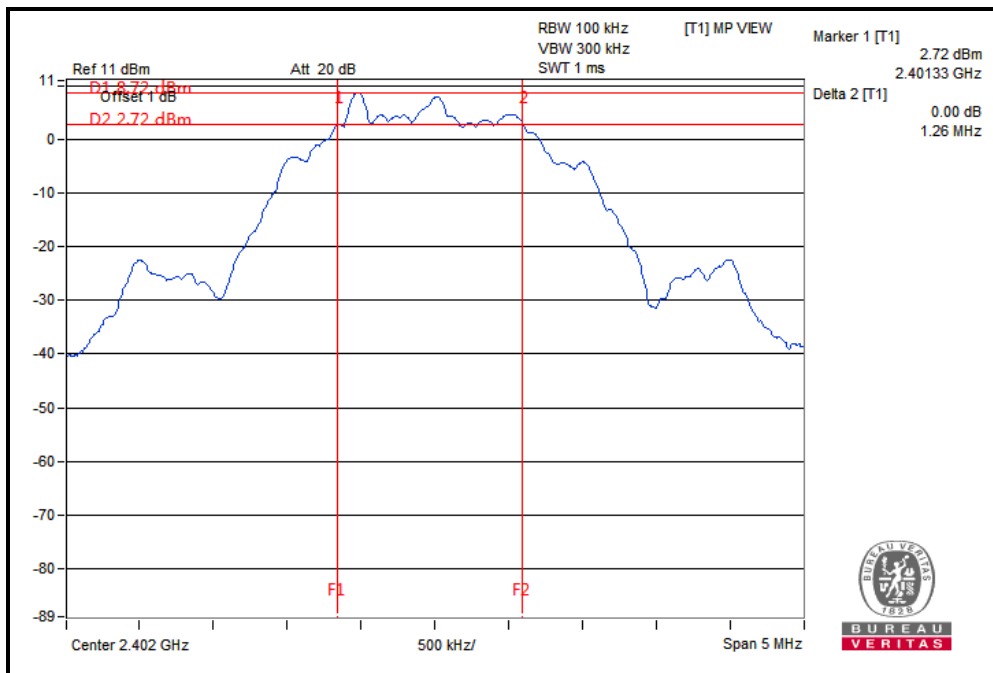

**Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.


Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF2109WDG0341-2

CH 19

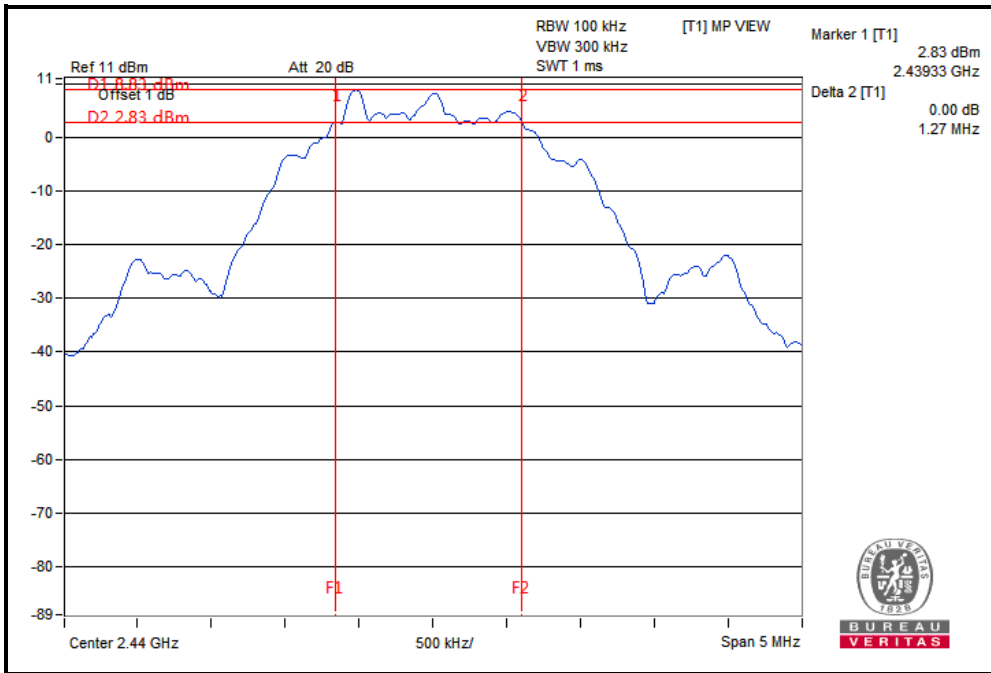

CH 39

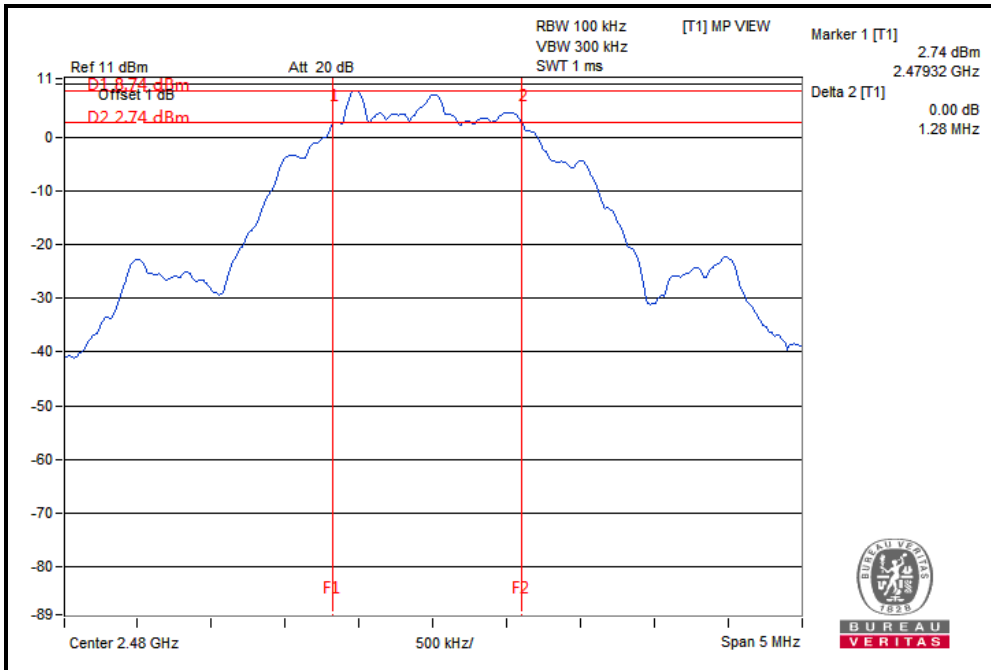

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




### 4.3 CONDUCTED OUTPUT POWER

#### 4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

#### 4.3.2 TEST SETUP

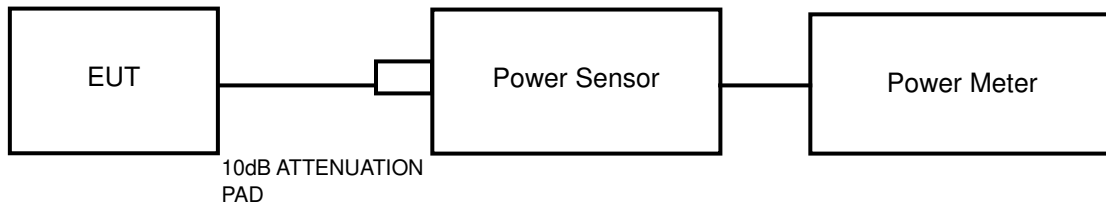

#### 4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	N/A
Power Sensor	Keysight	U2021XA	MY55060018	May 09, 22
Power Meter	Anritsu	ML2495A	1139001	Feb. 24, 22
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24, 22
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03, 22
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 11, 22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Feb. 24, 22
Signal Generator	Agilent	N5183A	MY50140980	Mar 23, 22
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 14, 22
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

- NOTES:** 1. The test was performed in RF Oven room.  
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.3.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.





### 4.3.7 TEST RESULTS

#### 4.3.7.1 MAXIMUM PEAK OUTPUT POWER

**Left Earbud:**

**BT-LE (GFSK) (1Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	10.73	11.830	1	PASS
19	2440	<b>10.75</b>	<b>11.885</b>	1	PASS
39	2480	10.67	11.668	1	PASS

**BT-LE (GFSK) (2Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	6.62	4.592	1	PASS
19	2440	6.58	4.550	1	PASS
39	2480	6.46	4.426	1	PASS

**Right Earbud:**

**BT-LE (GFSK) (1Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	<b>10.52</b>	<b>11.272</b>	1	PASS
19	2440	10.34	10.814	1	PASS
39	2480	10.22	10.520	1	PASS

**BT-LE (GFSK) (2Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	5.39	3.459	1	PASS
19	2440	5.14	3.266	1	PASS
39	2480	5.01	3.170	1	PASS



**4.3.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**Left Earbud:**

**BT-LE (GFSK) (1Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	9.04
19	2440	9.06
39	2480	8.98

**BT-LE (GFSK) (2Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	4.19
19	2440	4.13
39	2480	4.03

**Right Earbud:**

**BT-LE (GFSK) (1Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	8.84
19	2440	8.65
39	2480	8.53

**BT-LE (GFSK) (2Mbps)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	2.98
19	2440	2.67
39	2480	2.57




## 4.4 POWER SPECTRAL DENSITY MEASUREMENT

### 4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

### 4.4.2 TEST SETUP

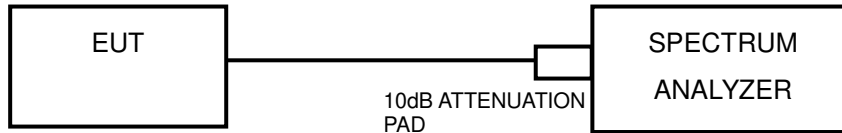

### 4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.4.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW  $\geq 3 \times$  RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




### 4.4.7 TEST RESULTS

**Left Earbud:**

**BT-LE (GFSK) (1Mbps)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-6.49	8	PASS
19	2440	-6.47	8	PASS
39	2480	-6.62	8	PASS

**CH 0**

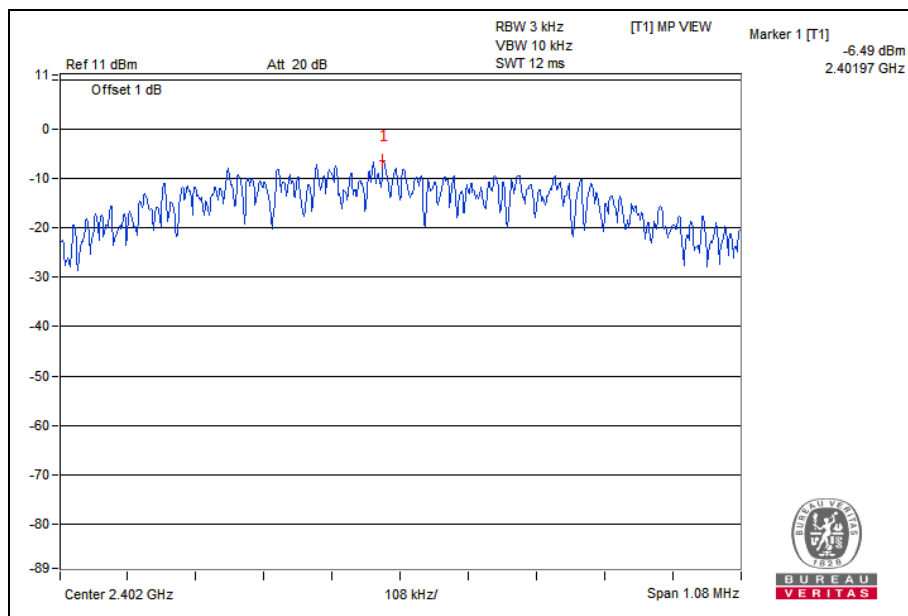





**BUREAU  
VERITAS**

**Test Report No.: RF2109WDG0341-2**

**CH 19**

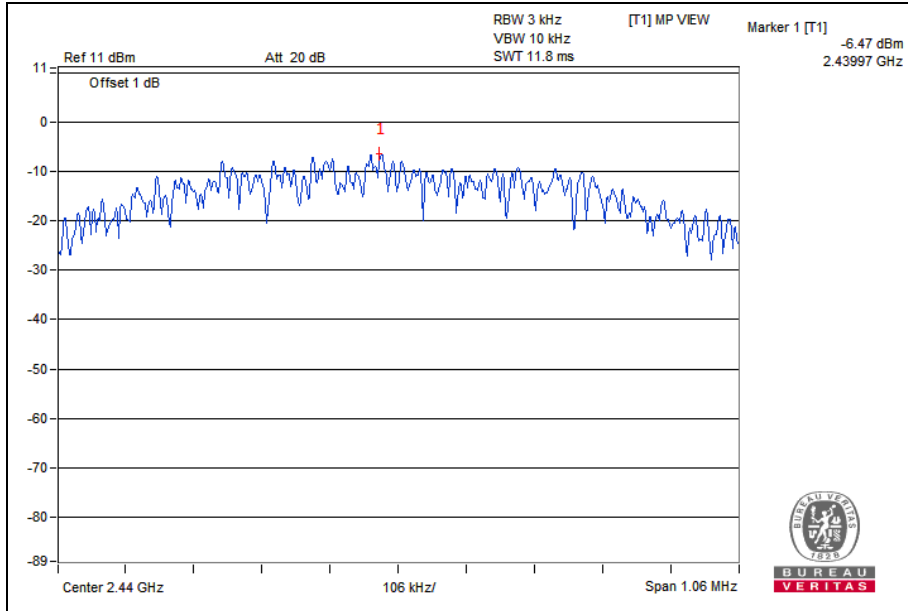

**CH 39**

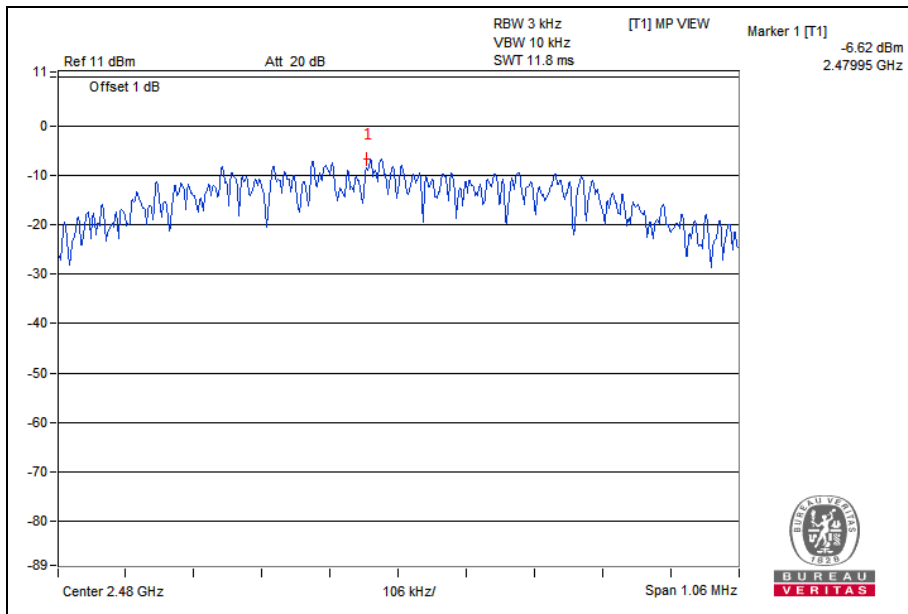

**Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

**BT-LE (GFSK) (2Mbps)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-11.38	8	PASS
19	2440	-11.22	8	PASS
39	2480	-11.56	8	PASS

**CH 0**

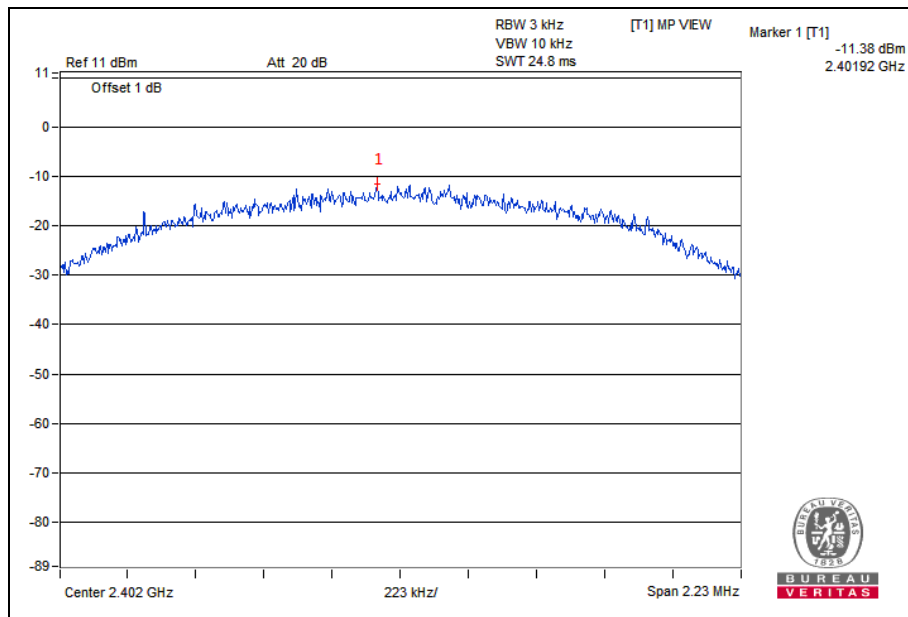





**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

CH 19

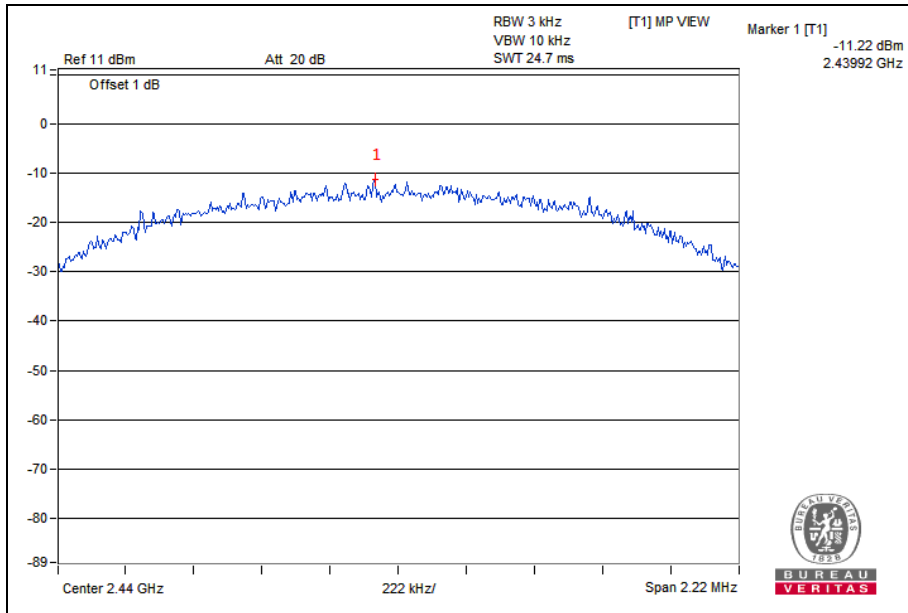

CH 39

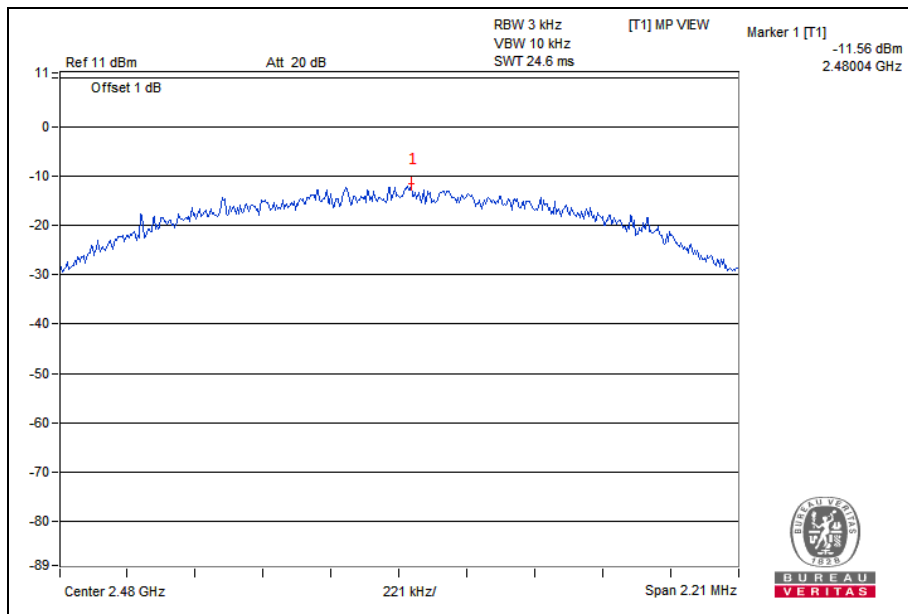

**Bureau Veritas Shenzhen Co., Ltd.**  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

**Right Earbud:  
BT-LE (GFSK) (1Mbps)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-7.62	8	PASS
19	2440	-7.03	8	PASS
39	2480	-7.12	8	PASS

**CH 0**

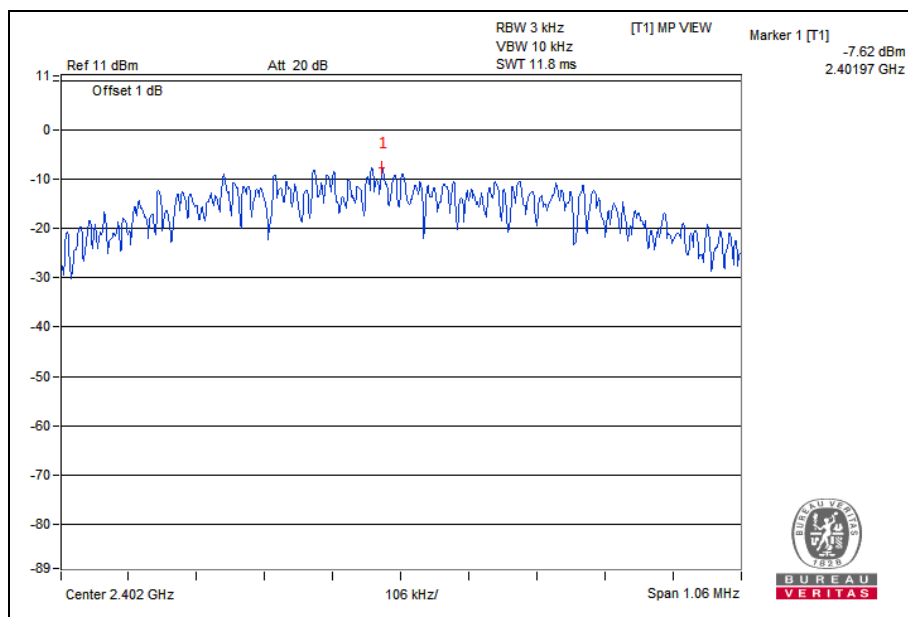







**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

CH 19

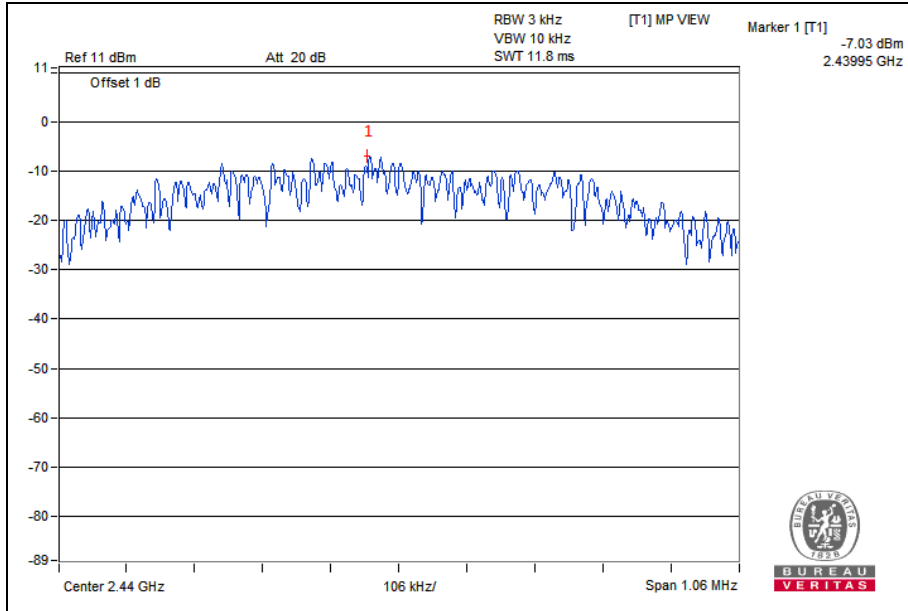

CH 39

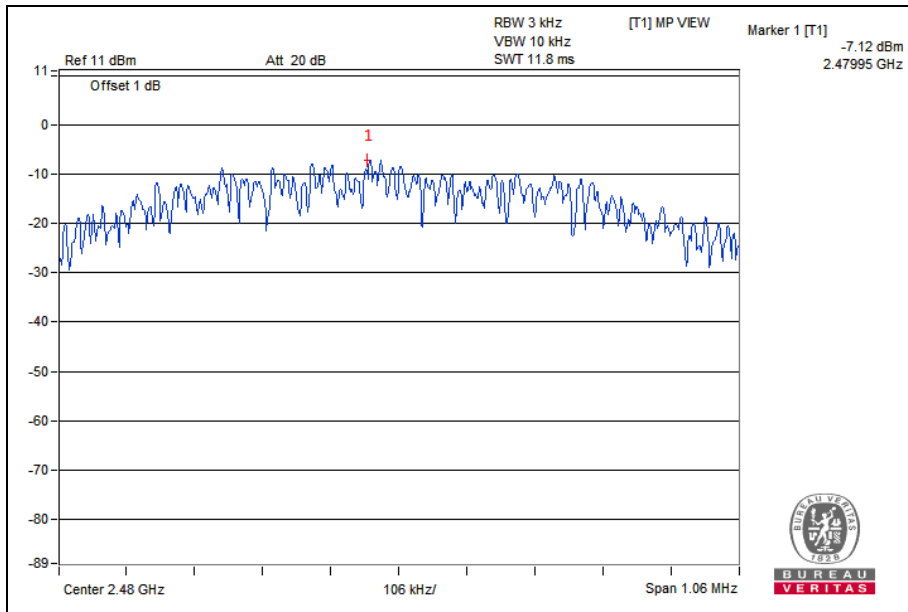

**Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

**BT-LE (GFSK) (2Mbps)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-13.18	8	PASS
19	2440	-13.68	8	PASS
39	2480	-13.89	8	PASS

**CH 0**

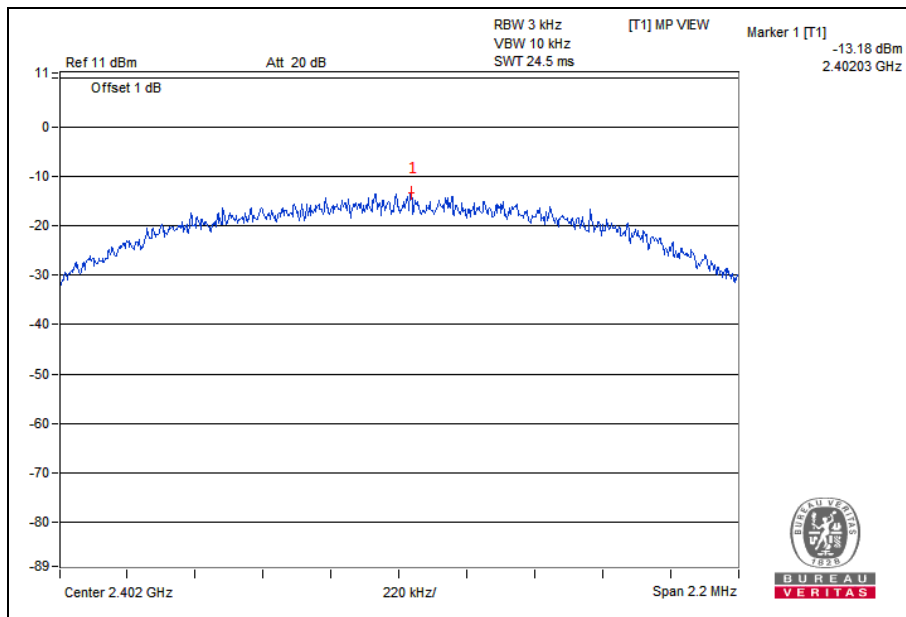

**Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.


Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

CH 19

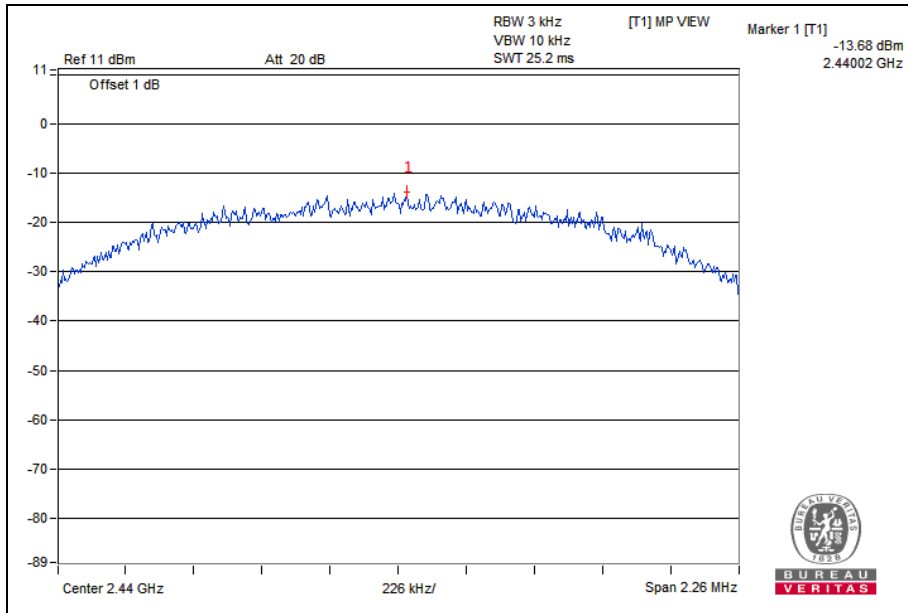

CH 39

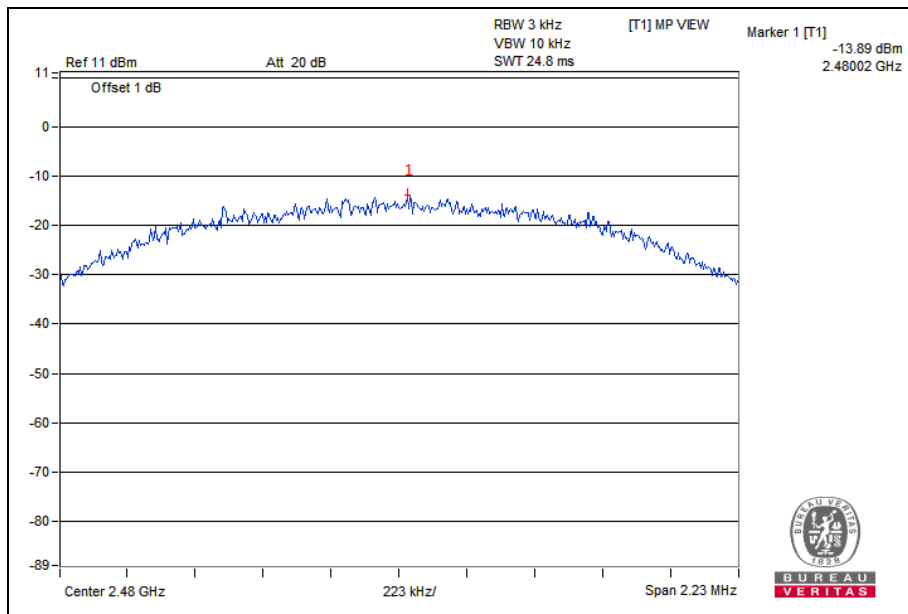

**Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)




## 4.5 OUT OF BAND EMISSION MEASUREMENT

### 4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.5.2 TEST SETUP

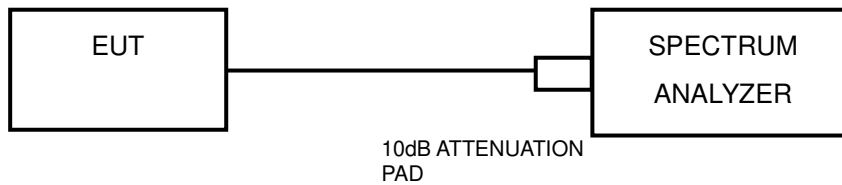

### 4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




BUREAU VERITAS

Test Report No.: RF2109WDG0341-2

### 4.5.7 TEST RESULTS

#### BT-LE (GFSK) (1Mbps)

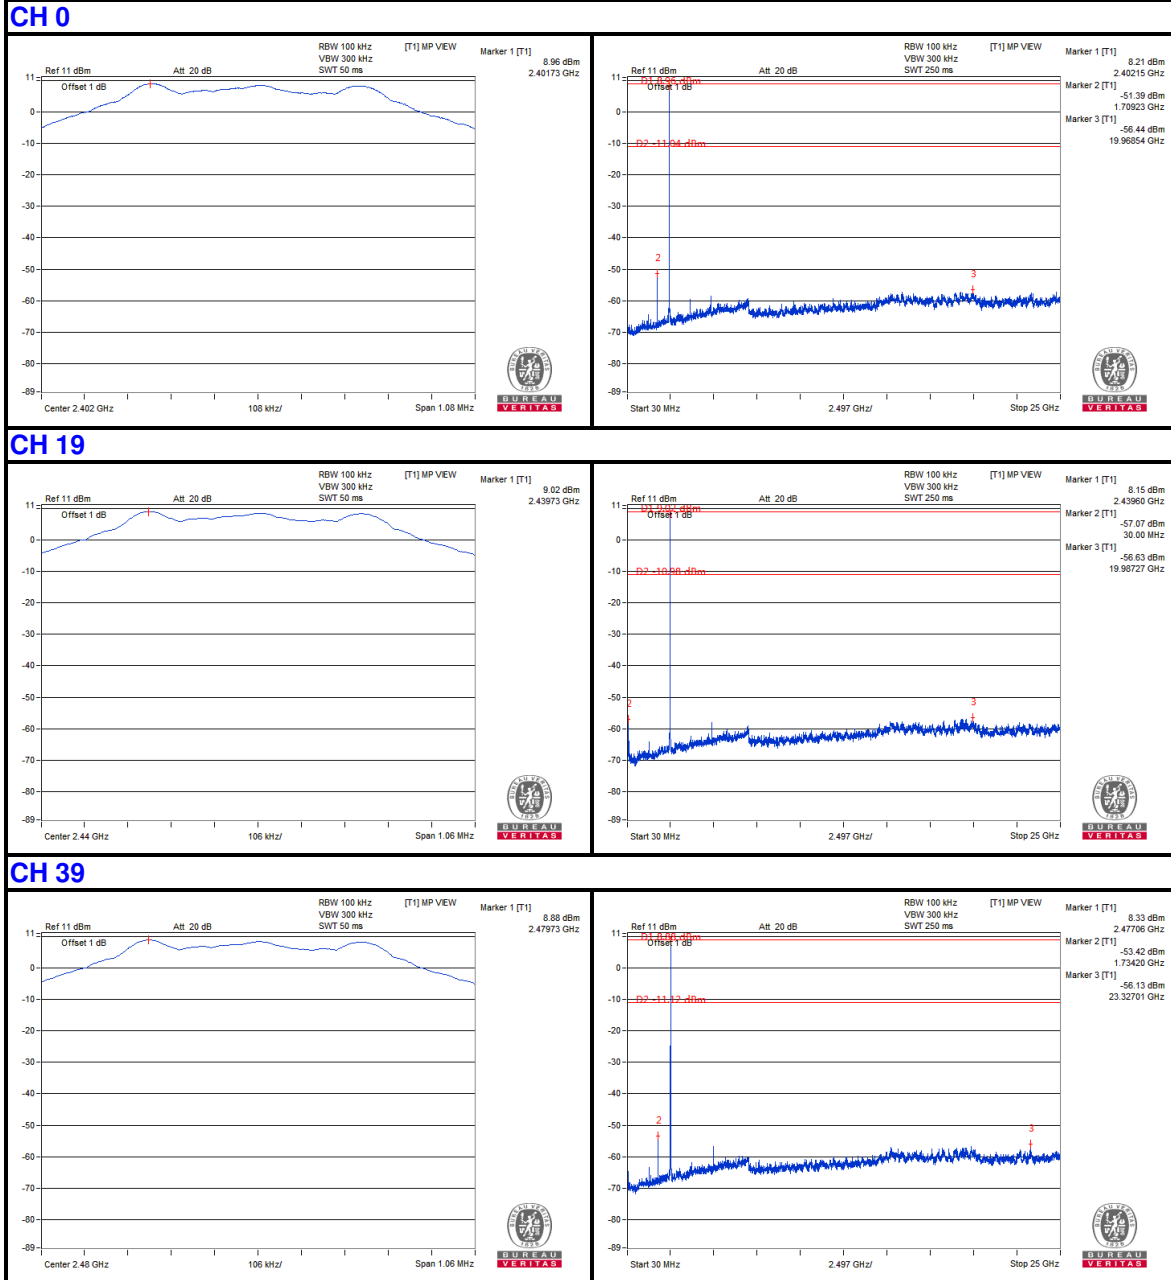

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942, People's Republic of China.


Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

### Band Edge (1Mbps):

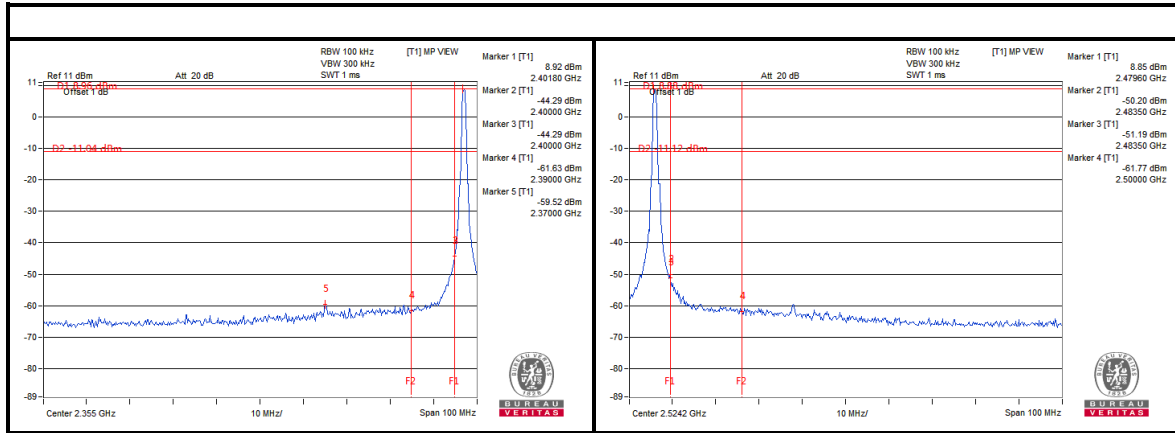

**Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942, People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)





BUREAU VERITAS



Test Report No.: RF2109WDG0341-2

### BT-LE (GFSK) (2Mbps)



#### CH 0

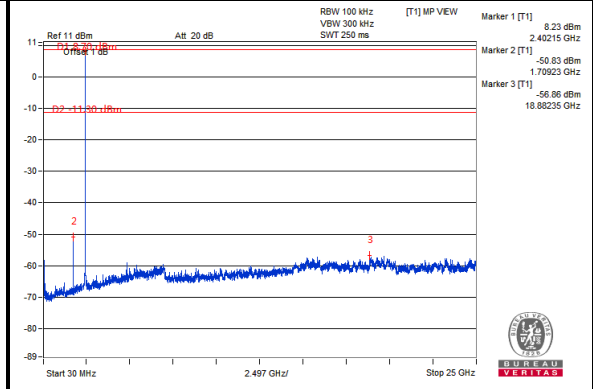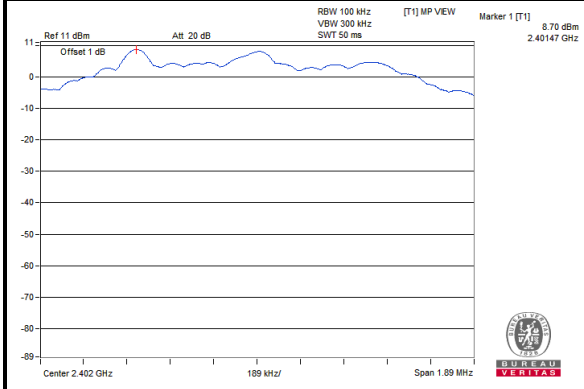

#### CH 19

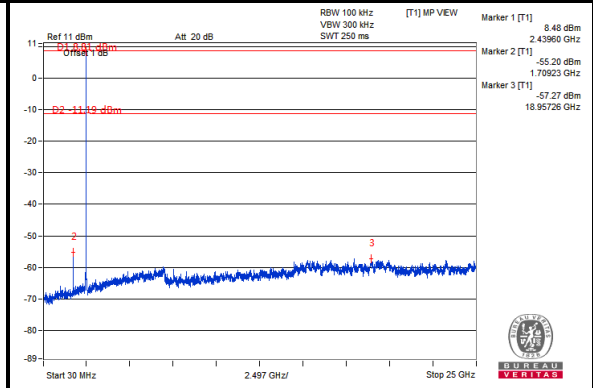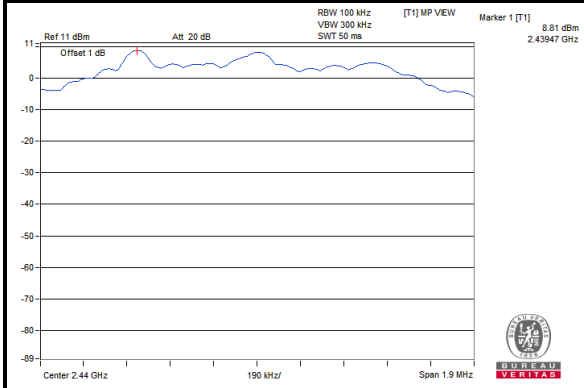

#### CH 39

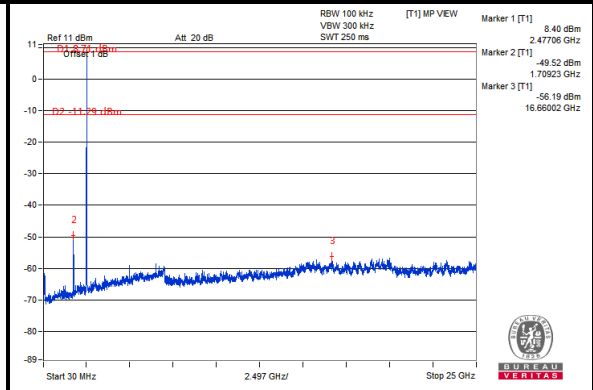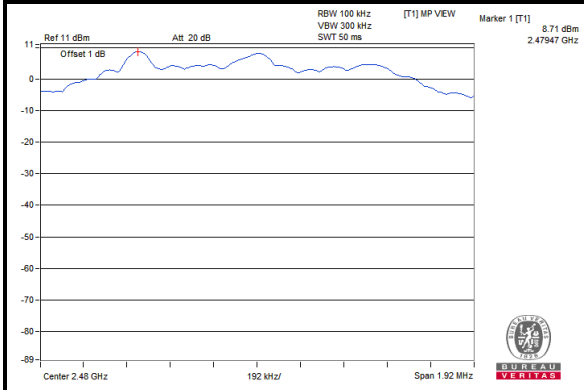

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)






**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

### Band Edge (2Mbps):

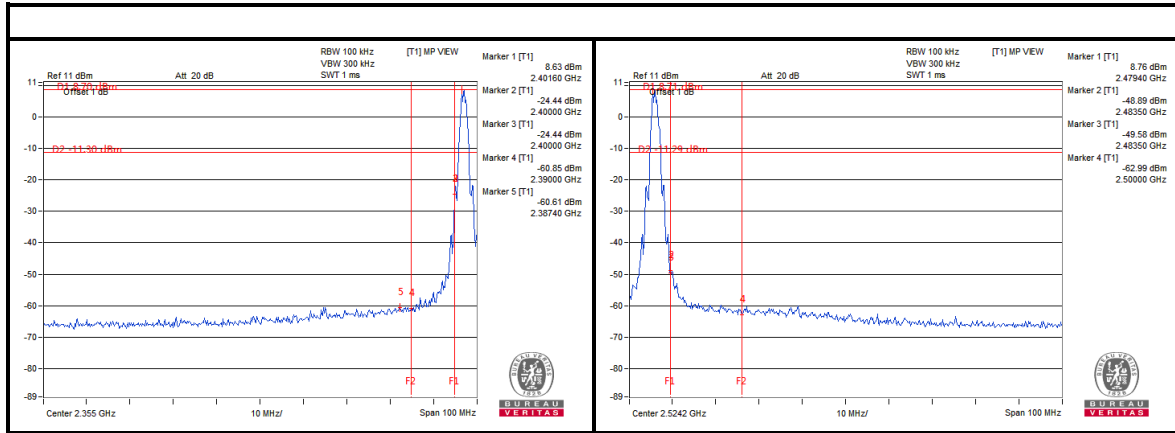

**Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: RF2109WDG0341-2

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**