

## FCC Test Report

**Report No.:** RF200131C05 R1

**FCC ID:** K7SWIZ001

**Test Model:** WIZ001, WIZ004 (refer to item 3.1 for more details)

**Received Date:** Jan. 31, 2020

**Test Date:** Feb. 07 ~ Feb. 27, 2020

**Issued Date:** May 14, 2020

**Applicant:** Belkin International, Inc.

**Address:** 12045 East Waterfront Drive, Playa Vista, CA 90094

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /** 788550 / TW0003  
**Designation Number:**



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>Release Control Record .....</b>                              | <b>3</b>  |
| <b>1 Certificate of Conformity .....</b>                         | <b>4</b>  |
| <b>2 Summary of Test Results .....</b>                           | <b>5</b>  |
| 2.1 Measurement Uncertainty .....                                | 5         |
| 2.2 Modification Record .....                                    | 5         |
| <b>3 General Information .....</b>                               | <b>6</b>  |
| 3.1 General Description of EUT .....                             | 6         |
| 3.2 Description of Test Modes .....                              | 7         |
| 3.2.1 Test Mode Applicability and Tested Channel Detail .....    | 8         |
| 3.3 Description of Support Units .....                           | 9         |
| 3.3.1 Configuration of System under Test .....                   | 9         |
| 3.4 General Description of Applied Standards .....               | 9         |
| <b>4 Test Types and Results .....</b>                            | <b>11</b> |
| 4.1 Radiated Emission and Bandedge Measurement .....             | 11        |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement ..... | 11        |
| 4.1.2 Test Instruments .....                                     | 12        |
| 4.1.3 Test Procedures .....                                      | 13        |
| 4.1.4 Deviation from Test Standard .....                         | 13        |
| 4.1.5 Test Set Up .....                                          | 14        |
| 4.1.6 EUT Operating Conditions .....                             | 15        |
| 4.1.7 Test Results .....                                         | 16        |
| 4.2 Conducted Emission Measurement .....                         | 41        |
| 4.2.1 Limits of Conducted Emission Measurement .....             | 41        |
| 4.2.2 Test Instruments .....                                     | 41        |
| 4.2.3 Test Procedures .....                                      | 42        |
| 4.2.4 Deviation from Test Standard .....                         | 42        |
| 4.2.5 Test Setup .....                                           | 42        |
| 4.2.6 EUT Operating Conditions .....                             | 42        |
| 4.2.7 Test Results .....                                         | 43        |
| <b>5 Pictures of Test Arrangements .....</b>                     | <b>53</b> |
| <b>Appendix – Information of the Testing Laboratories .....</b>  | <b>54</b> |

### Release Control Record

| Issue No.      | Description          | Date Issued   |
|----------------|----------------------|---------------|
| RF200131C05    | Original release     | Mar. 05, 2020 |
| RF200131C05 R1 | Revised product name | May 14, 2020  |

## 1 Certificate of Conformity

**Product:** BOOST↑CHARGE™ 3-1 Wireless Charger for iPhone + Apple Watch + AirPods,  
BOOST↑CHARGE™ 3-1 Wireless Charger Special Edition for iPhone + Apple Watch  
+ AirPods (refer to item 3.1 for more details)

**Brand:** belkin

**Test Model:** WIZ001, WIZ004 (refer to item 3.1 for more details)

**Sample Status:** Engineering sample

**Applicant:** Belkin International, Inc.

**Test Date:** Feb. 07 ~ Feb. 27, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.209)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Celine Chou , **Date:** May 14, 2020  
Celine Chou / Senior Specialist

**Approved by :** Bruce Chen , **Date:** May 14, 2020  
Bruce Chen / Senior Project Engineer

## 2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.209) |                             |        |                                                                                 |
|------------------------------------------------|-----------------------------|--------|---------------------------------------------------------------------------------|
| FCC Clause                                     | Test Item                   | Result | Remarks                                                                         |
| 15.207                                         | AC Power Conducted Emission | Pass   | Meet the requirement of limit. Minimum passing margin is -9.48dB at 0.43543MHz. |
| 15.209                                         | Radiated Emission Test      | Pass   | Meet the requirement of limit. Minimum passing margin is -6.30dB at 536.1400MHz |

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                        | Frequency        | Expanded Uncertainty (k=2) (±) |
|------------------------------------|------------------|--------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz   | 2.94 dB                        |
| Radiated Emissions up to 1 GHz     | 9kHz ~ 30MHz     | 3.04 dB                        |
|                                    | 30MHz ~ 200MHz   | 3.86 dB                        |
|                                    | 200MHz ~ 1000MHz | 3.87 dB                        |

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

|                                                    |                                                                                                                                                              |
|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product                                            | BOOST↑CHARGE™ 3-1 Wireless Charger for iPhone + Apple Watch + AirPods, BOOST↑CHARGE™ 3-1 Wireless Charger Special Edition for iPhone + Apple Watch + AirPods |
| Brand                                              | belkin                                                                                                                                                       |
| Test Model                                         | WIZ001, WIZ004                                                                                                                                               |
| Sample Status                                      | Engineering sample                                                                                                                                           |
| Power Supply Rating                                | 15Vdc (adapter)                                                                                                                                              |
| Modulation Type                                    | FSK                                                                                                                                                          |
| Operating Frequency                                | 127.8 kHz for iPhone<br>111-148 kHz for AirPods<br>326.5 kHz for Apple watch                                                                                 |
| Antenna Type                                       | Coil antenna                                                                                                                                                 |
| Field Strength                                     | 127.8 kHz: 71.06dBuV/m<br>147.5 kHz: 65.95dBuV/m<br>326.5 kHz: 41.30dBuV/m                                                                                   |
| Dimension for iPhone charging coil                 | 19.20cm <sup>2</sup> (Length = 48mm, width = 40mm)                                                                                                           |
| Dimension for AirPods charging coil                | 13.85cm <sup>2</sup> (diameter = 42mm)                                                                                                                       |
| Dimension for Apple watch inductive coil           | 3.80cm <sup>2</sup> (diameter = 22mm)                                                                                                                        |
| Accessory Device                                   | Adapter                                                                                                                                                      |
| Data Cable Supplied                                | NA                                                                                                                                                           |
| Maximum Power Output for Phone charging coil       | 10W                                                                                                                                                          |
| Maximum Power Output for AirPods charging coil     | 5W                                                                                                                                                           |
| Maximum Power Output for Apple watch charging coil | 5W                                                                                                                                                           |

Note:

1. The following models are provided to this EUT.

| Brand  | Model  | Difference                                                                                                                                |
|--------|--------|-------------------------------------------------------------------------------------------------------------------------------------------|
| belkin | WIZ001 | 1. oval-shaped<br>2. plastics base and stem<br>3. BOOST↑CHARGE™ 3-1 Wireless Charger for iPhone + Apple Watch + AirPods                   |
|        | WIZ004 | 1. full-moon shaped<br>2. metal base and stem<br>3. BOOST↑CHARGE™ 3-1 Wireless Charger Special Edition for iPhone + Apple Watch + AirPods |

\* After pre-test, the model of the WIZ004 was chosen for final test.

2. The EUT uses following adapter.

|              |                                                |
|--------------|------------------------------------------------|
| Brand        | belkin                                         |
| Model        | 2ADH023H NJ                                    |
| Input Power  | 100-240Vac, 50/60Hz, 0.7A Max                  |
| Output Power | 15Vdc, 1.5A                                    |
| Power Line   | 1.5m DC cable without core attached on adapter |

3. 326.5kHz mode is for Apple watch charging. Metal band is the worst case for final tests after pretesting plastic band and metal band.

### 3.2 Description of Test Modes

3 channels are provided to this EUT

| Channel | Freq. (kHz) |
|---------|-------------|
| 1       | 127.8       |
| 2       | 147.5       |
| 3       | 326.5       |

### 3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO |     | DESCRIPTION                                                              |
|--------------------|---------------|-----|--------------------------------------------------------------------------|
|                    | RE<1G         | PLC |                                                                          |
| A                  | √             | √   | Charging Mode (EUT wireless charging to iPhone)                          |
| B                  | √             | √   | Charging Mode (EUT wireless charging to AirPods)                         |
| C                  | √             | √   | Charging Mode (EUT wireless charging to Apple Watch)                     |
| D                  | √             | √   | Charging Mode (EUT wireless charging to iPhone, Apple Watch and AirPods) |
| E                  | √             | √   | Standby Mode                                                             |

Where **RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

Note: The EUT is designed to be positioned on the **X-plane** only.

#### **Radiated Emission Test (Below 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel |
|--------------------|-------------------|----------------|
| A                  | 1, 2, 3           | 1              |
| B                  | 1, 2, 3           | 2              |
| C                  | 1, 2, 3           | 3              |
| D                  | 1, 2, 3           | 1, 2, 3        |
| E                  | 1, 2, 3           | 1, 2, 3        |

#### **Power Line Conducted Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel |
|--------------------|-------------------|----------------|
| A                  | 1, 2, 3           | 1              |
| B                  | 1, 2, 3           | 2              |
| C                  | 1, 2, 3           | 3              |
| D                  | 1, 2, 3           | 1, 2, 3        |
| E                  | 1, 2, 3           | 1, 2, 3        |

#### **Test Condition:**

| Applicable To   | Environmental Conditions | Input Power  | Tested by                |
|-----------------|--------------------------|--------------|--------------------------|
| <b>RE&lt;1G</b> | 23 deg. C, 66% RH        | 120Vac, 60Hz | Jones Chang<br>Titan Hsu |
| <b>PLC</b>      | 23 deg. C, 68% RH        | 120Vac, 60Hz | Jones Chang              |



### 3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product     | Brand | Model No.           | Serial No. | FCC ID | Remarks |
|----|-------------|-------|---------------------|------------|--------|---------|
| A. | iPhone      | APPLE | A2215               | NA         | NA     | -       |
| B. | AirPods     | APPLE | A2031, A2032, A1938 | NA         | NA     | -       |
| C. | Apple Watch | APPLE | A1977               | NA         | NA     | -       |


#### 3.3.1 Configuration of System under Test

Charging Mode:


Test Mode A

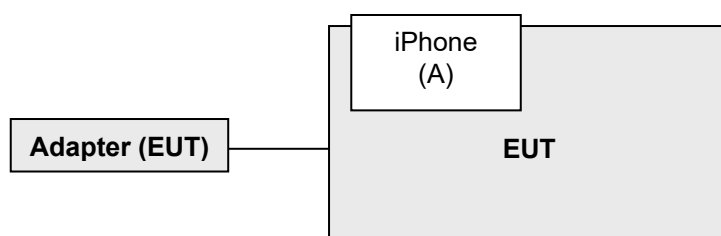


Test Mode B

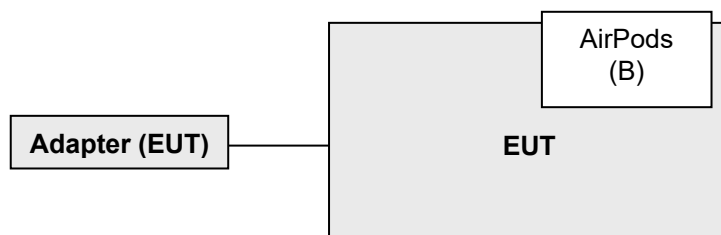


Test Mode C

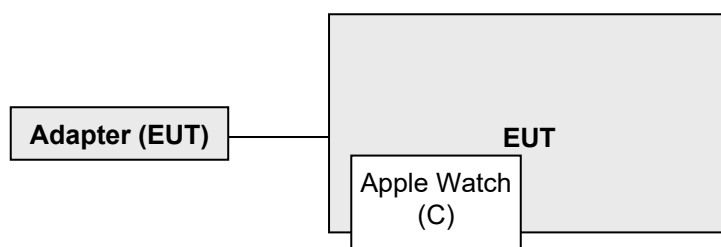

Test Mode D

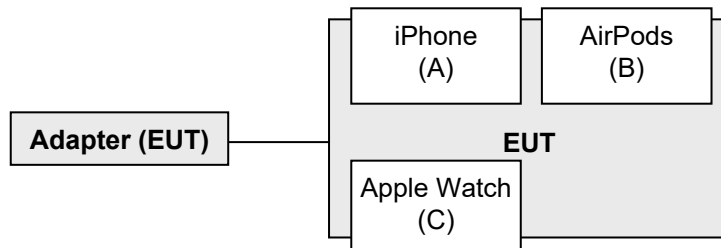

Standby Mode:  
Test Mode E

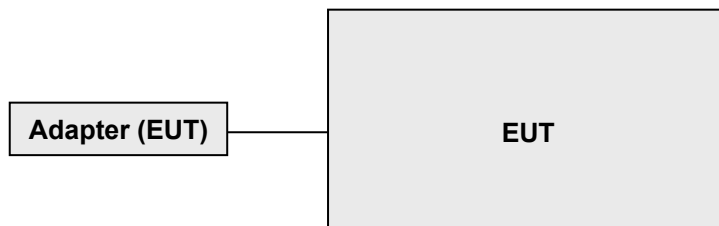

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.209)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

##### FOR FREQUENCY BELOW 30MHz

| Frequency<br>(MHz) | Field Strength (dBuV/m) |             | Measurement Distance<br>(meters) |
|--------------------|-------------------------|-------------|----------------------------------|
|                    | uV/m                    | dBuV/m      |                                  |
| 0.009 – 0.490      | 2400 / F (kHz)          | 48.52-13.80 | 300                              |
| 0.490 – 1.705      | 24000 / F (kHz)         | 33.80-22.97 | 30                               |
| 1.705 – 30.0       | 30                      | 29.54       | 30                               |

##### FOR FREQUENCY BETWEEN 30-1000MHz

| Frequency<br>(MHz) | Class A (at 10m) |        | Class B (at 3m) |        |
|--------------------|------------------|--------|-----------------|--------|
|                    | uV/m             | dBuV/m | uV/m            | dBuV/m |
| 30-88              | 90               | 39.1   | 100             | 40.0   |
| 88-216             | 150              | 43.5   | 150             | 43.5   |
| 216-960            | 210              | 46.4   | 200             | 46.0   |
| Above 960          | 300              | 49.5   | 500             | 54.0   |

#### 4.1.2 Test Instruments

| Description & Manufacturer                | Model No.                             | Serial No.                      | Cal. Date     | Cal. Due      |
|-------------------------------------------|---------------------------------------|---------------------------------|---------------|---------------|
| Test Receiver<br>ROHDE & SCHWARZ          | ESIB7                                 | 100187                          | May 30, 2019  | May 29, 2020  |
| BILOG Antenna<br>SCHWARZBECK              | VULB9168                              | 9168-171                        | Nov. 11, 2019 | Nov. 10, 2020 |
| HORN Antenna<br>SCHWARZBECK               | 9120D                                 | 209                             | Nov. 24, 2019 | Nov. 23, 2020 |
| HORN Antenna<br>SCHWARZBECK               | BBHA 9170                             | BBHA9170241                     | Nov. 24, 2019 | Nov. 23, 2020 |
| Loop Antenna<br>TESEQ                     | HLA 6121                              | 45745                           | Jul. 01, 2019 | Jun. 30, 2020 |
| Preamplifier<br>Agilent<br>(Below 1GHz)   | 8447D                                 | 2944A10738                      | Aug. 20, 2019 | Aug. 19, 2020 |
| Preamplifier<br>Agilent<br>(Above 1GHz)   | 8449B                                 | 3008A02465                      | Mar. 27, 2019 | Mar. 26, 2020 |
| RF Coaxial Cable<br>WOKEN<br>With 5dB PAD | 8D-FB                                 | Cable-CH3-01                    | Aug. 20, 2019 | Aug. 19, 2020 |
| RF signal cable<br>HUBER+SUHNER           | SUCOFLEX 104                          | Cable-CH3-03<br>(223653/4)      | Aug. 20, 2019 | Aug. 19, 2020 |
| RF signal cable<br>HUBER+SUHNER&<br>EMCI  | SUCOFLEX<br>104&EMC104-SM-S<br>M-8000 | Cable-CH3-03<br>(309224+170907) | Aug. 20, 2019 | Aug. 19, 2020 |
| Software<br>BV ADT                        | ADT_Radiated_<br>V7.6.15.9.5          | NA                              | NA            | NA            |
| Antenna Tower<br>inn-co GmbH              | MA 4000                               | 013303                          | NA            | NA            |
| Antenna Tower Controller<br>BV ADT        | AT100                                 | AT93021702                      | NA            | NA            |
| Turn Table<br>BV ADT                      | TT100                                 | TT93021702                      | NA            | NA            |
| Turn Table Controller<br>BV ADT           | SC100                                 | SC93021702                      | NA            | NA            |
| Boresight Antenna Fixture                 | FBA-01                                | FBA-SIP01                       | NA            | NA            |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Chamber 3.

#### 4.1.3 Test Procedures

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### For Radiated emission below 30MHz

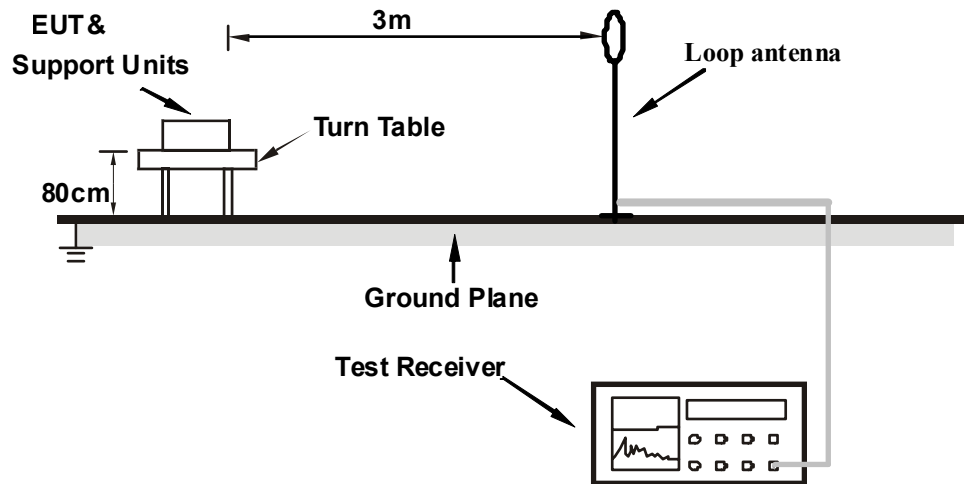

##### For Radiated emission 30MHz to 1GHz

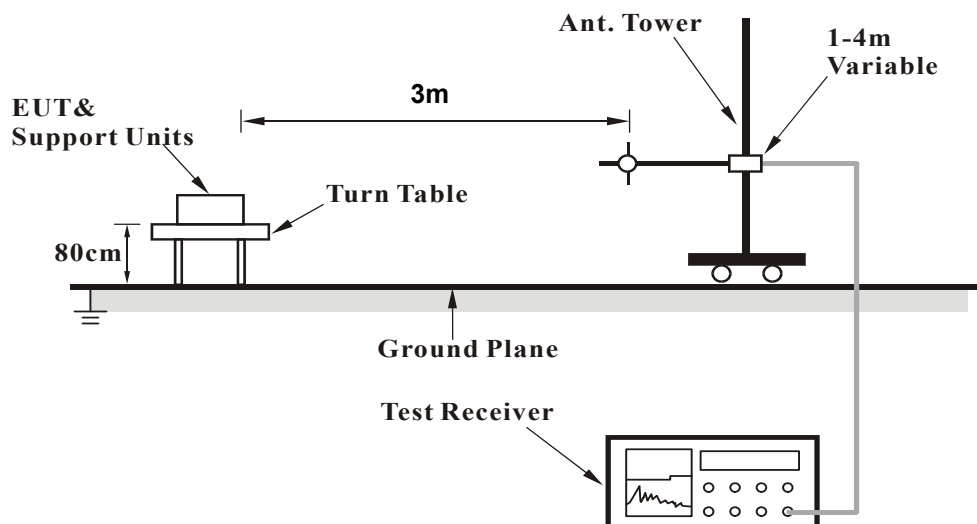

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

##### Charging Mode:

###### Test Mode A

- a. The EUT powered by adapter.
- b. Put the iPhone on the EUT (wireless charging) during the test.

###### Test Mode B

- a. The EUT powered by adapter.
- b. Put the AirPods on the EUT (wireless charging) during the test.

###### Test Mode C

- c. The EUT powered by adapter.
- d. Put the Apple Watch on the EUT (wireless charging) during the test.

###### Test Mode D

- a. The EUT powered by adapter.
- b. Put the iPhone, Apple Watch and AirPods on the EUT (wireless charging) during the test.

##### Standby Mode:

###### Test Mode E

- a. The EUT powered by adapter.

#### 4.1.7 Test Results

Below 30MHz Data:


Charging Mode

|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 1   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | A              |                   |                                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                           | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                             | *0.1278     | 70.71 AV                | 105.49         | -34.78      | 1.00               | 219                  | 51.66            | 19.05                    |
| 2                                                             | 1.8800      | 37.20 QP                | 69.50          | -32.30      | 1.00               | 260                  | 17.30            | 19.90                    |
| 3                                                             | 2.8300      | 47.00 QP                | 69.50          | -22.50      | 1.00               | 7                    | 27.10            | 19.90                    |
| 4                                                             | 13.3100     | 42.50 QP                | 69.50          | -27.00      | 1.00               | 63                   | 20.70            | 21.80                    |
| 5                                                             | 15.2200     | 44.30 QP                | 69.50          | -25.20      | 1.00               | 316                  | 22.40            | 21.90                    |
| 6                                                             | 18.5300     | 47.50 QP                | 69.50          | -22.00      | 1.00               | 139                  | 25.50            | 22.00                    |
| 7                                                             | 21.9200     | 47.70 QP                | 69.50          | -21.80      | 1.00               | 30                   | 25.60            | 22.10                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

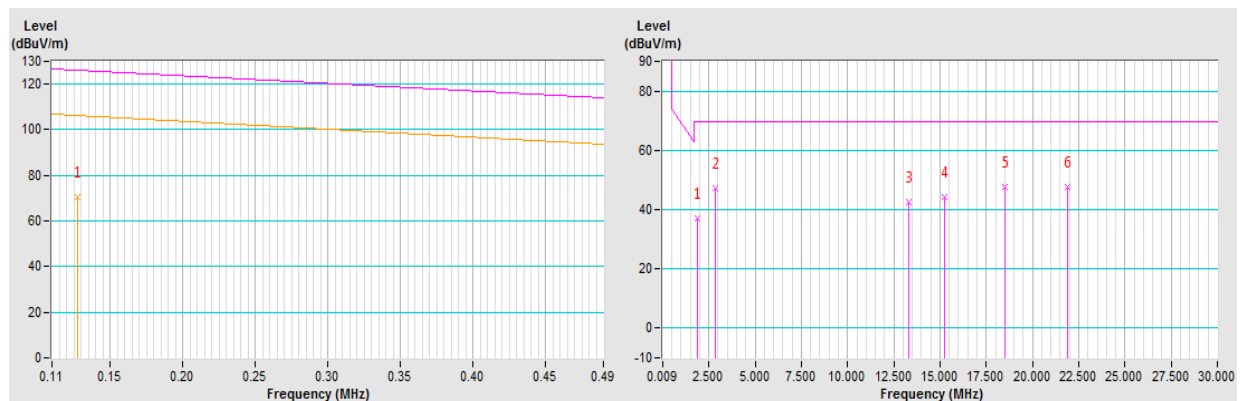




|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 1   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | A              |                   |                                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                                  | *0.1278     | 65.93 AV                | 105.49         | -39.56      | 1.00               | 193                  | 46.88            | 19.05                    |
| 2                                                                  | 2.9400      | 40.20 QP                | 69.50          | -29.30      | 1.00               | 91                   | 20.30            | 19.90                    |
| 3                                                                  | 6.7900      | 35.50 QP                | 69.50          | -34.00      | 1.00               | 251                  | 14.80            | 20.70                    |
| 4                                                                  | 18.9500     | 40.50 QP                | 69.50          | -29.00      | 1.00               | 34                   | 18.50            | 22.00                    |
| 5                                                                  | 23.9400     | 40.30 QP                | 69.50          | -29.20      | 1.00               | 163                  | 18.20            | 22.10                    |
| 6                                                                  | 26.3500     | 39.40 QP                | 69.50          | -30.10      | 1.00               | 254                  | 17.30            | 22.10                    |
| 7                                                                  | 27.4000     | 44.60 QP                | 69.50          | -24.90      | 1.00               | 69                   | 22.40            | 22.20                    |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

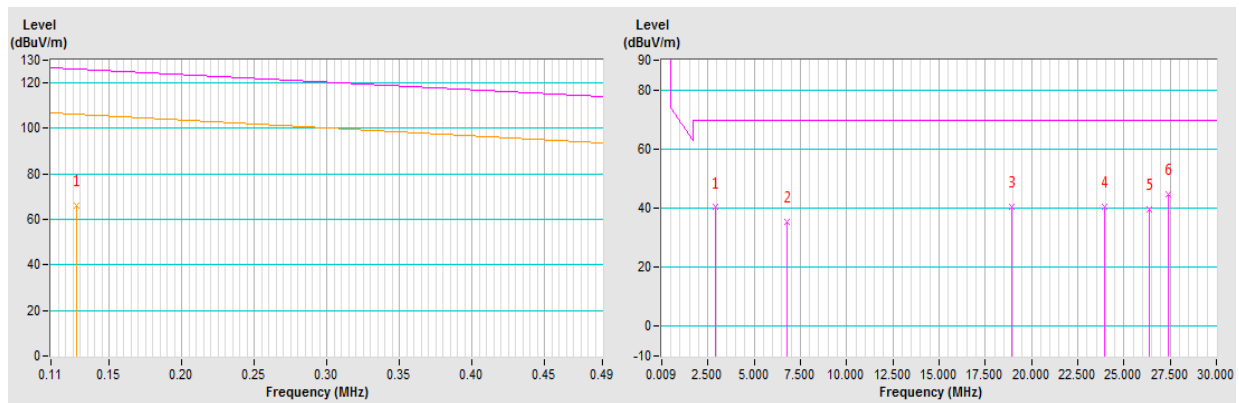


|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 1   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | A              |                   |                                 |

**ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *0.1278     | 64.23 AV                | 105.49         | -41.26      | 1.00               | 15                   | 45.18            | 19.05                    |
| 2   | 2.9400      | 43.90 QP                | 69.50          | -25.60      | 1.00               | 205                  | 24.00            | 19.90                    |
| 3   | 13.7100     | 39.20 QP                | 69.50          | -30.30      | 1.00               | 53                   | 17.40            | 21.80                    |
| 4   | 17.8900     | 39.40 QP                | 69.50          | -30.10      | 1.00               | 130                  | 17.40            | 22.00                    |
| 5   | 18.9500     | 41.50 QP                | 69.50          | -28.00      | 1.00               | 134                  | 19.50            | 22.00                    |
| 6   | 23.4600     | 45.30 QP                | 69.50          | -24.20      | 1.00               | 318                  | 23.20            | 22.10                    |
| 7   | 25.2900     | 49.80 QP                | 69.50          | -19.70      | 1.00               | 94                   | 27.70            | 22.10                    |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

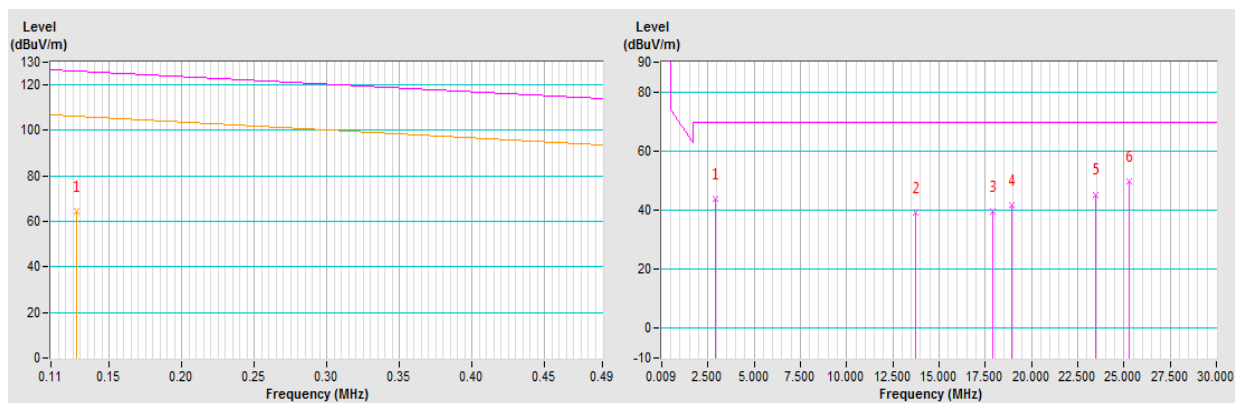


|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 2   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | B              |                   |                                 |

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *0.1475     | 65.24 AV                | 104.25         | -39.01      | 1.00               | 270                  | 46.11            | 19.13                    |
| 2   | 3.0400      | 44.00 QP                | 69.50          | -25.50      | 1.00               | 312                  | 24.10            | 19.90                    |
| 3   | 14.7200     | 40.80 QP                | 69.50          | -28.70      | 1.00               | 13                   | 18.90            | 21.90                    |
| 4   | 17.8900     | 38.20 QP                | 69.50          | -31.30      | 1.00               | 5                    | 16.20            | 22.00                    |
| 5   | 23.1800     | 47.90 QP                | 69.50          | -21.60      | 1.00               | 310                  | 25.80            | 22.10                    |
| 6   | 23.9400     | 46.40 QP                | 69.50          | -23.10      | 1.00               | 224                  | 24.30            | 22.10                    |
| 7   | 26.3500     | 41.20 QP                | 69.50          | -28.30      | 1.00               | 57                   | 19.10            | 22.10                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

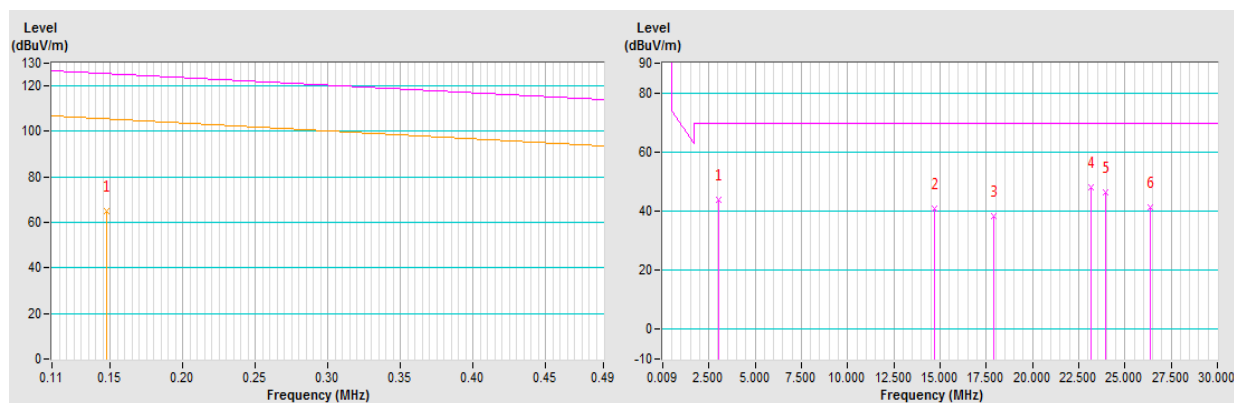


|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 2   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | B              |                   |                                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                                  | *0.1475     | 63.88 AV                | 104.25         | -40.37      | 1.00               | 333                  | 44.75            | 19.13                    |
| 2                                                                  | 2.8400      | 39.50 QP                | 69.50          | -30.00      | 1.00               | 119                  | 19.60            | 19.90                    |
| 3                                                                  | 6.7900      | 34.30 QP                | 69.50          | -35.20      | 1.00               | 200                  | 13.60            | 20.70                    |
| 4                                                                  | 11.8300     | 35.60 QP                | 69.50          | -33.90      | 1.00               | 204                  | 13.90            | 21.70                    |
| 5                                                                  | 18.9500     | 39.80 QP                | 69.50          | -29.70      | 1.00               | 82                   | 17.80            | 22.00                    |
| 6                                                                  | 24.0900     | 36.60 QP                | 69.50          | -32.90      | 1.00               | 64                   | 14.50            | 22.10                    |
| 7                                                                  | 27.4000     | 39.80 QP                | 69.50          | -29.70      | 1.00               | 81                   | 17.60            | 22.20                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

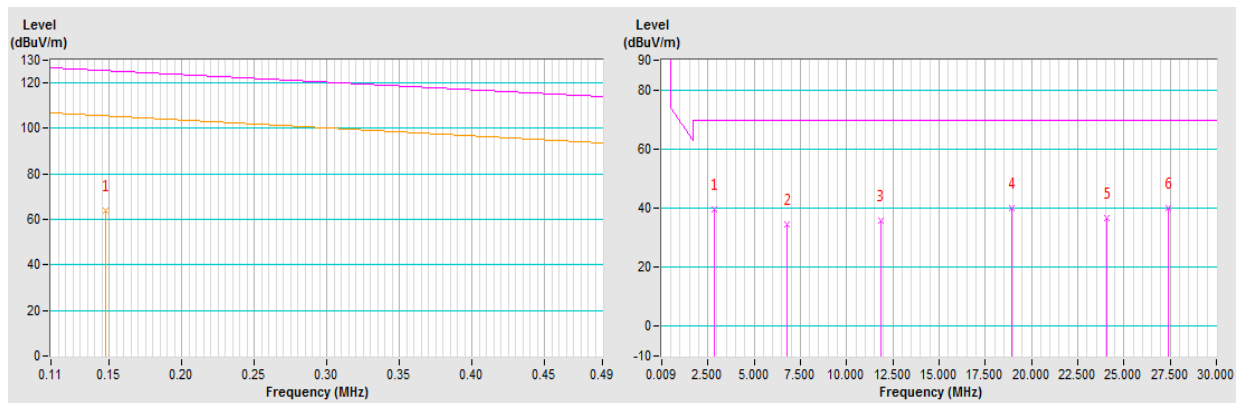


|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 2   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | B              |                   |                                 |

#### ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *0.1475     | 64.36 AV                | 104.25         | -39.89      | 1.00               | 222                  | 45.23            | 19.13                    |
| 2   | 2.8900      | 44.70 QP                | 69.50          | -24.80      | 1.00               | 108                  | 24.80            | 19.90                    |
| 3   | 13.7100     | 38.60 QP                | 69.50          | -30.90      | 1.00               | 283                  | 16.80            | 21.80                    |
| 4   | 18.9500     | 42.70 QP                | 69.50          | -26.80      | 1.00               | 331                  | 20.70            | 22.00                    |
| 5   | 19.7600     | 41.80 QP                | 69.50          | -27.70      | 1.00               | 133                  | 19.70            | 22.10                    |
| 6   | 26.3500     | 44.10 QP                | 69.50          | -25.40      | 1.00               | 78                   | 22.00            | 22.10                    |
| 7   | 27.4000     | 44.50 QP                | 69.50          | -25.00      | 1.00               | 39                   | 22.30            | 22.20                    |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

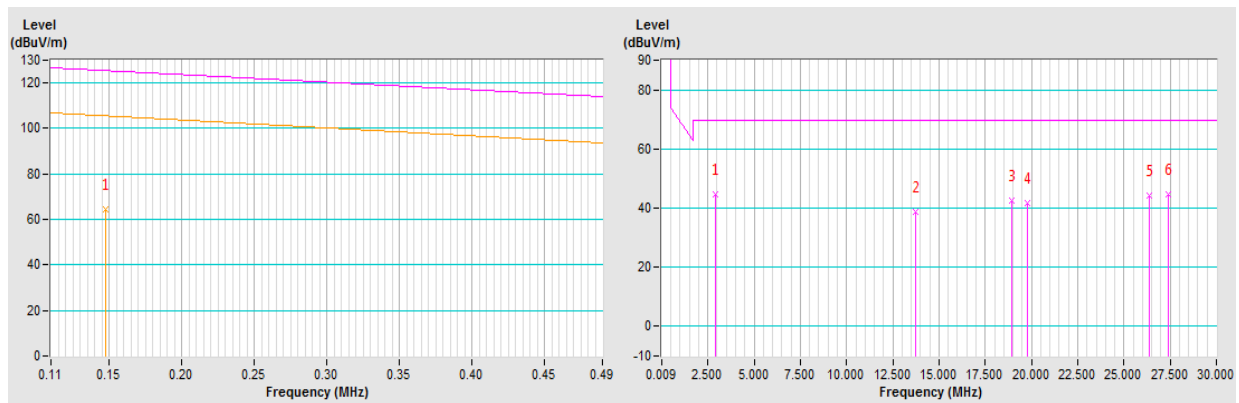


|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 3   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | C              |                   |                                 |

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *0.3265        | 40.05 AV                      | 97.33             | -57.28         | 1.00                     | 51                         | 20.30                  | 19.75                          |
| 2   | 2.8900         | 39.70 QP                      | 69.50             | -29.80         | 1.00                     | 33                         | 19.80                  | 19.90                          |
| 3   | 17.6500        | 38.10 QP                      | 69.50             | -31.40         | 1.00                     | 182                        | 16.10                  | 22.00                          |
| 4   | 18.7100        | 40.00 QP                      | 69.50             | -29.50         | 1.00                     | 22                         | 18.00                  | 22.00                          |
| 5   | 19.7600        | 40.00 QP                      | 69.50             | -29.50         | 1.00                     | 319                        | 17.90                  | 22.10                          |
| 6   | 25.2900        | 39.50 QP                      | 69.50             | -30.00         | 1.00                     | 276                        | 17.40                  | 22.10                          |
| 7   | 29.3800        | 36.40 QP                      | 69.50             | -33.10         | 1.00                     | 318                        | 14.20                  | 22.20                          |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

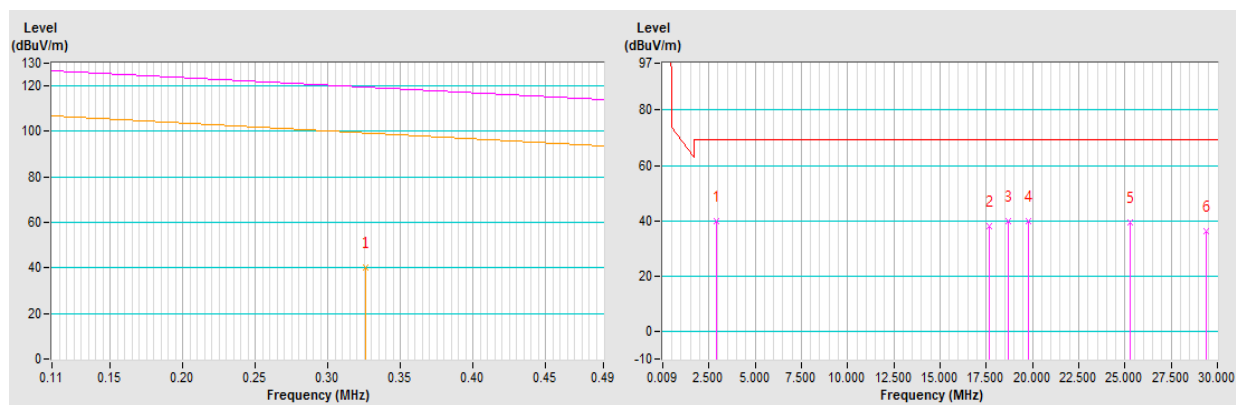


|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 3   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | C              |                   |                                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                                  | *0.3265     | 39.22 AV                | 97.33          | -58.11      | 1.00               | 251                  | 19.47            | 19.75                    |
| 2                                                                  | 2.8400      | 39.50 QP                | 69.50          | -30.00      | 1.00               | 156                  | 19.60            | 19.90                    |
| 3                                                                  | 7.1200      | 34.00 QP                | 69.50          | -35.50      | 1.00               | 162                  | 13.20            | 20.80                    |
| 4                                                                  | 11.8800     | 34.60 QP                | 69.50          | -34.90      | 1.00               | 71                   | 12.90            | 21.70                    |
| 5                                                                  | 17.7000     | 35.10 QP                | 69.50          | -34.40      | 1.00               | 244                  | 13.10            | 22.00                    |
| 6                                                                  | 26.3500     | 38.00 QP                | 69.50          | -31.50      | 1.00               | 65                   | 15.90            | 22.10                    |
| 7                                                                  | 27.4000     | 38.30 QP                | 69.50          | -31.20      | 1.00               | 259                  | 16.10            | 22.20                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

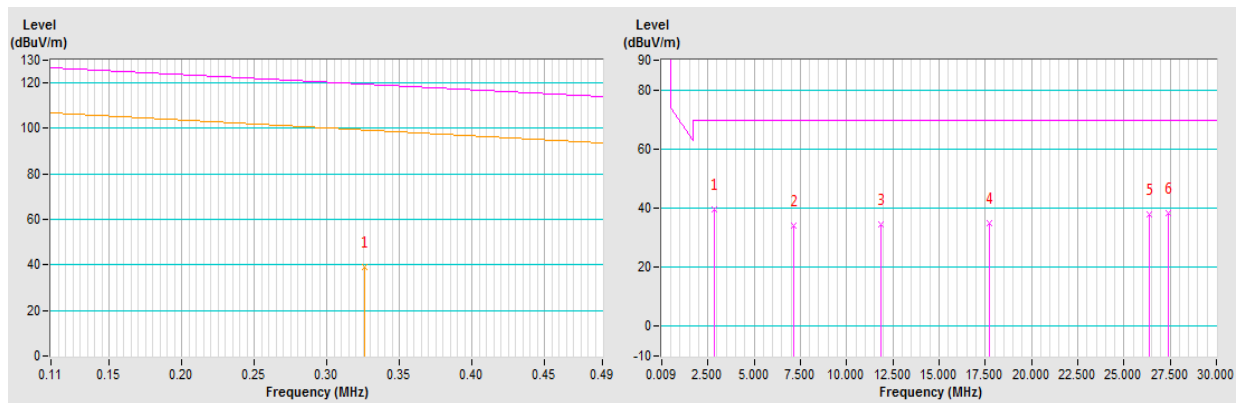


|                 |                |                   |                                 |
|-----------------|----------------|-------------------|---------------------------------|
| Channel         | TX Channel 3   | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz |                   |                                 |
| Test Mode       | C              |                   |                                 |

#### ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *0.3265     | 39.03 AV                | 97.33          | -58.30      | 1.00               | 21                   | 19.28            | 19.75                    |
| 2   | 2.9400      | 38.60 QP                | 69.50          | -30.90      | 1.00               | 266                  | 18.70            | 19.90                    |
| 3   | 13.7100     | 38.60 QP                | 69.50          | -30.90      | 1.00               | 174                  | 16.80            | 21.80                    |
| 4   | 16.8300     | 38.00 QP                | 69.50          | -31.50      | 1.00               | 152                  | 16.00            | 22.00                    |
| 5   | 18.9500     | 38.80 QP                | 69.50          | -30.70      | 1.00               | 87                   | 16.80            | 22.00                    |
| 6   | 20.0000     | 38.90 QP                | 69.50          | -30.60      | 1.00               | 4                    | 16.80            | 22.10                    |
| 7   | 28.4600     | 36.10 QP                | 69.50          | -33.40      | 1.00               | 223                  | 13.90            | 22.20                    |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

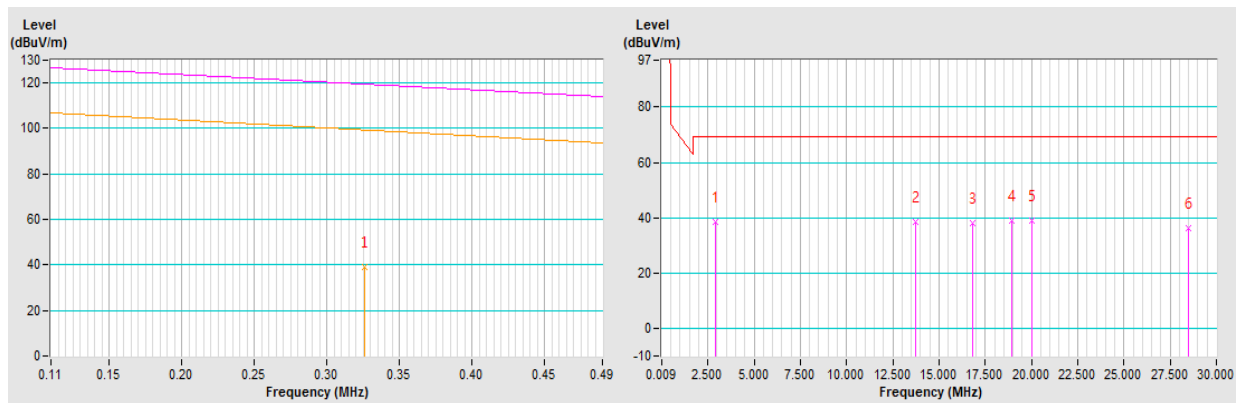




|                 |                      |                   |                                 |
|-----------------|----------------------|-------------------|---------------------------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz       |                   |                                 |
| Test Mode       | D                    |                   |                                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                           | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                             | *0.1278     | 71.06 AV                | 105.49         | -34.43      | 1.00               | 311                  | 52.01            | 19.05                    |
| 2                                                             | *0.1475     | 65.95 AV                | 104.25         | -38.30      | 1.00               | 279                  | 46.82            | 19.13                    |
| 3                                                             | *0.3265     | 41.30 AV                | 97.33          | -56.03      | 1.00               | 50                   | 21.55            | 19.75                    |
| 4                                                             | 2.8400      | 42.90 QP                | 69.50          | -26.60      | 1.00               | 133                  | 23.00            | 19.90                    |
| 5                                                             | 13.5600     | 39.20 QP                | 69.50          | -30.30      | 1.00               | 252                  | 17.40            | 21.80                    |
| 6                                                             | 18.9500     | 41.70 QP                | 69.50          | -27.80      | 1.00               | 79                   | 19.70            | 22.00                    |
| 7                                                             | 23.5100     | 39.90 QP                | 69.50          | -29.60      | 1.00               | 357                  | 17.80            | 22.10                    |
| 8                                                             | 23.9400     | 41.80 QP                | 69.50          | -27.70      | 1.00               | 1                    | 19.70            | 22.10                    |
| 9                                                             | 26.3500     | 36.20 QP                | 69.50          | -33.30      | 1.00               | 38                   | 14.10            | 22.10                    |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

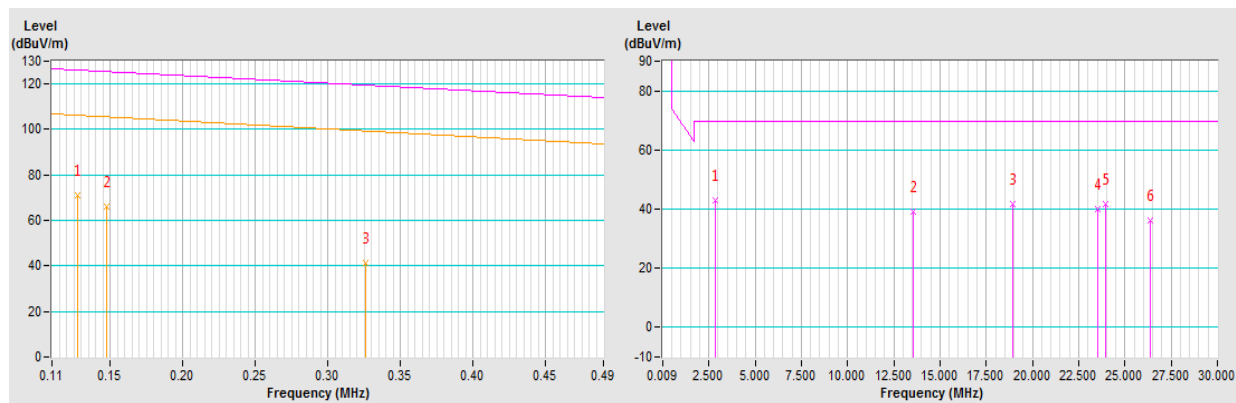


|                 |                      |                   |                                 |
|-----------------|----------------------|-------------------|---------------------------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz       |                   |                                 |
| Test Mode       | D                    |                   |                                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                                  | *0.1278     | 68.77 AV                | 105.49         | -36.72      | 1.00               | 202                  | 49.72            | 19.05                    |
| 2                                                                  | *0.1475     | 63.66 AV                | 104.25         | -40.59      | 1.00               | 293                  | 44.53            | 19.13                    |
| 3                                                                  | *0.3265     | 40.22 AV                | 97.33          | -57.11      | 1.00               | 233                  | 20.47            | 19.75                    |
| 4                                                                  | 2.8900      | 39.90 QP                | 69.50          | -29.60      | 1.00               | 216                  | 20.00            | 19.90                    |
| 5                                                                  | 8.2300      | 34.50 QP                | 69.50          | -35.00      | 1.00               | 6                    | 13.40            | 21.10                    |
| 6                                                                  | 13.9000     | 35.50 QP                | 69.50          | -34.00      | 1.00               | 5                    | 13.70            | 21.80                    |
| 7                                                                  | 20.0000     | 37.30 QP                | 69.50          | -32.20      | 1.00               | 115                  | 15.20            | 22.10                    |
| 8                                                                  | 24.4700     | 37.70 QP                | 69.50          | -31.80      | 1.00               | 189                  | 15.60            | 22.10                    |
| 9                                                                  | 26.3500     | 39.10 QP                | 69.50          | -30.40      | 1.00               | 314                  | 17.00            | 22.10                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

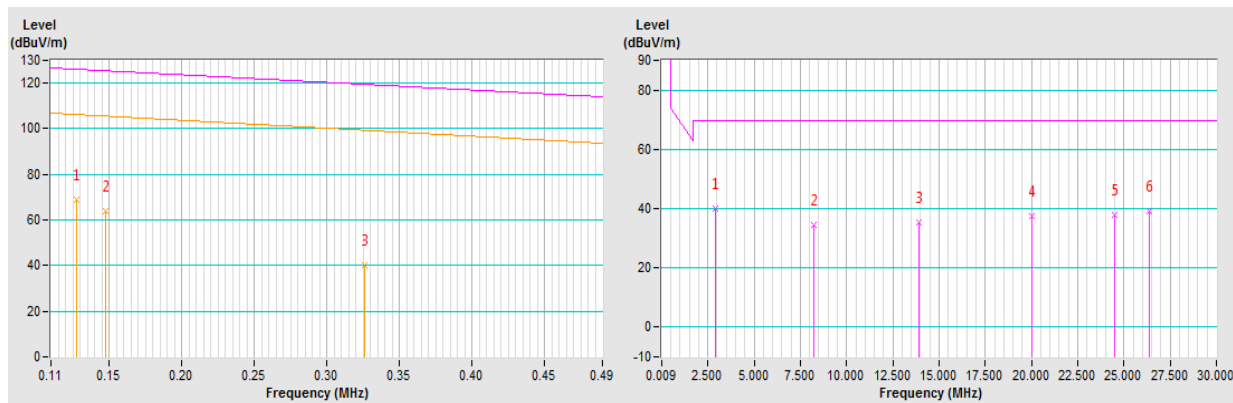


|                 |                      |                   |                                 |
|-----------------|----------------------|-------------------|---------------------------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz       |                   |                                 |
| Test Mode       | D                    |                   |                                 |

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *0.1278        | 66.56 AV                      | 105.49            | -38.93         | 1.00                     | 255                        | 47.51                  | 19.05                          |
| 2   | *0.1475        | 63.66 AV                      | 104.25            | -40.59         | 1.00                     | 293                        | 44.53                  | 19.13                          |
| 3   | *0.3265        | 39.89 AV                      | 97.33             | -57.44         | 1.00                     | 166                        | 20.14                  | 19.75                          |
| 4   | 2.9400         | 43.30 QP                      | 69.50             | -26.20         | 1.00                     | 111                        | 23.40                  | 19.90                          |
| 5   | 16.8300        | 40.00 QP                      | 69.50             | -29.50         | 1.00                     | 341                        | 18.00                  | 22.00                          |
| 6   | 18.9500        | 42.20 QP                      | 69.50             | -27.30         | 1.00                     | 203                        | 20.20                  | 22.00                          |
| 7   | 20.8200        | 38.10 QP                      | 69.50             | -31.40         | 1.00                     | 78                         | 16.00                  | 22.10                          |
| 8   | 26.3500        | 41.90 QP                      | 69.50             | -27.60         | 1.00                     | 253                        | 19.80                  | 22.10                          |
| 9   | 27.4000        | 44.70 QP                      | 69.50             | -24.80         | 1.00                     | 348                        | 22.50                  | 22.20                          |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

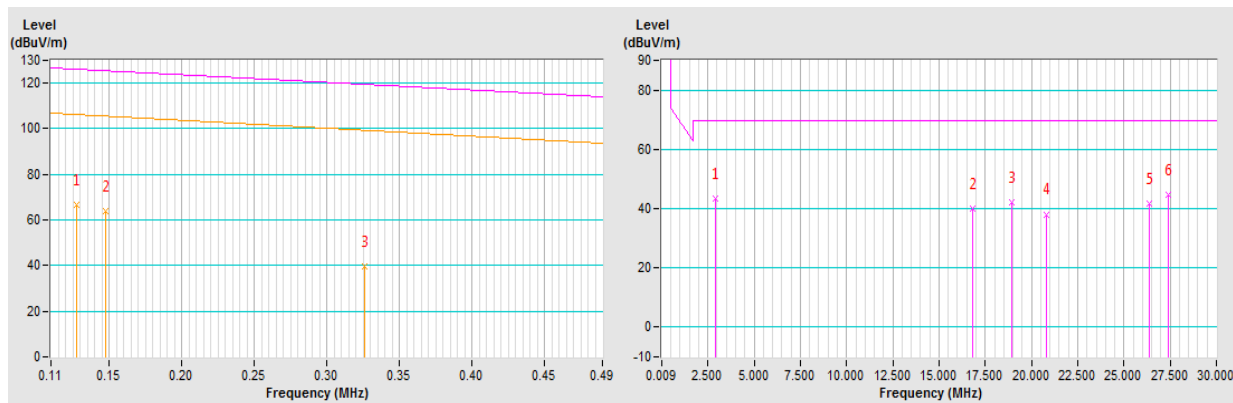


## Standby Mode

|                 |                      |                   |                 |
|-----------------|----------------------|-------------------|-----------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Average (AV)    |
| Frequency Range | 9 kHz ~ 30 MHz       |                   | Quasi-Peak (QP) |
| Test Mode       | E                    |                   |                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                           | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                             | *0.1278     | 68.59 AV                | 105.49         | -36.90      | 1.00               | 353                  | 49.54            | 19.05                    |
| 2                                                             | *0.1475     | 39.46 AV                | 104.41         | -64.95      | 1.00               | 206                  | 20.34            | 19.12                    |
| 3                                                             | *0.3265     | 37.48 AV                | 97.33          | -59.85      | 1.00               | 1                    | 17.73            | 19.75                    |
| 4                                                             | 2.9400      | 44.30 QP                | 69.50          | -25.20      | 1.00               | 69                   | 24.40            | 19.90                    |
| 5                                                             | 13.6600     | 39.20 QP                | 69.50          | -30.30      | 1.00               | 252                  | 17.40            | 21.80                    |
| 6                                                             | 16.8300     | 41.50 QP                | 69.50          | -28.00      | 1.00               | 213                  | 19.50            | 22.00                    |
| 7                                                             | 17.8900     | 41.60 QP                | 69.50          | -27.90      | 1.00               | 274                  | 19.60            | 22.00                    |
| 8                                                             | 18.9500     | 44.10 QP                | 69.50          | -25.40      | 1.00               | 102                  | 22.10            | 22.00                    |
| 9                                                             | 23.1800     | 44.30 QP                | 69.50          | -25.20      | 1.00               | 17                   | 22.20            | 22.10                    |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

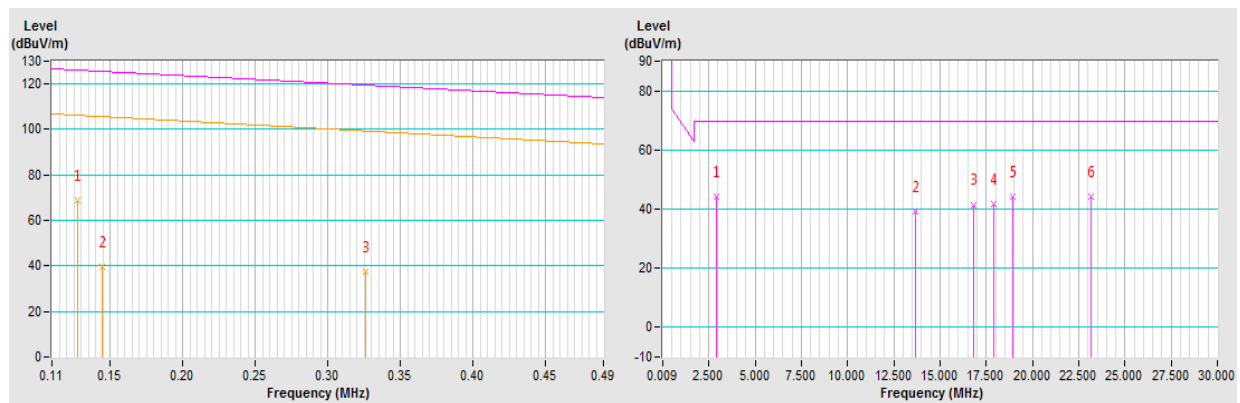


|                 |                      |                   |                                 |
|-----------------|----------------------|-------------------|---------------------------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz       |                   |                                 |
| Test Mode       | E                    |                   |                                 |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                                  | *0.1278     | 64.11 AV                | 105.49         | -41.38      | 1.00               | 200                  | 45.06            | 19.05                    |
| 2                                                                  | *0.1475     | 33.75 AV                | 104.41         | -70.66      | 1.00               | 339                  | 14.63            | 19.12                    |
| 3                                                                  | *0.3260     | 33.15 AV                | 97.33          | -64.18      | 1.00               | 53                   | 13.40            | 19.75                    |
| 4                                                                  | 2.8400      | 40.20 QP                | 69.50          | -29.30      | 1.00               | 245                  | 20.30            | 19.90                    |
| 5                                                                  | 19.7600     | 39.10 QP                | 69.50          | -30.40      | 1.00               | 91                   | 17.00            | 22.10                    |
| 6                                                                  | 24.9100     | 44.10 QP                | 69.50          | -25.40      | 1.00               | 43                   | 22.00            | 22.10                    |
| 7                                                                  | 25.2900     | 44.90 QP                | 69.50          | -24.60      | 1.00               | 146                  | 22.80            | 22.10                    |
| 8                                                                  | 26.3500     | 40.10 QP                | 69.50          | -29.40      | 1.00               | 310                  | 18.00            | 22.10                    |
| 9                                                                  | 27.4000     | 43.90 QP                | 69.50          | -25.60      | 1.00               | 280                  | 21.70            | 22.20                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

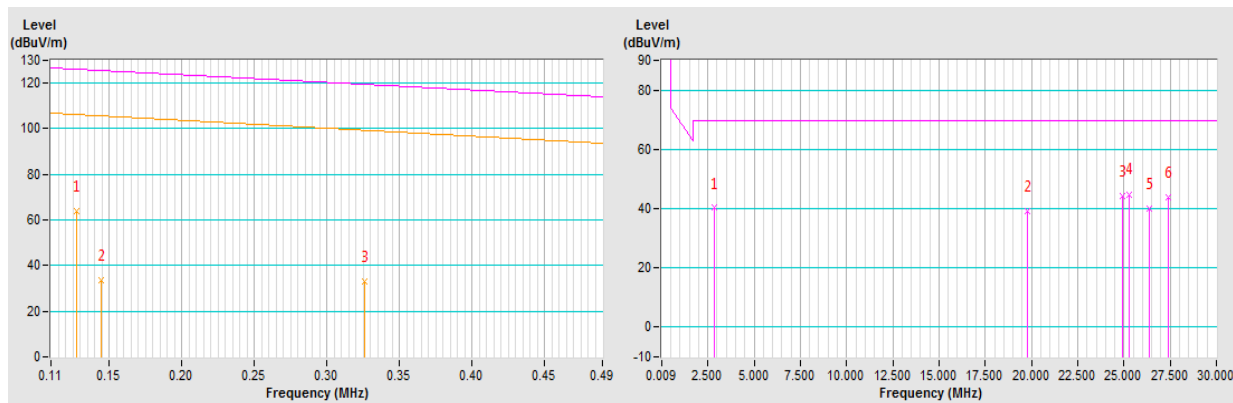


|                 |                      |                   |                                 |
|-----------------|----------------------|-------------------|---------------------------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Average (AV)<br>Quasi-Peak (QP) |
| Frequency Range | 9 kHz ~ 30 MHz       |                   |                                 |
| Test Mode       | E                    |                   |                                 |

**ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *0.1278     | 61.88 AV                | 105.49         | -43.61      | 1.00               | 199                  | 42.83            | 19.05                    |
| 2   | *0.1475     | 30.96 AV                | 104.41         | -73.45      | 1.00               | 26                   | 11.84            | 19.12                    |
| 3   | *0.3265     | 30.22 AV                | 97.33          | -67.11      | 1.00               | 347                  | 10.47            | 19.75                    |
| 4   | 2.8900      | 44.50 QP                | 69.50          | -25.00      | 1.00               | 232                  | 24.60            | 19.90                    |
| 5   | 23.1800     | 50.80 QP                | 69.50          | -18.70      | 1.00               | 275                  | 28.70            | 22.10                    |
| 6   | 23.9400     | 50.40 QP                | 69.50          | -19.10      | 1.00               | 271                  | 28.30            | 22.10                    |
| 7   | 24.6200     | 49.70 QP                | 69.50          | -19.80      | 1.00               | 136                  | 27.60            | 22.10                    |
| 8   | 25.2900     | 47.30 QP                | 69.50          | -22.20      | 1.00               | 68                   | 25.20            | 22.10                    |
| 9   | 27.4000     | 44.60 QP                | 69.50          | -24.90      | 1.00               | 30                   | 22.40            | 22.20                    |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

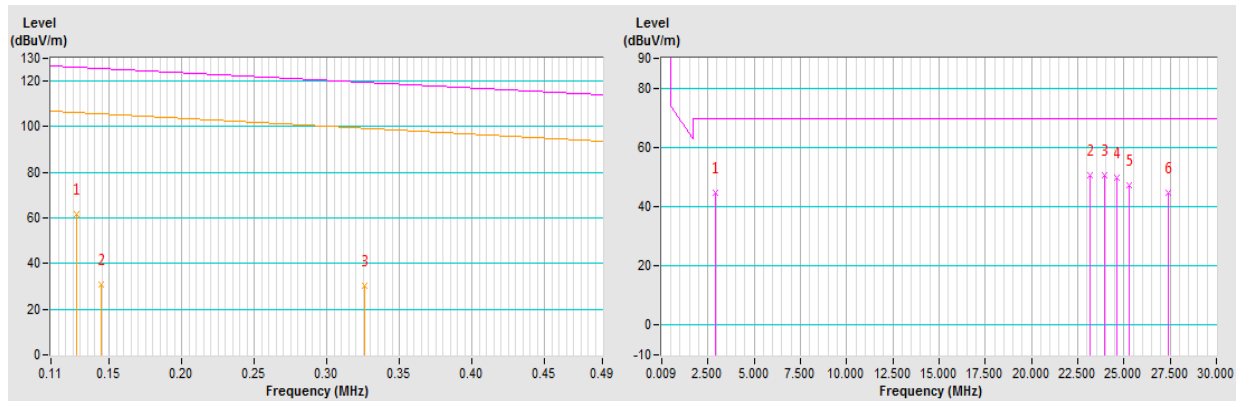

Below 1GHz Data:


Charging Mode

|                 |              |                   |                 |
|-----------------|--------------|-------------------|-----------------|
| Channel         | TX Channel 1 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz |                   |                 |
| Test Mode       | A            |                   |                 |

| Antenna Polarity & Test Distance: Horizontal At 3m |             |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 31.4100     | 31.30 QP                | 40.00          | -8.70       | 2.00 H             | 62                   | 42.00            | -10.70                   |
| 2                                                  | 79.2100     | 25.10 QP                | 40.00          | -14.90      | 2.00 H             | 298                  | 38.10            | -13.00                   |
| 3                                                  | 159.3500    | 33.90 QP                | 43.50          | -9.60       | 1.51 H             | 280                  | 42.40            | -8.50                    |
| 4                                                  | 274.6300    | 32.40 QP                | 46.00          | -13.60      | 1.00 H             | 148                  | 40.60            | -8.20                    |
| 5                                                  | 533.3300    | 34.50 QP                | 46.00          | -11.50      | 1.51 H             | 156                  | 35.30            | -0.80                    |
| 6                                                  | 703.4500    | 37.60 QP                | 46.00          | -8.40       | 1.00 H             | 12                   | 35.60            | 2.00                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

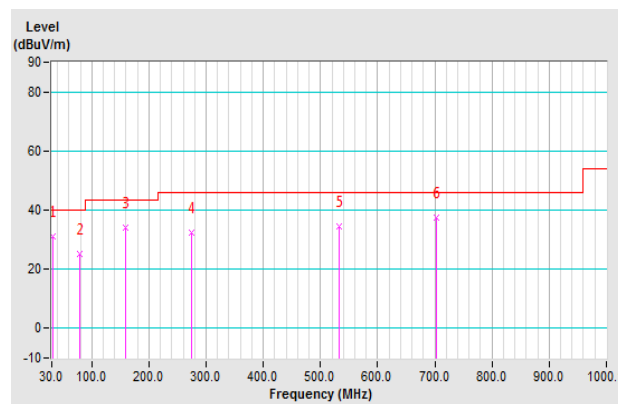


|                 |              |                   |                 |
|-----------------|--------------|-------------------|-----------------|
| Channel         | TX Channel 1 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz |                   |                 |
| Test Mode       | A            |                   |                 |

| Antenna Polarity & Test Distance: Vertical At 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                              | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                | 53.9000     | 31.50 QP                | 40.00          | -8.50       | 1.00 V             | 301                  | 40.40            | -8.90                    |
| 2                                                | 79.2100     | 25.70 QP                | 40.00          | -14.30      | 1.99 V             | 97                   | 38.70            | -13.00                   |
| 3                                                | 156.5300    | 28.50 QP                | 43.50          | -15.00      | 1.00 V             | 277                  | 37.10            | -8.60                    |
| 4                                                | 280.2600    | 29.00 QP                | 46.00          | -17.00      | 1.50 V             | 16                   | 37.00            | -8.00                    |
| 5                                                | 531.9200    | 38.50 QP                | 46.00          | -7.50       | 1.00 V             | 5                    | 39.30            | -0.80                    |
| 6                                                | 703.4500    | 38.20 QP                | 46.00          | -7.80       | 1.99 V             | 3                    | 36.20            | 2.00                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

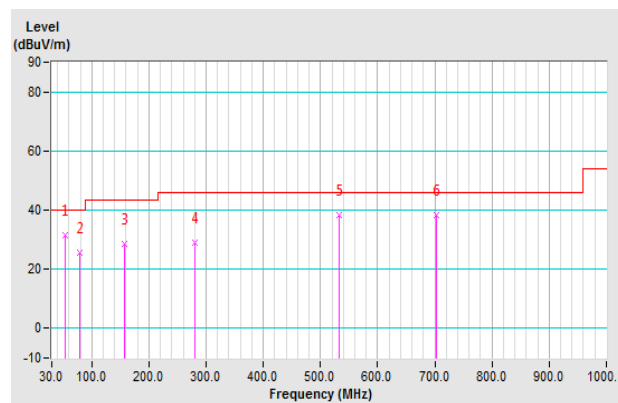




|                 |              |                   |                 |
|-----------------|--------------|-------------------|-----------------|
| Channel         | TX Channel 2 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz |                   |                 |
| Test Mode       | B            |                   |                 |

| Antenna Polarity & Test Distance: Horizontal At 3m |             |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 53.9000     | 22.70 QP                | 40.00          | -17.30      | 2.00 H             | 93                   | 31.60            | -8.90                    |
| 2                                                  | 79.2100     | 24.70 QP                | 40.00          | -15.30      | 2.00 H             | 172                  | 37.70            | -13.00                   |
| 3                                                  | 148.1000    | 24.30 QP                | 43.50          | -19.20      | 2.00 H             | 109                  | 33.00            | -8.70                    |
| 4                                                  | 156.5300    | 31.70 QP                | 43.50          | -11.80      | 2.00 H             | 109                  | 40.30            | -8.60                    |
| 5                                                  | 285.8800    | 28.40 QP                | 46.00          | -17.60      | 1.00 H             | 148                  | 36.30            | -7.90                    |
| 6                                                  | 529.1100    | 37.30 QP                | 46.00          | -8.70       | 1.49 H             | 167                  | 38.10            | -0.80                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

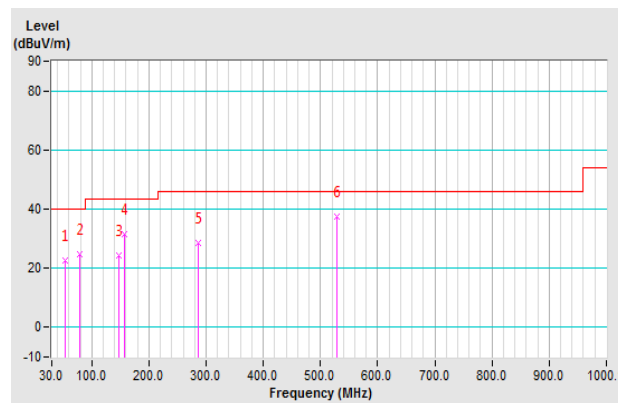


|                 |              |                   |                 |
|-----------------|--------------|-------------------|-----------------|
| Channel         | TX Channel 2 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz |                   |                 |
| Test Mode       | B            |                   |                 |

| Antenna Polarity & Test Distance: Vertical At 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                              | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                | 31.4100     | 32.50 QP                | 40.00          | -7.50       | 1.00 V             | 204                  | 43.20            | -10.70                   |
| 2                                                | 55.3100     | 32.10 QP                | 40.00          | -7.90       | 1.00 V             | 16                   | 41.00            | -8.90                    |
| 3                                                | 79.2100     | 24.70 QP                | 40.00          | -15.30      | 1.00 V             | 212                  | 37.70            | -13.00                   |
| 4                                                | 104.5100    | 21.30 QP                | 43.50          | -22.20      | 1.00 V             | 16                   | 33.70            | -12.40                   |
| 5                                                | 157.9400    | 24.50 QP                | 43.50          | -19.00      | 1.00 V             | 282                  | 33.00            | -8.50                    |
| 6                                                | 536.1400    | 39.70 QP                | 46.00          | -6.30       | 1.00 V             | 6                    | 40.50            | -0.80                    |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

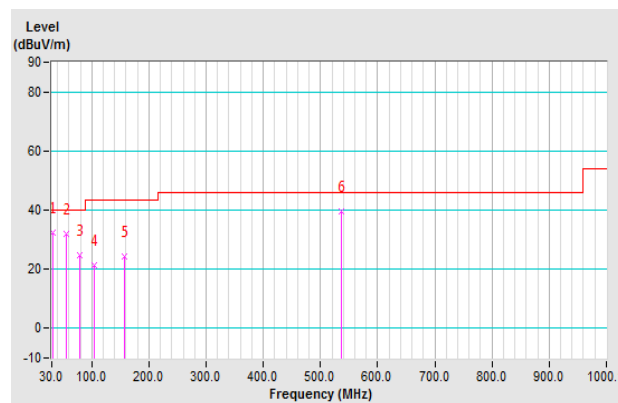


|                 |              |                   |                 |
|-----------------|--------------|-------------------|-----------------|
| Channel         | TX Channel 3 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz |                   |                 |
| Test Mode       | C            |                   |                 |

| Antenna Polarity & Test Distance: Horizontal At 3m |             |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 31.4100     | 28.00 QP                | 40.00          | -12.00      | 2.00 H             | 58                   | 38.70            | -10.70                   |
| 2                                                  | 79.2100     | 23.10 QP                | 40.00          | -16.90      | 1.00 H             | 119                  | 36.10            | -13.00                   |
| 3                                                  | 156.5300    | 30.70 QP                | 43.50          | -12.80      | 2.00 H             | 267                  | 39.30            | -8.60                    |
| 4                                                  | 287.2900    | 28.80 QP                | 46.00          | -17.20      | 1.00 H             | 168                  | 36.50            | -7.70                    |
| 5                                                  | 465.8400    | 29.60 QP                | 46.00          | -16.40      | 2.00 H             | 152                  | 31.80            | -2.20                    |
| 6                                                  | 574.1000    | 29.30 QP                | 46.00          | -16.70      | 1.51 H             | 152                  | 29.00            | 0.30                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

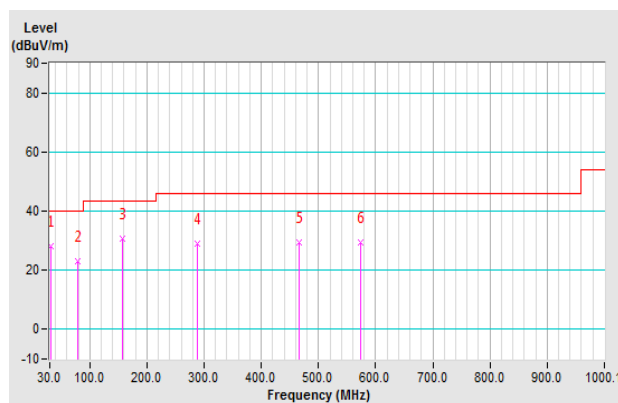


|                 |              |                   |                 |
|-----------------|--------------|-------------------|-----------------|
| Channel         | TX Channel 3 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz |                   |                 |
| Test Mode       | C            |                   |                 |

| Antenna Polarity & Test Distance: Vertical At 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                              | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                | 55.3100     | 32.70 QP                | 40.00          | -7.30       | 1.49 V             | 38                   | 41.60            | -8.90                    |
| 2                                                | 79.2100     | 23.30 QP                | 40.00          | -16.70      | 1.00 V             | 89                   | 36.30            | -13.00                   |
| 3                                                | 111.5400    | 20.70 QP                | 43.50          | -22.80      | 1.49 V             | 204                  | 32.50            | -11.80                   |
| 4                                                | 156.5300    | 24.50 QP                | 43.50          | -19.00      | 1.00 V             | 277                  | 33.10            | -8.60                    |
| 5                                                | 524.8900    | 29.80 QP                | 46.00          | -16.20      | 1.00 V             | 322                  | 30.70            | -0.90                    |
| 6                                                | 728.7500    | 30.30 QP                | 46.00          | -15.70      | 2.00 V             | 150                  | 27.80            | 2.50                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

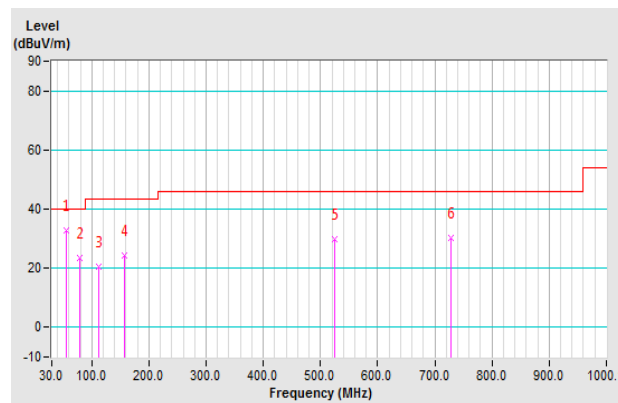


|                 |                      |                   |                 |
|-----------------|----------------------|-------------------|-----------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz         |                   |                 |
| Test Mode       | D                    |                   |                 |

| Antenna Polarity & Test Distance: Horizontal At 3m |             |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 31.4100     | 30.10 QP                | 40.00          | -9.90       | 2.00 H             | 144                  | 40.80            | -10.70                   |
| 2                                                  | 155.1300    | 33.30 QP                | 43.50          | -10.20      | 2.00 H             | 267                  | 41.90            | -8.60                    |
| 3                                                  | 278.8500    | 32.60 QP                | 46.00          | -13.40      | 1.00 H             | 154                  | 40.60            | -8.00                    |
| 4                                                  | 472.8700    | 28.80 QP                | 46.00          | -17.20      | 2.00 H             | 163                  | 30.90            | -2.10                    |
| 5                                                  | 635.9600    | 29.10 QP                | 46.00          | -16.90      | 1.49 H             | 10                   | 27.60            | 1.50                     |
| 6                                                  | 680.9500    | 30.00 QP                | 46.00          | -16.00      | 2.00 H             | 97                   | 28.00            | 2.00                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

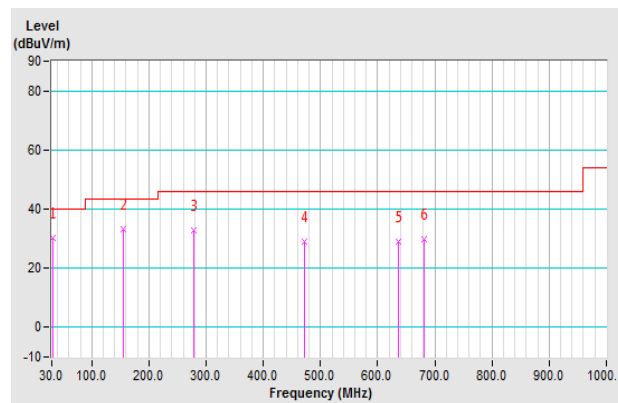


|                 |                      |                   |                 |
|-----------------|----------------------|-------------------|-----------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz         |                   |                 |
| Test Mode       | D                    |                   |                 |

| Antenna Polarity & Test Distance: Vertical At 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                              | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                | 56.6100     | 29.50 QP                | 40.00          | -10.50      | 1.50 V             | 1                    | 38.50            | -9.00                    |
| 2                                                | 155.1300    | 28.20 QP                | 43.50          | -15.30      | 1.00 V             | 268                  | 36.80            | -8.60                    |
| 3                                                | 276.0400    | 26.70 QP                | 46.00          | -19.30      | 1.50 V             | 90                   | 34.80            | -8.10                    |
| 4                                                | 517.8600    | 29.70 QP                | 46.00          | -16.30      | 1.00 V             | 15                   | 30.60            | -0.90                    |
| 5                                                | 737.1900    | 30.30 QP                | 46.00          | -15.70      | 1.99 V             | 12                   | 27.50            | 2.80                     |
| 6                                                | 784.9900    | 29.60 QP                | 46.00          | -16.40      | 1.99 V             | 12                   | 26.50            | 3.10                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

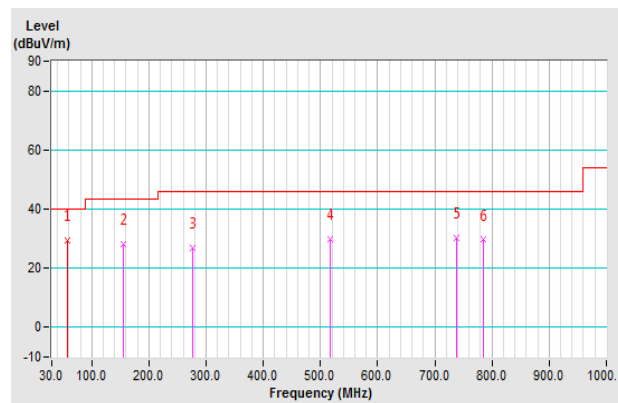


### Standby Mode

|                 |                      |                   |                 |
|-----------------|----------------------|-------------------|-----------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz         |                   |                 |
| Test Mode       | E                    |                   |                 |

| Antenna Polarity & Test Distance: Horizontal At 3m |             |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 30.0000     | 29.00 QP                | 40.00          | -11.00      | 2.00 H             | 275                  | 39.40            | -10.40                   |
| 2                                                  | 79.2100     | 21.90 QP                | 40.00          | -18.10      | 1.51 H             | 88                   | 34.90            | -13.00                   |
| 3                                                  | 155.1300    | 31.70 QP                | 43.50          | -11.80      | 2.00 H             | 133                  | 40.30            | -8.60                    |
| 4                                                  | 291.5100    | 27.90 QP                | 46.00          | -18.10      | 1.00 H             | 149                  | 35.60            | -7.70                    |
| 5                                                  | 529.1100    | 36.90 QP                | 46.00          | -9.10       | 1.51 H             | 175                  | 37.70            | -0.80                    |
| 6                                                  | 730.1600    | 32.20 QP                | 46.00          | -13.80      | 1.51 H             | 256                  | 29.70            | 2.50                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

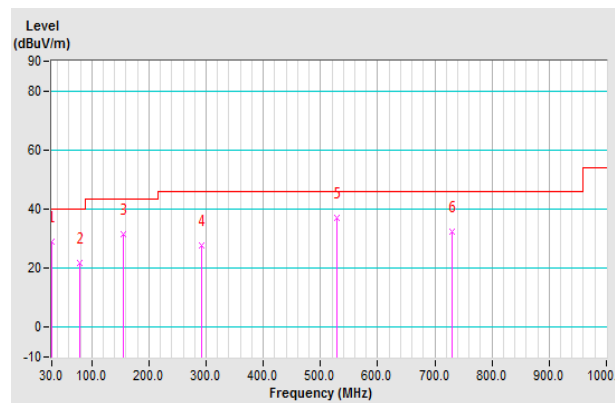


|                 |                      |                   |                 |
|-----------------|----------------------|-------------------|-----------------|
| Channel         | TX Channel 1 + 2 + 3 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz         |                   |                 |
| Test Mode       | E                    |                   |                 |

| Antenna Polarity & Test Distance: Vertical At 3m |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                              | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                | 31.4100     | 29.50 QP                | 40.00          | -10.50      | 1.00 V             | 94                   | 40.20            | -10.70                   |
| 2                                                | 52.5000     | 31.50 QP                | 40.00          | -8.50       | 1.00 V             | 15                   | 40.30            | -8.80                    |
| 3                                                | 156.5300    | 24.60 QP                | 43.50          | -18.90      | 1.00 V             | 259                  | 33.20            | -8.60                    |
| 4                                                | 285.8800    | 23.20 QP                | 46.00          | -22.80      | 1.49 V             | 1                    | 31.10            | -7.90                    |
| 5                                                | 535.0500    | 37.20 QP                | 46.00          | -8.80       | 1.00 V             | 2                    | 38.00            | -0.80                    |
| 6                                                | 747.0300    | 32.70 QP                | 46.00          | -13.30      | 1.99 V             | 306                  | 29.90            | 2.80                     |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

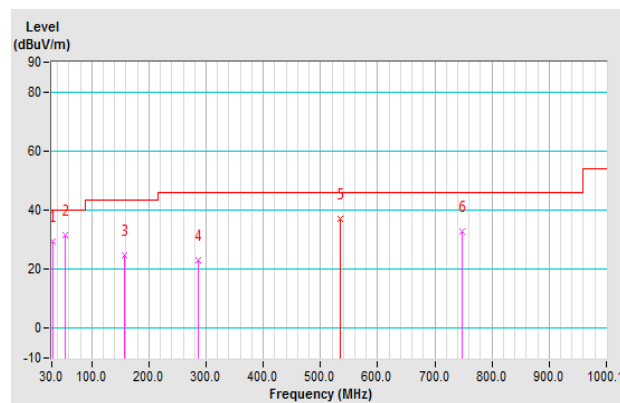



## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) |         |
|-----------------|------------------------|---------|
|                 | Quasi-peak             | Average |
| 0.15 - 0.5      | 66 - 56                | 56 - 46 |
| 0.50 - 5.0      | 56                     | 46      |
| 5.0 - 30.0      | 60                     | 50      |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

| Description & Manufacturer              | Model No.                | Serial No.     | Cal. Date     | Cal. Due      |
|-----------------------------------------|--------------------------|----------------|---------------|---------------|
| Test Receiver<br>ROHDE & SCHWARZ        | ESCI                     | 100613         | Dec. 11, 2019 | Dec. 10, 2020 |
| RF signal cable<br>Woken                | 5D-FB                    | Cable-cond1-01 | Sep. 05, 2019 | Sep. 04, 2020 |
| LISN<br>ROHDE & SCHWARZ<br>(EUT)        | ENV216                   | 101826         | Feb. 21, 2019 | Feb. 20, 2020 |
|                                         |                          |                | Feb. 20, 2020 | Feb. 19, 2021 |
| LISN<br>ROHDE & SCHWARZ<br>(Peripheral) | ESH3-Z5                  | 100311         | Aug. 22, 2019 | Aug. 21, 2020 |
| Software<br>ADT                         | BV ADT_Cond_<br>V7.3.7.4 | NA             | NA            | NA            |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-12040.

### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### 4.2.4 Deviation from Test Standard

No deviation.

### 4.2.5 Test Setup

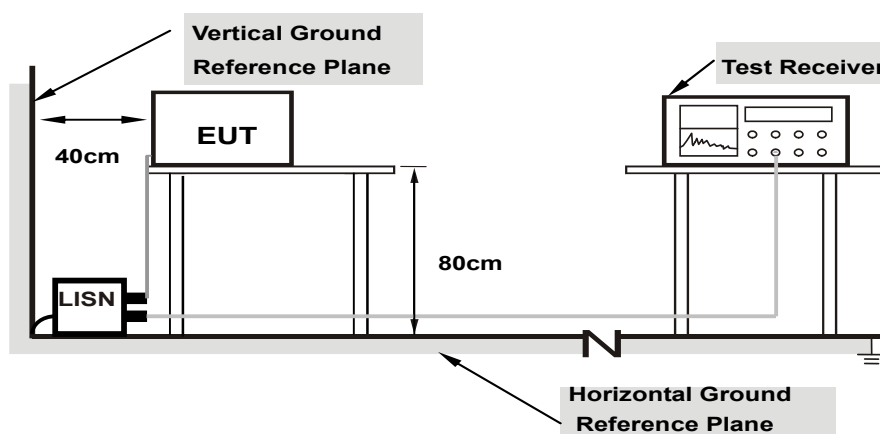

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

## 4.2.7 Test Results


### Charging Mode

|           |          |                   |                                   |
|-----------|----------|-------------------|-----------------------------------|
| Phase     | Line (L) | Detector Function | Quasi-Peak (QP) /<br>Average (AV) |
| Test Mode | A        |                   |                                   |

| No       | Freq.          | Corr.<br>Factor | Reading Value |              | Emission Level |              | Limit        |              | Margin        |              |
|----------|----------------|-----------------|---------------|--------------|----------------|--------------|--------------|--------------|---------------|--------------|
|          | [MHz]          |                 | [dB (uV)]     |              | [dB (uV)]      |              | [dB (uV)]    |              | (dB)          |              |
|          |                | (dB)            | Q.P.          | AV.          | Q.P.           | AV.          | Q.P.         | AV.          | Q.P.          | AV.          |
| 1        | 0.15391        | 10.15           | 37.79         | 24.40        | 47.94          | 34.55        | 65.79        | 55.79        | -17.85        | -21.24       |
| <b>2</b> | <b>0.43543</b> | <b>10.18</b>    | <b>30.77</b>  | <b>27.49</b> | <b>40.95</b>   | <b>37.67</b> | <b>57.15</b> | <b>47.15</b> | <b>-16.20</b> | <b>-9.48</b> |
| 3        | 0.79885        | 10.24           | 22.26         | 14.12        | 32.50          | 24.36        | 56.00        | 46.00        | -23.50        | -21.64       |
| 4        | 4.39626        | 10.48           | 15.43         | 6.01         | 25.91          | 16.49        | 56.00        | 46.00        | -30.09        | -29.51       |
| 5        | 11.15274       | 10.57           | 18.17         | 13.72        | 28.74          | 24.29        | 60.00        | 50.00        | -31.26        | -25.71       |
| 6        | 29.77216       | 10.88           | 17.32         | 14.91        | 28.20          | 25.79        | 60.00        | 50.00        | -31.80        | -24.21       |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

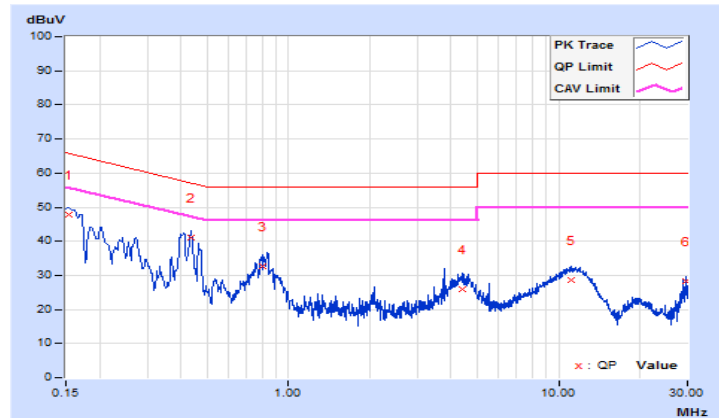


|           |             |                   |                                |
|-----------|-------------|-------------------|--------------------------------|
| Phase     | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | A           |                   |                                |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         |                            |       |                             |       |                    |       |                |        |
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
| 1  | 0.15782        | 10.13                   | 37.49                      | 24.56 | 47.62                       | 34.69 | 65.58              | 55.58 | -17.96         | -20.89 |
| 2  | 0.43924        | 10.18                   | 31.06                      | 26.38 | 41.24                       | 36.56 | 57.08              | 47.08 | -15.84         | -10.52 |
| 3  | 0.83425        | 10.23                   | 21.70                      | 14.06 | 31.93                       | 24.29 | 56.00              | 46.00 | -24.07         | -21.71 |
| 4  | 4.30242        | 10.46                   | 15.18                      | 6.73  | 25.64                       | 17.19 | 56.00              | 46.00 | -30.36         | -28.81 |
| 5  | 13.42445       | 10.63                   | 14.28                      | 9.80  | 24.91                       | 20.43 | 60.00              | 50.00 | -35.09         | -29.57 |
| 6  | 29.77216       | 10.91                   | 16.94                      | 14.58 | 27.85                       | 25.49 | 60.00              | 50.00 | -32.15         | -24.51 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

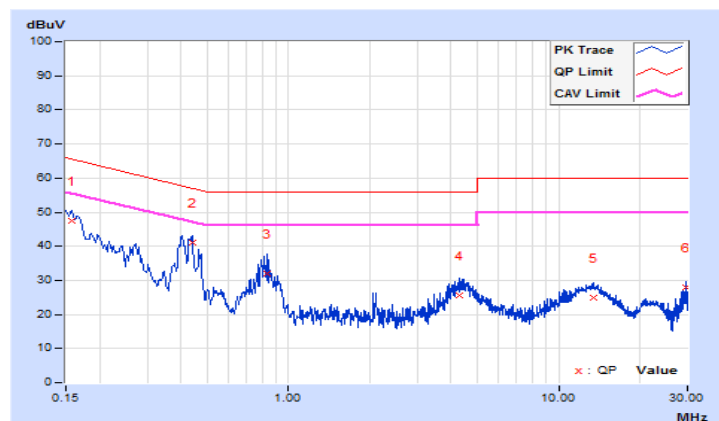


|           |          |                   |                                   |
|-----------|----------|-------------------|-----------------------------------|
| Phase     | Line (L) | Detector Function | Quasi-Peak (QP) /<br>Average (AV) |
| Test Mode | B        |                   |                                   |

| No | Freq.    | Corr.<br>Factor | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|----------|-----------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    | [MHz]    |                 | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    |          | (dB)            | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.15000  | 10.15           | 34.86         | 22.37 | 45.01          | 32.52 | 66.00     | 56.00 | -20.99 | -23.48 |
| 2  | 0.43579  | 10.18           | 33.62         | 27.14 | 43.80          | 37.32 | 57.14     | 47.14 | -13.34 | -9.82  |
| 3  | 0.83425  | 10.24           | 24.81         | 15.69 | 35.05          | 25.93 | 56.00     | 46.00 | -20.95 | -20.07 |
| 4  | 2.06263  | 10.36           | 18.85         | 17.71 | 29.21          | 28.07 | 56.00     | 46.00 | -26.79 | -17.93 |
| 5  | 4.42363  | 10.48           | 20.45         | 18.66 | 30.93          | 29.14 | 56.00     | 46.00 | -25.07 | -16.86 |
| 6  | 29.34597 | 10.87           | 17.56         | 14.25 | 28.43          | 25.12 | 60.00     | 50.00 | -31.57 | -24.88 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

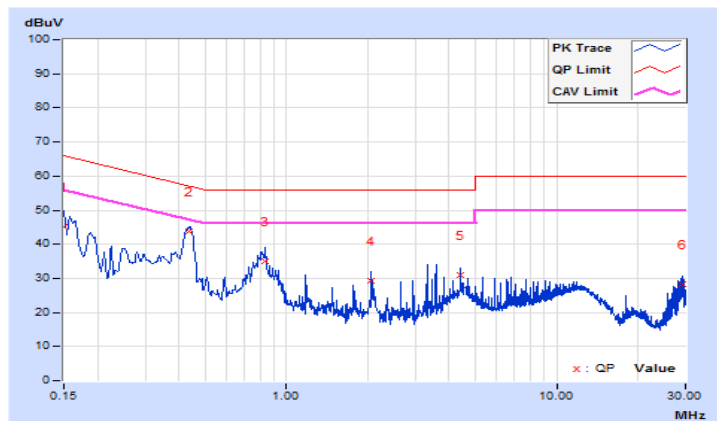


|           |             |                   |                                |
|-----------|-------------|-------------------|--------------------------------|
| Phase     | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B           |                   |                                |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         |                            |       |                             |       |                    |       |                |        |
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
| 1  | 0.16564        | 10.13                   | 32.99                      | 19.35 | 43.12                       | 29.48 | 65.18              | 55.18 | -22.06         | -25.70 |
| 2  | 0.42782        | 10.17                   | 33.37                      | 27.09 | 43.54                       | 37.26 | 57.29              | 47.29 | -13.75         | -10.03 |
| 3  | 0.78342        | 10.22                   | 22.54                      | 14.28 | 32.76                       | 24.50 | 56.00              | 46.00 | -23.24         | -21.50 |
| 4  | 2.06590        | 10.36                   | 19.21                      | 18.66 | 29.57                       | 29.02 | 56.00              | 46.00 | -26.43         | -16.98 |
| 5  | 4.42363        | 10.46                   | 20.55                      | 18.56 | 31.01                       | 29.02 | 56.00              | 46.00 | -24.99         | -16.98 |
| 6  | 9.32677        | 10.52                   | 12.71                      | 3.16  | 23.23                       | 13.68 | 60.00              | 50.00 | -36.77         | -36.32 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

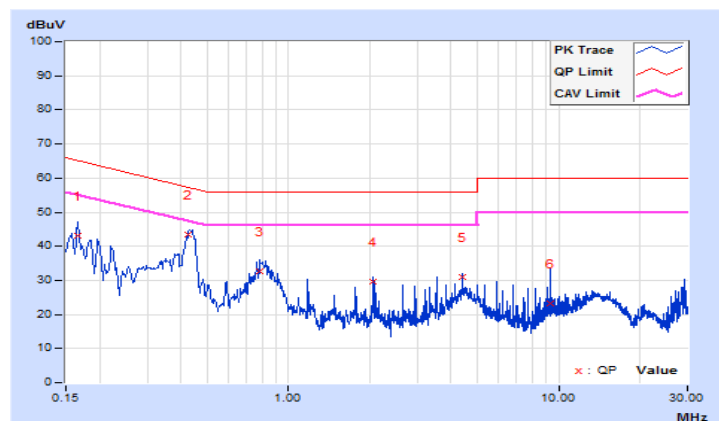


|           |          |                   |                                   |
|-----------|----------|-------------------|-----------------------------------|
| Phase     | Line (L) | Detector Function | Quasi-Peak (QP) /<br>Average (AV) |
| Test Mode | C        |                   |                                   |

| No | Freq.    | Corr.<br>Factor | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|----------|-----------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    | [MHz]    |                 | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    |          | (dB)            | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.15391  | 10.15           | 34.49         | 19.37 | 44.64          | 29.52 | 65.79     | 55.79 | -21.15 | -26.27 |
| 2  | 0.19692  | 10.16           | 26.42         | 13.27 | 36.58          | 23.43 | 63.74     | 53.74 | -27.16 | -30.31 |
| 3  | 0.43152  | 10.18           | 32.44         | 23.78 | 42.62          | 33.96 | 57.22     | 47.22 | -14.60 | -13.26 |
| 4  | 0.83034  | 10.24           | 24.93         | 15.42 | 35.17          | 25.66 | 56.00     | 46.00 | -20.83 | -20.34 |
| 5  | 4.32588  | 10.47           | 10.35         | 2.20  | 20.82          | 12.67 | 56.00     | 46.00 | -35.18 | -33.33 |
| 6  | 12.43522 | 10.58           | 12.47         | 6.59  | 23.05          | 17.17 | 60.00     | 50.00 | -36.95 | -32.83 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

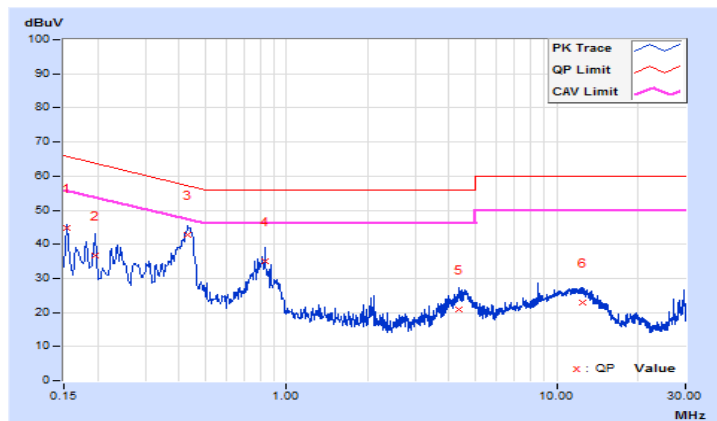


|           |             |                   |                                |
|-----------|-------------|-------------------|--------------------------------|
| Phase     | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | C           |                   |                                |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         |                            |       |                             |       |                    |       |                |        |
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
| 1  | 0.16955        | 10.13                   | 30.29                      | 15.78 | 40.42                       | 25.91 | 64.98              | 54.98 | -24.56         | -29.07 |
| 2  | 0.43543        | 10.17                   | 33.74                      | 27.42 | 43.91                       | 37.59 | 57.15              | 47.15 | -13.24         | -9.56  |
| 3  | 0.81470        | 10.23                   | 25.32                      | 15.30 | 35.55                       | 25.53 | 56.00              | 46.00 | -20.45         | -20.47 |
| 4  | 1.85476        | 10.34                   | 3.38                       | 0.73  | 13.72                       | 11.07 | 56.00              | 46.00 | -42.28         | -34.93 |
| 5  | 3.32492        | 10.43                   | 11.59                      | 1.61  | 22.02                       | 12.04 | 56.00              | 46.00 | -33.98         | -33.96 |
| 6  | 13.97576       | 10.65                   | 11.22                      | 6.60  | 21.87                       | 17.25 | 60.00              | 50.00 | -38.13         | -32.75 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

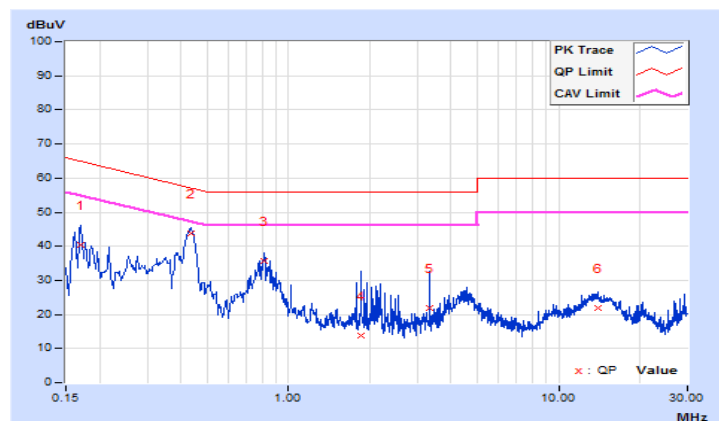




|           |          |                   |                                   |
|-----------|----------|-------------------|-----------------------------------|
| Phase     | Line (L) | Detector Function | Quasi-Peak (QP) /<br>Average (AV) |
| Test Mode | D        |                   |                                   |

| No | Freq.    | Corr.<br>Factor | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|----------|-----------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    | [MHz]    |                 | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    |          | (dB)            | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.15000  | 10.15           | 40.11         | 27.80 | 50.26          | 37.95 | 66.00     | 56.00 | -15.74 | -18.05 |
| 2  | 0.38851  | 10.17           | 31.19         | 27.45 | 41.36          | 37.62 | 58.10     | 48.10 | -16.74 | -10.48 |
| 3  | 0.45889  | 10.18           | 29.07         | 17.09 | 39.25          | 27.27 | 56.71     | 46.71 | -17.46 | -19.44 |
| 4  | 0.81861  | 10.24           | 23.22         | 15.11 | 33.46          | 25.35 | 56.00     | 46.00 | -22.54 | -20.65 |
| 5  | 4.41972  | 10.48           | 19.69         | 16.11 | 30.17          | 26.59 | 56.00     | 46.00 | -25.83 | -19.41 |
| 6  | 11.37470 | 10.57           | 19.63         | 14.98 | 30.20          | 25.55 | 60.00     | 50.00 | -29.80 | -24.45 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

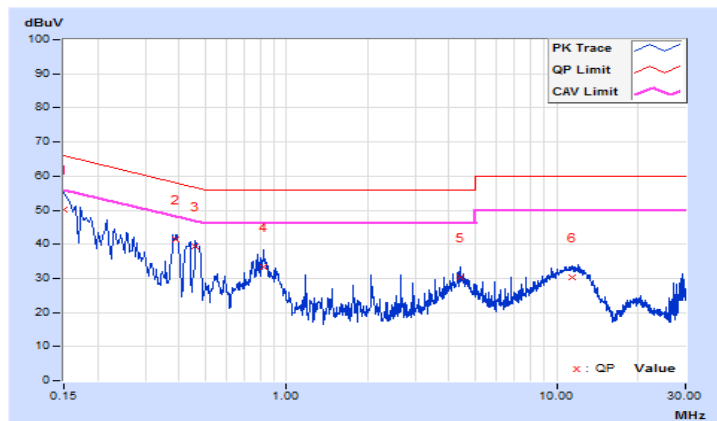


|           |             |                   |                                |
|-----------|-------------|-------------------|--------------------------------|
| Phase     | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | D           |                   |                                |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         |                            |       |                             |       |                    |       |                |        |
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
| 1  | 0.15760        | 10.13                   | 40.93                      | 27.64 | 51.06                       | 37.77 | 65.59              | 55.59 | -14.53         | -17.82 |
| 2  | 0.27120        | 10.14                   | 28.79                      | 20.99 | 38.93                       | 31.13 | 61.08              | 51.08 | -22.15         | -19.95 |
| 3  | 0.39633        | 10.17                   | 30.53                      | 22.21 | 40.70                       | 32.38 | 57.93              | 47.93 | -17.23         | -15.55 |
| 4  | 0.81079        | 10.22                   | 24.00                      | 16.19 | 34.22                       | 26.41 | 56.00              | 46.00 | -21.78         | -19.59 |
| 5  | 4.42754        | 10.46                   | 19.41                      | 15.53 | 29.87                       | 25.99 | 56.00              | 46.00 | -26.13         | -20.01 |
| 6  | 13.23677       | 10.63                   | 16.16                      | 11.41 | 26.79                       | 22.04 | 60.00              | 50.00 | -33.21         | -27.96 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

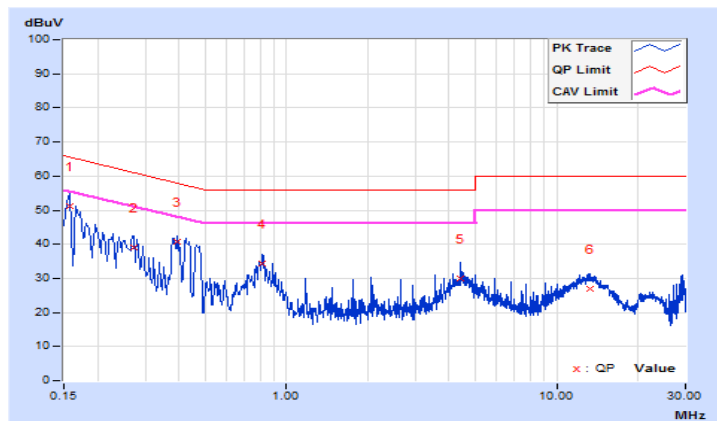


### Standby Mode

| Phase     | Line (L) | Detector Function | Quasi-Peak (QP) /<br>Average (AV) |
|-----------|----------|-------------------|-----------------------------------|
| Test Mode | E        |                   |                                   |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    |                |                         | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    |                |                         | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.15400        | 10.15                   | 32.34         | 12.55 | 42.49          | 22.70 | 65.78     | 55.78 | -23.29 | -33.08 |
| 2  | 0.17800        | 10.16                   | 30.31         | 9.50  | 40.47          | 19.66 | 64.58     | 54.58 | -24.11 | -34.92 |
| 3  | 0.42577        | 10.17                   | 23.35         | 10.72 | 33.52          | 20.89 | 57.33     | 47.33 | -23.81 | -26.44 |
| 4  | 0.82200        | 10.24                   | 21.02         | 12.32 | 31.26          | 22.56 | 56.00     | 46.00 | -24.74 | -23.44 |
| 5  | 4.38200        | 10.48                   | 5.16          | 2.77  | 15.64          | 13.25 | 56.00     | 46.00 | -40.36 | -32.75 |
| 6  | 9.58200        | 10.54                   | 7.54          | 1.70  | 18.08          | 12.24 | 60.00     | 50.00 | -41.92 | -37.76 |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

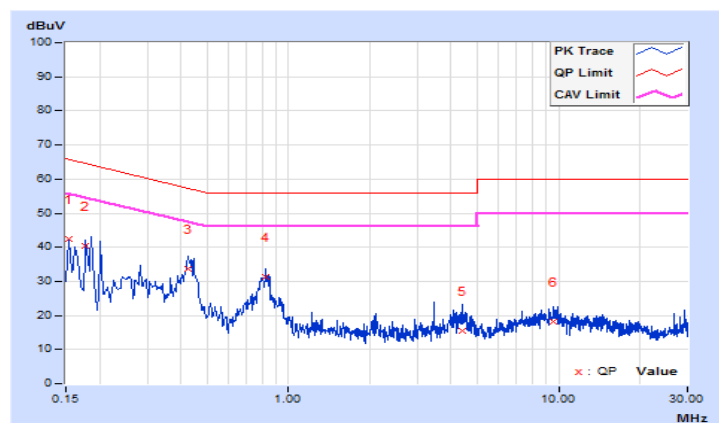


|           |             |                   |                                |
|-----------|-------------|-------------------|--------------------------------|
| Phase     | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | E           |                   |                                |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         |                            |       |                             |       |                    |       |                |        |
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
| 1  | 0.17400        | 10.13                   | 26.89                      | 8.51  | 37.02                       | 18.64 | 64.77              | 54.77 | -27.75         | -36.13 |
| 2  | 0.24200        | 10.14                   | 22.66                      | 8.10  | 32.80                       | 18.24 | 62.03              | 52.03 | -29.23         | -33.79 |
| 3  | 0.43800        | 10.18                   | 30.34                      | 17.22 | 40.52                       | 27.40 | 57.10              | 47.10 | -16.58         | -19.70 |
| 4  | 0.82200        | 10.23                   | 24.04                      | 15.44 | 34.27                       | 25.67 | 56.00              | 46.00 | -21.73         | -20.33 |
| 5  | 4.46600        | 10.47                   | 9.64                       | 0.48  | 20.11                       | 10.95 | 56.00              | 46.00 | -35.89         | -35.05 |
| 6  | 13.41800       | 10.63                   | 11.45                      | 5.43  | 22.08                       | 16.06 | 60.00              | 50.00 | -37.92         | -33.94 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

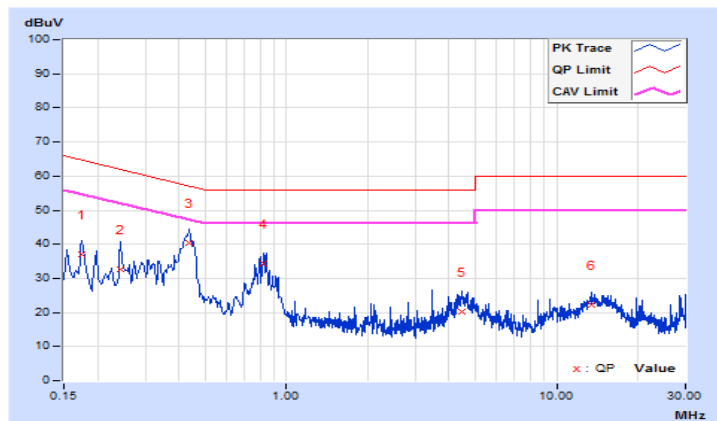

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---