

RF Exposure Report

Report No.: MFBCBS-WTW-P23090428

FCC ID: K7SWIZ021

Test Model: WIZ021

Received Date: Sep. 08, 2023

Test Date: Sep. 22 ~ Dec. 27, 2023

Issued Date: Jan. 02, 2024

Applicant: Belkin International, Inc.

Address: 555 S. Aviation Blvd., Suite 180, El Segundo, CA 90245, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 General Information	5
2.1 General Description of EUT	5
2.2 Description of Test Modes	7
3 RF Exposure	8
3.1 Description of Support Units	8
3.1.1 Configuration of System under Test	9
3.2 Test Setup	11
3.3 Test Instruments	11
3.4 Limits for Maximum Permissible Exposure (MPE).....	12
3.5 Test Point Description	13
4. Calculation Result of Maximum Conducted Power	14
5. Photographs of the Test Configuration	69

Release Control Record

Issue No.	Description	Date Issued
MFBCBS-WTW-P23090428	Original release	Jan. 02, 2024

1 Certificate of Conformity

Product: BoostCharge Pro 2-in-1 Magnetic Charging Pad
Brand: belkin
Test Model: WIZ021
Sample Status: Engineering sample
Applicant: Belkin International, Inc.
Test Date: Sep. 22 ~ Oct. 16, 2023
FCC Rule Part: FCC Part 1 (Section 1.1307(b), Section 1.1310)
FCC Part 2 (Section 2.1091)
Standards: KDB 680106 D01 Wireless Power Transfer v04

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Jan. 02, 2024
Celine Chou / Senior Specialist

Approved by : Jeremy Lin , **Date:** Jan. 02, 2024
Jeremy Lin / Project Engineer

2 General Information

2.1 General Description of EUT

Product	BoostCharge Pro 2-in-1 Magnetic Charging Pad
Brand	belkin
Test Model	WIZ021
Sample Status	Engineering sample
Power Supply Rating	9Vdc, 3A
Modulation Type	FSK
Operating Frequency	127.7kHz for iPhone (8-11 series) 111-148kHz for AirPods 360.0kHz for iPhone (12 series up)
Antenna Type	Coil antenna
Field Strength	127.7kHz: -25.8dBuV/m (PK) (300m) -32.5dBuV/m (AV) (300m) 121.6kHz: -28.8dBuV/m (PK) (300m) -32.5dBuV/m (AV) (300m) 360.0kHz: -27.7dBuV/m (PK) (300m) -33.0dBuV/m (AV) (300m)
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below
Maximum Power Output for Qi2 charging coil	15W
Maximum Power Output for a11a Coil	5W
Dimension of Qi2 Charging Coil	12.13cm ²
Dimension of Qi A11a Charging Coil	15.20cm ²

Note:

1. The EUT contains following accessory devices.

Item	Brand	Model	Description
Adapter	belkin	A843-200150C-US1	I/P: 100-240Vac, 50/60Hz, 0.8A O/P: 5.0Vdc, 3.0A; 9.0Vdc, 3.0A; 12.0Vdc, 2.5A; 15.0Vdc, 2.0A, 20Vdc, 1.5A Total Output Power 30.0W Max
BoostCharge Portable USB-C Apple Watch Charger (Option)	belkin	WIZ022	-
Type C to Type C USB Cable	belkin	CAB003bt2MBK (black) / CAB003bt2MWH (white)	1.5m shielding cable

2. The EUT has two exterior colors: black and white.
3. This wireless charger device may be used with an USB-C accessory which enables wirelessly charging an Apple Watch in conjunction with the EUT [BoostCharge Portable USB-C Apple Watch Charger (Brand: belkin, Model: WIZ022)]. The USB-C accessory operates on frequencies 326.5kHz or 1.7778MHz and its results have been included in this report for reference only.
4. Due to radiated measurements are made and the antenna gain is already accounted for this device, so provide an antenna datasheet and/or antenna measurement report is not required. The antenna dimensions and pictures (include antenna wire length if have) are stated in EUT photo exhibit.

2.2 Description of Test Modes

Test Mode	Tested Frequency
A	Charging Mode (EUT with RX Load) - 360.0kHz
B	Charging Mode (EUT with AirPods Pro Case) – 121.6kHz
C	Charging Mode (EUT with iPhone 11) – 127.7kHz
D	Charging Mode (EUT with iPhone 11, AirPods Pro Case and Apple Watch 4) - 127.7kHz + 121.6kHz + 326.5kHz
E	Charging Mode (EUT with iPhone 11, AirPods Pro Case and Apple Watch 7) - 127.7kHz + 121.6kHz + 1.7778MHz
F	Charging Mode (EUT with RX Load and AirPods Pro Case) - 121.6kHz + 360.0kHz
G	Charging Mode (EUT with iPhone 13) – 360.0kHz
H	Charging Mode (EUT with Apple Watch 4) – 326.5kHz
I	Charging Mode (EUT with Apple Watch 7) – 1.7778MHz
J	Standby Mode

3 RF Exposure

3.1 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Adapter	belkin	A843-200150C-US1	NA	NA	Accessory of EUT
B.	RX Load	convenientpower	T70-B	NA	NA	360kHz Provided by manufacturer
C.	AirPods Pro Case	APPLE	A2566	NA	NA	121.6kHz Provided by manufacturer
D.	iPhone 11	APPLE	A2215	NA	BCG-E3309A	127.7kHz Provided by manufacturer
E.	iPhone 13	APPLE	A2633	NA	BCG-E4031A	360kHz Provided by manufacturer
F.	Apple Watch	APPLE	A2007	NA	BCG-A2007	326.5kHz Provided by manufacturer
G.	Apple Watch	APPLE	A2476	NA	BCG-A2476	1.7778MHz Provided by manufacturer

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Type C to Type C USB Cable	1	1.5	Y	0	Accessory of EUT

3.1.1 Configuration of System under Test


Charging Mode:
Test Mode A

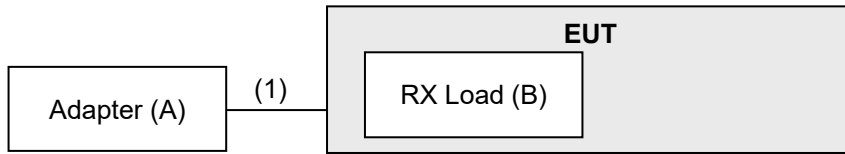


Test Mode B




Test Mode C

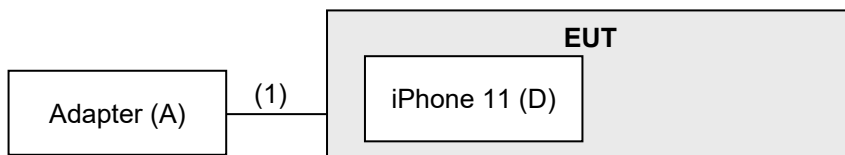

Test Mode D

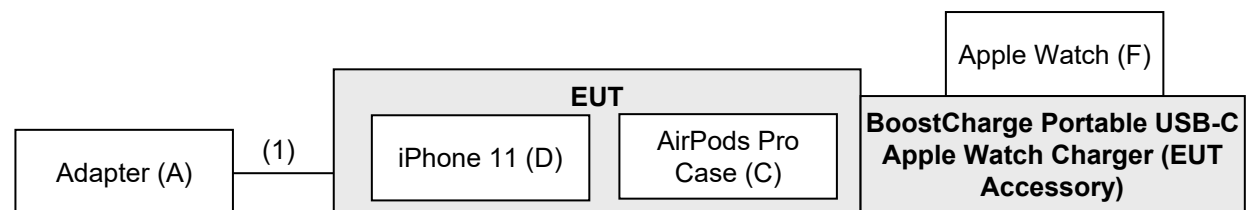


Test Mode E

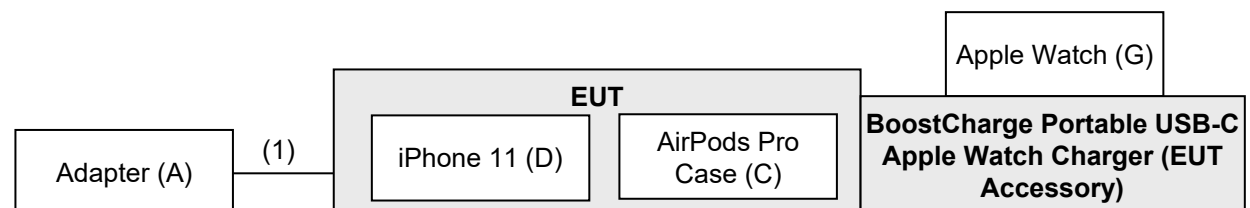


Test Mode F




Test Mode G

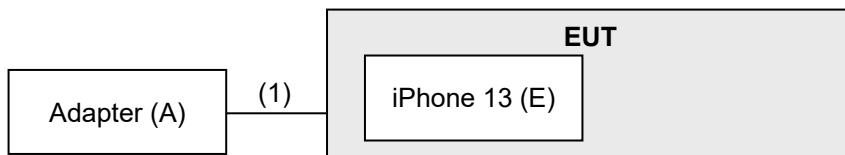

Test Mode H

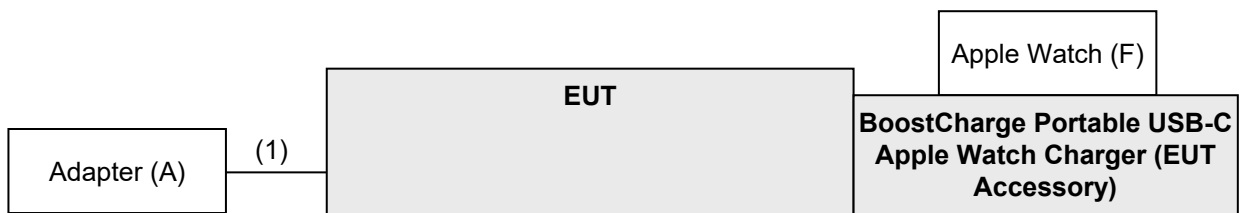

Test Mode I

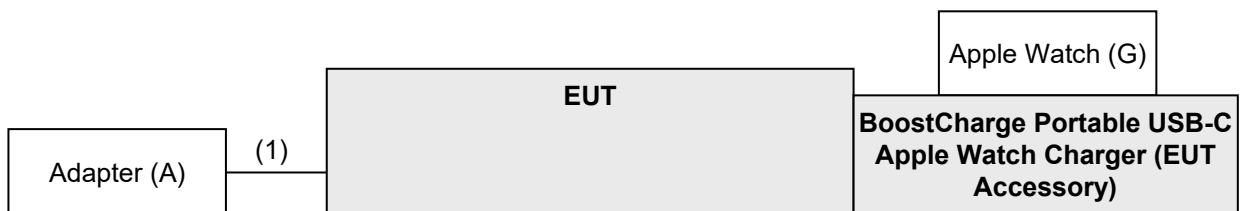


Standby Mode:

Test Mode J



3.2 Test Setup

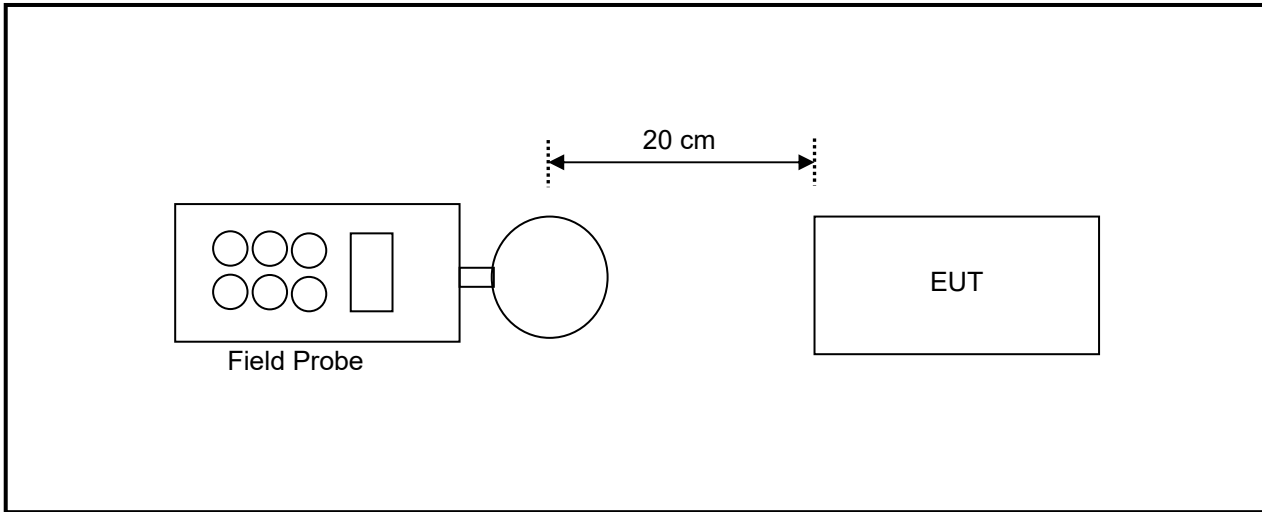

Note: Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device.

3.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
EM Field Meter	Wavecontrol	SMP2 Dual	-	May 15, 2023	May 14, 2024
Magnetic Probe	Wavecontrol	WPH60	300kHz – 60MHz	May 15, 2023	May 14, 2024
EM Field Probe	Wavecontrol	WP400	1Hz – 400kHz	Mar. 02, 2023	Mar. 01, 2024
E-Field Probe	Wavecontrol	WPF3	100kHz – 3GHz	May 16, 2023	May 15, 2024

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa RF Chamber

3.4 Limits for Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.


KDB 680106 D01 Wireless Power Transfer v04, section 3.2 as reproduced below:

3.2 Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz

The RF exposure limits, as set forth in § 1.1310, do not cover the frequency range below 100 kHz for Specific Absorption Rate (SAR) and below 300 kHz for Maximum Permitted Exposure (MPE). In addition, present limitations of RF exposure evaluation systems prevent an accurate evaluation of SAR below 4 MHz. For these reasons, a specific MPE-based RF Exposure compliance procedure for devices operating in the aforementioned low-frequency ranges has been set in place. Accordingly, for § 2.1091-Mobile devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively.

3.5 Test Point Description

The aggregate Fields strengths at 20 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

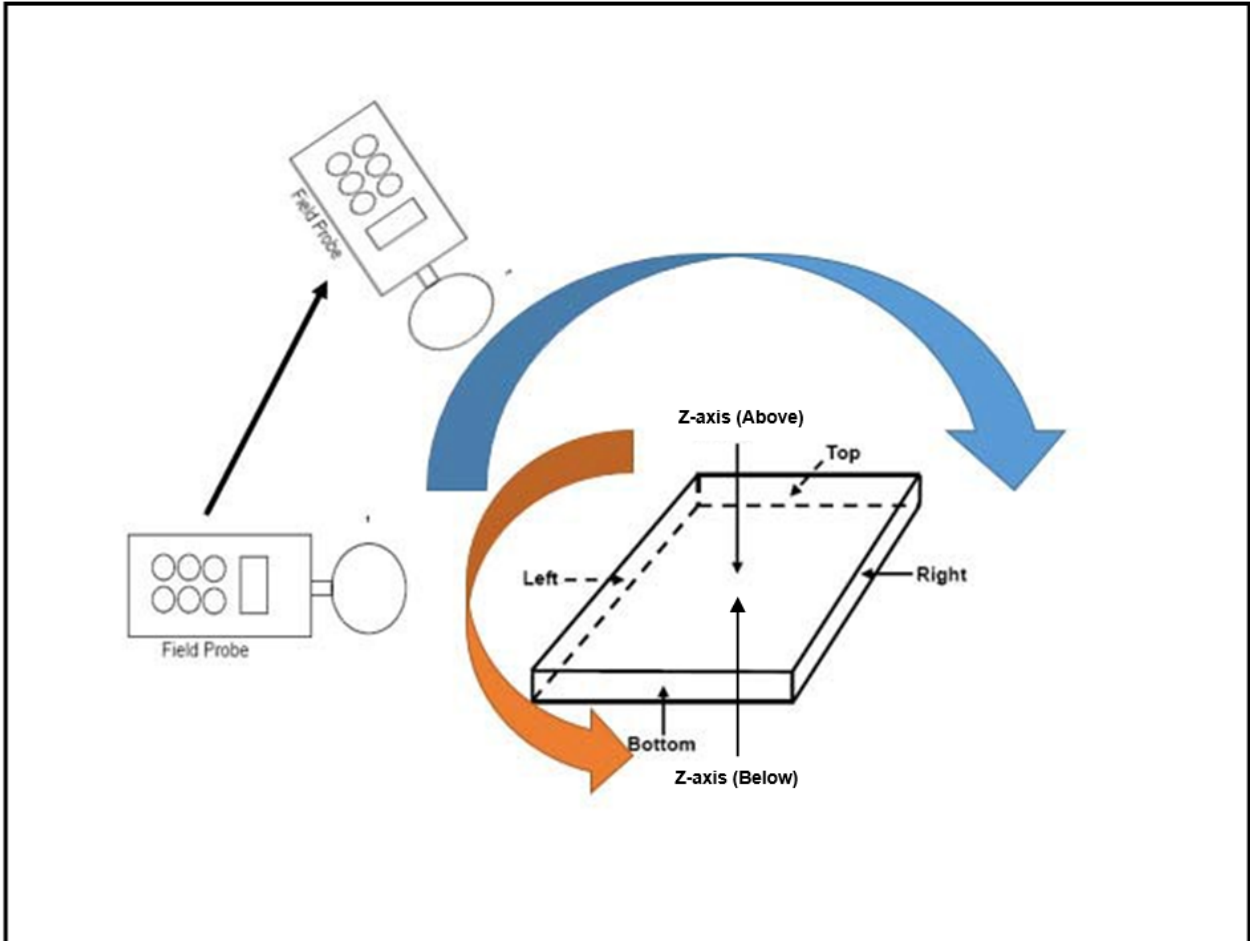

4. Calculation Result of Maximum Conducted Power

Test Mode A

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.2200	0.3400	0.3200	0.9100	0.3200	0.3500
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.7800	-613.6600	-613.6800	-613.0900	-613.6800	-613.6500
360.0	50 % Limit (V/m)	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.7800	-306.6600	-306.6800	-306.0900	-306.6800	-306.6500

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0300	0.0400	0.0500	0.0300	0.0300	0.0400
360.0	Max H-field (A/m)	0.0240	0.0320	0.0400	0.0240	0.0240	0.0320
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.6060	-1.5980	-1.5900	-1.6060	-1.6060	-1.5980
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7910	-0.7830	-0.7750	-0.7910	-0.7910	-0.7830

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.1400	0.2500	0.2400	0.8400	0.3500	0.3700
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.8600	-613.7500	-613.7600	-613.1600	-613.6500	-613.6300
360.0	50 % Limit (V/m)	307	307	307	307	307.0000	307
360.0	50 % Margin (V/m)	-306.8600	-306.7500	-306.7600	-306.1600	-306.6500	-306.6300

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0400	0.0600	0.0700	0.0500	0.0500	0.0600
360.0	Max H-field (A/m)	0.0320	0.0480	0.0560	0.0400	0.0400	0.0480
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5980	-1.5820	-1.5740	-1.5900	-1.5900	-1.5820
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7830	-0.7670	-0.7590	-0.7750	-0.7750	-0.7670

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.2700	0.3600	0.3800	1.0100	0.2900	0.3900
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.7300	-613.6400	-613.6200	-612.9900	-613.7100	-613.6100
360.0	50 % Limit (V/m)	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.7300	-306.6400	-306.6200	-305.9900	-306.7100	-306.6100

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0600	0.0700	0.0700	0.0600	0.0500	0.0700
360.0	Max H-field (A/m)	0.0480	0.0560	0.0560	0.0480	0.0400	0.0560
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5820	-1.5740	-1.5740	-1.5820	-1.5900	-1.5740
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7670	-0.7590	-0.7590	-0.7670	-0.7750	-0.7590

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode B

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.1900	0.2300	0.2200	0.5900	0.4100	0.4200
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.8100	-613.7700	-613.7800	-613.4100	-613.5900	-613.5800
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.8100	-306.7700	-306.7800	-306.4100	-306.5900	-306.5800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0500	0.1000	0.1000	0.0700	0.1300	0.1000
121.6	Max H-field (A/m)	0.0400	0.0800	0.0800	0.0560	0.1040	0.0800
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5900	-1.5500	-1.5500	-1.5740	-1.5260	-1.5500
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7750	-0.7350	-0.7350	-0.7590	-0.7110	-0.7350

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.2000	0.2200	0.2300	0.6000	0.4300	0.4400
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.8000	-613.7800	-613.7700	-613.4000	-613.5700	-613.5600
121.6	50 % Limit (V/m)	307	307	307	307	307.0000	307
121.6	50 % Margin (V/m)	-306.8000	-306.7800	-306.7700	-306.4000	-306.5700	-306.5600

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0500	0.1000	0.1000	0.0700	0.1400	0.1100
121.6	Max H-field (A/m)	0.0400	0.0800	0.0800	0.0560	0.1120	0.0880
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5900	-1.5500	-1.5500	-1.5740	-1.5180	-1.5420
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7750	-0.7350	-0.7350	-0.7590	-0.7030	-0.7270

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.2300	0.2500	0.2600	0.6400	0.4700	0.4600
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.7700	-613.7500	-613.7400	-613.3600	-613.5300	-613.5400
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.7700	-306.7500	-306.7400	-306.3600	-306.5300	-306.5400

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0600	0.1100	0.1100	0.0900	0.1600	0.1300
121.6	Max H-field (A/m)	0.0480	0.0880	0.0880	0.0720	0.1280	0.1040
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5820	-1.5420	-1.5420	-1.5580	-1.5020	-1.5260
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7670	-0.7270	-0.7270	-0.7430	-0.6870	-0.7110

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode C

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.4100	0.2900	0.2300	0.4800	0.4200	0.4300
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5900	-613.7100	-613.7700	-613.5200	-613.5800	-613.5700
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5900	-306.7100	-306.7700	-306.5200	-306.5800	-306.5700

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0430	0.0760	0.0630	0.0750	0.1200	0.1700
127.7	Max H-field (A/m)	0.0344	0.0608	0.0504	0.0600	0.0960	0.1360
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5956	-1.5692	-1.5796	-1.5700	-1.5340	-1.4940
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7806	-0.7542	-0.7646	-0.7550	-0.7190	-0.6790

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.3700	0.2400	0.3100	0.4200	0.3500	0.4100
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.6300	-613.7600	-613.6900	-613.5800	-613.6500	-613.5900
127.7	50 % Limit (V/m)	307	307	307	307	307.0000	307
127.7	50 % Margin (V/m)	-306.6300	-306.7600	-306.6900	-306.5800	-306.6500	-306.5900

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0600	0.0500	0.0600	0.1000	0.1100	0.1500
127.7	Max H-field (A/m)	0.0480	0.0400	0.0480	0.0800	0.0880	0.1200
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5820	-1.5900	-1.5820	-1.5500	-1.5420	-1.5100
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7670	-0.7750	-0.7670	-0.7350	-0.7270	-0.6950

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.3800	0.3200	0.2900	0.4500	0.3600	0.4200
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.6200	-613.6800	-613.7100	-613.5500	-613.6400	-613.5800
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.6200	-306.6800	-306.7100	-306.5500	-306.6400	-306.5800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0700	0.1000	0.0900	0.1300	0.1300	0.2300
127.7	Max H-field (A/m)	0.0560	0.0800	0.0720	0.1040	0.1040	0.1840
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5740	-1.5500	-1.5580	-1.5260	-1.5260	-1.4460
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7590	-0.7350	-0.7430	-0.7110	-0.7110	-0.6310

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode D

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.4200	0.3100	0.2800	0.5000	0.5300	0.5900
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5800	-613.6900	-613.7200	-613.5000	-613.4700	-613.4100
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5800	-306.6900	-306.7200	-306.5000	-306.4700	-306.4100

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0200	0.0500	0.0400	0.0500	0.1500	0.2900
127.7	Max H-field (A/m)	0.0160	0.0400	0.0320	0.0400	0.1200	0.2320
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.5900	-1.5980	-1.5900	-1.5100	-1.3980
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7750	-0.7830	-0.7750	-0.6950	-0.5830

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.1900	0.2500	0.2200	0.6100	0.4400	0.5900
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.8100	-613.7500	-613.7800	-613.3900	-613.5600	-613.4100
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.8100	-306.7500	-306.7800	-306.3900	-306.5600	-306.4100

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0400	0.0800	0.0800	0.0700	0.1000	0.2900
121.6	Max H-field (A/m)	0.0320	0.0640	0.0640	0.0560	0.0800	0.2320
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5980	-1.5660	-1.5660	-1.5740	-1.5500	-1.3980
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7830	-0.7510	-0.7510	-0.7590	-0.7350	-0.5830

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max E-field (V/m)	0.4500	0.1400	0.2500	0.2200	0.1300	0.2400
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5500	-613.8600	-613.7500	-613.7800	-613.8700	-613.7600
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5500	-306.8600	-306.7500	-306.7800	-306.8700	-306.7600

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max H-field (uT)	0.0700	0.0200	0.0200	0.0200	0.0200	0.0300
326.5	Max H-field (A/m)	0.0560	0.0160	0.0160	0.0160	0.0160	0.0240
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5740	-1.6140	-1.6140	-1.6140	-1.6140	-1.6060
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7590	-0.7990	-0.7990	-0.7990	-0.7990	-0.7910

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 326.5	Max E-field (V/m)	0.0017	0.0011	0.0012	0.0022	0.0018	0.0023
127.7 + 121.6 + 326.5	Limit	1	1	1	1	1	1
127.7 + 121.6 + 326.5	Margin	-0.9983	-0.9989	-0.9988	-0.9978	-0.9982	-0.9977

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](326.5kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 326.5	Max H-field (A/m)	0.0638	0.0736	0.0687	0.0687	0.1325	0.2994
127.7 + 121.6 + 326.5	Limit	1	1	1	1	1	1
127.7 + 121.6 + 326.5	Margin	-0.9362	-0.9264	-0.9313	-0.9313	-0.8675	-0.7006

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](326.5kHz)

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.6900	0.5800	0.5500	0.7400	0.6600	0.6200
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3100	-613.4200	-613.4500	-613.2600	-613.3400	-613.3800
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3100	-306.4200	-306.4500	-306.2600	-306.3400	-306.3800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0600	0.0900	0.0900	0.1000	0.2000	0.3100
127.7	Max H-field (A/m)	0.0480	0.0720	0.0720	0.0800	0.1600	0.2480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5820	-1.5580	-1.5580	-1.5500	-1.4700	-1.3820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7670	-0.7430	-0.7430	-0.7350	-0.6550	-0.5670

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.3100	0.3600	0.3400	0.7400	0.5700	0.6200
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.6900	-613.6400	-613.6600	-613.2600	-613.4300	-613.3800
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.6900	-306.6400	-306.6600	-306.2600	-306.4300	-306.3800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0700	0.1100	0.1200	0.1100	0.1600	0.3400
121.6	Max H-field (A/m)	0.0560	0.0880	0.0960	0.0880	0.1280	0.2720
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5740	-1.5420	-1.5340	-1.5420	-1.5020	-1.3580
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7590	-0.7270	-0.7190	-0.7270	-0.6870	-0.5430

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max E-field (V/m)	0.5600	0.2500	0.3600	0.3200	0.2300	0.2500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4400	-613.7500	-613.6400	-613.6800	-613.7700	-613.7500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4400	-306.7500	-306.6400	-306.6800	-306.7700	-306.7500

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max H-field (uT)	0.0800	0.0400	0.0300	0.0300	0.0200	0.0300
326.5	Max H-field (A/m)	0.0640	0.0320	0.0240	0.0240	0.0160	0.0240
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5980	-1.6060	-1.6060	-1.6140	-1.6060
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7830	-0.7910	-0.7910	-0.7990	-0.7910

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 326.5	Max E-field (V/m)	0.0025	0.0019	0.0020	0.0029	0.0024	0.0024
127.7 + 121.6 + 326.5	Limit	1	1	1	1	1	1
127.7 + 121.6 + 326.5	Margin	-0.9975	-0.9981	-0.9980	-0.9971	-0.9976	-0.9976

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](326.5kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 326.5	Max H-field (A/m)	0.1031	0.1178	0.1178	0.1178	0.1865	0.3337
127.7 + 121.6 + 326.5	Limit	1	1	1	1	1	1
127.7 + 121.6 + 326.5	Margin	-0.8969	-0.8822	-0.8822	-0.8822	-0.8135	-0.6663

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](326.5kHz)

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.7000	0.5900	0.5800	0.7700	0.6900	0.6500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3000	-613.4100	-613.4200	-613.2300	-613.3100	-613.3500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3000	-306.4100	-306.4200	-306.2300	-306.3100	-306.3500

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0800	0.1000	0.1300	0.1200	0.2100	0.3300
127.7	Max H-field (A/m)	0.0640	0.0800	0.1040	0.0960	0.1680	0.2640
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5660	-1.5500	-1.5260	-1.5340	-1.4620	-1.3660
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7510	-0.7350	-0.7110	-0.7190	-0.6470	-0.5510

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.3200	0.3800	0.3700	0.7900	0.6100	0.6600
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.6800	-613.6200	-613.6300	-613.2100	-613.3900	-613.3400
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.6800	-306.6200	-306.6300	-306.2100	-306.3900	-306.3400

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0800	0.1300	0.1300	0.1200	0.1900	0.3600
121.6	Max H-field (A/m)	0.0640	0.1040	0.1040	0.0960	0.1520	0.2880
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5660	-1.5260	-1.5260	-1.5340	-1.4780	-1.3420
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7510	-0.7110	-0.7110	-0.7190	-0.6630	-0.5270

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max E-field (V/m)	0.5800	0.2500	0.3600	0.3300	0.2400	0.2500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4200	-613.7500	-613.6400	-613.6700	-613.7600	-613.7500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4200	-306.7500	-306.6400	-306.6700	-306.7600	-306.7500

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max H-field (uT)	0.0900	0.0400	0.0300	0.0300	0.0300	0.0400
326.5	Max H-field (A/m)	0.0720	0.0320	0.0240	0.0240	0.0240	0.0320
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5580	-1.5980	-1.6060	-1.6060	-1.6060	-1.5980
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7430	-0.7830	-0.7910	-0.7910	-0.7910	-0.7830

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 326.5	Max E-field (V/m)	0.0026	0.0020	0.0021	0.0031	0.0025	0.0025
127.7 + 121.6 + 326.5	Limit	1	1	1	1	1	1
127.7 + 121.6 + 326.5	Margin	-0.9974	-0.9980	-0.9979	-0.9969	-0.9975	-0.9975

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](326.5kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 326.5	Max H-field (A/m)	0.1227	0.1325	0.1423	0.1325	0.2110	0.3583
127.7 + 121.6 + 326.5	Limit	1	1	1	1	1	1
127.7 + 121.6 + 326.5	Margin	-0.8773	-0.8675	-0.8577	-0.8675	-0.7890	-0.6417

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](326.5kHz)

Test Mode E

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.5200	0.4100	0.3800	0.6000	0.5300	0.5900
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4800	-613.5900	-613.6200	-613.4000	-613.4700	-613.4100
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4800	-306.5900	-306.6200	-306.4000	-306.4700	-306.4100

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0400	0.0700	0.0600	0.0700	0.1700	0.2900
127.7	Max H-field (A/m)	0.0320	0.0560	0.0480	0.0560	0.1360	0.2320
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5980	-1.5740	-1.5820	-1.5740	-1.4940	-1.3980
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7830	-0.7590	-0.7670	-0.7590	-0.6790	-0.5830

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.1900	0.2500	0.2200	0.6100	0.4400	0.5900
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.8100	-613.7500	-613.7800	-613.3900	-613.5600	-613.4100
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.8100	-306.7500	-306.7800	-306.3900	-306.5600	-306.4100

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0500	0.0900	0.0900	0.0800	0.1200	0.2900
121.6	Max H-field (A/m)	0.0400	0.0720	0.0720	0.0640	0.0960	0.2320
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5900	-1.5580	-1.5580	-1.5660	-1.5340	-1.3980
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7750	-0.7430	-0.7430	-0.7510	-0.7190	-0.5830

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max E-field (V/m)	0.4800	0.1400	0.2600	0.2200	0.1300	0.2600
1777.8	Limit (V/m)	463.49	463.49	463.49	463.49	463.49	463.49
1777.8	Margin (V/m)	-463.0100	-463.3500	-463.2300	-463.2700	-463.3600	-463.2300
1777.8	50 % Limit (V/m)	231.745	231.745	231.745	231.745	231.745	231.745
1777.8	50 % Margin (V/m)	-231.2650	-231.6050	-231.4850	-231.5250	-231.6150	-231.4850

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max H-field (uT)	0.0700	0.0200	0.0200	0.0200	0.0200	0.0300
1777.8	Max H-field (A/m)	0.0560	0.0160	0.0160	0.0160	0.0160	0.0240
1777.8	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1777.8	Margin (A/m)	-1.1740	-1.2140	-1.2140	-1.2140	-1.2140	-1.2060
1777.8	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1777.8	50 % Margin (A/m)	-0.5590	-0.5990	-0.5990	-0.5990	-0.5990	-0.5910

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 1777.8	Max E-field (V/m)	0.0022	0.0014	0.0015	0.0024	0.0019	0.0025
127.7 + 121.6 + 1777.8	Limit	1	1	1	1	1	1
127.7 + 121.6 + 1777.8	Margin	-0.9978	-0.9986	-0.9985	-0.9976	-0.9981	-0.9975

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](1777.8kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 1777.8	Max H-field (A/m)	0.0897	0.0915	0.0866	0.0866	0.1553	0.3042
127.7 + 121.6 + 1777.8	Limit	1	1	1	1	1	1
127.7 + 121.6 + 1777.8	Margin	-0.9103	-0.9085	-0.9134	-0.9134	-0.8447	-0.6958

*H-Field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](1777.8kHz)

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.5900	0.4800	0.4500	0.6400	0.5600	0.6200
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4100	-613.5200	-613.5500	-613.3600	-613.4400	-613.3800
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4100	-306.5200	-306.5500	-306.3600	-306.4400	-306.3800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0500	0.0800	0.0800	0.0900	0.1800	0.3100
127.7	Max H-field (A/m)	0.0400	0.0640	0.0640	0.0720	0.1440	0.2480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5900	-1.5660	-1.5660	-1.5580	-1.4860	-1.3820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7750	-0.7510	-0.7510	-0.7430	-0.6710	-0.5670

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.2100	0.2600	0.2400	0.6400	0.4700	0.6200
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.7900	-613.7400	-613.7600	-613.3600	-613.5300	-613.3800
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.7900	-306.7400	-306.7600	-306.3600	-306.5300	-306.3800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0600	0.1000	0.1100	0.1000	0.1400	0.3400
121.6	Max H-field (A/m)	0.0480	0.0800	0.0880	0.0800	0.1120	0.2720
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5820	-1.5500	-1.5420	-1.5500	-1.5180	-1.3580
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7670	-0.7350	-0.7270	-0.7350	-0.7030	-0.5430

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max E-field (V/m)	0.5000	0.1400	0.3000	0.2300	0.1500	0.2700
1777.8	Limit (V/m)	463.49	463.49	463.49	463.49	463.49	463.49
1777.8	Margin (V/m)	-462.9900	-463.3500	-463.1900	-463.2600	-463.3400	-463.2200
1777.8	50 % Limit (V/m)	231.745	231.745	231.745	231.745	231.745	231.745
1777.8	50 % Margin (V/m)	-231.2450	-231.6050	-231.4450	-231.5150	-231.5950	-231.4750

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max H-field (uT)	0.0700	0.0200	0.0200	0.0200	0.0200	0.0300
1777.8	Max H-field (A/m)	0.0560	0.0160	0.0160	0.0160	0.0160	0.0240
1777.8	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1777.8	Margin (A/m)	-1.1740	-1.2140	-1.2140	-1.2140	-1.2140	-1.2060
1777.8	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1777.8	50 % Margin (A/m)	-0.5590	-0.5990	-0.5990	-0.5990	-0.5990	-0.5910

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 1777.8	Max E-field (V/m)	0.0024	0.0015	0.0018	0.0026	0.0020	0.0026
127.7 + 121.6 + 1777.8	Limit	1	1	1	1	1	1
127.7 + 121.6 + 1777.8	Margin	-0.9976	-0.9985	-0.9982	-0.9974	-0.9980	-0.9974

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](1777.8kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 1777.8	Max H-field (A/m)	0.0995	0.1014	0.1063	0.1063	0.1701	0.3385
127.7 + 121.6 + 1777.8	Limit	1	1	1	1	1	1
127.7 + 121.6 + 1777.8	Margin	-0.9005	-0.8986	-0.8937	-0.8937	-0.8299	-0.6615

*H-Field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](1777.8kHz)

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max E-field (V/m)	0.6000	0.4900	0.4800	0.6700	0.5900	0.6500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4000	-613.5100	-613.5200	-613.3300	-613.4100	-613.3500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4000	-306.5100	-306.5200	-306.3300	-306.4100	-306.3500

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7	Max H-field (uT)	0.0700	0.0900	0.1200	0.1100	0.1700	0.3300
127.7	Max H-field (A/m)	0.0560	0.0720	0.0960	0.0880	0.1360	0.2640
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.5740	-1.5580	-1.5340	-1.5420	-1.4940	-1.3660
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7590	-0.7430	-0.7190	-0.7270	-0.6790	-0.5510

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.2200	0.2800	0.2700	0.6900	0.5100	0.6600
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.7800	-613.7200	-613.7300	-613.3100	-613.4900	-613.3400
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.7800	-306.7200	-306.7300	-306.3100	-306.4900	-306.3400

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0700	0.1200	0.1200	0.1100	0.1600	0.3600
121.6	Max H-field (A/m)	0.0560	0.0960	0.0960	0.0880	0.1280	0.2880
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5740	-1.5340	-1.5340	-1.5420	-1.5020	-1.3420
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7590	-0.7190	-0.7190	-0.7270	-0.6870	-0.5270

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max E-field (V/m)	0.5100	0.1500	0.3100	0.2300	0.1500	0.2800
1777.8	Limit (V/m)	463.49	463.49	463.49	463.49	463.49	463.49
1777.8	Margin (V/m)	-462.9800	-463.3400	-463.1800	-463.2600	-463.3400	-463.2100
1777.8	50 % Limit (V/m)	231.745	231.745	231.745	231.745	231.745	231.745
1777.8	50 % Margin (V/m)	-231.2350	-231.5950	-231.4350	-231.5150	-231.5950	-231.4650

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max H-field (uT)	0.0900	0.0300	0.0200	0.0200	0.0200	0.0300
1777.8	Max H-field (A/m)	0.0720	0.0240	0.0160	0.0160	0.0160	0.0240
1777.8	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1777.8	Margin (A/m)	-1.1580	-1.2060	-1.2140	-1.2140	-1.2140	-1.2060
1777.8	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1777.8	50 % Margin (A/m)	-0.5430	-0.5910	-0.5990	-0.5990	-0.5990	-0.5910

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 1777.8	Max E-field (V/m)	0.0024	0.0016	0.0019	0.0027	0.0021	0.0027
127.7 + 121.6 + 1777.8	Limit	1	1	1	1	1	1
127.7 + 121.6 + 1777.8	Margin	-0.9976	-0.9984	-0.9981	-0.9973	-0.9979	-0.9973

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](1777.8kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
127.7 + 121.6 + 1777.8	Max H-field (A/m)	0.1272	0.1226	0.1308	0.1210	0.1750	0.3582
127.7 + 121.6 + 1777.8	Limit	1	1	1	1	1	1
127.7 + 121.6 + 1777.8	Margin	-0.8728	-0.8774	-0.8692	-0.8790	-0.8250	-0.6418

*H-Field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](1777.8kHz)

Test Mode F

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.2500	0.3400	0.3600	0.8500	0.2200	0.3300
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.7500	-613.6600	-613.6400	-613.1500	-613.7800	-613.6700
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.7500	-306.6600	-306.6400	-306.1500	-306.7800	-306.6700

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0400	0.0700	0.0700	0.0600	0.0500	0.1000
121.6	Max H-field (A/m)	0.0320	0.0560	0.0560	0.0480	0.0400	0.0800
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5980	-1.5740	-1.5740	-1.5820	-1.5900	-1.5500
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7830	-0.7590	-0.7590	-0.7670	-0.7750	-0.7350

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.2500	0.3800	0.3600	0.8700	0.1900	0.3300
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.7500	-613.6200	-613.6400	-613.1300	-613.8100	-613.6700
360.0	50 % Limit (V/m)	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.7500	-306.6200	-306.6400	-306.1300	-306.8100	-306.6700

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0400	0.0700	0.0700	0.0600	0.0600	0.1000
360.0	Max H-field (A/m)	0.0320	0.0560	0.0560	0.0480	0.0480	0.0800
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5980	-1.5740	-1.5740	-1.5820	-1.5820	-1.5500
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7830	-0.7590	-0.7590	-0.7670	-0.7670	-0.7350

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6 + 360.0	Max E-field (V/m)	0.0008	0.0012	0.0012	0.0028	0.0007	0.0011
121.6 + 360.0	Limit	1	1	1	1	1	1
121.6 + 360.0	Margin	-0.9992	-0.9988	-0.9988	-0.9972	-0.9993	-0.9989

*E-field Total Ratio = [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](360.0kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6 + 360.0	Max H-field (A/m)	0.0393	0.0687	0.0687	0.0589	0.0540	0.0982
121.6 + 360.0	Limit	1	1	1	1	1	1
121.6 + 360.0	Margin	-0.9607	-0.9313	-0.9313	-0.9411	-0.9460	-0.9018

*H-field Total Ratio = [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](360.0kHz)

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.1600	0.2800	0.3200	0.8400	0.1400	0.3300
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.8400	-613.7200	-613.6800	-613.1600	-613.8600	-613.6700
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.8400	-306.7200	-306.6800	-306.1600	-306.8600	-306.6700

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0500	0.0900	0.0800	0.0800	0.0700	0.1200
121.6	Max H-field (A/m)	0.0400	0.0720	0.0640	0.0640	0.0560	0.0960
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5900	-1.5580	-1.5660	-1.5660	-1.5740	-1.5340
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7750	-0.7430	-0.7510	-0.7510	-0.7590	-0.7190

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.1800	0.3200	0.2900	0.8000	0.1300	0.3600
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.8200	-613.6800	-613.7100	-613.2000	-613.8700	-613.6400
360.0	50 % Limit (V/m)	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.8200	-306.6800	-306.7100	-306.2000	-306.8700	-306.6400

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0500	0.1100	0.0900	0.0800	0.1100	0.1200
360.0	Max H-field (A/m)	0.0400	0.0880	0.0720	0.0640	0.0880	0.0960
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5900	-1.5420	-1.5580	-1.5660	-1.5420	-1.5340
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7750	-0.7270	-0.7430	-0.7510	-0.7270	-0.7190

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6 + 360.0	Max E-field (V/m)	0.0006	0.0010	0.0010	0.0027	0.0004	0.0011
121.6 + 360.0	Limit	1	1	1	1	1	1
121.6 + 360.0	Margin	-0.9994	-0.9990	-0.9990	-0.9973	-0.9996	-0.9989

*E-field Total Ratio = [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](360.0kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6 + 360.0	Max H-field (A/m)	0.0491	0.0982	0.0834	0.0785	0.0883	0.1178
121.6 + 360.0	Limit	1	1	1	1	1	1
121.6 + 360.0	Margin	-0.9509	-0.9018	-0.9166	-0.9215	-0.9117	-0.8822

*H-field Total Ratio = [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](360.0kHz)

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max E-field (V/m)	0.2400	0.3600	0.3600	0.8500	0.1800	0.3600
121.6	Limit (V/m)	614	614	614	614	614	614
121.6	Margin (V/m)	-613.7600	-613.6400	-613.6400	-613.1500	-613.8200	-613.6400
121.6	50 % Limit (V/m)	307	307	307	307	307	307
121.6	50 % Margin (V/m)	-306.7600	-306.6400	-306.6400	-306.1500	-306.8200	-306.6400

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6	Max H-field (uT)	0.0800	0.1000	0.1100	0.0900	0.1100	0.1400
121.6	Max H-field (A/m)	0.0640	0.0800	0.0880	0.0720	0.0880	0.1120
121.6	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
121.6	Margin (A/m)	-1.5660	-1.5500	-1.5420	-1.5580	-1.5420	-1.5180
121.6	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
121.6	50 % Margin (A/m)	-0.7510	-0.7350	-0.7270	-0.7430	-0.7270	-0.7030

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.3200	0.4800	0.4600	0.9500	0.2500	0.4000
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.6800	-613.5200	-613.5400	-613.0500	-613.7500	-613.6000
360.0	50 % Limit (V/m)	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.6800	-306.5200	-306.5400	-306.0500	-306.7500	-306.6000

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0700	0.1200	0.1300	0.1000	0.1000	0.1600
360.0	Max H-field (A/m)	0.0560	0.0960	0.1040	0.0800	0.0800	0.1280
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5740	-1.5340	-1.5260	-1.5500	-1.5500	-1.5020
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7590	-0.7190	-0.7110	-0.7350	-0.7350	-0.6870

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6 + 360.0	Max E-field (V/m)	0.0009	0.0014	0.0013	0.0029	0.0007	0.0012
121.6 + 360.0	Limit	1	1	1	1	1	1
121.6 + 360.0	Margin	-0.9991	-0.9986	-0.9987	-0.9971	-0.9993	-0.9988

*E-field Total Ratio = [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](360.0kHz)

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
121.6 + 360.0	Max H-field (A/m)	0.0736	0.1080	0.1178	0.0933	0.1031	0.1472
121.6 + 360.0	Limit	1	1	1	1	1	1
121.6 + 360.0	Margin	-0.9264	-0.8920	-0.8822	-0.9067	-0.8969	-0.8528

*H-field Total Ratio = [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](360.0kHz)

Test Mode G

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.3200	0.2100	0.1800	0.4000	0.3300	0.4100
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.6800	-613.7900	-613.8200	-613.6000	-613.6700	-613.5900
360.0	50 % Limit (V/m)	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.6800	-306.7900	-306.8200	-306.6000	-306.6700	-306.5900

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0300	0.0600	0.0500	0.0600	0.1100	0.1200
360.0	Max H-field (A/m)	0.0240	0.0480	0.0400	0.0480	0.0880	0.0960
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.6060	-1.5820	-1.5900	-1.5820	-1.5420	-1.5340
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7910	-0.7670	-0.7750	-0.7670	-0.7270	-0.7190

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.3900	0.2800	0.2500	0.4400	0.3600	0.4300
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.6100	-613.7200	-613.7500	-613.5600	-613.6400	-613.5700
360.0	50 % Limit (V/m)	307	307	307	307	307.0000	307
360.0	50 % Margin (V/m)	-306.6100	-306.7200	-306.7500	-306.5600	-306.6400	-306.5700

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0400	0.0700	0.0700	0.0800	0.1200	0.1300
360.0	Max H-field (A/m)	0.0320	0.0560	0.0560	0.0640	0.0960	0.1040
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5980	-1.5740	-1.5740	-1.5660	-1.5340	-1.5260
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7830	-0.7590	-0.7590	-0.7510	-0.7190	-0.7110

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.4000	0.2900	0.2800	0.4700	0.3900	0.4500
360.0	Limit (V/m)	614	614	614	614	614	614
360.0	Margin (V/m)	-613.6000	-613.7100	-613.7200	-613.5300	-613.6100	-613.5500
360.0	50 % Limit (V/m)	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.6000	-306.7100	-306.7200	-306.5300	-306.6100	-306.5500

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0600	0.0800	0.1100	0.1000	0.1400	0.1500
360.0	Max H-field (A/m)	0.0480	0.0640	0.0880	0.0800	0.1120	0.1200
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5820	-1.5660	-1.5420	-1.5500	-1.5180	-1.5100
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7670	-0.7510	-0.7270	-0.7350	-0.7030	-0.6950

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode H

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max E-field (V/m)	0.4500	0.1400	0.2500	0.2200	0.1300	0.2200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5500	-613.8600	-613.7500	-613.7800	-613.8700	-613.7800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5500	-306.8600	-306.7500	-306.7800	-306.8700	-306.7800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max H-field (uT)	0.0700	0.0200	0.0200	0.0200	0.0200	0.0200
326.5	Max H-field (A/m)	0.0560	0.0160	0.0160	0.0160	0.0160	0.0160
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5740	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7590	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max E-field (V/m)	0.4600	0.1500	0.2600	0.2200	0.1300	0.2200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5400	-613.8500	-613.7400	-613.7800	-613.8700	-613.7800
326.5	50 % Limit (V/m)	307	307	307	307	307.0000	307
326.5	50 % Margin (V/m)	-306.5400	-306.8500	-306.7400	-306.7800	-306.8700	-306.7800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max H-field (uT)	0.0600	0.0300	0.0200	0.0200	0.0200	0.0200
326.5	Max H-field (A/m)	0.0480	0.0240	0.0160	0.0160	0.0160	0.0160
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5820	-1.6060	-1.6140	-1.6140	-1.6140	-1.6140
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7670	-0.7910	-0.7990	-0.7990	-0.7990	-0.7990

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max E-field (V/m)	0.4800	0.1500	0.2600	0.2300	0.1400	0.2300
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5200	-613.8500	-613.7400	-613.7700	-613.8600	-613.7700
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5200	-306.8500	-306.7400	-306.7700	-306.8600	-306.7700

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
326.5	Max H-field (uT)	0.0600	0.0300	0.0200	0.0200	0.0200	0.0300
326.5	Max H-field (A/m)	0.0480	0.0240	0.0160	0.0160	0.0160	0.0240
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5820	-1.6060	-1.6140	-1.6140	-1.6140	-1.6060
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7670	-0.7910	-0.7990	-0.7990	-0.7990	-0.7910

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode I

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max E-field (V/m)	0.4800	0.1400	0.2600	0.2200	0.1300	0.2300
1777.8	Limit (V/m)	463.49	463.49	463.49	463.49	463.49	463.49
1777.8	Margin (V/m)	-463.0100	-463.3500	-463.2300	-463.2700	-463.3600	-463.2600
1777.8	50 % Limit (V/m)	231.745	231.745	231.745	231.745	231.745	231.745
1777.8	50 % Margin (V/m)	-231.2650	-231.6050	-231.4850	-231.5250	-231.6150	-231.5150

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max H-field (uT)	0.0600	0.0200	0.0200	0.0200	0.0200	0.0200
1777.8	Max H-field (A/m)	0.0480	0.0160	0.0160	0.0160	0.0160	0.0160
1777.8	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1777.8	Margin (A/m)	-1.1820	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140
1777.8	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1777.8	50 % Margin (A/m)	-0.5670	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max E-field (V/m)	0.5000	0.1400	0.3000	0.2300	0.1500	0.2300
1777.8	Limit (V/m)	463.49	463.49	463.49	463.49	463.49	463.49
1777.8	Margin (V/m)	-462.9900	-463.3500	-463.1900	-463.2600	-463.3400	-463.2600
1777.8	50 % Limit (V/m)	231.745	231.745	231.745	231.745	231.7450	231.745
1777.8	50 % Margin (V/m)	-231.2450	-231.6050	-231.4450	-231.5150	-231.5950	-231.5150

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max H-field (uT)	0.0600	0.0200	0.0200	0.0200	0.0200	0.0200
1777.8	Max H-field (A/m)	0.0480	0.0160	0.0160	0.0160	0.0160	0.0160
1777.8	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1777.8	Margin (A/m)	-1.1820	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140
1777.8	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1777.8	50 % Margin (A/m)	-0.5670	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode, battery Max Charge

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max E-field (V/m)	0.5100	0.1500	0.3100	0.2300	0.1500	0.2400
1777.8	Limit (V/m)	463.49	463.49	463.49	463.49	463.49	463.49
1777.8	Margin (V/m)	-462.9800	-463.3400	-463.1800	-463.2600	-463.3400	-463.2500
1777.8	50 % Limit (V/m)	231.745	231.745	231.745	231.745	231.745	231.745
1777.8	50 % Margin (V/m)	-231.2350	-231.5950	-231.4350	-231.5150	-231.5950	-231.5050

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
1777.8	Max H-field (uT)	0.0800	0.0300	0.0200	0.0200	0.0200	0.0200
1777.8	Max H-field (A/m)	0.0640	0.0240	0.0160	0.0160	0.0160	0.0160
1777.8	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1777.8	Margin (A/m)	-1.1660	-1.2060	-1.2140	-1.2140	-1.2140	-1.2140
1777.8	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1777.8	50 % Margin (A/m)	-0.5510	-0.5910	-0.5990	-0.5990	-0.5990	-0.5990

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode J

Output 2: 5W Qi BPP Wireless Charging Pad (Airpods)

E-Field (20cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max E-field (V/m)	0.2100	0.2800	0.1800	0.4000	0.4300	0.5800
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-613.7900	-613.7200	-613.8200	-613.6000	-613.5700	-613.4200
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-306.7900	-306.7200	-306.8200	-306.6000	-306.5700	-306.4200

H-Field (20cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max H-field (uT)	0.0500	0.0500	0.0400	0.0500	0.0600	0.1400
Max H-field (A/m)	0.0400	0.0400	0.0320	0.0400	0.0480	0.1120
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5900	-1.5900	-1.5980	-1.5900	-1.5820	-1.5180
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7750	-0.7750	-0.7830	-0.7750	-0.7670	-0.7030

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Output 1: 15W Qi2 MPP/BPP Fast Wireless Charging Pad

E-Field (20cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max E-field (V/m)	0.2000	0.2700	0.1700	0.4000	0.4500	0.5500
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-613.8000	-613.7300	-613.8300	-613.6000	-613.5500	-613.4500
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-306.8000	-306.7300	-306.8300	-306.6000	-306.5500	-306.4500

H-Field (20cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max H-field (uT)	0.0500	0.0600	0.0500	0.0500	0.0800	0.1400
Max H-field (A/m)	0.0400	0.0480	0.0400	0.0400	0.0640	0.1120
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5900	-1.5820	-1.5900	-1.5900	-1.5660	-1.5180
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7750	-0.7670	-0.7750	-0.7750	-0.7510	-0.7030

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Output 3: BoostCharge Portable USB-C Apple Watch Charger

E-Field (20cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max E-field (V/m)	0.4700	0.1200	0.2500	0.1600	0.1200	0.2300
Limit (V/m)	614	614	614	614	614	614
Margin (V/m)	-613.5300	-613.8800	-613.7500	-613.8400	-613.8800	-613.7700
50 % Limit (V/m)	307	307	307	307	307	307
50 % Margin (V/m)	-306.5300	-306.8800	-306.7500	-306.8400	-306.8800	-306.7700

H-Field (20cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max H-field (uT)	0.0600	0.0200	0.0200	0.0200	0.0200	0.0200
Max H-field (A/m)	0.0480	0.0160	0.0160	0.0160	0.0160	0.0160
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5820	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7670	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Measurements were made from all sides and the top of the primary/client pair, with the 20cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Output 1 + Output 2 + Output 3:

H-Field (20cm)						
Z-axis (Above)	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max E-field (V/m)	0.0014	0.0011	0.0010	0.0016	0.0016	0.0022
Limit	1	1	1	1	1	1
Margin	-0.9986	-0.9989	-0.9990	-0.9984	-0.9984	-0.9978

*E-field Total Ratio = [Max E-field / Limit](121.6kHz) + [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](326.5kHz)

H-Field (20cm)						
Z-axis (Above)	Left	Right	Top	Bottom	Z-axis (Below)	Z-axis (Above)
Max H-field (A/m)	0.0785	0.0638	0.0540	0.0589	0.0785	0.1472
Limit	1	1	1	1	1	1
Margin	-0.9215	-0.9362	-0.9460	-0.9411	-0.9215	-0.8528

*H-field Total Ratio = [Max H-field / Limit](121.6kHz) + [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](326.5kHz)

5. Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---