


Belkin International, Inc.

555 S. Aviation Blvd., Suite 180, El Segundo, CA 90245, USA

## 1、 Test Environment




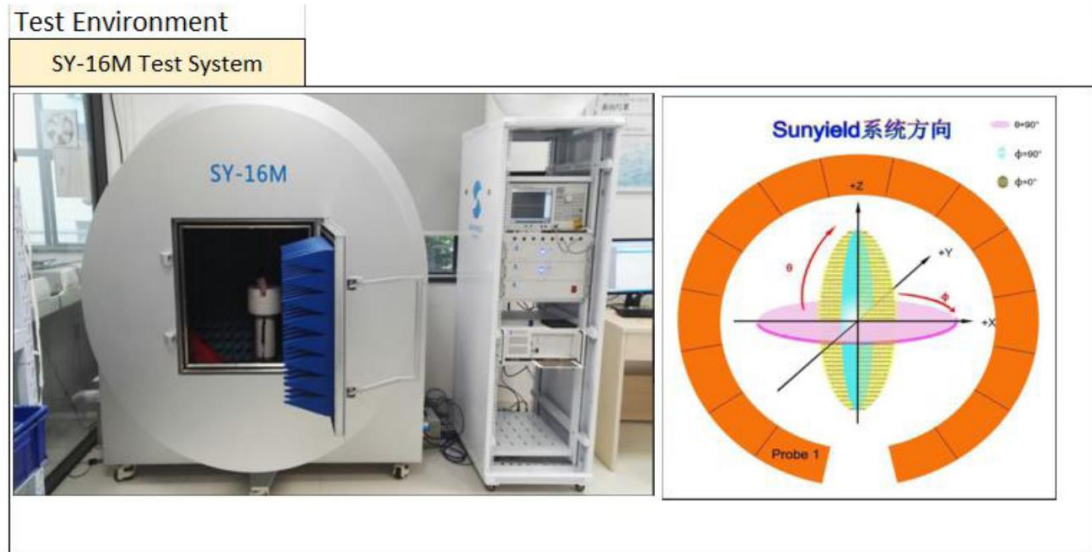


## 2、 Antenna Spec

Parameter	Value
Frequency Range	2.4 ~ 2.5 GHz
Antenna Gain	1.3 dBi
Antenna Type	PCB Antenna

### 3、Test Result

#### 4.1 Passive Test

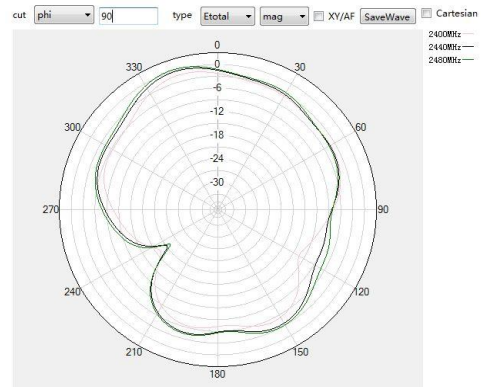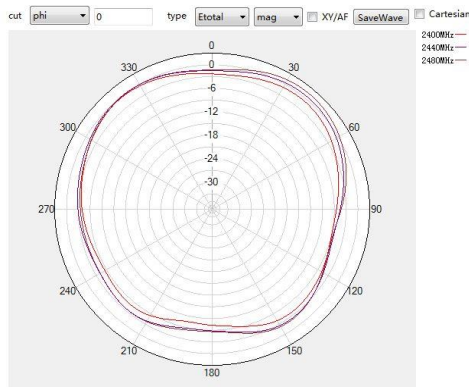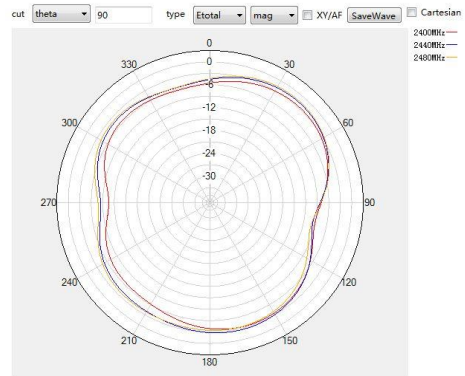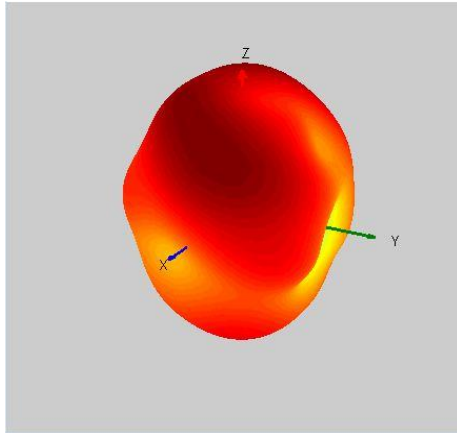

Gain & Efficiency			
Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	-0.13	-4.20	38.02
2410	-0.08	-3.93	40.42
2420	-0.07	-3.72	42.44
2430	0.05	-3.70	42.68
2440	0.37	-3.57	43.94
2450	0.59	-3.57	43.97
2460	1.08	-3.35	46.22
2470	1.27	-3.19	47.93
2480	1.25	-3.28	47.01
2490	1.30	-3.24	47.42
2500	1.29	-3.21	47.72
MIN	-0.13	-4.20	38.02
MAX	1.30	-3.19	47.93
AVG	0.63	-3.54	44.34