



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

FCC Test Report

FCC ID : K7T-BPM2001
Equipment : CSR8311 BlueTooth Module
Model No. : BPM2001
Brand Name : Radicom Research Inc
Applicant : Radicom Research Inc
Address : 2148 Bering Drive, San Jose, California 95131
Standard : 47 CFR FCC Part 15.247
Received Date : Aug. 07, 2013
Tested Date : Aug. 07 ~ Aug. 26, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:


Gary Chang / Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List.....	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth	15
3.3	RF Output Power	18
3.4	Power Spectral Density	20
3.5	Unwanted Emissions into Restricted Frequency Bands	22
3.6	Emissions in non-restricted frequency bands	32



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Release Record

Report No.	Version	Description	Issued Date
FR381603AE	Rev. 01	Initial issue	Sep. 05, 2013



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.157MHz 41.73 (Margin -13.87dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4960MHz 51.06 (Margin -2.94dB) - AV	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 8.93	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate / MCS
2400-2483.5	BR	2402-2480	0-39 [40]	1 Mbps
Note 1: Bluetooth BR uses a GFSK (1Mbps). Note 2: Bluetooth BR uses as a system using FHSS modulation.				

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Remark
1	Inverted-F	-1	---

1.1.3 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC (3.3Vdc)	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> From Host

1.1.4 Accessories

N/A



1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test tool	Blue Test3 ver. 2.4.8.0
Duty cycle of test signal (%)	65.93%
Duty Factor (dB)	1.81

1.1.7 Power Setting


Modulation Mode	Test Frequency (MHz)	Power Set
GFSK	2402	Default
GFSK	2440	Default
GFSK	2480	Default



1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6420	---	DoC	USB 1.8m non-shielded cable w/o core.

1.3 Test Setup Chart

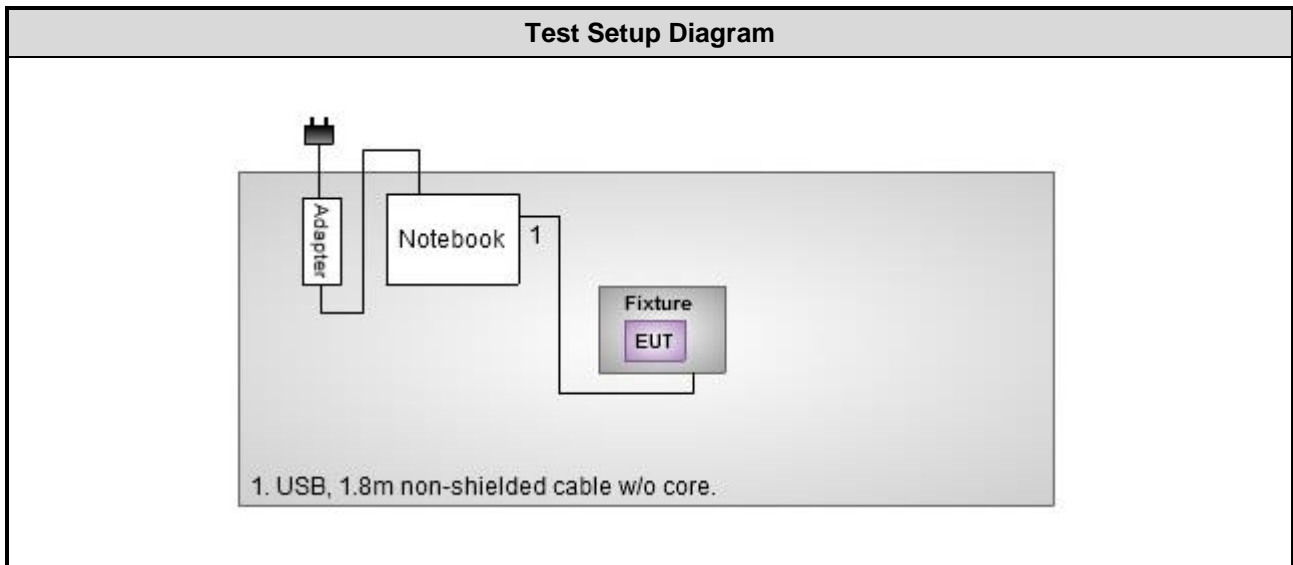



1.4 Test Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 02, 2012	Oct. 01, 2013
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014
ISN	TESEQ	ISN T8-Cat6	27262	Sep. 17, 2012	Sep. 16, 2013
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 30, 2013	Jan. 29, 2014
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH01-WS	Jan. 04, 2013	Jan. 03, 2014
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Jan. 23, 2014
Receiver	ROHDE&SCHWARZ	ESR3	101658	Jan. 28, 2013	Jan. 27, 2014
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Feb. 17, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Nov. 27, 2013
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Dec. 17, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Dec. 24, 2013



Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Dec. 24, 2013
control	EM Electronics	EM1000	60612	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Apr. 18, 2015
Note: Calibration Interval of instruments listed above is two year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 29, 2012	Nov. 28, 2013
Power Meter	Anritsu	ML2495A	1241002	Oct. 15, 2012	Oct. 14, 2013
Power Sensor	Anritsu	MA2411B	1027366	Oct. 24, 2012	Oct. 23, 2013
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 13, 2014
Radio Communication Analyzer	Anritsu	MT8820C	6201240341	Mar. 13, 2013	Mar. 12, 2014
Wideband Radio Communication Tester	R&S	CMW500	106070	Jan. 29, 2013	Jan. 28, 2014
Bluetooth Tester	R&S	CBT	100959	Jan. 09, 2013	Jan. 08, 2014
MXG-B RF Vector Signal Generator	Agilent	N5182B	MY53050081	Apr. 19, 2013	Apr. 18, 2014
Mobile WiMAX test set	Agilent	E6651A	MY47310158	Oct. 09, 2012	Oct. 09, 2013
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.



1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 35.286 Hz
Conducted power	± 0.536 dB
Frequency error	± 35.286 Hz
Temperature	± 0.3 °C
Conducted emission	± 2.946 dB
AC conducted emission	± 2.43 dB
Radiated emission	± 2.49 dB



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 66%	Peter Lin
Radiated Emissions	03CH01-WS	23°C / 65%	Haru Yang
RF Conducted	TH01-WS	24°C / 61%	Brad Wu

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test channel	Data rate (Mbps)	Test Configuration
Conducted Emissions	GFSK	2440	1Mbps	-
Radiated Emissions (below 1GHz)	GFSK	2440	1Mbps	-
Radiated Emissions (above 1GHz)	GFSK	2402, 2440, 2480	1Mbps	-
Fundamental Emission Output Power				
6dB bandwidth				
Power spectral density				

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

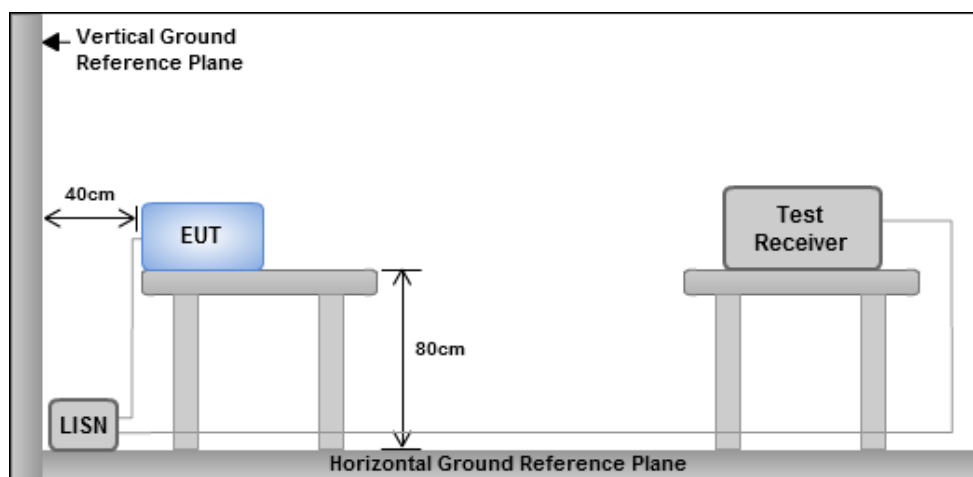


- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



3.1.4 Test Result of Conducted Emissions

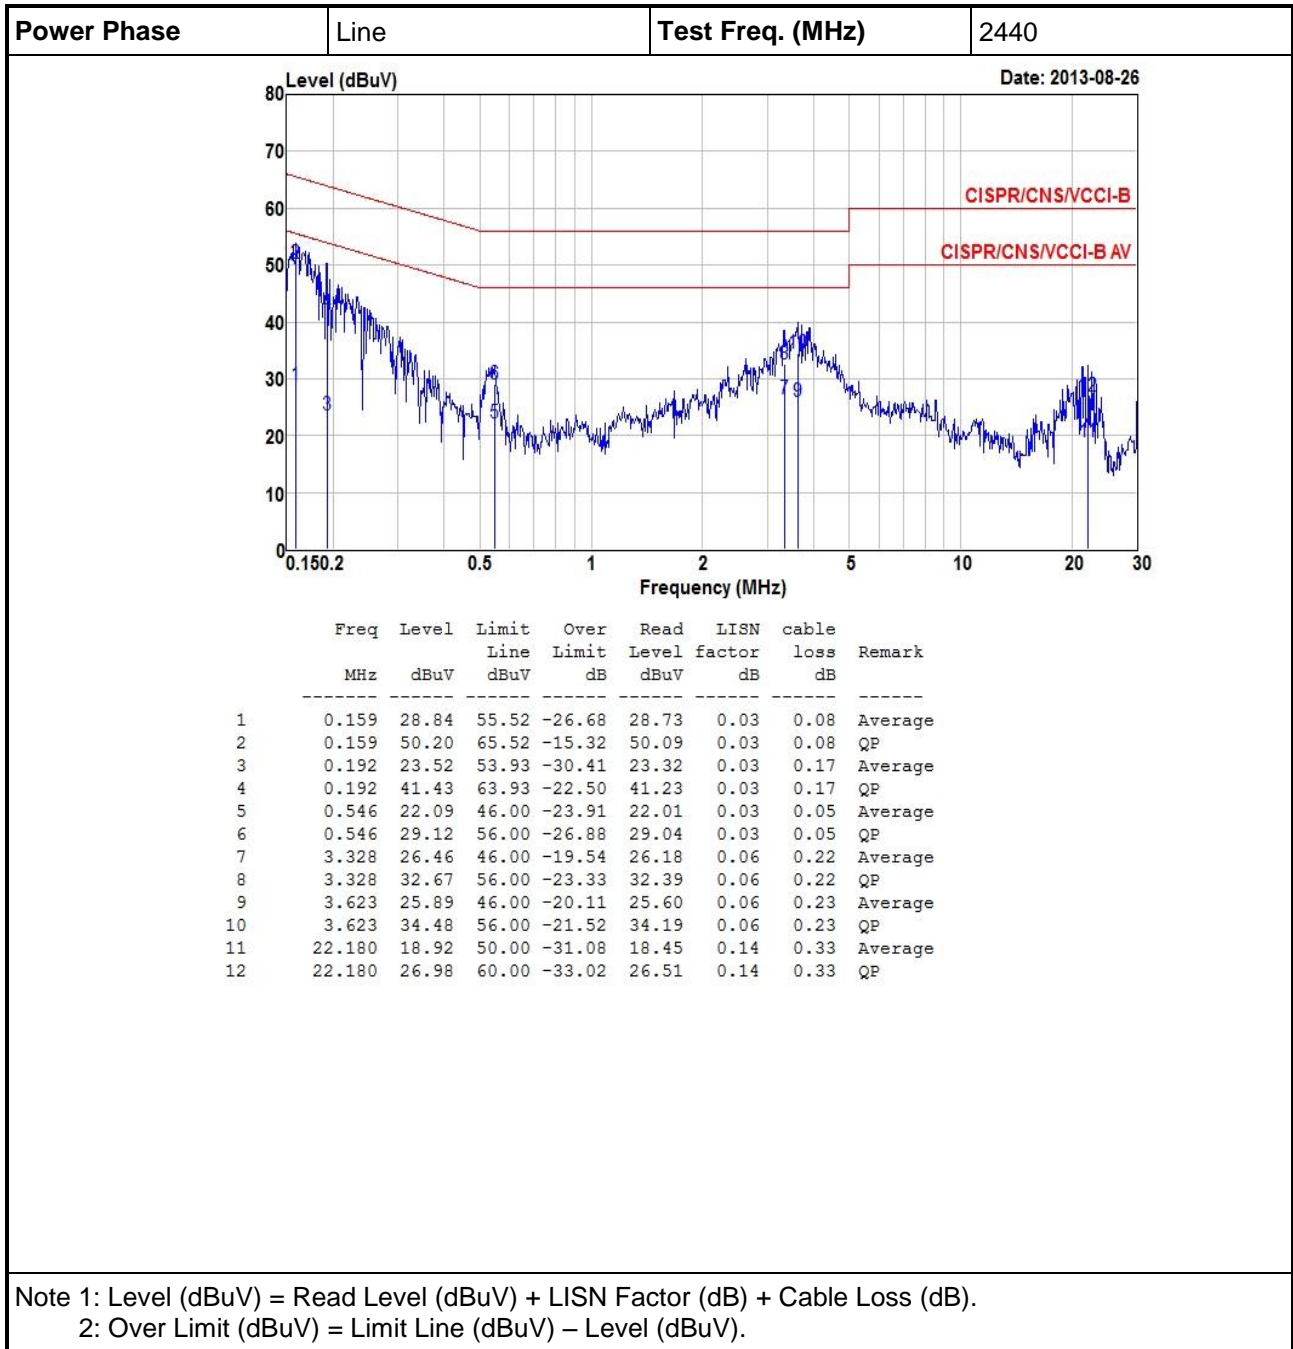

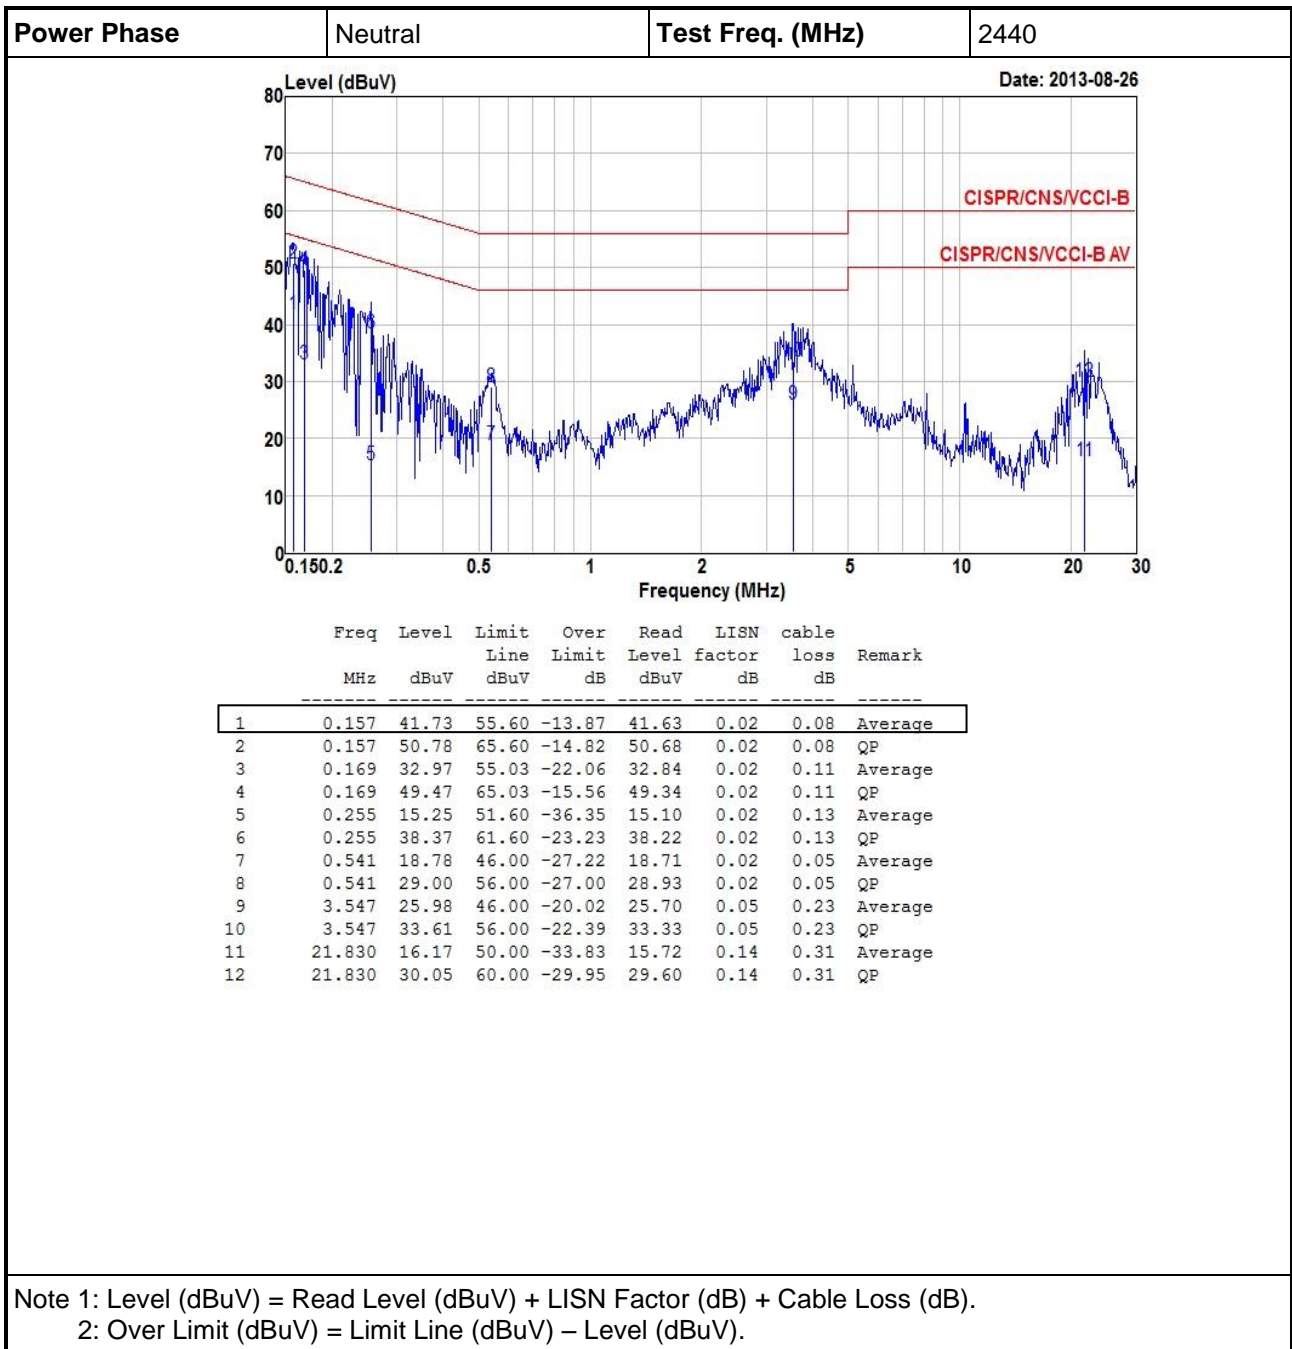



3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.


3.2.3 Test Setup

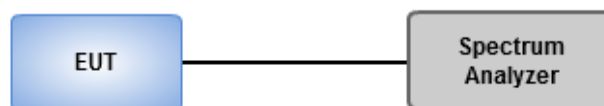




3.2.4 Test Result of 6dB and Occupied Bandwidth

Freq. (MHz)	6dB Bandwidth (MHz)	Limit (kHz)
2402	0.696	500
2440	0.696	500
2480	0.700	500

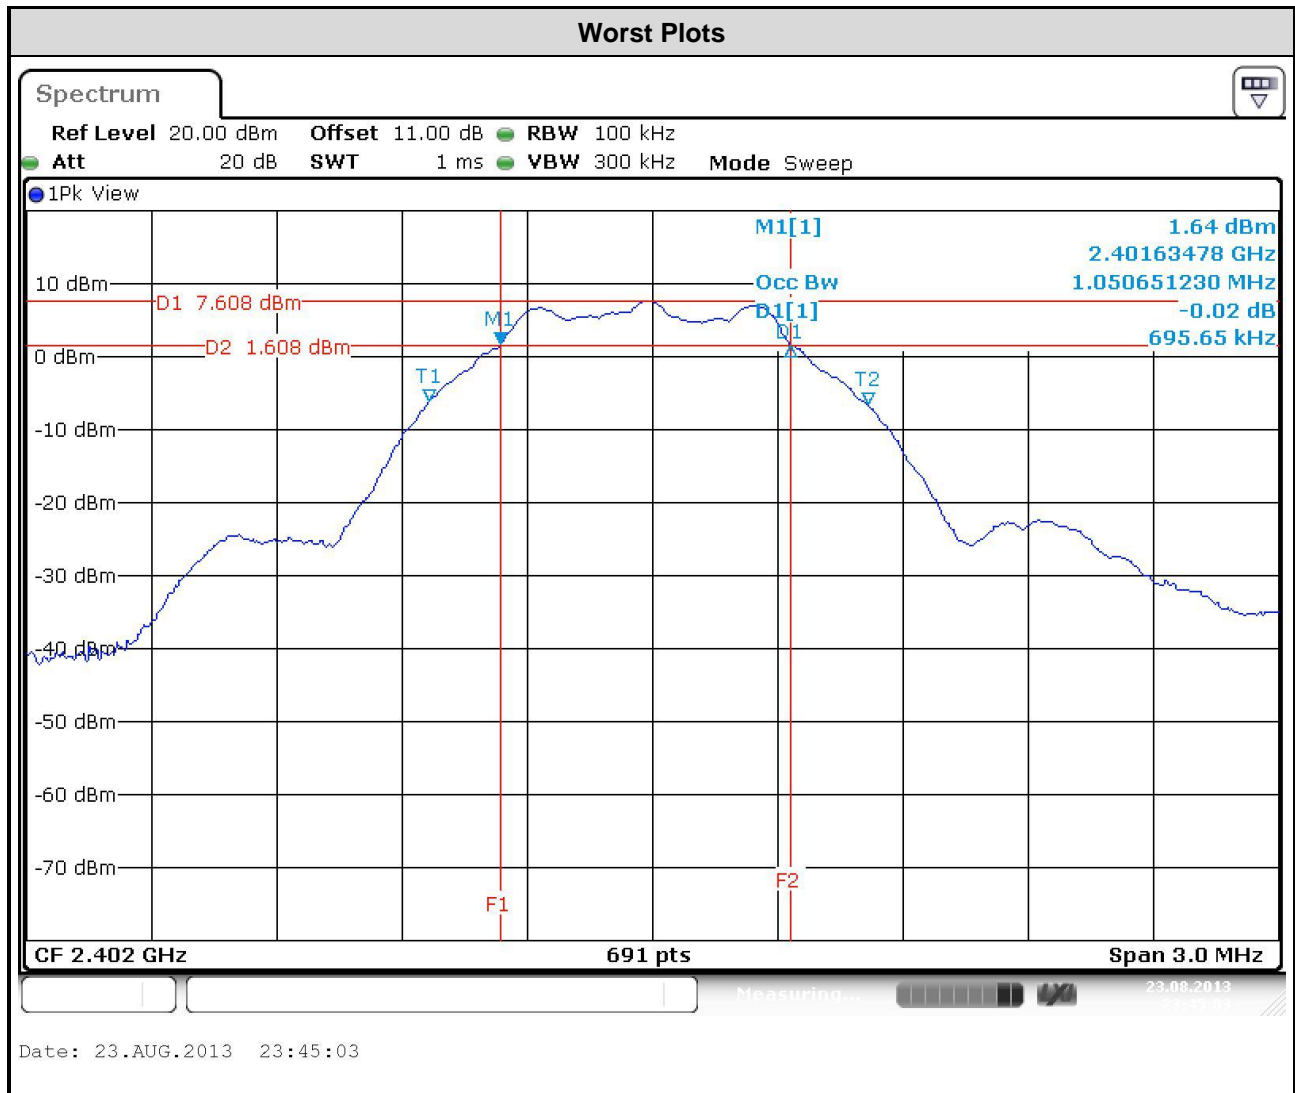



Freq. (MHz)	99% Occupied Bandwidth (MHz)
2402	1.02
2440	1.02
2480	1.02

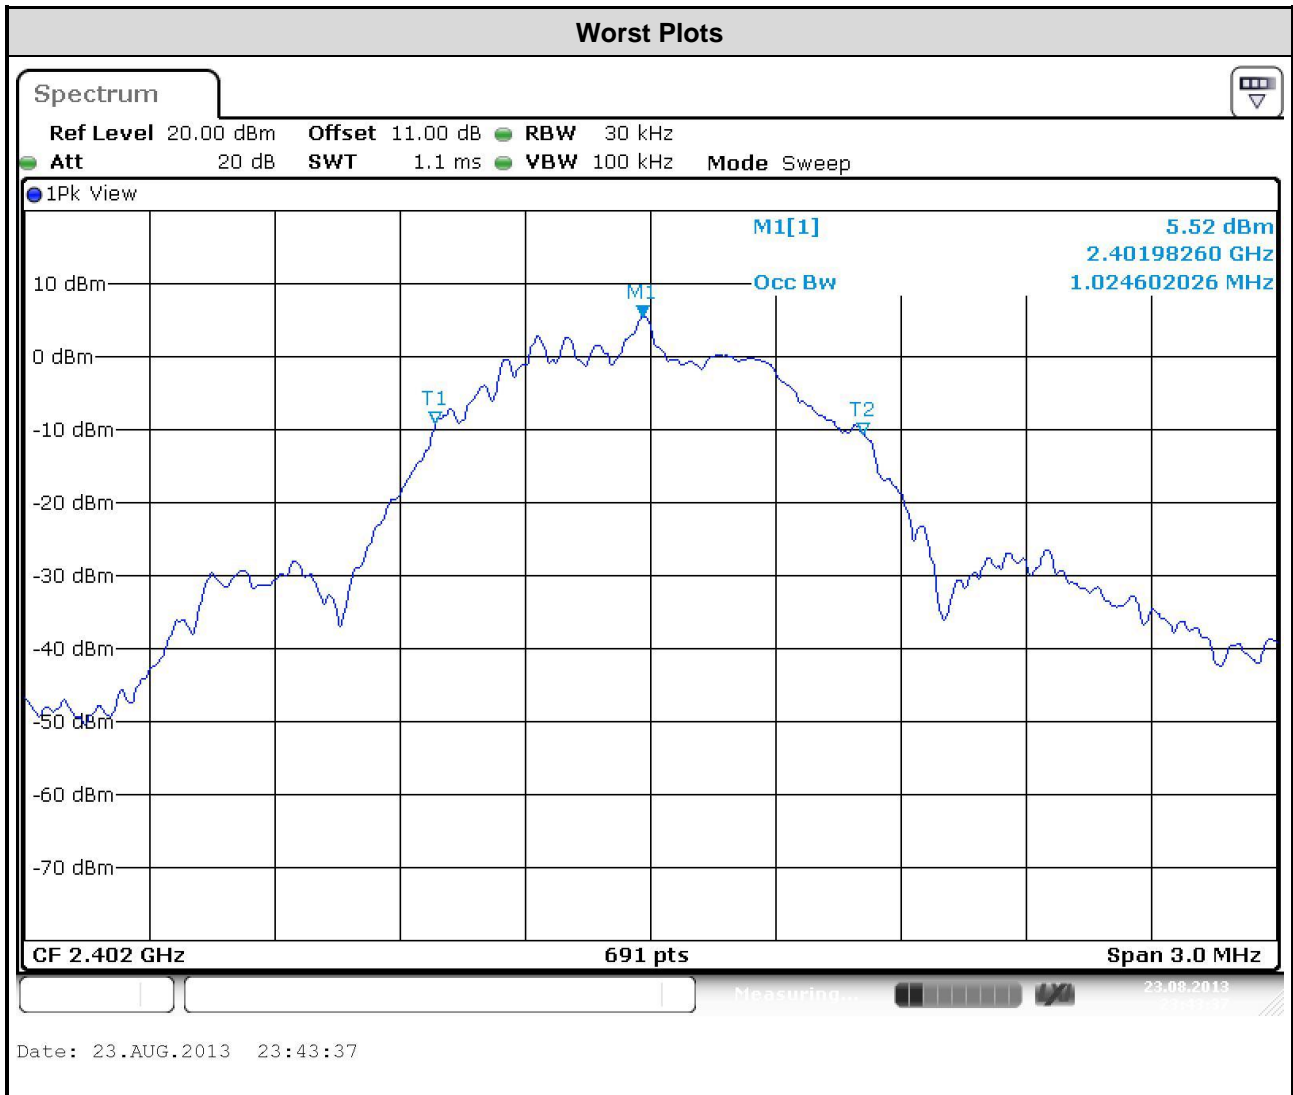



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

- Antenna gain \leq 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain $>$ 6dBi
 - Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
 - Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = RMS.
 2. Set the sweep time to: $\geq 10 \times$ (number of measurement points in sweep) \times (maximum data rate per stream).
 3. Perform the measurement over a single sweep.
 4. Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW(26dBc) band edges.
 - Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.



3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Freq. (MHz)	Peak Power (dBm)	Limit (dBm)
2402	7.76	30
2440	8.61	30
2480	8.93	30

Freq. (MHz)	Average Conducted Power (dBm)	Limit (dBm)
2402	7.51	30
2440	8.44	30
2480	8.75	30

Note: Average power is for reference only.



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 10kHz, VBW = 30kHz.
 2. Detector = Peak, Sweep time = auto couple.
 3. Trace mode = max hold, allow trace to fully stabilize.
 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 100kHz, VBW = 300 kHz.
 2. Detector = RMS, Sweep time = auto couple.
 3. Set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{maximum data rate per stream})$.
 4. Perform the measurement over a single sweep.
 5. Use the peak marker function to determine the maximum amplitude level.\


3.4.3 Test Setup

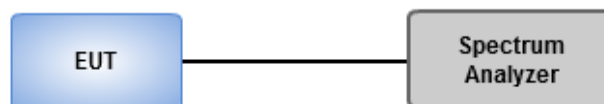



3.4.4 Test Result of Power Spectral Density

Freq. (MHz)	Power Spectral Density (dBm / 10kHz)	Limit (dBm/3kHz)
2402	-2.02	8
2440	-0.99	8
2480	-0.74	8

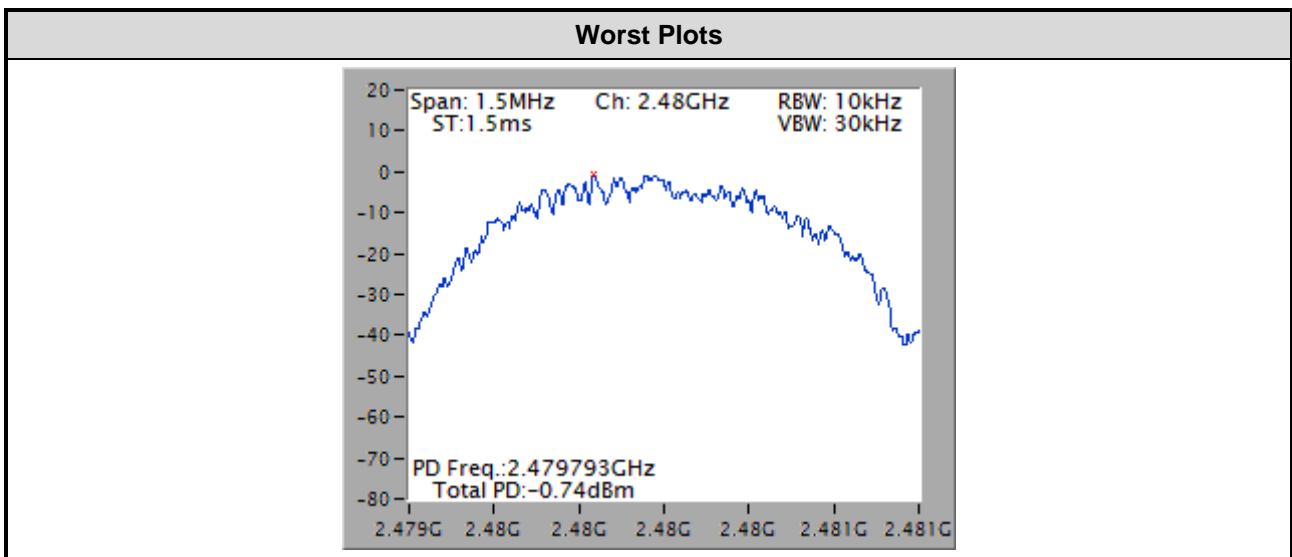



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.




3.5.3 Test Setup

Radiated Emissions below 1 GHz

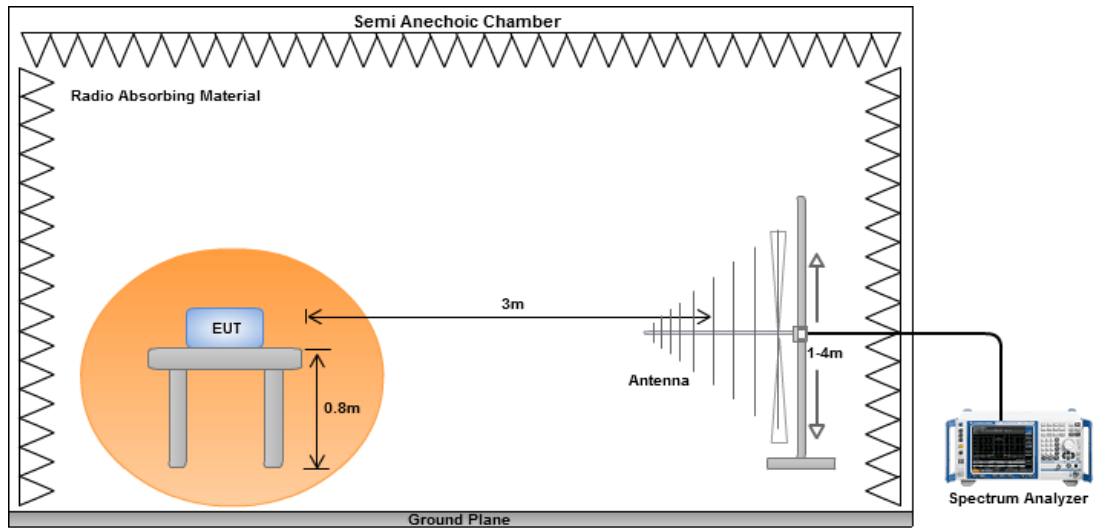

Radiated Emissions above 1 GHz

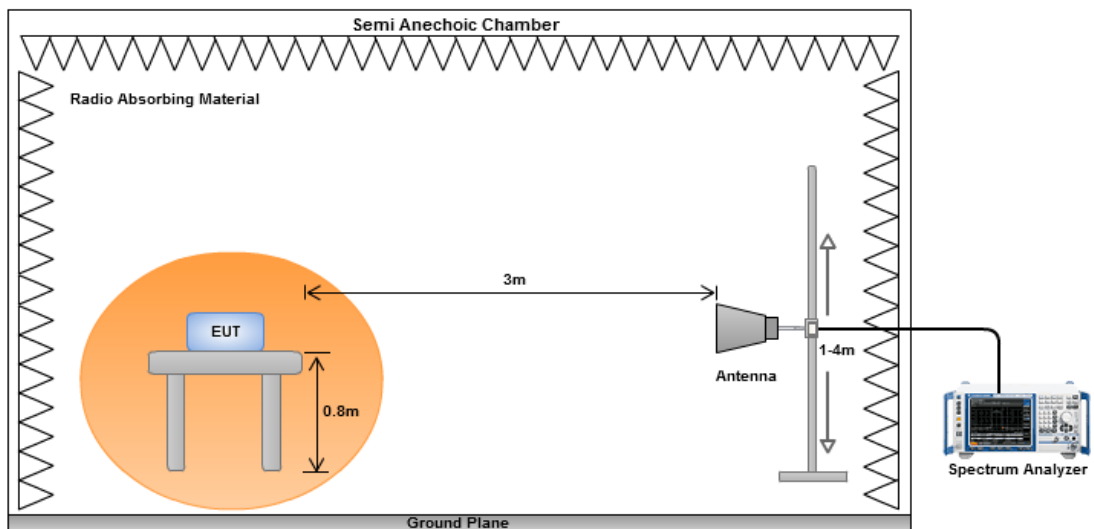



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Polarization	Horizontal		Test Freq. (MHz)	2440					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	44.55	24.18	40.00	-15.82	40.91	-16.73	Peak	---	---
2	98.87	27.09	43.50	-16.41	48.86	-21.77	Peak	---	---
3	231.76	37.46	46.00	-8.54	56.18	-18.72	Peak	---	---
4	298.69	31.02	46.00	-14.98	47.28	-16.26	Peak	---	---
5	565.44	28.56	46.00	-17.44	38.96	-10.40	Peak	---	---
6	798.24	27.39	46.00	-18.61	34.16	-6.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Polarization	Vertical	Test Freq. (MHz)	2440																																																															
<p>The graph displays the emission spectrum with a red step function representing the FCC CLASS-B limit. The y-axis is Level (dBuV/m) from 0 to 90, and the x-axis is Frequency (MHz) from 30 to 1000. Six peaks are marked with blue vertical lines and numbered 1 through 6.</p>																																																																		
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>44.55</td> <td>40.00</td> <td>-15.27</td> <td>41.46</td> <td>-16.73</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>98.87</td> <td>43.50</td> <td>-12.70</td> <td>52.57</td> <td>-21.77</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>232.73</td> <td>46.00</td> <td>-19.83</td> <td>44.82</td> <td>-18.65</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>564.47</td> <td>46.00</td> <td>-17.84</td> <td>38.58</td> <td>-10.42</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>638.19</td> <td>46.00</td> <td>-16.37</td> <td>38.84</td> <td>-9.21</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>797.27</td> <td>46.00</td> <td>-14.81</td> <td>37.98</td> <td>-6.79</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	44.55	40.00	-15.27	41.46	-16.73	Peak	---	---	2	98.87	43.50	-12.70	52.57	-21.77	Peak	---	---	3	232.73	46.00	-19.83	44.82	-18.65	Peak	---	---	4	564.47	46.00	-17.84	38.58	-10.42	Peak	---	---	5	638.19	46.00	-16.37	38.84	-9.21	Peak	---	---	6	797.27	46.00	-14.81	37.98	-6.79	Peak	---	---		
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																										
1	44.55	40.00	-15.27	41.46	-16.73	Peak	---	---																																																										
2	98.87	43.50	-12.70	52.57	-21.77	Peak	---	---																																																										
3	232.73	46.00	-19.83	44.82	-18.65	Peak	---	---																																																										
4	564.47	46.00	-17.84	38.58	-10.42	Peak	---	---																																																										
5	638.19	46.00	-16.37	38.84	-9.21	Peak	---	---																																																										
6	797.27	46.00	-14.81	37.98	-6.79	Peak	---	---																																																										
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																		



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

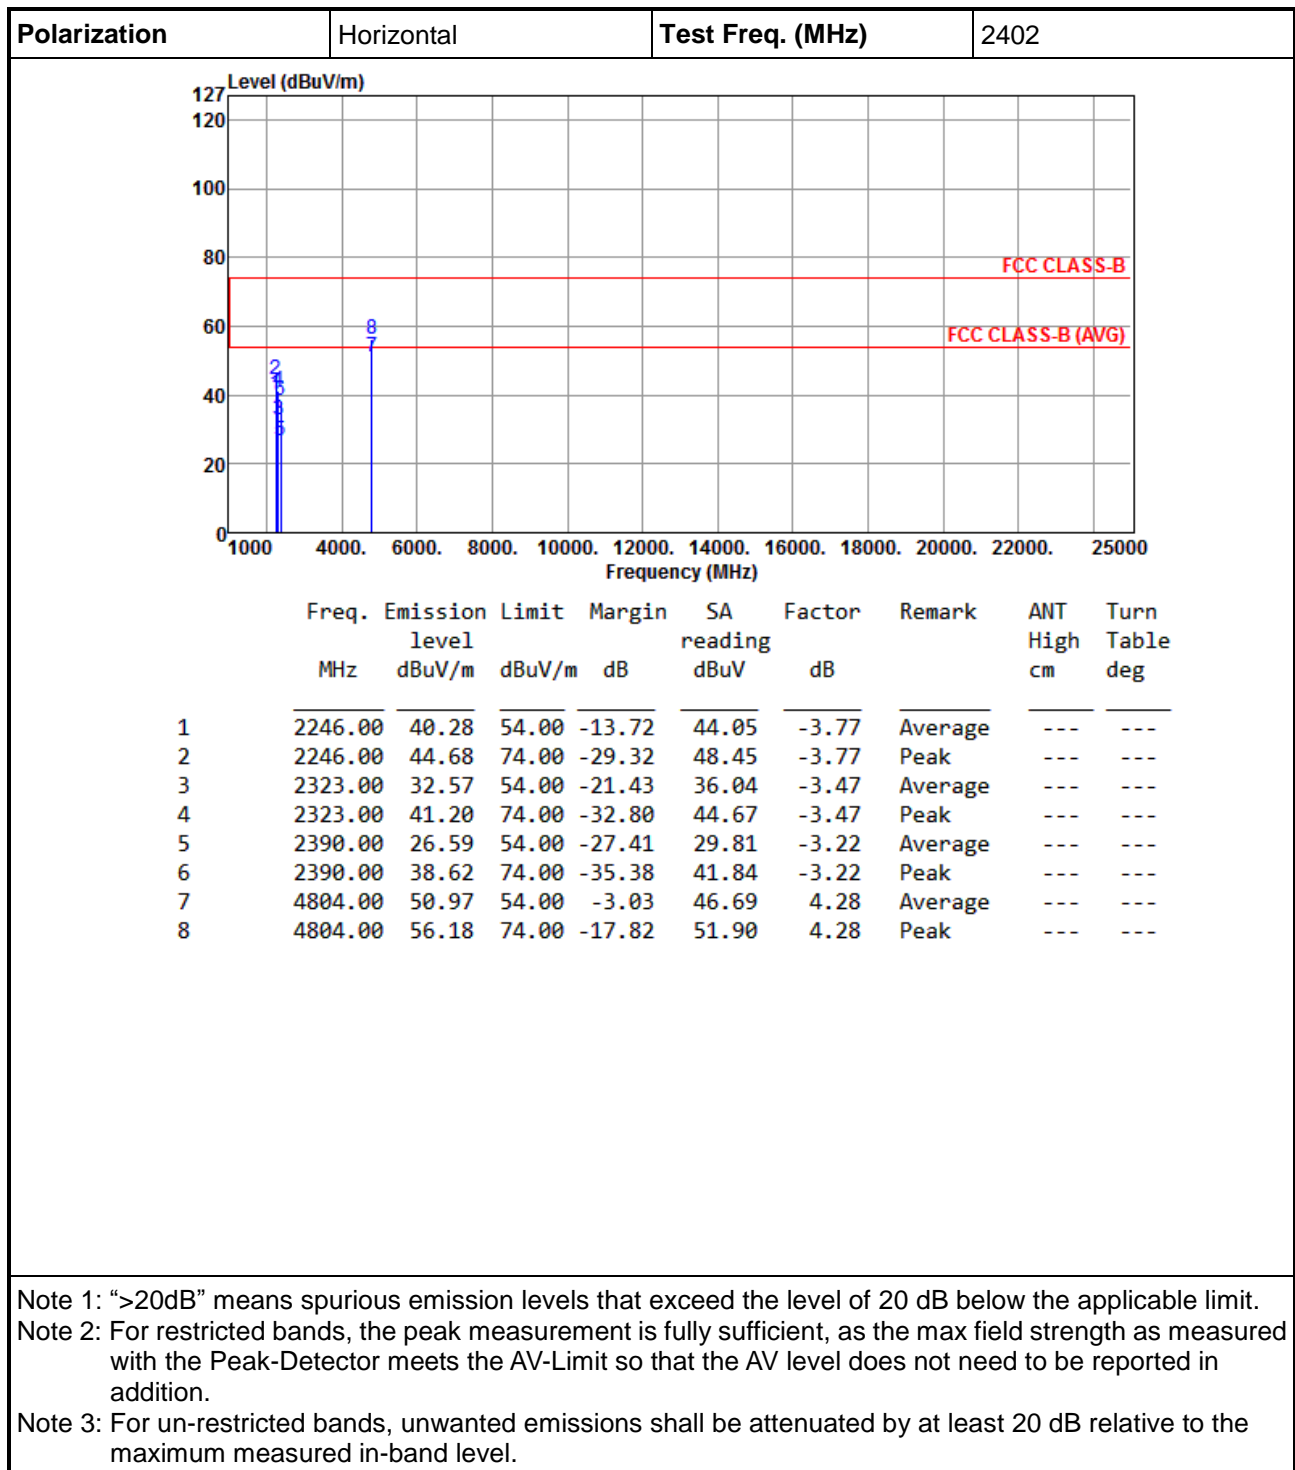




Polarization	Vertical	Test Freq. (MHz)	2402						
<p>The spectrum plot displays the emission levels in dBuV/m across a frequency range from 1000 to 25000 MHz. Two horizontal red lines indicate the FCC CLASS-B limit at approximately 74 dBuV/m and the FCC CLASS-B (AVG) limit at approximately 54 dBuV/m. Several peaks are visible, with the most prominent ones at 2246 MHz and 4804 MHz. The peak at 4804 MHz reaches a level of 52.64 dBuV/m, which is 21.36 dB below the 74 dBuV/m limit.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			
1	2246.00	35.35	54.00	-18.65	39.12	-3.77	Average	---	---
2	2246.00	42.13	74.00	-31.87	45.90	-3.77	Peak	---	---
3	2323.00	30.93	54.00	-23.07	34.40	-3.47	Average	---	---
4	2323.00	39.39	74.00	-34.61	42.86	-3.47	Peak	---	---
5	2390.00	25.95	54.00	-28.05	29.17	-3.22	Average	---	---
6	2390.00	38.97	74.00	-35.03	42.19	-3.22	Peak	---	---
7	4804.00	47.18	54.00	-6.82	42.90	4.28	Average	---	---
8	4804.00	52.64	74.00	-21.36	48.36	4.28	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>									



Polarization	Horizontal			Test Freq. (MHz)	2440				
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2284.00	44.08	54.00	-9.92	47.70	-3.62	Average	---	---
2	2284.00	50.94	74.00	-23.06	54.56	-3.62	Peak	---	---
3	2310.00	41.01	54.00	-12.99	44.54	-3.53	Average	---	---
4	2310.00	50.09	74.00	-23.91	53.62	-3.53	Peak	---	---
5	4880.00	50.46	54.00	-3.54	46.06	4.40	Average	---	---
6	4880.00	55.83	74.00	-18.17	51.43	4.40	Peak	---	---
7	7320.00	47.21	54.00	-6.79	38.28	8.93	Average	---	---
8	7320.00	56.10	74.00	-17.90	47.17	8.93	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>									



Polarization	Vertical	Test Freq. (MHz)	2440
---------------------	----------	-------------------------	------

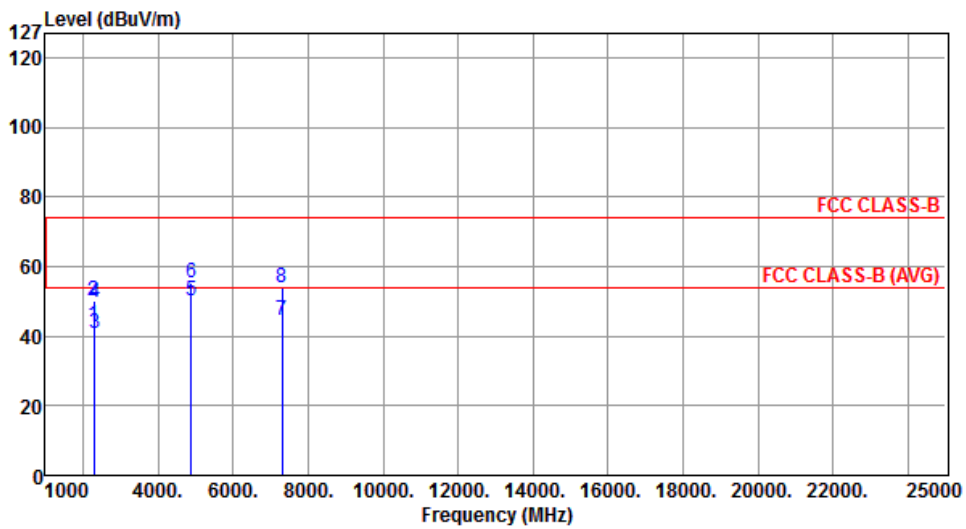

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2284.00	42.90	54.00	-11.10	46.52	-3.62	Average	---	---
2	2284.00	49.99	74.00	-24.01	53.61	-3.62	Peak	---	---
3	2310.00	40.79	54.00	-13.21	44.32	-3.53	Average	---	---
4	2310.00	49.74	74.00	-24.26	53.27	-3.53	Peak	---	---
5	4880.00	49.93	54.00	-4.07	45.53	4.40	Average	---	---
6	4880.00	55.35	74.00	-18.65	50.95	4.40	Peak	---	---
7	7320.00	44.63	54.00	-9.37	35.70	8.93	Average	---	---
8	7320.00	53.87	74.00	-20.13	44.94	8.93	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Polarization	Horizontal		Test Freq. (MHz)	2480					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2297.00	38.84	54.00	-15.16	42.42	-3.58	Average	---	---
2	2297.00	44.01	74.00	-29.99	47.59	-3.58	Peak	---	---
3	2323.00	45.95	54.00	-8.05	49.42	-3.47	Average	---	---
4	2323.00	49.28	74.00	-24.72	52.75	-3.47	Peak	---	---
5	2483.50	36.14	54.00	-17.86	38.97	-2.83	Average	---	---
6	2483.50	48.52	74.00	-25.48	51.35	-2.83	Peak	---	---
7	4960.00	49.79	54.00	-4.21	45.25	4.54	Average	---	---
8	4960.00	55.03	74.00	-18.97	50.49	4.54	Peak	---	---
9	7440.00	43.16	54.00	-10.84	34.04	9.12	Average	---	---
10	7440.00	53.63	74.00	-20.37	44.51	9.12	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>									



Polarization	Vertical	Test Freq. (MHz)	2480						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			
1	2297.00	36.15	54.00	-17.85	39.73	-3.58	Average	---	---
2	2297.00	42.56	74.00	-31.44	46.14	-3.58	Peak	---	---
3	2323.00	43.02	54.00	-10.98	46.49	-3.47	Average	---	---
4	2323.00	47.40	74.00	-26.60	50.87	-3.47	Peak	---	---
5	2483.50	30.52	54.00	-23.48	33.35	-2.83	Average	---	---
6	2483.50	42.44	74.00	-31.56	45.27	-2.83	Peak	---	---
7	4960.00	51.06	54.00	-2.94	46.52	4.54	Average	---	---
8	4960.00	56.12	74.00	-17.88	51.58	4.54	Peak	---	---
9	7440.00	46.33	54.00	-7.67	37.21	9.12	Average	---	---
10	7440.00	55.03	74.00	-18.97	45.91	9.12	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6 Emissions in non-restricted frequency bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level


3.6.4 Test Setup

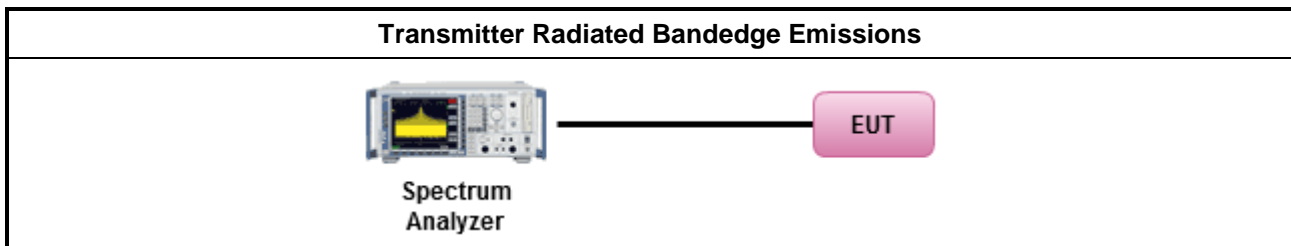



3.6.5 Test Result of Emissions in non-restricted frequency bands

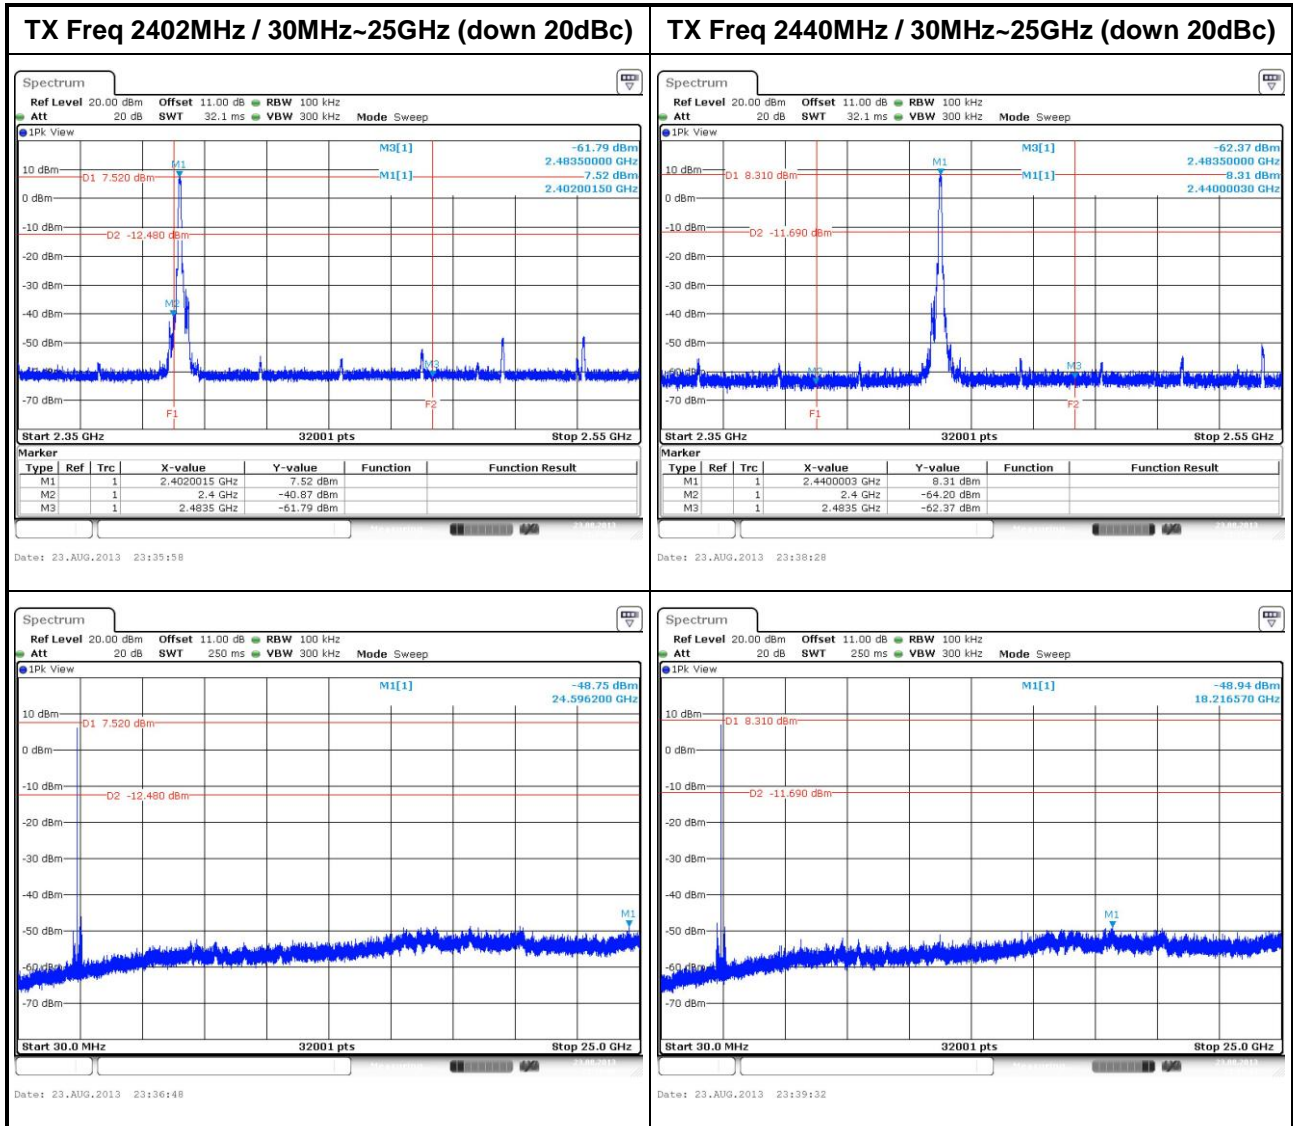

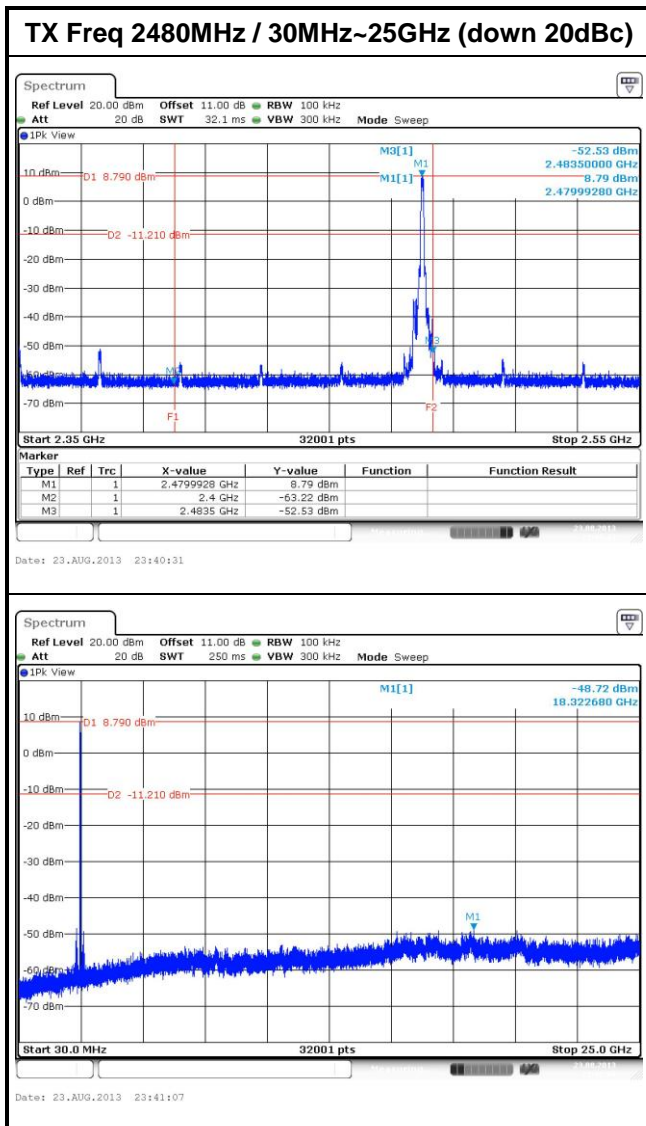

==END==