

FCC Test Report

FCC ID : K7T-RC3000A
Equipment : Cellular Modem
Model No. : RC3000A-E
Brand Name : Radicom
Applicant : Radicom Research, Inc.
Address : 2148 Bering Drive, San Jose, CA 95131 U.S.A
Standard : 47 CFR FCC Part 24 Subpart E
Received Date : Jul. 04, 2014
Tested Date : Jul. 21 ~ Sep. 15, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition and Location Information.....	10
2.2	The Worst Test Modes and Channel Details	10
3	TEST RESULTS.....	11
3.1	Equivalent Isotropically Radiated Power	11
3.2	Radiated Emissions.....	15
3.3	Conducted Emissions.....	20
3.4	Band Edge.....	23
3.5	Occupied Bandwidth	25
3.6	Peak to Average Ratio	28
3.7	Frequency Stability.....	30
4	TEST LABORATORY INFORMATION	32

Release Record

Report No.	Version	Description	Issued Date
FG470405-2	Rev. 01	Initial issue	Jun. 11, 2015

Summary of Test Results

FCC Rules	Test Items	Measured	Result
2.1046 / 24.232(c)	Equivalent Isotropically Radiated Power	Power[dBm] : GSM: 30.54 WCDMA: 24.80	Pass
2.1053 / 24.238(a)	Radiated Emissions	Meet the requirement of limit	Pass
2.1051 / 24.238(a)	Conducted Emissions	Meet the requirement of limit	Pass
2.1051 / 24.238(a)	Band Edge	Meet the requirement of limit	Pass
2.1049	Occupied Bandwidth	Meet the requirement of limit	Pass
24.232(d)	Peak to average ratio	Meet the requirement of limit	Pass
2.1055 / 24.235	Frequency Stability	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

Operating Band (MHz)	GSM: 1850.2-1909.8 WCDMA: 1852.4-1907.6
Modulation	GSM / GPRS: GMSK EDGE: 8-PSK WCDMA / HSDPA: QPSK
3GPP Release Version	R99 / R5
Multislot Class for GPRS / EDGE	12
DTM Multislot Class	5 / 9 / 11
UE Category	6
H/W Version	B7
S/W Version	SIM5320A_V1.5_B11V02

1.1.2 Maximum EIRP, Frequency Tolerance and Emission Designator

System	Modulation	Maximum EIRP(W)	Frequency Tolerance (ppm)	Emission Designator
GSM 1900	GMSK	1.132	0.037	245KGXW
WCDMA 1900	QPSK	0.302	0.042	4M28F9W

1.1.3 Antenna Details

Ant. No.	Type	Brand	Model	Gain (dBi)	Connector	Remarks
1	Dipole	NEW PREMIER	NP-56-5	1.5	RPSMA	---

1.1.4 EUT Operational Condition

Supply Voltage	5Vdc from AC adapter		
Operational Voltage	<input checked="" type="checkbox"/> Vnom (120 V)	<input checked="" type="checkbox"/> Vmax (138 V)	<input checked="" type="checkbox"/> Vmin (102 V)
Operational Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (80°C)	<input checked="" type="checkbox"/> Tmin (-30°C)

1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand Name: AC ADAPTER
		Model Name: HNEA05200UU
		I/P: 100~240Vac, 50/60Hz, 0.35A
		O/P: 5Vdc, 2.0A
2	RS232 cable	0.13m non-shielded cable
3	USB Y cable	1m shielded cable
4	GPS antenna	5m RF cable Brand: Brito Model: GP1FP-GAP300

1.1.6 Operating Channel List


GSM & GPRS		
	Channel	Frequency (MHz)
Low	512	1850.2
Middle	661	1880.0
High	810	1909.8

WCDMA		
	Channel	Frequency (MHz)
Low	9262	1852.4
Middle	9400	1880.0
High	9538	1907.6

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Earphone	PHILIPS	GB14471-93	---	1.2m non-shielded w/o core
2	Microphone	UIO	M109001	---	1.5m non-shielded w/o core
3	Notebook	DELL	Latitude E6440	DoC	---

1.3 Test Setup Chart

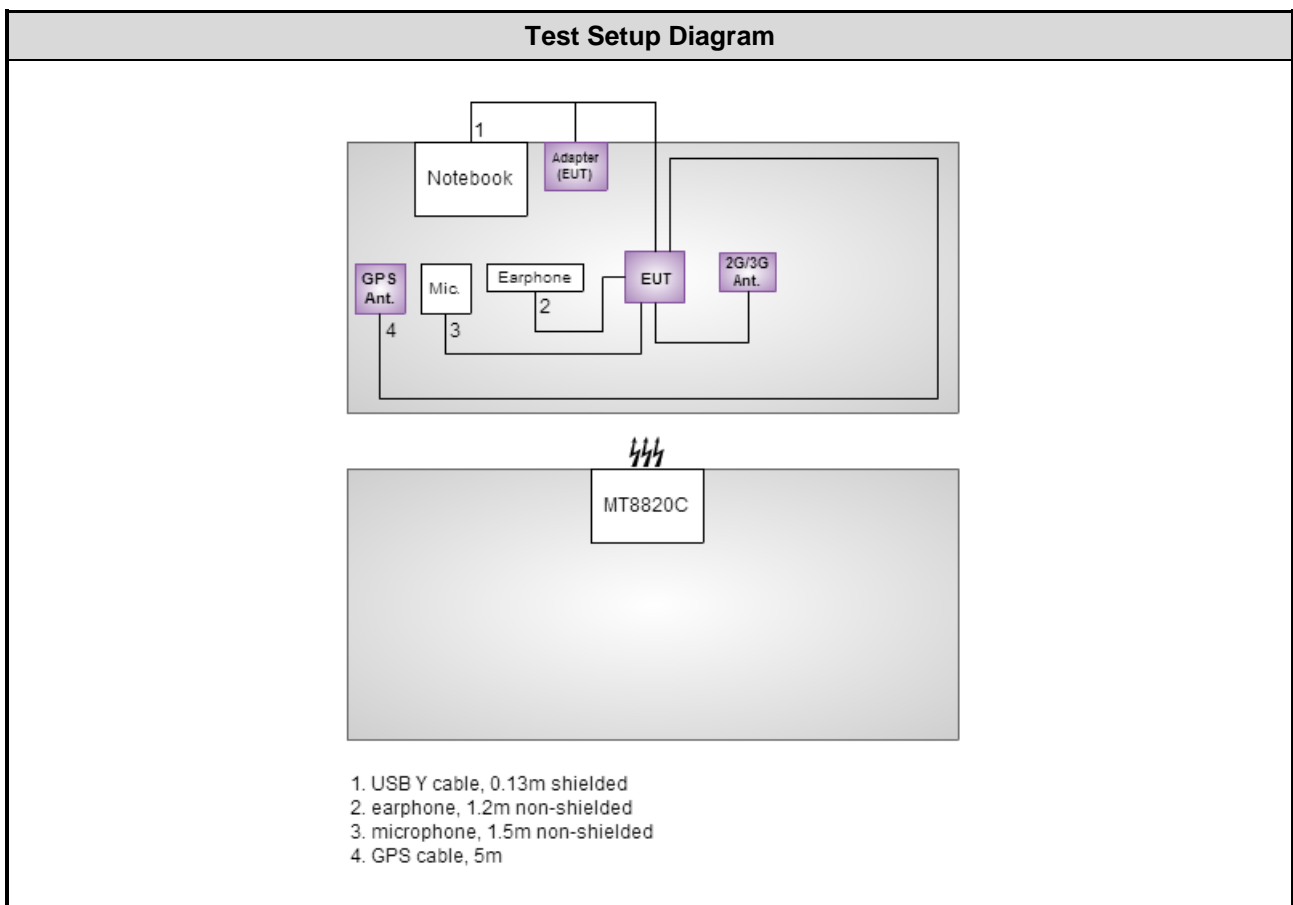

1.4 The Equipment List

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014
Radio Communication Analyzer	Anritsu	MT8820C	6201240341	Mar. 18, 2014	Mar. 17, 2015
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
--------------	-----	---------	--------	---------------	---------------

Note: Calibration Interval of instruments listed above is two year.

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards.

47 CFR FCC Part 24 Subpart E

ANSI C63.4-2003

ANSI / TIA / EIA-603-C -2004

FCC KDB 971168 D01 Power Meas License Digital Systems v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Frequency error	±34.134 Hz
Temperature	±0.6 °C
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.26 dB
Radiated emission > 1GHz	±4.94 dB

2 Test Configuration

2.1 Testing Condition and Location Information

Test Item	Test Site	Ambient Condition	Tested By
RF conducted	TH01-WS	22°C / 63%	Felix Sung
Radiated Emissions	03CH01-WS	22°C / 69%	Anderson Hung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test channel
E.I.R.P	GSM WCDMA	512, 661, 810 9262, 9400, 9538
Radiated Emission ≤ 1GHz	GSM WCDMA	661 9400
Radiated Emission > 1GHz	GSM WCDMA	512, 661, 810 9262, 9400, 9538
Conducted Emissions	GSM WCDMA	512, 661, 810 9262, 9400, 9538
Band Edge	GSM WCDMA	512, 810 9262, 9538
Occupied Bandwidth	GSM WCDMA	512, 661, 810 9262, 9400, 9538
Peak to average ratio	GSM WCDMA	512, 661, 810 9262, 9400, 9538
Frequency Stability	GSM WCDMA	661 9400

3 Test Results

3.1 Equivalent Isotropically Radiated Power

3.1.1 Limit of Equivalent Isotropically Radiated Power

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 Test Procedures


1. The EUT links up with simulator and is set to maximum output power level at low / middle / high channel. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.
4. After finding the max radiated emission, substitution method will be used for getting effective radiated power. EUT will be removed and substitution antenna will be placed at same position. Signal generator will output CW signal to substitution antenna through a RF cable. Rotate turntable and move antenna to find maximum radiated emission. Adjust output power of signal generator to let the maximum radiated emission is same as step 3. Record the output power level.
5. E.I.R.P = output power of step 4 + gain of substitution antenna – cable loss of RF cable.

For Conducted power measurement


1. The EUT links up with simulator and is set to maximum output power level at low / middle / high channel.
2. Measure the output power of low / middle / high channel of the EUT

3.1.3 Test Setup

Equivalent Isotropically Radiated Power Measurement

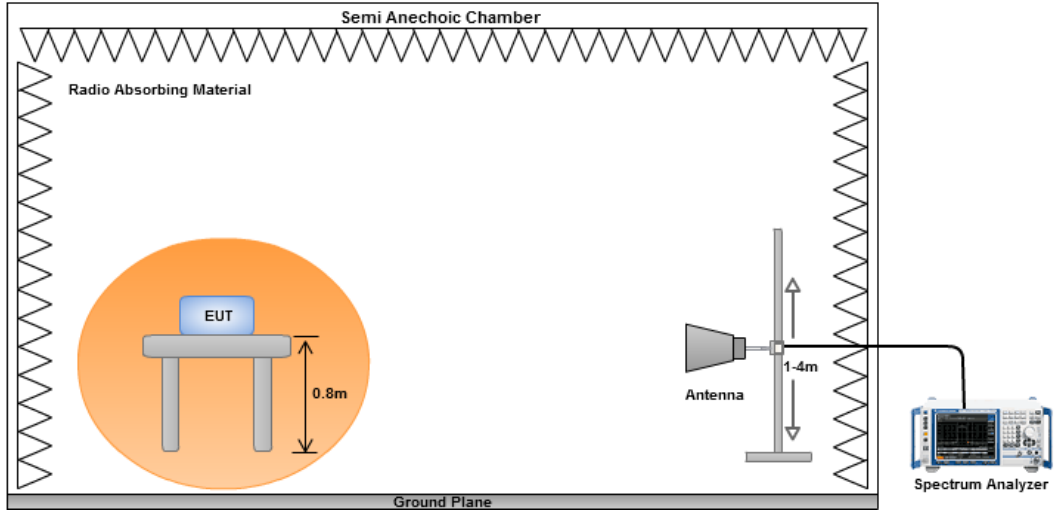

Conducted Power Measurement



3.1.4 Test Result of Conducted power (dBm)

Band		GSM 1900		
Channel		512	661	810
Frequency (MHz)		1850.2	1880	1909.8
GSM		28.63	28.96	29.32
GPRS 8 (GMSK, 1 Uplink slot)		28.43	28.78	29.03
GPRS 10(GMSK, 2 Uplink slots)		26.91	27.23	27.34
GPRS 11(GMSK, 3 Uplink slots)		24.92	25.21	25.31
GPRS 12(GMSK, 4 Uplink slots)		26.83	27.08	27.18
DTM 5 (2 Uplink Slots)	GSM (1 Uplink slot)	26.66	27.04	27.16
	GPRS (1 Uplink slot)	26.62	26.89	27.08
DTM 9 (2 Uplink Slots)	GSM (1 Uplink slot)	26.63	27.01	27.09
	GPRS (1 Uplink slot)	26.58	26.91	27.03
DTM 11 (3 Uplink Slots)	GSM (1 Uplink slot)	24.78	25.06	25.19
	GPRS (2 Uplink slots)	24.69	25.03	25.13
EDGE 8 (8PSK, 1 Uplink slot)		23.98	24.31	24.39
EDGE 10 (8PSK, 2 Uplink slots)		23.98	24.24	24.30
EDGE 11 (8PSK, 3 Uplink slots)		22.99	23.20	23.36
EDGE 12 (8PSK, 4 Uplink slots)		21.81	22.21	22.28
DTM 5 (2 Uplink Slots)	GSM (1 Uplink slot)	26.54	26.86	26.99
	EGPRS (1 Uplink slot)	23.72	24.07	24.12
DTM 9 (2 Uplink Slots)	GSM (1 Uplink slot)	26.51	26.81	26.94
	EGPRS (1 Uplink slot)	23.08	24.00	24.05
DTM 11 (3 Uplink Slots)	GSM (1 Uplink slot)	24.69	25.01	25.07
	EGPRS (2 Uplink slots)	22.71	23.07	23.14

Band	WCDMA 1900		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	22.91	23.08	22.77
HSDPA Subtest-1	22.89	23.07	22.69
HSDPA Subtest-2	22.80	23.04	22.67
HSDPA Subtest-3	22.58	23.02	22.70
HSDPA Subtest-4	22.73	23.07	22.73

3.1.5 Test Result of Equivalent Isotropically Radiated Power (dBm)

Mode	GSM						
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
512	1850.2	30.33	33.00	-2.67	-8.67	24.67	5.66
661	1880.0	30.54	33.00	-2.46	-8.73	24.79	5.75
810	1909.8	29.75	33.00	-3.25	-9.79	23.90	5.85

Note: EIRP = S.G Power value + Correction factor

Mode	WCDMA						
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
9262	1852.4	24.07	33.00	-8.93	-14.95	18.40	5.67
9400	1880.0	24.80	33.00	-8.20	-14.47	19.05	5.75
9538	1907.6	24.47	33.00	-8.53	-15.05	18.63	5.84

Note: EIRP = S.G Power value + Correction factor

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.
4. After finding the max radiated emission, substitution method will be used for getting effective radiated power. EUT will be removed and substitution antenna will be placed at same position. Signal generator will output CW signal to substitution antenna through a RF cable. Rotate turntable and move antenna to find maximum radiated emission. Adjust output power of signal generator to let the maximum radiated emission is same as step 3. Record the output power level.
5. E.I.R.P = output power of step 4 + gain of substitution antenna – cable loss of RF cable.

3.2.3 Test Setup

Radiated Emissions below 1 GHz

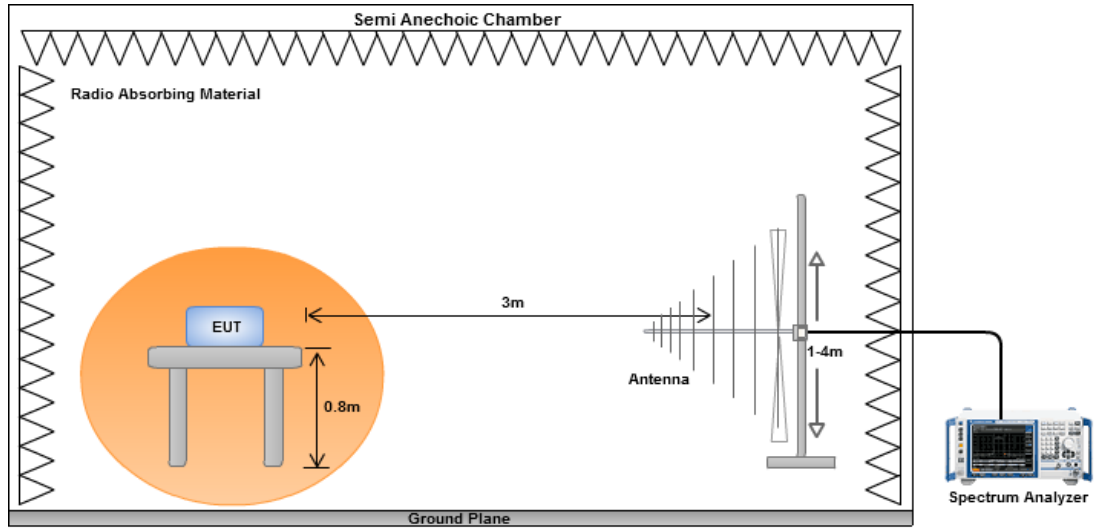

Radiated Emissions above 1 GHz

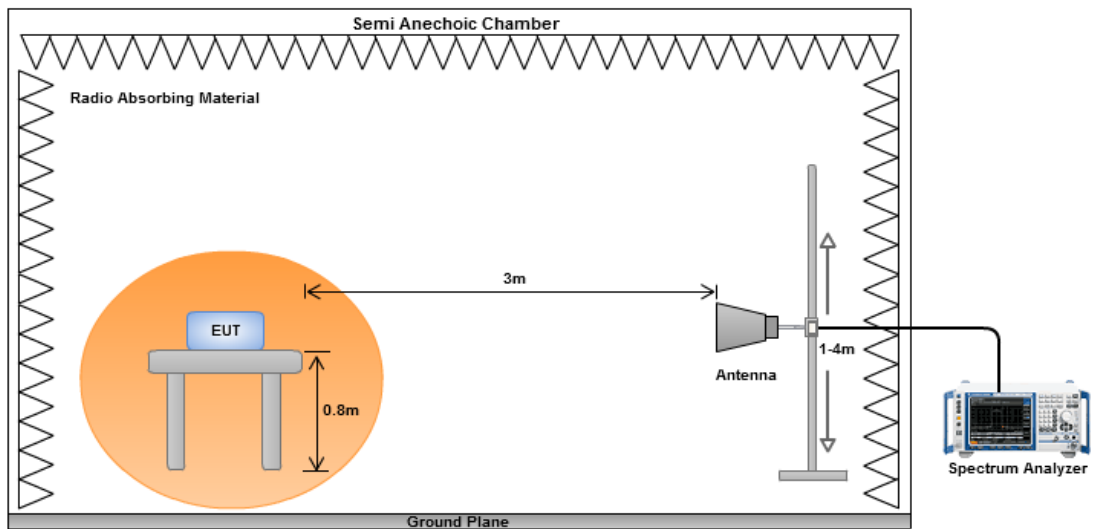

3.2.4 Test Result of Radiated Emissions below 1GHz

Mode		GSM, Channel : 661					
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
134.76	H	-58.36	-13.00	-45.36	-49.07	-57.18	-1.18
173.56	H	-58.03	-13.00	-45.03	-48.04	-59.19	1.16
288.02	H	-61.68	-13.00	-48.68	-51.76	-65.92	4.24
326.82	H	-60.89	-13.00	-47.89	-53.03	-65.21	4.32
414.12	H	-63.27	-13.00	-50.27	-57.15	-67.50	4.23
738.10	H	-54.82	-13.00	-41.82	-54.04	-58.30	3.48
48.43	V	-61.81	-13.00	-48.81	-51.75	-50.69	-11.12
99.84	V	-63.95	-13.00	-50.95	-53.50	-64.22	0.27
134.76	V	-61.87	-13.00	-48.87	-54.63	-60.69	-1.18
173.56	V	-62.07	-13.00	-49.07	-55.30	-63.23	1.16
600.36	V	-62.58	-13.00	-49.58	-62.40	-66.37	3.79
738.10	V	-58.84	-13.00	-45.84	-59.32	-62.32	3.48

Mode		WCDMA, Channel : 9400					
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
44.55	H	-65.40	-13.00	-52.40	-63.28	-53.76	-11.64
134.76	H	-60.48	-13.00	-47.48	-51.19	-59.30	-1.18
173.56	H	-59.22	-13.00	-46.22	-49.23	-60.38	1.16
288.02	H	-61.31	-13.00	-48.31	-51.39	-65.55	4.24
416.06	H	-63.53	-13.00	-50.53	-57.45	-67.76	4.23
738.10	H	-55.87	-13.00	-42.87	-55.09	-59.35	3.48
48.43	V	-63.29	-13.00	-50.29	-53.23	-52.17	-11.12
94.99	V	-62.29	-13.00	-49.29	-51.54	-62.66	0.37
123.12	V	-59.56	-13.00	-46.56	-52.06	-58.75	-0.81
159.01	V	-58.35	-13.00	-45.35	-52.08	-57.47	-0.88
415.09	V	-65.98	-13.00	-52.98	-60.23	-70.21	4.23
600.36	V	-61.95	-13.00	-48.95	-61.77	-65.74	3.79

Note: EIRP = S.G Power value + Correction factor

3.2.5 Test Result of Radiated Emissions above 1GHz

Mode	GSM , Channel : 512						
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
3700.40	H	-29.35	-13.00	-16.35	-41.95	-35.93	6.58
5550.60	H	-29.49	-13.00	-16.49	-46.75	-35.37	5.88
7400.80	H	-44.22	-13.00	-31.22	-66.07	-47.09	2.87
3700.40	V	-30.43	-13.00	-17.43	-42.53	-37.01	6.58
5550.60	V	-30.54	-13.00	-17.54	-46.30	-36.42	5.88
7400.80	V	-43.90	-13.00	-30.90	-63.89	-46.77	2.87

Mode	GSM , Channel : 661						
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
3760.00	H	-29.52	-13.00	-16.52	-42.34	-36.10	6.58
5640.00	H	-30.94	-13.00	-17.94	-48.42	-36.79	5.85
7520.00	H	-44.74	-13.00	-31.74	-66.25	-47.70	2.96
3760.00	V	-33.06	-13.00	-20.06	-45.13	-39.64	6.58
5640.00	V	-34.32	-13.00	-21.32	-50.37	-40.17	5.85
7520.00	V	-43.27	-13.00	-30.27	-63.66	-46.23	2.96

Mode	GSM , Channel : 810						
Frequency (MHz)	Antenna Polarity.	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
3819.60	H	-33.60	-13.00	-20.60	-46.61	-40.16	6.56
5729.40	H	-32.88	-13.00	-19.88	-50.43	-38.69	5.81
7639.20	H	-45.01	-13.00	-32.01	-66.18	-47.88	2.87
3819.60	V	-34.26	-13.00	-21.26	-46.39	-40.82	6.56
5729.40	V	-36.85	-13.00	-23.85	-53.38	-42.66	5.81
7639.20	V	-43.16	-13.00	-30.16	-63.66	-46.03	2.87

Note: EIRP = S.G Power value + Correction factor

Mode	WCDMA , Channel : 9262						
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
3704.80	H	-47.43	-13.00	-34.43	-60.04	-54.01	6.58
5557.20	H	-47.13	-13.00	-34.13	-64.42	-53.01	5.88
7409.60	H	-49.81	-13.00	-36.81	-71.63	-52.69	2.88
3704.80	V	-50.32	-13.00	-37.32	-62.42	-56.90	6.58
5557.20	V	-54.31	-13.00	-41.31	-70.08	-60.19	5.88
7409.60	V	-53.22	-13.00	-40.22	-73.24	-56.10	2.88

Mode	WCDMA , Channel : 9400						
Frequency (MHz)	Antenna Polarity	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
3760.00	H	-47.97	-13.00	-34.97	-60.79	-54.55	6.58
5640.00	H	-47.72	-13.00	-34.72	-65.20	-53.57	5.85
7520.00	H	-49.27	-13.00	-36.27	-70.78	-52.23	2.96
3760.00	V	-50.86	-13.00	-37.86	-62.93	-57.44	6.58
5640.00	V	-54.97	-13.00	-41.97	-71.02	-60.82	5.85
7520.00	V	-52.89	-13.00	-39.89	-73.28	-55.85	2.96

Mode	WCDMA , Channel : 9538						
Frequency (MHz)	Antenna Polarity.	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Vaule (dBm)	Correction Factor (dB)
3815.20	H	-47.23	-13.00	-34.23	-60.23	-53.79	6.56
5722.80	H	-47.37	-13.00	-34.37	-64.91	-53.18	5.81
7630.40	H	-48.88	-13.00	-35.88	-70.09	-51.78	2.90
3815.20	V	-50.46	-13.00	-37.46	-62.57	-57.02	6.56
5722.80	V	-54.37	-13.00	-41.37	-70.87	-60.18	5.81
7630.40	V	-52.65	-13.00	-39.65	-73.20	-55.55	2.90

Note: EIRP = S.G Power value + Correction factor

3.3 Conducted Emissions


3.3.1 Limit of Conducted Emissions

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.


3.3.2 Test Procedures


1. Lowest, middle and highest operating channels are tested for this item.
2. Scan frequency range is from 30MHz~19.1GHz.
3. Set RBW = 1MHz, VBW = 3MHz, detector = Peak, sweep time = auto.
4. Record the max trace value and capture the test plot of each sub frequency band.

3.3.3 Test Setup

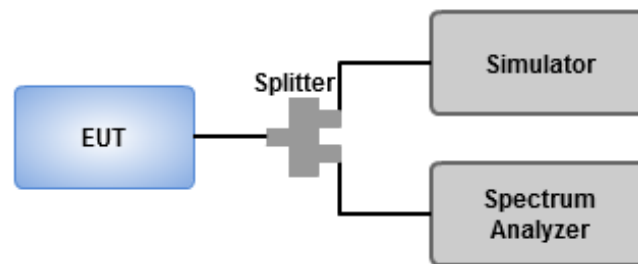

3.3.4 Test Result of Conducted Emissions

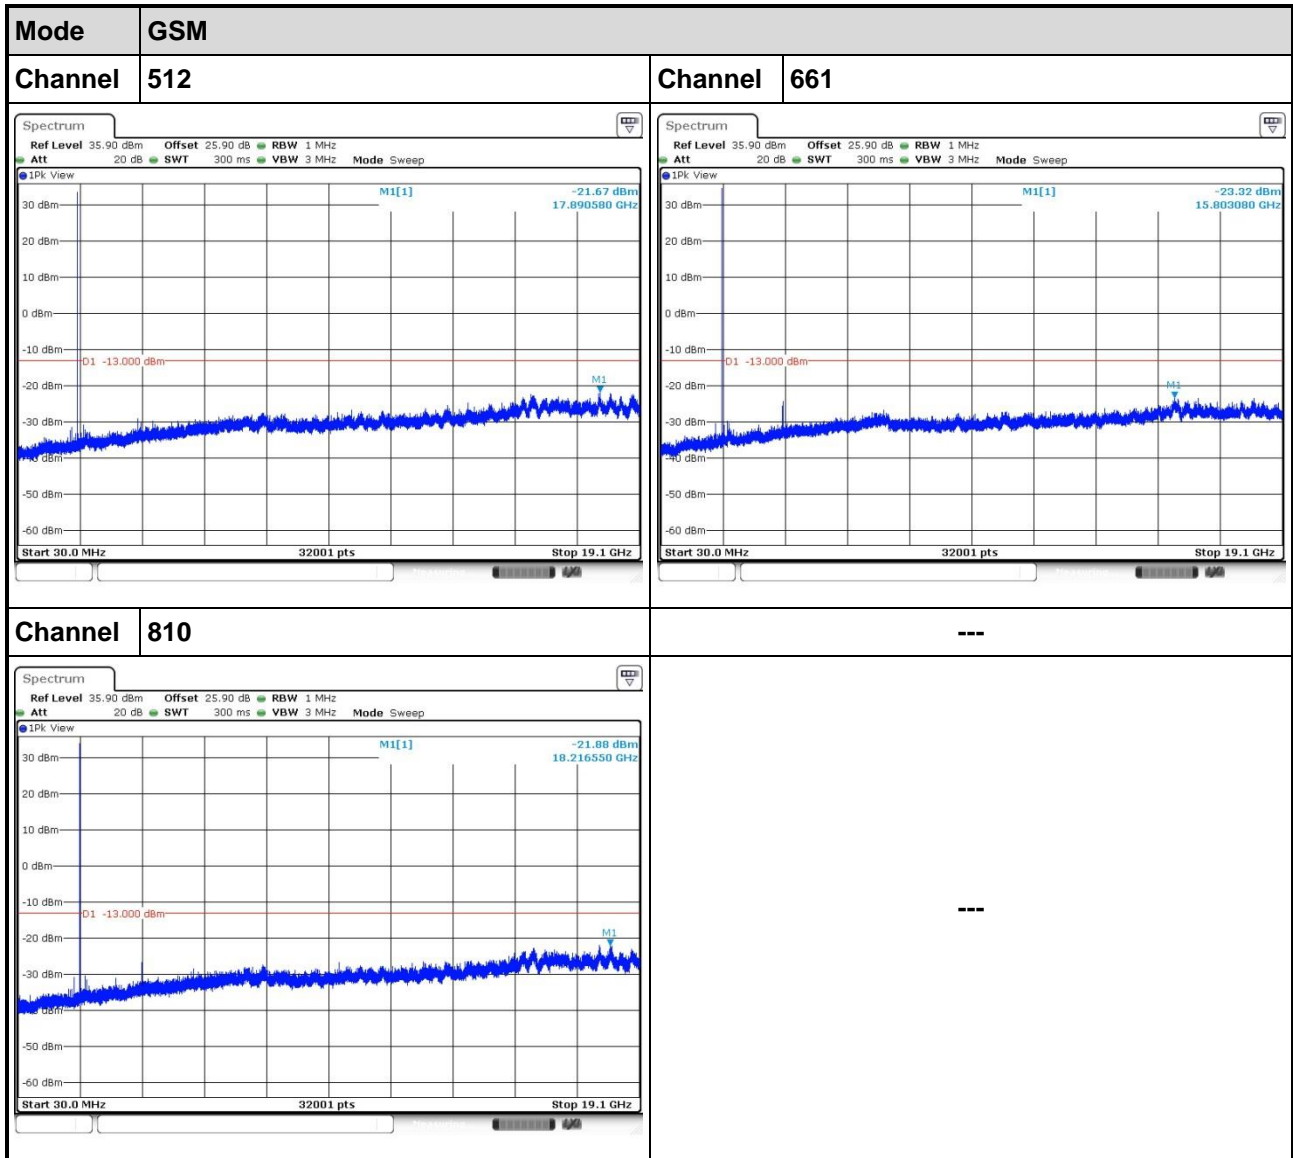

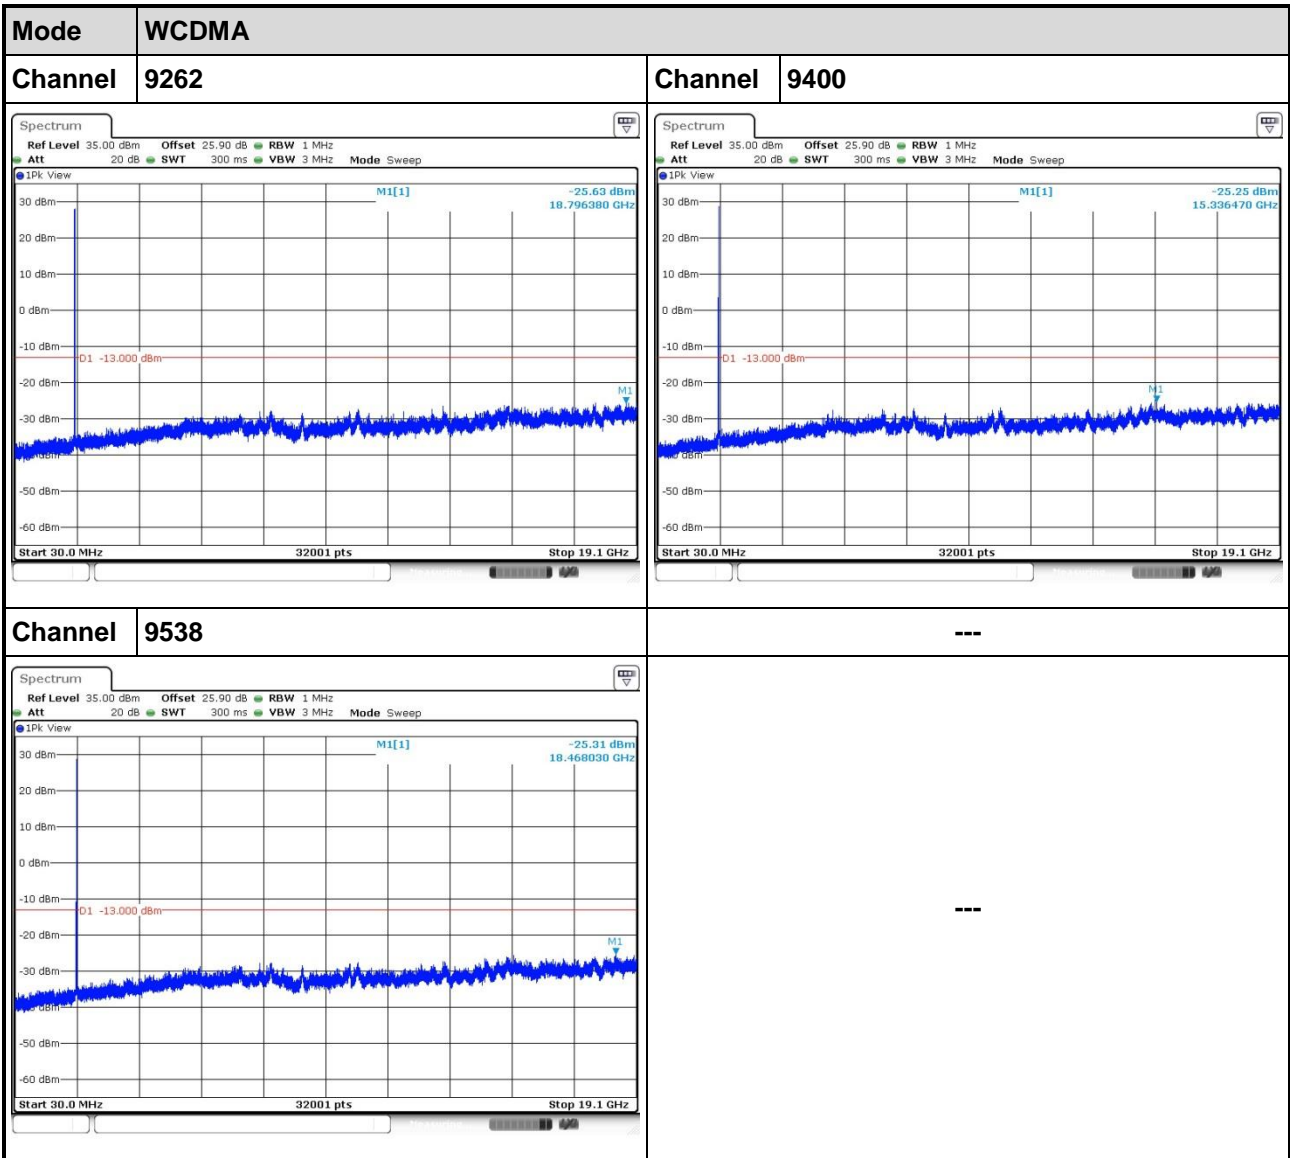

3.4 Band Edge


3.4.1 Limit of Band Edge

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.



3.4.2 Test Procedures

1. Lowest and highest operating channels are tested for this item.
2. The center frequency of spectrum analyzer will be set to 1850 and 1910 MHz.
3. Set RBW = VBW=3kHz, span = 1 MHz, detector = RMS, sweep time = auto for GSM
Set RBW = VBW = 300kHz, span = 5 MHz, detector = RMS, sweep time = auto for WCDMA
4. Record the max trace value and capture the test plot.

3.4.3 Test Setup

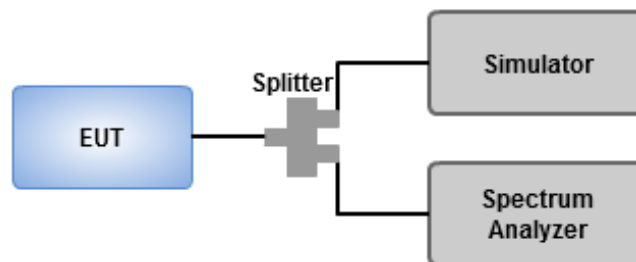

3.4.4 Test Result of Band Edge

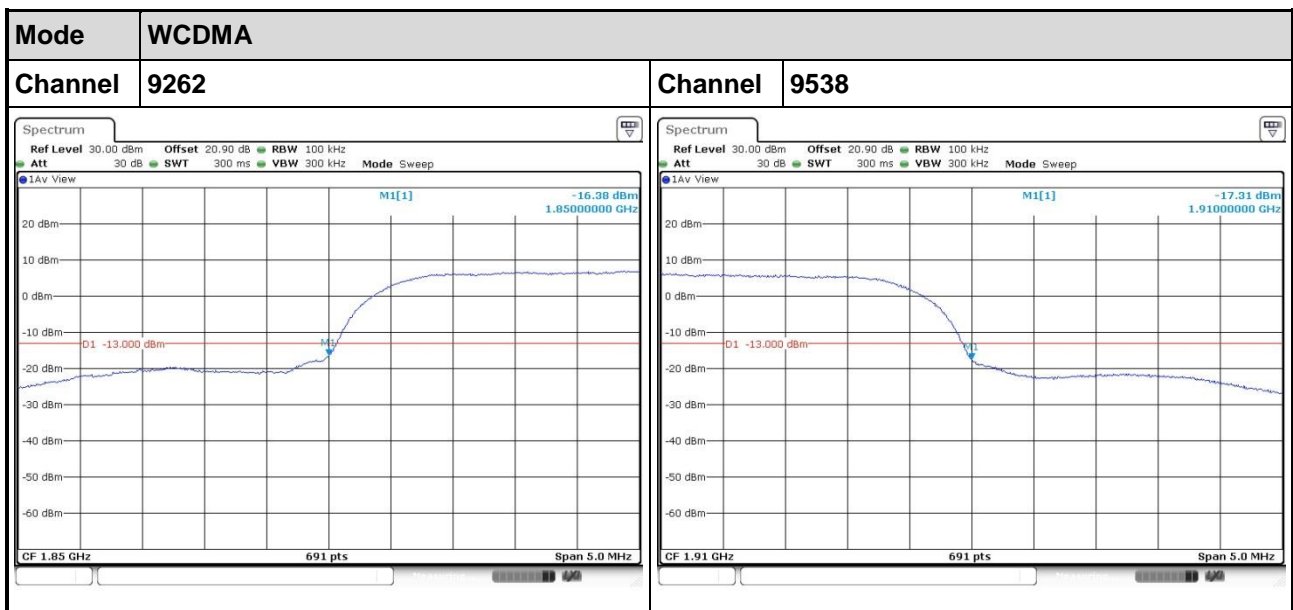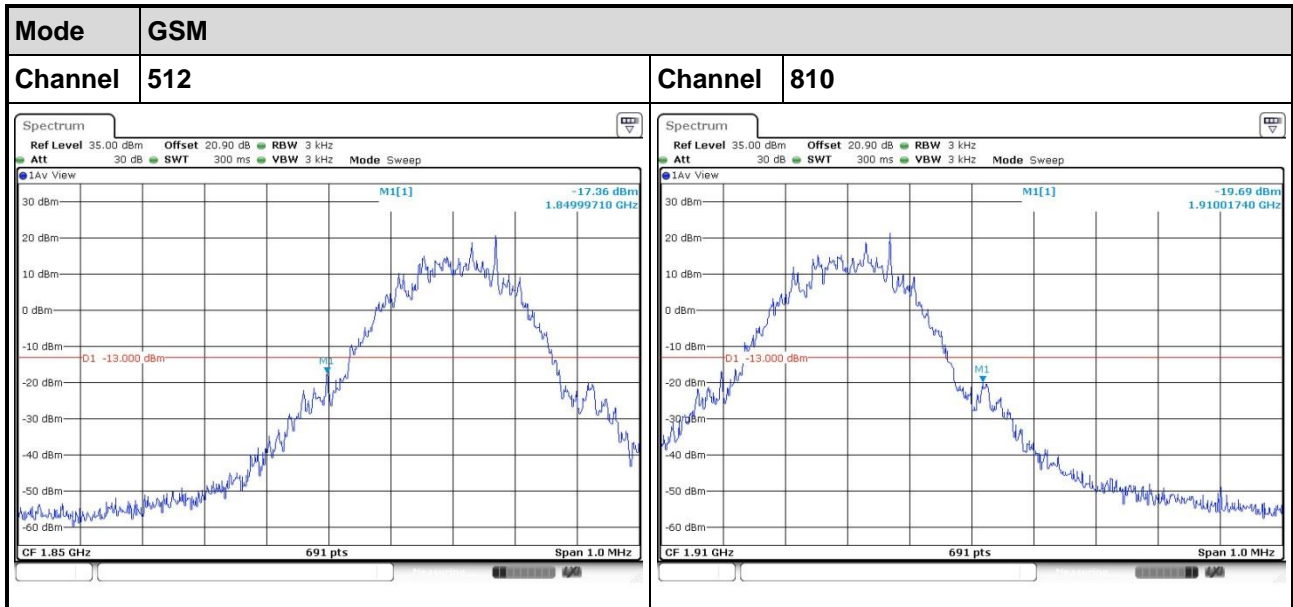


3.5 Occupied Bandwidth

3.5.1 Test Procedures


1. Set resolution bandwidth (RBW) = 10 kHz, Video bandwidth = 30 kHz for GSM mode.
Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz for WCDMA mode.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Using occupied bandwidth measurement function of spectrum analyzer to measure occupied bandwidth.

3.5.2 Test Setup

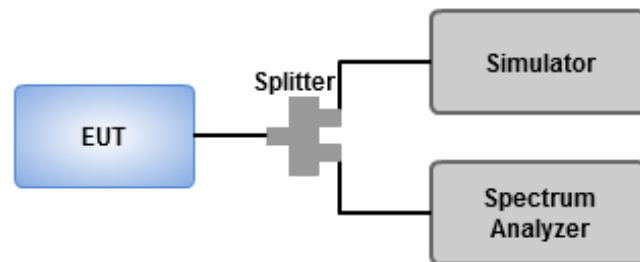


3.5.3 Test Result of Occupied Bandwidth

MODE	Channel	Frequency (MHz)	26dB BW (kHz)	99% OBW (kHz)
GSM	512	1850.2	304.35	244.57
GSM	661	1880.0	304.35	244.57
GSM	810	1909.8	305.80	240.23

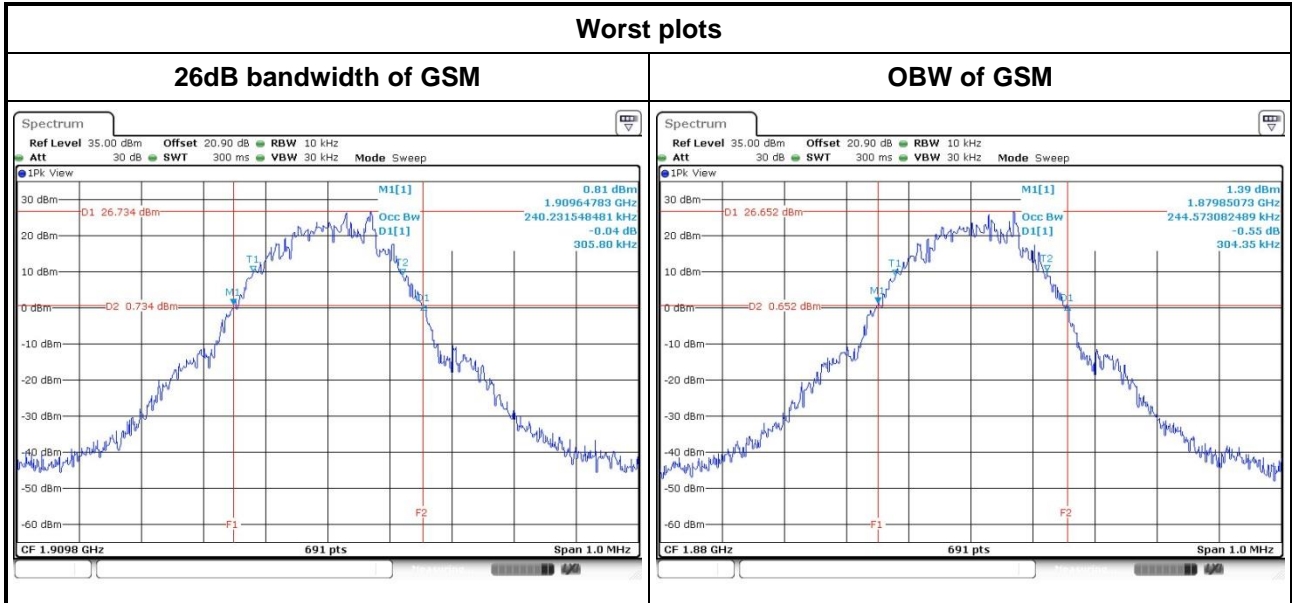

MODE	Channel	Frequency (MHz)	OBW (MHz)	26dB BW (MHz)
WCDMA	9262	1852.4	4.21	4.72
WCDMA	9400	1880.0	4.20	4.72
WCDMA	9538	1907.6	4.28	5.94

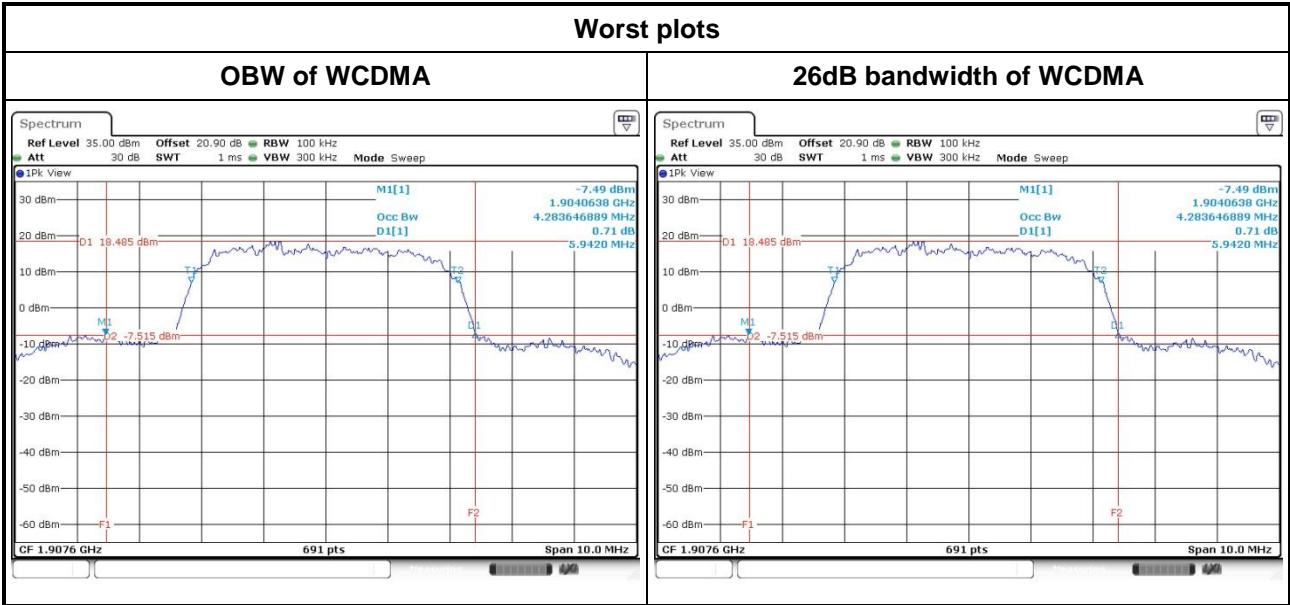

3.6 Peak to Average Ratio

3.6.1 Limit of Peak to Average Ratio

Peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

3.6.2 Test Procedures


For GSM mode

1. Set RBW=1MHz, RBW=3MHz, Peak detector in Trace 1
2. Set RBW=1MHz, RBW=3MHz, RMs detector in Trace 2
3. Trigger function is enabled for measuring signal at burst on time. Measure the difference between trace1 and trace 2.

For WCDMA mode


1. Enable CCDF function of spectrum analyzer and set RBW=10MHz
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.6.3 Test Setup

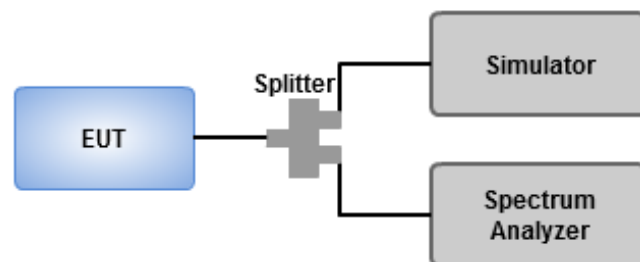

3.6.4 Test Result of Peak to Average ratio

MODE	Channel	Frequency (MHz)	Peak to Average ratio (dB)
GSM	512	1850.2	0.01
GSM	661	1880.0	0.02
GSM	810	1909.8	0.01
WCDMA	9262	1852.4	1.30
WCDMA	9400	1880.0	1.74
WCDMA	9538	1907.6	1.54

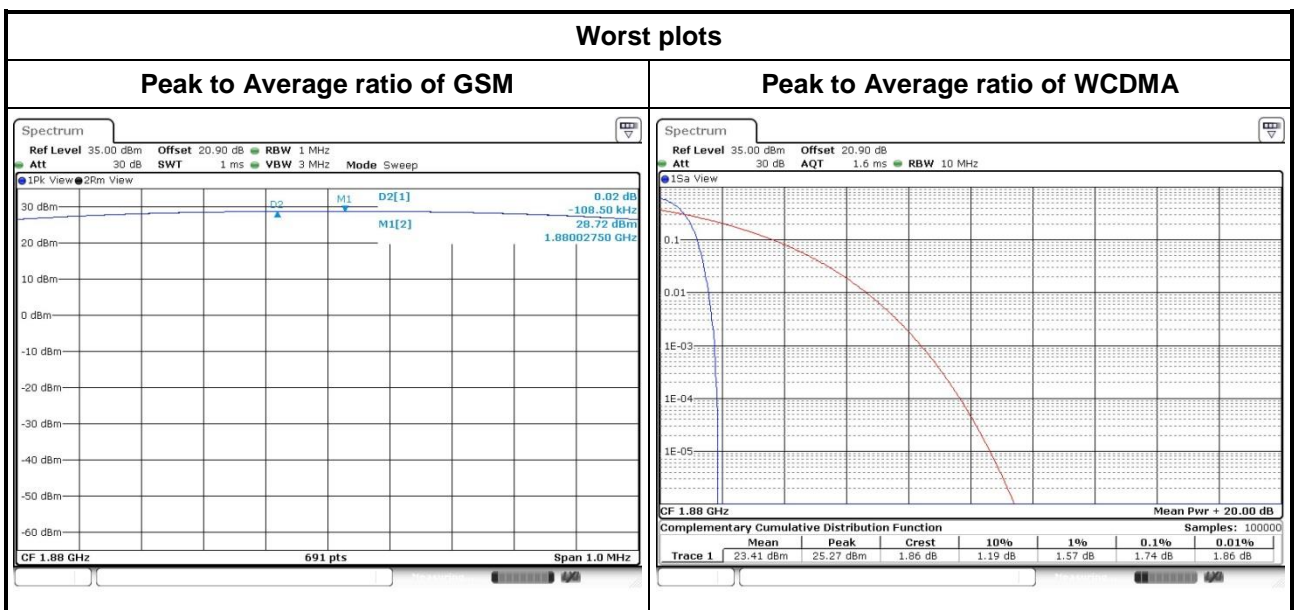

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -30~50°C and voltage range is from lowest to highest working voltage.
4. Tem Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

3.7.3 Test Setup

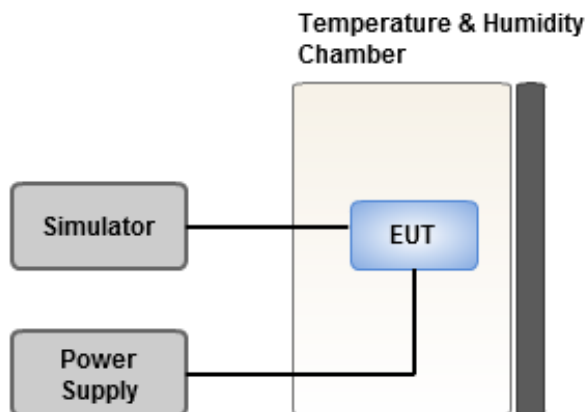

3.7.4 Test Result of Frequency Stability

Temperature (°C)	Voltage (ac)	Frequency Drift (ppm)		Limit (ppm)
		GSM	WCDMA	
80	120	-0.033	-0.042	2.5
70	120	-0.035	-0.039	2.5
60	120	-0.035	-0.035	2.5
50	120	-0.037	-0.041	2.5
40	120	-0.034	-0.037	2.5
30	120	-0.036	-0.033	2.5
20	120	-0.037	-0.042	2.5
10	120	-0.033	-0.039	2.5
0	120	-0.035	-0.031	2.5
-10	120	-0.037	-0.026	2.5
-20	120	-0.032	-0.019	2.5
-30	120	-0.032	-0.027	2.5
20	138	-0.035	-0.039	2.5
20	102	-0.036	-0.038	2.5

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao
Yuan Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao
Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==