

Maximum Permissible Exposure (MPE) Evaluation Report

Report No. : TS11050008-EME
Model No. : WiFiHU-a, WiFiHU-a-1-NE,
WiFiHU-c, WiFiHU-c-1-NE
Issued Date : Jun. 08, 2011

Applicant: Radicom Research Inc.
2148 Bering Dr., San Jose, CA. 95131, USA

Test Method/ Standard: FCC 1.1310

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

The test report was prepared by: Sign on File
Jill Chen / Assistant

These measurements were taken by: Sign on File
Terry Hsu / Engineer

The test report was reviewed by:

Name Jimmy Yang
Title Engineer



Table of Contents

Summary of Tests	3
1. Introduction	4
2. RF Exposure Limit	4
3. RF Exposure calculations	5
4 Description of EUT	6
5. Test results	8



Summary of Tests

MPE Evaluation meet FCC OET No. 65: 1997, IEEE C95.1-2005

**USB WiFi Module - Model: WiFiHU-a-1-NE, WiFiHU-c-1-NE
FCC ID: K7T-WIFIHU-A**

Test	Reference	Results
MPE Evaluation	FCC Guidelines for Human Exposure IEEE C95.1	Complies

1. Introduction

The EUT operates in the 2.4 GHz ISM band. Due to the EUT (include antenna) at its normal operation distance is at least 20 cm from the human body, the EUT was defined as a Mobile Device.

The reason to do the MPE Evaluation is to avoid the RF hazard to human body. The maximum output power and gain of the antenna were used to calculate the limited Power density (S) at 20 cm distance away from the product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 and Safety Code 6 are followed.

According to 1.1307 (b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

2. RF Exposure Limit

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational / Control Exposures				
30-300	61.4	0.163	1.0	6
300-1500	-	-	F/300	6
1500-100,000	-	-	5	6
(B) Limits for General Population / Uncontrolled Exposure				
30-300	27.5	0.073	0.2	30
300-1500	-	-	F/1500	30
1500-100,000	-	-	1.0	30

F= Frequency in MHz

3. RF Exposure calculations

From §FCC 1.1310 table 1, the maximum permissible RF exposure for an uncontrolled environment is 1 mW/(cm²) (or 10 W/m²)*

Power density (S) is calculated by the following formula:

$$S = (P * G) / 4\pi R^2$$

where, S = Power density (mW/cm²)

P = Output power to antenna (mW)

R = Distance between radiating structure and observation point (cm)

G = Gain of antenna in numeric

$\pi = 3.1416$

Example:

Assume a mobile device operates at 2412MHz and its maximum output power is 50mW, and the maximum gain of antenna is 1 (numeric) /0dBi.

then the power density (S) = $(50 * 1) / 4 * \pi * 20^2 = 0.00995$ (mW/cm²) (or = 0.0995 W/m²)


4 Description of EUT

The EUT is an USB WiFi Module, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name “Installation guide.pdf”

The customer confirmed the models listed as below were series model to model WiFiHU-a-1-NE, WiFiHU-c-1-NE (EUT), the difference between main model and series model are listed as below.

Model Number	Different
WiFiHU-a-1-NE	1. Carrier Boards (without RP-SMA connector) 2. Modules (with on-board antenna)
WiFiHU-c-1-NE	1. Carrier Boards (without RP-SMA connector) 2. Modules (with two antenna connectors)
WiFiHU-a	Modules (with on- board antenna)
WiFiHU-c	Modules (with two antenna connectors)

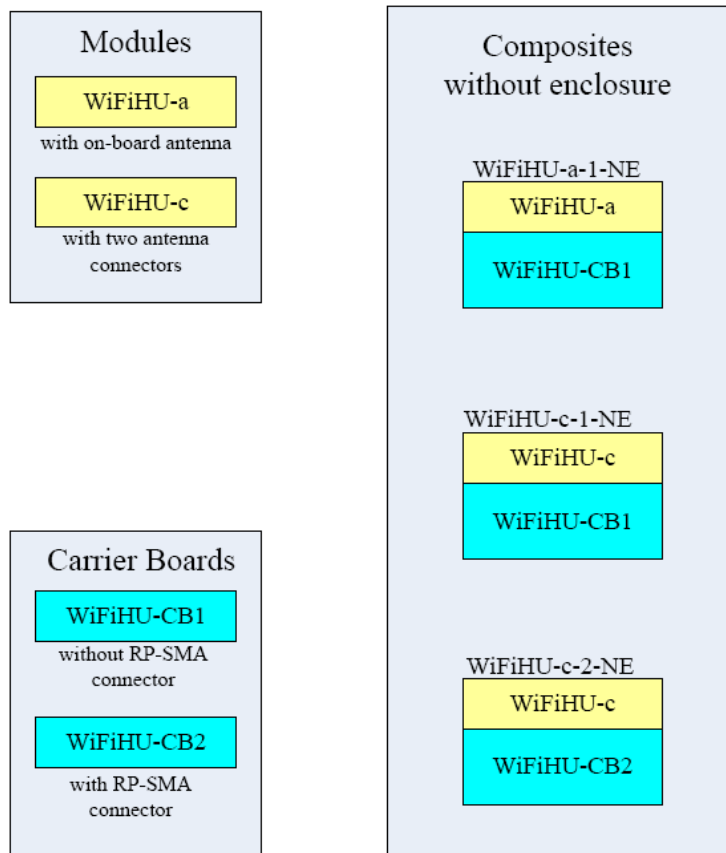



4.1 Antenna description

(1) Antenna 1

The EUT uses a permanently connected antenna.

Antenna Gain : 0 dBi
Antenna Type : Chip antenna
Connector Type : N/A

(2) Antenna 2

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2 dBi
Antenna Type : Dipole antenna
Connector Type : IPX

5. Test results

EUT : WiFiHU-a-1-NE

Mode	Channel Frequency (MHz)	Antenna gain (numeric)	Output power to antenna (mW)	Power density (mW/cm ²)	Limit of power density (mW/cm ²)
802.11b	2412	1.00	42.95	0.008545356	1.0
	2437	1.00	42.07	0.008370090	1.0
	2462	1.00	25.18	0.005008759	1.0
802.11g	2412	1.00	49.43	0.009833999	1.0
	2437	1.00	48.75	0.009699071	1.0
	2462	1.00	26.55	0.005281170	1.0
802.11n HT20	2412	1.00	50.23	0.009993788	1.0
	2437	1.00	49.09	0.009766302	1.0
	2462	1.00	35.81	0.007124102	1.0
802.11n HT40	2412	1.00	42.27	0.008408725	1.0
	2437	1.00	44.16	0.008784765	1.0
	2462	1.00	25.41	0.005055105	1.0

EUT : WiFiHU-c-1-NE

Mode	Channel Frequency (MHz)	Antenna gain (numeric)	Output power to antenna (mW)	Power density (mW/cm ²)	Limit of power density (mW/cm ²)
802.11b	2412	1.58	12.11	0.003817070	1.0
	2437	1.58	11.86	0.003738782	1.0
	2462	1.58	11.51	0.003628525	1.0
802.11g	2412	1.58	30.48	0.009610150	1.0
	2437	1.58	30.06	0.009478293	1.0
	2462	1.58	29.44	0.009283893	1.0
802.11n HT20	2412	1.58	30.97	0.009766302	1.0
	2437	1.58	30.27	0.009543994	1.0
	2462	1.58	29.79	0.009391396	1.0
802.11n HT40	2412	1.58	27.93	0.008805016	1.0
	2437	1.58	27.23	0.008584799	1.0
	2462	1.58	26.61	0.008389385	1.0

The Notice in Installation Manual has been stated as below:

While installing and operating this transmitter, the radio frequency exposure limit of 1 mW/ (cm²) may be exceeded at distances close to the transmitter. Therefore, the user must maintain a minimum distance of 20 cm from the device at all time.