



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

IEEE 802.11b Wireless PCI Card

Trade Name: D-Link

Model No.: DWL-520

FCC ID: KA22002060010-1

Report No.: B30612002-RP

Issue Date: June 16, 2003

Prepared for

**D-Link Corporation
No. 20, Park Ave. II, Science-based Industrial Park,
Hsinchu, Taiwan, R.O.C.**

Prepared by

**C&C LABORATORY, CO., LTD.
No. 81-1, Lane 210, Bade Rd. 2,
Luchu Hsiang, Taoyuan Hsien, Taiwan.**



TEL: 886-3-3240332

FAX: 886-3-3245235

**This report shall not be reproduced, except in full, without the written approval of
C&C Laboratory, Co., Ltd.**



VERIFICATION OF COMPLIANCE

Applicant: D-Link Corporation
 No. 20, Park Ave. II, Science-based Industrial Park,
 Hsinchu, Taiwan, R.O.C.

Equipment Under Test: IEEE 802.11b Wireless PCI Card

Trade Name: D-Link

Model No.: DWL-520

Serial Number: N/A

File Number: B30612002-RP

Date of Test: June 10 ~ 16, 2003

We hereby certify that:

The above equipment was tested by C&C Laboratory Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Approved By

Review By

Jonson Lee / Director
C&C Laboratory Co., Ltd.

Susan Su / Section Manager
C&C Laboratory Co., Ltd.



Table of Contents

- 1. GENERAL INFORMATION5**
 - 1.1 PRODUCT DESCRIPTION 5
 - 1.2 RELATED SUBMITTAL(S) / GRANT (S)..... 5
 - 1.3 TEST METHODOLOGY..... 5
 - 1.4 TEST FACILITY 5
 - 1.5 SPECIAL ACCESSORIES 5
 - 1.6 EQUIPMENT MODIFICATIONS 5
- 2. SYSTEM TEST CONFIGURATION6**
 - 2.1 EUT CONFIGURATION..... 6
 - 2.2 EUT EXERCISE..... 6
 - 2.3 TEST PROCEDURE..... 6
 - 2.4 CONFIGURATION OF TESTED SYSTEM 7
- 3. SUMMARY OF TEST RESULTS8**
- 4. DESCRIPTION OF TEST MODES8**
- 5. SPURIOUS EMISSION TEST9**
 - 5.1 STANDARD APPLICABLE 9
 - 5.2 EUT SETUP 9
 - 5.3 MEASUREMENT PROCEDURE..... 9
 - 5.4 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 10
 - 5.5 MEASUREMENT EQUIPMENT USED: 11
 - 5.6 MEASUREMENT RESULT 11
- 6. AC POWER LINE CONDUCTED EMISSION TEST24**
 - 6.1. STANDARD APPLICABLE 24
 - 6.2. EUT SETUP 24
 - 6.3. MEASUREMENT PROCEDURE..... 24
 - 6.4. MEASUREMENT EQUIPMENT USED: 25
 - 6.5. MEASUREMENT RESULT 25
- 7. 6 DB BANDWIDTH MEASUREMENT.....28**
 - 7.1 STANDARD APPLICABLE 28
 - 7.2 MEASUREMENT EQUIPMENT USED: 28
 - 7.3 TEST SETUP: 28
 - 7.4 MEASUREMENT PROCEDURE..... 29
 - 7.5 MEASUREMENT RESULT 29
- 8. PEAK OUTPUT POWER MEASUREMENT32**
 - 8.1 STANDARD APPLICABLE 32
 - 8.2 TEST SETUP 32
 - 8.3 MEASUREMENT EQUIPMENT USED: 32
 - 8.4 TEST RESULTS: 32



9. 100KHZ BANDWIDTH OF BAND EDGES MEASUREMENT..... 33

9.1 STANDARD APPLICABLE 33

9.2 MEASUREMENT PROCEDURE..... 33

9.3 MEASUREMENT RESULT 33

9.4 MEASUREMENT EQUIPMENT USED: 33

10. PEAK POWER SPECTRAL DENSITY 35

10.1 STANDARD APPLICABLE 35

10.2 MEASUREMENT PROCEDURE..... 35

10.3 MEASUREMENT RESULT 35

10.4 MEASUREMENT EQUIPMENT USED: 35

11. ANTENNA REQUIREMENT 38

11.1 STANDARD APPLICABLE 38

11.2 ANTENNA CONNECTED CONSTRUCTION 38

12. RF EXPOSURE..... 39

12.1 STANDARD APPLICABLE 39

12.2 MEASUREMENT RESULT 40



1. GENERAL INFORMATION

1.1 Product Description

The D-Link Corporation Model: DWL-520 (referred to as the EUT in this report) is IEEE 802.11b Wireless PCI Card.

The EUT is compliance with IEEE 802.11b Standard.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2412 - 2462MHz, 11channels
- B). Rated Output Power: 15 dBm
- C). Modulation Type: Direct Sequence Spread Spectrum, (CCK; DQPSK; DBPSK; DFSK)
- D). Antenna Designation: Dipole Antenna, 2 dBi, Non-User Replaceable
- E). Power Supply: 5Vdc from PC PCI slot

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: KA22002060010-1 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (1992). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of C&C Laboratory, Co., Ltd. No. 81-1, 210 Lane, Pa-de 2nd Road, Lu-Chu Hsiang, Taoyuan, Taiwan, R.O.C.. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.



2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table-which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table-which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

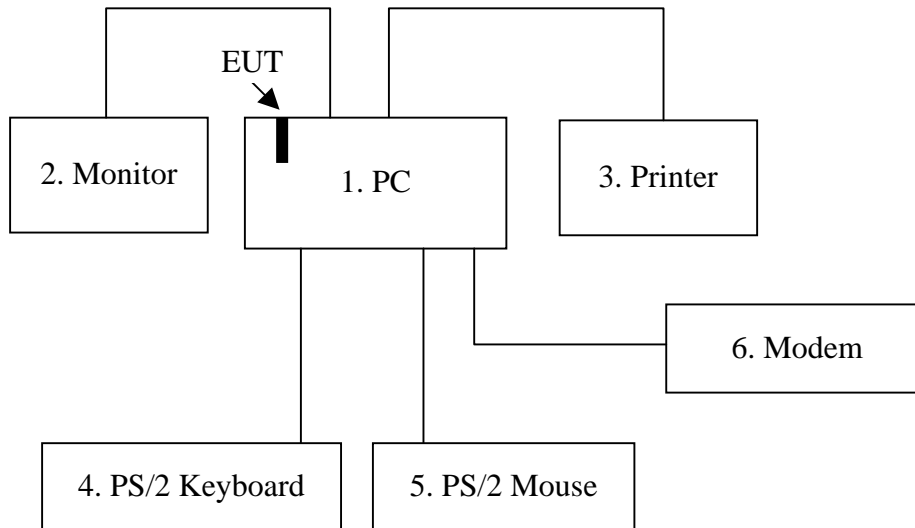


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Data Cable	Power Cord
1.	PC	EVO D300	6K1BKF83F10T	FCC DoC	Compaq	N/A	Unshielded, 1.8m
2.	Monitor	GDM-17SE2T	7145529	AK8GDM17SE27	SONY	Unshielded, 1.8m with a core	Unshielded, 1.8m
3.	Printer	EPSON STYLUS C20SX	DW4E126664	FCC DoC	EPSON	Unshielded, 1.8m	Unshielded, 1.8m
4.	PS2 Keyboard	SK-2800C	B1C790BCPJ73JQ	GYUR79SK	Compaq	Shielded, 1.8m	N/A
5.	PS/2 Mouse	M-CAA43	PHB02400489	FCC DoC	Logitech	Shielded, 1.8m	N/A
6.	Modem	2400	94-364-176272	DK467GSM24	Computer Peripherals	Unshielded, 1.8m	Unshielded, 1.8m



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§ 15.247(c)	Spurious Emission	Compliant
§ 15.207(a)	AC Power Port Conducted Emission	Compliant
§ 15.247(a)(2)	6dB Bandwidth	Compliant
§ 15.247(b)	Peak Output Power	Compliant
§ 15.247(c)	100 kHz Bandwidth Of Frequency Band Edges	Compliant
§ 15.247(d)	Power Density	Compliant
§ 15.203	Antenna Requirement	Compliant
§ 1.1310 and § 2.1093	RF exposures	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel 1(2412MHz), 6(2437MHz) and 11(2462MHz) with 11Mbps highest data rate are chosen for full testing.



5. SPURIOUS EMISSION TEST

5.1 Standard Applicable

According to § 15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in § 15.209(a). And according to § 15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

5.2 EUT Setup


1. The radiated emission tests were performed in the 3 meters open-test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was put in the front of the test table. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor, printer, K/B and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

5.3 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until all frequency measured were complete.

5.4 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

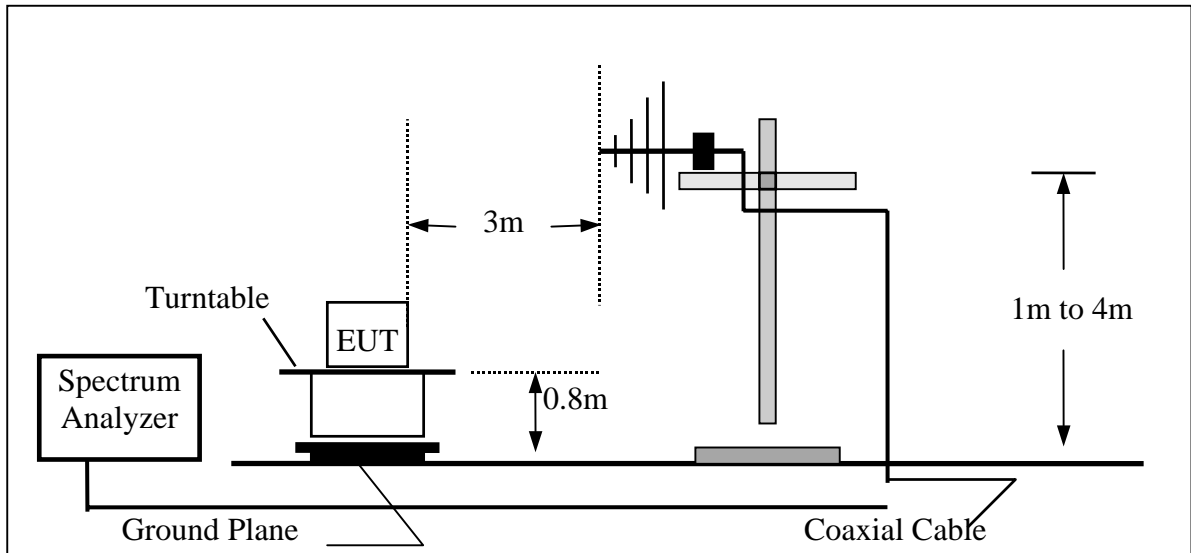

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

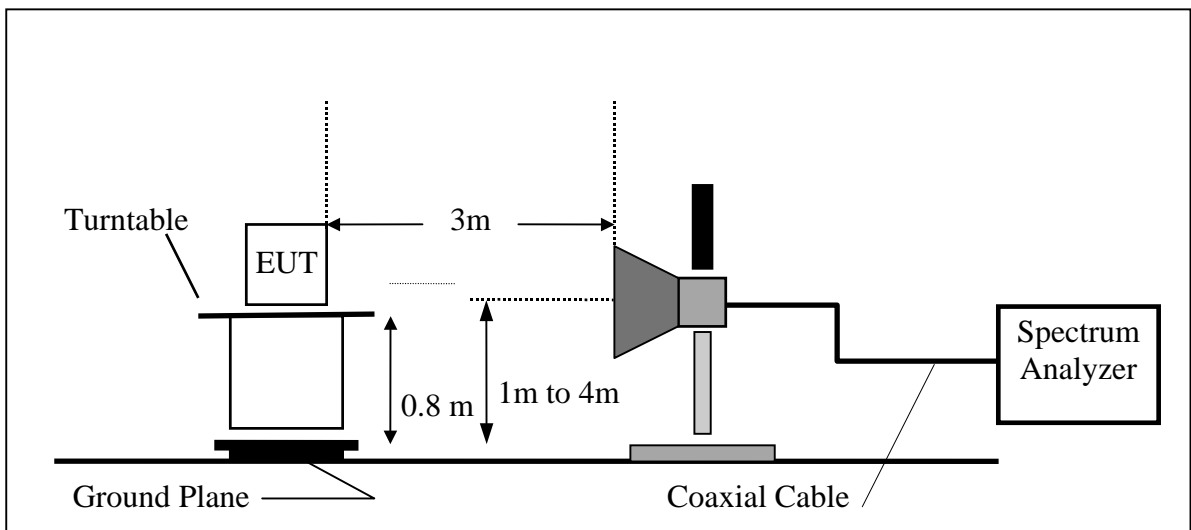



5.5 Measurement Equipment Used:

Open Area Test Site # 3					
EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/19/2003	03/18/2004
EMI Test Receiver	R&S	ESVS20	838804/004	01/05/2003	01/04/2004
Pre-Amplifier	HP	8447D	2944A09173	03/04/2003	03/03/2004
Bilog Antenna	SCHWAZBECK	VULB9163	145	07/06/2002	07/05/2003
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	09/07/2002	09/06/2003
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/24/2003	02/23/2004
Loop Antenna	EMCO	6502	2356	07/11/2002	07/10/2003
Pre-Amplifier	HP	8449B	3008B00965	10/01/2002	10/02/2003

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

5.6 Measurement Result


Refer to attach tabular data sheets.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.




Conducted Spurious Emission Measurement Result (Ch Low)

Ch Low 30MHz~2.9GHz

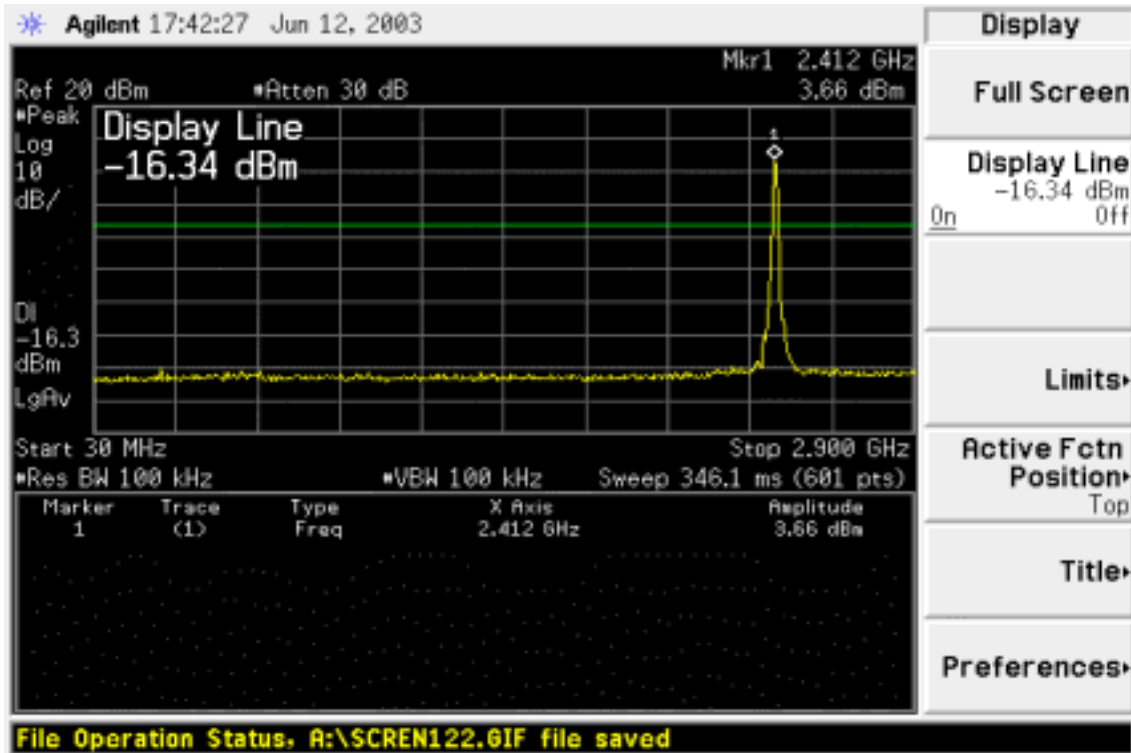


Ch Low 2.9GHz~26GHz

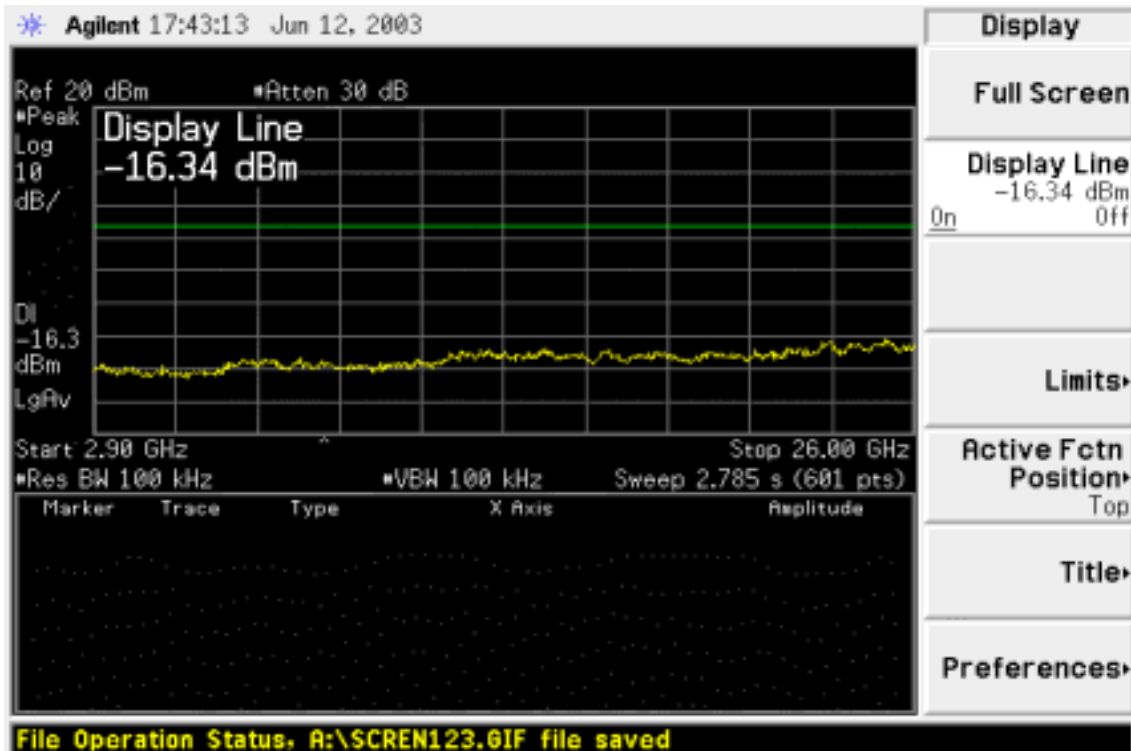




Conducted Spurious Emission Measurement Result (Ch Mid)

Ch Mid 30MHz~2.9GHz

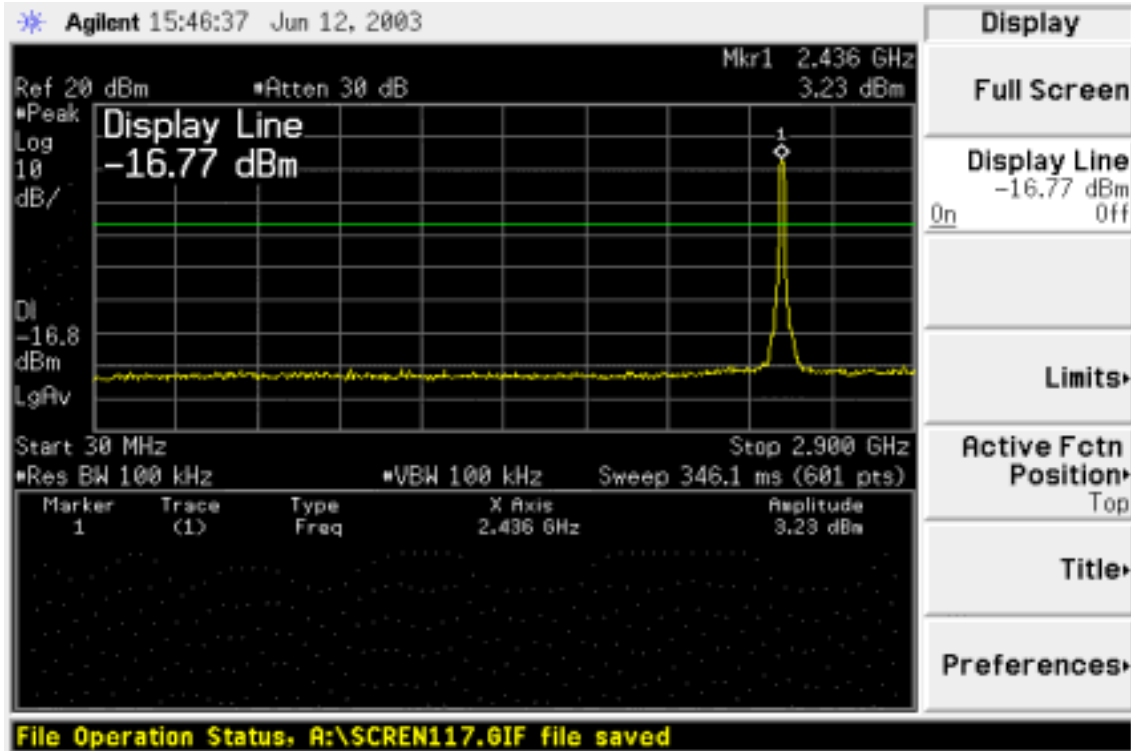


Ch Mid 2.9GHz~26GHz

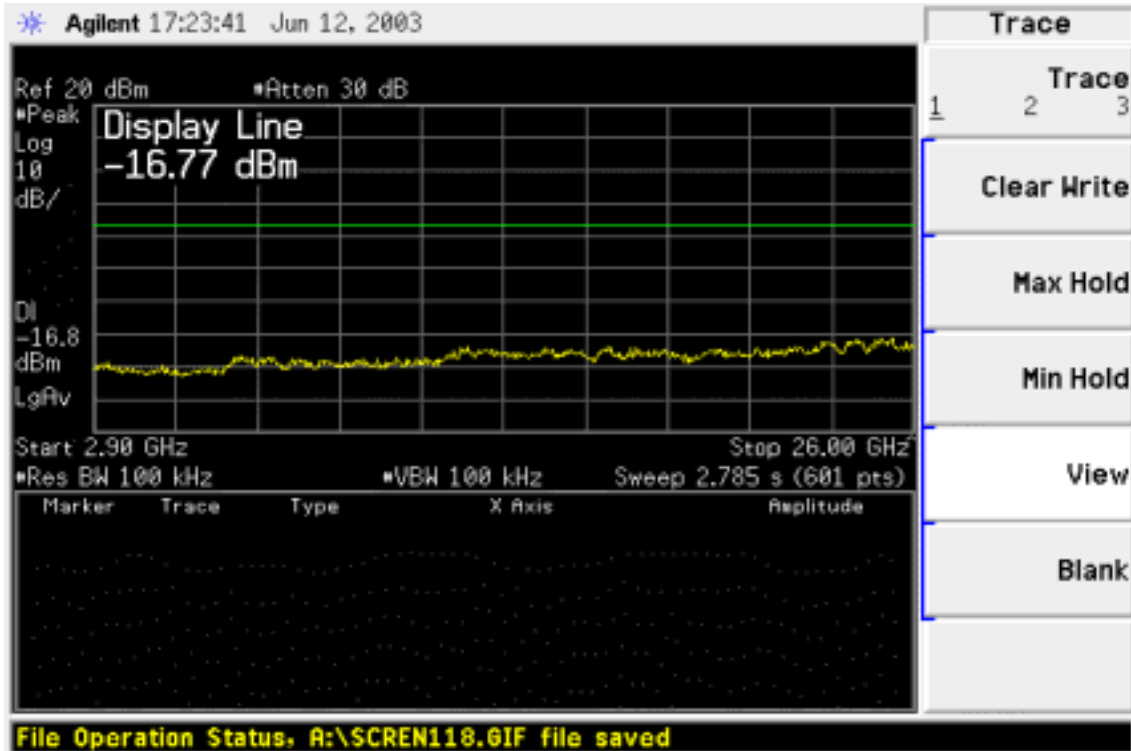




Conducted Spurious Emission Measurement Result (Ch High)

Ch High 30MHz~2.9GHz

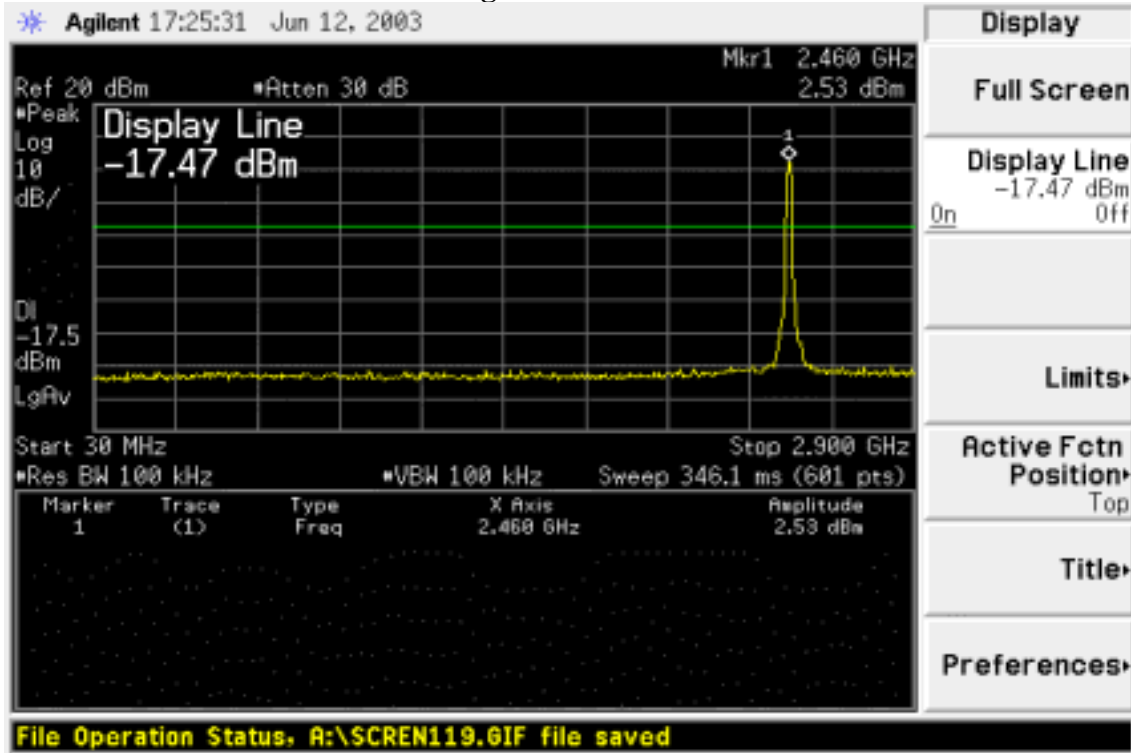

Ch High 2.9GHz~26GHz

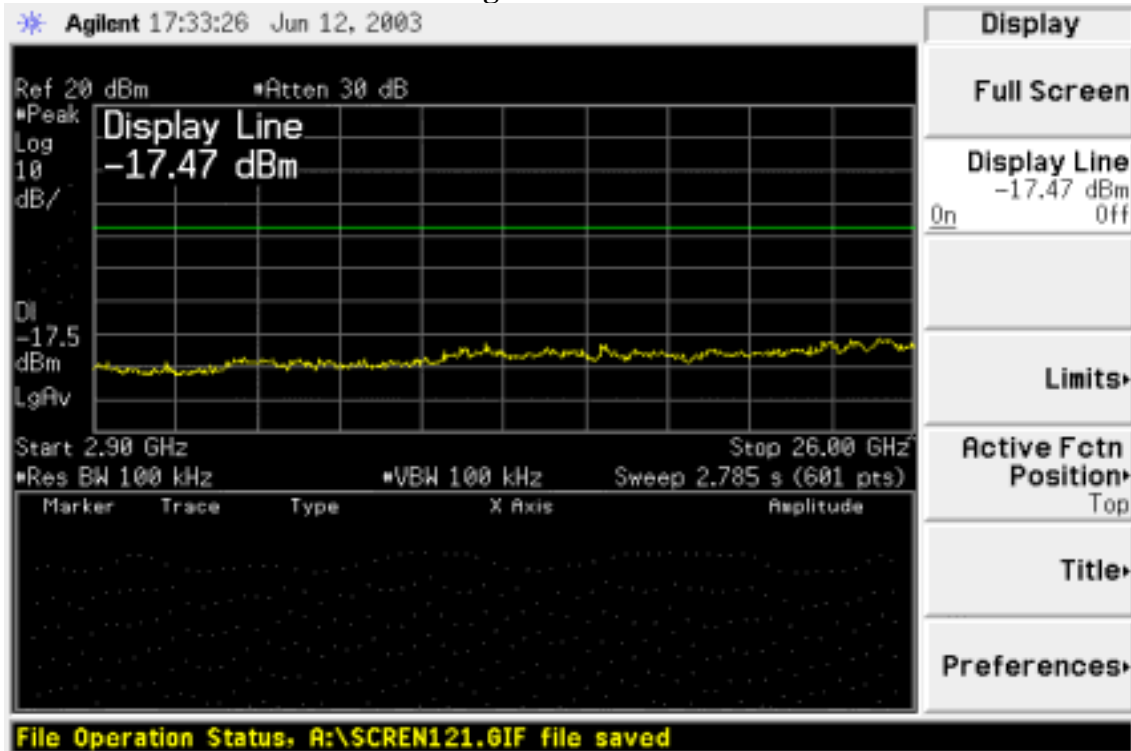



Radiated Spurious Emission Measurement Result (Below 1GHz)

Operation Mode	TX CH Low	Test Date:	June 10, 2003
Fundamental Frequency	2412MHz	Test By	Ben
Temperature	20°C	Pol	Ver./Hor
Humidity	65%		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @ 3m (dBuV/m)	Safe Margin (dB)
201.90	V	Peak	23.40	14.95	38.35	43.50	-5.15
433.00	V	Peak	14.97	20.36	35.33	46.00	-10.67
603.33	V	Peak	11.19	25.34	36.53	46.00	-9.47
624.33	V	Peak	11.68	25.13	36.81	46.00	-9.19
641.83	V	Peak	12.59	24.96	37.55	46.00	-8.45
767.83	V	Peak	10.37	25.97	36.34	46.00	-9.66
433.00	H	Peak	18.30	20.36	38.66	46.00	-7.34
501.83	H	Peak	11.09	22.57	33.66	46.00	-12.34
624.33	H	Peak	12.18	25.13	37.31	46.00	-8.69
672.17	H	Peak	12.09	25.27	37.36	46.00	-8.64
767.83	H	Peak	10.70	25.97	36.67	46.00	-9.33
945.17	H	Peak	5.74	28.79	34.53	46.00	-11.47

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Radiated Spurious Emission Measurement Result (Below 1GHz)

Operation Mode	TX CH Mid	Test Date	June 10, 2003
Fundamental Frequency	2437MHz	Test By	Ben
Temperature	22°C	Pol	Ver./Hor
Humidity	63%		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @ 3m (dBuV/m)	Safe Margin (dB)
433.00	V	Peak	15.47	20.36	35.83	46.00	-10.17
603.00	V	Peak	10.36	25.34	35.70	46.00	-10.30
624.33	V	Peak	11.18	25.13	36.31	46.00	-9.69
637.17	V	Peak	12.61	25.01	37.62	46.00	-8.38
662.83	V	Peak	13.71	25.11	38.82	46.00	-7.18
767.83	V	Peak	11.87	25.97	37.84	46.00	-8.16
55.20	H	Peak	11.55	14.42	25.97	40.00	-14.03
433.00	H	Peak	17.97	20.36	38.33	46.00	-7.67
501.83	H	Peak	10.25	22.57	32.82	46.00	-13.18
623.17	H	Peak	11.84	25.14	36.98	46.00	-9.02
667.50	H	Peak	12.32	25.19	37.51	46.00	-8.49
767.83	H	Peak	8.70	25.97	34.67	46.00	-11.33

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Radiated Spurious Emission Measurement Result (Below 1GHz)

Operation Mode	TX CH High	Test Date	June 10, 2003
Fundamental Frequency	2462MHz	Test By	Ben
Temperature	20°C	Pol	Ver./Hor
Humidity	65%		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @ 3m (dBuV/m)	Safe Margin (dB)
431.83	V	Peak	14.73	20.37	35.10	46.00	-10.90
500.67	V	Peak	11.78	22.53	34.31	46.00	-11.69
603.33	V	Peak	9.36	25.34	34.70	46.00	-11.30
624.33	V	Peak	11.68	25.13	36.81	46.00	-9.19
637.17	V	Peak	13.78	25.01	38.79	46.00	-7.21
767.83	V	Peak	11.03	25.97	37.00	46.00	-9.00
431.83	H	Peak	17.56	20.37	37.93	46.00	-8.07
501.83	H	Peak	11.09	22.57	33.66	46.00	-12.34
624.33	H	Peak	11.51	25.13	36.64	46.00	-9.36
668.67	H	Peak	11.63	25.21	36.84	46.00	-9.16
672.17	H	Peak	12.93	25.27	38.20	46.00	-7.80
767.83	H	Peak	9.37	25.97	35.34	46.00	-10.66

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
- (3) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX Low Mode Test Date: June 10, 2003
 Temperature: 20°C Test By: Ben
 Humidity: 65% Pol: Vertical

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
1217	51.50	---	-8.95	42.55	---	74.00	54.00	-11.45	Peak
1473	60.17	---	-7.78	52.39	---	74.00	54.00	-1.61	Peak
4824	--					74.00	54.00		
7236	--					74.00	54.00		
9648	--					74.00	54.00		
12060	--					74.00	54.00		
14472	--					74.00	54.00		
16884	--					74.00	54.00		
19296	--					74.00	54.00		
21708	--					74.00	54.00		
24120	--					74.00	54.00		

Remark:

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.



Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX Low Mode Test Date: June 10, 2003
 Temperature: 20°C Test By: Ben
 Humidity: 65% Pol: Horizontal

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
				Peak (dBuV/m)	AV (dBuV/m)				
1206	54.84	---	-8.99	45.85	---	74.00	54.00	-8.15	Peak
1483	57.00	---	-7.71	49.29	---	74.00	54.00	-4.71	Peak
4824	--					74.00	54.00		
7236	--					74.00	54.00		
9648	--					74.00	54.00		
12060	--					74.00	54.00		
14472	--					74.00	54.00		
16884	--					74.00	54.00		
19296	--					74.00	54.00		
21708	--					74.00	54.00		
24120	--					74.00	54.00		

Remark:

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
 Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms



Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX Mid Mode Test Date: June 10, 2003
 Temperature: 20°C Test By: Ben
 Humidity: 65% Pol: Vertical

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
1210	50.50	---	-8.98	41.52	---	74.00	54.00	-12.48	Peak
1473	59.17	---	-7.78	51.39	---	74.00	54.00	-2.61	Peak
4874	--					74.00	54.00		
7311	--					74.00	54.00		
9748	--					74.00	54.00		
12185	--					74.00	54.00		
14622	--					74.00	54.00		
17059	--					74.00	54.00		
19496	--					74.00	54.00		
21933	--					74.00	54.00		
24370	--					74.00	54.00		

Remark:

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
 Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms



Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX Mid Mode Test Date: June 10, 2003
 Temperature: 20°C Test By: Ben
 Humidity: 65% Pol: Horizontal

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
1210	52.50	---	-8.98	43.52	---	74.00	54.00	-10.48	Peak
1480	56.50	---	-7.73	48.77	---	74.00	54.00	-5.23	Peak
4874	--					74.00	54.00		
7311	--					74.00	54.00		
9748	--					74.00	54.00		
12185	--					74.00	54.00		
14622	--					74.00	54.00		
17059	--					74.00	54.00		
19496	--					74.00	54.00		
21933	--					74.00	54.00		
24370	--					74.00	54.00		

Remark:

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
 Spectrum AV Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200ms



Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX High Mode Test Date: June 10, 2003
 Temperature: 20°C Test By: Ben
 Humidity: 65% Pol: Vertital

Freq. (MHz)	Peak	AV	Ant./CL CF(dB)	Actual FS		Peak	AV	Margin (dB)	Remark (dB)
	Reading (dBuV)	Reading (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)		
1206	50.84	---	-8.99	41.85	---	74.00	54.00	-12.15	Peak
1216	51.00	---	-8.95	42.05	---	74.00	54.00	-11.95	Peak
1473	59.67	---	-7.78	51.89	---	74.00	54.00	-2.11	Peak
4924	--					74.00	54.00		
7386	--					74.00	54.00		
9848	--					74.00	54.00		
12310	--					74.00	54.00		
14772	--					74.00	54.00		
17234	--					74.00	54.00		
19696	--					74.00	54.00		
22158	--					74.00	54.00		
24620	--					74.00	54.00		

Remark:

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.



Radiated Spurious Emission Measurement Result (Above 1GHz)

Operation Mode: TX High Mode Test Date: June 10, 2003
 Temperature: 20°C Test By: Ben
 Humidity: 70 % Pol: Horizontal

Freq. (MHz)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF(dB)	Actual FS		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark (dB)
	Peak	AV		Peak	AV	Limit	Limit		
1213	52.67	---	-8.96	43.71	---	74.00	54.00	-10.29	Peak
1483	56.50	---	-7.71	48.79	---	74.00	54.00	-5.21	Peak
4924	--					74.00	54.00		
7386	--					74.00	54.00		
9848	--					74.00	54.00		
12310	--					74.00	54.00		
14772	--					74.00	54.00		
17234	--					74.00	54.00		
19696	--					74.00	54.00		
22158	--					74.00	54.00		
24620	--					74.00	54.00		

Remark:

- (1) Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (4) Spectrum Peak Setting 1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.

6. AC POWER LINE CONDUCTED EMISSION TEST

6.1. Standard Applicable

According to § 15.207(a). frequency within 150kHz to 30MHz shall not exceed

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2. EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was plug-in the host PC via USB port. The host PC system was placed on the center of the back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The mouse was placed next to the Keyboard, flushed with the back of keyboard.
4. The spacing between the peripherals was 10 centimeters.
5. External I/O cables were draped along the edge of the test table and bundle when necessary.
6. The host PC system was connected with 110Vac/60Hz power source.

6.3. Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



6.4. Measurement Equipment Used:

Conducted Emission Test Site # 3					
EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
EMI Test Receiver	R&S	ESCS30	847793/012	12/21/2002	12/20/2003
LISN	R&S	ESH2-Z5	843285/010	12/16/2002	12/15/2003
LISN	EMCO	3825/2	9003-1628	07/26/2002	07/25/2003

6.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



LINE CONDUCTED TEST

Model Number: DWL-520

Tested by: Steven

Test Mode: normal operating

Detector Function: Quasi-Peak

Temperature: 28⁰C

Humidity: 63%RH

(The chart below shows the highest readings taken from the final data)

Freq.	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.150	57.33	24.68	66.00	56.00	-8.67	-31.32	L1
0.162	56.73	13.38	65.65	55.65	-8.92	-42.27	L1
0.153	55.97	34.01	65.90	55.90	-21.89	-21.89	L1
0.180	53.26	---	65.12	55.12	-11.86	---	L1
5.016	40.84	---	60.00	50.00	-19.16	---	L1
20.280	45.64	---	60.00	50.00	-14.36	---	L1
0.150	56.50	12.08	66.00	56.00	-9.50	-43.92	L2
0.180	51.03	---	65.12	55.12	-14.09	---	L2
0.217	47.82	---	64.06	54.06	-16.24	---	L2
0.233	45.33	---	63.61	53.61	-18.28	---	L2
4.997	40.01	---	56.00	46.00	-15.99	---	L2
20.280	40.63	---	60.00	50.00	-19.37	---	L2

Remark:

- (1) Measuring frequencies from 0.15 MHz to 30MHz.
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)




Conducted Emission Test Plot

L1

Test Mode: 110V

Customer Name: D-Link
Model Name: DWL-520
Project No.: B030612002-RP
Engineer Name: steven

Index

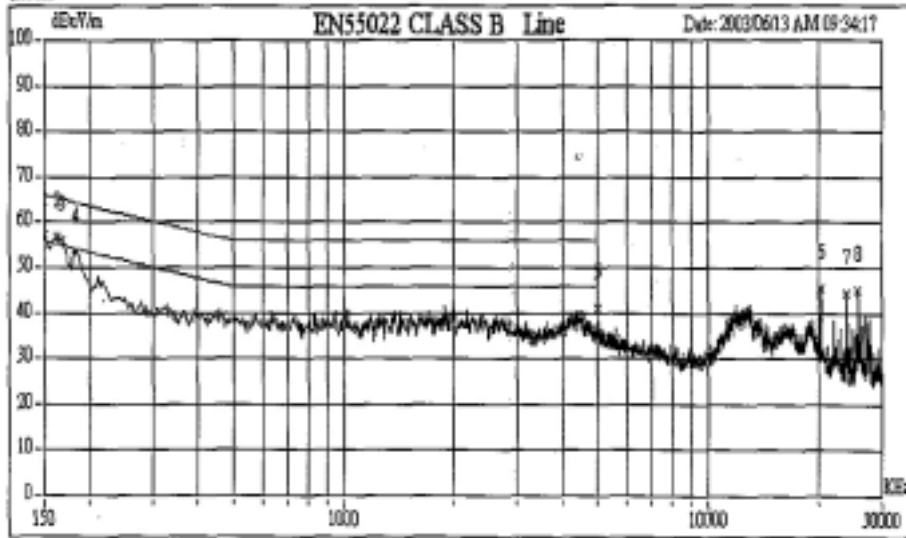


L2

Test Mode: 110V

Customer Name: D-Link
Model Name: DWL-520
Project No.: B030612002-RP
Engineer Name: steven

Index

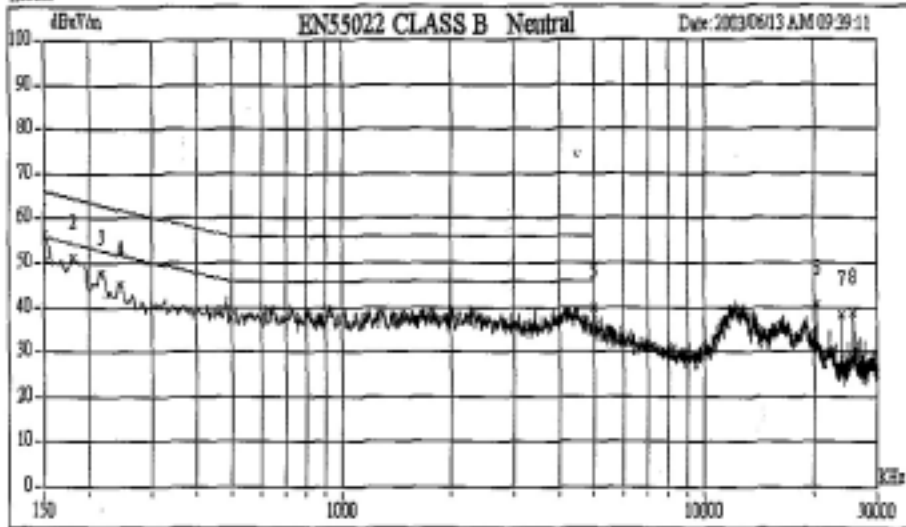

7. 6 dB Bandwidth Measurement

7.1 Standard Applicable

According to § 15.247(a)(2), DSSS Systems operating in the 2400MHz-2483.5MHz and 5725MHz – 5850MHz bands. The Minimum 6dB bandwidth shall be at least 500kHz.

7.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	Advantest	R3182	110600647	11/16/2002	11/15/2003
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A

7.3 Test Setup:

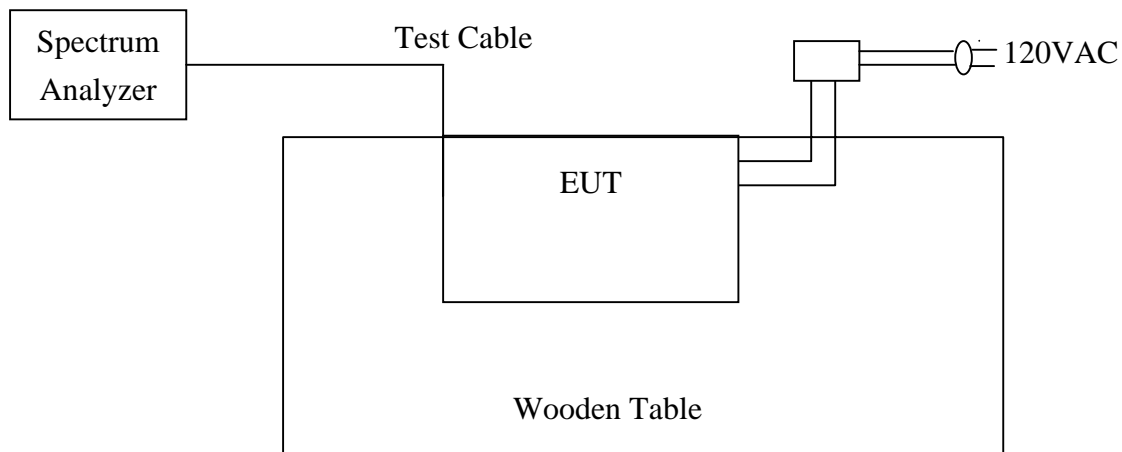


Fig. 4

Fig. 4 : Measurement setup for testing on Antenna connector



7.4 Measurement Procedure


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100kHz, VBW = RBW, Span= 20MHz, Sweep=auto
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

7.5 Measurement Result


Channel	Bandwidth(MHz)	Bandwidth (kHz)	Result
Low	8.70	> 500	PASS
Mid	8.72	> 500	PASS
High	8.70	> 500	PASS



6dB Band Width Test Data CH-LOW

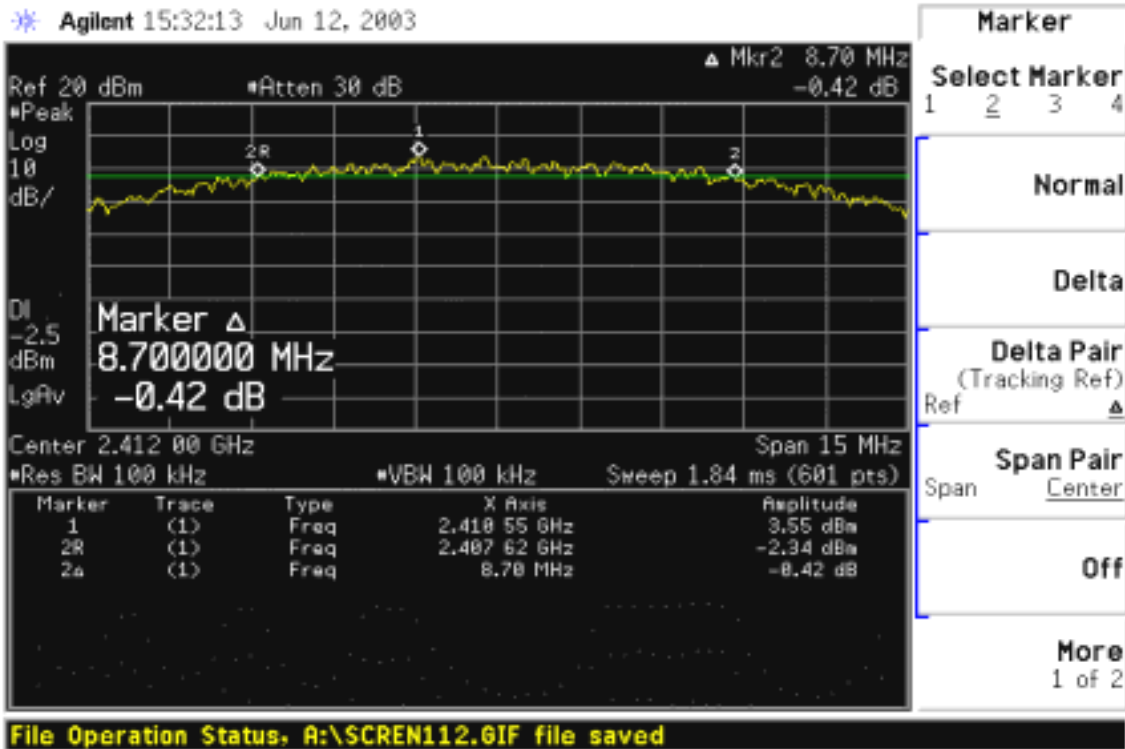


6dB Band Width Test Data CH-Mid

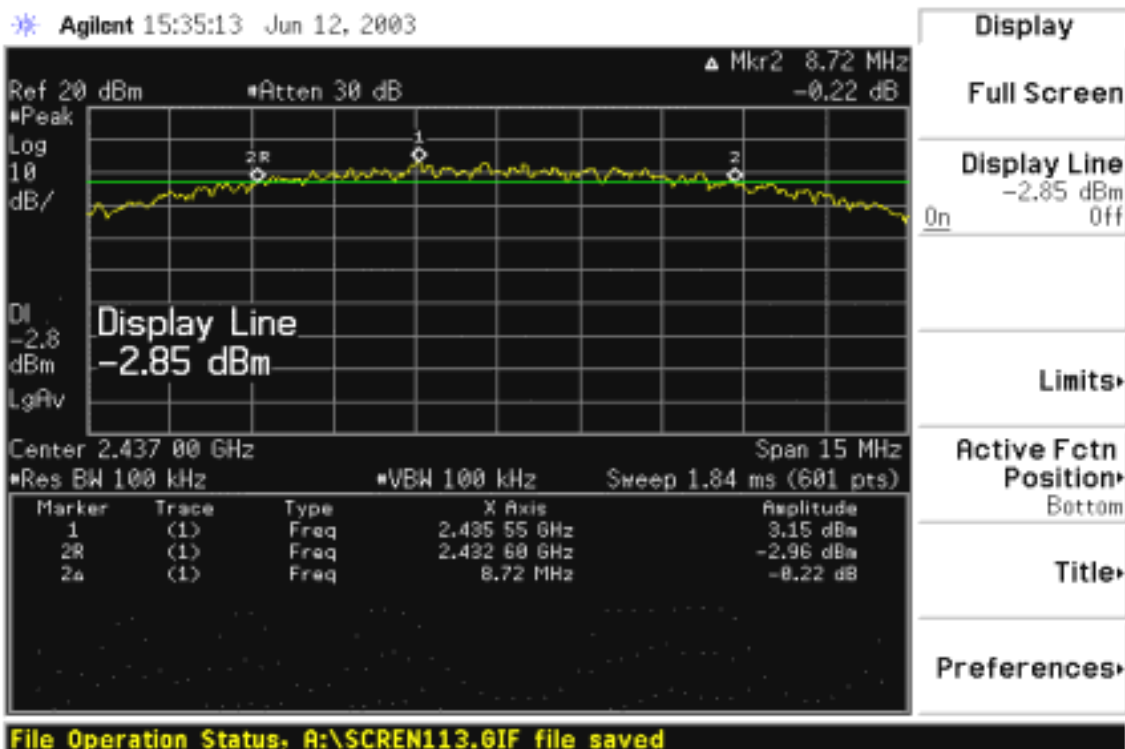



6dB Band Width Test Data CH-HIGH

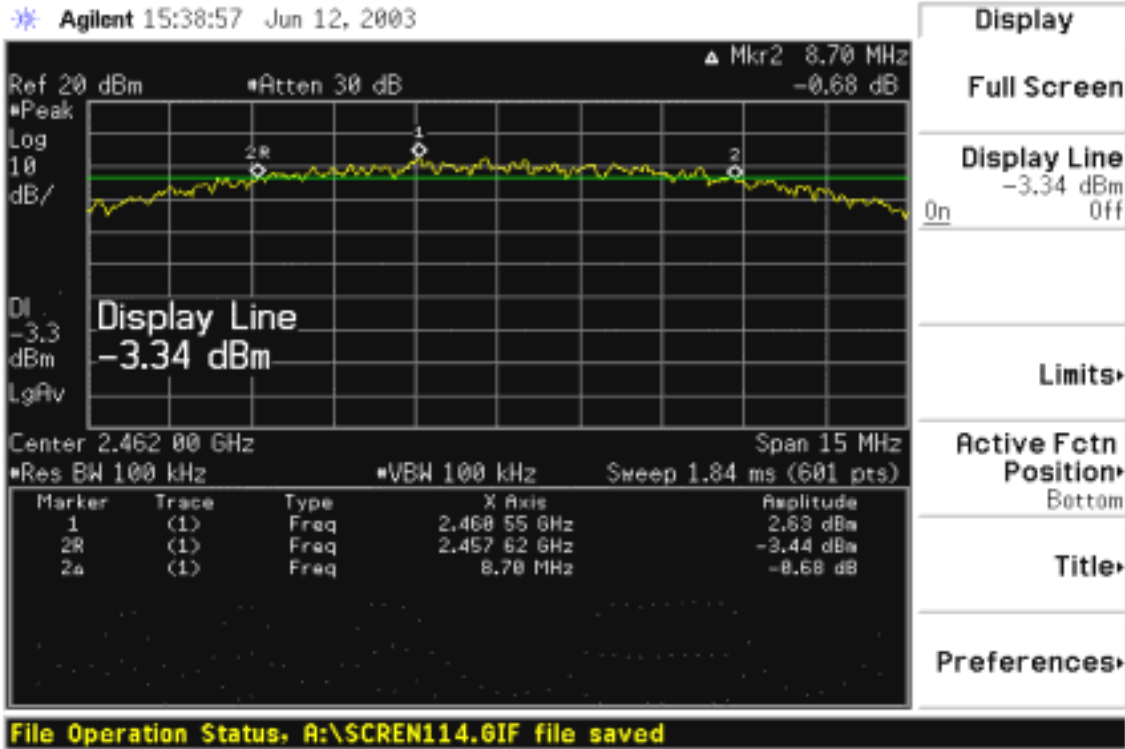




8. PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

According to § 15.247(b), for direct sequence systems, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

8.2 Test Setup

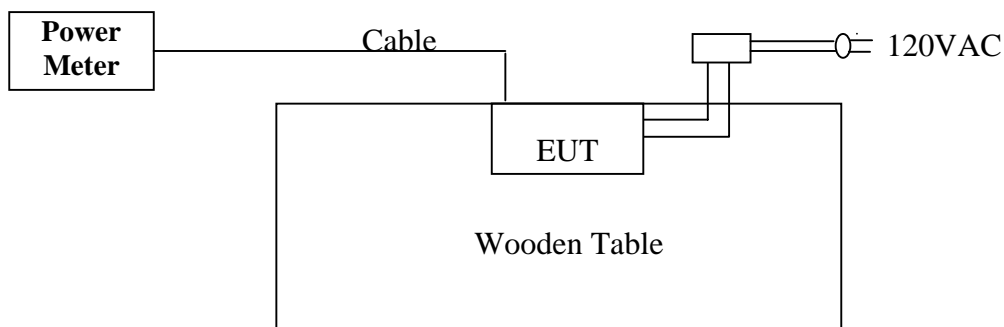

8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
RF Power Meter	Agilent	436A	2709A29027	03/16/2003	03/15/2004
Power Sensor	Agilent	8481A	2702A61366	3/16/2003	3/15/2004
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A

8.4 Test Results:

Channel	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	15.37	1.30	16.67	0.04645	1	PASS
Mid	14.96	1.30	16.26	0.04227	1	PASS
High	14.57	1.30	15.87	0.03864	1	PASS



9. 100kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to § 15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

9.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100kHz, Center Freq. 2.39GHz, 2.4835GHz, Span=100MHz, Sweep = auto.
5. Mark Peak ,2.4GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

9.3 Measurement Result

Refer to attach spectrum analyzer data chart.


9.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	Advantest	R3182	110600647	11/16/2002	11/15/2003
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A



Out of Band Test Data CH-LOW

Agilent 15:25:33 Jun 12, 2003

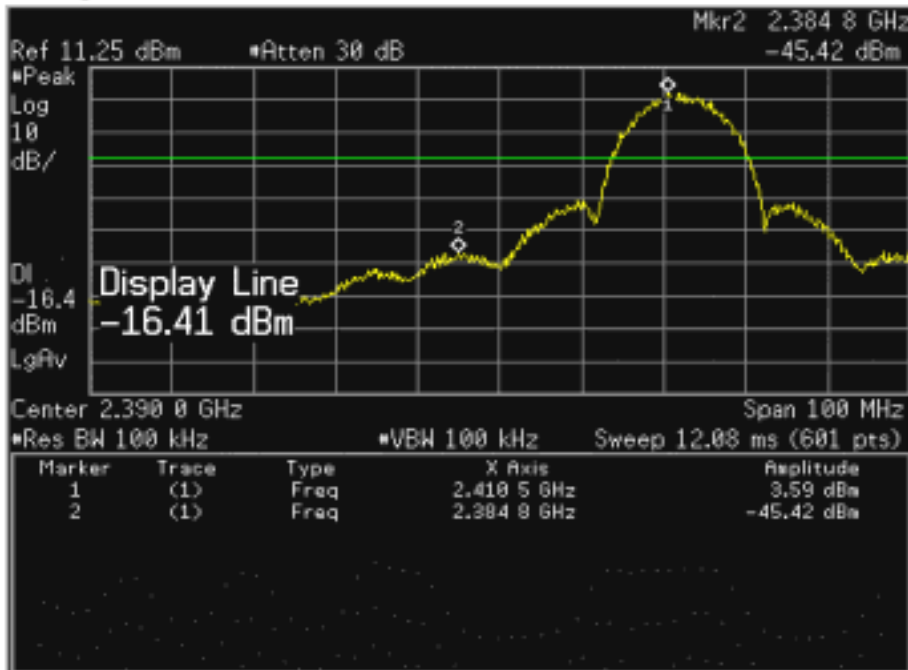

Display

Full Screen

Display Line -16.41 dBm On Off

Limits

Active Fctn Position Bottom


Title

Preferences

File Operation Status, A:\SCREN111.GIF file saved

Out of Band Test Data CH-HIGH

Agilent 15:12:03 Jun 12, 2003

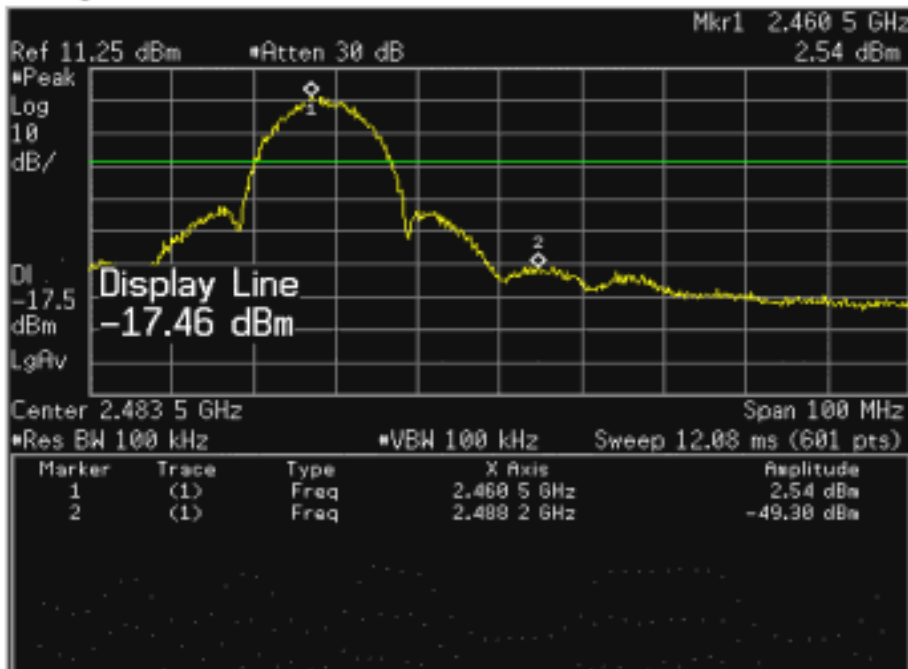

Display

Full Screen

Display Line -17.46 dBm On Off

Limits

Active Fctn Position Bottom

Title

Preferences

File Operation Status, A:\SCREN110.GIF file saved



10. Peak Power Spectral Density

10.1 Standard Applicable

According to § 15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

10.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 3kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.

10.3 Measurement Result


CHANNE L	Reading dBm	Cable Loss dB	Density dBm	Limint dBm	Result
Low	-12.57	1.30	-11.27	8	PASS
Mid	-13.08	1.30	-11.78	8	PASS
High	-13.59	1.30	-12.29	8	PASS

10.4 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	Advantest	R3182	110600647	11/16/2002	11/15/2003
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/23/2002	07/22/2003
low loss cable	Huber + Suhner	Sucoflex 104	N/A	N/A	N/A



Power Density Test Data CH-LOW

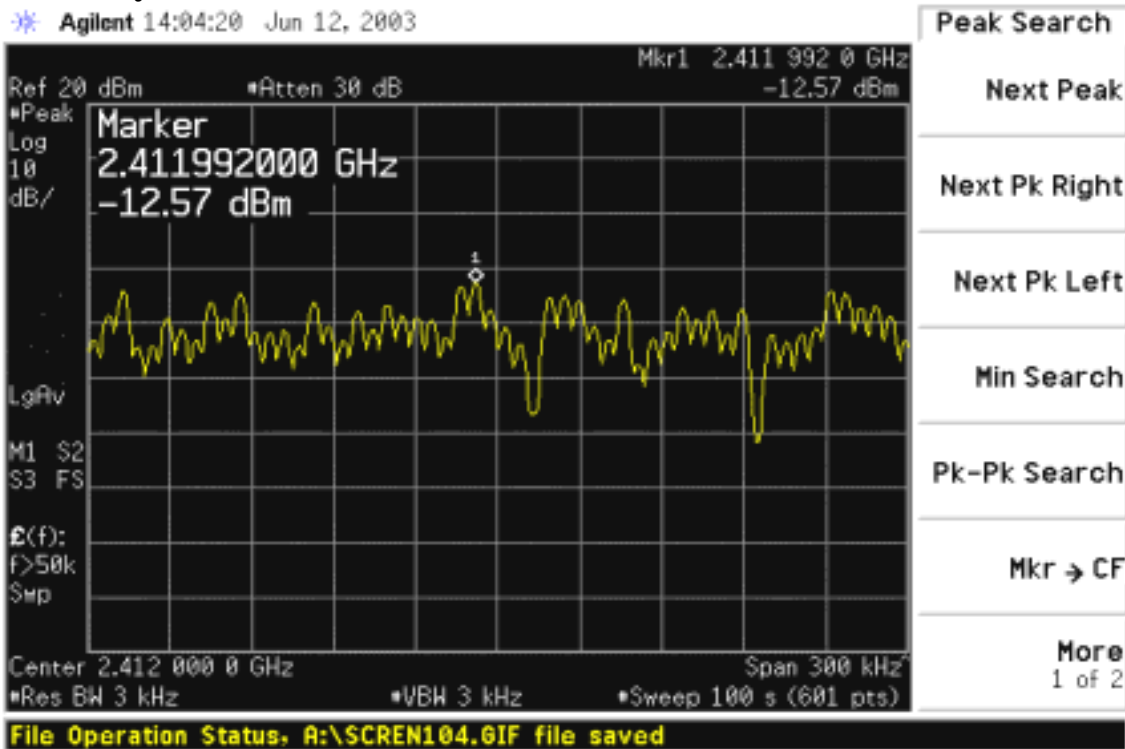


Power Density Test Data CH-MID

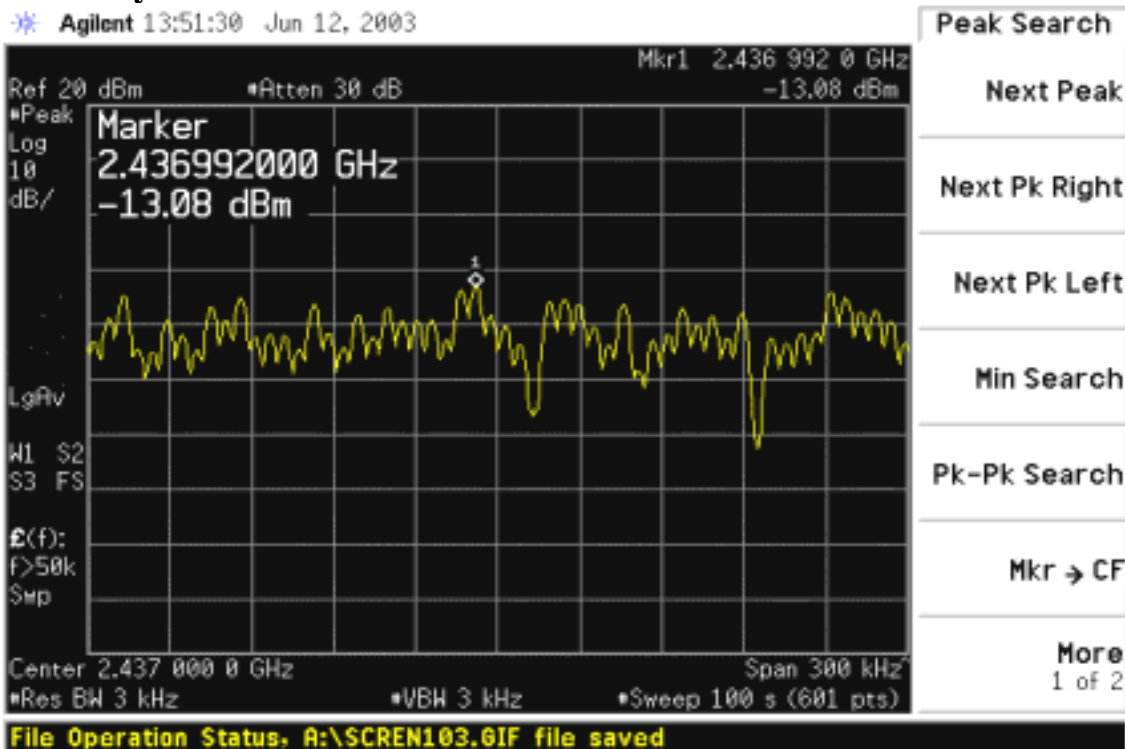



Power Density Test Data CH-HIGH

Agilent 13:48:26 Jun 12, 2003

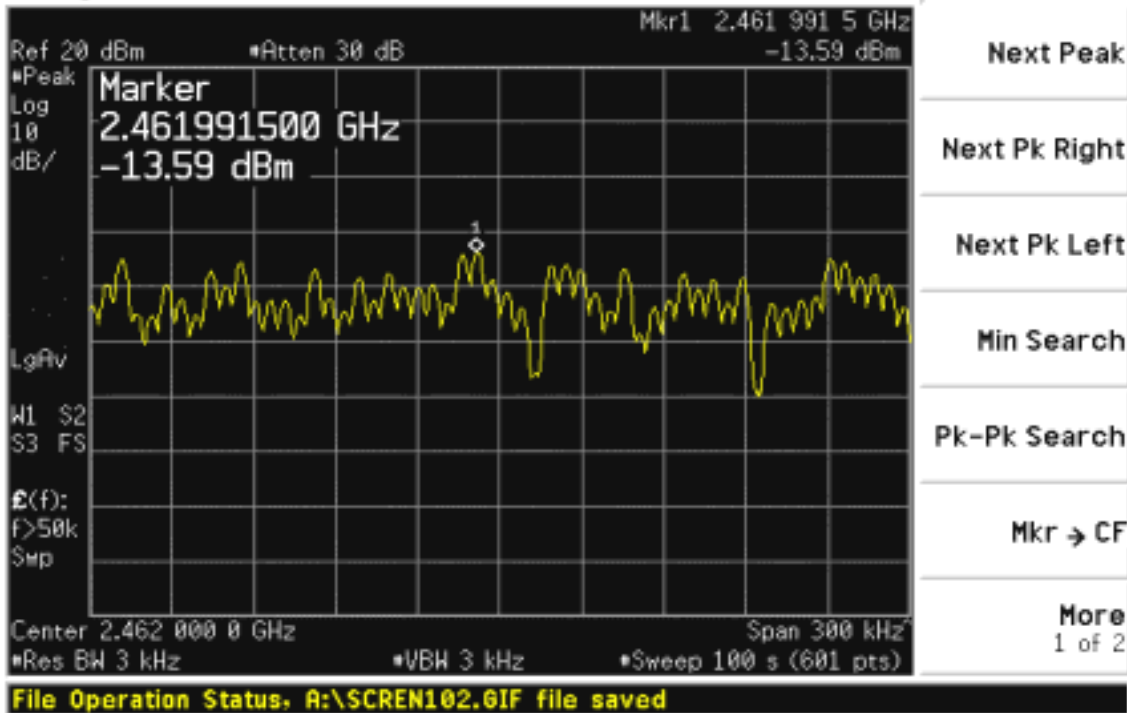



11. ANTENNA REQUIREMENT

11.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to § 15.247(4)(i), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in 1dB that the directional gain of the antenna exceeds 6dBi.

11.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 2 dBi, and the antenna connector is designed with reverse SMA connector and no consideration of replacement by the end use. Please see Antenna Specific for details.



12. RF Exposure

12.1 Standard Applicable

According to § 15.247(b)(4) and § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

This device is classed as a Mobile Device.

According to § 1.1310 and § 2.1093 RF exposure is calculated.

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	F/1500	30
1500-15000	/	/	1.0	30

F = frequency in MHz

* = Plane-wave equipment power density



MPE Prediction

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4R^2}$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 15(dBm)

Maximum peak output power at antenna input terminal: 31.622m (mW)

Antenna gain (typical): 2 (dBi)

Maximum antenna gain: 1 (numeric)

Prediction distance: 3 (cm)

Prediction frequency: 2462 (MHz)

MPE limit for uncontrolled exposure at prediction frequency: 1 (mW/cm²)

Power density at predication frequency at 3 (cm) distance

S	P	P	G	G	R
mW/cm ²	mW	dBm	dBi	(numeric)	cm
0.44337158	31.6227766	15	2	1.5848932	3

50.11872336

113.04

12.2 Measurement Result

The predicted power density level at 3 cm is 0.44 mW/cm². This is below the uncontrolled exposure limit of 1 mW/cm² at 2462MHz.