


電子零組件承認/申請報告書

編號:E5662

D-LINK P/N：505924181201		申請者：林人展		主管：金郁川	
零組件品名：ANT. 2.4G IW-241RS8-120-1 GRAY					
原製造廠商：JOYMAX(566700)			原廠編號：IW-241RS8-120-1		
在台代理商：士誼		連絡人：賴溢昌		電話：03-4931401	
類別：1 1.標準品 2.訂製品 3.模具				REVISION	STATUS
申請項目：1 1.初試 2.再審 3. Second Source				PAGE	REV
應用機種：WAP-B11				0	A
COMMENTS:				0-1	A
測試結果		FIRST SOURCE		1~5	A
OK					
主管：王椅楠		■ 承辦者：林美文			
		□ 測試人：		日期：2002/12/11	
機構		R&D		PM	
		金郁川			
生技		資材		品管	
結果	■合格 □否決 □其它		審核	電子檔,王椅楠 20021211	

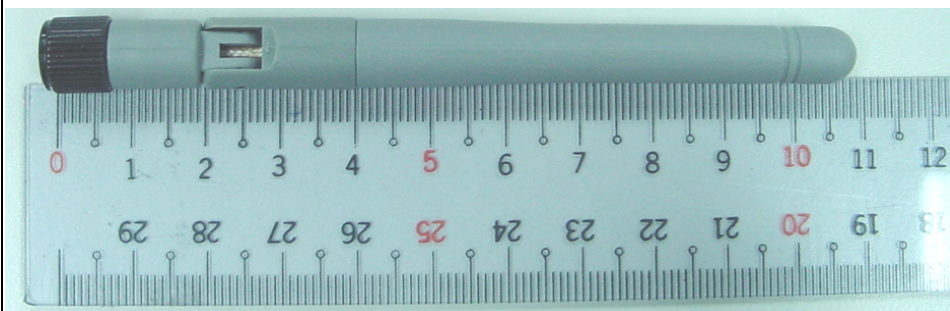

DOC. NO.	7-505924181201		
VERSION.	A		
PAGE/OF	0-1	/	5

[illegible]

APPROVAL SHEET

CUSTOMER：友訊科技股份有限公司
D-LINK Corporation

MODEL NO.：IW-241RS8-120-1

DESCRIPTION：2.4GHz Swivel Antenna

Customer Approval

--	--	--



士誼科技事業有限公司
JOYMAX ELECTRONICS CORP.

桃園縣平鎮市新榮路63巷17號
17, Hsin-Jung Rd., Ping-Chen, Tao-Yuan, Taiwan, R.O.C.
Tel: +886-3-4931401 Fax: +866-3-4931126
E-Mail: ericlai@joymax.com.tw

1.Description:

The Antenna is a swivel and $1/4 \lambda$ dipole antenna. It's useful for the ISM Band of 2.4~2.5 GHz.


2. Electrical Properties

2-1 Frequency Range.....	2.4~2.4835GHz
2-2 Impedance.....	50 Ohms nominal
2-3 SWR.....	≤ 2.0
2-4 Return Loss.....	≤ -9.6 dB
2-5 Gain.....	1.8 dBi
2-6 Polarization.....	Vertical
2-7 Admitted Power.....	1W
2-8 Electrical Wave.....	$1/4 \lambda$ Dipole

3. Mechanical Properties :

3-1 Connector.....	Reverse SMA Plug
3-2 Antenna Cover.....	Polyurethane
Antenna Base.....	Polycarbonate
3-3 Rotating Test.....	≤ 0.5 Kg-cm, After 2000 cycles with the rate of 30 cycles/minute(max.). It shall be possible to remain it's position.



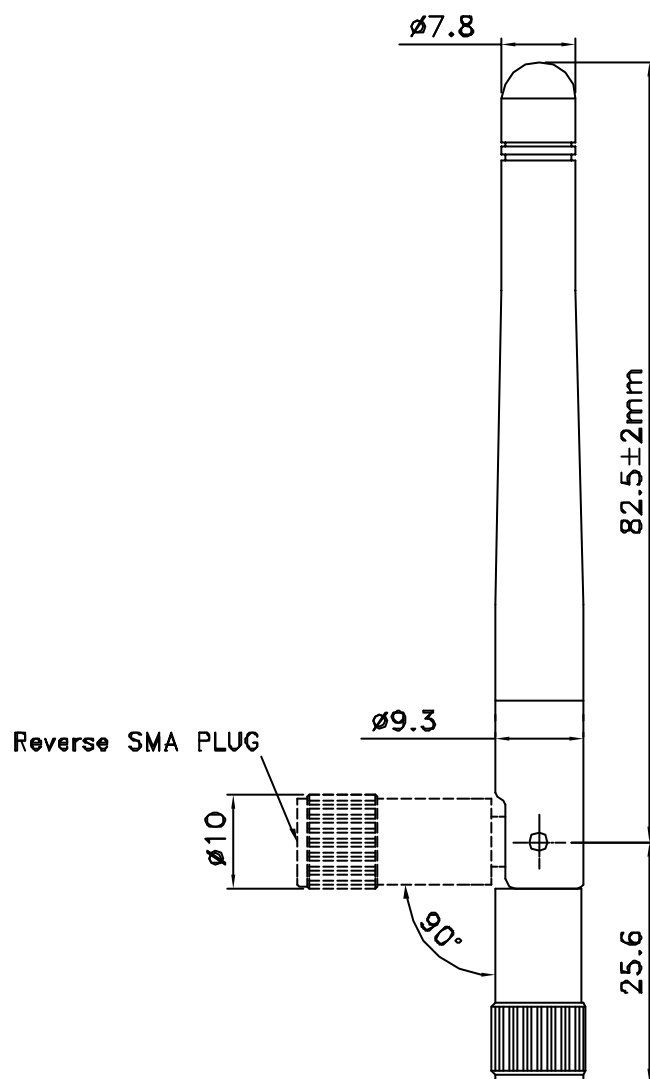

TOLERANCES:	
X	± 1
X.X	± 0.5
X.XX	± 0.25
ANG.	± 2.0°


REV DESCRIPTION		MATERIAL	MODEL: IW-241RS8-120-1		
		FINISH	NAME: Swivel Antenna		
		UNIT: mm	PART No: IW-241RS8-120-1		
		SCALE: 1/ 0.8	DESIGN	APPROVE	REV
		DATE: 11/08/2002	K.Y.Liu		00

QP0502-01-02




JOYMAX ELECTRONICS CORP.

Return Loss

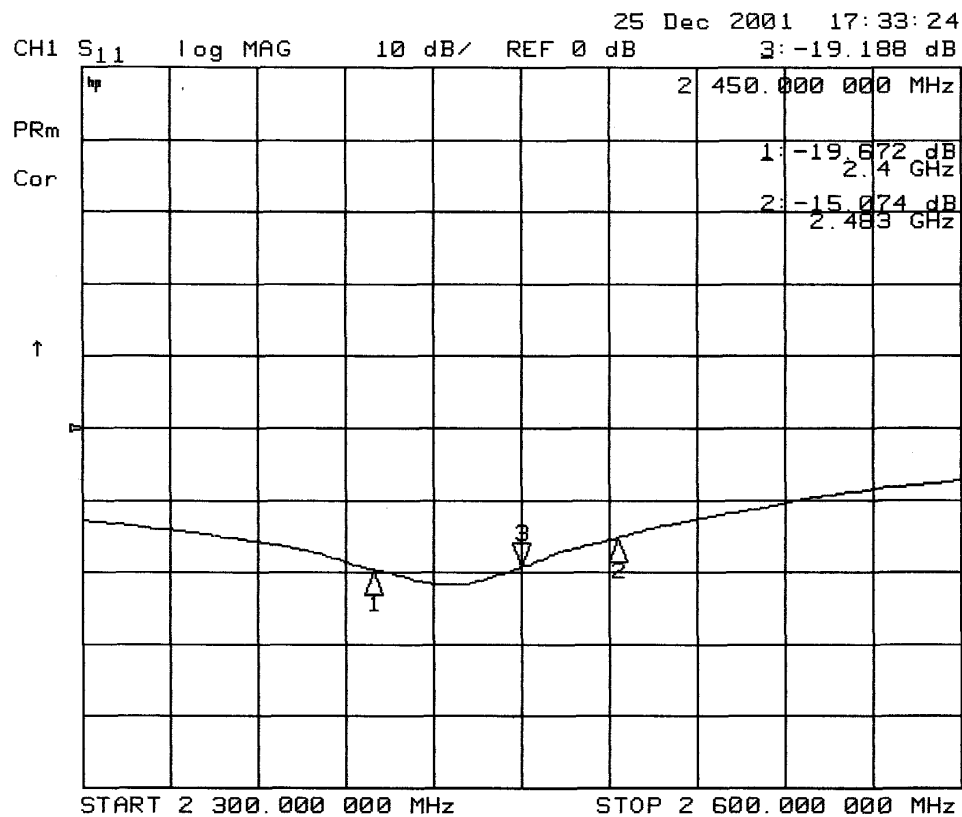

SWR

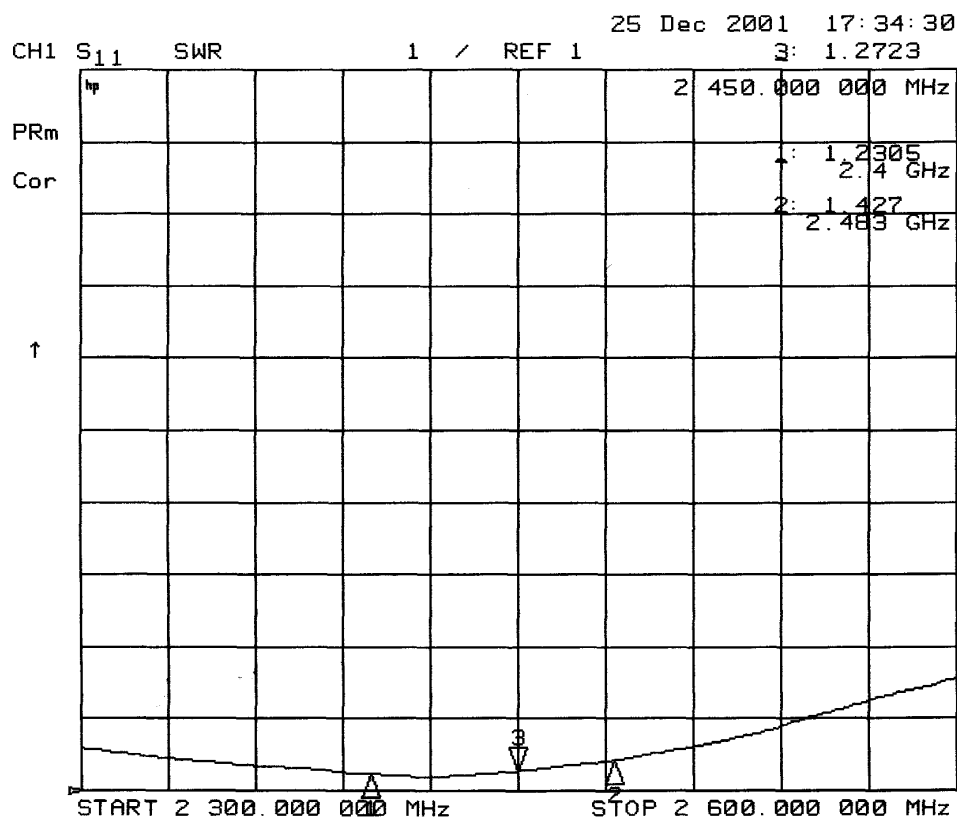

1.Description:

The Connector is a Reverse SMA Plug join on the Antenna.

2. Electrical Properties

2-1 Impedance.....	50 Ohms
2-2 Frequency Range.....	0~8 GHz
2-3 SWR.....	1.1 (Max.)
2-4 Working Voltage.....	≤250 Vrms
2-5 Dielectric Withstanding Voltage.....	≤750 Vrms
2-6 Insulation Resistance.....	≥2000 Megohms
2-7 Contact Resistance.....	Center contact: 3.0 Milliohms (Max.) Outer contact: 2.5 Milliohms (Max.)
2-8 Insertion Loss.....	0.2 dB

3. Mechanical Properties :

- 3-1 Recommended coupling nut torque.. 4.0 in.lbs.~8.8 in.lbs.
- 3-2 Coupling nut retention force..... ≥ 50 lbs.
- 3-3 Contact captivation axial..... ≥ 5 lbs.

4. Environmental Ratings

- 4-1 Operating Temperature..... -65°C ~ +165°C
- 4-2 Thermal Shock..... MIL-STD-202, Method 107, Condition B
- 4-3 Corrosion..... MIL-STD-202, Method 101, Condition B
- 4-4 Shock..... MIL-STD-202, Method 213, Condition I
- 4-5 Vibration..... MIL-STD-202, Method 204, Condition D
- 4-6 Moisture Resistance..... MIL-STD-202, Method 106

5. Material Specifications

- 5-1 Body.....Brass Per JIS H3250 C3604 BD, Black chrome Plated
- 5-2 Contact.....Beryllium Copper Per QQ-C-530, Gold Plated Per MIL-G-45204
- 5-3 Insulator..... PTFE Fluorocarbon Per ASTM D 1710

