



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF110620E02

MODEL NO.: DAP-2565

FCC ID: KA2AP2565A1

RECEIVED: June 20, 2011

TESTED: June 21 to July 04, 2011

ISSUED: Aug 01, 2011

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei
City 114, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 133 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	9
3. GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	13
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	14
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
3.4 DESCRIPTION OF SUPPORT UNITS.....	19
3.5 CONFIGURATION OF SYSTEM UNDER TEST	20
4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)	21
4.1 CONDUCTED EMISSION MEASUREMENT	21
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	21
4.1.2 TEST INSTRUMENTS.....	21
4.1.3 TEST PROCEDURES	22
4.1.4 DEVIATION FROM TEST STANDARD	22
4.1.5 TEST SETUP	23
4.1.6 EUT OPERATING CONDITIONS	23
4.1.7 TEST RESULTS	24
4.2 RADIATED EMISSION MEASUREMENT	26
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	26
4.2.2 TEST INSTRUMENTS.....	27
4.2.3 TEST PROCEDURES	29
4.2.4 DEVIATION FROM TEST STANDARD	29
4.2.5 TEST SETUP	30
4.2.6 EUT OPERATING CONDITIONS	30
4.2.7 TEST RESULTS	31
4.3 6dB BANDWIDTH MEASUREMENT	60
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	60
4.3.2 TEST INSTRUMENTS.....	60
4.3.3 TEST PROCEDURE.....	60
4.3.4 DEVIATION FROM TEST STANDARD	60
4.3.5 TEST SETUP	60
4.3.6 EUT OPERATING CONDITIONS	60
4.3.7 TEST RESULTS	61
4.4 MAXIMUM PEAK OUTPUT POWER.....	65
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	65
4.4.2 INSTRUMENTS.....	65
4.4.3 TEST PROCEDURES	65



4.4.4	DEVIATION FROM TEST STANDARD	65
4.4.5	TEST SETUP	65
4.4.6	EUT OPERATING CONDITIONS	65
4.4.7	TEST RESULTS	66
4.5	POWER SPECTRAL DENSITY MEASUREMENT	68
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	68
4.5.2	TEST INSTRUMENTS.....	68
4.5.3	TEST PROCEDURE.....	68
4.5.4	DEVIATION FROM TEST STANDARD	68
4.5.5	TEST SETUP	68
4.5.6	EUT OPERATING CONDITION.....	68
4.5.7	TEST RESULTS	69
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	73
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	73
4.6.2	TEST INSTRUMENTS.....	73
4.6.3	TEST PROCEDURE.....	73
4.6.4	DEVIATION FROM TEST STANDARD	73
4.6.5	EUT OPERATING CONDITION	73
4.6.6	TEST RESULTS	73
5.	TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band).....	90
5.1	CONDUCTED EMISSION MEASUREMENT	90
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	90
5.1.2	TEST INSTRUMENTS.....	90
5.1.3	TEST PROCEDURES	91
5.1.4	DEVIATION FROM TEST STANDARD	91
5.1.5	TEST SETUP	92
5.1.6	EUT OPERATING CONDITIONS	92
5.1.7	TEST RESULTS	93
5.2	RADIATED EMISSION MEASUREMENT	95
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	95
5.2.2	TEST INSTRUMENTS.....	96
5.2.3	TEST PROCEDURES	98
5.2.4	DEVIATION FROM TEST STANDARD	98
5.2.5	TEST SETUP	99
5.2.6	EUT OPERATING CONDITIONS	99
5.2.7	TEST RESULTS	100
5.3	6dB BANDWIDTH MEASUREMENT	109
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	109
5.3.2	TEST INSTRUMENTS.....	109
5.3.3	TEST PROCEDURE.....	109
5.3.4	DEVIATION FROM TEST STANDARD	109
5.3.5	TEST SETUP	109



A D T

5.3.6	EUT OPERATING CONDITIONS	109
5.3.7	TEST RESULTS	110
5.4	MAXIMUM PEAK OUTPUT POWER.....	113
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	113
5.4.2	INSTRUMENTS.....	113
5.4.3	TEST PROCEDURES	113
5.4.4	DEVIATION FROM TEST STANDARD.....	113
5.4.5	TEST SETUP	113
5.4.6	EUT OPERATING CONDITIONS	113
5.4.7	TEST RESULTS	114
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	115
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	115
5.5.2	TEST INSTRUMENTS.....	115
5.5.3	TEST PROCEDURE.....	115
5.5.4	DEVIATION FROM TEST STANDARD.....	115
5.5.5	TEST SETUP	115
5.5.6	EUT OPERATING CONDITION.....	115
5.5.7	TEST RESULTS	116
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	119
5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	119
5.6.2	TEST INSTRUMENTS.....	119
5.6.3	TEST PROCEDURE.....	119
5.6.4	DEVIATION FROM TEST STANDARD.....	119
5.6.5	EUT OPERATING CONDITION.....	119
5.6.6	TEST RESULTS	119
6.	INFORMATION ON THE TESTING LABORATORIES	132
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	133



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110620E02	Original release	Aug 01, 2011



1. CERTIFICATION

PRODUCT: AIRPREMIER N DUAL BAND, PLENUM-RATED POE
ACCESS POINT POWERED BY CLOUDCOMMAND

BRAND NAME: D-Link

MODEL NO.: DAP-2565

TEST SAMPLE: MASS-PRODUCTION


APPLICANT: D-Link Corporation

TESTED: June 21 to July 04, 2011

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: DAP-2565) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Aug. 01, 2011
(Claire Kuan, Specialist)

APPROVED BY :  , **DATE:** Aug. 01, 2011
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 2.4GHz, 2412~2462MHz Band

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.03dB at 28.078MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.6dB at 4824.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is SMA Plug Straight /Reverse not a standard connector.



A D T

For 5GHz, 5725~5850MHz Band

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.55dB at 0.177MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -3.1dB at 38.25MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is SMA Plug Straight /Reverse not a standard connector.

NOTE:

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.81 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	AIRPREMIER N DUAL BAND, PLENUM-RATED POE ACCESS POINT POWERED BY CLOUDCOMMAND
MODEL NO.	DAP-2565
FCC ID	KA2AP2565A1
POWER SUPPLY	DC 48 from POE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11/5.5/2/1Mbps 802.11a/g: 54/48/36/24/18/12/9/6Mbps HT20 MCS0~7 (800ns GI): 6.5Mbps, 13Mbps, 19.5Mbps, 26Mbps, 39Mbps, 52Mbps, 58.5Mbps, 65Mbps, HT20 MCS8~15 (800ns GI): 13Mbps, 26Mbps, 39Mbps, 52Mbps, 78Mbps, 104Mbps, 117Mbps, 130Mbps. HT40 MCS0~7 (800ns GI): 13.5Mbps, 27Mbps, 40.5Mbps, 54Mbps, 81Mbps, 108Mbps, 121.5Mbps, 135Mbps. HT40 MCS8~15 (800ns GI): 27Mbps, 54Mbps, 81Mbps, 108Mbps, 162Mbps, 216Mbps, 243Mbps, 270Mbps. HT20 MCS0~7 (400ns GI): 7.2Mbps, 14.4Mbps, 21.7Mbps, 28.9Mbps, 43.3Mbps, 57.8Mbps, 65.0Mbps, 72.2Mbps, HT20 MCS8~15 (400ns GI): 14.444Mbps, 28.889Mbps, 43.333Mbps, 57.778Mbps, 86.667Mbps, 115.556Mbps, 130.000Mbps, 144.444Mbps. HT40 MCS0~7 (400ns GI): 15.0Mbps, 30.0Mbps, 45.0Mbps, 60.0Mbps, 90.0Mbps, 120.0Mbps, 135.0Mbps, 150.0Mbps, HT40 MCS8~15 (400ns GI): 30.0Mbps, 60.0Mbps, 90.0Mbps, 120.0Mbps, 180.0Mbps, 240.0Mbps, 270.0Mbps, 300.0Mbps.
OPERATING FREQUENCY	For 15.407 802.11a: 5.18 ~ 5.24GHz For 15.247 802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.745 ~ 5.825GHz



A D T

NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
	For 15.247(2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
	For 15.247(5GHz) 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 14.5mW 802.11n (20MHz): 25.8mW 802.11n (40MHz): 44.3mW
	For 15.247(2.4GHz) 802.11b: 186.7mW 802.11g: 463.5mW 802.11n (20MHz): 485.4mW 802.11n (40MHz): 303.4mW
	For 15.247(5GHz) 802.11a: 453.0mW 802.11n (20MHz): 386.1mW 802.11n (40MHz): 405.0mW
ANTENNA TYPE	Please see note
DATA CABLE	Ethernet cable (Unshielded, 1.5m)
I/O PORTS	LAN port x 1(10/100/1000Mbps)
ASSOCIATED DEVICES	Adapter x 1
	POE x 1

NOTE:

1. There are two antennas provided to this EUT, please refer to the following table:

Transmitter Circuit	Brand	Model	Gain (dBi) include cable loss	Antenna Type	Connector
Chain (0)	WHA YU GROUP	C037-511111-A(SSR-10963)	2.4G: 3.5dBi 5G : 6dBi	Dipole	SMA Plug Straight /Reverse
Chain (1)	WHA YU GROUP	C037-511111-A(SSR-10963)	2.4G: 3.5dBi 5G : 6dBi	Dipole	SMA Plug Straight /Reverse

2. 2.4GHz and 5GHz technology cannot transmit at same time.

3. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Laying-flat type
Mode B	Stand-up type

From the above modes, the worst radiated test was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

4. The EUT must be supplied with a PoE as following table:

PoE	
BRAND	Base-Unit
MODEL	EBU-101G-T2 LF
OUTPUT POWER	DC 48V, 0.4A
* ADAPTER (use only with PoE)	
	BRAND: Bothhand Enterprise Inc.
	MODEL: SA06-20S48-V
	INPUT POWER: AC 100-240V, 0.6A, 50-60Hz
	1.85 m unshielded without core.
	OUTPUT POWER: DC 48V, 0.4A
	1.8 m unshielded with one core.

5. The EUT incorporates CDD function with 802.11a, 802.11b, 802.11g and MIMO function with 802.11n.

6. The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function.

7. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.

8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

Operated in 5725 ~ 5850MHz band:

Five channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	TX CHAIN(0)	TX CHAIN(1)
A	802.11 b	√	√
B	802.11 g	√	√
C	802.11 a	√	√
D	802.11n(20MHz) for MCS0~15	√	√
E	802.11n(40MHz) for MCS0~15	√	√

Note: 1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
For 2.4 GHz 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5	D
For 5 GHz 802.11n (20MHz)	149 to 165	149	OFDM	BPSK	6.5	C



A D T

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
For 2.4 GHz 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5	D
For 5 GHz 802.11n (20MHz)	149 to 165	149	OFDM	BPSK	6.5	C

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	D
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5	E
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6	C
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5	D
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5	E



A D T

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 11	OFDM	BPSK	6	B
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5	D
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	13.5	E
802.11a	149 to 165	149, 165	OFDM	BPSK	6	C
For 5 GHz 802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	6.5	D
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5	E

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	D
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5	E
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6	C
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5	D
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5	E

※ Bandwidth as show worst chain in report base on preliminary measurement.



A D T

※ **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	25deg. C, 69%RH, 1003 hPa	120Vac, 60Hz	Kent Liu
RE<1G	26deg. C, 69%RH, 1003 hPa	120Vac, 60Hz	Rex Huang
PLC	27deg. C, 70%RH, 1003 hPa	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH, 1003 hPa	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH, 1003 hPa	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166-5CA-0448	PIW632500516610

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP cable

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

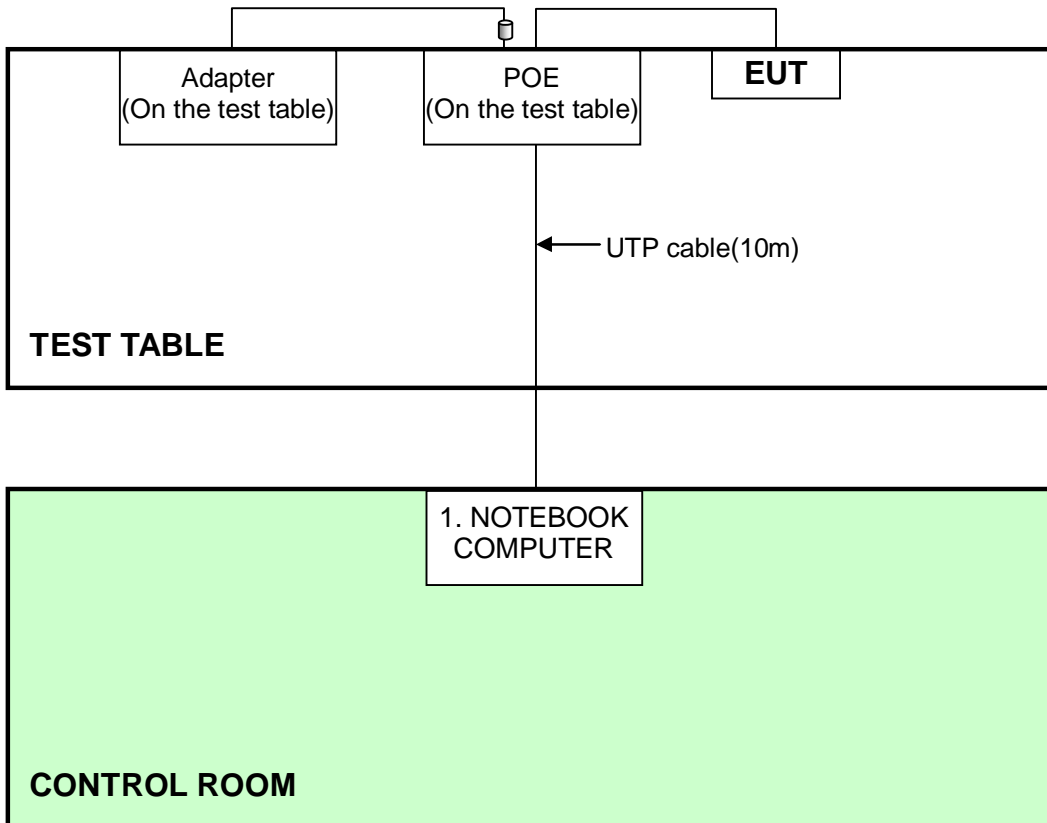

4. TEST TYPES AND RESULTS (For 2400 ~ 2483.5MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Test date: June 21, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 02, 2011	Mar. 01, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 17, 2010	Sep. 16, 2011
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 10, 2011	June 09, 2012
RF Cable (JYEBAO)	5DFB	CONCAB-003	Aug. 06, 2010	Aug. 05, 2011
50 ohms Terminator	50	3	Nov. 03, 2010	Nov. 02, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

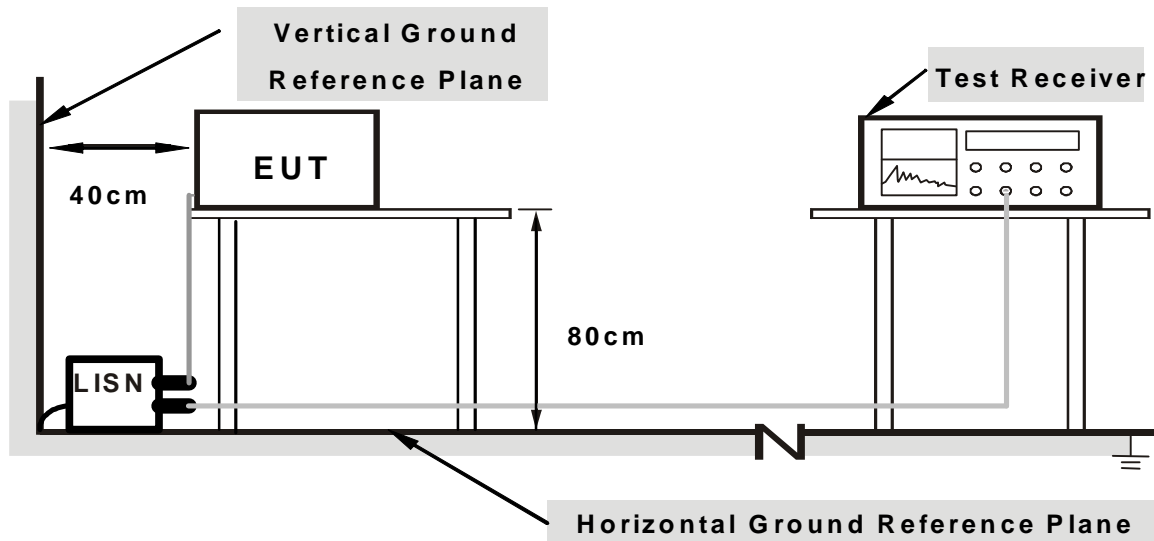

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. The communication partner run test program “ART R0.7B16” to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.37	52.90	39.73	53.27	40.10	66.00	56.00	-12.73	-15.90
2	0.166	0.36	51.52	34.39	51.88	34.75	65.18	55.18	-13.29	-20.42
3	0.193	0.36	46.52	33.05	46.88	33.41	63.91	53.91	-17.03	-20.50
4	0.369	0.36	43.27	31.53	43.63	31.89	58.53	48.53	-14.90	-16.64
5	4.555	0.53	37.27	29.99	37.80	30.52	56.00	46.00	-18.20	-15.48
6	27.973	1.49	37.05	36.38	38.54	37.87	60.00	50.00	-21.46	-12.13


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

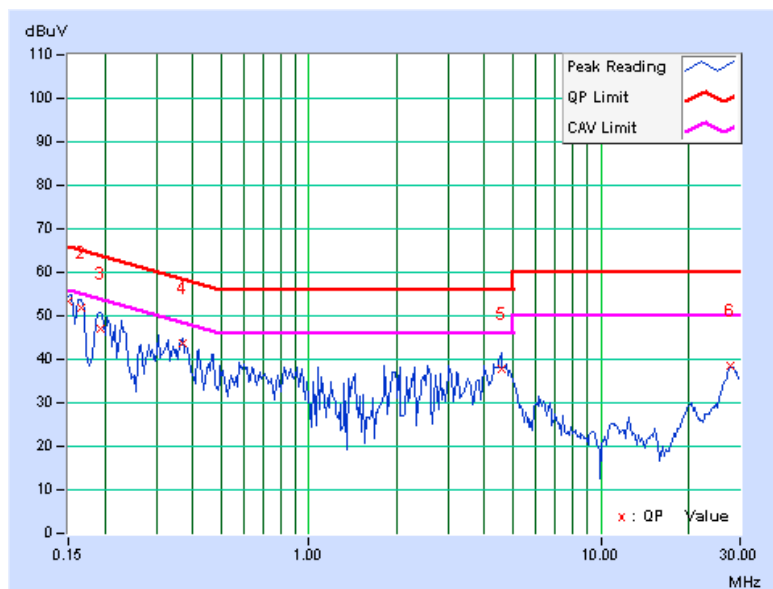

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	51.94	36.93	52.04	37.03	65.38	55.38	-13.34	-18.35
2	0.193	0.10	45.92	32.27	46.02	32.37	63.91	53.91	-17.89	-21.54
3	0.334	0.11	38.54	30.76	38.65	30.87	59.36	49.36	-20.71	-18.49
4	0.500	0.12	27.88	15.58	28.00	15.70	56.00	46.00	-28.00	-30.30
5	4.551	0.26	34.78	28.70	35.04	28.96	56.00	46.00	-20.96	-17.04
6	28.078	1.89	36.23	36.08	38.12	37.97	60.00	50.00	-21.88	-12.03

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

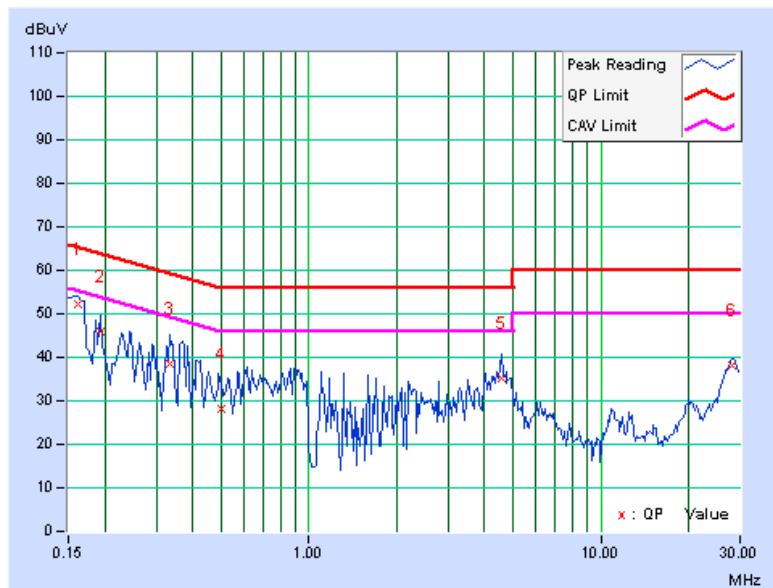

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

4.2.2 TEST INSTRUMENTS

For below 1GHz test: (Test date: July 01, 2011)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 23, 2010	Aug. 22, 2011
Agilent Pre-Selector	N9039A	MY46520310	Aug. 23, 2010	Aug. 22, 2011
Agilent Signal Generator	N5181A	MY49060347	July 30, 2010	July 29, 2011
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 22, 2010	Nov. 21, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 28, 2010	Dec. 27, 2011
RF Cable	NA	CHHCAB_001	NA	NA
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.



A D T

For above 1GHz test: (Test date: July 04, 2011)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011
Agilent PSA Spectrum Analyzer	E4446A	MY48250113	Nov. 30 , 2010	Nov. 29 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 01, 2010	Oct. 31, 2011
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 14, 2011	Apr. 13, 2012
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2010	Dec. 16, 2011
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 17, 2011	Jan. 16, 2012
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M- 1GHz	NA	NA
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for below 1GHz test and 10 meter open field site for above 1GHz test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

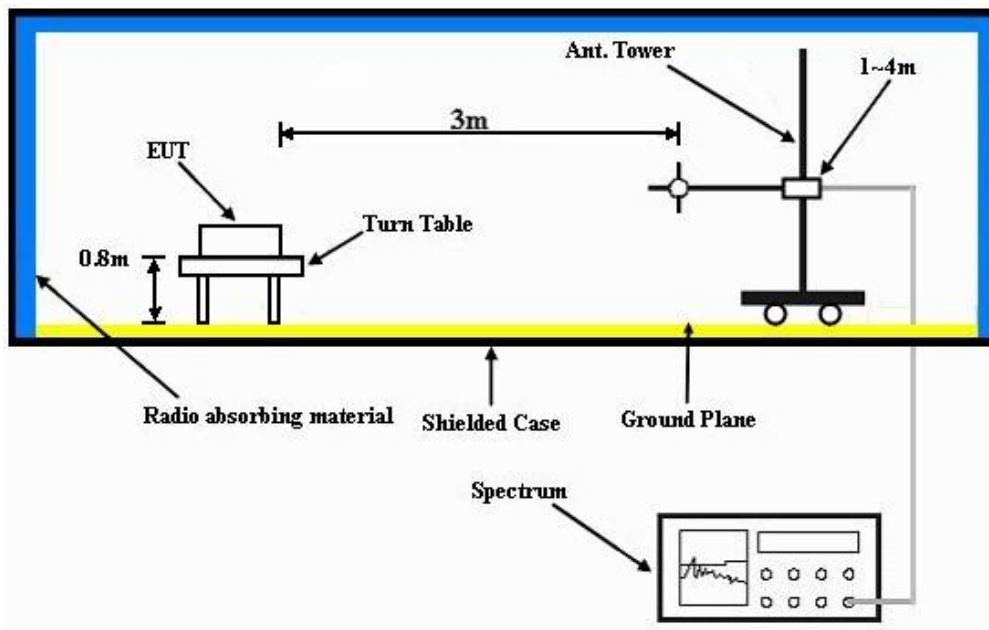

<Frequency Range above 1GHz>

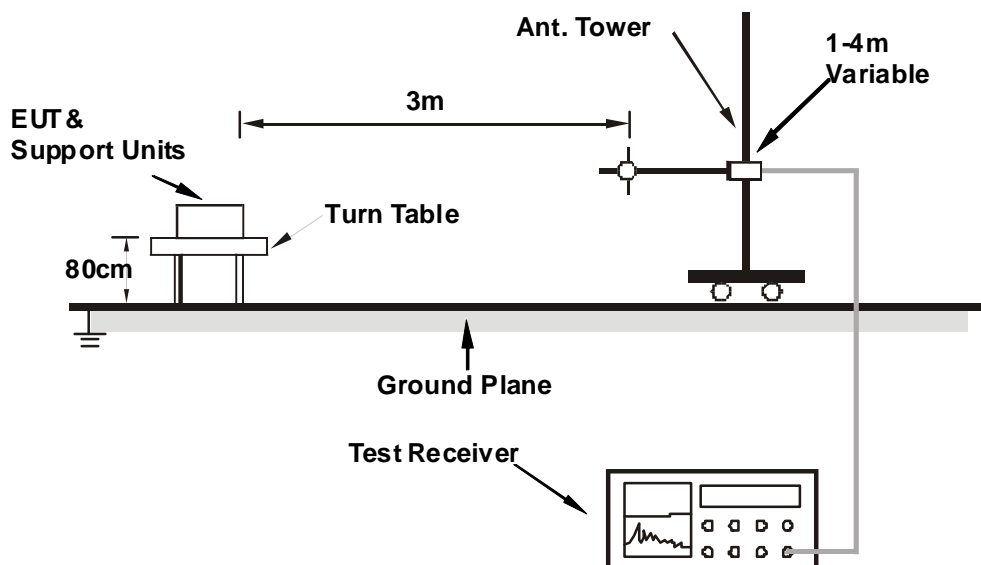

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 69%RH 1003 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.03	34.2 QP	43.5	-9.3	1.00 H	183	25.18	8.98
2	146.29	33.3 QP	43.5	-10.2	1.10 H	59	18.95	14.34
3	211.66	34.9 QP	43.5	-8.6	1.00 H	311	23.24	11.64
4	375.08	39.4 QP	46.0	-6.6	1.00 H	243	22.64	16.79
5	500.02	34.3 QP	46.0	-11.7	1.50 H	257	14.73	19.53
6	750.13	25.6 QP	46.0	-20.4	1.00 H	226	2.29	23.27
7	875.06	31.1 QP	46.0	-14.9	1.00 H	341	5.65	25.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.25	36.1 QP	40.0	-3.9	1.00 V	167	22.35	13.78
2	135.28	33.4 QP	43.5	-10.1	1.00 V	103	19.75	13.68
3	249.91	35.7 QP	46.0	-10.3	1.00 V	137	22.63	13.04
4	375.00	40.8 QP	46.0	-5.2	1.00 V	234	24.03	16.79
5	500.02	39.4 QP	46.0	-6.6	1.00 V	353	19.89	19.53
6	875.06	28.2 QP	46.0	-17.8	1.00 V	134	2.69	25.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



ABOVE 1GHz WORST-CASE DATA

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.40	53.5 PK	74.0	-20.5	1.18 H	96	21.85	31.65
2	2386.40	41.9 AV	54.0	-12.1	1.18 H	96	10.25	31.65
3	*2412.00	99.3 PK			1.20 H	38	67.57	31.73
4	*2412.00	96.6 AV			1.20 H	38	64.87	31.73
5	4824.00	50.6 PK	74.0	-23.4	1.29 H	334	11.63	38.97
6	4824.00	48.5 AV	54.0	-5.5	1.29 H	334	9.53	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.27 V	10	26.54	31.66
2	2390.00	46.4 AV	54.0	-7.6	1.27 V	10	14.74	31.66
3	*2412.00	113.9 PK			1.39 V	86	82.17	31.73
4	*2412.00	110.9 AV			1.39 V	86	79.17	31.73
5	4824.00	55.7 PK	74.0	-18.3	1.38 V	55	16.73	38.97
6	4824.00	53.4 AV	54.0	-0.6	1.38 V	55	14.43	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.5 PK			1.26 H	43	66.69	31.81
2	*2437.00	96.1 AV			1.26 H	43	64.29	31.81
3	4874.00	50.8 PK	74.0	-23.2	1.34 H	341	11.66	39.14
4	4874.00	48.5 AV	54.0	-5.5	1.34 H	341	9.36	39.14
5	7311.00	51.6 PK	74.0	-22.4	1.13 H	230	4.97	46.63
6	7311.00	43.2 AV	54.0	-10.8	1.13 H	230	-3.43	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.6 PK			1.34 V	85	82.79	31.81
2	*2437.00	112.0 AV			1.34 V	85	80.19	31.81
3	4874.00	54.8 PK	74.0	-19.2	1.10 V	62	15.66	39.14
4	4874.00	53.2 AV	54.0	-0.8	1.10 V	62	14.06	39.14
5	7311.00	50.1 PK	74.0	-23.9	1.10 V	123	3.47	46.63
6	7311.00	41.2 AV	54.0	-12.8	1.10 V	123	-5.43	46.63

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.6 PK			1.20 H	36	68.71	31.89
2	*2462.00	98.0 AV			1.20 H	36	66.11	31.89
3	2483.50	55.1 PK	74.0	-18.9	1.16 H	32	23.13	31.97
4	2483.50	42.8 AV	54.0	-11.2	1.16 H	32	10.83	31.97
5	4924.00	50.9 PK	74.0	-23.1	1.35 H	334	11.59	39.31
6	4924.00	48.7 AV	54.0	-5.3	1.35 H	334	9.39	39.31
7	7386.00	51.5 PK	74.0	-22.5	1.14 H	240	4.90	46.60
8	7386.00	42.9 AV	54.0	-11.1	1.14 H	240	-3.70	46.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.7 PK			1.59 V	12	82.81	31.89
2	*2462.00	112.9 AV			1.59 V	12	81.01	31.89
3	2483.50	60.1 PK	74.0	-13.9	1.91 V	148	28.13	31.97
4	2483.50	50.4 AV	54.0	-3.6	1.91 V	148	18.43	31.97
5	4924.00	54.6 PK	74.0	-19.4	1.19 V	130	15.29	39.31
6	4924.00	53.1 AV	54.0	-0.9	1.19 V	130	13.79	39.31
7	7386.00	51.6 PK	74.0	-22.4	1.19 V	130	5.00	46.60
8	7386.00	43.4 AV	54.0	-10.6	1.19 V	130	-3.20	46.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

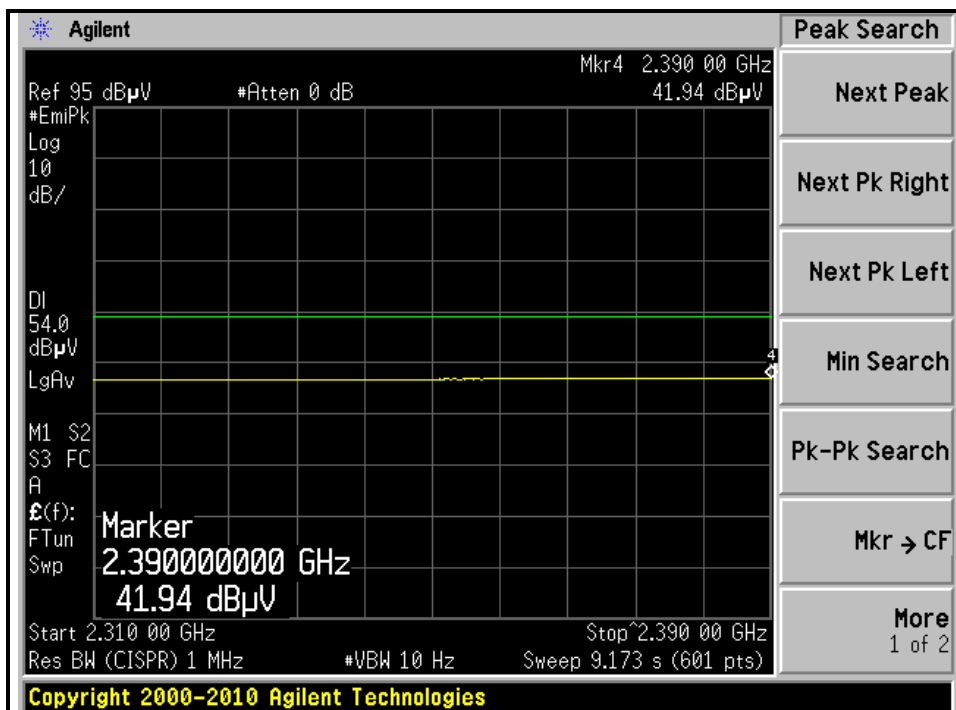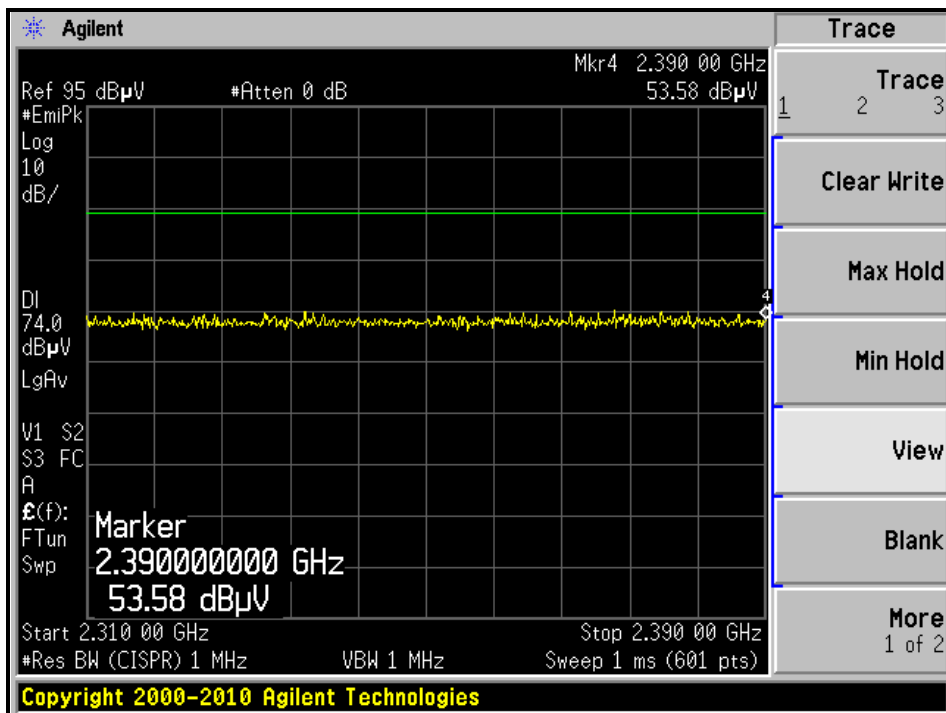





A D T

RESTRICTED BANDEDGE (802.11b MODE, CH1, VERTICAL)

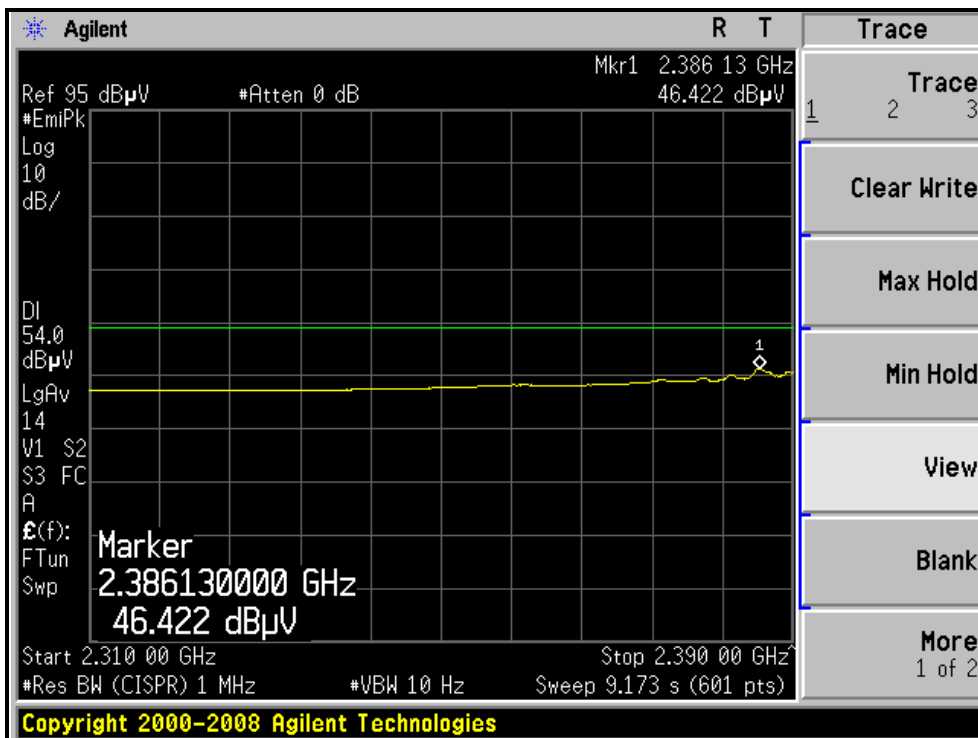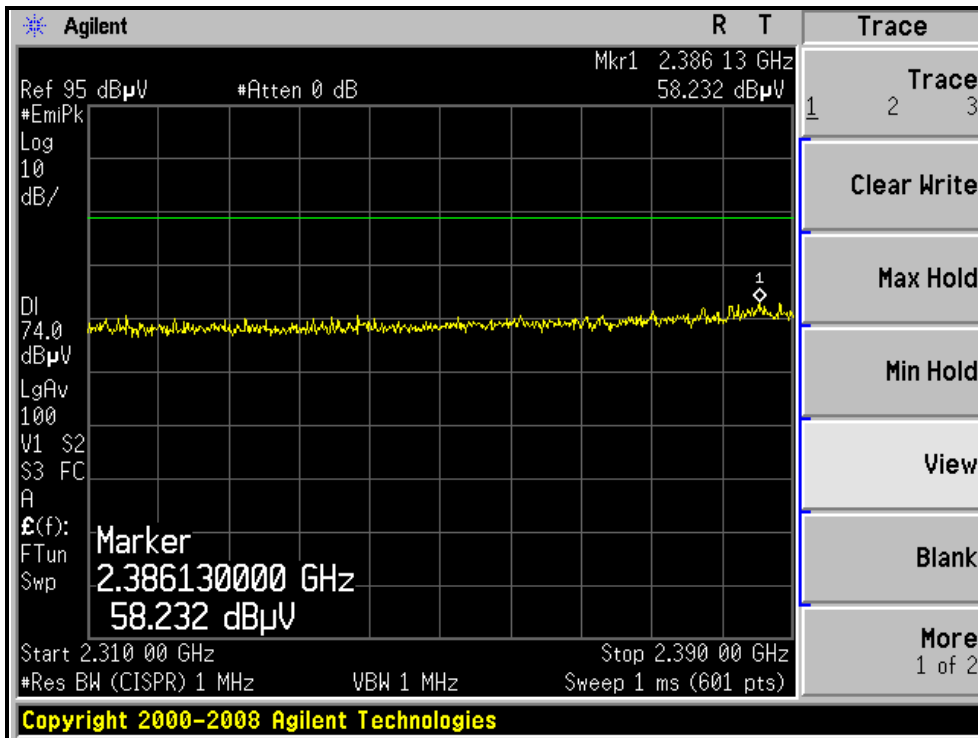



RESTRICTED BANDEDGE (802.11b MODE, CH11, HORIZONTAL)

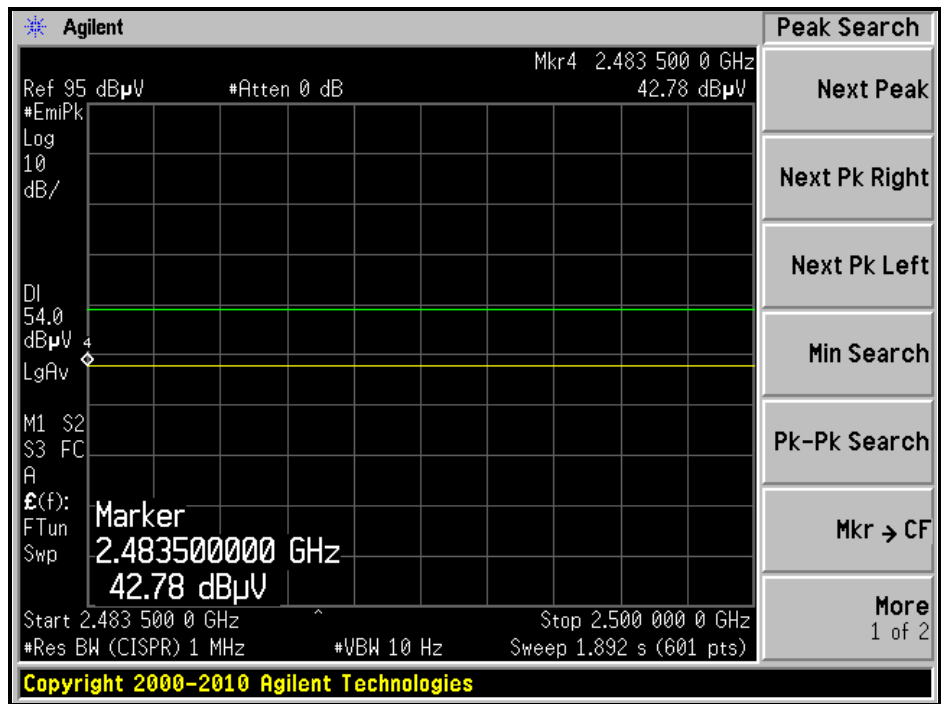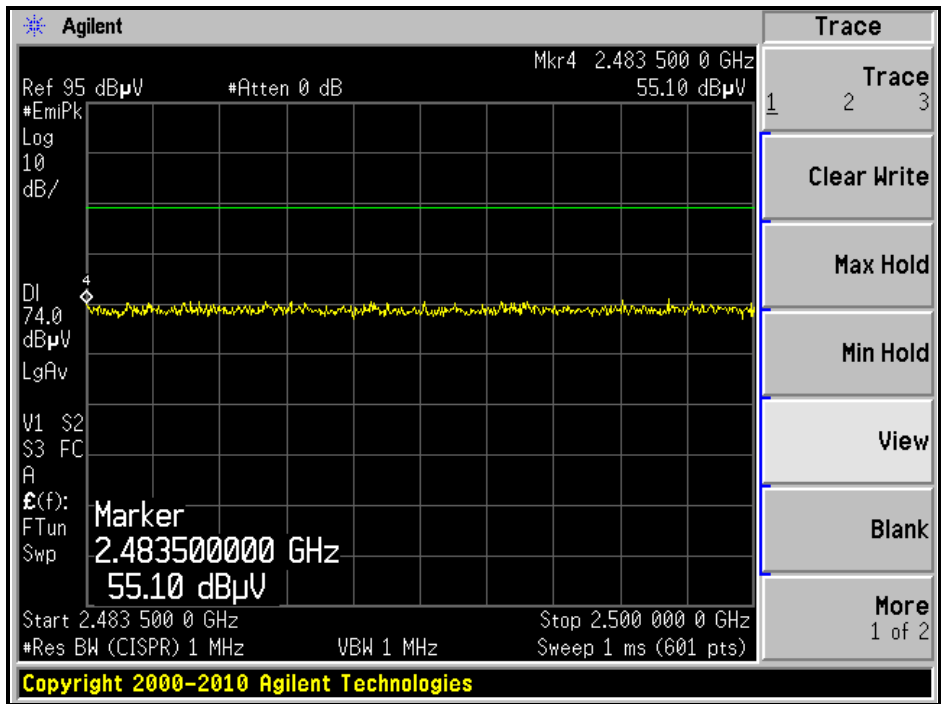



A D T

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

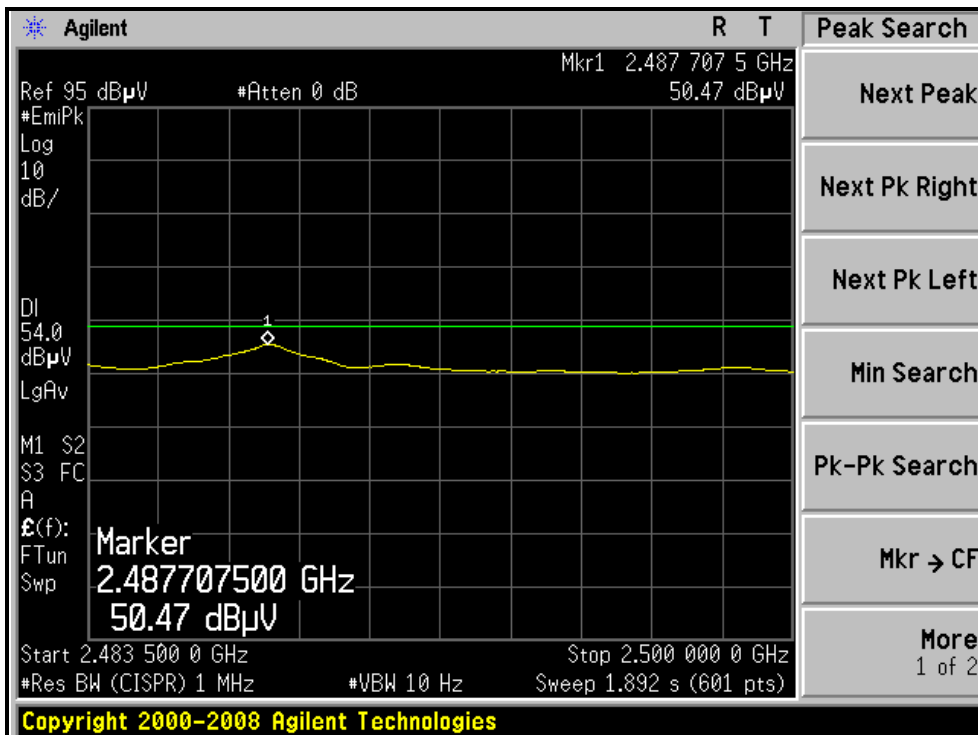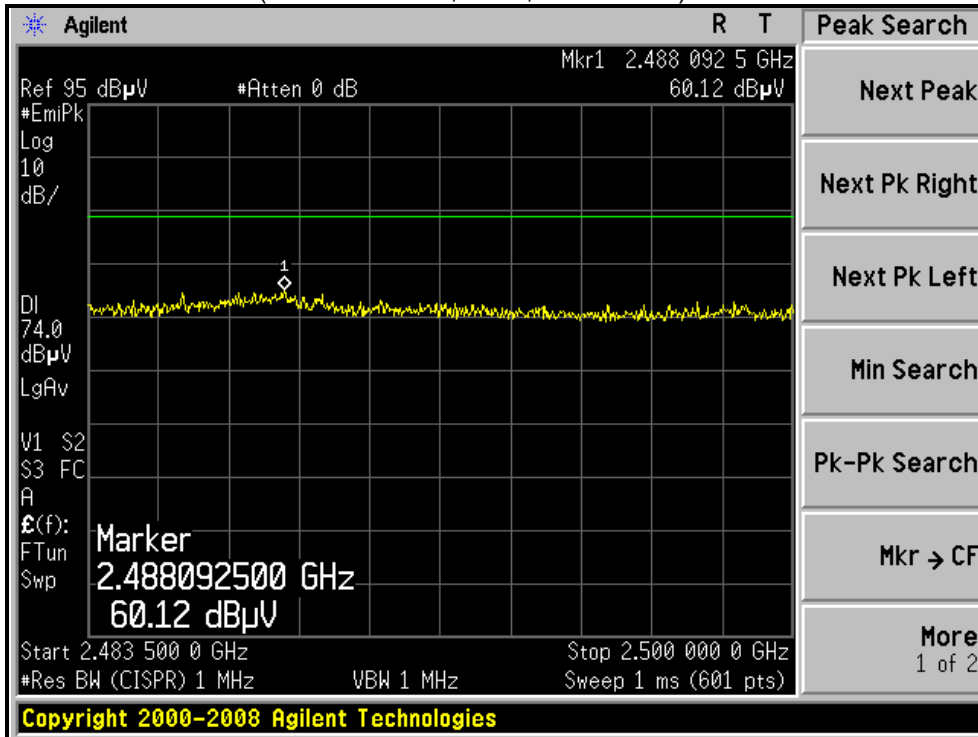



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.18 H	43	24.24	31.66
2	2390.00	43.2 AV	54.0	-10.8	1.18 H	43	11.54	31.66
3	*2412.00	99.2 PK			1.18 H	35	67.47	31.73
4	*2412.00	89.6 AV			1.18 H	35	57.87	31.73
5	4824.00	45.9 PK	74.0	-28.1	1.33 H	342	6.93	38.97
6	4824.00	33.2 AV	54.0	-20.8	1.33 H	342	-5.77	38.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.3 PK	74.0	-3.7	1.03 V	61	38.64	31.66
2	2390.00	53.2 AV	54.0	-0.8	1.03 V	61	21.54	31.66
3	*2412.00	114.0 PK			1.00 V	226	82.27	31.73
4	*2412.00	104.5 AV			1.00 V	226	72.77	31.73
5	4824.00	46.6 PK	74.0	-27.4	1.27 V	196	7.63	38.97
6	4824.00	34.5 AV	54.0	-19.5	1.27 V	196	-4.47	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.3 PK			1.18 H	35	71.49	31.81
2	*2437.00	93.8 AV			1.18 H	35	61.99	31.81
3	4874.00	46.4 PK	74.0	-27.6	1.30 H	350	7.26	39.14
4	4874.00	33.5 AV	54.0	-20.5	1.30 H	350	-5.64	39.14
5	7311.00	51.3 PK	74.0	-22.7	1.12 H	254	4.67	46.63
6	7311.00	42.6 AV	54.0	-11.4	1.12 H	254	-4.03	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.2 PK			1.34 V	73	86.39	31.81
2	*2437.00	108.5 AV			1.34 V	73	76.69	31.81
3	2483.50	67.5 PK	74.0	-6.5	1.56 V	74	35.53	31.97
4	2483.50	51.7 AV	54.0	-2.3	1.56 V	74	19.73	31.97
5	4874.00	46.8 PK	74.0	-27.2	1.50 V	199	7.66	39.14
6	4874.00	35.1 AV	54.0	-18.9	1.50 V	199	-4.04	39.14
7	7311.00	49.5 PK	74.0	-24.5	1.32 V	141	2.87	46.63
8	7311.00	37.1 AV	54.0	-16.9	1.32 V	141	-9.53	46.63

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.6 PK			1.16 H	35	67.71	31.89
2	*2462.00	89.9 AV			1.16 H	35	58.01	31.89
3	2483.50	57.0 PK	74.0	-17.0	1.20 H	33	25.03	31.97
4	2483.50	43.7 AV	54.0	-10.3	1.20 H	33	11.73	31.97
5	4924.00	46.4 PK	74.0	-27.6	1.35 H	354	7.09	39.31
6	4924.00	33.3 AV	54.0	-20.7	1.35 H	354	-6.01	39.31
7	7386.00	51.5 PK	74.0	-22.5	1.10 H	247	4.90	46.60
8	7386.00	42.9 AV	54.0	-11.1	1.10 H	247	-3.70	46.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.8 PK			1.33 V	91	80.91	31.89
2	*2462.00	103.1 AV			1.33 V	91	71.21	31.89
3	2483.50	68.8 PK	74.0	-5.2	1.45 V	216	36.83	31.97
4	2483.50	52.6 AV	54.0	-1.4	1.45 V	216	20.63	31.97
5	4924.00	46.9 PK	74.0	-27.1	1.23 V	197	7.59	39.31
6	4924.00	32.2 AV	54.0	-21.8	1.23 V	197	-7.11	39.31
7	7386.00	49.4 PK	74.0	-24.6	1.30 V	149	2.80	46.60
8	7386.00	36.9 AV	54.0	-17.1	1.30 V	149	-9.70	46.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

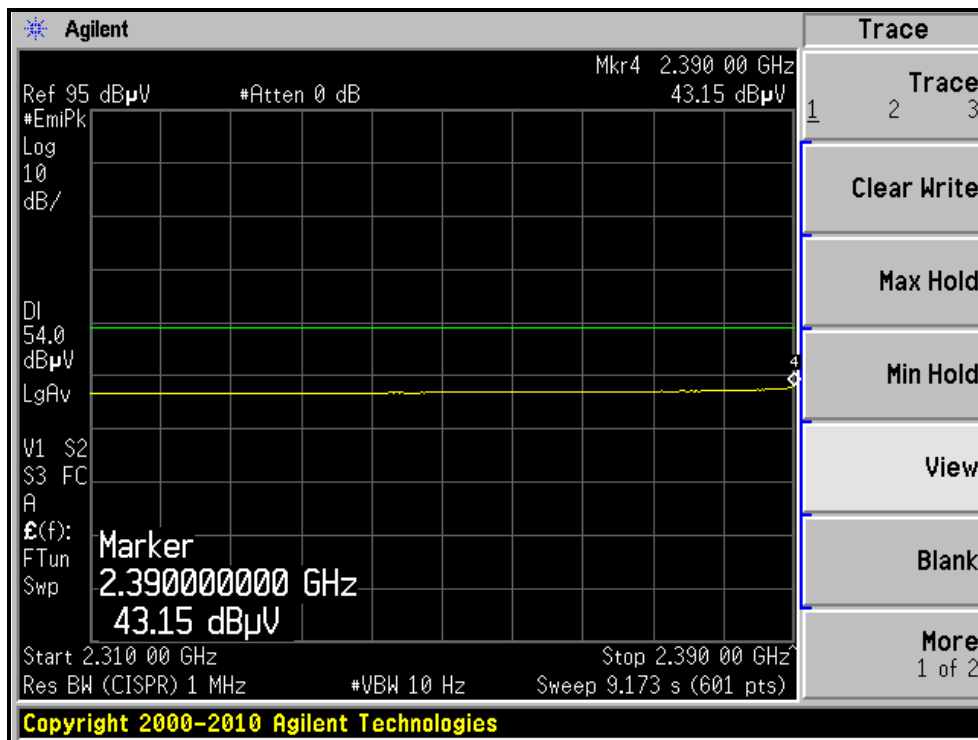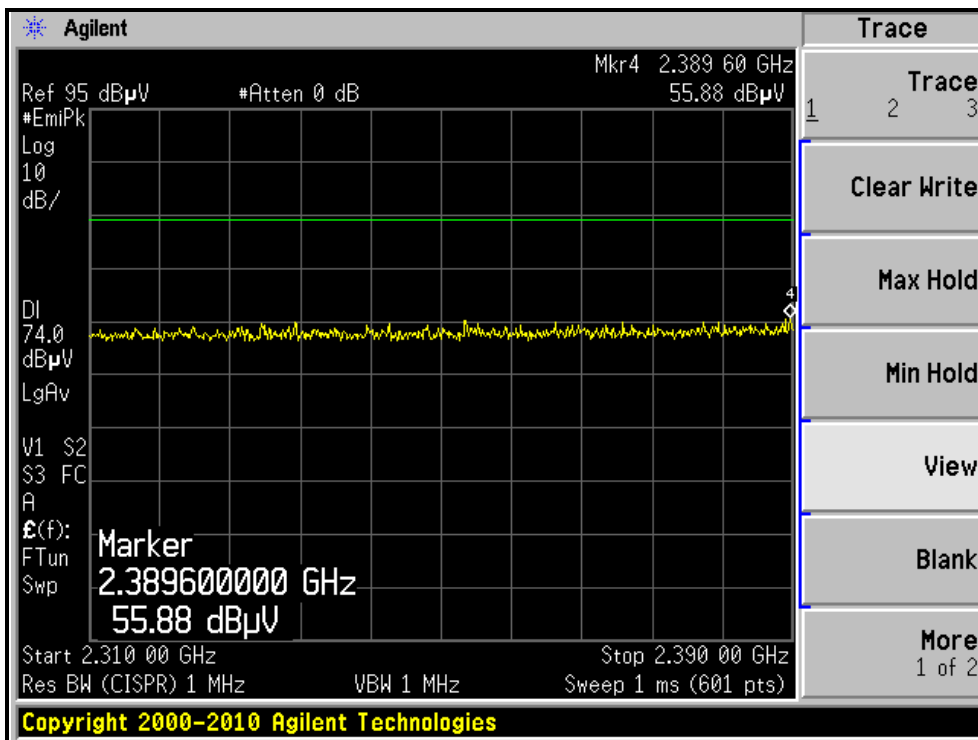



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

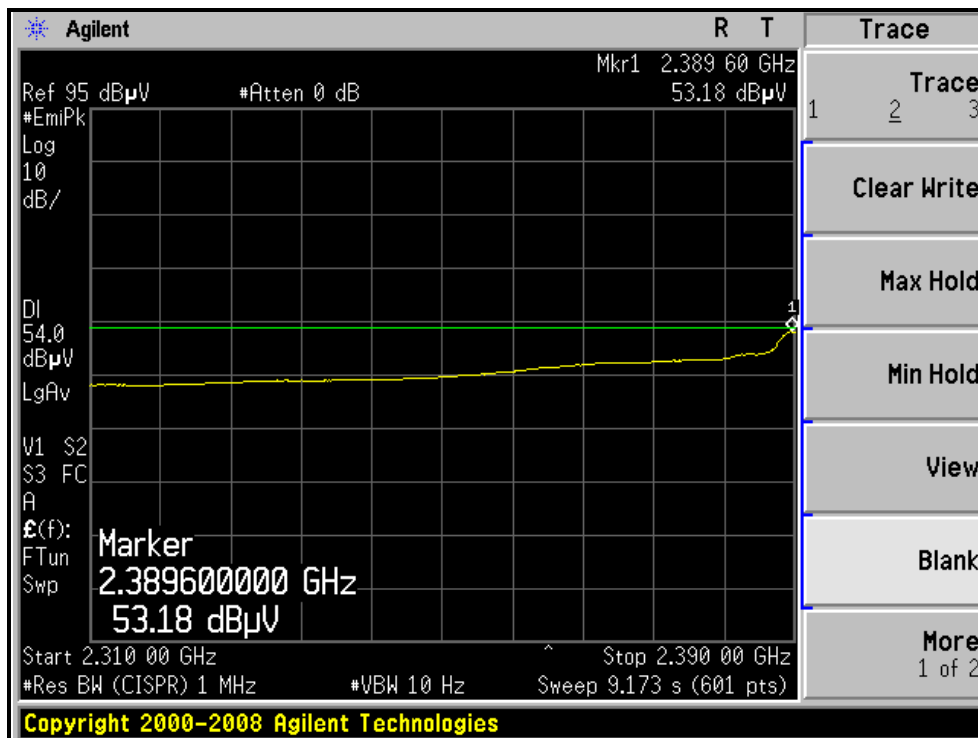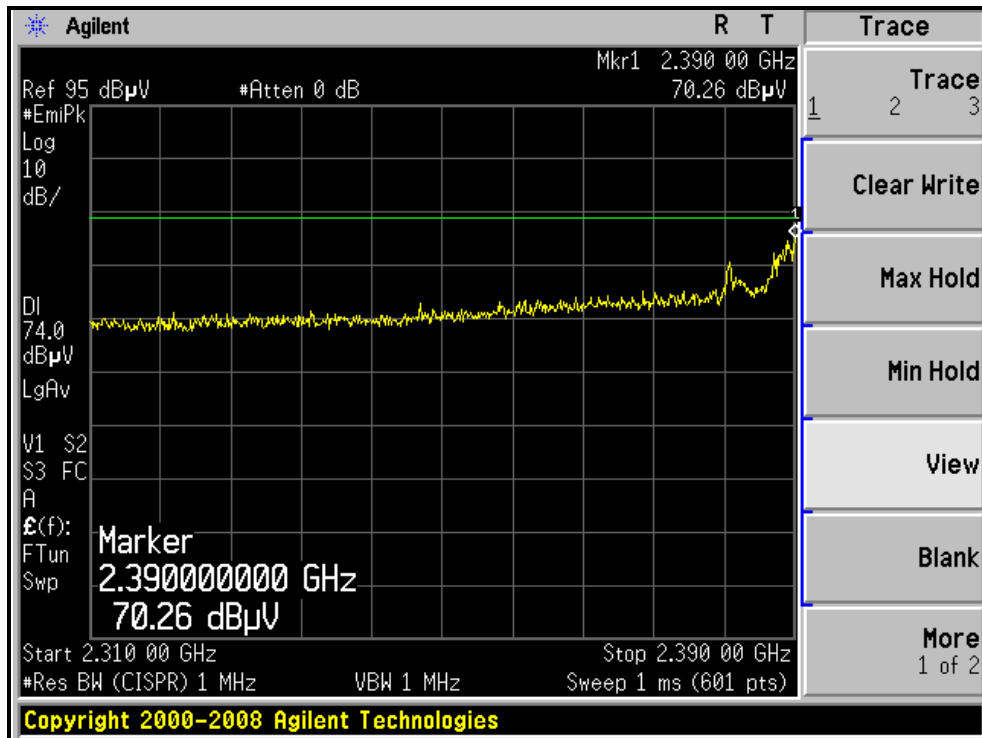



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

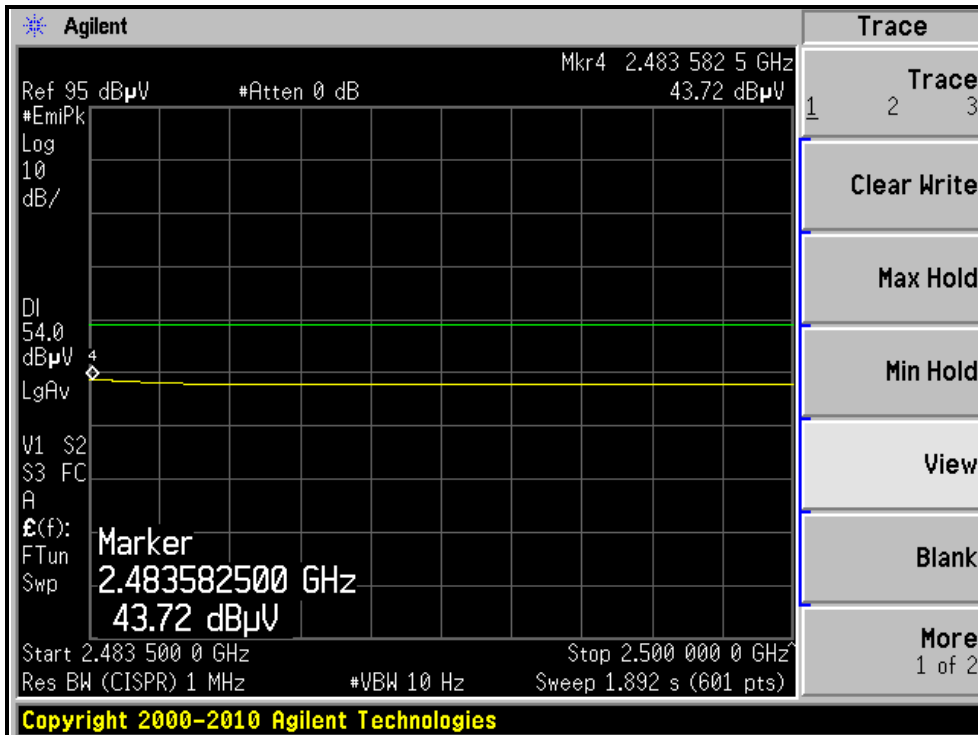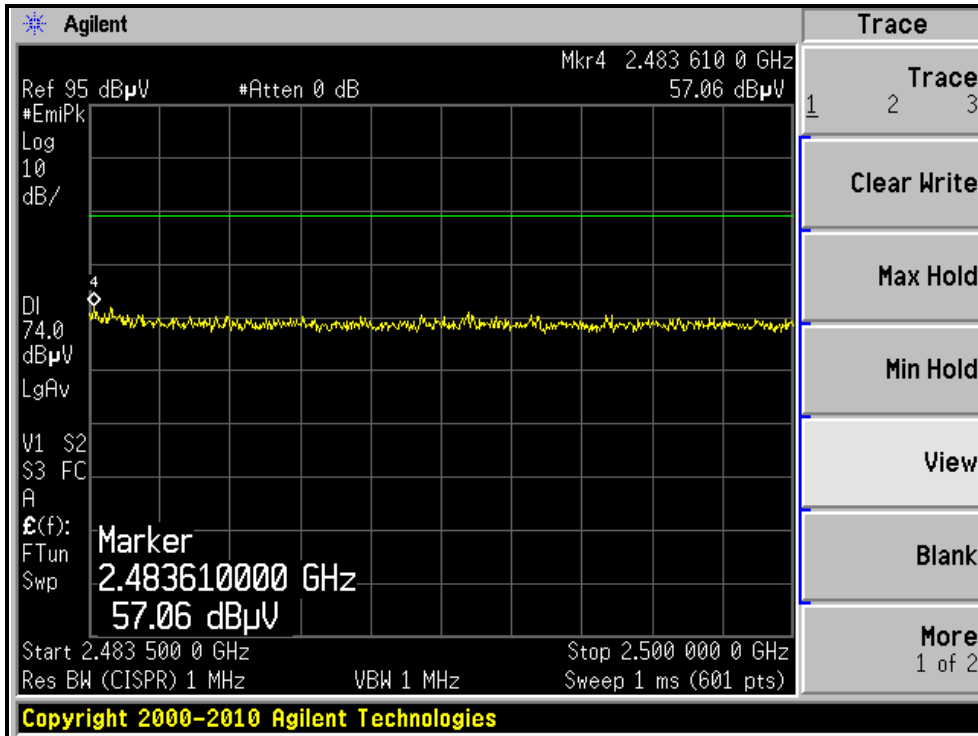



A D T

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

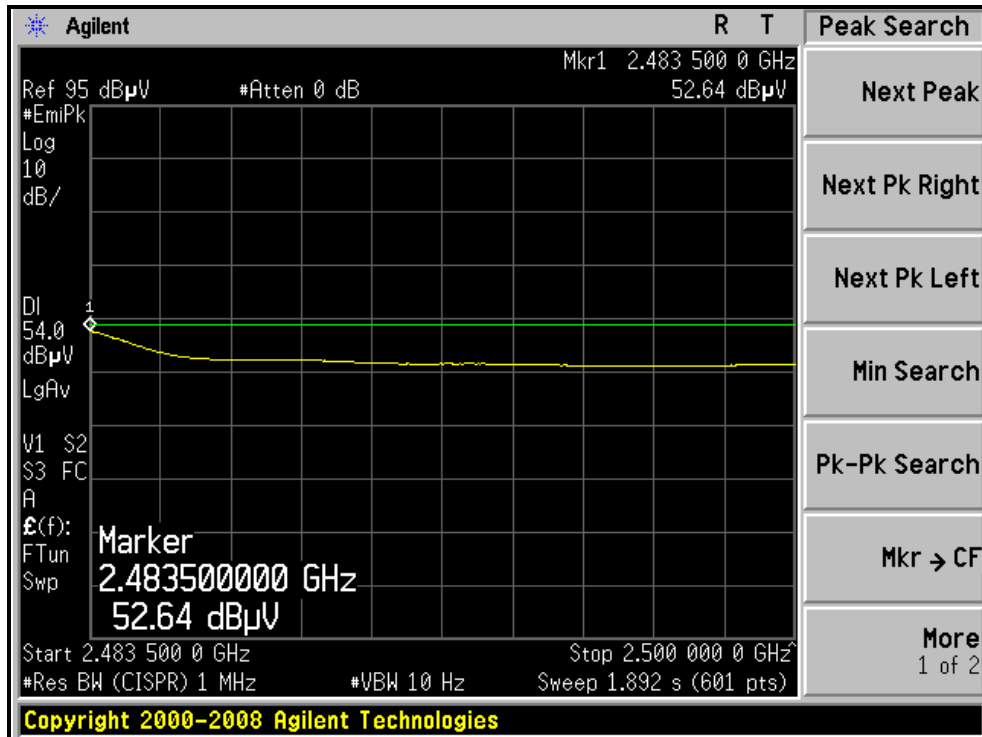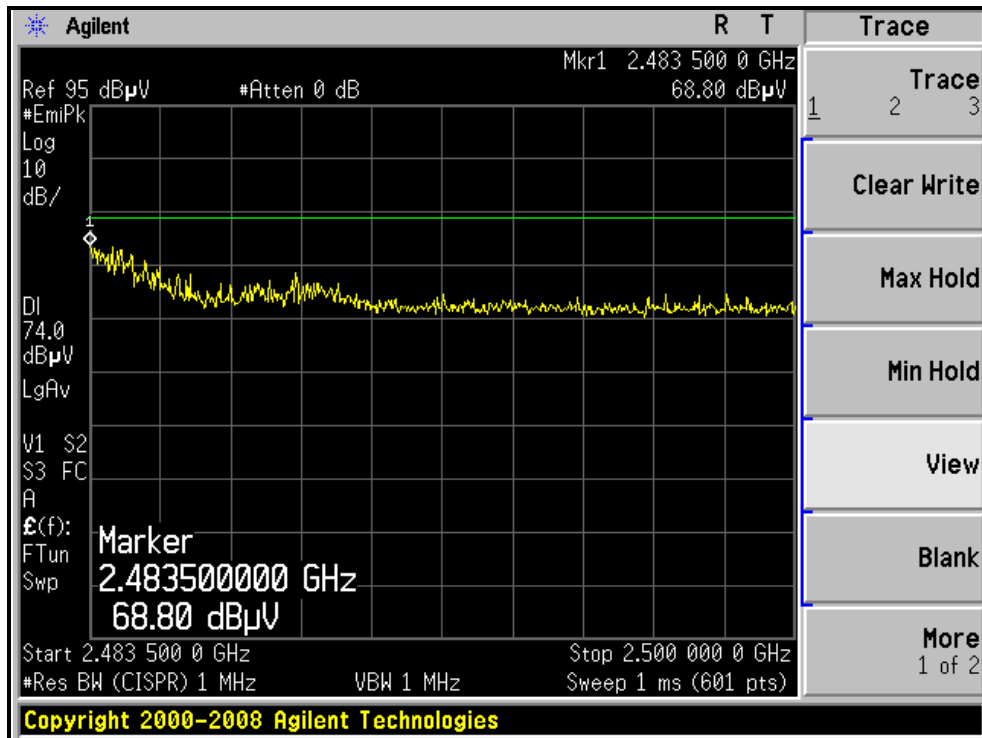



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.17 H	6	26.94	31.66
2	2390.00	44.5 AV	54.0	-9.5	1.17 H	6	12.84	31.66
3	*2412.00	98.8 PK			1.18 H	31	67.07	31.73
4	*2412.00	89.3 AV			1.18 H	31	57.57	31.73
5	4824.00	45.8 PK	74.0	-28.2	1.22 H	338	6.83	38.97
6	4824.00	33.3 AV	54.0	-20.7	1.22 H	338	-5.67	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.01 V	53	37.44	31.66
2	2390.00	51.8 AV	54.0	-2.2	1.01 V	53	20.14	31.66
3	*2412.00	111.6 PK			1.36 V	266	79.87	31.73
4	*2412.00	101.8 AV			1.36 V	266	70.07	31.73
5	4824.00	45.0 PK	74.0	-29.0	1.27 V	197	6.03	38.97
6	4824.00	33.0 AV	54.0	-21.0	1.27 V	197	-5.97	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.8 PK			1.18 H	31	70.99	31.81
2	*2437.00	93.2 AV			1.18 H	31	61.39	31.81
3	4874.00	46.0 PK	74.0	-28.0	1.28 H	337	6.86	39.14
4	4874.00	33.3 AV	54.0	-20.7	1.28 H	337	-5.84	39.14
5	7311.00	50.8 PK	74.0	-23.2	1.06 H	250	4.17	46.63
6	7311.00	42.4 AV	54.0	-11.6	1.06 H	250	-4.23	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.6 PK			1.37 V	91	85.79	31.81
2	*2437.00	107.4 AV			1.37 V	91	75.59	31.81
3	4874.00	50.1 PK	74.0	-23.9	1.07 V	315	10.96	39.14
4	4874.00	37.7 AV	54.0	-16.3	1.07 V	315	-1.44	39.14
5	7311.00	49.1 PK	74.0	-24.9	1.00 V	133	2.47	46.63
6	7311.00	37.2 AV	54.0	-16.8	1.00 V	133	-9.43	46.63

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.9 PK			1.18 H	34	67.01	31.89
2	*2462.00	89.5 AV			1.18 H	34	57.61	31.89
3	2483.50	56.8 PK	74.0	-17.2	1.16 H	9	24.83	31.97
4	2483.50	44.3 AV	54.0	-9.7	1.16 H	9	12.33	31.97
5	4924.00	46.5 PK	74.0	-27.5	1.30 H	340	7.19	39.31
6	4924.00	33.7 AV	54.0	-20.3	1.30 H	340	-5.61	39.31
7	7386.00	51.0 PK	74.0	-23.0	1.09 H	257	4.40	46.60
8	7386.00	42.4 AV	54.0	-11.6	1.09 H	257	-4.20	46.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.6 PK			1.35 V	291	79.71	31.89
2	*2462.00	102.5 AV			1.35 V	291	70.61	31.89
3	2483.50	68.5 PK	74.0	-5.5	1.73 V	200	36.53	31.97
4	2483.50	53.2 AV	54.0	-0.8	1.73 V	200	21.23	31.97
5	4924.00	46.2 PK	74.0	-27.8	1.31 V	133	6.89	39.31
6	4924.00	35.3 AV	54.0	-18.7	1.31 V	133	-4.01	39.31
7	7386.00	49.6 PK	74.0	-24.4	1.30 V	189	3.00	46.60
8	7386.00	37.4 AV	54.0	-16.6	1.30 V	189	-9.20	46.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, HORIZONTAL)

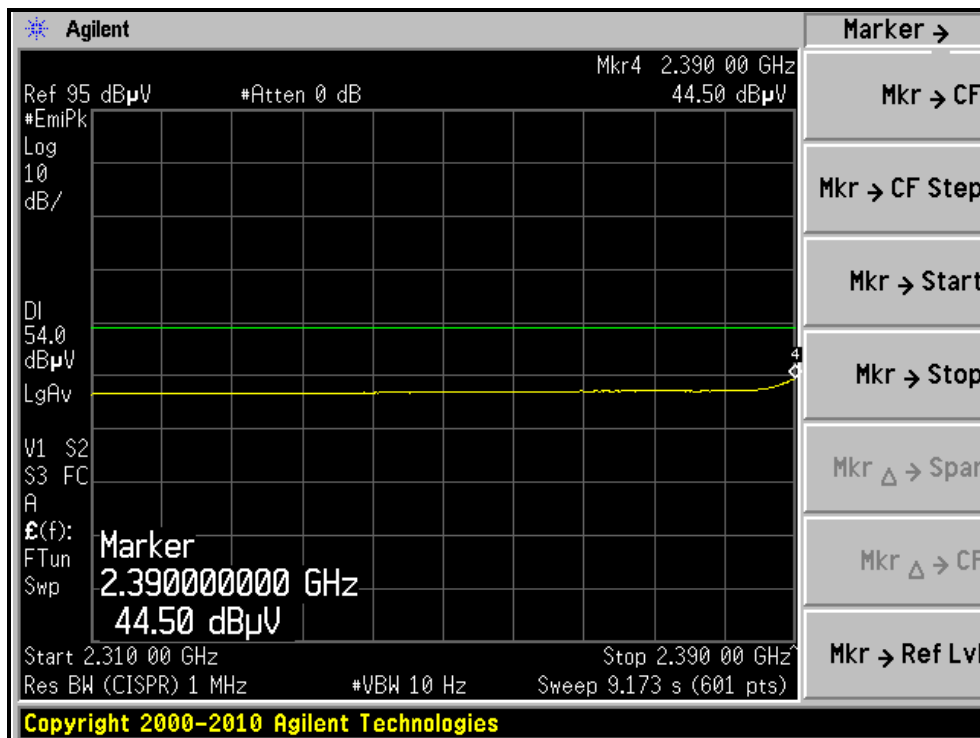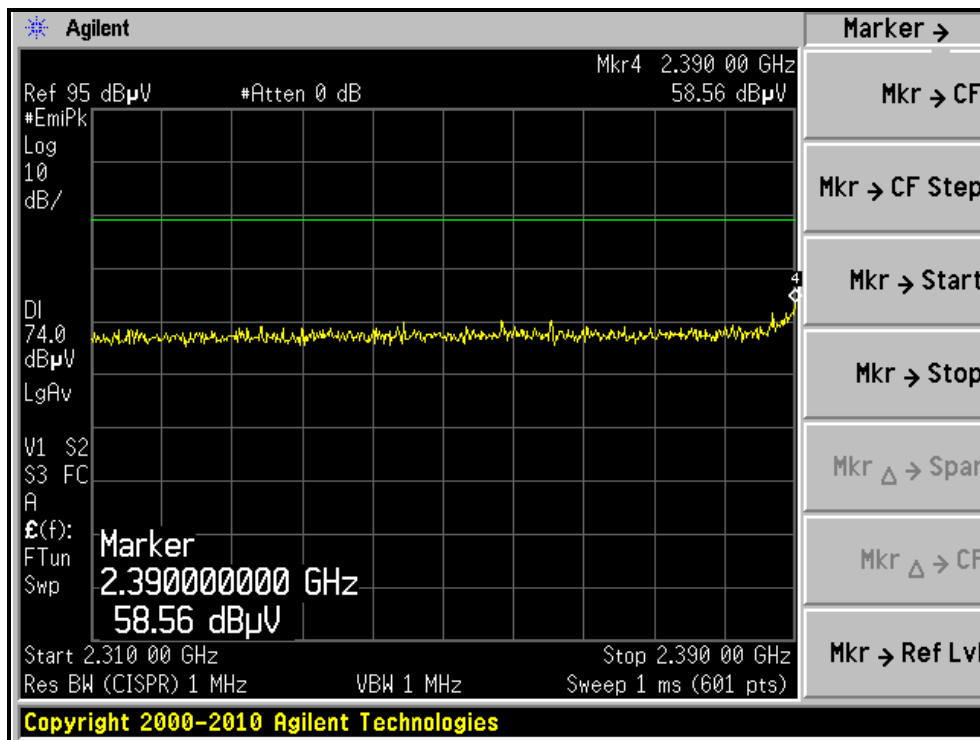



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, VERTICAL)

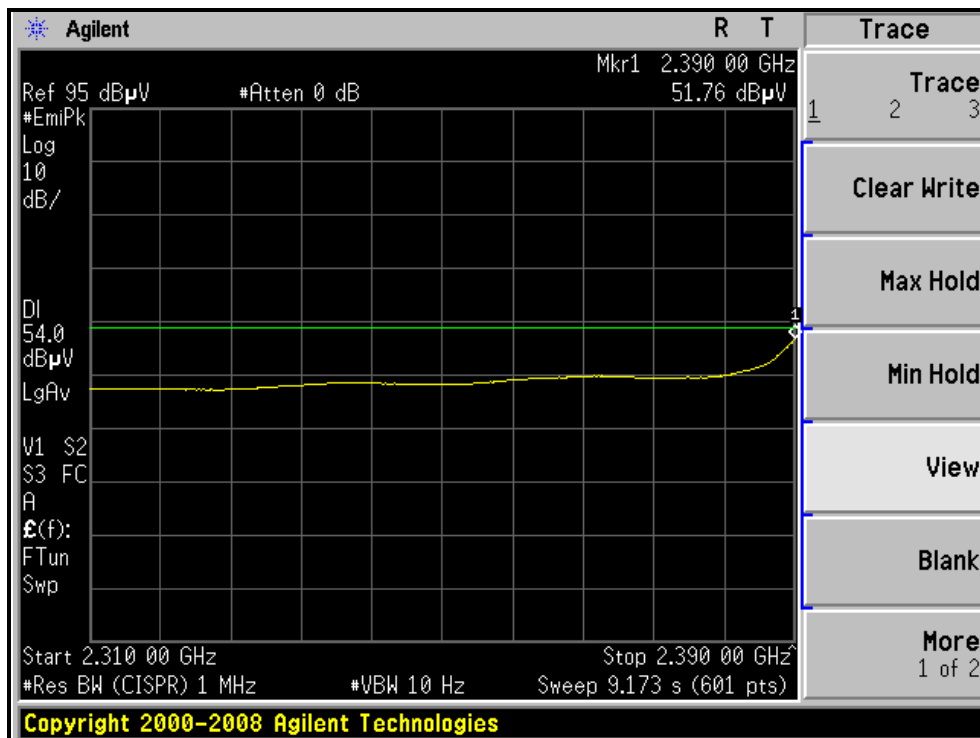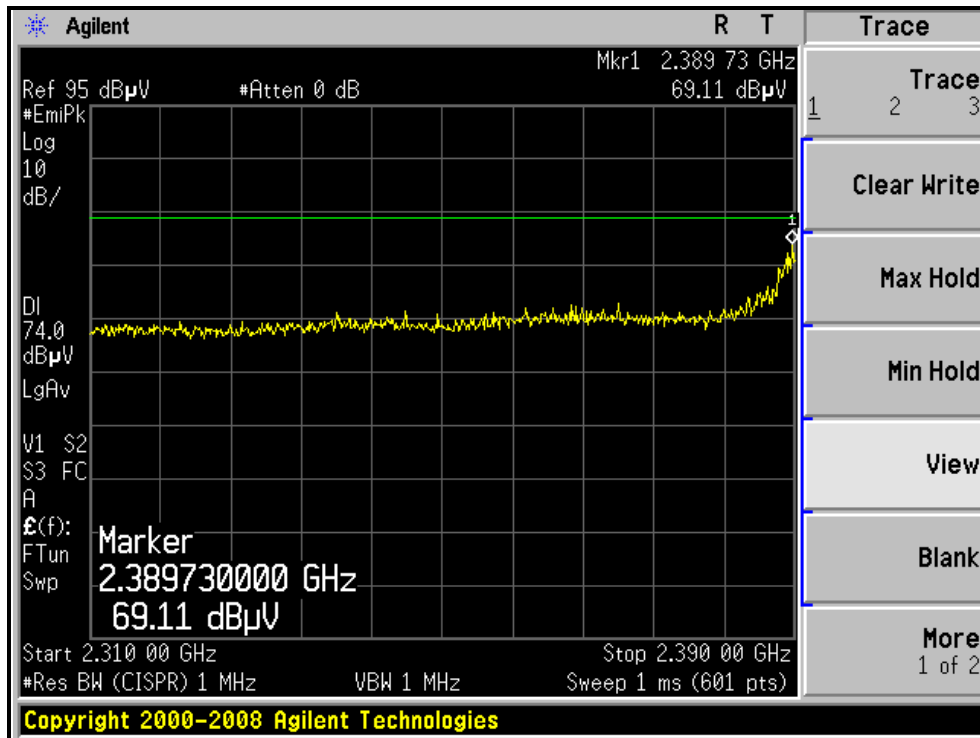



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, HORIZONTAL)

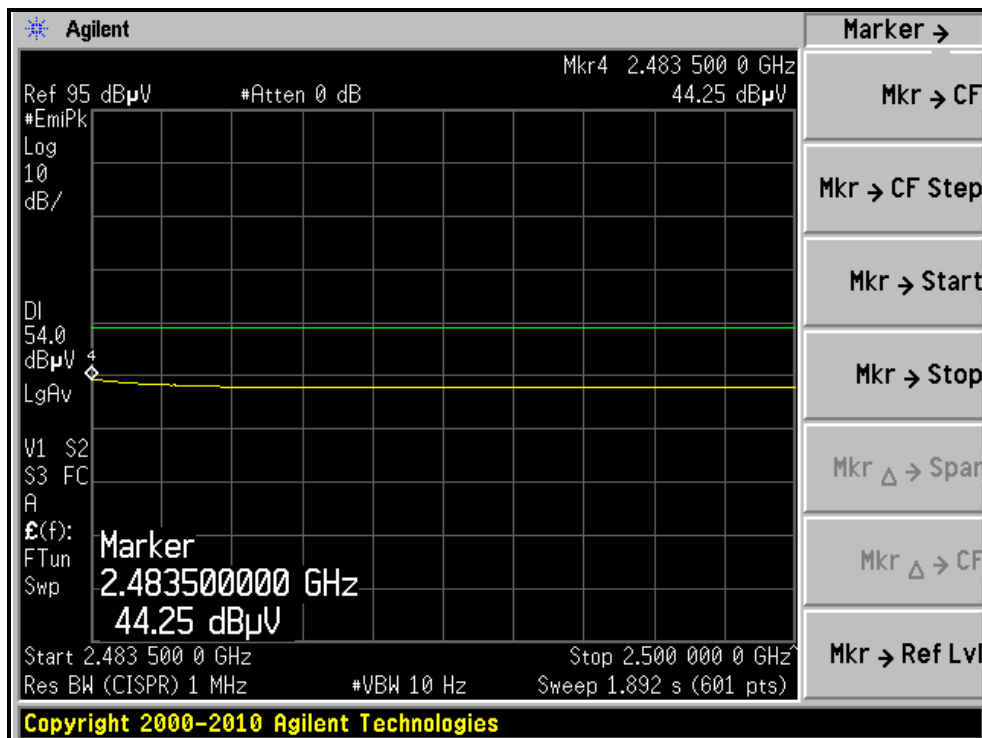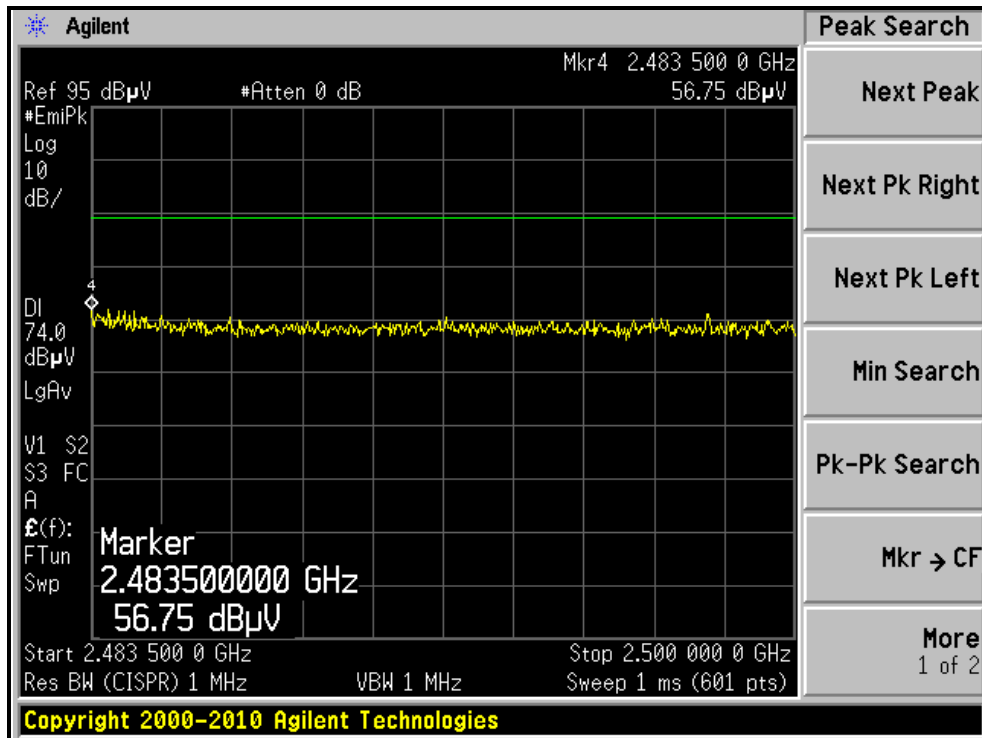



A D T

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, VERTICAL)

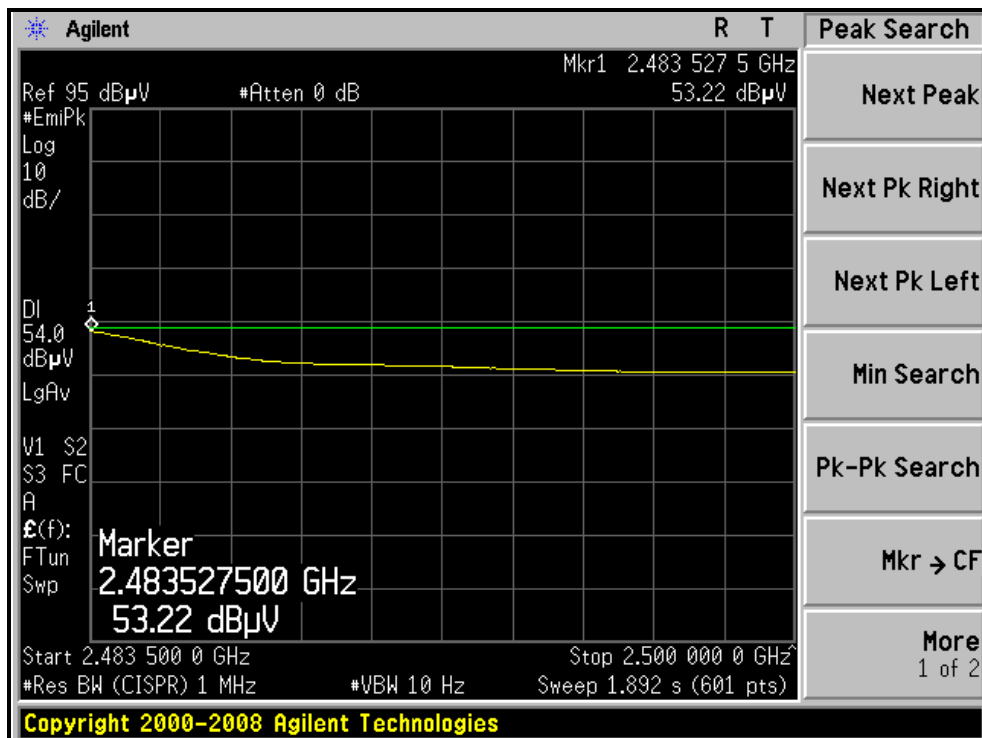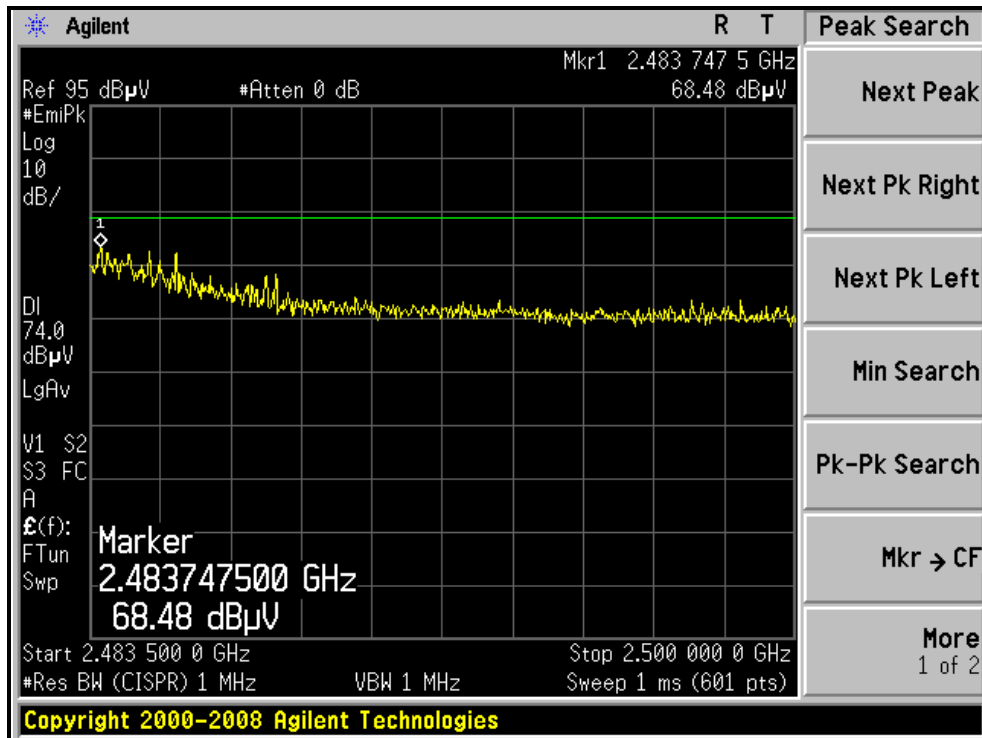



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.17 H	7	26.94	31.66
2	2390.00	43.9 AV	54.0	-10.1	1.17 H	7	12.24	31.66
3	*2422.00	91.7 PK			1.19 H	11	59.94	31.76
4	*2422.00	81.3 AV			1.19 H	11	49.54	31.76
5	4844.00	46.7 PK	74.0	-27.3	1.26 H	341	7.66	39.04
6	4844.00	33.7 AV	54.0	-20.3	1.26 H	341	-5.34	39.04
7	7266.00	50.7 PK	74.0	-23.3	1.13 H	259	4.03	46.67
8	7266.00	42.2 AV	54.0	-11.8	1.13 H	259	-4.47	46.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.07 V	17	38.04	31.66
2	2390.00	53.4 AV	54.0	-0.6	1.07 V	17	21.74	31.66
3	*2422.00	106.0 PK			1.35 V	92	74.24	31.76
4	*2422.00	96.4 AV			1.35 V	92	64.64	31.76
5	4844.00	44.9 PK	74.0	-29.1	1.46 V	329	5.86	39.04
6	4844.00	30.7 AV	54.0	-23.3	1.46 V	329	-8.34	39.04
7	7266.00	48.6 PK	74.0	-25.4	1.00 V	309	1.93	46.67
8	7266.00	36.9 AV	54.0	-17.1	1.00 V	309	-9.77	46.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	96.1 PK			1.24 H	3	64.29	31.81
2	*2437.00	85.5 AV			1.24 H	3	53.69	31.81
3	4874.00	47.1 PK	74.0	-26.9	1.27 H	347	7.96	39.14
4	4874.00	34.0 AV	54.0	-20.0	1.27 H	347	-5.14	39.14
5	7311.00	50.6 PK	74.0	-23.4	1.09 H	255	3.97	46.63
6	7311.00	42.3 AV	54.0	-11.7	1.09 H	255	-4.33	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.7 PK			1.00 V	61	79.89	31.81
2	*2437.00	101.3 AV			1.00 V	61	69.49	31.81
3	4874.00	44.2 PK	74.0	-29.8	1.28 V	12	5.06	39.14
4	4874.00	32.3 AV	54.0	-21.7	1.28 V	12	-6.84	39.14
5	7311.00	48.8 PK	74.0	-25.2	1.27 V	15	2.17	46.63
6	7311.00	37.1 AV	54.0	-16.9	1.27 V	15	-9.53	46.63

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	90.5 PK			1.19 H	11	58.64	31.86
2	*2452.00	80.2 AV			1.19 H	11	48.34	31.86
3	2483.50	56.3 PK	74.0	-17.7	1.15 H	9	24.33	31.97
4	2483.50	43.5 AV	54.0	-10.5	1.15 H	9	11.53	31.97
5	4904.00	47.1 PK	74.0	-26.9	1.29 H	334	7.86	39.24
6	4904.00	34.2 AV	54.0	-19.8	1.29 H	334	-5.04	39.24
7	7356.00	50.5 PK	74.0	-23.5	1.13 H	262	3.89	46.61
8	7356.00	42.0 AV	54.0	-12.0	1.13 H	262	-4.61	46.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.2 PK			1.03 V	64	76.34	31.86
2	*2452.00	99.8 AV			1.03 V	64	67.94	31.86
3	2483.50	68.6 PK	74.0	-5.4	1.55 V	309	36.63	31.97
4	2483.50	52.0 AV	54.0	-2.0	1.55 V	309	20.03	31.97
5	4904.00	43.6 PK	74.0	-30.4	1.43 V	360	4.36	39.24
6	4904.00	30.8 AV	54.0	-23.2	1.43 V	360	-8.44	39.24
7	7356.00	49.6 PK	74.0	-24.4	1.02 V	256	2.99	46.61
8	7356.00	36.9 AV	54.0	-17.1	1.02 V	256	-9.71	46.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, HORIZONTAL)

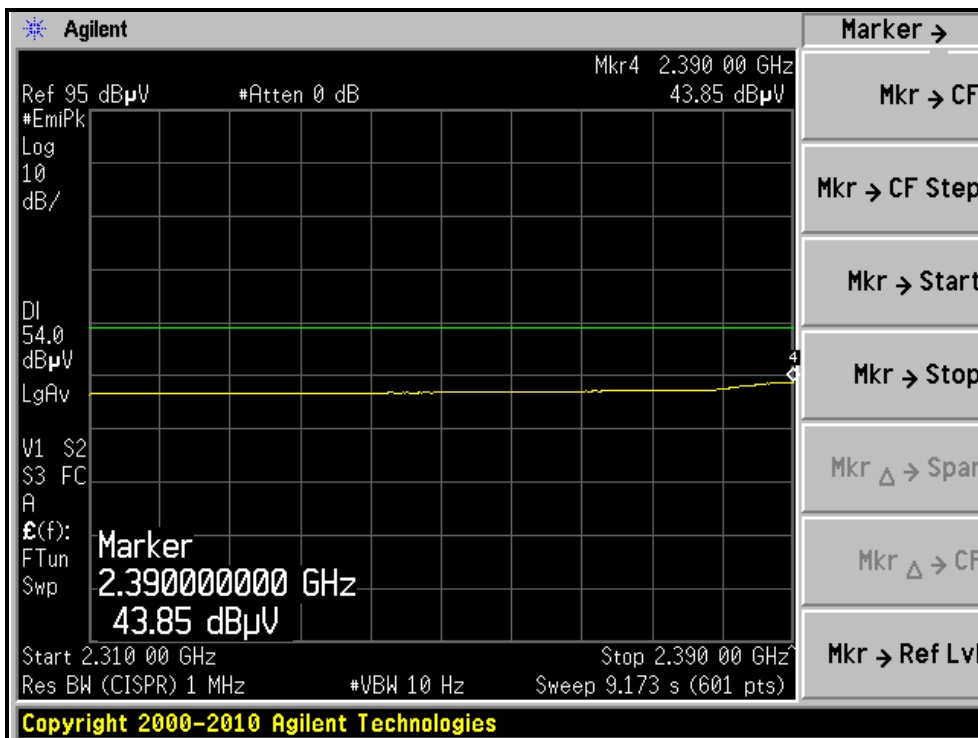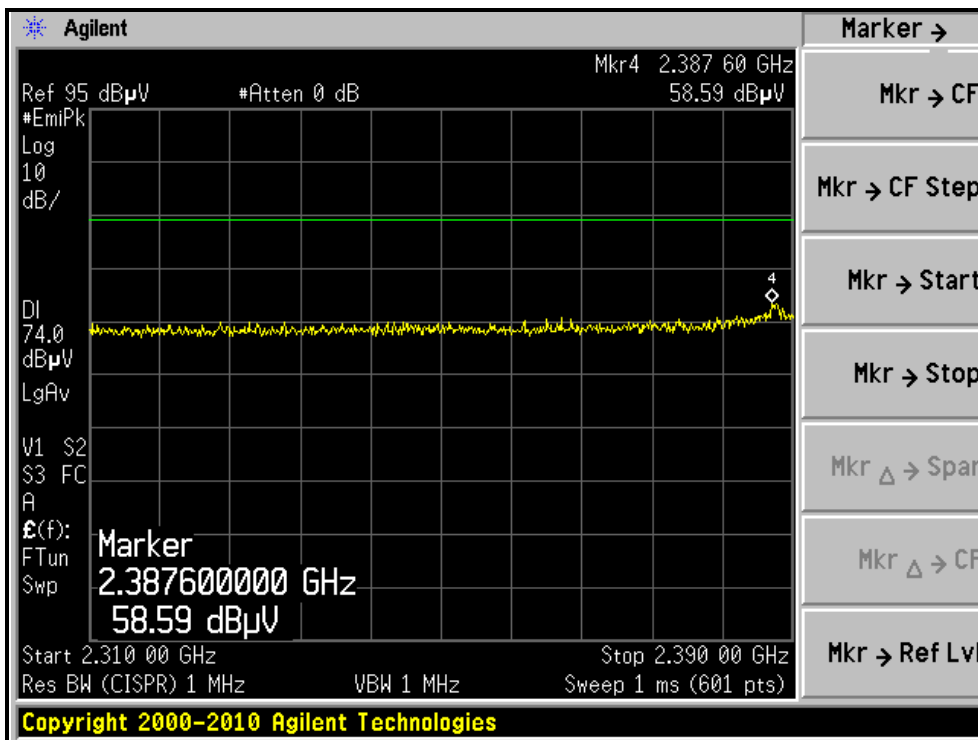



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, VERTICAL)

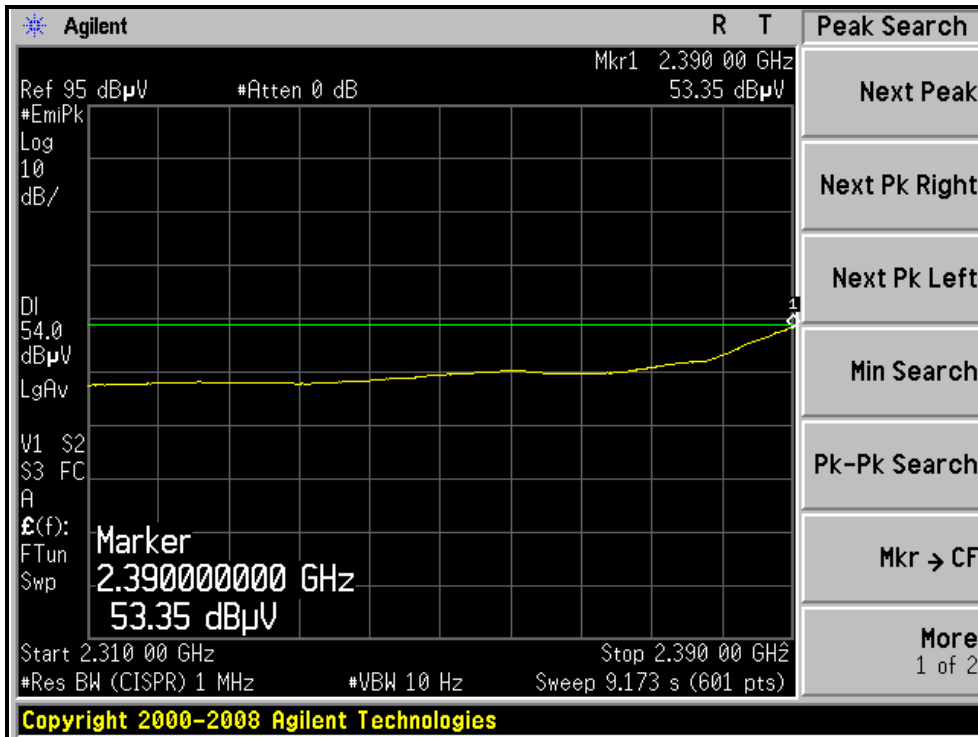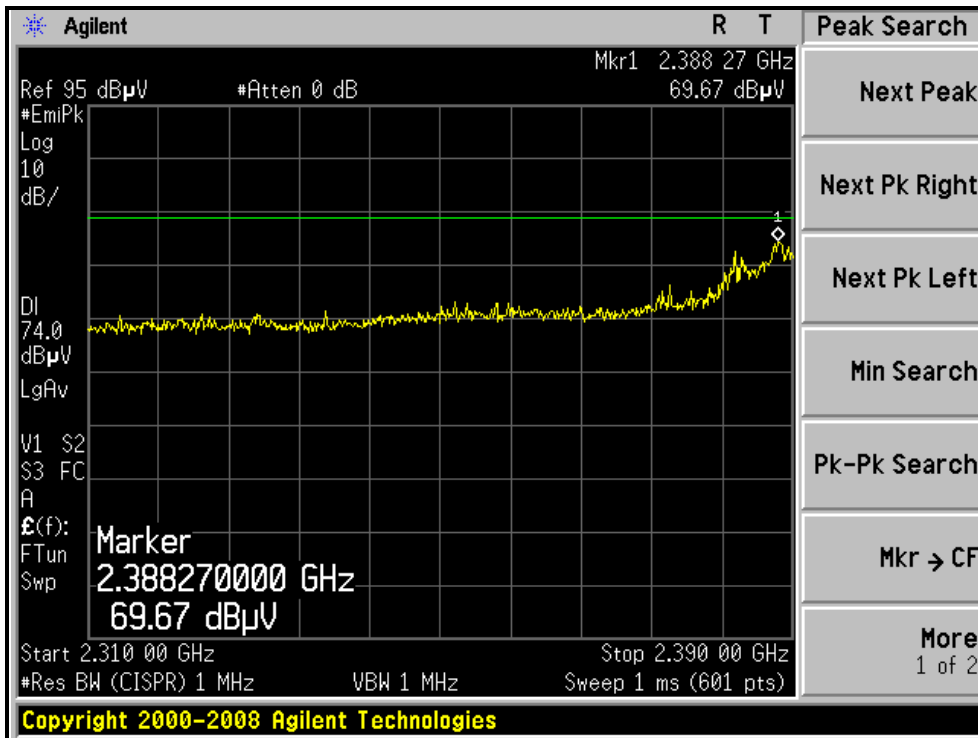



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, HORIZONTAL)

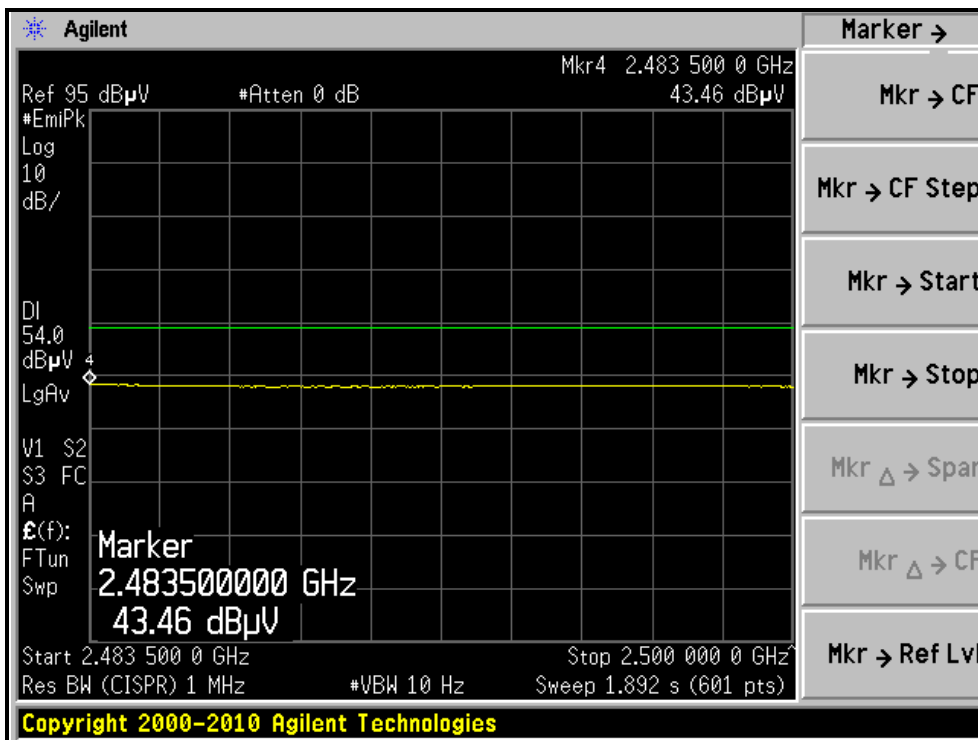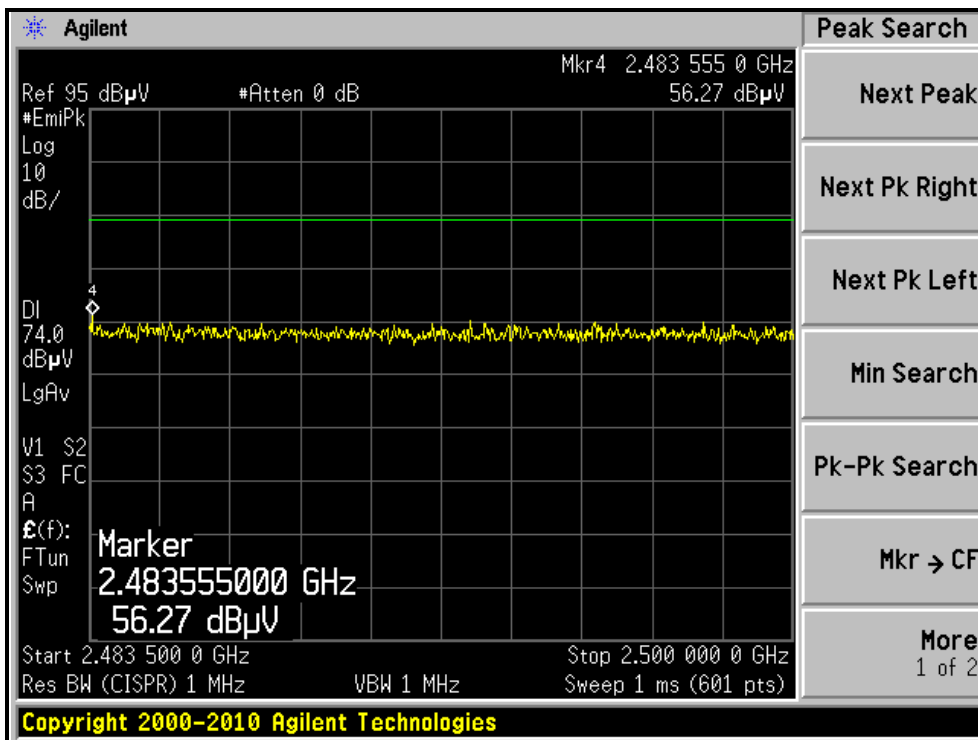



A D T

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, VERTICAL)

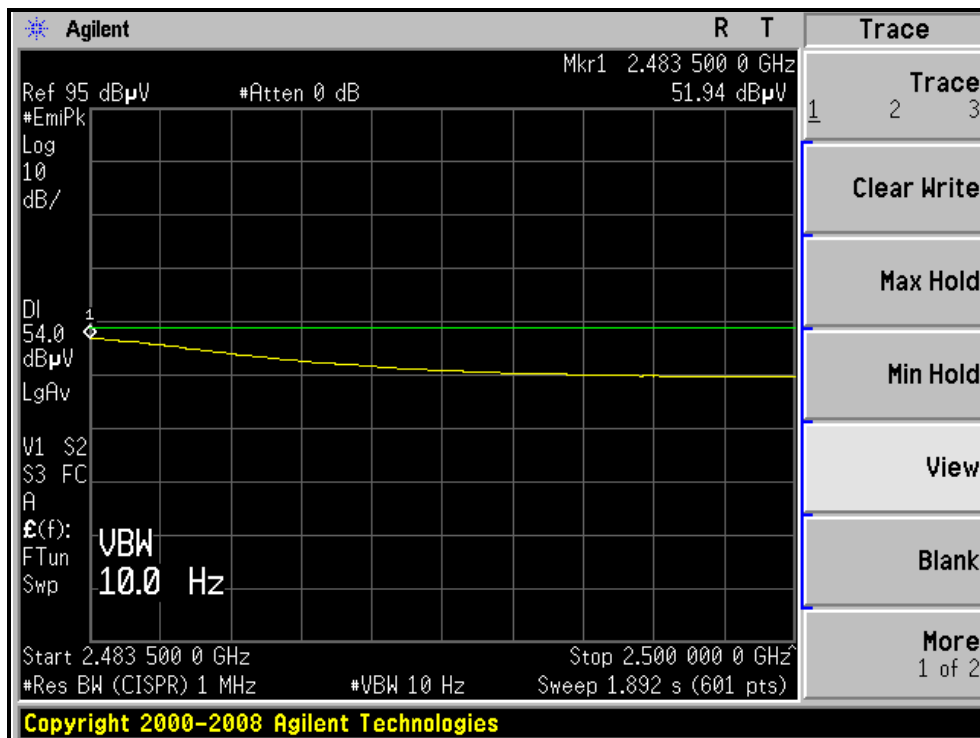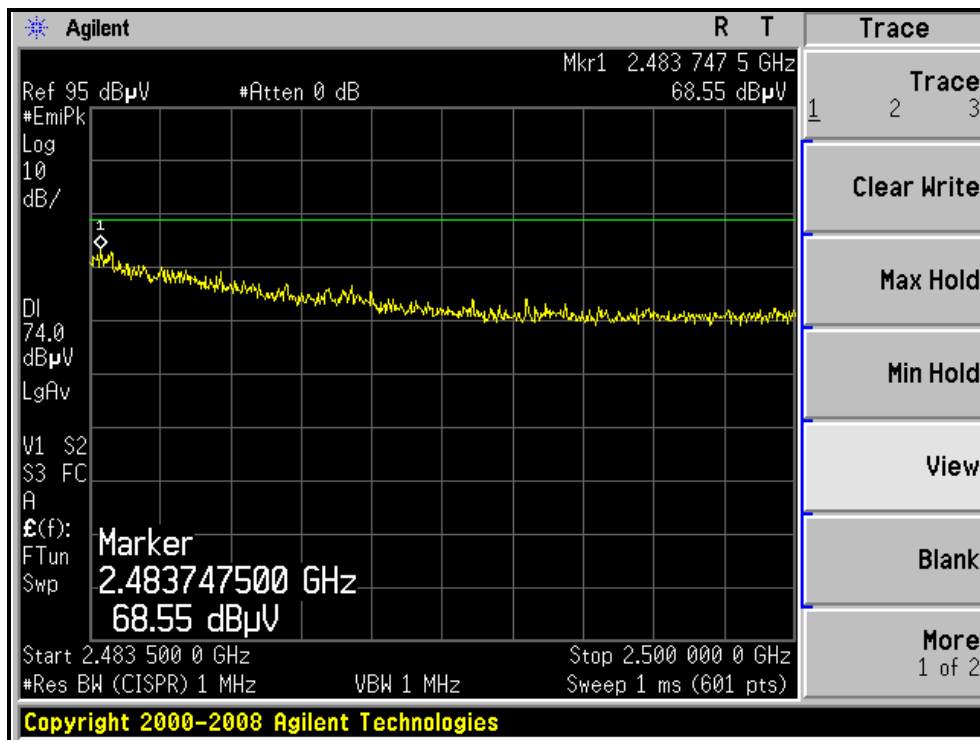

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

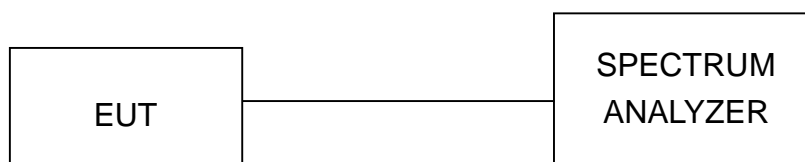

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




A D T

4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	11.44	0.5	PASS
6	2437	12.19	0.5	PASS
11	2462	11.60	0.5	PASS

CH6

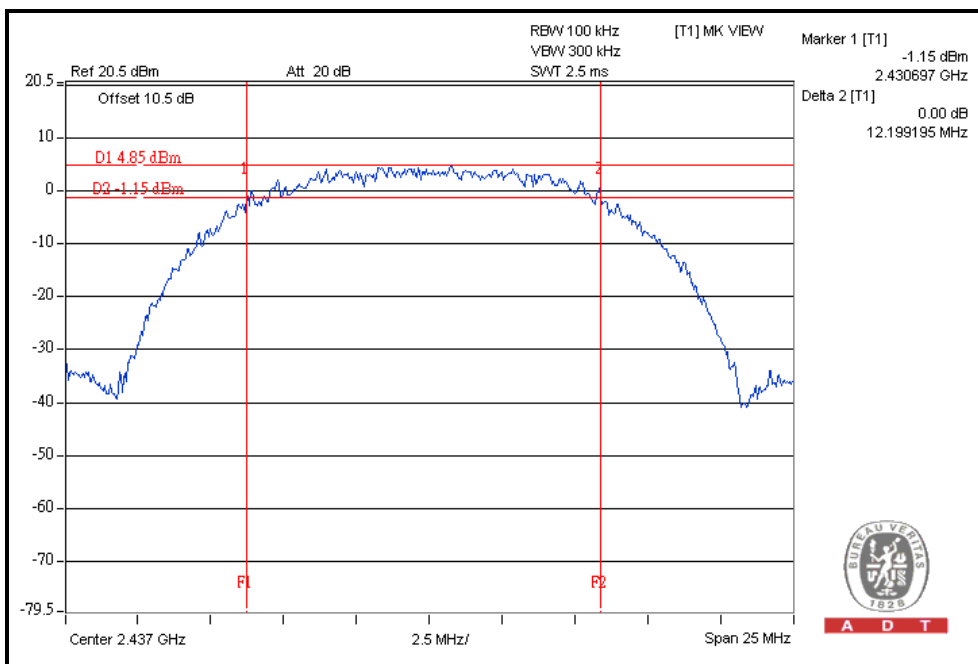




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.36	0.5	PASS
6	2437	16.41	0.5	PASS
11	2462	16.40	0.5	PASS

CH6

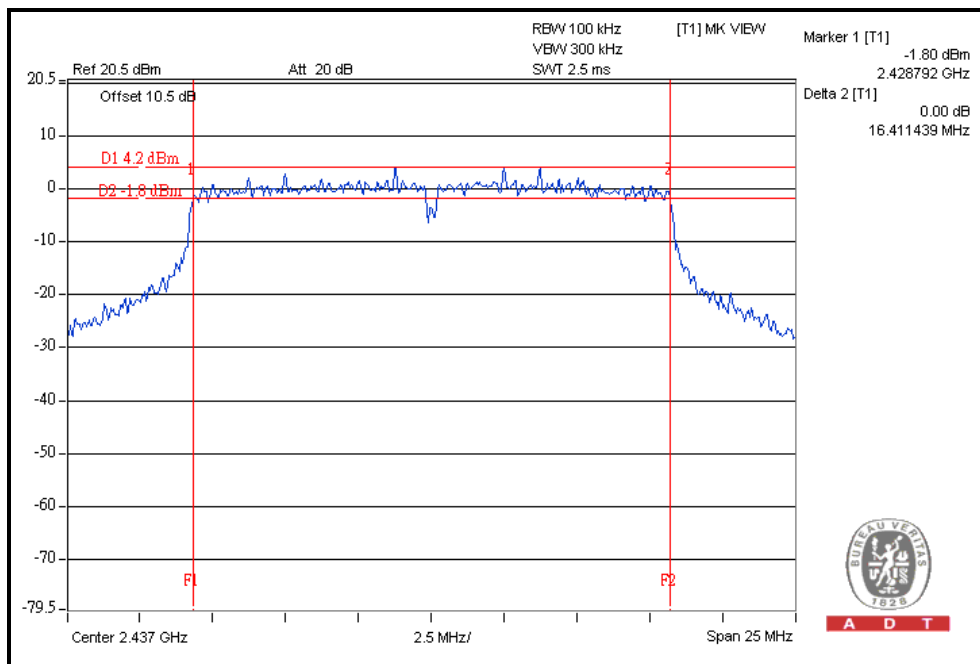




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.59	0.5	PASS
6	2437	17.67	0.5	PASS
11	2462	17.64	0.5	PASS


CH6

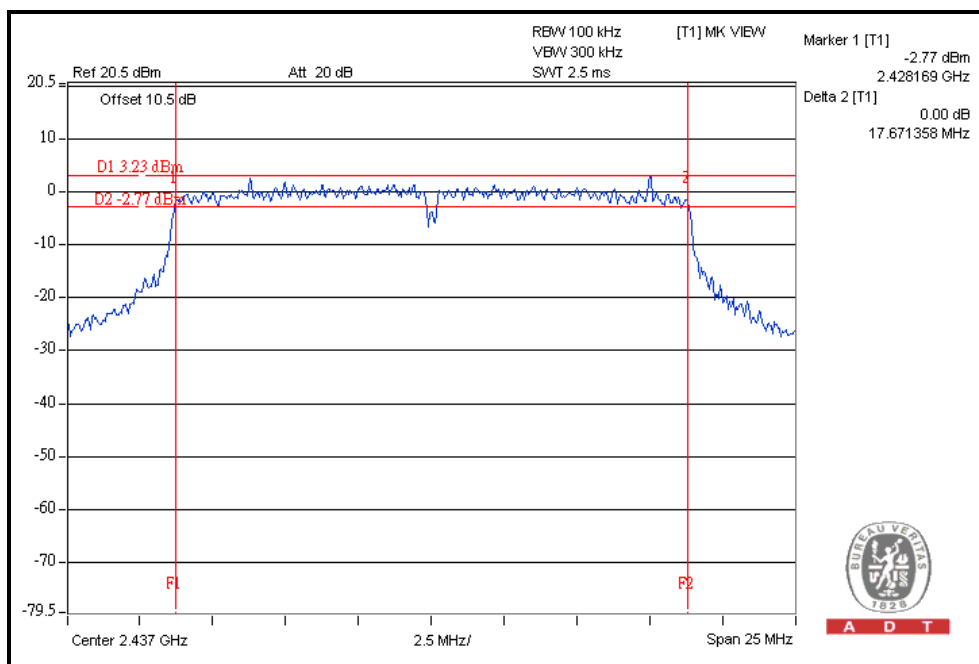

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.50	0.5	PASS
6	2437	36.48	0.5	PASS
9	2452	36.51	0.5	PASS

CH9

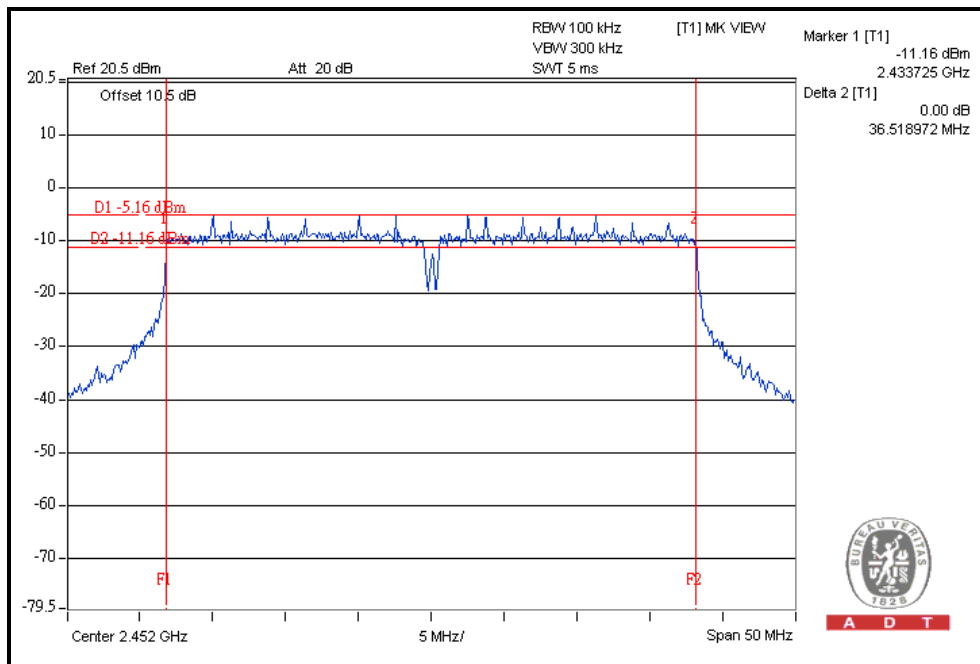

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

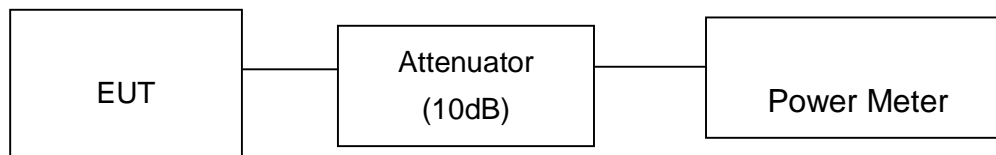

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	18.4	18.1	133.7	21.3	29.5	PASS
6	2437	19.4	18.6	159.5	22.0	29.5	PASS
11	2462	19.8	19.6	186.7	22.7	29.5	PASS

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi)=6.5

The effective legacy gain is 6.5dBi, therefore the limit needs to reduce.

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	22.4	22.1	336.0	25.3	29.5	PASS
6	2437	23.6	23.7	463.5	26.7	29.5	PASS
11	2462	21.9	21.3	289.8	24.6	29.5	PASS

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi)=6.5

The effective legacy gain is 6.5dBi, therefore the limit needs to reduce.



A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	22.0	21.7	306.4	24.9	30	PASS
6	2437	23.9	23.8	485.4	26.9	30	PASS
11	2462	21.4	21.4	276.1	24.4	30	PASS

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
3	2422	19.5	19.0	168.6	22.3	30	PASS
6	2437	22.1	21.5	303.4	24.8	30	PASS
9	2452	19.7	19.2	176.5	22.5	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

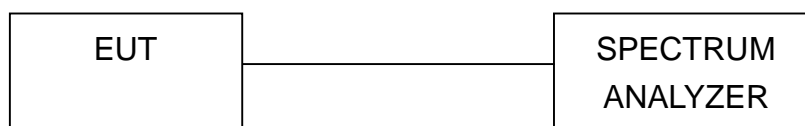

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




A D T

4.5.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
1	2412	-9.3	-4.9	-3.6	8	PASS
6	2437	-5.8	-7.6	-3.6	8	PASS
11	2462	-7.7	-6.8	-4.2	8	PASS

For Chain(1): CH1

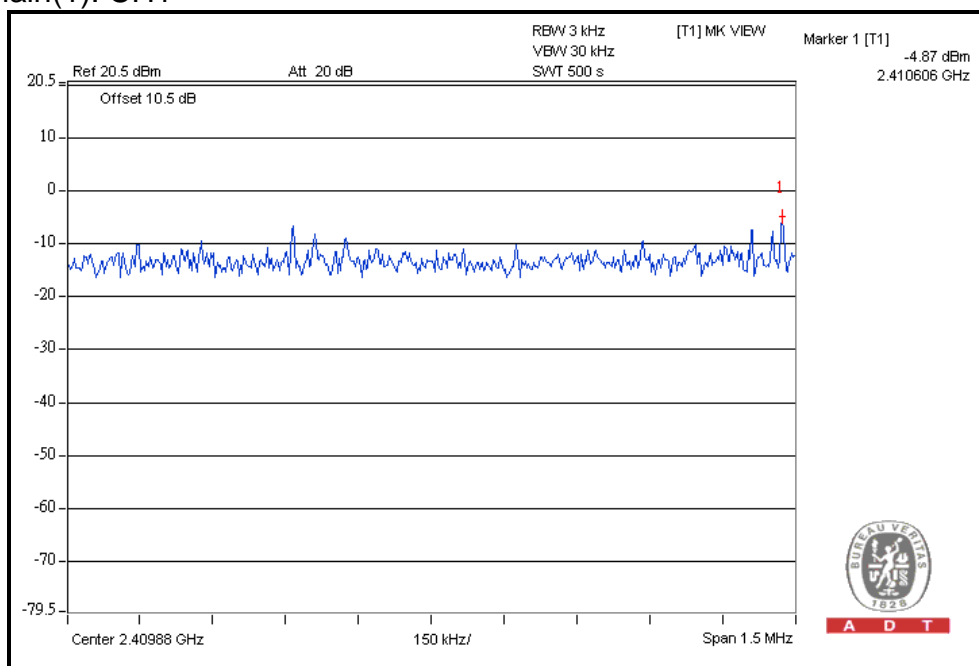




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
1	2412	-12.7	-12.6	-9.6	8	PASS
6	2437	-8.4	-7.9	-5.1	8	PASS
11	2462	-13.4	-13.0	-10.2	8	PASS

For Chain(1): CH6

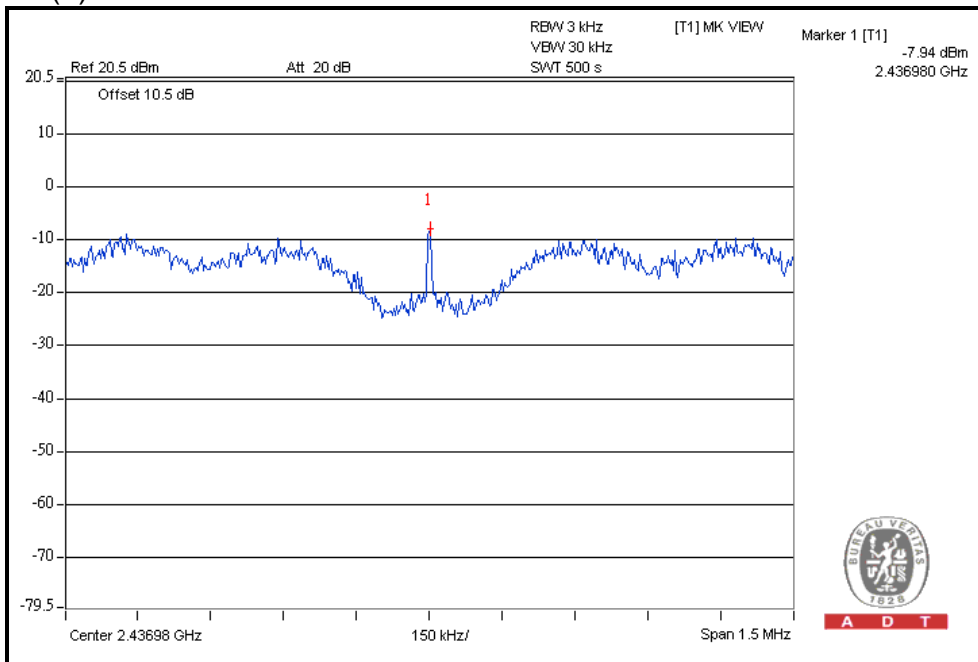




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
1	2412	-13.7	-13.8	-10.7	8	PASS
6	2437	-9.2	-10.0	-6.6	8	PASS
11	2462	-14.4	-14.1	-11.2	8	PASS

For Chain(0): CH6

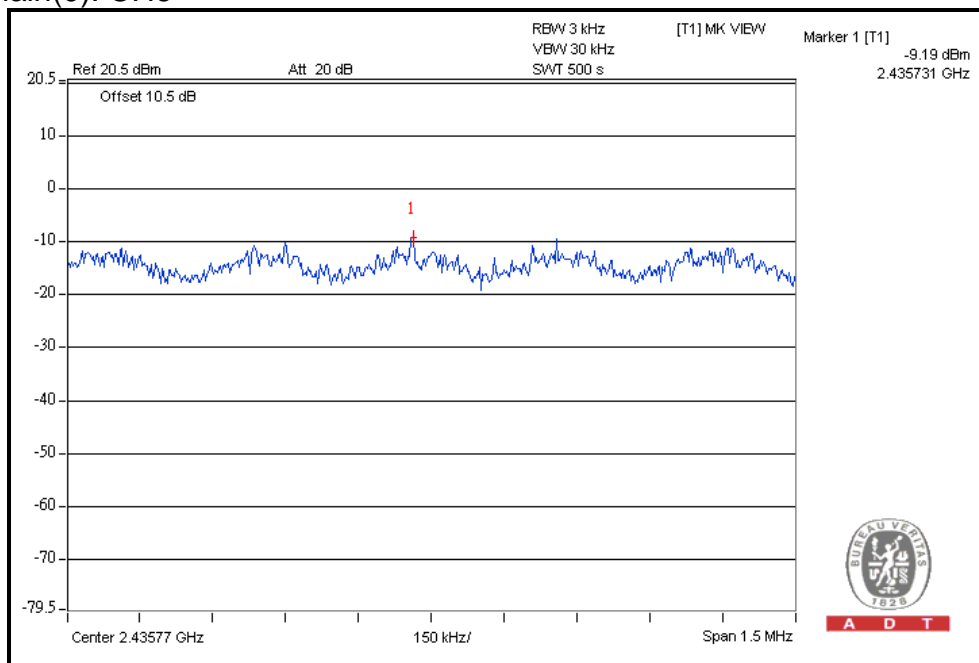




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
3	2422	-20.3	-19.8	-17.0	8	PASS
6	2437	-16.8	-17.2	-14.0	8	PASS
9	2452	-14.8	-15.2	-12.0	8	PASS

For Chain(0): CH9

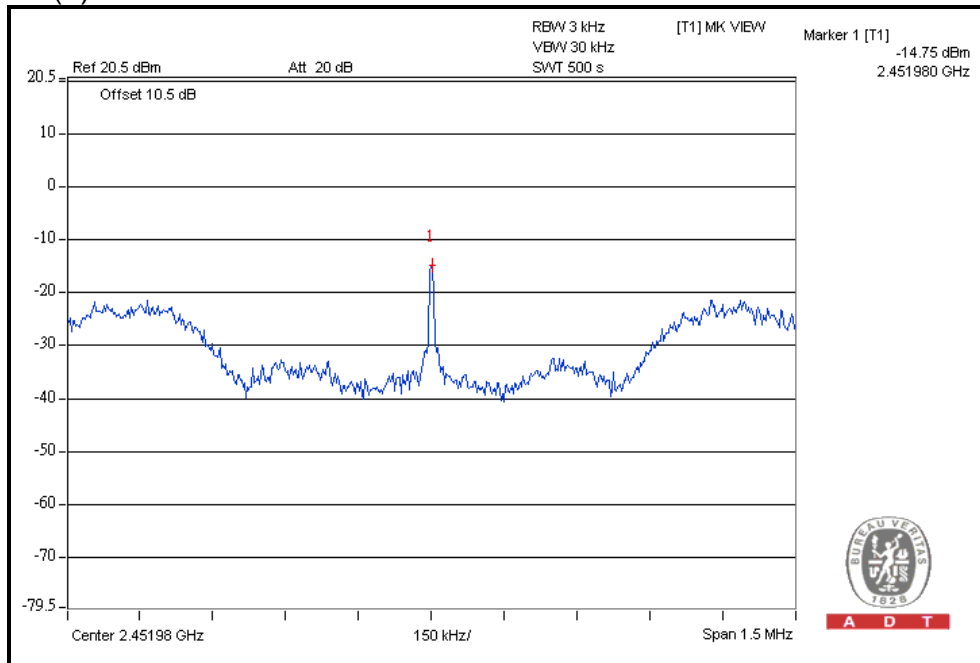

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100MHz or 200MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS



The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



A D T

802.11b DSSS MODULATION:



For Chain(0): CH1

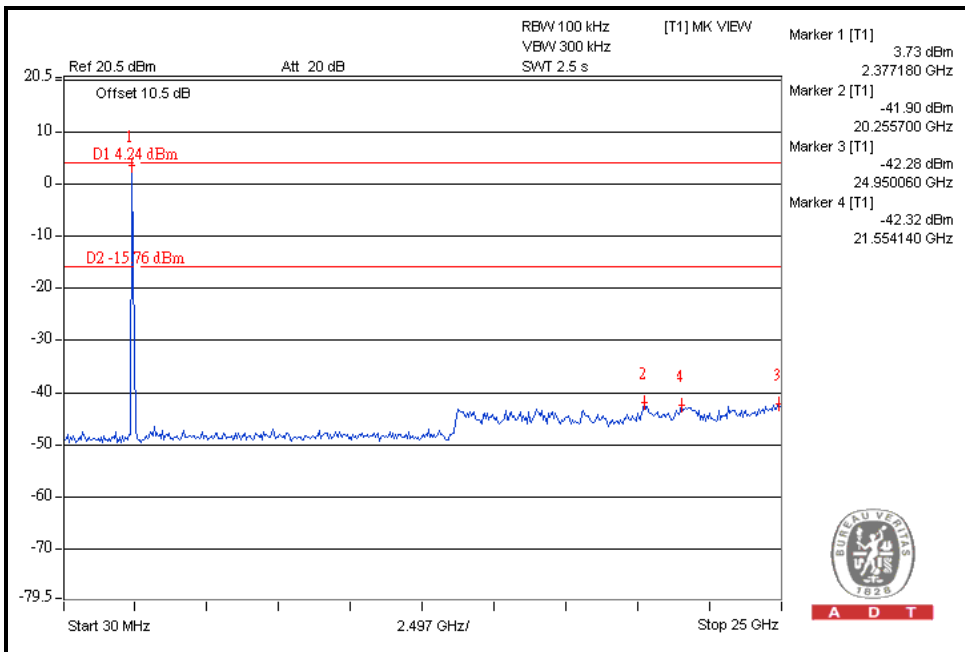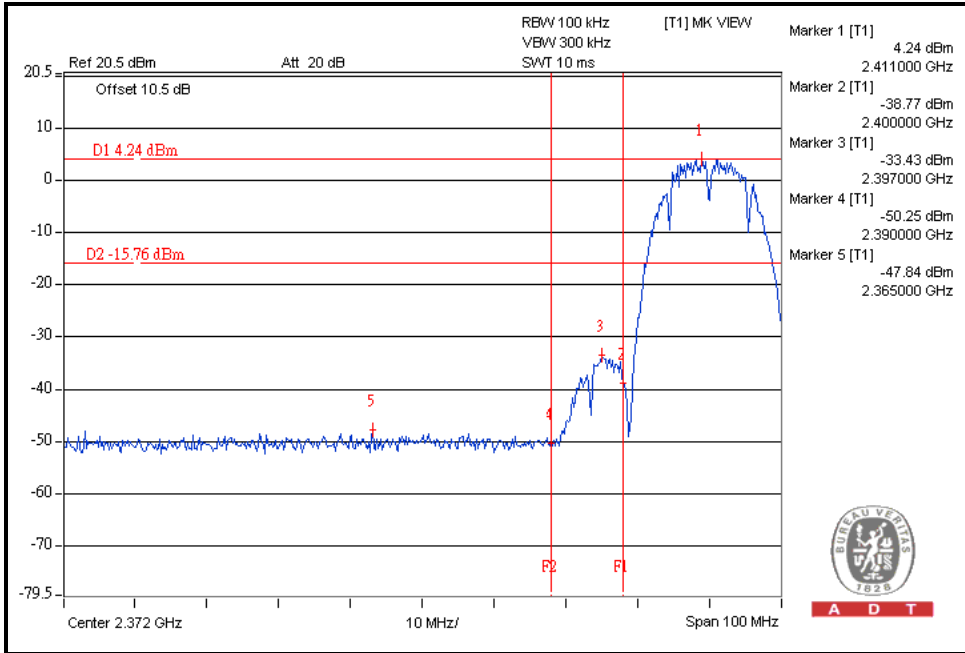



A D T



For Chain(0): CH11

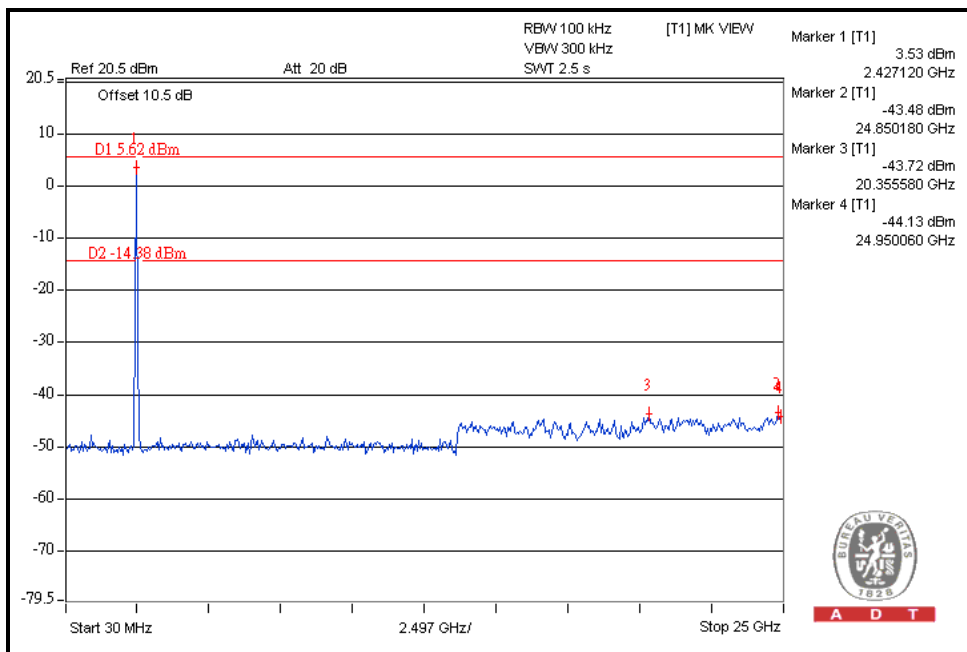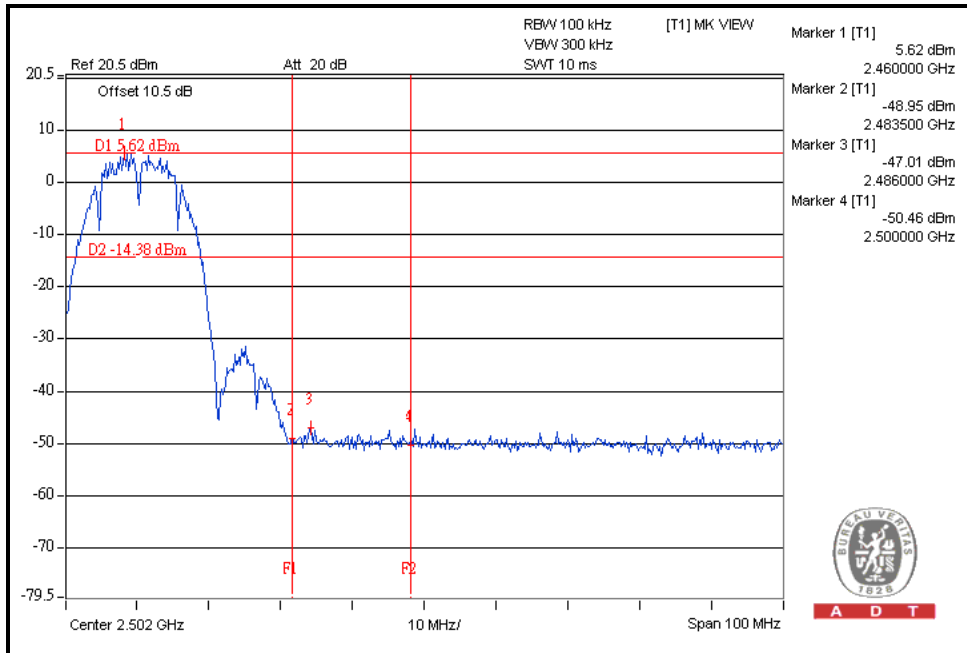



A D T



For Chain(1): CH1

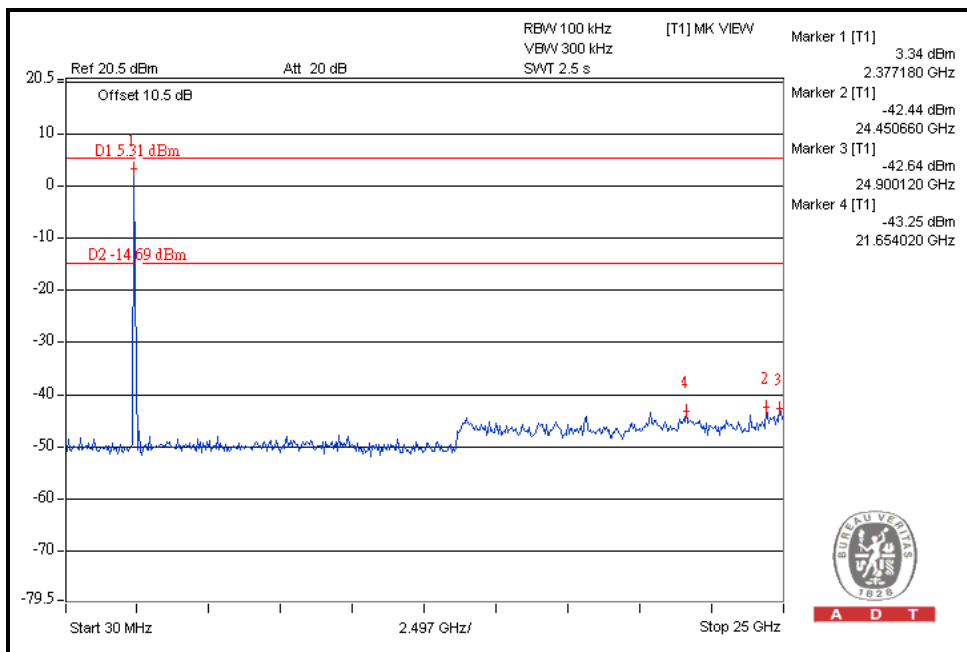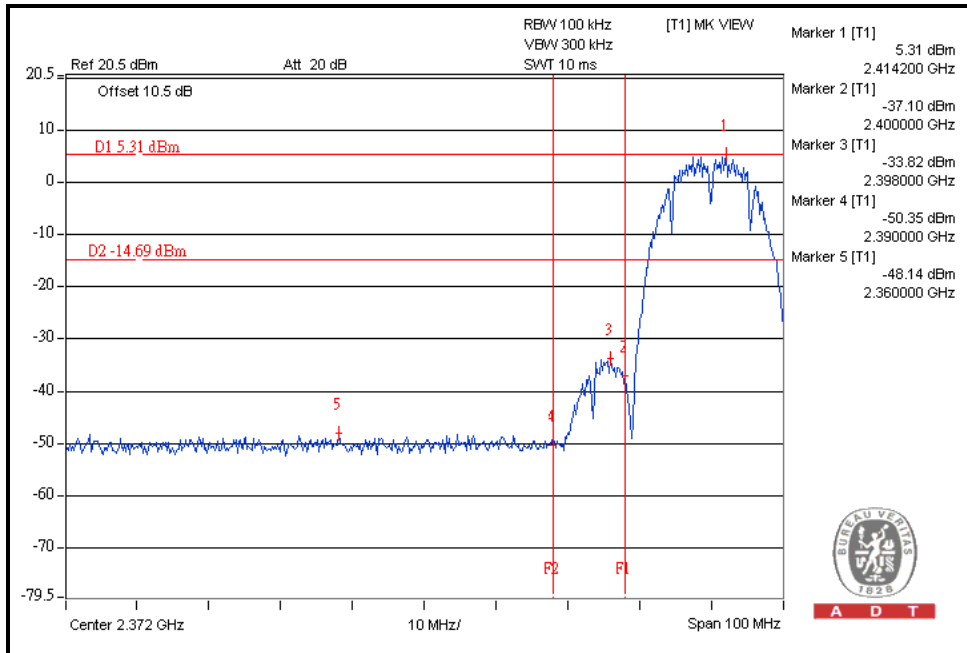





A D T

For Chain(1): CH11

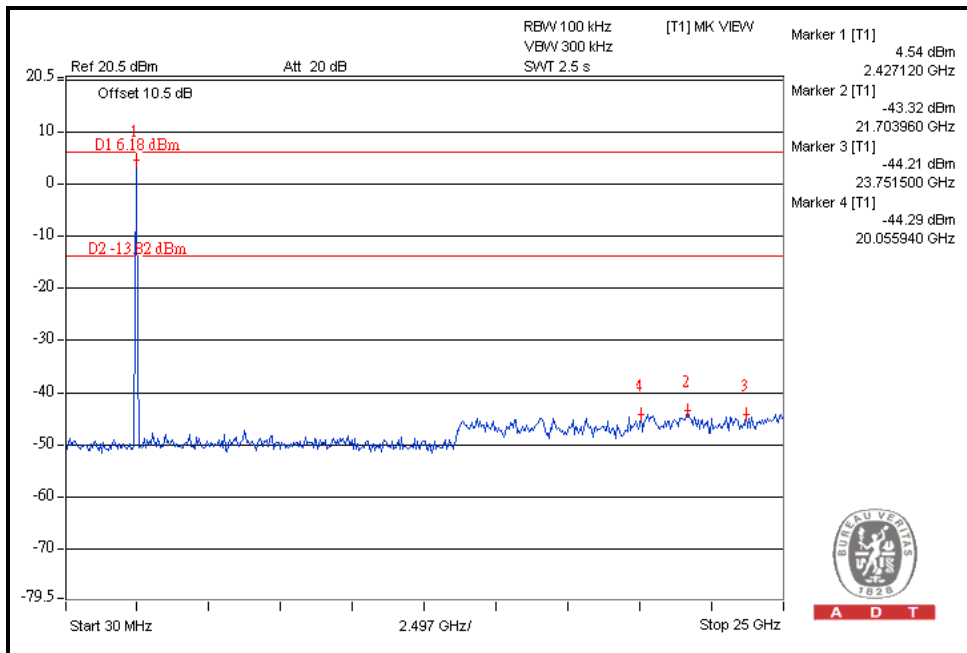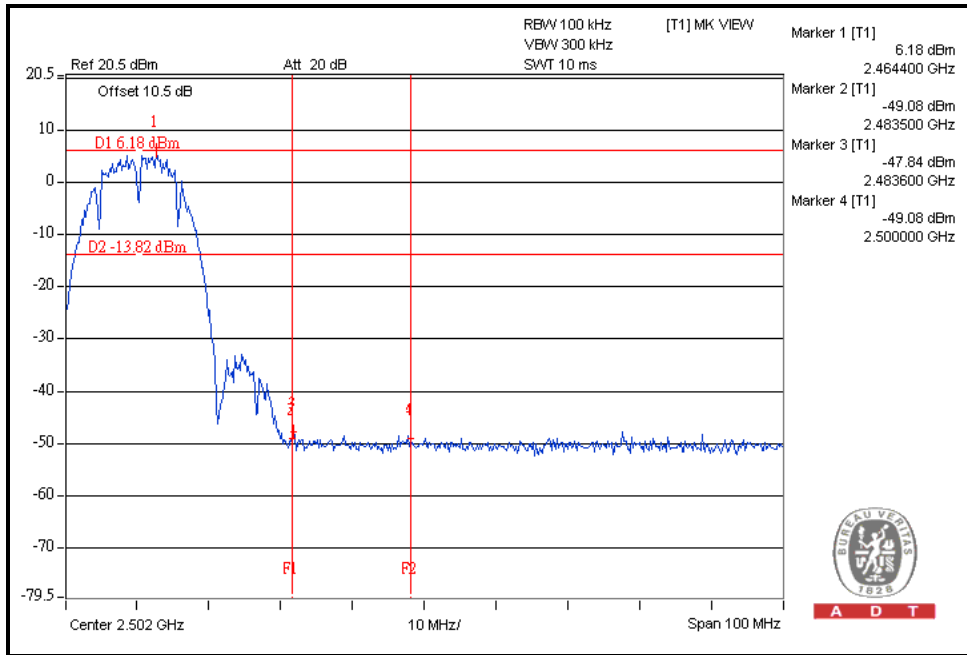

802.11g OFDM MODULATION:



For Chain(0): CH1

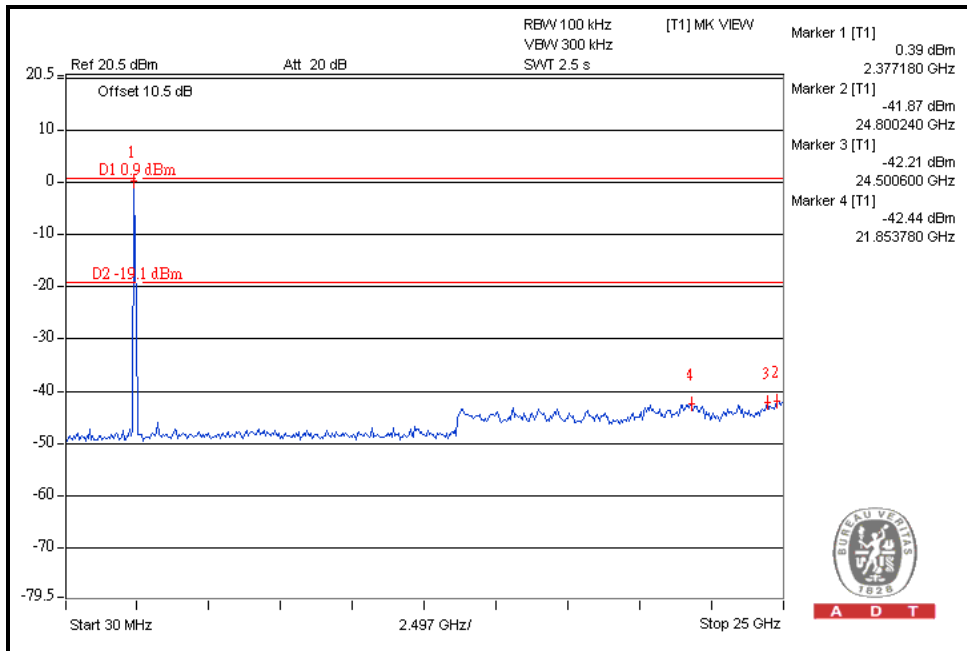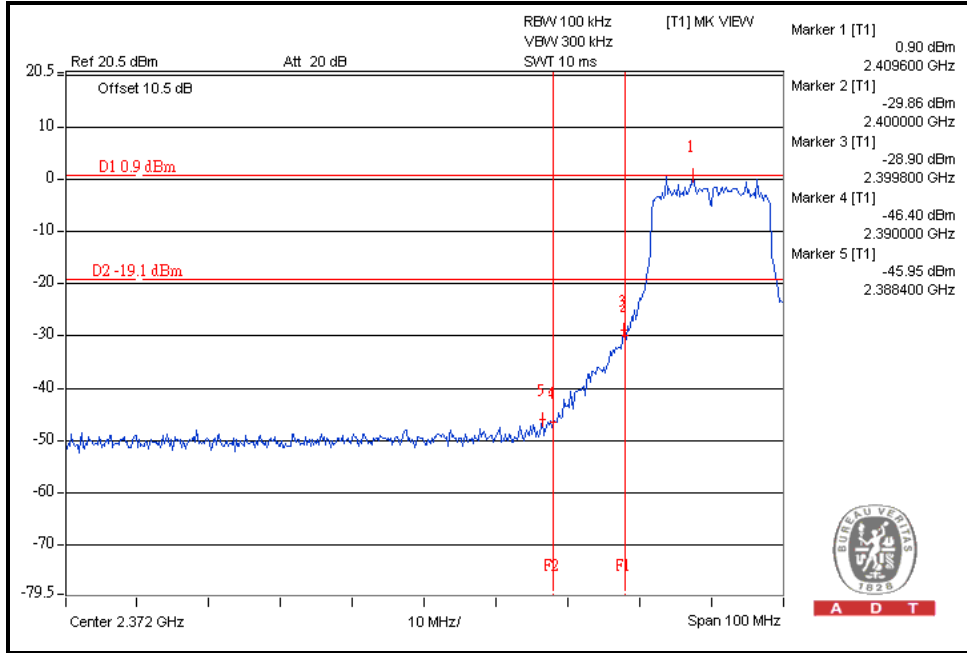



A D T



For Chain(0): CH11

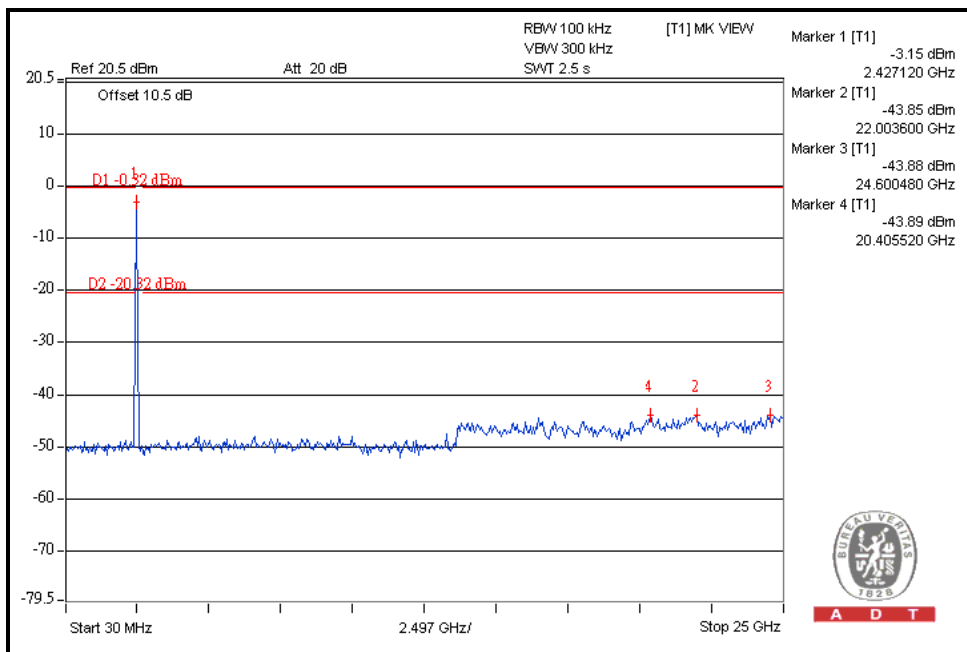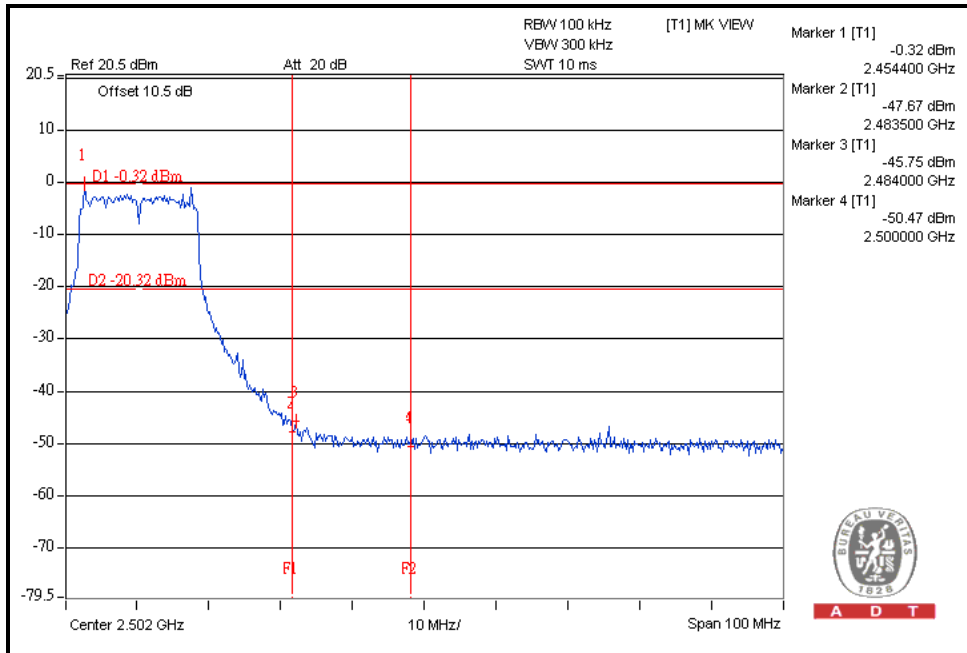



A D T



For Chain(1): CH1

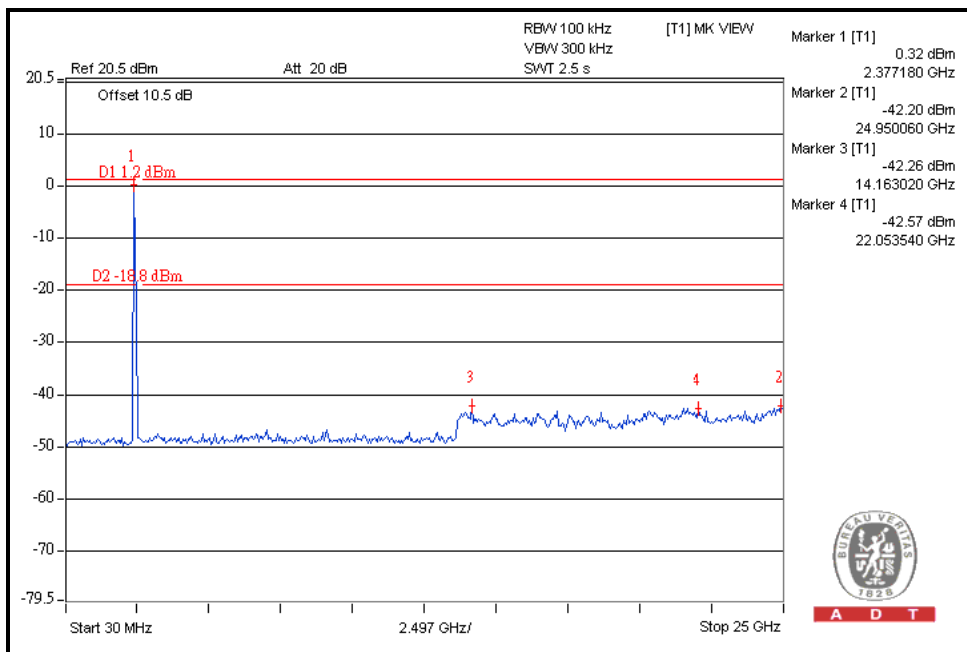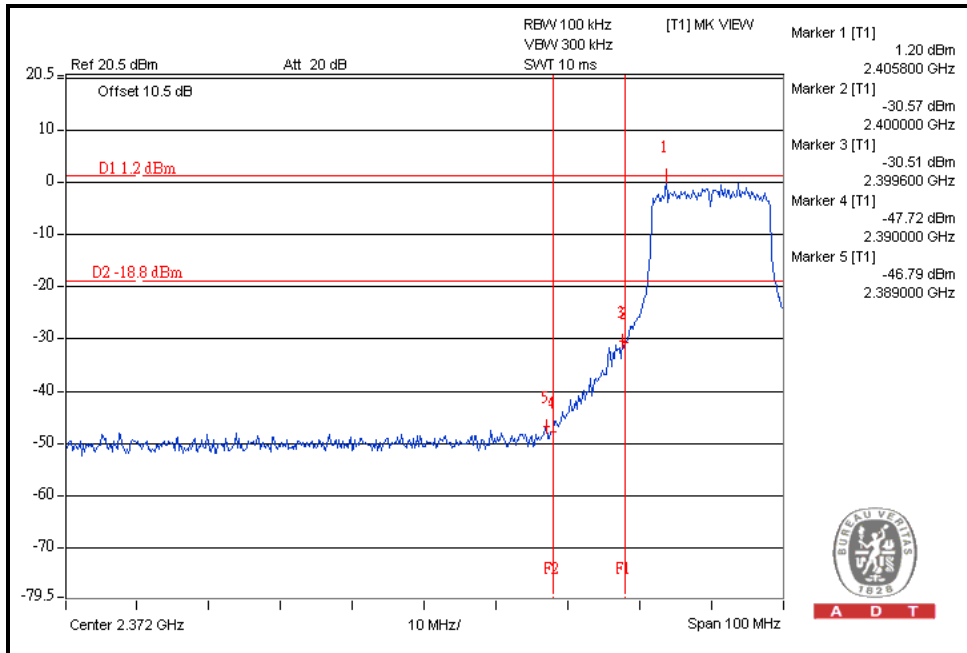





A D T

For Chain(1): CH11

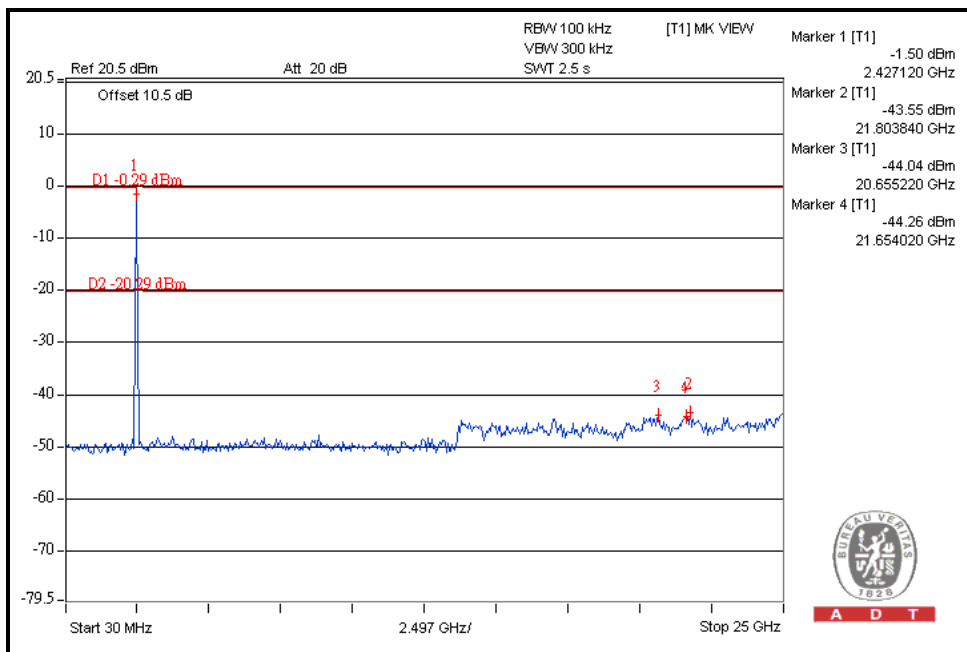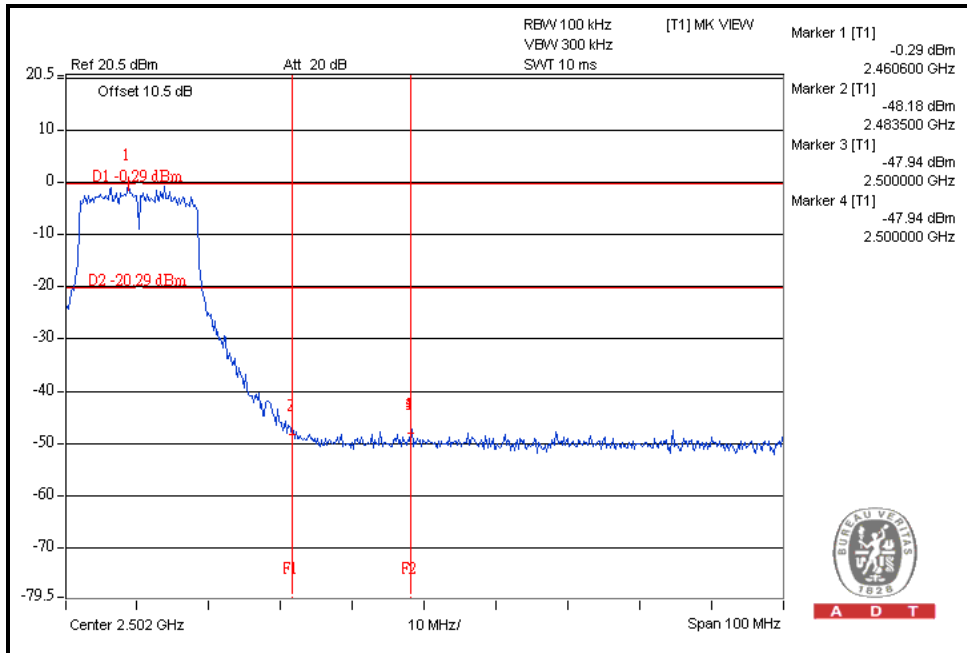

802.11n (20MHz) OFDM MODULATION:


For Chain(0) : CH1

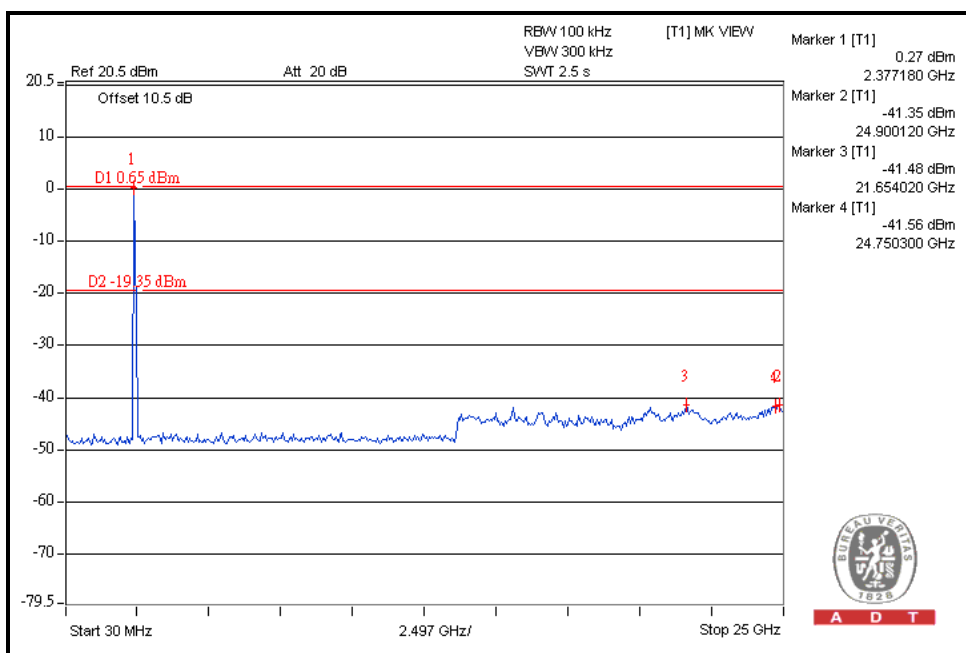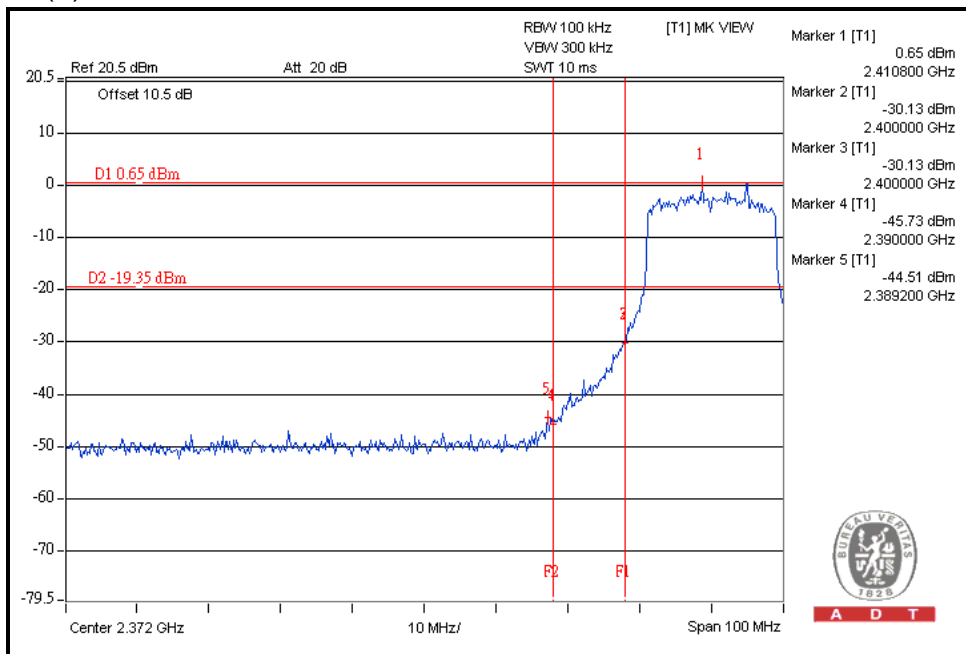




A D T

For Chain(0) : CH11

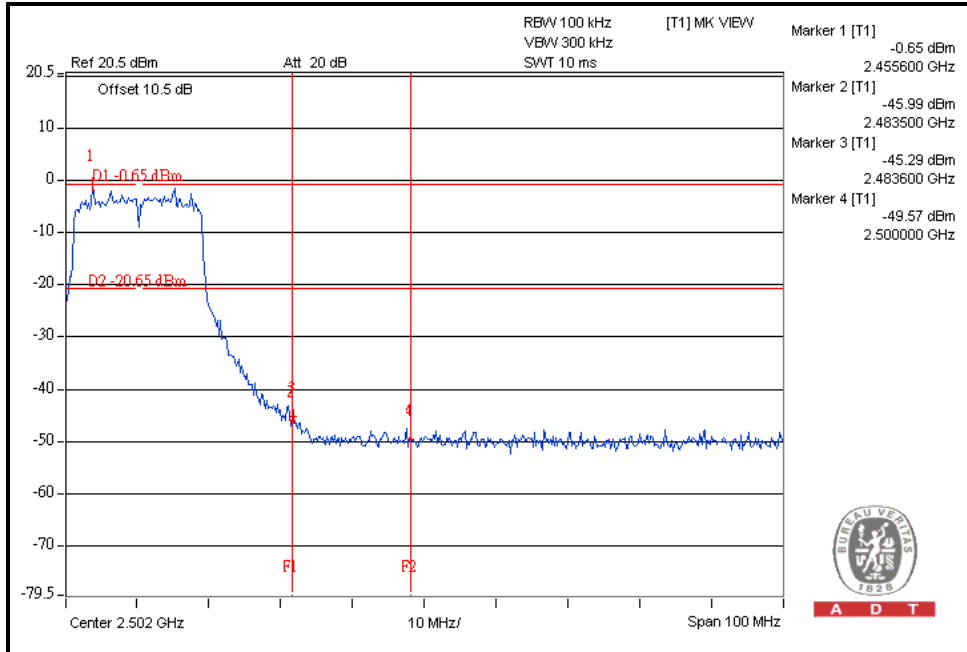

A D T


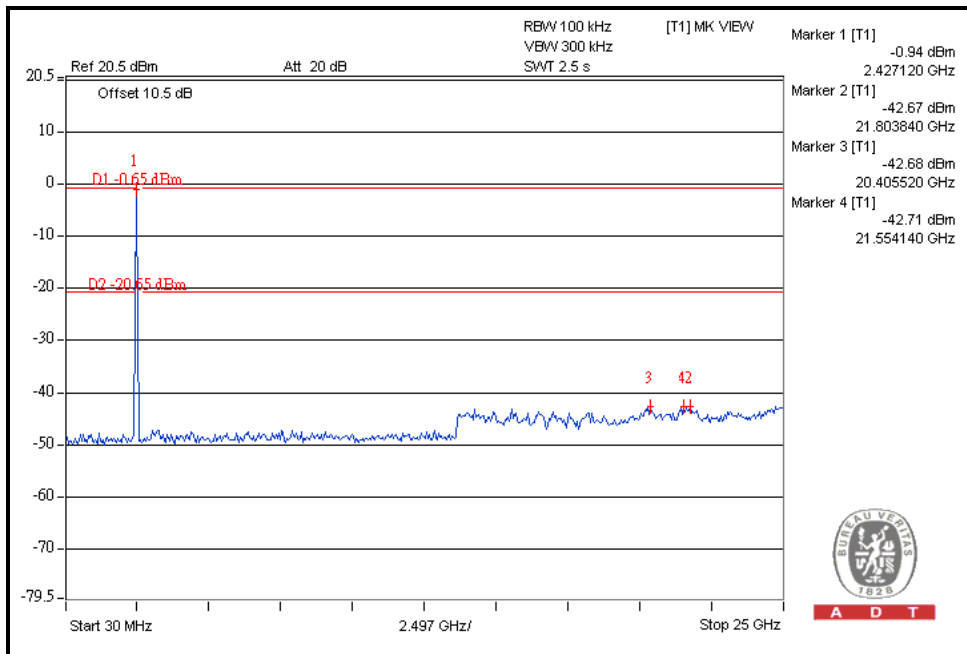


A D T



A D T



For Chain(1) : CH1

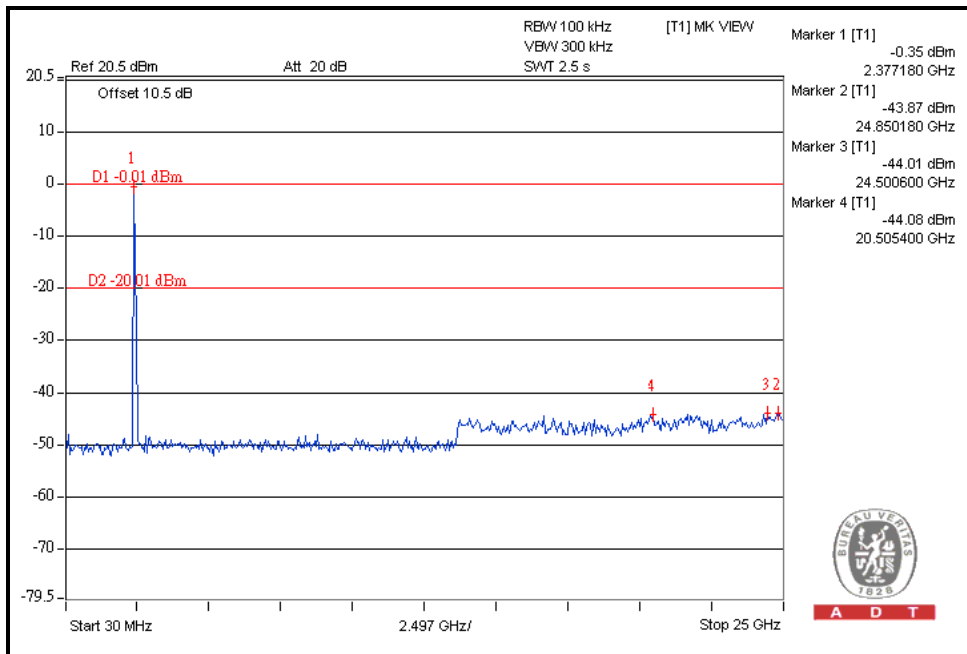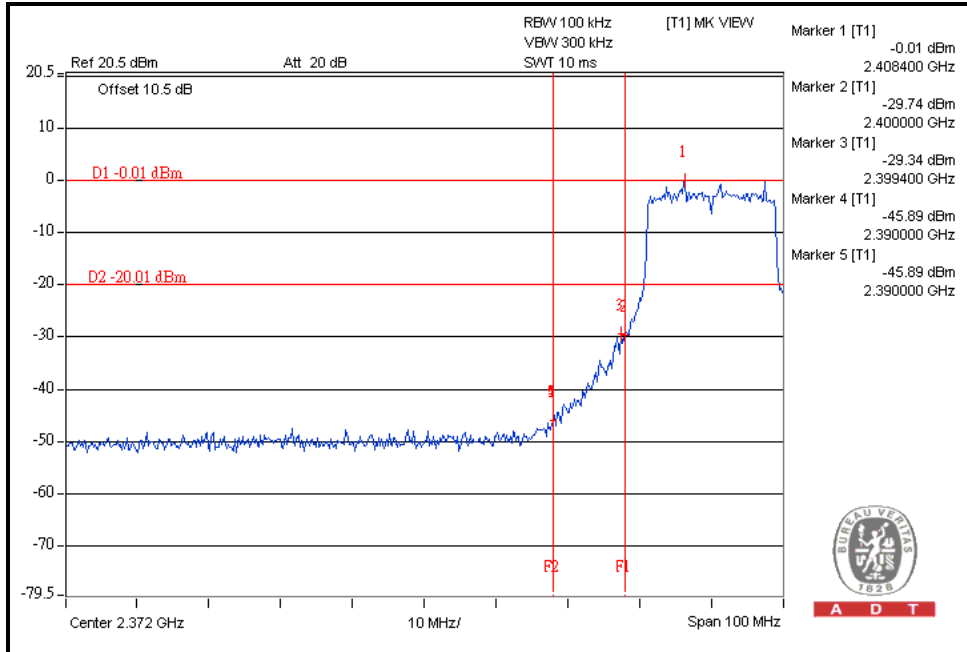





A D T

For Chain(1) : CH11

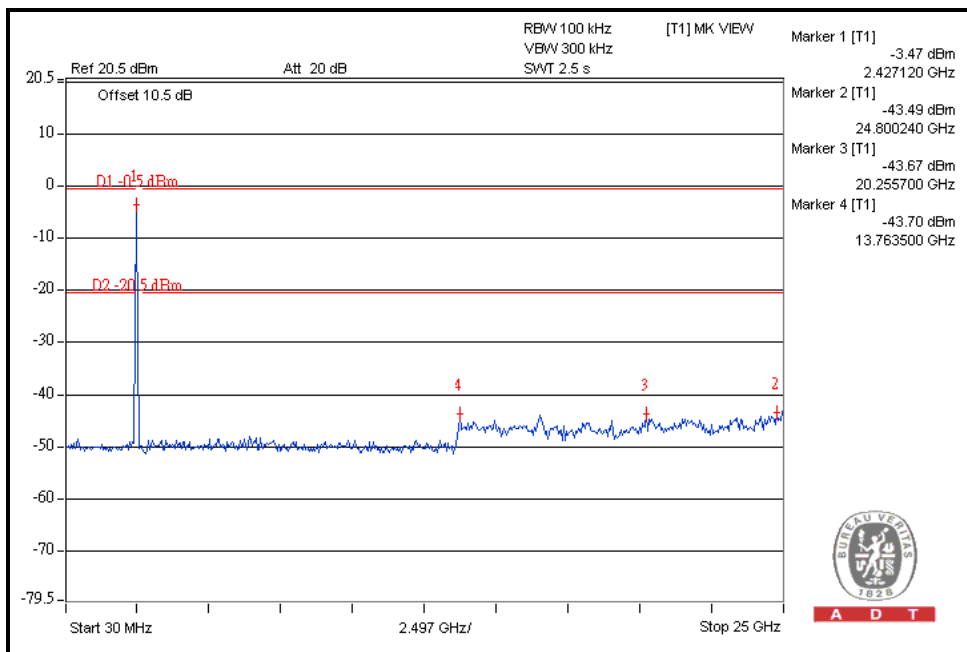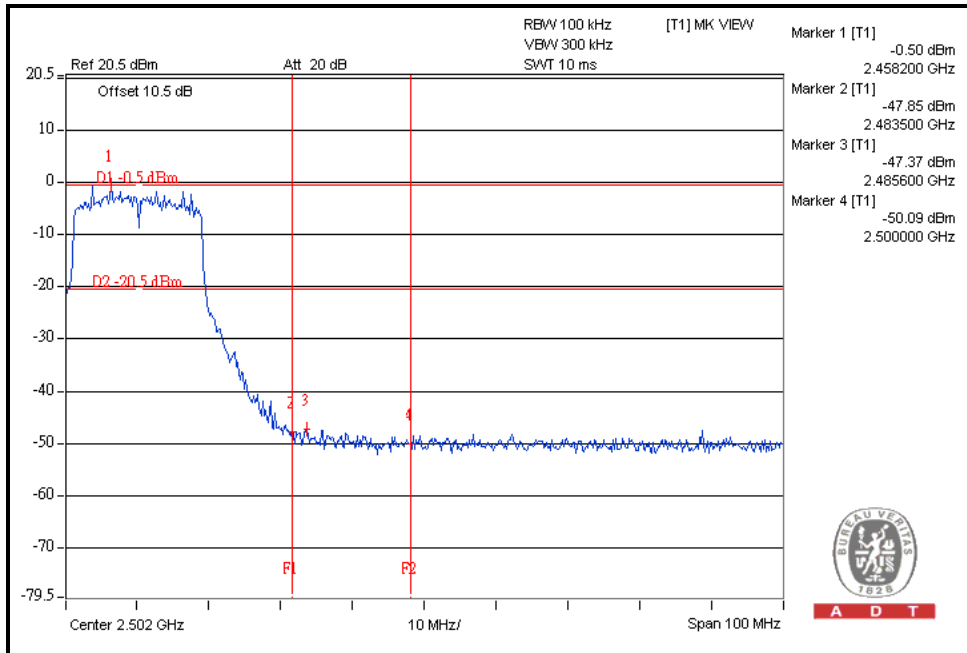

802.11n (40MHz) OFDM MODULATION:



For Chain(0) : CH3

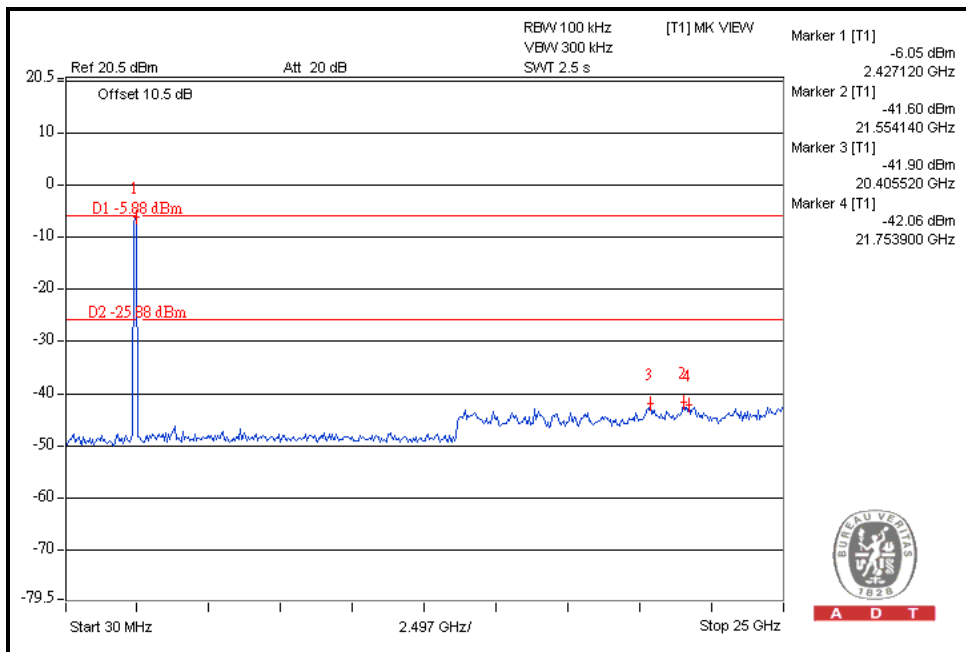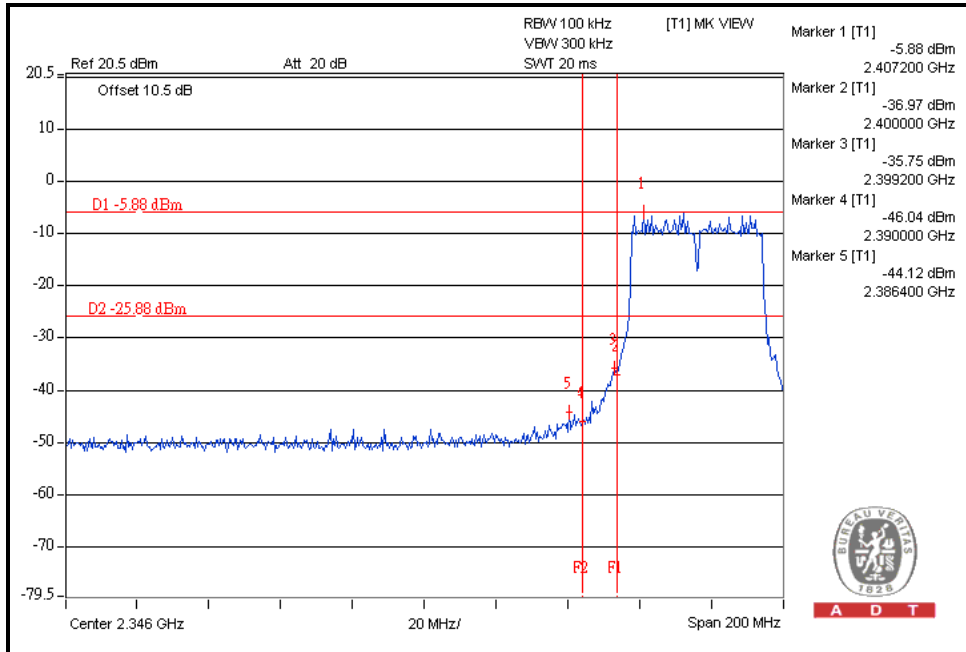



A D T



For Chain(0) : CH9

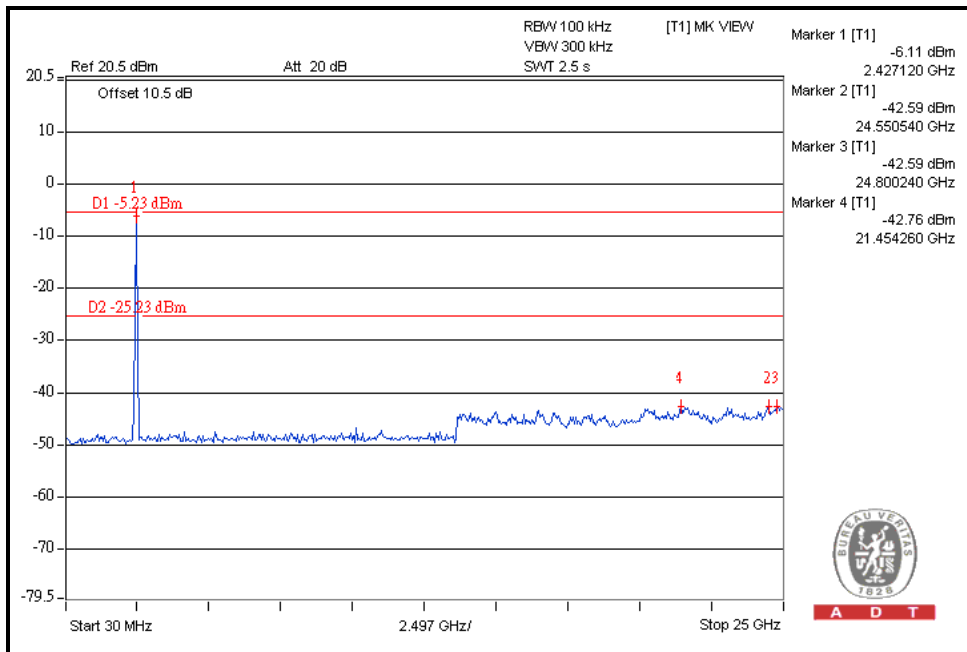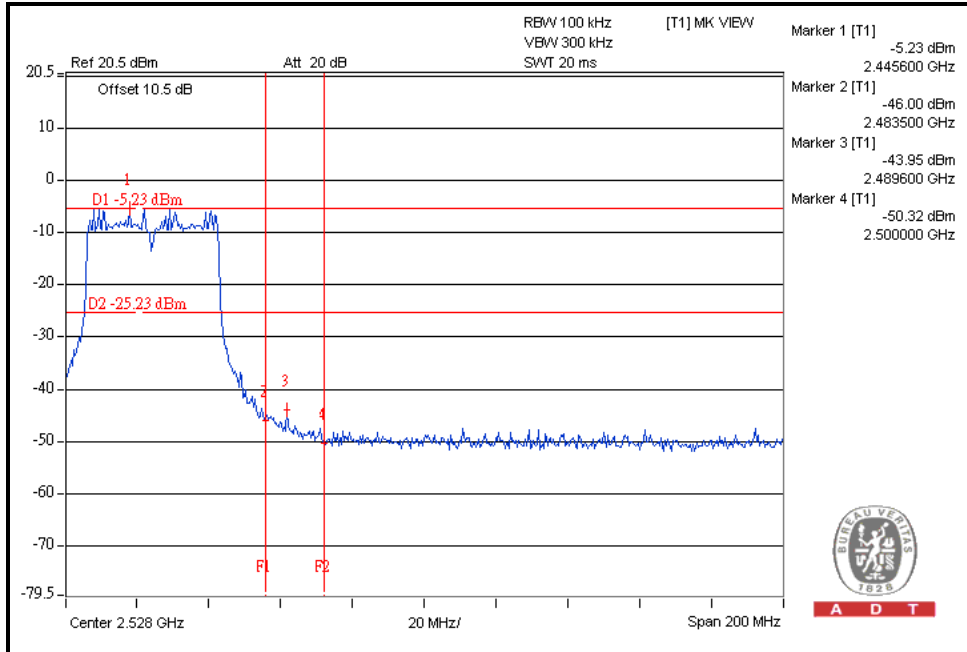



A D T



For Chain(1) : CH3

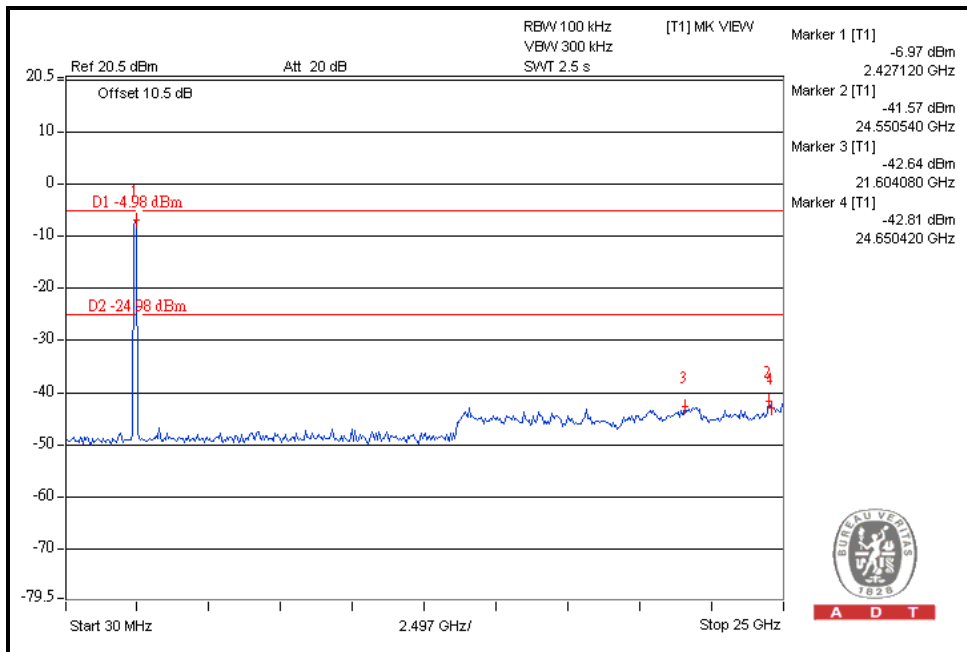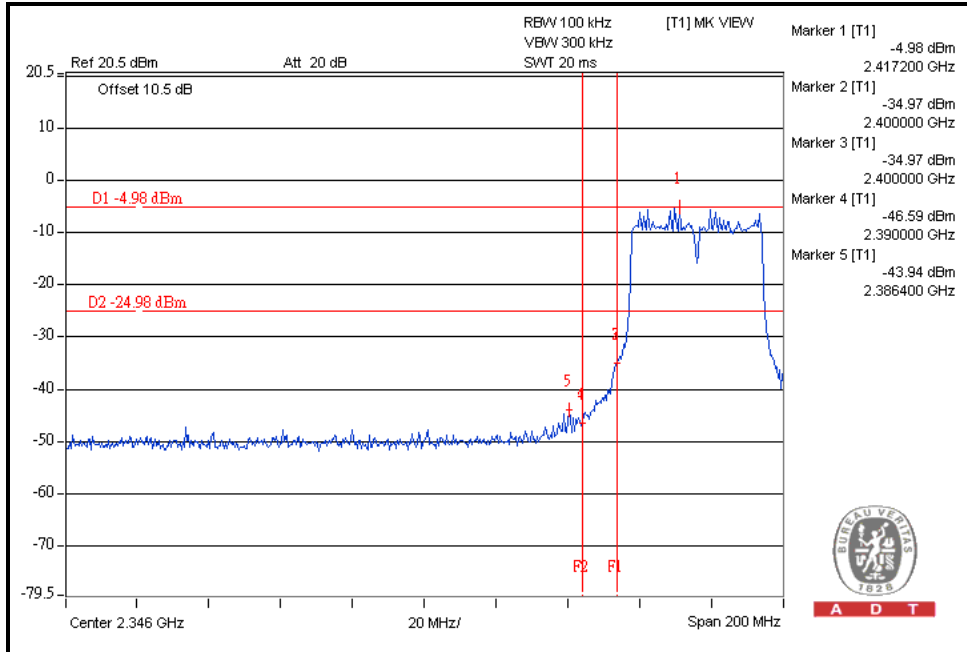



A D T

For Chain(1) : CH9

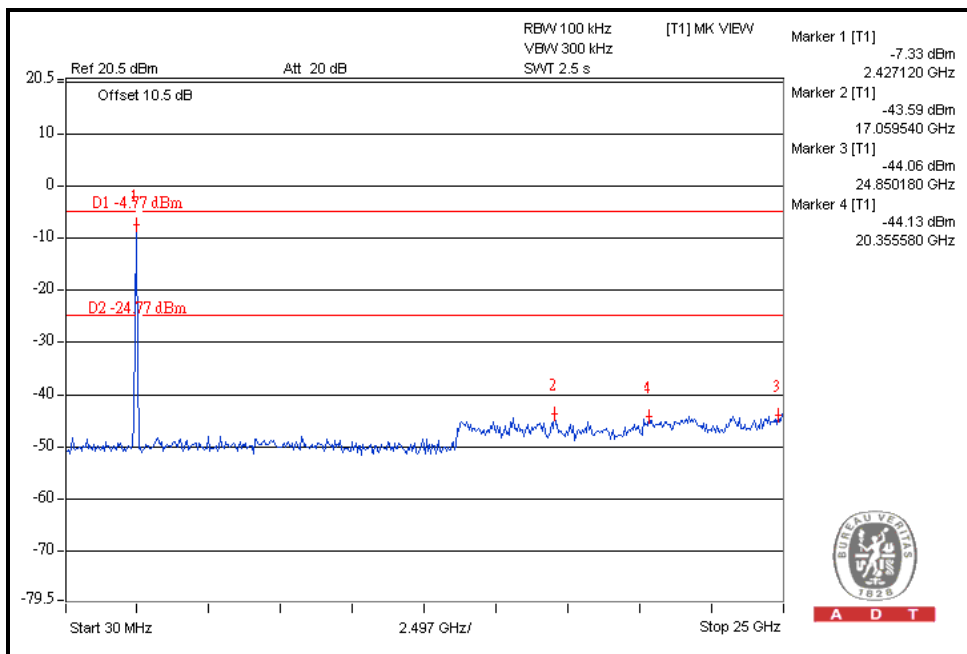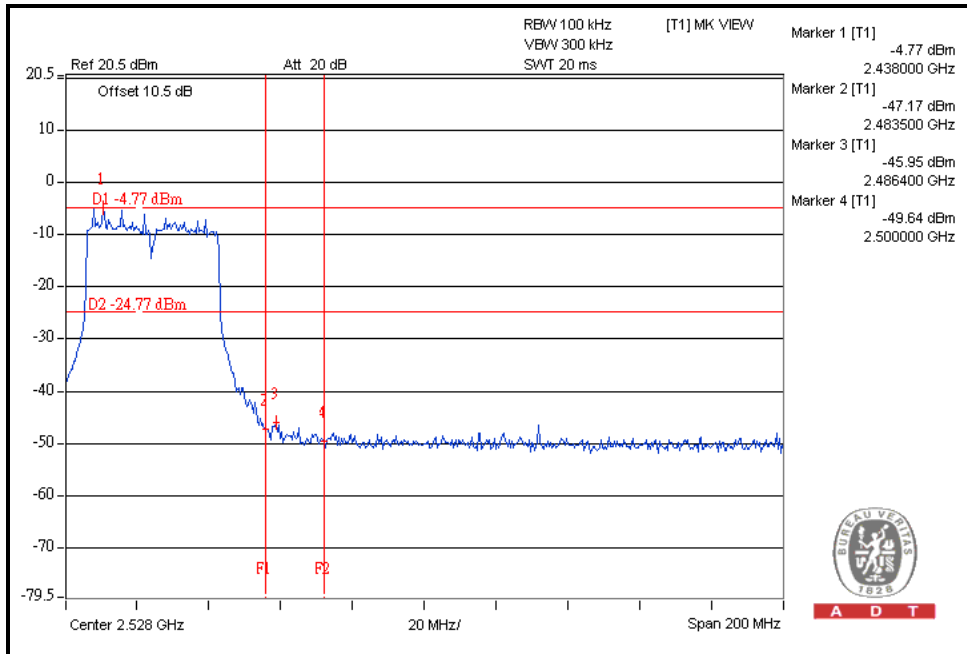

5. TEST TYPES AND RESULTS (For 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

Test date: June 21, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 02, 2011	Mar. 01, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 17, 2010	Sep. 16, 2011
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 10, 2011	June 09, 2012
RF Cable (JYEBAO)	5DFB	CONCAB-003	Aug. 06, 2010	Aug. 05, 2011
50 ohms Terminator	50	3	Nov. 03, 2010	Nov. 02, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.



A D T


5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

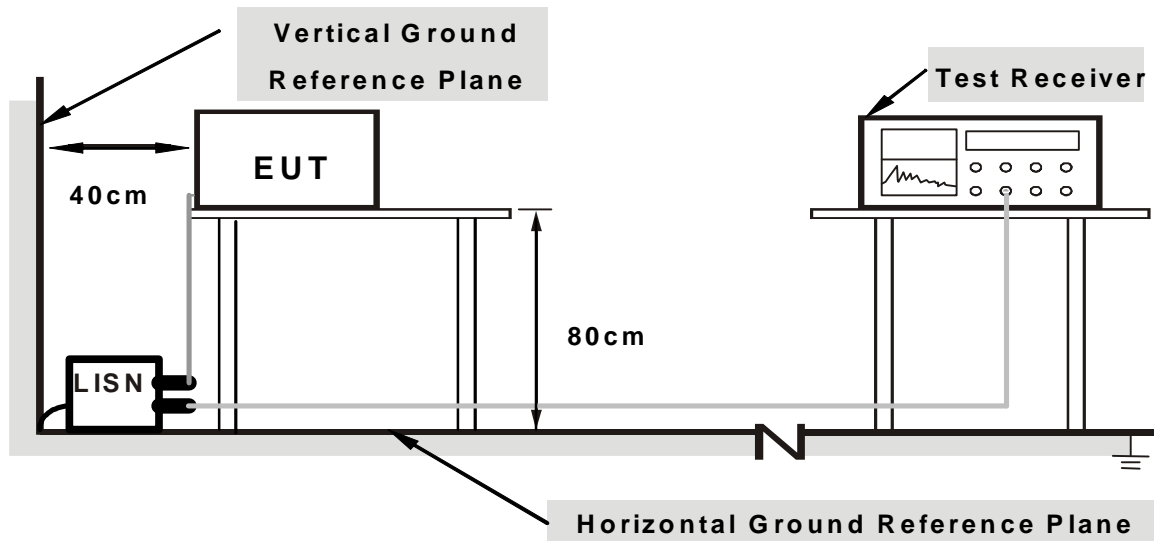

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS


Same as the 4.1.6

5.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.36	52.70	40.99	53.06	41.35	64.61	54.61	-11.55	-13.26
2	0.201	0.36	46.70	38.08	47.06	38.44	63.58	53.58	-16.52	-15.14
3	0.220	0.36	47.44	33.65	47.80	34.01	62.81	52.81	-15.01	-18.80
4	0.267	0.36	42.82	29.82	43.18	30.18	61.20	51.20	-18.02	-21.02
5	0.314	0.36	40.06	26.96	40.42	27.32	59.86	49.86	-19.44	-22.54
6	4.316	0.52	32.99	23.26	33.51	23.78	56.00	46.00	-22.49	-22.22


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

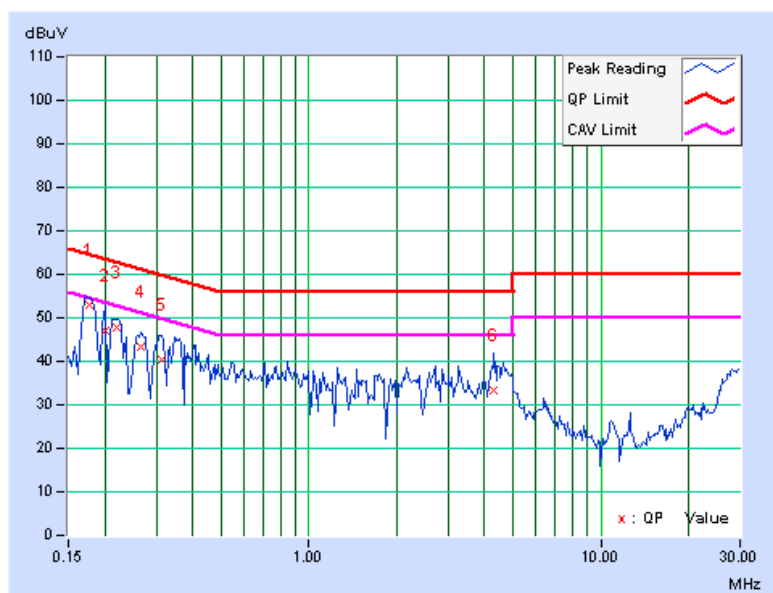

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	50.94	33.19	51.04	33.29	65.16	55.16	-14.12	-21.87
2	0.216	0.10	42.23	23.96	42.33	24.06	62.96	52.96	-20.62	-28.89
3	0.338	0.11	40.13	33.07	40.24	33.18	59.26	49.26	-19.03	-16.09
4	0.384	0.11	35.60	26.76	35.71	26.87	58.18	48.18	-22.48	-21.32
5	0.857	0.15	32.48	21.00	32.63	21.15	56.00	46.00	-23.37	-24.85
6	4.590	0.26	35.45	28.95	35.71	29.21	56.00	46.00	-20.29	-16.79
7	29.426	2.04	34.68	34.46	36.72	36.50	60.00	50.00	-23.28	-13.50

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

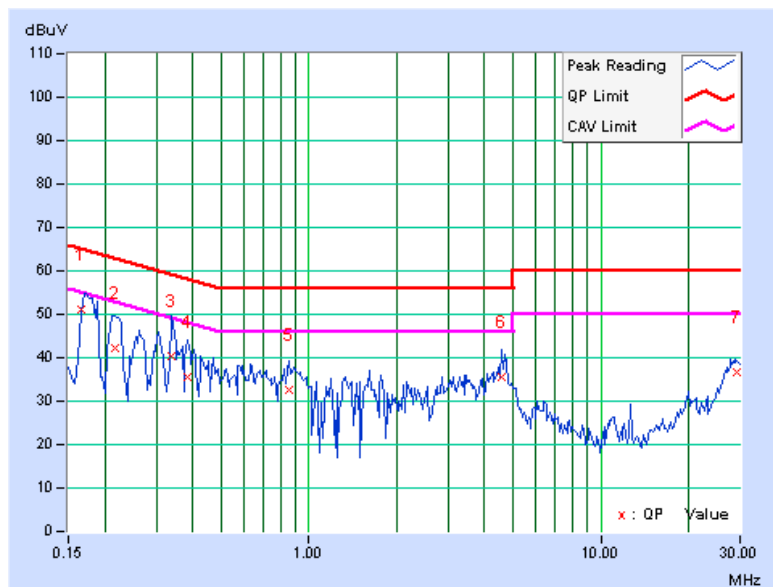



A D T

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

5.2.2 TEST INSTRUMENTS

For below 1GHz test: (Test date: July 01, 2011)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 23, 2010	Aug. 22, 2011
Agilent Pre-Selector	N9039A	MY46520310	Aug. 23, 2010	Aug. 22, 2011
Agilent Signal Generator	N5181A	MY49060347	July 30, 2010	July 29, 2011
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 22, 2010	Nov. 21, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 28, 2010	Dec. 27, 2011
RF Cable	NA	CHHCAB_001	NA	NA
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.



A D T

For above 1GHz test: (Test date: July 04, 2011)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011
Agilent PSA Spectrum Analyzer	E4446A	MY48250113	Nov. 30 , 2010	Nov. 29 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 01, 2010	Oct. 31, 2011
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 14, 2011	Apr. 13, 2012
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 17, 2010	Dec. 16, 2011
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 17, 2011	Jan. 16, 2012
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M- 1GHz	NA	NA
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for below 1GHz test and 3 meter open field site for above 1GHz test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD


No deviation

5.2.5 TEST SETUP

<Frequency Range below 1GHz>

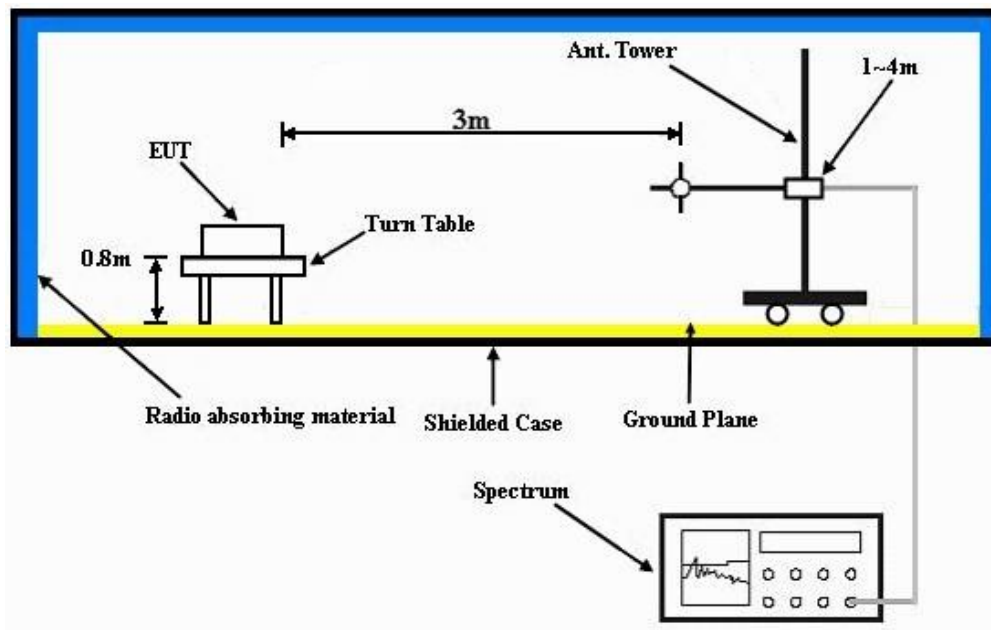

<Frequency Range above 1GHz>

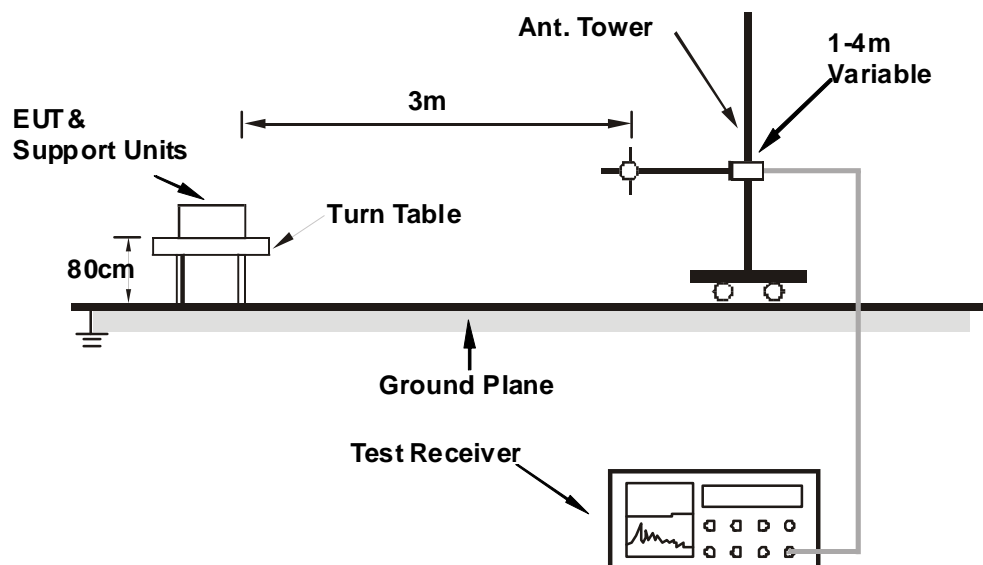

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6



A D T

5.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 69%RH 1003 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.03	34.6 QP	43.5	-8.9	2.00 H	103	25.65	8.98
2	146.29	33.7 QP	43.5	-9.8	1.25 H	80	19.40	14.34
3	211.66	34.2 QP	43.5	-9.3	1.25 H	358	22.57	11.64
4	375.08	39.1 QP	46.0	-6.9	1.00 H	202	22.30	16.79
5	500.02	34.8 QP	46.0	-11.3	1.50 H	269	15.22	19.53
6	750.13	25.3 QP	46.0	-20.7	1.00 H	258	2.02	23.27
7	875.06	32.0 QP	46.0	-14.0	1.00 H	356	6.51	25.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.25	36.9 QP	40.0	-3.1	1.00 V	21	23.09	13.77
2	135.28	33.6 QP	43.5	-9.9	1.00 V	43	19.88	13.68
3	249.91	34.0 QP	46.0	-12.0	1.75 V	360	20.95	13.04
4	375.00	39.4 QP	46.0	-6.7	1.25 V	286	22.56	16.79
5	500.02	39.0 QP	46.0	-7.0	1.00 V	355	19.47	19.53
6	624.96	25.1 QP	46.0	-20.9	1.25 V	351	3.41	21.73
7	875.06	28.3 QP	46.0	-17.8	1.25 V	114	2.78	25.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	95.7 PK			1.32 H	136	54.15	41.55
2	*5745.00	87.0 AV			1.32 H	136	45.45	41.55
3	11490.00	59.0 PK	74.0	-15.0	1.37 H	9	11.29	47.71
4	11490.00	49.6 AV	54.0	-4.4	1.37 H	9	1.89	47.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	116.9 PK			1.37 V	197	75.35	41.55
2	*5745.00	107.9 AV			1.37 V	197	66.35	41.55
3	11490.00	58.4 PK	74.0	-15.6	1.31 V	20	10.69	47.71
4	11490.00	47.5 AV	54.0	-6.5	1.31 V	20	-0.21	47.71

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	95.6 PK			1.36 H	124	53.92	41.68
2	*5785.00	86.8 AV			1.36 H	124	45.12	41.68
3	11570.00	59.2 PK	74.0	-14.8	1.41 H	13	11.45	47.75
4	11570.00	49.6 AV	54.0	-4.4	1.41 H	13	1.85	47.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.0 PK			1.31 V	187	75.32	41.68
2	*5785.00	107.7 AV			1.31 V	187	66.02	41.68
3	11570.00	58.6 PK	74.0	-15.4	1.32 V	16	10.85	47.75
4	11570.00	47.7 AV	54.0	-6.3	1.32 V	16	-0.05	47.75

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - “ * ”: Fundamental frequency.
 - The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	95.4 PK			1.36 H	134	53.62	41.78
2	*5825.00	87.0 AV			1.36 H	134	45.22	41.78
3	11650.00	58.8 PK	74.0	-15.2	1.40 H	16	10.97	47.83
4	11650.00	49.5 AV	54.0	-4.5	1.40 H	16	1.67	47.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	117.0 PK			1.31 V	185	75.22	41.78
2	*5825.00	107.8 AV			1.31 V	185	66.02	41.78
3	11650.00	58.6 PK	74.0	-15.4	1.26 V	19	10.77	47.83
4	11650.00	47.8 AV	54.0	-6.2	1.26 V	19	-0.03	47.83

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	93.7 PK			1.35 H	134	52.15	41.55
2	*5745.00	85.2 AV			1.35 H	134	43.65	41.55
3	11490.00	59.1 PK	74.0	-14.9	1.42 H	12	11.39	47.71
4	11490.00	49.6 AV	54.0	-4.4	1.42 H	12	1.89	47.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.0 PK			1.35 V	197	73.45	41.55
2	*5745.00	106.1 AV			1.35 V	197	64.55	41.55
3	11490.00	58.4 PK	74.0	-15.6	1.25 V	26	10.69	47.71
4	11490.00	47.3 AV	54.0	-6.7	1.25 V	26	-0.41	47.71

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	93.8 PK			1.31 H	135	52.12	41.68
2	*5785.00	85.2 AV			1.31 H	135	43.52	41.68
3	11570.00	59.1 PK	74.0	-14.9	1.47 H	22	11.35	47.75
4	11570.00	49.5 AV	54.0	-4.5	1.47 H	22	1.75	47.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.9 PK			1.32 V	187	73.22	41.68
2	*5785.00	106.2 AV			1.32 V	187	64.52	41.68
3	11570.00	58.8 PK	74.0	-15.2	1.27 V	14	11.05	47.75
4	11570.00	47.5 AV	54.0	-6.5	1.27 V	14	-0.25	47.75

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	93.4 PK			1.37 H	123	51.62	41.78
2	*5825.00	84.9 AV			1.37 H	123	43.12	41.78
3	11650.00	58.6 PK	74.0	-15.4	1.37 H	15	10.77	47.83
4	11650.00	49.3 AV	54.0	-4.7	1.37 H	15	1.47	47.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	115.2 PK			1.30 V	208	73.42	41.78
2	*5825.00	106.3 AV			1.30 V	208	64.52	41.78
3	11650.00	58.4 PK	74.0	-15.6	1.28 V	20	10.57	47.83
4	11650.00	47.1 AV	54.0	-6.9	1.28 V	20	-0.73	47.83

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	90.4 PK			1.40 H	128	48.81	41.59
2	*5755.00	82.0 AV			1.40 H	128	40.41	41.59
3	11510.00	59.0 PK	74.0	-15.0	1.37 H	19	11.28	47.72
4	11510.00	49.3 AV	54.0	-4.7	1.37 H	19	1.58	47.72

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	112.0 PK			1.33 V	203	70.41	41.59
2	*5755.00	102.9 AV			1.33 V	203	61.31	41.59
3	11510.00	58.1 PK	74.0	-15.9	1.26 V	12	10.38	47.72
4	11510.00	47.0 AV	54.0	-7.0	1.26 V	12	-0.72	47.72

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH 1003 hPa	TESTED BY	Kent Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	90.7 PK			1.37 H	123	49.00	41.70
2	*5795.00	82.1 AV			1.37 H	123	40.40	41.70
3	11590.00	59.0 PK	74.0	-15.0	1.42 H	13	11.24	47.76
4	11590.00	49.2 AV	54.0	-4.8	1.42 H	13	1.44	47.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.9 PK			1.31 V	192	70.20	41.70
2	*5795.00	102.9 AV			1.31 V	192	61.20	41.70
3	11590.00	58.4 PK	74.0	-15.6	1.25 V	26	10.64	47.76
4	11590.00	47.2 AV	54.0	-6.8	1.25 V	26	-0.56	47.76

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The limit value is defined as per 15.247.

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

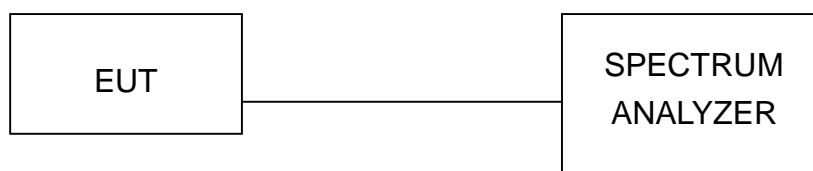

5.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

5.3.7 TEST RESULTS

802.11a OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	16.39	0.5	PASS
157	5785	16.39	0.5	PASS
165	5825	16.40	0.5	PASS

CH165

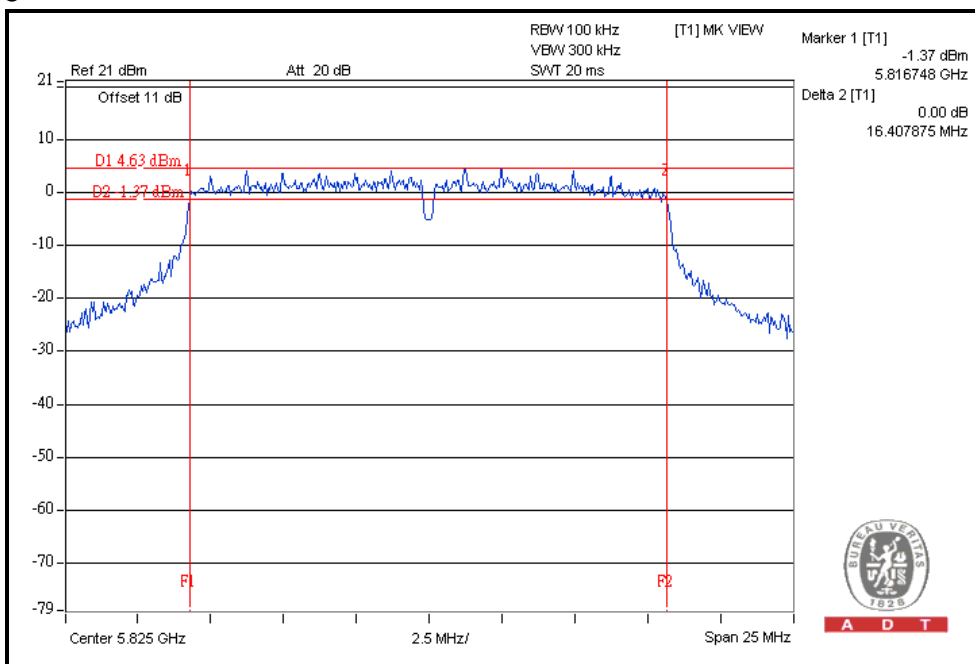




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	17.62	0.5	PASS
157	5785	17.61	0.5	PASS
165	5825	17.61	0.5	PASS

CH149

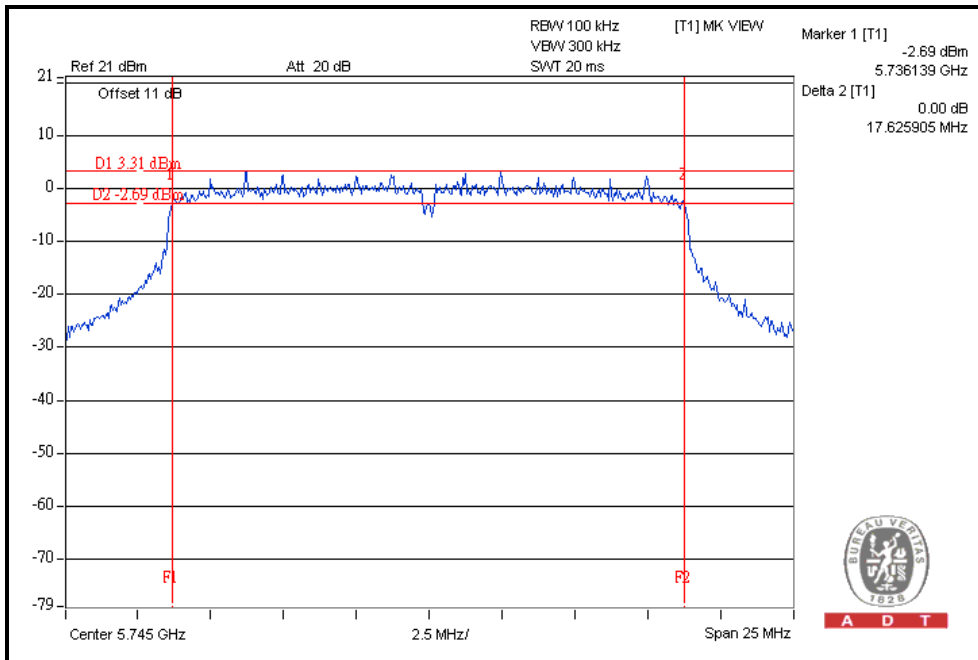




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
151	5755	36.52	0.5	PASS
159	5795	36.45	0.5	PASS

CH151

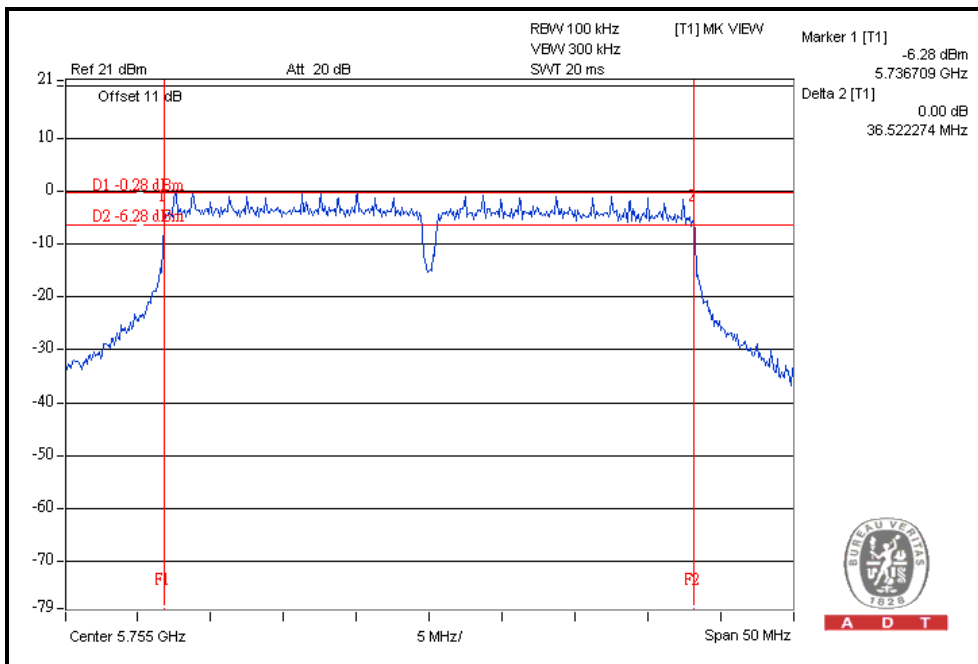

5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP

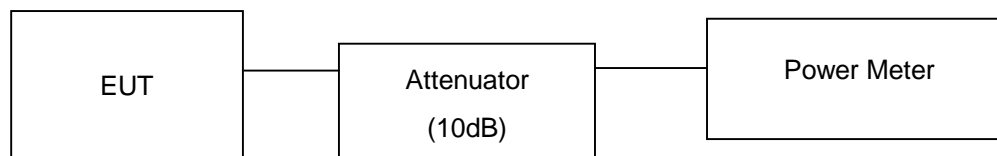

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

5.4.7 TEST RESULTS

802.11a OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
149	5745	23.6	23.5	453.0	26.6	27	PASS
157	5785	23.6	23.0	428.6	26.3	27	PASS
165	5825	23.5	23.1	428.0	26.3	27	PASS

Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi)=9

The effective legacy gain is 9dBi, therefore the limit needs to reduce.

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
149	5745	22.7	22.5	364.0	25.6	30	PASS
157	5785	23.1	22.6	386.1	25.9	30	PASS
165	5825	23.0	22.4	373.3	25.7	30	PASS

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
151	5755	23.1	22.8	394.7	26.0	30	PASS
159	5795	23.4	22.7	405.0	26.1	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8 dBm.

5.5.2 TEST INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6

5.5.7 TEST RESULTS

802.11a OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
149	5745	-9.3	-8.6	-5.9	8	PASS
157	5785	-9.4	-9.0	-6.2	8	PASS
165	5825	-8.1	-7.7	-4.9	8	PASS

For Chain(1): CH165

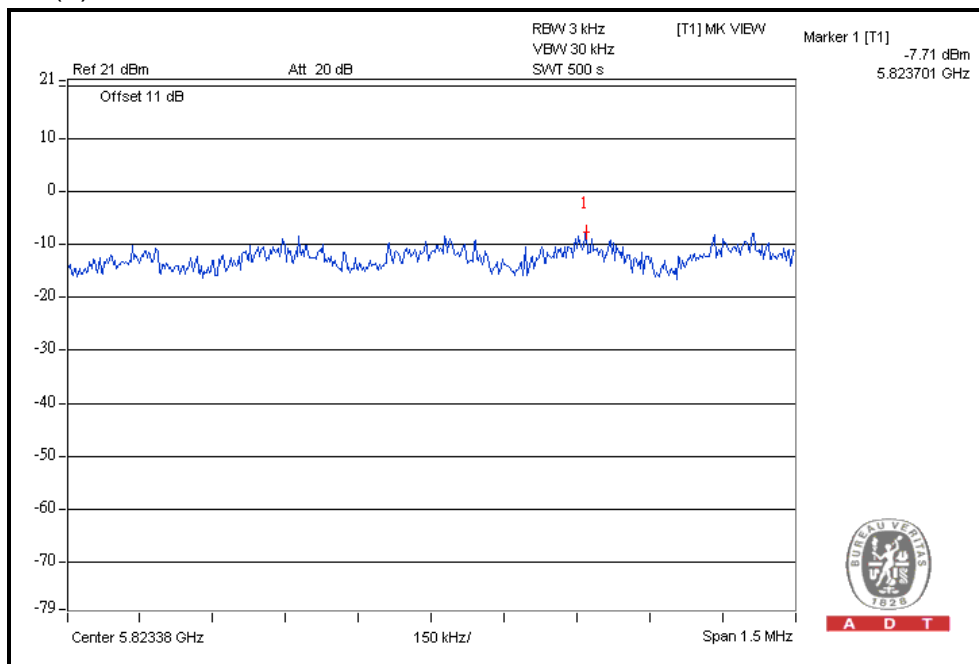




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
149	5745	-7.8	-10.5	-5.9	8	PASS
157	5785	-10.9	-10.2	-7.5	8	PASS
165	5825	-9.7	-10.2	-6.9	8	PASS

For Chain(0): CH149

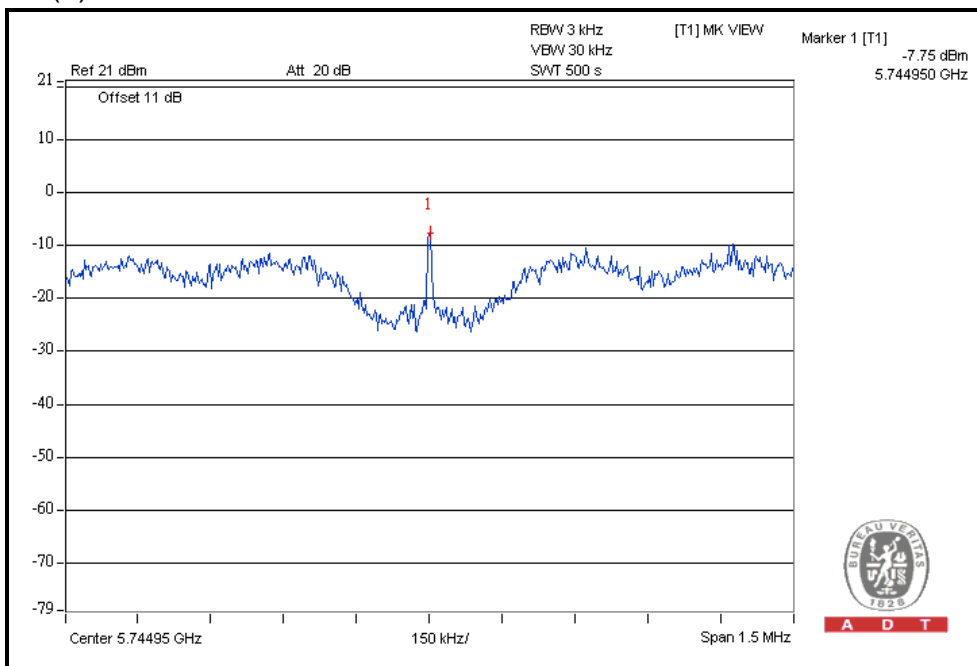




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)			
151	5755	-13.8	-13.7	-10.7	8	PASS
159	5795	-9.2	-13.3	-7.8	8	PASS

For Chain(0): CH159

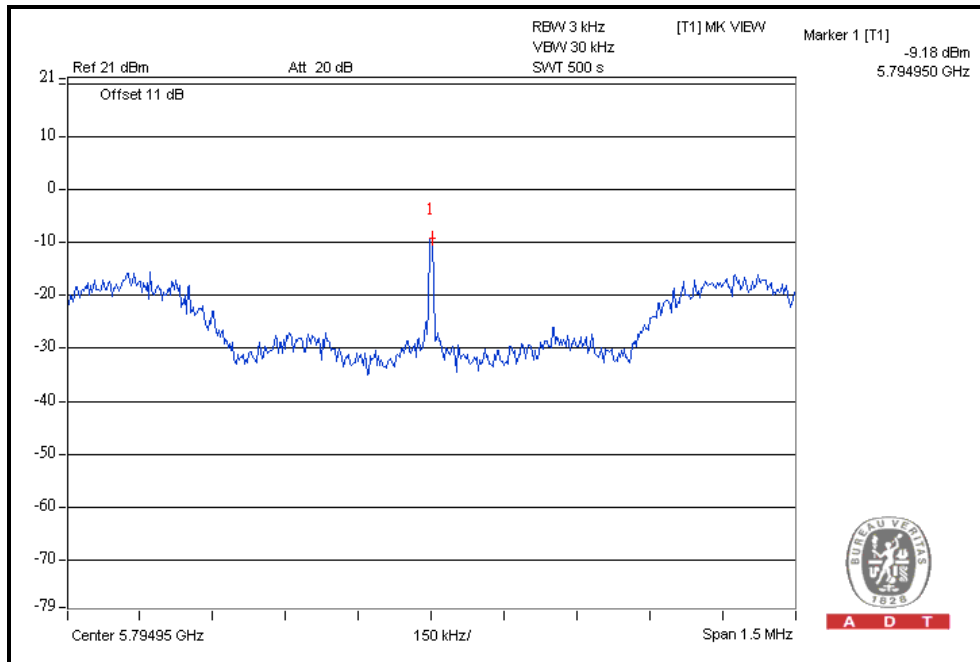

5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Test date: July 04, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100 kHz with suitable frequency span including 100MHz or 200MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.6 TEST RESULTS



The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



A D T

802.11a OFDM modulation



For Chain(0): CH149

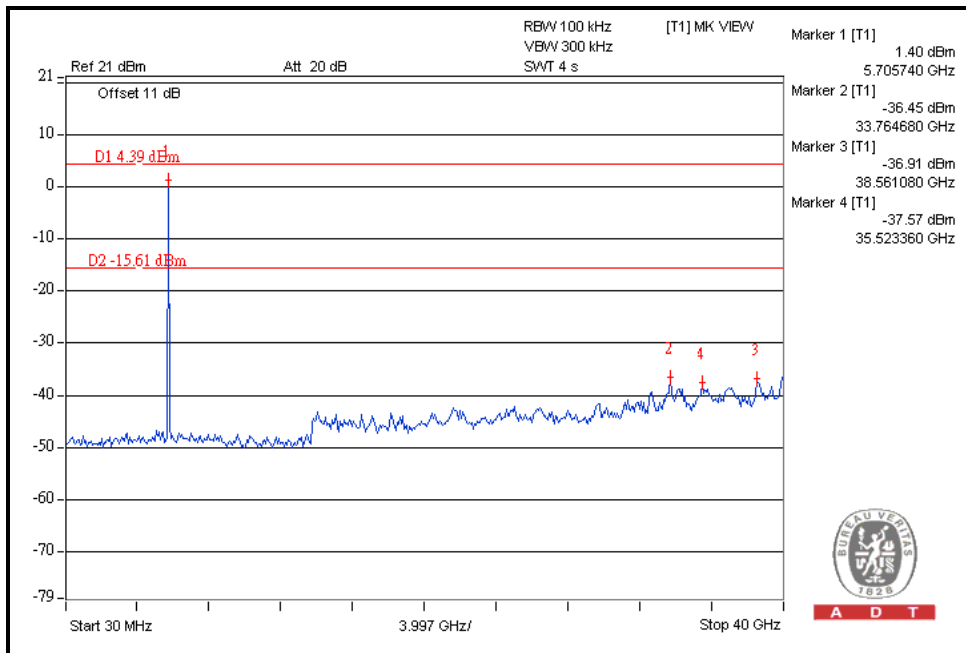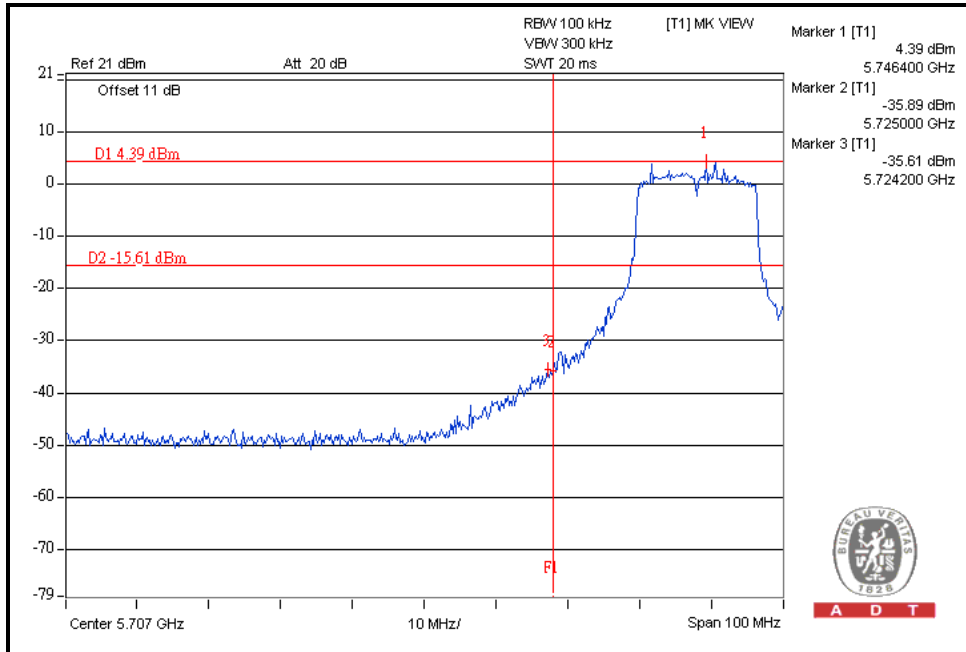



A D T



For Chain(0) : CH165

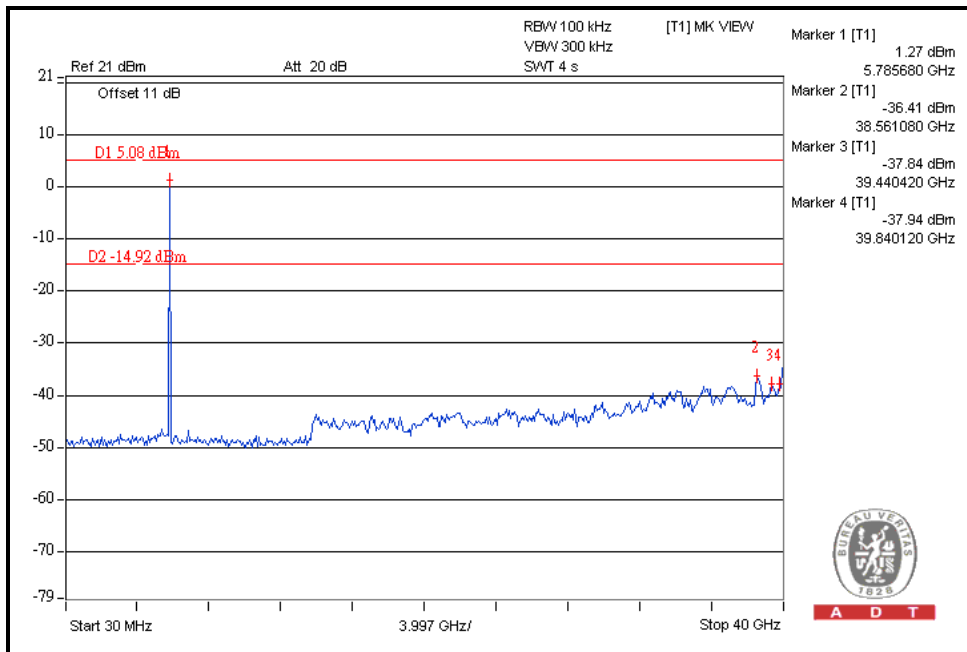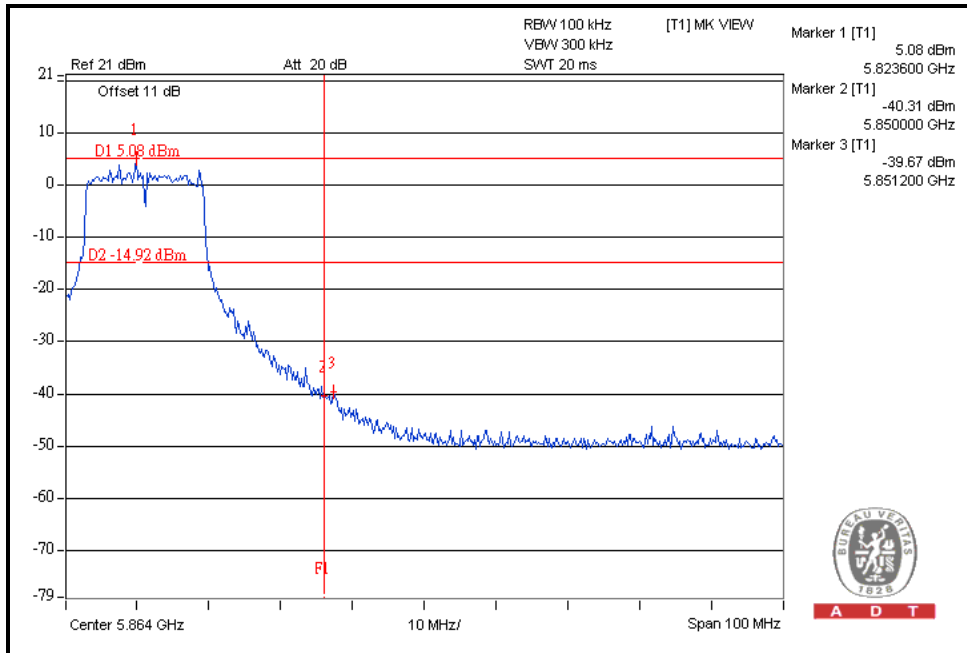



A D T



For Chain(1): CH149

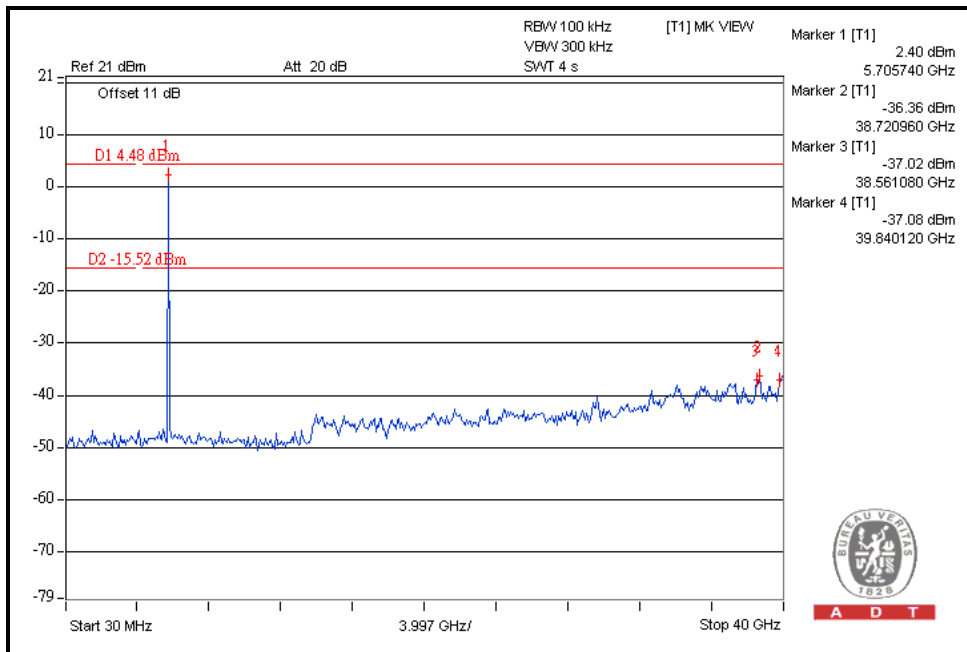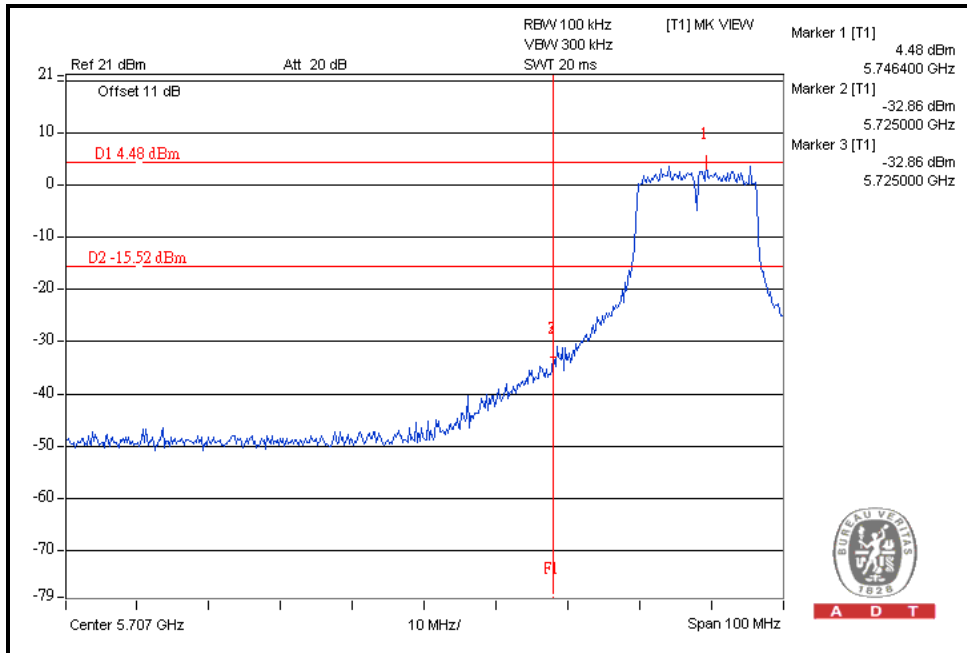



A D T

For Chain(1) : CH165

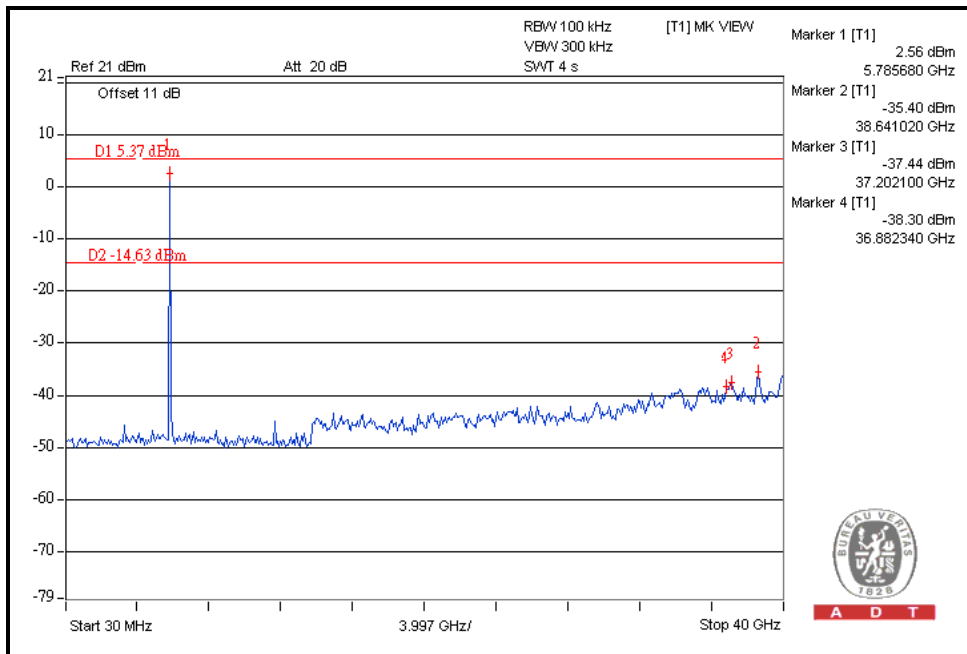
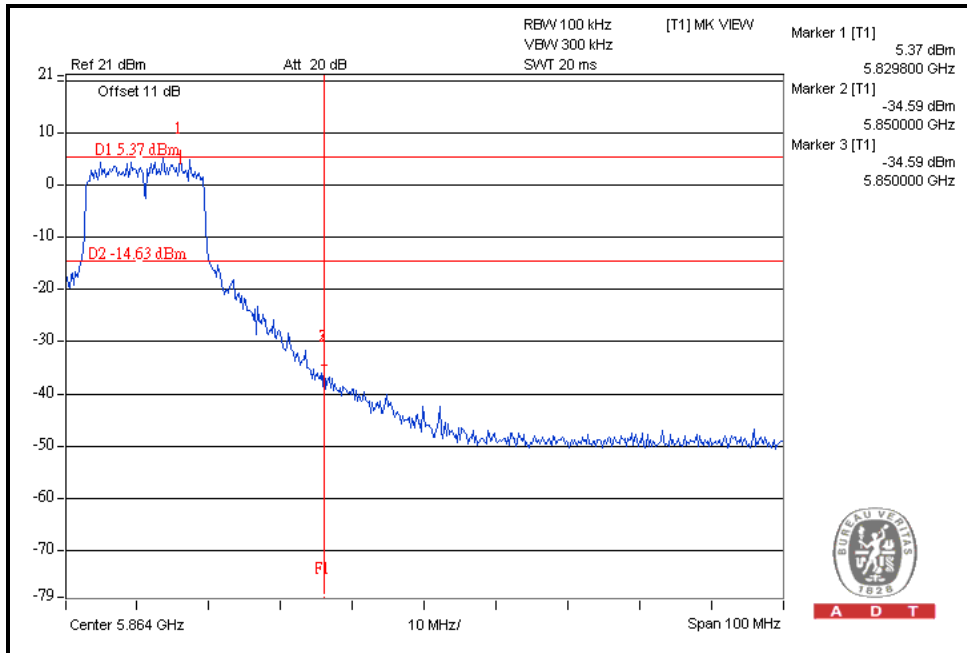




A D T

802.11n (20MHz) OFDM MODULATION:



For Chain(0) : CH149

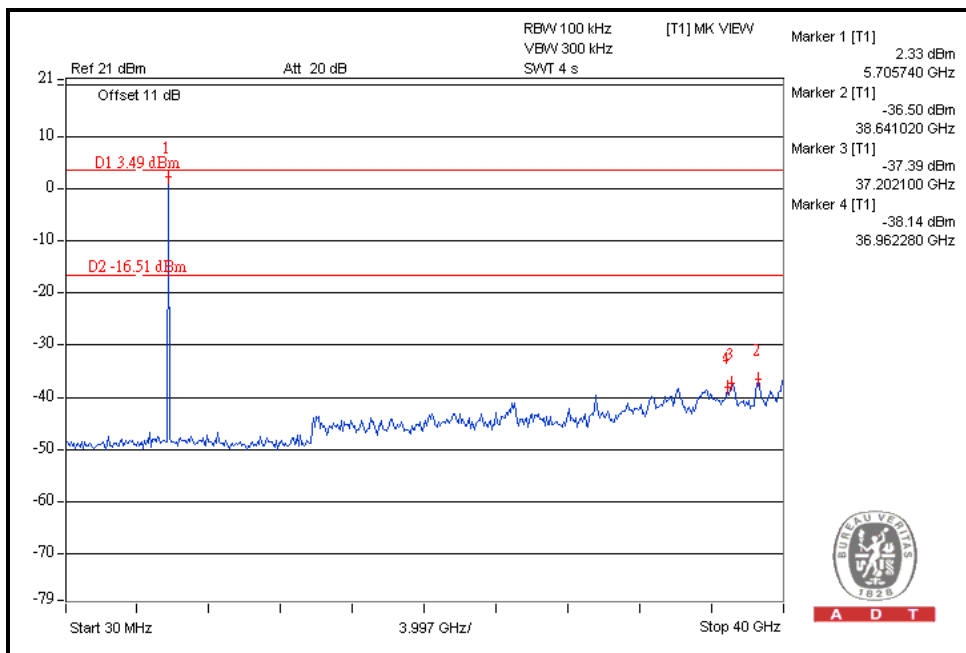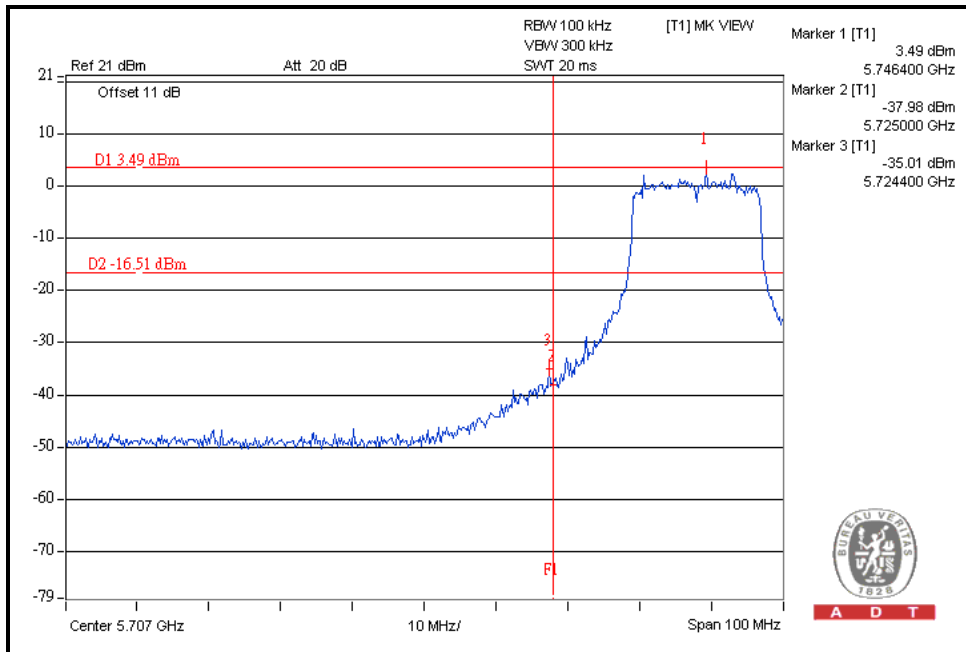





A D T

For Chain(0) : CH165

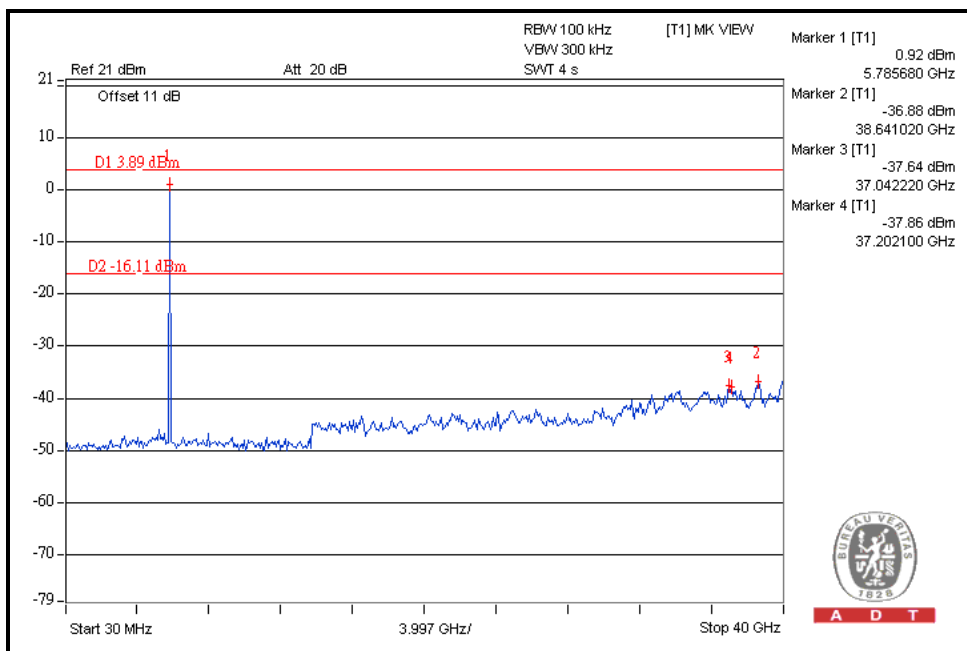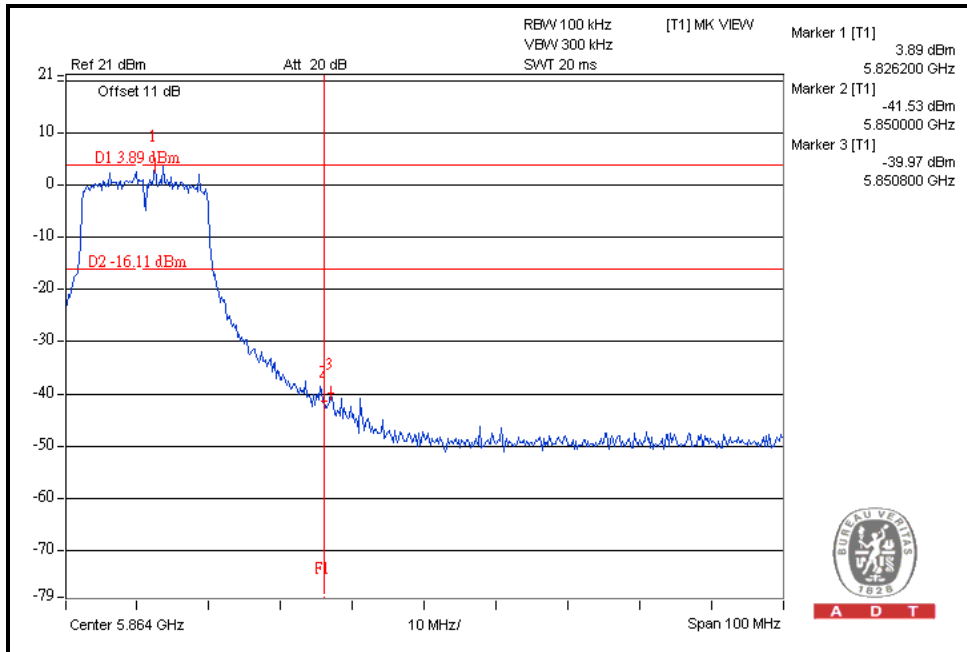



For Chain(1) : CH149

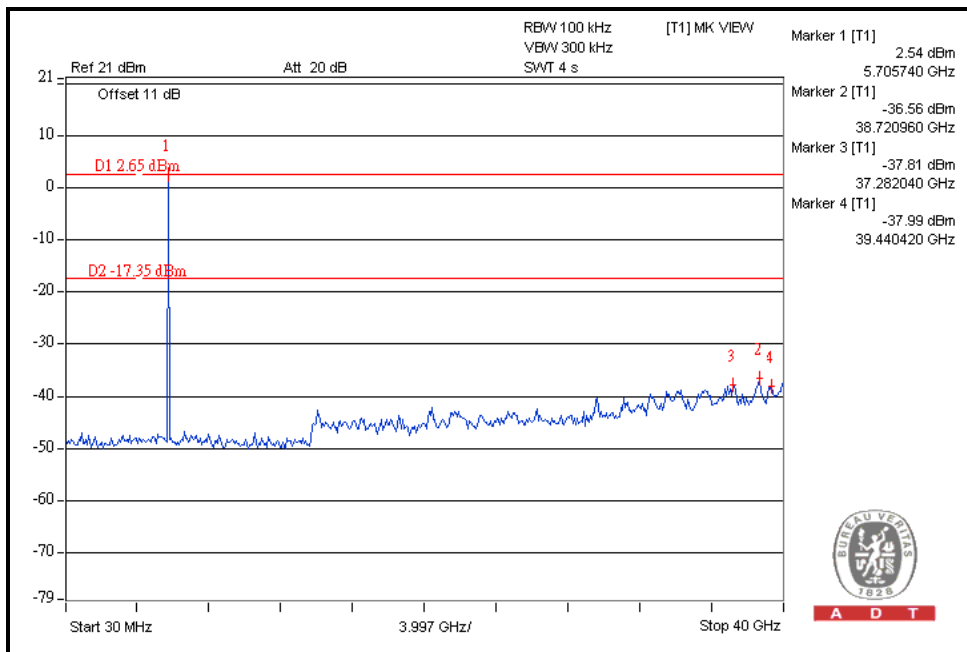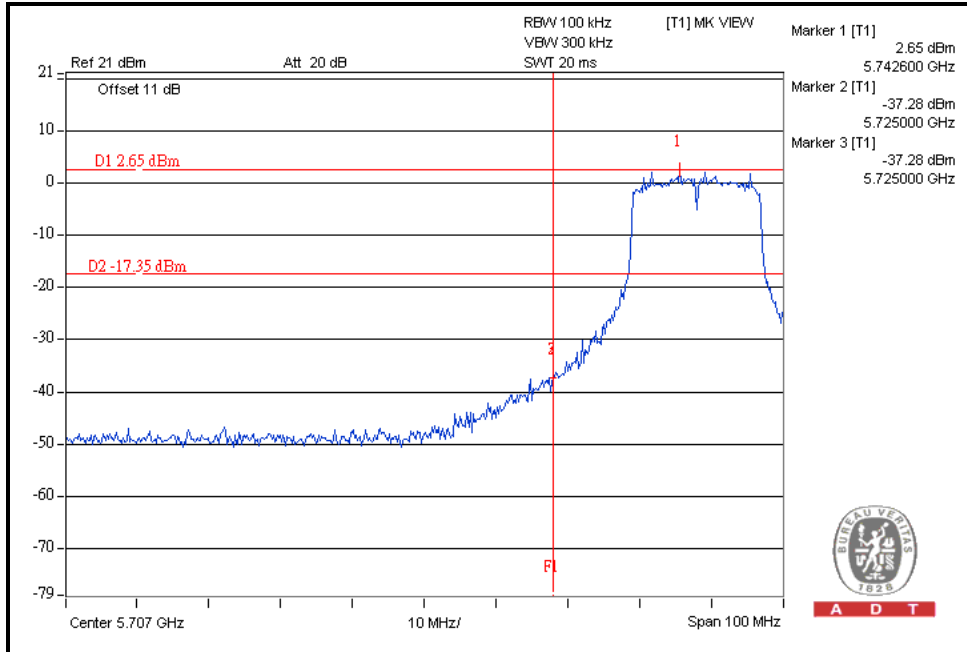



A D T

For Chain(1) : CH165

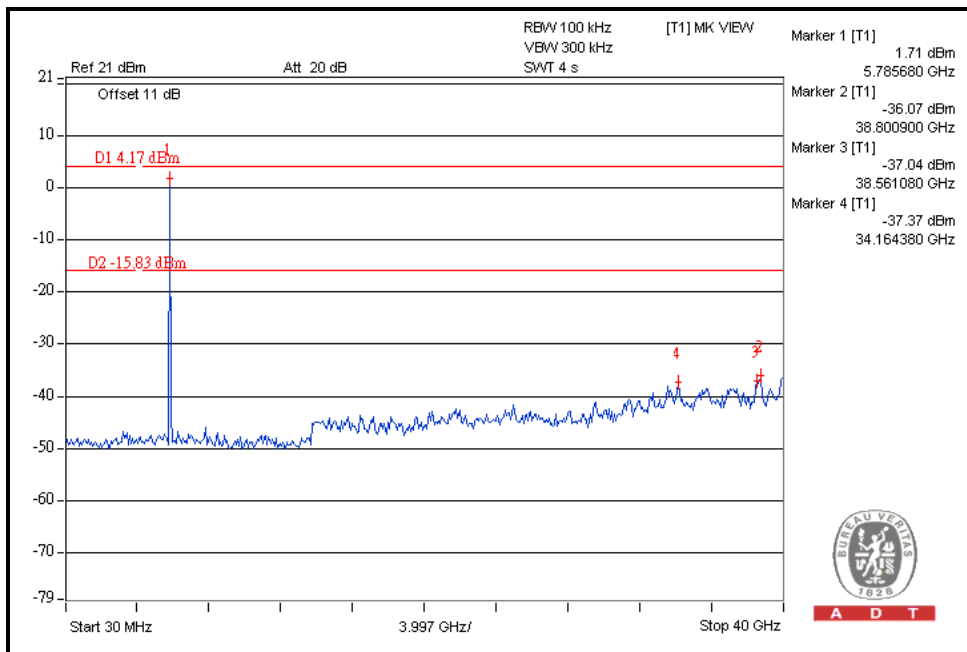
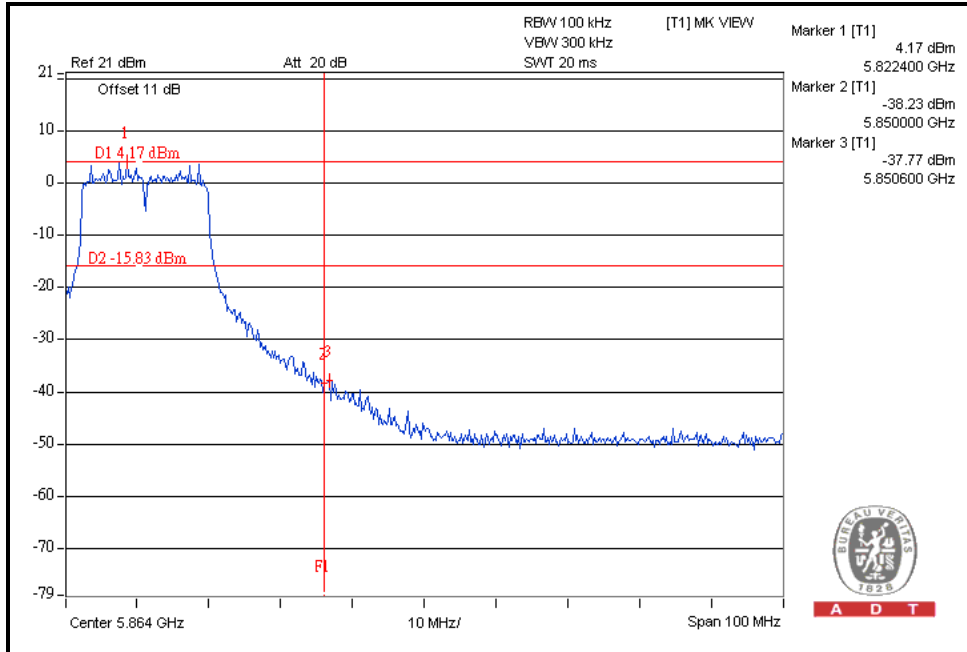




A D T

802.11n (40MHz) OFDM MODULATION:


For Chain(0) : CH151

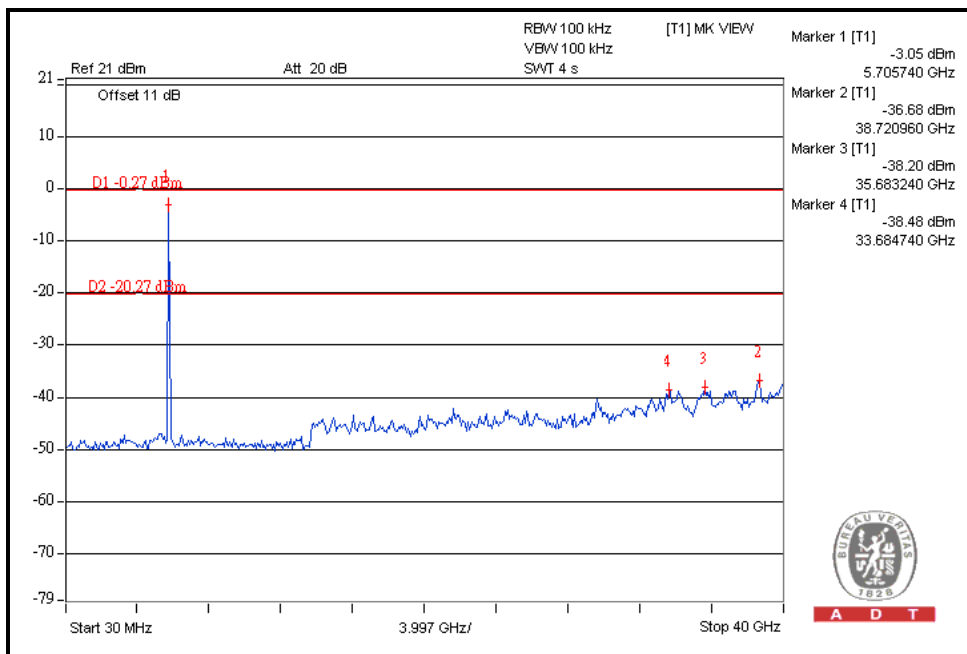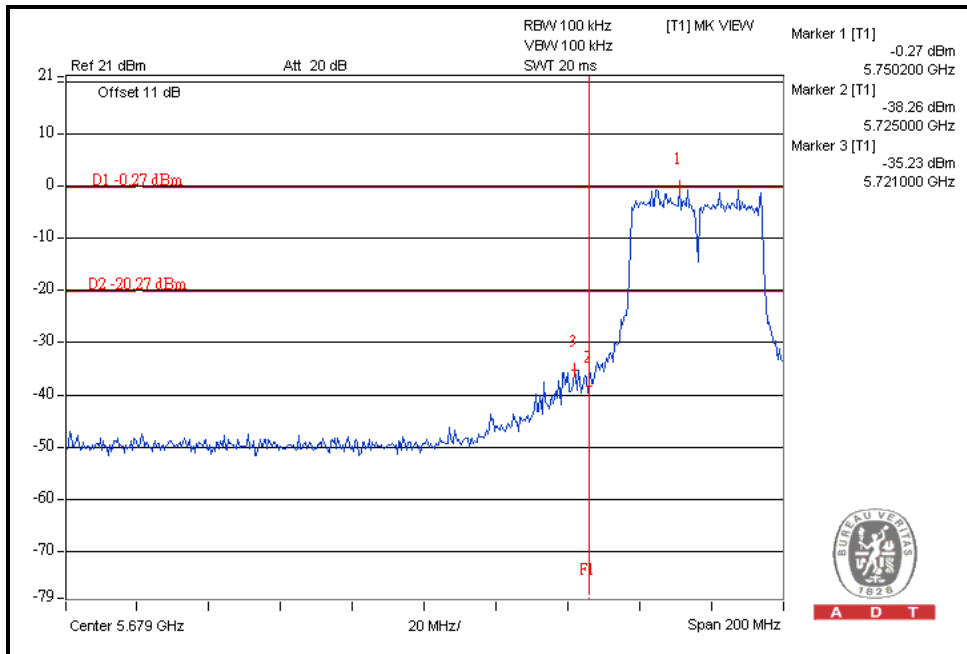




A D T

For Chain(0) : CH159

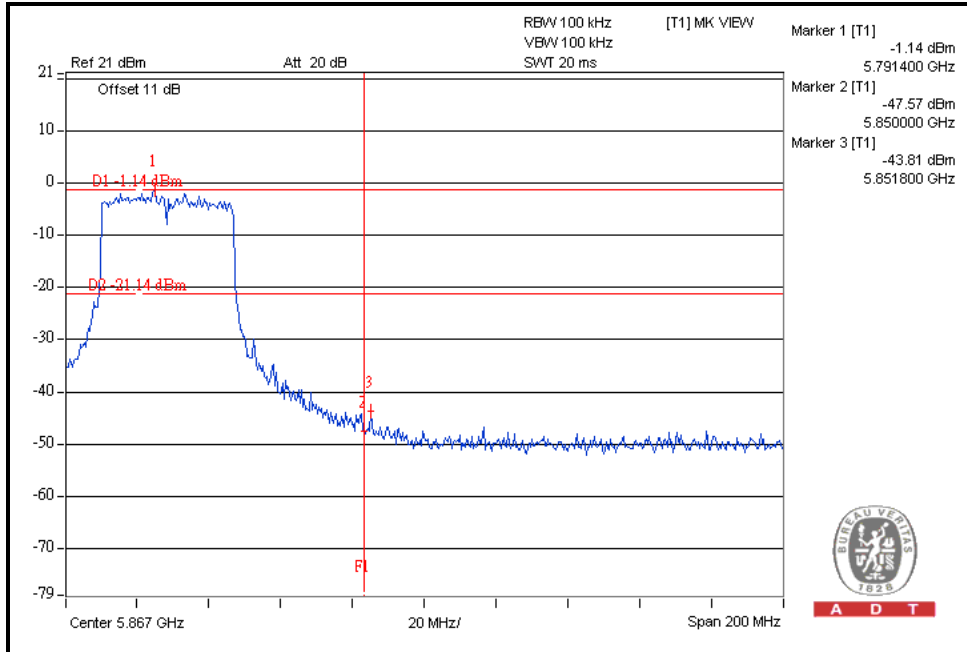

A D T


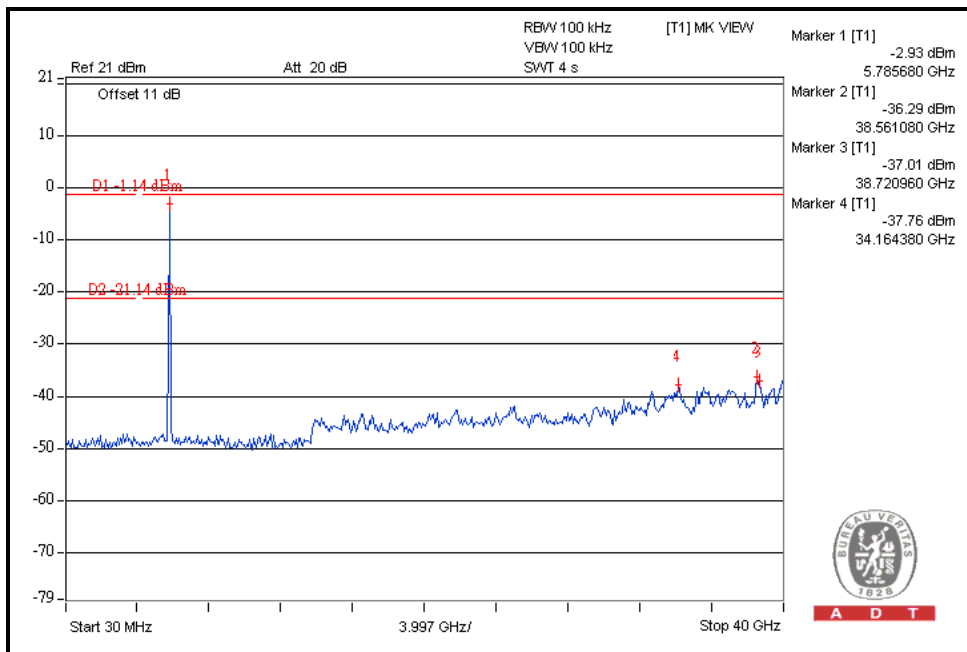


A D T



A D T



For Chain(1) : CH151

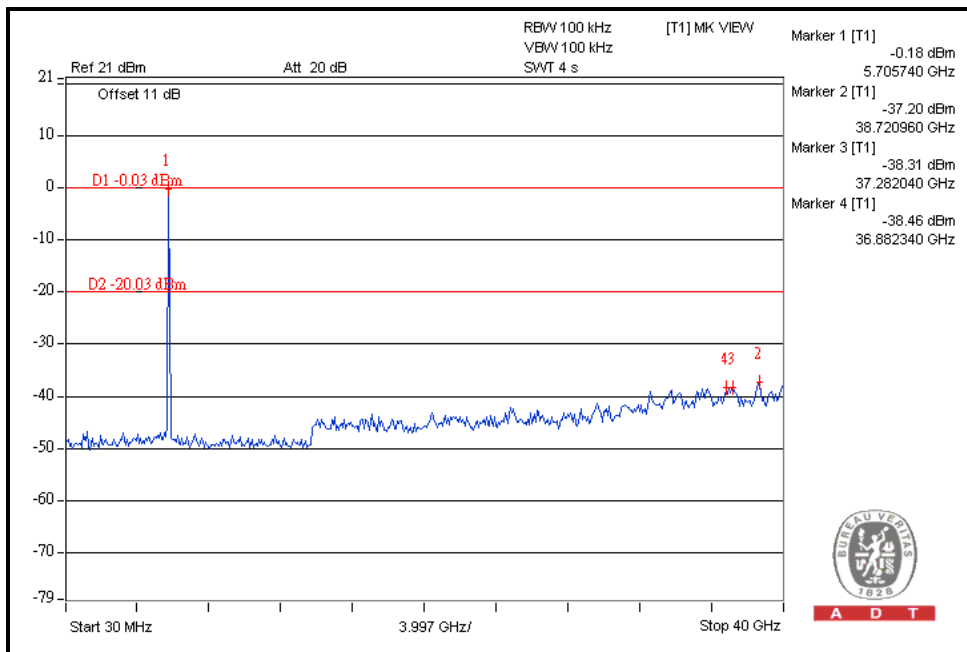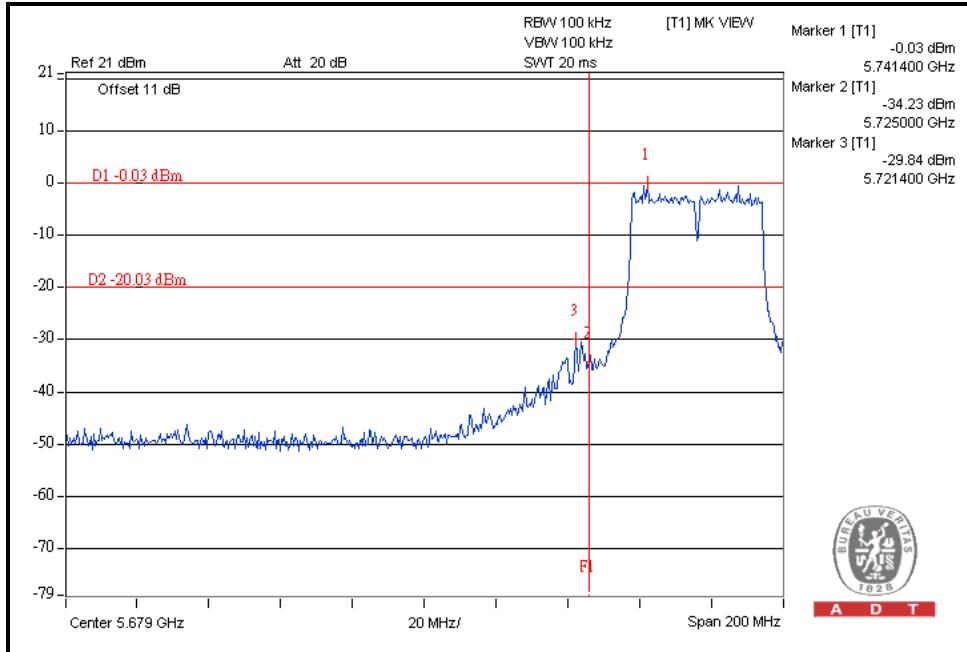



A D T

For Chain(1) : CH159

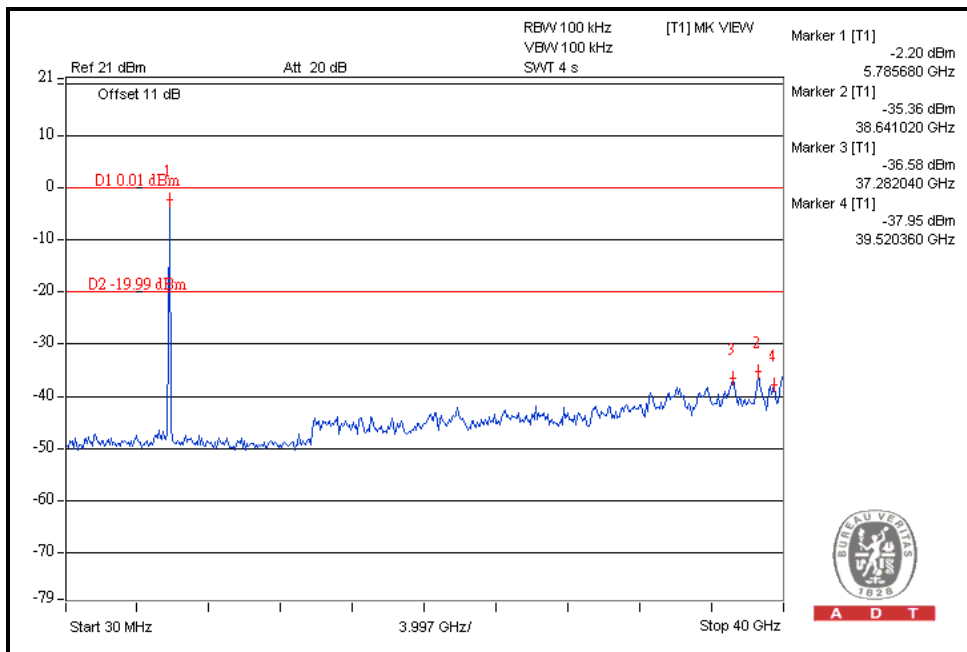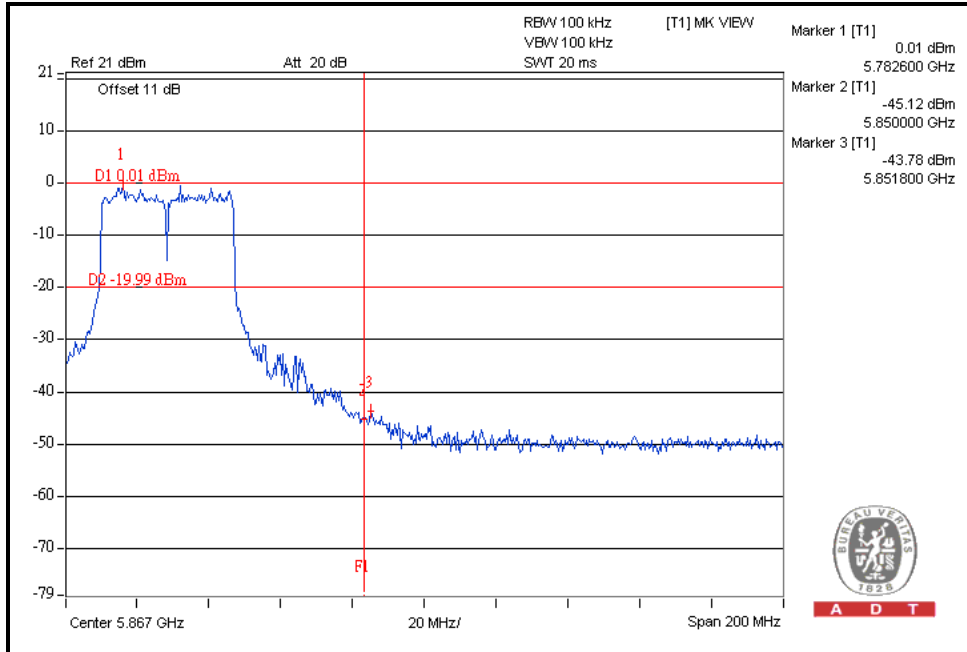



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---