


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	62%
Test Engineer	David Tseng	Configurations	2.4G + 5G
Test Mode	Mode 1		

Horizontal

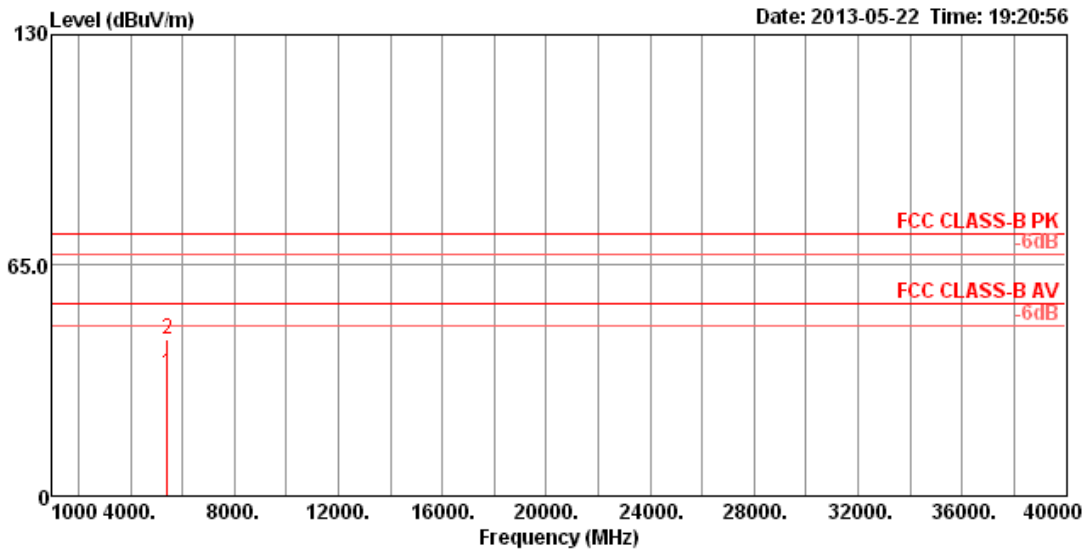

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 pp	5422.80	34.45	54.00	-19.55	30.15	6.16	33.65	35.51	100	295	HORIZONTAL Average
2 pk	5422.84	44.13	74.00	-29.87	39.83	6.16	33.65	35.51	100	295	HORIZONTAL Peak

Vertical

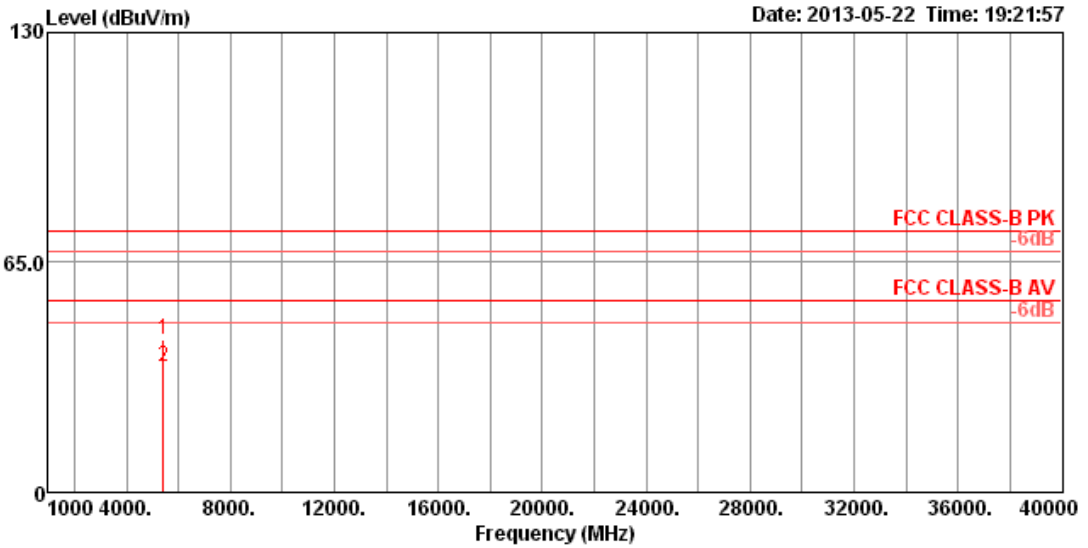

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	pk	5422.80	43.37	74.00	-30.63	39.07	6.16	33.65	35.51	100	102 VERTICAL	Peak
2	pp	5423.55	35.74	54.00	-18.26	31.44	6.16	33.65	35.51	100	102 VERTICAL	Average