



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2AP3662A1

Product Name	Wireless AC1200 Dual Band Outdoor PoE Access Point
Brand Name	D-Link
Model No.	DAP-3662
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Oct. 22, 2014
Final Test Date	Dec. 08, 2014
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	11
3.11. Test Configurations	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	21
4.3. Maximum Conducted Output Power Measurement.....	33
4.4. Power Spectral Density Measurement	37
4.5. Radiated Emissions Measurement	43
4.6. Band Edge Emissions Measurement	59
4.7. Frequency Stability Measurement	64
4.8. Antenna Requirements	66
5. LIST OF MEASURING EQUIPMENTS	67
6. MEASUREMENT UNCERTAINTY.....	69
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3
APPENDIX D. MAXIMUM E.I.R.P. AT ANY ELEVATION ANGLE ABOVE 30 DEGREES	D1 ~ D2

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N2206AB	Rev. 01	Initial issue of report	Jan. 26, 2015

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless AC1200 Dual Band Outdoor PoE Access Point
Brand Name : D-Link
Model No. : DAP-3662
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 22, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.77 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	5.25 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.22 dB
4.5	15.407(b)	Radiated Emissions	Complies	0.82 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.26 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter and PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (VHT20): 18.54 MHz ; 802.11ac MCS0/Nss1 (VHT40): 38.04 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.56 MHz
Maximum Conducted Output Power	802.11ac MCS0/Nss1 (VHT20): 24.55 dBm ; 802.11ac MCS0/Nss1 (VHT40): 24.24 dBm ; 802.11ac MCS0/Nss1 (VHT80): 21.20 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter and PoE
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	17.16 MHz
Maximum Conducted Output Power	24.40 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	☒ IP Based (Load Based) ☐ Frame Based
Beamforming Function	☐ With beamforming ☒ Without beamforming
Operating Mode	☒ Outdoor access point ☐ Indoor access point ☐ Fixed point-to-point access points ☐ Mobile and portable client devices

Antenna and Band width

Antenna	Two (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter	LEI	MU24-B480050-A1	Input: 100-240VAC, 50/60Hz 1.0A Output: 48VDC, 0.5A
PoE	LanReady	PE03G	Input: 8-57VDC (Max. 48W) Output: 8-57VDC (Max. 48W)
Others			
Ground Cable*1, Non-shielded, 0.2m			

3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Grand-Tek	OA-58-06-03	Embedded Antenna	I-PEX	-	6.2
2	Grand-Tek	OA-58-05-02	Embedded Antenna	I-PEX	-	6.2
3	Grand-Tek	OA-24-05-06	Embedded Antenna	I-PEX	6.1	-
4	Grand-Tek	OA-24-04-02	Embedded Antenna	I-PEX	4.8	-


Note: The EUT has four antennas.

For IEEE 802.11a/n/ac mode:

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For IEEE 802.11b/g/n mode:

Ant. 3 and Ant. 4 could transmit/receive simultaneously.

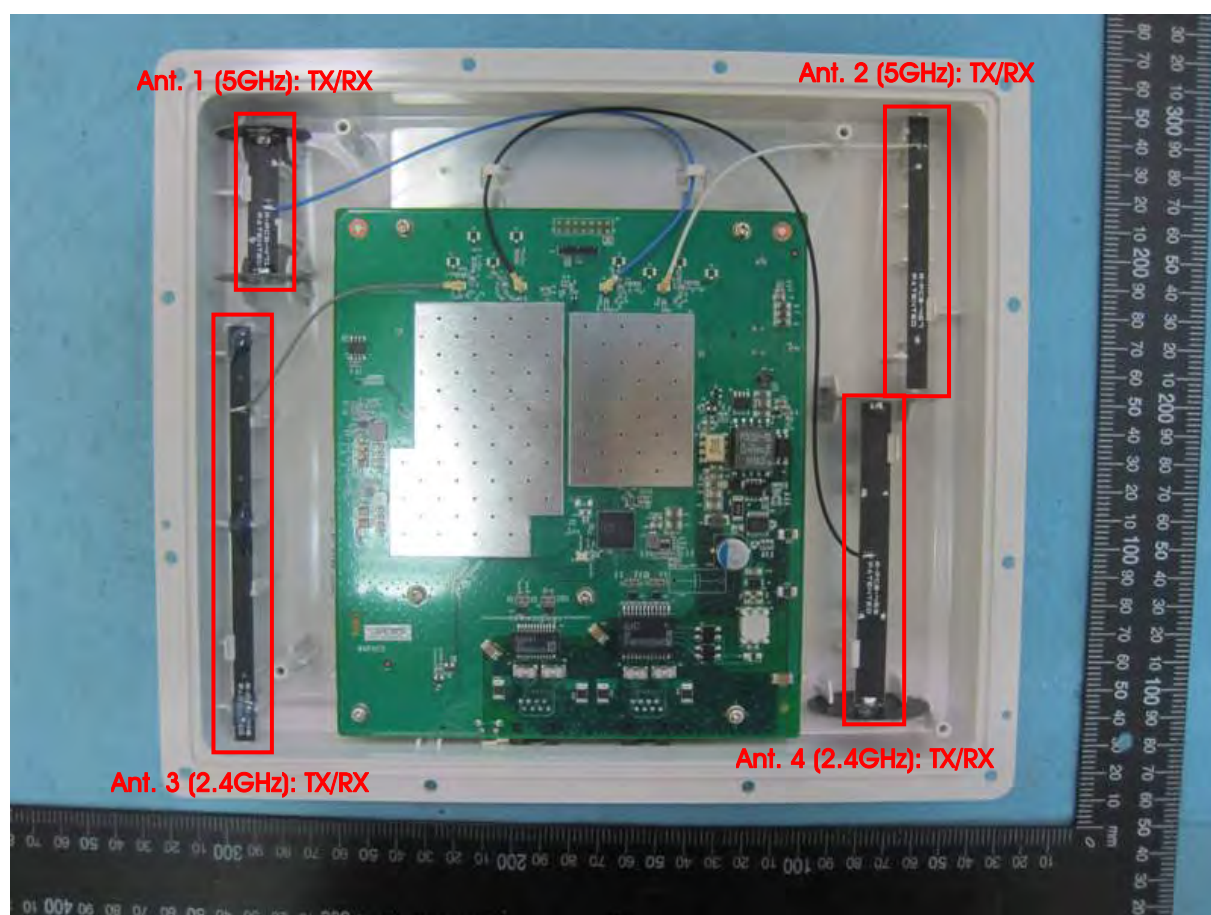

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1 + 2
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1 + 2
	11ac VHT80	Band 1	MCS0/Nss1	42	1 + 2
	11a/BPSK	Band 1	6Mbps	36/40/48	1 + 2
Power Spectral Density	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1 + 2
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1 + 2
	11ac VHT80	Band 1	MCS0/Nss1	42	1 + 2
	11a/BPSK	Band 1	6Mbps	36/40/48	1 + 2
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1 + 2
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1 + 2
	11ac VHT80	Band 1	MCS0/Nss1	42	1 + 2
	11a/BPSK	Band 1	6Mbps	36/40/48	1 + 2
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1 + 2
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1 + 2
	11ac VHT80	Band 1	MCS0/Nss1	42	1 + 2
	11a/BPSK	Band 1	6Mbps	36/40/48	1 + 2
Band Edge Emission	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1 + 2
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1 + 2
	11ac VHT80	Band 1	MCS0/Nss1	42	1 + 2
	11a/BPSK	Band 1	6Mbps	36/40/48	1 + 2
Frequency Stability	Un-modulation		-	40	1 + 2

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

The following test modes were performed for all tests:

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	DoC
Notebook	DELL	M1340	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	D420	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
LCD Monitor	DELL	E1913C	DoC
Printer	EPSON	LQ-300+	DoC
Modem	ACEEX	DM1414	N/A
PC	DELL	T3400	IFAXDM1414
Mouse	HP	FM100	DoC
Keyboard	iCooky	SK068	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 VHT20	20	20	20.5

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 VHT40	19.5	21.5

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS
Frequency	5210 MHz
MCS0/Nss1 VHT80	18.5

Power Parameters of IEEE 802.11a

Test Software Version	DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
802.11a	20	20	20

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.891	1.952	96.88	0.14	0.53
802.11ac MCS0/Nss1 VHT40	0.899	0.951	94.53	0.24	1.11
802.11ac MCS0/Nss1 VHT80	0.446	0.503	88.67	0.52	2.24
802.11a	2.021	2.086	96.88	0.14	0.49

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

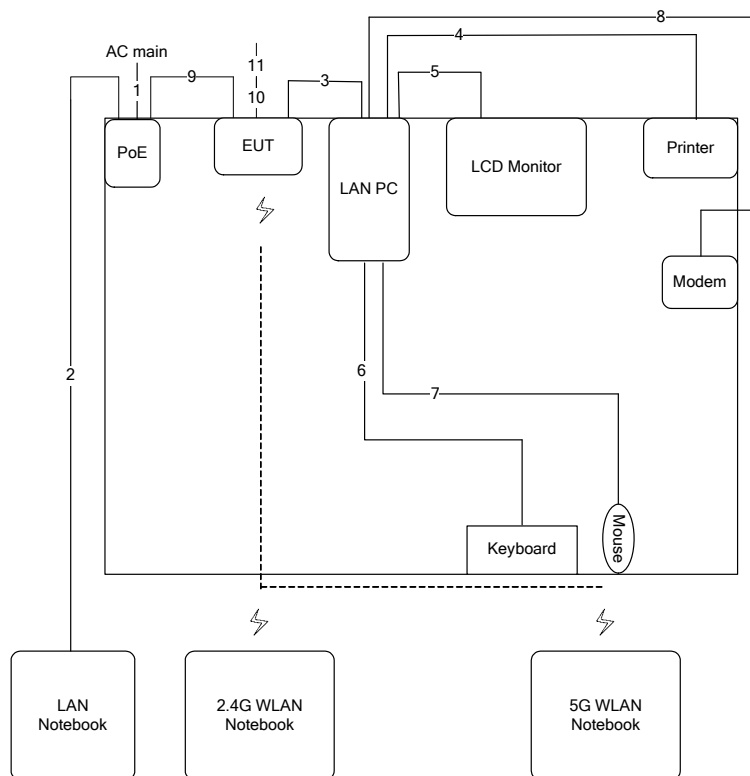

Item	Connection	Shield	Length (m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	3m
4	USB cable	Yes	1.8m
5	VGA cable	Yes	1.8m
6	USB cable	Yes	1.8m
7	USB cable	Yes	1.8m
8	RS-232 cable	Yes	1.8m
9	RJ-45 cable	No	3m
10	Ground cable	No	0.2m
11	Ground cable	No	1.5m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

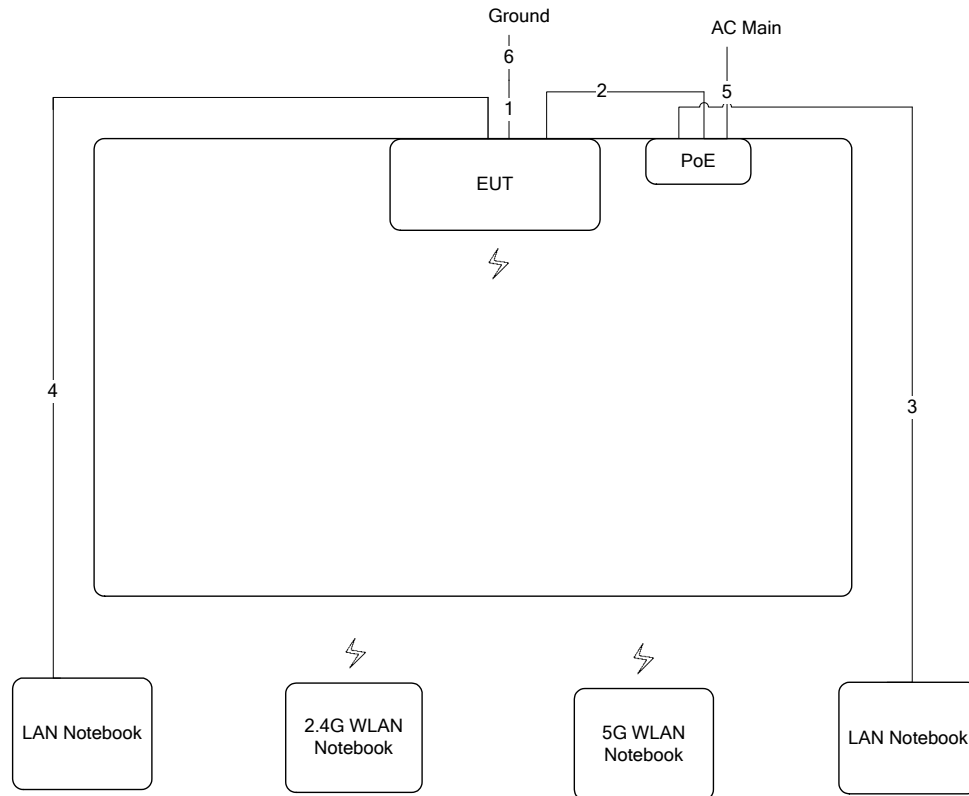

Item	Connection	Shielded	Length (m)
1	Ground cable	No	0.2m
2	RJ-45 cable	No	1m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	Power cable	No	1.5m
6	Ground cable	No	1.5m

Test Configuration: above 1GHz

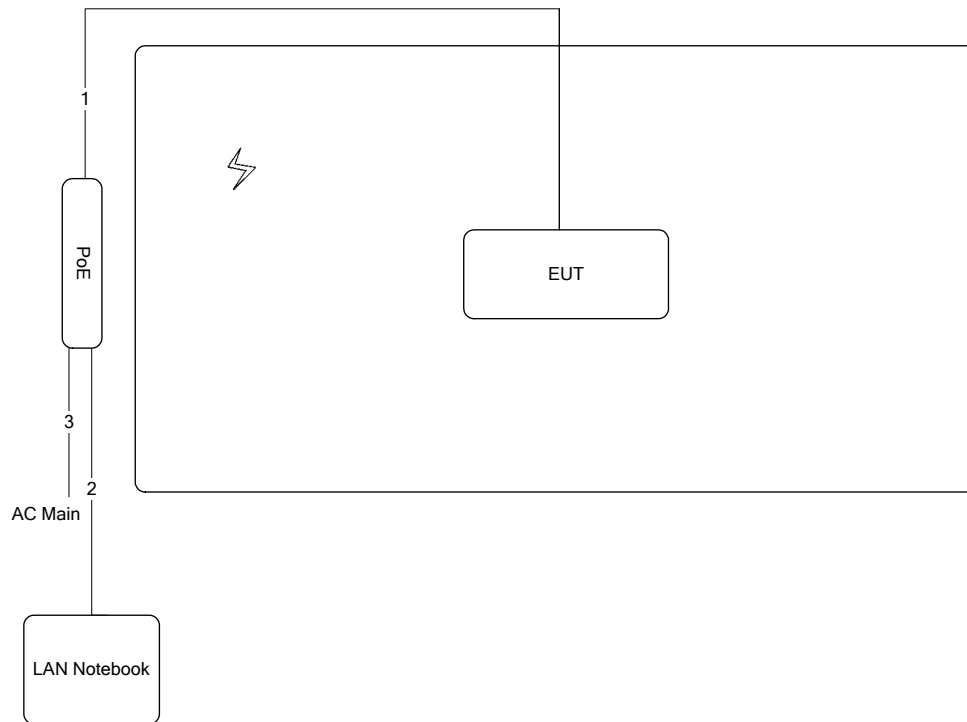

Item	Connection	Shielded	Length (m)
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1m
3	Power cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

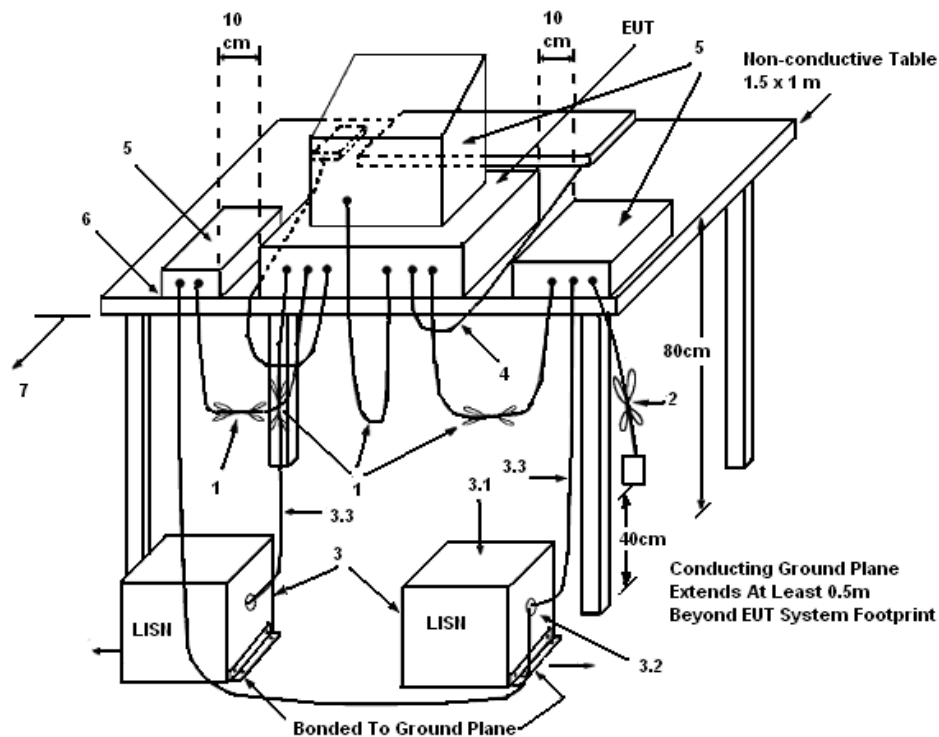

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	24°C	Humidity	56%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link		

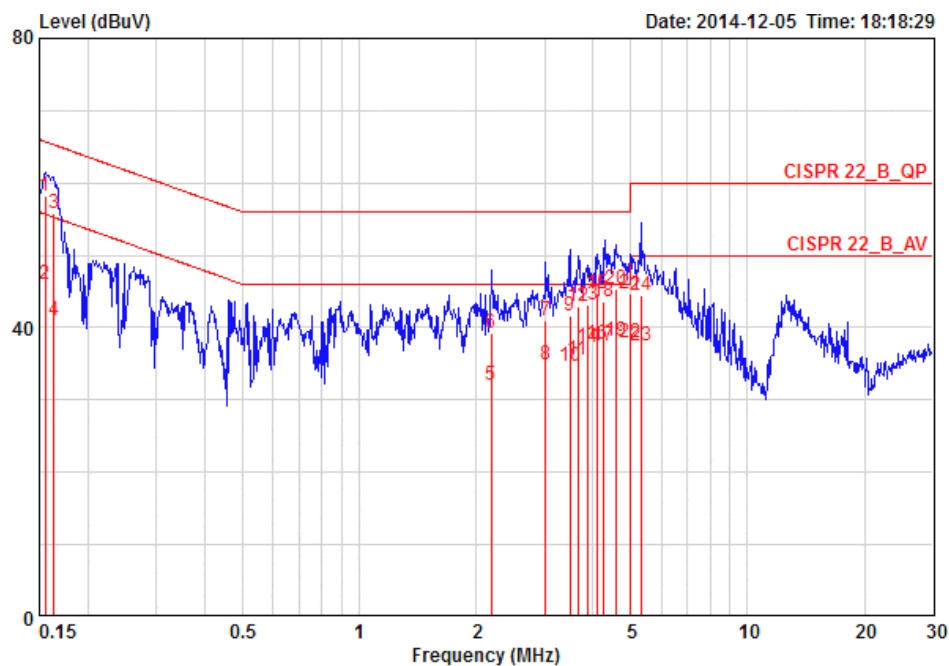

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15567	58.26	-7.43	65.69	48.14	9.96	0.16	QP	LINE
2	0.15567	46.00	-9.69	55.69	35.88	9.96	0.16	AVERAGE	LINE
3	0.16327	55.76	-9.54	65.30	45.64	9.96	0.16	QP	LINE
4	0.16327	41.06	-14.24	55.30	30.94	9.96	0.16	AVERAGE	LINE
5	2.190	31.97	-14.03	46.00	21.68	10.04	0.26	AVERAGE	LINE
6	2.190	39.30	-16.70	56.00	29.01	10.04	0.26	QP	LINE
7	3.025	41.07	-14.93	56.00	30.74	10.05	0.28	QP	LINE
8	3.025	34.84	-11.16	46.00	24.51	10.05	0.28	AVERAGE	LINE
9	3.491	41.71	-14.29	56.00	31.36	10.06	0.29	QP	LINE
10	3.491	34.67	-11.33	46.00	24.32	10.06	0.29	AVERAGE	LINE
11	3.661	35.62	-10.38	46.00	25.26	10.06	0.29	AVERAGE	LINE
12	3.661	42.93	-13.07	56.00	32.57	10.06	0.29	QP	LINE
13	3.881	43.23	-12.77	56.00	32.86	10.07	0.30	QP	LINE
14	3.881	37.27	-8.73	46.00	26.90	10.07	0.30	AVERAGE	LINE
15	4.092	44.78	-11.22	56.00	34.41	10.07	0.30	QP	LINE
16	4.092	37.62	-8.38	46.00	27.25	10.07	0.30	AVERAGE	LINE
17	4.269	37.56	-8.44	46.00	27.17	10.08	0.31	AVERAGE	LINE
18	4.269	43.60	-12.40	56.00	33.21	10.08	0.31	QP	LINE
19	4.574	38.14	-7.86	46.00	27.74	10.09	0.31	AVERAGE	LINE
20	4.574	45.36	-10.64	56.00	34.96	10.09	0.31	QP	LINE
21	5.005	44.62	-15.38	60.00	34.19	10.11	0.32	QP	LINE
22	5.005	37.91	-12.09	50.00	27.48	10.11	0.32	AVERAGE	LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
23	5.305	37.49	-12.51	50.00	27.05	10.12	0.33	AVERAGE	LINE
24	5.305	44.43	-15.57	60.00	33.99	10.12	0.33	QP	LINE

Temperature	24°C	Humidity	56%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link		

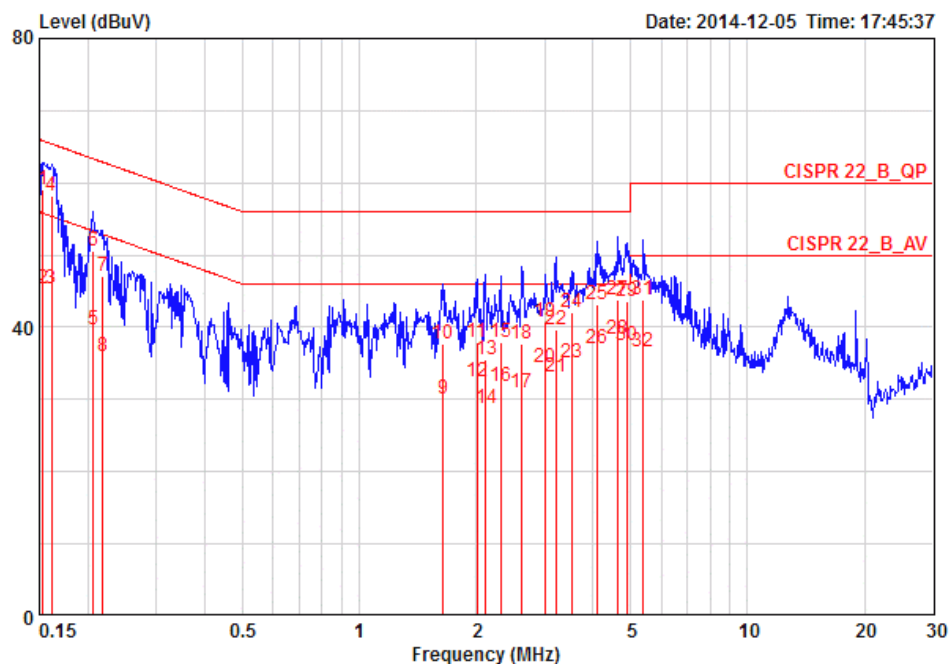

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
			dB	dBuV	dBuV	dB	dB		
1 @	0.15321	59.05	-6.77	65.82	48.94	9.95	0.16	QP	NEUTRAL
2	0.15321	45.27	-10.55	55.82	35.16	9.95	0.16	AVERAGE	NEUTRAL
3	0.16155	45.34	-10.04	55.38	35.23	9.95	0.16	AVERAGE	NEUTRAL
4 @	0.16155	58.14	-7.24	65.38	48.03	9.95	0.16	QP	NEUTRAL
5	0.20614	39.60	-13.76	53.36	29.48	9.95	0.17	AVERAGE	NEUTRAL
6	0.20614	50.48	-12.88	63.36	40.36	9.95	0.17	QP	NEUTRAL
7	0.21851	47.00	-15.88	62.88	36.88	9.95	0.17	QP	NEUTRAL
8	0.21851	36.04	-16.84	52.88	25.92	9.95	0.17	AVERAGE	NEUTRAL
9	1.645	30.19	-15.81	46.00	19.95	10.00	0.24	AVERAGE	NEUTRAL
10	1.645	37.62	-18.38	56.00	27.38	10.00	0.24	QP	NEUTRAL
11	2.012	38.02	-17.98	56.00	27.76	10.01	0.25	QP	NEUTRAL
12	2.012	32.48	-13.52	46.00	22.22	10.01	0.25	AVERAGE	NEUTRAL
13	2.121	35.57	-20.43	56.00	25.30	10.01	0.25	QP	NEUTRAL
14	2.121	28.74	-17.26	46.00	18.47	10.01	0.25	AVERAGE	NEUTRAL
15	2.309	37.90	-18.10	56.00	27.62	10.02	0.26	QP	NEUTRAL
16	2.309	31.82	-14.18	46.00	21.54	10.02	0.26	AVERAGE	NEUTRAL
17	2.622	31.05	-14.95	46.00	20.75	10.03	0.27	AVERAGE	NEUTRAL
18	2.622	37.69	-18.31	56.00	27.39	10.03	0.27	QP	NEUTRAL
19	3.025	40.71	-15.29	56.00	30.40	10.03	0.28	QP	NEUTRAL
20	3.025	34.46	-11.54	46.00	24.15	10.03	0.28	AVERAGE	NEUTRAL
21	3.207	33.22	-12.78	46.00	22.90	10.04	0.28	AVERAGE	NEUTRAL
22	3.207	39.63	-16.37	56.00	29.31	10.04	0.28	QP	NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
23	3.528	35.03	-10.97	46.00	24.70	10.04	0.29	AVERAGE	NEUTRAL
24	3.528	42.06	-13.94	56.00	31.73	10.04	0.29	QP	NEUTRAL
25	4.092	43.17	-12.83	56.00	32.82	10.05	0.30	QP	NEUTRAL
26	4.092	37.08	-8.92	46.00	26.73	10.05	0.30	AVERAGE	NEUTRAL
27	4.647	43.86	-12.14	56.00	33.47	10.07	0.31	QP	NEUTRAL
28	4.647	38.30	-7.70	46.00	27.91	10.07	0.31	AVERAGE	NEUTRAL
29	4.874	43.68	-12.32	56.00	33.28	10.08	0.32	QP	NEUTRAL
30	4.874	37.47	-8.53	46.00	27.07	10.08	0.32	AVERAGE	NEUTRAL
31	5.390	43.81	-16.19	60.00	33.39	10.10	0.33	QP	NEUTRAL
32	5.390	36.59	-13.41	50.00	26.17	10.10	0.33	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	22°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.04	18.36
40	5200 MHz	23.48	18.54
48	5240 MHz	23.68	18.48

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	45.44	37.80
46	5230 MHz	47.04	38.04

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	85.76	76.56

Temperature	22°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1 + Ant. 2


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.96	17.10
40	5200 MHz	24.48	17.16
48	5240 MHz	22.72	17.16

26dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5180 MHz

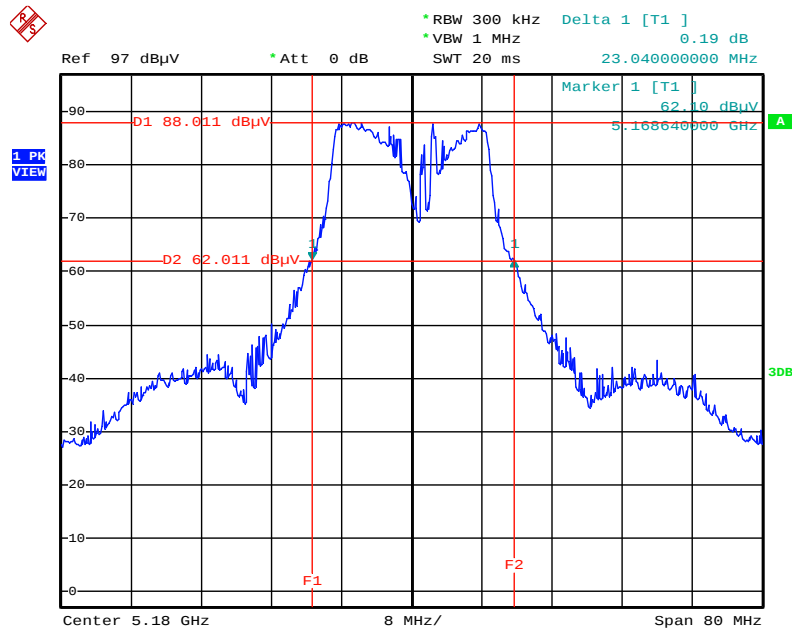


Date: 21.NOV.2014 00:04:35

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5180 MHz

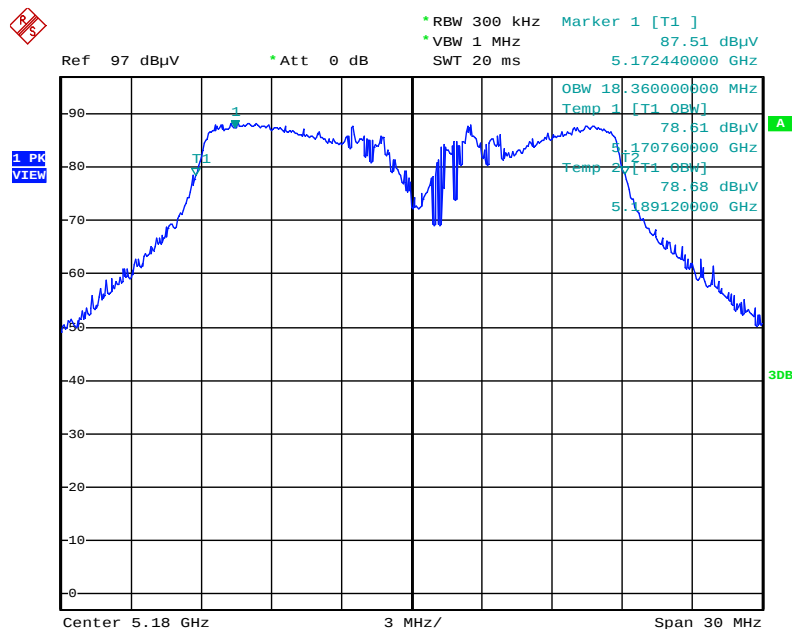


Date: 20.NOV.2014 23:27:53

26dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5200 MHz

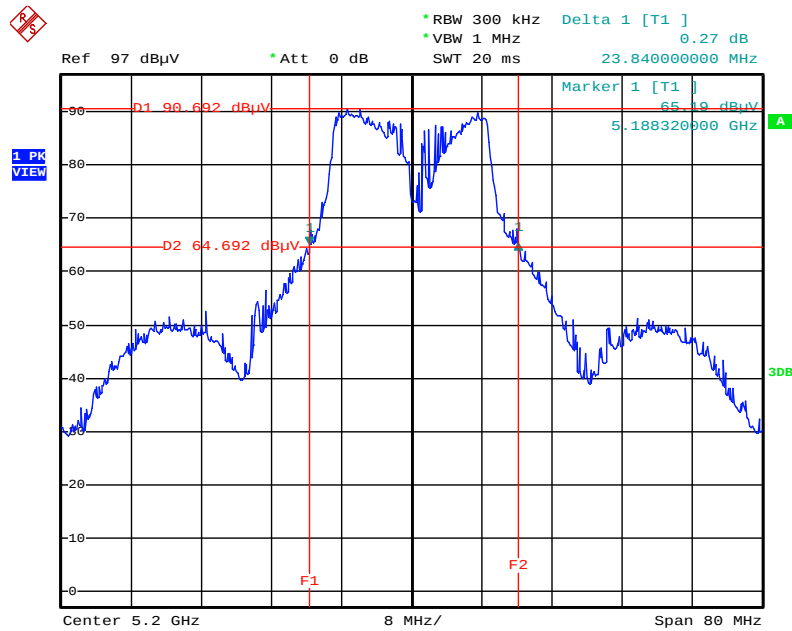


Date: 21.NOV.2014 00:04:05

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5200 MHz

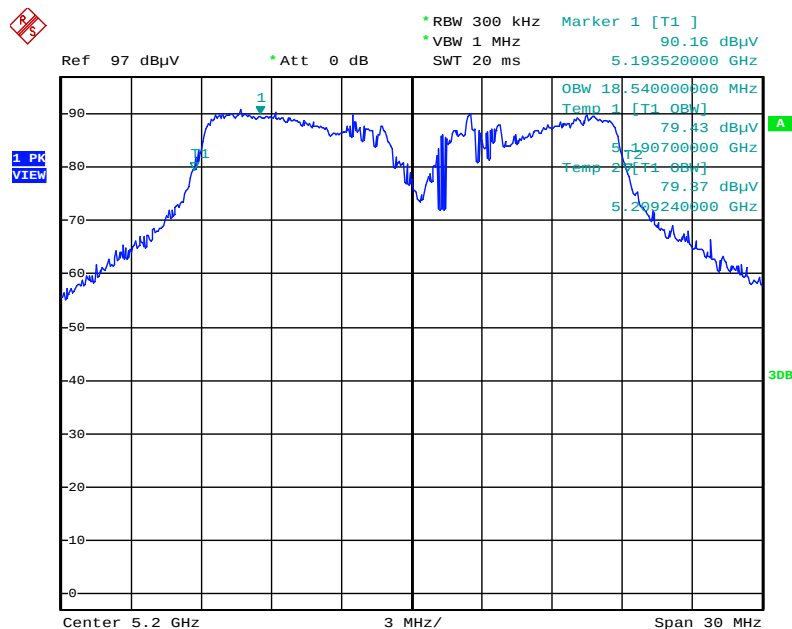


Date: 20.NOV.2014 23:28:33

26dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5240 MHz

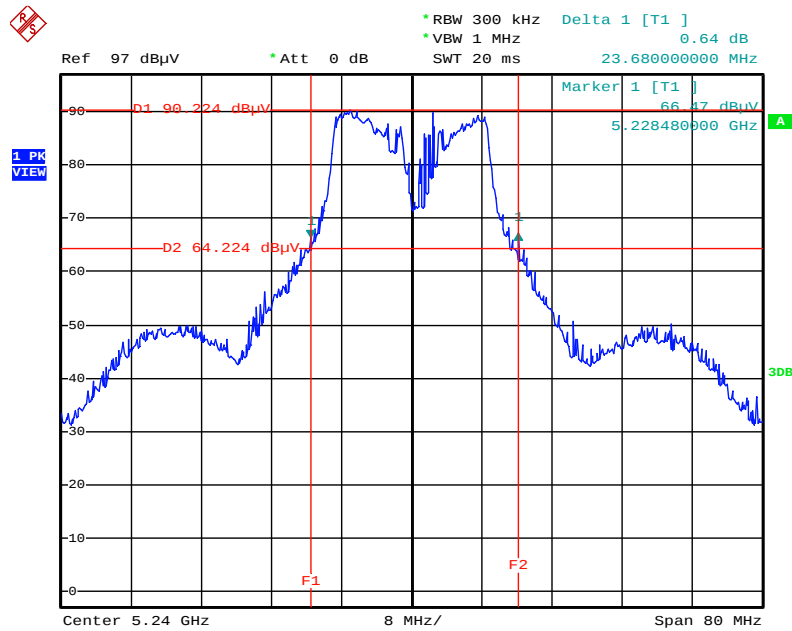


Date: 21.NOV.2014 00:03:32

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5240 MHz

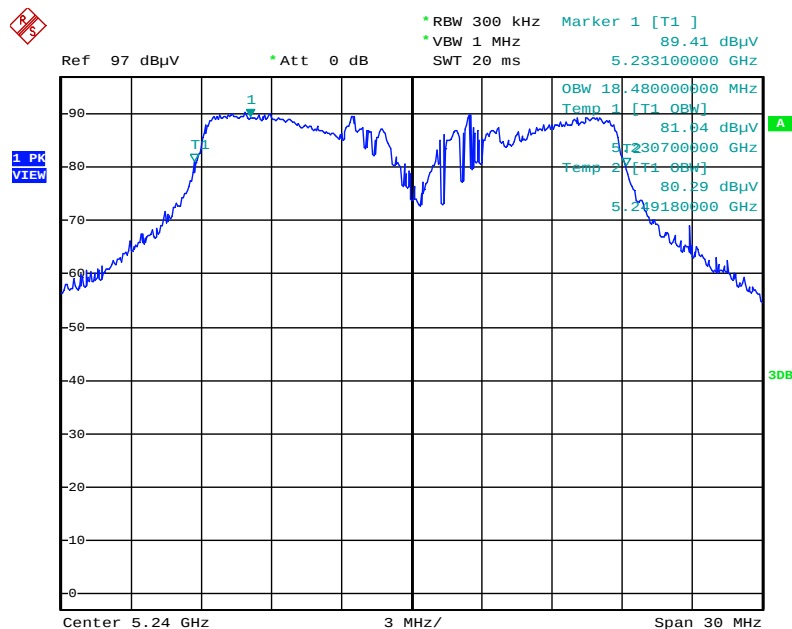


Date: 20.NOV.2014 23:29:08

26dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5190 MHz

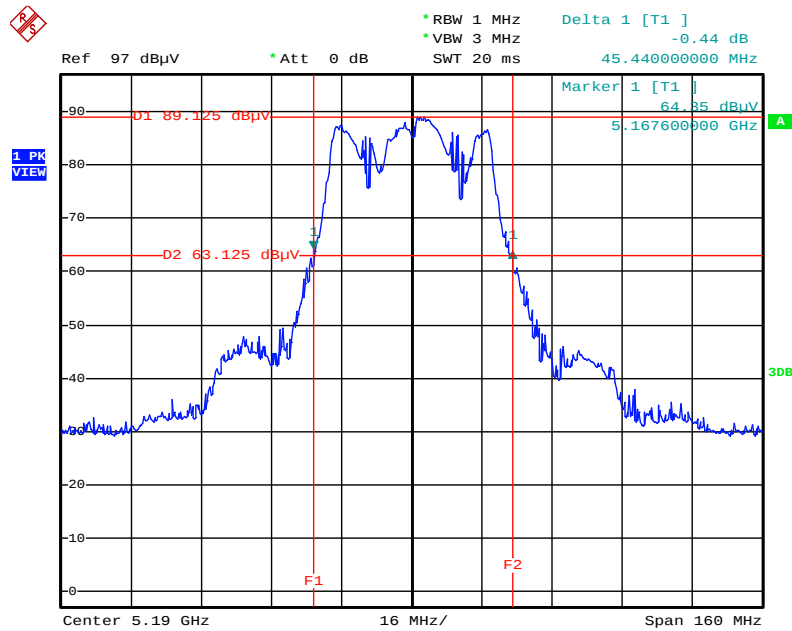


Date: 21.NOV.2014 00:05:36

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5190 MHz

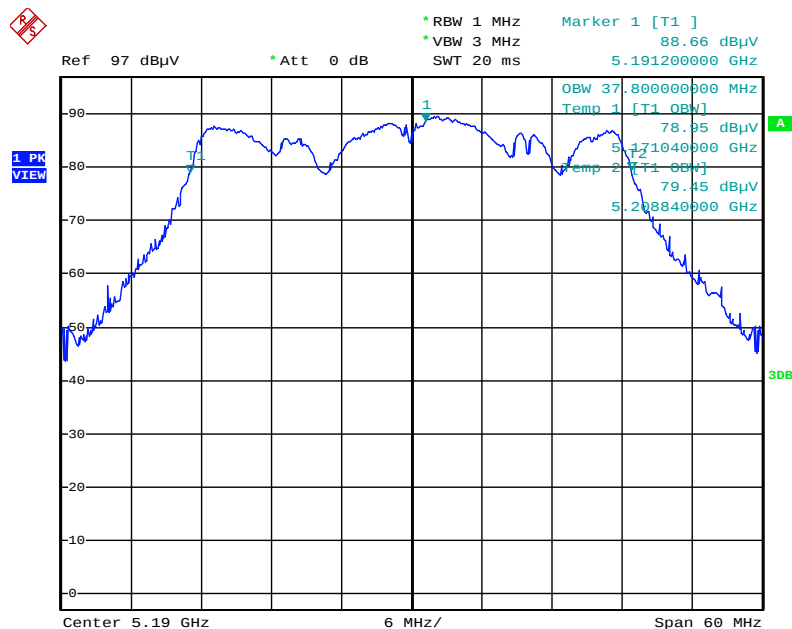


Date: 20.NOV.2014 23:17:27

26dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5230 MHz

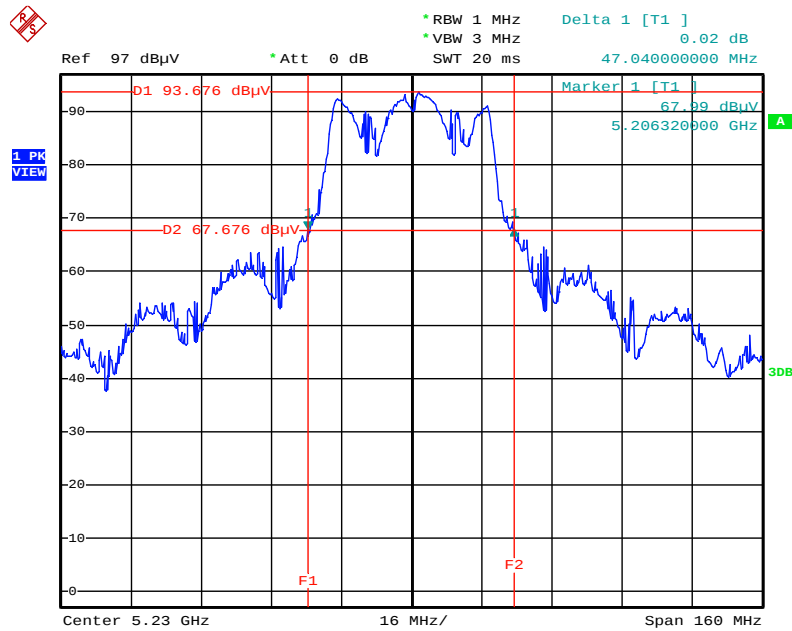


Date: 21.NOV.2014 00:07:31

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5230 MHz

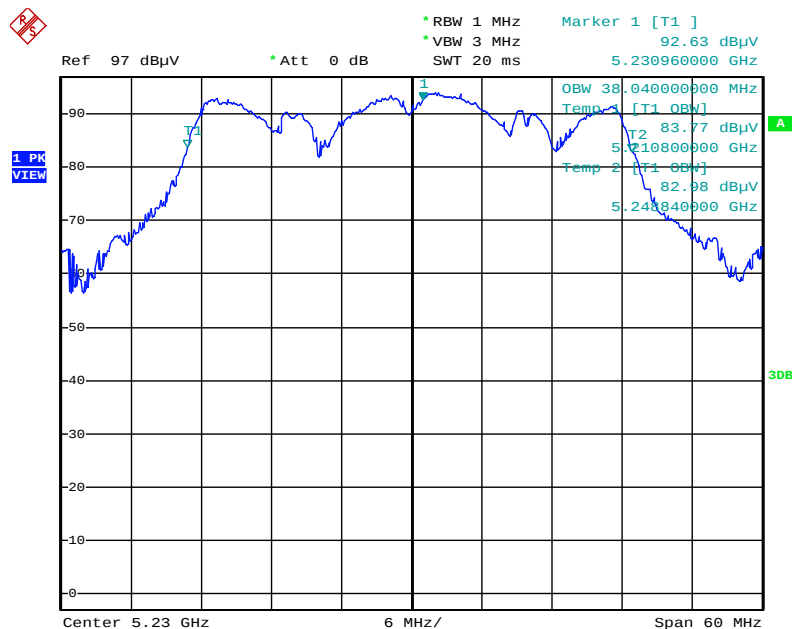


Date: 20.NOV.2014 23:18:21

26dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5210 MHz

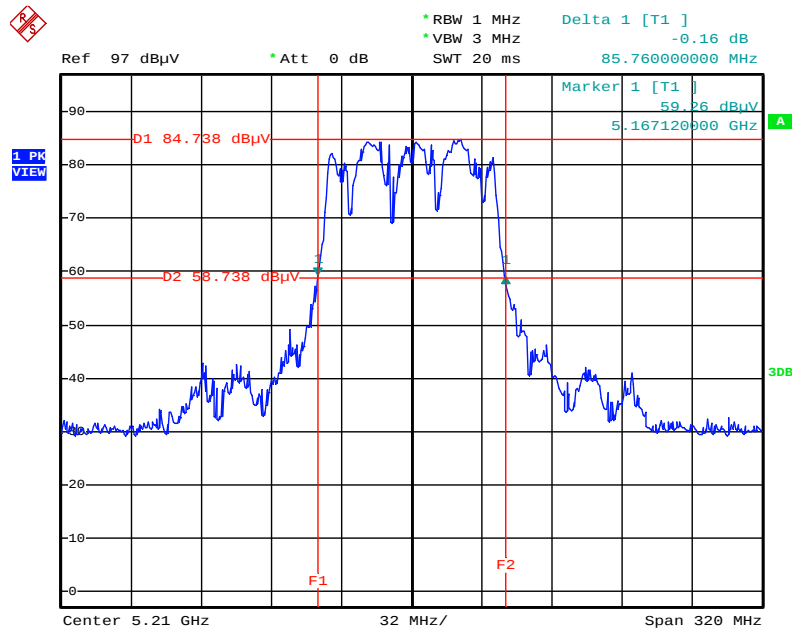


Date: 21.NOV.2014 00:20:27

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5210 MHz

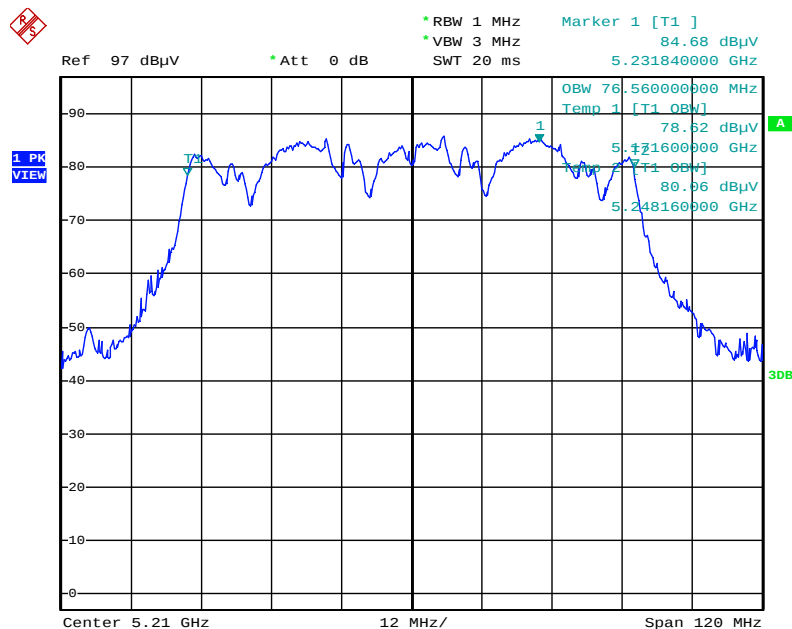


Date: 20.NOV.2014 22:01:31

26dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5180 MHz

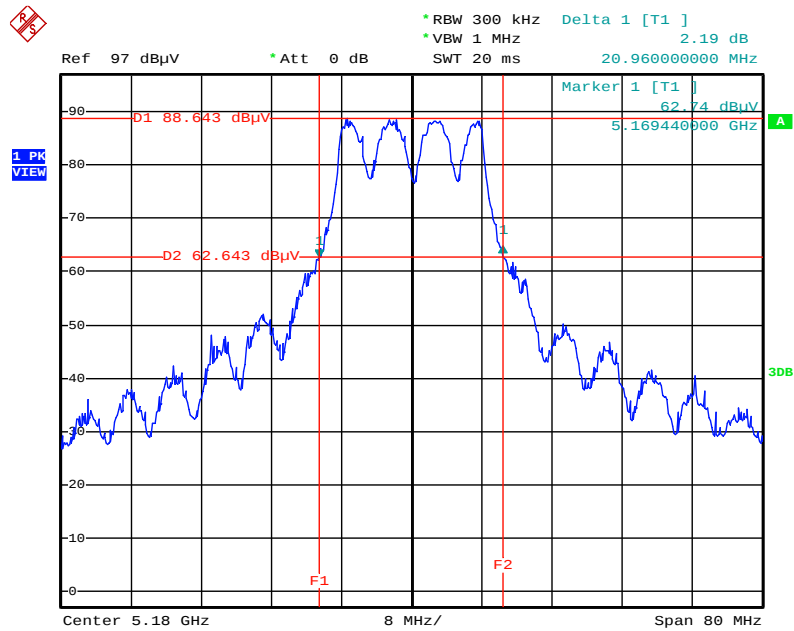


Date: 20.NOV.2014 23:50:32

99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5180 MHz

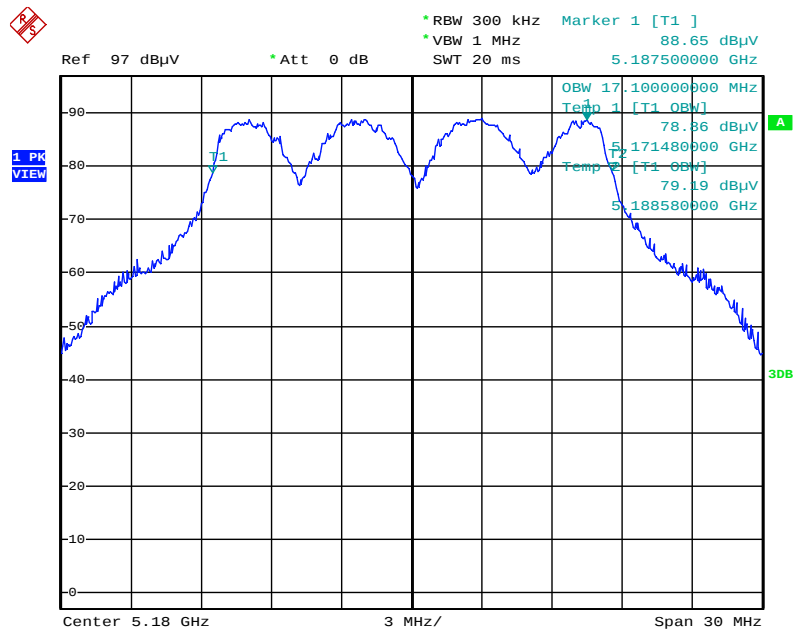


Date: 20.NOV.2014 23:40:23

26dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5200 MHz

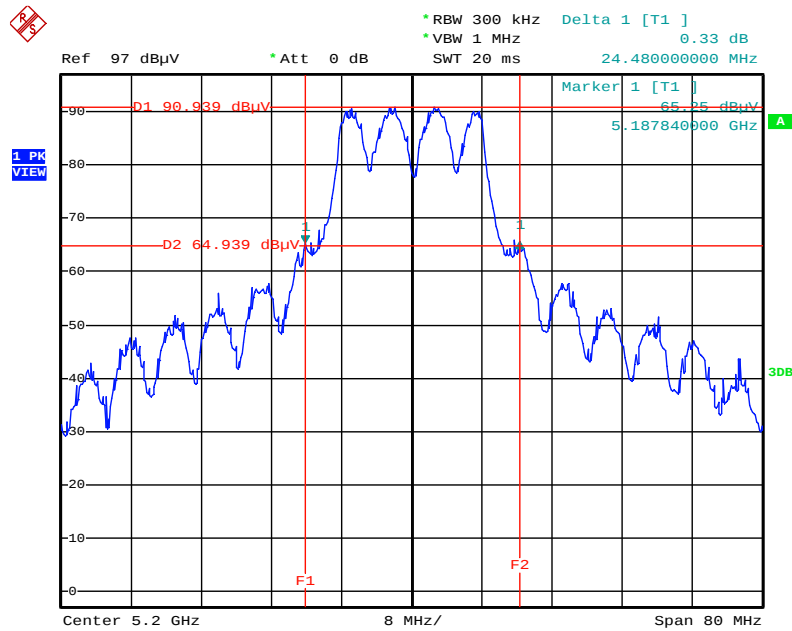


Date: 20.NOV.2014 23:51:17

99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5200 MHz

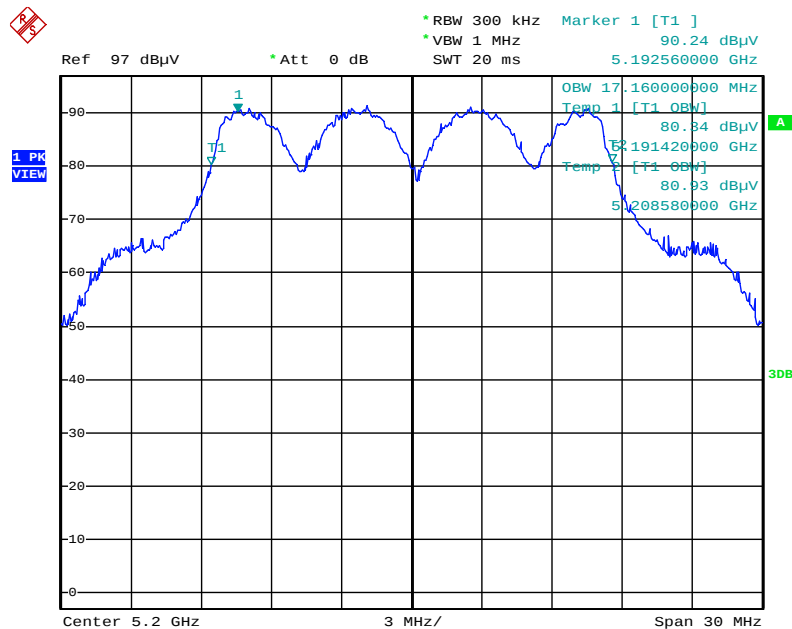


Date: 20.NOV.2014 23:39:49

26dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5240 MHz

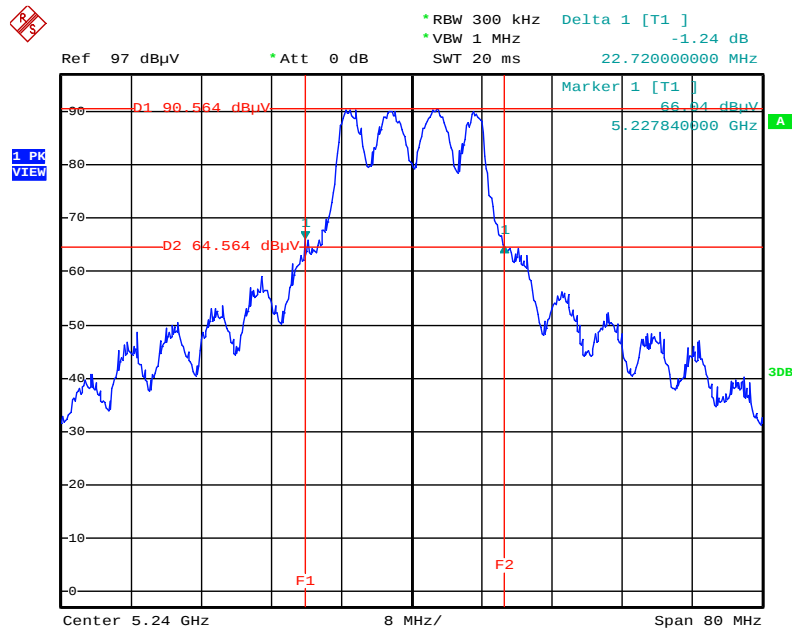

Date: 20.NOV.2014 23:51:53

99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5240 MHz

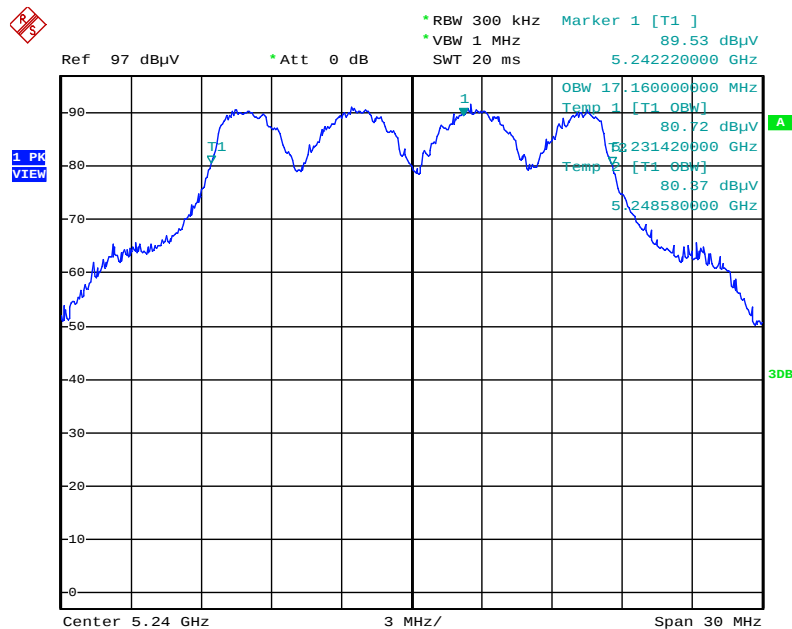

Date: 20.NOV.2014 23:39:19

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
☒	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
☐	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
☐	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
☐	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems,add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	22°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Nov. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
36	5180 MHz	21.03	20.98	24.02	29.80	Complies
40	5200 MHz	21.45	21.20	24.34	29.80	Complies
48	5240 MHz	21.72	21.35	24.55	29.80	Complies

Note: Max Ant. Gain = 6.2dBi > 6dBi, so limit = 30- (6.2 - 6) = 29.8dBm.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
38	5190 MHz	19.54	19.87	22.72	29.80	Complies
46	5230 MHz	21.12	21.34	24.24	29.80	Complies

Note: Max Ant. Gain = 6.2dBi > 6dBi, so limit = 30- (6.2 - 6) = 29.8dBm.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
42	5210 MHz	17.92	18.45	21.20	29.80	Complies

Note: Max Ant. Gain = 6.2dBi > 6dBi, so limit = 30- (6.2 - 6) = 29.8dBm.

Temperature	22°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Nov. 20, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
36	5180 MHz	21.32	20.93	24.14	29.80	Complies
40	5200 MHz	21.16	21.60	24.40	29.80	Complies
48	5240 MHz	21.07	21.18	24.14	29.80	Complies

Note: Max Ant. Gain = 6.2dBi > 6dBi, so limit = 30- (6.2 - 6) = 29.8dBm.

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
☒	Outdoor access point	17 dBm/MHz
☐	Indoor access point	17 dBm/MHz
☐	Fixed point-to-point access points	17 dBm/MHz
☐	Mobile and portable client devices	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

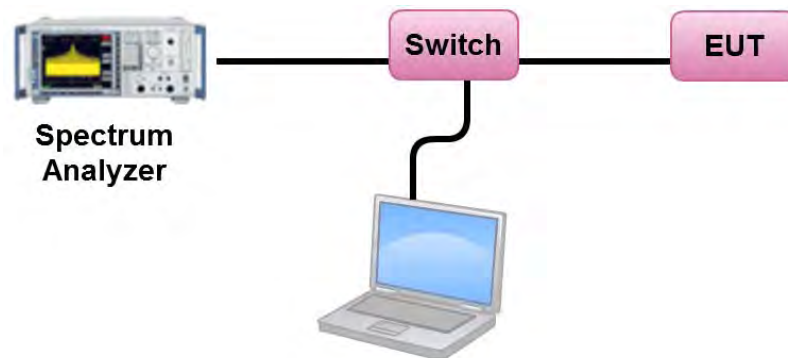

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	22°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Nov. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	11.70	13.79	Complies
40	5200 MHz	13.41	13.79	Complies
48	5240 MHz	13.43	13.79	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{i=1}^{N_{MCS}} g_{j,i} \right\}^2}{N_{ANT}} \right] = 9.21 \text{ dBi} > 6 \text{ dBi}$, so limit = 17 - (9.21 - 6) = 13.79dBm/MHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	5.64	13.79	Complies
46	5230 MHz	10.54	13.79	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{i=1}^{N_{MCS}} g_{j,i} \right\}^2}{N_{ANT}} \right] = 9.21 \text{ dBi} > 6 \text{ dBi}$, so limit = 17 - (9.21 - 6) = 13.79dBm/MHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	1.20	13.79	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{i=1}^{N_{MCS}} g_{j,i} \right\}^2}{N_{ANT}} \right] = 9.21 \text{ dBi} > 6 \text{ dBi}$, so limit = 17 - (9.21 - 6) = 13.79dBm/MHz.

Temperature	22°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Nov. 20, 2014		

Configuration IEEE 802.11a / Ant. 1 + Ant. 2


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	11.71	13.79	Complies
40	5200 MHz	13.46	13.79	Complies
48	5240 MHz	13.57	13.79	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{i=1}^{N_{MAX}} g_{j,i} \right\}^2}{N_{ANT}} \right] = 9.21 \text{ dBi} > 6 \text{ dBi}$, so limit = 17 - (9.21 - 6) = 13.79dBm/MHz.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5240 MHz

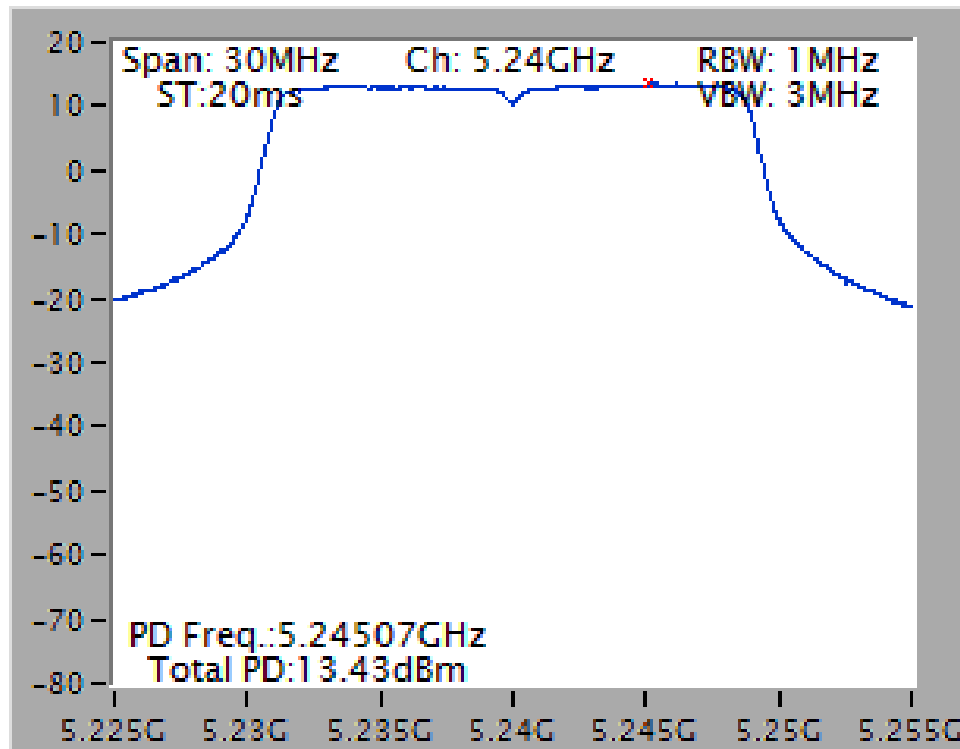


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5230 MHz

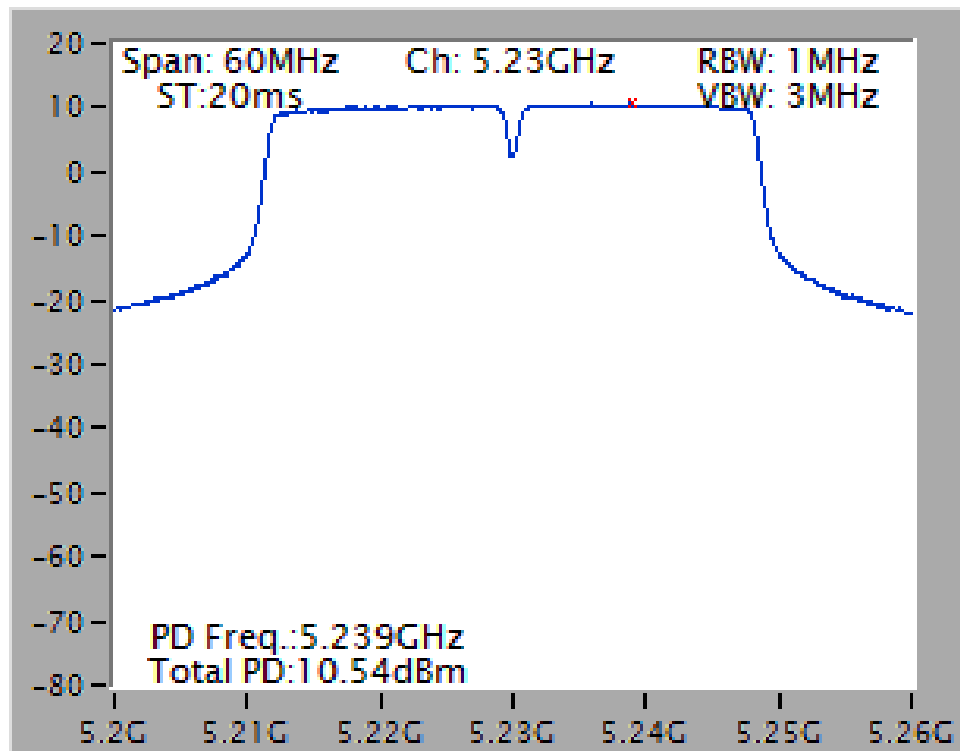

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5210 MHz

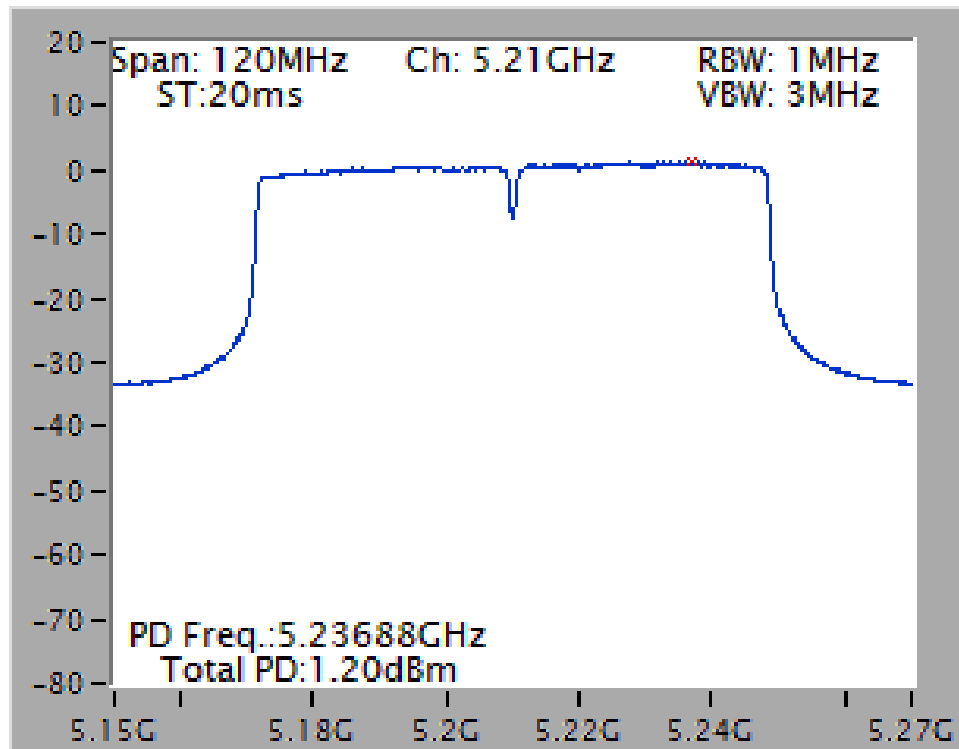

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5240 MHz

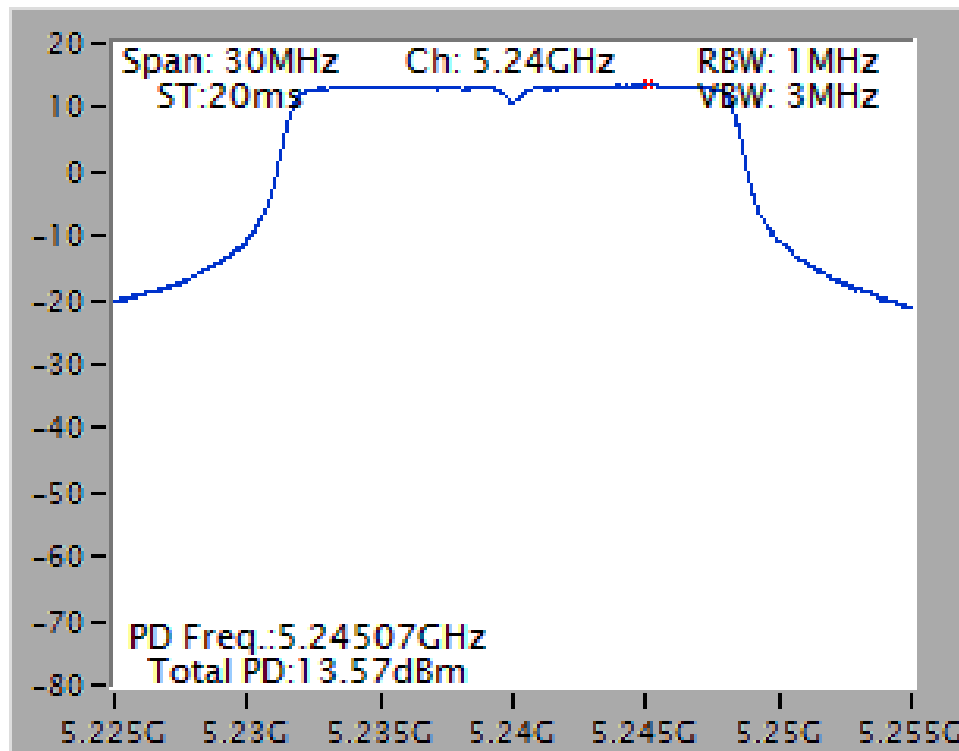

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

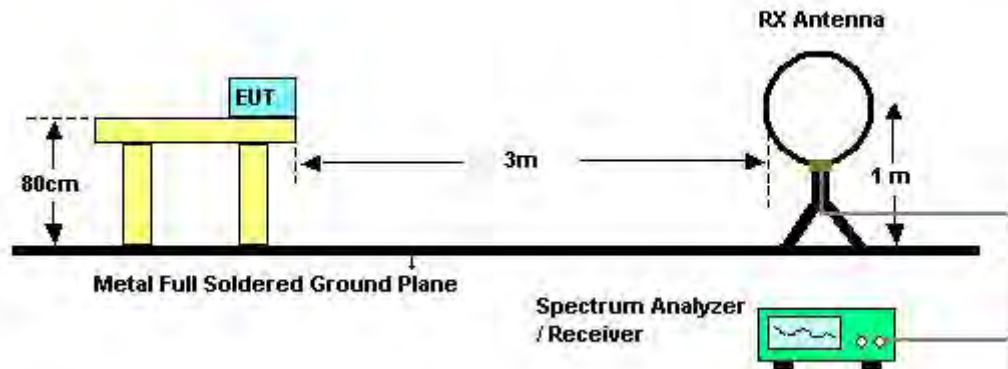

For Radiated Emissions: 30MHz~1GHz

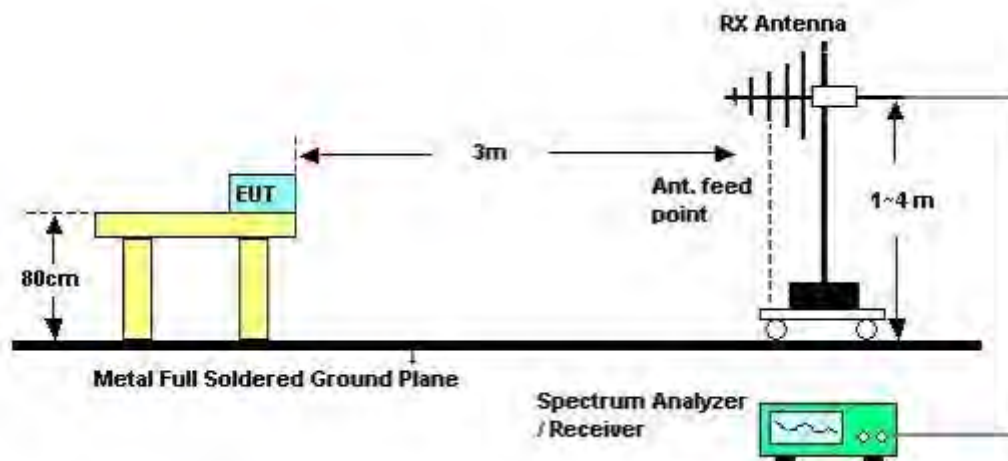

For Radiated Emissions: Above 1GHz

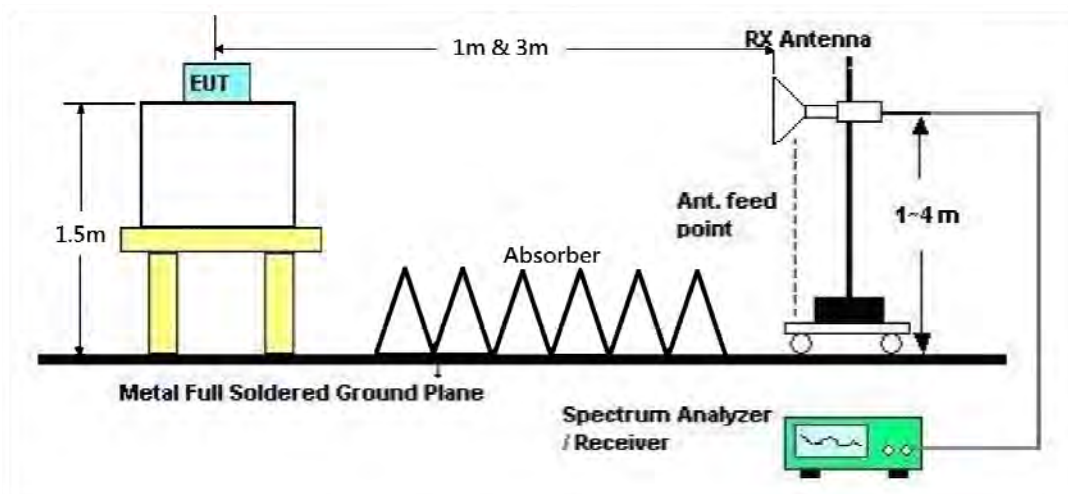

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	Normal Link
Test Date	Dec. 08, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	Normal Link

Horizontal

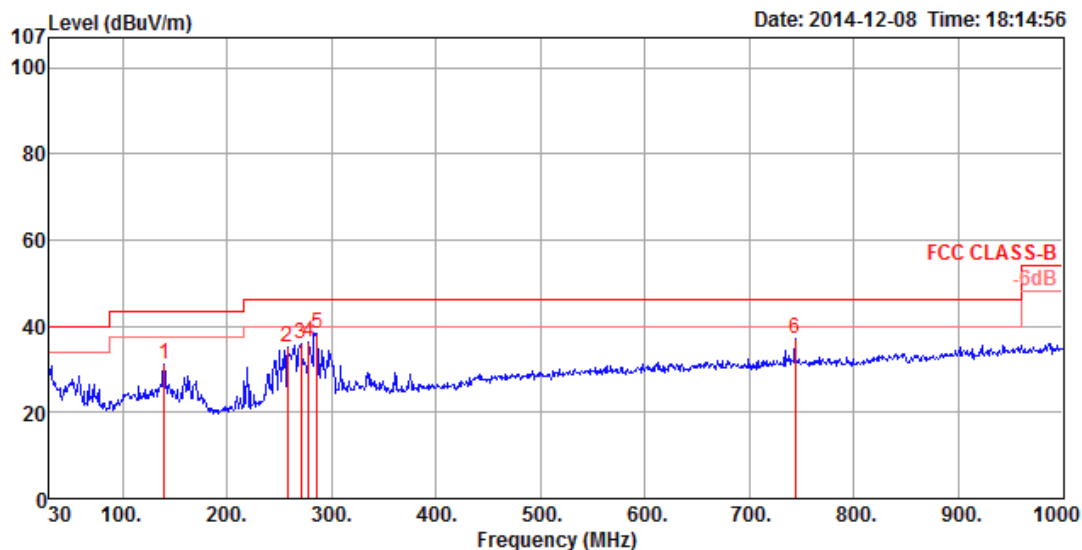

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Pol/Phase	deg	cm	
1	139.61	31.35	43.50	-12.15	50.86	0.85	32.38	12.02	HORIZONTAL	174	200	Peak
2	257.95	35.14	46.00	-10.86	52.68	1.15	32.41	13.72	HORIZONTAL	164	150	Peak
3	270.56	35.84	46.00	-10.16	53.41	1.18	32.44	13.69	HORIZONTAL	327	150	Peak
4	278.32	36.47	46.00	-9.53	54.15	1.19	32.40	13.53	HORIZONTAL	118	150	Peak
5	286.08	38.31	46.00	-7.69	55.80	1.21	32.32	13.62	HORIZONTAL	156	100	Peak
6	743.92	37.04	46.00	-8.96	47.34	1.97	32.41	20.14	HORIZONTAL	236	400	Peak

Vertical

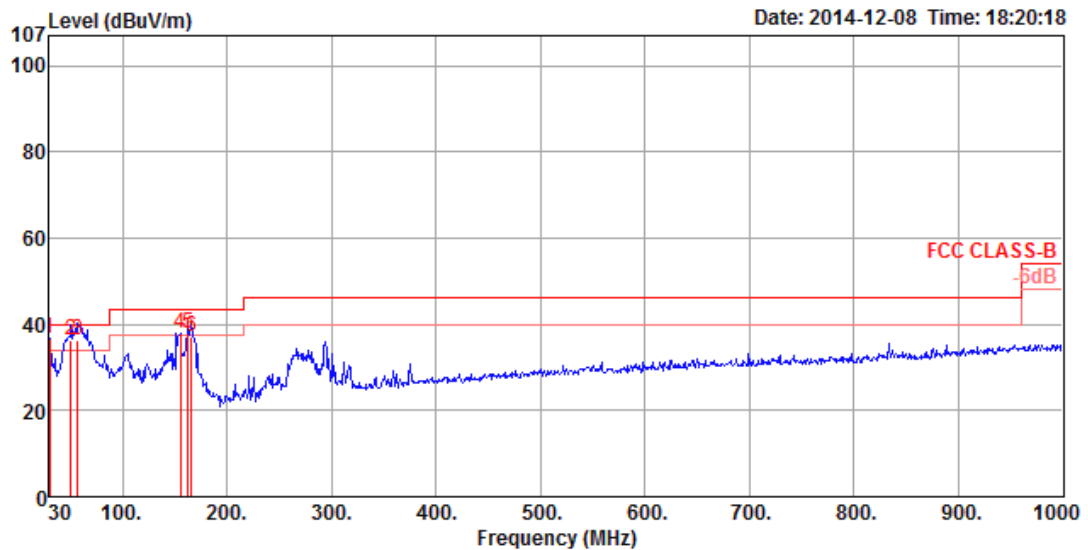

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	30.00	36.69	40.00	-3.31	48.71	0.41	32.43	20.00	VERTICAL	216	100	Peak
2	50.37	36.24	40.00	-3.76	59.27	0.50	32.53	9.00	VERTICAL	292	125	QP
3	57.16	36.47	40.00	-3.53	60.97	0.54	32.50	7.46	VERTICAL	179	125	QP
4	155.13	37.95	43.50	-5.55	58.48	0.89	32.37	10.95	VERTICAL	132	100	Peak
5	162.89	37.83	43.50	-5.67	58.77	0.91	32.40	10.55	VERTICAL	127	125	QP
6	165.80	37.28	43.50	-6.22	58.36	0.92	32.40	10.40	VERTICAL	169	100	QP

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15538.84	59.10	74.00	-14.90	47.30	7.85	38.67	34.72	Peak	181	185	HORIZONTAL
2	15539.35	45.66	54.00	-8.34	33.86	7.85	38.67	34.72	Average	181	185	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15539.13	44.93	54.00	-9.07	33.13	7.85	38.67	34.72	Average	10	186	VERTICAL
2	15541.08	58.17	74.00	-15.83	46.37	7.85	38.67	34.72	Peak	10	186	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15599.78	53.08	54.00	-0.92	41.37	7.88	38.62	34.79	Average	57	221	HORIZONTAL
2	15600.22	68.44	74.00	-5.56	56.73	7.88	38.62	34.79	Peak	57	221	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15593.63	64.80	74.00	-9.20	53.07	7.87	38.63	34.77	Peak	1	177	VERTICAL
2	15597.11	50.11	54.00	-3.89	38.38	7.88	38.62	34.77	Average	1	177	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	15719.93	69.41	74.00	-4.59	57.85	7.92	38.52	34.88	Peak	13	203	HORIZONTAL
2	15721.30	52.45	54.00	-1.55	40.89	7.92	38.52	34.88	Average	13	203	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	15723.76	65.42	74.00	-8.58	53.86	7.92	38.52	34.88	Peak	15	100	VERTICAL
2	15723.91	50.62	54.00	-3.38	39.06	7.92	38.52	34.88	Average	15	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15576.51	42.68	54.00	-11.32	30.95	7.86	38.64	34.77	Average	247	138	HORIZONTAL
2	15587.80	56.35	74.00	-17.65	44.62	7.87	38.63	34.77	Peak	247	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15576.15	55.83	74.00	-18.17	44.10	7.86	38.64	34.77	Peak	286	139	VERTICAL
2	15588.38	42.70	54.00	-11.30	30.97	7.87	38.63	34.77	Average	286	139	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15685.37	55.80	74.00	-18.20	44.20	7.90	38.55	34.85	Peak	180	100	HORIZONTAL
2	15689.49	42.76	54.00	-11.24	31.16	7.90	38.55	34.85	Average	180	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15705.05	55.43	74.00	-18.57	43.87	7.91	38.53	34.88	Peak	149	100	VERTICAL
2	15713.59	42.64	54.00	-11.36	31.08	7.92	38.52	34.88	Average	149	100	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2
Test Date	Oct. 29, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	10407.76	42.32	54.00	-11.68	29.24	8.55	39.81	35.28	Average	100	199	HORIZONTAL
2	10418.48	53.79	74.00	-20.21	40.68	8.55	39.84	35.28	Peak	100	199	HORIZONTAL
3	15614.80	44.72	54.00	-9.28	31.50	10.78	38.01	35.57	Average	100	191	HORIZONTAL
4	15642.64	56.42	74.00	-17.58	43.25	10.78	37.96	35.57	Peak	100	191	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	10384.20	54.26	74.00	-19.74	41.23	8.55	39.78	35.30	Peak	100	254	VERTICAL
2	10457.80	42.10	54.00	-11.90	28.88	8.55	39.91	35.24	Average	100	254	VERTICAL
3	15590.60	44.29	54.00	-9.71	31.05	10.78	38.04	35.58	Average	100	88	VERTICAL
4	15629.40	56.33	74.00	-17.67	43.13	10.78	37.99	35.57	Peak	100	88	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11a CH 36 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	15537.86	60.87	74.00	-13.13	49.07	7.85	38.67	34.72	Peak	332	220	HORIZONTAL
2	15542.23	45.94	54.00	-8.06	34.14	7.85	38.67	34.72	Average	332	220	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	15537.92	61.34	74.00	-12.66	49.54	7.85	38.67	34.72	Peak	9	150	VERTICAL
2	15542.89	46.20	54.00	-7.80	34.40	7.85	38.67	34.72	Average	9	150	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11a CH 40 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15600.14	52.67	54.00	-1.33	40.96	7.88	38.62	34.79	Average	330	199	HORIZONTAL
2	15609.77	67.55	74.00	-6.45	55.84	7.88	38.62	34.79	Peak	330	199	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15603.76	50.43	54.00	-3.57	38.72	7.88	38.62	34.79	Average	15	108	VERTICAL
2	15608.02	65.94	74.00	-8.06	54.23	7.88	38.62	34.79	Peak	15	108	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11a CH 48 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15718.48	53.18	54.00	-0.82	41.62	7.92	38.52	34.88	Average	356	195	HORIZONTAL
2	15723.76	68.40	74.00	-5.60	56.84	7.92	38.52	34.88	Peak	356	195	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	15713.34	63.73	74.00	-10.27	52.17	7.91	38.53	34.88	Peak	14	202	VERTICAL
2	15718.12	49.19	54.00	-4.81	37.63	7.92	38.52	34.88	Average	14	202	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	5150.00	67.32	74.00	-6.68	64.37	4.34	33.14	34.53	Peak	173	161	VERTICAL
2	5150.00	53.21	54.00	-0.79	50.26	4.34	33.14	34.53	Average	173	161	VERTICAL
3	5173.05	105.98			102.99	4.35	33.17	34.53	Average	173	161	VERTICAL
4	5176.53	115.99			112.97	4.36	33.19	34.53	Peak	173	161	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	5147.40	70.14	74.00	-3.86	67.19	4.34	33.14	34.53	Peak	173	166	VERTICAL
2	5150.00	53.73	54.00	-0.27	50.78	4.34	33.14	34.53	Average	173	166	VERTICAL
3	5202.17	120.36			117.30	4.37	33.22	34.53	Peak	173	166	VERTICAL
4	5202.17	109.60			106.54	4.37	33.22	34.53	Average	173	166	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	5144.36	61.37	74.00	-12.63	58.42	4.34	33.14	34.53	Peak	176	164	VERTICAL
2	5150.00	47.97	54.00	-6.03	45.02	4.34	33.14	34.53	Average	176	164	VERTICAL
3	5235.22	109.17			106.04	4.39	33.27	34.53	Average	176	164	VERTICAL
4	5245.21	119.85			116.68	4.40	33.30	34.53	Peak	176	164	VERTICAL
5	5350.00	48.44	54.00	-5.56	45.04	4.47	33.46	34.53	Average	176	164	VERTICAL
6	5352.17	61.24	74.00	-12.76	57.84	4.47	33.46	34.53	Peak	176	164	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableLoss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5150.00	67.48	74.00	-6.52	64.53	4.34	33.14	34.53	Peak	172	153	VERTICAL
2	5150.00	53.74	54.00	-0.26	50.79	4.34	33.14	34.53	Average	172	153	VERTICAL
3	5191.74	100.51			97.45	4.37	33.22	34.53	Average	172	153	VERTICAL
4	5192.60	111.91			108.85	4.37	33.22	34.53	Peak	172	153	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5145.66	66.45	74.00	-7.55	63.50	4.34	33.14	34.53	Peak	296	203 HORIZONTAL
2	5150.00	52.82	54.00	-1.18	49.87	4.34	33.14	34.53	Average	296	203 HORIZONTAL
3	5227.11	103.44			100.31	4.39	33.27	34.53	Average	296	203 HORIZONTAL
4	5229.28	112.94			109.81	4.39	33.27	34.53	Peak	296	203 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2
Test Date	Oct. 29, 2014		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5119.00	68.13	74.00	-5.87	63.28	6.11	33.94	35.20	Peak	181	173 VERTICAL
2	5142.00	53.68	54.00	-0.32	48.77	6.13	33.98	35.20	Average	181	173 VERTICAL
3	5219.00	109.65			104.53	6.17	34.15	35.20	Peak	181	173 VERTICAL
4	5242.00	98.56			93.38	6.20	34.18	35.20	Average	181	173 VERTICAL
5	5350.00	48.34	54.00	-5.66	42.86	6.26	34.42	35.20	Average	181	173 VERTICAL
6	5355.00	59.74	74.00	-14.26	54.26	6.26	34.42	35.20	Peak	181	173 VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Oct. 30, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5150.00	66.99	74.00	-7.01	64.04	4.34	33.14	34.53	Peak	172	159	VERTICAL
2	5150.00	51.85	54.00	-2.15	48.90	4.34	33.14	34.53	Average	172	159	VERTICAL
3	5185.79	106.63			103.61	4.36	33.19	34.53	Average	172	159	VERTICAL
4	5186.66	117.85			114.83	4.36	33.19	34.53	Peak	172	159	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableLoss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5150.00	66.95	74.00	-7.05	64.00	4.34	33.14	34.53	Peak	174	169	VERTICAL
2	5150.00	53.25	54.00	-0.75	50.30	4.34	33.14	34.53	Average	174	169	VERTICAL
3	5202.60	109.85			106.79	4.37	33.22	34.53	Average	174	169	VERTICAL
4	5203.91	120.90			117.84	4.37	33.22	34.53	Peak	174	169	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5149.57	58.93	74.00	-15.07	55.98	4.34	33.14	34.53	Peak	184	163 VERTICAL
2	5150.00	47.66	54.00	-6.34	44.71	4.34	33.14	34.53	Average	184	163 VERTICAL
3	5233.49	109.53			106.40	4.39	33.27	34.53	Average	184	163 VERTICAL
4	5235.22	120.77			117.64	4.39	33.27	34.53	Peak	184	163 VERTICAL
5	5349.57	59.28	74.00	-14.72	55.88	4.47	33.46	34.53	Peak	184	163 VERTICAL
6	5350.00	48.28	54.00	-5.72	44.88	4.47	33.46	34.53	Average	184	163 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.7.4. Test Setup Layout

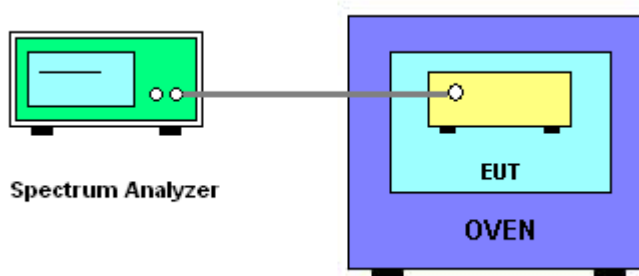

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	22°C	Humidity	63%
Test Engineer	Robert Chang	Test Date	Nov. 20, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9730
110.00	5199.9724
93.50	5199.9728
Max. Deviation (MHz)	0.027600
Max. Deviation (ppm)	5.31

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5199.9762
10	5199.9743
20	5199.9730
30	5199.9718
40	5199.9706
Max. Deviation (MHz)	0.029400
Max. Deviation (ppm)	5.65

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	101026	9kHz~40GHz	Aug. 28, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%