

FCC Test Report

Report No.: RFDLK-WTW-P20070355

FCC ID: KA2APX1860A1

Test Model: DAP-X1860

Received Date: July 16, 2020

Test Date: Aug. 03 to Sep. 11, 2020

Issued Date: Oct. 30, 2020

Applicant: D-Link Corporation

Address: No. 289, Sinhu 3rd Rd., Neihu District, Taipei City, 114, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards and references	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures	19
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup	20
4.1.6 EUT Operating Conditions	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup	37
4.2.6 EUT Operating Conditions	37
4.2.7 Test Results	38
4.3 6dB Bandwidth Measurement	40
4.3.1 Limits of 6dB Bandwidth Measurement	40
4.3.2 Test Setup	40
4.3.3 Test Instruments	40
4.3.4 Test Procedure	40
4.3.5 Deviation from Test Standard	40
4.3.6 EUT Operating Conditions	40
4.3.7 Test Result	41
4.4 Occupied Bandwidth Measurement	43
4.4.1 Test Setup	43
4.4.2 Test Instruments	43
4.4.3 Test Procedure	43
4.4.4 Deviation from Test Standard	43
4.4.5 EUT Operating Conditions	43
4.4.6 Test Results	44
4.5 Conducted Output Power Measurement	46
4.5.1 Limits of Conducted Output Power Measurement	46
4.5.2 Test Setup	46
4.5.3 Test Instruments	46
4.5.4 Test Procedures	46
4.5.5 Deviation from Test Standard	46
4.5.6 EUT Operating Conditions	46
4.5.7 Test Results	47

4.6	Power Spectral Density Measurement.....	50
4.6.1	Limits of Power Spectral Density Measurement	50
4.6.2	Test Setup.....	50
4.6.3	Test Instruments	50
4.6.4	Test Procedure	50
4.6.5	Deviation from Test Standard	50
4.6.6	EUT Operating Condition	50
4.6.7	Test Results	51
4.7	Conducted Out of Band Emission Measurement.....	54
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	54
4.7.2	Test Setup.....	54
4.7.3	Test Instruments	54
4.7.4	Test Procedure	54
4.7.5	Deviation from Test Standard	54
4.7.6	EUT Operating Condition	54
4.7.7	Test Results	54
5	Pictures of Test Arrangements.....	63
	Annex A - Band-Edge Measurement.....	64
	Appendix – Information of the Testing Laboratories	68

Release Control Record

Issue No.	Description	Date Issued
RFDLK-WTW-P20070355	Original release.	Oct. 30, 2020

1 Certificate of Conformity

Product: AX1800 Mesh Wi-Fi 6 Range Extender

Brand: D-Link

Test Model: DAP-X1860

Sample Status: ENGINEERING SAMPLE

Applicant: D-Link Corporation

Test Date: Aug. 03 to Sep. 11, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Cherry Chuo , **Date:** Oct. 30, 2020
Cherry Chuo / Specialist

Approved by : Clark Lin , **Date:** Oct. 30, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -11.09 dB at 0.49375 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.1 dB at 2390.00 MHz
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.
-	Occupied Bandwidth Measurement	-	Reference only

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted Emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX1800 Mesh Wi-Fi 6 Range Extender
Brand	D-Link
Test Model	DAP-X1860
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	100-240 Vac
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 1201 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 80211ax (HE20): 11 802.11n (HT40), VHT40, 80211ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 80211ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 80211ax (HE40): 4 802.11ac (VHT80), 80211ax (HE80): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 667.709 mW 5.18 ~ 5.24 GHz: 277.825 mW 5.745 ~ 5.825 GHz: 526.791 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 583.148 mW 5.18 ~ 5.24 GHz: 277.825 mW 5.745 ~ 5.825 GHz: 526.791 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The antennas provided to the EUT, please refer to the following table:

Antenna No.	RF Chain No.	Brand	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
1	Chain0	Lynwave	3	2.4~2.4835	Dipole	i-pex(MHF)
			4.6	5.15~5.25		
			4.6	5.25~5.35		
			4.9	5.47~5.725		
			4.9	5.725~5.85		
2	Chain1	Lynwave	3.9	2.4~2.4835	Dipole	i-pex(MHF)
			4.9	5.15~5.25		
			4.9	5.25~5.35		
			5	5.47~5.725		
			4.8	5.725~5.85		

3. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX

Note:

- All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
- The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/VHT mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)
- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
- The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned of on **Z-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	6	DSSS	DBPSK	1Mb/s

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	6	DSSS	DBPSK	1Mb/s

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (for output power)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (for output power)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE \geq 1G	25deg. C, 75%RH	120Vac, 60Hz	Ryan Du
RE $<$ 1G	25deg. C, 64%RH	120Vac, 60Hz	Kevin Ko
PLC	25deg. C, 75%RH	120Vac, 60Hz	Kevin Ko
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is $\geq 98\%$, duty factor is not required.
 If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = 16.3 ms/16.663 ms= 0.978, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.10$ dB

802.11g: Duty cycle = 3.034 ms/3.412 ms= 0.889, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.51$ dB

802.11ax (HE20): Duty cycle = 3.782 ms/4.157 ms= 0.91, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.41$ dB

802.11ax (HE40): Duty cycle = 5.122 ms/5.195 ms= 0.986

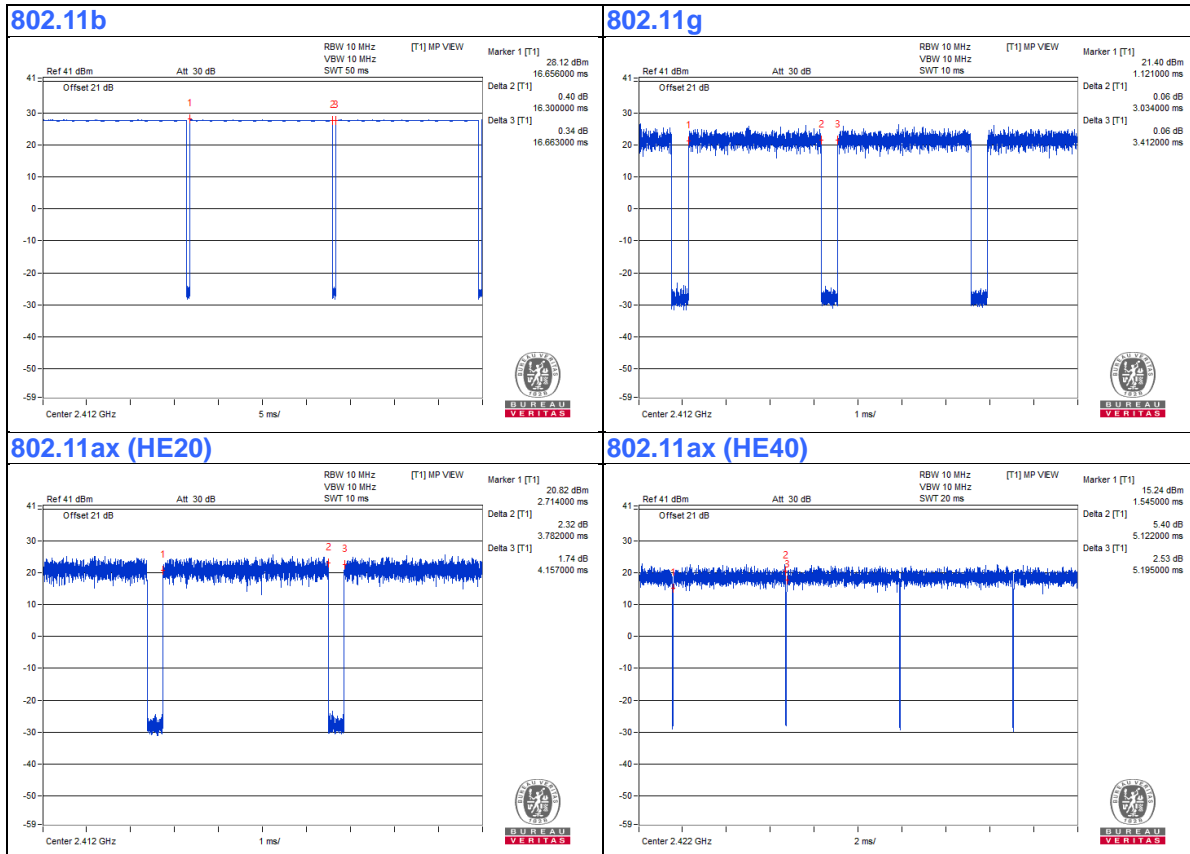

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 Cable	1	10	No	0	Provided by Lab

3.4.1 Configuration of System under Test

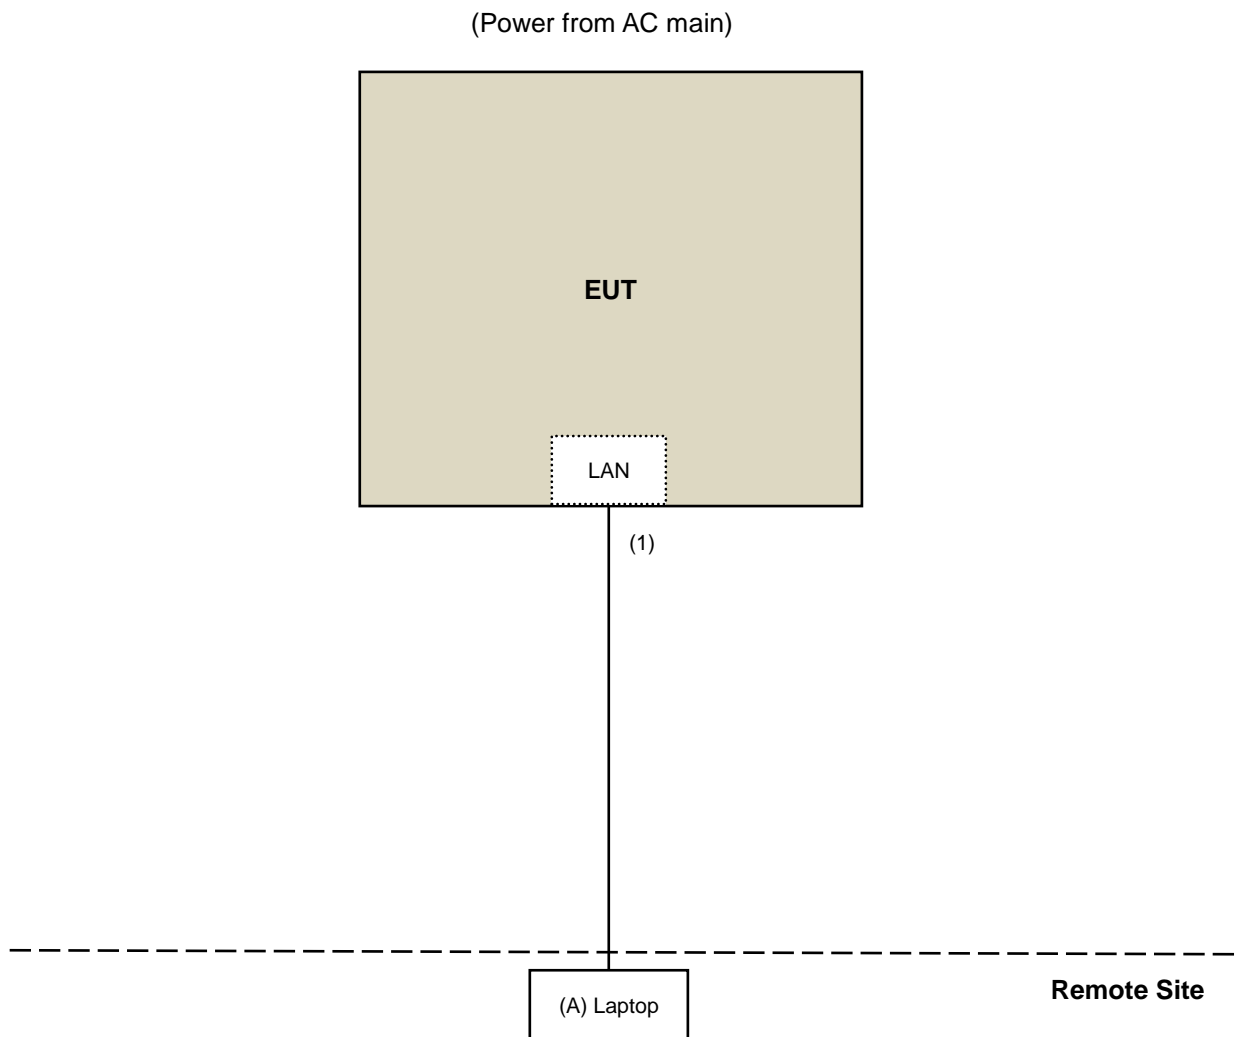

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance :

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated Emission & Bandedge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: Aug. 03 to 28, 2020

For other test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 01, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

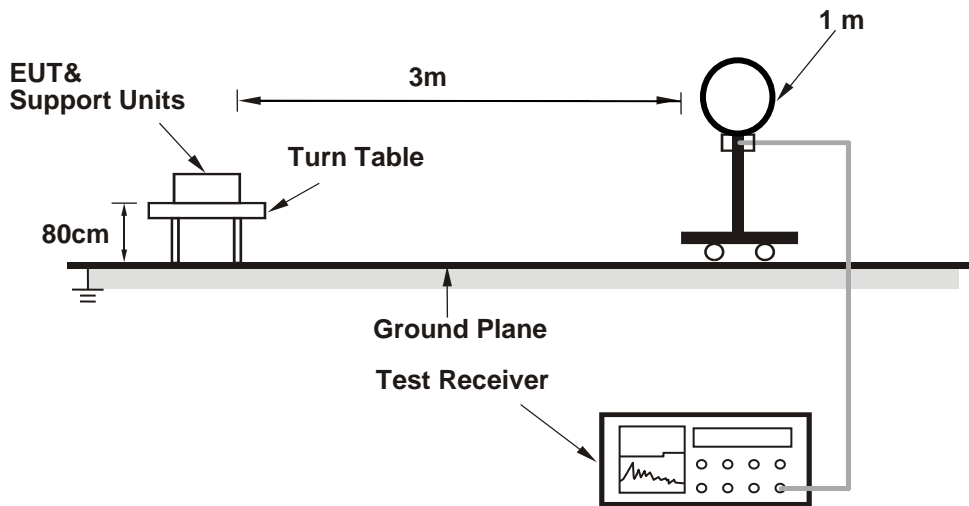

For Radiated emission 30MHz to 1GHz

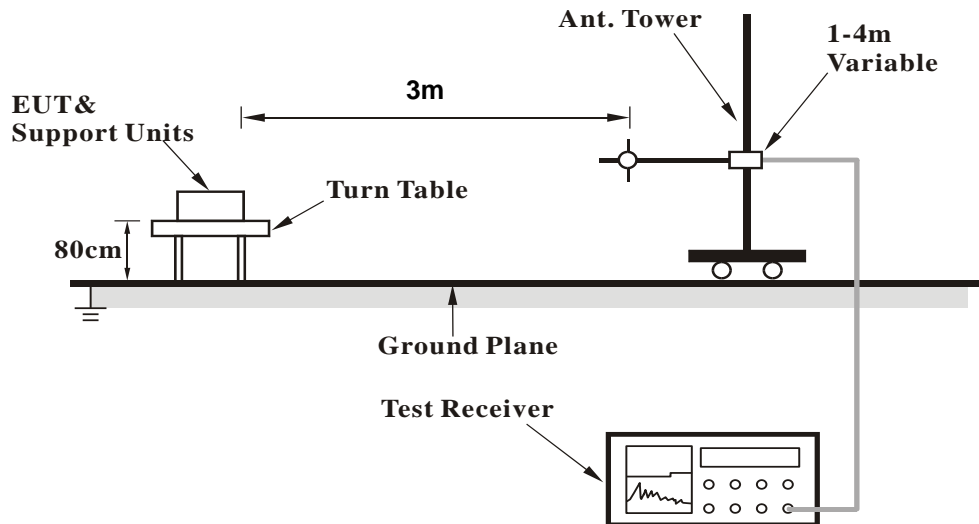

For Radiated emission above 1GHz

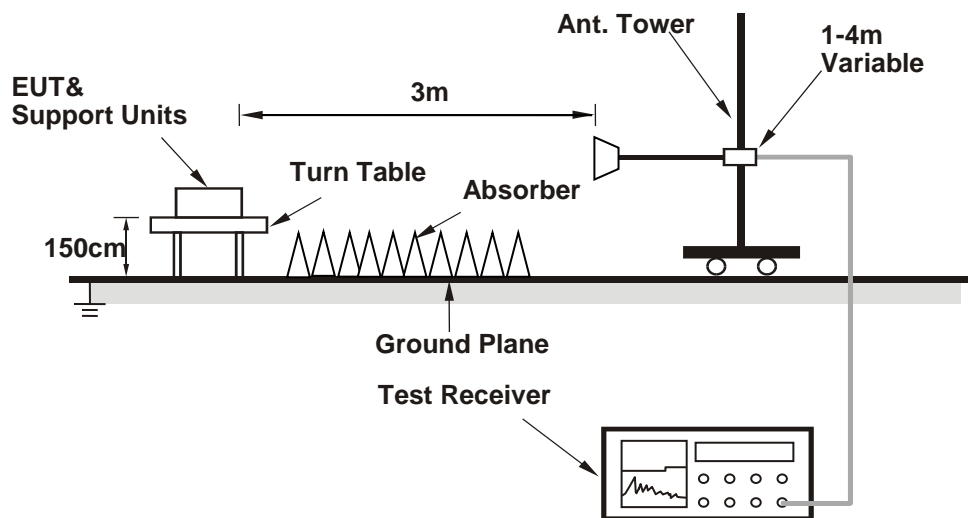

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop Computer which is placed on remote site.
- b. Controlling software (MT7915 QA 0.0.2.15) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

CDD Mode

802.11b

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	1.24 H	113	62.8	-1.9
2	2390.00	52.4 AV	54.0	-1.6	1.24 H	113	54.3	-1.9
3	*2412.00	113.8 PK			1.24 H	113	115.7	-1.9
4	*2412.00	111.0 AV			1.24 H	113	112.9	-1.9
5	4824.00	50.8 PK	74.0	-23.2	1.15 H	256	47.9	2.9
6	4824.00	49.3 AV	54.0	-4.7	1.15 H	256	46.4	2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.29 V	143	60.4	-1.9
2	2390.00	47.8 AV	54.0	-6.2	1.29 V	143	49.7	-1.9
3	*2412.00	106.1 PK			1.29 V	143	108.0	-1.9
4	*2412.00	103.2 AV			1.29 V	143	105.1	-1.9
5	4824.00	45.3 PK	74.0	-28.7	1.64 V	128	42.4	2.9
6	4824.00	42.7 AV	54.0	-11.3	1.64 V	128	39.8	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	1.21 H	114	62.9	-1.9
2	2390.00	52.9 AV	54.0	-1.1	1.21 H	114	54.8	-1.9
3	*2437.00	115.1 PK			1.21 H	114	117.1	-2.0
4	*2437.00	112.0 AV			1.21 H	114	114.0	-2.0
5	2483.50	58.7 PK	74.0	-15.3	1.21 H	114	60.6	-1.9
6	2483.50	47.1 AV	54.0	-6.9	1.21 H	114	49.0	-1.9
7	4874.00	51.2 PK	74.0	-22.8	1.21 H	270	48.4	2.8
8	4874.00	49.8 AV	54.0	-4.2	1.21 H	270	47.0	2.8
9	7311.00	46.8 PK	74.0	-27.2	2.06 H	28	37.9	8.9
10	7311.00	35.5 AV	54.0	-18.5	2.06 H	28	26.6	8.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.48 V	145	59.6	-1.9
2	2390.00	45.9 AV	54.0	-8.1	1.48 V	145	47.8	-1.9
3	*2437.00	103.1 PK			1.48 V	145	105.1	-2.0
4	*2437.00	99.8 AV			1.48 V	145	101.8	-2.0
5	2483.50	56.4 PK	74.0	-17.6	1.48 V	145	58.3	-1.9
6	2483.50	43.9 AV	54.0	-10.1	1.48 V	145	45.8	-1.9
7	4874.00	45.6 PK	74.0	-28.4	1.69 V	131	42.8	2.8
8	4874.00	43.0 AV	54.0	-11.0	1.69 V	131	40.2	2.8
9	7311.00	48.7 PK	74.0	-25.3	1.94 V	92	39.8	8.9
10	7311.00	38.9 AV	54.0	-15.1	1.94 V	92	30.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.6 PK			1.21 H	111	115.5	-1.9
2	*2462.00	110.2 AV			1.21 H	111	112.1	-1.9
3	2483.50	63.0 PK	74.0	-11.0	1.21 H	111	64.9	-1.9
4	2483.50	53.2 AV	54.0	-0.8	1.21 H	111	55.1	-1.9
5	4924.00	51.3 PK	74.0	-22.7	1.15 H	258	48.6	2.7
6	4924.00	49.7 AV	54.0	-4.3	1.15 H	258	47.0	2.7
7	7386.00	46.9 PK	74.0	-27.1	2.02 H	32	37.9	9.0
8	7386.00	35.7 AV	54.0	-18.3	2.02 H	32	26.7	9.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.2 PK			1.22 V	148	105.1	-1.9
2	*2462.00	99.8 AV			1.22 V	148	101.7	-1.9
3	2483.50	58.3 PK	74.0	-15.7	1.22 V	148	60.2	-1.9
4	2483.50	45.4 AV	54.0	-8.6	1.22 V	148	47.3	-1.9
5	4924.00	46.2 PK	74.0	-27.8	1.65 V	143	43.5	2.7
6	4924.00	43.3 AV	54.0	-10.7	1.65 V	143	40.6	2.7
7	7386.00	49.1 PK	74.0	-24.9	1.91 V	88	40.1	9.0
8	7386.00	39.2 AV	54.0	-14.8	1.91 V	88	30.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.49 H	113	69.7	-1.9
2	2390.00	53.2 AV	54.0	-0.8	1.49 H	113	55.1	-1.9
3	*2412.00	111.8 PK			1.49 H	113	113.7	-1.9
4	*2412.00	102.5 AV			1.49 H	113	104.4	-1.9
5	4824.00	51.9 PK	74.0	-22.1	1.11 H	268	49.0	2.9
6	4824.00	50.0 AV	54.0	-4.0	1.11 H	268	47.1	2.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	1.33 V	142	60.7	-1.9
2	2390.00	46.4 AV	54.0	-7.6	1.33 V	142	48.3	-1.9
3	*2412.00	102.6 PK			1.33 V	142	104.5	-1.9
4	*2412.00	94.0 AV			1.33 V	142	95.9	-1.9
5	4824.00	45.8 PK	74.0	-28.2	1.60 V	148	42.9	2.9
6	4824.00	43.2 AV	54.0	-10.8	1.60 V	148	40.3	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.8 PK	74.0	-4.2	1.45 H	109	71.7	-1.9
2	2390.00	52.7 AV	54.0	-1.3	1.45 H	109	54.6	-1.9
3	*2437.00	118.2 PK			1.45 H	109	120.2	-2.0
4	*2437.00	108.8 AV			1.45 H	109	110.8	-2.0
5	2483.50	71.3 PK	74.0	-2.7	1.45 H	109	73.2	-1.9
6	2483.50	51.3 AV	54.0	-2.7	1.45 H	109	53.2	-1.9
7	4874.00	51.5 PK	74.0	-22.5	1.10 H	256	48.7	2.8
8	4874.00	50.0 AV	54.0	-4.0	1.10 H	256	47.2	2.8
9	7311.00	47.2 PK	74.0	-26.8	2.07 H	27	38.3	8.9
10	7311.00	35.9 AV	54.0	-18.1	2.07 H	27	27.0	8.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	1.47 V	144	65.9	-1.9
2	2390.00	46.8 AV	54.0	-7.2	1.47 V	144	48.7	-1.9
3	*2437.00	107.8 PK			1.47 V	144	109.8	-2.0
4	*2437.00	98.5 AV			1.47 V	144	100.5	-2.0
5	2483.50	60.2 PK	74.0	-13.8	1.47 V	144	62.1	-1.9
6	2483.50	45.8 AV	54.0	-8.2	1.47 V	144	47.7	-1.9
7	4874.00	46.2 PK	74.0	-27.8	1.71 V	138	43.4	2.8
8	4874.00	43.2 AV	54.0	-10.8	1.71 V	138	40.4	2.8
9	7311.00	49.3 PK	74.0	-24.7	1.85 V	73	40.4	8.9
10	7311.00	39.1 AV	54.0	-14.9	1.85 V	73	30.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.0 PK			1.28 H	111	114.9	-1.9
2	*2462.00	103.0 AV			1.28 H	111	104.9	-1.9
3	2483.50	73.1 PK	74.0	-0.9	1.28 H	111	75.0	-1.9
4	2483.50	52.4 AV	54.0	-1.6	1.28 H	111	54.3	-1.9
5	4924.00	51.7 PK	74.0	-22.3	1.05 H	267	49.0	2.7
6	4924.00	50.2 AV	54.0	-3.8	1.05 H	267	47.5	2.7
7	7386.00	46.5 PK	74.0	-27.5	2.06 H	42	37.5	9.0
8	7386.00	35.4 AV	54.0	-18.6	2.06 H	42	26.4	9.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.2 PK			1.19 V	145	104.1	-1.9
2	*2462.00	92.6 AV			1.19 V	145	94.5	-1.9
3	2483.50	61.7 PK	74.0	-12.3	1.19 V	145	63.6	-1.9
4	2483.50	46.1 AV	54.0	-7.9	1.19 V	145	48.0	-1.9
5	4924.00	45.8 PK	74.0	-28.2	1.69 V	128	43.1	2.7
6	4924.00	42.9 AV	54.0	-11.1	1.69 V	128	40.2	2.7
7	7386.00	48.9 PK	74.0	-25.1	1.86 V	65	39.9	9.0
8	7386.00	38.9 AV	54.0	-15.1	1.86 V	65	29.9	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE20)

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	1.26 H	108	70.7	-1.9
2	2390.00	52.3 AV	54.0	-1.7	1.26 H	108	54.2	-1.9
3	*2412.00	112.1 PK			1.26 H	108	114.0	-1.9
4	*2412.00	101.8 AV			1.26 H	108	103.7	-1.9
5	4824.00	51.5 PK	74.0	-22.5	1.09 H	278	48.6	2.9
6	4824.00	50.2 AV	54.0	-3.8	1.09 H	278	47.3	2.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.11 V	145	60.4	-1.9
2	2390.00	47.1 AV	54.0	-6.9	1.11 V	145	49.0	-1.9
3	*2412.00	103.3 PK			1.11 V	145	105.2	-1.9
4	*2412.00	92.6 AV			1.11 V	145	94.5	-1.9
5	4824.00	46.2 PK	74.0	-27.8	1.66 V	125	43.3	2.9
6	4824.00	43.3 AV	54.0	-10.7	1.66 V	125	40.4	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.17 H	105	71.3	-1.9
2	2390.00	53.6 AV	54.0	-0.4	1.17 H	105	55.5	-1.9
3	*2437.00	117.5 PK			1.17 H	105	119.5	-2.0
4	*2437.00	106.4 AV			1.17 H	105	108.4	-2.0
5	2483.50	70.7 PK	74.0	-3.3	1.17 H	105	72.6	-1.9
6	2483.50	51.2 AV	54.0	-2.8	1.17 H	105	53.1	-1.9
7	4874.00	52.0 PK	74.0	-22.0	1.00 H	277	49.2	2.8
8	4874.00	50.3 AV	54.0	-3.7	1.00 H	277	47.5	2.8
9	7311.00	46.7 PK	74.0	-27.3	2.03 H	57	37.8	8.9
10	7311.00	35.5 AV	54.0	-18.5	2.03 H	57	26.6	8.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.51 V	144	64.4	-1.9
2	2390.00	46.9 AV	54.0	-7.1	1.51 V	144	48.8	-1.9
3	*2437.00	107.9 PK			1.51 V	144	109.9	-2.0
4	*2437.00	96.5 AV			1.51 V	144	98.5	-2.0
5	2483.50	59.1 PK	74.0	-14.9	1.51 V	144	61.0	-1.9
6	2483.50	45.0 AV	54.0	-9.0	1.51 V	144	46.9	-1.9
7	4874.00	45.6 PK	74.0	-28.4	1.63 V	118	42.8	2.8
8	4874.00	42.7 AV	54.0	-11.3	1.63 V	118	39.9	2.8
9	7311.00	48.6 PK	74.0	-25.4	1.90 V	52	39.7	8.9
10	7311.00	38.9 AV	54.0	-15.1	1.90 V	52	30.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.3 PK			1.17 H	111	115.2	-1.9
2	*2462.00	101.1 AV			1.17 H	111	103.0	-1.9
3	2483.50	67.9 PK	74.0	-6.1	1.17 H	111	69.8	-1.9
4	2483.50	53.8 AV	54.0	-0.2	1.17 H	111	55.7	-1.9
5	4924.00	51.5 PK	74.0	-22.5	1.00 H	287	48.8	2.7
6	4924.00	49.9 AV	54.0	-4.1	1.00 H	287	47.2	2.7
7	7386.00	46.7 PK	74.0	-27.3	2.05 H	63	37.7	9.0
8	7386.00	35.4 AV	54.0	-18.6	2.05 H	63	26.4	9.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.8 PK			1.22 V	144	102.7	-1.9
2	*2462.00	89.4 AV			1.22 V	144	91.3	-1.9
3	2483.50	57.4 PK	74.0	-16.6	1.22 V	144	59.3	-1.9
4	2483.50	45.8 AV	54.0	-8.2	1.22 V	144	47.7	-1.9
5	4924.00	45.2 PK	74.0	-28.8	1.61 V	128	42.5	2.7
6	4924.00	42.6 AV	54.0	-11.4	1.61 V	128	39.9	2.7
7	7386.00	48.7 PK	74.0	-25.3	1.89 V	50	39.7	9.0
8	7386.00	38.7 AV	54.0	-15.3	1.89 V	50	29.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE40)

Channel	TX Channel 3	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2385.50	71.4 PK	74.0	-2.6	1.23 H	111	73.3	-1.9
2	2385.50	51.8 AV	54.0	-2.2	1.23 H	111	53.7	-1.9
3	2390.00	67.7 PK	74.0	-6.3	1.23 H	111	69.6	-1.9
4	2390.00	53.2 AV	54.0	-0.8	1.23 H	111	55.1	-1.9
5	*2422.00	110.1 PK			1.23 H	111	112.0	-1.9
6	*2422.00	97.7 AV			1.23 H	111	99.6	-1.9
7	4844.00	51.1 PK	74.0	-22.9	1.00 H	294	48.2	2.9
8	4844.00	49.7 AV	54.0	-4.3	1.00 H	294	46.8	2.9
9	7266.00	46.4 PK	74.0	-27.6	2.07 H	70	37.6	8.8
10	7266.00	34.9 AV	54.0	-19.1	2.07 H	70	26.1	8.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.51	62.8 PK	74.0	-11.2	1.49 V	143	64.7	-1.9
2	2386.51	45.0 AV	54.0	-9.0	1.49 V	143	46.9	-1.9
3	2390.00	58.6 PK	74.0	-15.4	1.49 V	143	60.5	-1.9
4	2390.00	45.9 AV	54.0	-8.1	1.49 V	143	47.8	-1.9
5	*2422.00	97.9 PK			1.49 V	143	99.8	-1.9
6	*2422.00	86.8 AV			1.49 V	143	88.7	-1.9
7	4844.00	45.2 PK	74.0	-28.8	1.65 V	136	42.3	2.9
8	4844.00	42.3 AV	54.0	-11.7	1.65 V	136	39.4	2.9
9	7266.00	48.7 PK	74.0	-25.3	1.91 V	57	39.9	8.8
10	7266.00	38.7 AV	54.0	-15.3	1.91 V	57	29.9	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.17 H	115	71.8	-1.9
2	2390.00	53.9 AV	54.0	-0.1	1.17 H	115	55.8	-1.9
3	*2437.00	110.9 PK			1.17 H	115	112.9	-2.0
4	*2437.00	100.1 AV			1.17 H	115	102.1	-2.0
5	2483.50	69.6 PK	74.0	-4.4	1.17 H	115	71.5	-1.9
6	2483.50	50.6 AV	54.0	-3.4	1.17 H	115	52.5	-1.9
7	4874.00	51.4 PK	74.0	-22.6	1.00 H	280	48.6	2.8
8	4874.00	49.7 AV	54.0	-4.3	1.00 H	280	46.9	2.8
9	7311.00	46.2 PK	74.0	-27.8	2.09 H	82	37.3	8.9
10	7311.00	34.7 AV	54.0	-19.3	2.09 H	82	25.8	8.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.50 V	143	62.5	-1.9
2	2390.00	47.9 AV	54.0	-6.1	1.50 V	143	49.8	-1.9
3	*2437.00	101.0 PK			1.50 V	143	103.0	-2.0
4	*2437.00	90.0 AV			1.50 V	143	92.0	-2.0
5	2483.50	60.6 PK	74.0	-13.4	1.50 V	143	62.5	-1.9
6	2483.50	45.7 AV	54.0	-8.3	1.50 V	143	47.6	-1.9
7	4874.00	44.9 PK	74.0	-29.1	1.61 V	149	42.1	2.8
8	4874.00	42.0 AV	54.0	-12.0	1.61 V	149	39.2	2.8
9	7311.00	48.8 PK	74.0	-25.2	1.90 V	65	39.9	8.9
10	7311.00	38.8 AV	54.0	-15.2	1.90 V	65	29.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 9	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	111.3 PK			1.21 H	110	113.2	-1.9
2	*2452.00	98.6 AV			1.21 H	110	100.5	-1.9
3	2483.50	65.7 PK	74.0	-8.3	1.21 H	110	67.6	-1.9
4	2483.50	52.7 AV	54.0	-1.3	1.21 H	110	54.6	-1.9
5	4904.00	50.8 PK	74.0	-23.2	1.00 H	307	48.1	2.7
6	4904.00	49.7 AV	54.0	-4.3	1.00 H	307	47.0	2.7
7	7356.00	46.8 PK	74.0	-27.2	2.11 H	82	37.9	8.9
8	7356.00	35.4 AV	54.0	-18.6	2.11 H	82	26.5	8.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	101.1 PK			1.26 V	141	103.0	-1.9
2	*2452.00	90.8 AV			1.26 V	141	92.7	-1.9
3	2483.50	59.1 PK	74.0	-14.9	1.26 V	141	61.0	-1.9
4	2483.50	48.3 AV	54.0	-5.7	1.26 V	141	50.2	-1.9
5	4904.00	45.2 PK	74.0	-28.8	1.55 V	154	42.5	2.7
6	4904.00	42.3 AV	54.0	-11.7	1.55 V	154	39.6	2.7
7	7356.00	48.6 PK	74.0	-25.4	1.88 V	55	39.7	8.9
8	7356.00	38.8 AV	54.0	-15.2	1.88 V	55	29.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CDD Mode

Below 1GHz Data:


802.11b

Channel	TX Channel 6	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.53	28.3 QP	40.0	-11.7	1.50 H	180	37.2	-8.9
2	137.67	27.2 QP	43.5	-16.3	1.50 H	298	34.7	-7.5
3	250.02	32.8 QP	46.0	-13.2	1.00 H	22	40.8	-8.0
4	369.65	27.8 QP	46.0	-18.2	1.00 H	151	31.5	-3.7
5	579.72	31.2 QP	46.0	-14.8	1.00 H	277	29.7	1.5
6	679.08	33.7 QP	46.0	-12.3	1.50 H	157	30.1	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

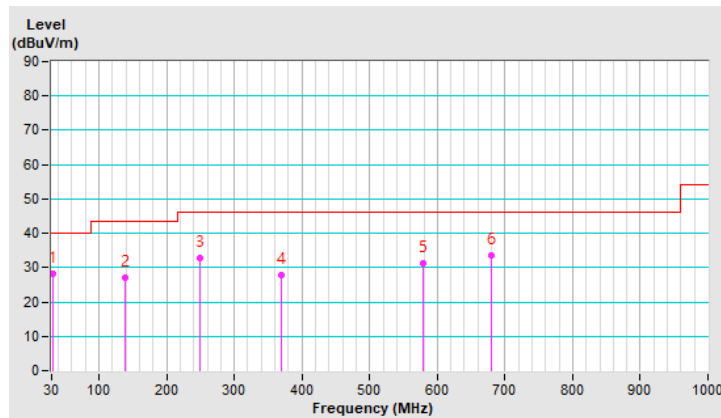


Channel	TX Channel 6	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	36.1 QP	40.0	-3.9	1.00 V	360	44.8	-8.7
2	55.80	31.0 QP	40.0	-9.0	1.00 V	187	38.7	-7.7
3	137.69	27.0 QP	43.5	-16.5	1.00 V	208	34.5	-7.5
4	250.02	30.9 QP	46.0	-15.1	2.00 V	346	38.9	-8.0
5	460.39	29.5 QP	46.0	-16.5	1.50 V	330	30.7	-1.2
6	595.83	30.7 QP	46.0	-15.3	1.50 V	161	28.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

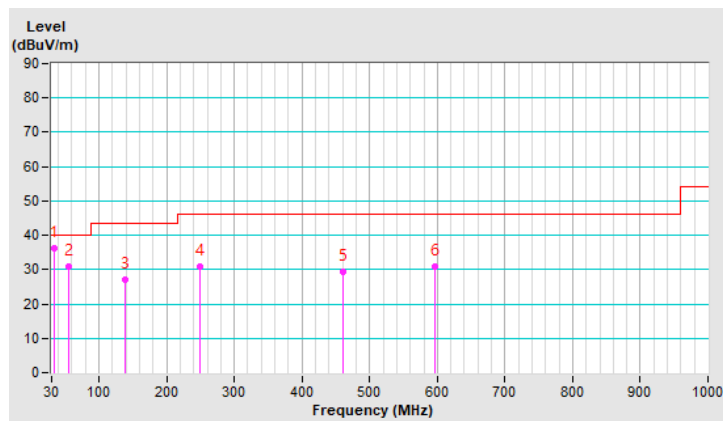

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Aug. 11, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

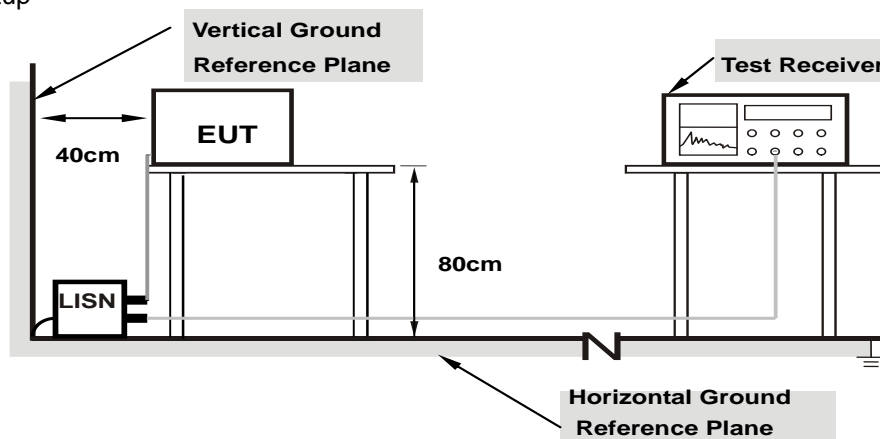

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.98	19.92	8.43	29.90	18.41	66.00	56.00	-36.10	-37.59
2	0.23203	9.99	16.10	5.37	26.09	15.36	62.38	52.38	-36.29	-37.02
3	0.49375	10.02	29.06	24.99	39.08	35.01	56.10	46.10	-17.02	-11.09
4	0.76719	10.03	16.46	10.68	26.49	20.71	56.00	46.00	-29.51	-25.29
5	9.78516	10.66	17.64	10.53	28.30	21.19	60.00	50.00	-31.70	-28.81
6	20.83594	11.42	17.48	10.35	28.90	21.77	60.00	50.00	-31.10	-28.23

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

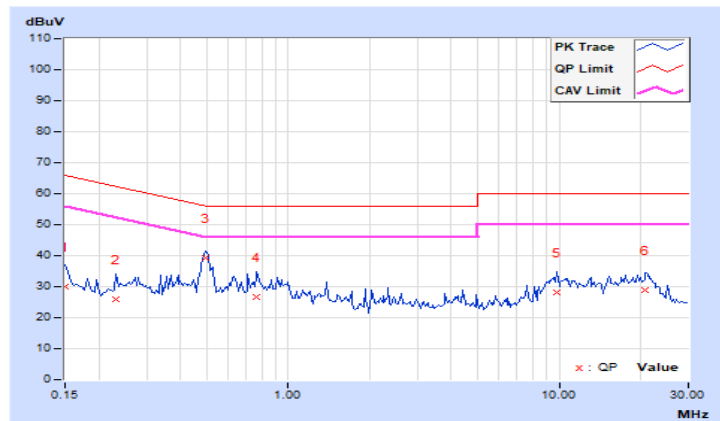


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.99	20.70	8.18	30.69	18.17	66.00	56.00	-35.31	-37.83
2	0.49766	10.04	24.79	20.30	34.83	30.34	56.04	46.04	-21.21	-15.70
3	1.71094	10.14	12.69	3.27	22.83	13.41	56.00	46.00	-33.17	-32.59
4	9.81641	10.59	11.47	3.45	22.06	14.04	60.00	50.00	-37.94	-35.96
5	18.26563	11.04	13.91	5.11	24.95	16.15	60.00	50.00	-35.05	-33.85
6	21.69922	11.17	15.10	6.58	26.27	17.75	60.00	50.00	-33.73	-32.25

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

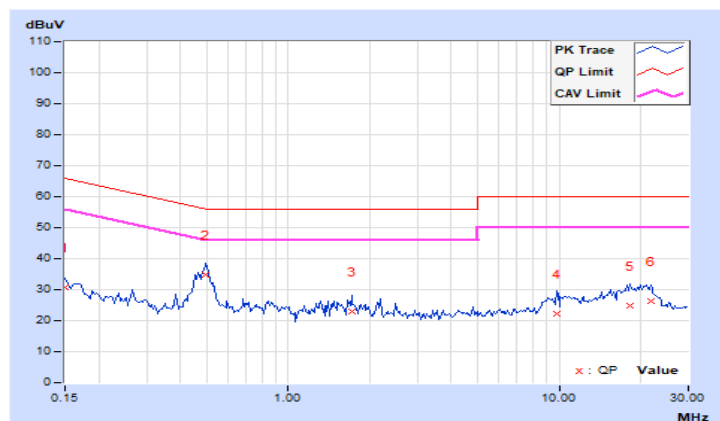


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	9.11	9.58	0.5	Pass
6	2437	10.08	10.09	0.5	Pass
11	2462	8.12	8.11	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	14.68	15.2	0.5	Pass
6	2437	15.97	15.73	0.5	Pass
11	2462	15.15	15.14	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	18.65	18.83	0.5	Pass
6	2437	18.01	18.04	0.5	Pass
11	2462	18.7	18.8	0.5	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	37.73	36.61	0.5	Pass
6	2437	37.02	37.39	0.5	Pass
9	2452	37.53	37.38	0.5	Pass

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

Same as Item 4.3.6.

4.4.6 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain0	Chain1
1	2412	14.64	15.48
6	2437	15.72	16.8
11	2462	12.96	13.08

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain0	Chain1
1	2412	16.68	16.44
6	2437	23.4	28.2
11	2462	16.68	16.56

802.11ax (HE20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain0	Chain1
1	2412	19.08	18.96
6	2437	25.08	27.96
11	2462	19.08	18.96

802.11ax (HE40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain0	Chain1
3	2422	37.92	37.92
6	2437	37.92	38.4
9	2452	37.92	37.92

Spectrum Plot of Max. Value


802.11b / Chain 1: CH6

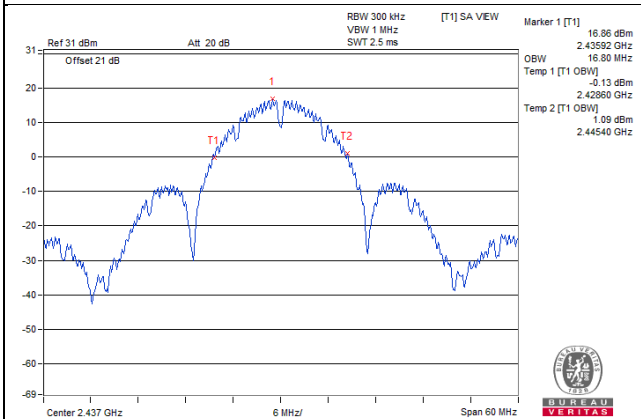


802.11g / Chain 1: CH6

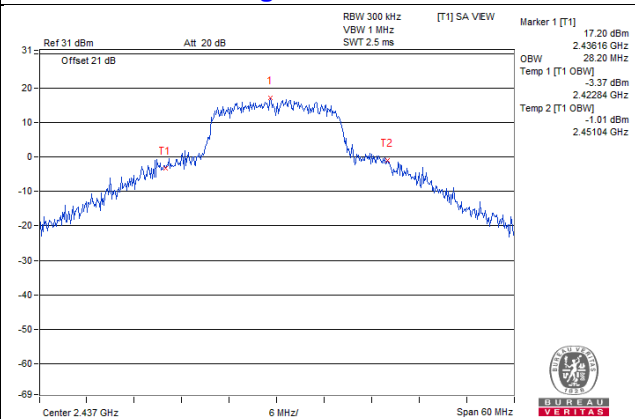

802.11ax (HE20) / Chain 1: CH6

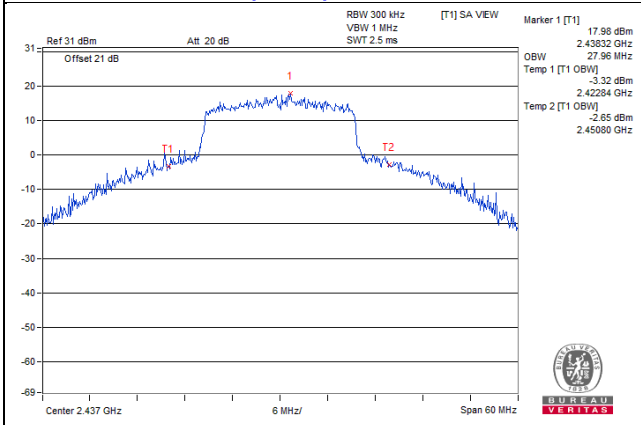

802.11ax (HE40) / Chain 1: CH6

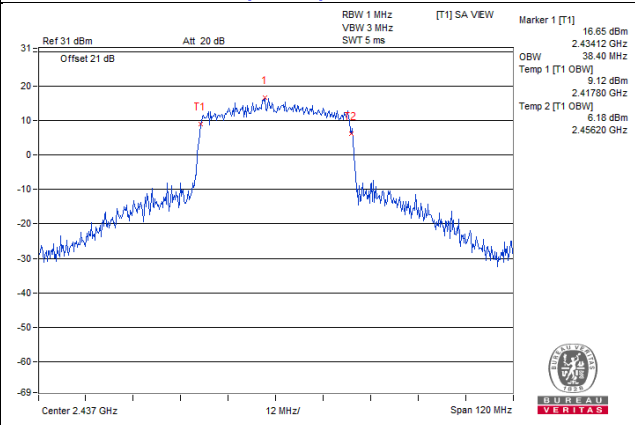

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.64	25.15	618.412	27.91	30.00	Pass
6	2437	25.01	25.45	667.709	28.25	30.00	Pass
11	2462	22.82	23.13	397.015	25.99	30.00	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.71	19.02	154.101	21.88	30.00	Pass
6	2437	24.56	24.98	600.534	27.79	30.00	Pass
11	2462	19.63	19.54	181.783	22.60	30.00	Pass

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.23	18.41	135.87	21.33	30.00	Pass
6	2437	24.01	24.74	549.619	27.40	30.00	Pass
11	2462	17.72	17.91	120.958	20.83	30.00	Pass

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.52	17.81	116.889	20.68	30.00	Pass
6	2437	20.12	20.64	218.679	23.40	30.00	Pass
9	2452	17.91	18.27	128.945	21.10	30.00	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.44	18.67	143.444	21.57	30.00	Pass
6	2437	24.24	25.02	583.148	27.66	30.00	Pass
11	2462	17.93	18.12	126.95	21.04	30.00	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.75	18.01	122.807	20.89	30.00	Pass
6	2437	20.39	20.85	231.014	23.64	30.00	Pass
9	2452	18.15	18.55	136.927	21.36	30.00	Pass

Beamformig Mode

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.23	18.41	135.87	21.33	29.53	Pass
6	2437	24.01	24.74	549.619	27.40	29.53	Pass
11	2462	17.72	17.91	120.958	20.83	29.53	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.47 \text{dBi} > 6 \text{dBi}$, so the power limit shall be reduced to $30 - (6.47 - 6) = 29.53 \text{dBm}$.

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.52	17.81	116.889	20.68	29.53	Pass
6	2437	20.12	20.64	218.679	23.40	29.53	Pass
9	2452	17.91	18.27	128.945	21.10	29.53	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.47 \text{dBi} > 6 \text{dBi}$, so the power limit shall be reduced to $30 - (6.47 - 6) = 29.53 \text{dBm}$.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.44	18.67	143.444	21.57	29.53	Pass
6	2437	24.24	25.02	583.148	27.66	29.53	Pass
11	2462	17.93	18.12	126.95	21.04	29.53	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.47 \text{dBi} > 6 \text{dBi}$, so the power limit shall be reduced to $30 - (6.47 - 6) = 29.53 \text{dBm}$.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.75	18.01	122.807	20.89	29.53	Pass
6	2437	20.39	20.85	231.014	23.64	29.53	Pass
9	2452	18.15	18.55	136.927	21.36	29.53	Pass


Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.47 \text{dBi} > 6 \text{dBi}$, so the power limit shall be reduced to $30 - (6.47 - 6) = 29.53 \text{dBm}$.

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

For 802.11ax (HE40):

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For 802.11b, 802.11g, 802.11ax (HE20):

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log(1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
1	2412	-5.51	-5.42	0.10	-2.35	7.53	Pass
6	2437	-5.81	-5.78	0.10	-2.68	7.53	Pass
11	2462	-7.08	-7.43	0.10	-4.14	7.53	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.47 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $8 - (6.47 - 6) = 7.53 \text{ dBm}$.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
1	2412	-13.15	-12.90	0.51	-9.50	7.53	Pass
6	2437	-8.06	-7.07	0.51	-4.02	7.53	Pass
11	2462	-11.80	-12.46	0.51	-8.60	7.53	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 6.47 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $8 - (6.47 - 6) = 7.53 \text{ dBm}$.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
1	2412	-14.89	-15.05	0.41	-11.55	7.53	Pass
6	2437	-8.70	-10.10	0.41	-5.92	7.53	Pass
11	2462	-15.03	-14.88	0.41	-11.53	7.53	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2]$ = 6.47 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.47 - 6) = 7.53 \text{ dBm}$.
 3. Refer to section 3.3 for duty cycle spectrum plot.


802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1			
3	2422	-18.05	-18.58	-15.30	7.53	Pass
6	2437	-16.09	-14.43	-12.17	7.53	Pass
9	2452	-16.64	-15.58	-13.07	7.53	Pass


- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2]$ = 6.47 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.47 - 6) = 7.53 \text{ dBm}$.

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH1

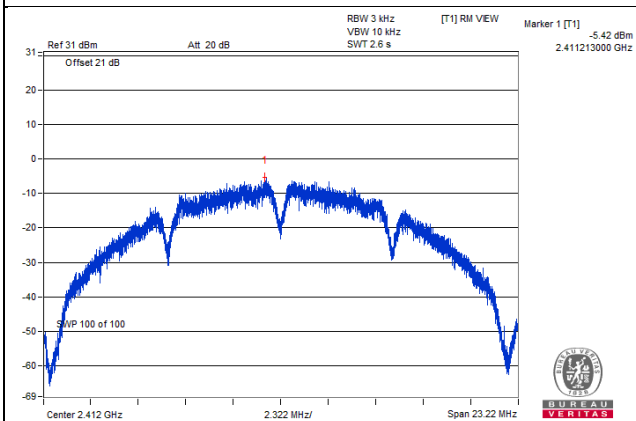


802.11g / Chain 1 : CH6

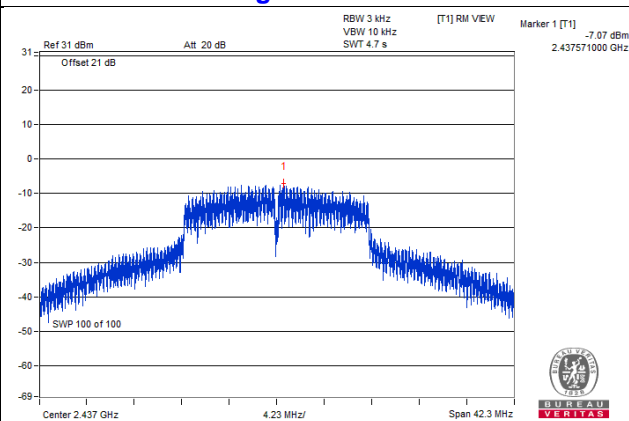

802.11ax (HE20) / Chain 0 : CH6

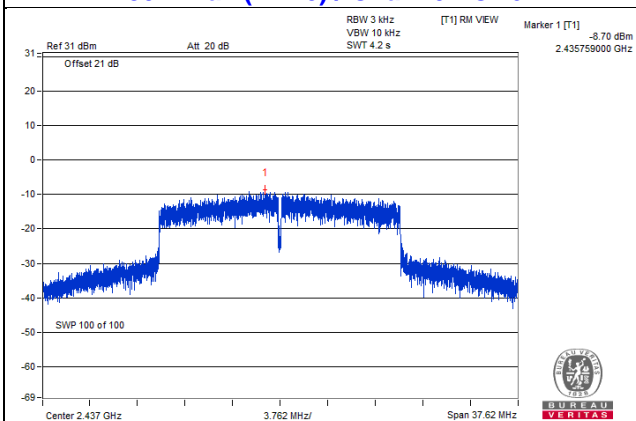

802.11ax (HE40) / Chain 1 : CH6

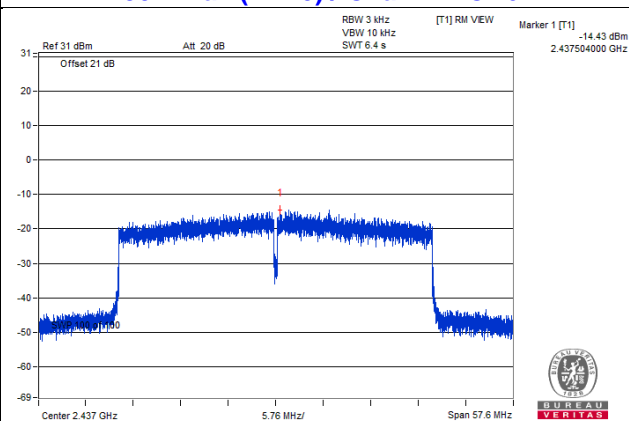


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.


4.7.6 EUT Operating Condition

Same as Item 4.3.6







4.7.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

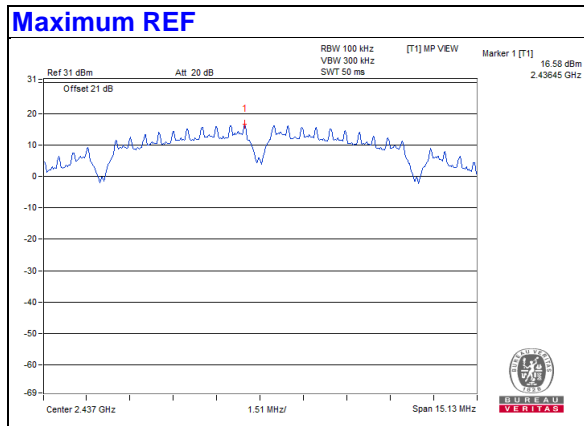


Chain 0

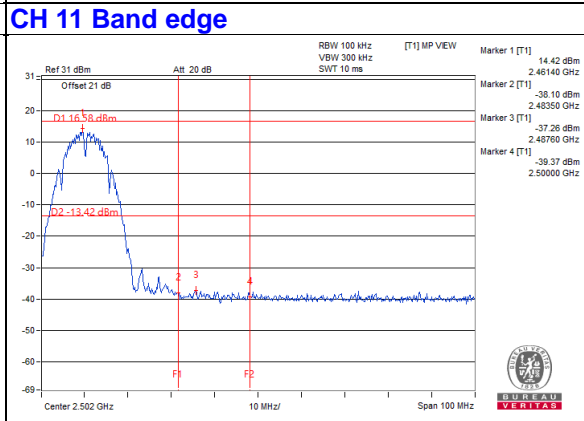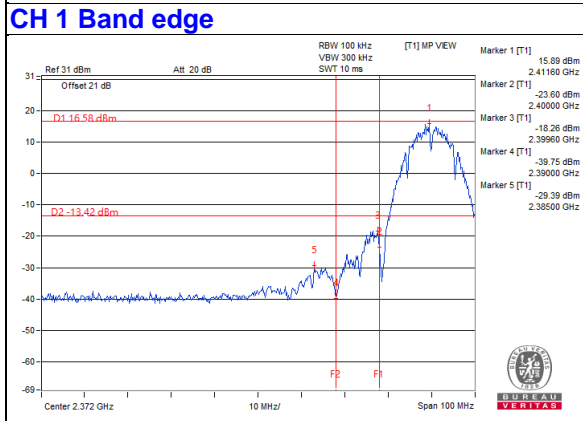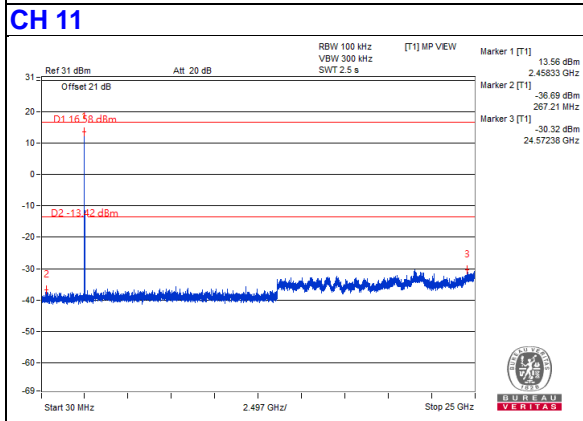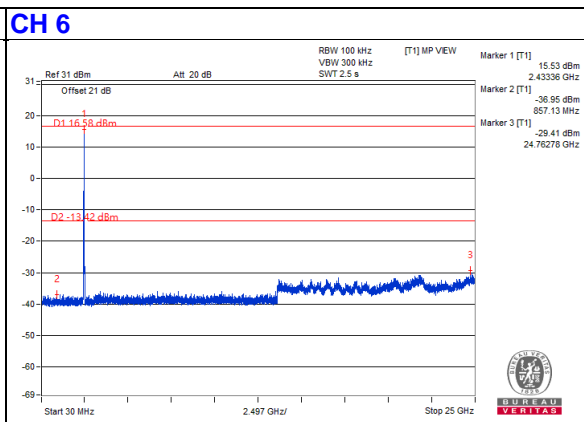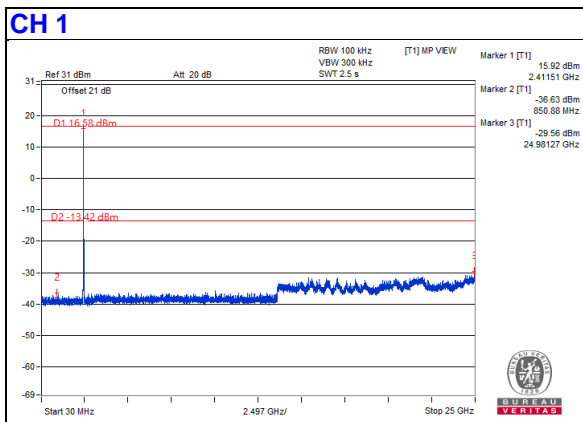


Chain 1


CH 1

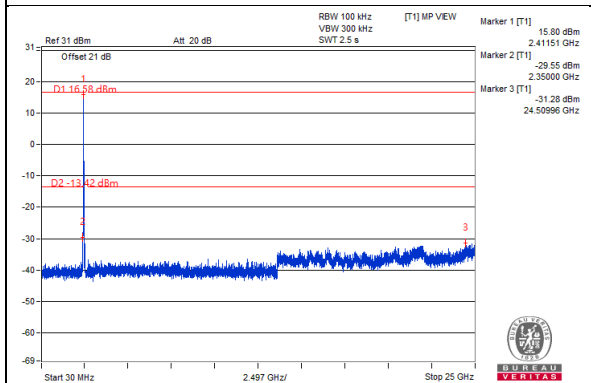


CH 6

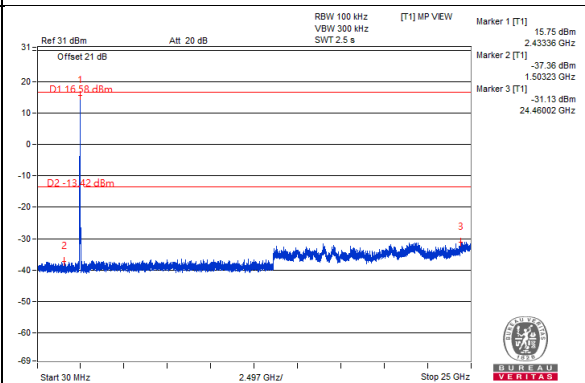


CH 11

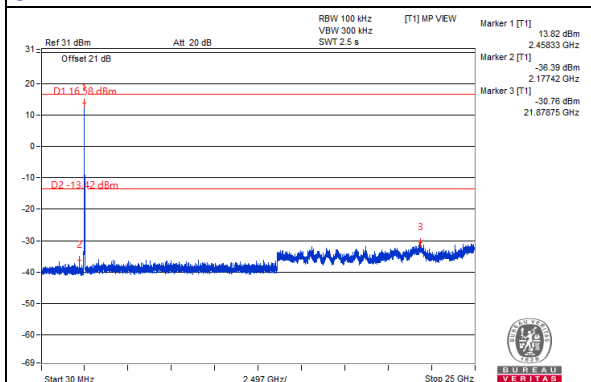

CH 1 Band edge

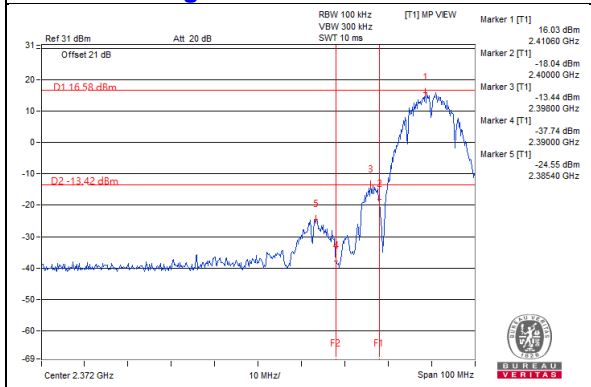


CH 11 Band edge

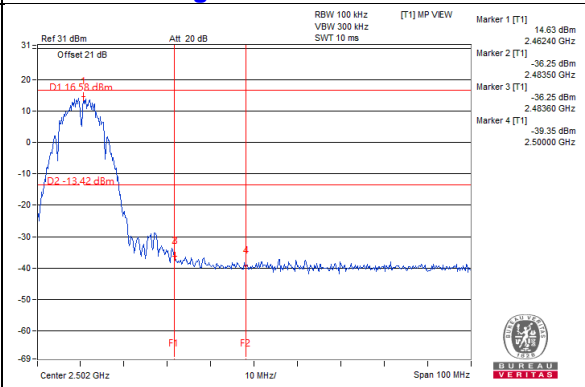


802.11g

Maximum REF

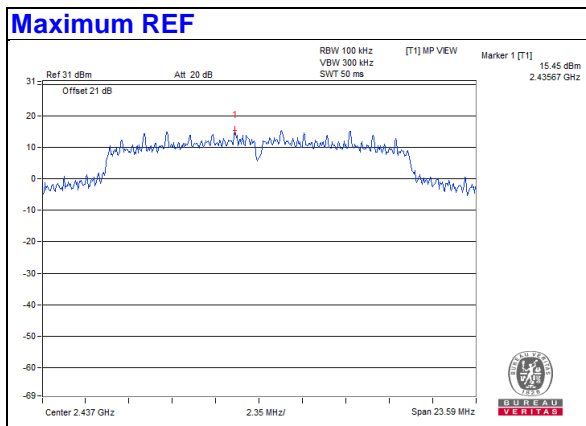


Chain 0


CH 1

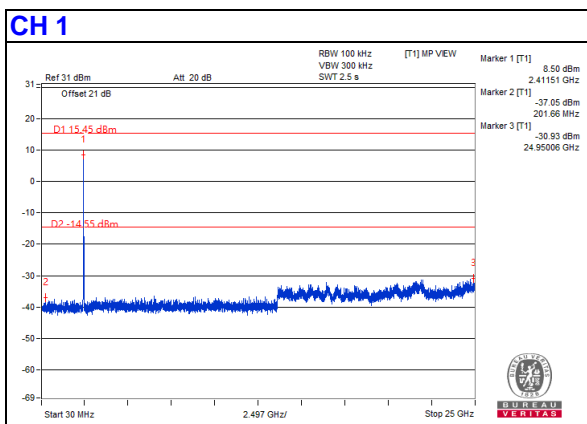

CH 6

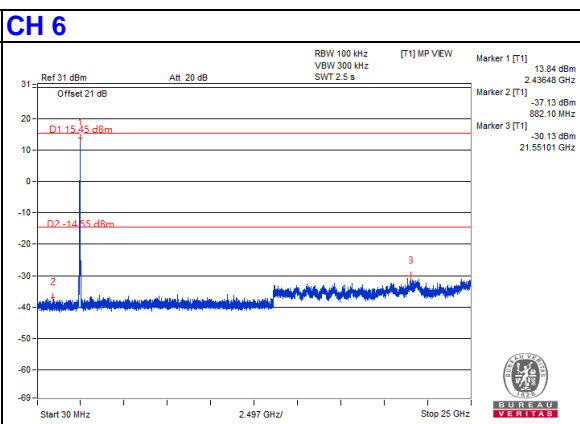


CH 11

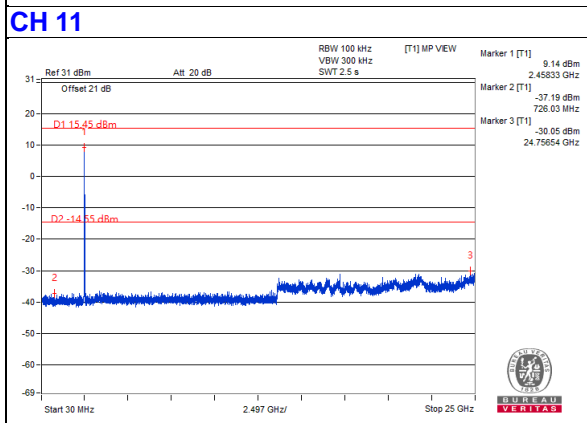


CH 11 Band edge



CH 1 Band edge

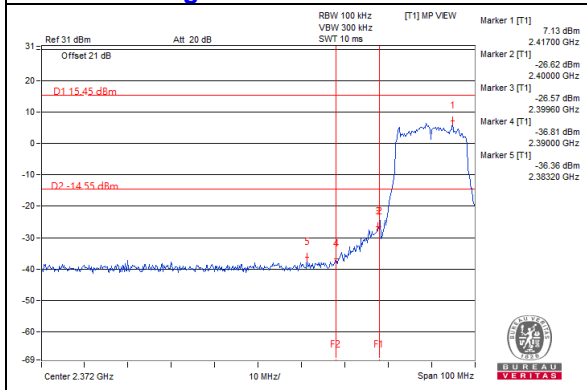


CH 11 Band edge

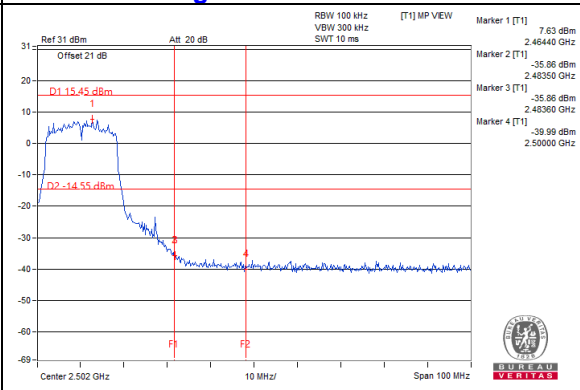


Chain 1


CH 1

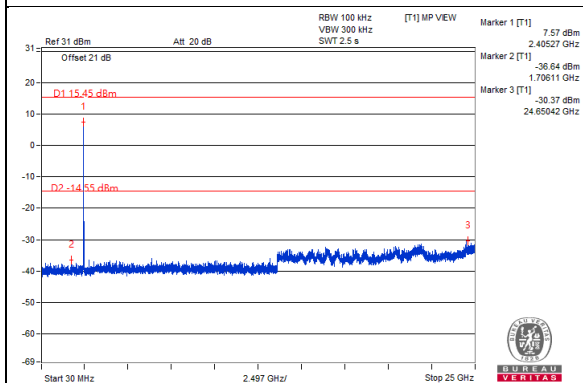


CH 6

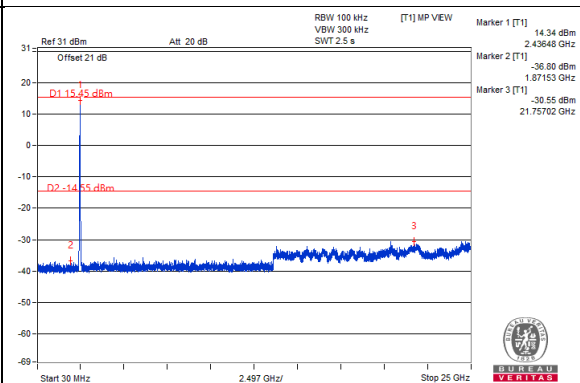


CH 11

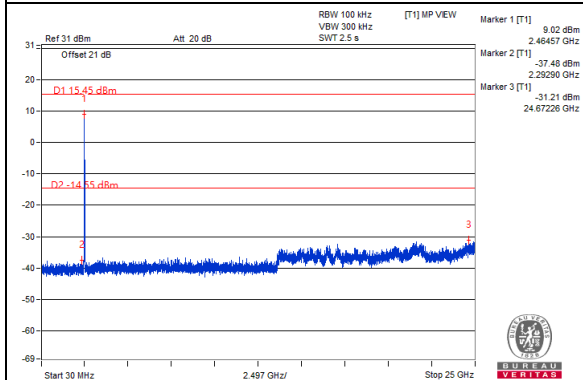


CH 1 Band edge

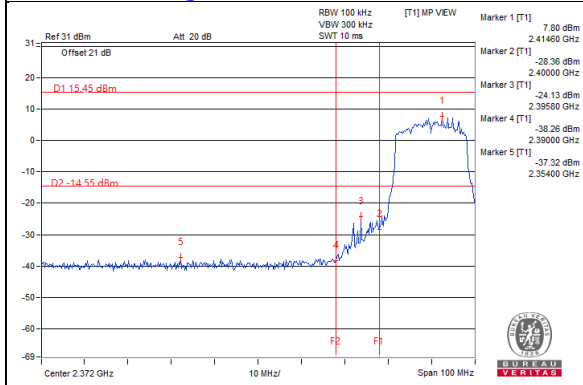




CH 11 Band edge

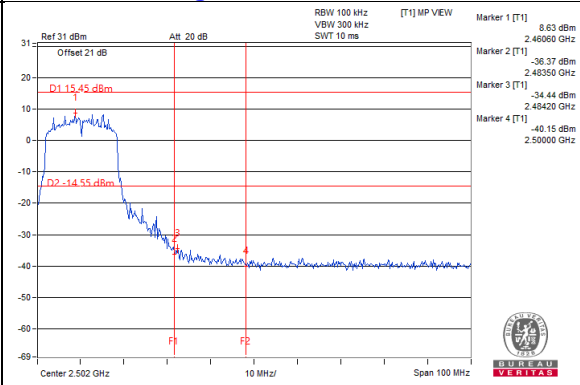

802.11ax (HE20)

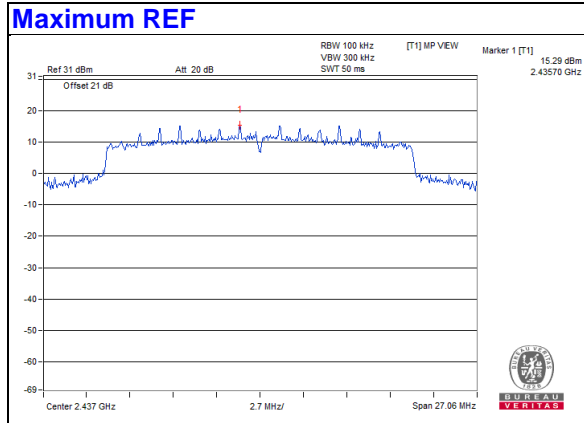


Chain 0

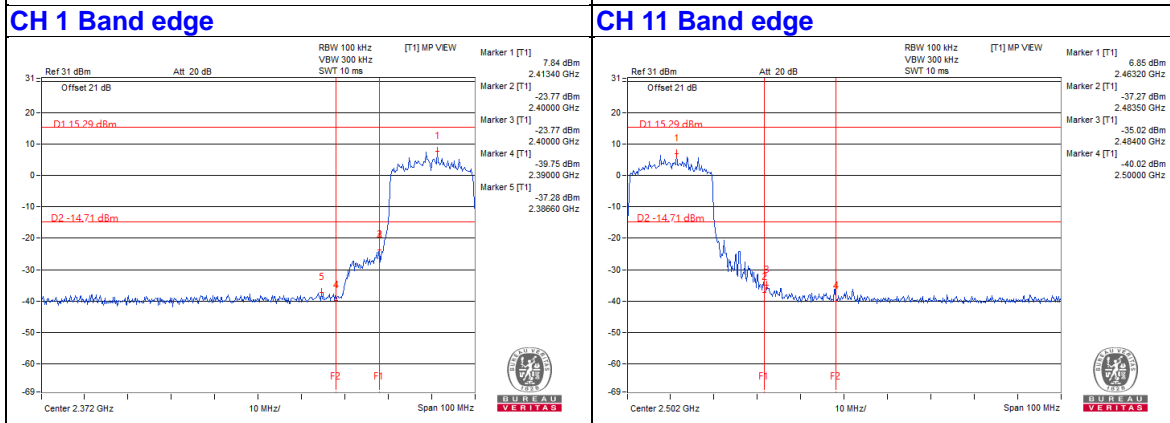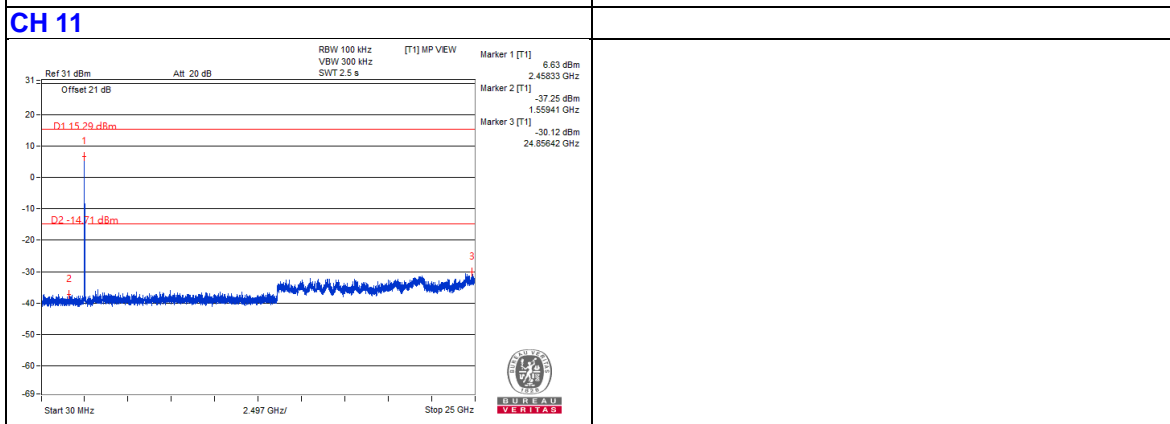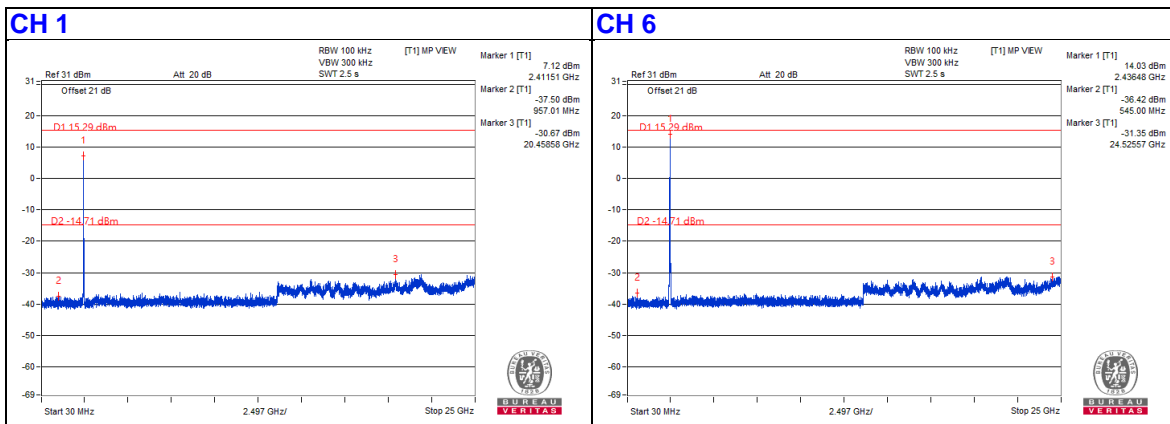


Chain 1


CH 1

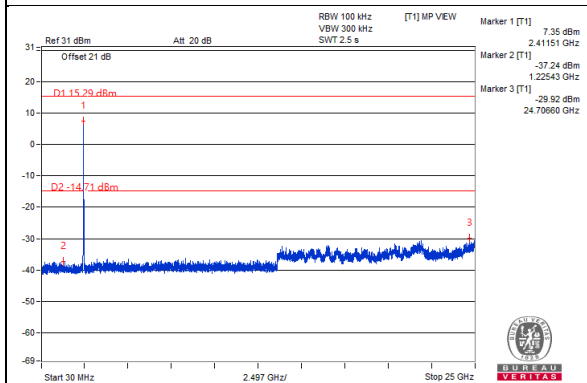


CH 6

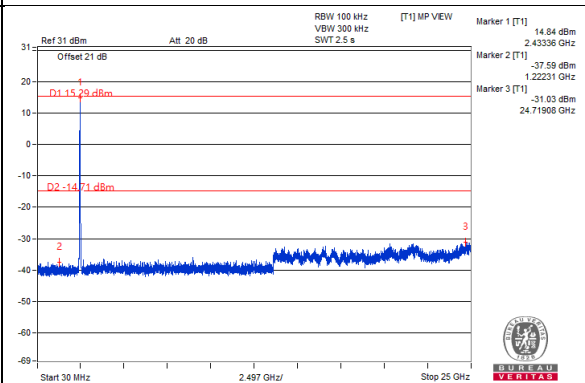


CH 11

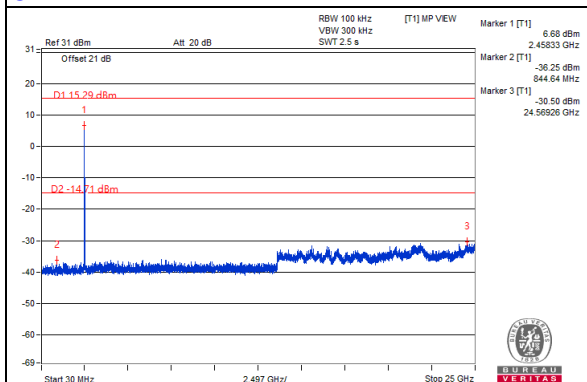

CH 1 Band edge

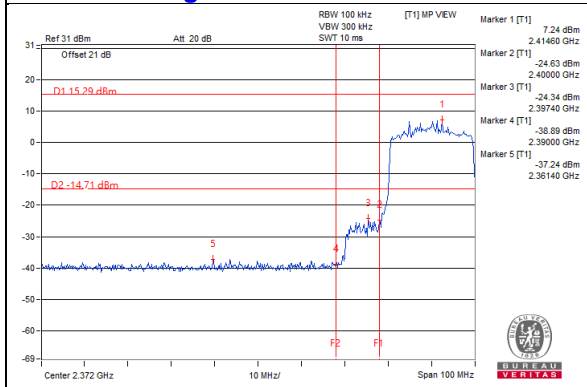


CH 11 Band edge

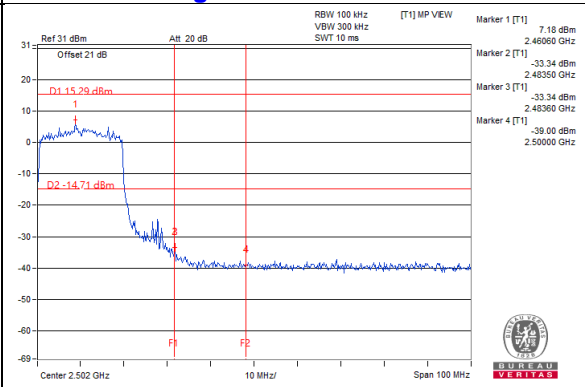


802.11ax (HE40)

Maximum REF

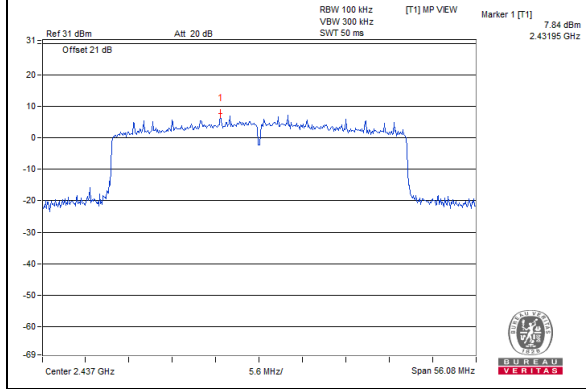


Chain 0


CH 3

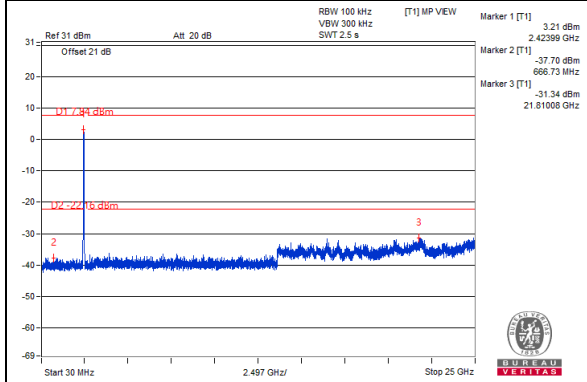


CH 6

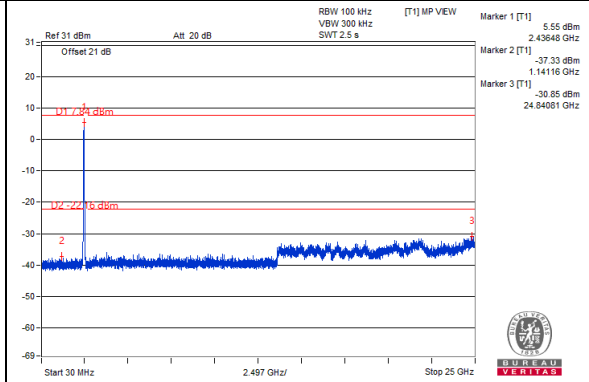


CH 9

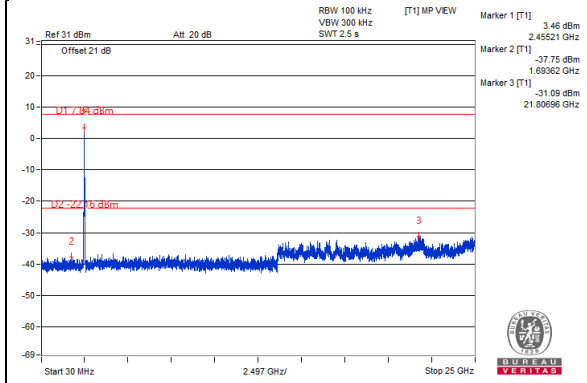

CH 3 Band edge

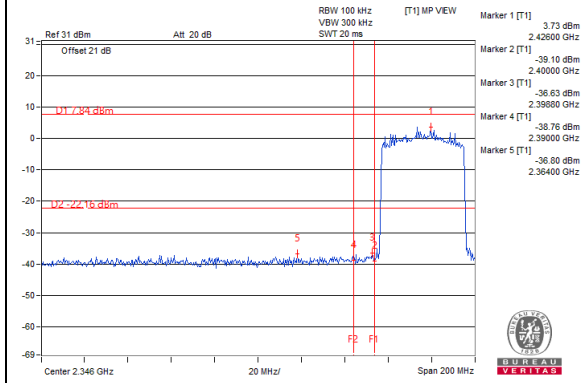


CH 9 Band edge

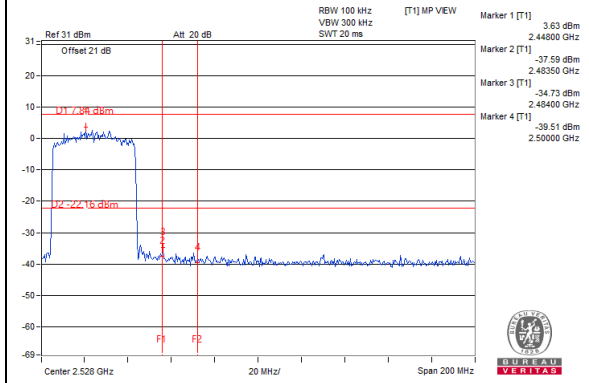


Chain 1


CH 3

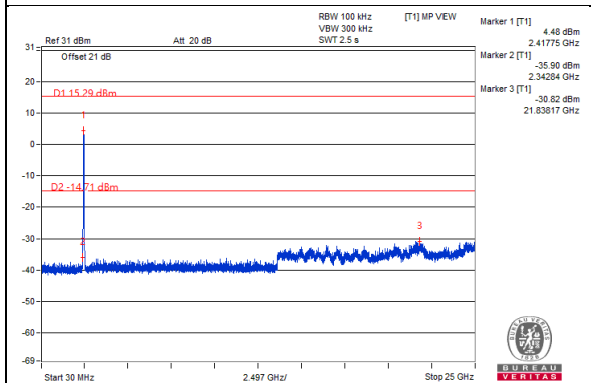


CH 6

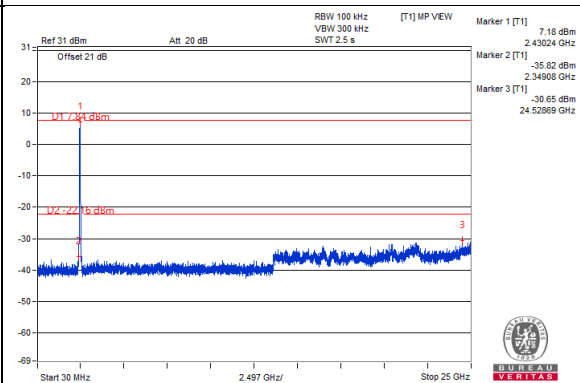


CH 9

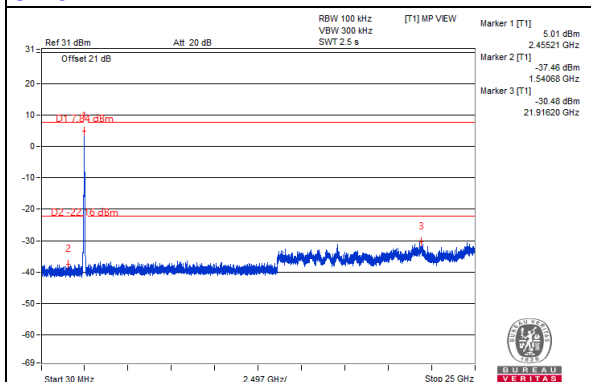

CH 3 Band edge

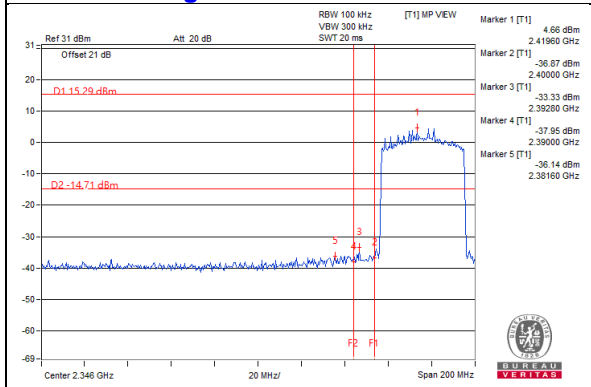

CH 9 Band edge

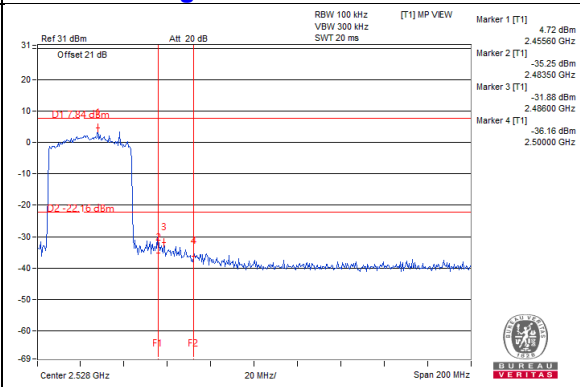


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement


802.11b

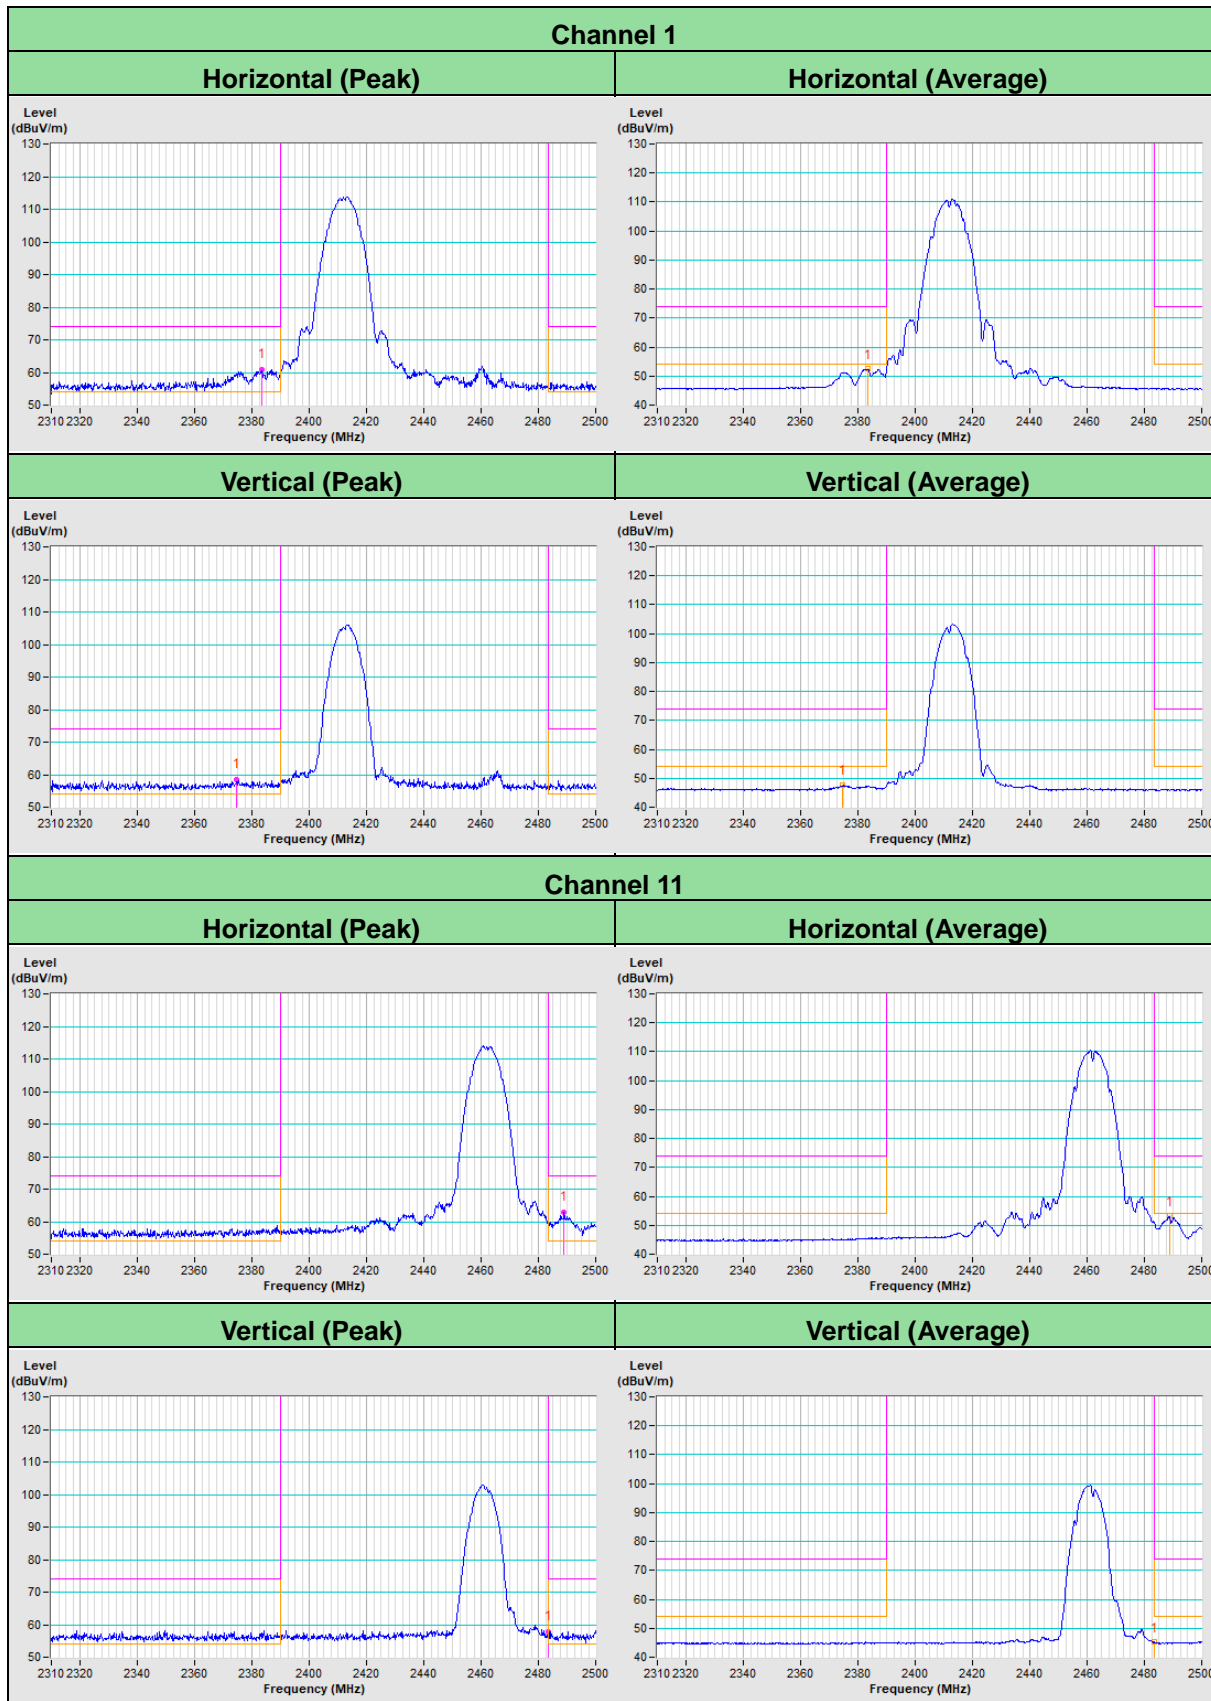


802.11g

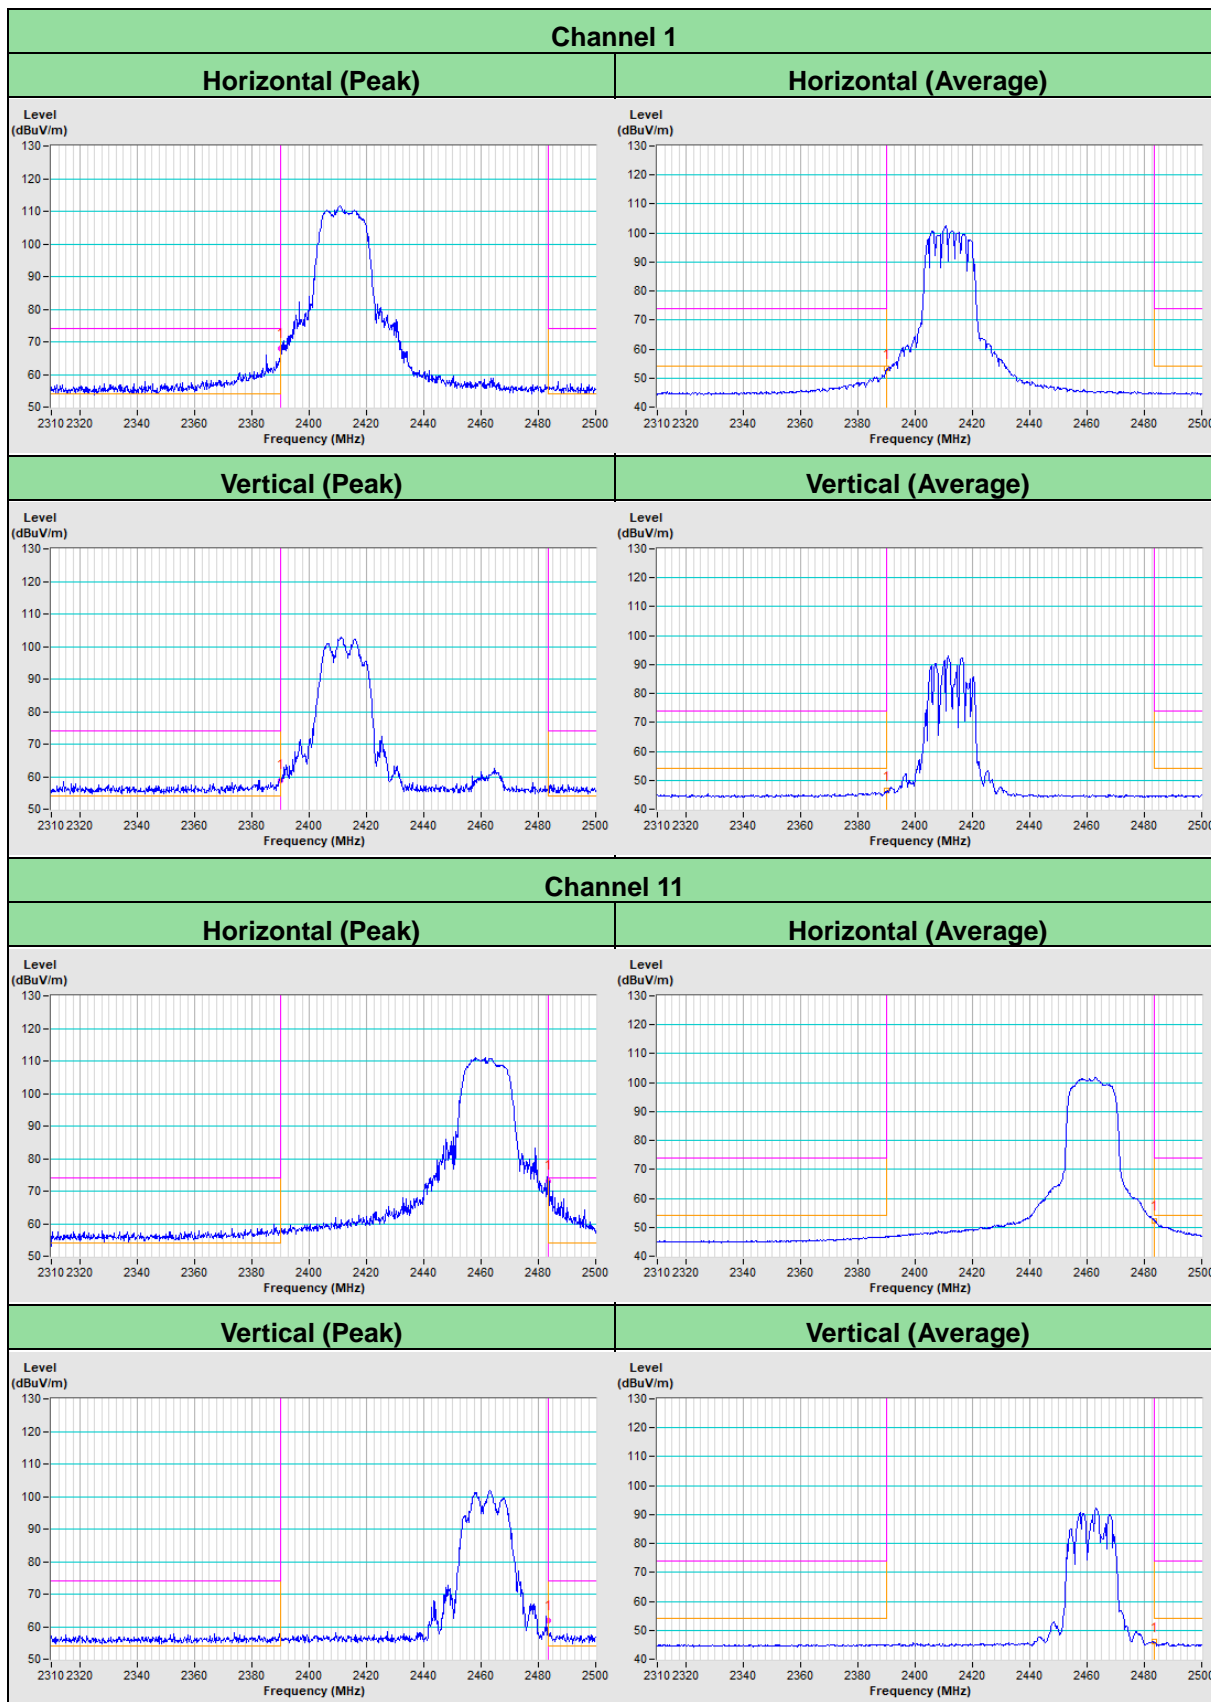

802.11ax (HE20)

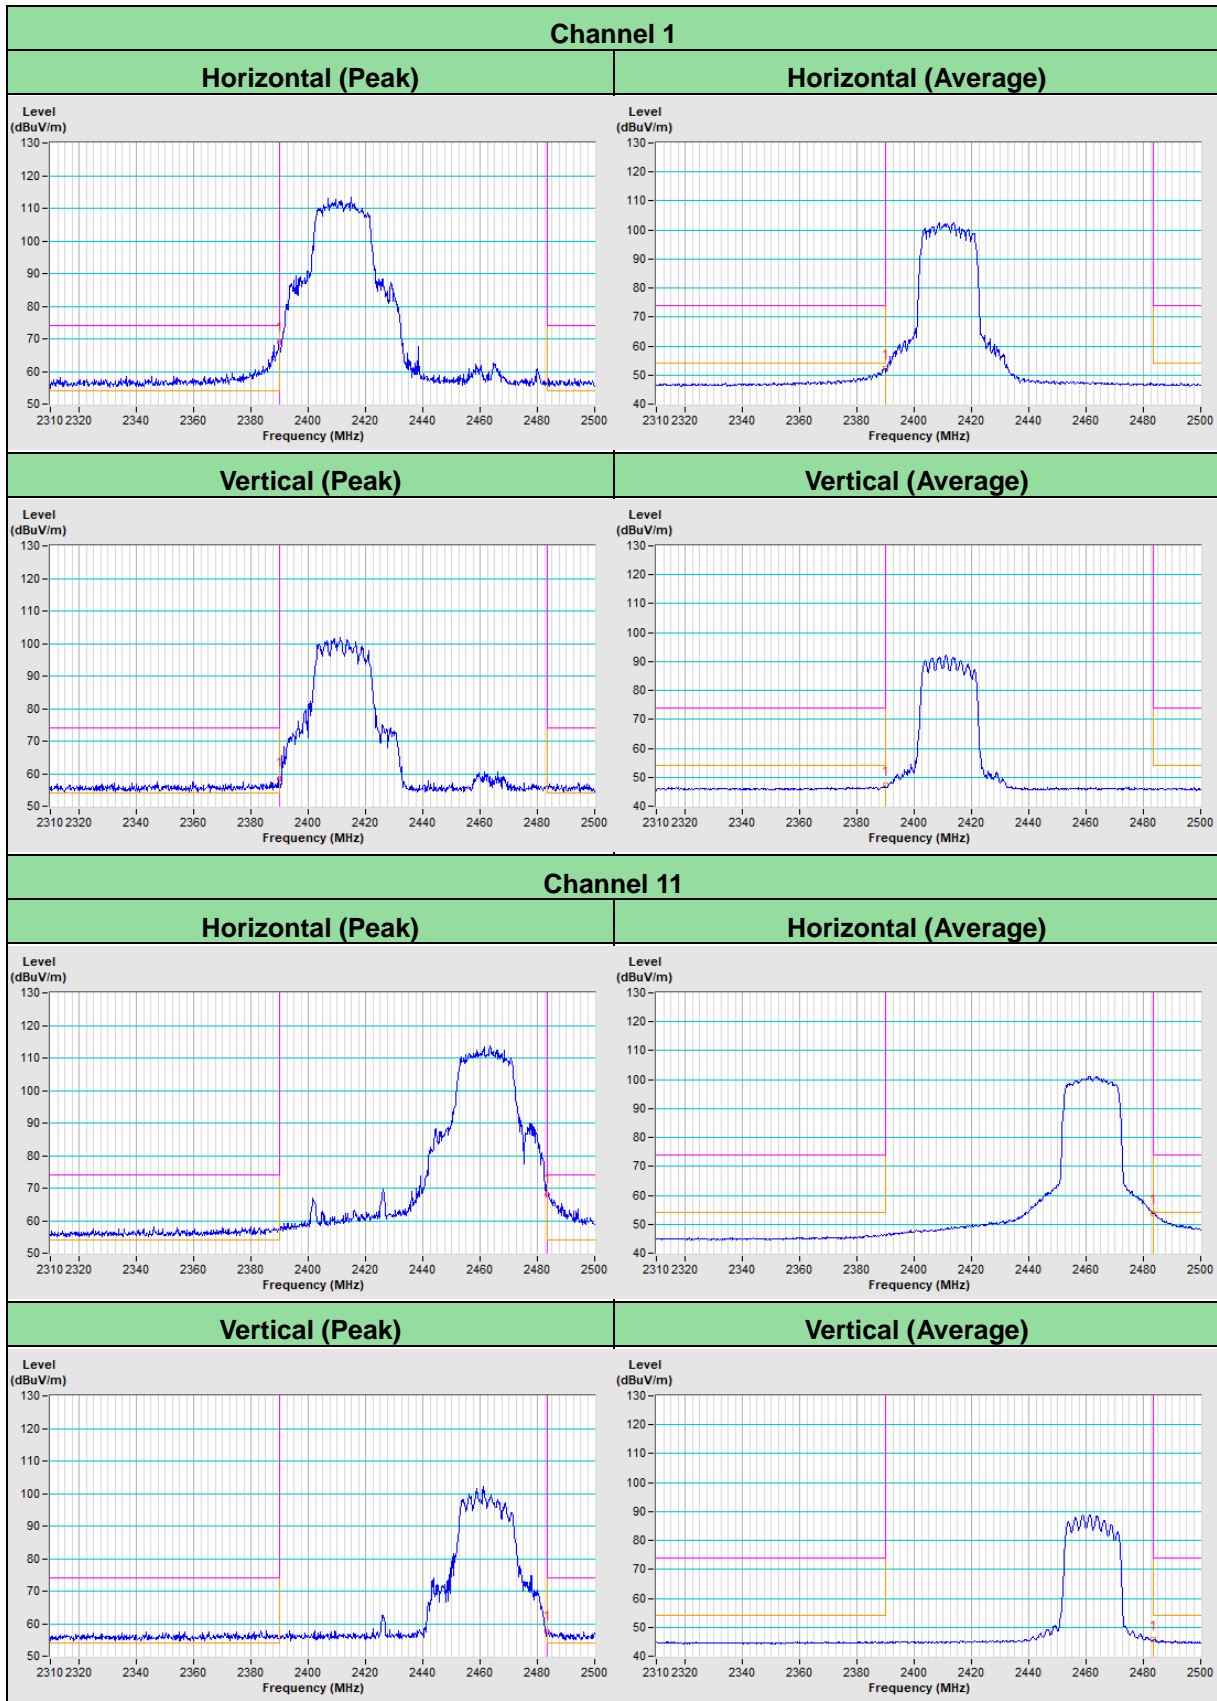

802.11ax (HE40)

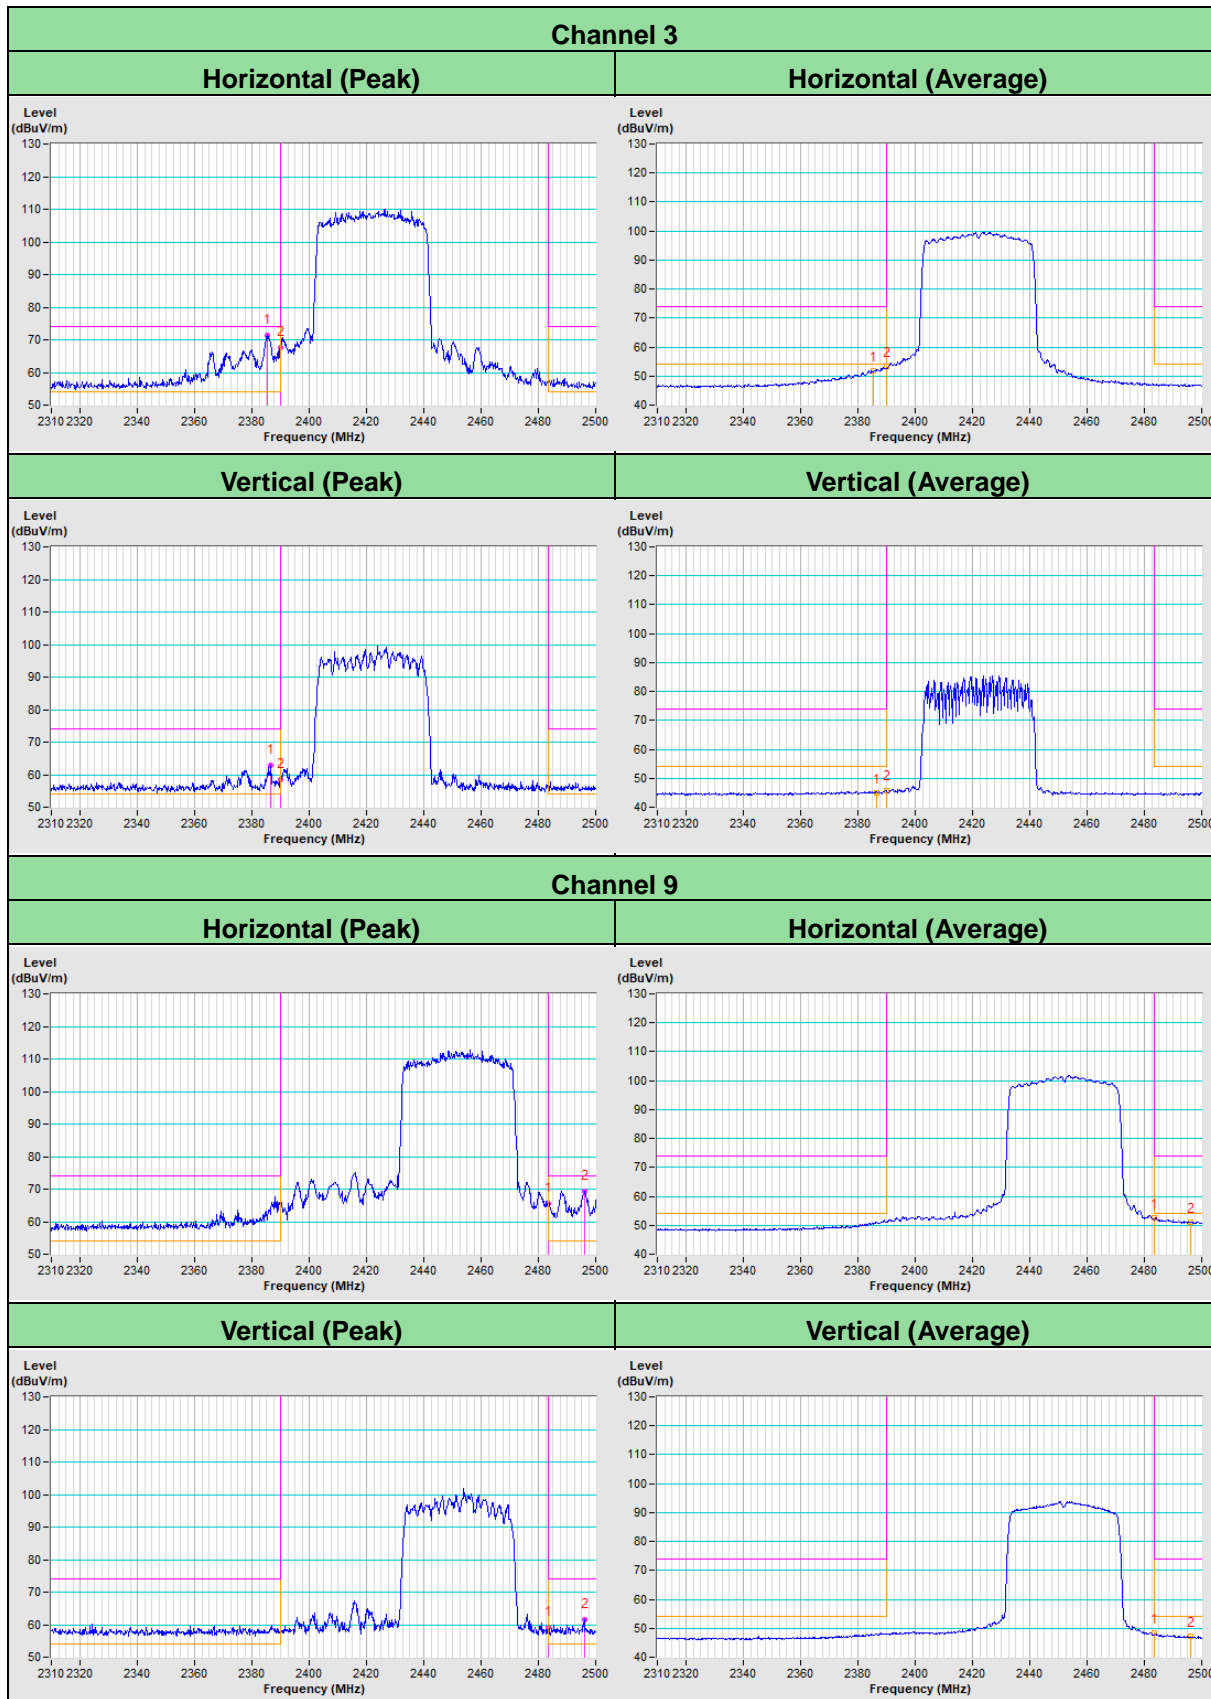

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---