




Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 3, CH102		:

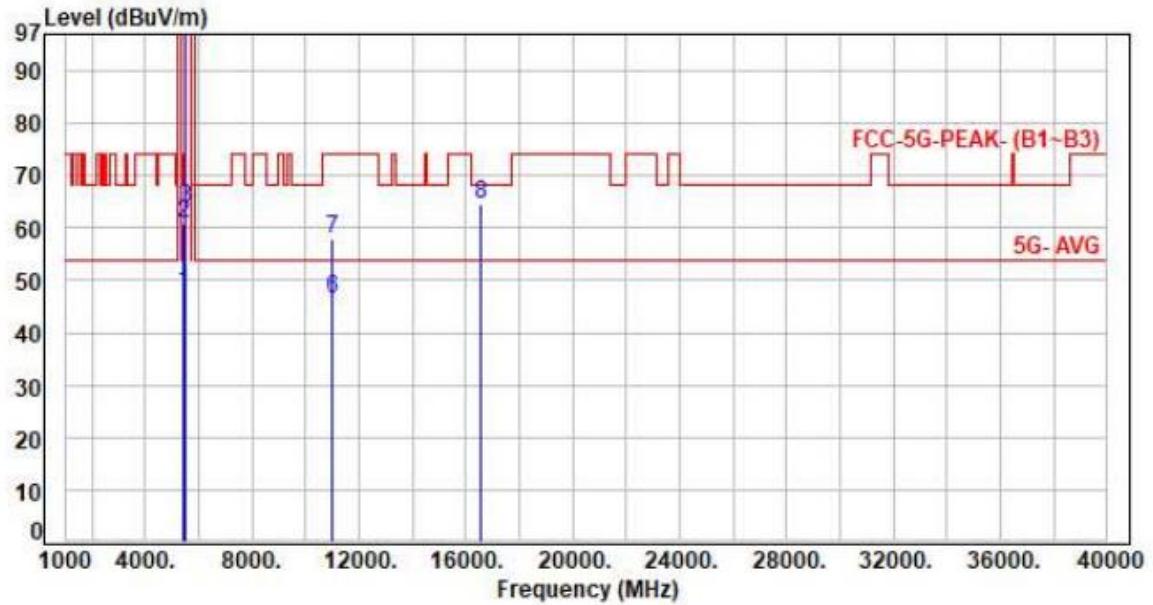


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	47.80	47.43	54.00	-6.57	Average	118	158	P
2	5460.00	-0.37	61.23	60.86	74.00	-13.14	Peak	118	158	P
3	5470.00	-0.35	64.28	63.93	68.20	-4.27	Peak	118	158	P
4	5510.00	-0.23	98.63	98.40	200.00	-101.60	Average	118	158	P
5	5510.00	-0.23	112.78	112.55	200.00	-87.45	Peak	118	158	P
6	11020.00	3.46	43.16	46.62	54.00	-7.38	Average	100	341	P
7	11020.00	3.46	54.49	57.95	74.00	-16.05	Peak	100	341	P
8	16530.00	5.08	59.58	64.66	68.20	-3.54	Peak	100	321	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3, CH102		:

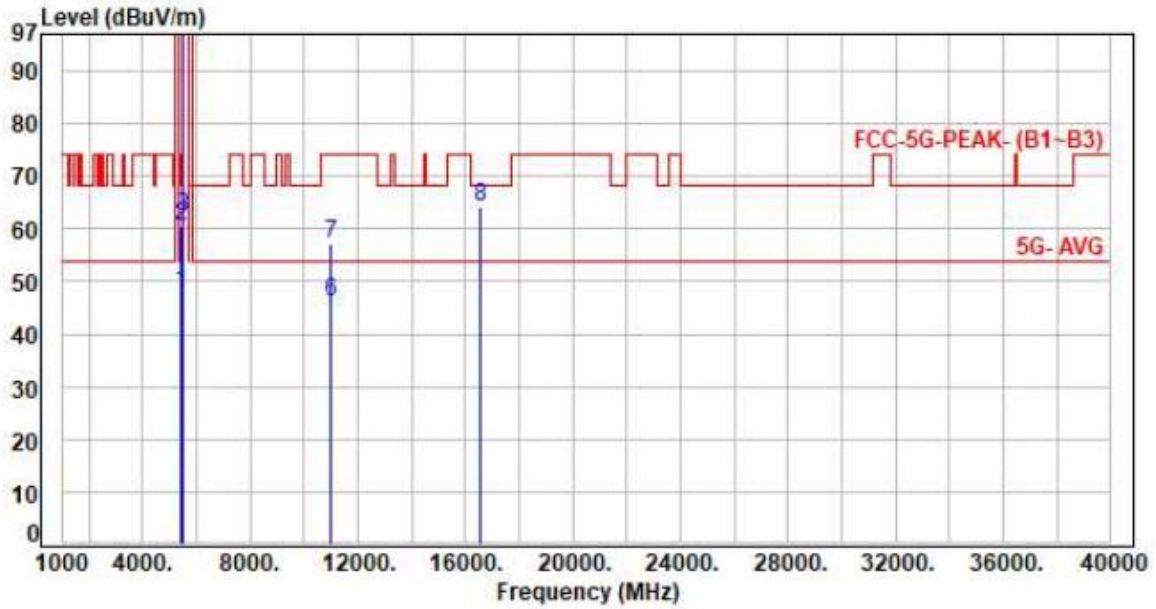


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	48.37	48.00	54.00	-6.00	Average	244	291	P
2	5460.00	-0.37	60.81	60.44	74.00	-13.56	Peak	244	291	P
3	5470.00	-0.35	62.70	62.35	68.20	-5.85	Peak	244	291	P
4	5510.00	-0.23	96.84	96.61	200.00	-103.39	Average	244	291	P
5	5510.00	-0.23	110.25	110.02	200.00	-89.98	Peak	244	291	P
6	11020.00	3.46	42.48	45.94	54.00	-8.06	Average	100	227	P
7	11020.00	3.46	53.87	57.33	74.00	-16.67	Peak	100	227	P
8	16530.00	5.08	58.94	64.02	68.20	-4.18	Peak	100	348	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 3, CH118		:

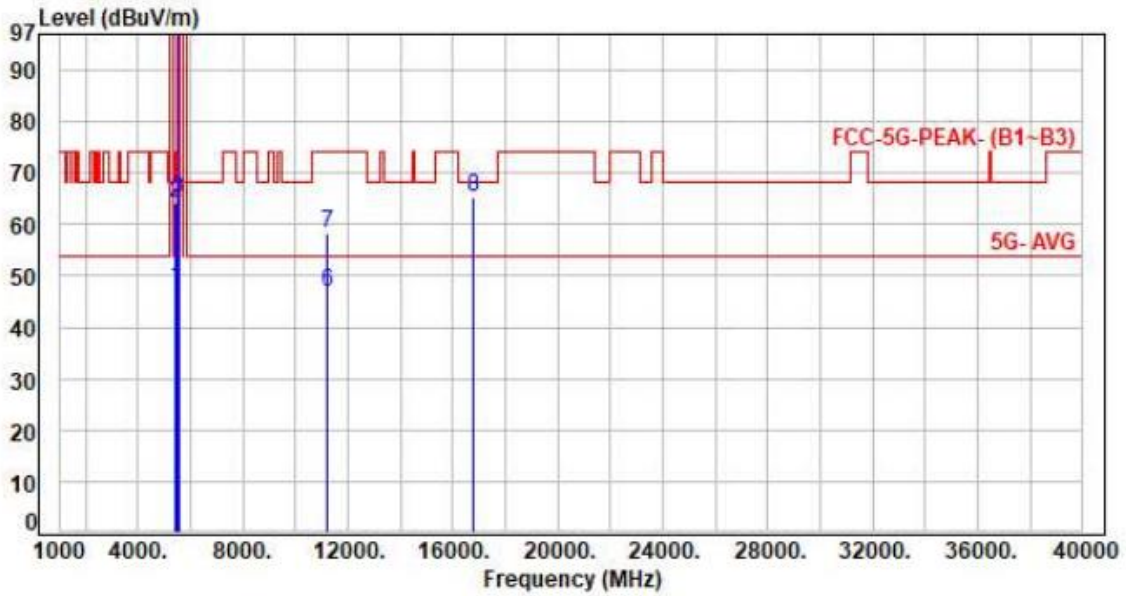


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	47.78	47.41	54.00	-6.59	Average	130	157	P
2	5460.00	-0.37	64.45	64.08	74.00	-9.92	Peak	130	157	P
3	5470.00	-0.35	65.19	64.84	68.20	-3.36	Peak	130	157	P
4	5590.00	0.17	103.80	103.97	200.00	-96.03	Average	130	157	P
5	5590.00	0.17	117.30	117.47	200.00	-82.53	Peak	130	157	P
6	11180.00	3.74	42.96	46.70	54.00	-7.30	Average	100	343	P
7	11180.00	3.74	54.62	58.36	74.00	-15.64	Peak	100	343	P
8	16770.00	4.42	60.84	65.26	68.20	-2.94	Peak	100	323	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3, CH118		:

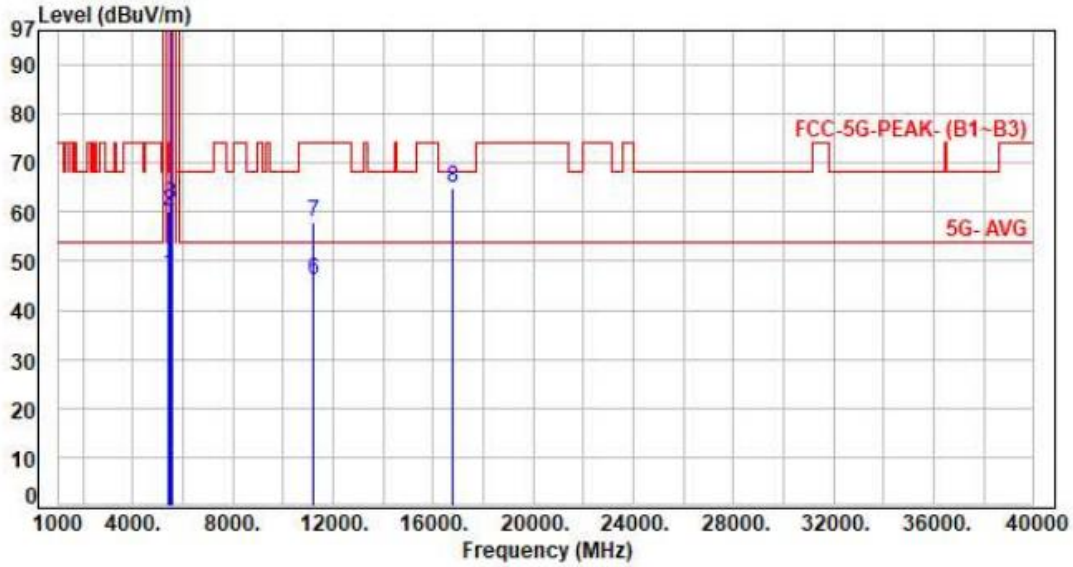


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	47.45	47.08	54.00	-6.92	Average	240	291	P
2	5460.00	-0.37	60.66	60.29	74.00	-13.71	Peak	240	291	P
3	5470.00	-0.35	62.07	61.72	68.20	-6.48	Peak	240	291	P
4	5590.00	0.17	102.90	103.07	200.00	-96.93	Average	240	291	P
5	5590.00	0.17	116.01	116.18	200.00	-83.82	Peak	240	291	P
6	11180.00	3.74	42.24	45.98	54.00	-8.02	Average	100	225	P
7	11180.00	3.74	54.17	57.91	74.00	-16.09	Peak	100	225	P
8	16770.00	4.42	60.46	64.88	68.20	-3.32	Peak	100	341	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 3, CH134		:

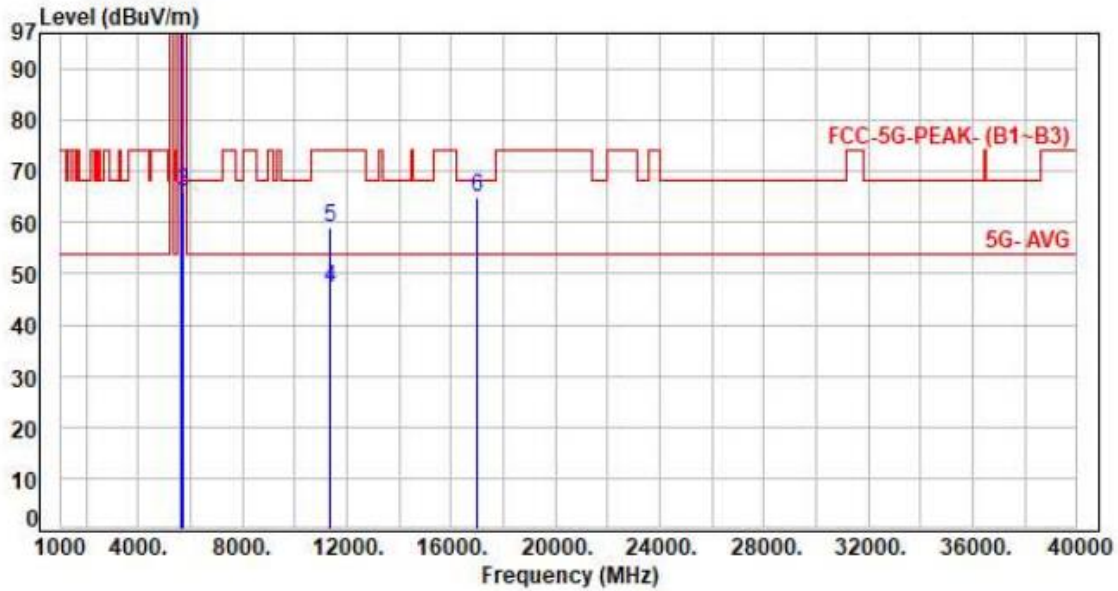


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	0.58	100.03	100.61	200.00	-99.39	Average	121	155	P
2	5670.00	0.58	112.66	113.24	200.00	-86.76	Peak	121	155	P
3	5725.00	0.76	65.39	66.15	68.20	-2.05	Peak	121	155	P
4	11340.00	3.83	43.42	47.25	54.00	-6.75	Average	100	336	P
5	11340.00	3.83	55.22	59.05	74.00	-14.95	Peak	100	336	P
6	17010.00	4.17	60.68	64.85	68.20	-3.35	Peak	100	327	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3, CH134		:

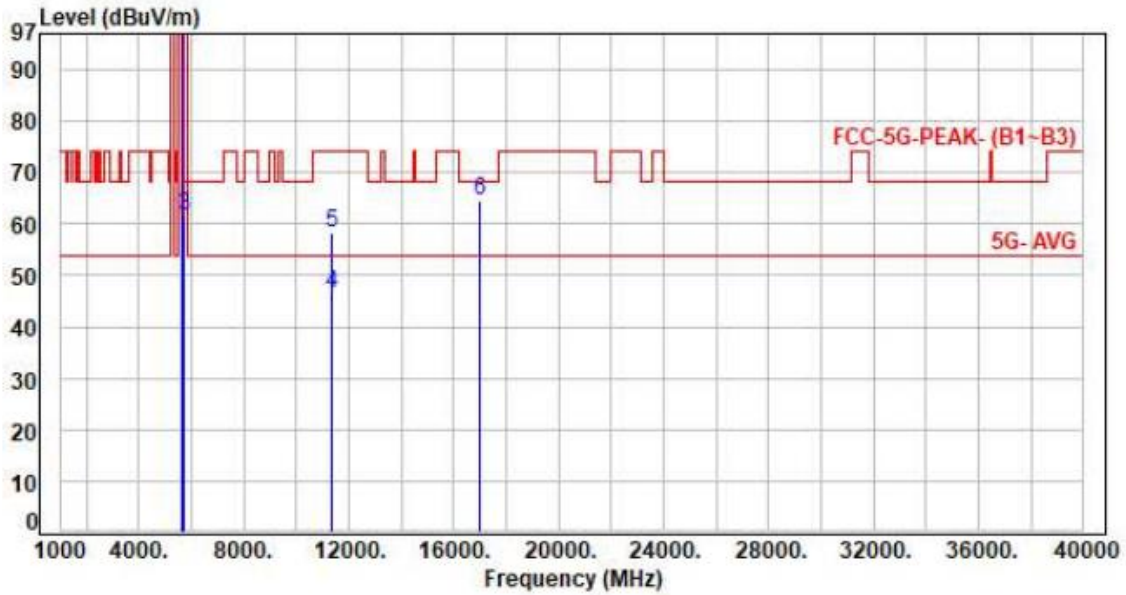


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	0.58	97.57	98.15	200.00	-101.85	Average	190	294	P
2	5670.00	0.58	110.17	110.75	200.00	-89.25	Peak	190	294	P
3	5725.00	0.76	60.68	61.44	68.20	-6.76	Peak	190	294	P
4	11340.00	3.83	42.51	46.34	54.00	-7.66	Average	100	223	P
5	11340.00	3.83	54.61	58.44	74.00	-15.56	Peak	100	223	P
6	17010.00	4.17	60.20	64.37	68.20	-3.83	Peak	100	348	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3, CH106		:

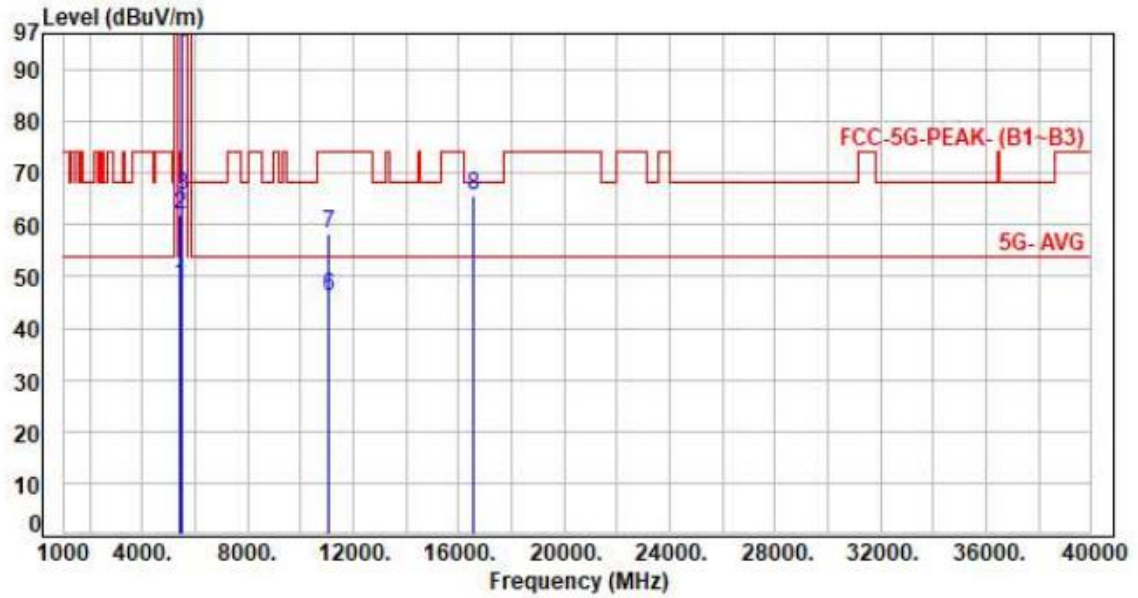


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	48.85	48.48	54.00	-5.52	Average	135	158	P
2	5460.00	-0.37	62.24	61.87	74.00	-12.13	Peak	135	158	P
3	5470.00	-0.35	66.07	65.72	68.20	-2.48	Peak	135	158	P
4	5530.00	-0.12	95.11	94.99	200.00	-105.01	Average	135	158	P
5	5530.00	-0.12	108.22	108.10	200.00	-91.90	Peak	135	158	P
6	11060.00	3.52	42.62	46.14	54.00	-7.86	Average	100	339	P
7	11060.00	3.52	54.61	58.13	74.00	-15.87	Peak	100	339	P
8	16590.00	4.91	60.63	65.54	68.20	-2.66	Peak	100	324	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3, CH106		:

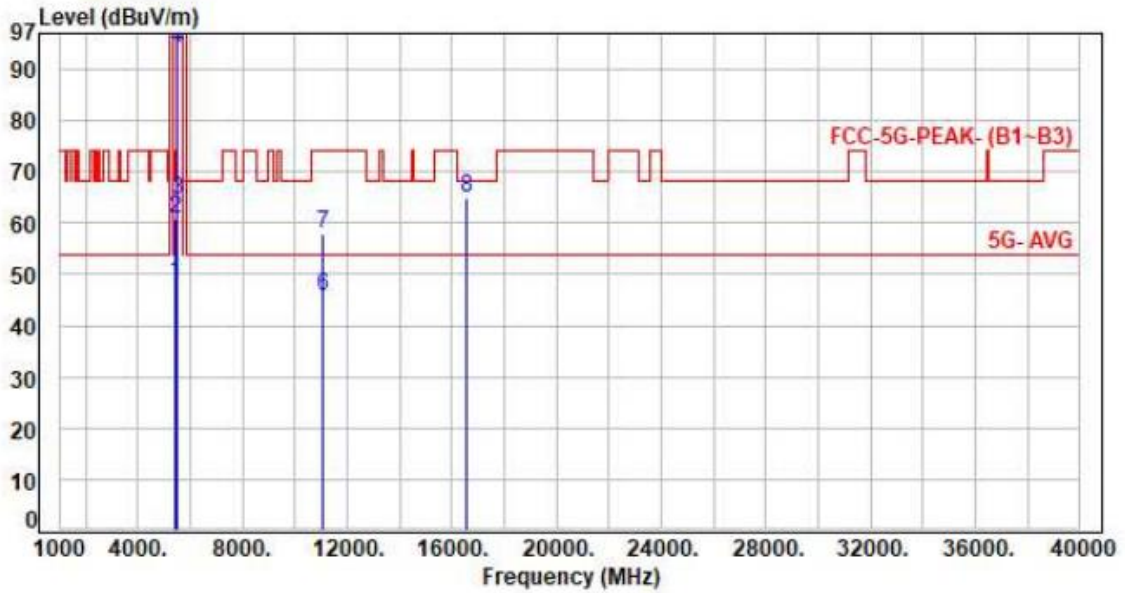


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	48.69	48.32	54.00	-5.68	Average	196	294	P
2	5460.00	-0.37	61.39	61.02	74.00	-12.98	Peak	196	294	P
3	5470.00	-0.35	64.74	64.39	68.20	-3.81	Peak	196	294	P
4	5530.00	-0.12	94.26	94.14	200.00	-105.86	Average	196	294	P
5	5530.00	-0.12	107.38	107.26	200.00	-92.74	Peak	196	294	P
6	11060.00	3.52	42.18	45.70	54.00	-8.30	Average	100	219	P
7	11060.00	3.52	54.40	57.92	74.00	-16.08	Peak	100	219	P
8	16590.00	4.91	60.16	65.07	68.20	-3.13	Peak	100	347	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3, CH122		:

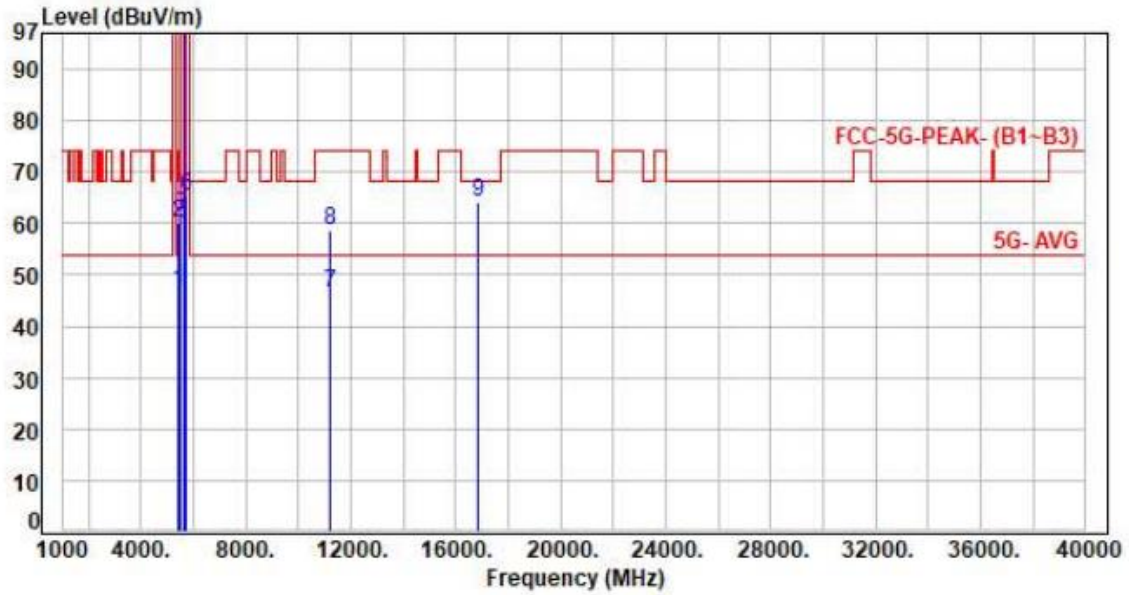


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	47.10	46.73	54.00	-7.27	Average	142	154	P
2	5460.00	-0.37	60.65	60.28	74.00	-13.72	Peak	142	154	P
3	5470.00	-0.35	61.93	61.58	68.20	-6.62	Peak	142	154	P
4	5610.00	0.27	103.69	103.96	200.00	-96.04	Average	142	154	P
5	5610.00	0.27	116.11	116.38	200.00	-83.62	Peak	142	154	P
6	5725.00	0.76	64.46	65.22	68.20	-2.98	Peak	142	154	P
7	11220.00	3.78	42.76	46.54	54.00	-7.46	Average	100	346	P
8	11220.00	3.78	54.84	58.62	74.00	-15.38	Peak	100	346	P
9	16830.00	4.57	59.47	64.04	68.20	-4.16	Peak	100	325	P

Note: Level=Reading+Factor
 Margin=Level-limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3, CH122		:

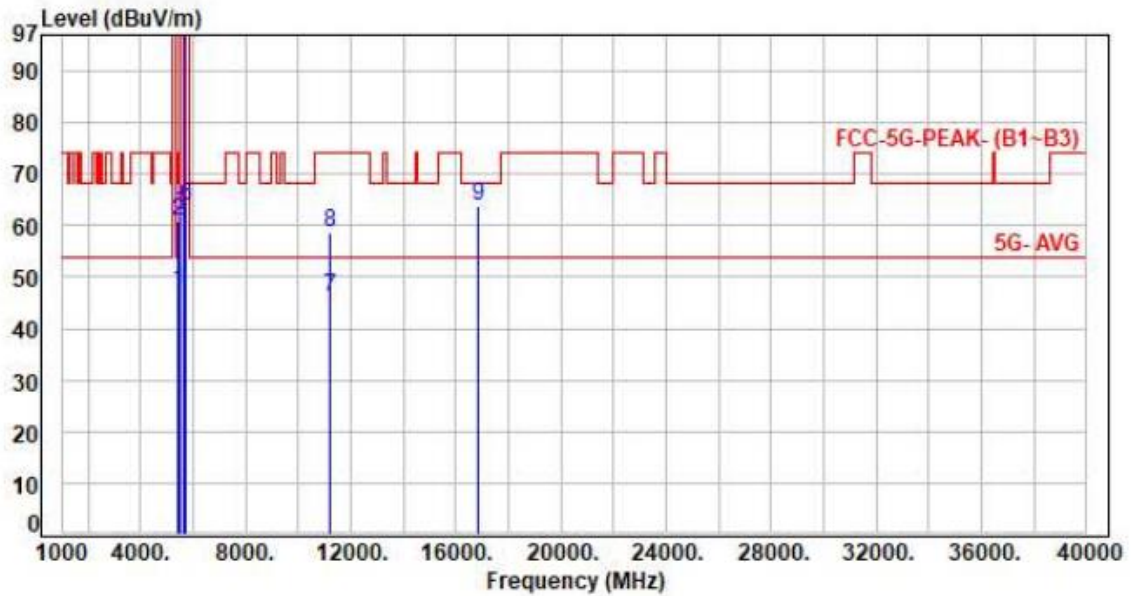


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	47.40	47.03	54.00	-6.97	Average	222	293	P
2	5460.00	-0.37	61.14	60.77	74.00	-13.23	Peak	222	293	P
3	5470.00	-0.35	62.25	61.90	68.20	-6.30	Peak	222	293	P
4	5610.00	0.27	96.45	96.72	200.00	-103.28	Average	222	293	P
5	5610.00	0.27	109.20	109.47	200.00	-90.53	Peak	222	293	P
6	5725.00	0.76	63.08	63.84	68.20	-4.36	Peak	222	293	P
7	11220.00	3.78	42.34	46.12	54.00	-7.88	Average	100	222	P
8	11220.00	3.78	54.74	58.52	74.00	-15.48	Peak	100	222	P
9	16830.00	4.57	59.27	63.84	68.20	-4.36	Peak	100	351	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3, CH114		:

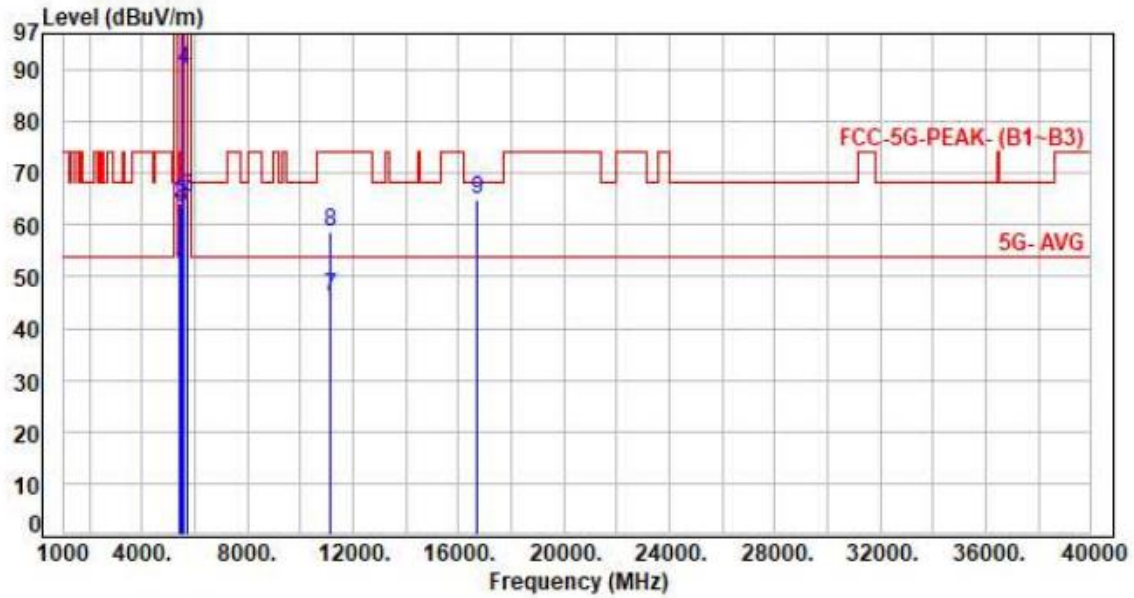


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	51.35	50.98	54.00	-3.02	Average	100	158	P
2	5460.00	-0.37	64.59	64.22	74.00	-9.78	Peak	100	158	P
3	5470.00	-0.35	63.85	63.50	68.20	-4.70	Peak	100	158	P
4	5570.00	0.09	89.84	89.93	200.00	-110.07	Average	100	158	P
5	5570.00	0.09	102.42	102.51	200.00	-97.49	Peak	100	158	P
6	5725.00	0.76	64.38	65.14	68.20	-3.06	Peak	100	158	P
7	11140.00	3.69	42.49	46.18	54.00	-7.82	Average	100	341	P
8	11140.00	3.69	55.13	58.82	74.00	-15.18	Peak	100	341	P
9	16710.00	4.42	60.56	64.98	68.20	-3.22	Peak	100	324	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 3, CH114		:

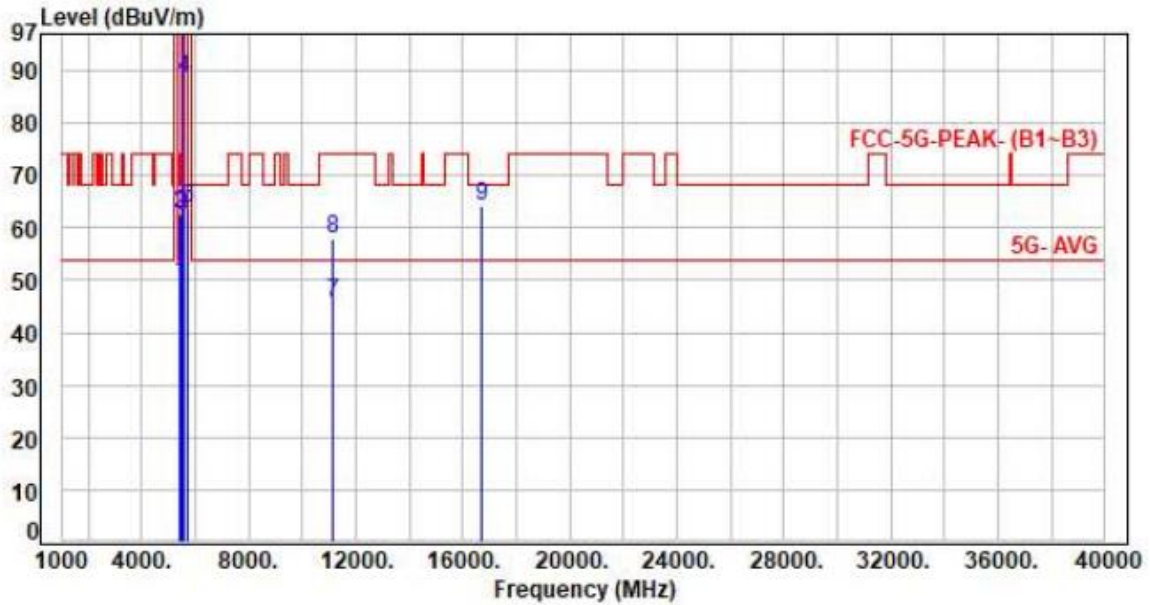


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	49.87	49.50	54.00	-4.50	Average	201	292	P
2	5460.00	-0.37	63.00	62.63	74.00	-11.37	Peak	201	292	P
3	5470.00	-0.35	62.75	62.40	68.20	-5.80	Peak	201	292	P
4	5570.00	0.09	88.27	88.36	200.00	-111.64	Average	201	292	P
5	5570.00	0.09	100.79	100.88	200.00	-99.12	Peak	201	292	P
6	5725.00	0.76	63.04	63.80	68.20	-4.40	Peak	201	292	P
7	11140.00	3.69	42.14	45.83	54.00	-8.17	Average	100	227	P
8	11140.00	3.69	54.28	57.97	74.00	-16.03	Peak	100	227	P
9	16710.00	4.42	59.88	64.30	68.20	-3.90	Peak	100	348	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 3 Straddle Channel, CH144		:

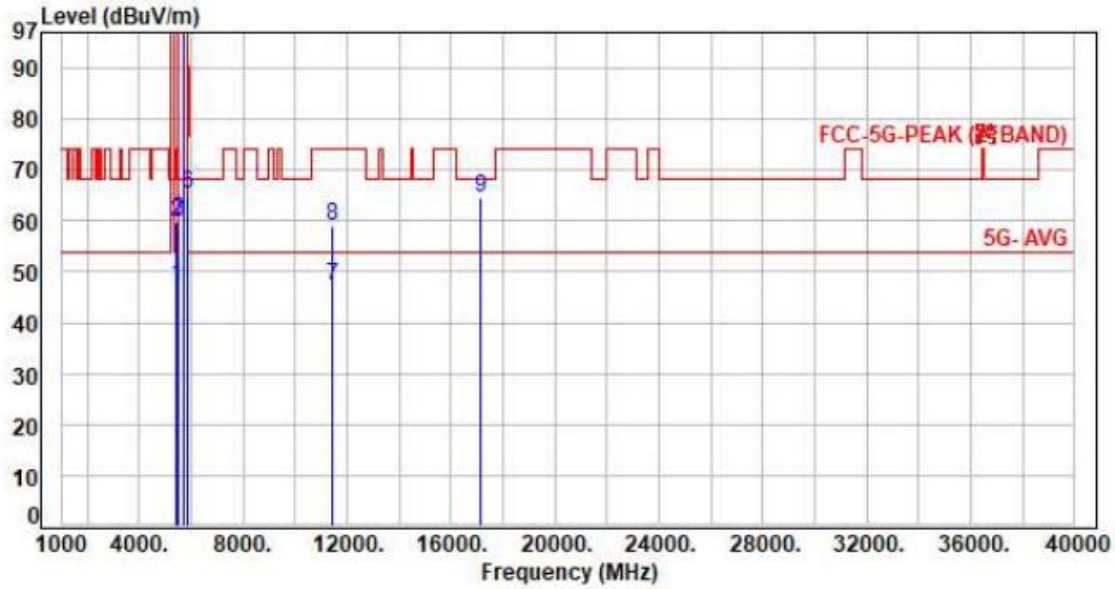


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	47.51	47.14	54.00	-6.86	Average	134	139	P
2	5460.00	-0.37	60.24	59.87	74.00	-14.13	Peak	134	139	P
3	5470.00	-0.35	60.58	60.23	68.20	-7.97	Peak	134	139	P
4	5720.00	0.74	109.79	110.53	200.00	-89.47	Average	134	139	P
5	5720.00	0.74	119.45	120.19	200.00	-79.81	Peak	134	139	P
6	5850.00	0.80	64.37	65.17	68.20	-3.03	Peak	134	139	P
7	11440.00	3.95	43.28	47.23	54.00	-6.77	Average	100	345	P
8	11440.00	3.95	55.17	59.12	74.00	-14.88	Peak	100	345	P
9	17160.00	3.68	60.88	64.56	68.20	-3.64	Peak	100	326	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 3 Straddle Channel, CH144		:

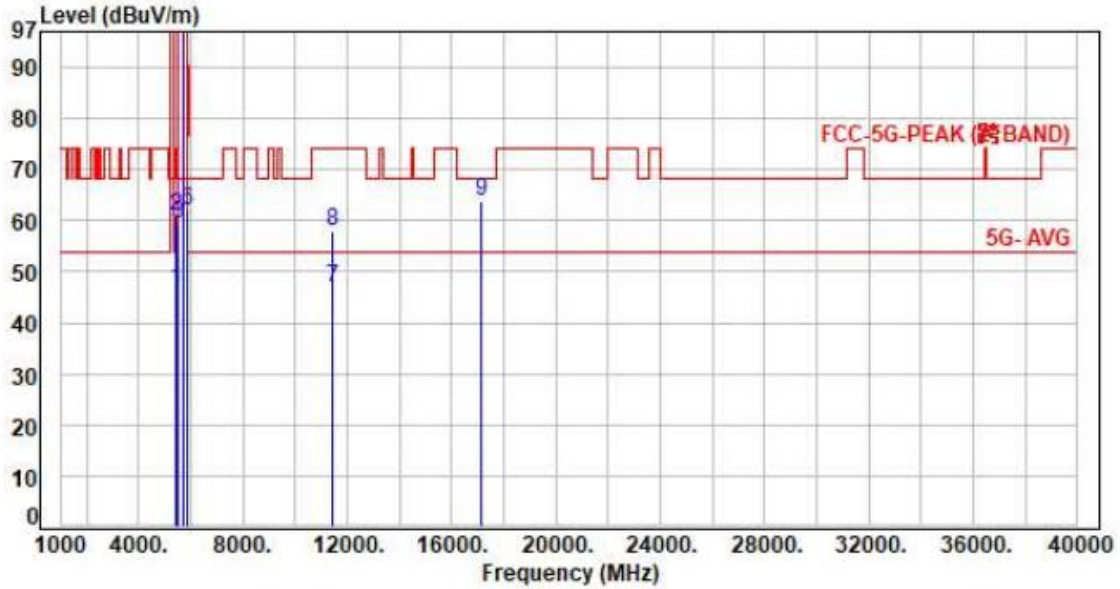


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	46.69	46.32	54.00	-7.68	Average	183	299	P
2	5460.00	-0.37	61.39	61.02	74.00	-12.98	Peak	183	299	P
3	5470.00	-0.35	59.82	59.47	68.20	-8.73	Peak	183	299	P
4	5720.00	0.74	108.82	109.56	200.00	-90.44	Average	183	299	P
5	5720.00	0.74	118.18	118.92	200.00	-81.08	Peak	183	299	P
6	5850.00	0.80	61.31	62.11	68.20	-6.09	Peak	183	299	P
7	11440.00	3.95	42.74	46.69	54.00	-7.31	Average	100	219	P
8	11440.00	3.95	53.87	57.82	74.00	-16.18	Peak	100	219	P
9	17160.00	3.68	60.23	63.91	68.20	-4.29	Peak	100	344	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 3 Straddle Channel, CH144		

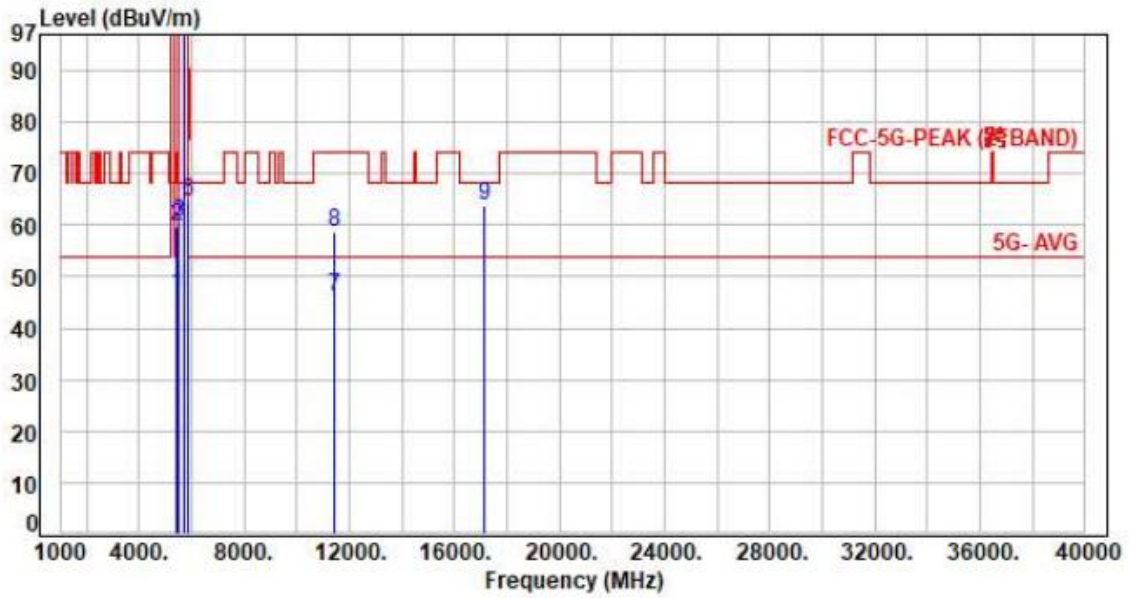


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	46.74	46.37	54.00	-7.63	Average	100	155	P
2	5460.00	-0.37	60.12	59.75	74.00	-14.25	Peak	100	155	P
3	5470.00	-0.35	60.89	60.54	68.20	-7.66	Peak	100	155	P
4	5720.00	0.74	108.51	109.25	200.00	-90.75	Average	100	155	P
5	5720.00	0.74	120.35	121.09	200.00	-78.91	Peak	100	155	P
6	5850.00	0.80	63.85	64.65	68.20	-3.55	Peak	100	155	P
7	11440.00	3.95	42.08	46.03	54.00	-7.97	Average	100	344	P
8	11440.00	3.95	54.58	58.53	74.00	-15.47	Peak	100	344	P
9	17160.00	3.68	60.29	63.97	68.20	-4.23	Peak	100	322	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 3 Straddle Channel, CH144		:

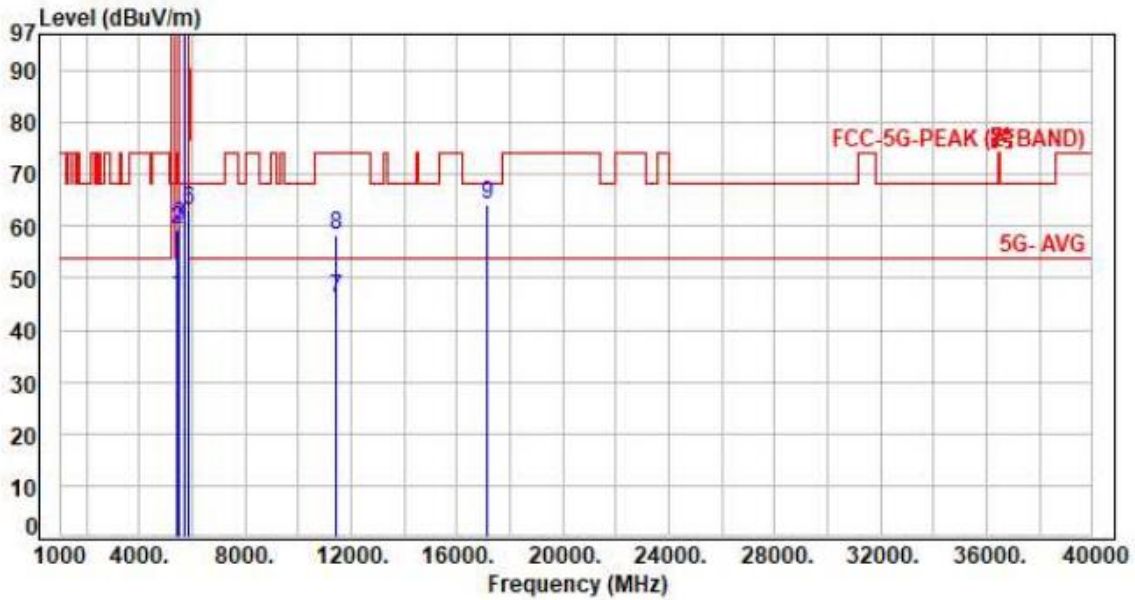

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	46.68	46.31	54.00	-7.69	Average	203	301	P
2	5460.00	-0.37	59.75	59.38	74.00	-14.62	Peak	203	301	P
3	5470.00	-0.35	60.39	60.04	68.20	-8.16	Peak	203	301	P
4	5720.00	0.74	107.04	107.78	200.00	-92.22	Average	203	301	P
5	5720.00	0.74	119.72	120.46	200.00	-79.54	Peak	203	301	P
6	5850.00	0.80	62.24	63.04	68.20	-5.16	Peak	203	301	P
7	11440.00	3.95	42.21	46.16	54.00	-7.84	Average	100	220	P
8	11440.00	3.95	54.28	58.23	74.00	-15.77	Peak	100	220	P
9	17160.00	3.68	60.55	64.23	68.20	-3.97	Peak	100	345	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 3 Straddle Channel, CH142		:

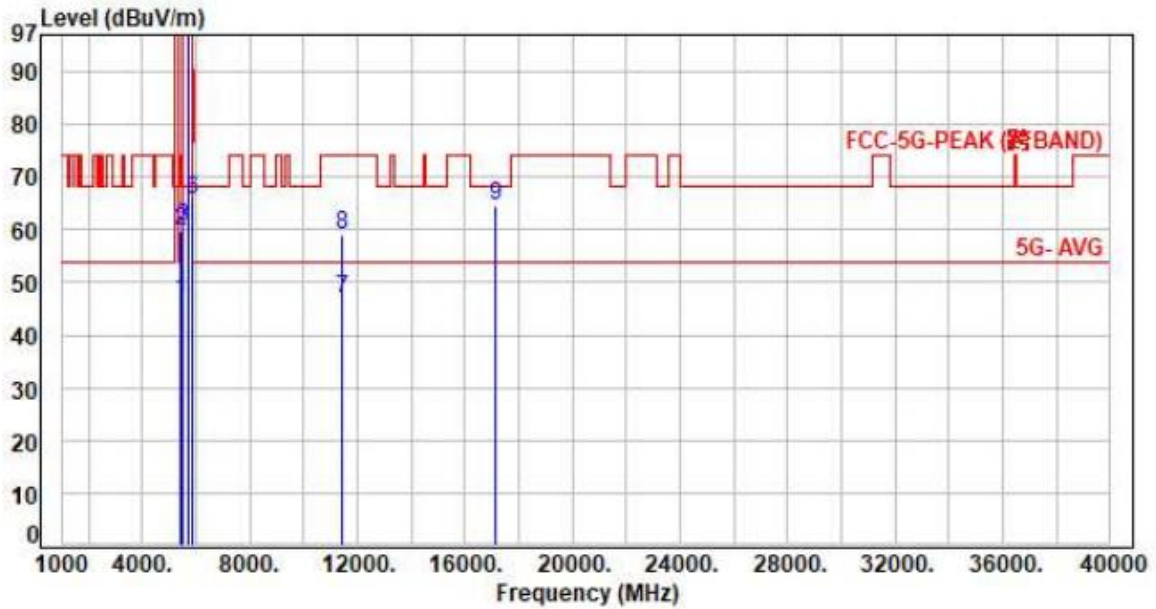


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	46.83	46.46	54.00	-7.54	Average	175	154	P
2	5460.00	-0.37	60.20	59.83	74.00	-14.17	Peak	175	154	P
3	5470.00	-0.35	61.01	60.66	68.20	-7.54	Peak	175	154	P
4	5710.00	0.72	102.73	103.45	200.00	-96.55	Average	175	154	P
5	5710.00	0.72	114.94	115.66	200.00	-84.34	Peak	175	154	P
6	5850.00	0.80	64.81	65.61	68.20	-2.59	Peak	175	154	P
7	11420.00	3.96	42.85	46.81	54.00	-7.19	Average	100	336	P
8	11420.00	3.96	55.17	59.13	74.00	-14.87	Peak	100	336	P
9	17130.00	3.71	60.85	64.56	68.20	-3.64	Peak	100	327	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 3 Straddle Channel, CH142		:

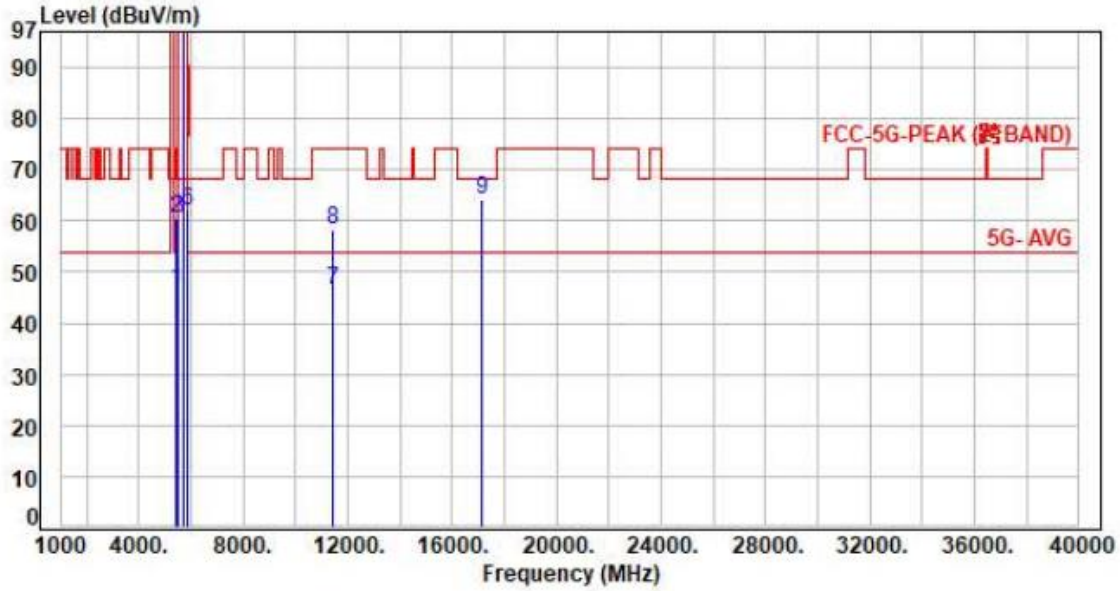


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	46.71	46.34	54.00	-7.66	Average	214	295	P
2	5460.00	-0.37	60.81	60.44	74.00	-13.56	Peak	214	295	P
3	5470.00	-0.35	60.82	60.47	68.20	-7.73	Peak	214	295	P
4	5710.00	0.72	101.73	102.45	200.00	-97.55	Average	214	295	P
5	5710.00	0.72	114.47	115.19	200.00	-84.81	Peak	214	295	P
6	5850.00	0.80	61.08	61.88	68.20	-6.32	Peak	214	295	P
7	11420.00	3.96	42.37	46.33	54.00	-7.67	Average	100	224	P
8	11420.00	3.96	54.40	58.36	74.00	-15.64	Peak	100	224	P
9	17130.00	3.71	60.41	64.12	68.20	-4.08	Peak	100	349	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 3 Straddle Channel, CH138		:

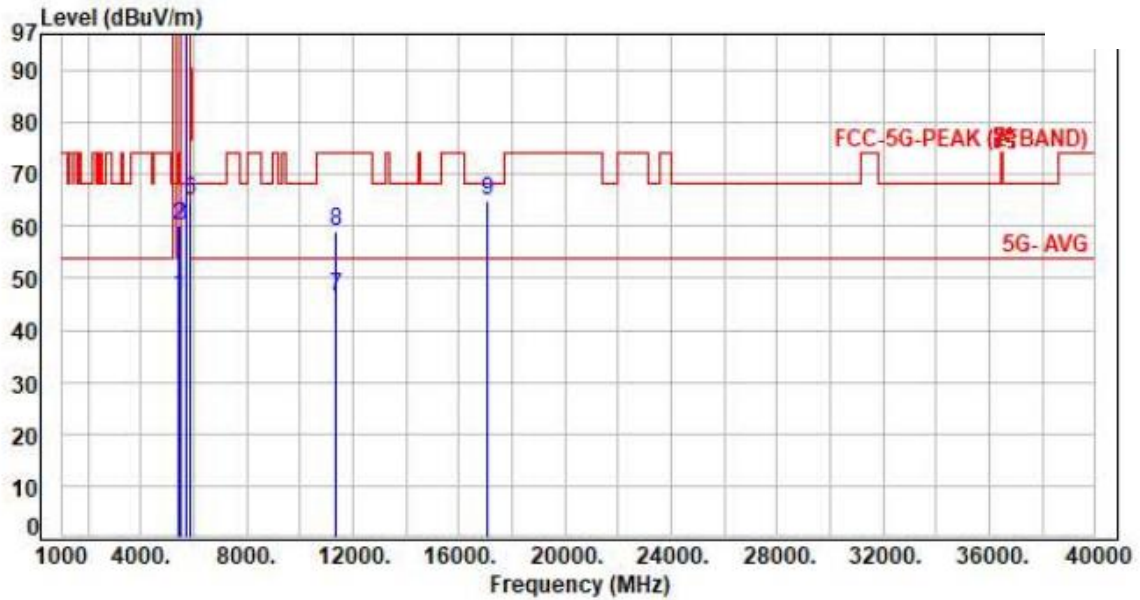


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	46.86	46.49	54.00	-7.51	Average	100	151	P
2	5460.00	-0.37	60.55	60.18	74.00	-13.82	Peak	100	151	P
3	5470.00	-0.35	60.29	59.94	68.20	-8.26	Peak	100	151	P
4	5690.00	0.66	98.02	98.68	200.00	-101.32	Average	100	151	P
5	5690.00	0.66	111.44	112.10	200.00	-87.90	Peak	100	151	P
6	5850.00	0.80	64.22	65.02	68.20	-3.18	Peak	100	151	P
7	11380.00	3.92	42.65	46.57	54.00	-7.43	Average	100	345	P
8	11380.00	3.92	54.94	58.86	74.00	-15.14	Peak	100	345	P
9	17070.00	3.91	60.94	64.85	68.20	-3.35	Peak	100	324	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 3 Straddle Channel, CH138		:

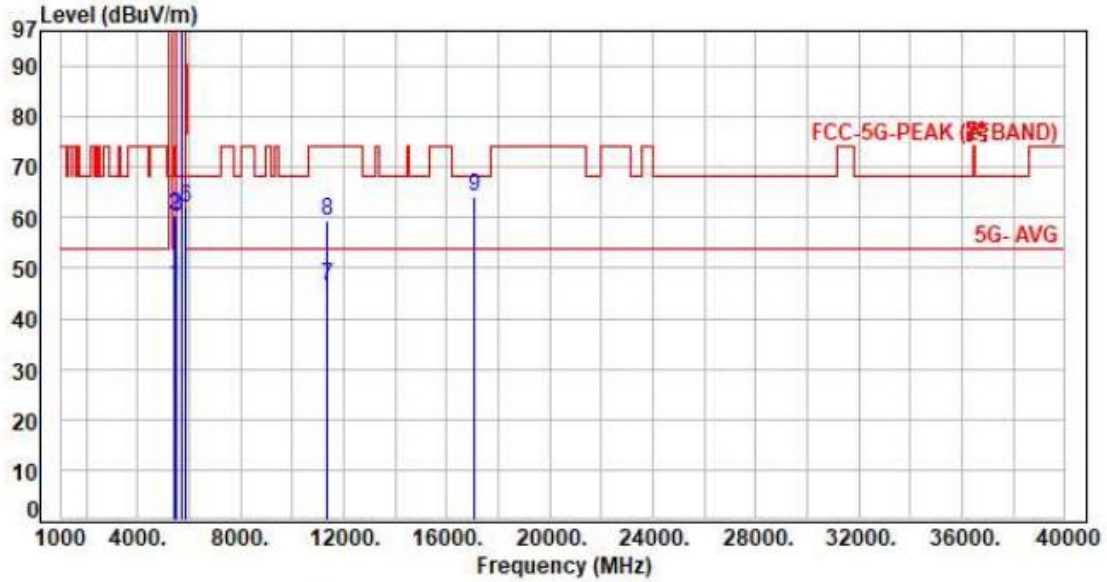


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	-0.37	46.80	46.43	54.00	-7.57	Average	203	299	P
2	5460.00	-0.37	60.97	60.60	74.00	-13.40	Peak	203	299	P
3	5470.00	-0.35	60.58	60.23	68.20	-7.97	Peak	203	299	P
4	5690.00	0.66	95.52	96.18	200.00	-103.82	Average	203	299	P
5	5690.00	0.66	107.79	108.45	200.00	-91.55	Peak	203	299	P
6	5850.00	0.80	61.30	62.10	68.20	-6.10	Peak	203	299	P
7	11380.00	3.92	42.39	46.31	54.00	-7.69	Average	100	223	P
8	11380.00	3.92	55.41	59.33	74.00	-14.67	Peak	100	223	P
9	17070.00	3.91	60.18	64.09	68.20	-4.11	Peak	100	347	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, Band 3 Straddle Channel, CH50		:

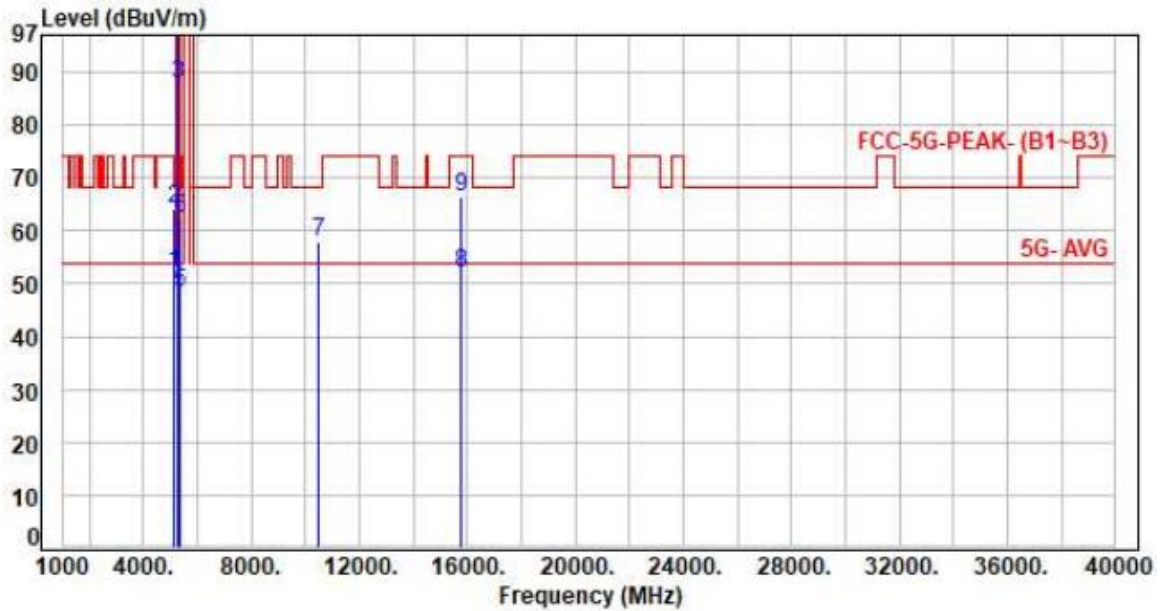

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-0.24	52.10	51.86	54.00	-2.14	Average	155	156	P
2	5150.00	-0.24	64.46	64.22	74.00	-9.78	Peak	155	156	P
3	5250.00	-0.36	87.99	87.63	200.00	-112.37	Average	155	156	P
4	5250.00	-0.36	99.98	99.62	200.00	-100.38	Peak	155	156	P
5	5350.00	-0.47	48.87	48.40	54.00	-5.60	Average	155	156	P
6	5350.00	-0.47	62.62	62.15	74.00	-11.85	Peak	155	156	P
7	10500.00	3.24	54.84	58.08	68.20	-10.12	Peak	100	341	P
8	15750.00	5.44	46.52	51.96	54.00	-2.04	Average	100	195	P
9	15750.00	5.44	60.83	66.27	74.00	-7.73	Peak	100	195	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, Band 3 Straddle Channel, CH50		:

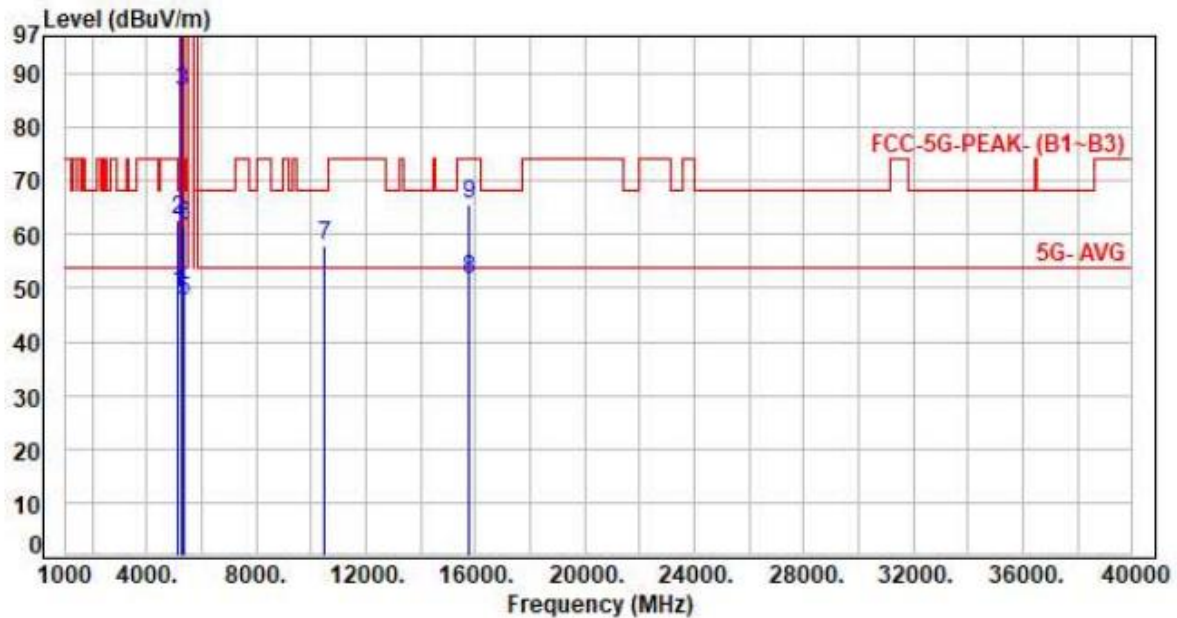


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-0.24	49.14	48.90	54.00	-5.10	Average	202	294	P
2	5150.00	-0.24	62.92	62.68	74.00	-11.32	Peak	202	294	P
3	5250.00	-0.36	86.96	86.60	200.00	-113.40	Average	202	294	P
4	5250.00	-0.36	98.46	98.10	200.00	-101.90	Peak	202	294	P
5	5350.00	-0.47	48.03	47.56	54.00	-6.44	Average	202	294	P
6	5350.00	-0.47	61.97	61.50	74.00	-12.50	Peak	202	294	P
7	10500.00	3.24	54.71	57.95	68.20	-10.25	Peak	100	221	P
8	15750.00	5.44	46.28	51.72	54.00	-2.28	Average	100	351	P
9	15750.00	5.44	60.19	65.63	74.00	-8.37	Peak	100	351	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH149		:

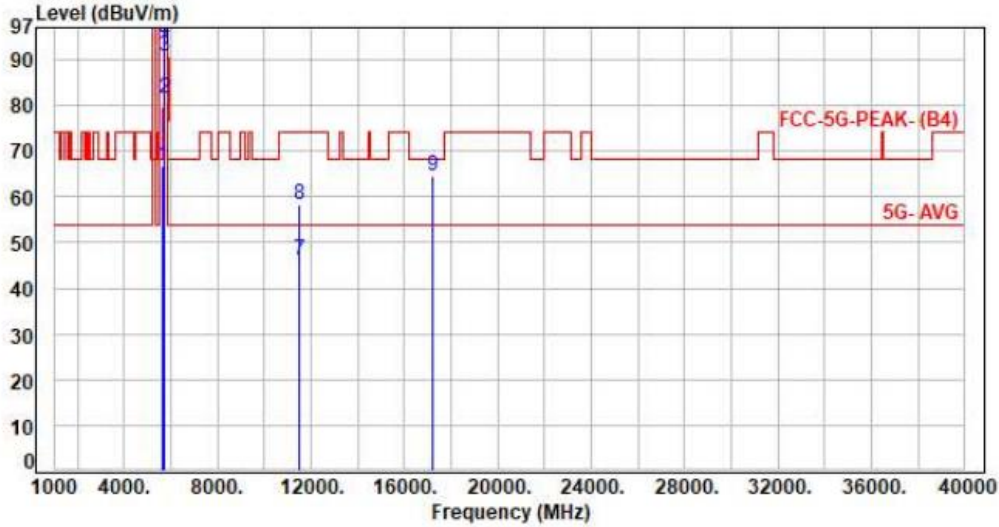


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	66.23	66.74	68.20	-1.46	Peak	119	158	P
2	5700.00	0.71	80.73	81.44	105.20	-23.76	Peak	119	158	P
3	5720.00	0.74	89.96	90.70	110.80	-20.10	Peak	119	158	P
4	5725.00	0.76	93.28	94.04	122.20	-28.16	Peak	119	158	P
5	5745.00	0.79	109.54	110.33	200.00	-89.67	Average	119	158	P
6	5745.00	0.79	119.11	119.90	200.00	-80.10	Peak	119	158	P
7	11490.00	3.83	42.36	46.19	54.00	-7.81	Average	100	348	P
8	11490.00	3.83	54.49	58.32	74.00	-15.68	Peak	100	348	P
9	17235.00	3.81	60.85	64.66	68.20	-3.54	Peak	100	325	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH149		:

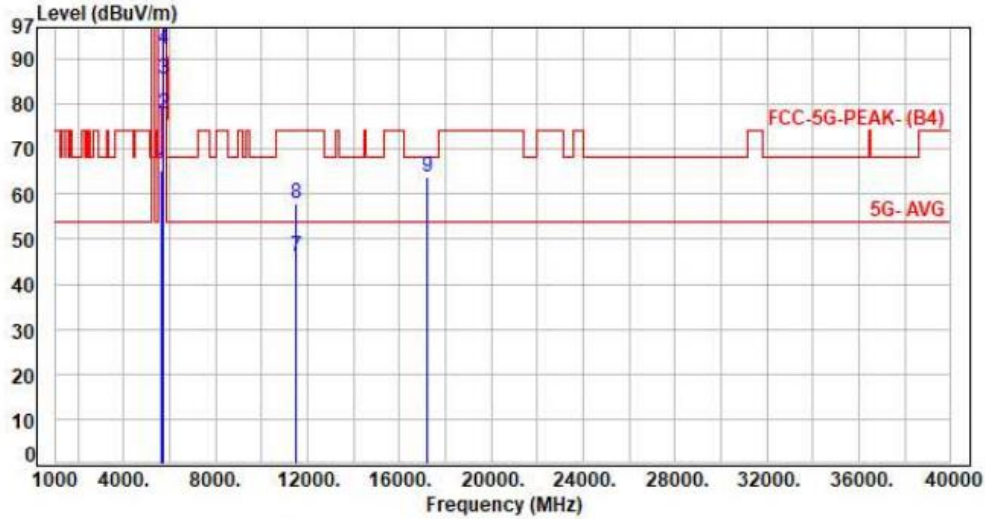


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	64.92	65.43	68.20	-2.77	Peak	198	299	P
2	5700.00	0.71	76.96	77.67	105.20	-27.53	Peak	198	299	P
3	5720.00	0.74	84.67	85.41	110.80	-25.39	Peak	198	299	P
4	5725.00	0.76	91.46	92.22	122.20	-29.98	Peak	198	299	P
5	5745.00	0.79	108.71	109.50	200.00	-90.50	Average	198	299	P
6	5745.00	0.79	118.07	118.86	200.00	-81.14	Peak	198	299	P
7	11490.00	3.83	42.17	46.00	54.00	-8.00	Average	100	228	P
8	11490.00	3.83	54.13	57.96	74.00	-16.04	Peak	100	228	P
9	17235.00	3.81	60.08	63.89	68.20	-4.31	Peak	100	350	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH157		:

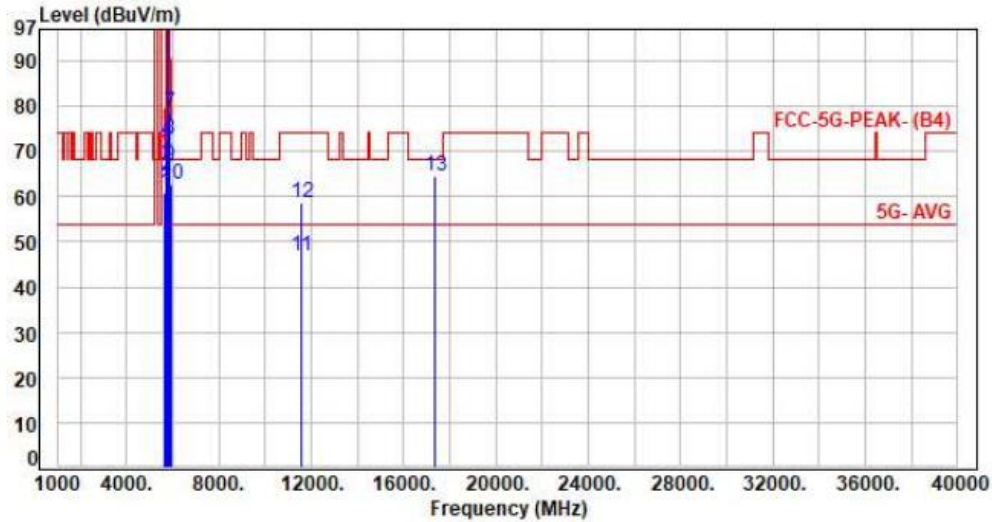


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	60.35	60.86	68.20	-7.34	Peak	100	158	P
2	5700.00	0.71	63.76	64.47	105.20	-40.73	Peak	100	158	P
3	5720.00	0.74	68.59	69.33	110.80	-41.47	Peak	100	158	P
4	5725.00	0.76	71.52	72.28	122.20	-49.92	Peak	100	158	P
5	5785.00	0.87	108.81	109.68	200.00	-90.32	Average	100	158	P
6	5785.00	0.87	118.43	119.30	200.00	-80.70	Peak	100	158	P
7	5850.00	0.80	77.59	78.39	122.20	-43.81	Peak	100	158	P
8	5855.00	0.79	72.05	72.84	110.80	-37.96	Peak	100	158	P
9	5875.00	0.80	66.13	66.93	105.20	-38.27	Peak	100	158	P
10	5925.00	0.85	61.96	62.81	68.20	-5.39	Peak	100	158	P
11	11570.00	3.83	43.10	46.93	54.00	-7.07	Average	100	344	P
12	11570.00	3.83	54.88	58.71	74.00	-15.29	Peak	100	344	P
13	17355.00	3.83	60.81	64.64	68.20	-3.56	Peak	100	322	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH157		:

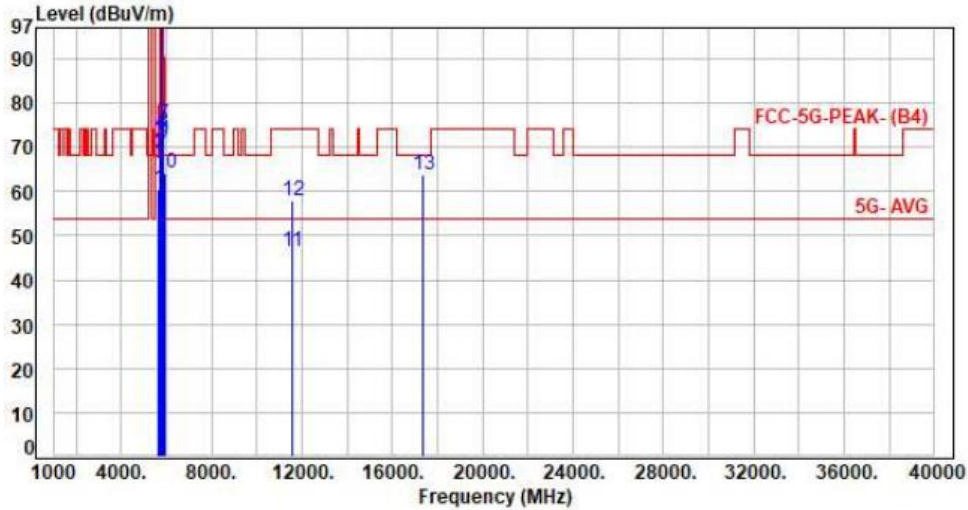


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	60.11	60.62	68.20	-7.58	Peak	206	301	P
2	5700.00	0.71	67.87	68.58	105.20	-36.62	Peak	206	301	P
3	5720.00	0.74	70.55	71.29	110.80	-39.51	Peak	206	301	P
4	5725.00	0.76	72.38	73.14	122.20	-49.06	Peak	206	301	P
5	5785.00	0.87	109.01	109.88	200.00	-90.12	Average	206	301	P
6	5785.00	0.87	118.23	119.10	200.00	-80.90	Peak	206	301	P
7	5850.00	0.80	74.53	75.33	122.20	-46.87	Peak	206	301	P
8	5855.00	0.79	72.74	73.53	110.80	-37.27	Peak	206	301	P
9	5875.00	0.80	70.20	71.00	105.20	-34.20	Peak	206	301	P
10	5925.00	0.85	63.41	64.26	68.20	-3.94	Peak	206	301	P
11	11570.00	3.83	42.74	46.57	54.00	-7.43	Average	100	225	P
12	11570.00	3.83	54.24	58.07	74.00	-15.93	Peak	100	225	P
13	17355.00	3.83	59.84	63.67	68.20	-4.53	Peak	100	346	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, Band 4, CH165		:

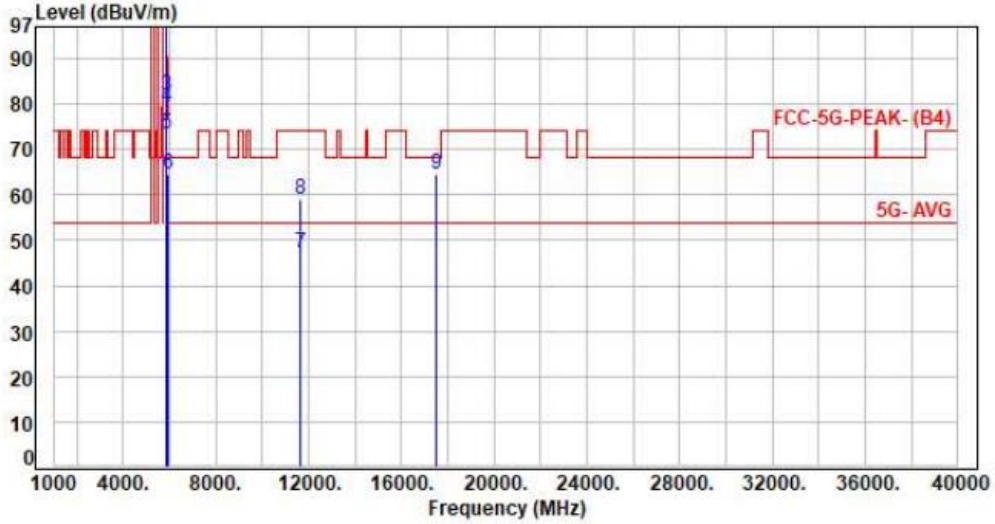


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	0.85	108.45	109.30	200.00	-90.70	Average	100	156	P
2	5825.00	0.85	117.99	118.84	200.00	-81.16	Peak	100	156	P
3	5850.00	0.80	80.93	81.73	122.20	-40.47	Peak	100	156	P
4	5855.00	0.79	78.53	79.32	110.80	-31.48	Peak	100	156	P
5	5875.00	0.80	72.58	73.38	105.20	-31.82	Peak	100	156	P
6	5925.00	0.85	63.74	64.59	68.20	-3.61	Peak	100	156	P
7	11650.00	3.76	43.58	47.34	54.00	-6.66	Average	100	348	P
8	11650.00	3.76	55.08	58.84	74.00	-15.16	Peak	100	348	P
9	17475.00	3.89	60.48	64.37	68.20	-3.83	Peak	100	327	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, Band 4, CH165		:

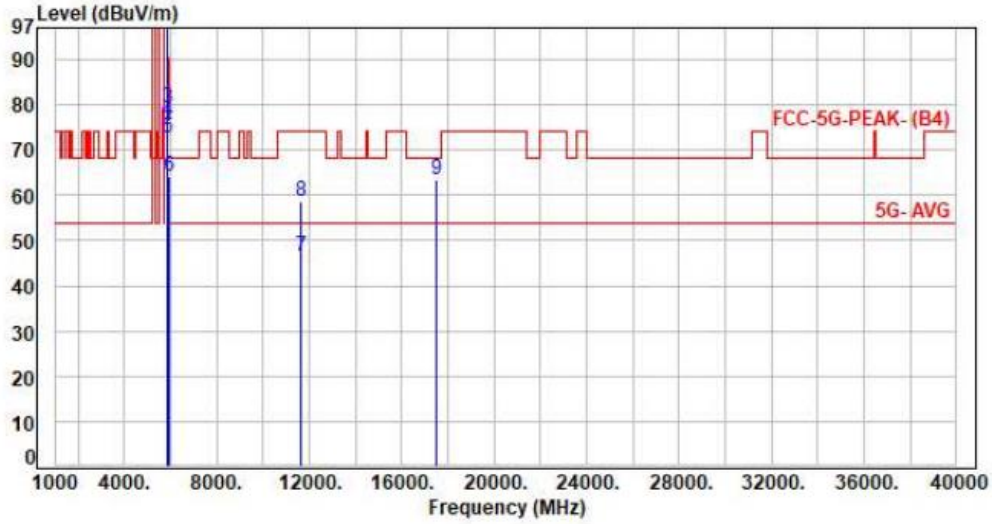


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	0.85	108.63	109.48	200.00	-90.52	Average	204	301	P
2	5825.00	0.85	117.89	118.74	200.00	-81.26	Peak	204	301	P
3	5850.00	0.80	78.60	79.40	122.20	-42.80	Peak	204	301	P
4	5855.00	0.79	75.54	76.33	110.80	-34.47	Peak	204	301	P
5	5875.00	0.80	71.94	72.74	105.20	-32.46	Peak	204	301	P
6	5925.00	0.85	63.47	64.32	68.20	-3.88	Peak	204	301	P
7	11650.00	3.76	42.75	46.51	54.00	-7.49	Average	100	345	P
8	11650.00	3.76	54.87	58.63	74.00	-15.37	Peak	100	345	P
9	17475.00	3.89	59.65	63.54	68.20	-4.66	Peak	100	342	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, CH149		:

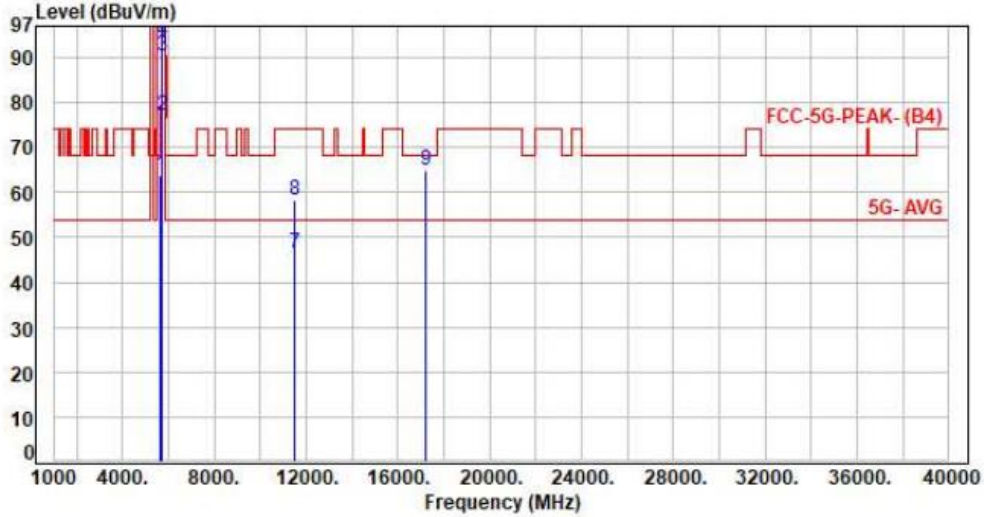


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	63.37	63.88	68.20	-4.32	Peak	126	155	P
2	5700.00	0.71	76.31	77.02	105.20	-28.18	Peak	126	155	P
3	5720.00	0.74	89.60	90.34	110.80	-20.46	Peak	126	155	P
4	5725.00	0.76	93.06	93.82	122.20	-28.38	Peak	126	155	P
5	5745.00	0.79	107.39	108.18	200.00	-91.82	Average	126	155	P
6	5745.00	0.79	120.65	121.44	200.00	-78.56	Peak	126	155	P
7	11490.00	3.83	42.58	46.41	54.00	-7.59	Average	100	343	P
8	11490.00	3.83	54.49	58.32	74.00	-15.68	Peak	100	343	P
9	17235.00	3.81	60.95	64.76	68.20	-3.44	Peak	100	322	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, CH149		:

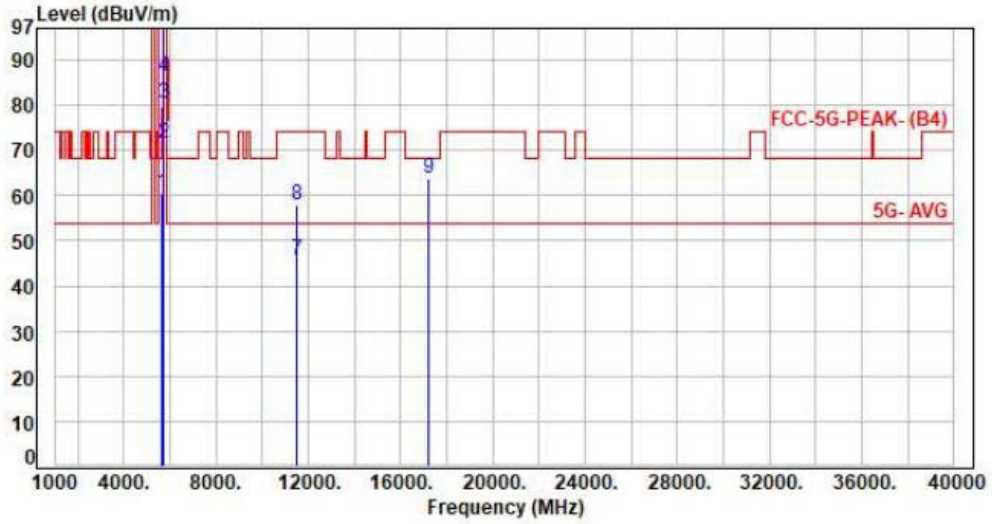


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	59.92	60.43	68.20	-7.77	Peak	204	297	P
2	5700.00	0.71	70.66	71.37	105.20	-33.83	Peak	204	297	P
3	5720.00	0.74	79.59	80.33	110.80	-30.47	Peak	204	297	P
4	5725.00	0.76	85.64	86.40	122.20	-35.80	Peak	204	297	P
5	5745.00	0.79	106.41	107.20	200.00	-92.80	Average	204	297	P
6	5745.00	0.79	120.13	120.92	200.00	-79.08	Peak	204	297	P
7	11490.00	3.83	42.05	45.88	54.00	-8.12	Average	100	225	P
8	11490.00	3.83	54.12	57.95	74.00	-16.05	Peak	100	225	P
9	17235.00	3.81	60.09	63.90	68.20	-4.30	Peak	100	343	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, CH157		:

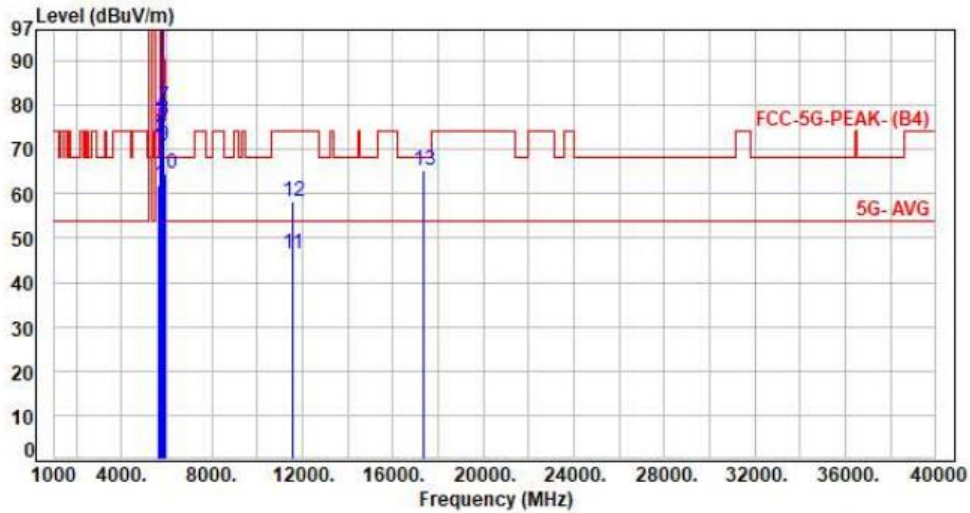


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	61.36	61.87	68.20	-6.33	Peak	124	155	P
2	5700.00	0.71	71.96	72.67	105.20	-32.53	Peak	124	155	P
3	5720.00	0.74	75.18	75.92	110.80	-34.88	Peak	124	155	P
4	5725.00	0.76	76.99	77.75	122.20	-44.45	Peak	124	155	P
5	5785.00	0.87	107.23	108.10	200.00	-91.90	Average	124	155	P
6	5785.00	0.87	120.48	121.35	200.00	-78.65	Peak	124	155	P
7	5850.00	0.80	78.87	79.67	122.20	-42.53	Peak	124	155	P
8	5855.00	0.79	76.06	76.85	110.80	-33.95	Peak	124	155	P
9	5875.00	0.80	70.03	70.83	105.20	-34.37	Peak	124	155	P
10	5925.00	0.85	63.66	64.51	68.20	-3.69	Peak	124	155	P
11	11570.00	3.83	42.70	46.53	54.00	-7.47	Average	100	226	P
12	11570.00	3.83	54.36	58.19	74.00	-15.81	Peak	100	226	P
13	17355.00	3.83	61.27	65.10	68.20	-3.10	Peak	100	323	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, CH157		:

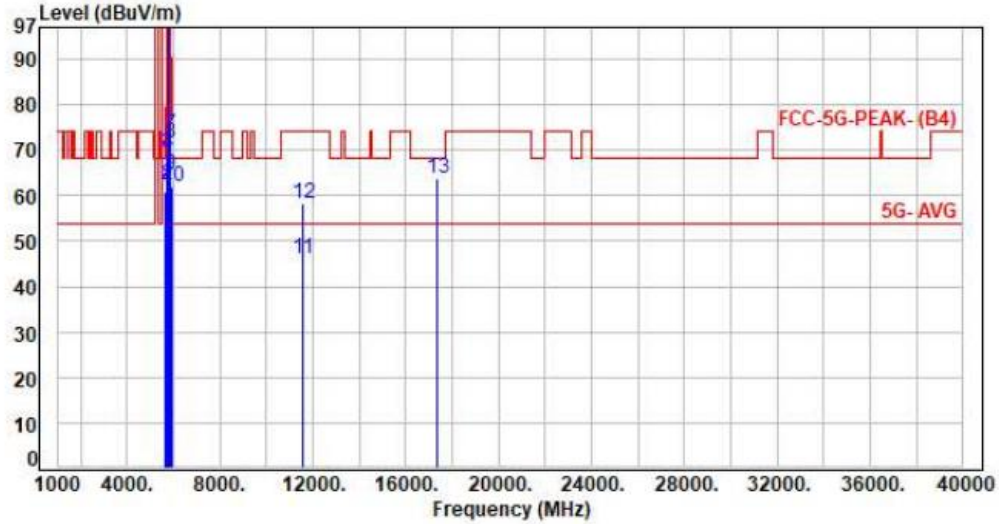


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	60.35	60.86	68.20	-7.34	Peak	196	300	P
2	5700.00	0.71	61.55	62.26	105.20	-42.94	Peak	196	300	P
3	5720.00	0.74	68.50	69.24	110.80	-41.56	Peak	196	300	P
4	5725.00	0.76	68.48	69.24	122.20	-52.96	Peak	196	300	P
5	5785.00	0.87	107.82	108.69	200.00	-91.31	Average	196	300	P
6	5785.00	0.87	120.74	121.61	200.00	-78.39	Peak	196	300	P
7	5850.00	0.80	72.55	73.35	122.20	-48.85	Peak	196	300	P
8	5855.00	0.79	70.69	71.48	110.80	-39.32	Peak	196	300	P
9	5875.00	0.80	63.91	64.71	105.20	-40.49	Peak	196	300	P
10	5925.00	0.85	61.23	62.08	68.20	-6.12	Peak	196	300	P
11	11570.00	3.83	42.43	46.26	54.00	-7.74	Average	100	226	P
12	11570.00	3.83	54.38	58.21	74.00	-15.79	Peak	100	226	P
13	17355.00	3.83	60.13	63.96	68.20	-4.24	Peak	100	350	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, CH165		:

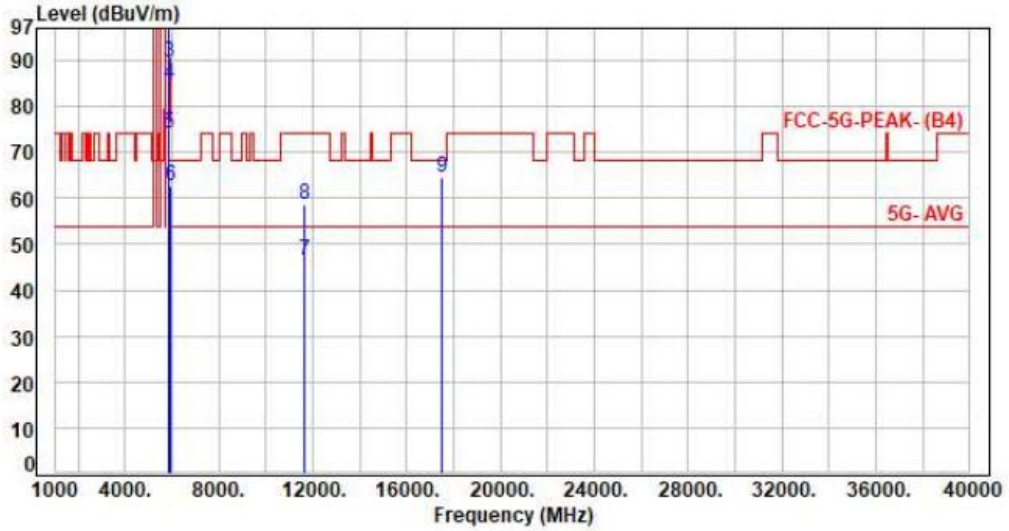


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	0.85	107.19	108.04	200.00	-91.96	Average	109	155	P
2	5825.00	0.85	120.40	121.25	200.00	-78.75	Peak	109	155	P
3	5850.00	0.80	88.85	89.65	122.20	-32.55	Peak	109	155	P
4	5855.00	0.79	84.05	84.84	110.80	-25.96	Peak	109	155	P
5	5875.00	0.80	73.47	74.27	105.20	-30.93	Peak	109	155	P
6	5925.00	0.85	61.70	62.55	68.20	-5.65	Peak	109	155	P
7	11650.00	3.76	42.57	46.33	54.00	-7.67	Average	100	339	P
8	11650.00	3.76	54.75	58.51	74.00	-15.49	Peak	100	339	P
9	17475.00	3.89	60.74	64.63	68.20	-3.57	Peak	100	324	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, CH165		:

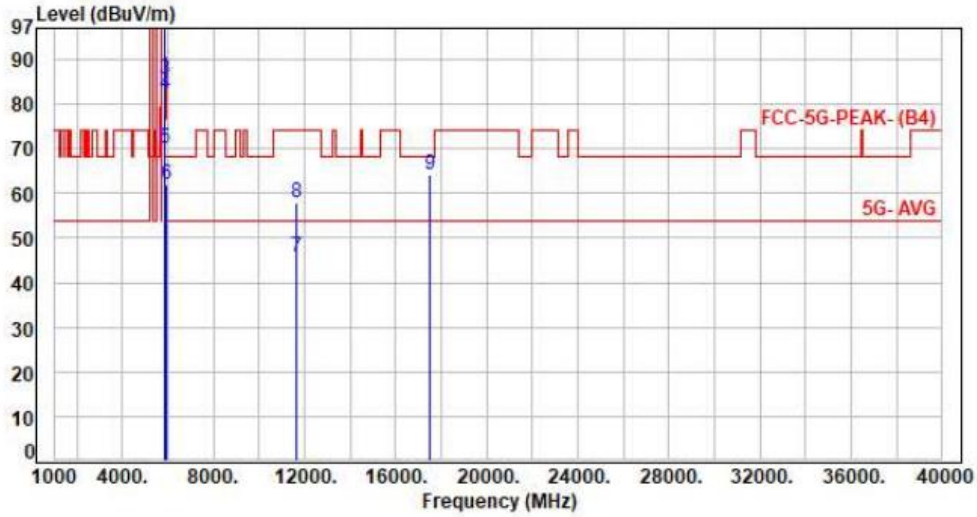


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	0.85	107.27	108.12	200.00	-91.88	Average	202	300	P
2	5825.00	0.85	120.60	121.45	200.00	-78.55	Peak	202	300	P
3	5850.00	0.80	84.63	85.43	122.20	-36.77	Peak	202	300	P
4	5855.00	0.79	81.28	82.07	110.00	-28.73	Peak	202	300	P
5	5875.00	0.80	69.44	70.24	105.20	-34.96	Peak	202	300	P
6	5925.00	0.85	61.26	62.11	68.20	-6.09	Peak	202	300	P
7	11650.00	3.76	42.15	45.91	54.00	-8.09	Average	100	224	P
8	11650.00	3.76	54.20	57.96	74.00	-16.04	Peak	100	224	P
9	17475.00	3.89	60.25	64.14	68.20	-4.06	Peak	100	349	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 4, CH151		:

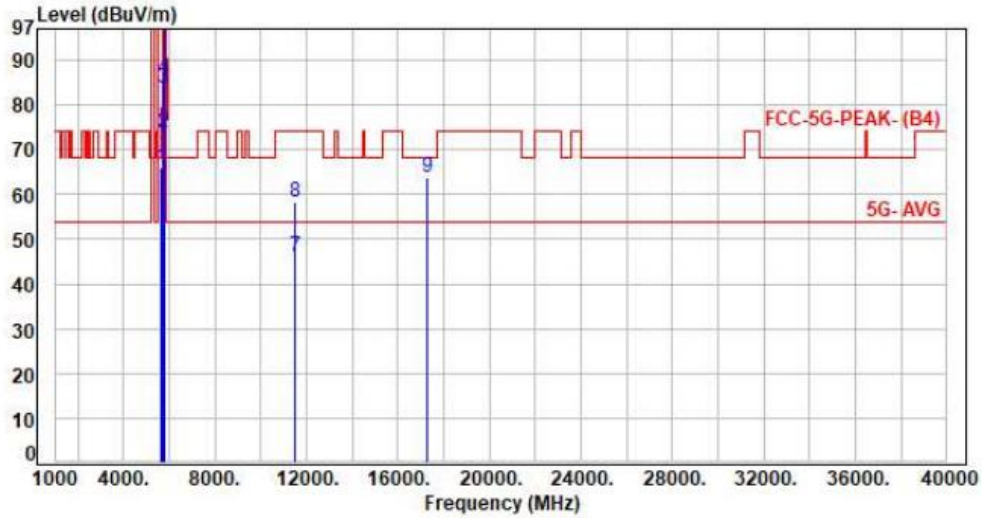


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	65.41	65.92	68.20	-2.28	Peak	115	154	P
2	5700.00	0.71	73.23	73.94	105.20	-31.26	Peak	115	154	P
3	5720.00	0.74	83.10	83.84	110.80	-26.96	Peak	115	154	P
4	5725.00	0.76	85.23	85.99	122.20	-36.21	Peak	115	154	P
5	5755.00	0.81	102.32	103.13	200.00	-96.87	Average	115	154	P
6	5755.00	0.81	115.16	115.97	200.00	-84.03	Peak	115	154	P
7	11510.00	3.81	42.29	46.10	54.00	-7.90	Average	100	342	P
8	11510.00	3.81	54.38	58.19	74.00	-15.81	Peak	100	342	P
9	17265.00	3.85	59.83	63.68	68.20	-4.52	Peak	100	328	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 4, CH151		:

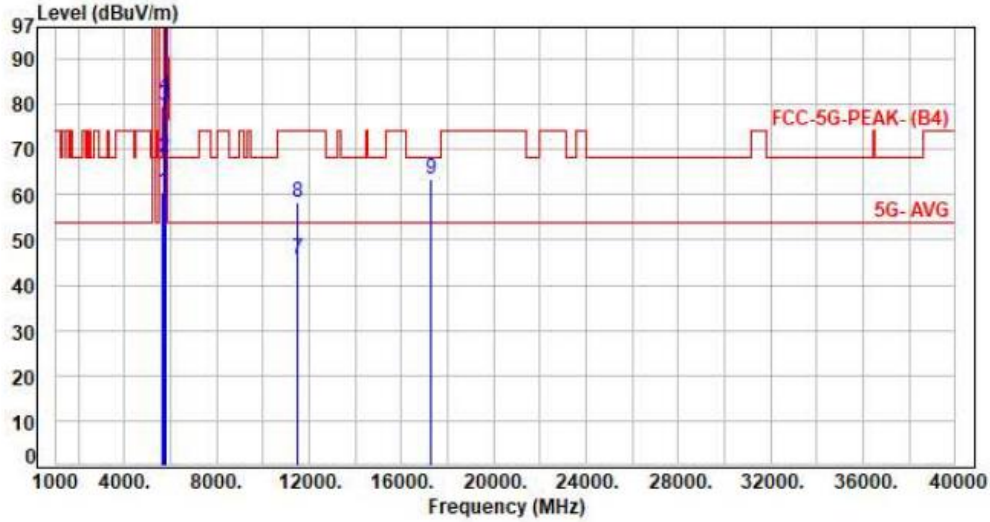


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	59.89	60.40	68.20	-7.80	Peak	199	299	P
2	5700.00	0.71	67.62	68.33	105.20	-36.87	Peak	199	299	P
3	5720.00	0.74	78.93	79.67	110.80	-31.13	Peak	199	299	P
4	5725.00	0.76	81.19	81.95	122.20	-40.25	Peak	199	299	P
5	5755.00	0.81	101.57	102.38	200.00	-97.62	Average	199	299	P
6	5755.00	0.81	113.68	114.49	200.00	-85.51	Peak	199	299	P
7	11510.00	3.81	41.92	45.73	54.00	-8.27	Average	100	218	P
8	11510.00	3.81	54.64	58.45	74.00	-15.55	Peak	100	218	P
9	17265.00	3.85	59.47	63.32	68.20	-4.88	Peak	100	348	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 4, CH159		

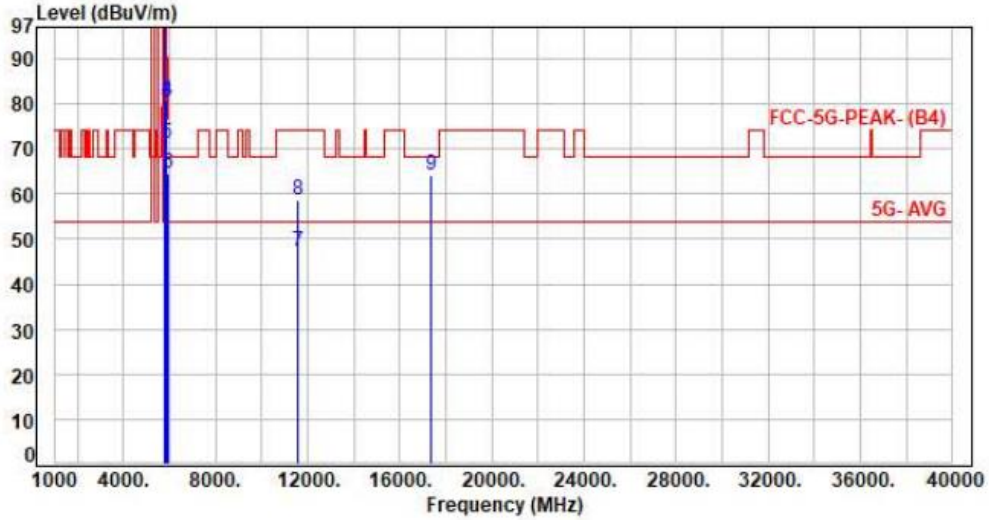


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	0.89	102.79	103.68	200.00	-96.32	Average	100	158	P
2	5795.00	0.89	114.94	115.83	200.00	-84.17	Peak	100	158	P
3	5850.00	0.80	79.61	80.41	122.20	-41.79	Peak	100	158	P
4	5855.00	0.79	79.97	80.76	110.80	-30.04	Peak	100	158	P
5	5875.00	0.80	70.50	71.30	105.20	-33.90	Peak	100	158	P
6	5925.00	0.85	63.87	64.72	68.20	-3.48	Peak	100	158	P
7	11590.00	3.83	43.28	47.11	54.00	-6.89	Average	100	346	P
8	11590.00	3.83	54.64	58.47	74.00	-15.53	Peak	100	346	P
9	17385.00	3.88	60.19	64.07	68.20	-4.13	Peak	100	321	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, Band 4, CH159		:

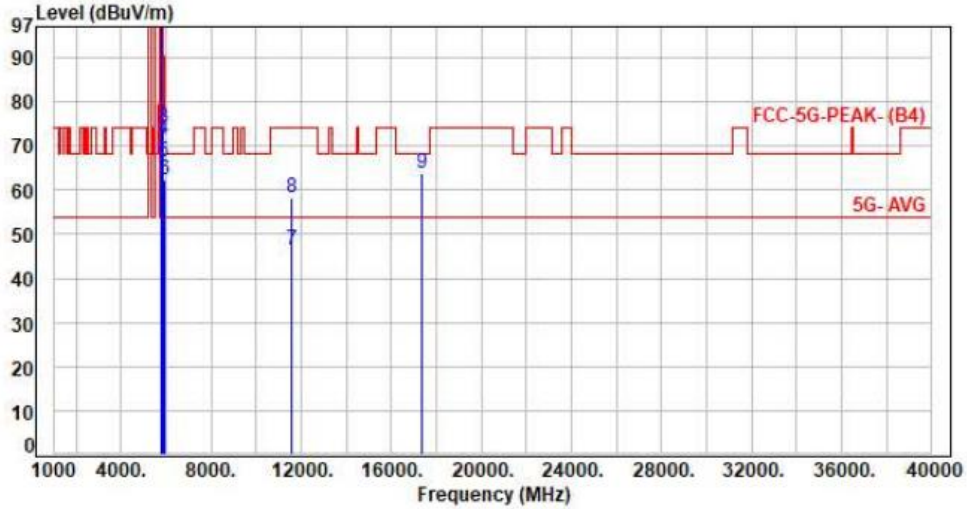


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	0.89	102.30	103.19	200.00	-96.81	Average	203	301	P
2	5795.00	0.89	114.72	115.61	200.00	-84.39	Peak	203	301	P
3	5850.00	0.80	73.44	74.24	122.20	-47.96	Peak	203	301	P
4	5855.00	0.79	70.60	71.39	110.80	-39.41	Peak	203	301	P
5	5875.00	0.80	65.63	66.43	105.20	-38.77	Peak	203	301	P
6	5925.00	0.85	61.64	62.49	68.20	-5.71	Peak	203	301	P
7	11590.00	3.83	42.74	46.57	54.00	-7.43	Average	100	227	P
8	11590.00	3.83	54.55	58.38	74.00	-15.62	Peak	100	227	P
9	17385.00	3.88	60.07	63.95	68.20	-4.25	Peak	100	346	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, CH155		:

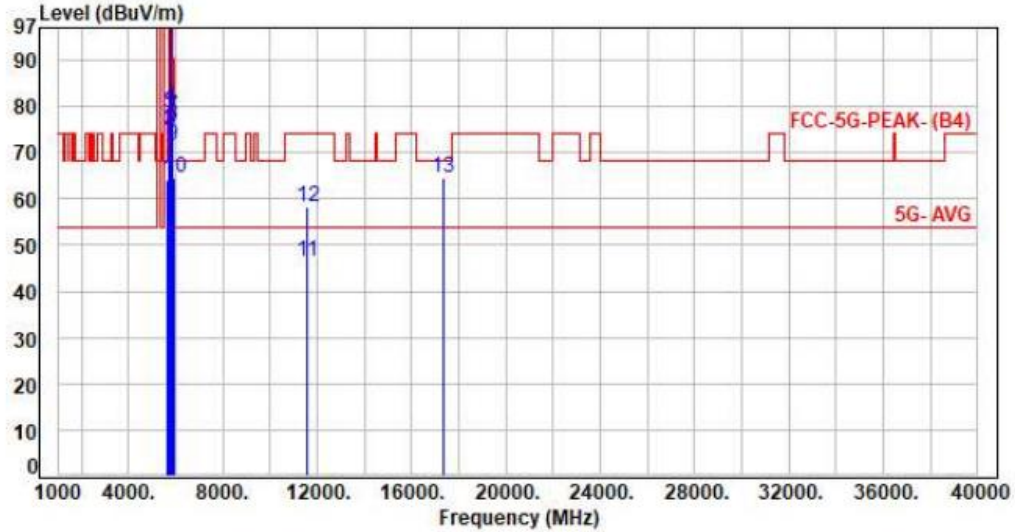


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	63.69	64.20	68.20	-4.00	Peak	105	156	P
2	5700.00	0.71	74.22	74.93	105.20	-30.27	Peak	105	156	P
3	5720.00	0.74	77.79	78.53	110.80	-32.27	Peak	105	156	P
4	5725.00	0.76	78.92	79.68	122.20	-42.52	Peak	105	156	P
5	5775.00	0.85	98.01	98.86	200.00	-101.14	Average	105	156	P
6	5775.00	0.85	111.10	111.95	200.00	-88.05	Peak	105	156	P
7	5850.00	0.80	77.18	77.98	122.20	-44.22	Peak	105	156	P
8	5855.00	0.79	75.12	75.91	110.80	-34.89	Peak	105	156	P
9	5875.00	0.80	70.63	71.43	105.20	-33.77	Peak	105	156	P
10	5925.00	0.85	63.71	64.56	68.20	-3.64	Peak	105	156	P
11	11550.00	3.81	42.76	46.57	54.00	-7.43	Average	100	345	P
12	11550.00	3.81	54.53	58.34	74.00	-15.66	Peak	100	345	P
13	17325.00	3.83	60.69	64.52	68.20	-3.68	Peak	100	326	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, Band 4, CH155		:

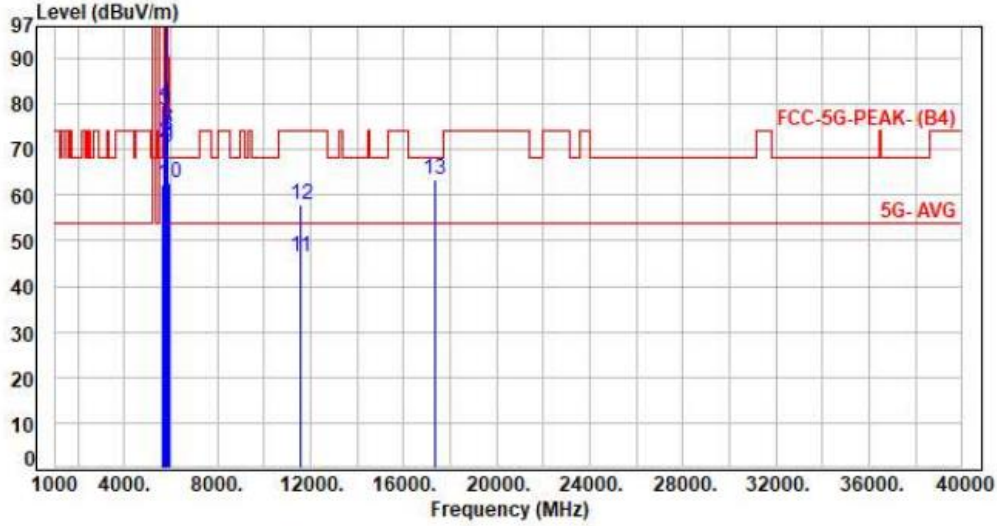

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	0.51	61.88	62.39	68.20	-5.81	Peak	198	299	P
2	5700.00	0.71	70.71	71.42	105.20	-33.78	Peak	198	299	P
3	5720.00	0.74	77.94	78.68	110.80	-32.12	Peak	198	299	P
4	5725.00	0.76	79.28	80.04	122.20	-42.16	Peak	198	299	P
5	5775.00	0.85	97.31	98.16	200.00	-101.84	Average	198	299	P
6	5775.00	0.85	109.75	110.60	200.00	-89.40	Peak	198	299	P
7	5850.00	0.80	73.36	74.16	122.20	-48.04	Peak	198	299	P
8	5855.00	0.79	72.23	73.02	110.80	-37.78	Peak	198	299	P
9	5875.00	0.80	69.62	70.42	105.20	-34.78	Peak	198	299	P
10	5925.00	0.85	61.97	62.82	68.20	-5.38	Peak	198	299	P
11	11550.00	3.81	42.50	46.31	54.00	-7.69	Average	100	227	P
12	11550.00	3.81	54.27	58.08	74.00	-15.92	Peak	100	227	P
13	17325.00	3.83	59.78	63.61	68.20	-4.59	Peak	100	346	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout

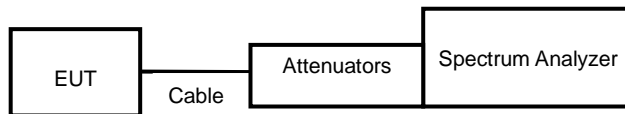

7.4. Test Result and Data

Non-Beamforming

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	1.98	2.09	94.90%
802.11ax HE20	5.46	5.94	91.92%
802.11ax HE40	5.44	5.90	92.20%
802.11ax HE80	5.46	5.96	91.61%
802.11ax HE160	5.46	5.96	91.61%

Beamforming


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ax HE20	5.47	5.91	92.49%
802.11ax HE40	5.46	5.95	91.73%
802.11ax HE80	5.47	5.99	91.28%
802.11ax HE160	5.46	5.94	92.05%

7.5. Measurement Methods


26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H




Non-Beamforming
Modulation Type: 802.11a (6Mbps)

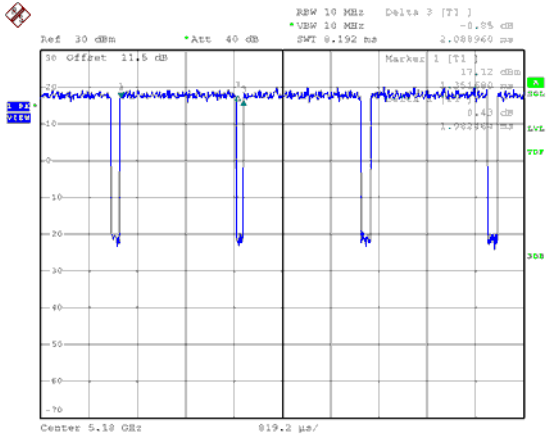


Modulation Type: 802.11ax HE80(30.6Mbps)

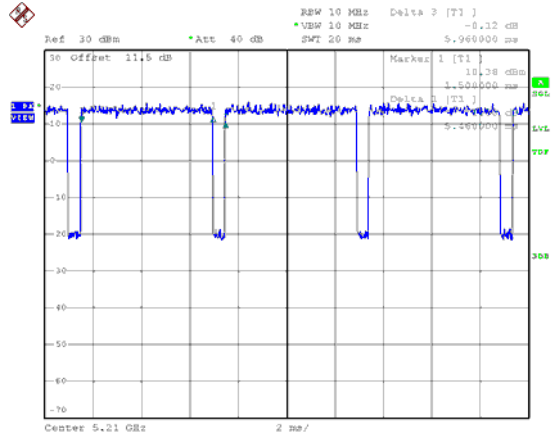


Modulation Type: 802.11ax HE20(7.3Mbps)

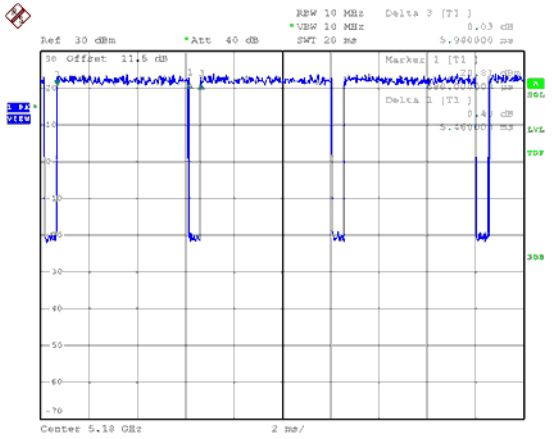

Modulation Type: 802.11ax HE160(61.3Mbps)

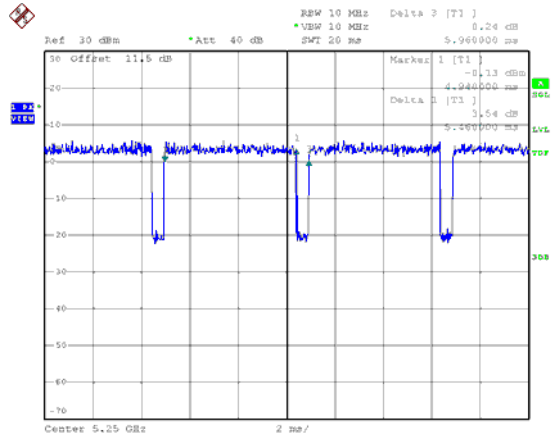

Modulation Type: 802.11ax HE40(14.6Mbps)

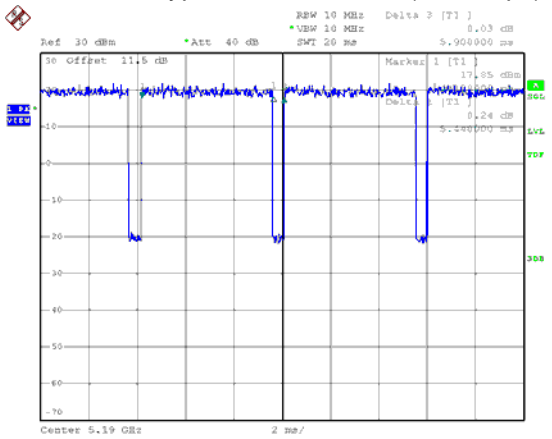




Beamforming

Modulation Type: 802.11ax HE20(7.3Mbps)

Modulation Type: 802.11ax HE160(61.3Mbps)

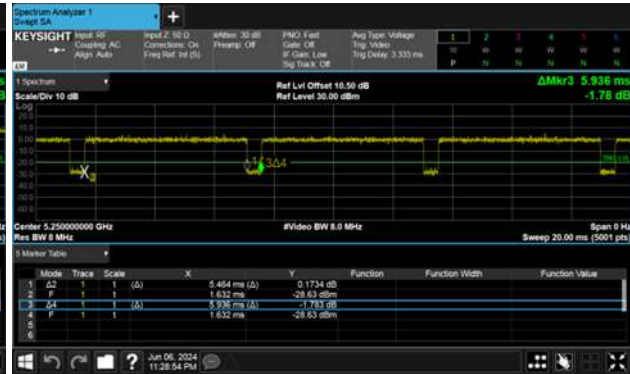

Modulation Type: 802.11ax HE40(14.6Mbps)



Modulation Type: 802.11ax HE80(30.6Mbps)





8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout

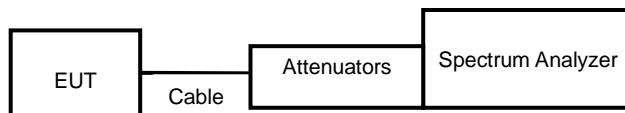



8.4. Test Result and Data

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)		Minimum Limit (MHz)
			ANT A	ANT B	
11a	149	5745	15.06	15.09	0.50
11a	157	5785	15.06	15.06	0.50
11a	165	5825	15.09	15.09	0.50
11ax HE20	149	5745	15.00	15.06	0.50
11ax HE20	157	5785	15.03	16.83	0.50
11ax HE20	165	5825	15.06	13.74	0.50
11ax HE40	151	5755	34.98	33.78	0.50
11ax HE40	159	5795	35.10	35.46	0.50
11ax HE80	155	5775	71.28	42.24	0.50

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11a	149	5745	16.89	21.48
11a	157	5785	17.13	23.64
11a	165	5825	16.71	18.84
11ax HE20	149	5745	18.93	19.20
11ax HE20	157	5785	19.44	23.37
11ax HE20	165	5825	18.93	19.17
11ax HE40	151	5755	37.74	38.10
11ax HE40	159	5795	37.74	37.98
11ax HE80	155	5775	76.44	76.80





UNII Emission Bandwidth Result (Extends across 5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth(MHz)		99% Bandwidth(MHz)	
			ANT A	ANT B	ANT A	ANT B
11a	6 Mbps	5720	3.13	2.88	4.13	6.38
11ax HE20	NSS1-MCS0	5720	4.38	3.63	4.63	4.75
11ax HE40	NSS1-MCS0	5710	4.00	4.13	14.88	37.75
11ax HE80	NSS1-MCS0	5690	3.88	4.00	29.63	57.63




6dB Bandwidth- ANT A
Modulation Type: 802.11a (6Mbps)
CH149


Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

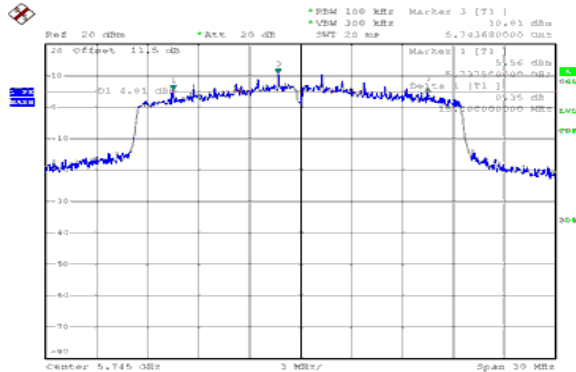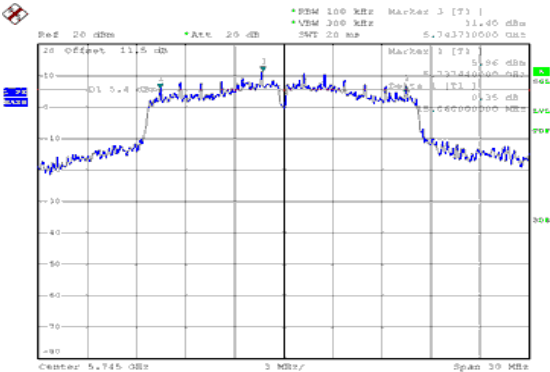


CH157

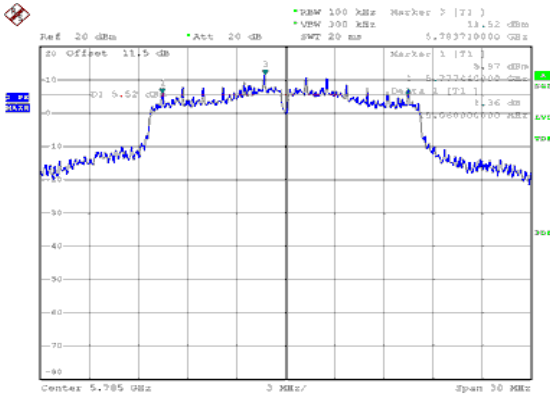


CH157

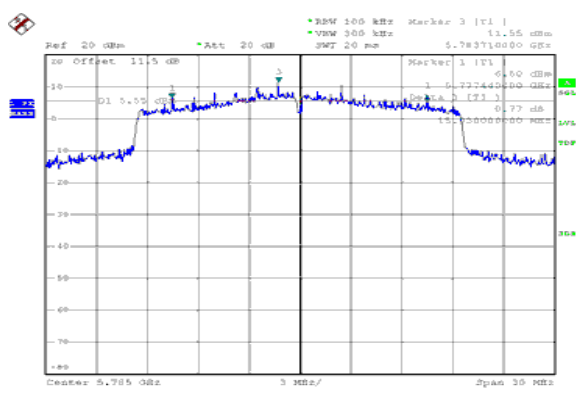

CH165

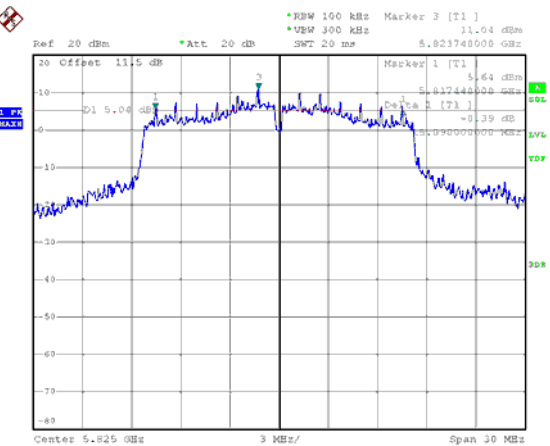


CH165

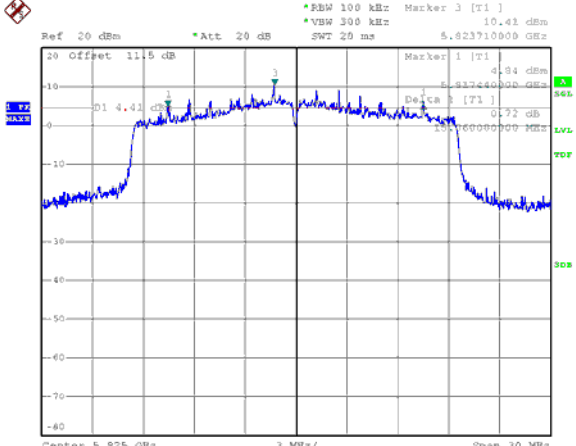




6dB Bandwidth-ANT A


Modulation Type: 802.11ax HE40(14.6Mbps)
CH151

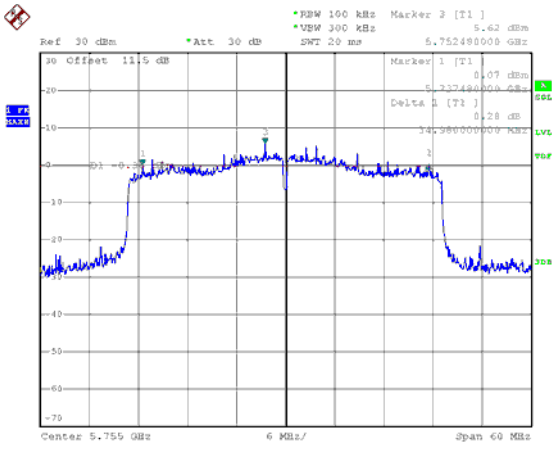

Modulation Type: 802.11ax HE80(30.6Mbps)
CH155

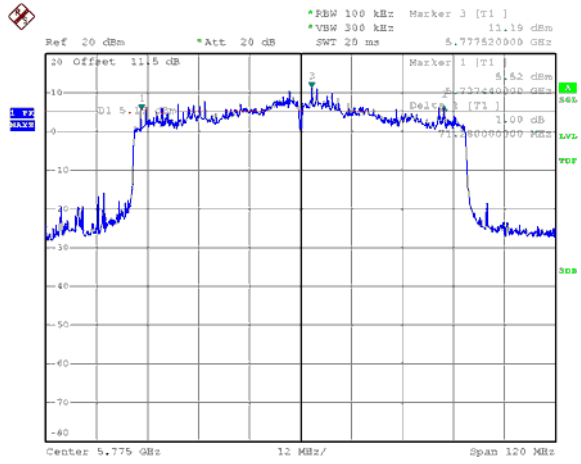


CH159

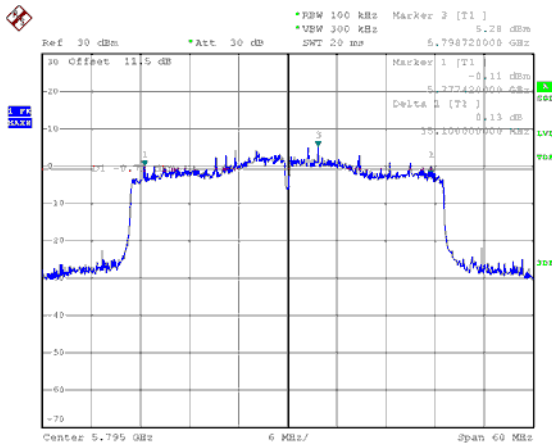





6dB Bandwidth- ANT B
Modulation Type: 802.11a (6Mbps)
CH149

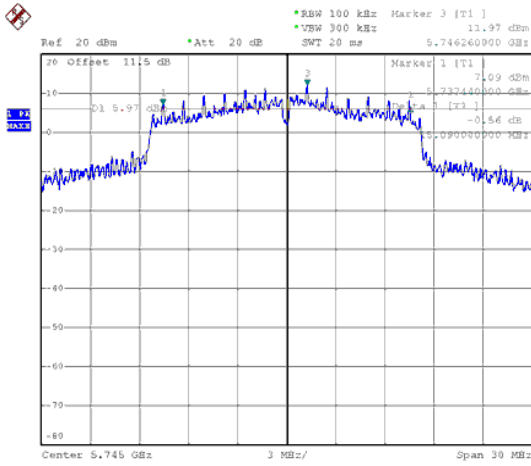


Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

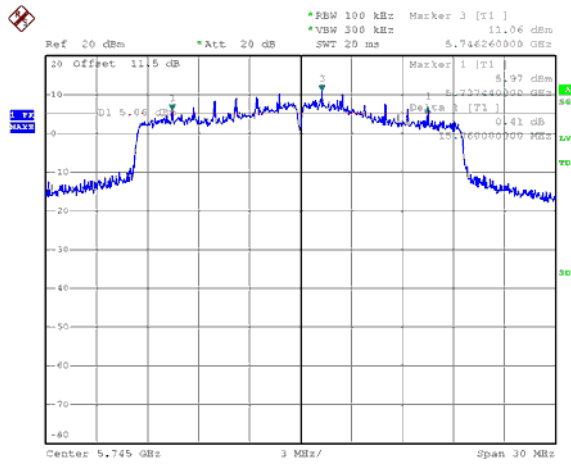


CH157

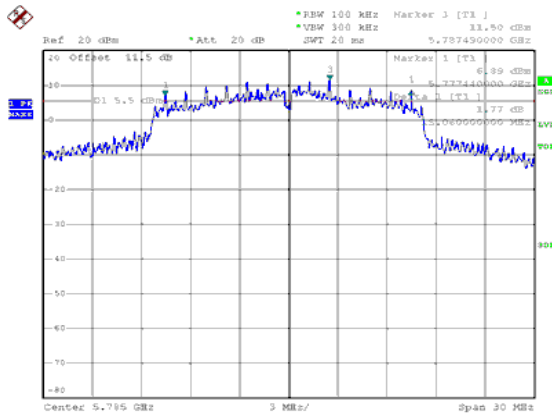


CH157

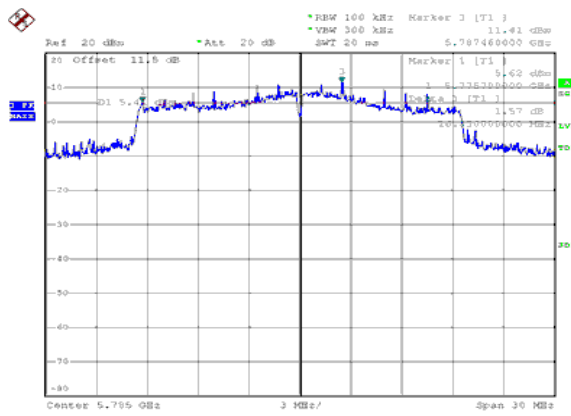

CH165

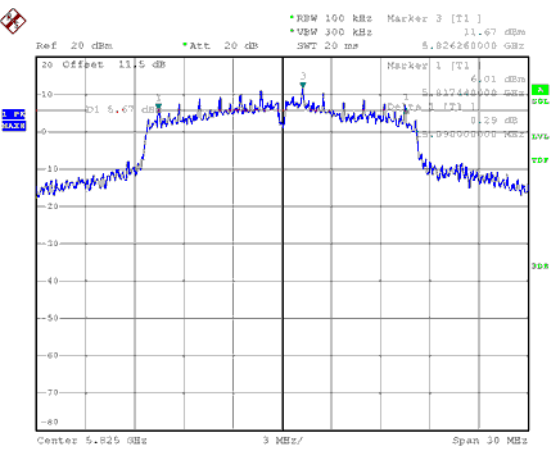


CH165

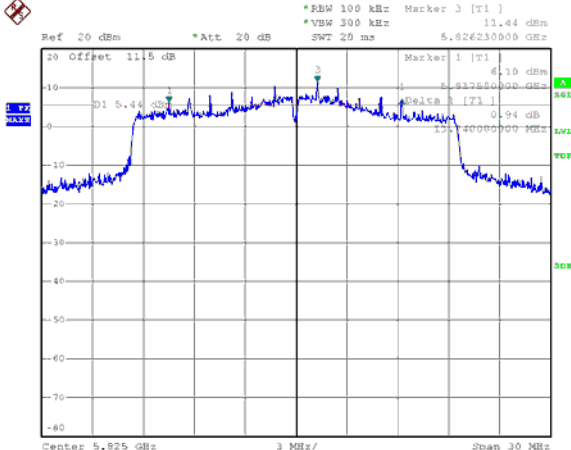





6dB Bandwidth-ANT B
Modulation Type: 802.11ax HE40(14.6Mbps)
CH151

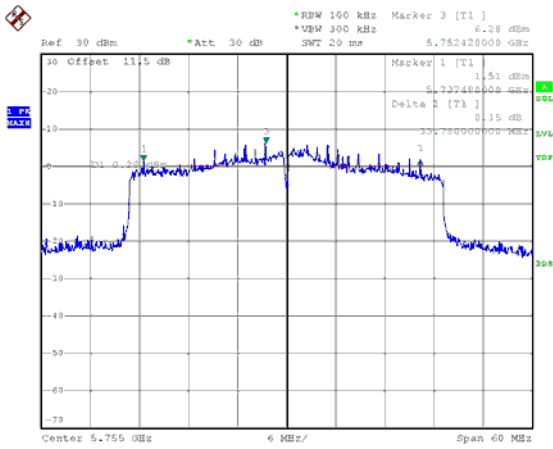

Modulation Type: 802.11ax HE80(30.6Mbps)
CH155

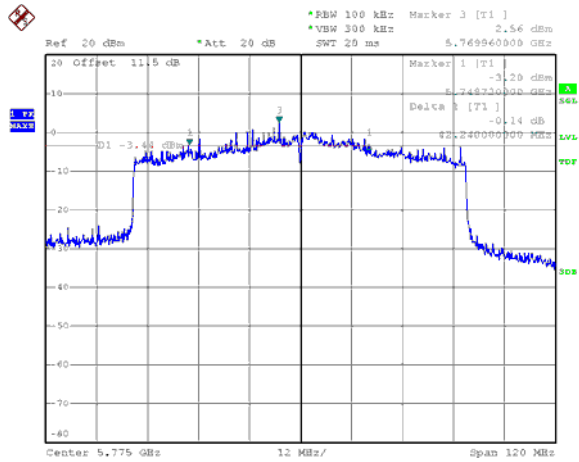


CH159

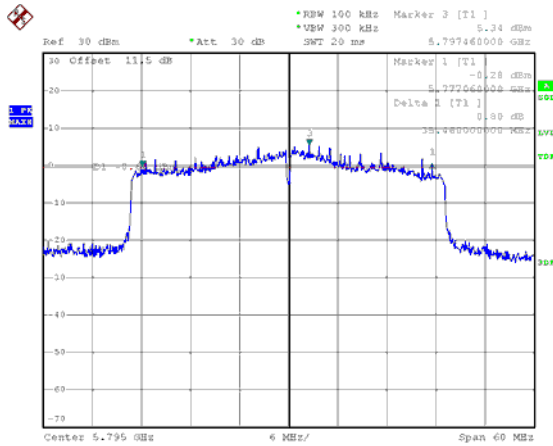





6dB Bandwidth-ANT A
 Extends across 5725MHz Band, Straddle Channel
 Modulation Type: 802.11a (6Mbps)
 CH144

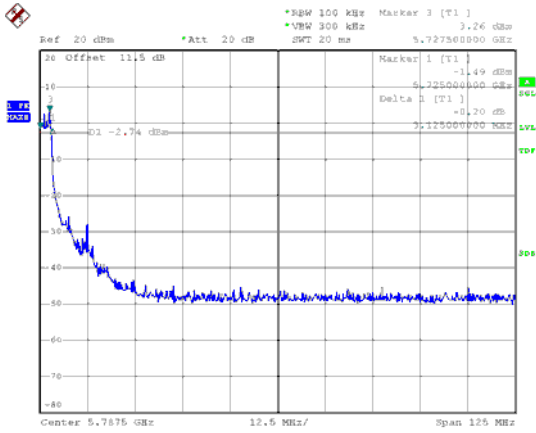


Modulation Type: 802.11ax HE80(30.6Mbps)
 CH138

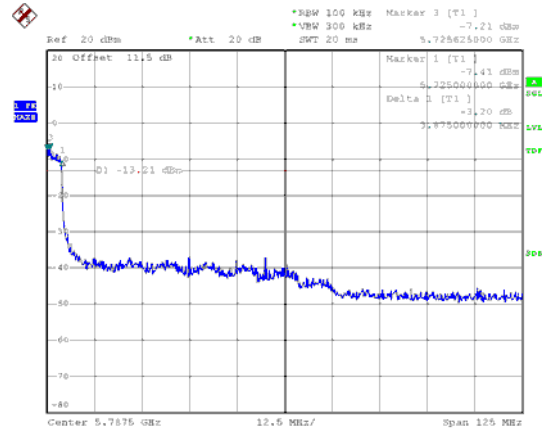

Modulation Type: 802.11ax HE20(7.3Mbps)
 CH144

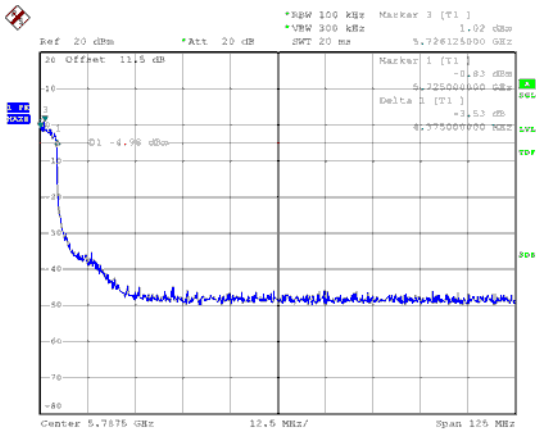


Modulation Type: 802.11ax HE40(14.6Mbps)
 CH142

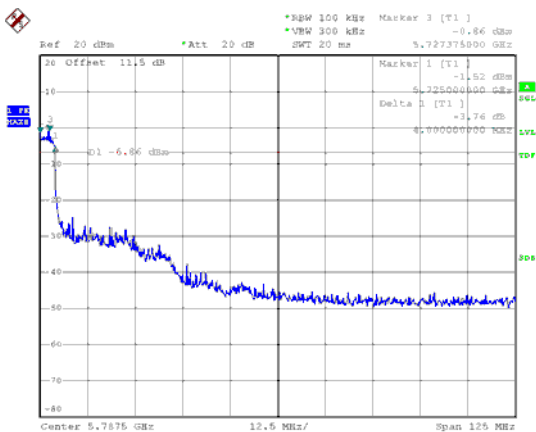





6dB Bandwidth-ANT B
 Extends across 5725MHz Band, Straddle Channel
 Modulation Type: 802.11a (6Mbps)
 CH144

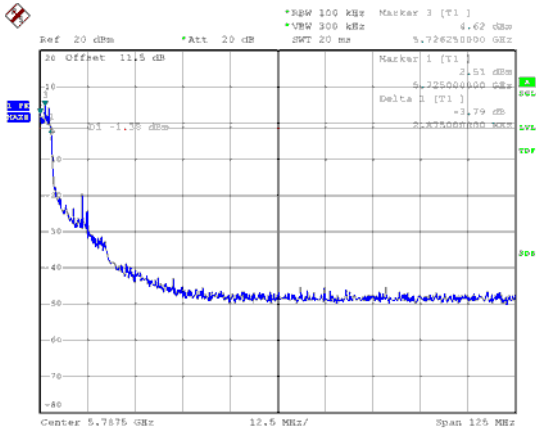


Modulation Type: 802.11ax HE80(30.6Mbps)
 CH138

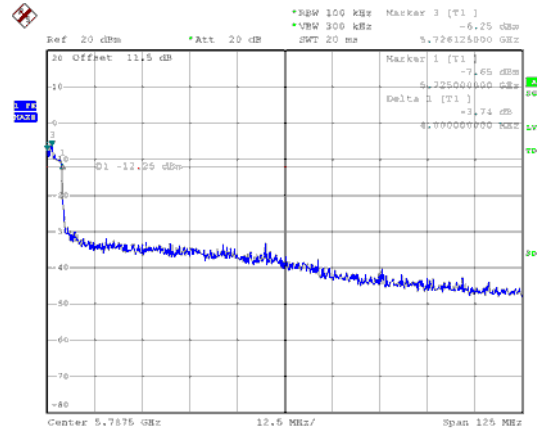

Modulation Type: 802.11ax HE20(7.3Mbps)
 CH144

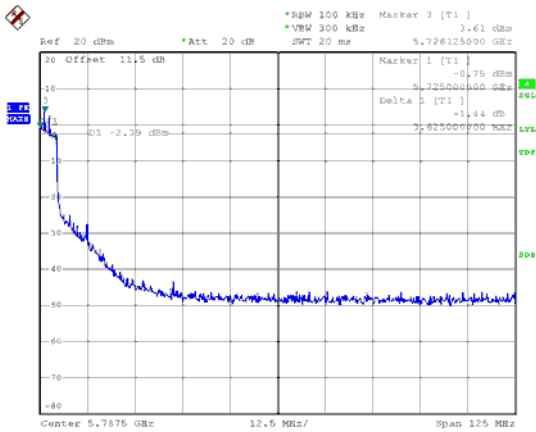


Modulation Type: 802.11ax HE40(14.6Mbps)
 CH142

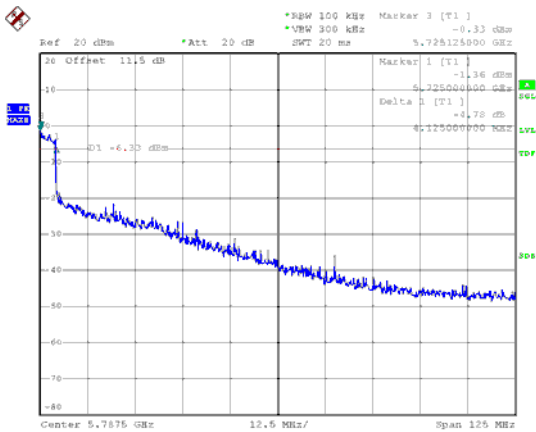





99% Occupied Bandwidth-ANT A
Modulation Type: 802.11a (6Mbps)
CH149

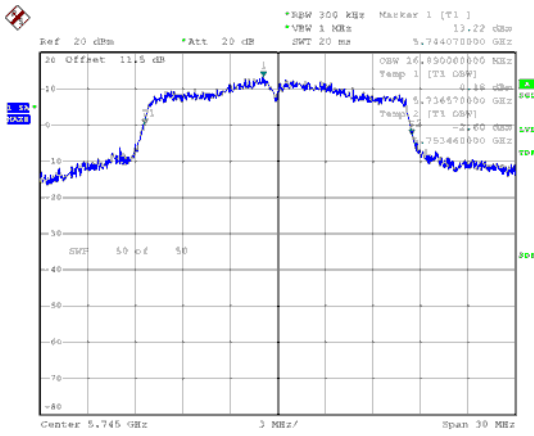


Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

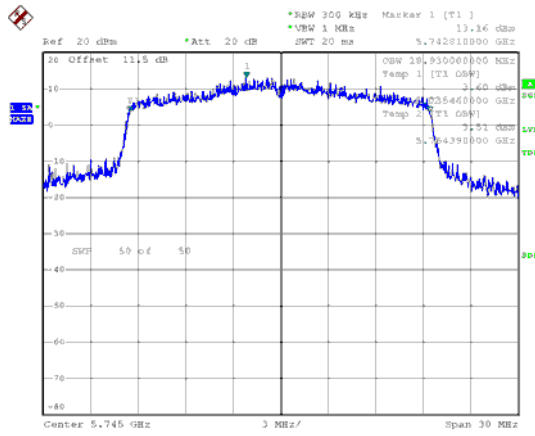


CH157

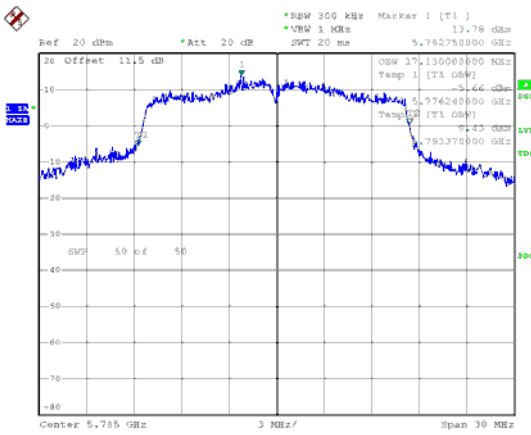


CH157

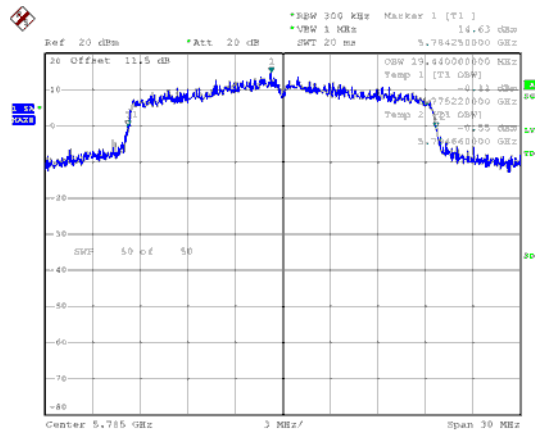

CH165

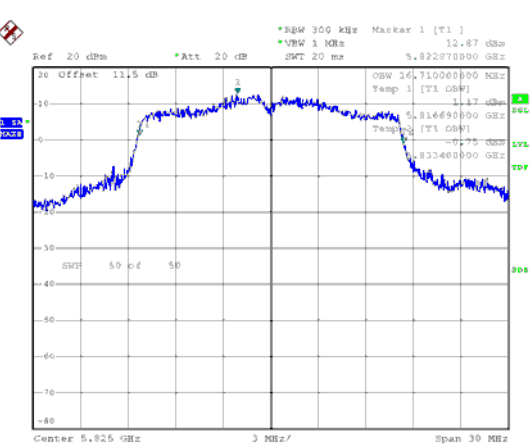


CH165

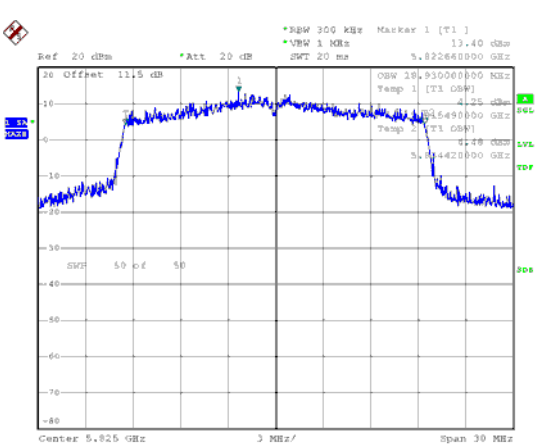





99% Occupied Bandwidth-ANT A
Modulation Type: 802.11ax HE40(14.6Mbps)
CH151

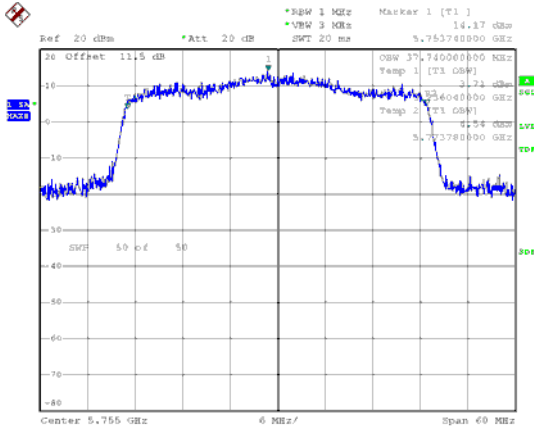

Modulation Type: 802.11ax HE80(30.6Mbps)
CH155

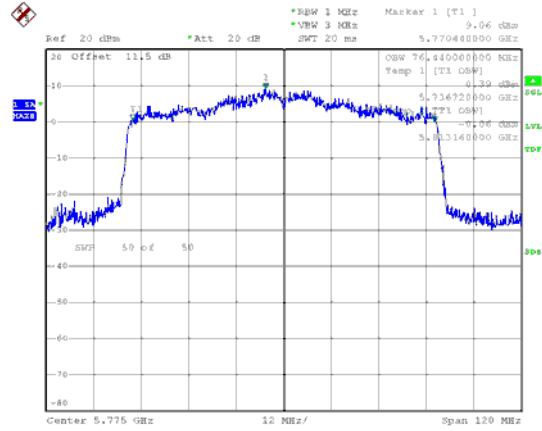


CH159

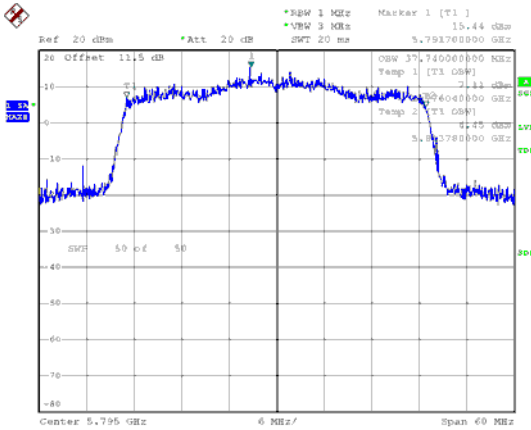





99% Occupied Bandwidth-ANT B
Modulation Type: 802.11a (6Mbps)
CH149

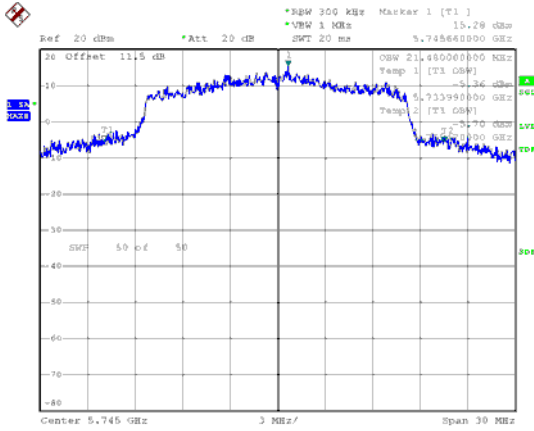


Modulation Type: 802.11ax HE20(7.3Mbps)
CH149

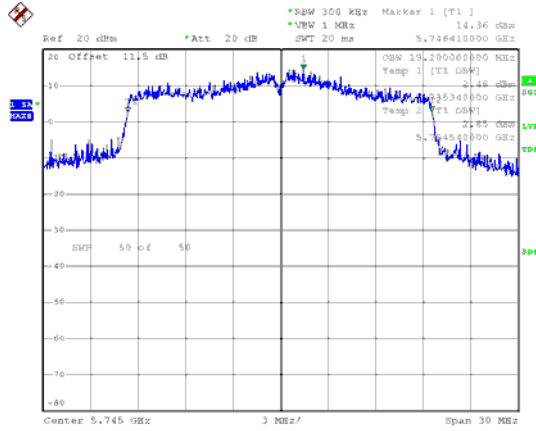


CH157

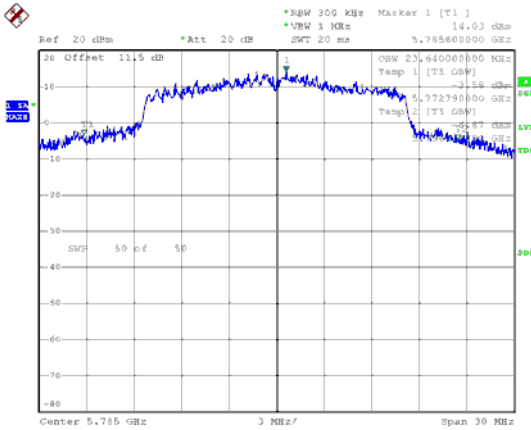


CH157

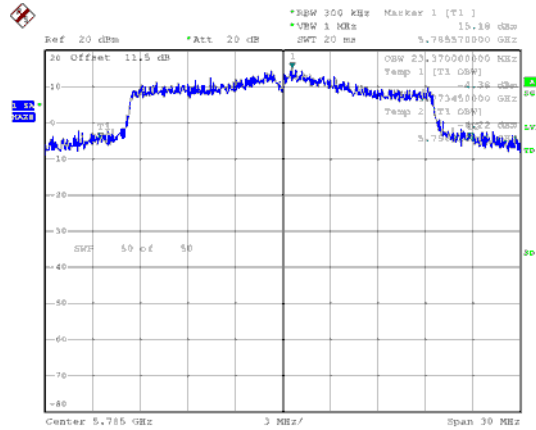

CH165

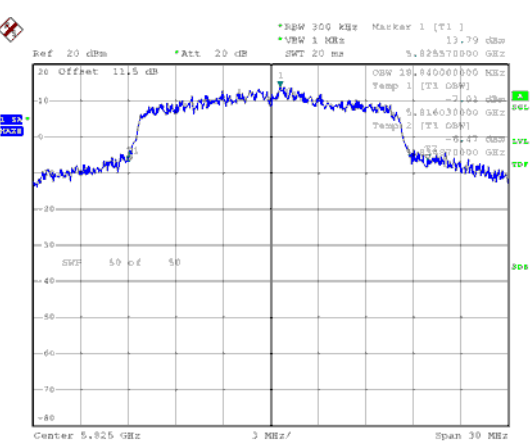


CH165

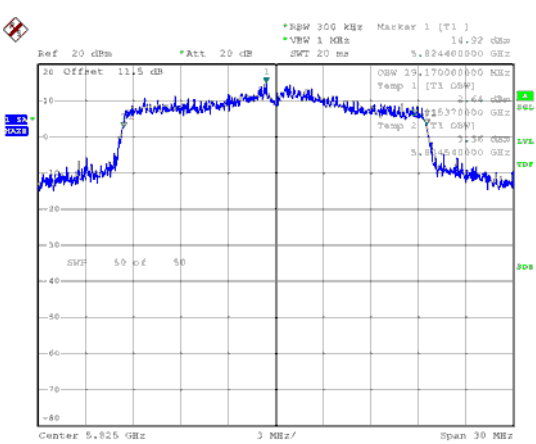





99% Occupied Bandwidth-ANT B
Modulation Type: 802.11ax HE40(14.6Mbps)
CH151

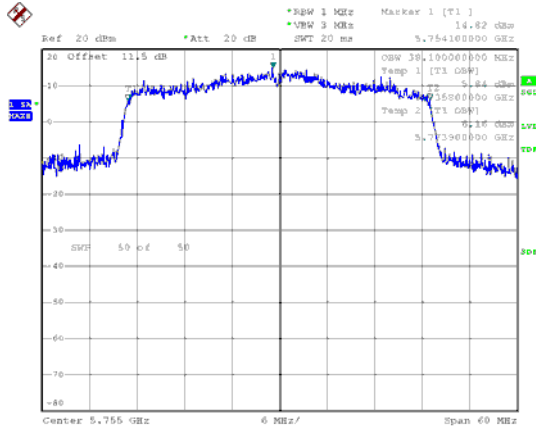

Modulation Type: 802.11ax HE80(30.6Mbps)
CH155

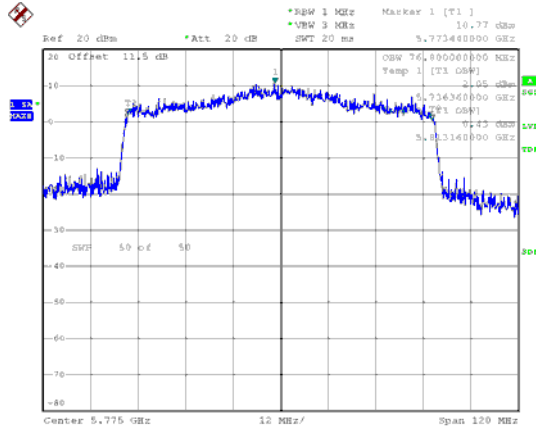

CH159

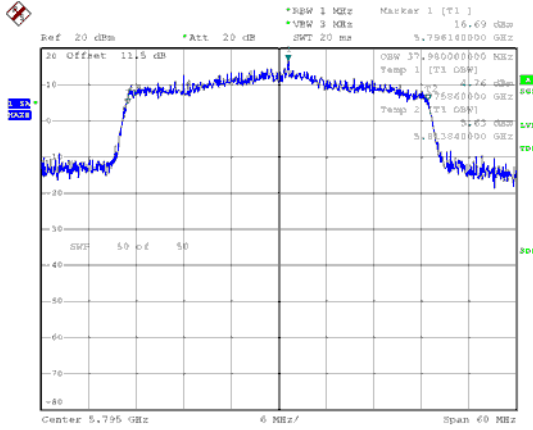





99% Bandwidth-ANT A

Extends across 5725MHz Band, Straddle Channel


Modulation Type: 802.11a (6Mbps)
CH144

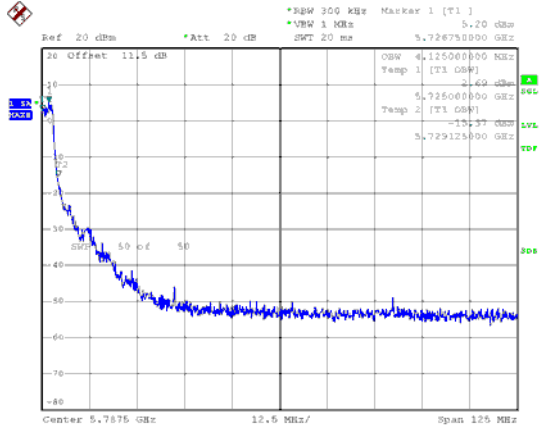


Modulation Type: 802.11ax HE80(30.6Mbps)
CH138

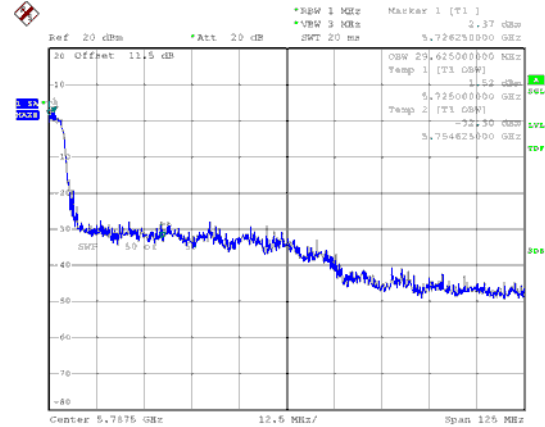

Modulation Type: 802.11ax HE20(7.3Mbps)
CH144

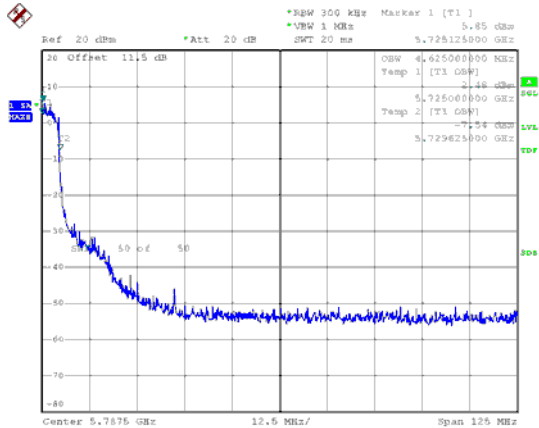

Modulation Type: 802.11ax HE40(14.6Mbps)
CH142

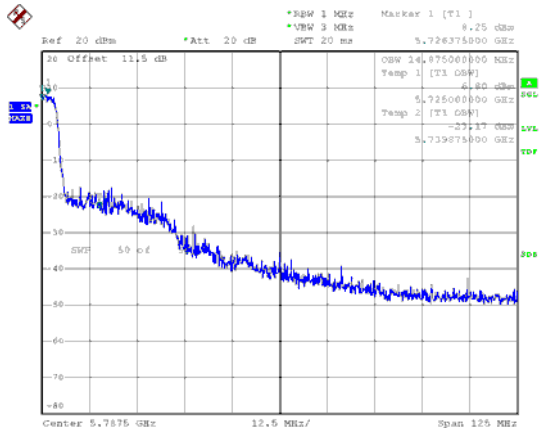





99% Bandwidth-ANT B

Extends across 5725MHz Band, Straddle Channel


Modulation Type: 802.11a (6Mbps)
CH144

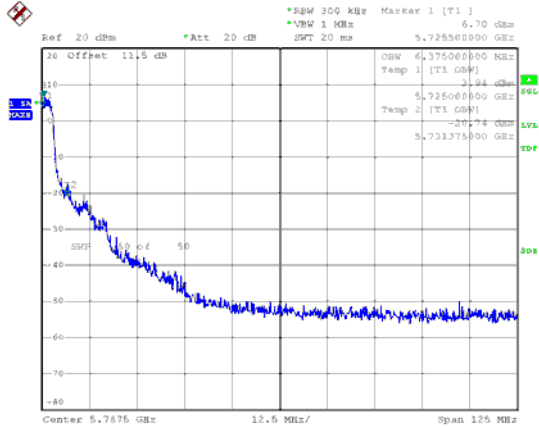


Modulation Type: 802.11ax HE80(30.6Mbps)
CH138

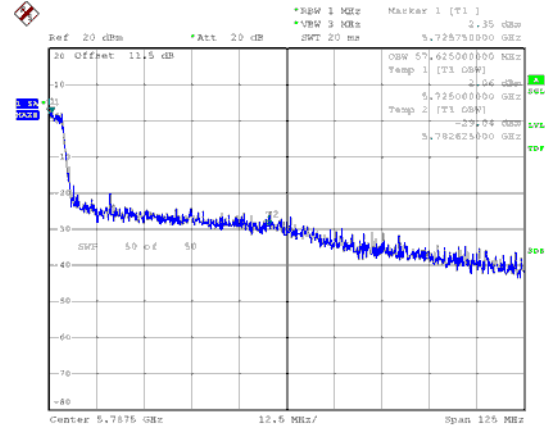

Modulation Type: 802.11ax HE20(7.3Mbps)
CH144

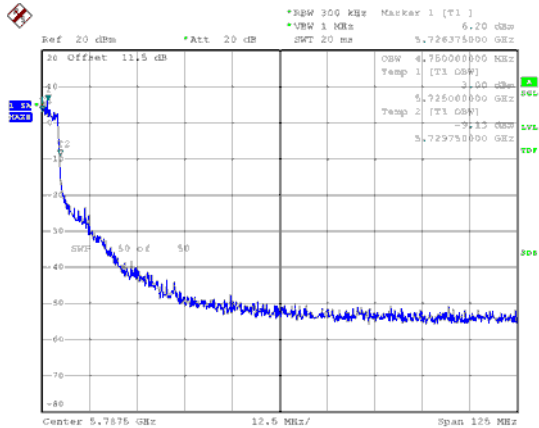

Modulation Type: 802.11ax HE40(14.6Mbps)
CH142

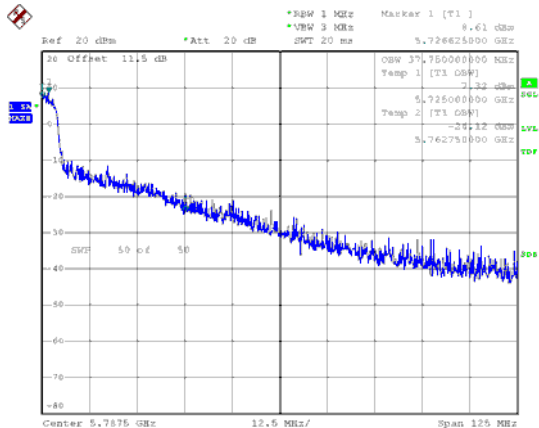



9. 26dB Bandwidth & 99% Occupied Bandwidth


9.1. Test Limit

None; for reporting purposes only.

9.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW = approximately 1% of the emission bandwidth, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

9.3. Test Setup Layout





9.4. Test Result and Data

In the 5.2G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT B
11a	36	5180	18.90	18.85
11a	40	5200	18.75	18.90
11a	48	5240	18.75	18.85
11ax HE20	36	5180	20.75	20.65
11ax HE20	40	5200	20.70	20.75
11ax HE20	48	5240	20.90	20.70
11ax HE40	38	5190	41.50	41.40
11ax HE40	46	5230	41.60	41.70
11ax HE80	42	5210	81.44	81.76

In the 5.3G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT B
11a	52	5260	18.90	18.80
11a	60	5300	18.80	18.90
11a	64	5320	18.90	18.75
11ax HE20	52	5260	20.90	26.80
11ax HE20	60	5300	20.75	20.60
11ax HE20	64	5320	20.70	20.60
11ax HE40	54	5270	41.90	41.40
11ax HE40	62	5310	41.30	41.50
11ax HE80	58	5290	82.24	81.92



In the 5.5G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT B
11a	100	5500	18.90	18.80
11a	120	5600	18.85	18.80
11a	140	5700	18.85	19.00
11ax HE20	100	5500	20.80	20.70
11ax HE20	120	5600	20.80	20.65
11ax HE20	140	5700	20.65	20.55
11ax HE40	102	5510	41.30	41.40
11ax HE40	118	5590	41.60	41.90
11ax HE40	134	5670	41.40	41.70
11ax HE80	106	5530	81.44	81.44
11ax HE80	122	5610	81.60	81.92

802.11ax(160)

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT B
11ax HE160	114	5570	166.32	165.60



In the 5.2G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11a	36	5180	16.29	16.29
11a	40	5200	16.32	16.32
11a	48	5240	16.35	16.29
11ax HE20	36	5180	18.87	18.84
11ax HE20	40	5200	18.84	18.87
11ax HE20	48	5240	18.81	18.87
11ax HE40	38	5190	37.74	37.68
11ax HE40	46	5230	37.68	37.68
11ax HE80	42	5210	76.56	76.80

In the 5.3G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11a	52	5260	16.32	16.29
11a	60	5300	16.35	16.35
11a	64	5320	16.32	16.35
11ax HE20	52	5260	18.84	19.02
11ax HE20	60	5300	18.84	18.78
11ax HE20	64	5320	18.84	18.84
11ax HE40	54	5270	37.68	37.68
11ax HE40	62	5310	37.68	37.68
11ax HE80	58	5290	76.56	76.56



In the 5.5G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11a	100	5500	16.32	16.35
11a	120	5600	16.29	16.32
11a	140	5700	16.35	16.35
11ax HE20	100	5500	18.81	18.81
11ax HE20	120	5600	18.78	18.81
11ax HE20	140	5700	18.75	18.81
11ax HE40	102	5510	37.56	37.56
11ax HE40	118	5590	37.74	37.86
11ax HE40	134	5670	37.68	37.68
11ax HE80	106	5530	76.44	76.56
11ax HE80	122	5610	76.44	76.32

802.11ax(160)

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT B
11ax HE160	114	5570	155.52	155.04



UNII Emission Bandwidth Result (Within 5470-5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)		99% Bandwidth(MHz)	
			ANT A	ANT B	ANT A	ANT B
11a	6 Mbps	5720	14.53	15.05	13.26	13.26
11ax HE20	NSS1-MCS0	5720	15.05	15.30	14.54	14.54
11ax HE40	NSS1-MCS0	5710	35.70	48.20	33.66	34.43
11ax HE80	NSS1-MCS0	5690	75.99	75.74	72.93	73.19



UNII Emission Bandwidth Result (Within 5150-5250MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)		99% Bandwidth(MHz)	
			ANT A	ANT B	ANT A	ANT B
11ax HE160	NSS1-MCS0	5250	83.50	83.90	78.50	78.40

UNII Emission Bandwidth Result (Extends across 5250MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)		99% Bandwidth(MHz)	
			ANT A	ANT B	ANT A	ANT B
11ax HE160	NSS1-MCS0	5250	82.90	83.30	78.20	78.30





26dB Bandwidth, Band 1-ANT A
Modulation Type: 802.11a (6Mbps)
CH36

Modulation Type: 802.11ax HE20(7.3Mbps)
CH36

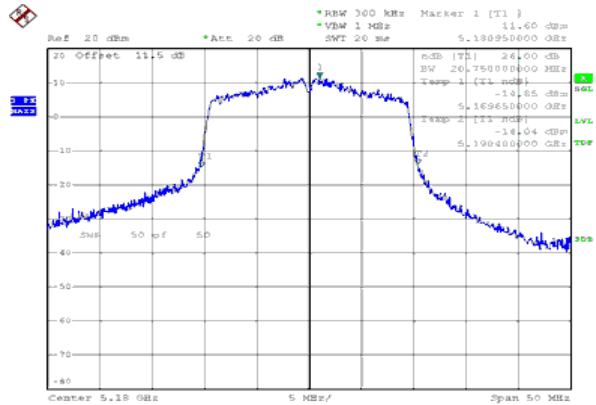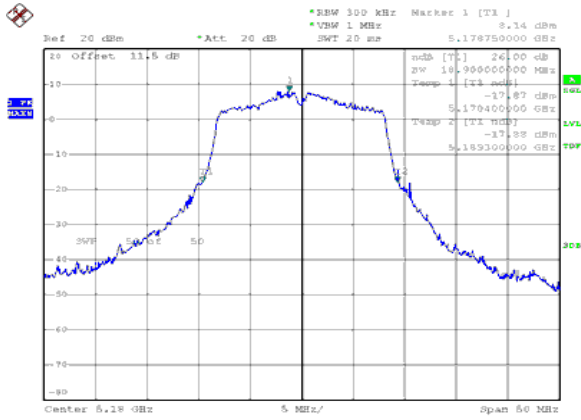



CH40

CH40

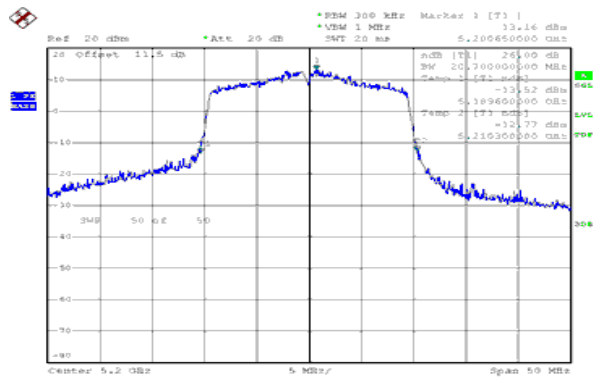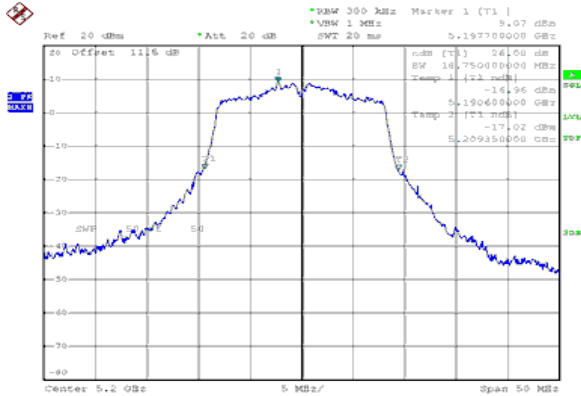

CH48



CH48

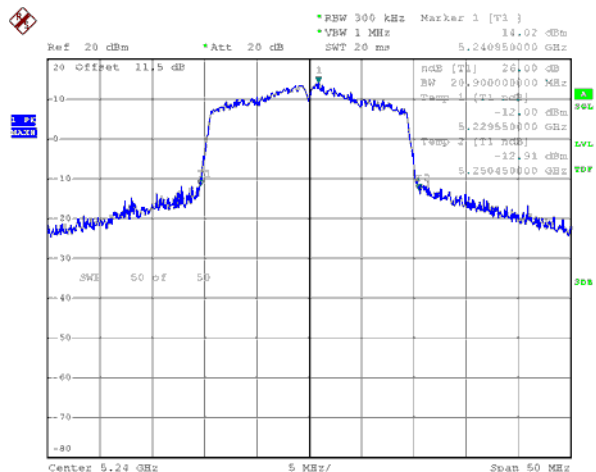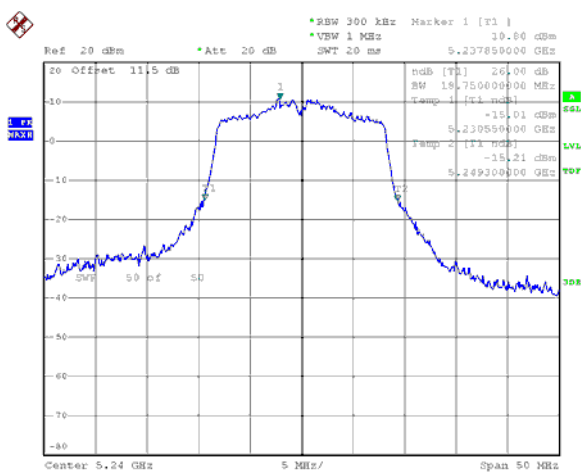




26dB Bandwidth, Band 1-ANT A
Modulation Type: 802.11ax HE40(14.6Mbps)
CH38

Modulation Type: 802.11ax HE80(30.6Mbps)
CH42

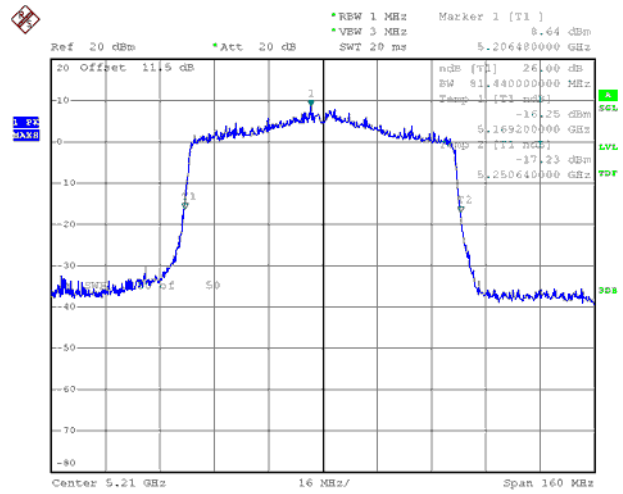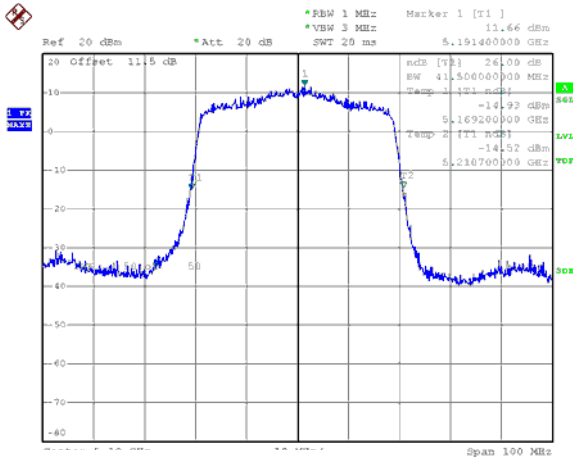


CH46

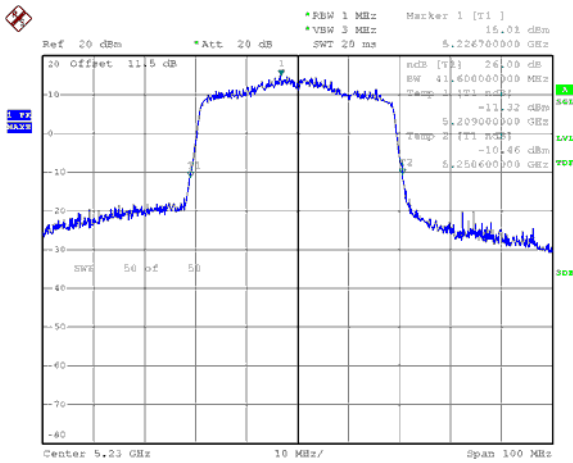





26dB Bandwidth, Band 1-ANT B
Modulation Type: 802.11a (6Mbps)
CH36

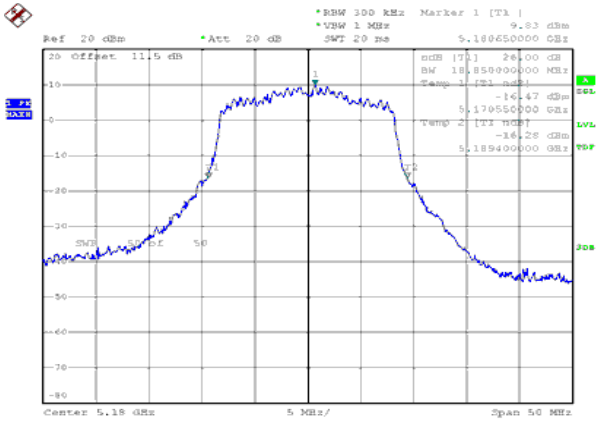


Modulation Type: 802.11ax HE20(7.3Mbps)
CH36

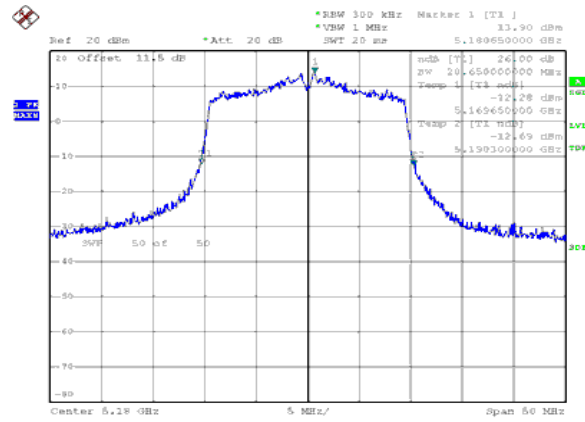


CH40

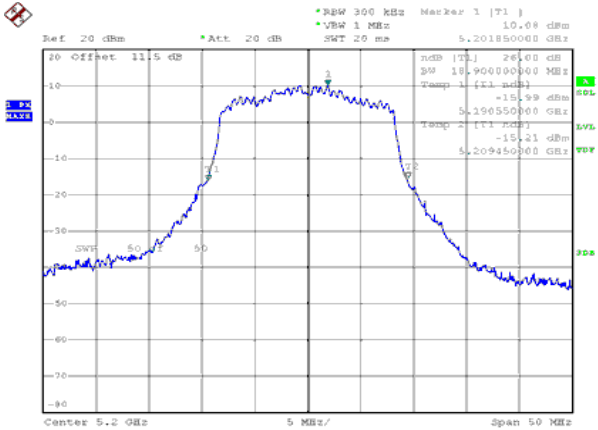


CH40

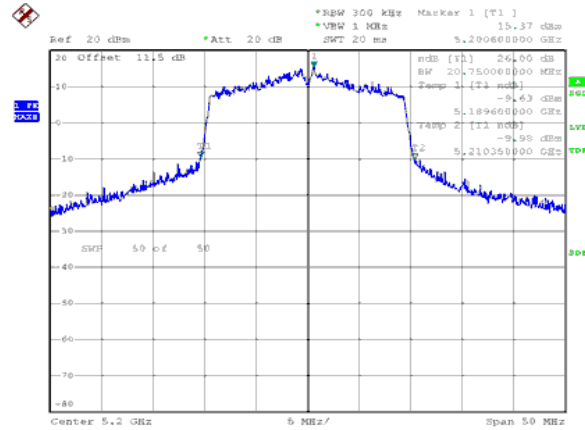

CH48

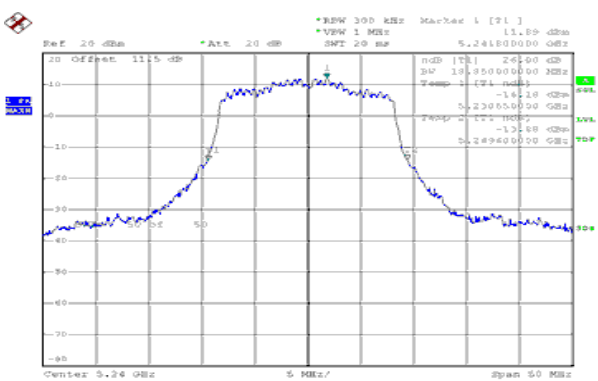



CH48

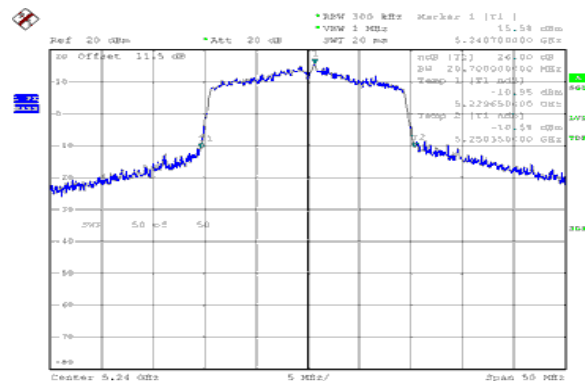




26dB Bandwidth, Band 1- ANT B
Modulation Type: 802.11ax HE40(14.6Mbps)
CH38

Modulation Type: 802.11ax HE80(30.6Mbps)
CH42

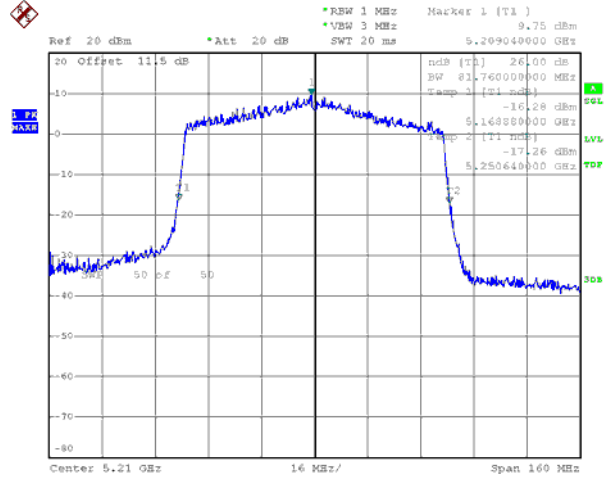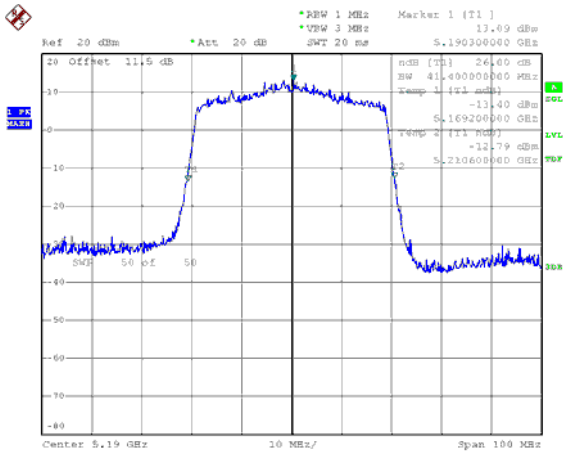



CH46

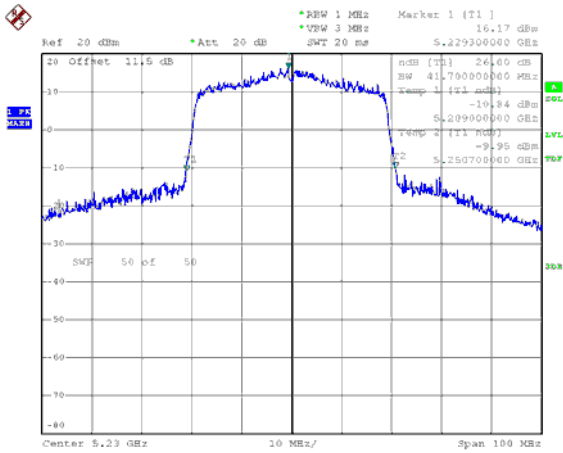





26dB Bandwidth, Band 2-ANT A
Modulation Type: 802.11a (6Mbps)
CH52

Modulation Type: 802.11ax HE20(7.3Mbps)
CH52

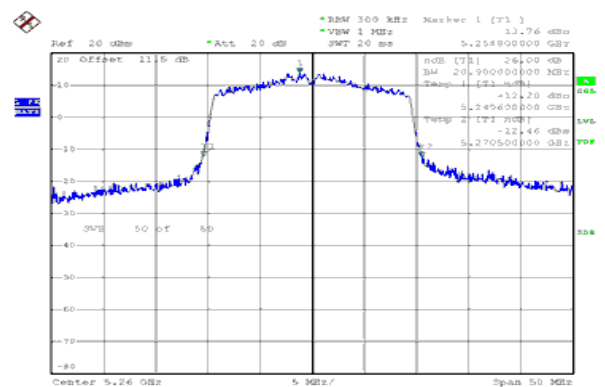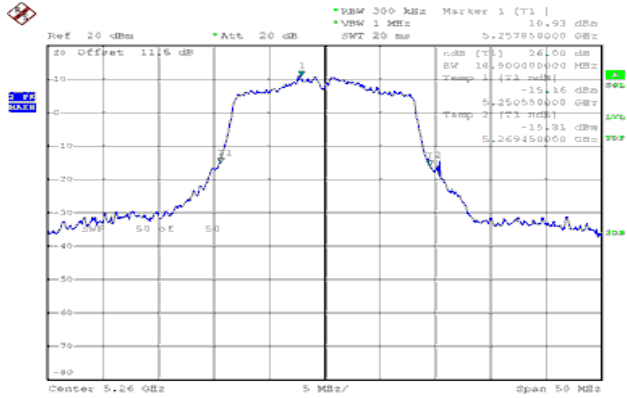



CH60

CH60

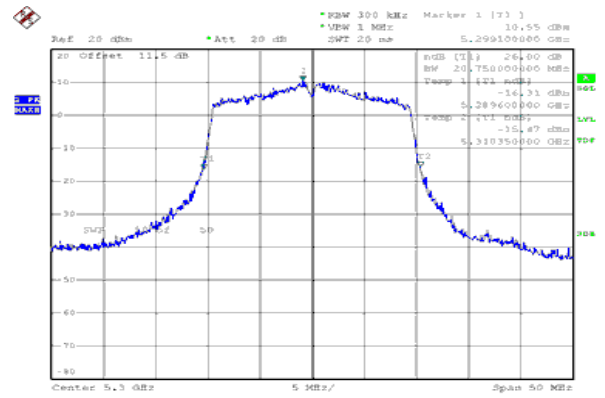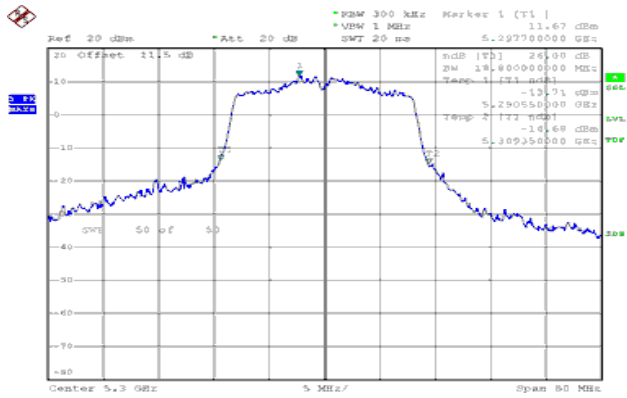

CH64



CH64

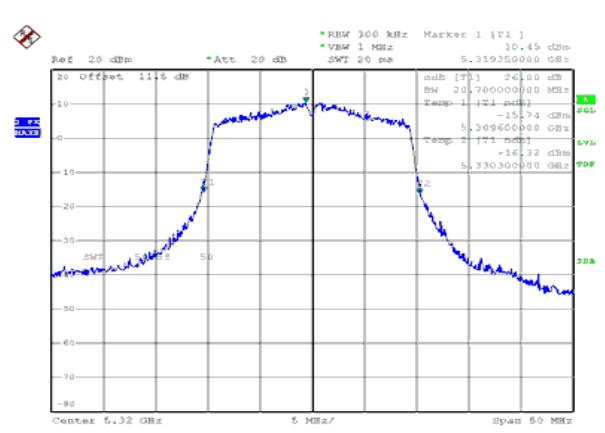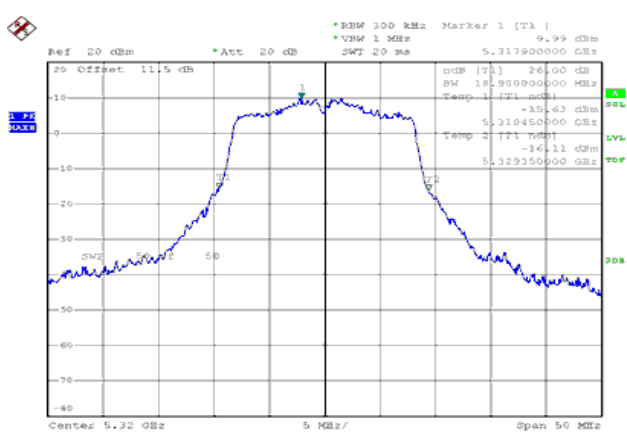




26dB Bandwidth, Band 2-ANT A
Modulation Type: 802.11ax HE40(14.6Mbps)
CH54

Modulation Type: 802.11ax HE80(30.6Mbps)
CH58

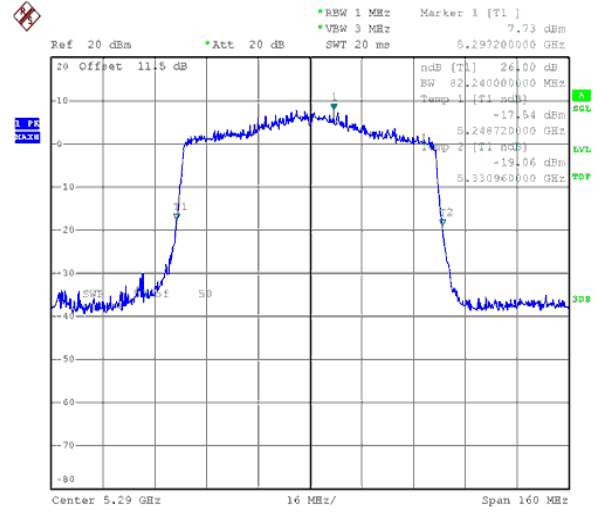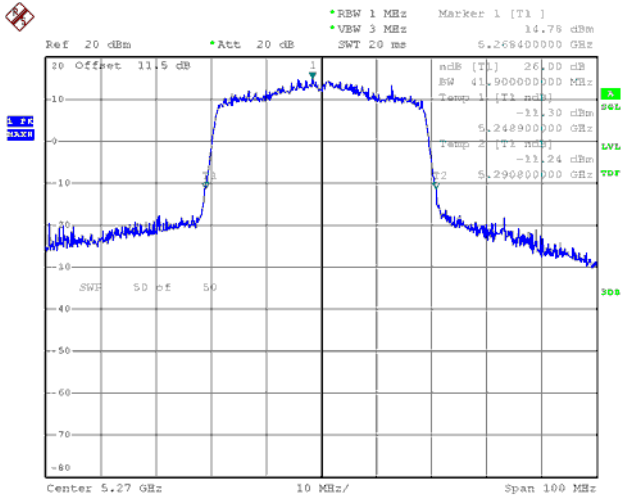


CH62

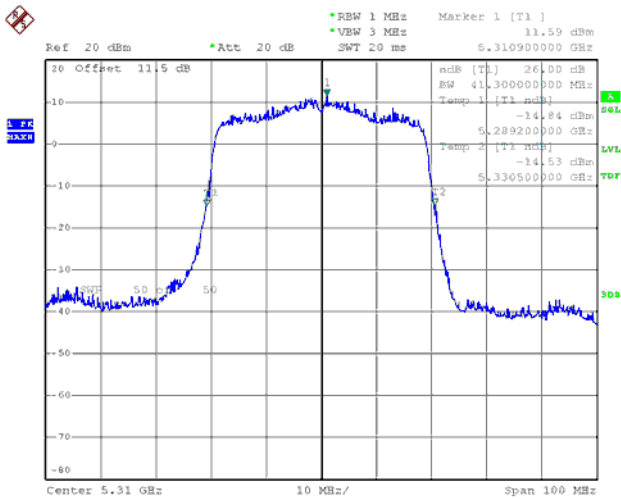





26dB Bandwidth, Band 2- ANT B
Modulation Type: 802.11a (6Mbps)
CH52

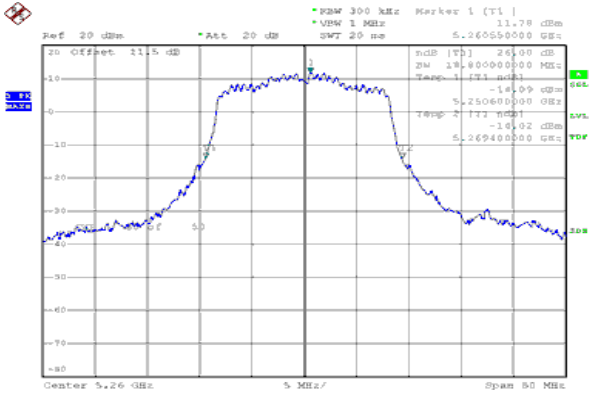


Modulation Type: 802.11ax HE20(7.3Mbps)
CH52

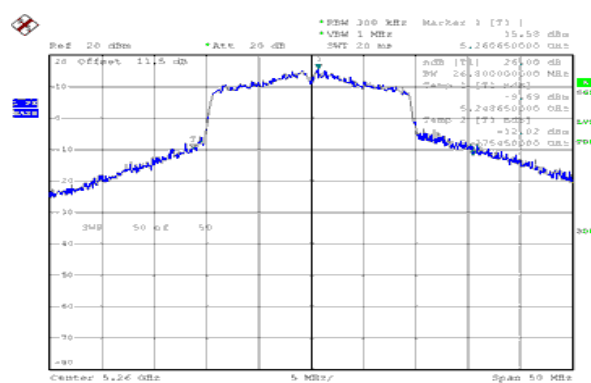

CH60

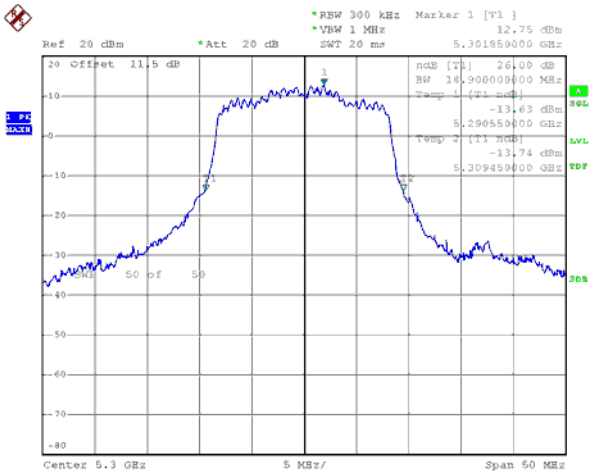


CH60

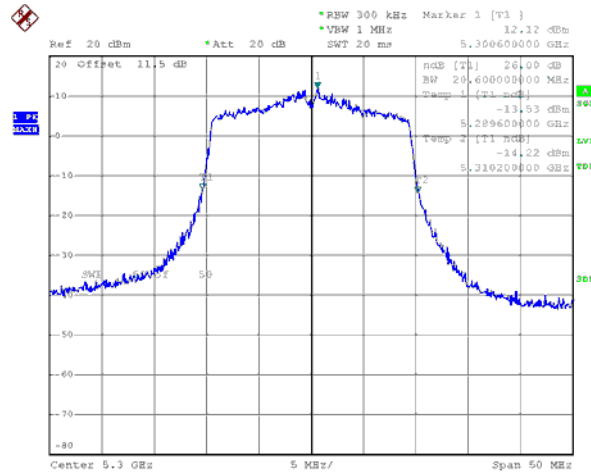


Da

CH64

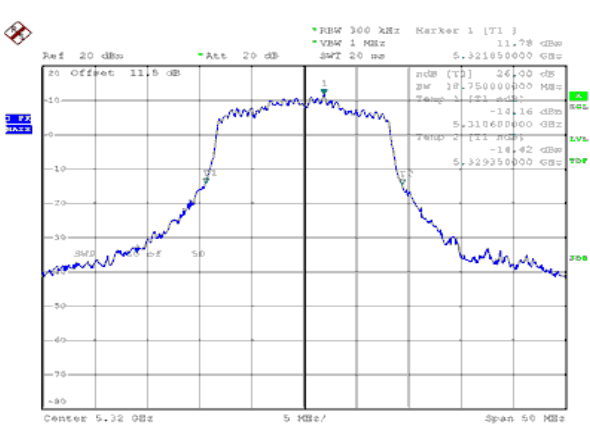


CH64

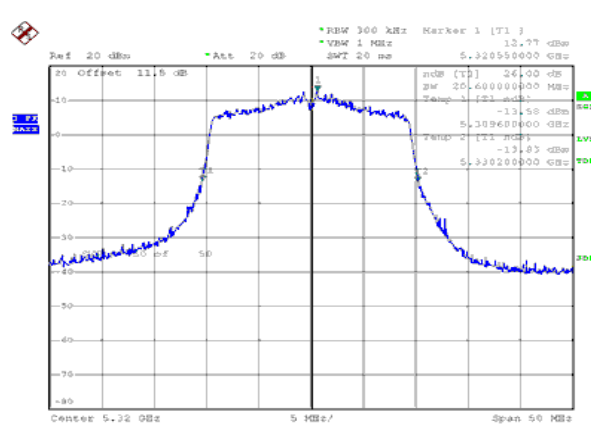





26dB Bandwidth, Band 2- ANT B
Modulation Type: 802.11ax HE40(14.6Mbps)
CH54

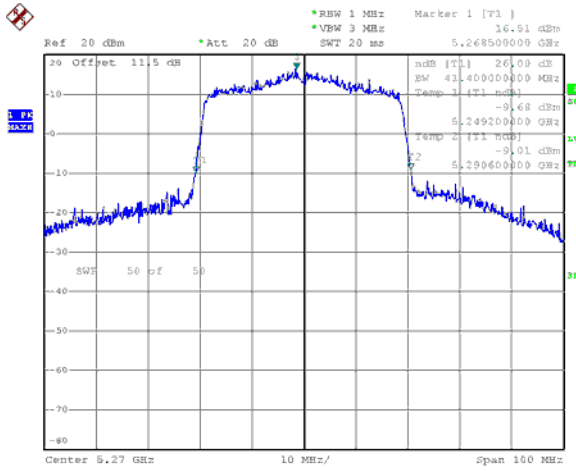

Modulation Type: 802.11ax HE80(30.6Mbps)
CH58

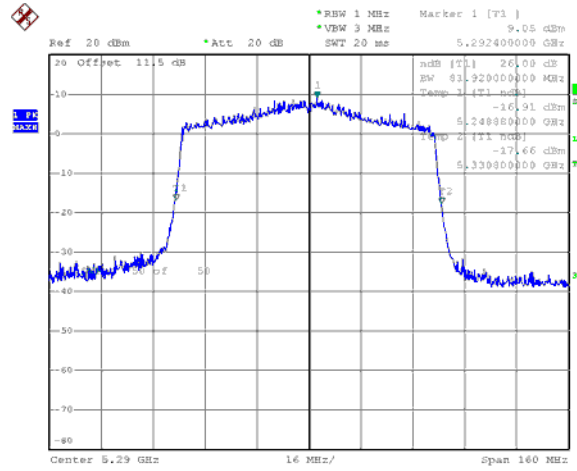



CH62

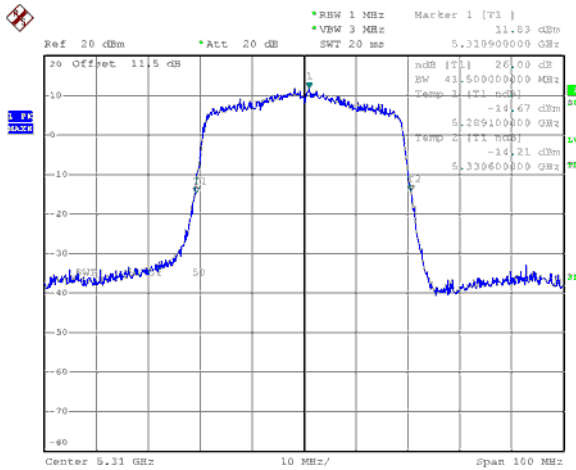




26dB Bandwidth, Band 3-ANT A
Modulation Type: 802.11a (6Mbps)
CH100


Modulation Type: 802.11ax HE20(7.3Mbps)
CH100

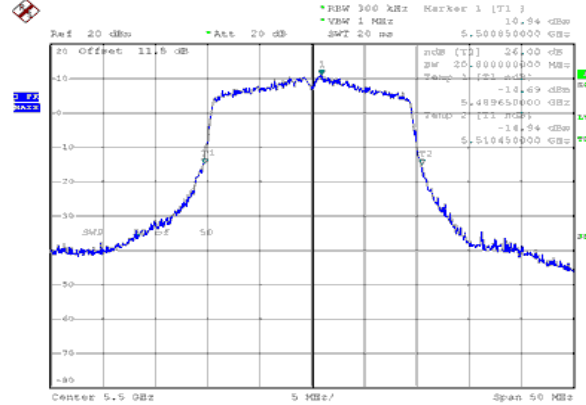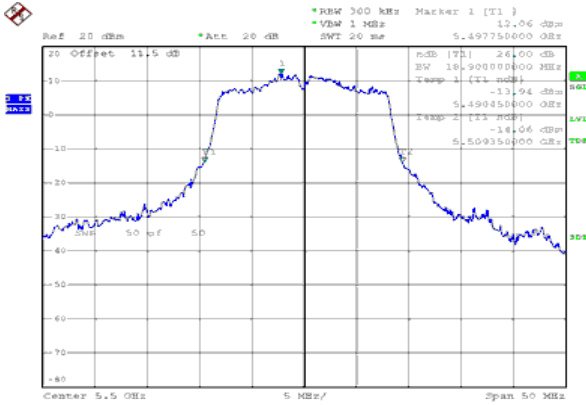


CH120

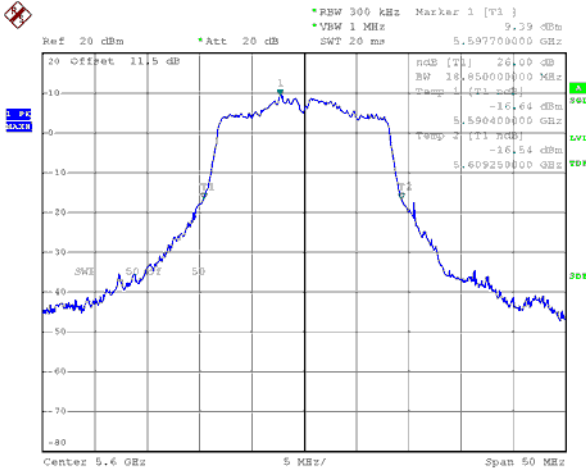

CH120

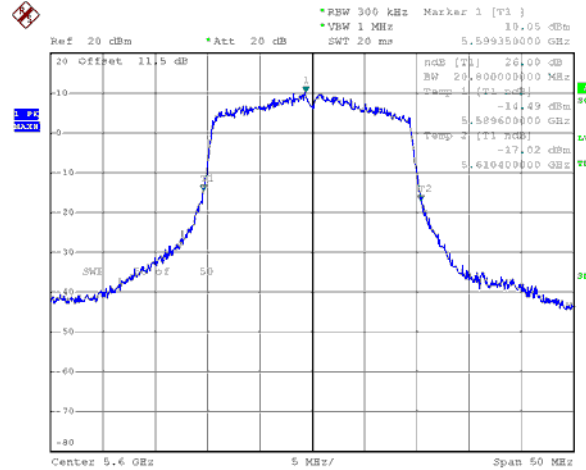

CH140

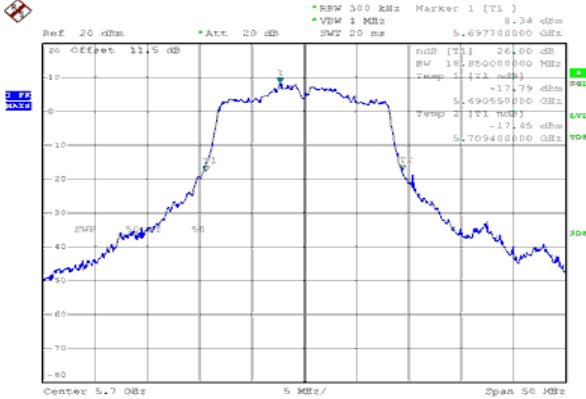

CH140

