




Test Mode : 2TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

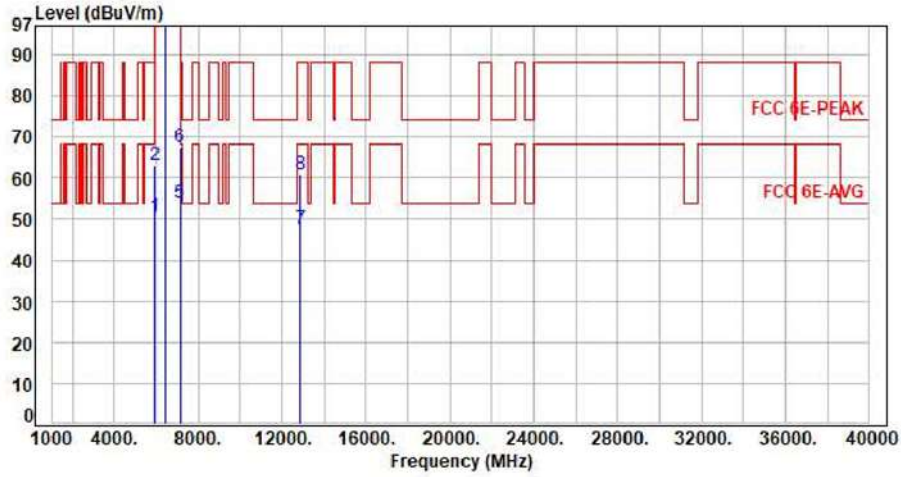


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.89	50.62	68.20	-17.58	Average	245	49	P
2	5925.00	7.73	55.44	63.17	88.20	-25.03	Peak	245	49	P
3	6435.00	8.36	96.98	105.34	200.00	-94.66	Average	245	49	P
4	6435.00	8.36	109.64	118.00	200.00	-82.00	Peak	245	49	P
5	7125.00	11.08	42.76	53.84	68.20	-14.36	Average	245	49	P
6	7125.00	11.08	56.42	67.50	88.20	-20.70	Peak	245	49	P
7	12870.00	18.35	29.08	47.43	68.20	-20.77	Average	100	118	P
8	12870.00	18.35	42.68	61.03	88.20	-27.17	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

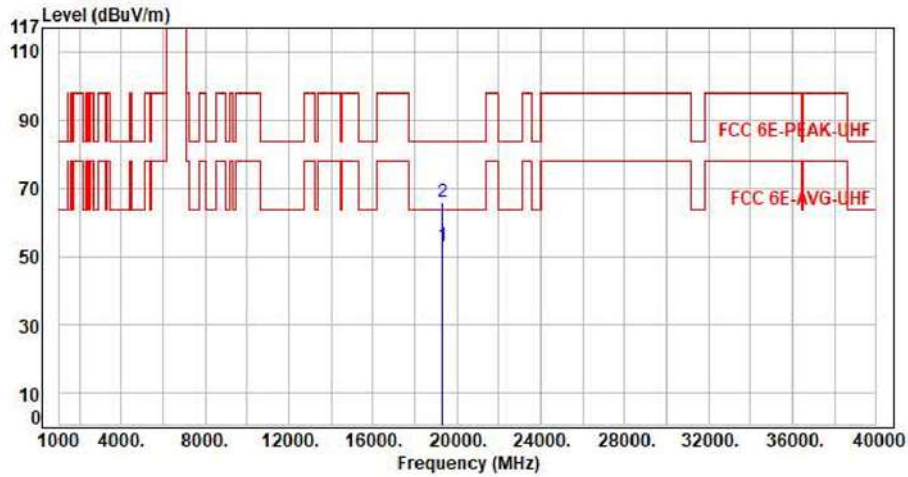


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	41.33	52.94	63.54	-10.60	Average	150	360	P
2	19305.00	11.61	54.19	65.80	83.54	-17.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

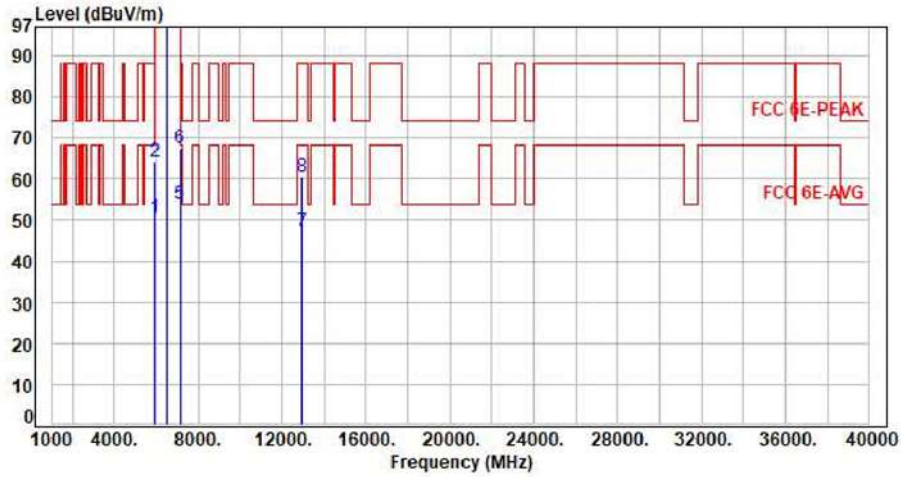


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.75	50.48	68.20	-17.72	Average	152	8	P
2	5925.00	7.73	56.27	64.00	88.20	-24.20	Peak	152	8	P
3	6475.00	8.34	96.83	105.17	200.00	-94.83	Average	152	8	P
4	6475.00	8.34	106.45	114.79	200.00	-85.21	Peak	152	8	P
5	7125.00	11.08	42.75	53.83	68.20	-14.37	Average	152	8	P
6	7125.00	11.08	56.34	67.42	88.20	-20.78	Peak	152	8	P
7	12950.00	18.75	28.55	47.30	68.20	-20.90	Average	100	118	P
8	12950.00	18.75	41.75	60.50	88.20	-27.70	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

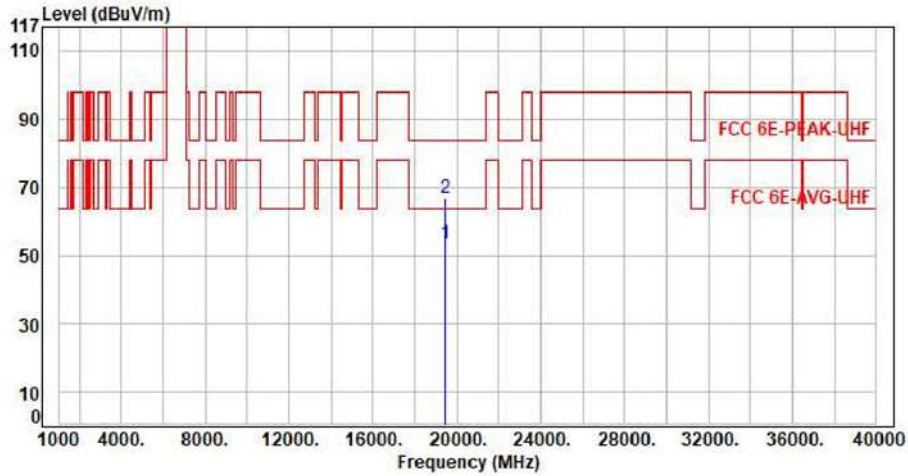


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	41.85	53.60	63.54	-9.94	Average	150	360	P
2	19425.00	11.75	54.82	66.57	83.54	-16.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

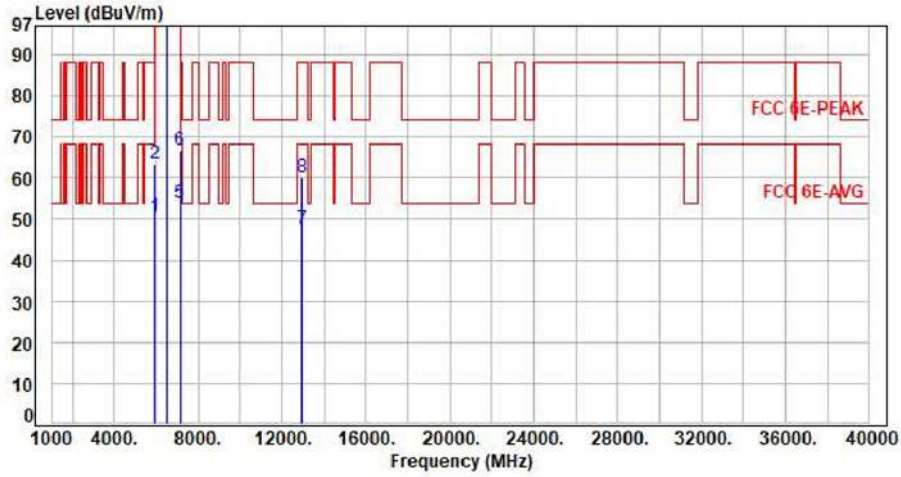


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.78	50.51	68.20	-17.69	Average	258	59	P
2	5925.00	7.73	55.60	63.33	88.20	-24.87	Peak	258	59	P
3	6475.00	8.34	100.77	109.11	200.00	-90.89	Average	258	59	P
4	6475.00	8.34	110.44	118.78	200.00	-81.22	Peak	258	59	P
5	7125.00	11.08	42.76	53.84	68.20	-14.36	Average	258	59	P
6	7125.00	11.08	55.56	66.64	88.20	-21.56	Peak	258	59	P
7	12950.00	18.75	28.75	47.50	68.20	-20.70	Average	100	114	P
8	12950.00	18.75	41.35	60.10	88.20	-28.10	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

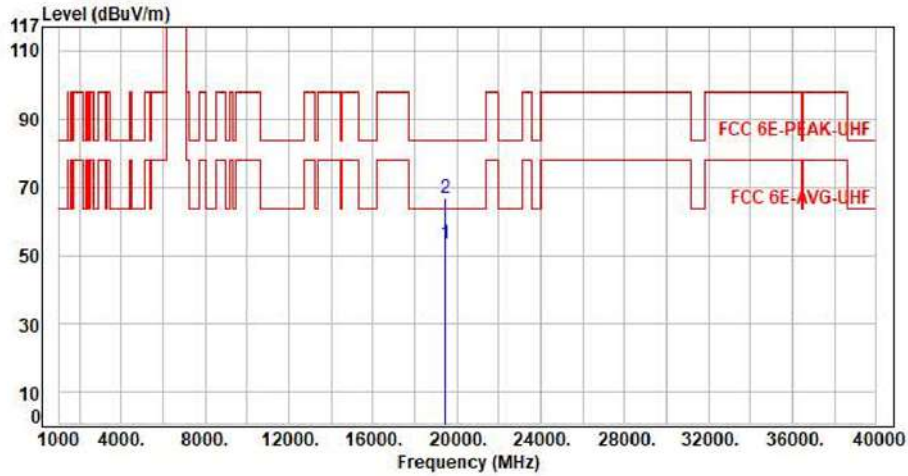


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	41.52	53.27	63.54	-10.27	Average	150	360	P
2	19425.00	11.75	54.82	66.57	83.54	-16.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

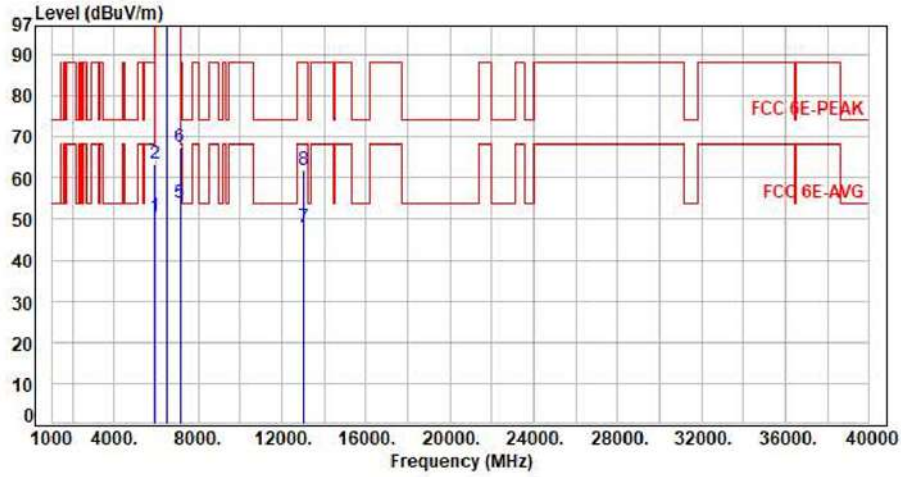


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.81	50.54	68.20	-17.66	Average	157	11	P
2	5925.00	7.73	55.73	63.46	88.20	-24.74	Peak	157	11	P
3	6515.00	8.45	96.93	105.38	200.00	-94.62	Average	157	11	P
4	6515.00	8.45	106.03	114.48	200.00	-85.52	Peak	157	11	P
5	7125.00	11.08	42.71	53.79	68.20	-14.41	Average	157	11	P
6	7125.00	11.08	56.41	67.49	88.20	-20.71	Peak	157	11	P
7	13030.00	19.06	28.94	48.00	68.20	-20.20	Average	100	114	P
8	13030.00	19.06	43.01	62.07	88.20	-26.13	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

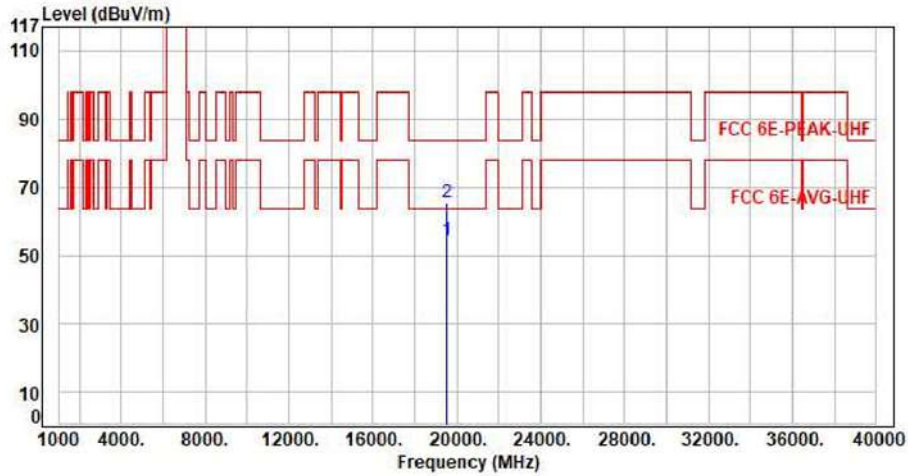


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	42.08	54.27	63.54	-9.27	Average	150	360	P
2	19545.00	12.19	53.09	65.28	83.54	-18.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

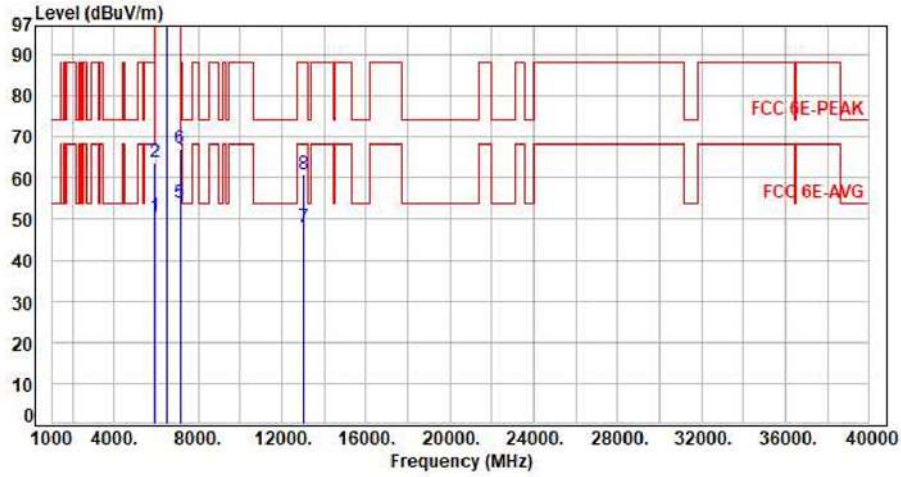


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.87	50.60	68.20	-17.60	Average	258	56	P
2	5925.00	7.73	56.20	63.93	88.20	-24.27	Peak	258	56	P
3	6515.00	8.45	101.51	109.96	200.00	-90.04	Average	258	56	P
4	6515.00	8.45	111.11	119.56	200.00	-80.44	Peak	258	56	P
5	7125.00	11.08	42.73	53.81	68.20	-14.39	Average	258	56	P
6	7125.00	11.08	56.07	67.15	88.20	-21.05	Peak	258	56	P
7	13030.00	19.06	29.05	48.11	68.20	-20.09	Average	100	133	P
8	13030.00	19.06	41.78	60.84	88.20	-27.36	Peak	100	133	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

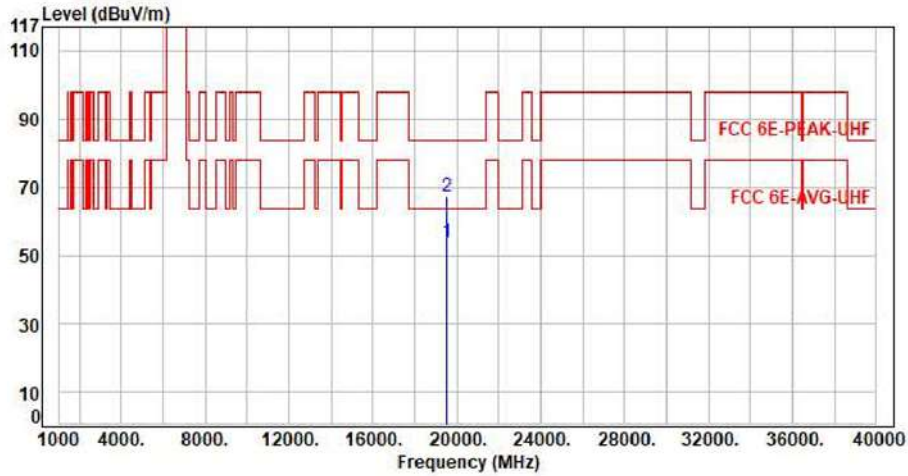


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	41.64	53.83	63.54	-9.71	Average	150	360	P
2	19545.00	12.19	54.92	67.11	83.54	-16.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

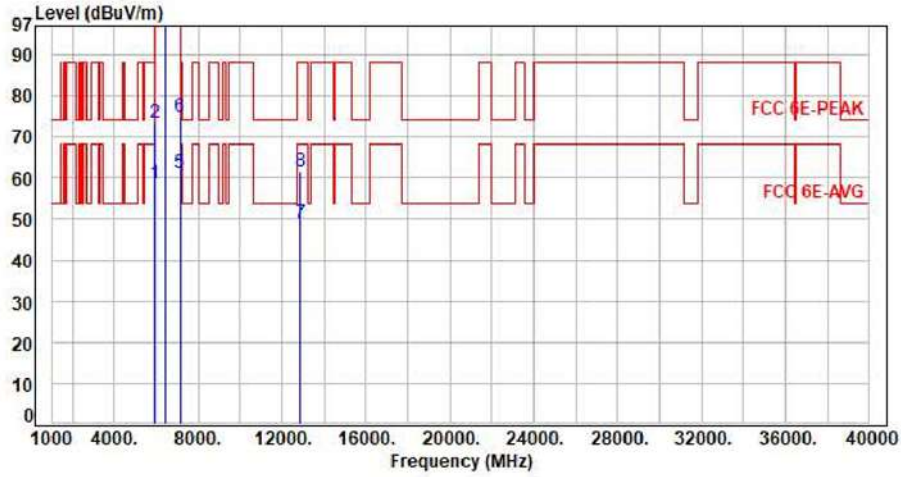


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.03	58.76	68.20	-9.44	Average	120	8	P
2	5925.00	7.73	65.78	73.51	88.20	-14.69	Peak	120	8	P
3	6435.00	8.36	99.55	107.91	200.00	-92.09	Average	120	8	P
4	6435.00	8.36	113.67	122.03	200.00	-77.97	Peak	120	8	P
5	7125.00	11.08	50.24	61.32	68.20	-6.88	Average	120	8	P
6	7125.00	11.08	63.87	74.95	88.20	-13.25	Peak	120	8	P
7	12870.00	18.35	30.59	48.94	68.20	-19.26	Average	100	128	P
8	12870.00	18.35	43.12	61.47	88.20	-26.73	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

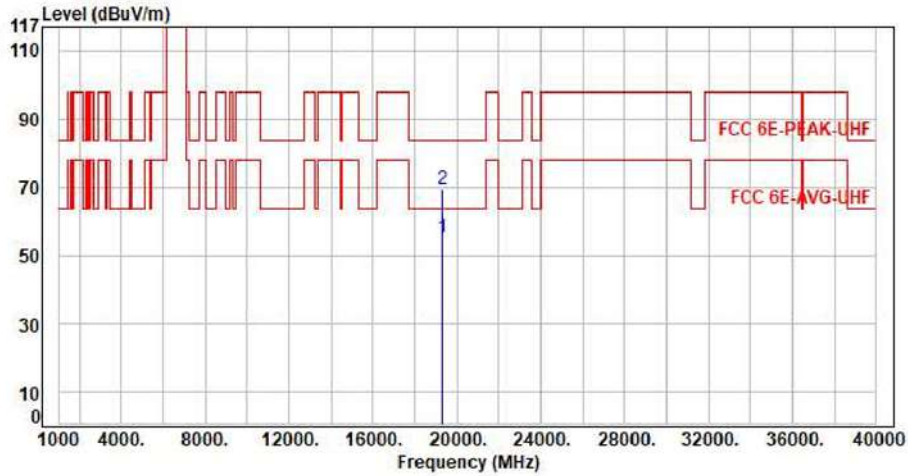


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	43.72	55.33	63.54	-8.21	Average	150	360	P
2	19305.00	11.61	57.63	69.24	83.54	-14.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

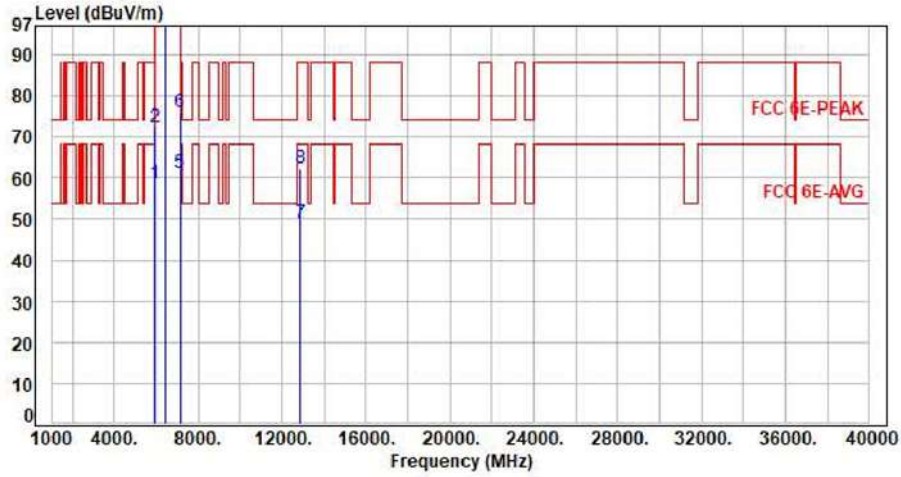


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.05	58.78	68.20	-9.42	Average	252	52	P
2	5925.00	7.73	64.63	72.36	88.20	-15.84	Peak	252	52	P
3	6435.00	8.36	102.52	110.88	200.00	-89.12	Average	252	52	P
4	6435.00	8.36	116.50	124.86	200.00	-75.14	Peak	252	52	P
5	7125.00	11.08	50.25	61.33	68.20	-6.87	Average	252	52	P
6	7125.00	11.08	64.81	75.89	88.20	-12.31	Peak	252	52	P
7	12870.00	18.35	30.73	49.08	68.20	-19.12	Average	100	222	P
8	12870.00	18.35	44.09	62.44	88.20	-25.76	Peak	100	222	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

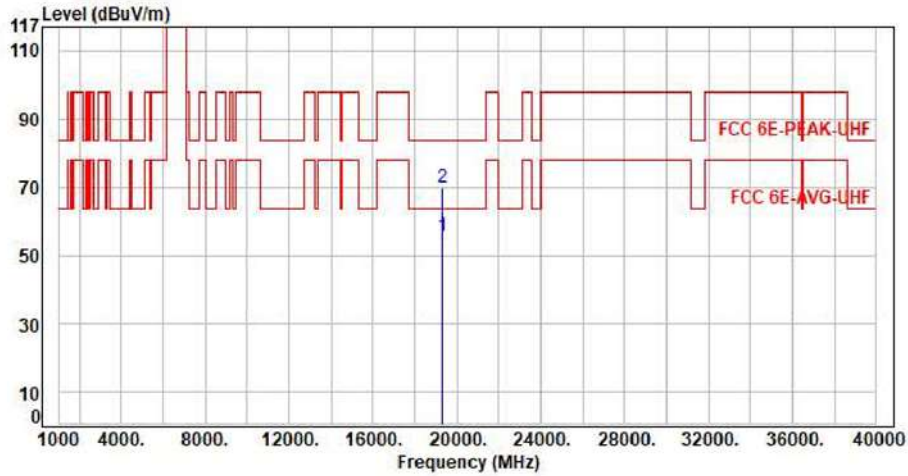


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	43.84	55.45	63.54	-8.09	Average	150	360	P
2	19305.00	11.61	58.05	69.66	83.54	-13.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

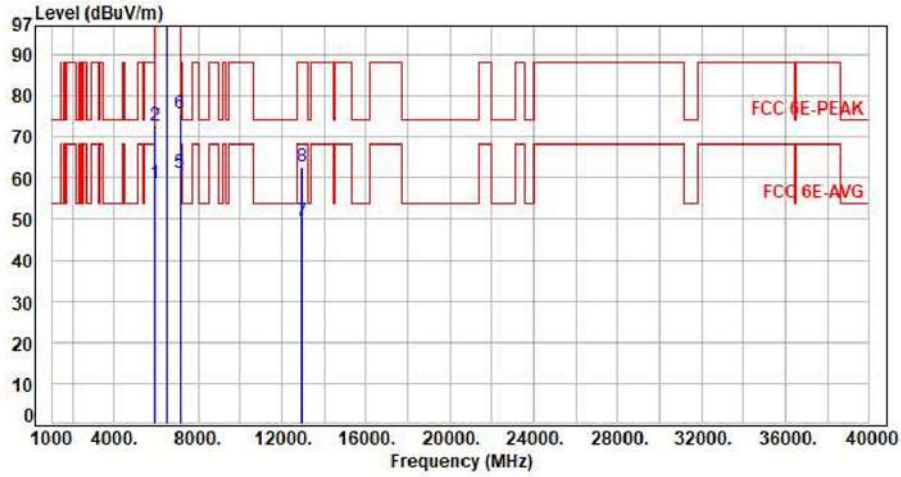


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.03	58.76	68.20	-9.44	Average	116	8	P
2	5925.00	7.73	64.87	72.60	88.20	-15.60	Peak	116	8	P
3	6475.00	8.34	99.34	107.68	200.00	-92.32	Average	116	8	P
4	6475.00	8.34	113.23	121.57	200.00	-78.43	Peak	116	8	P
5	7125.00	11.08	50.24	61.32	68.20	-6.88	Average	116	8	P
6	7125.00	11.08	64.51	75.59	88.20	-12.61	Peak	116	8	P
7	12950.00	18.75	30.57	49.32	68.20	-18.88	Average	100	124	P
8	12950.00	18.75	43.94	62.69	88.20	-25.51	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

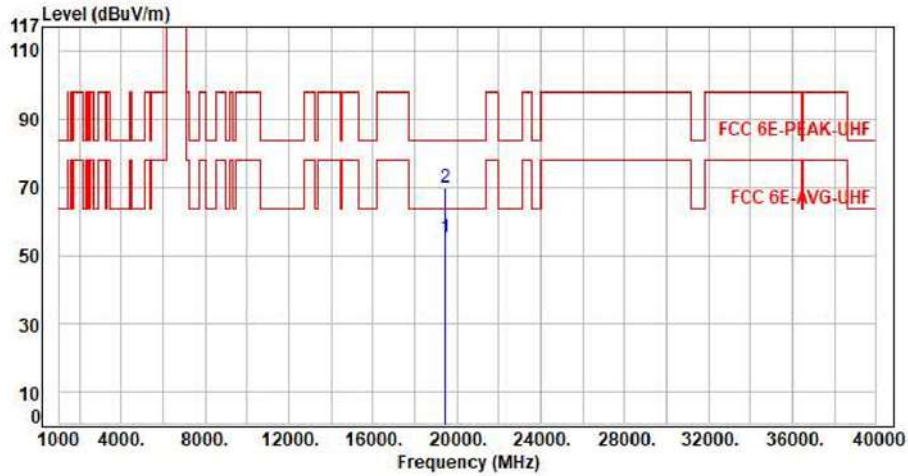


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	43.56	55.31	63.54	-8.23	Average	150	360	P
2	19425.00	11.75	58.17	69.92	83.54	-13.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

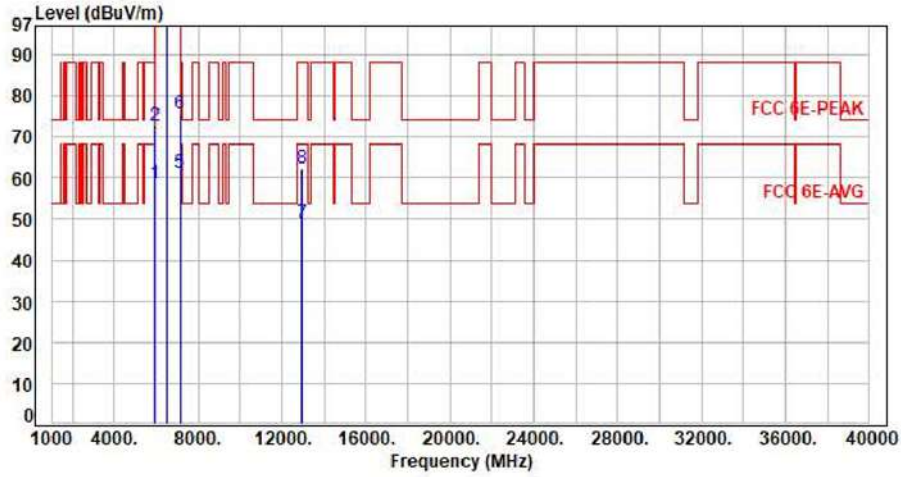


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.03	58.76	68.20	-9.44	Average	259	53	P
2	5925.00	7.73	64.97	72.70	88.20	-15.50	Peak	259	53	P
3	6475.00	8.34	101.94	110.28	200.00	-89.72	Average	259	53	P
4	6475.00	8.34	115.94	124.28	200.00	-75.72	Peak	259	53	P
5	7125.00	11.08	50.23	61.31	68.20	-6.89	Average	259	53	P
6	7125.00	11.08	64.41	75.49	88.20	-12.71	Peak	259	53	P
7	12950.00	18.75	30.36	49.11	68.20	-19.09	Average	100	224	P
8	12950.00	18.75	43.65	62.40	88.20	-25.80	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

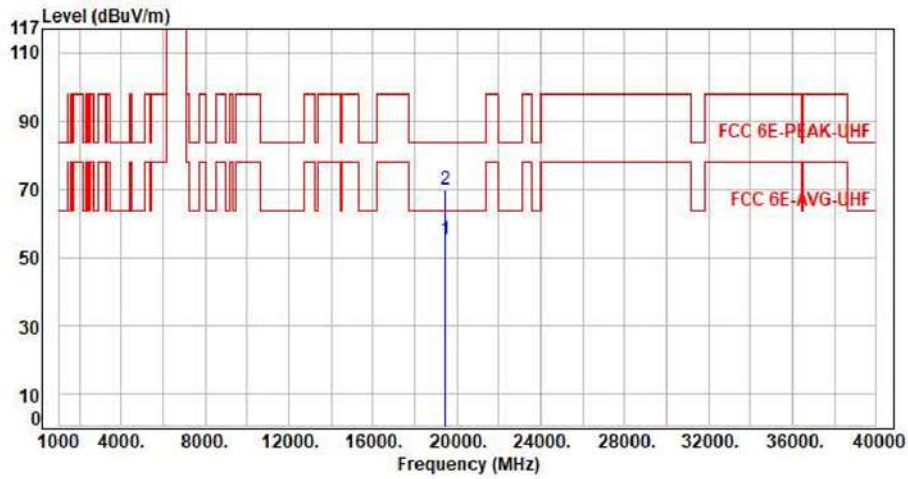


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	43.52	55.27	63.54	-8.27	Average	150	360	P
2	19425.00	11.75	58.00	69.75	83.54	-13.79	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

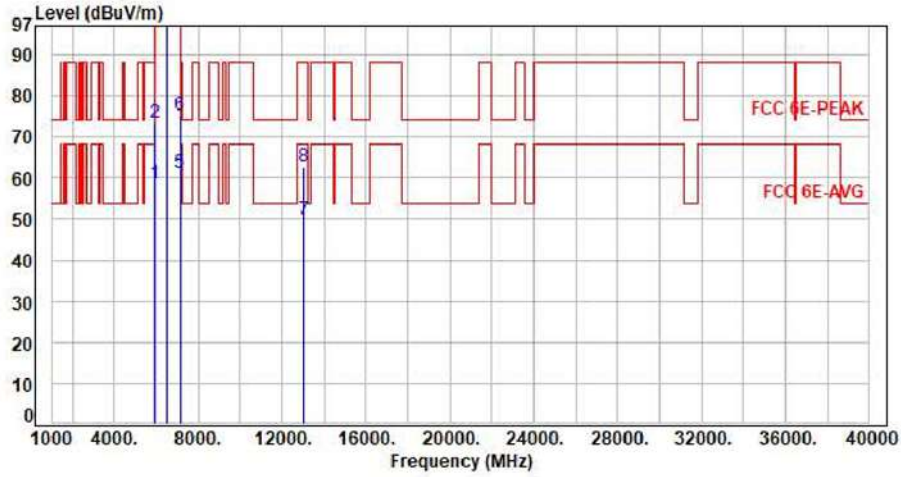


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.01	58.74	68.20	-9.46	Average	141	8	P
2	5925.00	7.73	65.57	73.30	88.20	-14.90	Peak	141	8	P
3	6515.00	8.45	99.38	107.83	200.00	-92.17	Average	141	8	P
4	6515.00	8.45	112.40	120.85	200.00	-79.15	Peak	141	8	P
5	7125.00	11.08	50.25	61.33	68.20	-6.87	Average	141	8	P
6	7125.00	11.08	64.19	75.27	88.20	-12.93	Peak	141	8	P
7	13030.00	19.06	30.74	49.80	68.20	-18.40	Average	100	125	P
8	13030.00	19.06	43.54	62.60	88.20	-25.60	Peak	100	125	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

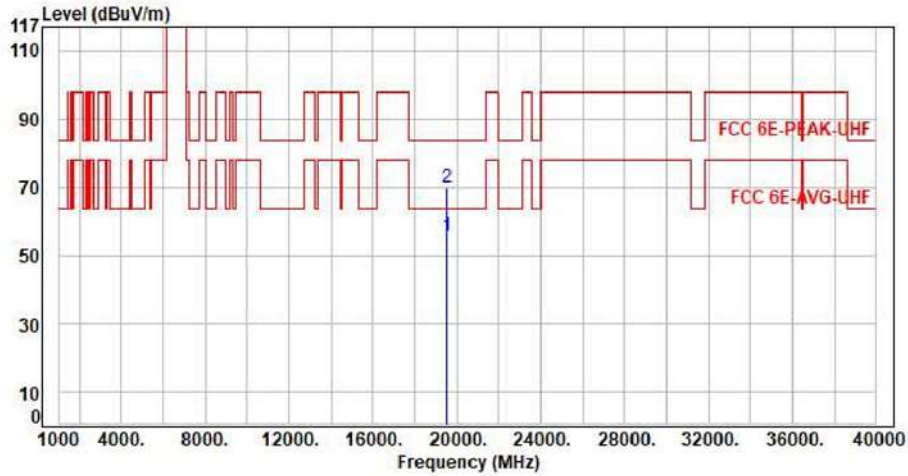


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	43.54	55.73	63.54	-7.81	Average	150	360	P
2	19545.00	12.19	57.48	69.67	83.54	-13.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

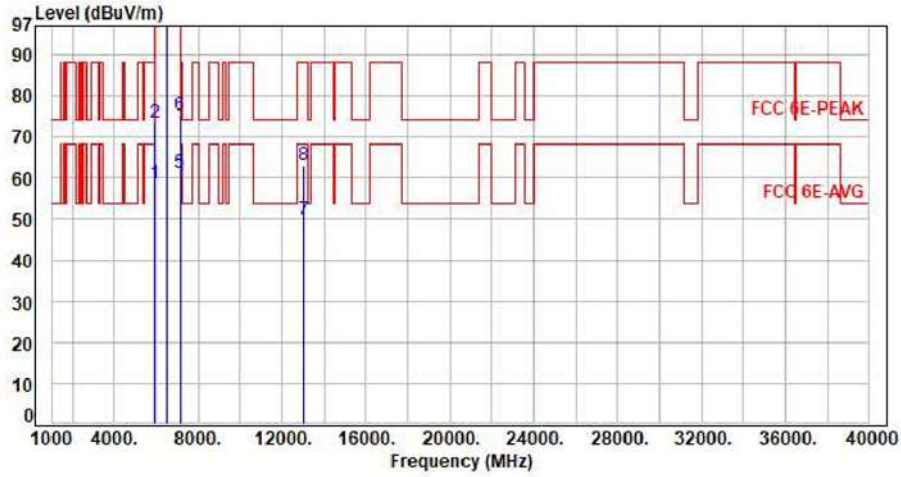


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.01	58.74	68.20	-9.46	Average	241	79	P
2	5925.00	7.73	65.67	73.40	88.20	-14.80	Peak	241	79	P
3	6515.00	8.45	101.84	110.29	200.00	-89.71	Average	241	79	P
4	6515.00	8.45	115.92	124.37	200.00	-75.63	Peak	241	79	P
5	7125.00	11.08	50.23	61.31	68.20	-6.89	Average	241	79	P
6	7125.00	11.08	64.15	75.23	88.20	-12.97	Peak	241	79	P
7	13030.00	19.06	30.74	49.80	68.20	-18.40	Average	100	216	P
8	13030.00	19.06	43.86	62.92	88.20	-25.28	Peak	100	216	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

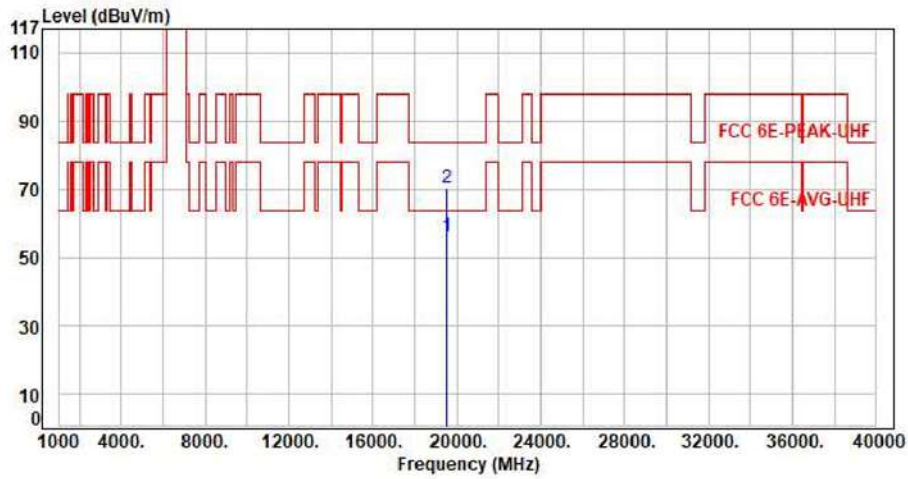


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	43.94	56.13	63.54	-7.41	Average	150	360	P
2	19545.00	12.19	57.98	70.17	83.54	-13.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

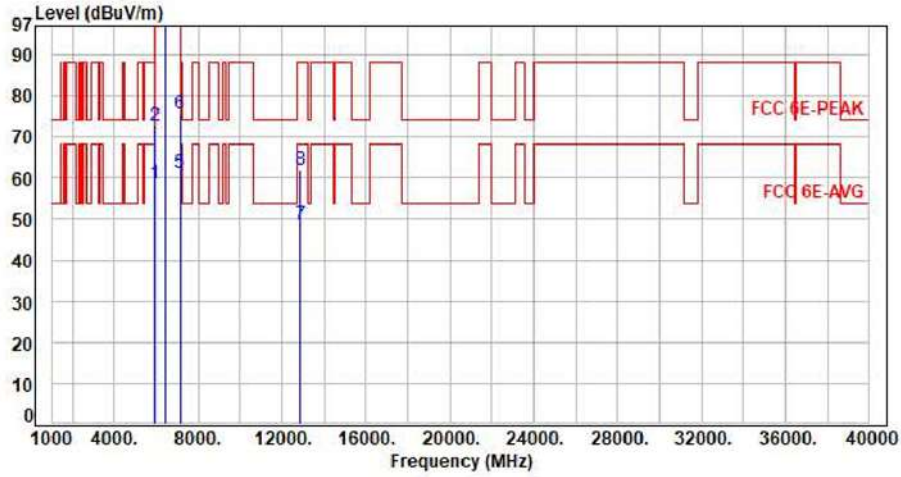


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.04	58.77	68.20	-9.43	Average	106	9	P
2	5925.00	7.73	64.90	72.63	88.20	-15.57	Peak	106	9	P
3	6445.00	8.33	96.95	105.28	200.00	-94.72	Average	106	9	P
4	6445.00	8.33	110.93	119.26	200.00	-80.74	Peak	106	9	P
5	7125.00	11.08	50.22	61.30	68.20	-6.90	Average	106	9	P
6	7125.00	11.08	64.46	75.54	88.20	-12.66	Peak	106	9	P
7	12890.00	18.43	30.38	48.81	68.20	-19.39	Average	100	124	P
8	12890.00	18.43	43.66	62.09	88.20	-26.11	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

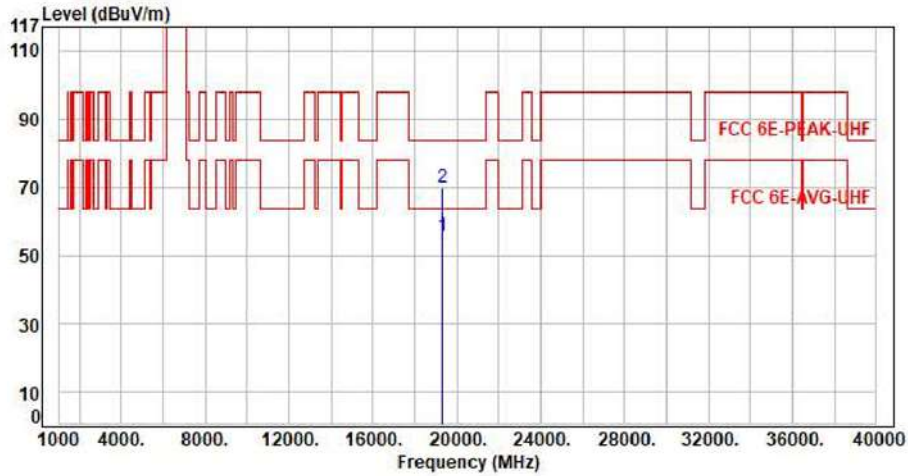


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	43.92	55.54	63.54	-8.00	Average	150	360	P
2	19335.00	11.62	58.31	69.93	83.54	-13.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

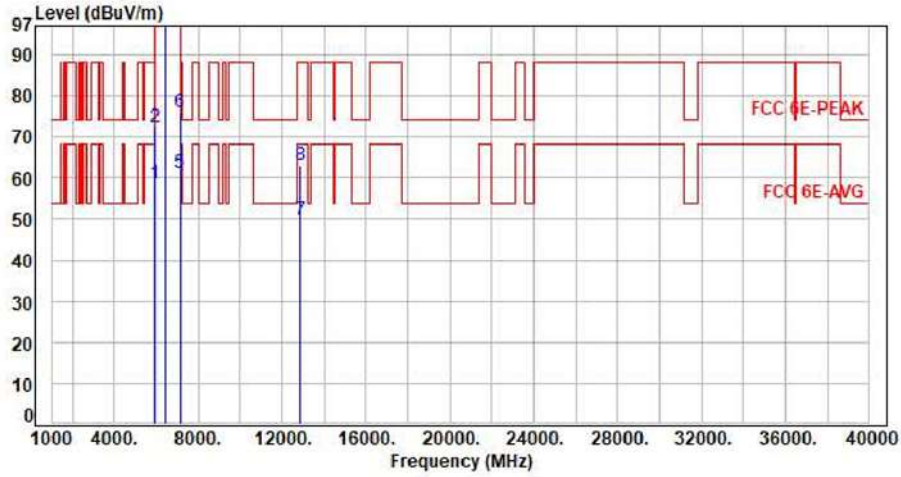


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.04	58.77	68.20	-9.43	Average	229	51	P
2	5925.00	7.73	64.68	72.41	88.20	-15.79	Peak	229	51	P
3	6445.00	8.33	100.13	108.46	200.00	-91.54	Average	229	51	P
4	6445.00	8.33	112.17	120.50	200.00	-79.50	Peak	229	51	P
5	7125.00	11.08	50.10	61.18	68.20	-7.02	Average	229	51	P
6	7125.00	11.08	64.88	75.96	88.20	-12.24	Peak	229	51	P
7	12890.00	18.43	31.42	49.85	68.20	-18.35	Average	100	221	P
8	12890.00	18.43	44.59	63.02	88.20	-25.18	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

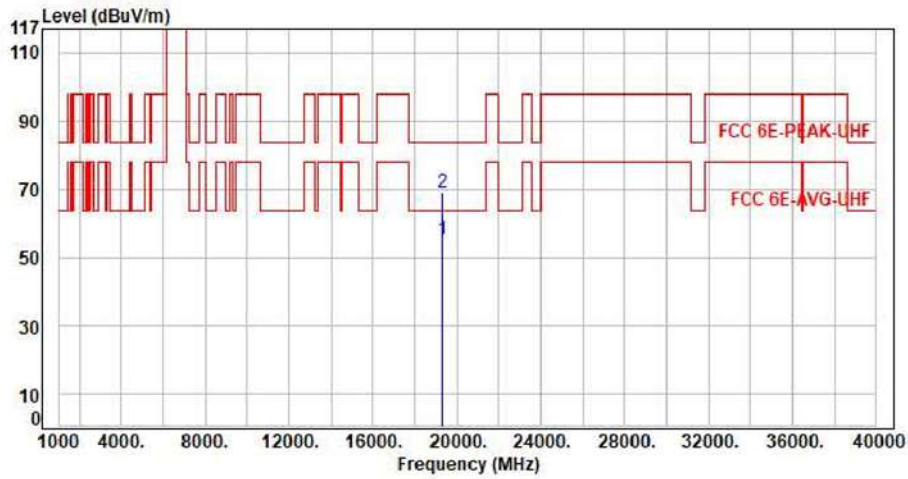


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	43.58	55.20	63.54	-8.34	Average	150	360	P
2	19335.00	11.62	57.46	69.08	83.54	-14.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

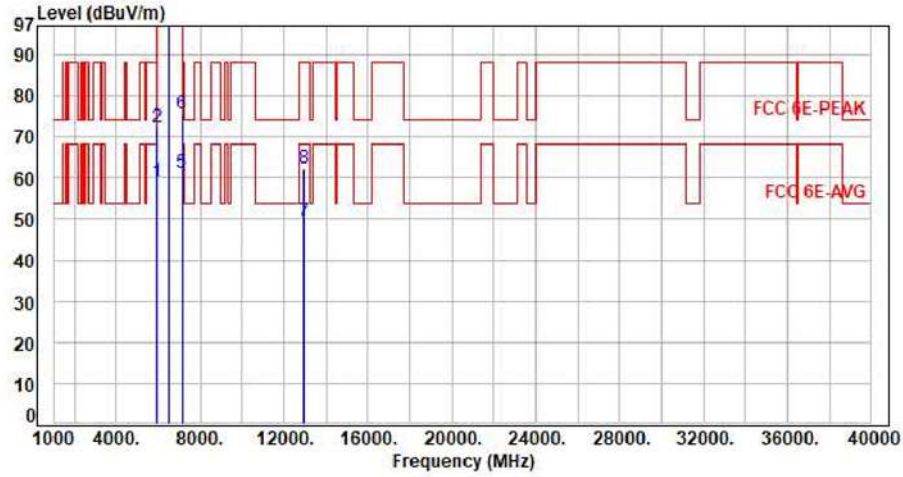


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.11	58.84	68.20	-9.36	Average	119	8	P
2	5925.00	7.73	64.59	72.32	88.20	-15.88	Peak	119	8	P
3	6485.00	8.35	96.74	105.09	200.00	-94.91	Average	119	8	P
4	6485.00	8.35	110.16	118.51	200.00	-81.49	Peak	119	8	P
5	7125.00	11.08	50.23	61.31	68.20	-6.89	Average	119	8	P
6	7125.00	11.08	64.55	75.63	88.20	-12.57	Peak	119	8	P
7	12970.00	18.83	30.55	49.38	68.20	-18.82	Average	100	127	P
8	12970.00	18.83	43.38	62.21	88.20	-25.99	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

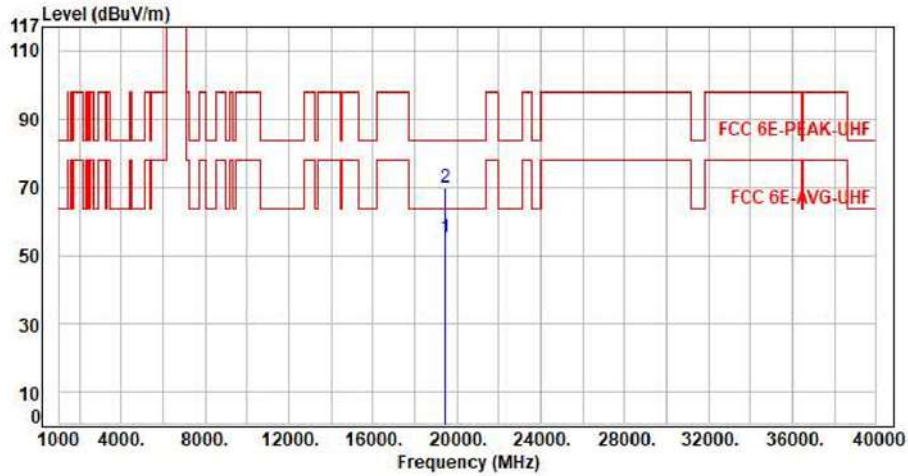


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	43.61	55.18	63.54	-8.36	Average	150	360	P
2	19455.00	11.57	58.40	69.97	83.54	-13.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

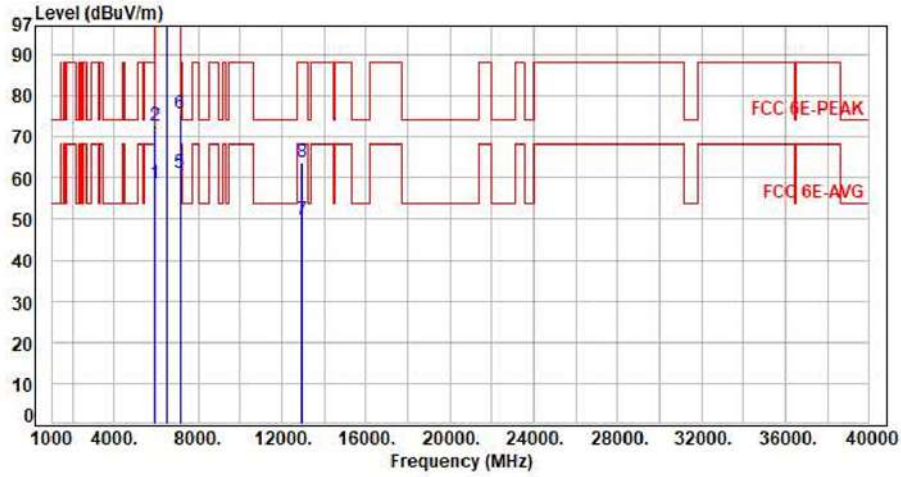


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.01	58.74	68.20	-9.46	Average	253	80	P
2	5925.00	7.73	64.85	72.58	88.20	-15.62	Peak	253	80	P
3	6485.00	8.35	99.15	107.50	200.00	-92.50	Average	253	80	P
4	6485.00	8.35	111.63	119.98	200.00	-80.02	Peak	253	80	P
5	7125.00	11.08	50.24	61.32	68.20	-6.88	Average	253	80	P
6	7125.00	11.08	64.38	75.46	88.20	-12.74	Peak	253	80	P
7	12970.00	18.83	30.85	49.68	68.20	-18.52	Average	100	224	P
8	12970.00	18.83	44.82	63.65	88.20	-24.55	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

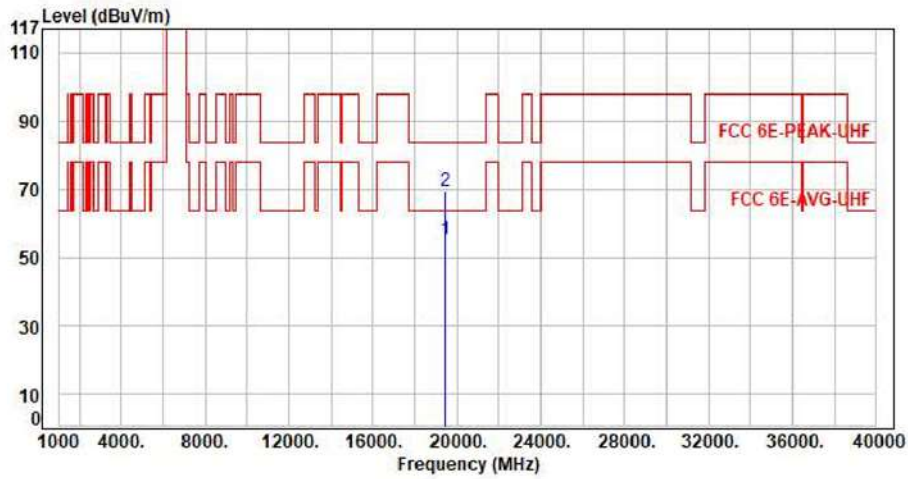


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	43.78	55.35	63.54	-8.19	Average	150	360	P
2	19455.00	11.57	57.83	69.40	83.54	-14.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

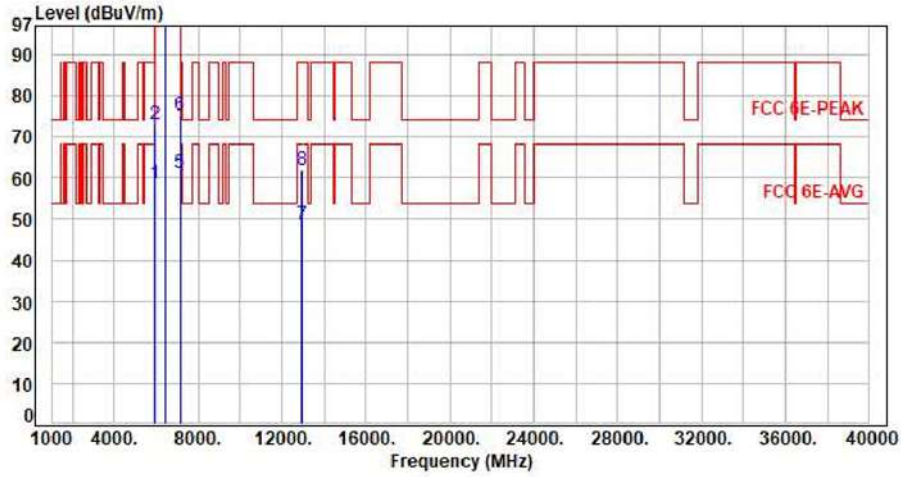


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.02	58.75	68.20	-9.45	Average	100	6	P
2	5925.00	7.73	65.39	73.12	88.20	-15.08	Peak	100	6	P
3	6465.00	8.33	93.73	102.06	200.00	-97.94	Average	100	6	P
4	6465.00	8.33	106.66	114.99	200.00	-85.01	Peak	100	6	P
5	7125.00	11.08	50.23	61.31	68.20	-6.89	Average	100	6	P
6	7125.00	11.08	64.21	75.29	88.20	-12.91	Peak	100	6	P
7	12930.00	18.63	30.07	48.70	68.20	-19.50	Average	100	128	P
8	12930.00	18.63	43.19	61.82	88.20	-26.38	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

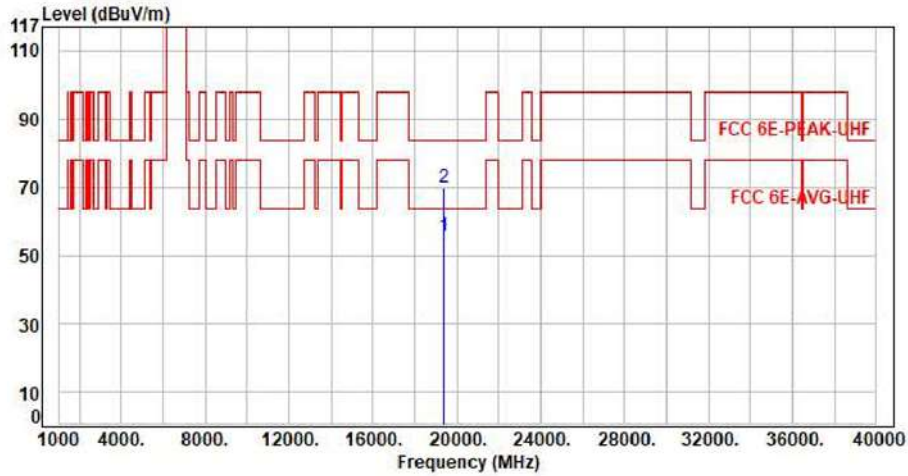


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	43.57	55.48	63.54	-8.06	Average	150	360	P
2	19395.00	11.91	57.83	69.74	83.54	-13.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

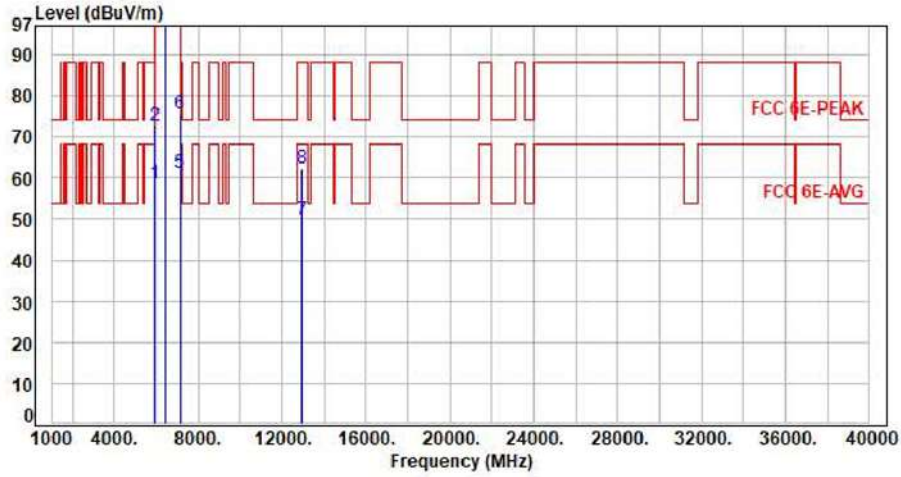


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.04	58.77	68.20	-9.43	Average	220	50	P
2	5925.00	7.73	64.79	72.52	88.20	-15.68	Peak	220	50	P
3	6465.00	8.33	96.91	105.24	200.00	-94.76	Average	220	50	P
4	6465.00	8.33	109.48	117.81	200.00	-82.19	Peak	220	50	P
5	7125.00	11.08	50.22	61.30	68.20	-6.90	Average	220	50	P
6	7125.00	11.08	64.39	75.47	88.20	-12.73	Peak	220	50	P
7	12930.00	18.63	31.21	49.84	68.20	-18.36	Average	100	225	P
8	12930.00	18.63	43.78	62.41	88.20	-25.79	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

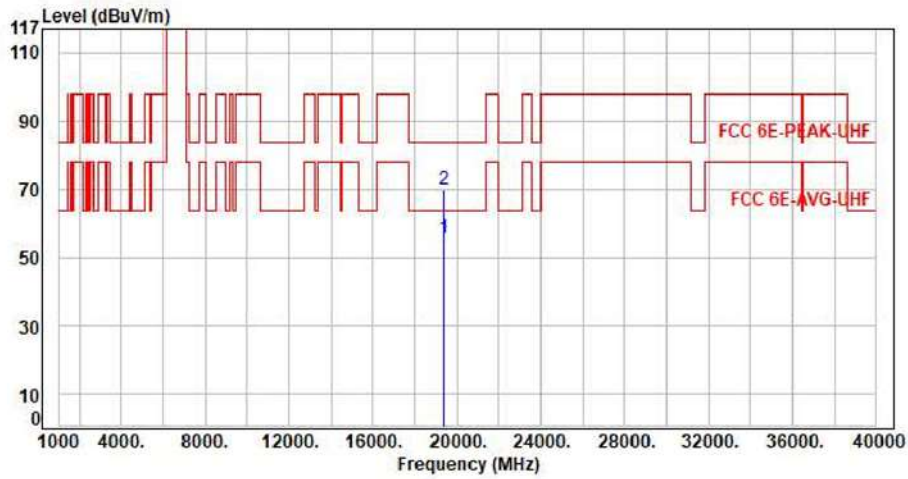


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	43.68	55.59	63.54	-7.95	Average	150	360	P
2	19395.00	11.91	58.05	69.96	83.54	-13.58	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

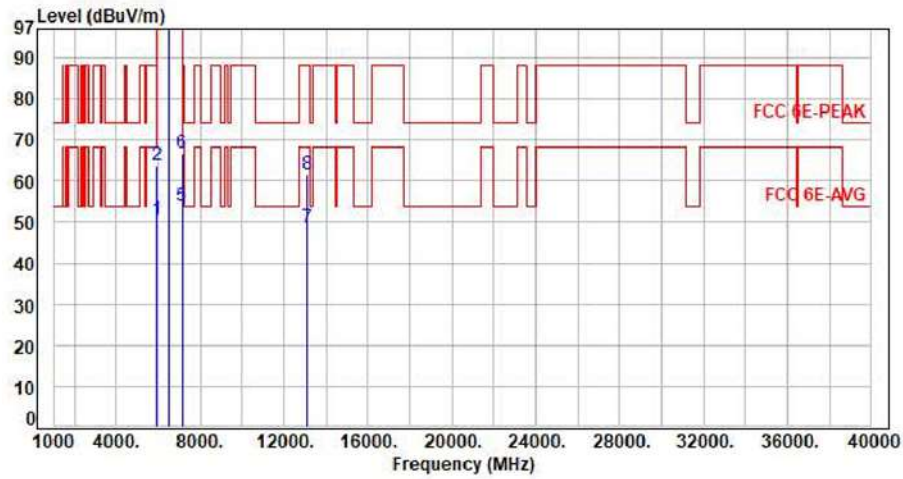


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.82	50.55	68.20	-17.65	Average	159	8	P
2	5925.00	7.73	56.20	63.93	88.20	-24.27	Peak	159	8	P
3	6535.00	8.57	97.00	105.57	200.00	-94.43	Average	159	8	P
4	6535.00	8.57	106.50	115.07	200.00	-84.93	Peak	159	8	P
5	7125.00	11.08	42.81	53.89	68.20	-14.31	Average	159	8	P
6	7125.00	11.08	55.65	66.73	88.20	-21.47	Peak	159	8	P
7	13070.00	19.27	29.43	48.70	68.20	-19.50	Average	100	192	P
8	13070.00	19.27	42.31	61.58	88.20	-26.62	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

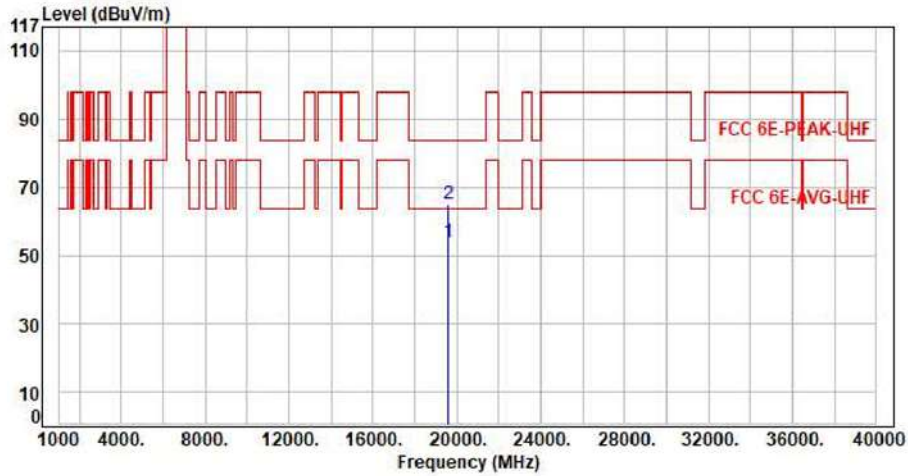


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	41.97	53.75	63.54	-9.79	Average	150	360	P
2	19605.00	11.78	53.25	65.03	83.54	-18.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

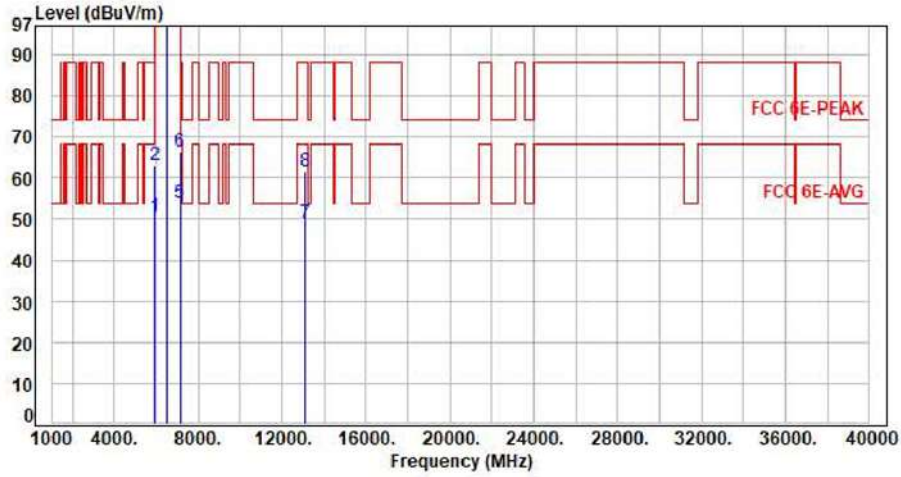


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.82	50.55	68.20	-17.65	Average	249	71	P
2	5925.00	7.73	55.19	62.92	88.20	-25.28	Peak	249	71	P
3	6535.00	8.57	100.95	109.52	200.00	-90.48	Average	249	71	P
4	6535.00	8.57	110.57	119.14	200.00	-80.86	Peak	249	71	P
5	7125.00	11.08	42.68	53.76	68.20	-14.44	Average	249	71	P
6	7125.00	11.08	55.33	66.41	88.20	-21.79	Peak	249	71	P
7	13070.00	19.27	29.65	48.92	68.20	-19.28	Average	100	221	P
8	13070.00	19.27	42.38	61.65	88.20	-26.55	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

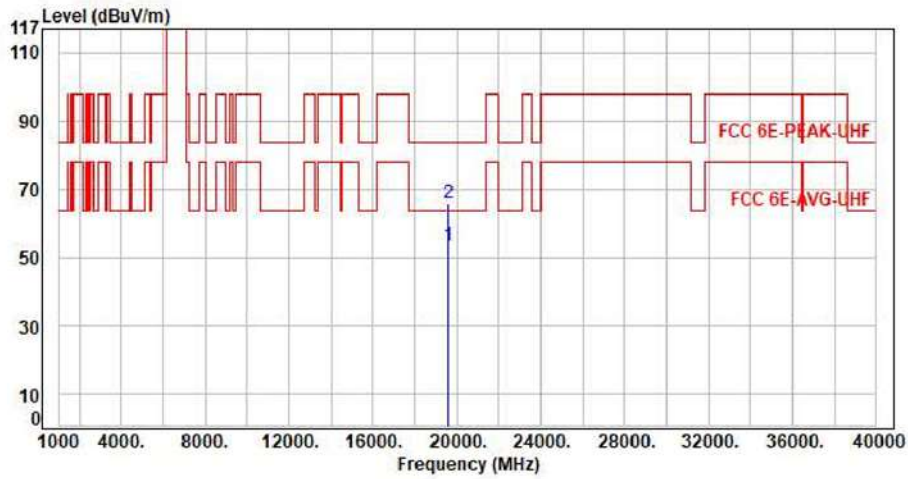


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	41.79	53.57	63.54	-9.97	Average	150	360	P
2	19605.00	11.78	54.22	66.00	83.54	-17.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

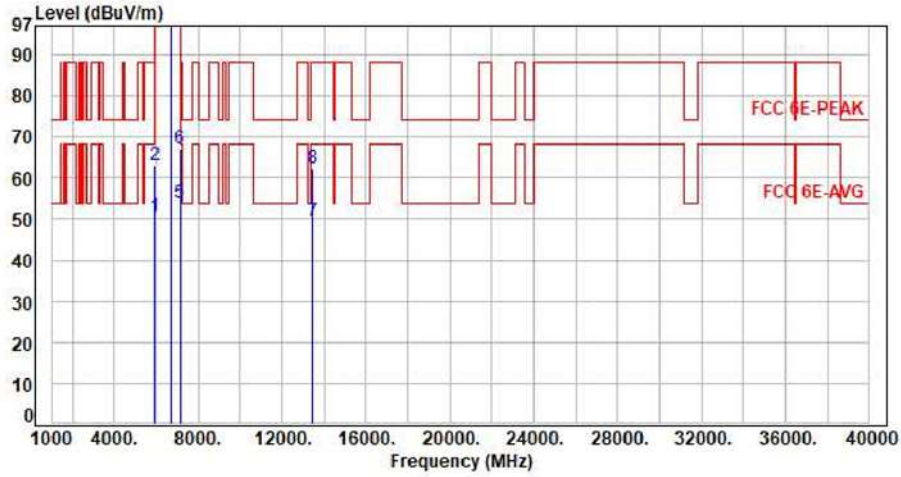


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.81	50.54	68.20	-17.66	Average	133	1	P
2	5925.00	7.73	55.48	63.21	88.20	-24.99	Peak	133	1	P
3	6715.00	9.20	95.35	104.55	200.00	-95.45	Average	133	1	P
4	6715.00	9.20	104.85	114.05	200.00	-85.95	Peak	133	1	P
5	7125.00	11.08	42.74	53.82	68.20	-14.38	Average	133	1	P
6	7125.00	11.08	55.96	67.04	88.20	-21.16	Peak	133	1	P
7	13430.00	20.91	28.48	49.39	68.20	-18.81	Average	100	225	P
8	13430.00	20.91	41.52	62.43	88.20	-25.77	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

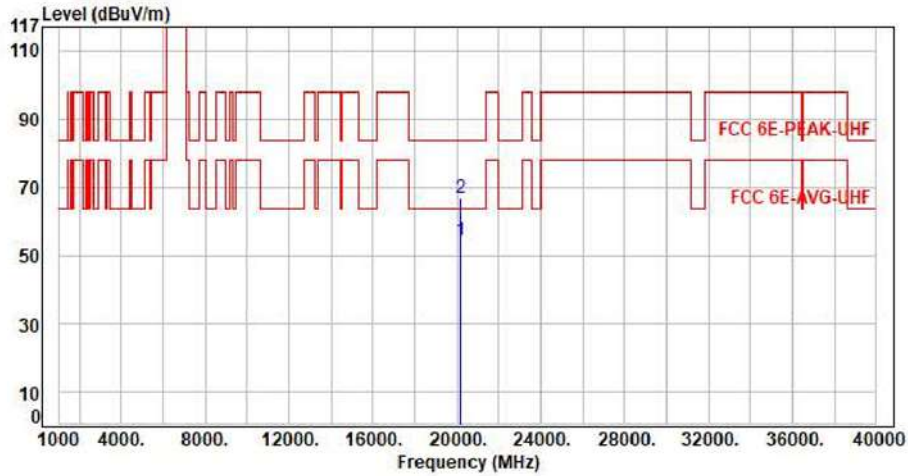


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	42.96	54.39	63.54	-9.15	Average	150	360	P
2	20145.00	11.43	55.45	66.88	83.54	-16.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

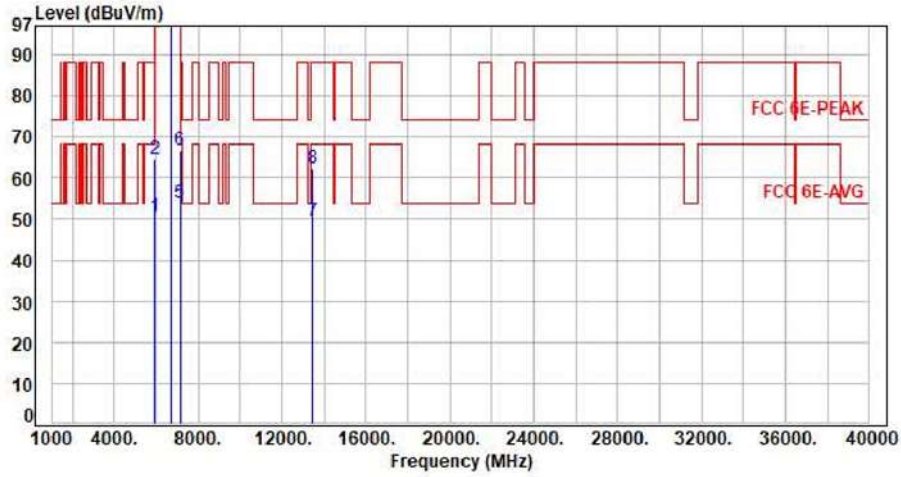


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.76	50.49	68.20	-17.71	Average	100	68	P
2	5925.00	7.73	56.92	64.65	88.20	-23.55	Peak	100	68	P
3	6715.00	9.20	99.60	108.80	200.00	-91.20	Average	100	68	P
4	6715.00	9.20	109.34	118.54	200.00	-81.46	Peak	100	68	P
5	7125.00	11.08	42.68	53.76	68.20	-14.44	Average	100	68	P
6	7125.00	11.08	55.53	66.61	88.20	-21.59	Peak	100	68	P
7	13430.00	20.91	28.62	49.53	68.20	-18.67	Average	100	199	P
8	13430.00	20.91	41.31	62.22	88.20	-25.98	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

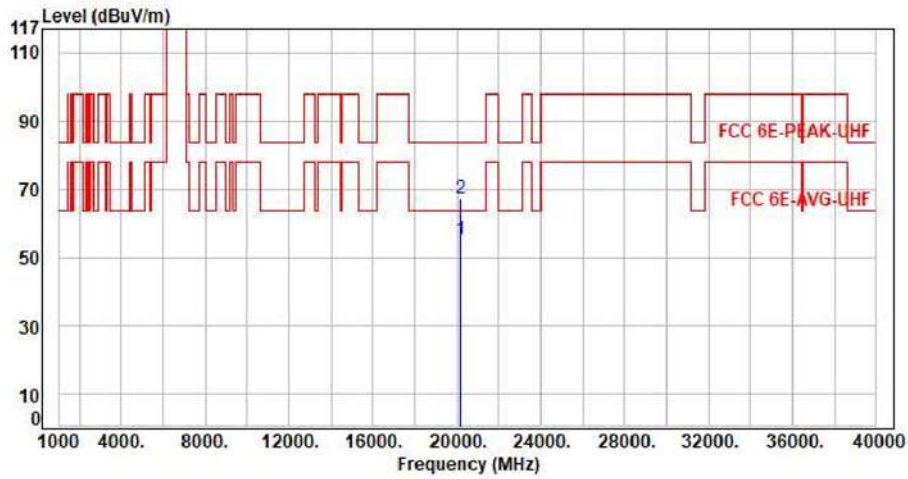


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	43.52	54.95	63.54	-8.59	Average	150	360	P
2	20145.00	11.43	55.82	67.25	83.54	-16.29	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

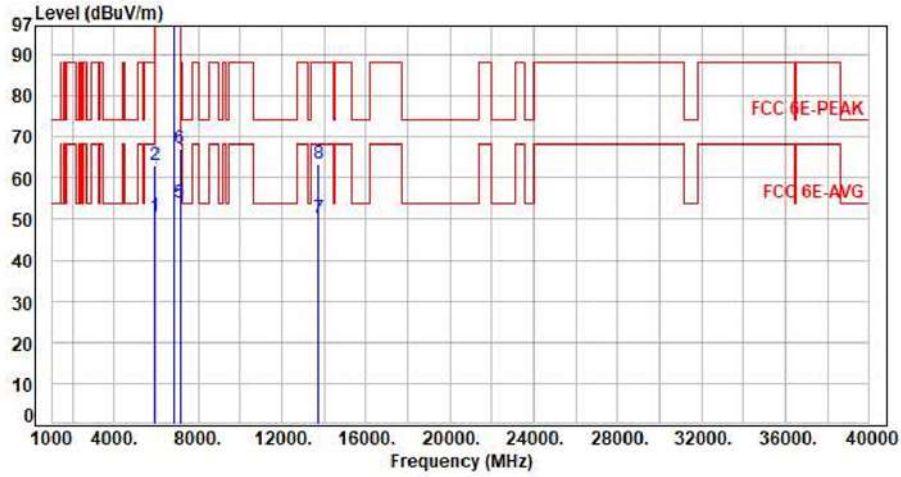


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.73	50.46	68.20	-17.74	Average	362	356	P
2	5925.00	7.73	55.47	63.20	88.20	-25.00	Peak	362	356	P
3	6855.00	9.48	94.36	103.84	200.00	-96.16	Average	362	356	P
4	6855.00	9.48	103.86	113.34	200.00	-86.66	Peak	362	356	P
5	7125.00	11.08	42.78	53.86	68.20	-14.34	Average	362	356	P
6	7125.00	11.08	56.22	67.30	88.20	-20.90	Peak	362	356	P
7	13710.00	21.70	28.58	50.28	68.20	-17.92	Average	100	221	P
8	13710.00	21.70	41.75	63.45	88.20	-24.75	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

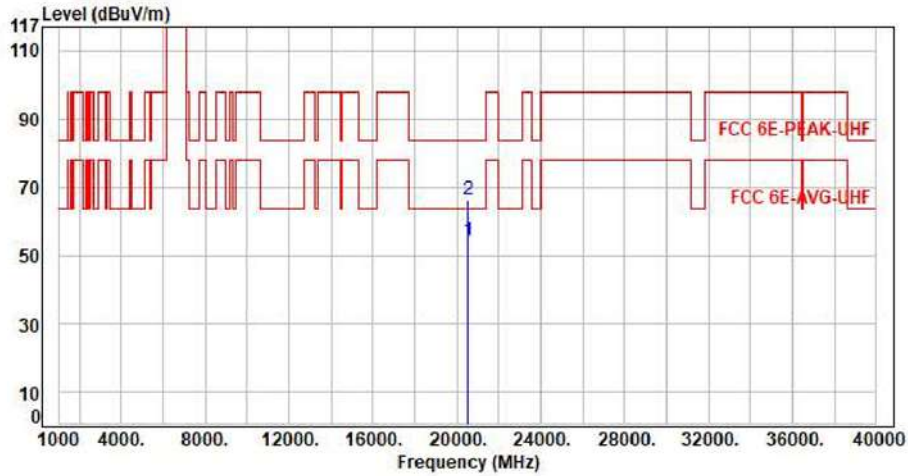


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	43.06	54.44	63.54	-9.10	Average	150	360	P
2	20565.00	11.38	55.07	66.45	83.54	-17.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

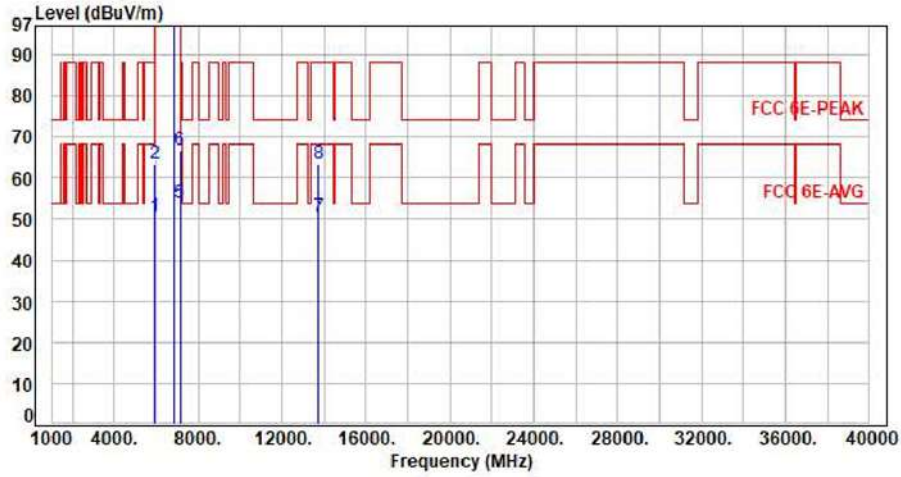


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.89	50.62	68.20	-17.58	Average	261	71	P
2	5925.00	7.73	55.84	63.57	88.20	-24.63	Peak	261	71	P
3	6855.00	9.48	98.19	107.67	200.00	-92.33	Average	261	71	P
4	6855.00	9.48	107.70	117.18	200.00	-82.82	Peak	261	71	P
5	7125.00	11.08	42.75	53.83	68.20	-14.37	Average	261	71	P
6	7125.00	11.08	55.70	66.78	88.20	-21.42	Peak	261	71	P
7	13710.00	21.70	28.84	50.54	68.20	-17.66	Average	100	114	P
8	13710.00	21.70	41.74	63.44	88.20	-24.76	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

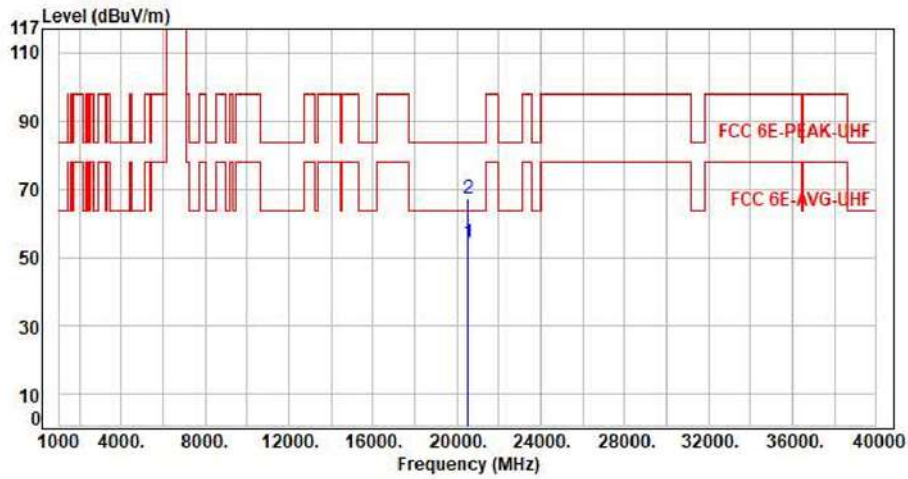


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	42.95	54.33	63.54	-9.21	Average	150	360	P
2	20565.00	11.38	55.67	67.05	83.54	-16.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

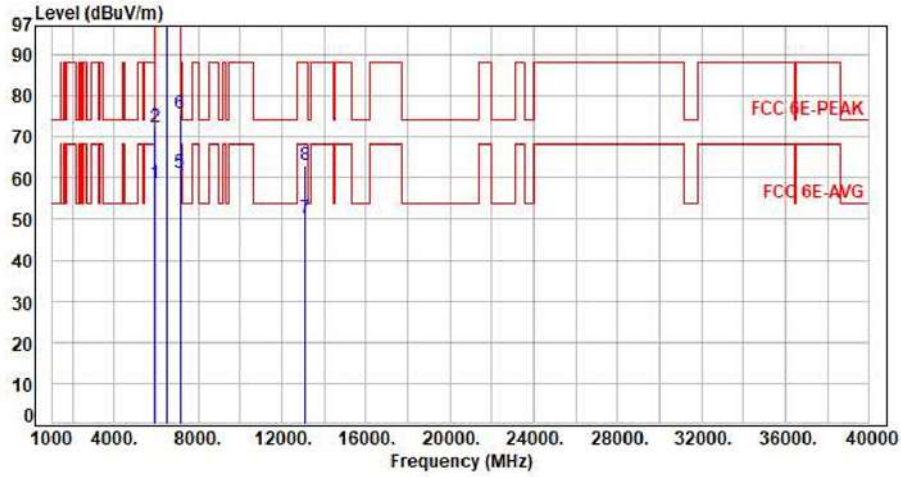


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.02	58.75	68.20	-9.45	Average	138	8	P
2	5925.00	7.73	64.73	72.46	88.20	-15.74	Peak	138	8	P
3	6535.00	8.57	99.42	107.99	200.00	-92.01	Average	138	8	P
4	6535.00	8.57	113.12	121.69	200.00	-78.31	Peak	138	8	P
5	7125.00	11.08	50.23	61.31	68.20	-6.89	Average	138	8	P
6	7125.00	11.08	64.50	75.58	88.20	-12.62	Peak	138	8	P
7	13070.00	19.27	30.94	50.21	68.20	-17.99	Average	100	125	P
8	13070.00	19.27	43.67	62.94	88.20	-25.26	Peak	100	125	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

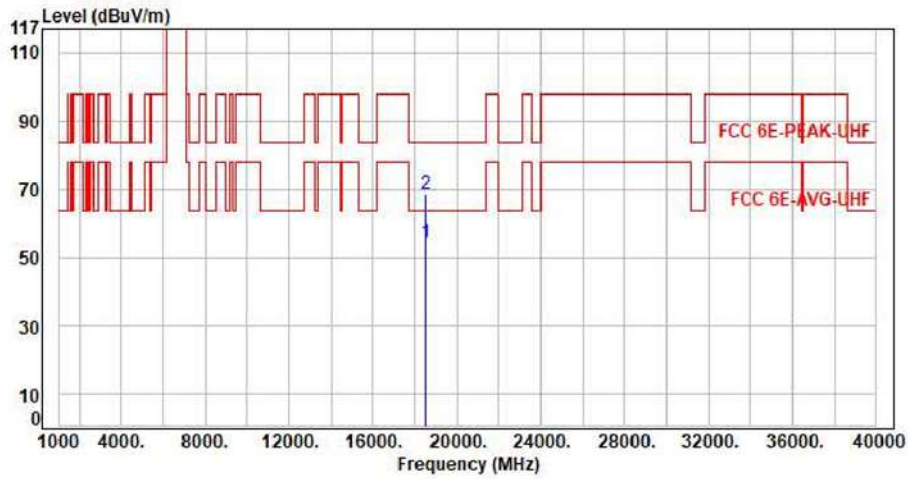


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	43.82	54.37	63.54	-9.17	Average	150	360	P
2	18525.00	10.55	57.89	68.44	83.54	-15.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

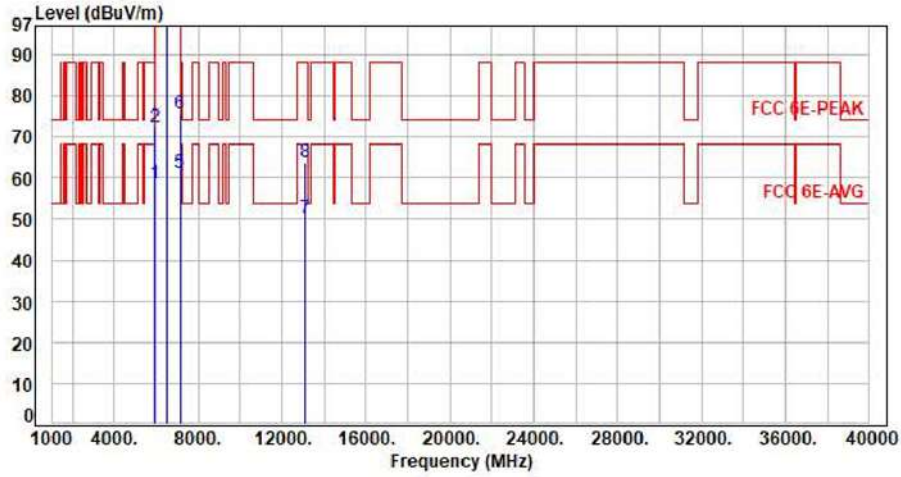


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.01	58.74	68.20	-9.46	Average	242	76	P
2	5925.00	7.73	64.48	72.21	88.20	-15.99	Peak	242	76	P
3	6535.00	8.57	102.61	111.18	200.00	-88.82	Average	242	76	P
4	6535.00	8.57	116.42	124.99	200.00	-75.01	Peak	242	76	P
5	7125.00	11.08	50.25	61.33	68.20	-6.87	Average	242	76	P
6	7125.00	11.08	64.42	75.50	88.20	-12.70	Peak	242	76	P
7	13070.00	19.27	30.81	50.08	68.20	-18.12	Average	100	223	P
8	13070.00	19.27	44.56	63.83	88.20	-24.37	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

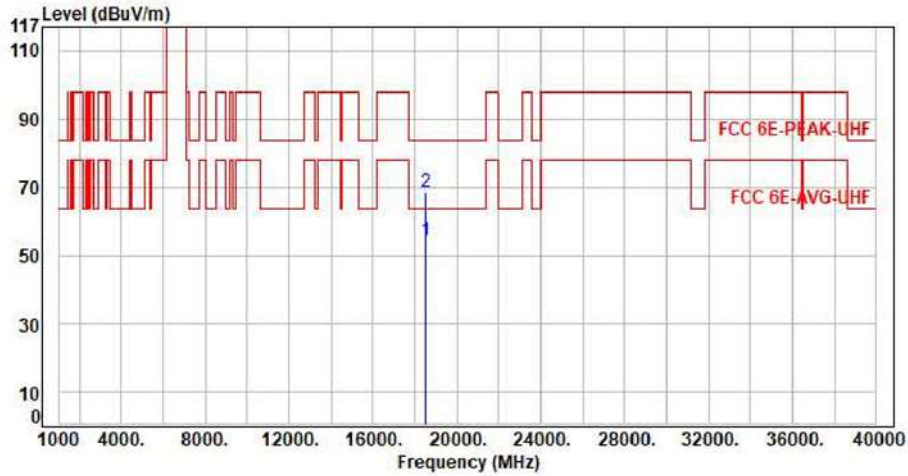


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	43.88	54.43	63.54	-9.11	Average	150	360	P
2	18525.00	10.55	58.16	68.71	83.54	-14.83	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

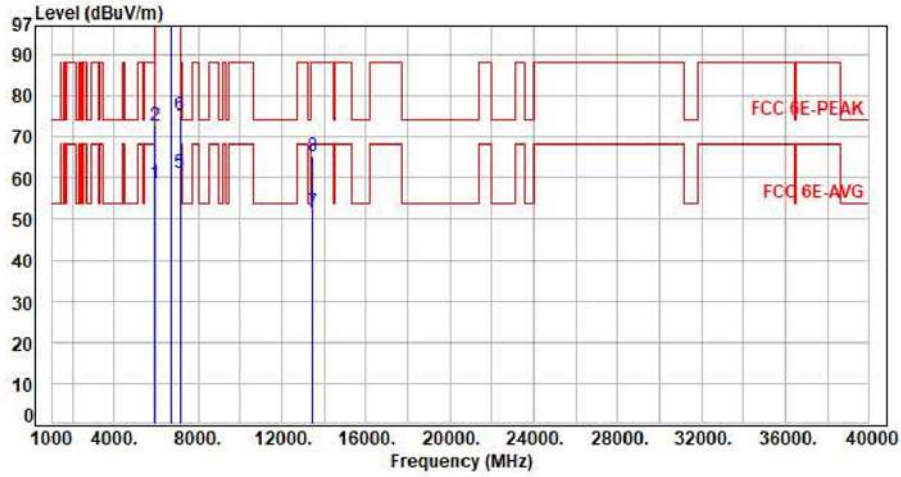


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.02	58.75	68.20	-9.45	Average	100	4	P
2	5925.00	7.73	65.07	72.80	88.20	-15.40	Peak	100	4	P
3	6715.00	9.20	99.04	108.24	200.00	-91.76	Average	100	4	P
4	6715.00	9.20	111.94	121.14	200.00	-78.86	Peak	100	4	P
5	7125.00	11.08	50.22	61.30	68.20	-6.90	Average	100	4	P
6	7125.00	11.08	64.21	75.29	88.20	-12.91	Peak	100	4	P
7	13430.00	20.91	30.75	51.66	68.20	-16.54	Average	100	124	P
8	13430.00	20.91	44.49	65.40	88.20	-22.80	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

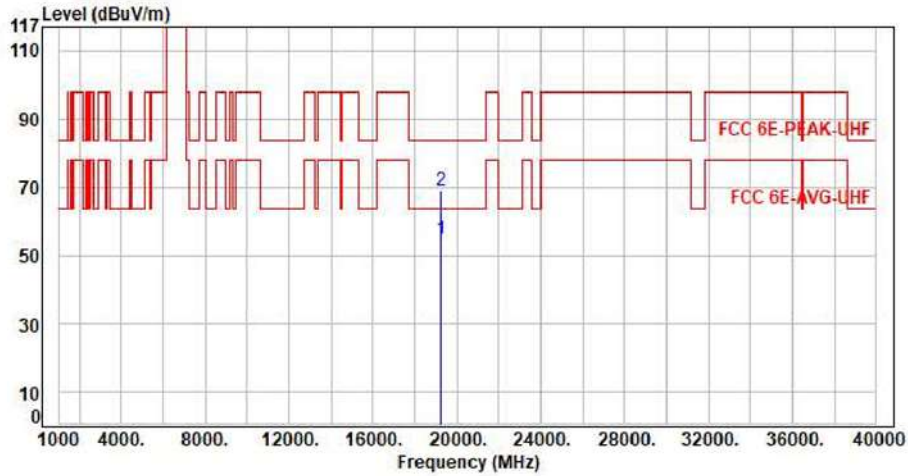


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	43.56	54.93	63.54	-8.61	Average	150	360	P
2	19245.00	11.37	57.71	69.08	83.54	-14.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

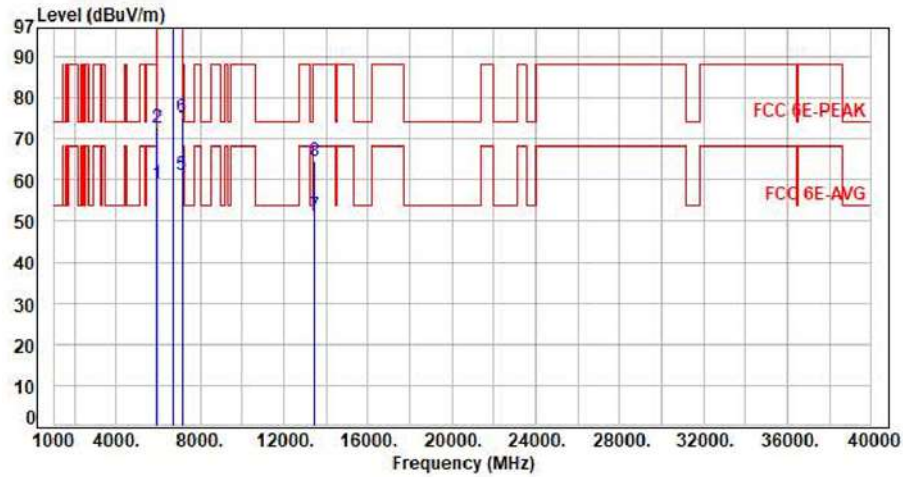


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.10	58.83	68.20	-9.37	Average	100	70	P
2	5925.00	7.73	64.75	72.48	88.20	-15.72	Peak	100	70	P
3	6715.00	9.20	101.01	110.21	200.00	-89.79	Average	100	70	P
4	6715.00	9.20	115.05	124.25	200.00	-75.75	Peak	100	70	P
5	7125.00	11.08	50.22	61.30	68.20	-6.90	Average	100	70	P
6	7125.00	11.08	64.12	75.20	88.20	-13.00	Peak	100	70	P
7	13430.00	20.91	30.29	51.20	68.20	-17.00	Average	100	221	P
8	13430.00	20.91	43.58	64.49	88.20	-23.71	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

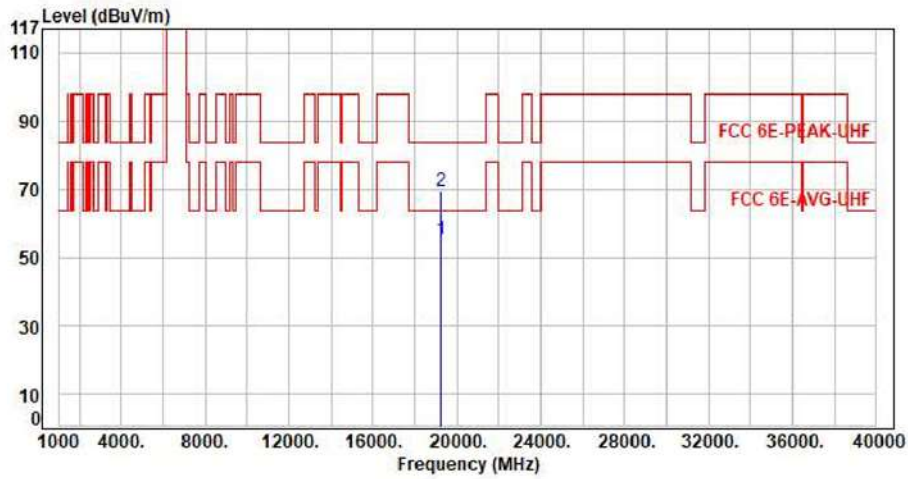


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	43.95	55.32	63.54	-8.22	Average	150	360	P
2	19245.00	11.37	57.83	69.20	83.54	-14.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

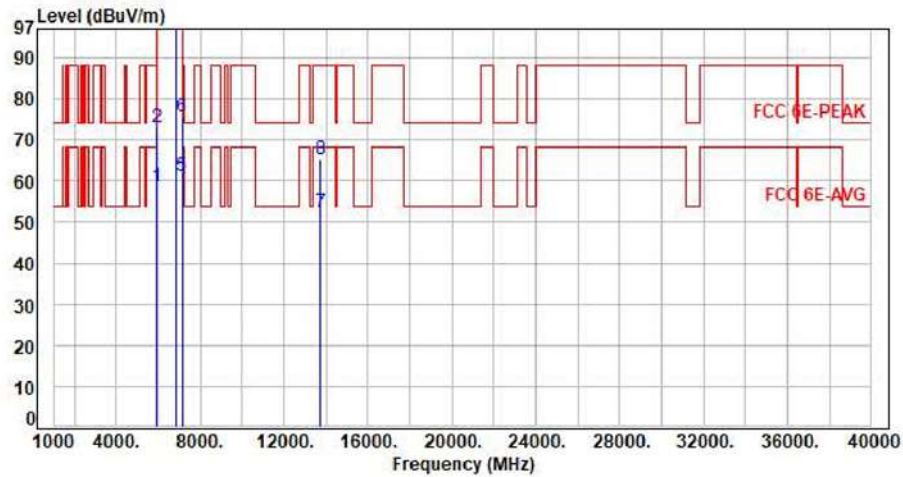


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.01	58.74	68.20	-9.46	Average	159	18	P
2	5925.00	7.73	65.22	72.95	88.20	-15.25	Peak	159	18	P
3	6855.00	9.48	94.79	104.27	200.00	-95.73	Average	159	18	P
4	6855.00	9.48	107.70	117.18	200.00	-82.82	Peak	159	18	P
5	7125.00	11.08	50.23	61.31	68.20	-6.89	Average	159	18	P
6	7125.00	11.08	64.42	75.50	88.20	-12.70	Peak	159	18	P
7	13710.00	21.70	30.69	52.39	68.20	-15.81	Average	100	124	P
8	13710.00	21.70	43.68	65.38	88.20	-22.82	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

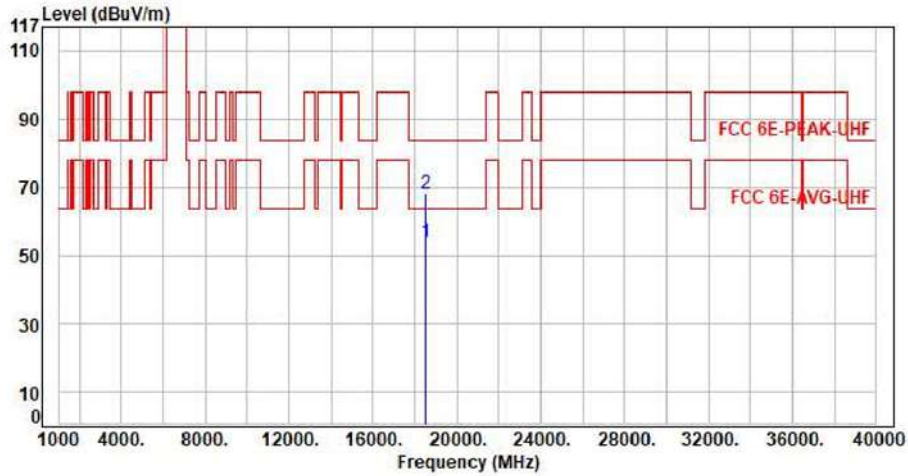


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	43.57	53.98	63.54	-9.56	Average	150	360	P
2	18495.00	10.41	57.63	68.04	83.54	-15.50	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

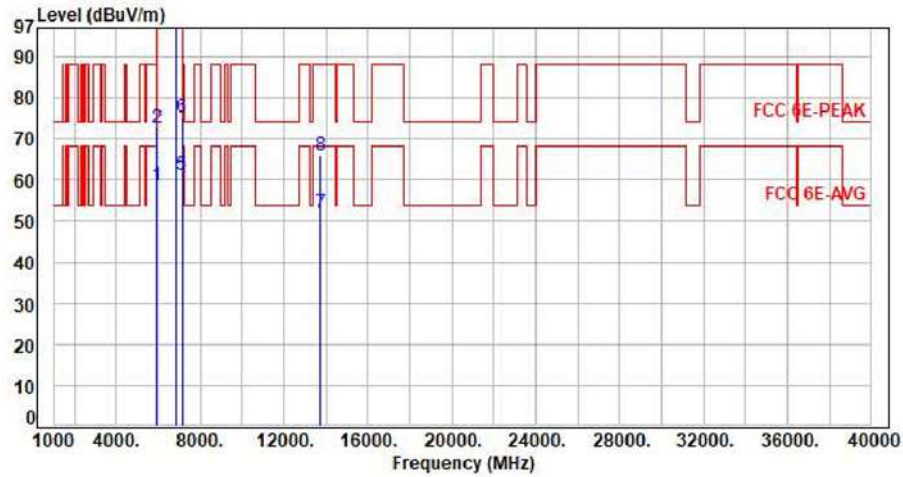


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.01	58.74	68.20	-9.46	Average	109	73	P
2	5925.00	7.73	64.88	72.61	88.20	-15.59	Peak	109	73	P
3	6855.00	9.48	99.99	109.47	200.00	-90.53	Average	109	73	P
4	6855.00	9.48	114.15	123.63	200.00	-76.37	Peak	109	73	P
5	7125.00	11.08	50.21	61.29	68.20	-6.91	Average	109	73	P
6	7125.00	11.08	64.15	75.23	88.20	-12.97	Peak	109	73	P
7	13710.00	21.70	30.47	52.17	68.20	-16.03	Average	100	219	P
8	13710.00	21.70	44.24	65.94	88.20	-22.26	Peak	100	219	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

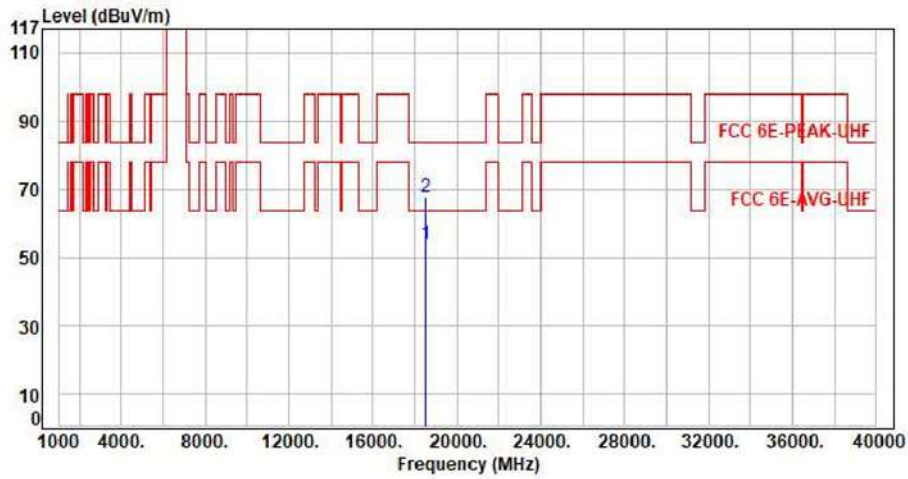


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	43.58	53.99	63.54	-9.55	Average	150	360	P
2	18495.00	10.41	57.42	67.83	83.54	-15.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

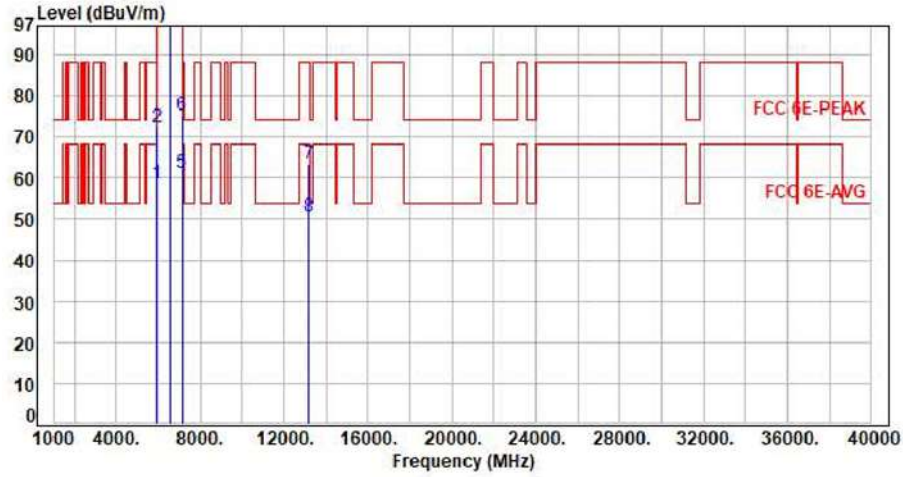


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	50.99	58.72	68.20	-9.48	Average	144	7	P
2	5925.00	7.73	64.56	72.29	88.20	-15.91	Peak	144	7	P
3	6565.00	8.72	97.69	106.41	200.00	-93.59	Average	144	7	P
4	6565.00	8.72	110.57	119.29	200.00	-80.71	Peak	144	7	P
5	7125.00	11.08	50.21	61.29	68.20	-6.91	Average	144	7	P
6	7125.00	11.08	63.99	75.07	88.20	-13.13	Peak	144	7	P
7	13130.00	19.51	43.76	63.27	68.20	-4.93	Average	100	124	P
8	13130.00	19.51	30.94	50.45	88.20	-37.75	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

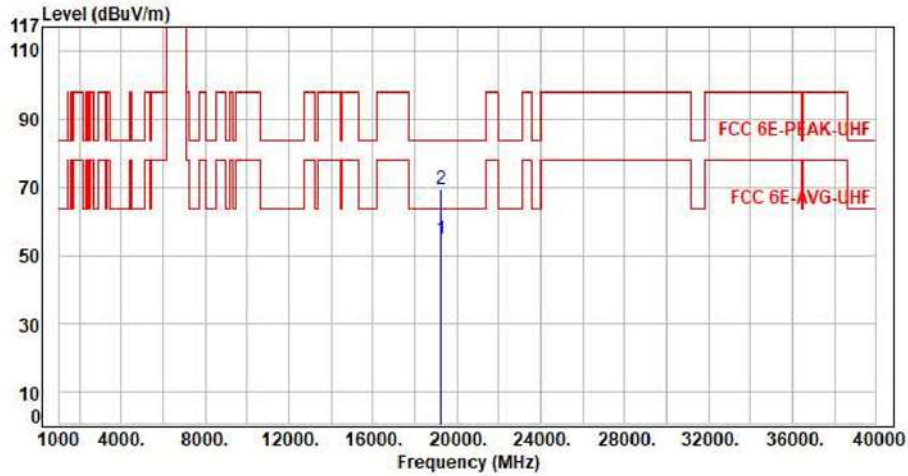


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	43.50	54.74	63.54	-8.80	Average	150	360	P
2	19215.00	11.24	58.37	69.61	83.54	-13.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

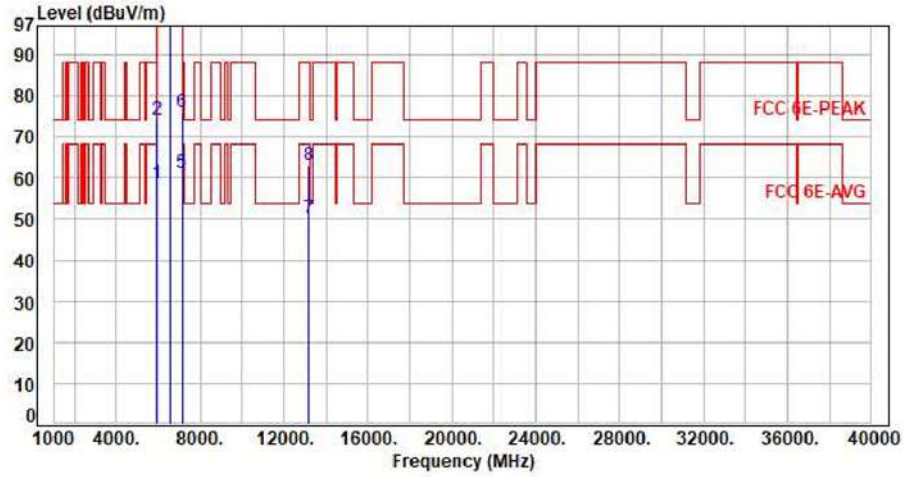


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	50.99	58.72	68.20	-9.48	Average	256	82	P
2	5925.00	7.73	66.25	73.98	88.20	-14.22	Peak	256	82	P
3	6565.00	8.72	100.11	108.83	200.00	-91.17	Average	256	82	P
4	6565.00	8.72	113.46	122.18	200.00	-77.82	Peak	256	82	P
5	7125.00	11.08	50.23	61.31	68.20	-6.89	Average	256	82	P
6	7125.00	11.08	65.07	76.15	88.20	-12.05	Peak	256	82	P
7	13130.00	19.51	30.62	50.13	68.20	-18.07	Average	100	220	P
8	13130.00	19.51	43.50	63.01	88.20	-25.19	Peak	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

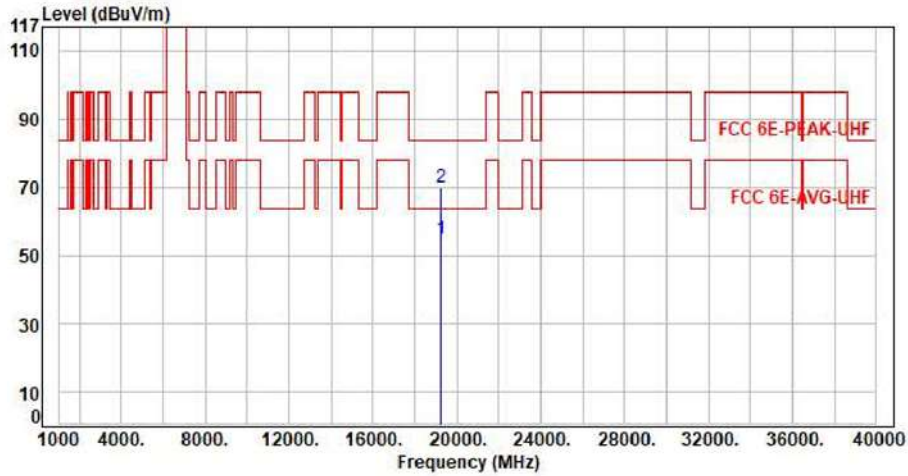


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	43.62	54.86	63.54	-8.68	Average	150	360	P
2	19215.00	11.24	58.46	69.70	83.54	-13.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

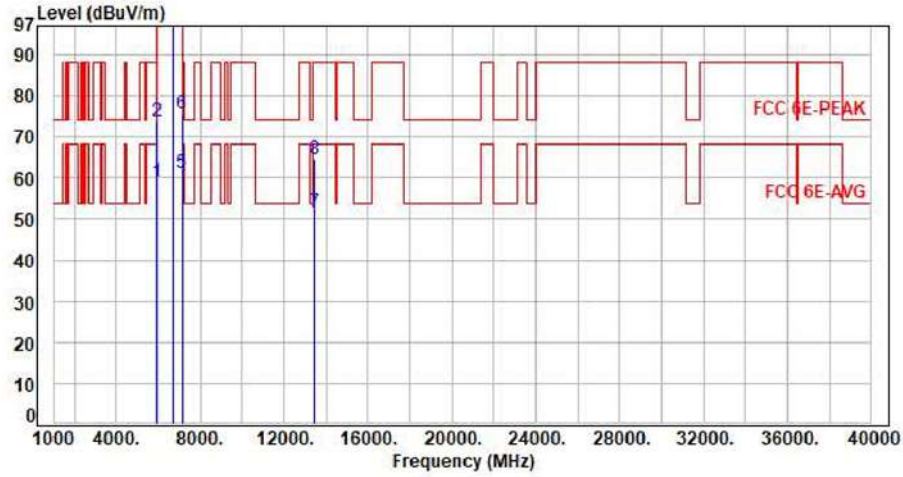


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.15	58.88	68.20	-9.32	Average	113	4	P
2	5925.00	7.73	65.94	73.67	88.20	-14.53	Peak	113	4	P
3	6725.00	9.22	96.57	105.79	200.00	-94.21	Average	113	4	P
4	6725.00	9.22	109.59	118.81	200.00	-81.19	Peak	113	4	P
5	7125.00	11.08	50.20	61.28	68.20	-6.92	Average	113	4	P
6	7125.00	11.08	64.37	75.45	88.20	-12.75	Peak	113	4	P
7	13450.00	20.96	30.84	51.80	68.20	-16.40	Average	100	121	P
8	13450.00	20.96	43.60	64.56	88.20	-23.64	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

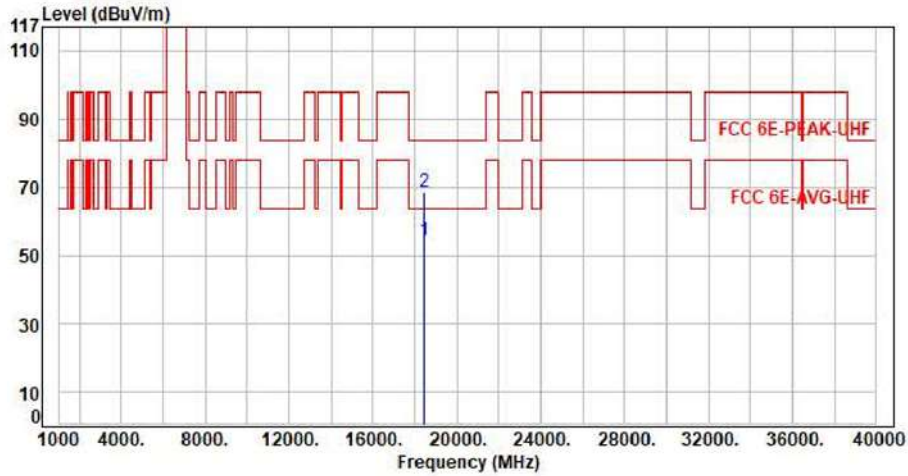


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	43.90	54.10	63.54	-9.44	Average	150	360	P
2	18435.00	10.20	58.44	68.64	83.54	-14.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

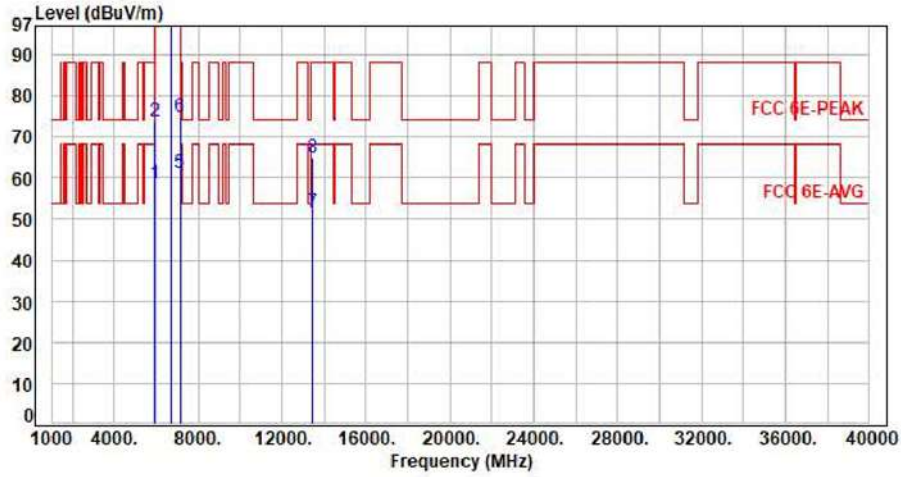


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.00	58.73	68.20	-9.47	Average	100	74	P
2	5925.00	7.73	65.98	73.71	88.20	-14.49	Peak	100	74	P
3	6725.00	9.22	99.48	108.70	200.00	-91.30	Average	100	74	P
4	6725.00	9.22	111.62	120.84	200.00	-79.16	Peak	100	74	P
5	7125.00	11.08	50.22	61.30	68.20	-6.90	Average	100	74	P
6	7125.00	11.08	63.94	75.02	88.20	-13.18	Peak	100	74	P
7	13450.00	20.96	30.71	51.67	68.20	-16.53	Average	100	224	P
8	13450.00	20.96	44.05	65.01	88.20	-23.19	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

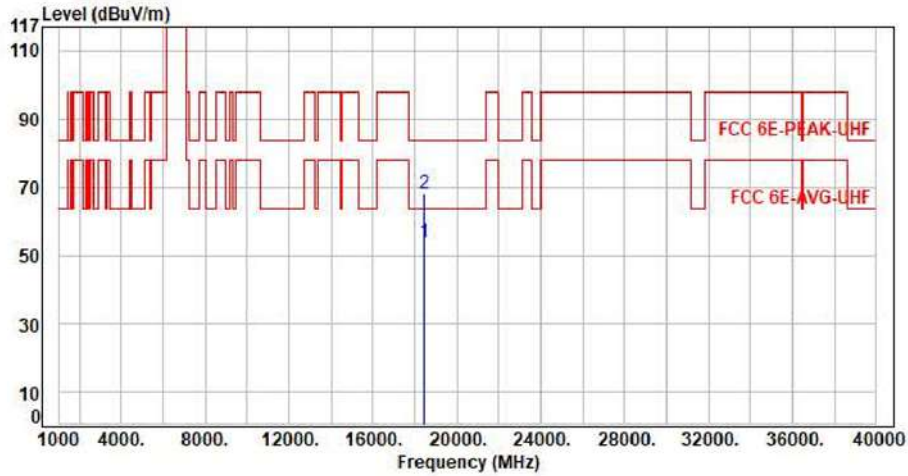


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	43.67	53.87	63.54	-9.67	Average	150	360	P
2	18435.00	10.20	57.81	68.01	83.54	-15.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

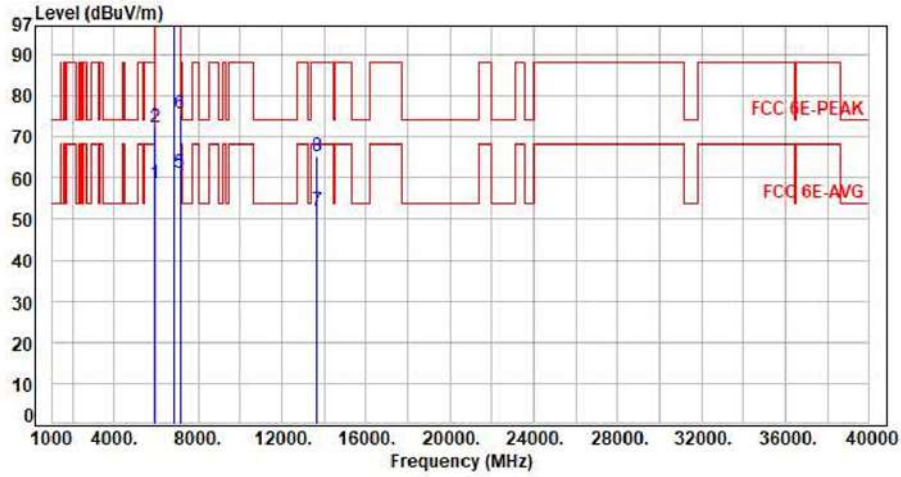


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	50.94	58.67	68.20	-9.53	Average	216	3	P
2	5925.00	7.73	64.53	72.26	88.20	-15.94	Peak	216	3	P
3	6845.00	9.48	94.41	103.89	200.00	-96.11	Average	216	3	P
4	6845.00	9.48	106.83	116.31	200.00	-83.69	Peak	216	3	P
5	7125.00	11.08	50.22	61.30	68.20	-6.90	Average	216	3	P
6	7125.00	11.08	64.41	75.49	88.20	-12.71	Peak	216	3	P
7	13690.00	21.62	30.38	52.00	68.20	-16.20	Average	100	126	P
8	13690.00	21.62	43.52	65.14	88.20	-23.06	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

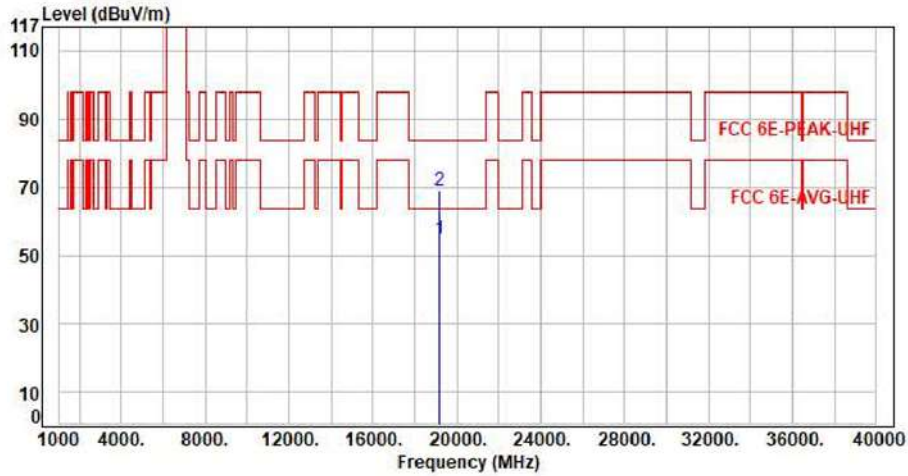


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	43.36	54.70	63.54	-8.84	Average	150	360	P
2	19155.00	11.34	57.67	69.01	83.54	-14.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

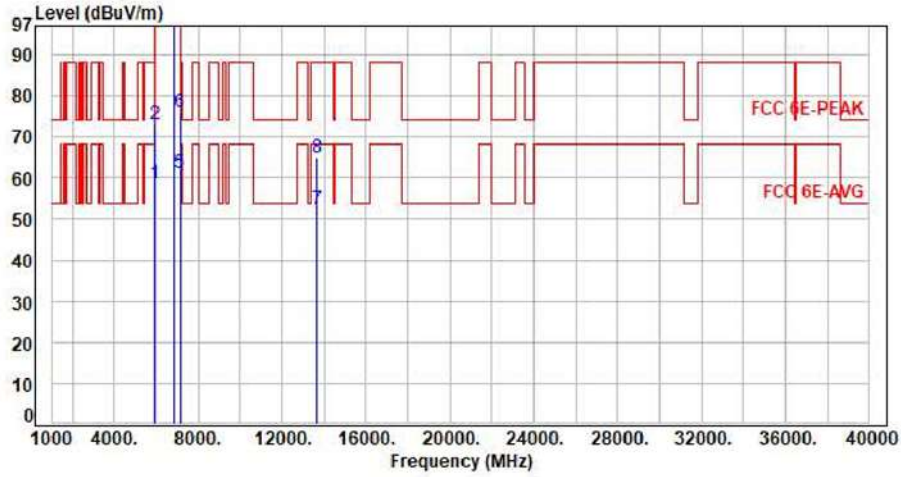


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	51.02	58.75	68.20	-9.45	Average	100	69	P
2	5925.00	7.73	65.36	73.09	88.20	-15.11	Peak	100	69	P
3	6845.00	9.48	98.53	108.01	200.00	-91.99	Average	100	69	P
4	6845.00	9.48	111.06	120.54	200.00	-79.46	Peak	100	69	P
5	7125.00	11.08	50.21	61.29	68.20	-6.91	Average	100	69	P
6	7125.00	11.08	64.91	75.99	88.20	-12.21	Peak	100	69	P
7	13690.00	21.62	30.83	52.45	68.20	-15.75	Average	100	222	P
8	13690.00	21.62	43.41	65.03	88.20	-23.17	Peak	100	222	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

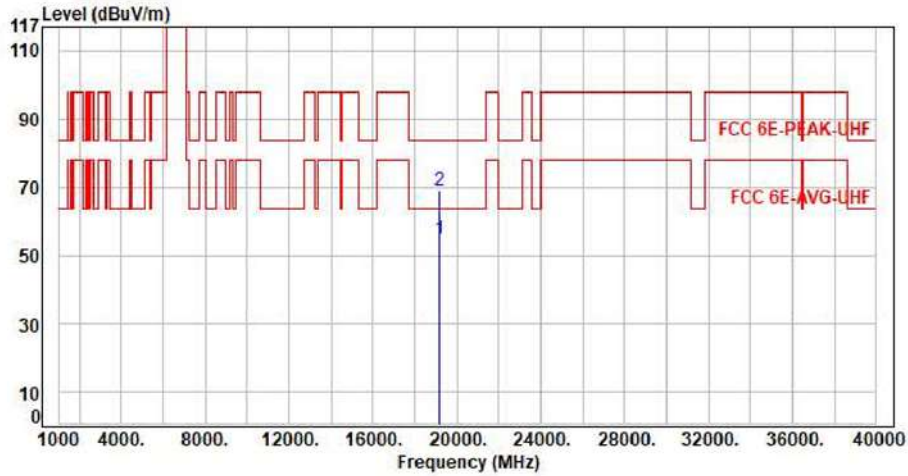


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	43.45	54.79	63.54	-8.75	Average	150	360	P
2	19155.00	11.34	57.49	68.83	83.54	-14.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

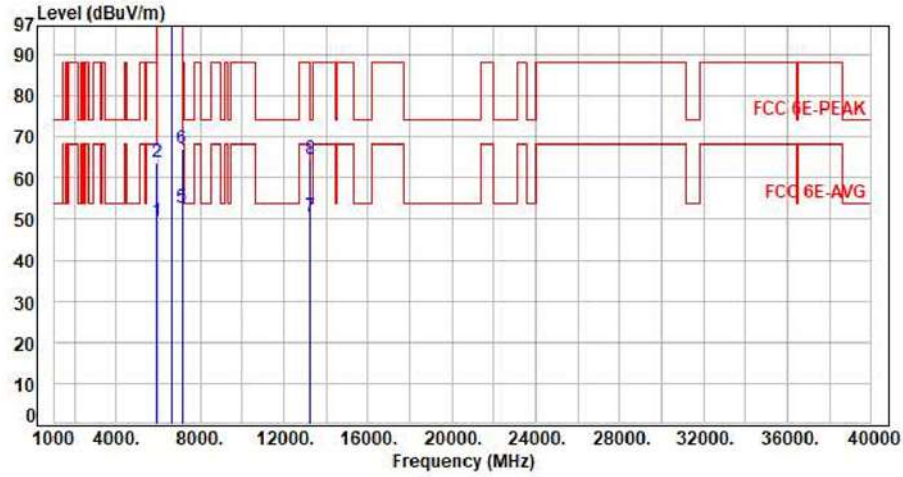


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.62	49.35	68.20	-18.85	Average	167	4	P
2	5925.00	7.73	55.98	63.71	88.20	-24.49	Peak	167	4	P
3	6625.00	8.97	94.13	103.10	200.00	-96.90	Average	167	4	P
4	6625.00	8.97	106.42	115.39	200.00	-84.61	Peak	167	4	P
5	7125.00	11.08	41.66	52.74	68.20	-15.46	Average	167	4	P
6	7125.00	11.08	56.08	67.16	88.20	-21.04	Peak	167	4	P
7	13250.00	20.15	30.48	50.63	54.00	-3.37	Average	100	124	P
8	13250.00	20.15	44.26	64.41	74.00	-9.59	Peak	100	124	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

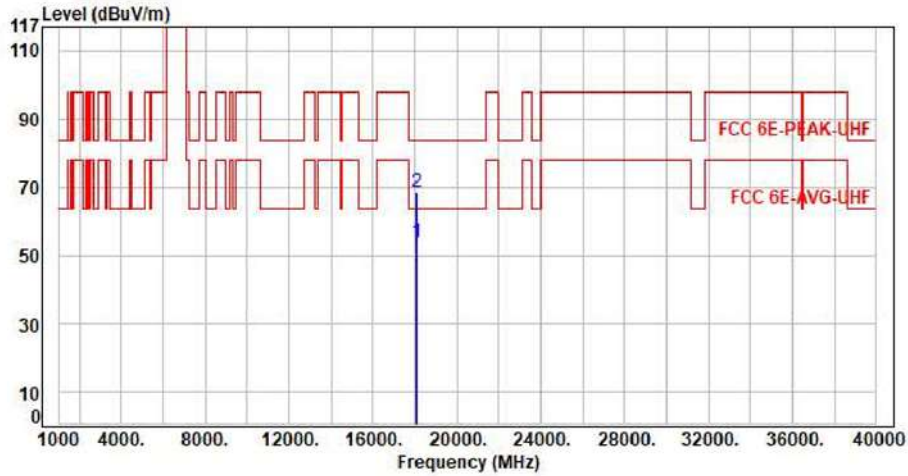


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	44.08	53.98	63.54	-9.56	Average	150	360	P
2	18075.00	9.90	58.63	68.53	83.54	-15.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

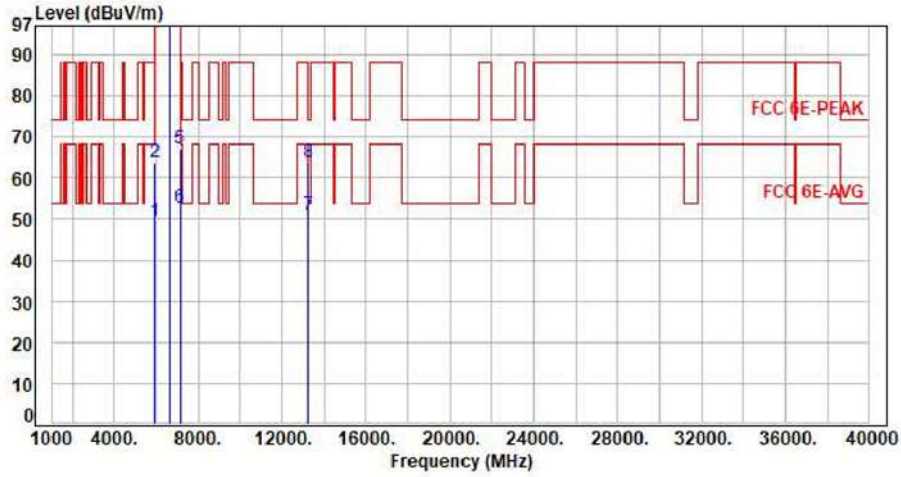


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.53	49.26	68.20	-18.94	Average	100	79	P
2	5925.00	7.73	56.18	63.91	68.20	-4.29	Average	100	79	P
3	6625.00	8.97	96.36	105.33	200.00	-94.67	Average	100	79	P
4	6625.00	8.97	108.39	117.36	200.00	-82.64	Peak	100	79	P
5	7125.00	11.08	55.98	67.06	88.20	-21.14	Peak	100	79	P
6	7125.00	11.08	41.59	52.67	88.20	-35.53	Peak	100	79	P
7	13250.00	20.15	30.58	50.73	54.00	-3.27	Average	100	226	P
8	13250.00	20.15	43.65	63.80	74.00	-10.20	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

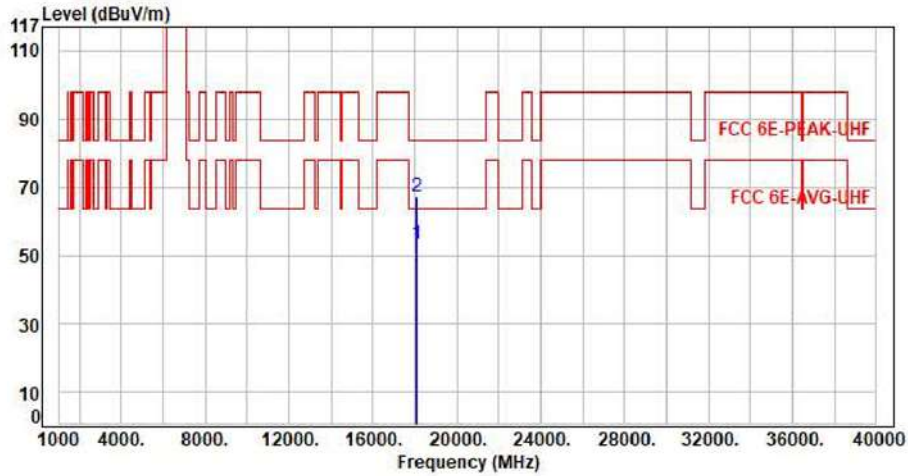


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	43.70	53.60	63.54	-9.94	Average	150	360	P
2	18075.00	9.90	57.49	67.39	83.54	-16.15	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

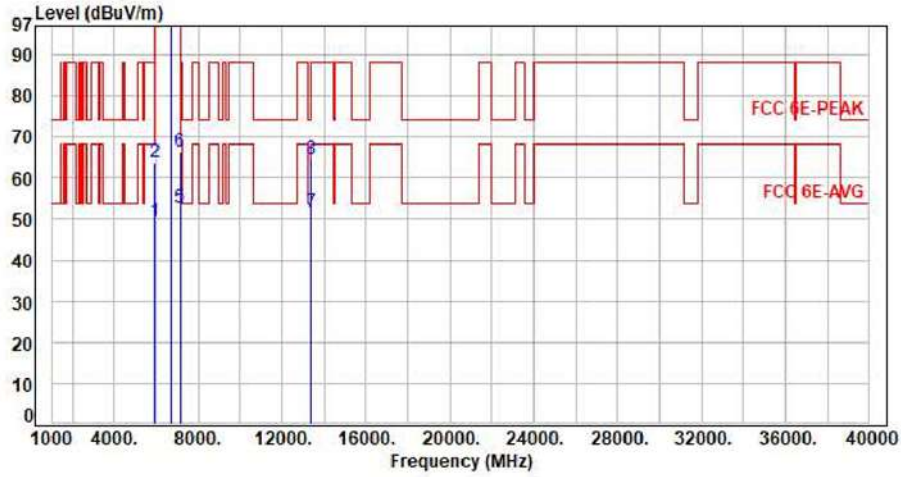


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.52	49.25	68.20	-18.95	Average	100	0	P
2	5925.00	7.73	56.17	63.90	88.20	-24.30	Peak	100	0	P
3	6705.00	9.18	93.15	102.33	200.00	-97.67	Average	100	0	P
4	6705.00	9.18	106.53	115.71	200.00	-84.29	Peak	100	0	P
5	7125.00	11.08	41.53	52.61	68.20	-15.59	Average	100	0	P
6	7125.00	11.08	55.43	66.51	88.20	-21.69	Peak	100	0	P
7	13410.00	20.87	30.69	51.56	68.20	-16.64	Average	100	126	P
8	13410.00	20.87	43.66	64.53	88.20	-23.67	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

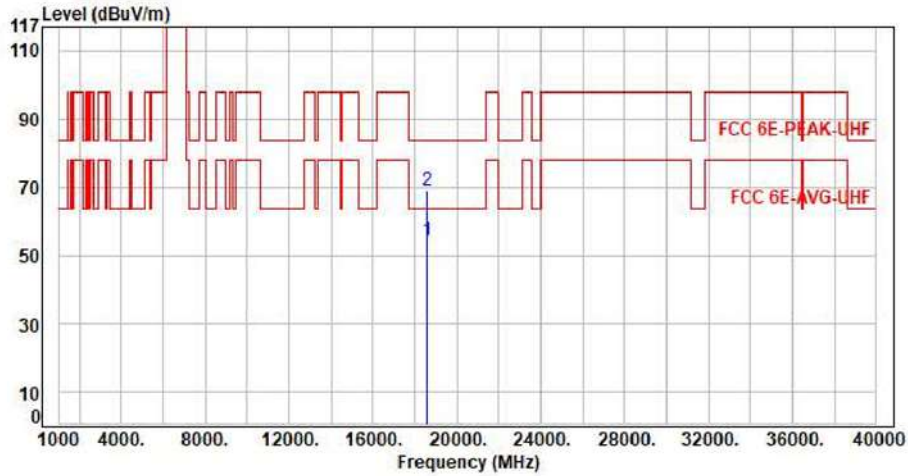


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	43.57	54.23	63.54	-9.31	Average	150	360	P
2	18555.00	10.66	58.21	68.87	83.54	-14.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

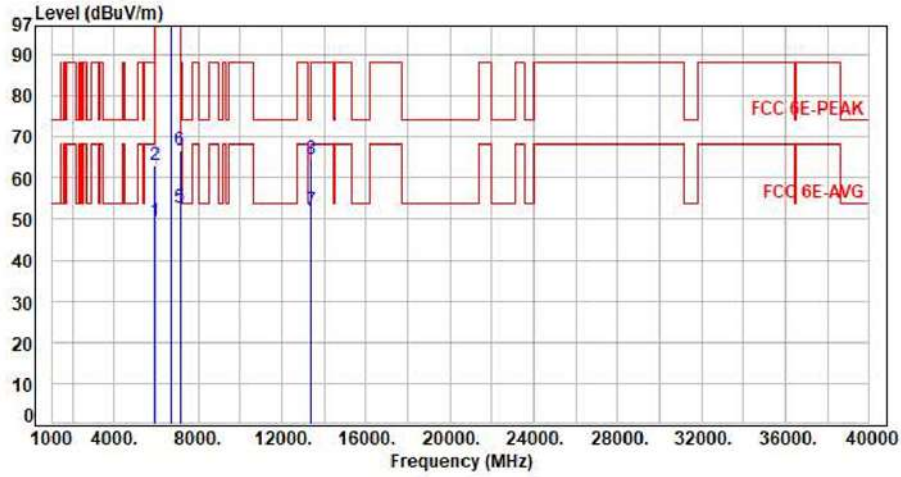


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.52	49.25	68.20	-18.95	Average	100	72	P
2	5925.00	7.73	55.17	62.90	88.20	-25.30	Peak	100	72	P
3	6705.00	9.18	98.46	107.64	200.00	-92.36	Average	100	72	P
4	6705.00	9.18	111.58	120.76	200.00	-79.24	Peak	100	72	P
5	7125.00	11.08	41.54	52.62	68.20	-15.58	Average	100	72	P
6	7125.00	11.08	55.68	66.76	88.20	-21.44	Peak	100	72	P
7	13410.00	20.87	31.21	52.08	68.20	-16.12	Average	100	223	P
8	13410.00	20.87	43.60	64.47	88.20	-23.73	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

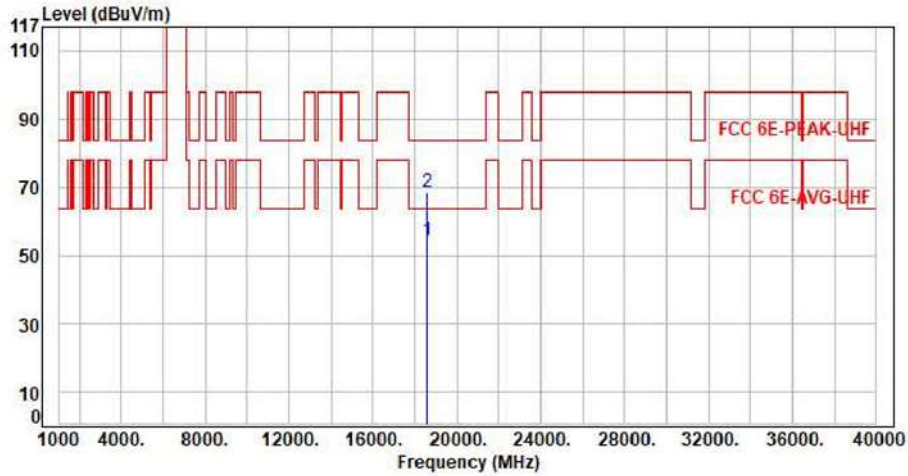


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	43.68	54.34	63.54	-9.20	Average	150	360	P
2	18555.00	10.66	57.70	68.36	83.54	-15.18	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

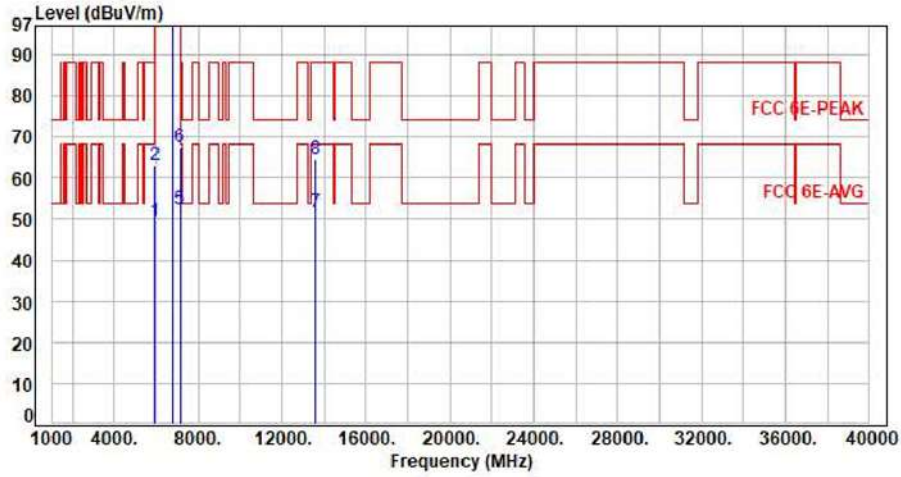

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.53	49.26	68.20	-18.94	Average	100	0	P
2	5925.00	7.73	55.50	63.23	88.20	-24.97	Peak	100	0	P
3	6785.00	9.41	92.95	102.36	200.00	-97.64	Average	100	0	P
4	6785.00	9.41	105.95	115.36	200.00	-84.64	Peak	100	0	P
5	7125.00	11.08	41.39	52.47	68.20	-15.73	Average	100	0	P
6	7125.00	11.08	56.50	67.58	88.20	-20.62	Peak	100	0	P
7	13570.00	21.14	30.62	51.76	68.20	-16.44	Average	100	127	P
8	13570.00	21.14	43.35	64.49	88.20	-23.71	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor