




Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

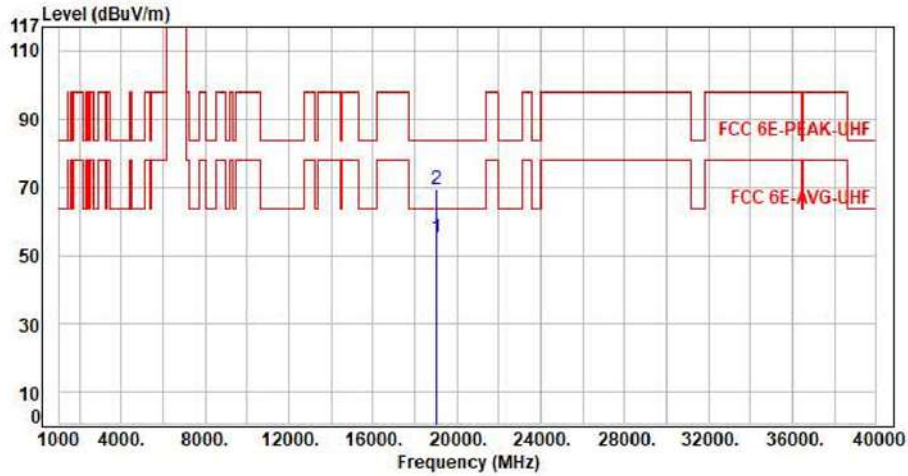


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	43.59	55.00	63.54	-8.54	Average	150	360	P
2	19035.00	11.41	57.94	69.35	83.54	-14.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

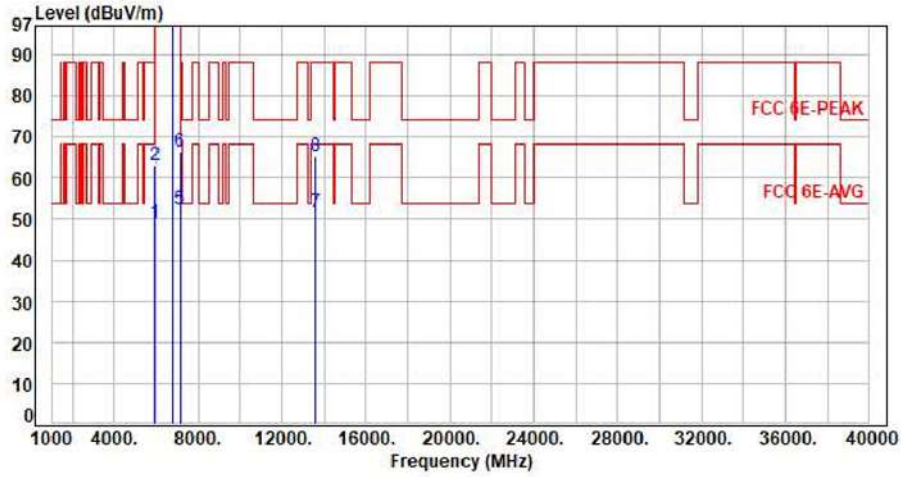


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.46	49.19	68.20	-19.01	Average	100	65	P
2	5925.00	7.73	55.51	63.24	88.20	-24.96	Peak	100	65	P
3	6785.00	9.41	96.88	106.29	200.00	-93.71	Average	100	65	P
4	6785.00	9.41	110.35	119.76	200.00	-80.24	Peak	100	65	P
5	7125.00	11.08	41.44	52.52	68.20	-15.68	Average	100	65	P
6	7125.00	11.08	55.48	66.56	88.20	-21.64	Peak	100	65	P
7	13570.00	21.14	30.64	51.78	68.20	-16.42	Average	100	226	P
8	13570.00	21.14	44.12	65.26	88.20	-22.94	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

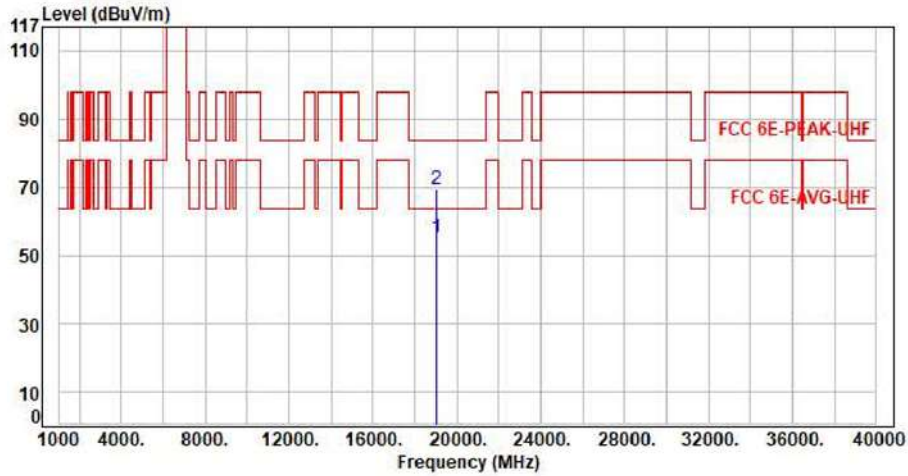


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	43.58	54.99	63.54	-8.55	Average	150	360	P
2	19035.00	11.41	57.82	69.23	83.54	-14.31	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

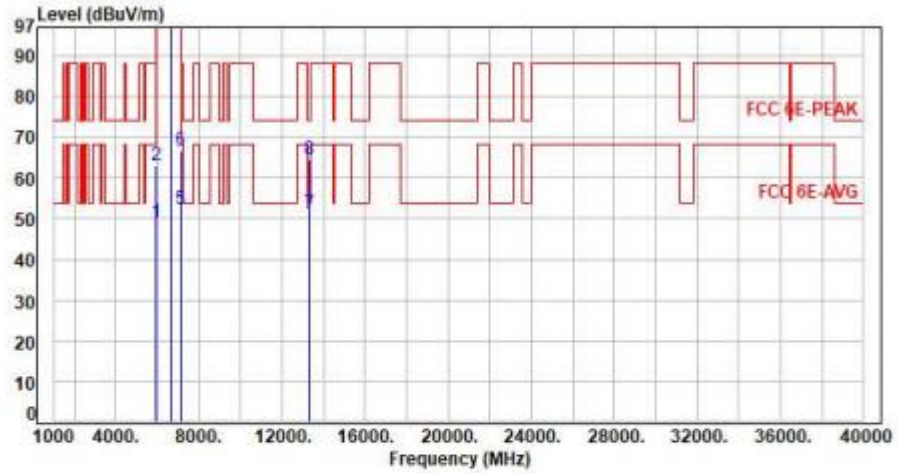


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.45	49.18	68.20	-19.02	Average	122	3	P
2	5925.00	7.73	55.30	63.03	88.20	-25.17	Peak	122	3	P
3	6665.00	9.10	90.21	99.31	200.00	-100.69	Average	122	3	P
4	6665.00	9.10	102.24	111.34	200.00	-88.66	Peak	122	3	P
5	7125.00	11.08	41.29	52.37	68.20	-15.83	Average	122	3	P
6	7125.00	11.08	55.70	66.78	88.20	-21.42	Peak	122	3	P
7	13330.00	20.51	30.66	51.17	54.00	-2.83	Average	100	127	P
8	13330.00	20.51	44.16	64.67	74.00	-9.33	Peak	100	127	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

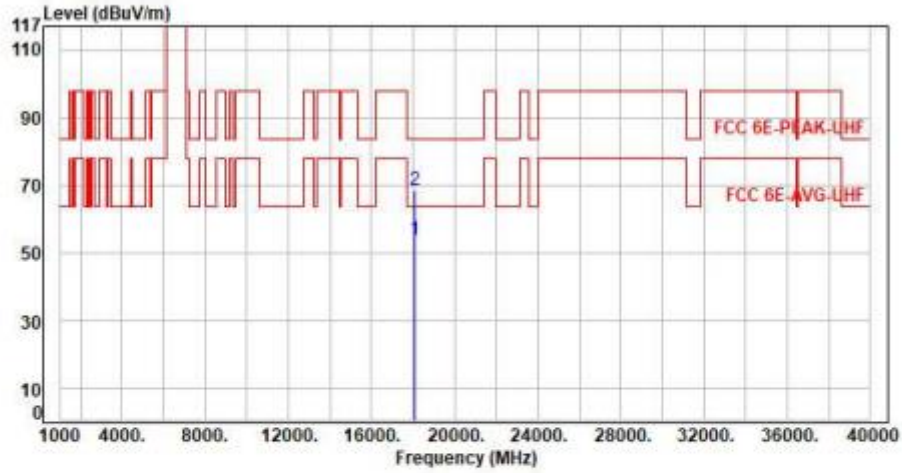


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	43.95	53.85	63.54	-9.69	Average	150	360	P
2	18075.00	9.90	58.58	68.48	83.54	-15.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

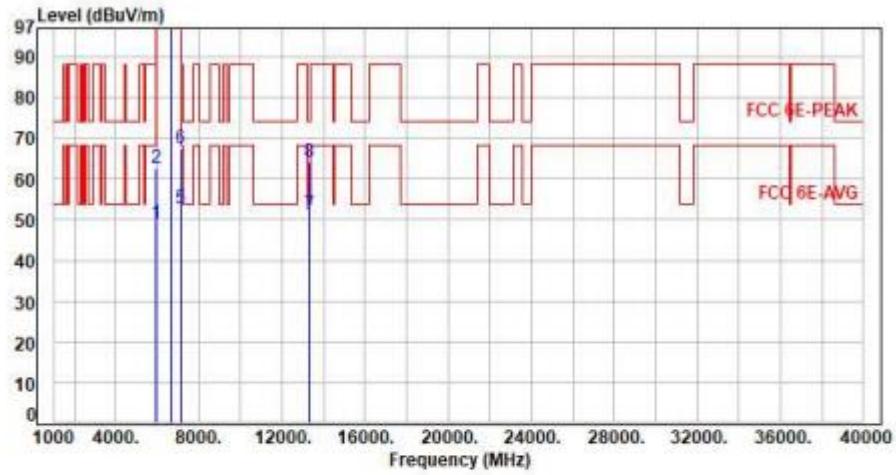


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.49	49.22	68.20	-18.98	Average	100	76	P
2	5925.00	7.73	55.13	62.86	88.20	-25.34	Peak	100	76	P
3	6665.00	9.10	94.49	103.59	200.00	-96.41	Average	100	76	P
4	6665.00	9.10	108.05	117.15	200.00	-82.85	Peak	100	76	P
5	7125.00	11.08	41.48	52.56	68.20	-15.64	Average	100	76	P
6	7125.00	11.08	56.40	67.48	88.20	-20.72	Peak	100	76	P
7	13330.00	20.51	30.90	51.41	54.00	-2.59	Average	100	228	P
8	13330.00	20.51	43.58	64.09	74.00	-9.91	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

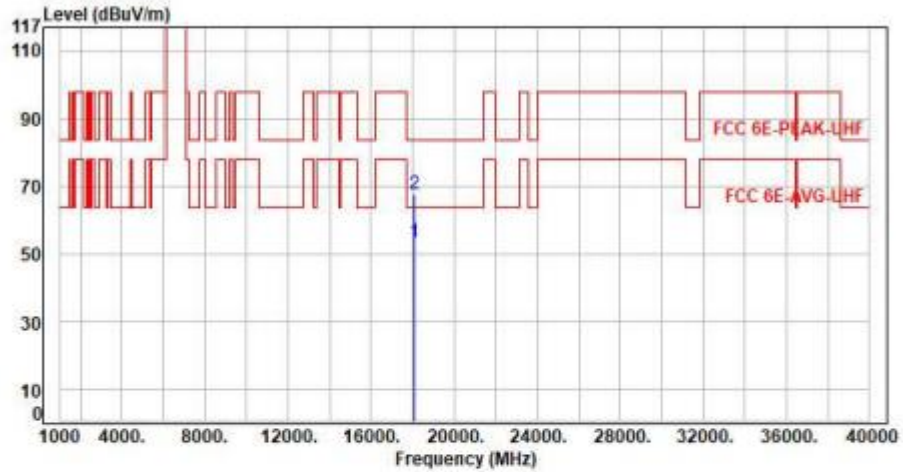


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	43.66	53.56	63.54	-9.98	Average	150	360	P
2	18075.00	9.90	57.58	67.48	83.54	-16.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

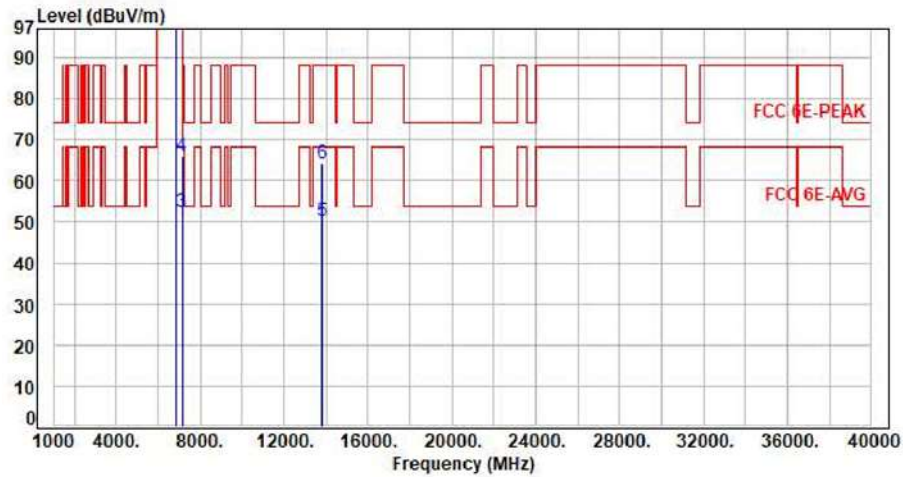


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	94.02	103.50	200.00	-96.50	Average	253	319	P
2	6895.00	9.48	103.71	113.19	200.00	-86.81	Peak	253	319	P
3	7125.00	9.92	42.58	52.50	68.20	-15.70	Average	253	319	P
4	7125.00	9.92	56.17	66.09	88.20	-22.11	Peak	253	319	P
5	13790.00	21.66	28.50	50.16	68.20	-18.04	Average	100	118	P
6	13790.00	21.66	42.47	64.13	88.20	-24.07	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

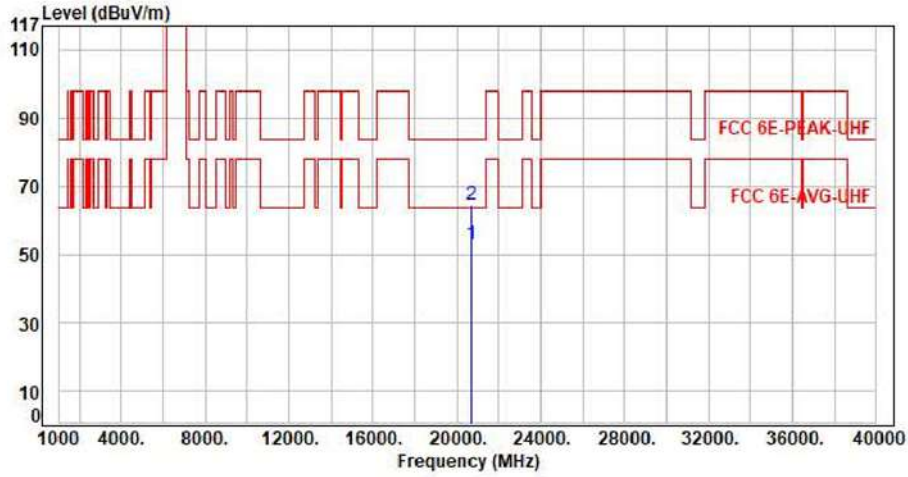


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	41.73	52.77	63.54	-10.77	Average	150	360	P
2	20685.00	11.04	53.63	64.67	83.54	-18.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

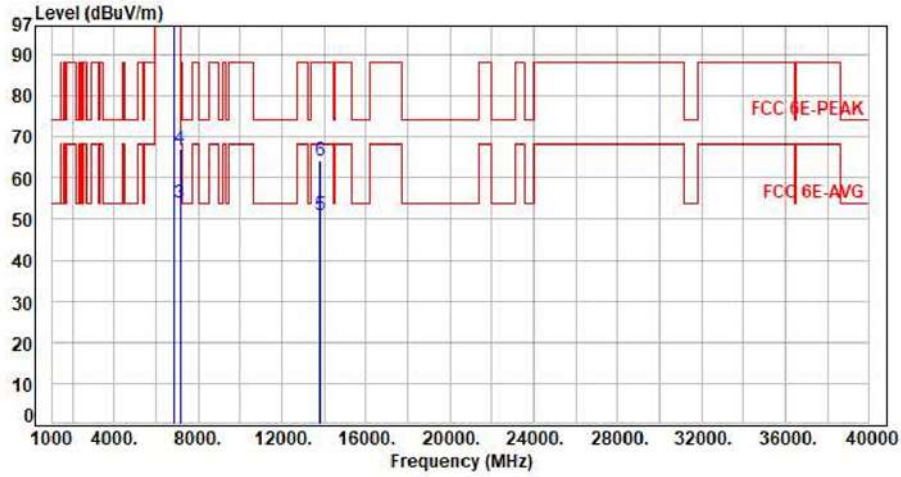


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	97.69	107.17	200.00	-92.83	Average	267	73	P
2	6895.00	9.48	107.42	116.90	200.00	-83.10	Peak	267	73	P
3	7125.00	11.08	42.66	53.74	68.20	-14.46	Average	267	73	P
4	7125.00	11.08	55.88	66.96	88.20	-21.24	Peak	267	73	P
5	13790.00	21.99	28.77	50.76	68.20	-17.44	Average	100	192	P
6	13790.00	21.99	42.15	64.14	88.20	-24.06	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

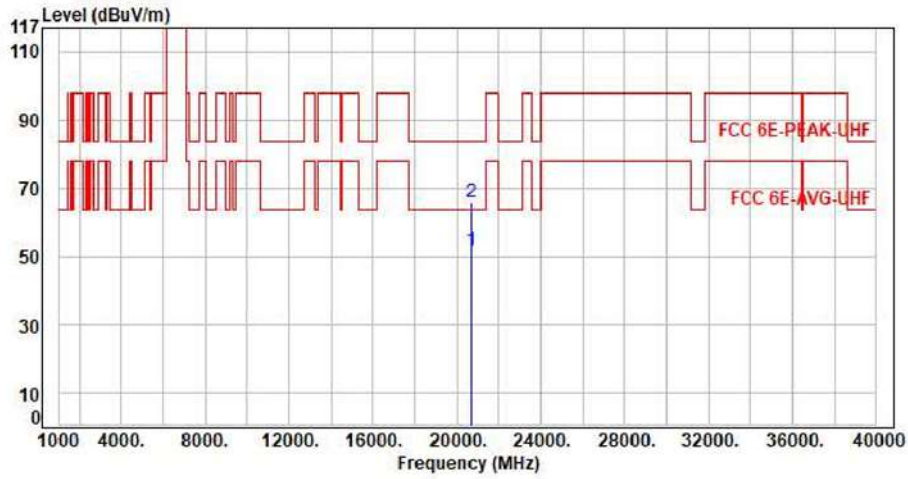


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	40.56	51.60	63.54	-11.94	Average	150	360	P
2	20685.00	11.04	54.79	65.83	83.54	-17.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

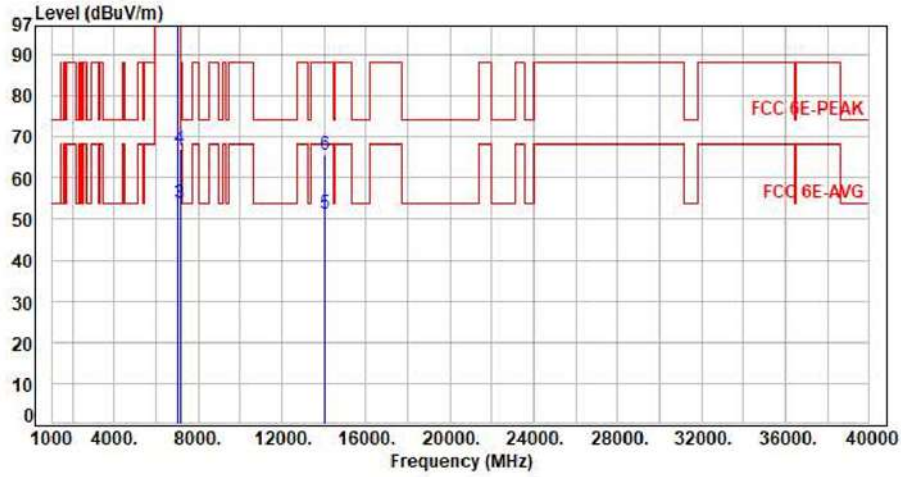


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	10.87	96.37	107.24	200.00	-92.76	Average	104	14	P
2	7015.00	10.87	106.11	116.98	200.00	-83.02	Peak	104	14	P
3	7125.00	11.08	42.69	53.77	68.20	-14.43	Average	104	14	P
4	7125.00	11.08	55.91	66.99	88.20	-21.21	Peak	104	14	P
5	14030.00	22.66	28.78	51.44	68.20	-16.76	Average	100	166	P
6	14030.00	22.66	42.85	65.51	88.20	-22.69	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

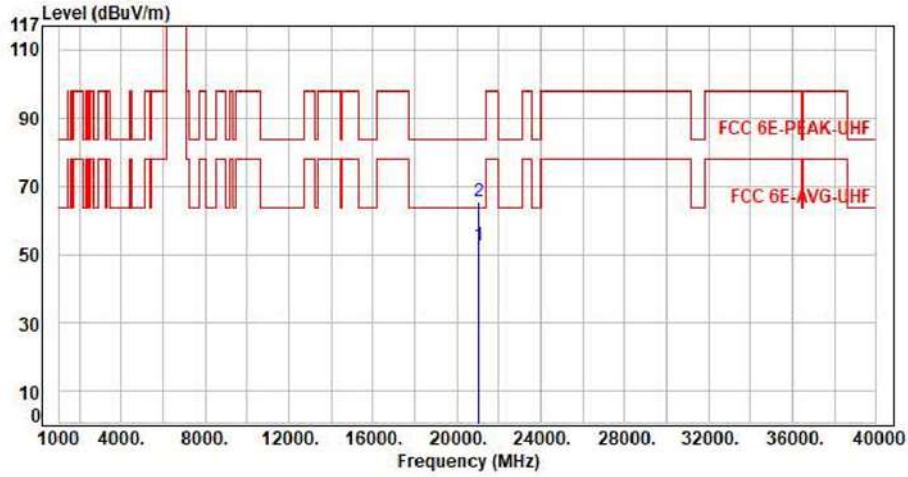


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	41.00	52.50	63.54	-11.04	Average	150	360	P
2	21045.00	11.50	53.85	65.35	83.54	-18.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

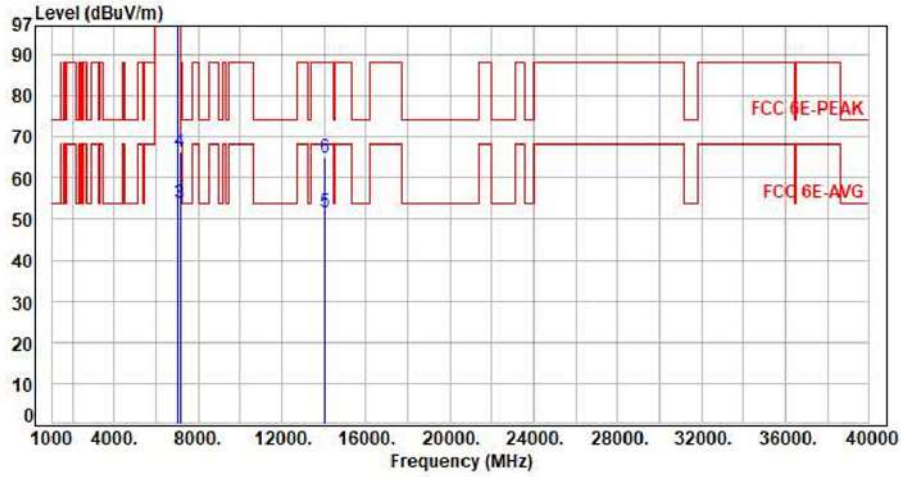


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	10.87	101.02	111.89	200.00	-88.11	Average	262	70	P
2	7015.00	10.87	110.87	121.74	200.00	-78.26	Peak	262	70	P
3	7125.00	11.08	42.76	53.84	68.20	-14.36	Average	262	70	P
4	7125.00	11.08	55.31	66.39	88.20	-21.81	Peak	262	70	P
5	14030.00	22.66	28.91	51.57	68.20	-16.63	Average	100	228	P
6	14030.00	22.66	42.26	64.92	88.20	-23.28	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

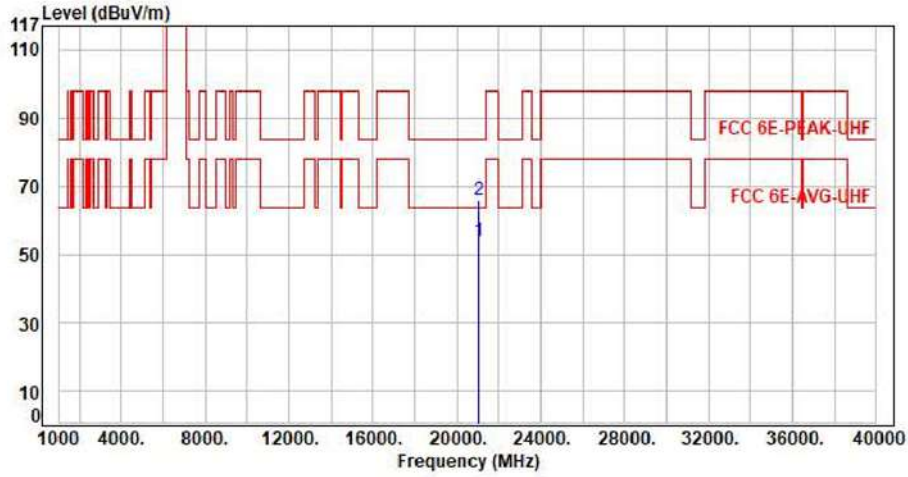


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	42.16	53.66	63.54	-9.88	Average	150	360	P
2	21045.00	11.50	54.54	66.04	83.54	-17.50	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

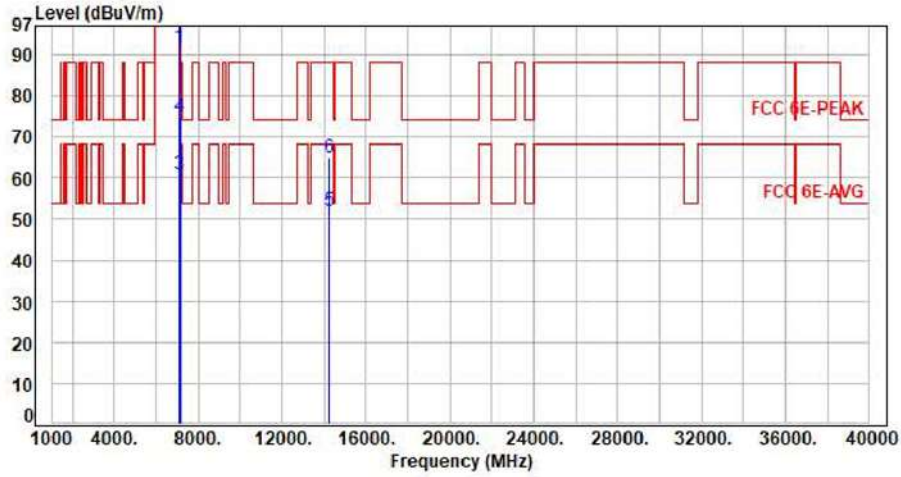


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	82.14	92.01	200.00	-107.99	Average	100	38	P
2	7115.00	9.87	93.37	103.24	200.00	-96.76	Peak	100	38	P
3	7125.00	9.92	50.99	60.91	68.20	-7.29	Average	100	38	P
4	7125.00	9.92	65.12	75.04	88.20	-13.16	Peak	100	38	P
5	14230.00	22.90	29.20	52.10	88.20	-36.10	Peak	100	118	P
6	14230.00	22.90	42.19	65.09	88.20	-23.11	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

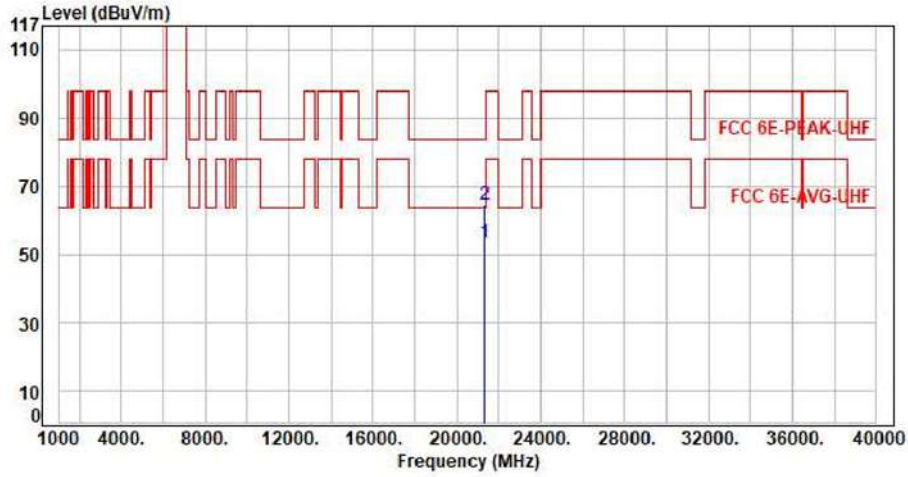


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	41.92	53.28	63.54	-10.26	Average	150	360	P
2	21345.00	11.36	53.34	64.70	83.54	-18.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

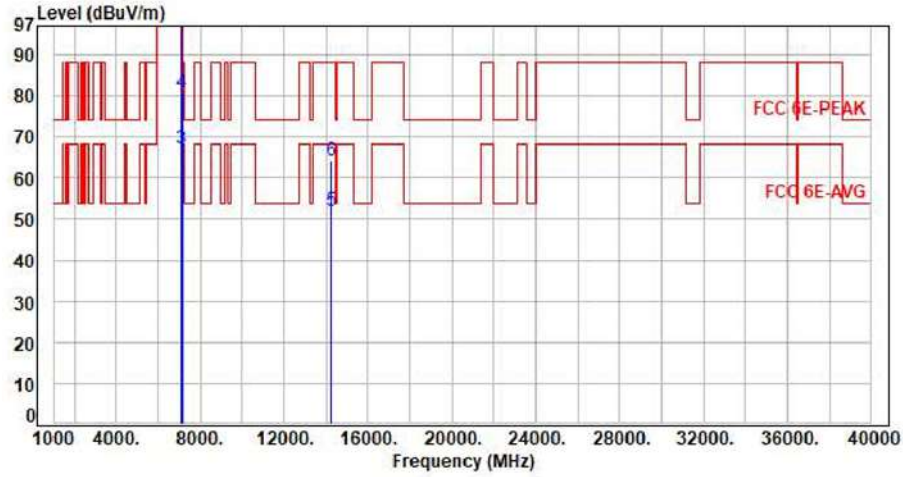


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	88.47	98.34	200.00	-101.66	Average	278	59	P
2	7115.00	9.87	99.20	109.07	200.00	-90.93	Peak	278	59	P
3	7125.00	9.92	57.06	66.98	68.20	-1.22	Average	278	59	P
4	7125.00	9.92	70.73	80.65	88.20	-7.55	Peak	278	59	P
5	14230.00	22.90	29.19	52.09	68.20	-16.11	Average	100	255	P
6	14230.00	22.90	41.39	64.29	88.20	-23.91	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

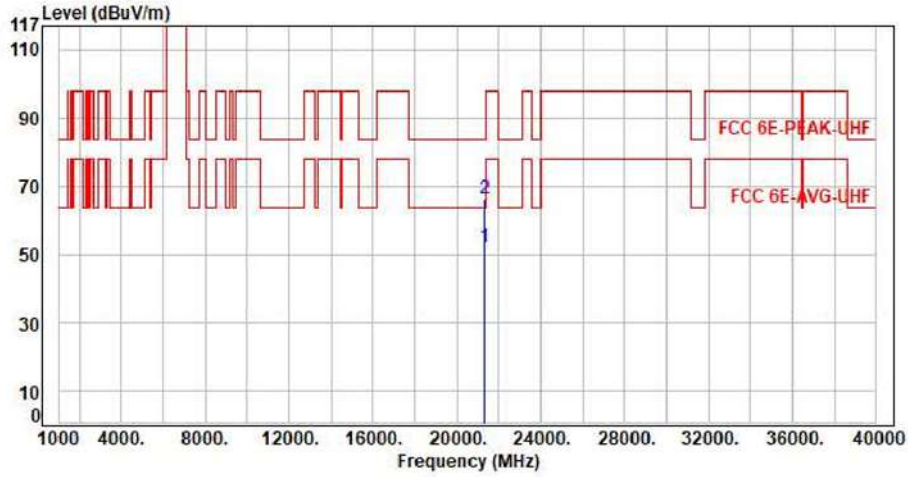


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	40.54	51.90	63.54	-11.64	Average	150	360	P
2	21345.00	11.36	54.86	66.22	83.54	-17.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

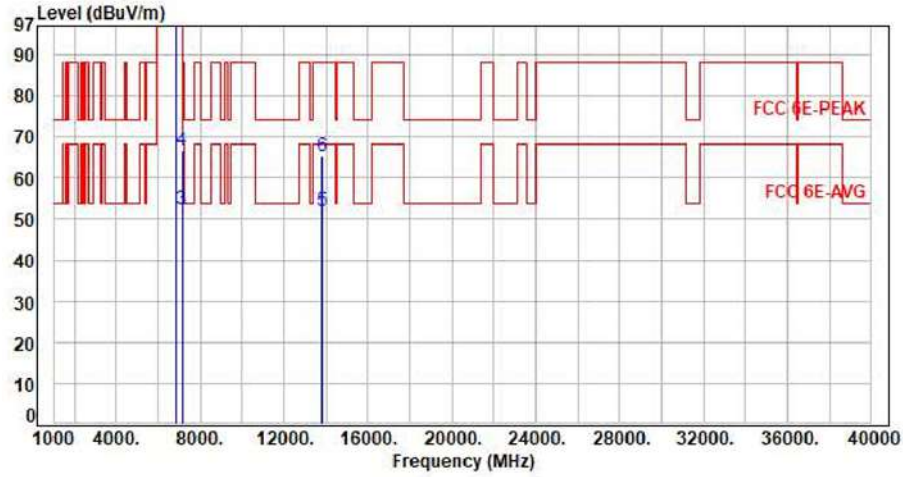


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	95.66	105.14	200.00	-94.86	Average	217	14	P
2	6895.00	9.48	108.33	117.81	200.00	-82.19	Peak	217	14	P
3	7125.00	11.08	41.42	52.50	68.20	-15.70	Average	217	14	P
4	7125.00	11.08	55.70	66.78	88.20	-21.42	Peak	217	14	P
5	13790.00	21.99	30.15	52.14	68.20	-16.06	Average	100	124	P
6	13790.00	21.99	43.46	65.45	88.20	-22.75	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

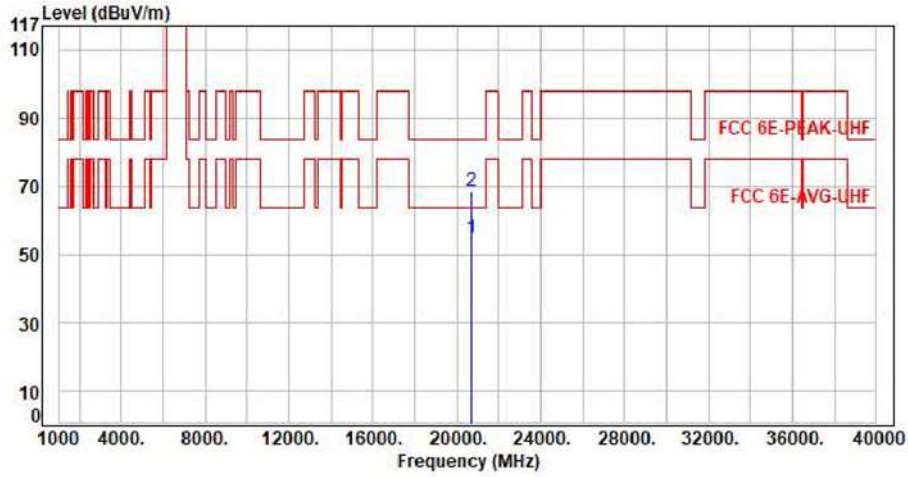


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	43.60	54.64	63.54	-8.90	Average	150	360	P
2	20685.00	11.04	57.58	68.62	83.54	-14.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

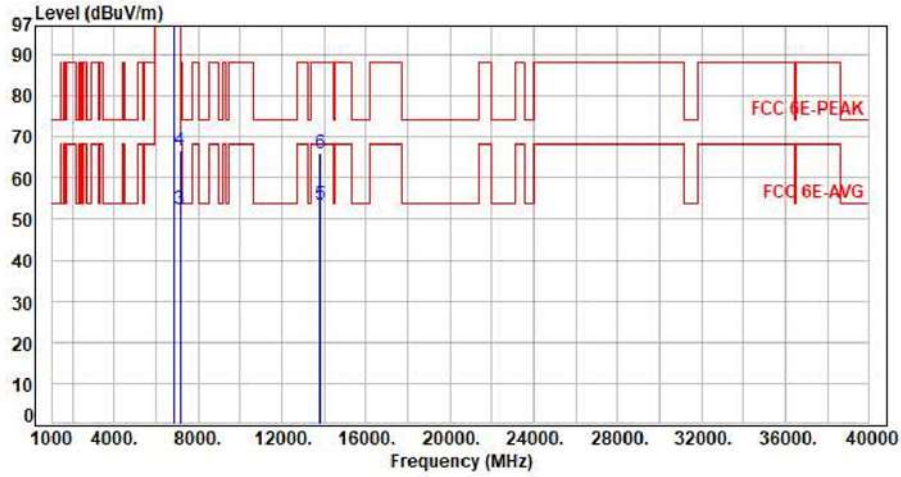


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	100.19	109.67	200.00	-90.33	Average	258	74	P
2	6895.00	9.48	113.33	122.81	200.00	-77.19	Peak	258	74	P
3	7125.00	11.08	41.42	52.50	68.20	-15.70	Average	258	74	P
4	7125.00	11.08	55.58	66.66	88.20	-21.54	Peak	258	74	P
5	13790.00	21.99	31.38	53.37	68.20	-14.83	Average	100	218	P
6	13790.00	21.99	44.12	66.11	88.20	-22.09	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

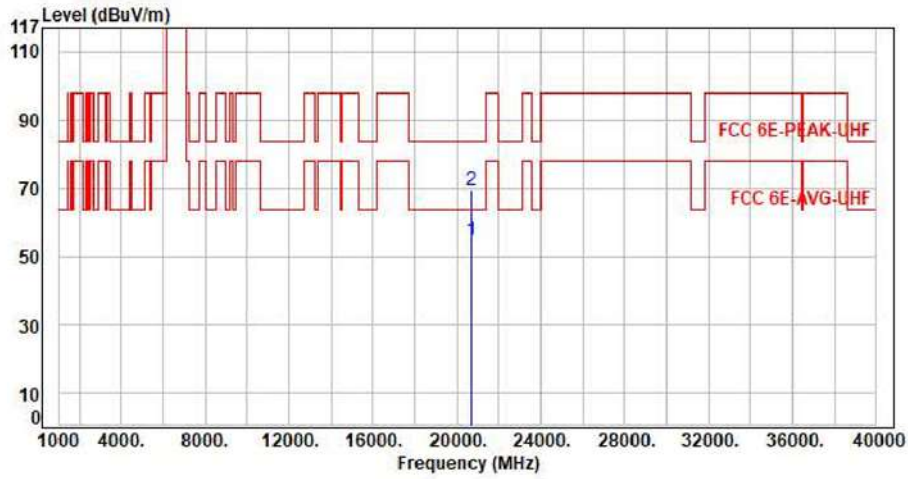


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	43.57	54.61	63.54	-8.93	Average	150	360	P
2	20685.00	11.04	58.22	69.26	83.54	-14.28	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

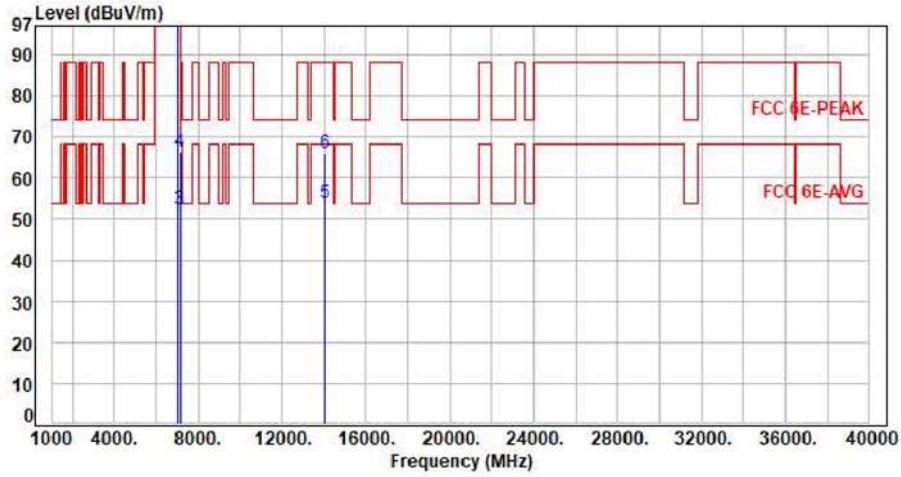


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	10.87	99.30	110.17	200.00	-89.83	Average	117	12	P
2	7015.00	10.87	113.11	123.98	200.00	-76.02	Peak	117	12	P
3	7125.00	11.08	41.47	52.55	68.20	-15.65	Average	117	12	P
4	7125.00	11.08	55.32	66.40	88.20	-21.80	Peak	117	12	P
5	14030.00	22.66	31.23	53.89	68.20	-14.31	Average	100	128	P
6	14030.00	22.66	43.46	66.12	88.20	-22.08	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

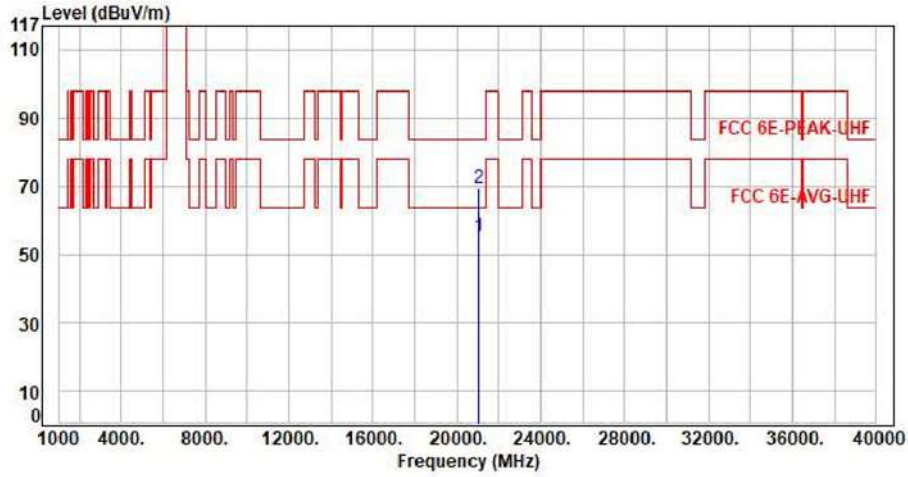


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	43.75	55.25	63.54	-8.29	Average	150	360	P
2	21045.00	11.50	57.87	69.37	83.54	-14.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

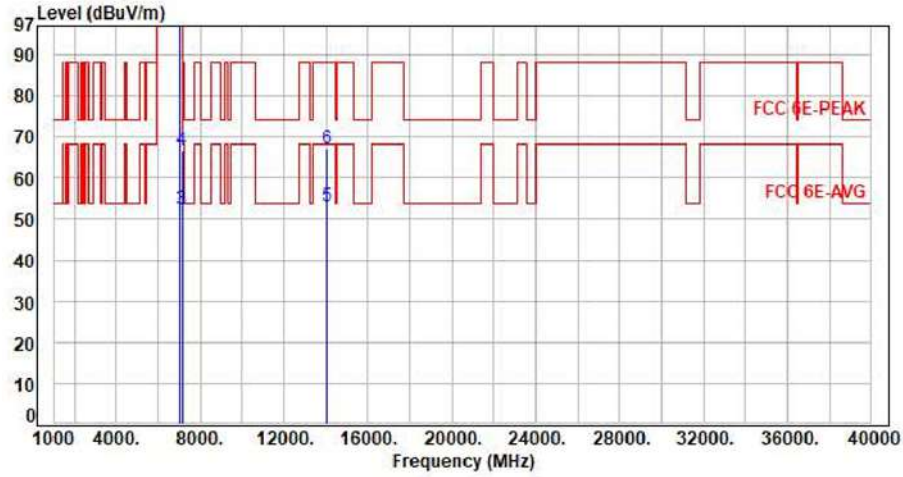


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	10.87	101.65	112.52	200.00	-87.48	Average	100	9	P
2	7015.00	10.87	114.90	125.77	200.00	-74.23	Peak	100	9	P
3	7125.00	11.08	41.45	52.53	68.20	-15.67	Average	100	9	P
4	7125.00	11.08	55.56	66.64	88.20	-21.56	Peak	100	9	P
5	14030.00	22.66	30.49	53.15	68.20	-15.05	Average	100	226	P
6	14030.00	22.66	44.55	67.21	88.20	-20.99	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

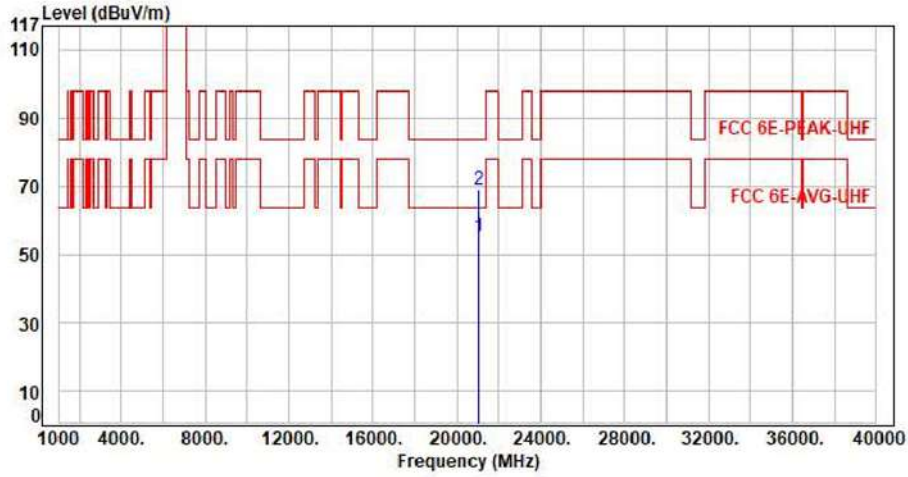


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	43.44	54.94	63.54	-8.60	Average	150	360	P
2	21045.00	11.50	57.39	68.89	83.54	-14.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

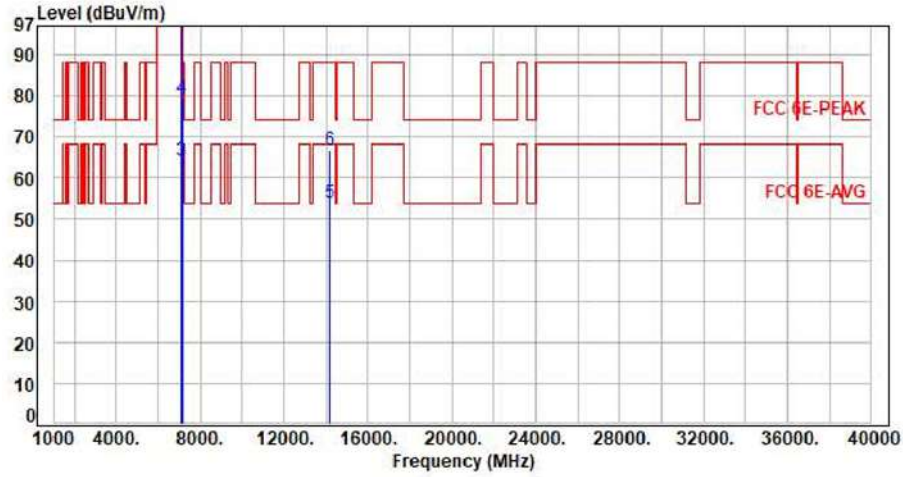


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	10.98	99.01	109.99	200.00	-90.01	Average	107	12	P
2	7095.00	10.98	112.24	123.22	200.00	-76.78	Peak	107	12	P
3	7125.00	11.08	52.96	64.04	68.20	-4.16	Average	107	12	P
4	7125.00	11.08	68.04	79.12	88.20	-9.08	Peak	107	12	P
5	14190.00	23.10	30.66	53.76	68.20	-14.44	Average	100	124	P
6	14190.00	23.10	43.49	66.59	88.20	-21.61	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

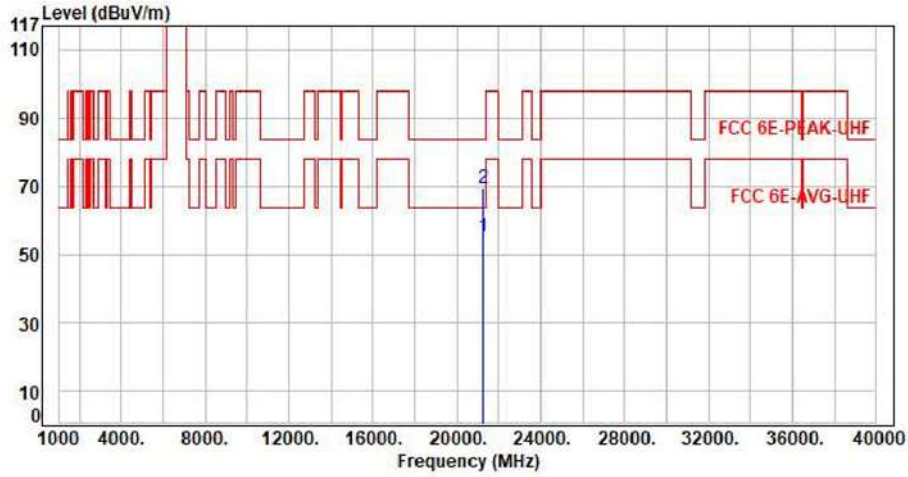


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	43.54	55.34	63.54	-8.20	Average	150	360	P
2	21285.00	11.80	57.71	69.51	83.54	-14.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

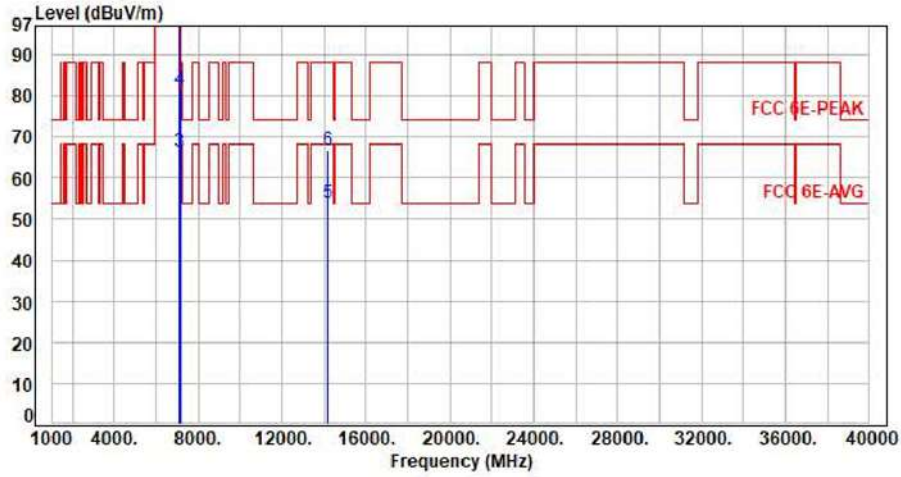


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	10.98	102.53	113.51	200.00	-86.49	Average	258	61	P
2	7095.00	10.98	116.26	127.24	200.00	-72.76	Peak	258	61	P
3	7125.00	11.08	55.25	66.33	68.20	-1.87	Average	258	61	P
4	7125.00	11.08	70.41	81.49	88.20	-6.71	Peak	258	61	P
5	14190.00	23.10	30.83	53.93	68.20	-14.27	Average	100	221	P
6	14190.00	23.10	43.74	66.84	88.20	-21.36	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

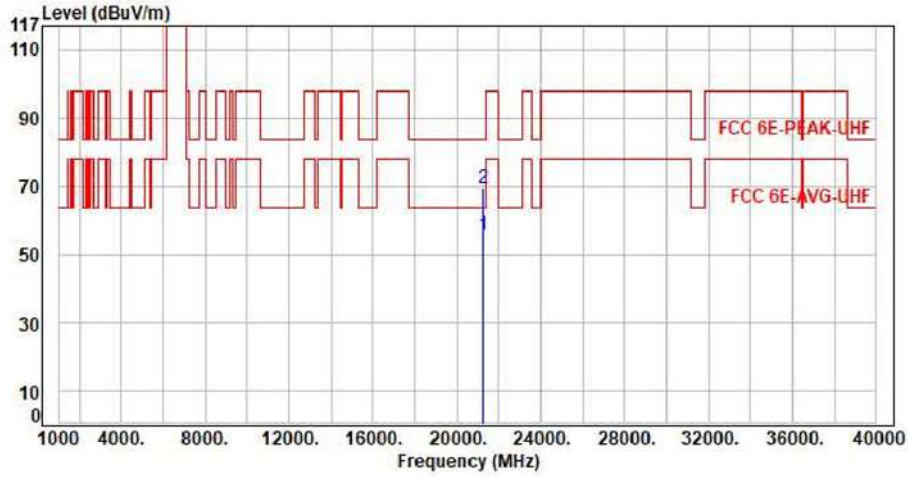


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	43.85	55.65	63.54	-7.89	Average	150	360	P
2	21285.00	11.80	57.55	69.35	83.54	-14.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

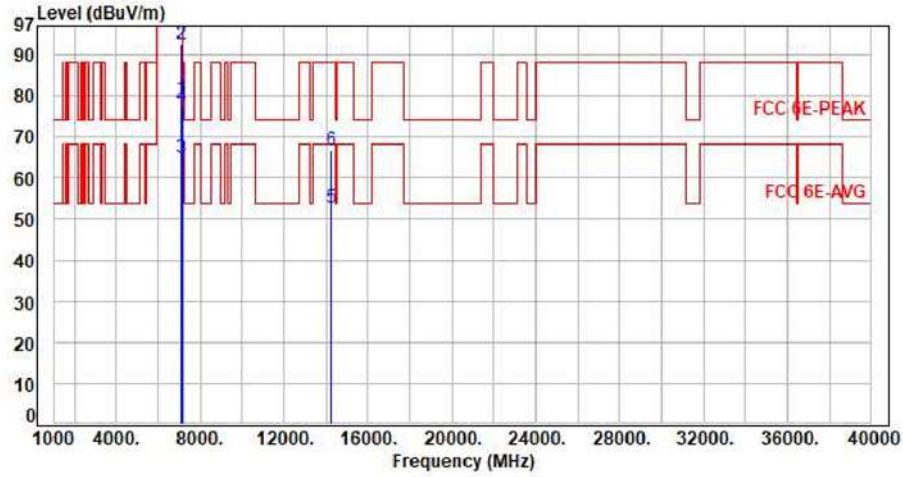


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.04	68.09	79.13	200.00	-120.87	Average	111	12	P
2	7115.00	11.04	81.72	92.76	200.00	-107.24	Peak	111	12	P
3	7125.00	11.08	53.66	64.74	68.20	-3.46	Average	111	12	P
4	7125.00	11.08	66.28	77.36	88.20	-10.84	Peak	111	12	P
5	14230.00	23.23	29.59	52.82	68.20	-15.38	Average	100	124	P
6	14230.00	23.23	43.37	66.60	88.20	-21.60	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

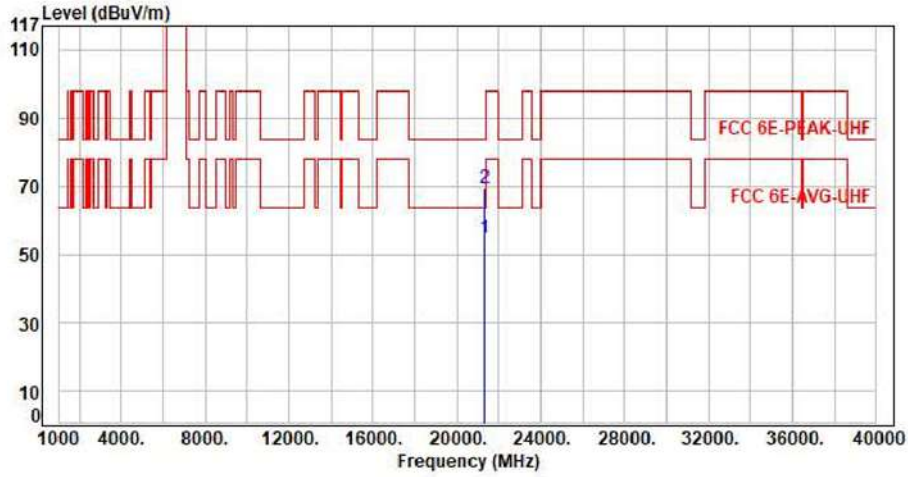


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	43.33	54.69	63.54	-8.85	Average	150	360	P
2	21345.00	11.36	57.94	69.30	83.54	-14.24	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

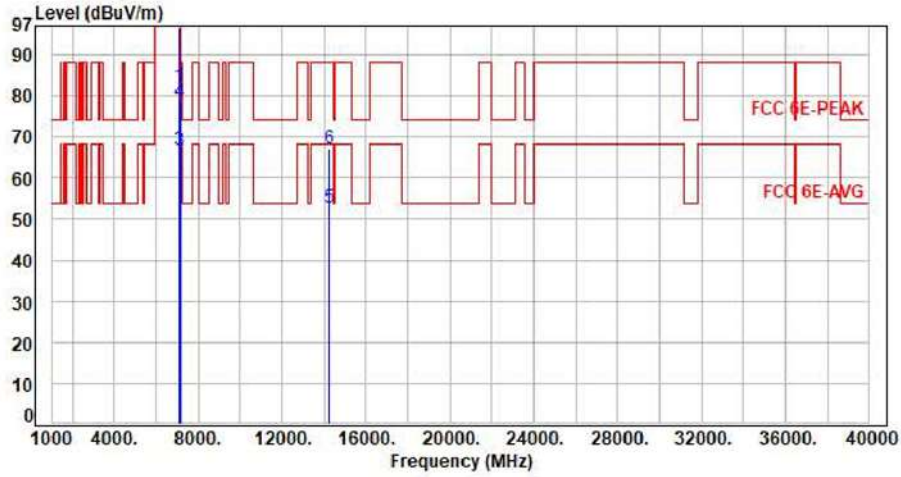


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	11.04	71.18	82.22	200.00	-117.78	Average	220	27	P
2	7115.00	11.04	85.43	96.47	200.00	-103.53	Peak	220	27	P
3	7125.00	11.08	55.71	66.79	68.20	-1.41	Average	220	27	P
4	7125.00	11.08	67.51	78.59	88.20	-9.61	Peak	220	27	P
5	14230.00	23.23	29.53	52.76	68.20	-15.44	Average	100	221	P
6	14230.00	23.23	43.89	67.12	88.20	-21.08	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

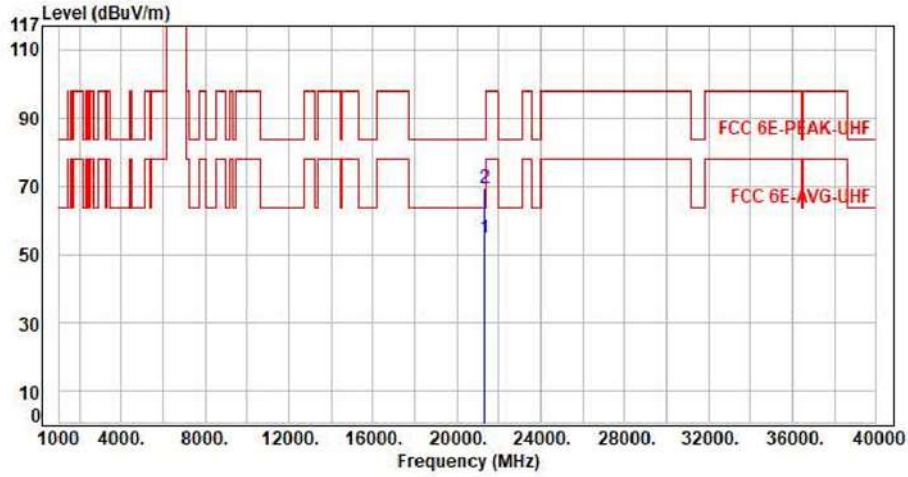


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	43.45	54.81	63.54	-8.73	Average	150	360	P
2	21345.00	11.36	58.18	69.54	83.54	-14.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

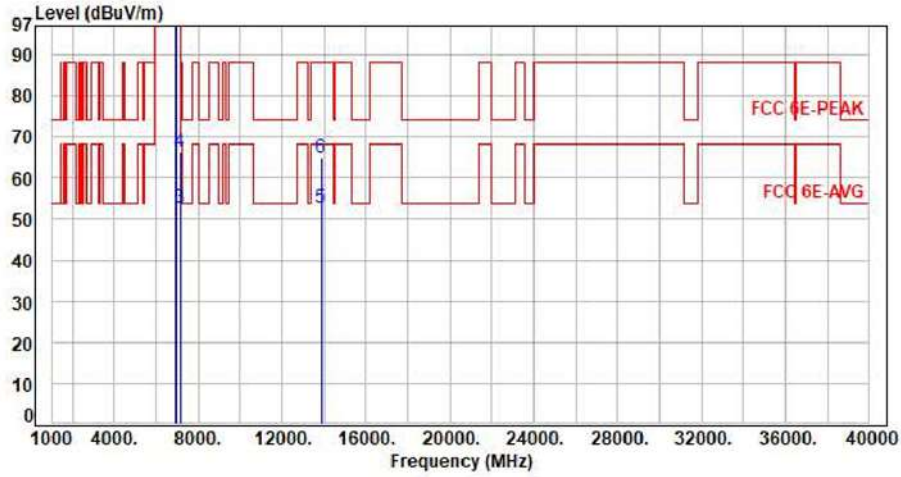


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	94.20	103.72	200.00	-96.28	Average	225	14	P
2	6925.00	9.52	107.44	116.96	200.00	-83.04	Peak	225	14	P
3	7125.00	11.08	41.49	52.57	68.20	-15.63	Average	225	14	P
4	7125.00	11.08	55.25	66.33	88.20	-21.87	Peak	225	14	P
5	13850.00	22.16	30.54	52.70	68.20	-15.50	Average	100	122	P
6	13850.00	22.16	42.68	64.84	88.20	-23.36	Peak	100	122	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

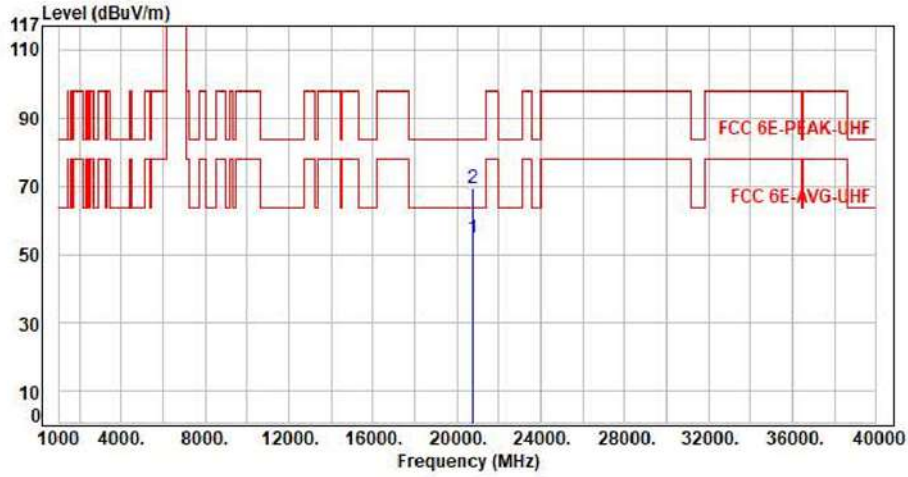


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	43.20	54.59	63.54	-8.95	Average	150	360	P
2	20775.00	11.39	58.03	69.42	83.54	-14.12	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

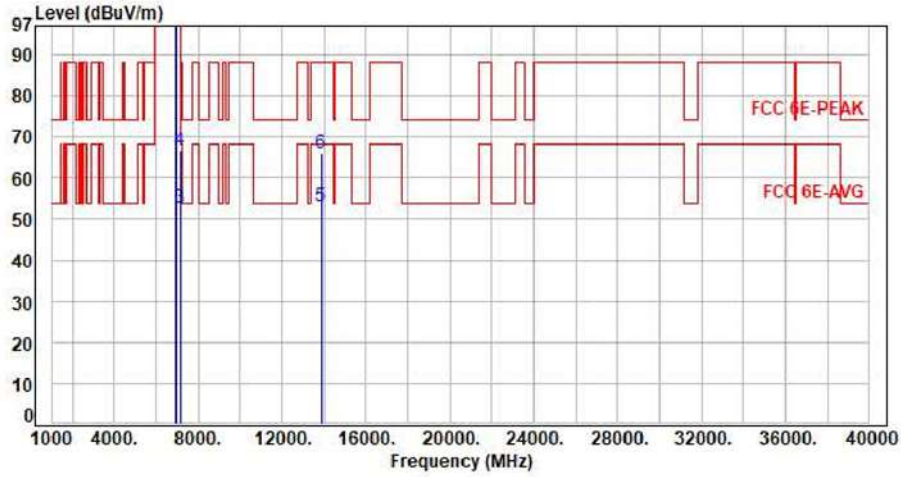


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.52	98.38	107.90	200.00	-92.10	Average	263	69	P
2	6925.00	9.52	112.52	122.04	200.00	-77.96	Peak	263	69	P
3	7125.00	11.08	41.59	52.67	68.20	-15.53	Average	263	69	P
4	7125.00	11.08	55.56	66.64	88.20	-21.56	Peak	263	69	P
5	13850.00	22.16	30.84	53.00	68.20	-15.20	Average	100	226	P
6	13850.00	22.16	43.75	65.91	88.20	-22.29	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

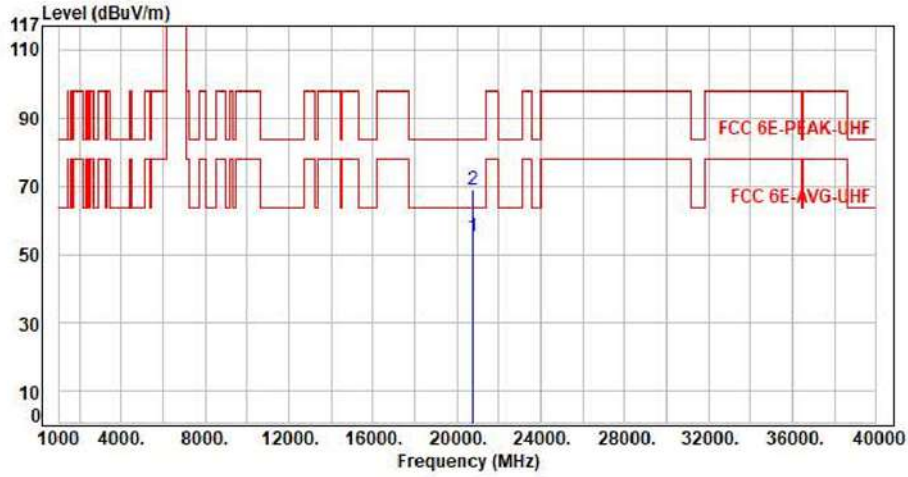


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	43.77	55.16	63.54	-8.38	Average	150	360	P
2	20775.00	11.39	57.74	69.13	83.54	-14.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

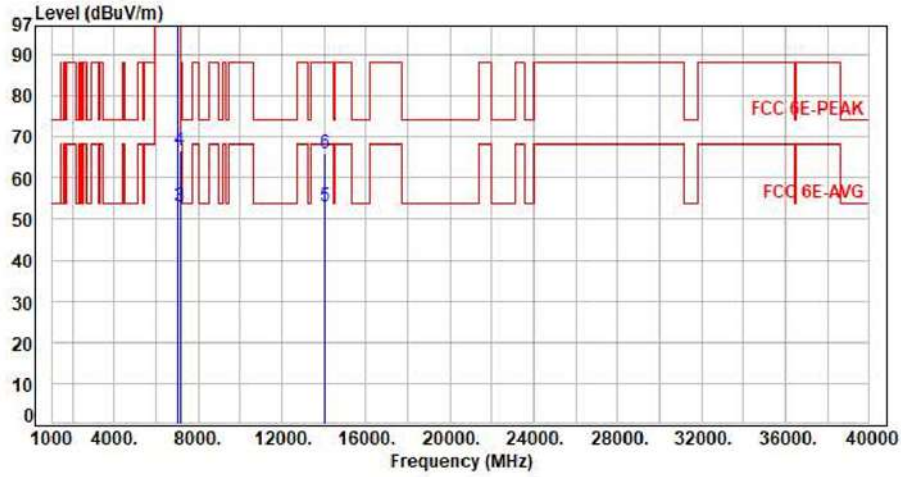


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	10.87	97.39	108.26	200.00	-91.74	Average	209	10	P
2	7005.00	10.87	109.55	120.42	200.00	-79.58	Peak	209	10	P
3	7125.00	11.08	41.86	52.94	68.20	-15.26	Average	209	10	P
4	7125.00	11.08	55.53	66.61	88.20	-21.59	Peak	209	10	P
5	14010.00	22.59	30.70	53.29	68.20	-14.91	Average	100	123	P
6	14010.00	22.59	43.54	66.13	88.20	-22.07	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

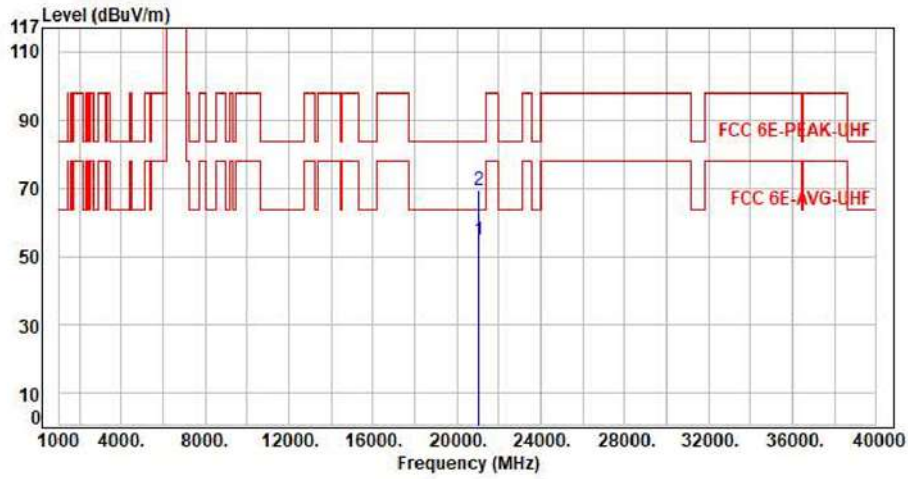


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	43.40	54.88	63.54	-8.66	Average	150	360	P
2	21015.00	11.48	57.90	69.38	83.54	-14.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

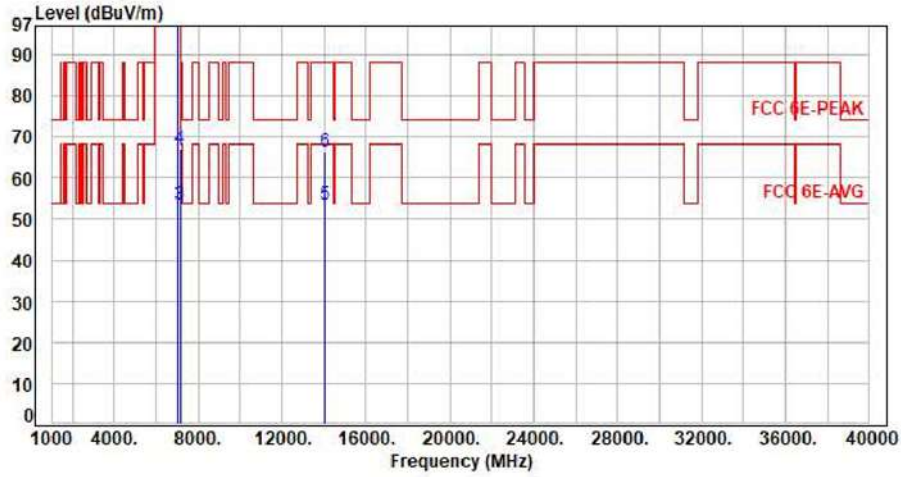


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	10.87	99.85	110.72	200.00	-89.28	Average	100	6	P
2	7005.00	10.87	111.31	122.18	200.00	-77.82	Peak	100	6	P
3	7125.00	11.08	42.38	53.46	68.20	-14.74	Average	100	6	P
4	7125.00	11.08	55.89	66.97	88.20	-21.23	Peak	100	6	P
5	14010.00	22.59	30.74	53.33	68.20	-14.87	Average	100	226	P
6	14010.00	22.59	43.67	66.26	88.20	-21.94	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

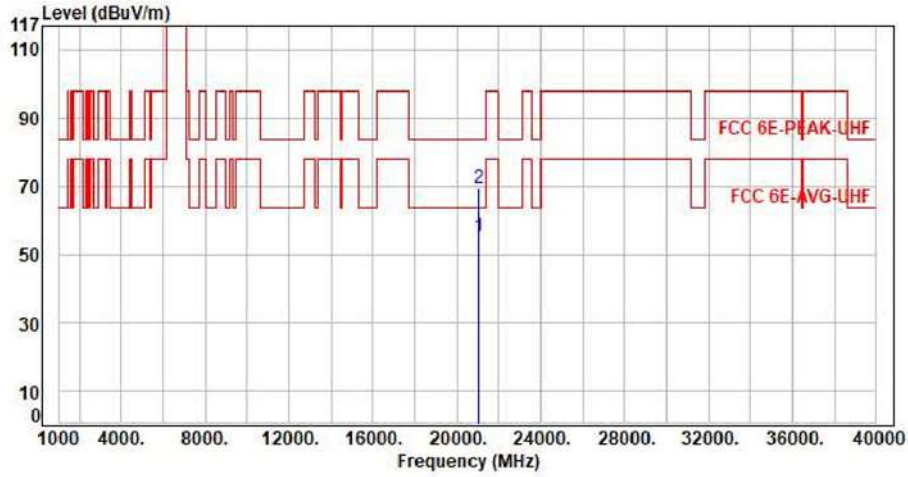


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	43.60	55.08	63.54	-8.46	Average	150	360	P
2	21015.00	11.48	57.88	69.36	83.54	-14.18	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

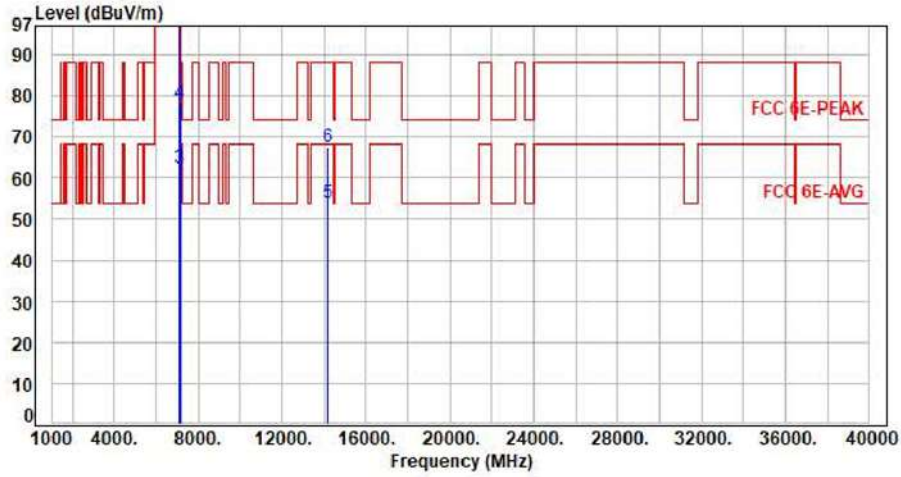


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	10.95	95.03	105.98	200.00	-94.02	Average	103	13	P
2	7085.00	10.95	108.92	119.87	200.00	-80.13	Peak	103	13	P
3	7125.00	11.08	51.33	62.41	68.20	-5.79	Average	103	13	P
4	7125.00	11.08	67.29	78.37	88.20	-9.83	Peak	103	13	P
5	14170.00	23.03	30.89	53.92	68.20	-14.28	Average	100	124	P
6	14170.00	23.03	44.41	67.44	88.20	-20.76	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

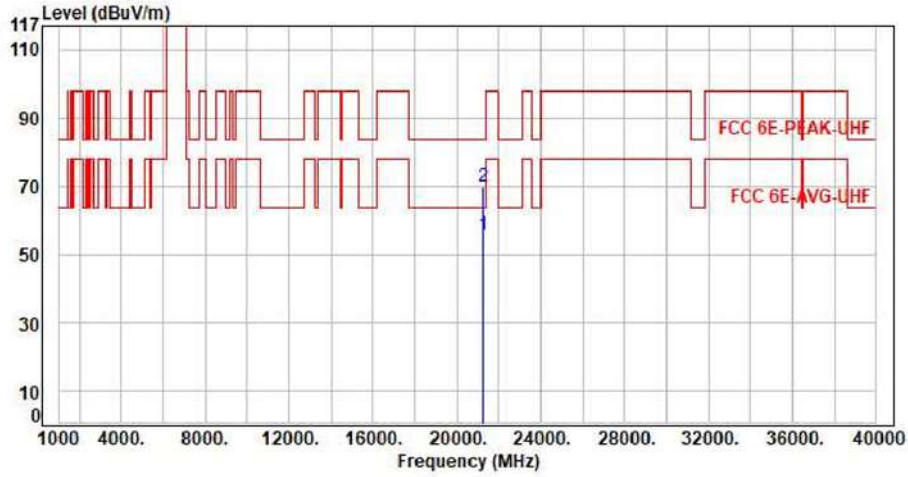


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	43.72	55.56	63.54	-7.98	Average	150	360	P
2	21255.00	11.84	58.07	69.91	83.54	-13.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

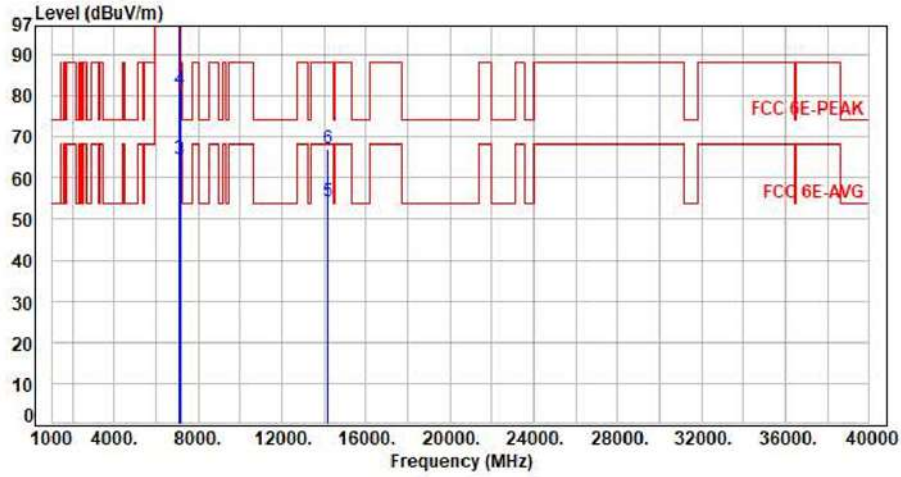


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	10.95	99.33	110.28	200.00	-89.72	Average	252	69	P
2	7085.00	10.95	112.30	123.25	200.00	-76.75	Peak	252	69	P
3	7125.00	11.08	53.38	64.46	68.20	-3.74	Average	252	69	P
4	7125.00	11.08	70.48	81.56	88.20	-6.64	Peak	252	69	P
5	14170.00	23.03	31.10	54.13	68.20	-14.07	Average	100	221	P
6	14170.00	23.03	43.94	66.97	88.20	-21.23	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

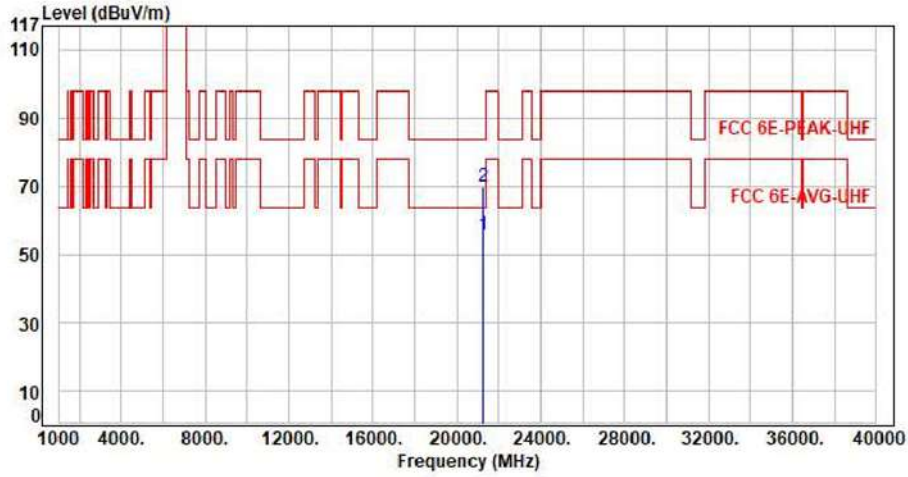


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	43.59	55.43	63.54	-8.11	Average	150	360	P
2	21255.00	11.84	57.79	69.63	83.54	-13.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

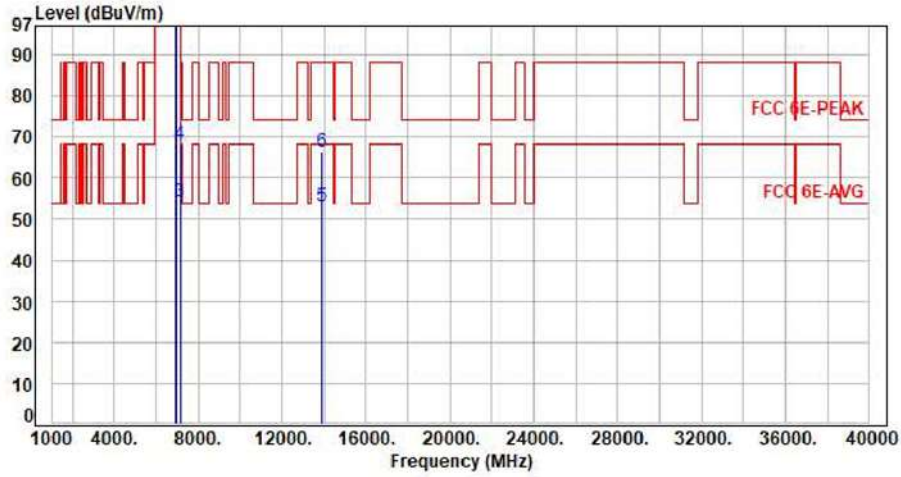


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	91.74	101.31	200.00	-98.69	Average	212	12	P
2	6945.00	9.57	105.34	114.91	200.00	-85.09	Peak	212	12	P
3	7125.00	11.08	42.98	54.06	68.20	-14.14	Average	212	12	P
4	7125.00	11.08	57.06	68.14	88.20	-20.06	Peak	212	12	P
5	13890.00	22.18	30.97	53.15	68.20	-15.05	Average	100	128	P
6	13890.00	22.18	44.23	66.41	88.20	-21.79	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

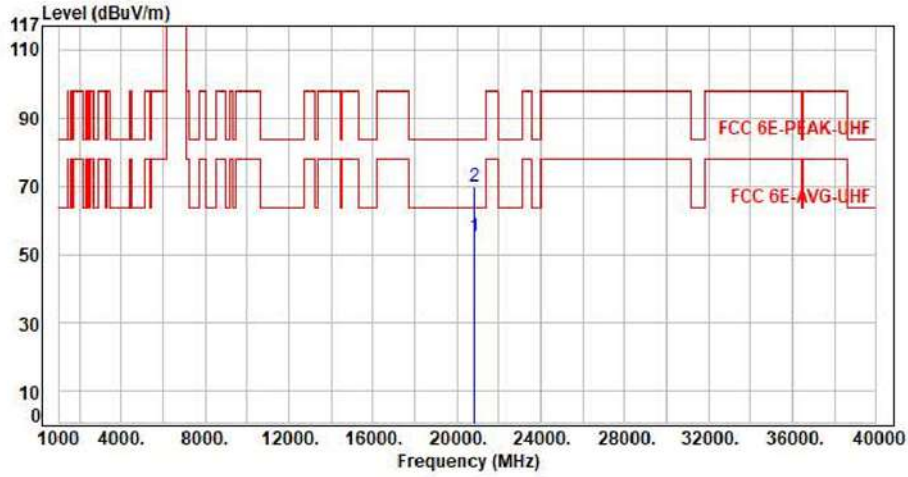


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	43.59	54.99	63.54	-8.55	Average	150	360	P
2	20835.00	11.40	58.34	69.74	83.54	-13.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

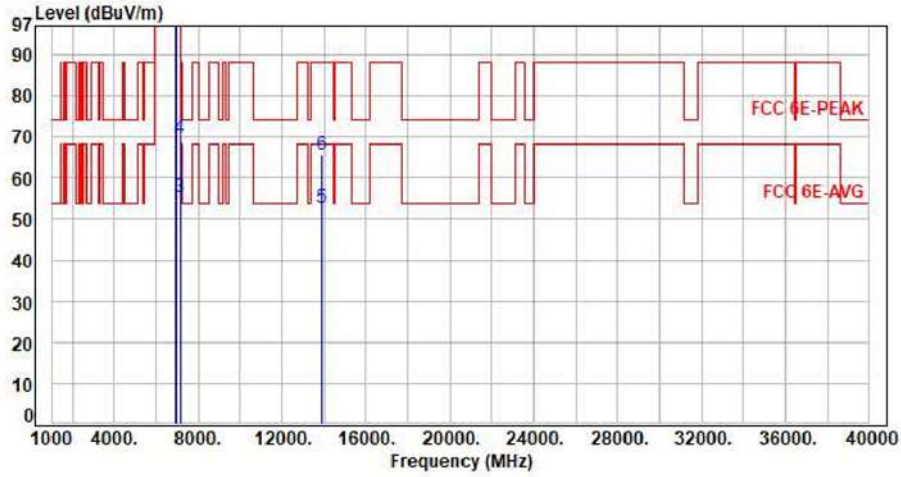


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.57	95.38	104.95	200.00	-95.05	Average	255	73	P
2	6945.00	9.57	107.31	116.88	200.00	-83.12	Peak	255	73	P
3	7125.00	11.08	44.35	55.43	68.20	-12.77	Average	255	73	P
4	7125.00	11.08	58.49	69.57	88.20	-18.63	Peak	255	73	P
5	13890.00	22.18	30.68	52.86	68.20	-15.34	Average	100	224	P
6	13890.00	22.18	43.53	65.71	88.20	-22.49	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

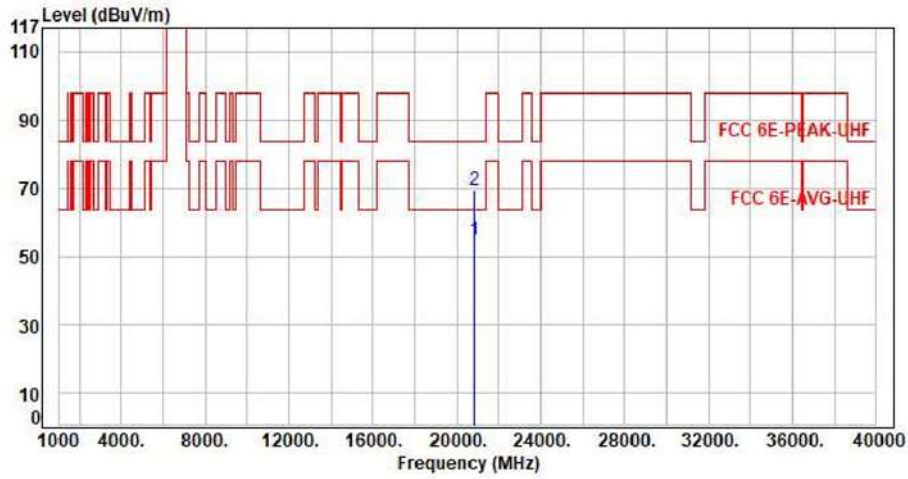


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	43.26	54.66	63.54	-8.88	Average	150	360	P
2	20835.00	11.40	57.80	69.20	83.54	-14.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

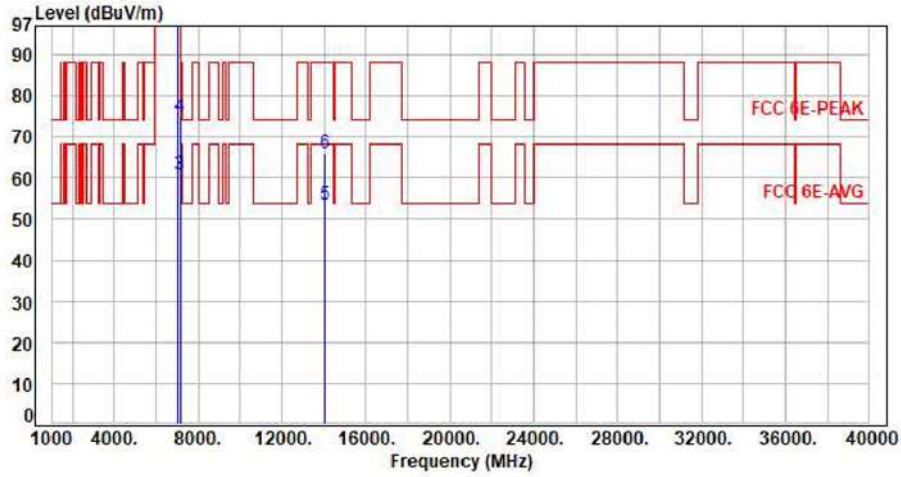


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	10.85	94.59	105.44	200.00	-94.56	Average	221	12	P
2	7025.00	10.85	106.45	117.30	200.00	-82.70	Peak	221	12	P
3	7125.00	11.08	49.83	60.91	68.20	-7.29	Average	221	12	P
4	7125.00	11.08	63.67	74.75	88.20	-13.45	Peak	221	12	P
5	14050.00	22.72	30.83	53.55	68.20	-14.65	Average	100	126	P
6	14050.00	22.72	43.27	65.99	88.20	-22.21	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

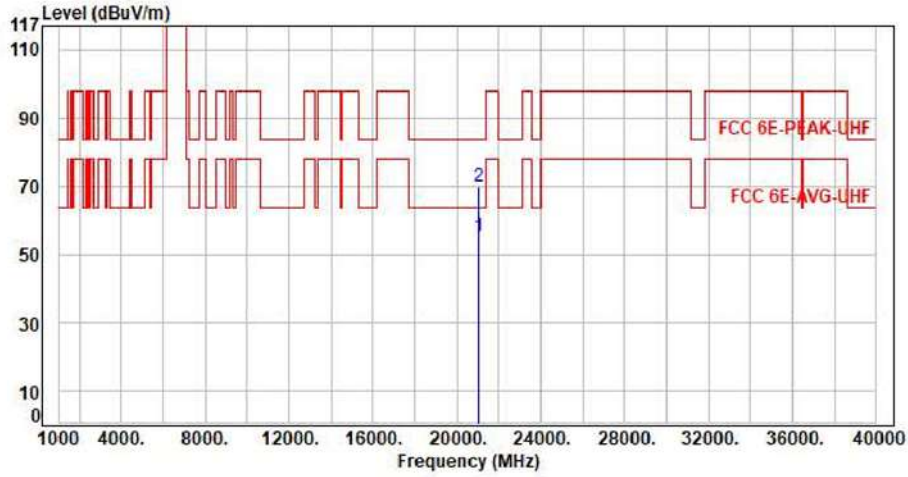


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	43.69	55.21	63.54	-8.33	Average	150	360	P
2	21075.00	11.52	58.14	69.66	83.54	-13.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

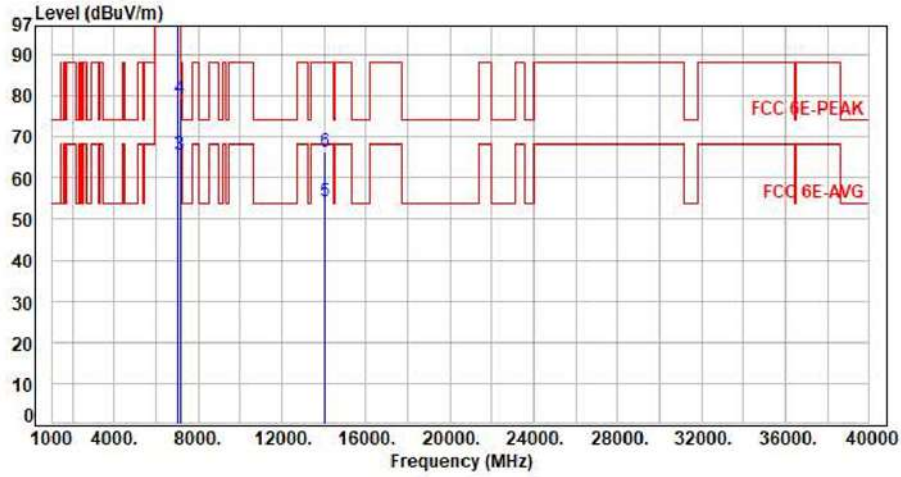


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	10.85	98.65	109.50	200.00	-90.50	Average	262	65	P
2	7025.00	10.85	111.61	122.46	200.00	-77.54	Peak	262	65	P
3	7125.00	11.08	54.56	65.64	68.20	-2.56	Average	262	65	P
4	7125.00	11.08	68.29	79.37	88.20	-8.83	Peak	262	65	P
5	14050.00	22.72	31.50	54.22	68.20	-13.98	Average	100	218	P
6	14050.00	22.72	43.66	66.38	88.20	-21.82	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

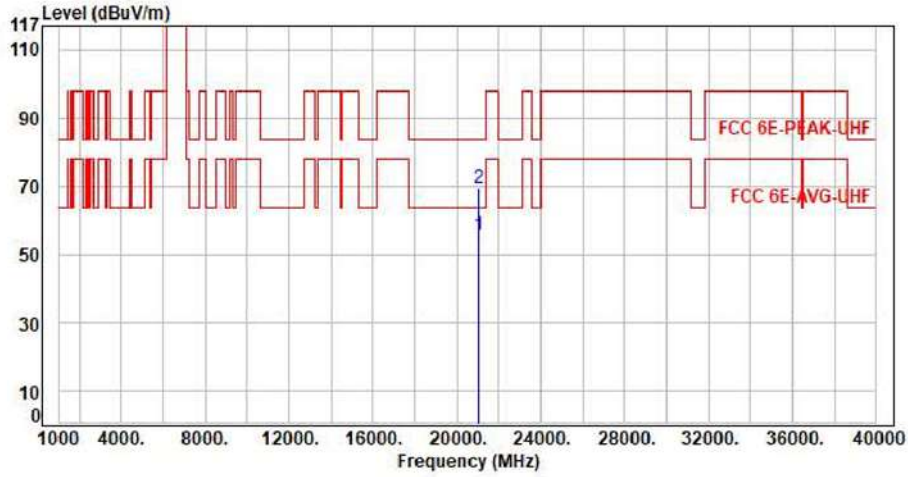


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	43.87	55.39	63.54	-8.15	Average	150	360	P
2	21075.00	11.52	57.66	69.18	83.54	-14.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

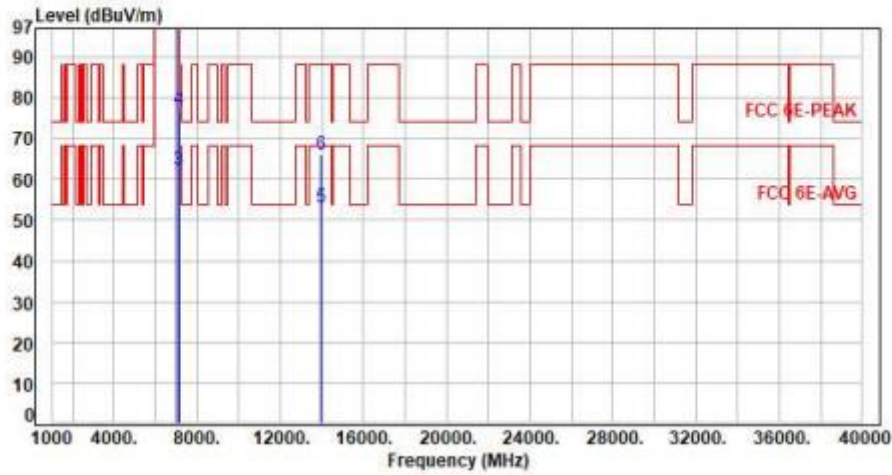


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	89.11	98.69	200.00	-101.31	Average	241	13	P
2	6985.00	9.58	99.56	109.14	200.00	-90.86	Peak	241	13	P
3	7125.00	11.08	51.15	62.23	68.20	-5.97	Average	241	13	P
4	7125.00	11.08	66.02	77.10	88.20	-11.10	Peak	241	13	P
5	13970.00	22.42	30.55	52.97	68.20	-15.23	Average	100	121	P
6	13970.00	22.42	43.45	65.87	88.20	-22.33	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

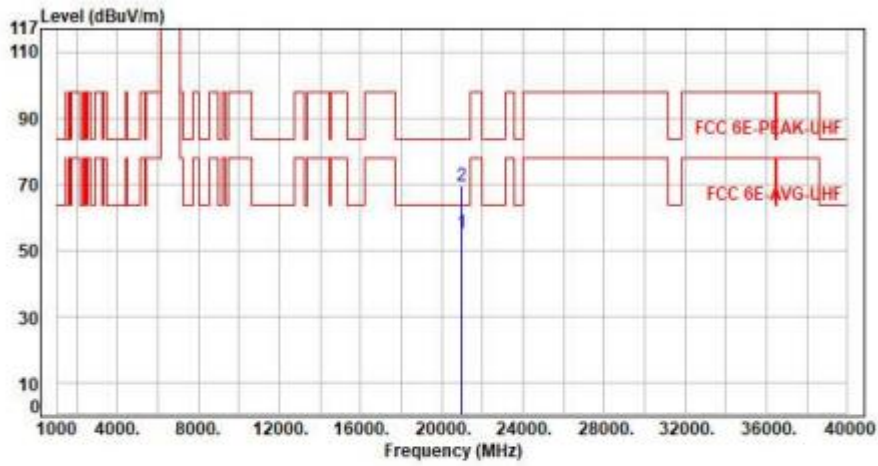


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	43.47	54.95	63.54	-8.59	Average	150	360	P
2	20955.00	11.48	58.11	69.59	83.54	-13.95	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

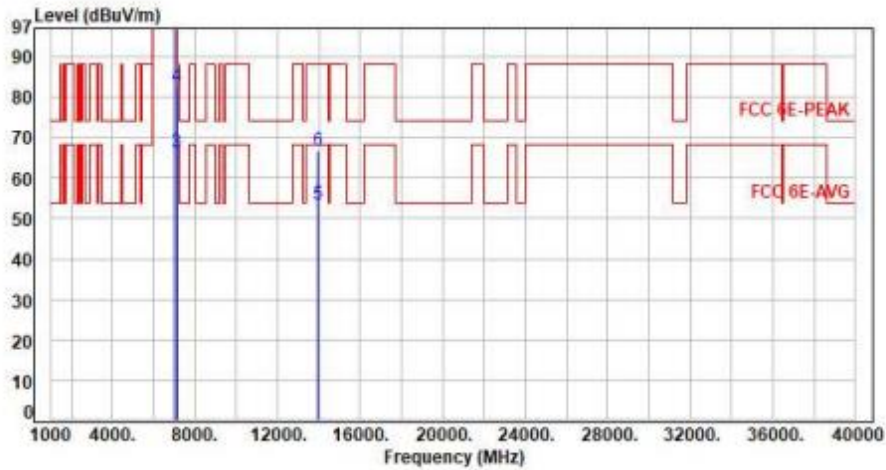


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.58	92.55	102.13	200.00	-97.87	Average	254	67	P
2	6985.00	9.58	104.80	114.38	200.00	-85.62	Peak	254	67	P
3	7125.00	11.08	55.38	66.46	68.20	-1.74	Average	254	67	P
4	7125.00	11.08	71.43	82.51	88.20	-5.69	Peak	254	67	P
5	13970.00	22.42	31.16	53.58	68.20	-14.62	Average	100	221	P
6	13970.00	22.42	44.49	66.91	88.20	-21.29	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

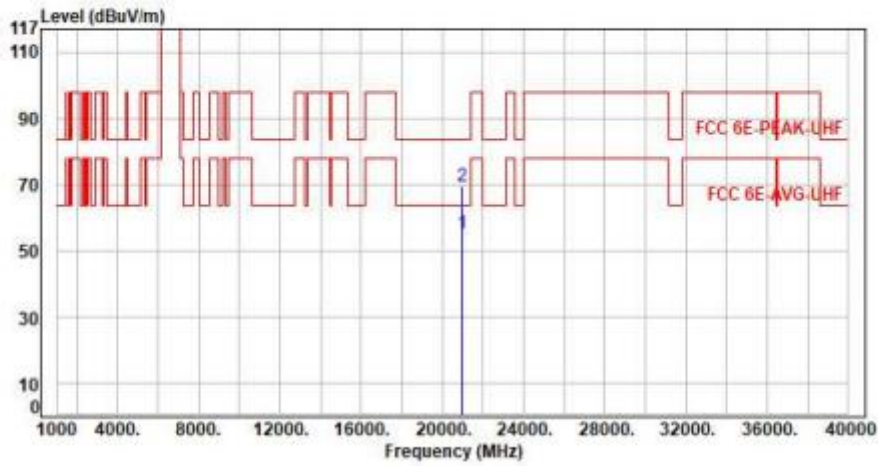


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	43.55	55.03	63.54	-8.51	Average	150	360	P
2	20955.00	11.48	57.76	69.24	83.54	-14.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

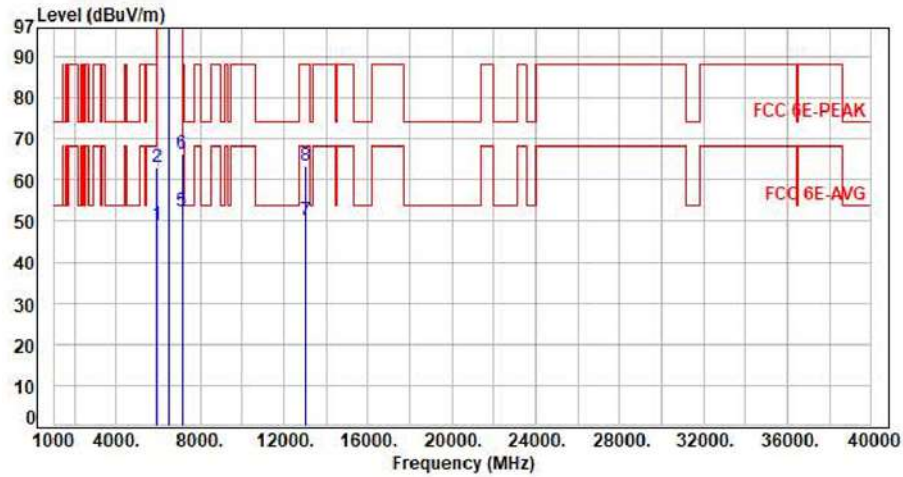


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.43	49.16	68.20	-19.04	Average	157	7	P
2	5925.00	7.73	55.38	63.11	88.20	-25.09	Peak	157	7	P
3	6525.00	8.52	97.30	105.82	200.00	-94.18	Average	157	7	P
4	6525.00	8.52	109.66	118.18	200.00	-81.82	Peak	157	7	P
5	7125.00	11.08	41.36	52.44	68.20	-15.76	Average	157	7	P
6	7125.00	11.08	55.25	66.33	88.20	-21.87	Peak	157	7	P
7	13050.00	19.14	30.93	50.07	68.20	-18.13	Average	100	121	P
8	13050.00	19.14	44.22	63.36	88.20	-24.84	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

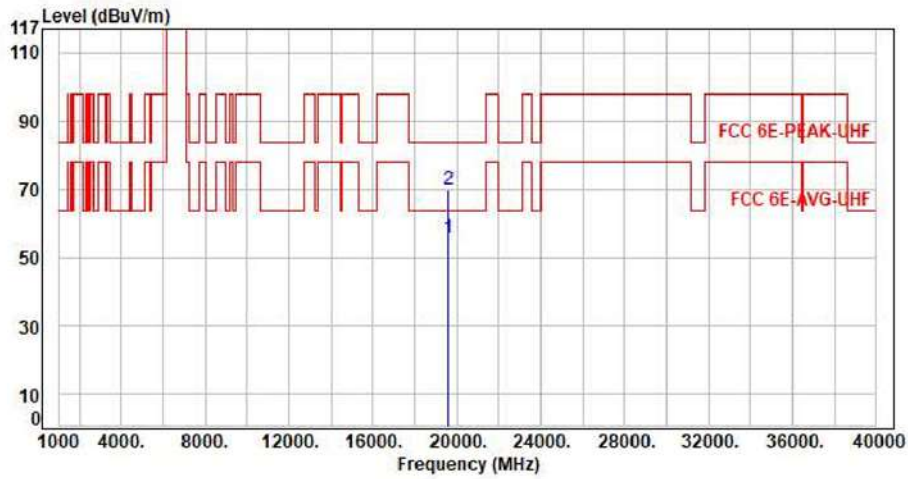


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	43.58	55.60	63.54	-7.94	Average	150	360	P
2	19575.00	12.02	57.65	69.67	83.54	-13.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

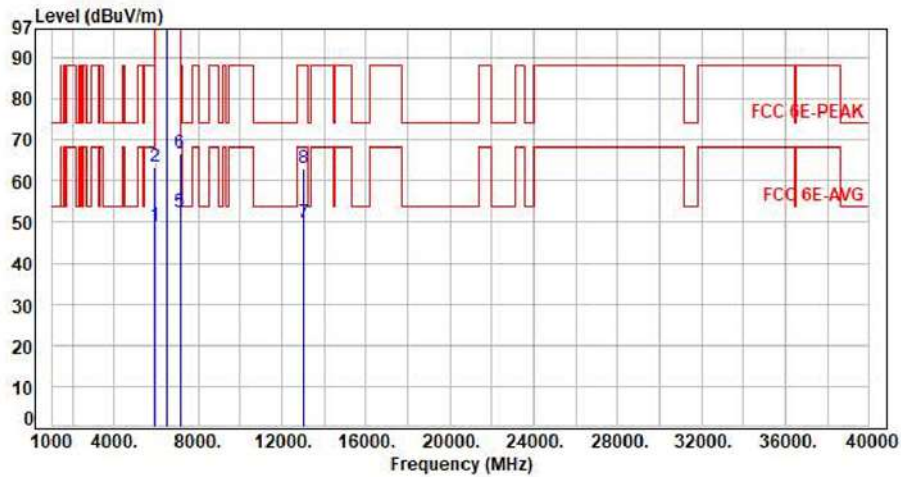


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.43	49.16	68.20	-19.04	Average	247	73	P
2	5925.00	7.73	55.82	63.55	88.20	-24.65	Peak	247	73	P
3	6525.00	8.52	100.43	108.95	200.00	-91.05	Average	247	73	P
4	6525.00	8.52	113.07	121.59	200.00	-78.41	Peak	247	73	P
5	7125.00	11.08	41.25	52.33	68.20	-15.87	Average	247	73	P
6	7125.00	11.08	55.57	66.65	88.20	-21.55	Peak	247	73	P
7	13050.00	19.14	30.60	49.74	68.20	-18.46	Average	100	220	P
8	13050.00	19.14	43.78	62.92	88.20	-25.28	Peak	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

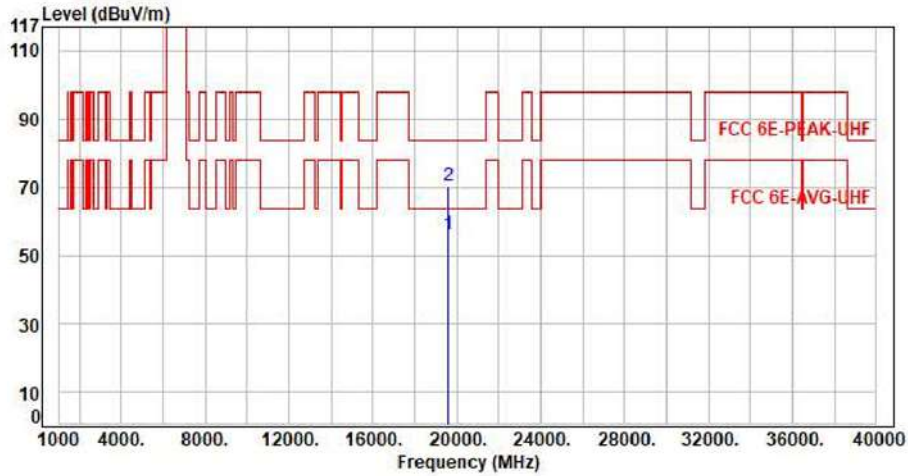


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	43.89	55.91	63.54	-7.63	Average	150	360	P
2	19575.00	12.02	58.14	70.16	83.54	-13.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

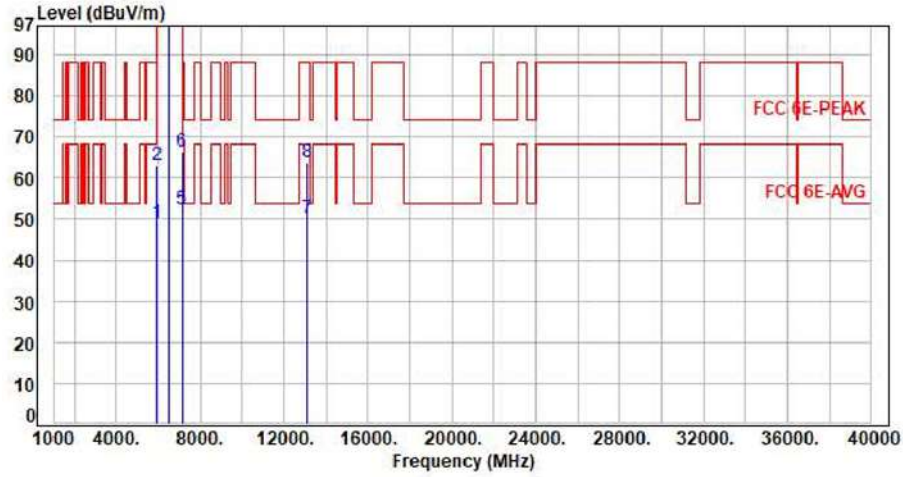


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.44	49.17	68.20	-19.03	Average	157	4	P
2	5925.00	7.73	55.24	62.97	88.20	-25.23	Peak	157	4	P
3	6545.00	8.63	94.25	102.88	200.00	-97.12	Average	157	4	P
4	6545.00	8.63	106.32	114.95	200.00	-85.05	Peak	157	4	P
5	7125.00	11.08	41.35	52.43	68.20	-15.77	Average	157	4	P
6	7125.00	11.08	55.42	66.50	88.20	-21.70	Peak	157	4	P
7	13090.00	19.39	30.95	50.34	68.20	-17.86	Average	100	125	P
8	13090.00	19.39	44.23	63.62	88.20	-24.58	Peak	100	125	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

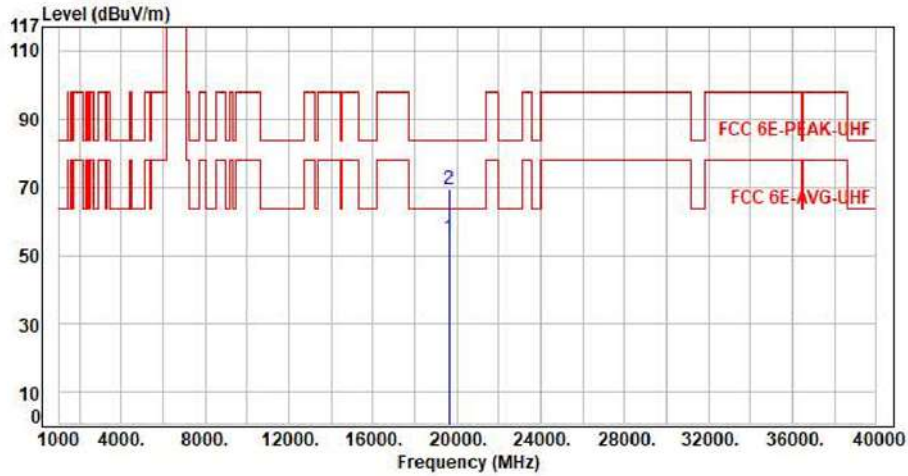


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	43.54	55.12	63.54	-8.42	Average	150	360	P
2	19635.00	11.58	57.97	69.55	83.54	-13.99	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

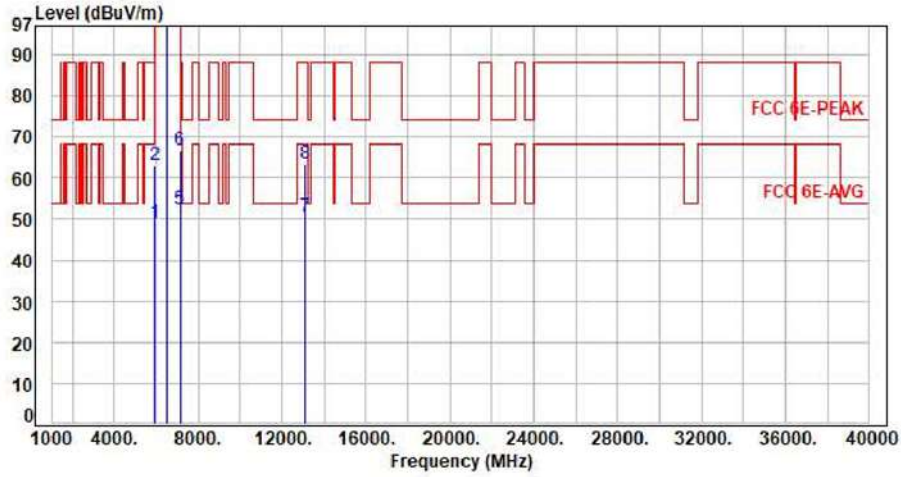


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.42	49.15	68.20	-19.05	Average	259	70	P
2	5925.00	7.73	55.50	63.23	88.20	-24.97	Peak	259	70	P
3	6545.00	8.63	98.03	106.66	200.00	-93.34	Average	259	70	P
4	6545.00	8.63	111.14	119.77	200.00	-80.23	Peak	259	70	P
5	7125.00	11.08	41.34	52.42	68.20	-15.78	Average	259	70	P
6	7125.00	11.08	55.53	66.61	88.20	-21.59	Peak	259	70	P
7	13090.00	19.39	31.09	50.48	68.20	-17.72	Average	100	222	P
8	13090.00	19.39	44.01	63.40	88.20	-24.80	Peak	100	222	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

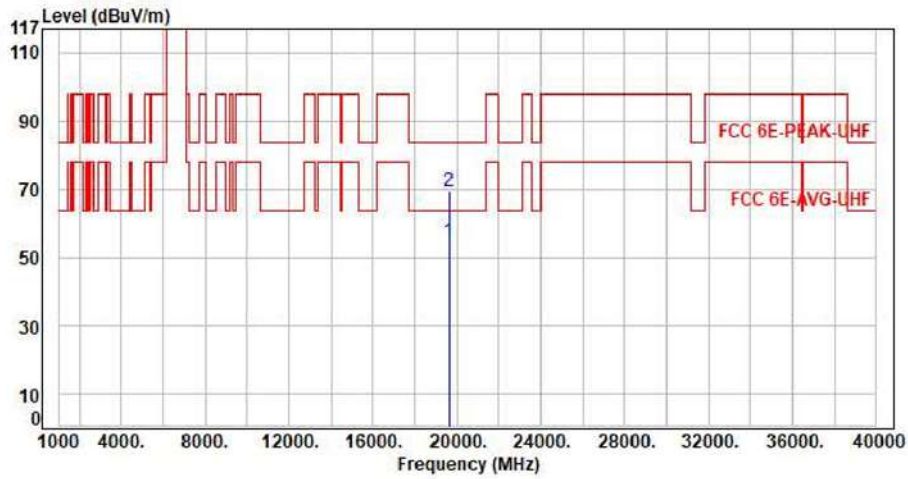


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	43.31	54.89	63.54	-8.65	Average	150	360	P
2	19635.00	11.58	57.66	69.24	83.54	-14.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Vertical

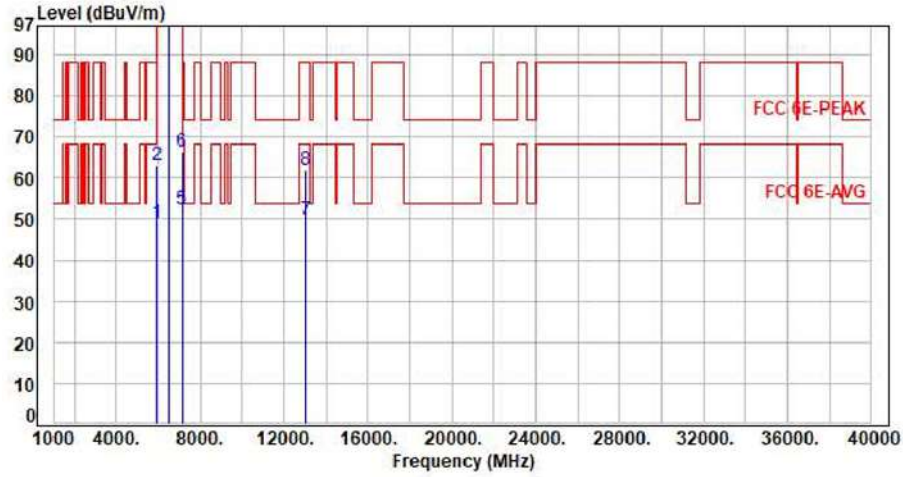


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.44	49.17	68.20	-19.03	Average	167	8	P
2	5925.00	7.73	55.17	62.90	88.20	-25.30	Peak	167	8	P
3	6505.00	8.39	92.41	100.80	200.00	-99.20	Average	167	8	P
4	6505.00	8.39	104.33	112.72	200.00	-87.28	Peak	167	8	P
5	7125.00	11.08	41.35	52.43	68.20	-15.77	Average	167	8	P
6	7125.00	11.08	55.37	66.45	88.20	-21.75	Peak	167	8	P
7	13010.00	18.98	30.68	49.66	68.20	-18.54	Average	100	125	P
8	13010.00	18.98	42.94	61.92	88.20	-26.28	Peak	100	125	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

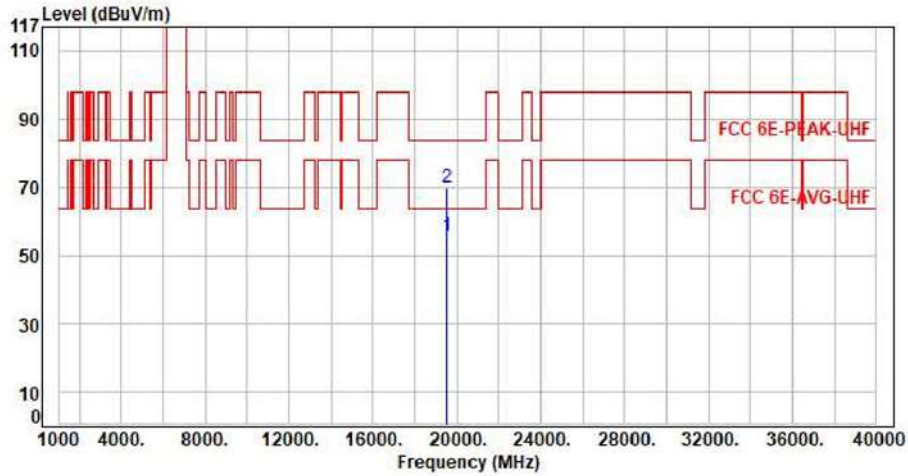


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	43.79	55.70	63.54	-7.84	Average	150	360	P
2	19515.00	11.91	58.00	69.91	83.54	-13.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

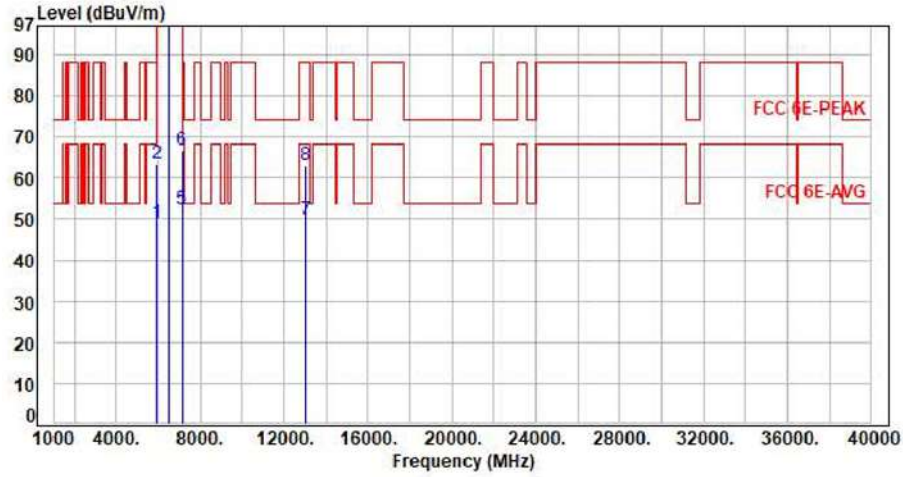


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.41	49.14	68.20	-19.06	Average	267	68	P
2	5925.00	7.73	55.66	63.39	88.20	-24.81	Peak	267	68	P
3	6505.00	8.39	96.01	104.40	200.00	-95.60	Average	267	68	P
4	6505.00	8.39	107.69	116.08	200.00	-83.92	Peak	267	68	P
5	7125.00	11.08	41.37	52.45	68.20	-15.75	Average	267	68	P
6	7125.00	11.08	55.77	66.85	88.20	-21.35	Peak	267	68	P
7	13010.00	18.98	30.69	49.67	68.20	-18.53	Average	100	216	P
8	13010.00	18.98	44.21	63.19	88.20	-25.01	Peak	100	216	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

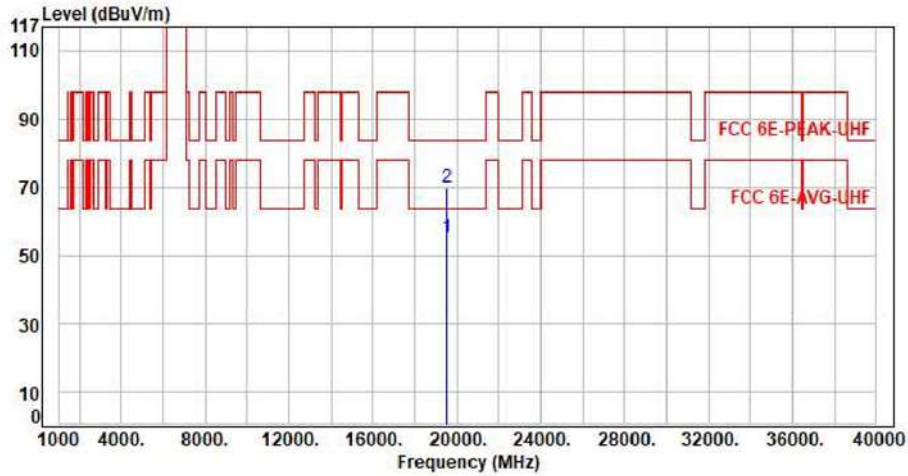


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	43.35	55.26	63.54	-8.28	Average	150	360	P
2	19515.00	11.91	57.80	69.71	83.54	-13.83	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

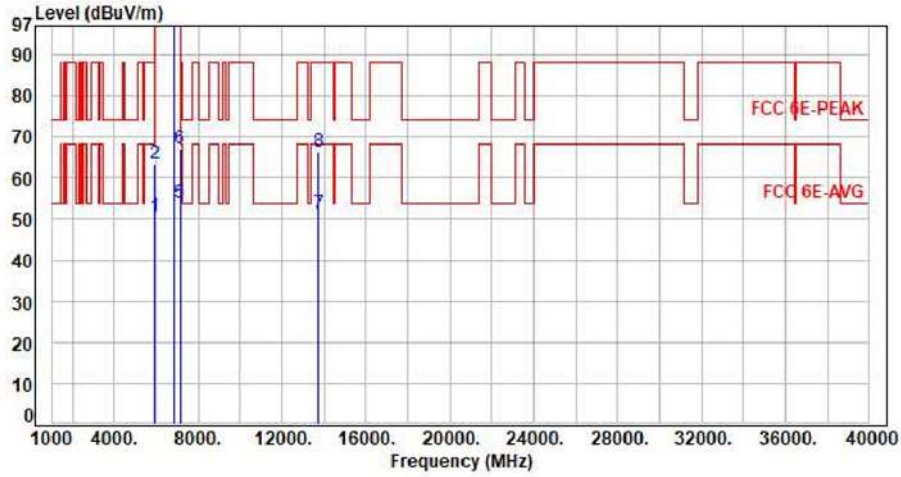


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.92	50.65	68.20	-17.55	Average	361	357	P
2	5925.00	7.73	55.60	63.33	88.20	-24.87	Peak	361	357	P
3	6875.00	9.47	95.10	104.57	200.00	-95.43	Average	361	357	P
4	6875.00	9.47	104.68	114.15	200.00	-85.85	Peak	361	357	P
5	7125.00	11.08	42.81	53.89	68.20	-14.31	Average	361	357	P
6	7125.00	11.08	56.21	67.29	88.20	-20.91	Peak	361	357	P
7	13750.00	21.81	29.51	51.32	68.20	-16.88	Average	100	251	P
8	13750.00	21.81	44.51	66.32	88.20	-21.88	Peak	100	251	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

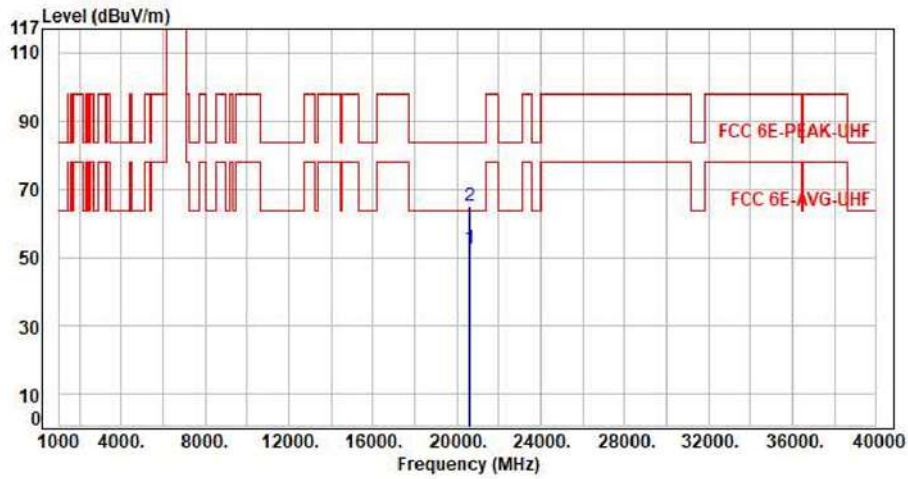


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	41.33	52.47	63.54	-11.07	Average	150	360	P
2	20625.00	11.14	53.69	64.83	83.54	-18.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

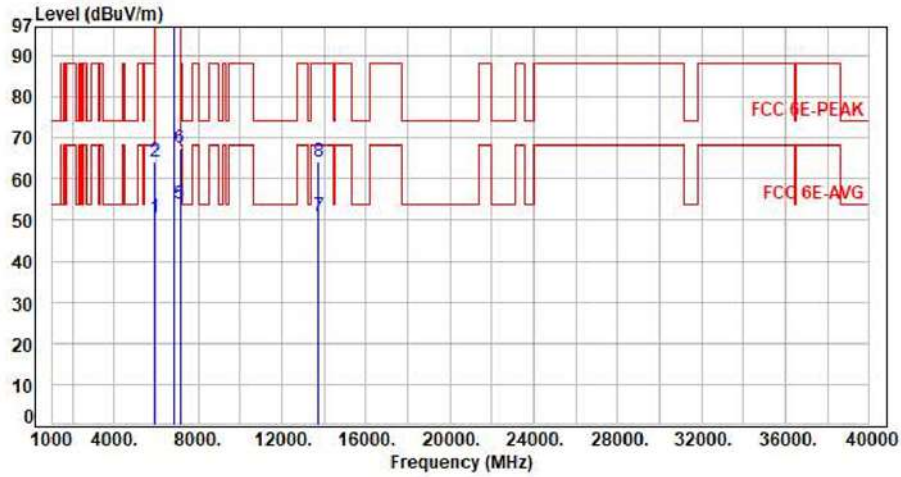


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.96	50.69	68.20	-17.51	Average	257	70	P
2	5925.00	7.73	56.62	64.35	88.20	-23.85	Peak	257	70	P
3	6875.00	9.47	98.60	108.07	200.00	-91.93	Average	257	70	P
4	6875.00	9.47	108.39	117.86	200.00	-82.14	Peak	257	70	P
5	7125.00	11.08	42.85	53.93	68.20	-14.27	Average	257	70	P
6	7125.00	11.08	56.35	67.43	88.20	-20.77	Peak	257	70	P
7	13750.00	21.81	29.14	50.95	68.20	-17.25	Average	100	144	P
8	13750.00	21.81	42.50	64.31	88.20	-23.89	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

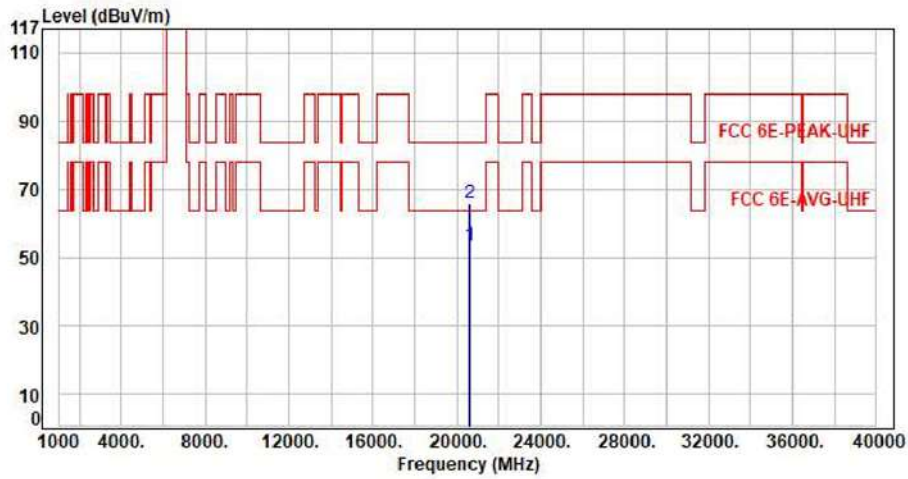


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	42.22	53.36	63.54	-10.18	Average	150	360	P
2	20625.00	11.14	54.70	65.84	83.54	-17.70	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

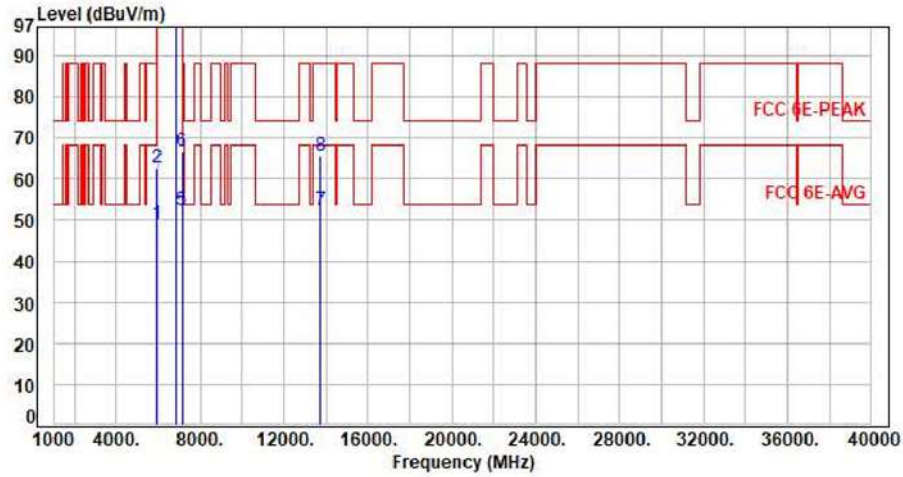


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.43	49.16	68.20	-19.04	Average	101	15	P
2	5925.00	7.73	55.14	62.87	88.20	-25.33	Peak	101	15	P
3	6875.00	9.47	95.43	104.90	200.00	-95.10	Average	101	15	P
4	6875.00	9.47	108.39	117.86	200.00	-82.14	Peak	101	15	P
5	7125.00	11.08	41.38	52.46	68.20	-15.74	Average	101	15	P
6	7125.00	11.08	55.81	66.89	88.20	-21.31	Peak	101	15	P
7	13750.00	21.81	30.58	52.39	68.20	-15.81	Average	100	123	P
8	13750.00	21.81	43.75	65.56	88.20	-22.64	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

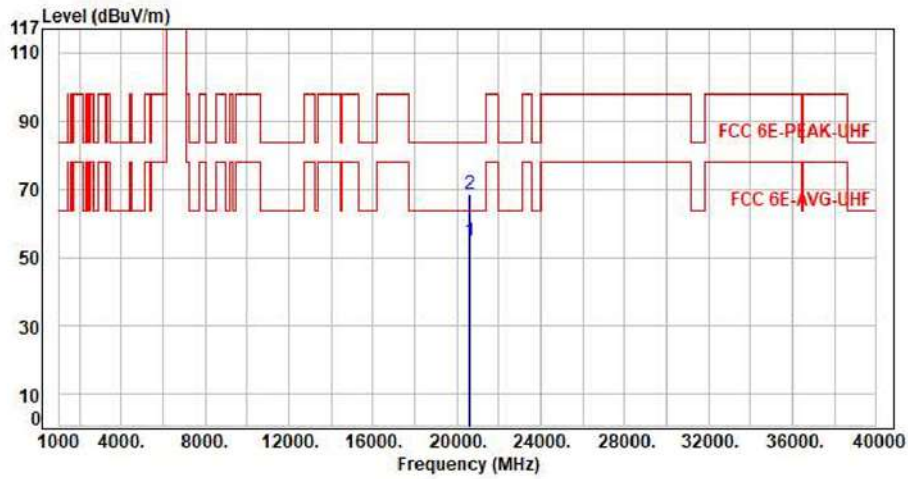


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	43.72	54.86	63.54	-8.68	Average	150	360	P
2	20625.00	11.14	57.48	68.62	83.54	-14.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

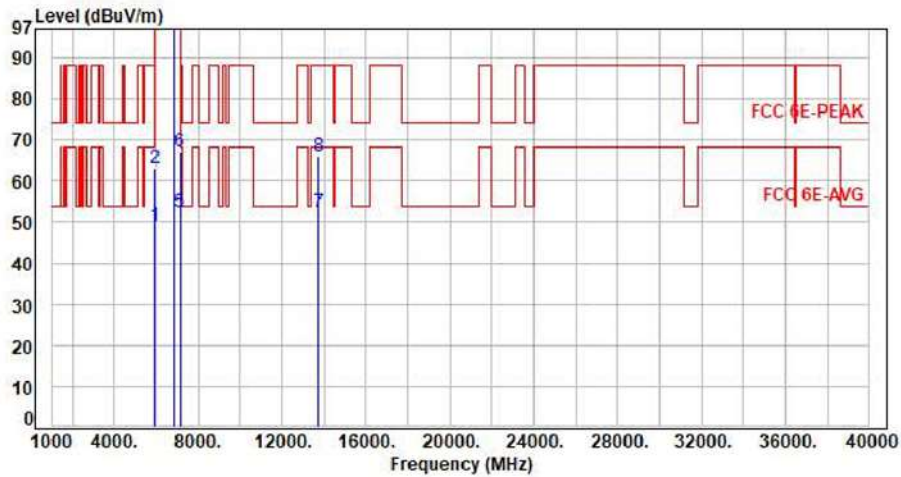


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.42	49.15	68.20	-19.05	Average	248	77	P
2	5925.00	7.73	55.52	63.25	88.20	-24.95	Peak	248	77	P
3	6875.00	9.47	99.95	109.42	200.00	-90.58	Average	248	77	P
4	6875.00	9.47	113.34	122.81	200.00	-77.19	Peak	248	77	P
5	7125.00	11.08	41.35	52.43	68.20	-15.77	Average	248	77	P
6	7125.00	11.08	56.12	67.20	88.20	-21.00	Peak	248	77	P
7	13750.00	21.81	30.58	52.39	68.20	-15.81	Average	100	217	P
8	13750.00	21.81	44.26	66.07	88.20	-22.13	Peak	100	217	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

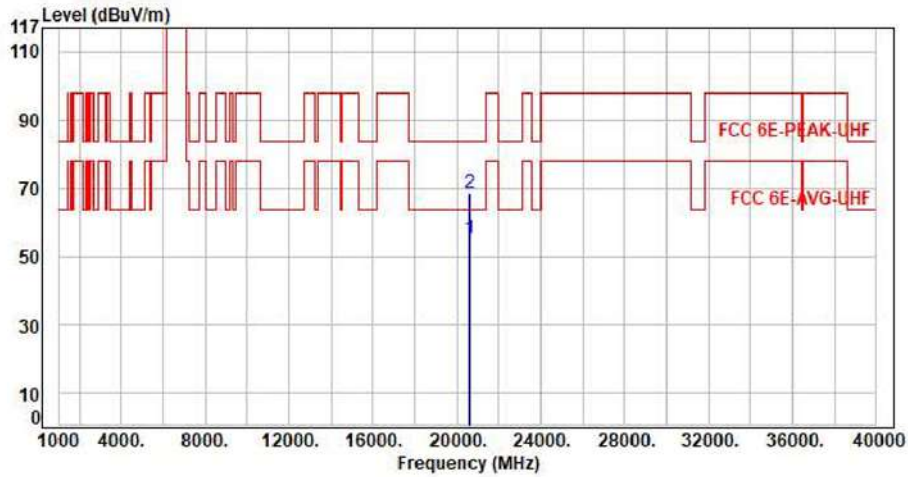

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	43.98	55.12	63.54	-8.42	Average	150	360	P
2	20625.00	11.14	57.40	68.54	83.54	-15.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor