









Label & Location

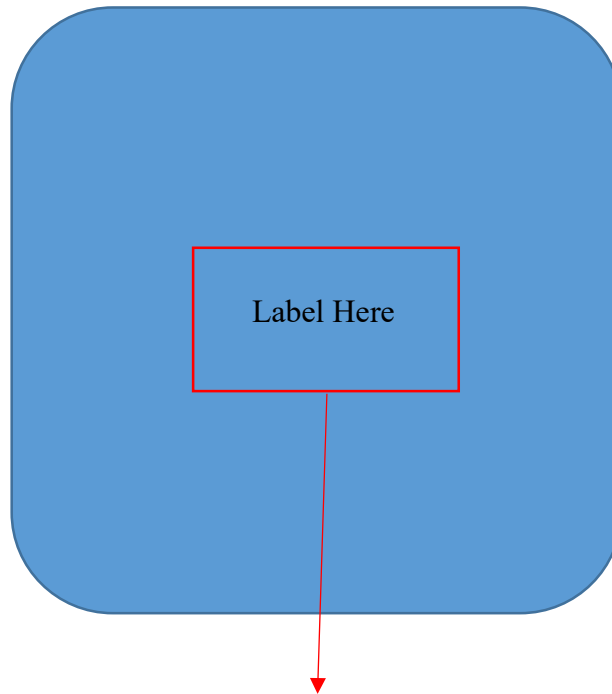

Bottom of EUT






D-Link® DBA-X5480P

2.4DS/0F4
Using 5.2/5.3GHz range in outdoor
in Japan is forbidden by Radio law.
Indoor Use only



      

 201-240279
 D24-0071001
L24-0011

  ERAC000113

Polarity:

Input: 12V \equiv 2.5A (Adapter) or
42.5-57V \equiv 0.6A (PoE)

Complies with
IMDA Standards
DB100549

 CIDF15000447 

FCC ID: KA2APX5480A1

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

D-Link (Deutschland) GmbH,
Schwalbacher Strasse 74, 65760 Eschborn, Germany

D-Link (Europe) Ltd.
Artemis Building, Odyssey Business Park, West End Road,
South Ruislip HA4 6QE, United Kingdom

D-Link Corporation,
No.289,Xinhu 3rd Road, Neihu District, Taipei 11494, Taiwan
<https://www.dlink.com/en/contact-d-link>

Made in Taiwan 台灣製造