



# FCC RADIO TEST REPORT

Applicant : D-Link Corporation

---

Address : No. 289, Sinhu 3rd Rd., Neihu District,  
: Taipei City 114, Taiwan

---

Tel : 886-2-66000123

---

Fax : 886-2-55509988

---

Equipment : Business Cloud Access Point

---

Model No. : DBA-1510P

---

Trade Name : D-Link

---

FCC ID : KA2BA1510PA1

---


## I HEREBY CERTIFY THAT :

The sample was received on Dec. 01, 2016 and the testing was carried out on Jan. 12, 2017 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

  
Ray Chou / Assistant Manager

Tested by:

  
Dian Chen / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## CONTENTS

1.	Summary of Test Procedure and Test Results .....	5
1.1.	Applicable Standards .....	5
2.	Test Configuration of Equipment under Test .....	6
2.1.	Feature of Equipment under Test.....	6
2.2.	Description of Main Source and Second Source .....	6
2.3.	Carrier Frequency of Channels .....	7
2.4.	Test Mode and Test Software .....	7
2.5.	Description of Test System.....	8
2.6.	General Information of Test.....	9
2.7.	Measurement Uncertainty .....	9
3.	Test Equipment and Ancillaries Used for Tests .....	10
4.	Antenna Requirements .....	11
4.1.	Standard Applicable .....	11
4.2.	Antenna Construction and Directional Gain.....	11
5.	Test of AC Power Line Conducted Emission .....	12
5.1.	Test Limit .....	12
5.2.	Test Procedures .....	12
5.3.	Typical Test Setup .....	13
5.4.	Test Result and Data .....	14
5.5.	Test Photographs .....	22
6.	Test of Spurious Emission (Radiated) .....	23
6.1.	Test Limit .....	23
6.2.	Test Procedures .....	23
6.3.	Typical Test Setup .....	24
6.4.	Test Result and Data (9kHz ~ 30MHz).....	25
6.5.	Test Result and Data (30MHz ~ 1GHz).....	25
6.6.	Test Result and Data (1GHz ~ 40GHz).....	41
6.7.	Restricted Bands of Operation .....	77
6.8.	Test Photographs (30MHz ~ 1GHz) .....	78
6.9.	Test Photographs (1GHz ~ 40GHz) .....	80
7.	On Time, Duty Cycle and Measurement methods .....	81
7.1.	Test Limit .....	81
7.2.	Test Procedure .....	81
7.3.	Test Setup Layout .....	81
7.4.	Test Result and Data .....	81
7.5.	Measurement Methods .....	81
8.	6dB Bandwidth .....	82
8.1.	Test Limit .....	82
8.2.	Test Procedure .....	82
8.3.	Test Setup Layout .....	82
8.4.	Test Result and Data .....	82
9.	26dB Bandwidth .....	89



- 9.1. Test Limit ..... 89
- 9.2. Test Procedure ..... 89
- 9.3. Test Setup Layout ..... 89
- 9.4. Test Result and Data ..... 89
- 10. Average Power..... 96
  - 10.1. Test Limit ..... 96
  - 10.2. Test Procedure ..... 96
  - 10.3. Test Setup Layout ..... 96
  - 10.4. Test Result and Data ..... 96
- 11. Output Power and PPSD ..... 98
  - 11.1. Test Limit ..... 98
  - 11.2. Test Procedure ..... 100
  - 11.3. Test Setup Layout ..... 100
  - 11.4. Test Result and Data ..... 101
- 12. Frequency Stability ..... 114
  - 12.1. Test Procedure ..... 114
  - 12.2. Test Setup Layout ..... 114
  - 12.3. Test Result and Data ..... 115
- 13. Automatically Discontinue Transmission ..... 116
  - 13.1. Limit of Automatically Discontinue Transmission ..... 116
  - 13.2. Test Result of Automatically Discontinue Transmission ..... 116



### History of this test report

Report No.	Issue Date	Description
TEFE1610044	Jan. 17, 2017	Original



# 1. Summary of Test Procedure and Test Results

## 1.1. Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart E §15.407

First R&O 14-30

KDB662911

KDB789033

KDB644545

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207(a)	. AC Power Line Conducted Emission	Pass
15.407(b) 15.209	. Radiated Spurious Emission	Pass
15.407(a)	. 26 dB Occupied Bandwidth	Pass
15.407	. 6 dB Bandwidth	Pass
15.407 (a) & (a)(3)	. Average Power	Pass
15.407(a)	. Output and PPSD	Pass



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

Equipment	Business Cloud Access Point
Model No.	DBA-1510P
Brand Name	D-Link
Modulation Type	DSSS, OFDM
Frequency Range	802.11b/g/n: 2412-2462MHz 802.11a/an/ac: 5150-5250MHz, 5725-5850MHz
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: 6.5Mbps to 450Mbps (MCS0 – MCS23, HT20/40) 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: 13Mbps to 1300Mbps (MCS0 – MCS9, VHT 20/40/80)
Antenna Type	802.11b/g/n: PIFA Antenna 802.11a/an/ac: Dipole Antenna
Antenna Gain	802.11b/g/n: Antenna 1: 3.0 dBi Antenna 2: 3.0 dBi Antenna 3: 3.0 dBi 802.11a/an/ac: Antenna 1: 5.0 dBi Antenna 2: 5.0 dBi Antenna 3: 5.0 dBi
Product Description	Please refer to User's Manual.
AC ADAPTER	Adapter Brand: D-Link Model No.: AMS115-1202000FU I/P: AC 100-240V~, 50/60Hz, 0.8A ; O/P: DC 12V, 2.0A
Connecting I/O Port(s)	Please refer to User's Manual.
Memo	A1

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 2.2. Description of Main Source and Second Source

Component Position	Main Source	Second Source
C857,C859	√	x
T13	√	x
R922	√	x
D36,D37	√	x
R915	√	x
Q8	√	x
R906,R908	0Ω	100Ω
C844	39pF	330pF
R918	0KΩ	10KΩ
Q5	N-Channel Shielded Gate Power Trench	DIODE



### 2.3. Carrier Frequency of Channels

Band: 5150MHz-5250MHz

802.11a, 802.11an HT 20, 802.11ac VHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*36</b>	<b>5180</b>	<b>*44</b>	<b>5220</b>
40	5200	<b>*48</b>	<b>5240</b>

802.11an HT 40, 802.11ac VHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*38</b>	<b>5190</b>	<b>*46</b>	<b>5230</b>

802.11ac VHT80

Channel	Frequency(MHz)
<b>*42</b>	<b>5210</b>

Band: 5725MHz -5850MHz

802.11a, 802.11an HT20, 802.11ac VHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*149</b>	<b>5745</b>	161	5805
153	5765	<b>*165</b>	<b>5825</b>
<b>*157</b>	<b>5785</b>		

802.11an HT 40, 802.11ac VHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*151</b>	<b>5755</b>	<b>*159</b>	<b>5795</b>

802.11ac VHT80

Channel	Frequency(MHz)
<b>*155</b>	<b>5775</b>

Note: Channels remarked \* are selected to perform test.

### 2.4. Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, "Art2 Ver 4.9.575.5" under WIN 7 was executed to transmit and receive data via WLAN.
- d. The following conducted test modes were performed for the test:
  - Test Mode 1. Main Source, Power by Adapter, 802.11a (6Mbps)
  - Test Mode 2. Main Source, Power by Adapter, 802.11an HT20 (6.5Mbps)
  - Test Mode 3. Main Source, Power by Adapter, 802.11an HT40 (13.5Mbps)
  - Test Mode 4. Main Source, Power by Adapter, 802.11ac VHT20 (6.5Mbps)
  - Test Mode 5. Main Source, Power by Adapter, 802.11ac VHT40 (13.5Mbps)
  - Test Mode 6. Main Source, Power by Adapter, 802.11ac VHT80 (29.3Mbps)
  - Test Mode 7. Second Source, Power by Adapter, 802.11a (6Mbps)
  - Test Mode 8. Second Source, Power by Adapter, 802.11an HT20 (6.5Mbps)
  - Test Mode 9. Second Source, Power by Adapter, 802.11an HT40 (13.5Mbps)
  - Test Mode 10. Second Source, Power by Adapter, 802.11ac VHT20 (6.5Mbps)
  - Test Mode 11. Second Source, Power by Adapter, 802.11ac VHT40 (13.5Mbps)
  - Test Mode 12. Second Source, Power by Adapter, 802.11ac VHT80 (29.3Mbps)

The "Test Mode 1 ~ 7" generated the worst case, these were reported as the final data.



e. The following radiated(below 1GHz) test modes were performed for the test:

- Test Mode 1. Main Source, Power by Adapter, 802.11a (6Mbps)
- Test Mode 2. Main Source, Power by Adapter, 802.11an HT20 (6.5Mbps)
- Test Mode 3. Main Source, Power by Adapter, 802.11an HT40 (13.5Mbps)
- Test Mode 4. Main Source, Power by Adapter, 802.11ac VHT20 (6.5Mbps)
- Test Mode 5. Main Source, Power by Adapter, 802.11ac VHT40 (13.5Mbps)
- Test Mode 6. Main Source, Power by Adapter, 802.11ac VHT80 (29.3Mbps)
- Test Mode 7. Main Source, Power by PoE, 802.11a (6Mbps)
- Test Mode 8. Main Source, Power by PoE, 802.11an HT20 (6.5Mbps)
- Test Mode 9. Main Source, Power by PoE, 802.11an HT40 (13.5Mbps)
- Test Mode 10. Main Source, Power by PoE, 802.11ac VHT20 (6.5Mbps)
- Test Mode 11. Main Source, Power by PoE, 802.11ac VHT40 (13.5Mbps)
- Test Mode 12. Main Source, Power by PoE, 802.11ac VHT80 (29.3Mbps)
- Test Mode 13. Second Source, Power by Adapter, 802.11a (6Mbps)
- Test Mode 14. Second Source, Power by Adapter, 802.11an HT20 (6.5Mbps)
- Test Mode 15. Second Source, Power by Adapter, 802.11an HT40 (13.5Mbps)
- Test Mode 16. Second Source, Power by Adapter, 802.11ac VHT20 (6.5Mbps)
- Test Mode 17. Second Source, Power by Adapter, 802.11ac VHT40 (13.5Mbps)
- Test Mode 18. Second Source, Power by Adapter, 802.11ac VHT80 (29.3Mbps)
- Test Mode 19. Second Source, Power by PoE, 802.11a (6Mbps)
- Test Mode 20. Second Source, Power by PoE, 802.11an HT20 (6.5Mbps)
- Test Mode 21. Second Source, Power by PoE, 802.11an HT40 (13.5Mbps)
- Test Mode 22. Second Source, Power by PoE, 802.11ac VHT20 (6.5Mbps)
- Test Mode 23. Second Source, Power by PoE, 802.11ac VHT40 (13.5Mbps)
- Test Mode 24. Second Source, Power by PoE, 802.11ac VHT80 (29.3Mbps)

The “Test Mode 1、7、13、19” generated the worst case, these were reported as the final data.

f. The following radiated(above 1GHz) test modes were performed for the test:

- Test Mode 1. Main Source, Power by Adapter, 802.11a (6Mbps)
- Test Mode 2. Main Source, Power by Adapter, 802.11an HT20 (6.5Mbps)
- Test Mode 3. Main Source, Power by Adapter, 802.11an HT40 (13.5Mbps)
- Test Mode 4. Main Source, Power by Adapter, 802.11ac VHT20 (6.5Mbps)
- Test Mode 5. Main Source, Power by Adapter, 802.11ac VHT40 (13.5Mbps)
- Test Mode 6. Main Source, Power by Adapter, 802.11ac VHT80 (29.3Mbps)

The “Test Mode 1、4~6” were reported as the final data.

\* Radiated (above 1GHz) use POE adapter didn’t effect test value.

### 2.5. Description of Test System

Device	Manufacturer	Model No.	Description
Notebook	DELL	Vostro 3560	Power Cable, Unshielding, 1.8m

Use Cable:

Cable	Quantity	Description
Network	1	Unshielding, 5.0m
RS232 to COM	1	Unshielding, 1.2m





## 2.6. General Information of Test

Test Site	<b>Cerpass Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, 390316, 228391, 641184
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4218, R-4399 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

## 2.7. Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	Line / Neutral	±2.9076 dB
Radiated Emission	9 kHz ~ 25,000 MHz	Vertical / Horizontal	±0.948 dB
Spurious Emission (Conducted)	-	-	±4.011 dB
Maximum Peak and Average Output Power	-	-	±0.322 dB
Power Spectral Density	-	-	±0.322 dB
Bandwidth	-	-	74.224Hz



### 3. Test Equipment and Ancillaries Used for Tests

Instrument	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100443	2016/03/28	2017/03/27
LISN	Schwarzbeck	NSLK 8127	8127-740	2016/08/30	2017/08/29
LISN	Schwarzbeck	NSLK 8127	8127-516	2016/09/06	2017/09/05
Pulse Limiter	R&S	ESH3-Z2	101934	2016/03/09	2017/03/08
Bilog Antenna	Schwarzbeck	VULB9168	369	2016/03/22	2017/03/21
Active Loop Antenna	EMCO	6507	40855	2016/05/11	2017/05/10
Horn Antenna	EMCO	3115	31601	2016/09/05	2017/09/04
Horn Antenna	EMCO	3116	31970	2016/03/18	2017/03/17
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200207	2016/03/16	2017/03/15
Preamplifier	EM	EM330	60660	2016/03/16	2017/03/15
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2016/09/13	2017/09/12
Preamplifier	Agilent	8449B	3008A01954	2016/03/04	2017/03/03
Preamplifier	MITEQ	AMF-7D-0010 100-30-10P	1860212	2016/03/16	2017/03/15
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2016/11/04	2017/11/03
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2016/03/18	2017/03/17
Spectrum Analyzer	R&S	FSP40	100219	2016/09/01	2017/08/31
Bluetooth Tester	R&S	CBT	101133	2016/03/18	2017/03/17
Attenuator	KEYSIGHT	8491B	MY39250703	2016/03/07	2017/03/06
Rotary Attenuator	Agilent	8494B	MY42154466	2016/03/08	2017/03/07
Rotary Attenuator	Agilent	8495B	MY42146680	2016/03/08	2017/03/07
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2016/09/05	2017/09/04
Series Power Meter	Anritsu	ML2495A	1224005	2016/03/03	2017/03/02
Power Sensor	Anritsu	MA2411B	1207295	2016/03/03	2017/03/02
Cable	HUBER SUHNER	SUCOFLEX 102	28422/2	2016/03/15	2017/03/14
Cable	HUBER SUHNER	SUCOFLEX 102	28418/2	2016/03/16	2017/03/15
Cable	HUBER SUHNER	SUCOFLEX 102	28417/2	2016/03/04	2017/03/03
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	v2.0.0.1	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



## 4. Antenna Requirements

### 4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2. Antenna Construction and Directional Gain

Antenna Type	Antenna Gain
Dipole Antenna	Antenna 1: 5.0 dBi
	Antenna 2: 5.0 dBi
	Antenna 3: 5.0 dBi

For Power directional gain=  $G_{ant} = 5.0$  dBi

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$   
= 9.77 (dBi)



## 5. Test of AC Power Line Conducted Emission

### 5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2. Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3. Typical Test Setup

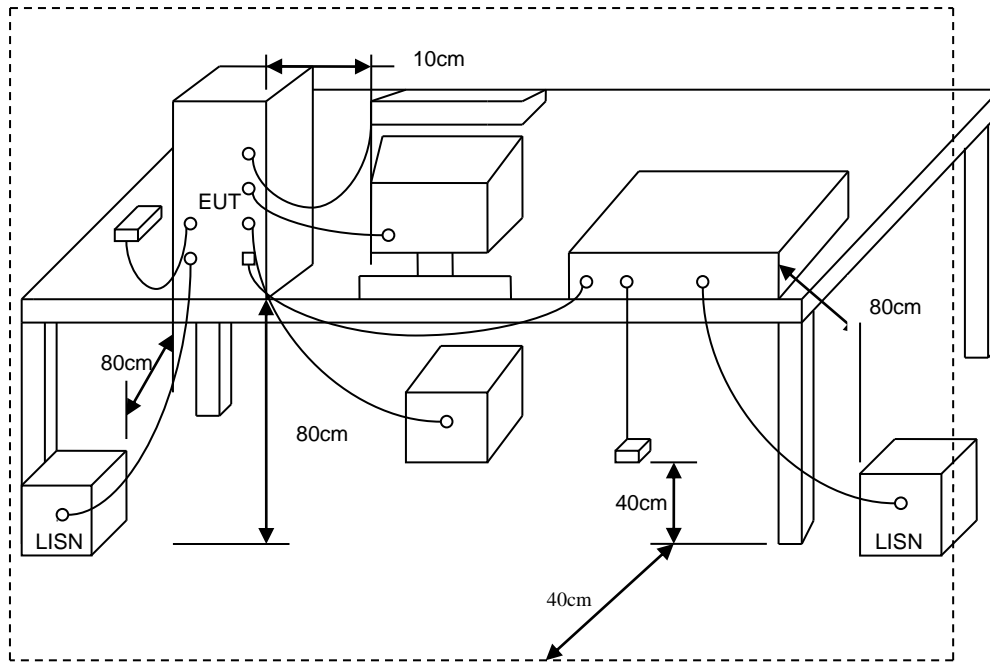



### 5.4. Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 1, CH 44	Temperature	: 21 °C
Test date	: Dec. 09, 2016	Humidity	: 57 %

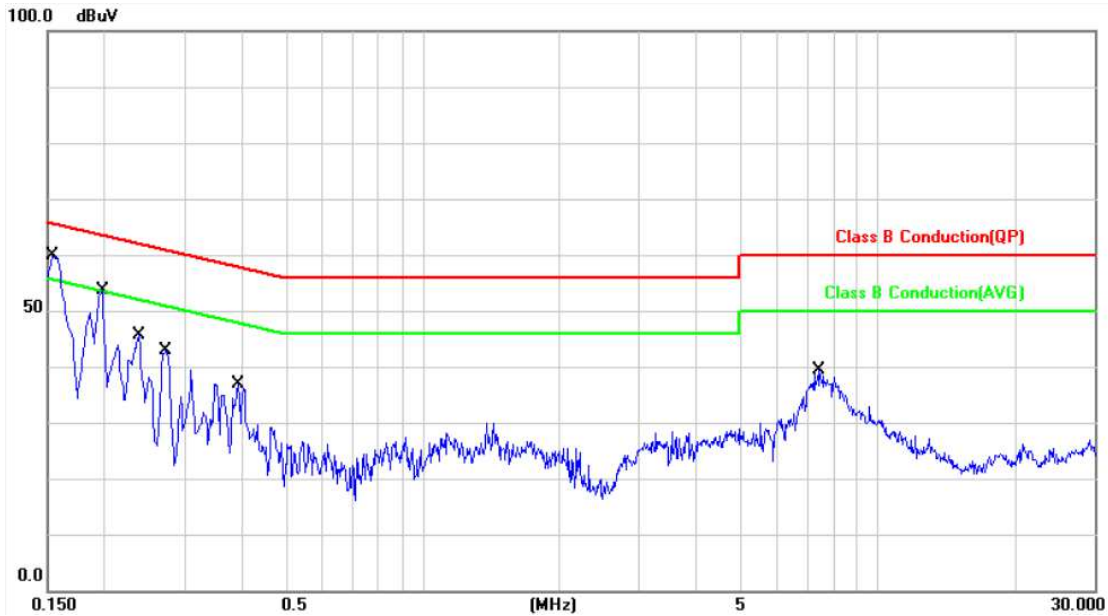

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	9.98	47.85	57.83	65.78	-7.95	QP	P
2	0.1539	9.98	37.10	47.08	55.78	-8.70	AVG	P
3	0.1980	9.97	40.76	50.73	63.69	-12.96	QP	P
4	0.1980	9.97	32.21	42.18	53.69	-11.51	AVG	P
5	0.2380	9.97	34.40	44.37	62.16	-17.79	QP	P
6	0.2380	9.97	28.58	38.55	52.16	-13.61	AVG	P
7	0.2740	9.97	31.01	40.98	60.99	-20.01	QP	P
8	0.2740	9.97	20.75	30.72	50.99	-20.27	AVG	P
9	0.3940	9.97	24.63	34.60	57.98	-23.38	QP	P
10	0.3940	9.97	20.05	30.02	47.98	-17.96	AVG	P
11	7.4220	10.21	24.02	34.23	60.00	-25.77	QP	P
12	7.4220	10.21	19.15	29.36	50.00	-20.64	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1, CH 44	Temperature	: 21 °C
Test date	: Dec. 09, 2016	Humidity	: 57 %

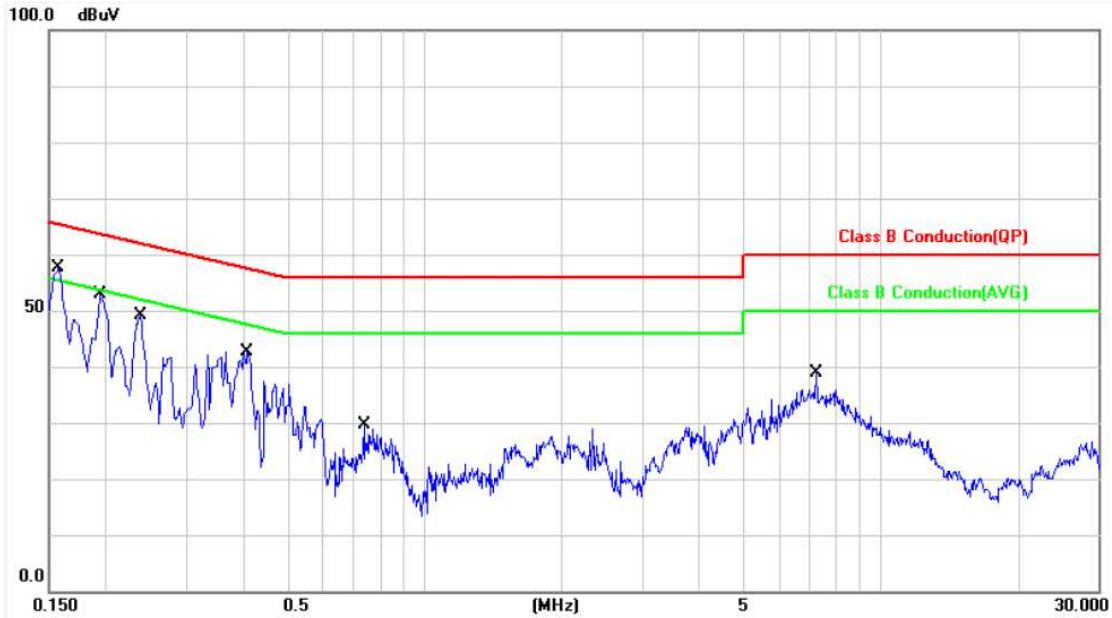


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.1580	9.98	46.31	56.29	65.56	-9.27	QP	P
2	0.1580	9.98	37.35	47.33	55.56	-8.23	AVG	P
3	0.1940	9.98	41.23	51.21	63.86	-12.65	QP	P
4	0.1940	9.98	34.63	44.61	53.86	-9.25	AVG	P
5	0.2380	9.97	37.33	47.30	62.16	-14.86	QP	P
6	0.2380	9.97	32.80	42.77	52.16	-9.39	AVG	P
7	0.4100	9.94	27.85	37.79	57.65	-19.86	QP	P
8	0.4100	9.94	22.63	32.57	47.65	-15.08	AVG	P
9	0.7380	9.97	14.14	24.11	56.00	-31.89	QP	P
10	0.7380	9.97	6.96	16.93	46.00	-29.07	AVG	P
11	7.2500	10.24	19.65	29.89	60.00	-30.11	QP	P
12	7.2500	10.24	13.73	23.97	50.00	-26.03	AVG	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 1, CH 157	Temperature	: 21 °C
Test date	: Dec. 09, 2016	Humidity	: 57 %

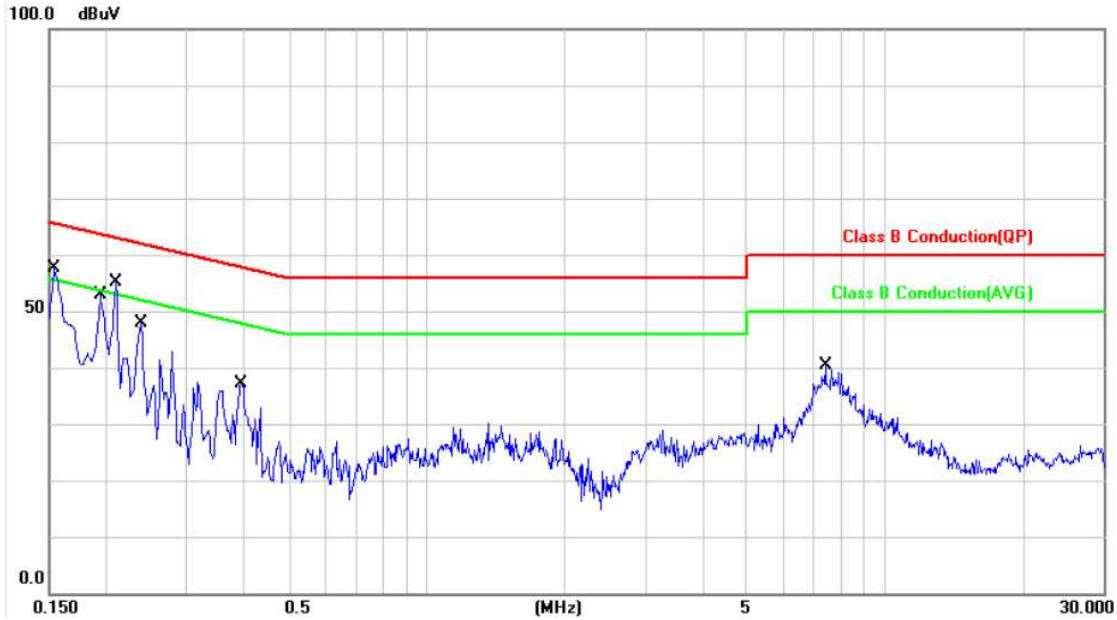

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	9.98	45.81	55.79	65.78	-9.99	QP	P
2	0.1539	9.98	35.07	45.05	55.78	-10.73	AVG	P
3	0.1940	9.97	41.41	51.38	63.86	-12.48	QP	P
4	0.1940	9.97	33.12	43.09	53.86	-10.77	AVG	P
5	0.2100	9.97	35.58	45.55	63.20	-17.65	QP	P
6	0.2100	9.97	19.75	29.72	53.20	-23.48	AVG	P
7	0.2380	9.97	36.04	46.01	62.16	-16.15	QP	P
8	0.2380	9.97	31.99	41.96	52.16	-10.20	AVG	P
9	0.3940	9.97	26.56	36.53	57.98	-21.45	QP	P
10	0.3940	9.97	24.15	34.12	47.98	-13.86	AVG	P
11	7.4420	10.21	23.43	33.64	60.00	-26.36	QP	P
12	7.4420	10.21	18.14	28.35	50.00	-21.65	AVG	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator





Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1, CH 157	Temperature	: 21 °C
Test date	: Dec. 09, 2016	Humidity	: 57 %




No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.1580	9.98	46.22	56.20	65.56	-9.36	QP	P
2	0.1580	9.98	37.85	47.83	55.56	-7.73	AVG	P
3	0.1980	9.98	41.11	51.09	63.69	-12.60	QP	P
4	0.1980	9.98	35.69	45.67	53.69	-8.02	AVG	P
5	0.2100	9.98	36.53	46.51	63.20	-16.69	QP	P
6	0.2100	9.98	20.27	30.25	53.20	-22.95	AVG	P
7	0.2340	9.97	37.57	47.54	62.30	-14.76	QP	P
8	0.2340	9.97	32.95	42.92	52.30	-9.38	AVG	P
9	0.3940	9.94	32.13	42.07	57.98	-15.91	QP	P
10	0.3940	9.94	30.09	40.03	47.98	-7.95	AVG	P
11	7.0260	10.24	19.62	29.86	60.00	-30.14	QP	P
12	7.0260	10.24	14.13	24.37	50.00	-25.63	AVG	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 7, CH 44	Temperature	: 23 °C
Test date	: Dec. 16, 2016	Humidity	: 48 %

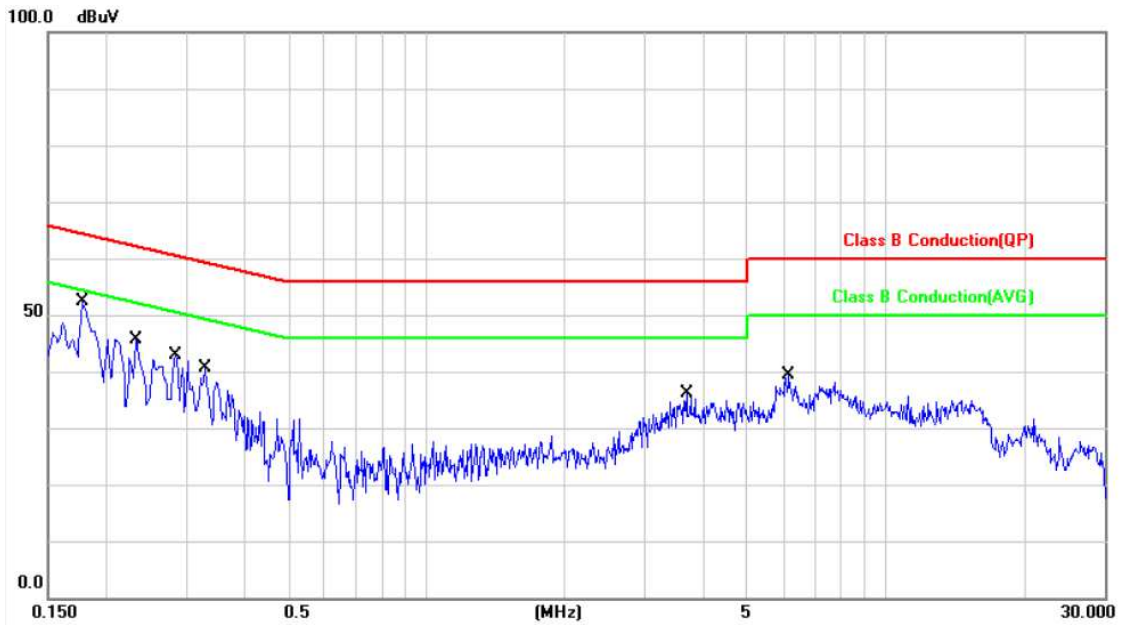


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1780	9.97	40.77	50.74	64.57	-13.83	QP	P
2	0.1780	9.97	30.34	40.31	54.57	-14.26	AVG	P
3	0.2340	9.97	30.69	40.66	62.30	-21.64	QP	P
4	0.2340	9.97	17.70	27.67	52.30	-24.63	AVG	P
5	0.2860	9.97	26.01	35.98	60.64	-24.66	QP	P
6	0.2860	9.97	13.24	23.21	50.64	-27.43	AVG	P
7	0.3300	9.96	23.56	33.52	59.45	-25.93	QP	P
8	0.3300	9.96	12.64	22.60	49.45	-26.85	AVG	P
9	3.6900	10.14	19.04	29.18	56.00	-26.82	QP	P
10	3.6900	10.14	12.55	22.69	46.00	-23.31	AVG	P
11	6.1820	10.20	23.69	33.89	60.00	-26.11	QP	P
12	6.1820	10.20	15.96	26.16	50.00	-23.84	AVG	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 7, CH 44	Temperature	: 23 °C
Test date	: Dec. 16, 2016	Humidity	: 48 %

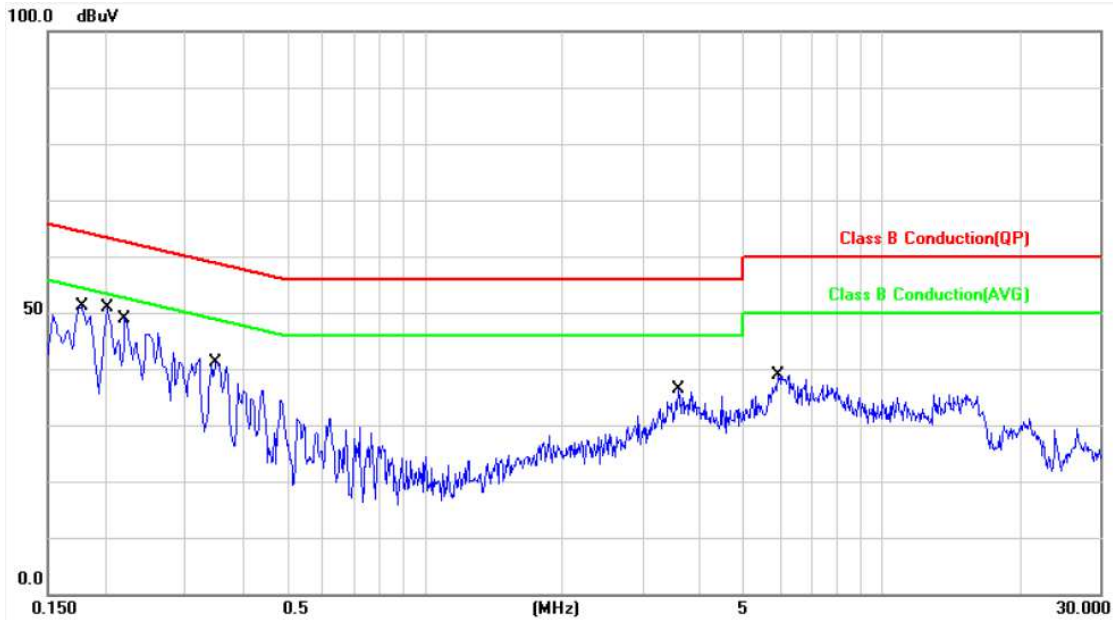


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1780	9.98	41.17	51.15	64.57	-13.42	QP	P
2	0.1780	9.98	31.31	41.29	54.57	-13.28	AVG	P
3	0.2020	9.98	34.23	44.21	63.52	-19.31	QP	P
4	0.2020	9.98	20.15	30.13	53.52	-23.39	AVG	P
5	0.2220	9.97	36.93	46.90	62.74	-15.84	QP	P
6	0.2220	9.97	27.80	37.77	52.74	-14.97	AVG	P
7	0.3500	9.94	29.98	39.92	58.96	-19.04	QP	P
8	0.3500	9.94	22.44	32.38	48.96	-16.58	AVG	P
9	3.5940	10.13	18.91	29.04	56.00	-26.96	QP	P
10	3.5940	10.13	12.50	22.63	46.00	-23.37	AVG	P
11	5.9500	10.21	22.59	32.80	60.00	-27.20	QP	P
12	5.9500	10.21	15.70	25.91	50.00	-24.09	AVG	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 7, CH 157	Temperature	: 23 °C
Test date	: Dec. 16, 2016	Humidity	: 48 %

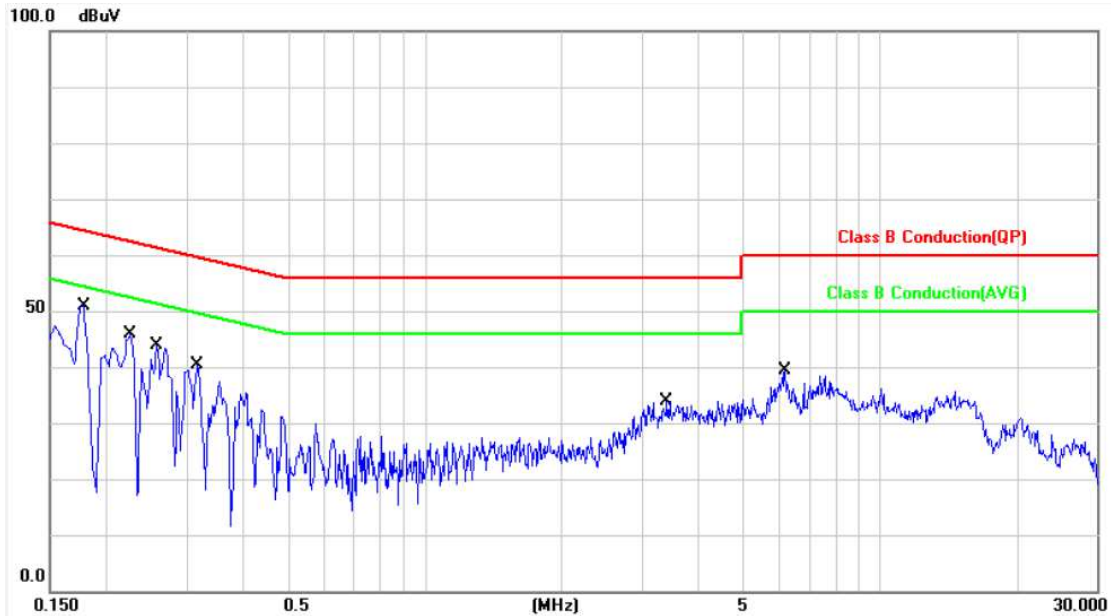


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1780	9.97	40.65	50.62	64.57	-13.95	QP	P
2	0.1780	9.97	30.26	40.23	54.57	-14.34	AVG	P
3	0.2260	9.97	33.75	43.72	62.59	-18.87	QP	P
4	0.2260	9.97	23.97	33.94	52.59	-18.65	AVG	P
5	0.2580	9.97	28.78	38.75	61.49	-22.74	QP	P
6	0.2580	9.97	17.16	27.13	51.49	-24.36	AVG	P
7	0.3180	9.96	27.11	37.07	59.76	-22.69	QP	P
8	0.3180	9.96	15.98	25.94	49.76	-23.82	AVG	P
9	3.4140	10.12	18.91	29.03	56.00	-26.97	QP	P
10	3.4140	10.12	12.45	22.57	46.00	-23.43	AVG	P
11	6.2020	10.20	24.28	34.48	60.00	-25.52	QP	P
12	6.2020	10.20	15.95	26.15	50.00	-23.85	AVG	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 7, CH 157	Temperature	: 23 °C
Test date	: Dec. 16, 2016	Humidity	: 48 %

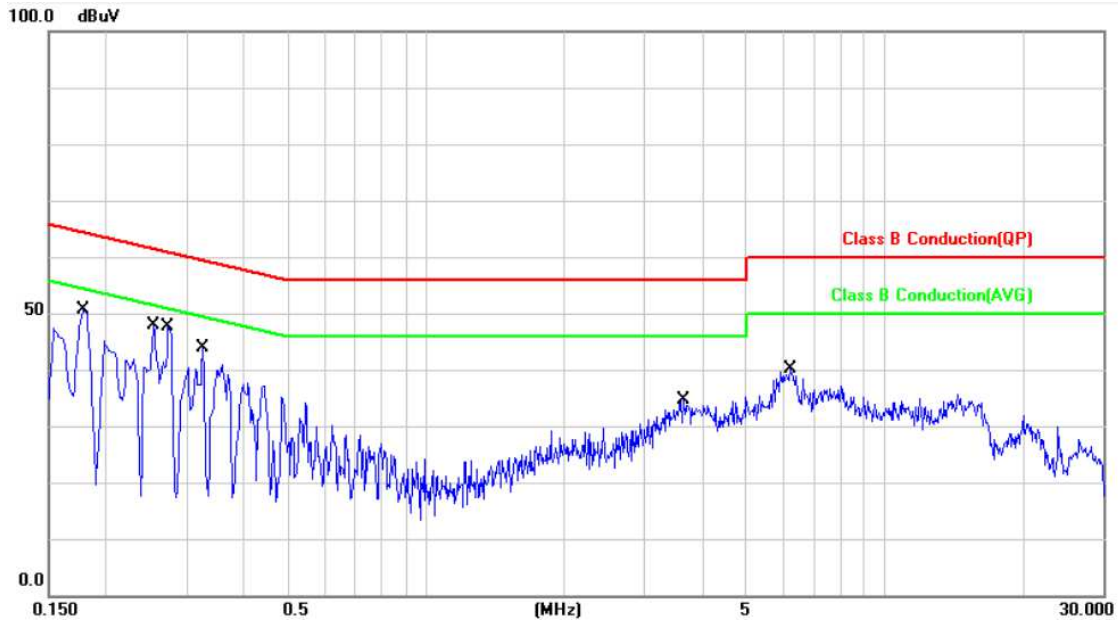

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1780	9.98	40.98	50.96	64.57	-13.61	QP	P
2	0.1780	9.98	31.51	41.49	54.57	-13.08	AVG	P
3	0.2540	9.97	29.59	39.56	61.62	-22.06	QP	P
4	0.2540	9.97	16.57	26.54	51.62	-25.08	AVG	P
5	0.2740	9.96	33.22	43.18	60.99	-17.81	QP	P
6	0.2740	9.96	24.36	34.32	50.99	-16.67	AVG	P
7	0.3260	9.95	26.39	36.34	59.55	-23.21	QP	P
8	0.3260	9.95	14.60	24.55	49.55	-25.00	AVG	P
9	3.6540	10.13	18.84	28.97	56.00	-27.03	QP	P
10	3.6540	10.13	12.55	22.68	46.00	-23.32	AVG	P
11	6.2220	10.23	23.06	33.29	60.00	-26.71	QP	P
12	6.2220	10.23	16.30	26.53	50.00	-23.47	AVG	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



## 6. Test of Spurious Emission (Radiated)

### 6.1. Test Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to  $10$  dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of  $15.6$  dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27$ dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


### 6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




### 6.3. Typical Test Setup


Below 30MHz test setup

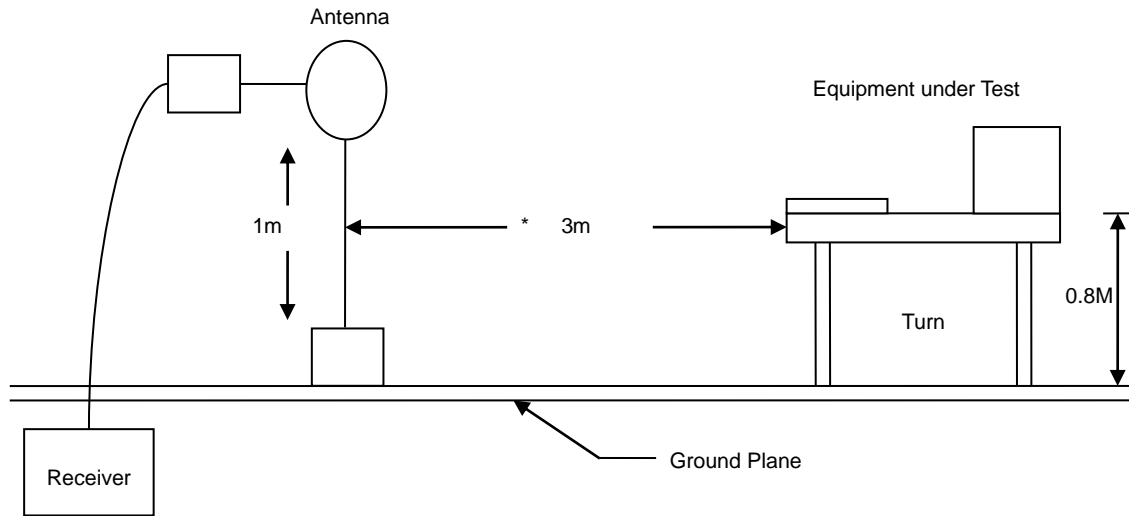

30MHz- 1GHz Test Setup

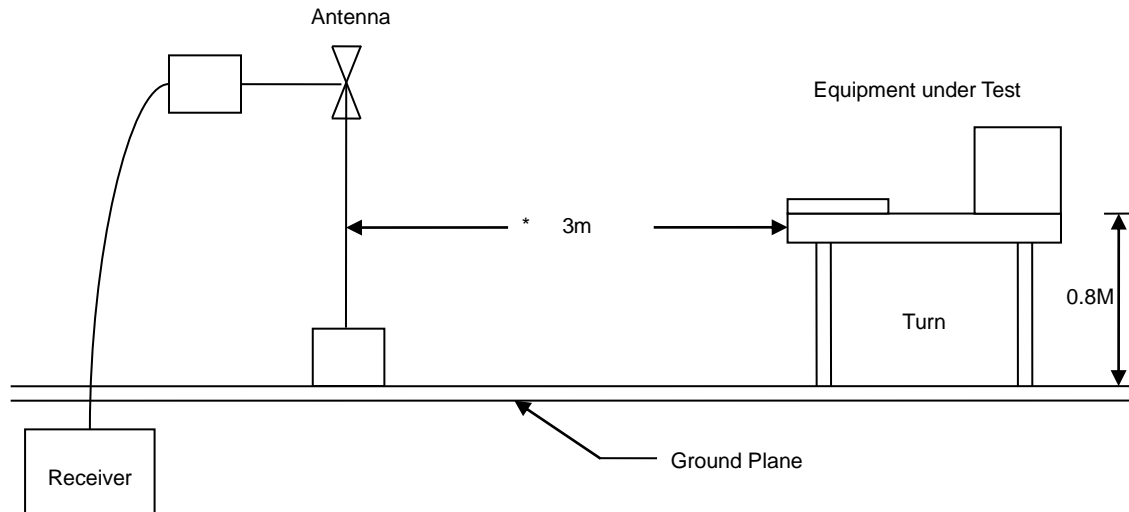

Above 1GHz Test Setup

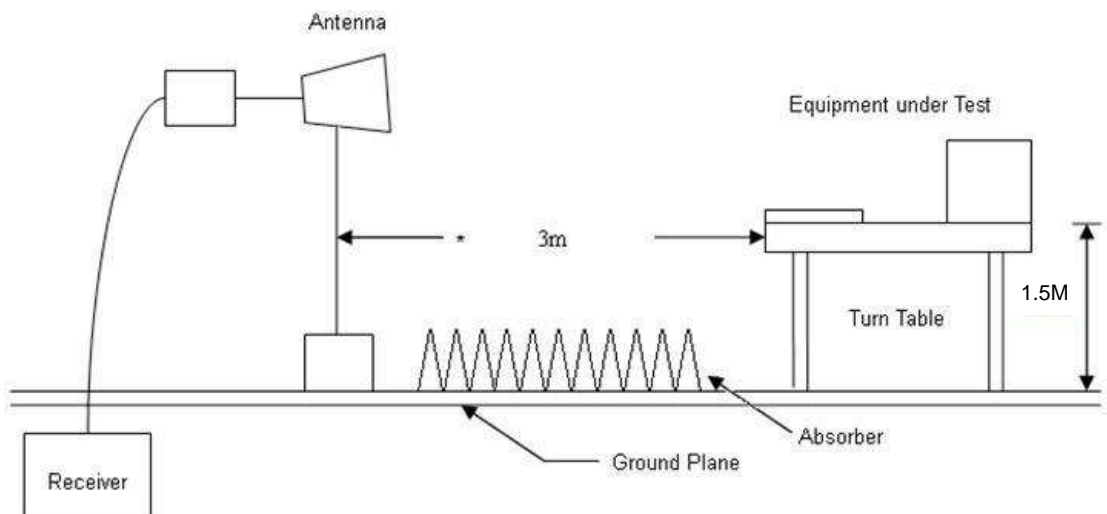




### 6.4. Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

### 6.5. Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

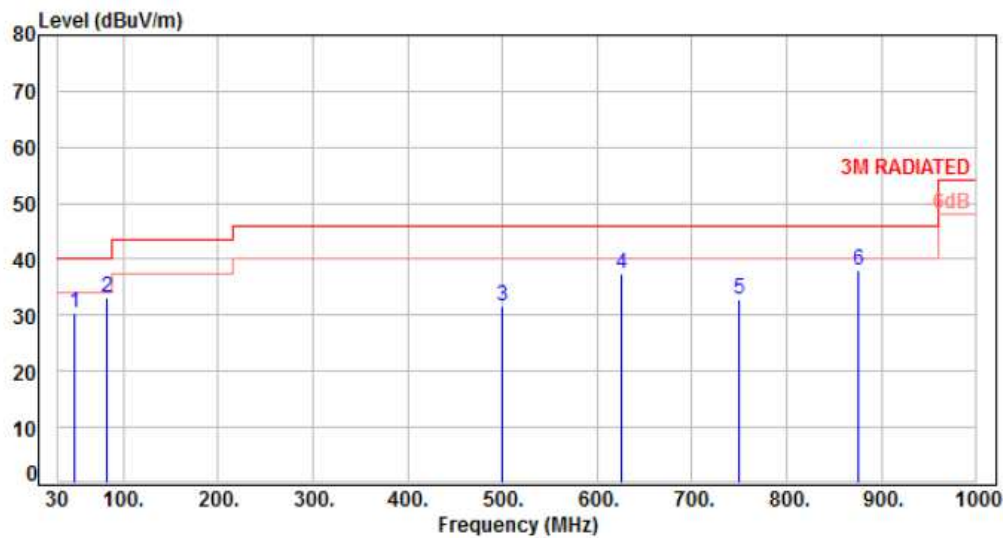

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	48.26	-9.73	40.14	30.41	40.00	-9.59	QP	102	351	P
2	82.55	-15.23	48.26	33.03	40.00	-6.97	Peak	300	0	P
3	500.25	-4.18	35.79	31.61	46.00	-14.39	Peak	300	0	P
4	625.00	-1.71	39.25	37.54	46.00	-8.46	Peak	300	0	P
5	750.50	0.39	32.49	32.88	46.00	-13.12	Peak	300	0	P
6	875.63	1.87	36.10	37.97	46.00	-8.03	Peak	300	0	P

Note: Level = Reading + Factor


Margin = Level – Limit

Factor = Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

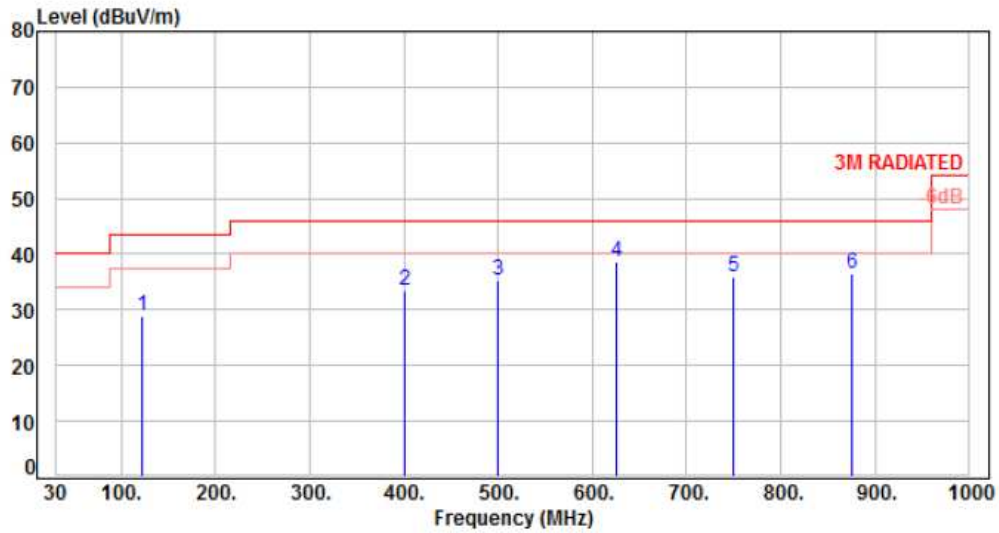


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	122.51	-12.22	41.27	29.05	43.50	-14.45	Peak	100	0	P
2	400.48	-6.38	39.81	33.43	46.00	-12.57	Peak	100	0	P
3	500.25	-4.18	39.42	35.24	46.00	-10.76	Peak	100	0	P
4	625.55	-1.70	40.18	38.48	46.00	-7.52	Peak	100	0	P
5	750.45	0.39	35.36	35.75	46.00	-10.25	Peak	100	0	P
6	875.22	1.86	34.59	36.45	46.00	-9.55	Peak	100	0	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

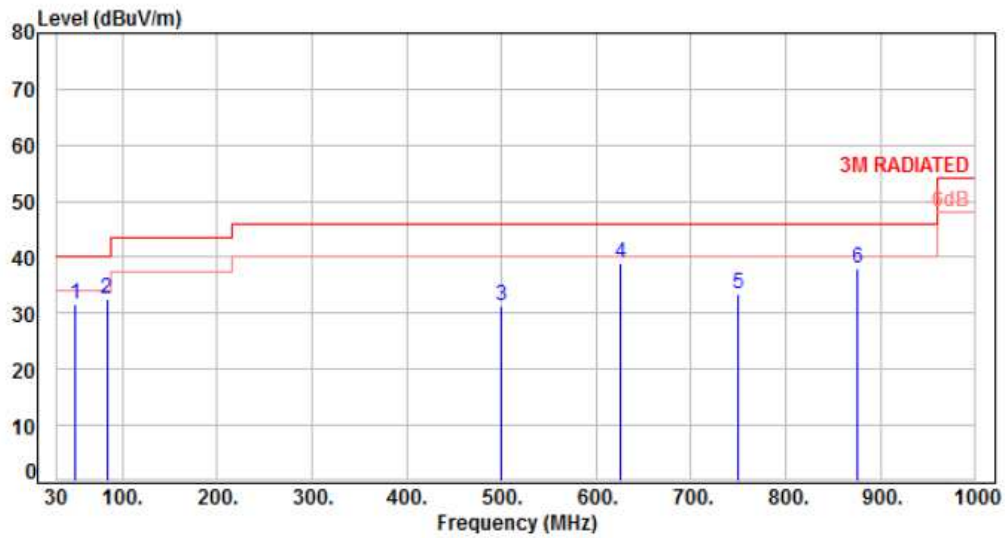


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	50.16	-9.74	41.36	31.62	40.00	-8.38	QP	111	342	P
2	83.44	-15.36	48.02	32.66	40.00	-7.34	Peak	300	0	P
3	500.00	-4.18	35.36	31.18	46.00	-14.82	Peak	200	0	P
4	625.35	-1.70	40.57	38.87	46.00	-7.13	Peak	300	0	P
5	750.00	0.39	33.16	33.55	46.00	-12.45	Peak	300	0	P
6	875.15	1.86	36.28	38.14	46.00	-7.86	Peak	300	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

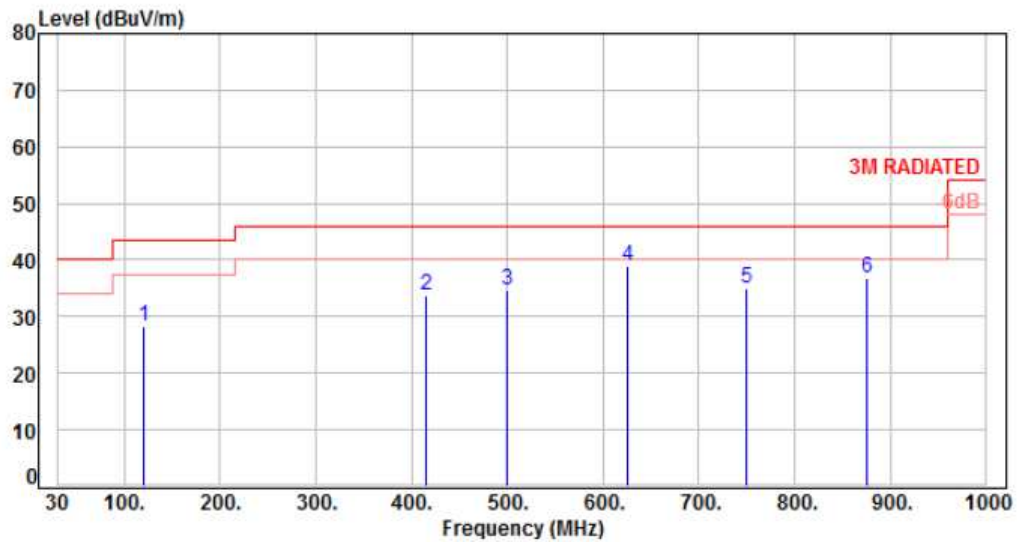


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	120.45	-12.39	40.67	28.28	43.50	-15.22	Peak	100	0	P
2	415.33	-5.94	39.58	33.64	46.00	-12.36	Peak	100	0	P
3	500.11	-4.18	38.99	34.81	46.00	-11.19	Peak	100	0	P
4	625.05	-1.70	40.56	38.86	46.00	-7.14	Peak	100	0	P
5	750.35	0.39	34.57	34.96	46.00	-11.04	Peak	100	0	P
6	875.11	1.86	34.97	36.83	46.00	-9.17	Peak	100	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

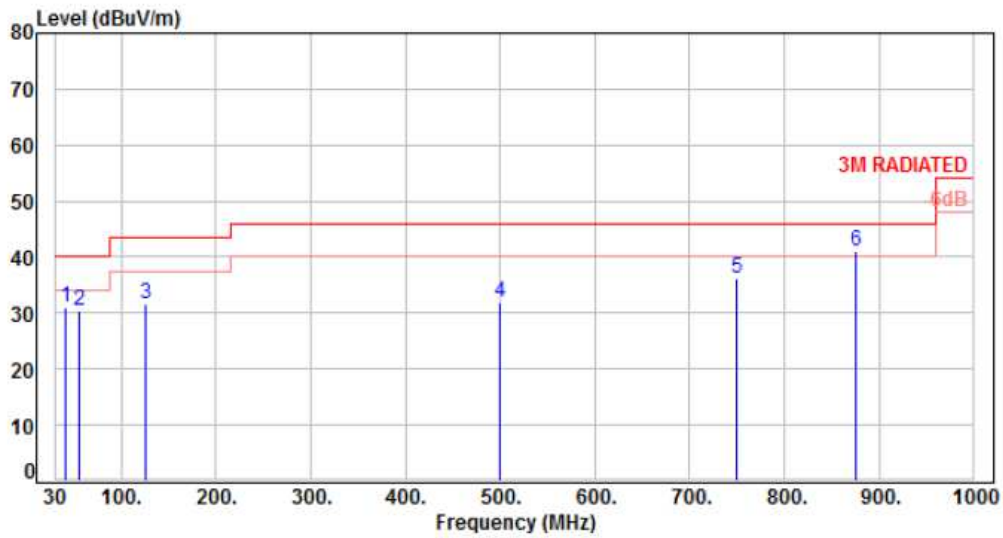


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	41.36	-10.03	40.95	30.92	40.00	-9.08	Peak	200	0	P
2	55.36	-10.12	40.68	30.56	40.00	-9.44	QP	115	285	P
3	125.00	-12.00	43.65	31.65	43.50	-11.85	Peak	200	0	P
4	499.48	-4.19	36.24	32.05	46.00	-13.95	Peak	200	0	P
5	750.50	0.39	35.94	36.33	46.00	-9.67	Peak	200	0	P
6	875.55	1.87	39.14	41.01	46.00	-4.99	Peak	200	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

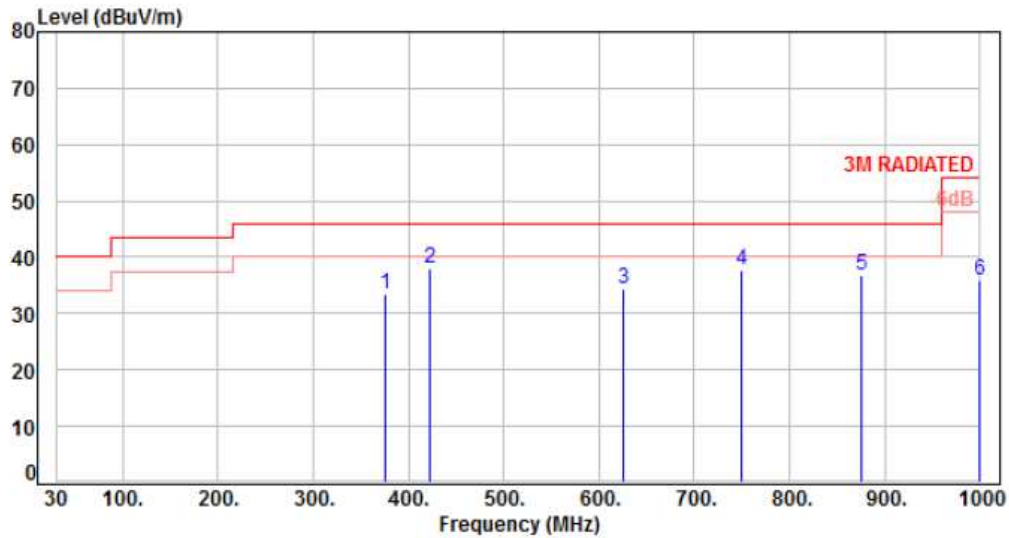


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	375.50	-7.06	40.62	33.56	46.00	-12.44	Peak	100	0	P
2	422.36	-5.74	43.74	38.00	46.00	-8.00	Peak	100	0	P
3	625.35	-1.70	36.15	34.45	46.00	-11.55	Peak	100	0	P
4	750.11	0.39	37.24	37.63	46.00	-8.37	Peak	100	0	P
5	875.05	1.86	35.02	36.88	46.00	-9.12	Peak	100	0	P
6	1000.00	3.44	32.58	36.02	54.00	-17.98	Peak	100	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 7, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

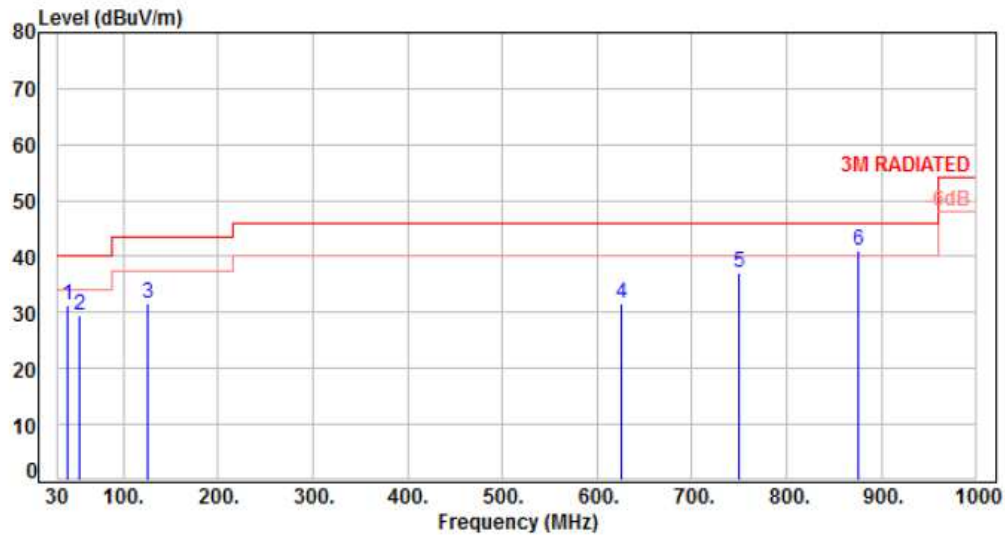


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	41.88	-10.00	41.27	31.27	40.00	-8.73	Peak	200	0	P
2	53.65	-9.99	39.44	29.45	40.00	-10.55	QP	111	298	P
3	125.15	-11.99	43.65	31.66	43.50	-11.84	Peak	200	0	P
4	625.55	-1.70	33.22	31.52	46.00	-14.48	Peak	200	0	P
5	750.25	0.39	36.85	37.24	46.00	-8.76	Peak	200	0	P
6	875.11	1.86	39.35	41.21	46.00	-4.79	Peak	200	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 7, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 62 %

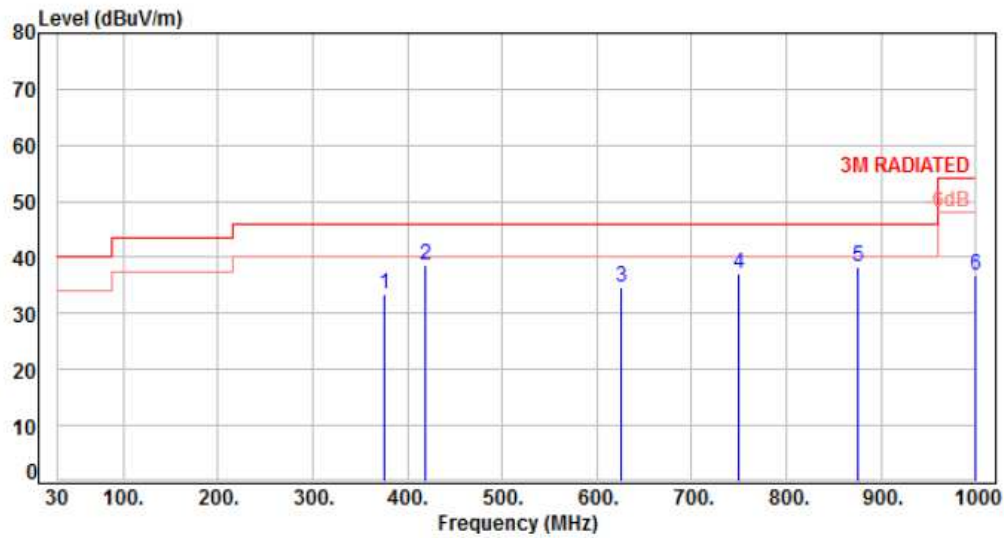


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	375.00	-7.07	40.58	33.51	46.00	-12.49	Peak	100	0	P
2	419.05	-5.82	44.56	38.74	46.00	-7.26	Peak	100	0	P
3	625.00	-1.71	36.52	34.81	46.00	-11.19	Peak	100	0	P
4	750.55	0.39	36.59	36.98	46.00	-9.02	Peak	100	0	P
5	875.00	1.85	36.51	38.36	46.00	-7.64	Peak	100	0	P
6	1000.00	3.44	33.48	36.92	54.00	-17.08	Peak	100	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

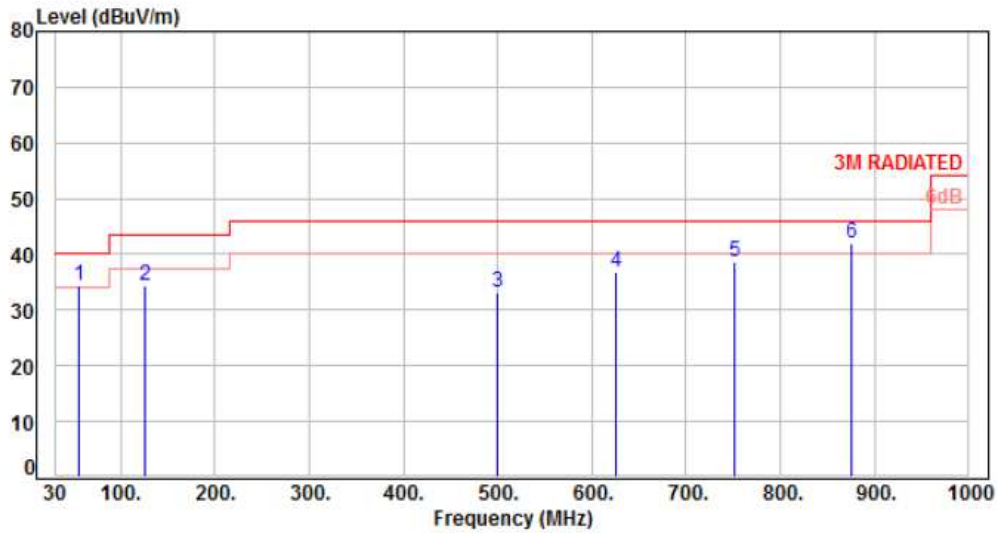


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	55.22	-10.11	44.39	34.28	40.00	-5.72	Peak	300	0	P
2	125.06	-12.00	46.41	34.41	43.50	-9.09	Peak	300	0	P
3	500.45	-4.17	37.26	33.09	46.00	-12.91	Peak	300	0	P
4	625.58	-1.70	38.39	36.69	46.00	-9.31	Peak	300	0	P
5	750.71	0.39	38.21	38.60	46.00	-7.40	Peak	300	0	P
6	875.84	1.87	40.05	41.92	46.00	-4.08	Peak	300	0	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

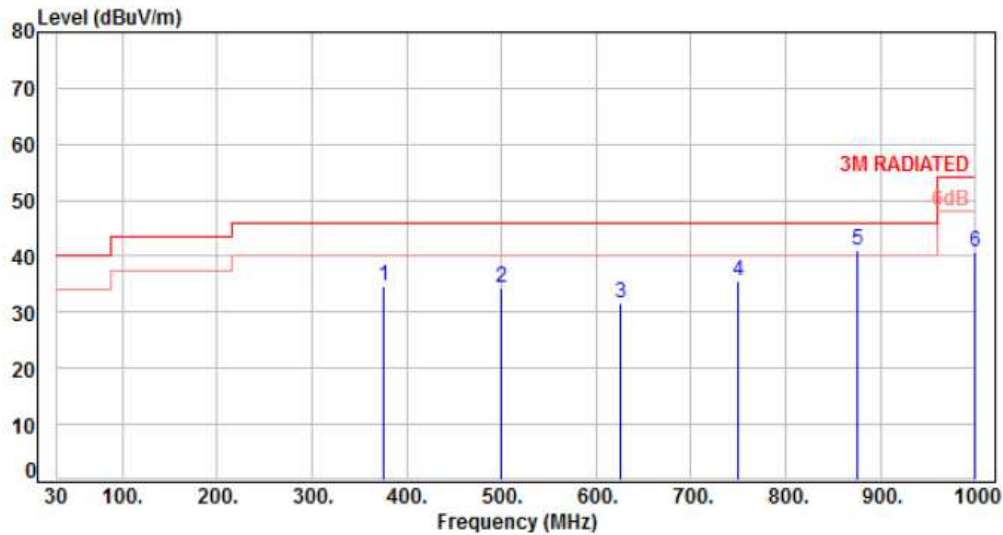


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	375.25	-7.06	41.65	34.59	46.00	-11.41	Peak	100	0	P
2	500.15	-4.18	38.69	34.51	46.00	-11.49	Peak	100	0	P
3	625.55	-1.70	33.46	31.76	46.00	-14.24	Peak	100	0	P
4	750.00	0.39	35.25	35.64	46.00	-10.36	Peak	100	0	P
5	875.45	1.86	39.22	41.08	46.00	-4.92	Peak	100	0	P
6	1000.00	3.44	37.22	40.66	54.00	-13.34	Peak	100	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 13, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

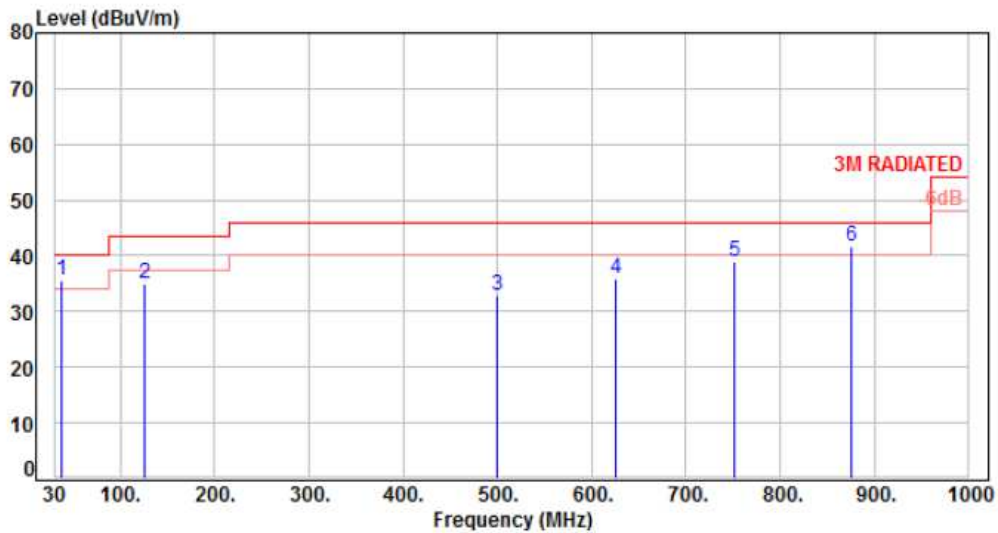


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	36.79	-10.40	46.09	35.69	40.00	-4.31	Peak	200	0	P
2	125.06	-12.00	47.04	35.04	43.50	-8.46	Peak	200	0	P
3	500.45	-4.17	37.09	32.92	46.00	-13.08	Peak	200	0	P
4	625.58	-1.70	37.59	35.89	46.00	-10.11	Peak	200	0	P
5	750.71	0.39	38.60	38.99	46.00	-7.01	Peak	200	0	P
6	875.84	1.87	39.67	41.54	46.00	-4.46	Peak	200	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 13, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

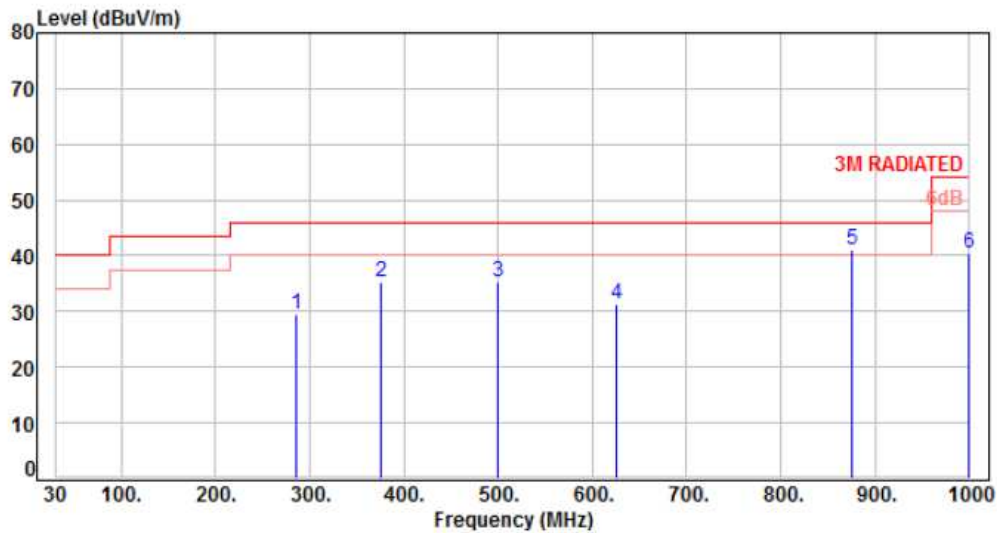


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	286.08	-9.44	38.80	29.36	46.00	-16.64	Peak	100	0	P
2	375.32	-7.06	42.23	35.17	46.00	-10.83	Peak	100	0	P
3	500.45	-4.17	39.44	35.27	46.00	-10.73	Peak	100	0	P
4	625.58	-1.70	32.92	31.22	46.00	-14.78	Peak	100	0	P
5	875.84	1.87	39.18	41.05	46.00	-4.95	Peak	100	0	P
6	1000.00	3.44	36.89	40.33	54.00	-13.67	Peak	100	0	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

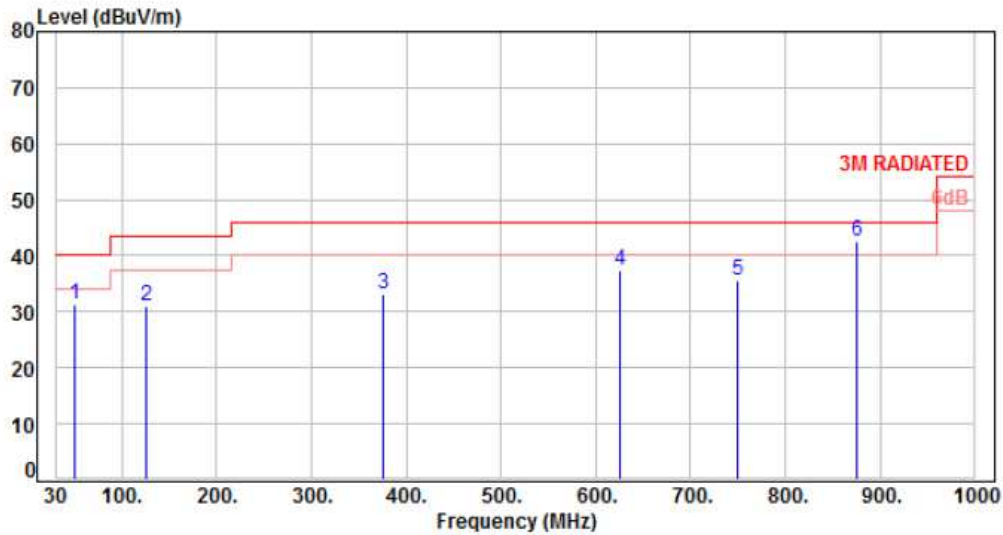

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	50.22	-9.75	40.96	31.21	40.00	-8.79	QP	107	263	P
2	125.04	-12.00	43.11	31.11	43.50	-12.39	Peak	200	0	P
3	375.45	-7.06	40.36	33.30	46.00	-12.70	Peak	100	0	P
4	625.55	-1.70	39.11	37.41	46.00	-8.59	Peak	200	0	P
5	750.25	0.39	35.30	35.69	46.00	-10.31	Peak	200	0	P
6	875.03	1.86	40.66	42.52	46.00	-3.48	Peak	200	0	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, CH 44	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

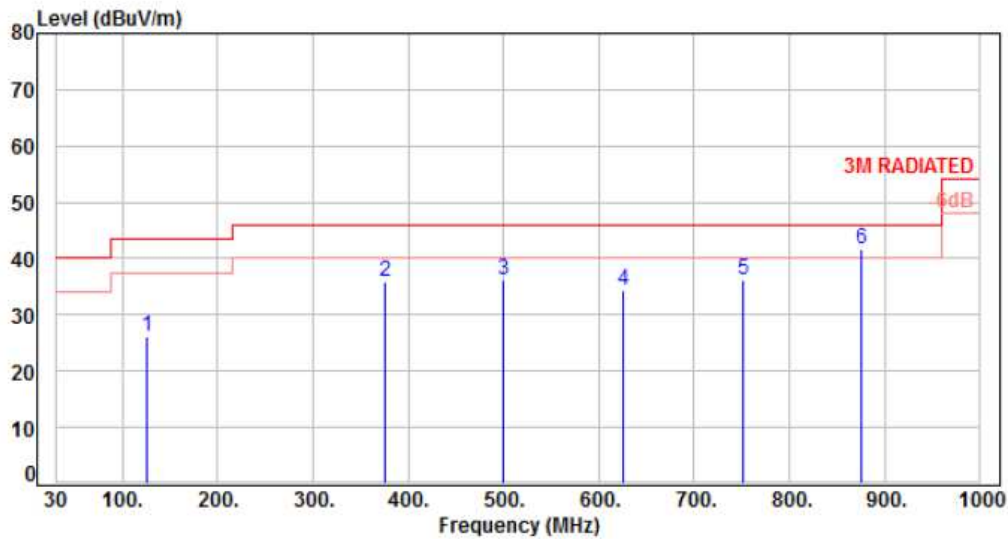


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	125.68	-11.95	38.26	26.31	43.50	-17.19	Peak	100	0	P
2	375.05	-7.07	43.11	36.04	46.00	-9.96	Peak	100	0	P
3	500.10	-4.18	40.30	36.12	46.00	-9.88	Peak	100	0	P
4	625.55	-1.70	36.14	34.44	46.00	-11.56	Peak	100	0	P
5	750.80	0.39	35.70	36.09	46.00	-9.91	Peak	100	0	P
6	875.11	1.86	39.85	41.71	46.00	-4.29	Peak	100	0	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: VERTICAL
Test Mode	: Mode 19, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

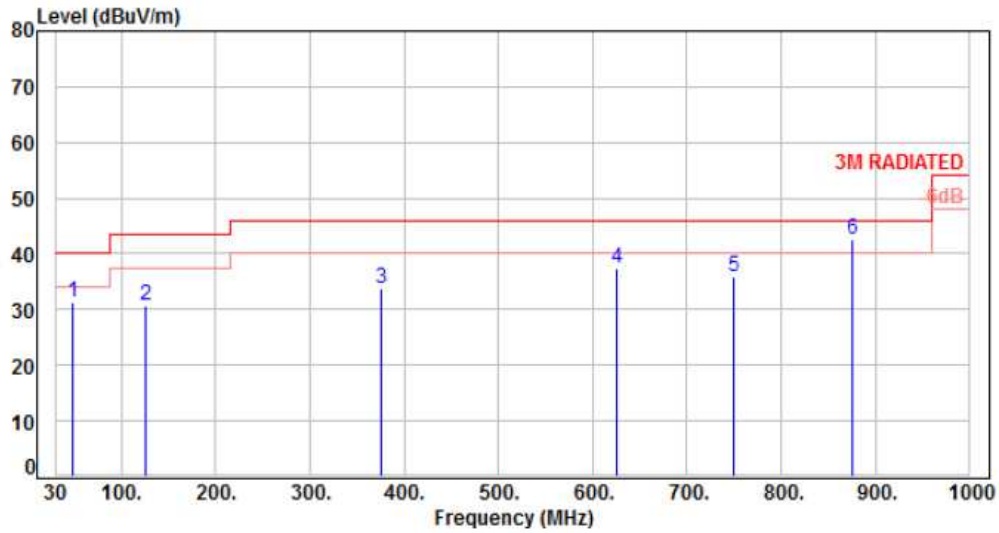


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	47.69	-9.74	41.05	31.31	40.00	-8.69	QP	100	297	P
2	125.00	-12.00	42.69	30.69	43.50	-12.81	Peak	200	0	P
3	375.00	-7.07	40.85	33.78	46.00	-12.22	Peak	100	0	P
4	625.17	-1.70	39.02	37.32	46.00	-8.68	Peak	200	0	P
5	750.55	0.39	35.61	36.00	46.00	-10.00	Peak	200	0	P
6	874.99	1.85	40.85	42.70	46.00	-3.30	Peak	200	0	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: PoE	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 19, CH 157	Temperature	: 24 °C
Test Date	: Jan. 12, 2017	Humidity	: 66 %

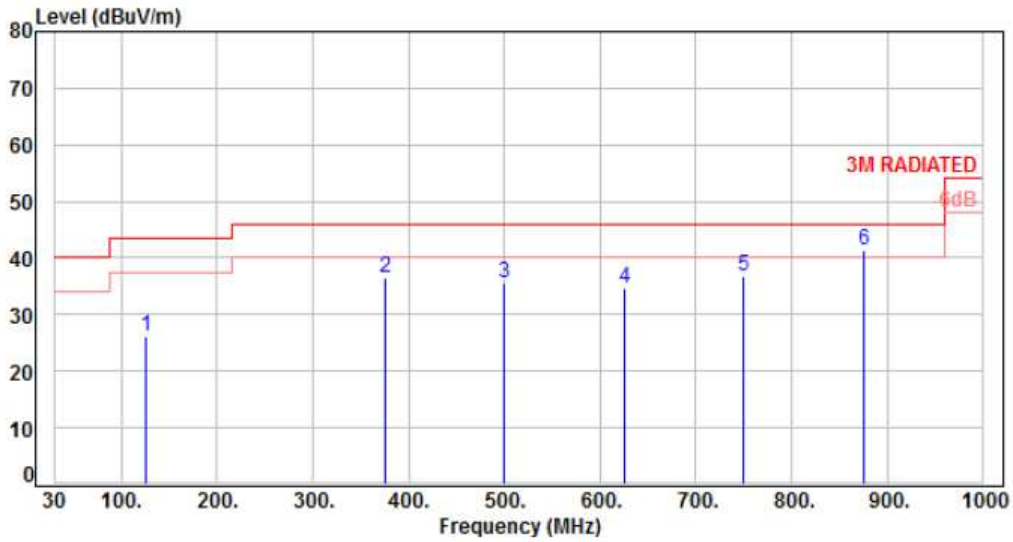


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	125.55	-11.96	38.17	26.21	43.50	-17.29	Peak	100	0	P
2	375.33	-7.06	43.51	36.45	46.00	-9.55	Peak	100	0	P
3	500.00	-4.18	39.67	35.49	46.00	-10.51	Peak	100	0	P
4	625.33	-1.70	36.47	34.77	46.00	-11.23	Peak	100	0	P
5	750.25	0.39	36.55	36.94	46.00	-9.06	Peak	100	0	P
6	875.20	1.86	39.47	41.33	46.00	-4.67	Peak	100	0	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



### 6.6. Test Result and Data (1GHz ~ 40GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 36	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

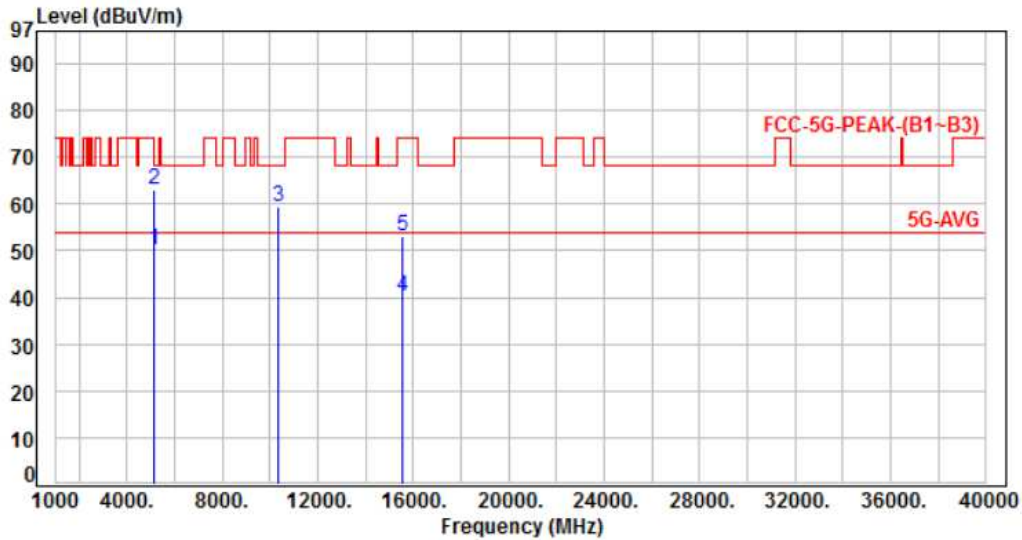


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	56.55	50.01	54.00	-3.99	Average	115	282	P
2	5150.00	-6.54	69.70	63.16	74.00	-10.84	Peak	115	282	P
3	10360.00	0.66	58.86	59.52	68.20	-8.68	Peak	138	318	P
4	15540.00	5.36	34.90	40.26	54.00	-13.74	Average	154	4	P
5	15540.00	5.36	47.83	53.19	74.00	-20.81	Peak	154	4	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 01	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

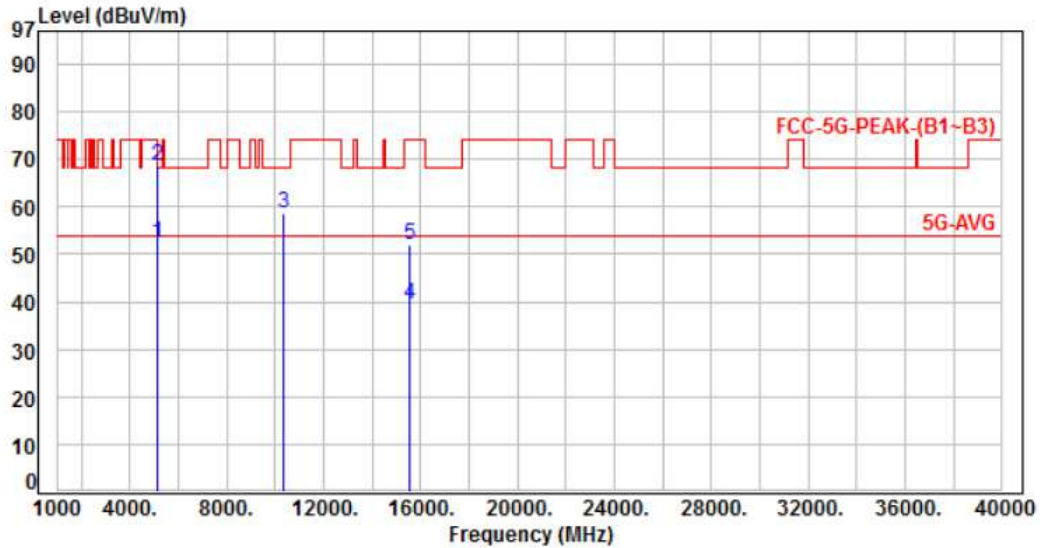


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	59.07	52.53	54.00	-1.47	Average	215	264	P
2	5150.00	-6.54	75.31	68.77	74.00	-5.23	Peak	215	264	P
3	10360.00	0.66	57.95	58.61	68.20	-9.59	Peak	180	255	P
4	15540.00	5.36	34.13	39.49	54.00	-14.51	Average	138	302	P
5	15540.00	5.36	46.68	52.04	74.00	-21.96	Peak	138	302	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 44	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

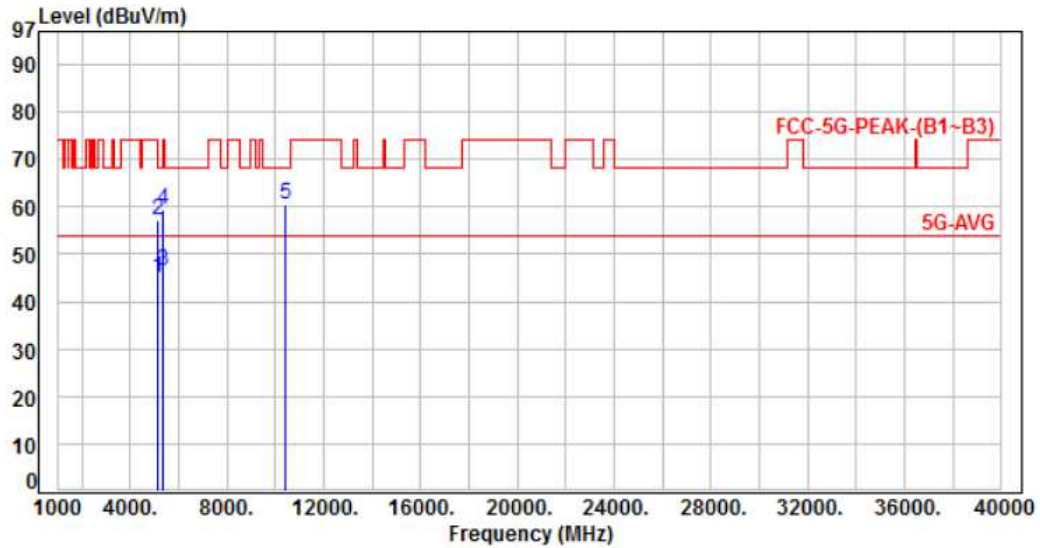


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	51.59	45.05	54.00	-8.95	Average	190	265	P
2	5150.00	-6.54	63.66	57.12	74.00	-16.88	Peak	190	265	P
3	5350.00	-6.06	52.58	46.52	54.00	-7.48	Average	190	265	P
4	5350.00	-6.06	65.61	59.55	74.00	-14.45	Peak	190	265	P
5	10440.00	0.70	59.66	60.36	68.20	-7.84	Peak	100	298	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 44	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

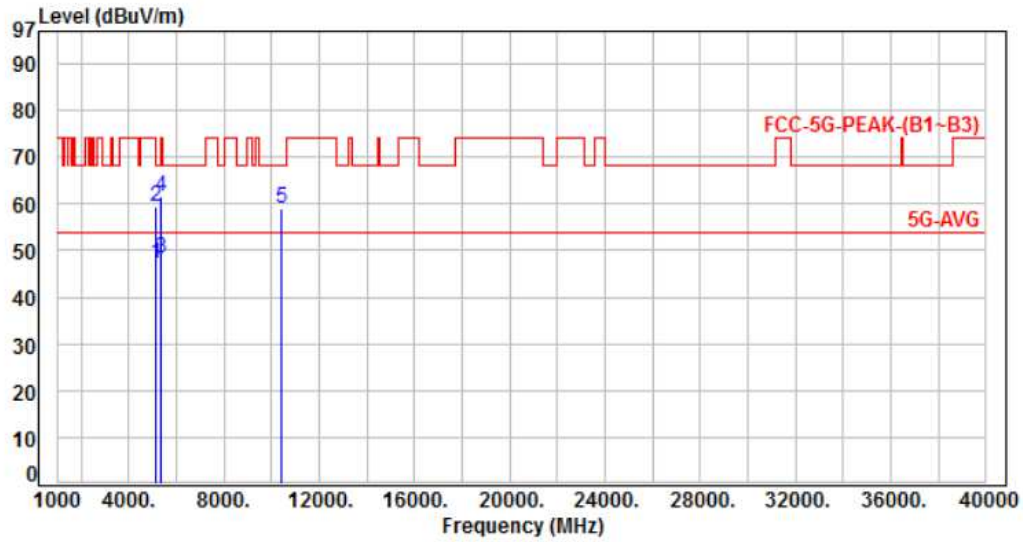


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	53.71	47.17	54.00	-6.83	Average	141	210	P
2	5150.00	-6.54	65.76	59.22	74.00	-14.78	Peak	141	210	P
3	5350.00	-6.06	54.32	48.26	54.00	-5.74	Average	141	210	P
4	5350.00	-6.06	67.72	61.66	74.00	-12.34	Peak	141	210	P
5	10440.00	0.70	58.43	59.13	68.20	-9.07	Peak	116	78	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 48	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

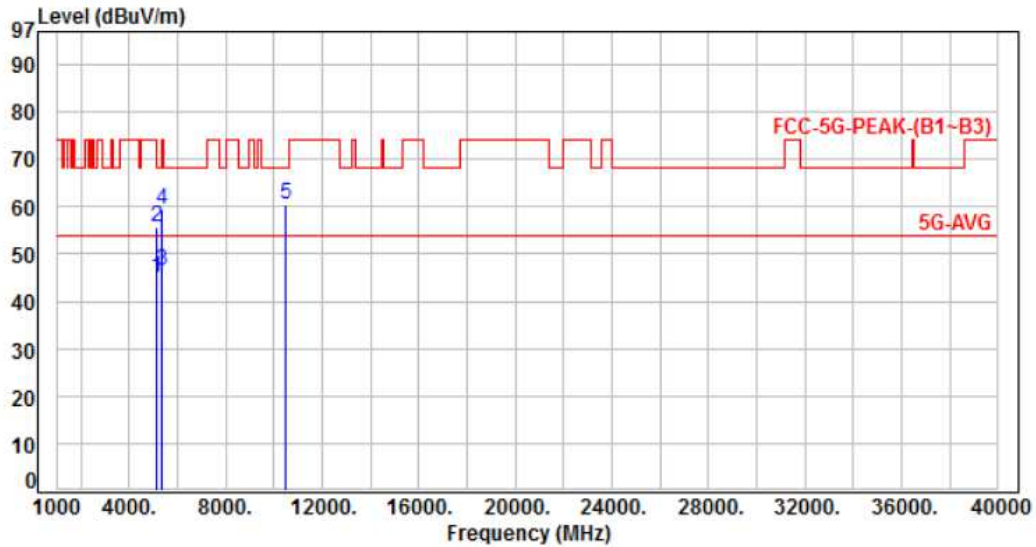


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	51.70	45.16	54.00	-8.84	Average	195	267	P
2	5150.00	-6.54	62.28	55.74	74.00	-18.26	Peak	195	267	P
3	5350.00	-6.06	52.59	46.53	54.00	-7.47	Average	195	267	P
4	5350.00	-6.06	65.53	59.47	74.00	-14.53	Peak	195	267	P
5	10480.00	0.73	59.93	60.66	68.20	-7.54	Peak	102	286	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 48	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

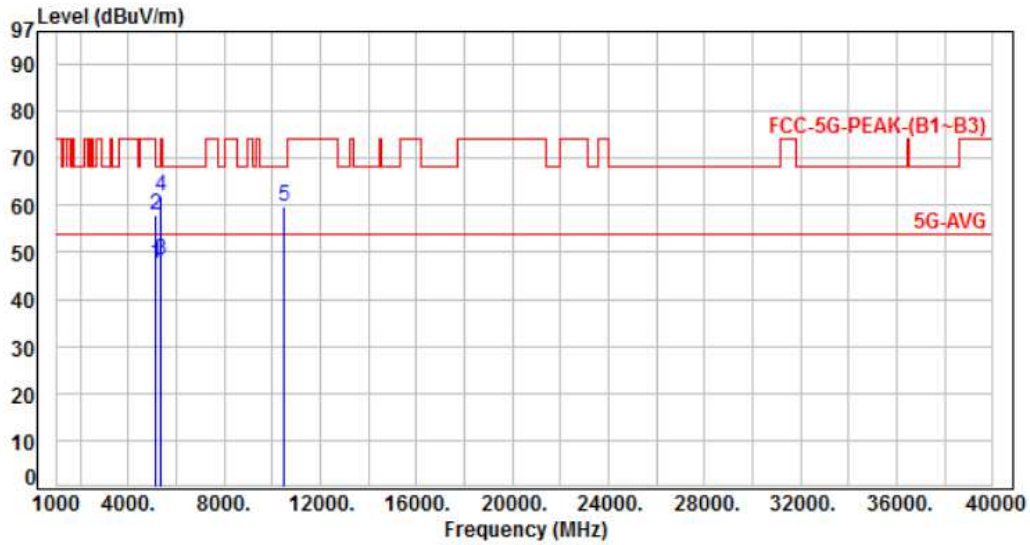


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	54.12	47.58	54.00	-6.42	Average	162	147	P
2	5150.00	-6.54	64.38	57.84	74.00	-16.16	Peak	162	147	P
3	5350.00	-6.06	54.45	48.39	54.00	-5.61	Average	162	147	P
4	5350.00	-6.06	67.91	61.85	74.00	-12.15	Peak	162	147	P
5	10480.00	0.73	59.05	59.78	68.20	-8.42	Peak	110	258	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 149	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

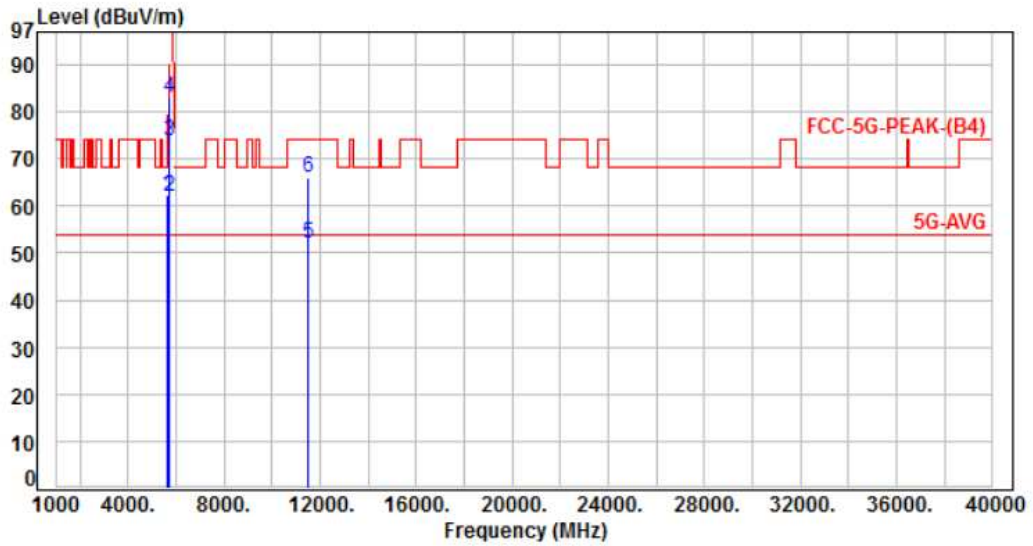


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	68.26	62.49	68.20	-5.71	Peak	100	296	P
2	5700.00	-5.79	67.79	62.00	105.20	-43.20	Peak	100	296	P
3	5720.00	-5.80	79.59	73.79	110.80	-37.01	Peak	100	296	P
4	5725.00	-5.80	88.67	82.87	122.20	-39.33	Peak	100	296	P
5	11490.00	2.06	50.08	52.14	54.00	-1.86	Average	196	308	P
6	11490.00	2.06	63.90	65.96	74.00	-8.04	Peak	196	308	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 149	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

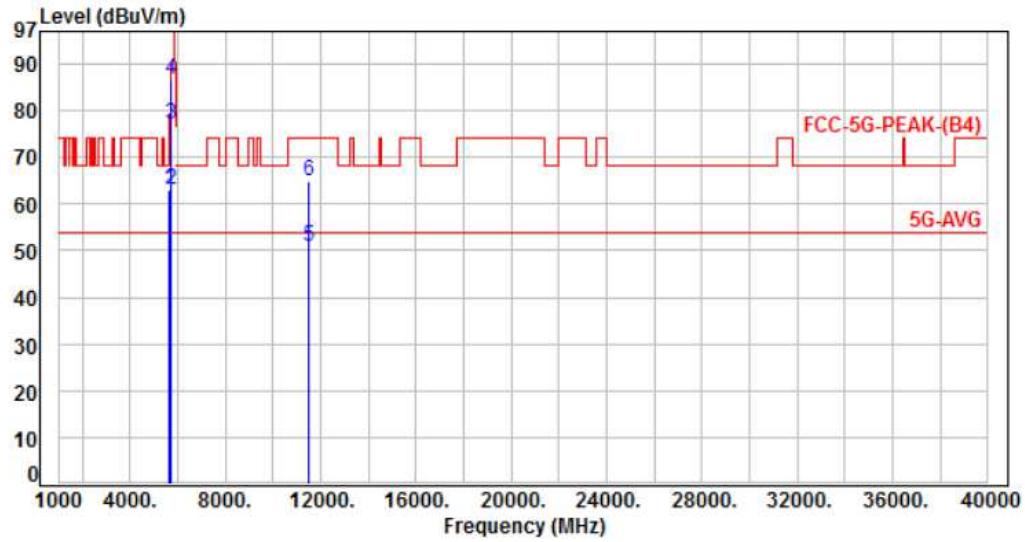


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	68.75	62.98	68.20	-5.22	Peak	122	270	P
2	5700.00	-5.79	68.71	62.92	105.20	-42.28	Peak	122	270	P
3	5720.00	-5.80	82.78	76.98	110.80	-33.82	Peak	122	270	P
4	5725.00	-5.80	92.50	86.70	122.20	-35.50	Peak	122	270	P
5	11490.00	2.06	48.94	51.00	54.00	-3.00	Average	100	277	P
6	11490.00	2.06	63.00	65.06	74.00	-8.94	Peak	100	277	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 157	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

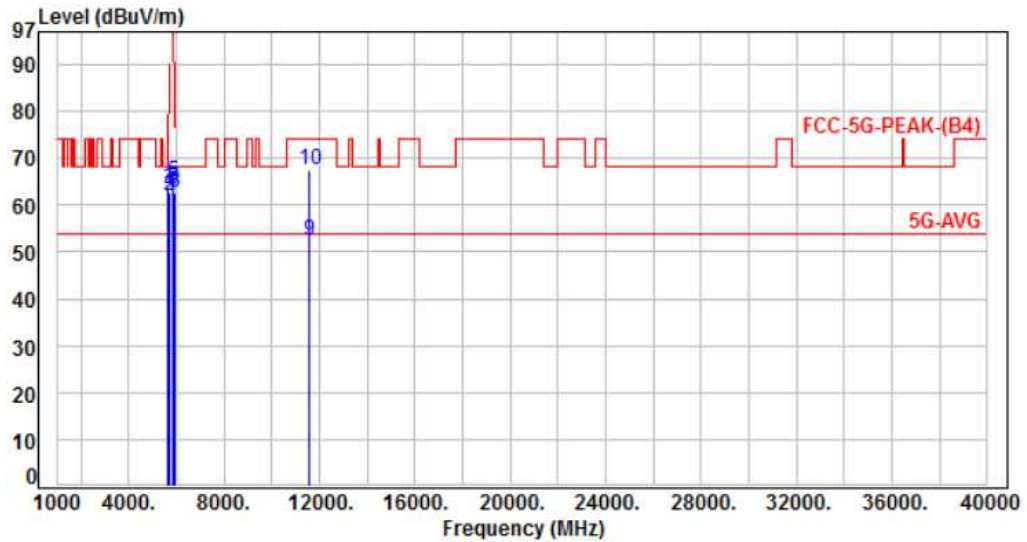


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	69.60	63.83	68.20	-4.37	Peak	100	298	P
2	5700.00	-5.79	67.57	61.78	105.20	-43.42	Peak	100	298	P
3	5720.00	-5.80	67.88	62.08	110.80	-48.72	Peak	100	298	P
4	5725.00	-5.80	68.38	62.58	122.20	-59.62	Peak	100	298	P
5	5850.00	-5.84	70.64	64.80	122.20	-57.40	Peak	100	298	P
6	5855.00	-5.84	69.36	63.52	110.80	-47.28	Peak	100	298	P
7	5875.00	-5.85	69.33	63.48	105.20	-41.72	Peak	100	298	P
8	5925.00	-5.87	68.72	62.85	68.20	-5.35	Peak	100	298	P
9	11570.00	2.09	50.11	52.20	54.00	-1.80	Average	190	310	P
10	11570.00	2.09	65.22	67.31	74.00	-6.69	Peak	190	310	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 157	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

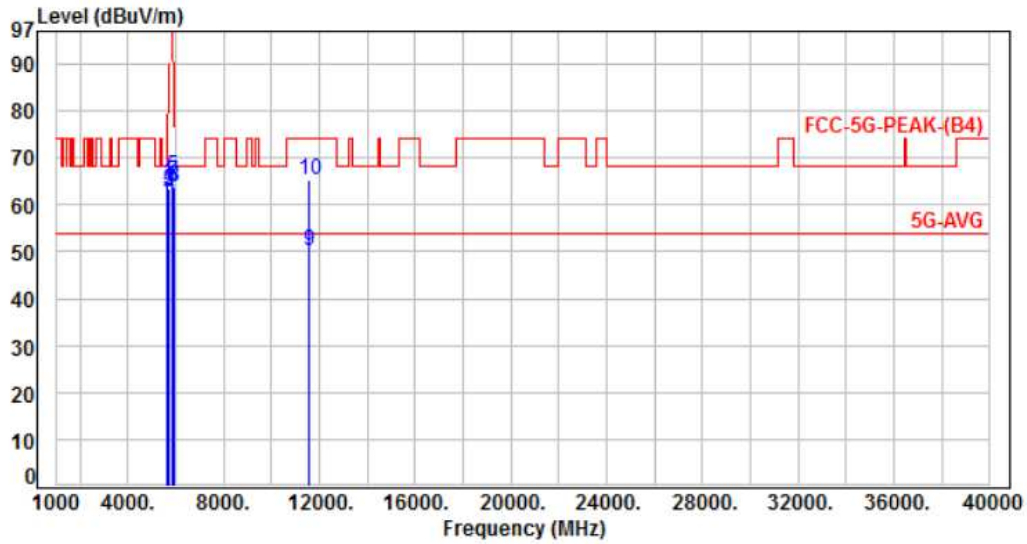


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	70.22	64.45	68.20	-3.75	Peak	118	338	P
2	5700.00	-5.79	68.43	62.64	105.20	-42.56	Peak	118	338	P
3	5720.00	-5.80	68.77	62.97	110.80	-47.83	Peak	118	338	P
4	5725.00	-5.80	69.17	63.37	122.20	-58.83	Peak	118	338	P
5	5850.00	-5.84	71.74	65.90	122.20	-56.30	Peak	118	338	P
6	5855.00	-5.84	69.78	63.94	110.80	-46.86	Peak	118	338	P
7	5875.00	-5.85	70.71	64.86	105.20	-40.34	Peak	118	338	P
8	5925.00	-5.87	69.65	63.78	68.20	-4.42	Peak	118	338	P
9	11570.00	2.09	48.03	50.12	54.00	-3.88	Average	166	77	P
10	11570.00	2.09	63.02	65.11	74.00	-8.89	Peak	166	77	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH 165	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

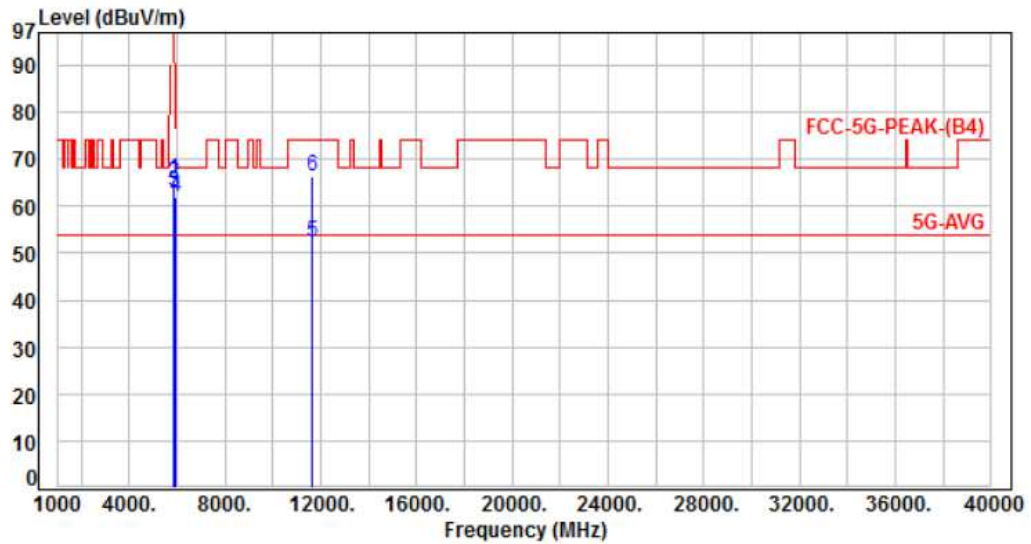


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	-5.84	71.54	65.70	122.20	-56.50	Peak	100	291	P
2	5855.00	-5.84	70.85	65.01	110.80	-45.79	Peak	100	291	P
3	5875.00	-5.85	68.85	63.00	105.20	-42.20	Peak	100	291	P
4	5925.00	-5.87	67.98	62.11	68.20	-6.09	Peak	100	291	P
5	11650.00	2.12	50.41	52.53	54.00	-1.47	Average	189	333	P
6	11650.00	2.12	64.45	66.57	74.00	-7.43	Peak	189	333	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH 165	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

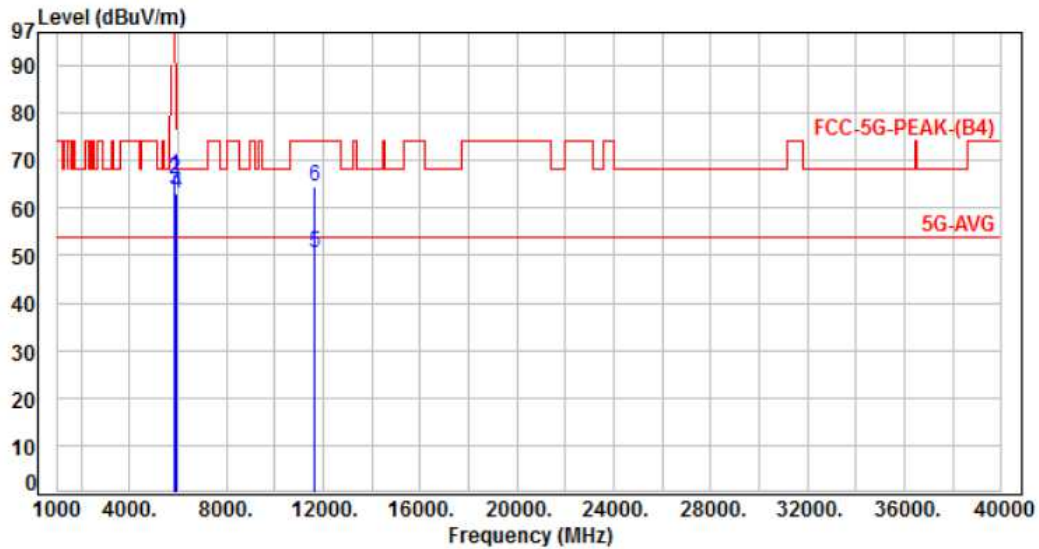


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	-5.84	72.60	66.76	122.20	-55.44	Peak	128	301	P
2	5855.00	-5.84	71.96	66.12	110.80	-44.68	Peak	128	301	P
3	5875.00	-5.85	69.67	63.82	105.20	-41.38	Peak	128	301	P
4	5925.00	-5.87	69.06	63.19	68.20	-5.01	Peak	128	301	P
5	11650.00	2.12	48.33	50.45	54.00	-3.55	Average	141	63	P
6	11650.00	2.12	62.37	64.49	74.00	-9.51	Peak	141	63	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH 36	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

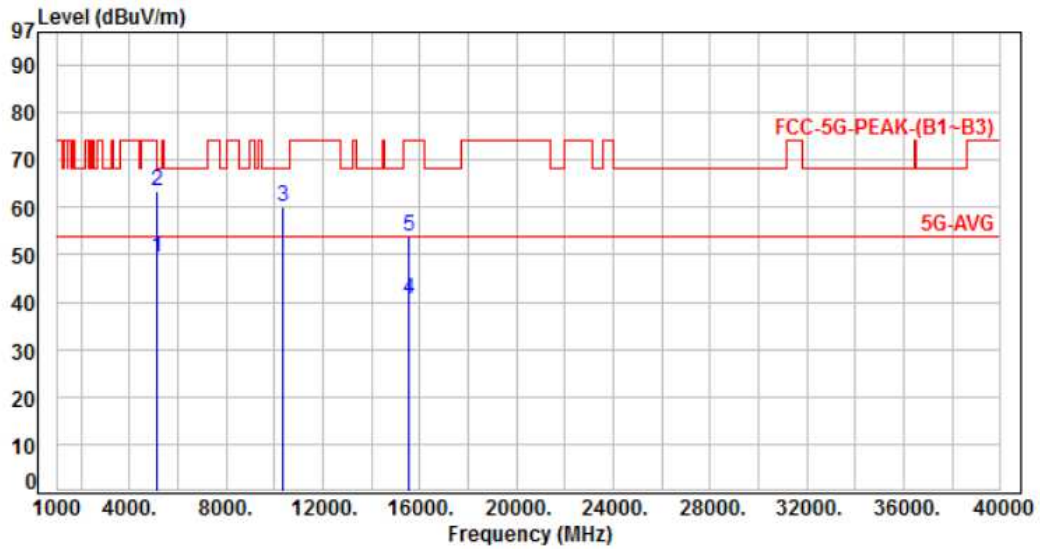


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	56.12	49.58	54.00	-4.42	Average	118	290	P
2	5150.00	-6.54	70.12	63.58	74.00	-10.42	Peak	118	290	P
3	10360.00	0.66	59.35	60.01	68.20	-8.19	Peak	140	321	P
4	15540.00	5.36	35.12	40.48	54.00	-13.52	Average	156	10	P
5	15540.00	5.36	48.34	53.70	74.00	-20.30	Peak	156	10	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH 36	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

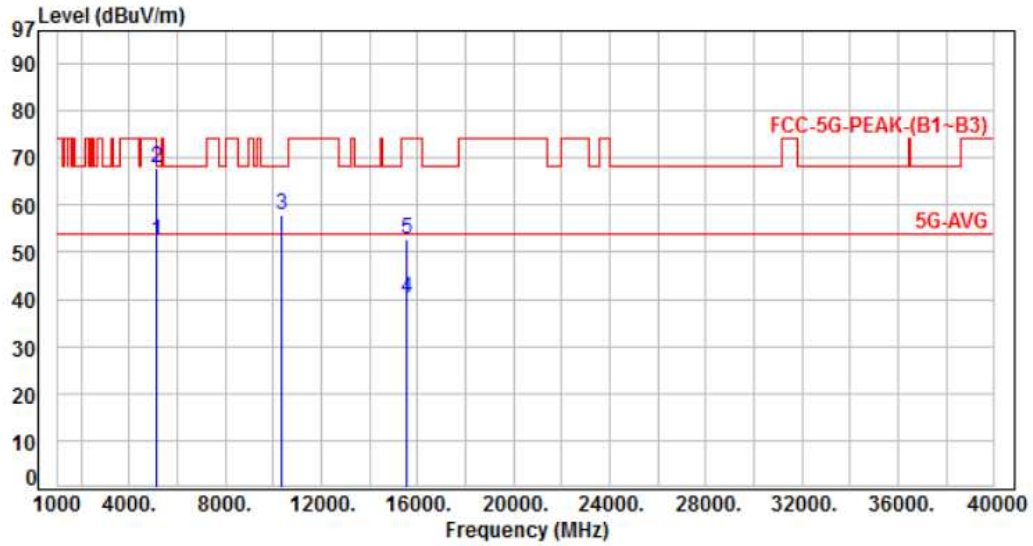


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	58.97	52.43	54.00	-1.57	Average	219	268	P
2	5150.00	-6.54	74.48	67.94	74.00	-6.06	Peak	219	268	P
3	10360.00	0.66	57.37	58.03	68.20	-10.17	Peak	184	261	P
4	15540.00	5.36	34.89	40.25	54.00	-13.75	Average	140	311	P
5	15540.00	5.36	47.22	52.58	74.00	-21.42	Peak	140	311	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH 44	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

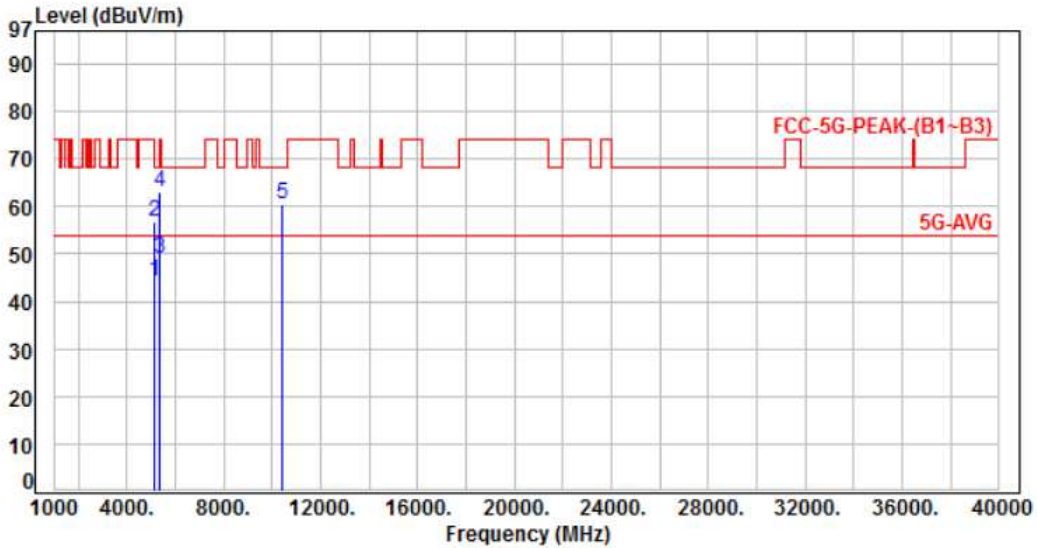


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	50.66	44.12	54.00	-9.88	Average	193	270	P
2	5150.00	-6.54	63.20	56.66	74.00	-17.34	Peak	193	270	P
3	5350.00	-6.06	55.25	49.19	54.00	-4.81	Average	193	270	P
4	5350.00	-6.06	68.96	62.90	74.00	-11.10	Peak	193	270	P
5	10440.00	0.70	59.82	60.52	68.20	-7.68	Peak	102	301	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH 44	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

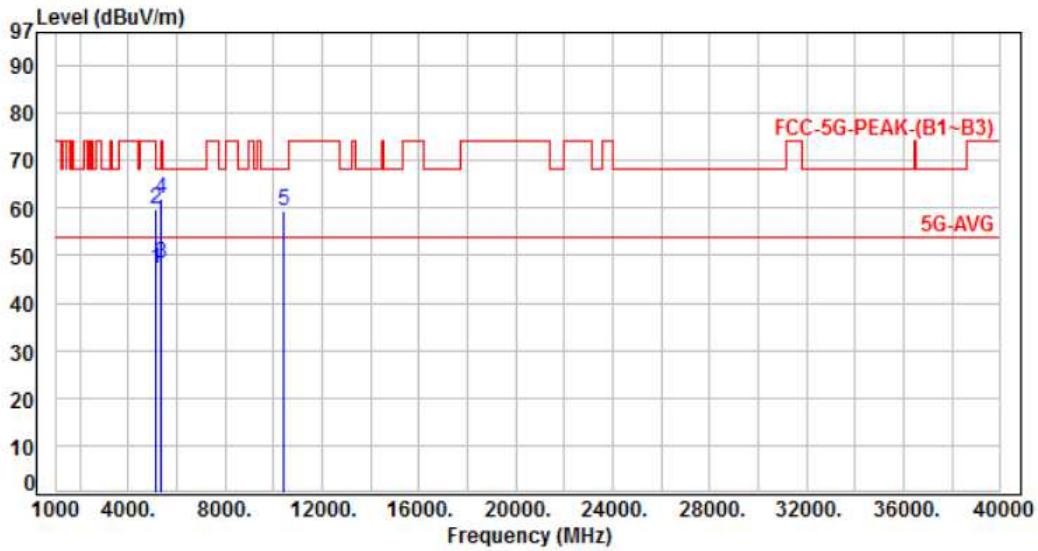


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	53.92	47.38	54.00	-6.62	Average	155	210	P
2	5150.00	-6.54	66.11	59.57	74.00	-14.43	Peak	155	210	P
3	5350.00	-6.06	54.50	48.44	54.00	-5.56	Average	155	210	P
4	5350.00	-6.06	68.05	61.99	74.00	-12.01	Peak	155	210	P
5	10440.00	0.70	58.69	59.39	68.20	-8.81	Peak	144	294	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH 48	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

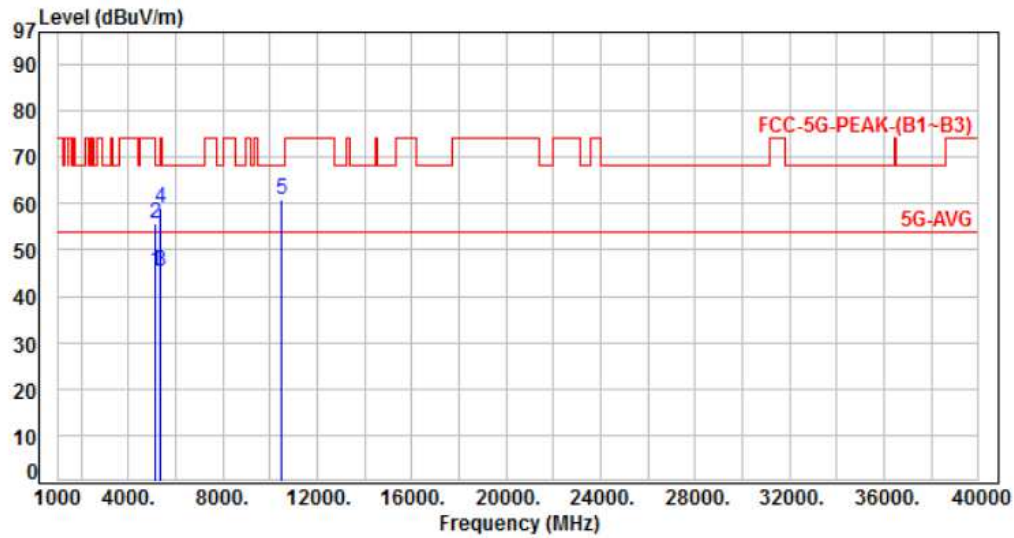


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	51.79	45.25	54.00	-8.75	Average	202	255	P
2	5150.00	-6.54	62.18	55.64	74.00	-18.36	Peak	202	255	P
3	5350.00	-6.06	51.27	45.21	54.00	-8.79	Average	202	255	P
4	5350.00	-6.06	64.90	58.84	74.00	-15.16	Peak	202	255	P
5	10480.00	0.73	60.21	60.94	68.20	-7.26	Peak	100	278	P

Note: Level = Reading + Factor  
Margin = Level - Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH 48	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

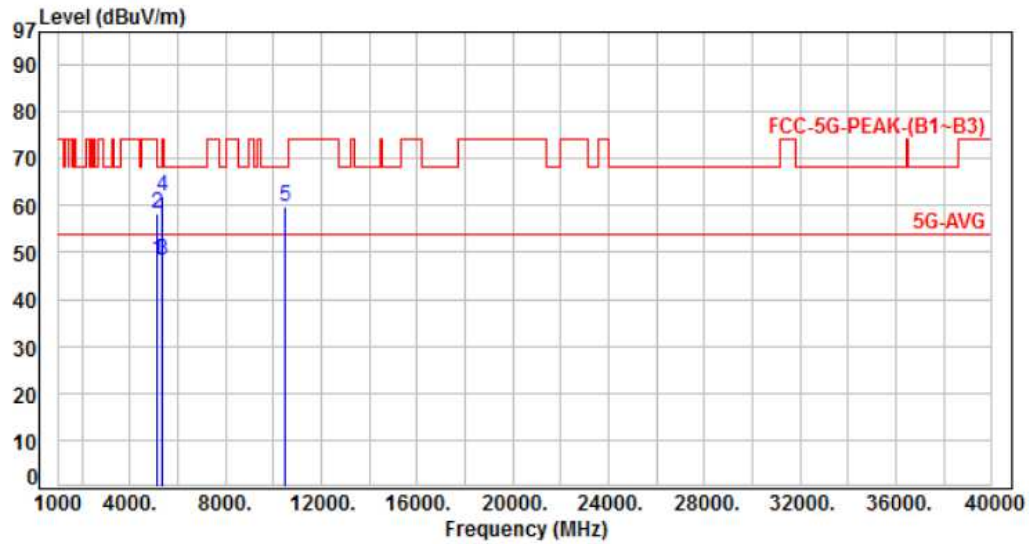


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	54.68	48.14	54.00	-5.86	Average	157	182	P
2	5150.00	-6.54	64.71	58.17	74.00	-15.83	Peak	157	182	P
3	5350.00	-6.06	54.37	48.31	54.00	-5.69	Average	157	182	P
4	5350.00	-6.06	67.97	61.91	74.00	-12.09	Peak	157	182	P
5	10480.00	0.73	59.16	59.89	68.20	-8.31	Peak	109	92	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH 149	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

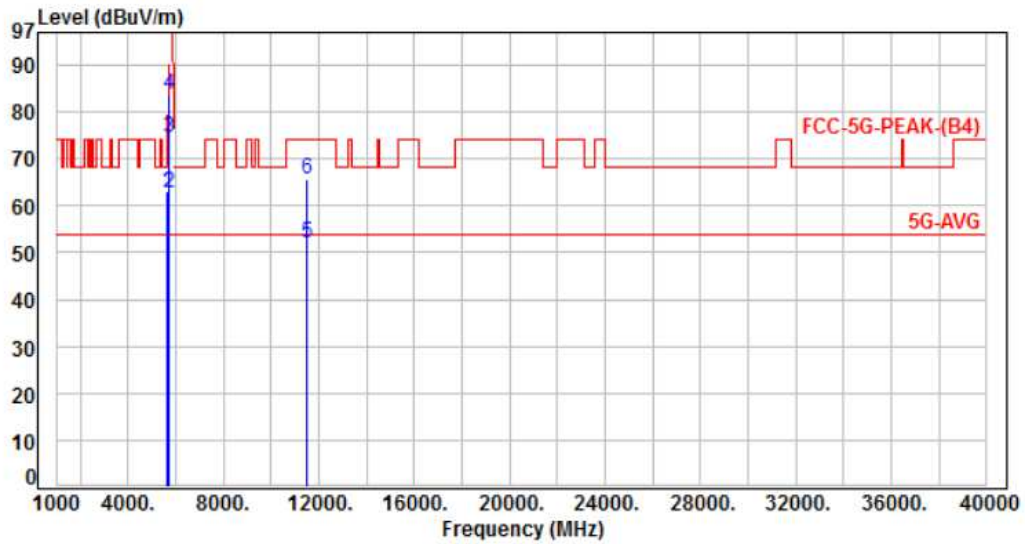


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	68.79	63.02	68.20	-5.18	Peak	100	286	P
2	5700.00	-5.79	68.31	62.52	105.20	-42.68	Peak	100	286	P
3	5720.00	-5.80	80.13	74.33	110.80	-36.47	Peak	100	286	P
4	5725.00	-5.80	89.44	83.64	122.20	-38.56	Peak	100	286	P
5	11490.00	2.06	49.98	52.04	54.00	-1.96	Average	195	311	P
6	11490.00	2.06	63.77	65.83	74.00	-8.17	Peak	195	311	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH 149	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

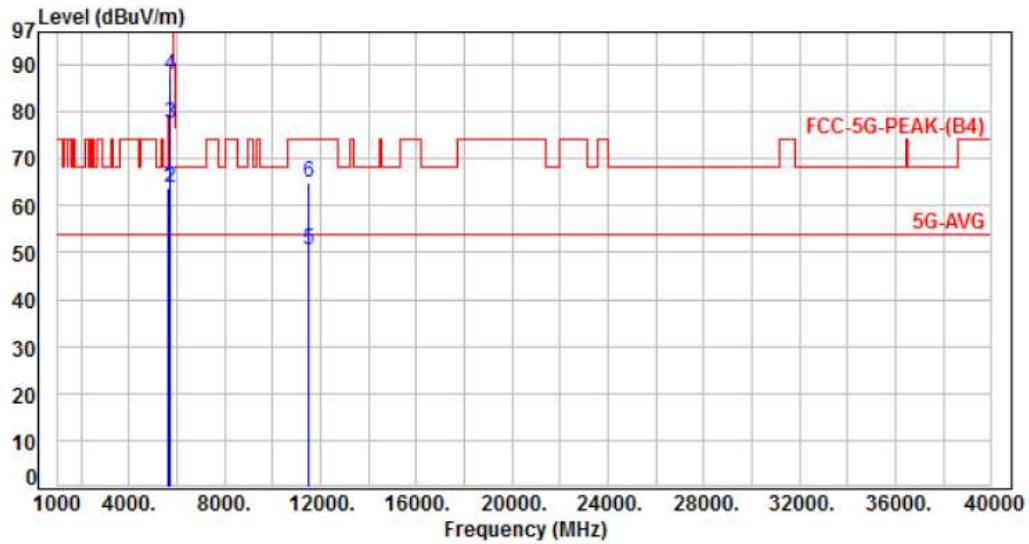


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	69.61	63.84	68.20	-4.36	Peak	109	177	P
2	5700.00	-5.79	69.54	63.75	105.20	-41.45	Peak	109	177	P
3	5720.00	-5.80	83.34	77.54	110.80	-33.26	Peak	109	177	P
4	5725.00	-5.80	93.41	87.61	122.20	-34.59	Peak	109	177	P
5	11490.00	2.06	48.59	50.65	54.00	-3.35	Average	115	174	P
6	11490.00	2.06	62.87	64.93	74.00	-9.07	Peak	115	174	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH 157	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

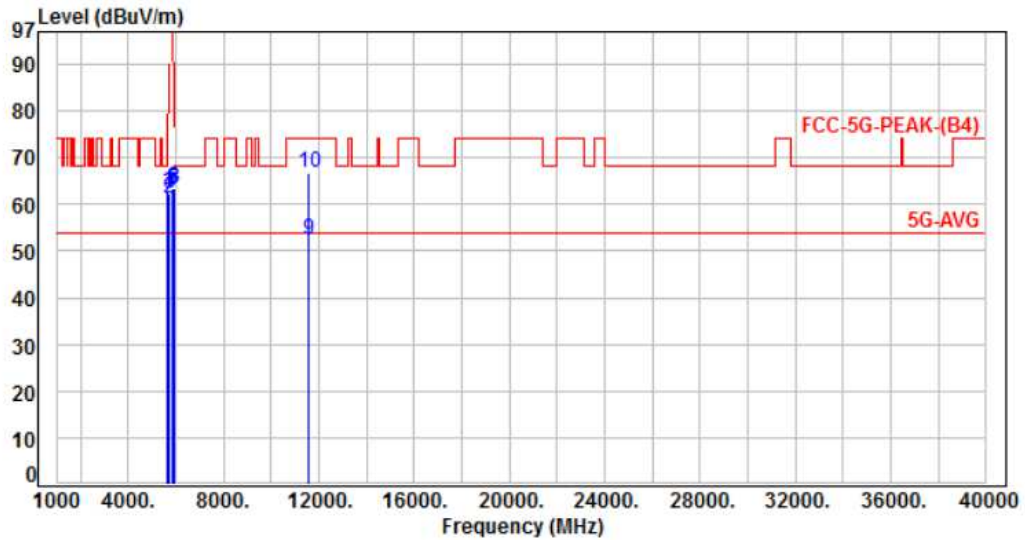


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	68.48	62.71	68.20	-5.49	Peak	100	288	P
2	5700.00	-5.79	67.13	61.34	105.20	-43.86	Peak	100	288	P
3	5720.00	-5.80	68.20	62.40	110.80	-48.40	Peak	100	288	P
4	5725.00	-5.80	68.27	62.47	122.20	-59.73	Peak	100	288	P
5	5850.00	-5.84	68.76	62.92	122.20	-59.28	Peak	100	288	P
6	5855.00	-5.84	69.27	63.43	110.80	-47.37	Peak	100	288	P
7	5875.00	-5.85	68.13	62.28	105.20	-42.92	Peak	100	288	P
8	5925.00	-5.87	69.24	63.37	68.20	-4.83	Peak	100	288	P
9	11570.00	2.09	50.19	52.28	54.00	-1.72	Average	202	333	P
10	11570.00	2.09	64.80	66.89	74.00	-7.11	Peak	202	333	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH 157	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

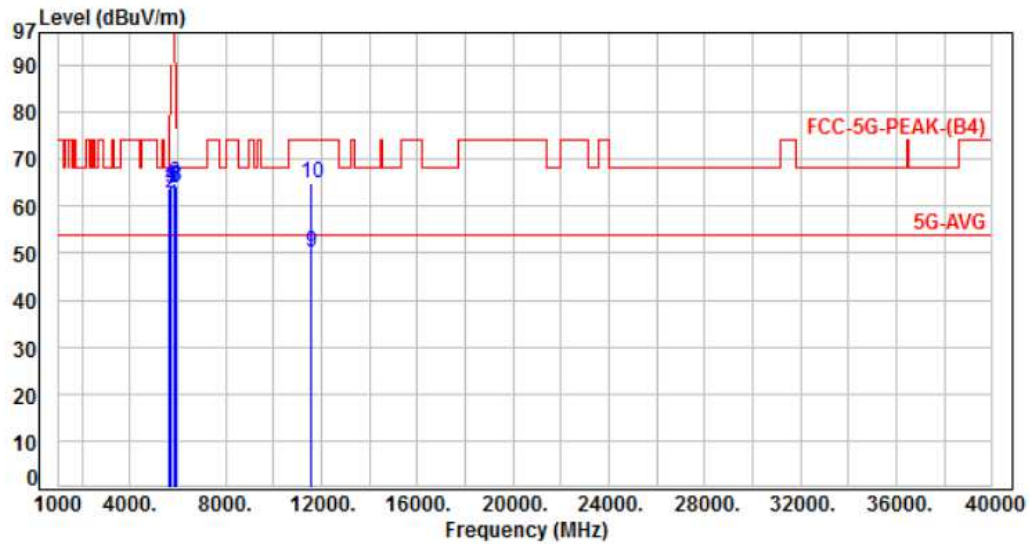


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	69.70	63.93	68.20	-4.27	Peak	118	210	P
2	5700.00	-5.79	68.37	62.58	105.20	-42.62	Peak	118	210	P
3	5720.00	-5.80	69.50	63.70	110.80	-47.10	Peak	118	210	P
4	5725.00	-5.80	69.97	64.17	122.20	-58.03	Peak	118	210	P
5	5850.00	-5.84	69.73	63.89	122.20	-58.31	Peak	118	210	P
6	5855.00	-5.84	70.69	64.85	110.80	-45.95	Peak	118	210	P
7	5875.00	-5.85	69.52	63.67	105.20	-41.53	Peak	118	210	P
8	5925.00	-5.87	70.06	64.19	68.20	-4.01	Peak	118	210	P
9	11570.00	2.09	48.09	50.18	54.00	-3.82	Average	155	28	P
10	11570.00	2.09	62.64	64.73	74.00	-9.27	Peak	155	28	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH 165	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

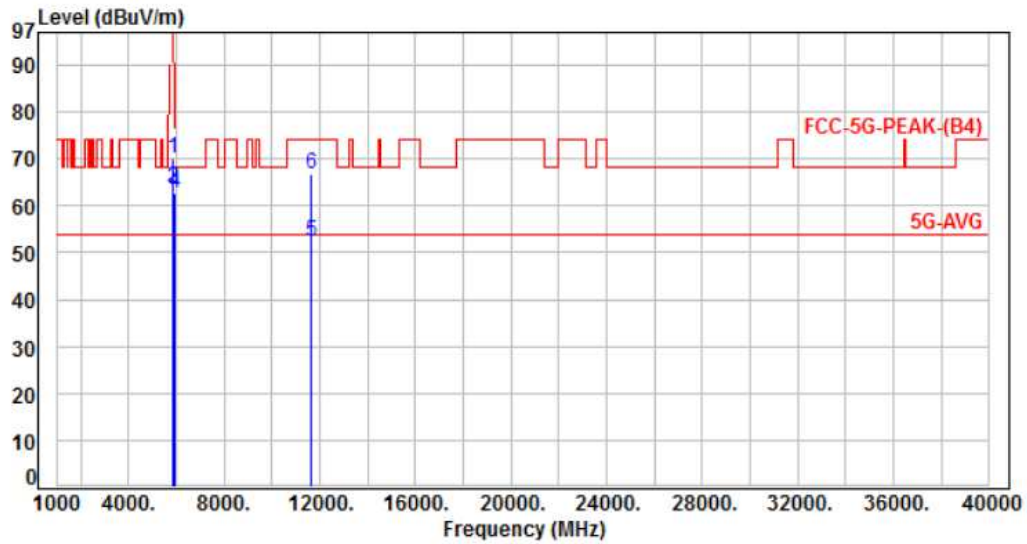


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	-5.84	75.96	70.12	122.20	-52.08	Peak	100	291	P
2	5855.00	-5.84	69.82	63.98	110.80	-46.82	Peak	100	291	P
3	5875.00	-5.85	69.60	63.75	105.20	-41.45	Peak	100	291	P
4	5925.00	-5.87	68.52	62.65	68.20	-5.55	Peak	100	291	P
5	11650.00	2.12	50.18	52.30	54.00	-1.70	Average	189	334	P
6	11650.00	2.12	64.73	66.85	74.00	-7.15	Peak	189	334	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH 165	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

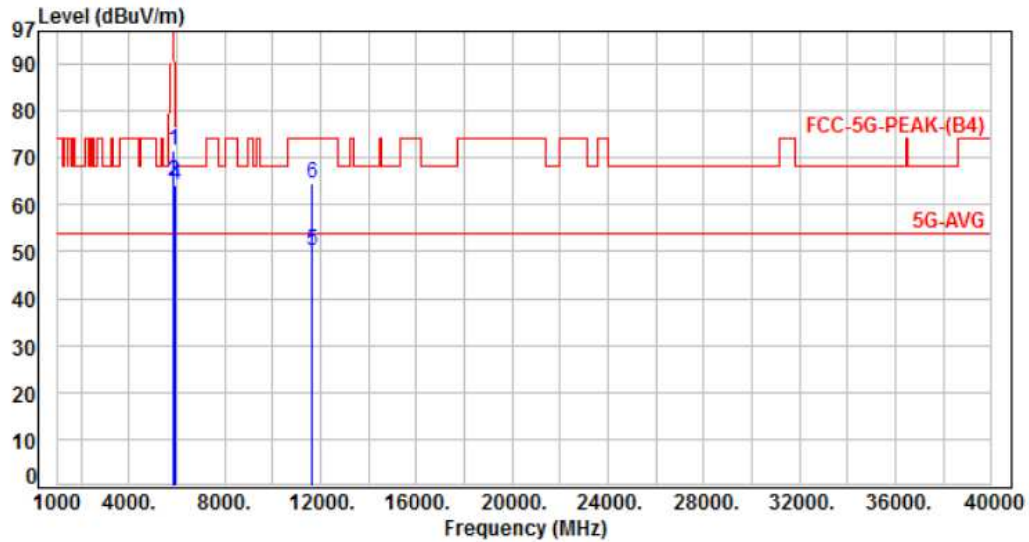


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	-5.84	77.54	71.70	122.20	-50.50	Peak	109	188	P
2	5855.00	-5.84	70.84	65.00	110.80	-45.80	Peak	109	188	P
3	5875.00	-5.85	70.66	64.81	105.20	-40.39	Peak	109	188	P
4	5925.00	-5.87	70.02	64.15	68.20	-4.05	Peak	109	188	P
5	11650.00	2.12	47.89	50.01	54.00	-3.99	Average	121	291	P
6	11650.00	2.12	62.47	64.59	74.00	-9.41	Peak	121	291	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, CH 38	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

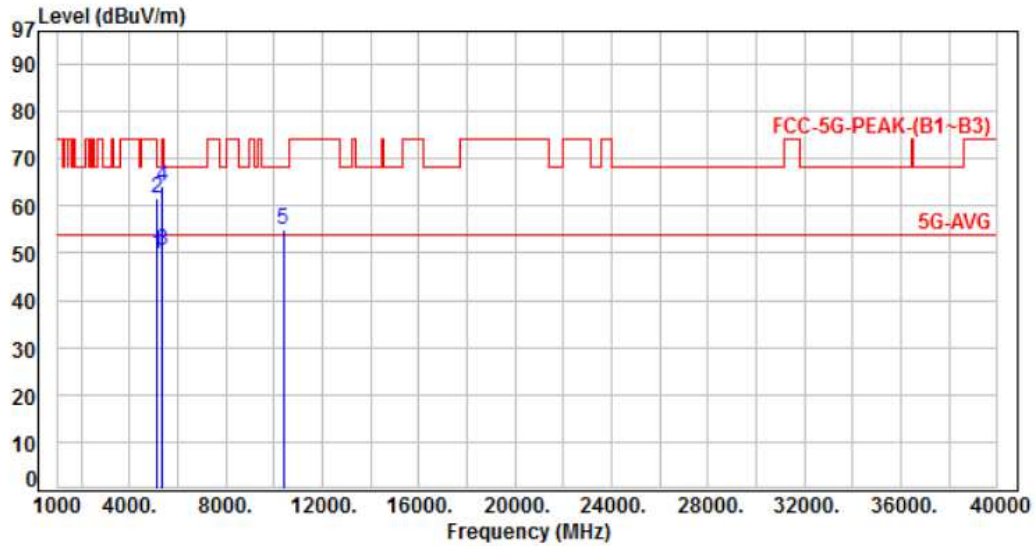


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	56.17	49.63	54.00	-4.37	Average	148	314	P
2	5150.00	-6.54	68.15	61.61	74.00	-12.39	Peak	148	314	P
3	5350.00	-6.06	56.72	50.66	54.00	-3.34	Average	148	314	P
4	5350.00	-6.06	70.25	64.19	74.00	-9.81	Peak	148	314	P
5	10380.00	0.68	54.21	54.89	68.20	-13.31	Peak	136	321	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, CH 38	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

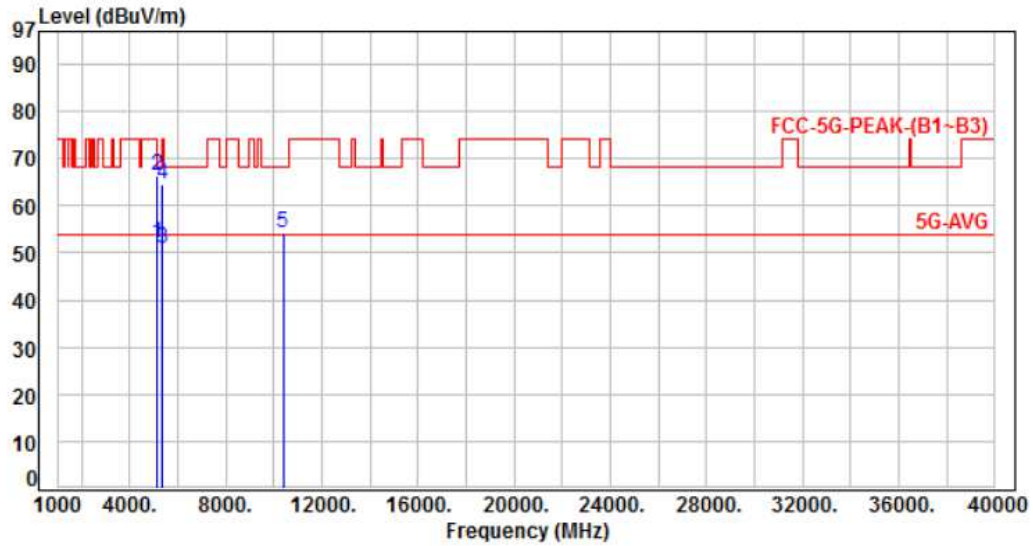


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	58.59	52.05	54.00	-1.95	Average	174	266	P
2	5150.00	-6.54	72.75	66.21	74.00	-7.79	Peak	174	266	P
3	5350.00	-6.06	56.93	50.87	54.00	-3.13	Average	174	266	P
4	5350.00	-6.06	70.47	64.41	74.00	-9.59	Peak	174	266	P
5	10380.00	0.68	53.40	54.08	68.20	-14.12	Peak	183	267	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, CH 46	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

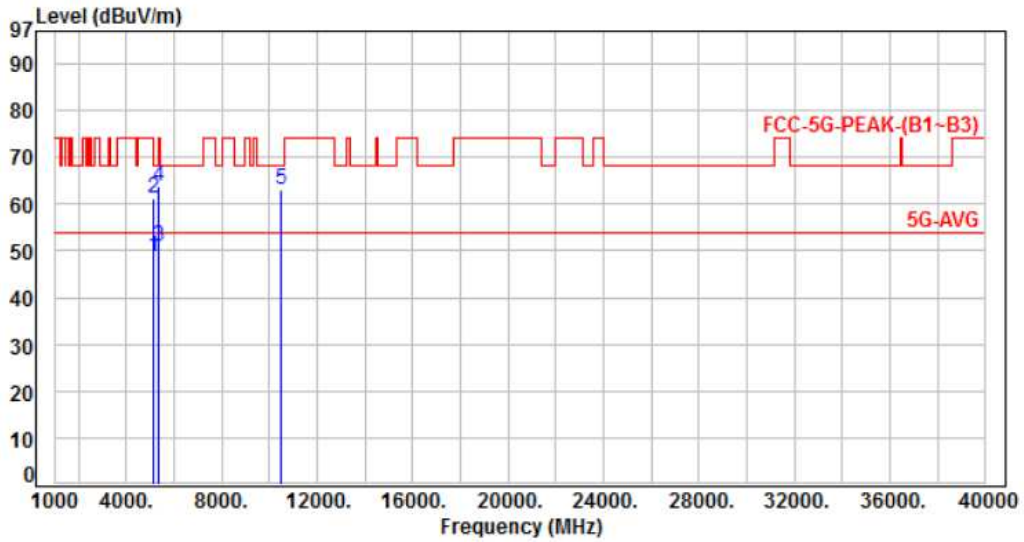


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	55.40	48.86	54.00	-5.14	Average	218	266	P
2	5150.00	-6.54	67.66	61.12	74.00	-12.88	Peak	218	266	P
3	5350.00	-6.06	56.82	50.76	54.00	-3.24	Average	218	266	P
4	5350.00	-6.06	69.74	63.68	74.00	-10.32	Peak	218	266	P
5	10460.00	0.72	62.20	62.92	68.20	-5.28	Peak	100	287	P

Note: Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, CH 46	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

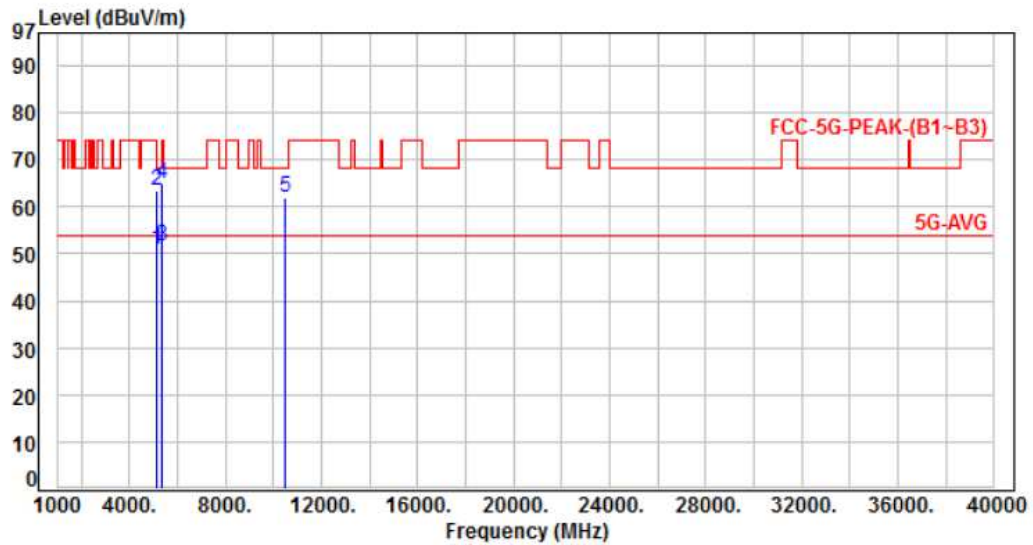


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	57.48	50.94	54.00	-3.06	Average	177	161	P
2	5150.00	-6.54	70.08	63.54	74.00	-10.46	Peak	177	161	P
3	5350.00	-6.06	57.65	51.59	54.00	-2.41	Average	177	161	P
4	5350.00	-6.06	71.01	64.95	74.00	-9.05	Peak	177	161	P
5	10460.00	0.72	61.15	61.87	68.20	-6.33	Peak	109	96	P

Note: Level = Reading + Factor  
 Margin = Level - Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, CH 151	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

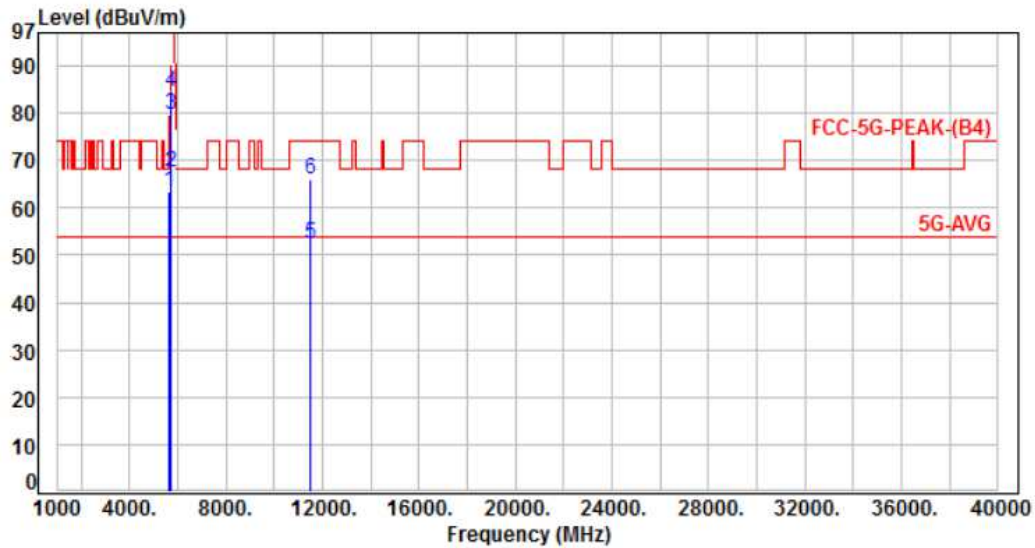


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	69.02	63.25	68.20	-4.95	Peak	100	296	P
2	5700.00	-5.79	73.24	67.45	105.20	-37.75	Peak	100	296	P
3	5720.00	-5.80	85.41	79.61	110.80	-31.19	Peak	100	296	P
4	5725.00	-5.80	90.08	84.28	122.20	-37.92	Peak	100	296	P
5	11510.00	2.07	50.18	52.25	54.00	-1.75	Average	170	309	P
6	11510.00	2.07	63.87	65.94	74.00	-8.06	Peak	170	309	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, CH 151	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

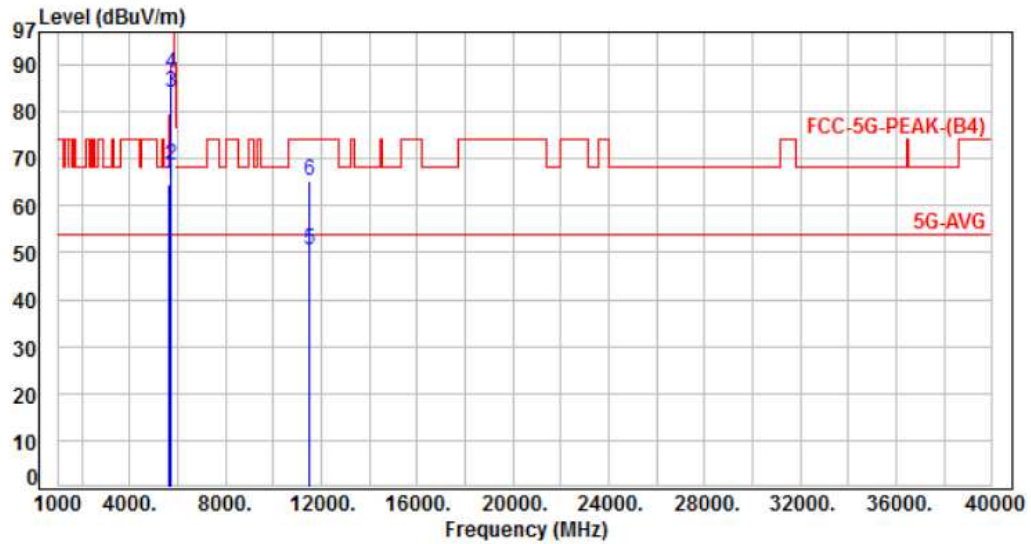


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	70.40	64.63	68.20	-3.57	Peak	122	267	P
2	5700.00	-5.79	74.47	68.68	105.20	-36.52	Peak	122	267	P
3	5720.00	-5.80	89.94	84.14	110.80	-26.66	Peak	122	267	P
4	5725.00	-5.80	93.99	88.19	122.20	-34.01	Peak	122	267	P
5	11510.00	2.07	48.59	50.66	54.00	-3.34	Average	100	213	P
6	11510.00	2.07	63.31	65.38	74.00	-8.62	Peak	100	213	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 5, CH 159	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

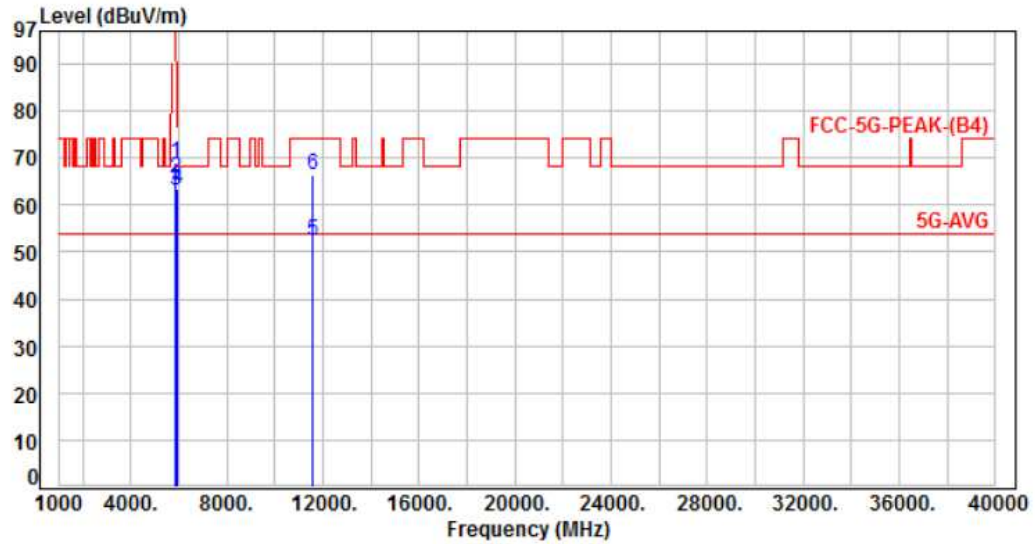


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	-5.84	74.78	68.94	122.20	-53.26	Peak	102	298	P
2	5855.00	-5.84	71.63	65.79	110.80	-45.01	Peak	102	298	P
3	5875.00	-5.85	69.10	63.25	105.20	-41.95	Peak	102	298	P
4	5925.00	-5.87	69.25	63.38	68.20	-4.82	Peak	102	298	P
5	11590.00	2.10	50.16	52.26	54.00	-1.74	Average	169	330	P
6	11590.00	2.10	64.18	66.28	74.00	-7.72	Peak	169	330	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 5, CH 159	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

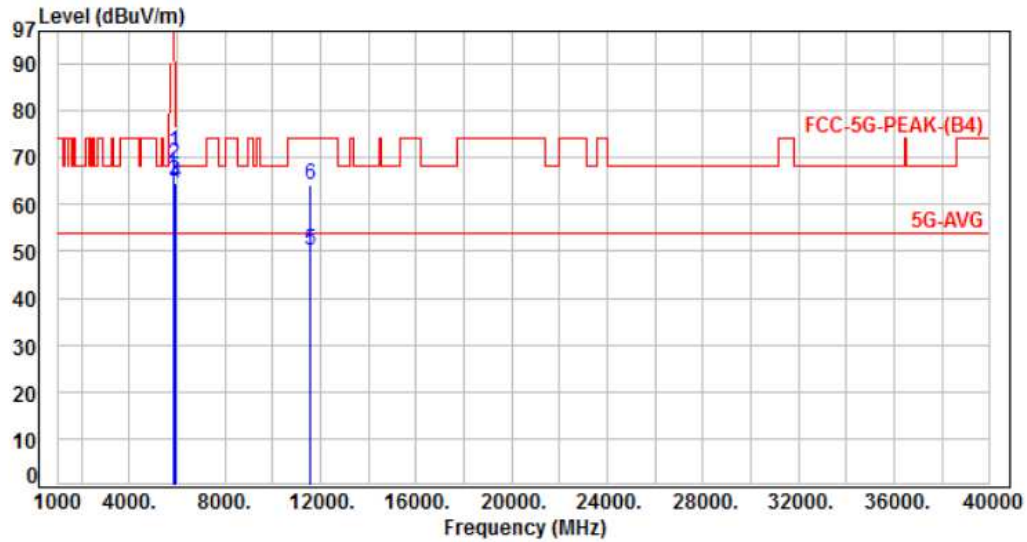


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	-5.84	77.09	71.25	122.20	-50.95	Peak	112	159	P
2	5855.00	-5.84	74.40	68.56	110.80	-42.24	Peak	112	159	P
3	5875.00	-5.85	70.69	64.84	105.20	-40.36	Peak	112	159	P
4	5925.00	-5.87	70.51	64.64	68.20	-3.56	Peak	112	159	P
5	11590.00	2.10	48.06	50.16	54.00	-3.84	Average	155	280	P
6	11590.00	2.10	62.04	64.14	74.00	-9.86	Peak	155	280	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, CH 42	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

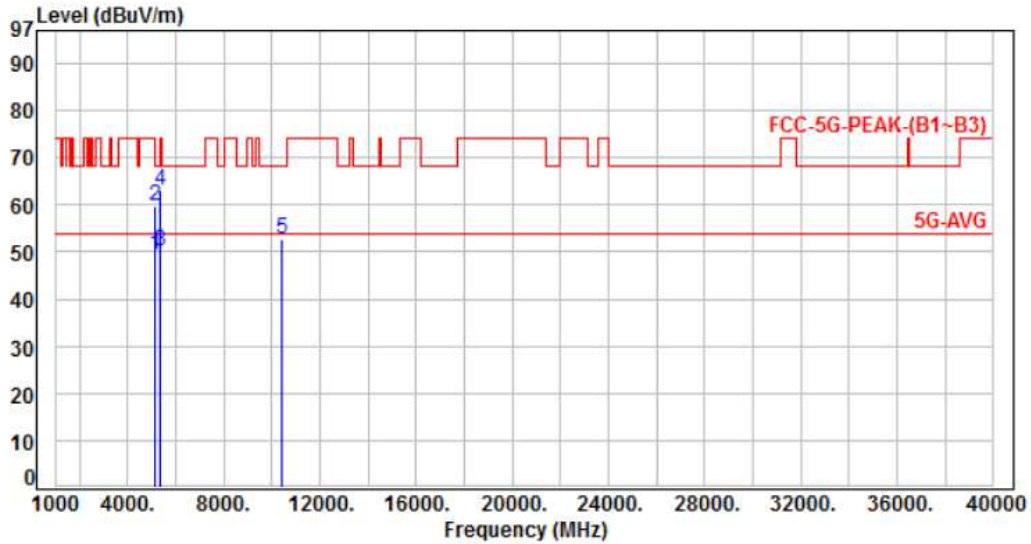


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	56.13	49.59	54.00	-4.41	Average	115	216	P
2	5150.00	-6.54	66.27	59.73	74.00	-14.27	Peak	115	216	P
3	5350.00	-6.06	56.29	50.23	54.00	-3.77	Average	115	216	P
4	5350.00	-6.06	69.31	63.25	74.00	-10.75	Peak	115	216	P
5	10420.00	0.69	52.16	52.85	68.20	-15.35	Peak	124	303	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, CH 42	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

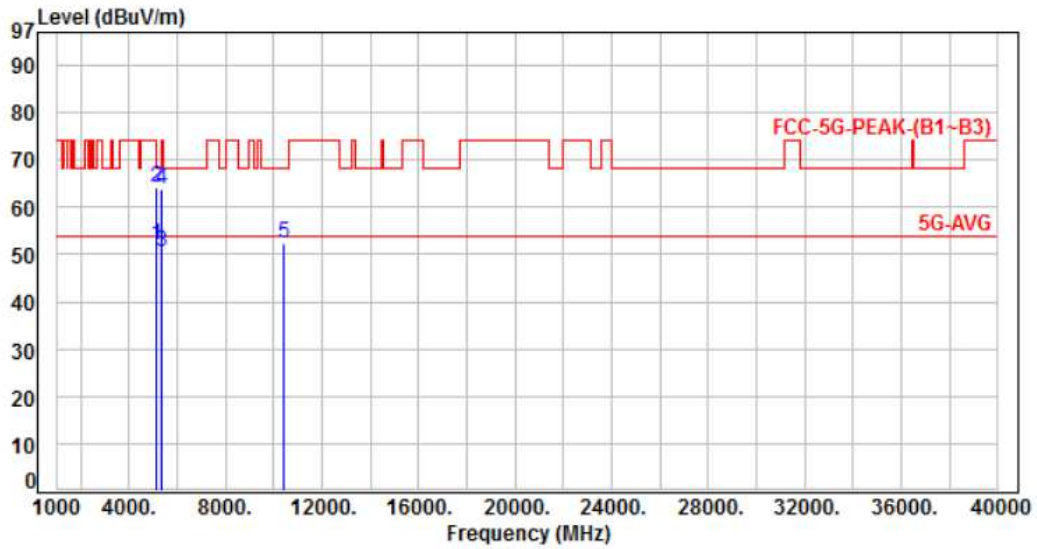


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	-6.54	58.62	52.08	54.00	-1.92	Average	218	266	P
2	5150.00	-6.54	70.74	64.20	74.00	-9.80	Peak	218	266	P
3	5350.00	-6.06	56.71	50.65	54.00	-3.35	Average	218	266	P
4	5350.00	-6.06	69.72	63.66	74.00	-10.34	Peak	218	266	P
5	10420.00	0.69	51.59	52.28	68.20	-15.92	Peak	100	279	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 6, CH 155	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

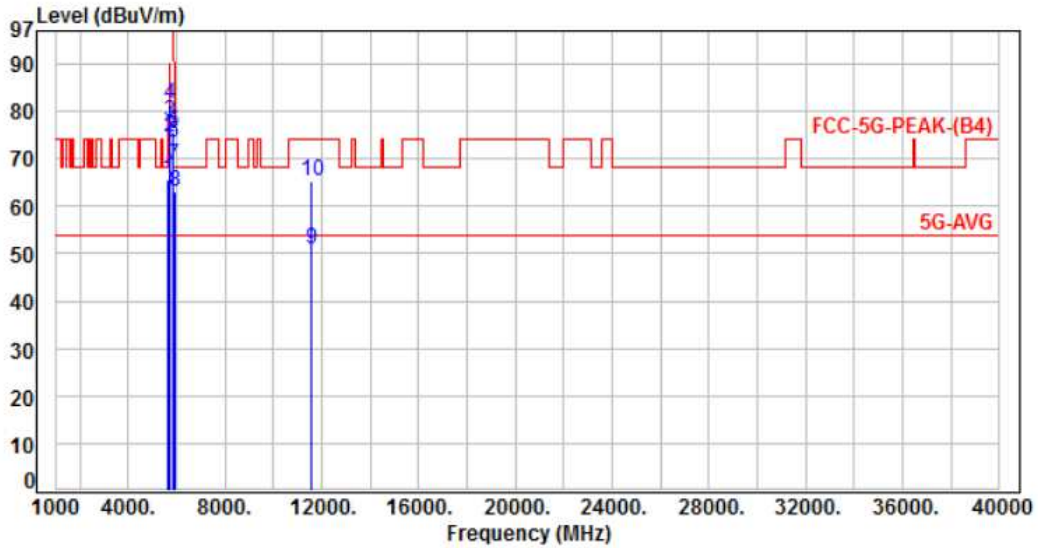


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	71.32	65.55	68.20	-2.65	Peak	100	295	P
2	5700.00	-5.79	80.42	74.63	105.20	-30.57	Peak	100	295	P
3	5720.00	-5.80	83.45	77.65	110.80	-33.15	Peak	100	295	P
4	5725.00	-5.80	87.13	81.33	122.20	-40.87	Peak	100	295	P
5	5850.00	-5.84	81.38	75.54	122.20	-46.66	Peak	100	295	P
6	5855.00	-5.84	79.15	73.31	110.80	-37.49	Peak	100	295	P
7	5875.00	-5.85	74.41	68.56	105.20	-36.64	Peak	100	295	P
8	5925.00	-5.87	69.03	63.16	68.20	-5.04	Peak	100	295	P
9	11550.00	2.09	48.96	51.05	54.00	-2.95	Average	164	330	P
10	11550.00	2.09	63.35	65.44	74.00	-8.56	Peak	164	330	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 6, CH 155	Temperature	: 25 °C
Test Date	: Dec. 01, 2016	Humidity	: 63 %

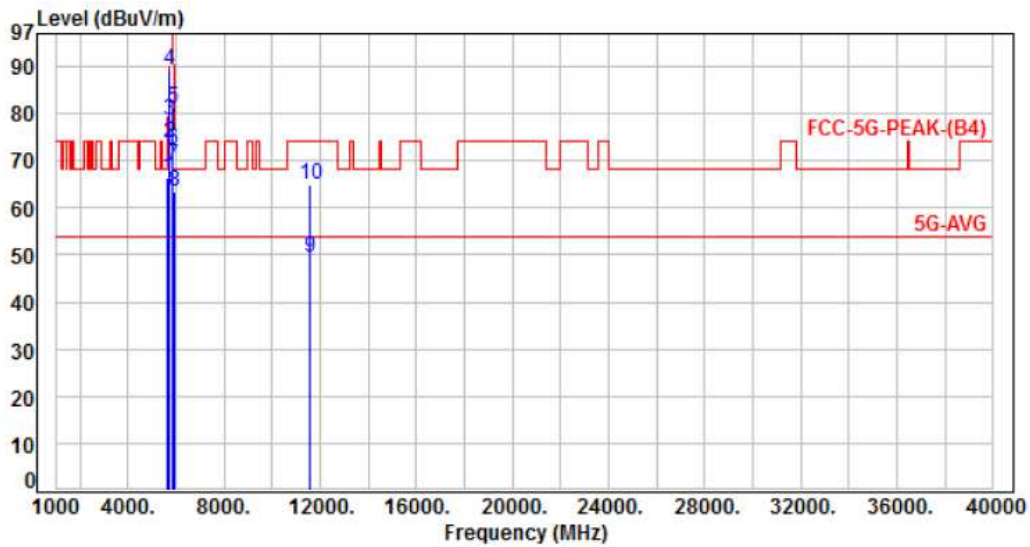

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	-5.77	72.07	66.30	68.20	-1.90	Peak	131	265	P
2	5700.00	-5.79	79.42	73.63	105.20	-31.57	Peak	131	265	P
3	5720.00	-5.80	84.40	78.60	110.80	-32.20	Peak	131	265	P
4	5725.00	-5.80	94.98	89.18	122.20	-33.02	Peak	131	265	P
5	5850.00	-5.84	86.96	81.12	122.20	-41.08	Peak	131	265	P
6	5855.00	-5.84	78.27	72.43	110.80	-38.37	Peak	131	265	P
7	5875.00	-5.85	74.85	69.00	105.20	-36.20	Peak	131	265	P
8	5925.00	-5.87	69.26	63.39	68.20	-4.81	Peak	131	265	P
9	11550.00	2.09	47.45	49.54	54.00	-4.46	Average	100	302	P
10	11550.00	2.09	62.73	64.82	74.00	-9.18	Peak	100	302	P

Note: Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss - Amplifier Factor



### 6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 7. On Time, Duty Cycle and Measurement methods


### 7.1. Test Limit

None; for reporting purposes only.

### 7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

### 7.3. Test Setup Layout



### 7.4. Test Result and Data

Test Date : Dec. 12, 2016  
 Temperature : 24°C  
 Humidity : 60%

Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)	1/T Minimum VBW(Hz)	Duty Cycle correction Factor (dB)
802.11a	100.00	100.00	100.00%	10.00	0.00
802.11ac VHT20	100.00	100.00	100.00%	10.00	0.00
802.11ac VHT40	100.00	100.00	100.00%	10.00	0.00
802.11ac VHT80	100.00	100.00	100.00%	10.00	0.00

### 7.5. Measurement Methods

26 dB and 6dB Emission BW	KDB 789033 D02 v01, Section C
99% Occupied BW	KDB 789033 D02 v01, Section D
Conducted Output Power	KDB 789033 D02 v01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v01, Sections G and H



### 8. 6dB Bandwidth

#### 8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW >= 3 x RBW, peak detector and max hold.

#### 8.3. Test Setup Layout



#### 8.4. Test Result and Data

Test Date : Dec. 12, 2016  
 Temperature : 24°C  
 Humidity : 60%


##### In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)
			ANT 1	ANT 2	ANT 3	
802.11a	149	5745	16.30	16.30	16.30	0.50
	157	5785	16.40	16.30	16.50	0.50
	165	5825	16.30	16.40	16.30	0.50
802.11ac VHT20	149	5745	17.60	17.60	17.60	0.50
	157	5785	17.60	17.60	17.60	0.50
	165	5825	17.70	17.70	17.70	0.50
802.11ac VHT40	151	5755	36.40	36.40	36.40	0.50
	159	5795	36.40	36.40	35.80	0.50
802.11ac VHT80	155	5775	75.20	76.80	76.48	0.50




Antenna 1


Modulation Standard: 802.11a (6Mbps)  
CH149

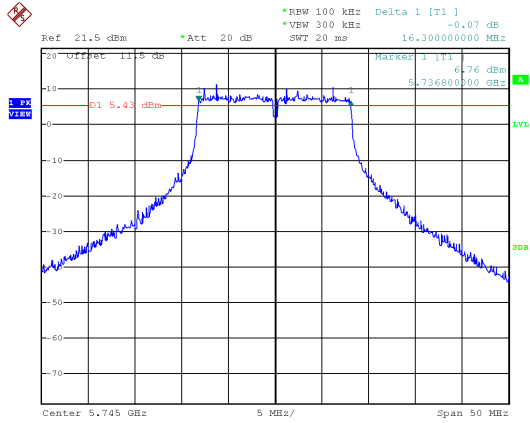


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH149

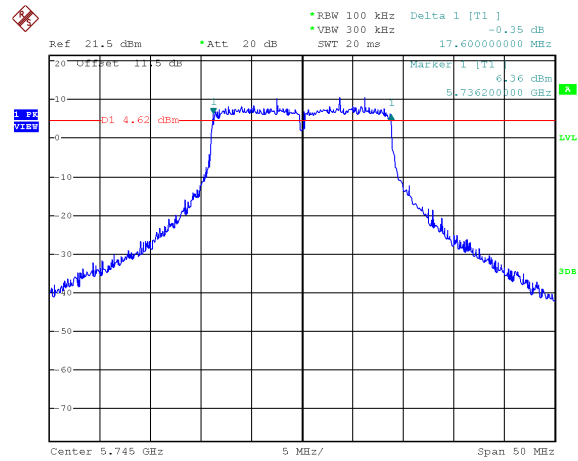


CH157

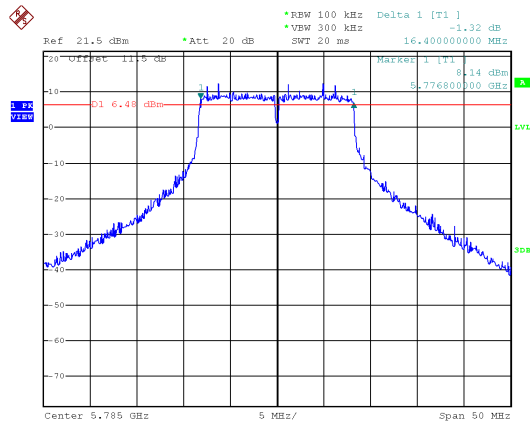


CH157

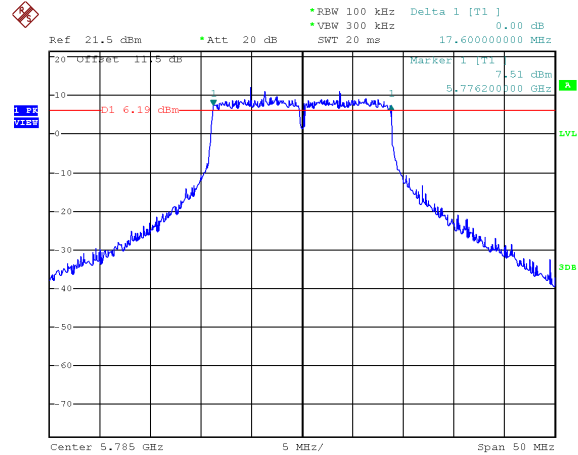

CH165

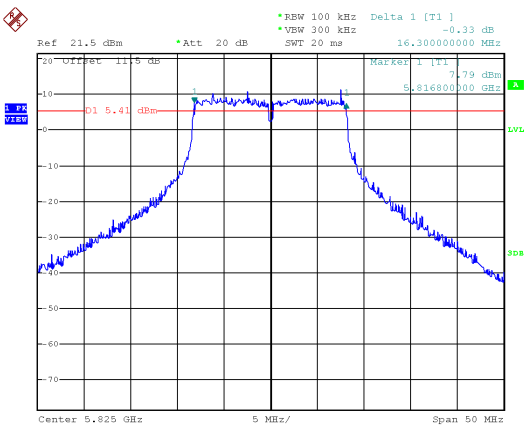


CH165

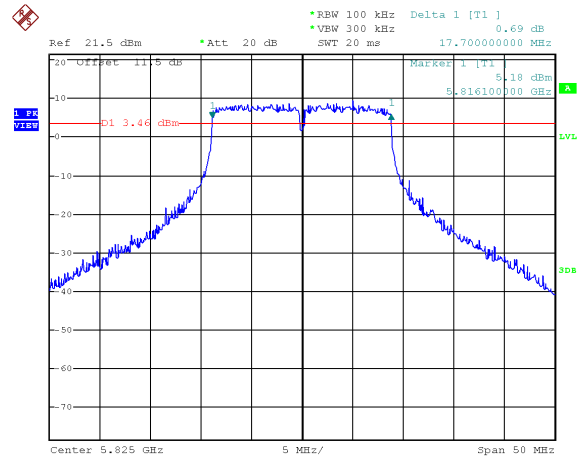




Antenna 1


Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH151

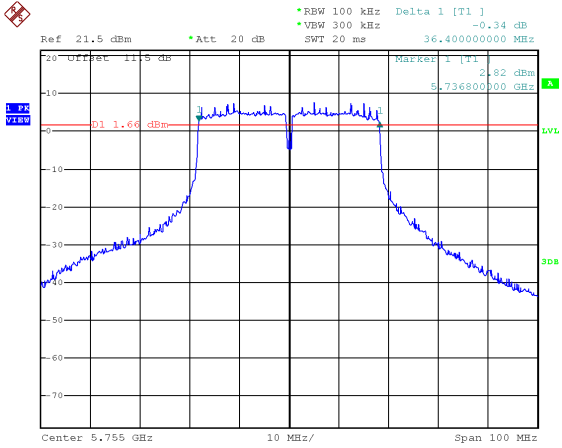

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH155

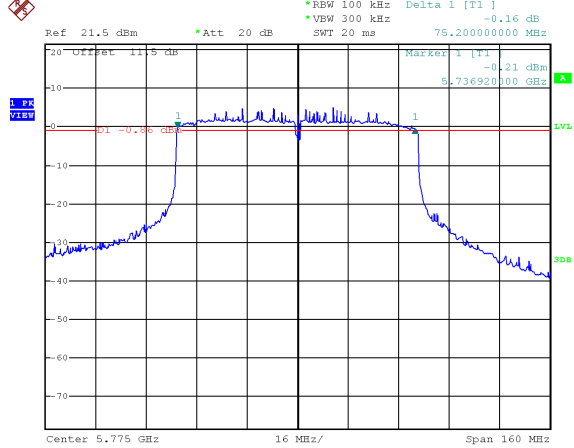

CH159

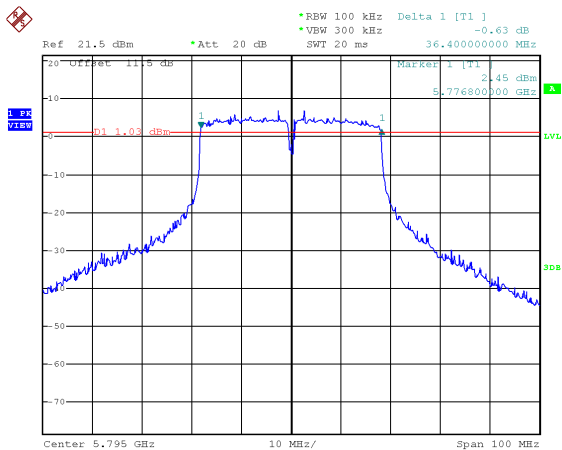







Antenna 2


Modulation Standard: 802.11a (6Mbps)  
CH149

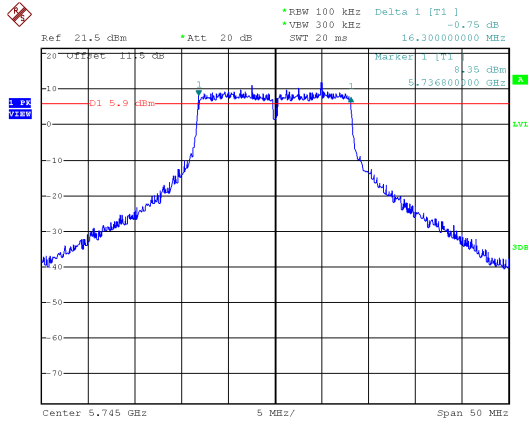


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH149

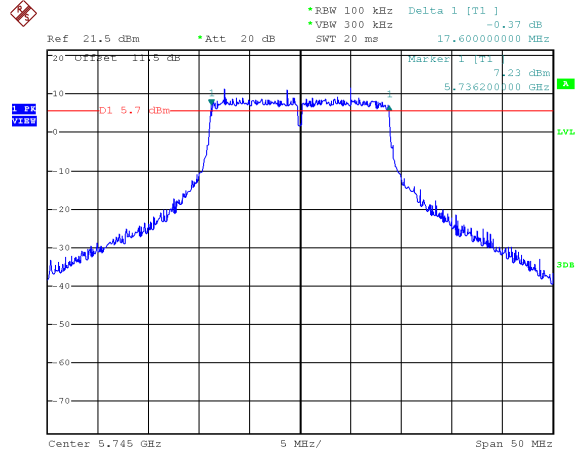


CH157

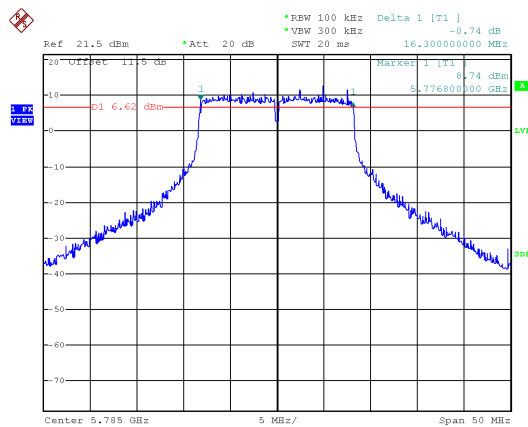


CH157

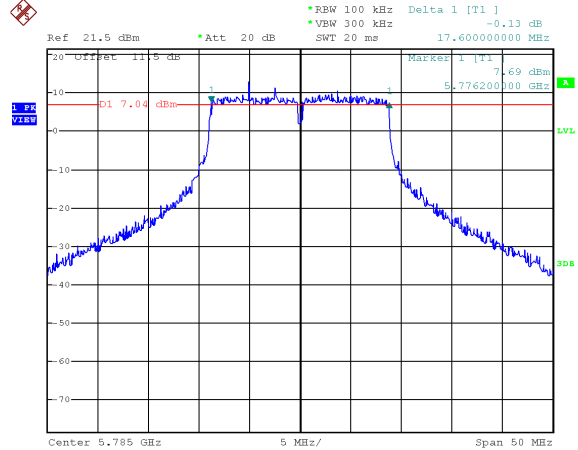

CH165

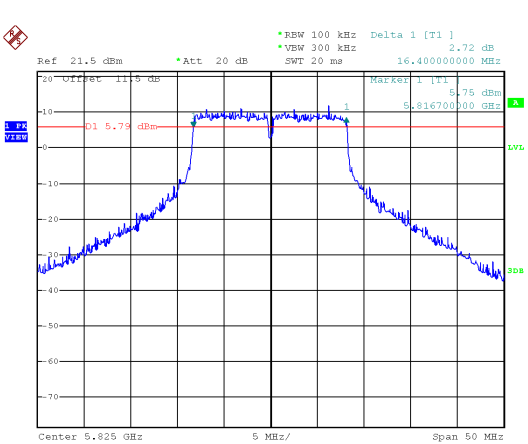


CH165

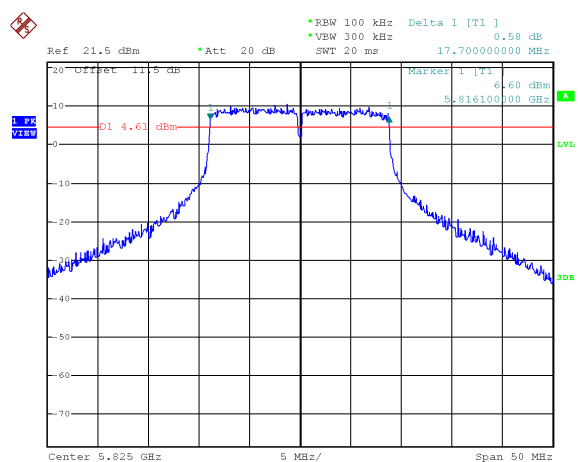




Antenna 2


Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH151

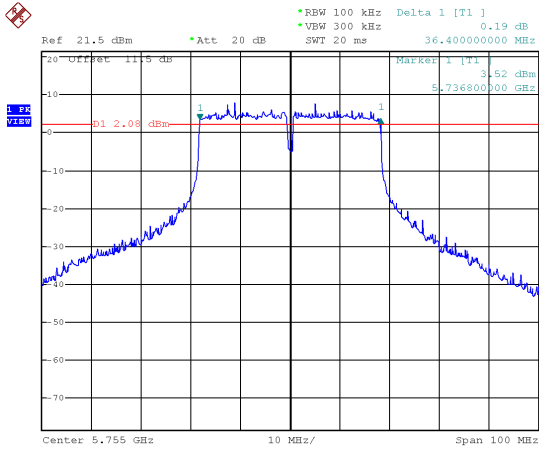

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH155

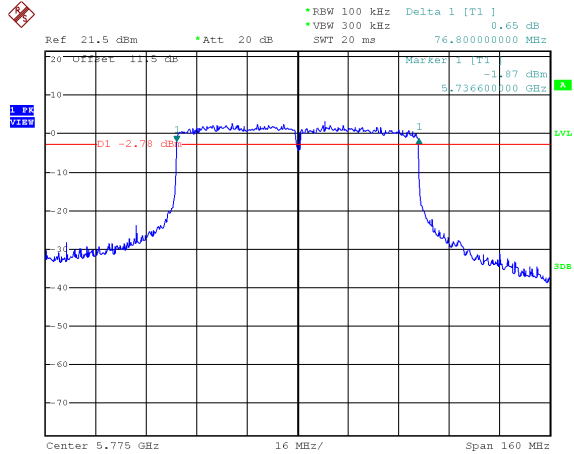


CH159

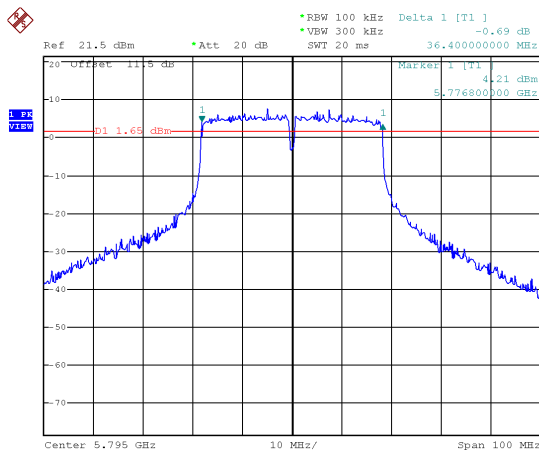




Antenna 3


Modulation Standard: 802.11a (6Mbps)  
CH149

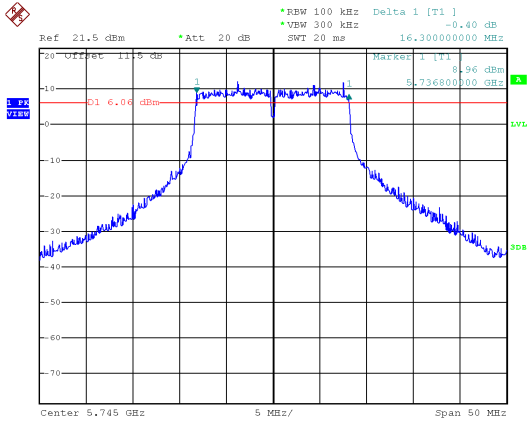


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH149

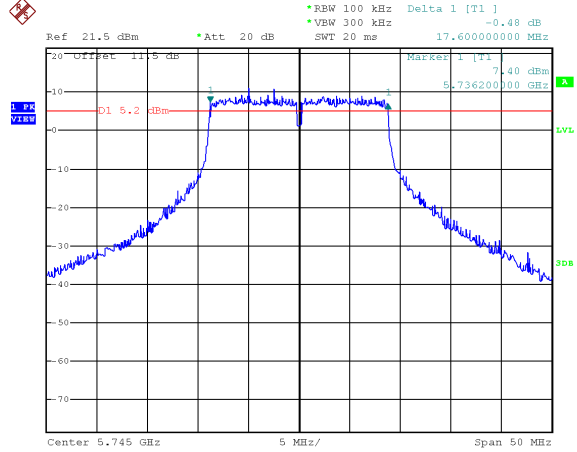


CH157

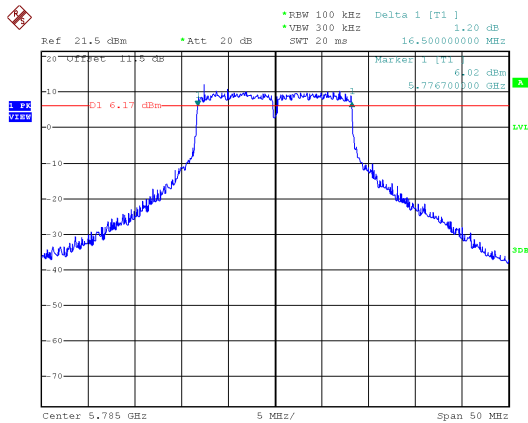


CH157

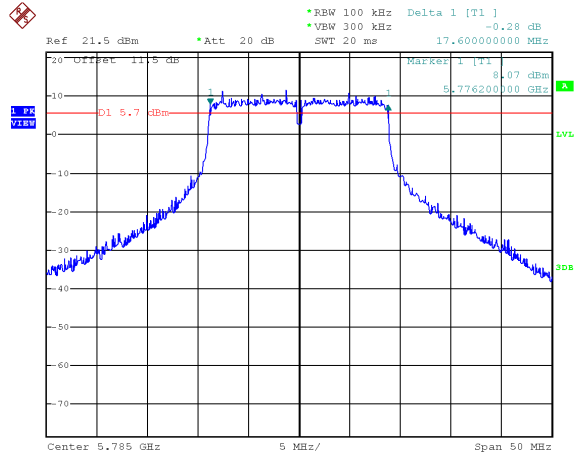

CH165

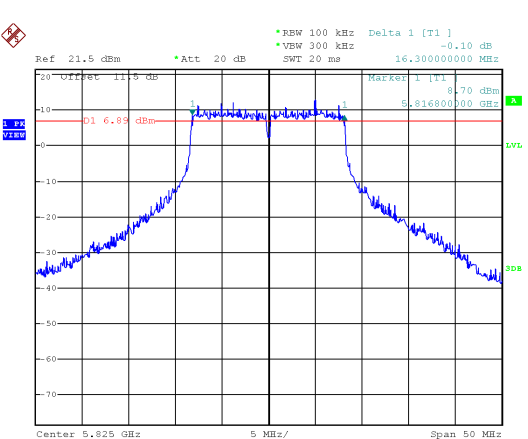

CH165


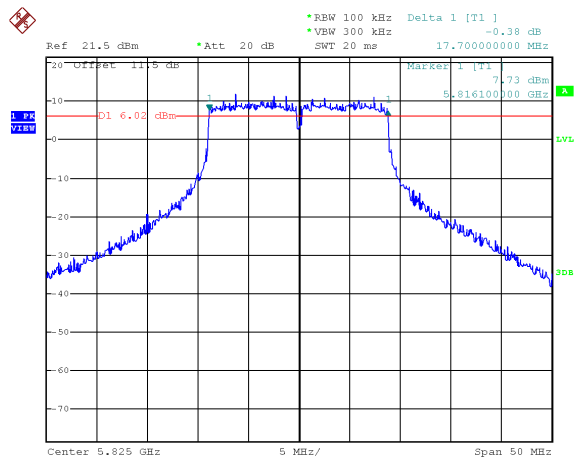





Antenna 3

Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH151

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH155

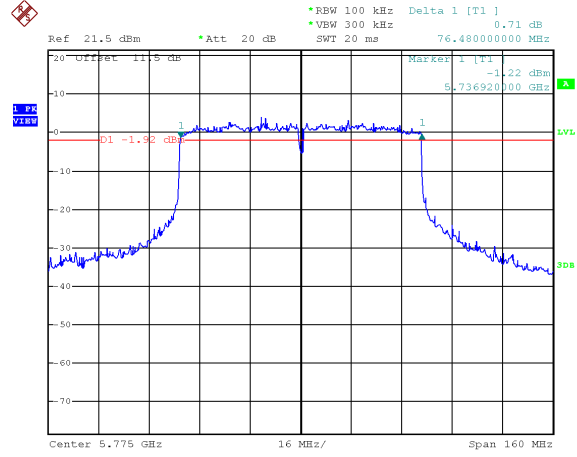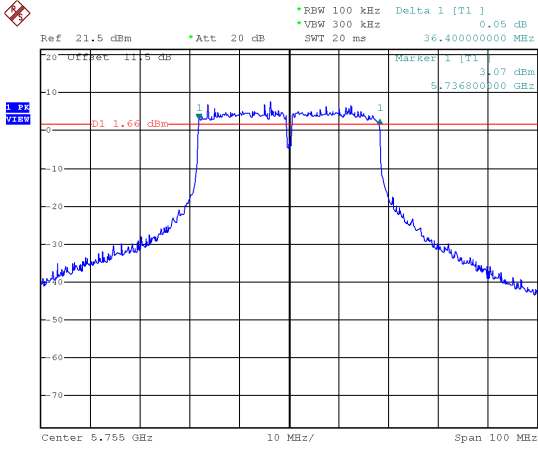

CH159

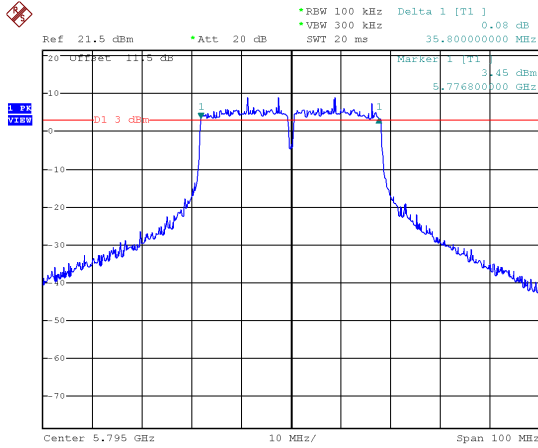



### 9. 26dB Bandwidth


#### 9.1. Test Limit

None; for reporting purposes only.

#### 9.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW = approximately 1% of the emission bandwidth, the VBW >= 3 x RBW, peak detector and max hold.

#### 9.3. Test Setup Layout



#### 9.4. Test Result and Data

Test Date : Dec. 12, 2016  
 Temperature : 24°C  
 Humidity : 60%


##### In the 5.2G Band

Modulation Type	Channel	Frequency (MHz)	26dB Bandwidth (MHz)		
			ANT 1	ANT 2	ANT 3
802.11a	36	5180	21.50	21.60	22.00
	44	5220	22.10	22.10	21.40
	48	5240	21.90	22.10	21.60
802.11ac VHT20	36	5180	22.80	23.20	23.40
	44	5220	23.00	22.90	22.80
	48	5240	22.90	23.00	23.00
802.11ac VHT40	38	5190	46.00	46.00	45.00
	46	5230	46.60	46.20	46.20
802.11ac VHT80	42	5210	86.40	86.72	87.04




Antenna 1


Modulation Standard: 802.11a (6Mbps) CH36

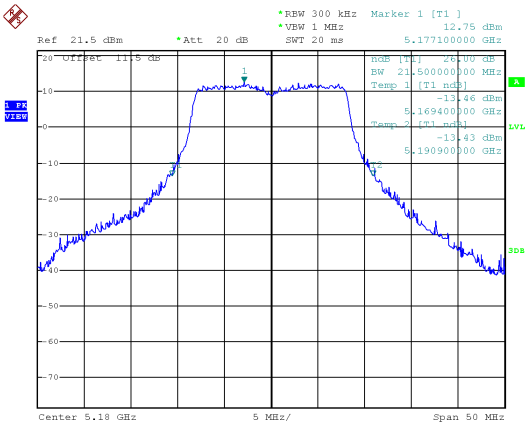


Modulation Standard: 802.11ac, VHT20 (6.5Mbps) CH36

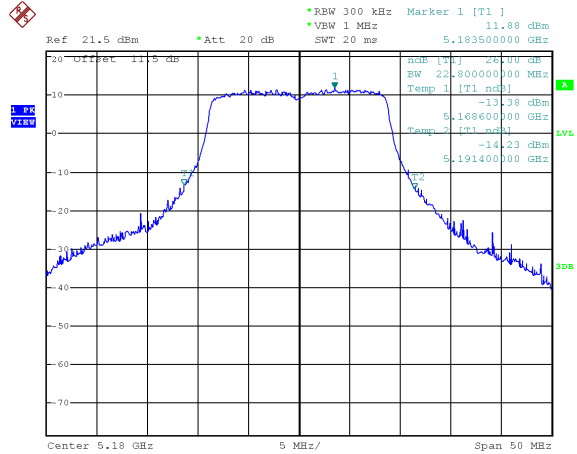


CH44

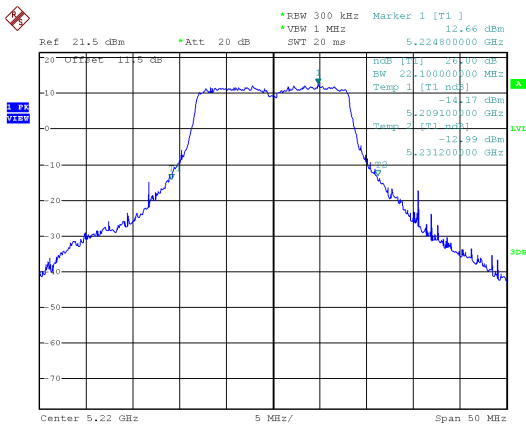


CH44

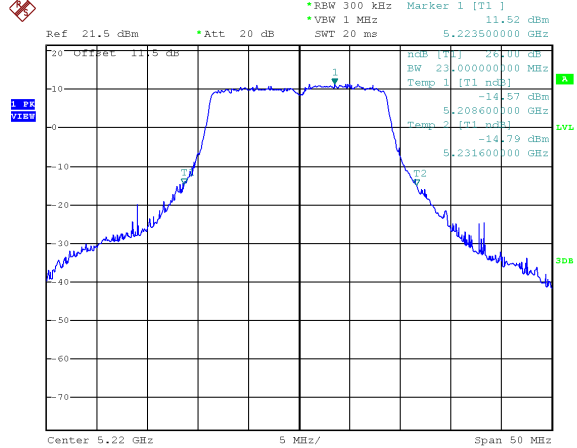

CH48

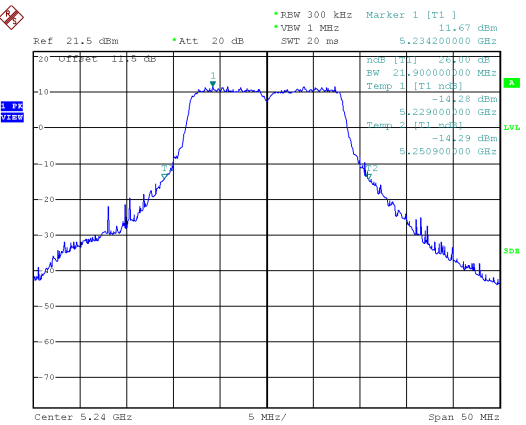


CH48

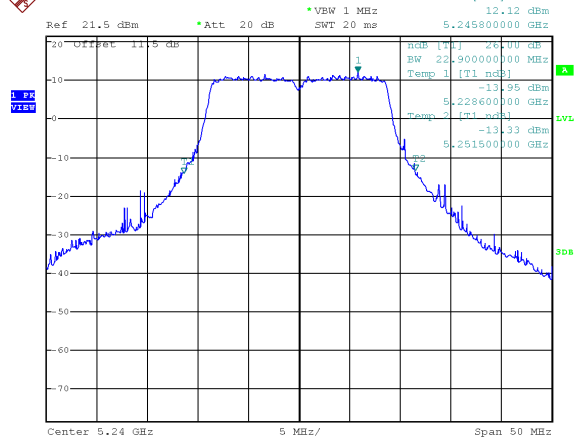




Antenna 1


Modulation Standard: 802.11ac, VHT40 (13.5Mbps) CH38

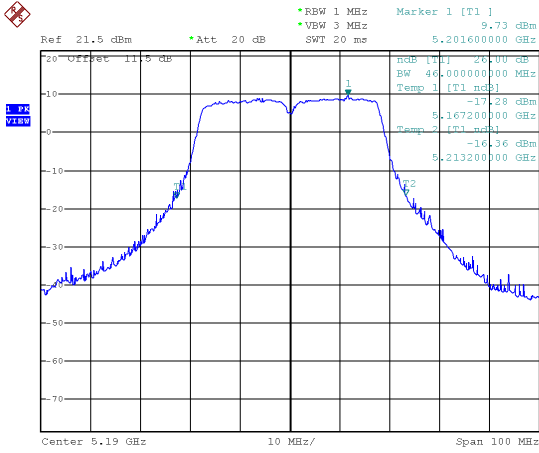

Modulation Standard: 802.11ac, VHT80 (29.3Mbps) CH42

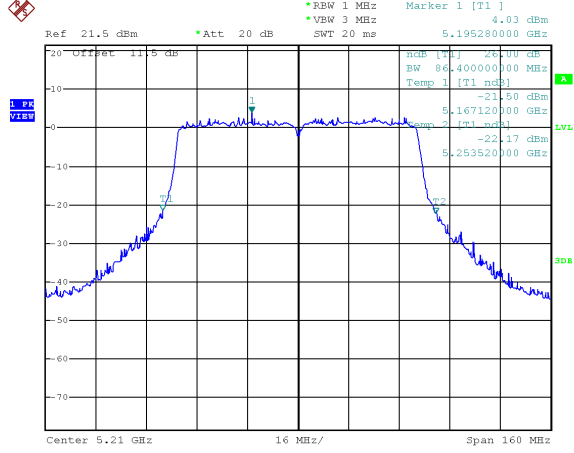


CH46

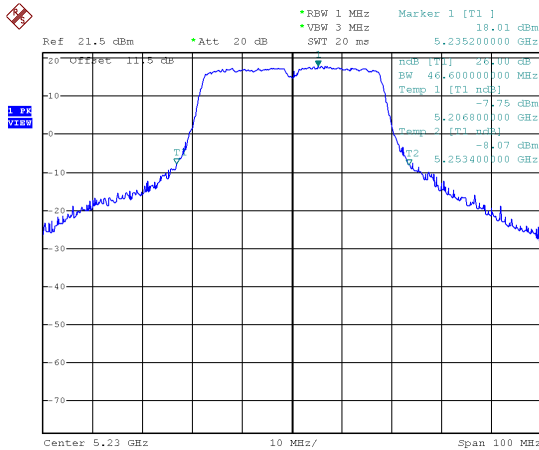




Antenna 2


Modulation Standard: 802.11a (6Mbps) CH36

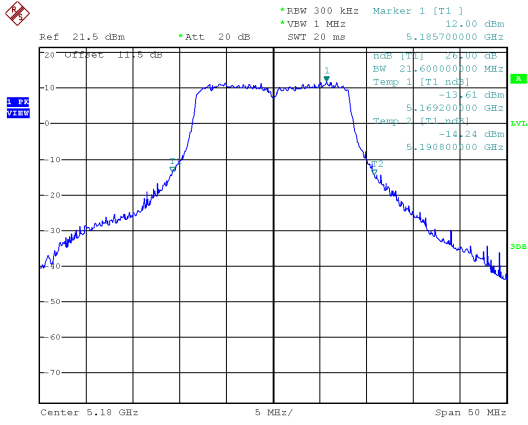


Modulation Standard: 802.11ac, VHT20 (6.5Mbps) CH36

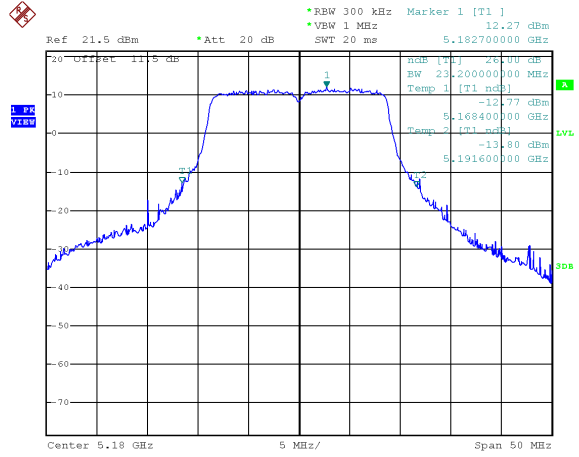


CH44

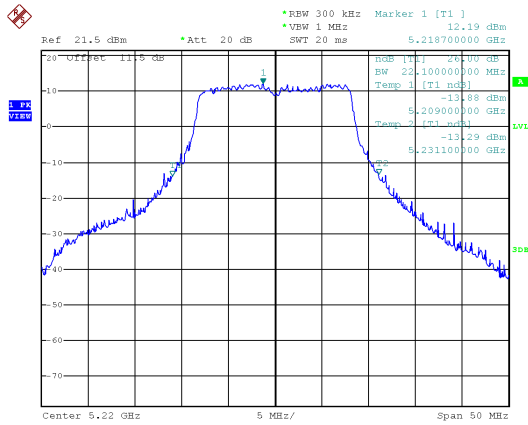


CH44

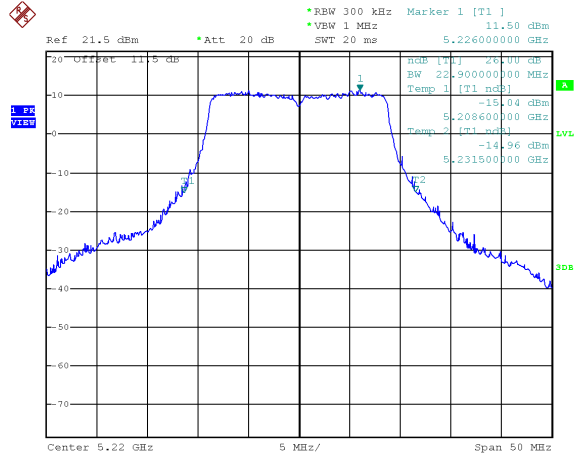

CH48

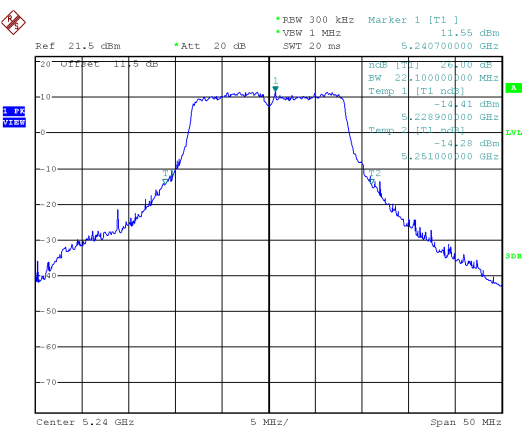

CH48

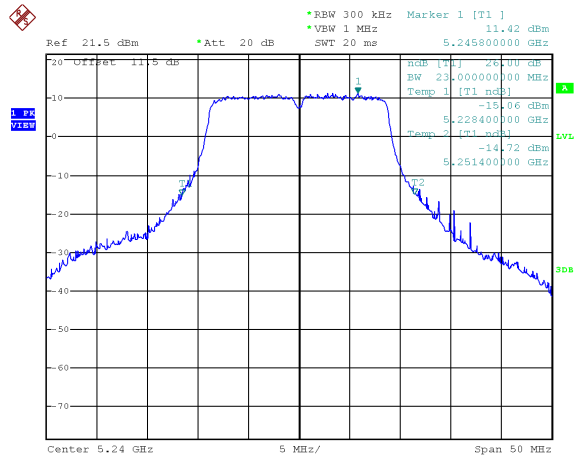







Antenna 2


Modulation Standard: 802.11ac, VHT40 (13.5Mbps) CH38

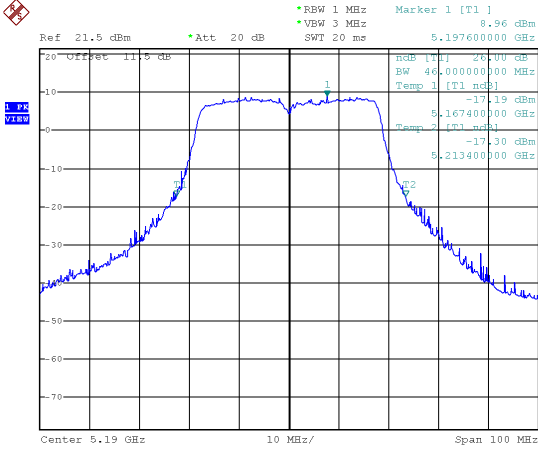

Modulation Standard: 802.11ac, VHT80 (29.3Mbps) CH42

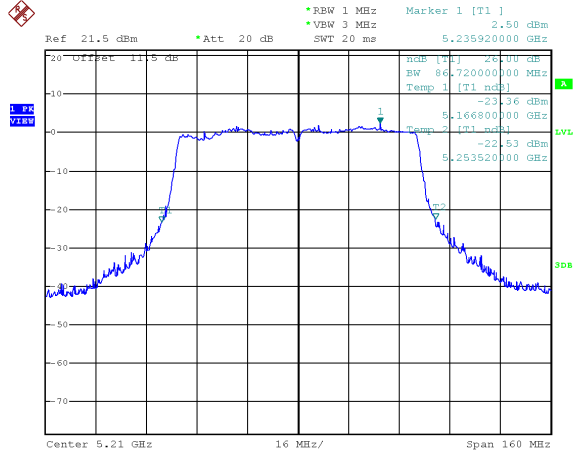


CH46

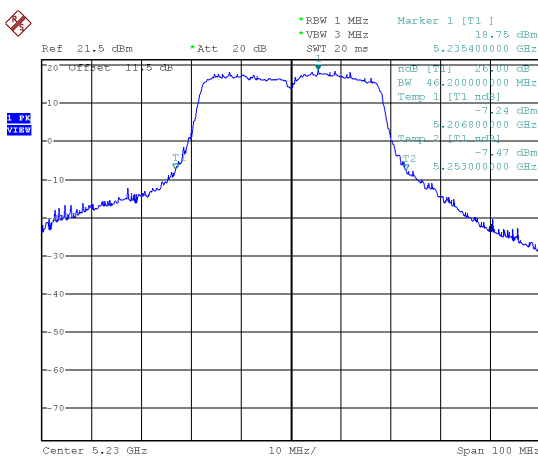




Antenna 3


Modulation Standard: 802.11a (6Mbps)  
CH36

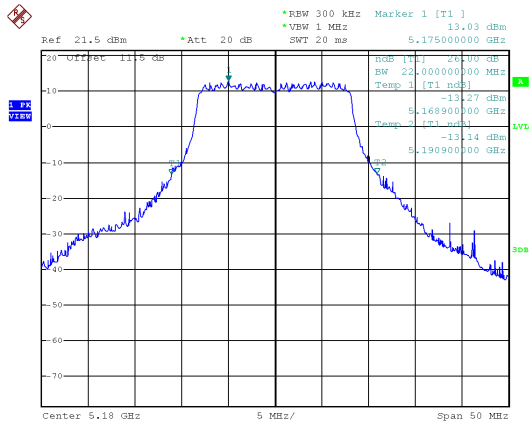


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH36

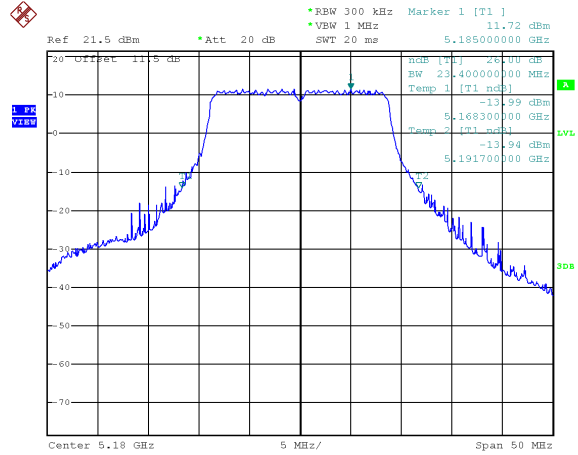


CH44

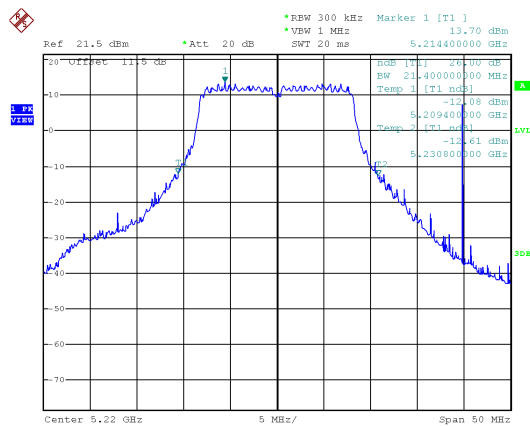


CH44

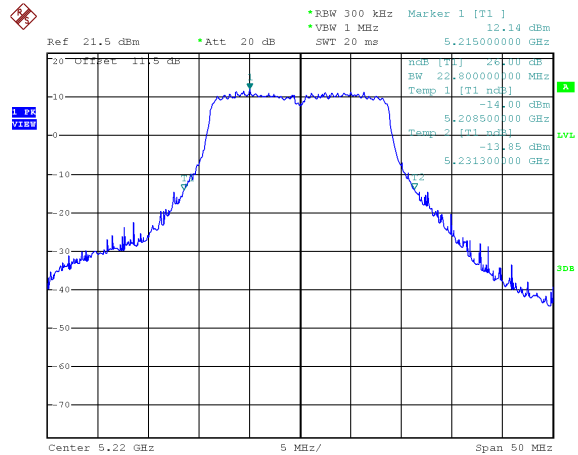

CH48

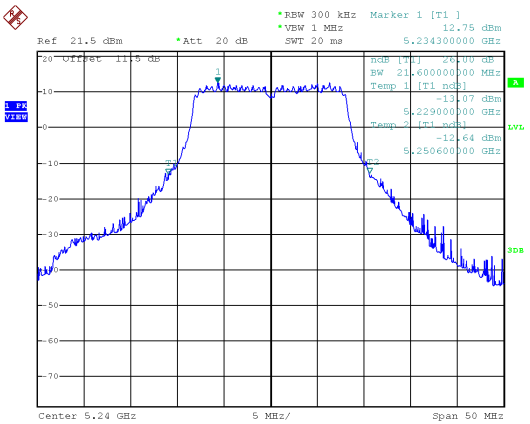


CH48

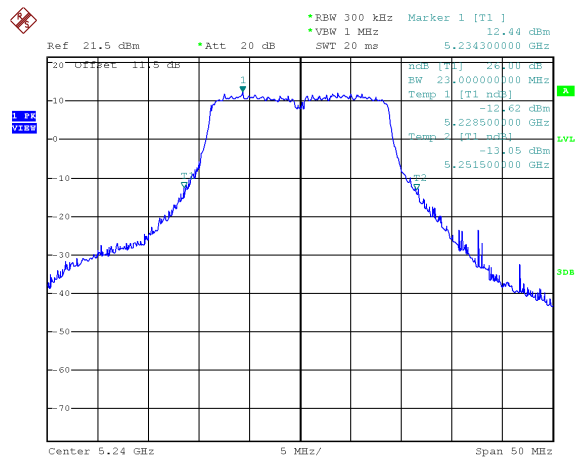




Antenna 3


Modulation Standard: 802.11ac, VHT40 (13.5Mbps) CH38

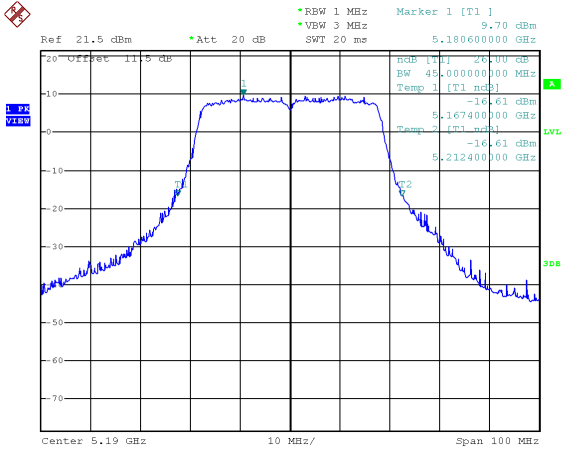

Modulation Standard: 802.11ac, VHT80 (29.3Mbps) CH42

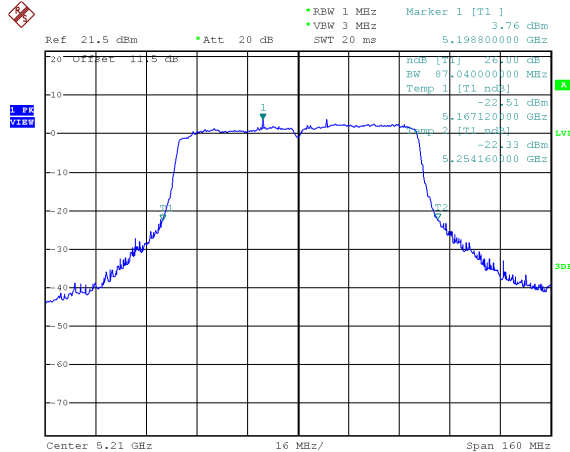

CH46

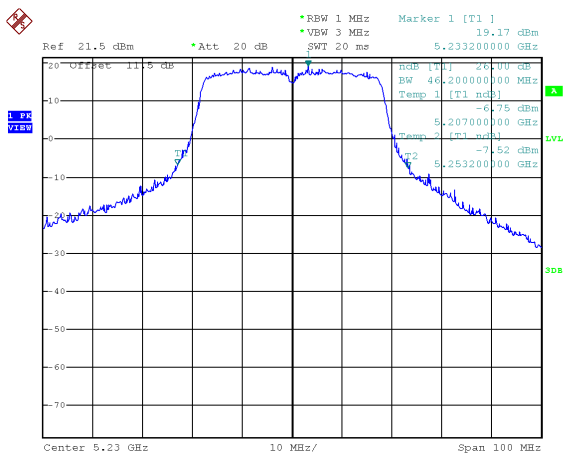



## 10. Average Power

### 10.1. Test Limit


None; for reporting purposes only.

### 10.2. Test Procedure

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

### 10.3. Test Setup Layout



### 10.4. Test Result and Data

Test Date : Dec. 12, 2016  
 Temperature : 24°C  
 Humidity : 60%

#### In the 5.2G Band

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)			Total Power (dBm) 1+2+3	Power Limit (dBm)
			ANT 1	ANT 2	ANT 3		
802.11a	36	5180	21.11	21.23	20.56	25.75	30.00
	44	5220	21.34	21.22	20.75	25.88	30.00
	48	5240	20.33	20.22	20.04	24.97	30.00
802.11an HT20	36	5180	21.05	20.91	20.71	25.66	30.00
	44	5220	21.03	20.95	20.63	25.64	30.00
	48	5240	21.08	21.01	21.13	25.84	30.00
802.11an HT40	38	5190	15.88	15.12	14.82	20.07	30.00
	46	5230	24.25	23.82	24.11	28.83	30.00
802.11ac VHT20	36	5180	21.13	21	20.78	25.74	30.00
	44	5220	21.11	21.01	20.75	25.73	30.00
	48	5240	21.15	21.12	21.2	25.93	30.00
802.11ac VHT40	38	5190	15.93	15.16	14.89	20.12	30.00
	46	5230	24.31	23.92	24.17	28.91	30.00
802.11ac VHT80	42	5210	11.38	11.23	10.82	15.92	30.00



Test Date : Dec. 12, 2016  
Temperature : 24°C  
Humidity : 60%

**In the 5.8G Band**

Modulation Type	Channel	Frequency (MHz)	Avg Power Output (dBm)			Total Power (dBm)	Power Limit (dBm)
			ANT 1	ANT 2	ANT 3	1+2+3	
802.11a	149	5745	20.8	21.55	21.43	26.04	30.00
	157	5785	21.31	22.03	21.81	26.50	30.00
	165	5825	21.37	22.14	21.65	26.50	30.00
802.11an HT20	149	5745	20.42	21.36	21.37	25.84	30.00
	157	5785	21.65	21.75	21.77	26.49	30.00
	165	5825	21.35	22.29	21.48	26.50	30.00
802.11an HT40	151	5755	23.31	23.78	23.36	28.26	30.00
	159	5795	22.95	23.27	23.67	28.08	30.00
802.11ac VHT20	149	5745	20.51	21.55	21.46	25.97	30.00
	157	5785	21.71	21.83	21.86	26.57	30.00
	165	5825	21.46	22.33	21.53	26.56	30.00
802.11ac VHT40	151	5755	23.36	23.82	23.41	28.31	30.00
	159	5795	23.03	23.31	23.74	28.14	30.00
802.11ac VHT80	155	5775	22.34	22.83	22.51	27.34	30.00



## 11. Output Power and PPSD

### 11.1. Test Limit

**Output Power:**

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.15~5.25GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/> Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/> Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/> Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



Frequency Band		Limit
<input type="checkbox"/>	5.25-5.35 GHz	The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	5.470-5.725 GHz	
<input checked="" type="checkbox"/>	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

**PSD:**

Frequency Band		Limit	
<input checked="" type="checkbox"/>	5.15~5.25GHz		
	Operating Mode		
	<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
	<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
	<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz	
<input type="checkbox"/>	5.725~5.85 GHz	11 dBm/MHz	
<input type="checkbox"/>	5.470-5.725 GHz	11 dBm/MHz	
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz	



### 11.2. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was Measured with an average power meter employing a video bandwidth greater than 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.


802.11an (BW ≤ 40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D01 section F) procedure is used for measurements.

### 11.3. Test Setup Layout





**11.4. Test Result and Data**

Test Date : Dec. 12, 2016  
 Temperature : 24°C  
 Humidity : 60%

**In the 5.2G Band**

Modulation Type	CH	Freq. (MHz)	Meas PPSD (dBm/MHz)			Sum chain (dBm)	Duty Cycle CF(dB)	Total Corr'd PPSD (dBm/MHz)	PPSD Limit (dBm/MHz)
			ANT 1	ANT 2	ANT 3				
802.11a	36	5180	8.18	8.25	7.60	12.79	0.00	12.79	13.23
	44	5220	8.32	8.27	7.81	12.91	0.00	12.91	13.23
	48	5240	7.73	7.63	7.52	12.40	0.00	12.40	13.23
802.11ac VHT20	36	5180	8.15	8.33	7.97	12.92	0.00	12.92	13.23
	44	5220	8.19	7.90	7.85	12.75	0.00	12.75	13.23
	48	5240	7.81	8.17	8.22	12.84	0.00	12.84	13.23
802.11ac VHT40	38	5190	0.48	-0.61	0.84	5.05	0.00	5.05	13.23
	46	5230	8.52	8.47	7.90	13.08	0.00	13.08	13.23
802.11ac VHT80	42	5210	-6.84	-7.21	-7.39	-2.37	0.00	-2.37	13.23


**In the 5.8G Band**

Modulation Type	CH	Freq. (MHz)	Meas PPSD (dBm/MHz)			Sum chain (dBm)	Duty Cycle CF(dB)	Total Corr'd PPSD (dBm/500KHz)	PPSD Limit (dBm/500KHz)
			ANT 1	ANT 2	ANT 3				
802.11a	149	5745	9.58	9.84	9.51	14.42	0.00	14.42	26.23
	157	5785	9.19	9.61	8.78	13.98	0.00	13.98	26.23
	165	5825	9.08	10.63	10.92	15.05	0.00	15.05	26.23
802.11ac VHT20	149	5745	6.95	10.77	10.41	14.45	0.00	14.45	26.23
	157	5785	9.39	9.58	10.90	14.78	0.00	14.78	26.23
	165	5825	11.24	11.57	11.37	16.17	0.00	16.17	26.23
802.11ac VHT40	151	5755	7.10	5.39	6.38	11.12	0.00	11.12	26.23
	159	5795	6.94	6.98	5.61	11.33	0.00	11.33	26.23
802.11ac VHT80	155	5775	2.73	4.80	9.64	11.49	0.00	11.49	26.23




5.2G Band  
Antenna 1


Modulation Standard: 802.11a (6Mbps)  
CH36

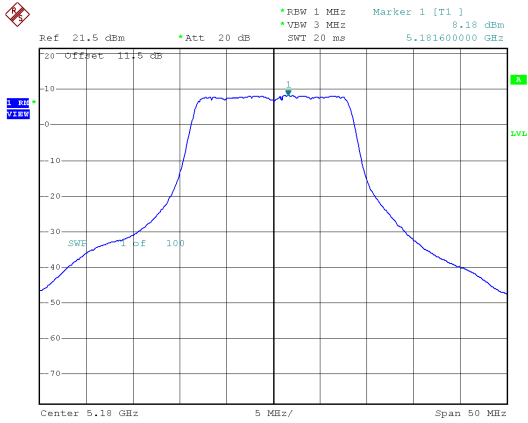


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH36

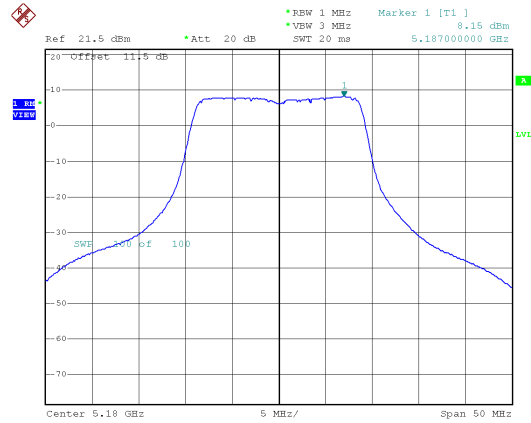


CH44

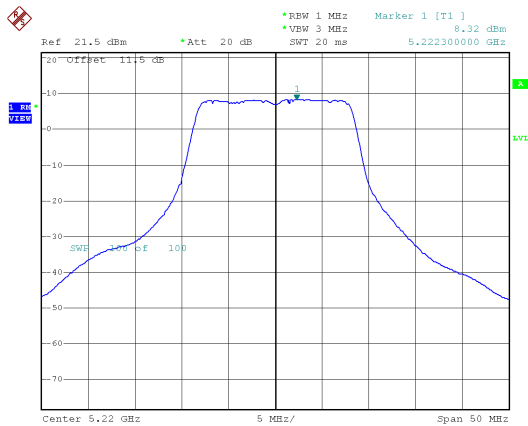


CH44

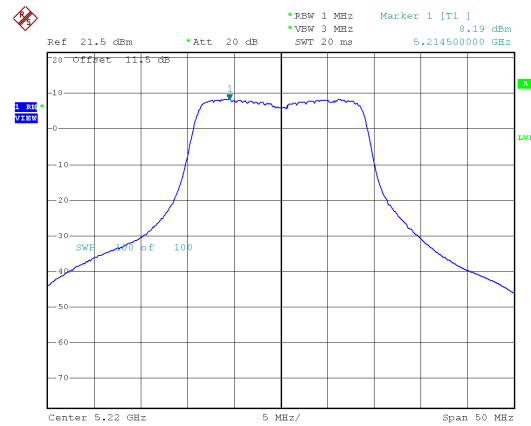

CH48

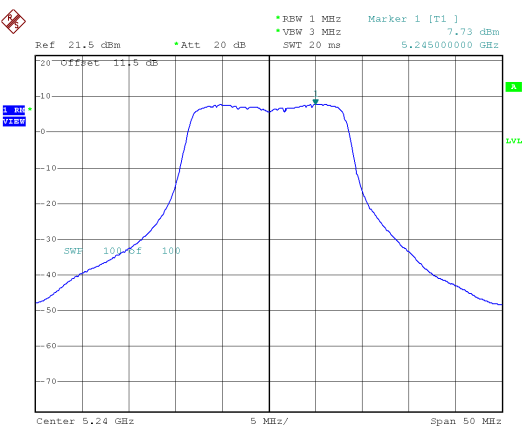


CH48

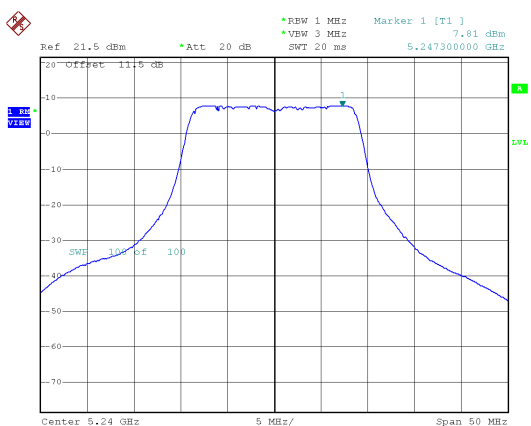




Antenna 1


Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH38

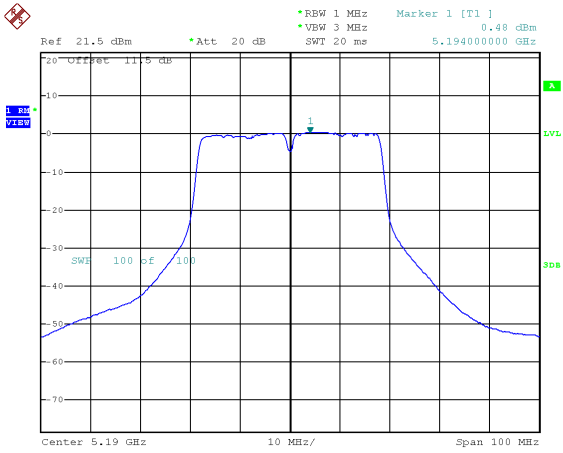

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH42

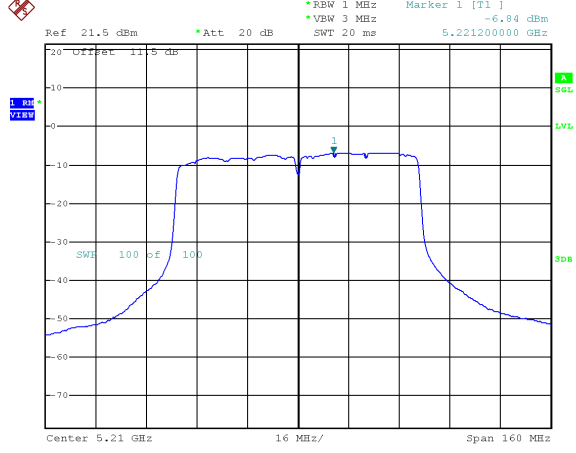


CH46

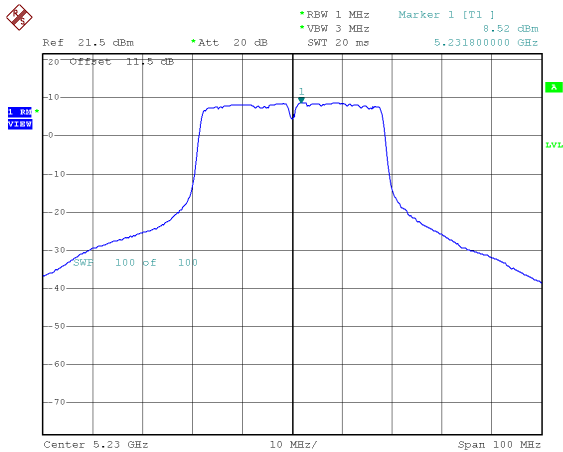




Antenna 2


Modulation Standard: 802.11a (6Mbps)  
CH36

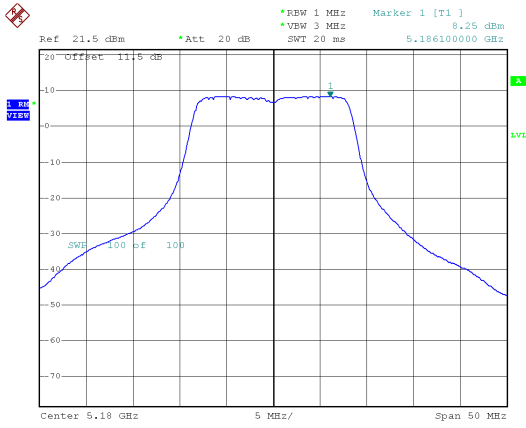


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH36

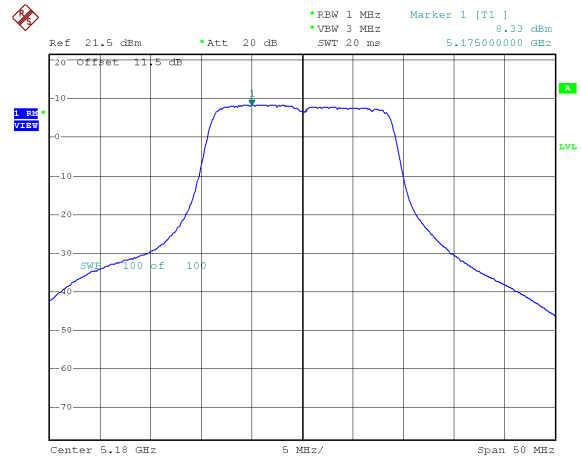


CH44

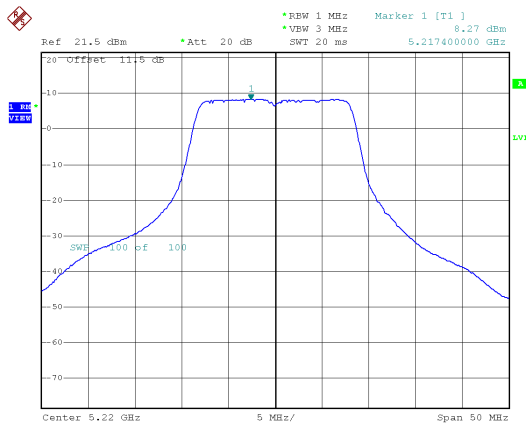


CH44

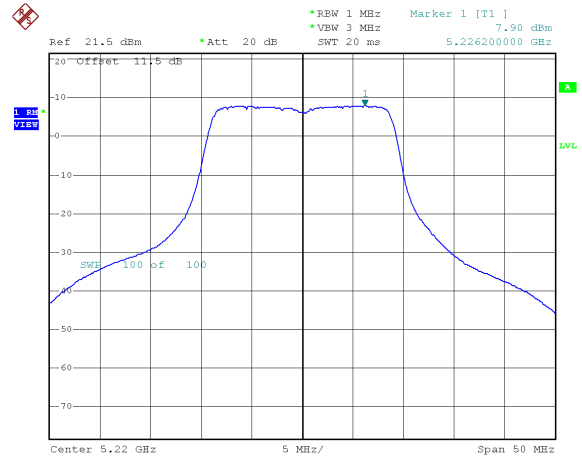

CH48

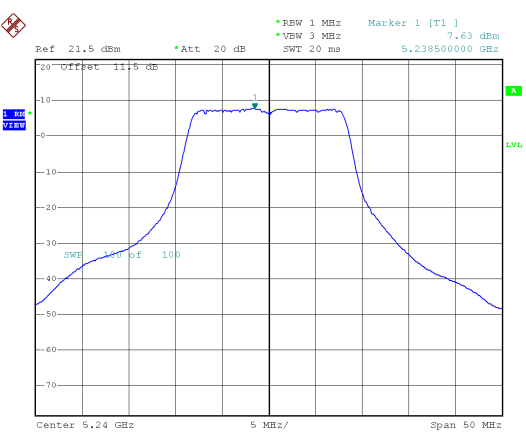


CH48

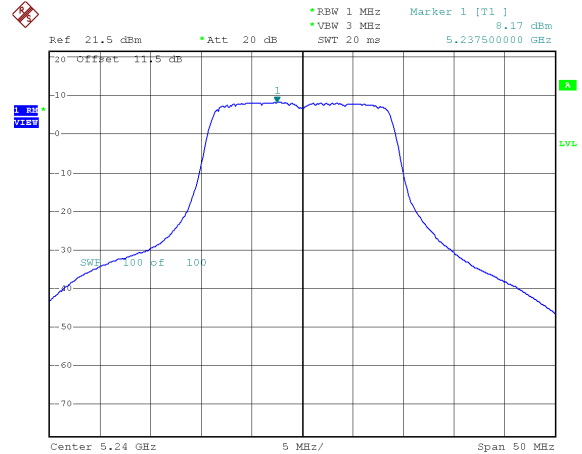




Antenna 2


Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH38

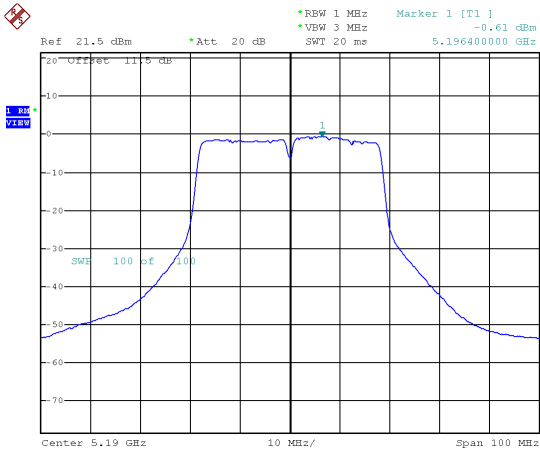

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH42

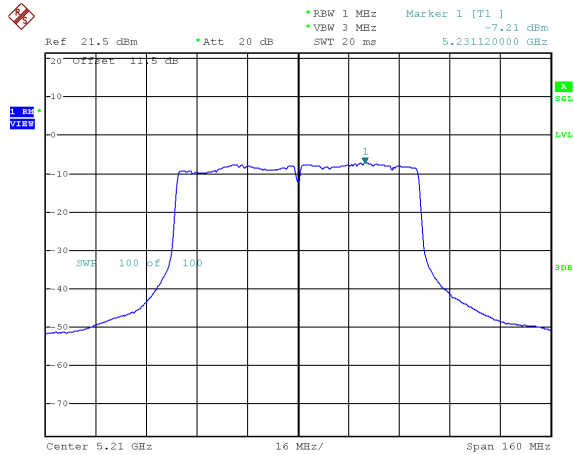


CH46

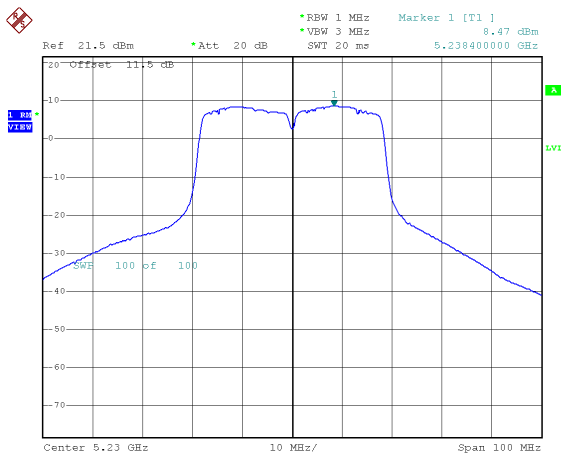




Antenna 3


Modulation Standard: 802.11a (6Mbps)  
CH36

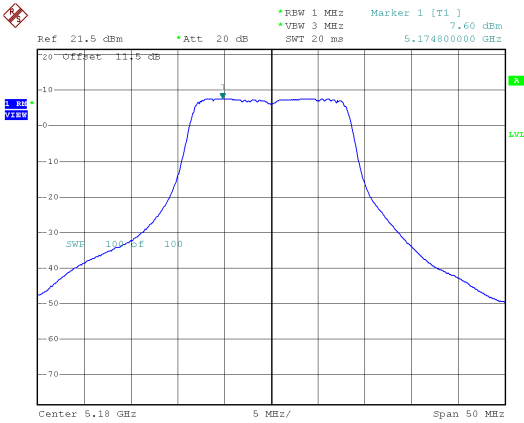


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH36

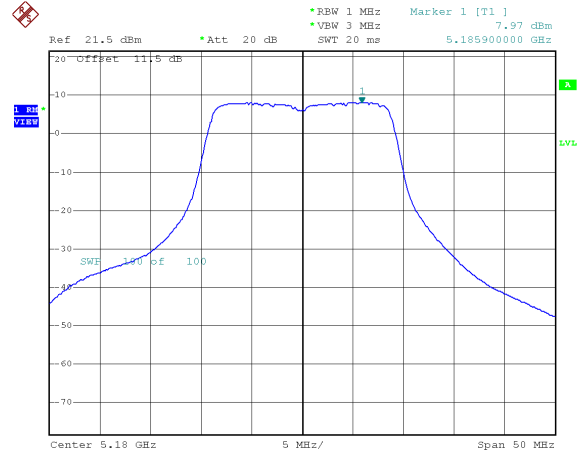


CH44

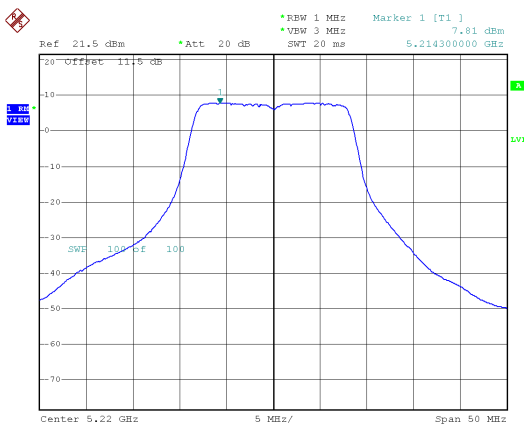


CH44

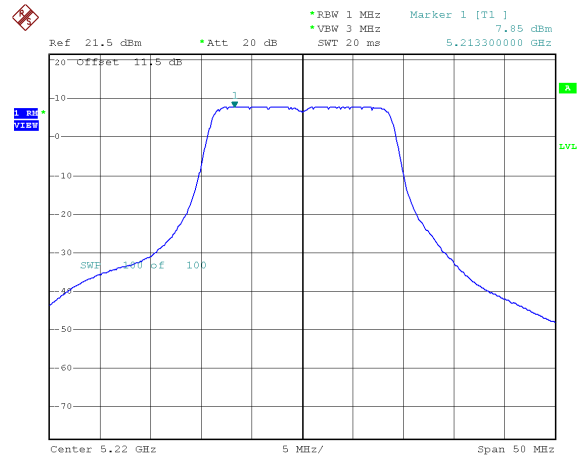

CH48

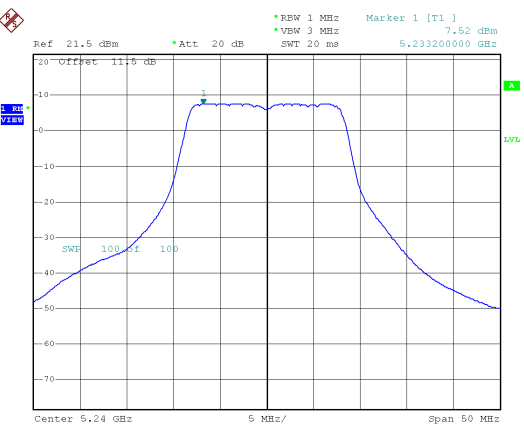


CH48

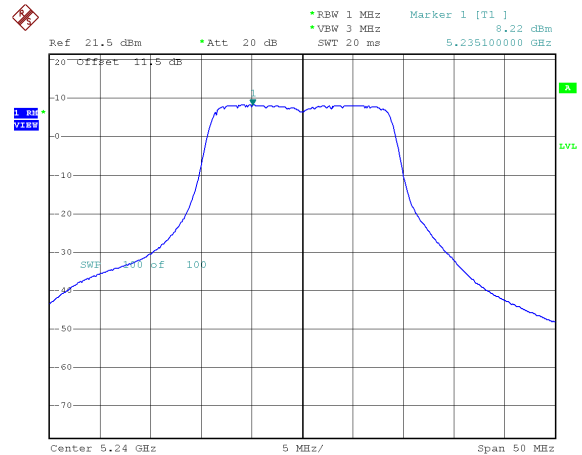




Antenna 3


Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH38

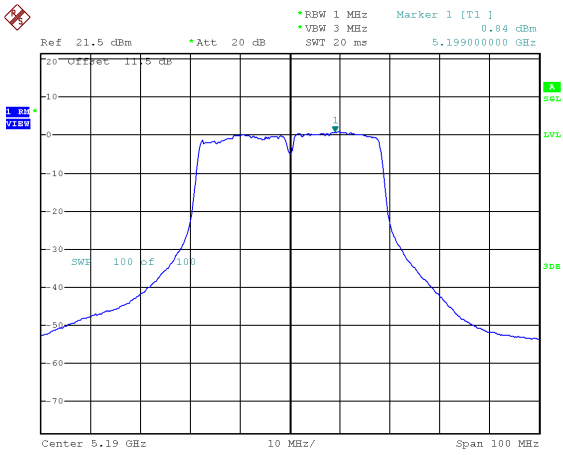

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH42

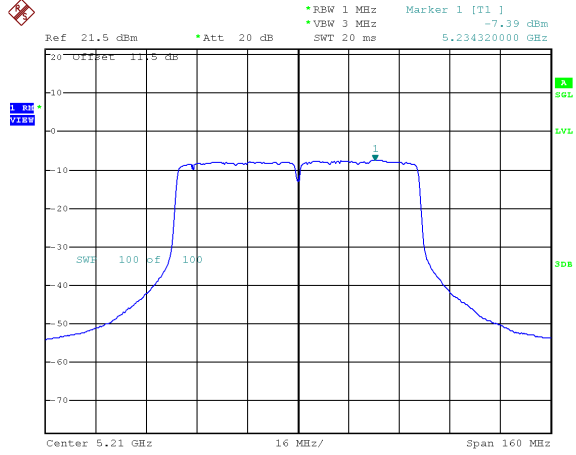

CH46

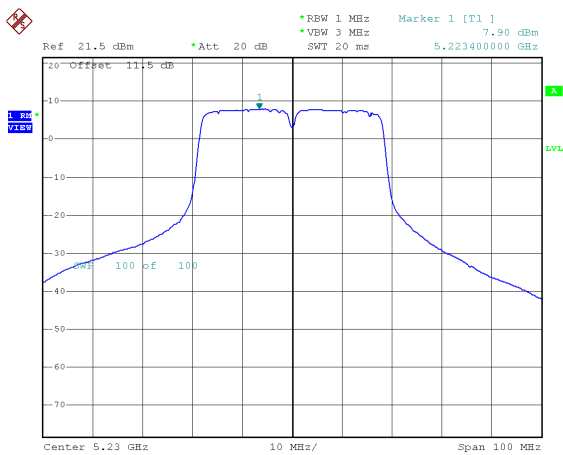





5.8G Band

Antenna 1


Modulation Standard: 802.11a (6Mbps)  
CH149

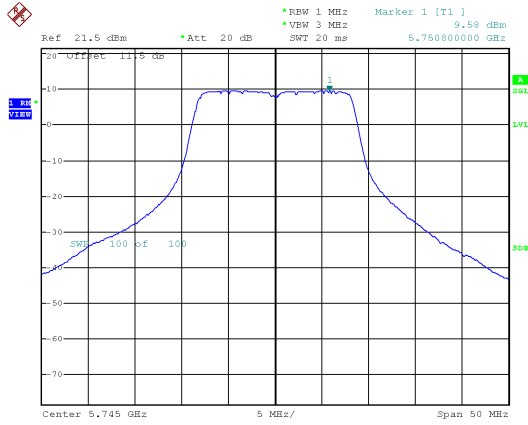


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH149

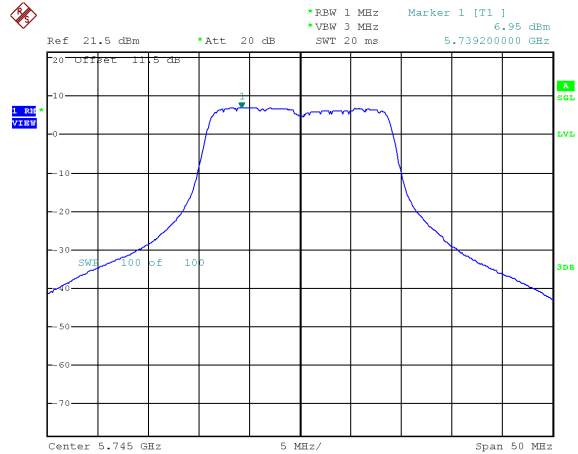


CH157

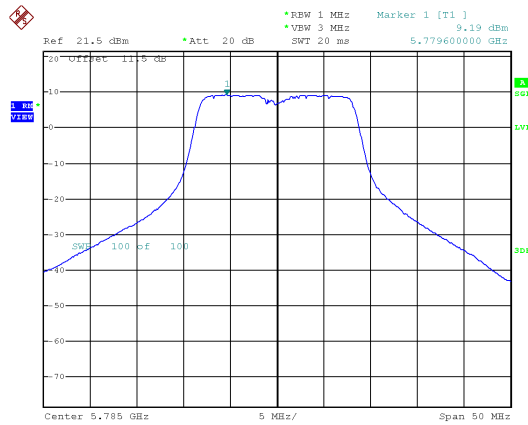


CH157

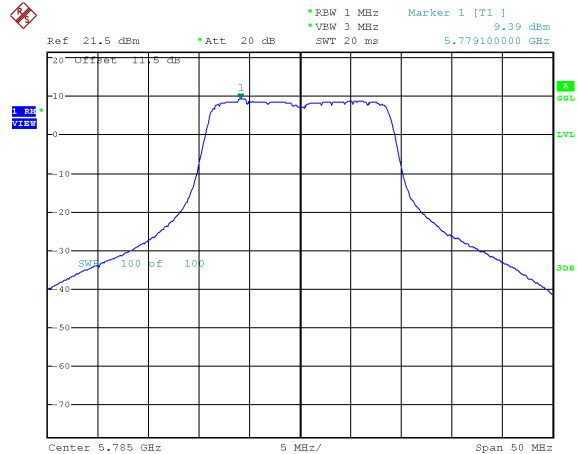

CH165

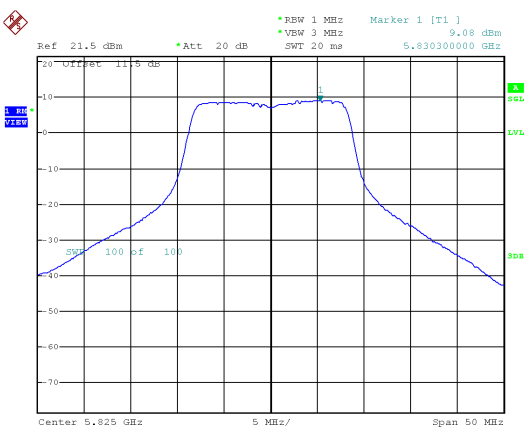

CH165

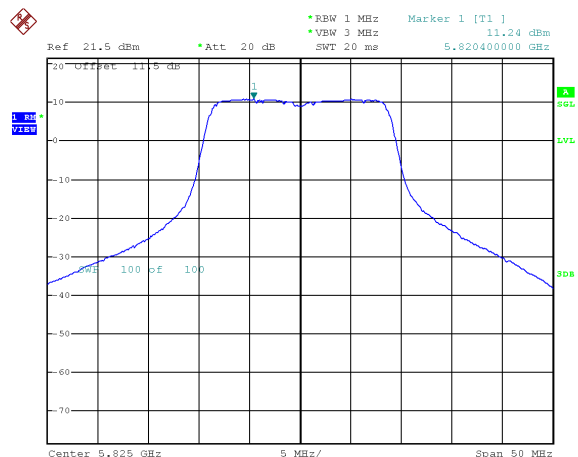







Antenna 1


Modulation Standard: 802.11ac, VHT40 (13.5Mbps) CH151

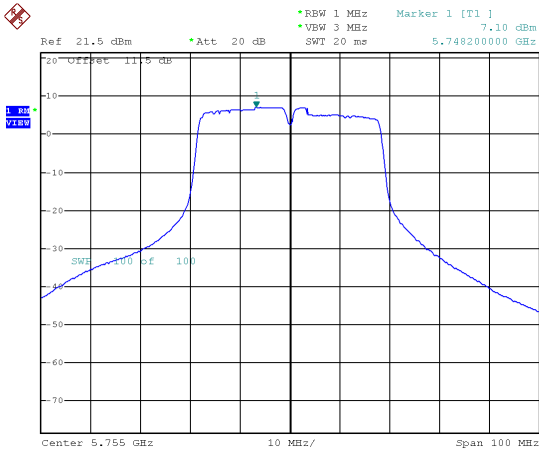

Modulation Standard: 802.11ac, VHT80 (29.3Mbps) CH155

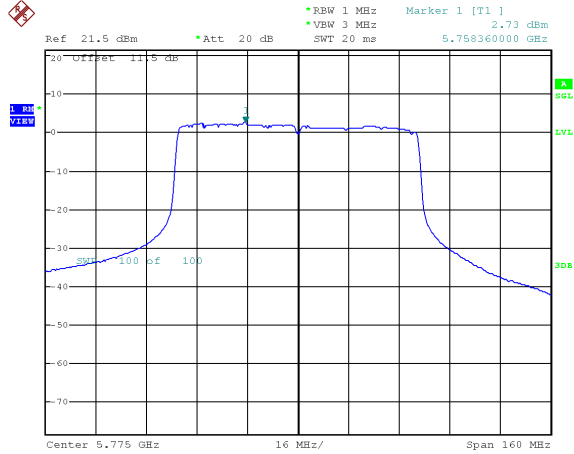


CH159

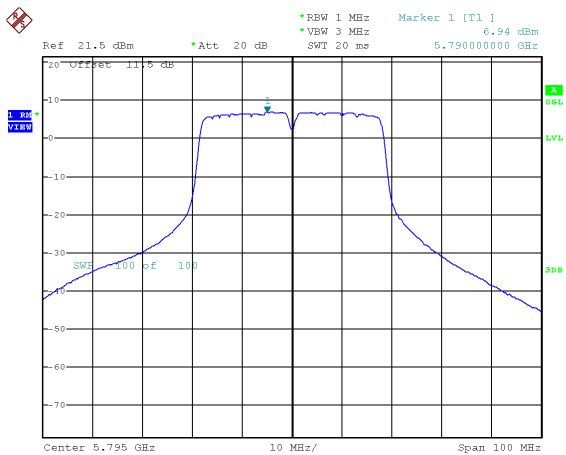




Antenna 2


Modulation Standard: 802.11a (6Mbps)  
CH149

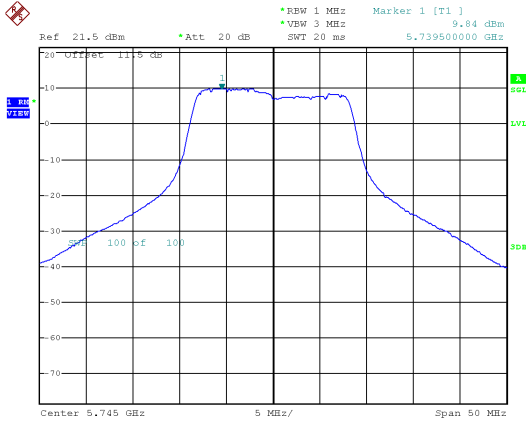


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH149

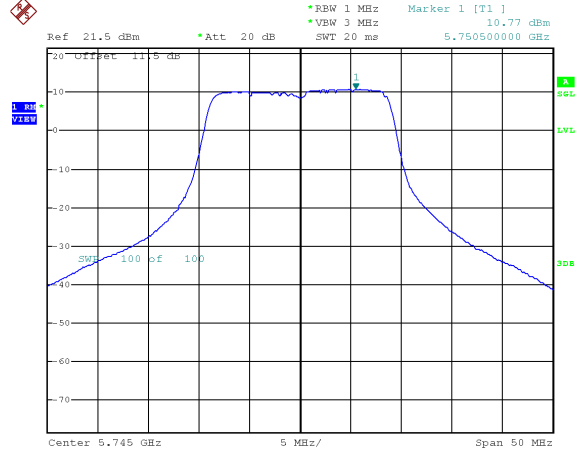


CH157

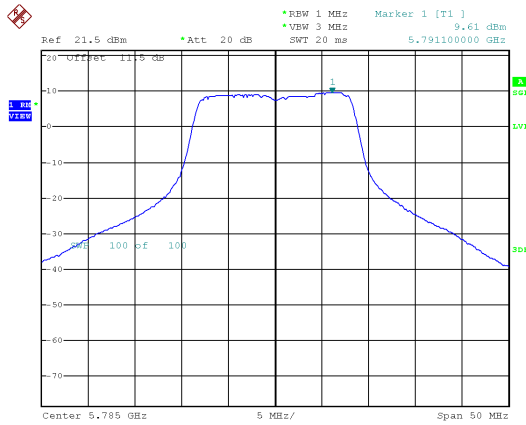


CH157

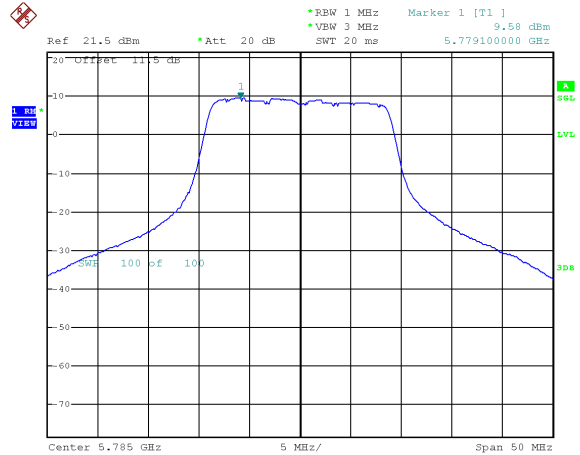

CH165

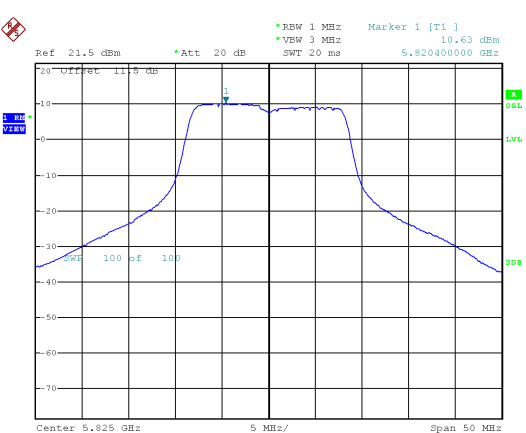


CH165

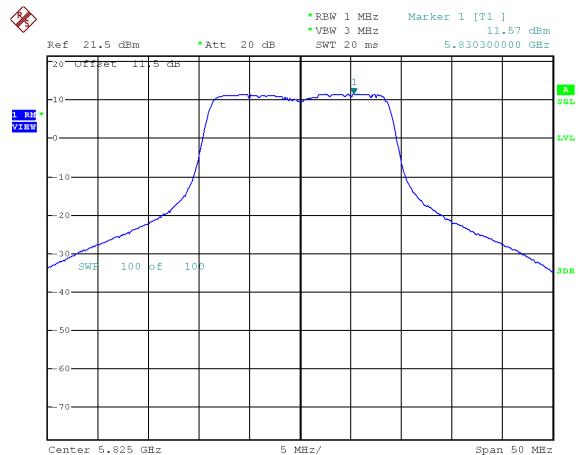




Antenna 2


Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH151

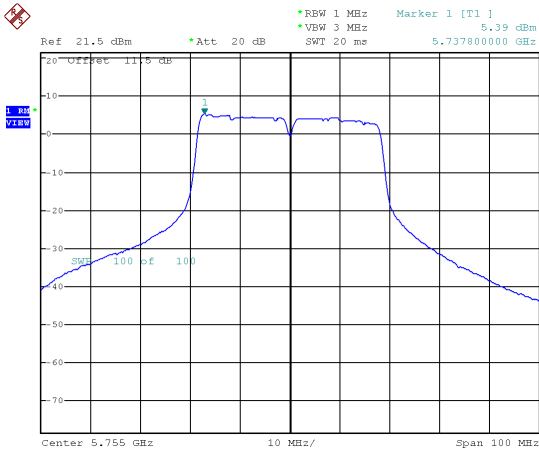

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH155

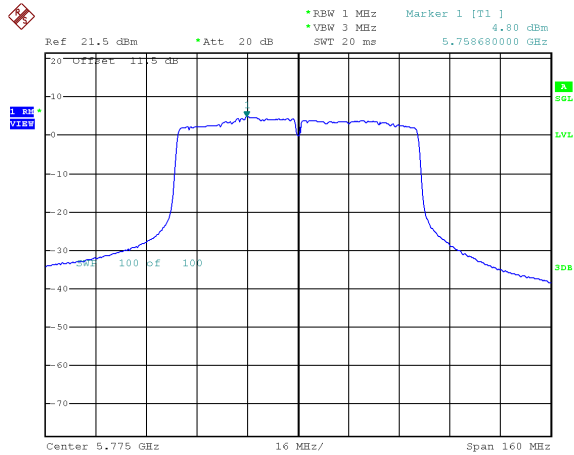


CH159

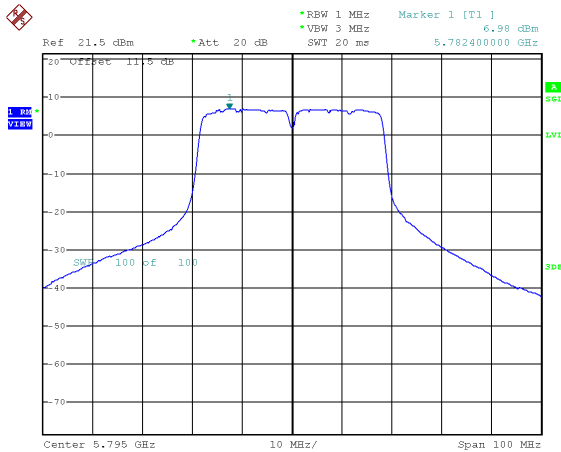




Antenna 3


Modulation Standard: 802.11a (6Mbps)  
CH149

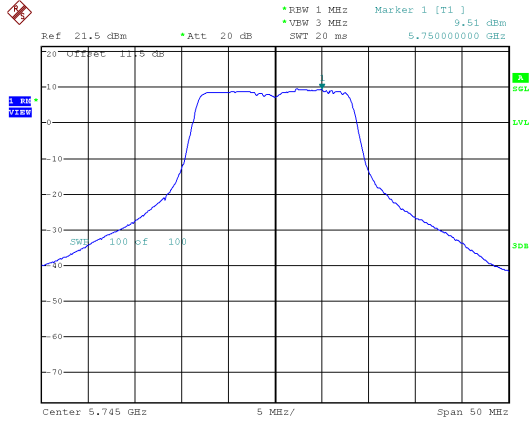


Modulation Standard: 802.11ac, VHT20 (6.5Mbps)  
CH149

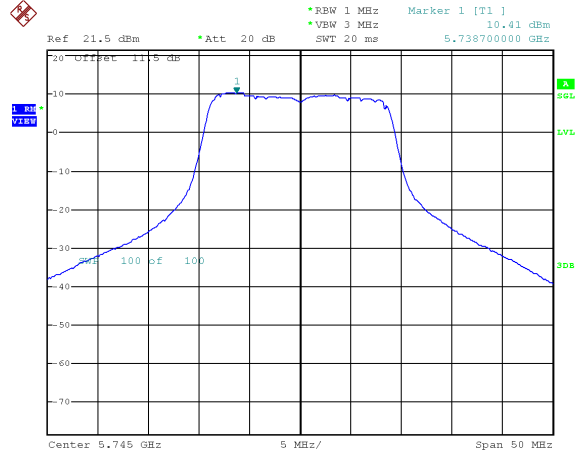


CH157

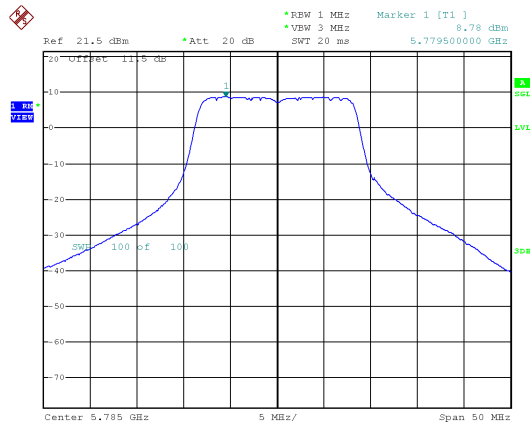


CH157

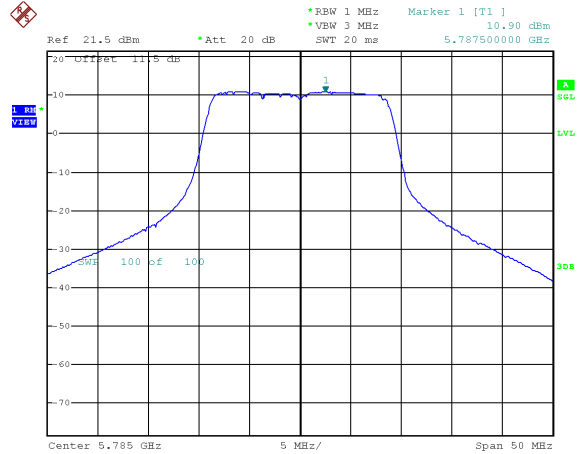

CH165

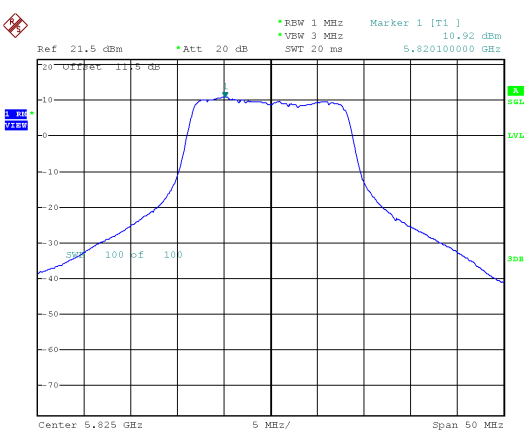


CH165

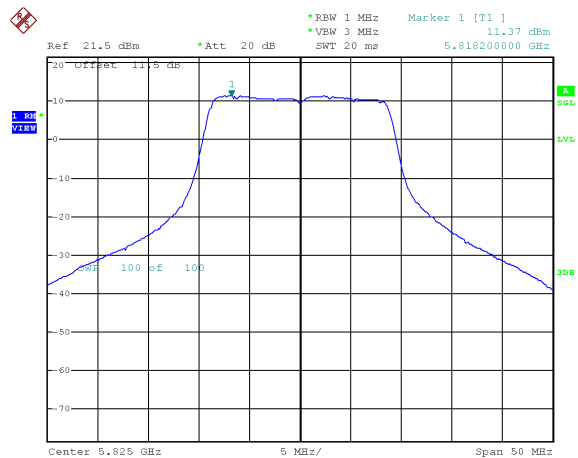




Antenna 3


Modulation Standard: 802.11ac, VHT40 (13.5Mbps)  
CH151

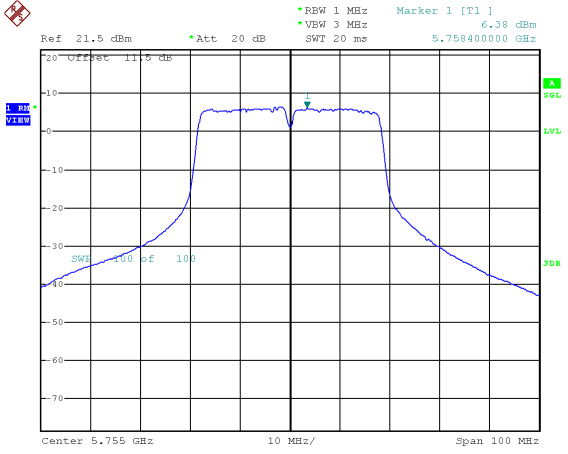

Modulation Standard: 802.11ac, VHT80 (29.3Mbps)  
CH155

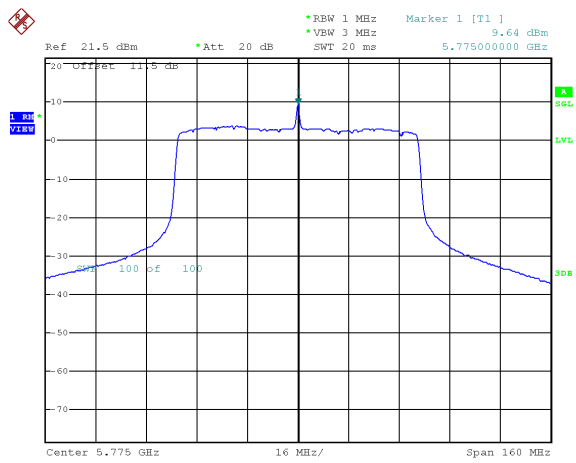

CH159

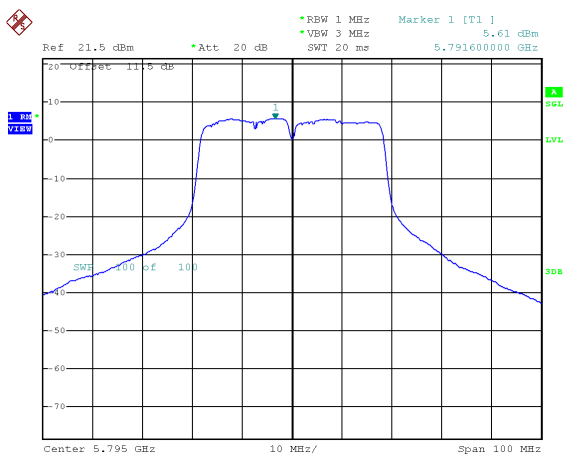




## 12. Frequency Stability

### 12.1. Test Procedure

1. The EUT was placed inside the Temperature and Humidity chamber.
2. The transmitter output was connected to spectrum analyzer.
3. Turn the EUT on and couple its output to a spectrum analyzer.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
6. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
7. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 12.2. Test Setup Layout

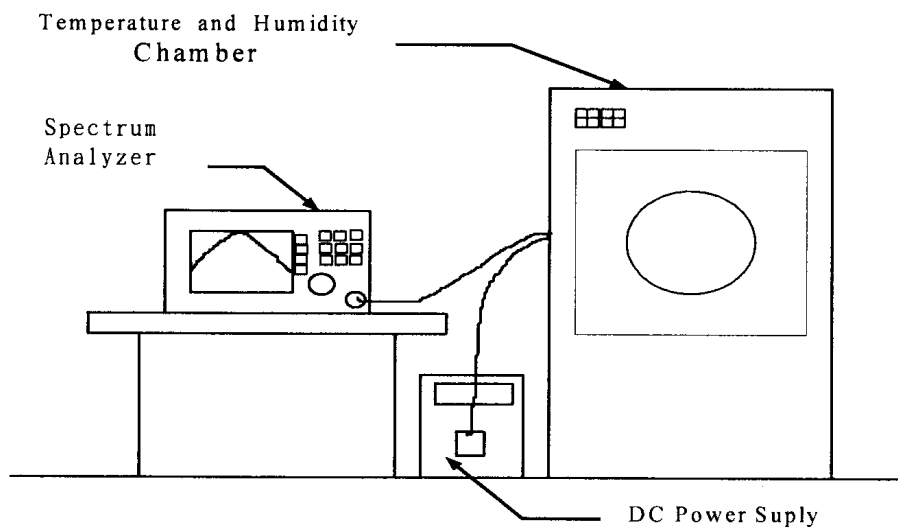

**12.3. Test Result and Data**

Test Date : Dec. 12, 2016  
 Temperature : 24°C  
 Humidity : 60%

Operating frequency: 5180 MHz							
Temp	Power supply	2 minute		5 minute		10 minute	
(°C)	(V)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
55	102	5179.1023	-0.017330	5179.4347	-0.010913	5179.7989	-0.038822
	120	5179.5275	-0.009122	5179.2388	-0.014695	5179.5585	-0.085232
	138	5179.8057	-0.003751	5179.6340	-0.007066	5179.6466	-0.068224
40	102	5179.6212	-0.007313	5179.2113	-0.015226	5179.5008	-0.096371
	120	5179.5803	-0.008102	5179.7817	-0.004214	5179.0461	-0.184151
	138	5179.7432	-0.004958	5179.9007	-0.001917	5179.3785	-0.119981
30	102	5179.3354	-0.012830	5179.7884	-0.004085	5179.9831	-0.003263
	120	5179.4794	-0.010050	5179.9837	-0.000315	5179.4741	-0.101525
	138	5179.0516	-0.018309	5179.8531	-0.002836	5179.7452	-0.049189
20	102	5179.3832	-0.011907	5179.9424	-0.001112	5179.2751	-0.139942
	120	5179.2907	-0.013693	5179.2610	-0.014266	5179.5086	-0.094865
	138	5179.4020	-0.011544	5179.8018	-0.003826	5179.6051	-0.076236
10	102	5179.9696	-0.000587	5179.6011	-0.007701	5179.9610	-0.007529
	120	5179.5275	-0.009122	5179.1447	-0.016512	5179.6413	-0.069247
	138	5179.0796	-0.017768	5179.5894	-0.007927	5179.4654	-0.103205
0	102	5179.3146	-0.013232	5179.2254	-0.014954	5179.5106	-0.094479
	120	5179.8171	-0.003531	5179.0348	-0.018633	5179.5309	-0.090560
	138	5179.5715	-0.008272	5179.6477	-0.006801	5179.7597	-0.046390
-10	102	5179.8998	-0.001934	5179.1101	-0.017180	5179.0146	-0.190232
	120	5179.8910	-0.002104	5179.4703	-0.010226	5179.8300	-0.032819
	138	5179.8835	-0.002249	5179.6645	-0.006477	5179.8756	-0.024015
-20	102	5179.6283	-0.007176	5179.9702	-0.000575	5179.6976	-0.058378
	120	5179.3348	-0.012842	5179.7113	-0.005573	5179.4022	-0.115405
	138	5179.3087	-0.013346	5179.9074	-0.001788	5179.6666	-0.064363
-30	102	5179.5113	-0.009434	5179.8462	-0.002969	5179.7065	-0.056660
	120	5179.1702	-0.016019	5179.0248	-0.018826	5179.4190	-0.112162
	138	5179.9121	-0.001697	5179.4861	-0.009921	5179.8651	-0.026042

Limit:

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.



## **13. Automatically Discontinue Transmission**

### **13.1. Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **13.2. Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.