


Test Mode	IEEE 802.11ax (HEW80+80)_Internal Antenna	Test Date	2020/2/26
Test Frequency	CH42: 5210 MHz + CH155: 5775 MHz	Polarization	Horizontal

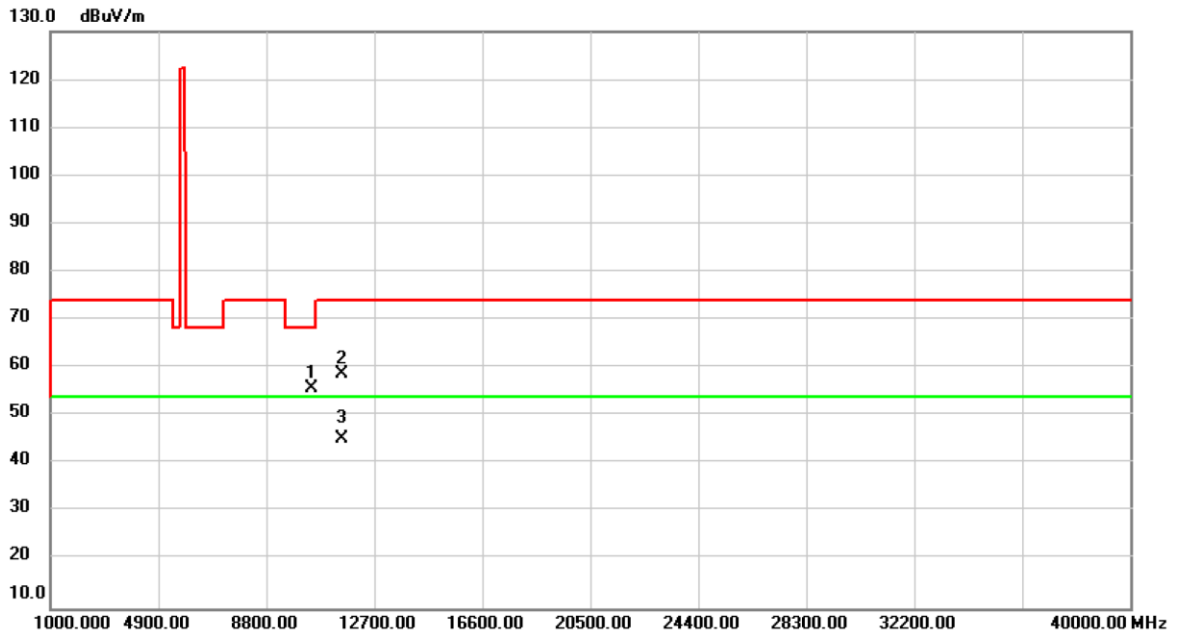


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	52.73	2.91	55.64	68.20	-12.56	peak	
2		11550.00	55.12	3.67	58.79	74.00	-15.21	peak	
3	*	11550.00	41.51	3.67	45.18	54.00	-8.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80+80)_Internal Antenna	Test Date	2020/2/26
Test Frequency	CH155: 5775 MHz + CH42: 5210 MHz	Polarization	Vertical

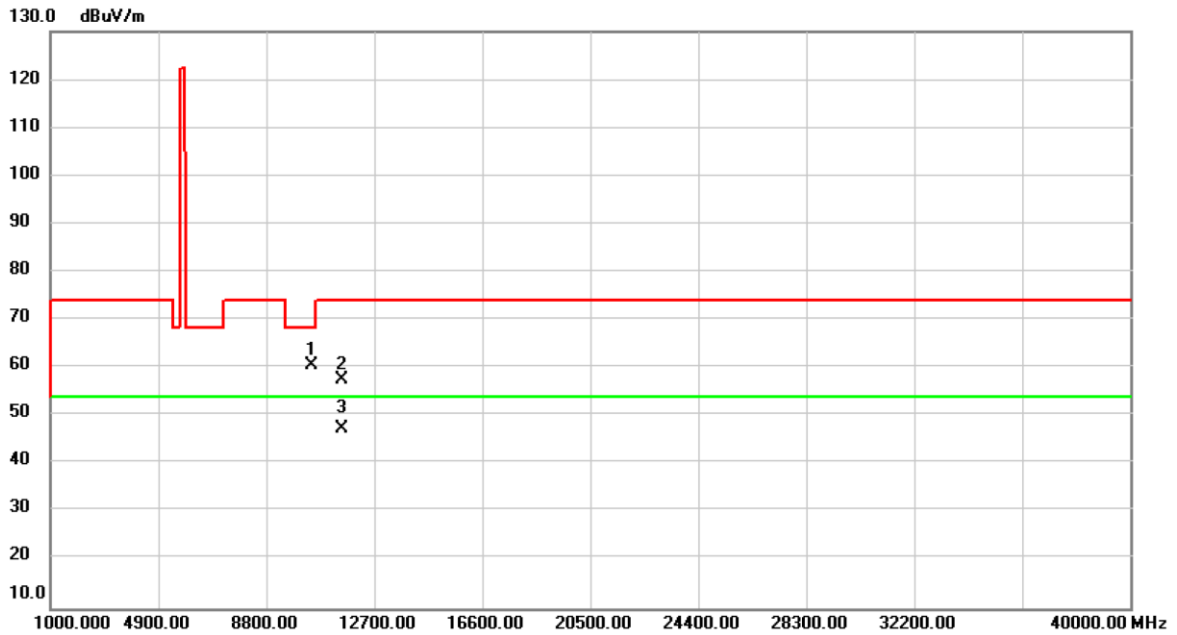


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	57.78	2.91	60.69	68.20	-7.51	peak	
2		11550.00	54.02	3.67	57.69	74.00	-16.31	peak	
3	*	11550.00	43.66	3.67	47.33	54.00	-6.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80+80)_Internal Antenna	Test Date	2020/2/26
Test Frequency	CH155: 5775 MHz + CH42: 5210 MHz	Polarization	Horizontal

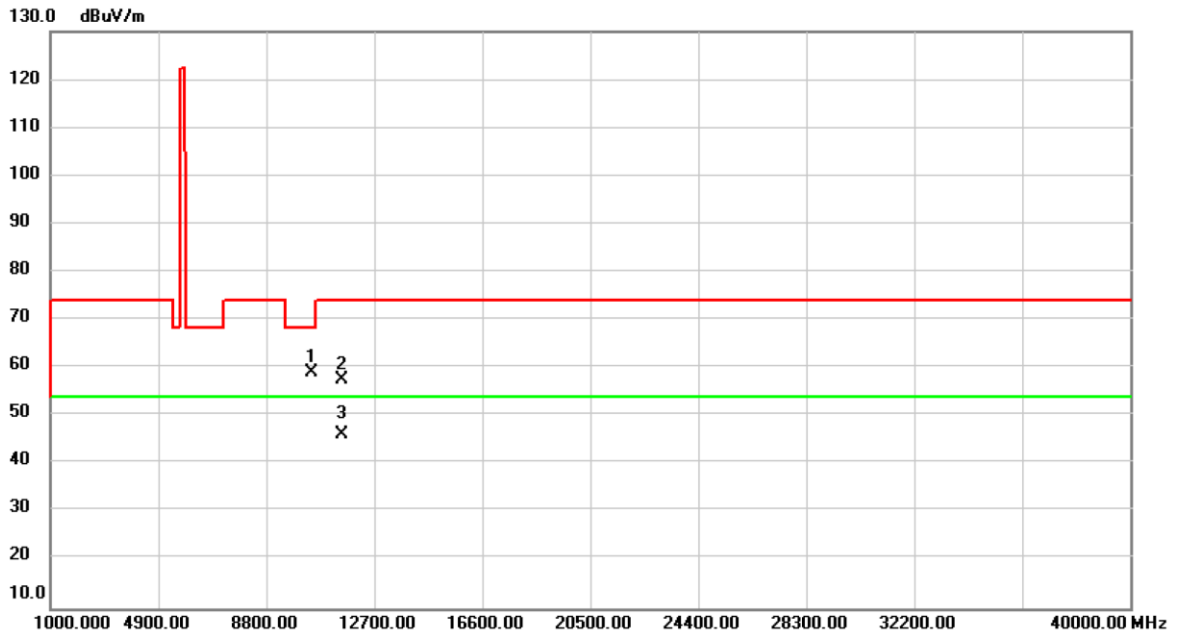


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	56.22	2.91	59.13	68.20	-9.07	peak	
2		11550.00	53.88	3.67	57.55	74.00	-16.45	peak	
3	*	11550.00	42.51	3.67	46.18	54.00	-7.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/28
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

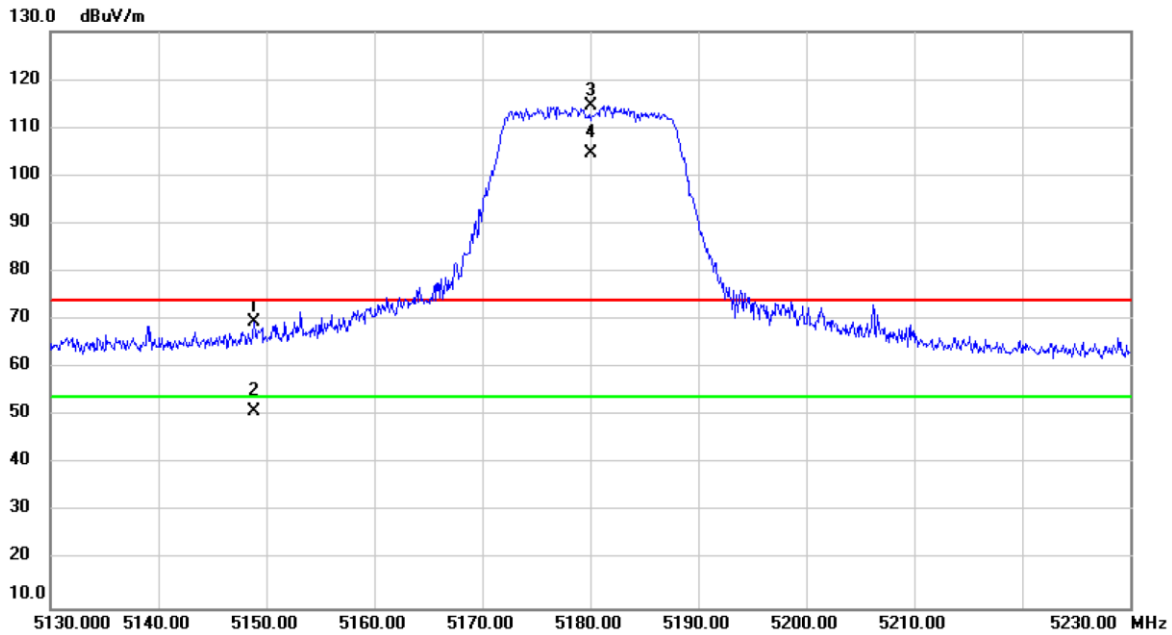


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.900	31.75	37.80	69.55	74.00	-4.45	peak	
2		5148.900	13.11	37.80	50.91	54.00	-3.09	AVG	
3	X	5180.000	76.65	37.83	114.48	74.00	40.48	peak	No Limit
4	*	5180.000	66.97	37.83	104.80	54.00	50.80	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/28
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

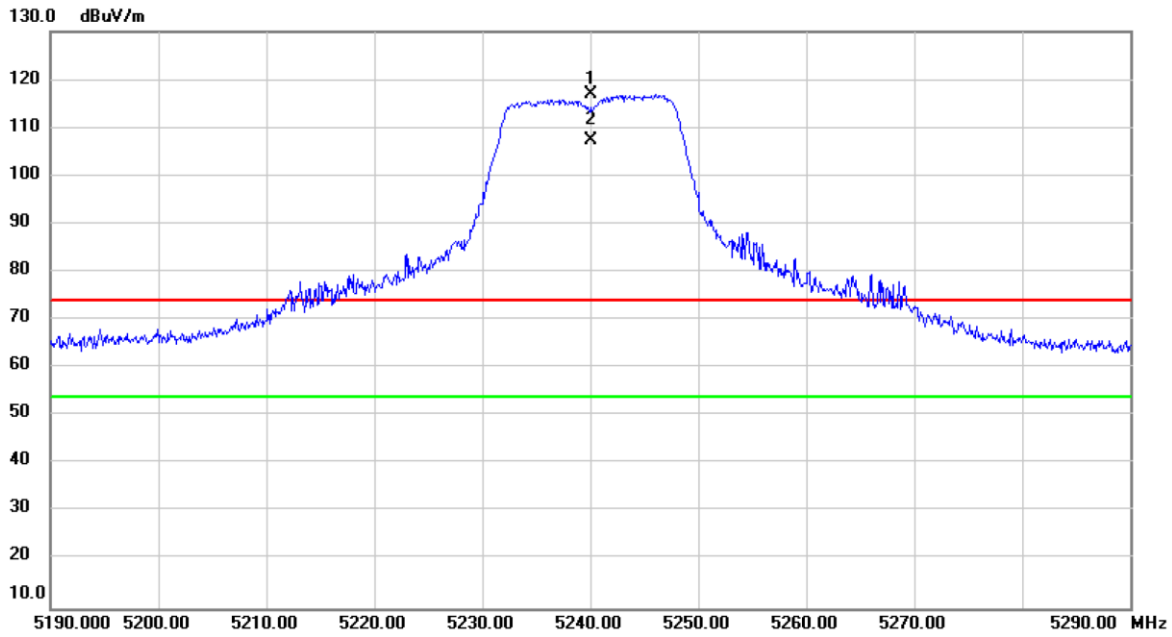


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5240.000	78.96	37.90	116.86	74.00	42.86	peak	No Limit
2	*	5240.000	69.55	37.90	107.45	54.00	53.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/28
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

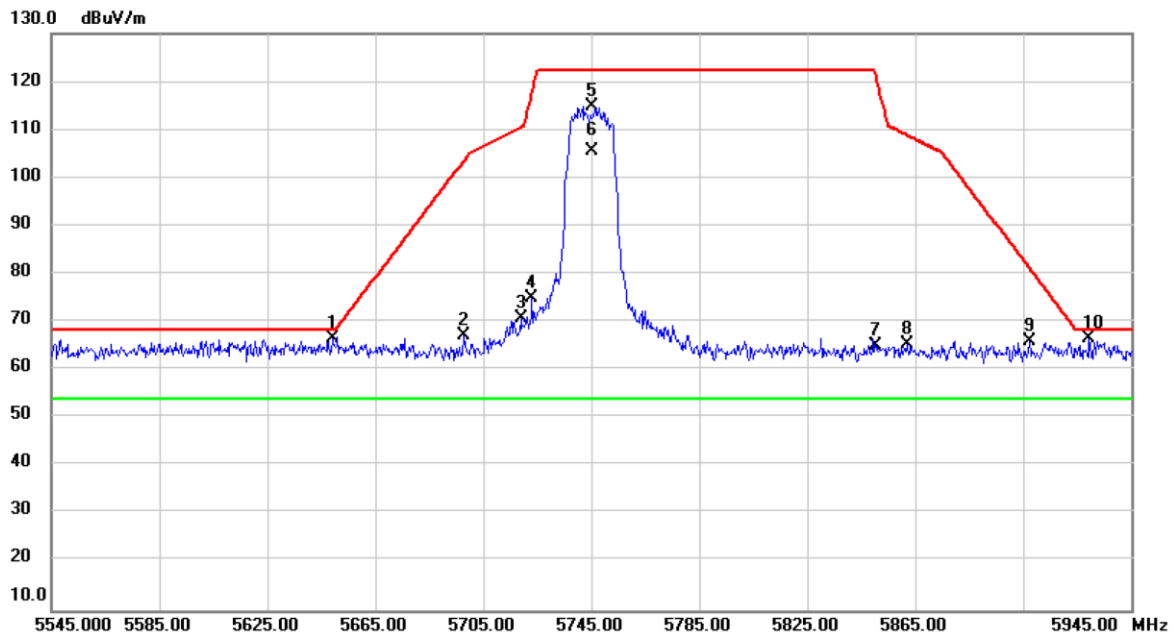


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5649.000	28.09	38.32	66.41	68.20	-1.79	peak	
2		5697.800	28.77	38.36	67.13	103.57	-36.44	peak	
3		5719.000	32.31	38.38	70.69	110.52	-39.83	peak	
4		5723.000	36.70	38.37	75.07	117.64	-42.57	peak	
5		5745.000	76.49	38.39	114.88	122.20	-7.32	peak	No Limit
6	*	5745.000	67.30	38.39	105.69	54.00	51.69	AVG	No Limit
7		5850.200	26.53	38.47	65.00	121.74	-56.74	peak	
8		5861.800	26.76	38.48	65.24	108.90	-43.66	peak	
9		5907.400	27.49	38.51	66.00	81.22	-15.22	peak	
10		5929.400	27.97	38.53	66.50	68.20	-1.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/28
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

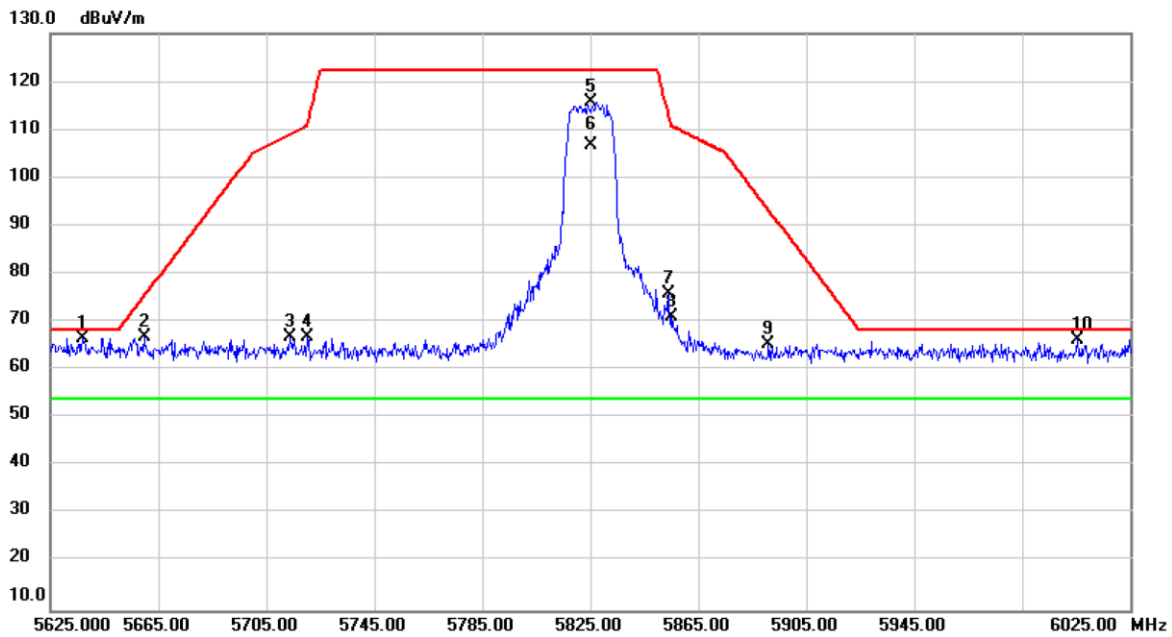


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5637.000	28.36	38.31	66.67	68.20	-1.53	peak	
2		5659.800	28.63	38.32	66.95	75.45	-8.50	peak	
3		5713.800	28.38	38.37	66.75	109.06	-42.31	peak	
4		5720.200	28.44	38.37	66.81	111.26	-44.45	peak	
5		5825.000	77.39	38.46	115.85	122.20	-6.35	peak	No Limit
6	*	5825.000	68.32	38.46	106.78	54.00	52.78	AVG	No Limit
7		5853.800	37.22	38.48	75.70	113.54	-37.84	peak	
8		5855.400	32.60	38.48	71.08	110.69	-39.61	peak	
9		5891.000	26.86	38.50	65.36	93.36	-28.00	peak	
10		6005.400	27.53	38.61	66.14	68.20	-2.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

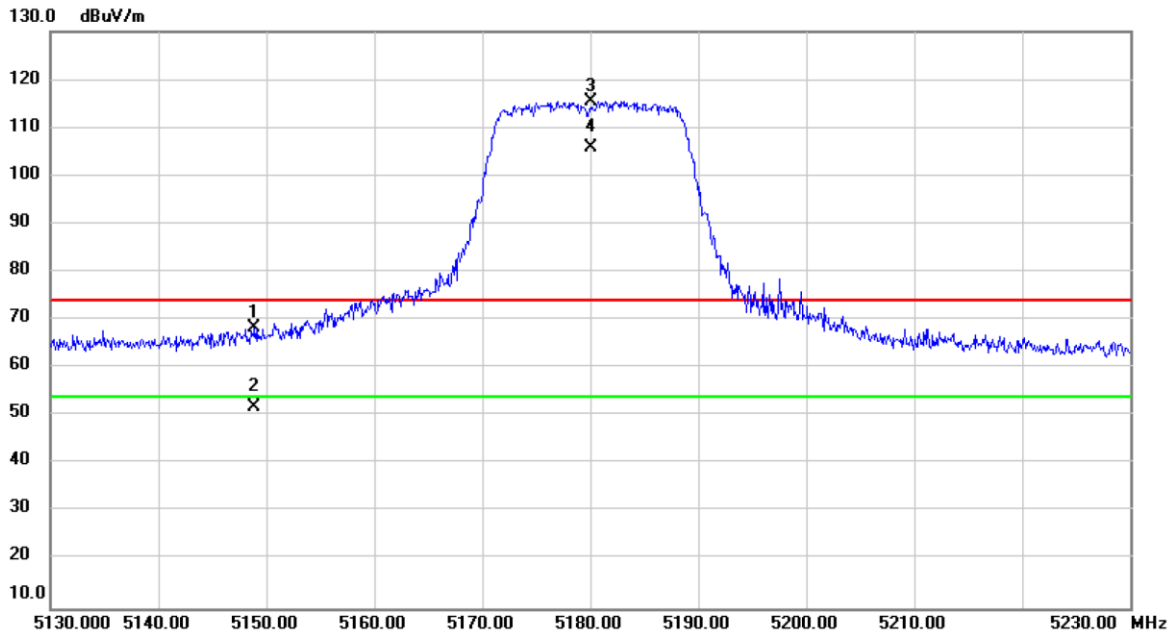


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.900	30.53	37.80	68.33	74.00	-5.67	peak	
2		5148.900	14.08	37.80	51.88	54.00	-2.12	AVG	
3	X	5180.000	77.64	37.83	115.47	74.00	41.47	peak	No Limit
4	*	5180.000	67.91	37.83	105.74	54.00	51.74	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

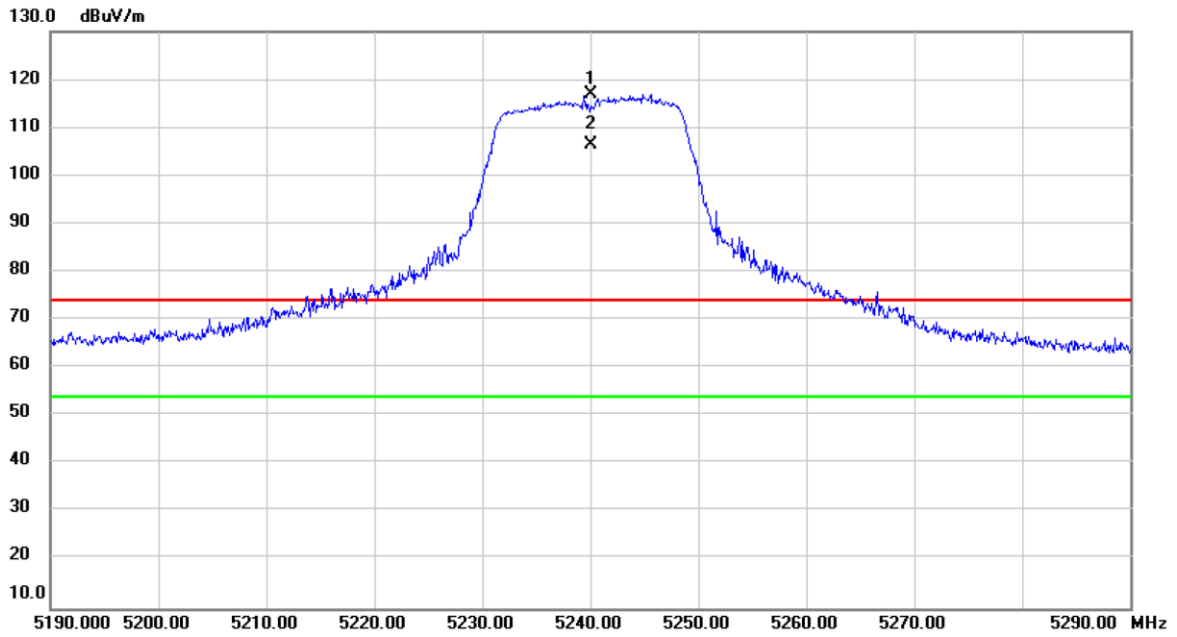


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	79.07	37.90	116.97	74.00	42.97	peak	No Limit
2	*	5240.000	68.50	37.90	106.40	54.00	52.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

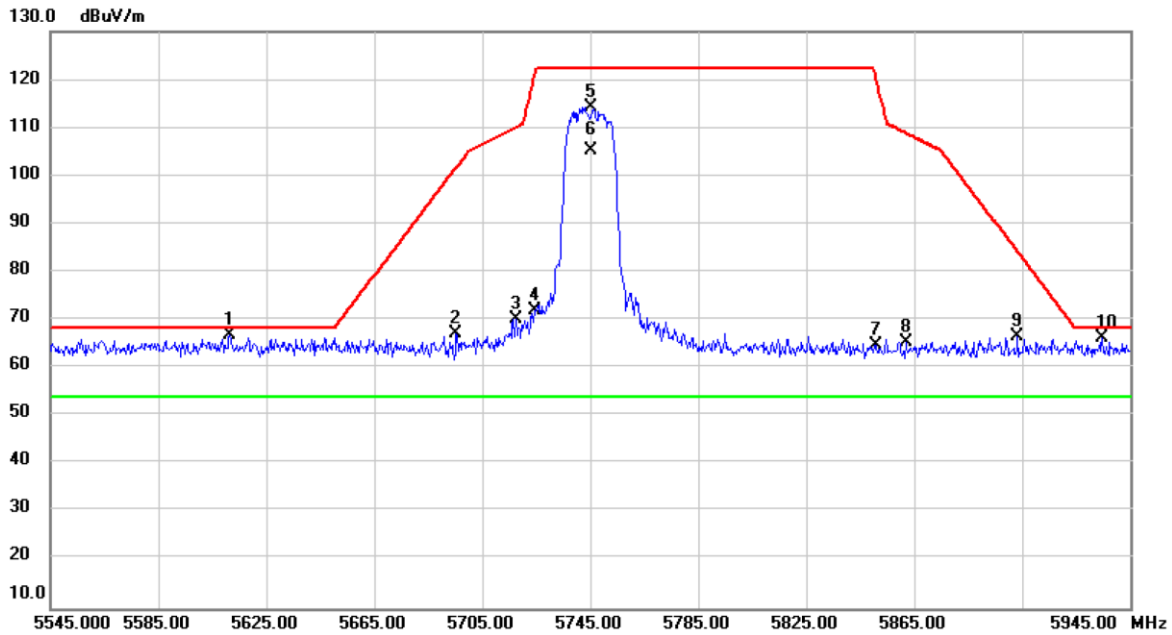


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5611.400	28.53	38.30	66.83	68.20	-1.37	peak	
2		5695.400	28.83	38.35	67.18	101.80	-34.62	peak	
3		5717.400	31.79	38.37	70.16	110.07	-39.91	peak	
4		5724.600	33.63	38.37	72.00	121.29	-49.29	peak	
5		5745.000	75.86	38.39	114.25	122.20	-7.95	peak	No Limit
6	*	5745.000	66.79	38.39	105.18	54.00	51.18	AVG	No Limit
7		5850.600	26.40	38.47	64.87	120.83	-55.96	peak	
8		5861.800	26.82	38.48	65.30	108.90	-43.60	peak	
9		5903.400	27.93	38.50	66.43	84.18	-17.75	peak	
10		5934.600	27.62	38.53	66.15	68.20	-2.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

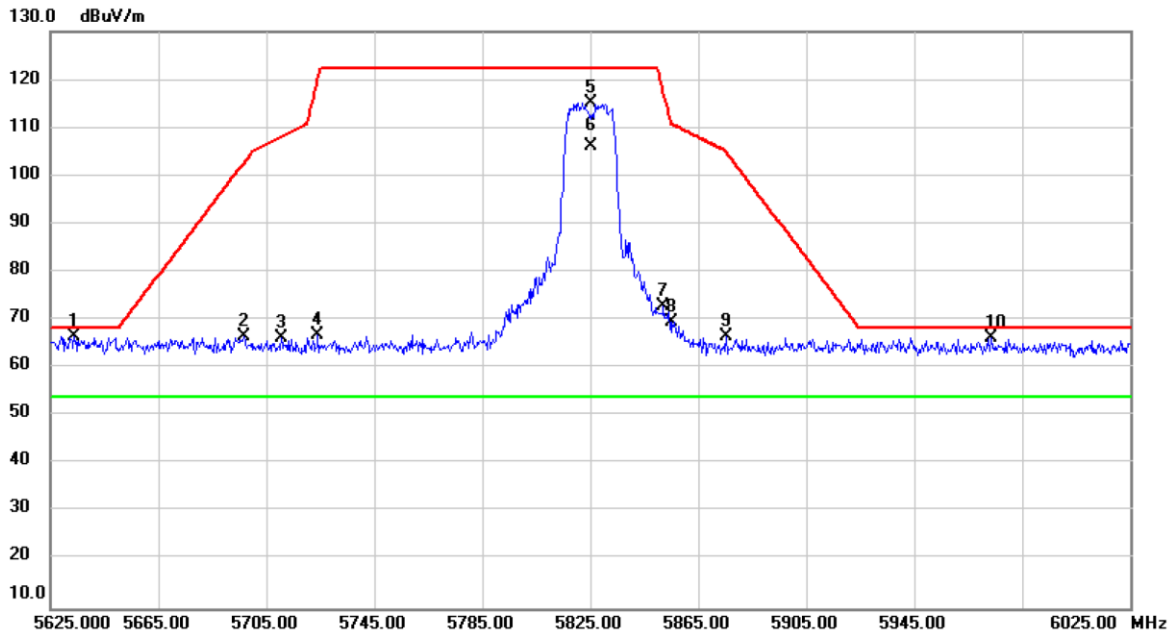


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5633.800	28.16	38.31	66.47	68.20	-1.73	peak	
2		5696.600	28.10	38.36	66.46	102.68	-36.22	peak	
3		5710.600	27.88	38.36	66.24	108.17	-41.93	peak	
4		5724.200	28.51	38.37	66.88	120.38	-53.50	peak	
5		5825.000	76.78	38.46	115.24	122.20	-6.96	peak	No Limit
6	*	5825.000	67.61	38.46	106.07	54.00	52.07	AVG	No Limit
7		5852.200	34.44	38.47	72.91	117.18	-44.27	peak	
8		5855.400	30.97	38.48	69.45	110.69	-41.24	peak	
9		5875.400	27.98	38.49	66.47	104.90	-38.43	peak	
10		5973.400	27.62	38.56	66.18	68.20	-2.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_External Antenna	Test Date	2019/11/28
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

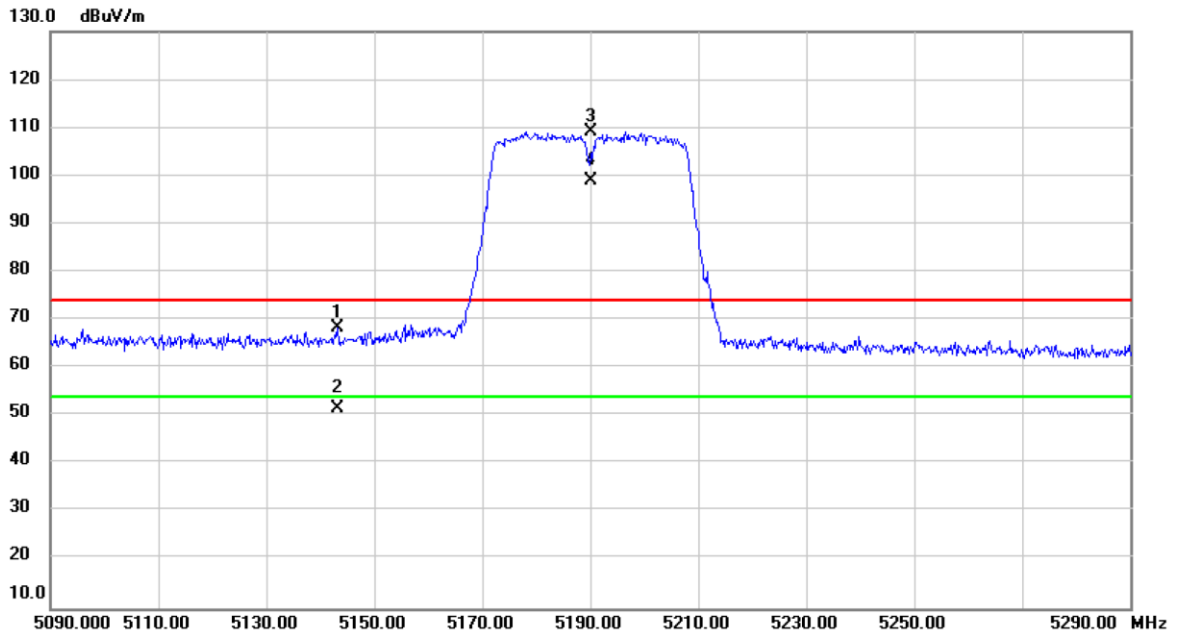


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5143.200	30.42	37.79	68.21	74.00	-5.79	peak	
2		5143.200	13.75	37.79	51.54	54.00	-2.46	AVG	
3	X	5190.000	71.29	37.84	109.13	74.00	35.13	peak	No Limit
4	*	5190.000	61.25	37.84	99.09	54.00	45.09	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_External Antenna	Test Date	2019/11/28
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

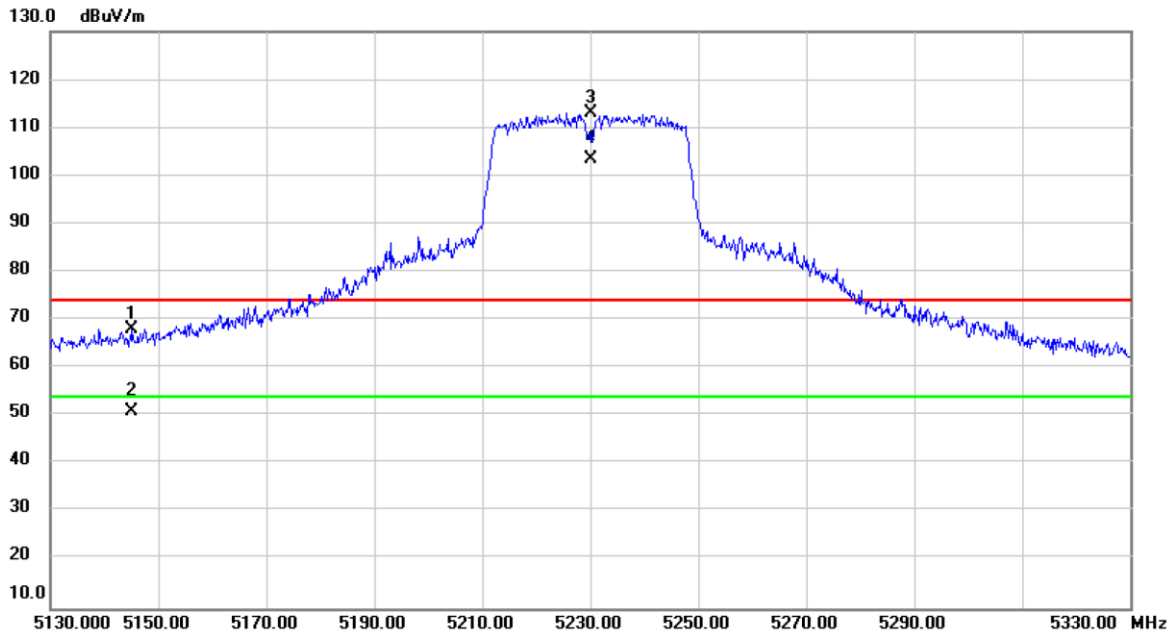


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.200	30.30	37.79	68.09	74.00	-5.91	peak	
2		5145.200	13.23	37.79	51.02	54.00	-2.98	AVG	
3	X	5230.000	75.17	37.89	113.06	74.00	39.06	peak	No Limit
4	*	5230.000	65.49	37.89	103.38	54.00	49.38	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_External Antenna	Test Date	2019/11/28
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

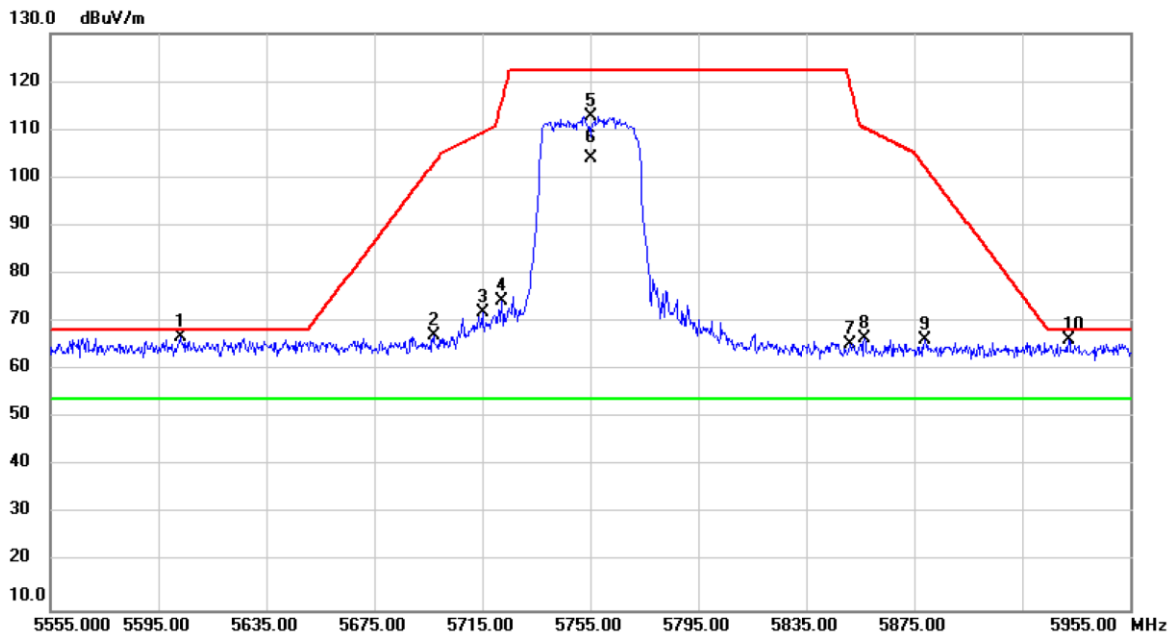


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5603.000	28.50	38.28	66.78	68.20	-1.42	peak	
2		5697.000	28.84	38.36	67.20	102.98	-35.78	peak	
3		5715.000	33.54	38.37	71.91	109.40	-37.49	peak	
4		5722.200	36.10	38.37	74.47	115.82	-41.35	peak	
5		5755.000	74.28	38.40	112.68	122.20	-9.52	peak	No Limit
6	*	5755.000	65.52	38.40	103.92	54.00	49.92	AVG	No Limit
7		5851.000	27.00	38.47	65.47	119.92	-54.45	peak	
8		5856.600	28.15	38.47	66.62	110.35	-43.73	peak	
9		5879.000	27.82	38.49	66.31	102.24	-35.93	peak	
10		5932.200	27.64	38.53	66.17	68.20	-2.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_External Antenna	Test Date	2019/11/28
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

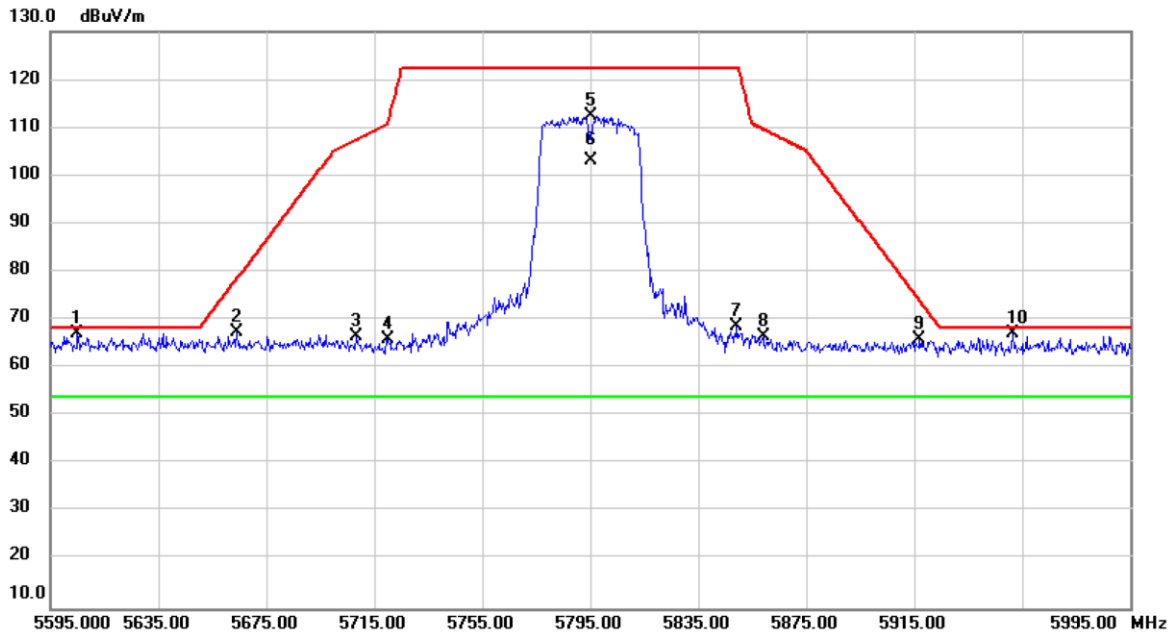


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5605.000	28.81	38.29	67.10	68.20	-1.10	peak	
2		5663.800	29.11	38.33	67.44	78.41	-10.97	peak	
3		5708.200	28.05	38.36	66.41	107.50	-41.09	peak	
4		5719.800	27.45	38.37	65.82	110.74	-44.92	peak	
5		5795.000	73.95	38.43	112.38	122.20	-9.82	peak	No Limit
6	*	5795.000	64.84	38.43	103.27	54.00	49.27	AVG	No Limit
7		5849.400	30.23	38.47	68.70	122.20	-53.50	peak	
8		5859.000	28.08	38.47	66.55	109.68	-43.13	peak	
9		5917.000	27.41	38.51	65.92	74.12	-8.20	peak	
10		5951.400	28.48	38.54	67.02	68.20	-1.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)_External Antenna	Test Date	2019/11/28
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

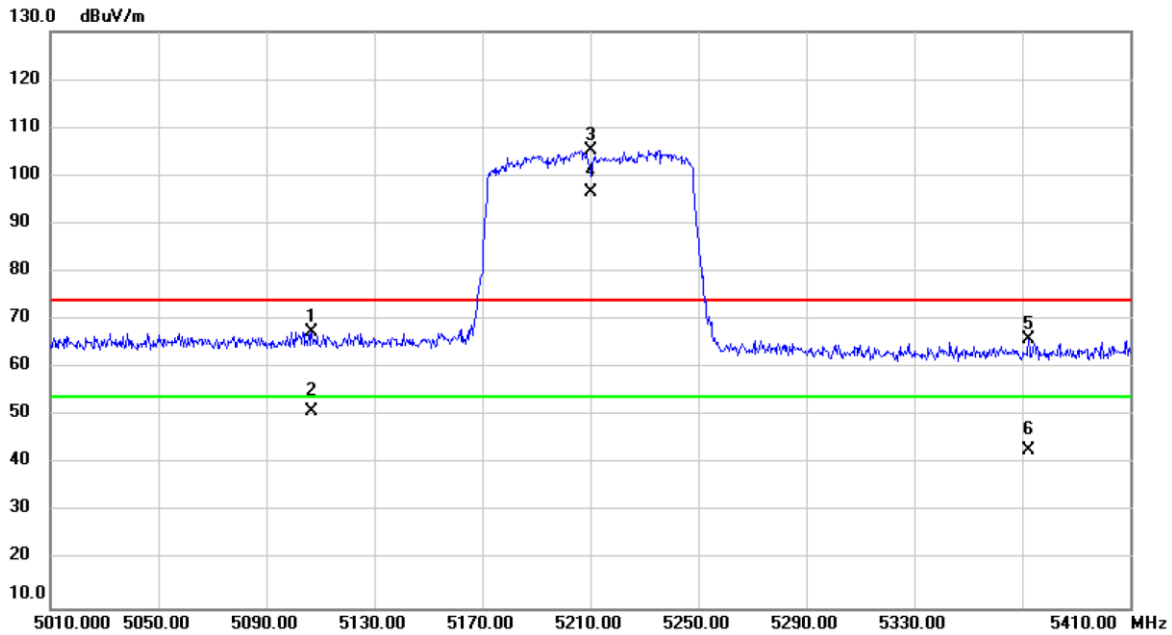


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5106.800	29.85	37.74	67.59	74.00	-6.41	peak	
2		5106.800	13.17	37.74	50.91	54.00	-3.09	AVG	
3	X	5210.000	67.47	37.87	105.34	74.00	31.34	peak	No Limit
4	*	5210.000	58.76	37.87	96.63	54.00	42.63	AVG	No Limit
5		5372.400	27.79	38.06	65.85	74.00	-8.15	peak	
6		5372.400	4.81	38.06	42.87	54.00	-11.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)_External Antenna	Test Date	2019/11/28
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

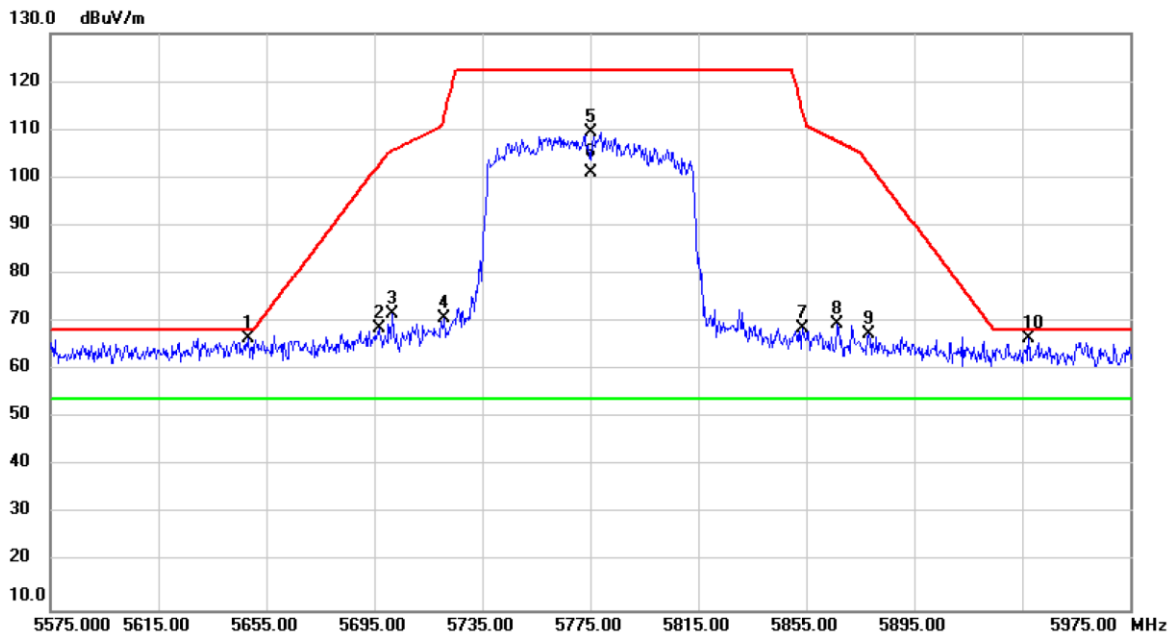


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.200	28.21	38.32	66.53	68.20	-1.67	peak	
2		5696.600	30.23	38.36	68.59	102.68	-34.09	peak	
3		5701.800	33.23	38.36	71.59	105.70	-34.11	peak	
4		5721.000	32.27	38.37	70.64	113.08	-42.44	peak	
5		5775.000	71.00	38.41	109.41	122.20	-12.79	peak	No Limit
6	*	5775.000	62.57	38.41	100.98	54.00	46.98	AVG	No Limit
7		5853.800	30.21	38.48	68.69	113.54	-44.85	peak	
8		5866.600	31.21	38.48	69.69	107.55	-37.86	peak	
9		5878.200	29.11	38.49	67.60	102.83	-35.23	peak	
10		5937.400	27.94	38.53	66.47	68.20	-1.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

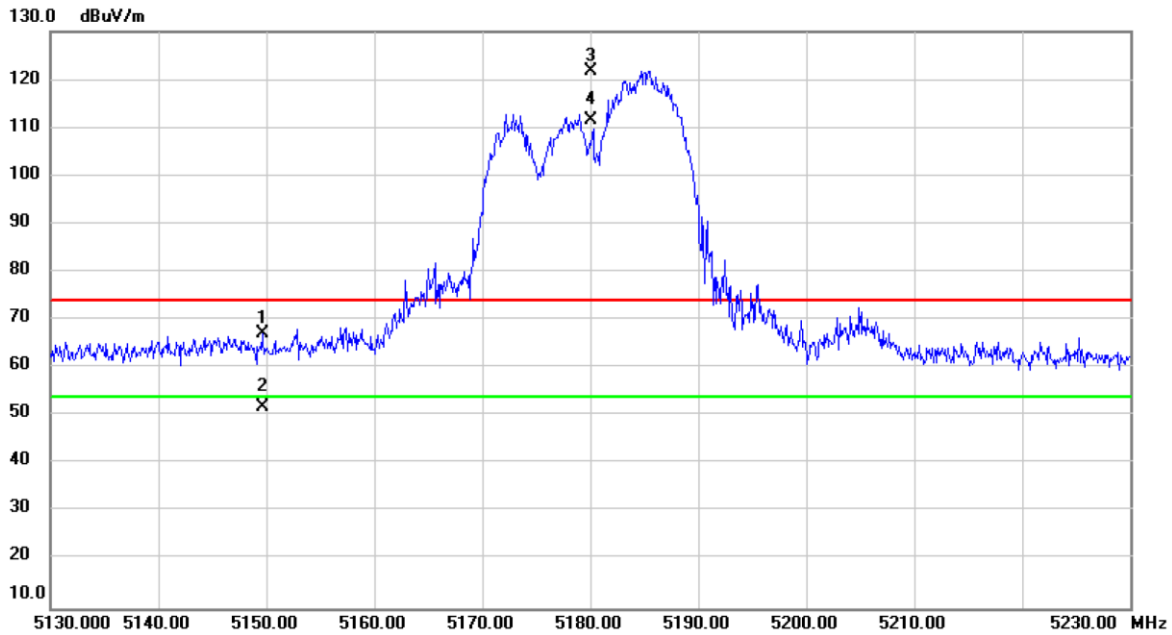


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.600	29.33	37.80	67.13	74.00	-6.87	peak	
2		5149.600	14.03	37.80	51.83	54.00	-2.17	AVG	
3	X	5180.000	84.06	37.83	121.89	74.00	47.89	peak	No Limit
4	*	5180.000	73.72	37.83	111.55	54.00	57.55	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

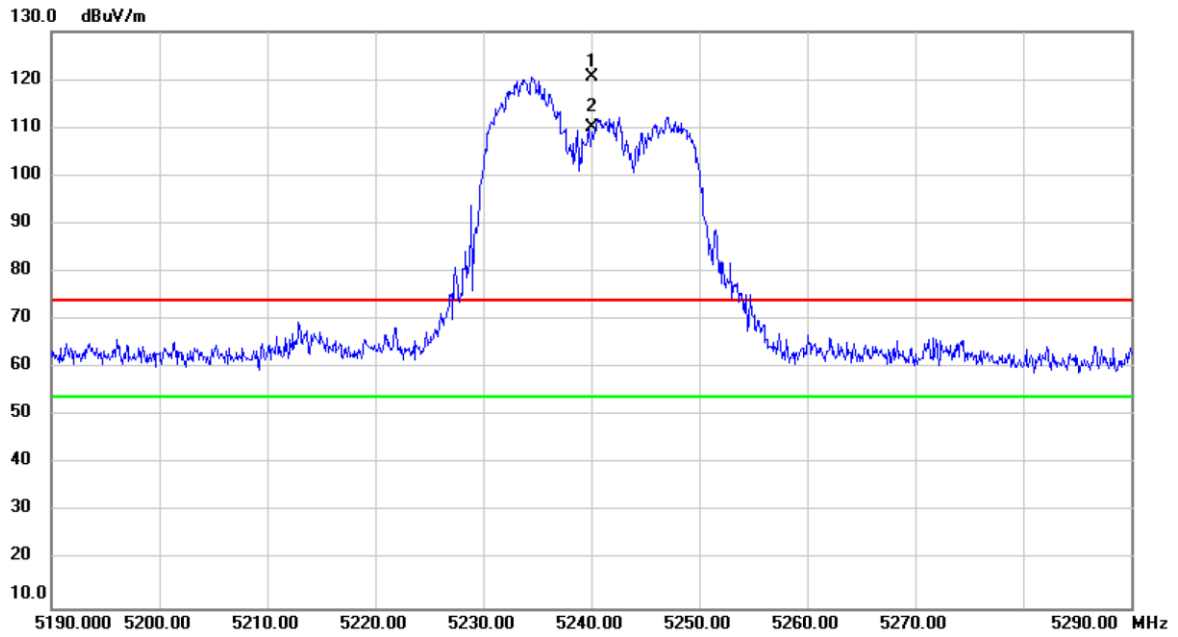


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5240.000	82.52	37.90	120.42	74.00	46.42	peak	No Limit
2	*	5240.000	72.03	37.90	109.93	54.00	55.93	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

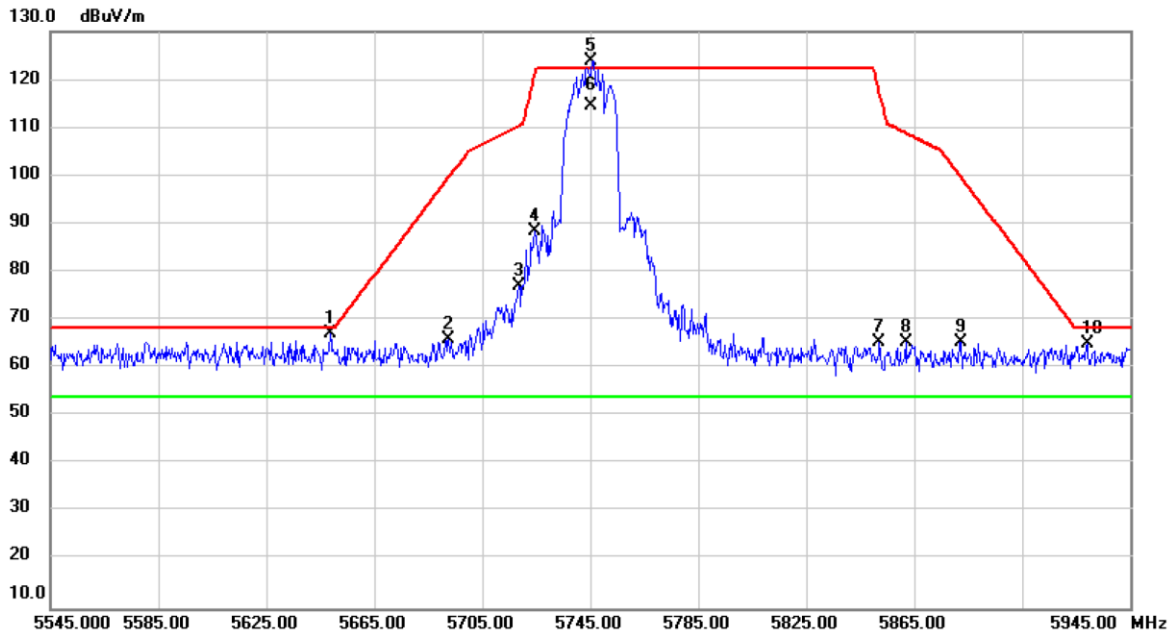


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.600	28.78	38.32	67.10	68.20	-1.10	peak	
2		5692.600	27.50	38.35	65.85	99.72	-33.87	peak	
3		5718.600	38.62	38.38	77.00	110.41	-33.41	peak	
4		5724.600	50.08	38.37	88.45	121.29	-32.84	peak	
5	X	5745.000	85.40	38.39	123.79	122.20	1.59	peak	No Limit
6	*	5745.000	76.25	38.39	114.64	54.00	60.64	AVG	No Limit
7		5852.200	26.99	38.47	65.46	117.18	-51.72	peak	
8		5861.800	26.84	38.48	65.32	108.90	-43.58	peak	
9		5882.200	26.93	38.50	65.43	99.87	-34.44	peak	
10		5929.000	26.52	38.53	65.05	68.20	-3.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

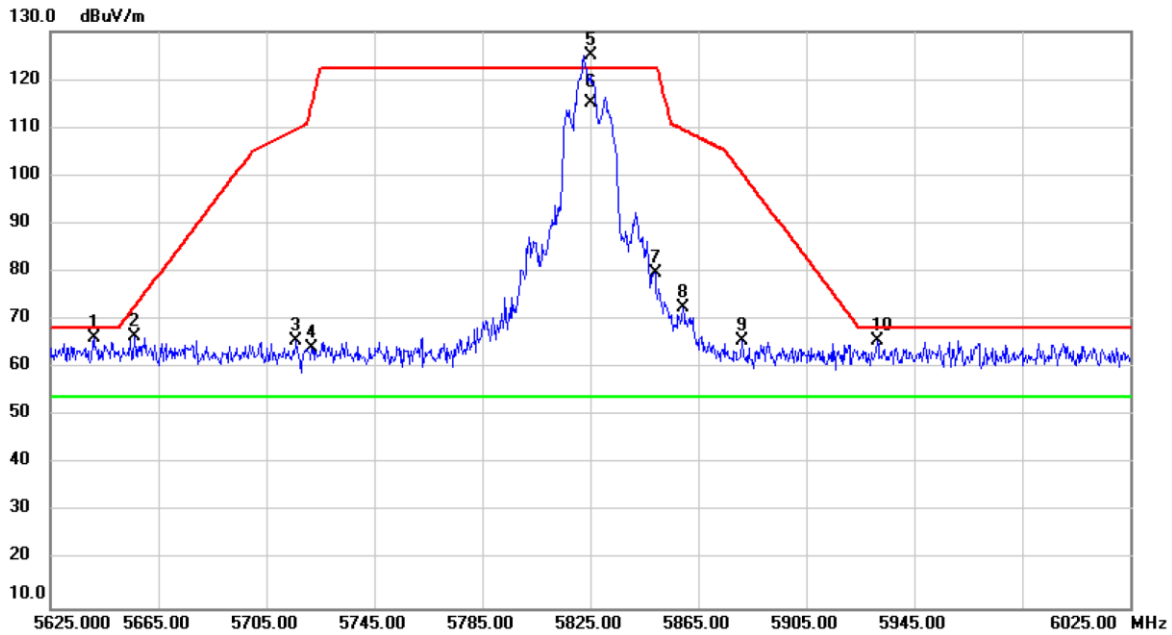


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5641.000	27.89	38.32	66.21	68.20	-1.99	peak	
2	X	5656.200	28.31	38.33	66.64	72.79	-6.15	peak	
3	X	5716.200	27.29	38.37	65.66	109.74	-44.08	peak	
4	X	5721.800	25.91	38.37	64.28	114.90	-50.62	peak	
5	X	5825.000	86.56	38.46	125.02	122.20	2.82	peak	No Limit
6	*	5825.000	76.77	38.46	115.23	54.00	61.23	AVG	No Limit
7	X	5849.000	41.32	38.47	79.79	122.20	-42.41	peak	
8	X	5859.400	34.01	38.47	72.48	109.57	-37.09	peak	
9	X	5881.400	27.18	38.49	65.67	100.46	-34.79	peak	
10	X	5931.400	27.23	38.53	65.76	68.20	-2.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

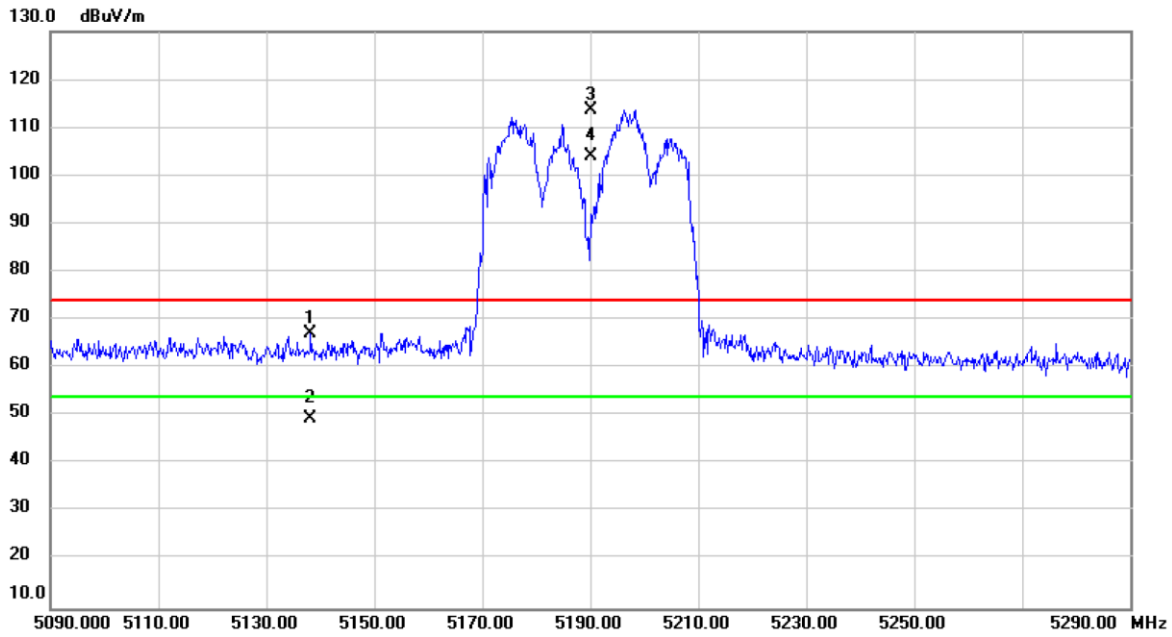


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5138.200	29.33	37.78	67.11	74.00	-6.89	peak	
2		5138.200	11.67	37.78	49.45	54.00	-4.55	AVG	
3	X	5190.000	75.75	37.84	113.59	74.00	39.59	peak	No Limit
4	*	5190.000	66.16	37.84	104.00	54.00	50.00	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

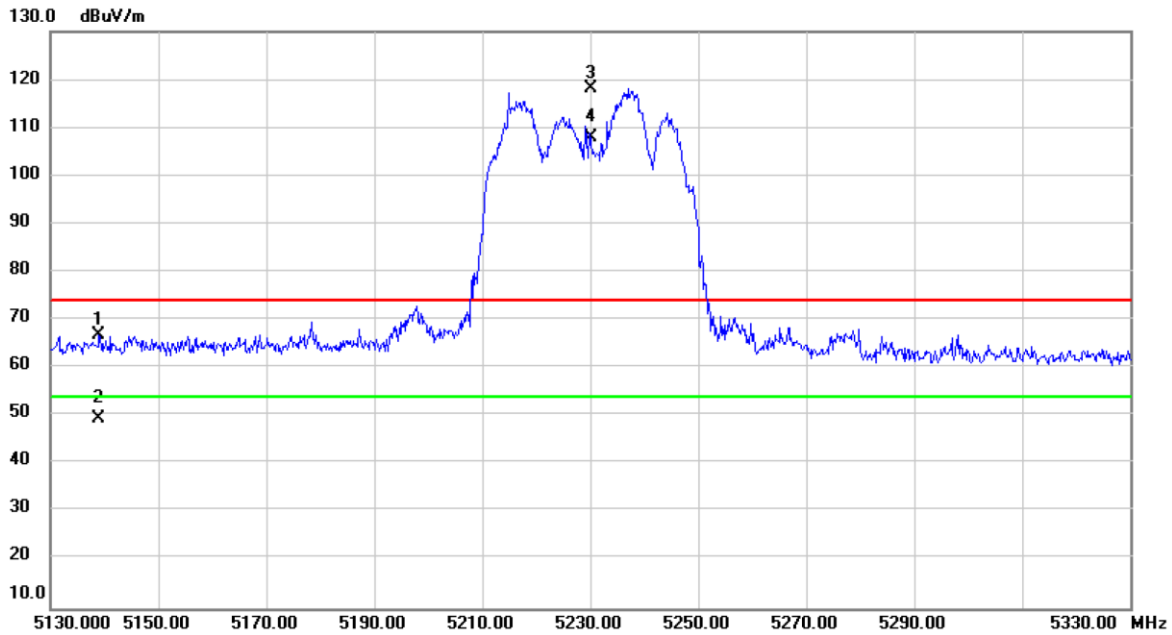

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5139.000	28.96	37.78	66.74	74.00	-7.26	peak	
2		5139.000	11.57	37.78	49.35	54.00	-4.65	AVG	
3	X	5230.000	80.20	37.89	118.09	74.00	44.09	peak	No Limit
4	*	5230.000	70.05	37.89	107.94	54.00	53.94	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH151: 5755 MHz	Polarization	Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5619.000	27.83	38.30	66.13	68.20	-2.07	peak	
2		5692.600	35.56	38.35	73.91	99.72	-25.81	peak	
3		5719.800	48.03	38.37	86.40	110.74	-24.34	peak	
4		5722.600	52.92	38.37	91.29	116.73	-25.44	peak	
5		5755.000	83.60	38.40	122.00	122.20	-0.20	peak	No Limit
6	*	5755.000	75.40	38.40	113.80	54.00	59.80	AVG	No Limit
7		5852.200	29.19	38.47	67.66	117.18	-49.52	peak	
8		5867.800	28.89	38.48	67.37	107.22	-39.85	peak	
9		5896.600	27.28	38.51	65.79	89.22	-23.43	peak	
10		5924.200	27.76	38.52	66.28	68.79	-2.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

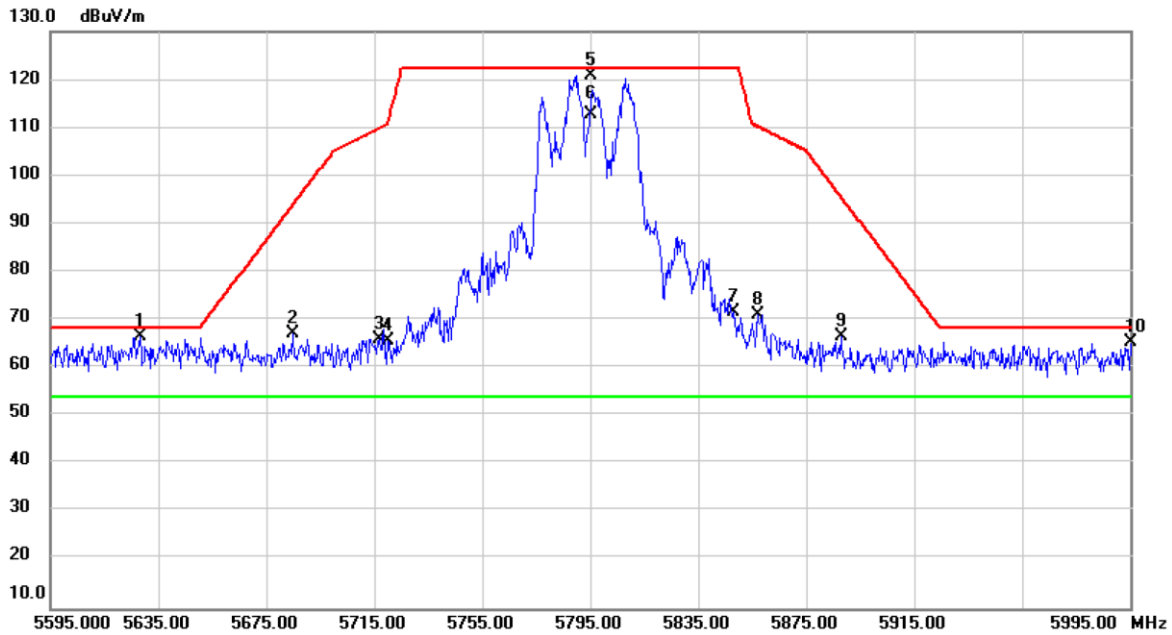


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5628.200	28.14	38.31	66.45	68.20	-1.75	peak	
2		5684.600	28.76	38.35	67.11	93.80	-26.69	peak	
3		5716.600	27.73	38.37	66.10	109.85	-43.75	peak	
4		5719.800	27.30	38.37	65.67	110.74	-45.07	peak	
5		5795.000	82.37	38.43	120.80	122.20	-1.40	peak	No Limit
6	*	5795.000	74.20	38.43	112.63	54.00	58.63	AVG	No Limit
7		5848.200	33.33	38.47	71.80	122.20	-50.40	peak	
8		5857.000	32.70	38.47	71.17	110.24	-39.07	peak	
9		5887.800	27.92	38.49	66.41	95.73	-29.32	peak	
10		5995.000	26.78	38.57	65.35	68.20	-2.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)_External Antenna	Test Date	2019/12/11
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

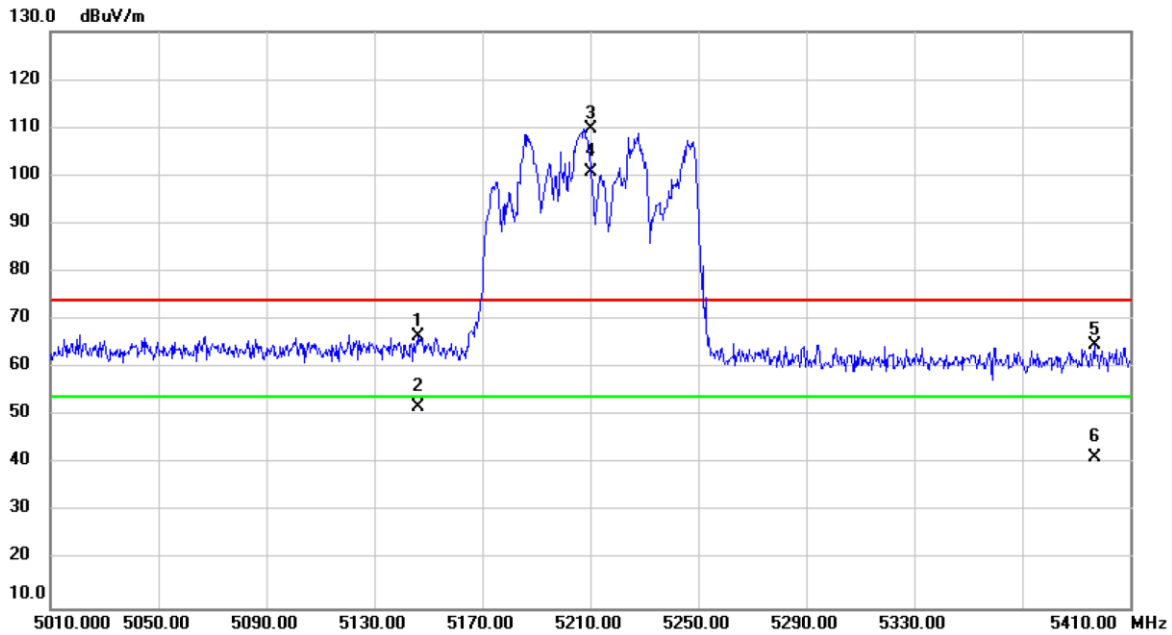


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.400	28.61	37.79	66.40	74.00	-7.60	peak	
2		5146.400	14.12	37.79	51.91	54.00	-2.09	AVG	
3	X	5210.000	71.95	37.87	109.82	74.00	35.82	peak	No Limit
4	*	5210.000	63.01	37.87	100.88	54.00	46.88	AVG	No Limit
5		5396.800	26.69	38.09	64.78	74.00	-9.22	peak	
6		5396.800	3.23	38.09	41.32	54.00	-12.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)_External Antenna	Test Date	2019/12/11
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

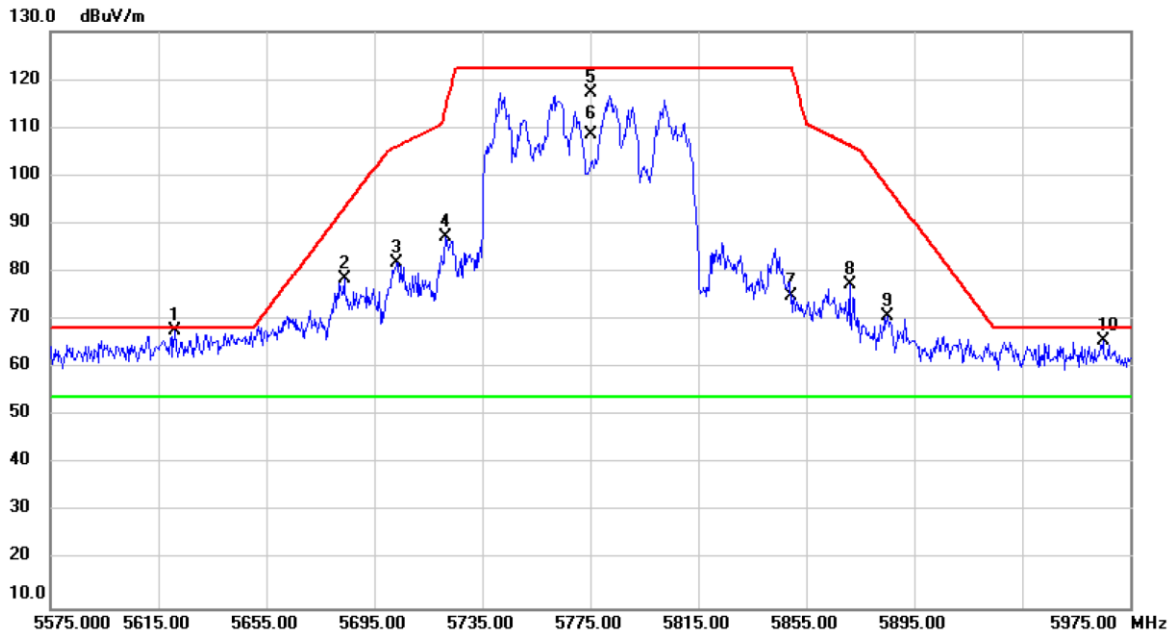


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5621.400	29.41	38.30	67.71	68.20	-0.49	peak	
2		5683.800	40.23	38.35	78.58	93.21	-14.63	peak	
3		5703.400	43.57	38.36	81.93	106.15	-24.22	peak	
4		5721.400	48.83	38.37	87.20	113.99	-26.79	peak	
5		5775.000	78.81	38.41	117.22	122.20	-4.98	peak	No Limit
6	*	5775.000	70.14	38.41	108.55	54.00	54.55	AVG	No Limit
7		5849.400	36.46	38.47	74.93	122.20	-47.27	peak	
8		5871.000	38.72	38.49	77.21	106.32	-29.11	peak	
9		5885.400	32.36	38.50	70.86	97.50	-26.64	peak	
10		5965.000	27.04	38.55	65.59	68.20	-2.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH42: 5210 MHz + CH155: 5775 MHz	Polarization	Vertical

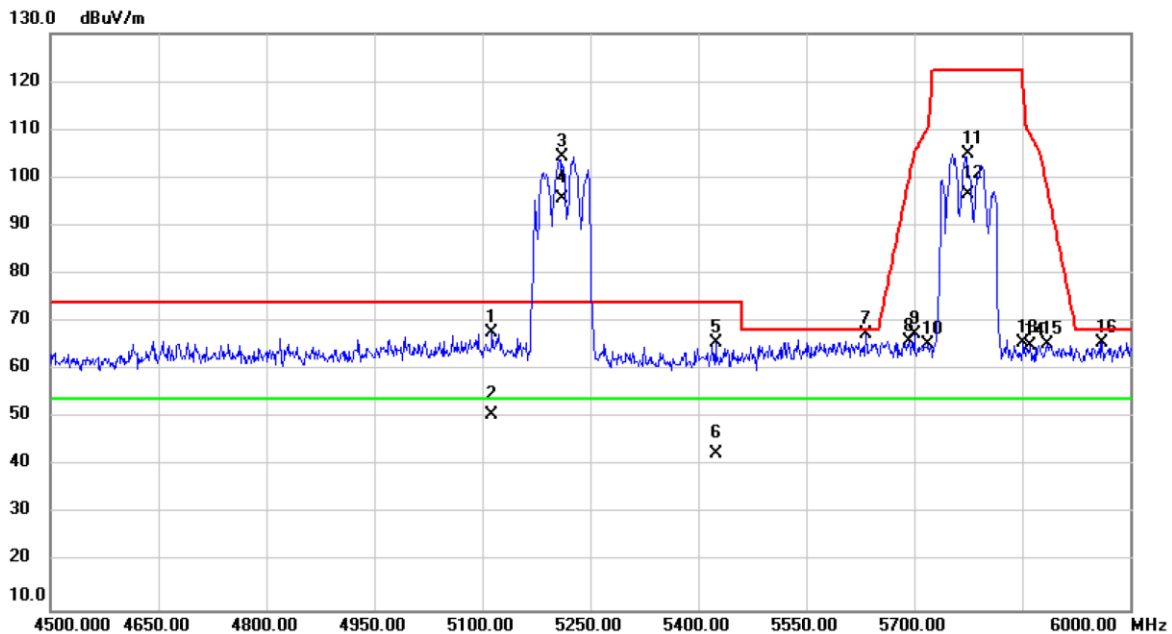


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5113.500	29.88	37.76	67.64	74.00	-6.36	peak	
2		5113.500	12.80	37.76	50.56	54.00	-3.44	AVG	
3	X	5210.000	66.36	37.87	104.23	74.00	30.23	peak	No Limit
4	X	5210.000	57.93	37.87	95.80	54.00	41.80	AVG	No Limit
5		5424.000	27.41	38.12	65.53	74.00	-8.47	peak	
6		5424.000	4.44	38.12	42.56	54.00	-11.44	AVG	
7		5632.500	29.00	38.31	67.31	68.20	-0.89	peak	
8		5692.500	27.68	38.35	66.03	99.65	-33.62	peak	
9		5700.000	29.01	38.36	67.37	105.20	-37.83	peak	
10		5719.500	27.04	38.38	65.42	110.66	-45.24	peak	
11		5775.000	66.67	38.41	105.08	122.20	-17.12	peak	No Limit
12	*	5775.000	58.26	38.41	96.67	54.00	42.67	AVG	No Limit
13		5851.500	27.19	38.47	65.66	118.78	-53.12	peak	
14		5860.500	26.55	38.47	65.02	109.26	-44.24	peak	
15		5884.500	26.85	38.50	65.35	98.17	-32.82	peak	
16		5961.000	27.21	38.56	65.77	68.20	-2.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH155: 5775 MHz + CH42: 5210 MHz	Polarization	Vertical

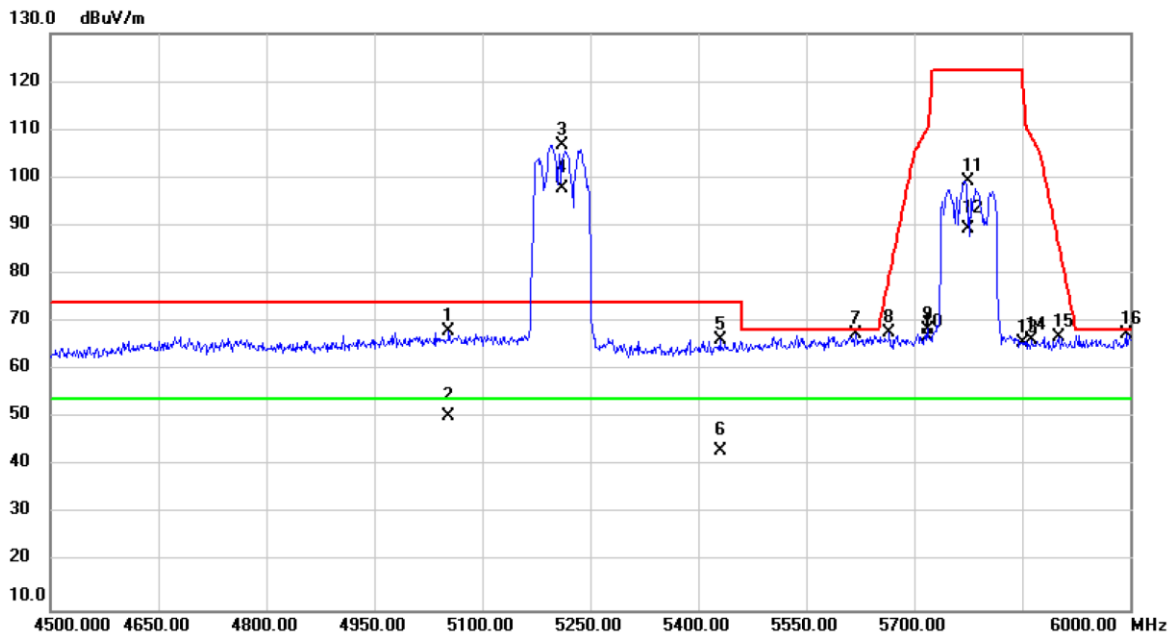


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5053.500	30.48	37.68	68.16	74.00	-5.84	peak	
2		5053.500	12.76	37.68	50.44	54.00	-3.56	AVG	
3	X	5210.000	69.00	37.87	106.87	74.00	32.87	peak	No Limit
4	*	5210.000	59.83	37.87	97.70	54.00	43.70	AVG	No Limit
5		5430.000	28.11	38.13	66.24	74.00	-7.76	peak	
6		5430.000	5.05	38.13	43.18	54.00	-10.82	AVG	
7		5619.000	29.22	38.30	67.52	68.20	-0.68	peak	
8		5665.500	29.42	38.33	67.75	79.67	-11.92	peak	
9		5718.000	30.12	38.38	68.50	110.24	-41.74	peak	
10		5719.500	28.62	38.38	67.00	110.66	-43.66	peak	
11		5775.000	60.94	38.41	99.35	122.20	-22.85	peak	No Limit
12	X	5775.000	51.08	38.41	89.49	54.00	35.49	AVG	No Limit
13		5850.000	27.20	38.47	65.67	122.20	-56.53	peak	
14		5863.500	27.79	38.48	66.27	108.42	-42.15	peak	
15		5901.000	28.43	38.51	66.94	85.96	-19.02	peak	
16		5994.000	28.78	38.57	67.35	68.20	-0.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80+80)_External Antenna	Test Date	2020/2/26
Test Frequency	CH42: 5210 MHz + CH155: 5775 MHz	Polarization	Vertical

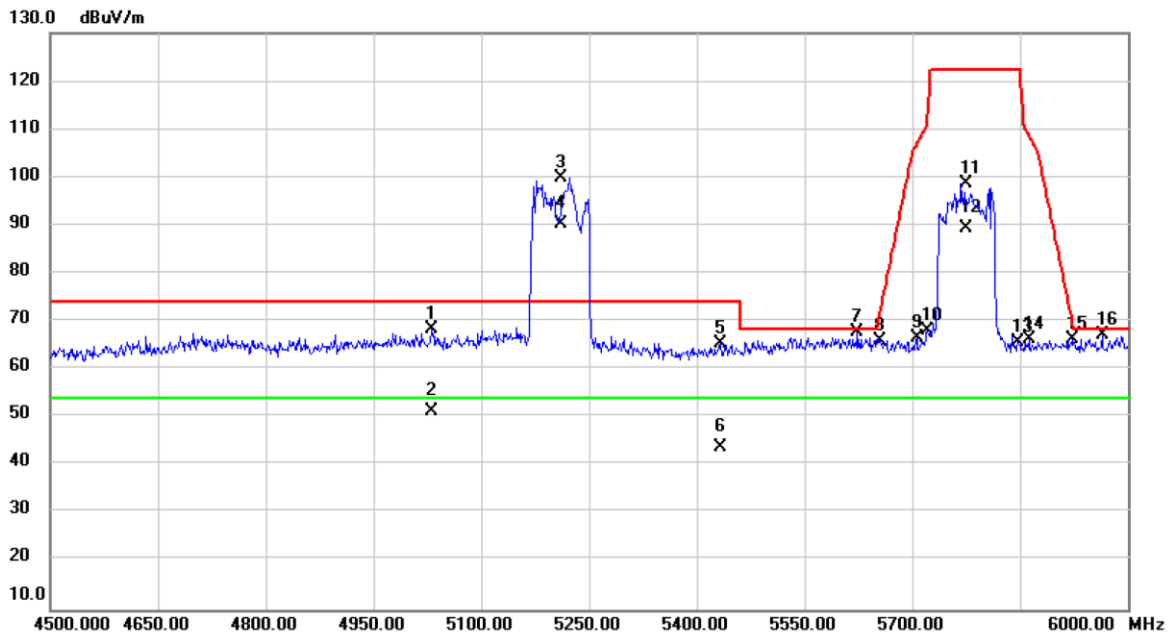


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5031.000	30.65	37.66	68.31	74.00	-5.69	peak	
2		5031.000	13.59	37.66	51.25	54.00	-2.75	AVG	
3	X	5210.000	62.01	37.87	99.88	74.00	25.88	peak	No Limit
4	*	5210.000	52.29	37.87	90.16	54.00	36.16	AVG	No Limit
5		5433.000	27.17	38.13	65.30	74.00	-8.70	peak	
6		5433.000	5.76	38.13	43.89	54.00	-10.11	AVG	
7		5623.500	29.48	38.30	67.78	68.20	-0.42	peak	
8		5655.000	27.66	38.33	65.99	71.90	-5.91	peak	
9		5706.000	28.21	38.36	66.57	106.88	-40.31	peak	
10		5721.000	29.56	38.37	67.93	113.08	-45.15	peak	
11		5775.000	60.11	38.41	98.52	122.20	-23.68	peak	No Limit
12	X	5775.000	50.85	38.41	89.26	54.00	35.26	AVG	No Limit
13		5847.000	27.11	38.47	65.58	122.20	-56.62	peak	
14		5862.000	27.76	38.48	66.24	108.84	-42.60	peak	
15		5923.500	27.82	38.52	66.34	69.31	-2.97	peak	
16		5964.000	28.59	38.55	67.14	68.20	-1.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH155: 5775 MHz + CH42: 5210 MHz	Polarization	Vertical

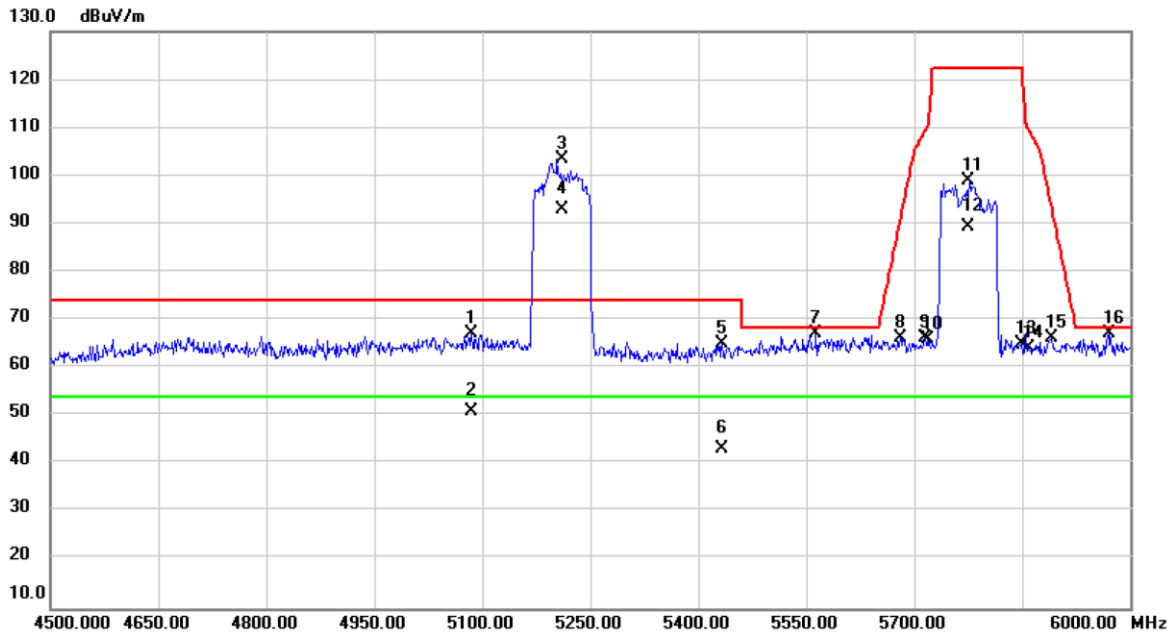


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5085.000	29.37	37.72	67.09	74.00	-6.91	peak	
2		5085.000	13.38	37.72	51.10	54.00	-2.90	AVG	
3	X	5210.000	65.56	37.87	103.43	74.00	29.43	peak	No Limit
4	*	5210.000	54.94	37.87	92.81	54.00	38.81	AVG	No Limit
5		5433.000	26.91	38.13	65.04	74.00	-8.96	peak	
6		5433.000	5.10	38.13	43.23	54.00	-10.77	AVG	
7		5563.500	28.87	38.26	67.13	68.20	-1.07	peak	
8		5680.500	27.81	38.34	66.15	90.77	-24.62	peak	
9		5715.000	27.91	38.37	66.28	109.40	-43.12	peak	
10		5719.500	27.56	38.38	65.94	110.66	-44.72	peak	
11		5775.000	60.48	38.41	98.89	122.20	-23.31	peak	No Limit
12	X	5775.000	50.84	38.41	89.25	54.00	35.25	AVG	No Limit
13		5848.500	26.45	38.47	64.92	122.20	-57.28	peak	
14		5859.000	25.74	38.47	64.21	109.68	-45.47	peak	
15		5890.500	27.88	38.50	66.38	93.73	-27.35	peak	
16		5970.000	28.48	38.56	67.04	68.20	-1.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

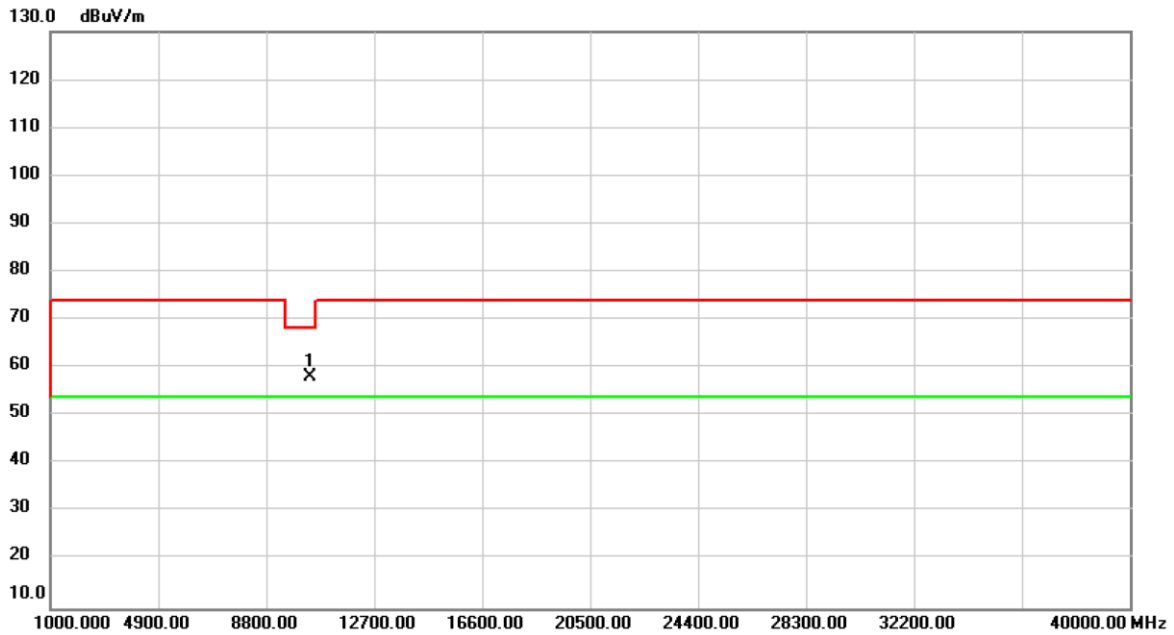


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.00	55.24	2.83	58.07	68.20	-10.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

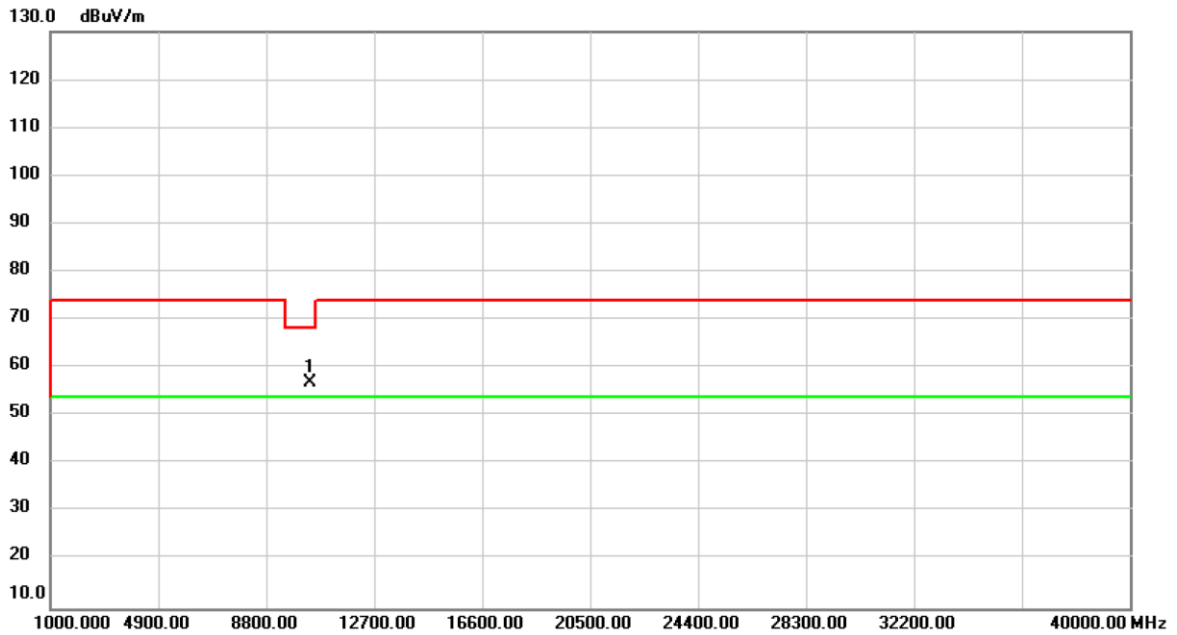


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.00	54.11	2.83	56.94	68.20	-11.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

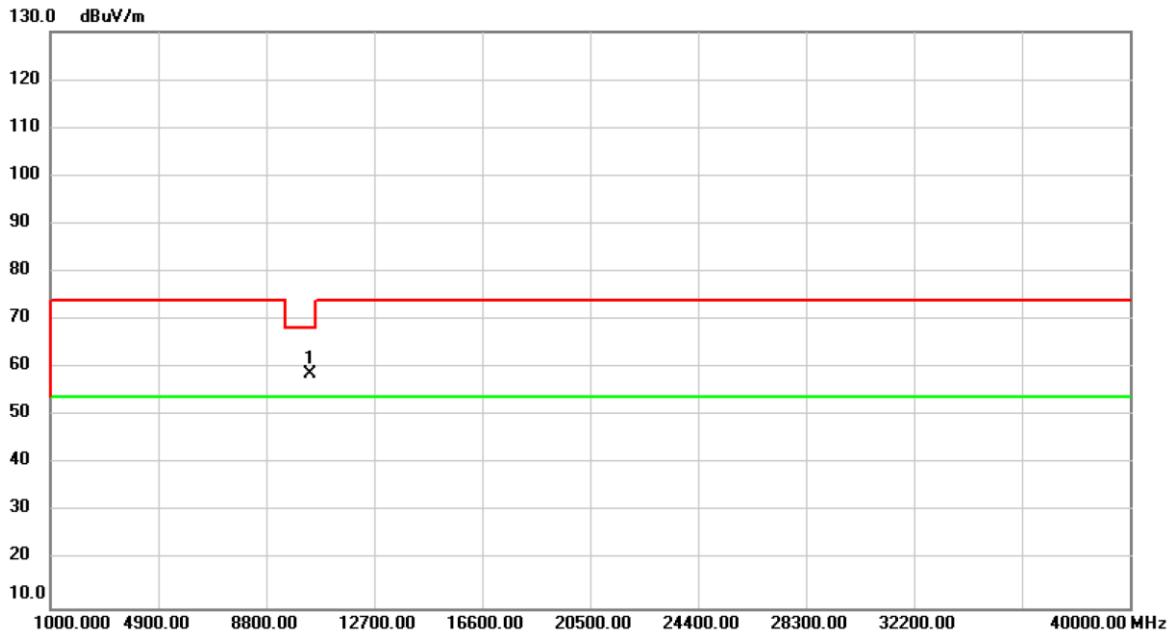


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10400.00	55.74	2.89	58.63	68.20	-9.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

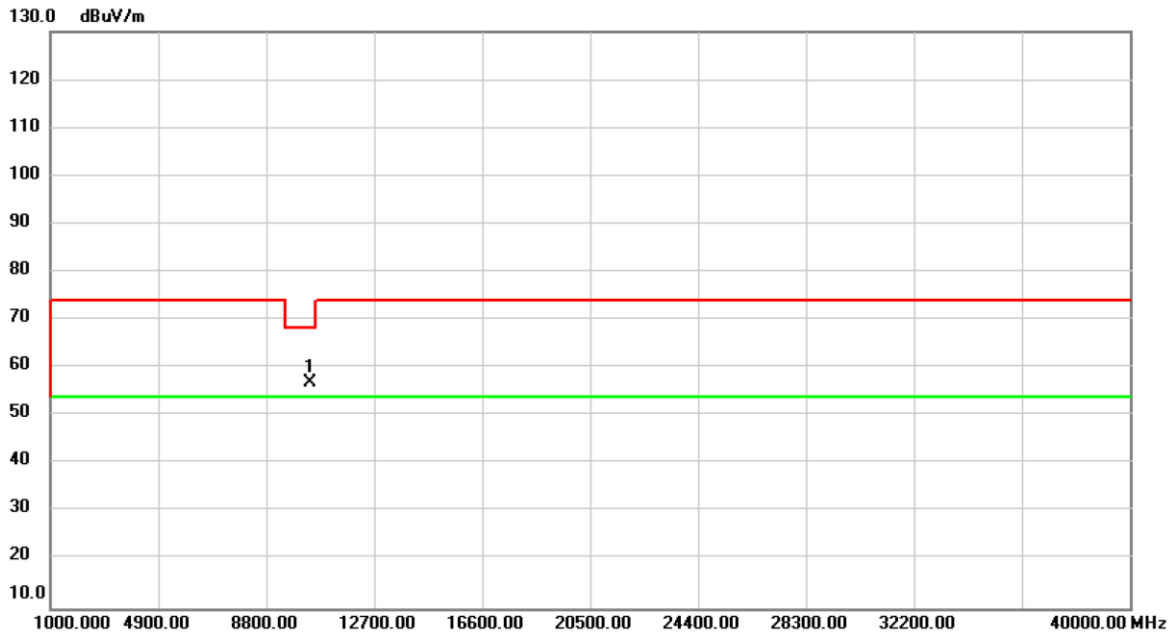


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	54.10	2.89	56.99	68.20	-11.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

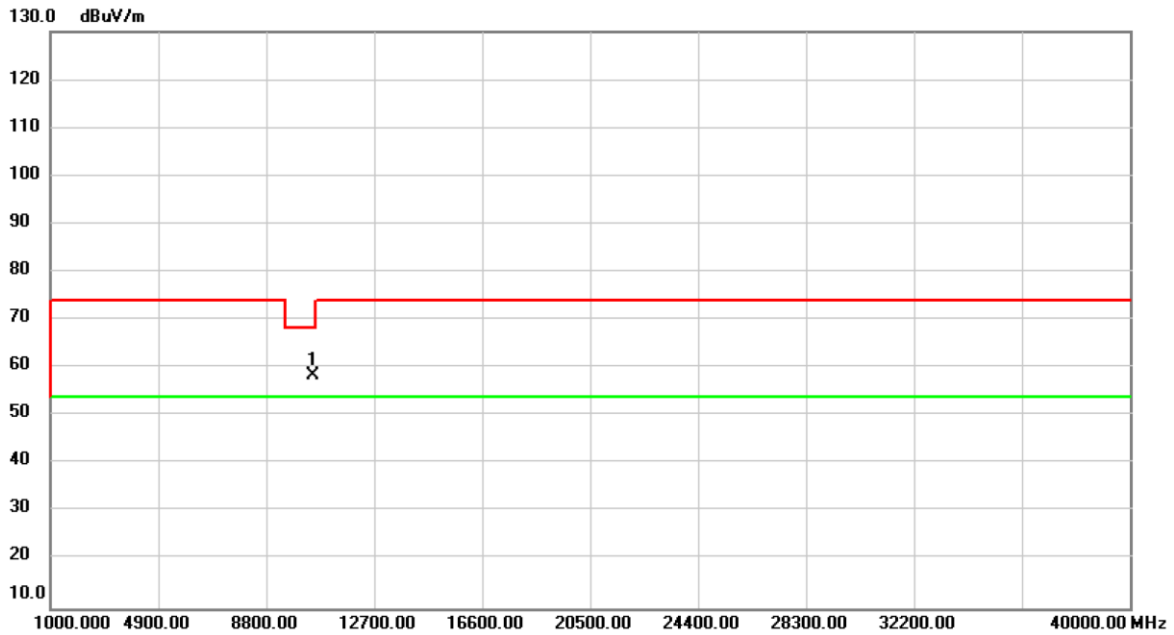


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.00	55.53	3.00	58.53	68.20	-9.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

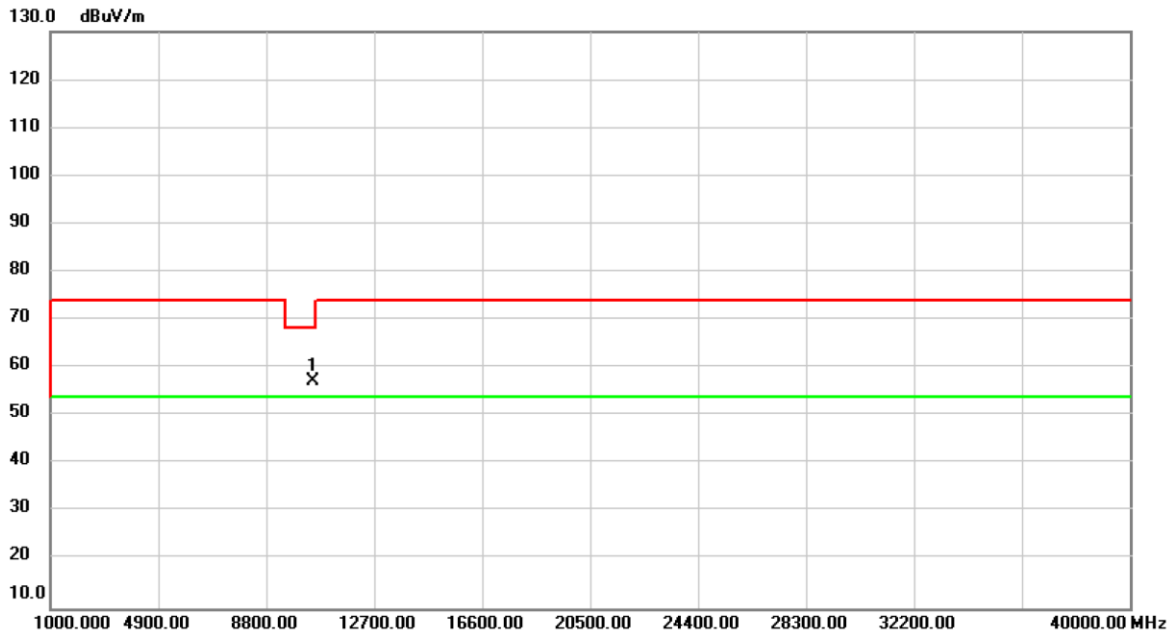


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.00	54.16	3.00	57.16	68.20	-11.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

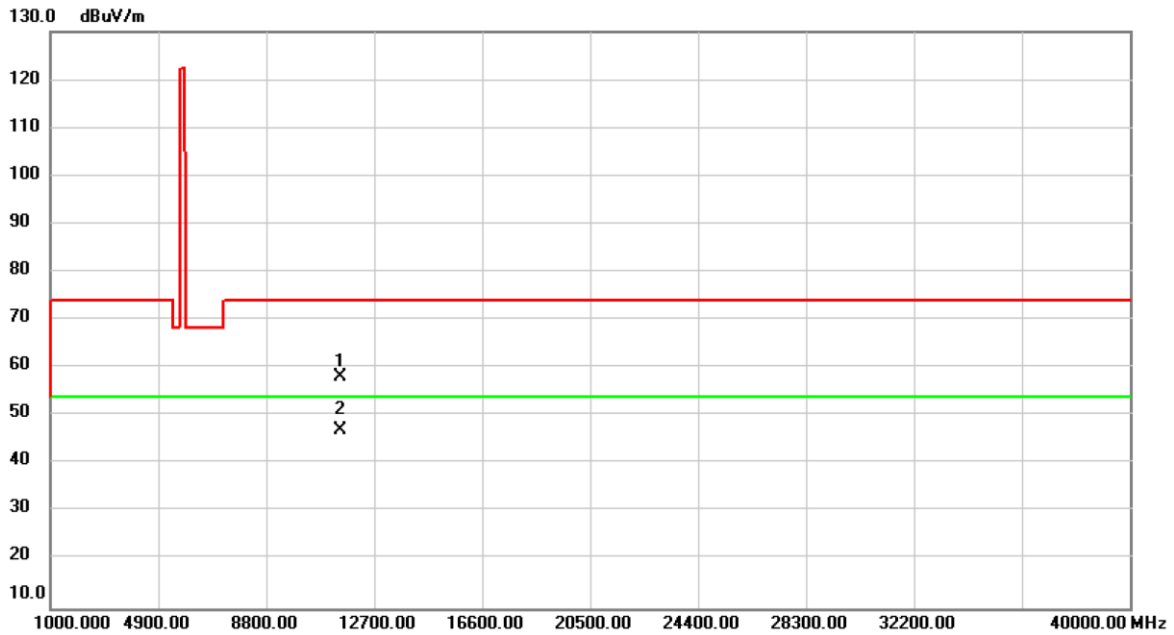


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.31	3.89	58.20	74.00	-15.80	peak	
2	*	11490.00	43.22	3.89	47.11	54.00	-6.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

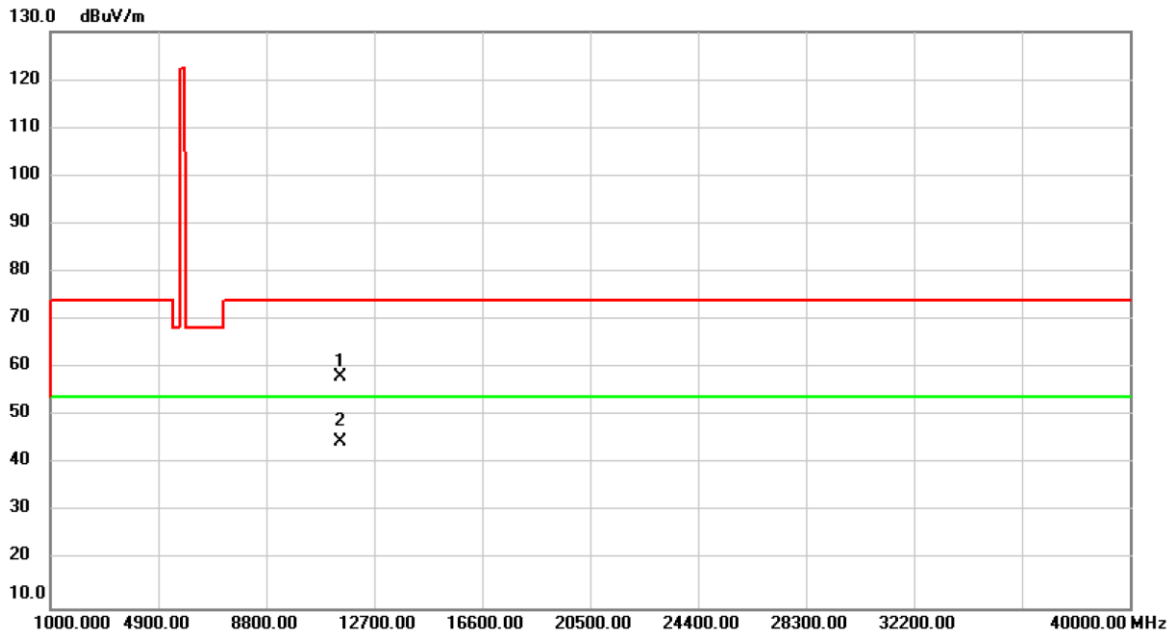


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.16	3.89	58.05	74.00	-15.95	peak	
2	*	11490.00	40.91	3.89	44.80	54.00	-9.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

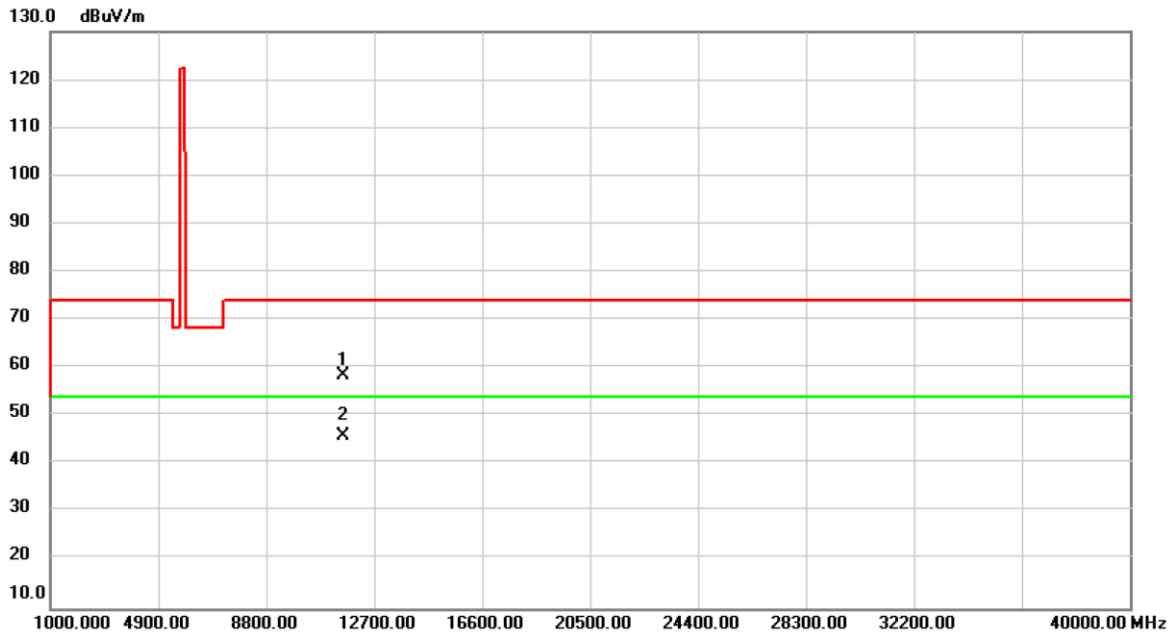


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.78	3.57	58.35	74.00	-15.65	peak	
2	*	11570.00	42.40	3.57	45.97	54.00	-8.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

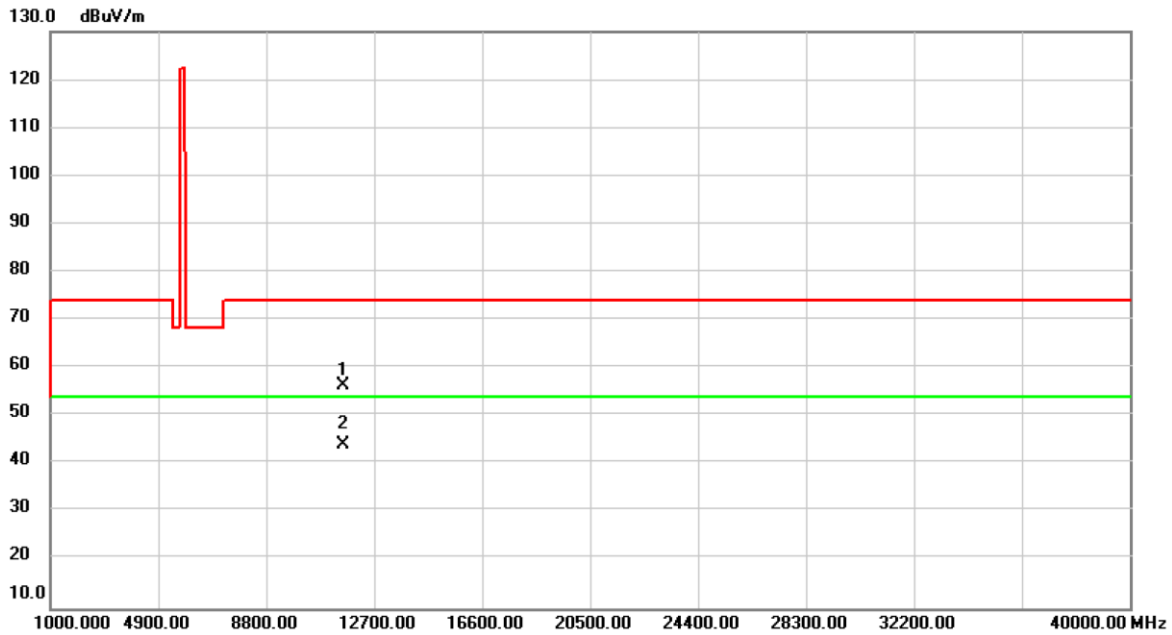


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	52.92	3.57	56.49	74.00	-17.51	peak	
2	*	11570.00	40.38	3.57	43.95	54.00	-10.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

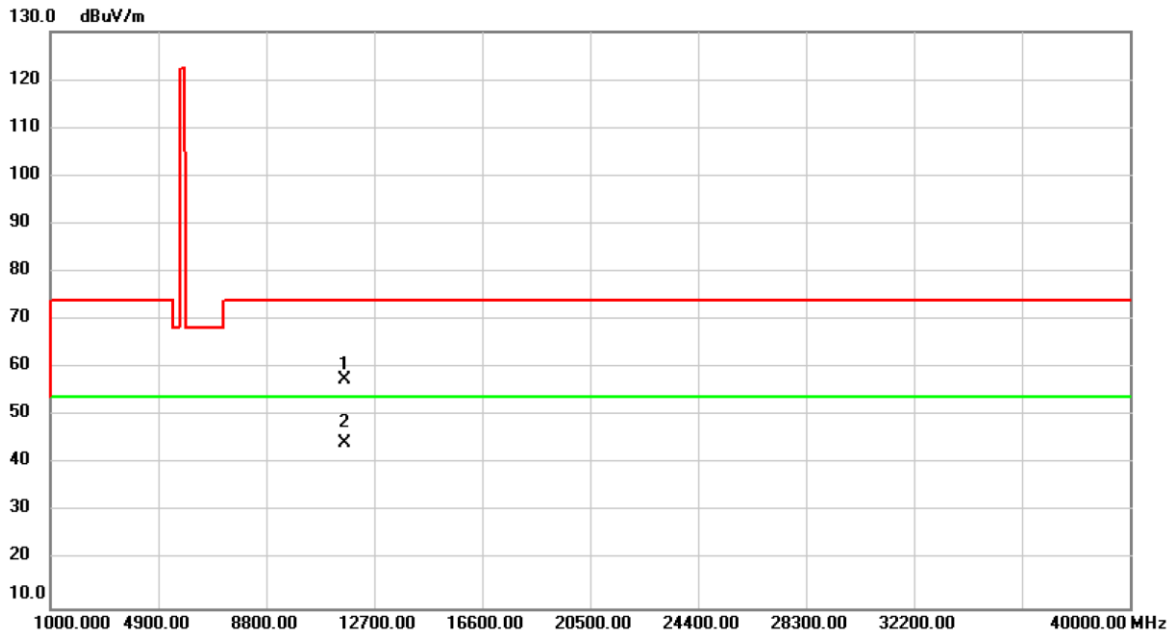


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	54.40	3.18	57.58	74.00	-16.42	peak	
2	*	11650.00	41.24	3.18	44.42	54.00	-9.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

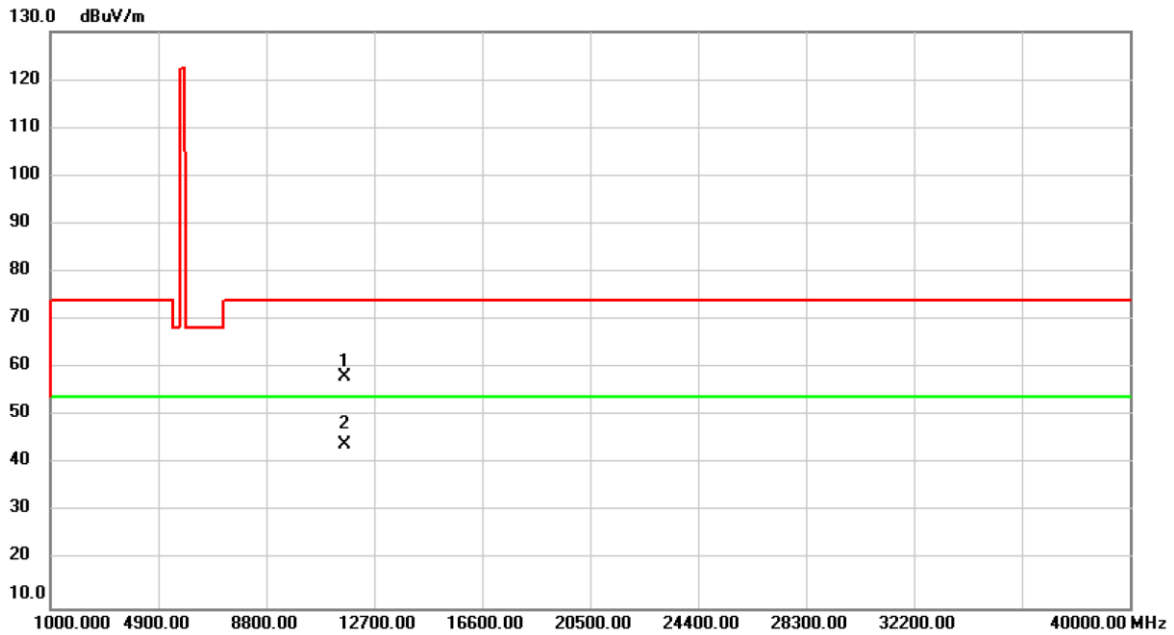


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	54.88	3.18	58.06	74.00	-15.94	peak	
2	*	11650.00	40.85	3.18	44.03	54.00	-9.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

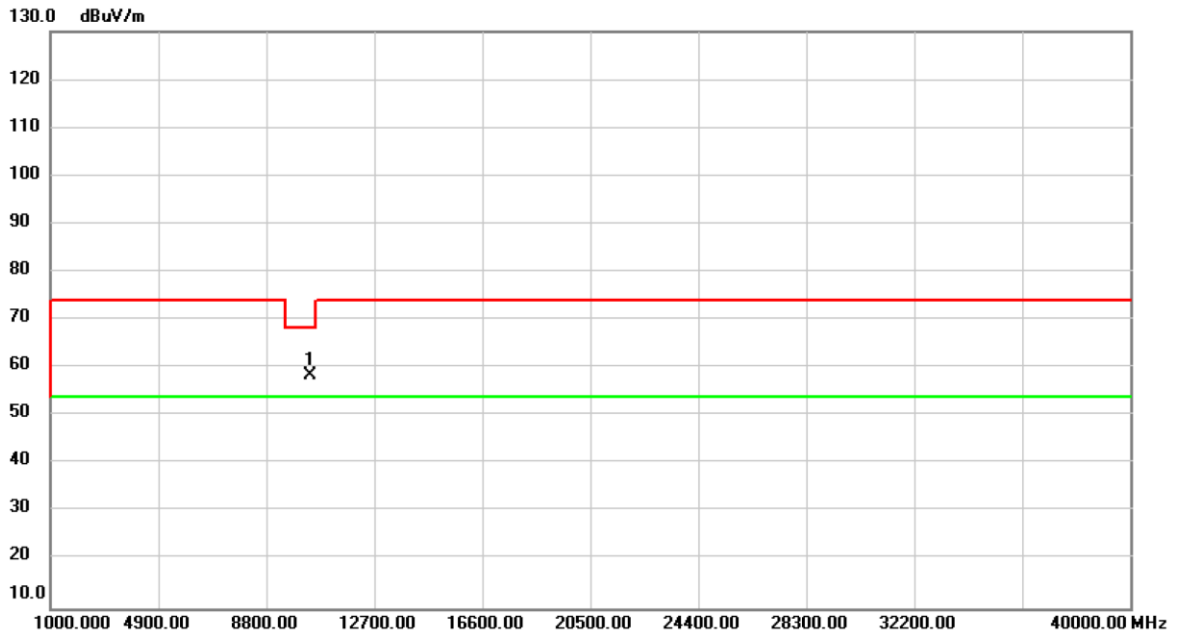


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	55.55	2.83	58.38	68.20	-9.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

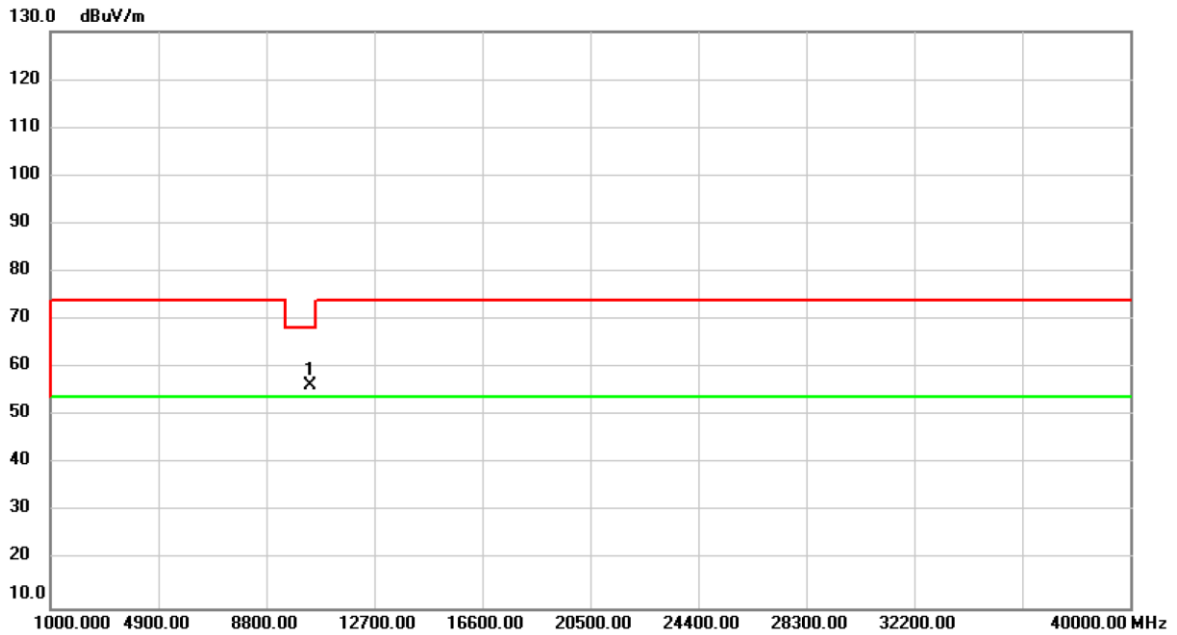


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	53.59	2.83	56.42	68.20	-11.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

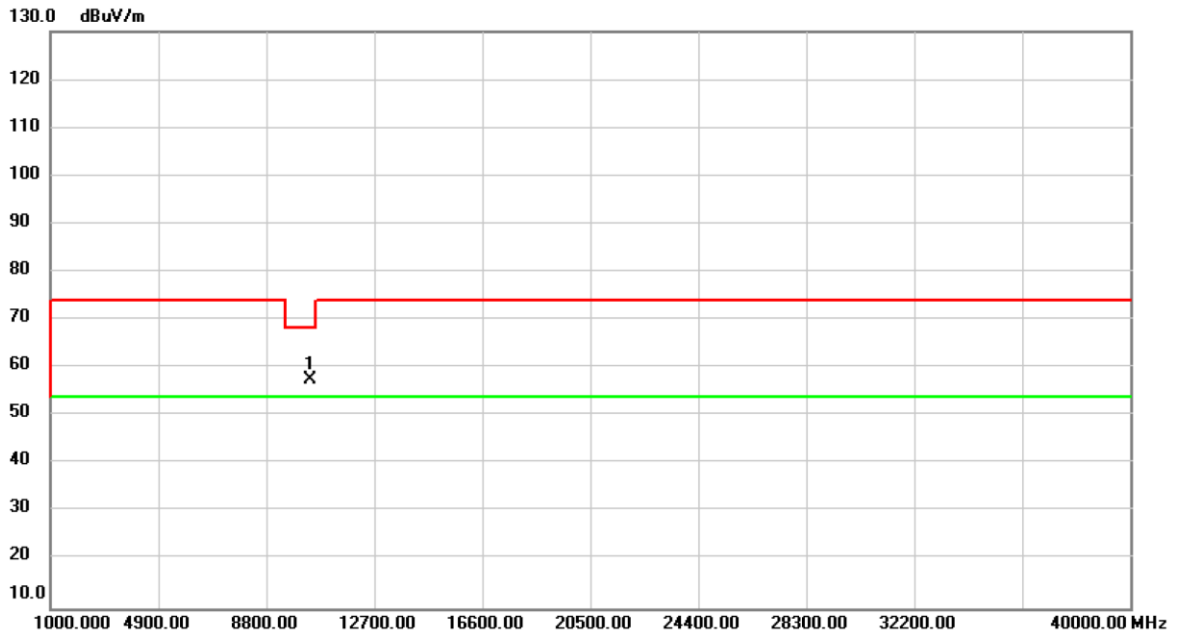

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10400.00	54.75	2.89	57.64	68.20	-10.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.