


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	1.51	0.74	2.25	10.99
CH122	5610	3.18	0.74	3.92	10.99

CH106

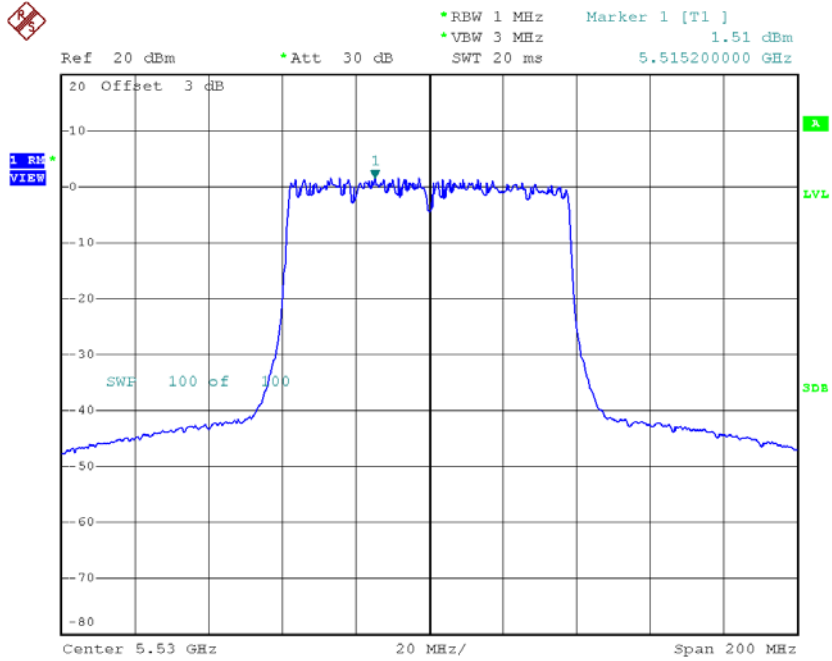

Date: 31.MAR.2018 18:53:45

CH122

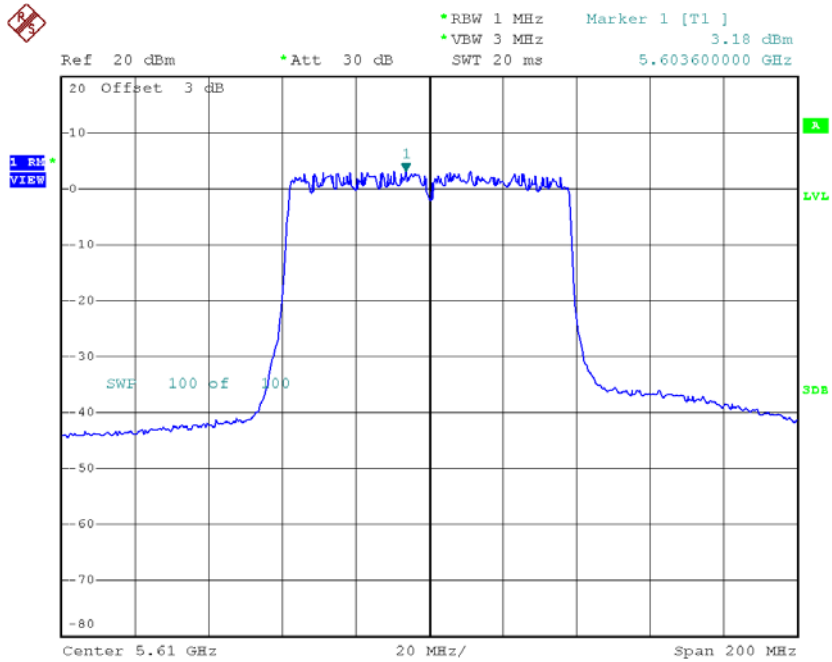

Date: 31.MAR.2018 18:54:47

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	4.85	10.99
CH122	5610	6.59	10.99

APPENDIX H - FREQUENCY STABILITY

Test Mode:	UNII-2A
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5259.9648
120	5259.9636
108	5259.9632
Max. Deviation (MHz)	0.0368
Max. Deviation (ppm)	6.9962

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5260.0000
-5	5259.9628
5	5259.9628
15	5259.9624
25	5259.9624
35	5259.9624
45	5259.9620
50	5259.9620
Max. Deviation (MHz)	0.0380
Max. Deviation (ppm)	7.2243

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5499.9628
120	5499.9624
108	5499.9624
Max. Deviation (MHz)	0.0376
Max. Deviation (ppm)	6.8364

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5500.0000
-5	5499.9620
5	5499.9616
15	5499.9612
25	5499.9612
35	5499.9612
45	5499.9608
50	5499.9608
Max. Deviation (MHz)	0.0392
Max. Deviation (ppm)	7.1273