



FCC TEST REPORT

REPORT NO.: RF140515E01

MODEL NO.: DCS-800L, DCS-800LA1, DCS-700L,
DCS-700LA1

FCC ID: KA2CS800LA1

RECEIVED: May 15, 2014

TESTED: May 19 to 21, 2014

ISSUED: June 24, 2014

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei
City 114, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES.....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL.....	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	17
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	18
4.1.6 EUT OPERATING CONDITIONS	19
4.1.7 TEST RESULTS (MODE 1).....	20
4.1.8 TEST RESULTS (MODE 2).....	22
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	24
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	24
4.2.2 TEST INSTRUMENTS	25
4.2.3 TEST PROCEDURES	26
4.2.4 DEVIATION FROM TEST STANDARD	26
4.2.5 TEST SETUP	27
4.2.6 EUT OPERATING CONDITIONS	27
4.2.7 TEST RESULTS	28
4.3 6dB BANDWIDTH MEASUREMENT	38
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	38
4.3.2 TEST INSTRUMENTS	38
4.3.3 TEST PROCEDURE	38
4.3.4 DEVIATION FROM TEST STANDARD	38
4.3.5 TEST SETUP	38
4.3.6 EUT OPERATING CONDITIONS	38
4.3.7 TEST RESULTS	39
4.4 CONDUCTED OUTPUT POWER MEASUREMENT	41
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	41
4.4.2 INSTRUMENTS.....	41
4.4.3 TEST PROCEDURES	41
4.4.4 DEVIATION FROM TEST STANDARD	41
4.4.5 TEST SETUP	41
4.4.6 EUT OPERATING CONDITIONS	41
4.4.7 TEST RESULTS	42
4.5 POWER SPECTRAL DENSITY MEASUREMENT.....	44
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.2 TEST INSTRUMENTS	44
4.5.3 TEST PROCEDURE	44



A D T

4.5.4	DEVIATION FROM TEST STANDARD	44
4.5.5	TEST SETUP	44
4.5.6	EUT OPERATING CONDITION	44
4.5.7	TEST RESULTS	45
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	47
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	47
4.6.2	TEST INSTRUMENTS	47
4.6.3	TEST PROCEDURE	47
4.6.4	DEVIATION FROM TEST STANDARD	48
4.6.5	TEST SETUP	48
4.6.6	EUT OPERATING CONDITION	48
4.6.7	TEST RESULTS	48
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	55
6.	INFORMATION ON THE TESTING LABORATORIES	56
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	57



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140515E01	Original release	June 24, 2014

1. CERTIFICATION

PRODUCT: Wi-Fi Baby Camera Junior, Wi-Fi Baby Camera Jr.
BRAND NAME: D-Link
MODEL NO.: DCS-800L, DCS-800LA1, DCS-700L, DCS-700LA1
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: D-Link Corporation
TESTED: May 19 to 21, 2014
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: DCS-800L) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** June 24, 2014
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** June 24, 2014
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.06dB at 25.34578MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 4824.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wi-Fi Baby Camera Junior, Wi-Fi Baby Camera Jr.
MODEL NO.	DCS-800L, DCS-800LA1, DCS-700L, DCS-700LA1
POWER SUPPLY	DC 5V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 72.2Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	802.11b: 221.309mW 802.11g: 403.645mW 802.11n (HT20): 395.367mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

NOTE:

1. The EUT has two product names and four model names, which are identical to each other in all aspects except for the following table:

Brand	Product Name	Model No.	Difference
D-Link	Wi-Fi Baby Camera Junior	DCS-800L	1. With different color of base. 2. With difference package for marketing purpose.
		DCS-800LA1	
	Wi-Fi Baby Camera Jr.	DCS-700L	
		DCS-700LA1	

From the above models, model: DCS-800L was selected as representative model for the test and its data was recorded in this report.

2. The antenna provided to the EUT, please refer to the following table:

Brand	Model	Gain (dBi)	Antenna Type	Connector Type	Frequency range (MHz to MHz)	Cable Loss (dB)	Cable Lenth (mm)
HL	290-20130	3.86	PCB	NA	2400-2500	NA	50

3. The EUT must be supplied with a power adapter as following table:

No	Brand	Model No.	Spec.	Plug
1	APD	WA-08B05R	Input: 100-240V, 0.3A, 50-60Hz Output: 5V, 1.5A DC output cable (Unshielded, 3m)	Universal
2	AMIGO	AMS1-0501200FU	Input: 100-240V, 0.2A, 50-60Hz Output: 5V, 1.2A DC output cable (Unshielded, 3m)	US

Note:

1. For radiated emissions test, the EUT was pre-tested with above adapters, the worst case was found in adapter 1. Therefore only the test data of the adapter 1 was recorded in this report.

4. The EUT incorporates a SISO function.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX

5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.
6. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
MODE 1	√	√	√	√	√	With adapter 1
MODE 2	√	-	-	-	-	With adapter 2

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **wall-mount type**.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	27deg. C, 73%RH	120Vac, 60Hz	Scott Chen
RE<1G	23deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
RE≥1G	22deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Chilin Lee
OB	25deg. C, 60%RH	120Vac, 60Hz	Chilin Lee

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

558074 D01 DTS Meas Guidance v03r01

ANSI C63.10-2009


All test items have been performed and recorded as per the above standards.



A D T

3.4 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is 100 %, duty factor is not required.

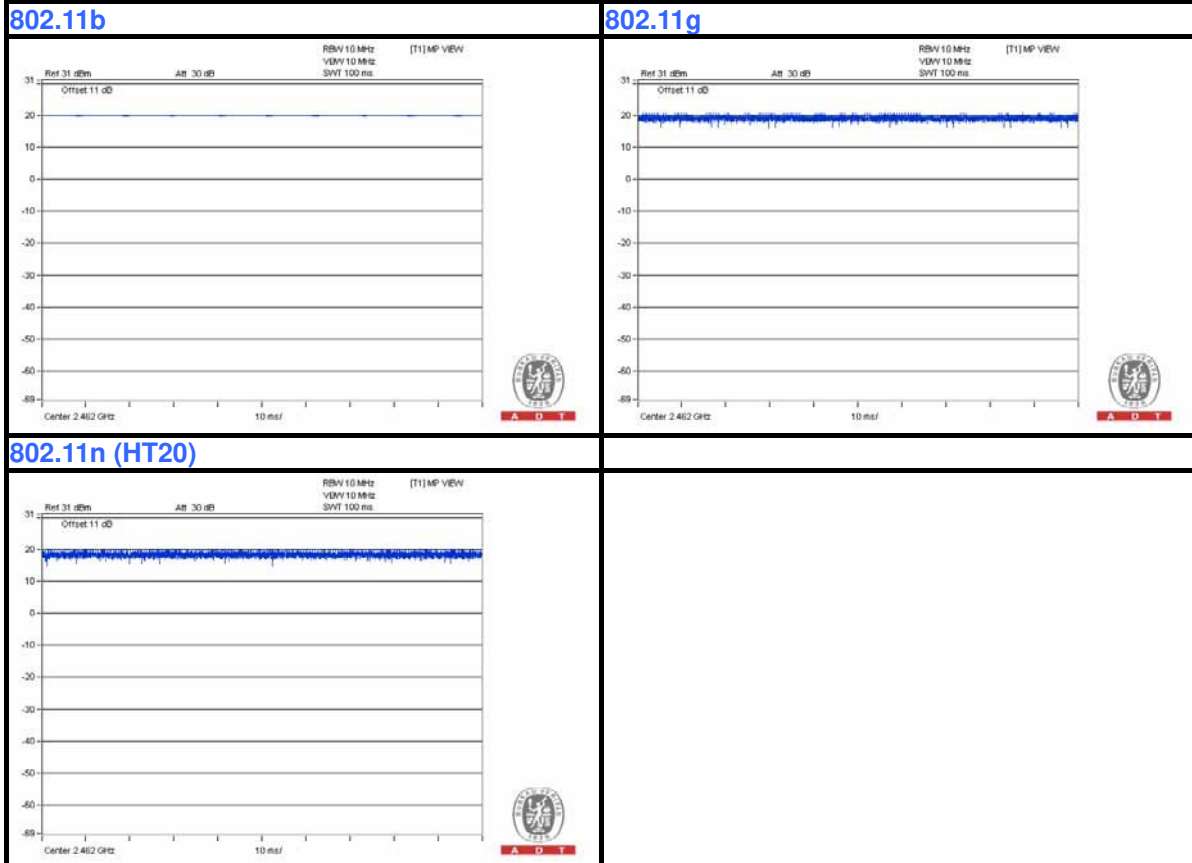

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

3.6 CONFIGURATION OF SYSTEM UNDER TEST

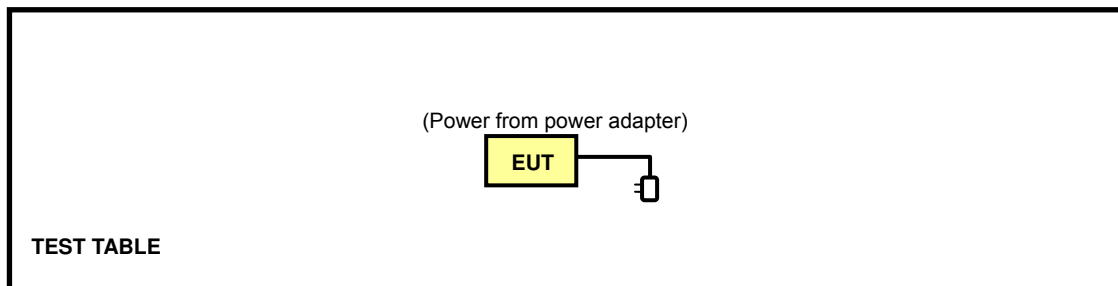



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	847124/029	Oct. 21, 2013	Oct. 20, 2014
Line-Impedance Stabilization Network (for EUT) ROHDE & SCHWARZ	NSLK-8127	5127-523	Oct. 02, 2013	Oct. 01, 2014
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COACAB-001	May 27, 2013	May 26, 2014
50 ohms Terminator	50	3	Oct. 17, 2013	Oct. 16, 2014
50 ohms Terminator	N/A	EMC-04	Oct. 17, 2013	Oct. 16, 2014
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: May 21, 2014

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

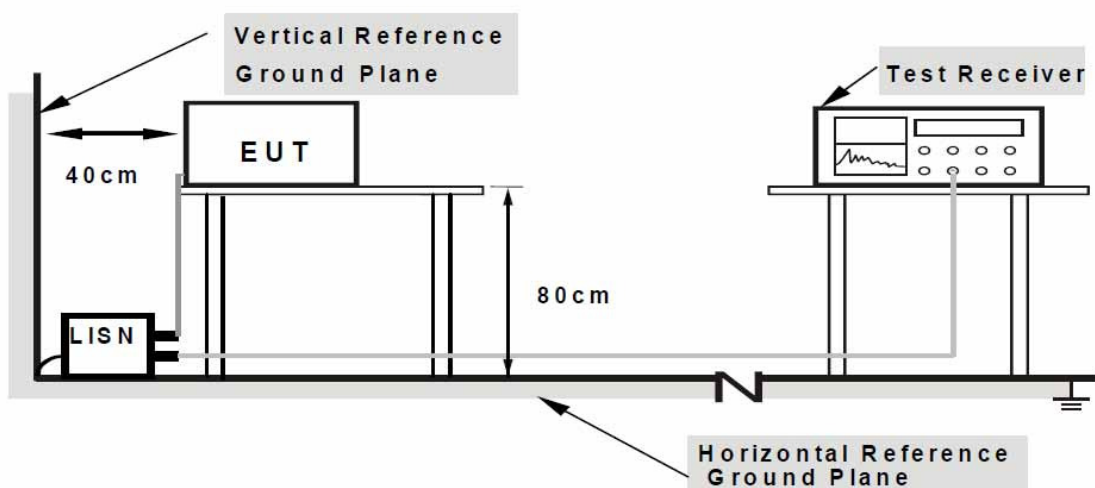

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Controlling software (RT5x7xQA.exe) has been activated to set the EUT under transmission/receiving condition continuously.


4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.07	48.47	38.69	48.54	38.76	65.18	55.18	-16.63	-16.41
2	0.19687	0.08	47.05	37.63	47.13	37.71	63.74	53.74	-16.61	-16.03
3	0.33750	0.12	45.06	38.84	45.18	38.96	59.26	49.26	-14.08	-10.30
4	0.61875	0.15	39.60	28.02	39.75	28.17	56.00	46.00	-16.25	-17.83
5	4.60938	0.48	36.97	30.75	37.45	31.23	56.00	46.00	-18.55	-14.77
6	13.05756	0.86	41.86	32.70	42.72	33.56	60.00	50.00	-17.28	-16.44
7	20.73438	1.25	39.56	32.84	40.81	34.09	60.00	50.00	-19.19	-15.91
8	26.11328	1.49	48.04	39.43	49.53	40.92	60.00	50.00	-10.47	-9.08
9	27.64972	1.55	42.51	35.03	44.06	36.58	60.00	50.00	-15.94	-13.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

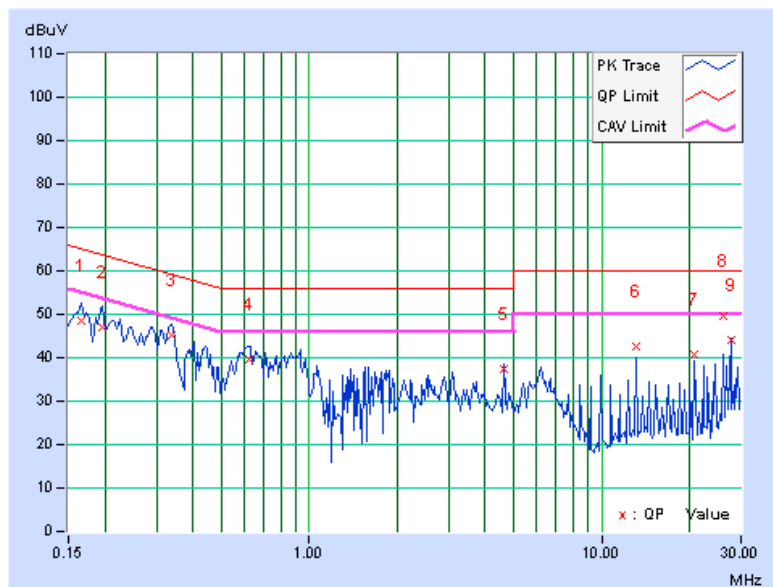


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.07	44.29	31.39	44.36	31.46	64.43	54.43	-20.07	-22.97
2	0.33359	0.12	50.57	46.10	50.69	46.22	59.36	49.36	-8.67	-3.14
3	0.43378	0.14	42.02	39.60	42.16	39.74	57.18	47.18	-15.02	-7.44
4	0.59141	0.15	43.04	33.16	43.19	33.31	56.00	46.00	-12.81	-12.69
5	0.84531	0.17	43.70	32.48	43.87	32.65	56.00	46.00	-12.13	-13.35
6	1.64844	0.21	41.08	33.30	41.29	33.51	56.00	46.00	-14.71	-12.49
7	26.11212	1.39	39.68	32.53	41.07	33.92	60.00	50.00	-18.93	-16.08
8	28.41444	1.48	43.63	33.65	45.11	35.13	60.00	50.00	-14.89	-14.87

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

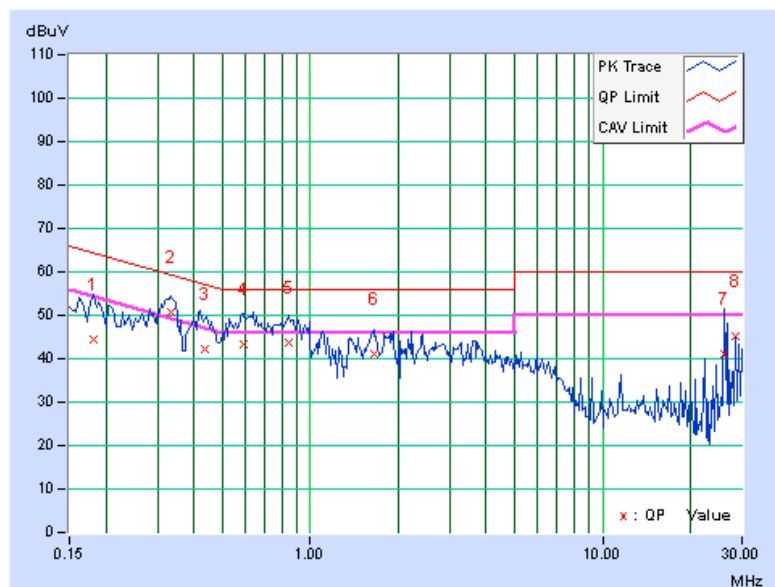


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16562	0.07	40.27	38.43	40.34	38.50	65.18
2	0.76981	0.16	42.67	37.93	42.83	38.09	56.00	46.00	-13.17	-7.91
3	3.07231	0.36	43.73	38.93	44.09	39.29	56.00	46.00	-11.91	-6.71
4	4.60938	0.48	44.17	38.23	44.65	38.71	56.00	46.00	-11.35	-7.29
5	11.52041	0.78	45.94	38.47	46.72	39.25	60.00	50.00	-13.28	-10.75
6	21.50653	1.29	46.39	37.25	47.68	38.54	60.00	50.00	-12.32	-11.46
7	24.57791	1.42	52.86	40.40	54.28	41.82	60.00	50.00	-5.72	-8.18
8	25.34578	1.45	55.49	44.50	56.94	45.95	60.00	50.00	-3.06	-4.05
9	28.41797	1.58	46.96	36.51	48.54	38.09	60.00	50.00	-11.46	-11.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

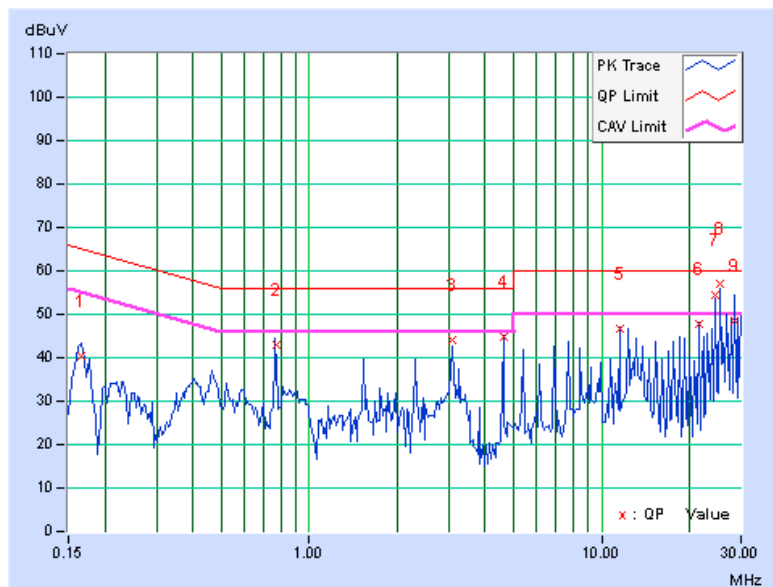


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.07	40.27	38.23	40.34	38.30	65.18	55.18	-24.84	-16.88
2	0.76856	0.16	37.79	33.22	37.95	33.38	56.00	46.00	-18.05	-12.62
3	3.07331	0.29	39.05	34.04	39.34	34.33	56.00	46.00	-16.66	-11.67
4	13.05594	0.82	38.03	32.44	38.85	33.26	60.00	50.00	-21.15	-16.74
5	24.57637	1.33	51.88	36.73	53.21	38.06	60.00	50.00	-6.79	-11.94
6	25.34609	1.36	54.97	40.87	56.33	42.23	60.00	50.00	-3.67	-7.77
7	26.11122	1.39	55.36	37.32	56.75	38.71	60.00	50.00	-3.25	-11.29
8	29.95197	1.55	43.54	29.36	45.09	30.91	60.00	50.00	-14.91	-19.09

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

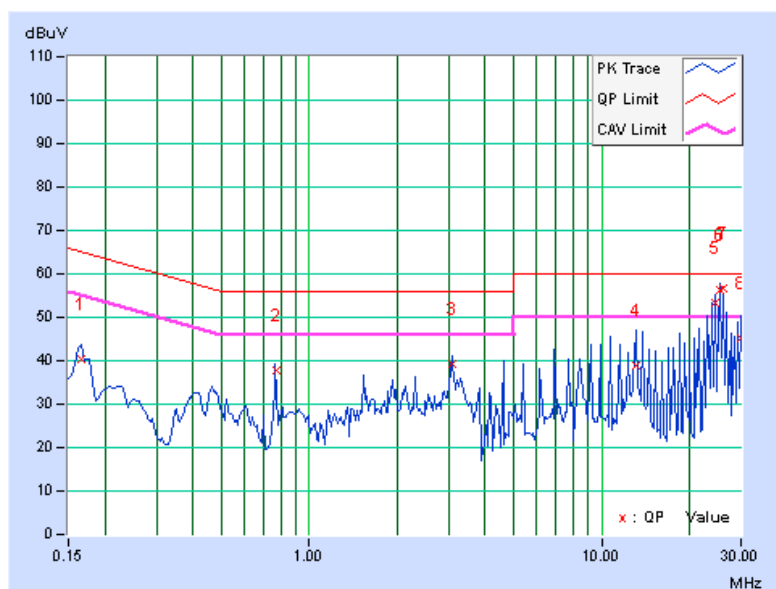



A D T

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 21, 2014	Jan. 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISi	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: May 19, 2014

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

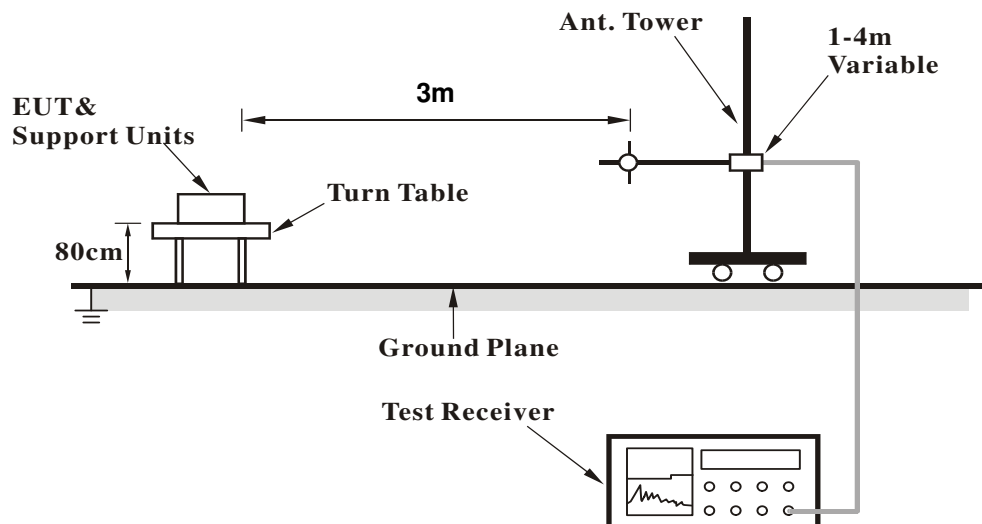

<Frequency Range above 1GHz>

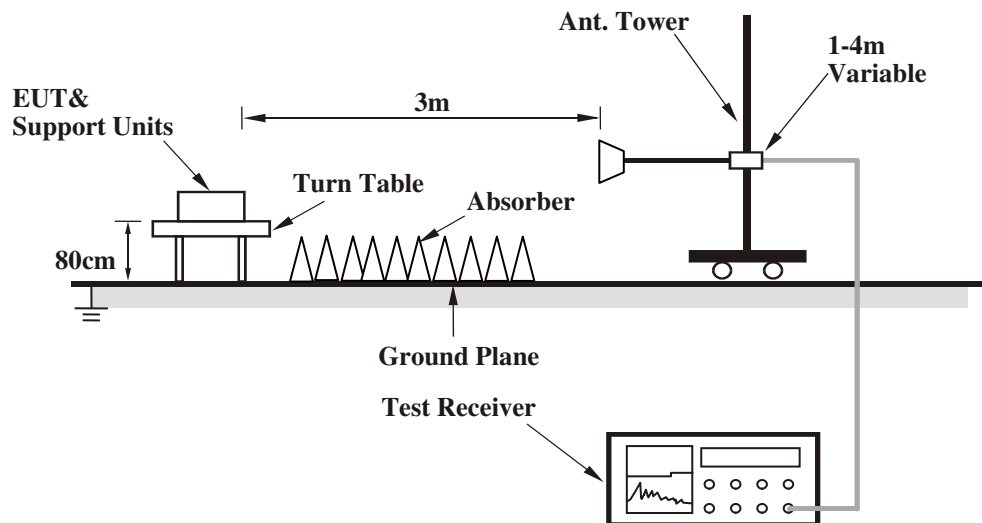

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	88.20	24.0 QP	43.5	-19.5	1.00 H	48	43.07	-19.08
2	720.01	35.1 QP	46.0	-10.9	1.00 H	307	38.35	-3.26
3	756.00	32.7 QP	46.0	-13.3	1.00 H	316	34.51	-1.83
4	780.00	38.6 QP	46.0	-7.4	1.00 H	314	40.03	-1.47
5	804.01	34.8 QP	46.0	-11.2	1.00 H	307	36.15	-1.36
6	840.00	39.2 QP	46.0	-6.8	1.00 H	360	40.12	-0.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.96	35.0 QP	40.0	-5.0	1.00 V	14	48.70	-13.72
2	84.85	32.7 QP	40.0	-7.3	1.00 V	2	51.66	-18.98
3	120.02	32.4 QP	43.5	-11.1	1.00 V	329	47.68	-15.24
4	359.99	33.6 QP	46.0	-12.5	1.00 V	344	44.35	-10.80
5	600.02	38.3 QP	46.0	-7.7	1.00 V	75	43.22	-4.89
6	840.00	35.3 QP	46.0	-10.8	1.00 V	68	36.15	-0.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.00	60.2 PK	74.0	-13.8	1.59 H	185	61.92	-1.72
2	2385.00	53.1 AV	54.0	-0.9	1.59 H	185	54.82	-1.72
3	*2412.00	109.7 PK			1.59 H	185	111.30	-1.60
4	*2412.00	107.3 AV			1.59 H	185	108.90	-1.60
5	4824.00	55.4 PK	74.0	-18.6	1.00 H	180	48.20	7.20
6	4824.00	53.8 AV	54.0	-0.2	1.00 H	180	46.60	7.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.00	56.2 PK	74.0	-17.8	1.51 V	230	57.92	-1.72
2	2385.00	49.1 AV	54.0	-4.9	1.51 V	230	50.82	-1.72
3	*2412.00	103.7 PK			1.51 V	230	105.30	-1.60
4	*2412.00	101.3 AV			1.51 V	230	102.90	-1.60
5	4824.00	50.5 PK	74.0	-23.5	1.23 V	90	43.30	7.20
6	4824.00	45.2 AV	54.0	-8.8	1.23 V	90	38.00	7.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2381.00	51.4 PK	74.0	-22.6	1.59 H	192	53.13	-1.73
2	2381.00	45.8 AV	54.0	-8.2	1.59 H	192	47.53	-1.73
3	*2437.00	109.5 PK			1.59 H	192	110.99	-1.49
4	*2437.00	107.0 AV			1.59 H	192	108.49	-1.49
5	2492.00	49.8 PK	74.0	-24.2	1.59 H	192	51.05	-1.25
6	2492.00	43.5 AV	54.0	-10.5	1.59 H	192	44.75	-1.25
7	4874.00	50.2 PK	74.0	-23.8	1.00 H	41	42.87	7.33
8	4874.00	44.2 AV	54.0	-9.8	1.00 H	41	36.87	7.33
9	7311.00	59.3 PK	74.0	-14.7	1.17 H	245	44.34	14.96
10	7311.00	53.3 AV	54.0	-0.7	1.17 H	245	38.34	14.96

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2381.00	48.9 PK	74.0	-25.1	1.47 V	233	50.63	-1.73
2	2381.00	42.5 AV	54.0	-11.5	1.47 V	233	44.23	-1.73
3	*2437.00	103.4 PK			1.50 V	229	104.89	-1.49
4	*2437.00	101.2 AV			1.50 V	229	102.69	-1.49
5	2492.00	48.8 PK	74.0	-25.2	1.50 V	229	50.05	-1.25
6	2492.00	42.2 AV	54.0	-11.8	1.50 V	229	43.45	-1.25
7	4874.00	51.3 PK	74.0	-22.7	1.27 V	98	43.97	7.33
8	4874.00	45.4 AV	54.0	-8.6	1.27 V	98	38.07	7.33
9	7311.00	57.1 PK	74.0	-16.9	1.45 V	171	42.14	14.96
10	7311.00	51.0 AV	54.0	-3.0	1.45 V	171	36.04	14.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.5 PK			1.54 H	195	108.88	-1.38
2	*2462.00	105.0 AV			1.54 H	195	106.38	-1.38
3	2483.50	60.3 PK	74.0	-13.7	1.54 H	195	61.58	-1.28
4	2483.50	53.5 AV	54.0	-0.5	1.54 H	195	54.78	-1.28
5	4924.00	53.6 PK	74.0	-20.4	1.12 H	181	46.13	7.47
6	4924.00	50.6 AV	54.0	-3.4	1.12 H	181	43.13	7.47
7	7386.00	56.1 PK	74.0	-17.9	1.17 H	244	41.21	14.89
8	7386.00	46.6 AV	54.0	-7.4	1.17 H	244	31.71	14.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.3 PK			1.51 V	231	102.68	-1.38
2	*2462.00	98.2 AV			1.51 V	231	99.58	-1.38
3	2483.50	54.4 PK	74.0	-19.6	1.51 V	231	55.68	-1.28
4	2483.50	46.5 AV	54.0	-7.5	1.51 V	231	47.78	-1.28
5	4924.00	58.2 PK	74.0	-15.8	1.10 V	105	50.73	7.47
6	4924.00	48.4 AV	54.0	-5.6	1.10 V	105	40.93	7.47
7	7386.00	57.3 PK	74.0	-16.7	1.16 V	196	42.41	14.89
8	7386.00	47.3 AV	54.0	-6.7	1.16 V	196	32.41	14.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	1.55 H	192	71.80	-1.70
2	2390.00	53.0 AV	54.0	-1.0	1.55 H	192	54.70	-1.70
3	*2412.00	108.3 PK			1.55 H	192	109.90	-1.60
4	*2412.00	100.1 AV			1.55 H	192	101.70	-1.60
5	4824.00	55.7 PK	74.0	-18.3	1.10 H	148	48.50	7.20
6	4824.00	47.0 AV	54.0	-7.0	1.10 H	148	39.80	7.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.51 V	232	62.30	-1.70
2	2390.00	45.6 AV	54.0	-8.4	1.51 V	232	47.30	-1.70
3	*2412.00	102.6 PK			1.51 V	232	104.20	-1.60
4	*2412.00	94.4 AV			1.51 V	232	96.00	-1.60
5	4824.00	55.4 PK	74.0	-18.6	1.54 V	197	48.20	7.20
6	4824.00	46.5 AV	54.0	-7.5	1.54 V	197	39.30	7.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.1 PK			1.52 H	195	114.59	-1.49
2	*2437.00	104.6 AV			1.52 H	195	106.09	-1.49
3	2489.20	62.7 PK	74.0	-11.3	1.52 H	195	63.96	-1.26
4	2489.20	53.6 AV	54.0	-0.4	1.52 H	195	54.86	-1.26
5	4874.00	56.1 PK	74.0	-17.9	1.16 H	172	48.77	7.33
6	4874.00	47.2 AV	54.0	-6.8	1.16 H	172	39.87	7.33
7	7311.00	54.8 PK	74.0	-19.2	1.52 H	5	39.84	14.96
8	7311.00	44.4 AV	54.0	-9.6	1.52 H	5	29.44	14.96

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.2 PK			1.51 V	230	108.69	-1.49
2	*2437.00	98.2 AV			1.51 V	230	99.69	-1.49
3	2489.20	60.1 PK	74.0	-13.9	1.51 V	230	61.36	-1.26
4	2489.20	45.4 AV	54.0	-8.6	1.51 V	230	46.66	-1.26
5	4874.00	55.1 PK	74.0	-18.9	1.62 V	201	47.77	7.33
6	4874.00	46.2 AV	54.0	-7.8	1.62 V	201	38.87	7.33
7	7311.00	52.2 PK	74.0	-21.8	1.00 V	80	37.24	14.96
8	7311.00	45.3 AV	54.0	-8.7	1.00 V	80	30.34	14.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.2 PK			1.53 H	196	108.58	-1.38
2	*2462.00	97.8 AV			1.53 H	196	99.18	-1.38
3	2483.50	70.9 PK	74.0	-3.1	1.53 H	196	72.18	-1.28
4	2483.50	53.7 AV	54.0	-0.3	1.53 H	196	54.98	-1.28
5	4924.00	55.2 PK	74.0	-18.8	1.16 H	153	47.73	7.47
6	4924.00	46.7 AV	54.0	-7.3	1.16 H	153	39.23	7.47
7	7386.00	56.1 PK	74.0	-17.9	1.52 H	0	41.21	14.89
8	7386.00	45.5 AV	54.0	-8.5	1.52 H	0	30.61	14.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.2 PK			1.50 V	229	102.58	-1.38
2	*2462.00	91.4 AV			1.50 V	229	92.78	-1.38
3	2483.50	60.1 PK	74.0	-13.9	1.50 V	229	61.38	-1.28
4	2483.50	45.3 AV	54.0	-8.7	1.50 V	229	46.58	-1.28
5	4924.00	55.3 PK	74.0	-18.7	1.60 V	186	47.83	7.47
6	4924.00	46.2 AV	54.0	-7.8	1.60 V	186	38.73	7.47
7	7386.00	51.8 PK	74.0	-22.2	1.00 V	83	36.91	14.89
8	7386.00	45.0 AV	54.0	-9.0	1.00 V	83	30.11	14.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.60 H	184	71.90	-1.70
2	2390.00	53.3 AV	54.0	-0.7	1.60 H	184	55.00	-1.70
3	*2412.00	107.6 PK			1.60 H	184	109.20	-1.60
4	*2412.00	98.8 AV			1.60 H	184	100.40	-1.60
5	4824.00	55.8 PK	74.0	-18.2	1.10 H	173	48.60	7.20
6	4824.00	47.7 AV	54.0	-6.3	1.10 H	173	40.50	7.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.50 V	221	62.10	-1.70
2	2390.00	45.4 AV	54.0	-8.6	1.50 V	221	47.10	-1.70
3	*2412.00	101.4 PK			1.50 V	221	103.00	-1.60
4	*2412.00	92.6 AV			1.50 V	221	94.20	-1.60
5	4824.00	55.2 PK	74.0	-18.8	1.56 V	173	48.00	7.20
6	4824.00	46.4 AV	54.0	-7.6	1.56 V	173	39.20	7.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.5 PK			1.53 H	194	112.99	-1.49
2	*2437.00	103.2 AV			1.53 H	194	104.69	-1.49
3	2489.00	62.6 PK	74.0	-11.4	1.53 H	194	63.86	-1.26
4	2489.00	53.7 AV	54.0	-0.3	1.53 H	194	54.96	-1.26
5	4874.00	56.7 PK	74.0	-17.3	1.05 H	170	49.37	7.33
6	4874.00	47.9 AV	54.0	-6.1	1.05 H	170	40.57	7.33
7	7311.00	55.5 PK	74.0	-18.5	1.52 H	12	40.54	14.96
8	7311.00	45.0 AV	54.0	-9.0	1.52 H	12	30.04	14.96

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.2 PK			1.48 V	222	106.69	-1.49
2	*2437.00	96.9 AV			1.48 V	222	98.39	-1.49
3	2489.00	59.2 PK	74.0	-14.8	1.48 V	222	60.46	-1.26
4	2489.00	45.0 AV	54.0	-9.0	1.48 V	222	46.26	-1.26
5	4874.00	55.4 PK	74.0	-18.6	1.55 V	185	48.07	7.33
6	4874.00	46.4 AV	54.0	-7.6	1.55 V	185	39.07	7.33
7	7311.00	51.9 PK	74.0	-22.1	1.00 V	76	36.94	14.96
8	7311.00	45.4 AV	54.0	-8.6	1.00 V	76	30.44	14.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.2 PK			1.53 H	193	107.58	-1.38
2	*2462.00	97.2 AV			1.53 H	193	98.58	-1.38
3	2483.50	72.3 PK	74.0	-1.7	1.53 H	193	73.58	-1.28
4	2483.50	53.6 AV	54.0	-0.4	1.53 H	193	54.88	-1.28
5	4924.00	56.0 PK	74.0	-18.0	1.17 H	166	48.53	7.47
6	4924.00	47.2 AV	54.0	-6.8	1.17 H	166	39.73	7.47
7	7386.00	55.3 PK	74.0	-18.7	1.41 H	0	40.41	14.89
8	7386.00	44.9 AV	54.0	-9.1	1.41 H	0	30.01	14.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.1 PK			1.53 V	213	101.48	-1.38
2	*2462.00	91.1 AV			1.53 V	213	92.48	-1.38
3	2483.50	60.1 PK	74.0	-13.9	1.53 V	213	61.38	-1.28
4	2483.50	45.3 AV	54.0	-8.7	1.53 V	213	46.58	-1.28
5	4924.00	54.8 PK	74.0	-19.2	1.60 V	193	47.33	7.47
6	4924.00	45.7 AV	54.0	-8.3	1.60 V	193	38.23	7.47
7	7386.00	52.8 PK	74.0	-21.2	1.01 V	93	37.91	14.89
8	7386.00	45.6 AV	54.0	-8.4	1.01 V	93	30.71	14.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 19, 2014


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

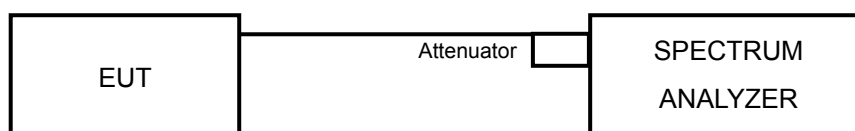

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.13	0.5	PASS
6	2437	12.11	0.5	PASS
11	2462	12.14	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.38	0.5	PASS
6	2437	16.35	0.5	PASS
11	2462	16.40	0.5	PASS

802.11n (HT20)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.13	0.5	PASS
6	2437	17.03	0.5	PASS
11	2462	17.33	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH6

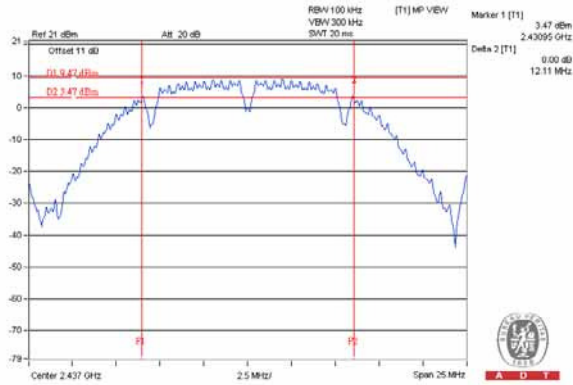

802.11g / CH6

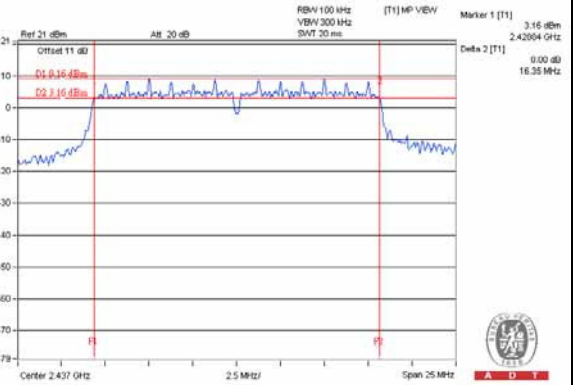

802.11n (HT20) / CH6

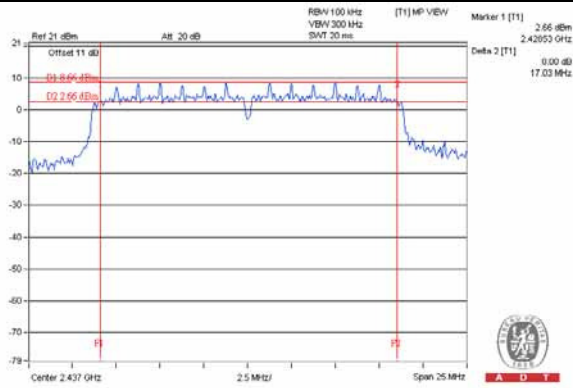



A D T

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power Sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 19, 2014


4.4.3 TEST PROCEDURES

The peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

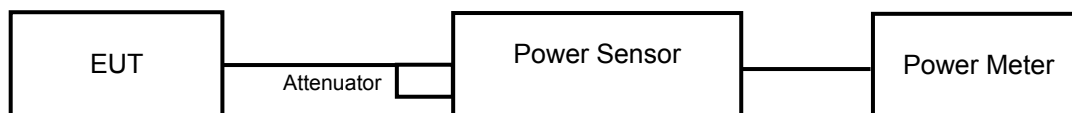

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

FOR PEAK POWER

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	206.538	23.15	30	PASS
6	2437	221.309	23.45	30	PASS
11	2462	157.398	21.97	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	257.632	24.11	30	PASS
6	2437	403.645	26.06	30	PASS
11	2462	207.014	23.16	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	207.491	23.17	30	PASS
6	2437	395.367	25.97	30	PASS
11	2462	188.365	22.75	30	PASS



A D T

FOR AVERAGE POWER

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	133.968	21.27
6	2437	145.211	21.62
11	2462	99.541	19.98

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	42.073	16.24
6	2437	126.183	21.01
11	2462	32.434	15.11

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	35.237	15.47
6	2437	116.145	20.65
11	2462	27.669	14.42

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 19, 2014


4.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

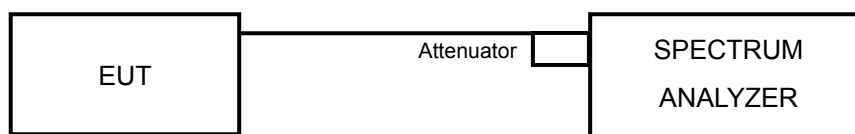

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-3.57	8	PASS
6	2437	-3.16	8	PASS
11	2462	-4.56	8	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-11.20	8	PASS
6	2437	-6.10	8	PASS
11	2462	-11.63	8	PASS

802.11n (HT20)


CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-12.85	8	PASS
6	2437	-7.17	8	PASS
11	2462	-12.39	8	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH6

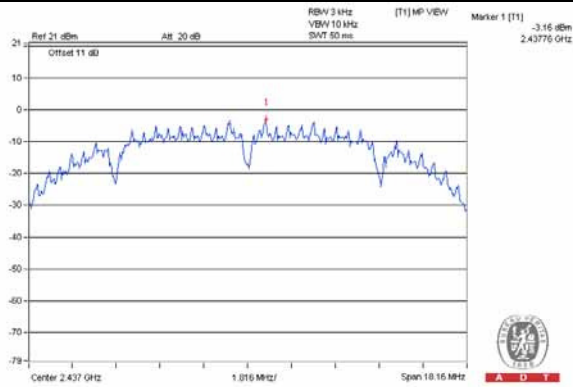

802.11g / CH6

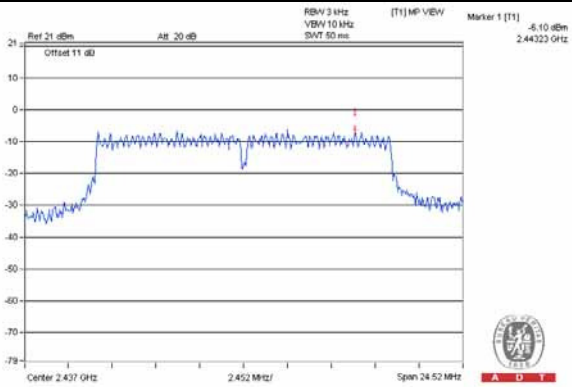

802.11n (HT20) / CH6

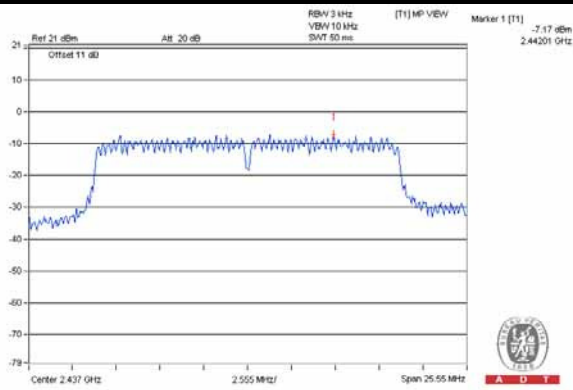



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 15, 2013	July 14, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 19, 2014

4.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

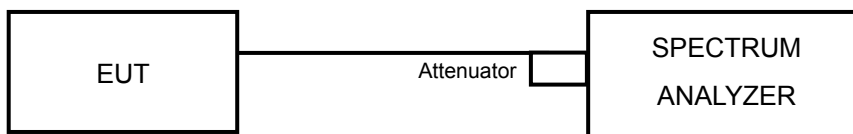

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b:


CH 1

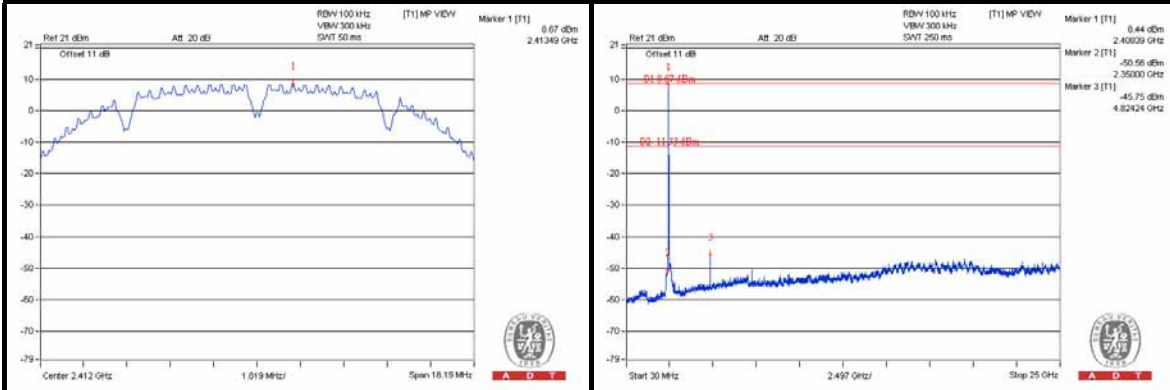

CH 6

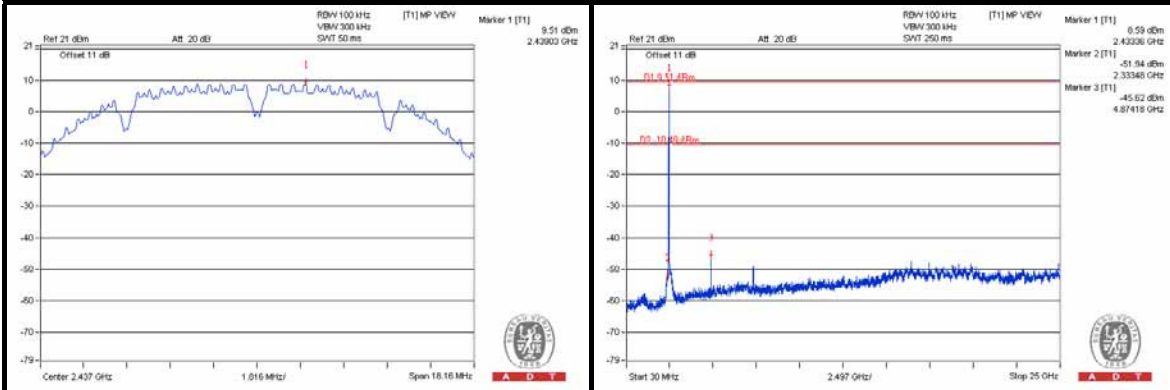


CH 11

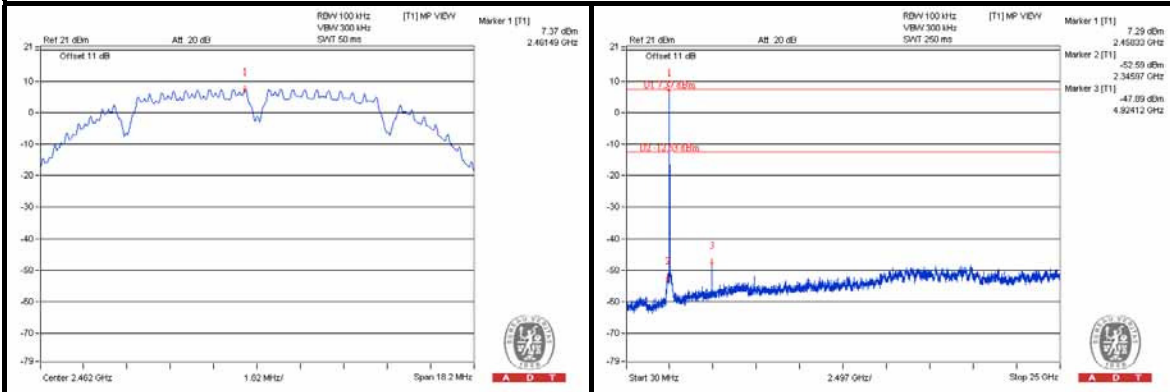




A D T

CH 1 Band edge

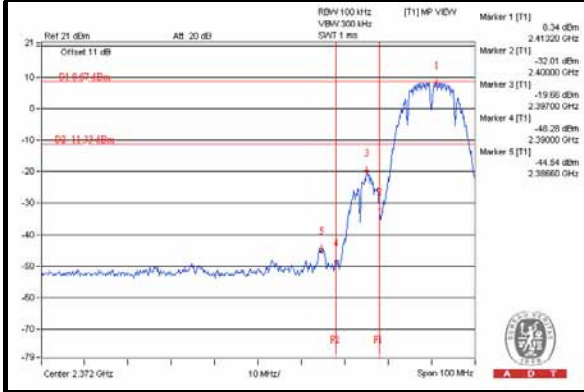

CH 11 Band edge


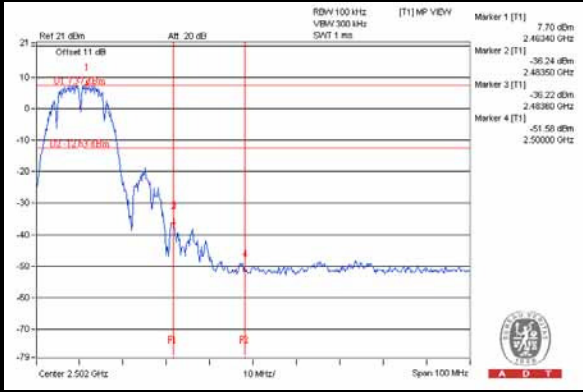






A D T

802.11g:



CH 1

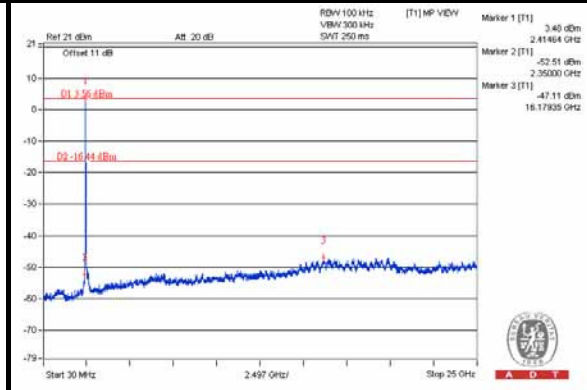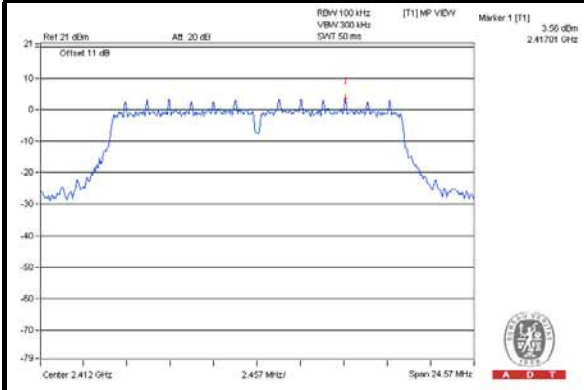

CH 6

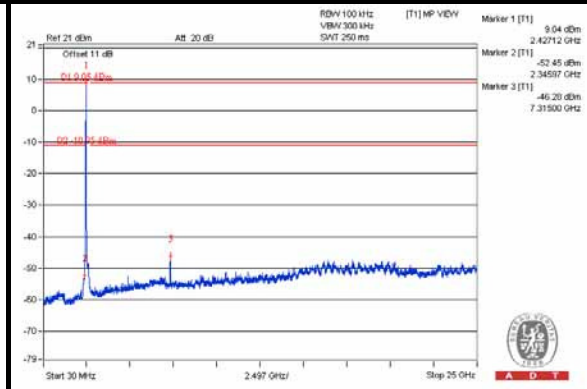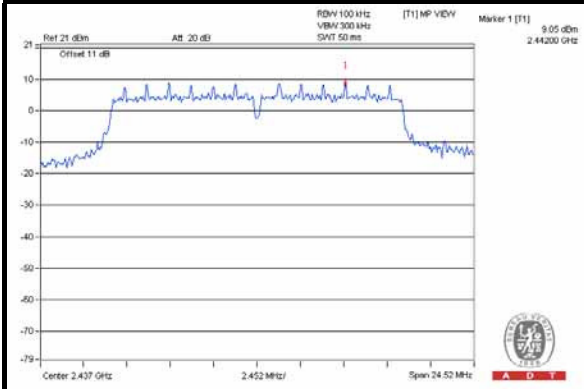


CH 11

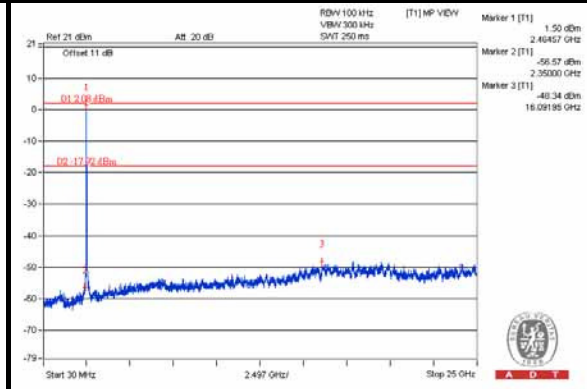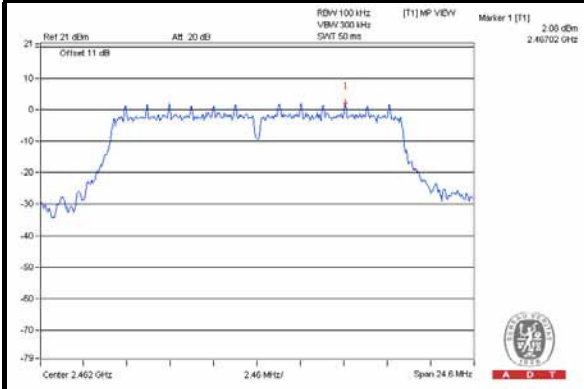




A D T

CH 1 Band edge

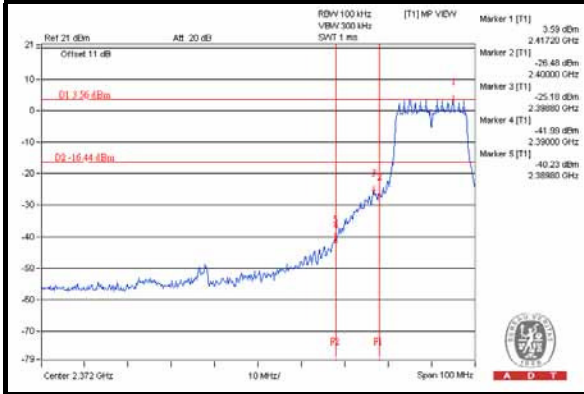

CH 11 Band edge

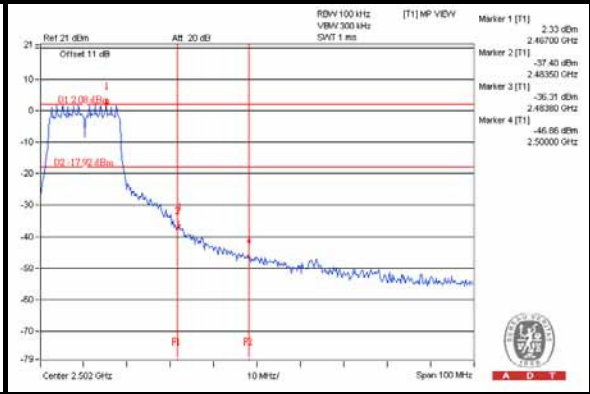





A D T

802.11n (HT20):


CH 1

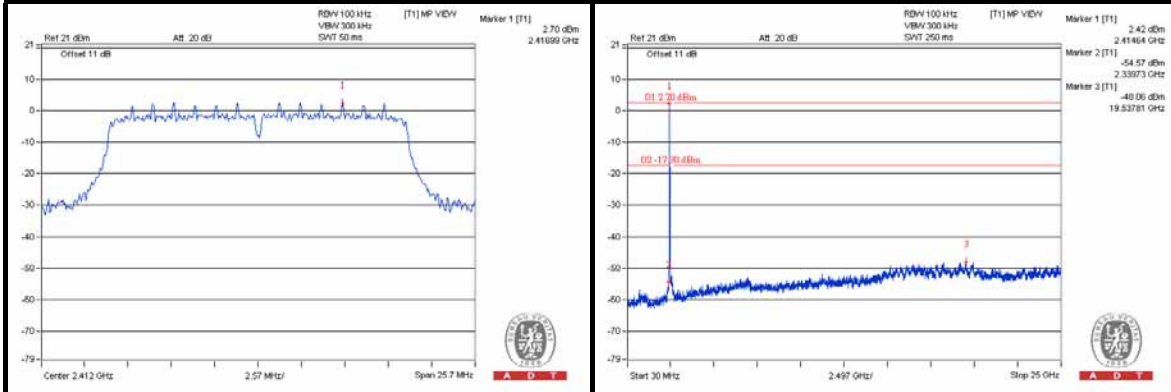

CH 6

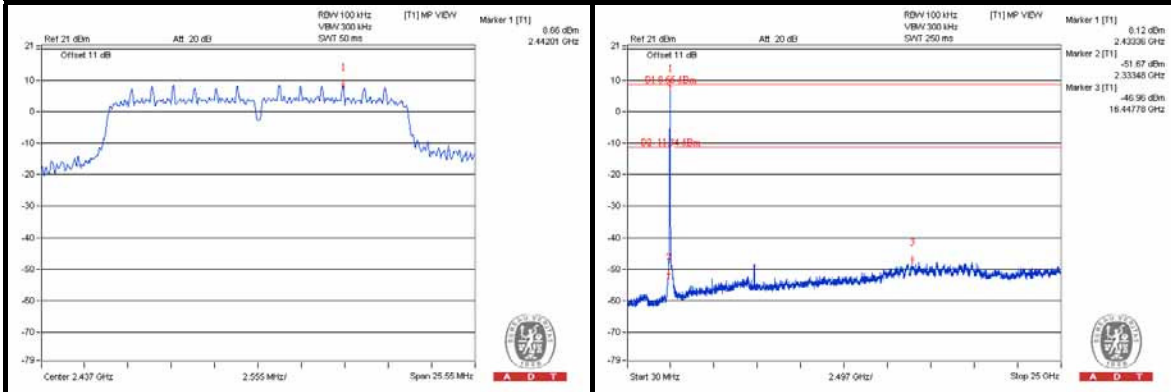


CH 11

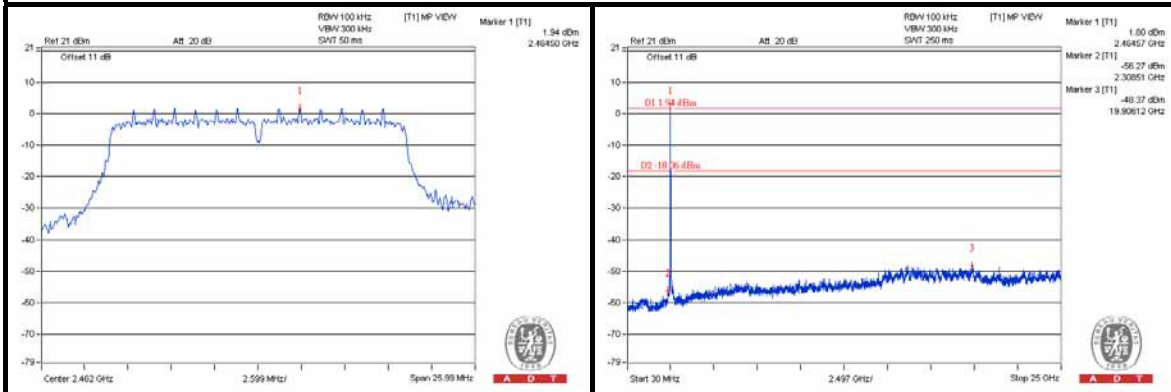




A D T

CH 1 Band edge

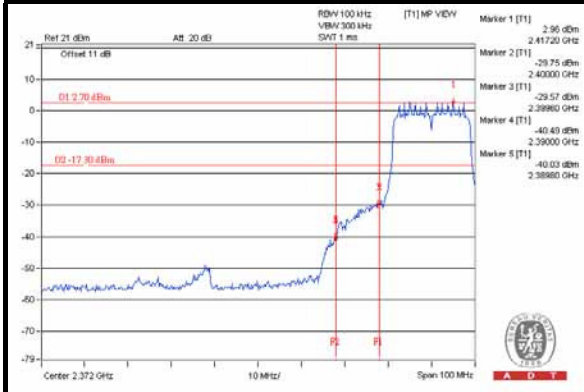

CH 11 Band edge

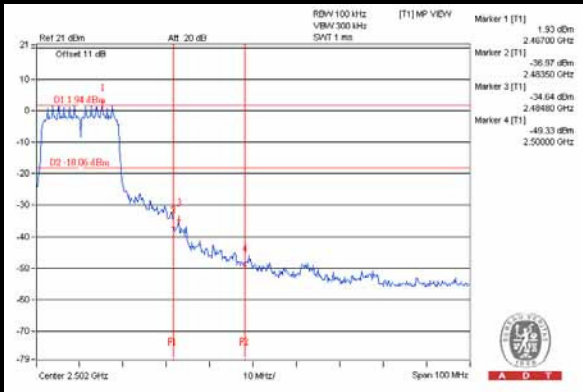



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---