




Appendix D. Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	51%
Test Engineer	Serway Li	Configurations	WLAN + GSM850 CH1 28 / Mode 2

Horizontal

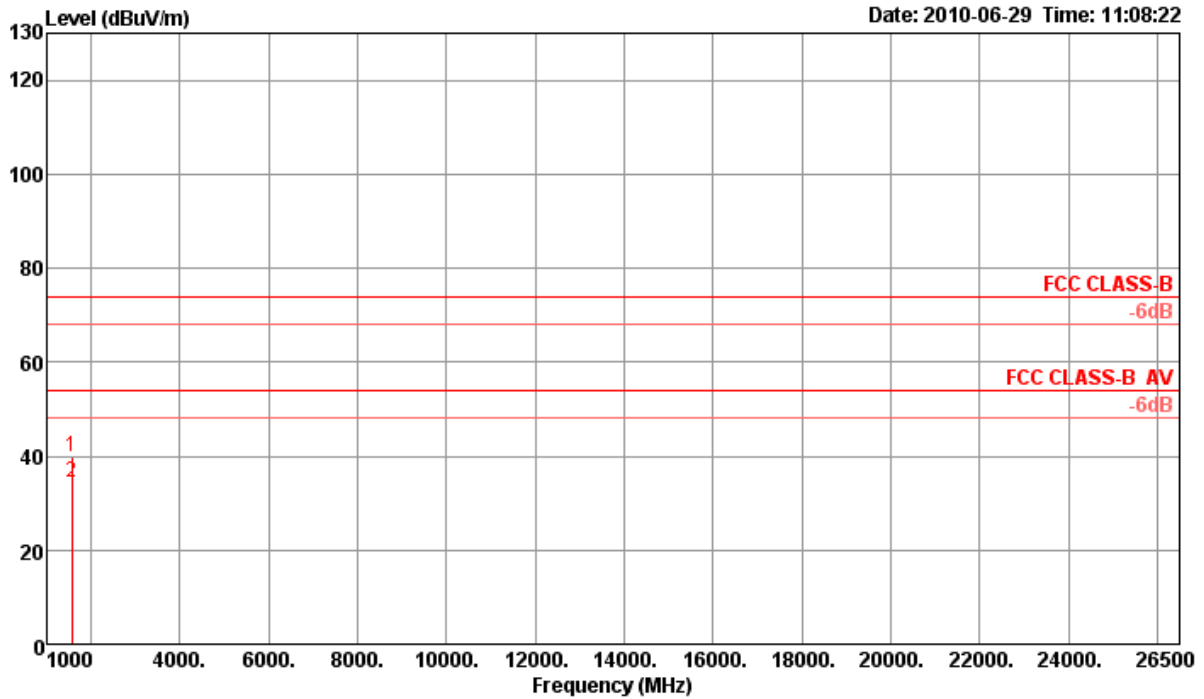

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1566.01	39.65	74.00	-34.35	47.30	2.18	25.63	35.46	315	100	Peak	HORIZONTAL
2	1566.10	34.26	54.00	-19.74	41.91	2.18	25.63	35.46	315	100	Average	HORIZONTAL

Vertical

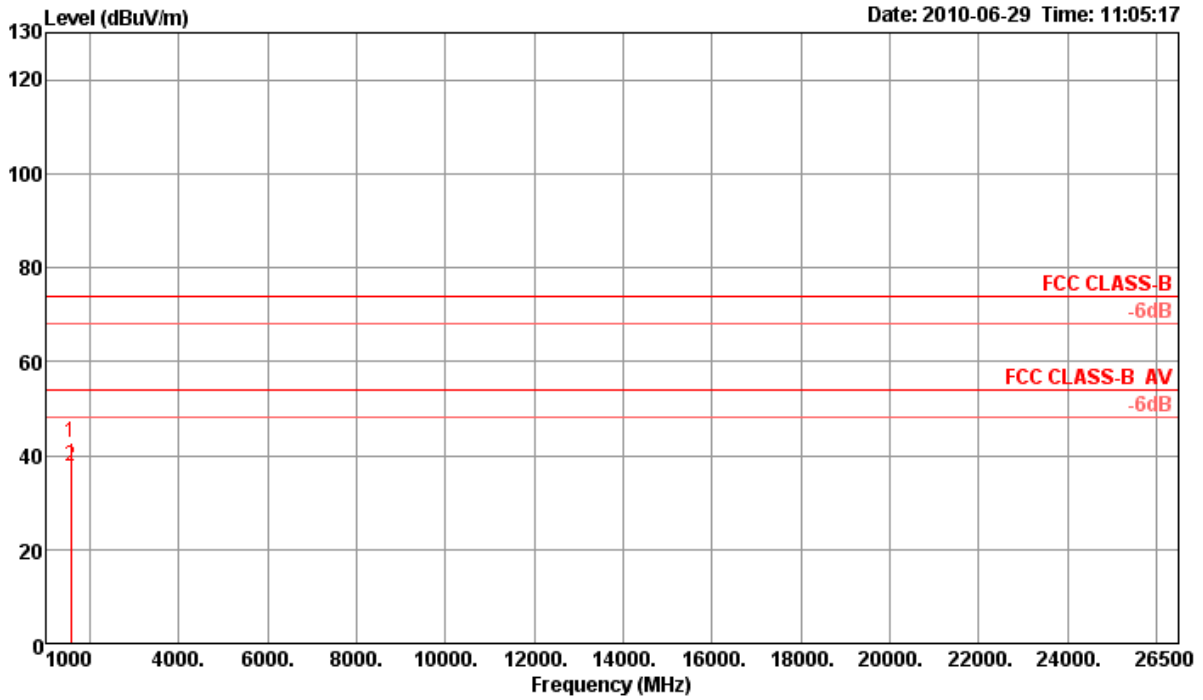

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	1565.87	42.67	74.00	-31.33	50.32	2.18	25.63	35.46	237	100 Peak	VERTICAL
2	1565.94	37.66	54.00	-16.34	45.31	2.18	25.63	35.46	237	100 Average	VERTICAL