



FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4 : 2003

TEST REPORT

For

Wireless N Router

Model : DIR-615

Trade Name : D-Link

Issued for

D-Link Corporation

**No. 289, Sinhu 3rd Rd., Neihu District, Taipei City 114,
Taiwan, R.O.C.**

Issued by

Compliance Certification Services Inc.

Hsinchu Lab.

NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

TEL: +886-3-5921698

FAX: +886-3-5921108



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	07/13/2009	Initial Issue	All Page 143	Alex Chiu



TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	5
2.1 DESCRIPTION OF EUT & POWER.....	5
3. DESCRIPTION OF TEST MODES.....	6
4. TEST METHODOLOGY.....	6
5. FACILITIES AND ACCREDITATIONS.....	7
5.1 FACILITIES.....	7
5.2 EQUIPMENT.....	7
5.3 LABORATORY ACCREDITATIONS LISTINGS.....	7
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	8
6. CALIBRATION AND UNCERTAINTY.....	9
6.1 MEASURING INSTRUMENT CALIBRATION.....	9
6.2 MEASUREMENT UNCERTAINTY.....	9
7. SETUP OF EQUIPMENT UNDER TEST.....	10-11
8. APPLICABLE LIMITS AND TEST RESULTS.....	12
8.1 6dB BANDWIDTH.....	12-25
8.2 99% BANDWIDTH.....	26-39
8.3 MAXIMUM PEAK OUTPUT POWER.....	40-54
8.4 MAXIMUM PERMISSIBLE EXPOSURE.....	55-56
8.5 AVERAGE POWER.....	57-59
8.6 POWER SPECTRAL DENSITY.....	60-79
8.7 CONDUCTED SPURIOUS EMISSION.....	80-96
8.8 RADIATED EMISSIONS.....	97
8.8.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS.....	97-100
8.8.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz.....	101-102
8.8.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz.....	103-114
8.8.4 RESTRICTED BAND EDGES.....	115-130
8.9 POWERLINE CONDUCTED EMISSIONS.....	131-136
APPENDIX SETUP PHOTOS.....	137-143



1. TEST REPORT CERTIFICATION

Applicant : D-Link Corporation
Address : No. 289, Sinhu 3rd Rd., Neihu District, Taipei City 114,
 Taiwan, R.O.C.
Equipment Under Test : Wireless N Router
Model : DIR-615
Trade Name : D-Link
Tested Date : June 19 ~ July 10, 2009

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C AND ANSI C63.4:2003	PASS

Approved by:

Reviewed by:

Alex Chiu
Director

Alan Fan
Section Manager

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



2. EUT DESCRIPTION

2.1 DESCRIPTION OF EUT & POWER

Product Name	Wireless N Router
Model Number	DIR-615
Frequency Range	IEEE 802.11b/g, 802.11n HT20 : 2412MHz ~ 2462MHz IEEE 802.11n HT40 : 2422MHz ~ 2452MHz
Transmit Power	IEEE 802.11b : 23.47dBm IEEE 802.11g : 21.29dBm IEEE 802.11n HT20 : 23.22dBm IEEE 802.11n HT40 : 22.76dBm
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40 : 5MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20 : 11 Channels IEEE 802.11n HT40 : 7 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 144.444, 130, 117, 115.556, 104, 86.667, 78, 72.2, 65, 58.5, 57.778, 52, 43.333, 39, 28.9, 26, 19.5, 21.7, 14.4, 13, 7.2, 6.5Mbps IEEE 802.11n HT40 : 300, 270, 243, 240, 216, 180, 162, 150, 135, 121.5, 120, 108, 90, 81, 60, 54, 45, 40.5, 30, 27, 15, 13.5Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Frequency Selection	by software / firmware
Antenna Type	Dipole Antenna × 2, Antenna Gain 1.8dBi
Power Source	5VDC, 2.5A (From Power Adapter)
I/O Port	WAN port × 1, LAN port × 4, Power port × 1
Note	Ralink RF Module Model:RT3052F

Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	D-Link	AMS3-0502500SU	100-120VAC , 60Hz , 0.5A/28VA	5V, 2.5A
2	D-Link	AMS3-0502500FU	100-240VAC , 50/60Hz , 0.5A/28VA	5V, 2.5A

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: KA2DIR615G1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.



3. DESCRIPTION OF TEST MODES

The EUT is an 802.11n MIMO transceiver in Wireless N Router form factor. It has two transmitter chains and two receive chains (2×2 configurations). The 2×2 configuration is implemented with two outside chains (Chain 0 and 1).

11b/g mode, only examines Chain 0, because only Chain 0 is functional according to the user diver of Ralink. The power is transmitted from TX0 only at 11b/g normal mode in Ralink solution.

The RF chipset is manufactured by Ralink Technology, Corp.

IEEE 802.11 b, 802.11g, 802.11n HT20 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 54Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode : 6.5Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode : 13.5Mbps data rate (worst case) were chosen for full testing.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2003 and FCC CRF 47 15.207, 15.209 and 15.247.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 : 2003 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.




Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 0240 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: 90585 and 90584).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 90585, 90584
Taiwan	TAF	FCC Method-47 CFR Part 15 Subpart C,D,E CISPR 11, FCC METHOD-47 CFR Part 18, EN 55011, CNS 13803, CISPR 13, CNS 13439, FCC Method-47 CFR Part 15 Subpart B, CISPR 14-1, EN 55014-1, CNS 13783-1, EN 55015, CNS 14115, CISPR 22, EN 55022, VCCI CNS 13438, EN 61000-4-2/3/4/5/6/8/11	
Taiwan	BSMI	CNS 13803, CNS 13438, CNS 13439, CNS 13783-1, CNS 14115	 SL2-IS-E-0002 SL2-IN-E-0002 SL2-A1-E-0002 SL2-R1-E-0002 SL2-R2-E-0002 SL2-L1-E-0002

** No part of this report may be used to claim or imply product endorsement by TAF or any agency of the US Government.*



6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4.

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 1000 MHz	+/- 3.2 dB
Radiated Emission, 1 to 26.5GHz	+/- 3.2 dB
Power Line Conducted Emission	+/- 2.1 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



7. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Notebook PC	DELL	Latitude D610	CN-0C4708-48643-625-5565	E2K24BNHM
2	Notebook PC	HP	nx6130	CNU543274R	CNTWM3B2200BGA
3	Notebook PC	IBM (LENOVO)	7663-AS6	L3F3864	DoC
4	SW HUB	ASUS	GX1008B	90-Q872AN1N0NAMA0-88Q SA1003522	DoC
5	Flash disk	SanDisk	SDSDM-1024	BB07251CTE	-----

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

RF

1. Set up all computers like the setup diagram.
2. The “Ralink QA Test Program for RT 3052 QA Firmware:Release Version 00.00/RT3502 QA UI:Release Version 1.0.0.2” software was used for testing(RF Type:RT3022 2T2R).

(1) TX Mode:

- ⇒ Tx Data Rate: MCS=0; LP 1Mbps Bandwidth 20 (IEEE 802.11b mode)
- MCS=7; 54Mbps Bandwidth 20 (IEEE 802.11g mode)
- MCS=0; 6.5Mbps Bandwidth 20 (IEEE 802.11n HT20 mode)
- MCS=0; 13.5Mbps Bandwidth 40 (IEEE 802.11n HT40 mode)

⇒ Power control

- IEEE 802.11b Channel Low (2412MHz) TX Power0 1F (only chain0 TX)
- IEEE 802.11b Channel Mid (2437MHz) TX Power0 1F (only chain0 TX)
- IEEE 802.11b Channel High (2462MHz) TX Power0 1A (only chain0 TX)
- IEEE 802.11g Channel Low (2412MHz) TX Power0 1F (only chain0 TX)
- IEEE 802.11g Channel Mid (2437MHz) TX Power0 1F (only chain0 TX)
- IEEE 802.11g Channel High (2462MHz) TX Power0 1F (only chain0 TX)



IEEE 802.11n HT20 Channel Low (2412MHz) TX Power0 1A /TX Power1 19
IEEE 802.11n HT20 Channel Mid (2437MHz) TX Power0 1E /TX Power1 1F
IEEE 802.11n HT20 Channel High (2462MHz) TX Power0 1E /TX Power1 1F
IEEE 802.11n HT40 Channel Low (2422MHz) TX Power0 18 /TX Power1 18
IEEE 802.11n HT40 Channel Mid (2437MHz) TX Power0 1E /TX Power1 1F
IEEE 802.11n HT40 Channel High (2452MHz) TX Power0 1B /TX Power1 1C

3. All of the function are under run.

4. Start test.

For Normal operating :

1. Set up all computers like the setup diagram.
2. All of the function are under run.
3. Notebook PC (1)(2)(3) ping 192.168.0.1 -t to EUT.
4. Notebook PC (1) ping -t to Notebook PC (3).
5. Start test.



8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6dB BANDWIDTH

LIMIT


§ 15.207(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
SPECTRUM ANALYZER	AGILENT	E4446A	MY43360132	06/09/2010
SPECTRUM ANALYZER	AGILENT	E4446A	MY46180323	05/26/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

**TEST RESULTS****IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10.08	500	PASS
Middle	2437	10.08	500	PASS
High	2462	10.17	500	PASS

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.42	500	PASS
Middle	2437	16.42	500	PASS
High	2462	16.42	500	PASS

IEEE 802.11n HT20 mode (Two TX)



Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	15.67	15.75	500	PASS
Middle	2437	16.83	16.00	500	PASS
High	2462	17.08	16.50	500	PASS


IEEE 802.11n HT40 mode (Two TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2422	32.83	34.50	500	PASS
Middle	2437	33.58	34.17	500	PASS
High	2452	34.75	34.33	500	PASS





6dB BANDWIDTH (IEEE 802.11b mode)

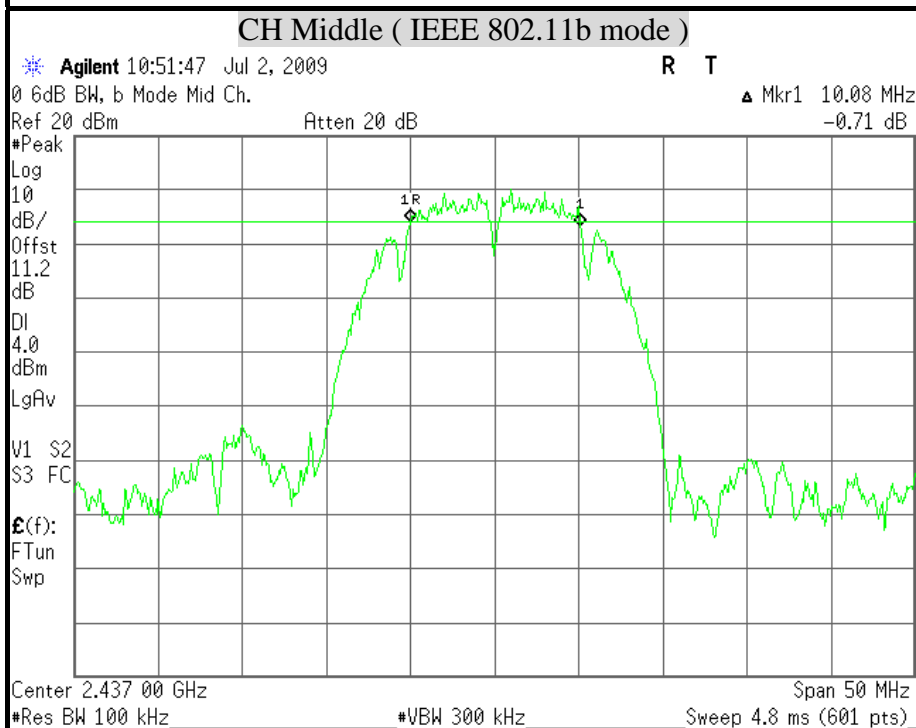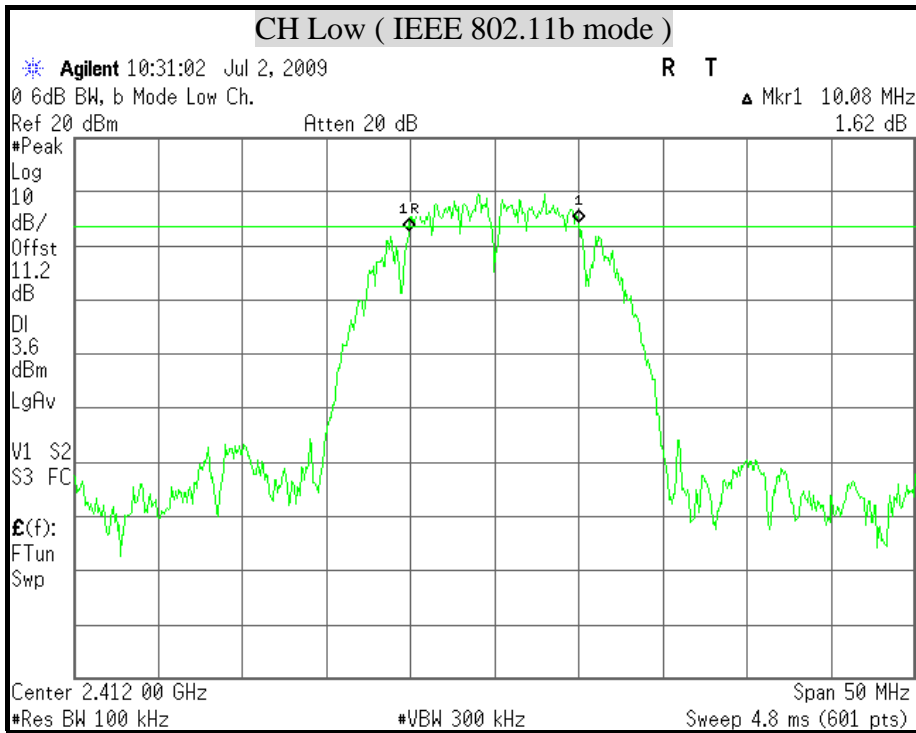


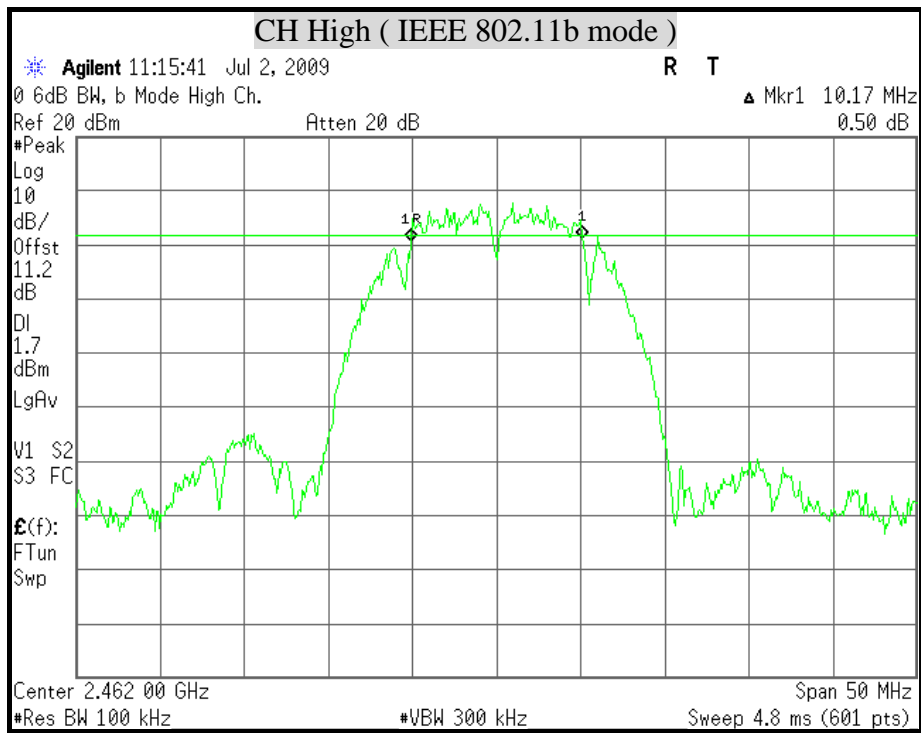





6dB BANDWIDTH (IEEE 802.11g mode)

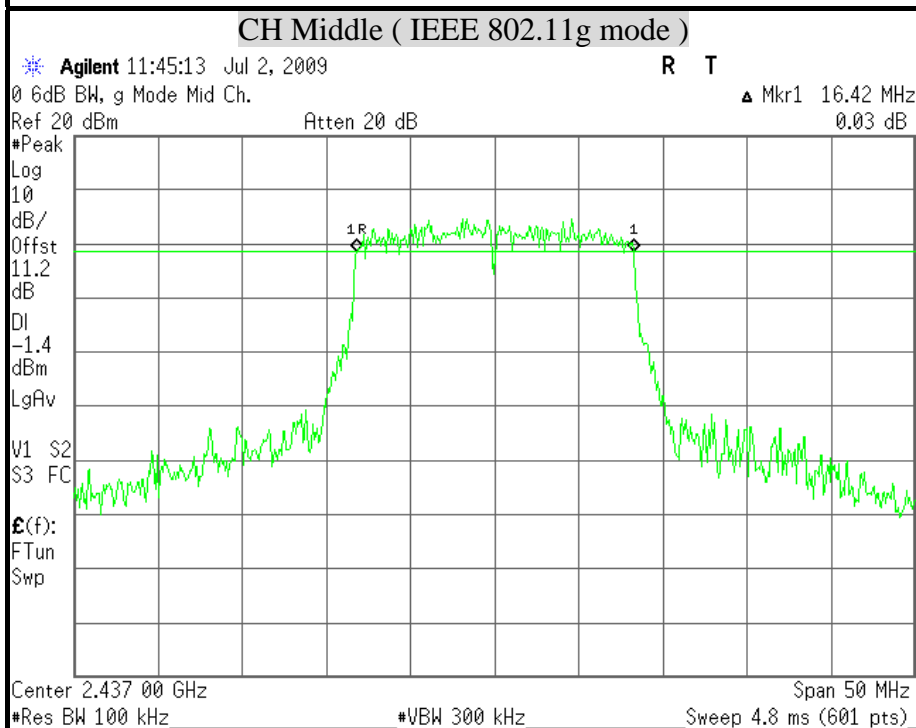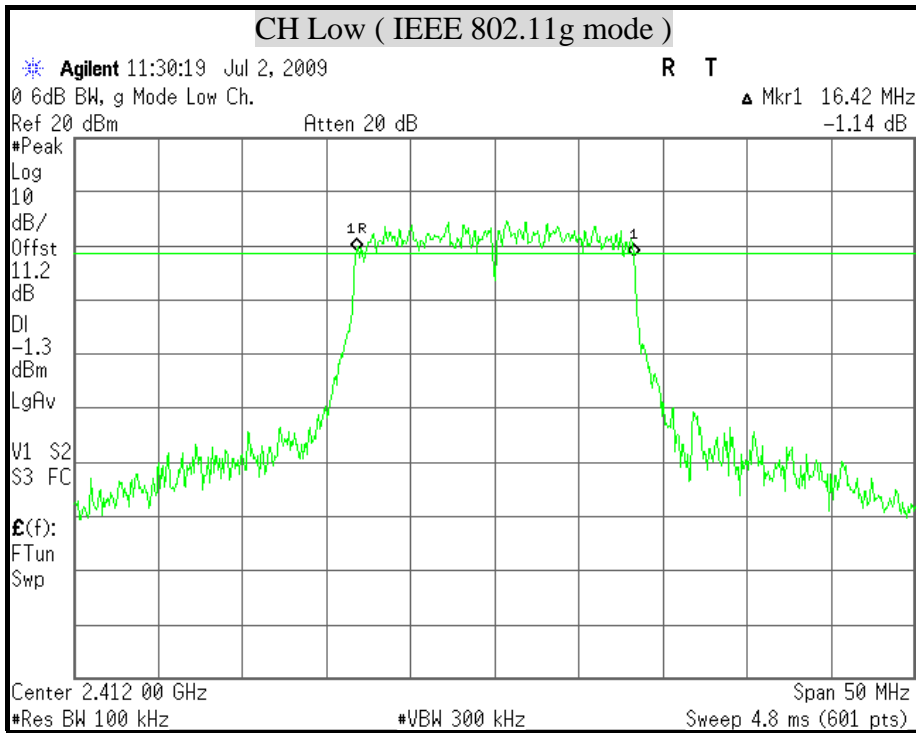



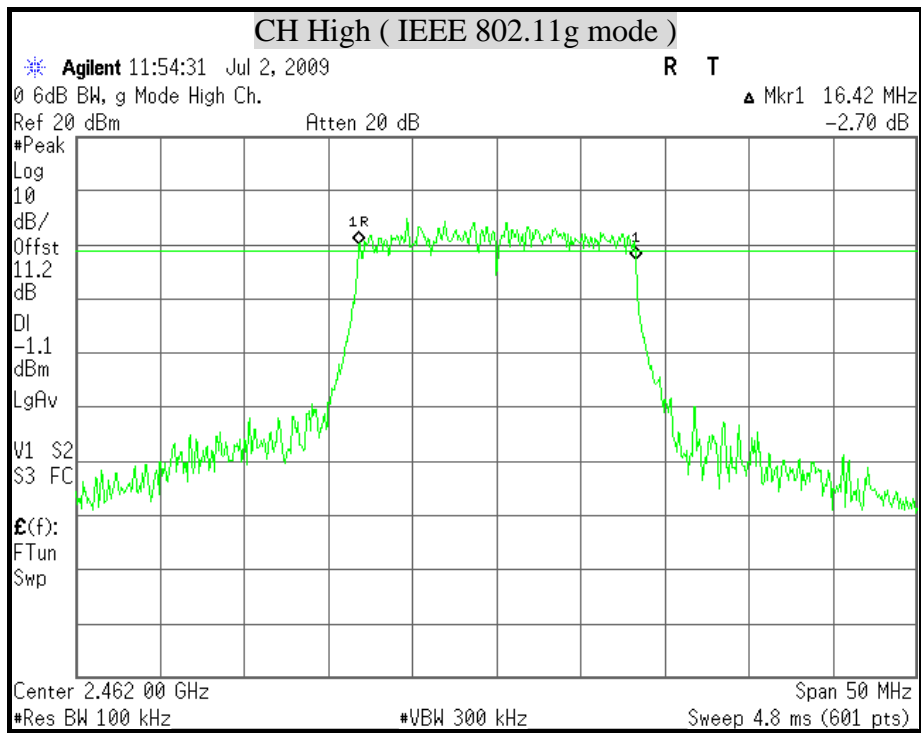





6dB BANDWIDTH (IEEE 802.11n HT20 mode)

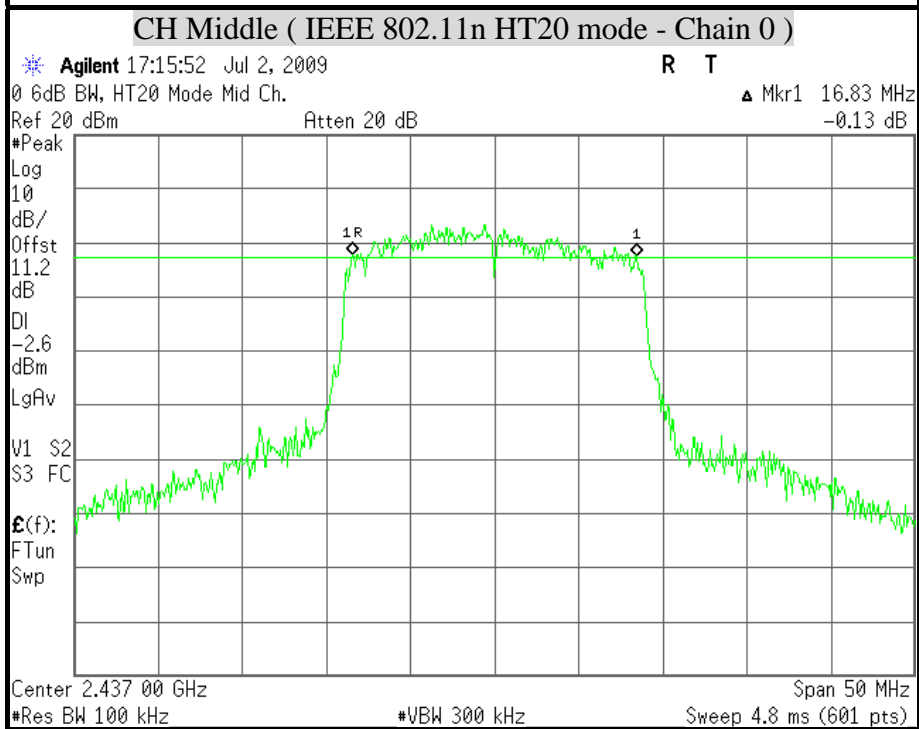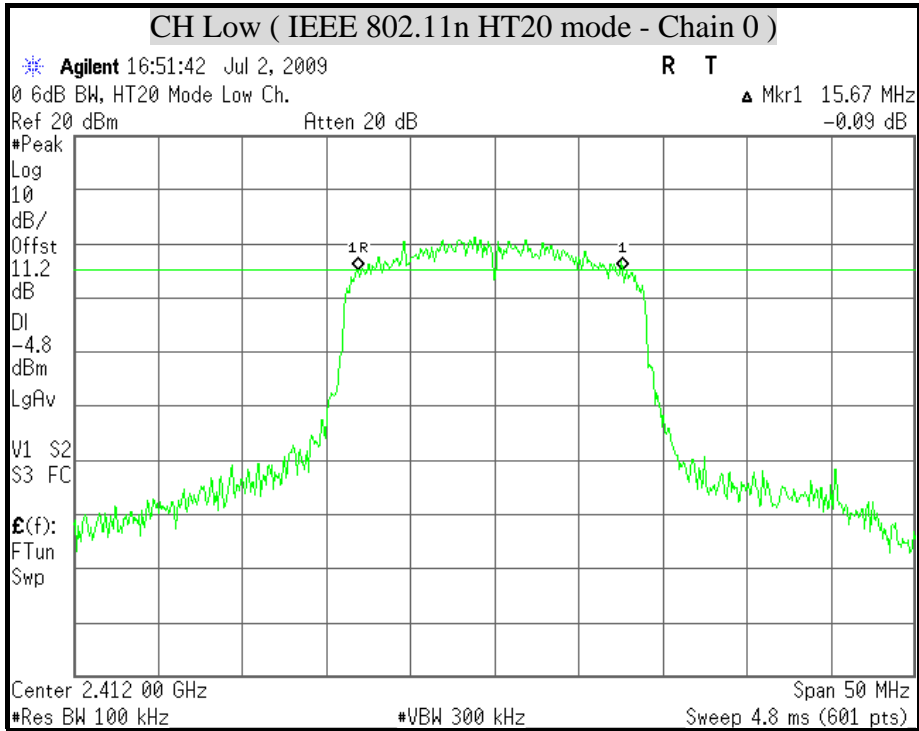


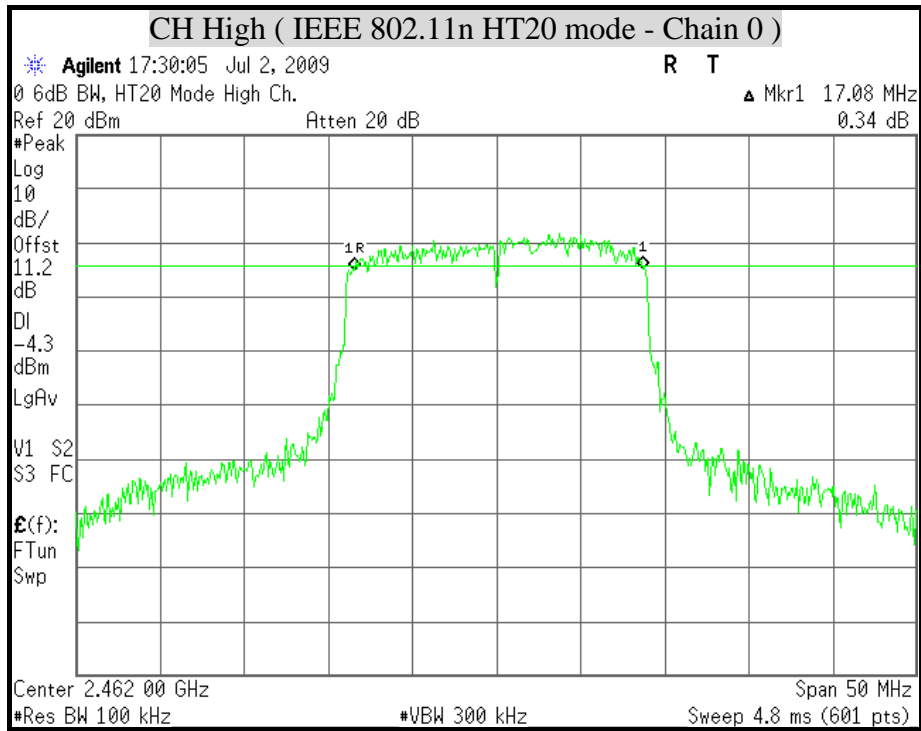


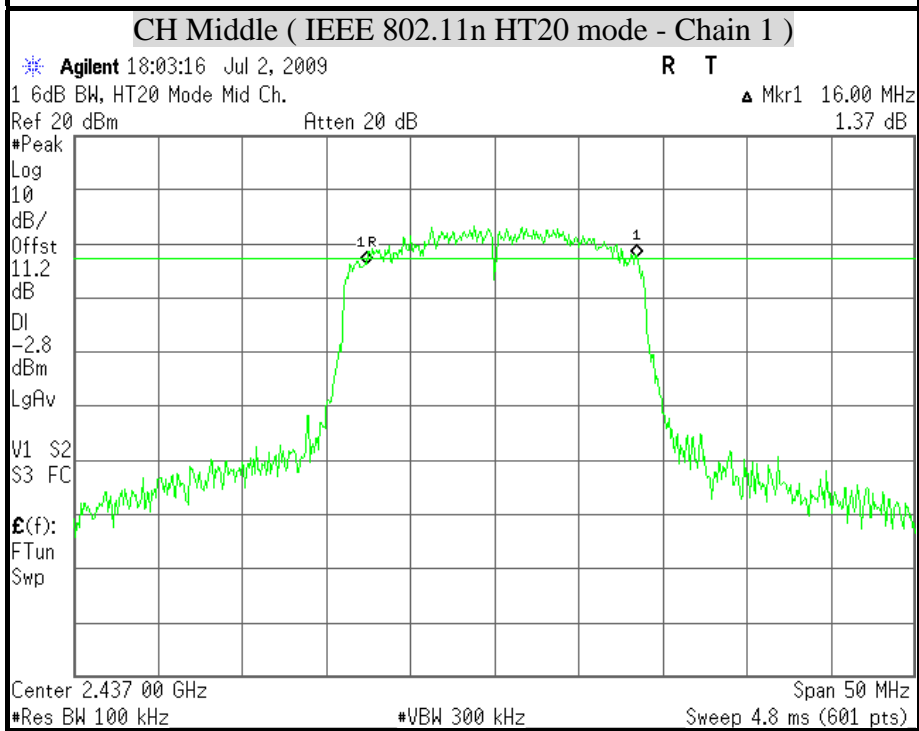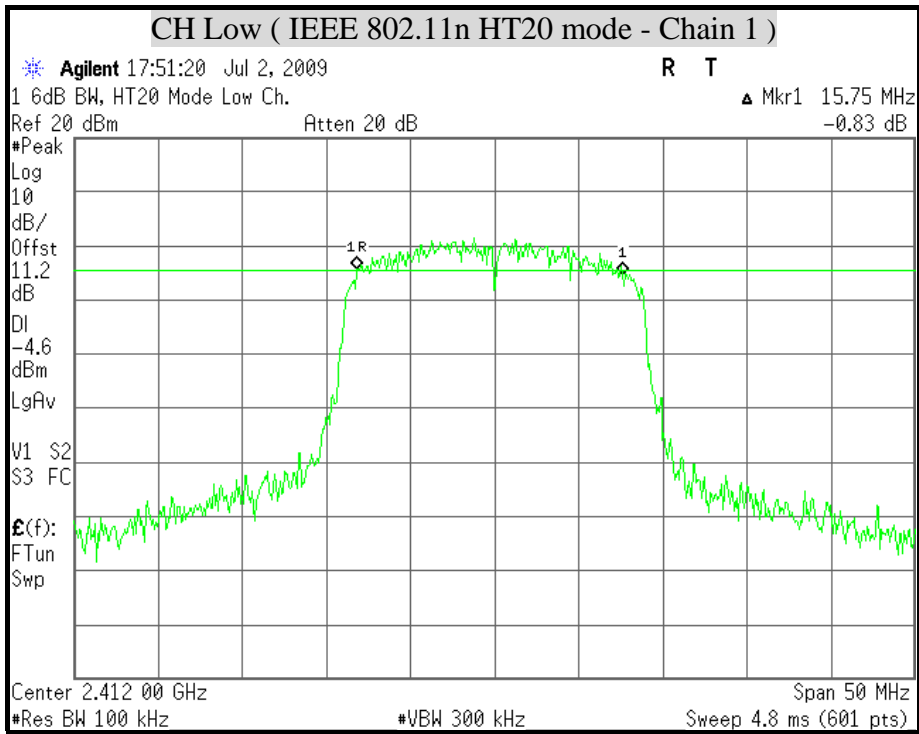



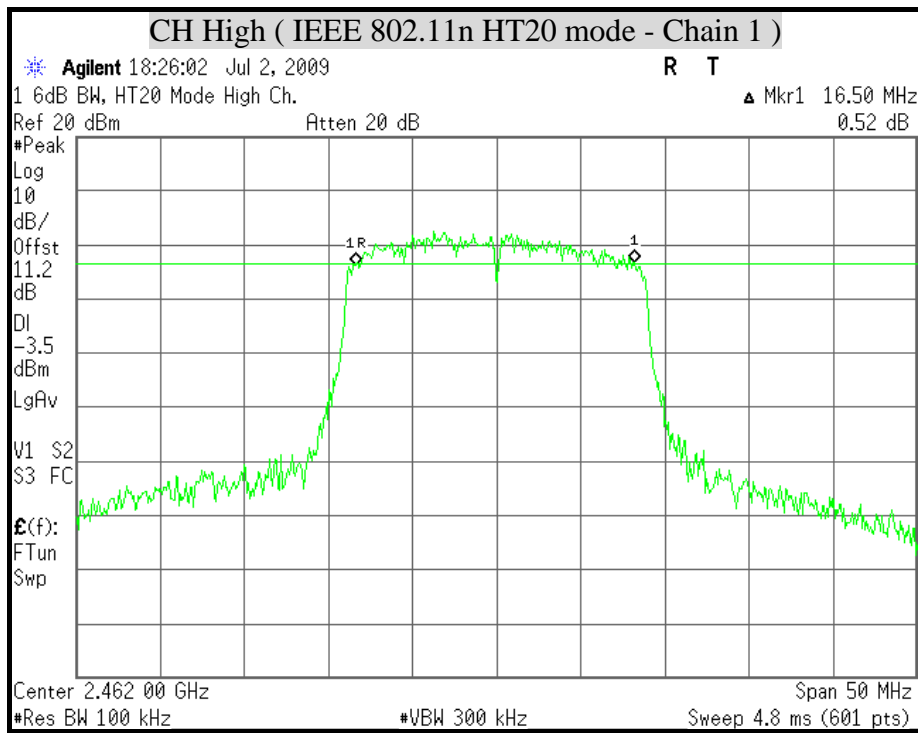





6dB BANDWIDTH (IEEE 802.11n HT40 mode)

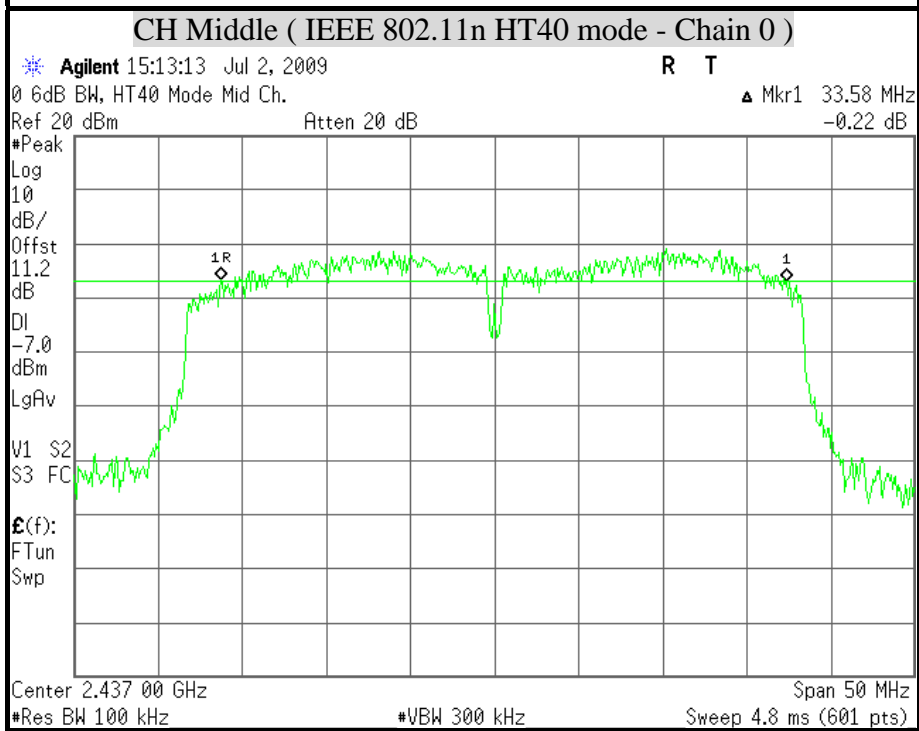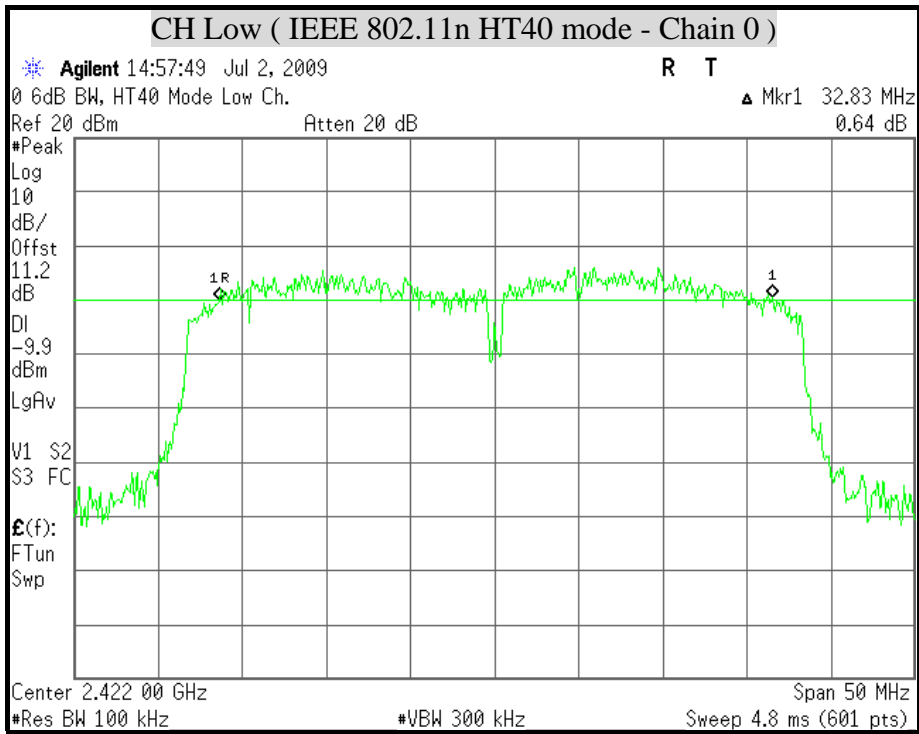

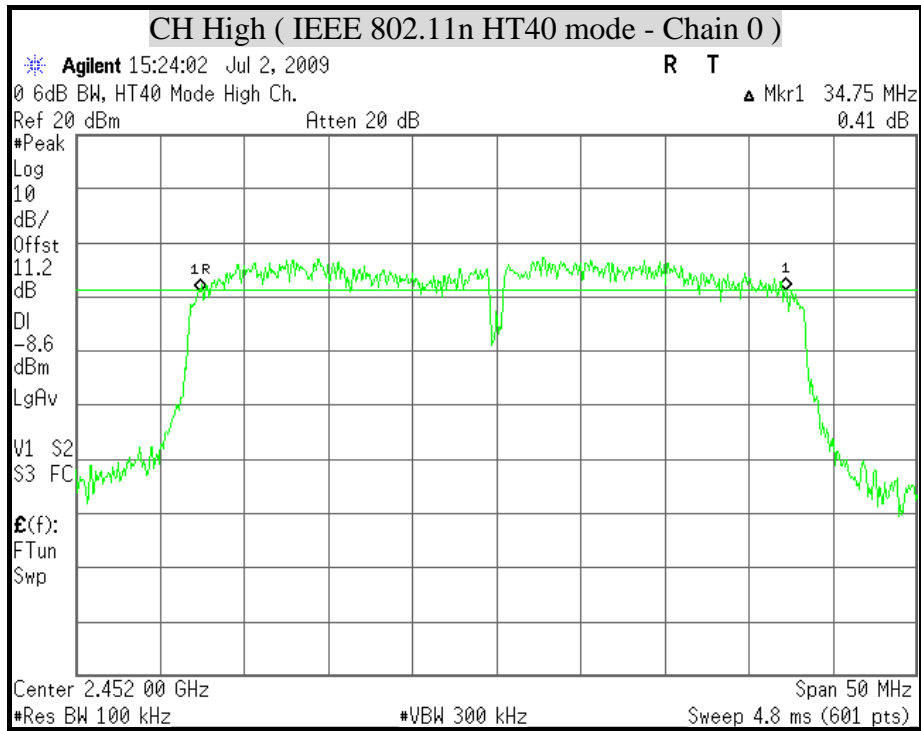

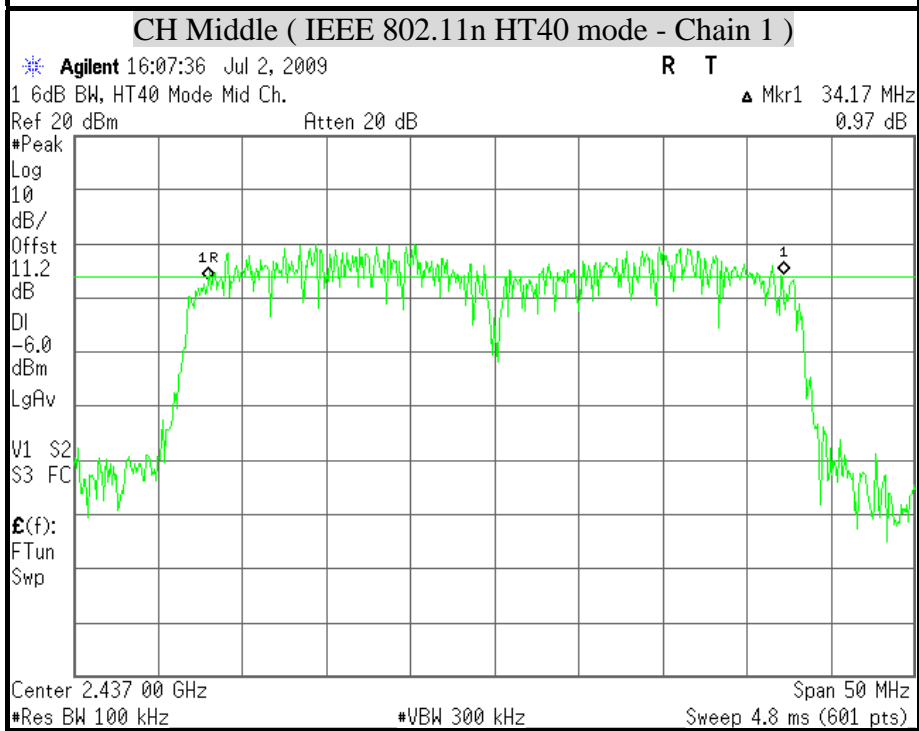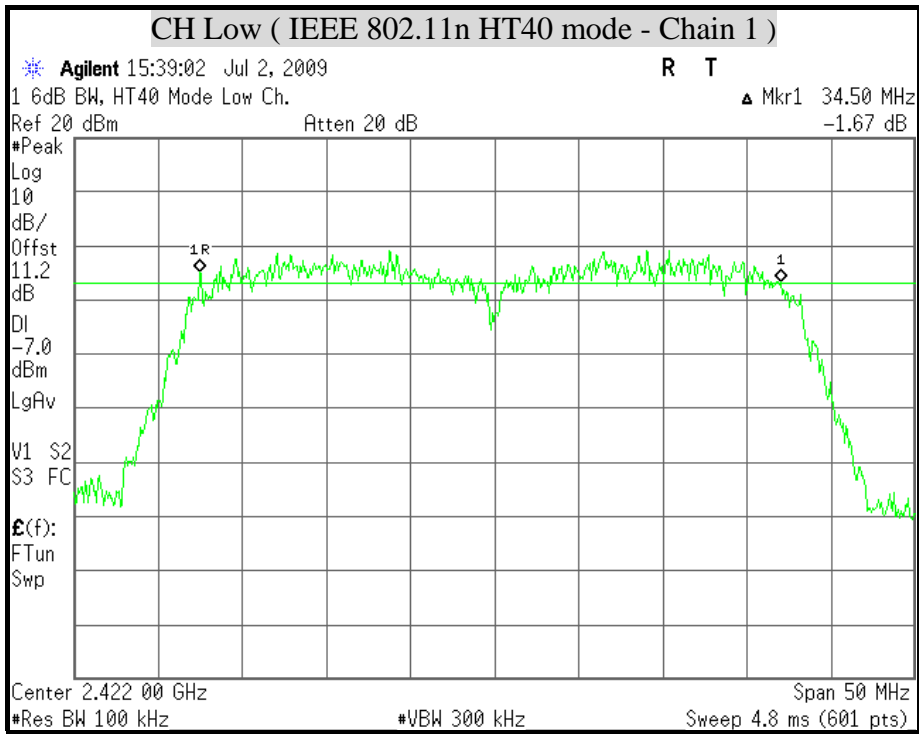

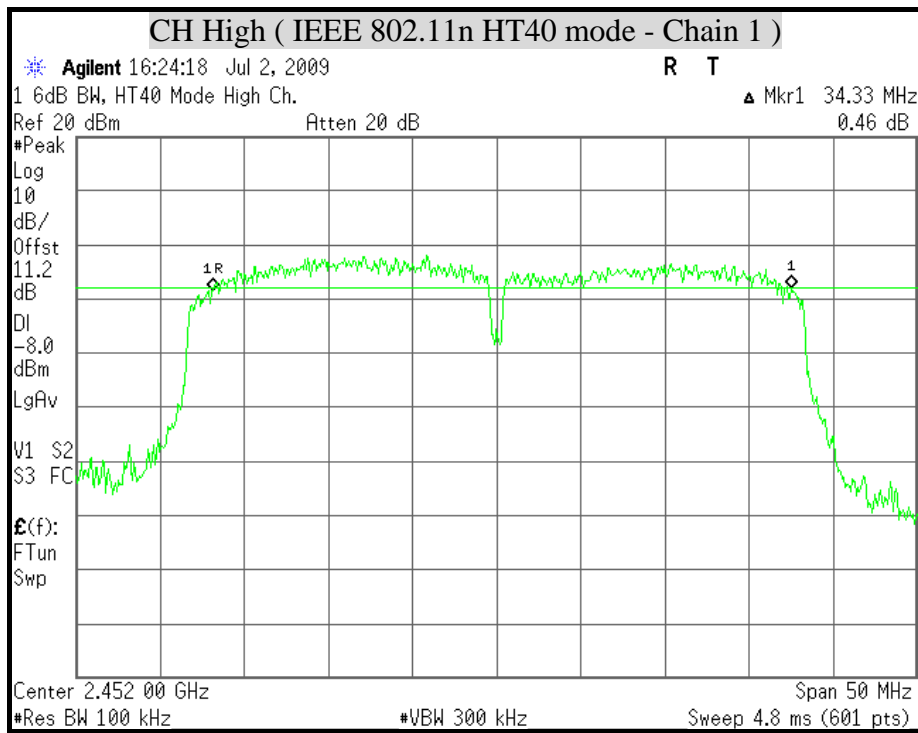



8.2 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
SPECTRUM ANALYZER	AGILENT	E4446A	MY43360132	06/09/2010
SPECTRUM ANALYZER	AGILENT	E4446A	MY46180323	05/26/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The spectrum shall be set as follows :

Span : The minimum span to fully display the emission and approximately 20dB below peak level.

RBW : The set to 1% to 3% of the approximate emission width.

2. Compute the combined power of all signal responses contained in the trace by covering all the data points.

3. For 99% occupied BW, place the markers at the frequency at which 0.5% of the power lies to the right of the right marker and 0.5% of the power lies to the left of the left marker.

4. The 99% BW is the bandwidth between the right and left markers.

**TEST RESULTS****IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	99% Occupied power bandwidth (MHz)
Low	2412	14.399
Middle	2437	14.531
High	2462	14.500

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	99% Occupied power bandwidth (MHz)
Low	2412	16.189
Middle	2437	16.405
High	2462	16.368

IEEE 802.11n HT20 mode (Two TX)



Channel	Channel Frequency (MHz)	99% Occupied power bandwidth (MHz)	
		Chain 0	Chain 1
Low	2412	16.927	17.050
Middle	2437	17.294	17.365
High	2462	17.405	17.410


IEEE 802.11n HT40 mode (Two TX)

Channel	Channel Frequency (MHz)	99% Occupied power bandwidth (MHz)	
		Chain 0	Chain 1
Low	2422	35.089	35.723
Middle	2437	35.222	35.317
High	2452	35.672	35.274





99% BANDWIDTH (IEEE 802.11b mode)

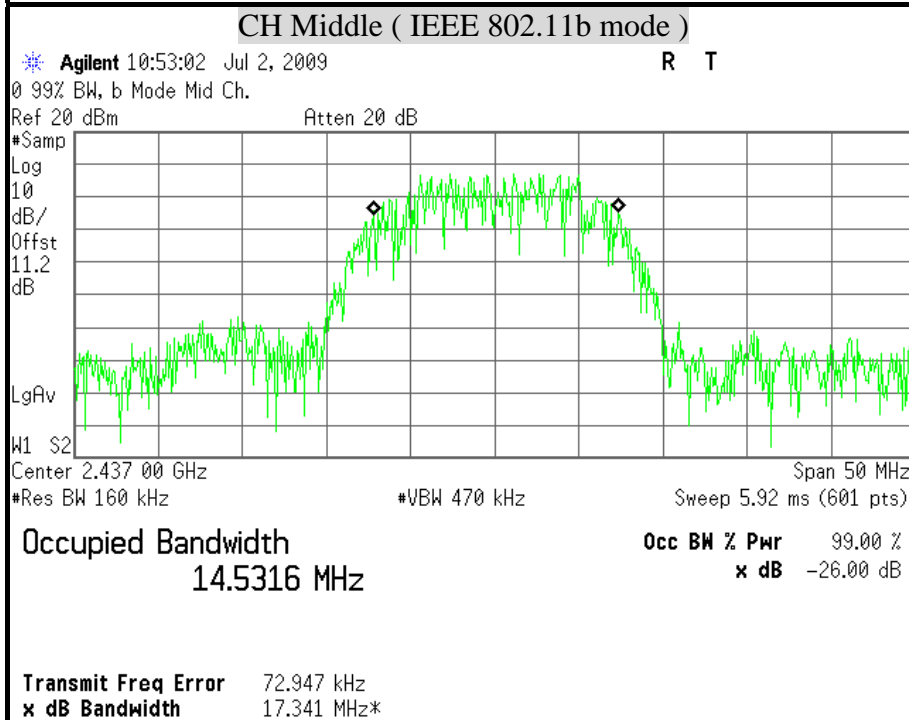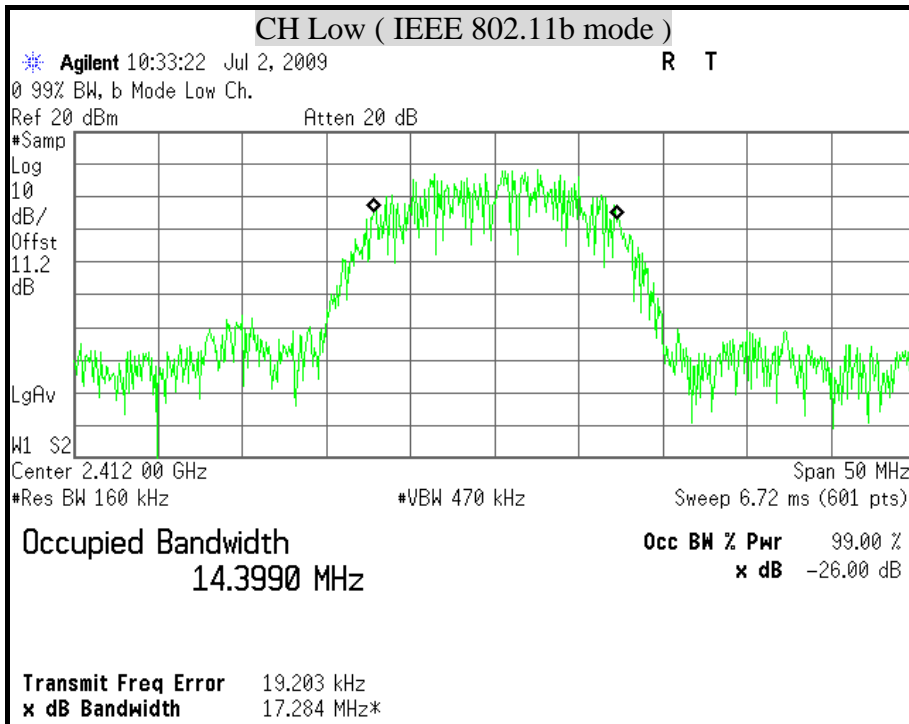


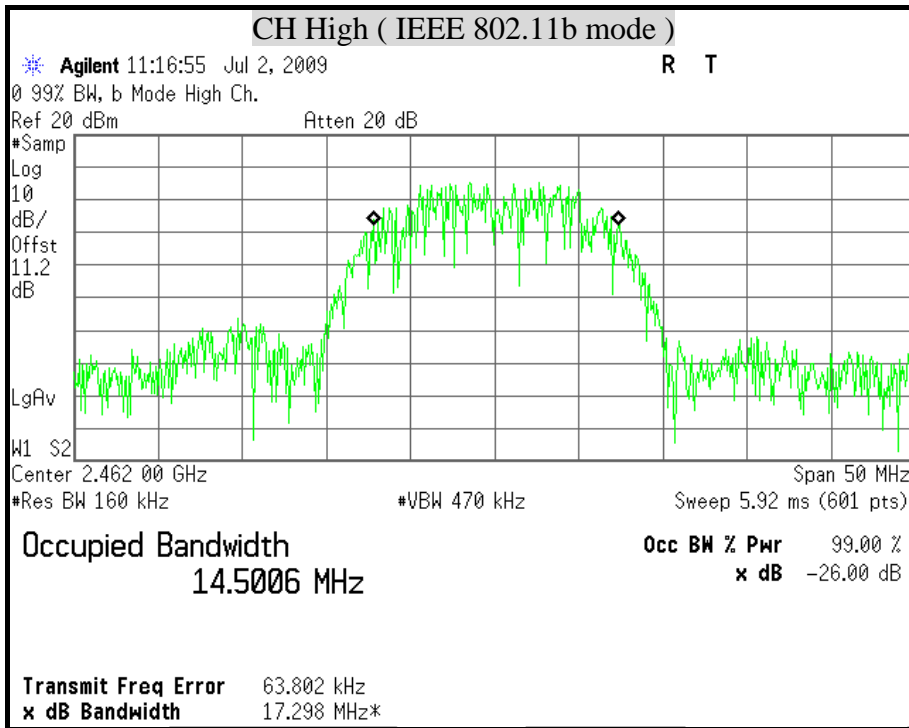





99% BANDWIDTH (IEEE 802.11g mode)

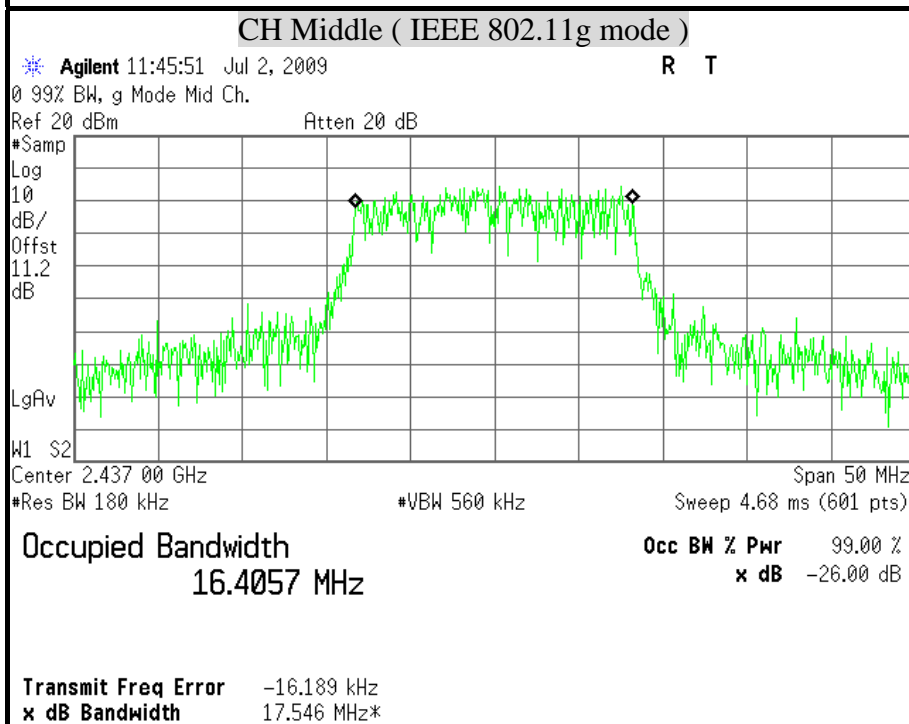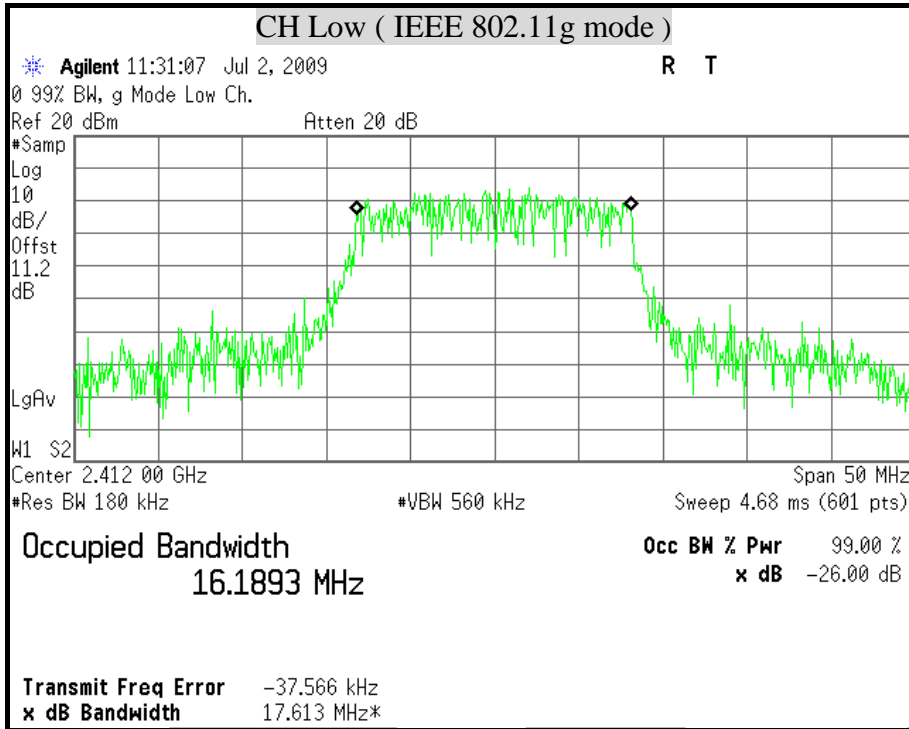



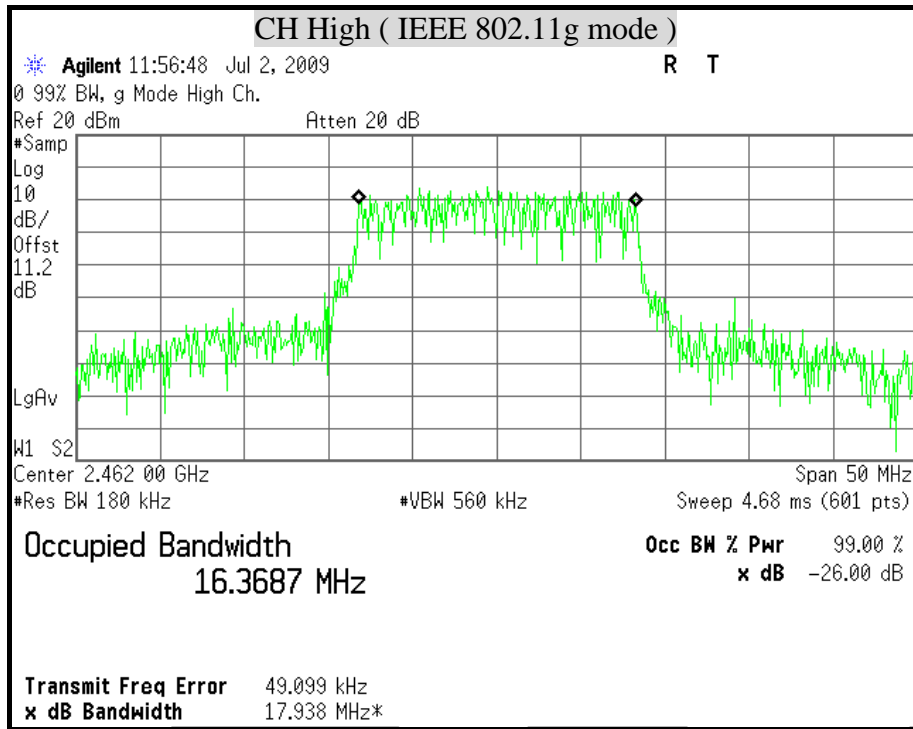





99% BANDWIDTH (IEEE 802.11n HT20 mode)

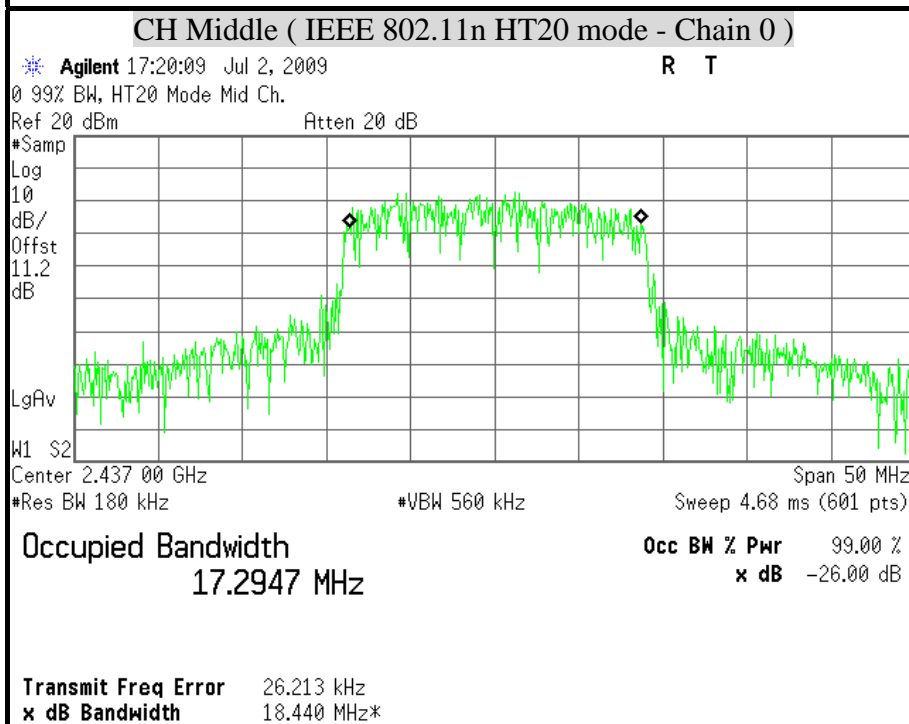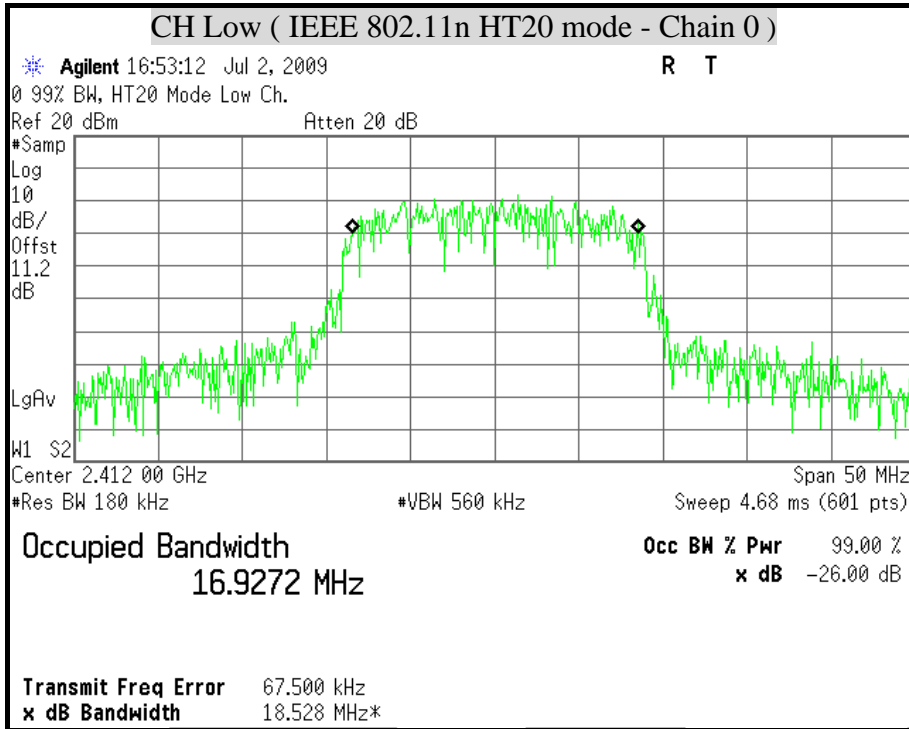


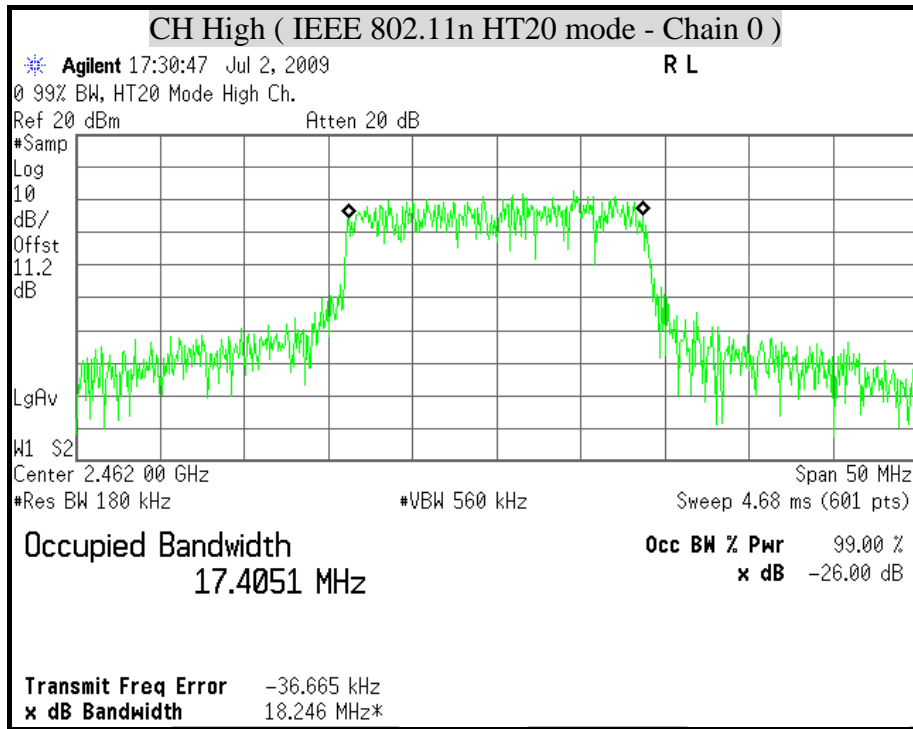


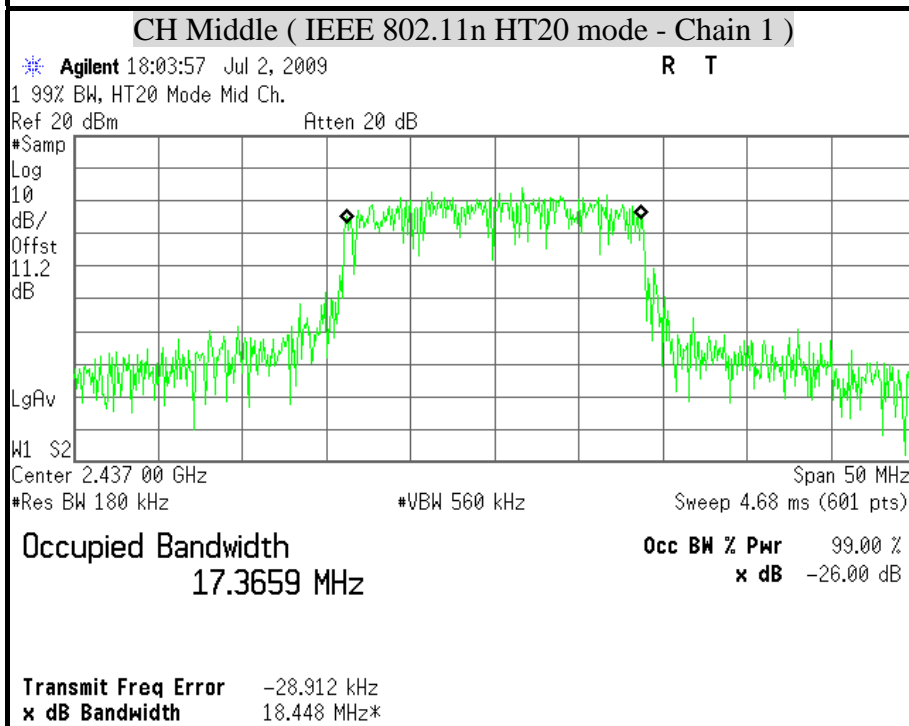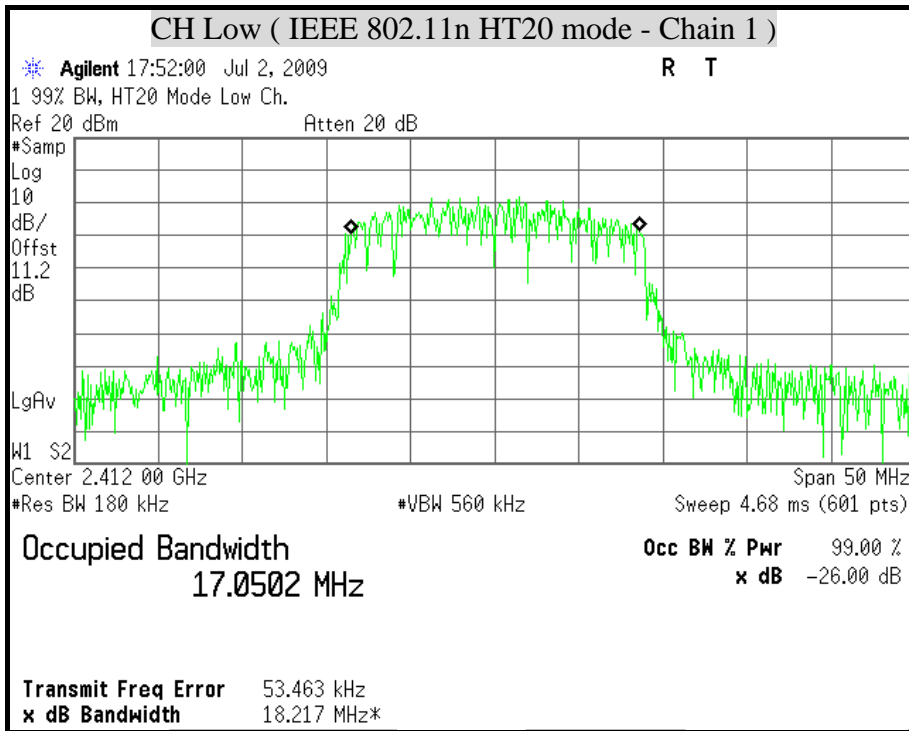



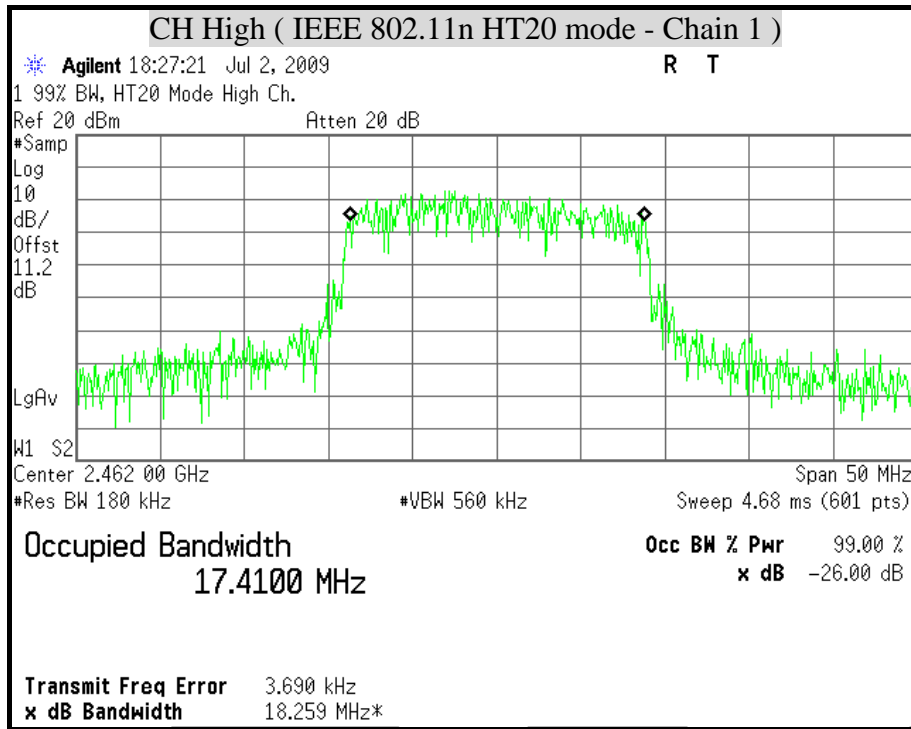





99% BANDWIDTH (IEEE 802.11n HT40 mode)

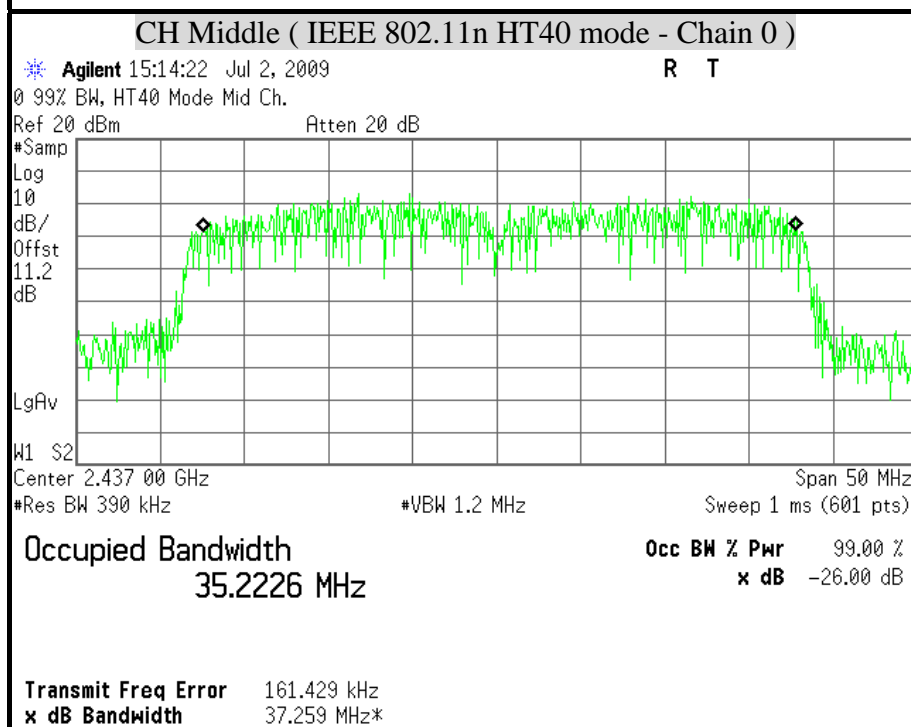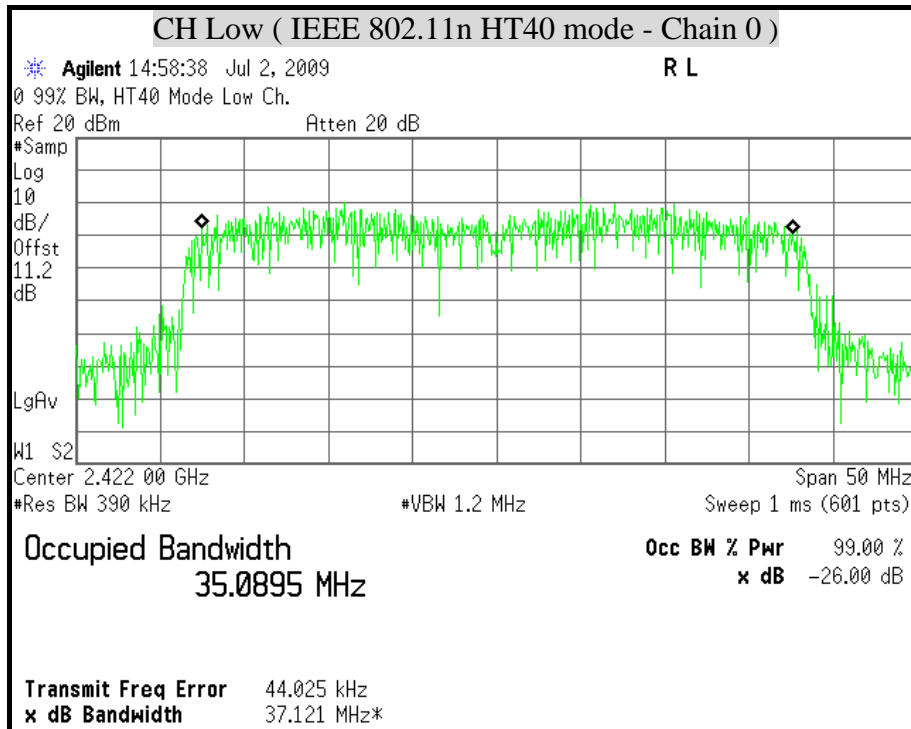

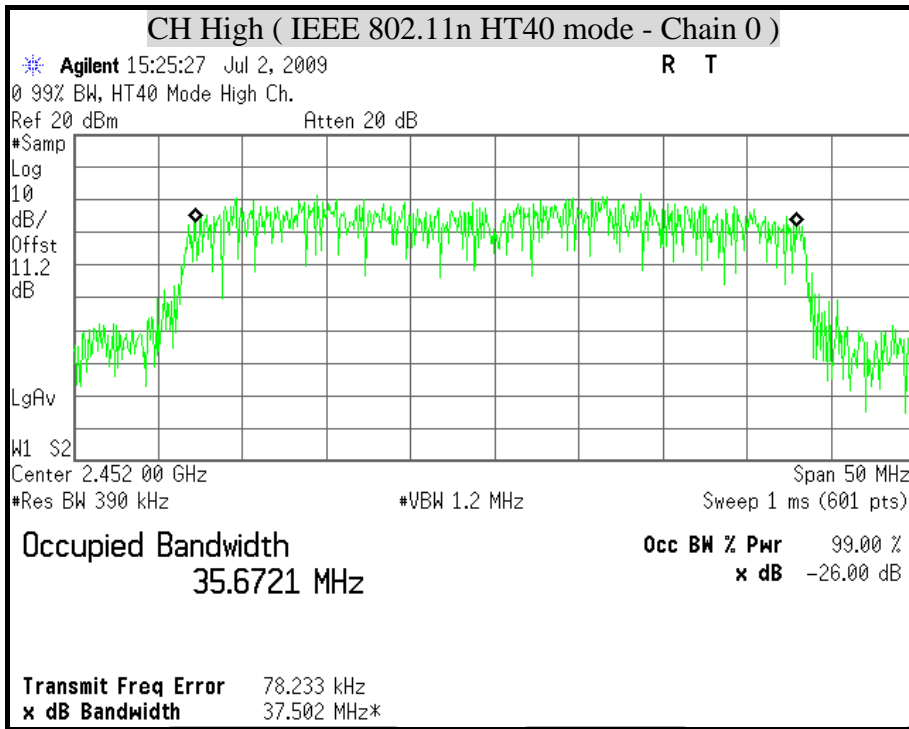

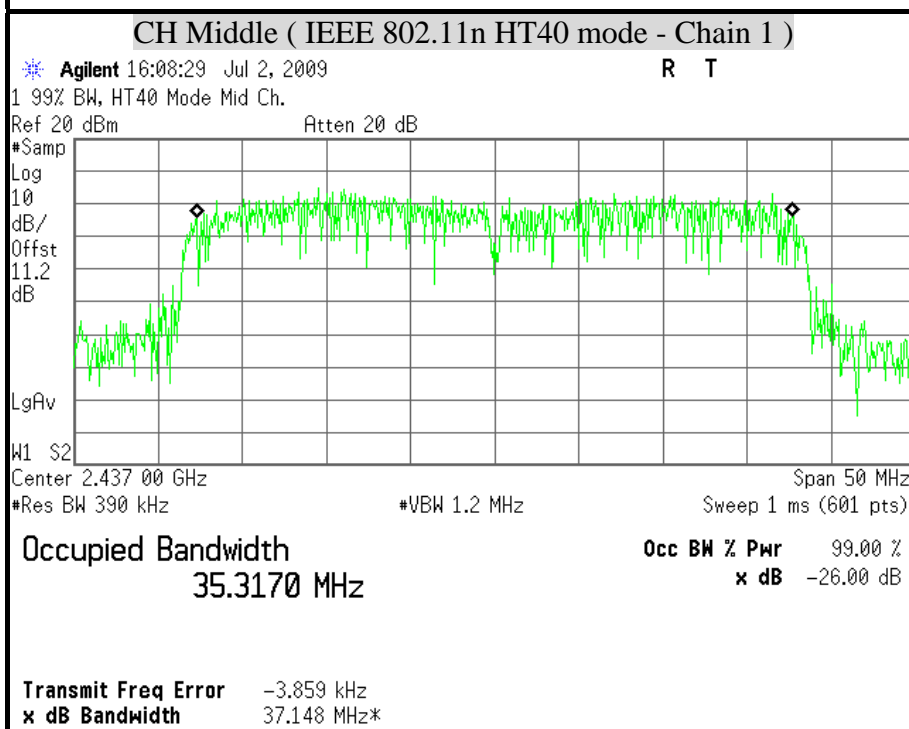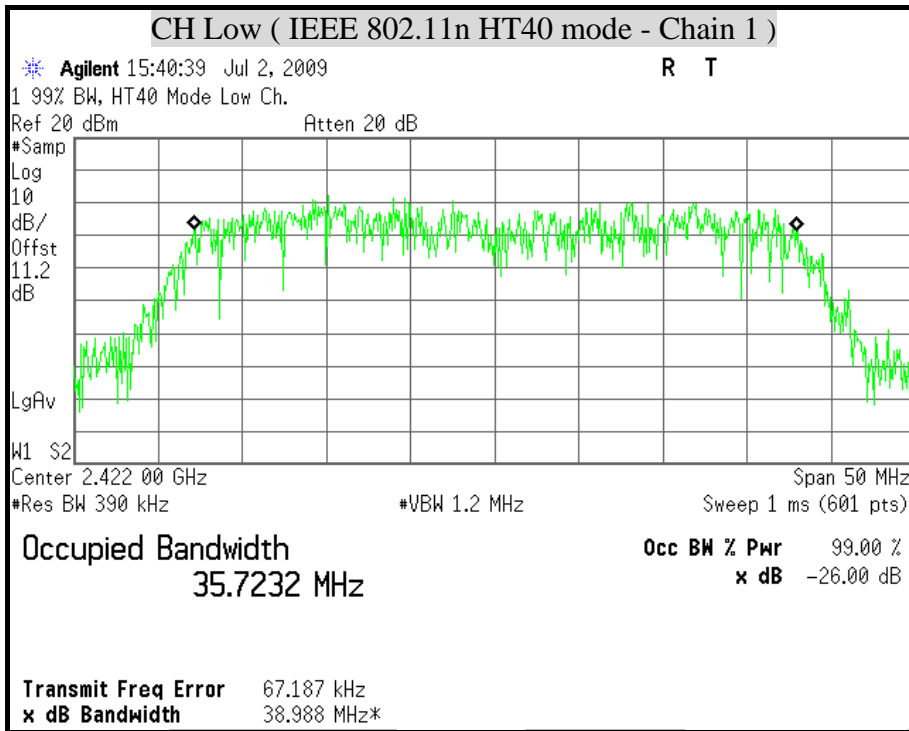

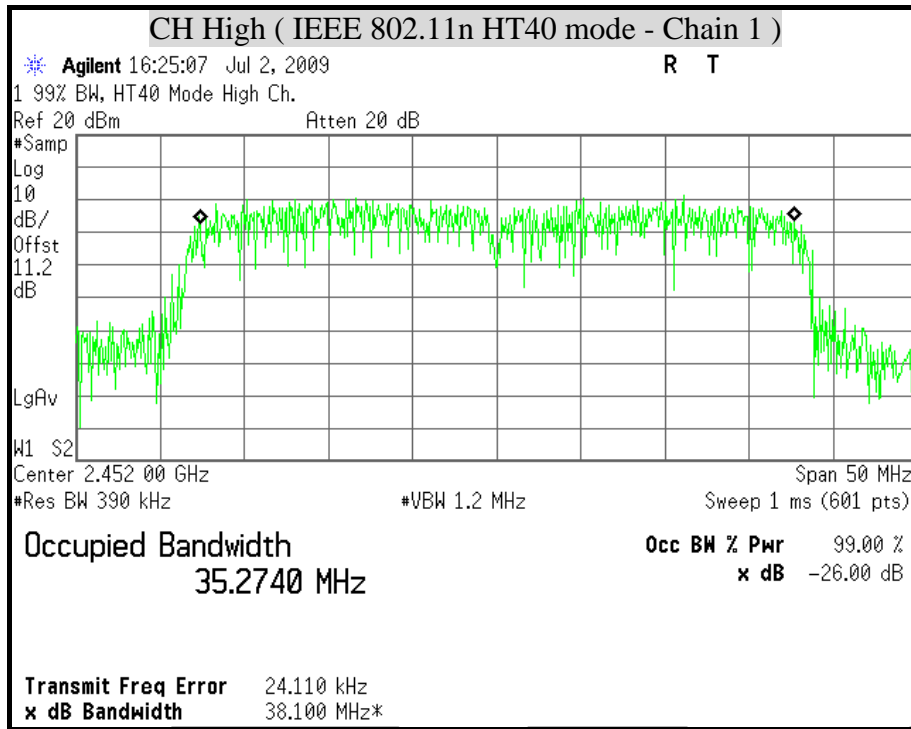



8.3 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
SPECTRUM ANALYZER	AGILENT	E4446A	MY43360132	06/09/2010
SPECTRUM ANALYZER	AGILENT	E4446A	MY46180323	05/26/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

- The spectrum shall be set as follows :
 - Span : 1.5 times channel integration bandwidth.
 - RBW : 1MHz
 - VBW : 3MHz
 - Detector : Peak
 - Sweep : Single trace
- Compute the combined power of all signal responses contained in the trace by covering all the data points.
- For 99% occupied BW, place the markers at the frequency at which 0.5% of the power lies to the right of the right marker and 0.5% of the power lies to the left of the left marker.
- The peak output power is the channel power integrated over 99% bandwidth.

**TEST RESULTS**

Total peak power calculation formula:

$$10 \log (10^{\text{Chain 0 Power} / 10} + 10^{\text{Chain1 Power} / 10}).$$

The maximum antenna gain is 1.8 dBi, therefore the limit is 30 dBm.

In the legacy mode, the effective antenna gain is $1.8 + 10 \times \text{Log} (2) = 4.81$ dBi.

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	23.36	30	PASS
Middle	2437	23.47	30	PASS
High	2462	21.31	30	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	21.06	30	PASS
Middle	2437	21.25	30	PASS
High	2462	21.29	30	PASS

Remark:

1. At final test to get the worst-case emission at 54Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 mode (Two TX)**

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	18.17	18.99	21.60	30.00	PASS
Middle	2437	19.81	20.59	23.22	30.00	PASS
High	2462	19.37	19.57	22.48	30.00	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode (Two TX)



Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	16.24	17.57	19.96	30.00	PASS
Middle	2437	18.96	20.43	22.76	30.00	PASS
High	2452	17.78	18.02	20.91	30.00	PASS


Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.





MAXIMUM PEAK OUTPUT POWER (IEEE 802.11b mode)

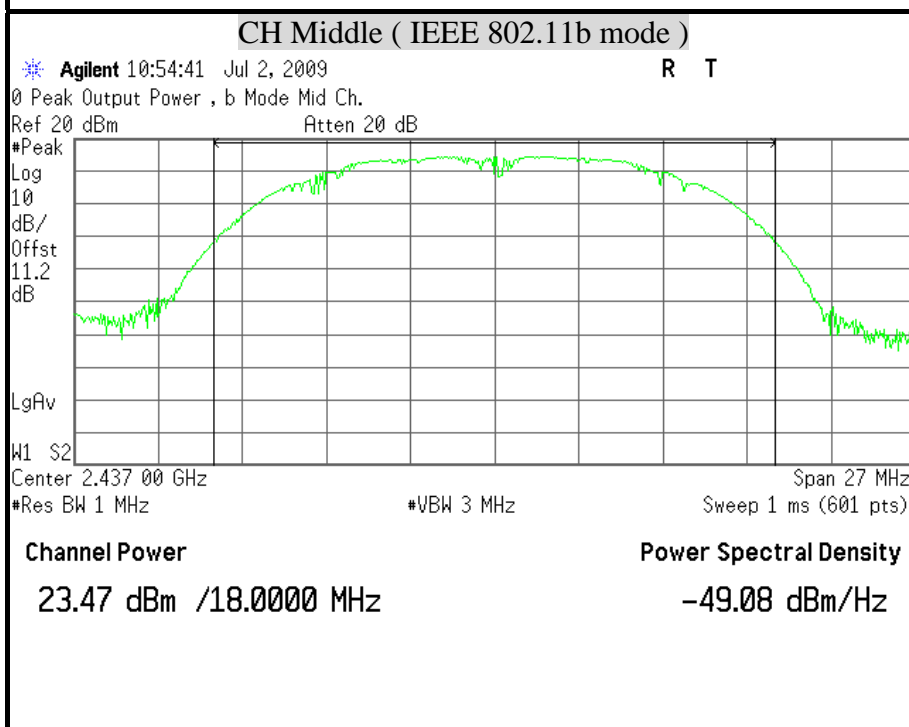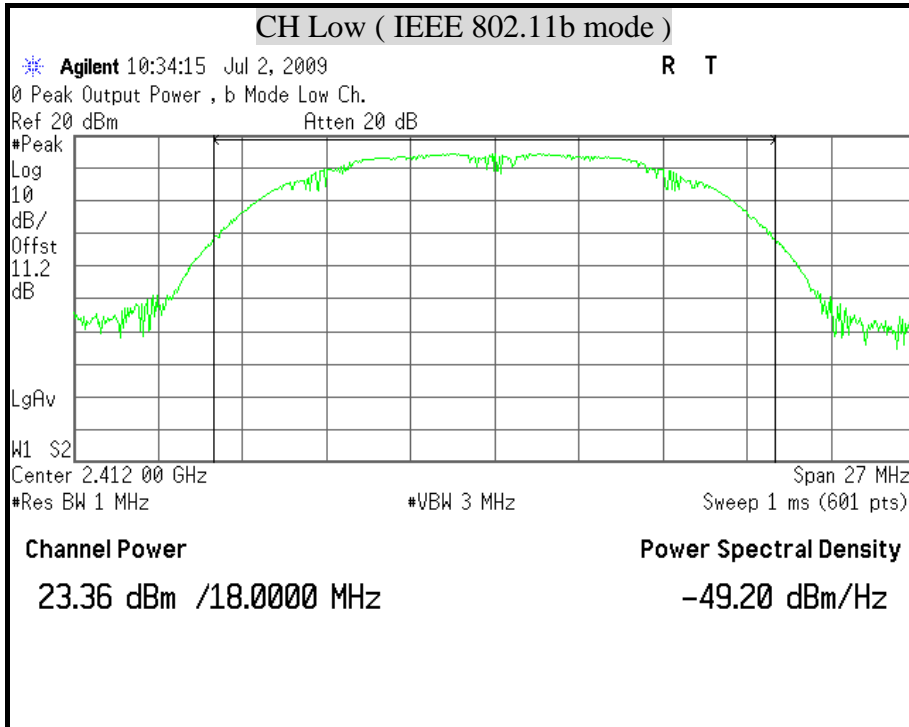


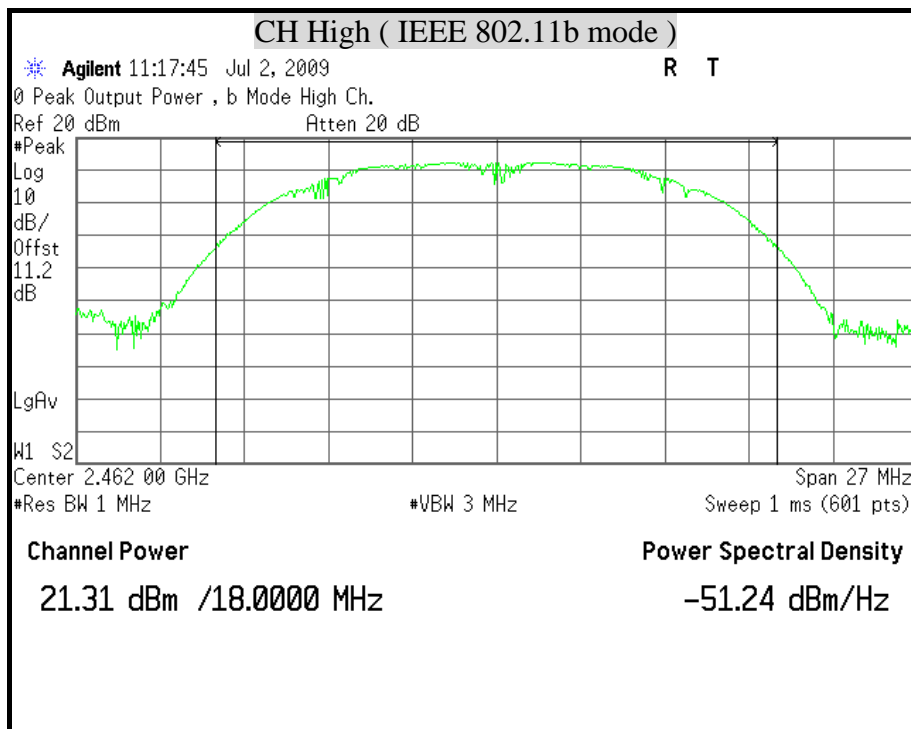





MAXIMUM PEAK OUTPUT POWER (IEEE 802.11g mode)

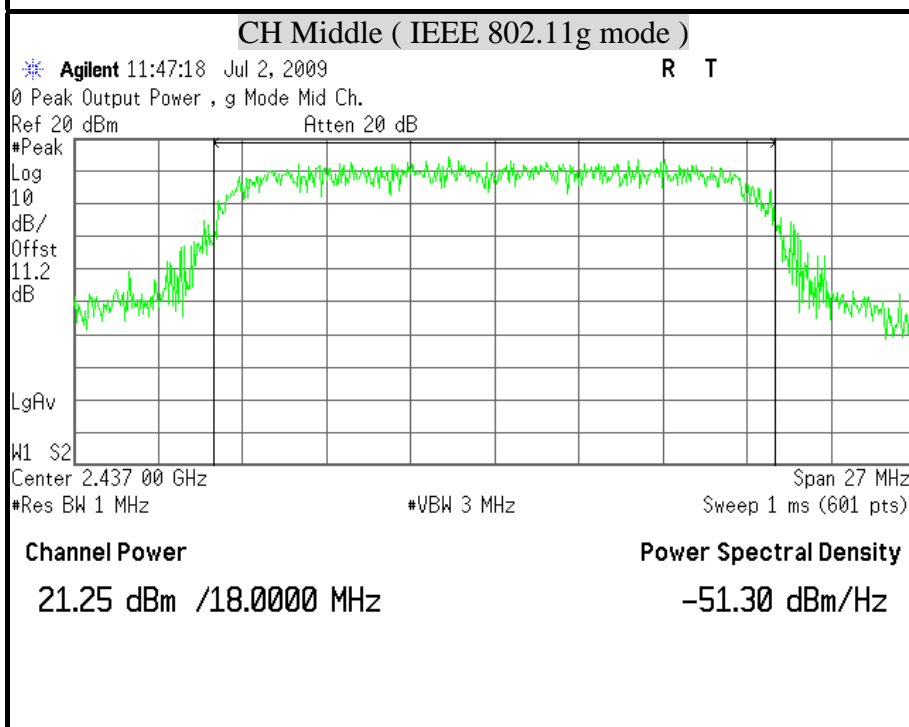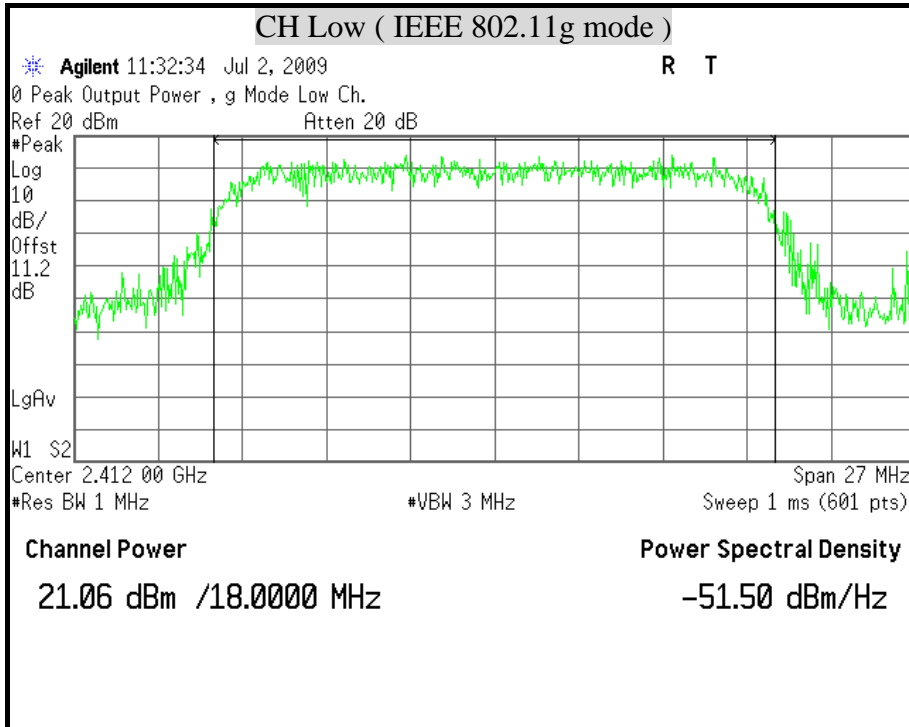



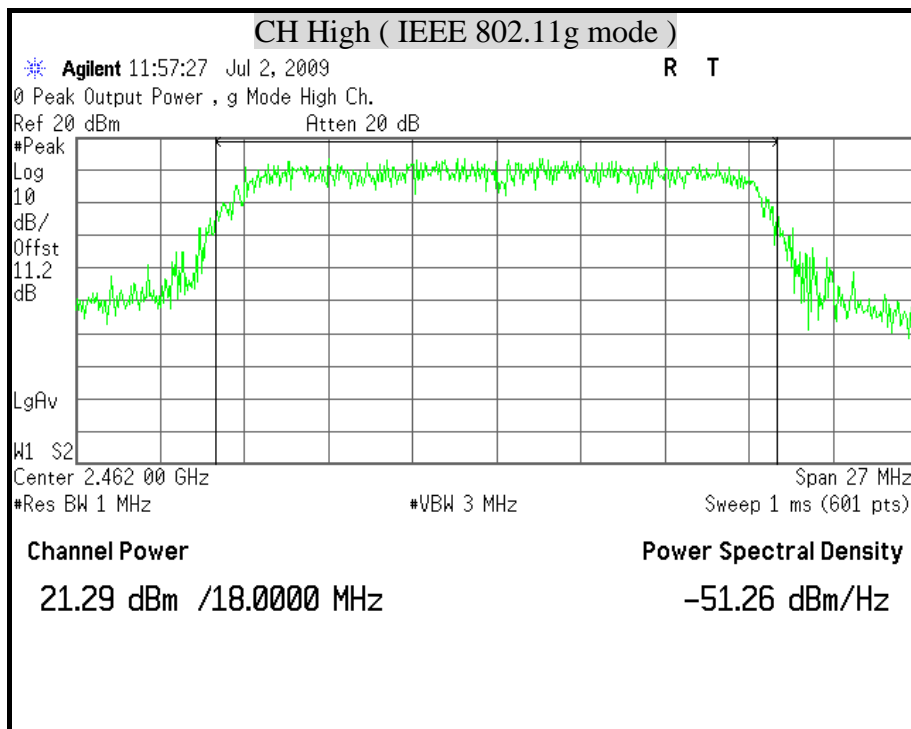





MAXIMUM PEAK OUTPUT POWER (IEEE 802.11n HT20 mode)

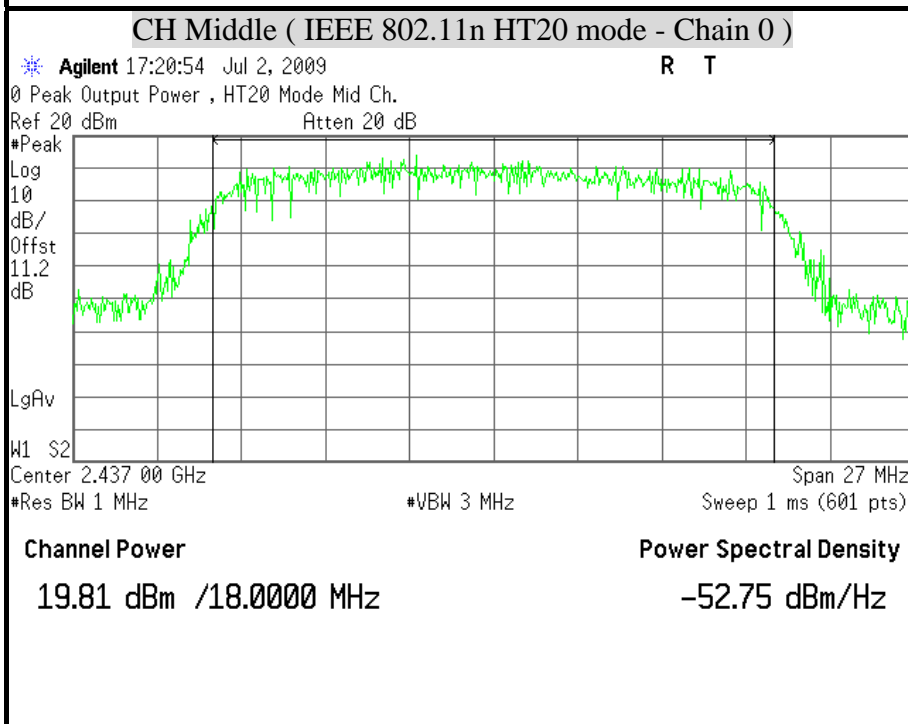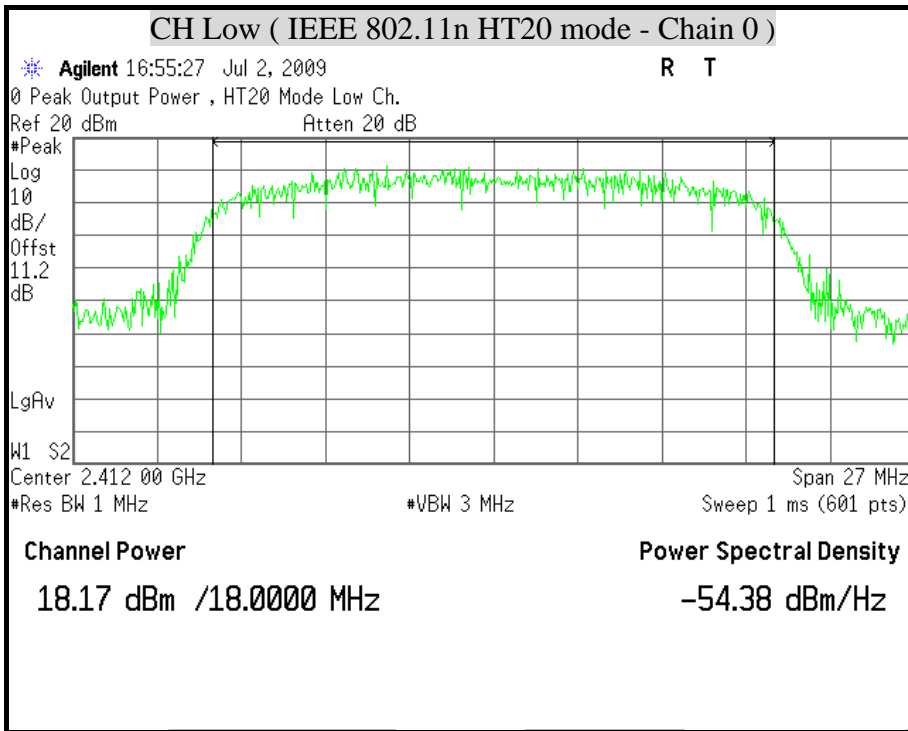


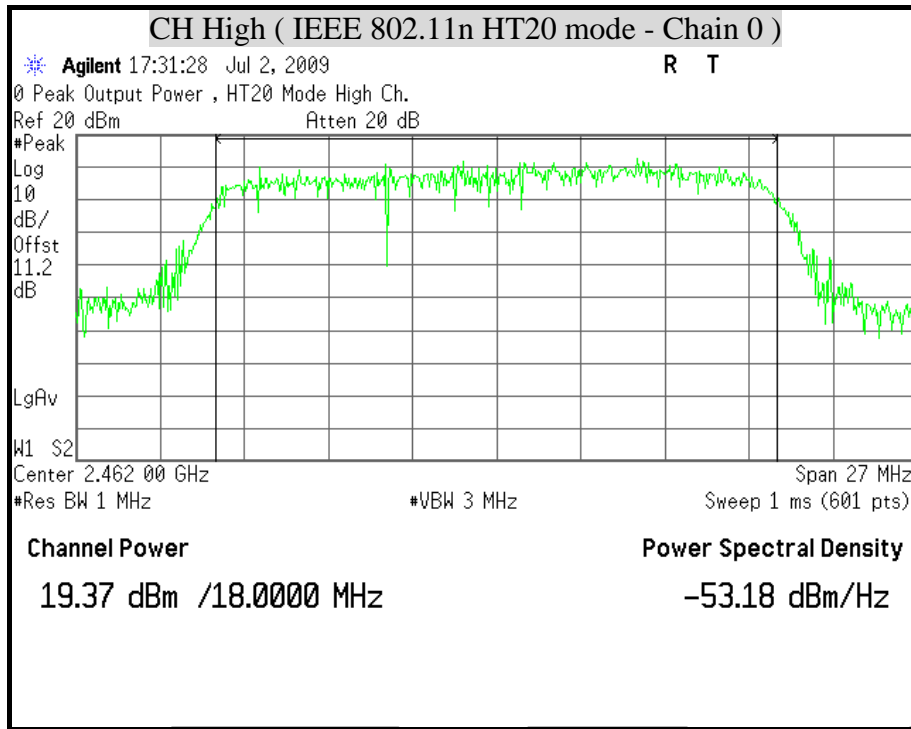


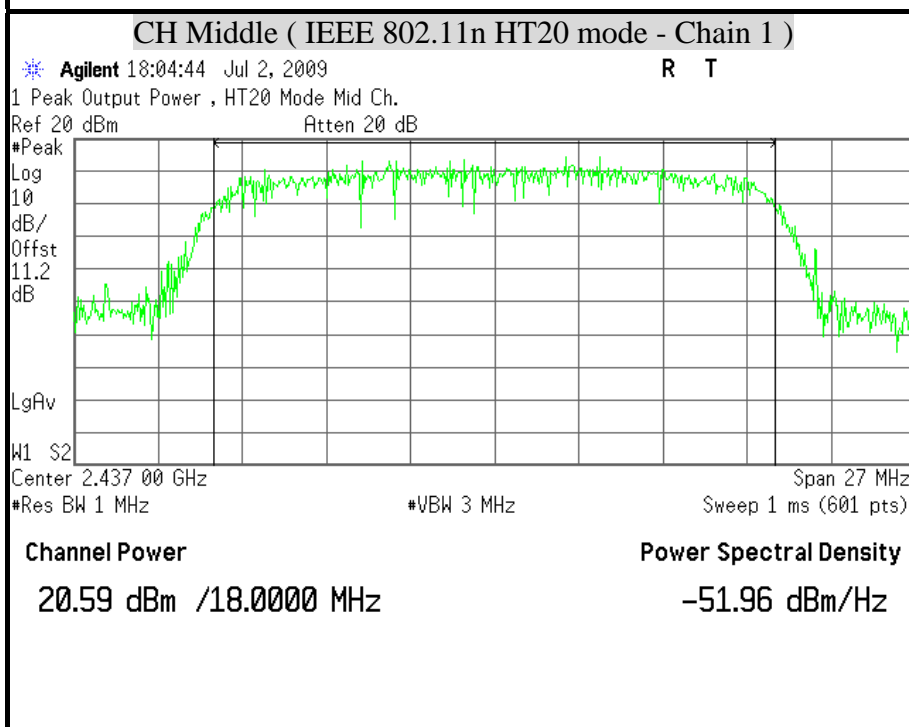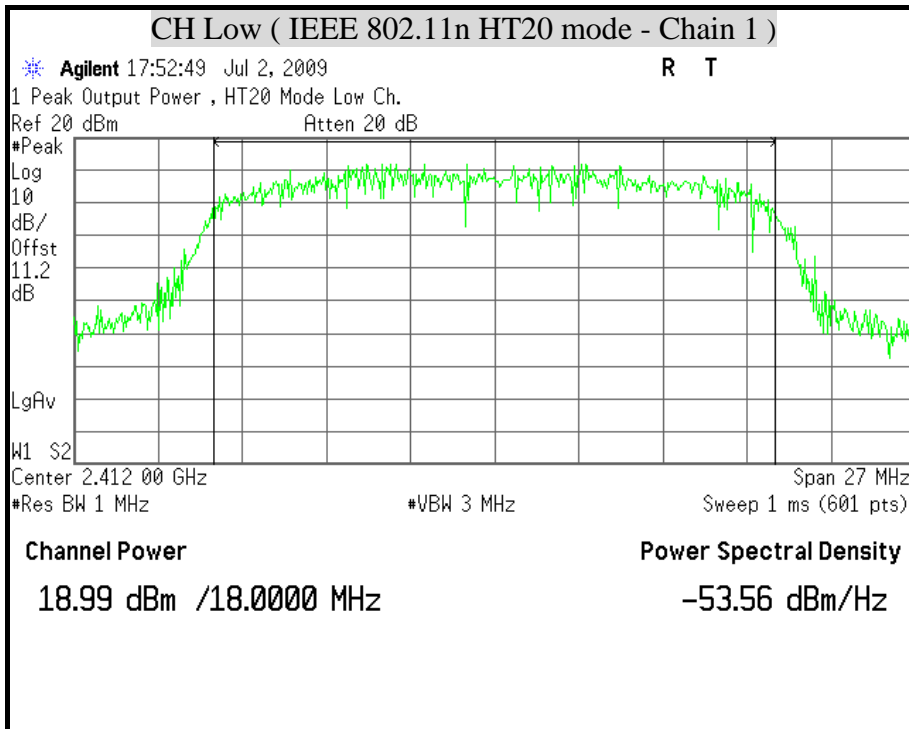



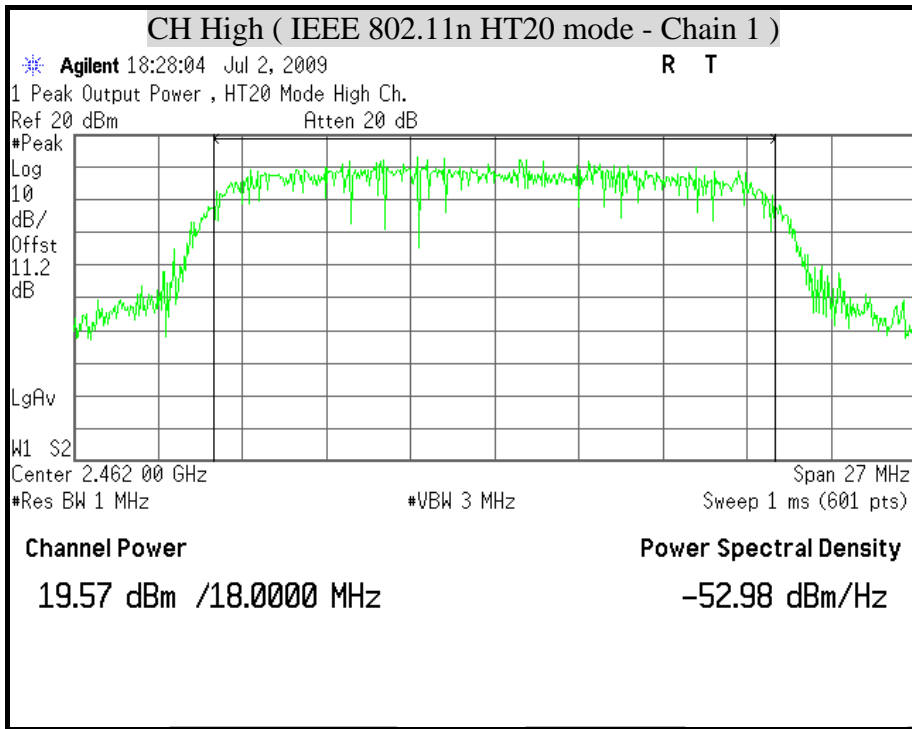





MAXIMUM PEAK OUTPUT POWER (IEEE 802.11n HT40 mode)

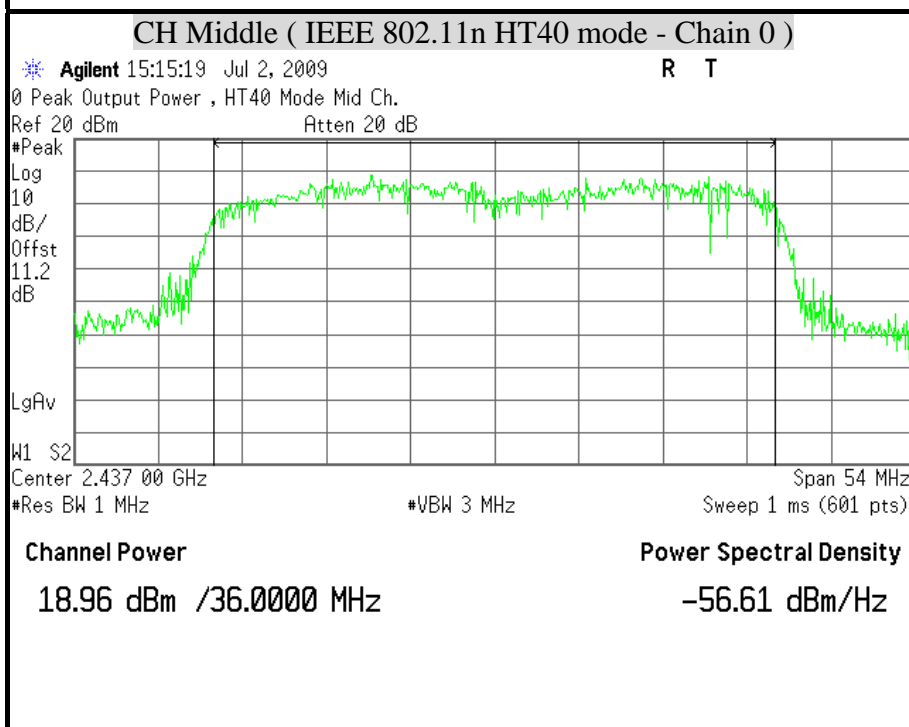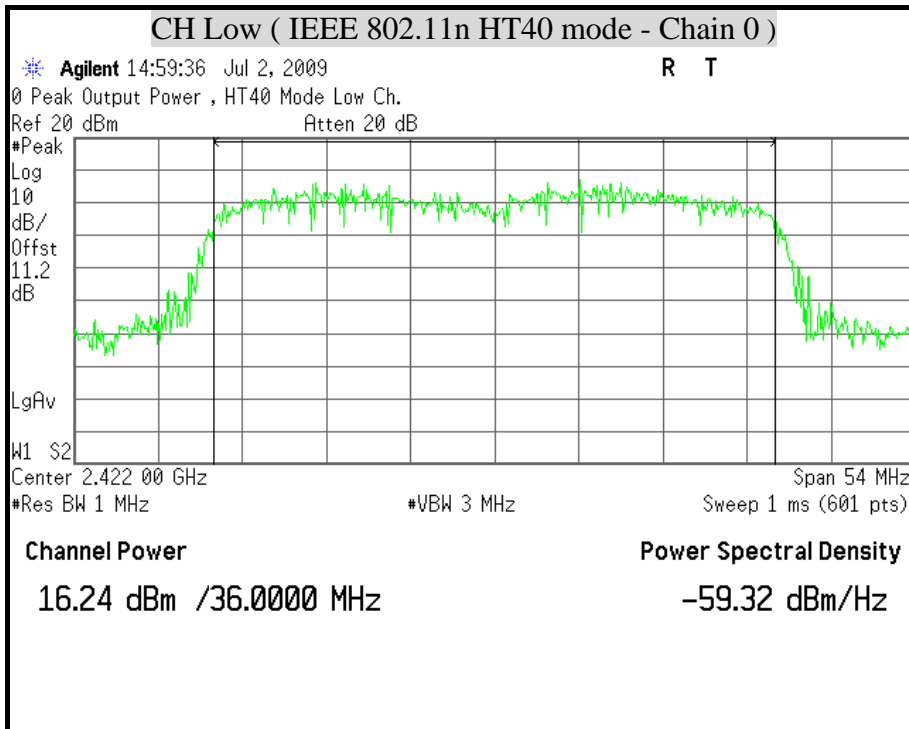

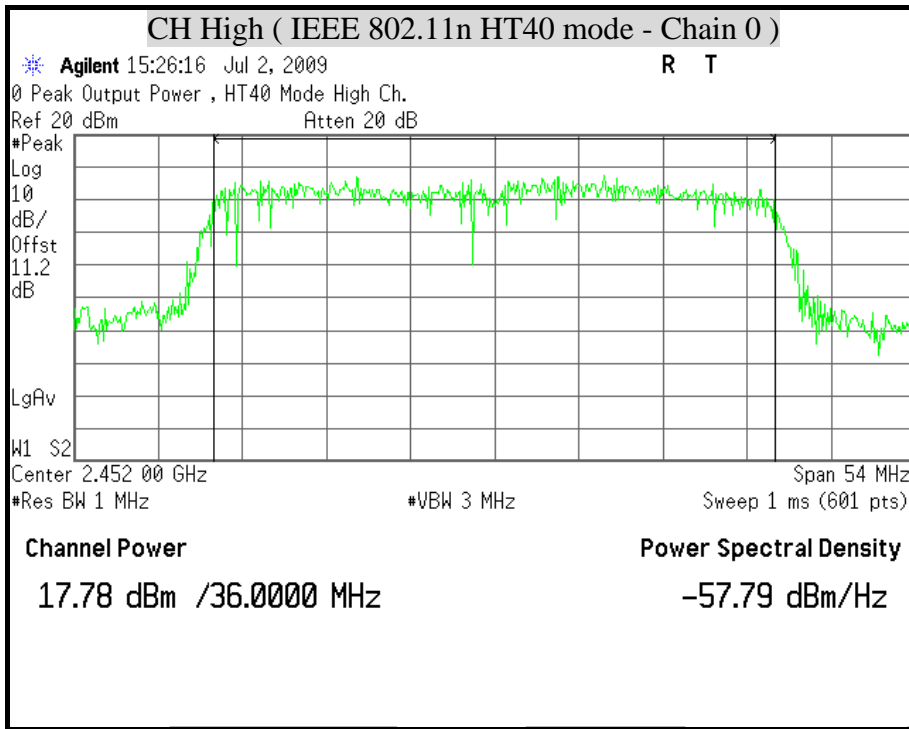

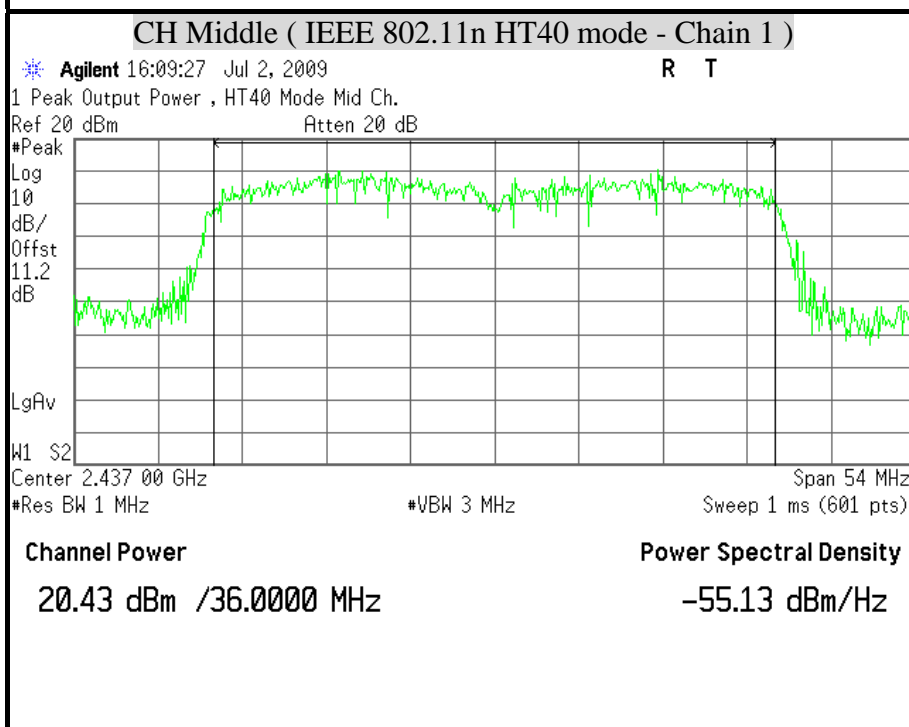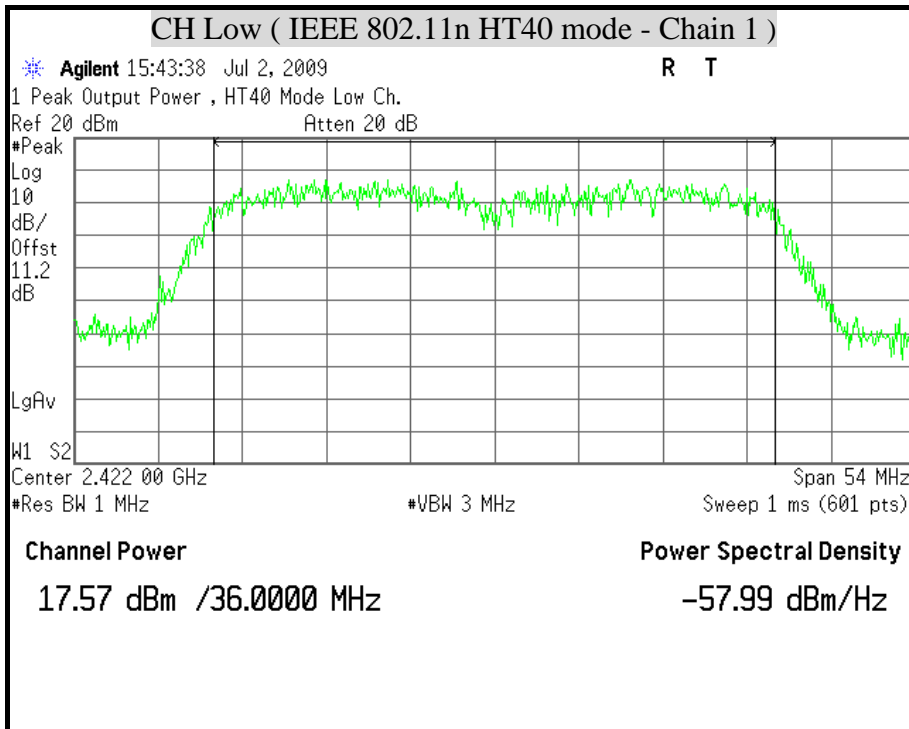

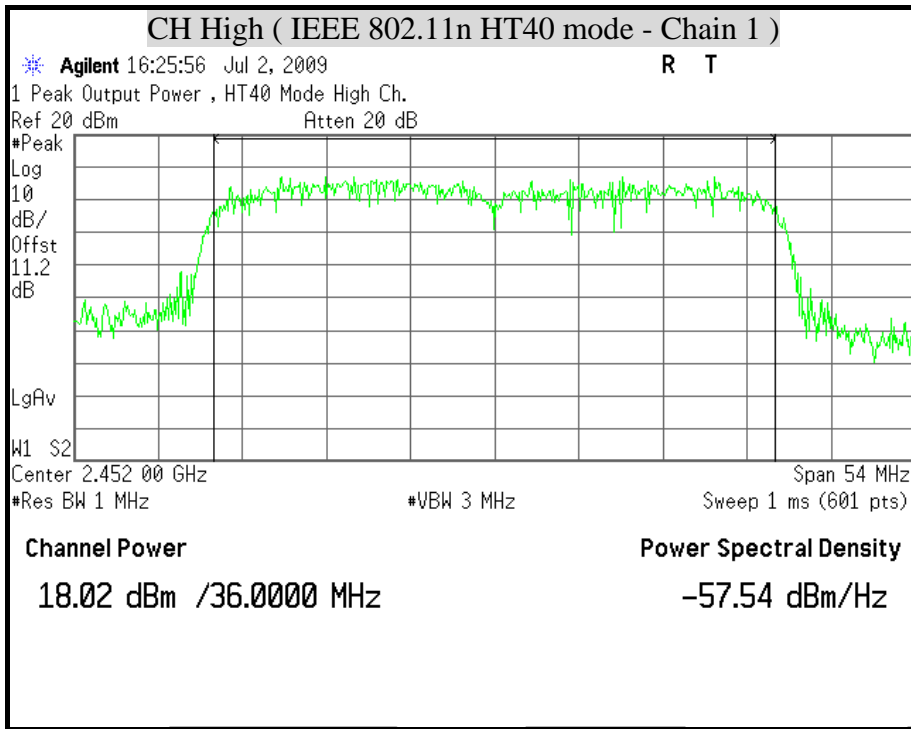



8.4 MAXIMUM PERMISSIBLE EXPOSURE

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

CALCULATIONS

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where $E =$ Field strength in Volts / meter

$P =$ Power in Watts

$G =$ Numeric antenna gain

$d =$ Distance in meters

$S =$ Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = d(m) / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

Where $d =$ Distance in cm

$P =$ Power in mW

$G =$ Numeric antenna gain

$S =$ Power density in mW / cm²

**LIMIT**Power Density Limit, $S=1.0\text{mW}/\text{cm}^2$ **TEST RESULTS**

Mode	Antenna Gain (dBi)	Minimum separation distance (cm)	Output Power (dBm)	Numeric antenna gain (dB)	Power Density Limit (mW/cm^2)	Power Density at 20cm (mW/cm^2)
IEEE 802.11b	1.8	20.0	23.47	1.51	1.00	0.066945
IEEE 802.11g	1.8	20.0	21.29	1.51	1.00	0.040525
IEEE 802.11n HT20	1.8	20.0	23.22	1.51	1.00	0.063200
IEEE 802.11n HT40	1.8	20.0	22.76	1.51	1.00	0.056849

Remark: For mobile or fixed location transmitters, the maximum power density is $1.0\text{ mW}/\text{cm}^2$ even if the calculation indicates that the power density would be larger.



8.5 AVERAGE POWER

LIMIT


None; for reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
SPECTRUM ANALYZER	AGILENT	E4446A	MY43360132	06/09/2010
SPECTRUM ANALYZER	AGILENT	E4446A	MY46180323	05/26/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

**TEST RESULTS**

Total avg power calculation formula:

$10 \log (10^{\text{Chain 0 Power} / 10} + 10^{\text{Chain 1 Power} / 10})$.

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Average Power Output (dBm)
Low	2412	20.58
Middle	2437	20.75
High	2462	18.61

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Average Power Output (dBm)
Low	2412	17.17
Middle	2437	17.80
High	2462	17.37

Remark:

1. At final test to get the worst-case emission at 54Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 mode (Two TX)**

Channel	Channel Frequency (MHz)	Average Power (dBm)		Average Power Total (dBm)
		Chain 0	Chain 1	
Low	2412	14.82	15.48	18.17
Middle	2437	16.29	17.32	19.84
High	2462	15.84	16.10	18.98

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode (Two TX)

Channel	Channel Frequency (MHz)	Average Power (dBm)		Average Power Total (dBm)
		Chain 0	Chain 1	
Low	2422	13.07	14.11	16.63
Middle	2437	15.54	16.57	19.09
High	2452	14.25	14.70	17.49

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



8.6 POWER SPECTRAL DENSITY

LIMIT


§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
SPECTRUM ANALYZER	AGILENT	E4446A	MY43360132	06/09/2010
SPECTRUM ANALYZER	AGILENT	E4446A	MY46180323	05/26/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

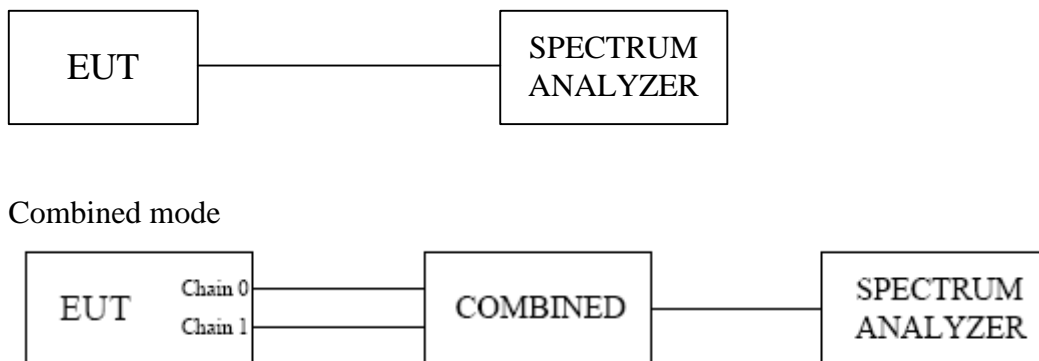

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 3KHz and VBW = RBW, set sweep time = span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

**TEST RESULTS**

Total peak power calculation formula:

$$10 \log (10^{\wedge} (\text{Chain 0 PPSD} / 10) + 10^{\wedge} (\text{Chain1 PPSD} / 10))$$

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maxmum Limit (dBm)	Pass / Fail
Low	2412	-8.40	8	PASS
Middle	2437	-8.60	8	PASS
High	2462	-10.27	8	PASS

Remark:

1. At finial test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maxmum Limit (dBm)	Pass / Fail
Low	2412	-8.84	8	PASS
Middle	2437	-8.93	8	PASS
High	2462	-8.71	8	PASS

Remark:

1. At finial test to get the worst-case emission at 54Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 mode (Two TX)**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PPSD Total (dBm)	Maximum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-13.04	-11.31	-9.07	8	PASS
Middle	2437	-10.48	-10.57	-7.51	8	PASS
High	2462	-11.95	-10.31	-8.04	8	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 Combined mode (Two TX)

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-7.81	8	PASS
Middle	2437	-4.89	8	PASS
High	2462	-4.64	8	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 14.7dB (including 10 dB pad and 4.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT40 mode (Two TX)**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PPSD Total (dBm)	Maximum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	-15.96	-14.97	-12.42	8	PASS
Middle	2437	-13.67	-12.97	-10.29	8	PASS
High	2452	-15.62	-14.70	-12.12	8	PASS

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 11.2dB (including 10 dB pad and 1.2 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 Combined mode (Two TX)



Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2422	-10.76	8	PASS
Middle	2437	-8.02	8	PASS
High	2452	-9.81	8	PASS


Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 14.7dB (including 10 dB pad and 4.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.





POWER SPECTRAL DENSITY (IEEE 802.11b mode)

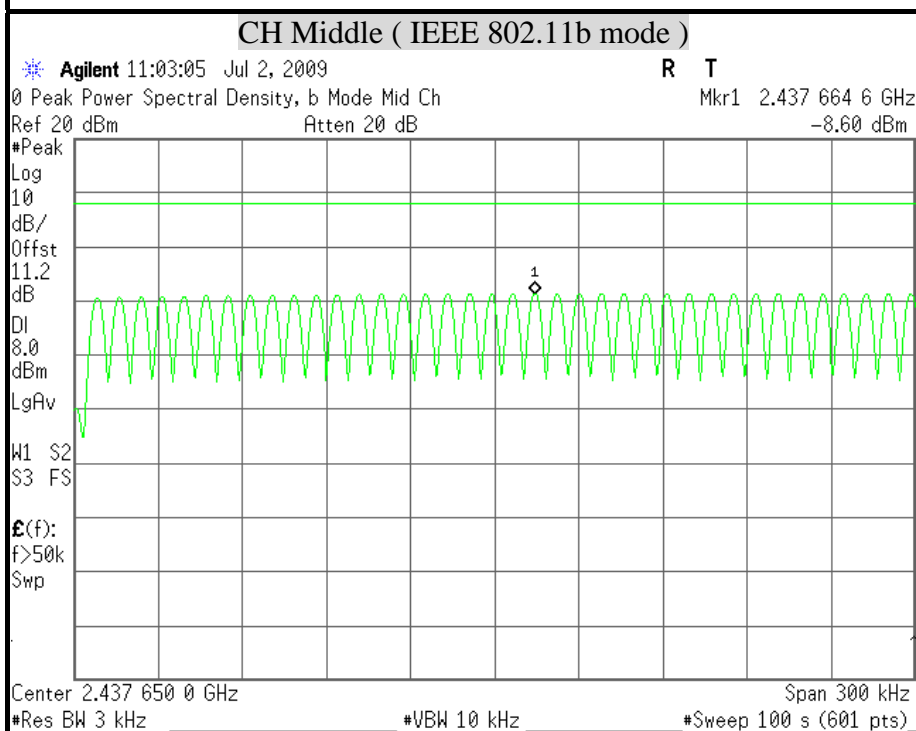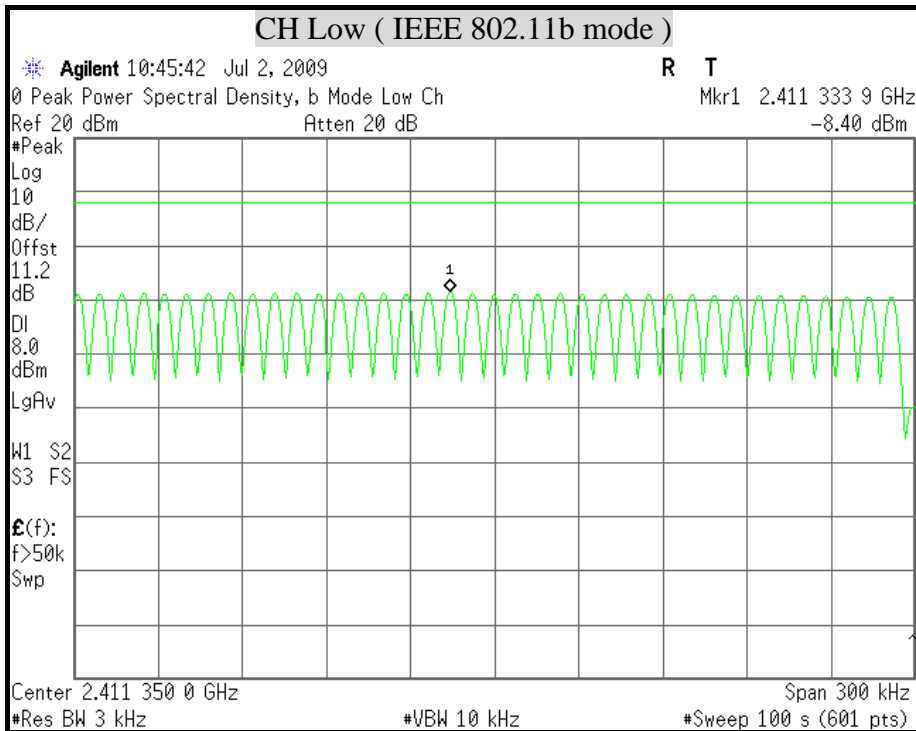


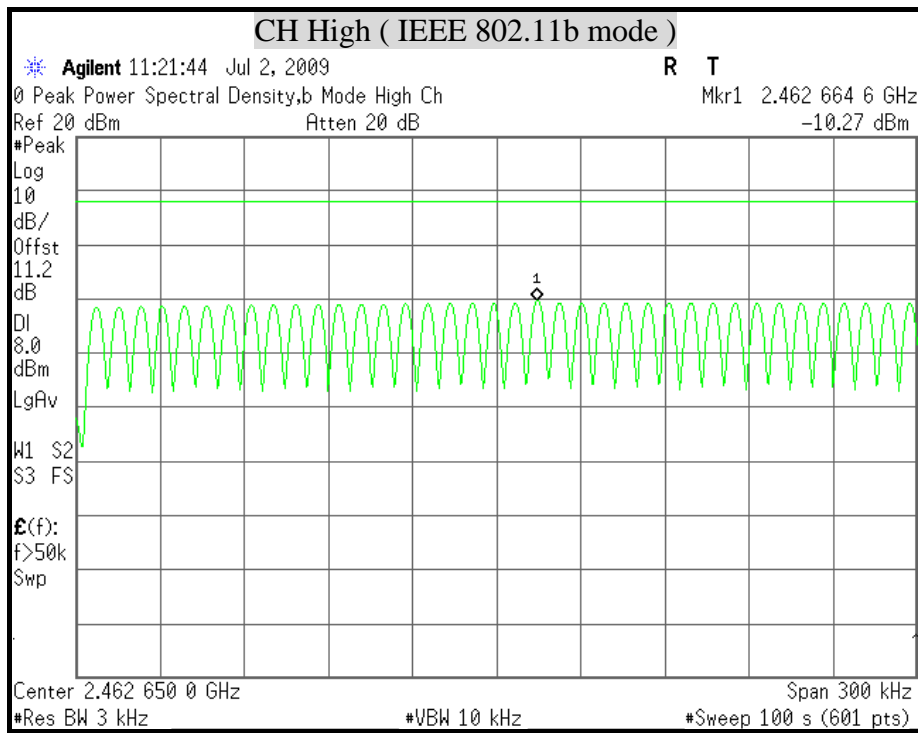





POWER SPECTRAL DENSITY (IEEE 802.11g mode)

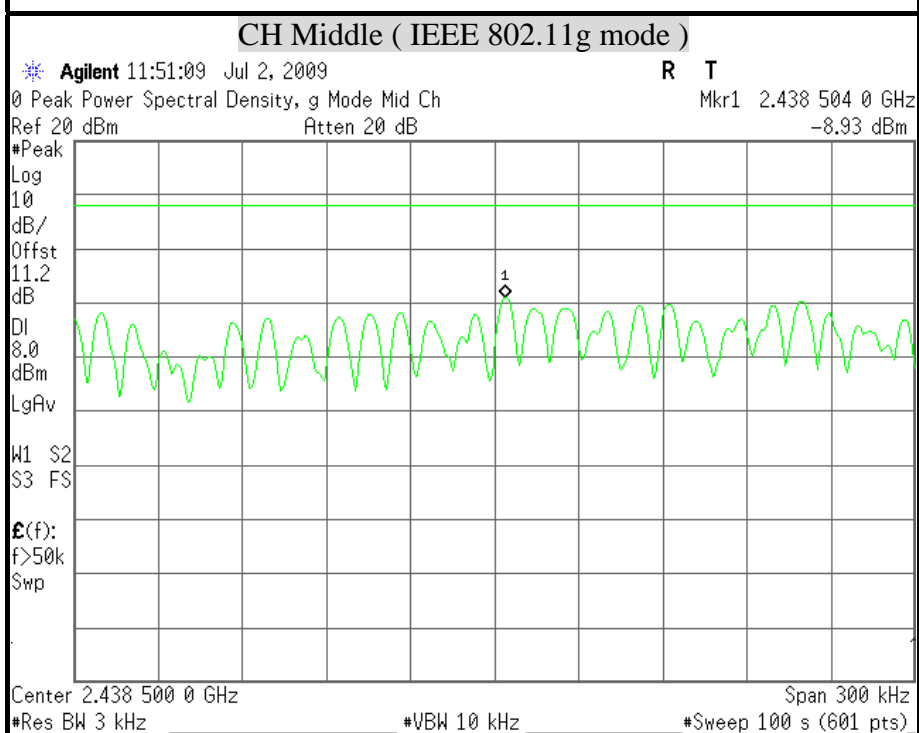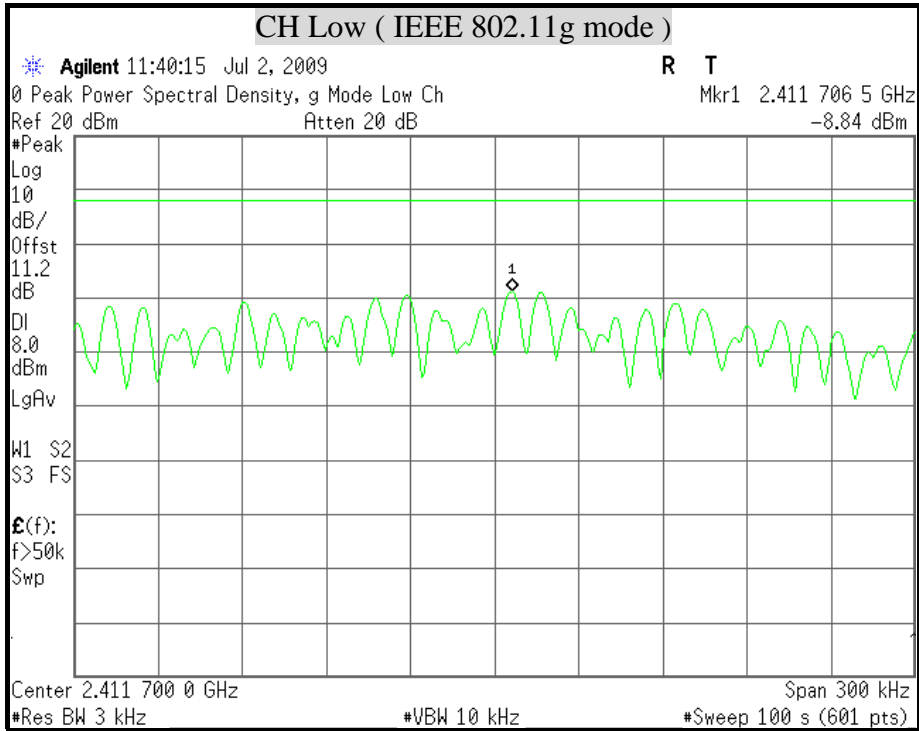



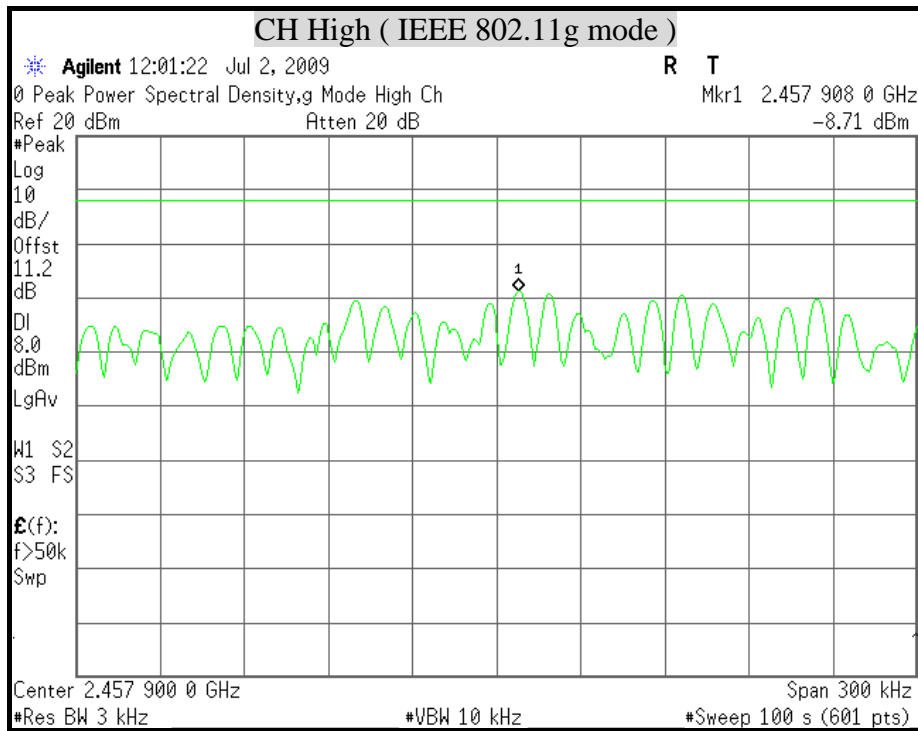





POWER SPECTRAL DENSITY (IEEE 802.11n HT20 mode)

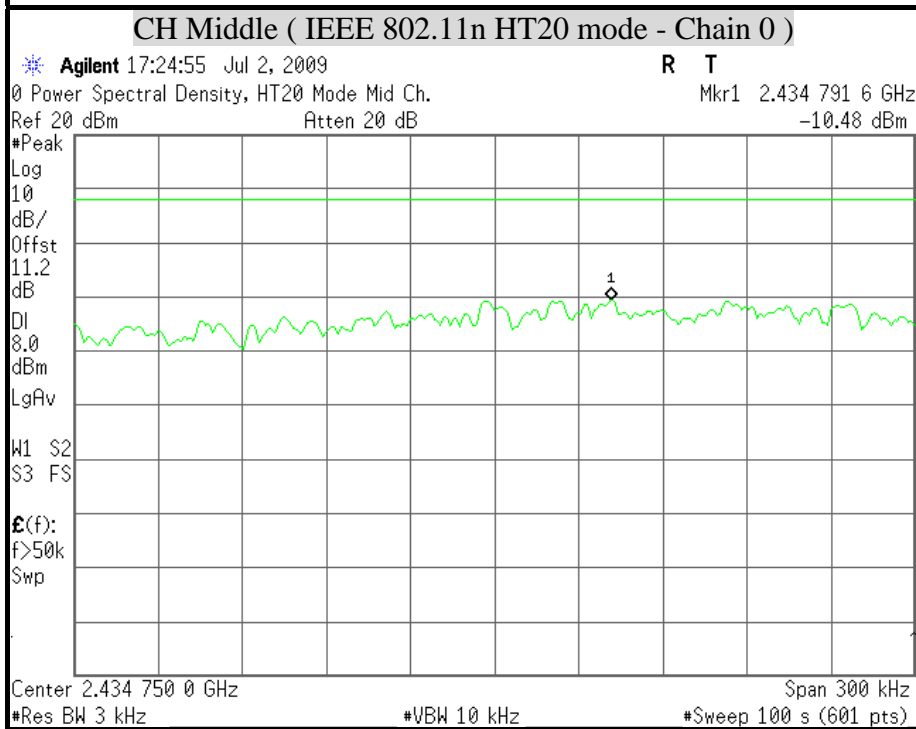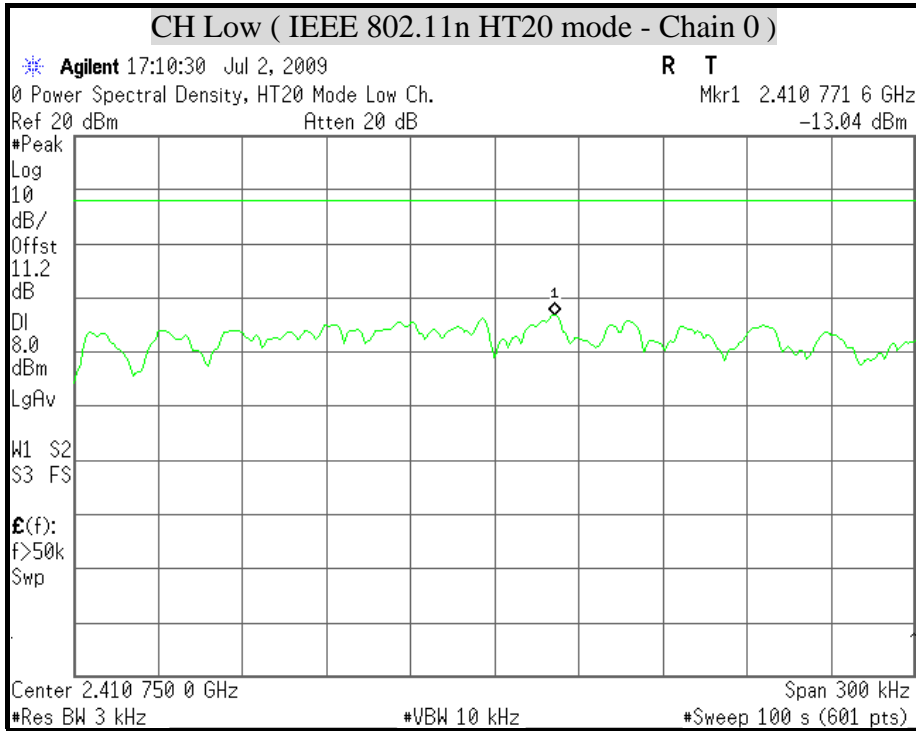


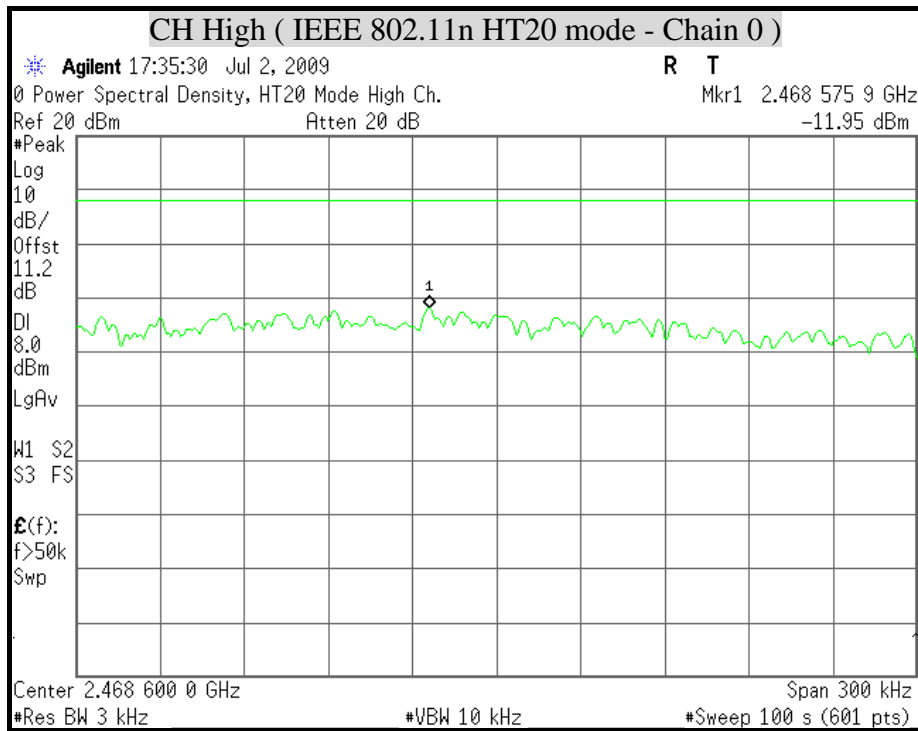


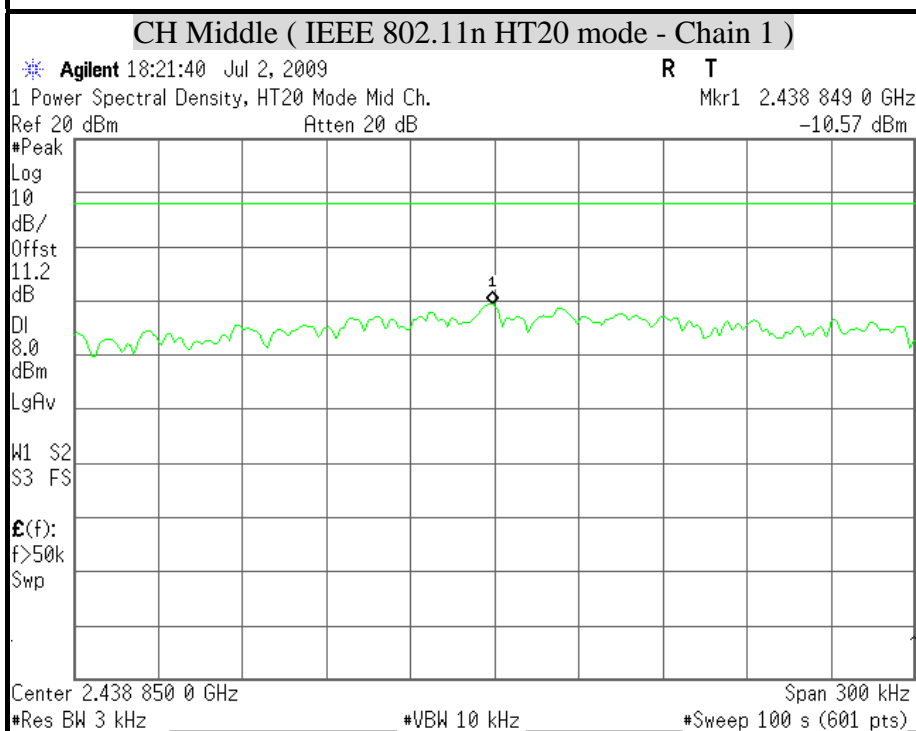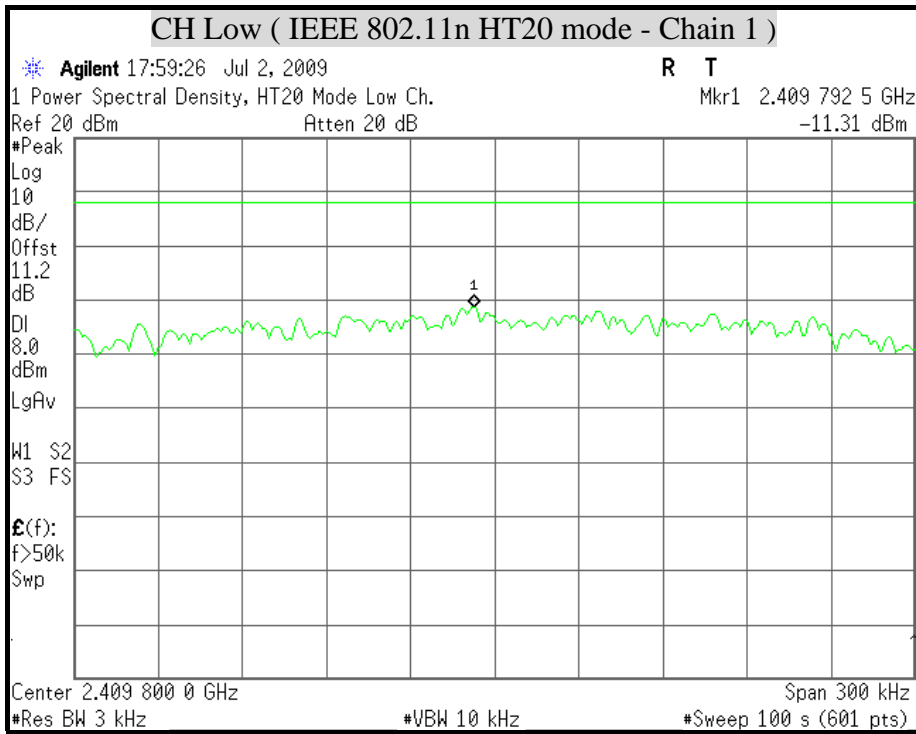


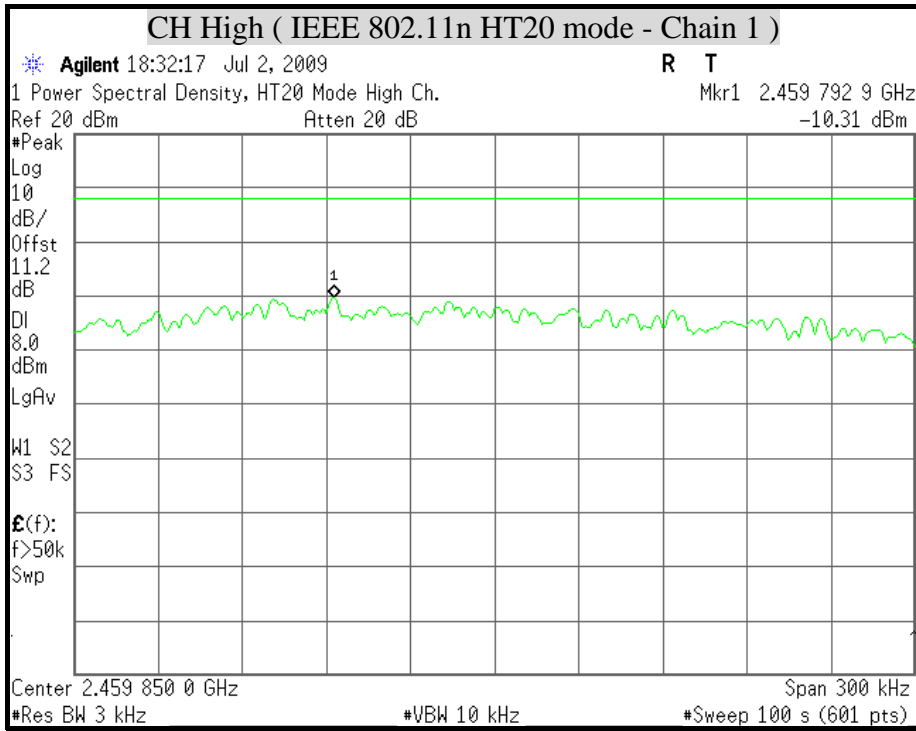





POWER SPECTRAL DENSITY (IEEE 802.11n HT20 Combined mode)

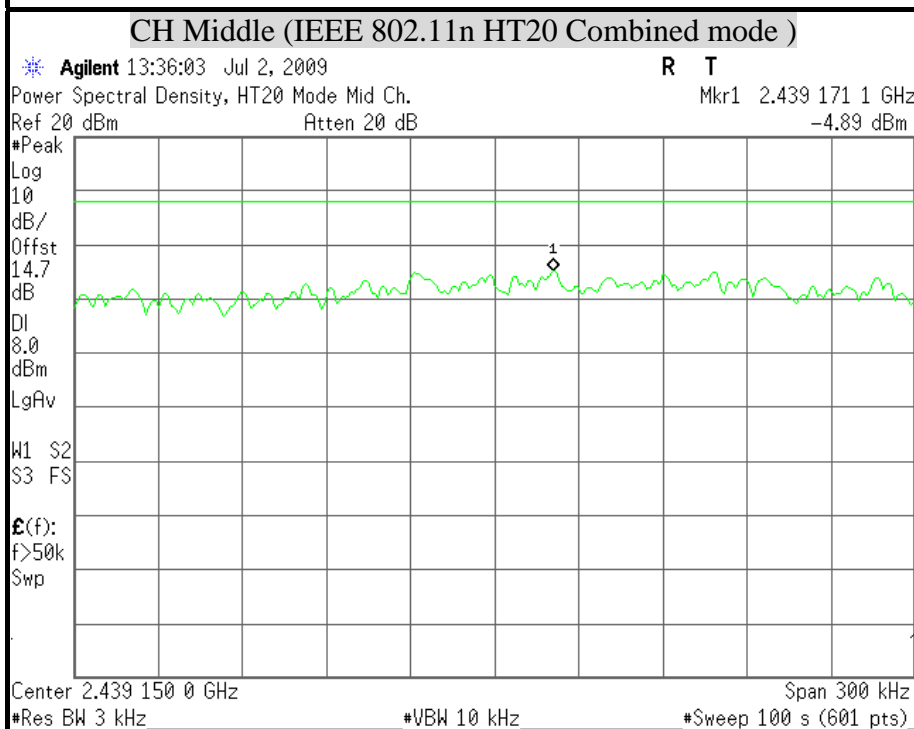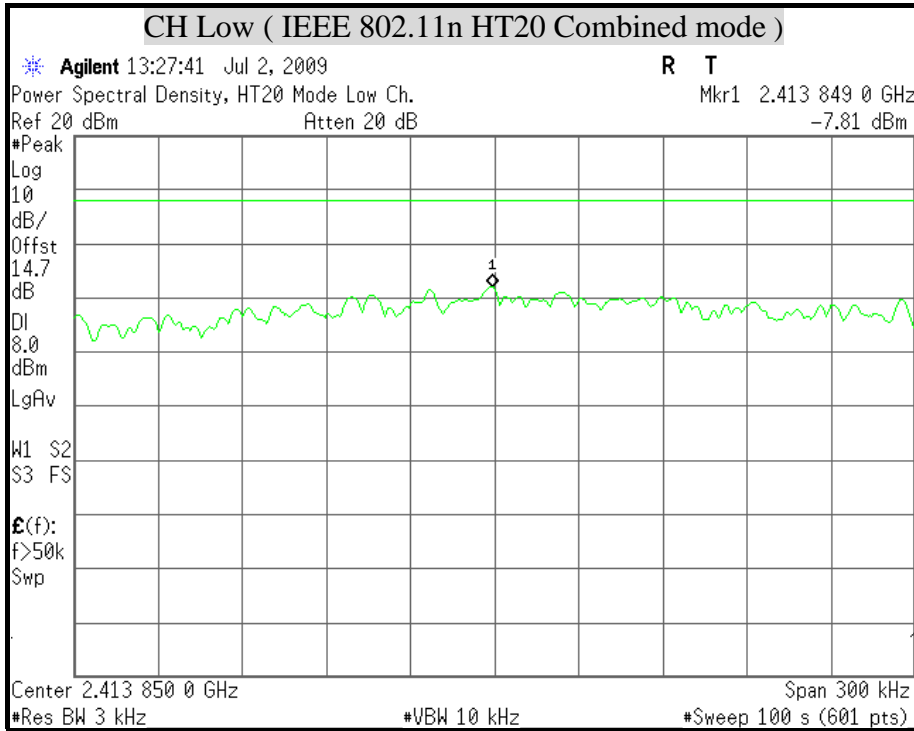



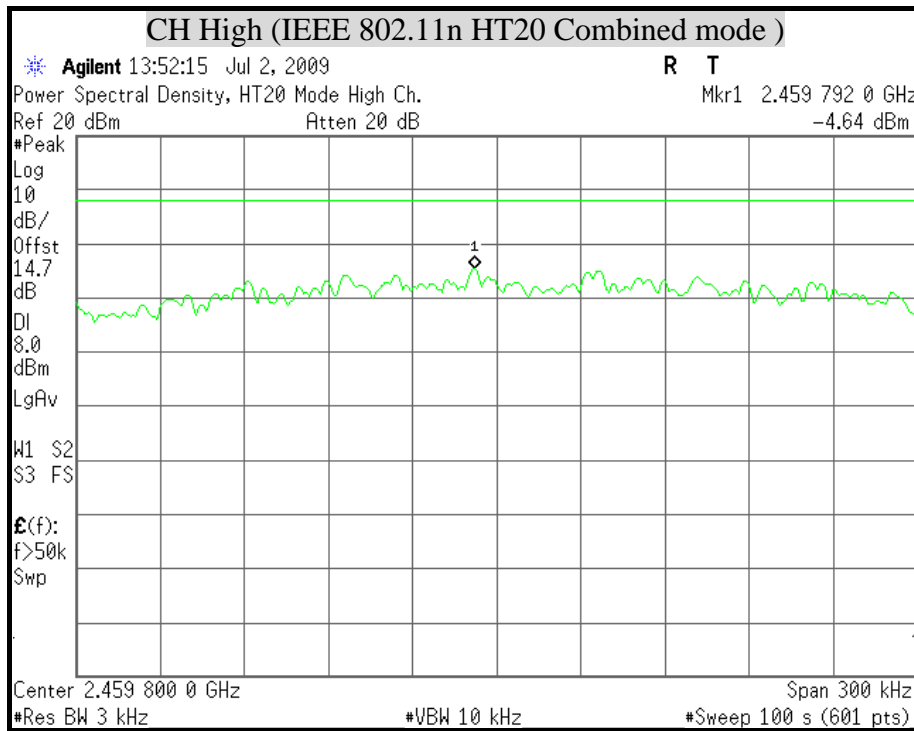





POWER SPECTRAL DENSITY (IEEE 802.11n HT40 mode)

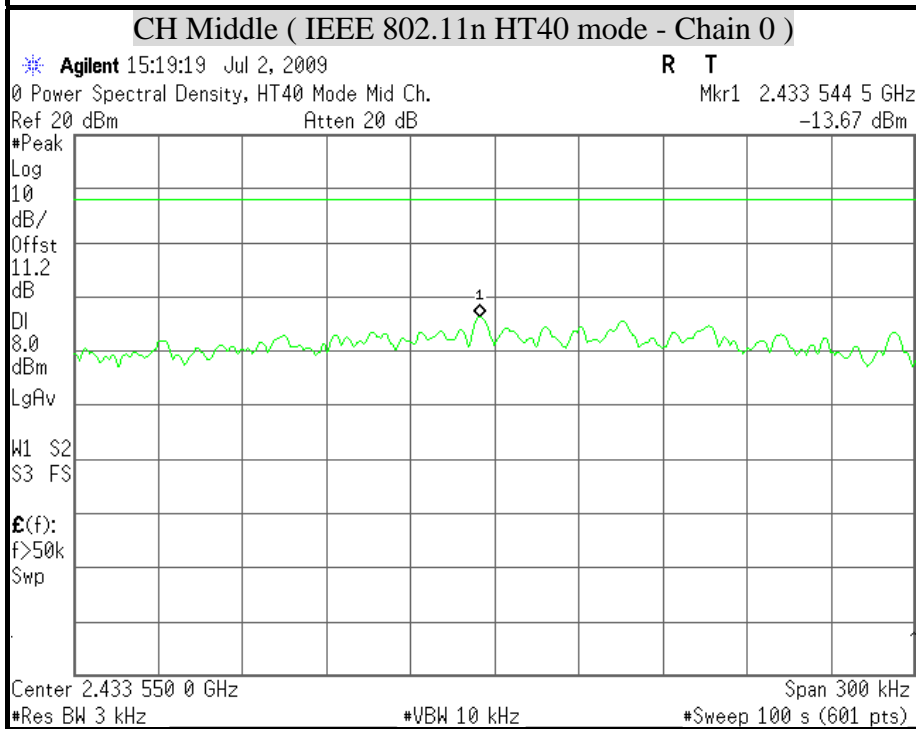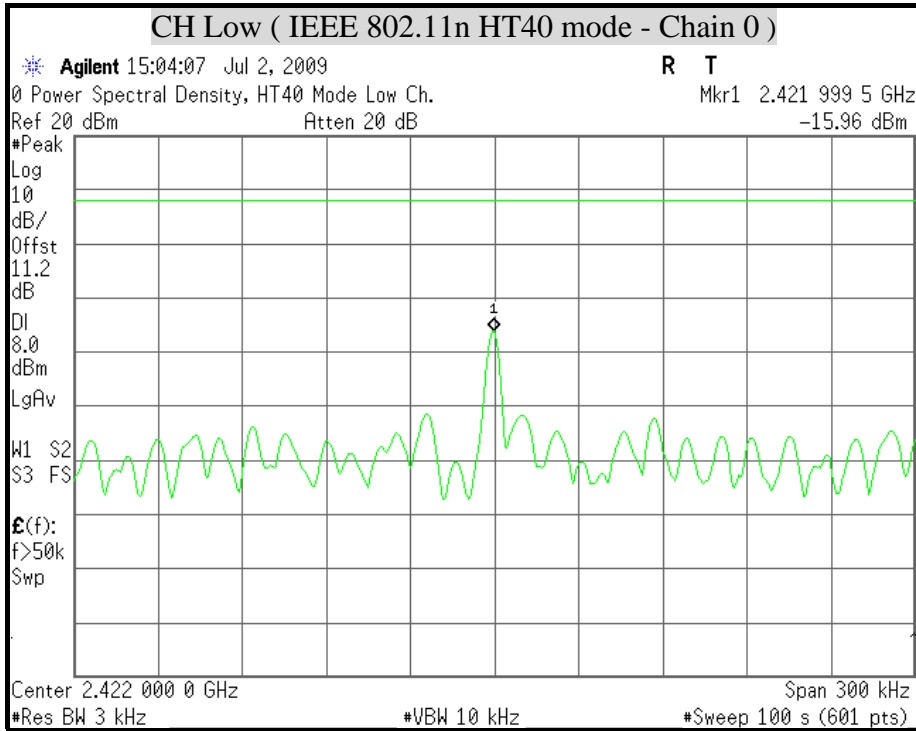


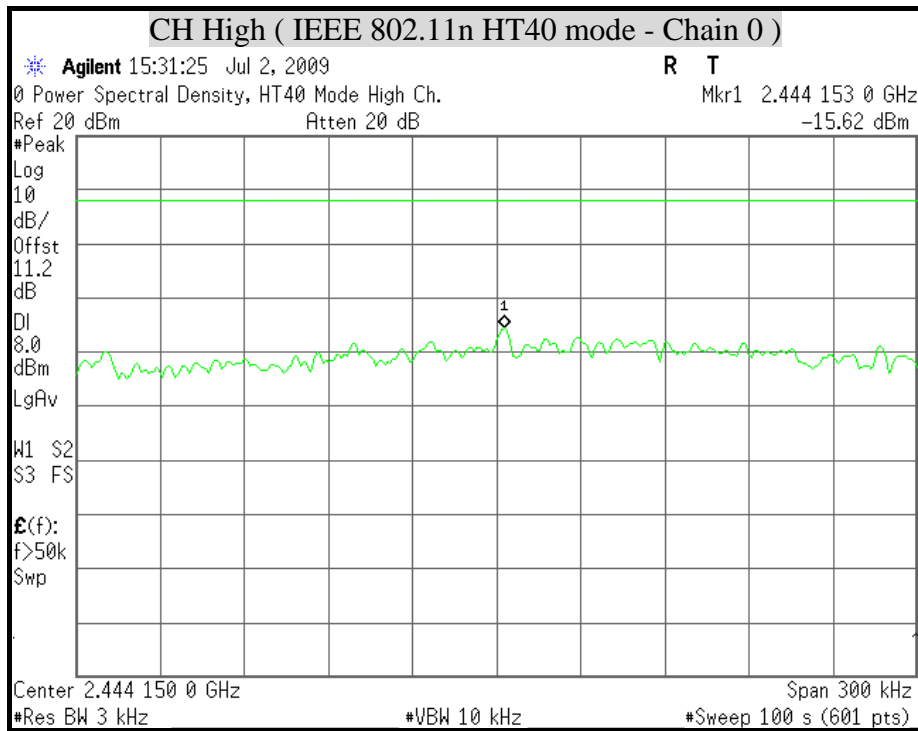


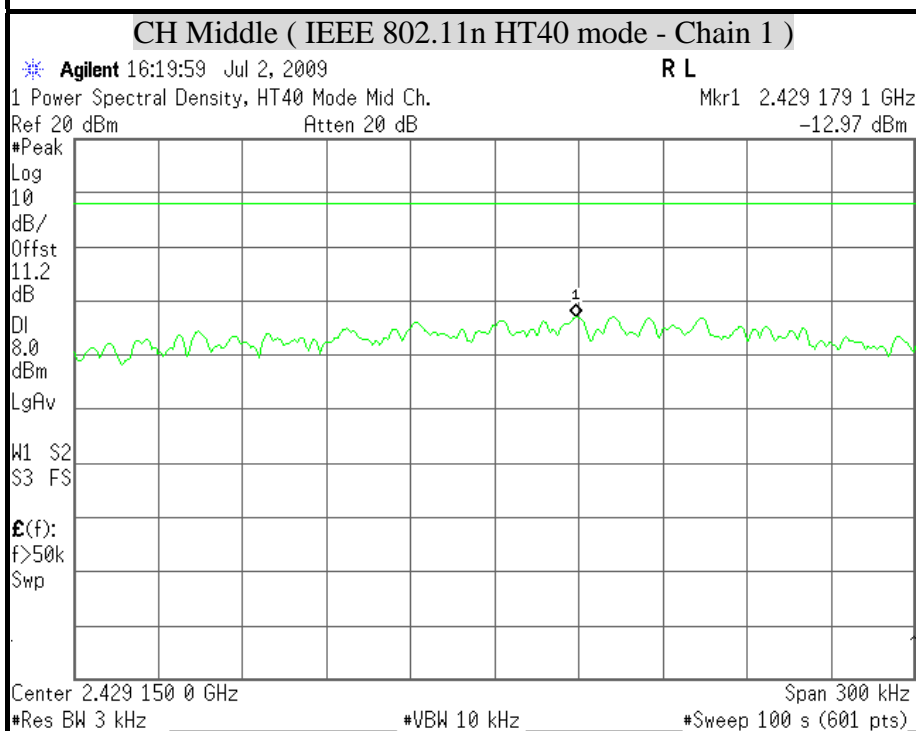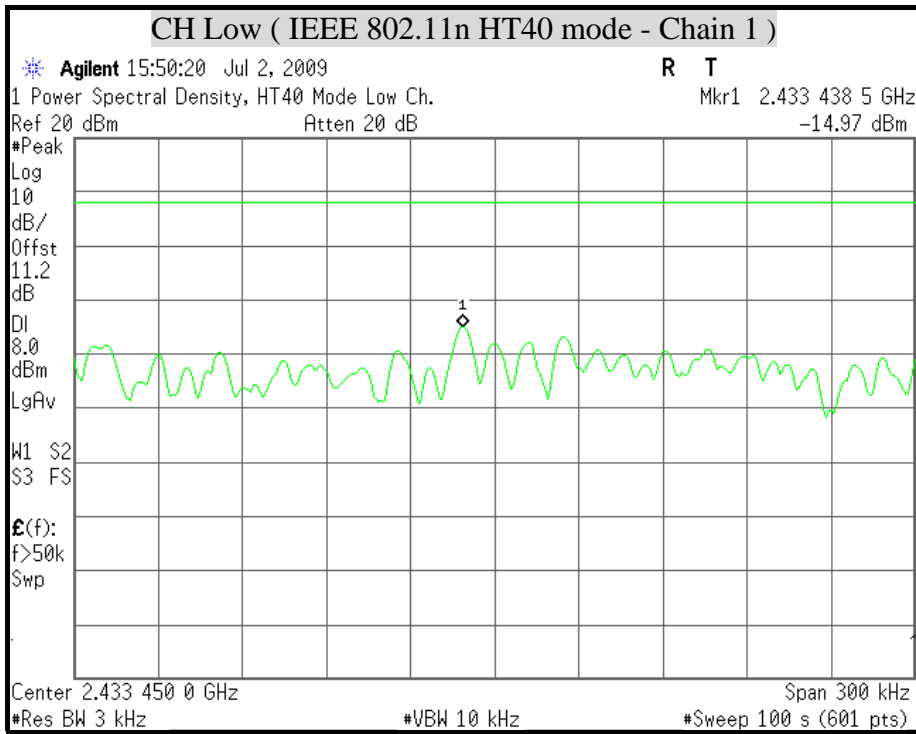


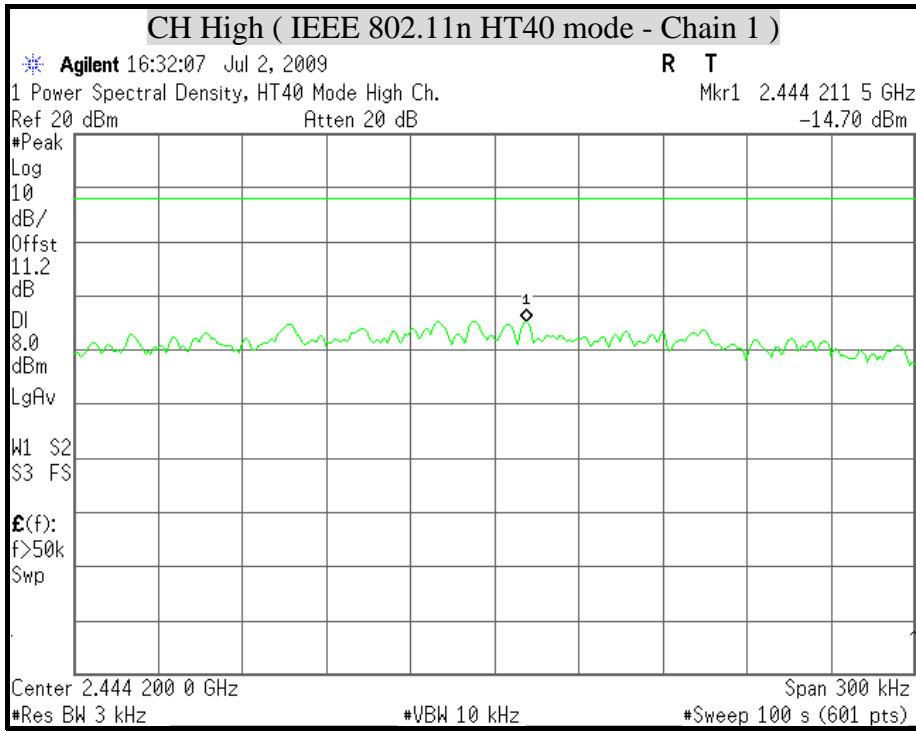



POWER SPECTRAL DENSITY (IEEE 802.11n HT40 Combined mode)

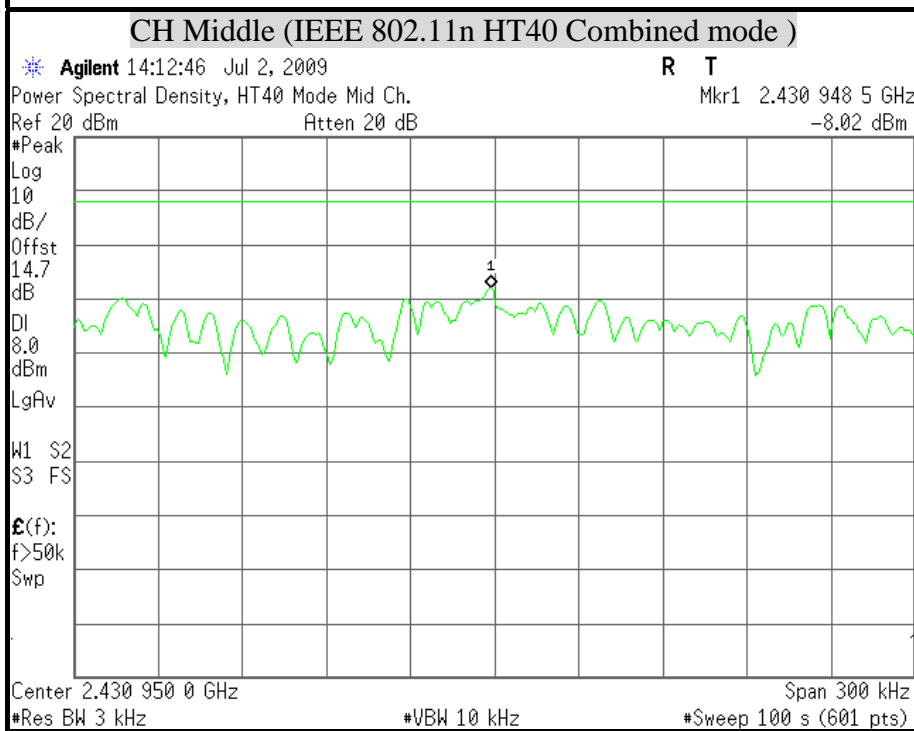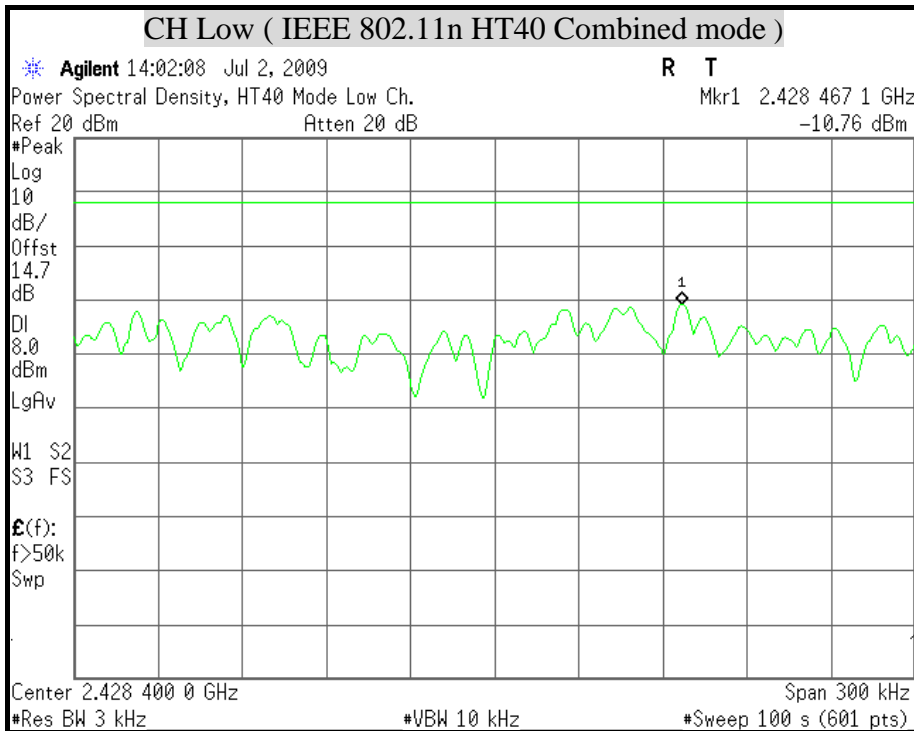

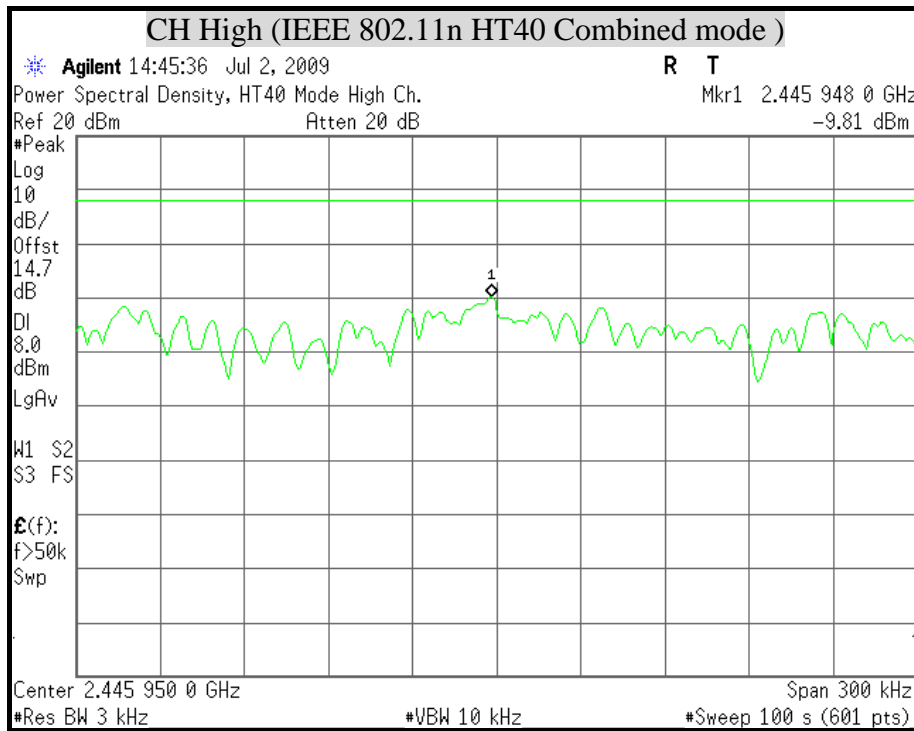



8.7 CONDUCTED SPURIOUS EMISSION

LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
SPECTRUM ANALYZER	AGILENT	E4446A	MY43360132	06/09/2010
SPECTRUM ANALYZER	AGILENT	E4446A	MY46180323	05/26/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

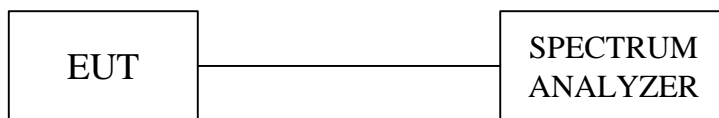

Combined mode



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.




TEST RESULTS

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT



(IEEE 802.11b mode)

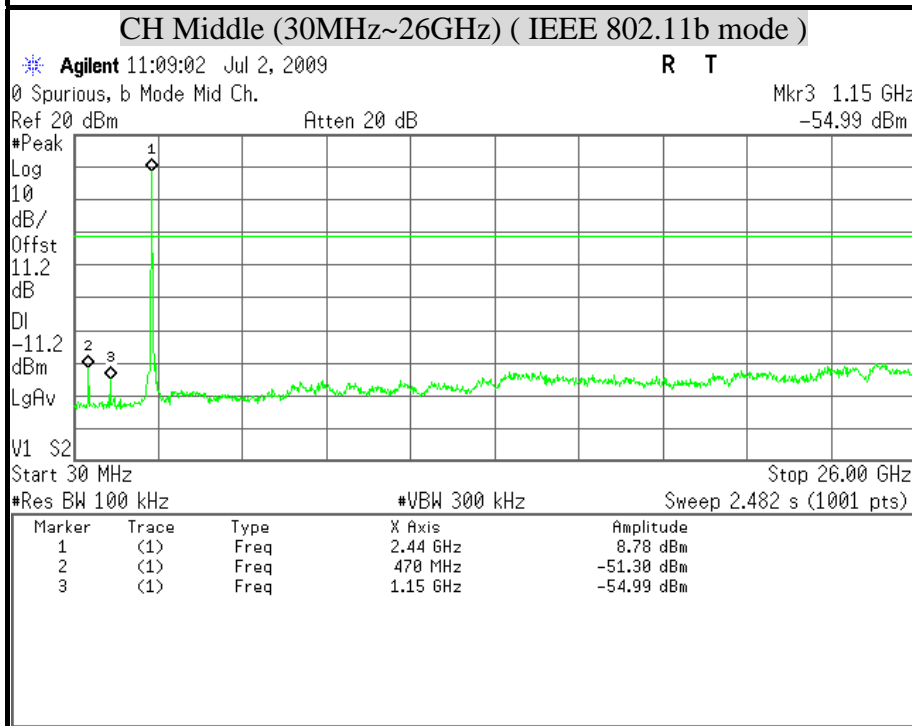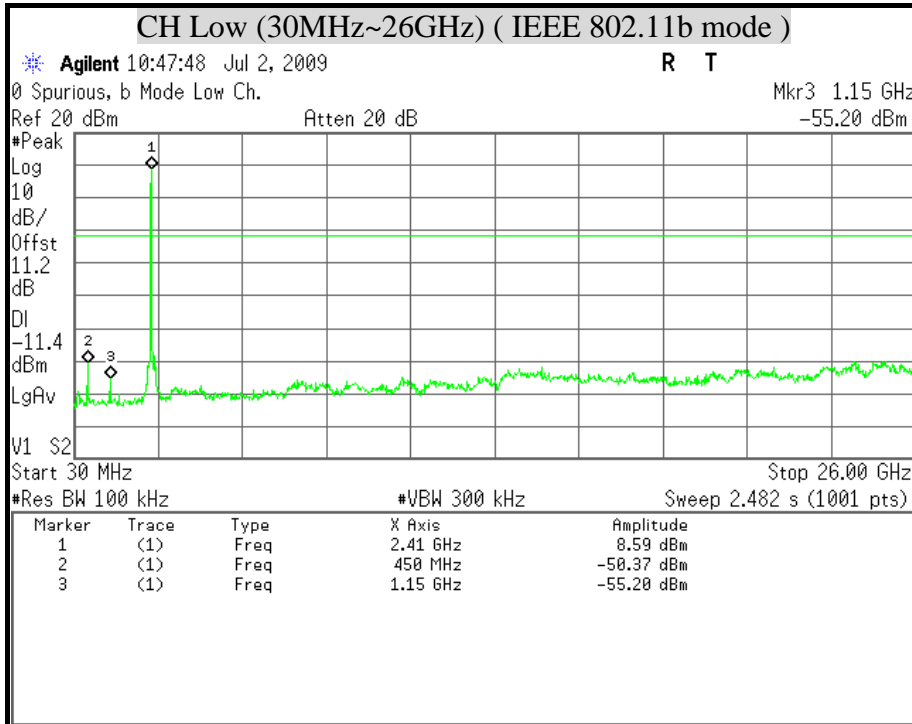


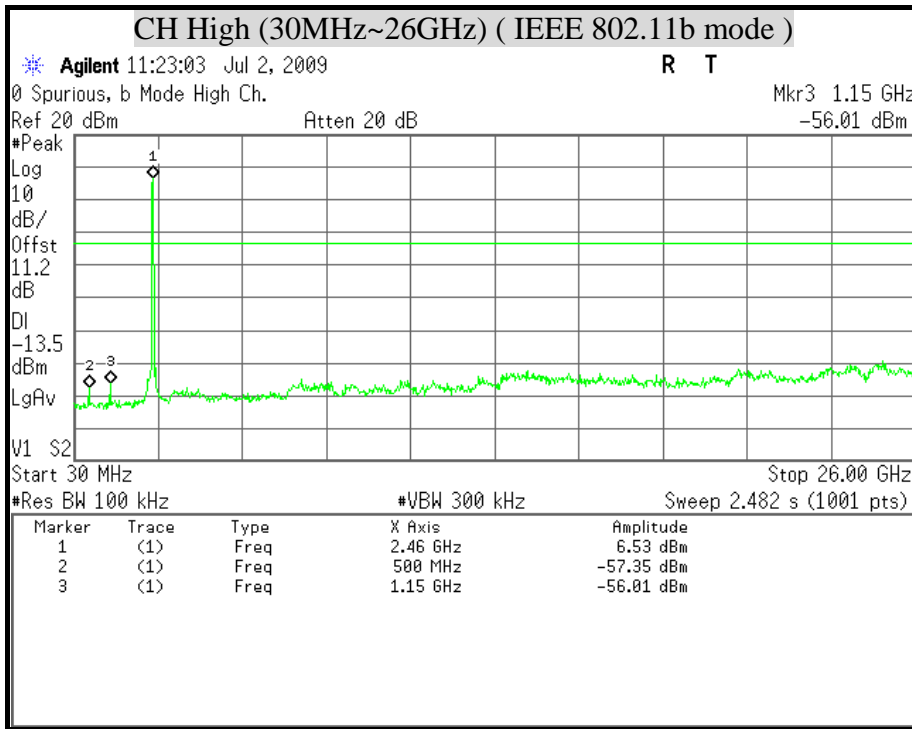





OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (IEEE 802.11g mode)

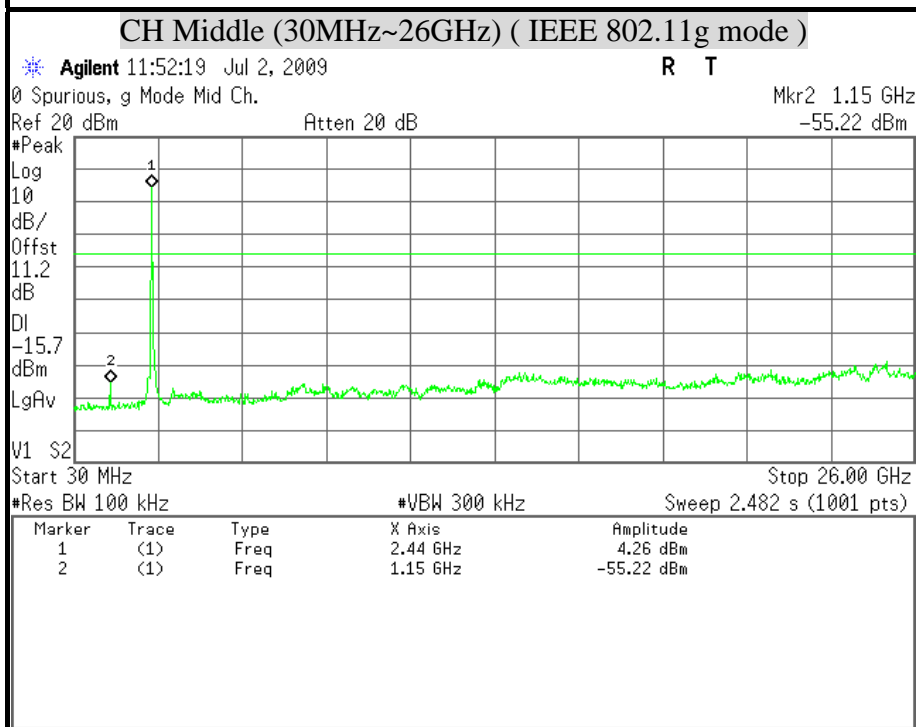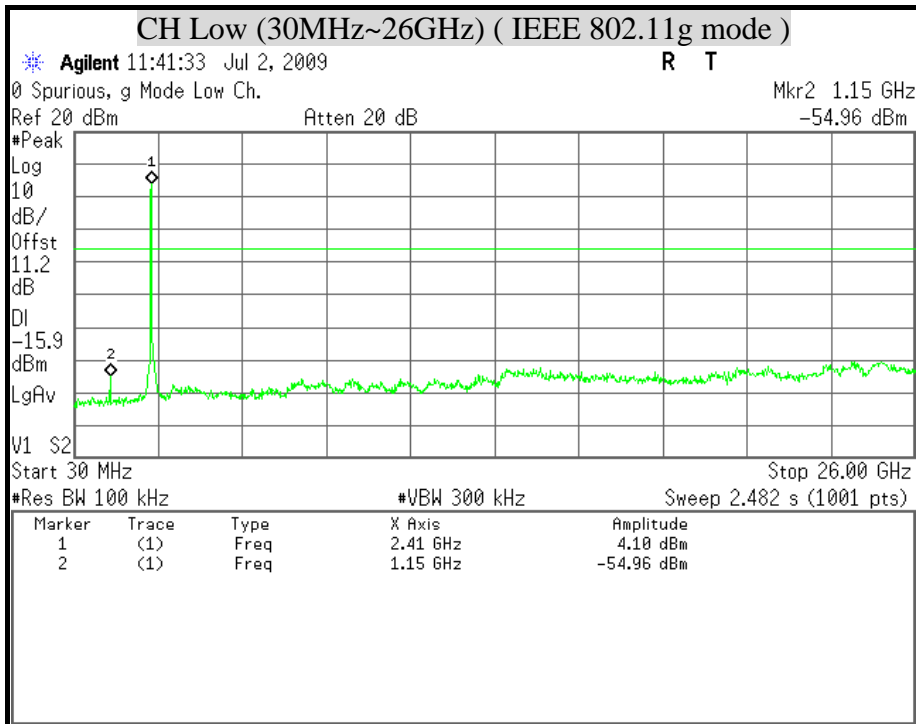



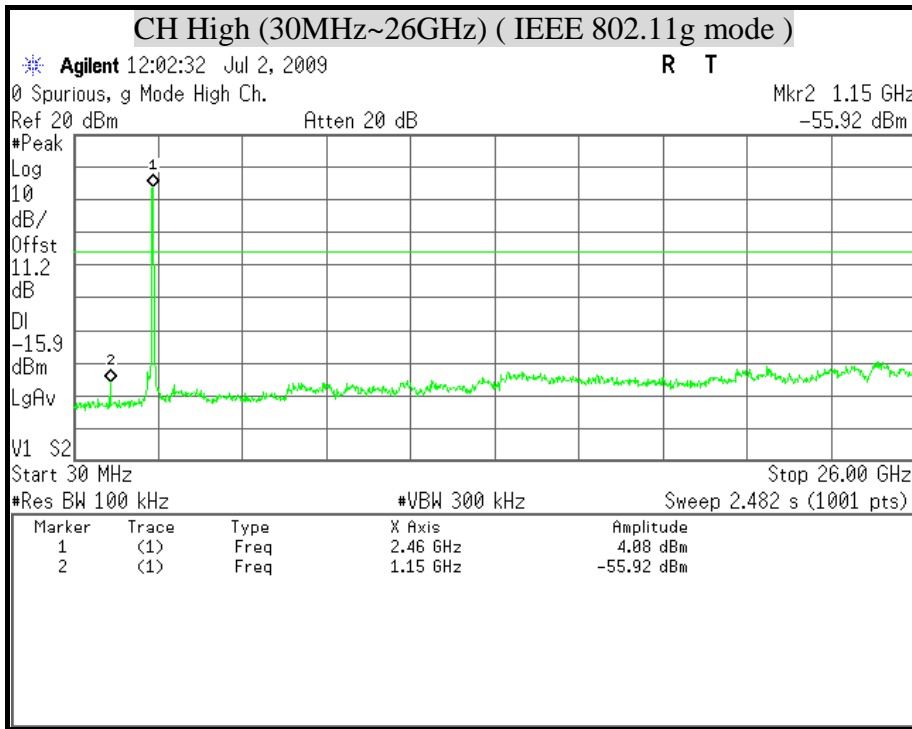





OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (IEEE 802.11n HT20 mode)

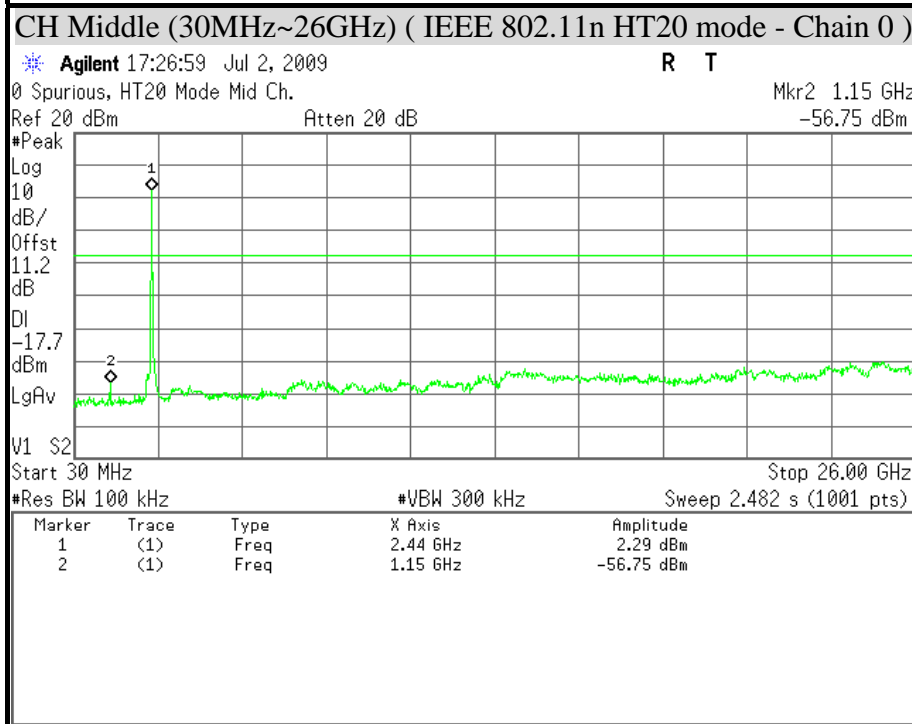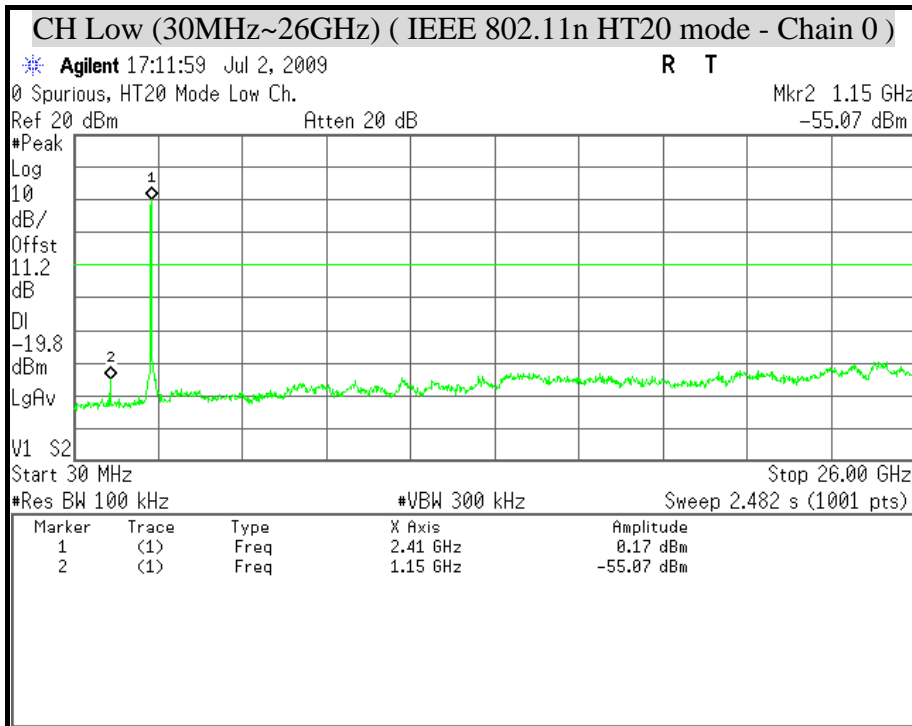

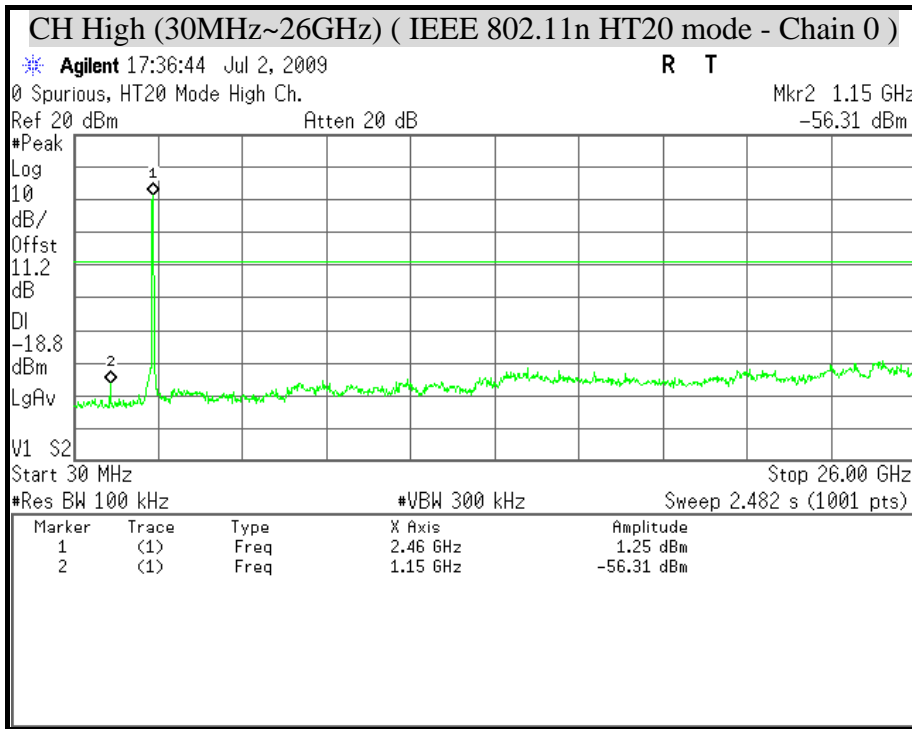

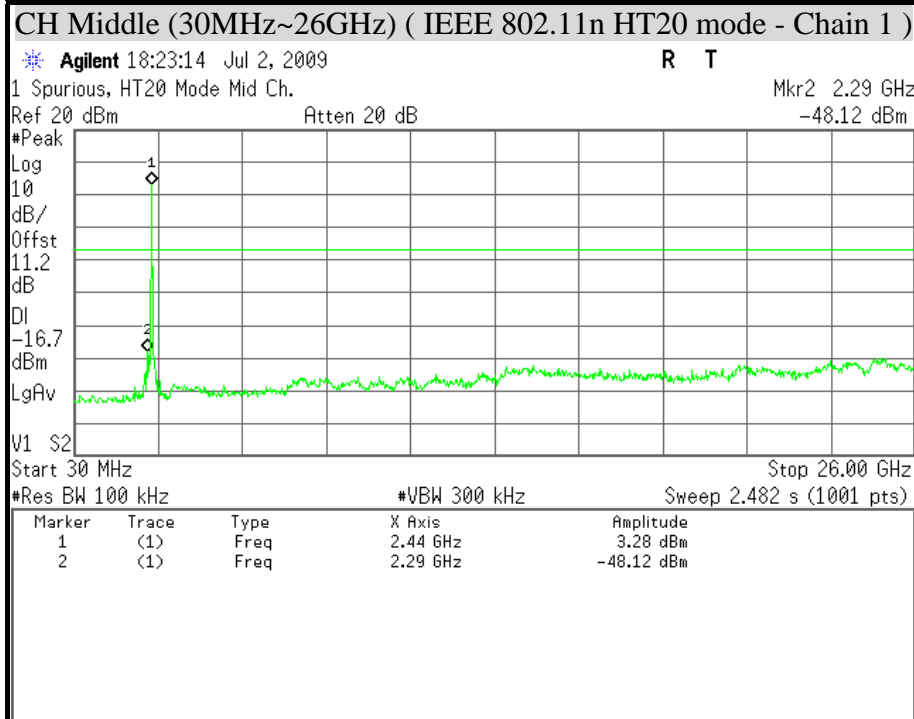
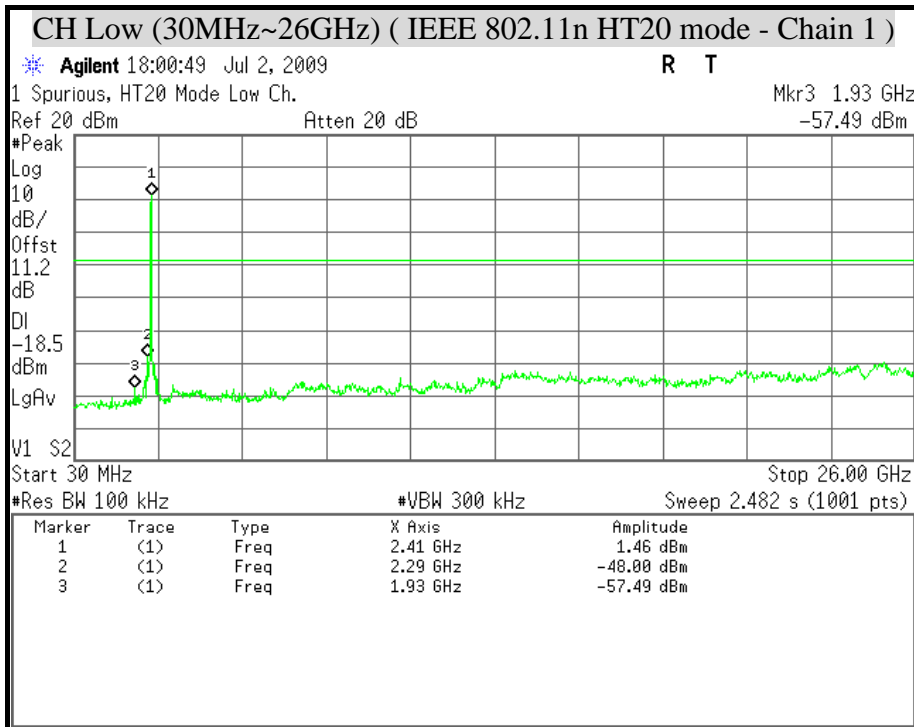


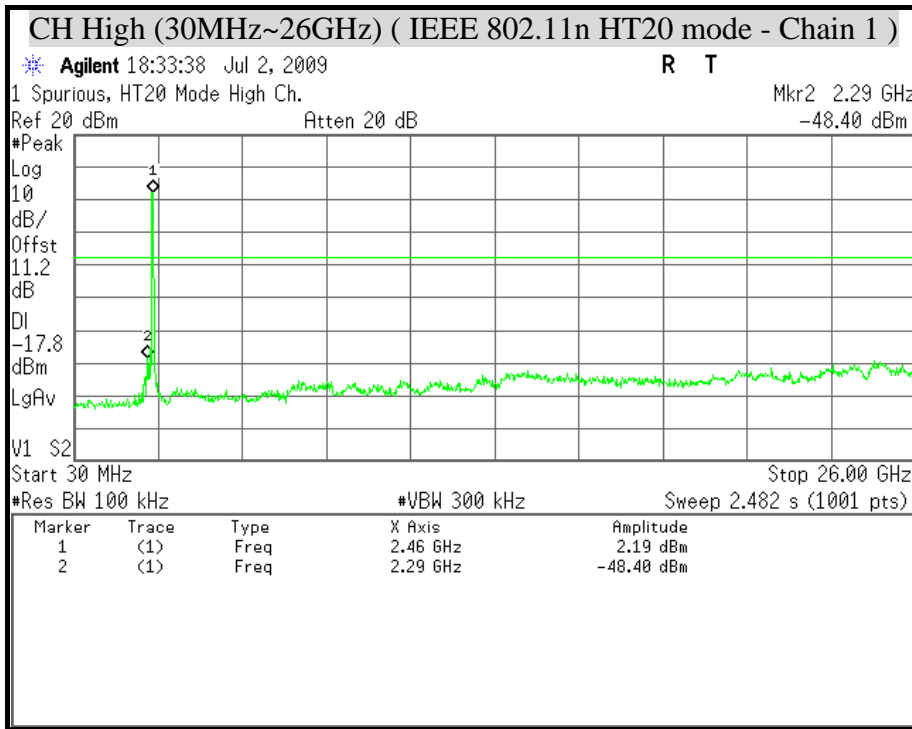




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(IEEE 802.11n HT20 Combined mode)

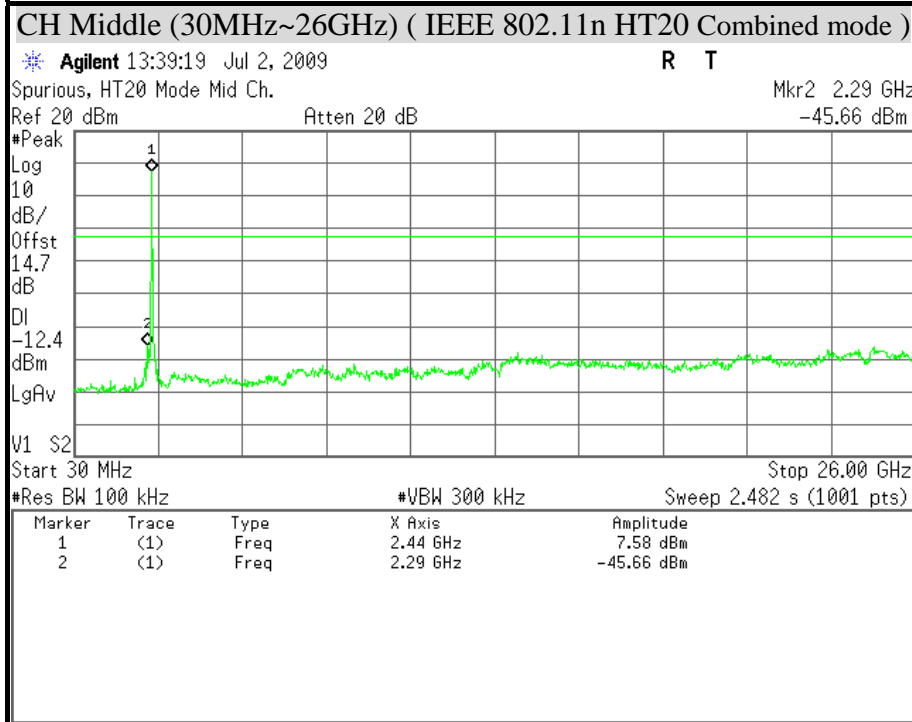
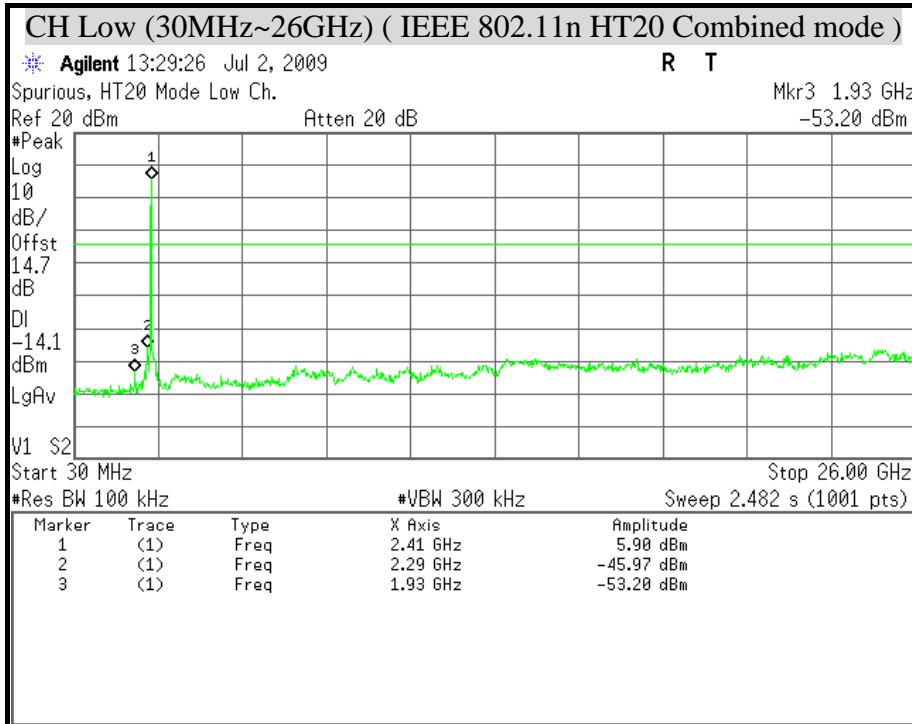


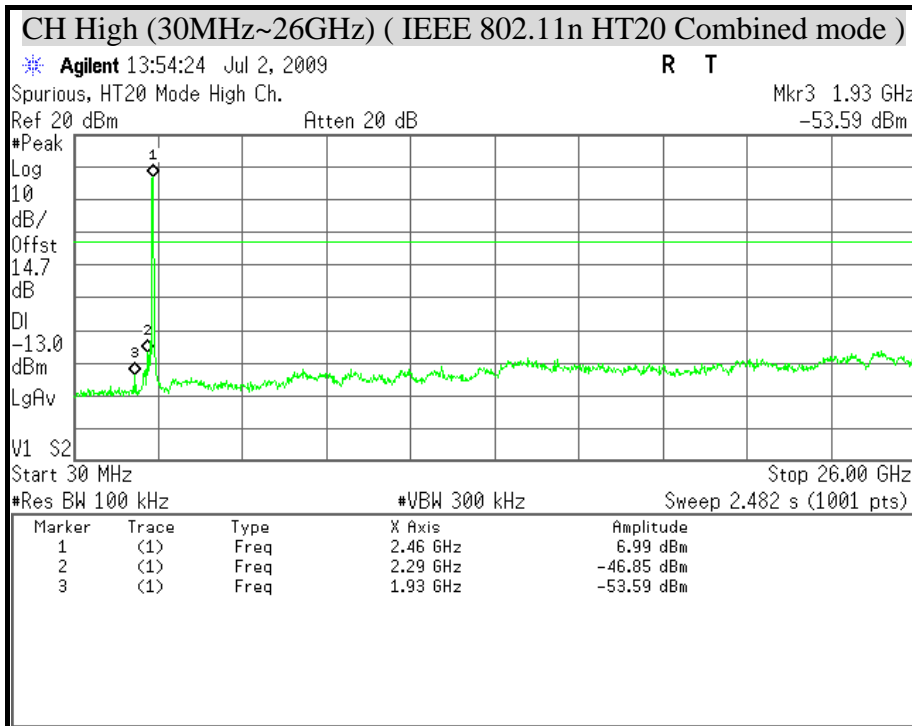







OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(IEEE 802.11n HT40 mode)

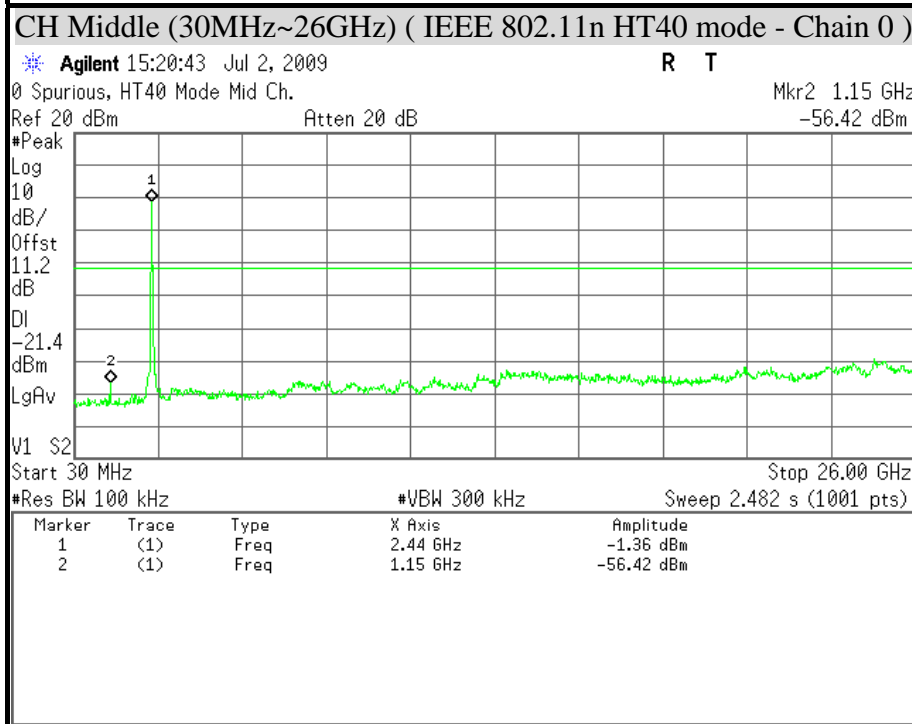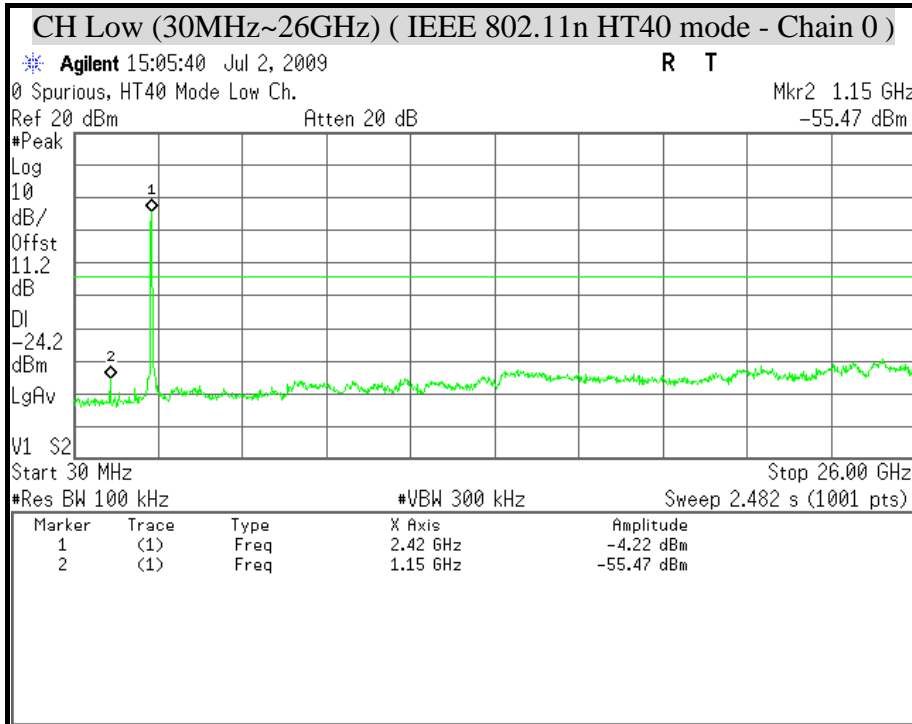

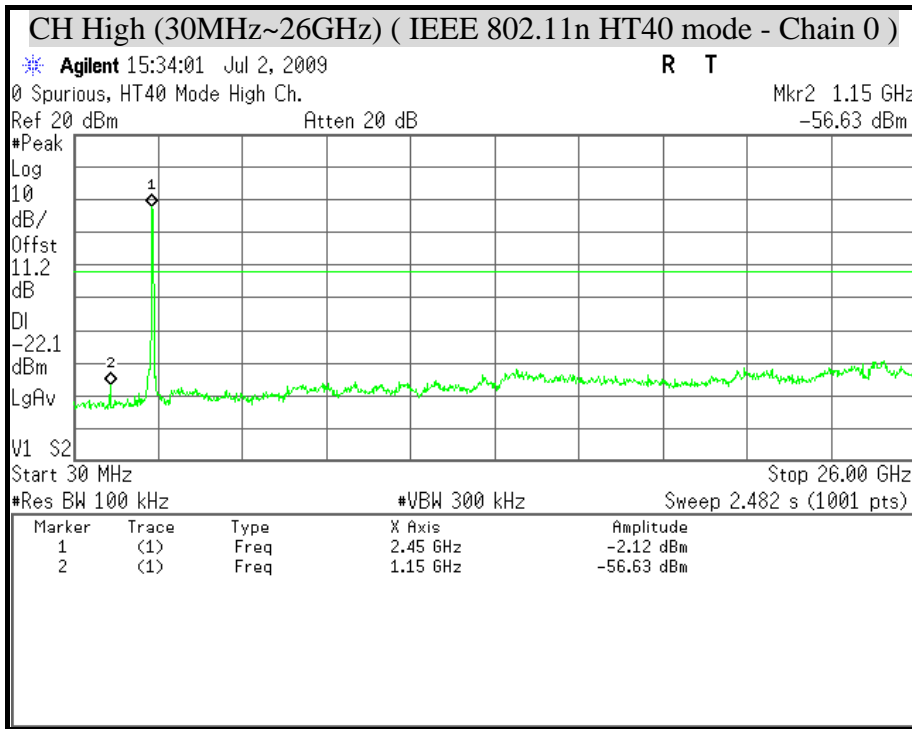

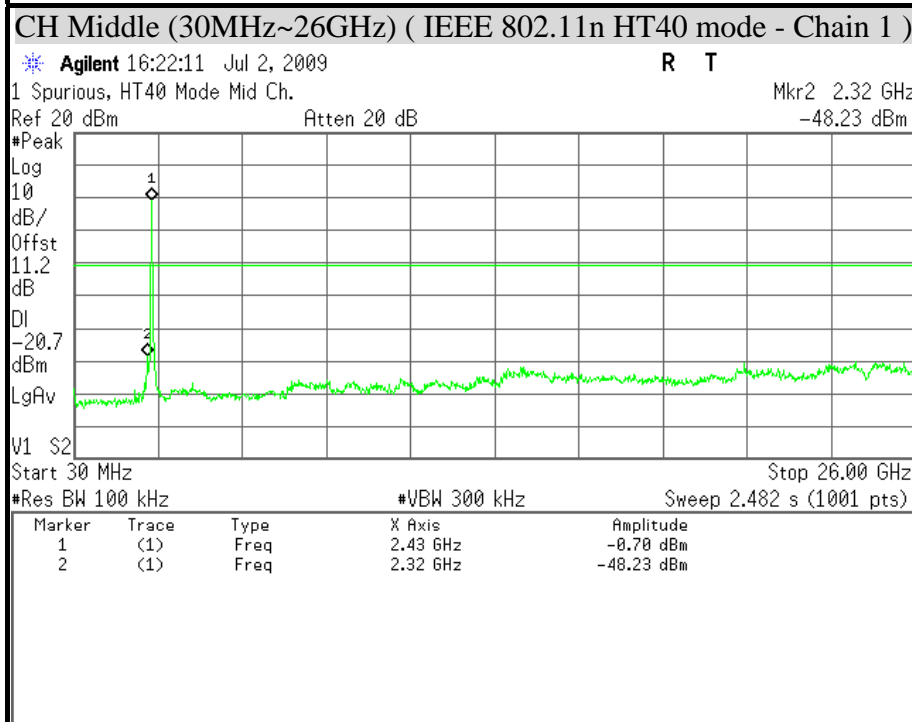
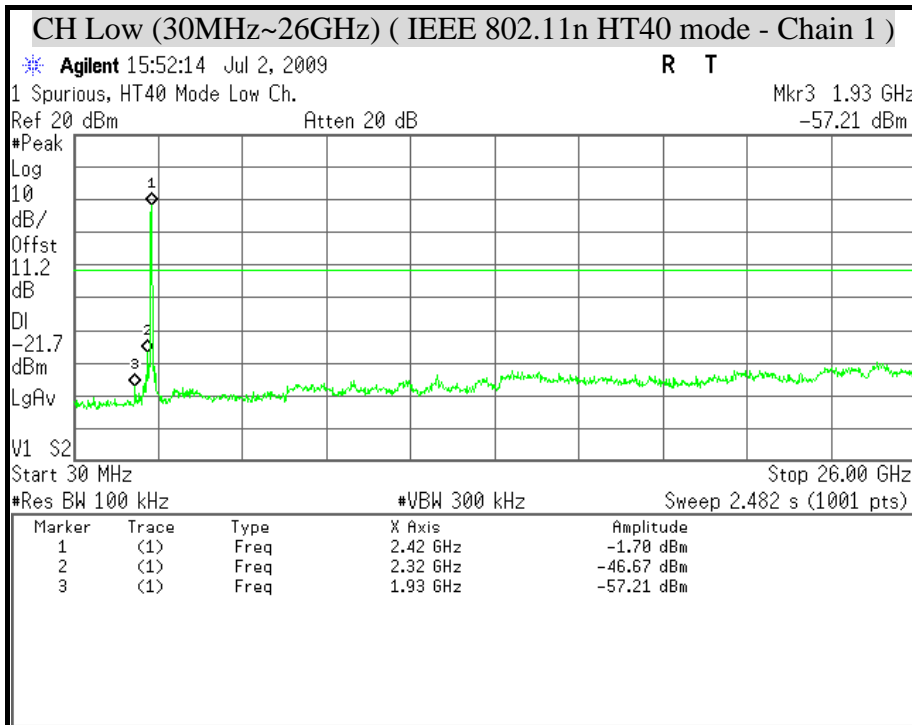


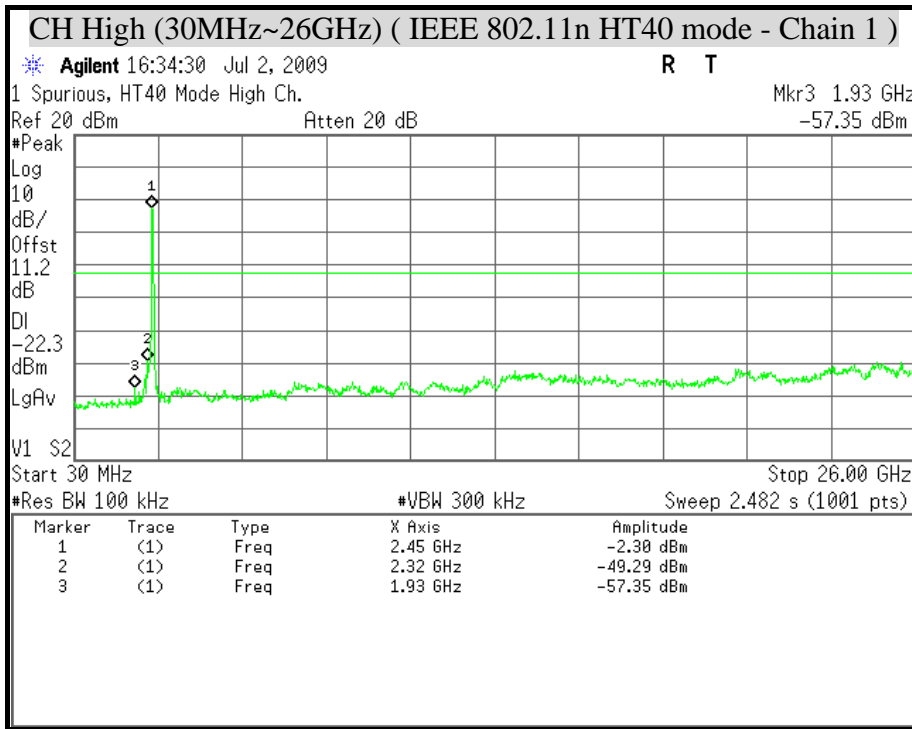




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(IEEE 802.11n HT40 Combined mode)

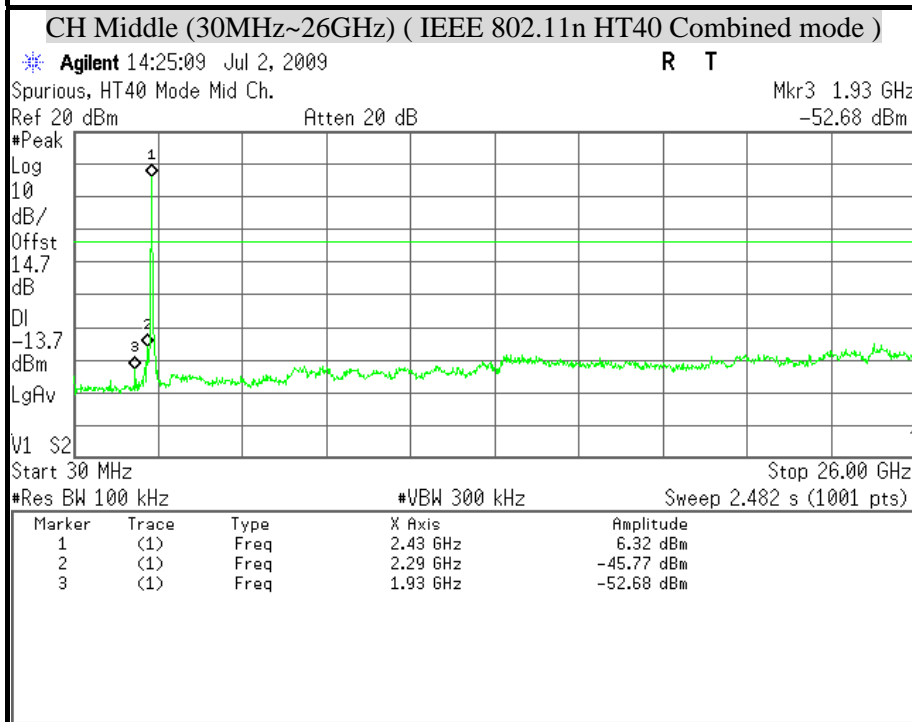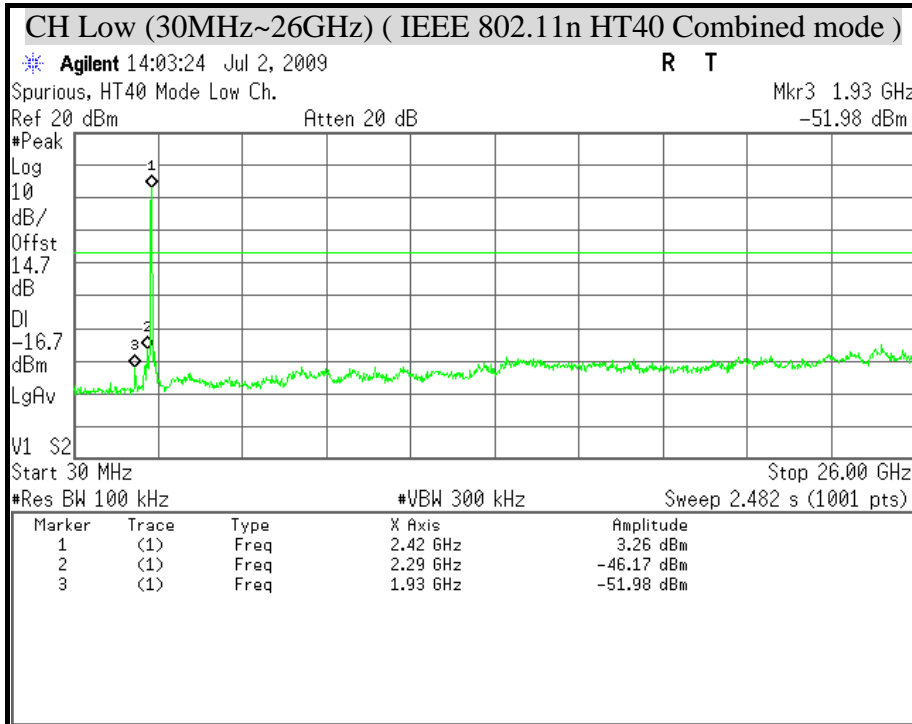

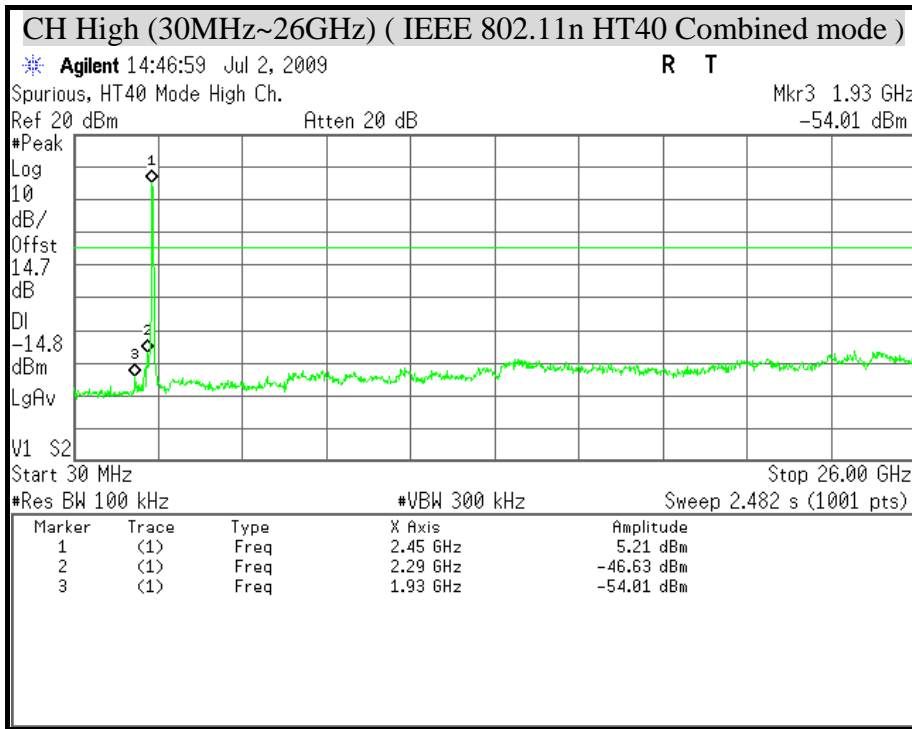



8.8 RADIATED EMISSIONS

8.8.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
SPECTRUM ANALYZER	AGILENT	E4446A	MY46180323	06/09/2010
EMI TEST RECEIVER	R & S	ESCI	100211	05/17/2010
BILOG ANTENNA	SCHWARZBECK	VULB9168	9168_249	09/17/2009
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00078732	06/30/2010
PRE-AMPLIFIER	EM	EM30265	07032612	05/21/2010
Notch Filters Band Reject	Micro-Tronics	BRM50702-01	009	N.C.R.
RF COAXIAL CABLE	HUBERSUHNER	SUCOFLEX 104PEA	SN31350	07/21/2009
LOOP ANTENNA	EMCO	6502	2356	05/28/2010

Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.


TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.


9kHz ~ 30MHz

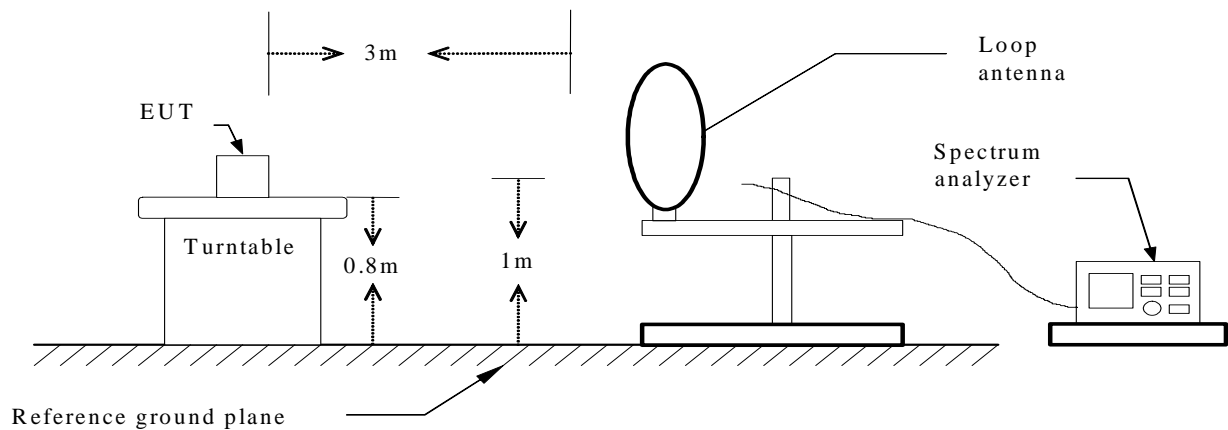

30MHz ~ 1GHz

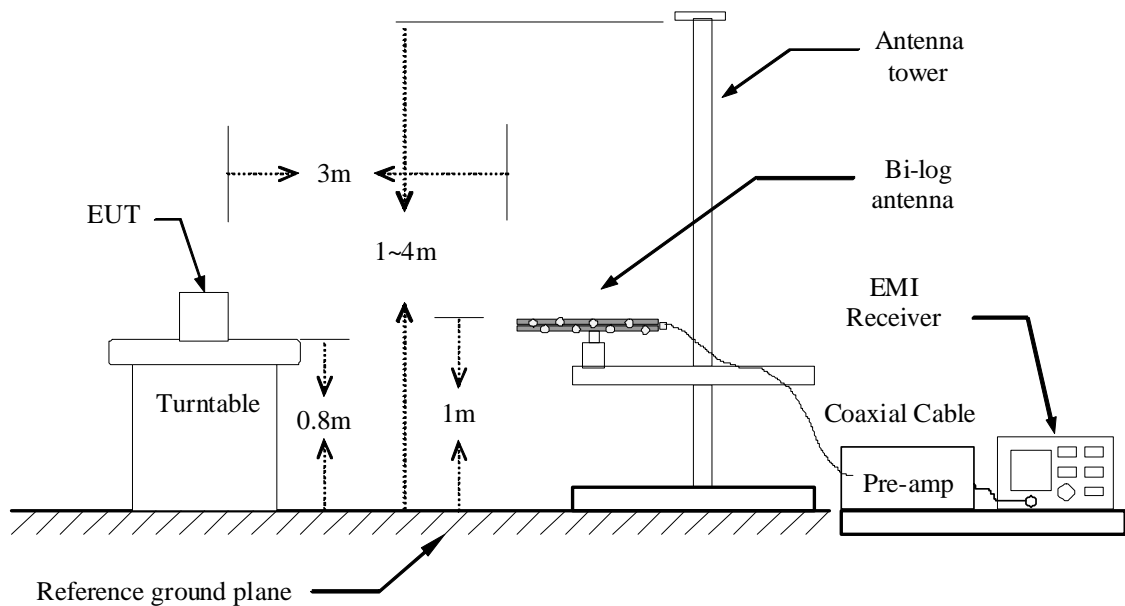

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

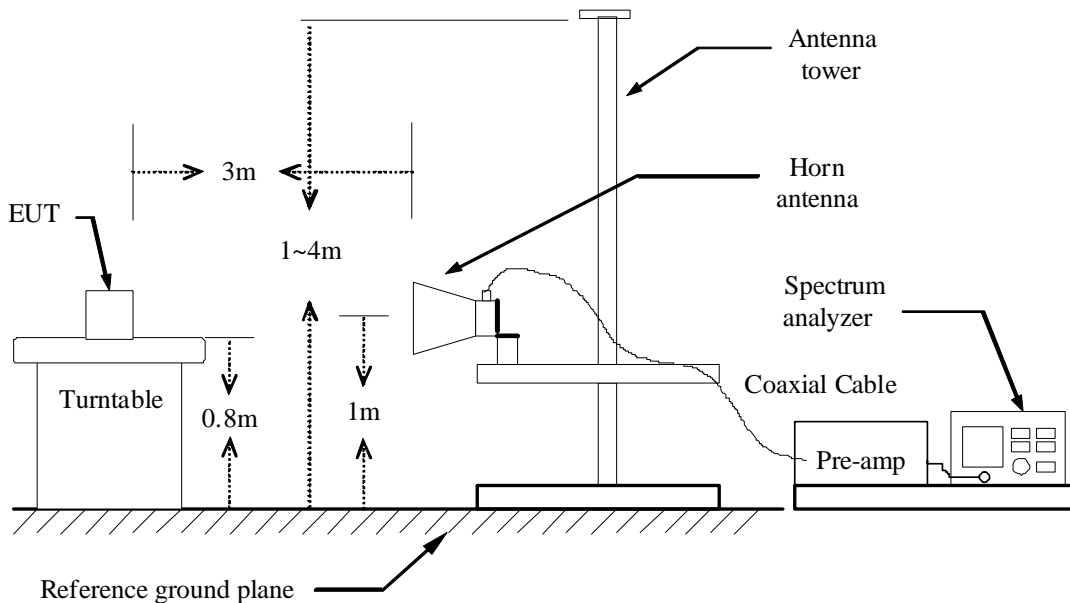

TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- White measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. White measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

**8.8.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz****BELOW 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz.

BELOW 1 GHz (30MHz ~ 1GHz)

Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	Normal operating (worst-case) Power Adapter (1)	TEMP & Humidity	24.9 °C, 54%

Horizontal						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
45.52	56.34	-30.20	26.15	40.00	-13.85	Peak
127.97	59.90	-32.92	26.98	43.50	-16.52	Peak
172.59	57.91	-31.56	26.35	43.50	-17.15	Peak
250.19	60.88	-30.29	30.59	46.00	-15.41	Peak
500.45	56.08	-25.16	30.92	46.00	-15.08	Peak
512.09	55.45	-24.96	30.49	46.00	-15.51	Peak
640.13	53.36	-22.76	30.61	46.00	-15.39	Peak
896.21	51.57	-19.06	32.51	46.00	-13.49	Peak
Vertical						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
89.17	63.28	-36.37	26.91	43.50	-16.59	Peak
188.11	59.60	-32.59	27.01	43.50	-16.49	Peak
250.19	61.76	-30.29	31.47	46.00	-14.53	Peak
450.01	54.33	-25.97	28.35	46.00	-17.65	Peak
500.45	54.28	-25.16	29.12	46.00	-16.88	Peak
640.13	54.74	-22.76	31.99	46.00	-14.01	Peak
768.17	51.29	-20.60	30.69	46.00	-15.31	Peak
896.21	51.07	-19.06	32.01	46.00	-13.99	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBμV/m) = Reading (dBμV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBμV/m) - Quasi-peak limit (dBμV/m).



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	Normal operating (worst-case) Power Adapter (2)	TEMP & Humidity	24.9°C, 54%

Horizontal						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
46.49	56.18	-30.21	25.97	40.00	-14.03	Peak
172.59	58.86	-31.56	27.30	43.50	-16.20	Peak
250.19	60.99	-30.29	30.70	46.00	-15.30	Peak
384.05	57.16	-27.19	29.97	46.00	-16.03	Peak
500.45	55.49	-25.16	30.33	46.00	-15.67	Peak
512.09	53.78	-24.96	28.82	46.00	-17.18	Peak
640.13	53.67	-22.76	30.92	46.00	-15.08	Peak
896.21	50.98	-19.06	31.92	46.00	-14.08	Peak
Vertical						
Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
43.58	58.16	-30.31	27.86	40.00	-12.14	Peak
89.17	64.50	-36.37	28.14	43.50	-15.36	Peak
198.78	59.26	-33.14	26.11	43.50	-17.39	Peak
250.19	61.86	-30.29	31.57	46.00	-14.43	Peak
500.45	55.33	-25.16	30.17	46.00	-15.83	Peak
512.09	57.29	-24.96	32.34	46.00	-13.66	Peak
640.13	55.55	-22.76	32.80	46.00	-13.20	Peak
896.21	50.30	-19.06	31.25	46.00	-14.75	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).

**8.8.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz**

Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11b TX (CH Low)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2412.00	103.35	100.17	-8.95	94.40	91.22	---	---	---	Carrier
4935.00	50.39	---	-4.27	46.12	---	74.00	54.00	-7.88	Peak
6547.50	49.89	---	-2.08	47.81	---	74.00	54.00	-6.19	Peak
8370.00	48.77	---	0.86	49.63	---	74.00	54.00	-4.37	Peak
9690.00	47.53	---	2.57	50.11	---	74.00	54.00	-3.89	Peak
11782.50	47.27	33.86	6.36	53.63	40.22	74.00	54.00	-13.78	AVG
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2412.00	106.90	103.06	-8.95	97.95	94.11	---	---	---	Carrier
3405.00	51.93	---	-7.51	44.42	---	74.00	54.00	-9.58	Peak
4822.50	49.28	---	-4.56	44.72	---	74.00	54.00	-9.28	Peak
6060.00	49.52	---	-2.66	46.86	---	74.00	54.00	-7.14	Peak
8265.00	47.56	---	0.73	48.28	---	74.00	54.00	-5.72	Peak
9645.00	56.51	53.23	2.51	59.02	55.74	77.95	74.11	-18.37	20dBc AVG Fundamental

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2438.00	102.96	99.74	-8.92	94.04	90.82	---	---	---	Carrier
3195.00	51.54	---	-7.82	43.72	---	74.00	54.00	-10.28	Peak
3360.00	51.92	---	-7.58	44.34	---	74.00	54.00	-9.66	Peak
4897.50	50.19	---	-4.37	45.82	---	74.00	54.00	-8.18	Peak
7410.00	49.01	---	-0.77	48.25	---	74.00	54.00	-5.75	Peak
9330.00	48.55	---	2.20	50.75	---	74.00	54.00	-3.25	Peak
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2434.00	107.12	103.63	-8.92	98.20	94.71	---	---	---	Carrier
4875.00	51.44	---	-4.42	47.01	---	74.00	54.00	-6.99	Peak
5940.00	49.30	---	-2.79	46.51	---	74.00	54.00	-7.49	Peak
7350.00	49.24	---	-0.81	48.43	---	74.00	54.00	-5.57	Peak
8190.00	48.29	---	0.63	48.92	---	74.00	54.00	-5.08	Peak
9750.00	54.57	51.62	2.66	57.23	54.28	78.20	74.71	-20.43	20dBc AVG Fundamental

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11b TX (CH High)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2462.00	100.90	97.16	-8.89	92.01	88.27	---	---	---	Carrier
4912.50	49.21	---	-4.33	44.89	---	74.00	54.00	-9.11	Peak
5662.50	50.29	---	-3.10	47.19	---	74.00	54.00	-6.81	Peak
8160.00	48.35	---	0.60	48.94	---	74.00	54.00	-5.06	Peak
10485.00	48.90	34.96	3.34	52.24	38.30	74.00	54.00	-1.76	Peak
11970.00	45.88	33.23	6.74	52.62	39.97	74.00	54.00	-1.38	Peak
13995.00	44.63	31.21	10.95	55.58	42.16	74.00	54.00	-11.84	AVG
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2462.00	106.77	103.23	-8.89	97.88	94.34	---	---	---	Carrier
4132.50	51.51	---	-6.31	45.20	---	74.00	54.00	-8.80	Peak
4927.50	51.54	---	-4.29	47.25	---	74.00	54.00	-6.75	Peak
9337.50	48.24	---	2.20	50.44	---	74.00	54.00	-3.56	Peak
10485.00	47.69	---	3.34	51.03	---	74.00	54.00	-2.97	Peak
14872.50	44.46	30.96	11.25	55.71	42.21	74.00	54.00	-11.79	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11g TX (CH Low)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2414.00	103.47	94.98	-8.94	94.52	86.04	---	---	---	Carrier
4815.00	50.25	---	-4.58	45.67	---	74.00	54.00	-8.33	Peak
6502.50	49.99	---	-2.18	47.81	---	74.00	54.00	-6.19	Peak
7755.00	47.88	---	-0.14	47.74	---	74.00	54.00	-6.26	Peak
9367.50	48.47	---	2.22	50.69	---	74.00	54.00	-3.31	Peak
10117.50	48.33	---	3.10	51.43	---	74.00	54.00	-2.57	Peak
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2418.00	108.40	97.87	-8.94	99.46	88.93	---	---	---	Carrier
4935.00	50.87	---	-4.27	46.60	---	74.00	54.00	-7.40	Peak
6735.00	49.89	---	-1.66	48.23	---	74.00	54.00	-5.77	Peak
7635.00	49.42	---	-0.41	49.01	---	74.00	54.00	-4.99	Peak
9667.50	47.74	---	2.54	50.29	---	74.00	54.00	-3.71	Peak
10162.50	47.97	---	3.13	51.10	---	74.00	54.00	-2.90	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2440.00	102.56	93.96	-8.92	93.65	85.04	---	---	---	Carrier
3660.00	51.56	---	-7.14	44.42	---	74.00	54.00	-9.58	Peak
4957.50	51.84	---	-4.21	47.63	---	74.00	54.00	-6.37	Peak
6825.00	48.97	---	-1.45	47.51	---	74.00	54.00	-6.49	Peak
9382.50	47.75	---	2.23	49.98	---	74.00	54.00	-4.02	Peak
11707.50	47.13	34.20	6.20	53.34	40.40	74.00	54.00	-13.60	AVG
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2432.00	107.49	97.86	-8.92	98.57	88.94	---	---	---	Carrier
4942.50	50.35	---	-4.25	46.10	---	74.00	54.00	-7.90	Peak
5760.00	50.12	---	-2.99	47.13	---	74.00	54.00	-6.87	Peak
7447.50	48.36	---	-0.74	47.62	---	74.00	54.00	-6.38	Peak
10155.00	49.17	34.85	3.12	52.30	37.97	74.00	54.00	-17.97	AVG
11272.50	48.18	34.07	4.85	53.03	38.92	74.00	54.00	-15.08	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11g TX (CH High)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2456.00	102.84	94.17	-8.90	93.95	85.27	---	---	---	Carrier
4147.50	51.39	---	-6.28	45.11	---	74.00	54.00	-8.89	Peak
4950.00	49.67	---	-4.23	45.44	---	74.00	54.00	-8.56	Peak
5977.50	49.89	---	-2.75	47.14	---	74.00	54.00	-6.86	Peak
8025.00	48.16	---	0.43	48.59	---	74.00	54.00	-5.41	Peak
9210.00	48.40	---	2.12	50.52	---	74.00	54.00	-3.48	Peak
14707.50	44.41	30.98	11.44	55.85	42.42	74.00	54.00	-11.58	AVG
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2464.00	109.08	99.48	-8.89	100.19	90.59	---	---	---	Carrier
4950.00	50.49	---	-4.23	46.26	---	74.00	54.00	-7.74	Peak
7380.00	48.41	---	-0.79	47.63	---	74.00	54.00	-6.37	Peak
9112.50	48.15	---	2.06	50.21	---	74.00	54.00	-3.79	Peak
11722.50	46.74	30.51	6.23	52.98	36.74	74.00	54.00	-17.26	AVG
15645.00	45.18	31.27	11.38	56.56	42.65	74.00	54.00	-11.35	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2412.00	105.46	96.98	-8.95	96.52	88.03	---	---	---	Carrier
6000.00	49.66	---	-2.72	46.93	---	74.00	54.00	-7.07	Peak
7462.50	48.04	---	-0.73	47.31	---	74.00	54.00	-6.69	Peak
9255.00	48.36	---	2.15	50.51	---	74.00	54.00	-3.49	Peak
10132.50	48.82	---	3.11	51.93	---	74.00	54.00	-2.07	Peak
11955.00	45.40	32.69	6.71	52.11	39.40	74.00	54.00	-14.60	AVG
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2414.00	107.93	99.68	-8.94	98.99	90.74	---	---	---	Carrier
4942.50	50.12	---	-4.25	45.87	---	74.00	54.00	-8.13	Peak
7440.00	48.12	---	-0.74	47.38	---	74.00	54.00	-6.62	Peak
8197.50	47.74	---	0.64	48.38	---	74.00	54.00	-5.62	Peak
10747.50	47.56	---	3.55	51.10	---	74.00	54.00	-2.90	Peak
13950.00	44.86	30.87	10.95	55.82	41.82	74.00	54.00	-12.18	AVG

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2436.00	105.68	97.40	-8.92	96.76	88.48	---	---	---	Carrier
4065.00	51.49	---	-6.48	45.00	---	74.00	54.00	-9.00	Peak
4920.00	49.64	---	-4.31	45.33	---	74.00	54.00	-8.67	Peak
6037.50	49.96	---	-2.68	47.28	---	74.00	54.00	-6.72	Peak
7740.00	48.14	---	-0.17	47.96	---	74.00	54.00	-6.04	Peak
10170.00	48.41	---	3.13	51.54	---	74.00	54.00	-2.46	Peak
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2436.00	111.36	103.40	-8.92	102.44	94.48	---	---	---	Carrier
4965.00	50.17	---	-4.19	45.98	---	74.00	54.00	-8.02	Peak
6052.50	50.08	---	-2.67	47.41	---	74.00	54.00	-6.59	Peak
8340.00	47.44	---	0.82	48.26	---	74.00	54.00	-5.74	Peak
9915.00	47.48	---	2.90	50.38	---	74.00	54.00	-3.62	Peak
10860.00	47.80	---	3.64	51.44	---	74.00	54.00	-2.56	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2462.00	106.06	97.56	-8.89	97.17	88.67	---	---	---	Carrier
4200.00	50.21	---	-6.14	44.07	---	74.00	54.00	-9.93	Peak
4927.50	49.84	---	-4.29	45.55	---	74.00	54.00	-8.45	Peak
5362.50	49.49	---	-3.51	45.98	---	74.00	54.00	-8.02	Peak
6952.50	48.16	---	-1.16	47.00	---	74.00	54.00	-7.00	Peak
9472.50	48.71	---	2.28	50.99	---	74.00	54.00	-3.01	Peak
13402.50	43.33	30.23	10.59	53.92	40.82	74.00	54.00	-13.18	AVG
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2464.00	110.86	101.84	-8.89	101.97	92.95	---	---	---	Carrier
4882.50	49.55	---	-4.40	45.15	---	74.00	54.00	-8.85	Peak
5595.00	49.94	---	-3.18	46.76	---	74.00	54.00	-7.24	Peak
8415.00	47.48	---	0.92	48.40	---	74.00	54.00	-5.60	Peak
9667.50	48.18	---	2.54	50.72	---	74.00	54.00	-3.28	Peak
10470.00	47.74	---	3.33	51.07	---	74.00	54.00	-2.93	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11n HT40 TX (CH Low)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2426.00	101.37	92.12	-8.93	92.43	83.19	---	---	---	Carrier
4845.00	49.11	---	-4.50	44.60	---	74.00	54.00	-9.40	Peak
6022.50	50.07	---	-2.70	47.37	---	74.00	54.00	-6.63	Peak
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2416.00	104.60	96.08	-8.94	95.66	87.14	---	---	---	Carrier
4815.00	49.56	---	-4.58	44.98	---	74.00	54.00	-9.02	Peak
7710.00	48.85	---	-0.24	48.61	---	74.00	54.00	-5.39	Peak
10830.00	48.18	---	3.61	51.79	---	74.00	54.00	-2.21	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11n HT40 TX (CH Middle)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2430.00	103.52	94.91	-8.93	94.59	85.98	---	---	---	Carrier
4965.00	49.60	---	-4.19	45.41	---	74.00	54.00	-8.59	Peak
5775.00	49.85	---	-2.98	46.87	---	74.00	54.00	-7.13	Peak
8235.00	48.27	---	0.69	48.96	---	74.00	54.00	-5.04	Peak
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2432.00	108.86	99.53	-8.92	99.94	90.61	---	---	---	Carrier
3487.50	50.96	---	-7.39	43.56	---	74.00	54.00	-10.44	Peak
4942.50	50.16	---	-4.25	45.91	---	74.00	54.00	-8.09	Peak
6720.00	48.97	---	-1.69	47.28	---	74.00	54.00	-6.72	Peak
7477.50	48.99	---	-0.72	48.27	---	74.00	54.00	-5.73	Peak
8407.50	48.43	---	0.91	49.34	---	74.00	54.00	-4.66	Peak
10815.00	47.78	---	3.60	51.39	---	74.00	54.00	-2.61	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Wireless N Router	Test Date	2009/07/02
Model	DIR-615	Test By	Rueyyan Lin
Test Mode	IEEE 802.11n HT40 TX (CH High)	TEMP & Humidity	24.9°C, 54%

Horizontal									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2454.00	100.11	91.32	-8.90	91.21	82.42	---	---	---	Carrier
4935.00	49.47	---	-4.27	45.20	---	74.00	54.00	-8.80	Peak
7410.00	48.34	---	-0.77	47.57	---	74.00	54.00	-6.43	Peak
10462.50	47.81	---	3.33	51.14	---	74.00	54.00	-2.86	Peak
Vertical									
Frequency (MHz)	Reading-PK (dBμV)	Reading-AV (dBμV)	Correction Factor (dB/m)	Result-PK (dBμV/m)	Result-AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-AV (dBμV/m)	Margin (dB)	Remark
2454.00	105.26	96.03	-8.90	96.36	87.13	---	---	---	Carrier
4920.00	49.57	---	-4.31	45.26	---	74.00	54.00	-8.74	Peak
7327.50	47.69	---	-0.82	46.87	---	74.00	54.00	-7.13	Peak
7552.50	49.72	---	-0.59	49.13	---	74.00	54.00	-4.87	Peak

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



8.8.4 RESTRICTED BAND EDGES


Detector mode : Peak

Polarity : Horizontal

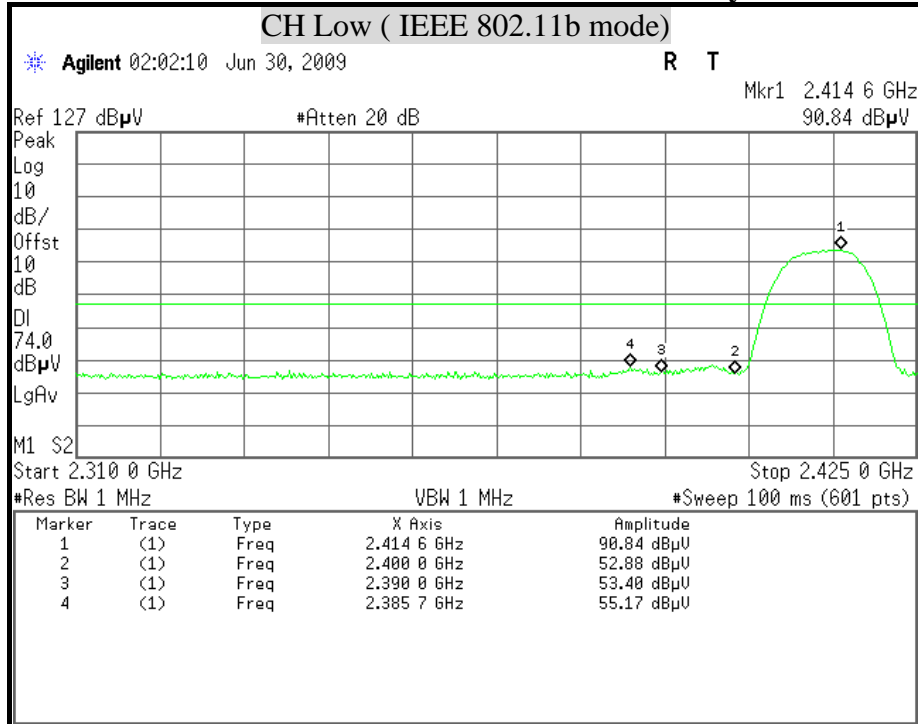

Detector mode : Average


Polarity : Horizontal

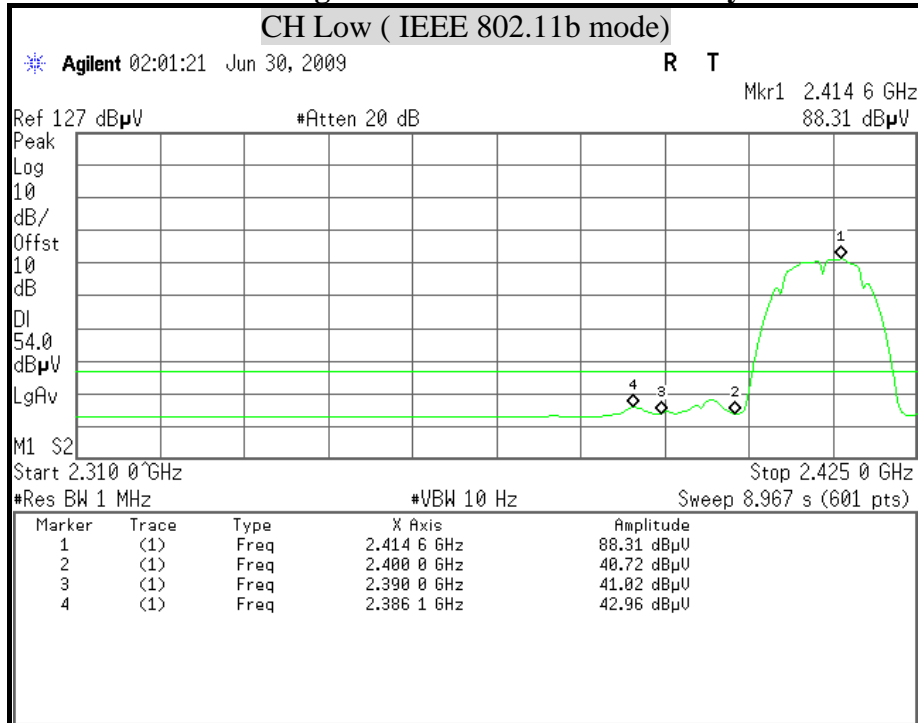




Detector mode : Peak

Polarity : Vertical

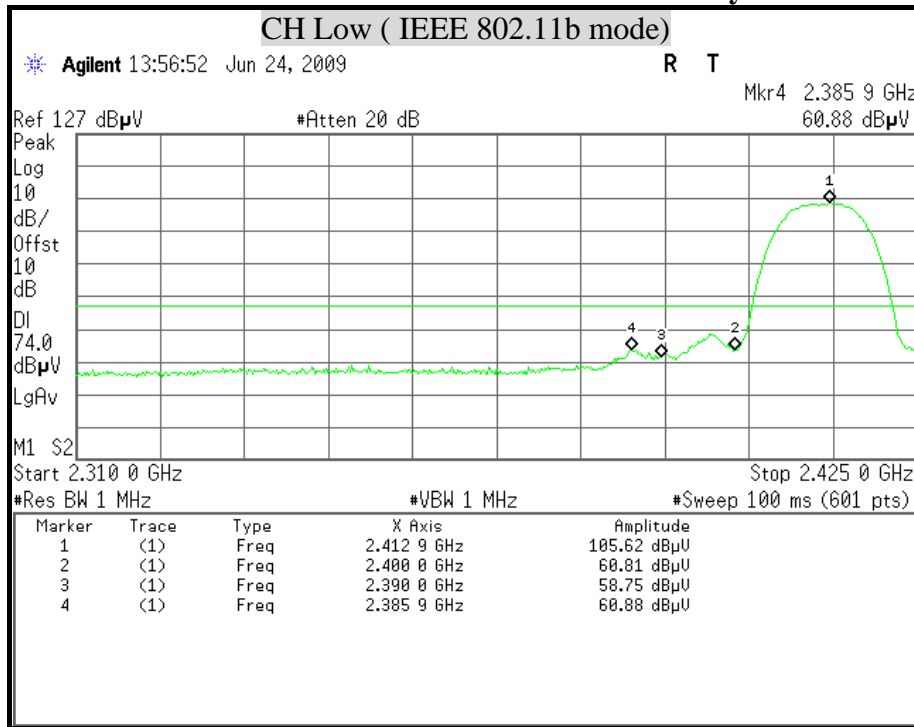

Detector mode : Average


Polarity : Vertical

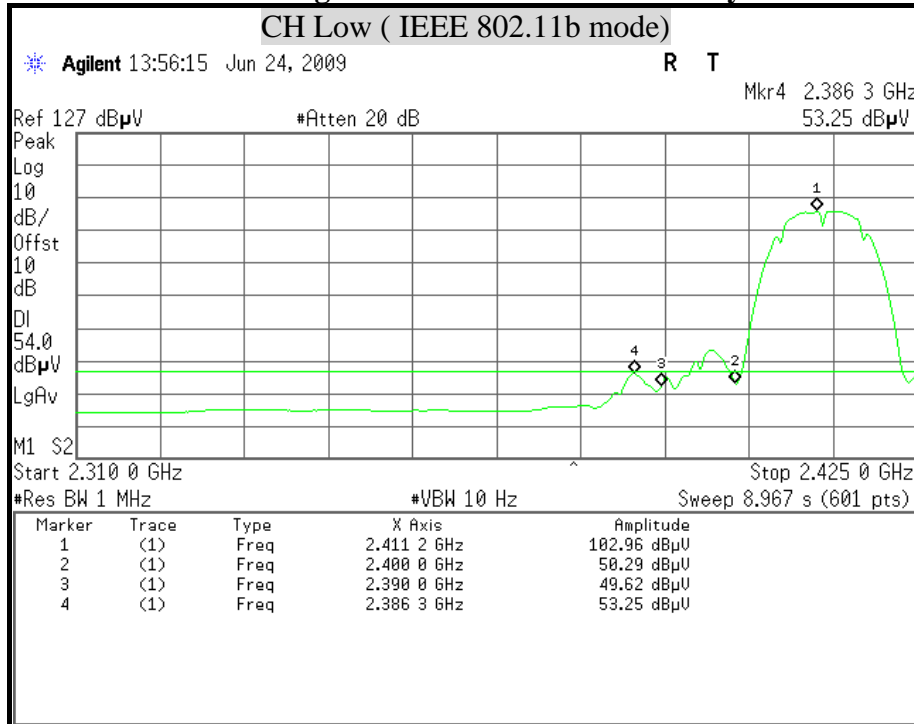




Detector mode : Peak

Polarity : Horizontal

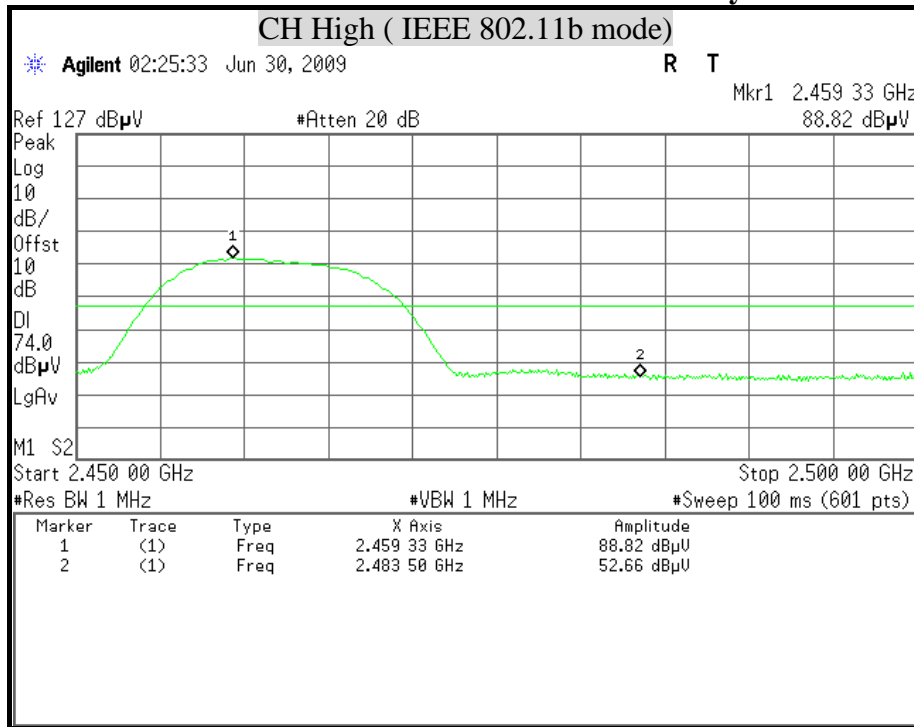

Detector mode : Average


Polarity : Horizontal

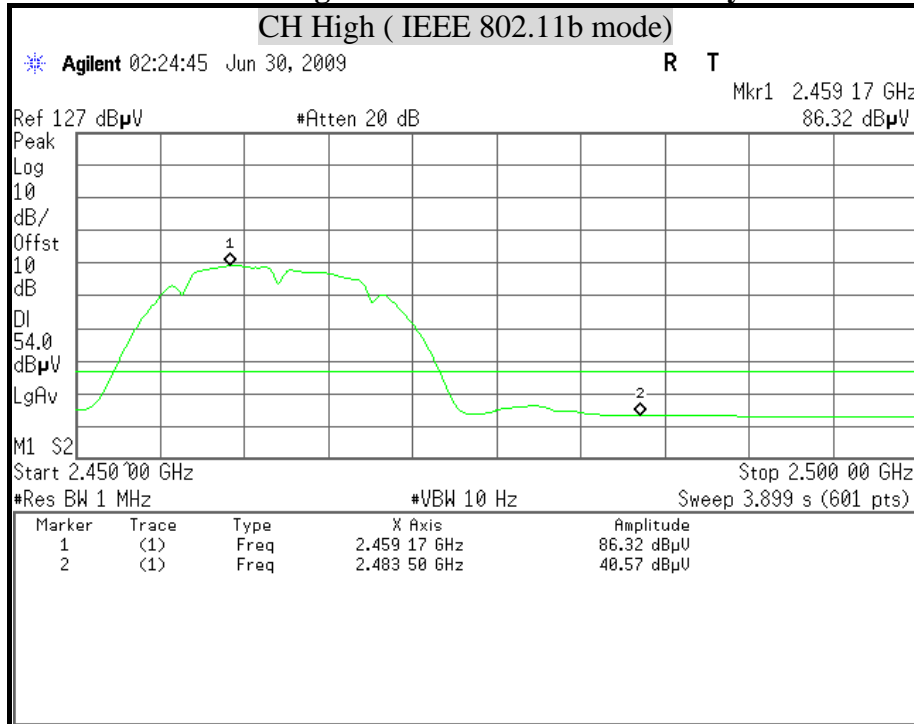




Detector mode : Peak

Polarity : Vertical

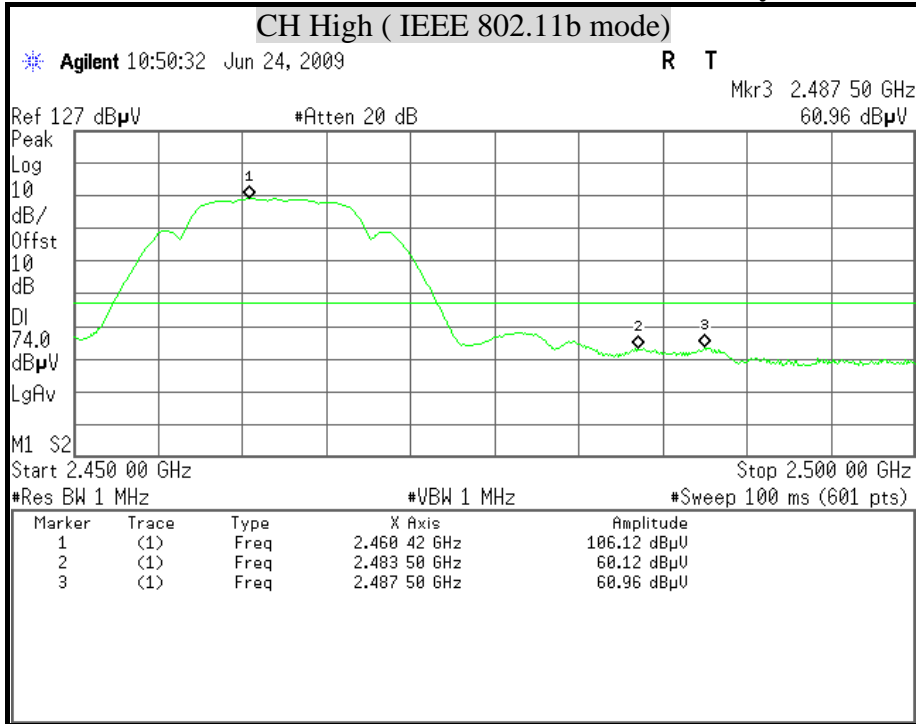

Detector mode : Average


Polarity : Vertical

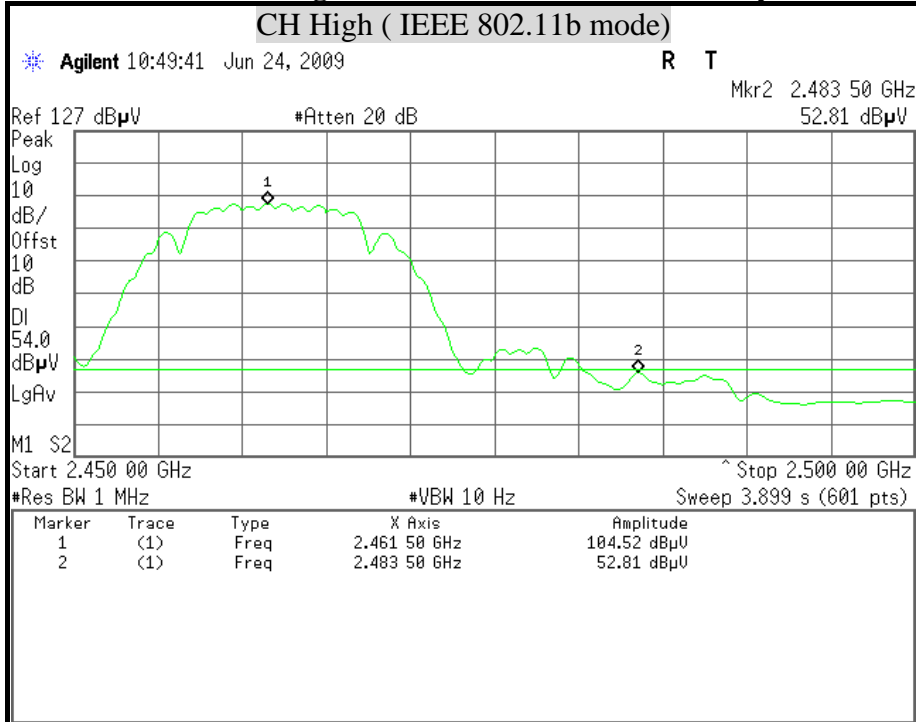




Detector mode : Peak

Polarity : Horizontal

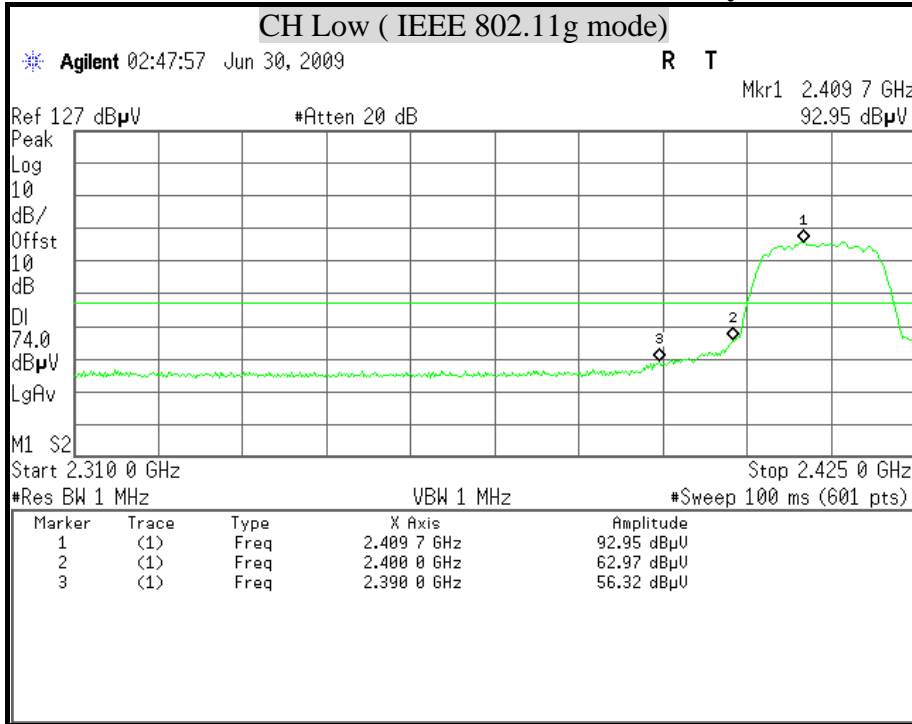

Detector mode : Average


Polarity : Horizontal

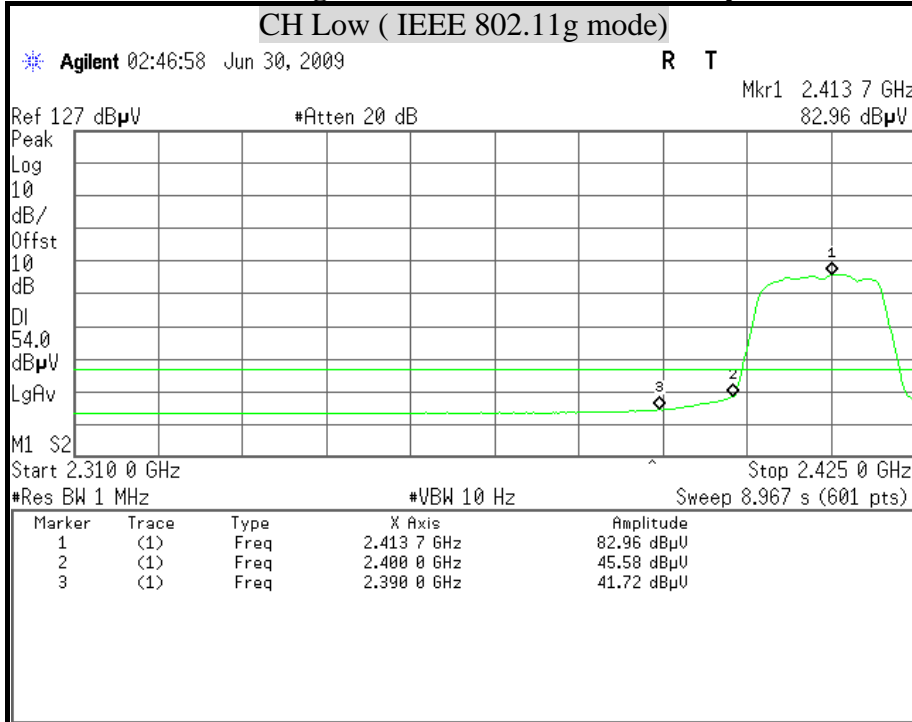




Detector mode : Peak

Polarity : Vertical

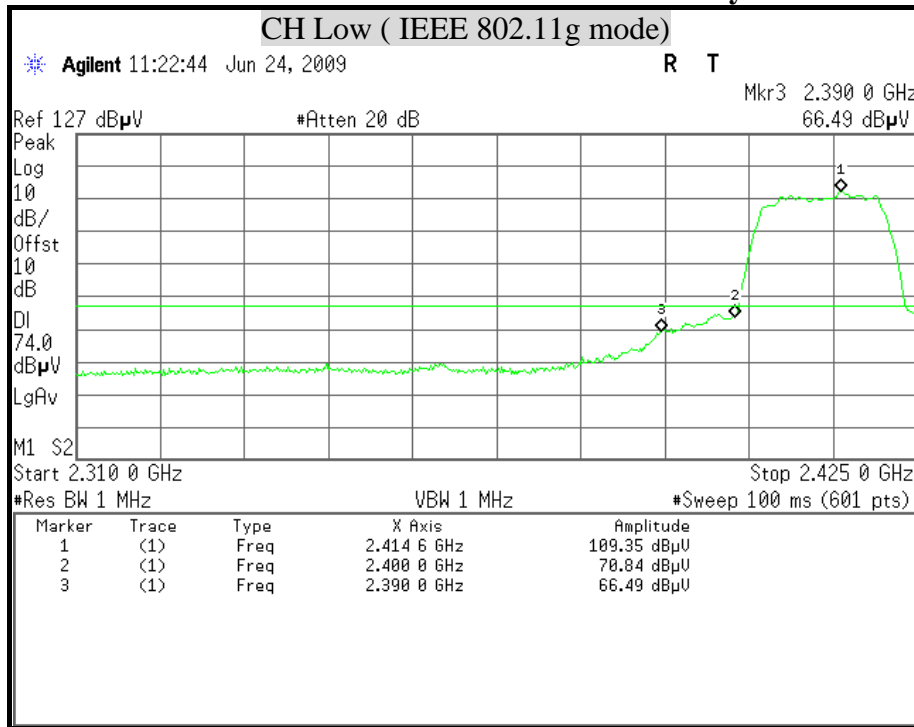

Detector mode : Average


Polarity : Vertical

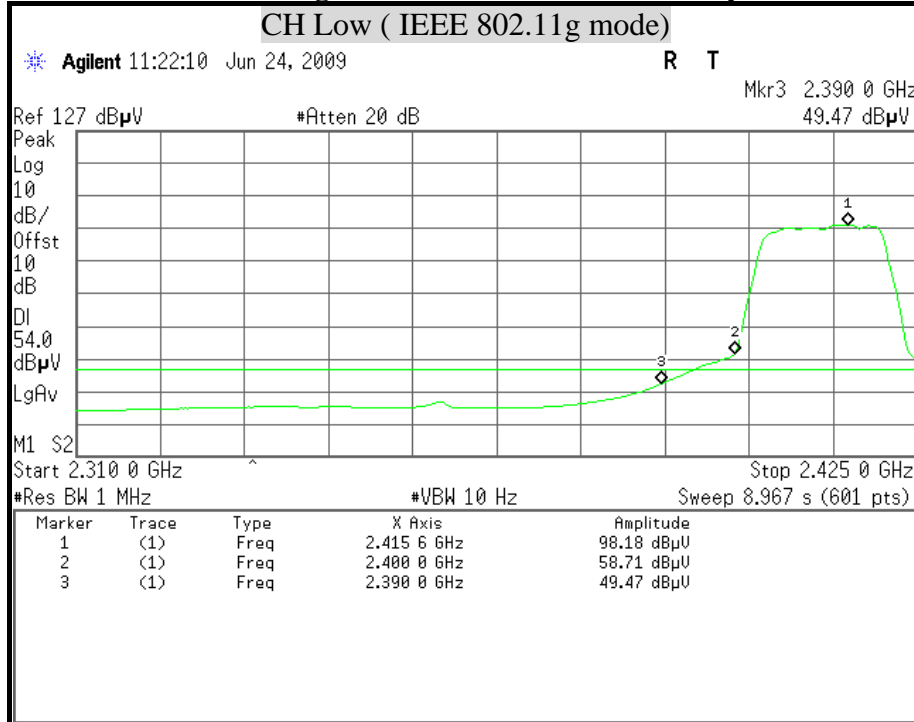




Detector mode : Peak

Polarity : Horizontal

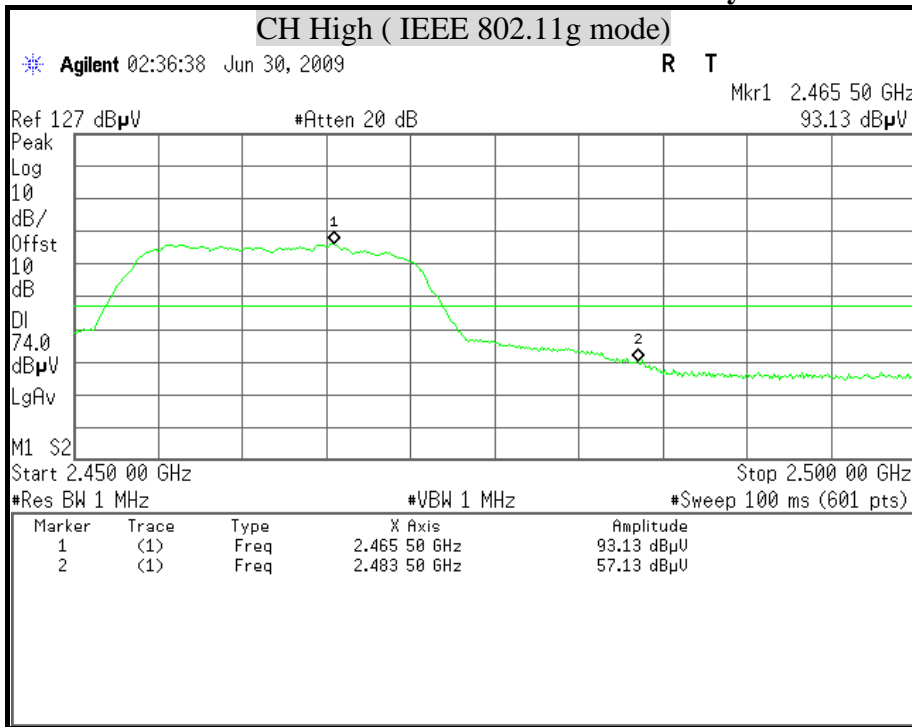

Detector mode : Average


Polarity : Horizontal

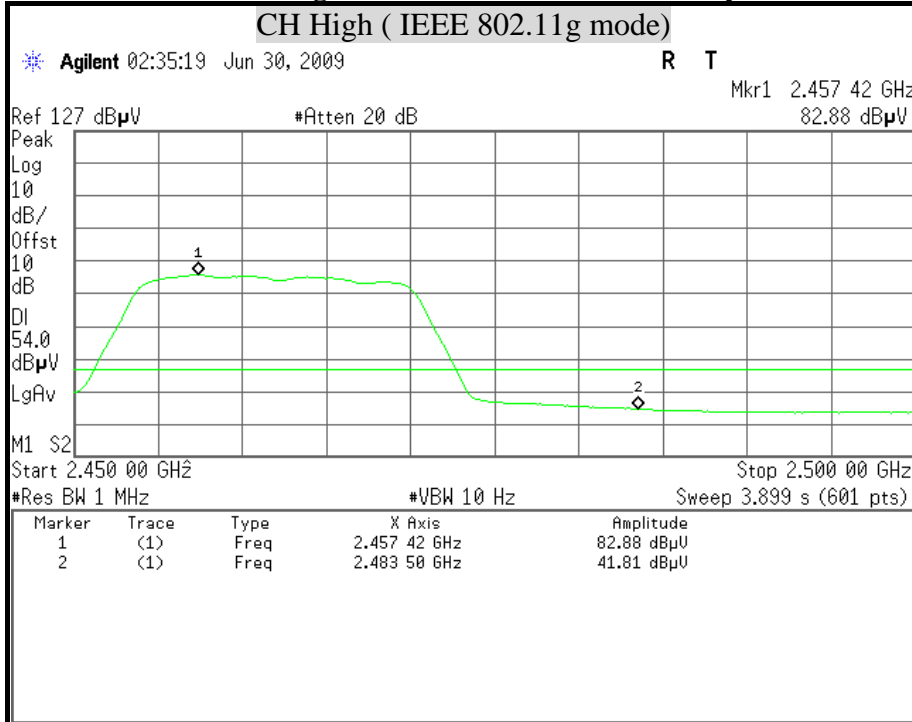




Detector mode : Peak

Polarity : Vertical

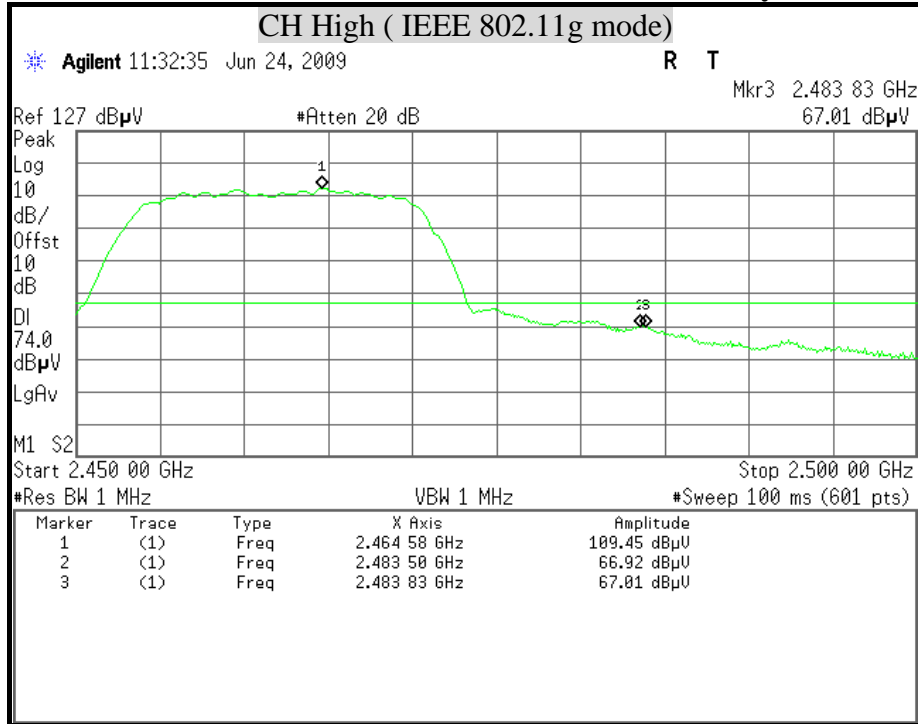

Detector mode : Average


Polarity : Vertical

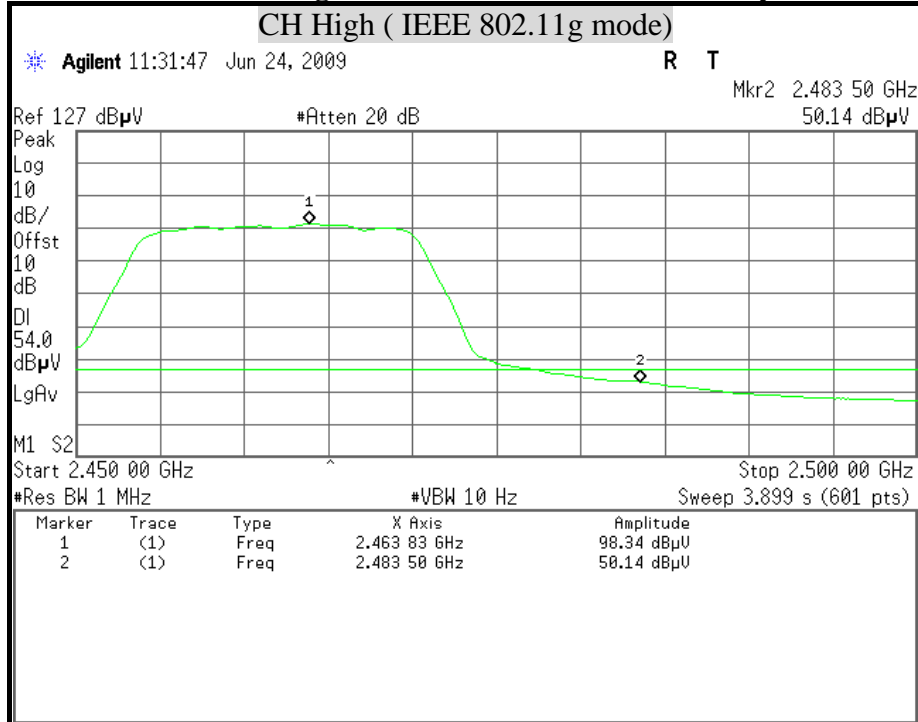




Detector mode : Peak

Polarity : Horizontal

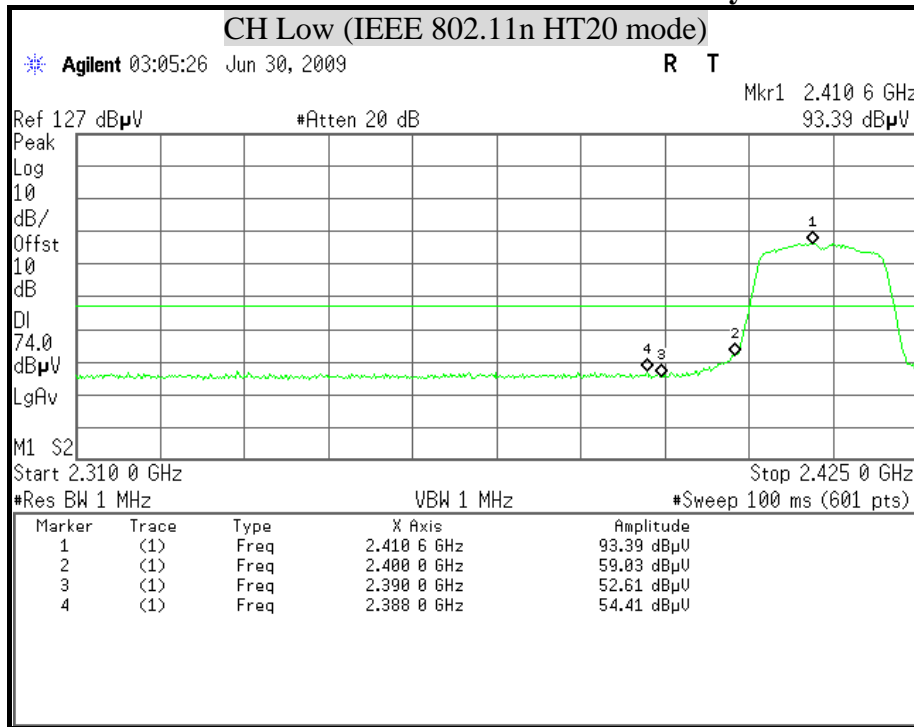

Detector mode : Average


Polarity : Horizontal

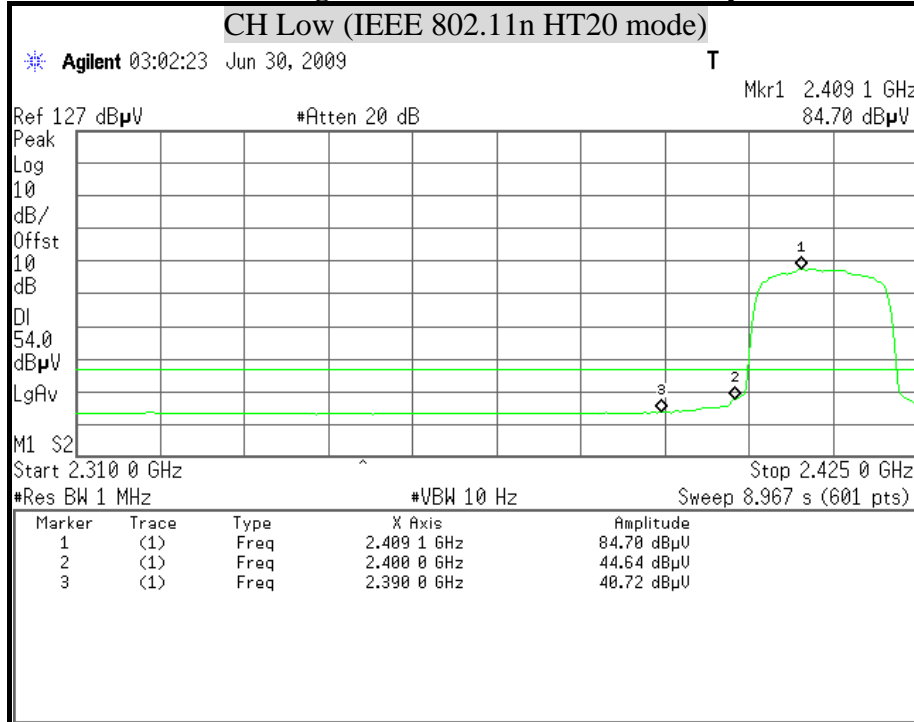




Detector mode : Peak

Polarity : Vertical

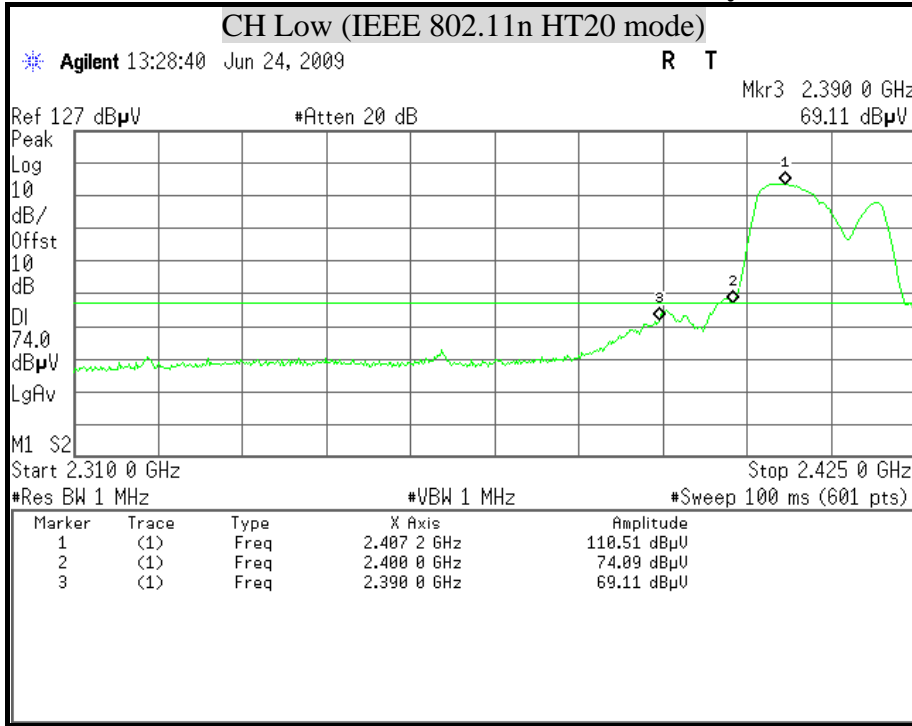

Detector mode : Average


Polarity : Vertical

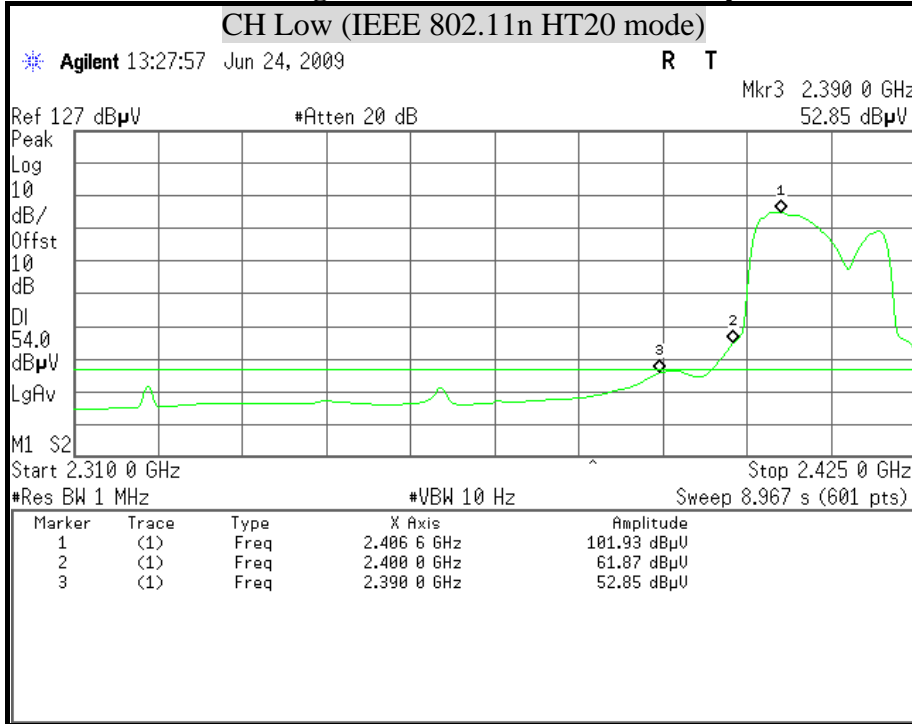




Detector mode : Peak

Polarity : Horizontal

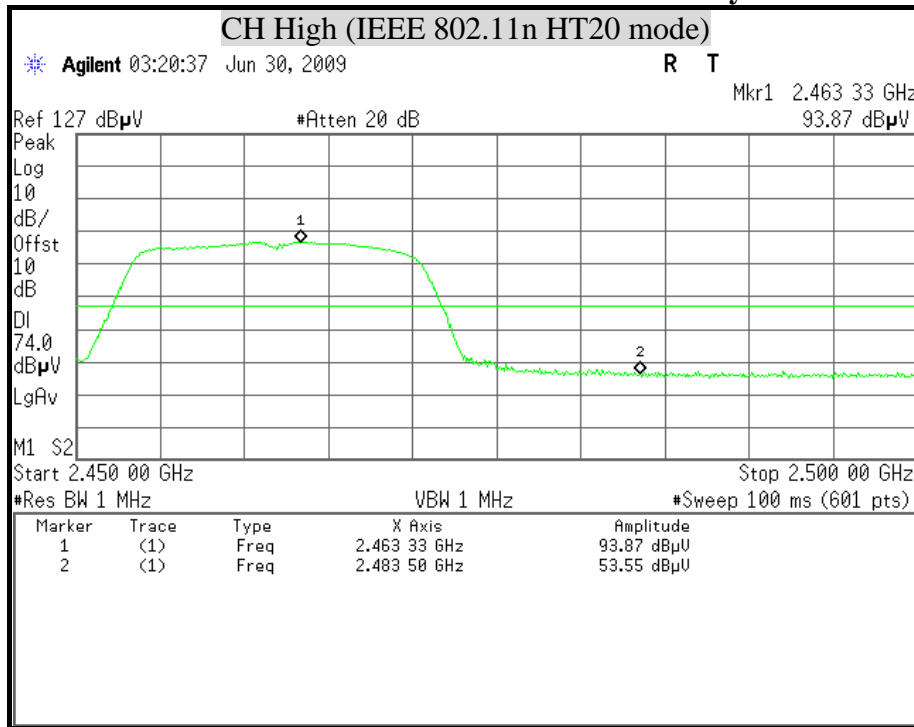

Detector mode : Average


Polarity : Horizontal

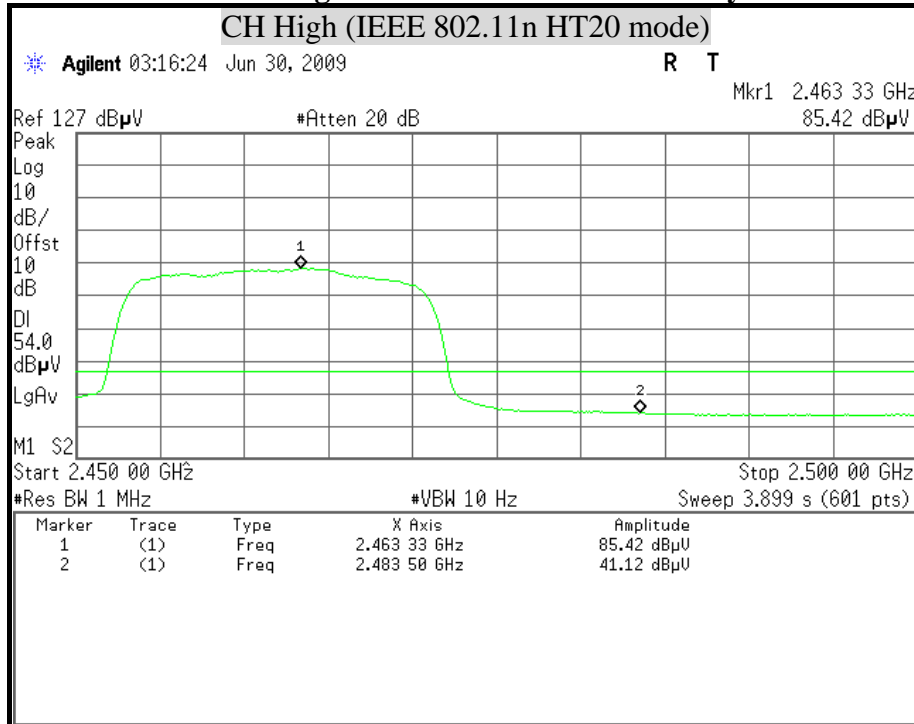




Detector mode : Peak

Polarity : Vertical

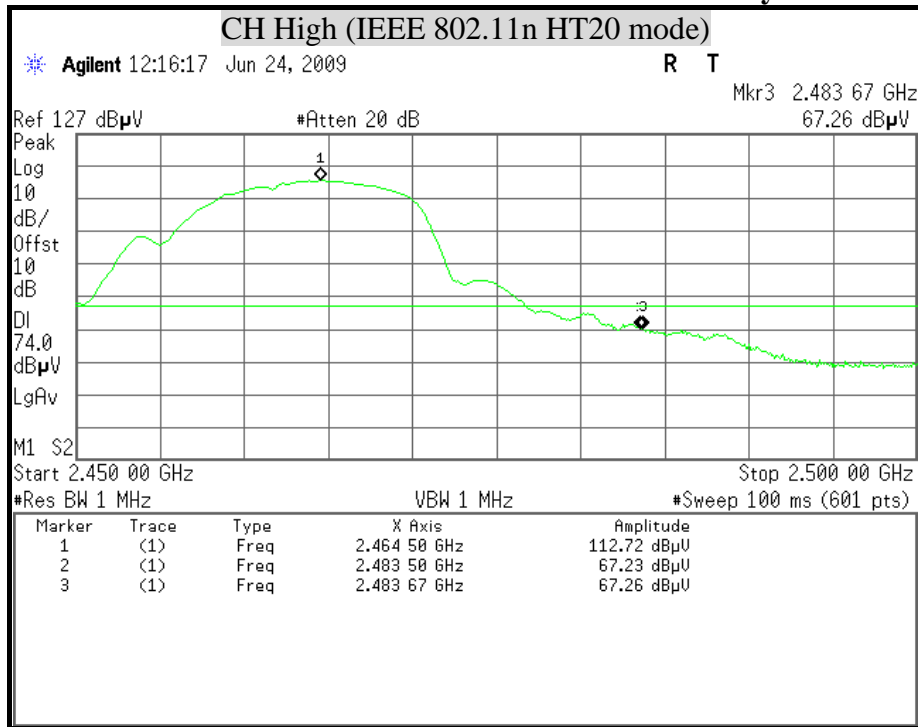

Detector mode : Average


Polarity : Vertical

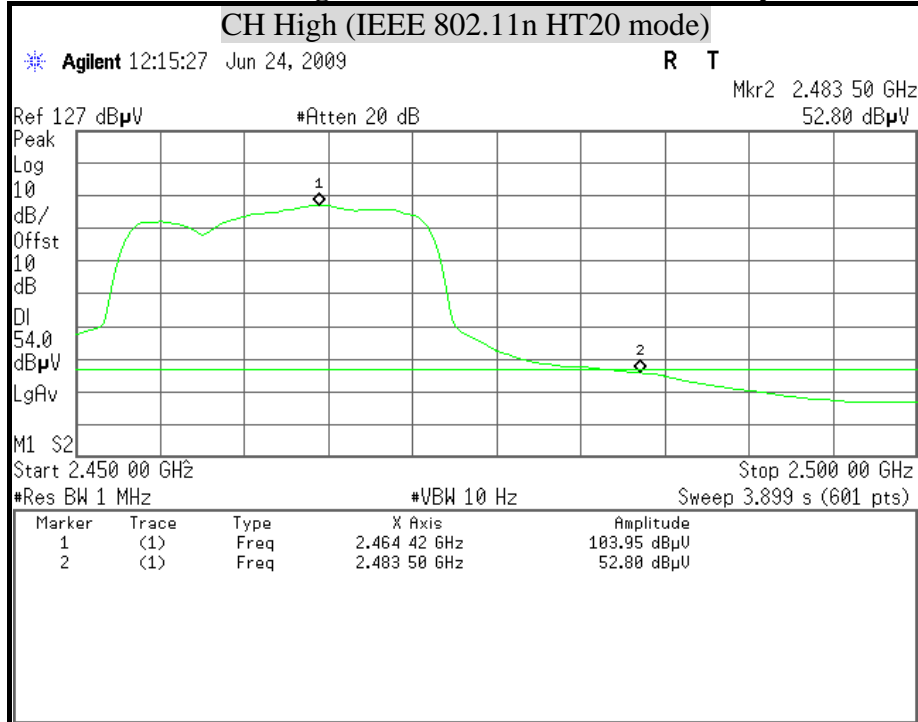




Detector mode : Peak

Polarity : Horizontal

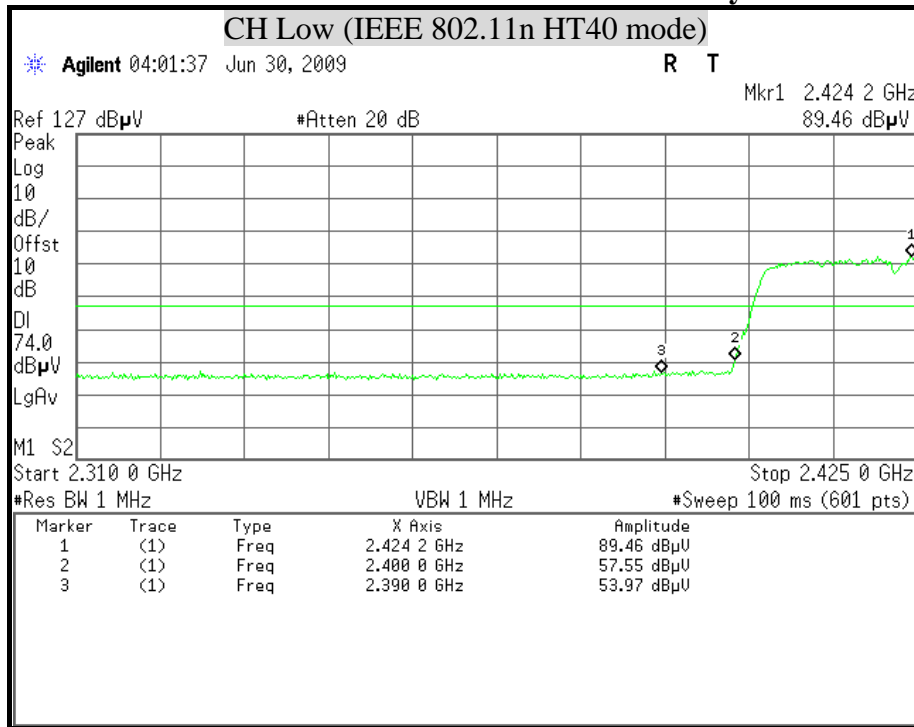

Detector mode : Average


Polarity : Horizontal

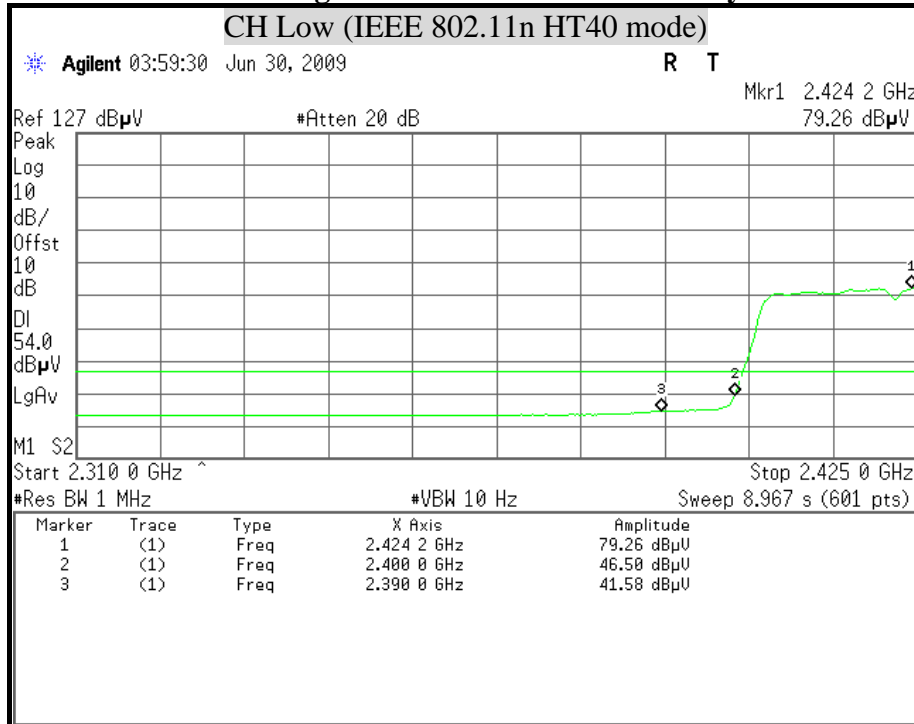




Detector mode : Peak

Polarity : Vertical

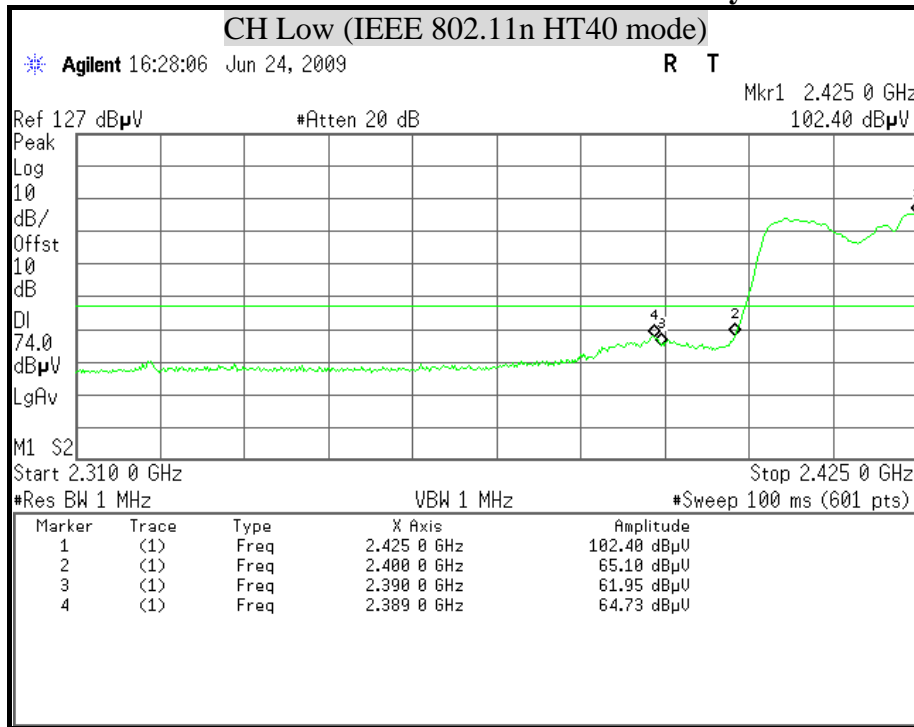

Detector mode : Average


Polarity : Vertical

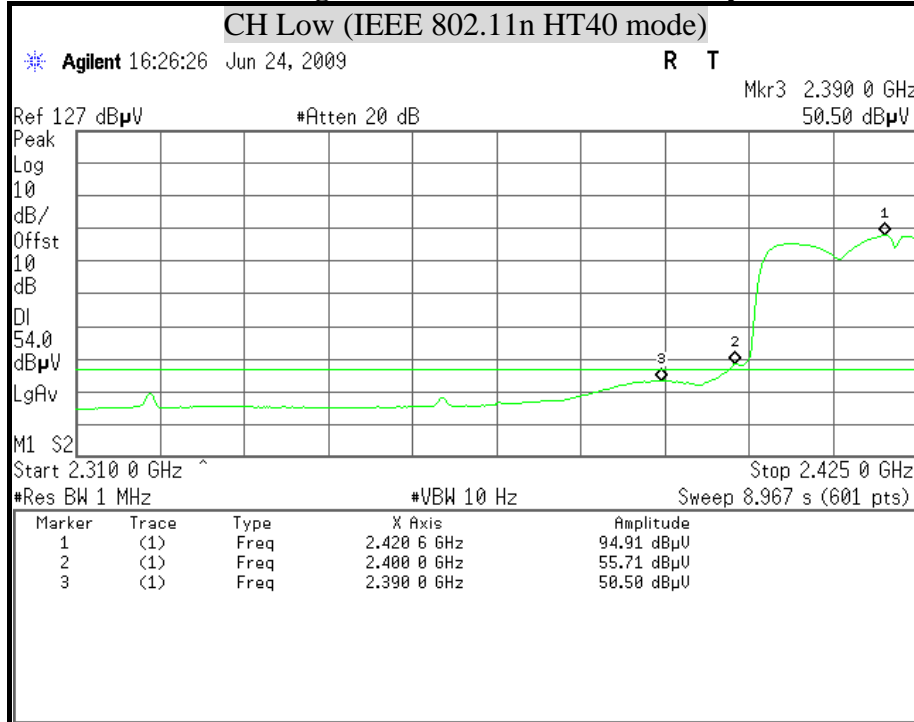




Detector mode : Peak

Polarity : Horizontal

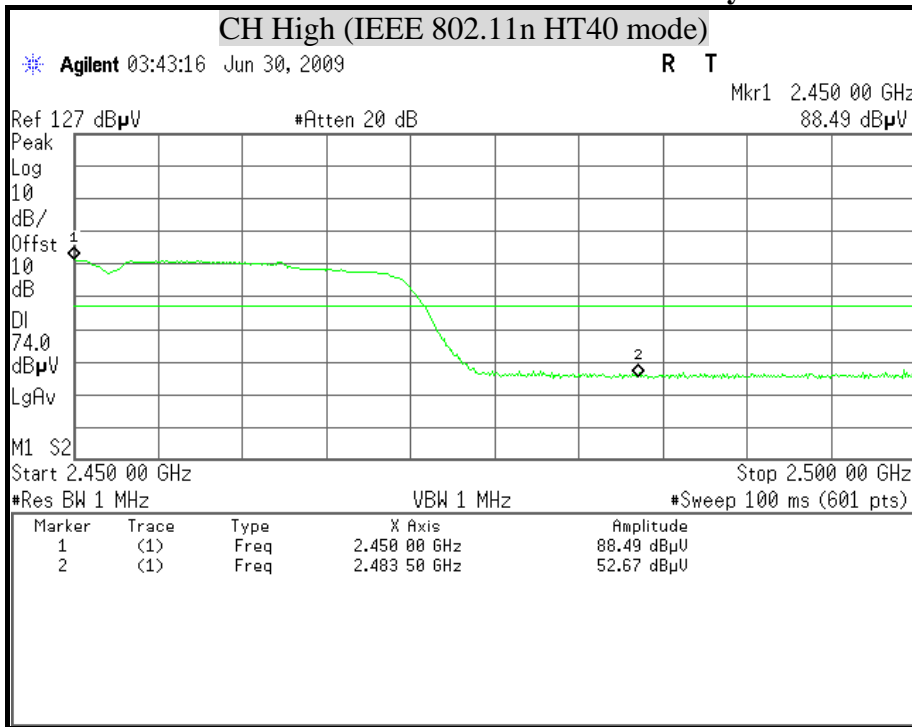

Detector mode : Average


Polarity : Horizontal

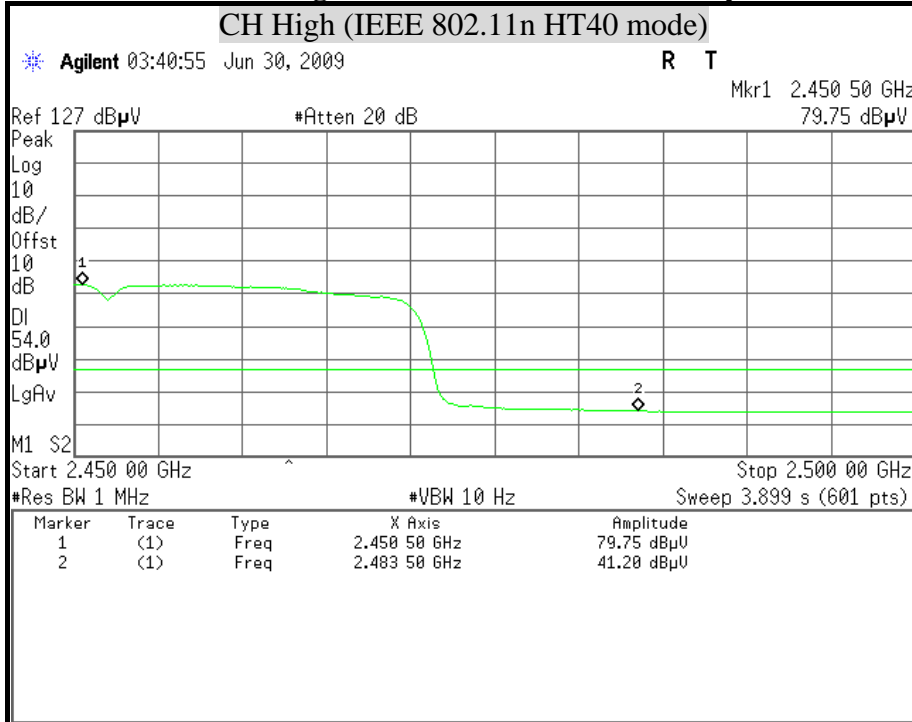




Detector mode : Peak

Polarity : Vertical

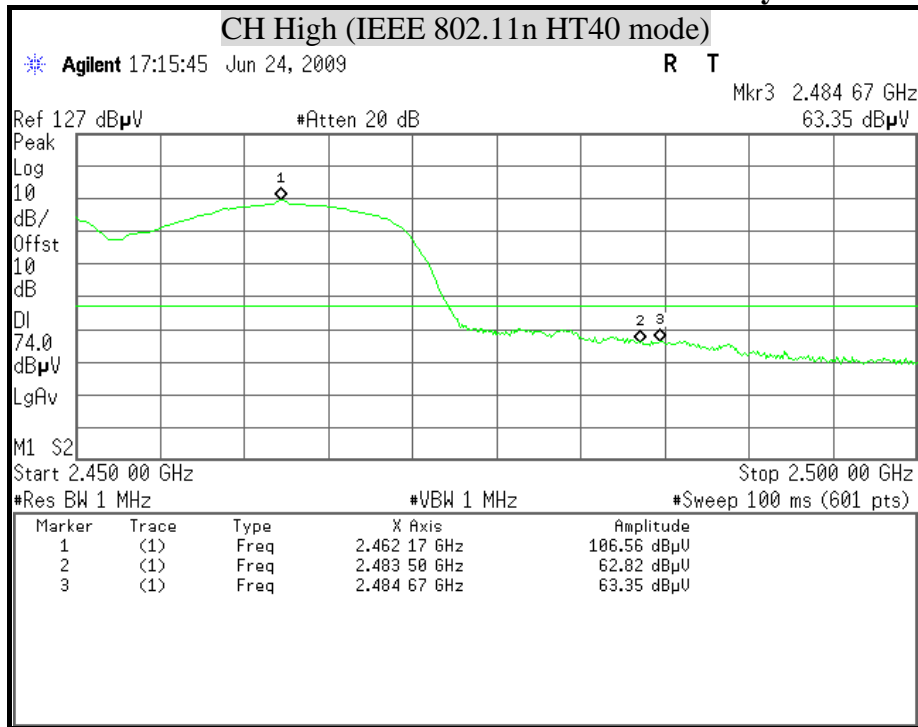

Detector mode : Average

Polarity : Vertical

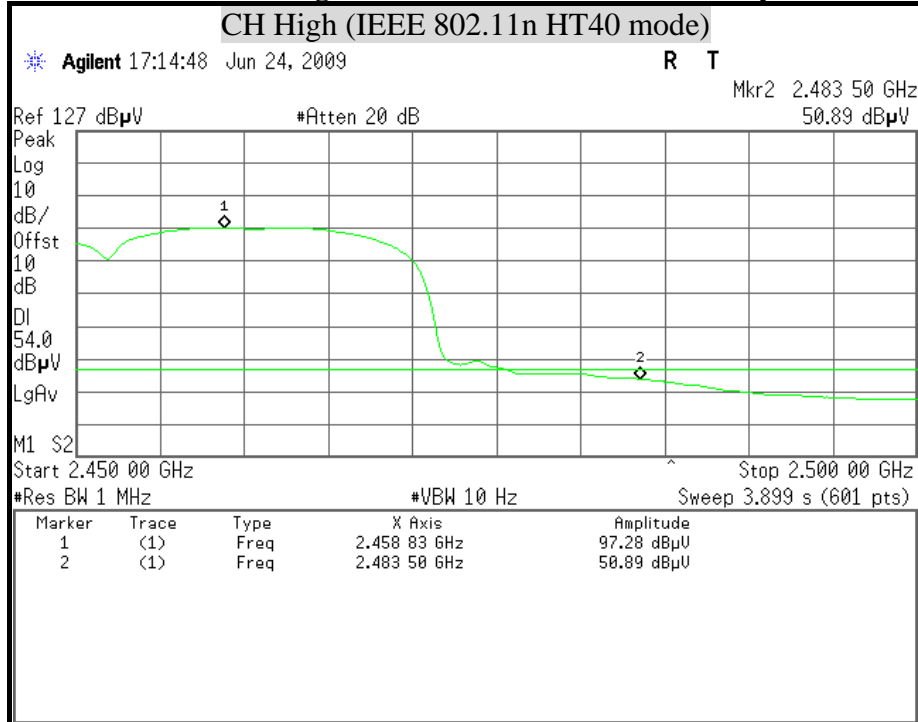



8.9 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50


TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/13/2009
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	10/12/2009
TEST RECEIVER	R & S	ESHS30	838550/003	02/02/2010
PULSE LIMIT	R & S	ESH3-Z2	100117	09/23/2009
N TYPE COAXIAL CABLE	BELDEN	8268 M17/164	003	09/13/2009

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST SETUP

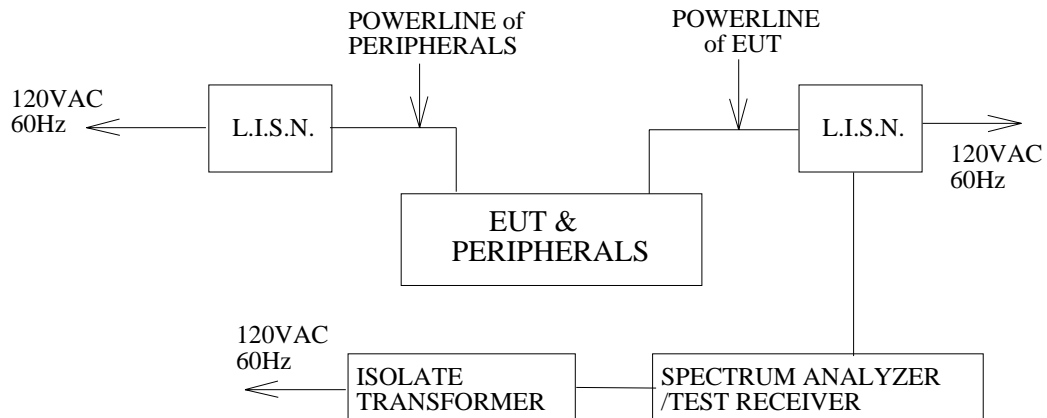

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4:2003.


The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

**TEST RESULTS**

Product Name	Wireless N Router	Test Date	2009/07/01
Model	DIR-615	Test By	Kenghao Hu
Test Mode	Normal operating (worst-case) Power Adapter (1)	TEMP & Humidity	22.8°C, 56%

LINE

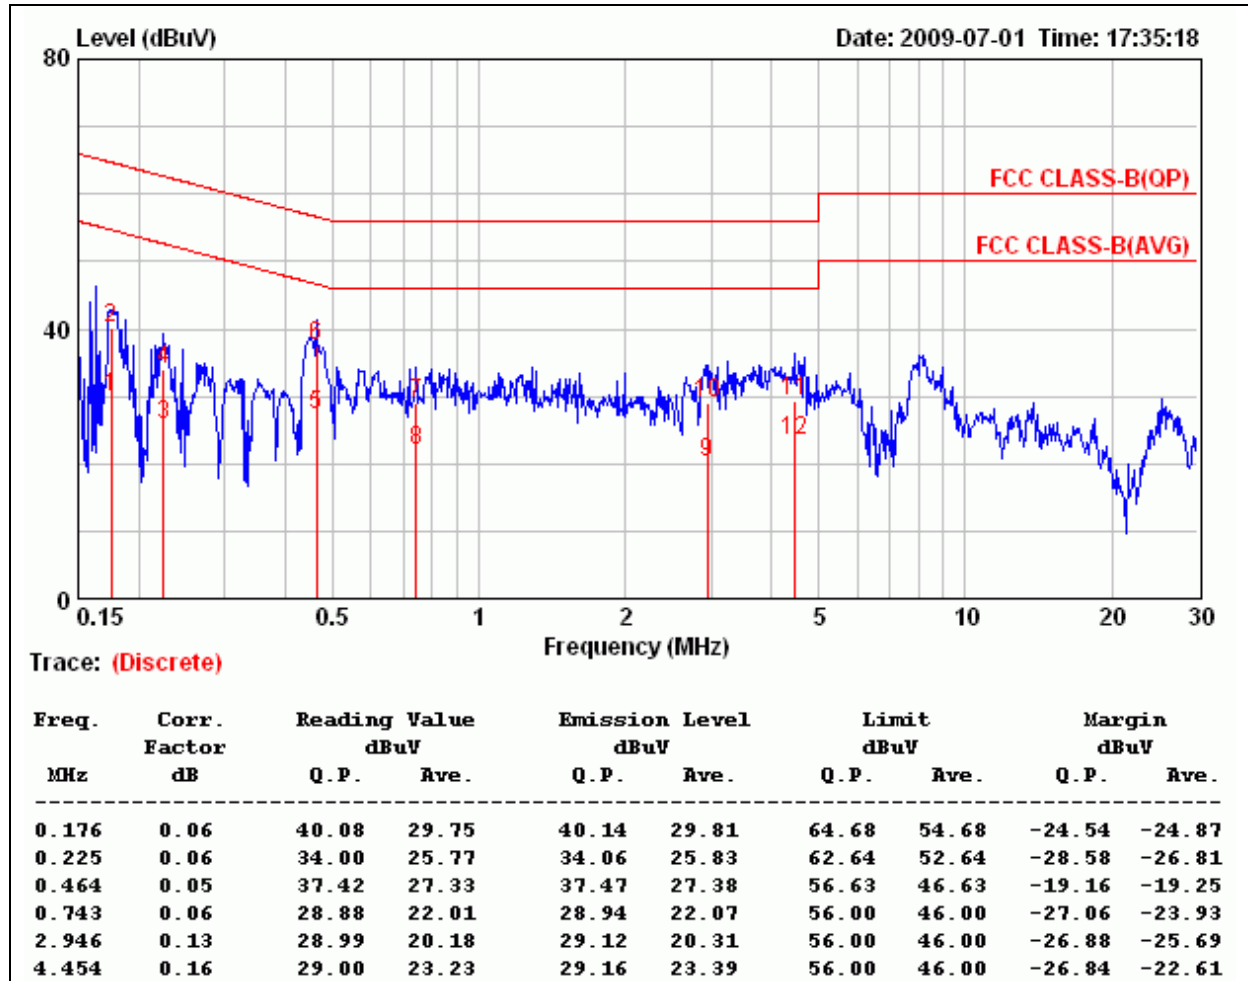
**Remark:**

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level - Limit value



Product Name	Wireless N Router	Test Date	2009/07/01
Model	DIR-615	Test By	Kenghao Hu
Test Mode	Normal operating (worst-case) Power Adapter (1)	TEMP & Humidity	22.8°C, 56%

NEUTRAL

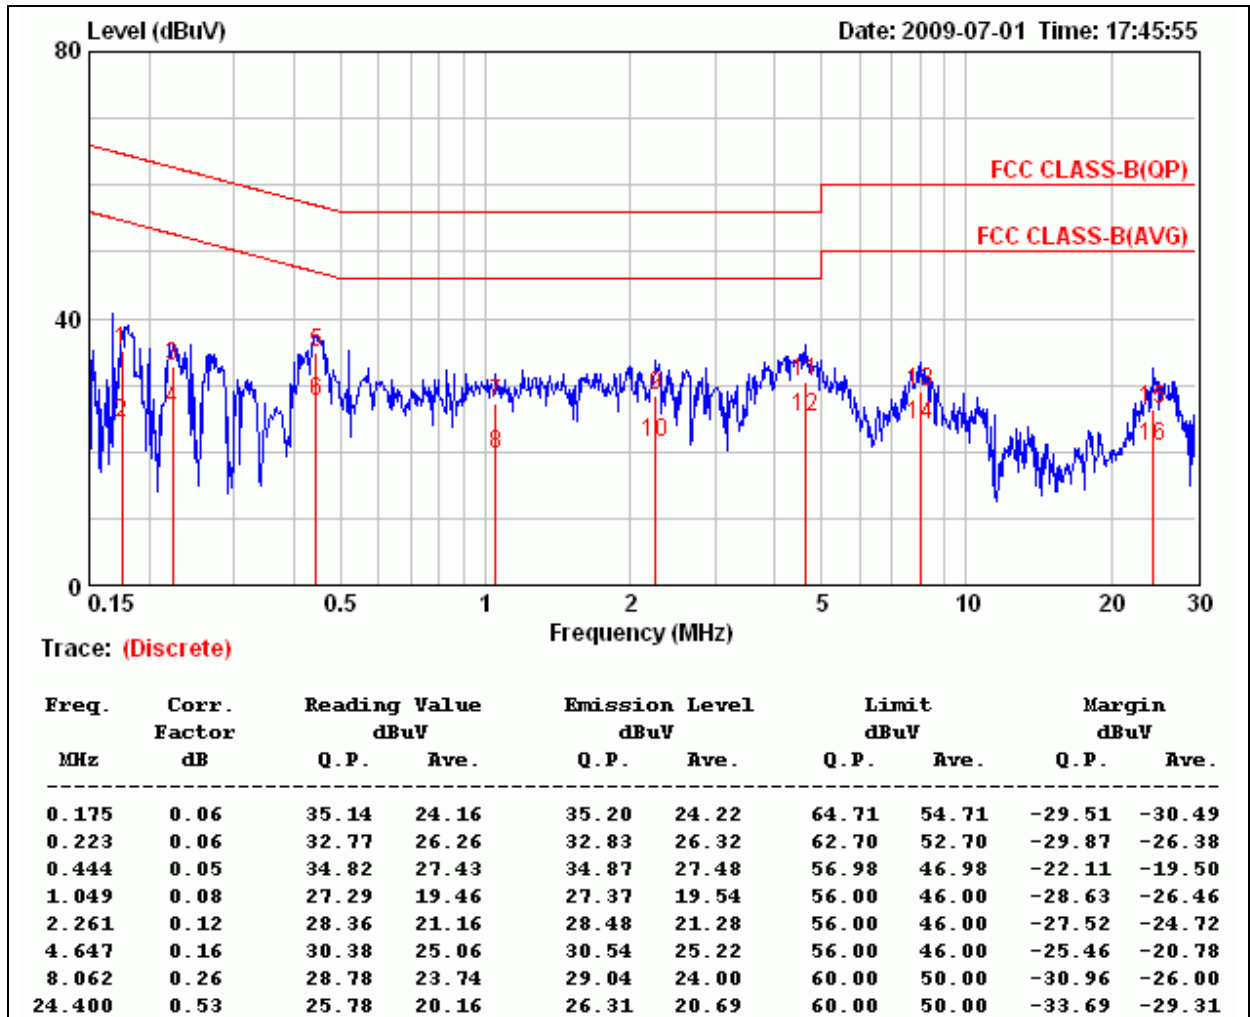


Remark:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level - Limit value



Product Name	Wireless N Router	Test Date	2009/07/01
Model	DIR-615	Test By	Kenghao Hu
Test Mode	Normal operating (worst-case) Power Adapter (2)	TEMP & Humidity	22.8°C, 56%

LINE

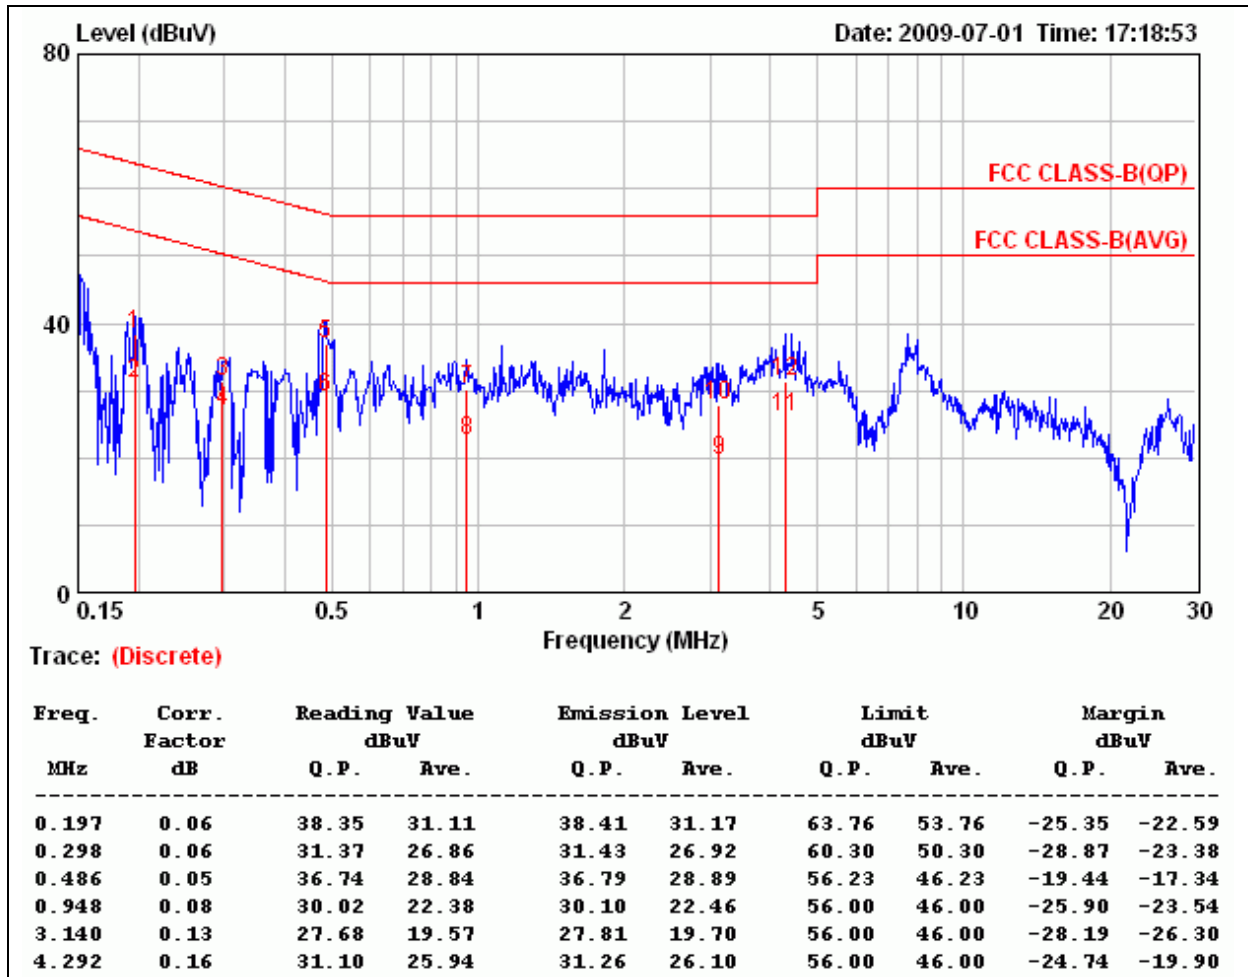


Remark:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	Wireless N Router	Test Date	2009/07/01
Model	DIR-615	Test By	Kenghao Hu
Test Mode	Normal operating (worst-case) Power Adapter (2)	TEMP & Humidity	22.8°C, 56%

NEUTRAL

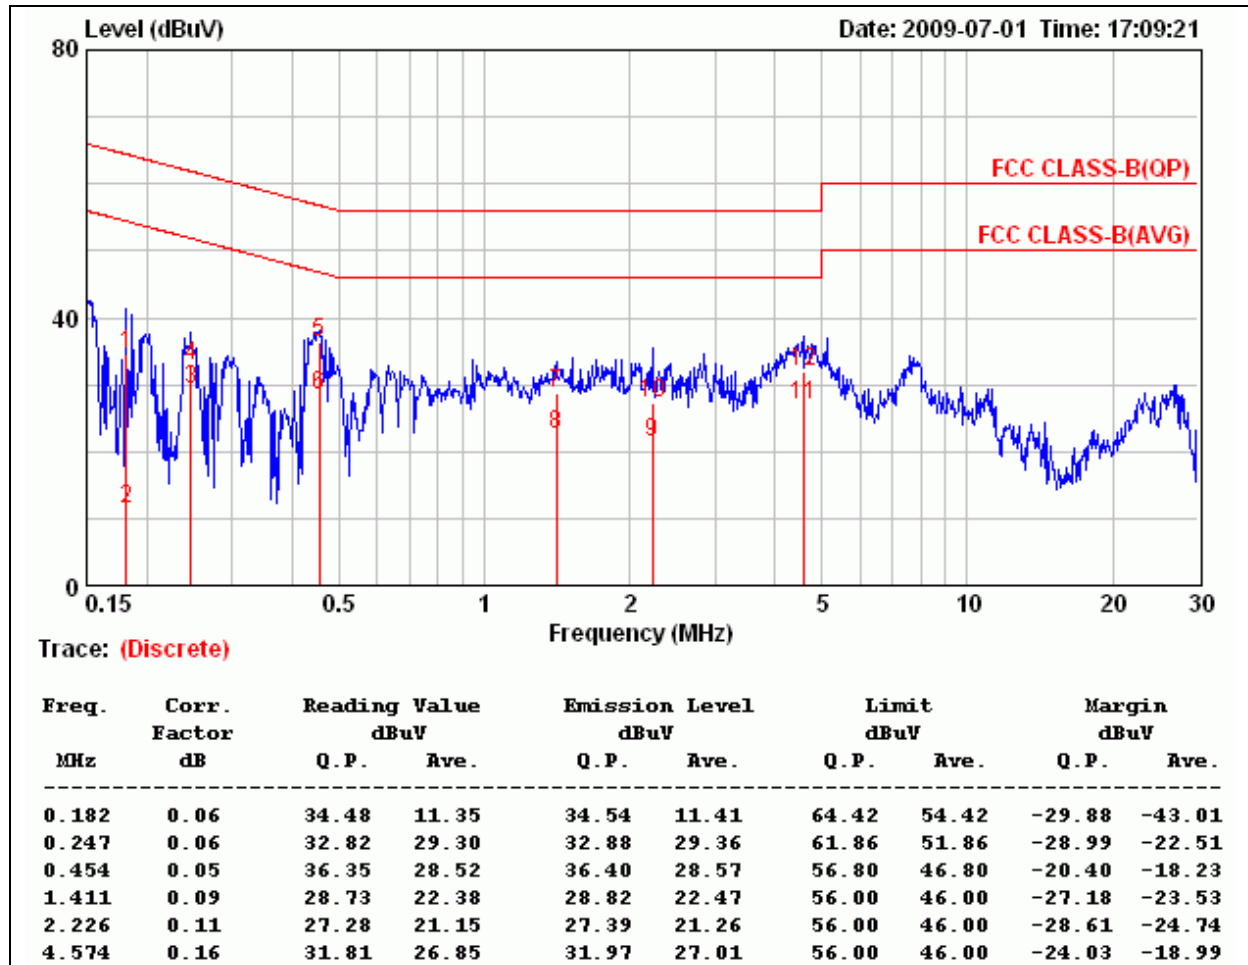**Remark:**

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value