



FCC TEST REPORT (15.407)

REPORT NO.: RF970312L14-1

MODEL NO.: DIR-855

RECEIVED: Mar. 13, 2008

TESTED: Apr. 11 ~ Apr. 21, 2008

ISSUED: May 05, 2008

APPLICANT: D-Link Corporation

ADDRESS: 17595 Mt. Herrmann, Fountain Valley, CA
92708, U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No.47, 14th Ling, Chia Pau Tsuen, Linko Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 102 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3.	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS	12
4.	TEST TYPES AND RESULTS	13
4.1	RADIATED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	13
4.1.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	14
4.1.3	TEST INSTRUMENTS.....	15
4.1.4	TEST PROCEDURES	16
4.1.5	DEVIATION FROM TEST STANDARD.....	16
4.1.6	TEST SETUP.....	17
4.1.7	EUT OPERATING CONDITION.....	17
4.1.8	TEST RESULTS	18
4.2	CONDUCTED EMISSION MEASUREMENT	27
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	27
4.2.2	TEST INSTRUMENTS.....	27
4.2.3	TEST PROCEDURES	28
4.2.4	DEVIATION FROM TEST STANDARD.....	28
4.2.5	TEST SETUP.....	29
4.2.6	EUT OPERATING CONDITIONS	29
4.2.7	TEST RESULTS	30
4.3	PEAK TRANSMIT POWER MEASUREMENT	32
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	32
4.3.2	TEST INSTRUMENTS.....	32
4.3.3	TEST PROCEDURE.....	32
4.3.4	DEVIATION FROM TEST STANDARD.....	33
4.3.5	TEST SETUP.....	33
4.3.6	EUT OPERATING CONDITIONS	33
4.3.7	TEST RESULTS	34
4.4	PEAK POWER EXCURSION MEASUREMENT	56
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	56
4.4.2	TEST INSTRUMENTS.....	56
4.4.3	TEST PROCEDURE.....	56
4.4.4	DEVIATION FROM TEST STANDARD.....	57
4.4.5	TEST SETUP.....	57



4.4.6	EUT OPERATING CONDITIONS	57
4.4.7	TEST RESULTS	58
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	69
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	69
4.5.2	TEST INSTRUMENTS.....	69
4.5.3	TEST PROCEDURES	69
4.5.4	DEVIATION FROM TEST STANDARD.....	70
4.5.5	TEST SETUP	70
4.5.6	EUT OPERATING CONDITIONS	70
4.5.7	TEST RESULTS	71
4.6	FREQUENCY STABILITY.....	82
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	82
4.6.2	TEST INSTRUMENTS.....	82
4.6.3	TEST PROCEDURE.....	82
4.6.4	DEVIATION FROM TEST STANDARD.....	83
4.6.5	TEST SETUP	83
4.6.6	EUT OPERATING CONDITION.....	83
4.6.7	TEST RESULTS	84
4.7	BAND EDGES MEASUREMENT	85
4.7.1	TEST INSTRUMENTS.....	85
4.7.2	TEST PROCEDURE.....	86
4.7.3	EUT OPERATING CONDITION.....	86
4.7.4	TEST RESULTS	87
4.8	ANTENNA REQUIREMENT	99
4.8.1	STANDARD APPLICABLE	99
4.8.2	ANTENNA CONNECTED CONSTRUCTION	99
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	100
6.	INFORMATION ON THE TESTING LABORATORIES	101
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	102



1. CERTIFICATION

PRODUCT: Xtreme N DUO MEDIA ROUTER

MODEL: DIR-855

BRAND: D-Link

APPLICANT: D-Link Corporation

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Apr. 11 ~ Apr. 21, 2008

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.4-2003

The above equipment (Model: DIR-855) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Rennie Wang , **DATE:** May 05, 2008
Rennie Wang / Senior Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** May 05, 2008
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** May 05, 2008
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.59dB at 0.154MHz.
15.407(b)(1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -1.53dB at 624.85MHz.
15.407(a)(1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44dB
Radiated emissions	30MHz ~ 200MHz	2.93dB
	200MHz ~ 1000MHz	2.95dB
	1GHz ~ 18GHz	2.26dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Xtreme N DUO MEDIA ROUTER
MODEL NO.	DIR-855
FCC ID	KA2DIR855A2
POWER SUPPLY	12Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 270.0Mbps
FREQUENCY RANGE	2.4GHz: 2400.0 ~ 2483.5MHz 5.0GHz: 5150.0 ~ 5250.0MHz, 5725.0 ~ 5850.0MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz) 5.0GHz: 9 for 802.11a, draft 802.11n (20MHz) 4 for draft 802.11n (40MHz)
OUTPUT POWER	64.269mW for 2400.0 ~ 2483.5MHz 36.428mW for 5150.0 ~ 5250.0MHz 119.018mW for 5725.0 ~ 5850.0MHz
ANTENNA TYPE	2.4GHz: Dipole antenna with 2.0dBi gain 5.0GHz: Dipole antenna with 2.0dBi gain
DATA CABLE	NA
I/O PORTS	RJ45, USB
ASSOCIATED DEVICES	Adapter

NOTE:

- The EUT is a Xtreme N DUO MEDIA ROUTER. The functions of EUT listed as below:

	TEST STANDARD	REFERENCE REPORT
WLAN 802.11b/g, draft 802.11n	FCC Part 15, Subpart C (Section 15.247)	RF970312L14
WLAN 802.11a, draft 802.11n (5725~5850 MHz)		
WLAN 802.11a, draft 802.11n (5150~ 5250MHz)	FCC Part 15, Subpart E (Section 15.407)	RF970312L14-1

2. The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	2400~2483.5	5150~5250	5725~5850
802.11b	√		
802.11g	√		
802.11a		√	√
Draft 802.11n (20MHz)	√	√	√
Draft 802.11n (40MHz)	√	√	√

3. The EUT was powered by the following adapter:

BRAND:	D-Link
MODEL:	AG2412-B
INPUT:	100-240Vac, 50-60Hz, 0.5A
OUTPUT:	12Vdc, 2A
POWER LINE:	1.8m non-shielded cable without core

4. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11a	1TX
Draft 802.11n (20MHz)	3TX
Draft 802.11n (40MHz)	3TX

5. The EUT with following module cards:

ITEM	MODULE CARDS
A	With 802.11b, 802.11g, and 802.11n function
B	With 802.11a, 802.11b, 802.11g and 802.11n function

**For the module cards B, all the function of 2.4GHz will be closed by software.

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


4 channels are provided for 802.11a, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190MHz	46	5230MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

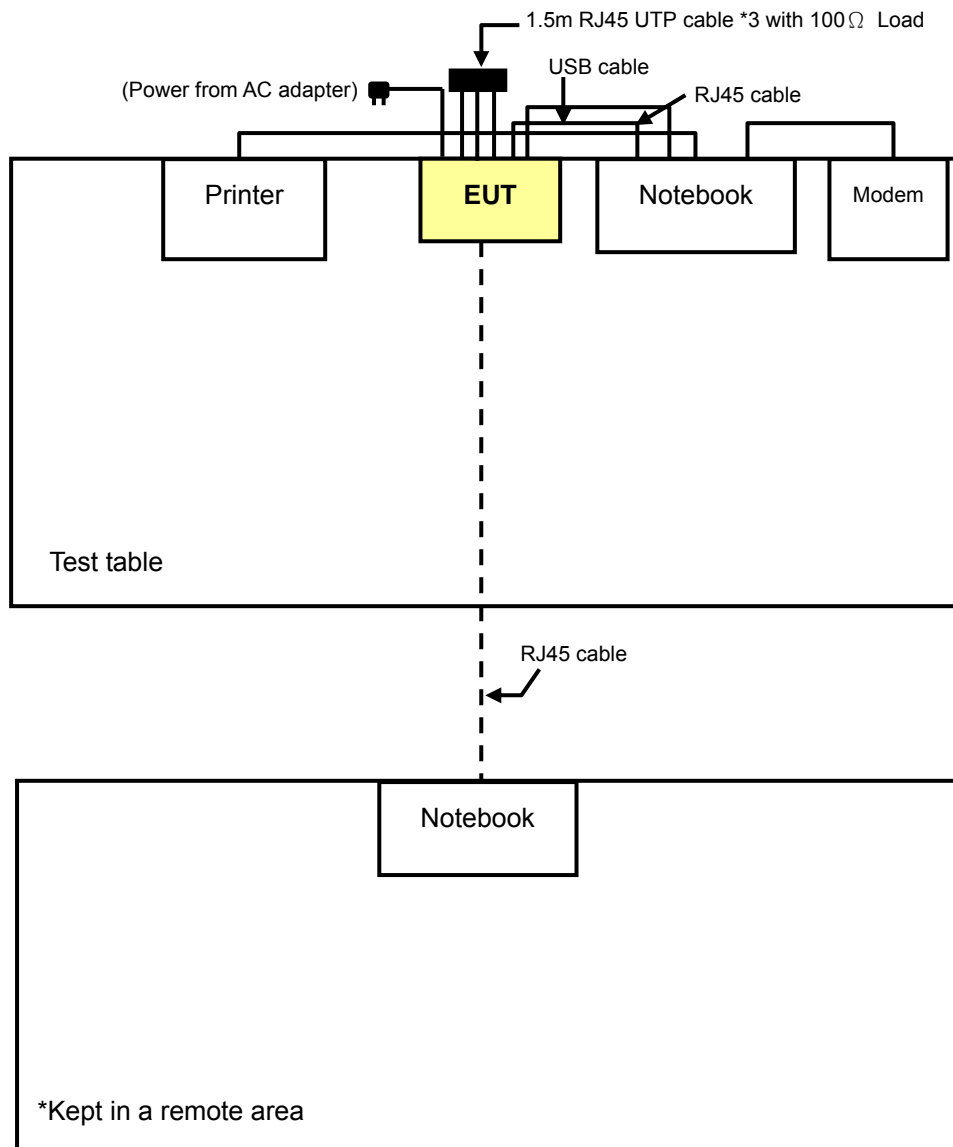

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0
Draft 802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
Draft 802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13.5

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
Draft 802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13.5

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 48	OFDM	BPSK	6.0
Draft 802.11n (20MHz)	36 to 48	36, 48	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0
Draft 802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
3	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
4	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	3m UTP RJ 45 cable
2	10m UTP RJ 45 cable
3	1.8m braid shielded wire , DB25 connector , w/o core.
4	1.2m braid shielded wire , DB25 & DB9 connector , w/o core.

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 2 acted as communication partners to transfer data.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

FREQUENCIES (MHz)	EIRP LIMIT (dBm)		EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m) *NOTE 3	
	PK	AV	PK	AV
5150 ~ 5250	-7	-27	88.3	68.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).$$



4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Jul. 27, 2008
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 05, 2008
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 03, 2009
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 30, 2008
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01910	Sep. 19, 2008
Preamplifier Agilent	8447D	2944A10638	Dec. 19, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274039/223650	Nov. 07, 2008
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Apr. 23, 2008

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 215374.
 5. The IC Site Registration No. is IC3789B-9.

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (for 802.11a), 1kHz (for draft 802.11n) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD

No deviation

4.1.6 TEST SETUP

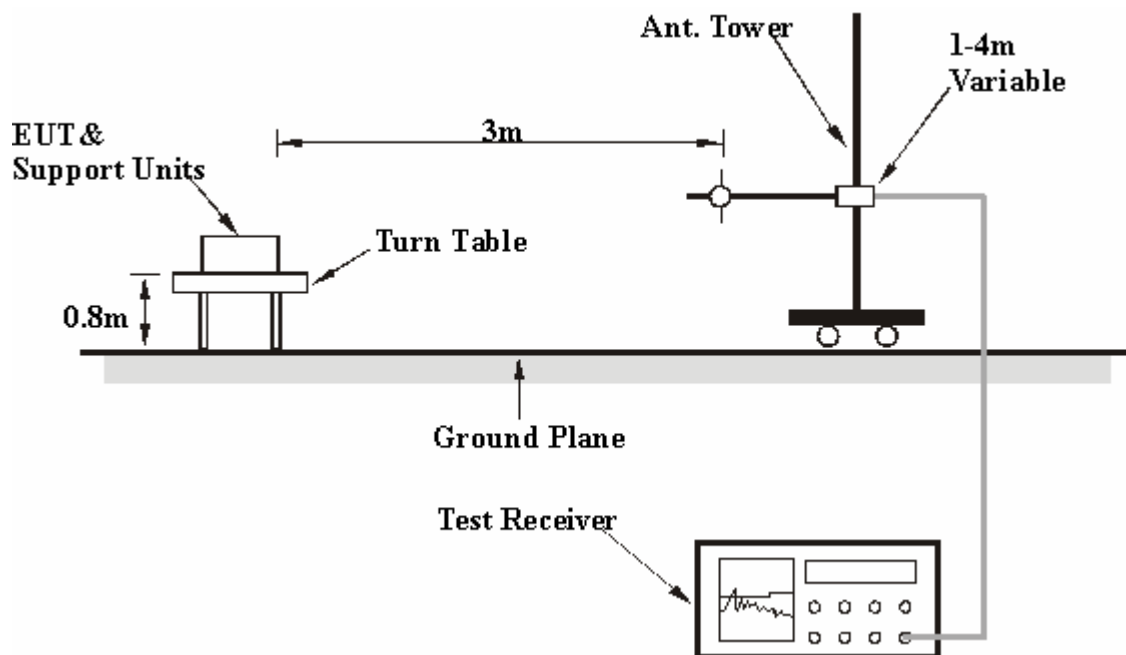

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- Placed the EUT on the testing table.
- The necessary accessories enable the system in full functions.
- Prepared the other notebook outside of testing area to act as a communication partner.
- The communication partner connected with EUT via a UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.8 TEST RESULTS

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	47.75 PK	74.00	-26.25	1.14 H	314	19.68	28.08
2	#1125.00	42.92 AV	54.00	-11.08	1.14 H	314	14.84	28.08
3	#5150.00	46.31 PK	74.00	-27.69	1.00 H	240	7.72	38.59
4	#5150.00	34.84 AV	54.00	-19.16	1.00 H	240	-3.75	38.59
5	*5180.00	95.11 PK			1.00 H	240	56.47	38.64
6	*5180.00	84.63 AV			1.00 H	240	45.99	38.64
7	6906.00	52.82 PK	88.30	-35.48	1.29 H	0	9.64	43.18
8	6906.00	39.84 AV	68.30	-28.46	1.29 H	0	-3.34	43.18
9	10360.00	58.07 PK	88.30	-30.23	1.08 H	34	9.37	48.70
10	10360.00	44.89 AV	68.30	-23.41	1.08 H	34	-3.81	48.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	57.23 PK	74.00	-16.77	1.00 V	5	29.16	28.08
2	#1125.00	51.24 AV	54.00	-2.76	1.00 V	5	23.16	28.08
3	#5150.00	51.81 PK	74.00	-22.19	1.16 V	194	13.22	38.59
4	#5150.00	36.50 AV	54.00	-17.50	1.16 V	194	-2.09	38.59
5	*5180.00	105.50 PK			1.16 V	194	66.86	38.64
6	*5180.00	95.17 AV			1.16 V	194	56.53	38.64
7	6906.00	53.28 PK	88.30	-35.02	1.00 V	11	10.10	43.18
8	6906.00	42.81 AV	68.30	-25.49	1.00 V	11	-0.37	43.18
9	10360.00	58.12 PK	88.30	-30.18	1.05 V	258	9.42	48.70
10	10360.00	45.02 AV	68.30	-23.28	1.05 V	258	-3.68	48.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	47.68 PK	74.00	-26.32	1.11 H	302	19.60	28.08
2	#1125.00	42.87 AV	54.00	-11.13	1.11 H	302	14.79	28.08
3	*5200.00	97.27 PK			1.00 H	243	58.60	38.67
4	*5200.00	86.02 AV			1.00 H	243	47.35	38.67
5	6933.00	52.79 PK	88.30	-35.51	1.03 H	166	9.47	43.32
6	6933.00	39.78 AV	68.30	-28.52	1.03 H	166	-3.54	43.32
7	10400.00	57.89 PK	88.30	-30.41	1.00 H	167	9.12	48.77
8	10400.00	44.65 AV	68.30	-23.65	1.00 H	167	-4.12	48.77
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	56.96 PK	74.00	-17.04	1.00 V	5	28.88	28.08
2	#1125.00	51.16 AV	54.00	-2.84	1.00 V	5	23.09	28.08
3	*5200.00	106.35 PK			1.01 V	297	67.68	38.67
4	*5200.00	95.57 AV			1.01 V	297	56.90	38.67
5	6933.00	52.74 PK	88.30	-35.56	1.00 V	10	9.42	43.32
6	6933.00	42.39 AV	68.30	-25.91	1.00 V	10	-0.93	43.32
7	10400.00	58.04 PK	88.30	-30.26	1.02 V	175	9.27	48.77
8	10400.00	44.76 AV	68.30	-23.54	1.02 V	175	-4.01	48.77

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “ # “: The radiated frequency falling in the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	95.08 PK			1.01 H	235	56.37	38.71
2	*5240.00	84.59 AV			1.01 H	235	45.88	38.71
3	#5350.00	49.58 PK	74.00	-24.42	1.01 H	235	10.77	38.81
4	#5350.00	36.52 AV	54.00	-17.48	1.01 H	235	-2.29	38.81
5	10480.00	57.68 PK	88.30	-30.62	1.00 H	102	8.67	49.01
6	10480.00	46.00 AV	68.30	-22.30	1.00 H	102	-3.01	49.01
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	57.16 PK	74.00	-16.84	1.00 V	6	29.08	28.08
2	#1125.00	51.10 AV	54.00	-2.90	1.00 V	6	23.02	28.08
3	*5240.00	105.12 PK			1.00 V	299	66.41	38.71
4	*5240.00	94.84 AV			1.00 V	299	56.13	38.71
5	#5350.00	49.67 PK	74.00	-24.33	1.00 V	299	10.86	38.81
6	#5350.00	36.62 AV	54.00	-17.38	1.00 V	299	-2.19	38.81
7	6986.00	53.44 PK	88.30	-34.86	1.67 V	8	9.84	43.60
8	6986.00	43.49 AV	68.30	-24.81	1.67 V	8	-0.11	43.60
9	10480.00	58.20 PK	88.30	-30.10	1.23 V	48	9.19	49.01
10	10480.00	46.27 AV	68.30	-22.03	1.23 V	48	-2.74	49.01

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5150.00	48.52 PK	74.00	-25.48	1.08 H	345	9.93	38.59
2	#5150.00	35.77 AV	54.00	-18.23	1.08 H	345	-2.82	38.59
3	*5180.00	96.86 PK			1.08 H	345	58.22	38.64
4	*5180.00	86.24 AV			1.08 H	345	47.60	38.64
5	10360.00	57.80 PK	88.30	-30.50	1.04 H	276	9.10	48.70
6	10360.00	44.12 AV	68.30	-24.18	1.04 H	276	-4.58	48.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	56.74 PK	74.00	-17.26	1.00 V	2	28.66	28.08
2	#1125.00	50.33 AV	54.00	-3.67	1.00 V	2	22.26	28.08
3	#5150.00	48.60 PK	74.00	-25.40	1.32 V	31	10.01	38.59
4	#5150.00	35.94 AV	54.00	-18.06	1.32 V	31	-2.65	38.59
5	*5180.00	109.86 PK			1.32 V	31	71.22	38.64
6	*5180.00	99.58 AV			1.32 V	31	60.94	38.64
7	6906.00	55.26 PK	88.30	-33.04	1.53 V	42	12.08	43.18
8	6906.00	48.81 AV	68.30	-19.49	1.53 V	42	5.63	43.18
9	10360.00	58.13 PK	88.30	-30.17	1.16 V	50	9.43	48.70
10	10360.00	44.25 AV	68.30	-24.05	1.16 V	50	-4.45	48.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	97.18 PK			1.10 H	289	58.51	38.67
2	*5200.00	87.50 AV			1.10 H	289	48.83	38.67
3	10400.00	57.27 PK	88.30	-31.03	1.00 H	174	8.50	48.77
4	10400.00	44.16 AV	68.30	-24.14	1.00 H	174	-4.61	48.77
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	56.87 PK	74.00	-17.13	1.01 V	4	28.79	28.08
2	#1125.00	51.25 AV	54.00	-2.75	1.01 V	4	23.17	28.08
3	*5200.00	110.22 PK			1.03 V	167	71.55	38.67
4	*5200.00	99.96 AV			1.03 V	167	61.29	38.67
5	6933.00	52.68 PK	88.30	-35.62	1.01 V	163	9.36	43.32
6	6933.00	42.41 AV	68.30	-25.89	1.01 V	163	-0.91	43.32
7	10400.00	57.38 PK	88.30	-30.92	1.30 V	12	8.61	48.77
8	10400.00	44.30 AV	68.30	-24.00	1.30 V	12	-4.47	48.77

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “ # “: The radiated frequency falling in the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	96.79 PK			1.11 H	51	58.08	38.71
2	*5240.00	86.55 AV			1.11 H	51	47.84	38.71
3	#5350.00	49.25 PK	74.00	-24.75	1.11 H	51	10.44	38.81
4	#5350.00	36.58 AV	54.00	-17.42	1.11 H	51	-2.23	38.81
5	10480.00	58.13 PK	88.30	-30.17	1.00 H	206	9.12	49.01
6	10480.00	46.08 AV	68.30	-22.22	1.00 H	206	-2.93	49.01
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	57.13 PK	74.00	-16.87	1.02 V	5	29.05	28.08
2	#1125.00	51.09 AV	54.00	-2.91	1.02 V	5	23.01	28.08
3	*5240.00	109.41 PK			1.46 V	28	70.70	38.71
4	*5240.00	98.89 AV			1.46 V	28	60.18	38.71
5	#5350.00	49.69 PK	74.00	-24.31	1.46 V	28	10.88	38.81
6	#5350.00	36.74 AV	54.00	-17.26	1.46 V	28	-2.07	38.81
7	6986.00	54.16 PK	88.30	-34.14	1.55 V	317	10.56	43.60
8	6986.00	44.60 AV	68.30	-23.70	1.55 V	317	1.00	43.60
9	10480.00	58.45 PK	88.30	-29.85	1.08 V	13	9.44	49.01
10	10480.00	46.34 AV	68.30	-21.96	1.08 V	13	-2.67	49.01

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5150.00	67.85 PK	74.00	-6.15	1.35 H	233	29.26	38.59
2	#5150.00	48.55 AV	54.00	-5.45	1.35 H	233	9.96	38.59
3	*5190.00	94.43 PK			1.35 H	233	55.78	38.65
4	*5190.00	83.29 AV			1.35 H	233	44.64	38.65
5	10380.00	57.79 PK	88.30	-30.51	1.27 H	8	9.05	48.74
6	10380.00	45.23 AV	68.30	-23.07	1.27 H	8	-3.51	48.74

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	57.57 PK	74.00	-16.43	1.01 V	3	29.49	28.08
2	#1125.00	50.62 AV	54.00	-3.38	1.01 V	3	22.54	28.08
3	#5150.00	67.97 PK	74.00	-6.03	1.45 V	37	29.38	38.59
4	#5150.00	48.69 AV	54.00	-5.31	1.45 V	37	10.10	38.59
5	*5190.00	107.13 PK			1.45 V	37	68.48	38.65
6	*5190.00	97.02 AV			1.45 V	37	58.37	38.65
7	6920.00	56.89 PK	88.30	-31.41	1.55 V	41	13.64	43.25
8	6920.00	52.51 AV	68.30	-15.79	1.55 V	41	9.26	43.25
9	10380.00	58.28 PK	88.30	-30.02	1.01 V	267	9.54	48.74
10	10380.00	45.63 AV	68.30	-22.67	1.01 V	267	-3.11	48.74

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	93.76 PK			1.26 H	257	55.06	38.70
2	*5230.00	82.80 AV			1.26 H	257	44.10	38.70
3	#5350.00	46.41 PK	74.00	-27.59	1.26 H	257	7.60	38.81
4	#5350.00	33.49 AV	54.00	-20.51	1.26 H	257	-5.32	38.81
5	10460.00	57.90 PK	88.30	-30.40	1.00 H	31	8.95	48.95
6	10460.00	45.21 AV	68.30	-23.09	1.00 H	31	-3.74	48.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1125.00	57.85 PK	74.00	-16.15	1.00 V	4	29.77	28.08
2	#1125.00	51.38 AV	54.00	-2.62	1.00 V	4	23.30	28.08
3	*5230.00	106.98 PK			1.29 V	46	68.28	38.70
4	*5230.00	96.37 AV			1.29 V	46	57.67	38.70
5	#5350.00	46.43 PK	74.00	-27.57	1.29 V	46	7.62	38.81
6	#5350.00	33.58 AV	54.00	-20.42	1.29 V	46	-5.23	38.81
7	6972.00	57.66 PK	88.30	-30.64	1.30 V	352	14.14	43.52
8	6972.00	52.59 AV	68.30	-15.71	1.30 V	352	9.07	43.52
9	10460.00	58.42 PK	88.30	-29.88	1.01 V	166	9.47	48.95
10	10460.00	45.68 AV	68.30	-22.62	1.01 V	166	-3.27	48.95

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.



BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 70%RH 993hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	374.04	39.99 QP	46.00	-6.01	1.00 H	301	24.61	15.37
2	500.42	44.35 QP	46.00	-1.65	1.50 H	166	25.24	19.12
3	624.85	44.47 QP	46.00	-1.53	1.25 H	253	22.72	21.75
4	799.84	38.24 QP	46.00	-7.76	1.00 H	262	13.31	24.92
5	834.84	36.84 QP	46.00	-9.16	1.00 H	265	11.59	25.25
6	875.67	40.60 QP	46.00	-5.40	1.50 H	211	14.97	25.62
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	183.50	34.31 QP	43.50	-9.19	1.00 V	316	22.35	11.96
2	374.04	37.52 QP	46.00	-8.48	1.00 V	250	22.14	15.37
3	500.42	42.99 QP	46.00	-3.01	1.00 V	121	23.88	19.12
4	624.85	41.83 QP	46.00	-4.17	1.50 V	214	20.09	21.75
5	875.67	42.15 QP	46.00	-3.85	1.00 V	271	16.53	25.62
6	933.99	38.09 QP	46.00	-7.91	1.25 V	331	11.92	26.17

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 21, 2008
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2009
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May 07, 2008
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.


4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

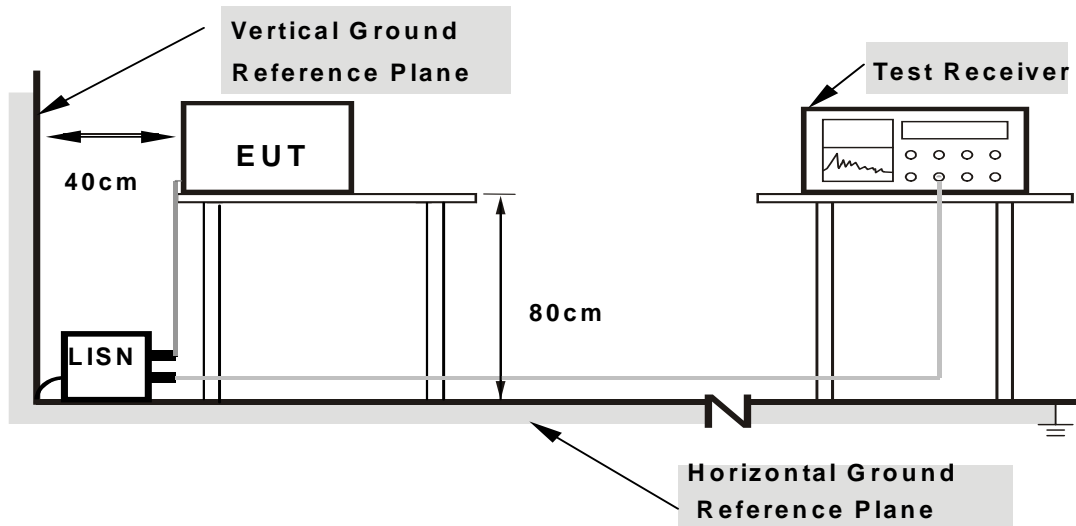

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	13.5Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 982hPa	TESTED BY	Lori Chiu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	59.10	48.66	59.20	48.76	65.79	55.79	-6.59	-7.03
2	0.205	0.10	50.66	-	50.76	-	63.42	53.42	-12.66	-
3	0.255	0.10	44.63	-	44.73	-	61.58	51.58	-16.85	-
4	0.412	0.10	42.05	-	42.15	-	57.61	47.61	-15.46	-
5	3.871	0.28	24.25	-	24.53	-	56.00	46.00	-31.47	-
6	17.059	0.52	17.51	-	18.03	-	60.00	50.00	-41.97	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

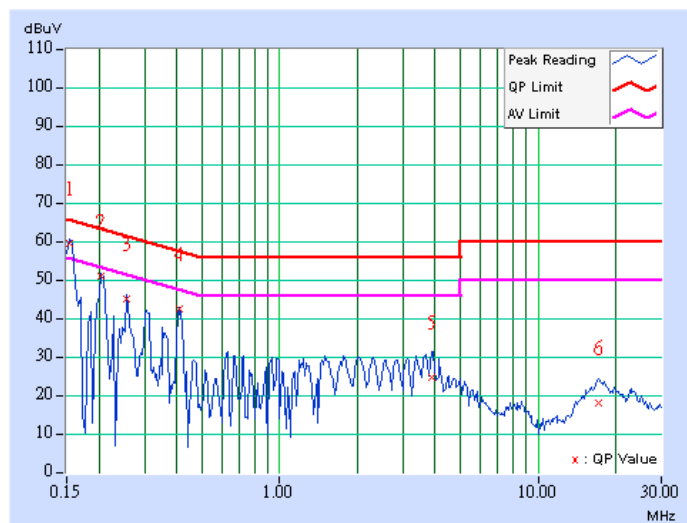

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	13.5Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 982hPa	TESTED BY	Lori Chiu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	58.46	48.17	58.56	48.27	65.79	55.79	-7.23	-7.52
2	0.205	0.10	50.40	-	50.50	-	63.42	53.42	-12.92	-
3	0.259	0.10	43.07	-	43.17	-	61.45	51.45	-18.28	-
4	0.412	0.10	37.90	-	38.00	-	57.61	47.61	-19.61	-
5	3.961	0.28	25.29	-	25.57	-	56.00	46.00	-30.43	-
6	16.266	0.50	18.38	-	18.88	-	60.00	50.00	-41.12	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

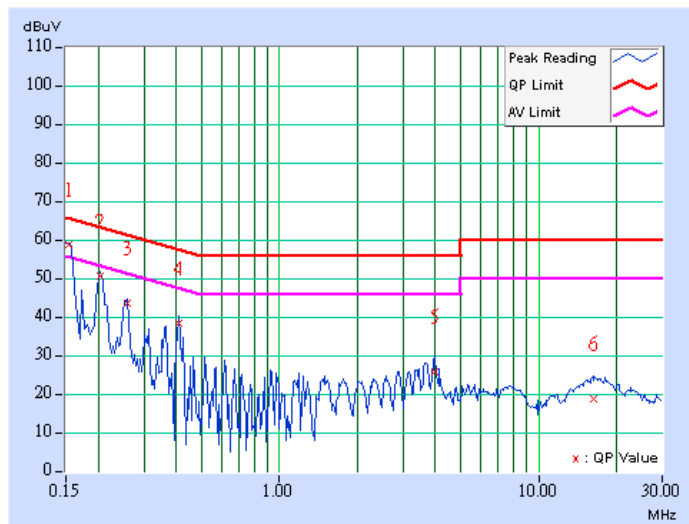



4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set span to encompass the entire emission bandwidth of the signal.
- c. Set RBW to 1MHz, VBW to 3MHz.
- d. Using the spectrum analyzer's channel power measurement function to measure the output power.


NOTE: The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

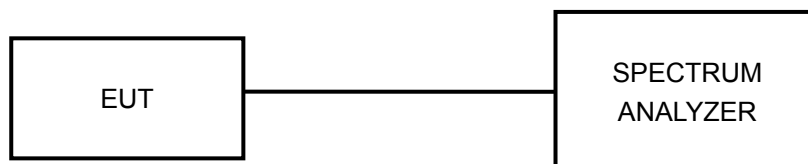

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.3.7 TEST RESULTS

PEAK POWER OUTPUT: 802.11a OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
36	5180	26.062	14.16	17.00	PASS
40	5200	27.990	14.47	17.00	PASS
48	5240	25.882	14.13	17.00	PASS


CH 36

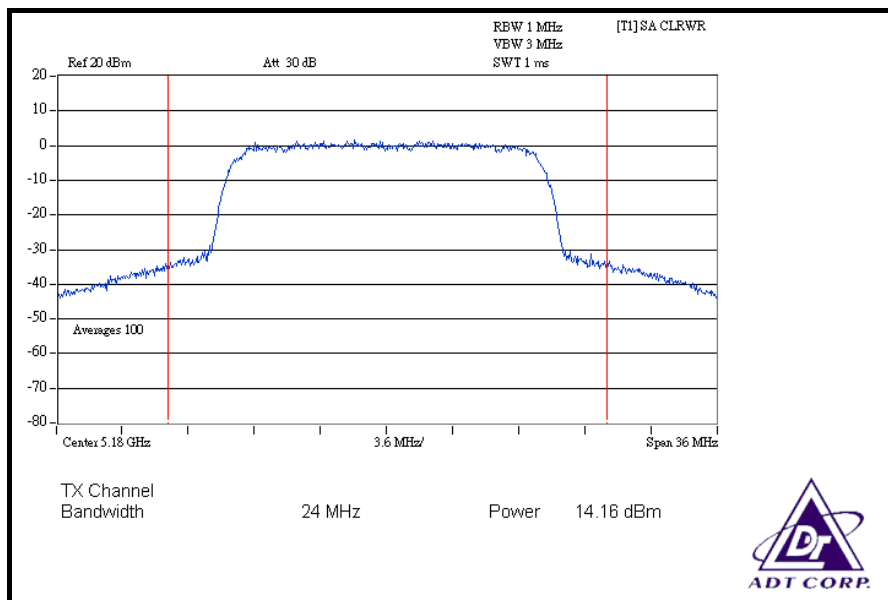

CH 40

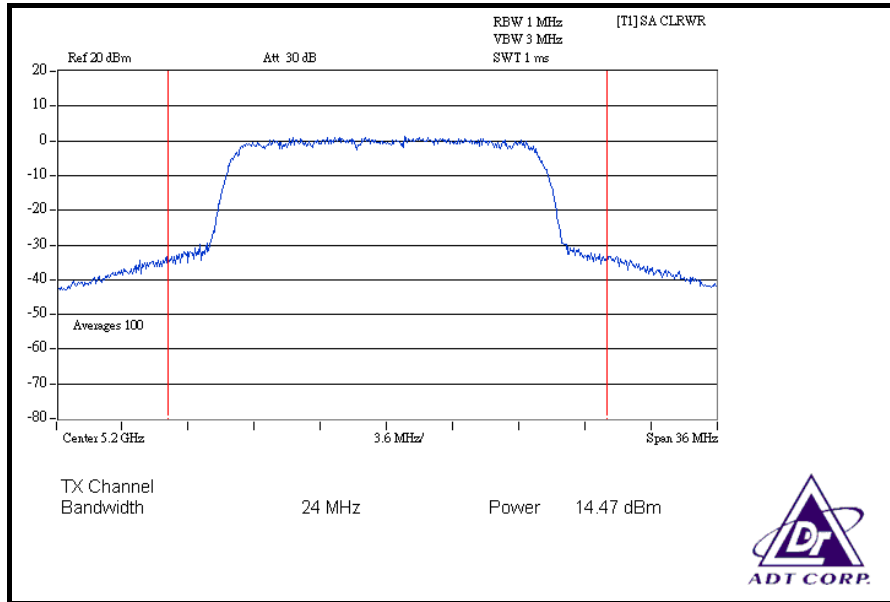

CH 48

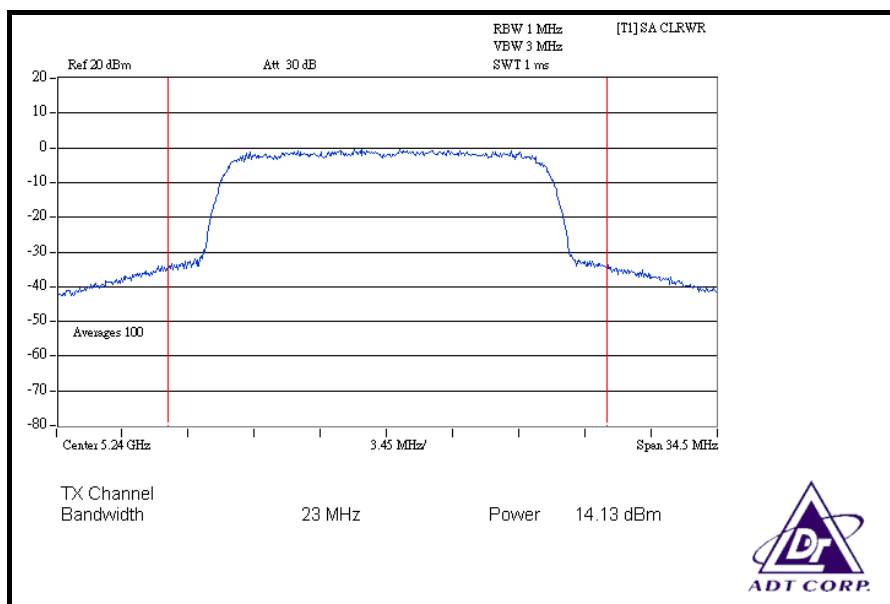




DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)			TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	10.79	10.82	10.02	34.119	15.33	30	PASS
40	5200	10.89	10.90	10.20	35.048	15.45	30	PASS
48	5240	10.43	10.23	10.13	31.889	15.04	30	PASS


FOR CHAIN 0: CH 36

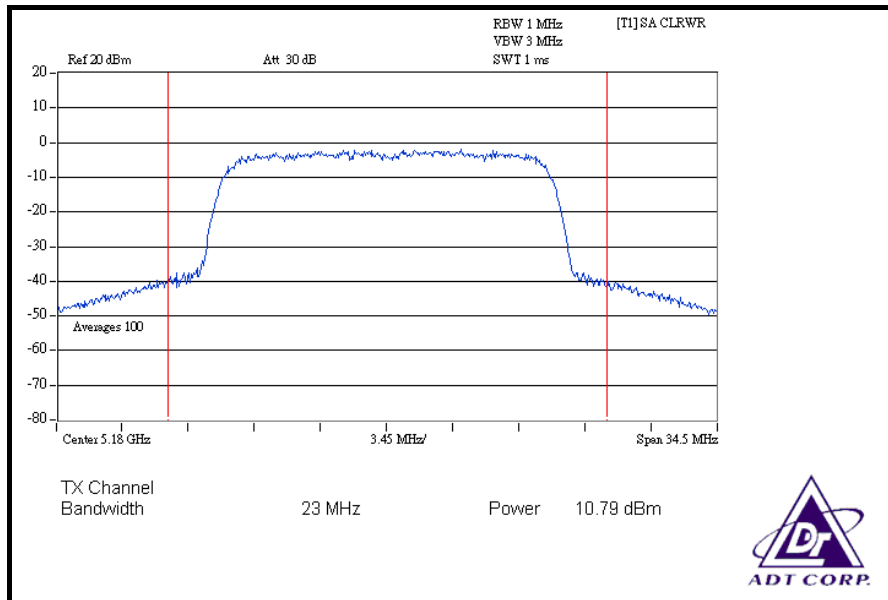


CH 40

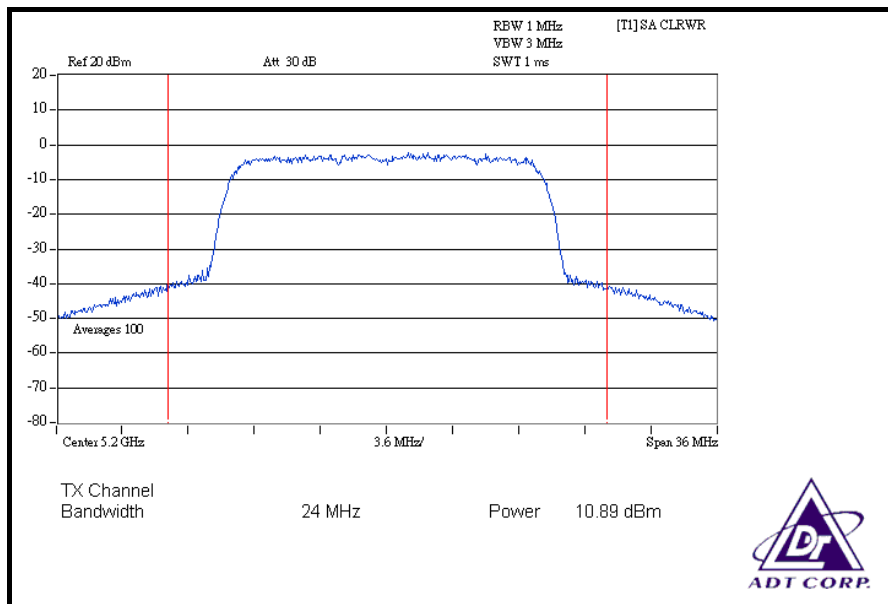


CH 48

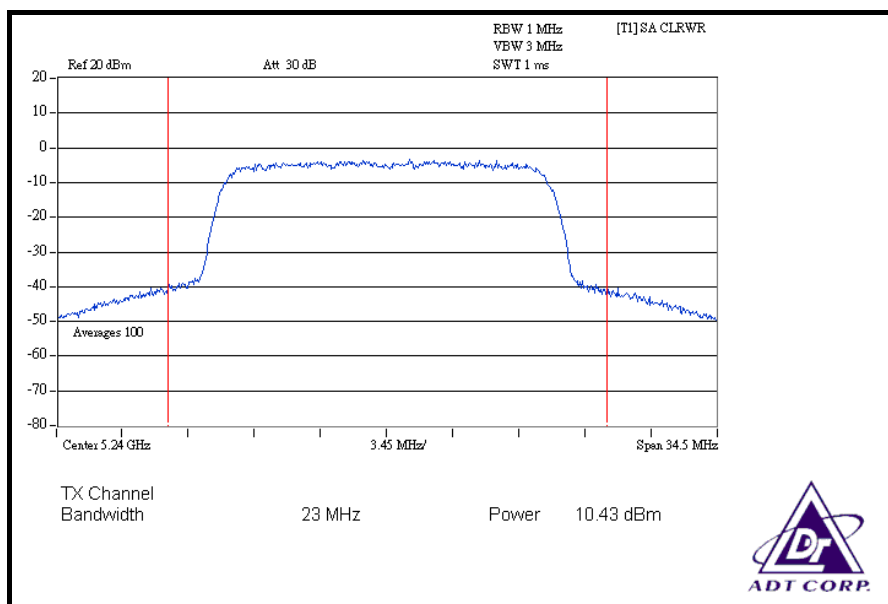


FOR CHAIN 1: CH 36

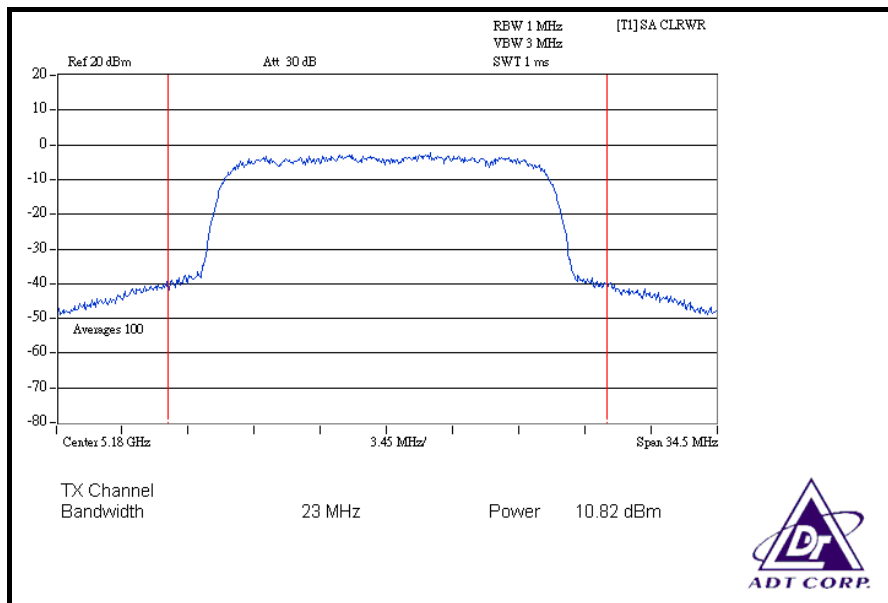


CH 40

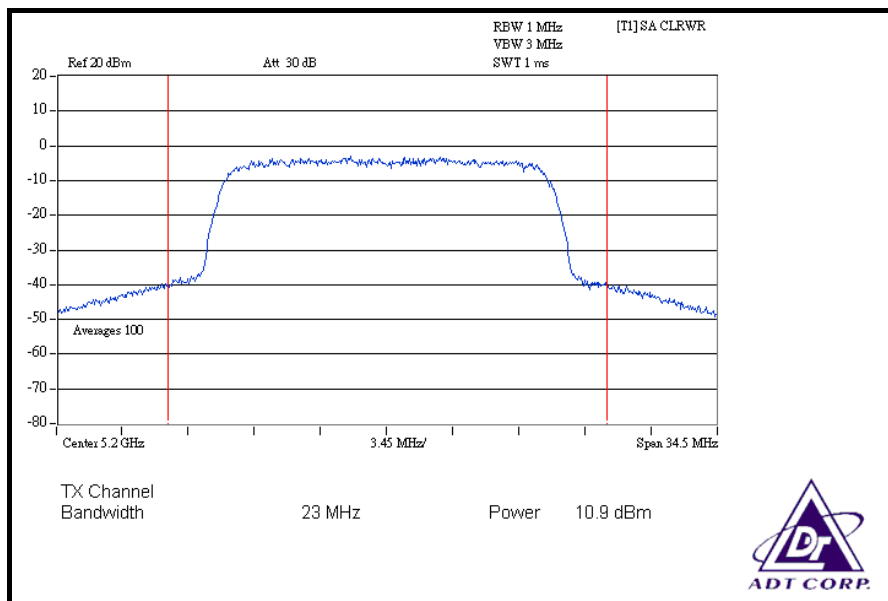


CH 48

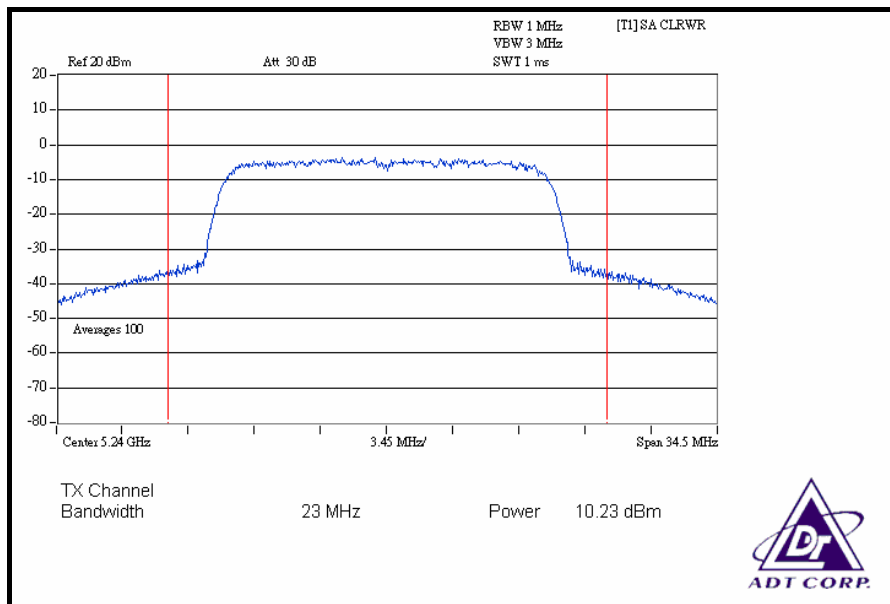


FOR CHAIN 2: CH 36

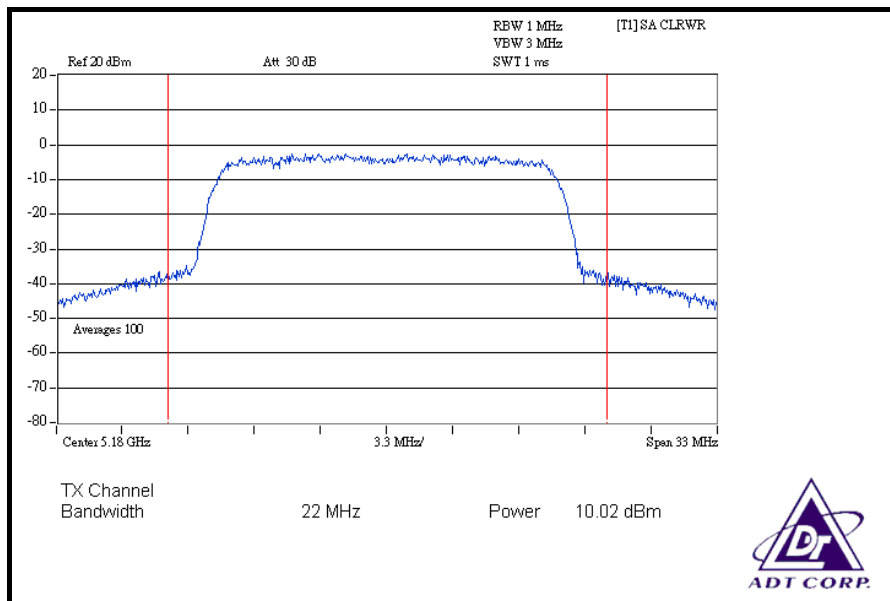

CH 40

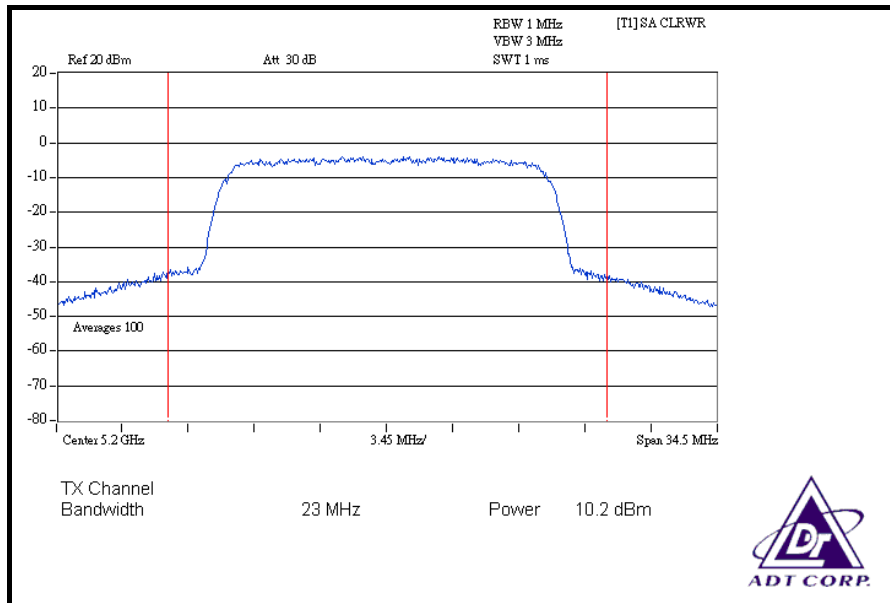

CH 48

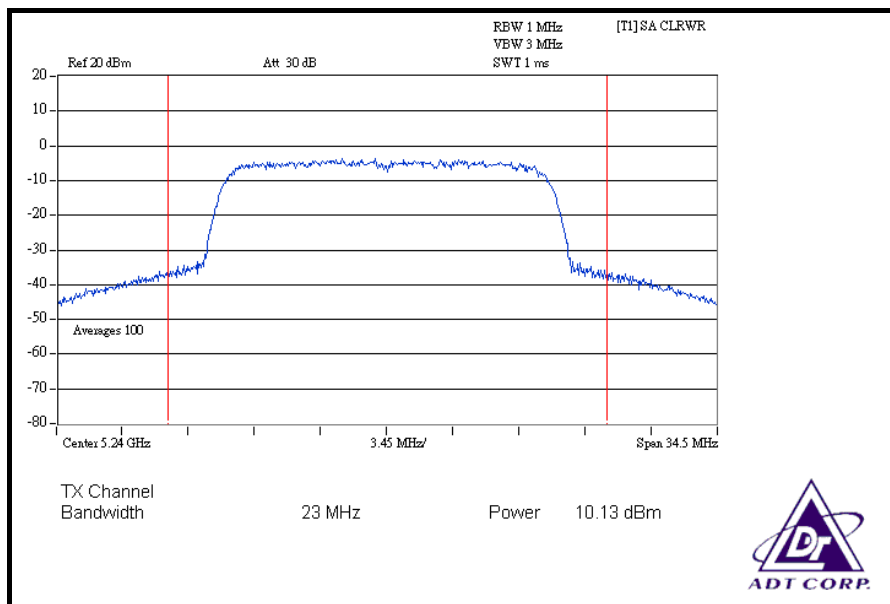




DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)			TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
38	5190	10.06	11.01	11.11	35.670	15.52	30	PASS
46	5230	10.13	11.18	11.14	36.428	15.61	30	PASS


FOR CHAIN 0: CH 38

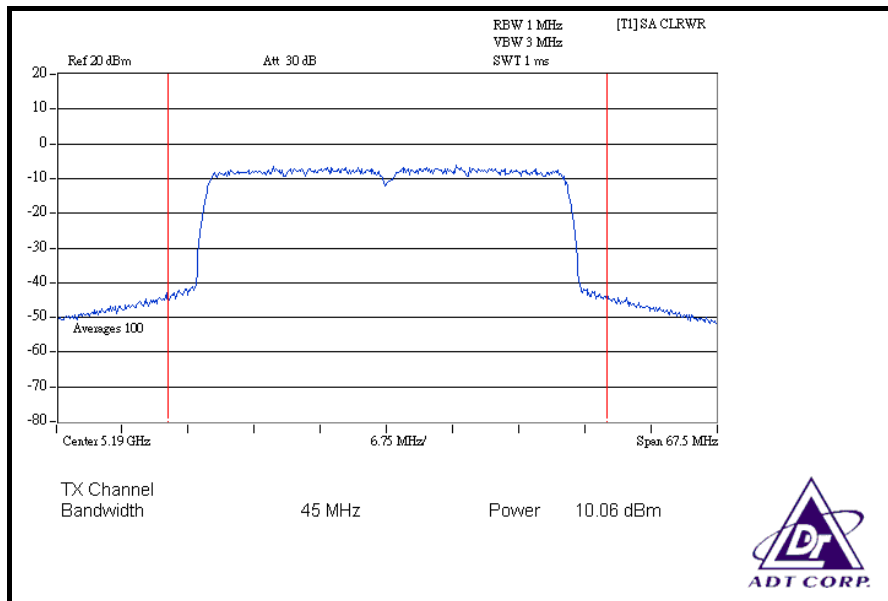


CH 46

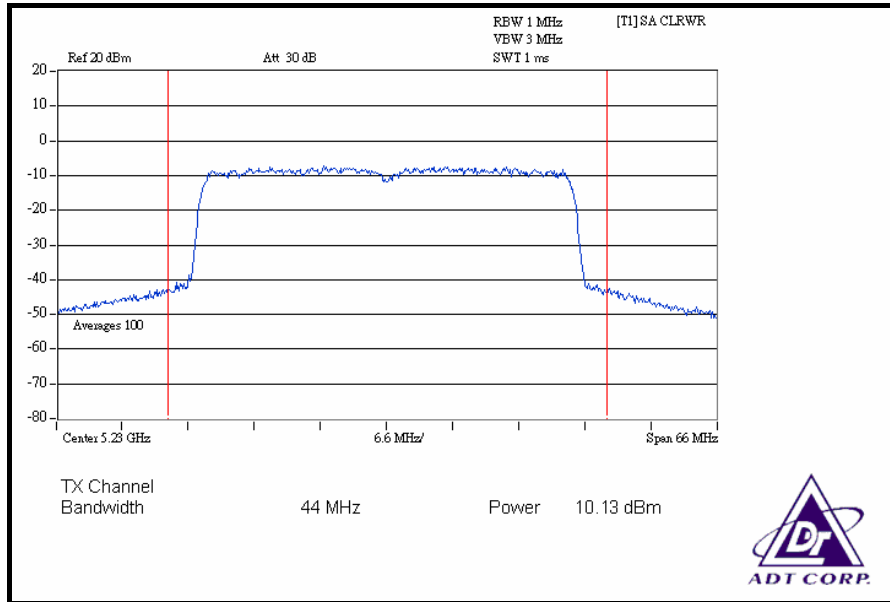


FOR CHAIN 1: CH 38

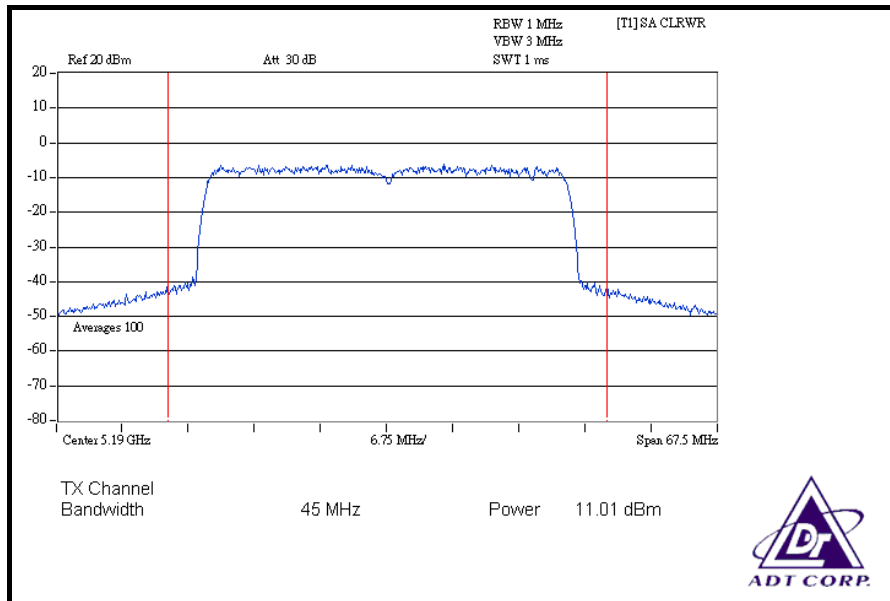


CH 46

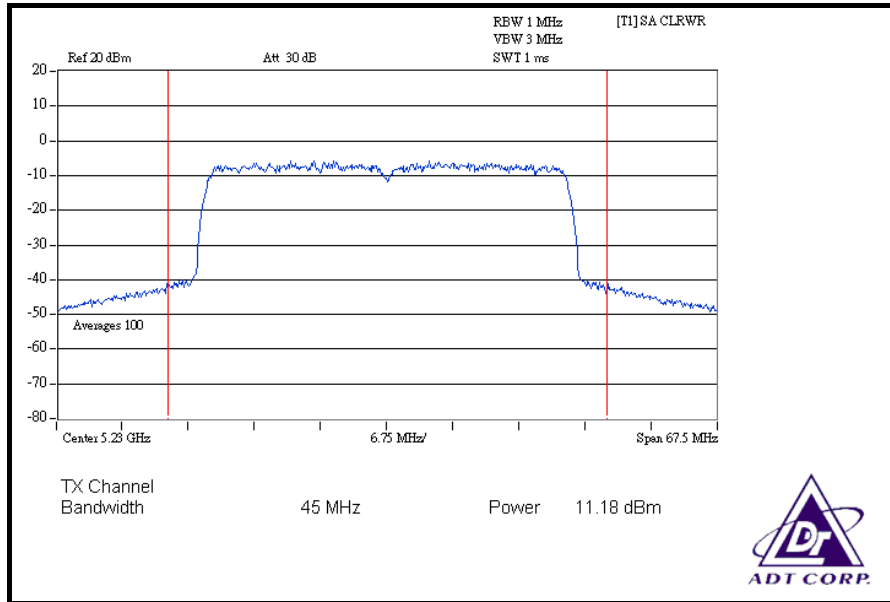

FOR CHAIN 2: CH 38

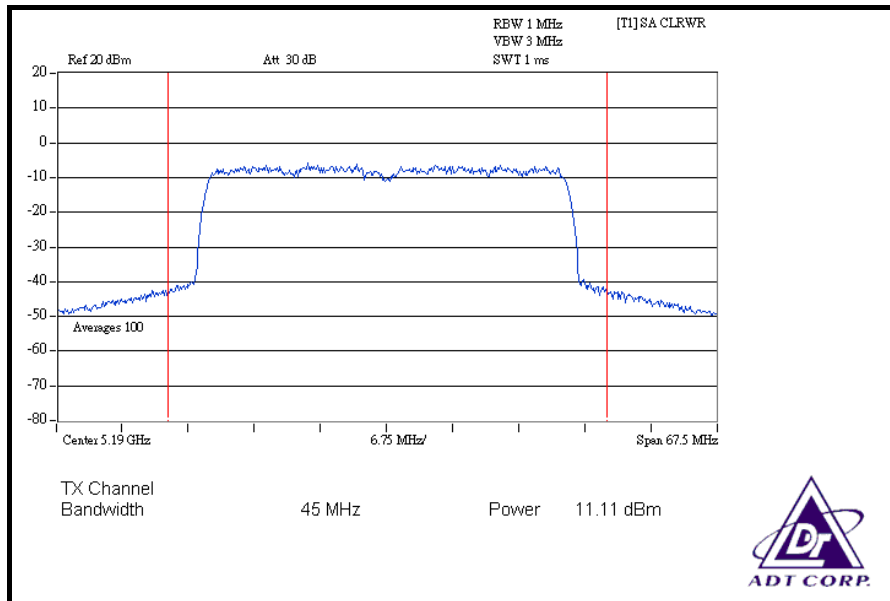

CH 46

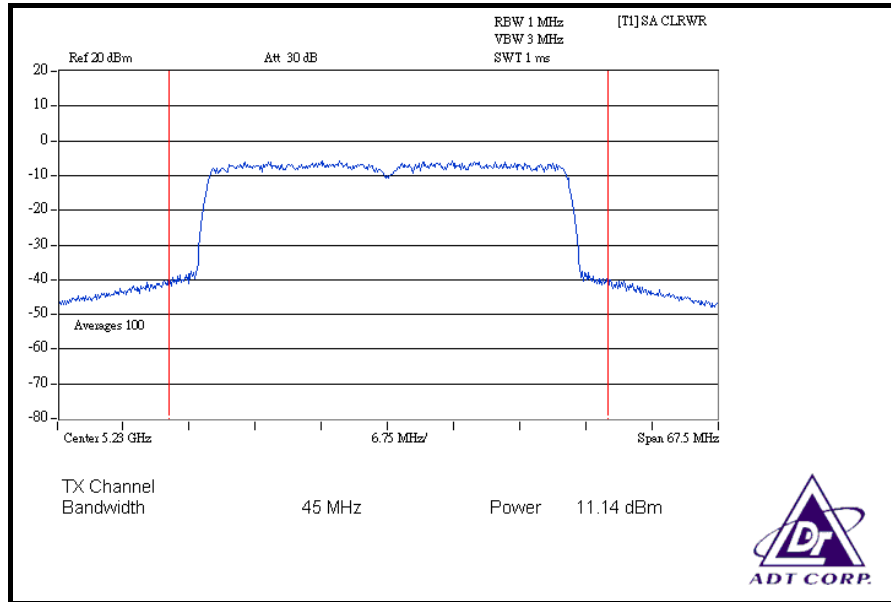




26dB OCCUPIED BANDWIDTH: 802.11a OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)	PASS / FAIL
36	5180	23.46	PASS
40	5200	23.54	PASS
48	5240	22.79	PASS


CH 36

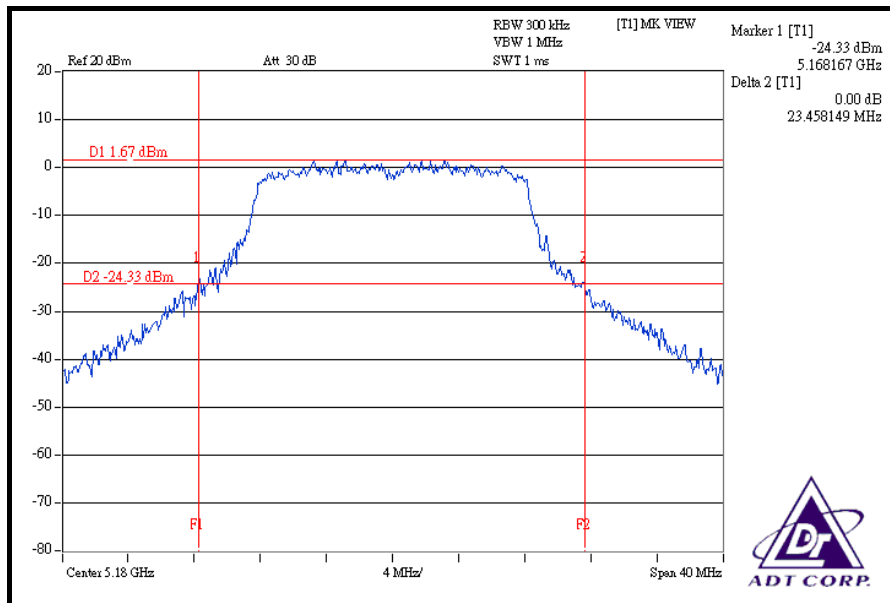

CH 40

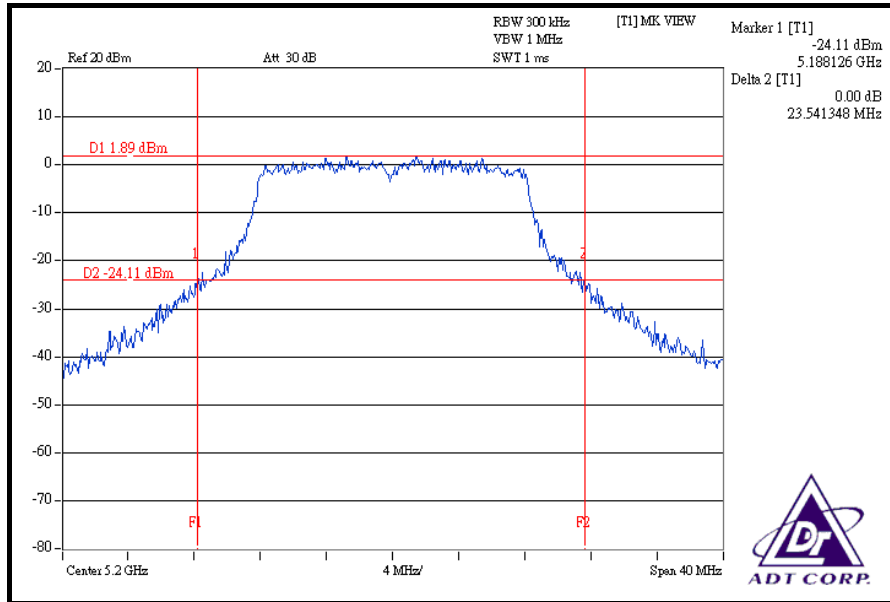

CH 48

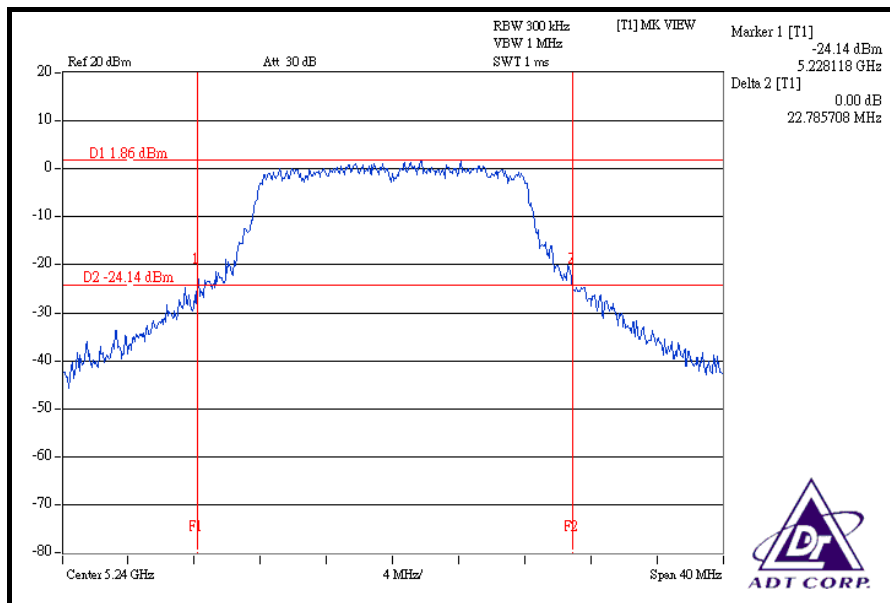




DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)			PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	
36	5180	22.84	22.54	22.00	PASS
40	5200	23.31	22.50	22.13	PASS
48	5240	22.49	22.29	22.83	PASS


FOR CHAIN 0: CH 36

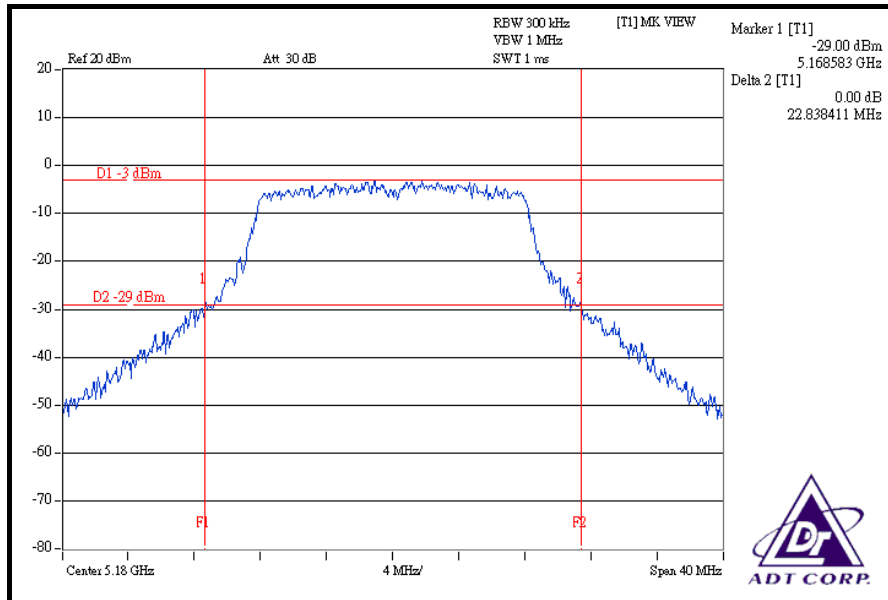


CH 40

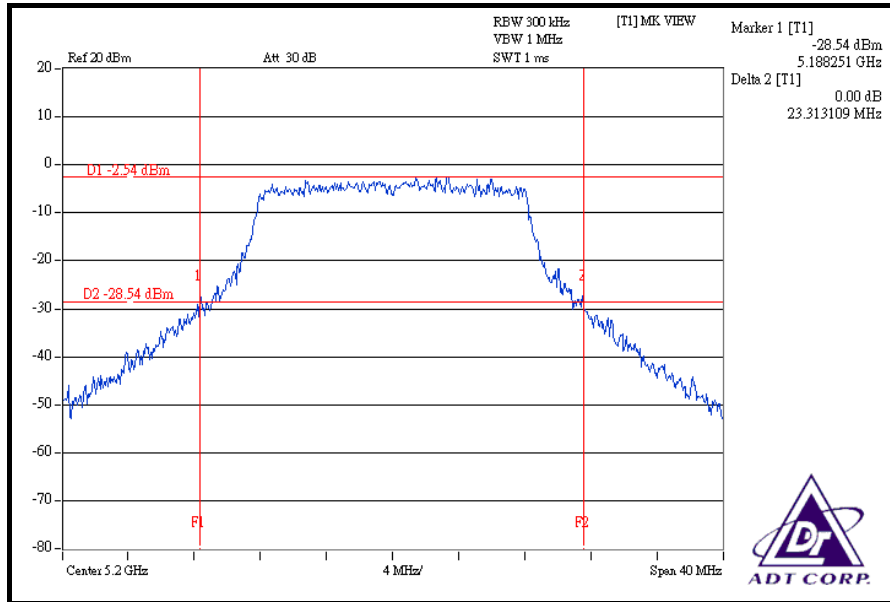


CH 48

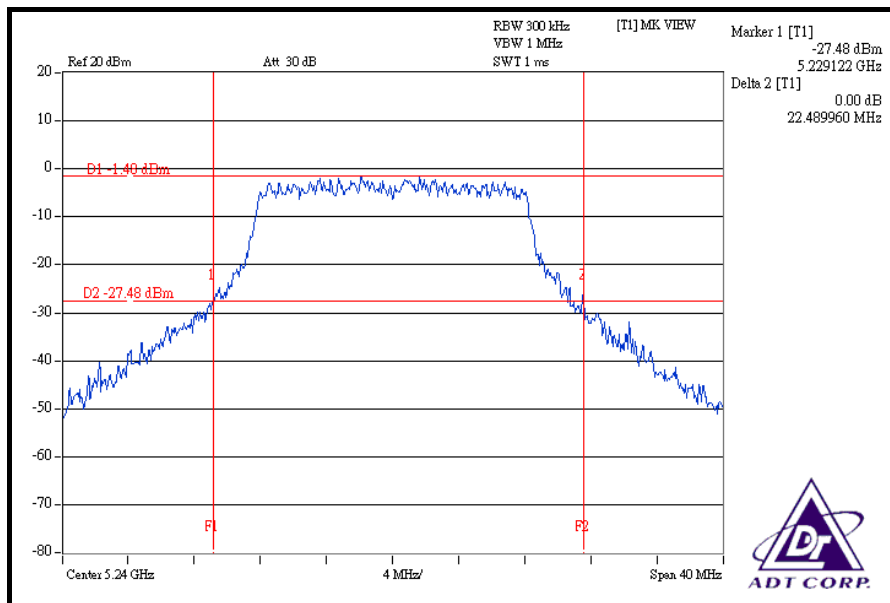

CH 40

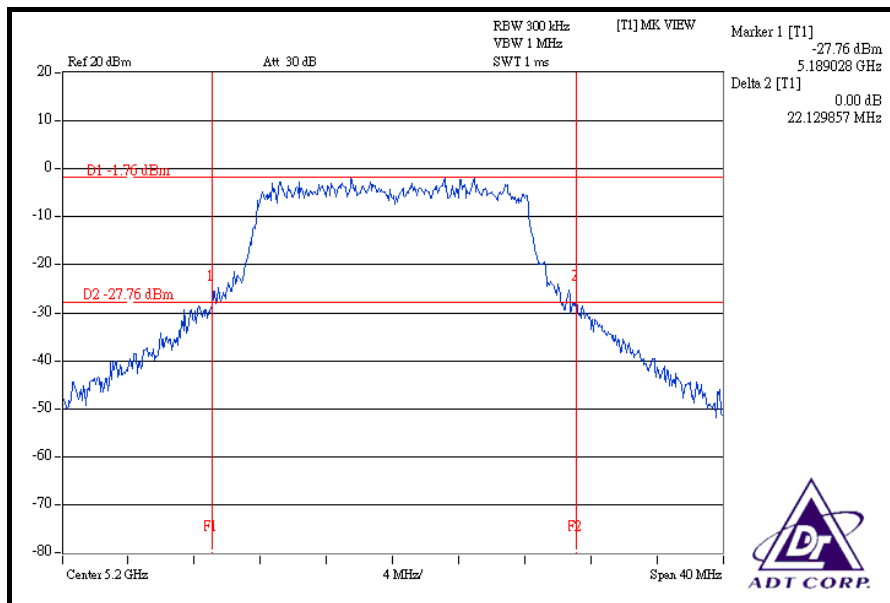

CH 48

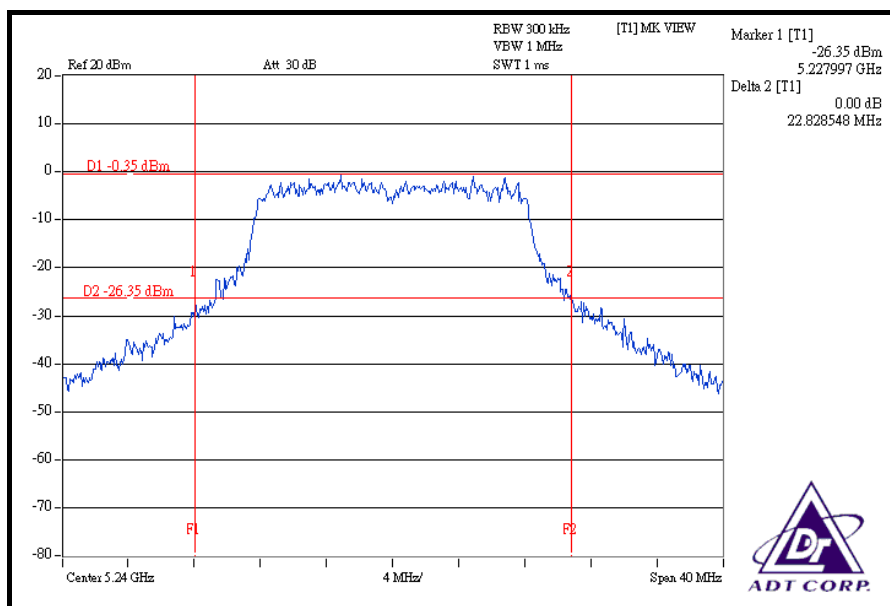




DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)			PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	
38	5190	44.53	44.62	44.17	PASS
46	5230	43.40	44.86	44.87	PASS


FOR CHAIN 0: CH 38

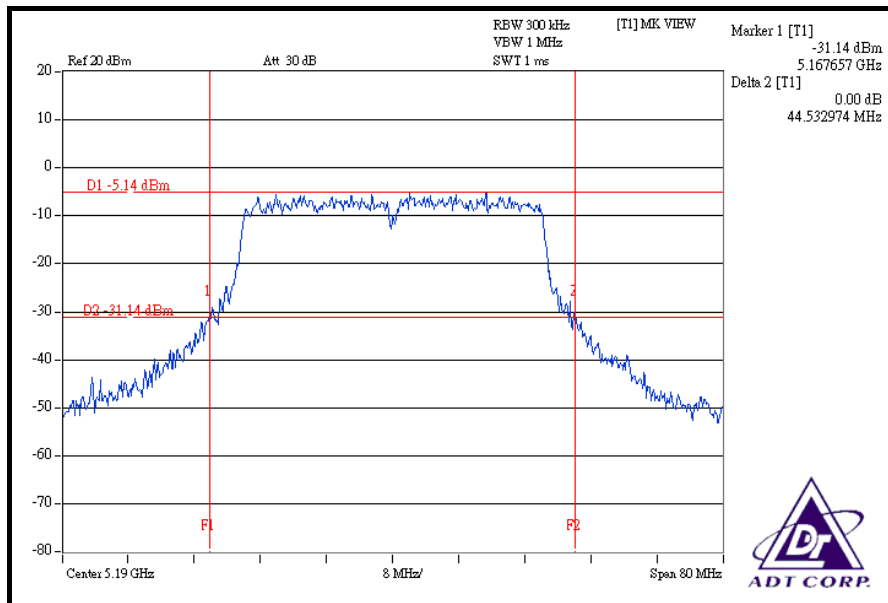

CH 46

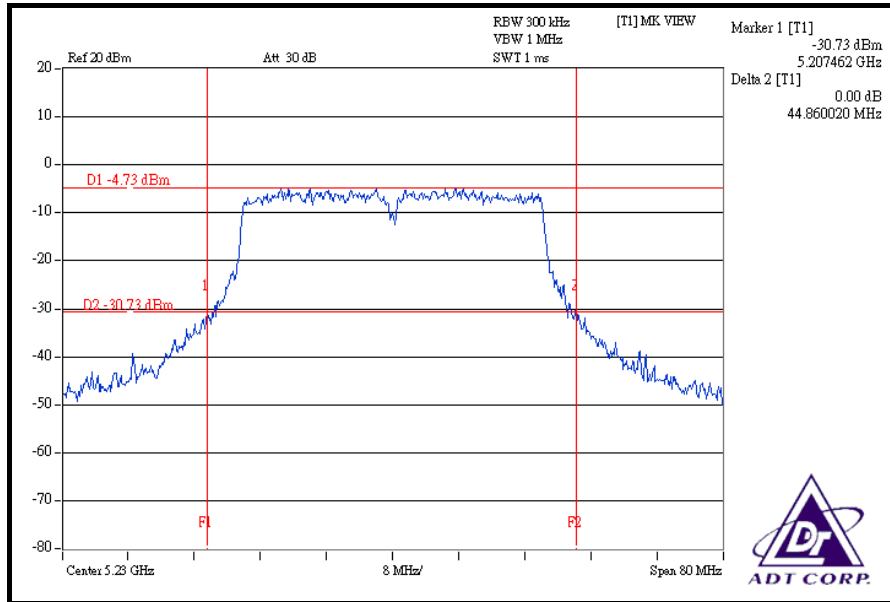

FOR CHAIN 2: CH 38

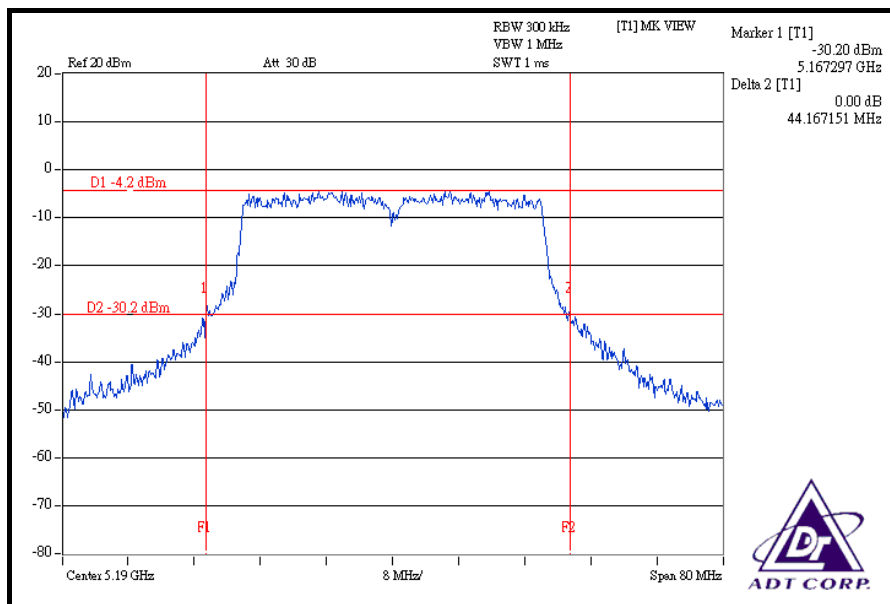

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set the spectrum bandwidth span to view the entire spectrum.
- c. Using peak detector and Max-hold function for Trace 1 (RB = 1MHz, VB = 3MHz) and 2 (RB = 1MHz, VB = 300kHz).
- d. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

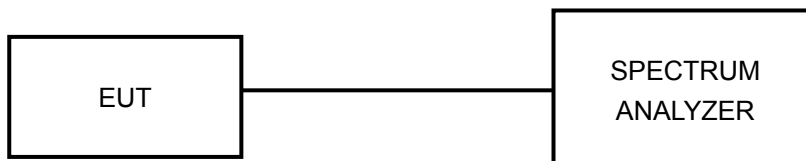

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.4.7 TEST RESULTS

802.11a OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK TO AVERAGE EXCURSION LIMIT (dB)	PASS / FAIL
36	5180	8.31	13	PASS
40	5200	8.46	13	PASS
48	5240	8.34	13	PASS


CH 36

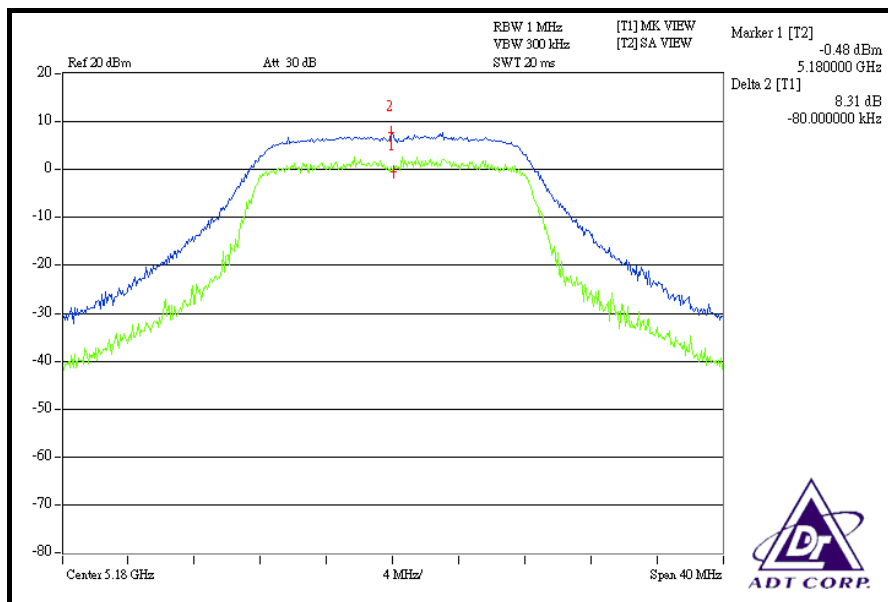

CH 48

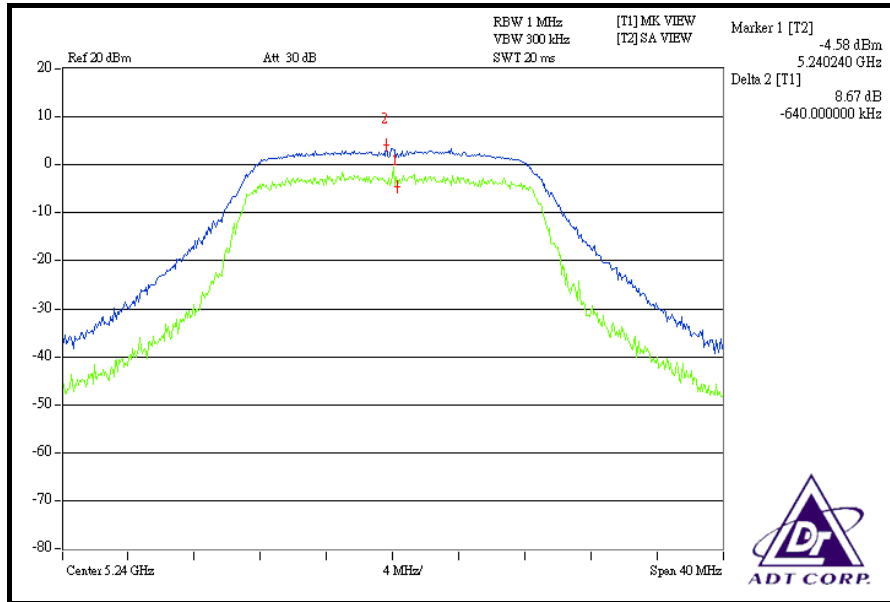

FOR CHAIN 2: CH 36

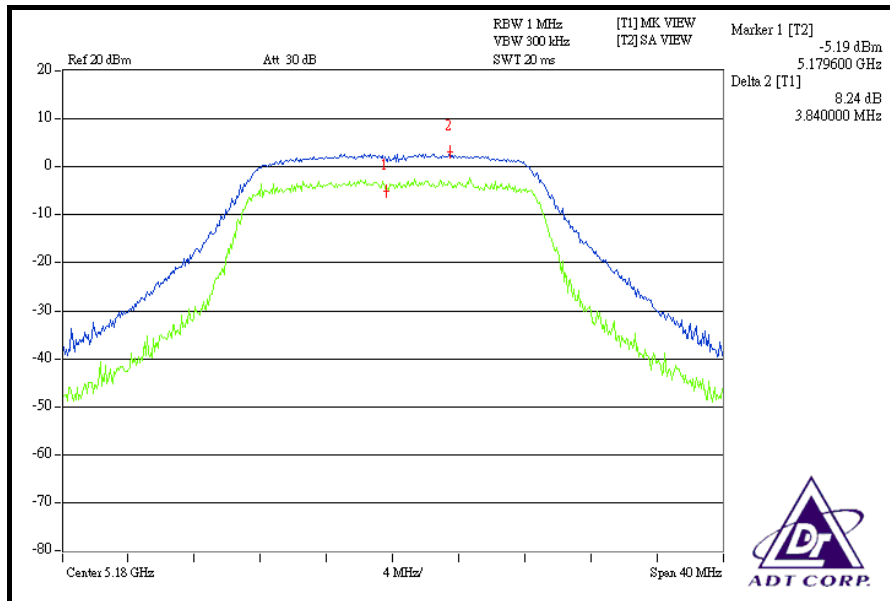




DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)			PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
38	5190	9.39	10.33	9.97	13	PASS
46	5230	10.37	9.69	10.37	13	PASS


FOR CHAIN 0: CH 38

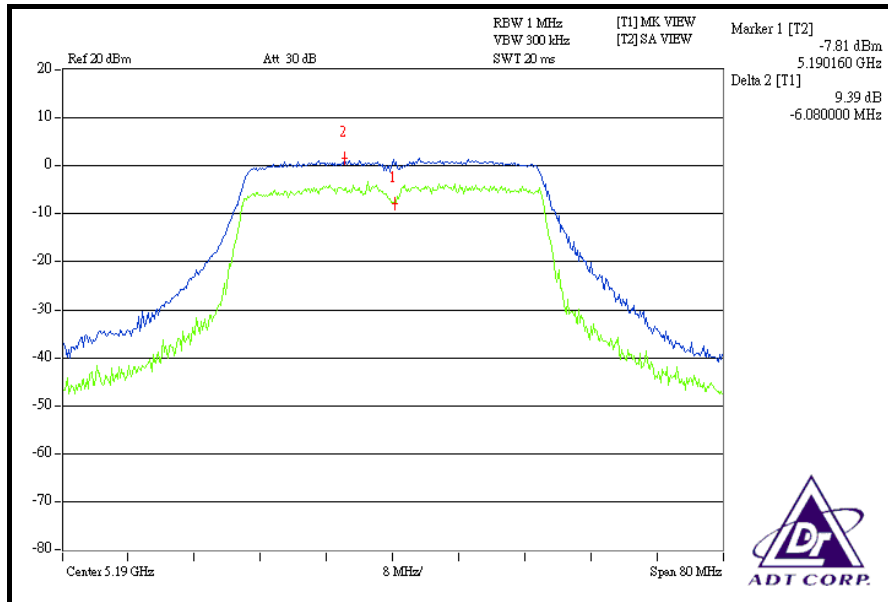

CH 46

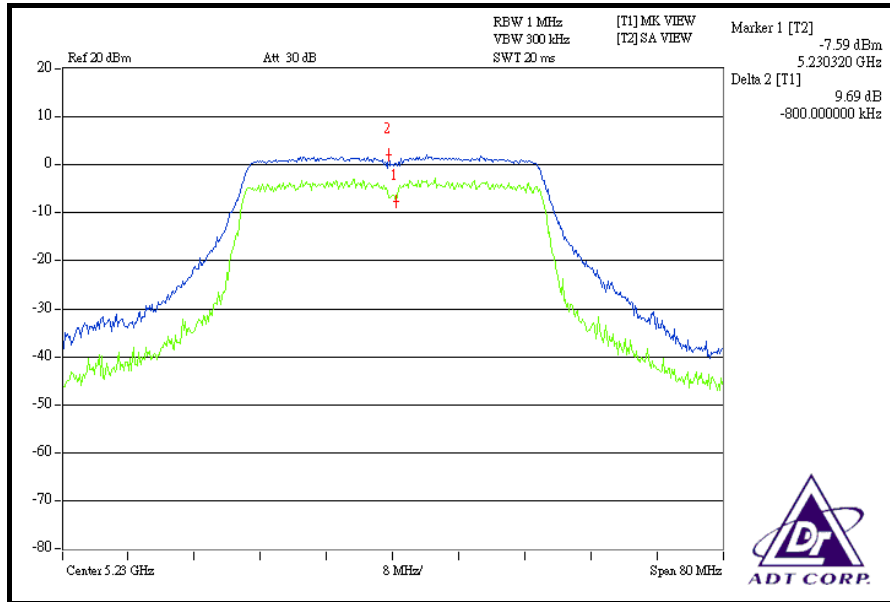

FOR CHAIN 2: CH 38

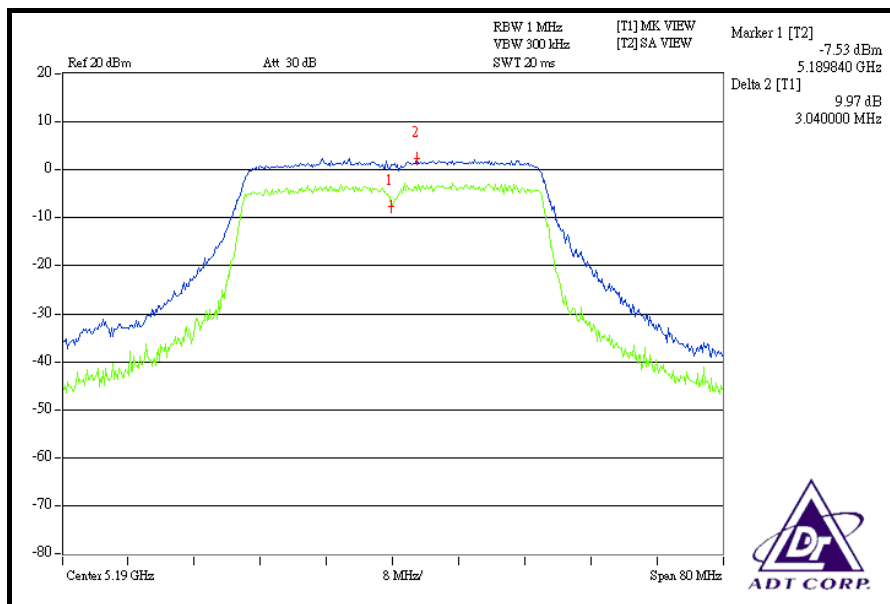

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	4dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW = 1MHz, VBW = 3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

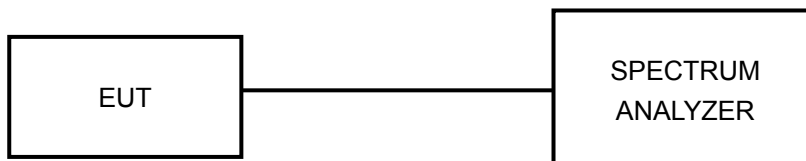

4.5.6 EUT OPERATING CONDITIONS

Same as 5.3.6


4.5.7 TEST RESULTS

802.11a OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
36	5180	-3.68	4	PASS
40	5200	-3.48	4	PASS
48	5240	-3.68	4	PASS

CH 36

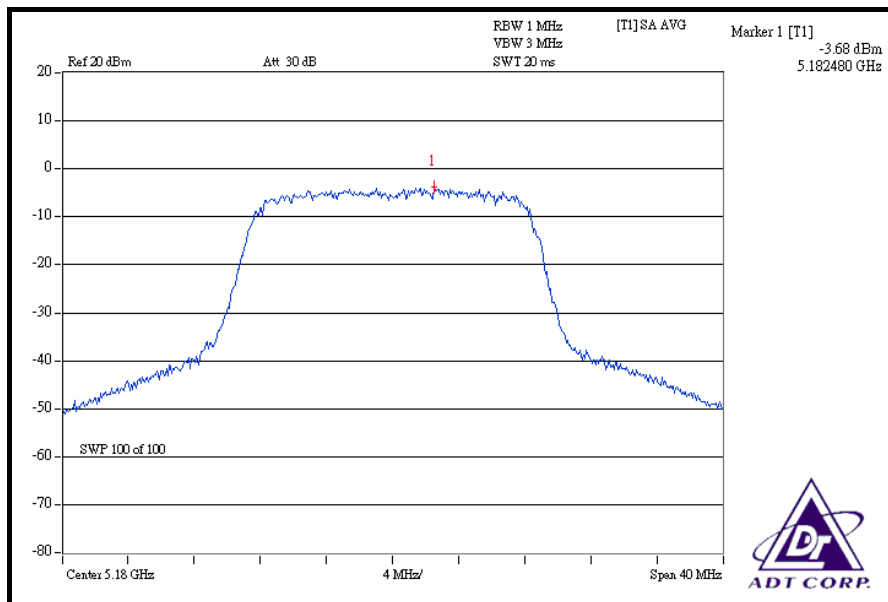




DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)			TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	-7.24	-7.39	-8.47	0.513	-2.90	4	PASS
40	5200	-7.48	-7.49	-8.33	0.504	-2.98	4	PASS
48	5240	-7.29	-7.43	-8.56	0.507	-2.95	4	PASS


FOR CHAIN 0: CH 36

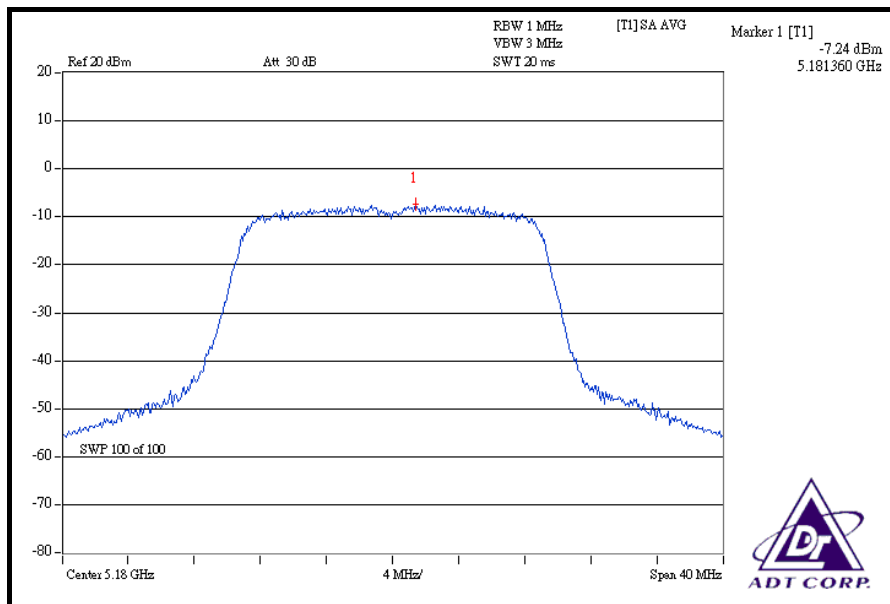

FOR CHAIN 1: CH 36

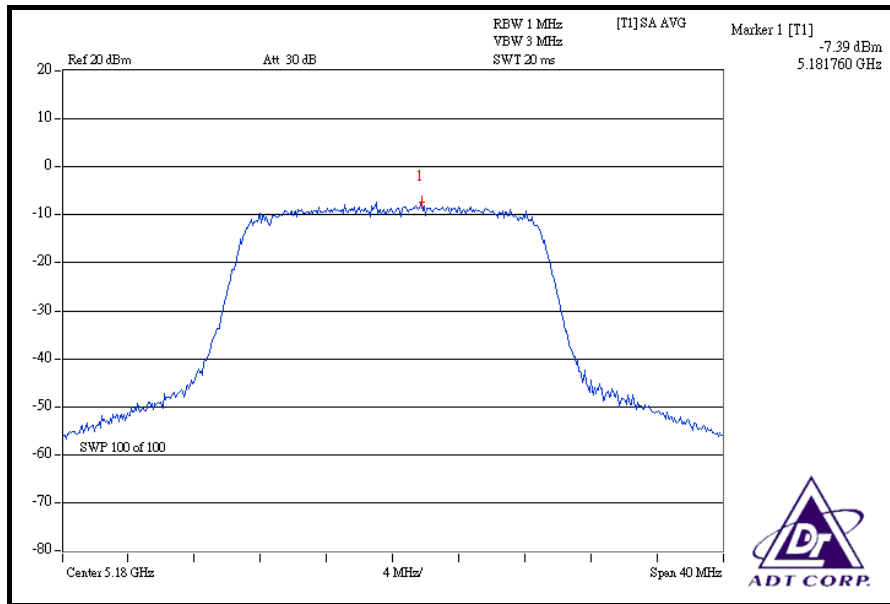

CH 40

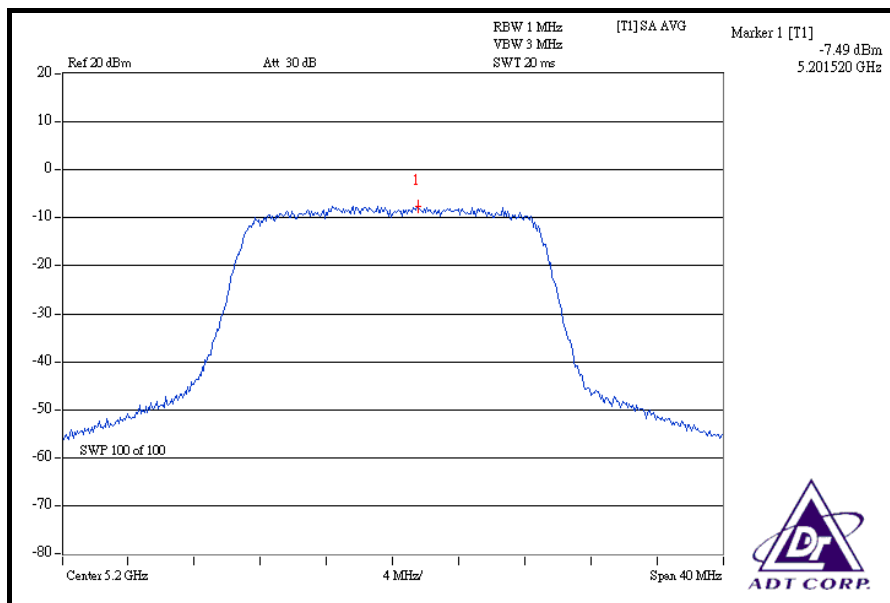




DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 991hPa
TESTED BY	Brad Wu		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)			TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
38	5190	-10.17	-8.83	-8.95	0.354	-4.50	4	PASS
46	5230	-10.17	-8.82	-8.96	0.354	-4.50	4	PASS


FOR CHAIN 0: CH 38

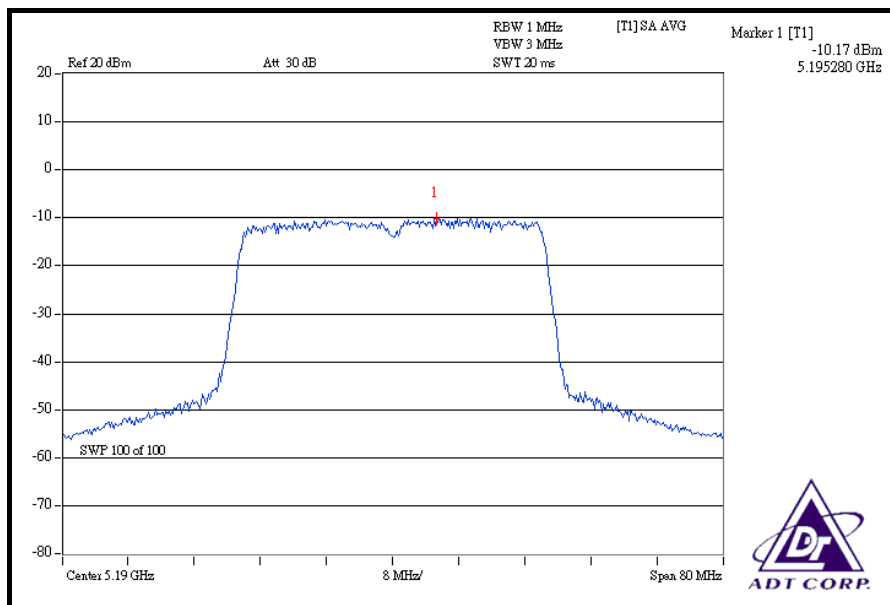


CH 46

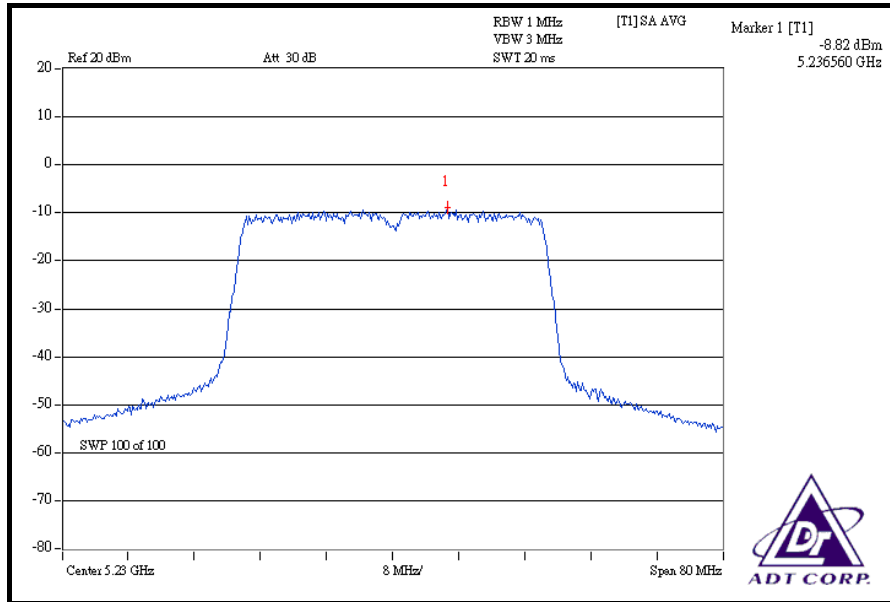

FOR CHAIN 2: CH 38

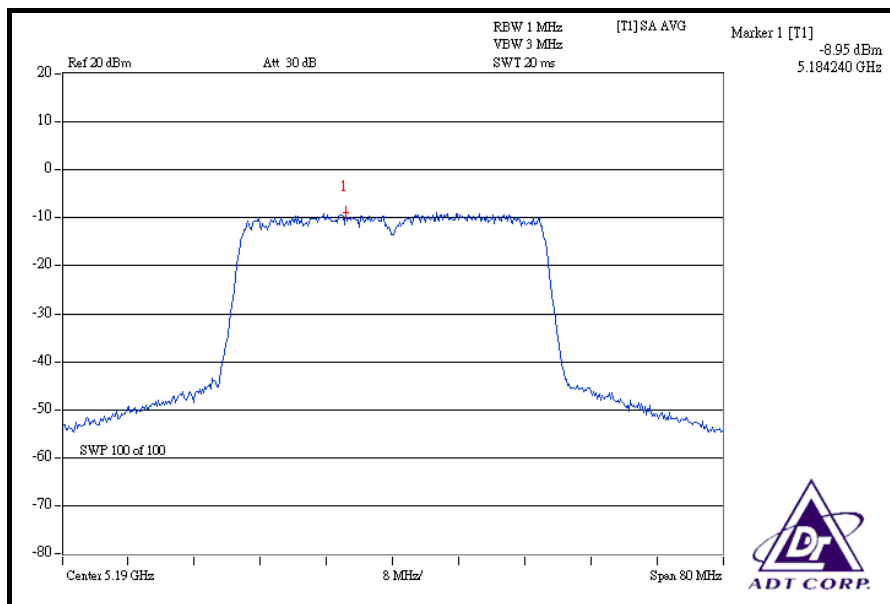

CH 46

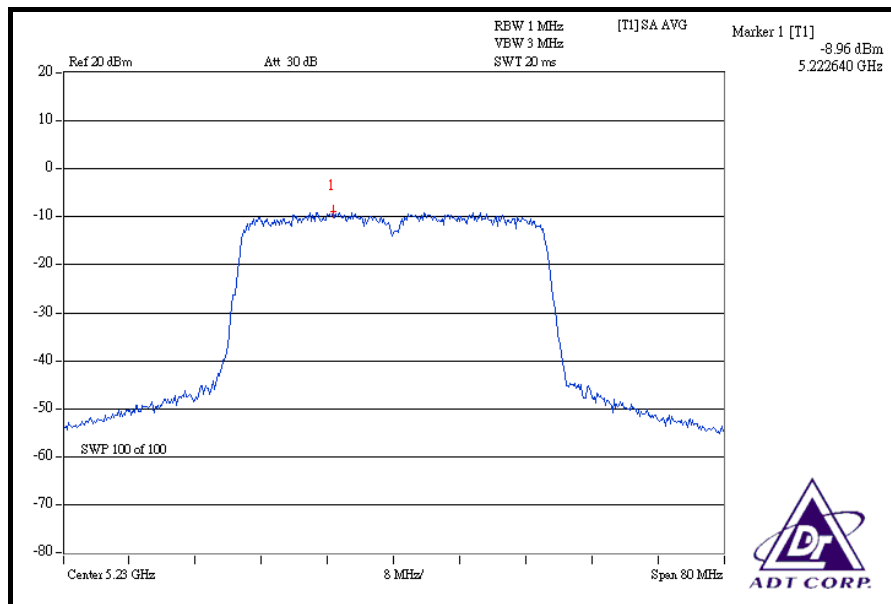



4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ANRITSU SPECTRUM ANALYZER	MS2667C	M10281	Nov. 21, 2008
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

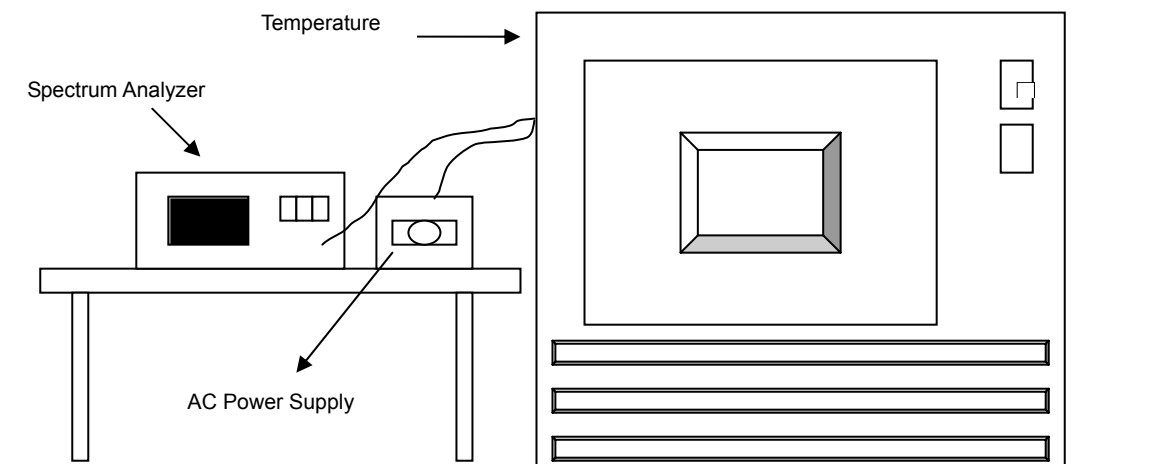

4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6



4.6.7 TEST RESULTS

OPERATING FREQUENCY: 5200MHz						LIMIT: $\pm 0.01\%$			
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5199.907602	-0.0017769	5199.917904	-0.0015788	5199.940999	-0.0011346	5199.93918	-0.0011696
	110.0	5199.923639	-0.0014685	5199.923668	-0.0014679	5199.923788	-0.0014656	5199.923575	-0.0014697
	93.5	5199.926622	-0.0014111	5199.926532	-0.0014128	5199.926572	-0.0014121	5199.926479	-0.0014139
40	126.5	5199.918948	-0.0015587	5199.918871	-0.0015602	5199.919022	-0.0015573	5199.919196	-0.0015539
	110.0	5199.924909	-0.0014441	5199.925091	-0.0014406	5199.925031	-0.0014417	5199.924847	-0.0014452
	93.5	5199.936726	-0.0012168	5199.936485	-0.0012214	5199.937029	-0.0012110	5199.936839	-0.0012146
30	126.5	5199.920095	-0.0015366	5199.920198	-0.0015347	5199.92024	-0.0015338	5199.920121	-0.0015361
	110.0	5199.925987	-0.0014233	5199.926076	-0.0014216	5199.926049	-0.0014221	5199.926206	-0.0014191
	93.5	5199.944052	-0.0010759	5199.944072	-0.0010755	5199.944001	-0.0010769	5199.944212	-0.0010728
20	126.5	5199.926908	-0.0014056	5199.926865	-0.0014064	5199.926792	-0.0014078	5199.927148	-0.0014010
	110.0	5199.92771	-0.0013902	5199.927566	-0.0013930	5199.927892	-0.0013867	5199.927547	-0.0013933
	93.5	5199.951647	-0.0009299	5199.951885	-0.0009253	5199.951587	-0.0009310	5199.951575	-0.0009312
10	126.5	5199.934151	-0.0012663	5199.934083	-0.0012676	5199.934260	-0.0012642	5199.934453	-0.0012605
	110.0	5199.942763	-0.0011007	5199.94264	-0.0011031	5199.942695	-0.0011020	5199.942656	-0.0011028
	93.5	5199.958013	-0.0008074	5199.958224	-0.0008034	5199.957696	-0.0008135	5199.957842	-0.0008107
0	126.5	5199.937825	-0.0011957	5199.937831	-0.0011956	5199.937647	-0.0011991	5199.937701	-0.0011981
	110.0	5199.949855	-0.0009643	5199.949676	-0.0009678	5199.949804	-0.0009653	5199.949805	-0.0009653
	93.5	5199.963913	-0.0006940	5199.964027	-0.0006918	5199.963714	-0.0006978	5199.964062	-0.0006911
-10	126.5	5199.949968	-0.0009622	5199.949849	-0.0009644	5199.950016	-0.0009612	5199.949960	-0.0009623
	110.0	5199.956736	-0.0008320	5199.956738	-0.0008320	5199.956682	-0.0008330	5199.956716	-0.0008324
	93.5	5199.971184	-0.0005542	5199.971236	-0.0005532	5199.971102	-0.0005557	5199.971196	-0.0005539
-20	126.5	5199.955001	-0.0008654	5199.954992	-0.0008655	5199.95516	-0.0008623	5199.955158	-0.0008623
	110.0	5199.960422	-0.0007611	5199.960382	-0.0007619	5199.960275	-0.0007639	5199.960587	-0.0007579
	93.5	5199.975232	-0.0004763	5199.975174	-0.0004774	5199.975026	-0.0004803	5199.975163	-0.0004776
-30	126.5	5199.960388	-0.0007618	5199.960398	-0.0007616	5199.960348	-0.0007625	5199.960520	-0.0007592
	110.0	5199.974611	-0.0004882	5199.97461	-0.0004883	5199.974596	-0.0004885	5199.974619	-0.0004881
	93.5	5199.977654	-0.0004297	5199.977785	-0.0004272	5199.977993	-0.0004232	5199.977646	-0.0004299



4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
FOR CONDUCTED MEASUREMENT:			
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008
FOR RADIATED MEASUREMENT:			
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Jul. 27, 2008
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 05, 2008
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 03, 2009
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 30, 2008
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01910	Sep. 19, 2008
Preamplifier Agilent	8447D	2944A10638	Dec. 19, 2008
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274039/223650	Nov. 07, 2008
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Apr. 23, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

FOR CONDUCTED MEASUREMENT:

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 3MHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

FOR RADIATED MEASUREMENT:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 1MHz and 3MHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (for 802.11a), 1kHz (for draft 802.11n) for Average detection (AV) at frequency above 1GHz

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.25GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW = 1MHz, VBW = 3MHz) are attached on the following pages.

802.11a OFDM MODULATION

Channel 36 (5180MHz)



The band edge emission plot on the next page shows 48.22dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 105.50dBuV/m (Peak), so the maximum field strength in restrict band is $105.50 - 48.22 = 57.28$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 53.66dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 95.17dBuV/m (Average), so the maximum field strength in restrict band is $95.17 - 53.66 = 41.51$ dBuV/m which is under 54dBuV/m limit.



Channel 48 (5240MHz)

The band edge emission plot on the next second page shows 51.28dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 105.12dBuV/m (Peak), so the maximum field strength in restrict band is $105.12 - 51.28 = 53.84$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 53.52dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 94.84dBuV/m (Average), so the maximum field strength in restrict band is $94.84 - 53.52 = 41.32$ dBuV/m which is under 54dBuV/m limit.

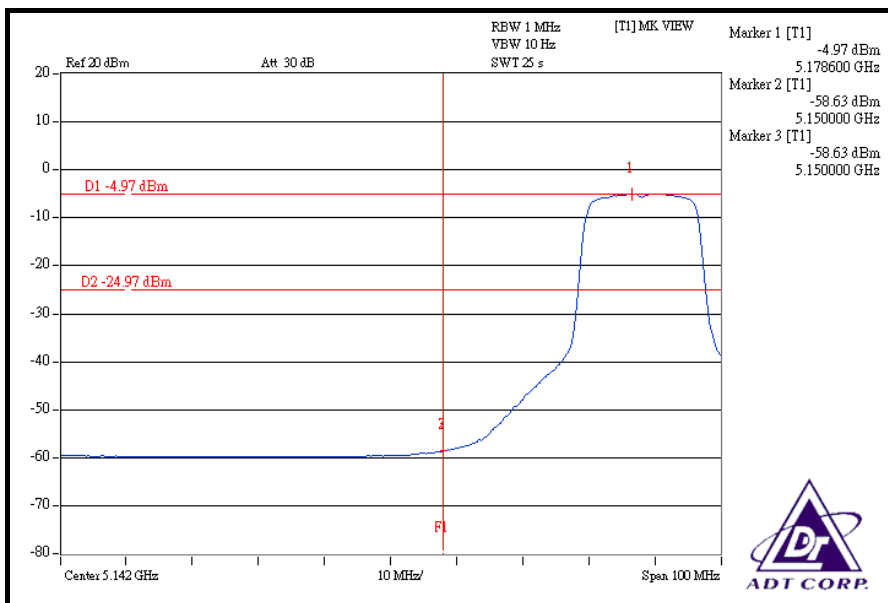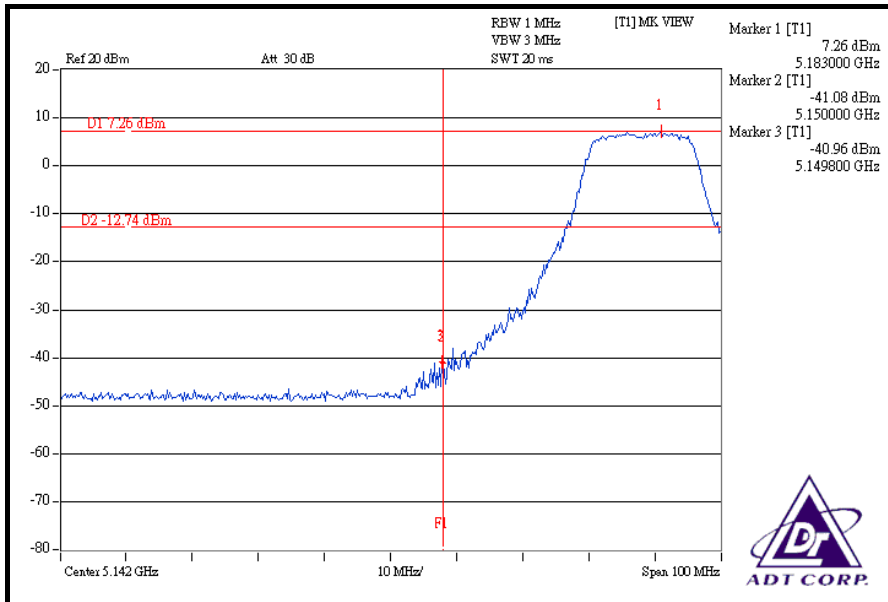

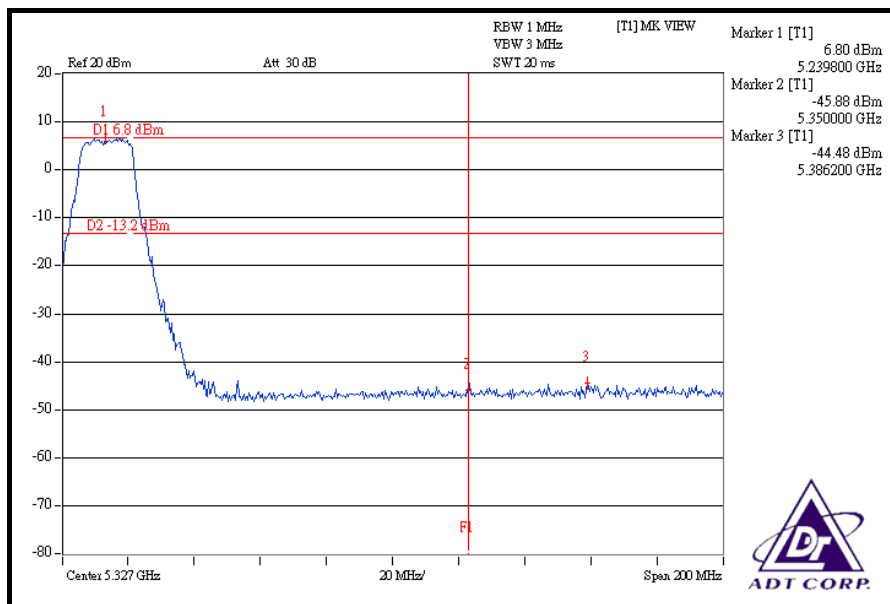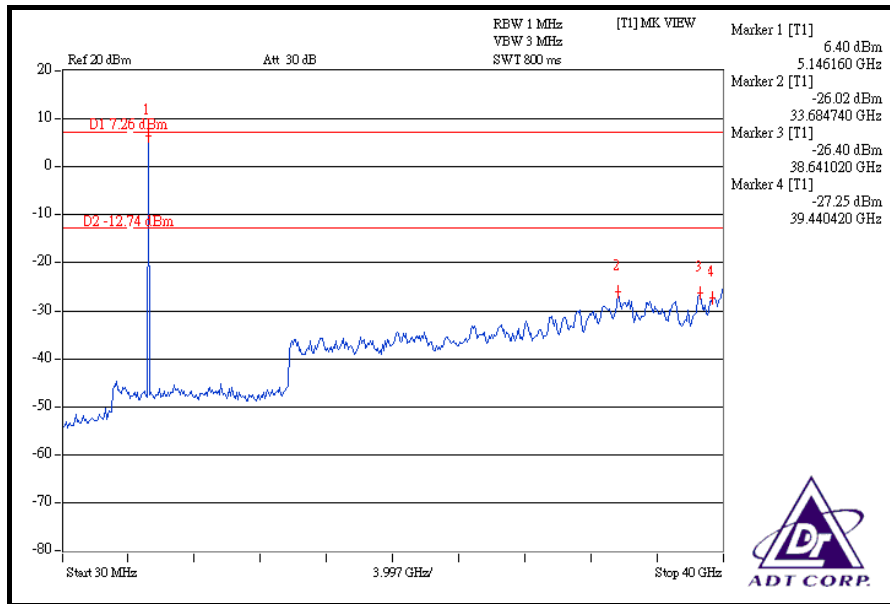

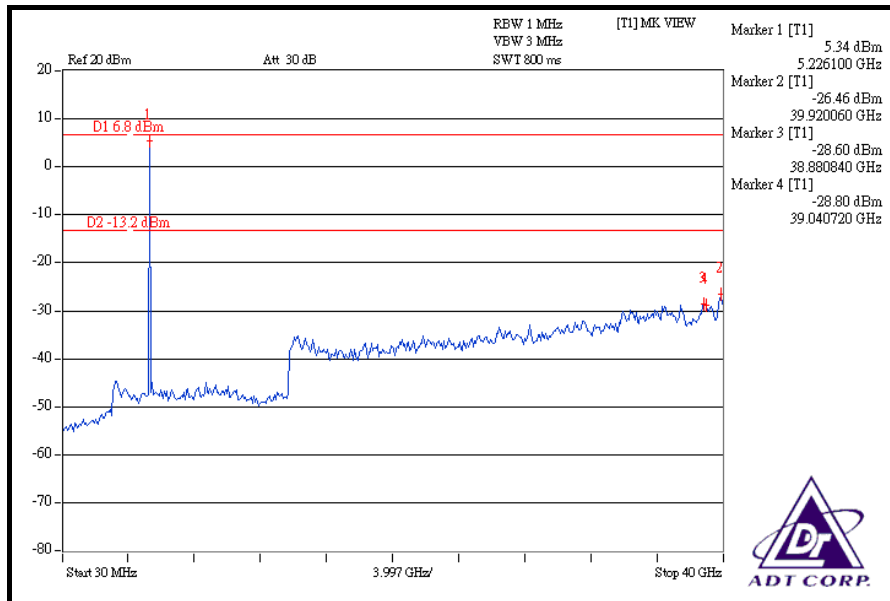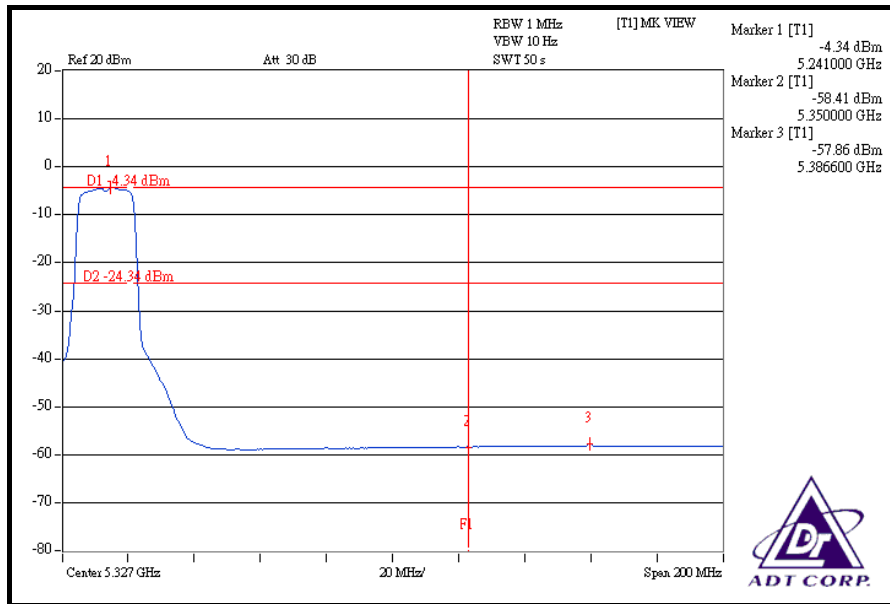

DRAFT 802.11n (20MHz) OFDM MODULATION

Channel 36 (5180MHz)



The band edge emission plot on the next page shows 49.72dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 109.86dBuV/m (Peak), so the maximum field strength in restrict band is $109.86 - 49.72 = 60.14$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 52.40dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 99.58dBuV/m (Average), so the maximum field strength in restrict band is $99.58 - 52.40 = 47.18$ dBuV/m which is under 54dBuV/m limit.



Channel 48 (5240MHz)

The band edge emission plot on the next second page shows 48.56dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 109.41dBuV/m (Peak), so the maximum field strength in restrict band is $109.41 - 48.56 = 60.85$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 51.45dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 98.89dBuV/m (Average), so the maximum field strength in restrict band is $98.89 - 51.45 = 47.44$ dBuV/m which is under 54dBuV/m limit.

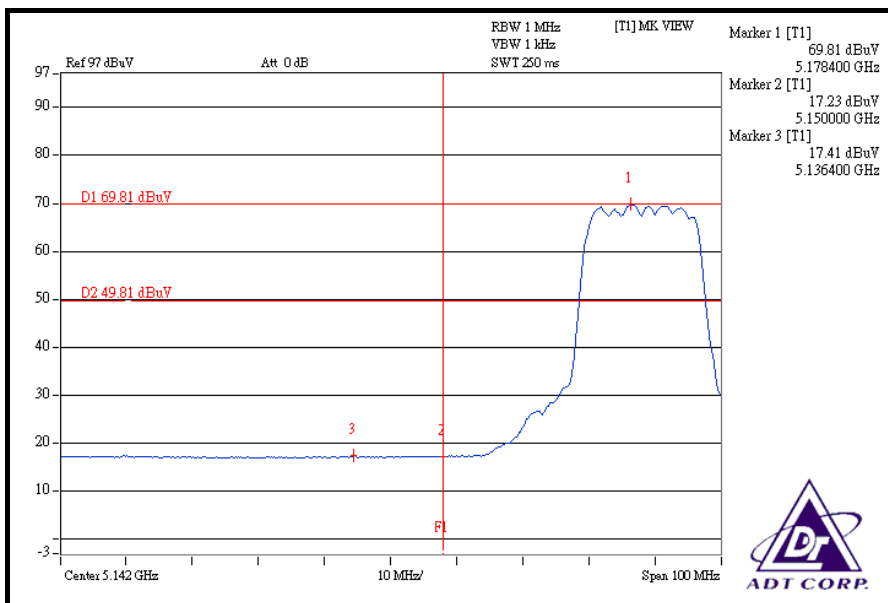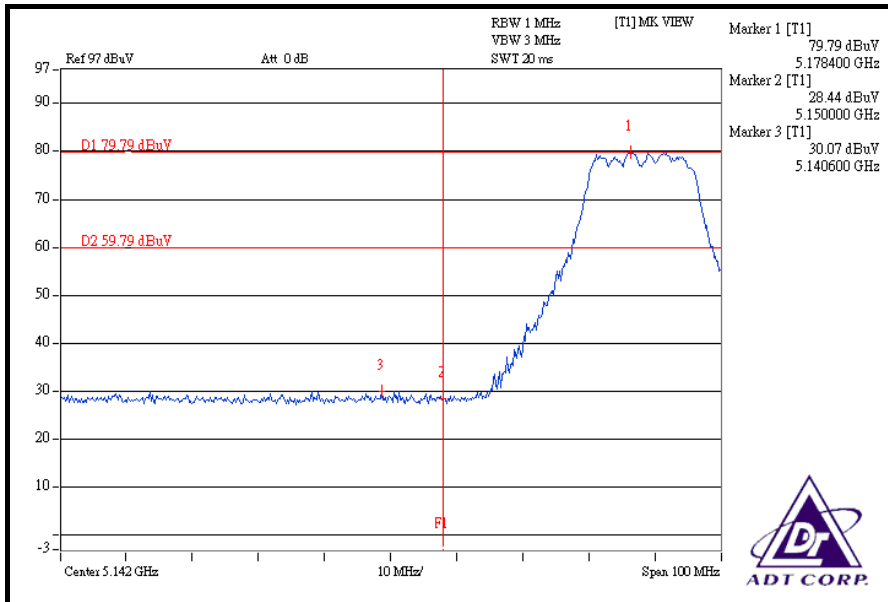

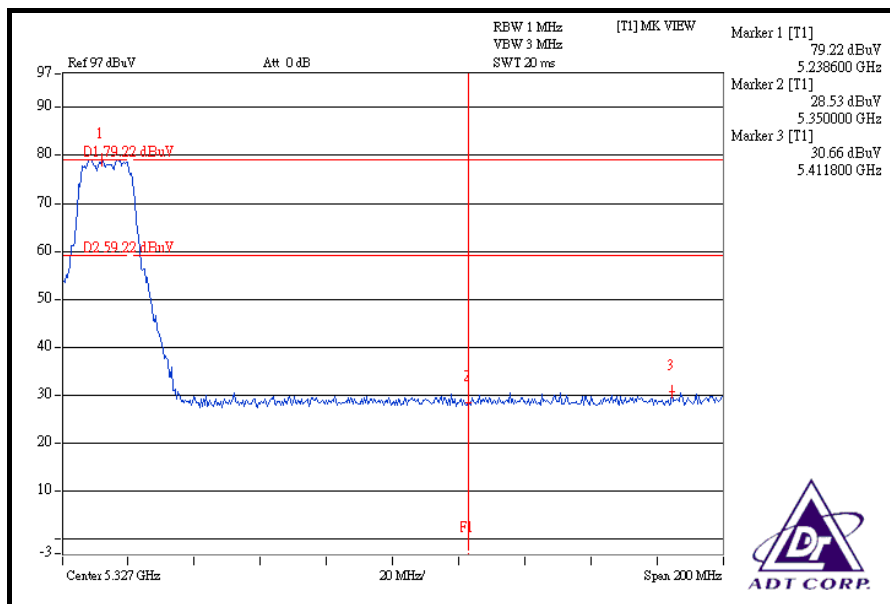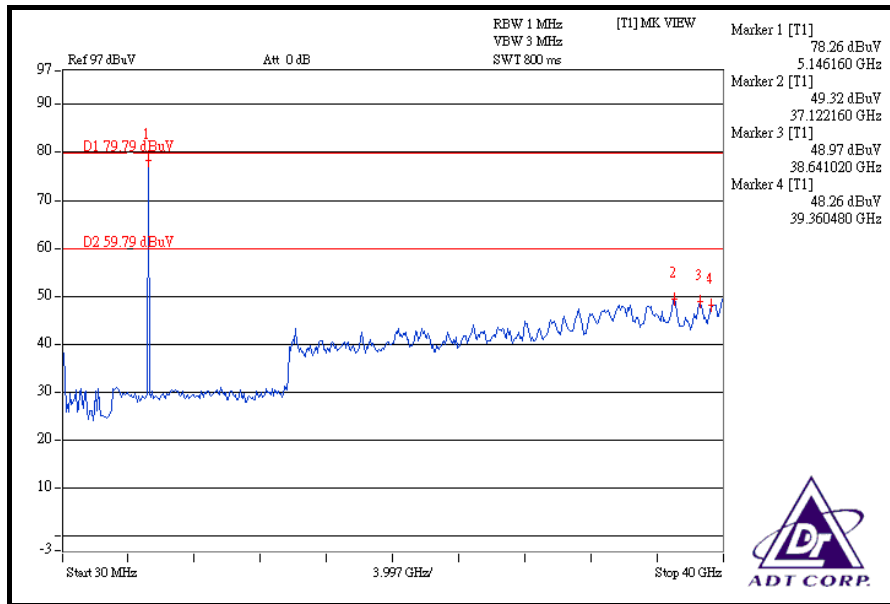

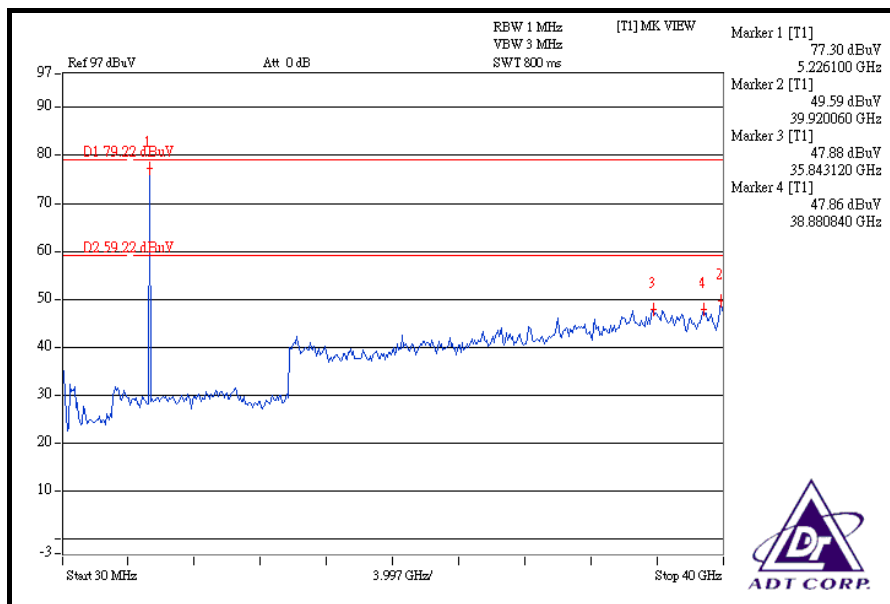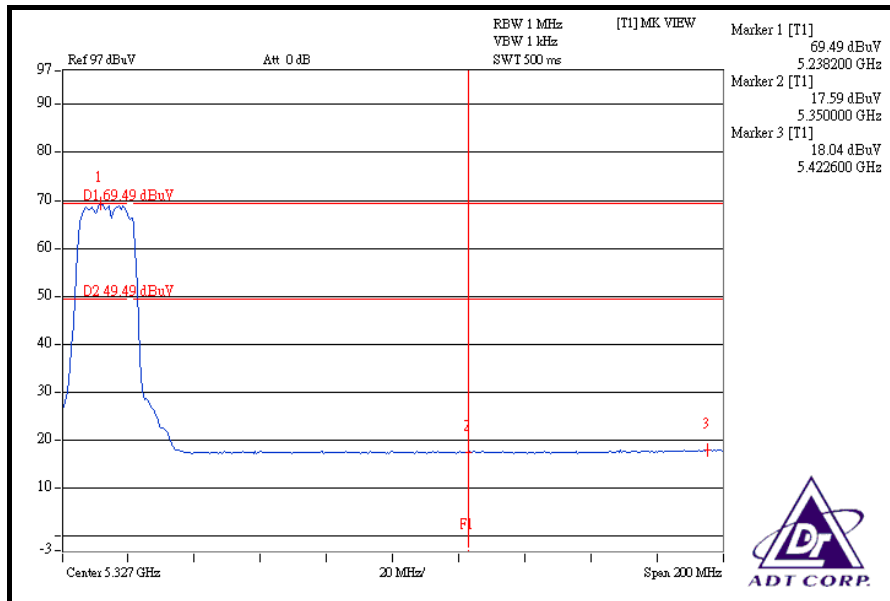

DRAFT 802.11n (40MHz) OFDM MODULATION

Channel 38 (5190MHz)



The band edge emission plot on the next page shows 39.82dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 38 is 107.13dBuV/m (Peak), so the maximum field strength in restrict band is $107.13 - 39.82 = 67.31$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 45.96dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 38 is 97.02dBuV/m (Average), so the maximum field strength in restrict band is $97.02 - 45.96 = 51.06$ dBuV/m which is under 54dBuV/m limit.



Channel 46 (5230MHz)

The band edge emission plot on the next second page shows 48.45dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 46 is 106.98dBuV/m (Peak), so the maximum field strength in restrict band is $106.98 - 48.45 = 58.53$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 50.10dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 46 is 96.37dBuV/m (Average), so the maximum field strength in restrict band is $96.37 - 50.10 = 46.27$ dBuV/m which is under 54dBuV/m limit.

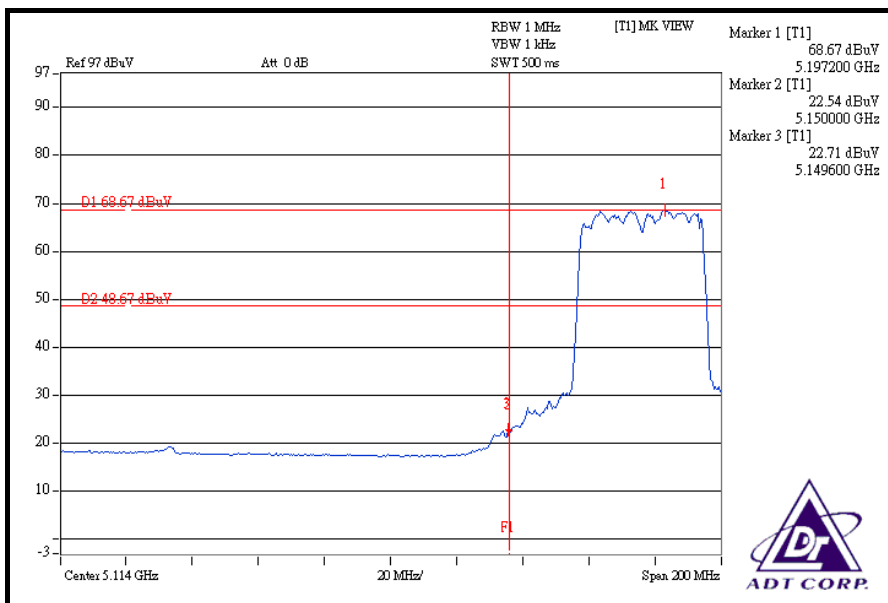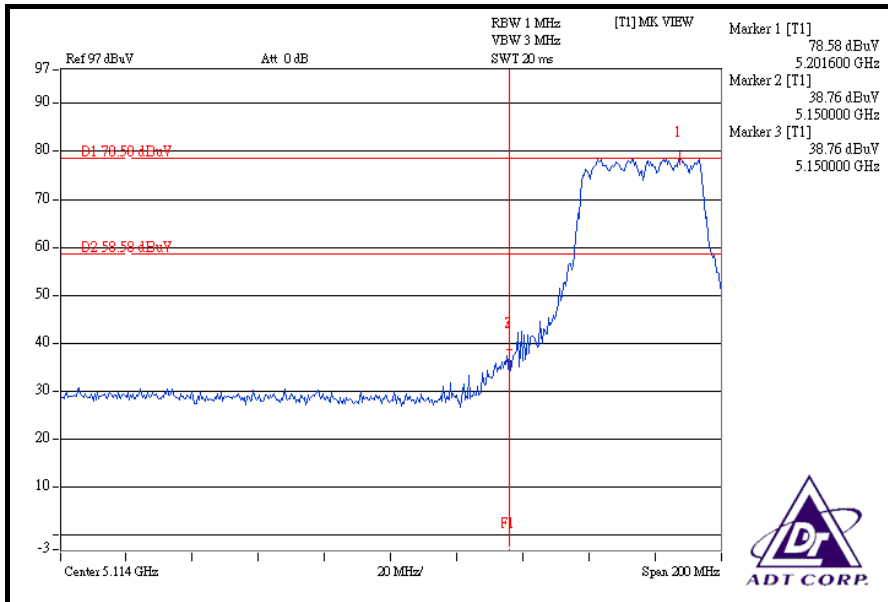

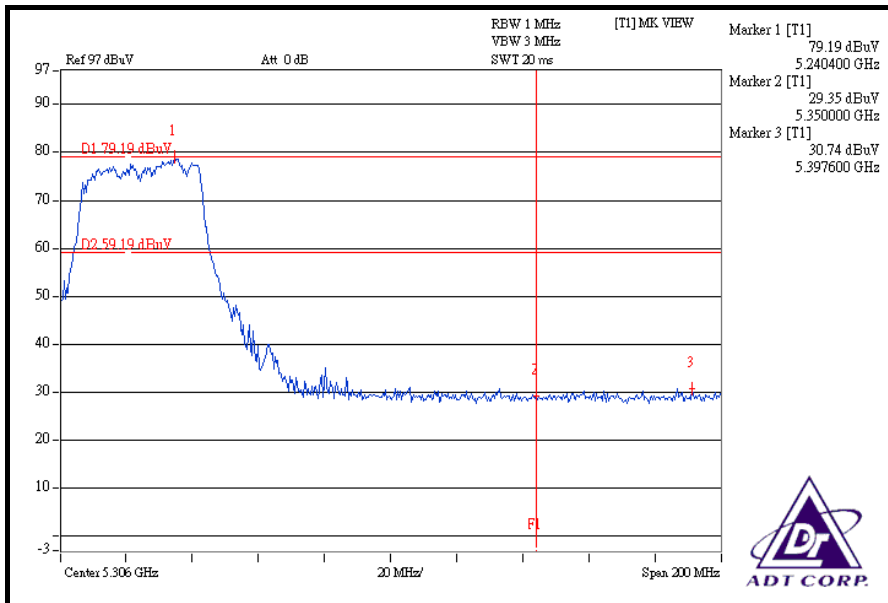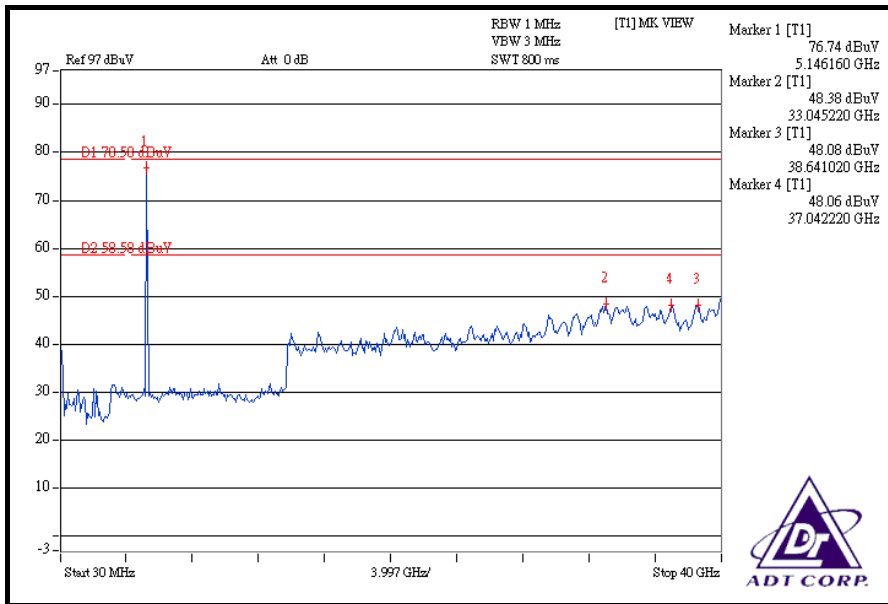

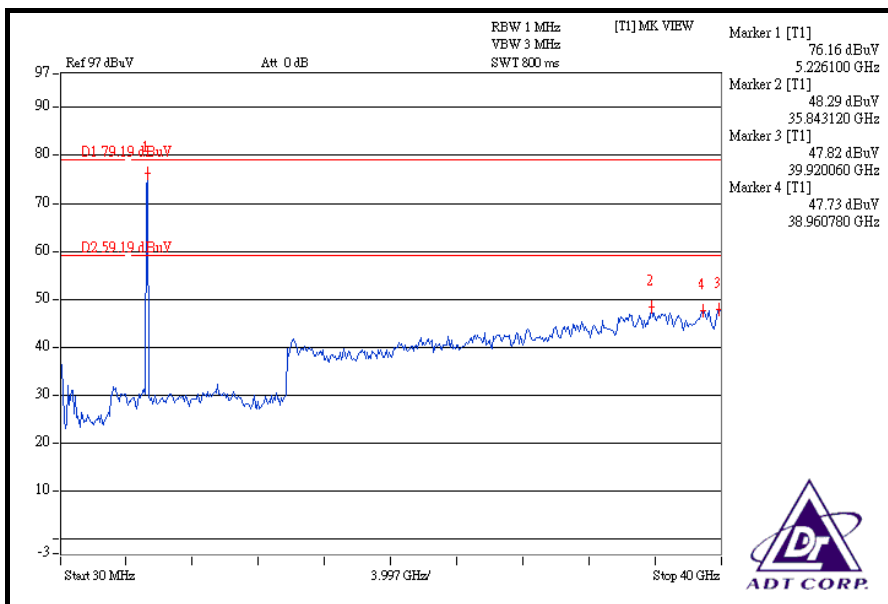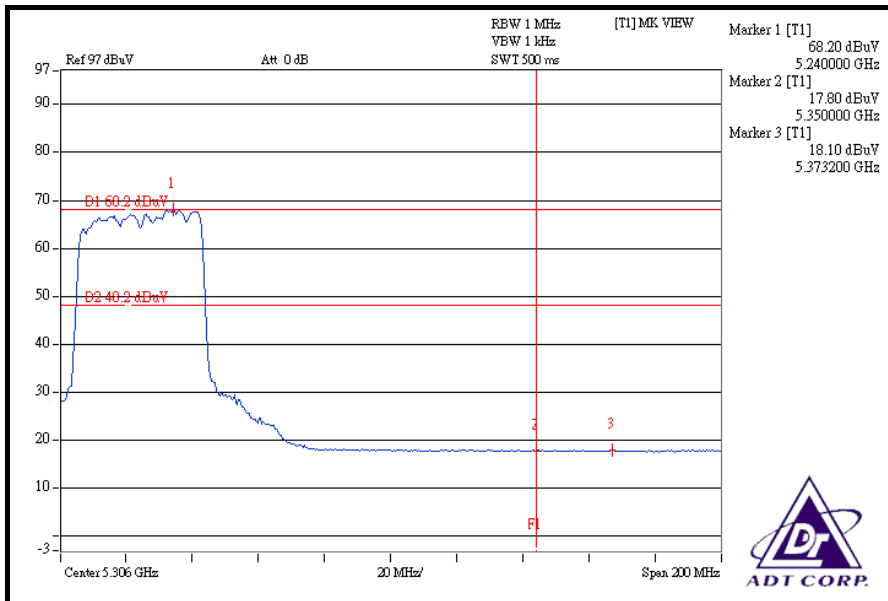



4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with R-SMA connector. The maximum Gain of the antenna is 2dBi.



5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:
www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.