



FCC TEST REPORT

REPORT NO.: RF920107R02

MODEL NO.: DWL-800AP+, DWL-810+

RECEIVED: Jan. 7, 2003

TESTED: Jan. 7~ Jan. 21, 2003

APPLICANT: D-LINK Corporation

ADDRESS: No.8, Li- Hsin VII Road, Science Based Industrial
Park Hsin-Chu, Taiwan

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 67 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS.....	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD.....	10
4.1.5	TEST SETUP.....	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT.....	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS.....	19
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD.....	20
4.2.5	TEST SETUP.....	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS	22
4.3	6DB BANDWIDTH MEASUREMENT	27
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	27
4.3.2	TEST INSTRUMENTS.....	27
4.3.3	TEST PROCEDURE.....	28
4.3.4	DEVIATION FROM TEST STANDARD.....	28
4.3.5	TEST SETUP.....	28
4.3.6	EUT OPERATING CONDITIONS	28
4.3.7	TEST RESULTS	29
4.3.8	TEST RESULTS	33
4.3.9	TEST RESULTS	37
4.4	MAXIMUM PEAK OUTPUT POWER.....	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	41
4.4.2	INSTRUMENTS.....	41
4.4.3	TEST PROCEDURES	42
4.4.4	DEVIATION FROM TEST STANDARD.....	42
4.4.5	TEST SETUP.....	42
4.4.6	EUT OPERATING CONDITIONS	42
4.4.7	TEST RESULTS	43
4.4.8	TEST RESULTS	44
4.4.9	TEST RESULTS	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT	46



4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	46
4.5.2	TEST INSTRUMENTS.....	46
4.5.3	TEST PROCEDURE.....	47
4.5.4	DEVIATION FROM TEST STANDARD.....	47
4.5.5	TEST SETUP.....	47
4.5.6	EUT OPERATING CONDITION.....	47
4.5.7	TEST RESULTS	48
4.5.8	TEST RESULTS	52
4.5.9	TEST RESULTS	56
4.6	BAND EDGES MEASUREMENT	60
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	60
4.6.2	TEST INSTRUMENTS.....	60
4.6.3	TEST PROCEDURE.....	60
4.6.4	DEVIATION FROM TEST STANDARD.....	60
4.6.5	EUT OPERATING CONDITION.....	61
4.6.6	TEST RESULTS	61
4.7	ANTENNA REQUIREMENT	64
4.7.1	STANDARD APPLICABLE	64
4.7.2	ANTENNA CONNECTED CONSTRUCTION	64
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	65
6	INFORMATION ON THE TESTING LABORATORIES.....	67



1 CERTIFICATION

PRODUCT NAME : Enhance 2.4GHz Ethernet Wireless Bridge,
Enhance 2.4GHz Range Extender
BRAND NAME : D-Link
MODEL NO. : DWL-800AP+, DWL-810+
APPLICANT : D-LINK Corporation
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Jan. 7~ Jan. 21, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Kelsey Chang **DATE:** Jan. 22, 2003
Kelsey Chang

APPROVED BY: Dr. Alan Lane for **DATE:** Jan. 22, 2003
Dr. Alan Lane
Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -2.39dBuV at 0.218MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.20dBuV at 2088.00 / 2483.50MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender
MODEL NO.	DWL-800AP+, DWL-810+
POWER SUPPLY	5.0VDC from Adapter
MODULATION TYPE	BPSK, QPSK, CCK, PBCC (DSSS)
TRANSFER RATE	1/2/5.5/11/22Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	17.03dBm
ANTENNA TYPE	Dipole antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was operated with following Adapter

Model No.:	MA1-10050
Input power :	100-120V-0.5A,50-60Hz
Output power :	+5.0VDC----2.5A

2. Two models are identical except their outer appearance.
3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. This EUT data can be up to 22Mbps that to be worse case, was chosen to do the final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	Dell	PP01L	TW-09C748-12800-19O-B220	FCC DoC APPROVED
2	USB 10/100 Fast Ethernet	D-Link	DU-E100	UR15001597	FCC DoC APPROVED

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 03, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 02, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 02, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. “*”: These equipment are used for conducted telecom port test only (if tested).
3. The test was performed in ADT Shielded Room No. 2.
4. The VCCI Site Registration No. is C-240.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

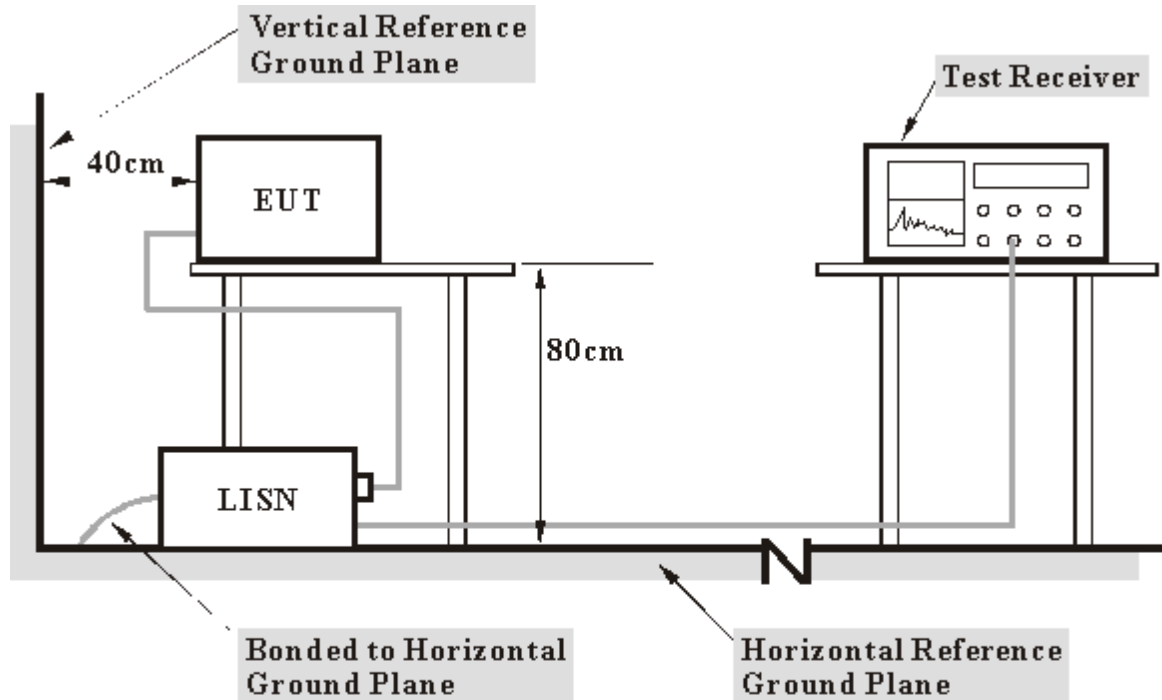

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ 45 cable.
- d. The communication partner sent data to EUT by command "PIN".




4.1.7 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	21deg.C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	62.18	42.17	62.28	42.27	66.00	56.00	-3.72	-13.73
2	0.220	0.10	52.85	46.63	52.95	46.73	62.82	52.82	-9.87	-6.09
3	0.291	0.10	50.67	38.41	50.77	38.51	60.50	50.50	-9.73	-11.99
4	0.441	0.10	47.01	21.45	47.11	21.55	57.04	47.04	-9.93	-25.49
5	0.585	0.10	42.23	-	42.33	-	56.00	46.00	-13.67	-
6	23.126	1.26	49.28	45.00	50.54	46.26	60.00	50.00	-9.46	-3.74

- Remarks:
1. "**": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

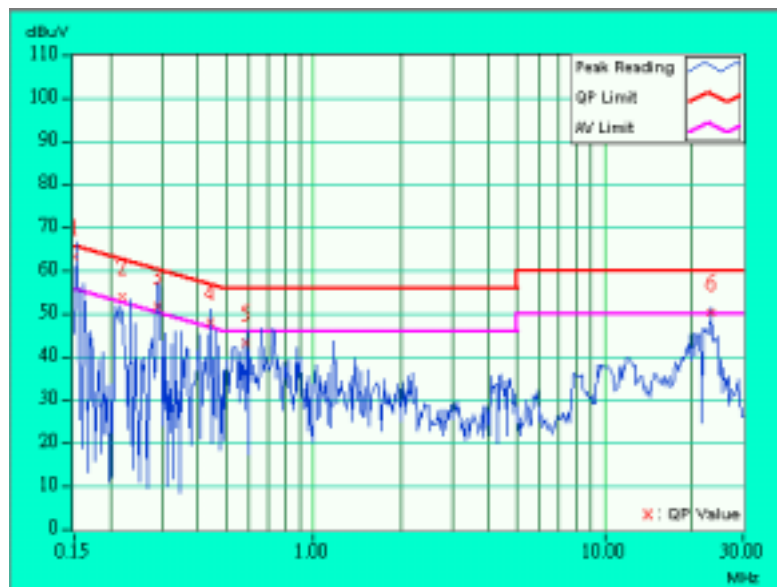




EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	21deg.C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	62.44	49.28	62.54	49.38	66.00	56.00	-3.46	-6.62
2	0.218	0.10	53.84	50.40	53.94	50.50	62.89	52.89	-8.95	-2.39
3	0.376	0.10	47.00	-	47.10	-	58.36	48.36	-11.26	-
4	0.518	0.10	46.37	14.54	46.47	14.64	56.00	46.00	-9.53	-31.36
5	0.739	0.10	41.81	-	41.91	-	56.00	46.00	-14.09	-
6	23.129	1.13	51.11	46.20	52.24	47.33	60.00	50.00	-7.76	-2.67

- Remarks:
1. "**": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

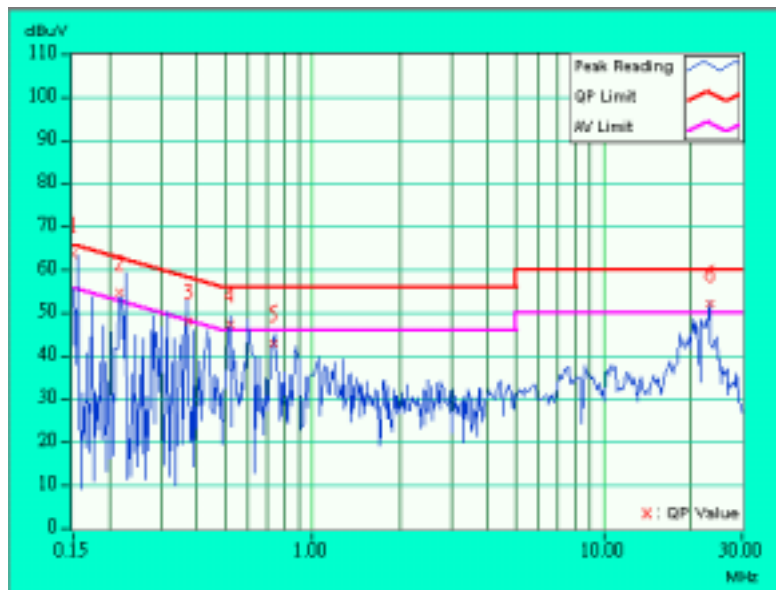




EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	21deg.C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.153	0.10	58.52	34.64	58.62	34.74	65.84	55.84	-7.22	-21.10
2	0.216	0.10	53.96	49.95	54.06	50.05	62.97	52.97	-8.91	-2.92
3	0.297	0.10	51.97	21.04	52.07	21.14	60.33	50.33	-8.26	-29.19
4	0.368	0.10	45.75	-	45.85	-	58.54	48.54	-12.69	-
5	0.441	0.10	43.49	-	43.59	-	57.04	47.04	-13.45	-
6	22.577	1.25	46.70	-	47.95	-	60.00	50.00	-12.05	-

- Remarks:
1. "**": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

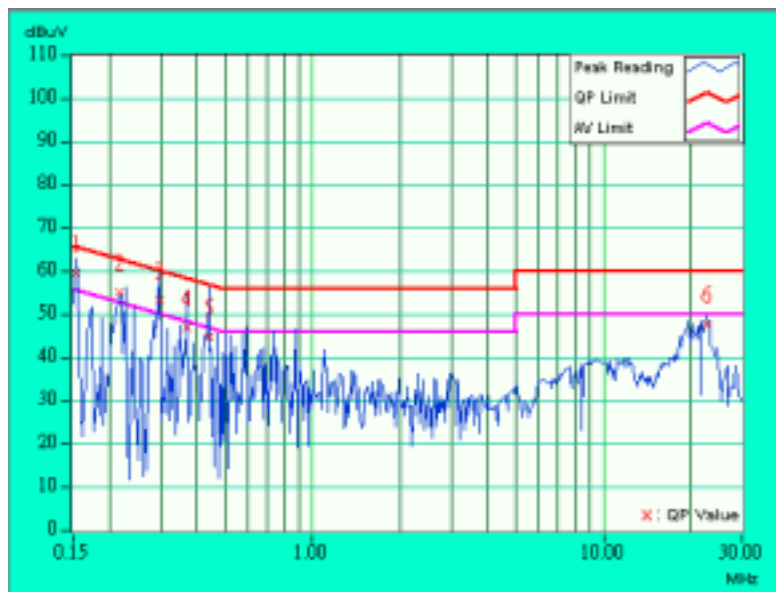




EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	21deg.C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.152	0.10	58.86	34.13	58.96	34.23	65.88	55.88	-6.92	-21.65
2	0.216	0.10	51.16	-	51.26	-	62.97	52.97	-11.71	-
3	0.288	0.10	45.15	-	45.25	-	60.57	50.57	-15.32	-
4	0.372	0.10	43.84	-	43.94	-	58.46	48.46	-14.52	-
5	0.512	0.10	44.58	-	44.68	-	56.00	46.00	-11.32	-
6	0.870	0.10	36.84	-	36.94	-	56.00	46.00	-19.06	-

- Remarks:
1. "**": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

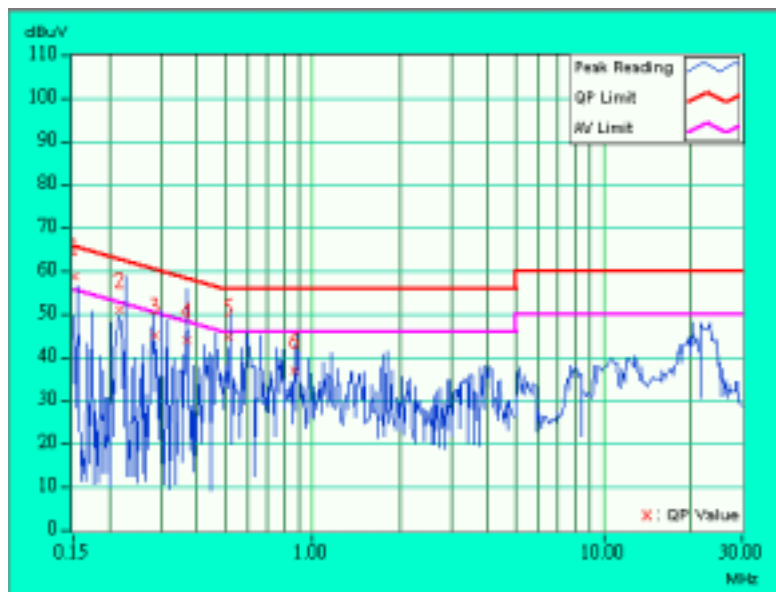




EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	21deg.C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	61.83	43.65	61.93	43.75	66.00	56.00	-4.07	-12.25
2	0.219	0.10	52.18	-	52.28	-	62.86	52.86	-10.58	-
3	0.290	0.10	48.57	-	48.67	-	60.52	50.52	-11.85	-
4	0.364	0.10	41.57	-	41.67	-	58.64	48.64	-16.97	-
5	0.582	0.10	41.10	-	41.20	-	56.00	46.00	-14.80	-
6	22.211	1.24	45.51	-	46.75	-	60.00	50.00	-13.25	-

- Remarks:
1. "**": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

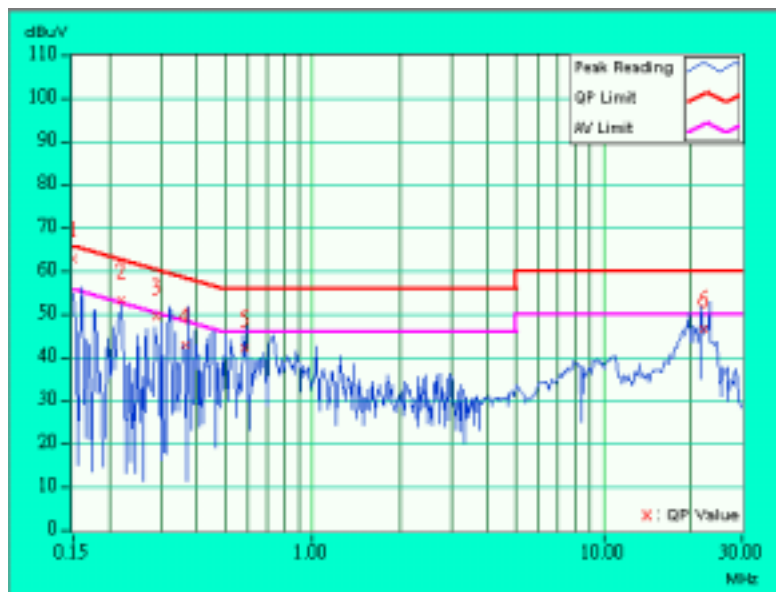




EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	21deg.C, 63%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.150	0.10	58.80	38.94	58.90	39.04	66.00	56.00	-7.10	-16.96
2	0.222	0.10	49.27	-	49.37	-	62.74	52.74	-13.37	-
3	0.309	0.10	46.00	-	46.10	-	60.00	50.00	-13.90	-
4	0.440	0.10	46.19	-	46.29	-	57.06	47.06	-10.77	-
5	0.651	0.10	32.84	-	32.94	-	56.00	46.00	-23.06	-
6	23.129	1.13	49.30	44.80	50.43	45.93	60.00	50.00	-9.57	-4.07

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

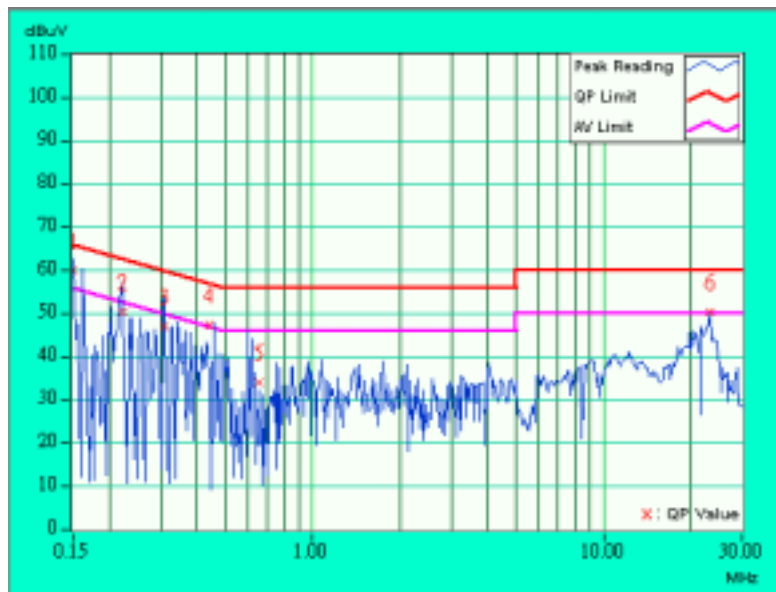



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3520A00667	Aug. 26, 2003
CHASE Preamplifier	CPA9231A/4	3215	Nov. 06, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESVS10	846285/012	Sept. 16, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112B	2751	March 30, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 3, 2003
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* CHANCE Turn Table & Tower Controller	ACS-I	NA	NA
* Software	ADT_Radiated_V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M51167	Aug. 21, 2003
* TIMES RF cable	LMR-600	CABLE-ST6-01	Aug. 21, 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Open Site No. 6.
 5. The VCCI Site Registration No. is R-728.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

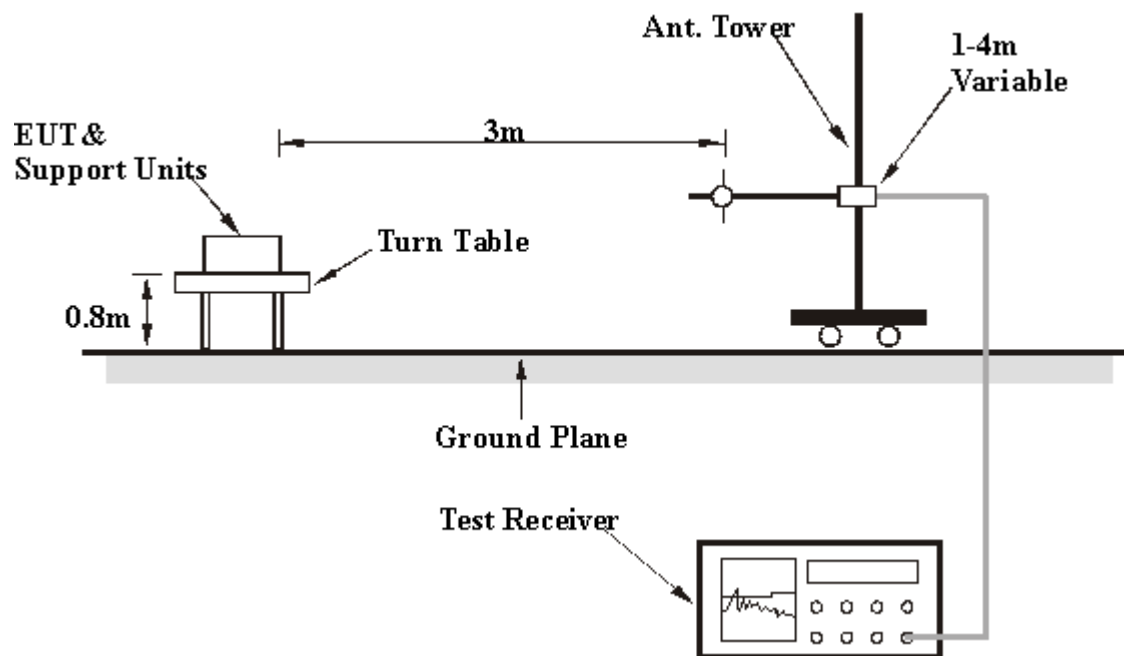

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	24.6 QP	43.50	-18.90	1.15 H	125	12.10	12.60
2	150.00	26.0 QP	43.50	-17.50	1.75 H	158	14.60	11.40
3	175.00	30.2 QP	43.50	-13.30	1.45 H	220	20.00	10.20
4	176.00	27.2 QP	43.50	-16.20	1.54 H	200	17.10	10.10
5	225.00	28.7 QP	46.00	-17.30	1.64 H	245	17.00	11.70
6	250.00	30.7 QP	46.00	-15.30	1.35 H	274	17.50	13.20
7	375.00	33.2 QP	46.00	-12.80	1.32 H	112	16.60	16.70
8	500.00	36.2 QP	46.00	-9.80	1.11 H	317	16.90	19.40
9	525.00	30.2 QP	46.00	-15.80	1.50 H	100	10.20	20.00
10	575.00	37.6 QP	46.00	-8.40	1.62 H	112	16.50	21.10
11	625.00	32.0 QP	46.00	-14.00	1.15 H	160	10.60	21.40
12	704.00	27.6 QP	46.00	-18.40	1.00 H	247	6.00	21.60
13	748.00	31.8 QP	46.00	-14.20	1.98 H	212	9.50	22.30
14	750.00	36.4 QP	46.00	-9.60	1.00 H	125	14.00	22.30
15	800.00	31.2 QP	46.00	-14.80	1.37 H	110	8.50	22.80
16	836.00	30.2 QP	46.00	-15.80	1.55 H	223	7.20	23.10



EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	37.0 QP	43.50	-6.50	1.45 V	292	24.40	12.60
2	150.00	34.9 QP	43.50	-8.60	1.55 V	142	23.50	11.40
3	174.98	30.7 QP	43.50	-12.80	1.20 V	62	20.50	10.20
4	176.01	28.3 QP	43.50	-15.20	1.10 V	174	18.20	10.10
5	225.00	28.2 QP	46.00	-17.80	1.32 V	112	16.50	11.70
6	250.00	36.2 QP	46.00	-9.80	1.00 V	46	23.00	13.20
7	375.00	34.3 QP	46.00	-11.70	1.25 V	46	17.60	16.70
8	500.00	36.5 QP	46.00	-9.50	1.56 V	193	17.10	19.40
9	525.00	33.9 QP	46.00	-12.10	1.25 V	118	13.90	20.00
10	575.00	37.2 QP	46.00	-8.80	1.68 V	204	16.10	21.10
11	625.00	39.3 QP	46.00	-6.70	1.25 V	200	17.90	21.40
12	704.00	30.8 QP	46.00	-15.20	1.12 V	70	9.20	21.60
13	748.00	37.2 QP	46.00	-8.80	1.25 V	186	14.90	22.30
14	750.00	36.6 QP	46.00	-9.40	1.12 V	194	14.30	22.30
15	800.00	28.3 QP	46.00	-17.70	1.57 V	280	5.50	22.80

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
 - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 - 3 The other emission levels were very low against the limit.
 - 4 Margin value = Emission level - Limit value



EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	53.2 PK	74.00	-20.80	1.00 H	122	20.30	32.90
1	2038.00	51.5 AV	54.00	-2.50	1.00 H	122	18.60	32.90
2	2375.32	60.3 PK	74.00	-13.70	1.25 H	52	27.20	33.10
2	2375.32	49.3 AV	54.00	-4.70	1.25 H	52	16.20	33.10
3	*2412.00	101.8 PK			1.25 H	52	68.60	33.10
3	*2412.00	93.1 AV			1.25 H	52	60.00	33.10
4	4076.00	44.5 PK	74.00	-29.50	1.41 H	332	5.40	39.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	50.7 PK	74.00	-23.30	1.22 V	18	17.80	32.90
1	2038.00	48.5 AV	54.00	-5.50	1.22 V	18	15.60	32.90
2	2373.65	62.7 PK	74.00	-11.30	1.18 V	198	29.60	33.10
2	2373.65	51.7 AV	54.00	-2.30	1.18 V	198	18.60	33.10
3	*2412.00	105.3 PK			1.18 V	198	72.20	33.10
3	*2412.00	96.3 AV			1.18 V	198	63.20	33.10
4	4076.16	45.5 PK	74.00	-28.50	1.06 V	132	6.40	39.10

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	53.2 PK	74.00	-20.80	1.17 H	81	20.20	33.00
1	2063.00	51.1 AV	54.00	-2.90	1.17 H	81	18.10	33.00
2	*2437.00	102.9 PK			1.25 H	77	69.60	33.30
2	*2437.00	93.8 AV			1.25 H	77	60.50	33.30
3	4126.00	42.2 PK	74.00	-31.80	1.13 H	287	3.00	39.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	52.4 PK	74.00	-21.60	1.00 V	139	19.40	33.00
1	2063.00	50.8 AV	54.00	-3.20	1.00 V	139	17.80	33.00
2	*2437.00	103.8 PK			1.00 V	60	70.50	33.30
2	*2437.00	95.2 AV			1.00 V	60	62.00	33.30
3	4126.00	43.5 PK	74.00	-30.50	1.51 V	139	4.40	39.10

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	54.2 PK	74.00	-19.80	1.25 H	203	21.10	33.10
1	2088.00	51.8 AV	54.00	-2.20	1.25 H	203	18.60	33.10
2	*2462.00	105.4 PK			1.15 H	220	72.00	33.40
2	*2462.00	96.6 AV			1.15 H	220	63.20	33.40
3	2483.50	63.1 PK	74.00	-10.90	1.15 H	220	29.60	33.50
3	2483.50	51.5 AV	54.00	-2.50	1.15 H	220	18.00	33.50
4	4176.00	43.1 PK	74.00	-30.90	1.15 H	115	4.10	38.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	53.9 PK	74.00	-20.10	1.23 V	156	20.80	33.10
1	2088.00	51.4 AV	54.00	-2.60	1.23 V	156	18.30	33.10
2	*2462.00	104.7 PK			1.00 V	60	71.30	33.40
2	*2462.00	95.7 AV			1.00 V	60	62.40	33.40
3	2483.50	60.8 PK	74.00	-13.20	1.00 V	60	27.30	33.50
3	2483.50	51.8 AV	54.00	-2.20	1.00 V	60	18.30	33.50
4	4176.00	47.4 PK	74.00	-26.60	1.05 V	255	8.40	38.90

- NOTE:**
1. Emission level= Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

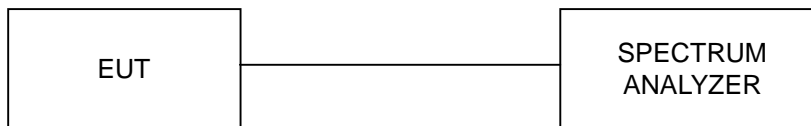

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	22Mbps	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.425	0.5	PASS
6	2437	12.545	0.5	PASS
11	2462	12.665	0.5	PASS




CH1

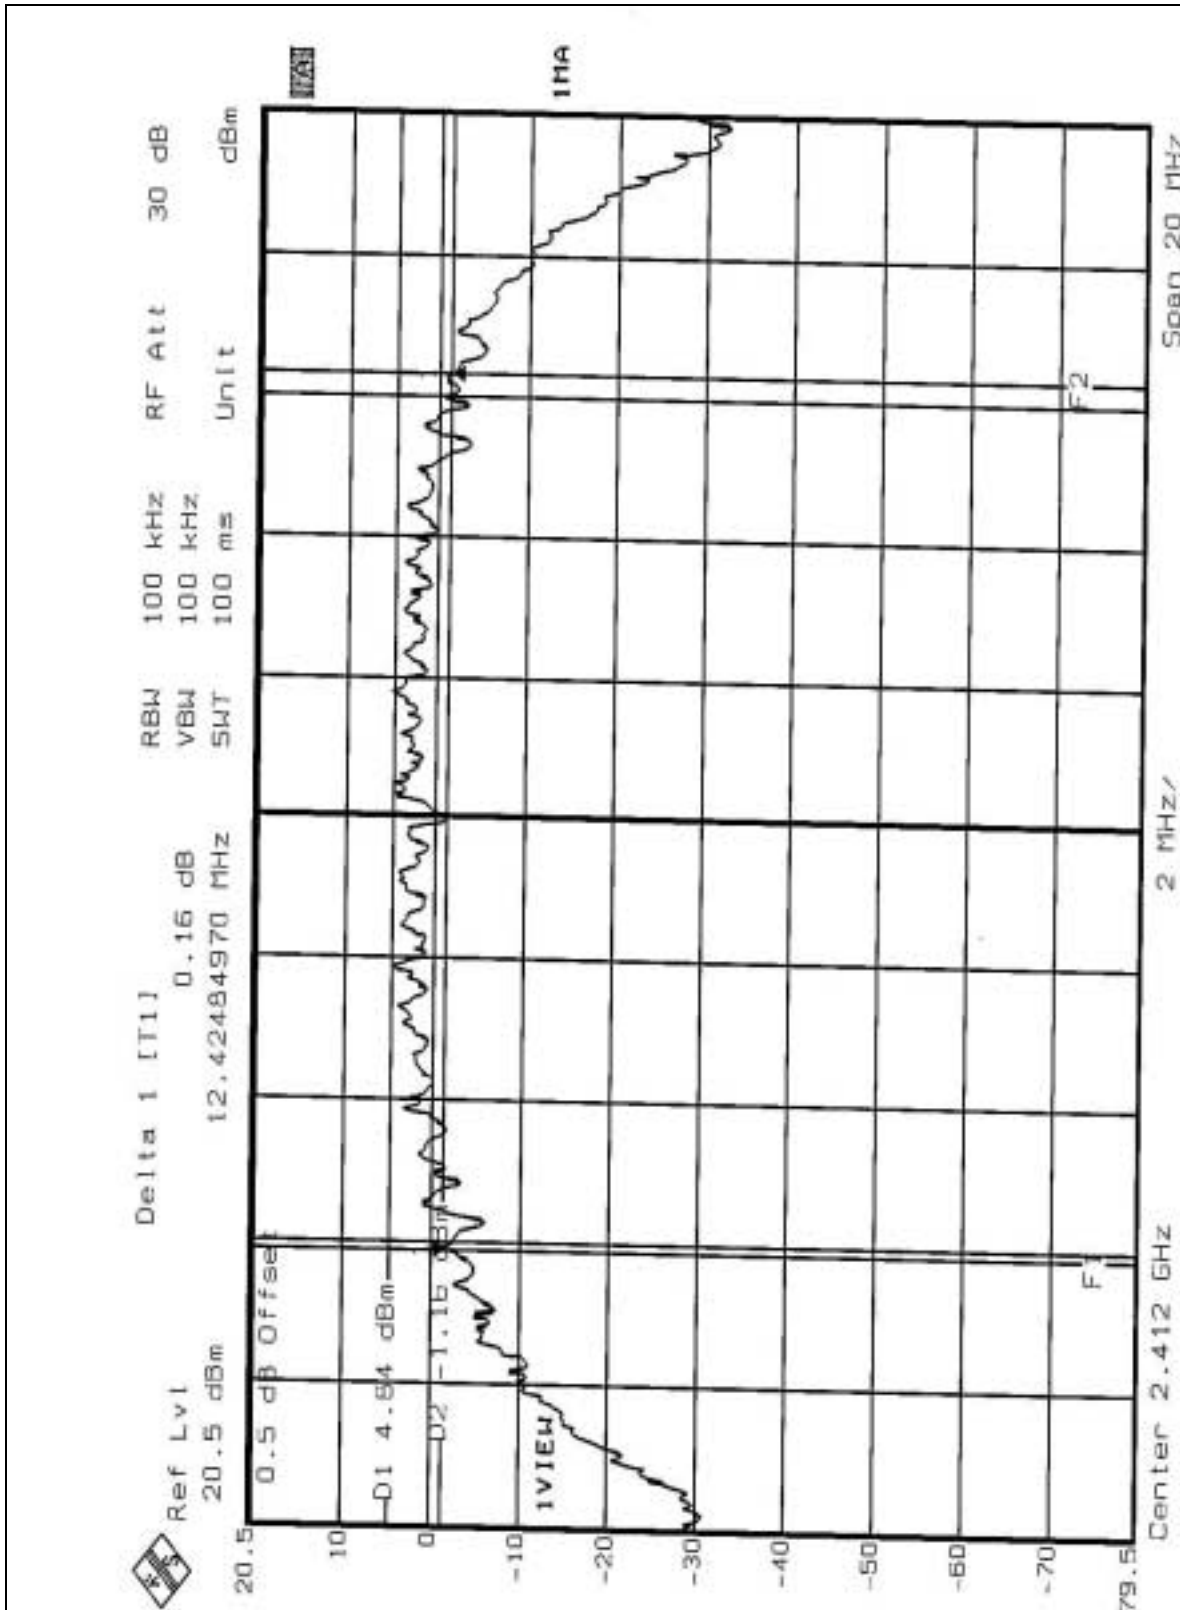




CH6

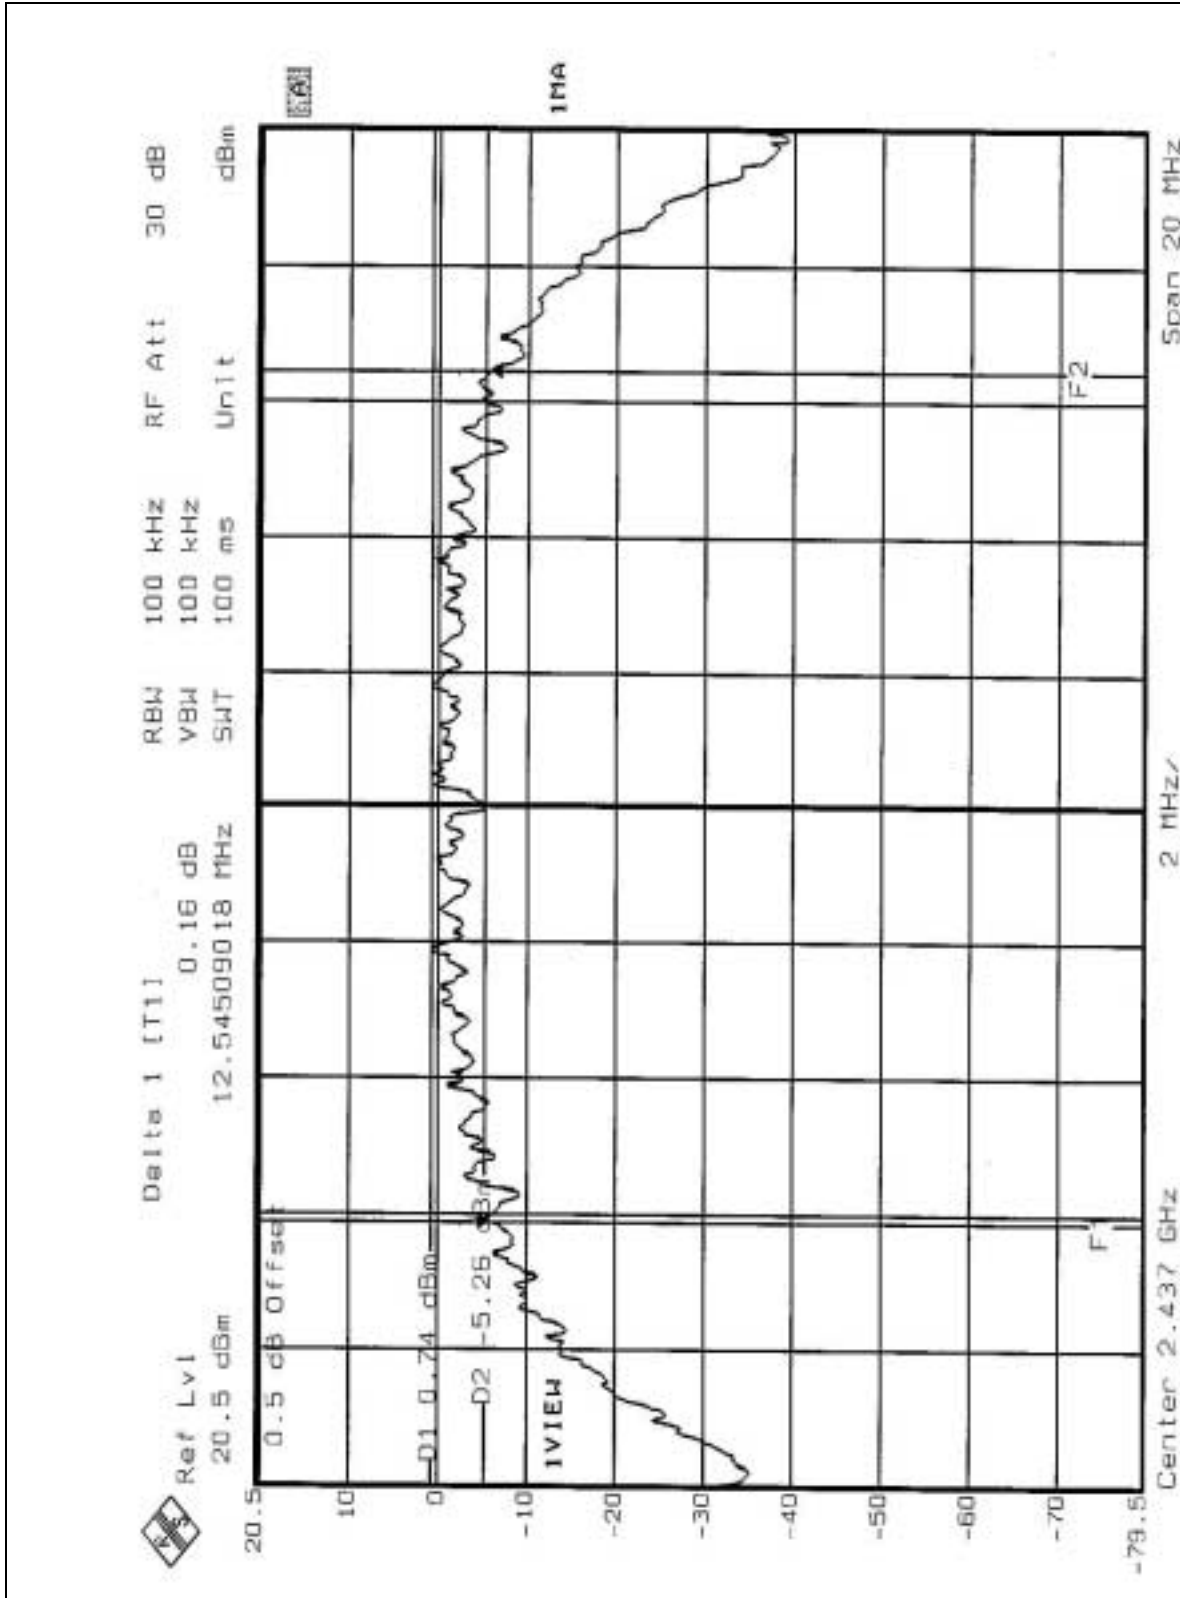



CH11

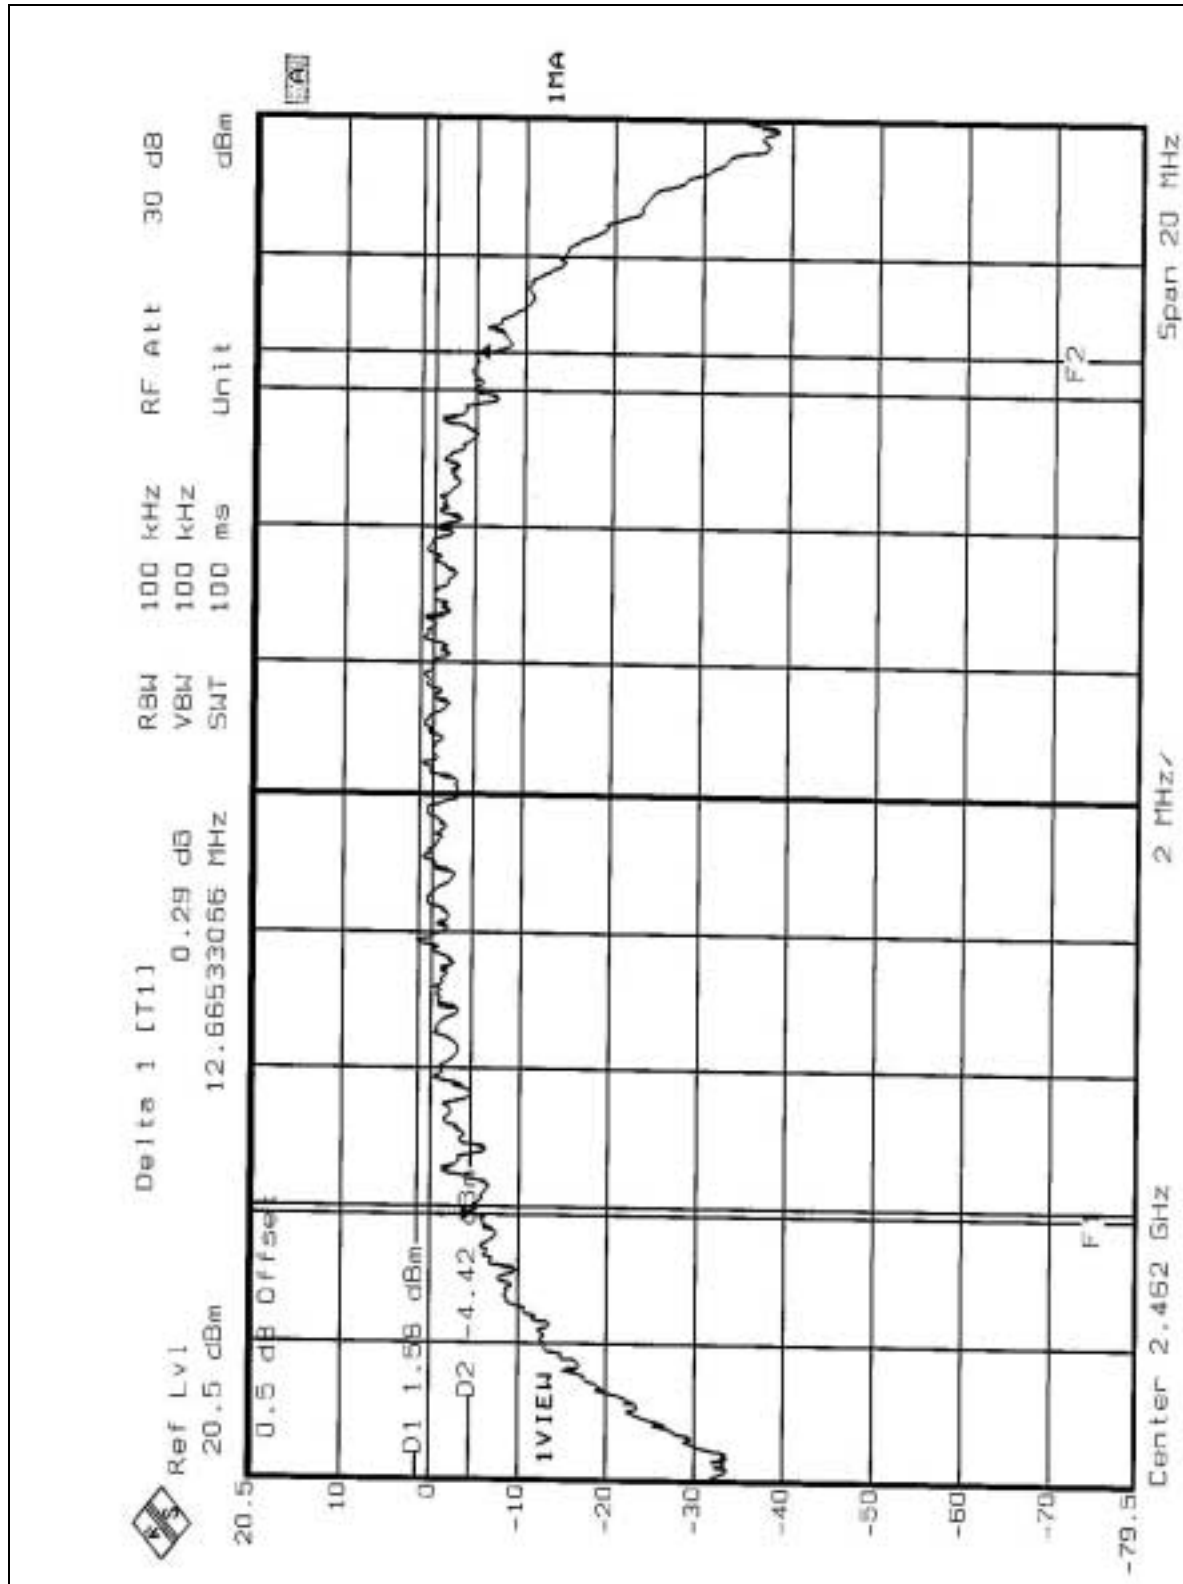




4.3.8 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	2Mbps	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.383	0.5	PASS
6	2437	12.425	0.5	PASS
11	2462	12.385	0.5	PASS




CH1

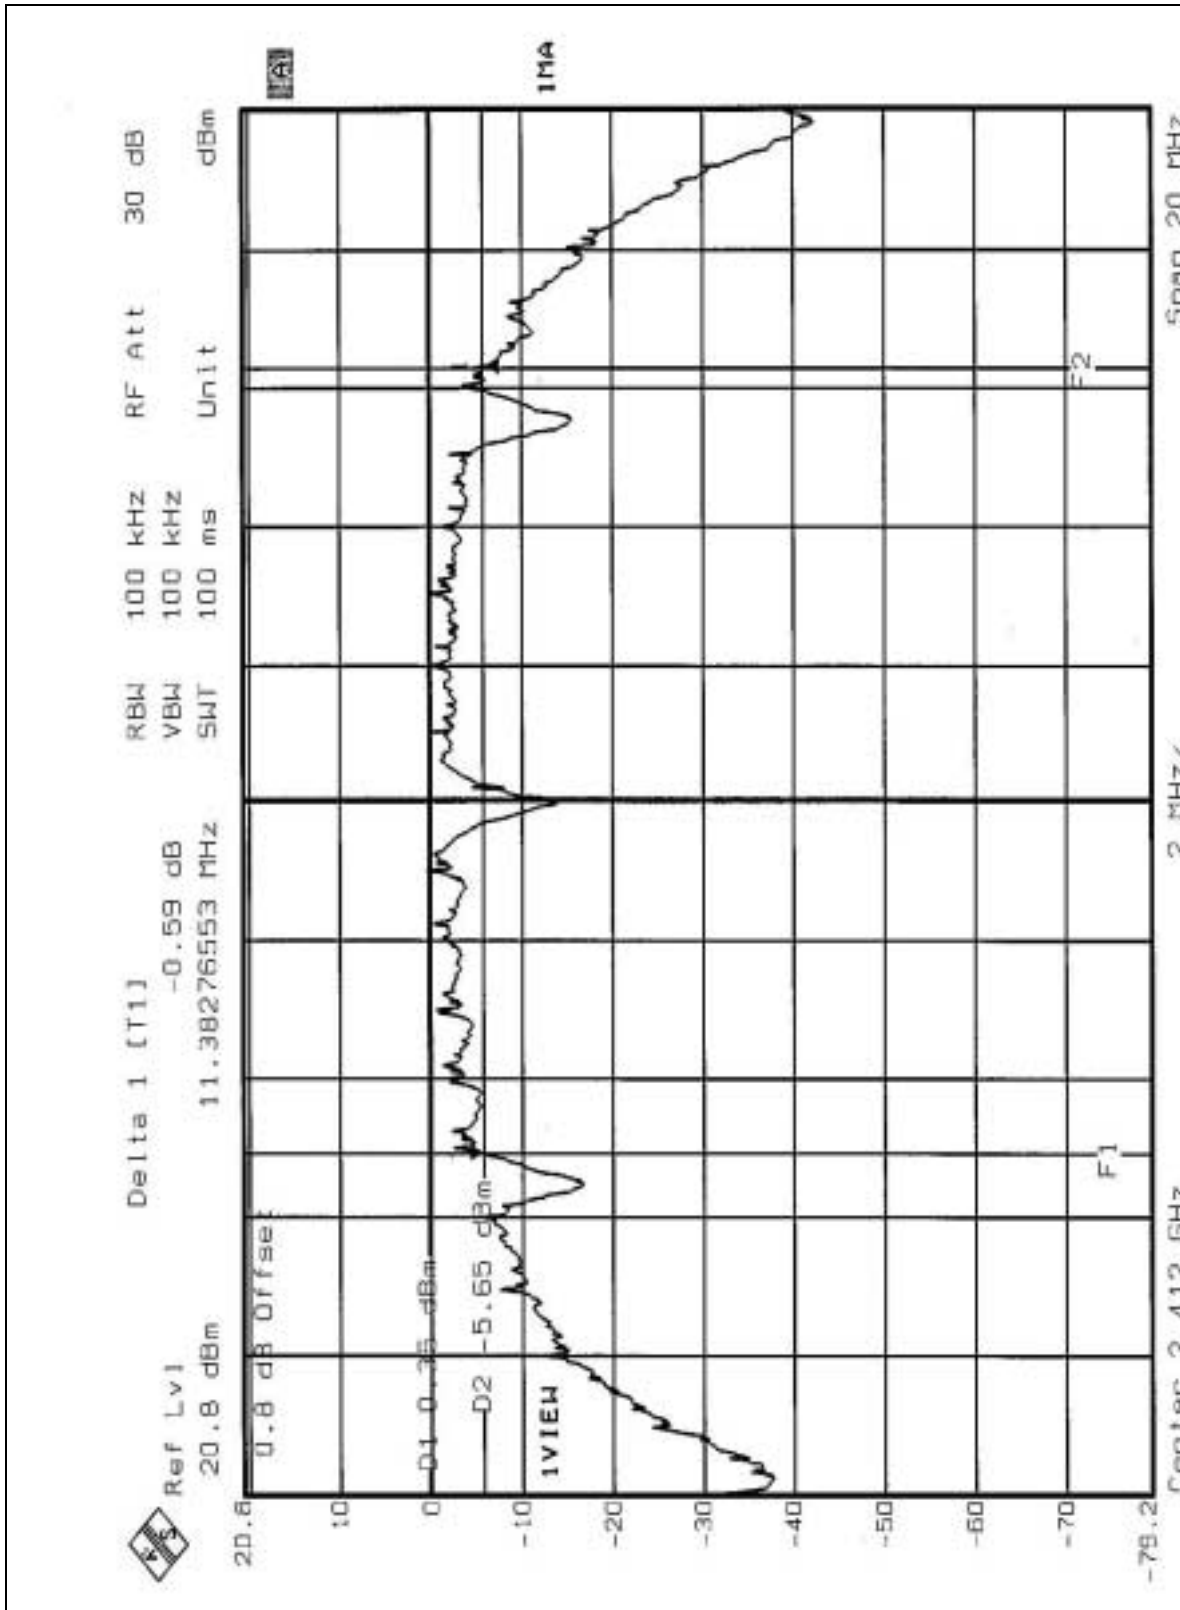




CH6

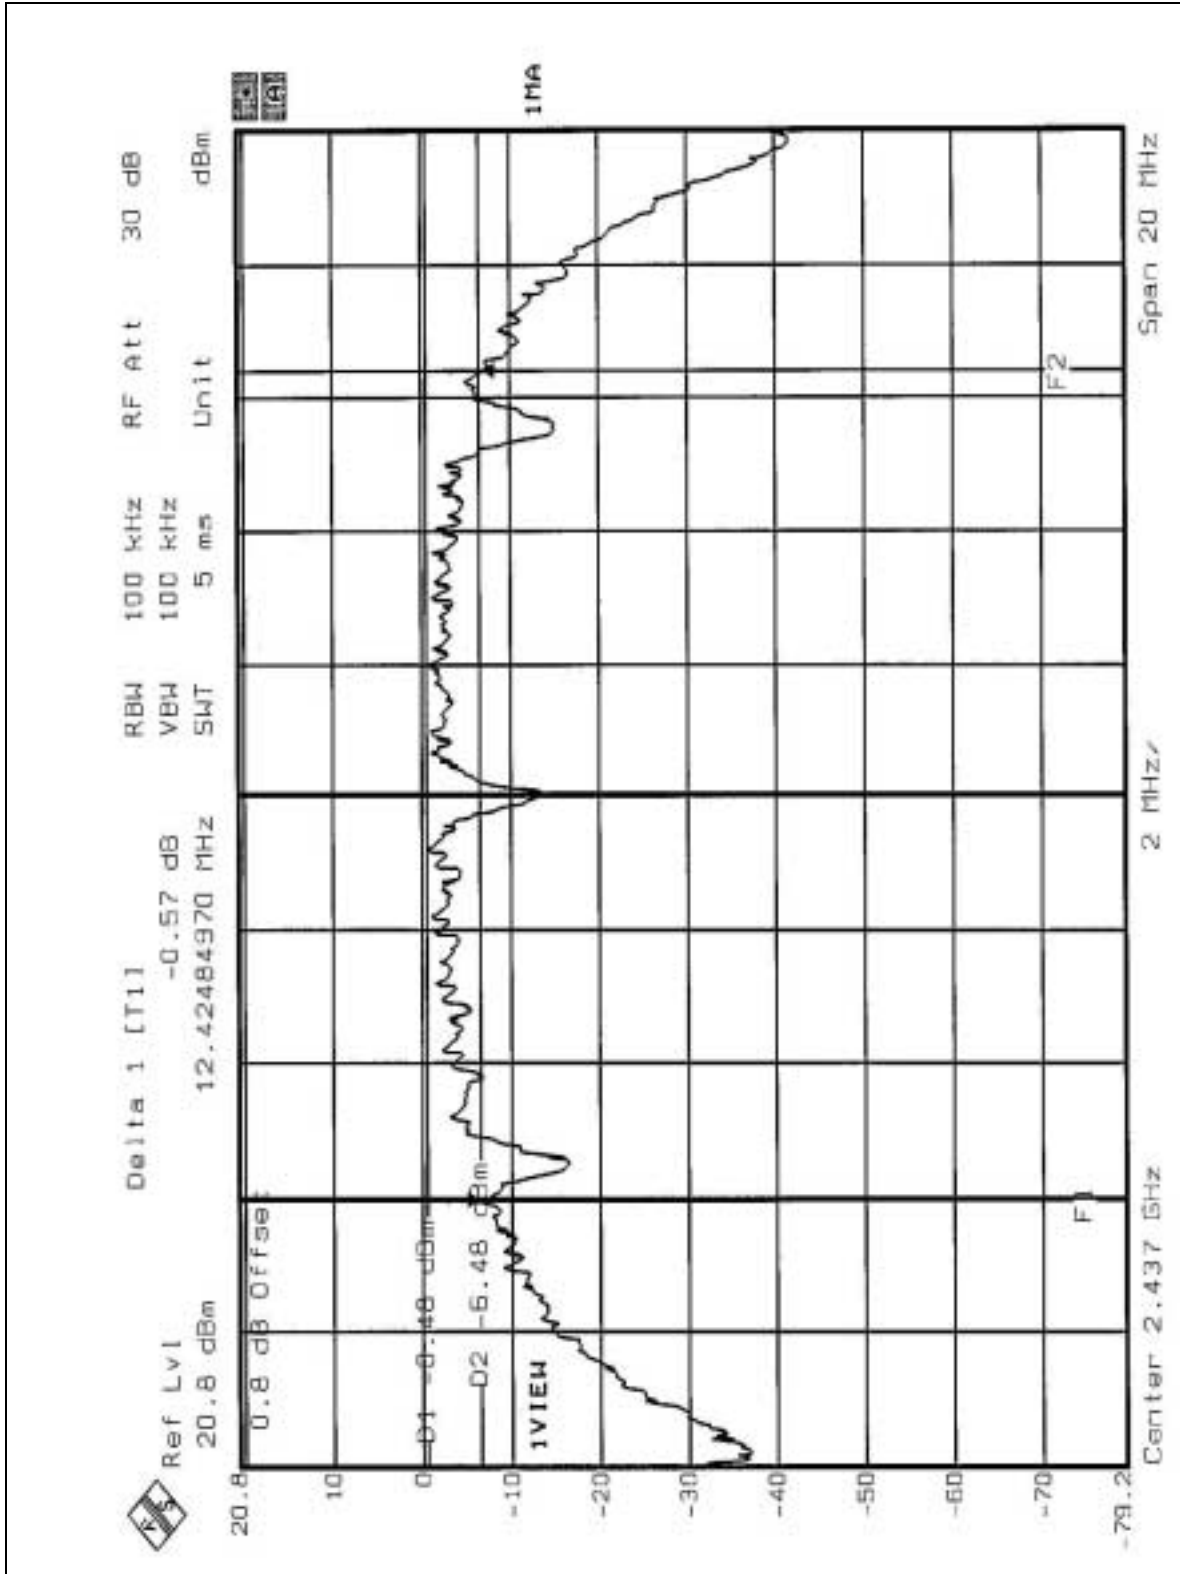



CH11

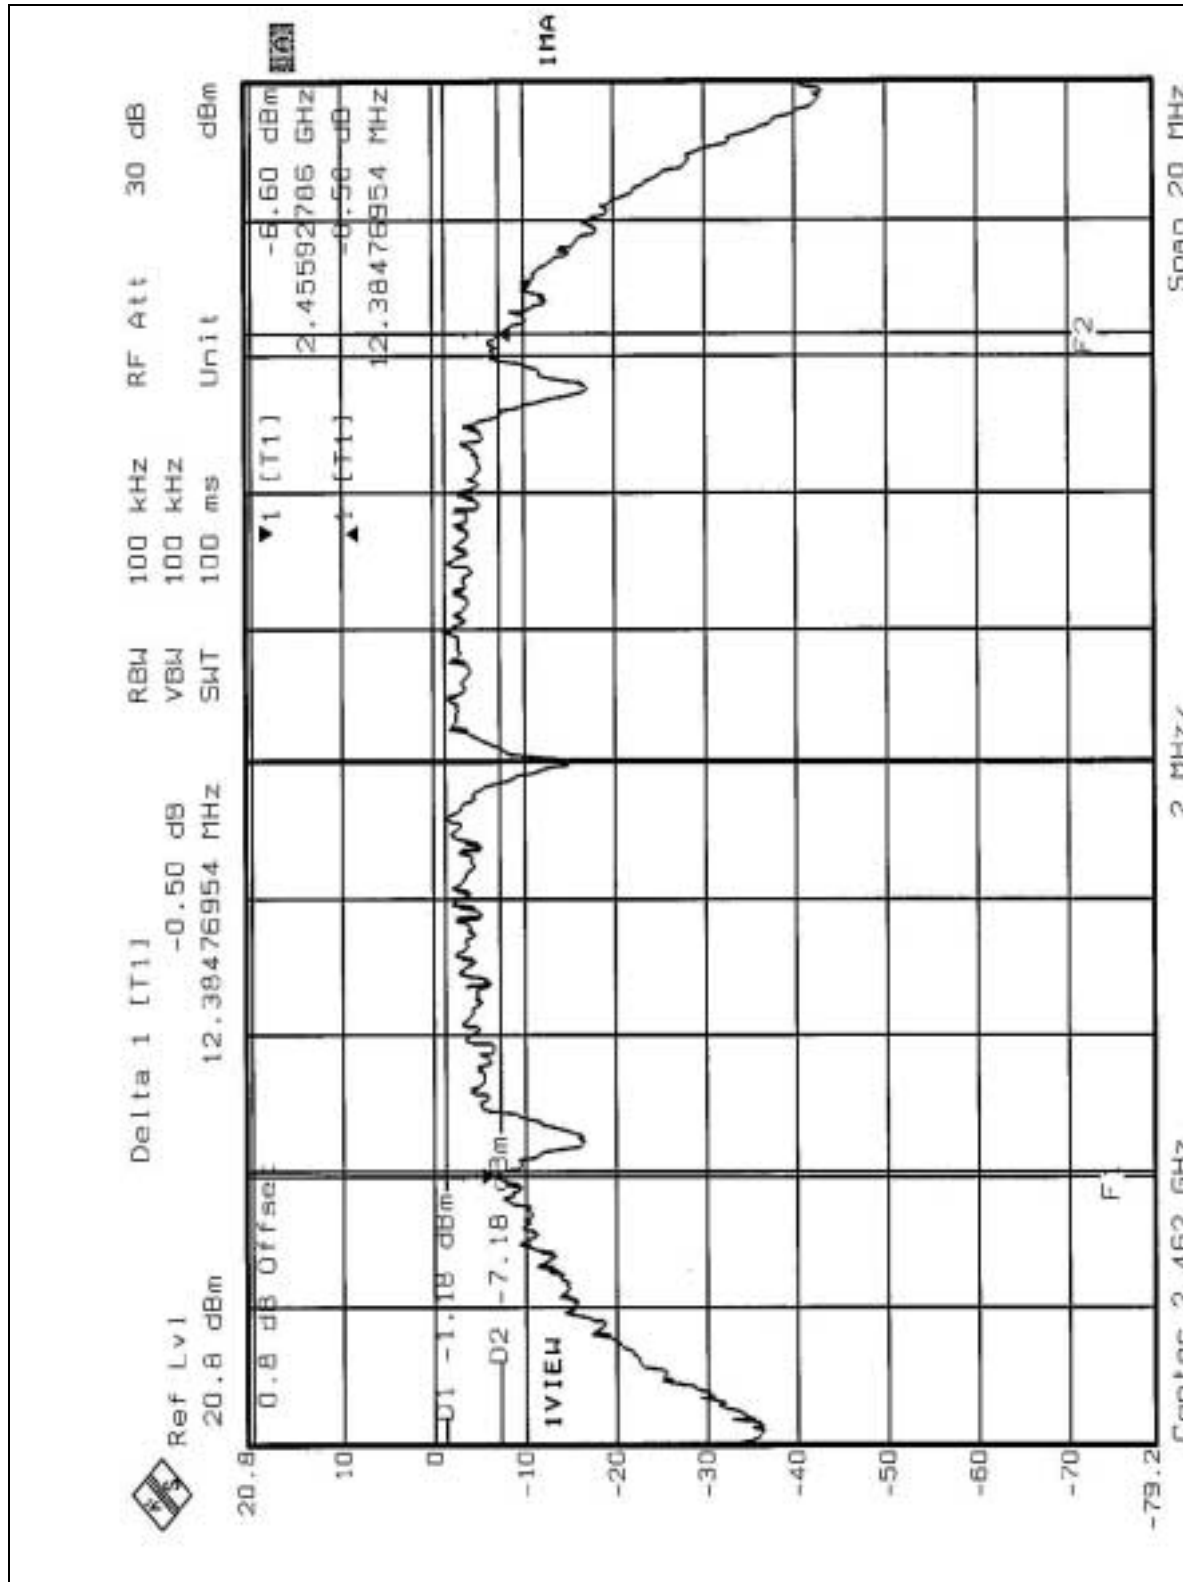




4.3.9 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	11Mbps	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.583	0.5	PASS
6	2437	11.703	0.5	PASS
11	2462	11.543	0.5	PASS




CH1

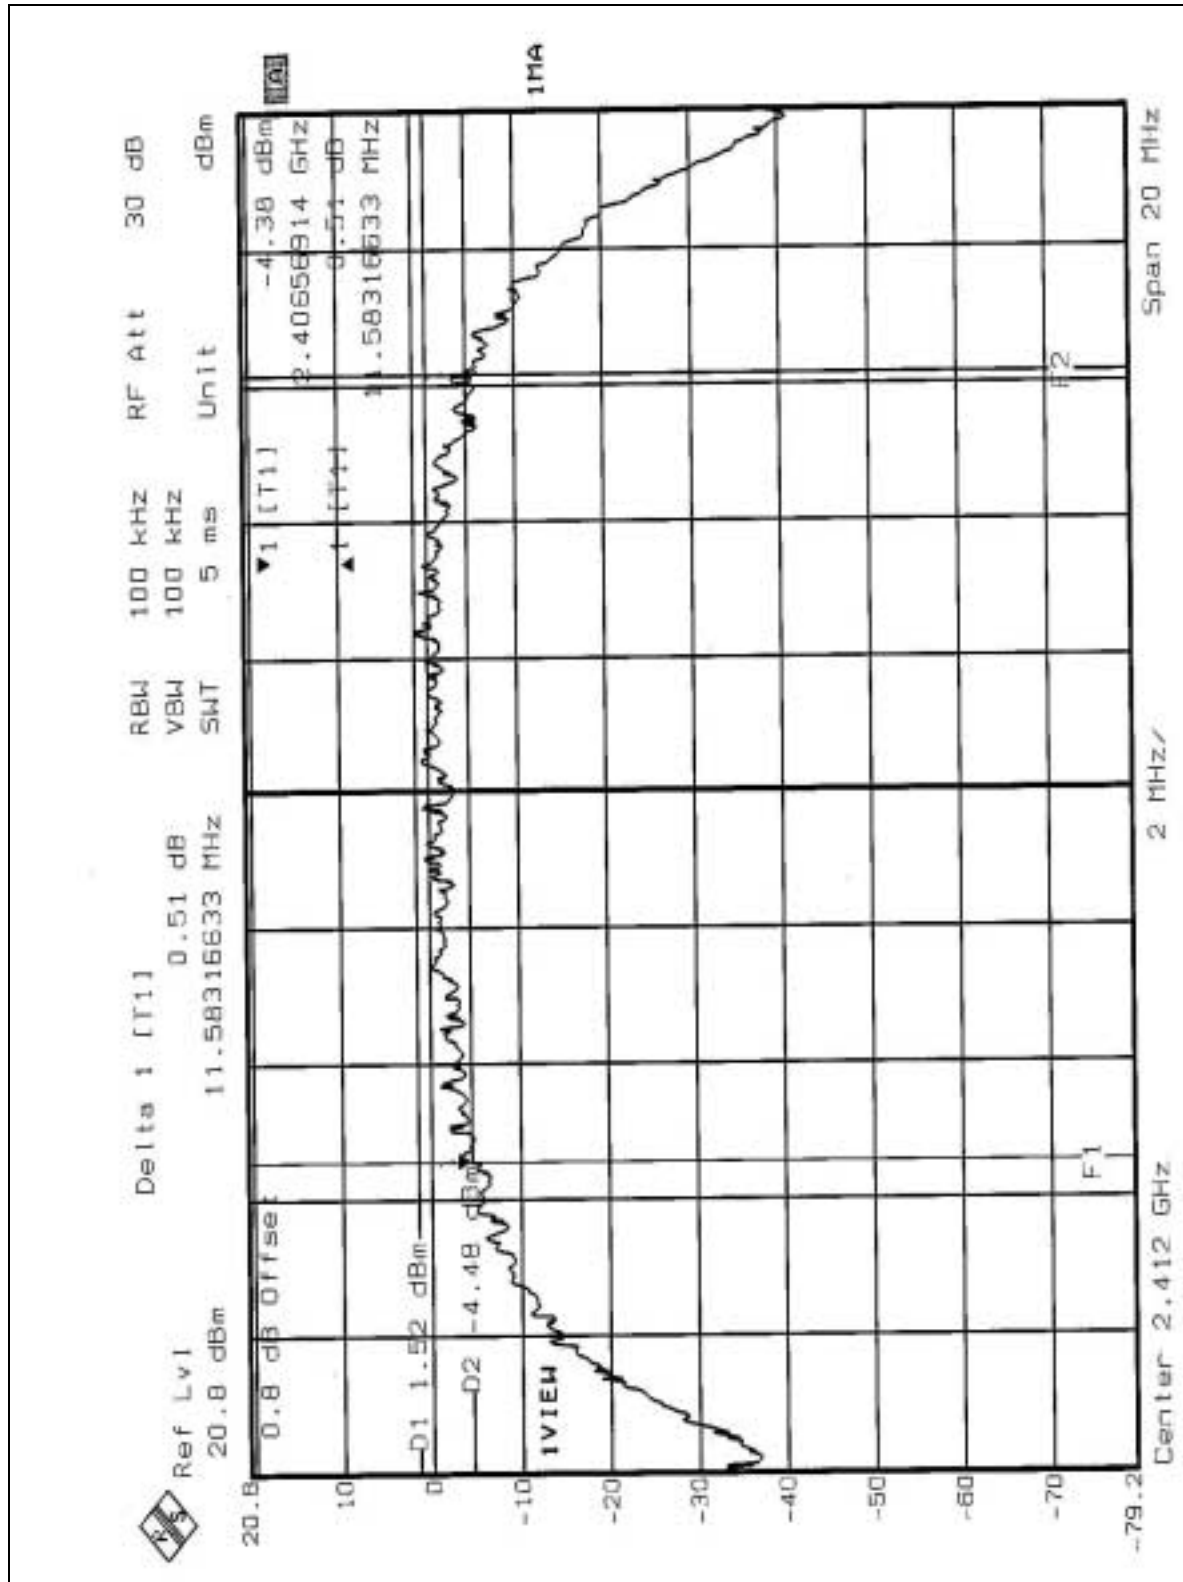




CH6

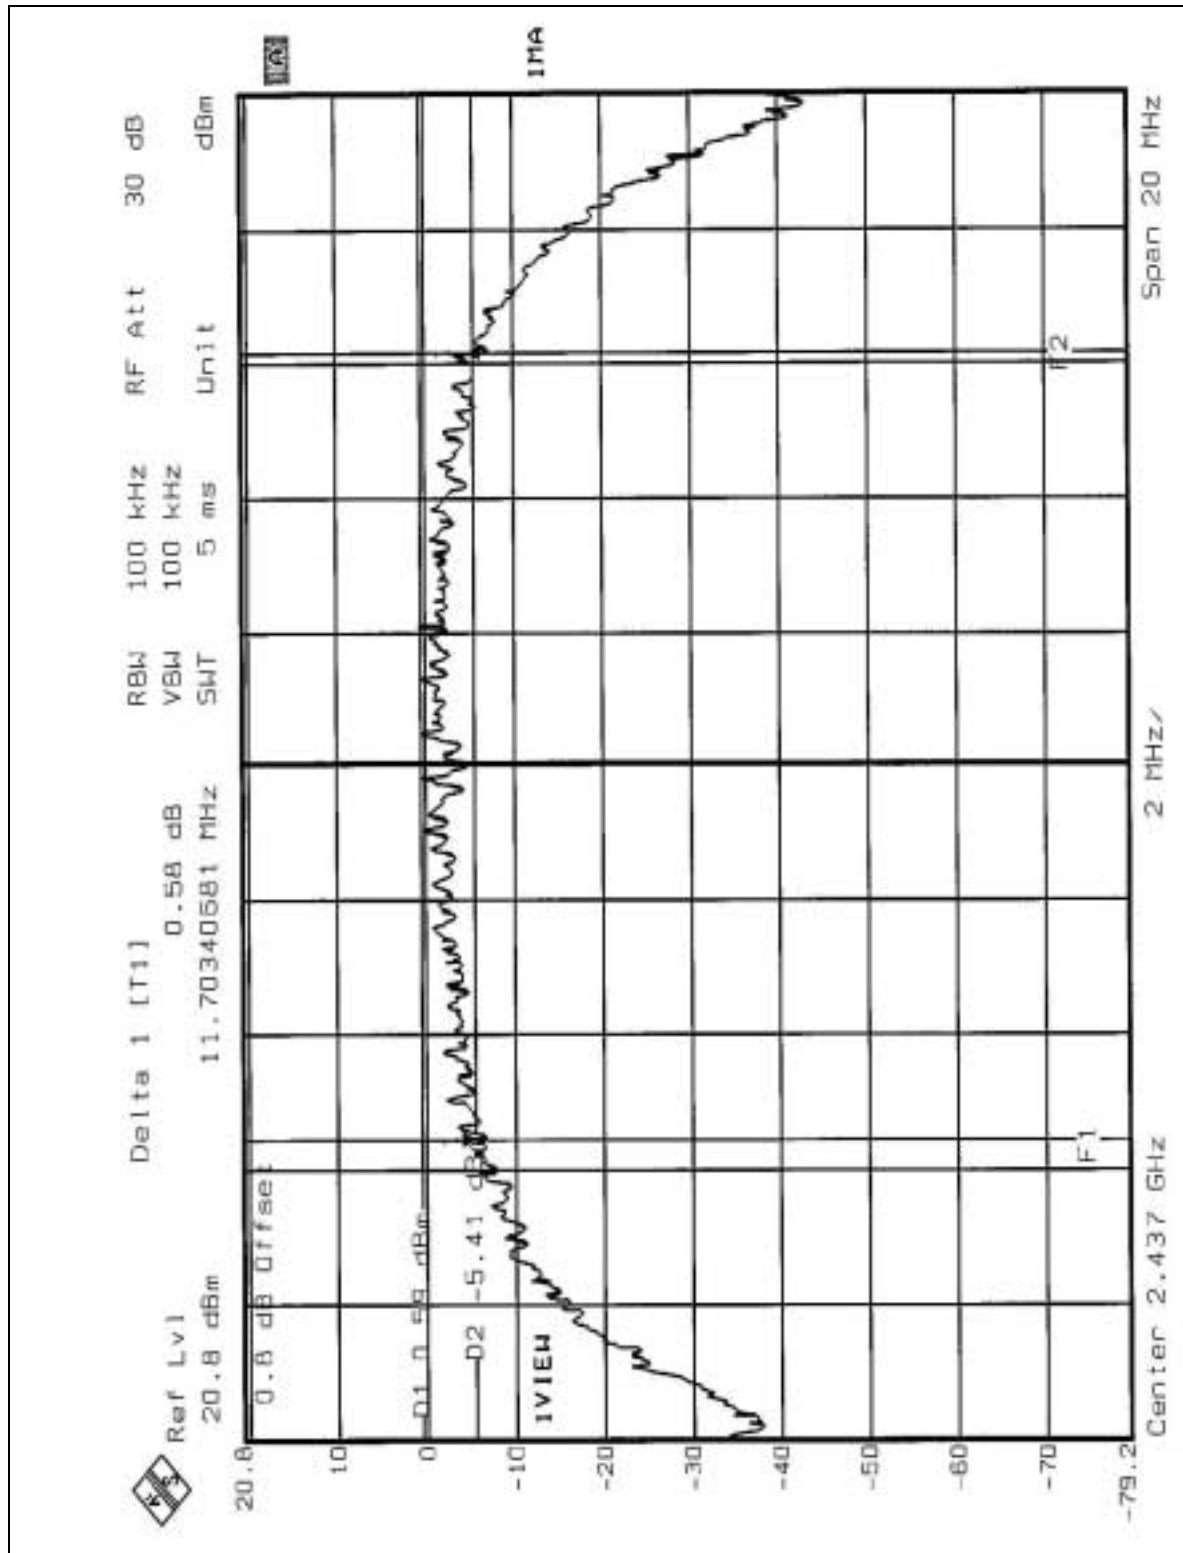



CH11

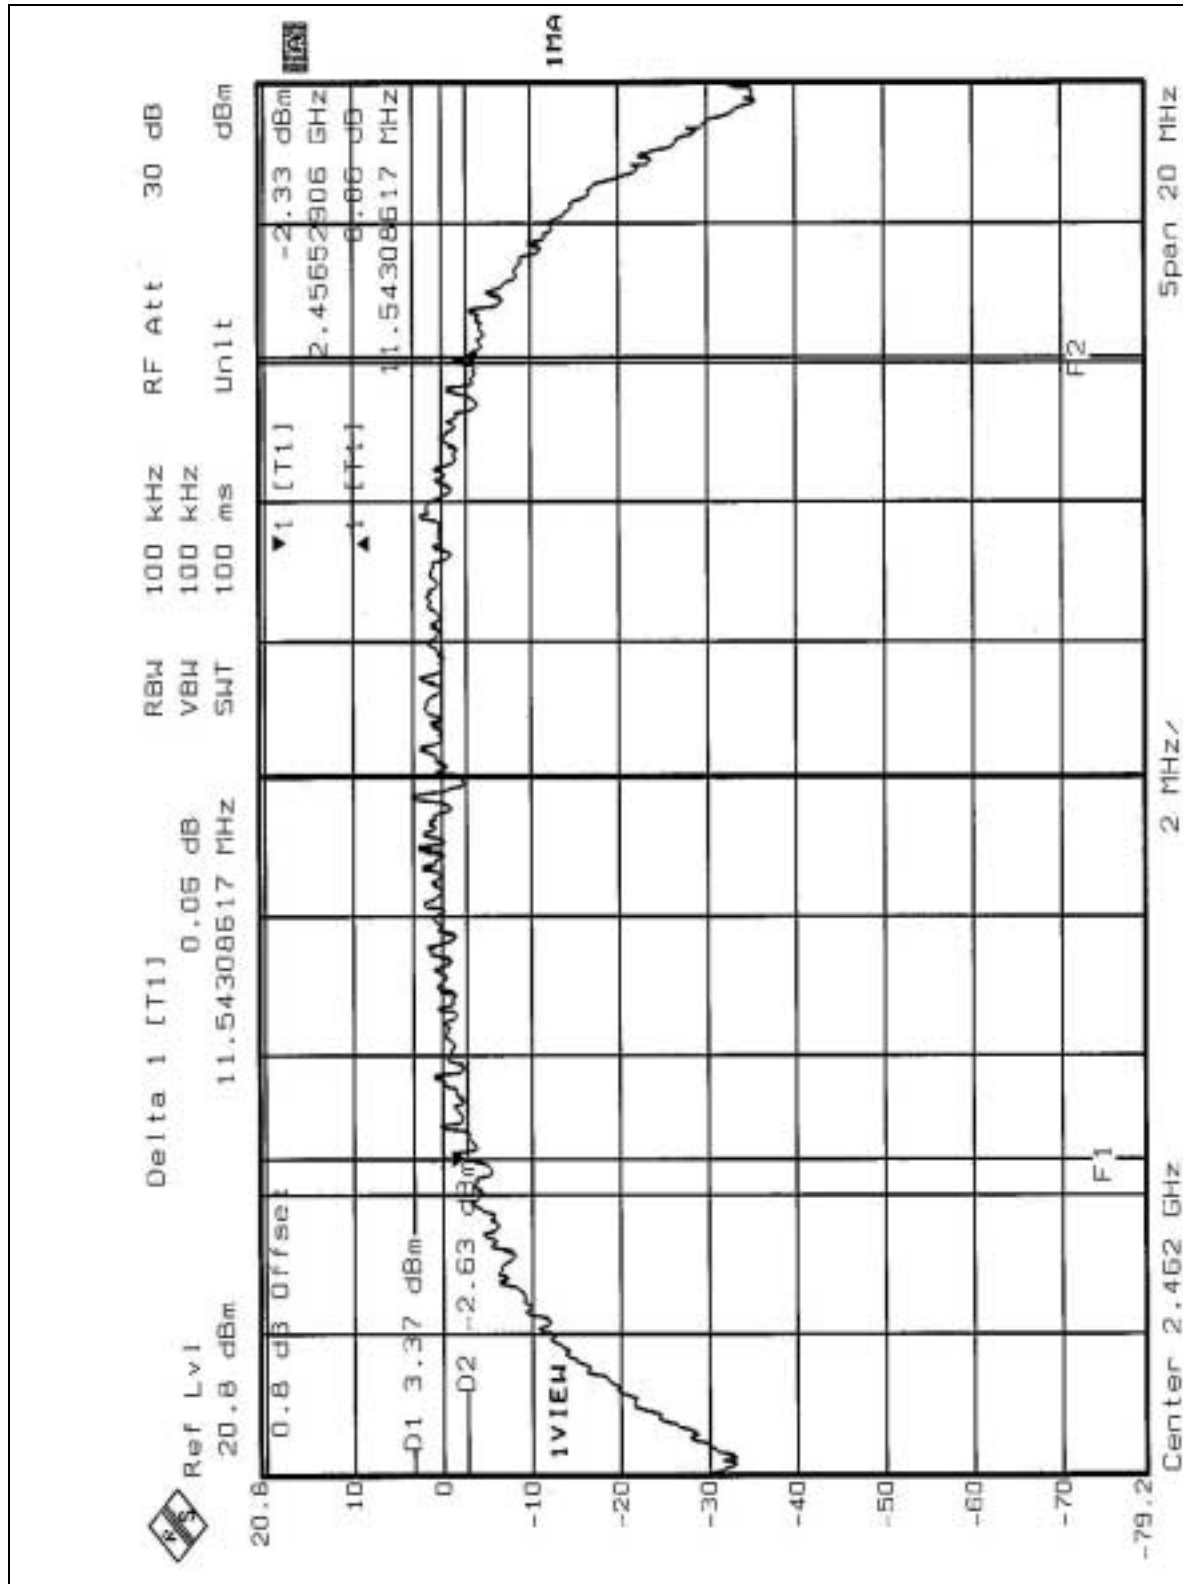



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
POWER METER	E4416A	GB41291118	July. 30, 2003
PEAK POWER SENSOR	E9327A	US40440722	July. 30, 2003

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

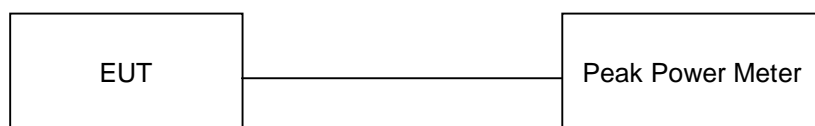

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	22Mbps	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.84	30	PASS
6	2437	16.82	30	PASS
11	2462	17.03	30	PASS



4.4.8 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	2Mbps	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.96	30	PASS
6	2437	16.72	30	PASS
11	2462	16.13	30	PASS



4.4.9 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	11Mbps	TESTED BY	Ansen Lei

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.62	30	PASS
6	2437	16.78	30	PASS
11	2462	16.56	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

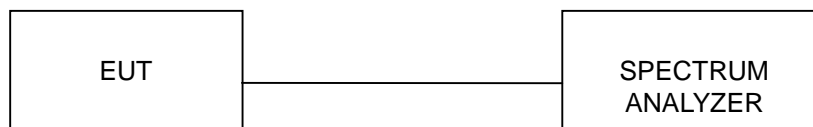

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	22Mbps	TESTED BY	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.23	8	PASS
6	2437	-7.68	8	PASS
11	2462	-7.44	8	PASS




CH1

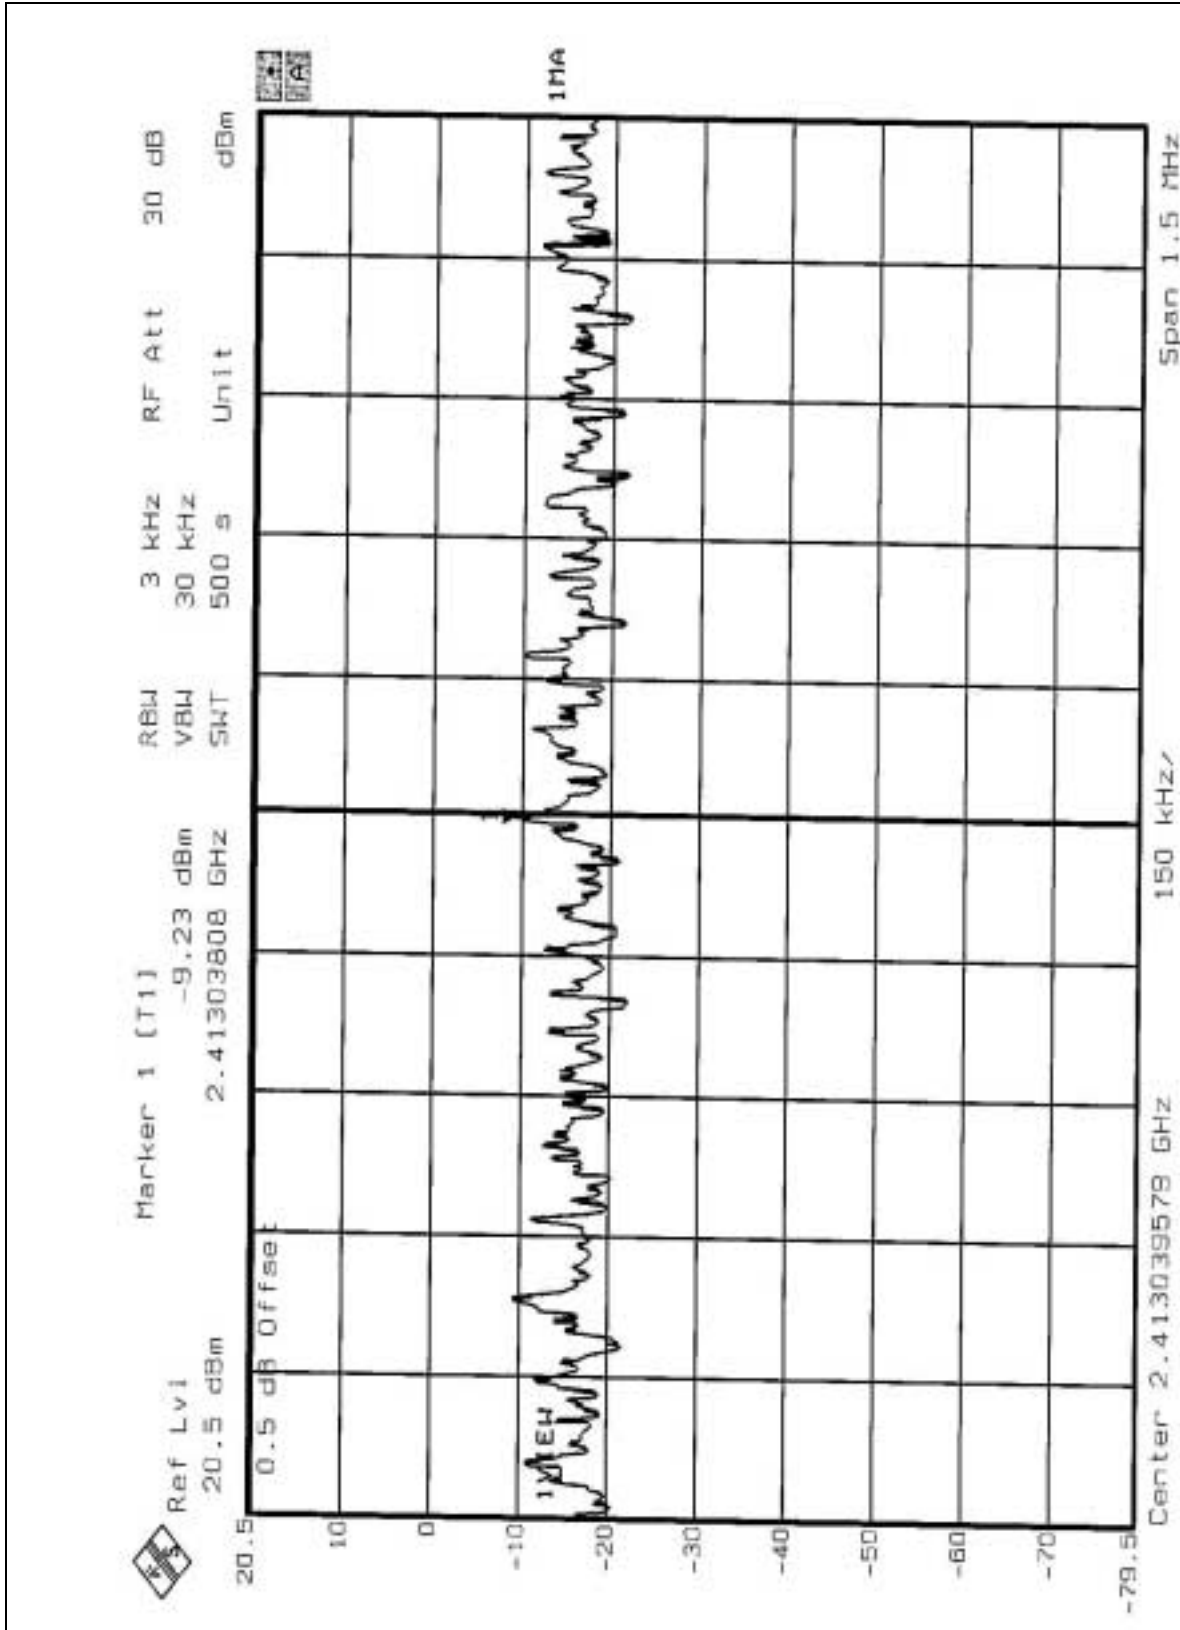




CH6

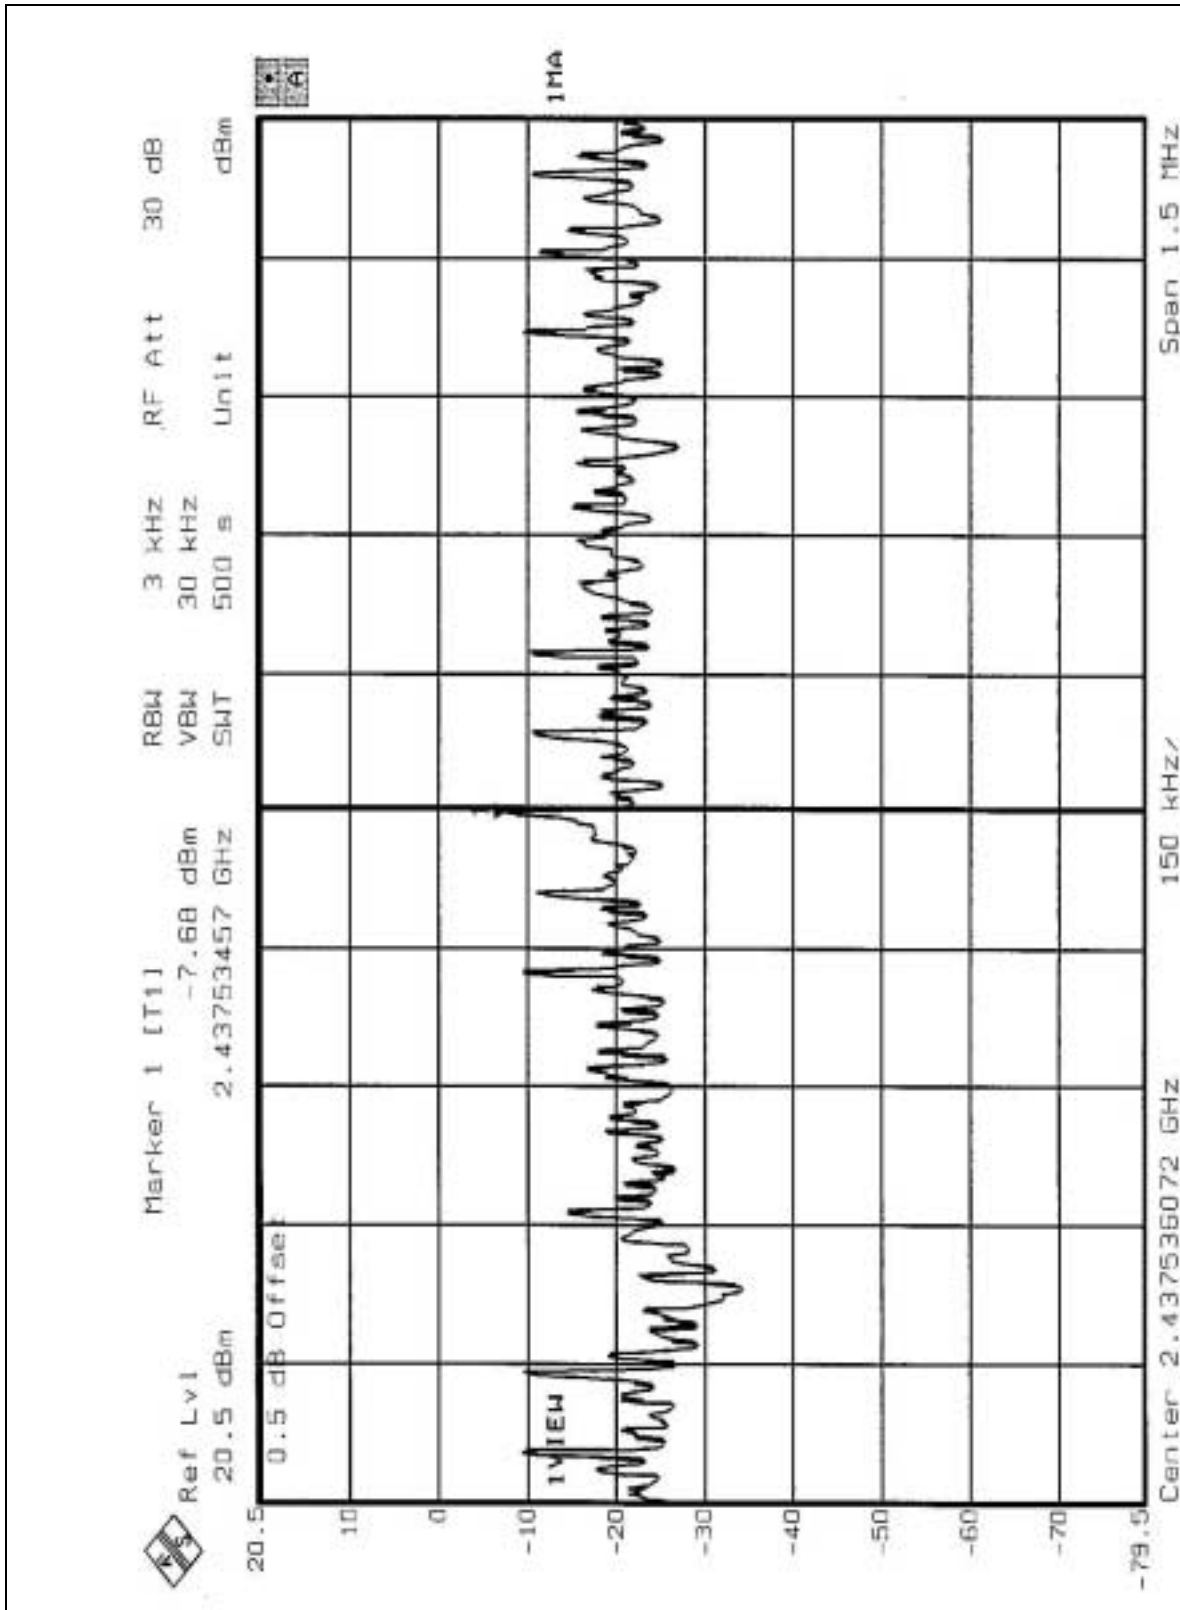



CH11

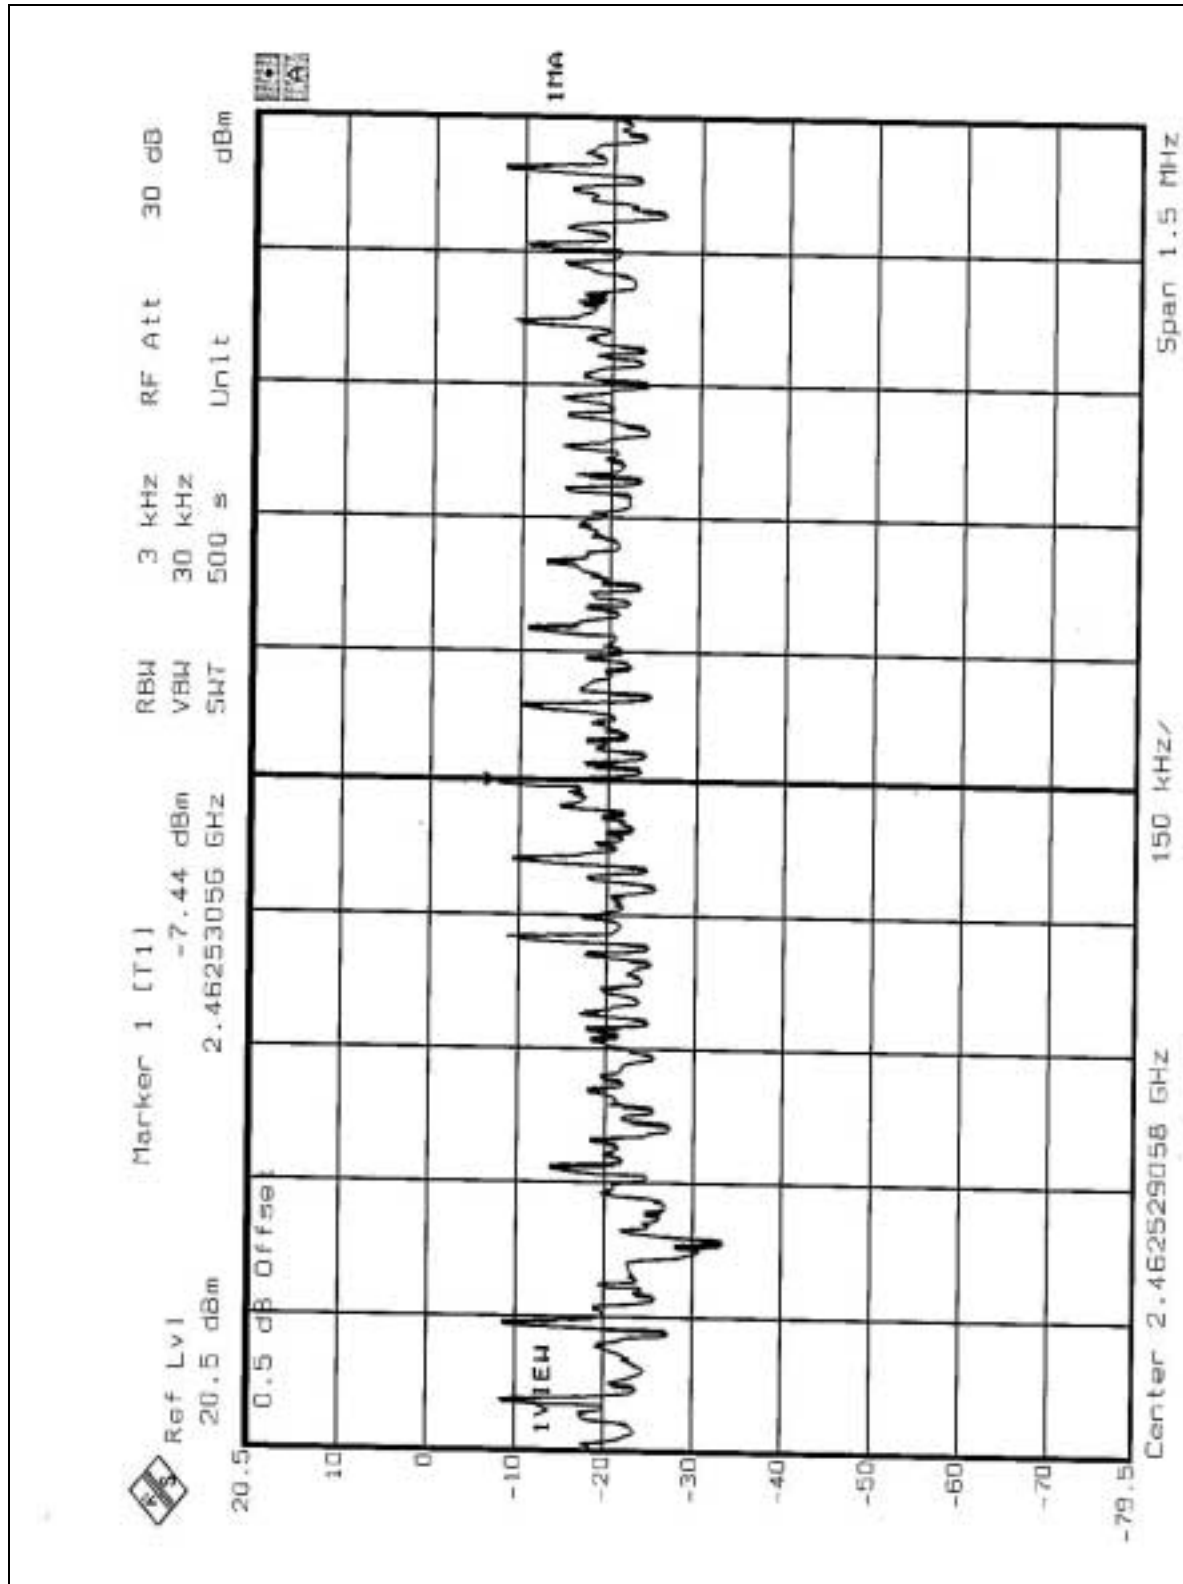




4.5.8 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	2Mbps	TESTED BY	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.49	8	PASS
6	2437	-13.60	8	PASS
11	2462	-13.64	8	PASS




CH1

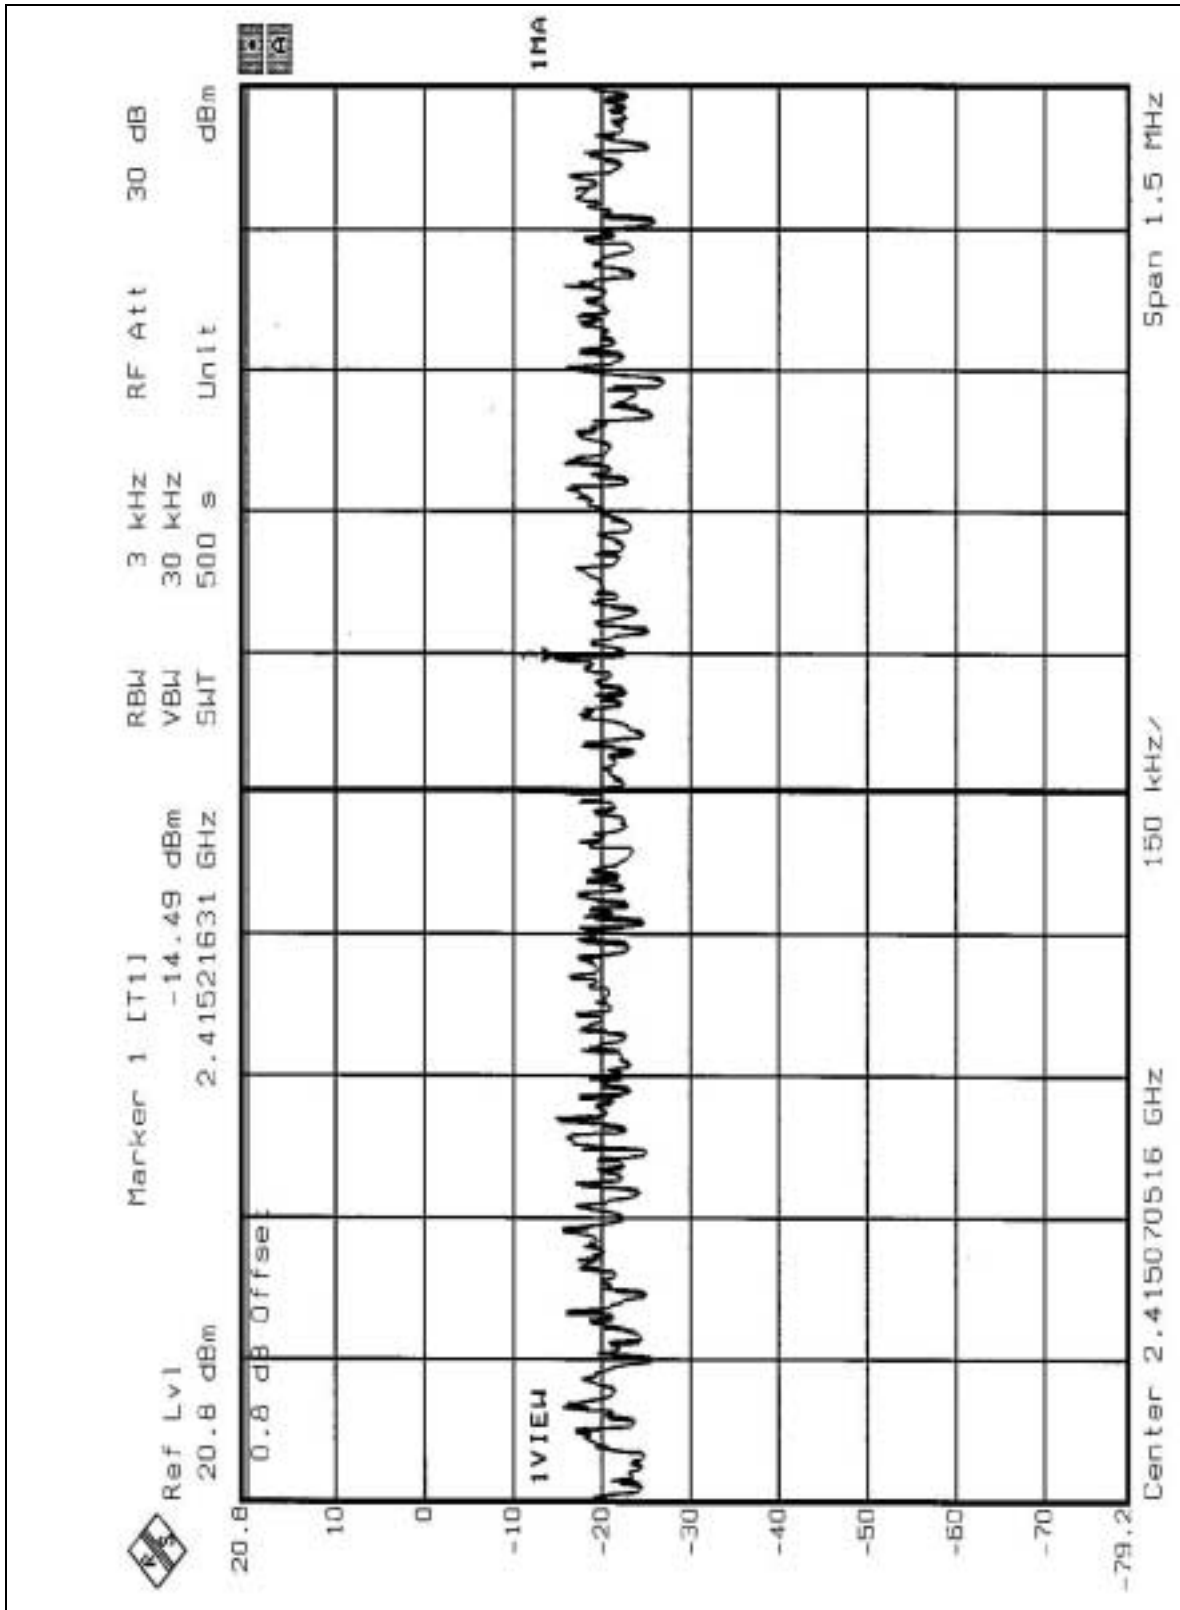




CH6

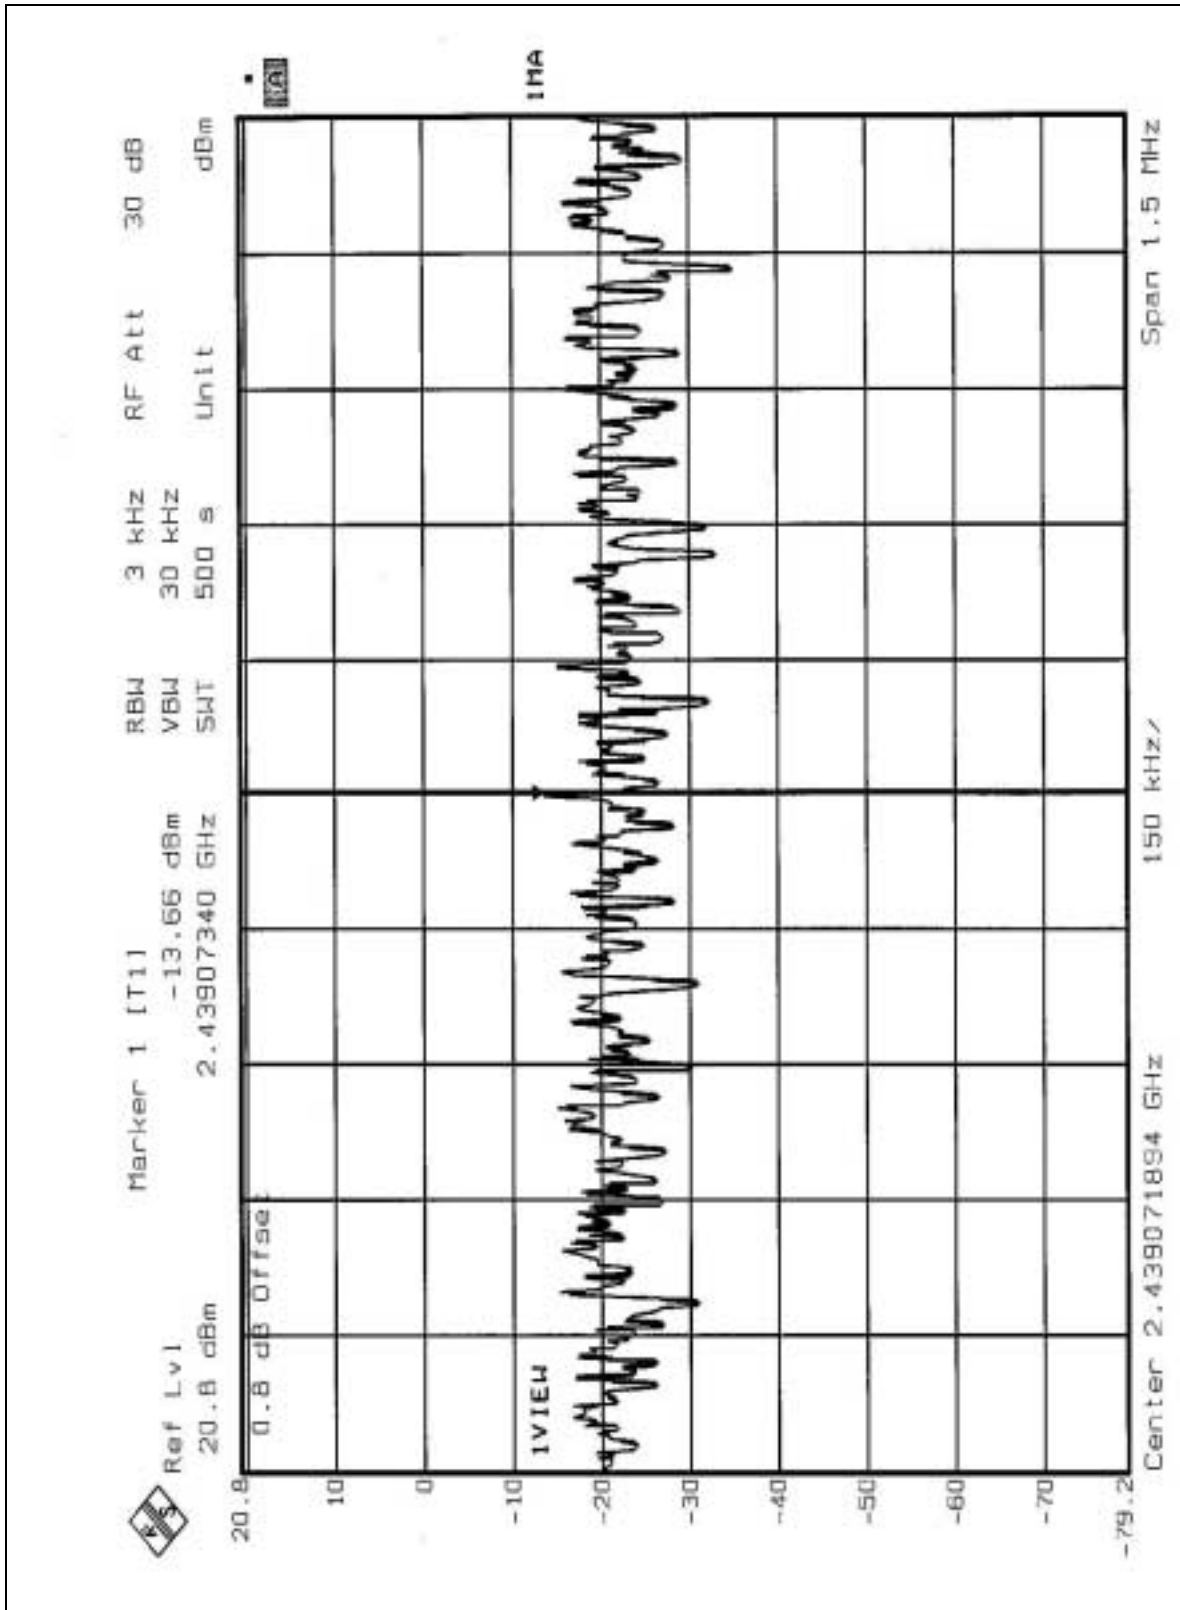



CH11

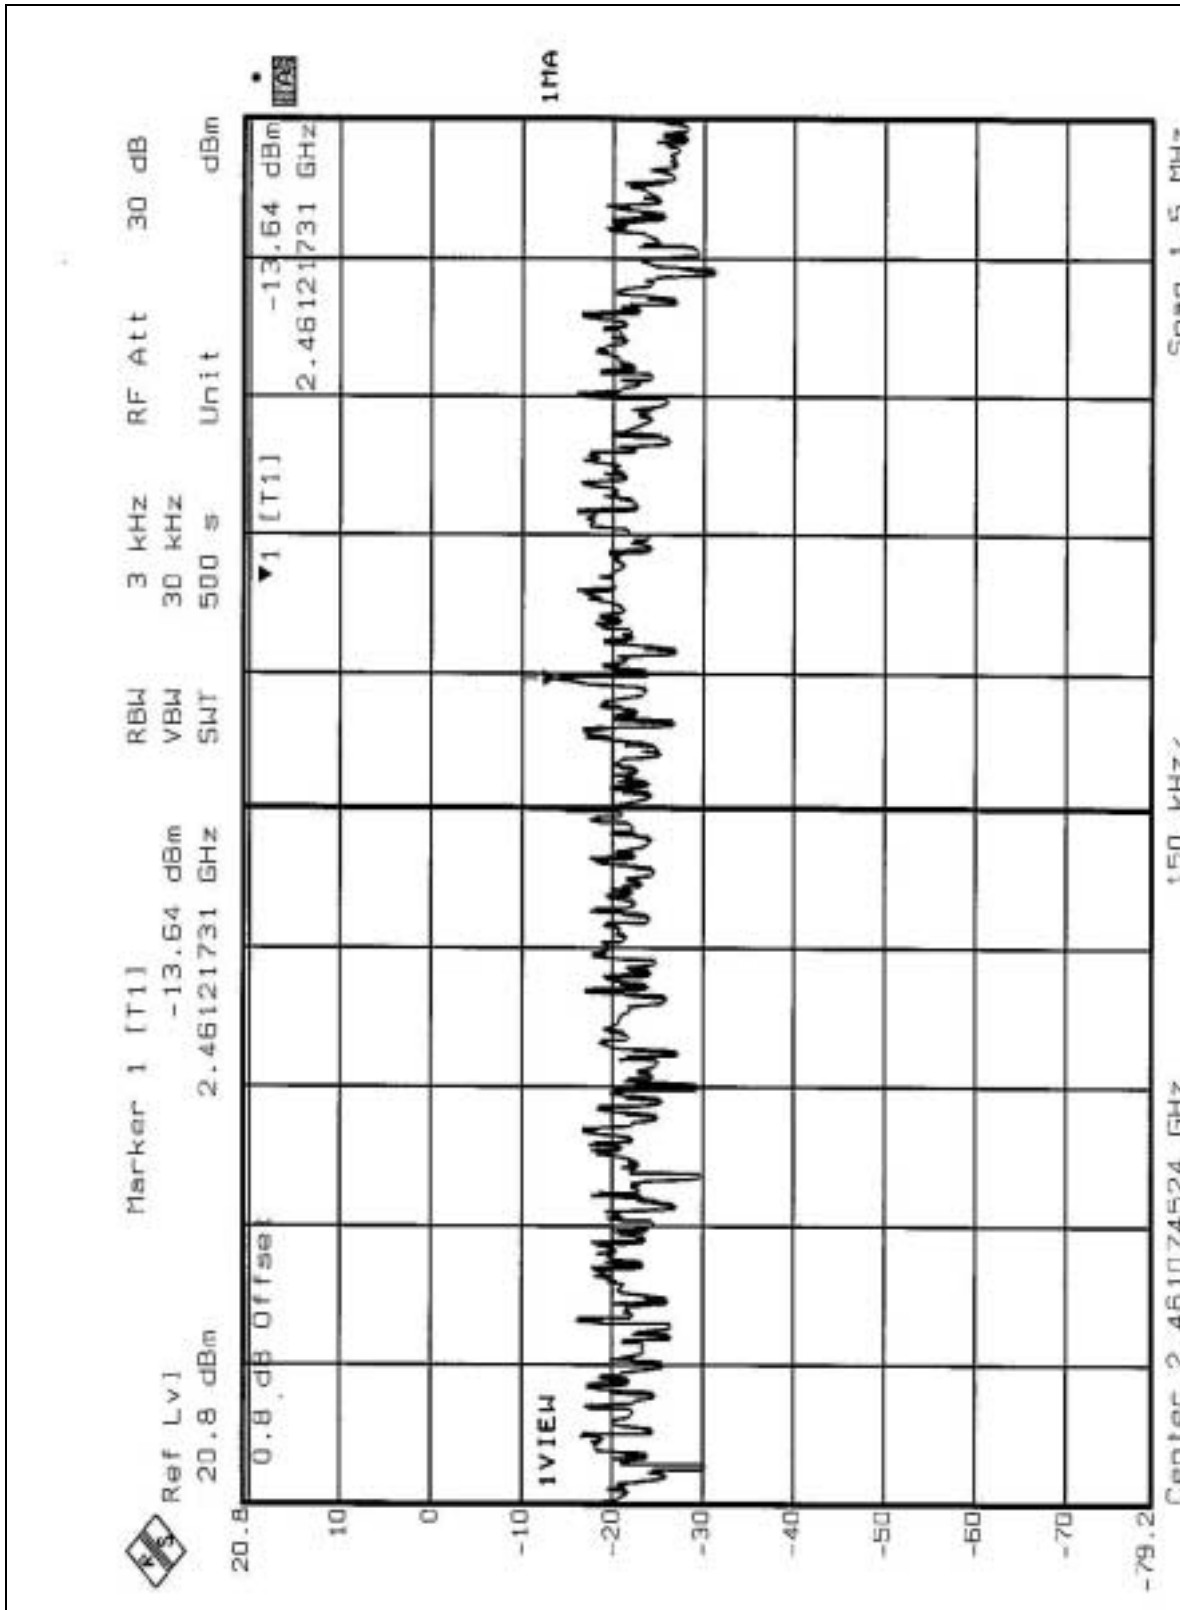




4.5.9 TEST RESULTS

EUT	Enhance 2.4GHz Ethernet Wireless Bridge, Enhance 2.4GHz Range Extender	MODEL	DWL-800AP+, DWL-810+
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	22deg. C, 67%RH, 1005 hPa
TRANSFER RATE	11Mbps	TESTED BY	Ansen Lei

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.46	8	PASS
6	2437	-13.47	8	PASS
11	2462	-12.08	8	PASS




CH1

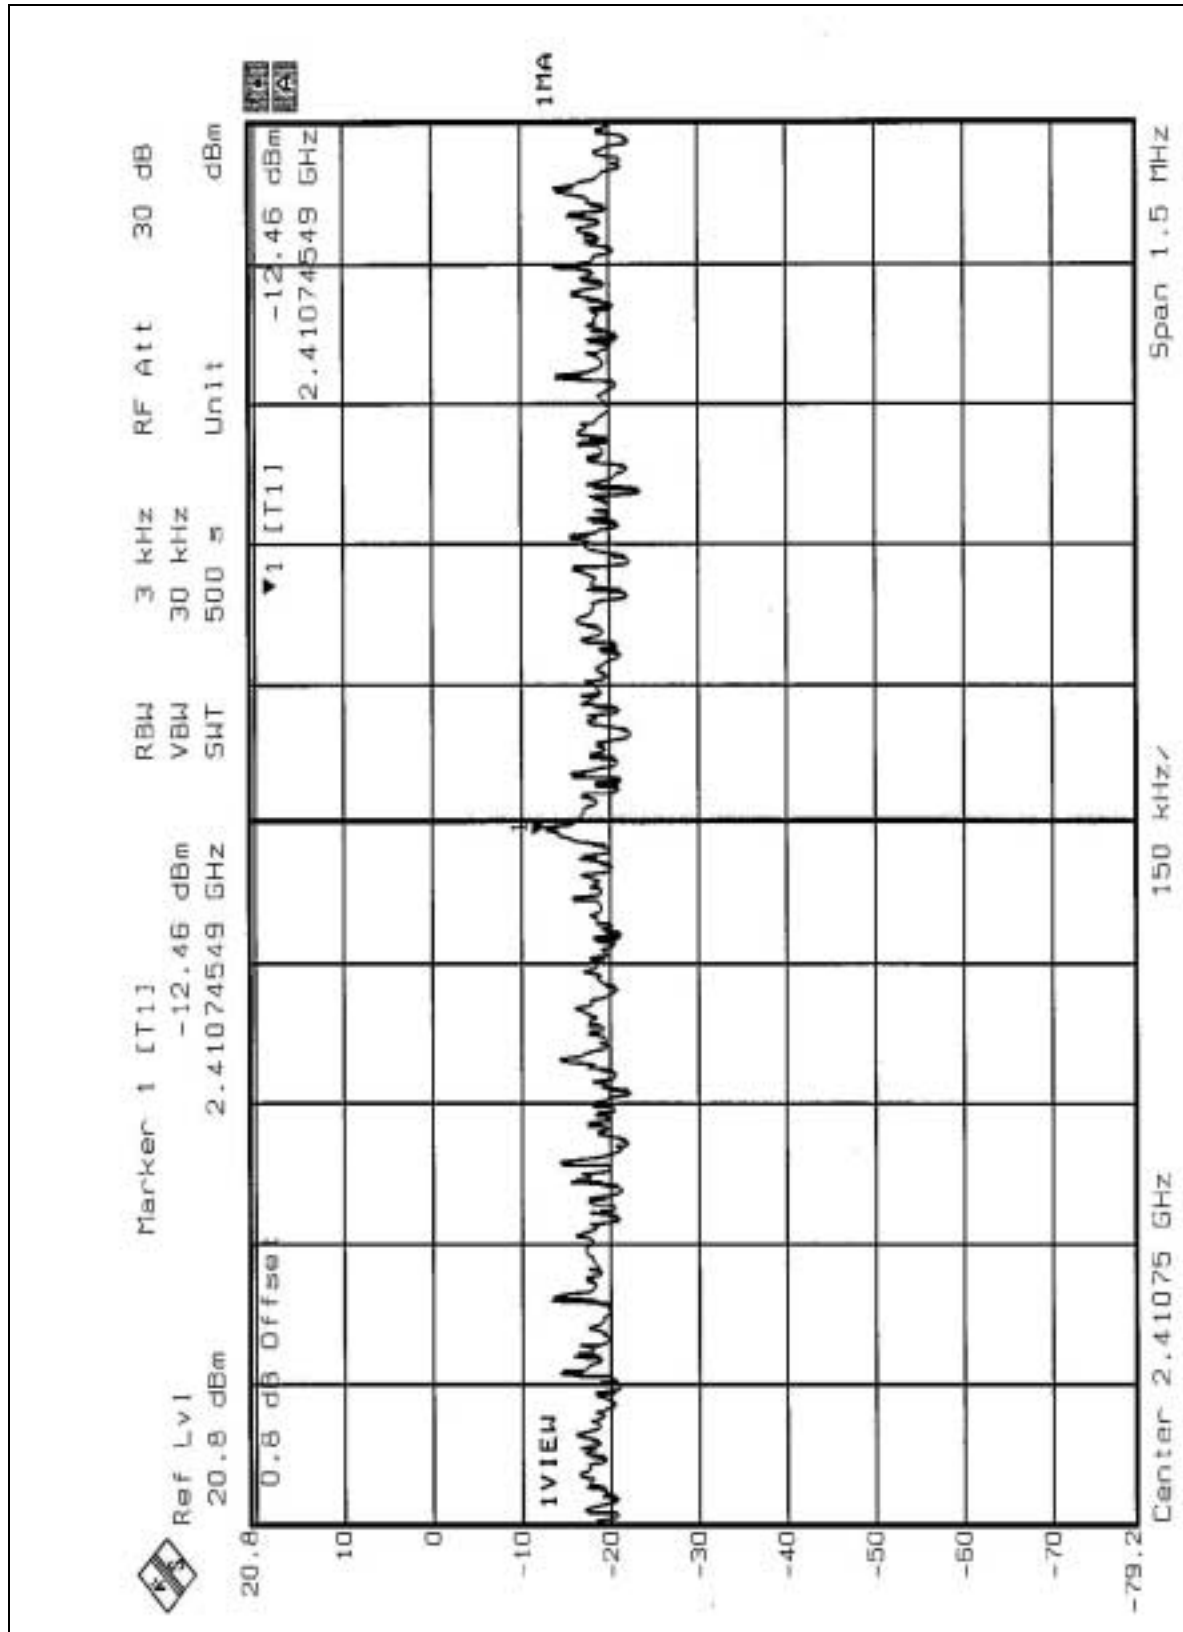




CH6

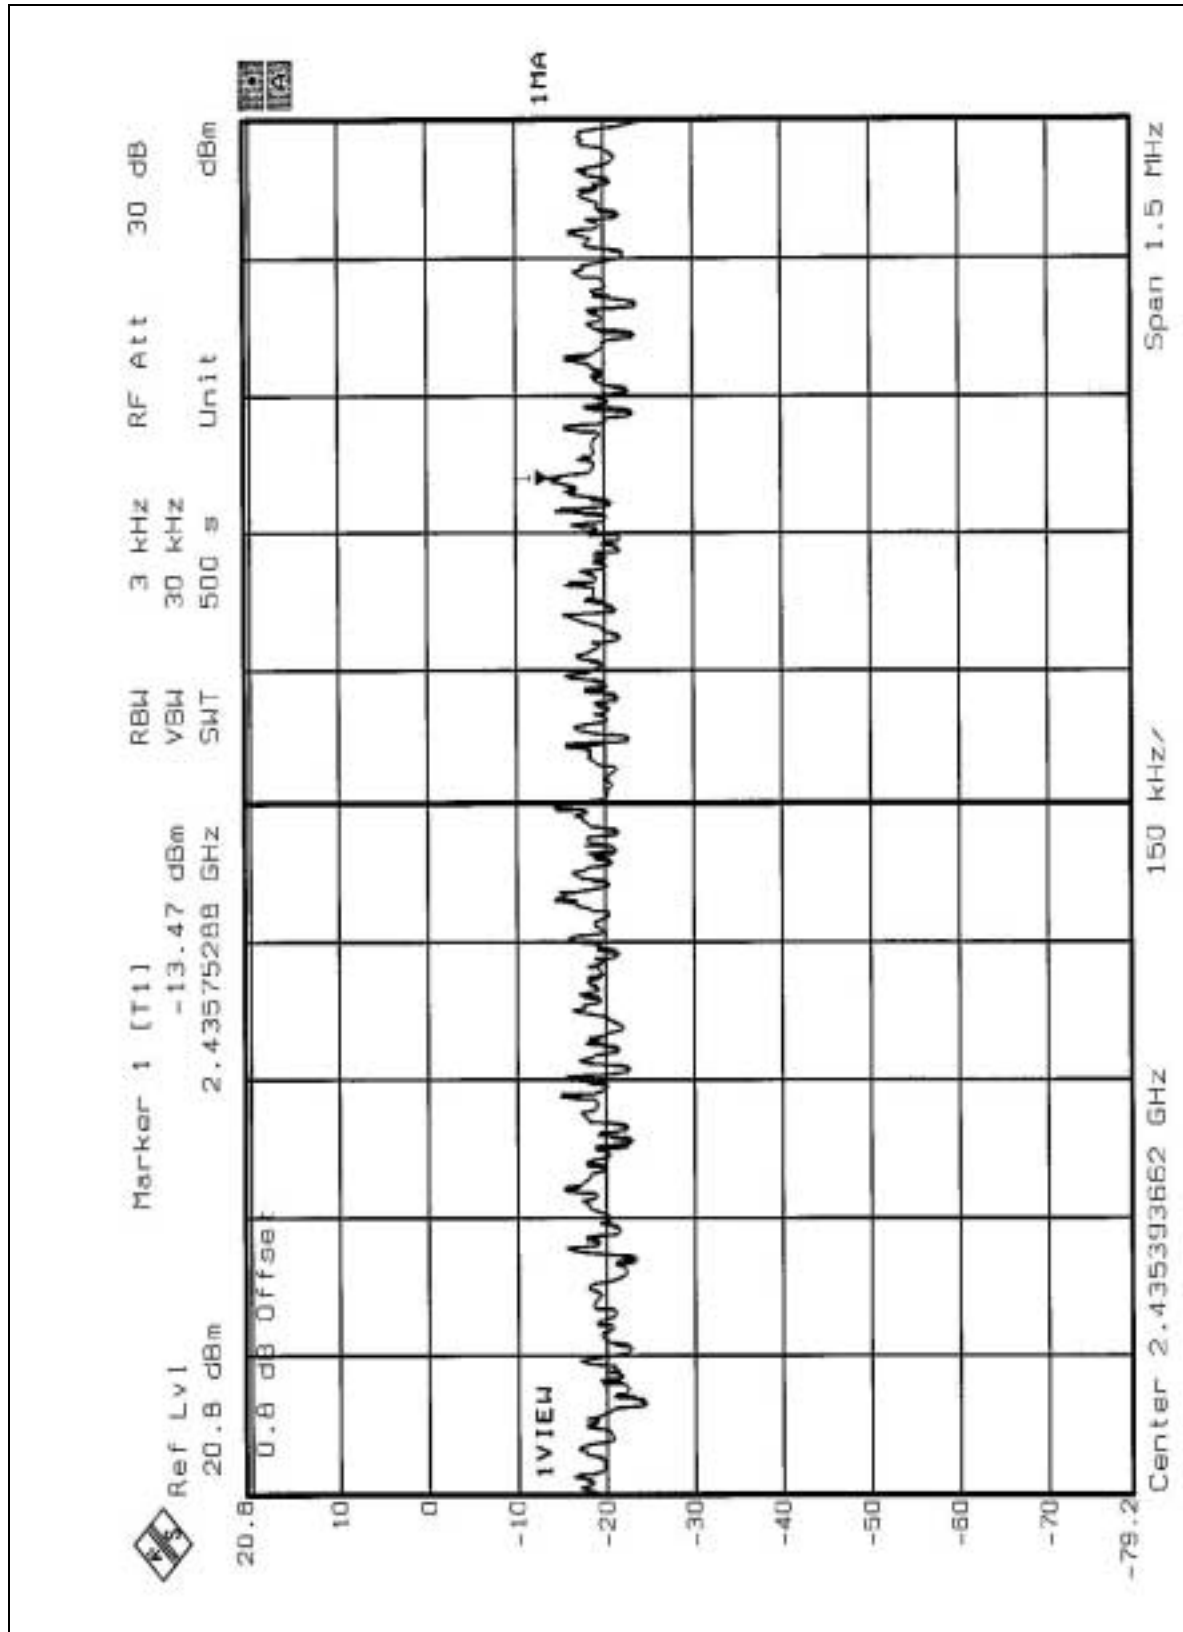



CH11

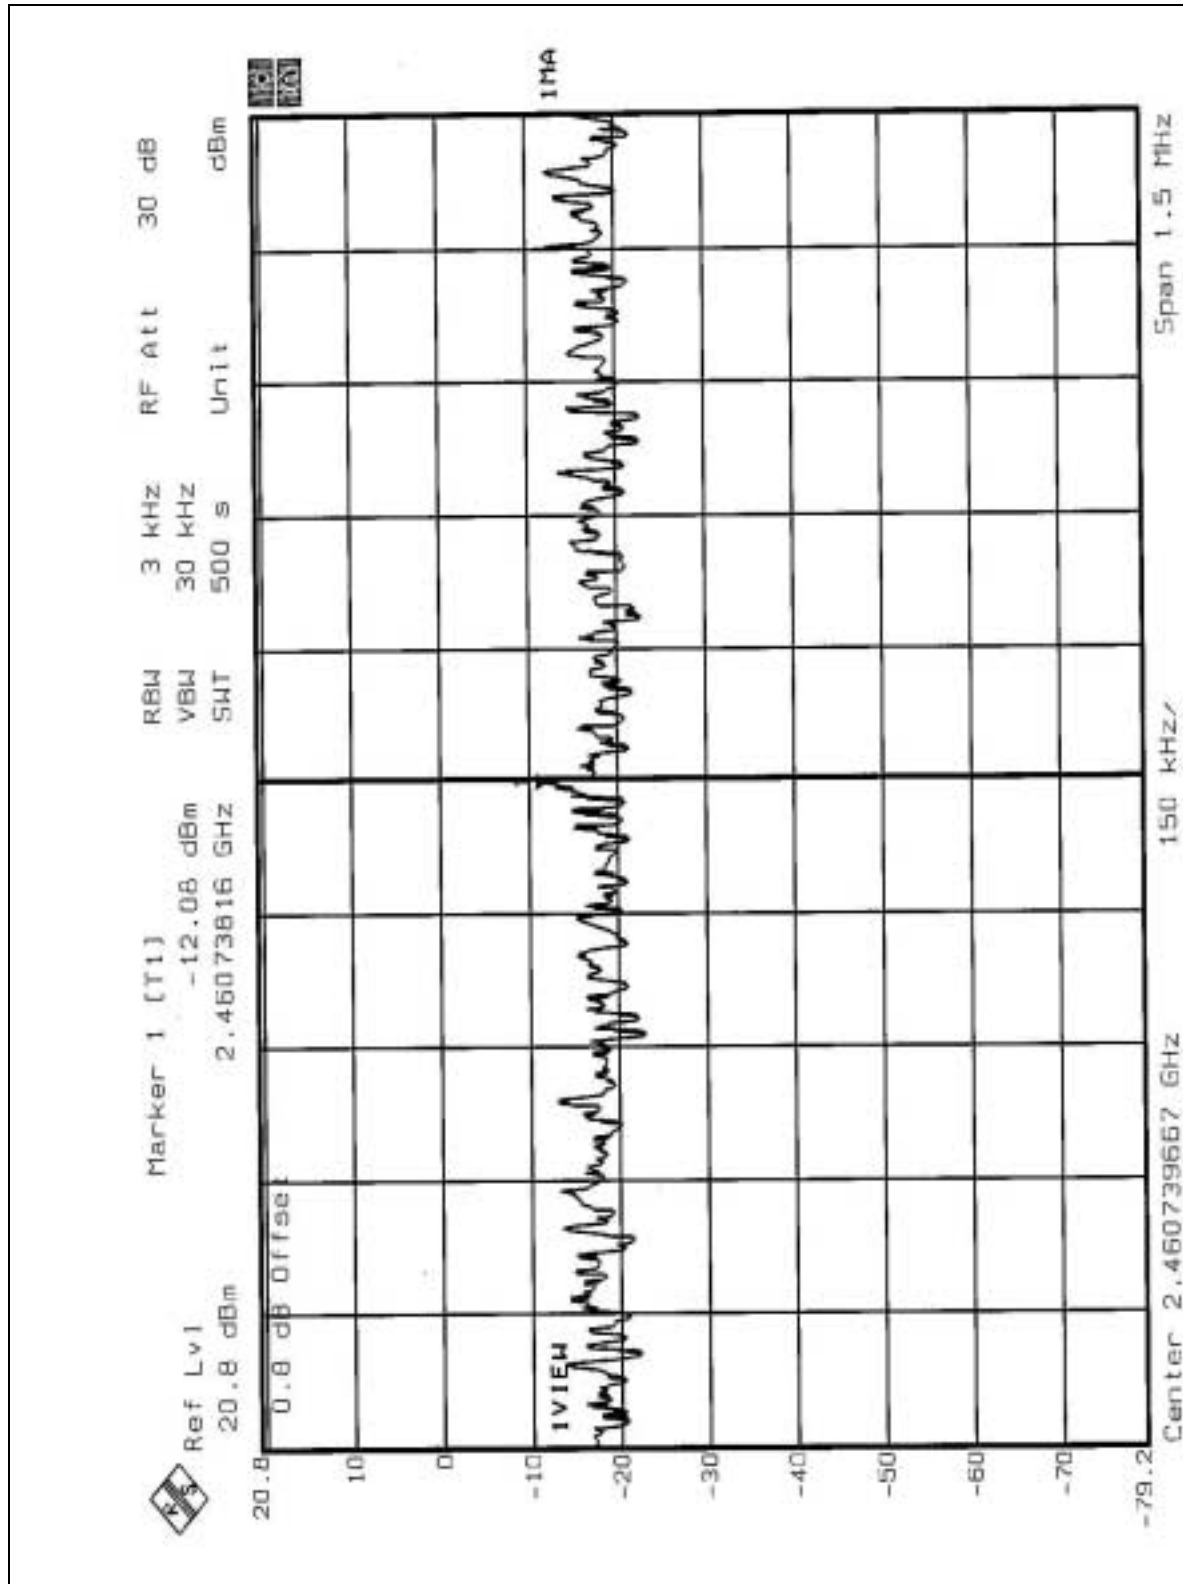



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6


4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE1: The band edge emission plot on the following first page shows 48.20dB delta between carrier maximum power and local maximum emission in restrict band (2.3863GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 96.3dBuV/m, so the maximum field strength in restrict band is $96.3-48.20=48.10$ dBuV/m which is under 54dBuV/m limit.

NOTE2: The band edge emission plot on the following second page shows 53.02dB delta between carrier maximum power and local maximum emission in restrict band (2.4897GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 96.6dBuV/m, so the maximum field strength in restrict band is $96.6-53.02=43.58$ dBuV/m which is under 54dBuV/m limit.

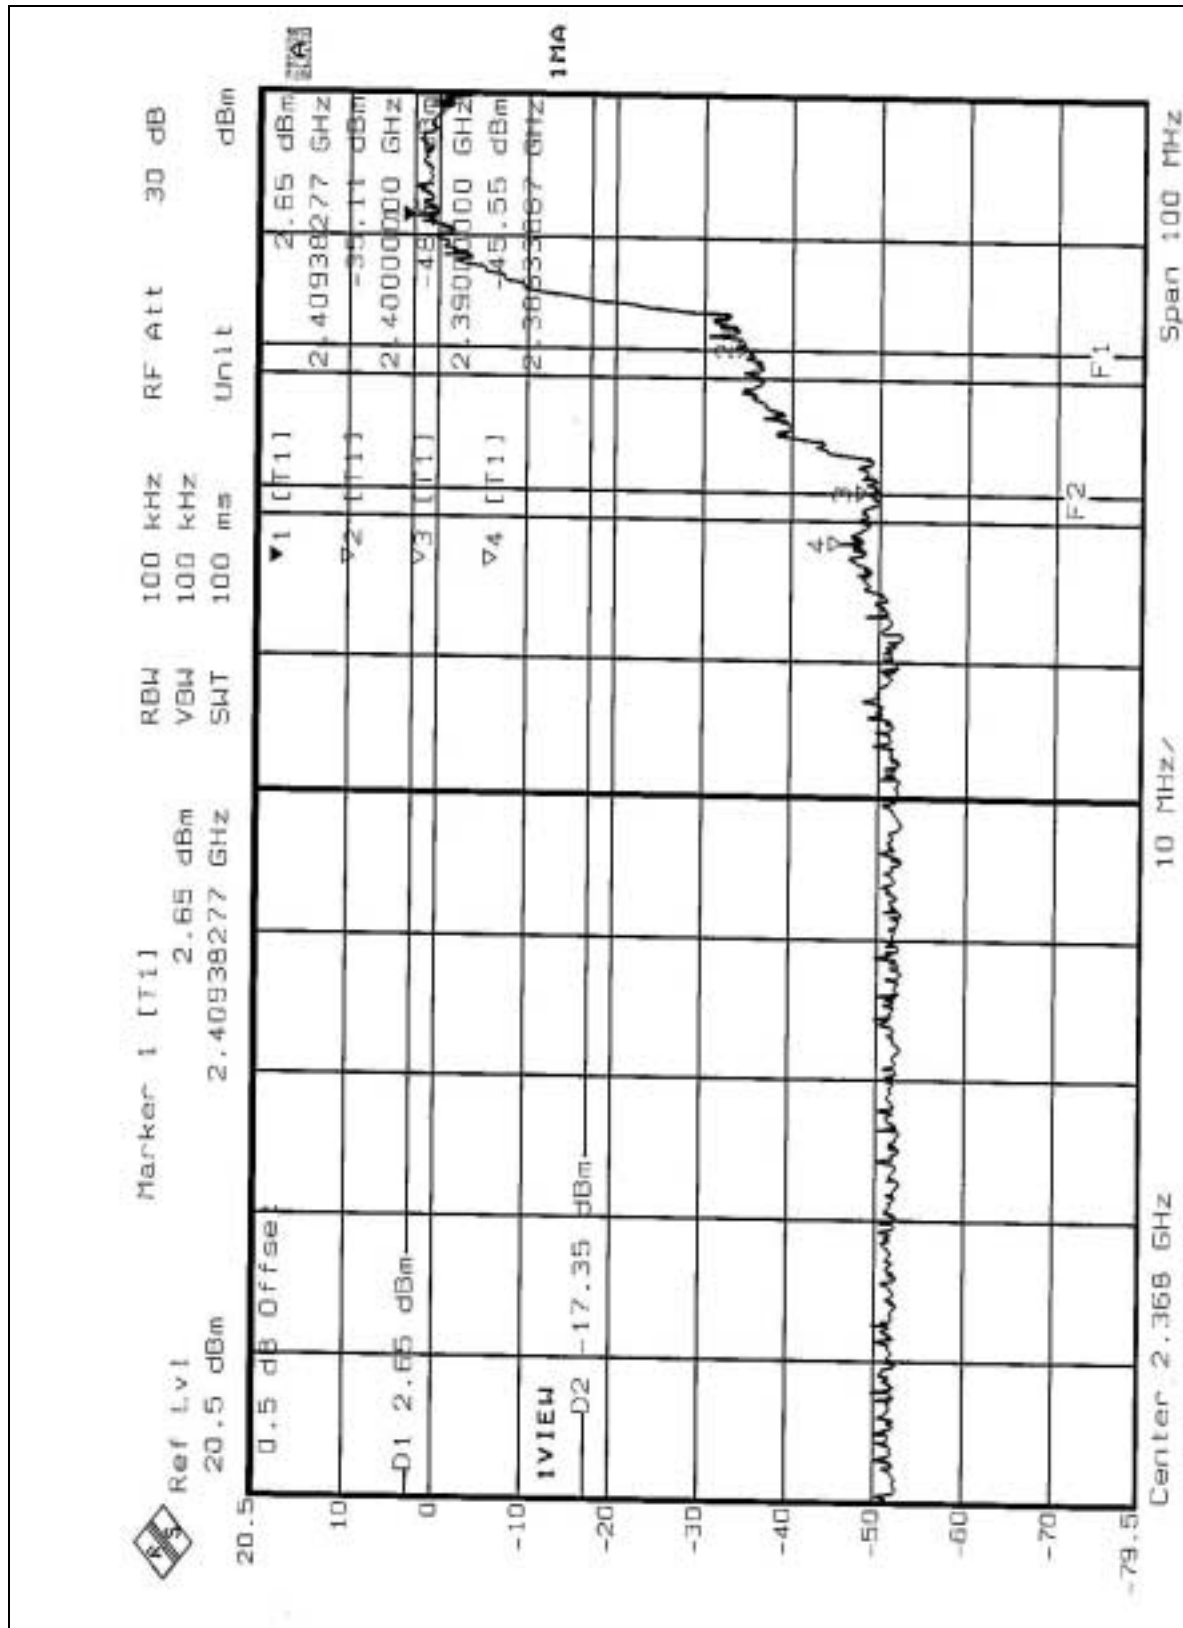

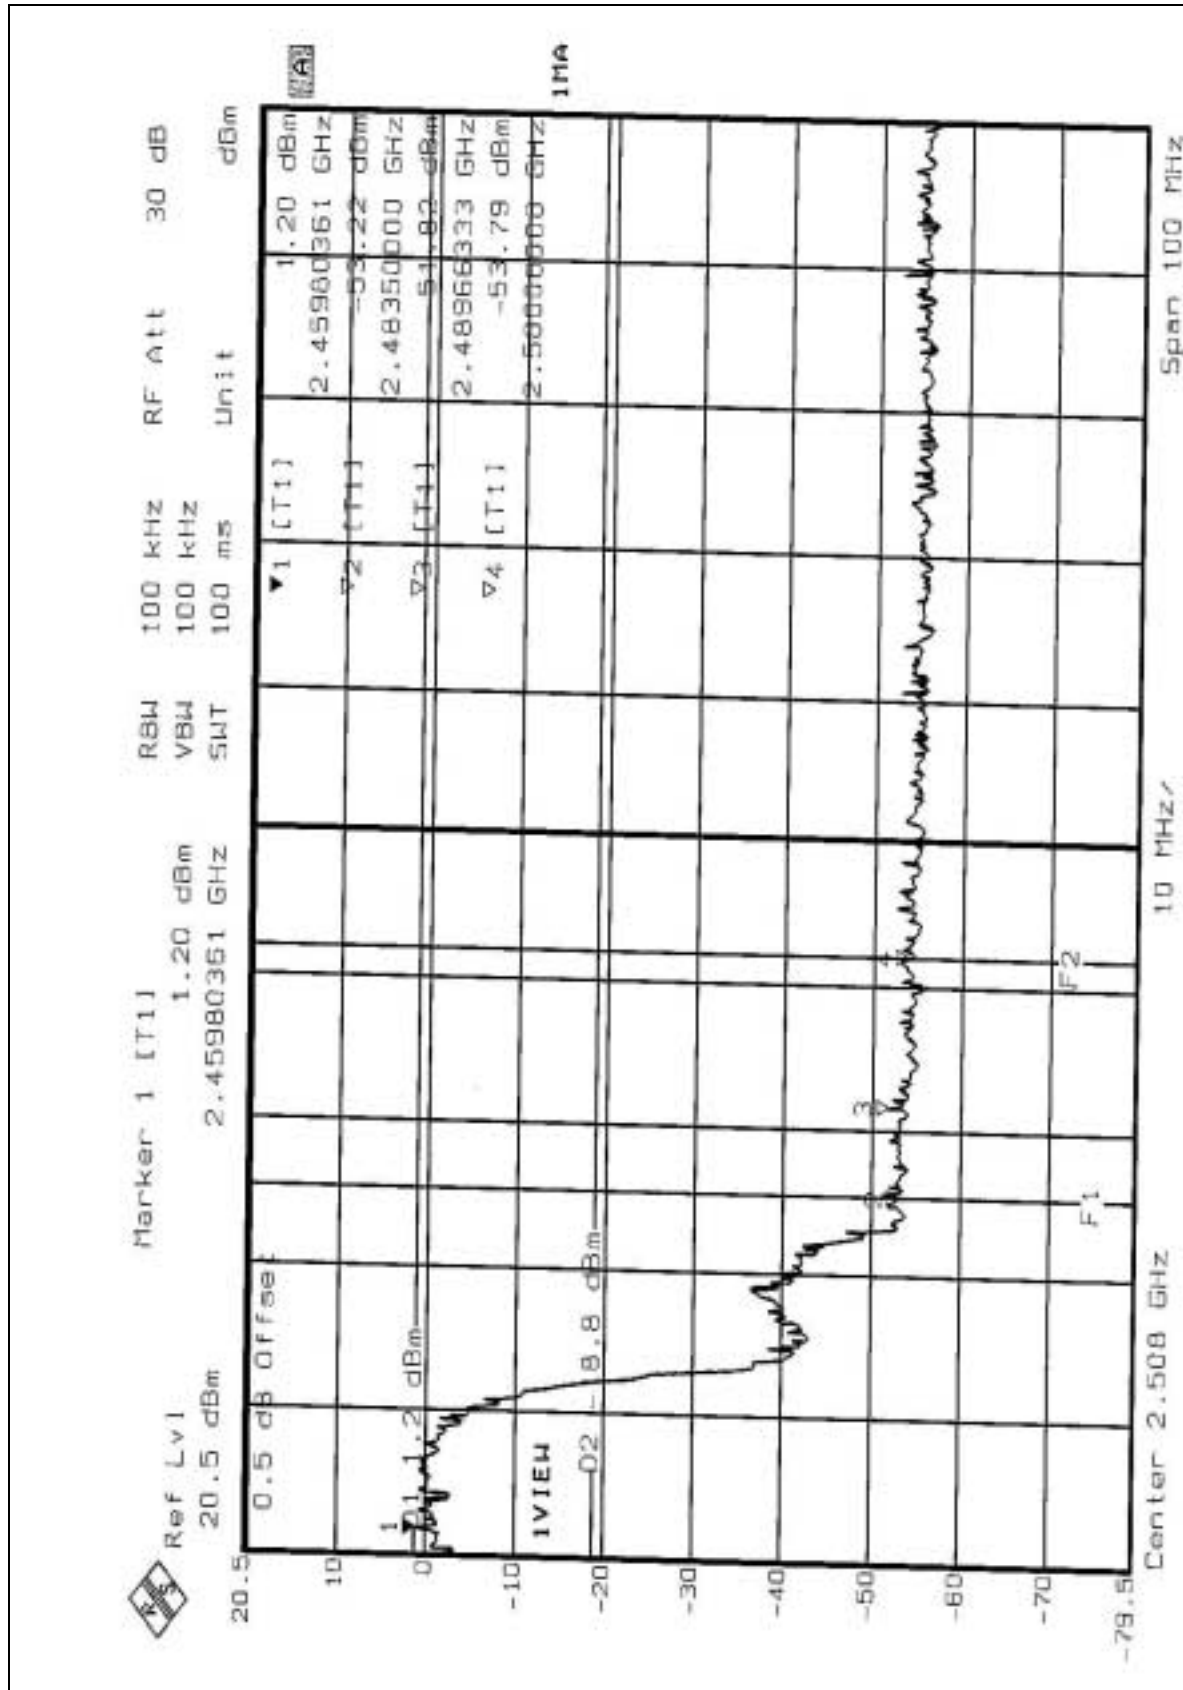



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna with Reverse SMA connector. The maximum Gain of the antenna is 2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.