



# FCC TEST REPORT

**REPORT NO.:** RF920214R01  
**MODEL NO.:** DWL-AG650  
**RECEIVED:** Feb. 14, 2003  
**TESTED:** Feb. 19 ~ Mar. 11, 2003

**APPLICANT:** D-Link Corporation

**ADDRESS:** NO.8, LI-HSIN VII ROAD, SCIENCE BASED  
INDUSTRIAL PARK HSIN-CHU, TAIWAN,  
R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14<sup>th</sup> Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 126 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0



## Table of Contents

1.	CERTIFICATION.....	5
2.	SUMMARY OF TEST RESULTS .....	6
3.	GENERAL INFORMATION .....	8
3.1	GENERAL DESCRIPTION OF EUT .....	8
3.2	DESCRIPTION OF TEST MODES .....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	10
3.4	DESCRIPTION OF SUPPORT UNITS.....	11
4.	TEST TYPES AND RESULTS (FOR PART 802.11B & DRAFT 802.11G) .....	12
4.1	CONDUCTED EMISSION MEASUREMENT .....	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES .....	13
4.1.4	DEVIATION FROM TEST STANDARD .....	13
4.1.5	TEST SETUP .....	14
4.1.6	EUT OPERATING CONDITIONS.....	14
4.1.7	TEST RESULTS .....	15
4.2	RADIATED EMISSION MEASUREMENT .....	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	21
4.2.2	TEST INSTRUMENTS.....	22
4.2.3	TEST PROCEDURES .....	23
4.2.4	DEVIATION FROM TEST STANDARD .....	23
4.2.5	TEST SETUP .....	24
4.2.6	EUT OPERATING CONDITIONS.....	24
4.2.7	TEST RESULTS .....	25
4.2.8	TEST RESULTS – FOR CCK .....	26
4.2.9	TEST RESULTS – FOR OFDM.....	29
4.3	6dB BANDWIDTH MEASUREMENT .....	32
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	32
4.3.2	TEST INSTRUMENTS.....	32
4.3.3	TEST PROCEDURE.....	33
4.3.4	DEVIATION FROM TEST STANDARD .....	33
4.3.5	TEST SETUP .....	33
4.3.6	EUT OPERATING CONDITIONS.....	33
4.3.7	TEST RESULTS – FOR CCK .....	34
4.3.8	TEST RESULTS – FOR OFDM.....	38
4.4	MAXIMUM PEAK OUTPUT POWER.....	42
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	42
4.4.2	INSTRUMENTS.....	42
4.4.3	TEST PROCEDURES .....	43
4.4.4	DEVIATION FROM TEST STANDARD .....	43
4.4.5	TEST SETUP .....	43
4.4.6	EUT OPERATING CONDITIONS.....	43
4.4.7	TEST RESULTS – FOR CCK .....	44
4.4.8	TEST RESULTS – FOR OFDM.....	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	46
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	46
4.5.2	TEST INSTRUMENTS.....	46
4.5.3	TEST PROCEDURE.....	47



4.5.4	DEVIATION FROM TEST STANDARD .....	47
4.5.5	TEST SETUP .....	47
4.5.6	EUT OPERATING CONDITION .....	47
4.5.7	TEST RESULTS – FOR CCK .....	48
4.5.8	TEST RESULTS – FOR OFDM.....	52
4.6	BAND EDGES MEASUREMENT .....	56
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	56
4.6.2	TEST INSTRUMENTS.....	56
4.6.3	TEST PROCEDURE.....	56
4.6.4	DEVIATION FROM TEST STANDARD .....	56
4.6.5	EUT OPERATING CONDITION .....	57
4.6.6	TEST RESULTS – FOR CCK .....	57
4.6.7	TEST RESULTS – FOR OFDM.....	60
4.7	ANTENNA REQUIREMENT .....	63
4.7.1	STANDARD APPLICABLE.....	63
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	63
5.	TEST TYPES AND RESULTS (FOR PART 802.11A).....	64
5.1	CONDUCTED EMISSION MEASUREMENT .....	64
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	64
5.1.2	TEST INSTRUMENTS.....	64
5.1.3	TEST PROCEDURES .....	65
5.1.4	DEVIATION FROM TEST STANDARD .....	65
5.1.5	TEST SETUP .....	66
5.1.6	EUT OPERATING CONDITIONS.....	66
5.1.7	TEST RESULTS .....	67
5.2	RADIATED EMISSION MEASUREMENT .....	69
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	69
5.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	70
5.2.3	TEST INSTRUMENTS.....	71
5.2.4	TEST PROCEDURES .....	72
5.2.5	DEVIATION FROM TEST STANDARD .....	72
5.2.6	TEST SETUP .....	73
5.2.7	EUT OPERATING CONDITIONS.....	73
5.2.8	TEST RESULTS .....	74
5.3	PEAK TRANSMIT POWER MEASUREMENT .....	81
5.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....	81
5.3.2	TEST INSTRUMENTS.....	81
5.3.3	TEST PROCEDURE.....	82
5.3.4	DEVIATION FROM TEST STANDARD .....	82
5.3.5	TEST SETUP .....	82
5.3.6	EUT OPERATING CONDITIONS.....	82
5.3.7	TEST RESULTS .....	83
5.4	PEAK POWER EXCURSION MEASUREMENT .....	96
5.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....	96
5.4.2	TEST INSTRUMENTS.....	96
5.4.3	TEST PROCEDURE.....	97
5.4.4	DEVIATION FROM TEST STANDARD .....	97
5.4.5	TEST SETUP .....	97
5.4.6	EUT OPERATING CONDITIONS.....	97
5.4.7	TEST RESULTS .....	98
5.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	105



5.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT ..... 105

5.5.2 TEST INSTRUMENTS..... 105

5.5.3 TEST PROCEDURES ..... 106

5.5.4 DEVIATION FROM TEST STANDARD ..... 106

5.5.5 TEST SETUP ..... 106

5.5.6 EUT OPERATING CONDITIONS..... 106

5.5.7 TEST RESULTS ..... 107

5.6 FREQUENCY STABILITY..... 114

5.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT ..... 114

5.6.2 TEST INSTRUMENTS..... 114

5.6.3 TEST PROCEDURE..... 114

5.6.4 DEVIATION FROM TEST STANDARD ..... 115

5.6.5 TEST SETUP ..... 115

5.6.6 EUT OPERATING CONDITION..... 115

5.6.7 TEST RESULTS ..... 116

5.7 BAND EDGES MEASUREMENT ..... 117

5.7.1 TEST INSTRUMENTS..... 117

5.7.2 TEST PROCEDURE..... 117

5.7.3 EUT OPERATING CONDITION..... 117

5.7.4 TEST RESULTS ..... 118

5.8 ANTENNA REQUIREMENT ..... 123

5.8.1 STANDARD APPLICABLE..... 123

5.8.2 ANTENNA CONNECTED CONSTRUCTION..... 123

6. PHOTOGRAPHS OF THE TEST CONFIGURATION..... 124

7. INFORMATION ON THE TESTING LABORATORIES ..... 126



## 1. CERTIFICATION

**PRODUCT :** AirPro Dual-Band Wireless Cardbus Adapter  
**BRAND NAME :** D-Link  
**MODEL NO. :** DWL-AG650  
**APPLICANT :** D-Link Corporation  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
Subpart E (Section 15.407), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Feb. 19 ~ Mar. 11, 2003. The test record data evaluation and Equipment under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**CHECKED BY:** *Kelsey Chang*, **DATE:** Mar. 18, 2003  
Kelsey Chang

**APPROVED BY:** *Dr. Alan Lane*, **DATE:** Mar. 18, 2003  
Dr. Alan Lane  
Manager



## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>Standard Section</b>	<b>Test Type and Limit</b>	<b>Result</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -14.09dBuV at 0.170MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.20dBuV at 2368.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



<b>APPLIED STANDARD: 47 CFR Part 15, Subpart E</b>			
<b>Standard Section</b>	<b>Test Type</b>	<b>Result</b>	<b>REMARK</b>
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.41dBuV at 0.170MHz
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30 MHz – 40000 MHz	PASS	Meet the requirement of limit Minimum passing margin is -1.40dBuV At 5725.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	AirPro Dual-Band Wireless Cardbus Adapter
<b>MODEL NO.</b>	DWL-AG650
<b>POWER SUPPLY</b>	3.3VDC from host equipment
<b>MODULATION</b>	BPSK, QPSK, CCK, 16QAM, 64QAM
<b>TRANSFER RATE</b>	up to 54Mbps
<b>FREQUENCY RANGE</b>	802.11b: 2412MHz ~ 2462MHz 802.11a: 5.15GHz ~ 5.35GHz, 5.725GHz ~ 5.825GHz
<b>NUMBER OF CHANNEL</b>	802.11b: 11 802.11a: 12 for Normal mode
<b>CHANNEL SPACING</b>	802.11b: 5MHz 802.11a: 20MHz for Normal mode
<b>OUTPUT POWER</b>	802.11b and draft 802.11g: 17.35dBm 802.11a: 16.83dBm
<b>DATA CABLE</b>	NA
<b>ANTENNA TYPE</b>	Printed Patch antenna
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11g technology.
2. IEEE 802.11a, 802.11b, and Draft 802.11g Compliant.
3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.





### 3.2 DESCRIPTION OF TEST MODES

For 802.11b and draft 802.11g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate of 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, was chosen for final test.

For 802.11a: Eight channels are provided to this EUT for Normal mode.

Channel	Frequency	Channel	Frequency
1	5180 MHz	7	5300 MHz
2	5200 MHz	8	5320 MHz
3	5220 MHz	9	5745MHz
4	5240 MHz	10	5765MHz
5	5260 MHz	11	5785MHz
6	5280 MHz	12	5805MHz

**NOTE:**

1. The EUT was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed). The EUT was tested in both normal mode (channel bandwidth of approximately 30MHz) and turbo mode (channel bandwidth of approximately 60MHz).
2. "Normal Mode" allows data rates of up to 54Mbps. The device was, therefore, tested in Normal mode at the data rate that produced the highest output power for normal mode (6Mbps).
3. Channel 1, 4, 5, 8, 9 and 12 are the closest frequencies to the band edge, were chosen for final test of Normal Mode.



### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is an AirPro Dual-Band Wireless Cardbus Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47CFR Part 15, Subpart C. (15.247),  
Subpart E (15.407). ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Dell	PP01L	TW-09C748-12800-19O-B220	FCC DOC APPROVED
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DOC APPROVED
3	MODEM	ACEEX	1414	980020569	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

**NOTE:** All power cords of the above support units are non shielded (1.8m).



## 4. TEST TYPES AND RESULTS (FOR PART 802.11b & draft 802.11g)

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	847793/022	Mar. 12, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	July 23, 2003
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 30, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	July 23, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYBAO)	5D-FB	Cable-C05.01	July 19, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 23, 2004
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 23, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. “\*”: These equipment are used for conducted telecom port test only (if tested).
  3. The test was performed in ADT Shielded Room No. 5.
  4. The VCCI Site Registration No. is C-1093.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

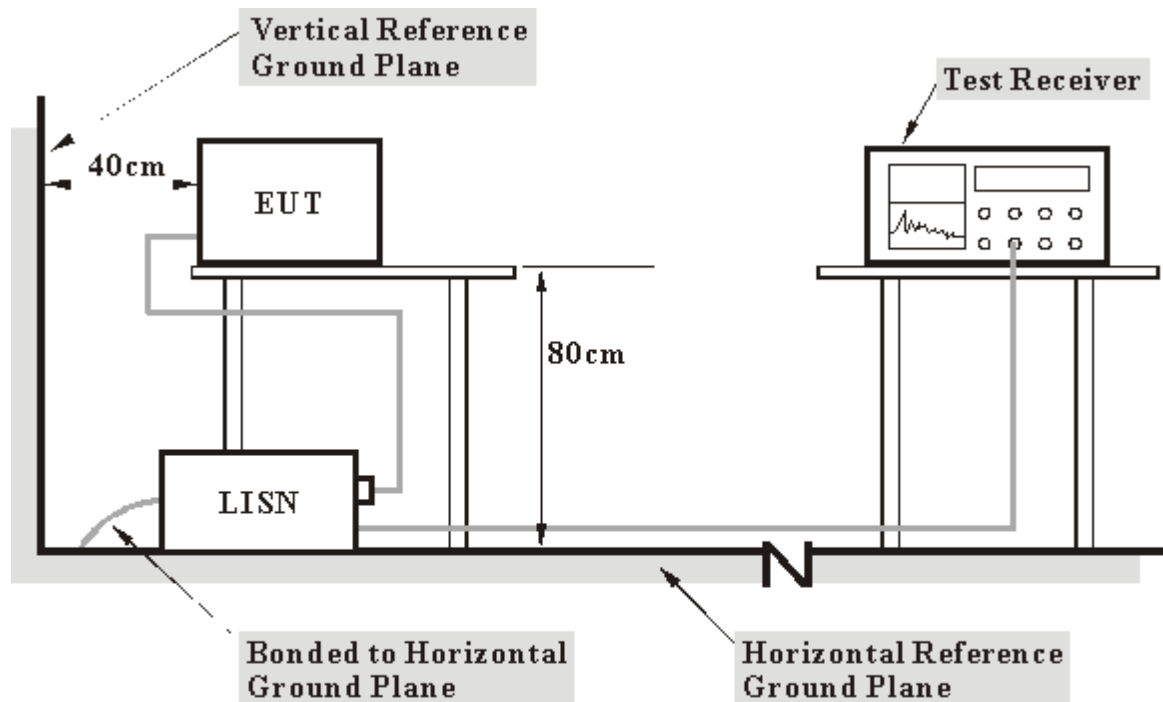

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT into the PCMCIA slot of the a computer system placed on testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to printer, and the printer prints them on paper.




4.1.7 TEST RESULTS

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.170	0.10	50.33	-	50.43	-	64.98	54.98	-14.55	-
2	0.228	0.10	42.08	-	42.18	-	62.52	52.52	-20.34	-
3	0.283	0.10	38.12	-	38.22	-	60.73	50.73	-22.51	-
4	0.396	0.10	34.35	-	34.45	-	57.93	47.93	-23.48	-
5	12.844	0.71	21.68	-	22.39	-	60.00	50.00	-37.61	-
6	19.656	1.08	24.29	-	25.37	-	60.00	50.00	-34.63	-

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

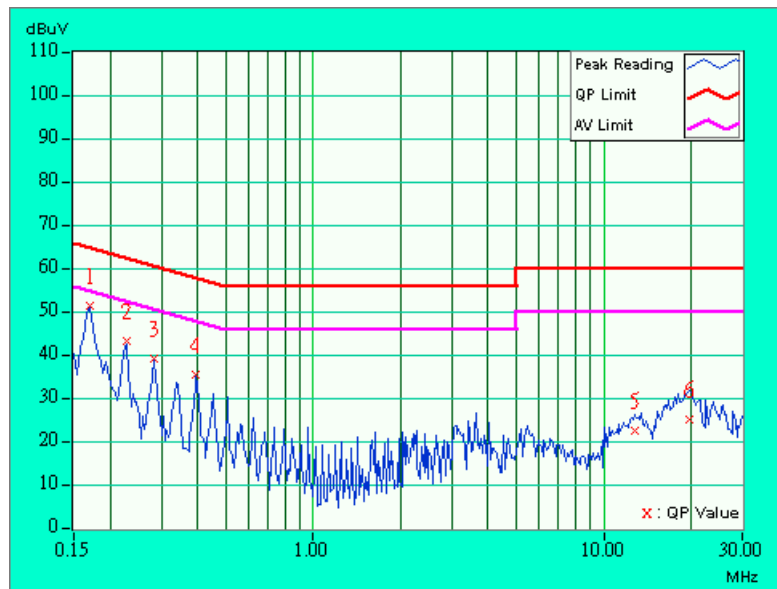




<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.170	0.10	50.79	-	50.89	-	64.98	54.98	-14.09	-
2	0.224	0.10	42.18	-	42.28	-	62.66	52.66	-20.38	-
3	0.283	0.10	38.49	-	38.59	-	60.73	50.73	-22.14	-
4	0.338	0.10	32.05	-	32.15	-	59.26	49.26	-27.11	-
5	3.793	0.29	28.40	-	28.69	-	56.00	46.00	-27.31	-
6	18.234	0.69	25.98	-	26.67	-	60.00	50.00	-33.33	-

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

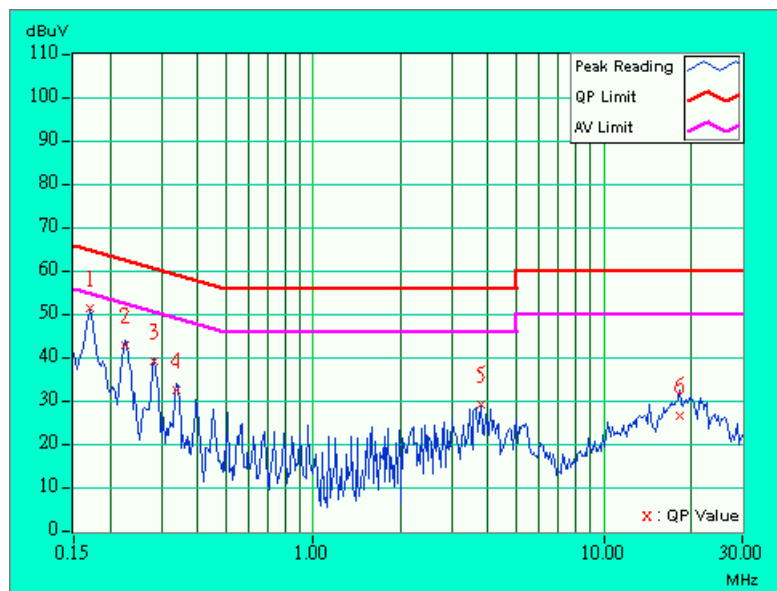






<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.170	0.10	50.08	-	50.18	-	64.98	54.98	-14.80	-
2	0.228	0.10	42.08	-	42.18	-	62.52	52.52	-20.34	-
3	0.283	0.10	37.92	-	38.02	-	60.73	50.73	-22.71	-
4	3.625	0.36	27.63	-	27.99	-	56.00	46.00	-28.01	-
5	12.742	0.71	21.71	-	22.42	-	60.00	50.00	-37.58	-
6	18.289	1.00	26.61	-	27.61	-	60.00	50.00	-32.39	-

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

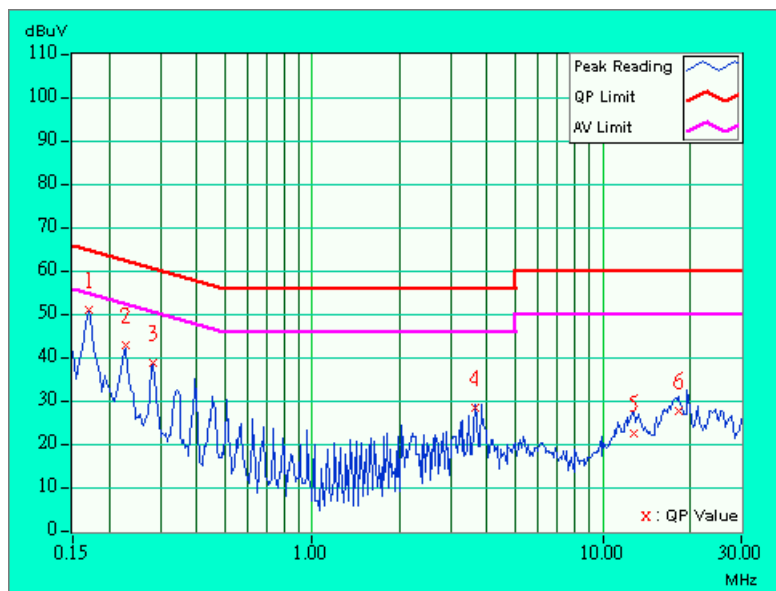




<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.173	0.10	45.85	-	45.95	-	64.79	54.79	-18.84	-
2	0.228	0.10	40.40	-	40.50	-	62.52	52.52	-22.02	-
3	0.283	0.10	35.44	-	35.54	-	60.73	50.73	-25.19	-
4	3.910	0.30	29.93	-	30.23	-	56.00	46.00	-25.77	-
5	13.434	0.47	22.61	-	23.08	-	60.00	50.00	-36.92	-
6	17.430	0.65	25.34	-	25.99	-	60.00	50.00	-34.01	-

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

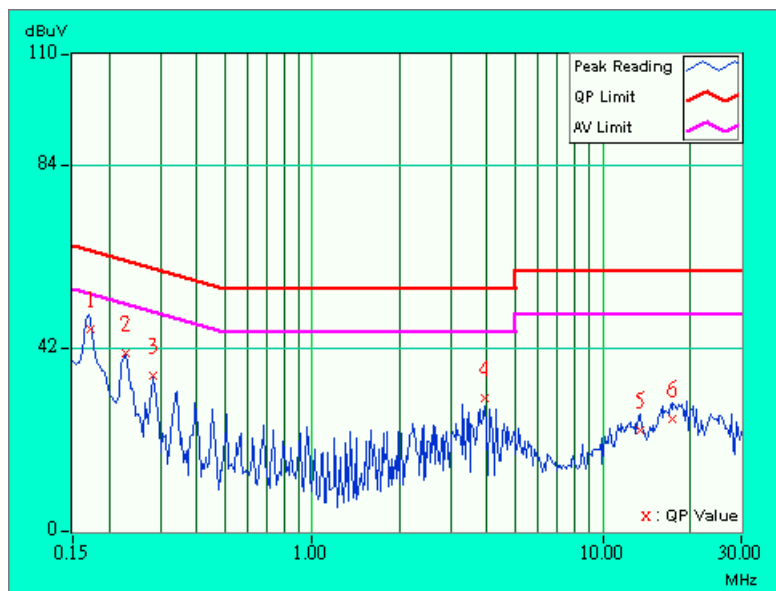




<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.170	0.10	49.36	-	49.46	-	64.98	54.98	-15.52	-
2	0.228	0.10	41.68	-	41.78	-	62.52	52.52	-20.74	-
3	0.283	0.10	37.40	-	37.50	-	60.73	50.73	-23.23	-
4	0.396	0.10	33.83	-	33.93	-	57.93	47.93	-24.00	-
5	3.914	0.39	27.49	-	27.88	-	56.00	46.00	-28.12	-
6	17.707	0.96	26.63	-	27.59	-	60.00	50.00	-32.41	-

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

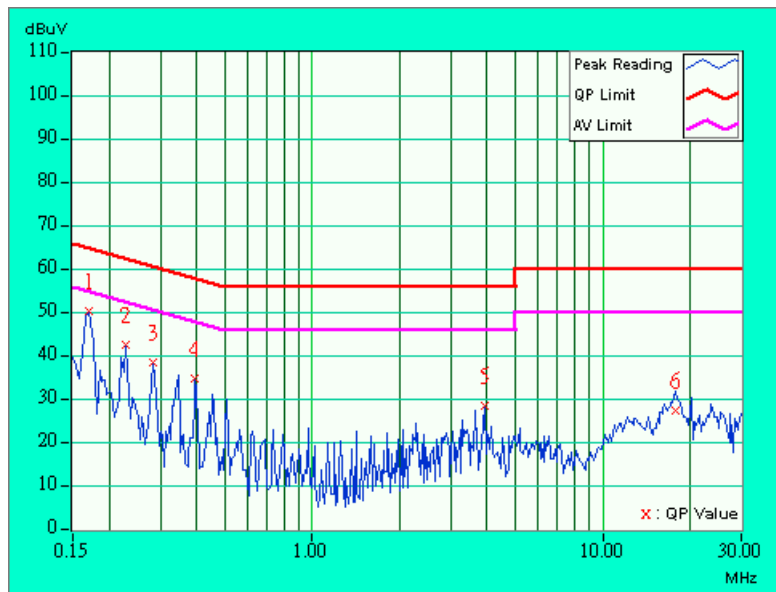




<b>EUT</b>	AirPro Dual-Band Wireless Carbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 62%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.171	0.10	36.68	-	36.78	-	64.92	54.92	-28.14	-
2	0.228	0.10	43.34	-	43.44	-	62.52	52.52	-19.08	-
3	0.287	0.10	24.12	-	24.22	-	60.62	50.62	-36.40	-
4	3.855	0.29	21.77	-	22.06	-	56.00	46.00	-33.94	-
5	12.875	0.46	20.74	-	21.20	-	60.00	50.00	-38.80	-
6	19.578	0.77	22.63	-	23.40	-	60.00	50.00	-36.60	-

Remarks:

- 1 Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2 "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3 The emission levels of other frequencies were very low against the limit.
- 4 Margin value = Emission level - Limit value
- 5 Correction factor = Insertion loss + Cable loss
- 6 Emission Level = Correction Factor + Reading Value.

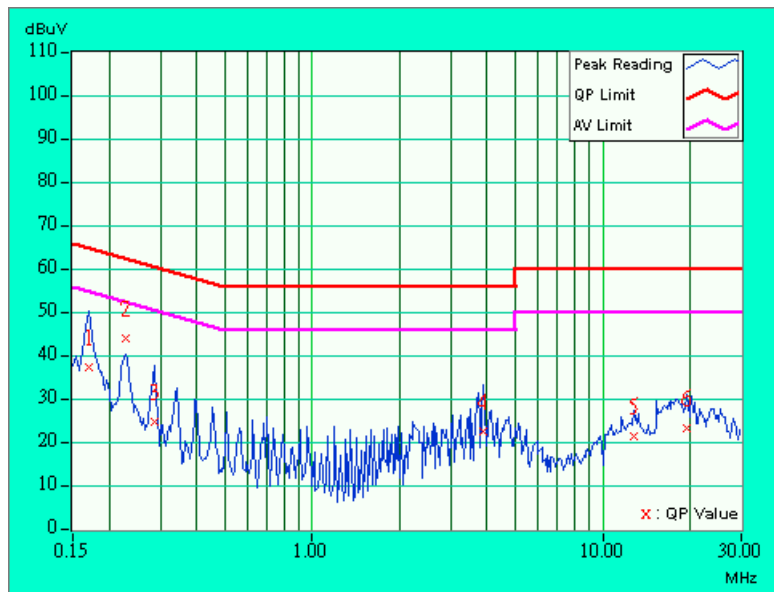



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
*Spectrum Analyzer	8593E	3926A04191	Mar. 28, 2003
*Test Receiver	ESI7	838496/016	Feb. 23, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Apr. 09, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated _V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jul. 11. 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 11. 2003

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "\*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

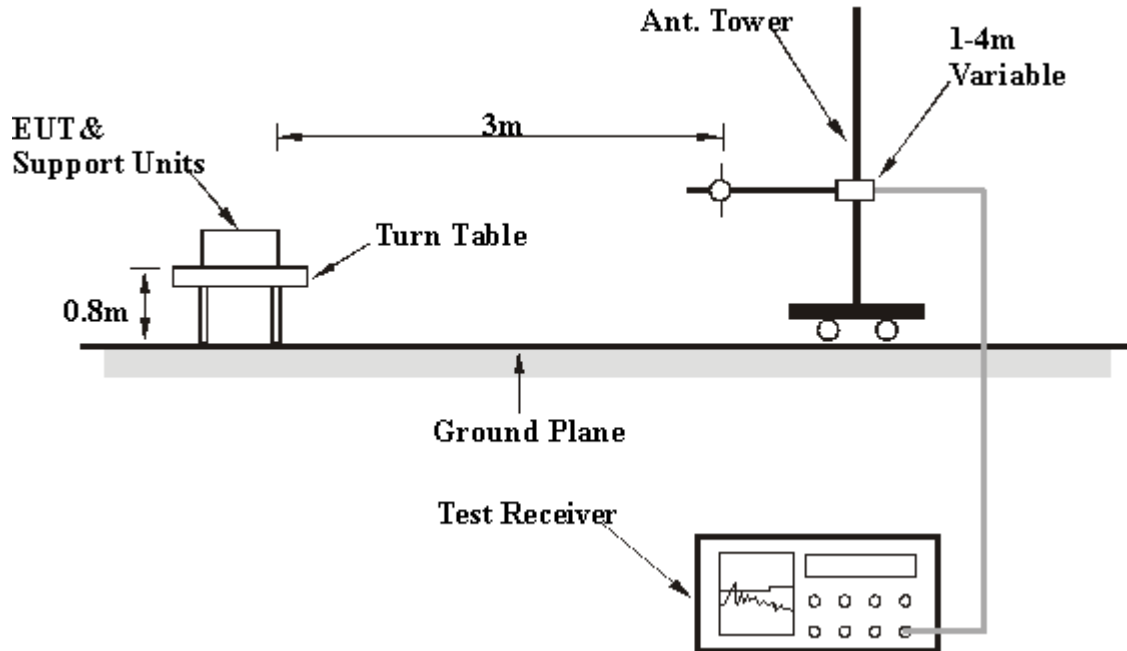

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6





## 4.2.7 TEST RESULTS

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	192.02	28.0 QP	43.50	-15.50	1.20 H	33	17.20	10.80
2	288.03	32.4 QP	46.00	-13.60	1.58 H	114	15.80	16.60
3	384.03	34.1 QP	46.00	-11.90	1.24 H	3	15.40	18.70
4	448.03	27.4 QP	46.00	-18.60	1.18 H	51	7.70	19.70
5	767.98	28.8 QP	46.00	-17.20	1.56 H	308	4.40	24.40
6	863.98	29.5 QP	46.00	-16.50	1.10 H	179	4.40	25.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.02	23.3 QP	43.50	-20.20	1.25 V	144	12.40	10.80
2	288.02	28.9 QP	46.00	-17.10	1.17 V	6	12.20	16.60
3	384.02	28.3 QP	46.00	-17.70	1.15 V	359	9.60	18.70
4	448.02	26.8 QP	46.00	-19.20	1.33 V	79	7.10	19.70
5	512.02	29.9 QP	46.00	-16.10	1.09 V	295	8.80	21.20
6	576.02	29.7 QP	46.00	-16.30	1.25 V	87	7.80	21.90
7	640.02	28.5 QP	46.00	-17.50	1.55 V	3	5.70	22.80

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



## 4.2.8 TEST RESULTS – FOR CCK

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	105.1 PK			1.23 H	111	72.40	32.80
1	*2412.00	98.6 AV			1.23 H	111	65.90	32.80
2	3168.00	43.1 PK	74.00	-30.90	1.40 H	74	9.30	33.80
3	4824.00	45.0 PK	74.00	-29.00	1.36 H	328	8.00	36.90
4	6336.00	50.9 PK	74.00	-23.10	1.14 H	27	11.80	39.10
5	7235.00	50.6 PK	74.00	-23.40	1.21 H	145	9.10	41.40
5	7235.00	40.4 AV	54.00	-13.60	1.21 H	145	-1.10	36.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	103.0 PK			1.78 V	209	70.30	32.80
1	*2412.00	97.0 AV			1.78 V	209	64.30	32.80
2	3168.00	43.7 PK	74.00	-30.30	1.45 V	87	9.90	33.80
3	4824.00	45.2 PK	74.00	-28.80	1.15 V	74	8.20	36.90
4	6336.00	50.7 PK	74.00	-23.30	1.42 V	35	11.60	39.10
4	6336.00	45.2 AV	54.00	-8.80	1.42 V	35	6.10	33.80
5	7235.00	53.9 PK	74.00	-20.10	1.29 V	20	12.50	41.40
5	7235.00	44.0 AV	54.00	-10.00	1.29 V	20	2.60	36.90

**REMARKS:**

- Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
- Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value.
- The limit value is defined as per 15.247
- “ \* ” : Fundamental frequency



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.7 PK			1.18 H	29	70.90	32.80
1	*2437.00	95.3 AV			1.18 H	29	62.50	32.80
2	3168.00	43.7 PK	74.00	-30.30	1.77 H	233	9.90	33.80
3	4874.00	47.2 PK	74.00	-26.80	1.42 H	87	10.00	37.10
4	6336.00	49.6 PK	74.00	-24.40	1.21 H	4	10.50	39.10
5	7310.00	57.8 PK	74.00	-16.20	1.60 H	307	16.20	41.50
5	7310.00	48.3 AV	54.00	-5.70	1.60 H	307	6.70	33.80
6	9748.00	54.2 PK	74.00	-19.80	1.22 H	34	10.90	43.30
6	9748.00	46.4 AV	54.00	-7.60	1.22 H	34	3.10	37.10

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.2 PK			1.01 V	113	72.40	32.80
1	*2437.00	98.8 AV			1.01 V	113	66.00	32.80
2	3168.00	43.5 PK	74.00	-30.50	1.02 V	325	9.70	33.80
3	4874.00	47.1 PK	74.00	-26.90	1.33 V	64	9.90	37.10
4	6336.00	50.0 PK	74.00	-24.00	1.58 V	13	10.90	39.10
4	6336.00	45.2 AV	54.00	-8.80	1.58 V	13	6.10	33.80
5	7311.00	58.3 PK	74.00	-15.70	1.39 V	230	16.80	41.50
5	7311.00	47.6 AV	54.00	-6.40	1.39 V	230	6.00	37.10
6	9748.00	55.7 PK	74.00	-18.30	1.08 V	245	12.40	43.30
6	9748.00	45.9 AV	54.00	-8.10	1.08 V	245	2.60	39.10

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ \* “ : Fundamental frequency



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.7 PK			1.57 H	131	77.90	32.90
1	*2462.00	102.7 AV			1.57 H	131	69.90	32.90
2	3168.00	43.6 PK	74.00	-30.40	1.12 H	47	9.80	33.80
3	4924.00	47.6 PK	74.00	-26.40	1.15 H	85	10.20	37.30
4	6336.00	49.7 PK	74.00	-24.30	1.42 H	1	10.60	39.10
5	7387.00	50.5 PK	74.00	-23.50	1.05 H	65	8.90	41.70
5	7387.00	41.5 AV	54.00	-12.50	1.05 H	65	-0.10	33.80

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.3 PK			1.57 V	131	68.50	32.90
1	*2462.00	94.7 AV			1.57 V	131	61.90	32.90
2	3168.00	43.1 PK	74.00	-30.90	1.31 V	52	9.30	33.80
3	4924.00	47.4 PK	74.00	-26.60	1.38 V	254	10.00	37.30
4	6336.00	48.9 PK	74.00	-25.10	1.09 V	4	9.80	39.10
5	7386.00	52.5 PK	74.00	-21.50	1.07 V	284	10.90	41.70
5	7386.00	43.5 AV	54.00	-10.50	1.07 V	284	1.90	33.80

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ \* “ : Fundamental frequency



4.2.9 TEST RESULTS – FOR OFDM

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	63.8 PK	74.00	-10.20	1.28 H	144	34.30	29.50
1	2368.00	52.8 AV	54.00	-1.20	1.28 H	144	23.30	29.50
2	*2412.00	101.9 PK			1.20 H	135	72.30	29.60
2	*2412.00	92.4 AV			1.20 H	135	62.80	29.60
3	3168.00	44.2 PK	74.00	-29.80	1.51 H	74	10.40	33.80
4	4824.00	45.7 PK	74.00	-28.30	1.11 H	87	8.70	36.90
5	6336.00	50.2 PK	74.00	-23.80	1.19 H	264	11.10	39.10
5	6336.00	45.0 AV	54.00	-9.00	1.19 H	264	5.90	33.80
6	7236.00	52.1 PK	74.00	-21.90	1.20 H	27	10.60	41.40
6	7236.00	42.4 AV	54.00	-11.60	1.20 H	27	0.90	36.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.20	55.1 PK	74.00	-18.90	1.00 V	302	25.60	29.50
1	2368.20	45.1 AV	54.00	-8.90	1.00 V	302	15.60	29.50
2	*2412.00	95.3 PK			1.00 V	302	65.60	29.60
2	*2412.00	86.7 AV			1.00 V	302	57.10	29.60
3	3168.00	43.1 PK	74.00	-30.90	1.19 V	34	9.30	33.80
4	4824.00	44.8 PK	74.00	-29.20	1.31 V	314	7.80	36.90
5	6336.00	49.9 PK	74.00	-24.10	1.46 V	82	10.80	39.10
6	7236.00	49.6 PK	74.00	-24.40	1.30 V	87	8.10	41.40

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ \* “ : Fundamental frequency



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	59.8 PK	74.00	-14.20	1.20 H	140	30.30	29.50
1	2368.00	52.0 AV	54.00	-2.00	1.20 H	140	22.50	29.50
2	*2437.00	98.0 PK			1.20 H	140	68.30	29.70
2	*2437.00	88.9 AV			1.20 H	140	59.10	29.70
3	3168.00	43.5 PK	74.00	-30.50	1.27 H	81	9.70	33.80
4	4874.00	46.1 PK	74.00	-27.90	1.14 H	67	8.90	37.10
5	6336.00	50.2 PK	74.00	-23.80	1.44 H	54	11.10	39.10
5	6336.00	46.2 AV	54.00	-7.80	1.44 H	54	7.10	33.80
6	7311.00	51.3 PK	74.00	-22.70	1.14 H	57	9.70	41.50
6	7311.00	41.6 AV	54.00	-12.40	1.14 H	57	0.00	37.10

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2369.00	51.2 PK	74.00	-22.80	1.00 V	306	21.70	29.50
1	2369.00	42.2 AV	54.00	-11.80	1.00 V	306	12.70	29.50
2	*2437.00	97.7 PK			1.00 V	306	67.90	29.70
2	*2437.00	87.0 AV			1.00 V	306	57.30	29.70
3	2498.00	52.4 PK	74.00	-21.60	1.00 V	306	22.50	30.00
3	2498.00	42.5 AV	54.00	-11.50	1.00 V	306	12.60	30.00
4	3168.00	43.5 PK	74.00	-30.50	1.26 V	74	9.70	33.80
5	4874.00	46.1 PK	74.00	-27.90	1.11 V	37	8.90	37.10
6	6336.00	50.0 PK	74.00	-24.00	1.32 V	42	10.90	39.10
7	7311.00	51.5 PK	74.00	-22.50	1.19 V	274	9.90	41.50
7	7311.00	42.3 AV	54.00	-11.70	1.19 V	274	0.70	37.10

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ \* “ : Fundamental frequency



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	57.0 PK	74.00	-17.00	1.20 H	135	27.50	29.50
1	2368.00	51.3 AV	54.00	-2.70	1.20 H	135	21.80	29.50
2	*2462.00	97.6 PK			1.23 H	138	67.70	29.80
2	*2462.00	88.7 AV			1.23 H	138	58.90	29.80
3	2496.00	54.4 PK	74.00	-19.60	1.20 H	135	24.50	29.90
3	2496.00	46.2 AV	54.00	-7.80	1.20 H	135	16.30	29.90
4	3168.00	43.3 PK	74.00	-30.70	1.18 H	352	9.50	33.80
5	4924.00	45.4 PK	74.00	-28.60	1.09 H	82	8.00	37.30
6	6336.00	51.4 PK	74.00	-22.60	1.38 H	26	12.30	39.10
6	6336.00	46.7 AV	54.00	-7.30	1.38 H	26	7.60	33.80
7	7387.00	51.7 PK	74.00	-22.30	1.15 H	95	10.10	41.70
7	7387.00	39.5 AV	54.00	-14.50	1.15 H	95	-2.10	37.30

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.7 PK			1.00 V	298	67.90	29.80
1	*2462.00	88.6 AV			1.00 V	298	58.80	29.80
2	2496.50	52.0 PK	74.00	-22.00	1.00 V	298	22.10	29.90
2	2496.50	43.8 AV	54.00	-10.20	1.00 V	298	13.90	29.90
3	3168.00	42.5 PK	74.00	-31.50	1.25 V	38	8.70	33.80
4	4924.00	46.4 PK	74.00	-27.60	1.37 V	61	9.00	37.30
5	6336.00	49.3 PK	74.00	-24.70	1.10 V	34	10.20	39.10
6	7387.00	50.2 PK	74.00	-23.80	1.16 V	152	8.50	41.70
6	7387.00	39.3 AV	54.00	-14.70	1.16 V	152	-2.30	33.80

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ \* “ : Fundamental frequency



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.3.5 TEST SETUP



### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




## 4.3.7 TEST RESULTS – FOR CCK

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 69RH, 991 hPa
<b>TESTED BY:</b> Ansen Lei			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	12.10	0.5	PASS
6	2437	11.38	0.5	PASS
11	2462	12.26	0.5	PASS




CH1

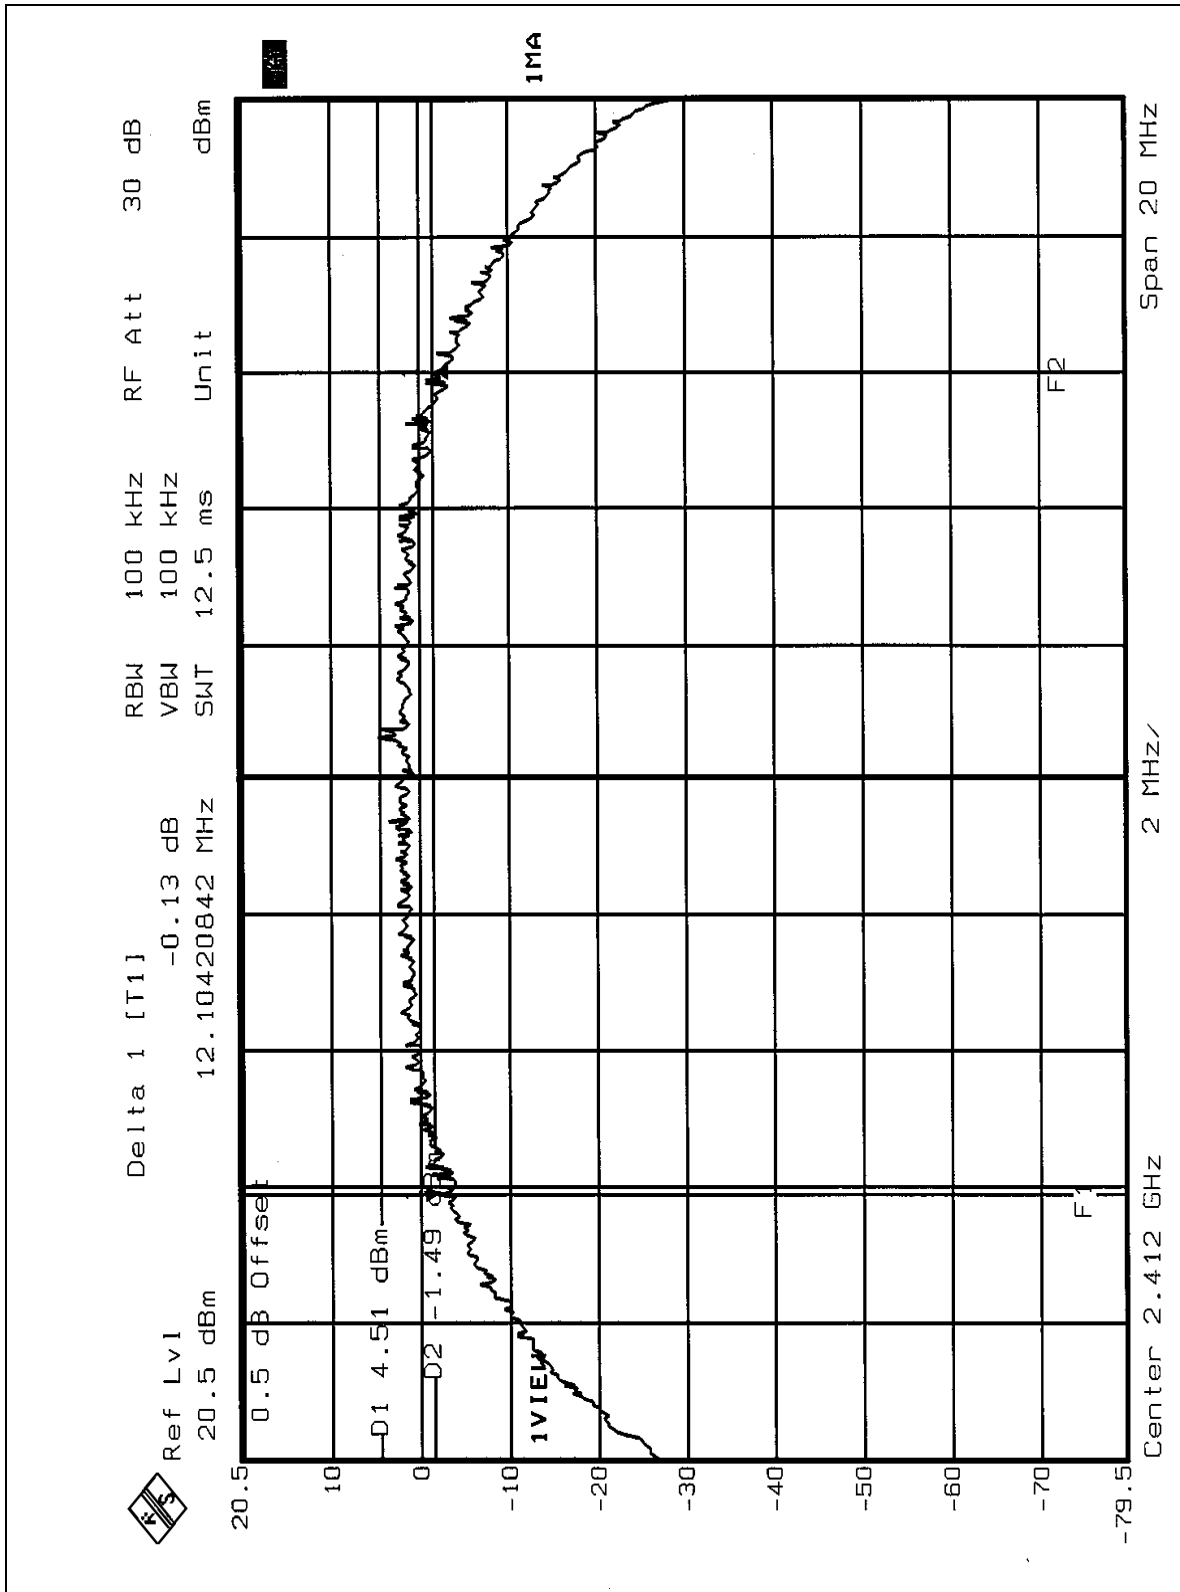




CH6

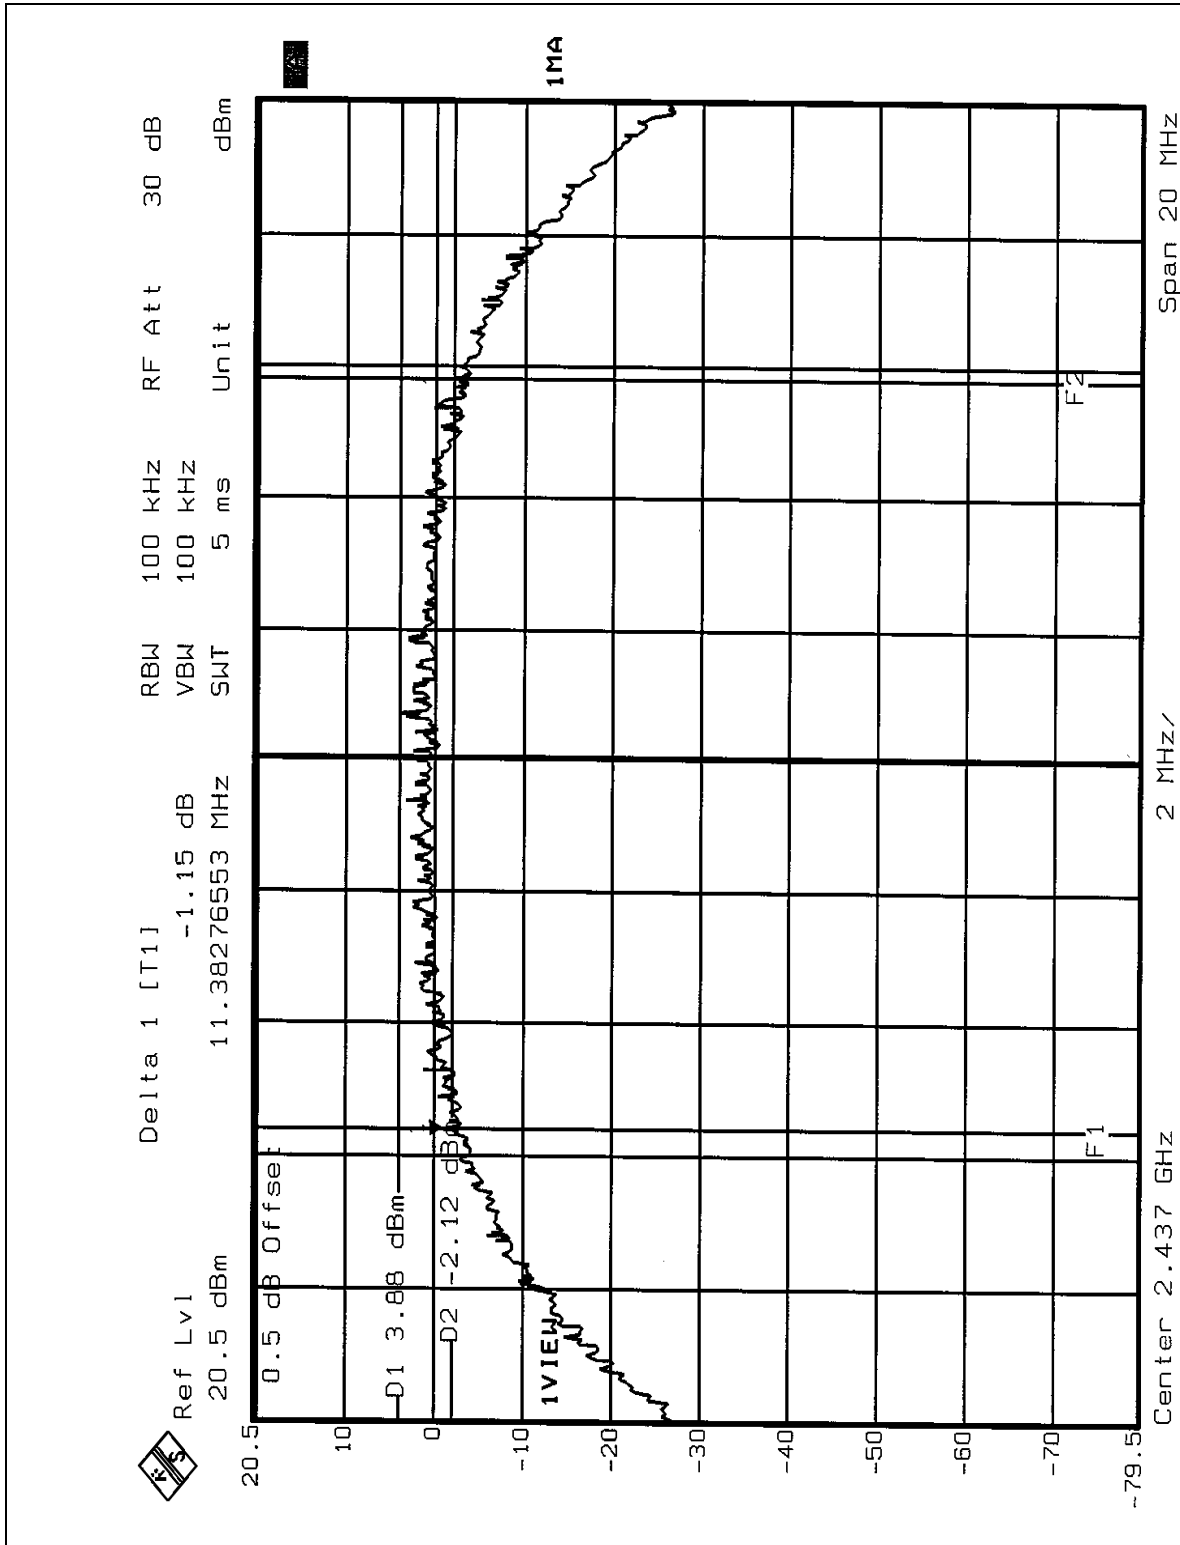



CH11

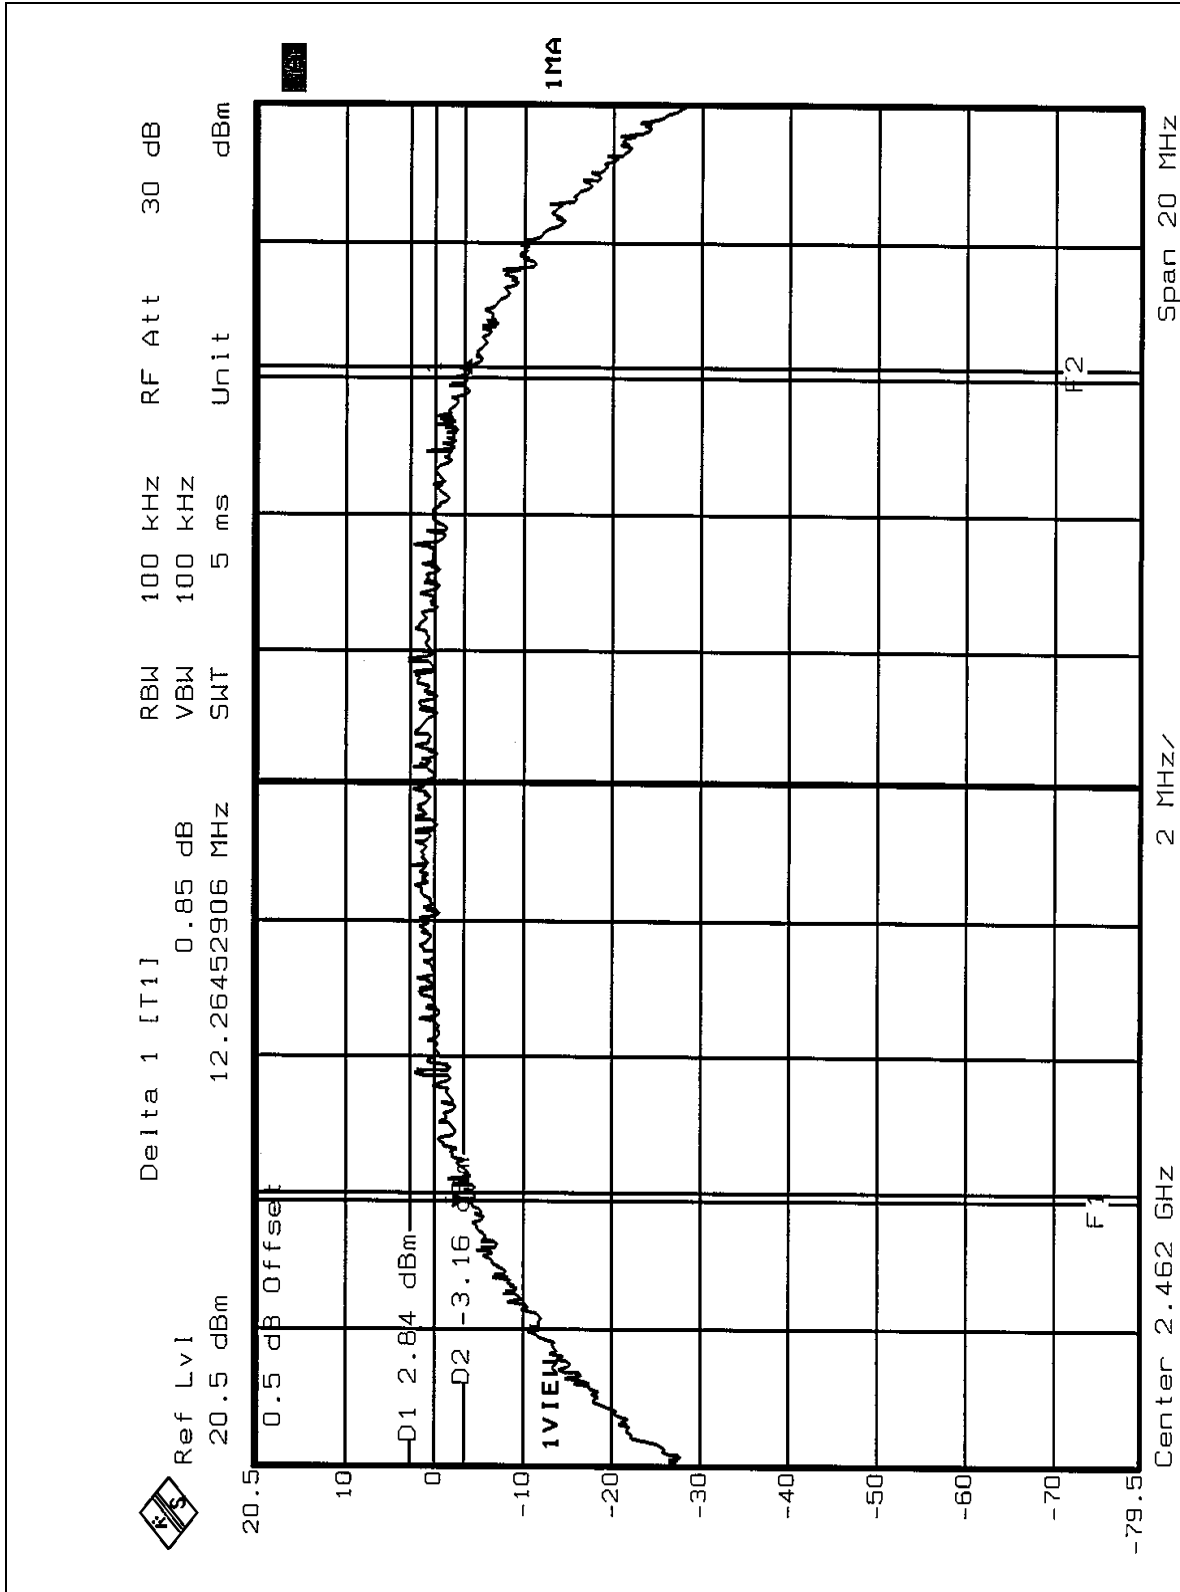




## 4.3.8 TEST RESULTS – FOR OFDM

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 68RH, 991 hPa
<b>TESTED BY:</b> Ansen Lei			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.59	0.5	PASS
6	2437	16.59	0.5	PASS
11	2462	16.51	0.5	PASS




CH1

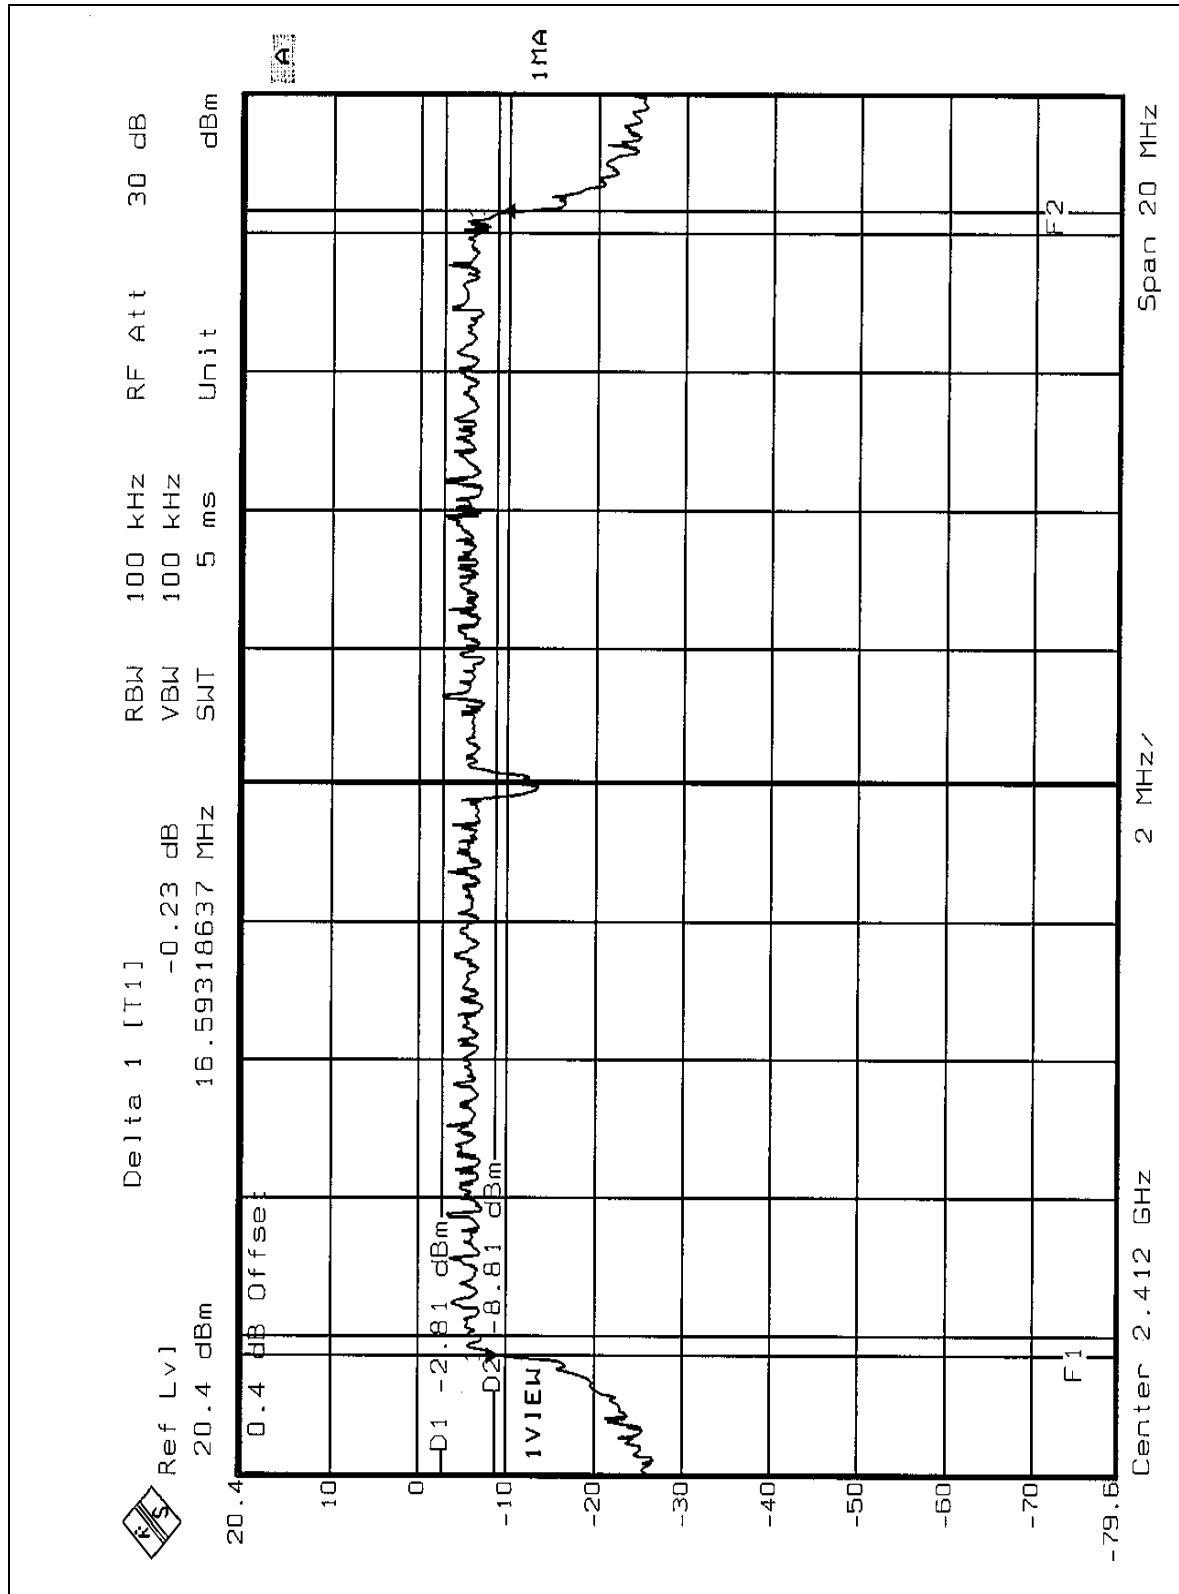




CH6

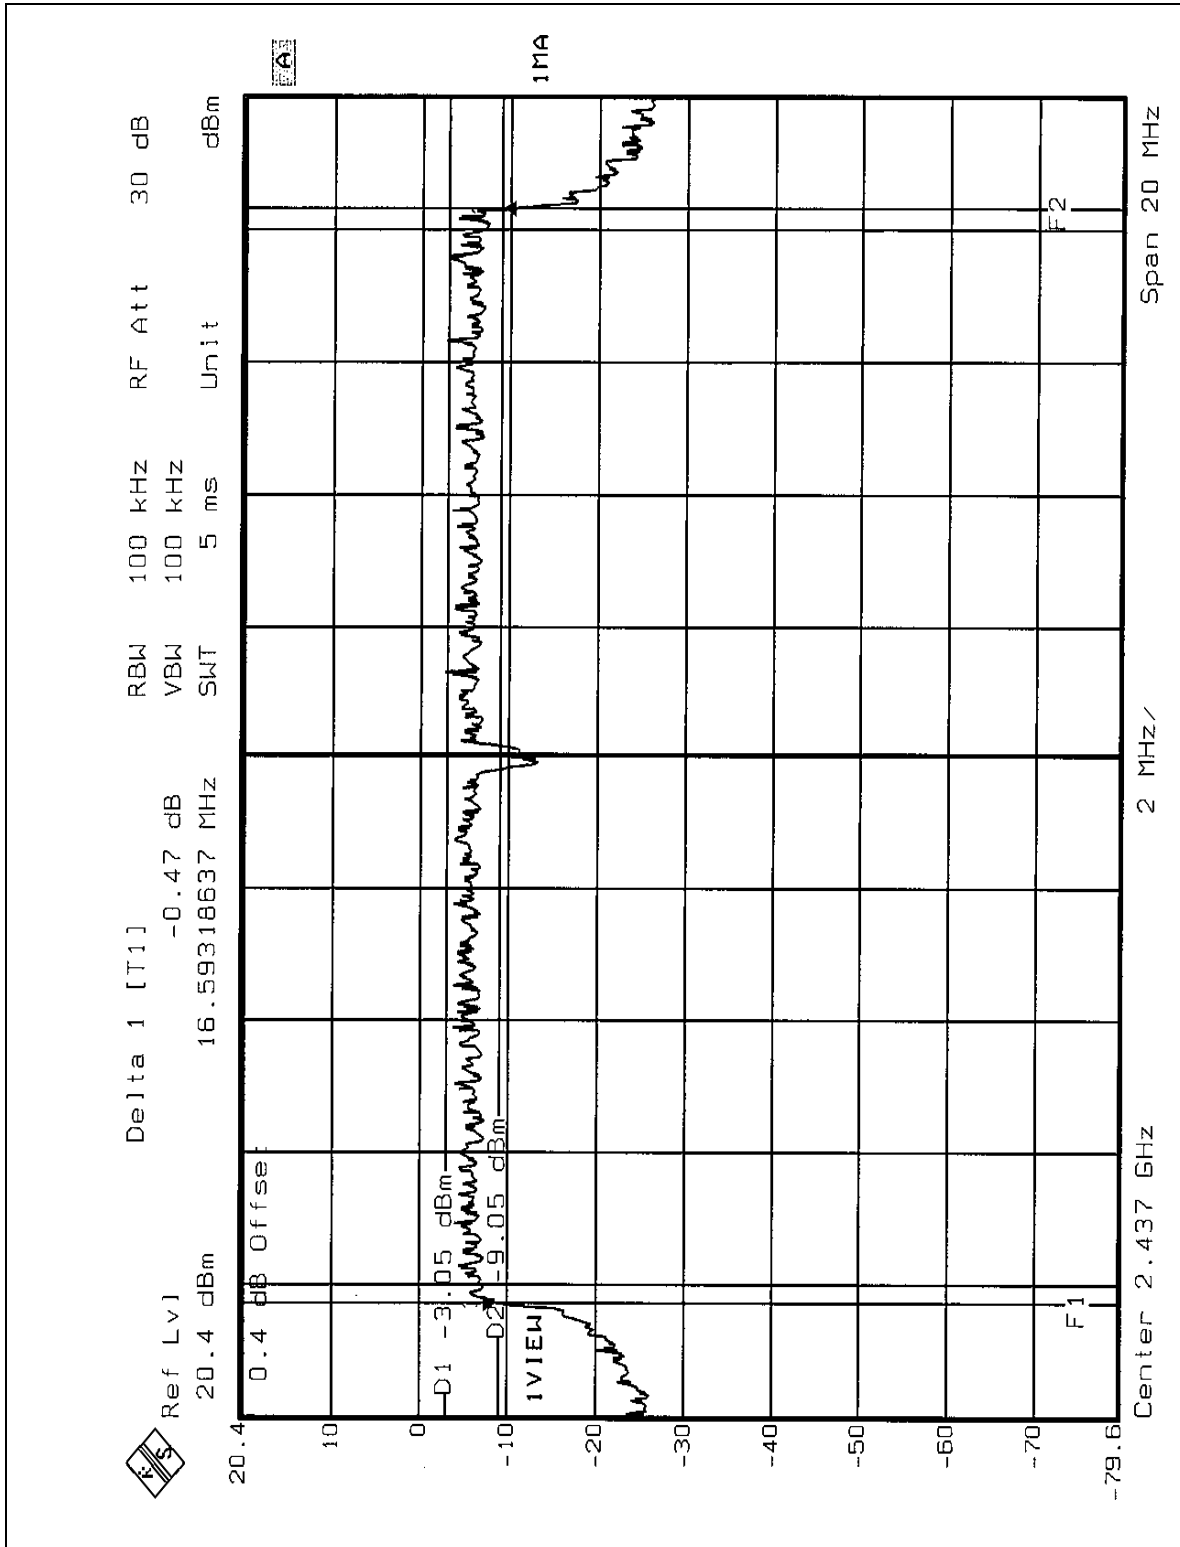





CH11

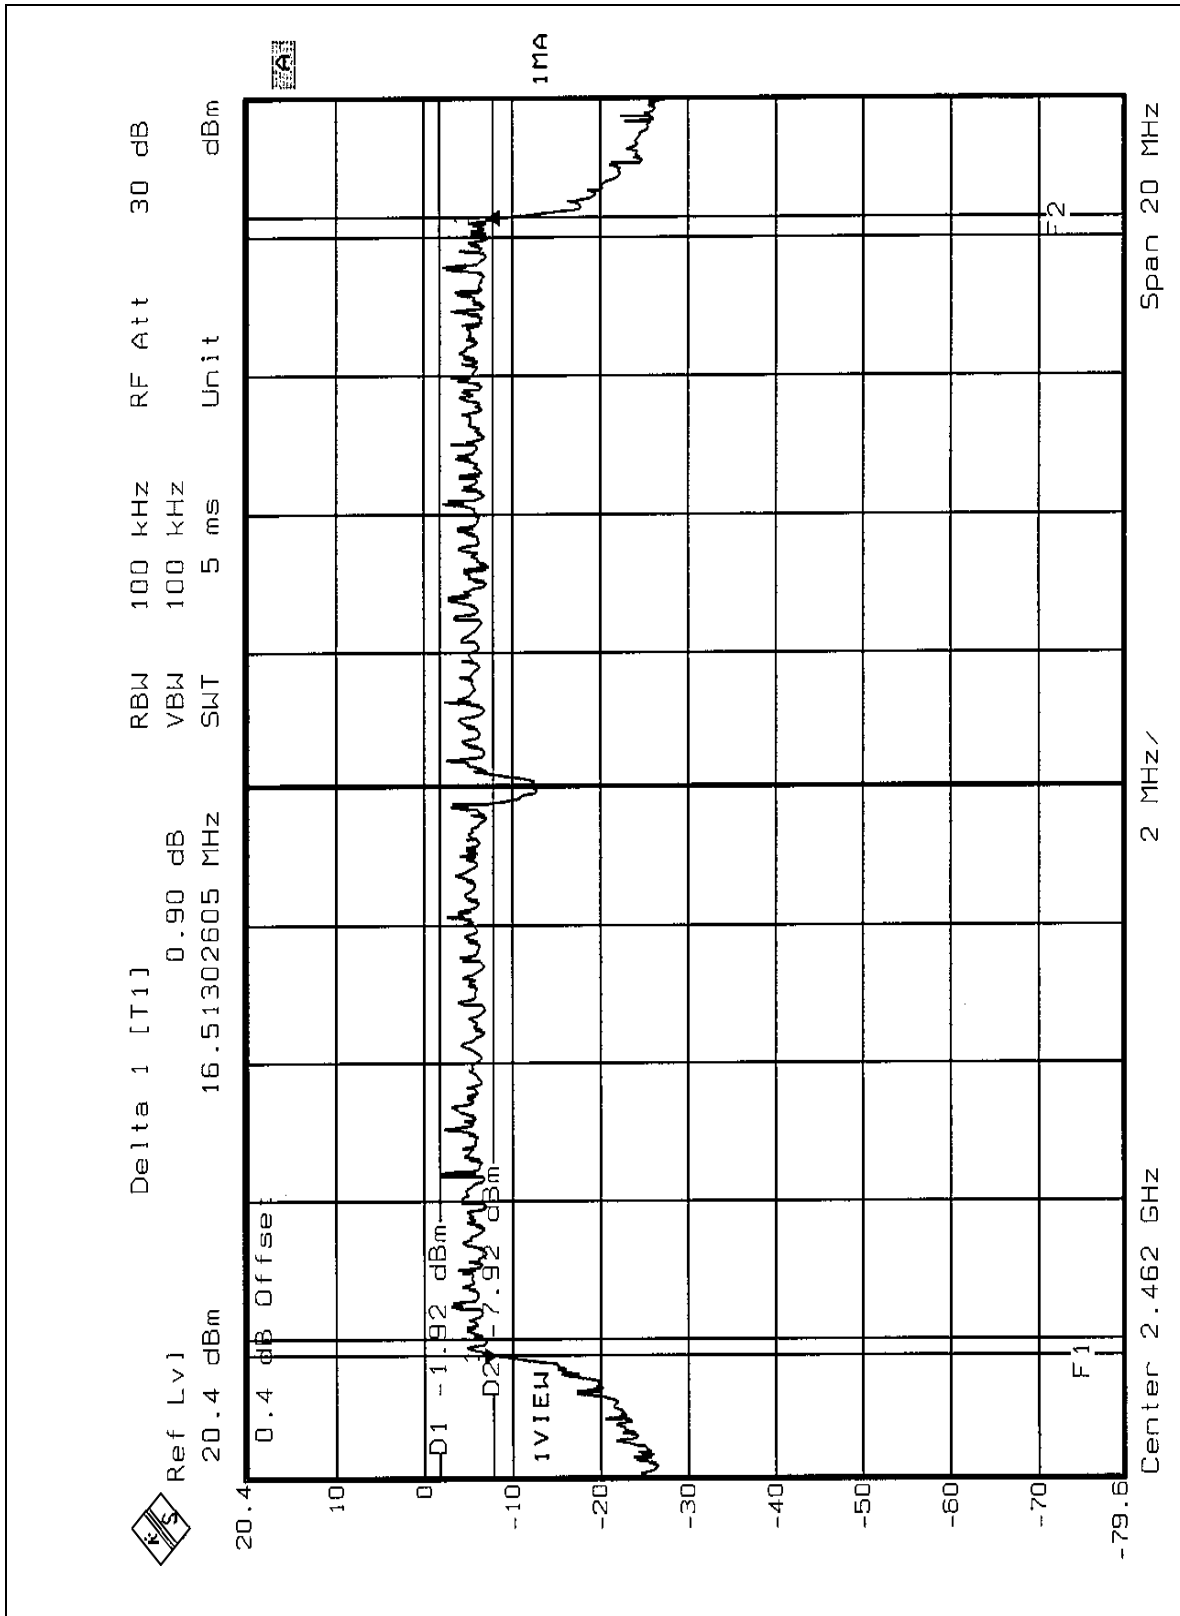



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
POWER METER	E4416A	GB41291118	Jul. 30, 2003
PEAK POWER SENSOR	E9327A	US40440722	Jul. 30, 2003

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



## 4.4.7 TEST RESULTS – FOR CCK

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg.C, 69%RH, 991 hPa
<b>TESTED BY:</b> Ansen Lei			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER OUTPUT (dBm)</b>	<b>PEAK POWER LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	16.85	30	PASS
6	2437	16.91	30	PASS
11	2462	16.65	30	PASS



## 4.4.8 TEST RESULTS – FOR OFDM

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	21deg.C, 68%RH, 991 hPa
<b>TESTED BY:</b> Ansen Lei			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER OUTPUT (dBm)</b>	<b>PEAK POWER LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	17.35	30	PASS
6	2437	17.12	30	PASS
11	2462	17.02	30	PASS



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



## 4.5.7 TEST RESULTS – FOR CCK


<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 69%RH, 991 hPa
<b>TESTED BY:</b> Ansen Lei			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-8.73	8	PASS
6	2437	-8.47	8	PASS
11	2462	-9.32	8	PASS






CH1

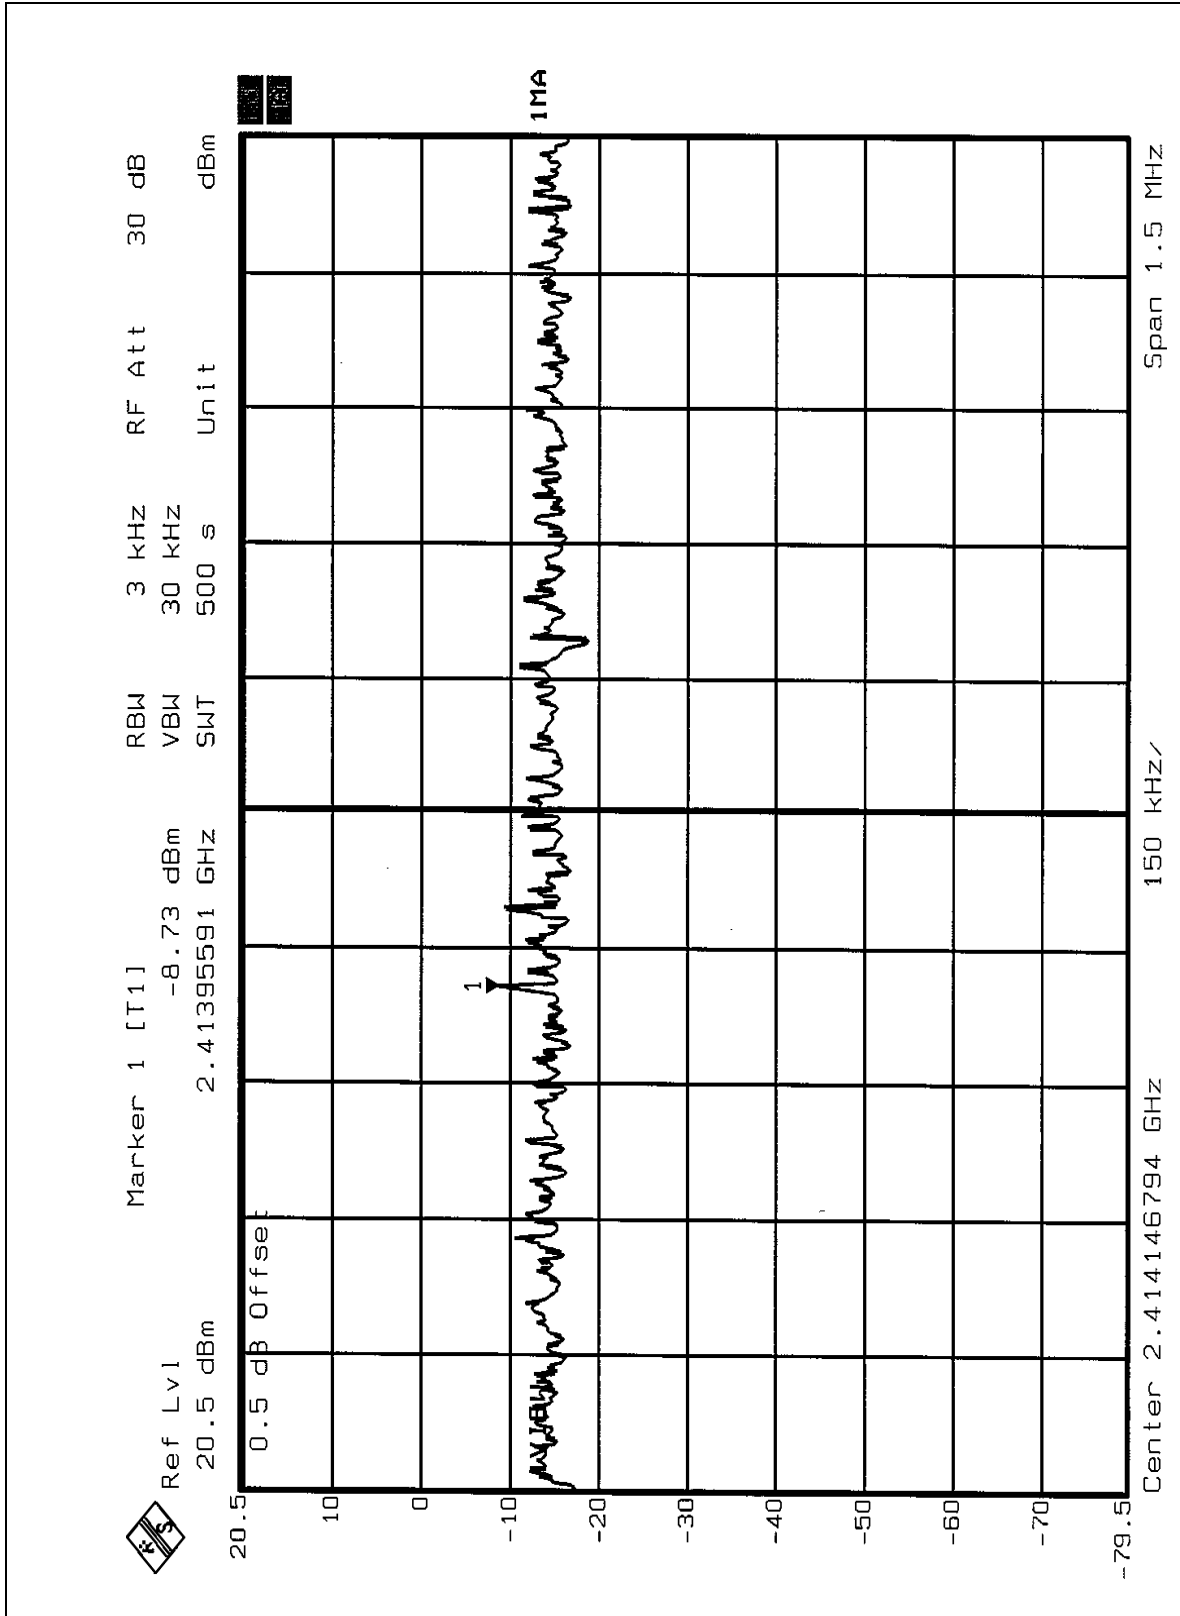




CH6

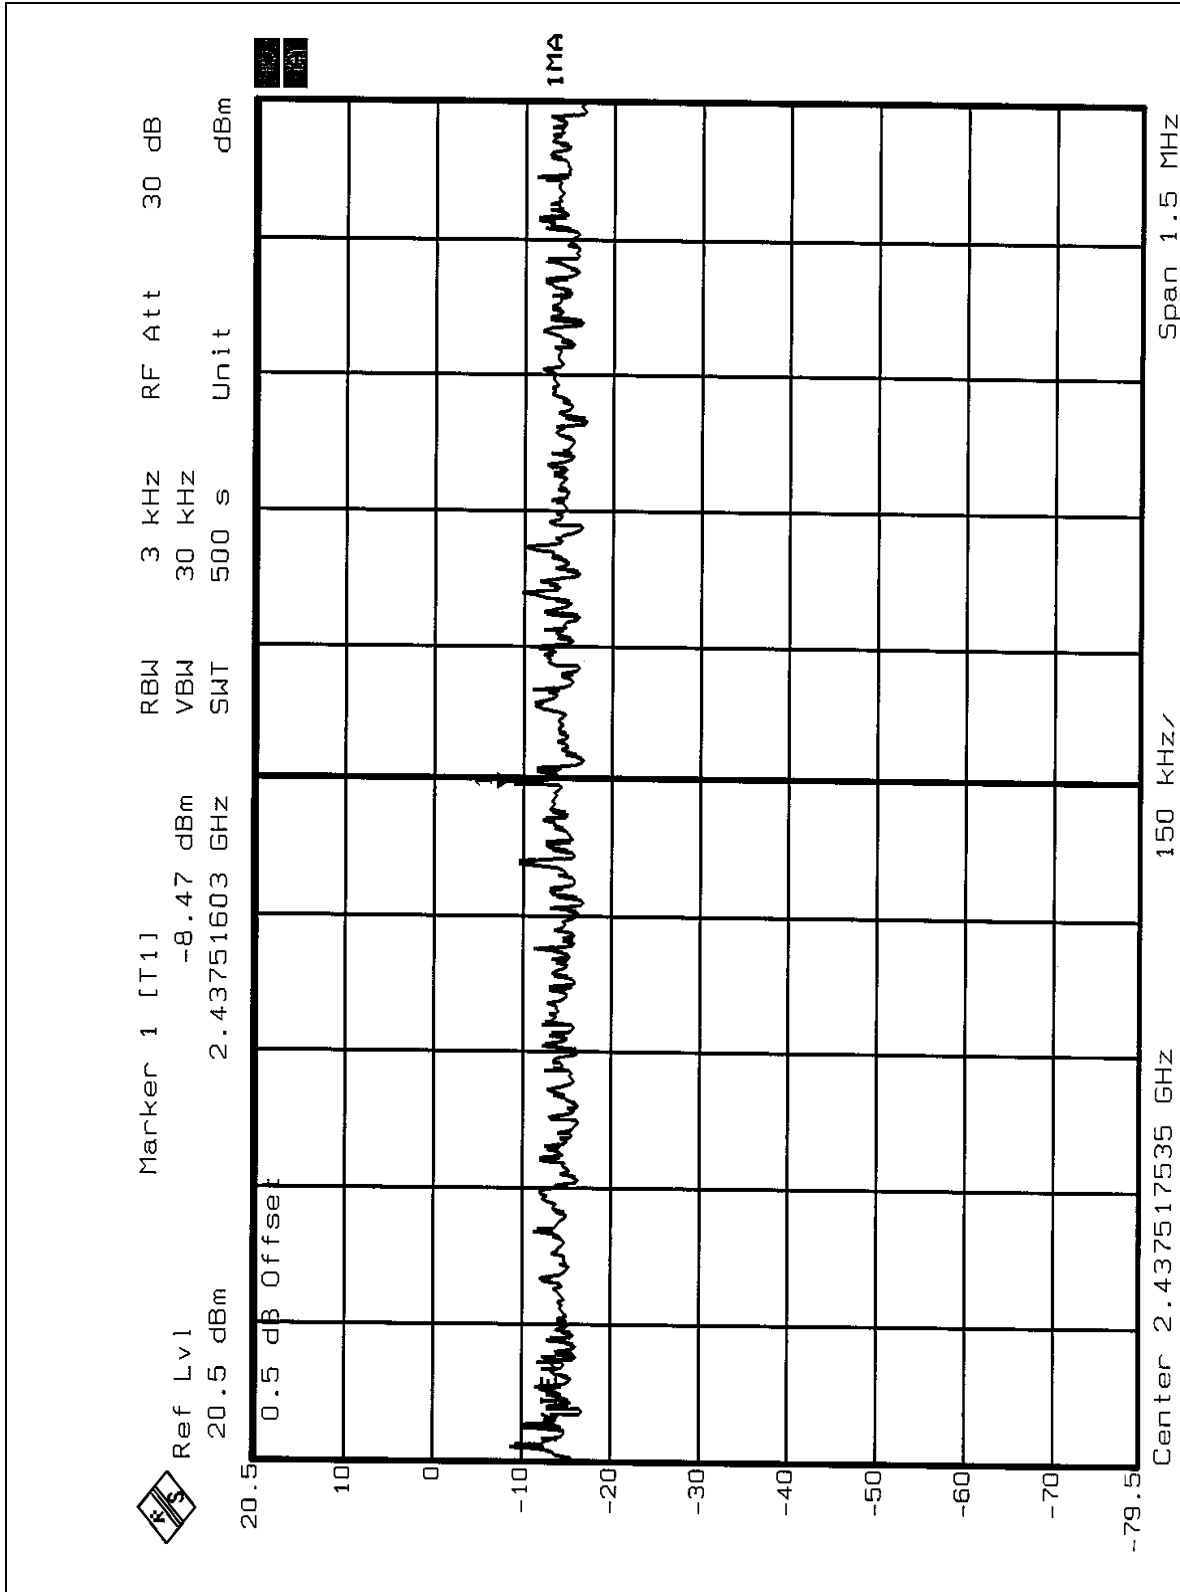



CH11

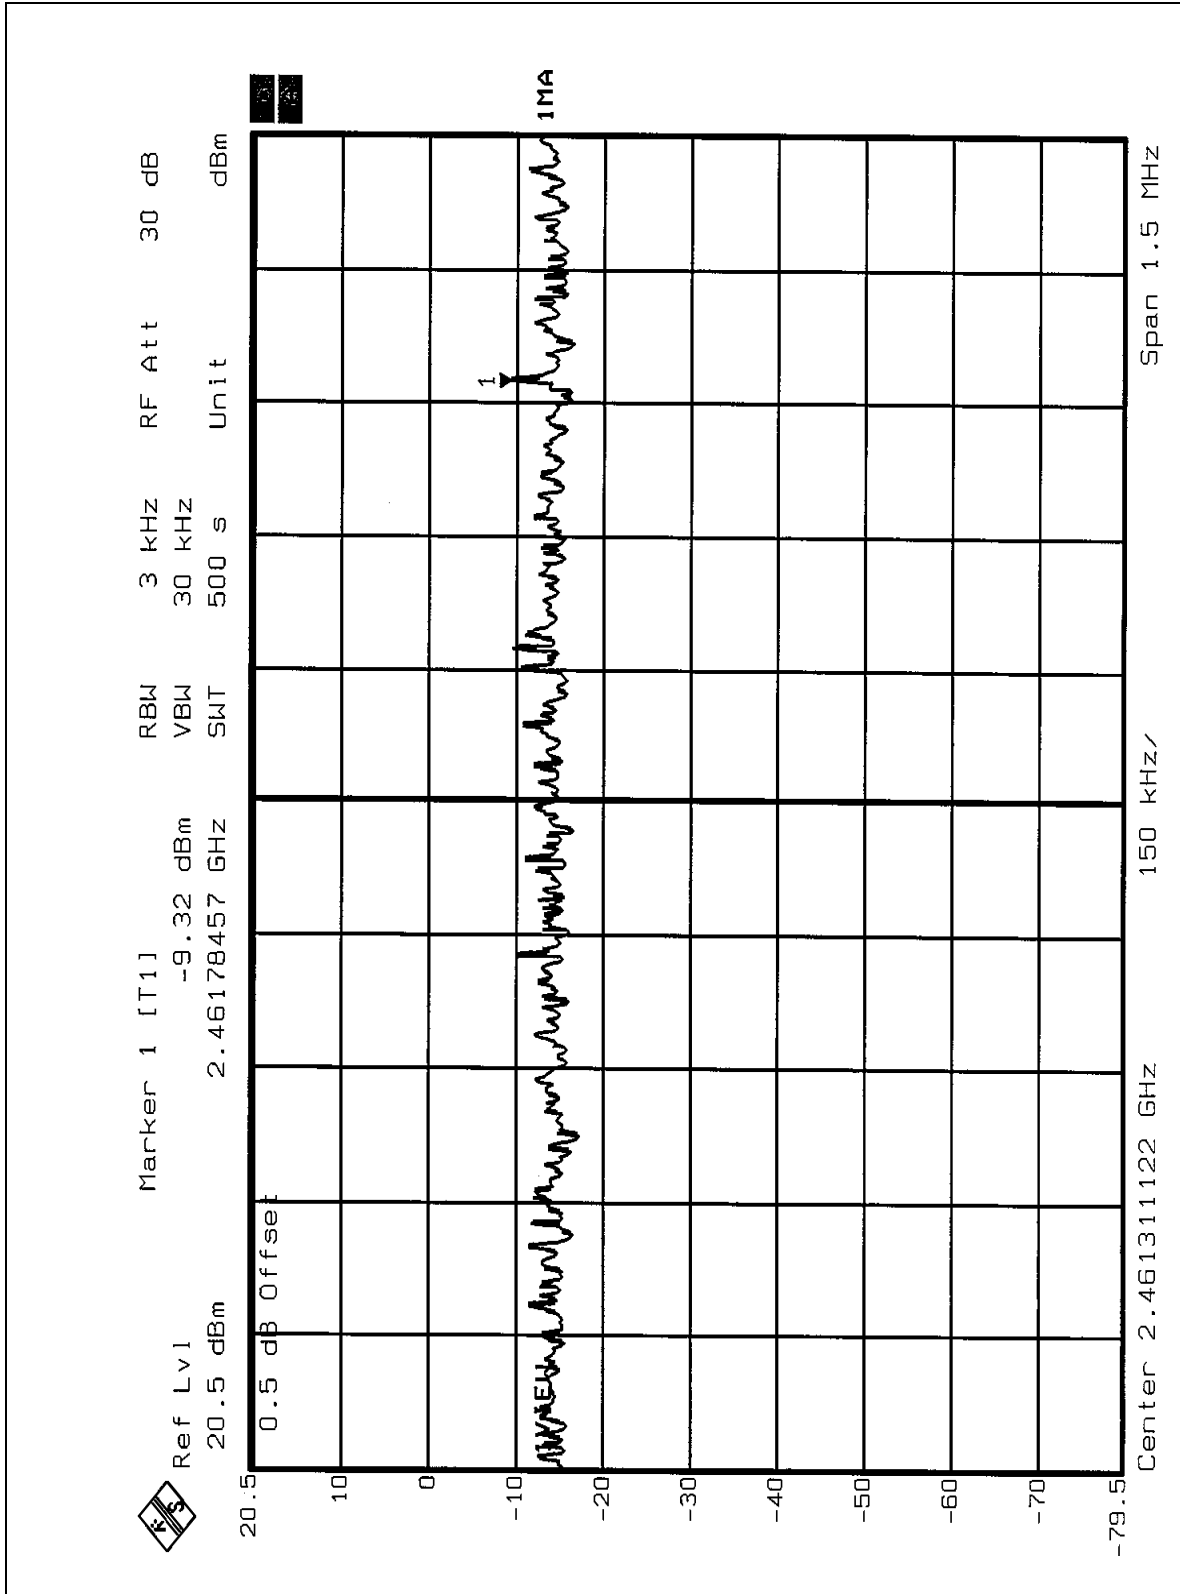




## 4.5.8 TEST RESULTS – FOR OFDM

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 69%RH, 991 hPa
<b>TESTED BY:</b> Ansen Lei			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-16.35	8	PASS
6	2437	-15.27	8	PASS
11	2462	-16.56	8	PASS




CH1

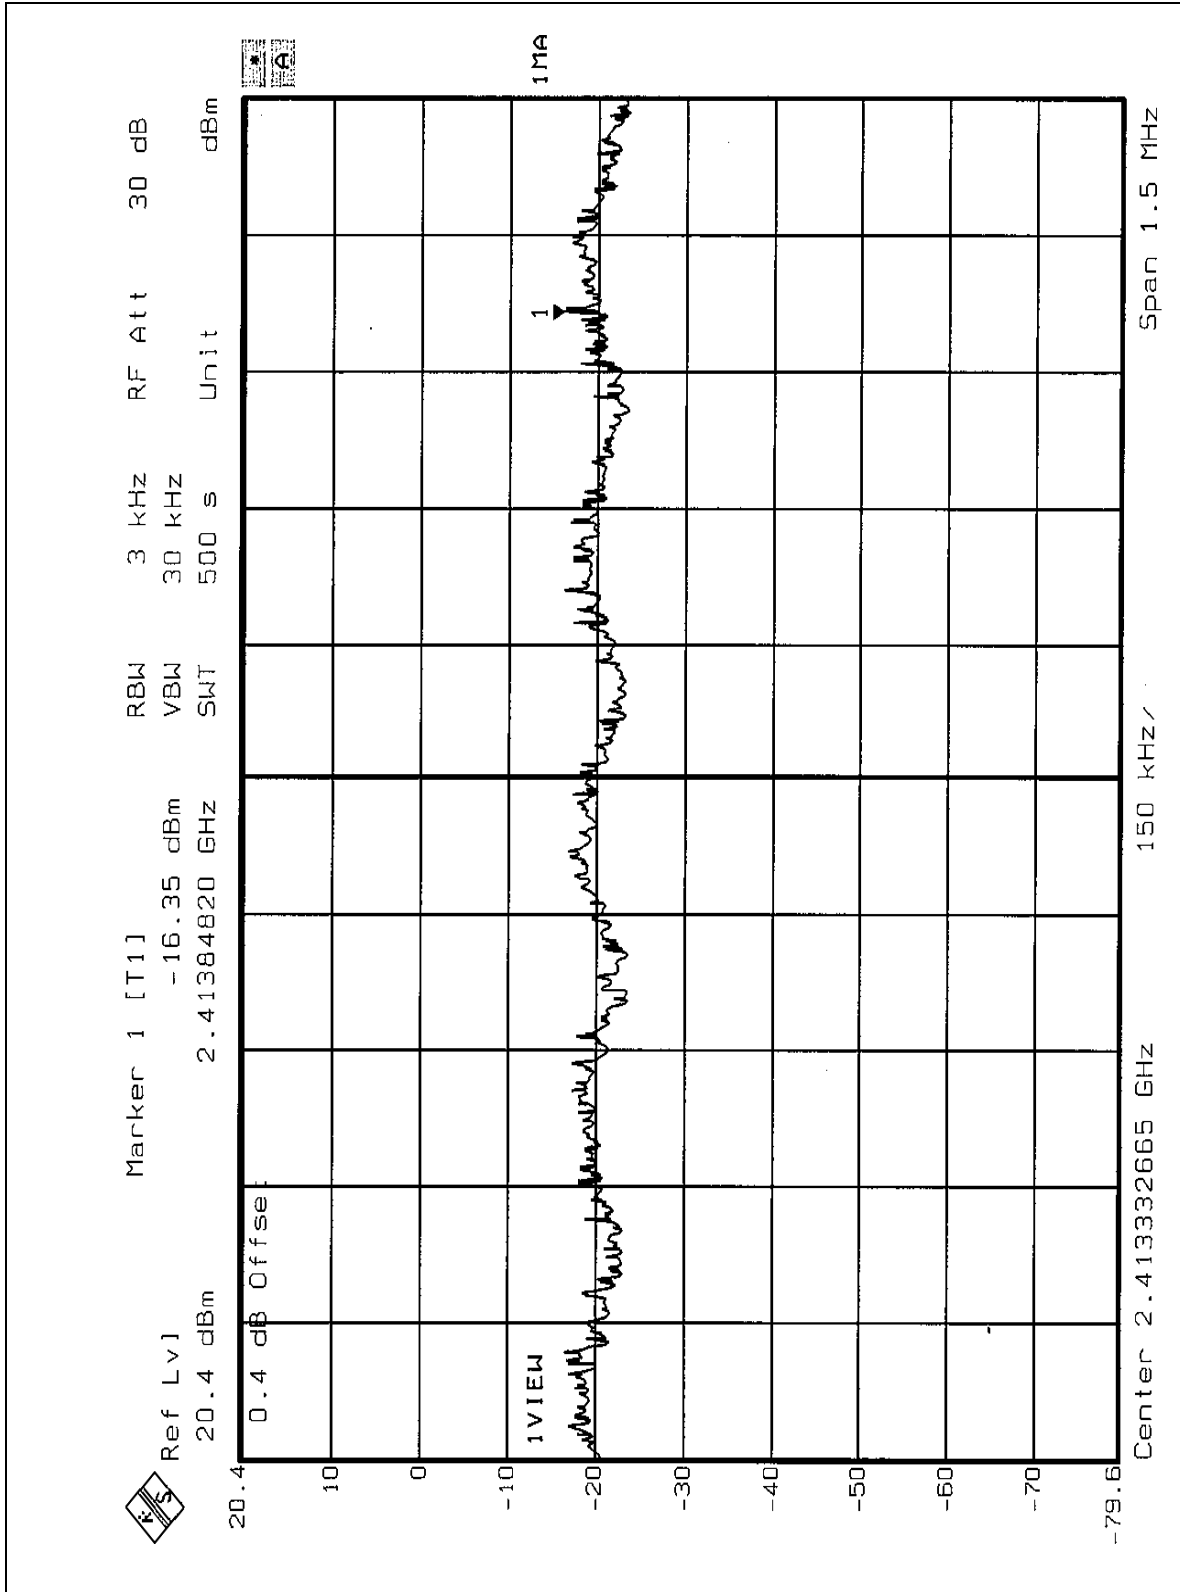




CH6

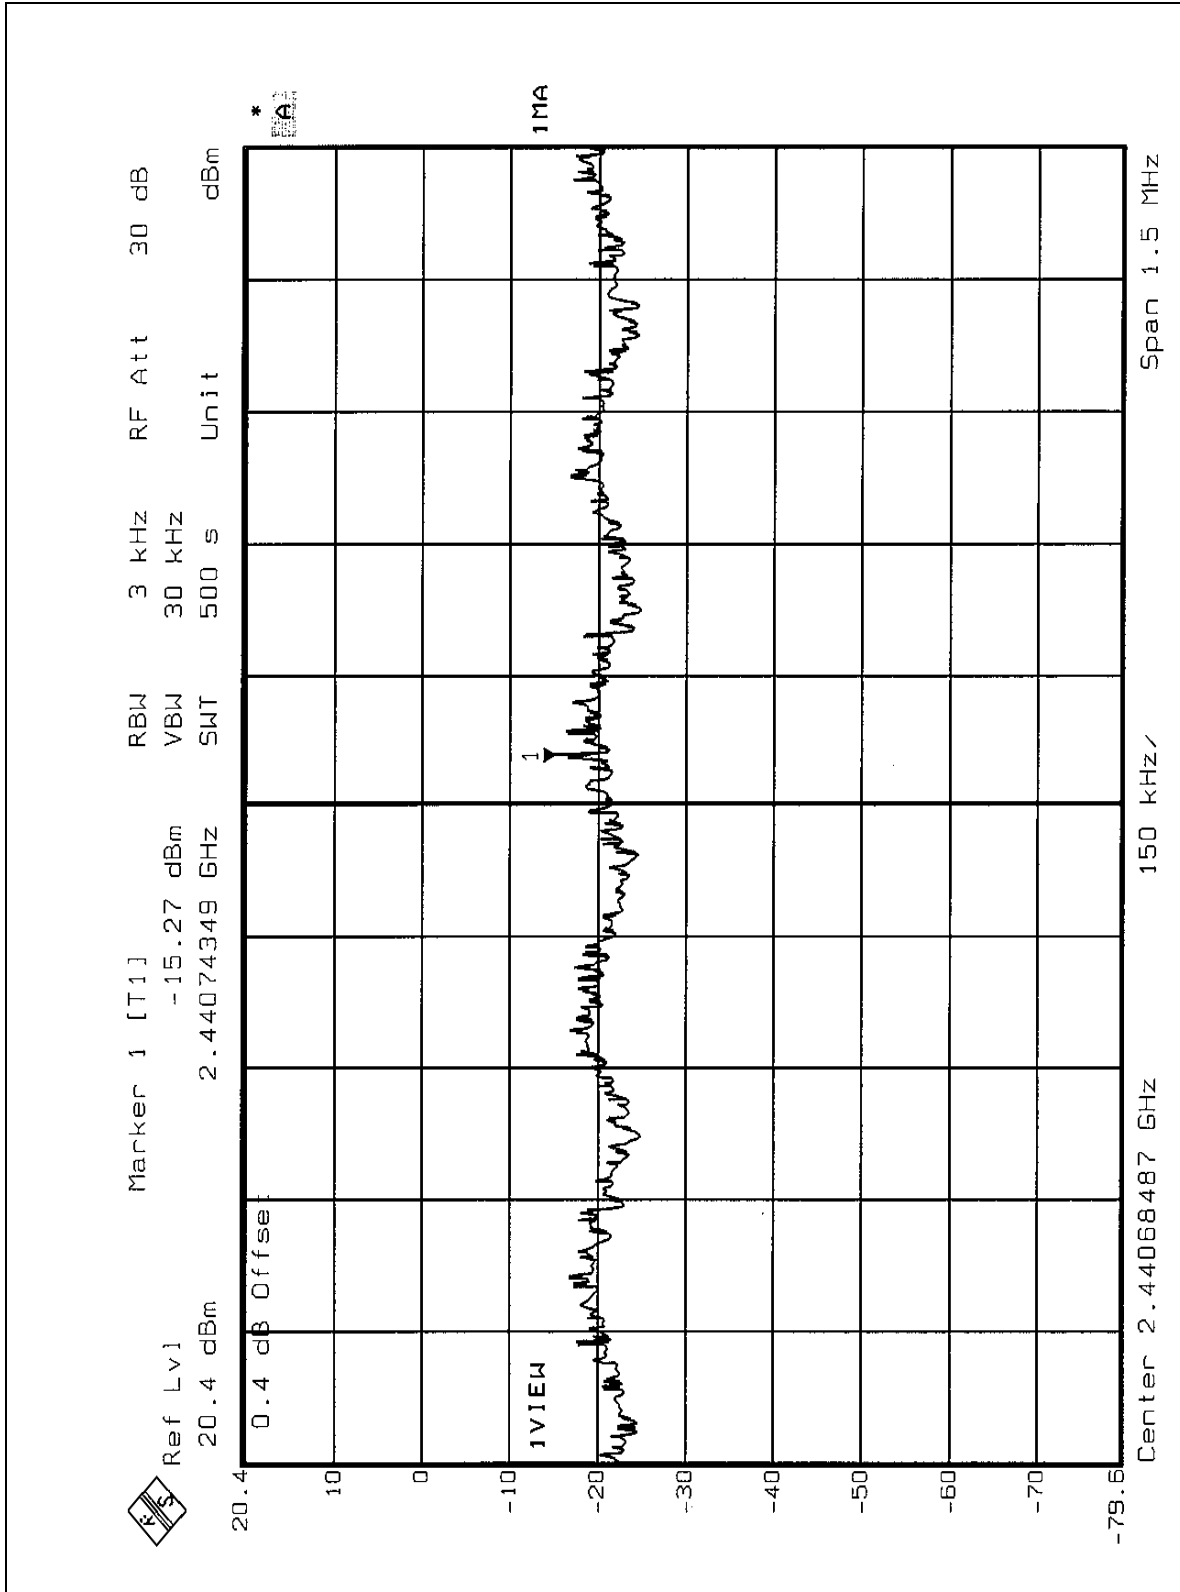



CH11

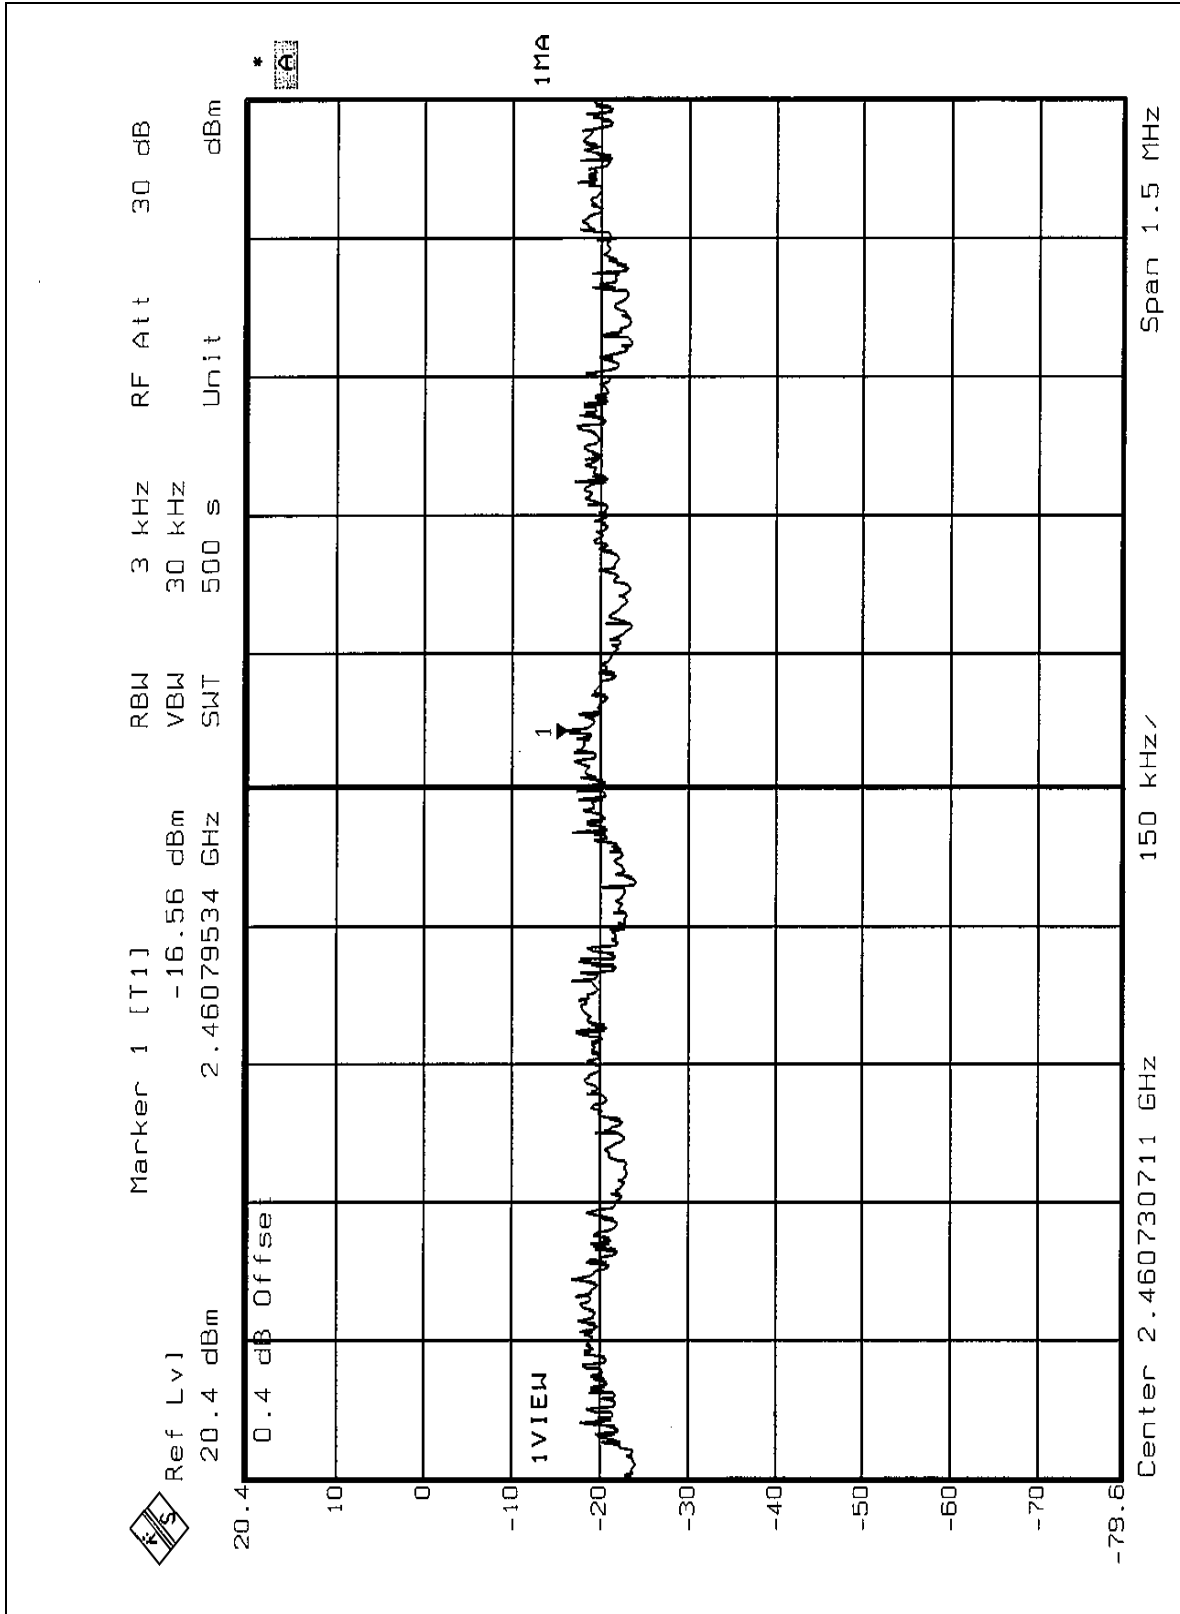



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation





#### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6


#### 4.6.6 TEST RESULTS – FOR CCK


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

**NOTE:**

The band edge emission plot on the first page shows 46.86dB delta between carrier maximum power and local maximum emission in restrict band (2.3681GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 98.6dBuV/m, so the maximum field strength in restrict band is  $98.6 - 46.86 = 51.74$ dBuV/m which is under 54dBuV/m limit.

The band edge emission plot on the second page shows 48.74dB delta between carrier maximum power and local maximum emission in restrict band (2.4961GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 102.7dBuV/m, so the maximum field strength in restrict band is  $102.7 - 48.74 = 53.96$ dBuV/m which is under 54dBuV/m limit.

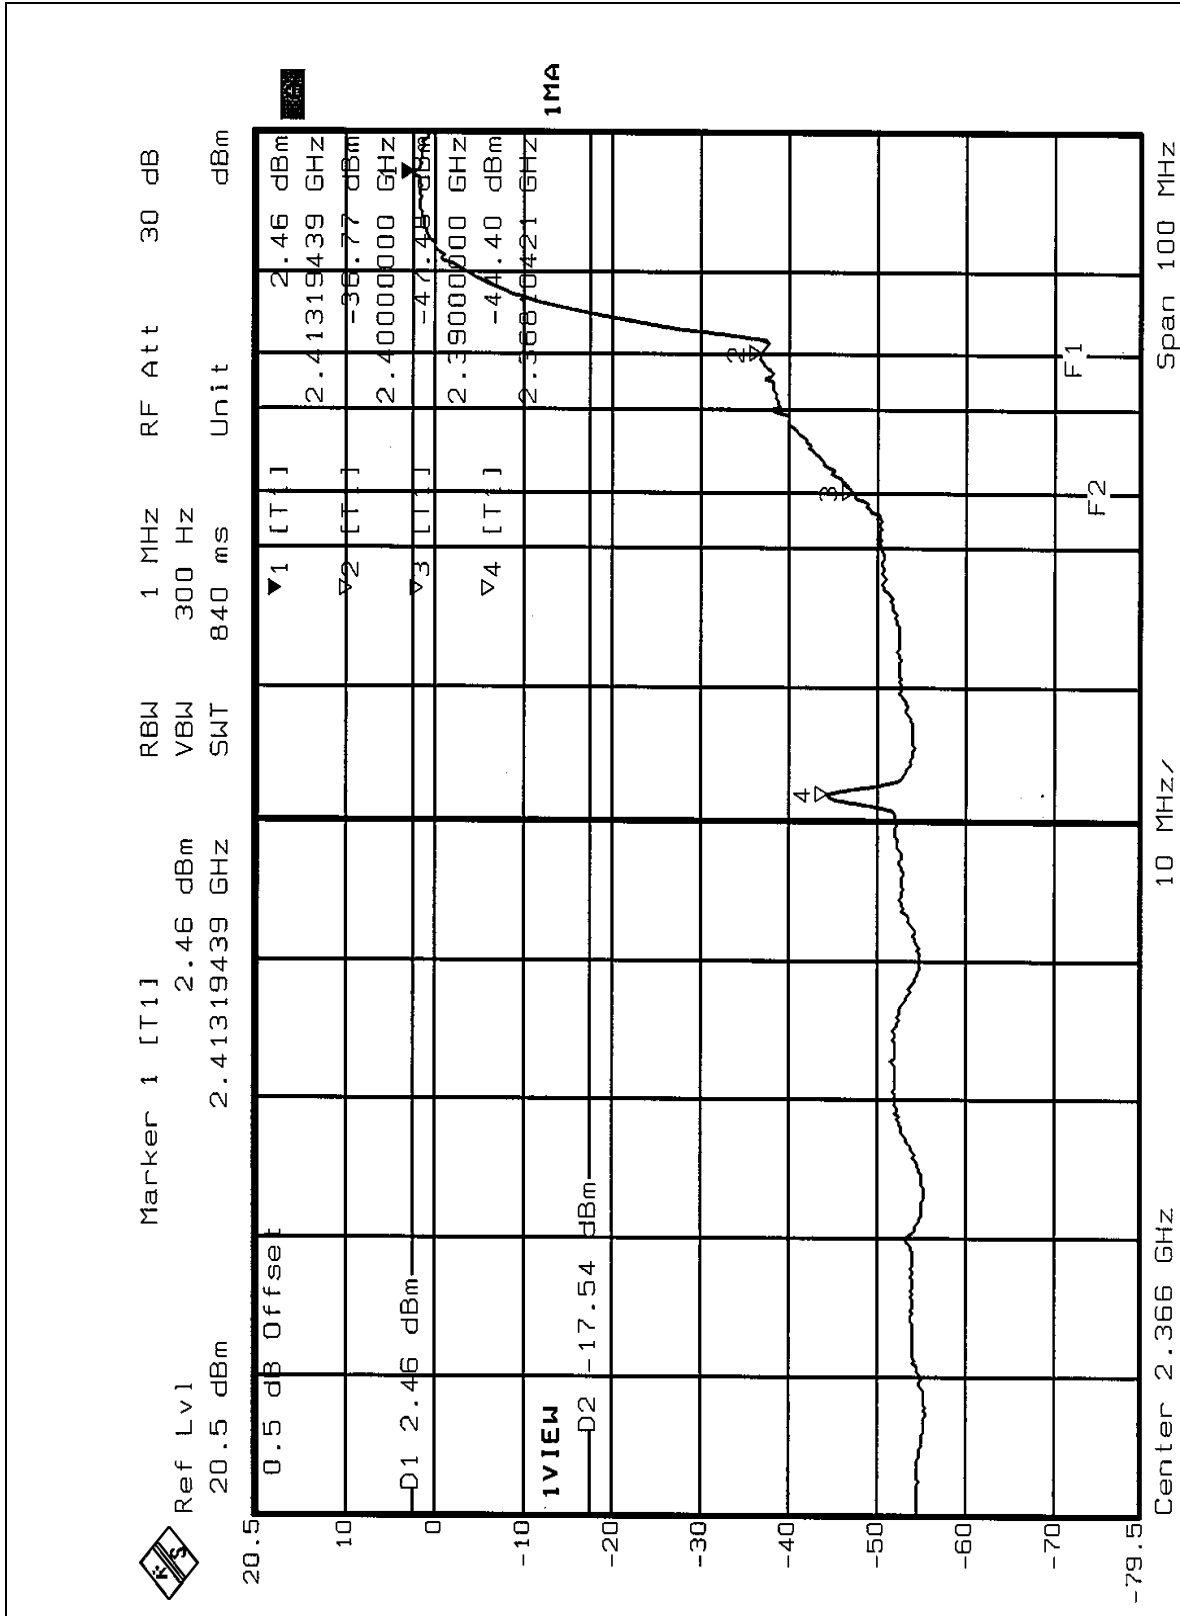

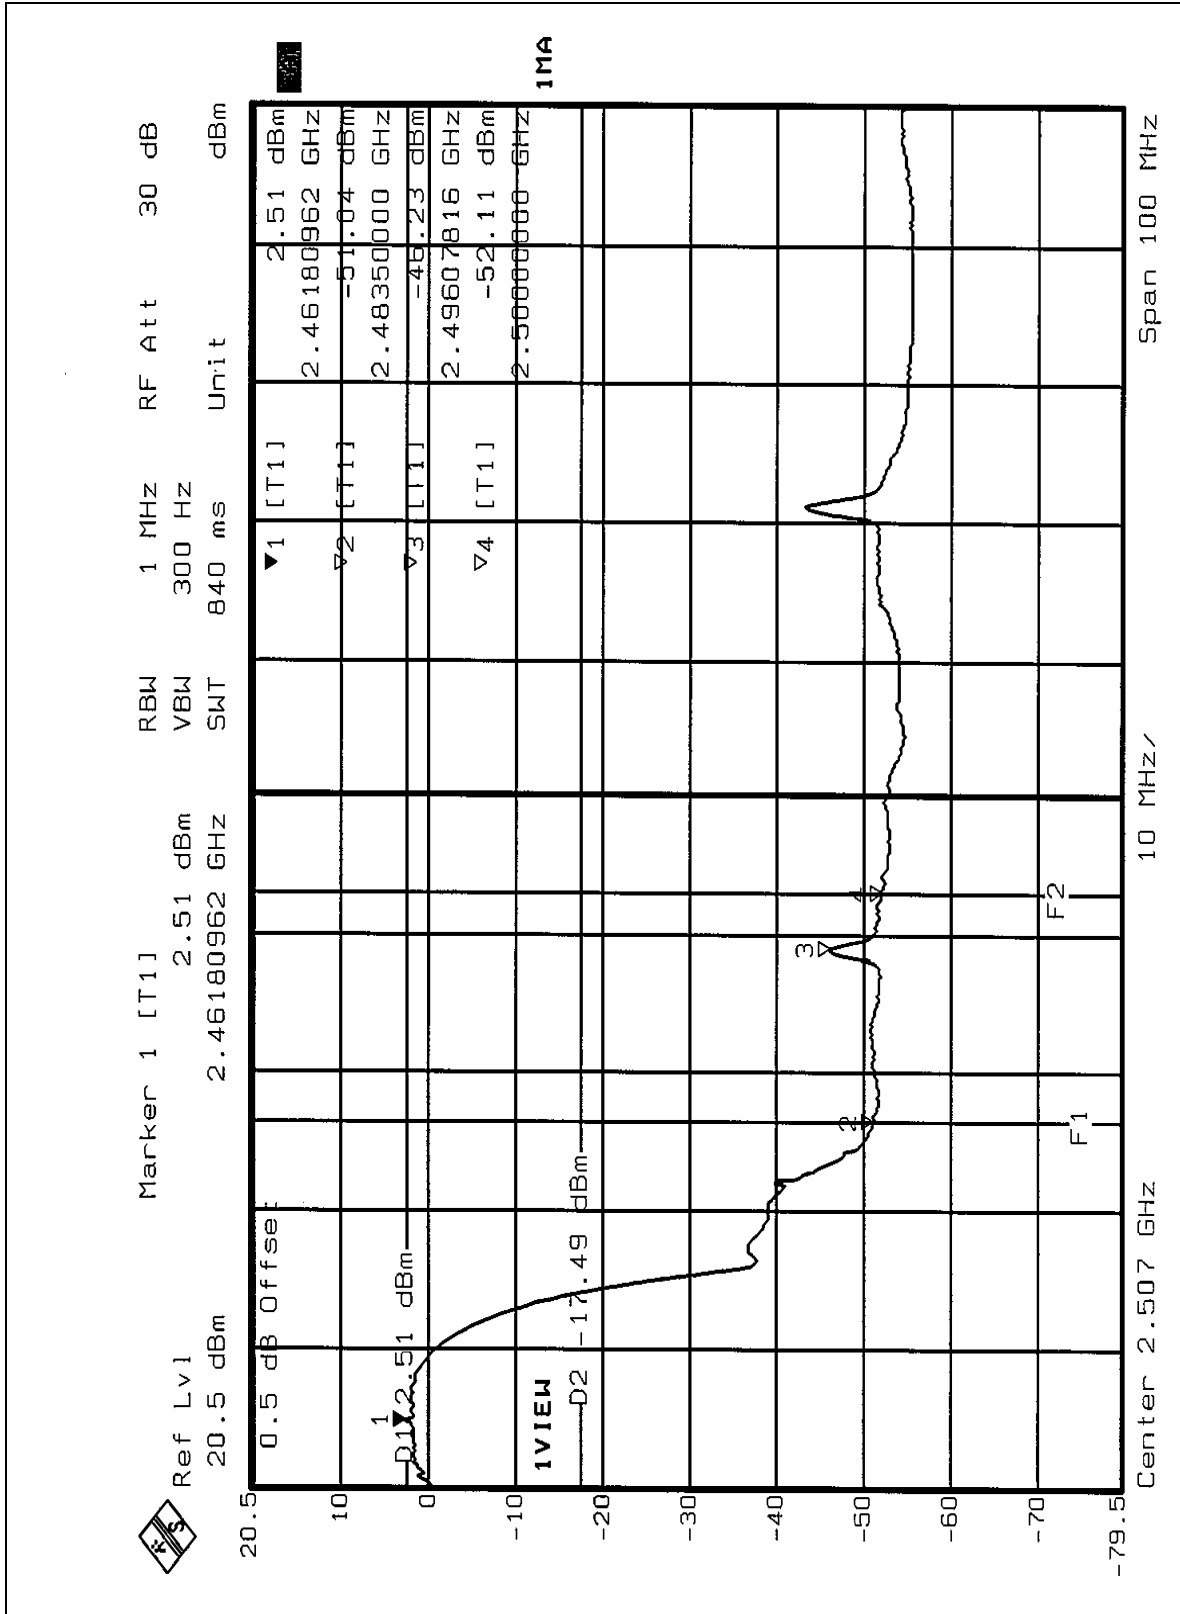




#### 4.6.7 TEST RESULTS – FOR OFDM


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

**NOTE:**

The band edge emission plot on the first page shows 42.66dB delta between carrier maximum power and local maximum emission in restrict band (2.3681GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 92.4dBuV/m, so the maximum field strength in restrict band is  $92.4 - 42.66 = 49.74$ dBuV/m which is under 54dBuV/m limit.

The band edge emission plot on the second page shows 42.22dB delta between carrier maximum power and local maximum emission in restrict band (2.4960GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 88.7dBuV/m, so the maximum field strength in restrict band is  $88.7 - 42.22 = 46.48$ dBuV/m which is under 54dBuV/m limit.

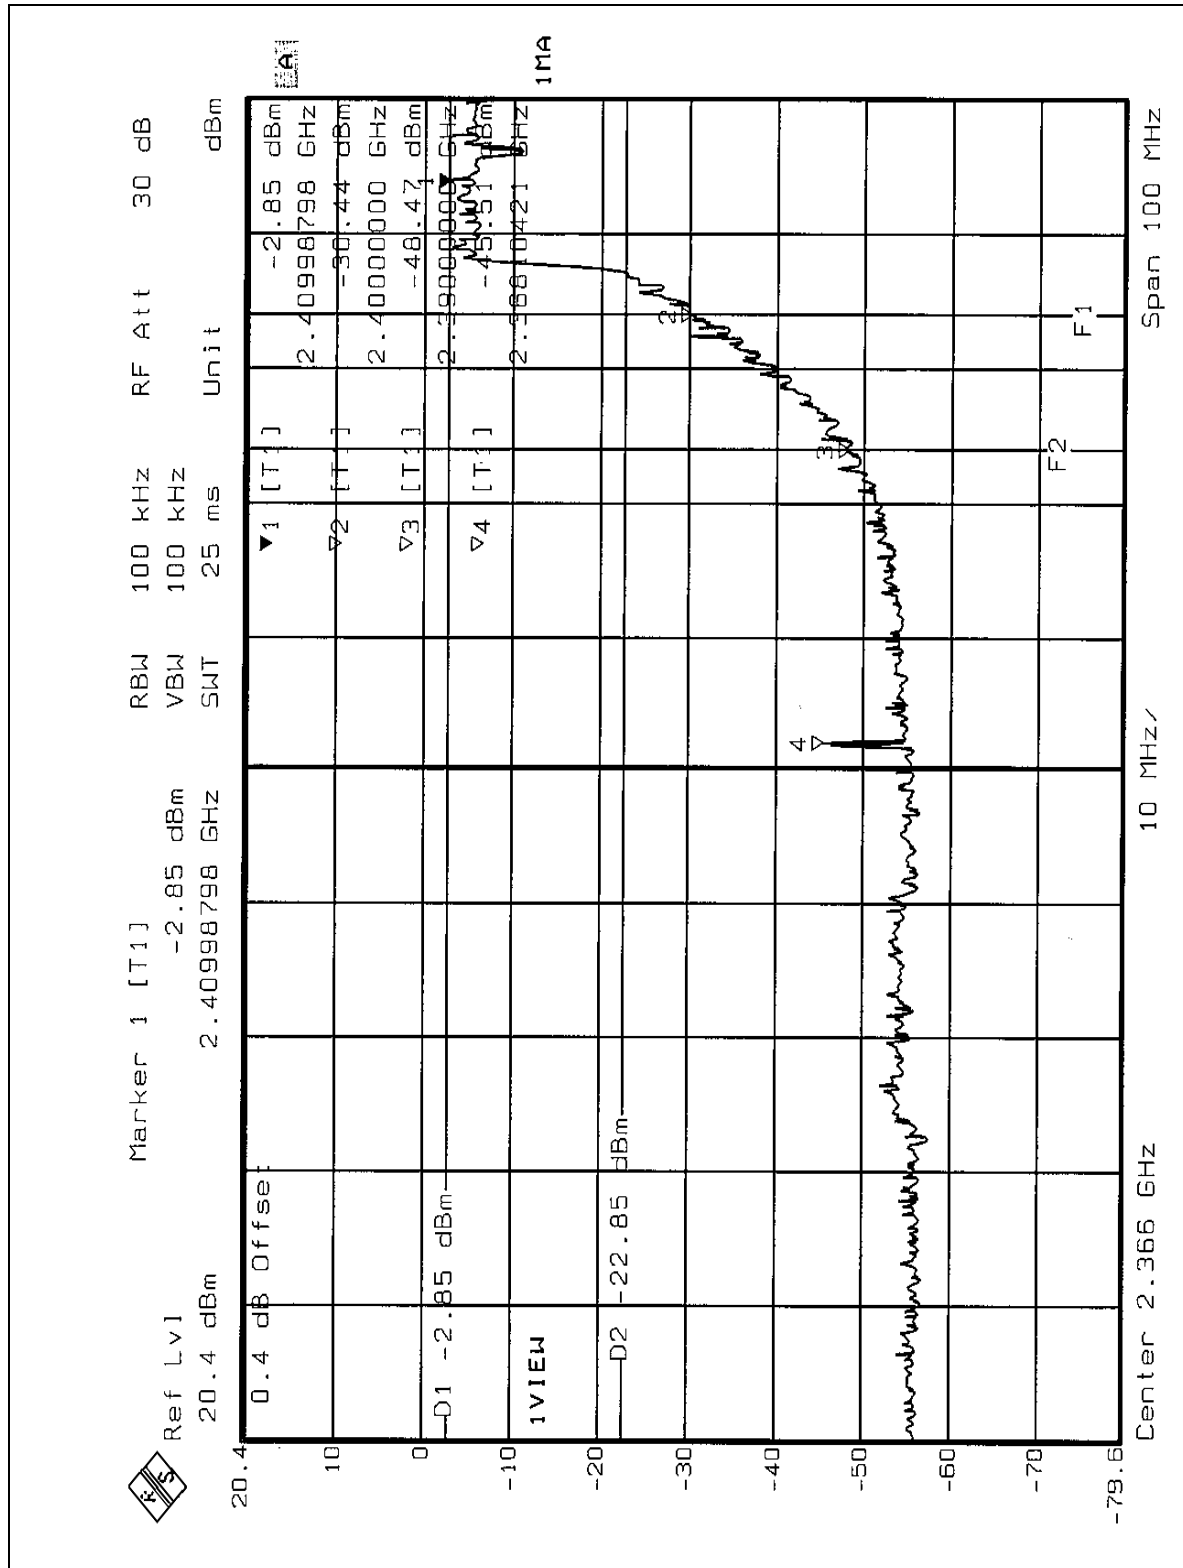

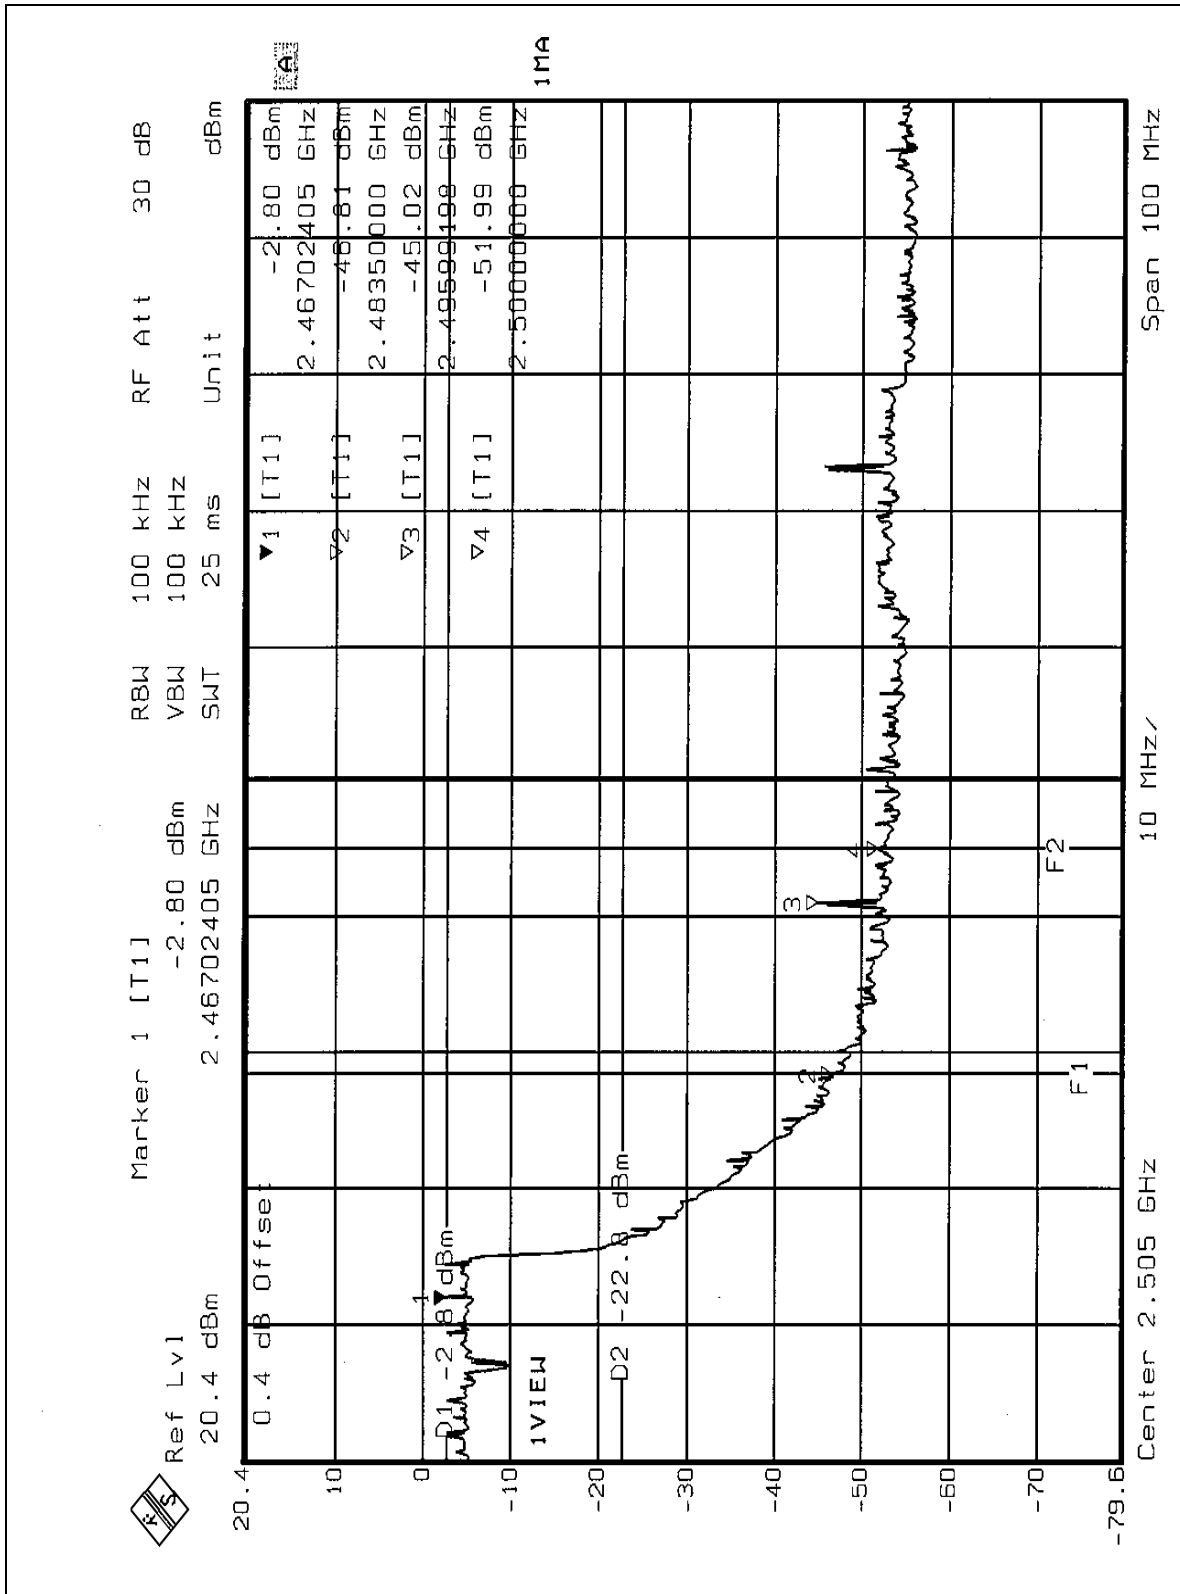



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Printed Patch Antenna without connector. The maximum Gain of the antenna is 1.5dBi



## 5. TEST TYPES AND RESULTS (FOR PART 802.11a)

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	847793/022	Mar. 10, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	July 23, 2003
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 30, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	July 23, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C05.01	July 19, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 23, 2004
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 23, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. “\*”: These equipment are used for conducted telecom port test only (if tested).
  3. The test was performed in ADT Shielded Room No. 5.
  4. The VCCI Site Registration No. is C-1093.






### 5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.5 TEST SETUP

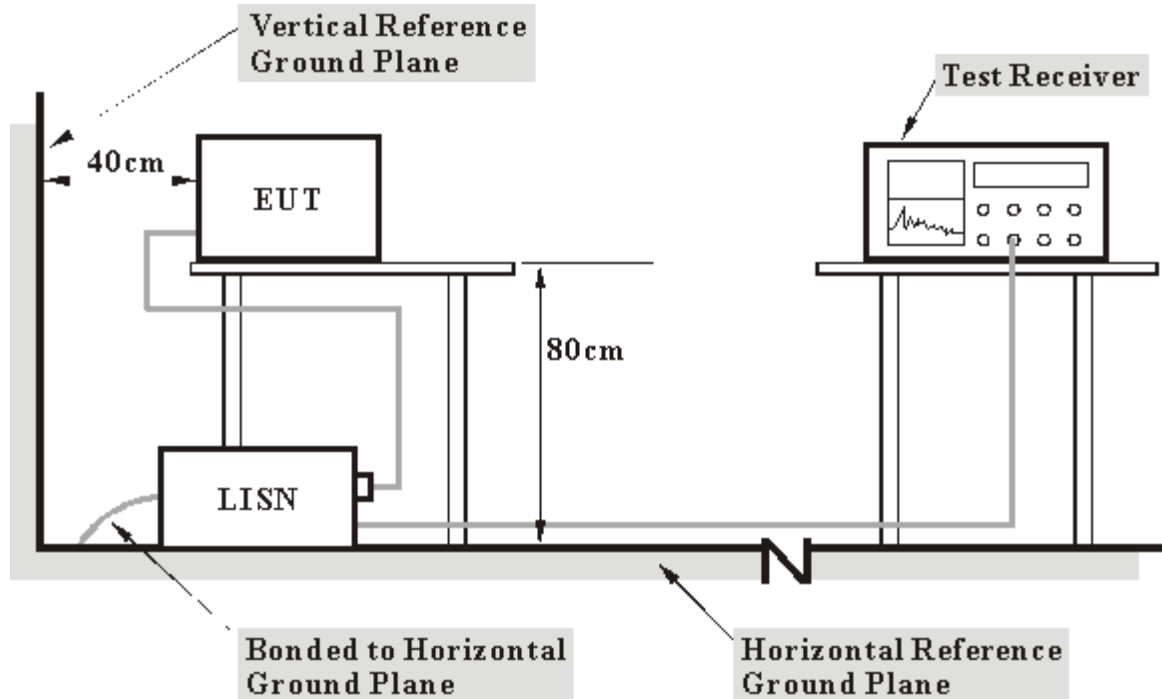

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6




5.1.7 TEST RESULTS

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	51.47	-	51.57	-	64.98	54.98	-13.41	-
2	0.228	0.10	44.42	-	44.52	-	62.52	52.52	-18.00	-
3	0.283	0.10	40.00	-	40.10	-	60.73	50.73	-20.63	-
4	0.396	0.10	34.50	-	34.60	-	57.93	47.93	-23.33	-
5	12.836	0.71	23.77	-	24.48	-	60.00	50.00	-35.52	-
6	19.891	1.09	27.51	-	28.60	-	60.00	50.00	-31.40	-

**NOTE:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

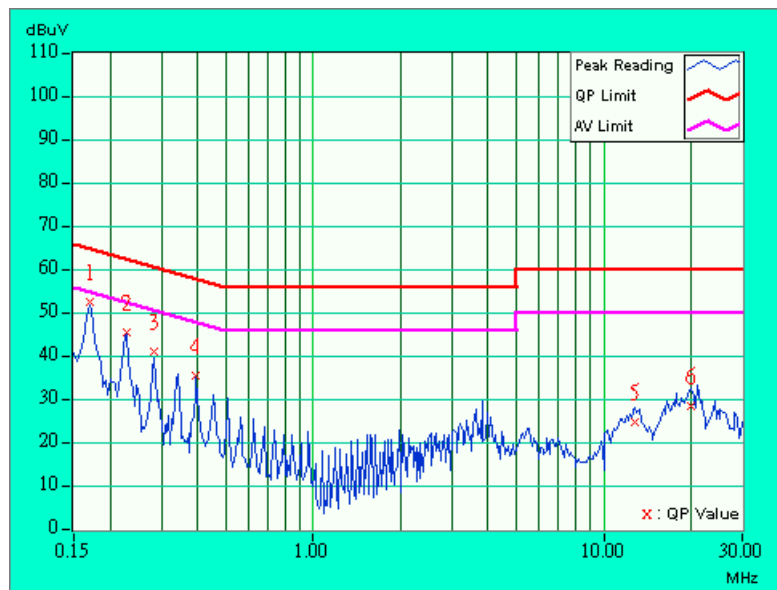




<b>EUT</b>	AirPro Dual-Band Wireless Carbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991 hPa	<b>TESTED BY:</b> Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.170	0.10	50.73	-	50.83	-	64.98	54.98	-14.15	-
2	0.228	0.10	43.18	-	43.28	-	62.52	52.52	-19.24	-
3	0.283	0.10	36.85	-	36.95	-	60.73	50.73	-23.78	-
4	3.848	0.29	31.21	-	31.50	-	56.00	46.00	-24.50	-
5	16.172	0.57	23.94	-	24.51	-	60.00	50.00	-35.49	-
6	20.719	0.79	25.29	-	26.08	-	60.00	50.00	-33.92	-

**NOTE:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

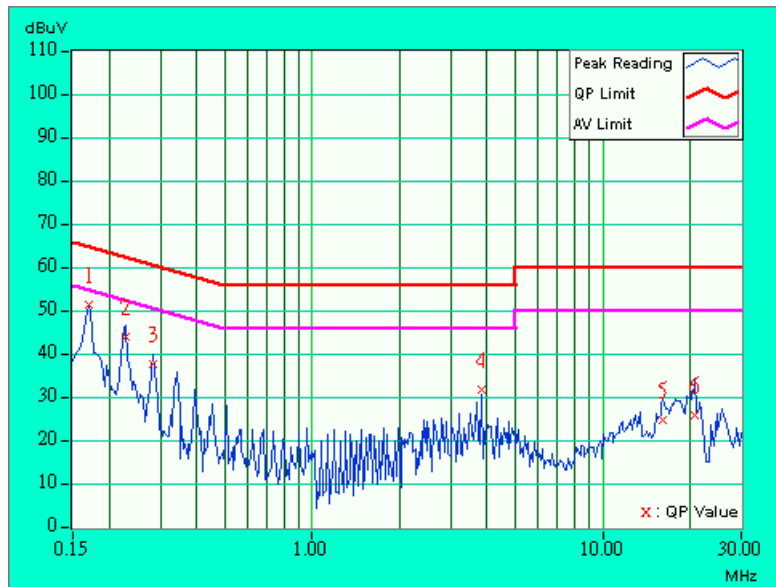



**5.2 RADIATED EMISSION MEASUREMENT**

**5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT**

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

<b>Frequencies (MHz)</b>	<b>Field strength (microvolts/meter)</b>	<b>Measurement distance (meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 5.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB $\mu$ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

**NOTE:**

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \quad \text{where P is the eirp (Watts)}$$



### 5.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
*Spectrum Analyzer	8593E	3926A04191	Mar. 28, 2003
*Test Receiver	ESI7	838496/016	Feb. 21, 2003
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Apr. 09, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated _V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jul. 11. 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 11. 2003

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "\*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



#### 5.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 5.2.5 DEVIATION FROM TEST STANDARD

No deviation



### 5.2.6 TEST SETUP

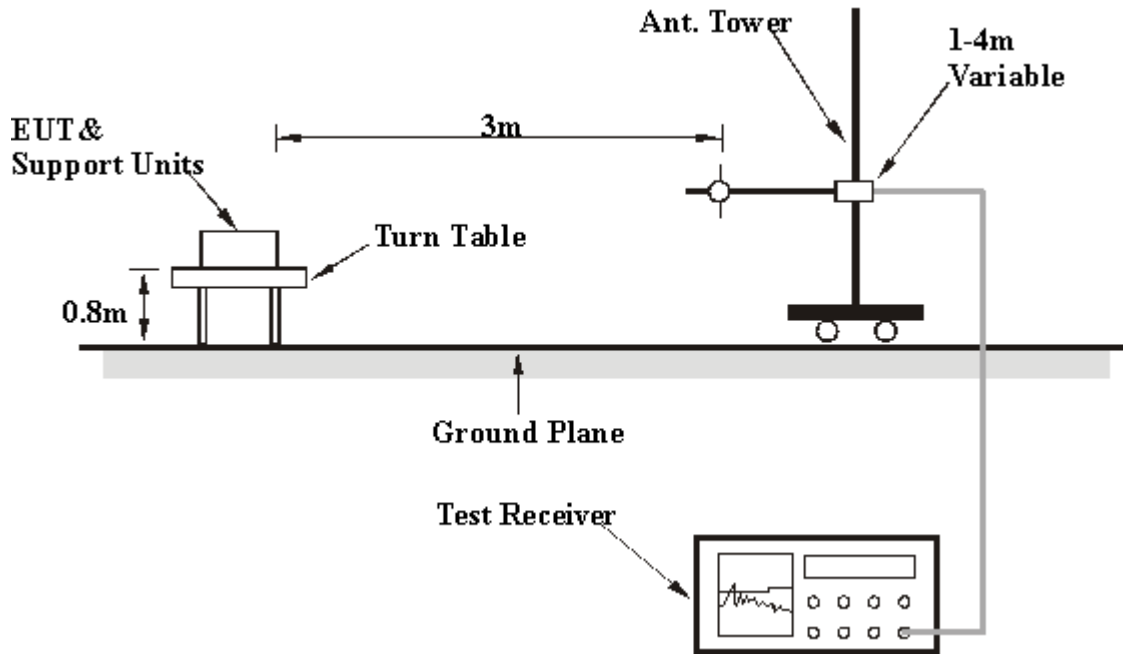

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.2.7 EUT OPERATING CONDITIONS

Same as 4.1.6



## 5.2.8 TEST RESULTS

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>FREQUENCY RANGE</b>	Below 1000MHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60%RH, 1050 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	192.02	28.0 QP	43.50	-15.50	1.20 H	33	17.20	10.80
2	288.03	32.4 QP	46.00	-13.60	1.58 H	114	15.80	16.60
3	384.03	34.1 QP	46.00	-11.90	1.24 H	3	15.40	18.70
4	448.03	27.4 QP	46.00	-18.60	1.18 H	51	7.70	19.70
5	767.98	28.8 QP	46.00	-17.20	1.56 H	308	4.40	24.40
6	863.98	29.5 QP	46.00	-16.50	1.10 H	179	4.40	25.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.02	23.3 QP	43.50	-20.20	1.25 V	144	12.40	10.80
2	288.02	28.9 QP	46.00	-17.10	1.17 V	6	12.20	16.60
3	384.02	28.3 QP	46.00	-17.70	1.15 V	359	9.60	18.70
4	448.02	26.8 QP	46.00	-19.20	1.33 V	79	7.10	19.70
5	512.02	29.9 QP	46.00	-16.10	1.09 V	295	8.80	21.20
6	576.02	29.7 QP	46.00	-16.30	1.25 V	87	7.80	21.90
7	640.02	28.5 QP	46.00	-17.50	1.55 V	3	5.70	22.80

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>CHANNEL</b>	1
<b>FREQUENCY RANGE</b>	Above 1000 MHz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60%RH, 1050 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz
<b>TESTED BY</b>	Gary Chang		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	58.1 PK	74.00	-15.90	1.12 H	74	20.40	37.70
1	#5150.00	49.0PK	54.00	-5.00	1.12 H	74	20.40	37.70
2	*5180.00	102.7 PK			1.35 H	65	65.00	37.70
2	*5180.00	94.8 AV			1.35 H	65	57.10	37.70
3	10360.00	45.2 PK	68.30	-23.10	1.12 H	38	0.70	44.50

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	58.1 PK	74.00	-15.90	1.52 V	62	20.40	37.70
1	#5150.00	49.0 AV	54.00	-5.00	1.52 V	62	11.30	37.70
2	*5180.00	102.1 PK			1.52 V	62	64.40	37.70
2	*5180.00	94.2 AV			1.52 V	62	56.50	37.70
3	10360.00	46.2 PK	68.30	-22.10	1.30 V	57	1.70	44.50

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>CHANNEL</b>	4
<b>FREQUENCY RANGE</b>	Above 1000 MHz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60%RH, 1050 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz
<b>TESTED BY</b>	Gary Chang		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	100.3 PK			1.45 H	251	62.60	37.70
1	*5240.00	94.3 AV			1.45 H	251	56.70	37.70
2	10480.00	55.0 PK	68.30	-13.30	1.20 H	33	10.00	45.00

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	104.9 PK			1.54 V	108	67.20	37.70
1	*5240.00	96.9 AV			1.54 V	108	59.20	37.70
2	10480.00	56.0 PK	68.30	-12.30	1.14 V	55	11.00	45.00

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>CHANNEL</b>	5
<b>FREQUENCY RANGE</b>	Above 1000 MHz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60%RH, 1050 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz
<b>TESTED BY</b>	Gary Chang		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	104.7 PK			1.66 H	226	67.00	37.70
1	*5260.00	95.8 AV			1.66 H	226	58.10	37.70
2	10520.00	55.8 PK	68.30	-12.50	1.12 H	24	10.70	45.10

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5260.00	102.0 PK	74.00			67	64.30	37.70
1	*5260.00	94.8 AV	54.00			67	57.10	37.70
2	10520.00	56.0 PK	68.30	-12.30	1.14 V	82	10.90	45.10

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>CHANNEL</b>	8
<b>FREQUENCY RANGE</b>	Above 1000 MHz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60%RH, 1050 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz
<b>TESTED BY</b>	Gary Chang		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	103.0 PK			1.18 H	225	65.30	37.70
1	*5320.00	97.1 AV			1.18 H	225	59.40	37.70
2	#5350.00	55.7 PK	74.00	-18.30	1.18 H	225	18.00	37.70
2	#5350.00	50.1 AV	54.00	-3.90	1.18 H	225	12.40	37.70
3	#10640.00	55.6 PK	74.00	-18.40	1.35 H	54	10.40	45.20
3	#10640.00	45.2 AV	54.00	-8.80	1.35 H	54	0.00	45.20

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.2 PK			1.12 V	74	69.50	37.70
1	*5320.00	99.6 AV			1.12 V	74	61.90	37.70
2	#5350.00	56.7 PK	74.00	-17.30	1.12 V	74	19.00	37.70
2	#5350.00	51.8 AV	54.00	-2.20	1.12 V	74	14.10	37.70
3	#10640.00	55.6 PK	74.00	-18.40	1.75 V	32	10.40	45.20
3	#10640.00	44.2 AV	54.00	-9.80	1.75 V	32	-1.10	45.20

#### REMARKS:

- Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
- Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value.
- "\*": Fundamental frequency
- "#": The radiated frequency falling in the restricted band.



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>CHANNEL</b>	9
<b>FREQUENCY RANGE</b>	Above 1000 MHz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60%RH, 1050 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz
<b>TESTED BY</b>	Gary Chang		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5715.00	64.9 PK	68.30	-3.40	1.63 H	239	27.00	37.90
2	5725.00	76.9 PK	78.30	-1.40	1.63 H	239	39.00	37.90
3	*5745.00	107.3 PK			1.63 H	239	69.40	37.90
3	*5745.00	98.6 AV			1.63 H	239	60.70	37.90
4	#11487.00	55.8 PK	74.00	-18.20	1.25 H	74	10.30	45.50
4	#11487.00	44.5 AV	54.00	-9.50	1.25 H	74	-1.00	45.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5725.00	73.9 PK	78.30	-4.40	1.67 V	101	36.00	37.90
2	5725.00	64.3 PK	68.30	-4.00	1.67 V	101	26.40	37.90
3	*5745.00	103.6 PK			1.67 V	101	65.70	37.90
3	*5745.00	95.3 AV			1.67 V	101	57.40	37.90
4	#11487.00	55.5 PK	74.00	-18.50	1.36 V	5	10.00	45.50
4	#11487.00	45.3 AV	54.00	-8.70	1.36 V	5	-0.20	45.50

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency
6. "# " : The radiated frequency falling in the restricted band.



<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
		<b>CHANNEL</b>	12
<b>FREQUENCY RANGE</b>	Above 1000 MHz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20 deg. C, 60%RH, 1050 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60Hz
<b>TESTED BY</b>	Gary Chang		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5805.00	105.7 PK			1.14 H	239	67.70	38.00
1	*5805.00	99.7 AV			1.14 H	239	61.70	38.00
2	5825.00	75.8 PK	78.30	-2.50	1.14 H	239	37.80	38.00
3	5835.00	65.5 PK	68.30	-2.80	1.14 H	239	27.50	38.00
4	#11617.00	55.5 PK	74.00	-18.50	1.21 H	28	10.00	45.50

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5805.00	103.6 PK			1.44 V	111	65.60	38.00
1	*5805.00	96.5 AV			1.44 V	111	58.50	38.00
2	5825.00	73.0 PK	78.30	-5.30	1.44 V	111	35.00	38.00
3	5835.00	64.8 PK	68.30	-3.50	1.44 V	111	26.80	38.00
4	#11617.00	55.3 PK	74.00	-18.70	2.17 V	36	9.80	45.50
4	#11617.00	45.5 AV	54.00	-8.50	2.17 V	36	0.00	45.50

#### REMARKS:

- Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
- Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value.
- "\*": Fundamental frequency
- "#": The radiated frequency falling in the restricted band.
- 1.





### 5.3 PEAK TRANSMIT POWER MEASUREMENT

#### 5.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35 GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825 GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

**Note:** Where B is the 26dB emission bandwidth in MHz.

#### 5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 5.3.3 TEST PROCEDURE

2. The transmitter output was connected to the spectrum analyzer.
3. Set span to encompass the entire emission bandwidth of the signal.
4. Set RBW to 1MHz, VBW to 300kHz.
5. Using the spectrum analyzer's channel power measurement function to measure the output power.

### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.3.5 TEST SETUP



### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



## 5.3.7 TEST RESULTS


<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>ENVIRONMENTAL CONDITIONS</b>	21deg. C, 68%RH, 991 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Ansen Lei		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER OUTPUT (dBm)</b>	<b>PEAK POWER LIMIT (dBm)</b>	<b>26dBc Occupied Bandwidth (MHz)</b>	<b>PASS/FAIL</b>
1	5180	15.57	17.00	27.41	PASS
4	5240	15.54	17.00	27.17	PASS
5	5260	16.83	24.00	26.45	PASS
8	5320	16.77	24.00	26.05	PASS
9	5745	14.97	30.00	29.86	PASS
12	5805	16.21	30.00	29.26	PASS

**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.




CHANNEL 1

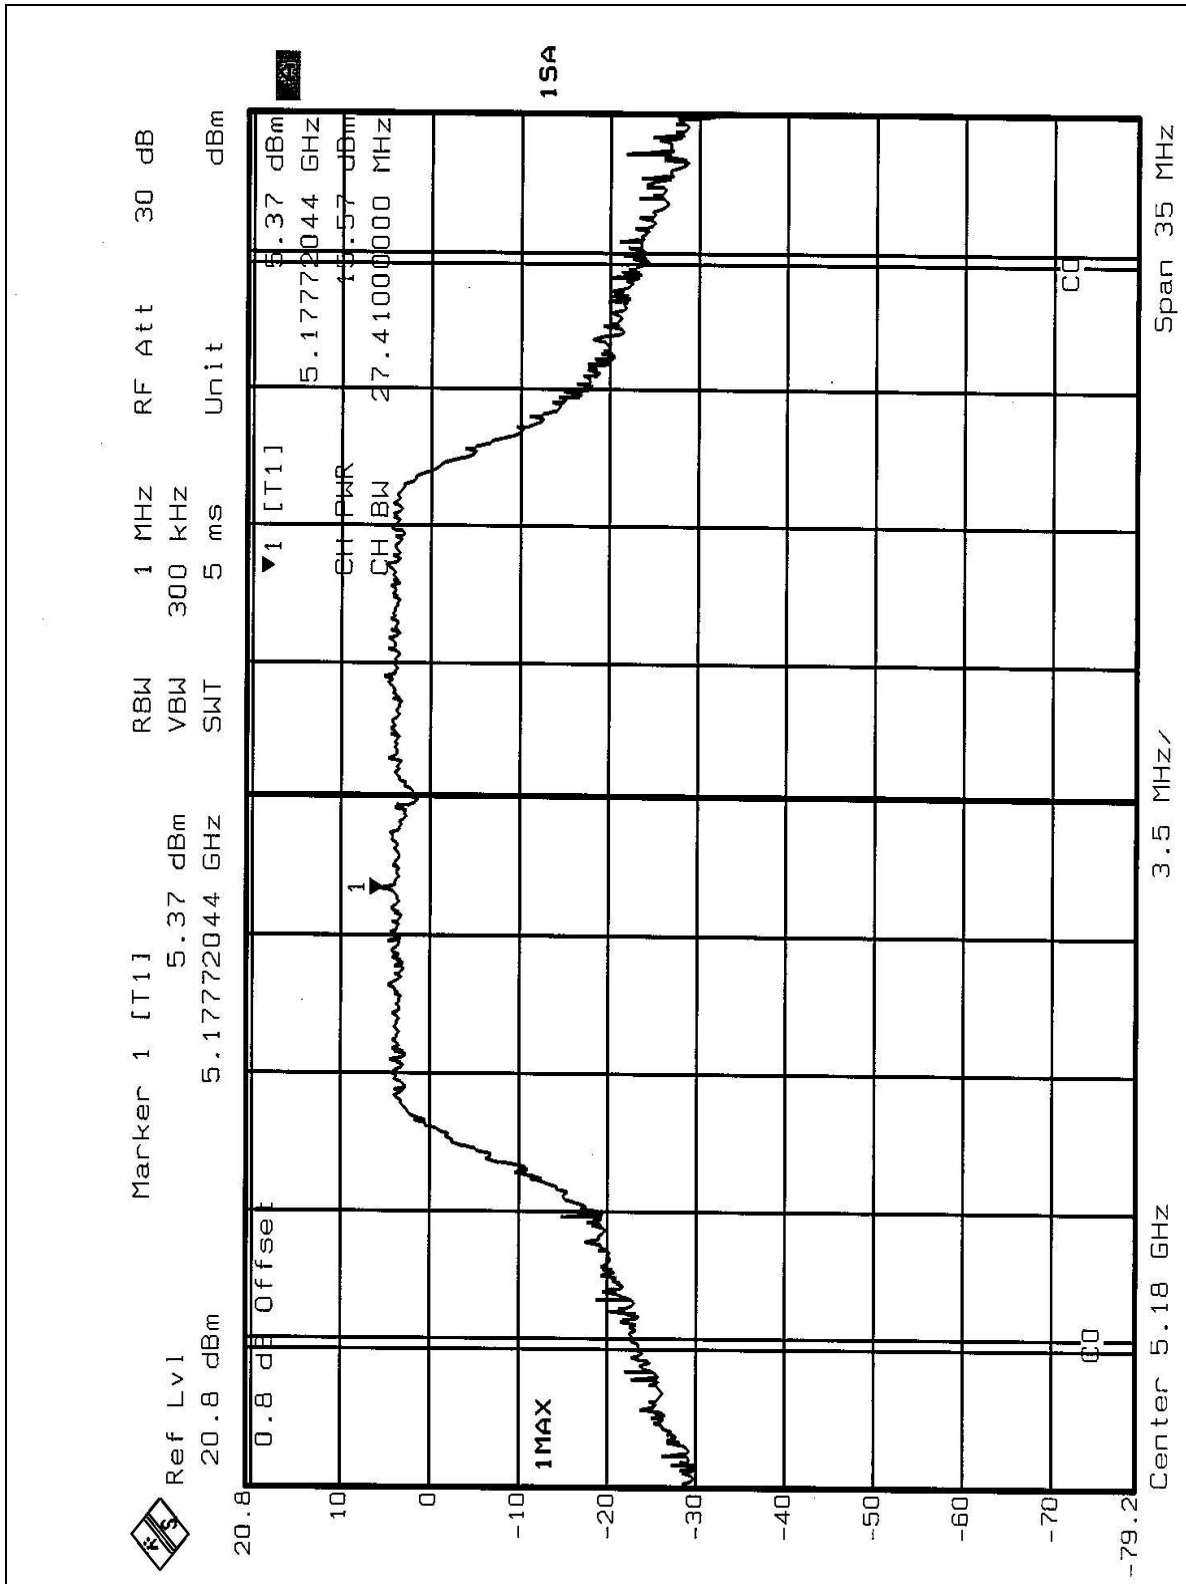




CHANNEL 4

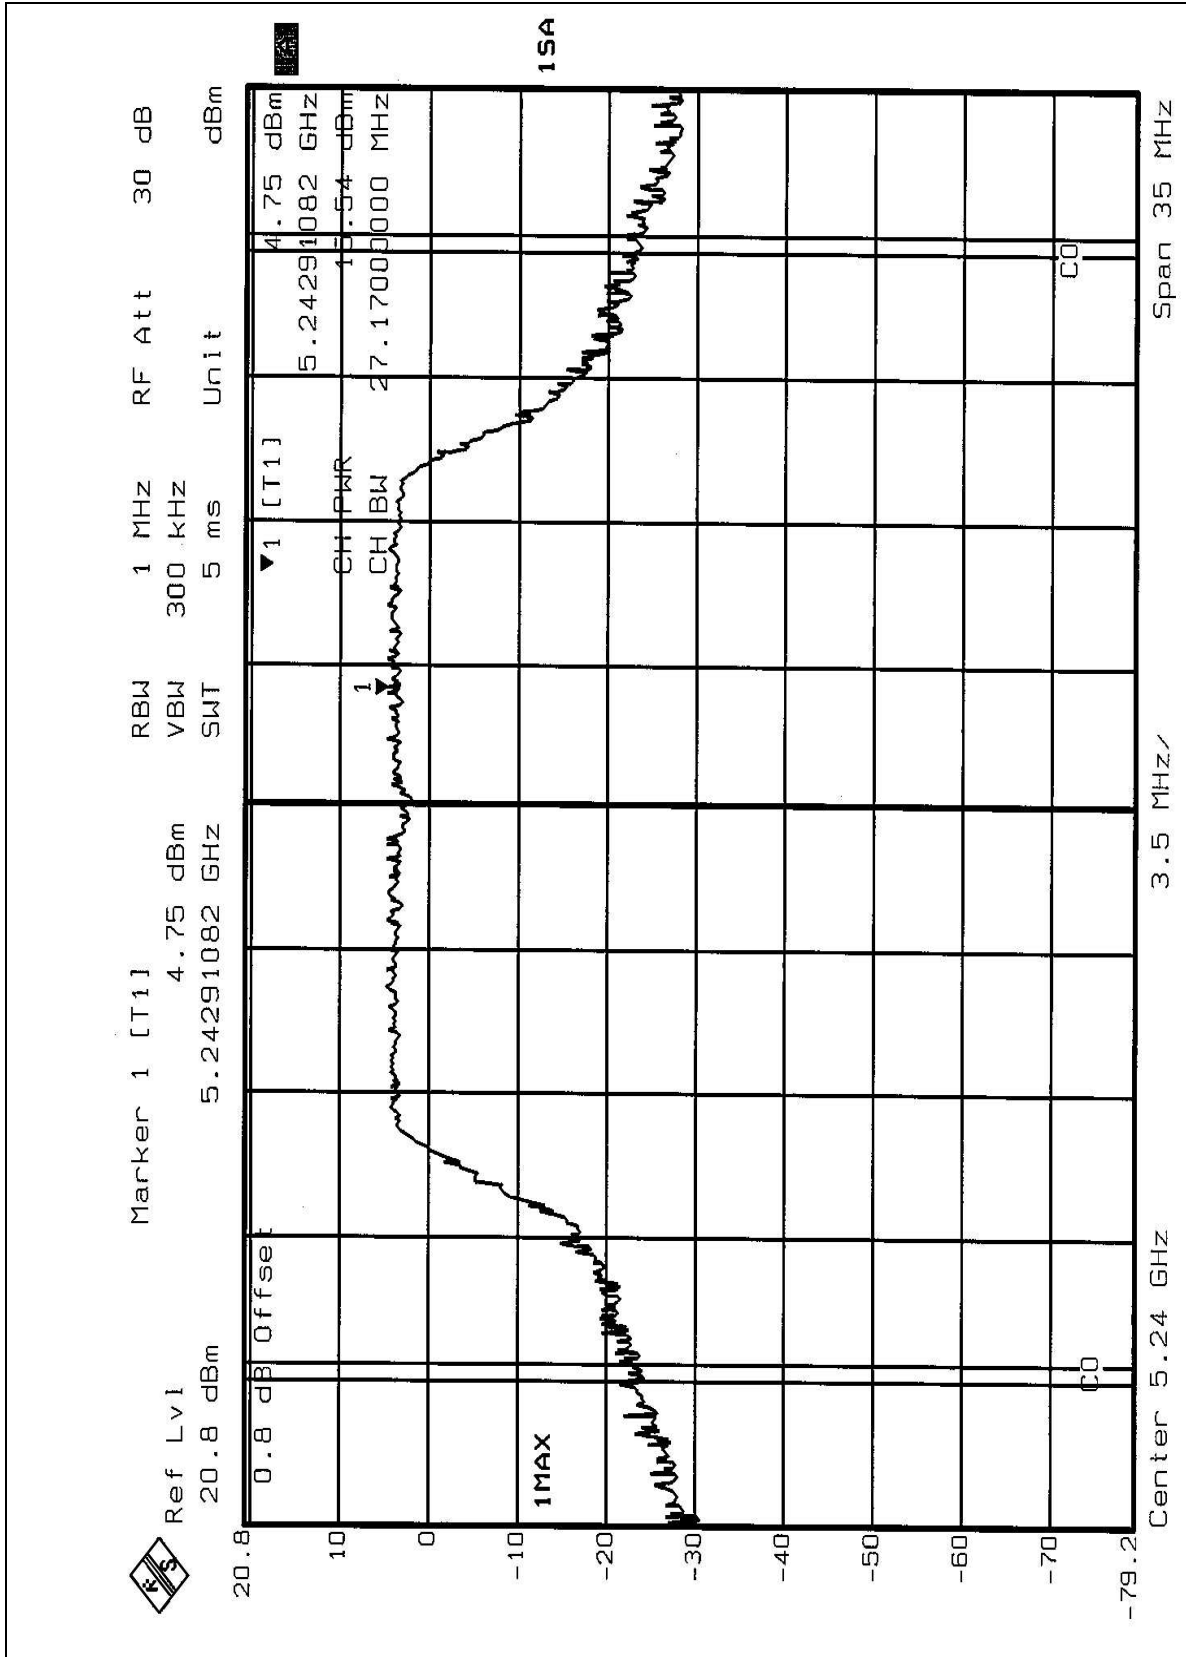




CHANNEL 5

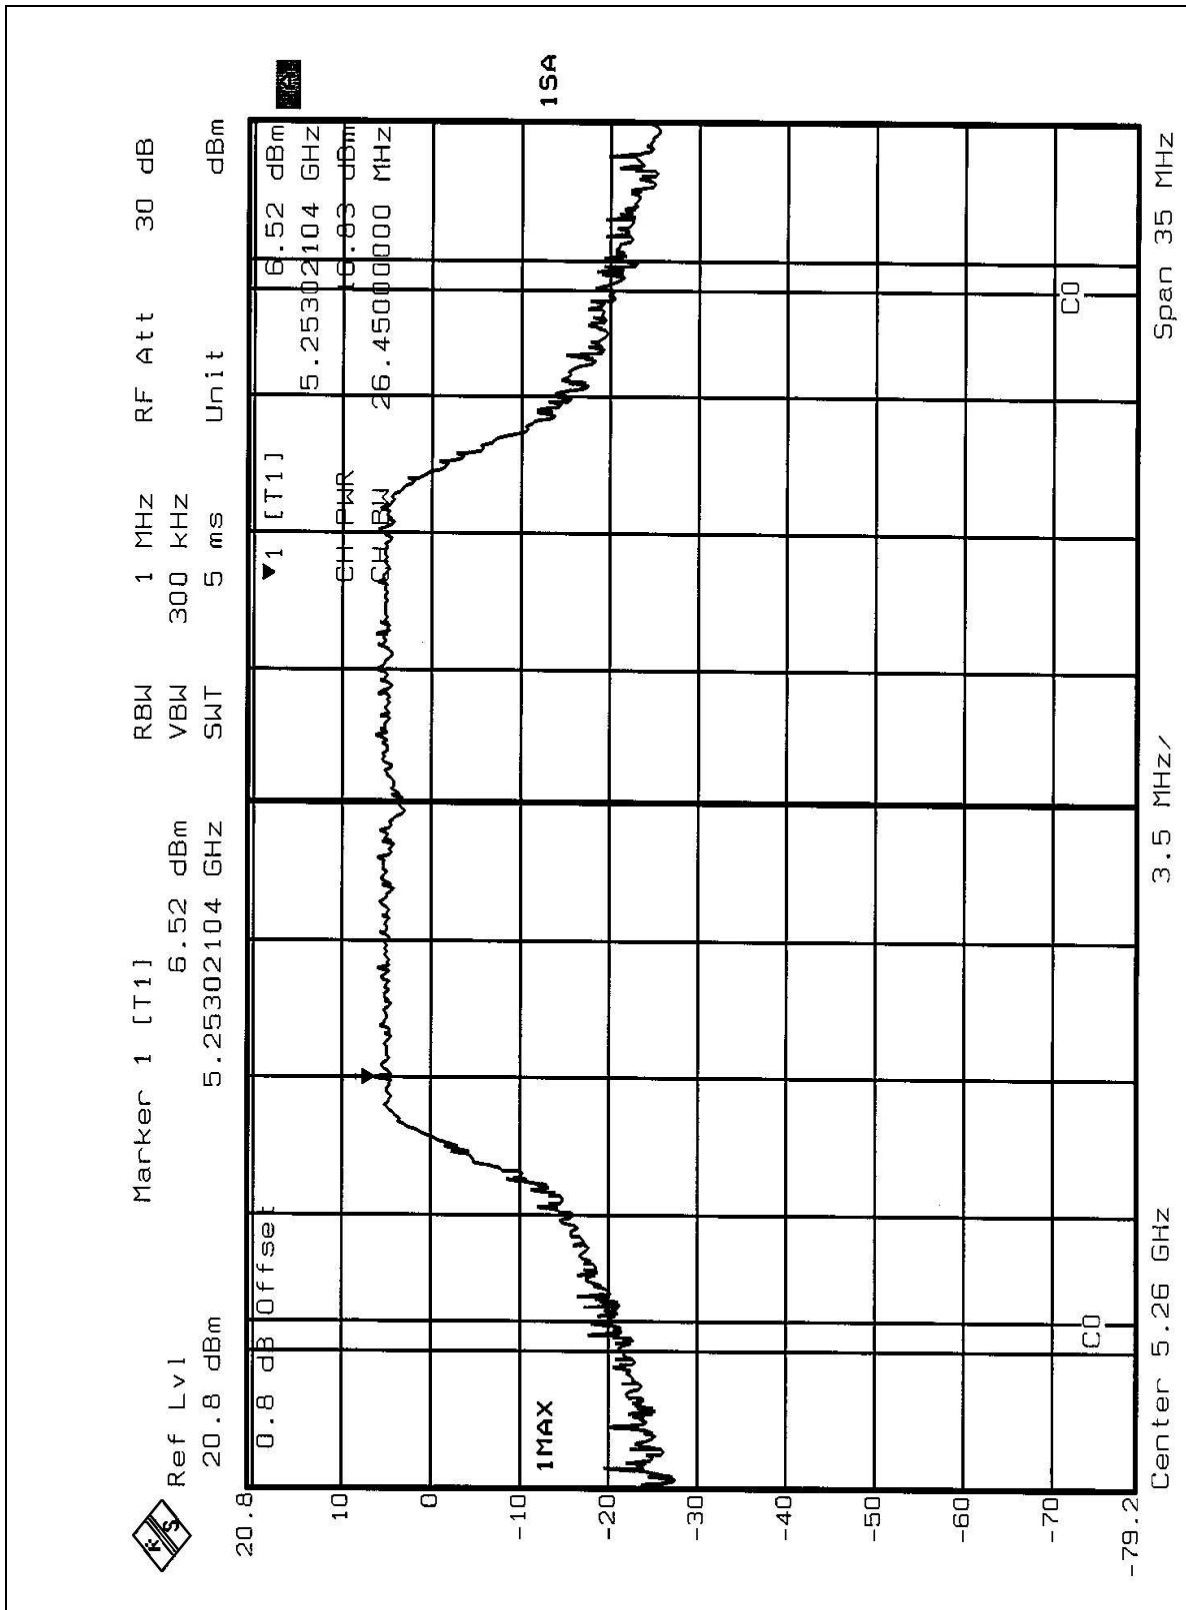




CHANNEL8

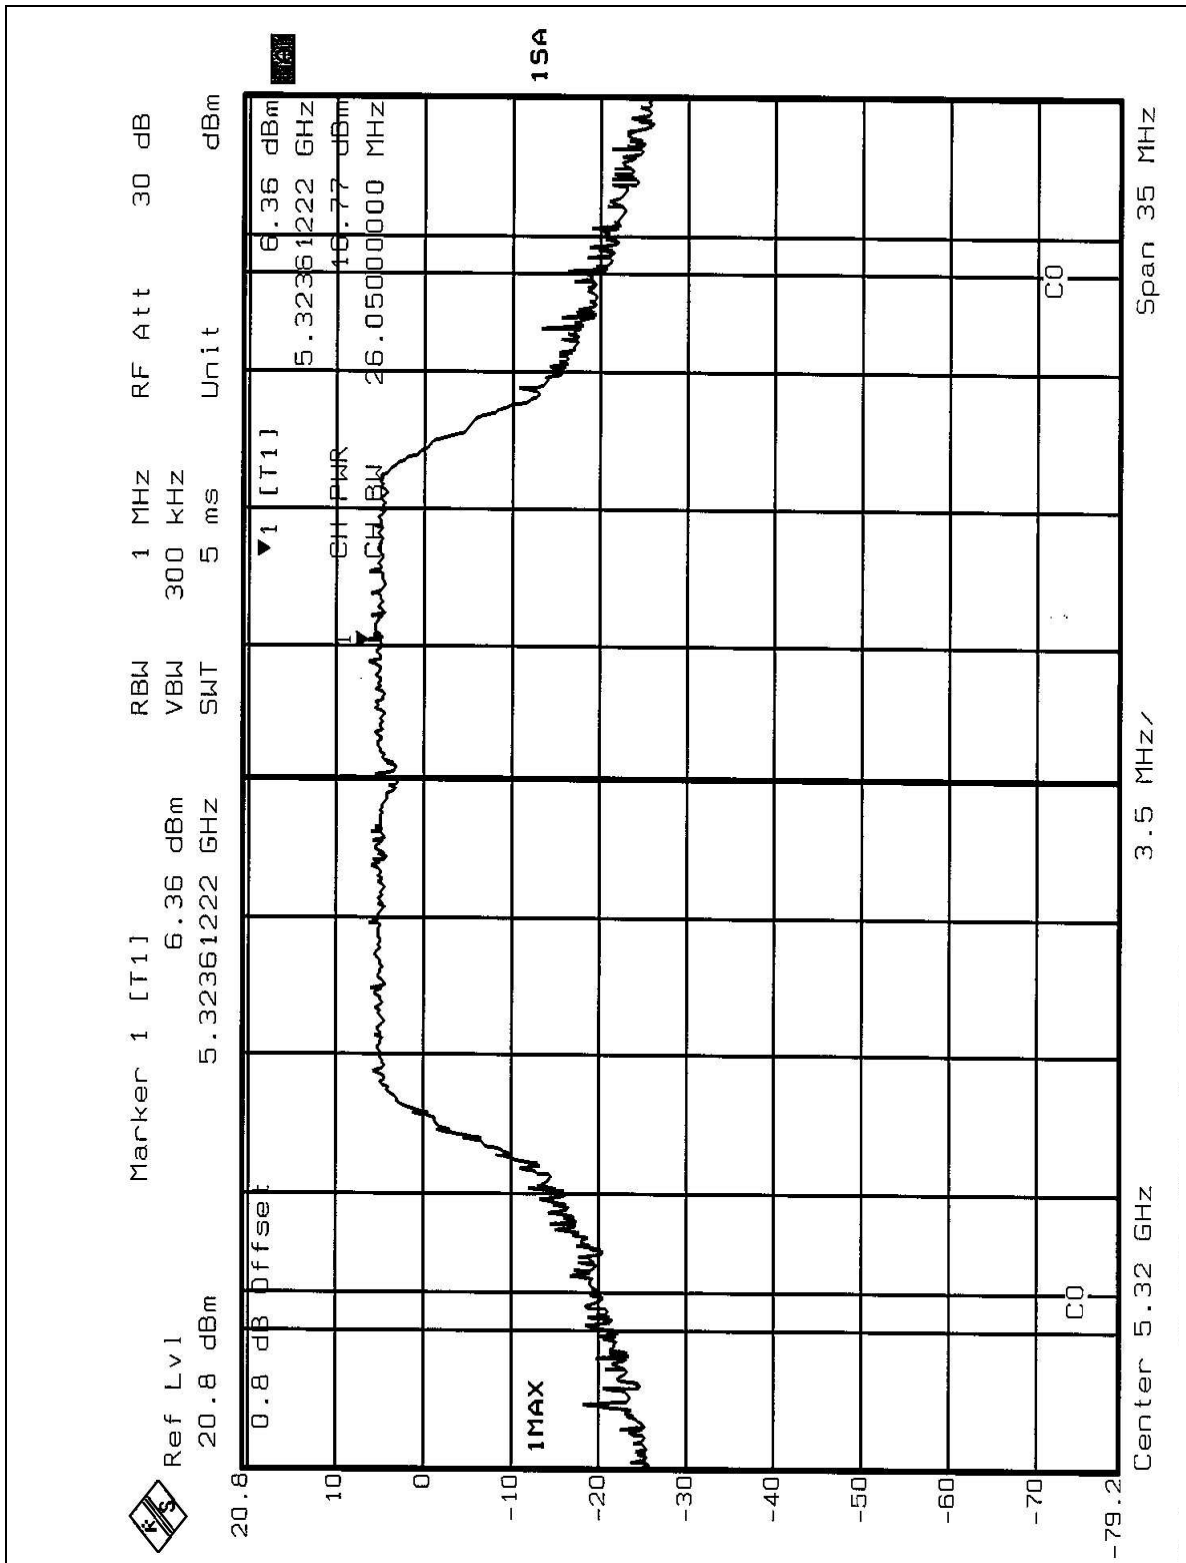




CHANNEL9

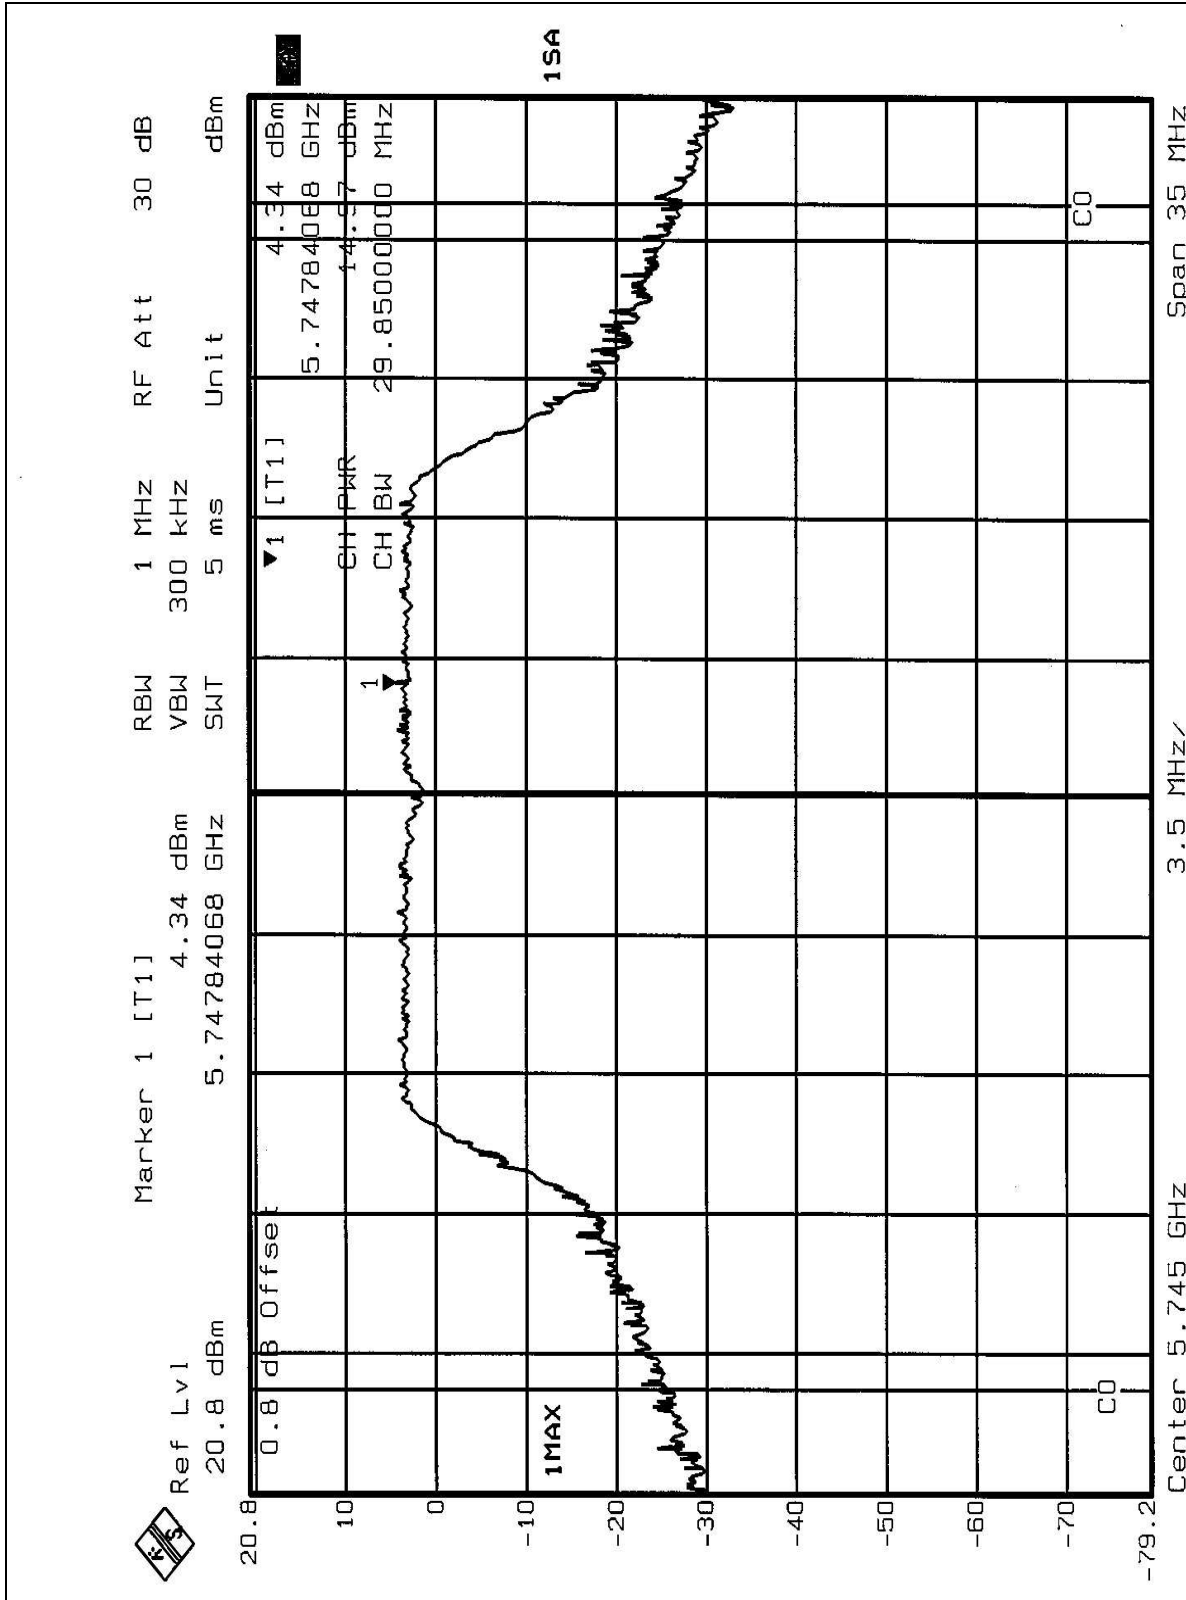






CHANNEL 12

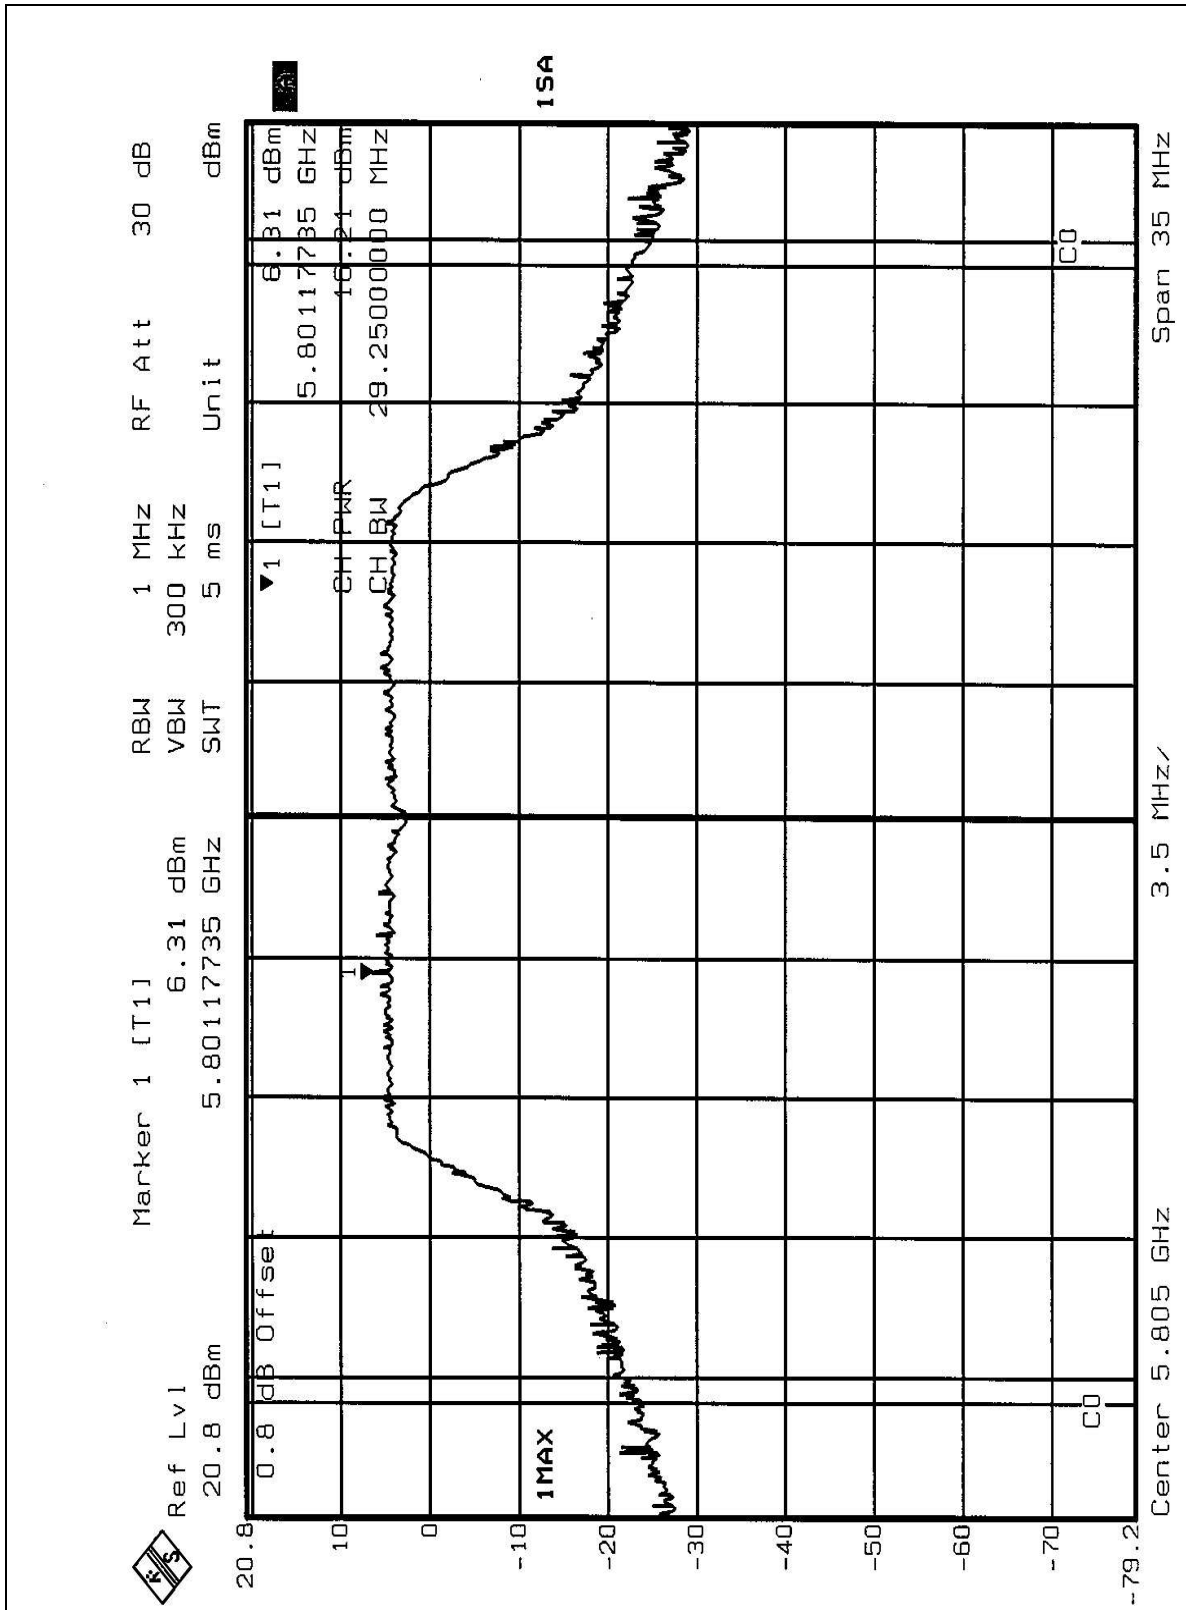




CHANNEL 1

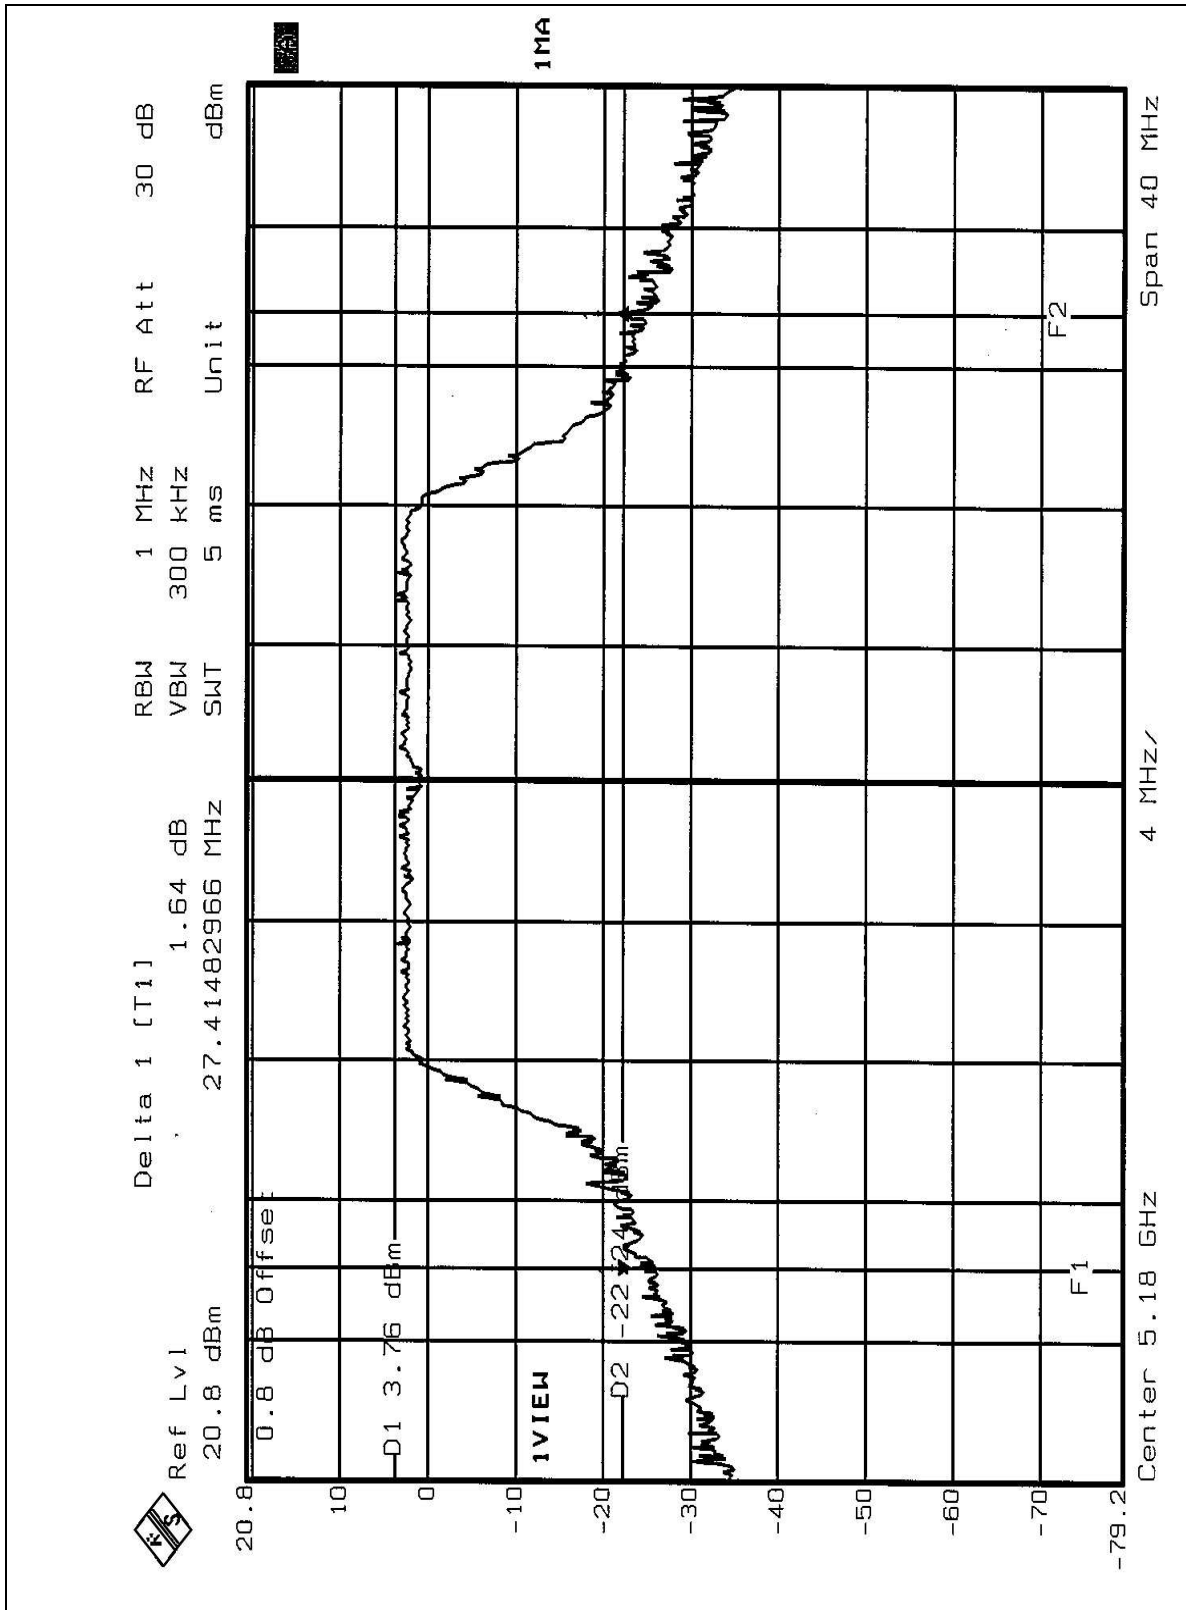




CHANNEL 4

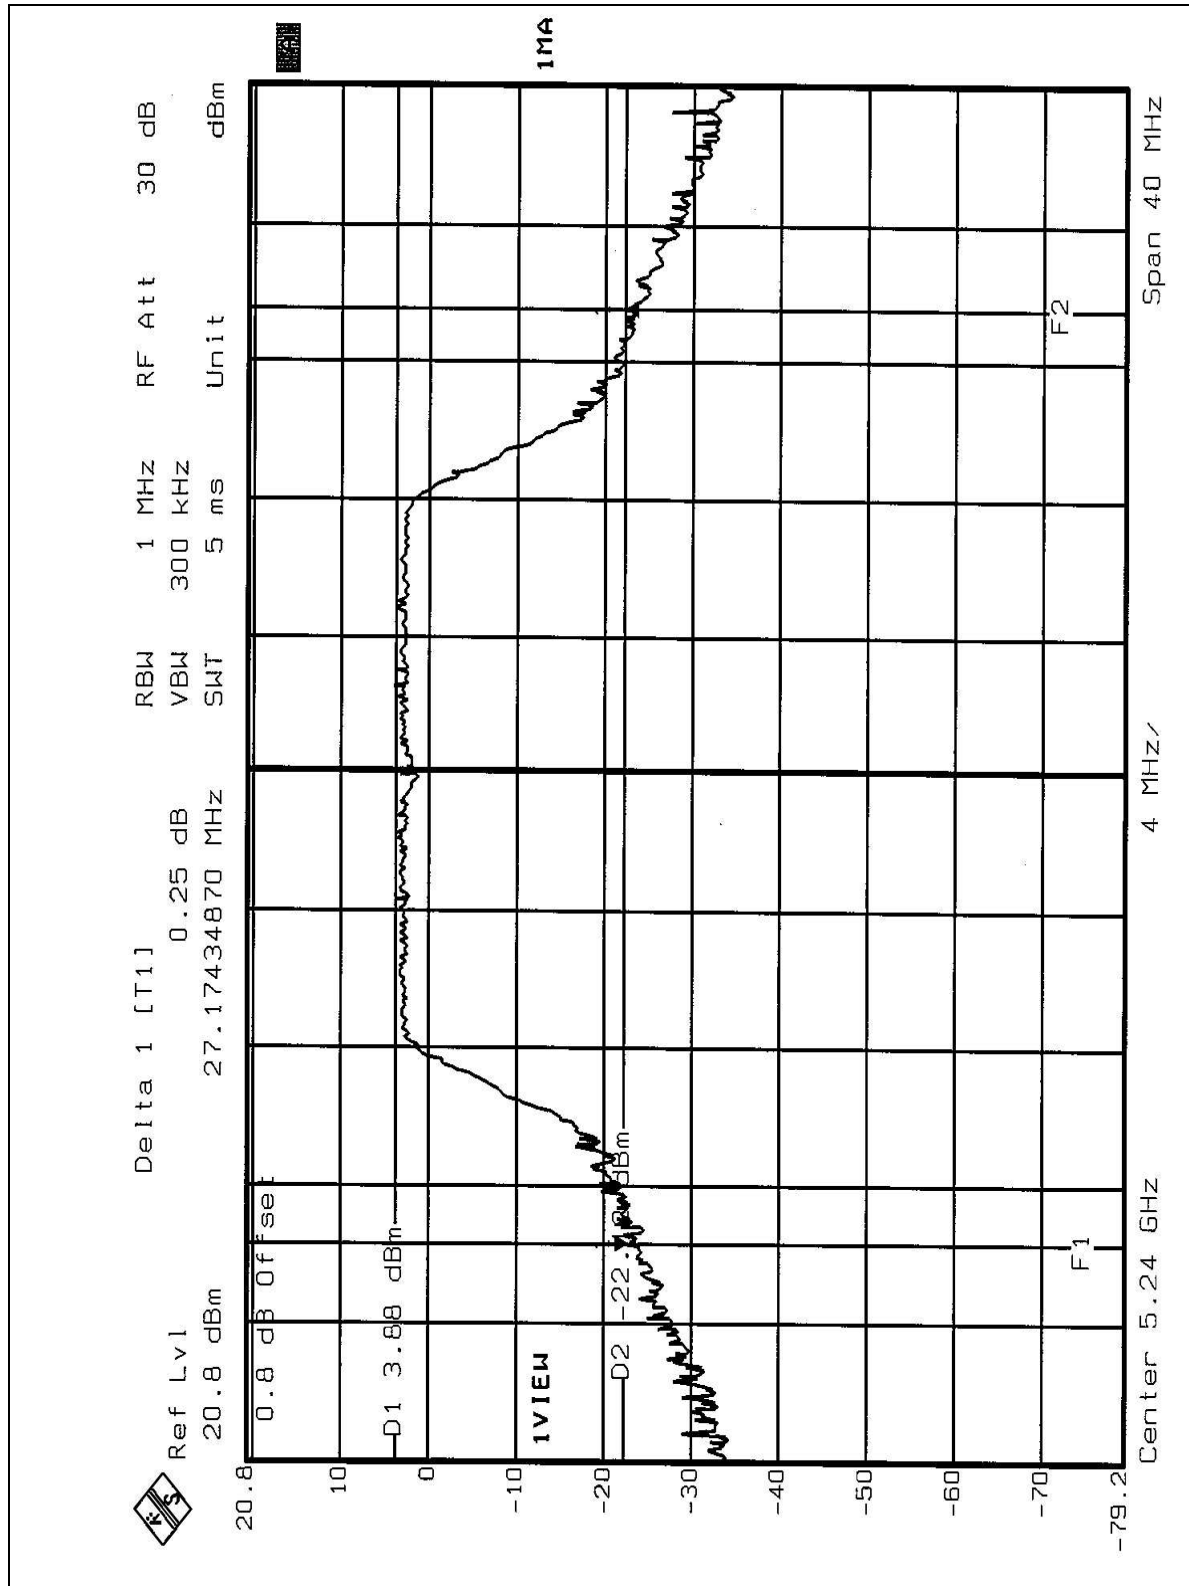




CHANNEL 5

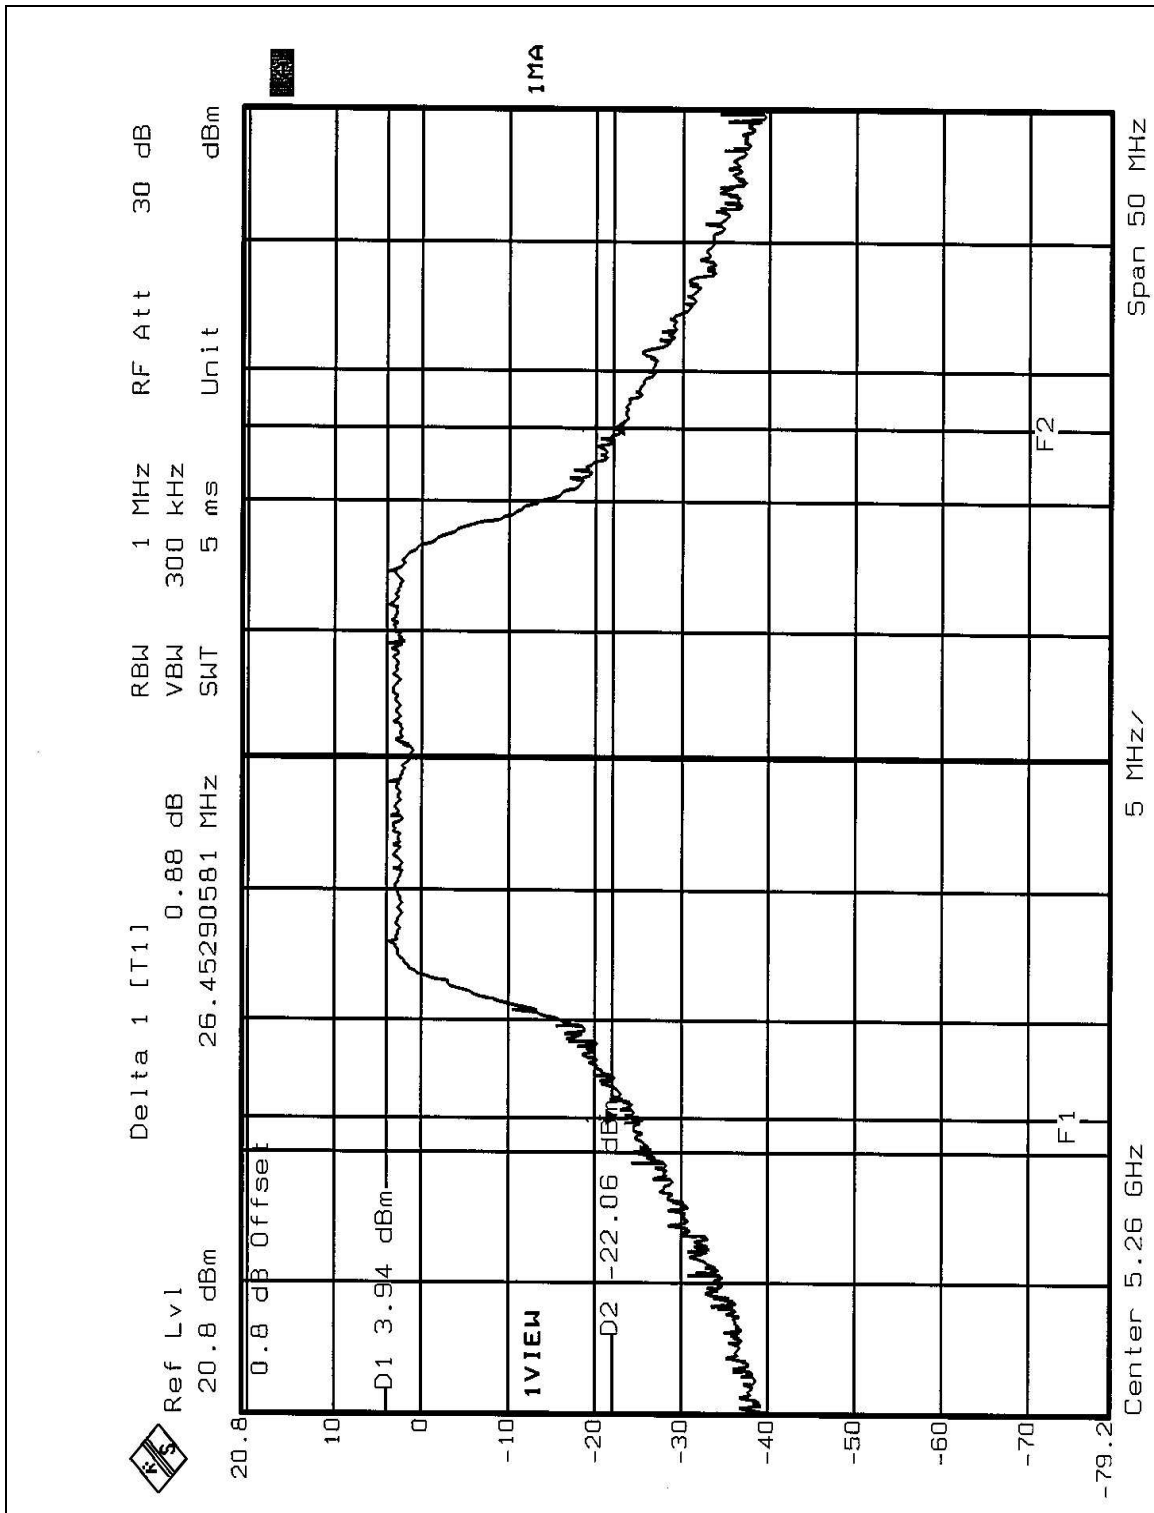




CHANNEL 8

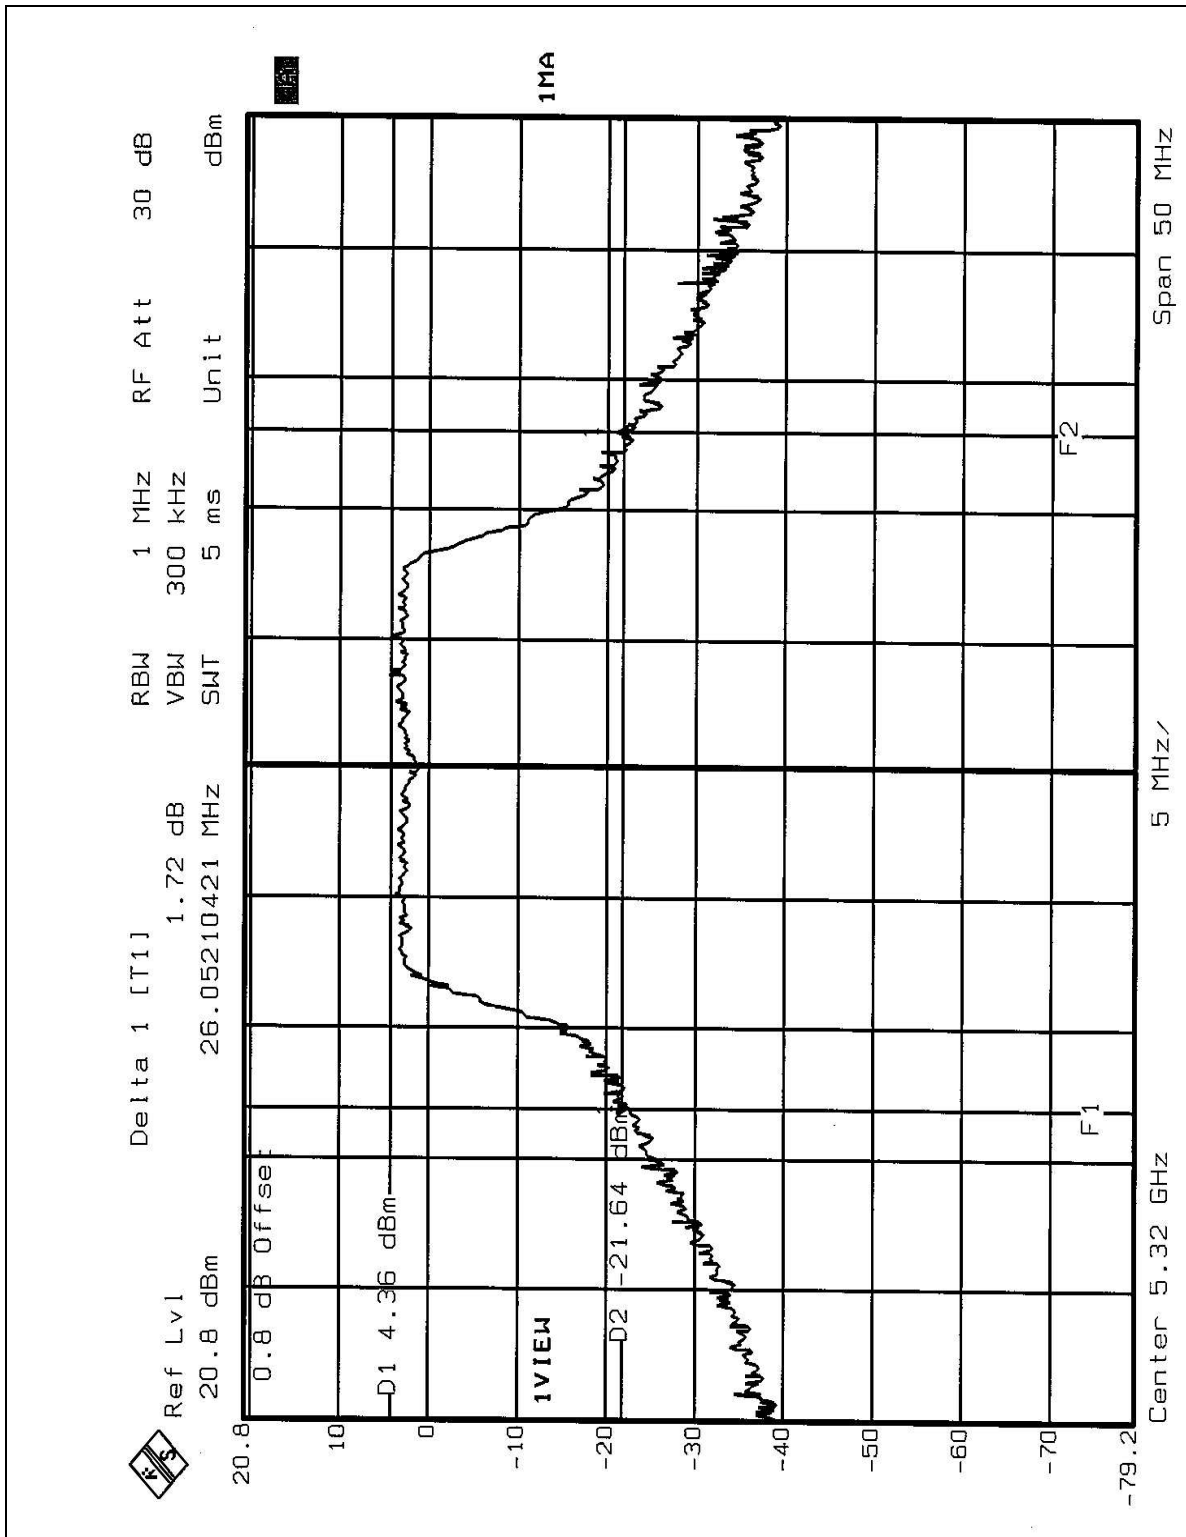




CHANNEL9

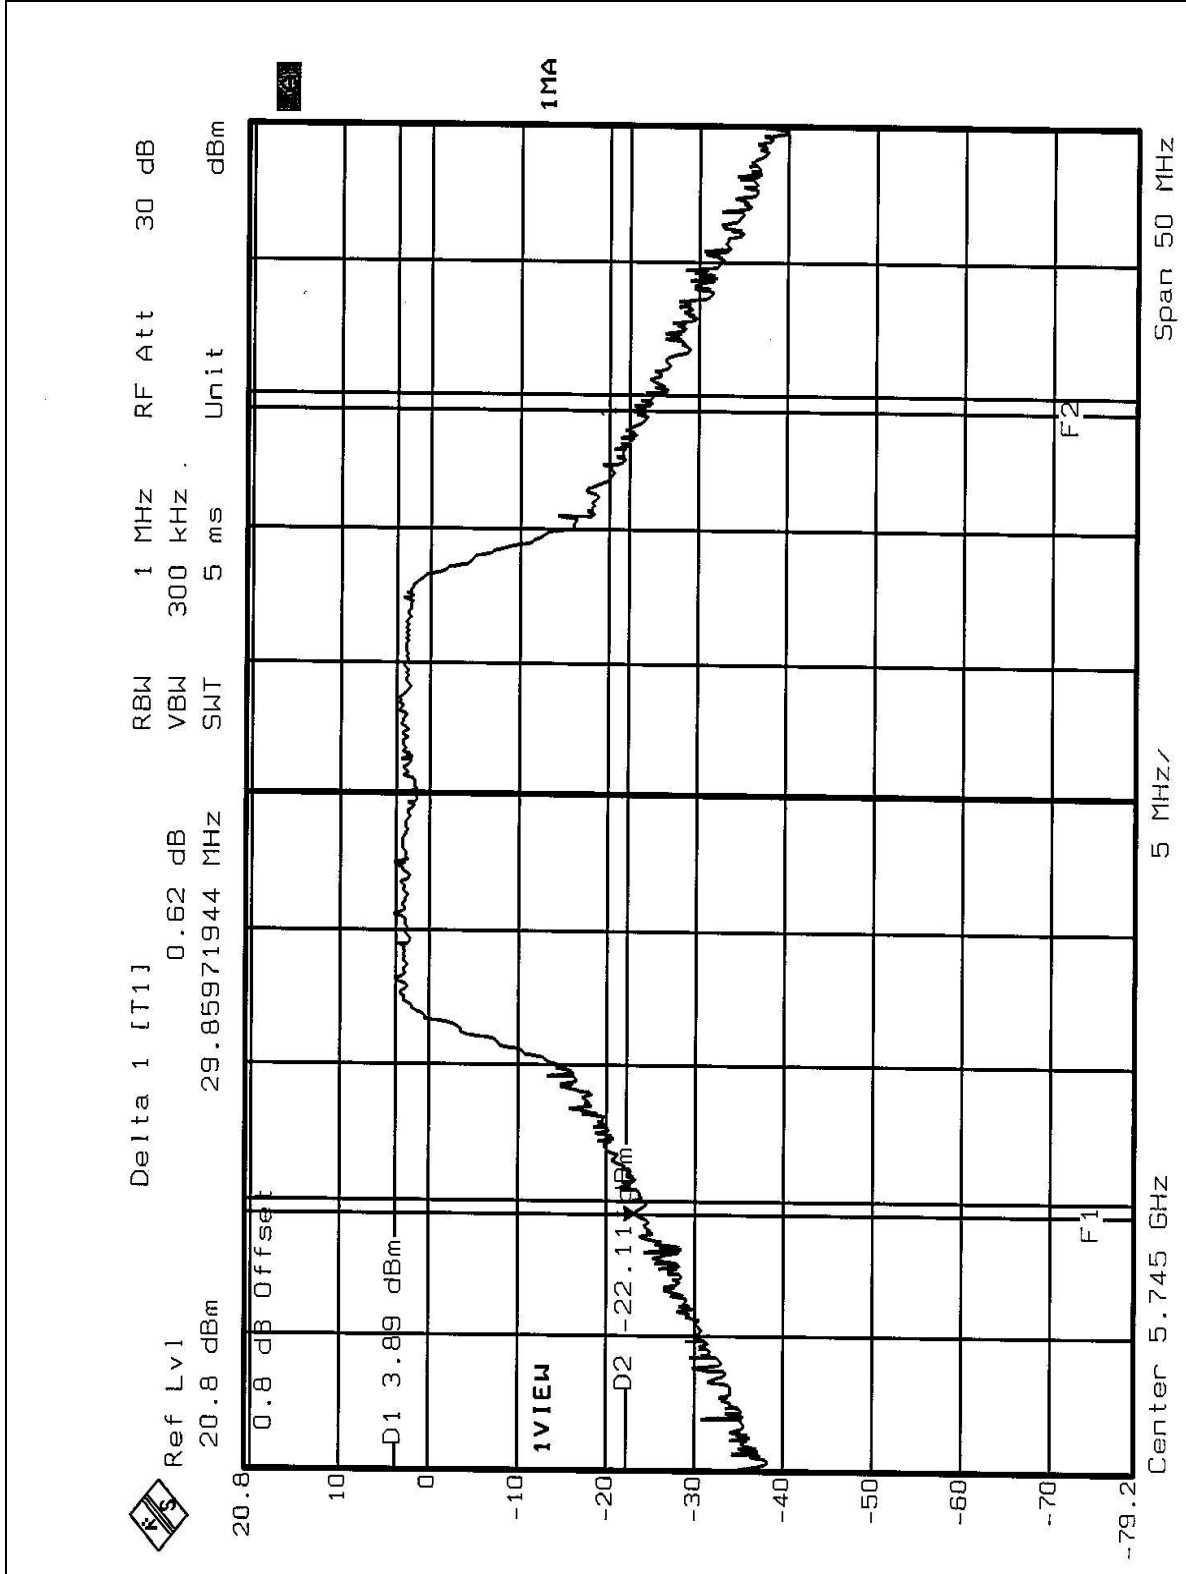



CHANNEL 12

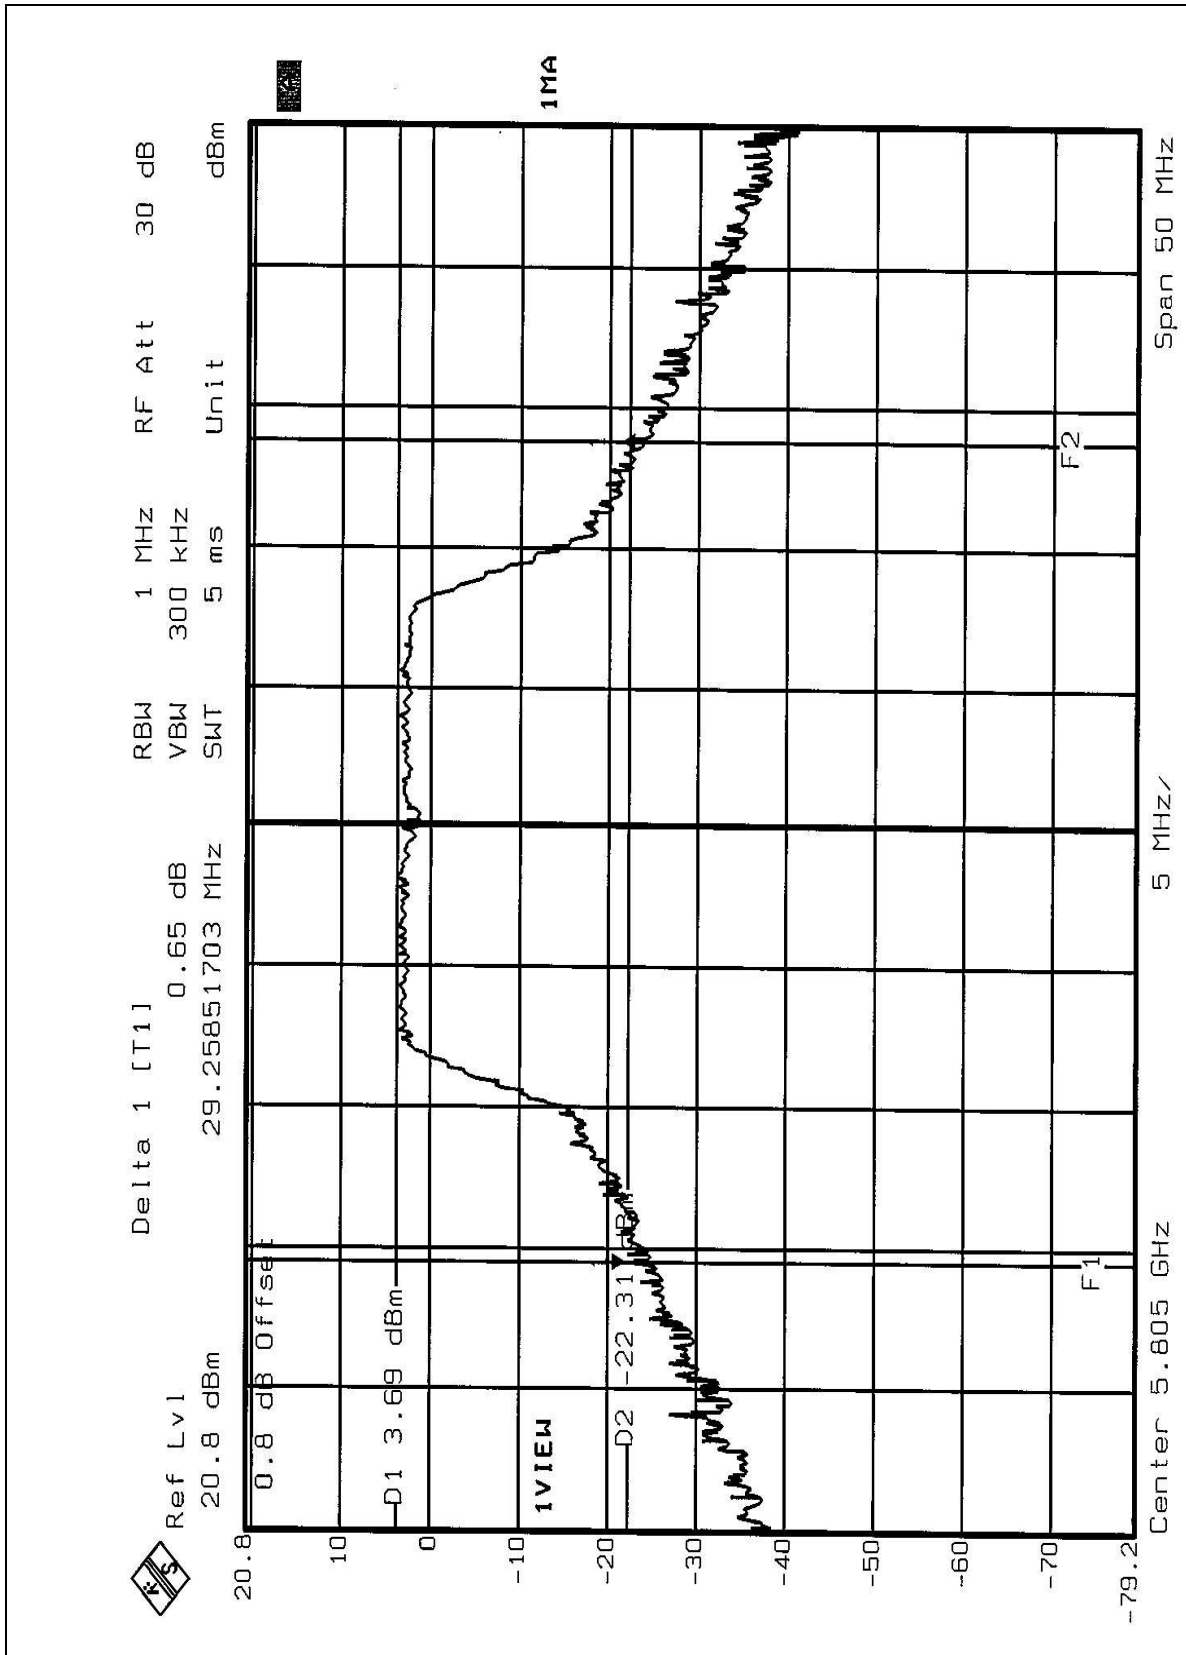



## 5.4 PEAK POWER EXCURSION MEASUREMENT

### 5.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.725 – 5.825 GHz	13dB

### 5.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE&SCHWARZ SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




### 5.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.4.5 TEST SETUP



### 5.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




## 5.4.7 TEST RESULTS

<b>EUT</b>	AirPro Dual-Band Wireless Cardbus Adapter	<b>MODEL</b>	DWL-AG650
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 69%RH, 991 hPa	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Ansen Lei		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER EXCURSION (dB)</b>	<b>PEAK to AVERAGE EXCURSION LIMIT (dB)</b>	<b>PASS/FAIL</b>
1	5180	8.61	13	PASS
4	5240	7.90	13	PASS
5	5260	7.78	13	PASS
8	5320	8.81	13	PASS
9	5745	8.02	13	PASS
12	5805	7.72	13	PASS



CHANNEL 1

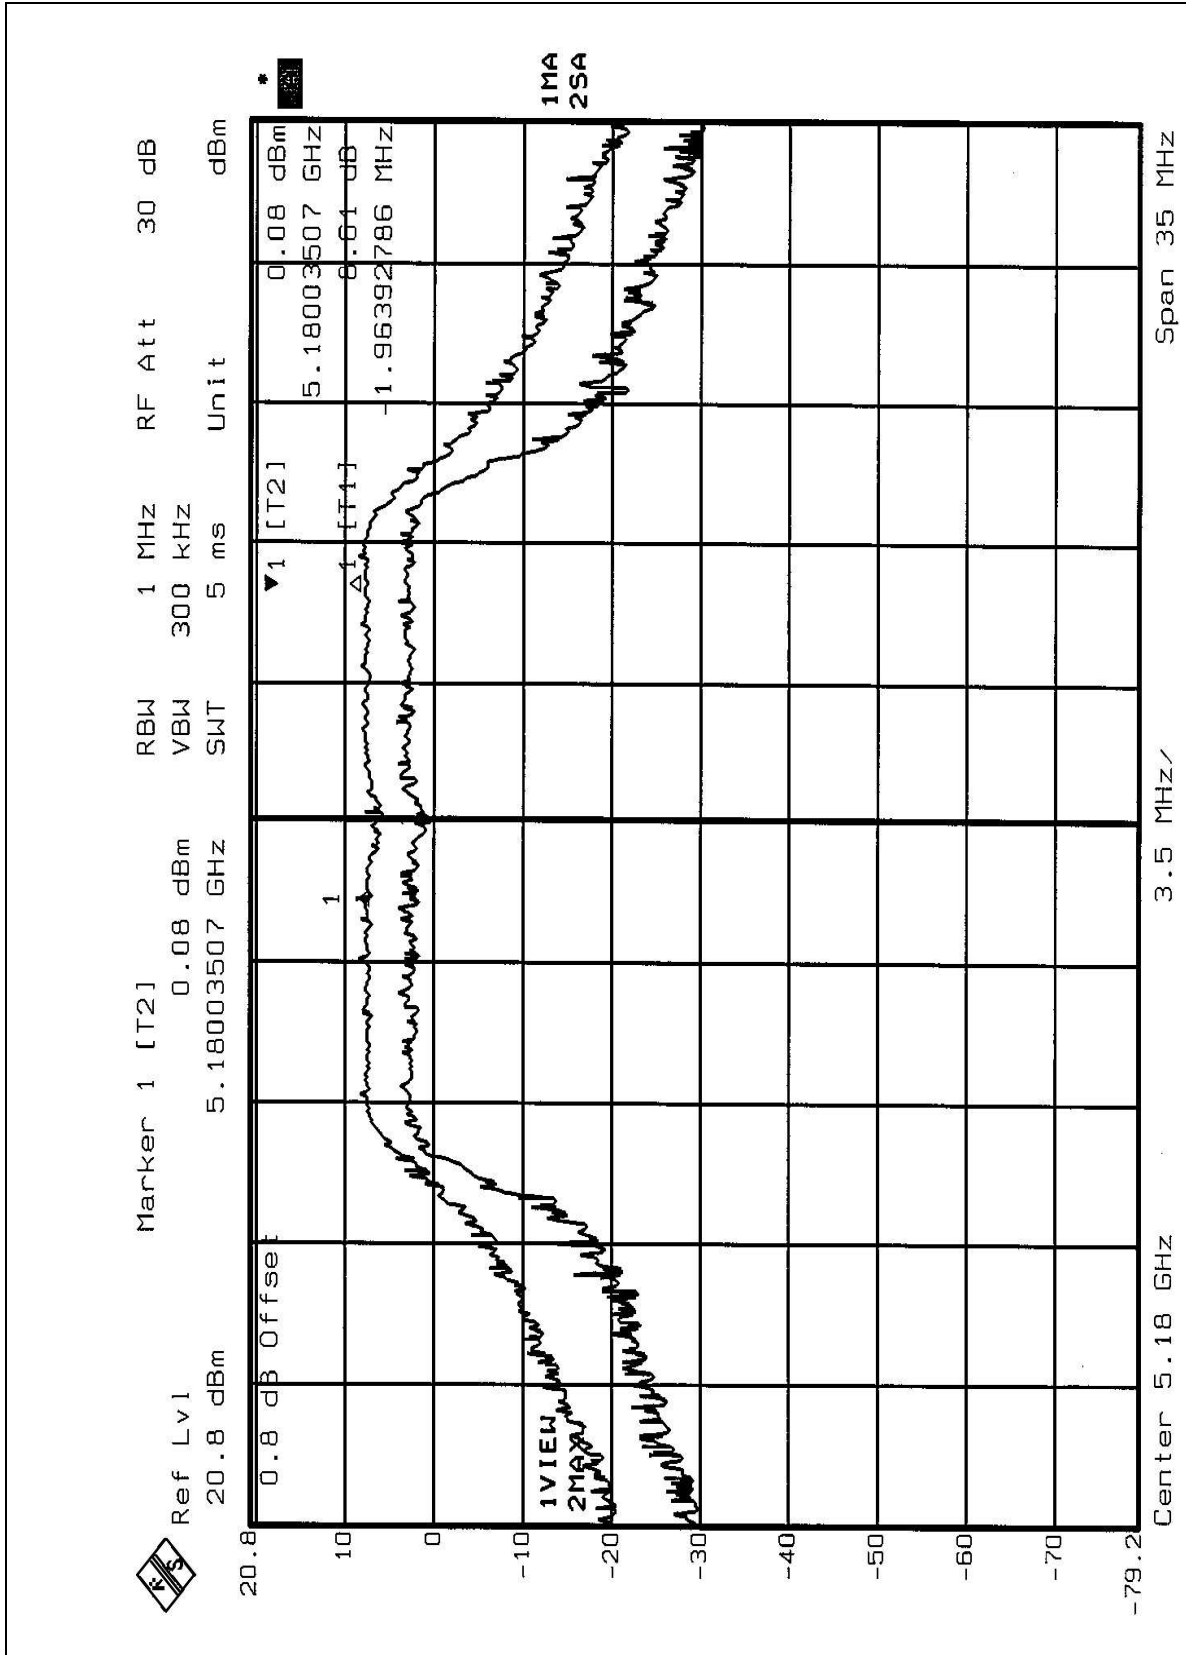



CHANNEL 4

