



Test Report

Product Name : D-Link Air 2.4GHz Wireless Access Point

Model No.: DWL-700AP

FCC ID.: KA2DWL700AP-A2

Applicant : D-Link Corporation

Address : 53 Discovery Drive Irvine, CA 92618 U.S.A.

Date of Receipt : Nov 05, 2003

Date of Test : Nov 13, 2003

Report No. : 03BH028FI

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : Nov 13, 2003
Report No. : 03BH028FI



Accredited by NIST (NVLAP)
NVLAP Lab Code: 200347-0

Product Name : D-Link Air 2.4GHz Wireless Access Point
Applicant : D-Link Corporation
Address : 53 Discovery Drive Irvine, CA 92618 U.S.A.
Manufacturer : D-Link Corporation
Model No. : DWL-700AP
FCC ID. : KA2DWL700AP-A2
Rated Voltage : AC 120V/60Hz
Trade Name : D-Link
Measurement Standard : FCC Part 15 Subpart C Paragraph 15.247
Measurement Procedure : ANSI C63.4: 1992
Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Carol Tsai
(Carol Tsai)
Tested By : Dampier Chang
(Dampier Chang)
Approved By : Kevin Wang
(Kevin Wang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description	5
1.3. Tested System Details.....	6
1.4. Configuration of tested System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. Conducted Emission.....	9
2.1. Test Equipment.....	9
2.2. Test Setup	9
2.3. Limits	9
2.4. Test Procedure	10
2.5. Test Result of Conducted Emission.....	11
3. Peak Power Output	17
3.1. Test Equipment.....	17
3.2. Test Setup	17
3.3. Limits	17
3.4. Test Result of Peak Power Output.....	18
4. Radiated Emission.....	19
4.1. Test Equipment.....	19
4.2. Test Setup	19
4.3. Limits	20
4.4. Test Procedure	20
4.5. Test Result of Radiated Emission.....	21
5. Band Edge	27
5.1. Test Equipment.....	27
5.2. Test Setup	27
5.3. Limits	29
5.4. Test Procedure	29
5.5. Test Result of Band Edge	30
6. Occupied Bandwidth	32
6.1. Test Equipment.....	32
6.2. Test Setup	32
6.3. Limits	32
6.4. Test Result of Occupied Bandwidth	33
7. Power Density	34
7.1. Test Equipment.....	34
7.2. Test Setup	34
7.3. Limits	34
7.4. Test Result of Power Density	35
8. EMI Reduction Method During Compliance Testing	36

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : D-Link Air 2.4GHz Wireless Access Point
Trade Name : D-Link
FCC ID. : KA2DWL700AP-A2
Model No. : DWL-700AP
Frequency Range : 2412MHz to 2462MHz
Channel Number : 11
Data Speed : 1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Type of Modulation : Direct Sequence Spread Spectrum
Antenna Type : Connector (Reverse SMA)
Antenna Gain : 2dBi
Channel Control : Auto
LAN Cable : Non-shielded, 3.0m
Power Adapter : D-Link, GPSA-0500251
Cable Out: Non-shielded, 1.8m

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2412 MHz	Channel 5:	2432 MHz	Channel 9:	2452 MHz
Channel 2:	2417 MHz	Channel 6:	2437 MHz	Channel 10:	2457 MHz
Channel 3:	2422 MHz	Channel 7:	2442 MHz	Channel 11:	2462 MHz
Channel 4:	2427 MHz	Channel 8:	2447 MHz		

Note:

1. This device is a 2.4GHz D-Link Air 2.4GHz Wireless Access Point included a 2.4GHz receiving function, a 2.4GHz transmitting function.
2. Regards to the frequency band operation; the highest rate that was included the lowest、middle and highest frequency of channel were selected to perform the test, then shown on this report.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. This device is a composite device in accordance with Part 15 regulations. The function receiving was measured and made a test report that the report number is 03BH028F under Declaration of Conformity.

1.2. Operational Description

EUT is a D-Link Air 2.4GHz Wireless Access Point with 11 channels. This device provided four kind of transmitting speed 1,2,5.5 and 11Mbps. The device of RF carrier is CCK.

The device adapts direct sequence spread spectrum modulation. The Connector antenna was provides diversity function to improve the receiving function.

This D-Link Air 2.4GHz Wireless Access Point is an IEEE 802.11b Wireless LAN adapter. It allows your computer to connect to a wireless network and to share resources, such as files or printers without being bound to the network wires. Operation in 2.4GHz Direct Sequence Spread Spectrum (DSSS) radio transmission, the D-Link Air 2.4GHz Wireless Access Point transfers data at speeds up to 64/128-bit Wired Equivalent Protection (WEP) algorithm is used. In addition, its standard compliance ensures that it can communicate with any 802.11b network.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
(1)	Notebook PC	LEO	DESIGNOTE	NB7017260B	Non-shielded, 1.6m
(2)	Notebook PC	DELL	Latitude 600	N/A	Non-shielded, 1.6m, a ferrite core bonded.
(3)	Wireless LAN Card	AbocCom	WLC030	N/A	--

Signal Cable Type	Signal cable Description
A. LAN Cable	Non-shielded, 1.0m

1.4. Configuration of tested System

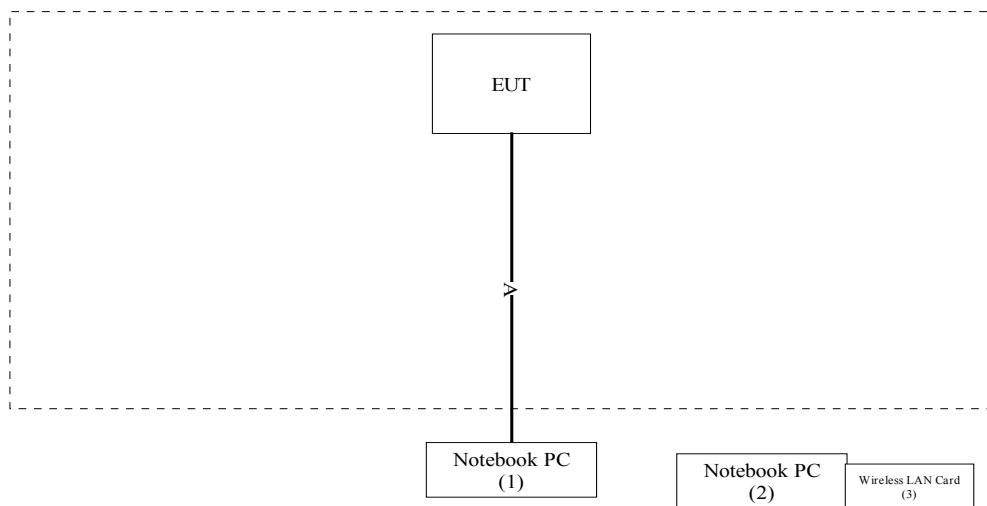

1.5. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.4
- (2) Turn on the power of all equipment.
- (3) Notebook PC reads data from disk.
- (4) Data will be transmitting through EUT.
- (5) The transmitted status will be shown on the monitor.
- (6) Repeat the above procedure 1.5.3 to 1.5.5

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2
September 30, 2003 Accreditation on NVLAP
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: No.75-1, Wang-Yeh Valley, Yung-Hsing,
Chiung-Lin, Hsin-Chu County,
Taiwan, R.O.C.
TEL : 886-3-592-8858 / FAX : 886-3-592-8859
E-Mail: service@quietek.com

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2003	
2	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2003	Peripherals
3	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2003	EUT
4	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2003	
5	No.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

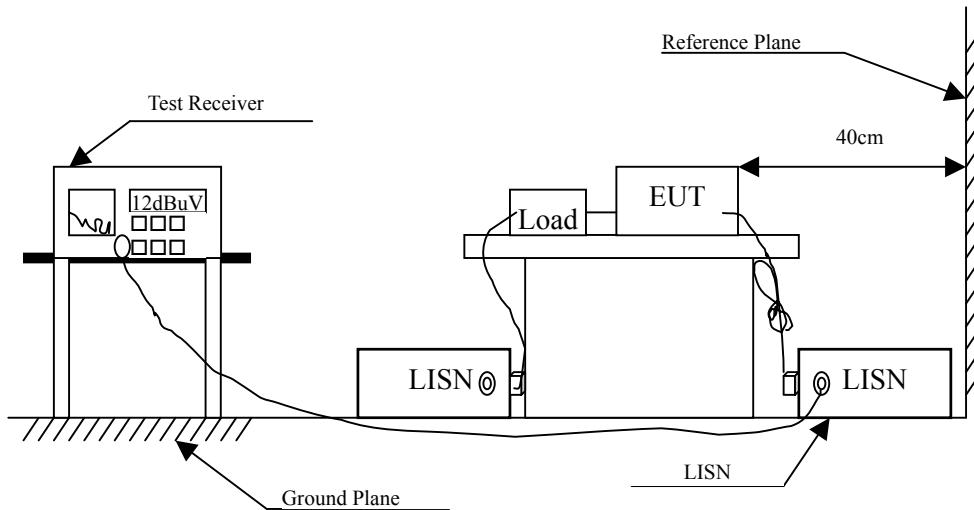

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Result of Conducted Emission

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 1

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
0.150	0.06	0.10	49.00	49.16	66.00
*	0.219	-0.03	0.14	46.84	46.95
	0.584	0.03	0.23	33.24	33.50
	1.242	0.04	0.30	31.86	32.20
	3.869	0.24	0.41	31.84	32.49
	26.547	0.36	0.59	37.10	38.04
Average					
0.150	0.06	0.10	39.80	39.96	56.00
	0.219	-0.03	0.14	37.20	37.31
*	0.584	0.03	0.23	31.90	32.16
	1.242	0.04	0.30	27.80	28.14
	3.869	0.24	0.41	27.40	28.05
	26.547	0.36	0.59	31.50	32.44

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 1

Frequency	Cable Loss	Probe Factor	Reading Level	Emission Level	Limits
MHz	dB	dB	dBuV	dBuV	dBuV

Quasi-Peak

*	0.219	-0.03	0.14	46.60	46.71	62.86
	0.654	0.04	0.24	33.66	33.94	56.00
	1.309	0.09	0.30	29.68	30.07	56.00
	2.326	0.13	0.36	29.06	29.54	56.00
	3.780	0.24	0.41	30.56	31.21	56.00
	25.692	0.28	0.59	34.48	35.34	60.00

Average

*	0.219	-0.03	0.14	38.70	38.81	52.86
	0.654	0.04	0.24	31.60	31.88	46.00
	1.309	0.09	0.30	28.10	28.49	46.00
	2.326	0.13	0.36	26.30	26.78	46.00
	3.780	0.24	0.41	26.50	27.15	46.00
	25.692	0.28	0.59	28.60	29.46	50.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “*”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 6

Frequency	Cable Loss	Probe Factor	Reading Level	Emission Level	Limits
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
0.150	0.06	0.10	43.26	43.42	66.00
*	0.218	-0.03	0.14	44.14	44.25
	0.581	0.03	0.23	33.26	33.52
	1.599	0.09	0.32	30.10	30.52
	3.923	0.26	0.41	31.08	31.74
	26.608	0.36	0.59	38.00	38.94
Average					
0.150	0.06	0.10	36.10	36.26	56.00
0.218	-0.03	0.14	35.90	36.01	52.89
*	0.581	0.03	0.23	32.00	32.26
	1.599	0.09	0.32	26.10	26.52
	3.923	0.26	0.41	27.10	27.76
	26.608	0.36	0.59	32.30	33.24

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 6

Frequency	Cable Loss	Probe Factor	Reading Level	Emission Level	Limits
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
*	0.216	-0.03	0.13	45.00	45.11
	0.582	0.03	0.23	36.38	36.64
	1.016	0.02	0.28	28.24	28.54
	2.034	0.13	0.35	28.82	29.30
	3.921	0.26	0.41	30.58	31.24
	26.608	0.36	0.59	37.84	38.78
Average					
	0.216	-0.03	0.13	37.90	38.01
*	0.582	0.03	0.23	34.00	34.26
	1.016	0.02	0.28	25.50	25.80
	2.034	0.13	0.35	26.50	26.98
	3.921	0.26	0.41	26.80	27.46
	26.608	0.36	0.59	32.10	33.04

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 11

Frequency	Cable Loss	Probe Factor	Reading Level	Emission Level	Limits
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
0.150	0.06	0.10	42.88	43.04	66.00
*	0.218	-0.03	0.14	44.18	44.29
	0.580	0.03	0.23	33.64	33.90
	1.379	0.07	0.31	30.24	30.62
	3.993	0.26	0.41	30.78	31.45
	28.685	0.48	0.60	38.64	39.72
Average					
0.150	0.06	0.10	36.00	36.16	56.00
*	0.218	-0.03	0.14	36.70	36.81
	0.580	0.03	0.23	32.20	32.46
	1.379	0.07	0.31	26.30	26.68
	3.993	0.26	0.41	26.60	27.27
	28.686	0.48	0.60	34.10	35.18

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 11

Frequency	Cable Loss	Probe Factor	Reading Level	Emission Level	Limits
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
*	0.217	-0.03	0.14	46.12	46.23
	0.581	0.03	0.23	36.54	36.80
	1.307	0.09	0.30	28.96	29.35
	1.741	0.09	0.33	28.56	28.98
	3.920	0.26	0.41	30.52	31.18
	28.684	0.48	0.60	37.56	38.64
Average					
	0.217	-0.03	0.14	39.00	39.11
*	0.581	0.03	0.23	34.00	34.26
	1.307	0.09	0.30	26.60	26.99
	1.741	0.09	0.33	26.60	27.02
	3.920	0.26	0.41	26.80	27.46
	28.684	0.48	0.60	33.40	34.48

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

3. Peak Power Output

3.1. Test Equipment


The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			Sep., 2003	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

3.2. Test Setup

Conduction Power Measurement

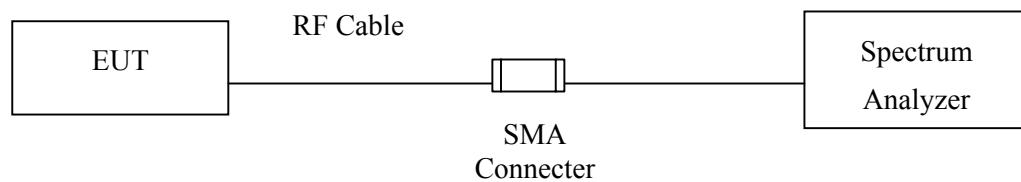

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Result of Peak Power Output

Product : D-Link Air 2.4GHz Wireless Access Point
Test Item : Peak Power Output
Test Site : No.1 OATS
Test Mode : Normal Operation

Channel No.	Frequency(MHz)	Measurement	Required Limit	Result
1	2412.00	16.12dBm	1Watt= 30 dBm	Pass
6	2437.00	15.85dBm	1Watt= 30 dBm	Pass
11	2462.00	15.11dBm	1Watt= 30 dBm	Pass

4. Radiated Emission


4.1. Test Equipment

The following test equipment are used during the test:

Test Site	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.
OATS # 1	X Test Receiver	R & S	ESCS 30 / 825442/017	Jan., 2003
	X Spectrum Analyzer	Advantest	R3261C / 81720266	N/A
	X Pre-Amplifier	HP	8447D / 2944A09276	N/A
	X Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2003
OATS # 2	Test Receiver	R & S	ESCS 30 / 836858/023	Jan., 2003
	Spectrum Analyzer	Advantest	R3261C / 81720471	N/A
	Pre-Amplifier	QuieTek	QTK-AMP / AMP1	N/A
	Bilog Antenna	Chase	CBL6112B / 2708	Sep., 2003
OATS # 3	Test Receiver	R & S	ESCS 30 / 825442/014	Jun., 2003
	Spectrum Analyzer	Advantest	R3162 / 91700283	N/A
	Pre-Amplifier	Advantest	BB525C / N/A	N/A
	Bilog Antenna	Schaffner	CBL6112B / 2673	Sep., 2003

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

4.2. Test Setup

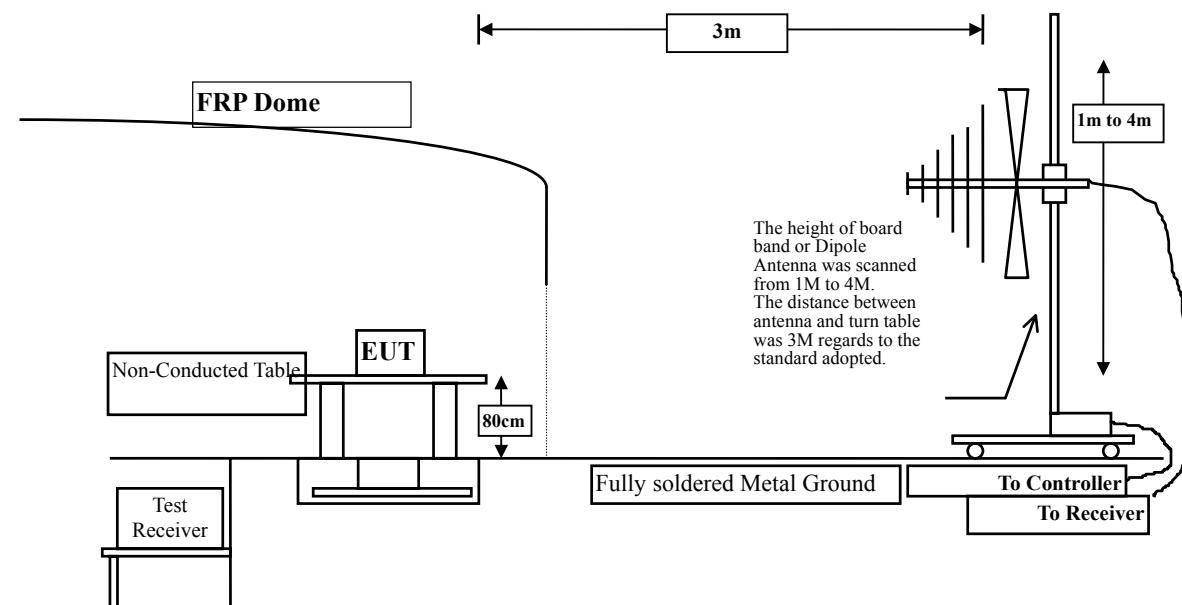

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks : 1. RF Voltage (dBuV) = $20 \log_{10}$ RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Test Result of Radiated Emission

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 1

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
<hr/>							

Horizontal

Peak Detector:

4823.889	4.24	31.28	34.38	51.92	53.07	20.93	74.00
7236.050	5.63	36.54	34.94	42.34	49.57	24.43	74.00
9648.030	7.01	37.98	34.43	41.25	51.81	22.19	74.00
12060.24	8.40	38.59	33.24	39.20	< 52.95	21.05	74.00

Vertical

Peak Detector:

4824.010	4.24	31.31	34.38	55.26	56.43	17.57	74.00
7236.158	5.63	36.54	34.94	42.59	49.82	24.18	74.00
9647.909	7.01	37.98	34.43	42.29	52.85	21.15	74.00
12059.88	8.40	38.59	33.24	39.24	< 52.99	21.01	74.00

Average Detector:

4824.430	4.24	31.31	34.38	49.83	51.00	3.00	54.00
----------	------	-------	-------	-------	-------	------	-------

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz .
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz .
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
<hr/>							

Horizontal

Peak Detector:

4873.956	4.27	31.37	34.37	51.34	52.62	21.38	74.00
7311.206	5.67	36.56	34.97	43.23	50.49	23.51	74.00
9748.168	7.07	38.13	34.31	40.51	51.40	22.60	74.00
12185.38	8.47	38.51	33.31	39.62 <	53.28	20.72	74.00

Vertical

Peak Detector:

4873.818	4.27	31.37	34.37	54.13	55.41	18.59	74.00
7311.258	5.67	36.56	34.97	43.59	50.85	23.15	74.00
9748.513	7.07	38.13	34.31	40.62	51.51	22.49	74.00
12185.68	8.47	38.51	33.31	39.64 <	53.30	20.70	74.00

Average Detector:

4874.430	4.27	31.37	34.37	50.22	51.50	2.50	54.00
----------	------	-------	-------	-------	-------	------	-------

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz .
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz .
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 11

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
<hr/>							

Horizontal

Peak Detector:

4923.918	4.30	31.43	34.36	50.18	51.55	22.45	74.00
7384.327	5.71	36.58	35.01	40.92	48.20	25.80	74.00
9844.566	7.12	38.18	34.20	40.30	51.39	22.61	74.00
12304.84	8.53	38.43	33.39	39.81 <	53.39	20.61	74.00

Vertical

Peak Detector:

4924.056	4.30	31.43	34.36	53.53	54.90	19.10	74.00
7384.190	5.71	36.58	35.01	41.35	48.63	25.37	74.00
9844.587	7.12	38.18	34.20	40.27	51.36	22.64	74.00
12305.17	8.53	38.43	33.39	39.77 <	53.35	20.65	74.00

Average Detector:

4923.590	4.30	31.43	34.36	50.18	51.55	2.45	54.00
----------	------	-------	-------	-------	-------	------	-------

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz .
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz .
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 1

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

*	49.400	1.10	3.83	22.60	50.80	33.12	6.88	40.00
	374.350	2.43	15.09	22.60	36.00	30.92	15.08	46.00
	496.570	2.93	17.80	22.60	34.20	32.34	13.66	46.00
	621.700	3.45	19.09	22.60	32.40	32.34	13.66	46.00
	745.860	3.96	19.29	22.60	31.80	32.45	13.55	46.00
	870.020	4.47	24.87	22.60	29.80	36.54	9.46	46.00

Vertical

*	44.550	1.08	11.48	22.60	47.60	37.56	2.44	40.00
	77.530	1.21	10.28	22.60	47.00	35.89	4.11	40.00
	103.720	1.32	15.97	22.60	42.60	37.29	6.21	43.50
	224.000	1.81	13.06	22.60	38.20	30.47	15.53	46.00
	497.540	2.94	16.88	22.60	32.20	29.42	16.58	46.00
	870.020	4.47	24.15	22.60	27.40	33.42	12.58	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “*”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

*	50.370	1.10	3.71	22.60	50.00	32.21	7.79	40.00
	141.550	1.48	8.45	22.60	35.40	22.72	20.78	43.50
	374.350	2.43	15.09	22.60	35.20	30.12	15.88	46.00
	496.570	2.93	17.80	22.60	34.40	32.54	13.46	46.00
	621.700	3.45	19.09	22.60	32.80	32.74	13.26	46.00
	745.860	3.96	19.29	22.60	32.20	32.85	13.15	46.00

Vertical

*	44.550	1.08	11.48	22.60	47.00	36.96	3.04	40.00
	103.720	1.32	15.97	22.60	40.60	35.29	8.21	43.50
	144.460	1.49	14.86	22.60	40.60	34.35	9.15	43.50
	224.000	1.81	13.06	22.60	38.20	30.47	15.53	46.00
	497.540	2.94	16.88	22.60	32.60	29.82	16.18	46.00
	870.020	4.47	24.15	22.60	26.20	32.22	13.78	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 11

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

*	51.340	1.10	3.59	22.60	51.40	33.49	6.51	40.00
	374.350	2.43	15.09	22.60	36.00	30.92	15.08	46.00
	496.570	2.93	17.80	22.60	34.60	32.74	13.26	46.00
	621.700	3.45	19.09	22.60	32.40	32.34	13.66	46.00
	746.830	3.96	19.35	22.60	32.20	32.91	13.09	46.00
	870.020	4.47	24.87	22.60	29.00	35.74	10.26	46.00

Vertical

*	44.550	1.08	11.48	22.60	46.60	36.56	3.44	40.00
	103.720	1.32	15.97	22.60	41.00	35.69	7.81	43.50
	139.610	1.47	14.15	22.60	41.80	34.82	8.68	43.50
	224.000	1.81	13.06	22.60	38.20	30.47	15.53	46.00
	498.510	2.94	16.94	22.60	33.80	31.08	14.92	46.00
	745.860	3.96	20.35	22.60	28.40	30.10	15.90	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

5. Band Edge

5.1. Test Equipment

The following test equipment are used during the test:

RF Conducted Measurement:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			Sep., 2003	


RF Radiated Measurement:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.
1	X Spectrum Analyzer	R & S	FSP40 / 100005	Aug., 2003
2	X Pre-Amplifier	HP	8449B / 3008A01123	Feb., 2003
3	Pre-Amplifier	HP	8447D / 2944A09276	N/A
4	Loop Antenna	R & S	HFH2-Z2 / 833799/004	Sep., 2003
5	BiconiLog Antenna	Schwarzbeck	VULB 9166 / 1061	Sep., 2003
6	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2003
7	X Horn Antenna	Schwarzbeck	BBHA 9120D / BBHA9120D312	Jul., 2003
8	No.1 OATS			Sep., 2003


- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

RF Conducted Measurement:

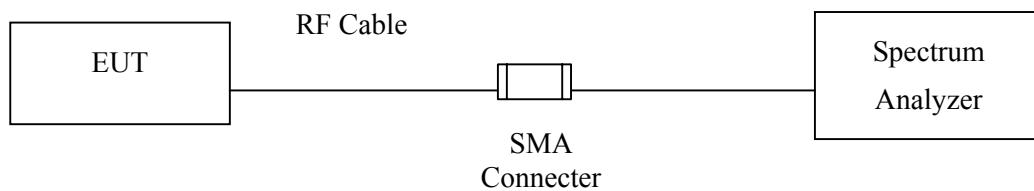

RF Radiated Measurement:

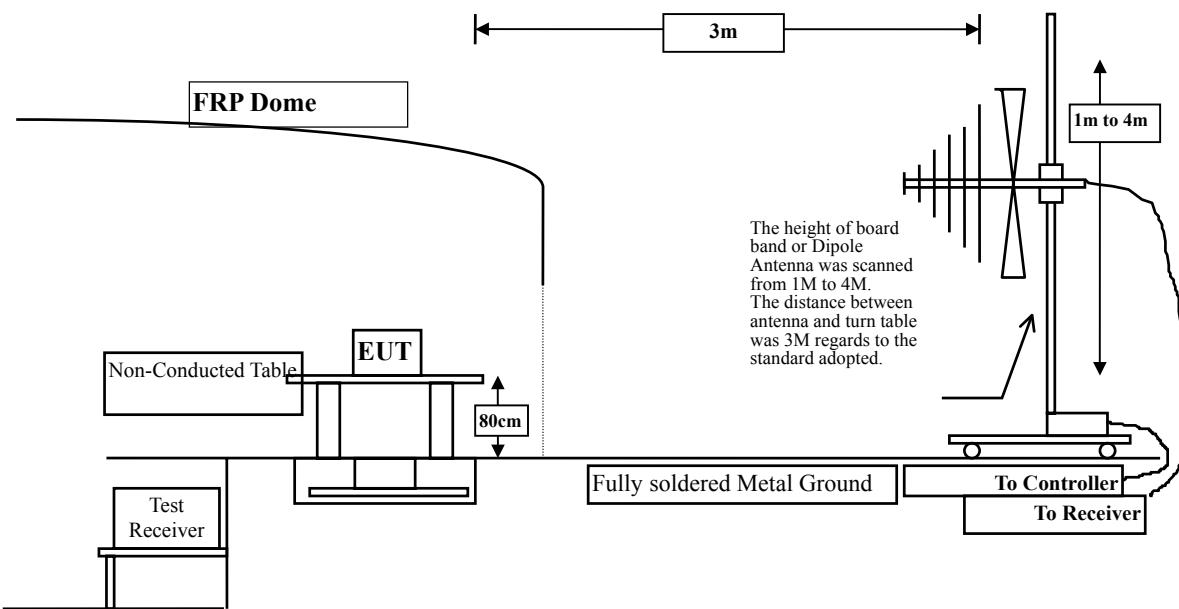

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

5.5. Test Result of Band Edge

Product : D-Link Air 2.4GHz Wireless Access Point
Test Item : Band Edge
Test Site : No.1 OATS
Test Mode : Channel 1

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


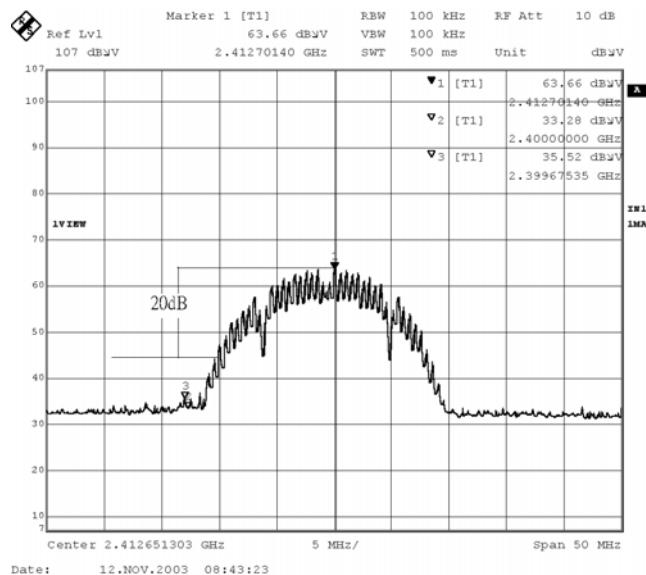


Figure Channel 1: (Vertical)

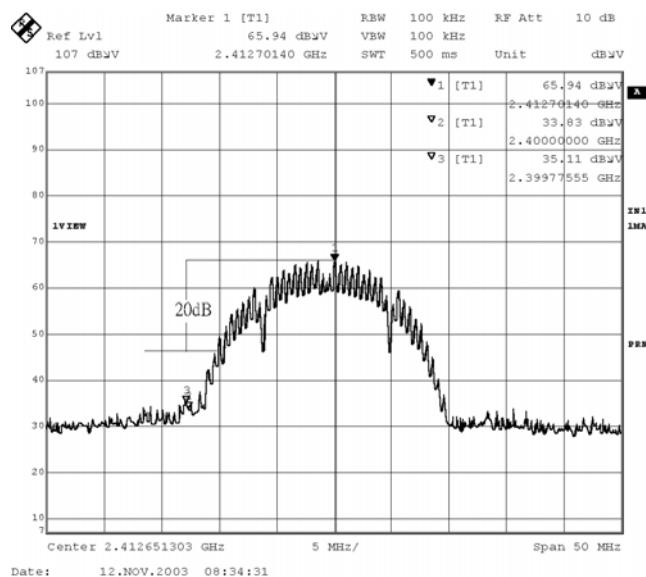

Product : D-Link Air 2.4GHz Wireless Access Point
Test Item : Band Edge
Test Site : No.1 OATS
Test Mode : Channel 11

RF Radiated Measurement: (Peak Detector)

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	PreAMP (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2484.100	49.72	27.58	2.90	34.58	49.72	74	Pass
11 (Vertical)	2483.850	57.23	27.58	2.90	34.58	53.13	74	Pass

Figure Channel 11:


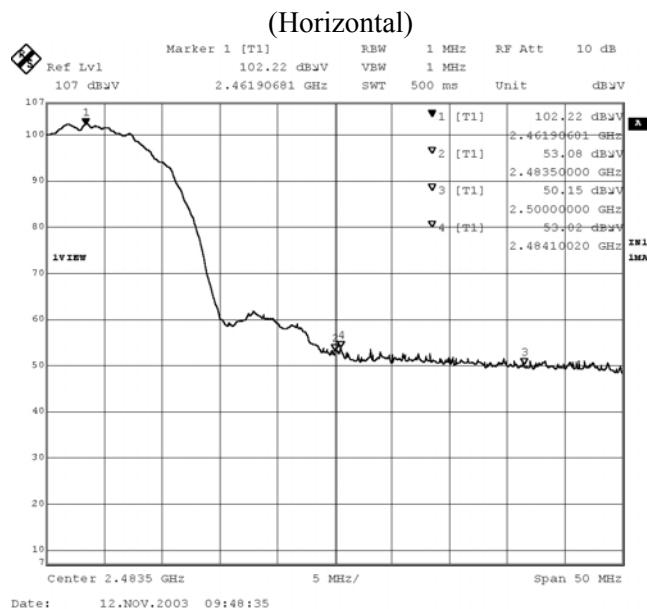


Figure Channel 11:

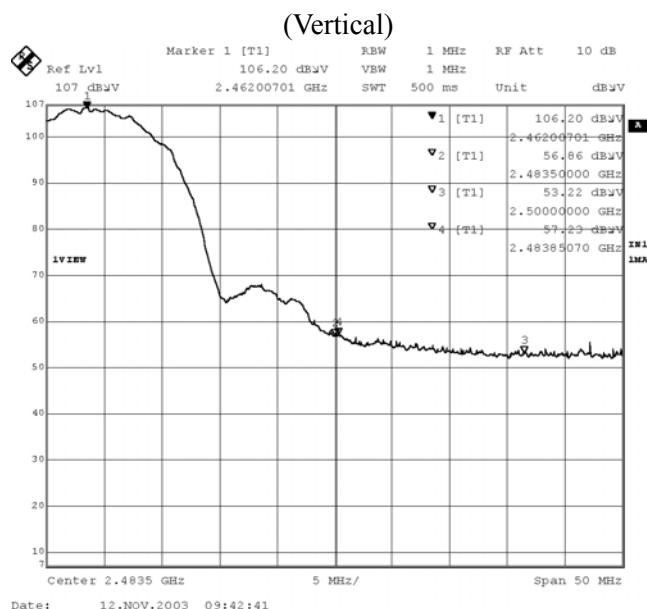

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

6. Occupied Bandwidth


6.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			Sep., 2003	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

6.2. Test Setup

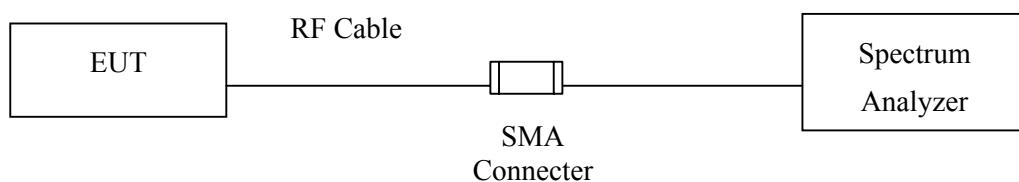

6.3. Limits


The minimum 6dB bandwidth shall be at least 500kHz.

6.4. Test Result of Occupied Bandwidth

Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Occupied Bandwidth
 Test Site : No.1 OATS
 Test Mode : Normal Operation


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.800	12600	>500	Pass
6	2443.200	12600	>500	Pass
11	2462.800	12600	>500	Pass

Channel 1:

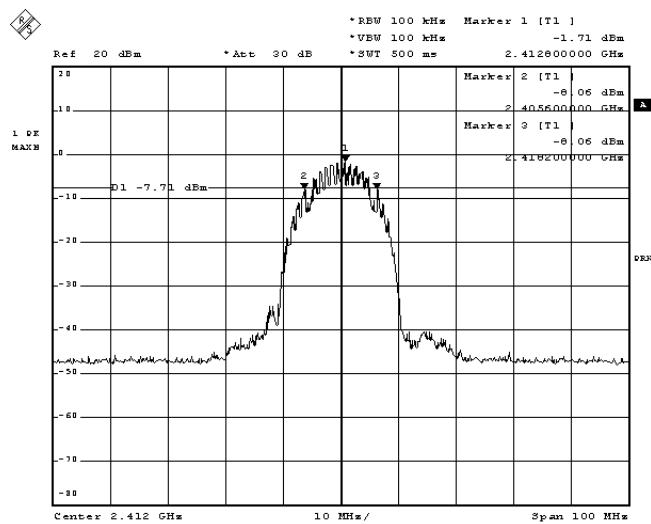


Date: 11.NOV.2003 10:19:55

Channel 6

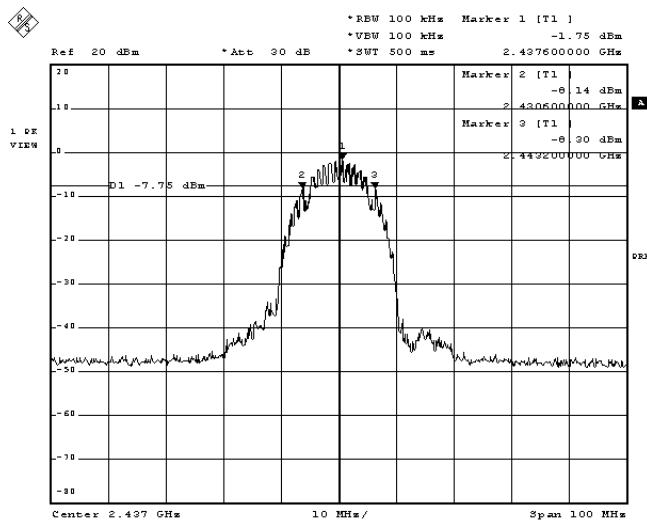

Date: 11.NOV.2003 10:25:17

Channel 11:

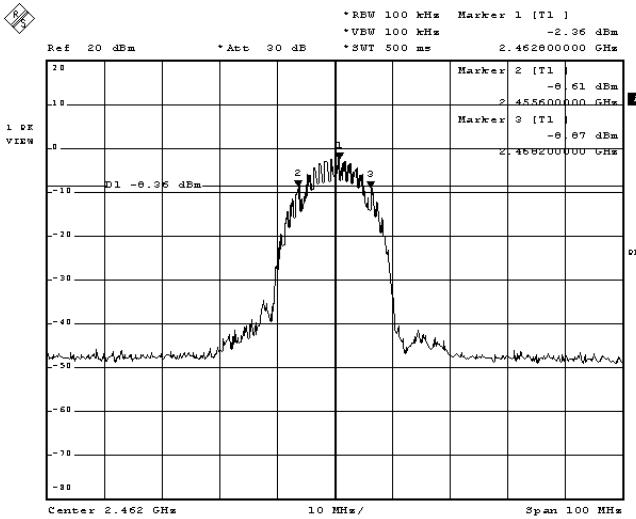

Date: 11.NOV.2003 10:36:04

7. Power Density


7.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2003	
2	No.1 OATS			Sep., 2003	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

7.2. Test Setup

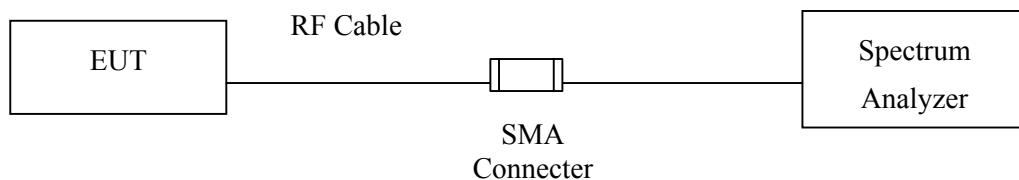

7.3. Limits


The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

7.4. Test Result of Power Density


Product : D-Link Air 2.4GHz Wireless Access Point
 Test Item : Power Density
 Test Site : No.1 OATS
 Test Mode : Normal Operation

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
1	2412.684	-2.88	< 8dBm	Pass
6	2437.684	-3.16	< 8dBm	Pass
11	2462.684	-3.26	< 8dBm	Pass

Channel 1:

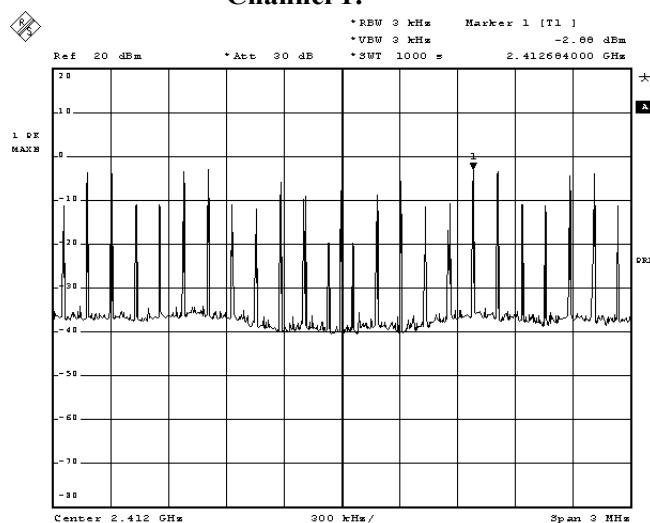


Channel 6:

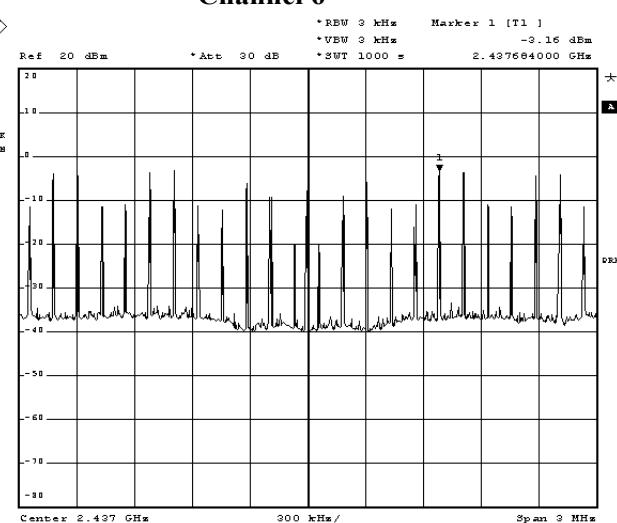

Date: 11.NOV.2003 10:16:27

Date: 11.NOV.2003 10:29:30

Channel 11:

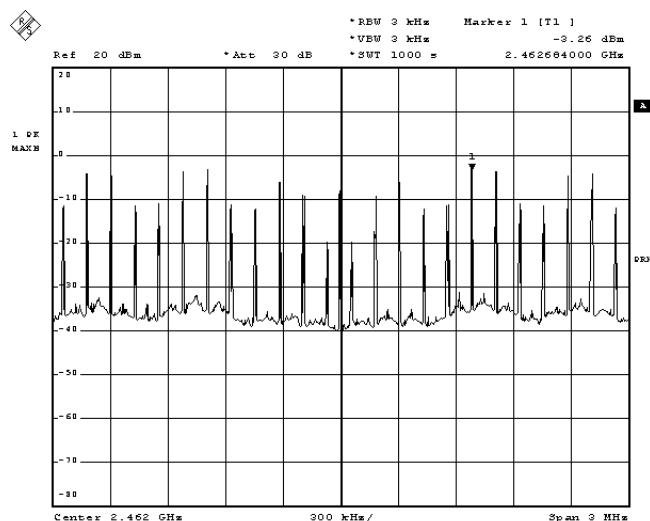

Date: 11.NOV.2003 11:53:16

8. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs