
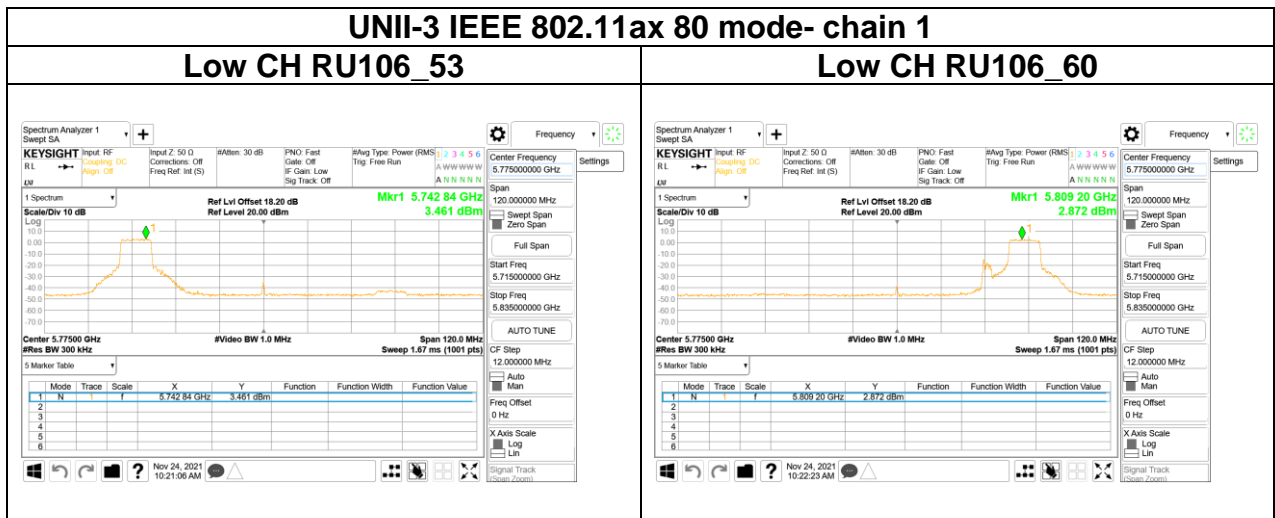


Report No.: T210319W02-RP2

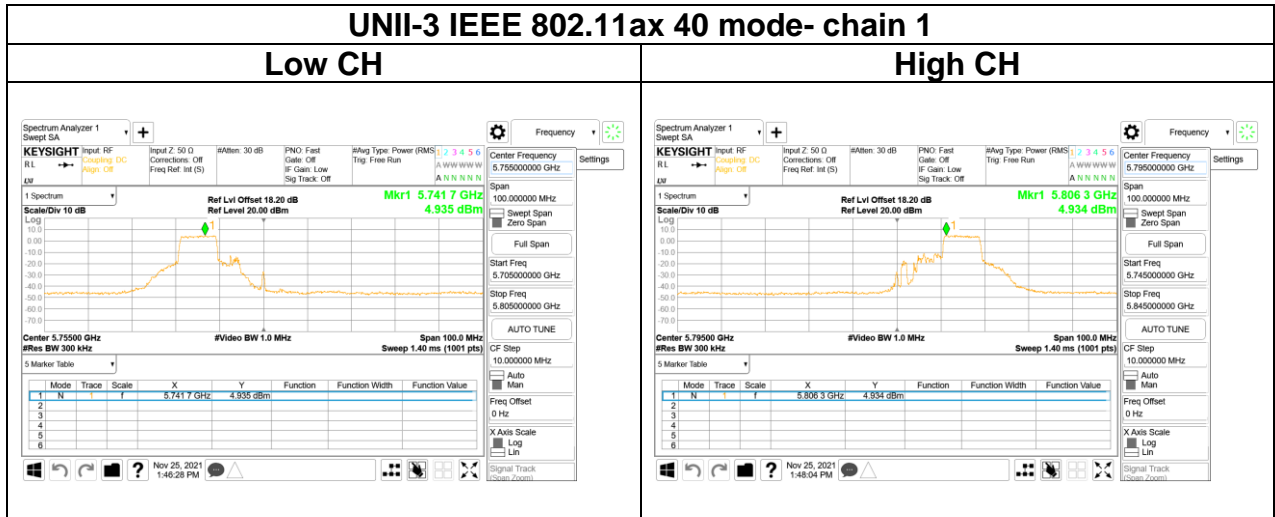

Report No.: T210319W02-RP2

4.5 RADIATION BANDEGE AND SPURIOUS EMISSION

4.5.1 Test Limit

FCC according to §15.407, §15.209 and §15.205,

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

UNII-1 :

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz

UNII-3:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Report No.: T210319W02-RP2

4.5.2 Test Procedure


Test method Refer as KDB 789033 D02.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)
5. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW $\geq 3 \cdot$ RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW ≥ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - If Duty Cycle $\geq 98\%$, VBW=10Hz.
 - If Duty Cycle $< 98\%$, VBW=1/T.
- (3) Data result
 - Actual FS=Spectrum Reading Level + Factor
 - Margin=Actual FS- Limit


Report No.: T210319W02-RP2

4.5.3 Test Setup

9kHz ~ 30MHz

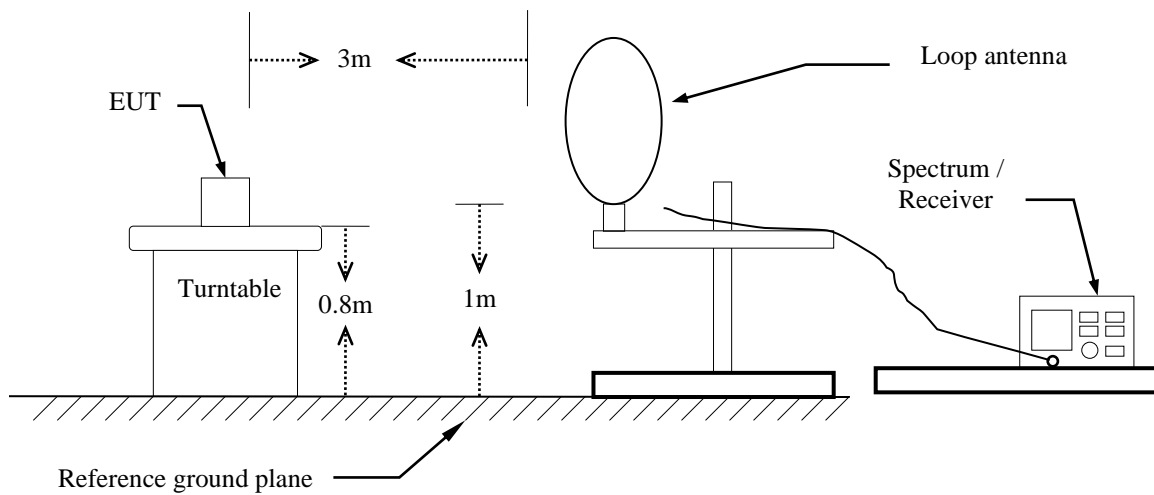


30MHz ~ 1GHz

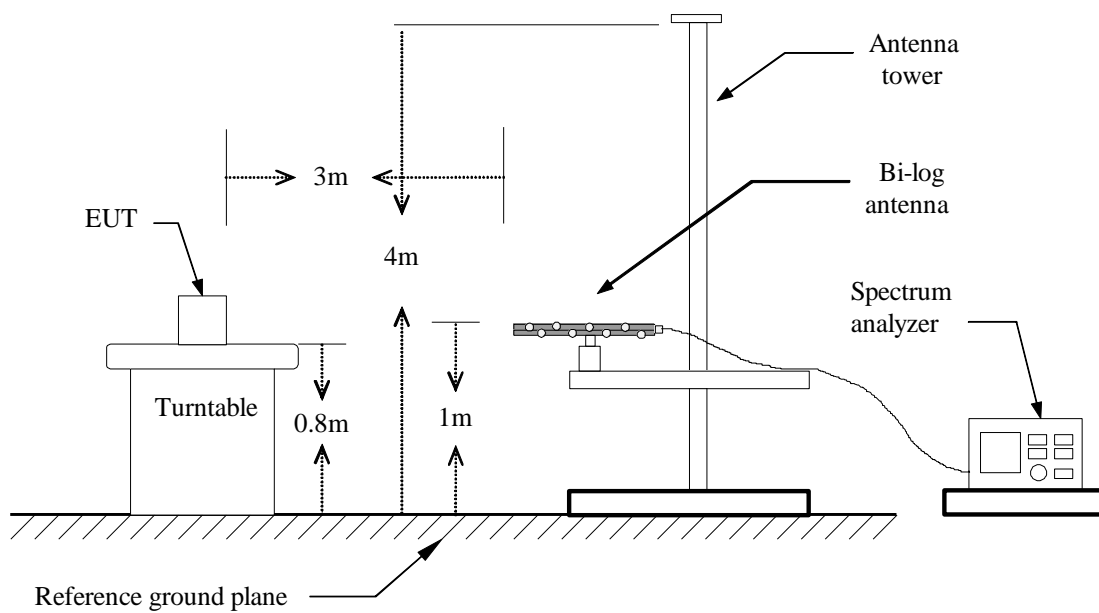

Report No.: T210319W02-RP2

Above 1 GHz

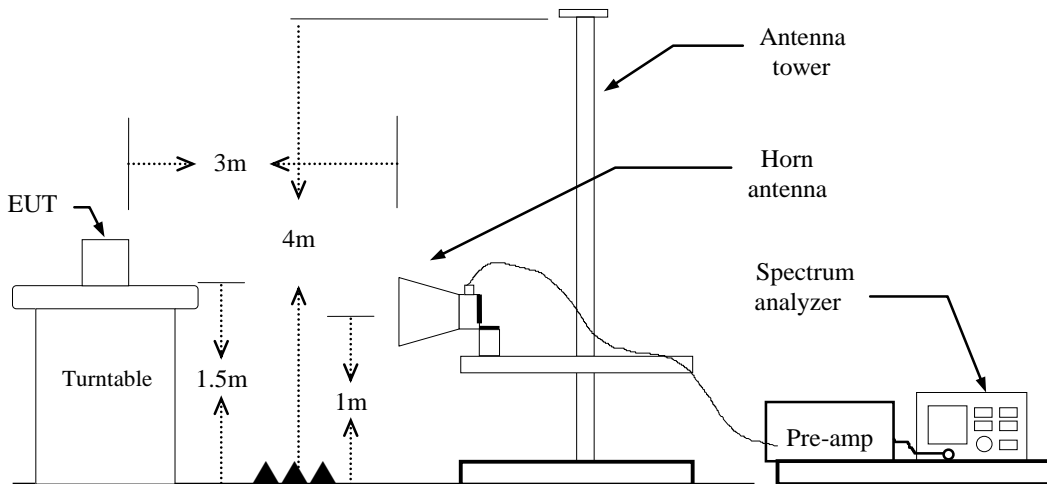


4.5.4 Test Result

Band Edge Test Data (Non-BeanForming Mode)

Test Data for UNII-1


Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

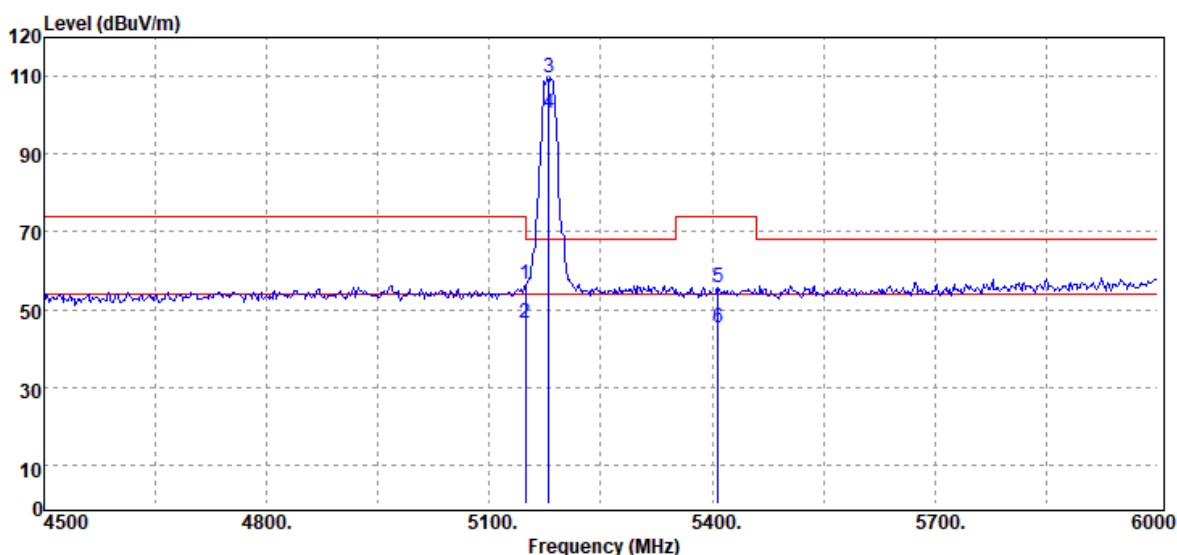

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5148.00	Peak	37.65	19.00	56.65	74.00	-17.35
5148.00	Average	27.34	19.00	46.34	54.00	-7.66
5180.00	Peak	90.40	19.19	109.59	--	--
5180.00	Average	81.39	19.19	100.58	--	--
5407.50	Peak	35.59	20.06	55.65	74.00	-18.35
5407.50	Average	25.16	20.06	45.22	54.00	-8.78

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

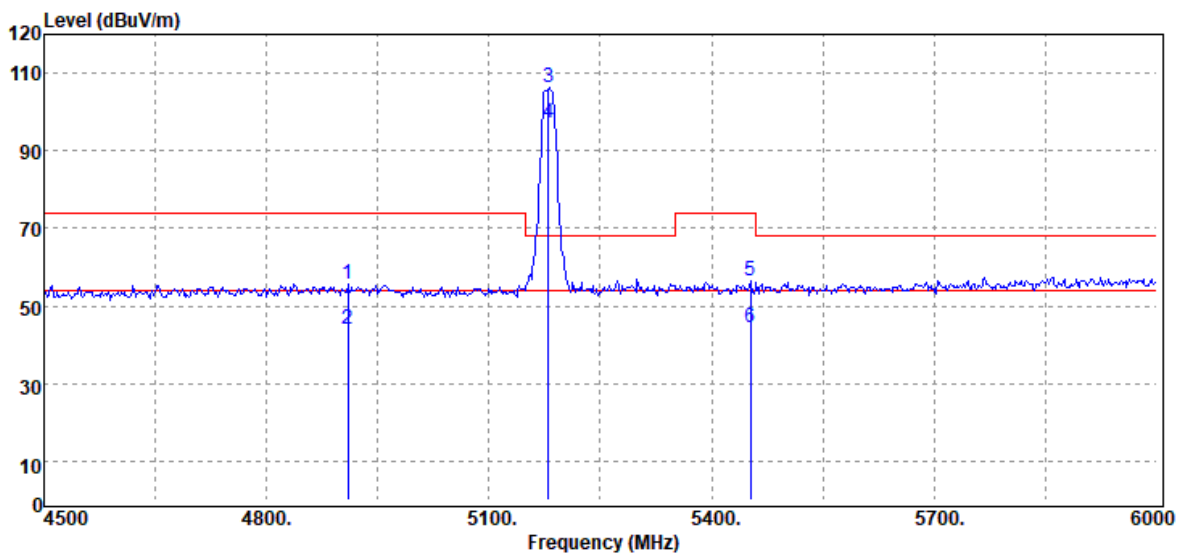

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4909.50	Peak	37.10	18.60	55.70	74.00	-18.30
4909.50	Average	25.39	18.60	43.99	54.00	-10.01
5180.00	Peak	86.91	19.19	106.10	--	--
5180.00	Average	78.06	19.19	97.25	--	--
5452.50	Peak	36.55	20.06	56.61	74.00	-17.39
5452.50	Average	24.43	20.06	44.49	54.00	-9.51

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5180MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

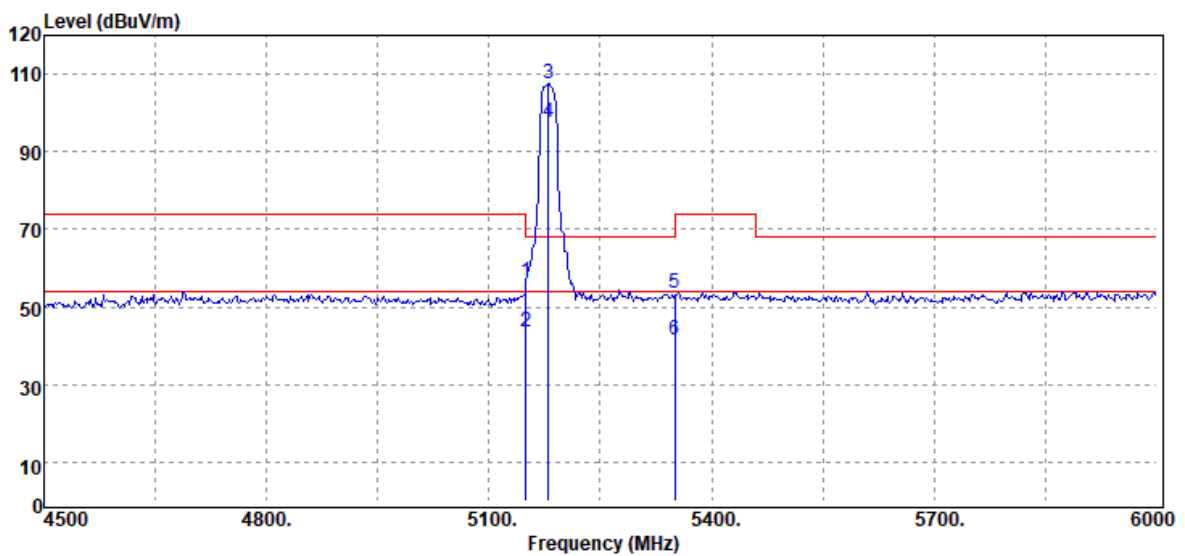

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.50	Peak	37.45	19.00	56.45	74.00	-17.55
5149.50	Average	24.71	19.00	43.71	54.00	-10.29
5180.00	Peak	88.35	19.19	107.54	--	--
5180.00	Average	78.31	19.19	97.50	--	--
5350.00	Peak	33.89	19.82	53.71	74.00	-20.29
5350.00	Average	21.87	19.82	41.69	54.00	-12.31


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz / 5180MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

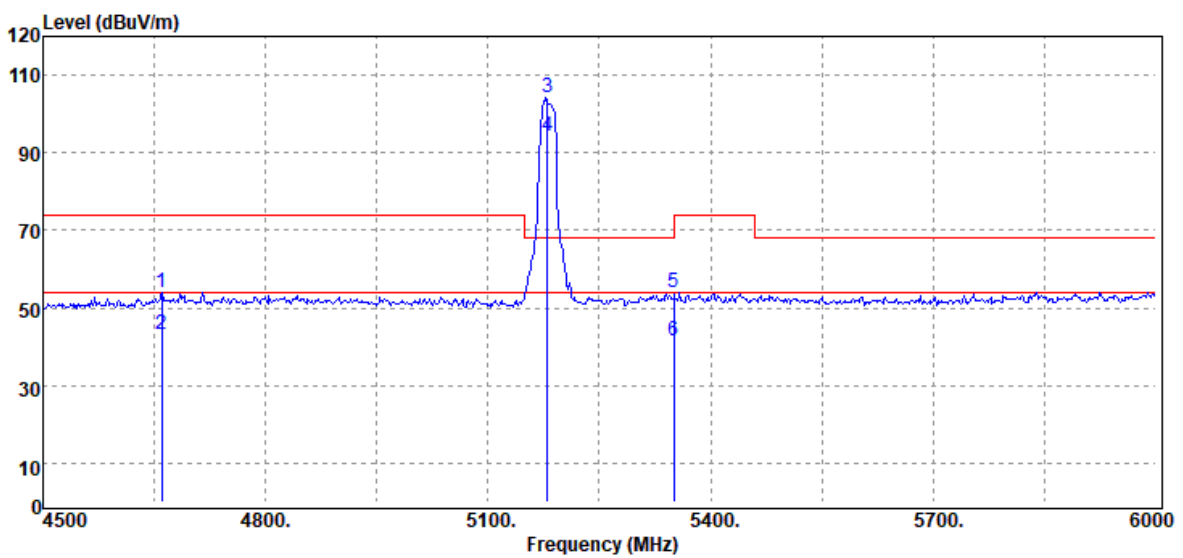

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4660.50	Peak	35.60	18.42	54.02	74.00	-19.98
4660.50	Average	24.88	18.42	43.30	54.00	-10.70
5180.00	Peak	84.98	19.19	104.17	--	--
5180.00	Average	75.01	19.19	94.20	--	--
5350.00	Peak	34.14	19.82	53.96	74.00	-20.04
5350.00	Average	21.70	19.82	41.52	54.00	-12.48


Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

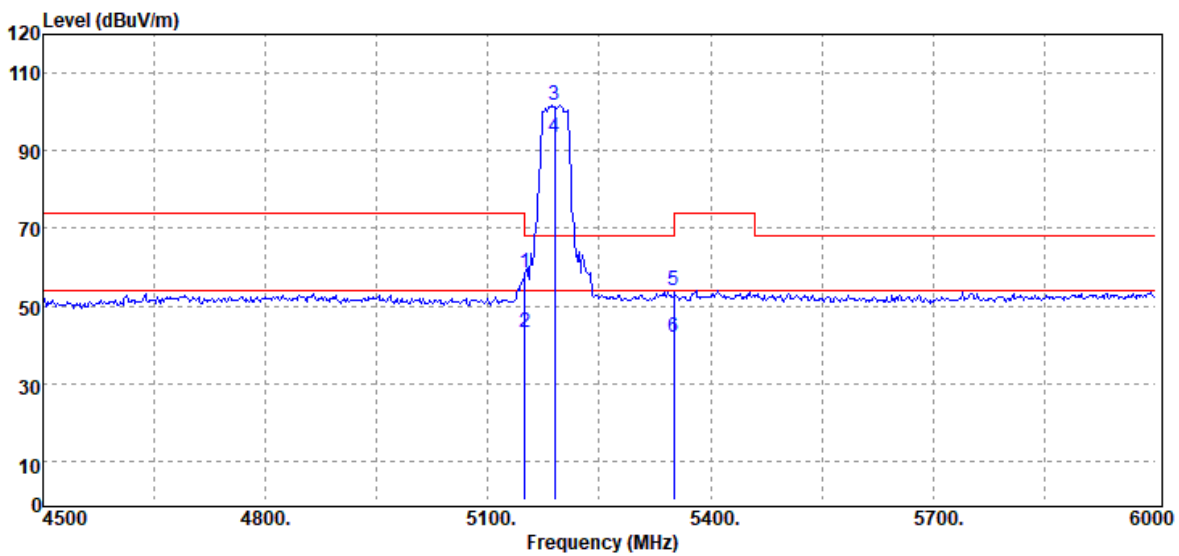

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.50	Peak	39.49	19.00	58.49	74.00	-15.51
5149.50	Average	24.30	19.00	43.30	54.00	-10.70
5190.00	Peak	82.64	19.26	101.90	--	--
5190.00	Average	74.05	19.26	93.31	--	--
5350.00	Peak	34.24	19.82	54.06	74.00	-19.94
5350.00	Average	21.92	19.82	41.74	54.00	-12.26


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

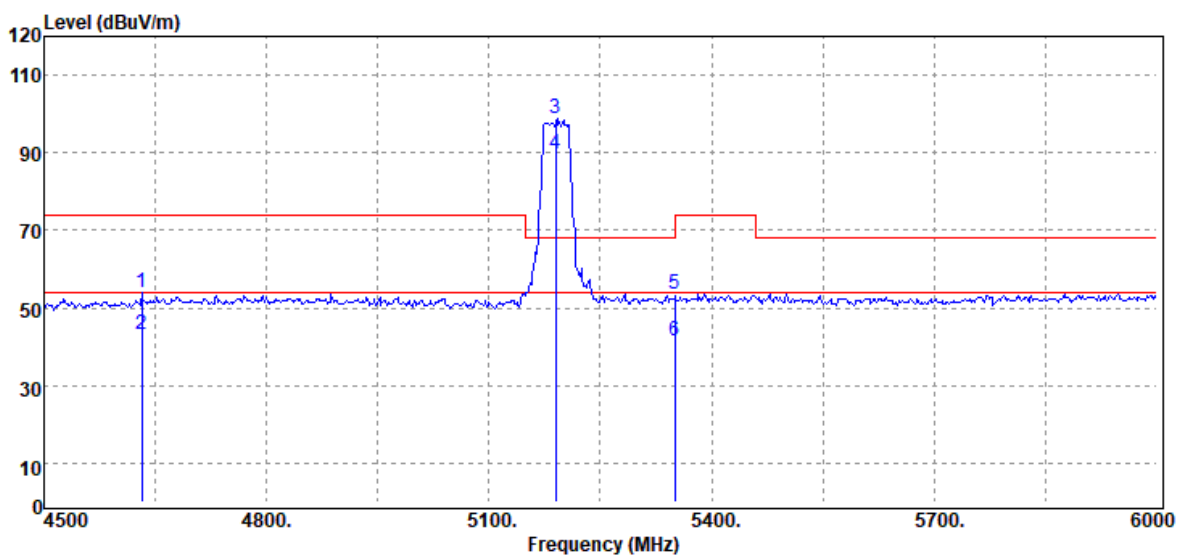

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4632.00	Peak	35.73	18.34	54.07	74.00	-19.93
4632.00	Average	24.65	18.34	42.99	54.00	-11.01
5190.00	Peak	79.39	19.26	98.65	--	--
5190.00	Average	70.59	19.26	89.85	--	--
5350.00	Peak	33.81	19.82	53.63	74.00	-20.37
5350.00	Average	21.61	19.82	41.43	54.00	-12.57


Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

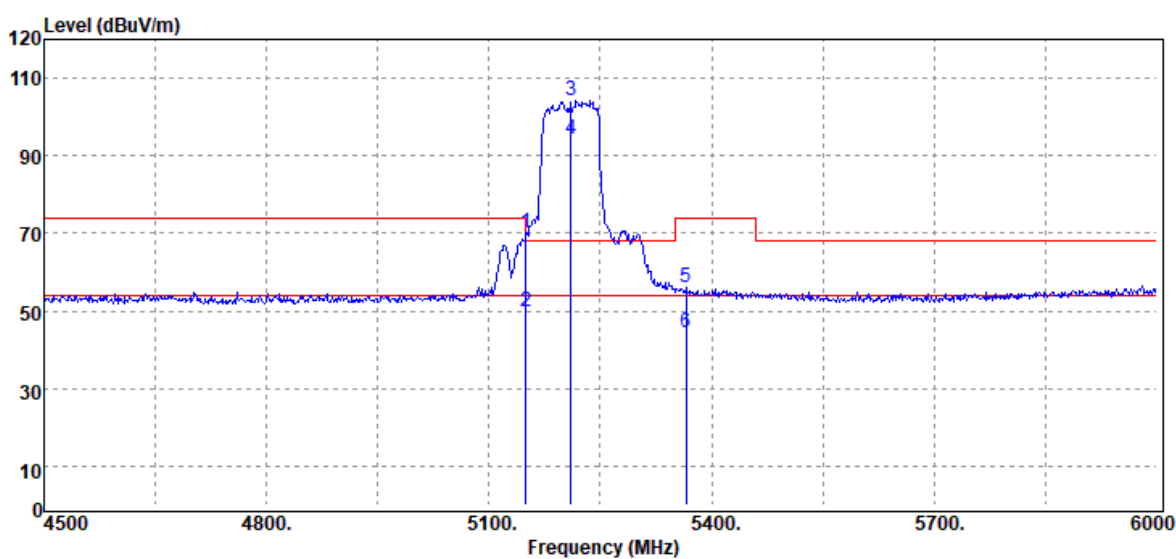

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.50	Peak	51.04	19.00	70.04	74.00	-3.96
5149.50	Average	30.72	19.00	49.72	54.00	-4.28
5210.00	Peak	85.01	19.39	104.40	--	--
5210.00	Average	74.96	19.39	94.35	--	--
5365.50	Peak	36.27	19.89	56.16	74.00	-17.84
5365.50	Average	24.33	19.89	44.22	54.00	-9.78

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

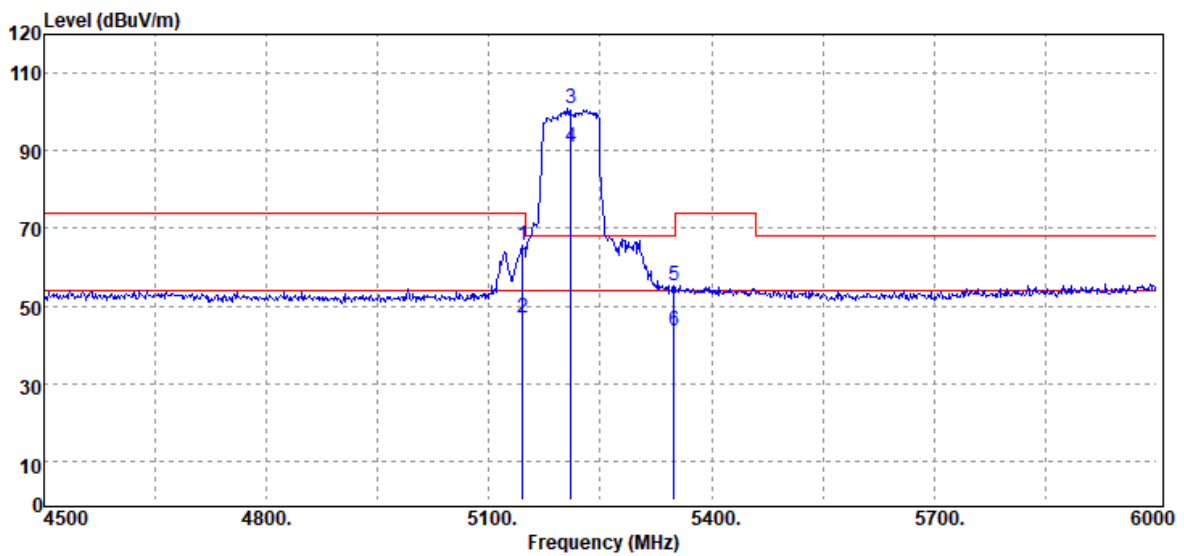

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5145.00	Peak	46.63	18.98	65.61	74.00	-8.39
5145.00	Average	28.01	18.98	46.99	54.00	-7.01
5210.00	Peak	81.32	19.39	100.71	--	--
5210.00	Average	71.53	19.39	90.92	--	--
5349.00	Peak	35.58	19.82	55.40	68.20	-12.80
5349.00	Average	23.63	19.82	43.45	54.00	-10.55

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

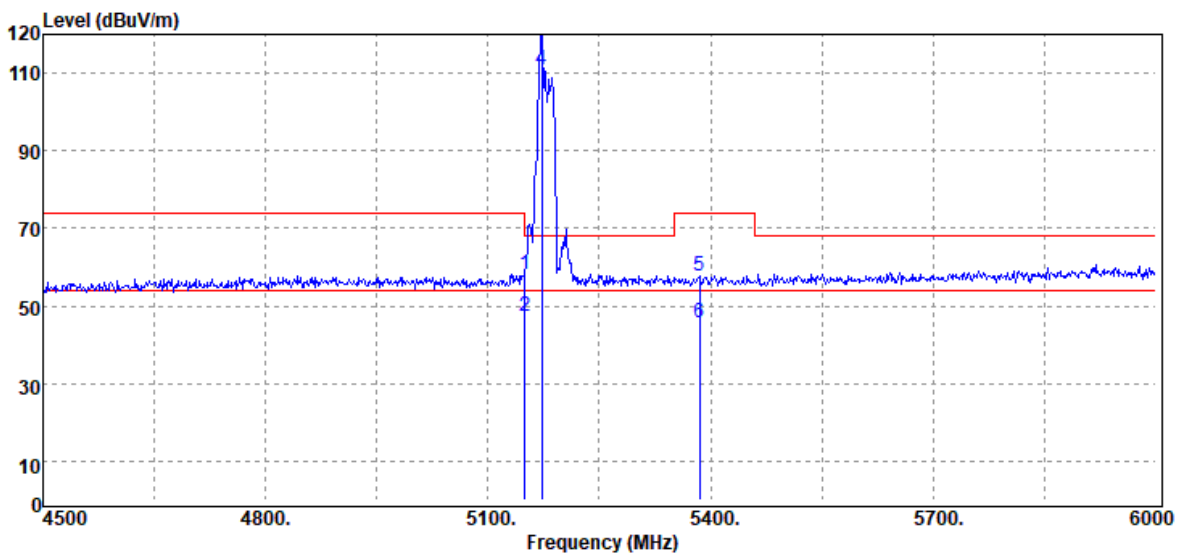

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5149.50	Peak	39.14	19.00	58.14	74.00	-15.86
5149.50	Average	28.16	19.00	47.16	54.00	-6.84
5172.00	Peak	102.51	19.14	121.65	--	--
5172.00	Average	91.75	19.14	110.89	--	--
5385.00	Peak	37.80	19.99	57.79	74.00	-16.21
5385.00	Average	25.83	19.99	45.82	54.00	-8.18

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

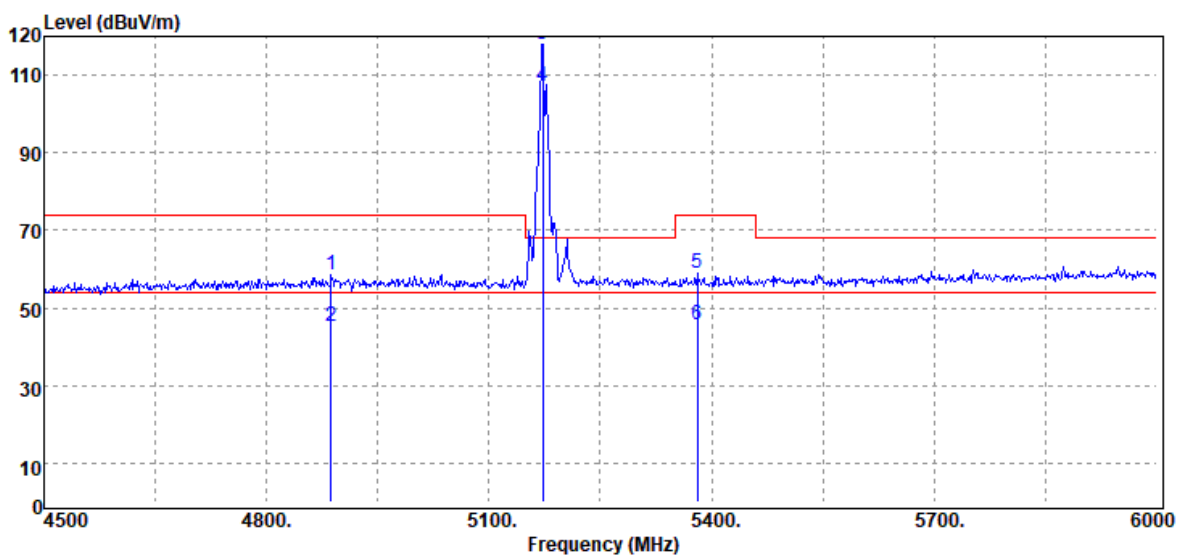

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4887.00	Peak	40.15	18.59	58.74	74.00	-15.26
4887.00	Average	26.82	18.59	45.41	54.00	-8.59
5172.00	Peak	98.74	19.14	117.88	--	--
5172.00	Average	87.79	19.14	106.93	--	--
5380.50	Peak	39.03	19.97	59.00	74.00	-15.00
5380.50	Average	25.84	19.97	45.81	54.00	-8.19

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

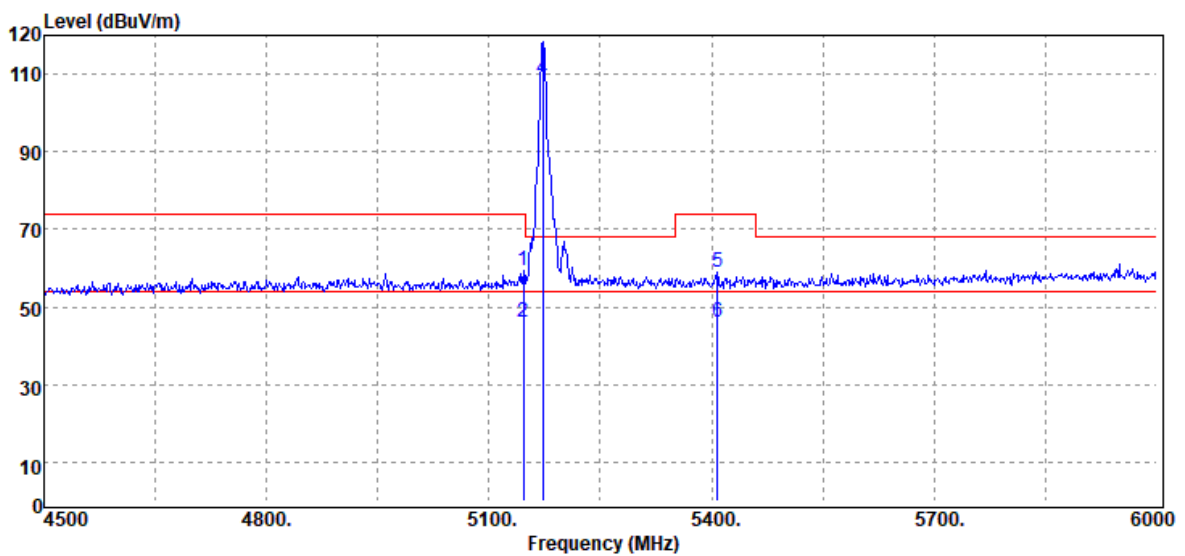

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5146.50	Peak	40.32	18.99	59.31	74.00	-14.69
5146.50	Average	27.23	18.99	46.22	54.00	-7.78
5172.00	Peak	99.09	19.14	118.23	--	--
5172.00	Average	89.64	19.14	108.78	--	--
5407.50	Peak	38.82	20.06	58.88	74.00	-15.12
5407.50	Average	25.92	20.06	45.98	54.00	-8.02

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

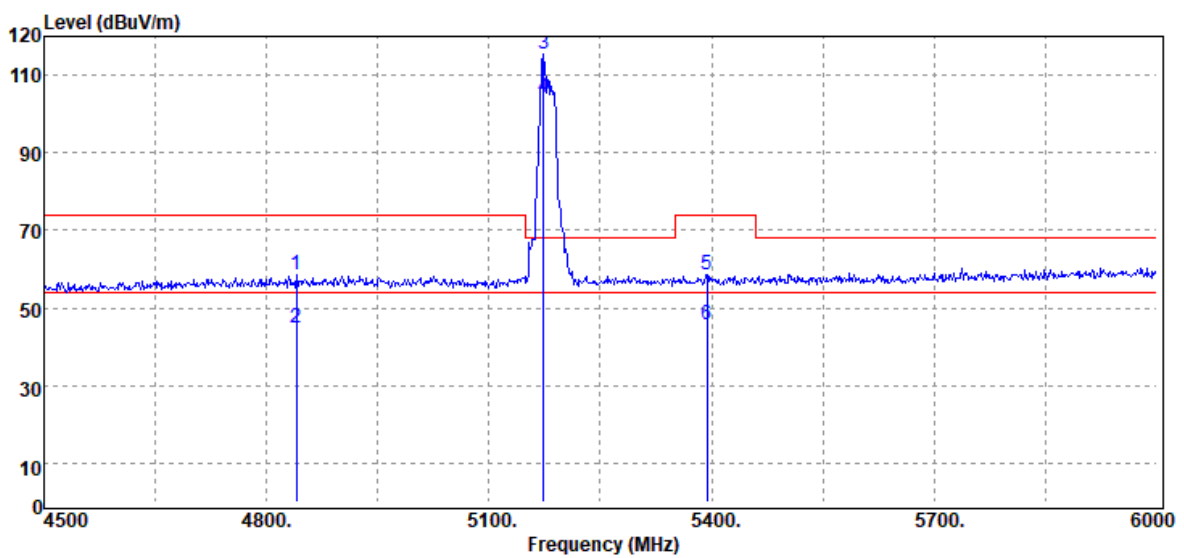

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4840.50	Peak	39.82	18.58	58.40	74.00	-15.60
4840.50	Average	26.38	18.58	44.96	54.00	-9.04
5173.50	Peak	96.22	19.14	115.36	--	--
5173.50	Average	85.04	19.14	104.18	--	--
5394.00	Peak	38.44	20.04	58.48	74.00	-15.52
5394.00	Average	25.80	20.04	45.84	54.00	-8.16

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

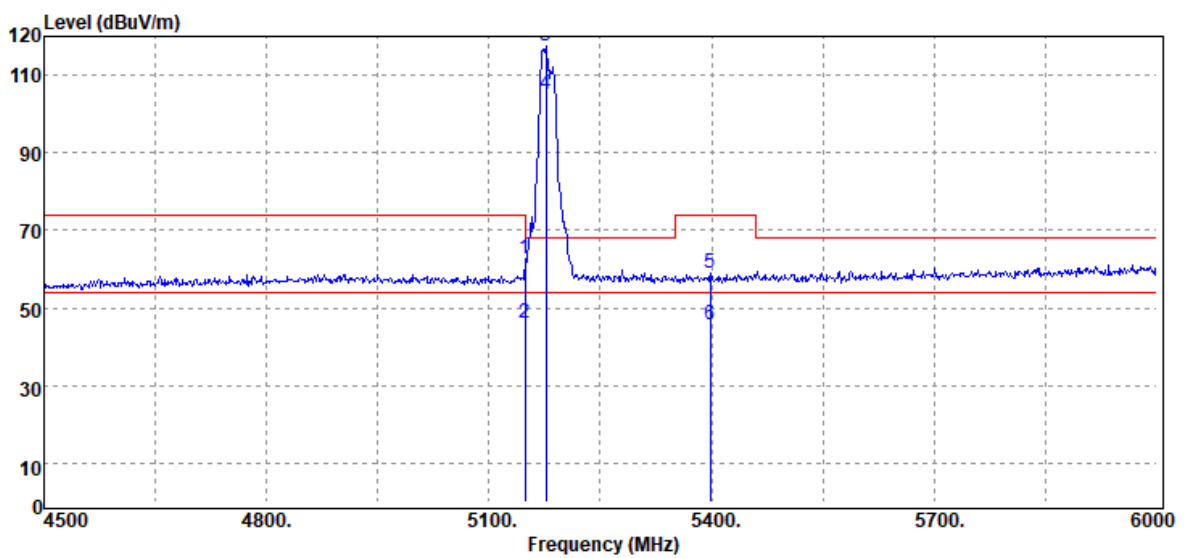

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5148.00	Peak	43.56	19.00	62.56	74.00	-11.44
5148.00	Average	27.21	19.00	46.21	54.00	-7.79
5176.50	Peak	98.34	19.18	117.52	--	--
5176.50	Average	85.94	19.18	105.12	--	--
5398.50	Peak	38.77	20.05	58.82	74.00	-15.18
5398.50	Average	25.75	20.05	45.80	54.00	-8.20

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

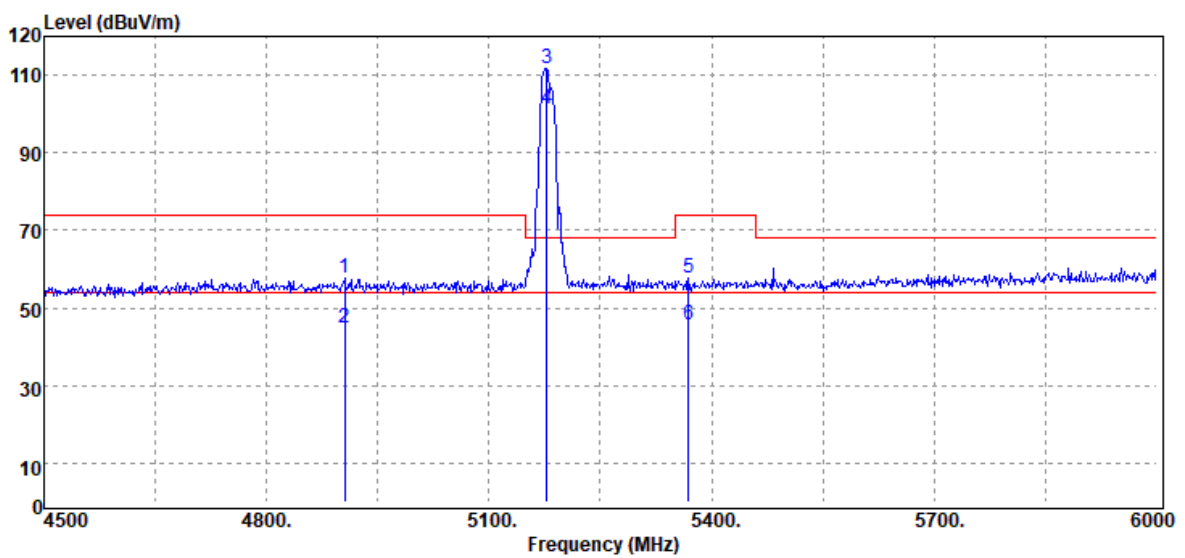

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4905.00	Peak	39.09	18.59	57.68	74.00	-16.32
4905.00	Average	26.38	18.59	44.97	54.00	-9.03
5178.00	Peak	92.71	19.18	111.89	--	--
5178.00	Average	82.16	19.18	101.34	--	--
5368.50	Peak	37.70	19.90	57.60	74.00	-16.40
5368.50	Average	25.76	19.90	45.66	54.00	-8.34

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5190 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

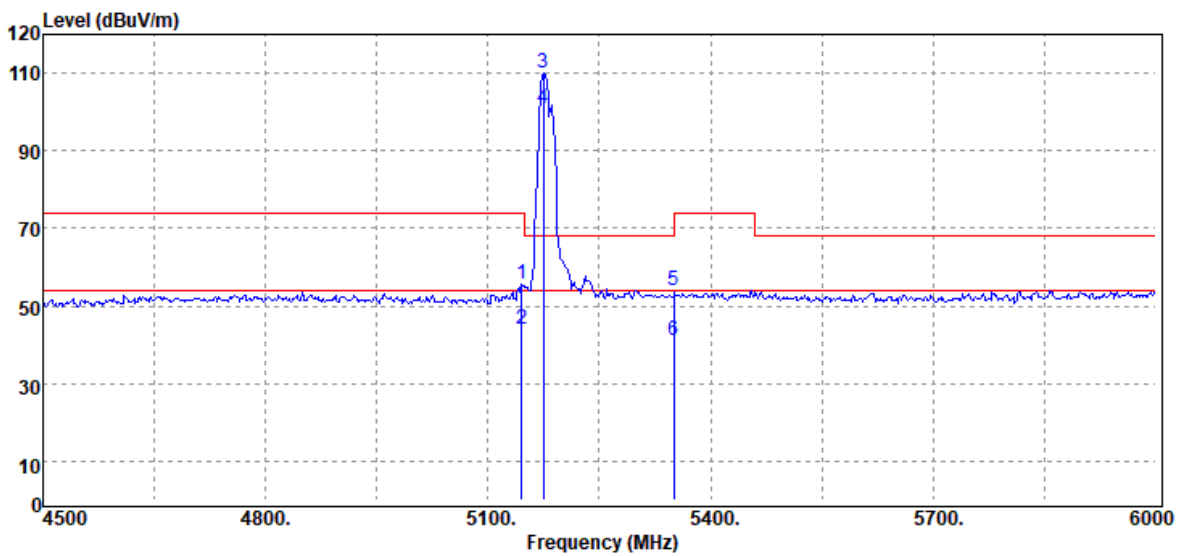

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5145.00	Peak	36.76	18.98	55.74	74.00	-18.26
5145.00	Average	25.08	18.98	44.06	54.00	-9.94
5175.00	Peak	90.89	19.15	110.04	-	-
5175.00	Average	81.60	19.15	100.75	-	-
5350.00	Peak	34.04	19.82	53.86	74.00	-20.14
5350.00	Average	21.37	19.82	41.19	54.00	-12.81

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5190 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

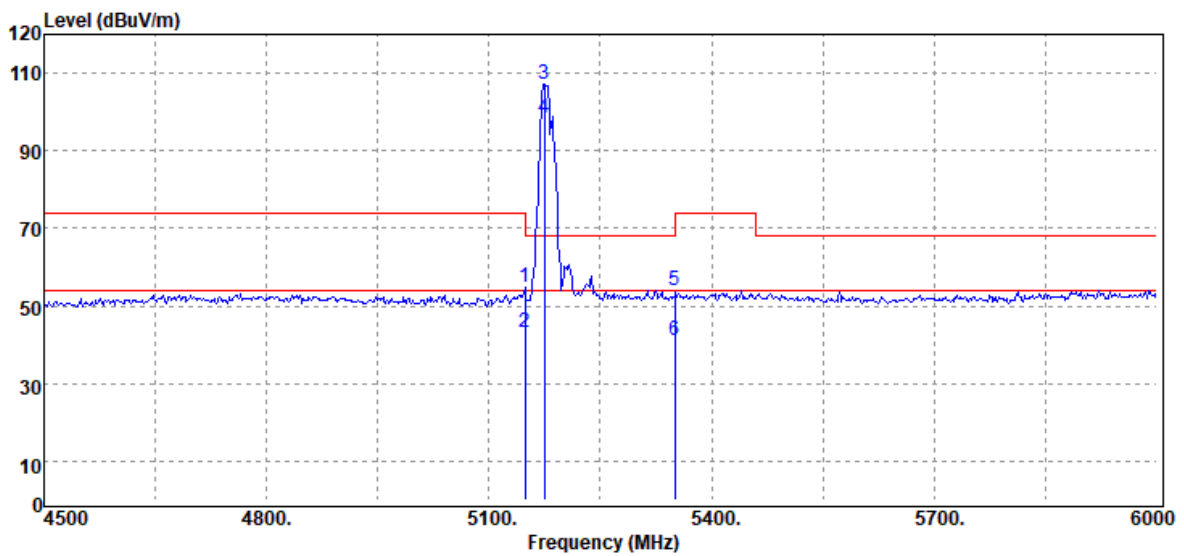

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5148.00	Peak	35.80	19.00	54.80	74.00	-19.20
5148.00	Average	24.36	19.00	43.36	54.00	-10.64
5175.00	Peak	87.80	19.15	106.95	-	-
5175.00	Average	79.08	19.15	98.23	-	-
5350.00	Peak	33.99	19.82	53.81	74.00	-20.19
5350.00	Average	21.13	19.82	40.95	54.00	-13.05

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5210 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

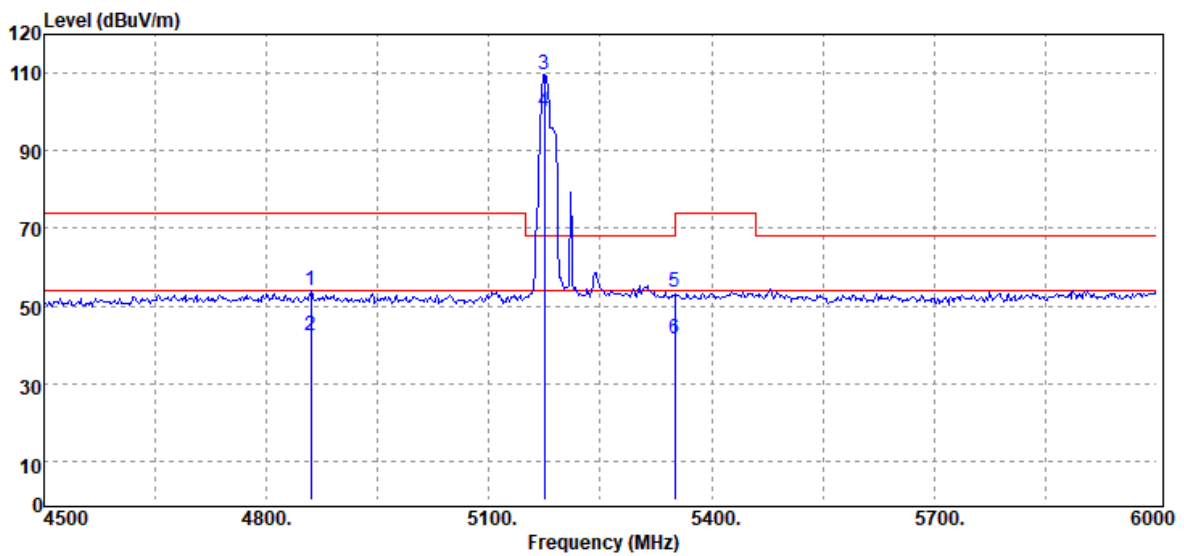

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4860.00	Peak	35.39	18.61	54.00	74.00	-20.00
4860.00	Average	23.71	18.61	42.32	54.00	-11.68
5175.00	Peak	90.51	19.15	109.66	-	-
5175.00	Average	80.93	19.15	100.08	-	-
5350.00	Peak	33.58	19.82	53.40	74.00	-20.60
5350.00	Average	21.55	19.82	41.37	54.00	-12.63

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5210 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

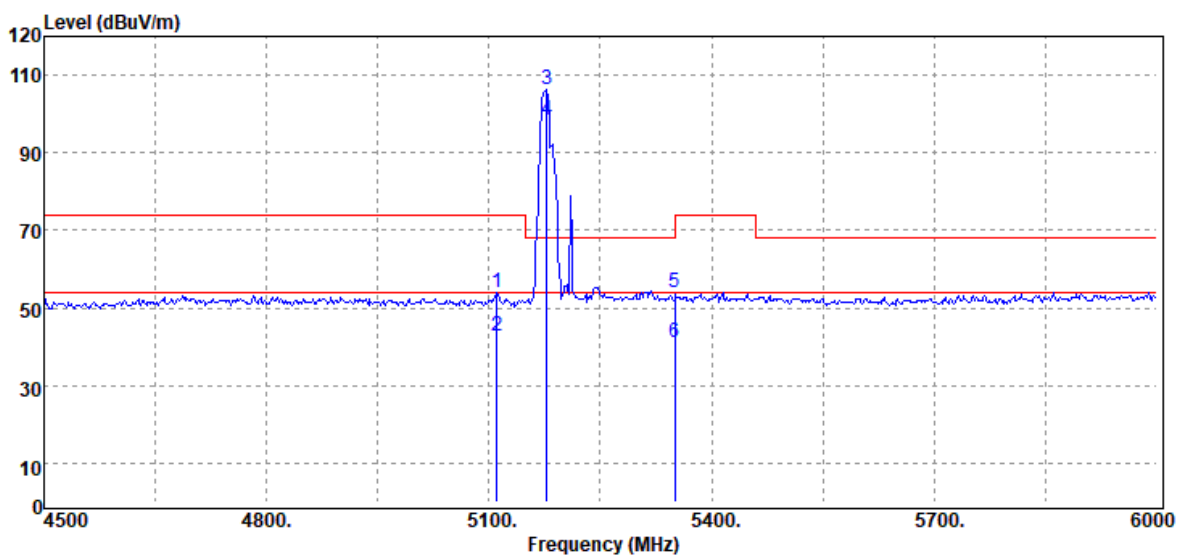

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5110.50	Peak	35.19	18.87	54.06	74.00	-19.94
5110.50	Average	23.77	18.87	42.64	54.00	-11.36
5178.00	Peak	86.92	19.18	106.10	-	-
5178.00	Average	79.08	19.18	98.26	-	-
5350.00	Peak	34.05	19.82	53.87	74.00	-20.13
5350.00	Average	21.34	19.82	41.16	54.00	-12.84

Test Data for UNII-2a


Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

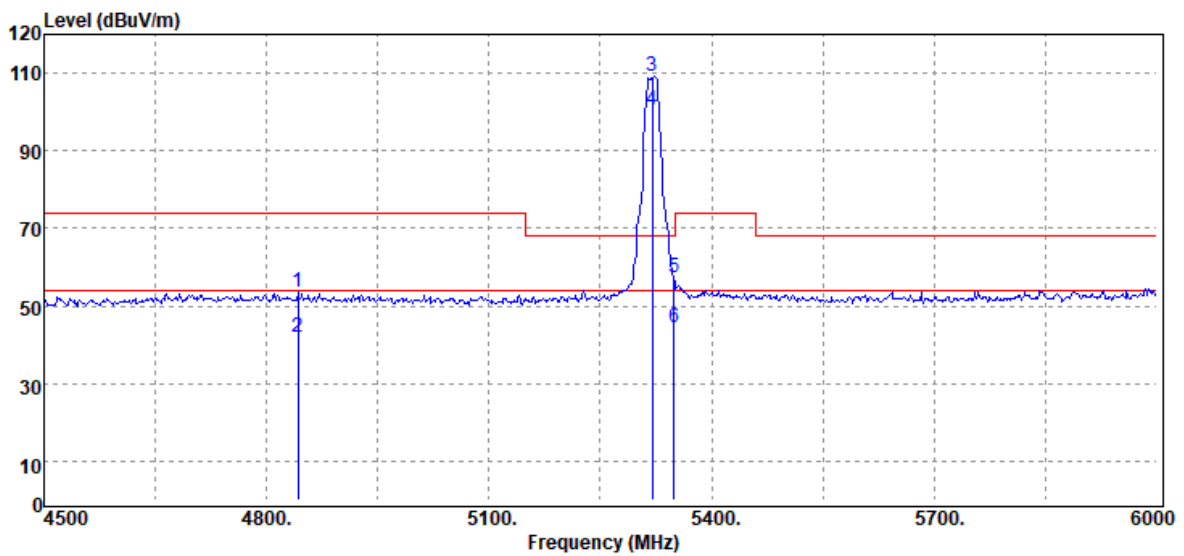

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4842.00	Peak	34.97	18.58	53.55	74.00	-20.45
4842.00	Average	23.25	18.58	41.83	54.00	-12.17
5320.00	Peak	89.43	19.81	109.24	--	--
5320.00	Average	80.63	19.81	100.44	--	--
5349.00	Peak	37.68	19.82	57.50	68.20	-10.70
5349.00	Average	24.56	19.82	44.38	54.00	-9.62

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

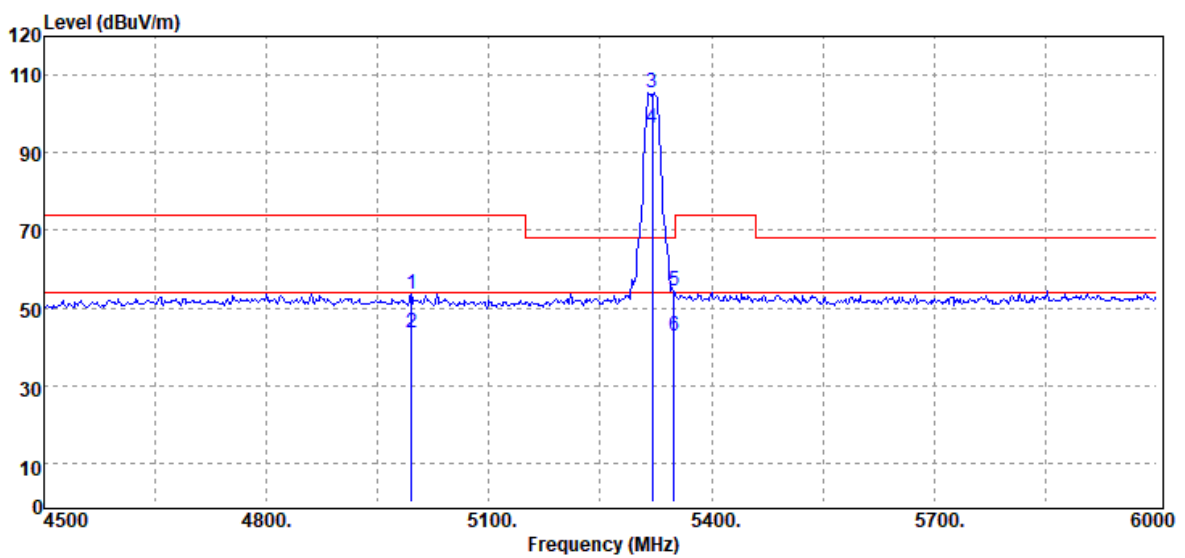

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4995.00	Peak	34.86	18.81	53.67	74.00	-20.33
4995.00	Average	24.84	18.81	43.65	54.00	-10.35
5320.00	Peak	85.52	19.81	105.33	--	--
5320.00	Average	76.51	19.81	96.32	--	--
5349.00	Peak	34.76	19.82	54.58	68.20	-13.62
5349.00	Average	22.94	19.82	42.76	54.00	-11.24

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

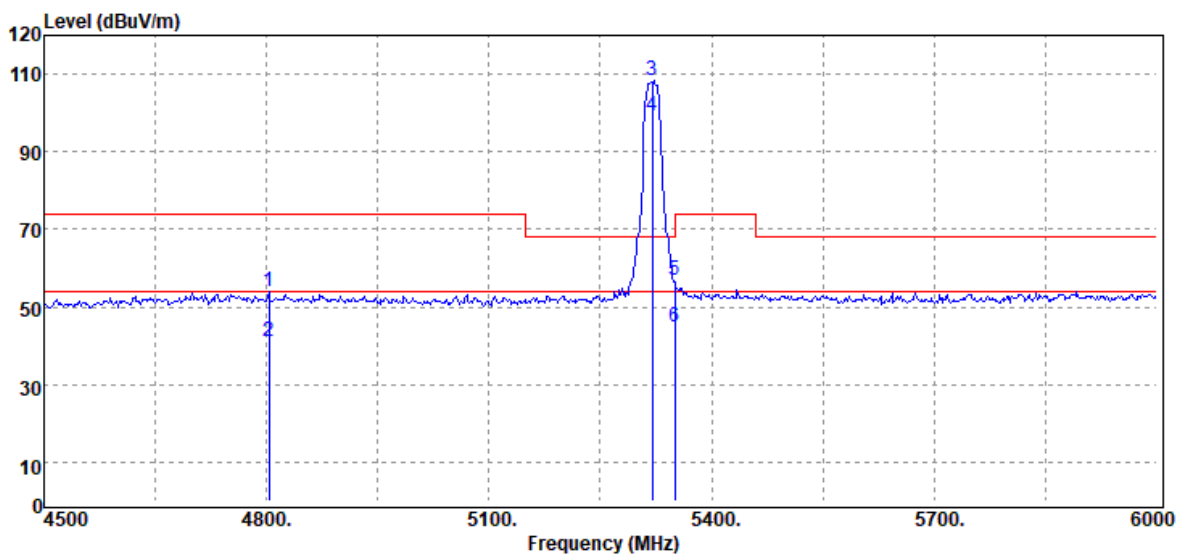

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4803.00	Peak	35.34	18.46	53.80	74.00	-20.20
4803.00	Average	22.60	18.46	41.06	54.00	-12.94
5320.00	Peak	88.53	19.81	108.34	--	--
5320.00	Average	79.33	19.81	99.14	--	--
5350.00	Peak	36.86	19.82	56.68	74.00	-17.32
5350.00	Average	25.23	19.82	45.05	54.00	-8.95


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

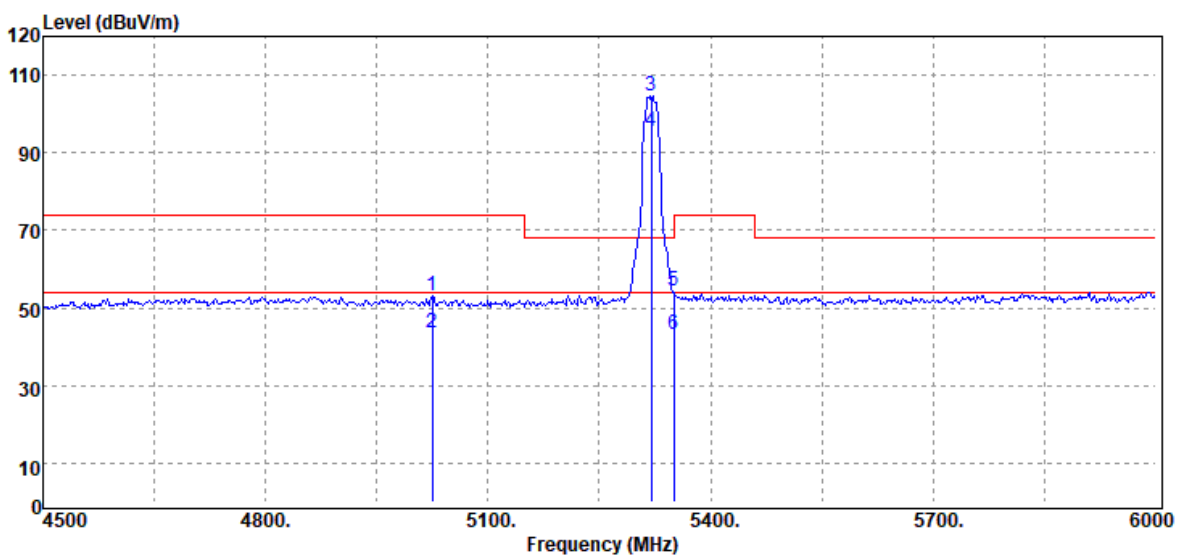


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5025.00	Peak	34.17	18.86	53.03	74.00	-20.97
5025.00	Average	24.80	18.86	43.66	54.00	-10.34
5320.00	Peak	84.70	19.81	104.51	--	--
5320.00	Average	75.50	19.81	95.31	--	--
5350.00	Peak	34.56	19.82	54.38	74.00	-19.62
5350.00	Average	23.44	19.82	43.26	54.00	-10.74

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

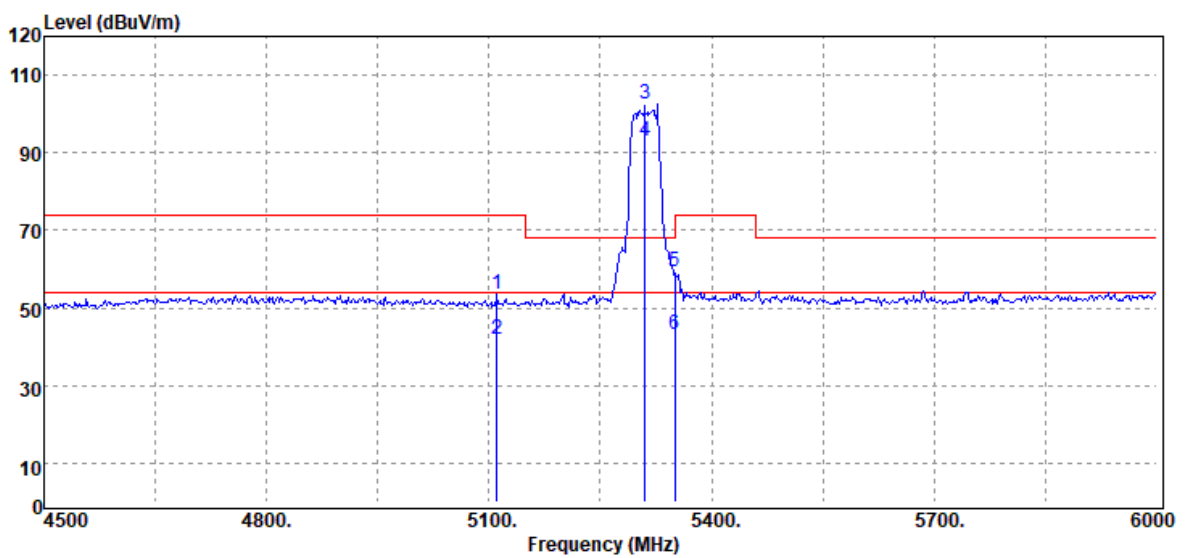

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5110.50	Peak	34.61	18.87	53.48	74.00	-20.52
5110.50	Average	23.26	18.87	42.13	54.00	-11.87
5310.00	Peak	82.59	19.82	102.41	--	--
5310.00	Average	73.23	19.82	93.05	--	--
5350.00	Peak	39.45	19.82	59.27	74.00	-14.73
5350.00	Average	23.20	19.82	43.02	54.00	-10.98


Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

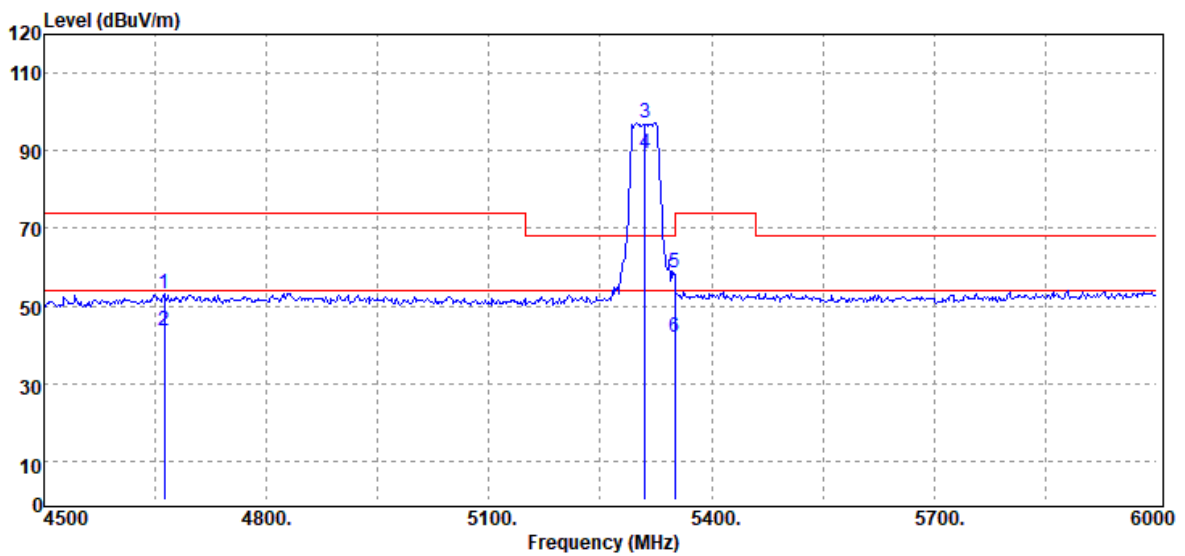

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4662.00	Peak	34.86	18.42	53.28	74.00	-20.72
4662.00	Average	25.26	18.42	43.68	54.00	-10.32
5310.00	Peak	77.45	19.82	97.27	--	--
5310.00	Average	69.60	19.82	89.42	--	--
5350.00	Peak	38.58	19.82	58.40	74.00	-15.60
5350.00	Average	22.10	19.82	41.92	54.00	-12.08

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

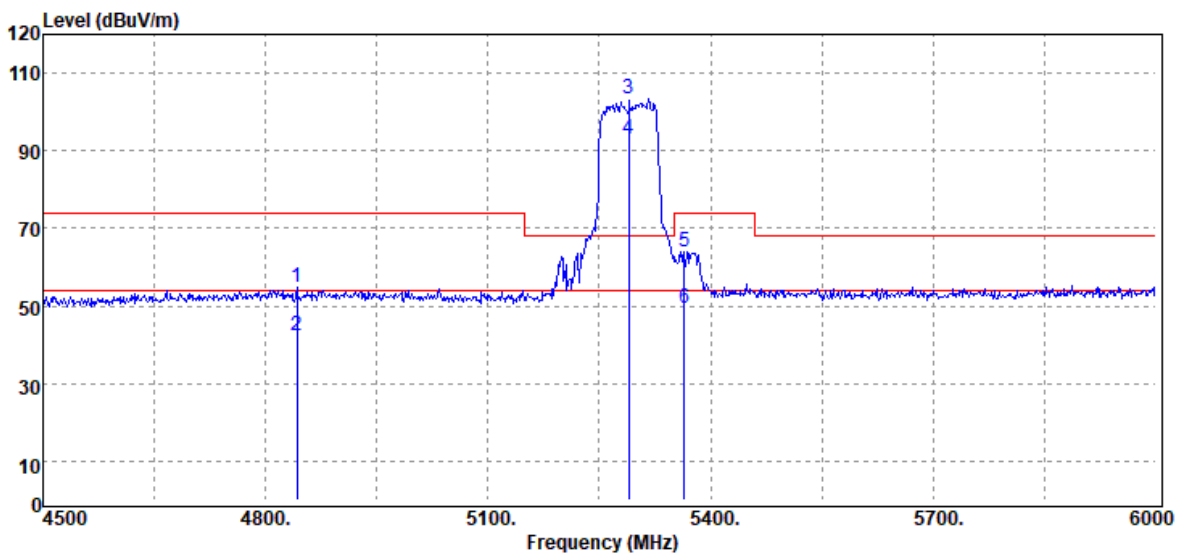

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4842.00	Peak	36.18	18.58	54.76	74.00	-19.24
4842.00	Average	23.92	18.58	42.50	54.00	-11.50
5290.00	Peak	83.46	19.78	103.24	--	--
5290.00	Average	73.11	19.78	92.89	--	--
5364.00	Peak	44.26	19.89	64.15	74.00	-9.85
5364.00	Average	29.50	19.89	49.39	54.00	-4.61

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

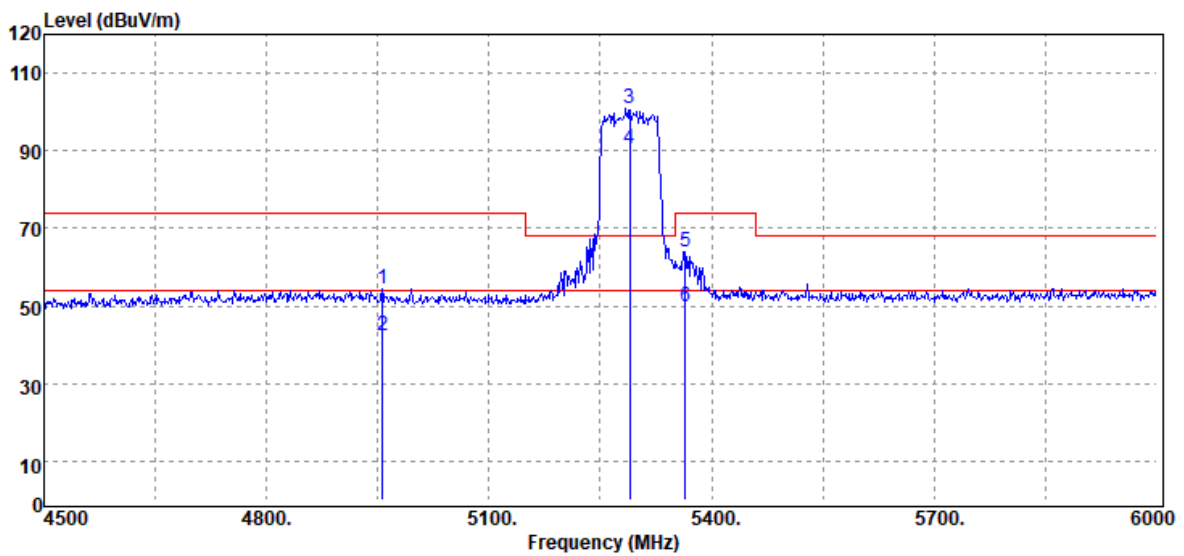

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4956.00	Peak	35.78	18.69	54.47	74.00	-19.53
4956.00	Average	23.83	18.69	42.52	54.00	-11.48
5290.00	Peak	80.98	19.78	100.76	--	--
5290.00	Average	70.80	19.78	90.58	--	--
5364.00	Peak	44.15	19.89	64.04	74.00	-9.96
5364.00	Average	30.03	19.89	49.92	54.00	-4.08

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

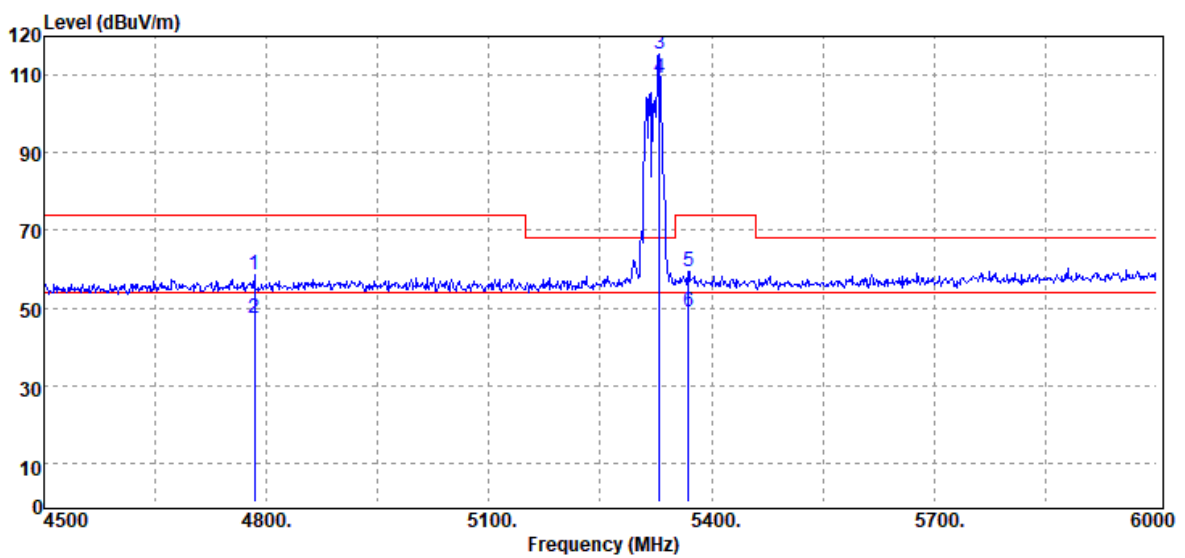

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4783.50	Peak	39.92	18.46	58.38	74.00	-15.62
4783.50	Average	28.90	18.46	47.36	54.00	-6.64
5329.50	Peak	95.43	19.82	115.25	--	--
5329.50	Average	89.20	19.82	109.02	--	--
5368.50	Peak	39.51	19.90	59.41	74.00	-14.59
5368.50	Average	29.17	19.90	49.07	54.00	-4.93

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

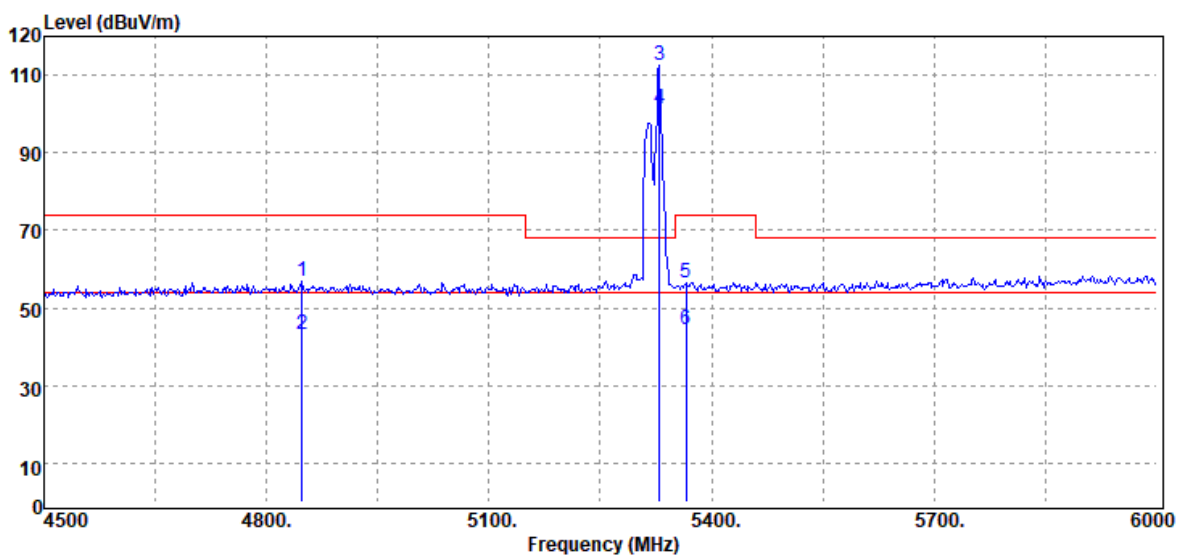

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4848.00	Peak	38.18	18.61	56.79	74.00	-17.21
4848.00	Average	24.53	18.61	43.14	54.00	-10.86
5329.50	Peak	92.50	19.82	112.32	--	--
5329.50	Average	81.66	19.82	101.48	--	--
5365.50	Peak	36.67	19.89	56.56	74.00	-17.44
5365.50	Average	24.72	19.89	44.61	54.00	-9.39

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

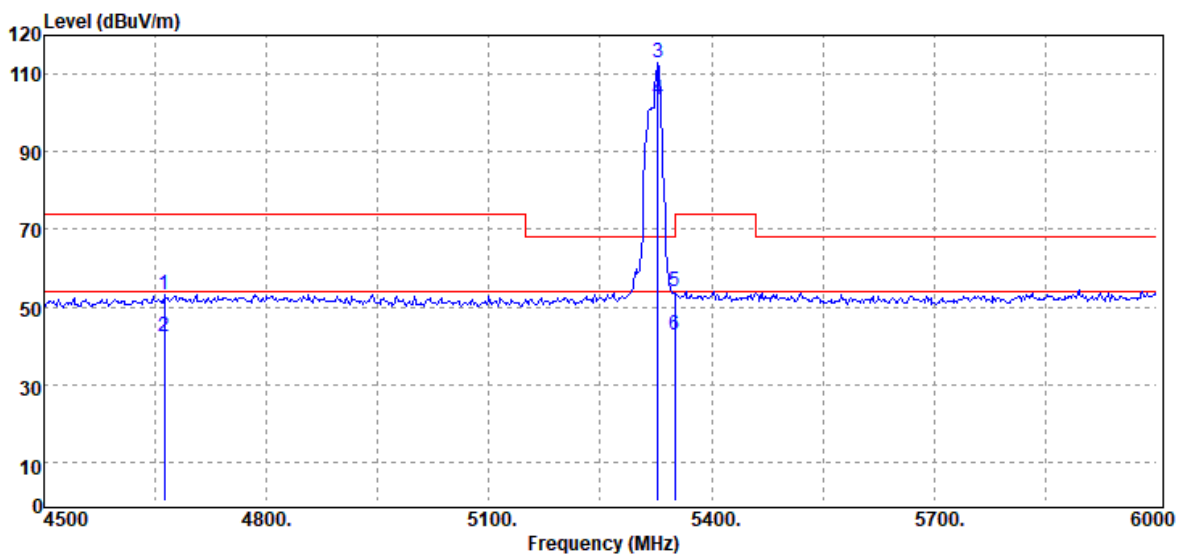

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4662.00	Peak	34.80	18.42	53.22	74.00	-20.78
4662.00	Average	23.75	18.42	42.17	54.00	-11.83
5328.00	Peak	92.99	19.81	112.80	--	--
5328.00	Average	83.72	19.81	103.53	--	--
5350.00	Peak	34.03	19.82	53.85	74.00	-20.15
5350.00	Average	22.90	19.82	42.72	54.00	-11.28

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

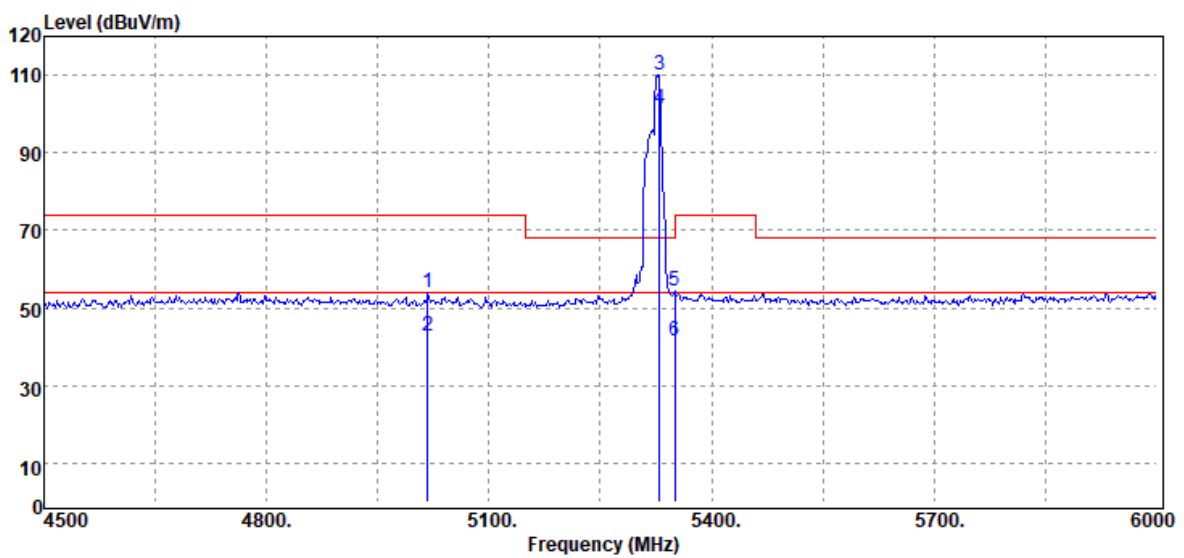

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5017.50	Peak	35.09	18.84	53.93	74.00	-20.07
5017.50	Average	24.10	18.84	42.94	54.00	-11.06
5329.50	Peak	90.22	19.82	110.04	--	--
5329.50	Average	81.42	19.82	101.24	--	--
5350.00	Peak	34.53	19.82	54.35	74.00	-19.65
5350.00	Average	21.81	19.82	41.63	54.00	-12.37

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

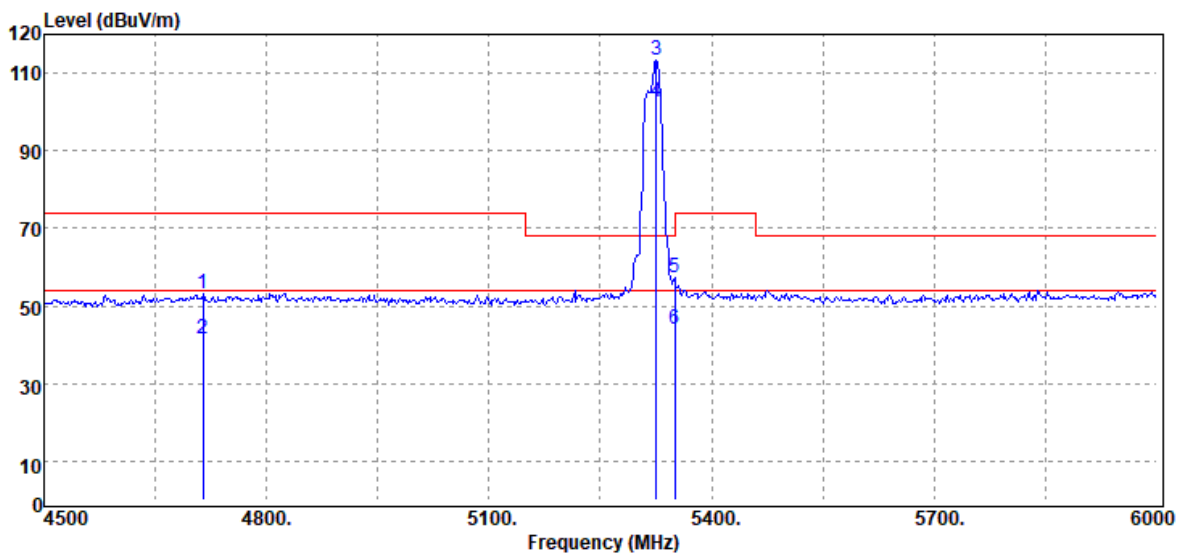

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4714.50	Peak	34.86	18.47	53.33	74.00	-20.67
4714.50	Average	23.24	18.47	41.71	54.00	-12.29
5325.00	Peak	93.72	19.81	113.53	--	--
5325.00	Average	82.94	19.81	102.75	--	--
5350.00	Peak	37.49	19.82	57.31	74.00	-16.69
5350.00	Average	24.04	19.82	43.86	54.00	-10.14

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

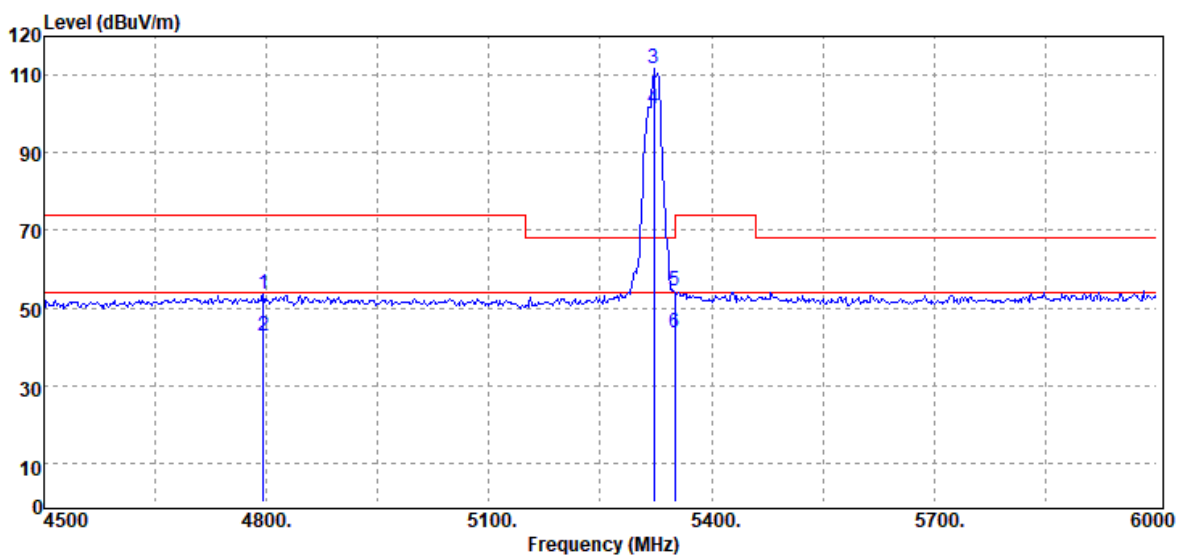

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4795.50	Peak	34.97	18.46	53.43	74.00	-20.57
4795.50	Average	24.43	18.46	42.89	54.00	-11.11
5322.00	Peak	91.74	19.82	111.56	--	--
5322.00	Average	81.51	19.82	101.33	--	--
5350.00	Peak	34.43	19.82	54.25	74.00	-19.75
5350.00	Average	23.59	19.82	43.41	54.00	-10.59

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

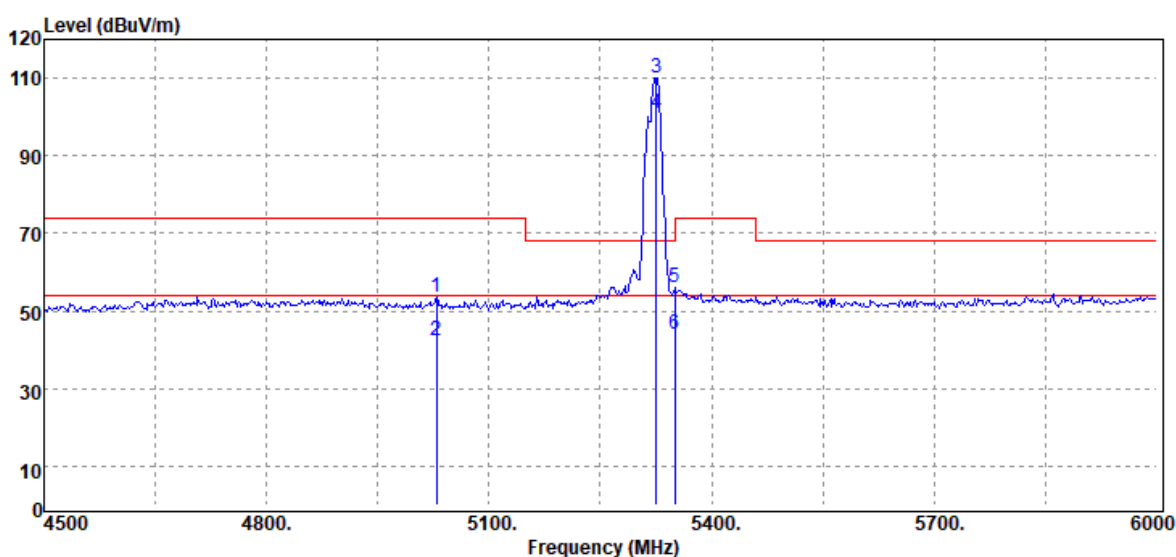

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5029.50	Peak	34.82	18.86	53.68	74.00	-20.32
5029.50	Average	23.51	18.86	42.37	54.00	-11.63
5325.00	Peak	90.40	19.81	110.21	-	-
5325.00	Average	81.11	19.81	100.92	-	-
5350.00	Peak	36.07	19.82	55.89	74.00	-18.11
5350.00	Average	24.23	19.82	44.05	54.00	-9.95

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

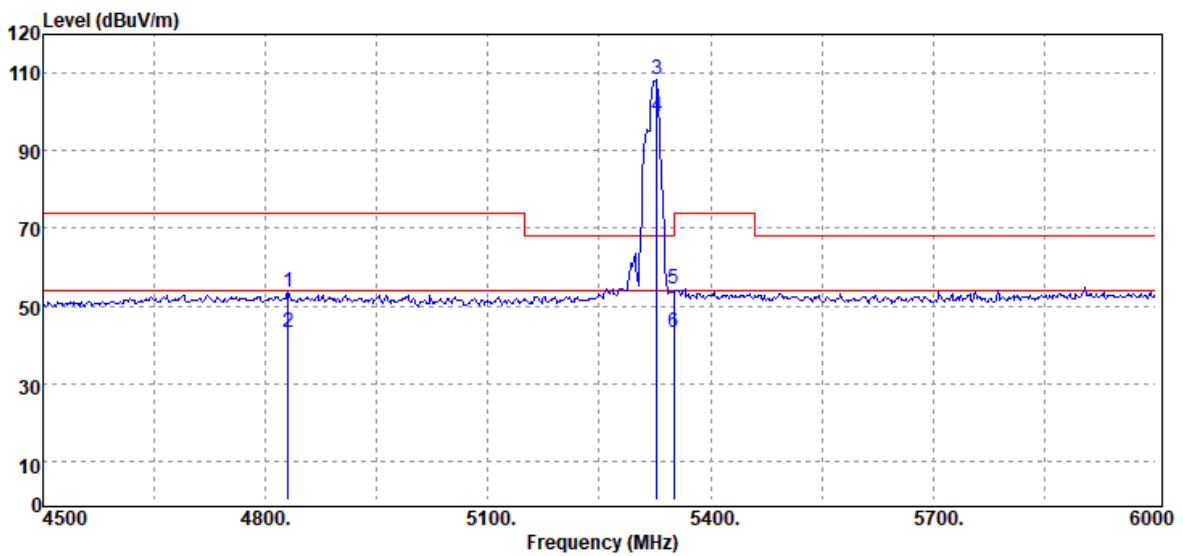

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4830.00	Peak	35.07	18.54	53.61	74.00	-20.39
4830.00	Average	24.52	18.54	43.06	54.00	-10.94
5328.00	Peak	88.39	19.81	108.20	-	-
5328.00	Average	79.16	19.81	98.97	-	-
5350.00	Peak	34.48	19.82	54.30	74.00	-19.70
5350.00	Average	23.53	19.82	43.35	54.00	-10.65


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

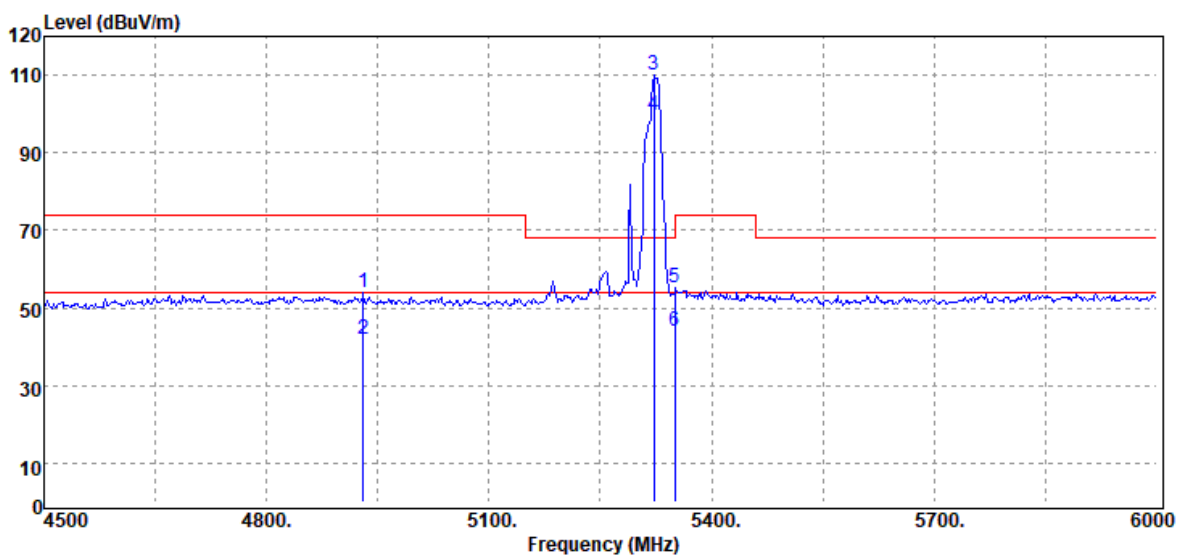

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4930.50	Peak	35.46	18.64	54.10	74.00	-19.90
4930.50	Average	23.26	18.64	41.90	54.00	-12.10
5322.00	Peak	90.29	19.82	110.11	-	-
5322.00	Average	79.95	19.82	99.77	-	-
5350.00	Peak	35.36	19.82	55.18	74.00	-18.82
5350.00	Average	24.40	19.82	44.22	54.00	-9.78

Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

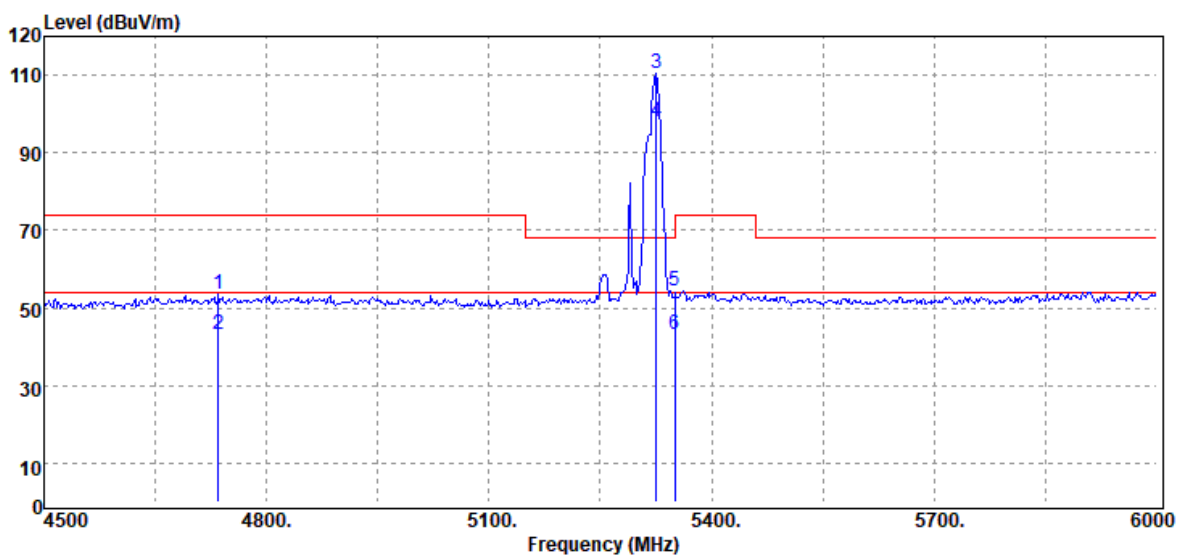


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4735.50	Peak	35.23	18.48	53.71	74.00	-20.29
4735.50	Average	24.88	18.48	43.36	54.00	-10.64
5325.00	Peak	90.79	19.81	110.60	-	-
5325.00	Average	78.36	19.81	98.17	-	-
5350.00	Peak	34.77	19.82	54.59	74.00	-19.41
5350.00	Average	23.39	19.82	43.21	54.00	-10.79

Report No.: T210319W02-RP2

Test Data for UNII-2c


Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

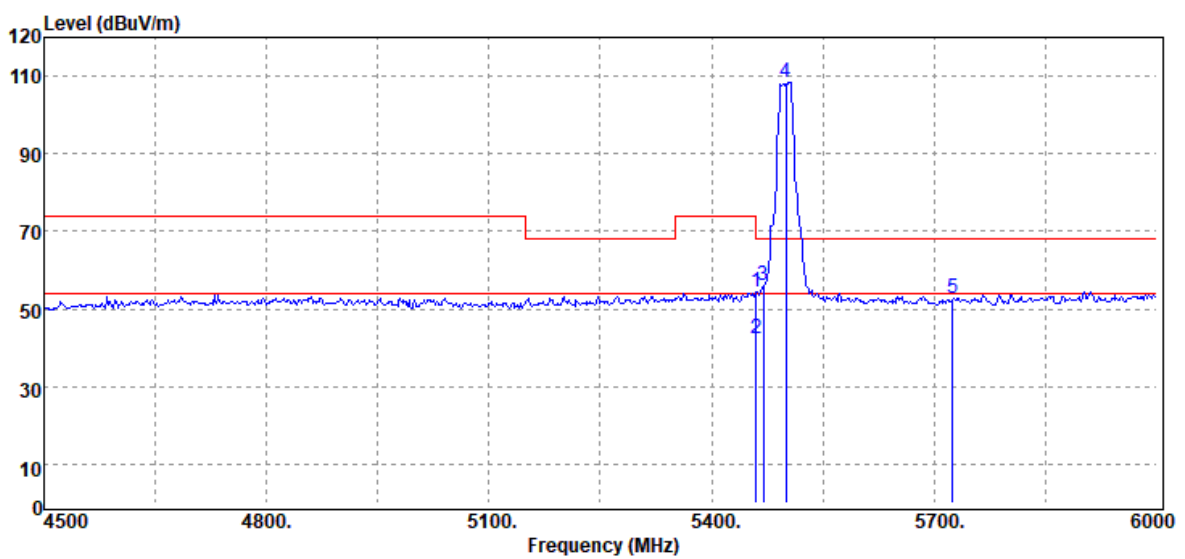

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5460.00	Peak	34.27	20.06	54.33	74.00	-19.67
5460.00	Average	22.48	20.06	42.54	54.00	-11.46
5470.00	Peak	36.11	20.05	56.16	68.20	-12.04
5500.00	Peak	88.36	20.02	108.38	--	--
5725.00	Peak	32.41	20.31	52.72	68.20	-15.48

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.1(°C) / 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

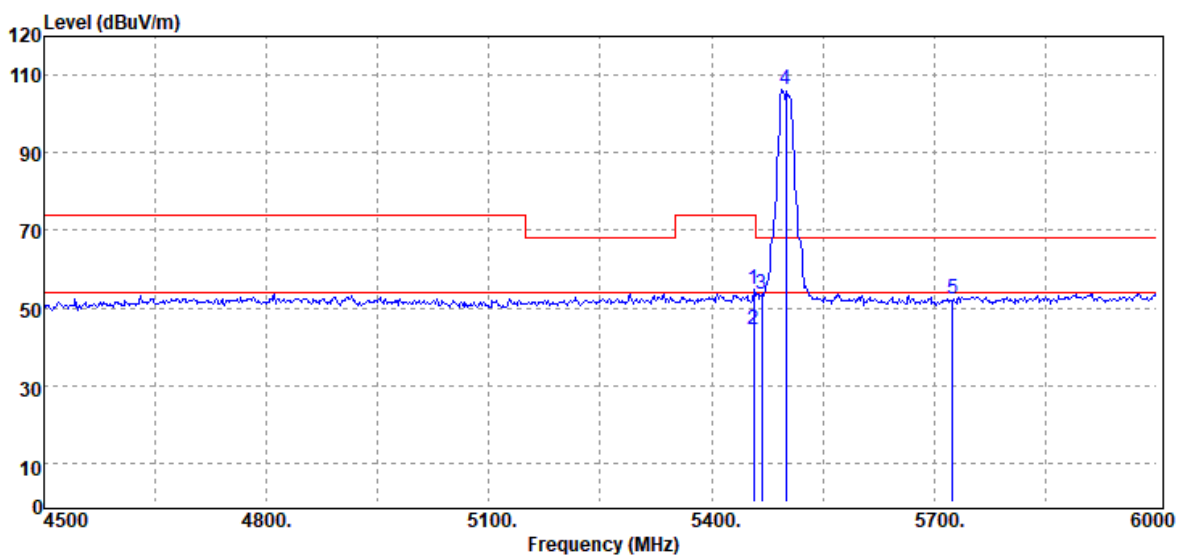

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.00	Peak	34.58	20.07	54.65	74.00	-19.35
5457.00	Average	24.52	20.07	44.59	54.00	-9.41
5467.50	Peak	33.69	20.06	53.75	68.20	-14.45
5500.00	Peak	86.32	20.02	106.34	--	--
5725.00	Peak	31.94	20.31	52.25	68.20	-15.95

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

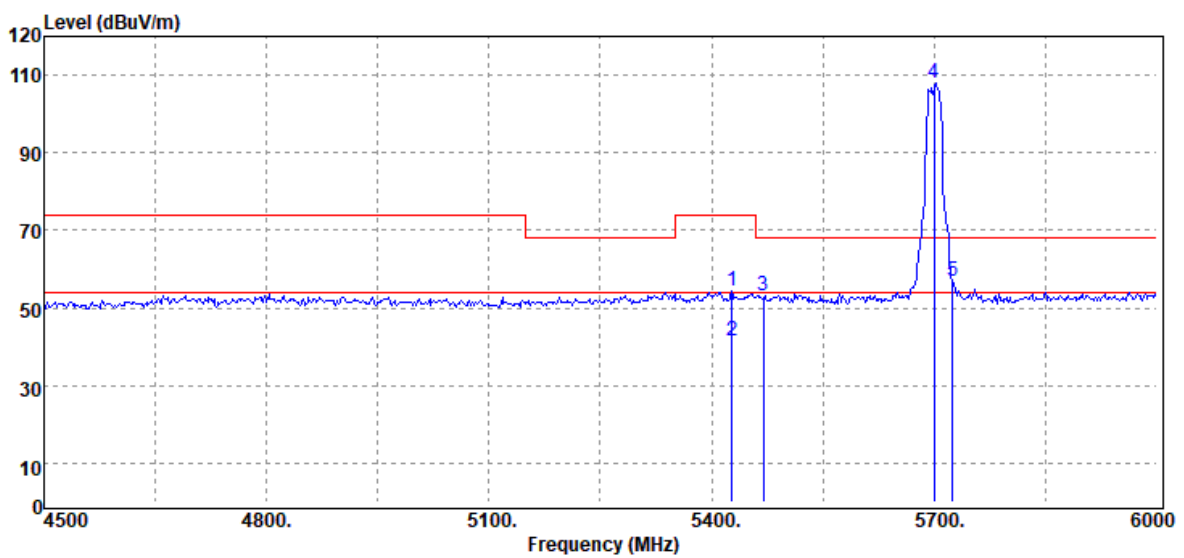

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5427.00	Peak	34.34	20.07	54.41	74.00	-19.59
5427.00	Average	21.32	20.07	41.39	54.00	-12.61
5470.00	Peak	33.20	20.05	53.25	68.20	-14.95
5700.00	Peak	87.60	20.16	107.76	--	--
5725.00	Peak	36.60	20.31	56.91	68.20	-11.29

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

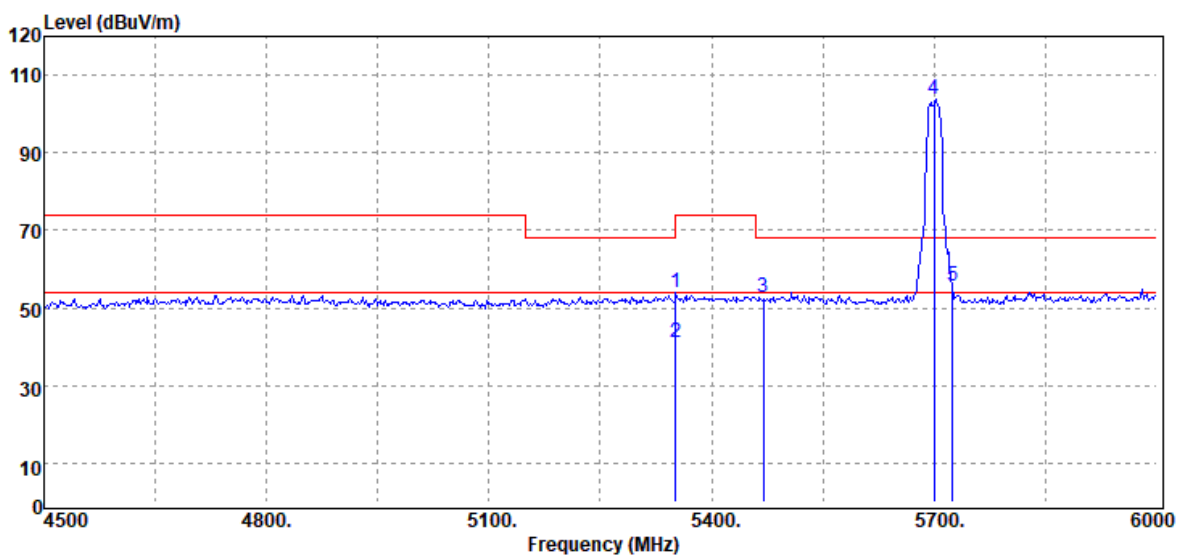

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5352.00	Peak	34.04	19.83	53.87	74.00	-20.13
5352.00	Average	21.19	19.83	41.02	54.00	-12.98
5470.00	Peak	32.70	20.05	52.75	68.20	-15.45
5700.00	Peak	83.70	20.16	103.86	--	--
5725.00	Peak	35.43	20.31	55.74	68.20	-12.46

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

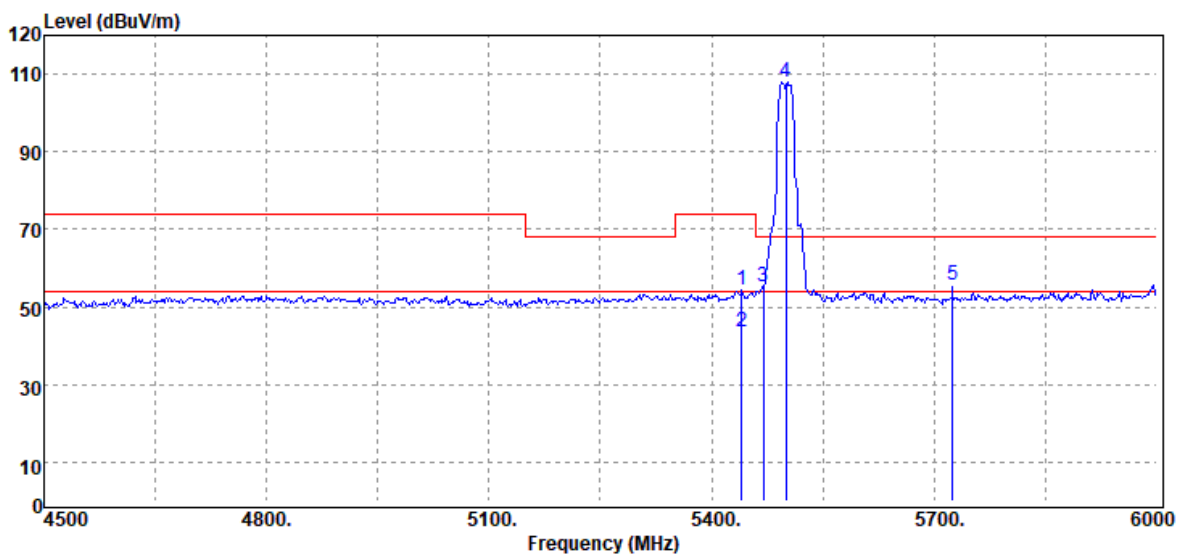

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5440.50	Peak	34.16	20.07	54.23	74.00	-19.77
5440.50	Average	23.55	20.07	43.62	54.00	-10.38
5470.00	Peak	35.21	20.05	55.26	68.20	-12.94
5500.00	Peak	87.77	20.02	107.79	--	--
5725.00	Peak	35.15	20.31	55.46	68.20	-12.74

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

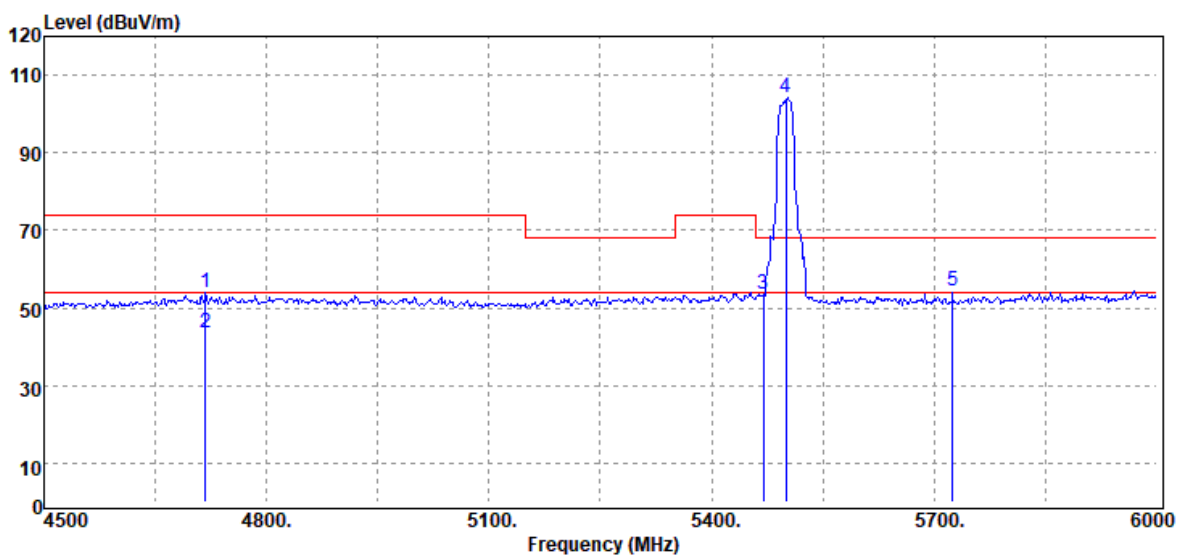

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4717.50	Peak	35.47	18.47	53.94	74.00	-20.06
4717.50	Average	25.05	18.47	43.52	54.00	-10.48
5470.00	Peak	33.69	20.05	53.74	68.20	-14.46
5500.00	Peak	84.33	20.02	104.35	--	--
5725.00	Peak	34.18	20.31	54.49	68.20	-13.71

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

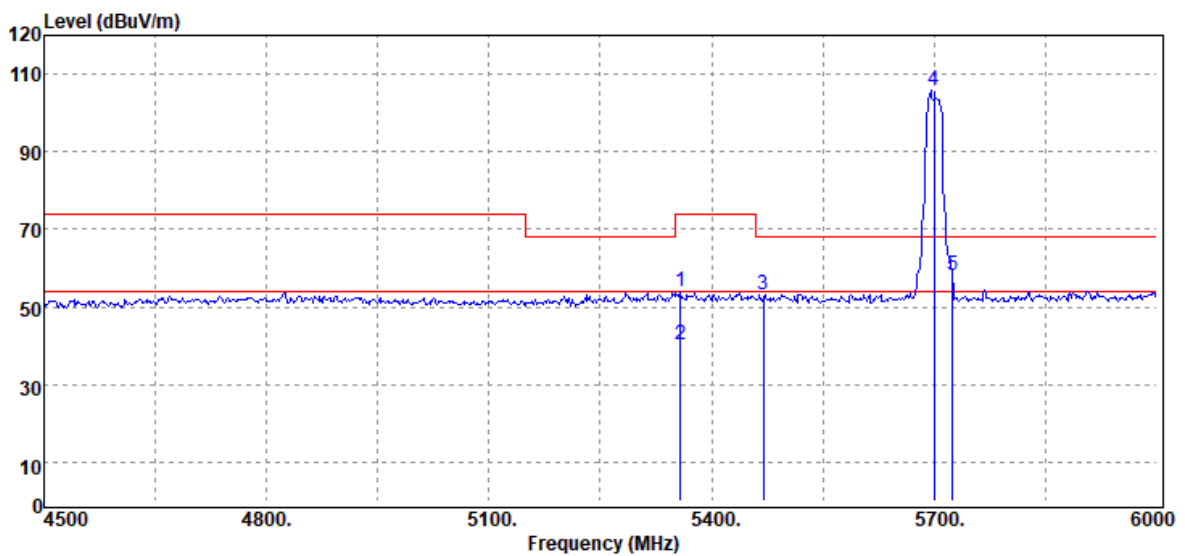

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5358.00	Peak	34.18	19.85	54.03	74.00	-19.97
5358.00	Average	20.24	19.85	40.09	54.00	-13.91
5470.00	Peak	33.06	20.05	53.11	68.20	-15.09
5700.00	Peak	85.56	20.16	105.72	--	--
5725.00	Peak	38.01	20.31	58.32	68.20	-9.88

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

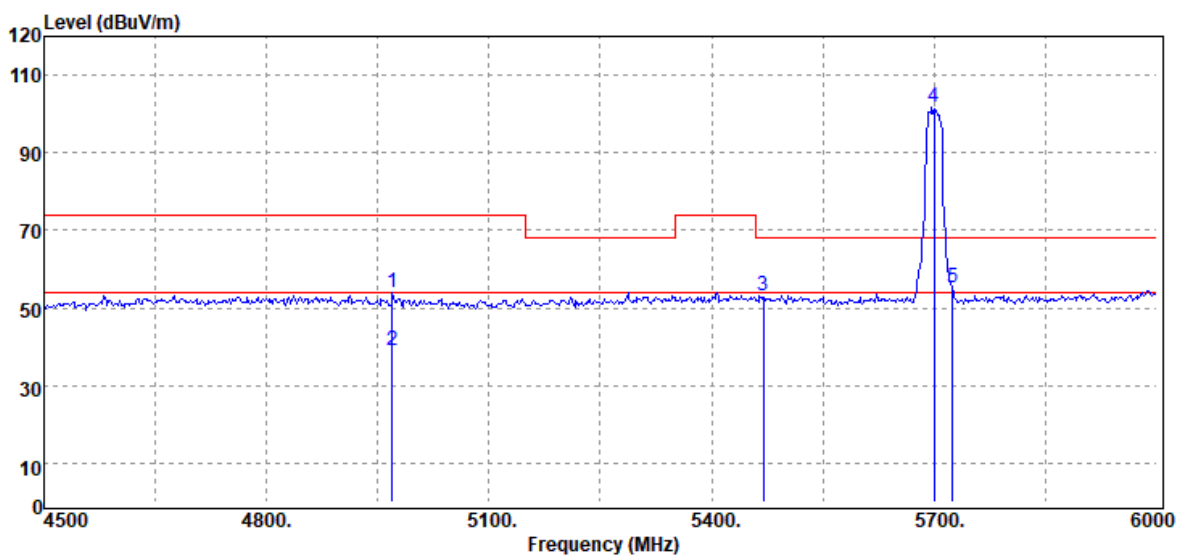

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4969.50	Peak	35.30	18.74	54.04	74.00	-19.96
4969.50	Average	20.10	18.74	38.84	54.00	-15.16
5470.00	Peak	33.18	20.05	53.23	68.20	-14.97
5700.00	Peak	81.38	20.16	101.54	--	--
5725.00	Peak	35.00	20.31	55.31	68.20	-12.89

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	23.1(°C) / 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

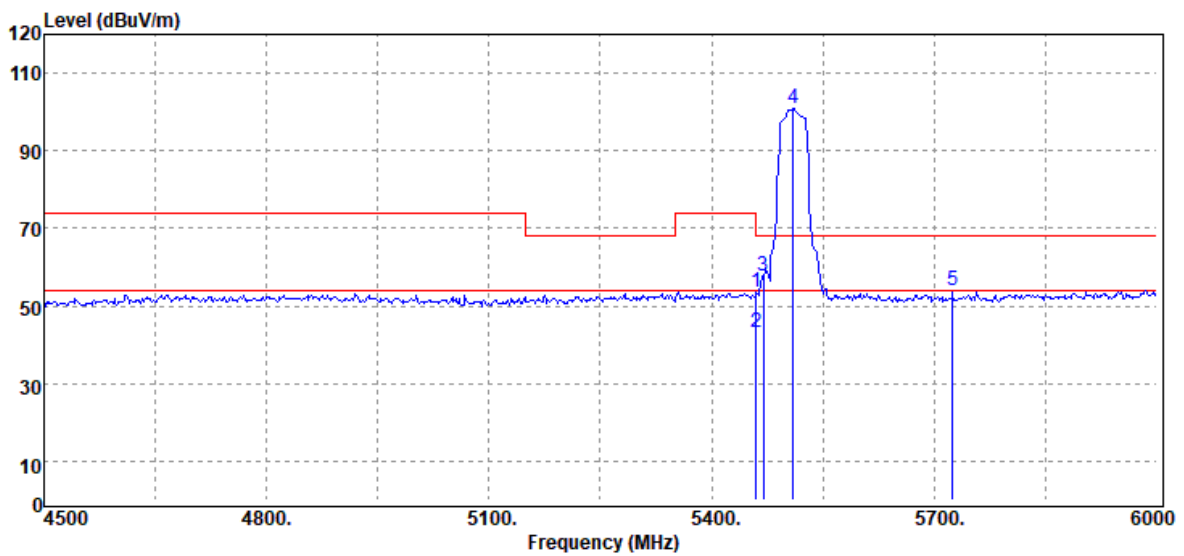

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5460.00	Peak	33.44	20.06	53.50	74.00	-20.50
5460.00	Average	23.06	20.06	43.12	54.00	-10.88
5470.00	Peak	37.70	20.05	57.75	68.20	-10.45
5510.00	Peak	80.89	20.02	100.91	--	--
5725.00	Peak	33.50	20.31	53.81	68.20	-14.39

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

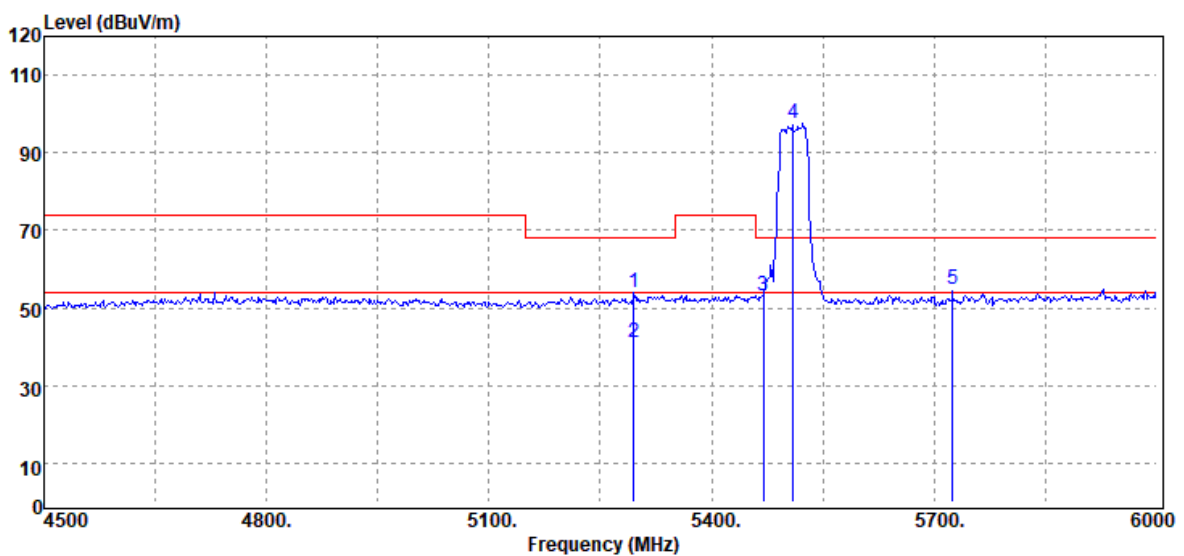

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5295.00	Peak	34.37	19.79	54.16	68.20	-14.04
5295.00	Average	21.46	19.79	41.25	54.00	-12.75
5470.00	Peak	33.20	20.05	53.25	68.20	-14.95
5510.00	Peak	77.60	20.02	97.62	--	--
5725.00	Peak	34.30	20.31	54.61	68.20	-13.59

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

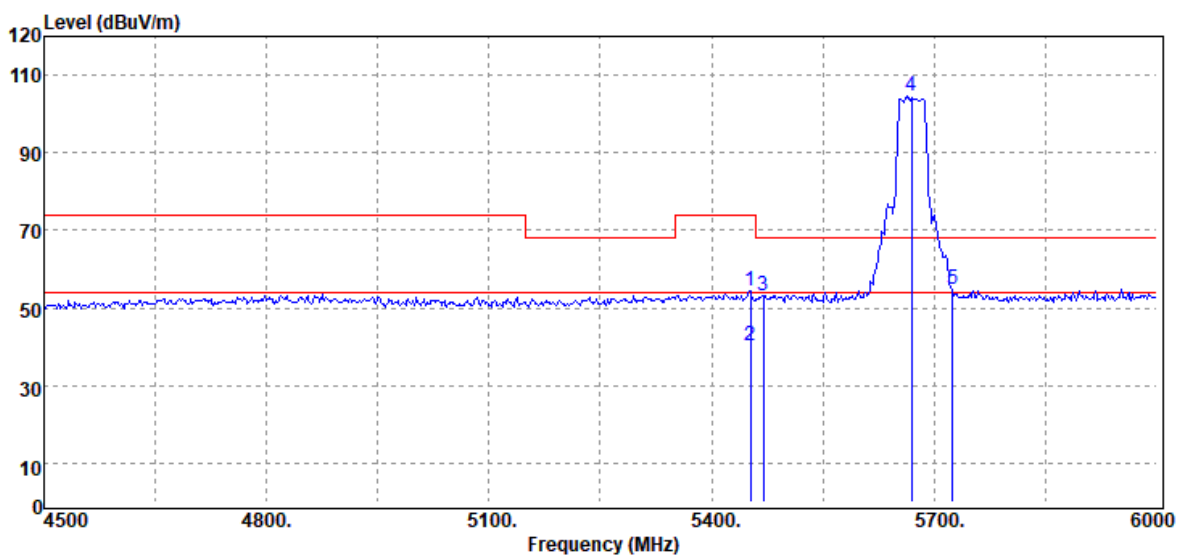

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.50	Peak	34.39	20.06	54.45	74.00	-19.55
5452.50	Average	20.27	20.06	40.33	54.00	-13.67
5470.00	Peak	32.96	20.05	53.01	68.20	-15.19
5670.00	Peak	84.32	20.15	104.47	--	--
5725.00	Peak	34.61	20.31	54.92	68.20	-13.28

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

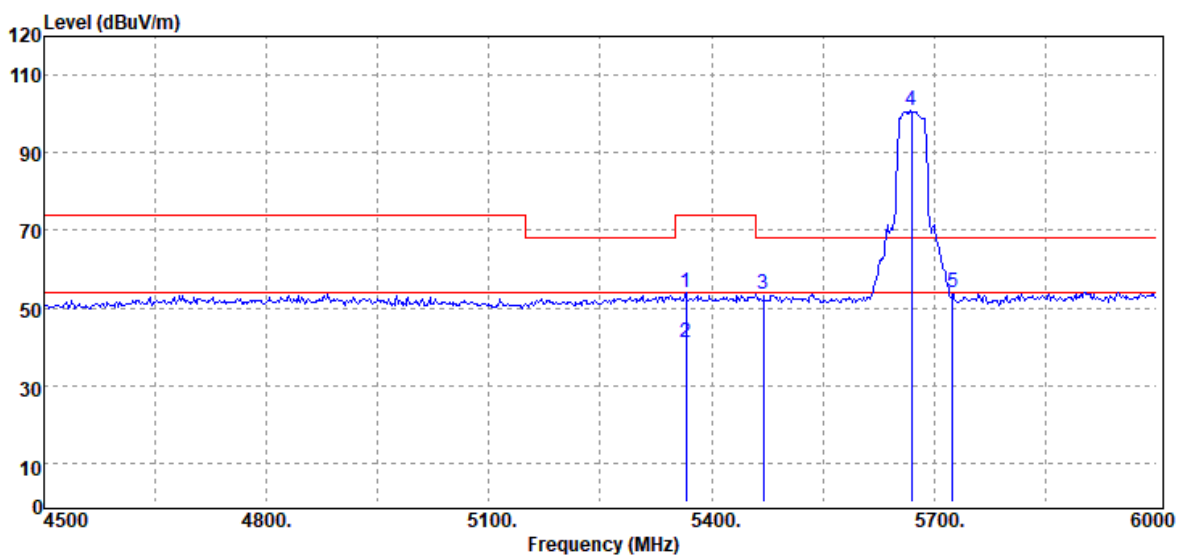

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5365.50	Peak	34.06	19.89	53.95	74.00	-20.05
5365.50	Average	21.19	19.89	41.08	54.00	-12.92
5470.00	Peak	33.34	20.05	53.39	68.20	-14.81
5670.00	Peak	80.88	20.15	101.03	--	--
5725.00	Peak	33.84	20.31	54.15	68.20	-14.05

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

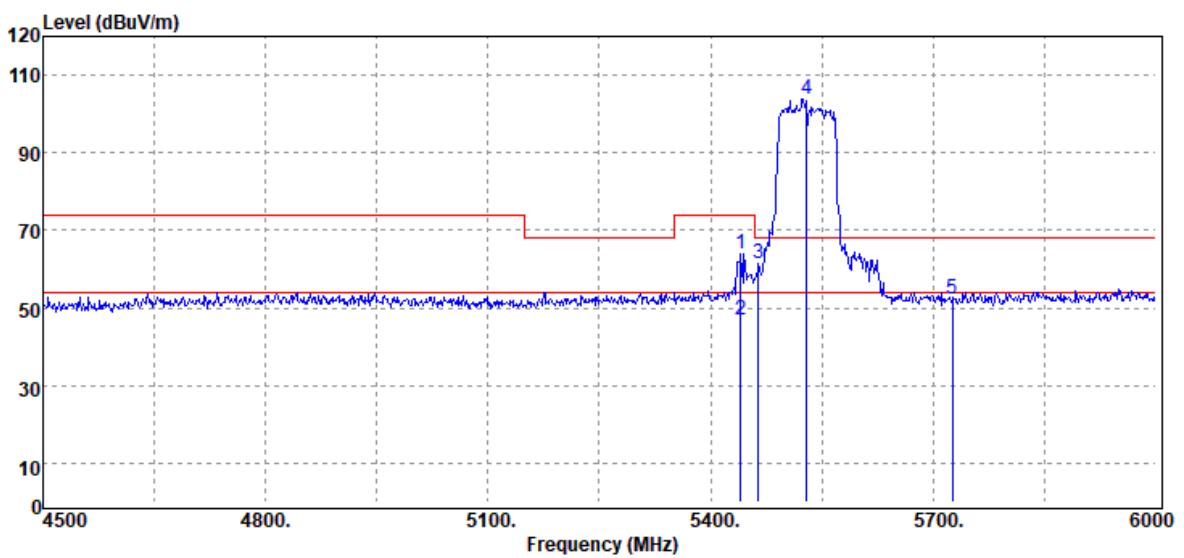

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5440.50	Peak	43.70	20.07	63.77	74.00	-10.23
5440.50	Average	27.05	20.07	47.12	54.00	-6.88
5464.50	Peak	41.41	20.05	61.46	68.20	-6.74
5530.00	Peak	83.82	20.03	103.85	--	--
5725.50	Peak	32.04	20.32	52.36	68.20	-15.84

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

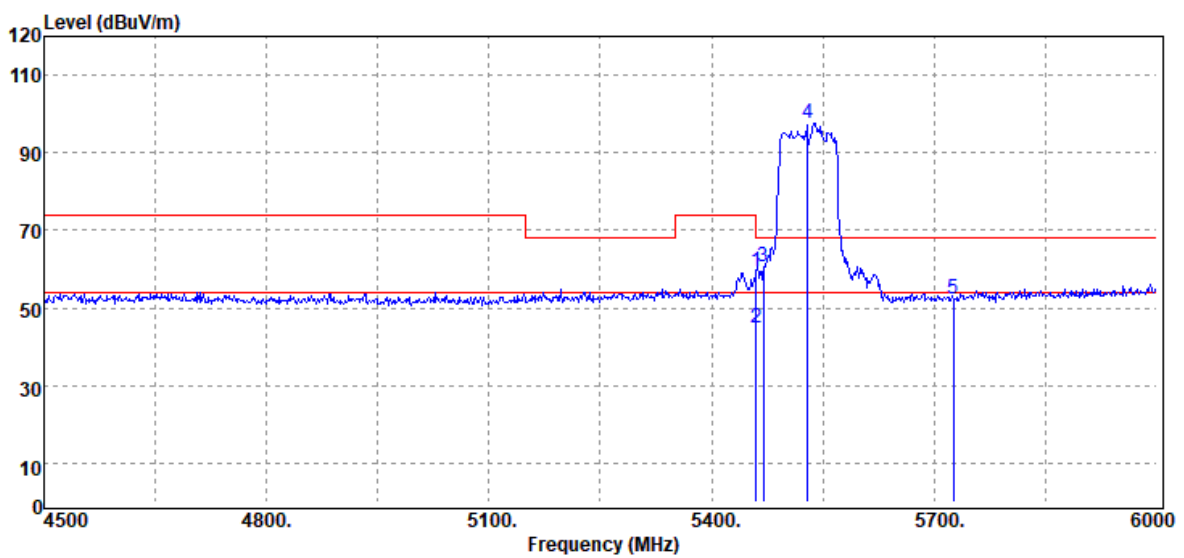

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	39.17	20.06	59.23	74.00	-14.77
5460.00	Average	24.84	20.06	44.90	54.00	-9.10
5470.00	Peak	40.75	20.05	60.80	68.20	-7.40
5530.00	Peak	77.71	20.03	97.74	--	--
5725.50	Peak	32.08	20.32	52.40	68.20	-15.80

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

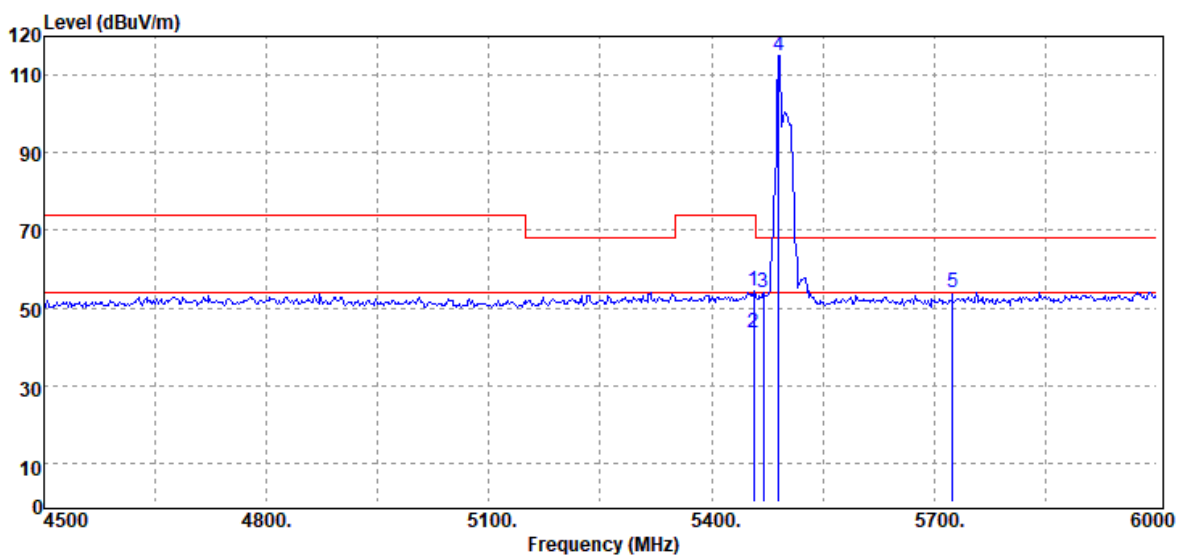

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.00	Peak	34.42	20.07	54.49	74.00	-19.51
5457.00	Average	23.44	20.07	43.51	54.00	-10.49
5470.00	Peak	33.90	20.05	53.95	68.20	-14.25
5490.00	Peak	95.12	20.03	115.15	--	--
5725.00	Peak	33.84	20.31	54.15	68.20	-14.05

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

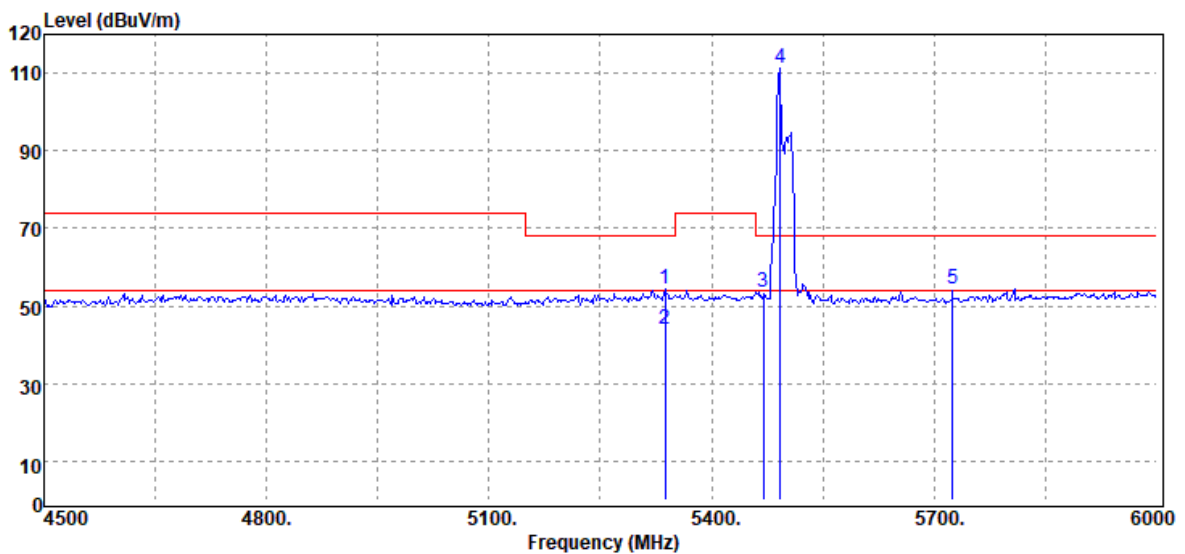

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5337.00	Peak	34.38	19.82	54.20	68.20	-14.00
5337.00	Average	24.38	19.82	44.20	54.00	-9.80
5470.00	Peak	33.57	20.05	53.62	68.20	-14.58
5493.00	Peak	91.39	20.02	111.41	--	--
5725.00	Peak	33.94	20.31	54.25	68.20	-13.95

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

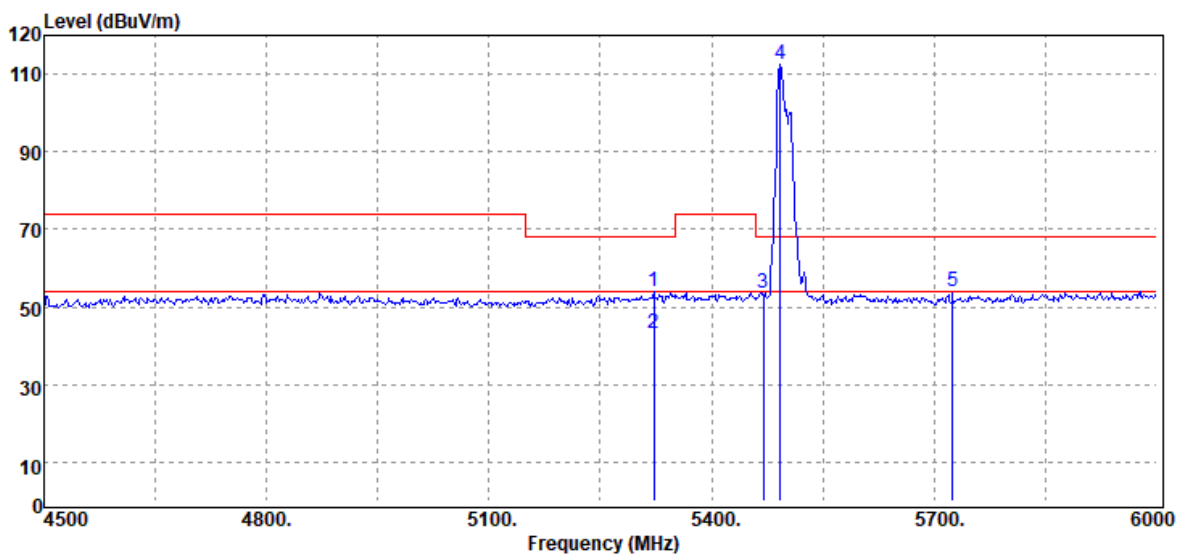

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5322.00	Peak	34.26	19.82	54.08	68.20	-14.12
5322.00	Average	23.29	19.82	43.11	54.00	-10.89
5470.00	Peak	33.49	20.05	53.54	68.20	-14.66
5493.00	Peak	92.60	20.02	112.62	--	--
5725.00	Peak	33.67	20.31	53.98	68.20	-14.22

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

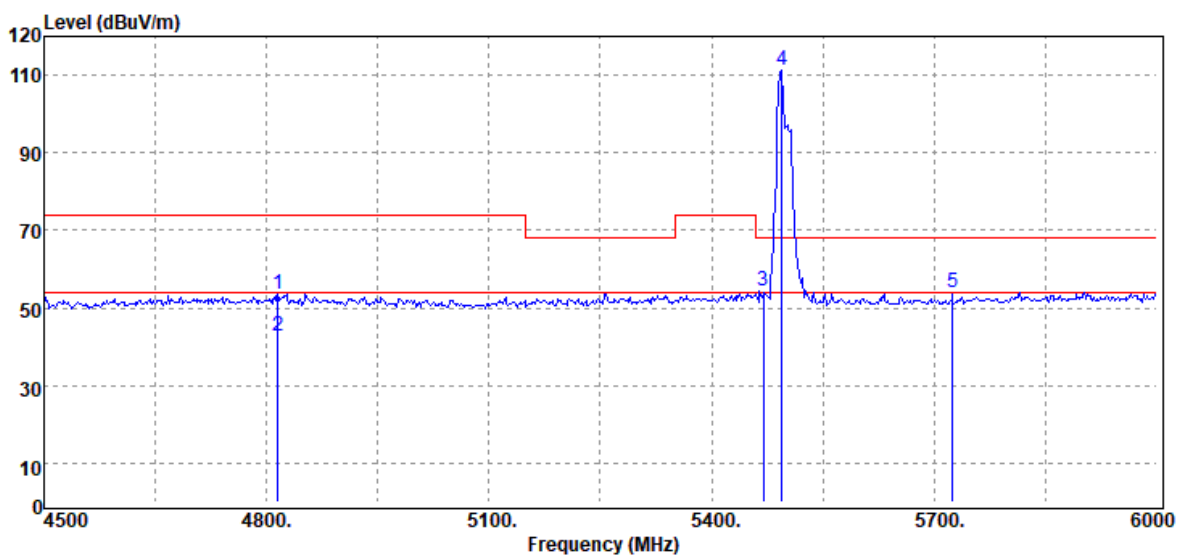

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4815.00	Peak	35.16	18.50	53.66	74.00	-20.34
4815.00	Average	24.30	18.50	42.80	54.00	-11.20
5470.00	Peak	34.29	20.05	54.34	68.20	-13.86
5494.50	Peak	91.30	20.02	111.32	--	--
5725.00	Peak	33.57	20.31	53.88	68.20	-14.32

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

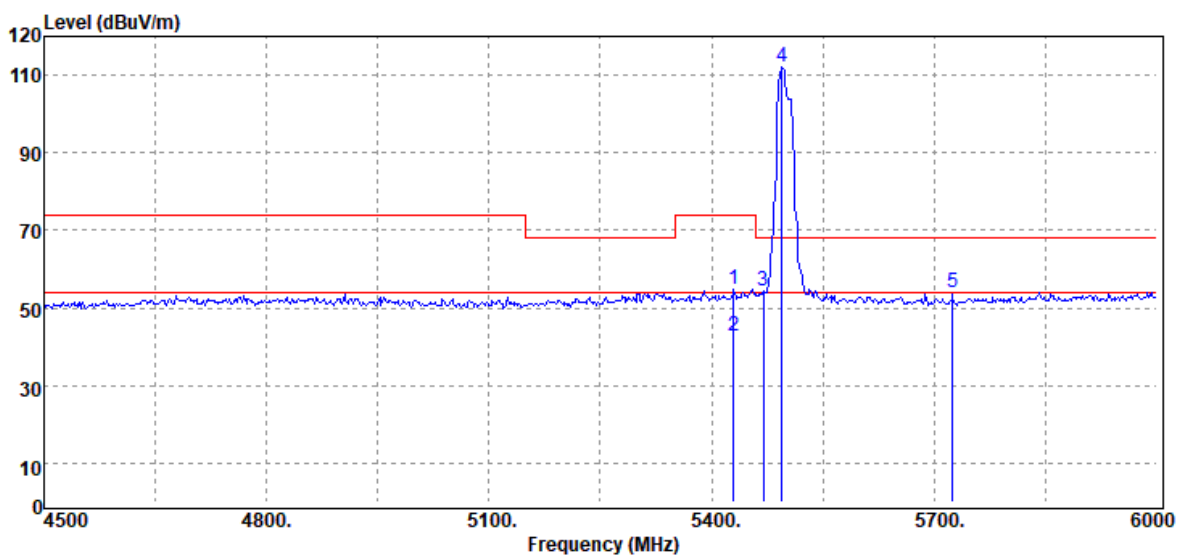

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5430.00	Peak	34.83	20.07	54.90	74.00	-19.10
5430.00	Average	22.65	20.07	42.72	54.00	-11.28
5470.00	Peak	34.17	20.05	54.22	68.20	-13.98
5494.50	Peak	92.04	20.02	112.06	--	--
5725.00	Peak	33.73	20.31	54.04	68.20	-14.16

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

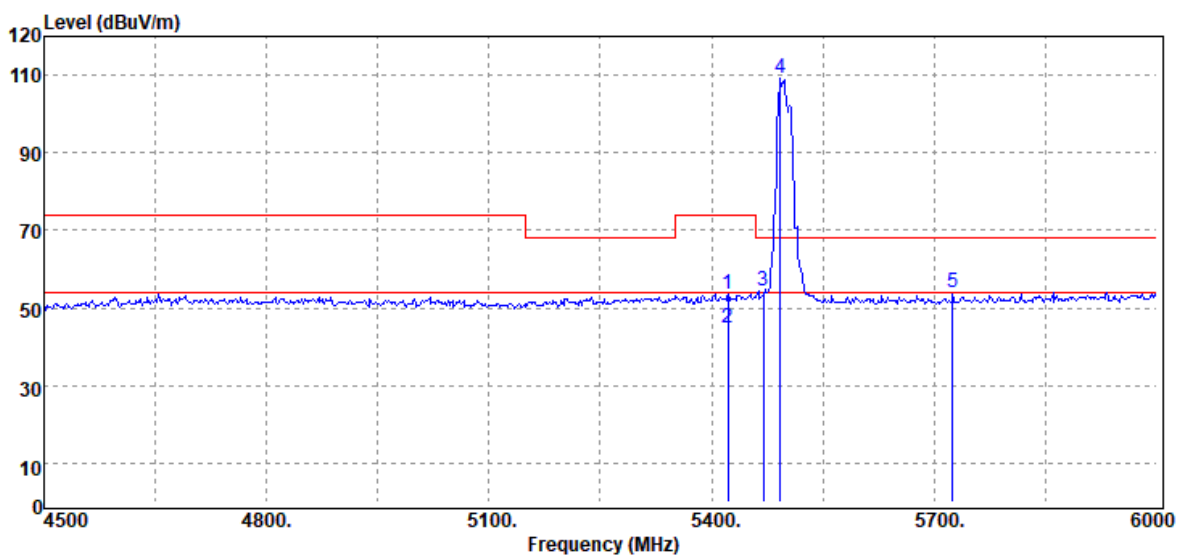

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5422.50	Peak	33.64	20.06	53.70	74.00	-20.30
5422.50	Average	24.60	20.06	44.66	54.00	-9.34
5470.00	Peak	34.19	20.05	54.24	68.20	-13.96
5493.00	Peak	89.07	20.02	109.09	--	--
5725.00	Peak	33.63	20.31	53.94	68.20	-14.26

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

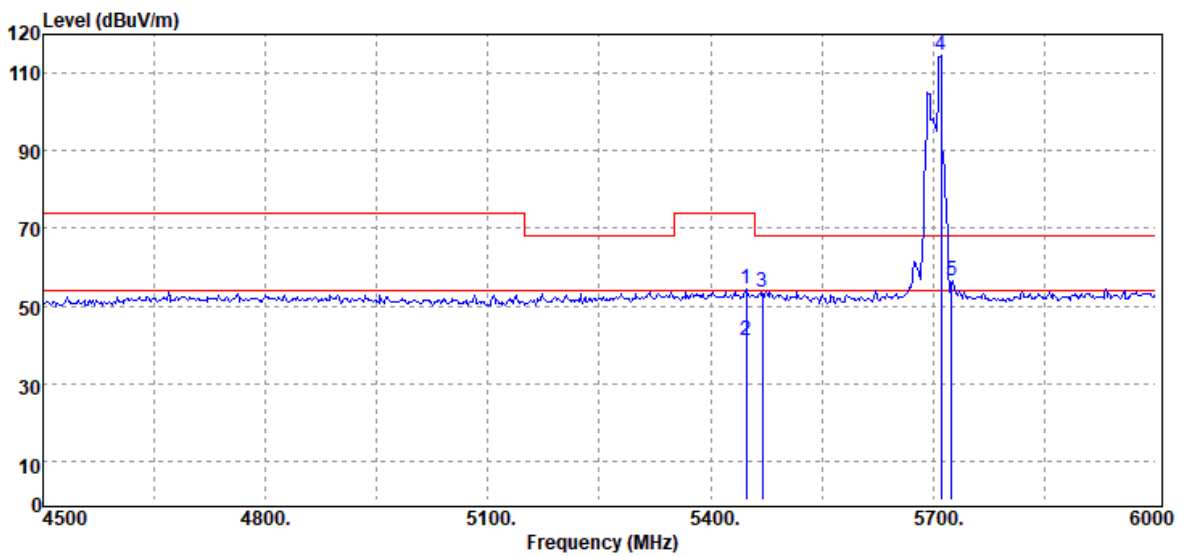

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5448.00	Peak	34.39	20.07	54.46	74.00	-19.54
5448.00	Average	21.17	20.07	41.24	54.00	-12.76
5470.00	Peak	33.52	20.05	53.57	68.20	-14.63
5710.50	Peak	94.29	20.23	114.52	--	--
5725.00	Peak	36.23	20.31	56.54	68.20	-11.66

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

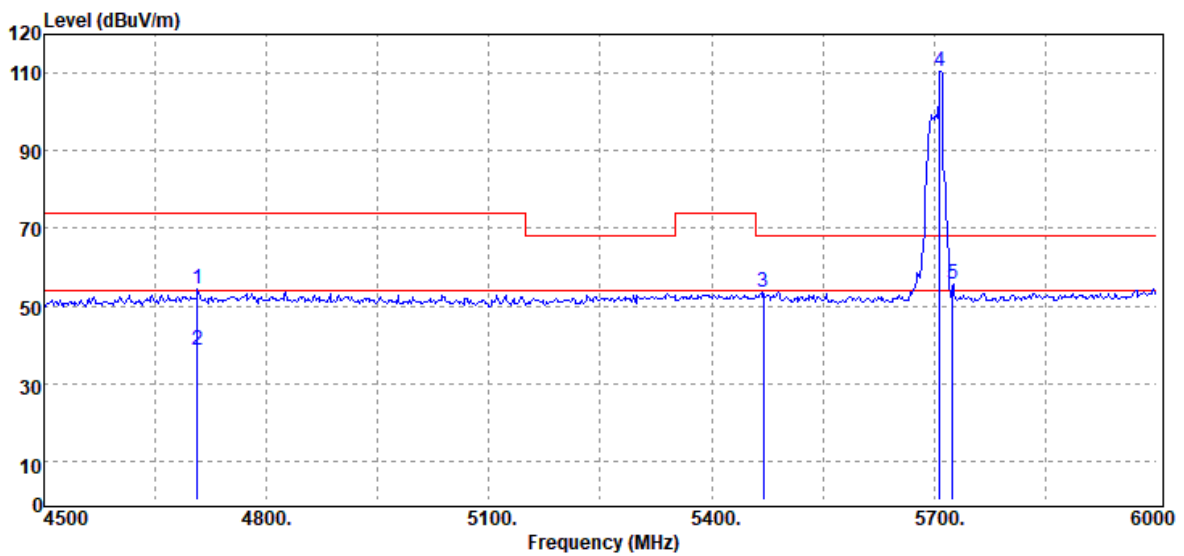

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4707.00	Peak	35.99	18.46	54.45	74.00	-19.55
4707.00	Average	20.31	18.46	38.77	54.00	-15.23
5470.00	Peak	33.55	20.05	53.60	68.20	-14.60
5707.50	Peak	90.28	20.21	110.49	--	--
5725.00	Peak	35.35	20.31	55.66	68.20	-12.54

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

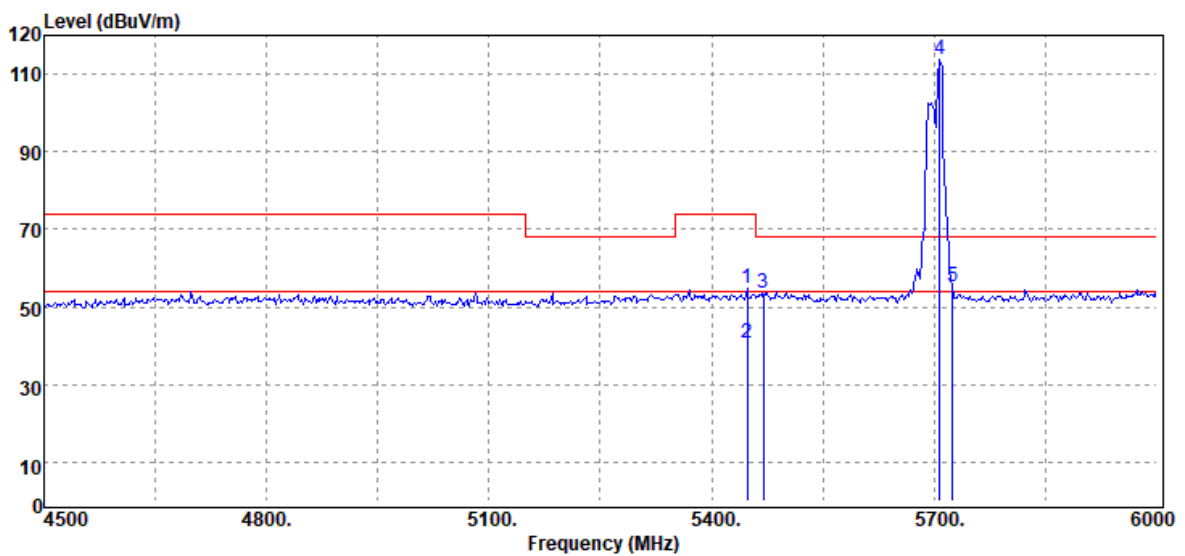

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5448.00	Peak	34.54	20.07	54.61	74.00	-19.39
5448.00	Average	20.43	20.07	40.50	54.00	-13.50
5470.00	Peak	33.59	20.05	53.64	68.20	-14.56
5707.50	Peak	93.73	20.21	113.94	--	--
5725.00	Peak	35.10	20.31	55.41	68.20	-12.79

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

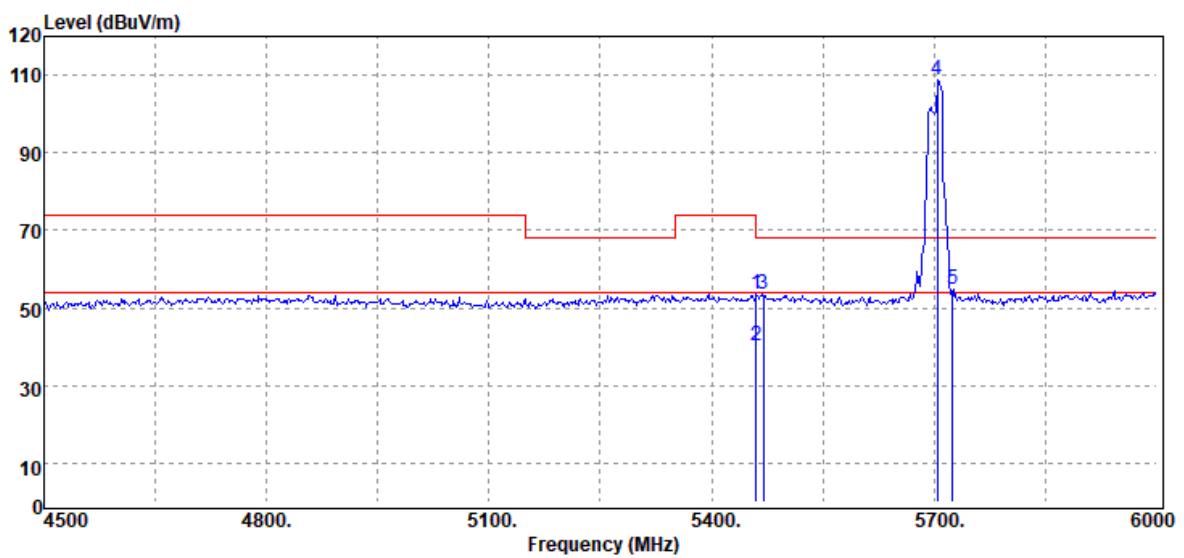

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	33.68	20.06	53.74	74.00	-20.26
5460.00	Average	20.11	20.06	40.17	54.00	-13.83
5470.00	Peak	33.69	20.05	53.74	68.20	-14.46
5704.50	Peak	88.59	20.19	108.78	--	--
5725.00	Peak	34.47	20.31	54.78	68.20	-13.42

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

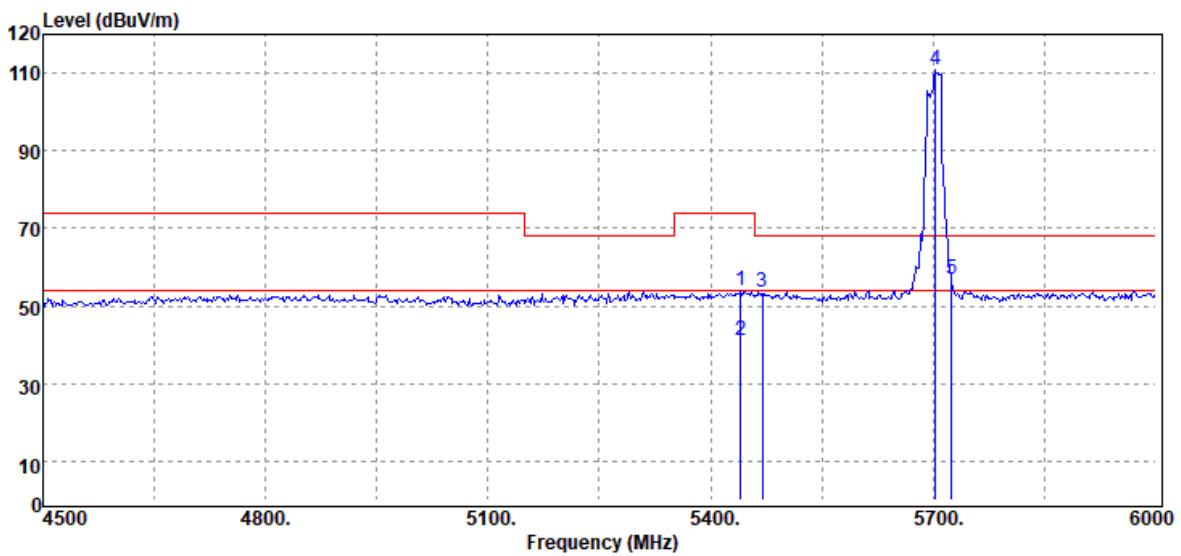

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5440.50	Peak	33.85	20.07	53.92	74.00	-20.08
5440.50	Average	21.15	20.07	41.22	54.00	-12.78
5470.00	Peak	33.38	20.05	53.43	68.20	-14.77
5703.00	Peak	90.60	20.18	110.78	--	--
5725.00	Peak	36.54	20.31	56.85	68.20	-11.35

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

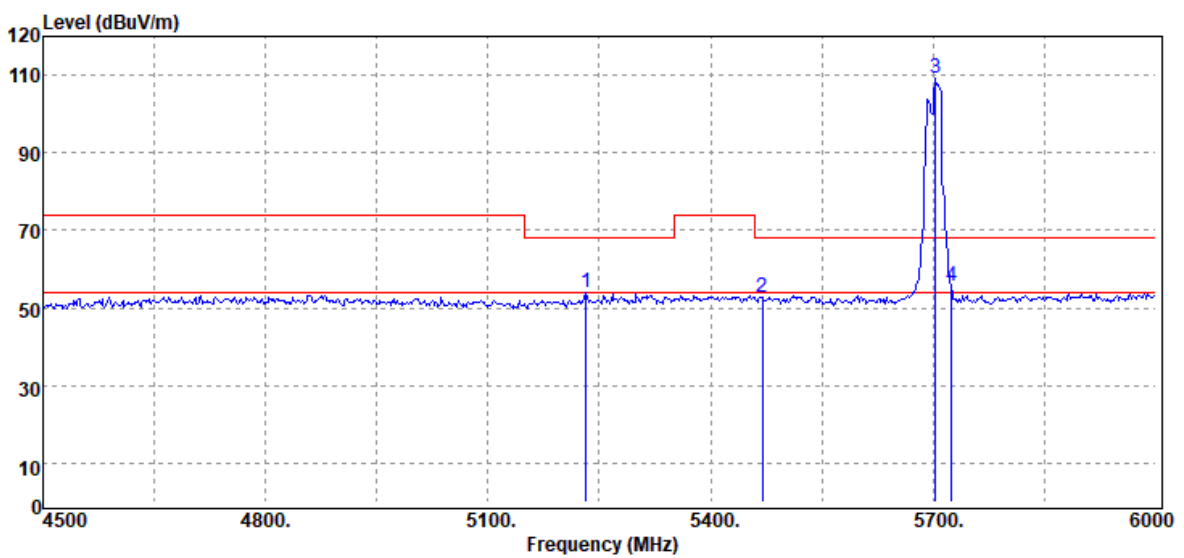

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5232.00	Peak	34.33	19.54	53.87	68.20	-14.33
5470.00	Peak	32.88	20.05	52.93	68.20	-15.27
5703.00	Peak	88.96	20.18	109.14	--	--
5725.00	Peak	35.19	20.31	55.50	68.20	-12.70


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

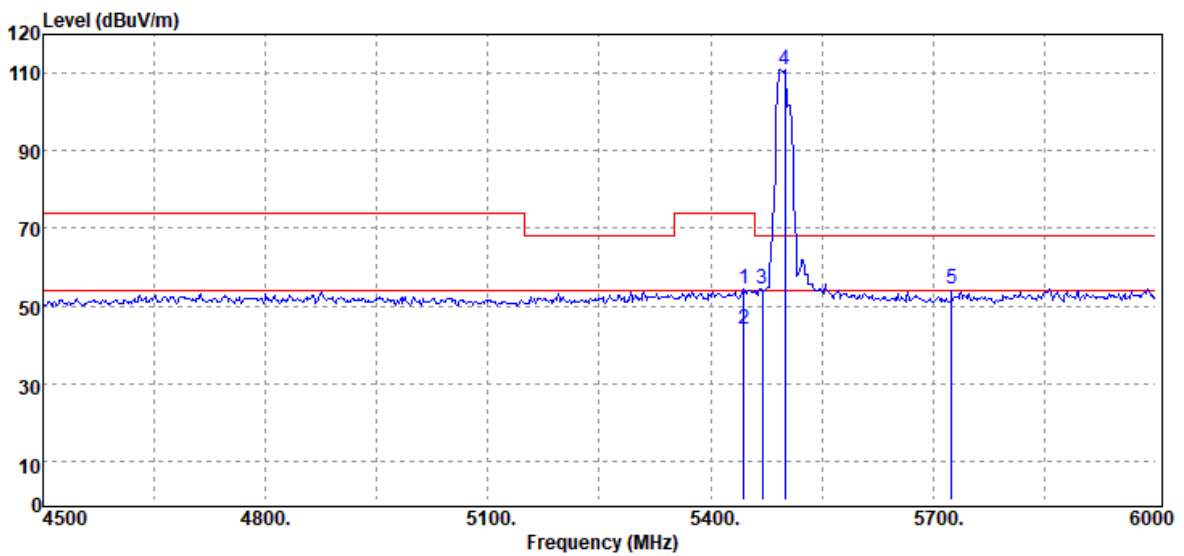

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5445.00	Peak	34.45	20.06	54.51	74.00	-19.49
5445.00	Average	24.07	20.06	44.13	54.00	-9.87
5470.00	Peak	34.45	20.05	54.50	68.20	-13.70
5500.50	Peak	90.99	20.02	111.01	-	-
5725.00	Peak	34.19	20.31	54.50	68.20	-13.70


Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

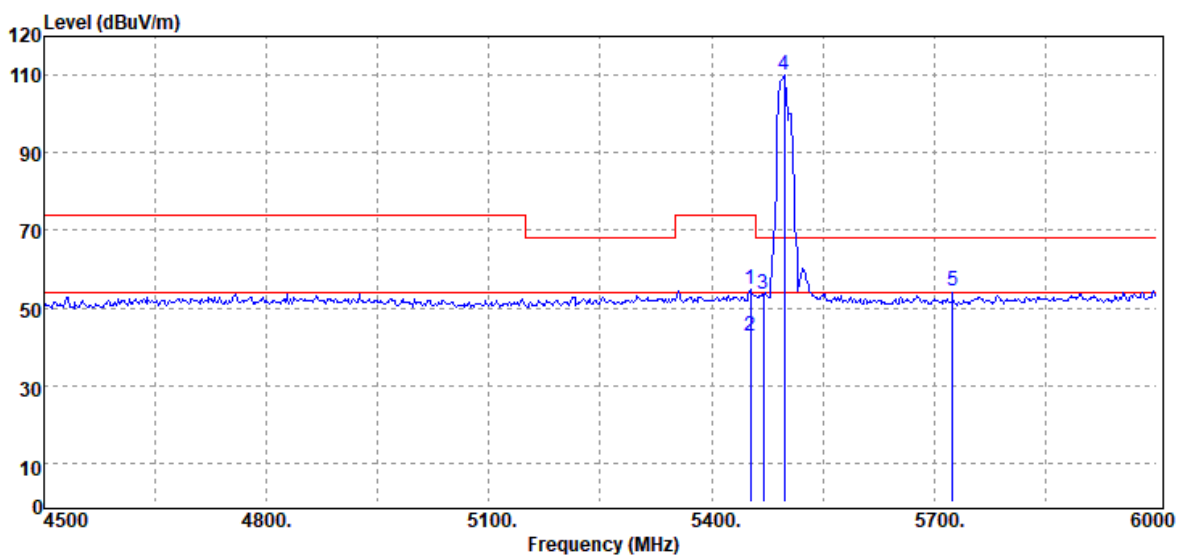

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.50	Peak	34.69	20.06	54.75	74.00	-19.25
5452.50	Average	22.90	20.06	42.96	54.00	-11.04
5470.00	Peak	33.34	20.05	53.39	68.20	-14.81
5497.50	Peak	89.96	20.02	109.98	-	-
5725.00	Peak	33.97	20.31	54.28	68.20	-13.92

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

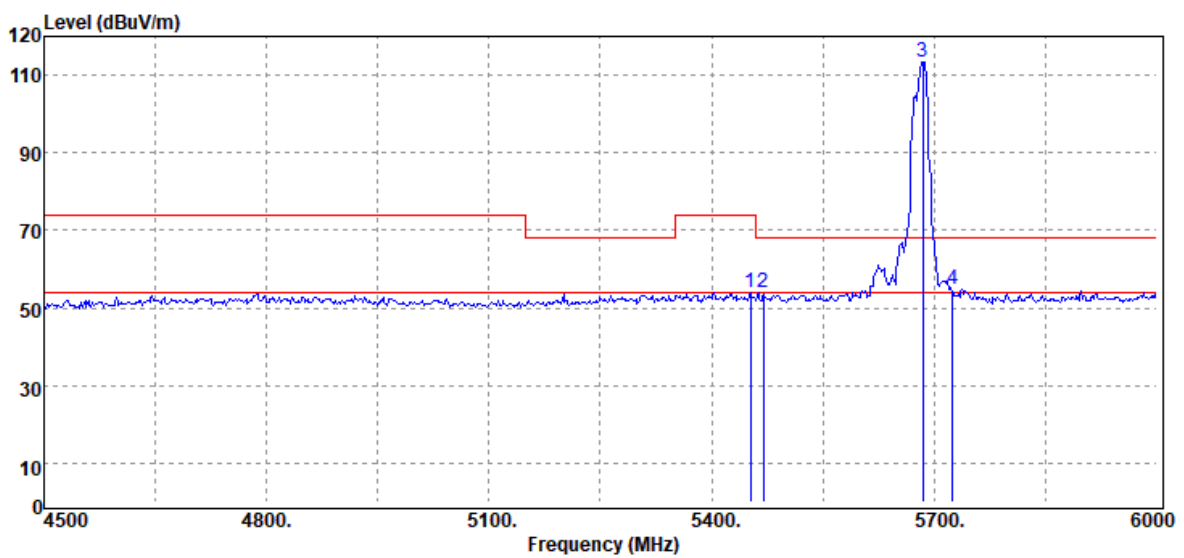

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.50	Peak	34.02	20.06	54.08	74.00	-19.92
5470.00	Peak	33.87	20.05	53.92	68.20	-14.28
5685.00	Peak	93.32	20.16	113.48	-	-
5725.00	Peak	34.61	20.31	54.92	68.20	-13.28

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

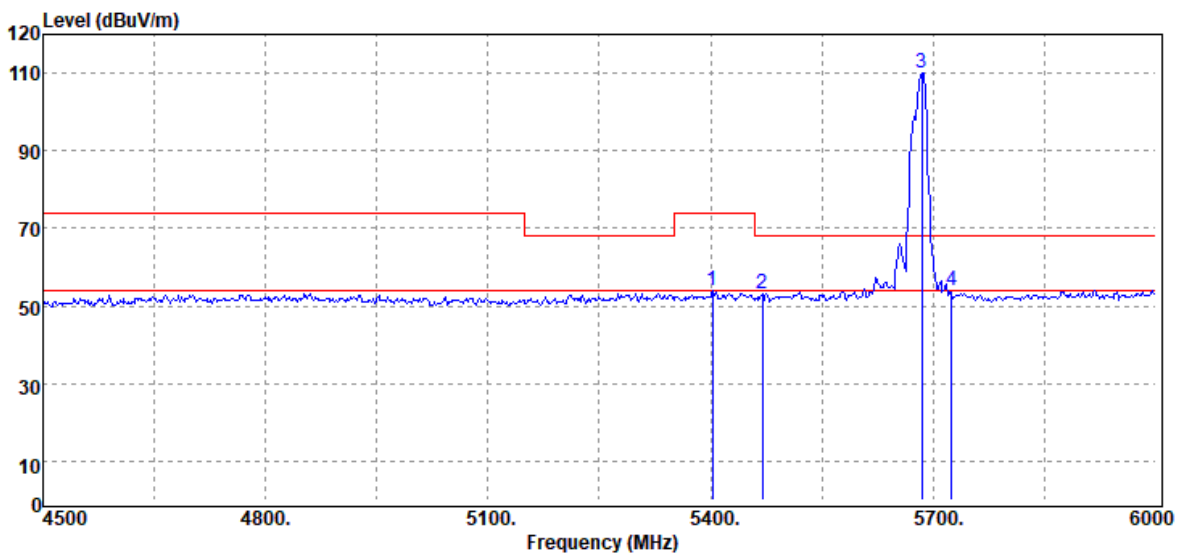

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5403.00	Peak	33.89	20.06	53.95	74.00	-20.05
5470.00	Peak	32.95	20.05	53.00	68.20	-15.20
5685.00	Peak	90.04	20.16	110.20	-	-
5725.00	Peak	33.77	20.31	54.08	68.20	-14.12

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

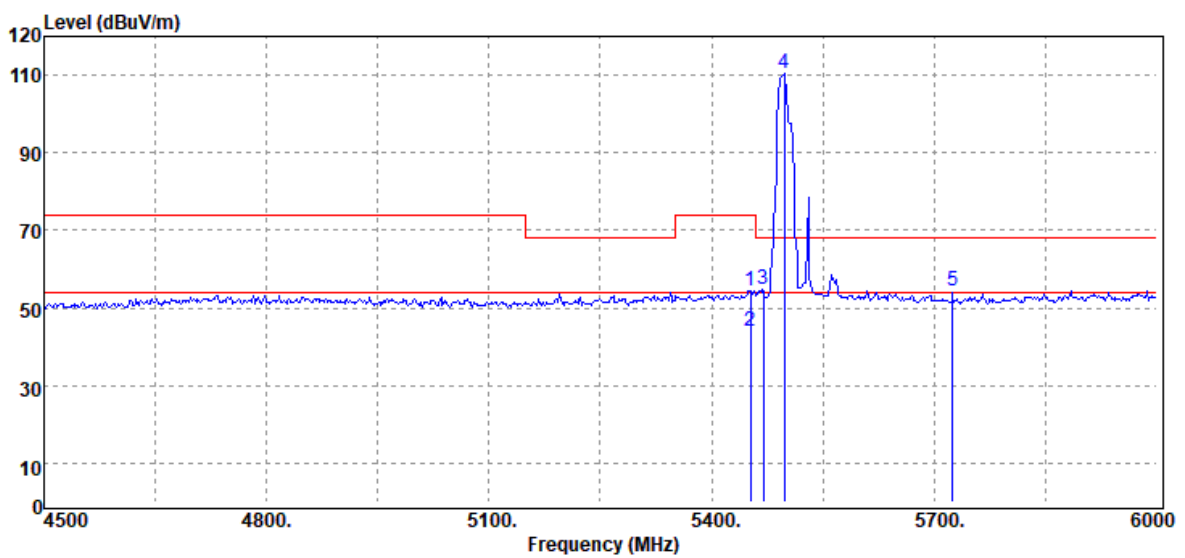

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.50	Peak	34.44	20.06	54.50	74.00	-19.50
5452.50	Average	23.75	20.06	43.81	54.00	-10.19
5470.00	Peak	34.79	20.05	54.84	68.20	-13.36
5497.50	Peak	90.26	20.02	110.28	-	-
5725.00	Peak	34.20	20.31	54.51	68.20	-13.69

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

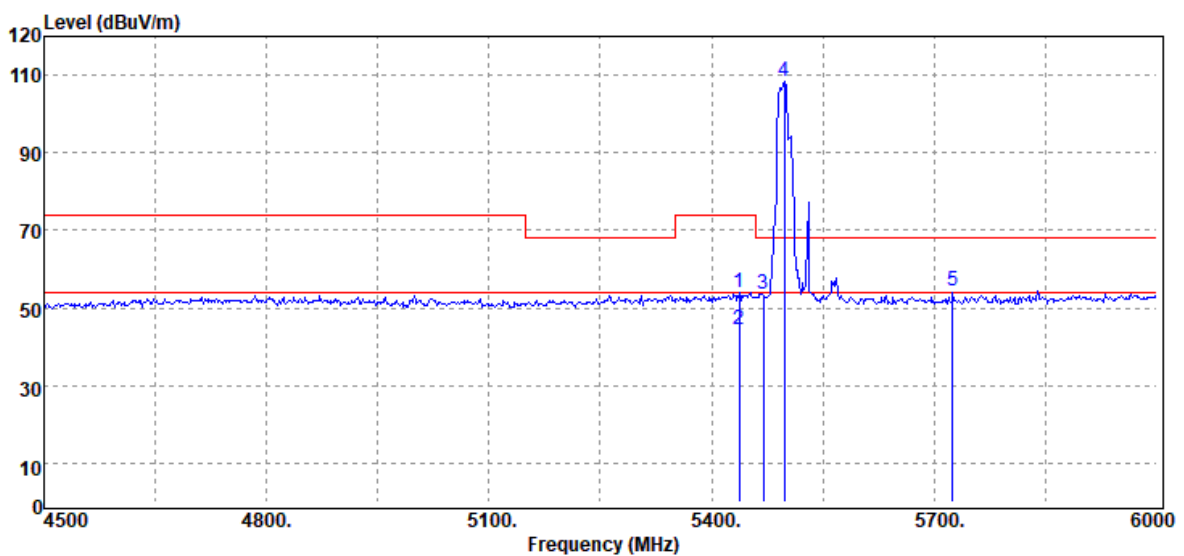


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5437.50	Peak	34.08	20.07	54.15	74.00	-19.85
5437.50	Average	24.53	20.07	44.60	54.00	-9.40
5470.00	Peak	33.63	20.05	53.68	68.20	-14.52
5497.50	Peak	88.29	20.02	108.31	-	-
5725.00	Peak	33.98	20.31	54.29	68.20	-13.91

Report No.: T210319W02-RP2

Test Data for UNII-3


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

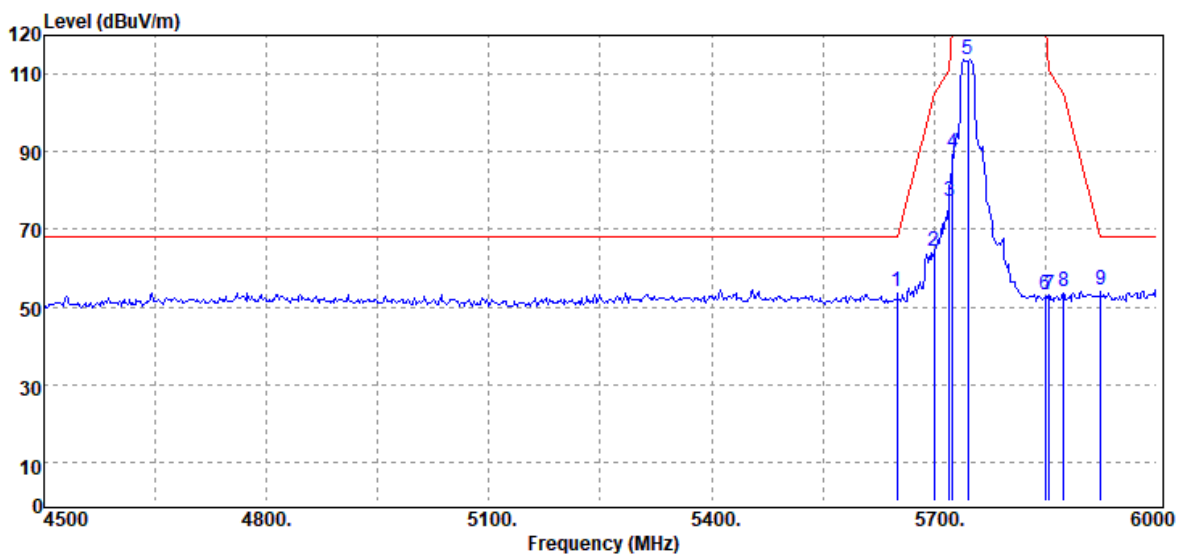

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.64	20.15	53.79	68.20	-14.41
5700.00	Peak	44.21	20.16	64.37	105.20	-40.83
5720.00	Peak	56.90	20.29	77.19	110.80	-33.61
5725.00	Peak	69.21	20.31	89.52	122.20	-32.68
5745.00	Peak	93.30	20.45	113.75	--	--
5850.00	Peak	32.49	20.73	53.22	122.20	-68.98
5855.00	Peak	32.46	20.76	53.22	110.80	-57.58
5875.00	Peak	32.97	20.84	53.81	105.20	-51.39
5925.00	Peak	33.18	21.06	54.24	68.20	-13.96

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

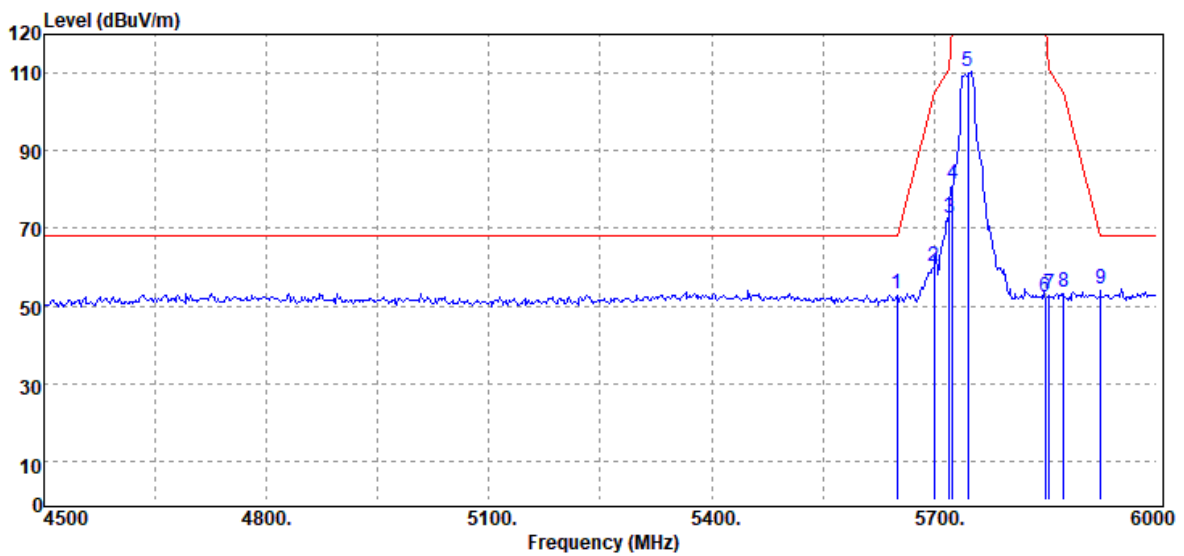

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.12	20.15	53.27	68.20	-14.93
5700.00	Peak	39.92	20.16	60.08	105.20	-45.12
5720.00	Peak	52.27	20.29	72.56	110.80	-38.24
5725.00	Peak	61.11	20.31	81.42	122.20	-40.78
5745.00	Peak	89.89	20.45	110.34	--	--
5850.00	Peak	31.67	20.73	52.40	122.20	-69.80
5855.00	Peak	32.29	20.76	53.05	110.80	-57.75
5875.00	Peak	32.90	20.84	53.74	105.20	-51.46
5925.00	Peak	33.23	21.06	54.29	68.20	-13.91

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

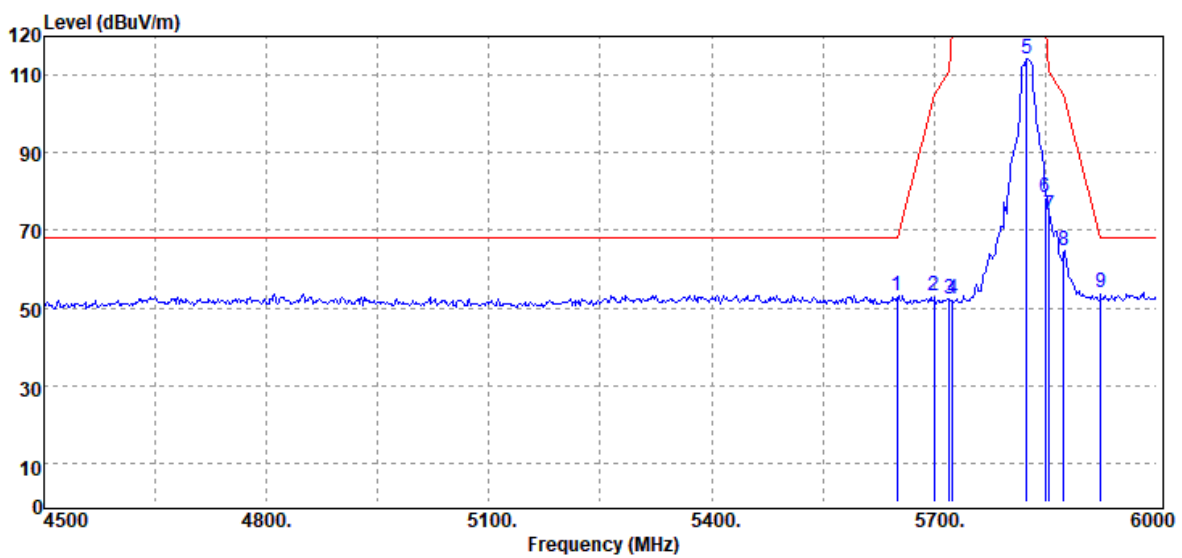

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5650.00	Peak	33.20	20.15	53.35	68.20	-14.85
5700.00	Peak	32.95	20.16	53.11	105.20	-52.09
5720.00	Peak	32.09	20.29	52.38	110.80	-58.42
5725.00	Peak	32.07	20.31	52.38	122.20	-69.82
5825.00	Peak	93.44	20.63	114.07	--	--
5850.00	Peak	57.72	20.73	78.45	122.20	-43.75
5855.00	Peak	53.25	20.76	74.01	110.80	-36.79
5875.00	Peak	43.95	20.84	64.79	105.20	-40.41
5925.00	Peak	33.02	21.06	54.08	68.20	-14.12

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

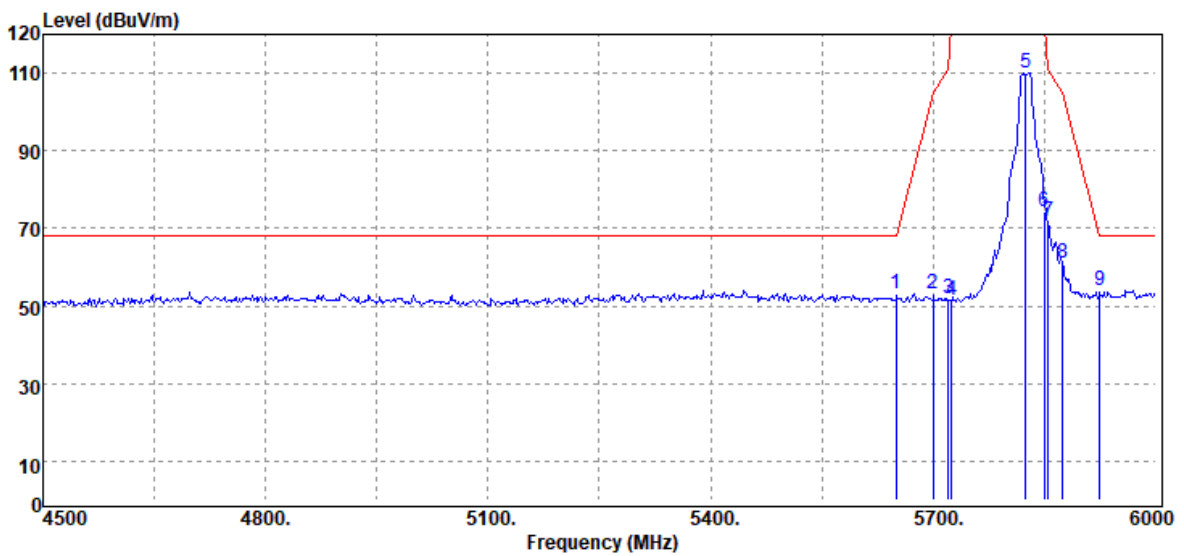

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.94	20.15	53.09	68.20	-15.11
5700.00	Peak	32.82	20.16	52.98	105.20	-52.22
5720.00	Peak	31.81	20.29	52.10	110.80	-58.70
5725.00	Peak	31.33	20.31	51.64	122.20	-70.56
5825.00	Peak	89.59	20.63	110.22	--	--
5850.00	Peak	53.54	20.73	74.27	122.20	-47.93
5855.00	Peak	51.08	20.76	71.84	110.80	-38.96
5875.00	Peak	40.16	20.84	61.00	105.20	-44.20
5925.00	Peak	32.94	21.06	54.00	68.20	-14.20

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

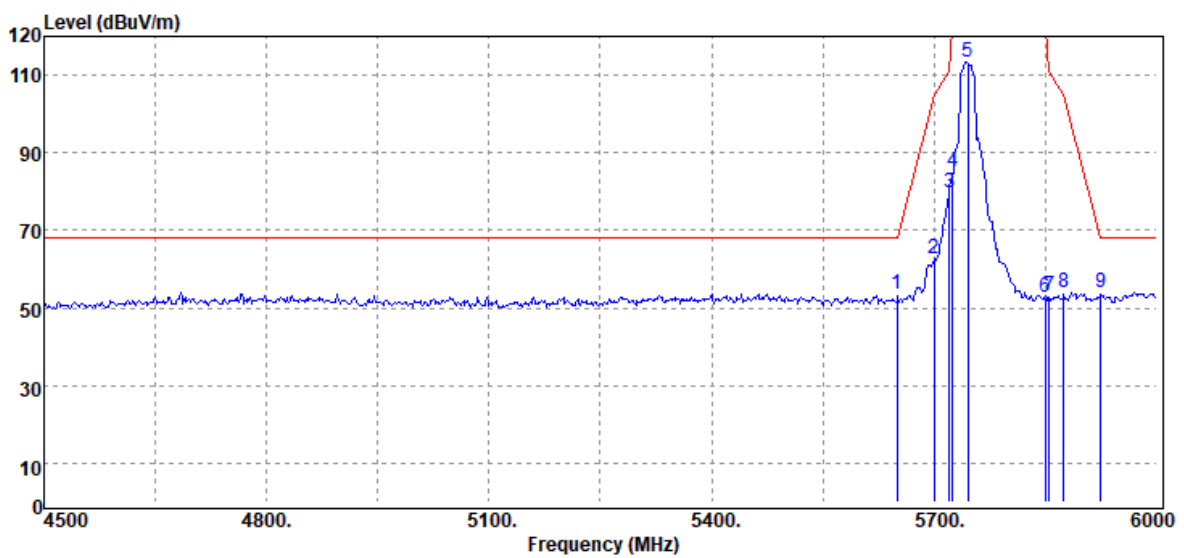

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.51	20.15	53.66	68.20	-14.54
5700.00	Peak	42.35	20.16	62.51	105.20	-42.69
5720.00	Peak	59.25	20.29	79.54	110.80	-31.26
5725.00	Peak	64.93	20.31	85.24	122.20	-36.96
5745.00	Peak	92.78	20.45	113.23	--	--
5850.00	Peak	31.86	20.73	52.59	122.20	-69.61
5855.00	Peak	32.59	20.76	53.35	110.80	-57.45
5875.00	Peak	33.09	20.84	53.93	105.20	-51.27
5925.00	Peak	32.86	21.06	53.92	68.20	-14.28

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

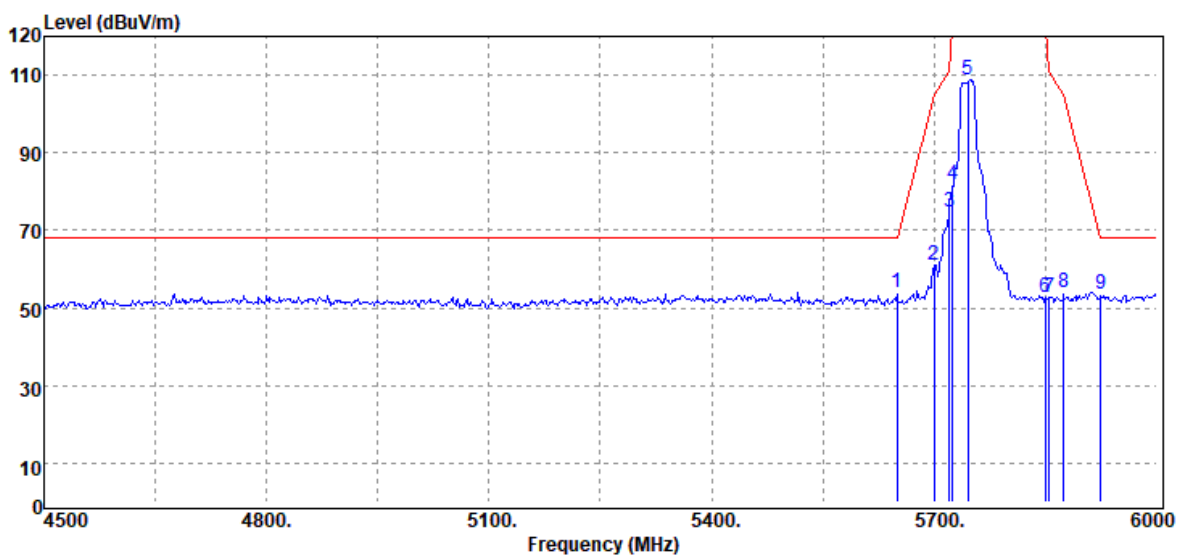

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.81	20.15	53.96	68.20	-14.24
5700.00	Peak	41.07	20.16	61.23	105.20	-43.97
5720.00	Peak	54.64	20.29	74.93	110.80	-35.87
5725.00	Peak	61.53	20.31	81.84	122.20	-40.36
5745.00	Peak	88.31	20.45	108.76	--	--
5850.00	Peak	32.20	20.73	52.93	122.20	-69.27
5855.00	Peak	32.17	20.76	52.93	110.80	-57.87
5875.00	Peak	33.04	20.84	53.88	105.20	-51.32
5925.00	Peak	32.50	21.06	53.56	68.20	-14.64

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5825 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

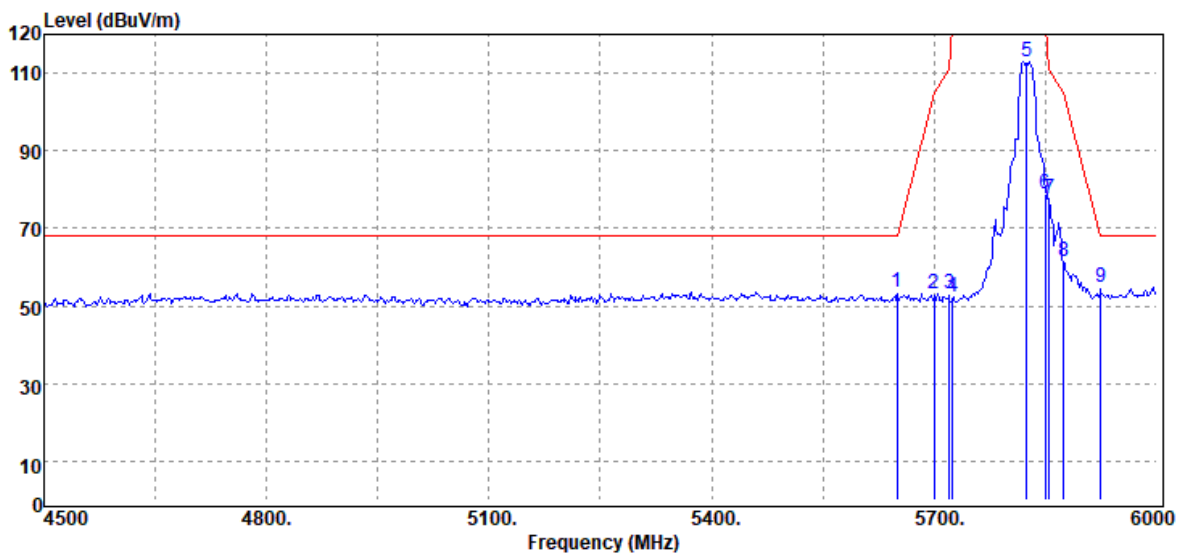

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.55	20.15	53.70	68.20	-14.50
5700.00	Peak	33.11	20.16	53.27	105.20	-51.93
5720.00	Peak	32.89	20.29	53.18	110.80	-57.62
5725.00	Peak	31.87	20.31	52.18	122.20	-70.02
5825.00	Peak	92.31	20.63	112.94	--	--
5850.00	Peak	57.97	20.73	78.70	122.20	-43.50
5855.00	Peak	56.70	20.76	77.46	110.80	-33.34
5875.00	Peak	40.74	20.84	61.58	105.20	-43.62
5925.00	Peak	33.55	21.06	54.61	68.20	-13.59

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5825 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

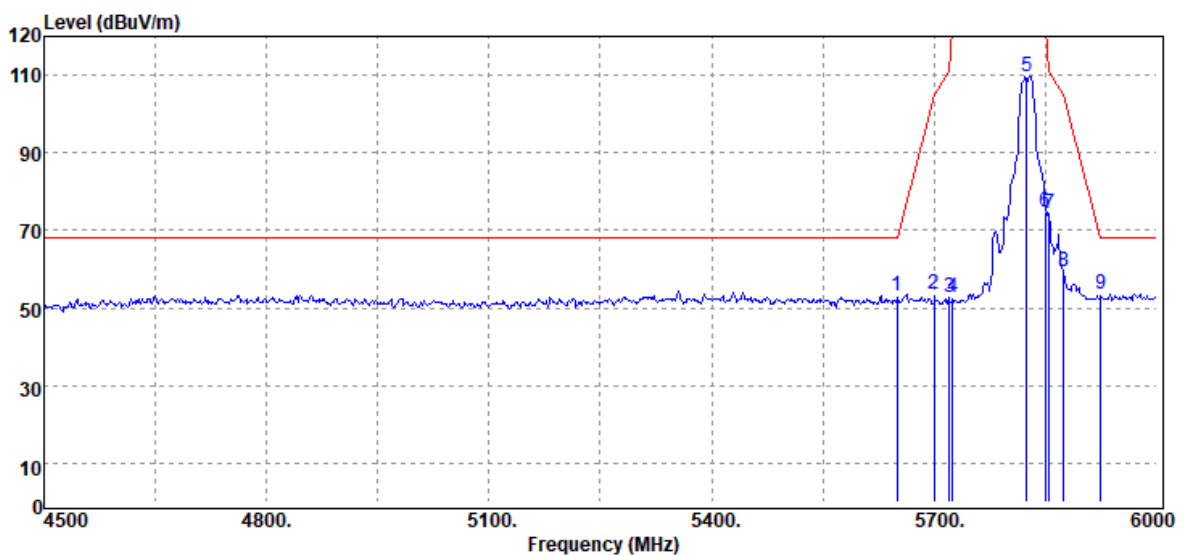

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5650.00	Peak	33.07	20.15	53.22	68.20	-14.98
5700.00	Peak	33.58	20.16	53.74	105.20	-51.46
5720.00	Peak	32.43	20.29	52.72	110.80	-58.08
5725.00	Peak	32.41	20.31	52.72	122.20	-69.48
5825.00	Peak	89.19	20.63	109.82	--	--
5850.00	Peak	53.82	20.73	74.55	122.20	-47.65
5855.00	Peak	53.57	20.76	74.33	110.80	-36.47
5875.00	Peak	38.40	20.84	59.24	105.20	-45.96
5925.00	Peak	32.39	21.06	53.45	68.20	-14.75

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

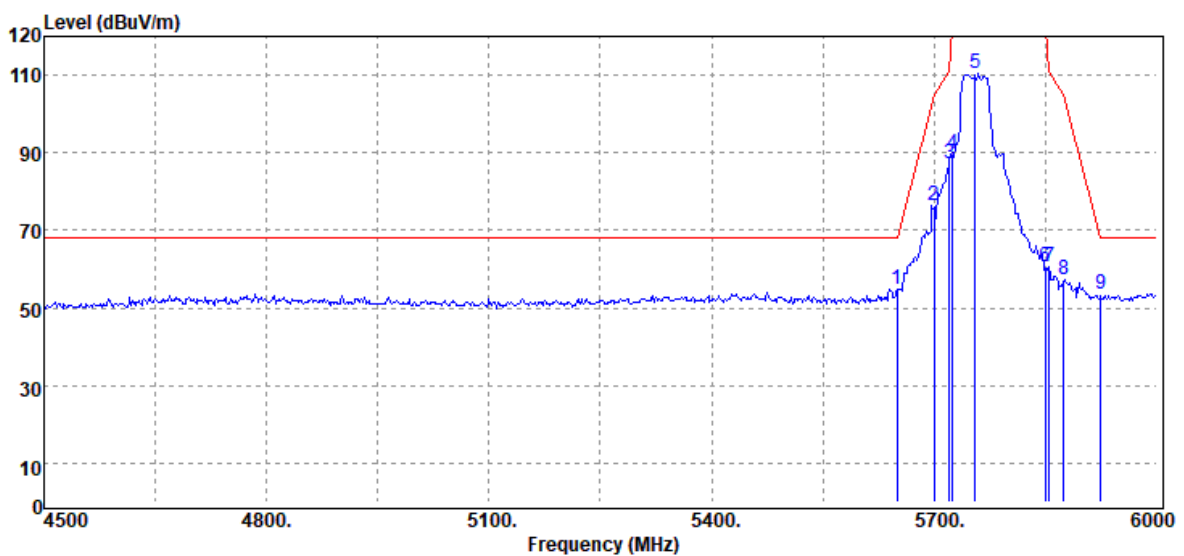

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	34.83	20.15	54.98	68.20	-13.22
5700.00	Peak	56.08	20.16	76.24	105.20	-28.96
5720.00	Peak	66.99	20.29	87.28	110.80	-23.52
5725.00	Peak	69.41	20.31	89.72	122.20	-32.48
5755.00	Peak	89.92	20.48	110.40	--	--
5850.00	Peak	39.90	20.73	60.63	122.20	-61.57
5855.00	Peak	39.87	20.76	60.63	110.80	-50.17
5875.00	Peak	36.33	20.84	57.17	105.20	-48.03
5925.00	Peak	32.68	21.06	53.74	68.20	-14.46

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

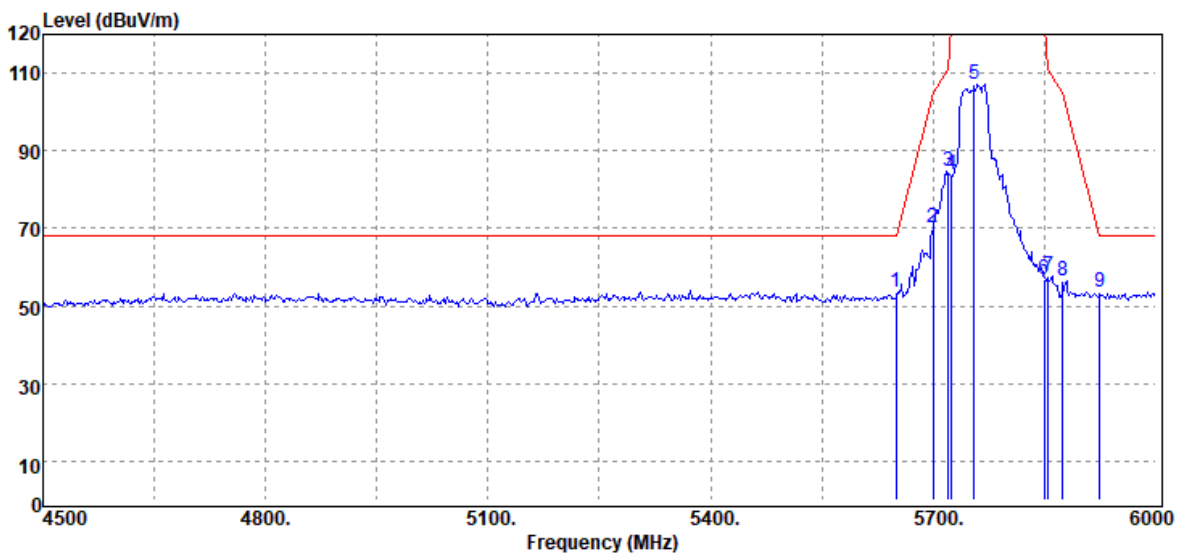

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5650.00	Peak	33.38	20.15	53.53	68.20	-14.67
5700.00	Peak	50.04	20.16	70.20	105.20	-35.00
5720.00	Peak	64.26	20.29	84.55	110.80	-26.25
5725.00	Peak	63.53	20.31	83.84	122.20	-38.36
5755.00	Peak	86.80	20.48	107.28	--	--
5850.00	Peak	36.20	20.73	56.93	122.20	-65.27
5855.00	Peak	36.78	20.76	57.54	110.80	-53.26
5875.00	Peak	35.53	20.84	56.37	105.20	-48.83
5925.00	Peak	32.44	21.06	53.50	68.20	-14.70

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

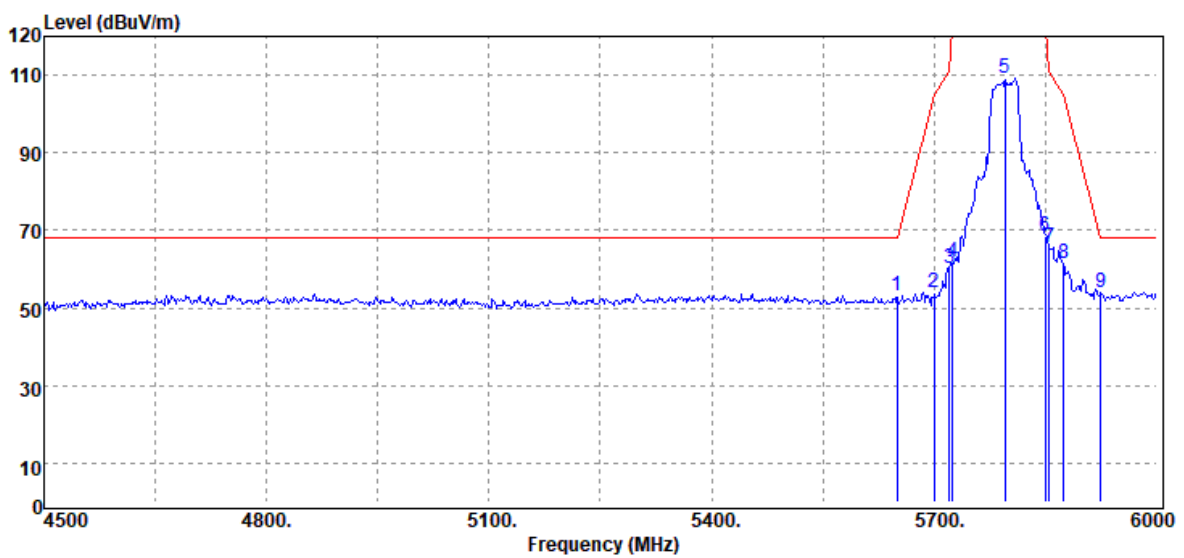

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.18	20.15	53.33	68.20	-14.87
5700.00	Peak	33.85	20.16	54.01	105.20	-51.19
5720.00	Peak	40.06	20.29	60.35	110.80	-50.45
5725.00	Peak	41.38	20.31	61.69	122.20	-60.51
5795.00	Peak	88.48	20.54	109.02	--	--
5850.00	Peak	47.72	20.73	68.45	122.20	-53.75
5855.00	Peak	44.74	20.76	65.50	110.80	-45.30
5875.00	Peak	40.49	20.84	61.33	105.20	-43.87
5925.00	Peak	33.12	21.06	54.18	68.20	-14.02

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

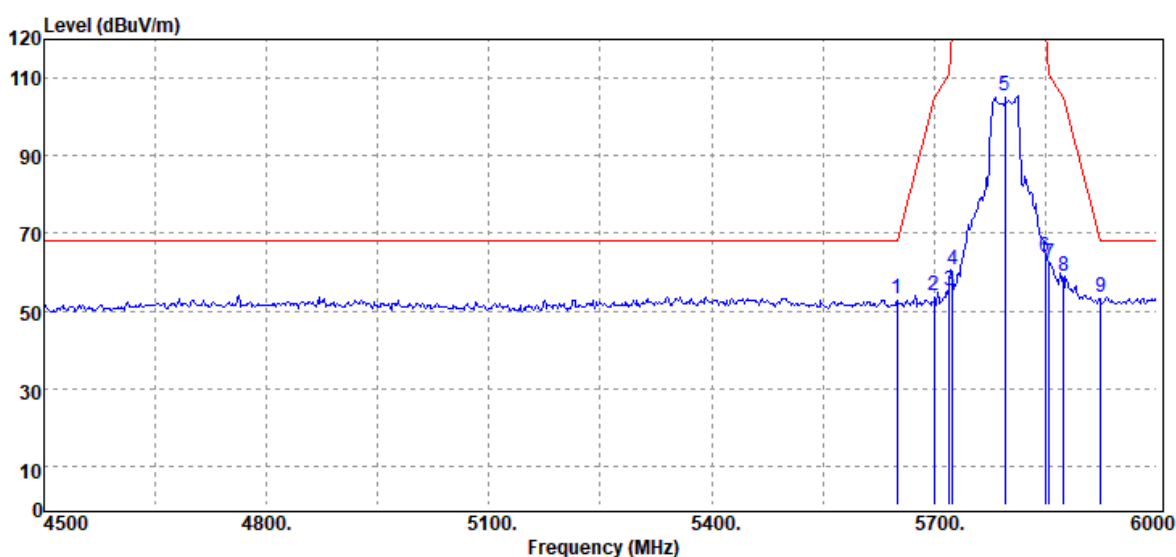

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.00	20.15	53.15	68.20	-15.05
5700.00	Peak	33.69	20.16	53.85	105.20	-51.35
5720.00	Peak	34.82	20.29	55.11	110.80	-55.69
5725.00	Peak	40.21	20.31	60.52	122.20	-61.68
5795.00	Peak	84.77	20.54	105.31	--	--
5850.00	Peak	43.19	20.73	63.92	122.20	-58.28
5855.00	Peak	41.65	20.76	62.41	110.80	-48.39
5875.00	Peak	38.16	20.84	59.00	105.20	-46.20
5925.00	Peak	32.35	21.06	53.41	68.20	-14.79

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

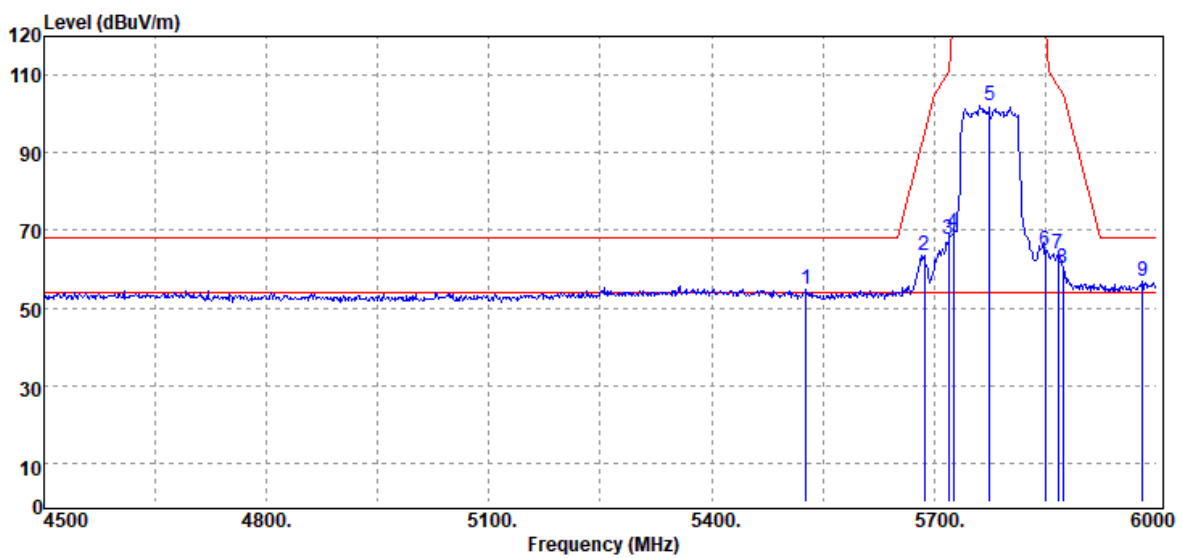

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5527.50	Peak	34.63	20.02	54.65	68.20	-13.55
5686.50	Peak	43.44	20.16	63.60	95.21	-31.61
5719.50	Peak	47.41	20.29	67.70	110.66	-42.96
5725.00	Peak	49.14	20.32	69.46	122.20	-52.74
5775.00	Peak	81.44	20.51	101.95	--	--
5850.00	Peak	44.10	20.73	64.83	122.20	-57.37
5866.50	Peak	43.31	20.80	64.11	107.58	-43.47
5874.00	Peak	39.19	20.83	60.02	105.48	-45.46
5980.50	Peak	35.56	21.17	56.73	68.20	-11.47

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

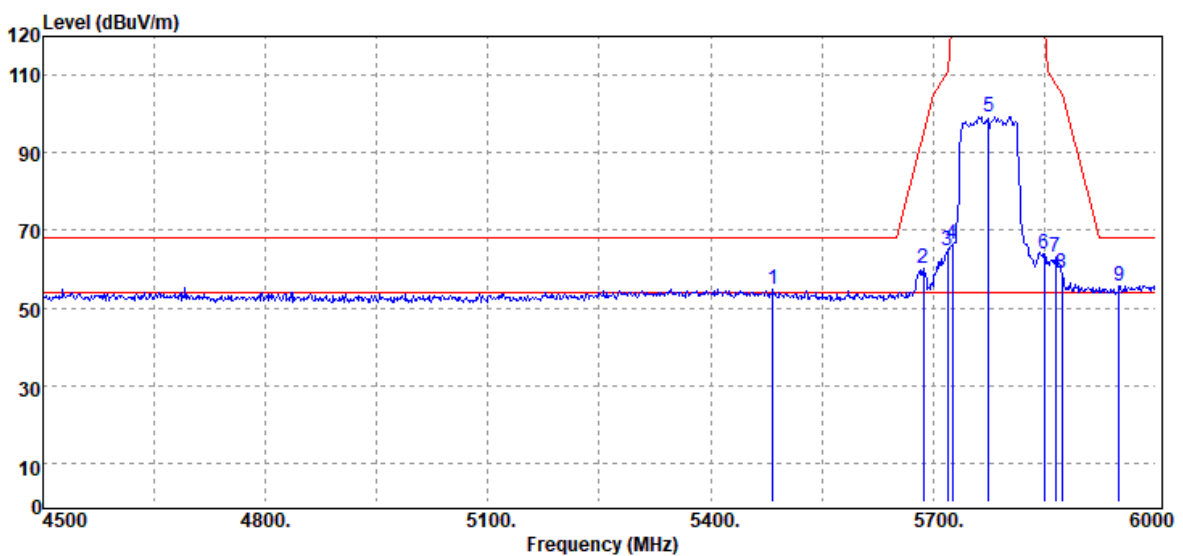

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5484.00	Peak	34.84	20.03	54.87	68.20	-13.33
5686.50	Peak	40.04	20.16	60.20	95.21	-35.01
5719.50	Peak	44.34	20.29	64.63	110.66	-46.03
5725.00	Peak	46.10	20.32	66.42	122.20	-55.78
5775.00	Peak	78.90	20.51	99.41	--	--
5850.00	Peak	43.28	20.73	64.01	122.20	-58.19
5865.00	Peak	42.18	20.80	62.98	108.00	-45.02
5874.00	Peak	37.99	20.83	58.82	105.48	-46.66
5950.50	Peak	34.69	21.16	55.85	68.20	-12.35

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

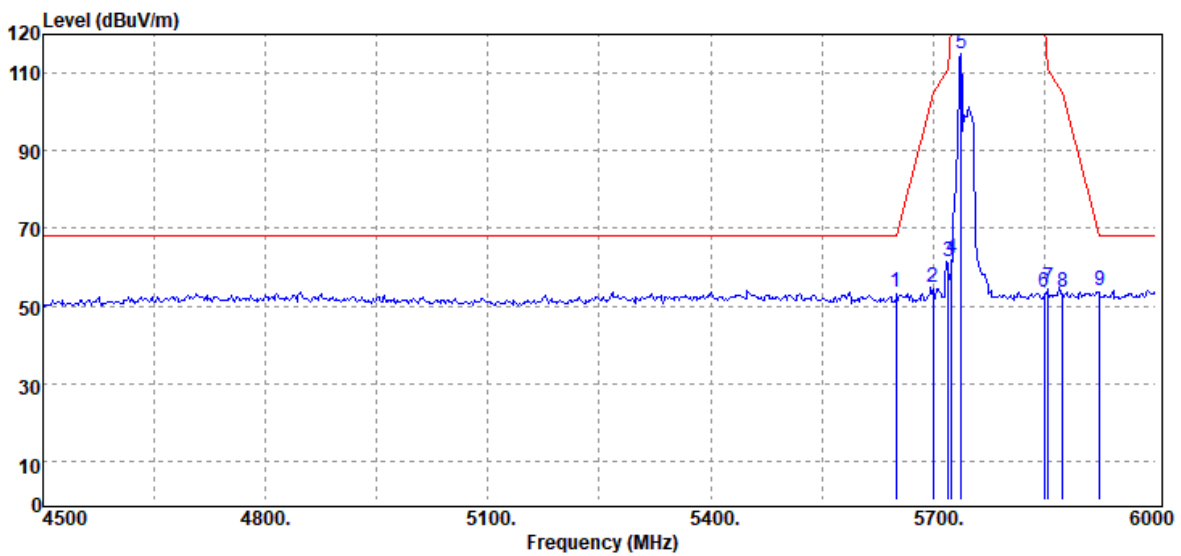

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.28	20.15	53.43	68.20	-14.77
5700.00	Peak	34.72	20.16	54.88	105.20	-50.32
5720.00	Peak	41.36	20.29	61.65	110.80	-49.15
5725.00	Peak	42.10	20.31	62.41	122.20	-59.79
5737.50	Peak	94.80	20.40	115.20	--	--
5850.00	Peak	32.68	20.73	53.41	122.20	-68.79
5855.00	Peak	33.98	20.76	54.74	110.80	-56.06
5875.00	Peak	32.92	20.84	53.76	105.20	-51.44
5925.00	Peak	32.94	21.06	54.00	68.20	-14.20

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

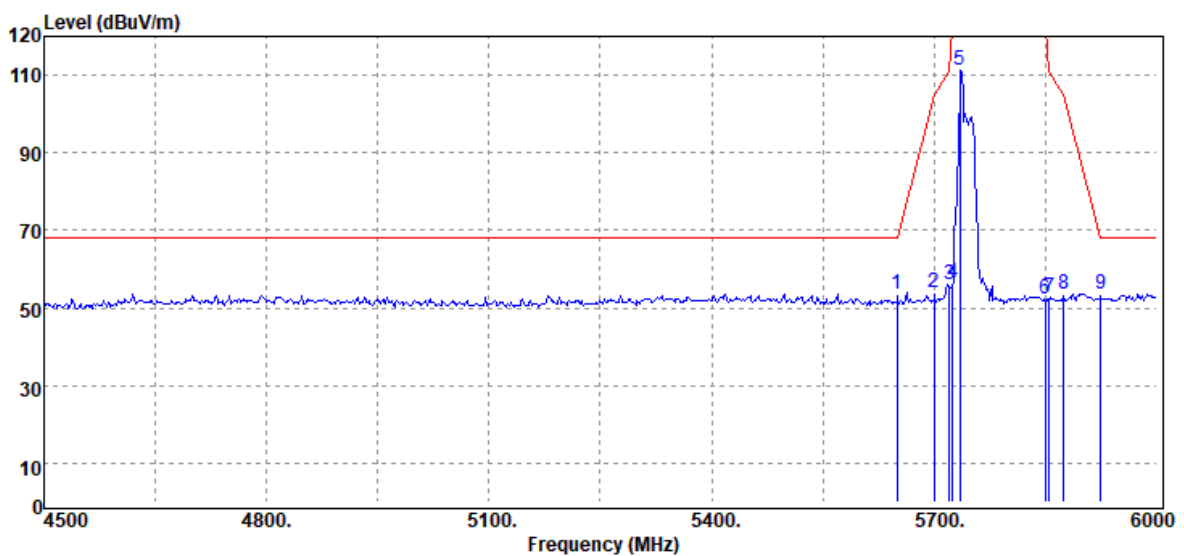

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.37	20.15	53.52	68.20	-14.68
5700.00	Peak	33.69	20.16	53.85	105.20	-51.35
5720.00	Peak	35.94	20.29	56.23	110.80	-54.57
5725.00	Peak	35.99	20.31	56.30	122.20	-65.90
5734.50	Peak	90.83	20.38	111.21	--	--
5850.00	Peak	31.46	20.73	52.19	122.20	-70.01
5855.00	Peak	31.79	20.76	52.55	110.80	-58.25
5875.00	Peak	32.90	20.84	53.74	105.20	-51.46
5925.00	Peak	32.44	21.06	53.50	68.20	-14.70

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

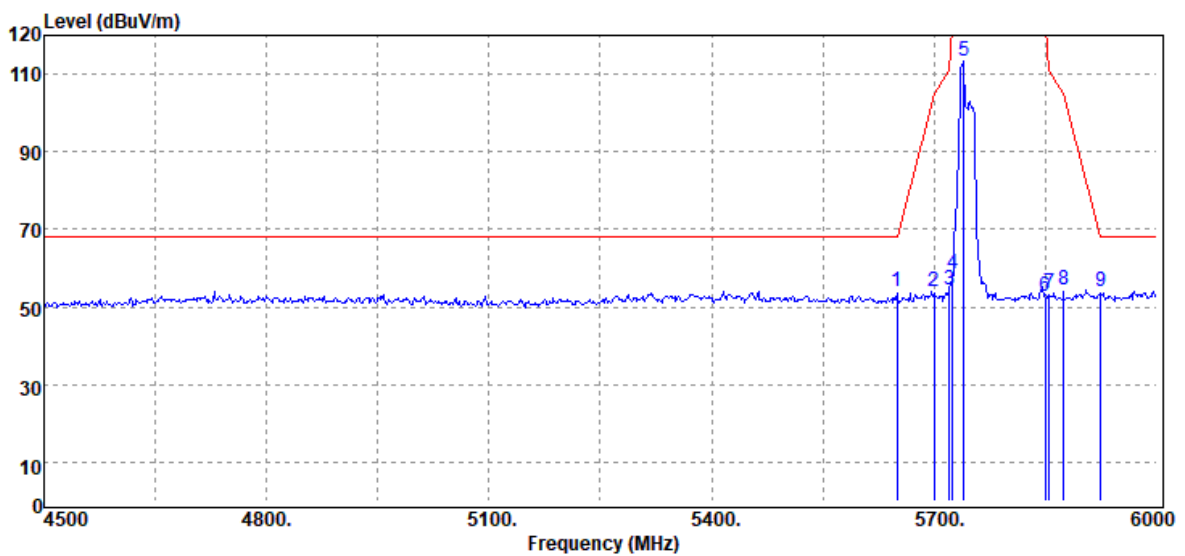

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.85	20.15	54.00	68.20	-14.20
5700.00	Peak	33.72	20.16	53.88	105.20	-51.32
5720.00	Peak	33.99	20.29	54.28	110.80	-56.52
5725.00	Peak	38.38	20.31	58.69	122.20	-63.51
5740.50	Peak	92.78	20.41	113.19	--	--
5850.00	Peak	31.90	20.73	52.63	122.20	-69.57
5855.00	Peak	32.91	20.76	53.67	110.80	-57.13
5875.00	Peak	33.46	20.84	54.30	105.20	-50.90
5925.00	Peak	33.11	21.06	54.17	68.20	-14.03


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

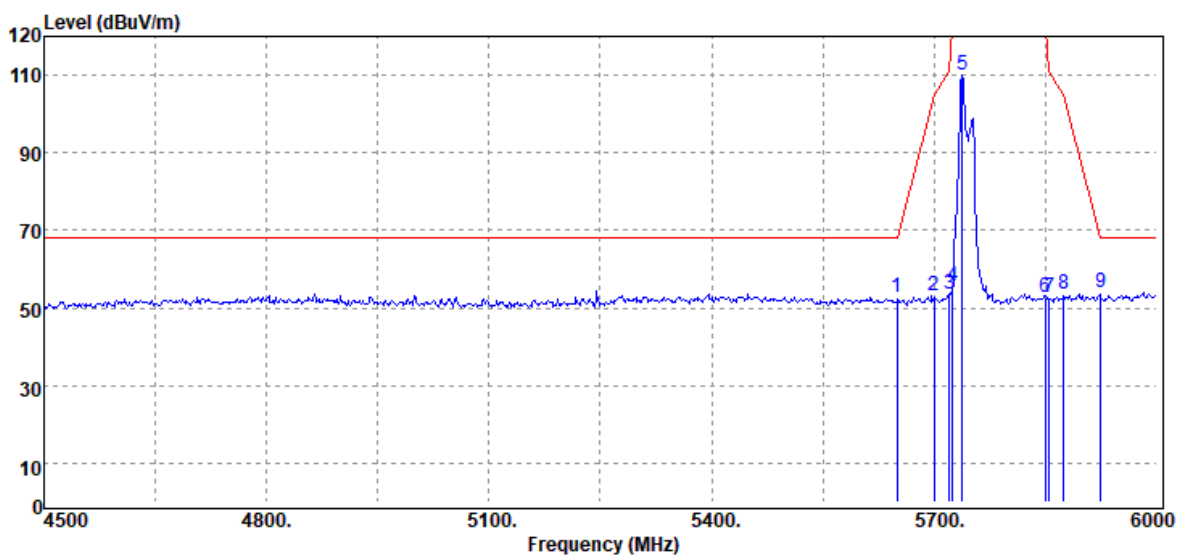

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.67	20.15	52.82	68.20	-15.38
5700.00	Peak	33.12	20.16	53.28	105.20	-51.92
5720.00	Peak	33.29	20.29	53.58	110.80	-57.22
5725.00	Peak	35.25	20.31	55.56	122.20	-66.64
5737.50	Peak	89.83	20.40	110.23	--	--
5850.00	Peak	32.02	20.73	52.75	122.20	-69.45
5855.00	Peak	31.86	20.76	52.62	110.80	-58.18
5875.00	Peak	32.80	20.84	53.64	105.20	-51.56
5925.00	Peak	32.90	21.06	53.96	68.20	-14.24


Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

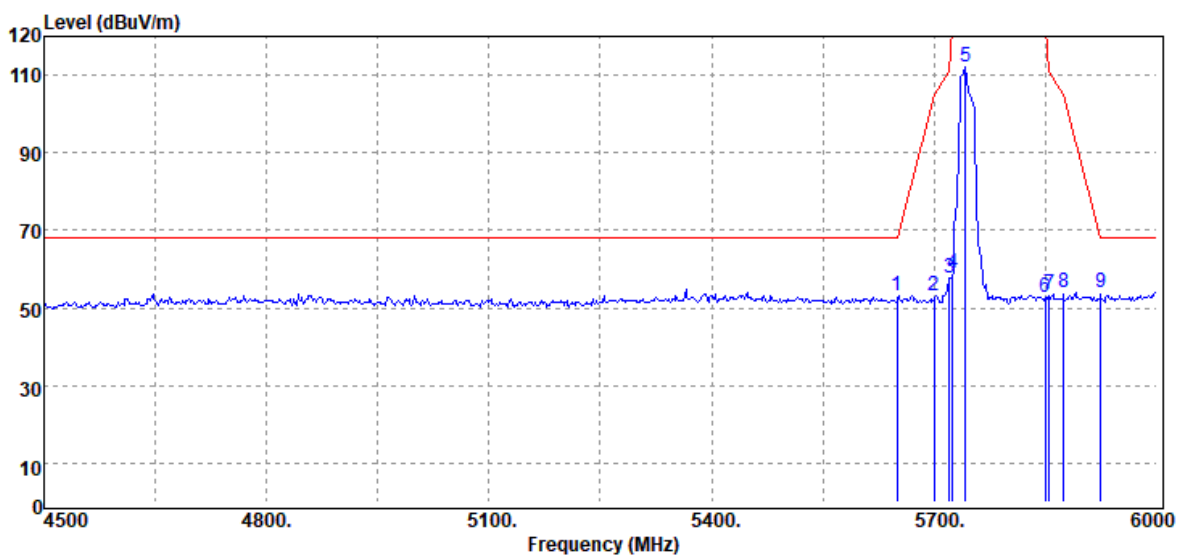

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.18	20.15	53.33	68.20	-14.87
5700.00	Peak	33.16	20.16	53.32	105.20	-51.88
5720.00	Peak	37.38	20.29	57.67	110.80	-53.13
5725.00	Peak	38.45	20.31	58.76	122.20	-63.44
5742.00	Peak	91.54	20.43	111.97	--	--
5850.00	Peak	31.94	20.73	52.67	122.20	-69.53
5855.00	Peak	32.96	20.76	53.72	110.80	-57.08
5875.00	Peak	33.24	20.84	54.08	105.20	-51.12
5925.00	Peak	32.89	21.06	53.95	68.20	-14.25

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

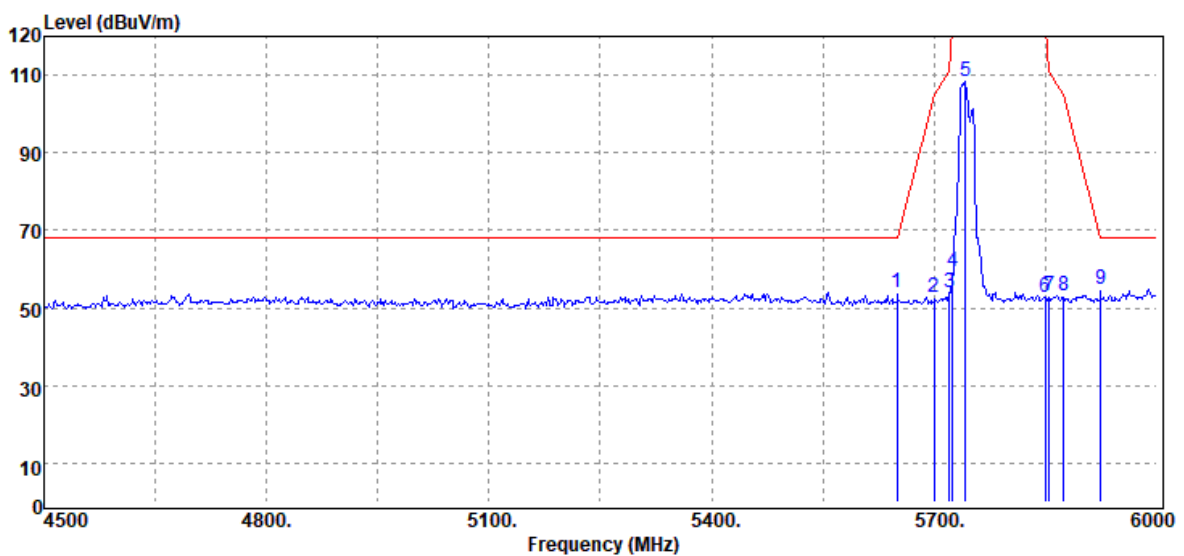

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.85	20.15	54.00	68.20	-14.20
5700.00	Peak	32.51	20.16	52.67	105.20	-52.53
5720.00	Peak	33.70	20.29	53.99	110.80	-56.81
5725.00	Peak	39.04	20.31	59.35	122.20	-62.85
5742.00	Peak	88.02	20.43	108.45	--	--
5850.00	Peak	31.85	20.73	52.58	122.20	-69.62
5855.00	Peak	32.33	20.76	53.09	110.80	-57.71
5875.00	Peak	32.41	20.84	53.25	105.20	-51.95
5925.00	Peak	33.94	21.06	55.00	68.20	-13.20


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

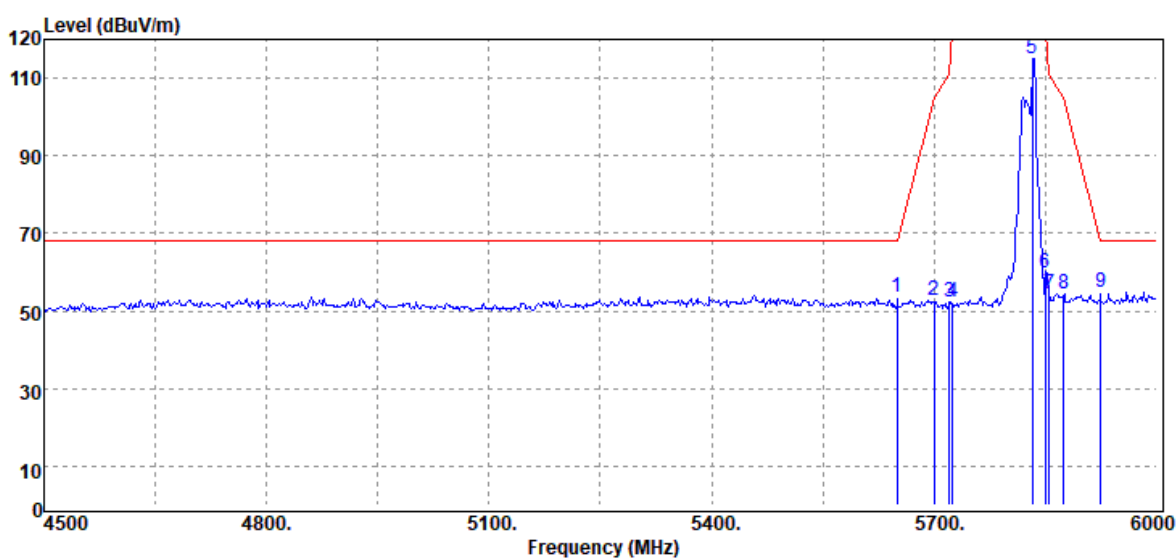

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.38	20.15	53.53	68.20	-14.67
5700.00	Peak	32.71	20.16	52.87	105.20	-52.33
5720.00	Peak	32.15	20.29	52.44	110.80	-58.36
5725.00	Peak	31.88	20.31	52.19	122.20	-70.01
5832.00	Peak	94.54	20.65	115.19	--	--
5850.00	Peak	39.23	20.73	59.96	122.20	-62.24
5855.00	Peak	33.54	20.76	54.30	110.80	-56.50
5875.00	Peak	33.70	20.84	54.54	105.20	-50.66
5925.00	Peak	33.93	21.06	54.99	68.20	-13.21


Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	23.1(°C) / 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

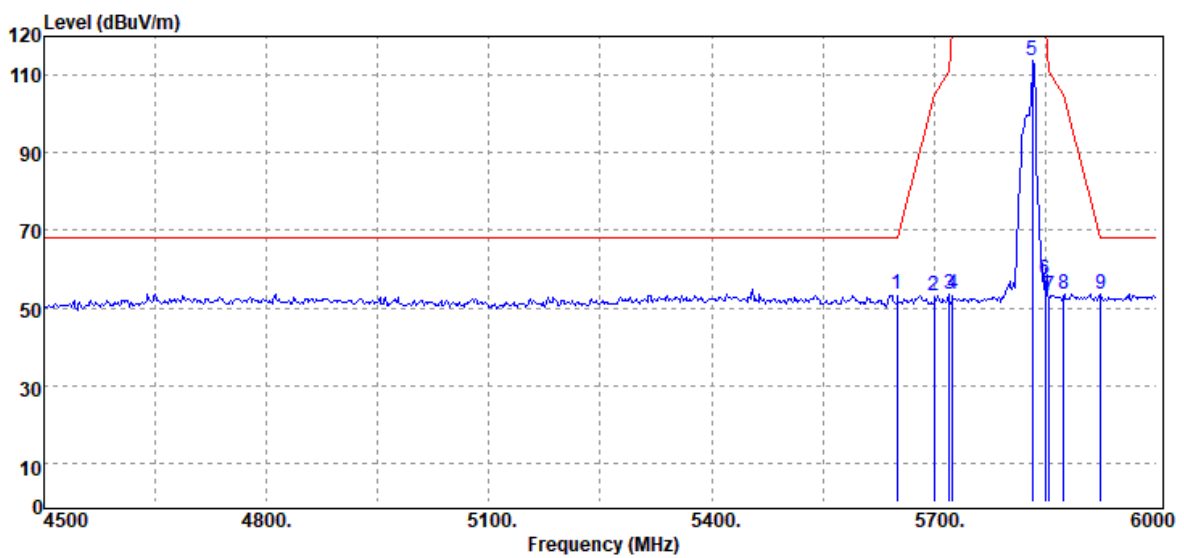

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.42	20.15	53.57	68.20	-14.63
5700.00	Peak	32.85	20.16	53.01	105.20	-52.19
5720.00	Peak	33.29	20.29	53.58	110.80	-57.22
5725.00	Peak	33.27	20.31	53.58	122.20	-68.62
5832.00	Peak	93.19	20.65	113.84	--	--
5850.00	Peak	36.44	20.73	57.17	122.20	-65.03
5855.00	Peak	32.46	20.76	53.22	110.80	-57.58
5875.00	Peak	32.71	20.84	53.55	105.20	-51.65
5925.00	Peak	32.41	21.06	53.47	68.20	-14.73

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

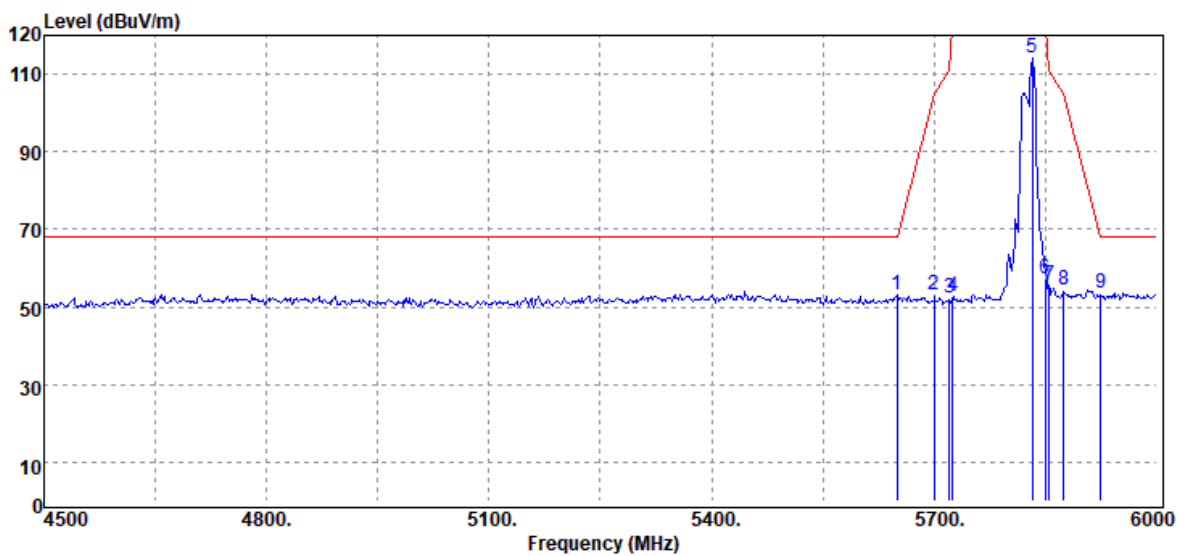

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.98	20.15	53.13	68.20	-15.07
5700.00	Peak	32.97	20.16	53.13	105.20	-52.07
5720.00	Peak	31.88	20.29	52.17	110.80	-58.63
5725.00	Peak	32.27	20.31	52.58	122.20	-69.62
5832.00	Peak	93.58	20.65	114.23	--	--
5850.00	Peak	36.54	20.73	57.27	122.20	-64.93
5855.00	Peak	34.70	20.76	55.46	110.80	-55.34
5875.00	Peak	33.60	20.84	54.44	105.20	-50.76
5925.00	Peak	32.48	21.06	53.54	68.20	-14.66

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

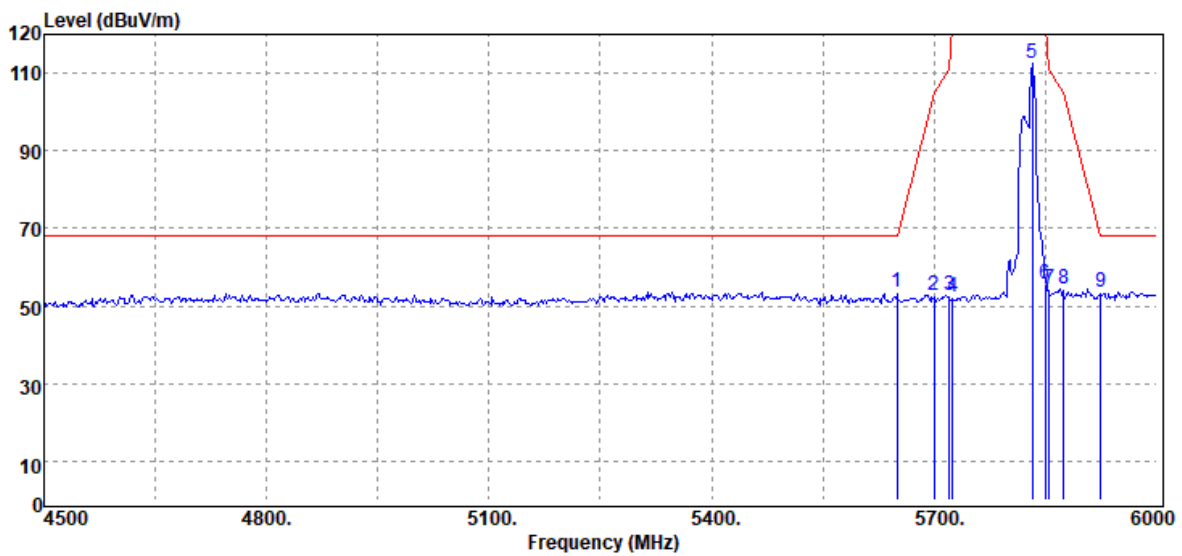

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.58	20.15	53.73	68.20	-14.47
5700.00	Peak	32.76	20.16	52.92	105.20	-52.28
5720.00	Peak	32.52	20.29	52.81	110.80	-57.99
5725.00	Peak	32.03	20.31	52.34	122.20	-69.86
5832.00	Peak	91.74	20.65	112.39	--	--
5850.00	Peak	34.82	20.73	55.55	122.20	-66.65
5855.00	Peak	33.69	20.76	54.45	110.80	-56.35
5875.00	Peak	33.65	20.84	54.49	105.20	-50.71
5925.00	Peak	32.70	21.06	53.76	68.20	-14.44

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

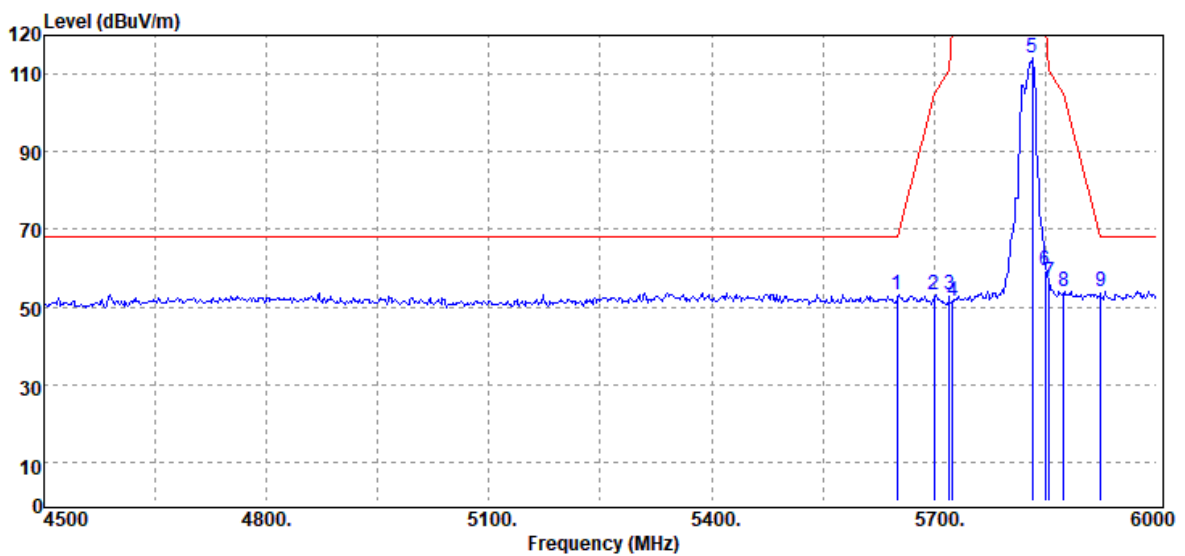

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.20	20.15	53.35	68.20	-14.85
5700.00	Peak	32.91	20.16	53.07	105.20	-52.13
5720.00	Peak	32.75	20.29	53.04	110.80	-57.76
5725.00	Peak	31.23	20.31	51.54	122.20	-70.66
5832.00	Peak	93.54	20.65	114.19	-	-
5850.00	Peak	38.67	20.73	59.40	122.20	-62.80
5855.00	Peak	35.51	20.76	56.27	110.80	-54.53
5875.00	Peak	33.17	20.84	54.01	105.20	-51.19
5925.00	Peak	32.92	21.06	53.98	68.20	-14.22

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

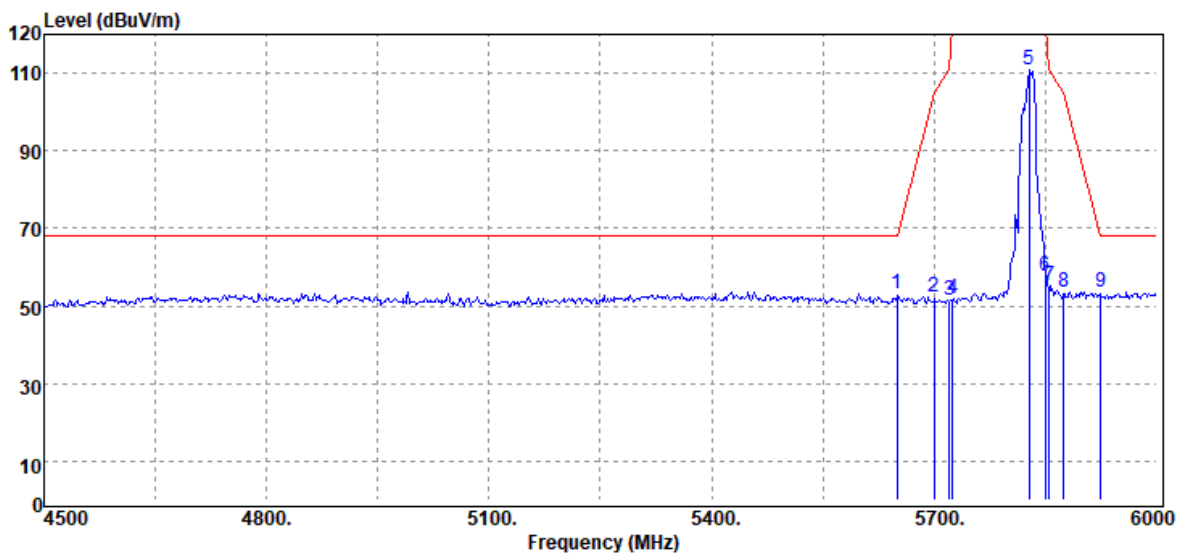

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.00	20.15	53.15	68.20	-15.05
5700.00	Peak	32.22	20.16	52.38	105.20	-52.82
5720.00	Peak	31.20	20.29	51.49	110.80	-59.31
5725.00	Peak	31.46	20.31	51.77	122.20	-70.43
5827.50	Peak	90.02	20.65	110.67	-	-
5850.00	Peak	36.95	20.73	57.68	122.20	-64.52
5855.00	Peak	34.45	20.76	55.21	110.80	-55.59
5875.00	Peak	32.58	20.84	53.42	105.20	-51.78
5925.00	Peak	32.35	21.06	53.41	68.20	-14.79

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

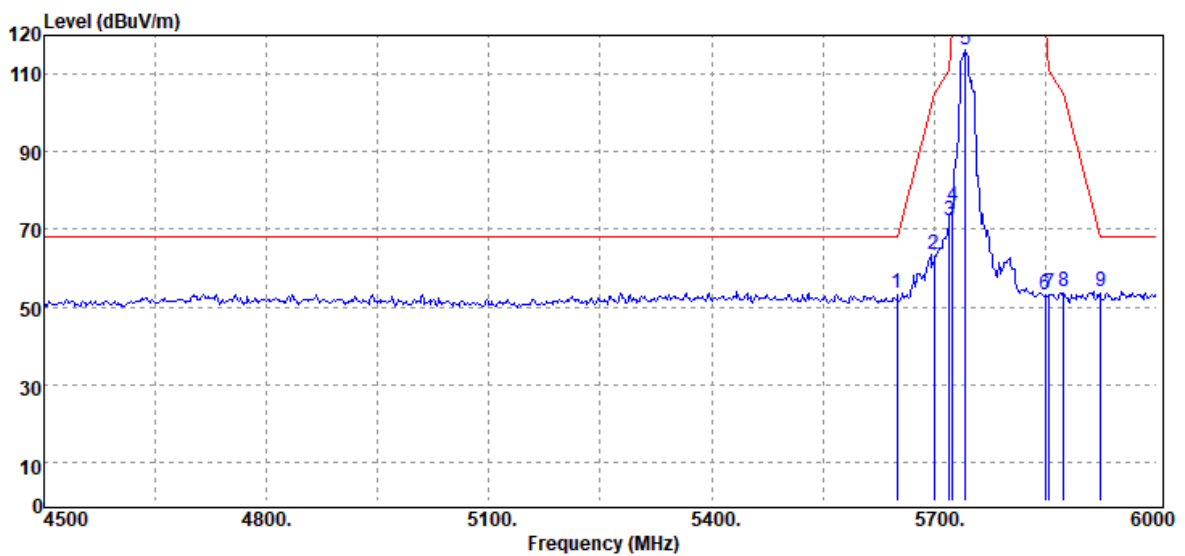

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.36	20.15	53.51	68.20	-14.69
5700.00	Peak	43.43	20.16	63.59	105.20	-41.61
5720.00	Peak	51.99	20.29	72.28	110.80	-38.52
5725.00	Peak	55.56	20.31	75.87	122.20	-46.33
5742.00	Peak	95.66	20.43	116.09	-	-
5850.00	Peak	32.61	20.73	53.34	122.20	-68.86
5855.00	Peak	32.83	20.76	53.59	110.80	-57.21
5875.00	Peak	32.97	20.84	53.81	105.20	-51.39
5925.00	Peak	32.95	21.06	54.01	68.20	-14.19

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

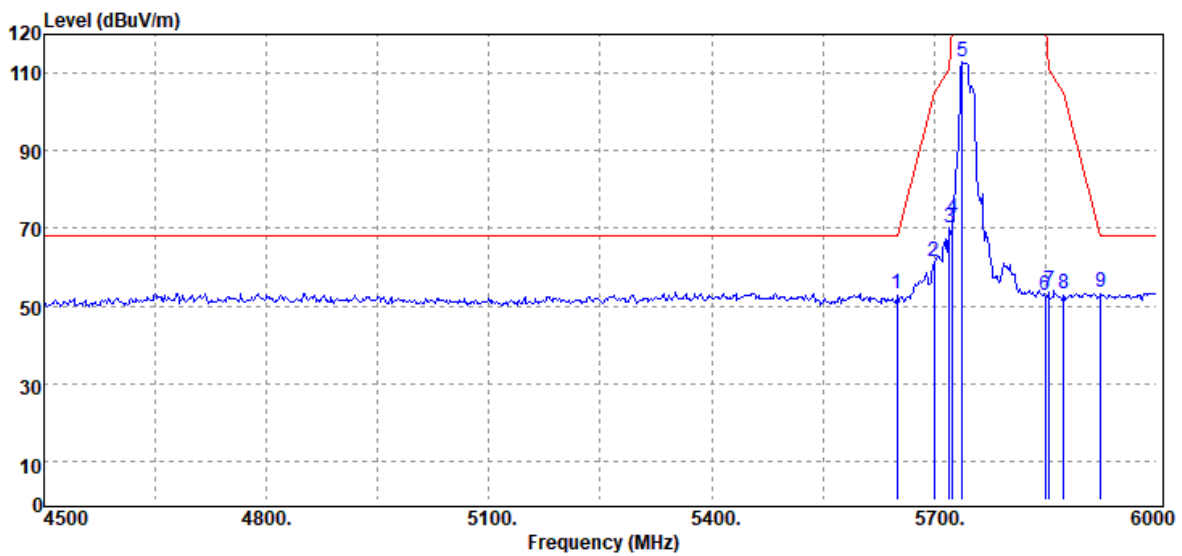

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.92	20.15	53.07	68.20	-15.13
5700.00	Peak	41.11	20.16	61.27	105.20	-43.93
5720.00	Peak	50.05	20.29	70.34	110.80	-40.46
5725.00	Peak	52.29	20.31	72.60	122.20	-49.60
5737.50	Peak	92.46	20.40	112.86	-	-
5850.00	Peak	32.08	20.73	52.81	122.20	-69.39
5855.00	Peak	33.24	20.76	54.00	110.80	-56.80
5875.00	Peak	32.36	20.84	53.20	105.20	-52.00
5925.00	Peak	32.32	21.06	53.38	68.20	-14.82

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

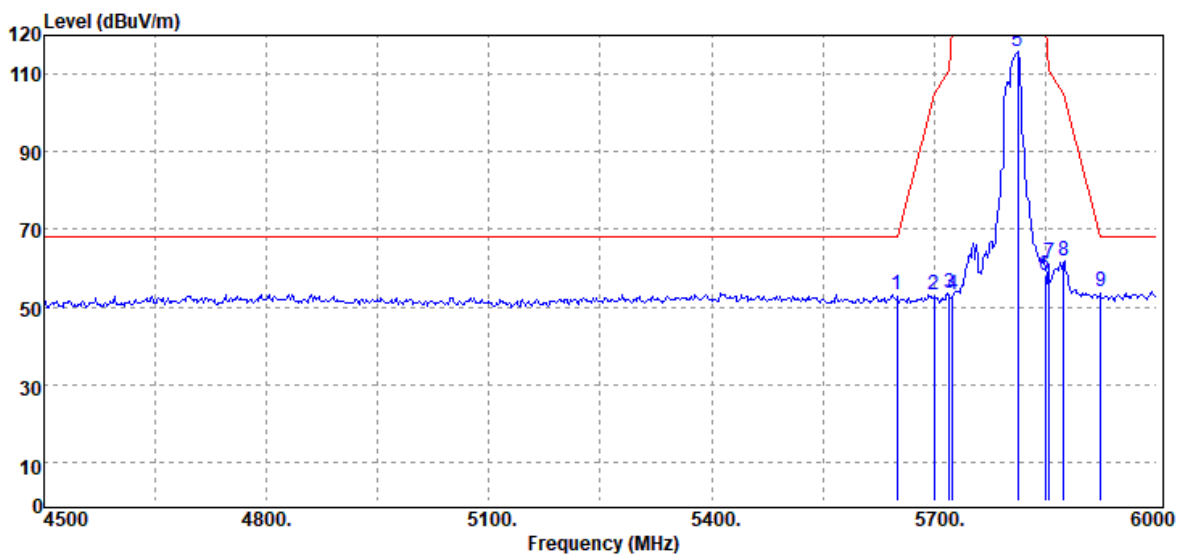

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.86	20.15	53.01	68.20	-15.19
5700.00	Peak	32.78	20.16	52.94	105.20	-52.26
5720.00	Peak	33.40	20.29	53.69	110.80	-57.11
5725.00	Peak	32.78	20.31	53.09	122.20	-69.11
5812.50	Peak	95.12	20.60	115.72	-	-
5850.00	Peak	37.46	20.73	58.19	122.20	-64.01
5855.00	Peak	40.74	20.76	61.50	110.80	-49.30
5875.00	Peak	41.12	20.84	61.96	105.20	-43.24
5925.00	Peak	32.80	21.06	53.86	68.20	-14.34

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

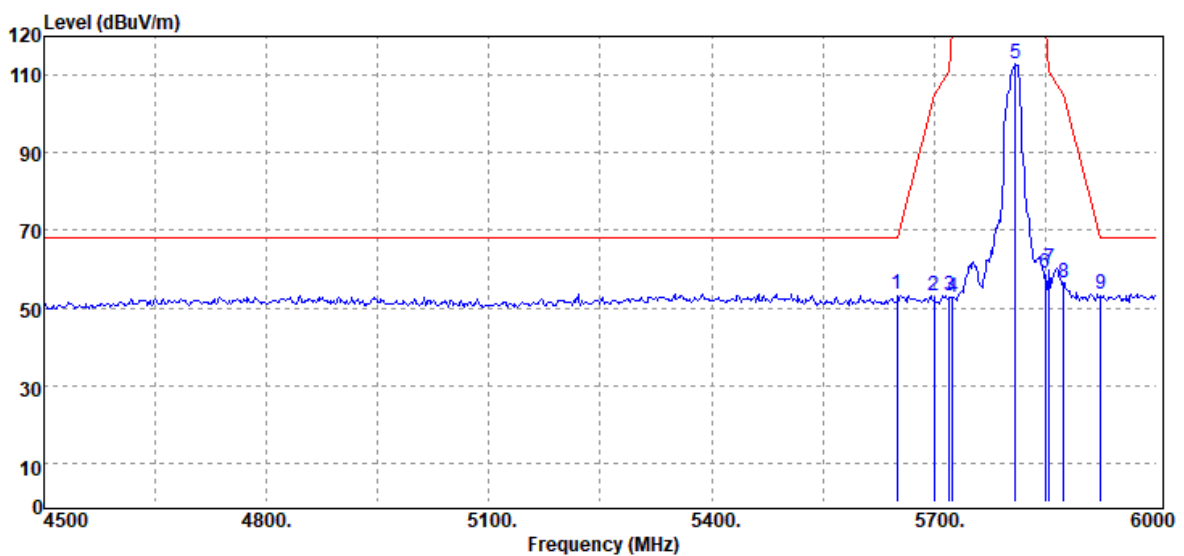

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.49	20.15	53.64	68.20	-14.56
5700.00	Peak	33.20	20.16	53.36	105.20	-51.84
5720.00	Peak	32.73	20.29	53.02	110.80	-57.78
5725.00	Peak	32.29	20.31	52.60	122.20	-69.60
5809.50	Peak	92.52	20.57	113.09	-	-
5850.00	Peak	38.15	20.73	58.88	122.20	-63.32
5855.00	Peak	39.43	20.76	60.19	110.80	-50.61
5875.00	Peak	35.73	20.84	56.57	105.20	-48.63
5925.00	Peak	32.47	21.06	53.53	68.20	-14.67

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5775MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

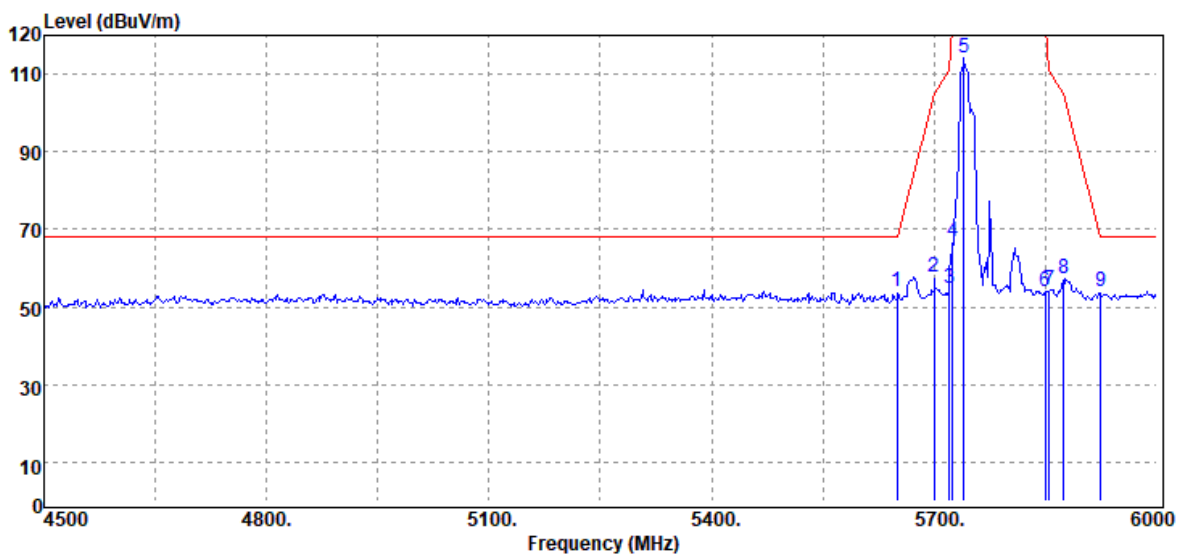

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.80	20.15	53.95	68.20	-14.25
5700.00	Peak	37.43	20.16	57.59	105.20	-47.61
5720.00	Peak	34.41	20.29	54.70	110.80	-56.10
5725.00	Peak	46.43	20.31	66.74	122.20	-55.46
5740.50	Peak	93.80	20.41	114.21	-	-
5850.00	Peak	33.32	20.73	54.05	122.20	-68.15
5855.00	Peak	33.82	20.76	54.58	110.80	-56.22
5875.00	Peak	36.60	20.84	57.44	105.20	-47.76
5925.00	Peak	32.72	21.06	53.78	68.20	-14.42

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5775MHz_106/53	Temp/Hum	23.1(°C) / 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

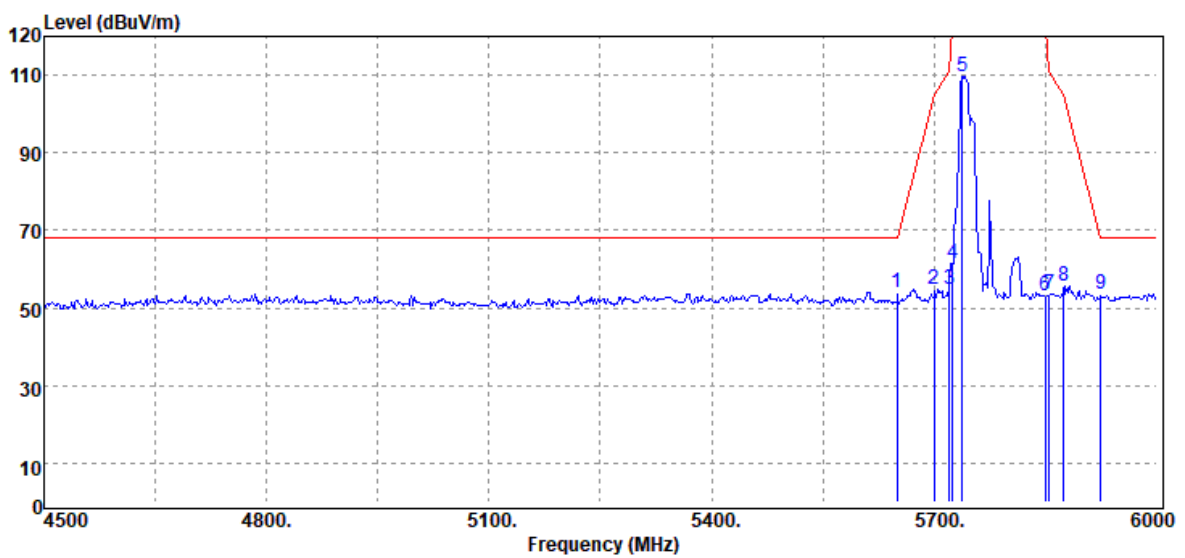

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.95	20.15	54.10	68.20	-14.10
5700.00	Peak	34.72	20.16	54.88	105.20	-50.32
5720.00	Peak	34.68	20.29	54.97	110.80	-55.83
5725.00	Peak	41.34	20.31	61.65	122.20	-60.55
5737.50	Peak	89.33	20.40	109.73	-	-
5850.00	Peak	32.46	20.73	53.19	122.20	-69.01
5855.00	Peak	32.83	20.76	53.59	110.80	-57.21
5875.00	Peak	34.77	20.84	55.61	105.20	-49.59
5925.00	Peak	32.44	21.06	53.50	68.20	-14.70

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	22.8(°C) / 57%RH
Test Item	Band Edge	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

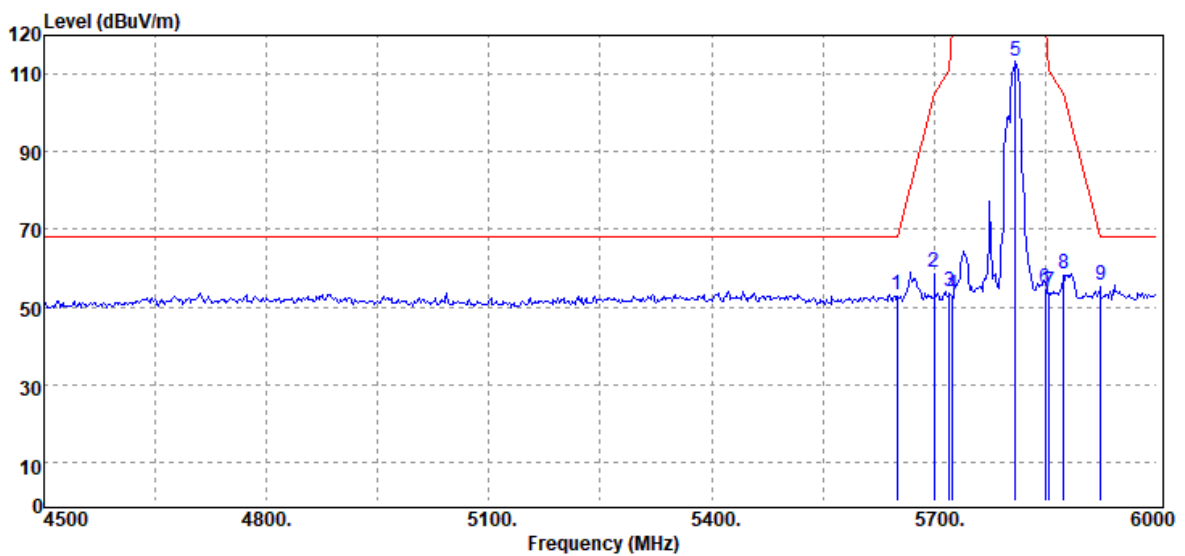

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.10	20.15	53.25	68.20	-14.95
5700.00	Peak	38.82	20.16	58.98	105.20	-46.22
5720.00	Peak	33.88	20.29	54.17	110.80	-56.63
5725.00	Peak	33.03	20.31	53.34	122.20	-68.86
5809.50	Peak	92.73	20.57	113.30	-	-
5850.00	Peak	34.26	20.73	54.99	122.20	-67.21
5855.00	Peak	33.40	20.76	54.16	110.80	-56.64
5875.00	Peak	37.68	20.84	58.52	105.20	-46.68
5925.00	Peak	34.39	21.06	55.45	68.20	-12.75

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	22.8(°C) / 57%RH
Test Item	Band Edge	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

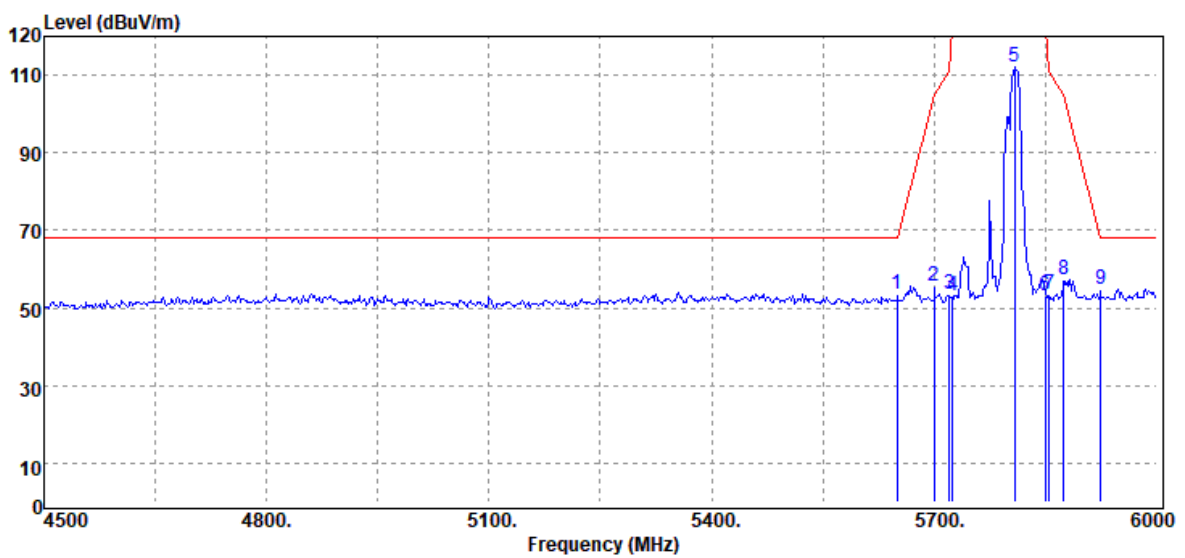


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.57	20.15	53.72	68.20	-14.48
5700.00	Peak	35.42	20.16	55.58	105.20	-49.62
5720.00	Peak	33.47	20.29	53.76	110.80	-57.04
5725.00	Peak	32.79	20.31	53.10	122.20	-69.10
5808.00	Peak	91.62	20.57	112.19	-	-
5850.00	Peak	32.60	20.73	53.33	122.20	-68.87
5855.00	Peak	32.61	20.76	53.37	110.80	-57.43
5875.00	Peak	36.28	20.84	57.12	105.20	-48.08
5925.00	Peak	33.82	21.06	54.88	68.20	-13.32

Report No.: T210319W02-RP2

Band Edge Test Data (BeamForming Mode)

Test Data for UNII-1


Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	23.1(°C)/ 49%RH
Test Item	Band Edge	Test Date	November 10, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

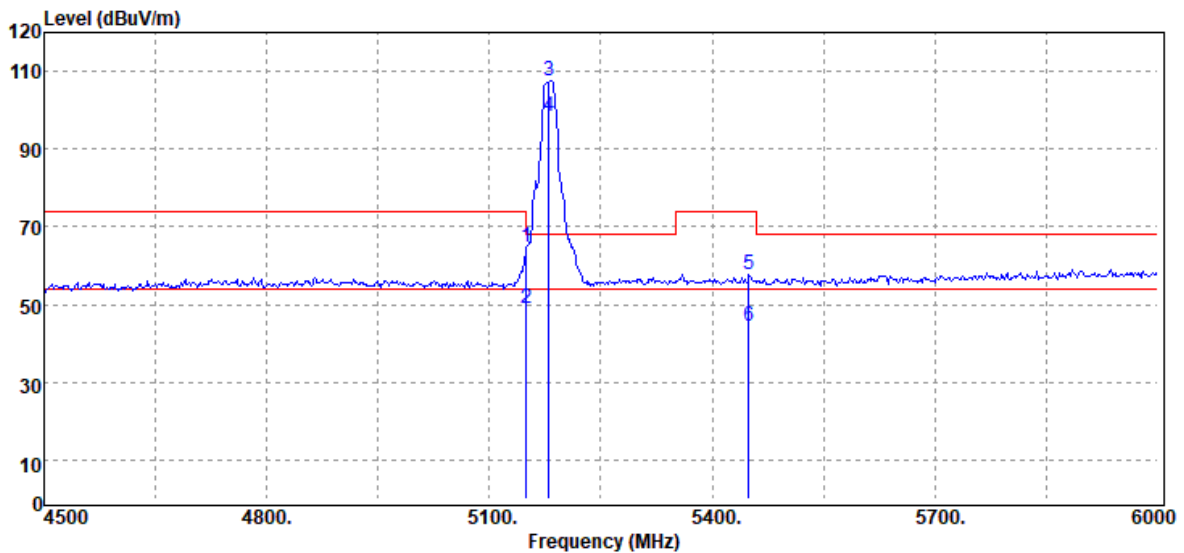

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5149.50	Peak	45.97	19.00	64.97	74.00	-9.03
5149.50	Average	29.88	19.00	48.88	54.00	-5.12
5180.00	Peak	88.48	19.19	107.67	-	-
5180.00	Average	79.09	19.19	98.28	-	-
5449.50	Peak	37.71	20.07	57.78	74.00	-16.22
5449.50	Average	24.49	20.07	44.56	54.00	-9.44

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	23.1(°C) / 49%RH
Test Item	Band Edge	Test Date	November 10, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

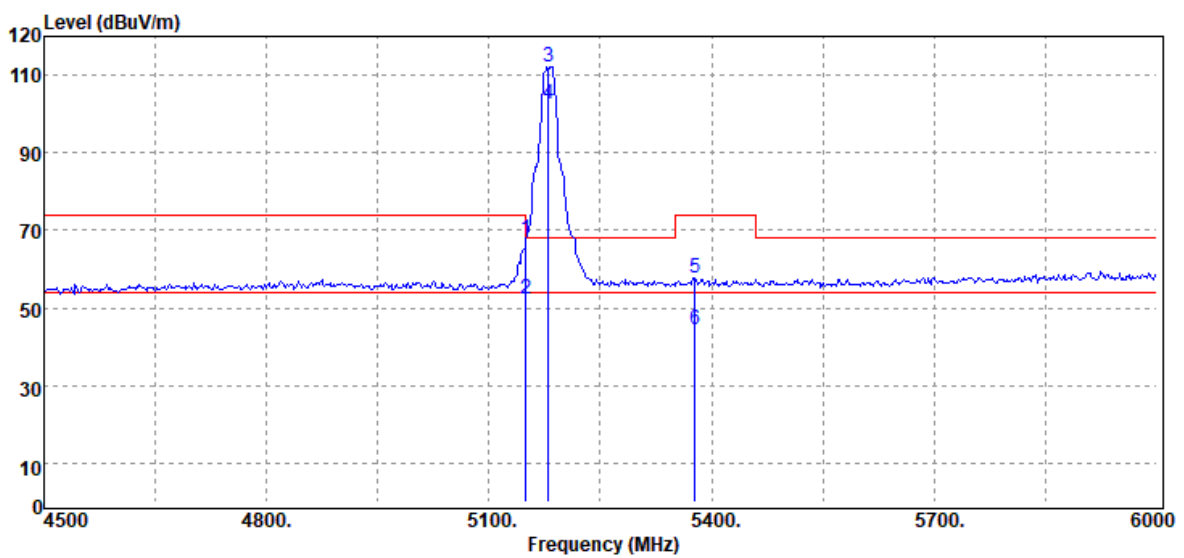

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.50	Peak	48.88	19.00	67.88	74.00	-6.12
5149.50	Average	33.44	19.00	52.44	54.00	-1.56
5180.00	Peak	92.91	19.19	112.10	-	-
5180.00	Average	83.32	19.19	102.51	-	-
5377.50	Peak	37.78	19.96	57.74	74.00	-16.26
5377.50	Average	24.62	19.96	44.58	54.00	-9.42

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5180MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

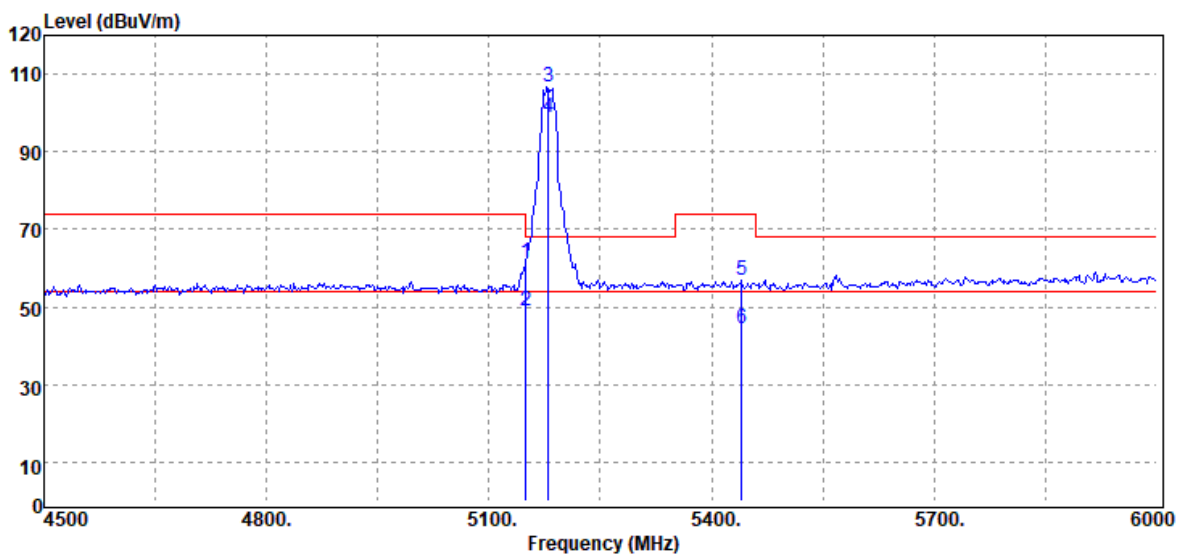

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.50	Peak	42.45	19.00	61.45	74.00	-12.55
5149.50	Average	30.04	19.00	49.04	54.00	-4.96
5180.00	Peak	87.69	19.19	106.88	-	-
5180.00	Average	79.74	19.19	98.93	-	-
5440.50	Peak	36.76	20.07	56.83	74.00	-17.17
5440.50	Average	24.51	20.07	44.58	54.00	-9.42

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5180MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

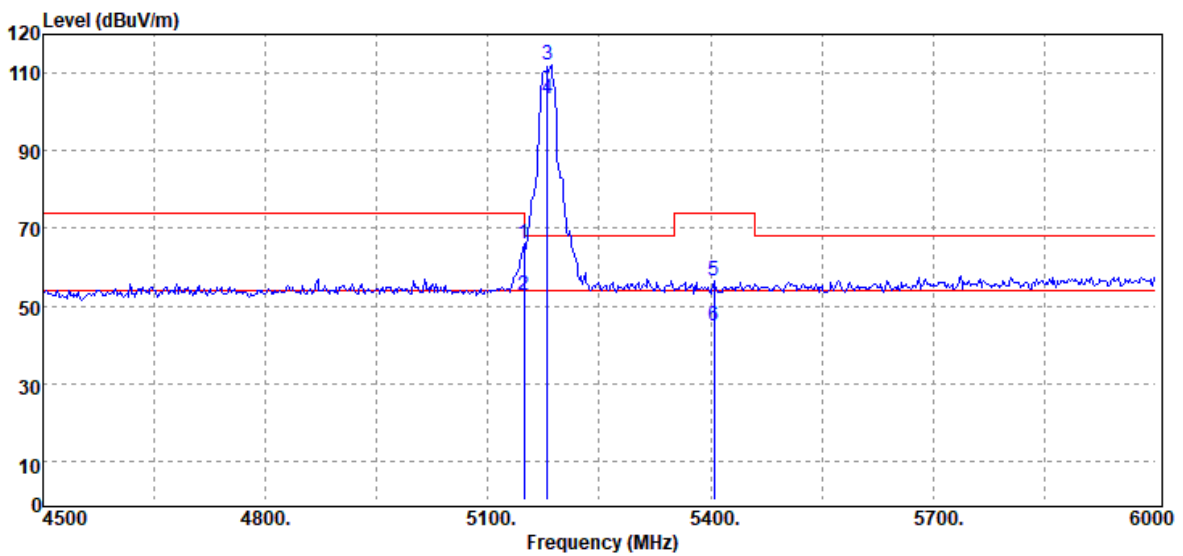

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5148.00	Peak	47.21	19.00	66.21	74.00	-7.79
5148.00	Average	33.85	19.00	52.85	54.00	-1.15
5180.00	Peak	92.77	19.19	111.96	-	-
5180.00	Average	84.28	19.19	103.47	-	-
5404.50	Peak	36.34	20.06	56.40	74.00	-17.60
5404.50	Average	24.79	20.06	44.85	54.00	-9.15

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

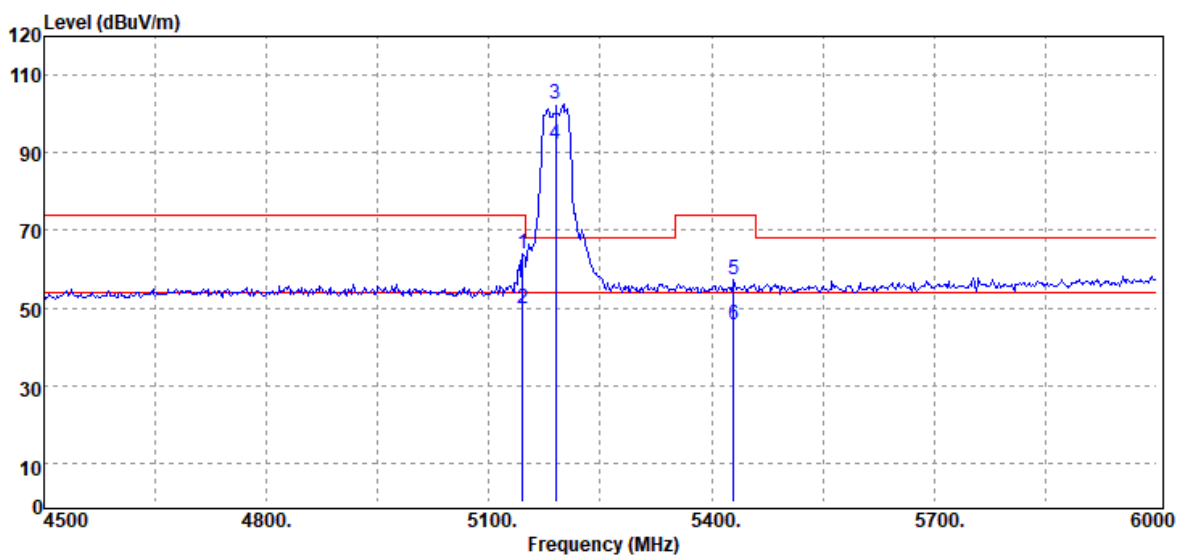

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5145.00	Peak	45.09	18.98	64.07	74.00	-9.93
5145.00	Average	30.80	18.98	49.78	54.00	-4.22
5190.00	Peak	83.35	19.26	102.61	-	-
5190.00	Average	72.75	19.26	92.01	-	-
5430.00	Peak	37.19	20.07	57.26	74.00	-16.74
5430.00	Average	25.70	20.07	45.77	54.00	-8.23

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

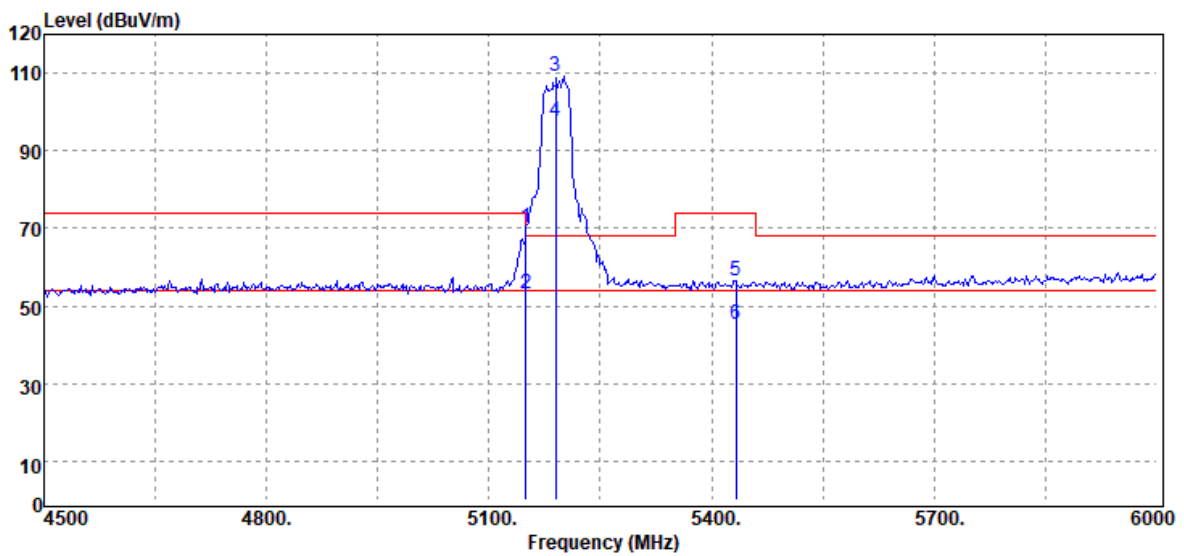

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.50	Peak	51.11	19.00	70.11	74.00	-3.89
5149.50	Average	34.05	19.00	53.05	54.00	-0.95
5190.00	Peak	89.99	19.26	109.25	-	-
5190.00	Average	78.44	19.26	97.70	-	-
5433.00	Peak	36.51	20.06	56.57	74.00	-17.43
5433.00	Average	25.06	20.06	45.12	54.00	-8.88

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

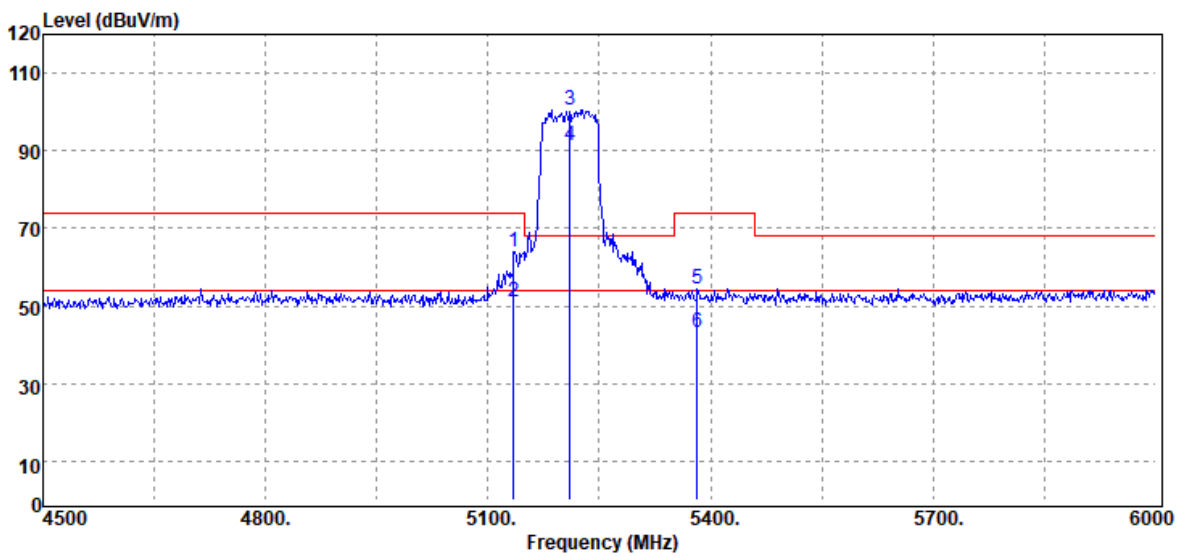

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5134.50	Peak	44.91	18.95	63.86	74.00	-10.14
5134.50	Average	32.06	18.95	51.01	54.00	-2.99
5210.00	Peak	81.04	19.39	100.43	-	-
5210.00	Average	71.84	19.39	91.23	-	-
5382.00	Peak	34.47	19.98	54.45	74.00	-19.55
5382.00	Average	23.19	19.98	43.17	54.00	-10.83

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

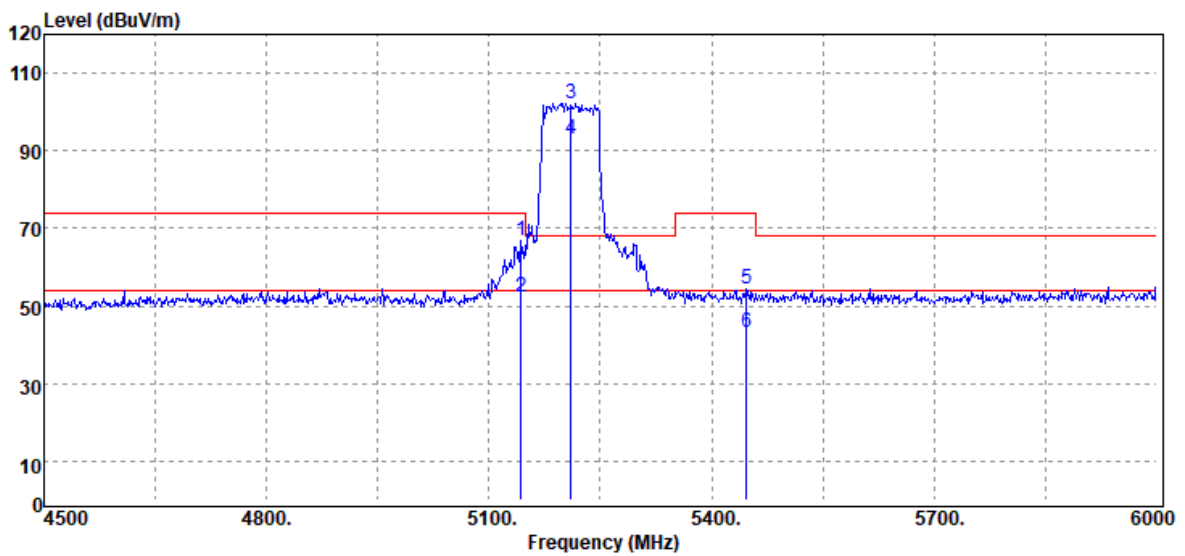

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5143.50	Peak	47.81	18.98	66.79	74.00	-7.21
5143.50	Average	33.51	18.98	52.49	54.00	-1.51
5210.00	Peak	82.79	19.39	102.18	-	-
5210.00	Average	73.44	19.39	92.83	-	-
5446.50	Peak	34.21	20.07	54.28	74.00	-19.72
5446.50	Average	23.14	20.07	43.21	54.00	-10.79

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

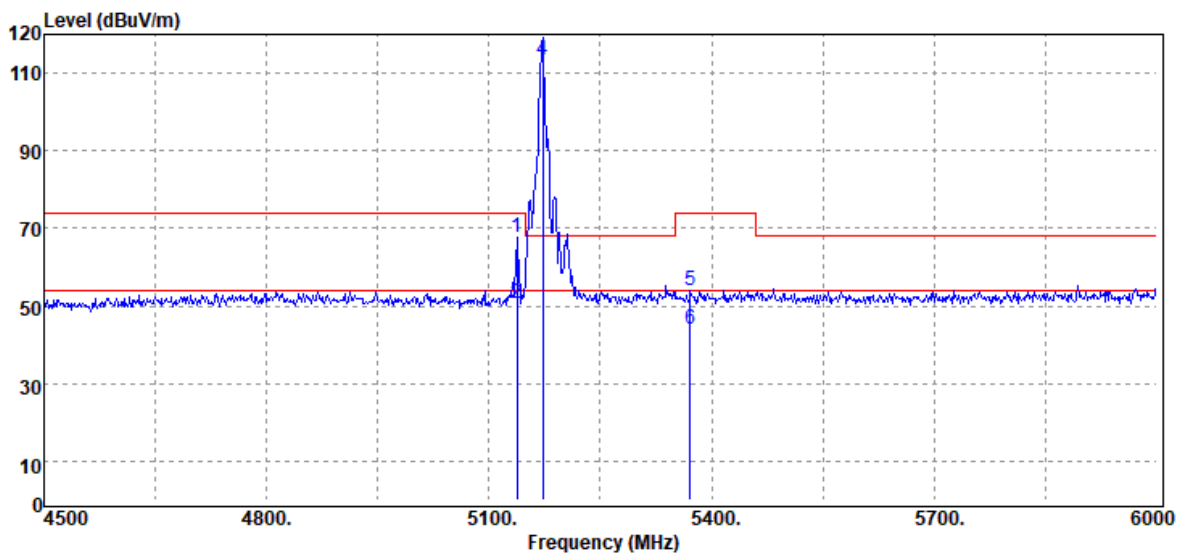

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5137.50	Peak	48.72	18.96	67.68	74.00	-6.32
5137.50	Average	31.68	18.96	50.64	54.00	-3.36
5172.00	Peak	100.08	19.14	119.22	-	-
5172.00	Average	94.09	19.14	113.23	-	-
5371.50	Peak	33.87	19.92	53.79	74.00	-20.21
5371.50	Average	24.11	19.92	44.03	54.00	-9.97

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

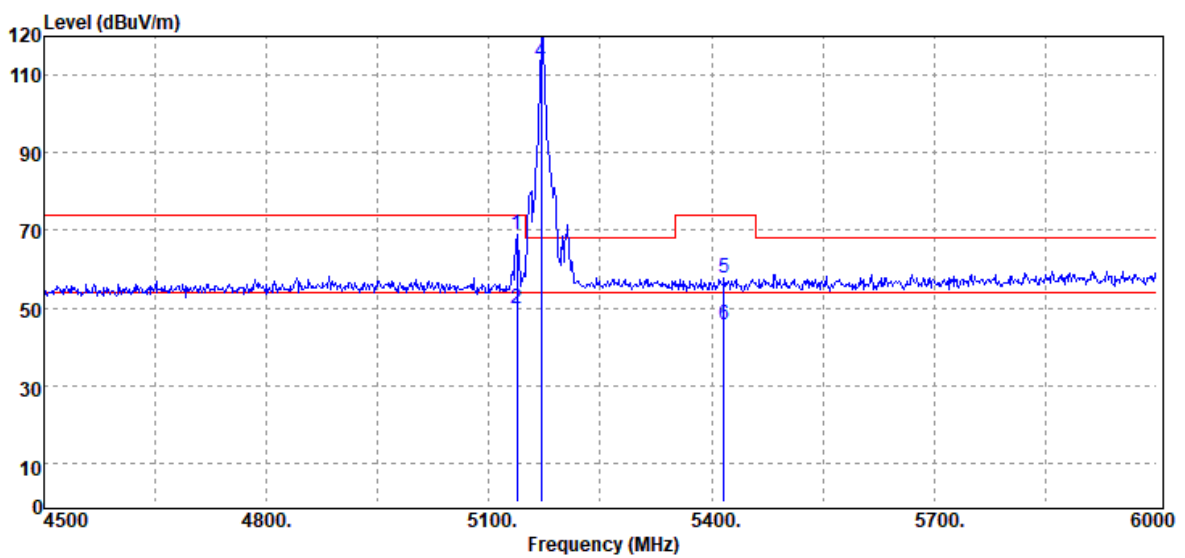

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5137.50	Peak	49.92	18.96	68.88	74.00	-5.12
5137.50	Average	30.77	18.96	49.73	54.00	-4.27
5170.50	Peak	101.82	19.13	120.95	-	-
5170.50	Average	94.32	19.13	113.45	-	-
5416.50	Peak	37.50	20.07	57.57	74.00	-16.43
5416.50	Average	25.70	20.07	45.77	54.00	-8.23

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

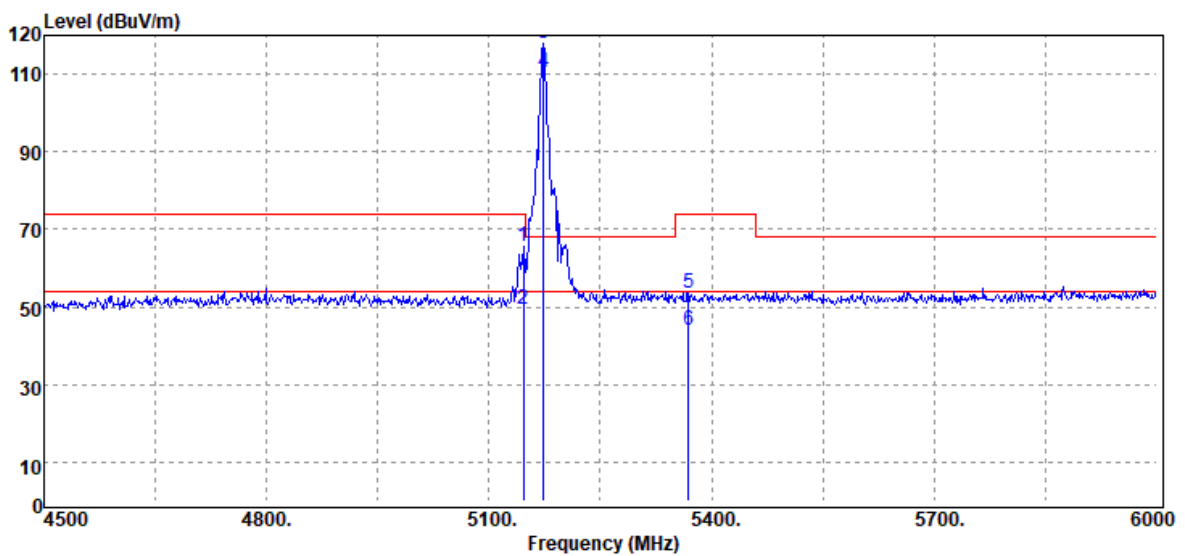

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5146.50	Peak	46.58	18.99	65.57	74.00	-8.43
5146.50	Average	30.36	18.99	49.35	54.00	-4.65
5173.50	Peak	98.83	19.14	117.97	-	-
5173.50	Average	91.45	19.14	110.59	-	-
5368.50	Peak	33.66	19.90	53.56	74.00	-20.44
5368.50	Average	24.09	19.90	43.99	54.00	-10.01

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

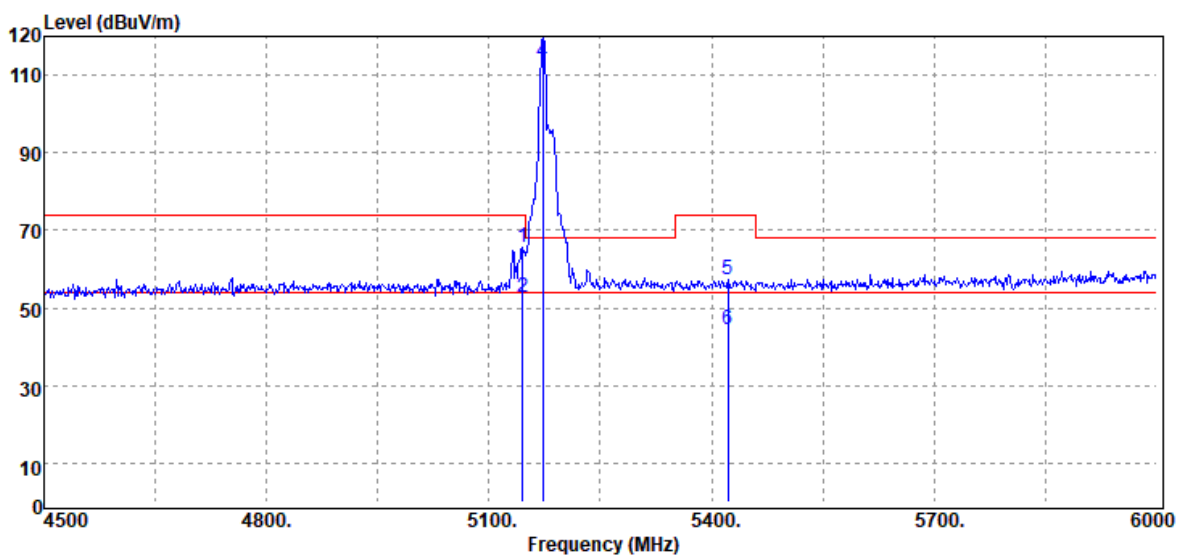

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5145.00	Peak	46.54	18.98	65.52	74.00	-8.48
5145.00	Average	33.81	18.98	52.79	54.00	-1.21
5172.00	Peak	101.19	19.14	120.33	-	-
5172.00	Average	94.17	19.14	113.31	-	-
5422.50	Peak	37.12	20.06	57.18	74.00	-16.82
5422.50	Average	24.43	20.06	44.49	54.00	-9.51

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

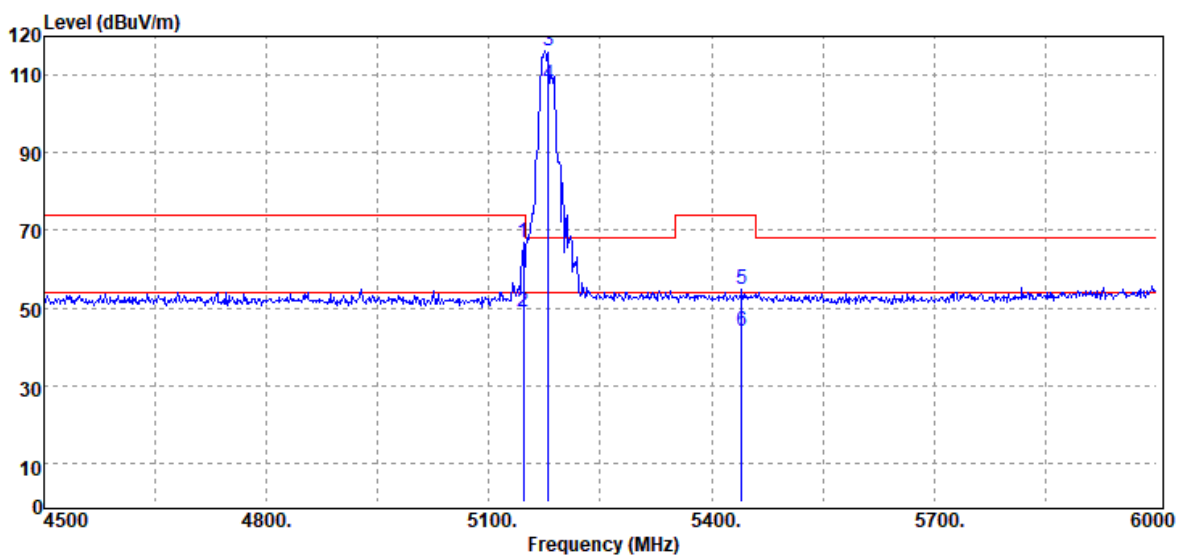

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5146.50	Peak	47.86	18.99	66.85	74.00	-7.15
5146.50	Average	30.06	18.99	49.05	54.00	-4.95
5180.00	Peak	96.94	19.19	116.13	-	-
5180.00	Average	88.34	19.19	107.53	-	-
5440.50	Peak	34.79	20.07	54.86	74.00	-19.14
5440.50	Average	24.10	20.07	44.17	54.00	-9.83

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

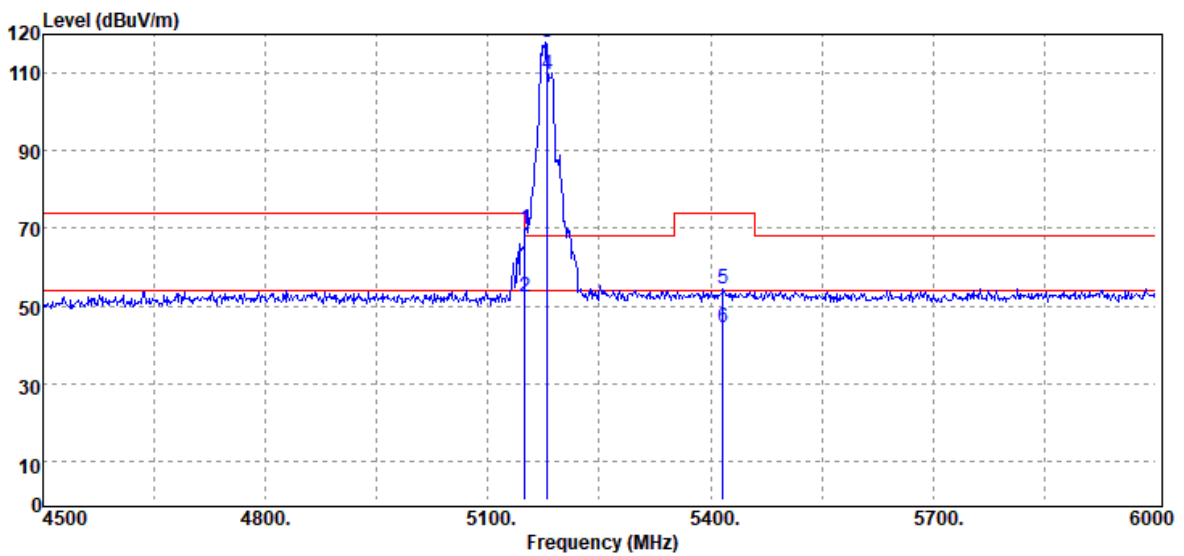

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.50	Peak	50.93	19.00	69.93	74.00	-4.07
5149.50	Average	33.41	19.00	52.41	54.00	-1.59
5180.00	Peak	98.91	19.19	118.10	-	-
5180.00	Average	90.50	19.19	109.69	-	-
5416.50	Peak	34.13	20.07	54.20	74.00	-19.80
5416.50	Average	24.41	20.07	44.48	54.00	-9.52

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5190 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

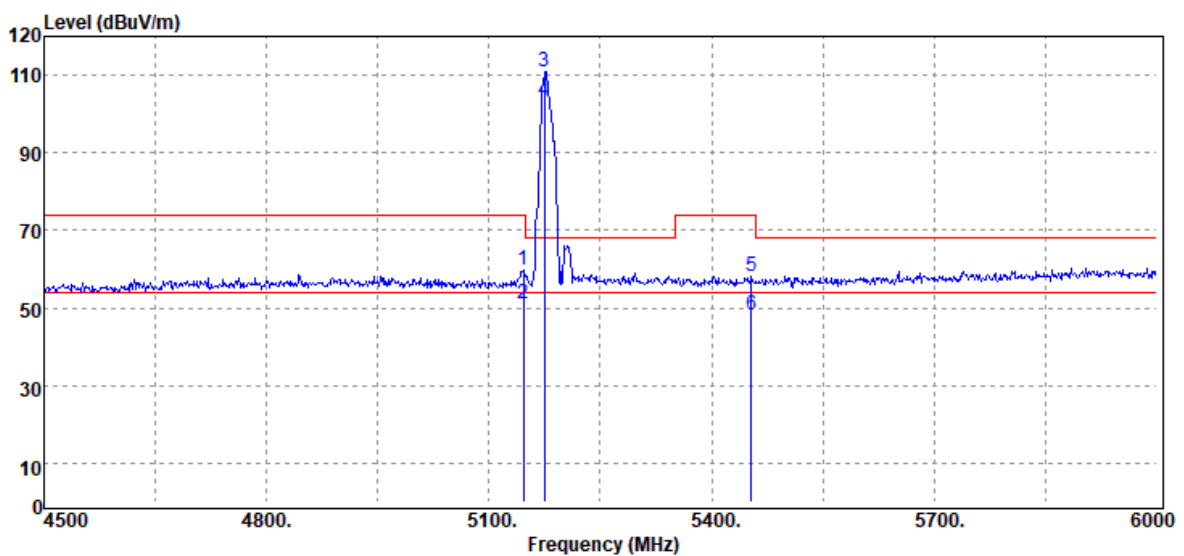

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5146.50	Peak	40.78	18.99	59.77	74.00	-14.23
5146.50	Average	32.16	18.99	51.15	54.00	-2.85
5175.00	Peak	91.90	19.15	111.05	-	-
5175.00	Average	84.07	19.15	103.22	-	-
5454.00	Peak	38.24	20.06	58.30	74.00	-15.70
5454.00	Average	28.23	20.06	48.29	54.00	-5.71

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5190 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

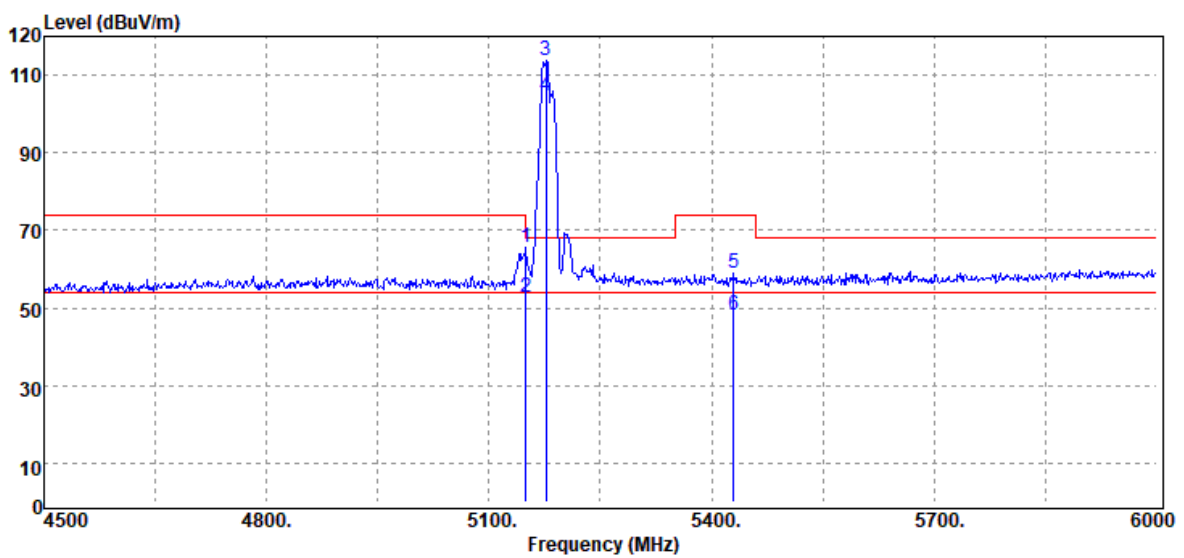

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5149.50	Peak	46.40	19.00	65.40	74.00	-8.60
5149.50	Average	33.65	19.00	52.65	54.00	-1.35
5176.50	Peak	94.51	19.18	113.69	-	-
5176.50	Average	85.30	19.18	104.48	-	-
5430.00	Peak	38.90	20.07	58.97	74.00	-15.03
5430.00	Average	28.28	20.07	48.35	54.00	-5.65

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5210 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

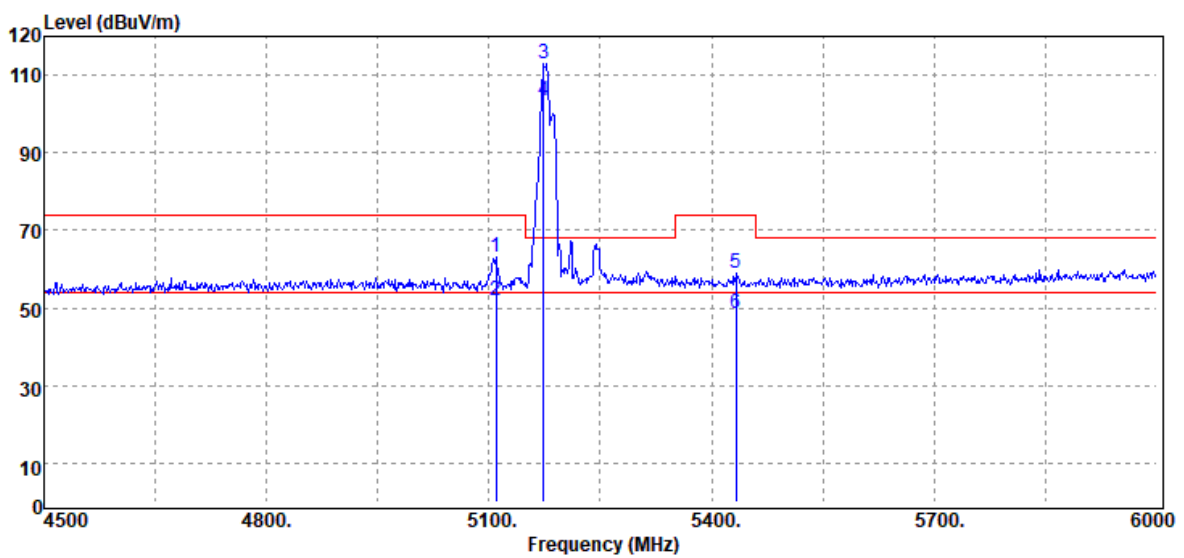

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5109.00	Peak	44.23	18.87	63.10	74.00	-10.90
5109.00	Average	32.83	18.87	51.70	54.00	-2.30
5173.50	Peak	93.62	19.14	112.76	-	-
5173.50	Average	84.31	19.14	103.45	-	-
5433.00	Peak	38.90	20.06	58.96	74.00	-15.04
5433.00	Average	28.68	20.06	48.74	54.00	-5.26

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5210 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

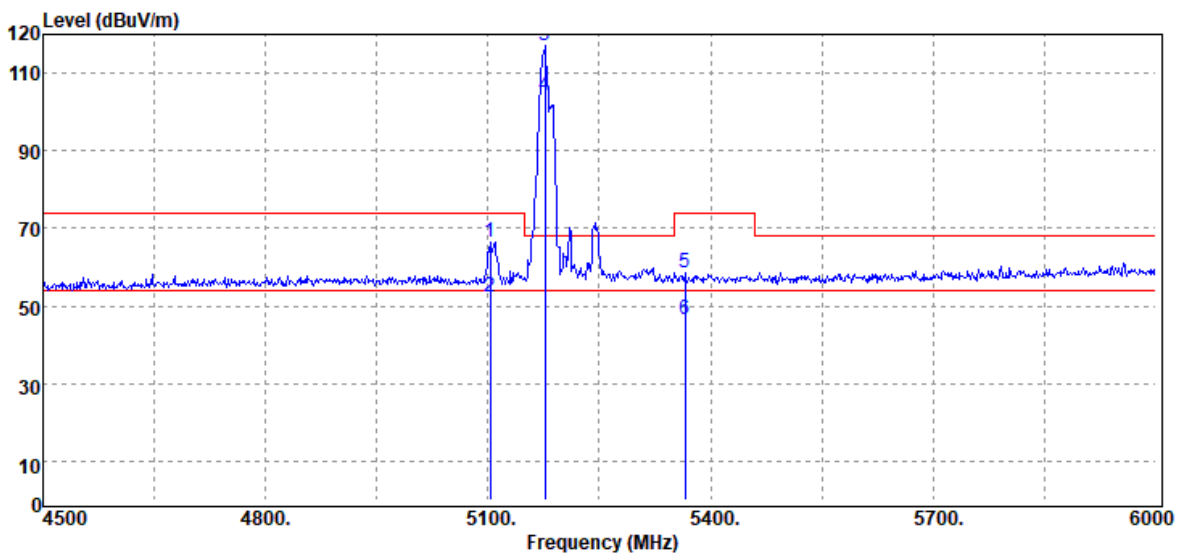


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5103.00	Peak	47.66	18.85	66.51	74.00	-7.49
5103.00	Average	33.27	18.85	52.12	54.00	-1.88
5176.50	Peak	97.77	19.18	116.95	-	-
5176.50	Average	85.17	19.18	104.35	-	-
5365.50	Peak	38.66	19.89	58.55	74.00	-15.45
5365.50	Average	26.55	19.89	46.44	54.00	-7.56

Report No.: T210319W02-RP2

Test Data for UNII-2a


Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

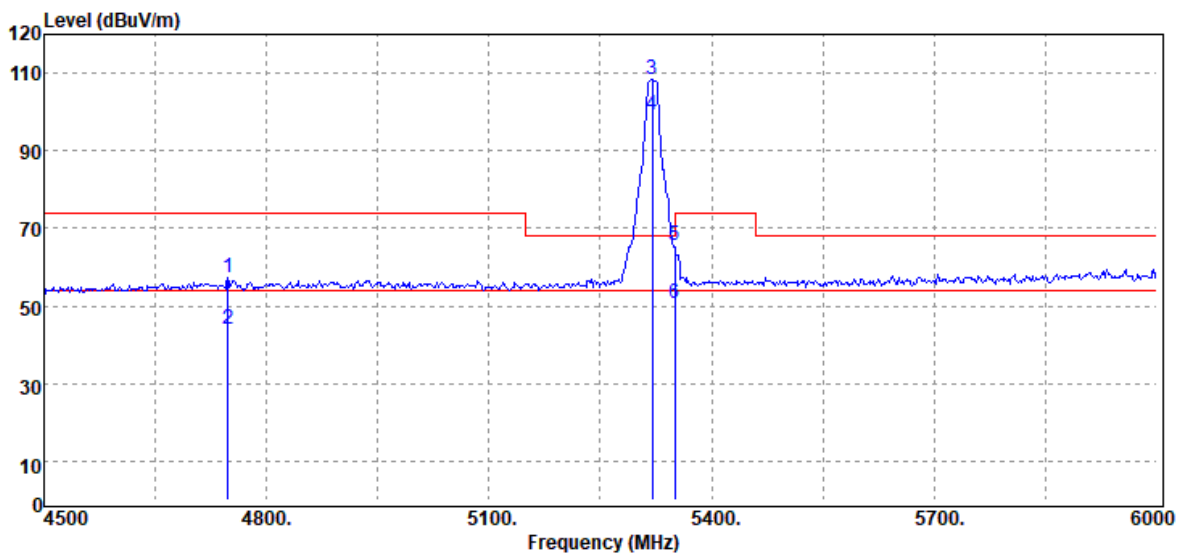

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4747.50	Peak	38.82	18.50	57.32	74.00	-16.68
4747.50	Average	25.35	18.50	43.85	54.00	-10.15
5320.00	Peak	88.71	19.81	108.52	-	-
5320.00	Average	79.36	19.81	99.17	-	-
5350.00	Peak	45.60	19.82	65.42	74.00	-8.58
5350.00	Average	30.98	19.82	50.80	54.00	-3.20

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	22.3(°C)/ 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

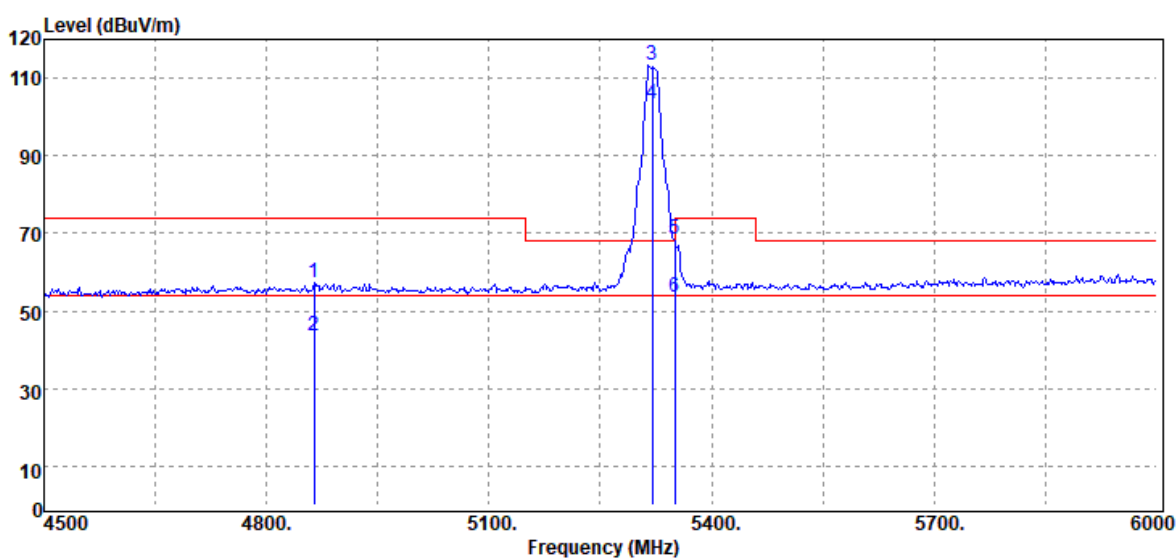

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4864.50	Peak	38.85	18.60	57.45	74.00	-16.55
4864.50	Average	25.13	18.60	43.73	54.00	-10.27
5320.00	Peak	93.37	19.81	113.18	-	-
5320.00	Average	83.57	19.81	103.38	-	-
5350.00	Peak	48.84	19.82	68.66	74.00	-5.34
5350.00	Average	33.55	19.82	53.37	54.00	-0.63

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

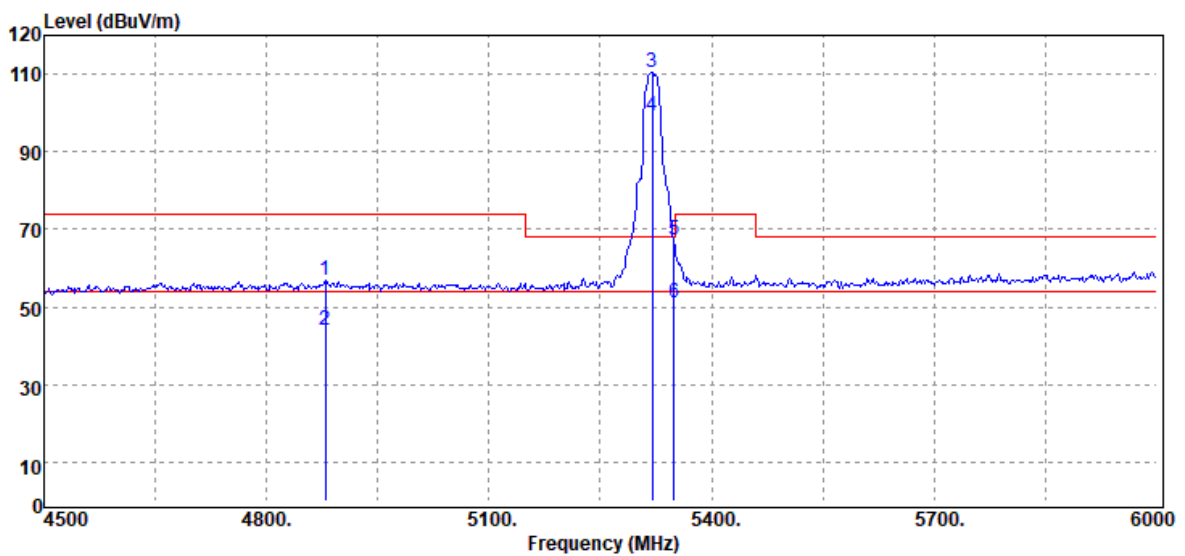

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4879.50	Peak	38.33	18.59	56.92	74.00	-17.08
4879.50	Average	25.27	18.59	43.86	54.00	-10.14
5320.00	Peak	90.65	19.81	110.46	-	-
5320.00	Average	79.25	19.81	99.06	-	-
5349.00	Peak	47.48	19.82	67.30	68.20	-0.90
5349.00	Average	31.29	19.82	51.11	54.00	-2.89

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

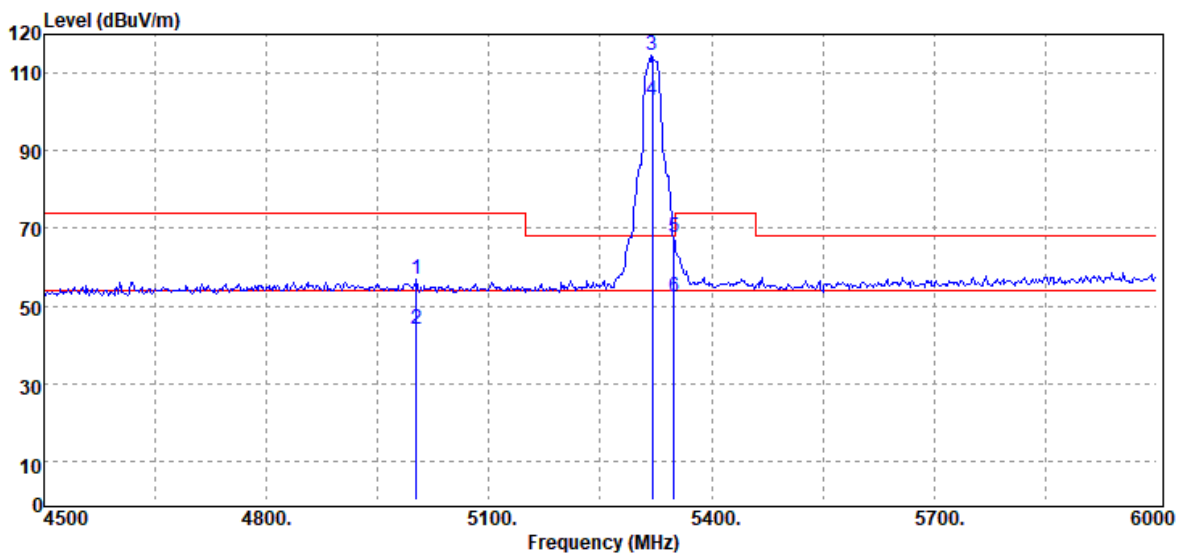

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5002.50	Peak	38.13	18.82	56.95	74.00	-17.05
5002.50	Average	25.11	18.82	43.93	54.00	-10.07
5320.00	Peak	94.65	19.81	114.46	-	-
5320.00	Average	83.11	19.81	102.92	-	-
5349.00	Peak	47.78	19.82	67.60	68.20	-0.60
5349.00	Average	32.65	19.82	52.47	54.00	-1.53

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

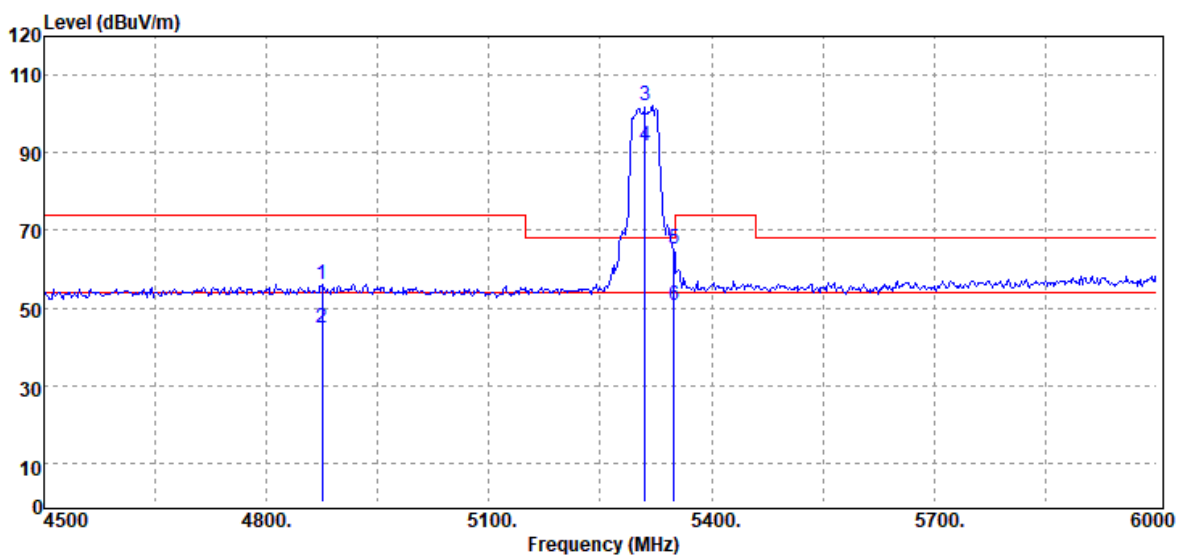

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4875.00	Peak	37.46	18.60	56.06	74.00	-17.94
4875.00	Average	26.14	18.60	44.74	54.00	-9.26
5310.00	Peak	82.48	19.82	102.30	-	-
5310.00	Average	71.87	19.82	91.69	-	-
5349.00	Peak	45.19	19.82	65.01	68.20	-3.19
5349.00	Average	30.73	19.82	50.55	54.00	-3.45

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

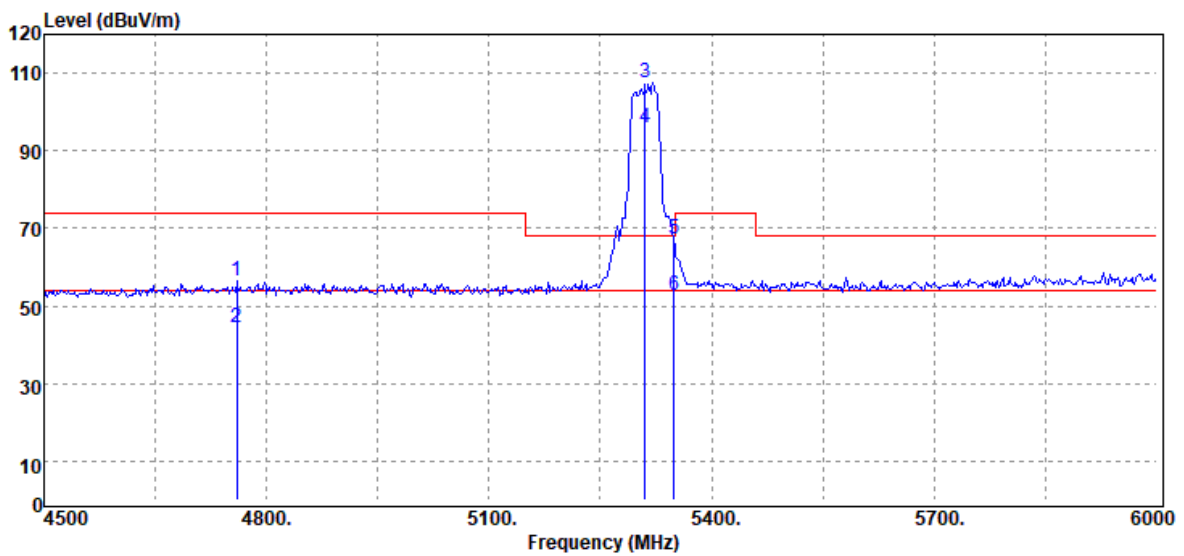

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4759.50	Peak	37.87	18.49	56.36	74.00	-17.64
4759.50	Average	25.92	18.49	44.41	54.00	-9.59
5310.00	Peak	87.80	19.82	107.62	-	-
5310.00	Average	76.29	19.82	96.11	-	-
5349.00	Peak	47.56	19.82	67.38	68.20	-0.82
5349.00	Average	32.96	19.82	52.78	54.00	-1.22


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

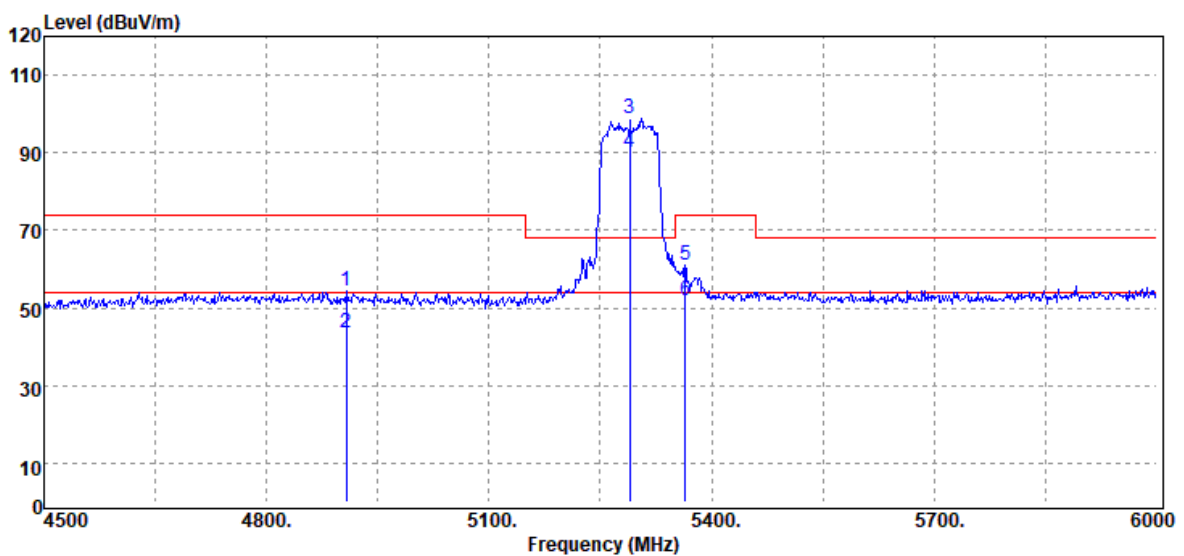

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4908.00	Peak	35.78	18.60	54.38	74.00	-19.62
4908.00	Average	24.95	18.60	43.55	54.00	-10.45
5290.00	Peak	78.94	19.78	98.72	-	-
5290.00	Average	70.24	19.78	90.02	-	-
5364.00	Peak	41.22	19.89	61.11	74.00	-12.89
5364.00	Average	31.81	19.89	51.70	54.00	-2.30


Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

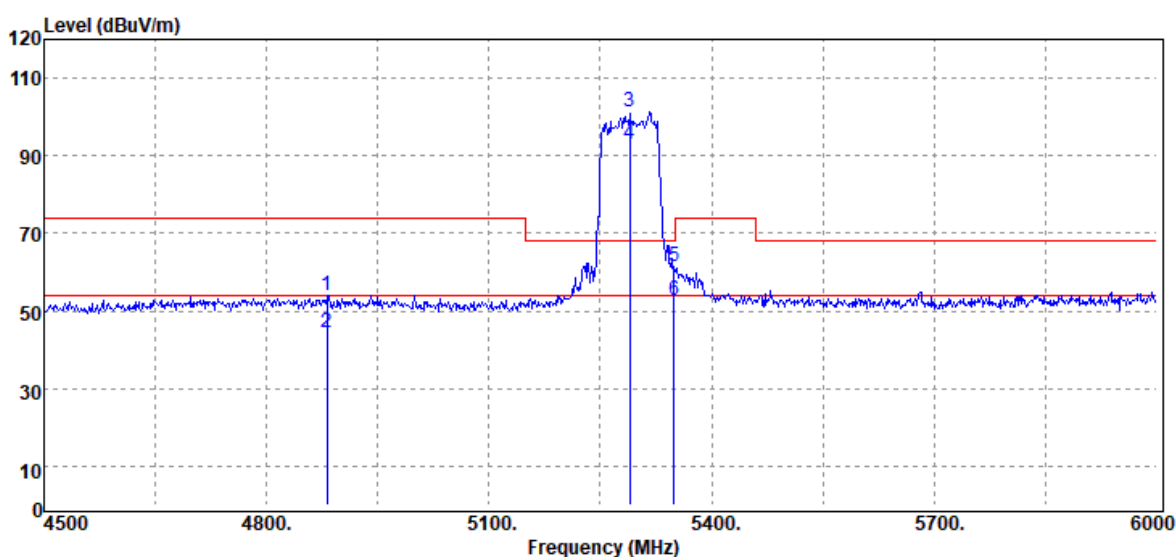

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4881.00	Peak	35.52	18.59	54.11	74.00	-19.89
4881.00	Average	25.70	18.59	44.29	54.00	-9.71
5290.00	Peak	81.73	19.78	101.51	-	-
5290.00	Average	73.12	19.78	92.90	-	-
5349.00	Peak	41.53	19.82	61.35	68.20	-6.85
5349.00	Average	33.03	19.82	52.85	54.00	-1.15

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

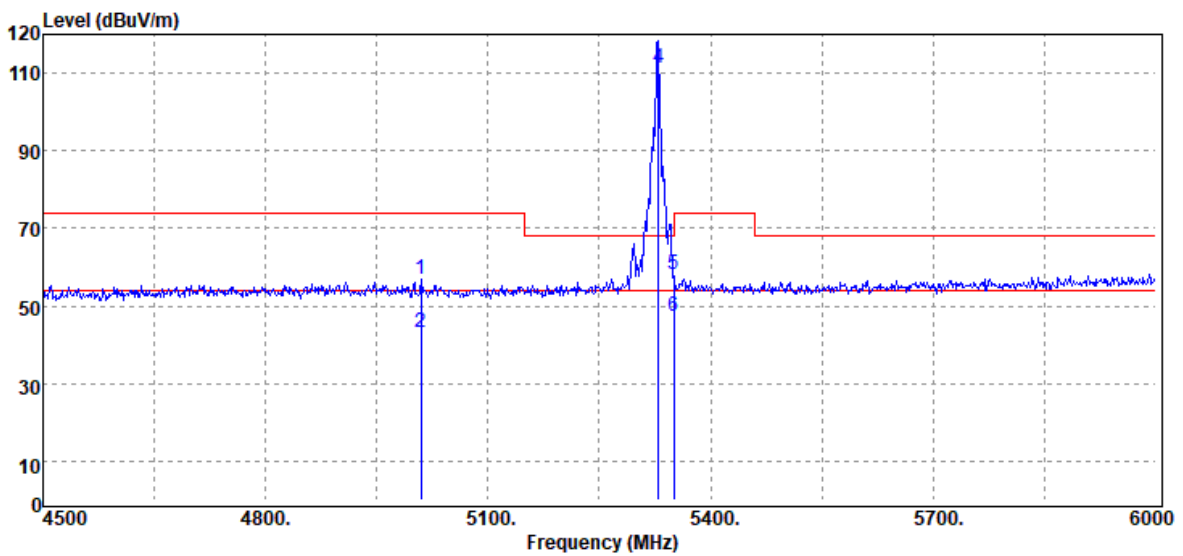

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5010.00	Peak	37.89	18.84	56.73	74.00	-17.27
5010.00	Average	24.48	18.84	43.32	54.00	-10.68
5329.50	Peak	98.34	19.82	118.16	-	-
5329.50	Average	91.53	19.82	111.35	-	-
5350.00	Peak	38.21	19.82	58.03	74.00	-15.97
5350.00	Average	27.50	19.82	47.32	54.00	-6.68

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

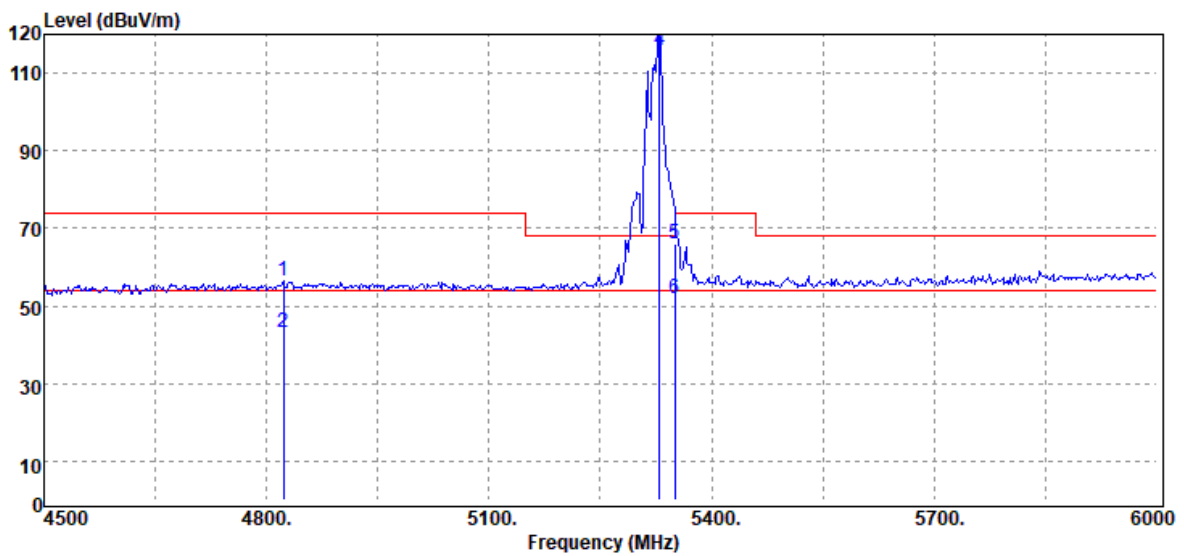

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4822.50	Peak	37.83	18.53	56.36	74.00	-17.64
4822.50	Average	24.68	18.53	43.21	54.00	-10.79
5329.50	Peak	104.78	19.82	124.60	-	-
5329.50	Average	95.98	19.82	115.80	-	-
5350.00	Peak	46.22	19.82	66.04	74.00	-7.96
5350.00	Average	32.25	19.82	52.07	54.00	-1.93

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

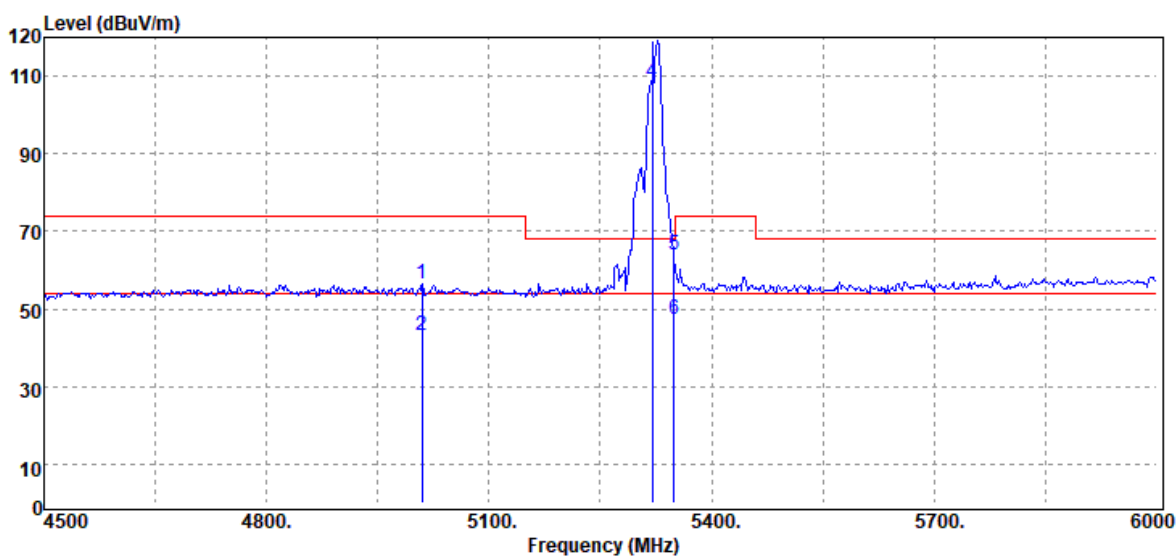

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5010.00	Peak	37.59	18.84	56.43	74.00	-17.57
5010.00	Average	24.42	18.84	43.26	54.00	-10.74
5320.00	Peak	99.51	19.81	119.32	-	-
5320.00	Average	88.71	19.81	108.52	-	-
5349.00	Peak	44.27	19.82	64.09	68.20	-4.11
5349.00	Average	27.63	19.82	47.45	54.00	-6.55

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

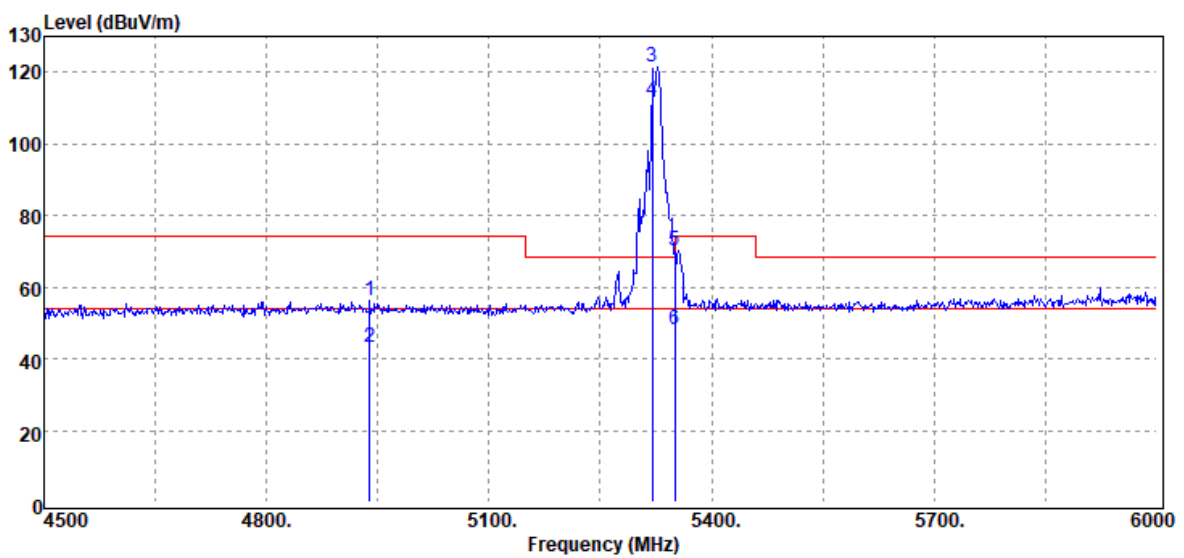

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4939.50	Peak	37.48	18.66	56.14	74.00	-17.86
4939.50	Average	24.64	18.66	43.30	54.00	-10.70
5320.00	Peak	101.43	19.81	121.24	-	-
5320.00	Average	92.21	19.81	112.02	-	-
5350.00	Peak	50.53	19.82	70.35	74.00	-3.65
5350.00	Average	28.35	19.82	48.17	54.00	-5.83

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

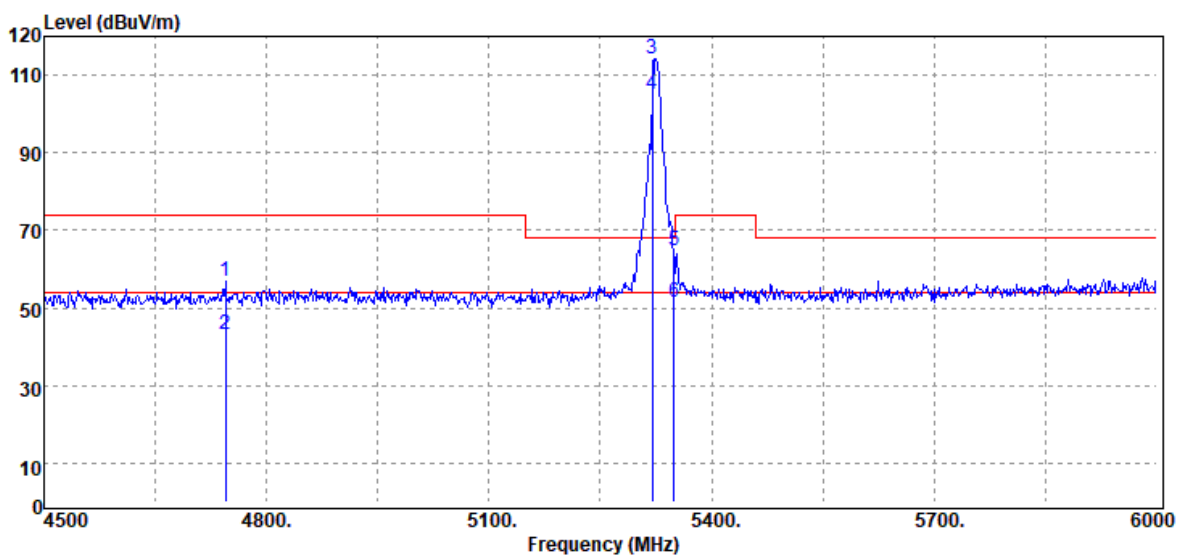

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4744.50	Peak	38.21	18.49	56.70	74.00	-17.30
4744.50	Average	24.61	18.49	43.10	54.00	-10.90
5320.00	Peak	94.56	19.81	114.37	-	-
5320.00	Average	85.28	19.81	105.09	-	-
5349.00	Peak	45.05	19.82	64.87	68.20	-3.33
5349.00	Average	31.82	19.82	51.64	54.00	-2.36

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

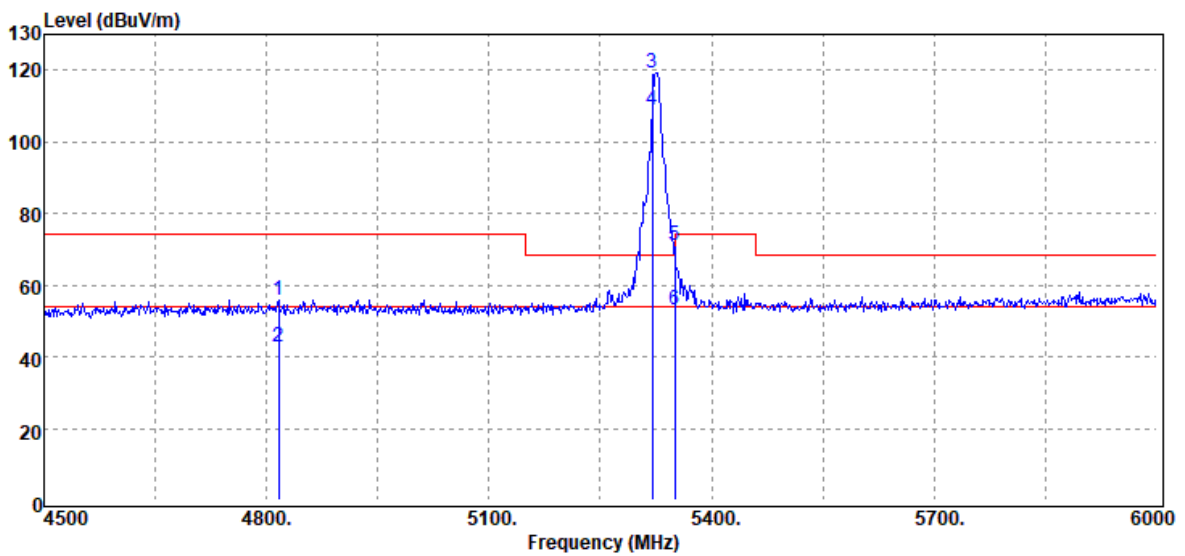

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4816.50	Peak	37.35	18.50	55.85	74.00	-18.15
4816.50	Average	24.40	18.50	42.90	54.00	-11.10
5320.00	Peak	99.48	19.81	119.29	-	-
5320.00	Average	88.86	19.81	108.67	-	-
5350.00	Peak	51.22	19.82	71.04	74.00	-2.96
5350.00	Average	33.13	19.82	52.95	54.00	-1.05

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

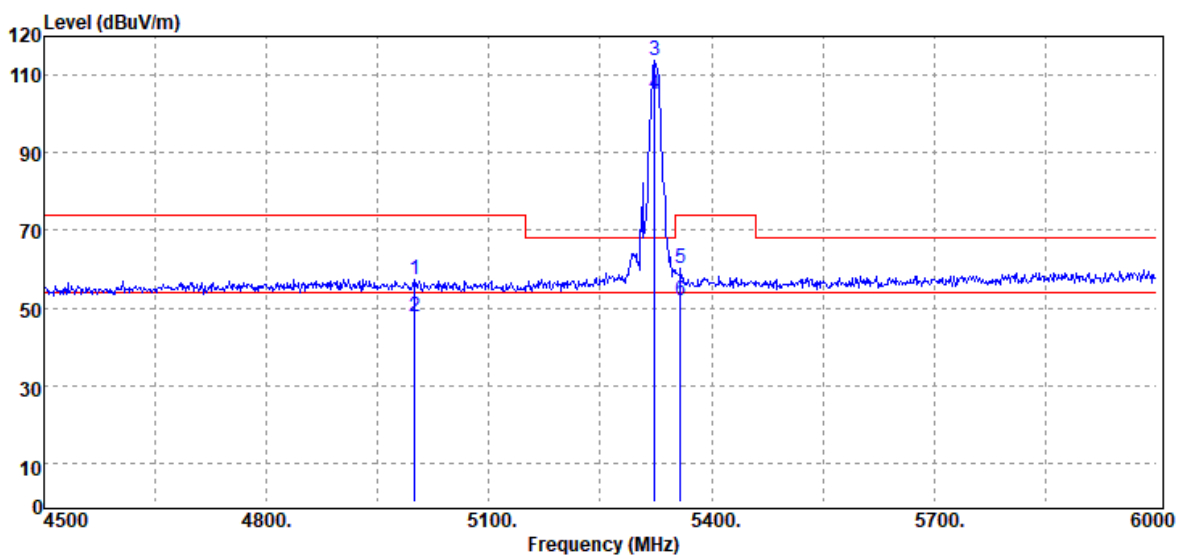

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4999.50	Peak	38.49	18.82	57.31	74.00	-16.69
4999.50	Average	28.73	18.82	47.55	54.00	-6.45
5323.50	Peak	93.90	19.81	113.71	-	-
5323.50	Average	85.19	19.81	105.00	-	-
5358.00	Peak	40.18	19.85	60.03	74.00	-13.97
5358.00	Average	32.00	19.85	51.85	54.00	-2.15

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

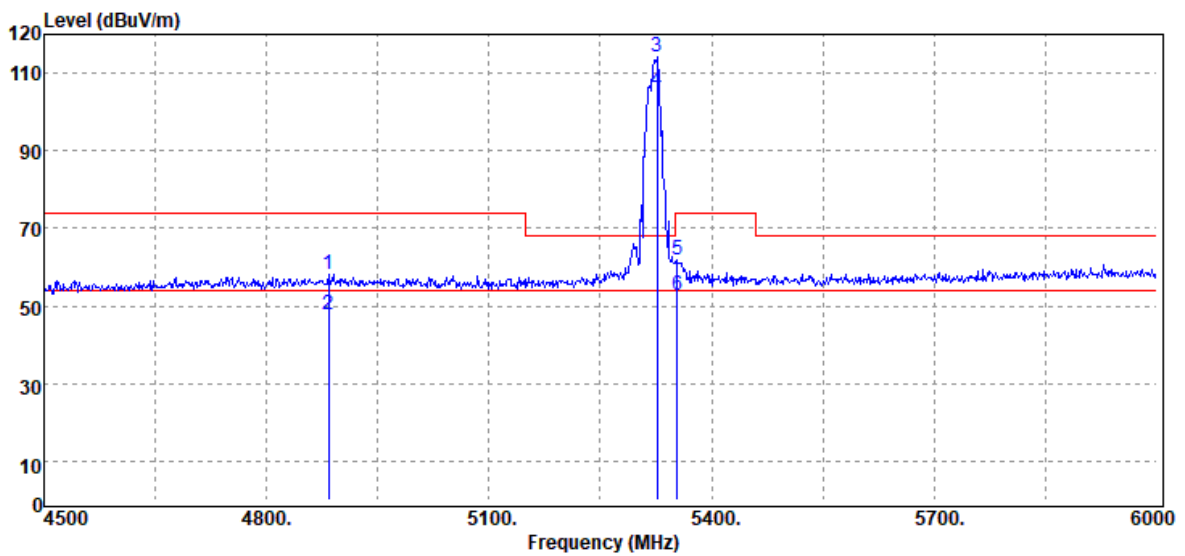

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4884.00	Peak	39.35	18.59	57.94	74.00	-16.06
4884.00	Average	29.09	18.59	47.68	54.00	-6.32
5326.50	Peak	94.40	19.82	114.22	-	-
5326.50	Average	85.63	19.82	105.45	-	-
5353.50	Peak	41.86	19.83	61.69	74.00	-12.31
5353.50	Average	33.09	19.83	52.92	54.00	-1.08

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

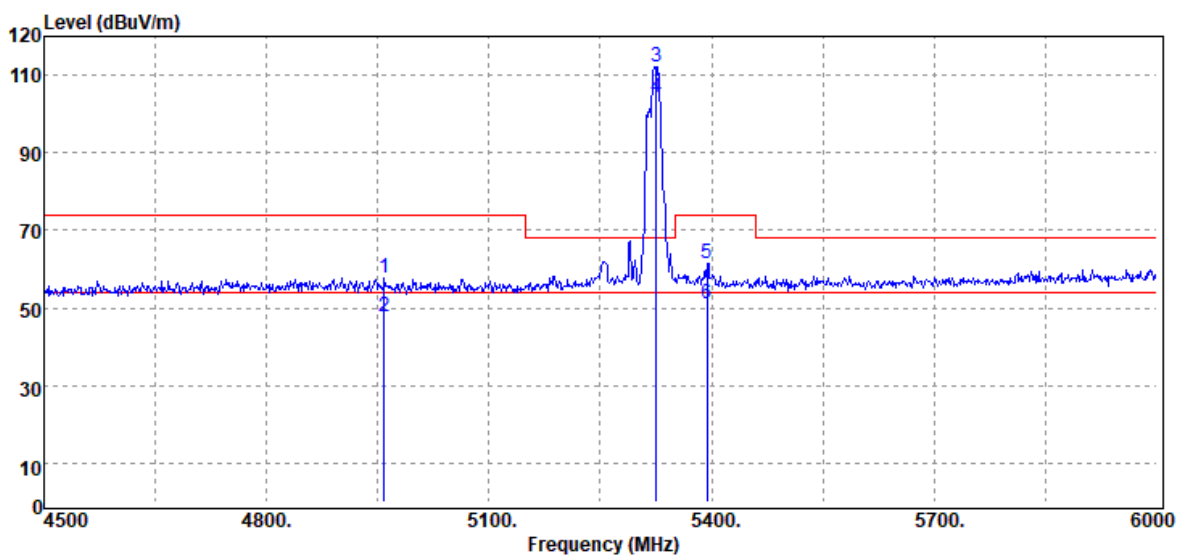

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4959.00	Peak	39.09	18.71	57.80	74.00	-16.20
4959.00	Average	29.13	18.71	47.84	54.00	-6.16
5325.00	Peak	92.34	19.81	112.15	-	-
5325.00	Average	84.61	19.81	104.42	-	-
5394.00	Peak	41.43	20.04	61.47	74.00	-12.53
5394.00	Average	30.91	20.04	50.95	54.00	-3.05

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

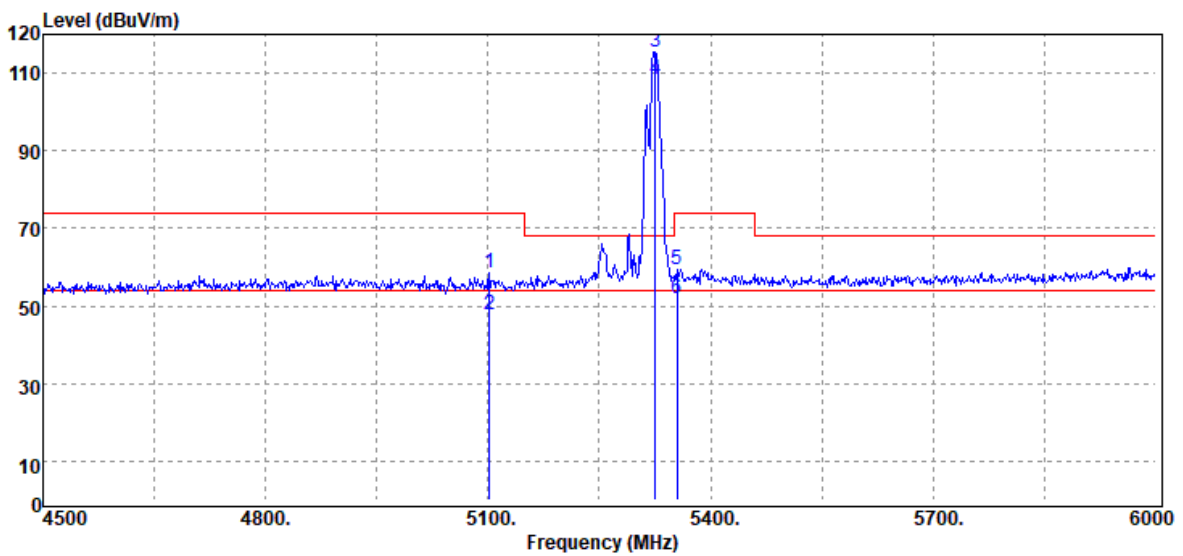


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5101.50	Peak	39.64	18.84	58.48	74.00	-15.52
5101.50	Average	29.01	18.84	47.85	54.00	-6.15
5325.00	Peak	95.81	19.81	115.62	-	-
5325.00	Average	88.45	19.81	108.26	-	-
5355.00	Peak	39.68	19.84	59.52	74.00	-14.48
5355.00	Average	32.17	19.84	52.01	54.00	-1.99

Report No.: T210319W02-RP2

Test Data for UNII-2c


Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.3(°C)/ 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

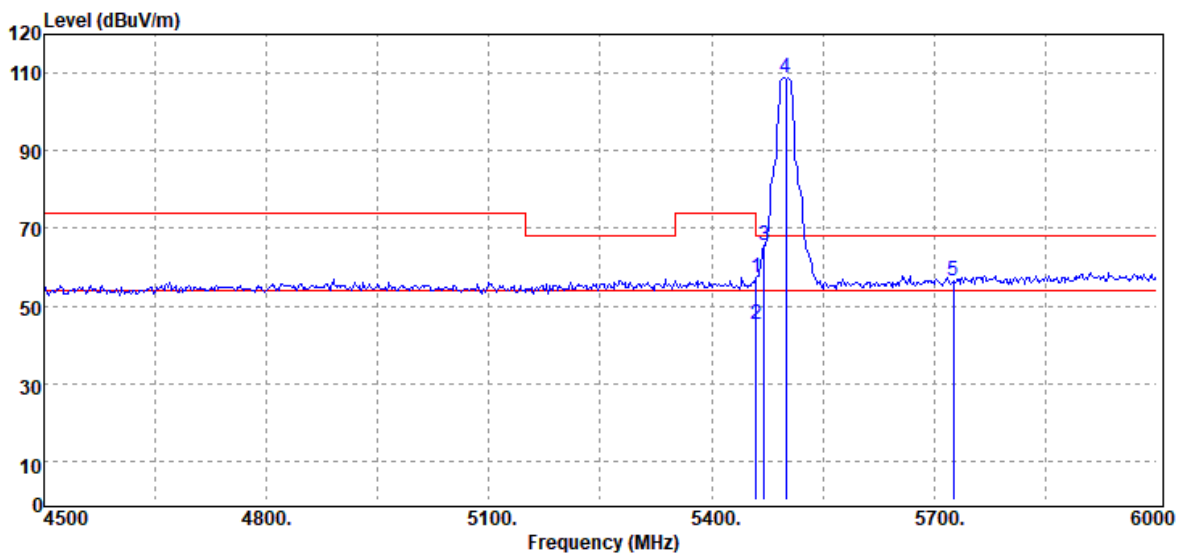

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	37.35	20.06	57.41	74.00	-16.59
5460.00	Average	25.37	20.06	45.43	54.00	-8.57
5470.50	Peak	45.43	20.05	65.48	68.20	-2.72
5500.00	Peak	88.83	20.02	108.85	-	-
5725.50	Peak	35.99	20.32	56.31	68.20	-11.89

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

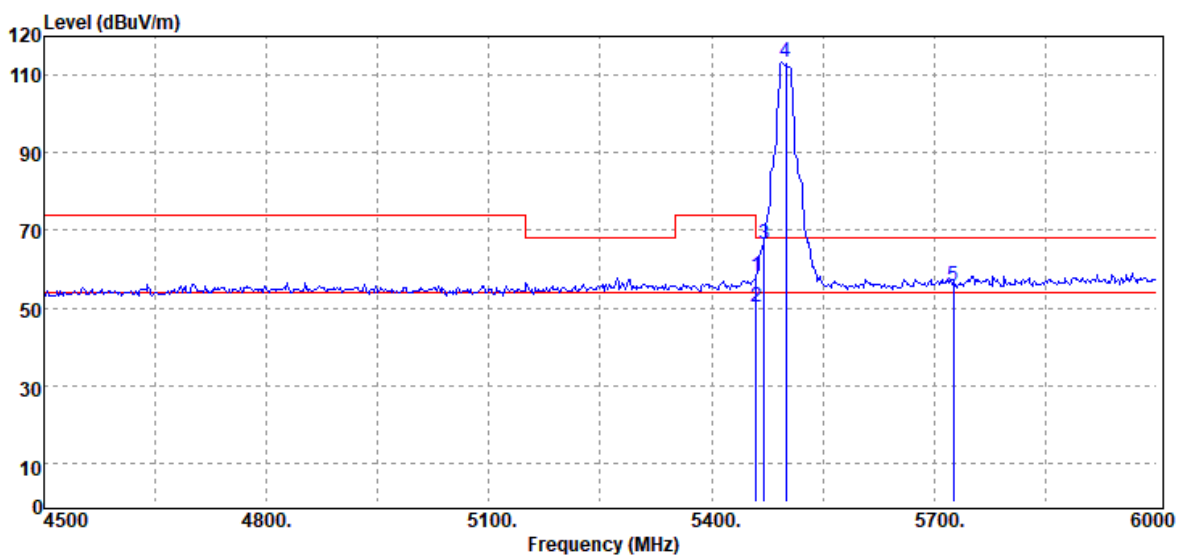

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	38.10	20.06	58.16	74.00	-15.84
5460.00	Average	30.19	20.06	50.25	54.00	-3.75
5470.50	Peak	46.23	20.05	66.28	68.20	-1.92
5500.00	Peak	93.20	20.02	113.22	-	-
5725.50	Peak	35.43	20.32	55.75	68.20	-12.45

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

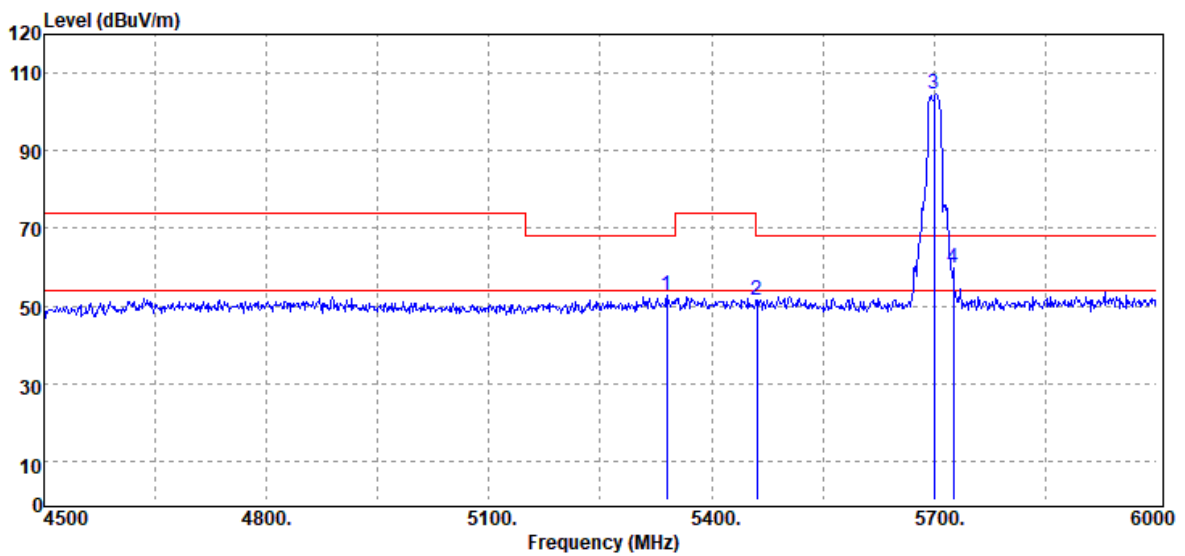

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5340.00	Peak	33.09	19.81	52.90	68.20	-15.30
5461.50	Peak	31.46	20.06	51.52	68.20	-16.68
5700.00	Peak	84.39	20.16	104.55	-	-
5725.50	Peak	39.33	20.32	59.65	68.20	-8.55

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

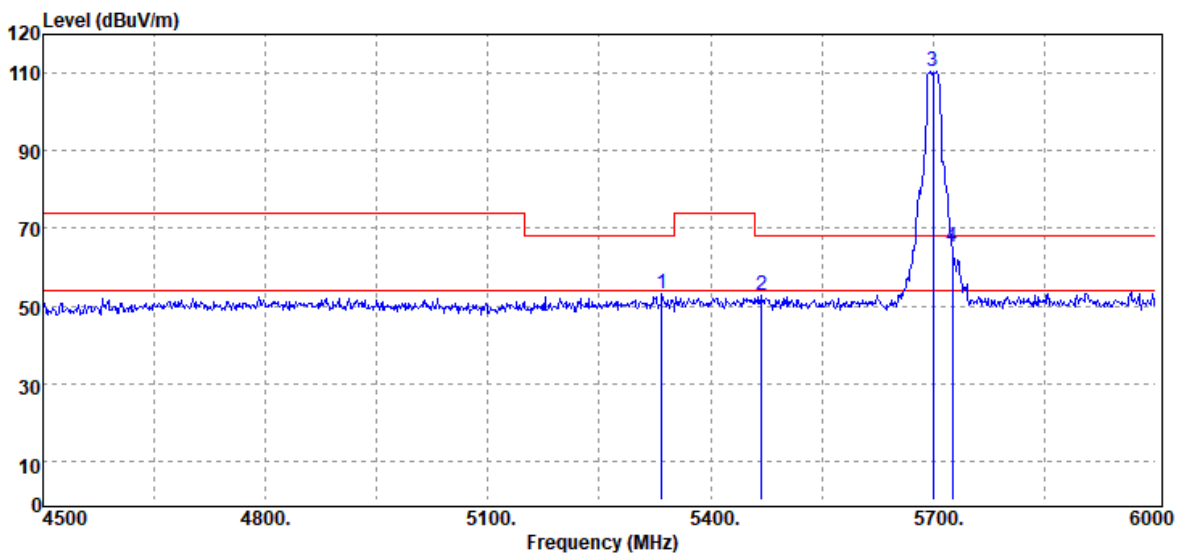

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5334.00	Peak	33.21	19.81	53.02	68.20	-15.18
5469.00	Peak	32.61	20.05	52.66	68.20	-15.54
5700.00	Peak	90.30	20.16	110.46	-	-
5725.50	Peak	44.81	20.32	65.13	68.20	-3.07

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

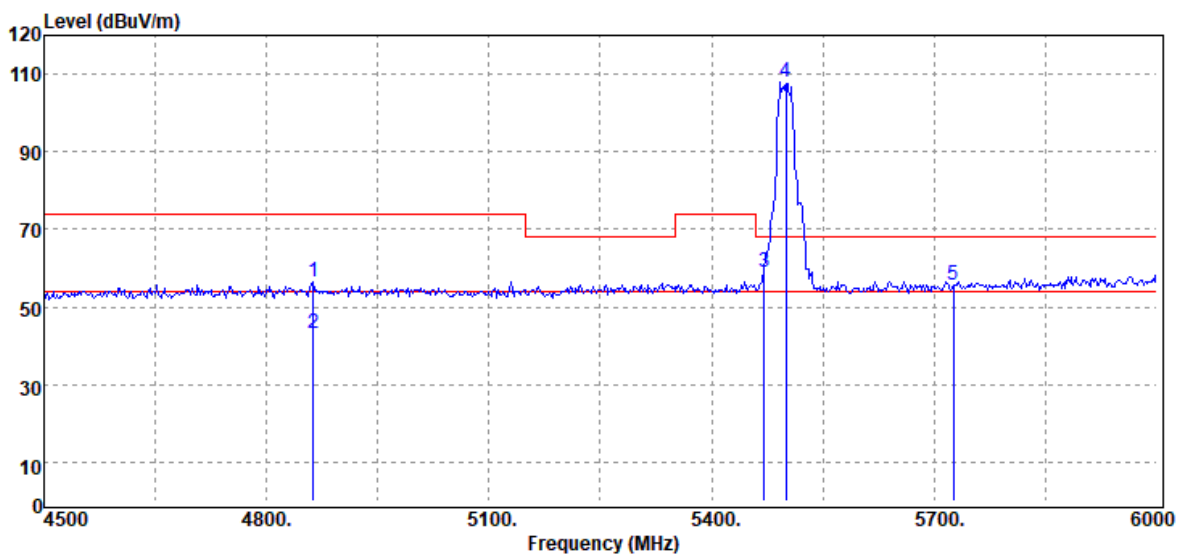

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4863.00	Peak	37.92	18.60	56.52	74.00	-17.48
4863.00	Average	24.69	18.60	43.29	54.00	-10.71
5470.50	Peak	38.79	20.05	58.84	68.20	-9.36
5500.00	Peak	88.04	20.02	108.06	-	-
5725.50	Peak	35.25	20.32	55.57	68.20	-12.63

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

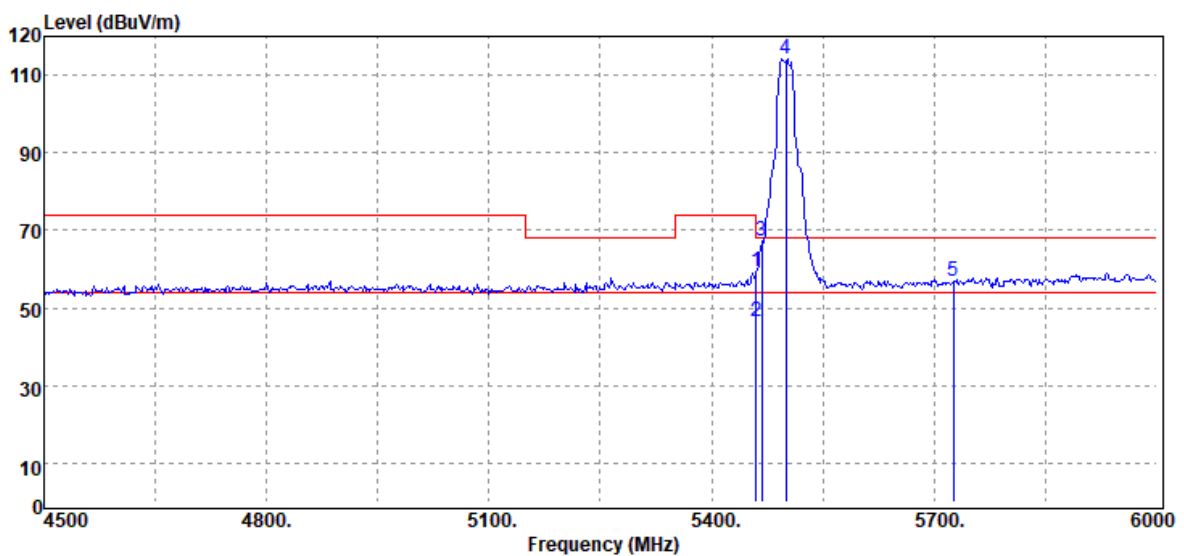

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	39.41	20.06	59.47	74.00	-14.53
5460.00	Average	26.59	20.06	46.65	54.00	-7.35
5467.50	Peak	47.05	20.06	67.11	68.20	-1.09
5500.00	Peak	94.05	20.02	114.07	-	-
5725.50	Peak	36.54	20.32	56.86	68.20	-11.34

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

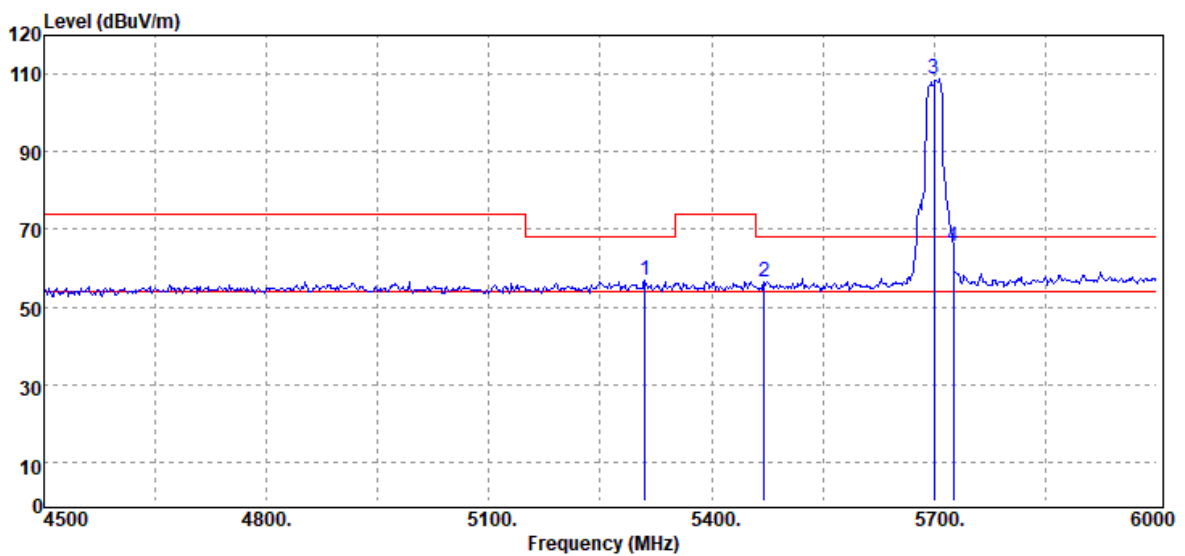

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5310.00	Peak	37.20	19.82	57.02	68.20	-11.18
5470.50	Peak	36.23	20.05	56.28	68.20	-11.92
5700.00	Peak	88.76	20.16	108.92	-	-
5725.50	Peak	45.25	20.32	65.57	68.20	-2.63

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

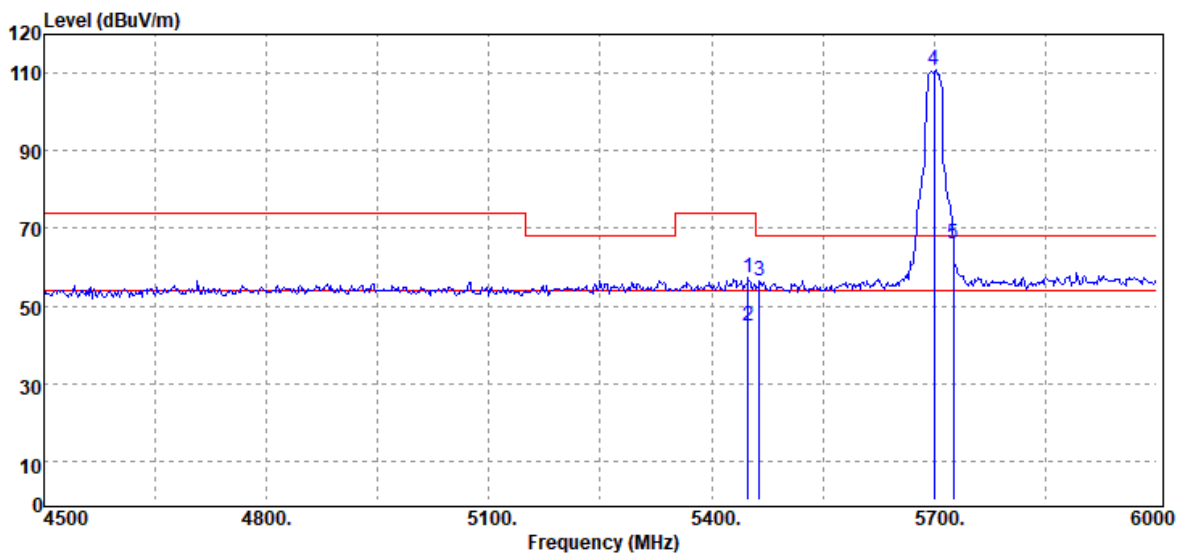

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5449.50	Peak	37.05	20.07	57.12	74.00	-16.88
5449.50	Average	24.63	20.07	44.70	54.00	-9.30
5464.50	Peak	36.34	20.05	56.39	68.20	-11.81
5700.00	Peak	90.87	20.16	111.03	-	-
5725.50	Peak	45.53	20.32	65.85	68.20	-2.35

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

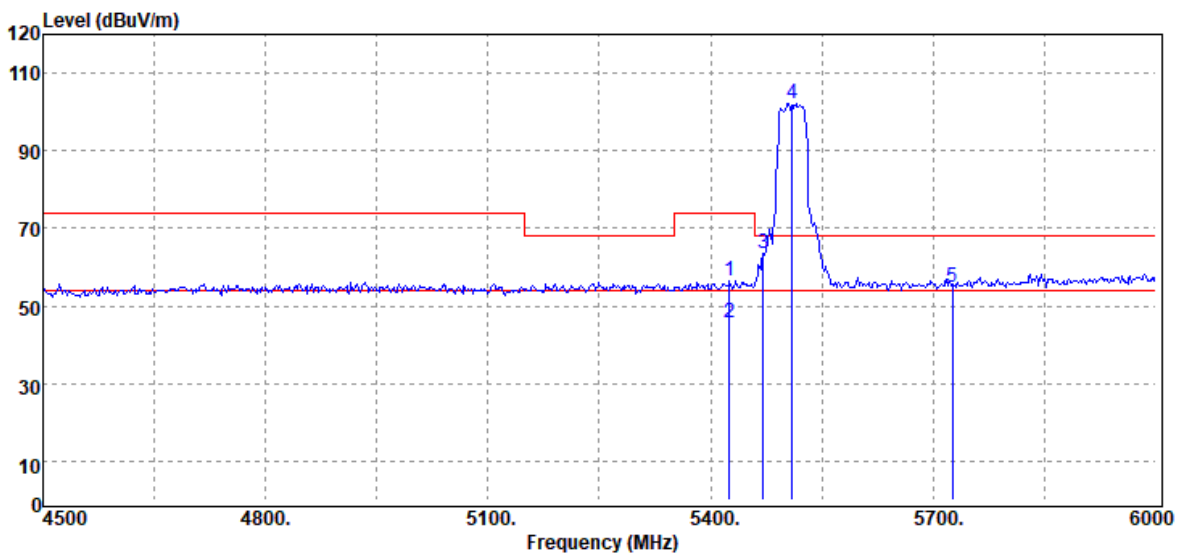

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5425.50	Peak	36.37	20.07	56.44	74.00	-17.56
5425.50	Average	25.70	20.07	45.77	54.00	-8.23
5470.50	Peak	43.35	20.05	63.40	68.20	-4.80
5510.00	Peak	82.27	20.02	102.29	-	-
5725.50	Peak	34.62	20.32	54.94	68.20	-13.26

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

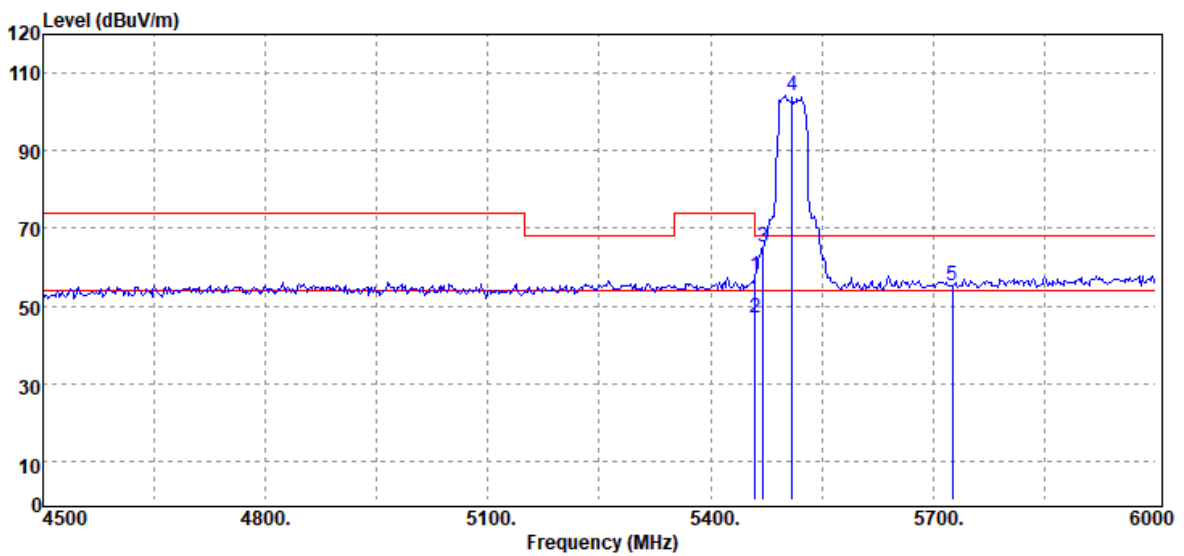

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	37.77	20.06	57.83	74.00	-16.17
5460.00	Average	27.01	20.06	47.07	54.00	-6.93
5470.50	Peak	45.27	20.05	65.32	68.20	-2.88
5510.00	Peak	84.02	20.02	104.04	-	-
5725.50	Peak	34.97	20.32	55.29	68.20	-12.91

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

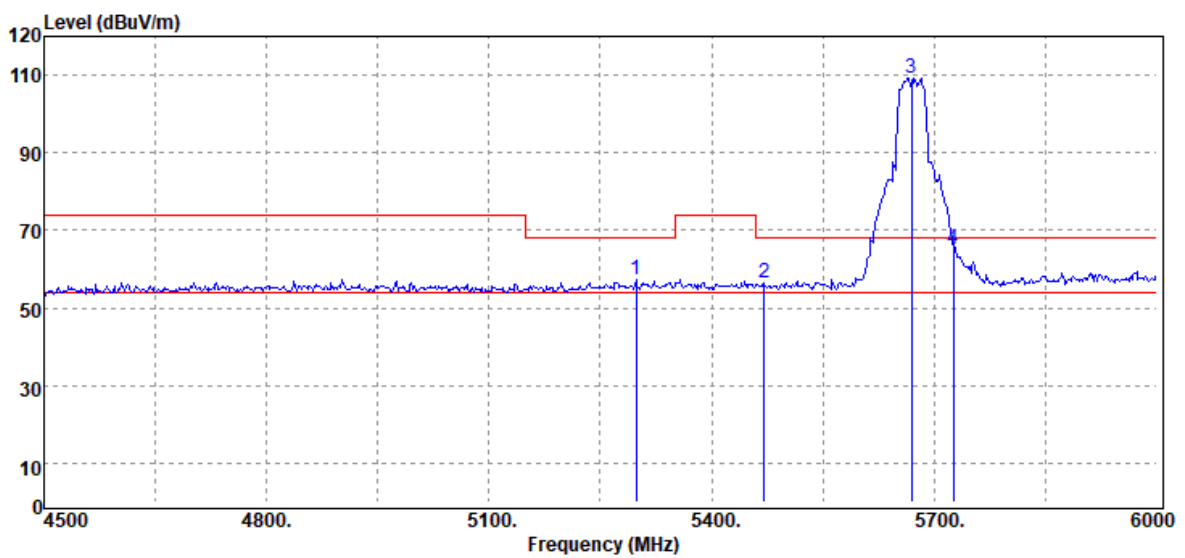

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5298.00	Peak	37.68	19.81	57.49	68.20	-10.71
5470.50	Peak	36.60	20.05	56.65	68.20	-11.55
5670.00	Peak	89.25	20.15	109.40	-	-
5725.50	Peak	45.05	20.32	65.37	68.20	-2.83

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

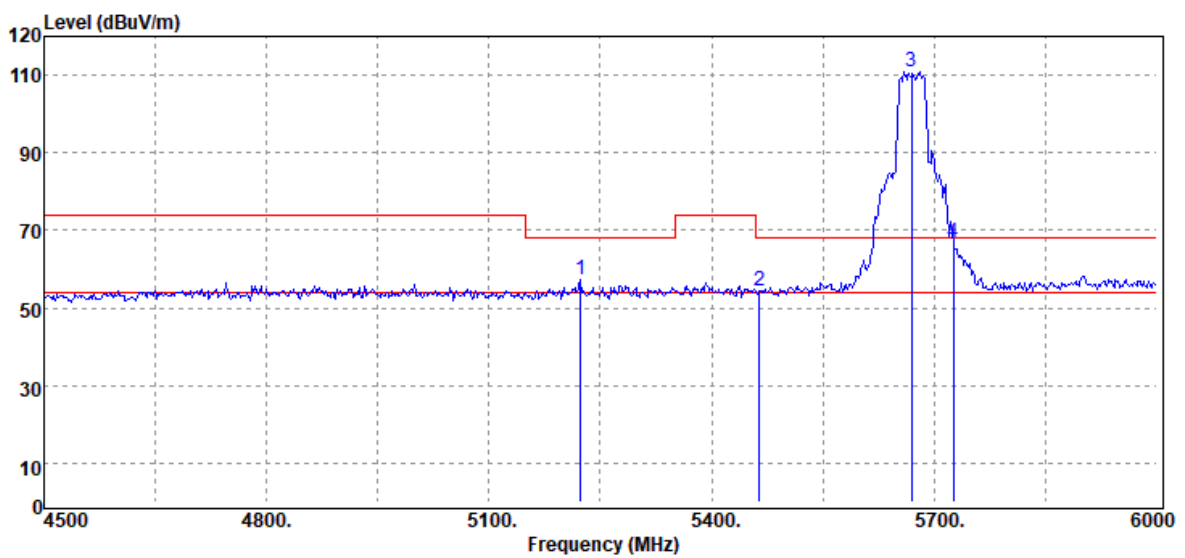

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5223.00	Peak	37.76	19.47	57.23	68.20	-10.97
5464.50	Peak	34.37	20.05	54.42	68.20	-13.78
5670.00	Peak	90.76	20.15	110.91	-	-
5725.50	Peak	46.71	20.32	67.03	68.20	-1.17

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.5(°C) / 55%RH
Test Item	Band Edge	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

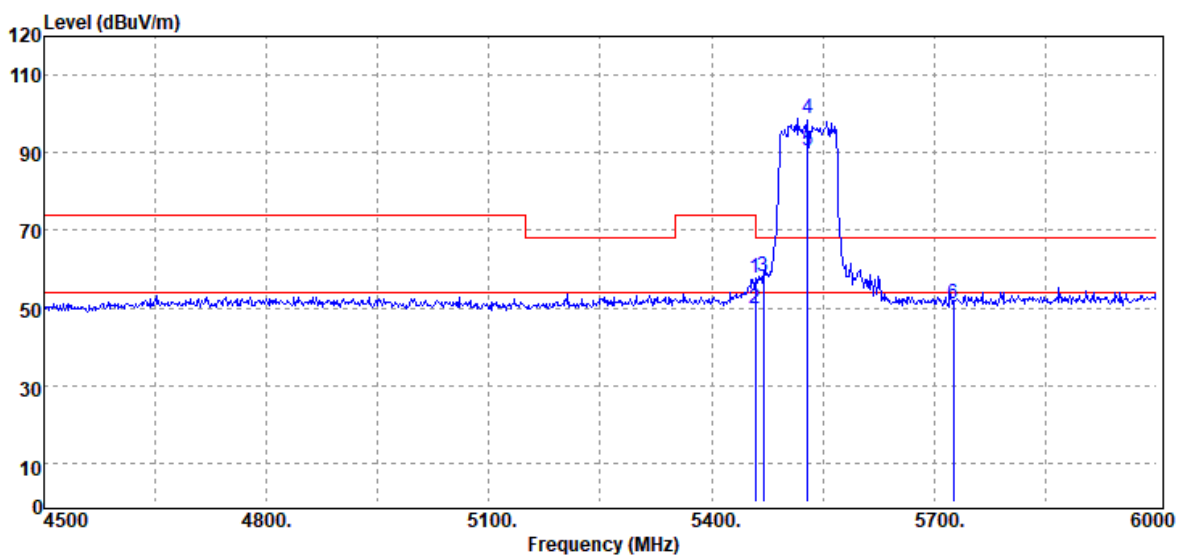

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.50	Peak	37.75	20.06	57.81	74.00	-16.19
5458.50	Average	29.93	20.06	49.99	54.00	-4.01
5470.00	Peak	38.29	20.05	58.34	68.20	-9.86
5530.00	Peak	78.71	20.03	98.74	-	-
5530.00	Average	70.67	20.03	90.70	-	-
5725.50	Peak	30.56	20.32	50.88	68.20	-17.32

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.5(°C) / 55%RH
Test Item	Band Edge	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

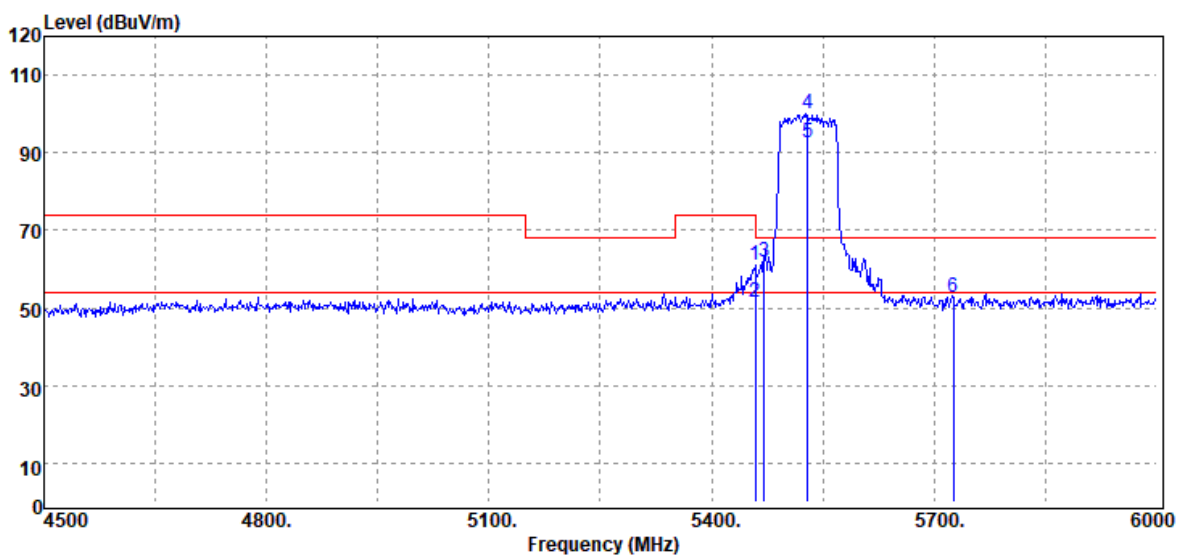

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.50	Peak	41.13	20.06	61.19	74.00	-12.81
5458.50	Average	31.57	20.06	51.63	54.00	-2.37
5470.50	Peak	41.82	20.05	61.87	68.20	-6.33
5530.00	Peak	80.17	20.03	100.20	-	-
5530.00	Average	72.76	20.03	92.79	-	-
5725.50	Peak	32.25	20.32	52.57	68.20	-15.63

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

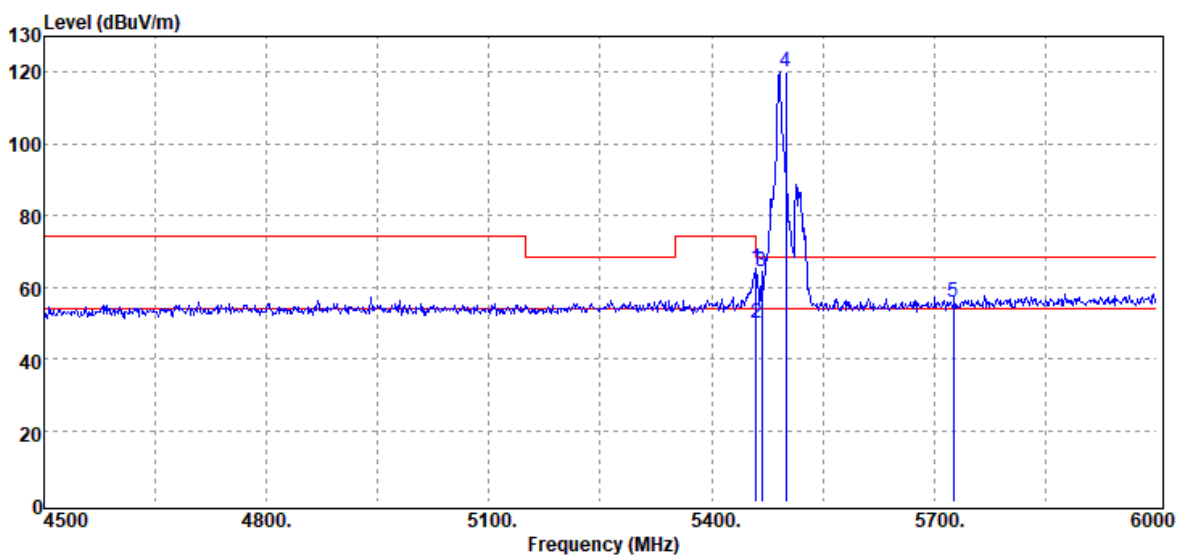

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5460.00	Peak	45.24	20.06	65.30	74.00	-8.70
5460.00	Average	29.77	20.06	49.83	54.00	-4.17
5467.50	Peak	44.49	20.06	64.55	68.20	-3.65
5500.00	Peak	100.11	20.02	120.13	-	-
5725.50	Peak	35.47	20.32	55.79	68.20	-12.41

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

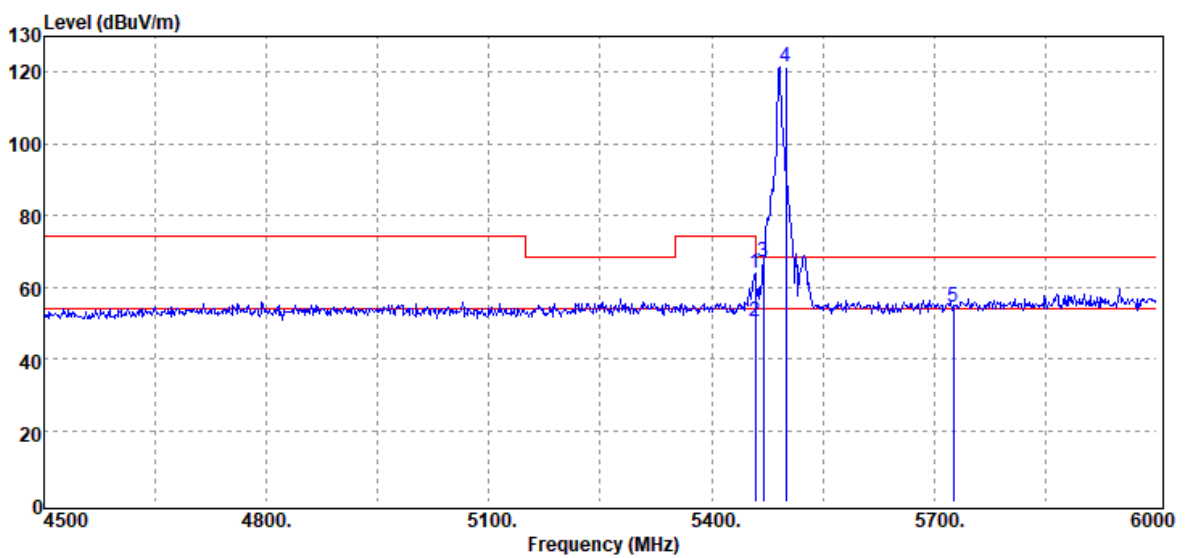

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.50	Peak	43.68	20.06	63.74	74.00	-10.26
5458.50	Average	30.44	20.06	50.50	54.00	-3.50
5470.00	Peak	46.81	20.05	66.86	68.20	-1.34
5500.00	Peak	101.33	20.02	121.35	-	-
5725.50	Peak	33.99	20.32	54.31	68.20	-13.89

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

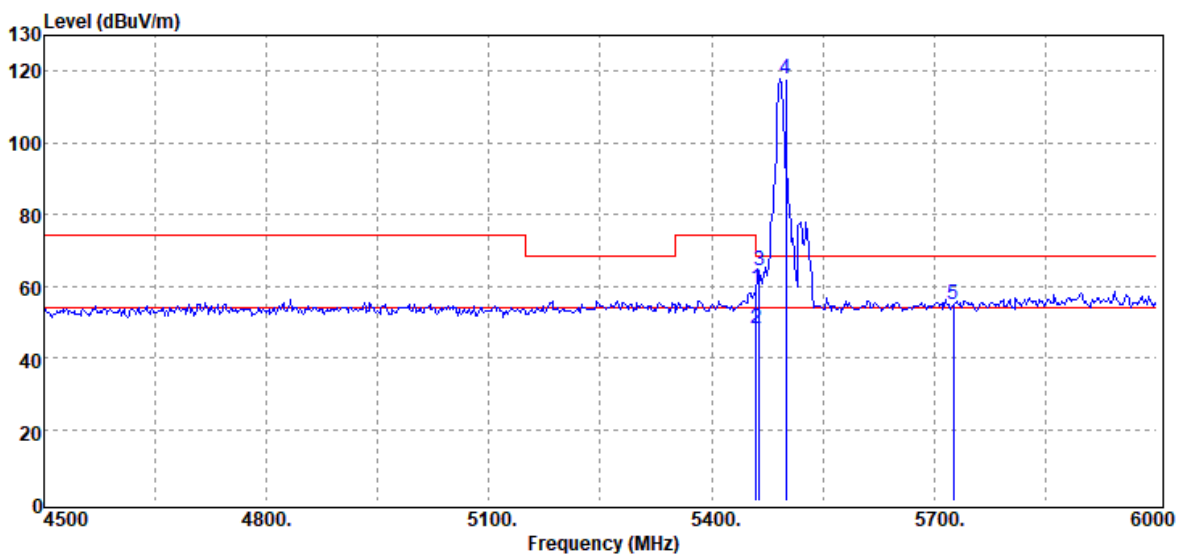

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	39.12	20.06	59.18	74.00	-14.82
5460.00	Average	28.14	20.06	48.20	54.00	-5.80
5464.50	Peak	44.25	20.05	64.30	68.20	-3.90
5500.00	Peak	97.86	20.02	117.88	-	-
5725.50	Peak	34.37	20.32	54.69	68.20	-13.51

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

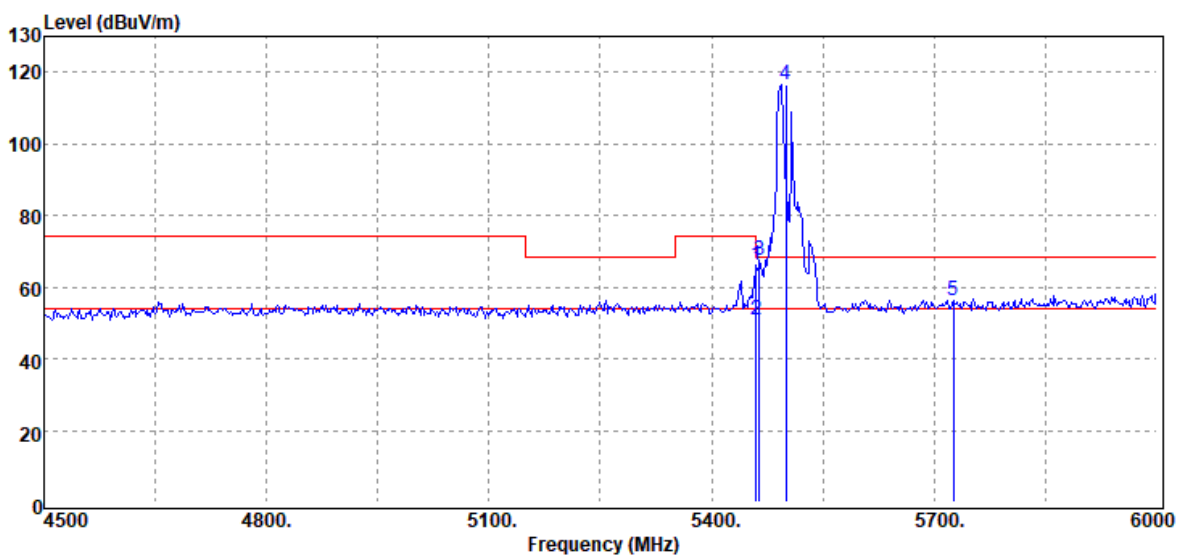

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	46.14	20.06	66.20	74.00	-7.80
5460.00	Average	30.73	20.06	50.79	54.00	-3.21
5464.50	Peak	47.39	20.05	67.44	68.20	-0.76
5500.00	Peak	96.69	20.02	116.71	-	-
5725.50	Peak	36.08	20.32	56.40	68.20	-11.80

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

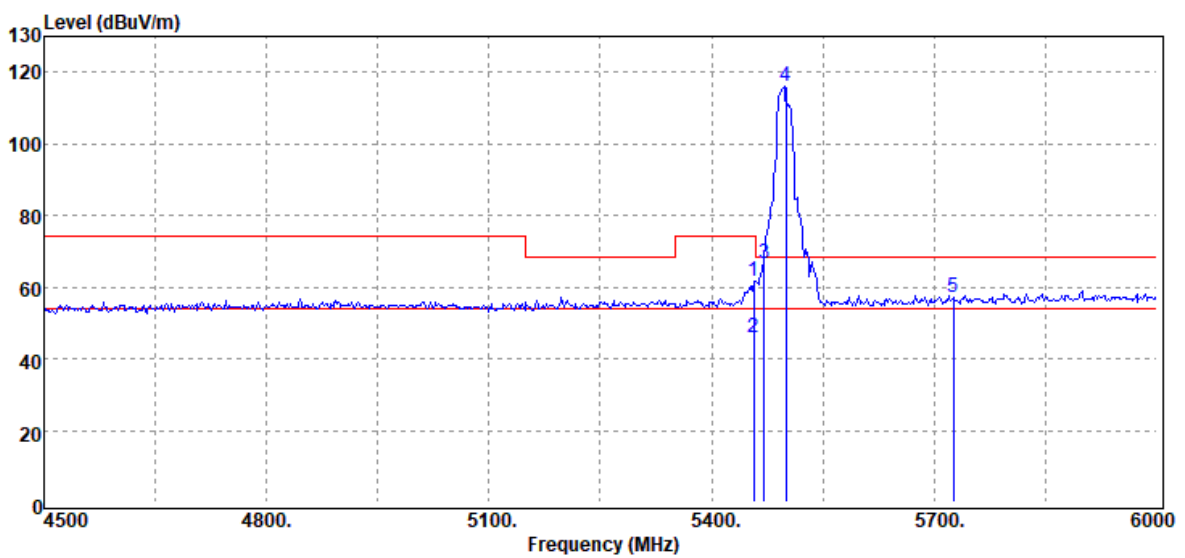

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.00	Peak	41.39	20.07	61.46	74.00	-12.54
5457.00	Average	25.59	20.07	45.66	54.00	-8.34
5470.50	Peak	46.67	20.05	66.72	68.20	-1.48
5500.00	Peak	96.12	20.02	116.14	-	-
5725.50	Peak	36.69	20.32	57.01	68.20	-11.19

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

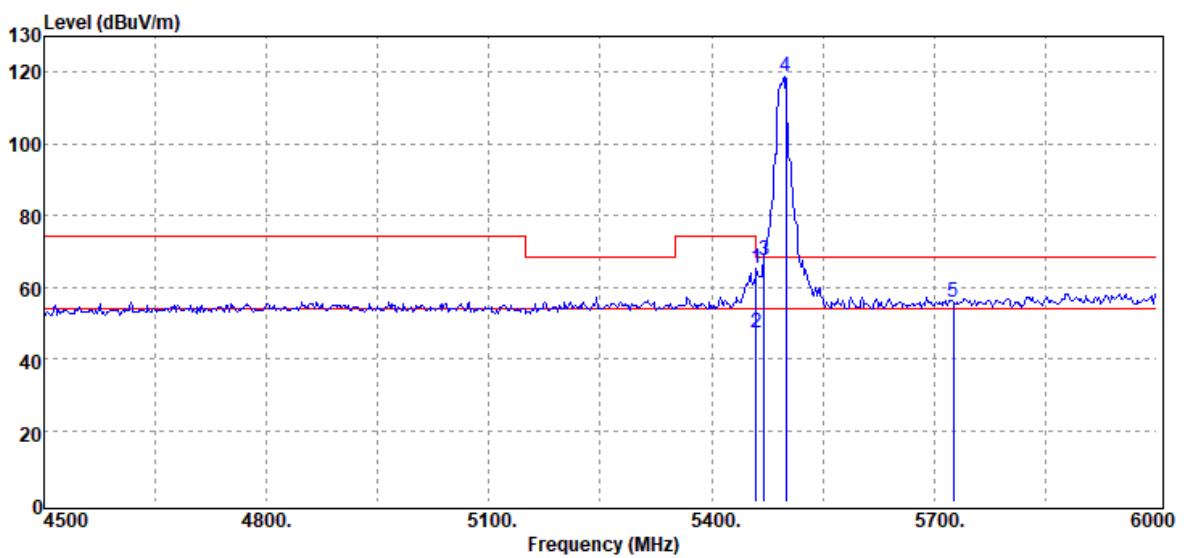

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	44.96	20.06	65.02	74.00	-8.98
5460.00	Average	26.97	20.06	47.03	54.00	-6.97
5470.50	Peak	47.51	20.05	67.56	68.20	-0.64
5500.00	Peak	98.63	20.02	118.65	-	-
5725.50	Peak	35.58	20.32	55.90	68.20	-12.30

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

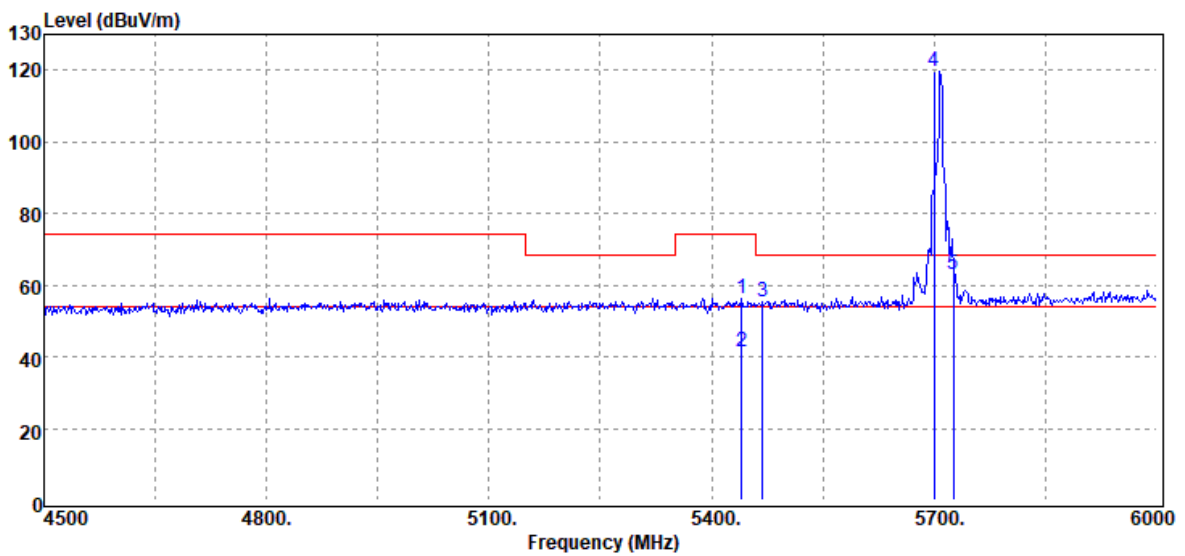

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5440.50	Peak	36.15	20.07	56.22	74.00	-17.78
5440.50	Average	21.22	20.07	41.29	54.00	-12.71
5469.00	Peak	35.11	20.05	55.16	68.20	-13.04
5700.00	Peak	99.57	20.16	119.73	-	-
5725.50	Peak	42.82	20.32	63.14	68.20	-5.06

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

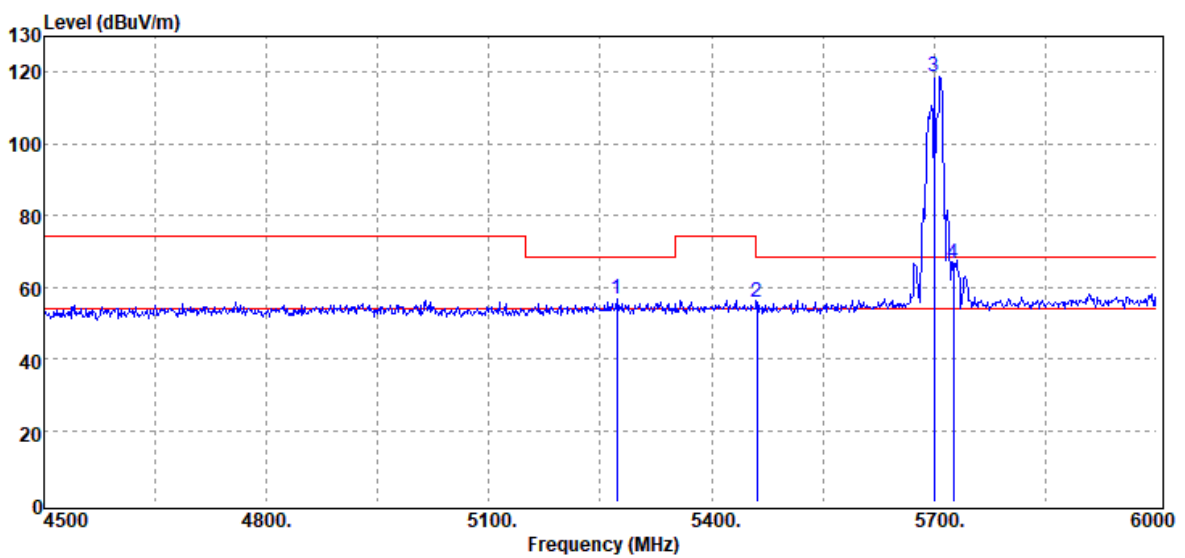

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5272.50	Peak	37.10	19.73	56.83	68.20	-11.37
5461.50	Peak	35.92	20.06	55.98	68.20	-12.22
5700.00	Peak	98.60	20.16	118.76	-	-
5725.50	Peak	46.10	20.32	66.42	68.20	-1.78

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

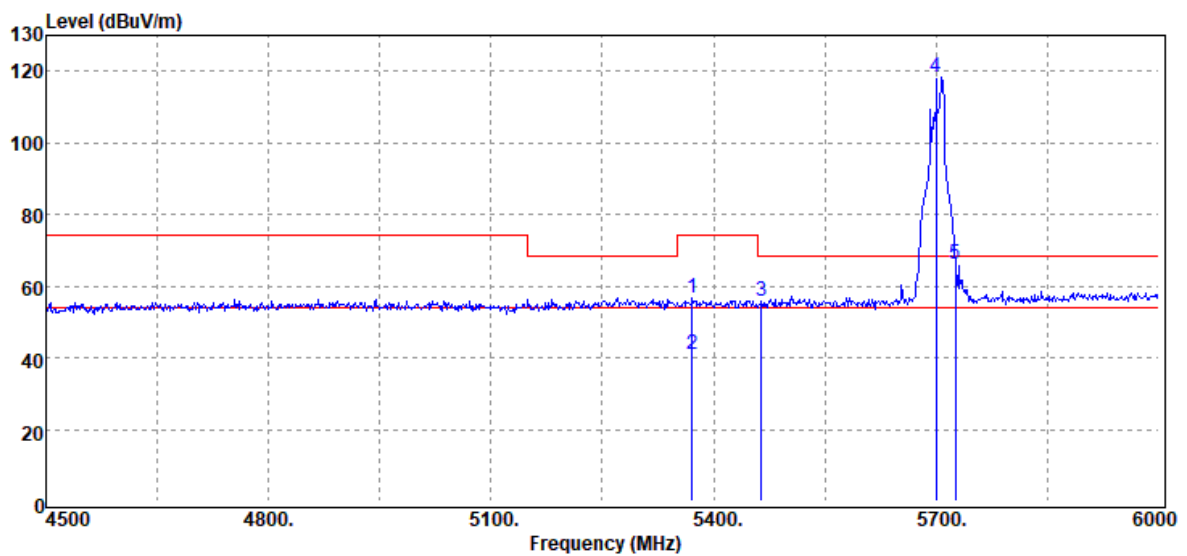

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5371.50	Peak	36.63	19.92	56.55	74.00	-17.45
5371.50	Average	21.17	19.92	41.09	54.00	-12.91
5464.50	Peak	35.93	20.05	55.98	68.20	-12.22
5700.00	Peak	98.33	20.16	118.49	-	-
5725.50	Peak	45.63	20.32	65.95	68.20	-2.25

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

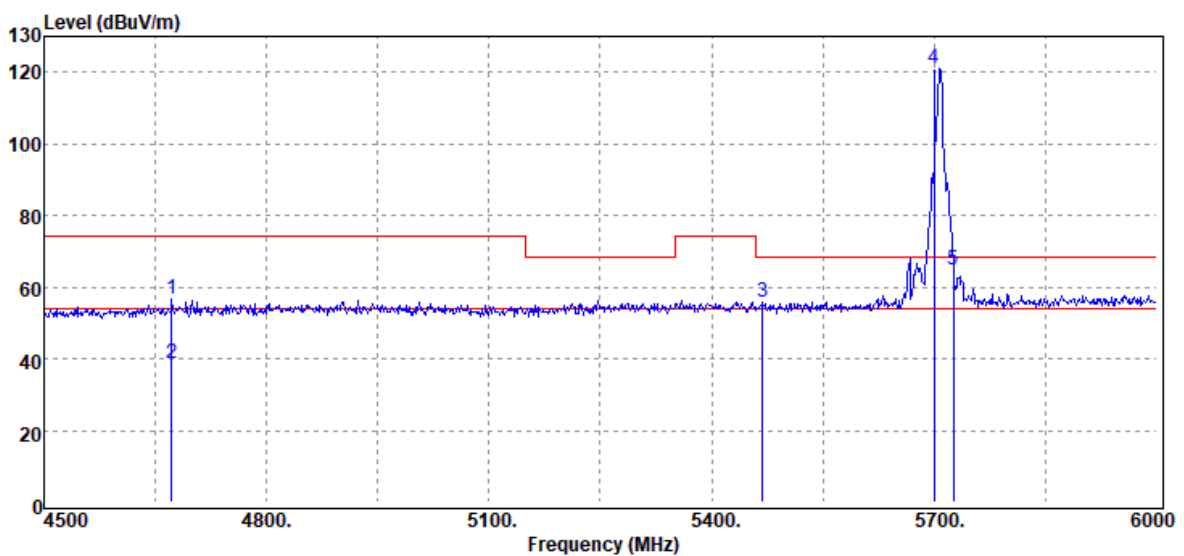

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
4672.50	Peak	38.03	18.42	56.45	74.00	-17.55
4672.50	Average	20.24	18.42	38.66	54.00	-15.34
5469.00	Peak	35.95	20.05	56.00	68.20	-12.20
5700.00	Peak	100.94	20.16	121.10	-	-
5725.50	Peak	44.58	20.32	64.90	68.20	-3.30

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

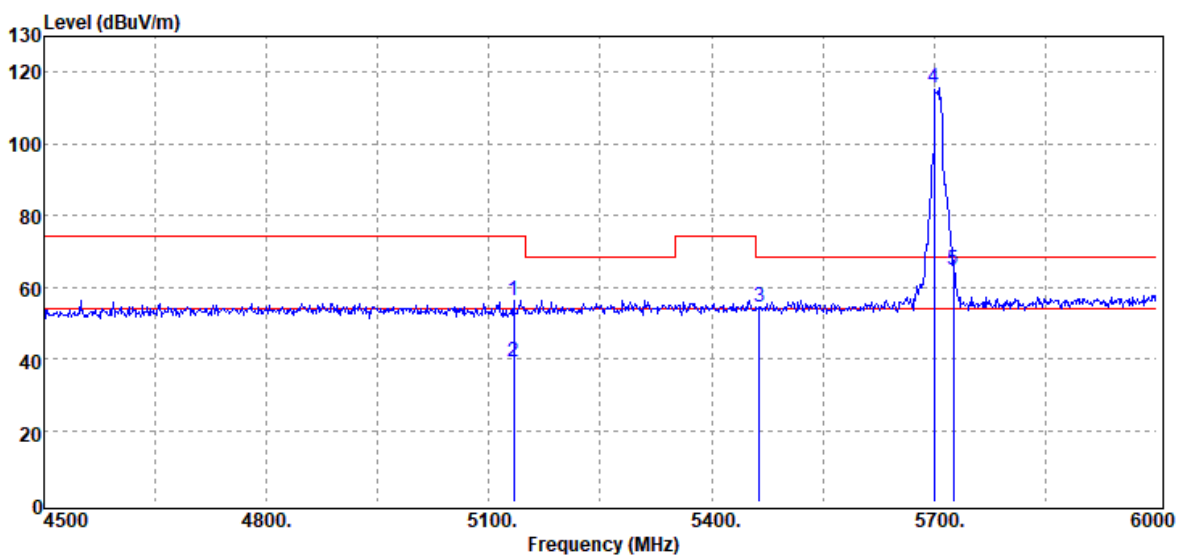

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5133.00	Peak	37.39	18.95	56.34	74.00	-17.66
5133.00	Average	20.11	18.95	39.06	54.00	-14.94
5464.50	Peak	34.39	20.05	54.44	68.20	-13.76
5700.00	Peak	95.62	20.16	115.78	-	-
5725.50	Peak	44.49	20.32	64.81	68.20	-3.39

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

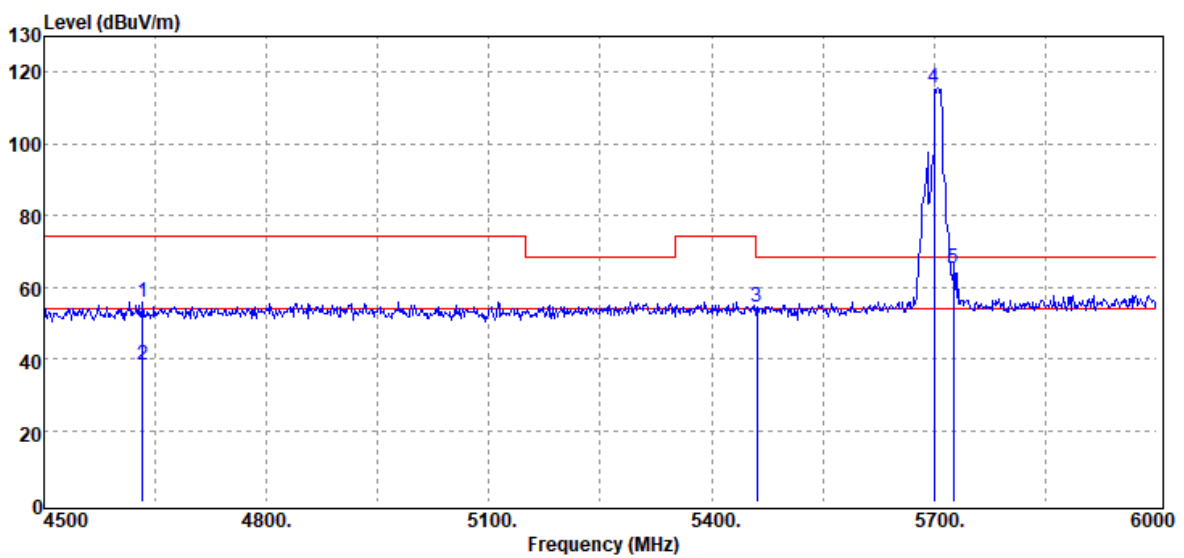

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4633.50	Peak	37.46	18.35	55.81	74.00	-18.19
4633.50	Average	19.98	18.35	38.33	54.00	-15.67
5461.50	Peak	34.27	20.06	54.33	68.20	-13.87
5700.00	Peak	95.32	20.16	115.48	-	-
5725.50	Peak	44.93	20.32	65.25	68.20	-2.95

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

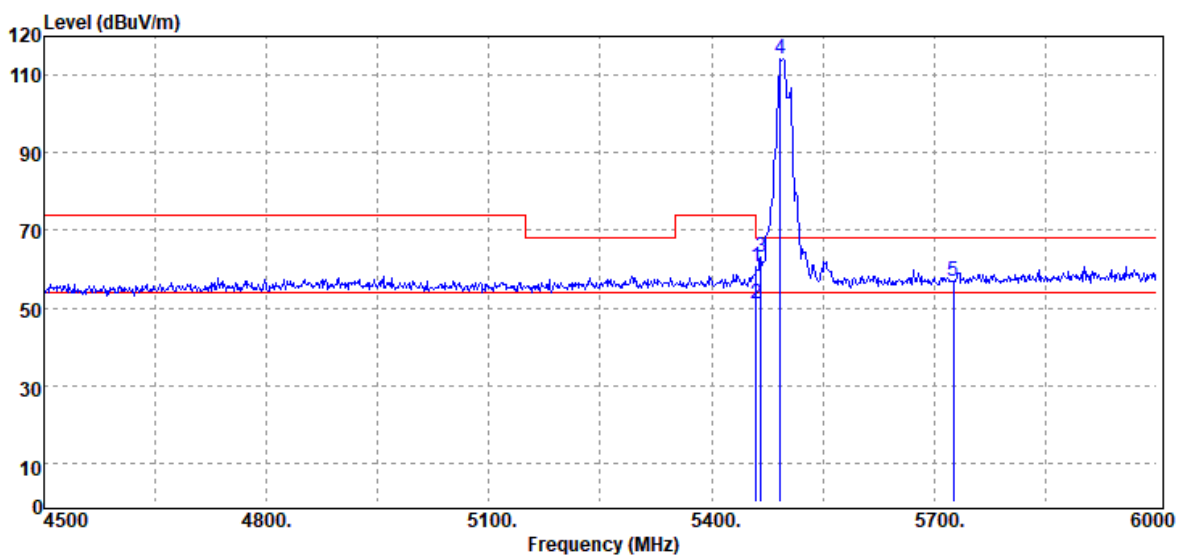

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	40.45	20.06	60.51	74.00	-13.49
5460.00	Average	31.03	20.06	51.09	54.00	-2.91
5466.00	Peak	42.87	20.06	62.93	68.20	-5.27
5493.00	Peak	94.11	20.02	114.13	-	-
5725.50	Peak	36.37	20.32	56.69	68.20	-11.51

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

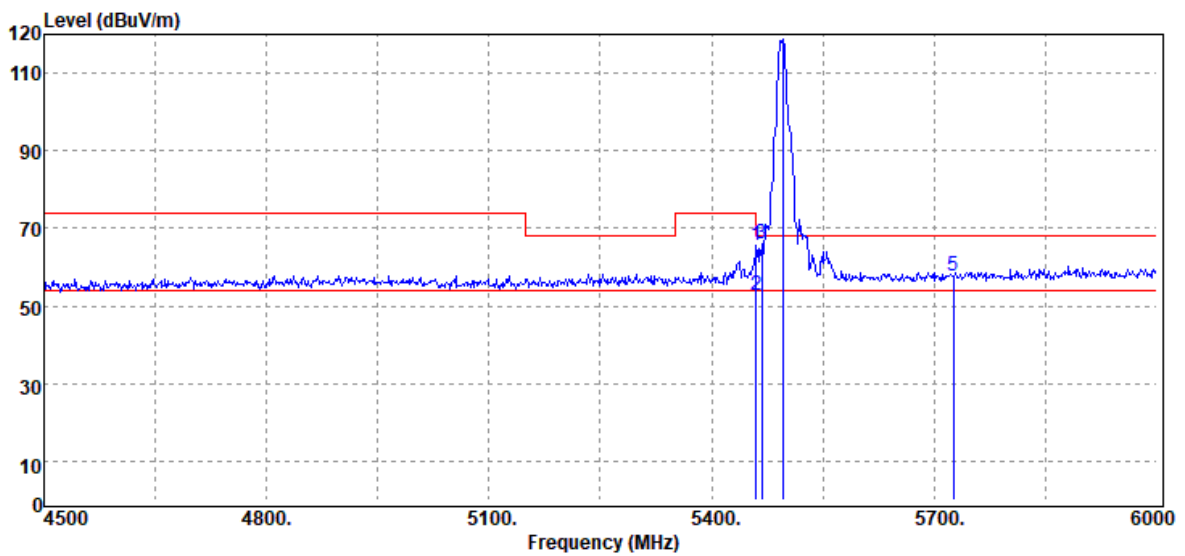

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	45.42	20.06	65.48	74.00	-8.52
5460.00	Average	32.55	20.06	52.61	54.00	-1.39
5467.50	Peak	46.06	20.06	66.12	68.20	-2.08
5496.00	Peak	98.88	20.03	118.91	-	-
5725.50	Peak	37.46	20.32	57.78	68.20	-10.42

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

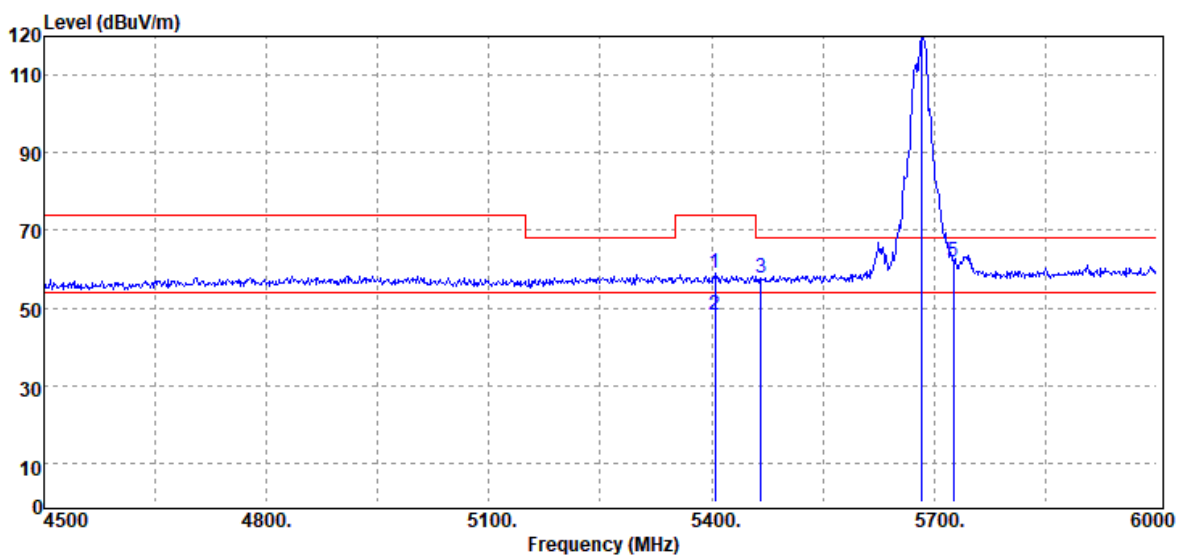

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5404.50	Peak	38.72	20.06	58.78	74.00	-15.22
5404.50	Average	28.23	20.06	48.29	54.00	-5.71
5466.00	Peak	37.64	20.06	57.70	68.20	-10.50
5682.00	Peak	99.53	20.16	119.69	-	-
5725.50	Peak	41.45	20.32	61.77	68.20	-6.43

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

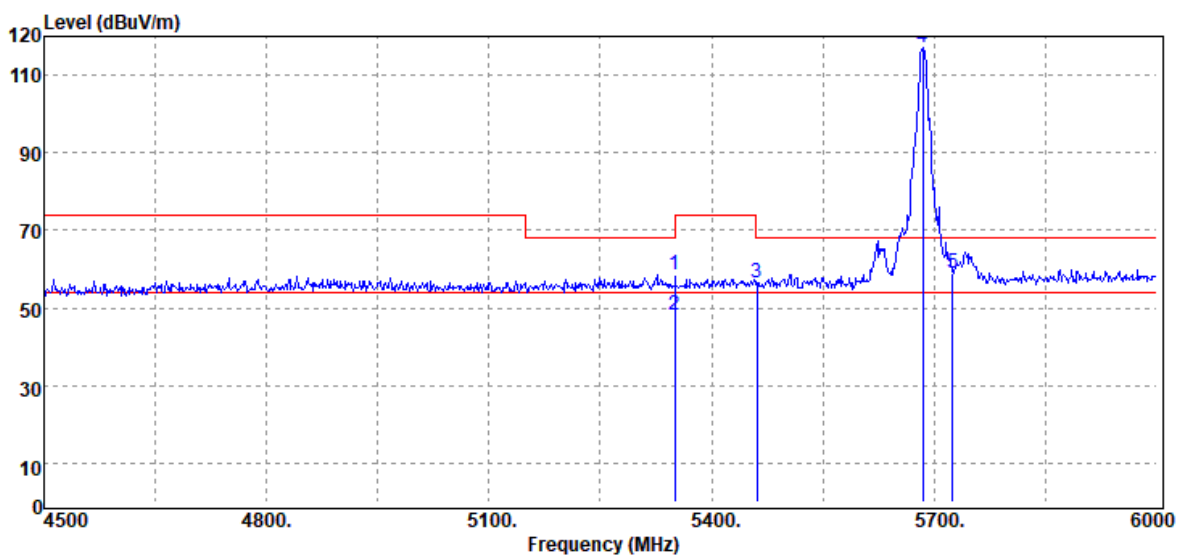

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5350.00	Peak	38.62	19.82	58.44	74.00	-15.56
5350.00	Average	28.42	19.82	48.24	54.00	-5.76
5461.50	Peak	36.34	20.06	56.40	68.20	-11.80
5685.00	Peak	96.88	20.16	117.04	-	-
5725.00	Peak	38.79	20.31	59.10	68.20	-9.10

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

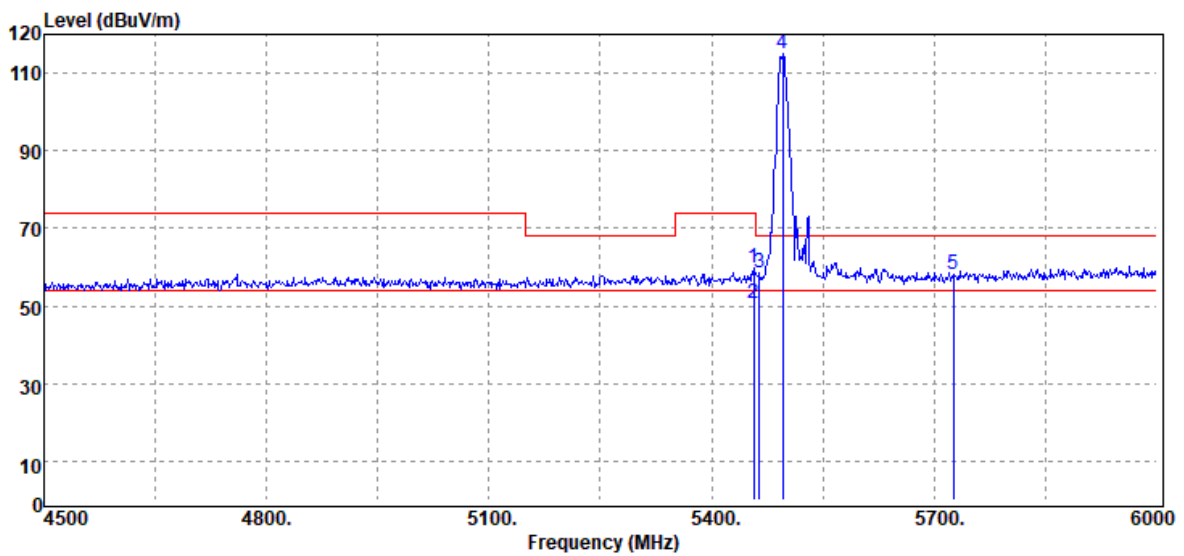

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.00	Peak	39.87	20.07	59.94	74.00	-14.06
5457.00	Average	30.77	20.07	50.84	54.00	-3.16
5464.50	Peak	38.41	20.05	58.46	68.20	-9.74
5496.00	Peak	95.04	20.03	115.07	-	-
5725.50	Peak	37.72	20.32	58.04	68.20	-10.16