


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

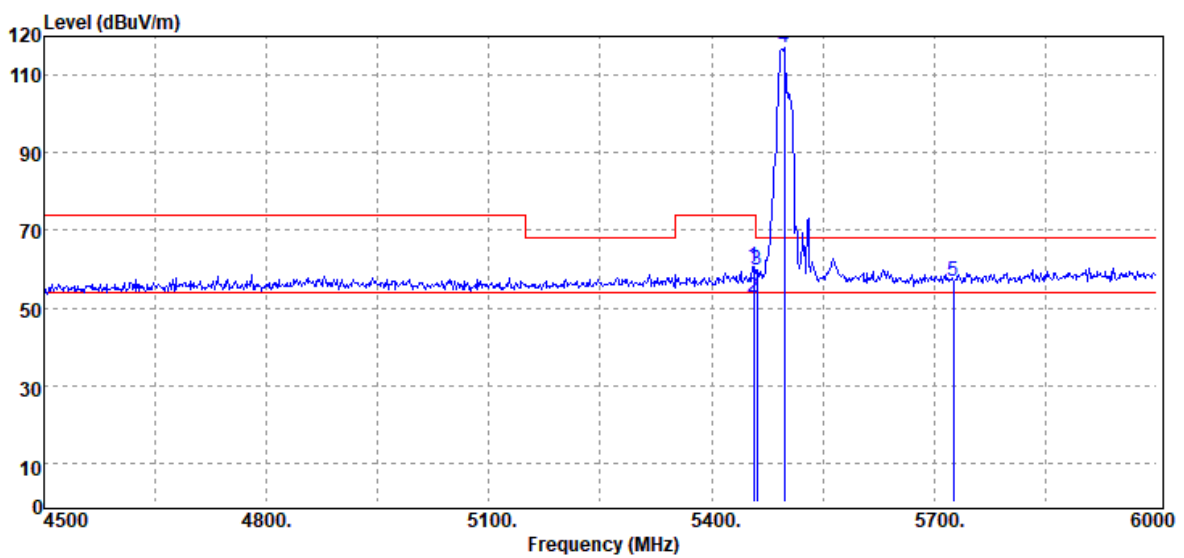


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.00	Peak	40.62	20.07	60.69	74.00	-13.31
5457.00	Average	32.61	20.07	52.68	54.00	-1.32
5461.50	Peak	39.79	20.06	59.85	68.20	-8.35
5497.50	Peak	96.90	20.02	116.92	-	-
5725.50	Peak	36.69	20.32	57.01	68.20	-11.19

Report No.: T210319W02-RP2

Test Data for UNII-3


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

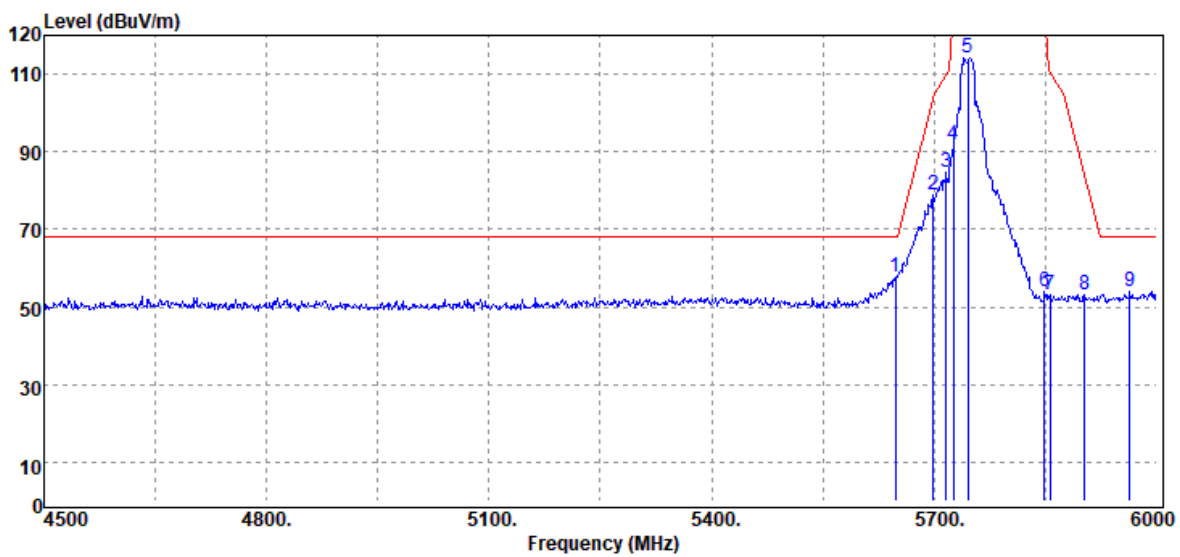

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5647.50	Peak	37.76	20.15	57.91	68.20	-10.29
5698.50	Peak	58.89	20.16	79.05	104.09	-25.04
5716.50	Peak	64.39	20.27	84.66	109.82	-25.16
5725.00	Peak	71.42	20.31	91.73	122.20	-30.47
5745.00	Peak	93.86	20.45	114.31	-	-
5850.00	Peak	33.15	20.73	53.88	122.20	-68.32
5856.00	Peak	32.31	20.76	53.07	110.52	-57.45
5902.50	Peak	32.29	20.95	53.24	84.85	-31.61
5964.00	Peak	32.70	21.16	53.86	68.20	-14.34

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

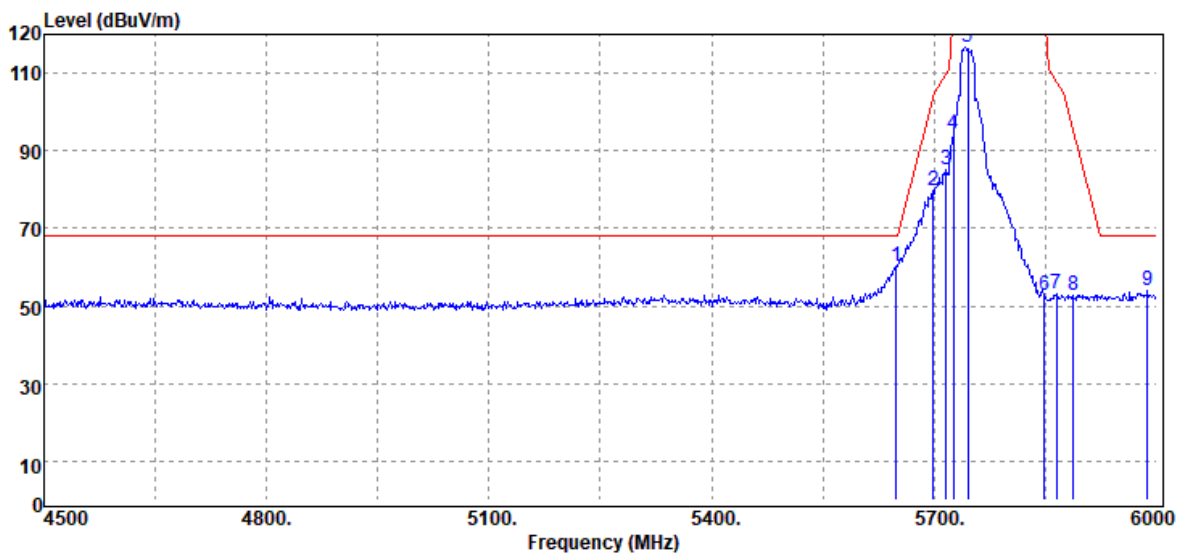

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5649.00	Peak	40.15	20.15	60.30	68.20	-7.90
5698.50	Peak	59.51	20.16	79.67	104.09	-24.42
5716.50	Peak	64.83	20.27	85.10	109.82	-24.72
5725.00	Peak	73.84	20.31	94.15	122.20	-28.05
5745.00	Peak	96.17	20.45	116.62	-	-
5850.00	Peak	32.11	20.73	52.84	122.20	-69.36
5865.00	Peak	32.31	20.80	53.11	108.00	-54.89
5887.50	Peak	32.01	20.89	52.90	95.95	-43.05
5988.00	Peak	32.78	21.17	53.95	68.20	-14.25

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.3(°C)/ 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

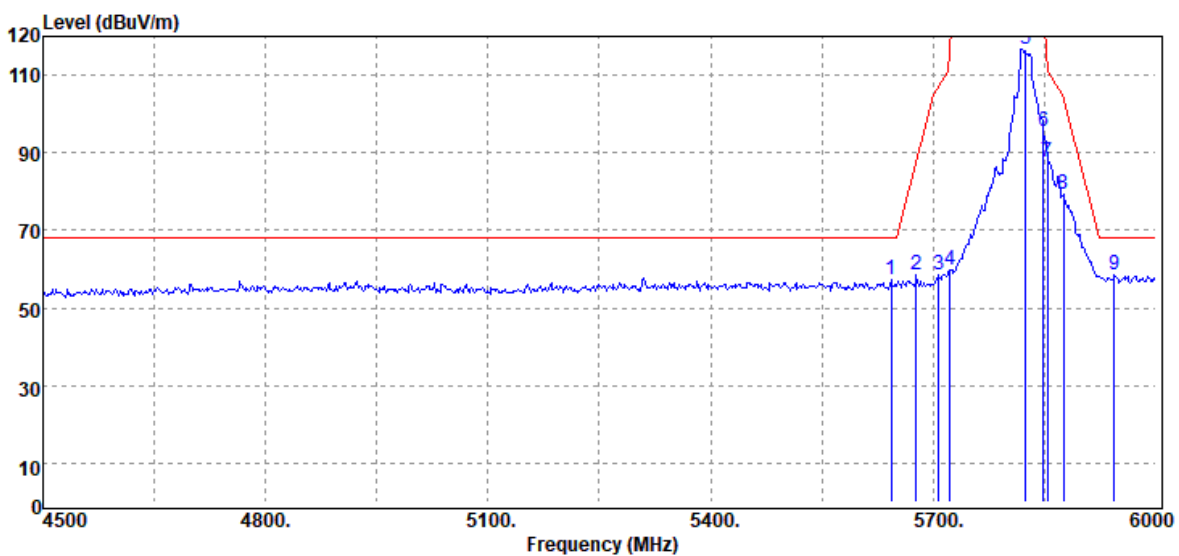

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5643.00	Peak	37.02	20.14	57.16	68.20	-11.04
5677.50	Peak	38.19	20.16	58.35	88.55	-30.20
5707.50	Peak	38.48	20.21	58.69	107.30	-48.61
5722.50	Peak	39.51	20.31	59.82	116.50	-56.68
5825.00	Peak	96.03	20.63	116.66	-	-
5850.00	Peak	74.89	20.73	95.62	122.20	-26.58
5854.50	Peak	66.87	20.75	87.62	111.94	-24.32
5875.50	Peak	58.63	20.85	79.48	104.83	-25.35
5944.50	Peak	37.57	21.14	58.71	68.20	-9.49

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.3(°C)/ 54%RH
Test Item	Band Edge	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

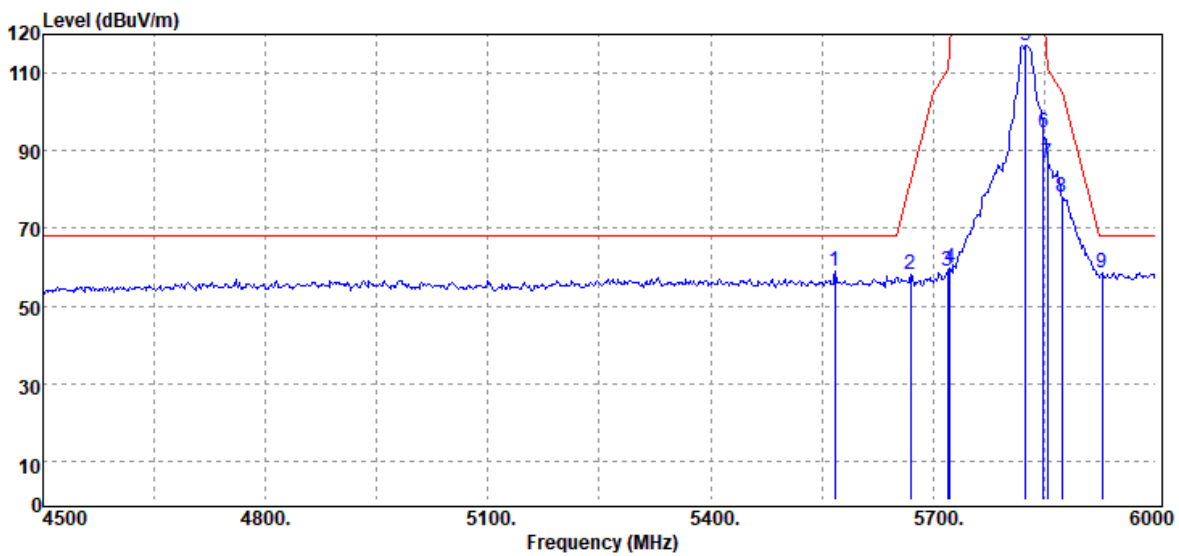

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5568.00	Peak	38.78	20.05	58.83	68.20	-9.37
5670.00	Peak	37.79	20.15	57.94	83.00	-25.06
5719.50	Peak	38.71	20.29	59.00	110.66	-51.66
5722.50	Peak	39.60	20.31	59.91	116.50	-56.59
5825.00	Peak	96.62	20.63	117.25	-	-
5850.00	Peak	74.03	20.73	94.76	122.20	-27.44
5854.50	Peak	66.14	20.75	86.89	111.94	-25.05
5874.00	Peak	57.30	20.83	78.13	105.48	-27.35
5928.00	Peak	37.44	21.07	58.51	68.20	-9.69


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5745 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

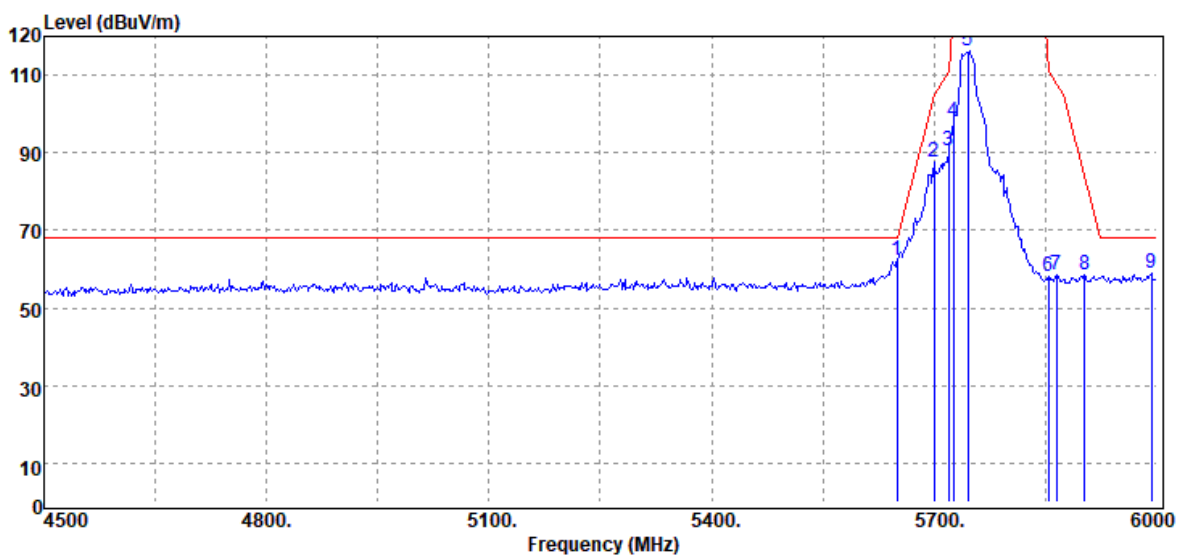


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.50	Peak	42.08	20.15	62.23	68.57	-6.34
5700.00	Peak	67.32	20.16	87.48	105.20	-17.72
5719.50	Peak	70.19	20.29	90.48	110.66	-20.18
5725.00	Peak	77.48	20.31	97.79	122.20	-24.41
5745.00	Peak	95.74	20.45	116.19	-	-
5854.50	Peak	37.48	20.75	58.23	111.94	-53.71
5865.00	Peak	37.55	20.80	58.35	108.00	-49.65
5902.50	Peak	37.62	20.95	58.57	84.85	-26.28
5992.50	Peak	37.87	21.17	59.04	68.20	-9.16

Test Mode	IEEE 802.11n 20 / 5745 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

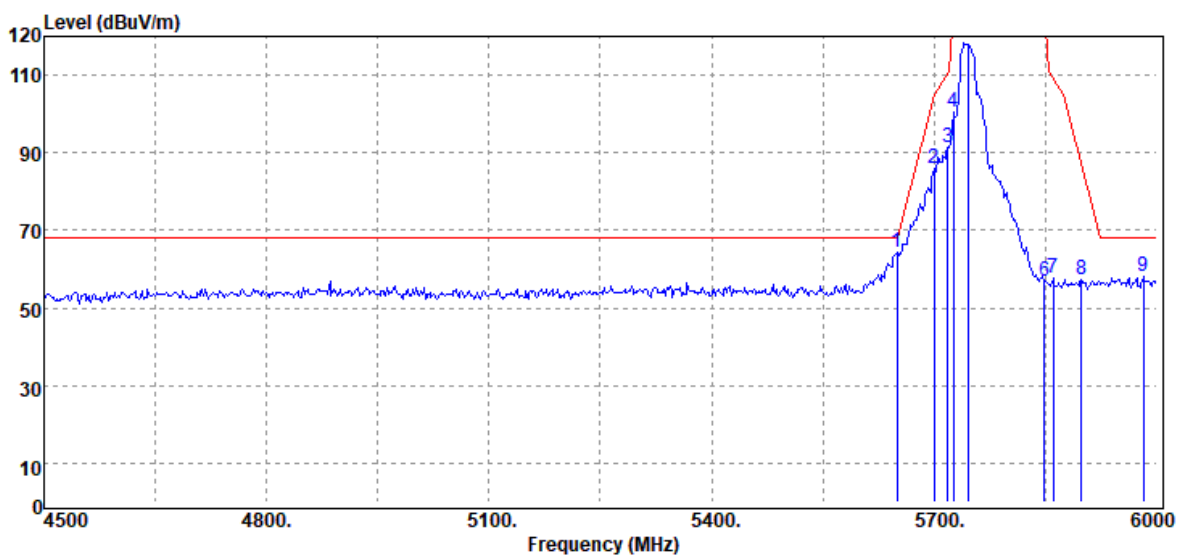

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.50	Peak	44.01	20.15	64.16	68.57	-4.41
5700.00	Peak	65.76	20.16	85.92	105.20	-19.28
5718.00	Peak	71.21	20.28	91.49	110.24	-18.75
5725.00	Peak	80.17	20.31	100.48	122.20	-21.72
5745.00	Peak	98.09	20.45	118.54	-	-
5850.00	Peak	35.99	20.73	56.72	122.20	-65.48
5860.50	Peak	36.97	20.77	57.74	109.26	-51.52
5898.00	Peak	36.31	20.95	57.26	88.18	-30.92
5982.00	Peak	37.17	21.17	58.34	68.20	-9.86


Test Mode	IEEE 802.11n 20 / 5825 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

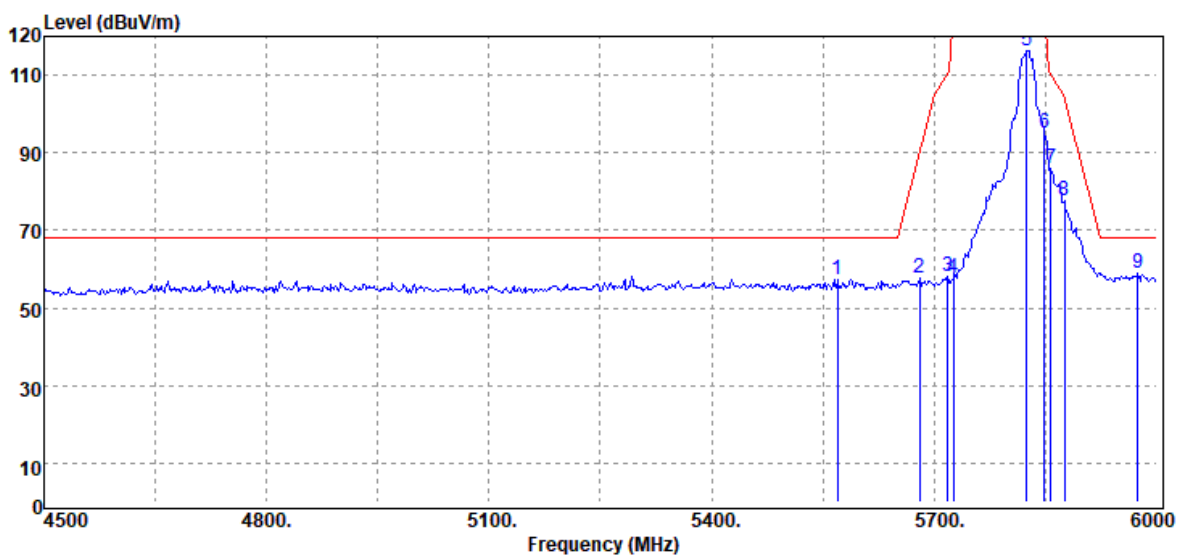

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5569.50	Peak	37.26	20.05	57.31	68.20	-10.89
5680.50	Peak	37.42	20.16	57.58	90.77	-33.19
5718.00	Peak	37.76	20.28	58.04	110.24	-52.20
5725.00	Peak	37.56	20.31	57.87	122.20	-64.33
5825.00	Peak	95.72	20.63	116.35	-	-
5850.00	Peak	74.48	20.73	95.21	122.20	-26.99
5857.50	Peak	65.05	20.76	85.81	110.10	-24.29
5875.50	Peak	56.68	20.85	77.53	104.83	-27.30
5974.50	Peak	37.95	21.16	59.11	68.20	-9.09

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11n 20 / 5825 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Band Edge	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

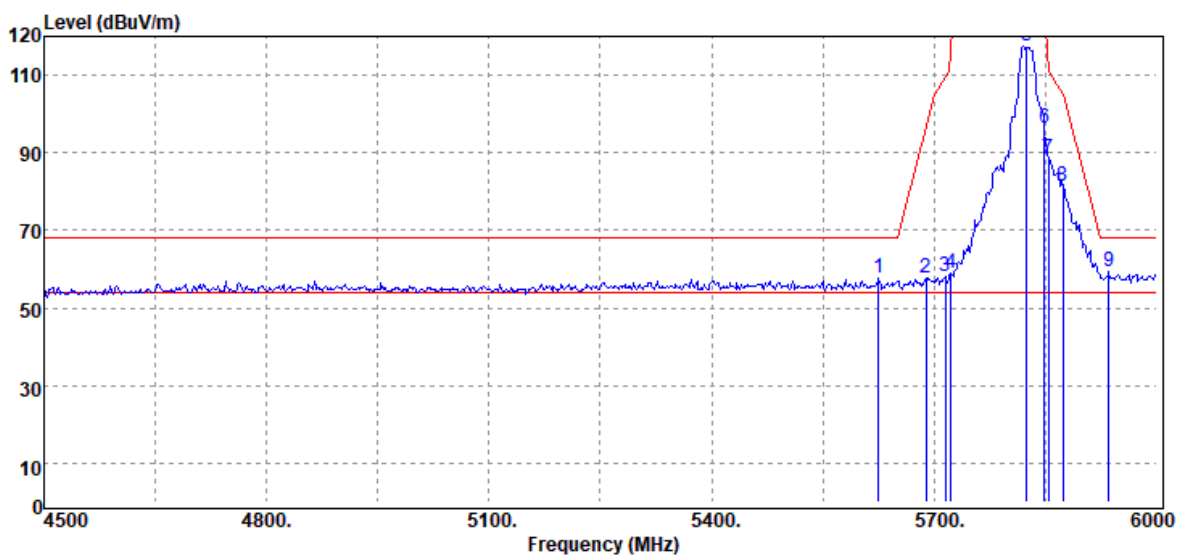

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5625.00	Peak	37.41	20.11	57.52	68.20	-10.68
5689.50	Peak	37.54	20.15	57.69	97.43	-39.74
5715.00	Peak	37.91	20.26	58.17	109.40	-51.23
5722.50	Peak	38.48	20.31	58.79	116.50	-57.71
5825.00	Peak	97.07	20.63	117.70	-	-
5825.00	Peak	75.51	20.73	96.24	122.20	-25.96
5854.50	Peak	67.85	20.75	88.60	111.94	-23.34
5874.00	Peak	60.63	20.83	81.46	105.48	-24.02
5935.50	Peak	38.19	21.09	59.28	68.20	-8.92


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

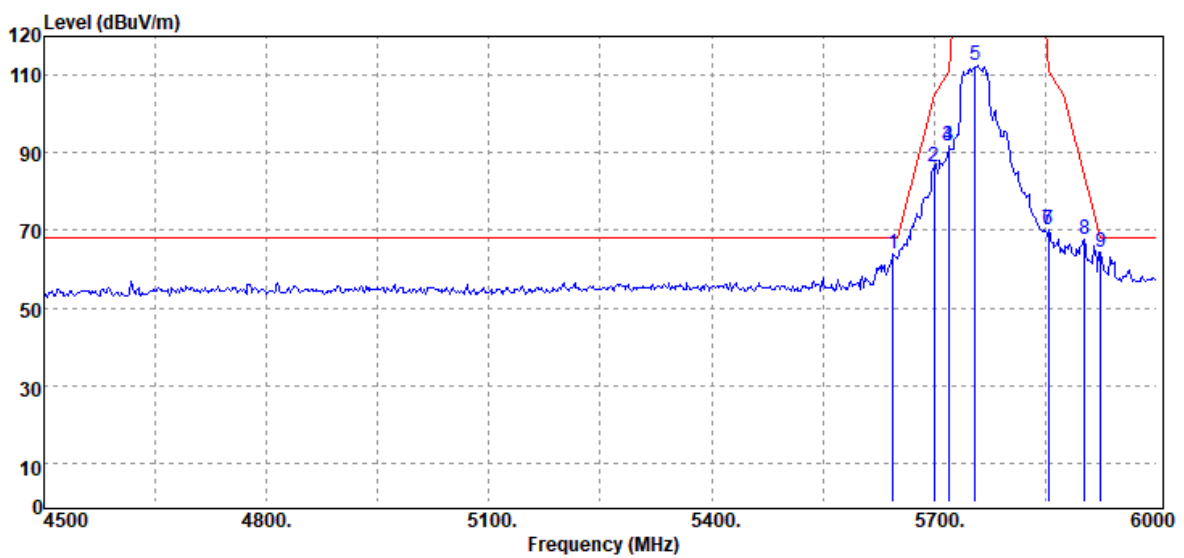


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5644.50	Peak	43.94	20.14	64.08	68.20	-4.12
5700.00	Peak	66.24	20.16	86.40	105.20	-18.80
5719.50	Peak	71.35	20.29	91.64	110.66	-19.02
5725.00	Peak	71.35	20.31	91.66	122.20	-30.54
5755.00	Peak	92.07	20.48	112.55	-	-
5850.00	Peak	49.50	20.73	70.23	122.20	-51.97
5854.50	Peak	49.50	20.75	70.25	111.94	-41.69
5902.50	Peak	46.63	20.95	67.58	84.85	-17.27
5925.00	Peak	43.22	21.06	64.28	68.20	-3.92

Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

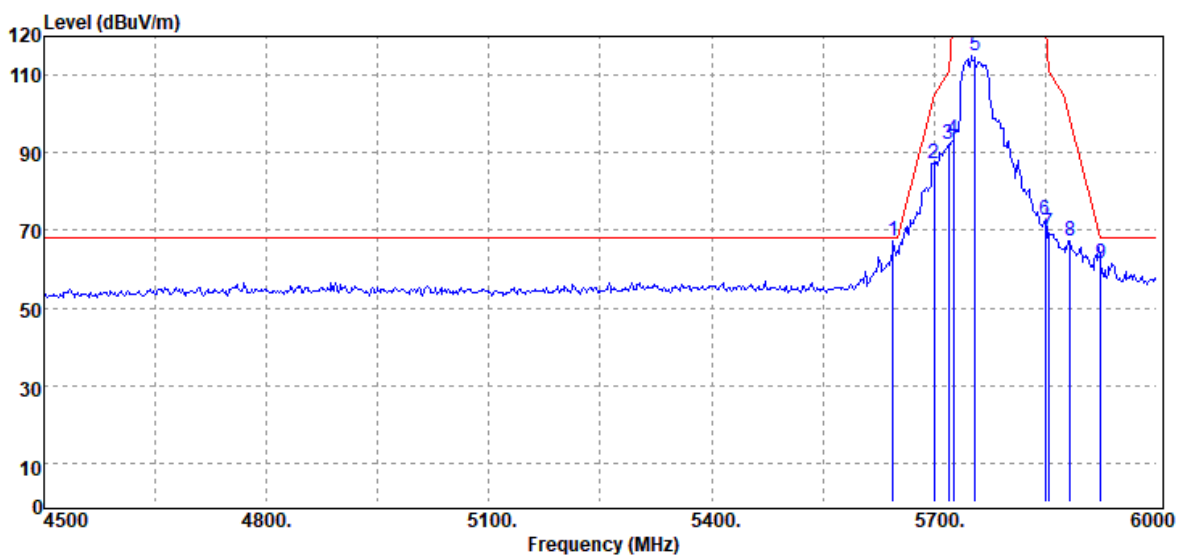


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5644.50	Peak	47.12	20.14	67.26	68.20	-0.94
5700.00	Peak	67.22	20.16	87.38	105.20	-17.82
5719.50	Peak	72.00	20.29	92.29	110.66	-18.37
5725.00	Peak	73.22	20.31	93.53	122.20	-28.67
5755.00	Peak	94.36	20.48	114.84	-	-
5850.00	Peak	51.77	20.73	72.50	122.20	-49.70
5854.50	Peak	48.64	20.75	69.39	111.94	-42.55
5883.00	Peak	46.27	20.88	67.15	99.28	-32.13
5925.00	Peak	40.55	21.06	61.61	68.20	-6.59

Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

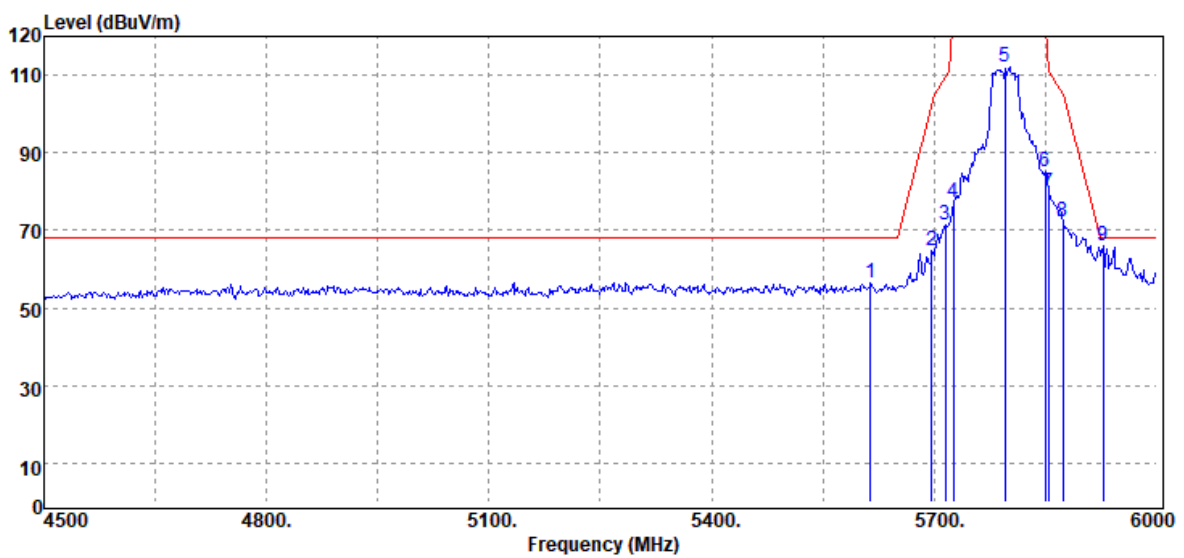

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5614.50	Peak	36.41	20.10	56.51	68.20	-11.69
5697.00	Peak	44.69	20.16	64.85	102.98	-38.13
5715.00	Peak	51.17	20.26	71.43	109.40	-37.97
5725.00	Peak	57.07	20.31	77.38	122.20	-44.82
5795.00	Peak	91.52	20.54	112.06	-	-
5850.00	Peak	64.47	20.73	85.20	122.20	-37.00
5854.50	Peak	58.87	20.75	79.62	111.94	-32.32
5874.00	Peak	51.42	20.83	72.25	105.48	-33.23
5928.00	Peak	44.83	21.07	65.90	68.20	-2.30


Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	21.1(°C) / 55%RH
Test Item	Band Edge	Test Date	November 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

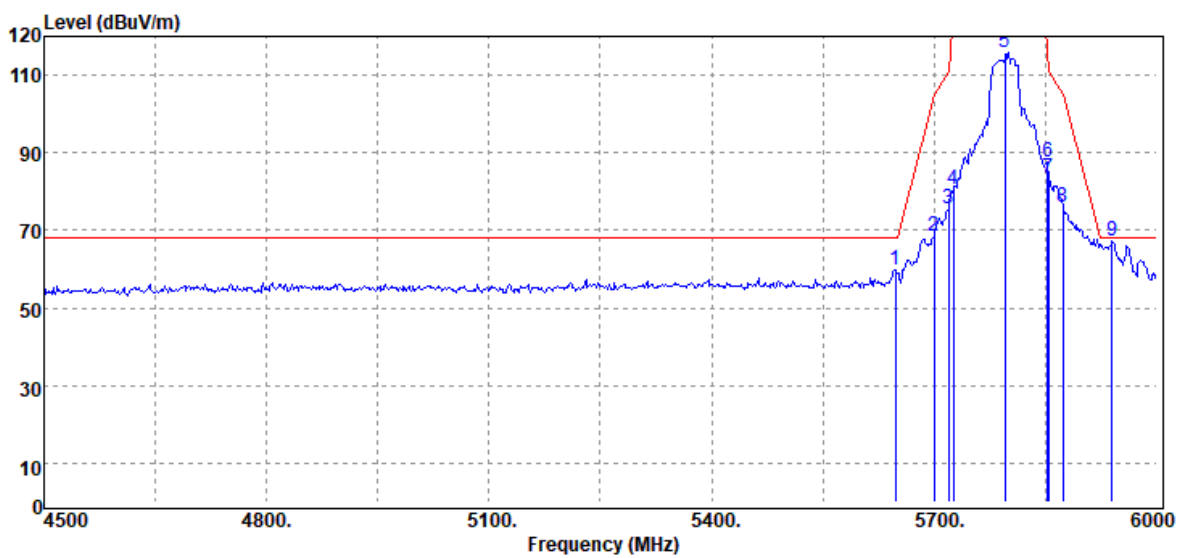

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
5647.50	Peak	39.69	20.15	59.84	68.20	-8.36
5700.00	Peak	48.43	20.16	68.59	105.20	-36.61
5719.50	Peak	55.11	20.29	75.40	110.66	-35.26
5725.00	Peak	60.24	20.31	80.55	122.20	-69.45
5795.00	Peak	95.25	20.54	115.79	-	-
5853.00	Peak	66.90	20.74	87.64	115.36	-27.72
5854.50	Peak	62.51	20.75	83.26	111.94	-28.68
5874.00	Peak	55.26	20.83	76.09	105.48	-29.39
5940.00	Peak	46.03	21.12	67.15	68.20	-1.05

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

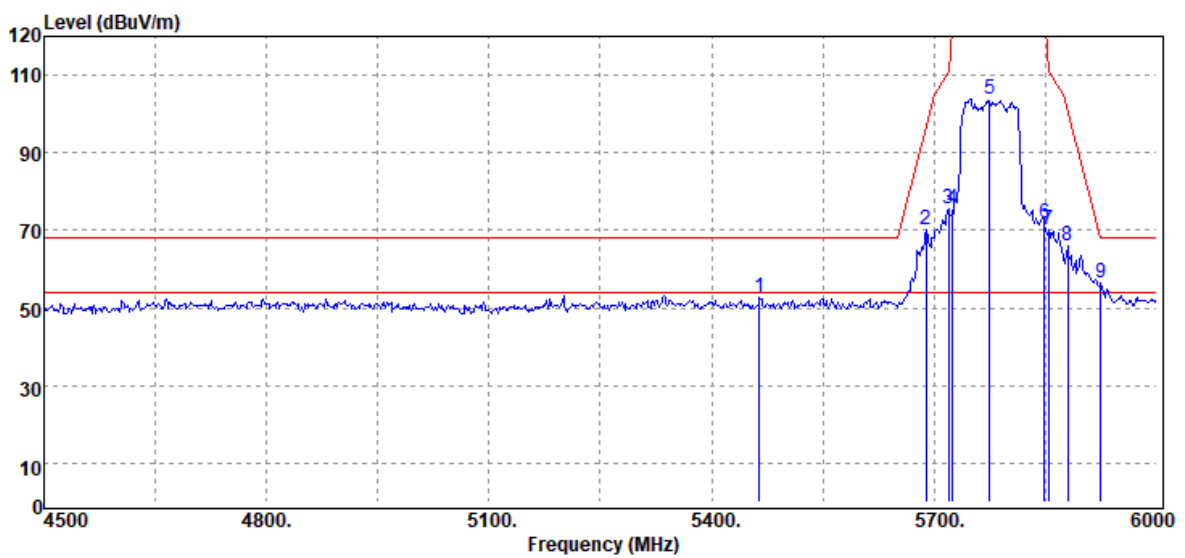

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5464.50	Peak	32.64	20.05	52.69	68.20	-15.51
5689.50	Peak	49.87	20.15	70.02	97.43	-27.41
5719.50	Peak	55.42	20.29	75.71	110.66	-34.95
5725.00	Peak	55.40	20.31	75.71	122.20	-46.49
5775.00	Peak	83.14	20.51	103.65	-	-
5848.50	Peak	50.91	20.73	71.64	150.00	-78.36
5854.50	Peak	49.25	20.75	70.00	111.94	-41.94
5880.00	Peak	45.16	20.86	66.02	101.50	-35.48
5925.00	Peak	35.38	21.06	56.44	68.20	-11.76

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	20.9(°C) / 56%RH
Test Item	Band Edge	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

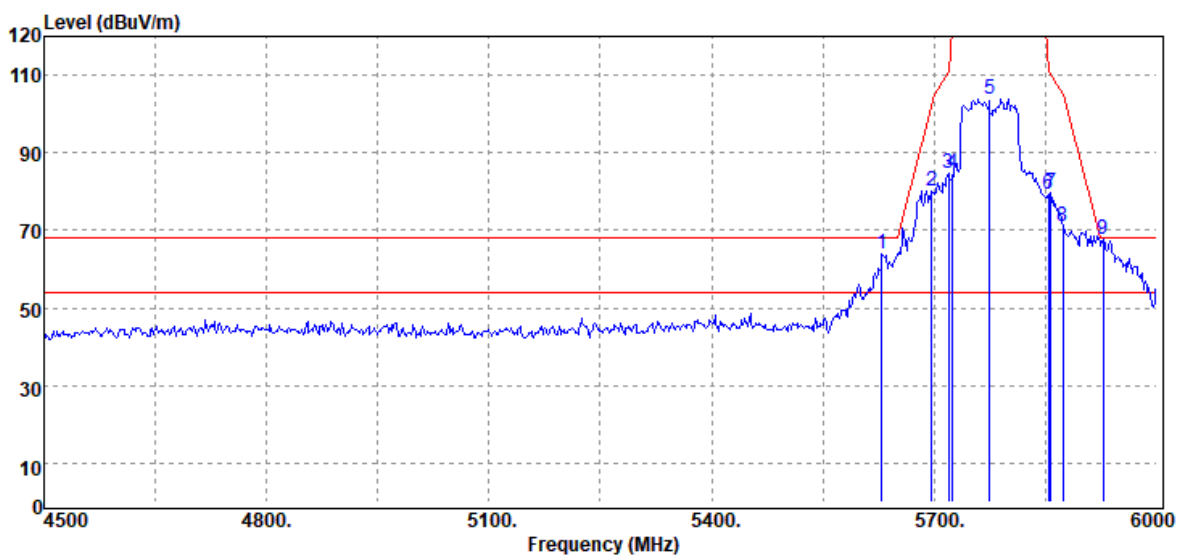

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5629.50	Peak	43.82	20.11	63.93	68.20	-4.27
5697.00	Peak	60.00	20.16	80.16	102.98	-22.82
5719.50	Peak	64.34	20.29	84.63	110.66	-26.03
5725.00	Peak	64.32	20.31	84.63	122.20	-37.57
5775.00	Peak	83.46	20.51	103.97	-	-
5854.50	Peak	58.48	20.75	79.23	111.94	-32.71
5857.50	Peak	59.09	20.76	79.85	110.10	-30.25
5874.00	Peak	50.35	20.83	71.18	105.48	-34.30
5928.00	Peak	46.73	21.07	67.80	68.20	-0.40

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	20.6(°C) / 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

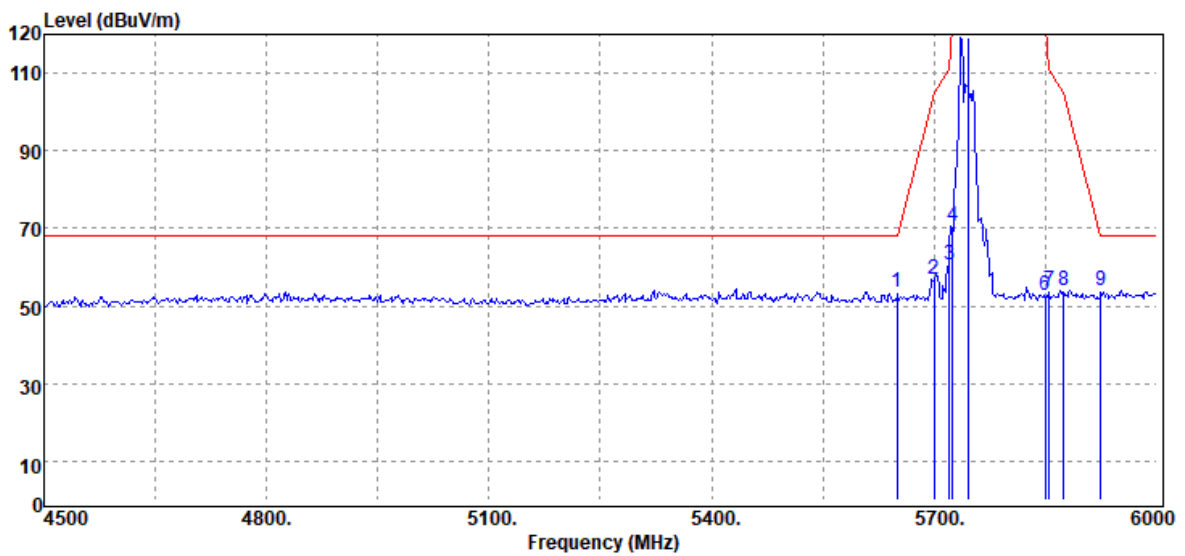

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.56	20.15	53.71	68.20	-14.49
5700.00	Peak	36.56	20.16	56.72	105.20	-48.48
5720.00	Peak	40.16	20.29	60.45	110.80	-50.35
5725.00	Peak	50.24	20.31	70.55	122.20	-51.65
5745.00	Peak	98.75	20.45	119.20	-	-
5850.00	Peak	32.20	20.73	52.93	122.20	-69.27
5855.00	Peak	33.15	20.76	53.91	110.80	-56.89
5875.00	Peak	33.05	20.84	53.89	105.20	-51.31
5925.00	Peak	32.79	21.06	53.85	68.20	-14.35

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

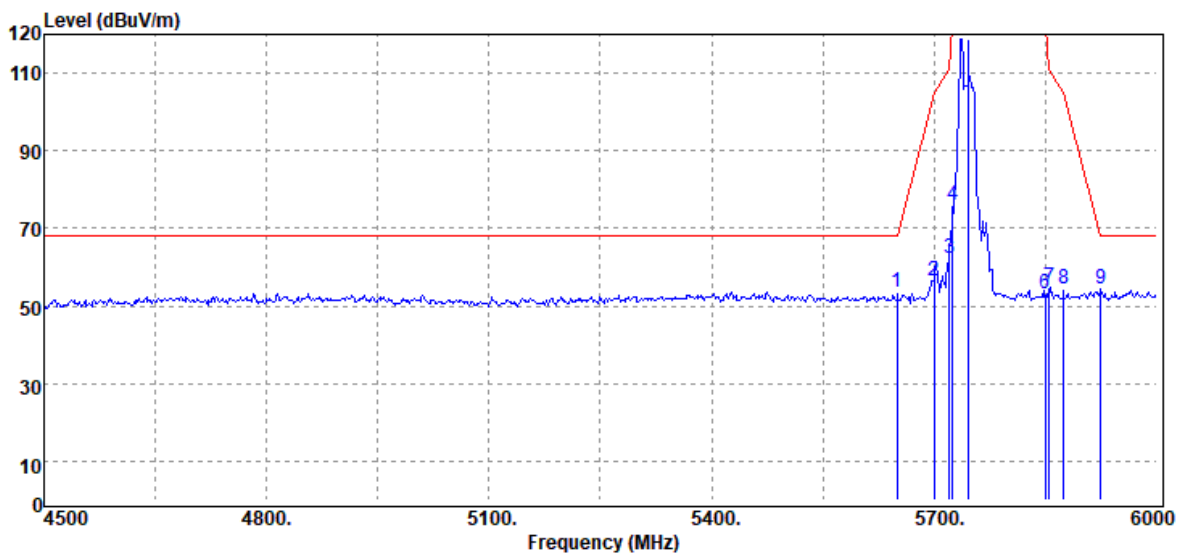

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.21	20.15	53.36	68.20	-14.84
5700.00	Peak	36.50	20.16	56.66	105.20	-48.54
5720.00	Peak	41.95	20.29	62.24	110.80	-48.56
5725.00	Peak	55.55	20.31	75.86	122.20	-46.34
5745.00	Peak	98.37	20.45	118.82	-	-
5850.00	Peak	32.23	20.73	52.96	122.20	-69.24
5855.00	Peak	33.86	20.76	54.62	110.80	-56.18
5875.00	Peak	33.64	20.84	54.48	105.20	-50.72
5925.00	Peak	33.42	21.06	54.48	68.20	-13.72

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

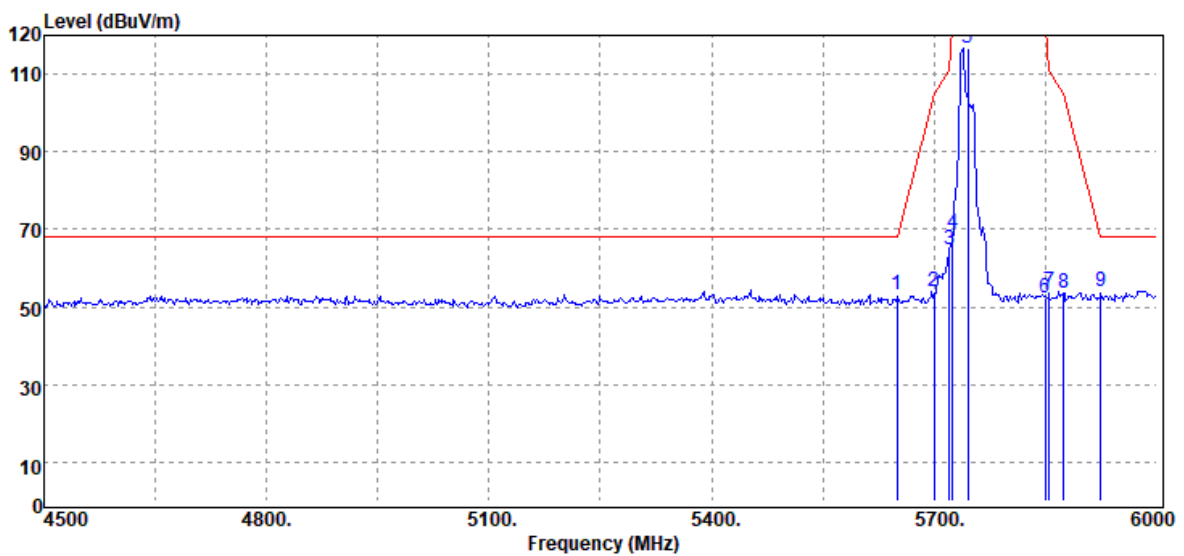

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.03	20.15	53.18	68.20	-15.02
5700.00	Peak	33.63	20.16	53.79	105.20	-51.41
5720.00	Peak	44.35	20.29	64.64	110.80	-46.16
5725.00	Peak	48.76	20.31	69.07	122.20	-53.13
5745.00	Peak	96.02	20.45	116.47	-	-
5850.00	Peak	31.73	20.73	52.46	122.20	-69.74
5855.00	Peak	33.26	20.76	54.02	110.80	-56.78
5875.00	Peak	32.84	20.84	53.68	105.20	-51.52
5925.00	Peak	33.08	21.06	54.14	68.20	-14.06

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

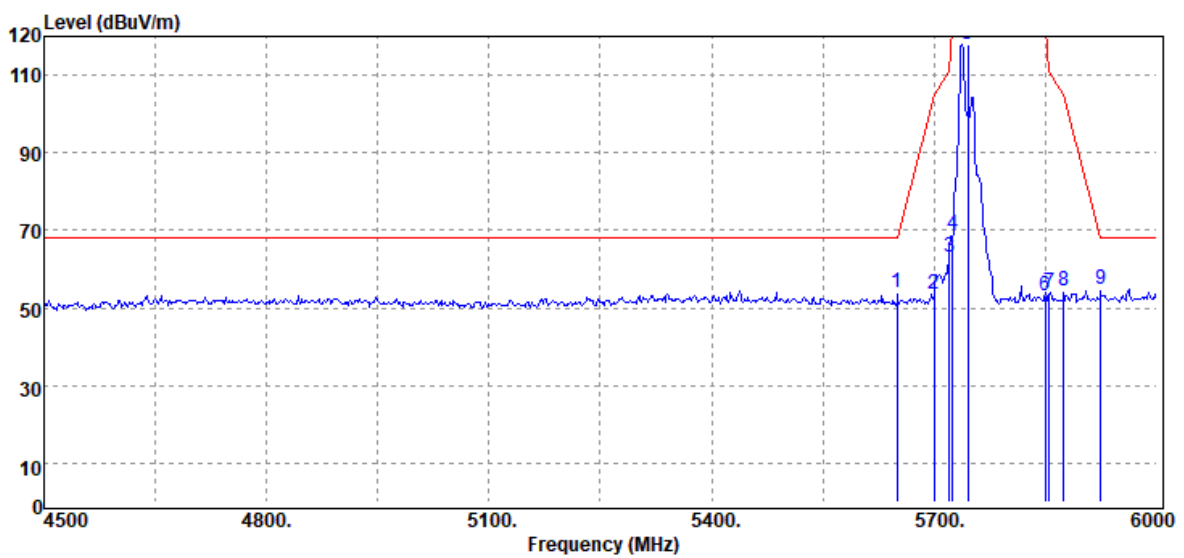

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.66	20.15	53.81	68.20	-14.39
5700.00	Peak	33.48	20.16	53.64	105.20	-51.56
5720.00	Peak	42.90	20.29	63.19	110.80	-47.61
5725.00	Peak	48.70	20.31	69.01	122.20	-53.19
5745.00	Peak	97.66	20.45	118.11	-	-
5850.00	Peak	32.62	20.73	53.35	122.20	-68.85
5855.00	Peak	33.04	20.76	53.80	110.80	-57.00
5875.00	Peak	33.37	20.84	54.21	105.20	-50.99
5925.00	Peak	33.60	21.06	54.66	68.20	-13.54

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

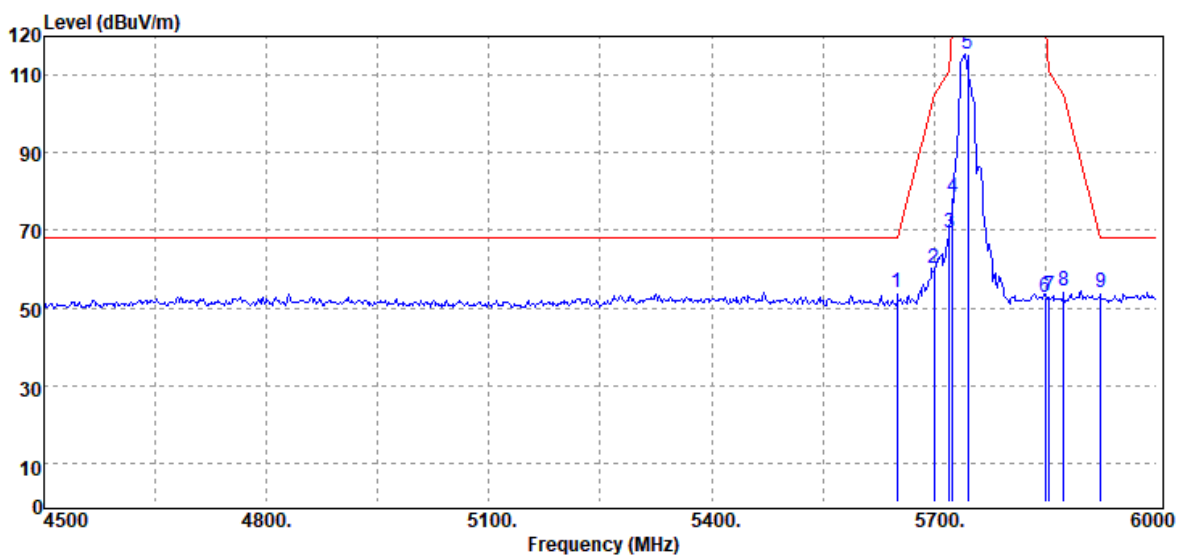

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.68	20.15	53.83	68.20	-14.37
5700.00	Peak	39.84	20.16	60.00	105.20	-45.20
5720.00	Peak	49.17	20.29	69.46	110.80	-41.34
5725.00	Peak	58.26	20.31	78.57	122.20	-43.63
5745.00	Peak	94.96	20.45	115.41	-	-
5850.00	Peak	32.13	20.73	52.86	122.20	-69.34
5855.00	Peak	32.19	20.76	52.95	110.80	-57.85
5875.00	Peak	33.58	20.84	54.42	105.20	-50.78
5925.00	Peak	32.77	21.06	53.83	68.20	-14.37

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

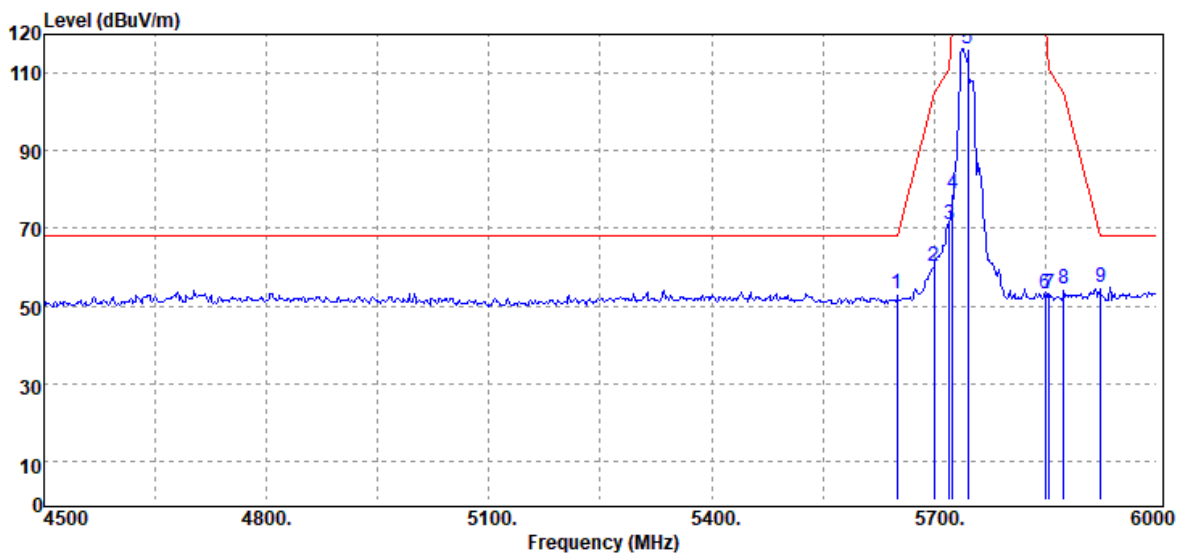

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.92	20.15	53.07	68.20	-15.13
5700.00	Peak	39.94	20.16	60.10	105.20	-45.10
5720.00	Peak	50.54	20.29	70.83	110.80	-39.97
5725.00	Peak	58.40	20.31	78.71	122.20	-43.49
5745.00	Peak	95.99	20.45	116.44	-	-
5850.00	Peak	32.44	20.73	53.17	122.20	-69.03
5855.00	Peak	32.41	20.76	53.17	110.80	-57.63
5875.00	Peak	33.42	20.84	54.26	105.20	-50.94
5925.00	Peak	33.73	21.06	54.79	68.20	-13.41

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

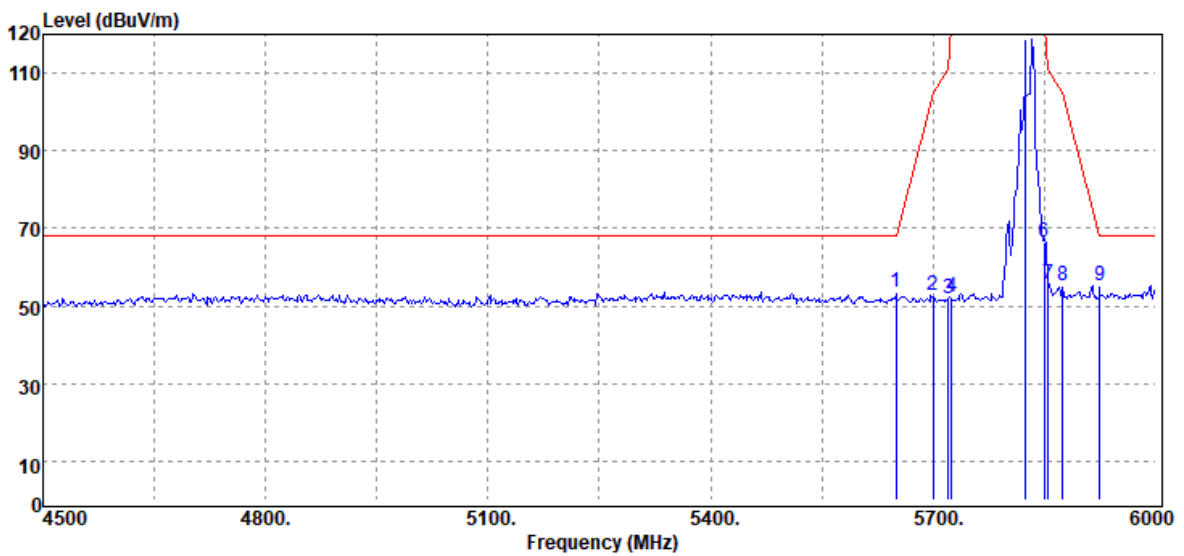

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.28	20.15	53.43	68.20	-14.77
5700.00	Peak	32.73	20.16	52.89	105.20	-52.31
5720.00	Peak	31.70	20.29	51.99	110.80	-58.81
5725.00	Peak	31.96	20.31	52.27	122.20	-69.93
5825.00	Peak	98.07	20.63	118.70	-	-
5850.00	Peak	45.63	20.73	66.36	122.20	-55.84
5855.00	Peak	35.08	20.76	55.84	110.80	-54.96
5875.00	Peak	34.52	20.84	55.36	105.20	-49.84
5925.00	Peak	34.21	21.06	55.27	68.20	-12.93

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

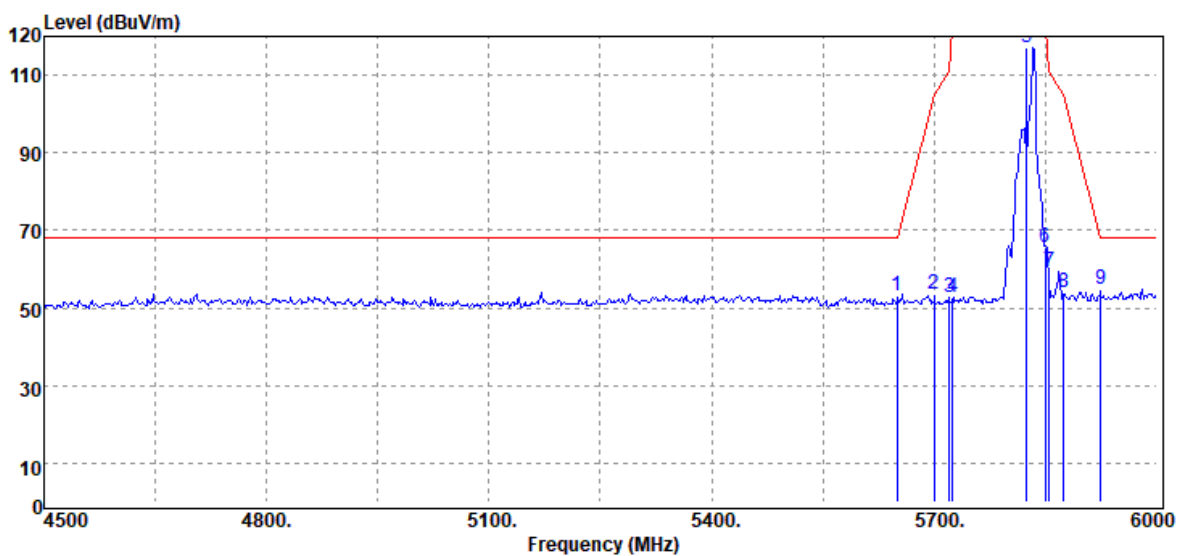

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.94	20.15	53.09	68.20	-15.11
5700.00	Peak	33.56	20.16	53.72	105.20	-51.48
5720.00	Peak	32.26	20.29	52.55	110.80	-58.25
5725.00	Peak	32.29	20.31	52.60	122.20	-69.60
5825.00	Peak	96.55	20.63	117.18	-	-
5850.00	Peak	44.95	20.73	65.68	122.20	-56.52
5855.00	Peak	38.79	20.76	59.55	110.80	-51.25
5875.00	Peak	32.96	20.84	53.80	105.20	-51.40
5925.00	Peak	33.60	21.06	54.66	68.20	-13.54

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

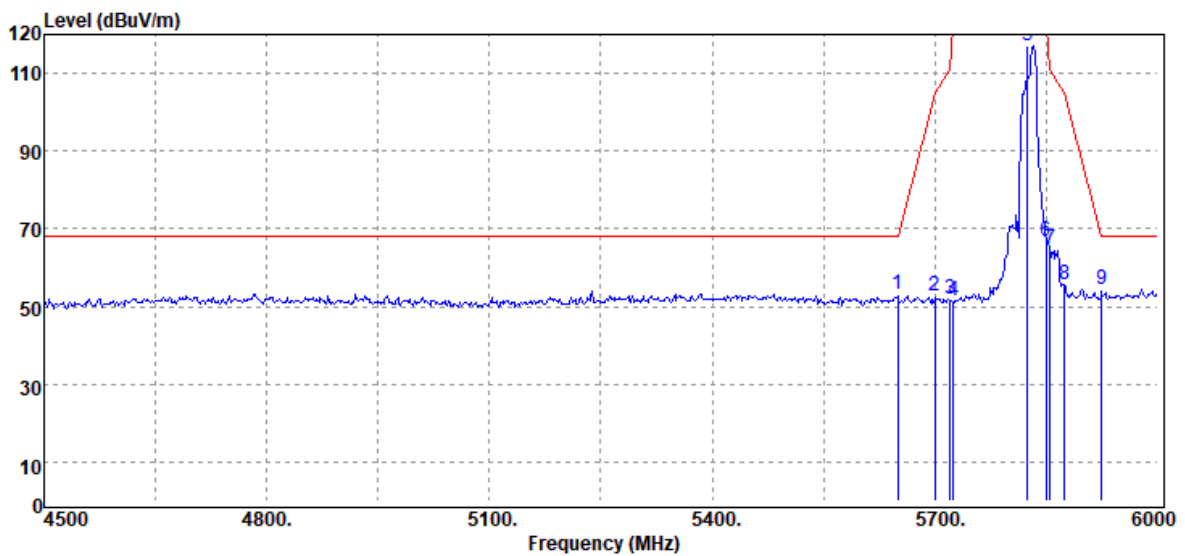

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	32.84	20.15	52.99	68.20	-15.21
5700.00	Peak	32.64	20.16	52.80	105.20	-52.40
5720.00	Peak	31.81	20.29	52.10	110.80	-58.70
5725.00	Peak	31.29	20.31	51.60	122.20	-70.60
5825.00	Peak	96.54	20.63	117.17	-	-
5850.00	Peak	46.00	20.73	66.73	122.20	-55.47
5855.00	Peak	44.02	20.76	64.78	110.80	-46.02
5875.00	Peak	34.66	20.84	55.50	105.20	-49.70
5925.00	Peak	33.15	21.06	54.21	68.20	-13.99

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

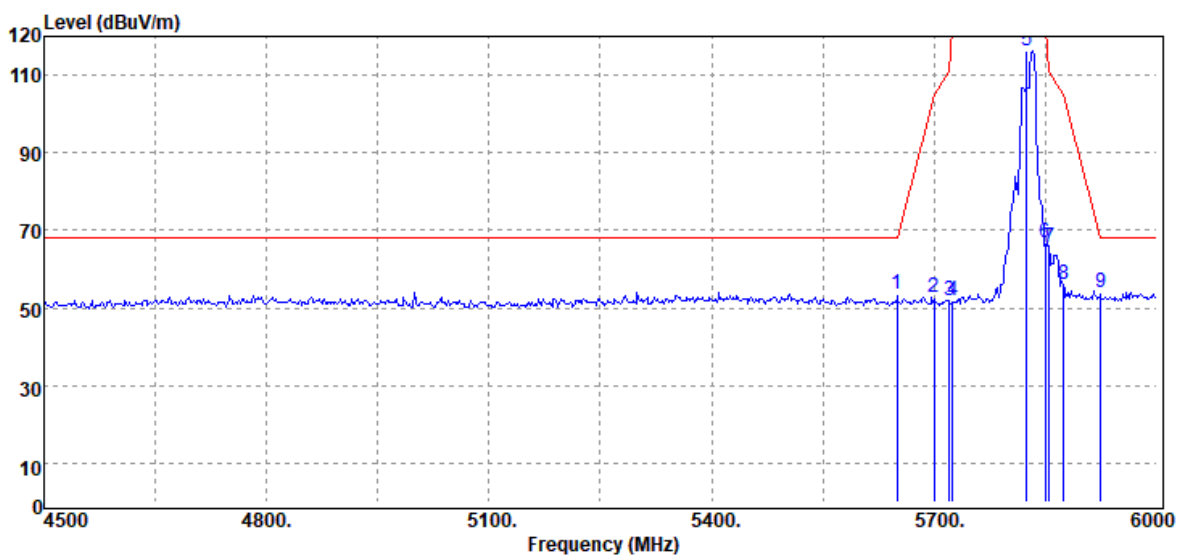

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.23	20.15	53.38	68.20	-14.82
5700.00	Peak	32.44	20.16	52.60	105.20	-52.60
5720.00	Peak	31.53	20.29	51.82	110.80	-58.98
5725.00	Peak	31.44	20.31	51.75	122.20	-70.45
5825.00	Peak	95.82	20.63	116.45	-	-
5850.00	Peak	45.94	20.73	66.67	122.20	-55.53
5855.00	Peak	44.77	20.76	65.53	110.80	-45.27
5875.00	Peak	35.16	20.84	56.00	105.20	-49.20
5925.00	Peak	33.07	21.06	54.13	68.20	-14.07


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

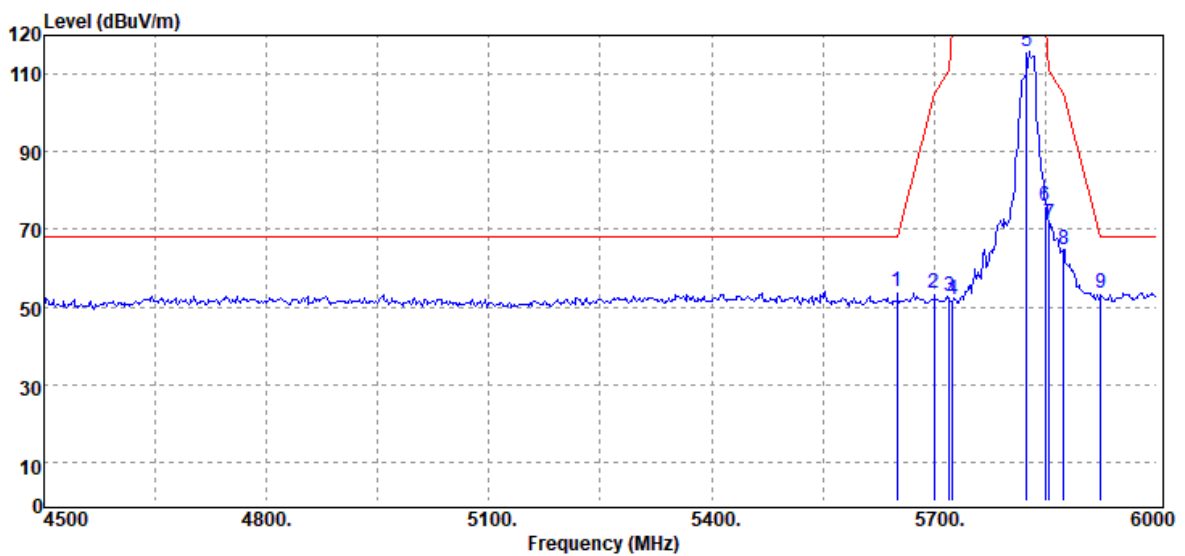

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.81	20.15	53.96	68.20	-14.24
5700.00	Peak	33.25	20.16	53.41	105.20	-51.79
5720.00	Peak	32.53	20.29	52.82	110.80	-57.98
5725.00	Peak	31.66	20.31	51.97	122.20	-70.23
5825.00	Peak	95.39	20.63	116.02	-	-
5850.00	Peak	55.10	20.73	75.83	122.20	-46.37
5855.00	Peak	50.61	20.76	71.37	110.80	-39.43
5875.00	Peak	44.06	20.84	64.90	105.20	-40.30
5925.00	Peak	32.58	21.06	53.64	68.20	-14.56


Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

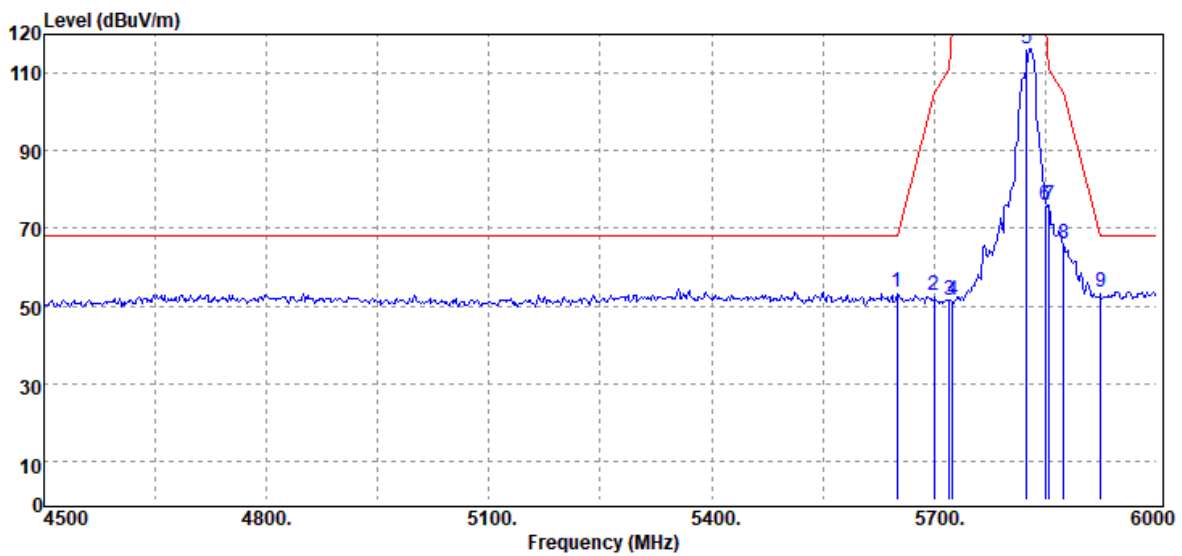

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.00	Peak	33.61	20.15	53.76	68.20	-14.44
5700.00	Peak	32.65	20.16	52.81	105.20	-52.39
5720.00	Peak	31.40	20.29	51.69	110.80	-59.11
5725.00	Peak	31.37	20.31	51.68	122.20	-70.52
5825.00	Peak	95.74	20.63	116.37	-	-
5850.00	Peak	55.32	20.73	76.05	122.20	-46.15
5855.00	Peak	55.27	20.76	76.03	110.80	-34.77
5875.00	Peak	45.01	20.84	65.85	105.20	-39.35
5925.00	Peak	32.70	21.06	53.76	68.20	-14.44


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

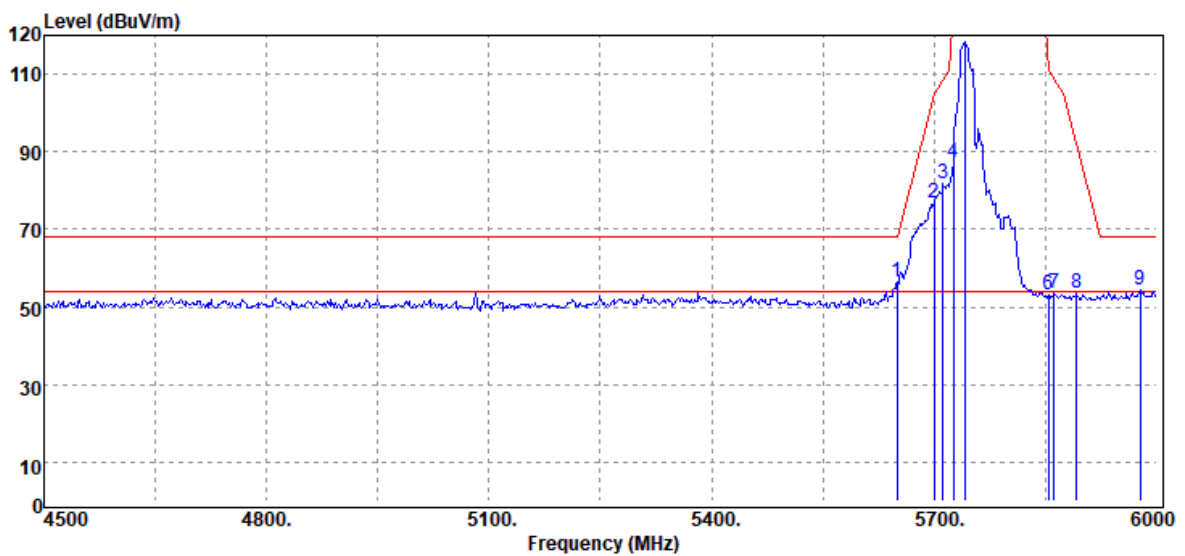

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5650.50	Peak	36.20	20.15	56.35	68.57	-12.22
5700.00	Peak	56.57	20.16	76.73	105.20	-28.47
5712.00	Peak	61.49	20.24	81.73	108.56	-26.83
5725.00	Peak	66.76	20.32	87.08	122.20	-35.12
5742.00	Peak	97.79	20.43	118.22	-	-
5854.50	Peak	32.20	20.75	52.95	111.94	-58.99
5862.00	Peak	32.97	20.78	53.75	108.84	-55.09
5892.00	Peak	32.47	20.91	53.38	92.62	-39.24
5977.50	Peak	33.27	21.17	54.44	68.20	-13.76


Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	20.6(°C) / 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

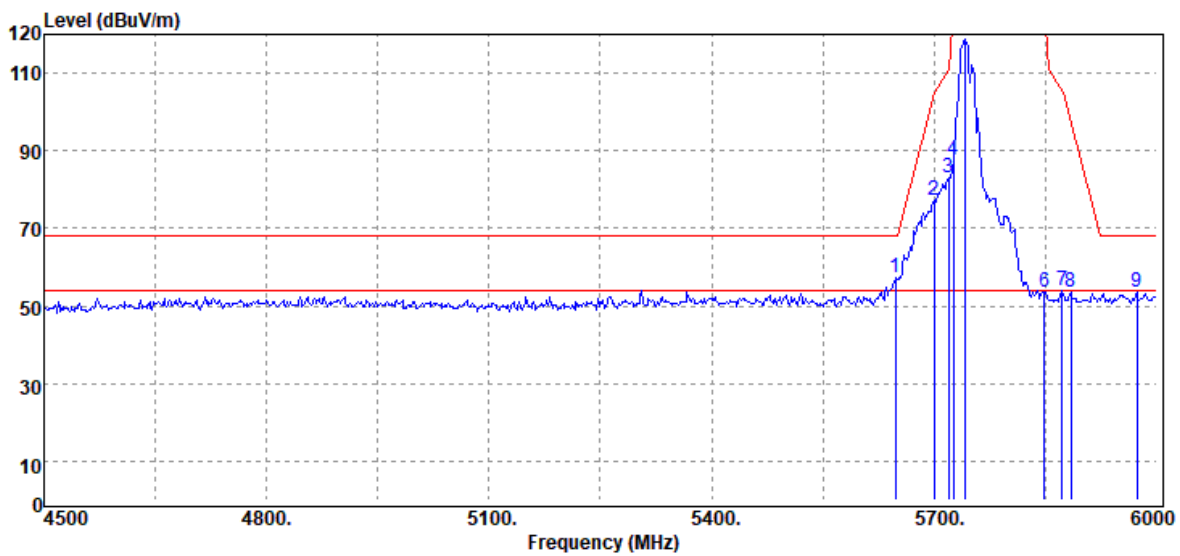

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5647.50	Peak	37.25	20.15	57.40	68.20	-10.80
5700.00	Peak	57.17	20.16	77.33	105.20	-27.87
5719.50	Peak	62.91	20.29	83.20	110.66	-27.46
5725.00	Peak	67.28	20.32	87.60	122.20	-34.60
5742.00	Peak	98.35	20.43	118.78	-	-
5850.00	Peak	32.75	20.73	53.48	122.20	-68.72
5872.50	Peak	33.11	20.82	53.93	105.90	-51.97
5884.50	Peak	32.87	20.88	53.75	98.17	-44.42
5973.00	Peak	32.34	21.16	53.50	68.20	-14.70


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

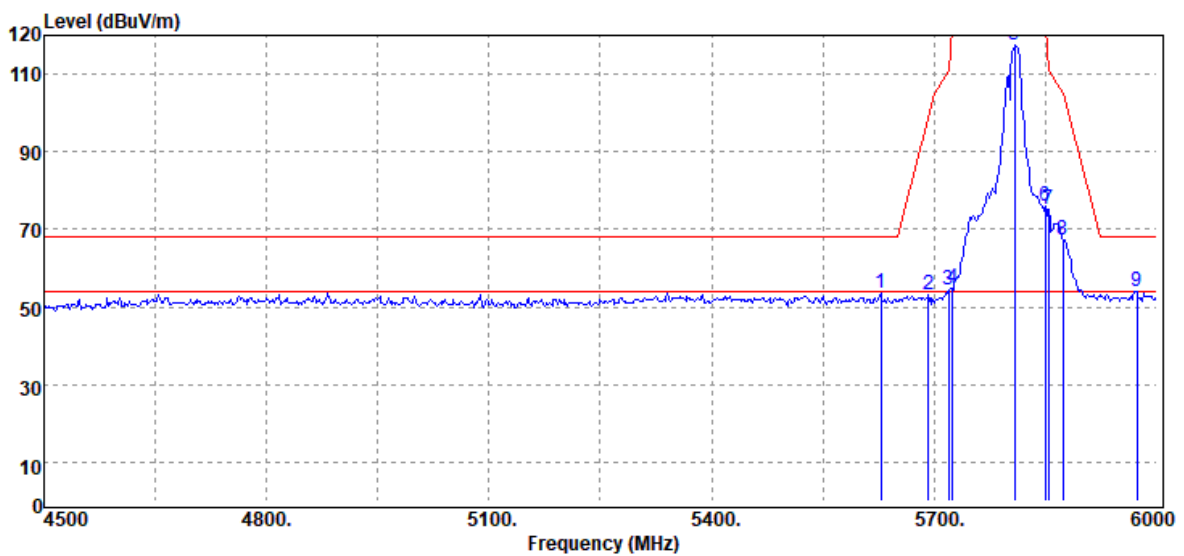

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5628.00	Peak	33.36	20.11	53.47	68.20	-14.73
5692.50	Peak	32.80	20.16	52.96	99.65	-46.69
5719.50	Peak	33.92	20.29	54.21	110.66	-56.45
5725.00	Peak	34.59	20.31	54.90	122.20	-67.30
5808.00	Peak	96.76	20.57	117.33	-	-
5850.00	Peak	55.17	20.73	75.90	122.20	-46.30
5854.50	Peak	54.24	20.75	74.99	111.94	-36.95
5874.00	Peak	46.59	20.83	67.42	105.48	-38.06
5973.00	Peak	32.85	21.16	54.01	68.20	-14.19


Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Band Edge	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

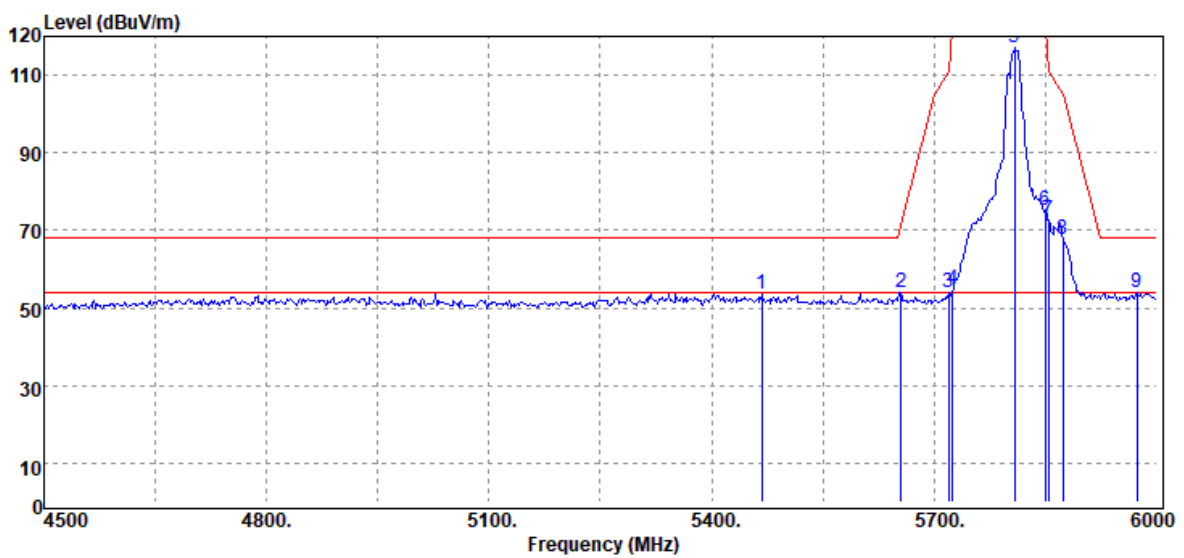

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5467.50	Peak	33.50	20.06	53.56	68.20	-14.64
5655.00	Peak	33.91	20.15	54.06	71.90	-17.84
5719.50	Peak	33.67	20.29	53.96	110.66	-56.70
5725.00	Peak	34.50	20.31	54.81	122.20	-67.39
5808.00	Peak	96.40	20.57	116.97	-	-
5850.00	Peak	54.52	20.73	75.25	122.20	-46.95
5854.50	Peak	51.85	20.75	72.60	111.94	-39.34
5874.00	Peak	46.79	20.83	67.62	105.48	-37.86
5973.00	Peak	32.98	21.16	54.14	68.20	-14.06

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5775MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

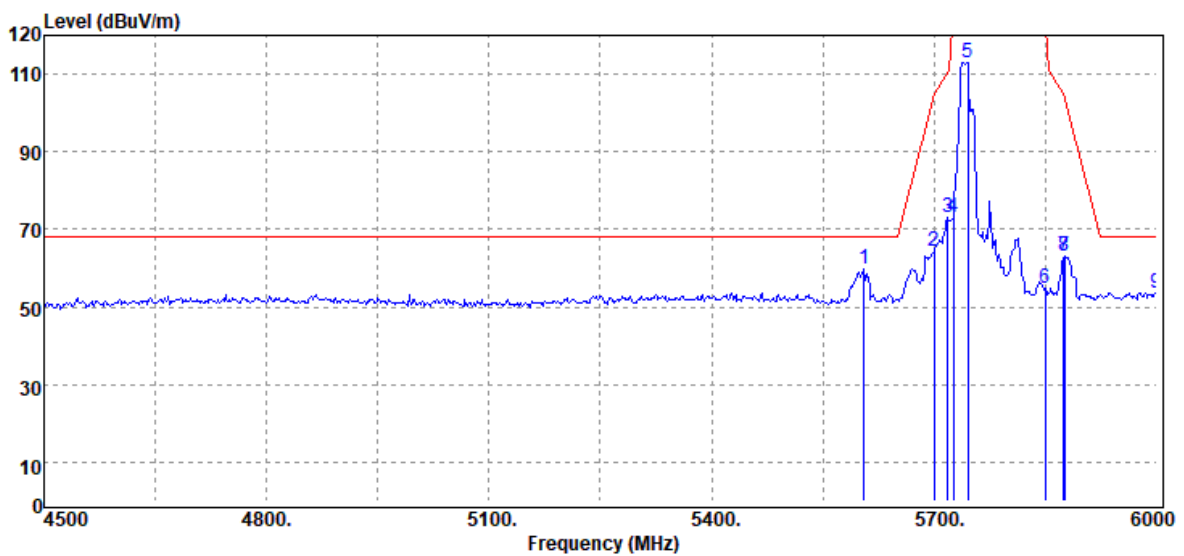

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5605.50	Peak	39.79	20.08	59.87	68.20	-8.33
5700.00	Peak	44.26	20.16	64.42	105.20	-40.78
5718.00	Peak	52.59	20.28	72.87	110.24	-37.37
5725.00	Peak	52.76	20.32	73.08	122.20	-49.12
5745.00	Peak	92.60	20.45	113.05	-	-
5850.00	Peak	33.92	20.73	54.65	122.20	-67.55
5875.00	Peak	42.09	20.84	62.93	105.20	-42.27
5875.50	Peak	42.08	20.85	62.93	104.83	-41.90
6000.00	Peak	32.54	21.17	53.71	68.20	-14.49

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5775MHz_106/53	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

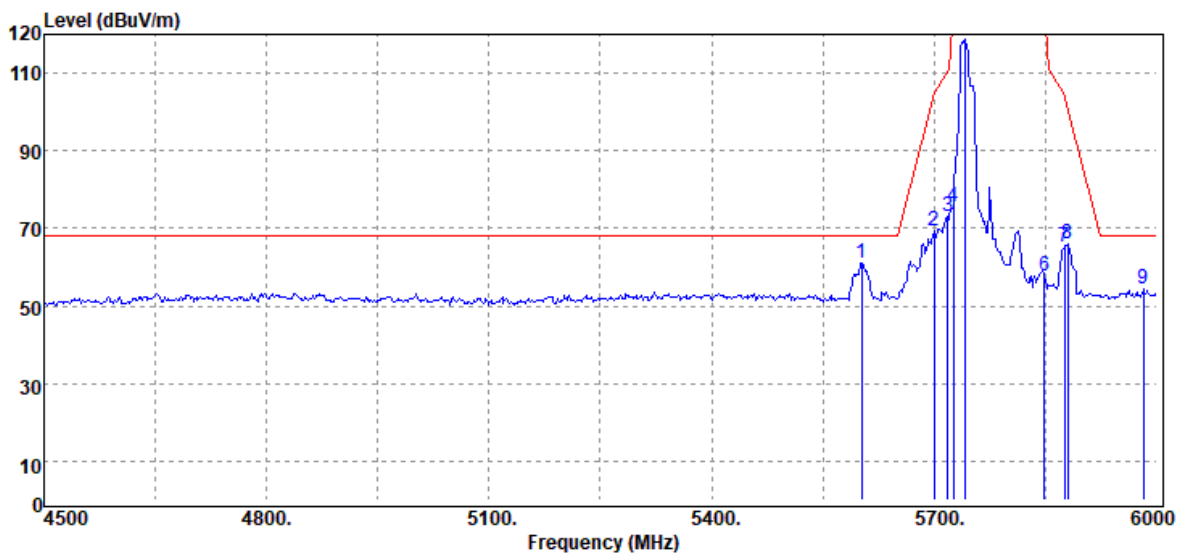

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5602.50	Peak	40.93	20.07	61.00	68.20	-7.20
5700.00	Peak	49.01	20.16	69.17	105.20	-36.03
5718.00	Peak	52.93	20.28	73.21	110.24	-37.03
5725.00	Peak	55.12	20.32	75.44	122.20	-46.76
5742.00	Peak	98.41	20.43	118.84	-	-
5850.00	Peak	36.86	20.73	57.59	122.20	-64.61
5875.50	Peak	44.39	20.85	65.24	104.83	-39.59
5880.00	Peak	45.04	20.86	65.90	101.50	-35.60
5982.00	Peak	33.14	21.17	54.31	68.20	-13.89

Report No.: T210319W02-RP2


Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

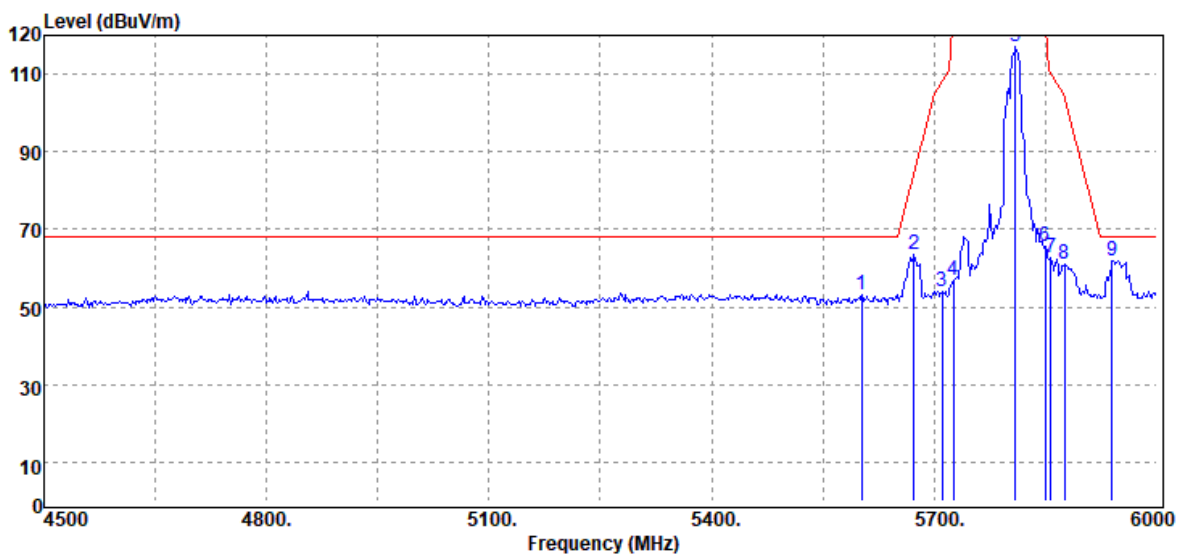

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5602.50	Peak	33.05	20.07	53.12	68.20	-15.08
5673.00	Peak	43.56	20.15	63.71	85.22	-21.51
5710.50	Peak	33.85	20.23	54.08	108.14	-54.06
5725.00	Peak	36.41	20.32	56.73	122.20	-65.47
5809.50	Peak	96.72	20.57	117.29	-	-
5850.00	Peak	44.92	20.73	65.65	122.20	-56.55
5857.50	Peak	41.90	20.76	62.66	110.10	-47.44
5875.50	Peak	40.32	20.85	61.17	104.83	-43.66
5940.00	Peak	40.78	21.12	61.90	68.20	-6.30

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	23.1(°C)/ 63%RH
Test Item	Band Edge	Test Date	November 17, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

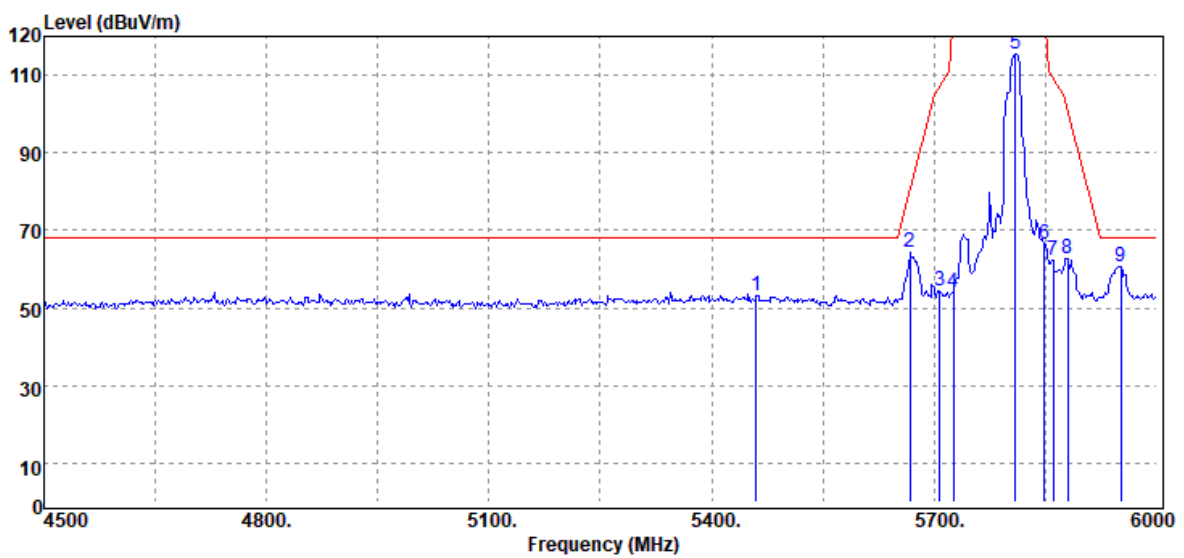


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	33.21	20.06	53.27	68.20	-14.93
5667.00	Peak	44.02	20.15	64.17	80.78	-16.61
5707.50	Peak	34.27	20.21	54.48	107.30	-52.82
5725.00	Peak	33.56	20.32	53.88	122.20	-68.32
5809.50	Peak	94.97	20.57	115.54	-	-
5850.00	Peak	45.78	20.73	66.51	122.20	-55.69
5860.50	Peak	41.71	20.77	62.48	109.26	-46.78
5880.00	Peak	42.04	20.86	62.90	101.50	-38.60
5952.00	Peak	39.63	21.16	60.79	68.20	-7.41

Report No.: T210319W02-RP2

Below 1G Test Data (Non-BeanForming Mode)

Test Mode	Mode 1	Temp/Hum	22.3(°C)/ 66%RH
Test Item	30MHz-1GHz	Test Date	December 17, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

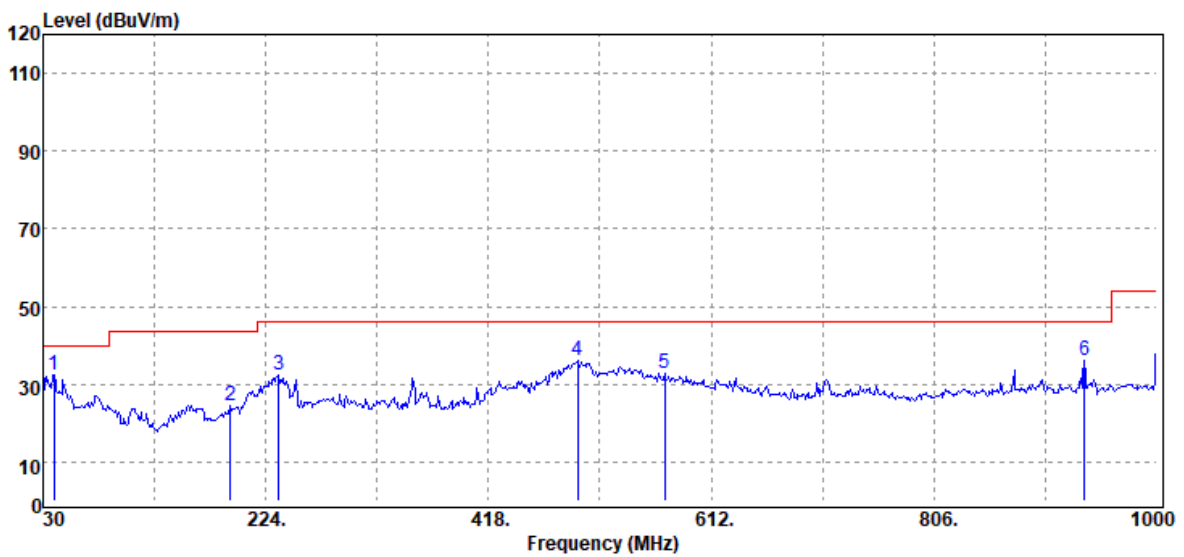


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
39.70	Peak	42.19	-9.65	32.54	40.00	-7.46
192.96	Peak	35.29	-10.61	24.68	43.50	-18.82
235.64	Peak	43.26	-10.94	32.32	46.00	-13.68
495.60	Peak	39.45	-3.29	36.16	46.00	-9.84
571.26	Peak	34.85	-2.04	32.81	46.00	-13.19
936.95	Peak	32.55	3.57	36.12	46.00	-9.88

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T210319W02-RP2

Test Mode	Mode 1	Temp/Hum	22.3(°C)/ 66%RH
Test Item	30MHz-1GHz	Test Date	December 17, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

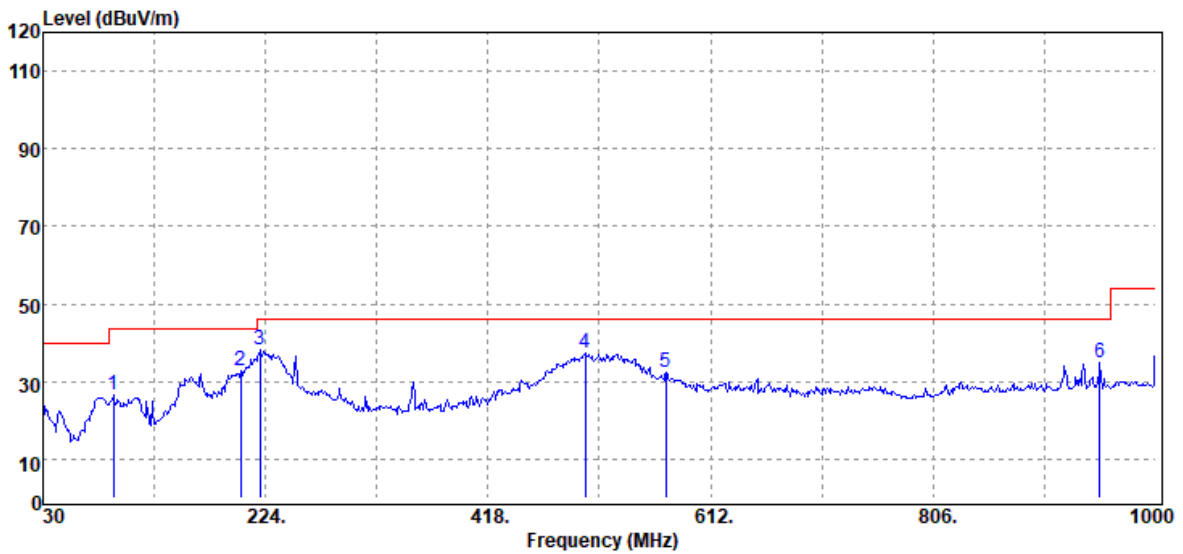

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
91.11	Peak	41.83	-15.43	26.40	43.50	-17.10
202.66	Peak	43.45	-10.67	32.78	43.50	-10.72
219.15	Peak	49.87	-11.76	38.11	46.00	-7.89
502.39	Peak	40.69	-3.28	37.41	46.00	-8.59
573.20	Peak	34.40	-2.02	32.38	46.00	-13.62
951.50	Peak	30.41	4.30	34.71	46.00	-11.29


Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T210319W02-RP2

Above 1G

Test Data for UNII-1 (Non-BeamForming Mode)

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	22.8(°C)/ 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

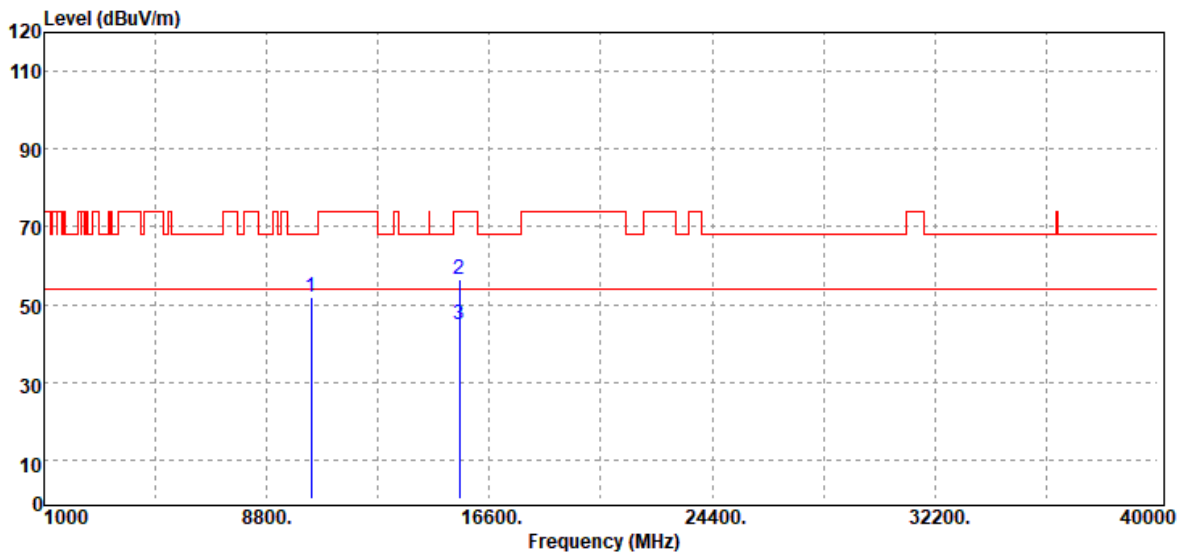


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	34.06	17.72	51.78	68.20	-16.42
15540.00	Peak	31.58	24.84	56.42	74.00	-17.58
15540.00	Average	19.88	24.84	44.72	54.00	-9.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

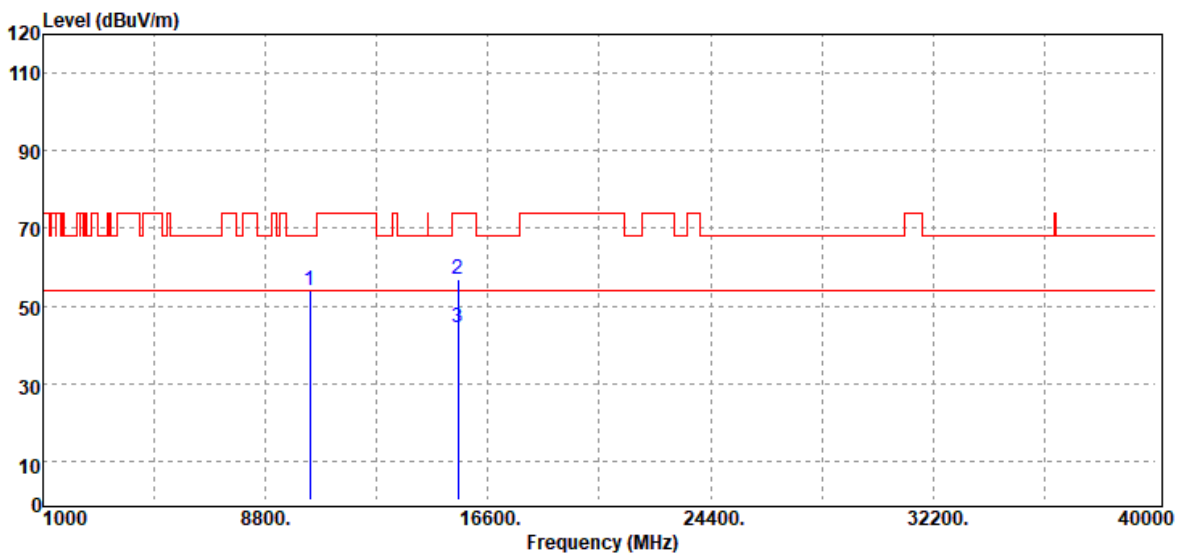


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	36.13	17.72	53.85	68.20	-14.35
15540.00	Peak	31.96	24.84	56.80	74.00	-17.20
15540.00	Average	19.68	24.84	44.52	54.00	-9.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonics	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

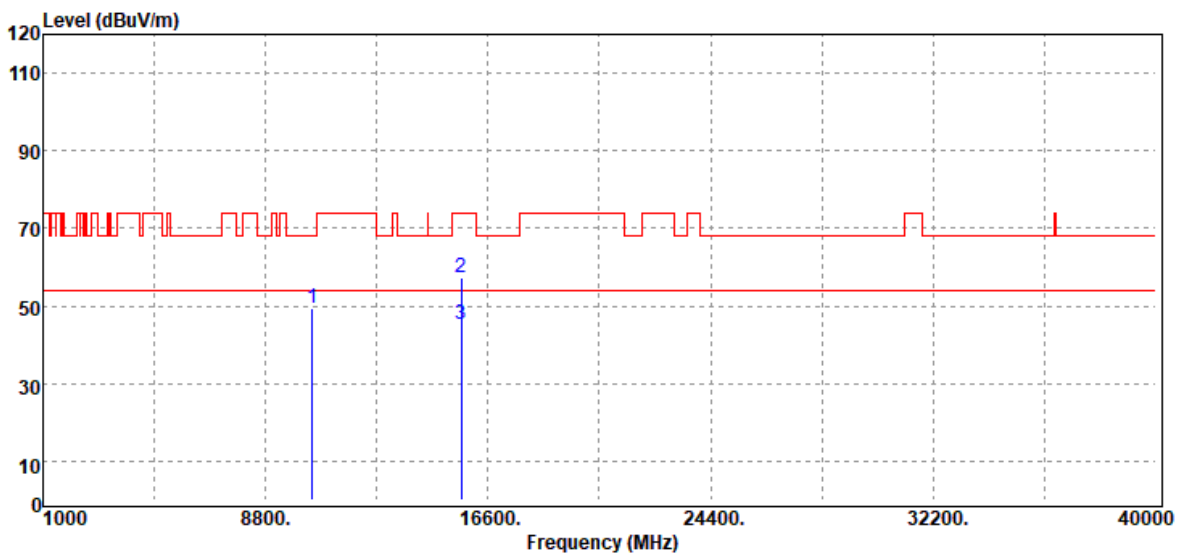


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	31.69	17.90	49.59	68.20	-18.61
15660.00	Peak	32.09	25.15	57.24	74.00	-16.76
15660.00	Average	19.97	25.15	45.12	54.00	-8.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

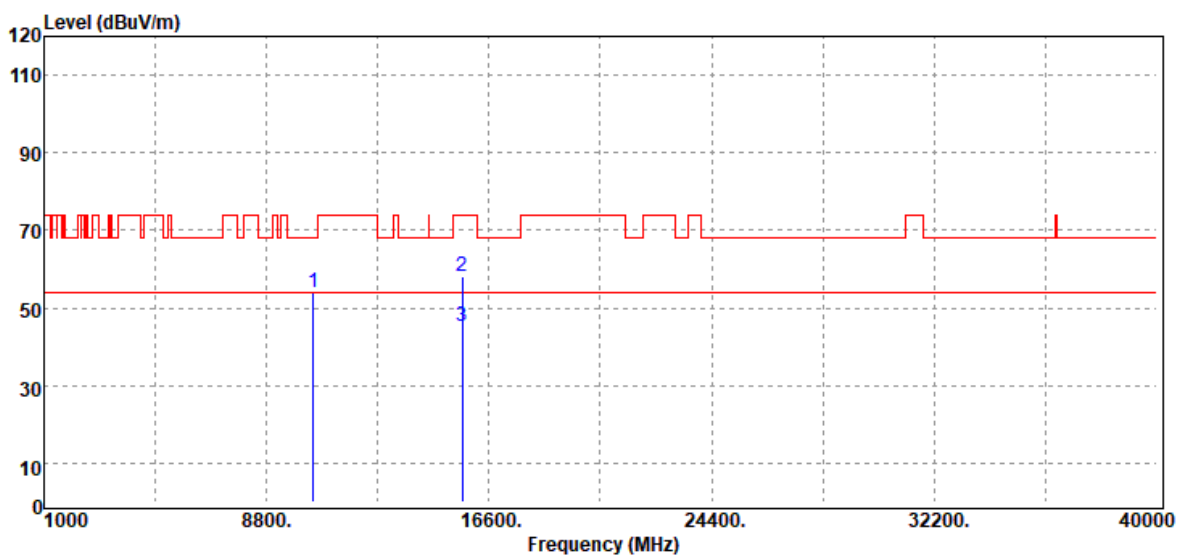


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	35.91	17.90	53.81	68.20	-14.39
15660.00	Peak	32.82	25.15	57.97	74.00	-16.03
15660.00	Average	19.92	25.15	45.07	54.00	-8.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

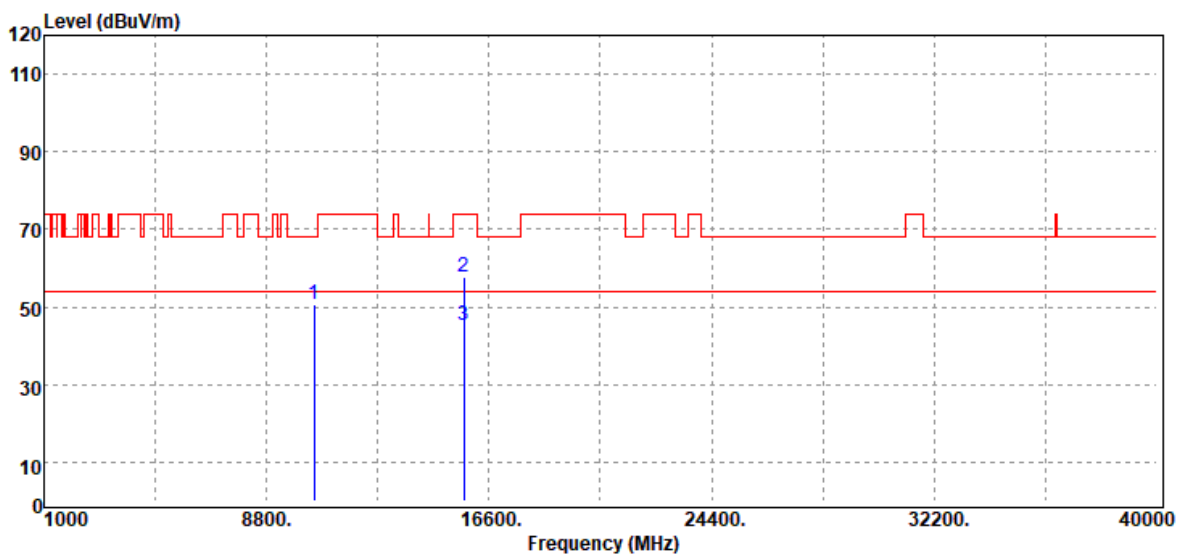


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	32.51	18.05	50.56	68.20	-17.64
15720.00	Peak	32.13	25.55	57.68	74.00	-16.32
15720.00	Average	19.69	25.55	45.24	54.00	-8.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

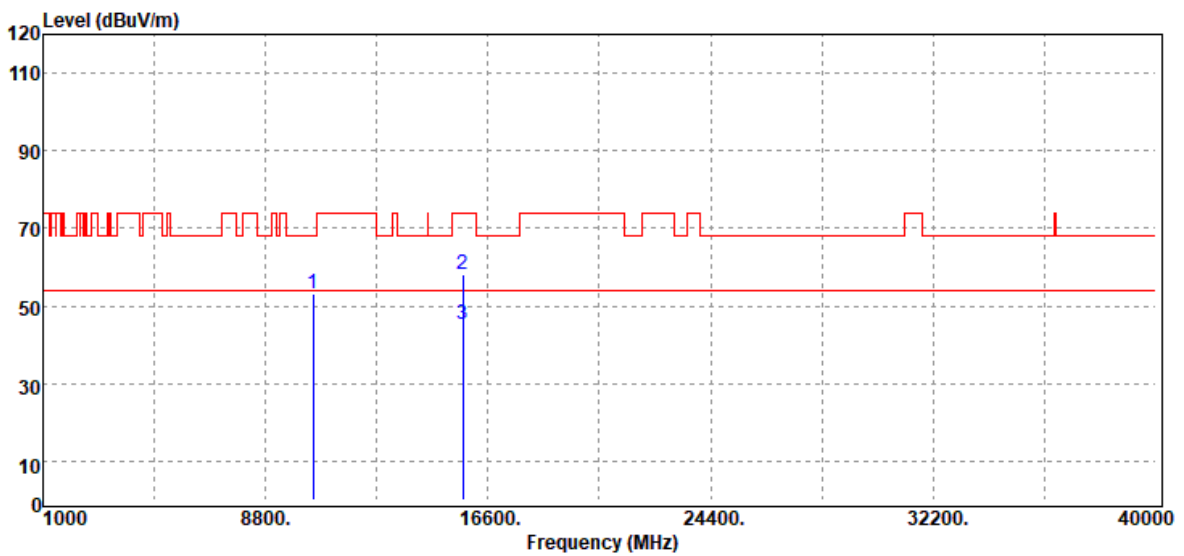


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	34.93	18.05	52.98	68.20	-15.22
15720.00	Peak	32.45	25.55	58.00	74.00	-16.00
15720.00	Average	19.72	25.55	45.27	54.00	-8.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5180MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

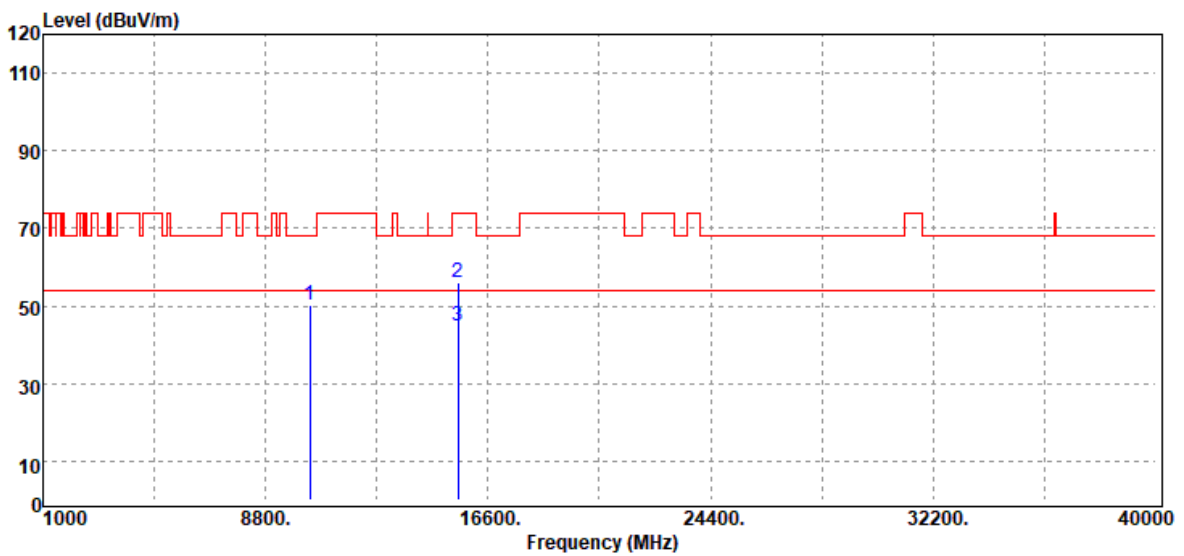


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	32.39	17.72	50.11	68.20	-18.09
15540.00	Peak	31.29	24.84	56.13	74.00	-17.87
15540.00	Average	20.09	24.84	44.93	54.00	-9.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5180MHz	Temp/Hum	22.8(°C)/ 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

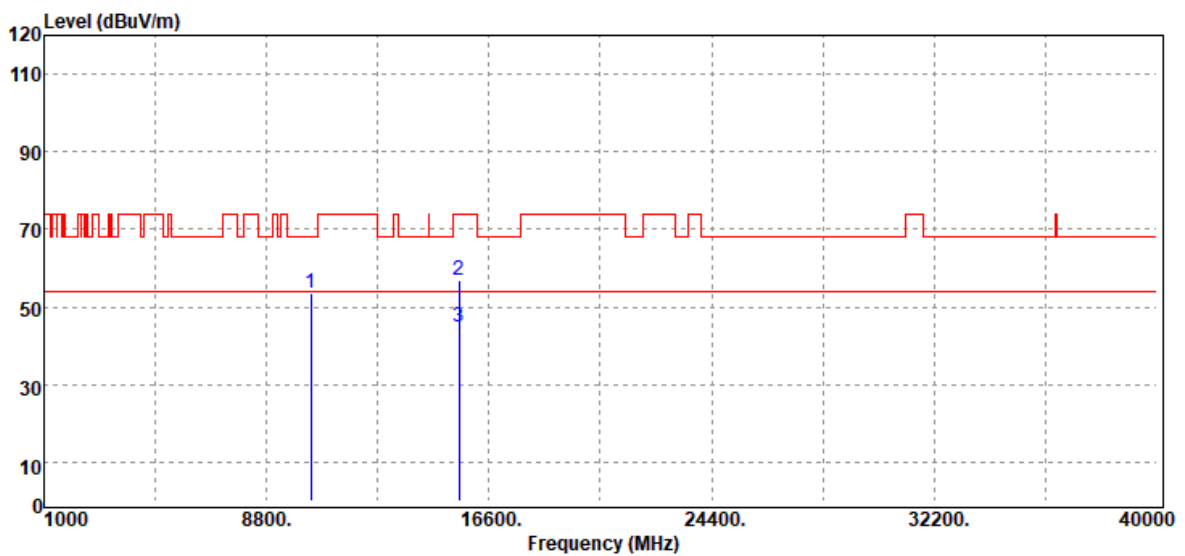


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	35.81	17.72	53.53	68.20	-14.67
15540.00	Peak	32.25	24.84	57.09	74.00	-16.91
15540.00	Average	20.08	24.84	44.92	54.00	-9.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5220MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

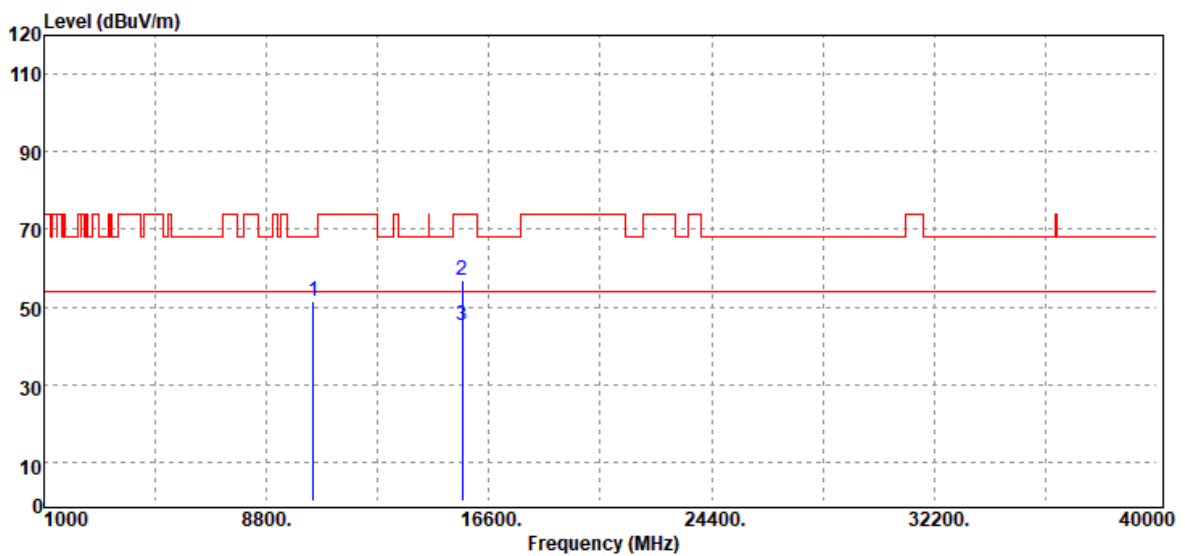

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	33.61	17.90	51.51	68.20	-16.69
15660.00	Peak	31.88	25.15	57.03	74.00	-16.97
15660.00	Average	20.14	25.15	45.29	54.00	-8.71
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5220MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	34.82	17.90	52.72	68.20	-15.48
15660.00	Peak	32.15	25.15	57.30	74.00	-16.70
15660.00	Average	19.98	25.15	45.13	54.00	-8.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5240MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	32.52	18.05	50.57	68.20	-17.63
15720.00	Peak	31.57	25.55	57.12	74.00	-16.88
15720.00	Average	19.87	25.55	45.42	54.00	-8.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5240MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

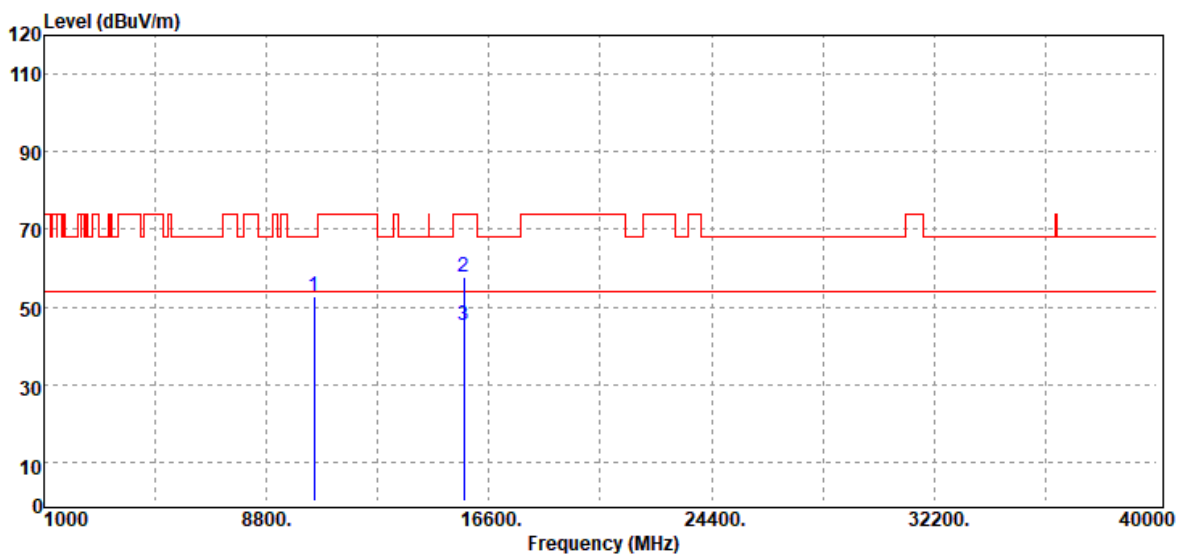


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	34.56	18.05	52.61	68.20	-15.59
15720.00	Peak	32.36	25.55	57.91	74.00	-16.09
15720.00	Average	19.87	25.55	45.42	54.00	-8.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5190MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

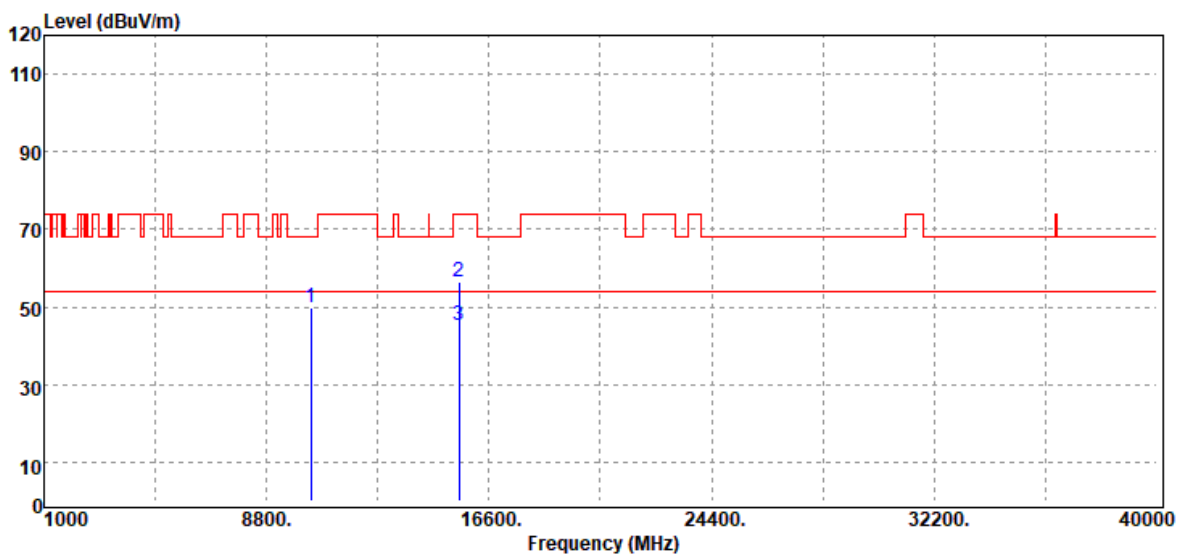

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	32.26	17.72	49.98	68.20	-18.22
15540.00	Peak	31.63	24.84	56.47	74.00	-17.53
15540.00	Average	20.26	24.84	45.10	54.00	-8.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	31.33	17.72	49.05	68.20	-19.15
15540.00	Peak	31.24	24.84	56.08	74.00	-17.92
15540.00	Average	20.31	24.84	45.15	54.00	-8.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5230MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

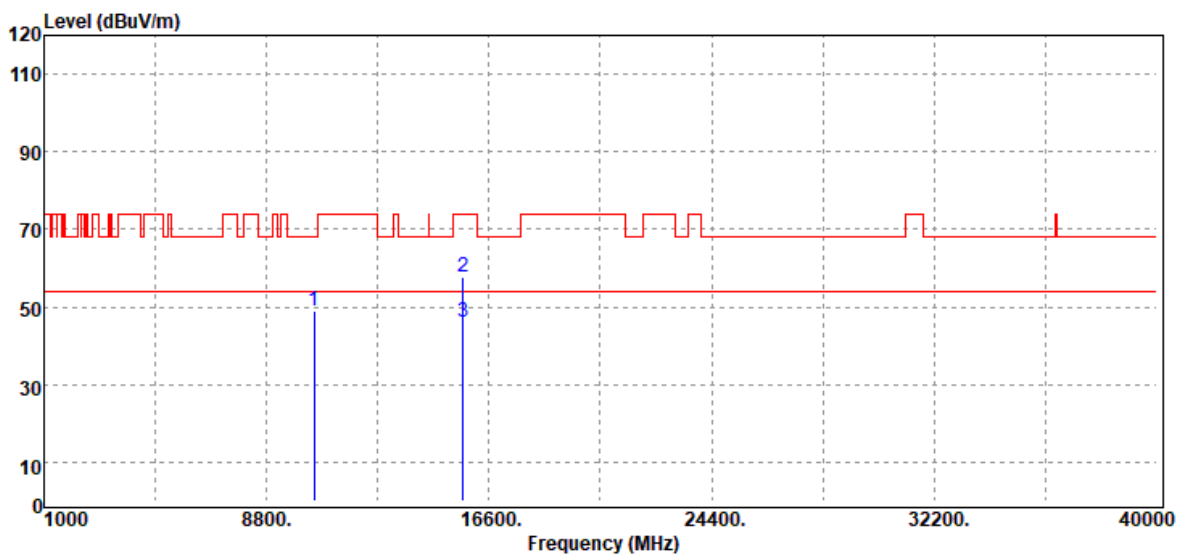


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10460.00	Peak	30.95	17.97	48.92	68.20	-19.28
15690.00	Peak	32.31	25.38	57.69	74.00	-16.31
15690.00	Average	20.51	25.38	45.89	54.00	-8.11
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5230MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

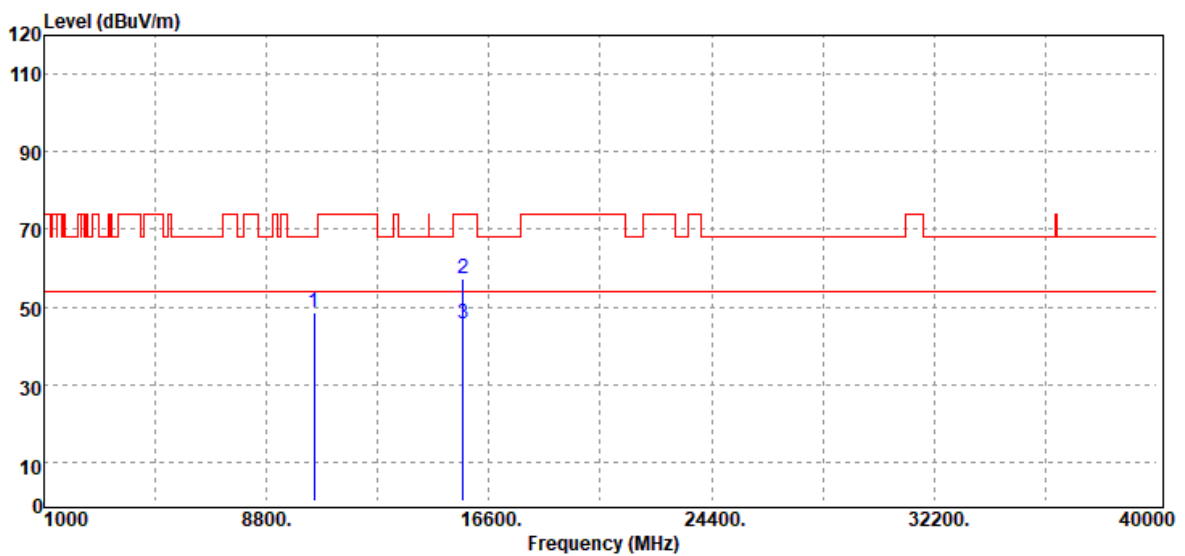


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	30.46	17.97	48.43	68.20	-19.77
15690.00	Peak	31.75	25.38	57.13	74.00	-16.87
15690.00	Average	20.30	25.38	45.68	54.00	-8.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

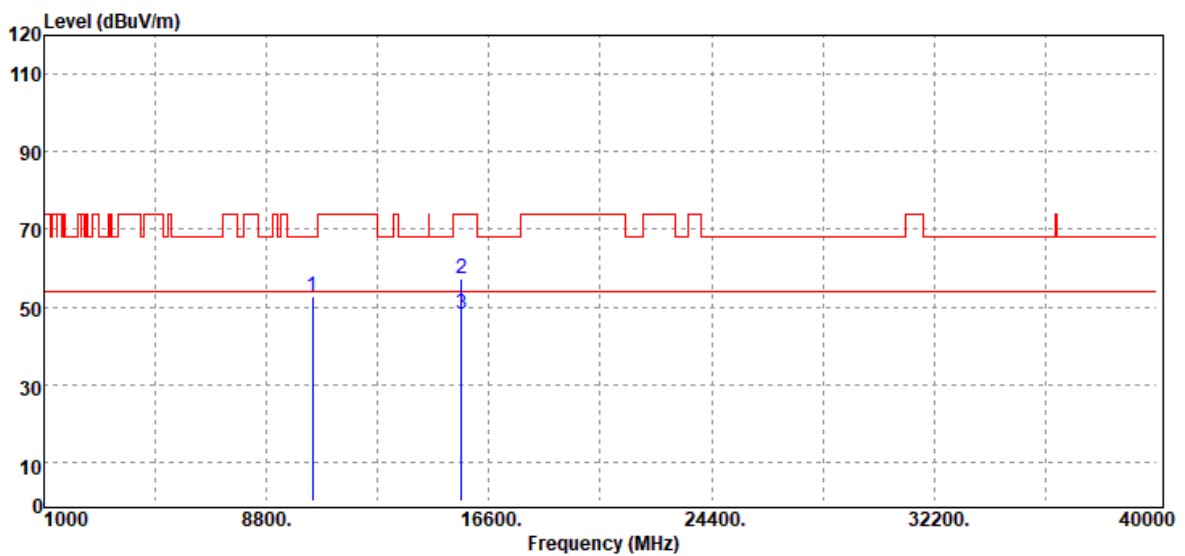


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	34.85	17.86	52.71	68.20	-15.49
15630.00	Peak	32.19	25.00	57.19	74.00	-16.81
15630.00	Average	23.20	25.00	48.20	54.00	-5.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

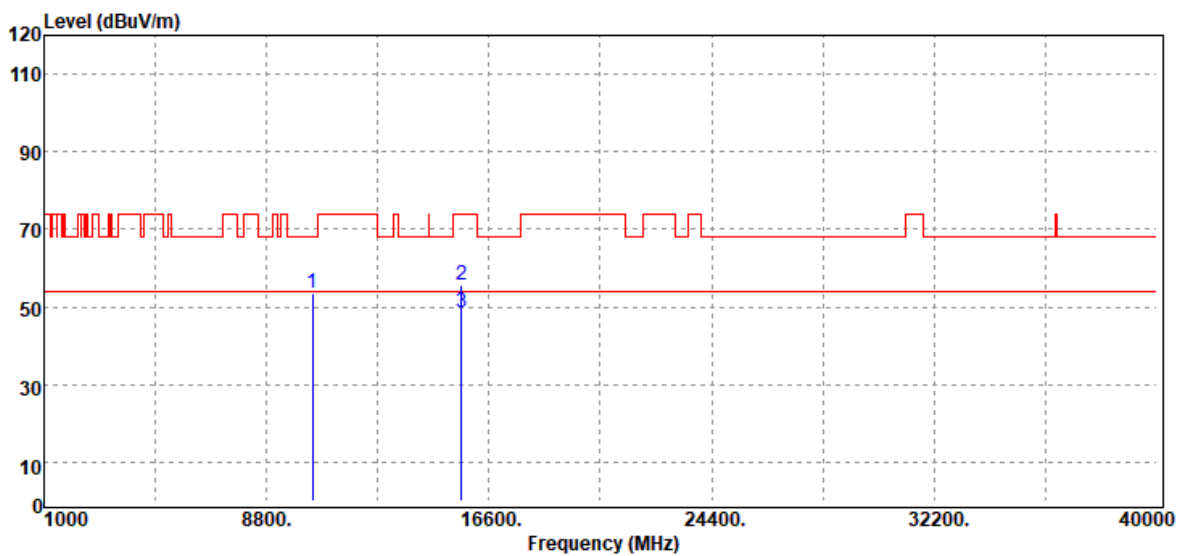


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	35.70	17.86	53.56	68.20	-14.64
15630.00	Peak	30.58	25.00	55.58	74.00	-18.42
15630.00	Average	23.47	25.00	48.47	54.00	-5.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

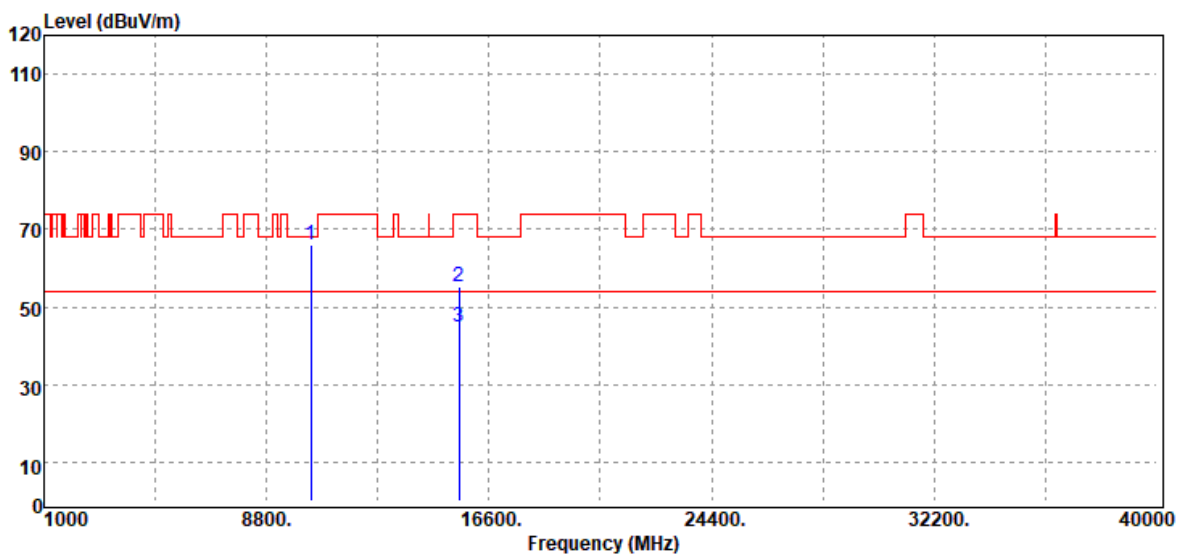


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10343.20	Peak	48.25	17.70	65.95	68.20	-2.25
15540.00	Peak	30.35	24.84	55.19	74.00	-18.81
15540.00	Average	20.13	24.84	44.97	54.00	-9.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

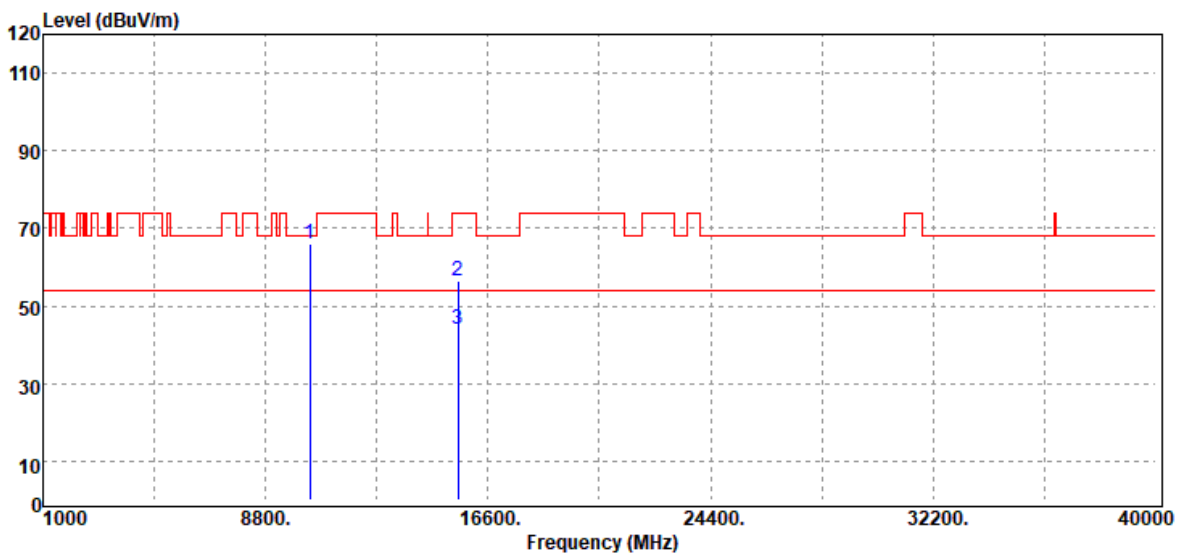


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10343.20	Peak	48.32	17.70	66.02	68.20	-2.18
15540.00	Peak	31.48	24.84	56.32	74.00	-17.68
15540.00	Average	19.17	24.84	44.01	54.00	-9.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

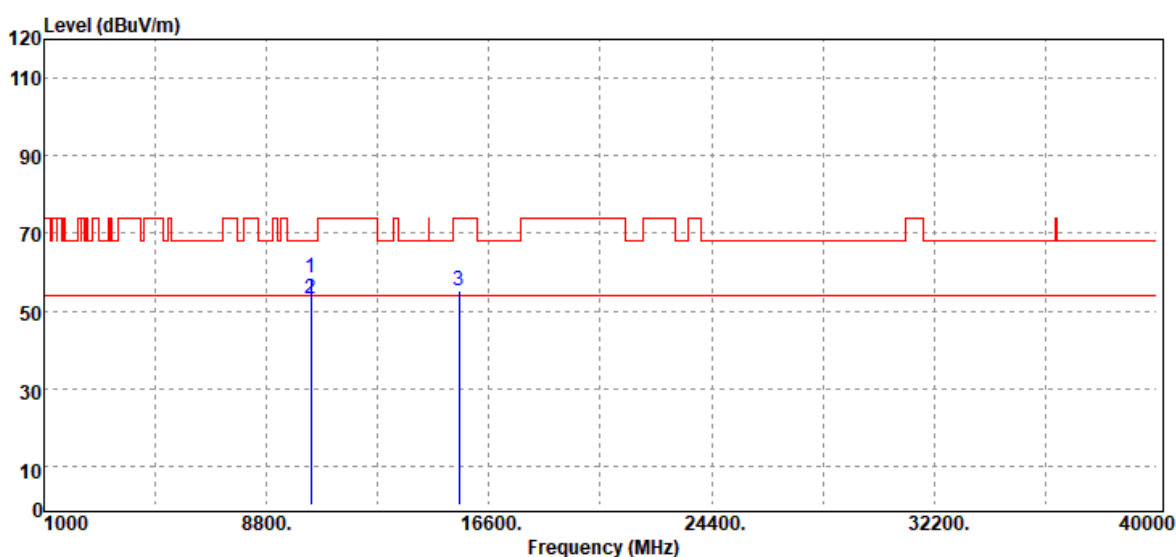


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10343.20	Peak	40.70	17.70	58.40	68.20	-9.80
10343.20	Average	35.27	17.70	52.97	54.00	-1.03
15540.00	Peak	30.36	24.84	55.20	74.00	-18.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

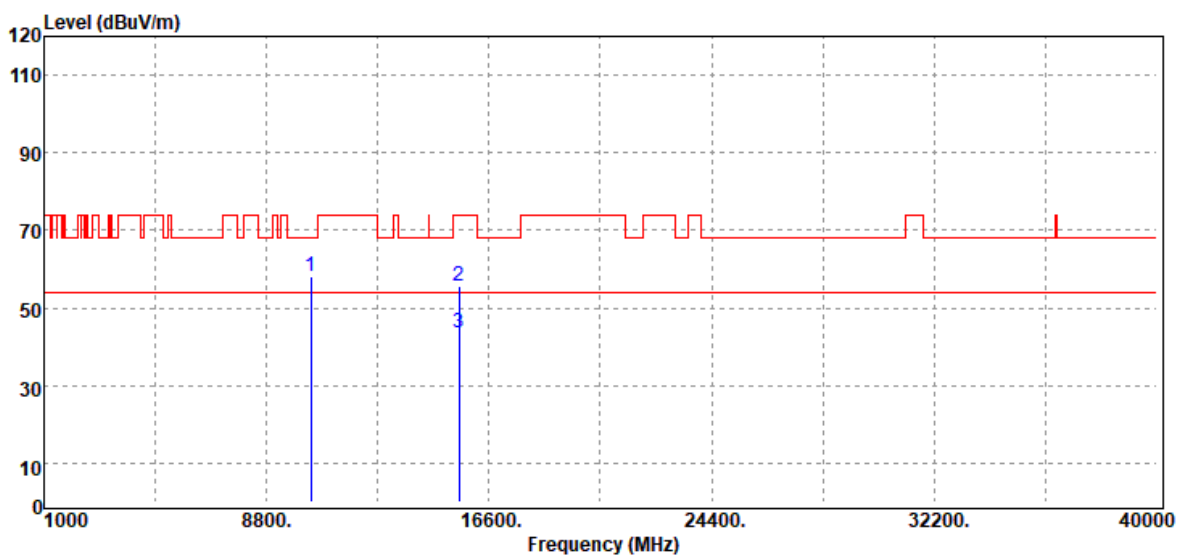


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10343.20	Peak	40.27	17.70	57.97	68.20	-10.23
15540.00	Peak	30.60	24.84	55.44	74.00	-18.56
15540.00	Average	18.89	24.84	43.73	54.00	-10.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

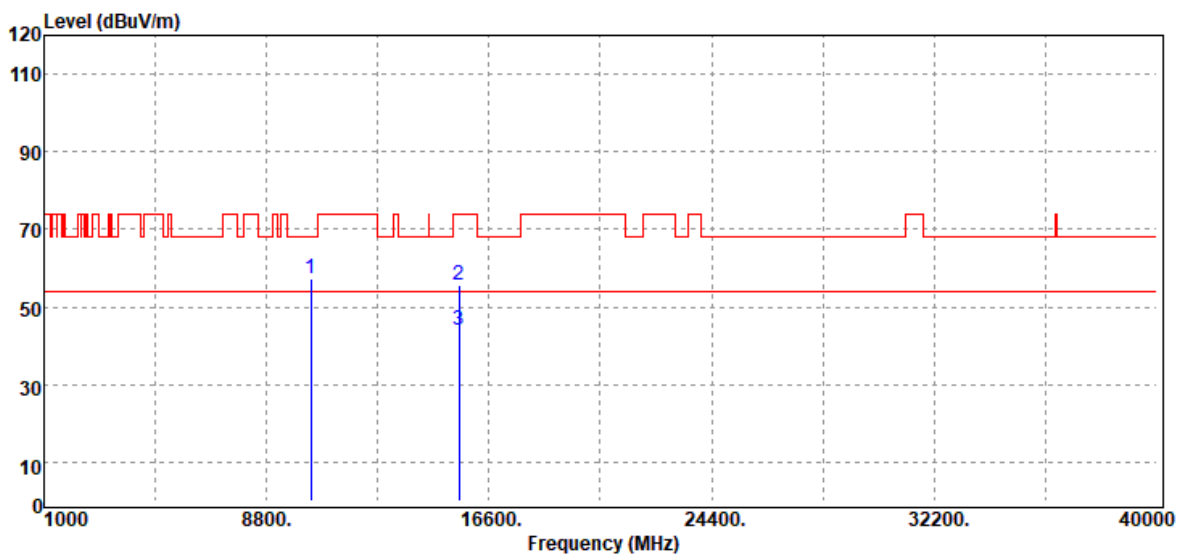

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10343.20	Peak	39.57	17.70	57.27	68.20	-10.93
15540.00	Peak	30.79	24.84	55.63	74.00	-18.37
15540.00	Average	19.28	24.84	44.12	54.00	-9.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10343.20	Peak	39.53	17.70	57.23	68.20	-10.97
15540.00	Peak	31.93	24.84	56.77	74.00	-17.23
15540.00	Average	18.96	24.84	43.80	54.00	-10.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5220MHz_106/53	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

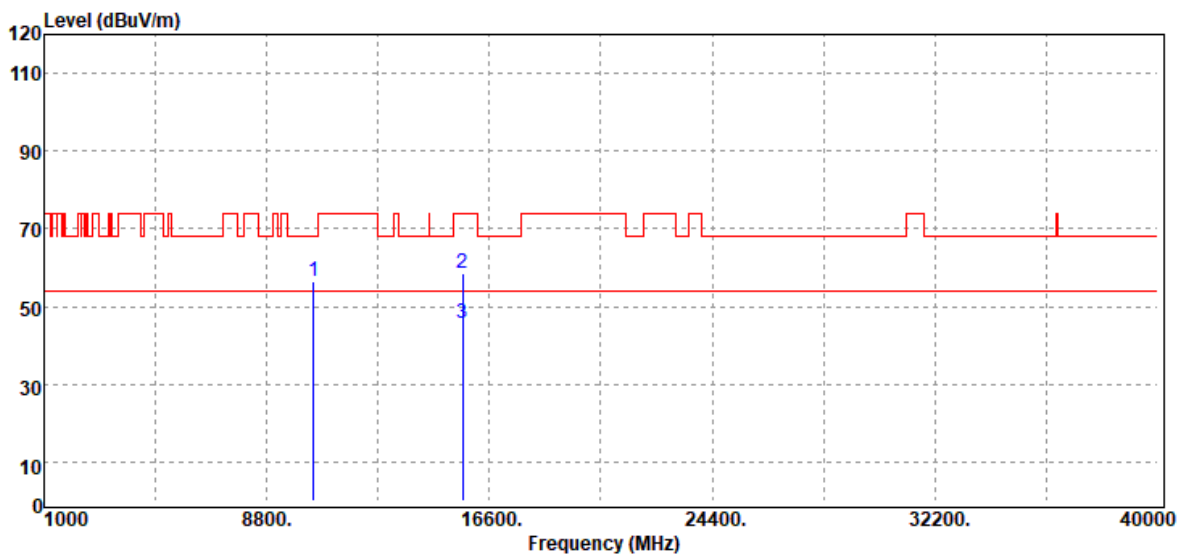


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	38.46	17.90	56.36	68.20	-11.84
15660.00	Peak	33.25	25.15	58.40	74.00	-15.60
15660.00	Average	20.59	25.15	45.74	54.00	-8.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5220MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

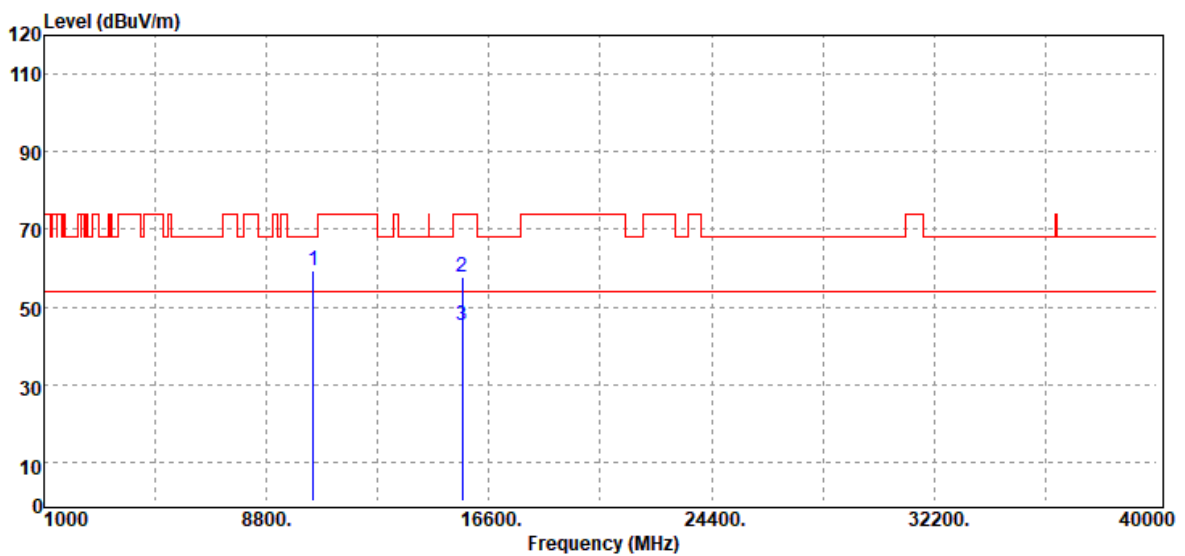


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10440.00	Peak	41.36	17.90	59.26	68.20	-8.94
15660.00	Peak	32.54	25.15	57.69	74.00	-16.31
15660.00	Average	20.13	25.15	45.28	54.00	-8.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5240MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

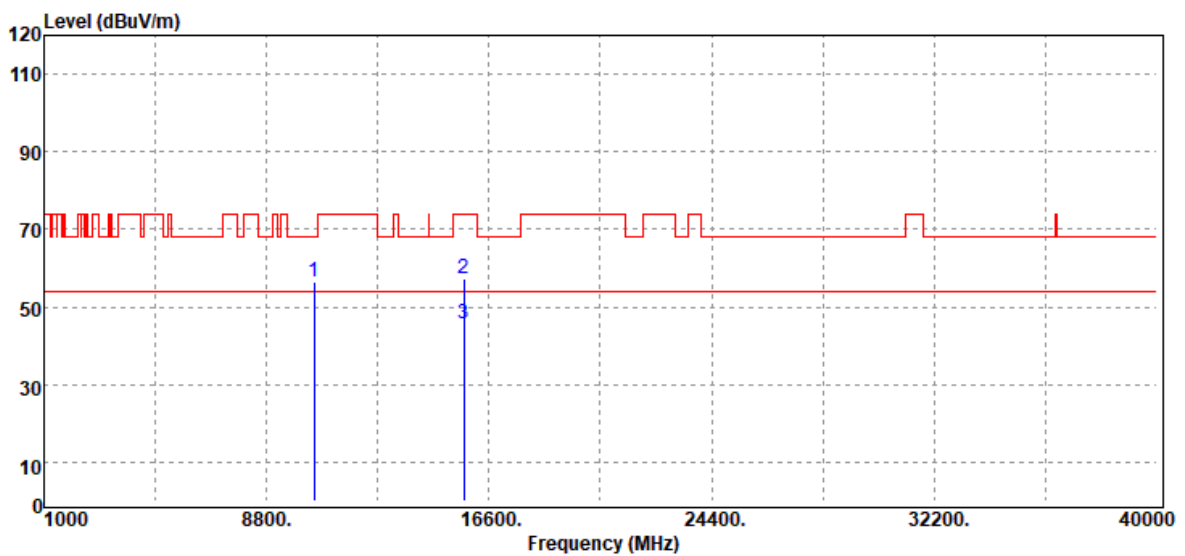


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Marginal (dB)
10480.00	Peak	38.42	18.05	56.47	68.20	-11.73
15720.00	Peak	31.62	25.55	57.17	74.00	-16.83
15720.00	Average	20.08	25.55	45.63	54.00	-8.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5240MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

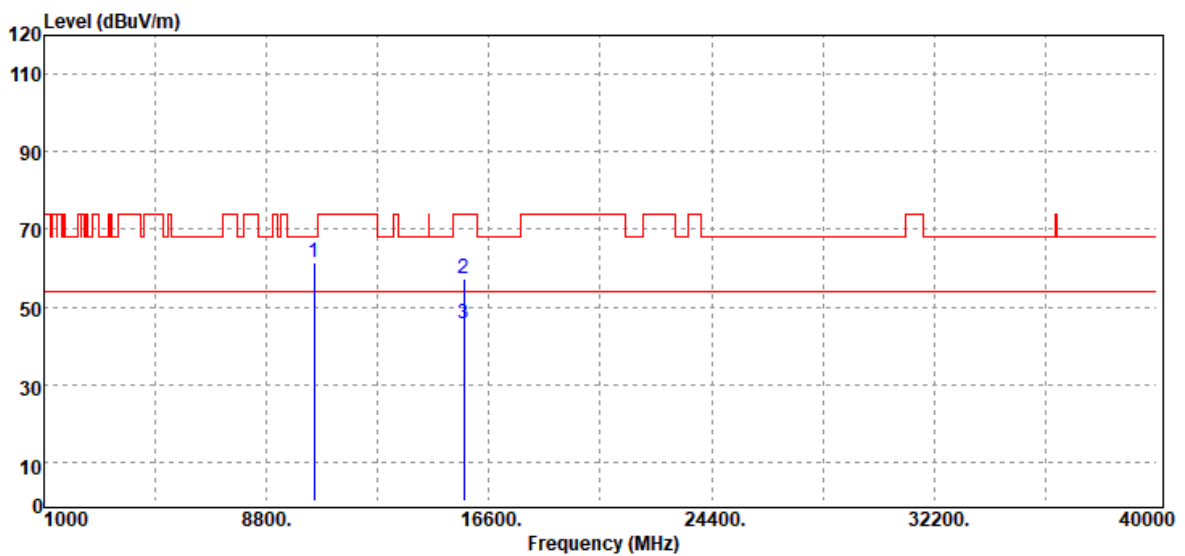


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	43.55	18.05	61.60	68.20	-6.60
15720.00	Peak	31.73	25.55	57.28	74.00	-16.72
15720.00	Average	19.92	25.55	45.47	54.00	-8.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5190MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

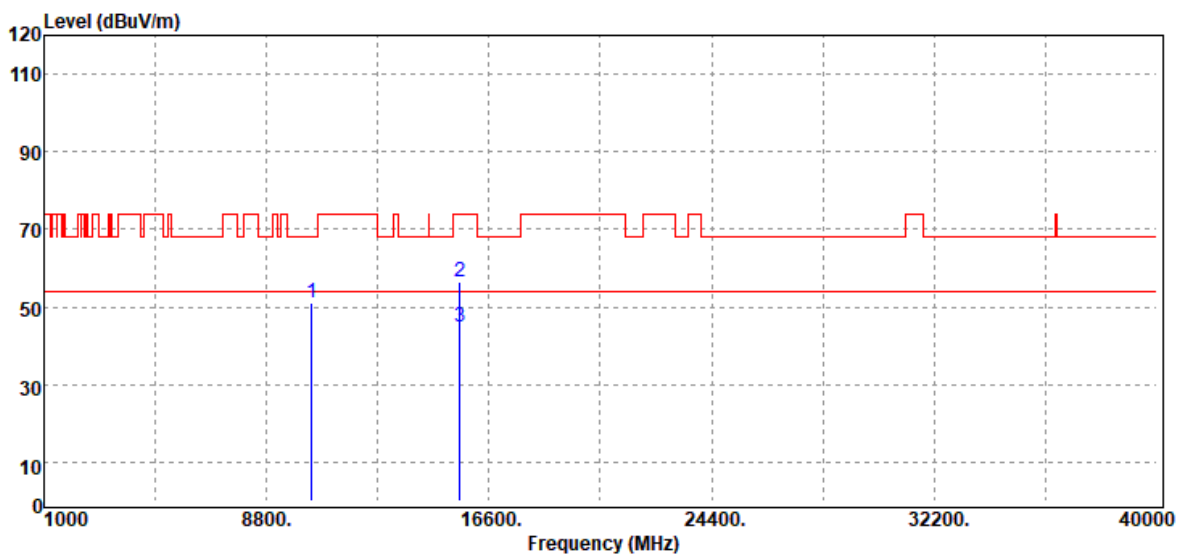


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	33.16	17.76	50.92	68.20	-17.28
15570.00	Peak	31.45	24.86	56.31	74.00	-17.69
15570.00	Average	20.03	24.86	44.89	54.00	-9.11
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5190MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

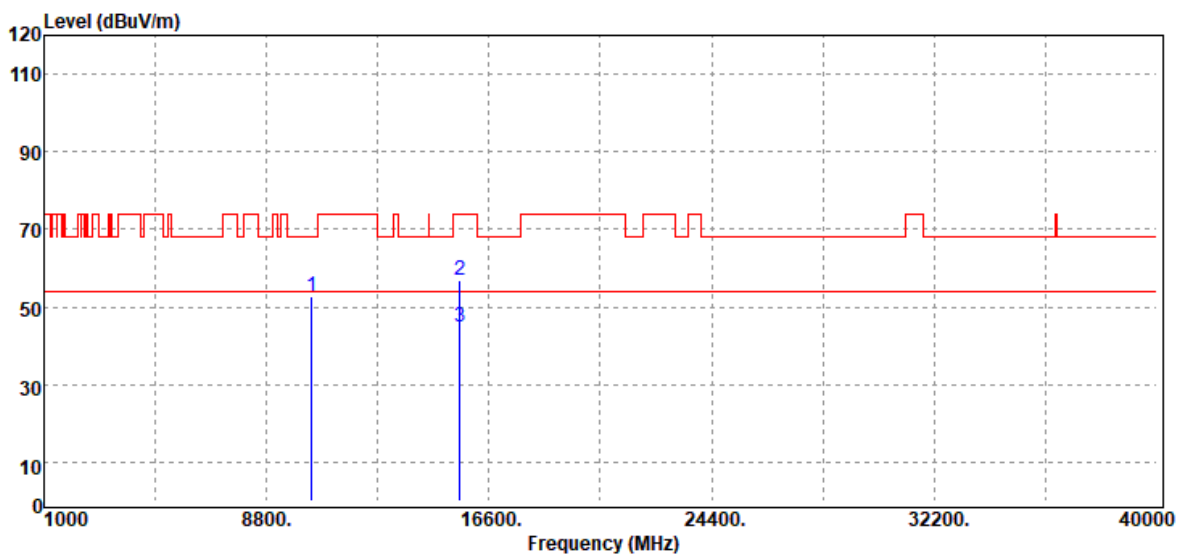

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10380.00	Peak	35.01	17.76	52.77	68.20	-15.43
15570.00	Peak	32.17	24.86	57.03	74.00	-16.97
15570.00	Average	19.95	24.86	44.81	54.00	-9.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5230MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10460.00	Peak	33.37	17.97	51.34	68.20	-16.86
15690.00	Peak	31.76	25.38	57.14	74.00	-16.86
15690.00	Average	19.78	25.38	45.16	54.00	-8.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5230MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

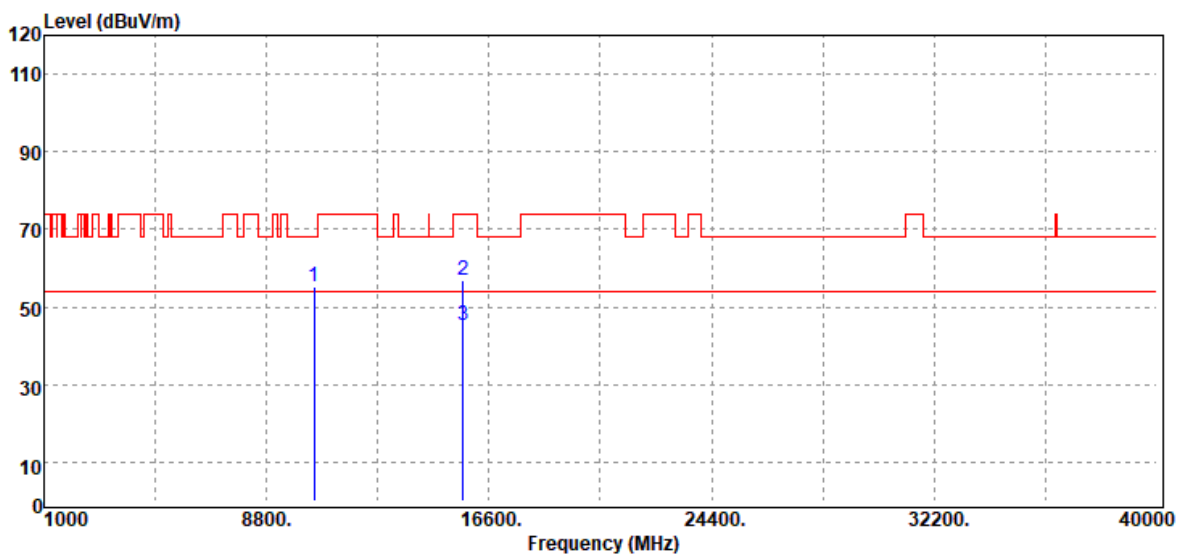


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	37.37	17.97	55.34	68.20	-12.86
15690.00	Peak	31.57	25.38	56.95	74.00	-17.05
15690.00	Average	19.89	25.38	45.27	54.00	-8.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5210MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

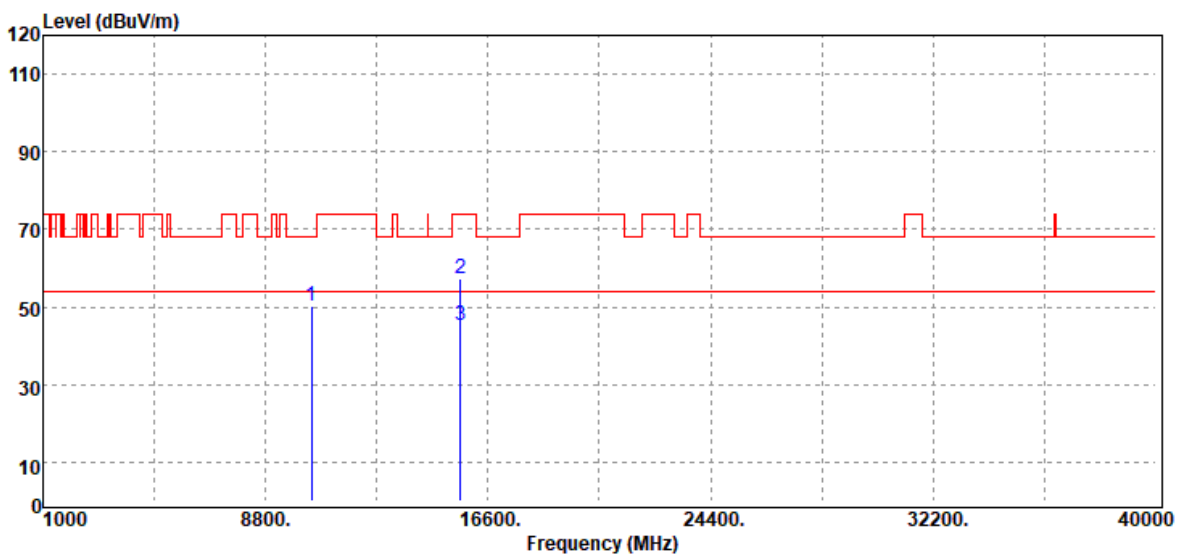


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	32.44	17.86	50.30	68.20	-17.90
15630.00	Peak	32.19	25.00	57.19	74.00	-16.81
15630.00	Average	20.26	25.00	45.26	54.00	-8.74
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5210MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

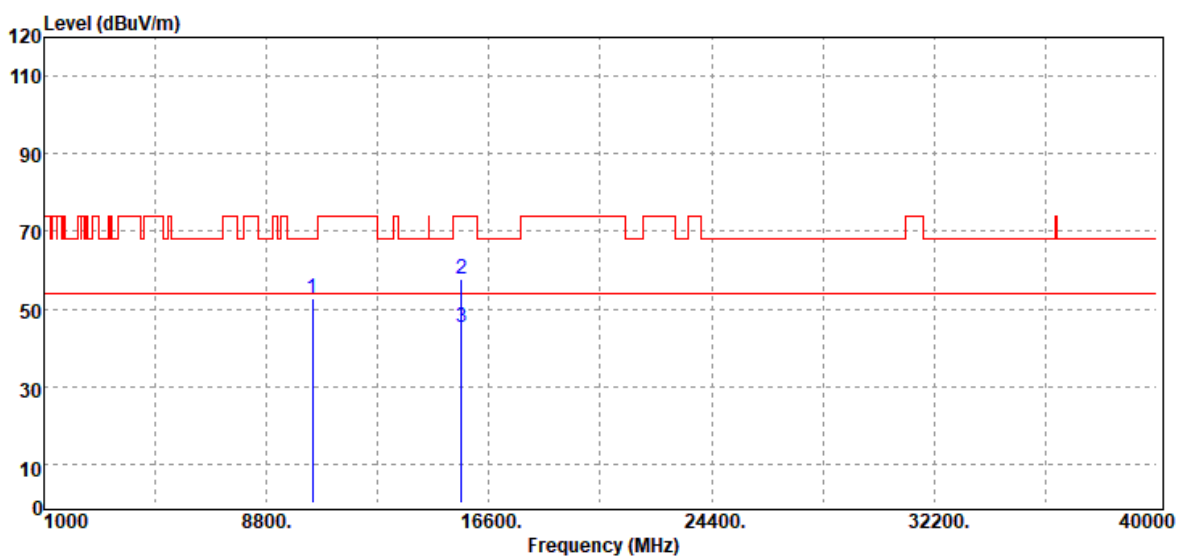

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	34.70	17.86	52.56	68.20	-15.64
15630.00	Peak	32.85	25.00	57.85	74.00	-16.15
15630.00	Average	20.21	25.00	45.21	54.00	-8.79
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Data for UNII-2a (Non-BeamForming Mode)

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	22.8(°C)/ 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

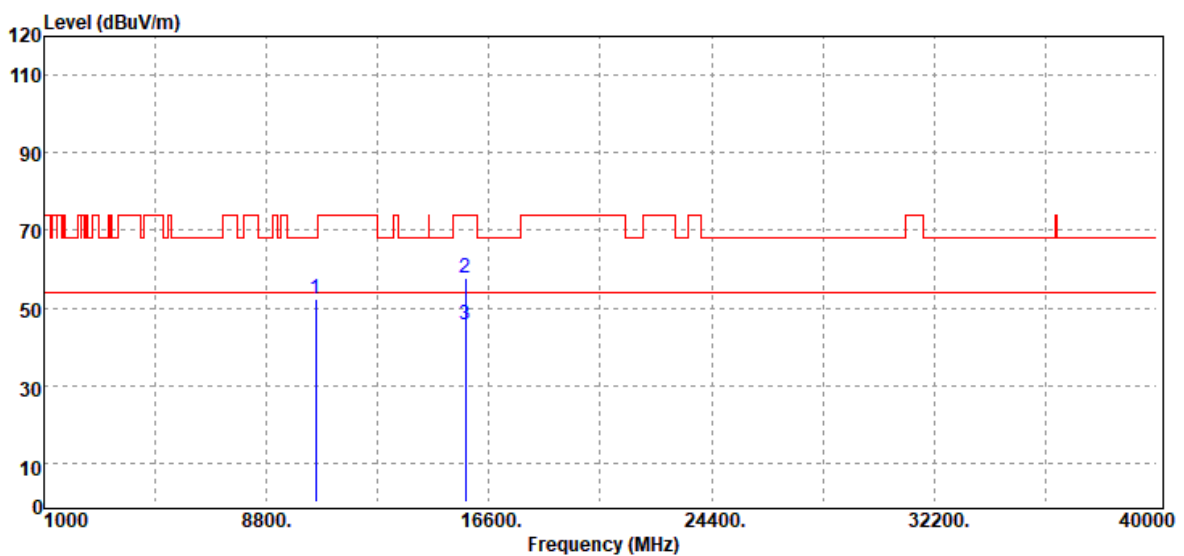


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10520.00	Peak	34.12	18.16	52.28	68.20	-15.92
15780.00	Peak	31.92	25.81	57.73	74.00	-16.27
15780.00	Average	19.68	25.81	45.49	54.00	-8.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

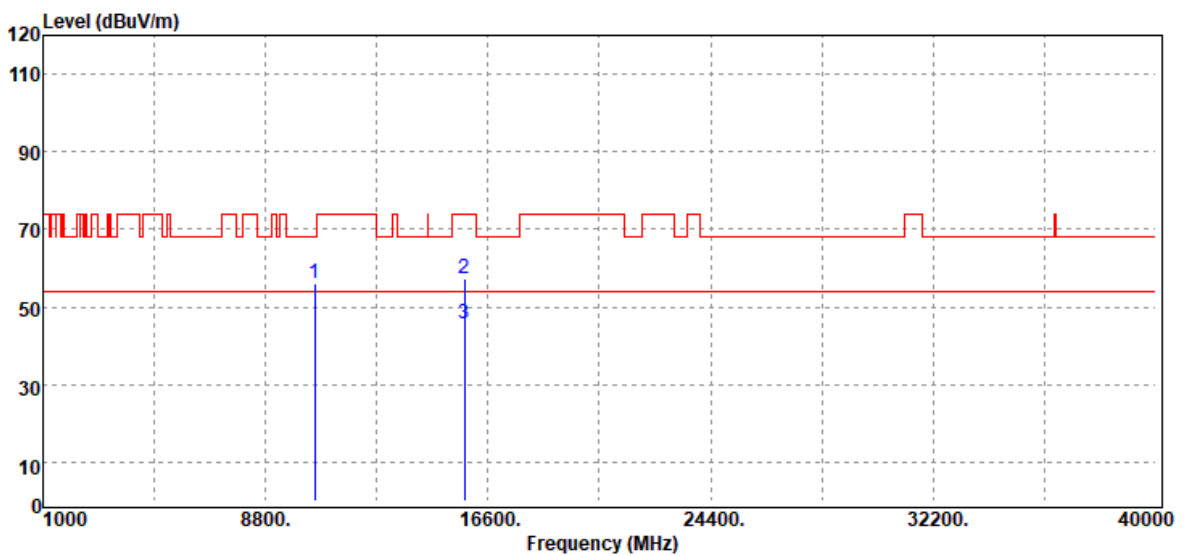

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	37.75	18.16	55.91	68.20	-12.29
15780.00	Peak	31.63	25.81	57.44	74.00	-16.56
15780.00	Average	19.77	25.81	45.58	54.00	-8.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonics	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	32.11	18.20	50.31	68.20	-17.89
15900.00	Peak	32.76	26.46	59.22	74.00	-14.78
15900.00	Average	20.00	26.46	46.46	54.00	-7.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

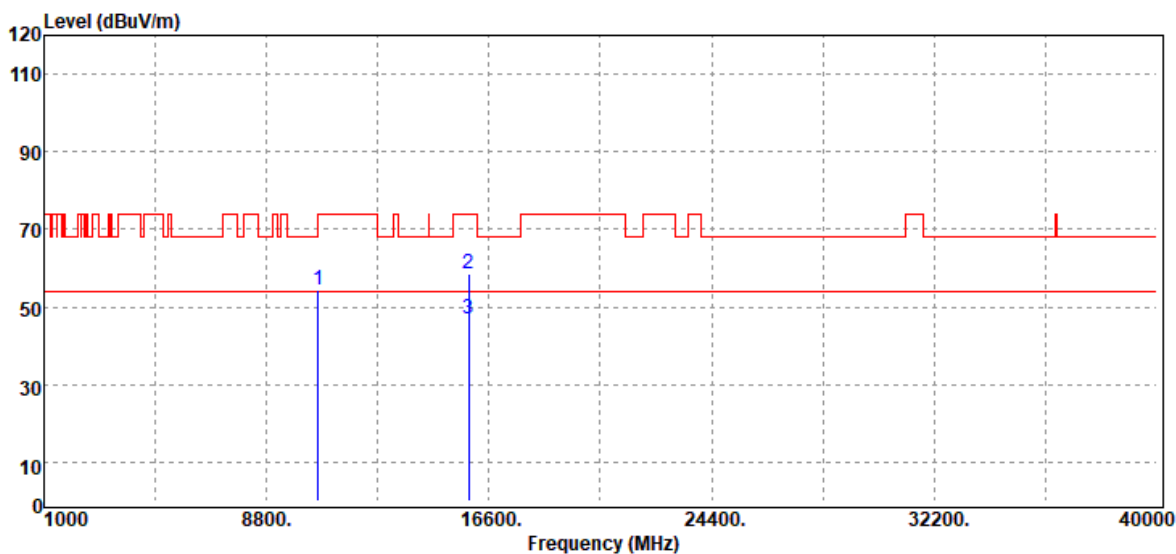


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	36.36	18.20	54.56	68.20	-13.64
15900.00	Peak	31.96	26.46	58.42	74.00	-15.58
15900.00	Average	20.32	26.46	46.78	54.00	-7.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

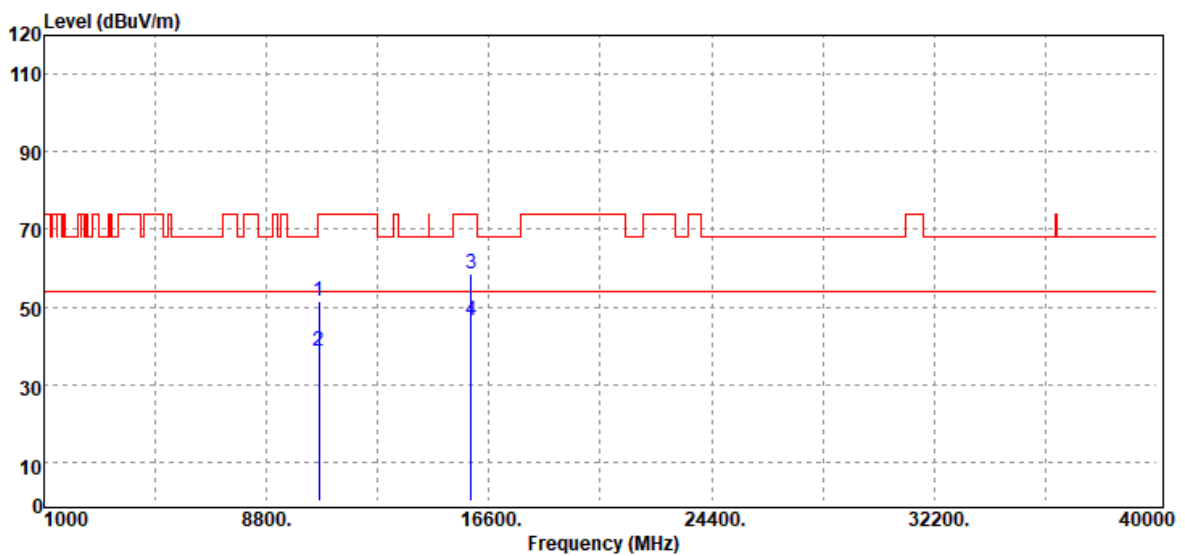


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	32.99	18.36	51.35	74.00	-22.65
10640.00	Average	20.19	18.36	38.55	54.00	-15.45
15960.00	Peak	31.63	26.84	58.47	74.00	-15.53
15960.00	Average	19.78	26.84	46.62	54.00	-7.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

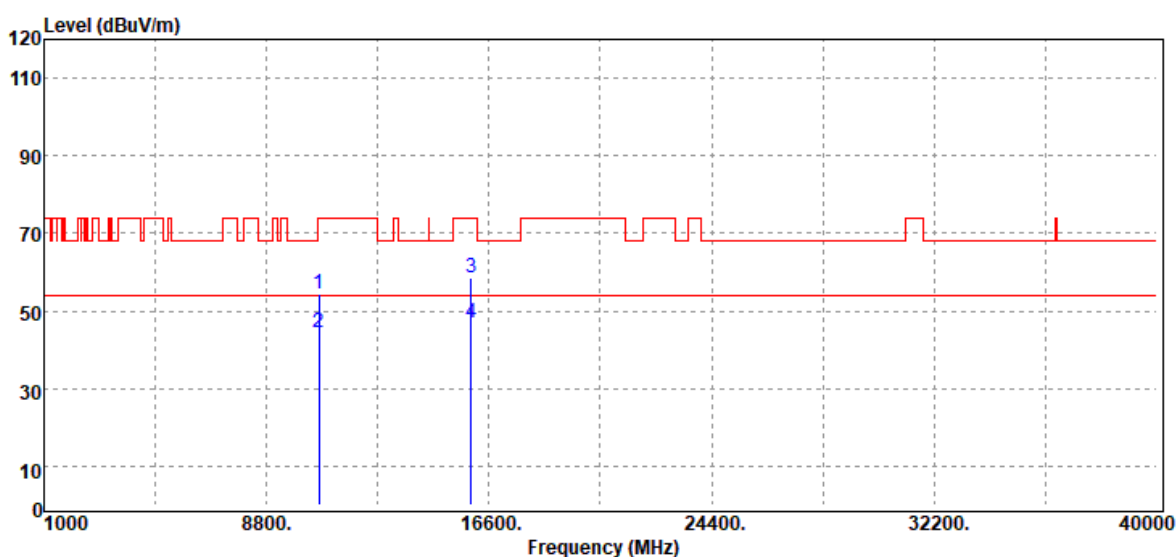


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	36.15	18.36	54.51	74.00	-19.49
10640.00	Average	25.90	18.36	44.26	54.00	-9.74
15960.00	Peak	31.70	26.84	58.54	74.00	-15.46
15960.00	Average	20.01	26.84	46.85	54.00	-7.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5260 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

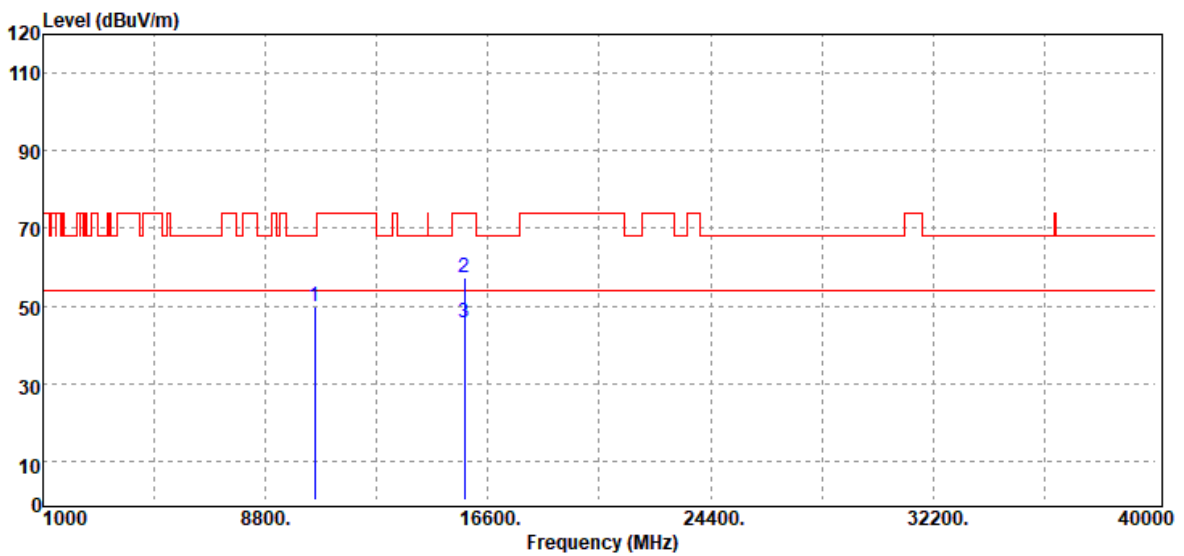


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	31.57	18.16	49.73	68.20	-18.47
15780.00	Peak	31.58	25.81	57.39	74.00	-16.61
15780.00	Average	19.99	25.81	45.80	54.00	-8.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5260 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

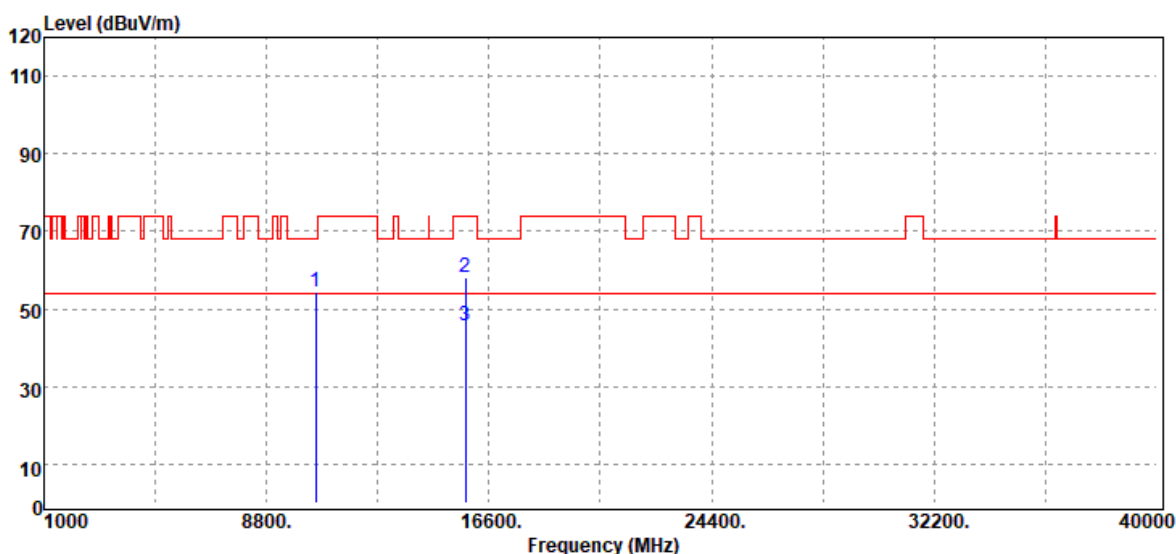

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10520.00	Peak	36.11	18.16	54.27	68.20	-13.93
15780.00	Peak	32.17	25.81	57.98	74.00	-16.02
15780.00	Average	20.04	25.81	45.85	54.00	-8.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5300MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10600.00	Peak	31.92	18.20	50.12	68.20	-18.08
15900.00	Peak	32.43	26.46	58.89	74.00	-15.11
15900.00	Average	20.20	26.46	46.66	54.00	-7.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5300MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

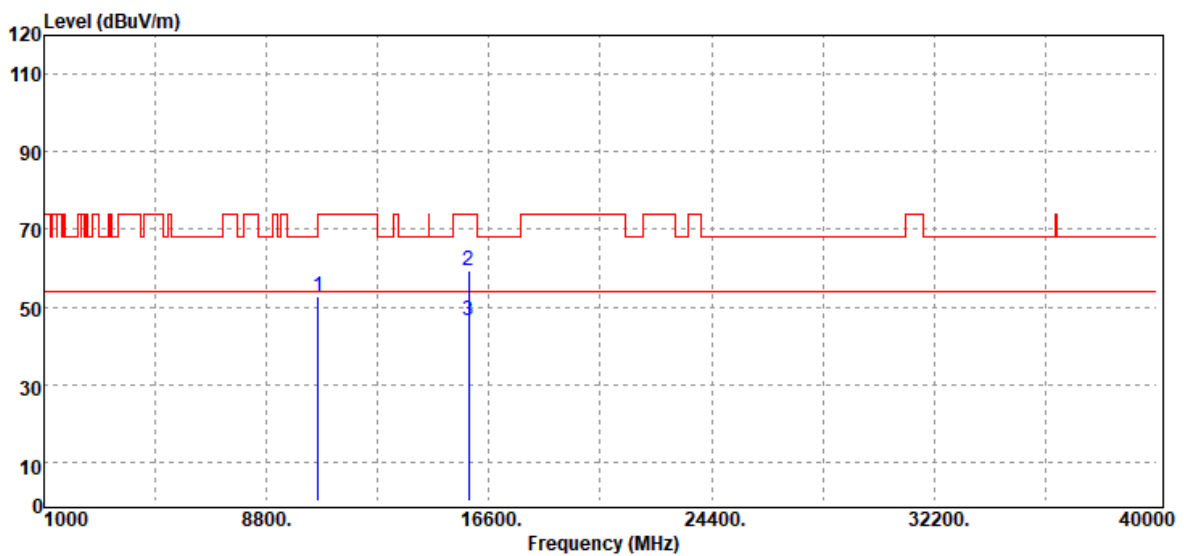


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	34.47	18.20	52.67	68.20	-15.53
15900.00	Peak	33.05	26.46	59.51	74.00	-14.49
15900.00	Average	20.08	26.46	46.54	54.00	-7.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5320 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

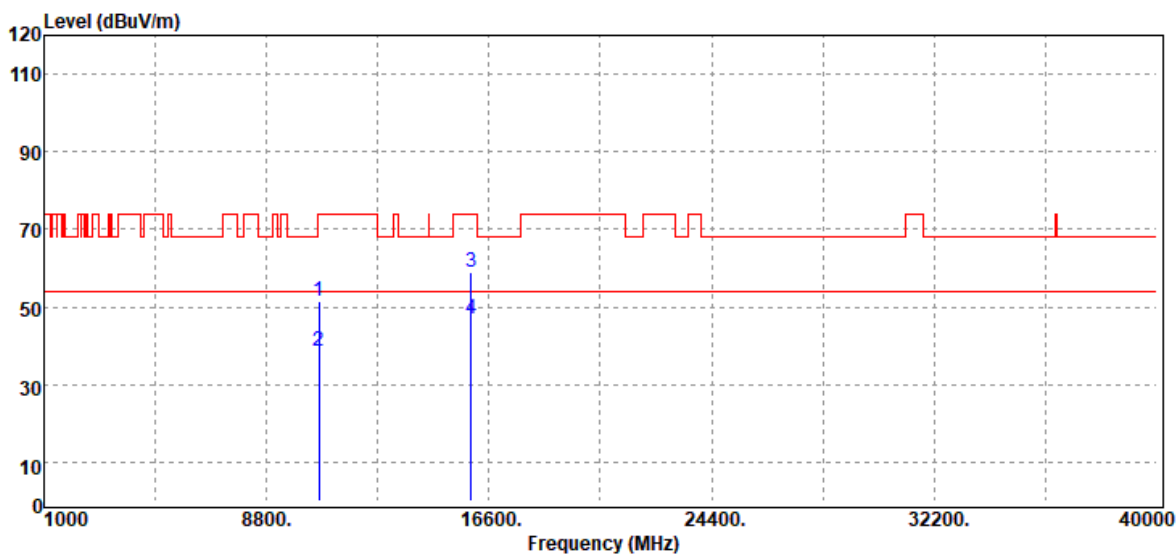


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	33.20	18.36	51.56	74.00	-22.44
10640.00	Average	20.16	18.36	38.52	54.00	-15.48
15960.00	Peak	32.10	26.84	58.94	74.00	-15.06
15960.00	Average	20.08	26.84	46.92	54.00	-7.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5320 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

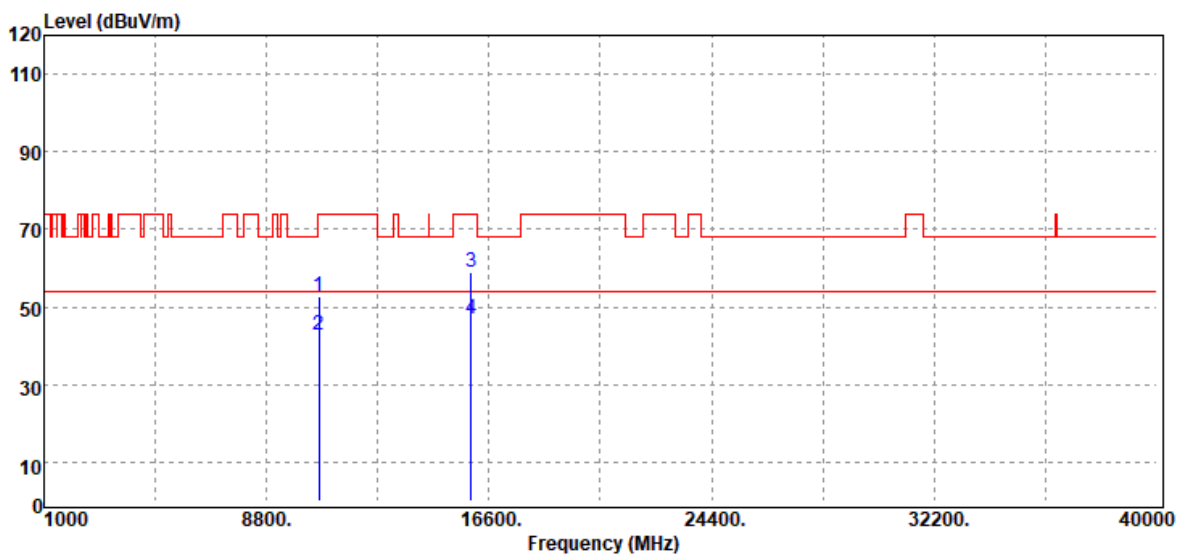


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	34.43	18.36	52.79	74.00	-21.21
10640.00	Average	24.25	18.36	42.61	54.00	-11.39
15960.00	Peak	31.98	26.84	58.82	74.00	-15.18
15960.00	Average	20.12	26.84	46.96	54.00	-7.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5270 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

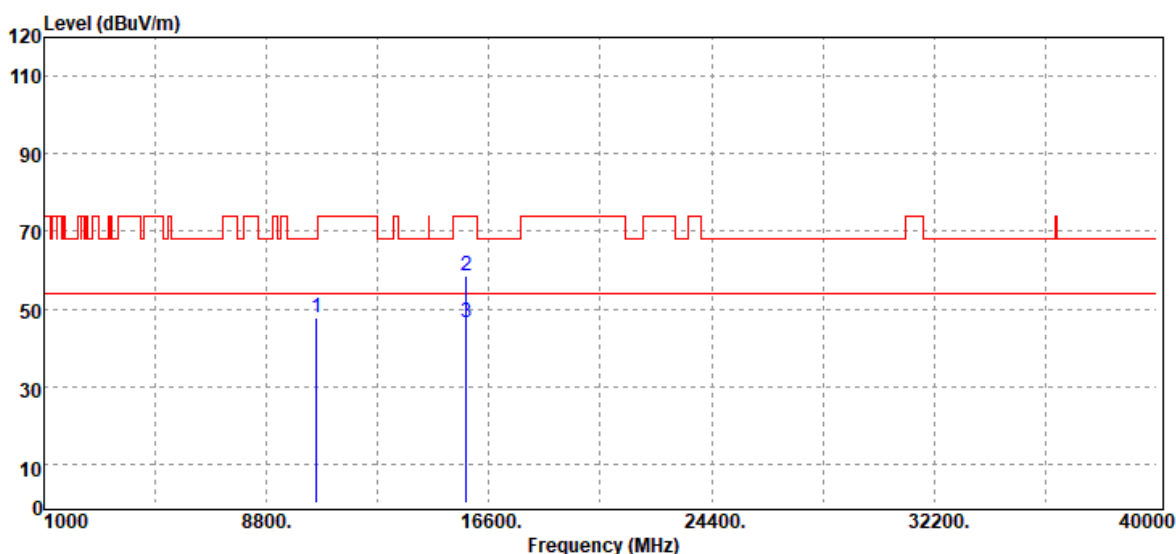


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	29.76	18.19	47.95	68.20	-20.25
15810.00	Peak	32.53	25.92	58.45	74.00	-15.55
15810.00	Average	20.52	25.92	46.44	54.00	-7.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5270 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

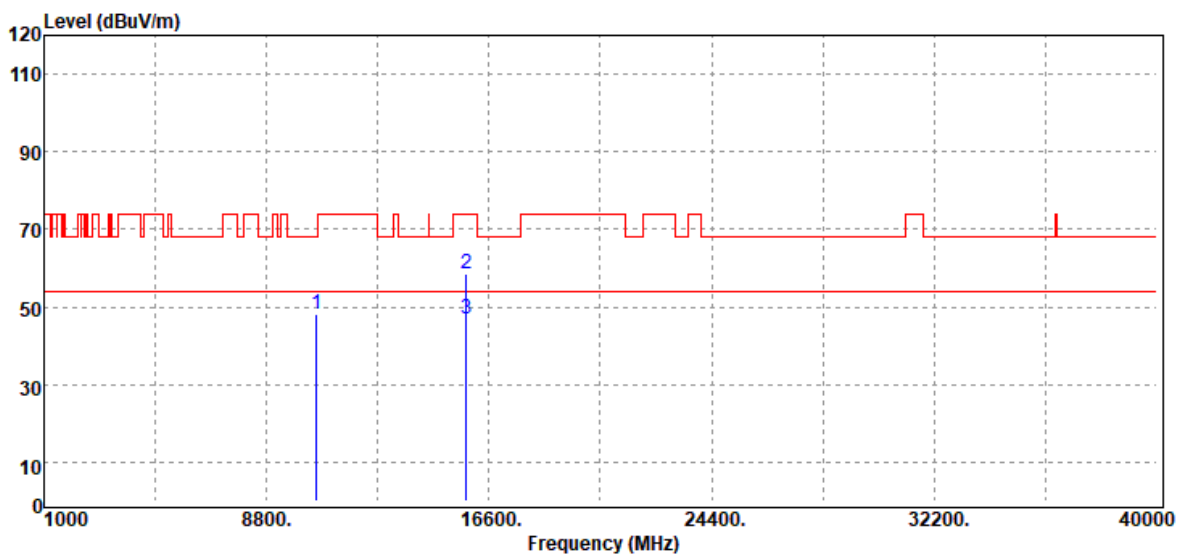


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10540.00	Peak	29.90	18.19	48.09	68.20	-20.11
15810.00	Peak	32.68	25.92	58.60	74.00	-15.40
15810.00	Average	20.94	25.92	46.86	54.00	-7.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5310 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

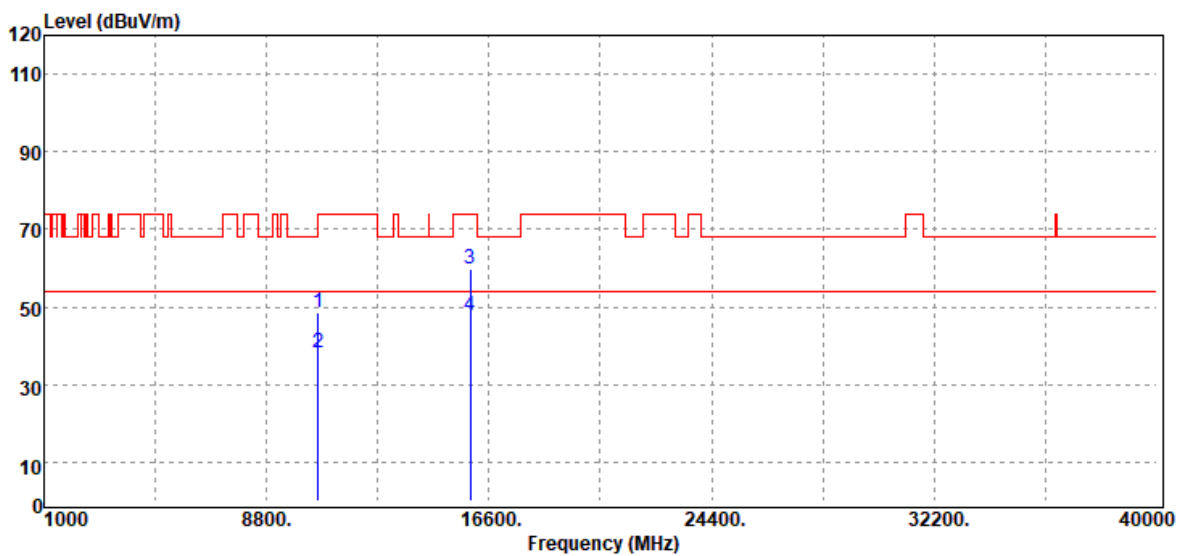


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	30.24	18.28	48.52	74.00	-25.48
10620.00	Average	19.87	18.28	38.15	54.00	-15.85
15930.00	Peak	33.21	26.63	59.84	74.00	-14.16
15930.00	Average	21.05	26.63	47.68	54.00	-6.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5310 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

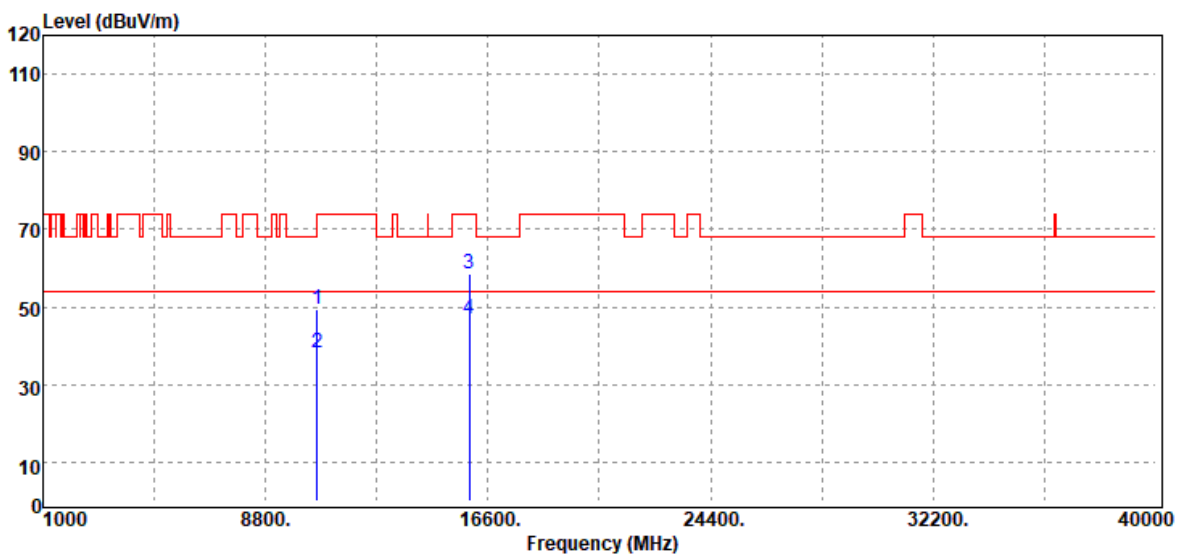


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	31.11	18.28	49.39	74.00	-24.61
10620.00	Average	19.96	18.28	38.24	54.00	-15.76
15930.00	Peak	31.76	26.63	58.39	74.00	-15.61
15930.00	Average	20.40	26.63	47.03	54.00	-6.97
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

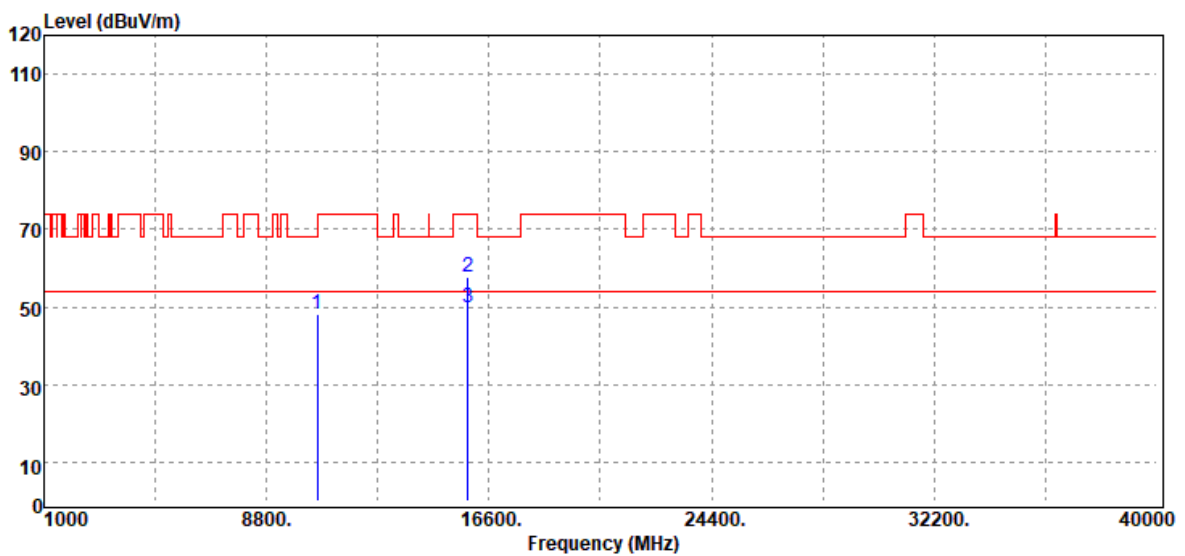


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10580.00	Peak	30.03	18.20	48.23	68.20	-19.97
15870.00	Peak	31.70	26.22	57.92	74.00	-16.08
15870.00	Average	23.47	26.22	49.69	54.00	-4.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

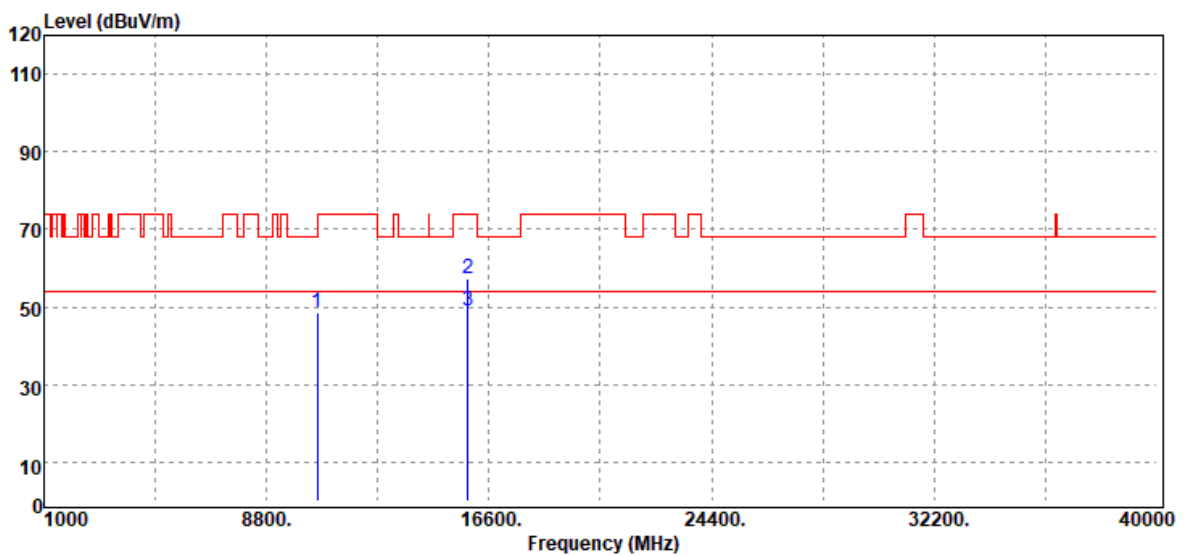


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10580.00	Peak	30.58	18.20	48.78	68.20	-19.42
15870.00	Peak	31.25	26.22	57.47	74.00	-16.53
15870.00	Average	22.74	26.22	48.96	54.00	-5.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5260 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

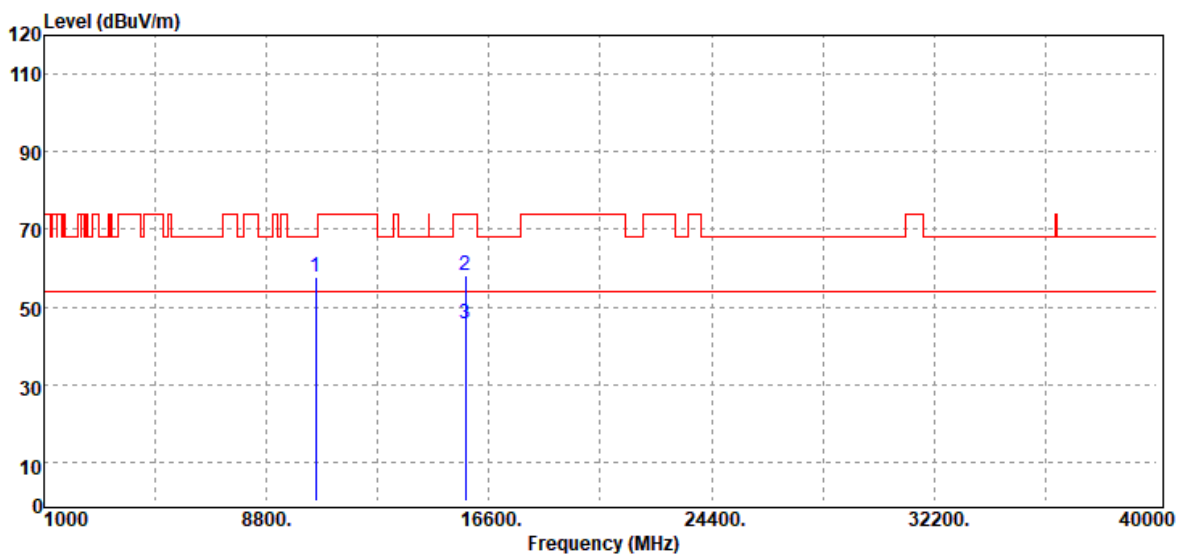


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	39.36	18.16	57.52	68.20	-10.68
15780.00	Peak	32.17	25.81	57.98	74.00	-16.02
15780.00	Average	19.81	25.81	45.62	54.00	-8.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5260 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

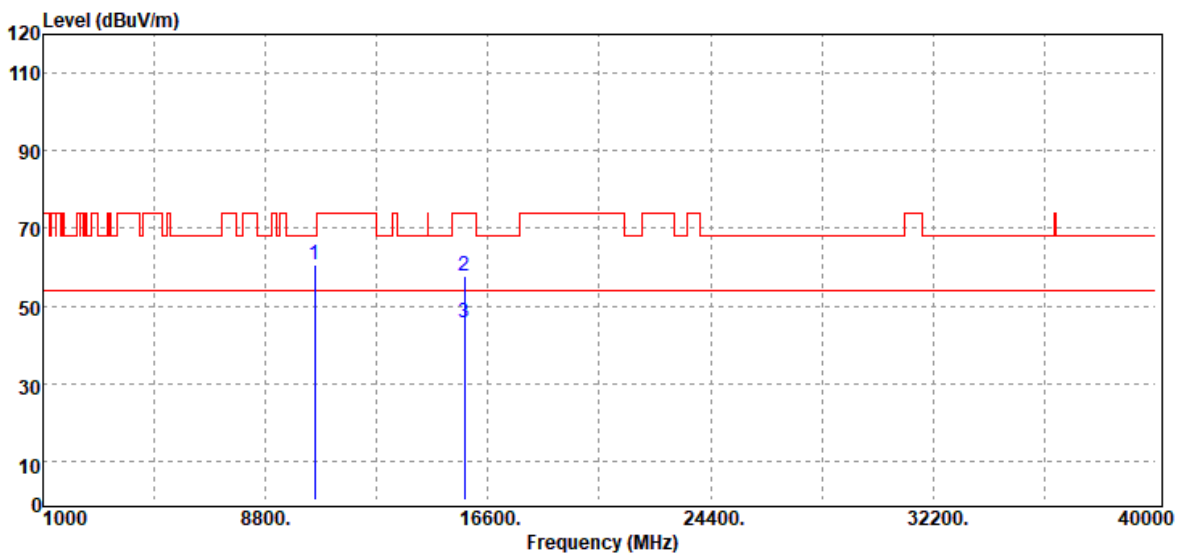


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	42.47	18.16	60.63	68.20	-7.57
15780.00	Peak	32.05	25.81	57.86	74.00	-16.14
15780.00	Average	19.88	25.81	45.69	54.00	-8.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5300 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

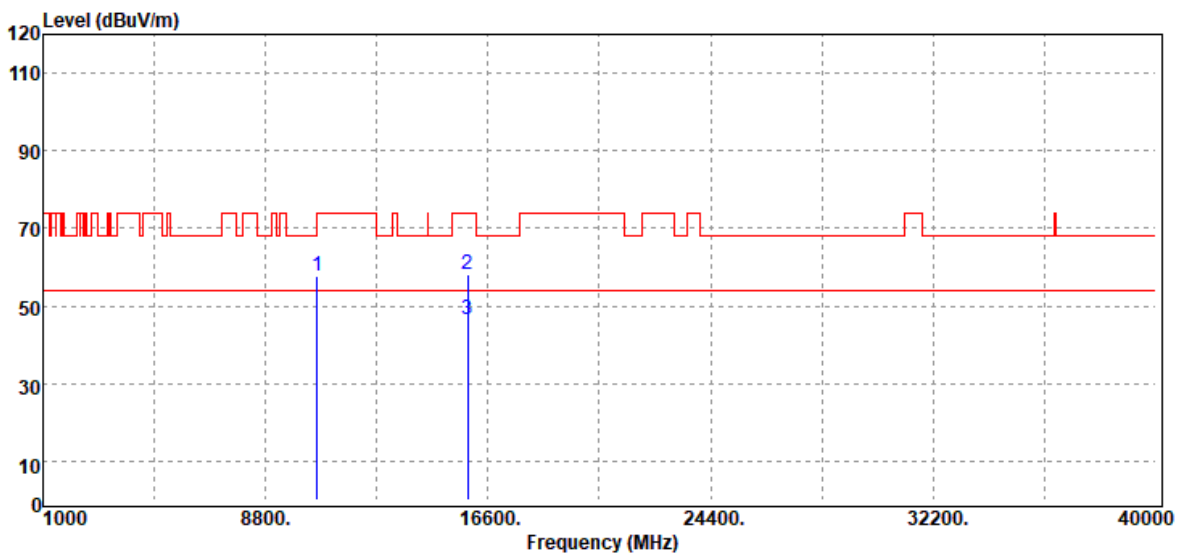


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	39.47	18.20	57.67	68.20	-10.53
15900.00	Peak	31.79	26.46	58.25	74.00	-15.75
15900.00	Average	20.04	26.46	46.50	54.00	-7.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5300 MHz_106/53	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

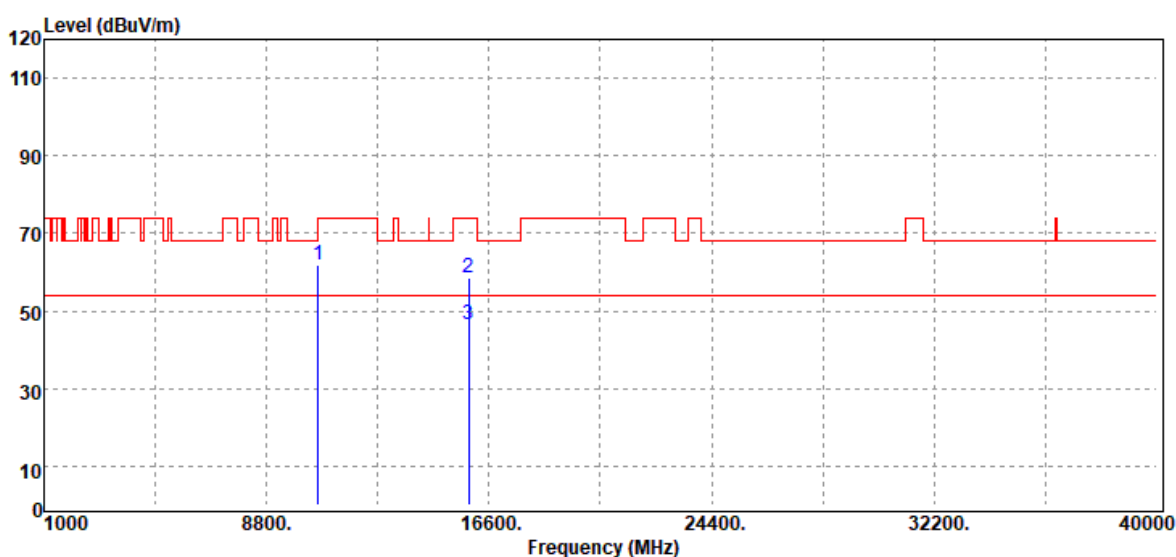


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	43.64	18.20	61.84	68.20	-6.36
15900.00	Peak	32.02	26.46	58.48	74.00	-15.52
15900.00	Average	20.14	26.46	46.60	54.00	-7.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

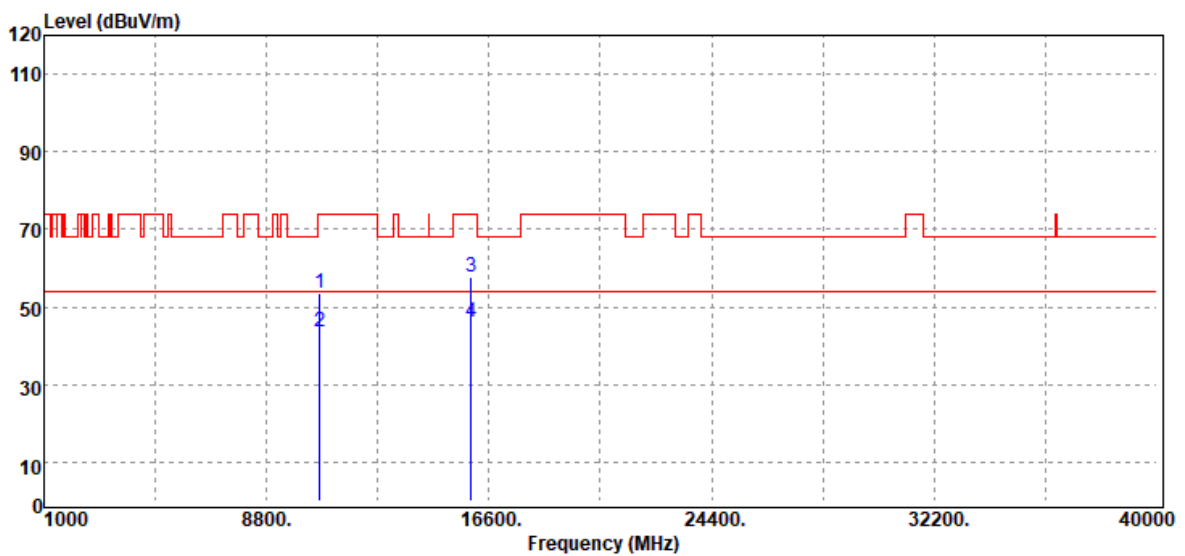

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10656.30	Peak	34.98	18.44	53.42	74.00	-20.58
10656.30	Average	24.97	18.44	43.41	54.00	-10.59
15960.00	Peak	30.99	26.84	57.83	74.00	-16.17
15960.00	Average	19.08	26.84	45.92	54.00	-8.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10656.30	Peak	36.60	18.44	55.04	74.00	-18.96
10656.30	Average	26.33	18.44	44.77	54.00	-9.23
15960.00	Peak	31.70	26.84	58.54	74.00	-15.46
15960.00	Average	18.89	26.84	45.73	54.00	-8.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

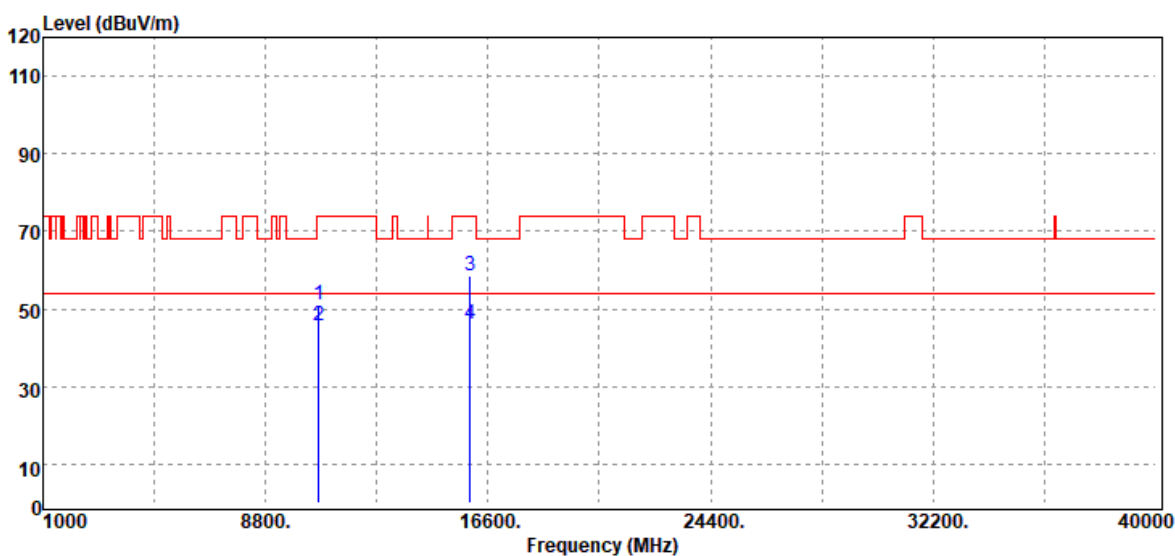

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10656.30	Peak	32.80	18.44	51.24	74.00	-22.76
10656.30	Average	27.09	18.44	45.53	54.00	-8.47
15960.00	Peak	31.62	26.84	58.46	74.00	-15.54
15960.00	Average	19.26	26.84	46.10	54.00	-7.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10656.30	Peak	36.74	18.44	55.18	74.00	-18.82
10656.30	Average	26.91	18.44	45.35	54.00	-8.65
15960.00	Peak	31.41	26.84	58.25	74.00	-15.75
15960.00	Average	19.07	26.84	45.91	54.00	-8.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

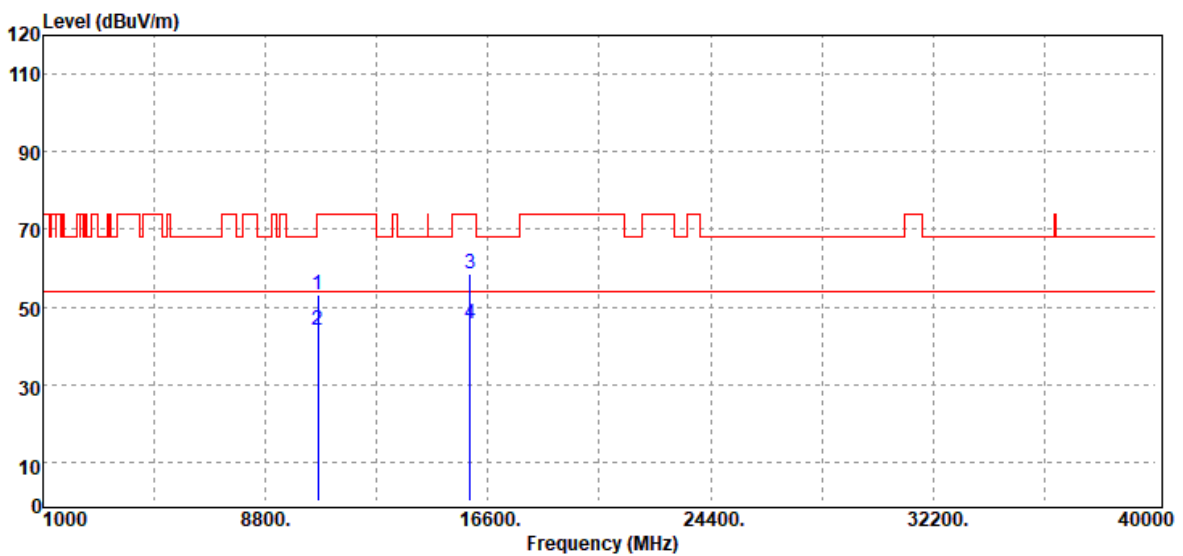

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10646.20	Peak	34.68	18.39	53.07	74.00	-20.93
10646.20	Average	25.64	18.39	44.03	54.00	-9.97
15960.00	Peak	31.57	26.84	58.41	74.00	-15.59
15960.00	Average	19.01	26.84	45.85	54.00	-8.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10646.20	Peak	38.95	18.39	57.34	74.00	-16.66
10646.20	Average	29.29	18.39	47.68	54.00	-6.32
15960.00	Peak	30.99	26.84	57.83	74.00	-16.17
15960.00	Average	19.11	26.84	45.95	54.00	-8.05
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5270 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

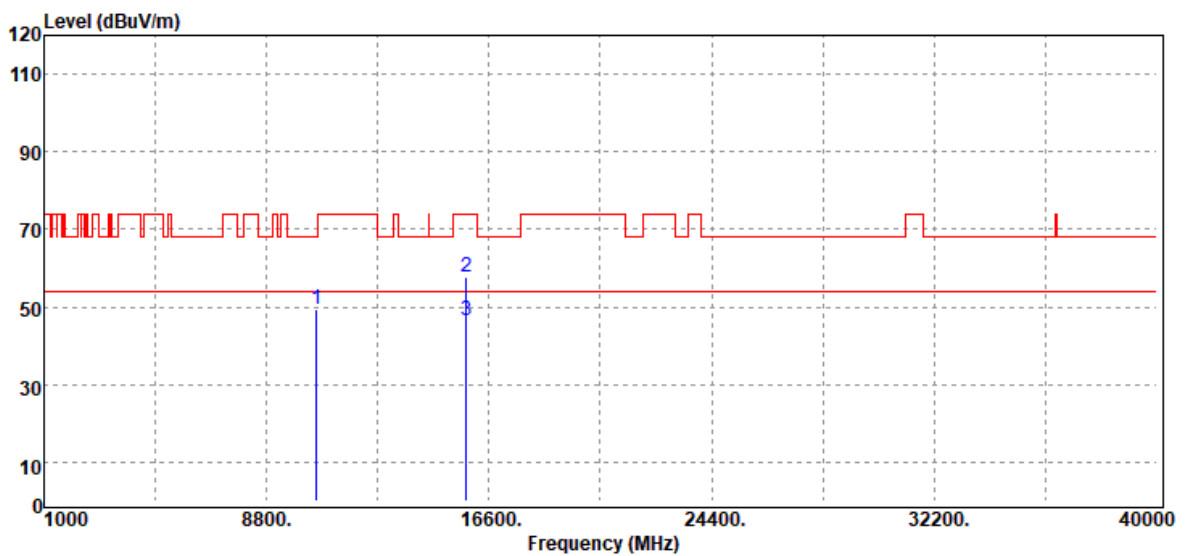


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10540.00	Peak	31.09	18.19	49.28	68.20	-18.92
15810.00	Peak	31.84	25.92	57.76	74.00	-16.24
15810.00	Average	20.38	25.92	46.30	54.00	-7.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5270 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

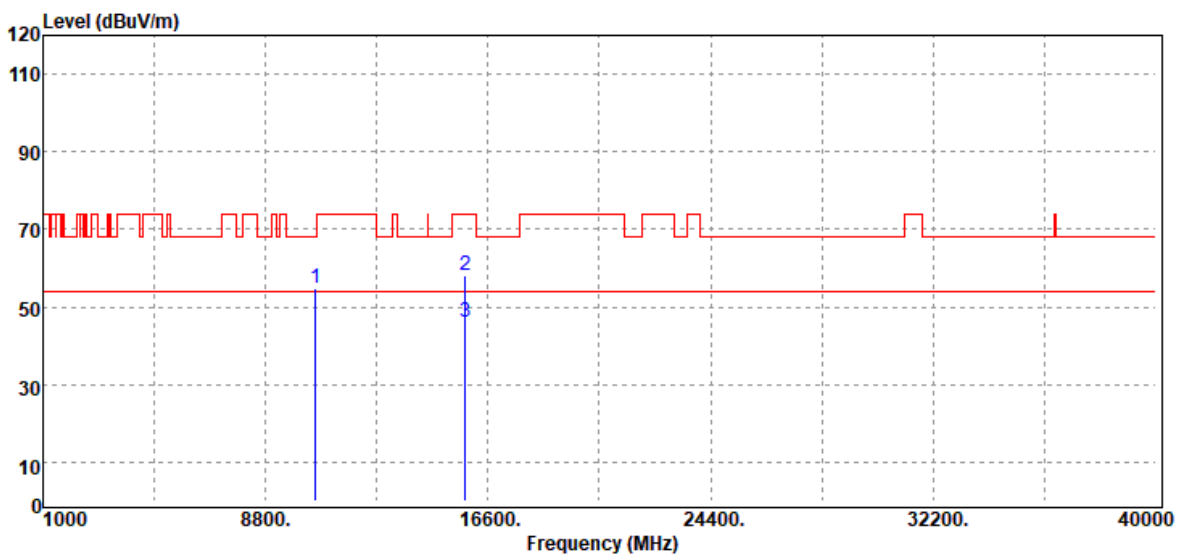


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10540.00	Peak	36.77	18.19	54.96	68.20	-13.24
15810.00	Peak	32.23	25.92	58.15	74.00	-15.85
15810.00	Average	20.04	25.92	45.96	54.00	-8.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

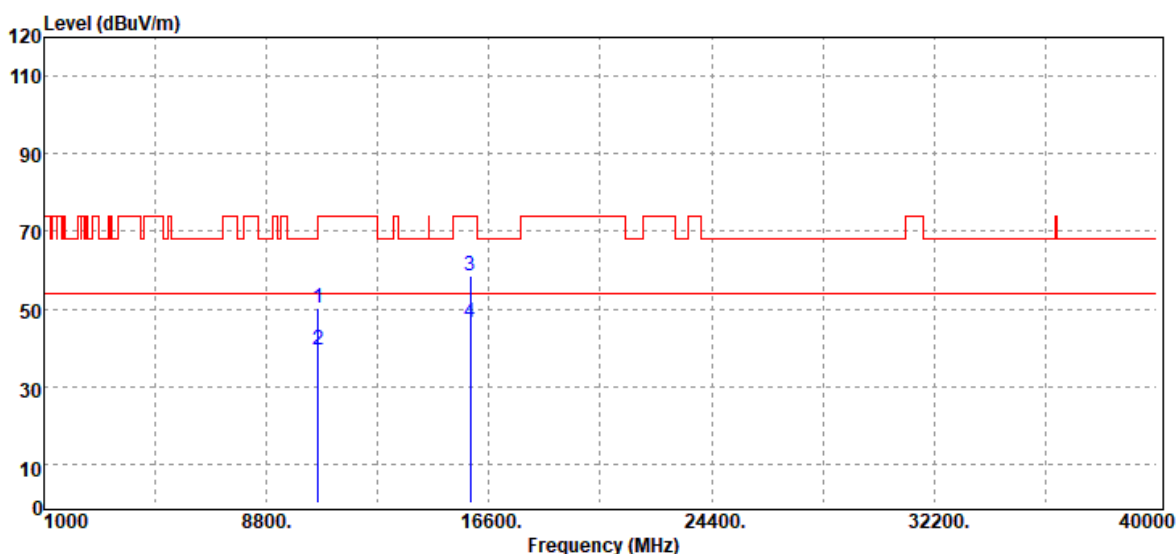


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	31.84	18.28	50.12	74.00	-23.88
10620.00	Average	21.16	18.28	39.44	54.00	-14.56
15930.00	Peak	32.10	26.63	58.73	74.00	-15.27
15930.00	Average	20.03	26.63	46.66	54.00	-7.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

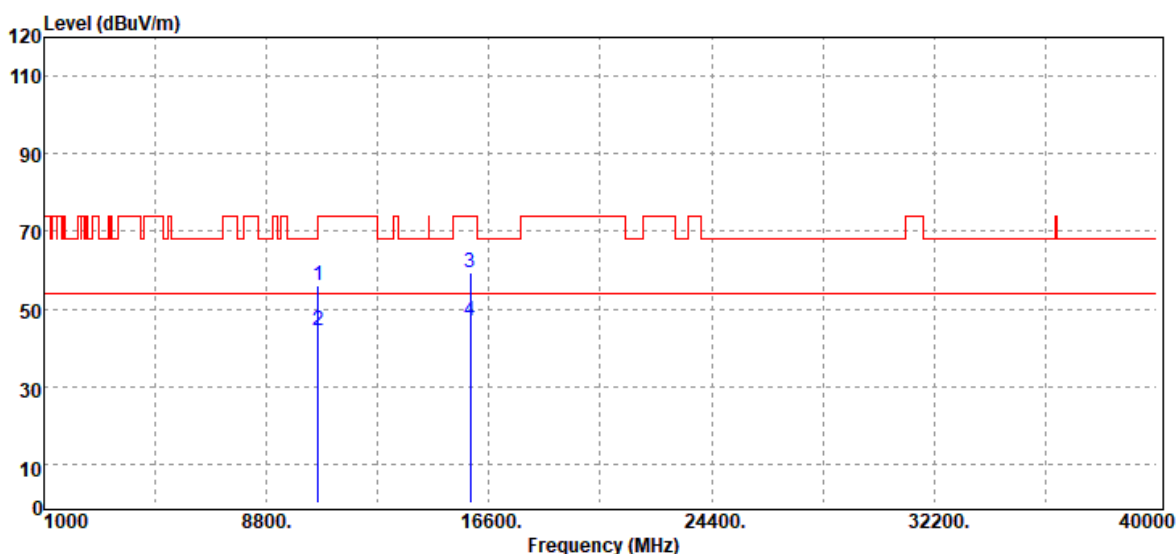


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	37.83	18.28	56.11	74.00	-17.89
10620.00	Average	26.15	18.28	44.43	54.00	-9.57
15930.00	Peak	32.73	26.63	59.36	74.00	-14.64
15930.00	Average	20.09	26.63	46.72	54.00	-7.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

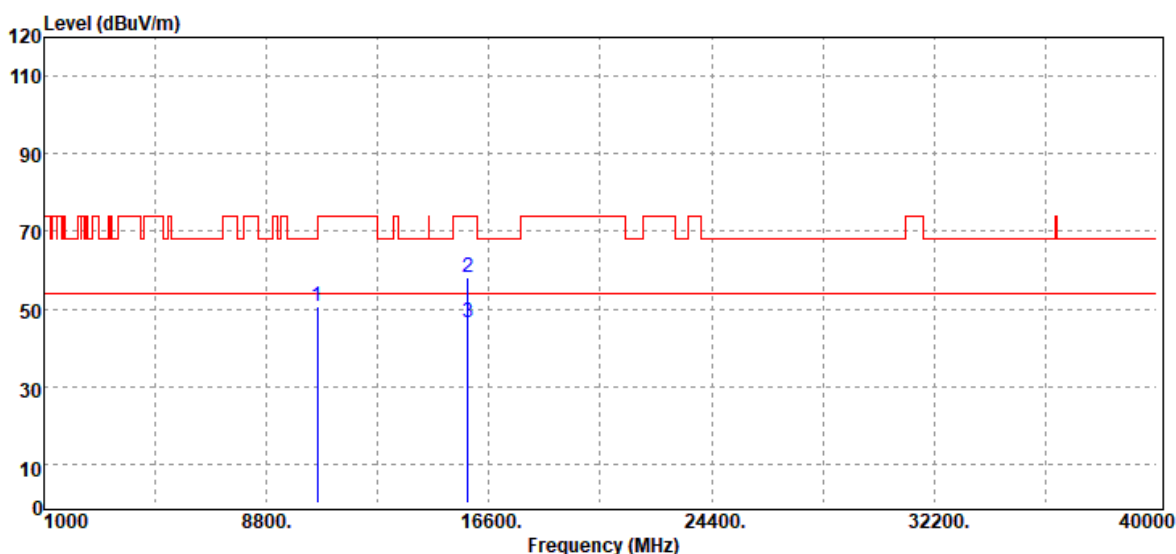


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10580.00	Peak	32.51	18.20	50.71	68.20	-17.49
15870.00	Peak	31.90	26.22	58.12	74.00	-15.88
15870.00	Average	20.49	26.22	46.71	54.00	-7.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

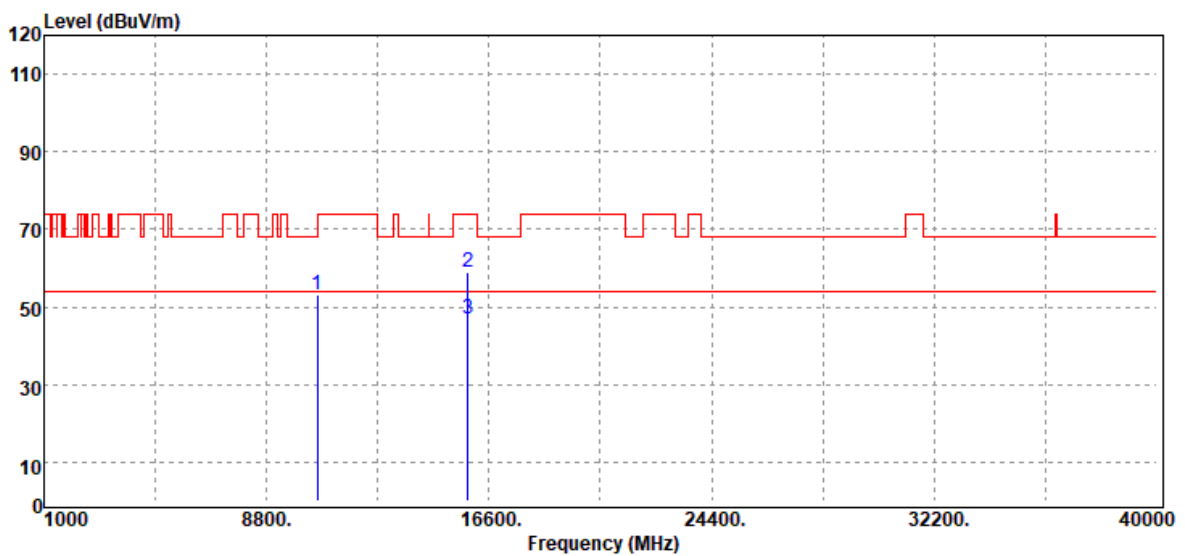

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	35.14	18.20	53.34	68.20	-14.86
15870.00	Peak	32.68	26.22	58.90	74.00	-15.10
15870.00	Average	20.56	26.22	46.78	54.00	-7.22
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Data for UNII-2c (Non-BeamForming Mode)

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.8(°C)/ 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

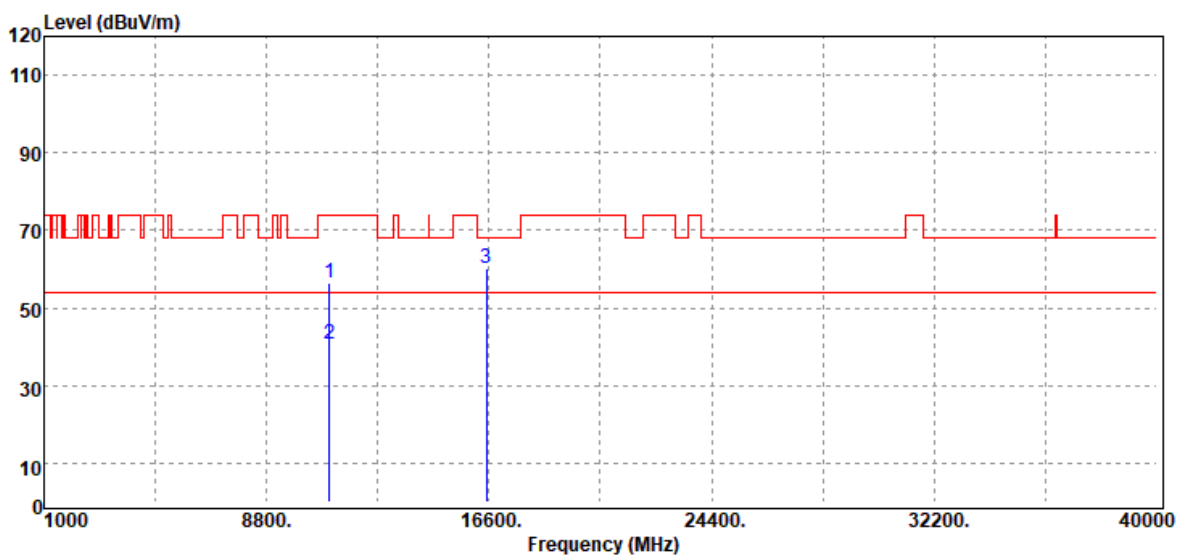


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	37.42	19.04	56.46	74.00	-17.54
11000.00	Average	21.45	19.04	40.49	54.00	-13.51
16500.00	Peak	31.08	29.02	60.10	68.20	-8.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

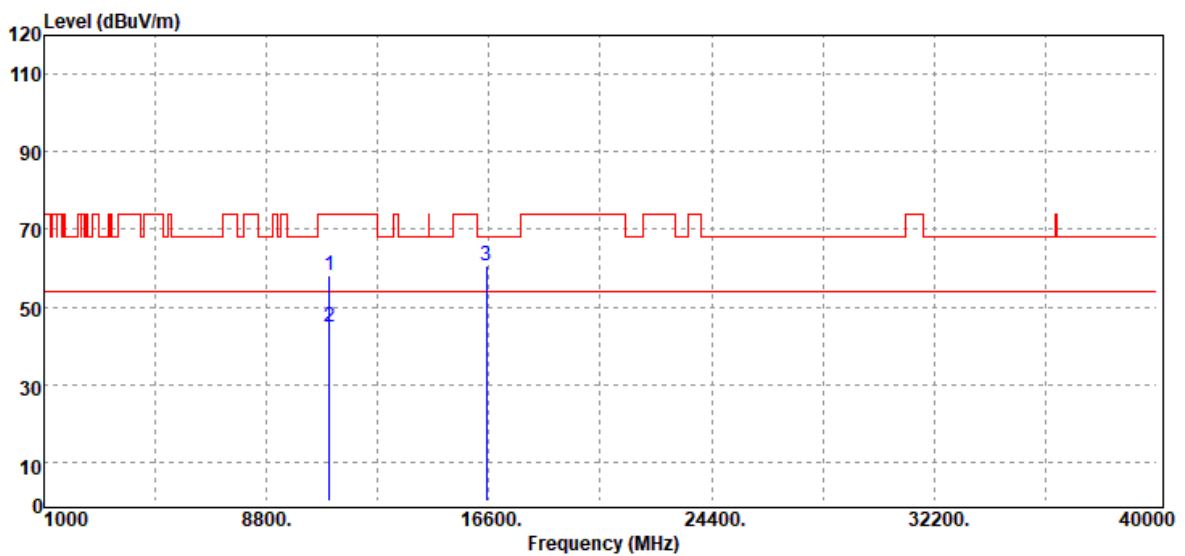


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	38.93	19.04	57.97	74.00	-16.03
11000.00	Average	25.93	19.04	44.97	54.00	-9.03
16500.00	Peak	31.40	29.02	60.42	68.20	-7.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonics	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

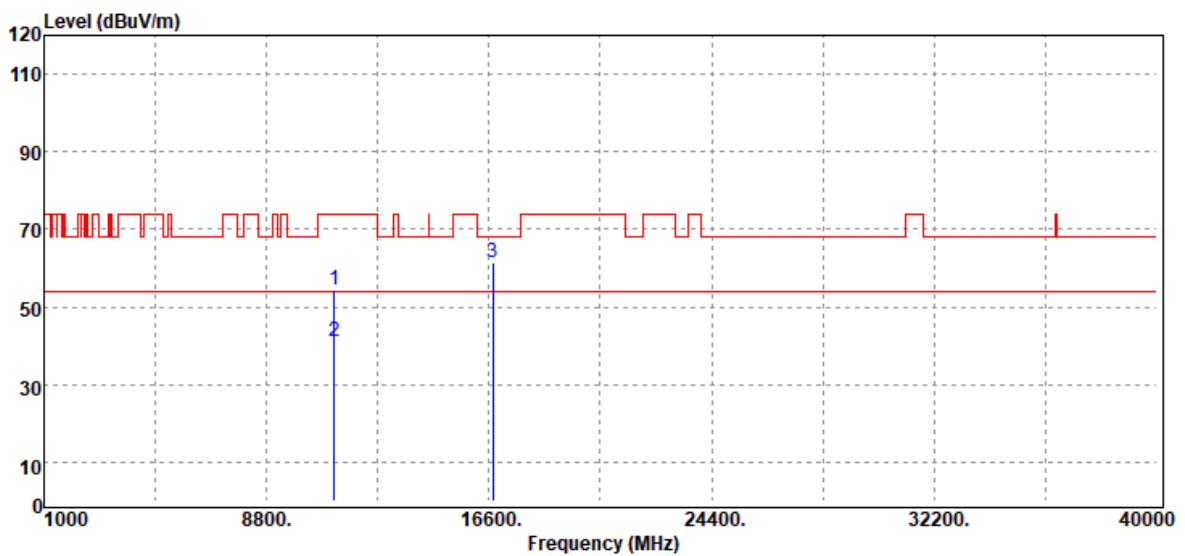

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	35.01	19.23	54.24	74.00	-19.76
11160.00	Average	21.98	19.23	41.21	54.00	-12.79
16740.00	Peak	31.06	30.21	61.27	68.20	-6.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11160.00	Peak	36.78	19.23	56.01	74.00	-17.99
11160.00	Average	26.35	19.23	45.58	54.00	-8.42
16740.00	Peak	30.70	30.21	60.91	68.20	-7.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

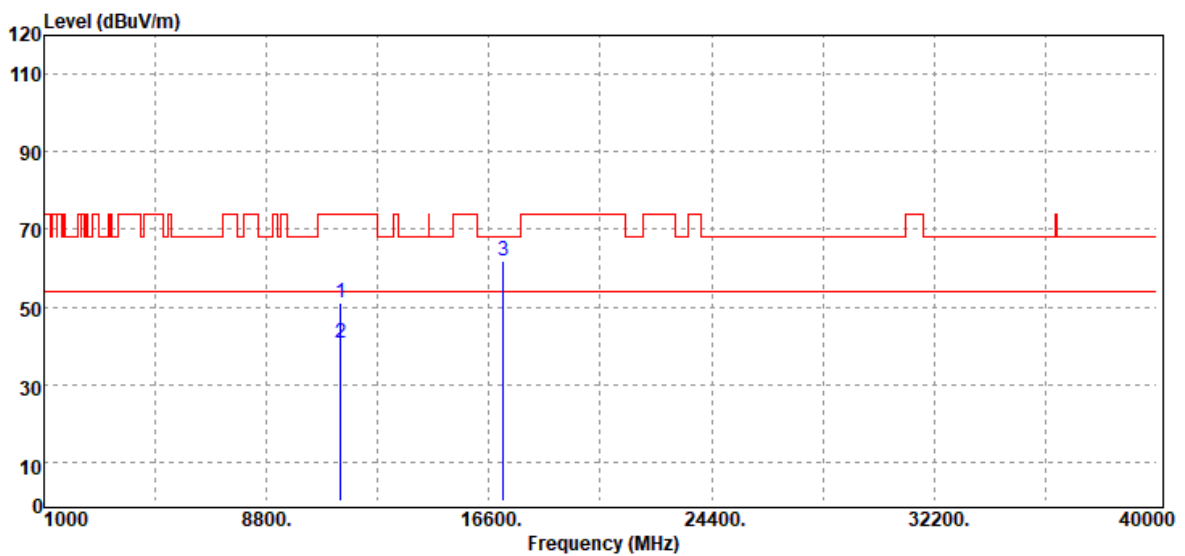


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	31.63	19.58	51.21	74.00	-22.79
11400.00	Average	21.12	19.58	40.70	54.00	-13.30
17100.00	Peak	30.50	31.23	61.73	68.20	-6.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

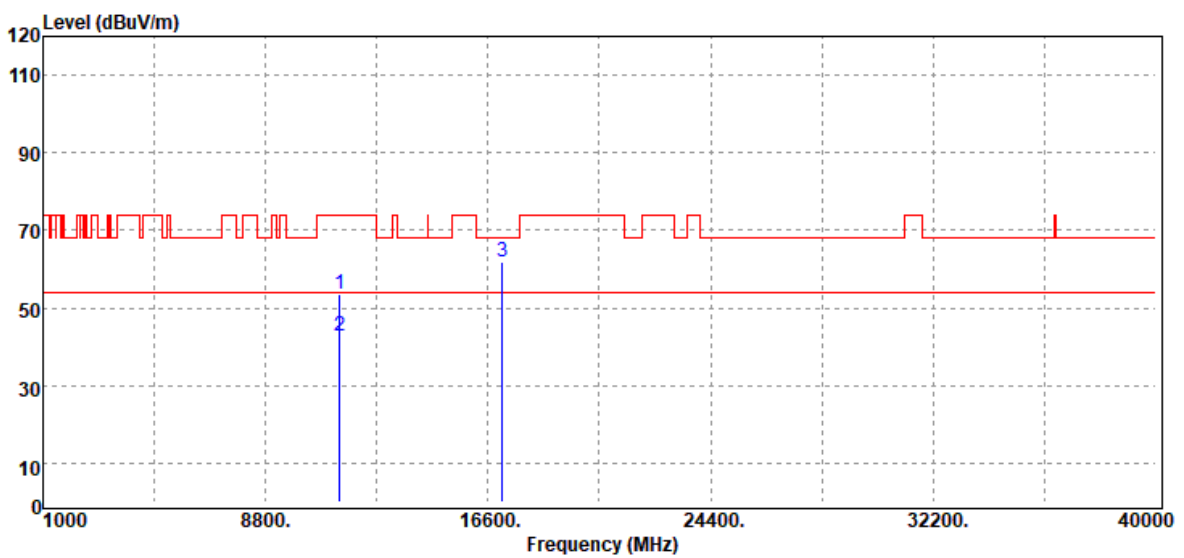


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	33.90	19.58	53.48	74.00	-20.52
11400.00	Average	23.12	19.58	42.70	54.00	-11.30
17100.00	Peak	30.65	31.23	61.88	68.20	-6.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5500 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

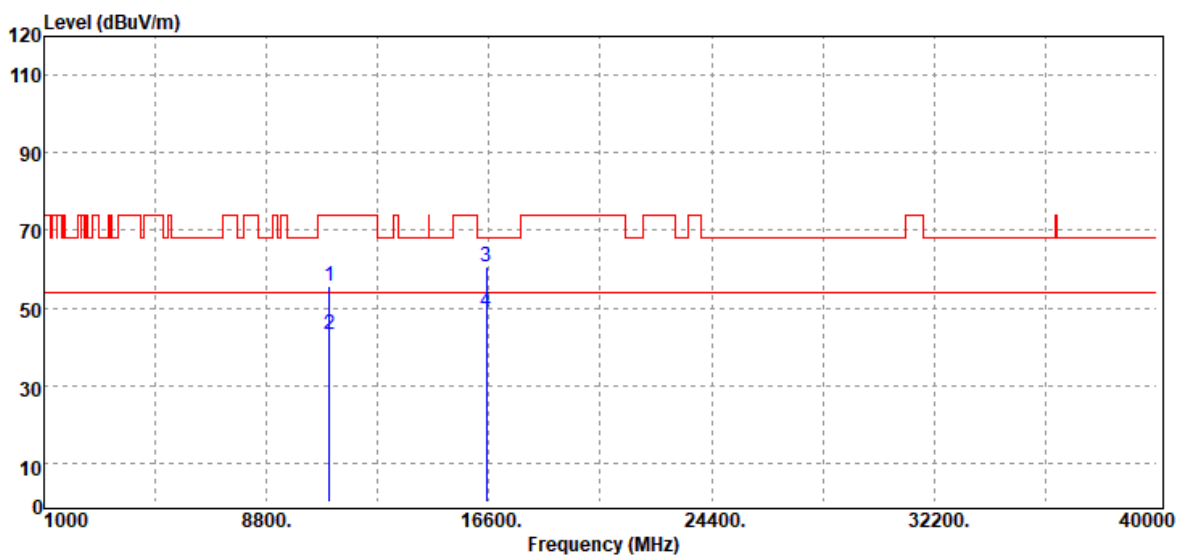


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	36.69	19.04	55.73	74.00	-18.27
11000.00	Average	24.10	19.04	43.14	54.00	-10.86
16500.00	Peak	31.40	29.02	60.42	68.20	-7.78
16500.00	Average	20.03	29.02	49.05	54.00	-4.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5500 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

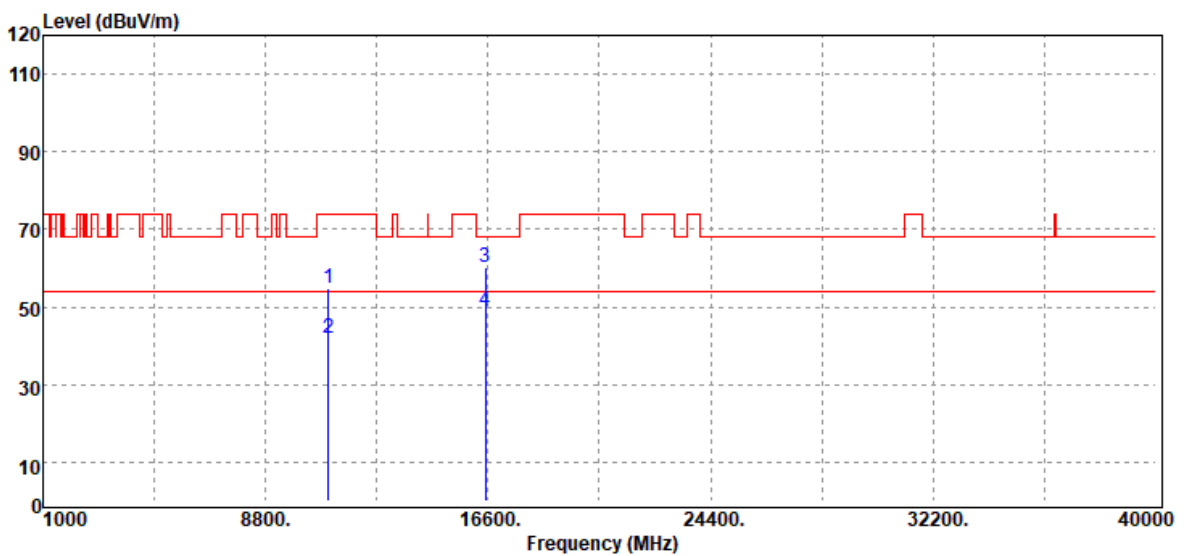


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	35.65	19.04	54.69	74.00	-19.31
11000.00	Average	23.07	19.04	42.11	54.00	-11.89
16500.00	Peak	31.04	29.02	60.06	68.20	-8.14
16500.00	Average	19.88	29.02	48.90	54.00	-5.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5580 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

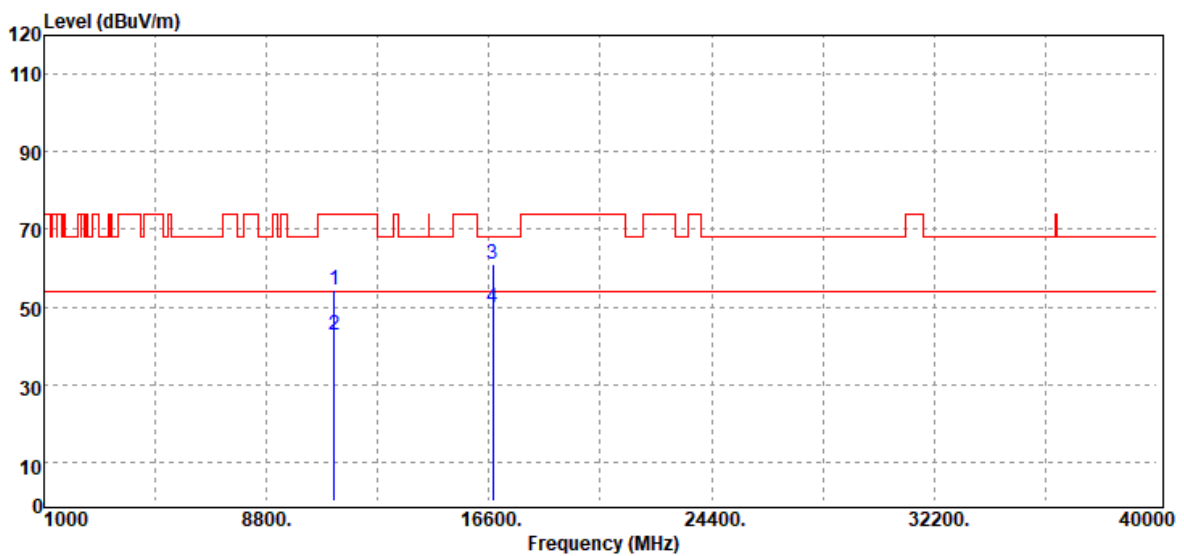


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	35.16	19.23	54.39	74.00	-19.61
11160.00	Average	23.44	19.23	42.67	54.00	-11.33
16740.00	Peak	31.01	30.21	61.22	68.20	-6.98
16740.00	Average	19.56	30.21	49.77	54.00	-4.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5580 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

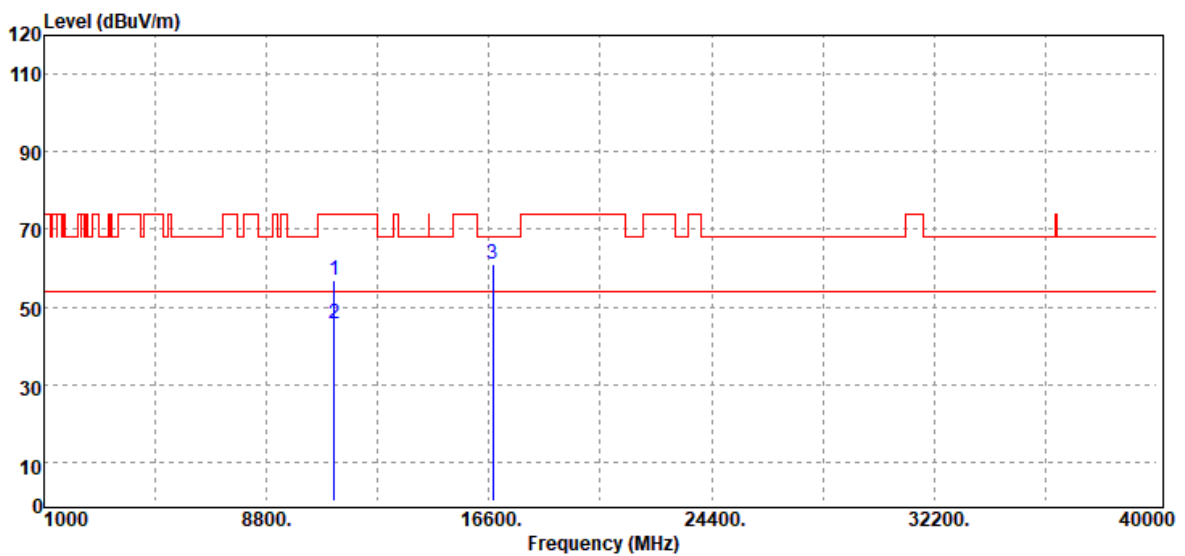


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	37.69	19.23	56.92	74.00	-17.08
11160.00	Average	26.43	19.23	45.66	54.00	-8.34
16740.00	Peak	30.84	30.21	61.05	68.20	-7.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5700 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

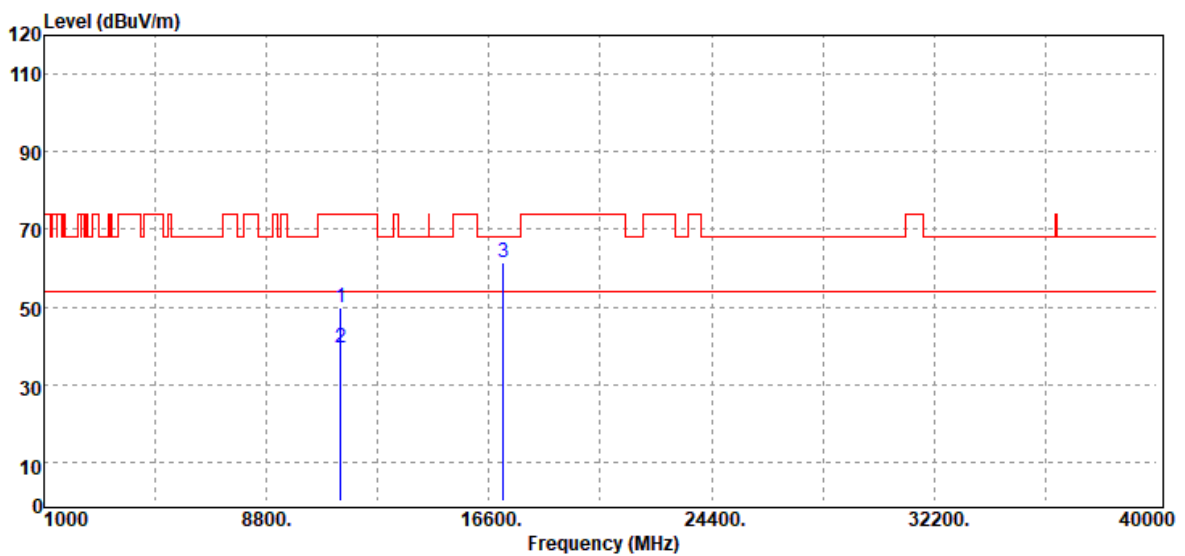


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	30.18	19.58	49.76	74.00	-24.24
11400.00	Average	20.04	19.58	39.62	54.00	-14.38
17100.00	Peak	30.34	31.23	61.57	68.20	-6.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5700MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

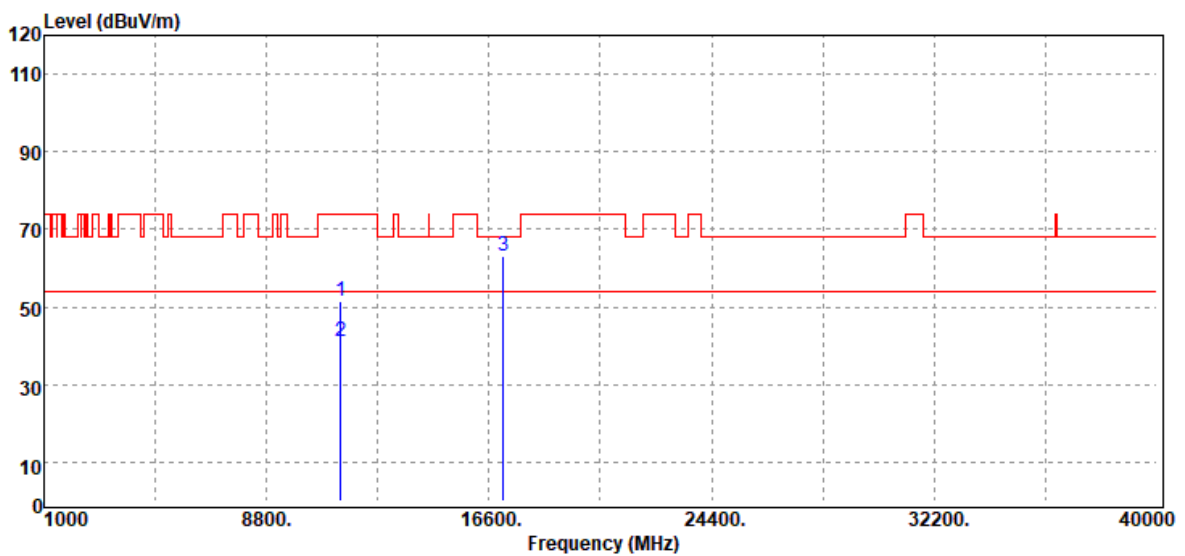


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	32.08	19.58	51.66	74.00	-22.34
11400.00	Average	21.54	19.58	41.12	54.00	-12.88
17100.00	Peak	31.77	31.23	63.00	68.20	-5.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5510 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

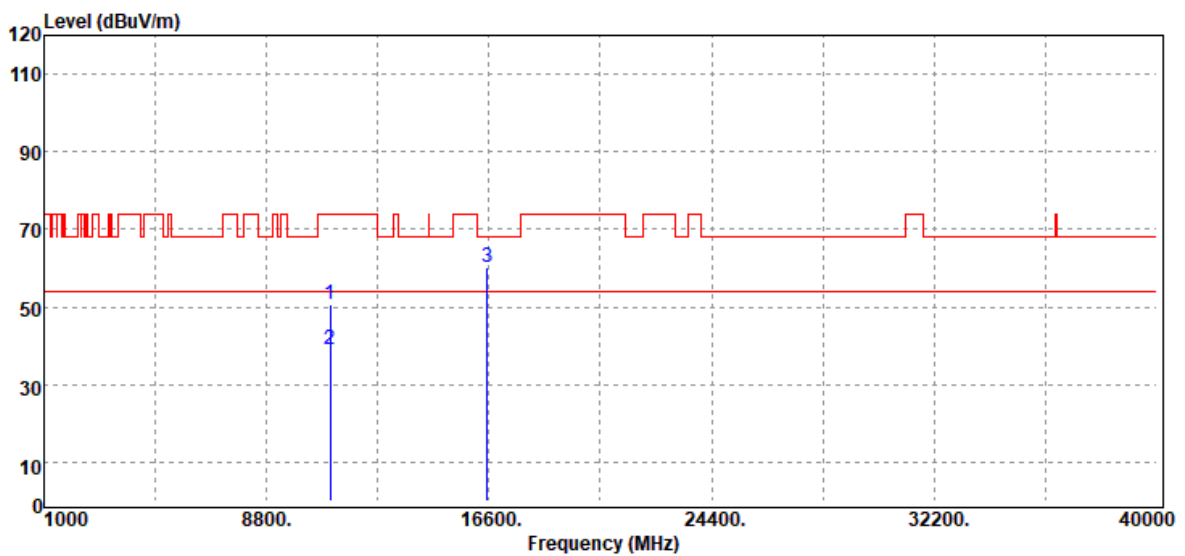


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	31.85	19.00	50.85	74.00	-23.15
11020.00	Average	19.98	19.00	38.98	54.00	-15.02
16530.00	Peak	31.33	28.97	60.30	68.20	-7.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

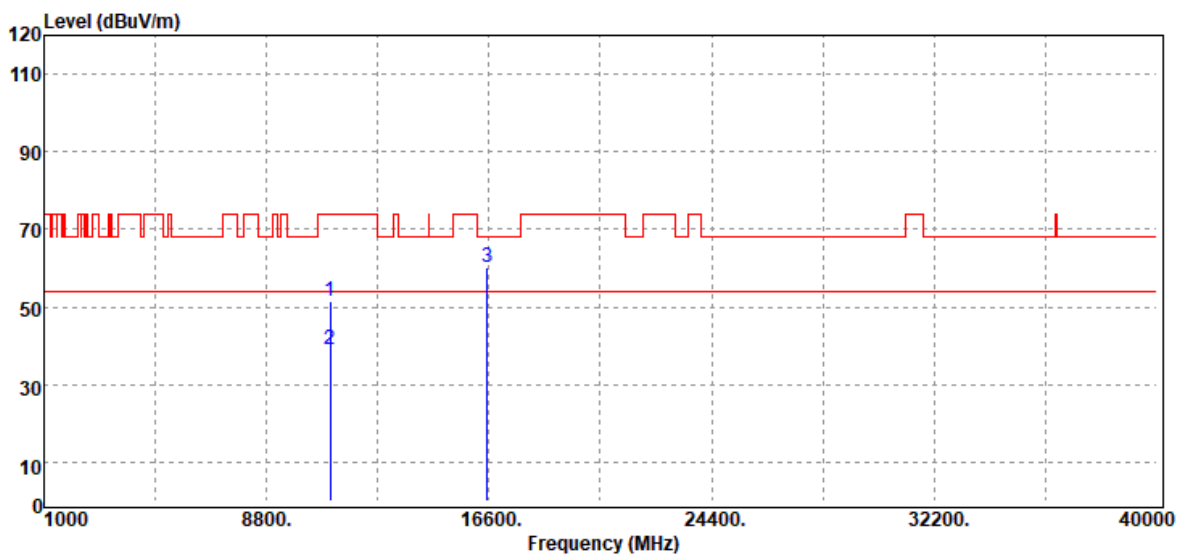


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	32.31	19.00	51.31	74.00	-22.69
11020.00	Average	20.10	19.00	39.10	54.00	-14.90
16530.00	Peak	31.28	28.97	60.25	68.20	-7.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5550 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

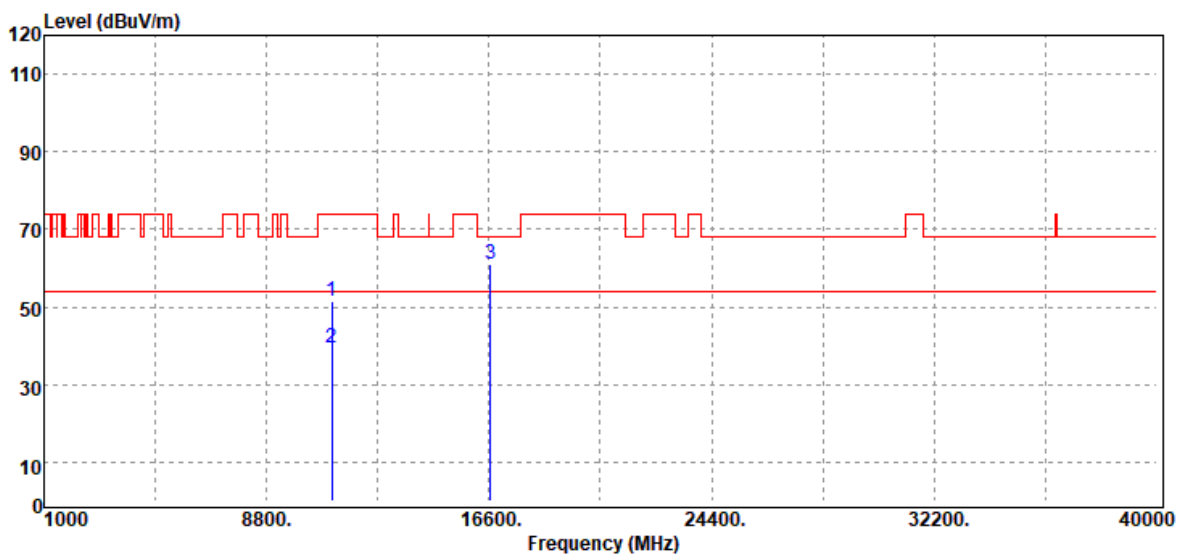


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	32.51	19.11	51.62	74.00	-22.38
11100.00	Average	20.16	19.11	39.27	54.00	-14.73
16650.00	Peak	31.83	29.28	61.11	68.20	-7.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5550 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

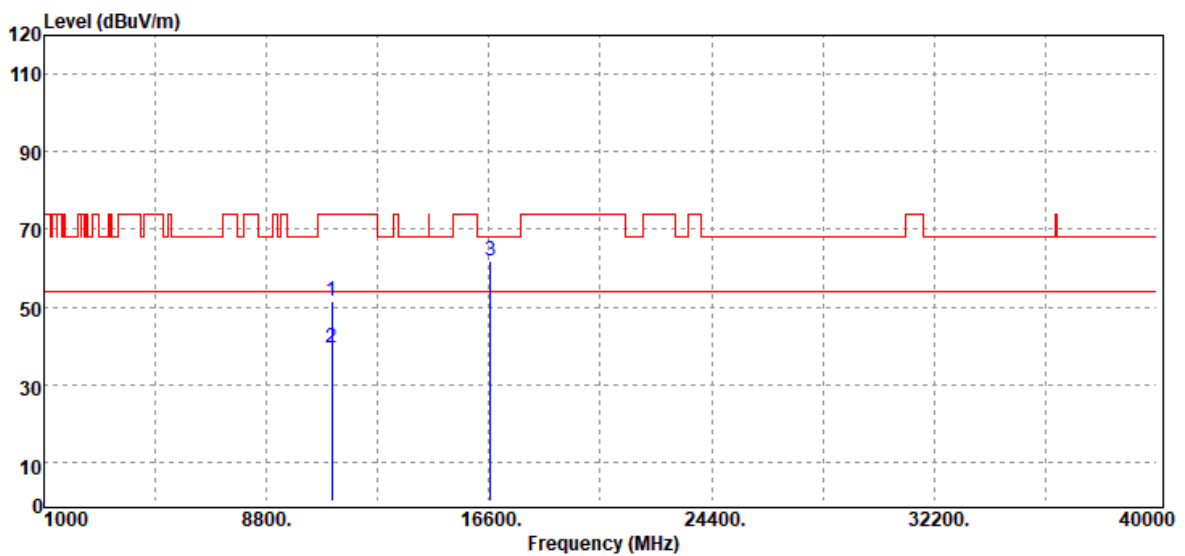


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.00	Peak	32.20	19.11	51.31	74.00	-22.69
11100.00	Average	20.50	19.11	39.61	54.00	-14.39
16650.00	Peak	32.40	29.28	61.68	68.20	-6.52
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5670 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

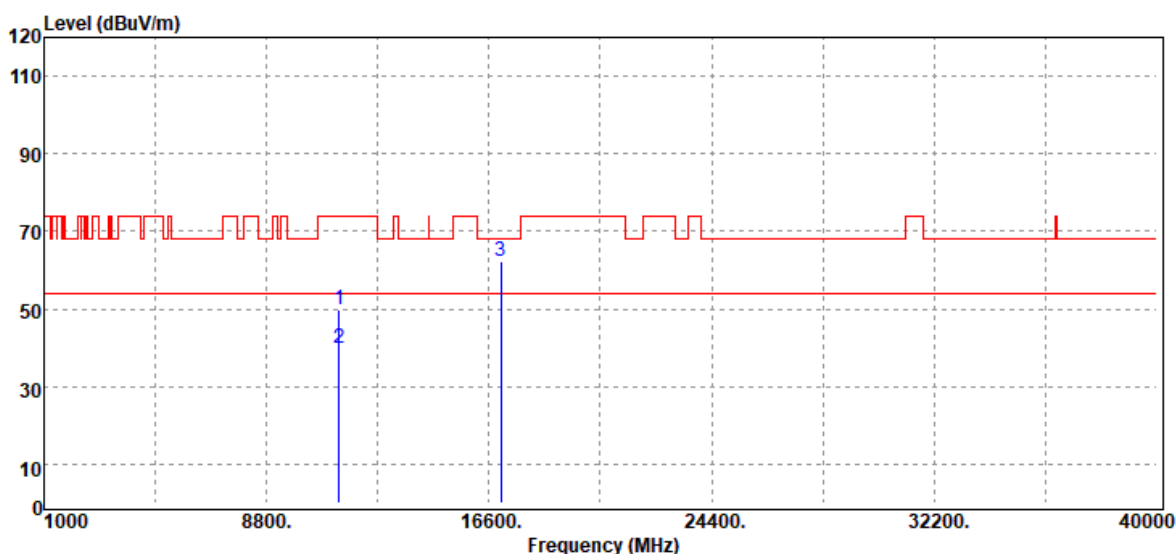


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11340.00	Peak	30.26	19.44	49.70	74.00	-24.30
11340.00	Average	20.61	19.44	40.05	54.00	-13.95
17010.00	Peak	30.70	31.47	62.17	68.20	-6.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5670 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

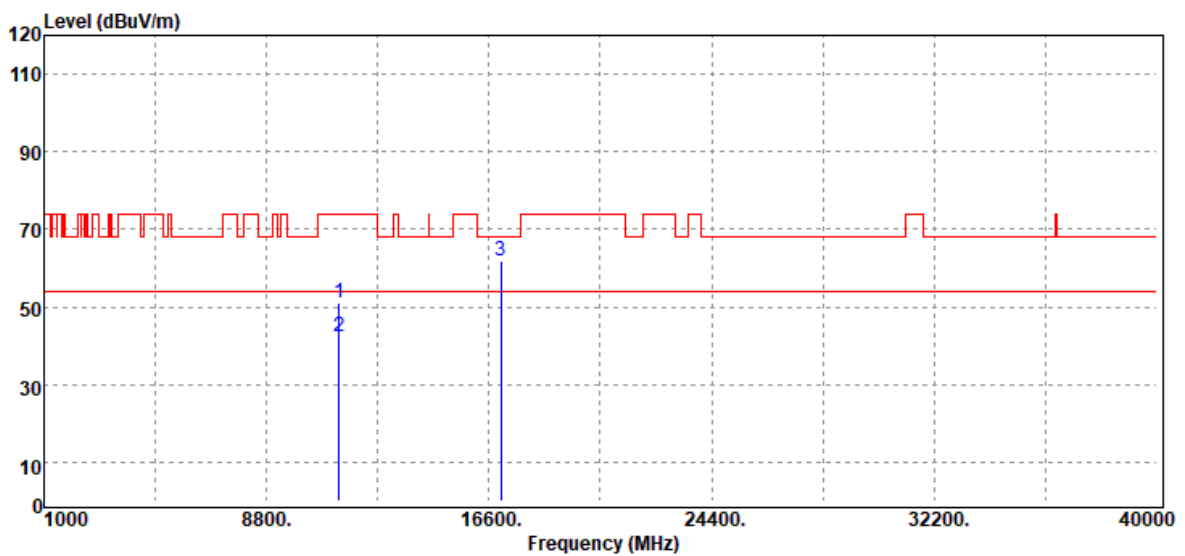


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11340.00	Peak	31.82	19.44	51.26	74.00	-22.74
11340.00	Average	22.83	19.44	42.27	54.00	-11.73
17010.00	Peak	30.48	31.47	61.95	68.20	-6.25
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

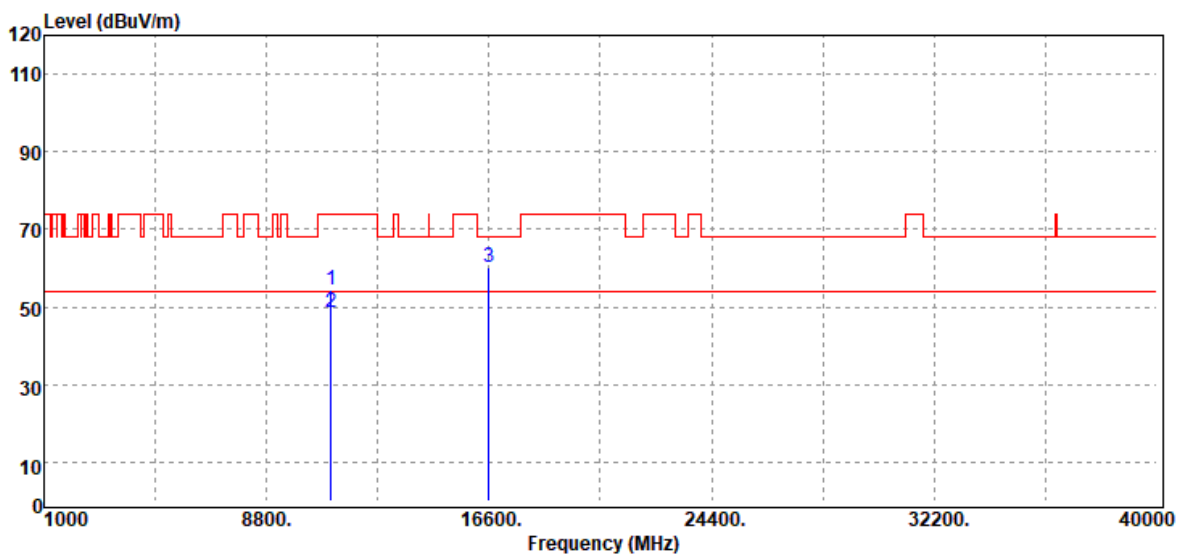


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11060.00	Peak	35.36	18.97	54.33	74.00	-19.67
11060.00	Average	29.41	18.97	48.38	54.00	-5.62
16590.00	Peak	31.07	28.94	60.01	68.20	-8.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

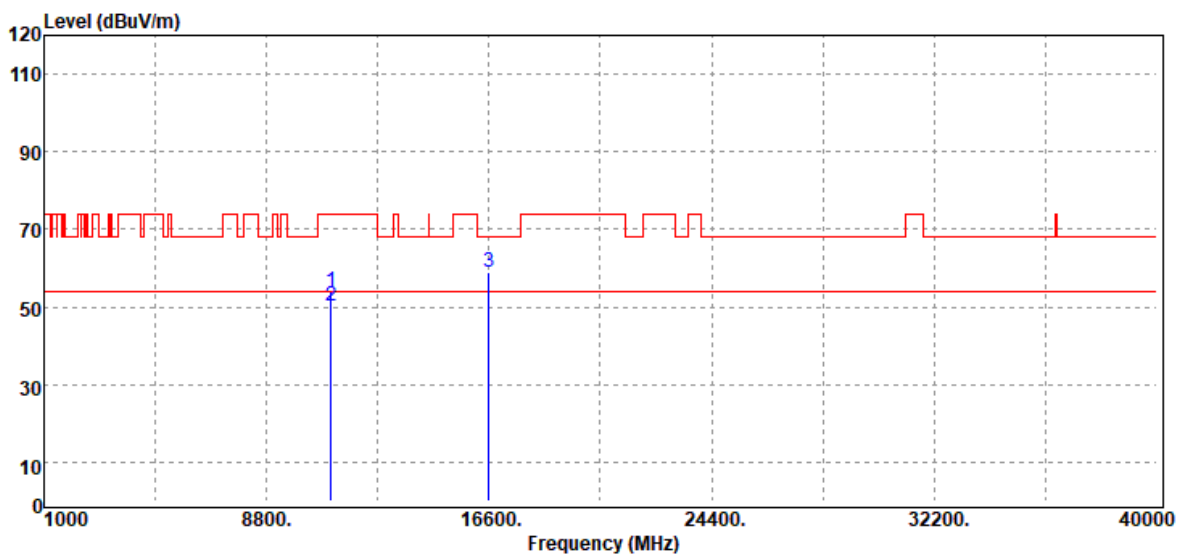


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	35.02	18.97	53.99	74.00	-20.01
11060.00	Average	31.12	18.97	50.09	54.00	-3.91
16590.00	Peak	30.06	28.94	59.00	68.20	-9.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

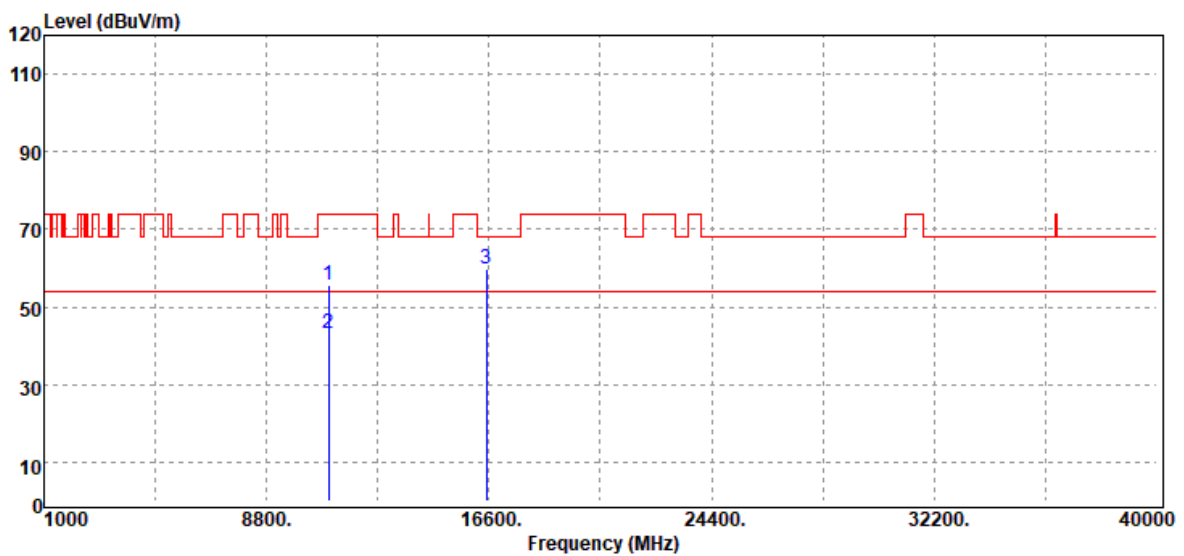


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10979.50	Peak	36.73	18.95	55.68	74.00	-18.32
10979.50	Average	24.39	18.95	43.34	54.00	-10.66
16500.00	Peak	30.75	29.02	59.77	68.20	-8.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

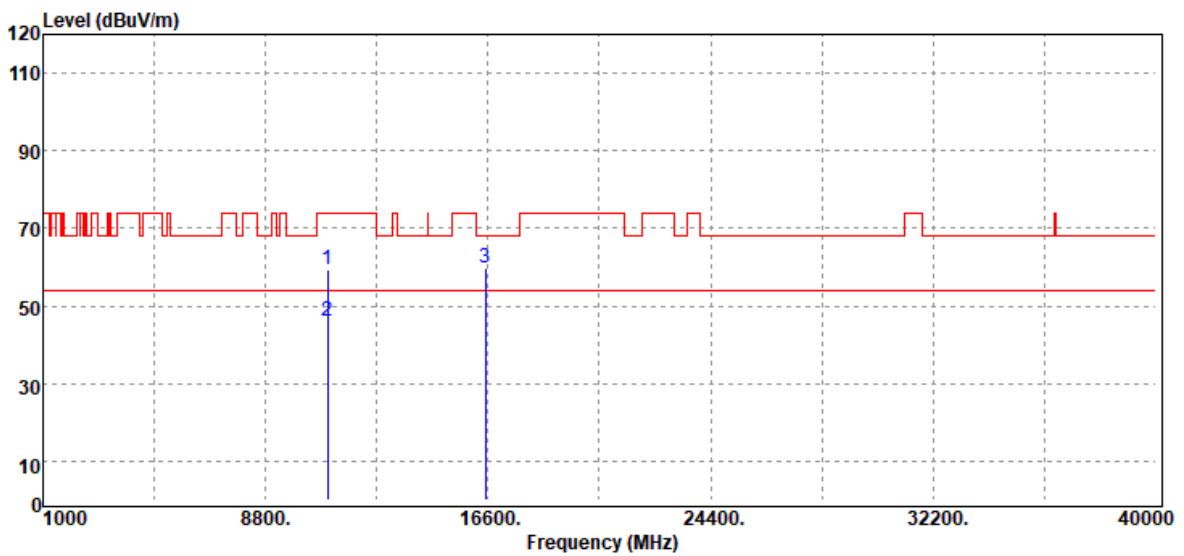


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10979.50	Peak	40.27	18.95	59.22	74.00	-14.78
10979.50	Average	27.25	18.95	46.20	54.00	-7.80
16500.00	Peak	30.75	29.02	59.77	68.20	-8.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

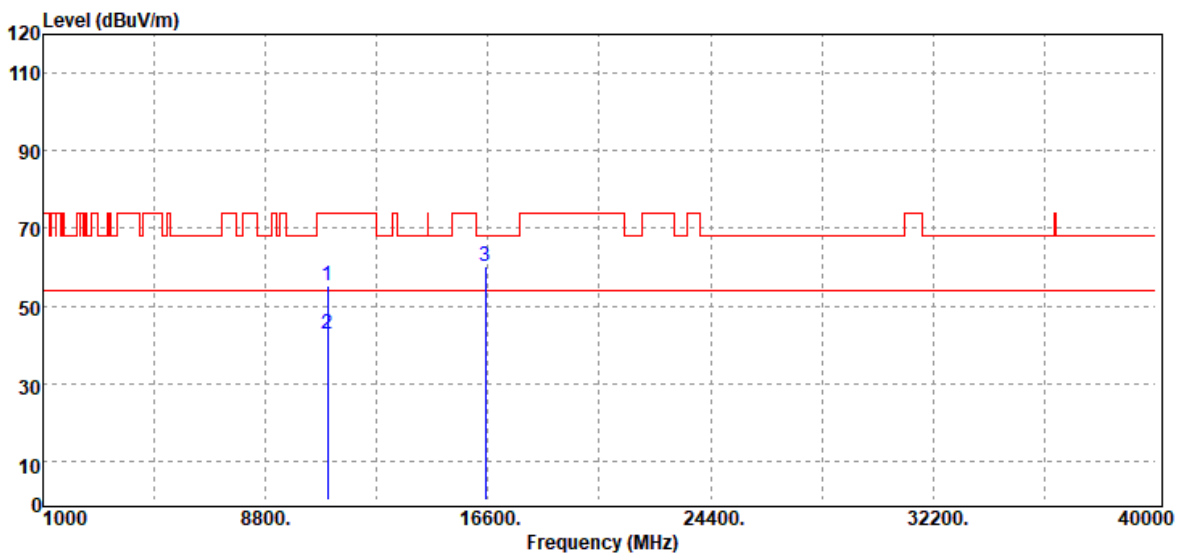


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10979.50	Peak	36.39	18.95	55.34	74.00	-18.66
10979.50	Average	23.87	18.95	42.82	54.00	-11.18
16500.00	Peak	30.99	29.02	60.01	68.20	-8.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

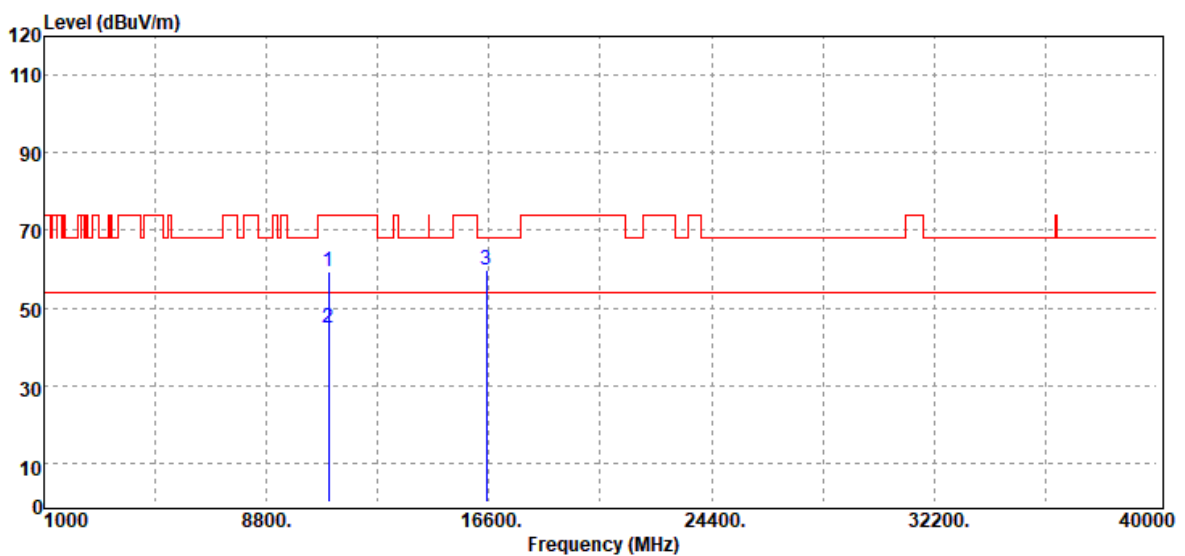


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10979.50	Peak	40.25	18.95	59.20	74.00	-14.80
10979.50	Average	26.09	18.95	45.04	54.00	-8.96
16500.00	Peak	30.76	29.02	59.78	68.20	-8.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

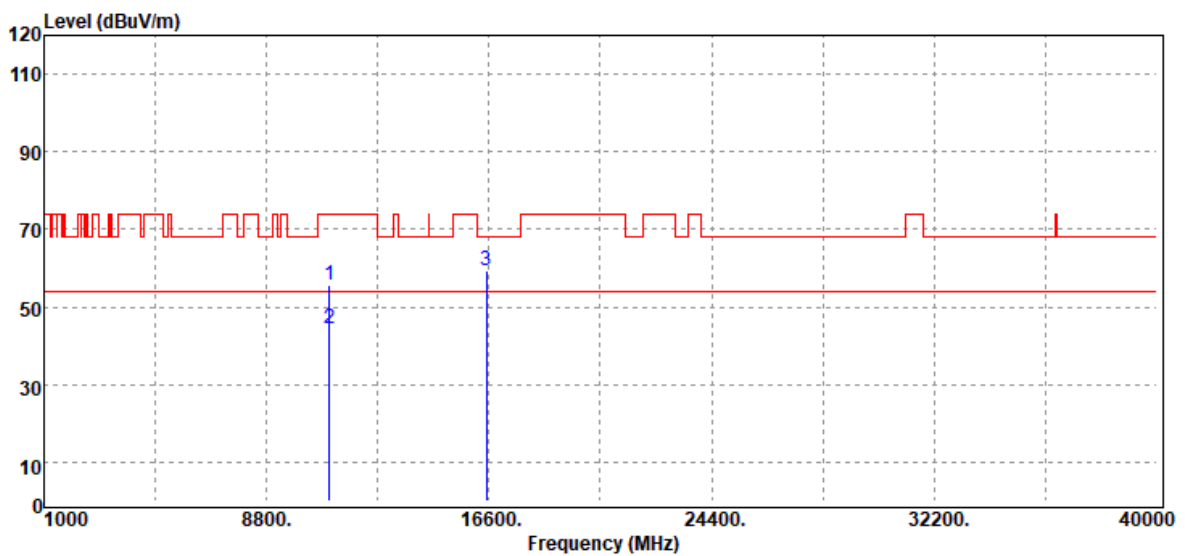


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	36.65	19.04	55.69	74.00	-18.31
11000.00	Average	25.22	19.04	44.26	54.00	-9.74
16500.00	Peak	30.15	29.02	59.17	68.20	-9.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

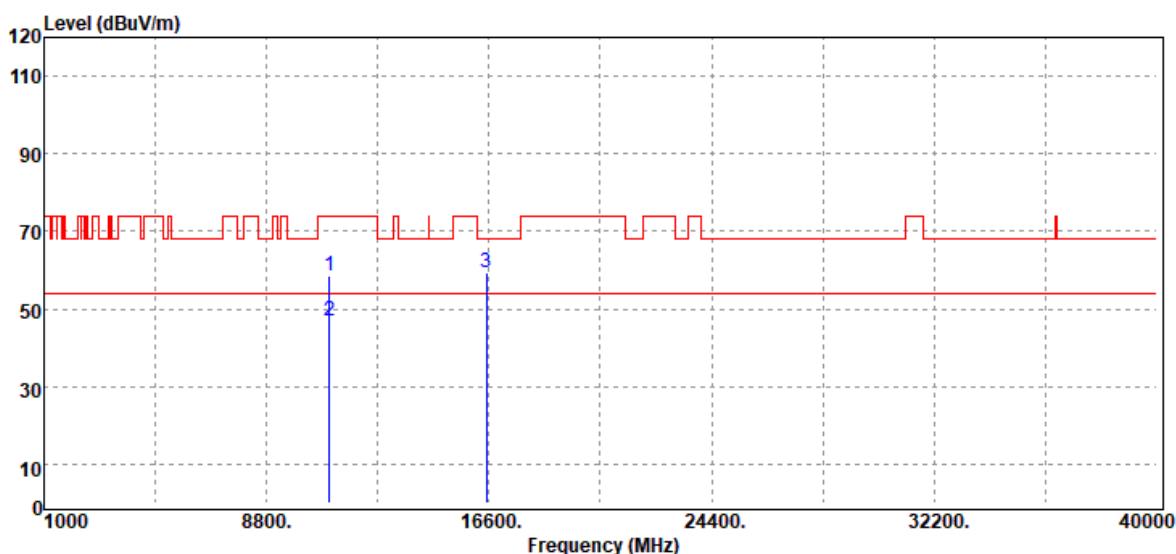


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11000.00	Peak	39.36	19.04	58.40	74.00	-15.60
11000.00	Average	27.74	19.04	46.78	54.00	-7.22
16500.00	Peak	30.28	29.02	59.30	68.20	-8.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5580 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

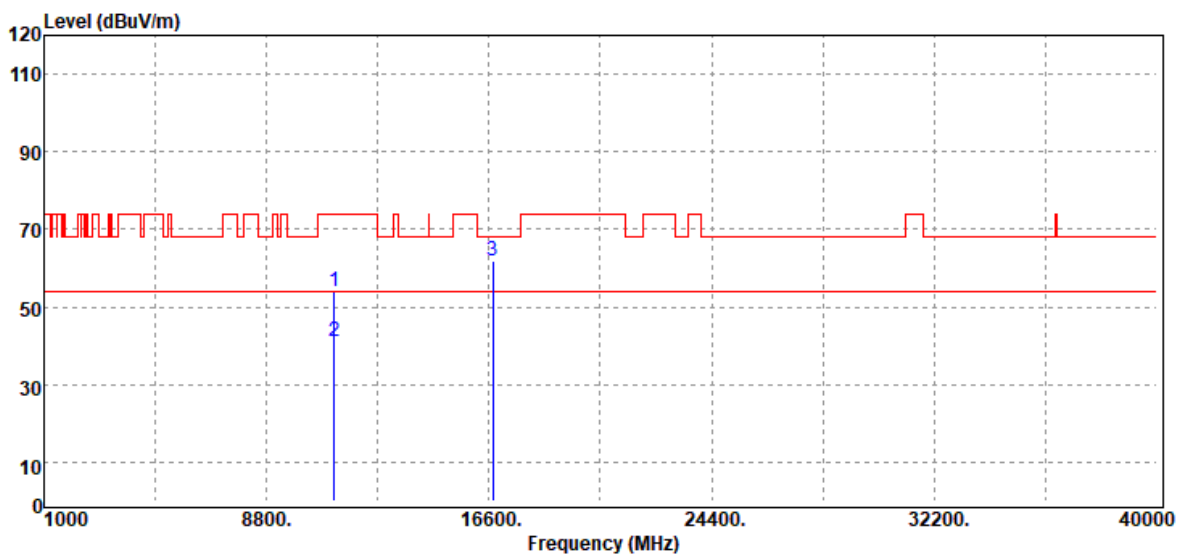


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	34.67	19.23	53.90	74.00	-20.10
11160.00	Average	21.67	19.23	40.90	54.00	-13.10
16740.00	Peak	31.62	30.21	61.83	68.20	-6.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5580 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

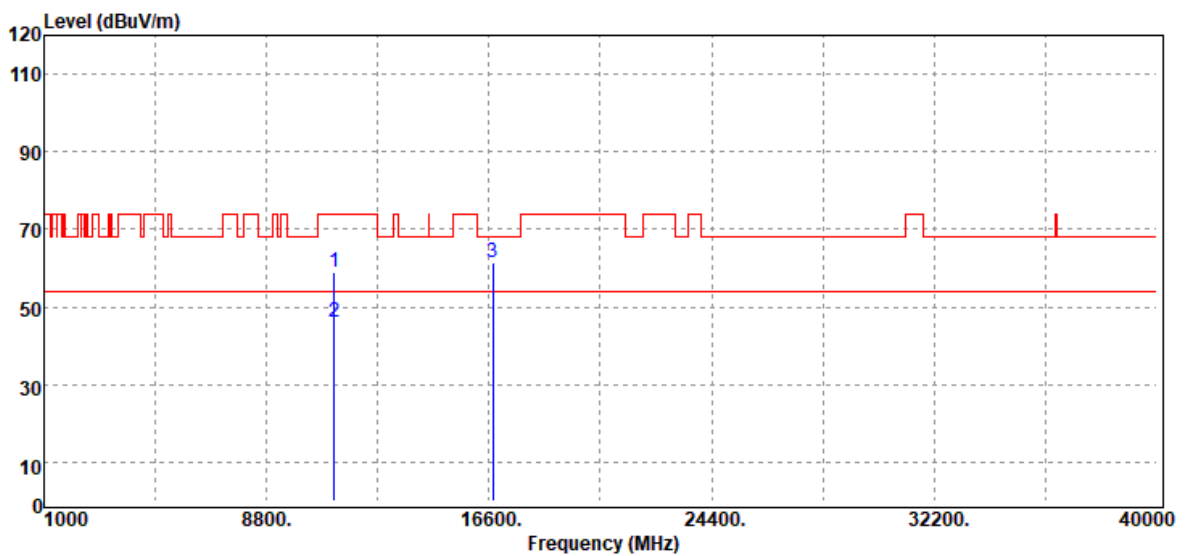


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11160.00	Peak	39.66	19.23	58.89	74.00	-15.11
11160.00	Average	26.84	19.23	46.07	54.00	-7.93
16740.00	Peak	31.33	30.21	61.54	68.20	-6.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

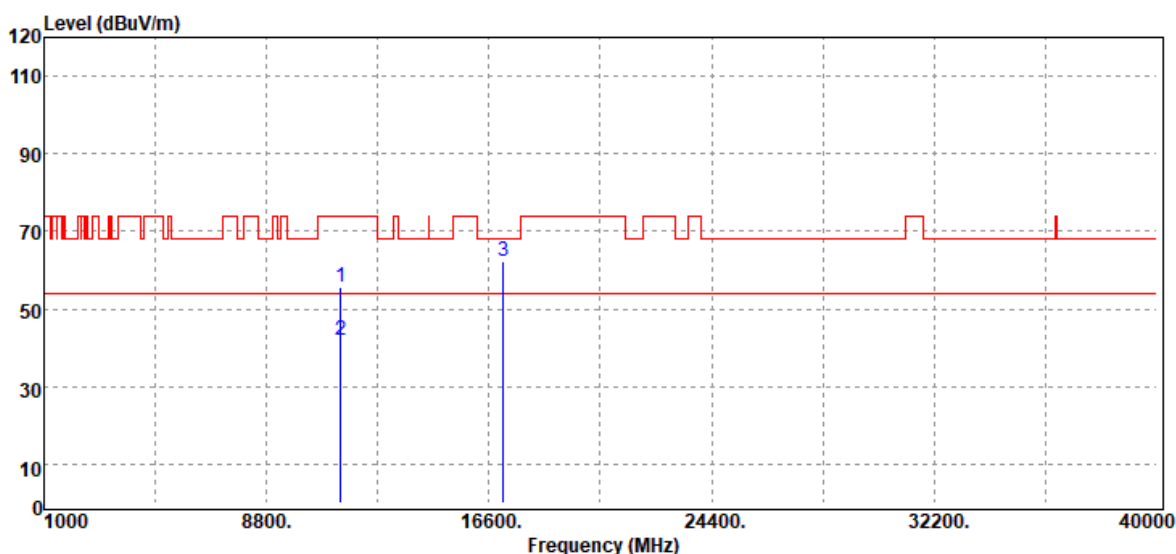


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	35.95	19.58	55.53	74.00	-18.47
11400.00	Average	22.18	19.58	41.76	54.00	-12.24
17100.00	Peak	31.11	31.23	62.34	68.20	-5.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

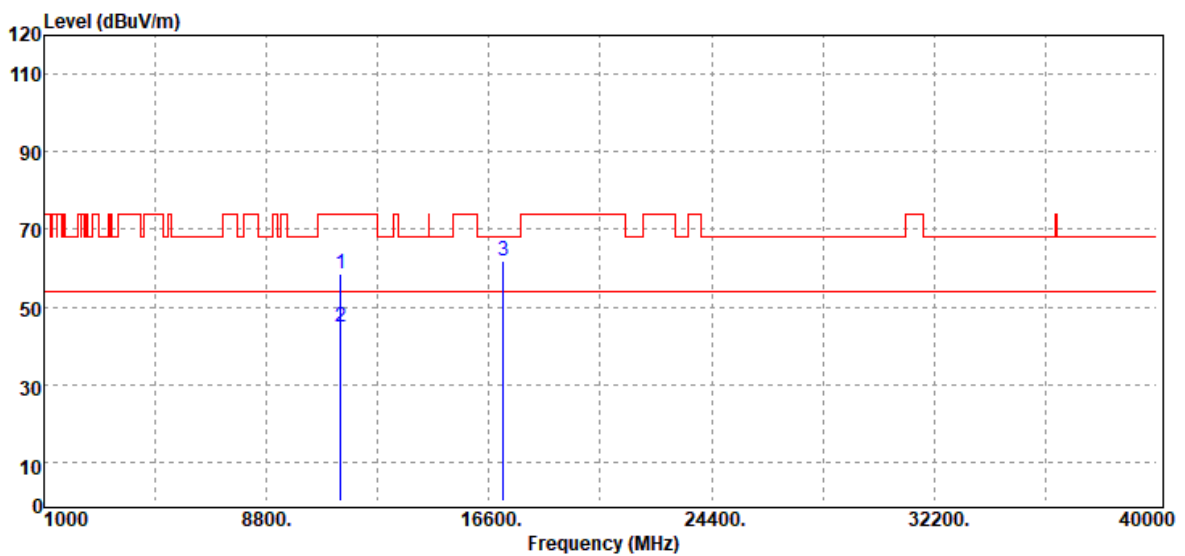


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	39.05	19.58	58.63	74.00	-15.37
11400.00	Average	25.26	19.58	44.84	54.00	-9.16
17100.00	Peak	30.74	31.23	61.97	68.20	-6.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

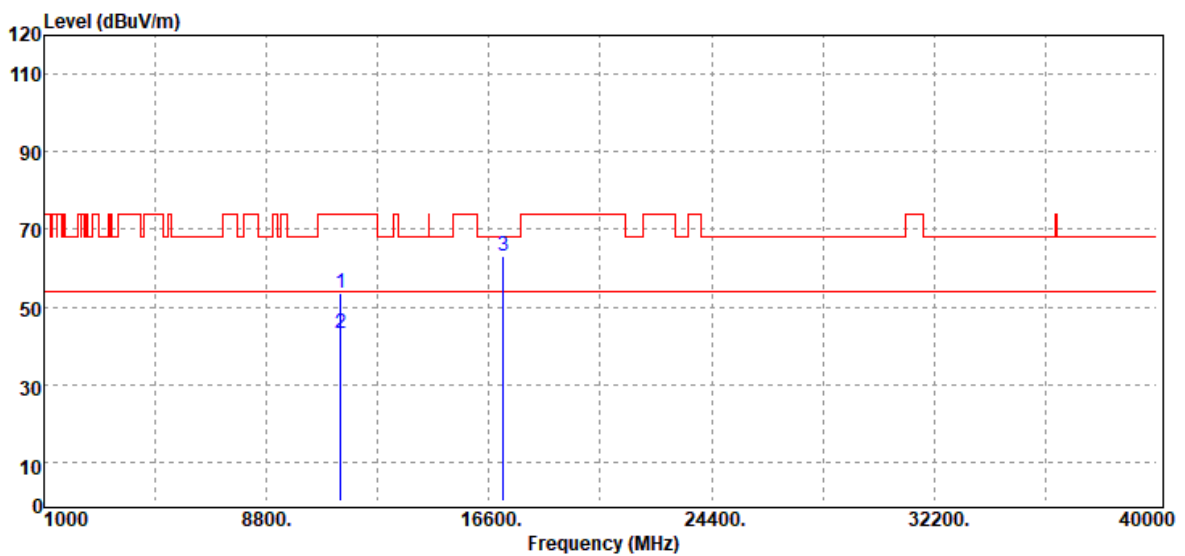

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	33.83	19.58	53.41	74.00	-20.59
11400.00	Average	23.62	19.58	43.20	54.00	-10.80
17100.00	Peak	31.90	31.23	63.13	68.20	-5.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	36.24	19.58	55.82	74.00	-18.18
11400.00	Average	24.72	19.58	44.30	54.00	-9.70
17100.00	Peak	30.92	31.23	62.15	68.20	-6.05
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

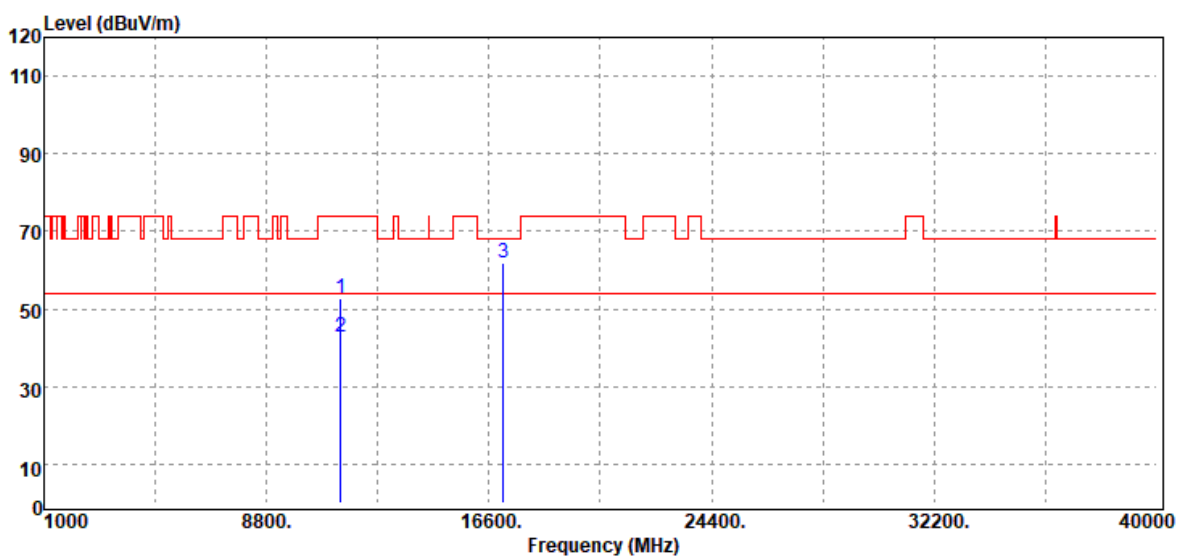


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	33.26	19.58	52.84	74.00	-21.16
11400.00	Average	23.10	19.58	42.68	54.00	-11.32
17100.00	Peak	30.84	31.23	62.07	68.20	-6.13
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

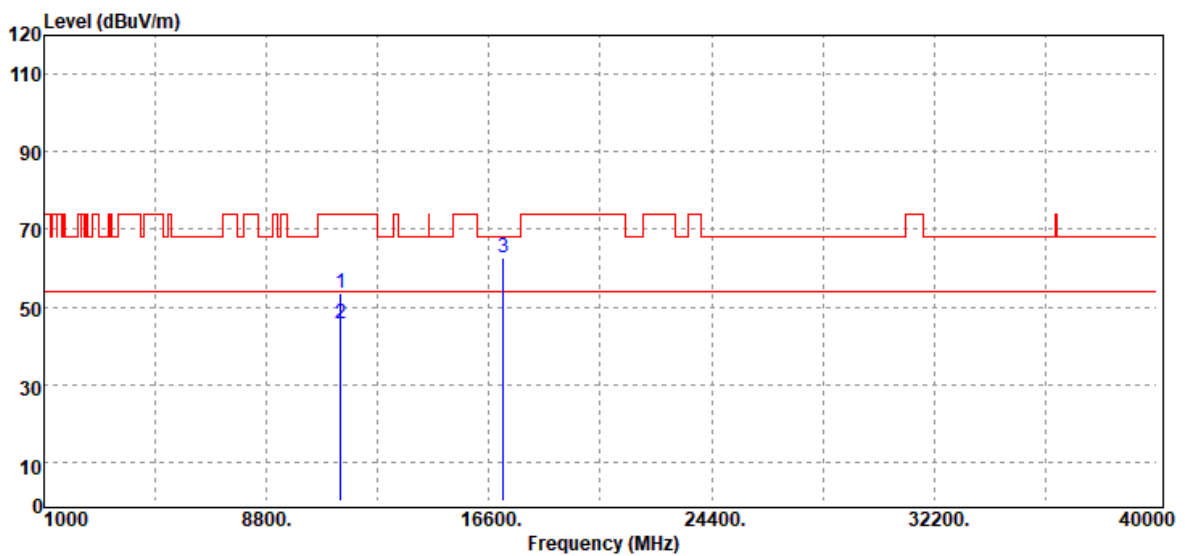

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	34.19	19.58	53.77	74.00	-20.23
11400.00	Average	26.16	19.58	45.74	54.00	-8.26
17100.00	Peak	31.38	31.23	62.61	68.20	-5.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11020.00	Peak	36.43	19.00	55.43	74.00	-18.57
11020.00	Average	21.88	19.00	40.88	54.00	-13.12
16530.00	Peak	30.93	28.97	59.90	68.20	-8.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

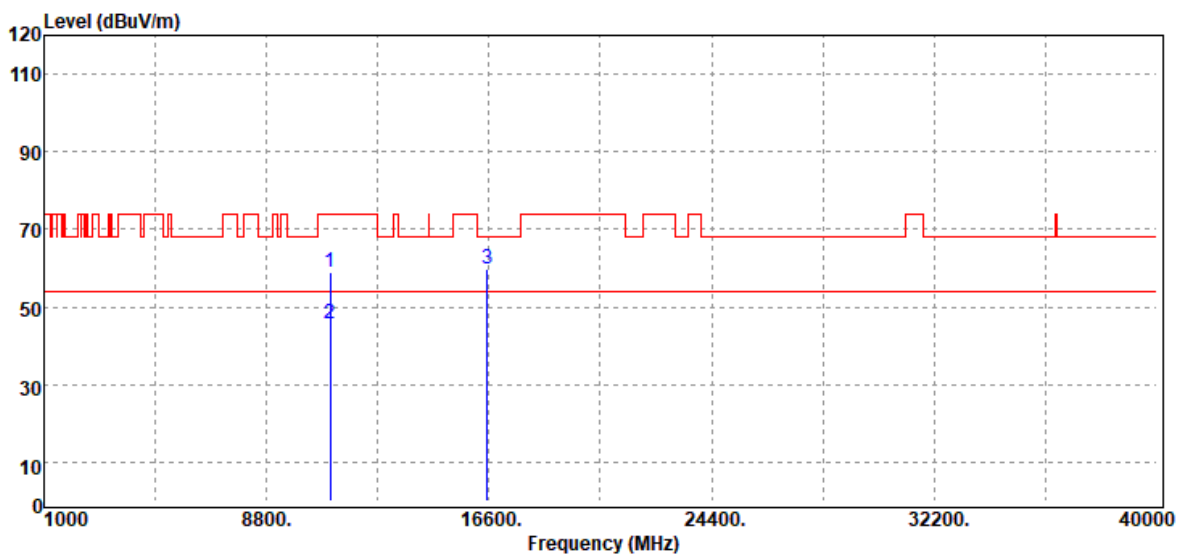


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11020.00	Peak	39.77	19.00	58.77	74.00	-15.23
11020.00	Average	26.88	19.00	45.88	54.00	-8.12
16530.00	Peak	30.96	28.97	59.93	68.20	-8.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5550 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

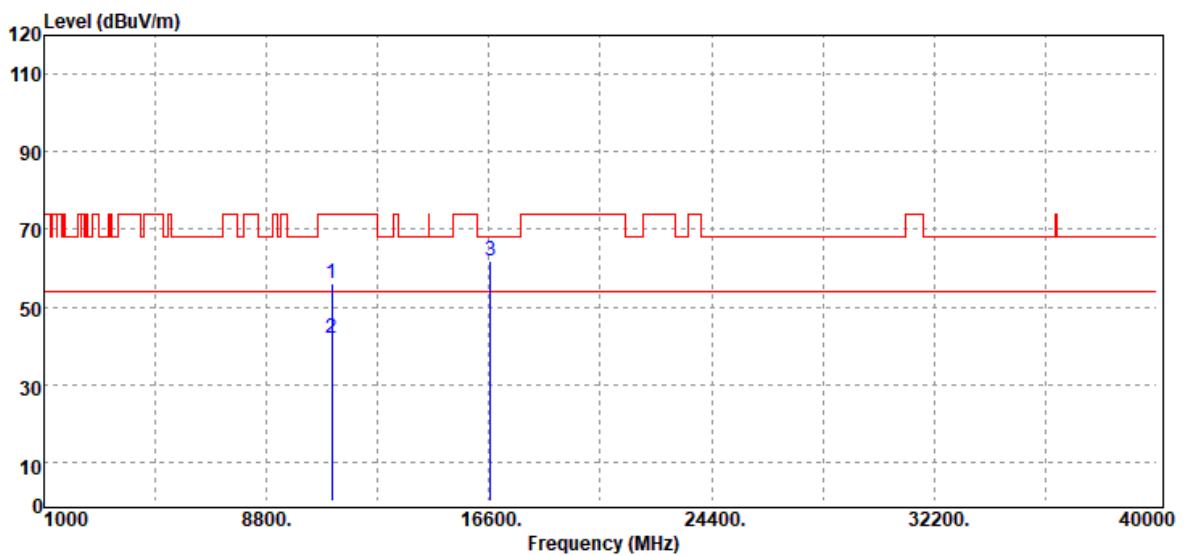


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	37.01	19.11	56.12	74.00	-17.88
11100.00	Average	22.85	19.11	41.96	54.00	-12.04
16650.00	Peak	32.38	29.28	61.66	68.20	-6.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5550 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

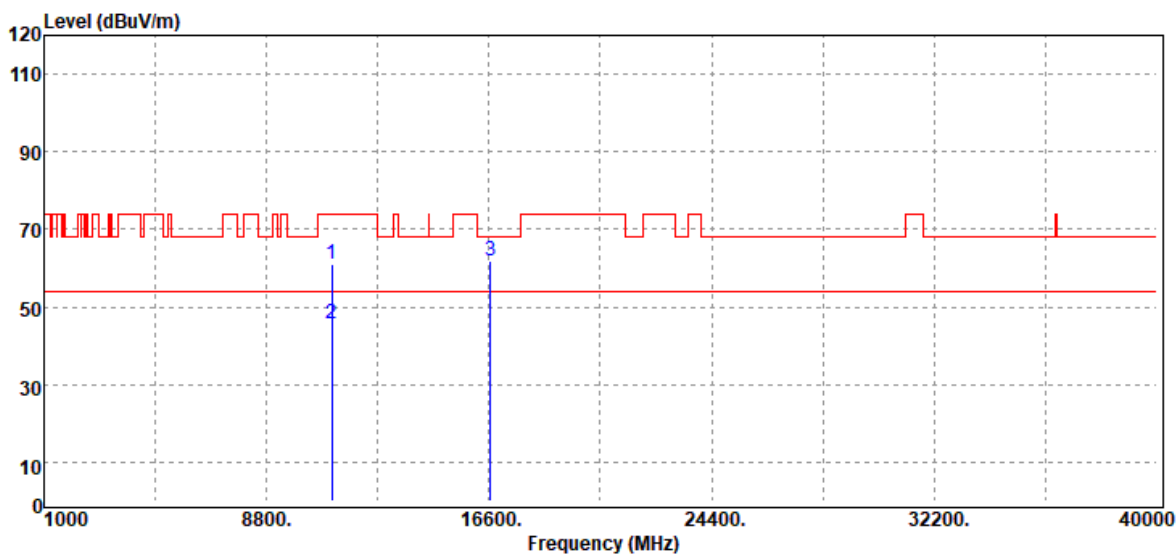


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11100.00	Peak	41.82	19.11	60.93	74.00	-13.07
11100.00	Average	26.60	19.11	45.71	54.00	-8.29
16650.00	Peak	32.43	29.28	61.71	68.20	-6.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

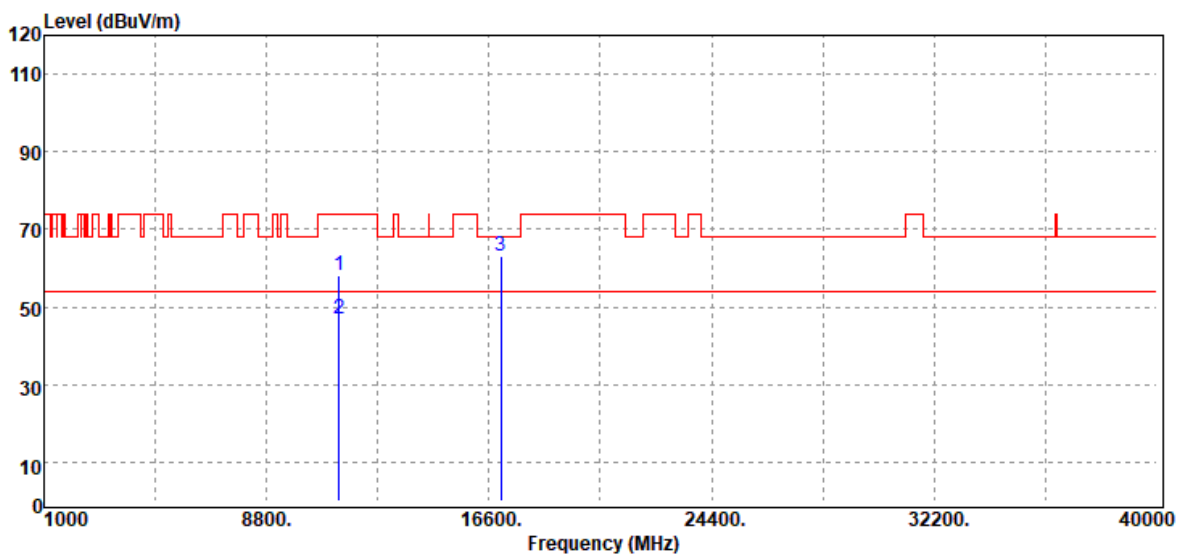


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11340.00	Peak	38.49	19.44	57.93	74.00	-16.07
11340.00	Average	27.31	19.44	46.75	54.00	-7.25
17010.00	Peak	31.64	31.47	63.11	68.20	-5.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

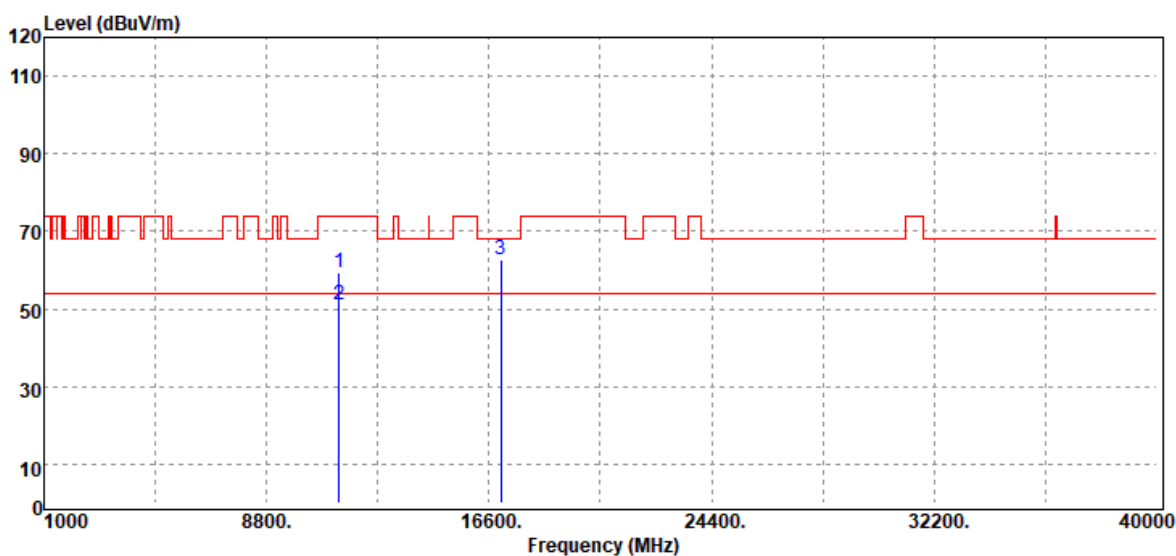


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	39.88	19.44	59.32	74.00	-14.68
11340.00	Average	31.64	19.44	51.08	54.00	-2.92
17010.00	Peak	31.24	31.47	62.71	68.20	-5.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

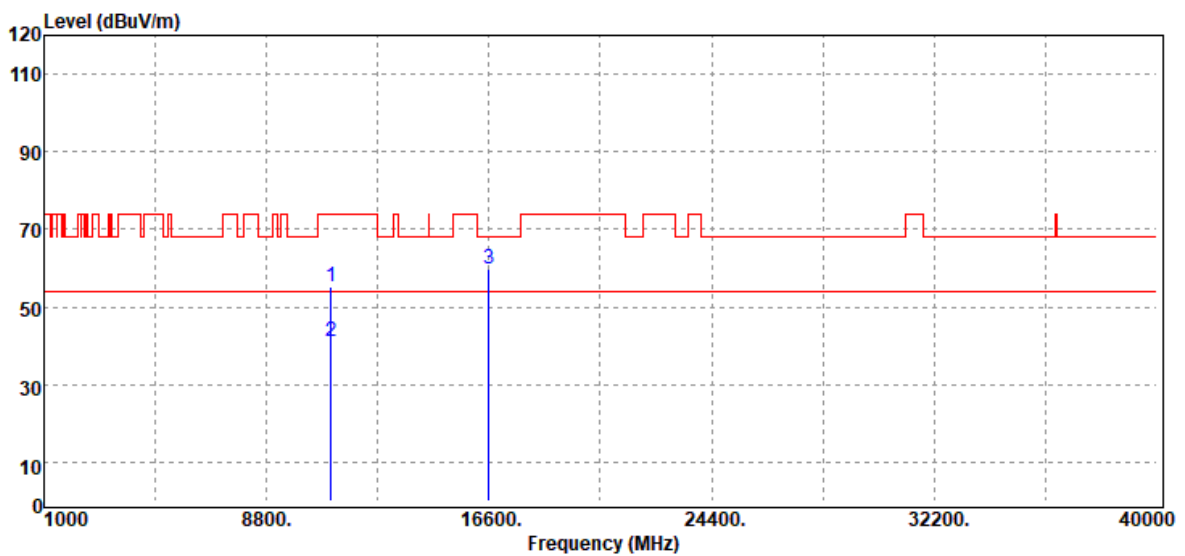


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11060.00	Peak	36.20	18.97	55.17	74.00	-18.83
11060.00	Average	22.03	18.97	41.00	54.00	-13.00
16590.00	Peak	30.75	28.94	59.69	68.20	-8.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

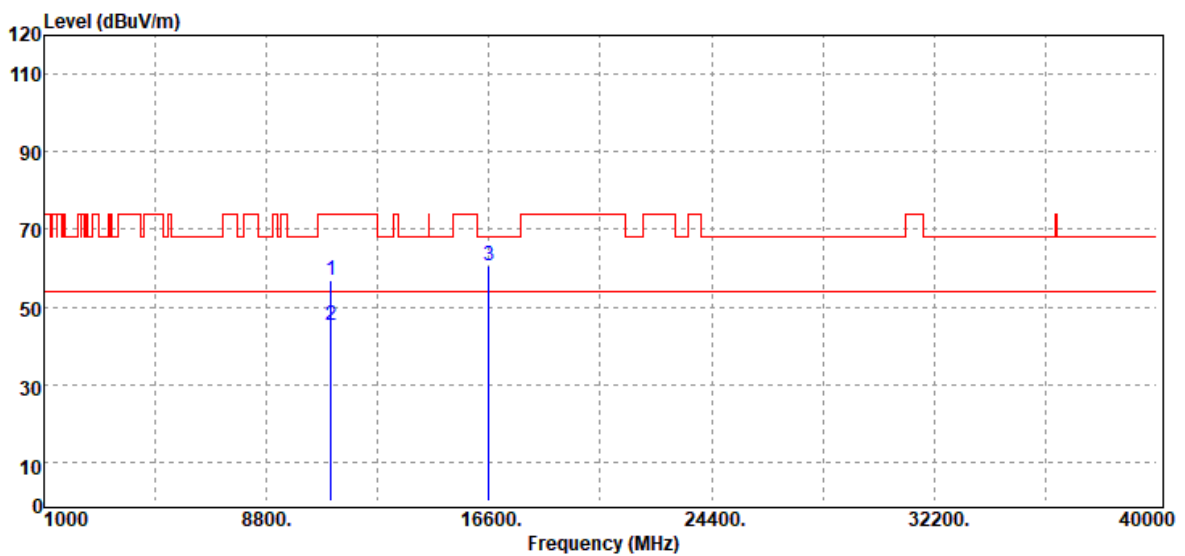

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	37.81	18.97	56.78	74.00	-17.22
11060.00	Average	26.34	18.97	45.31	54.00	-8.69
16590.00	Peak	31.65	28.94	60.59	68.20	-7.61
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Data for UNII-3 (Non-Beamforming Mode)

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.8(°C)/ 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

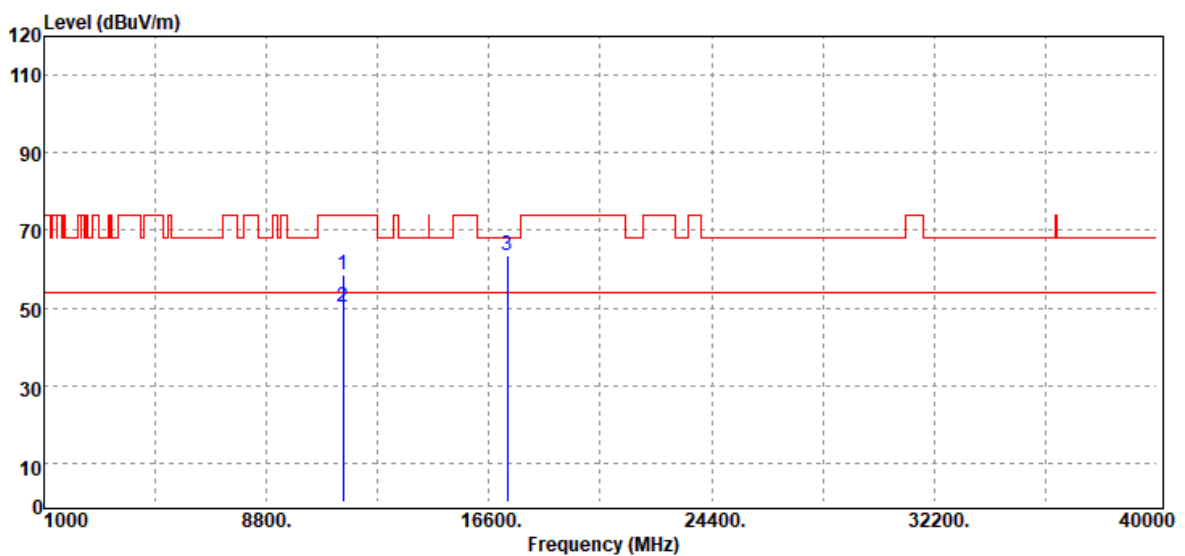


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	38.67	19.69	58.36	74.00	-15.64
11490.00	Average	30.72	19.69	50.41	54.00	-3.59
17235.00	Peak	33.62	30.02	63.64	68.20	-4.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

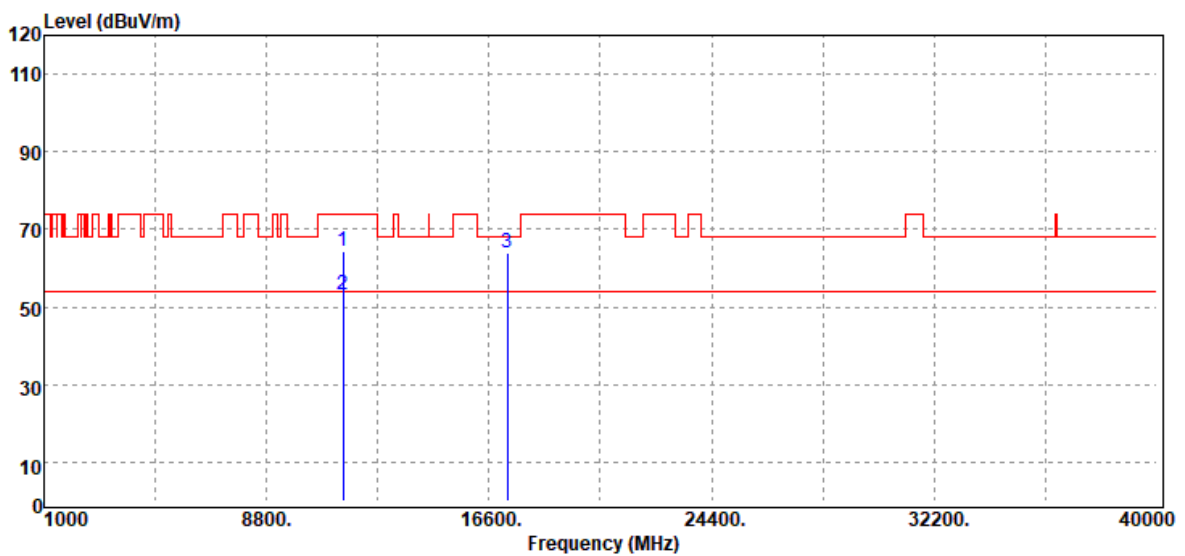


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	44.77	19.69	64.46	74.00	-9.54
11490.00	Average	33.53	19.69	53.22	54.00	-0.78
17235.00	Peak	33.79	30.02	63.81	68.20	-4.39
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

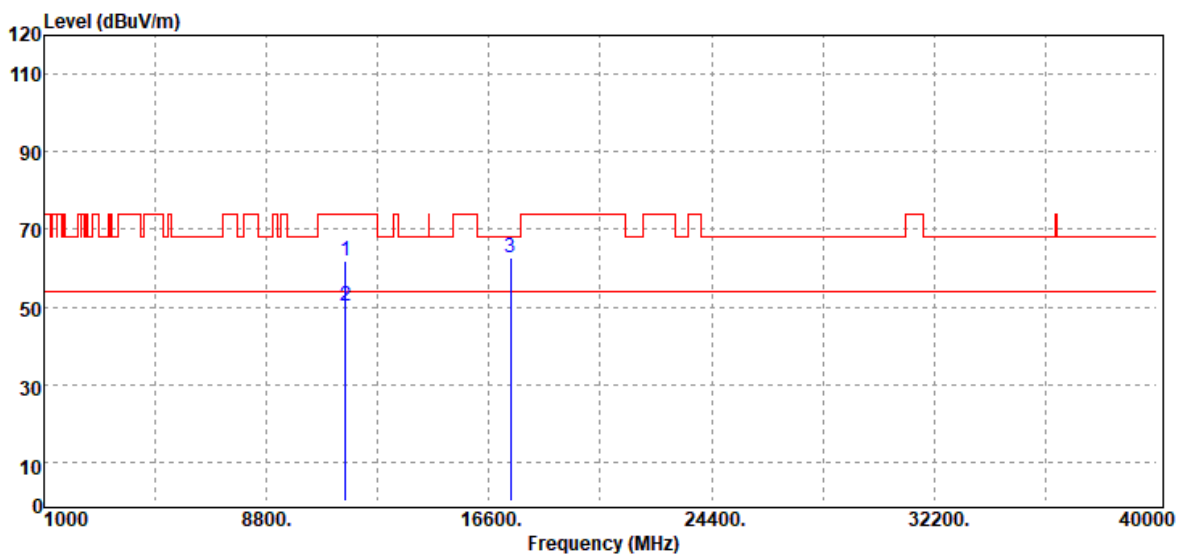


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	42.06	19.83	61.89	74.00	-12.11
11570.00	Average	30.28	19.83	50.11	54.00	-3.89
17355.00	Peak	33.29	29.34	62.63	68.20	-5.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

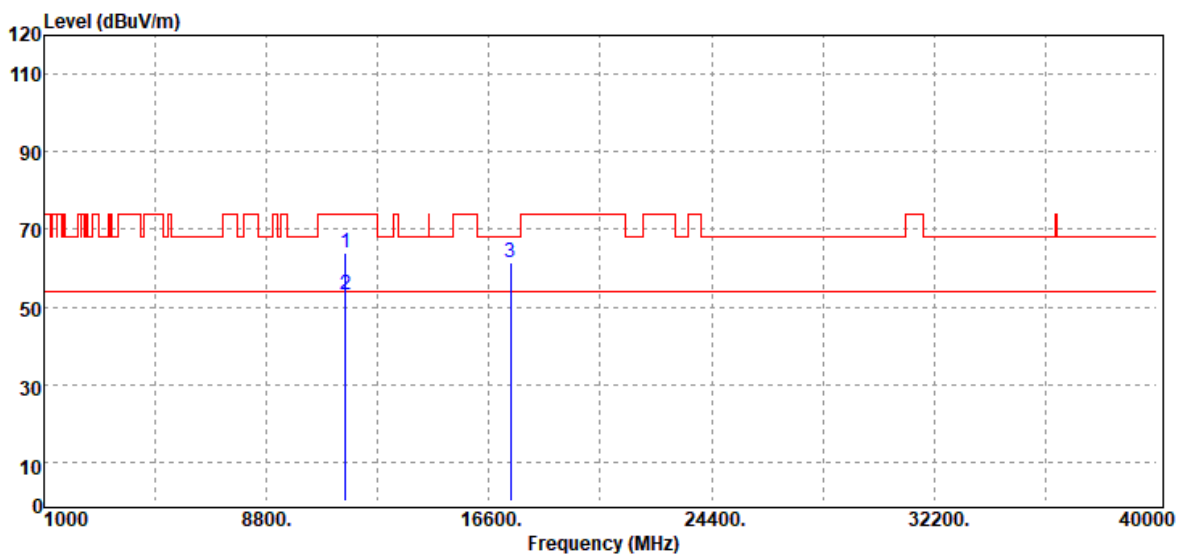

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	44.06	19.83	63.89	74.00	-10.11
11570.00	Average	33.32	19.83	53.15	54.00	-0.85
17355.00	Peak	32.10	29.34	61.44	68.20	-6.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11650.00	Peak	42.00	19.90	61.90	74.00	-12.10
11650.00	Average	30.37	19.90	50.27	54.00	-3.73
17475.00	Peak	33.01	29.11	62.12	68.20	-6.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.8(°C) / 57%RH
Test Item	Harmonic	Test Date	November 18, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

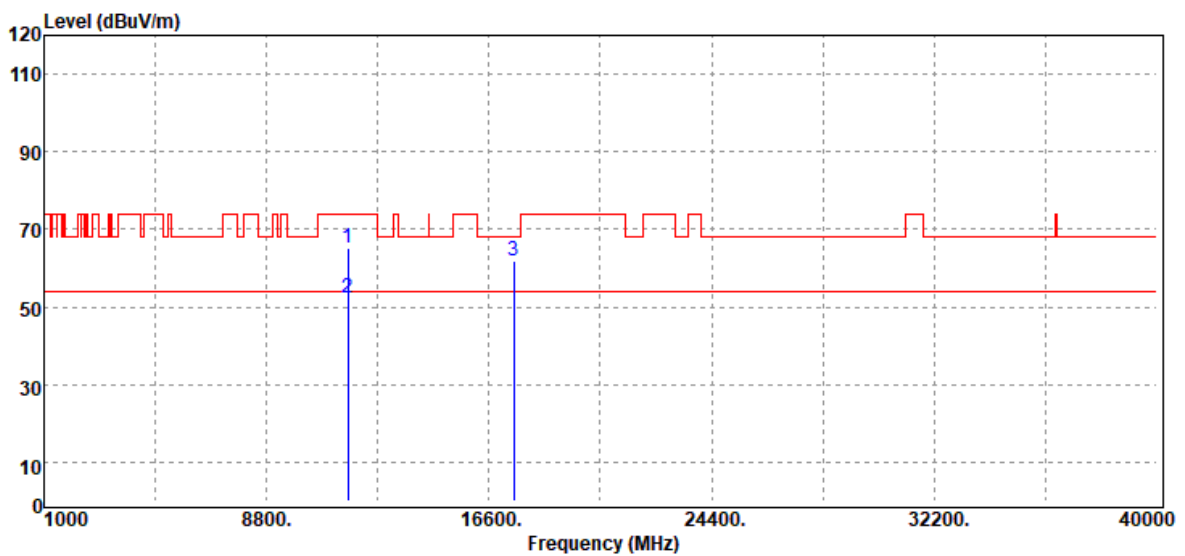


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	45.46	19.90	65.36	74.00	-8.64
11650.00	Average	32.41	19.90	52.31	54.00	-1.69
17475.00	Peak	32.87	29.11	61.98	68.20	-6.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n 20 / 5745 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

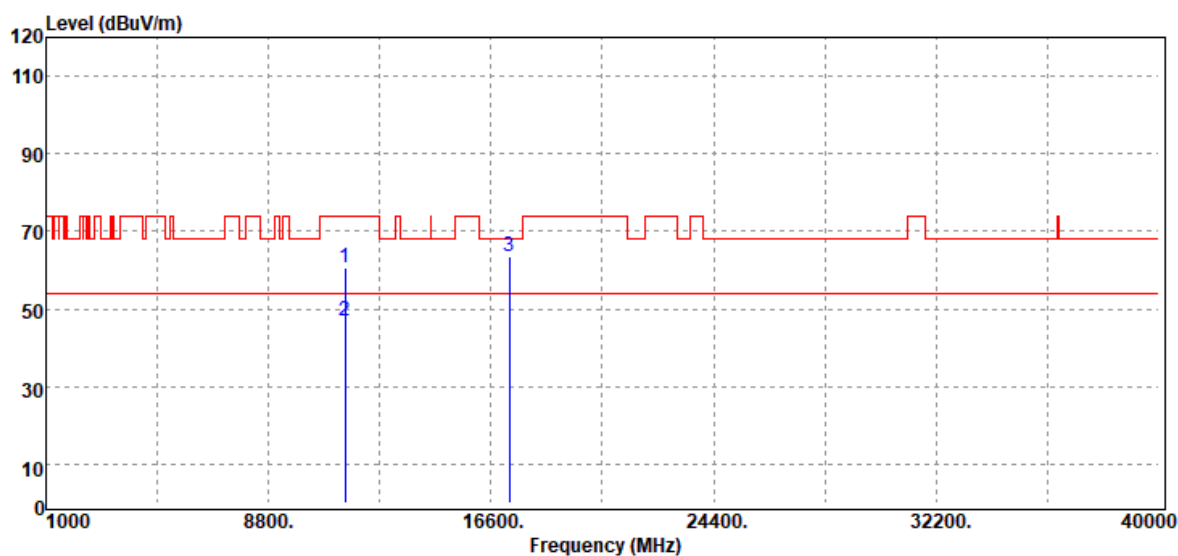


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	40.79	19.69	60.48	74.00	-13.52
11490.00	Average	27.25	19.69	46.94	54.00	-7.06
17235.00	Peak	33.37	30.02	63.39	68.20	-4.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5745 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

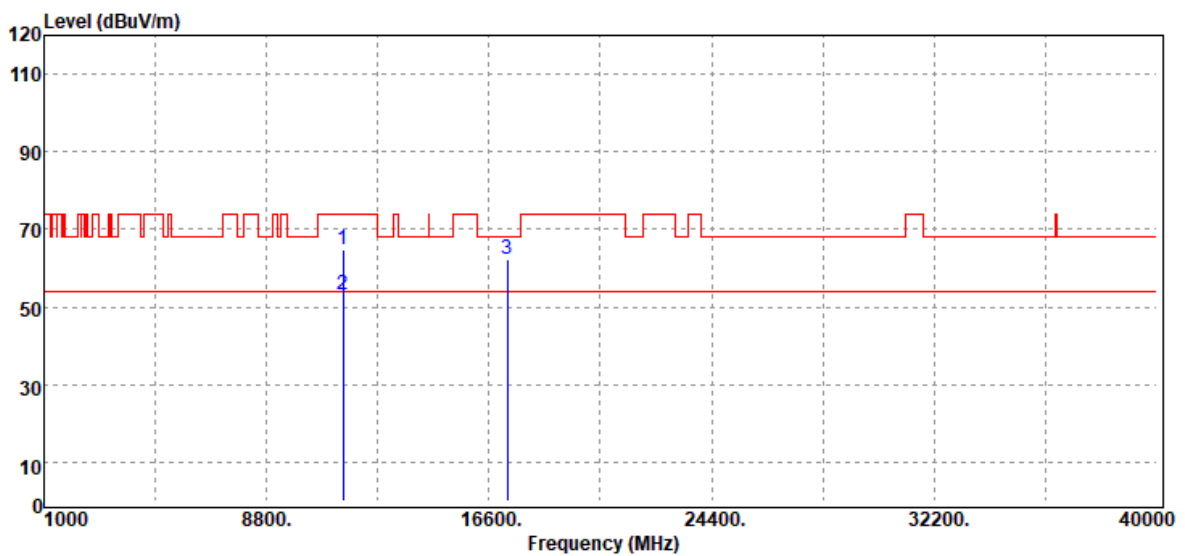


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	45.20	19.69	64.89	74.00	-9.11
11490.00	Average	33.32	19.69	53.01	54.00	-0.99
17235.00	Peak	32.44	30.02	62.46	68.20	-5.74
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

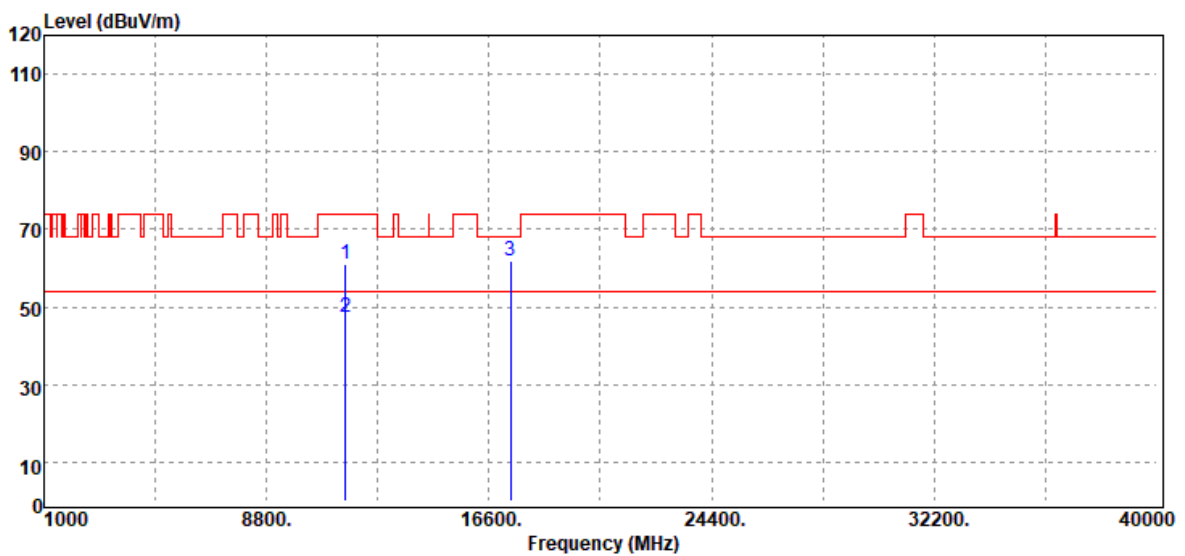


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	41.35	19.83	61.18	74.00	-12.82
11570.00	Average	27.43	19.83	47.26	54.00	-6.74
17355.00	Peak	32.62	29.34	61.96	68.20	-6.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

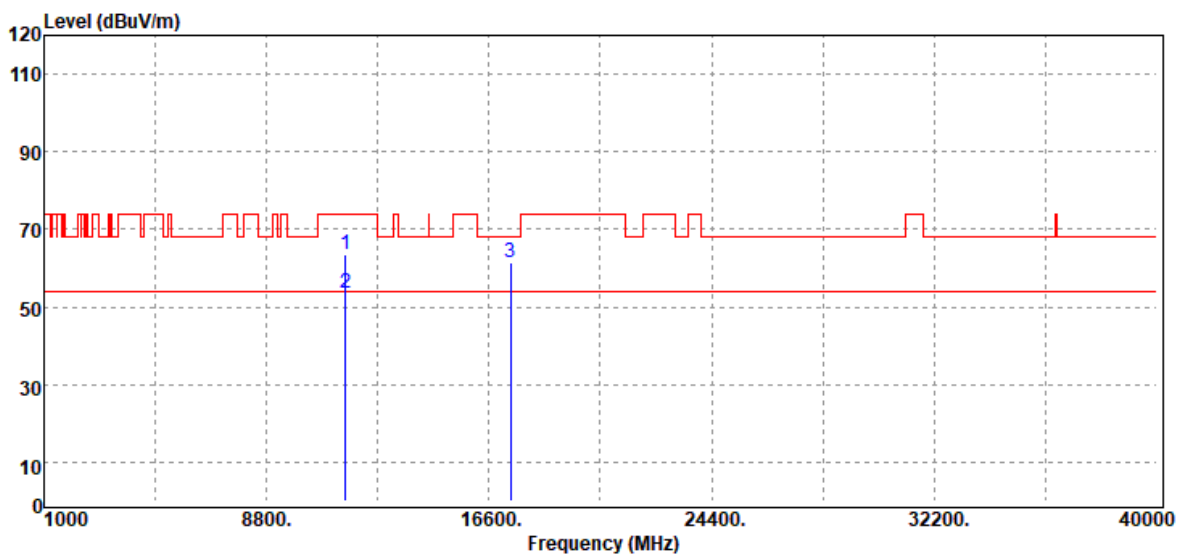


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	43.71	19.83	63.54	74.00	-10.46
11570.00	Average	33.71	19.83	53.54	54.00	-0.46
17355.00	Peak	32.16	29.34	61.50	68.20	-6.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

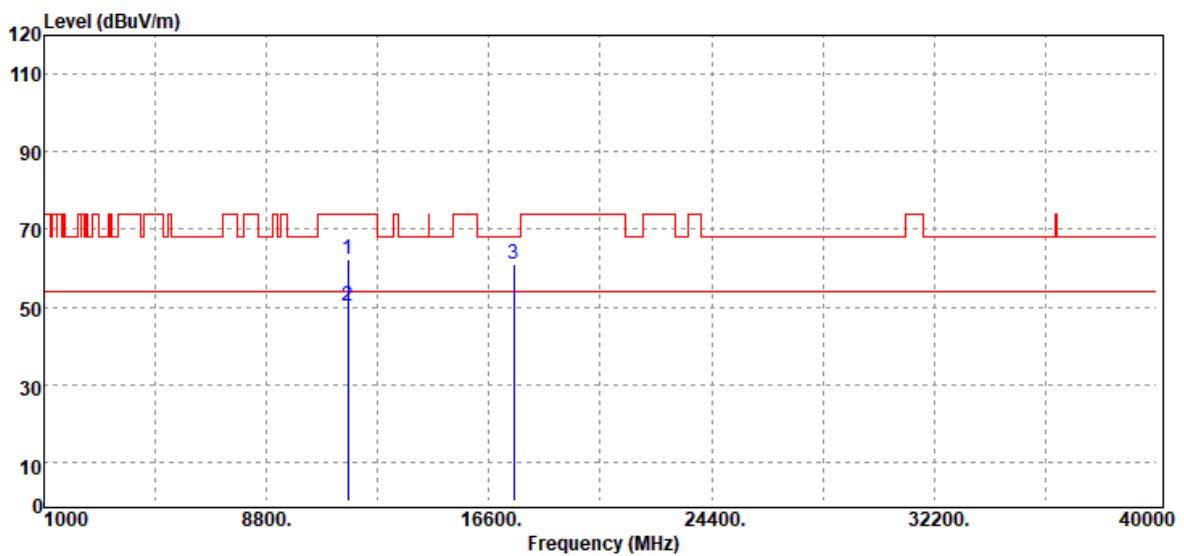


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	42.36	19.90	62.26	74.00	-11.74
11650.00	Average	30.35	19.90	50.25	54.00	-3.75
17475.00	Peak	31.99	29.11	61.10	68.20	-7.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

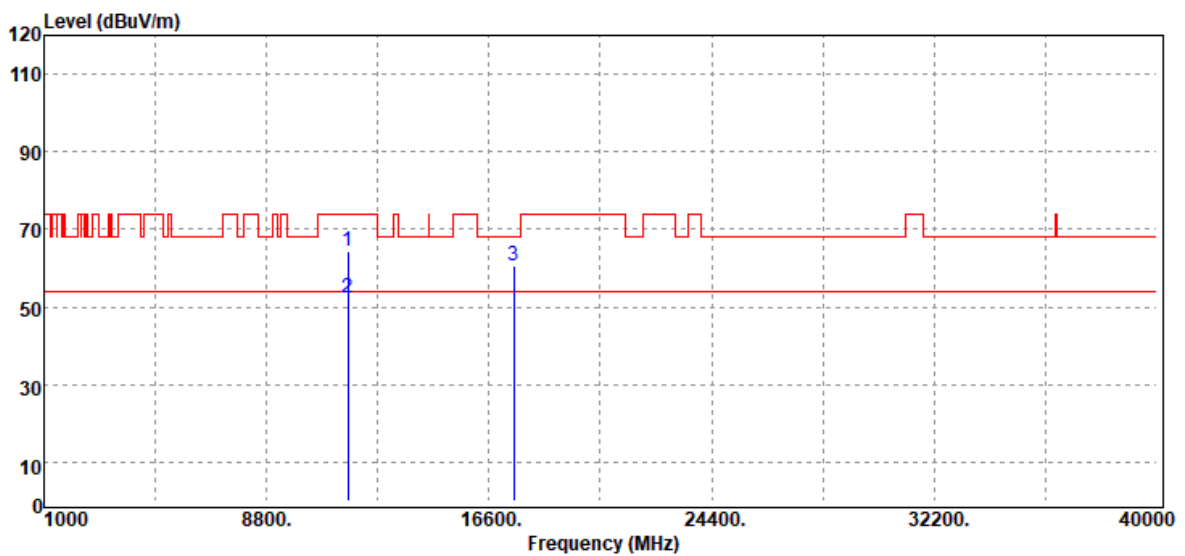


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	44.57	19.90	64.47	74.00	-9.53
11650.00	Average	32.27	19.90	52.17	54.00	-1.83
17475.00	Peak	31.60	29.11	60.71	68.20	-7.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

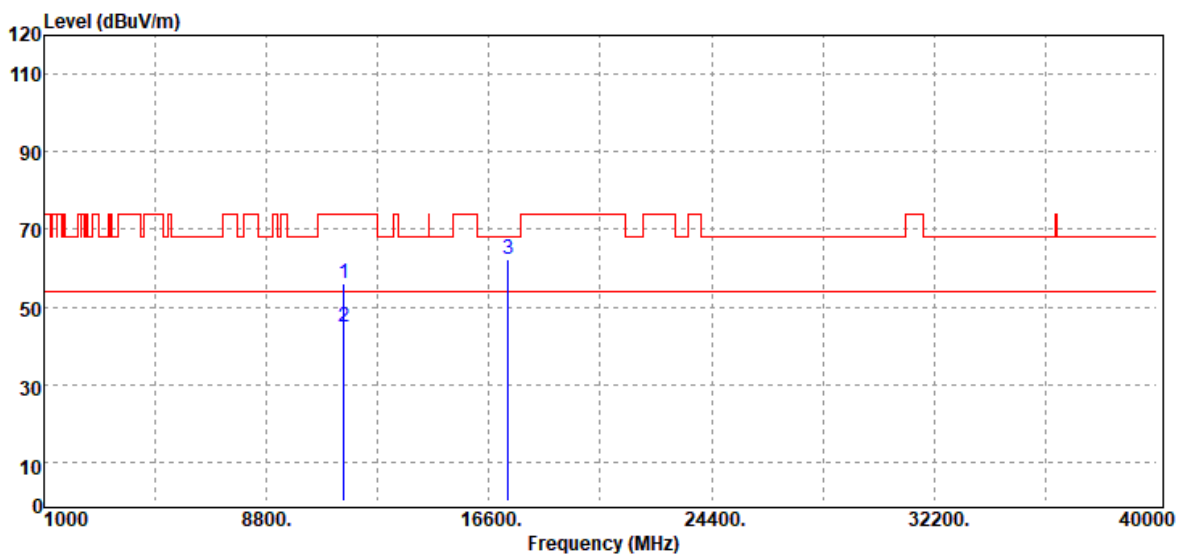


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	36.15	19.72	55.87	74.00	-18.13
11510.00	Average	25.30	19.72	45.02	54.00	-8.98
17265.00	Peak	32.58	29.80	62.38	68.20	-5.82
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

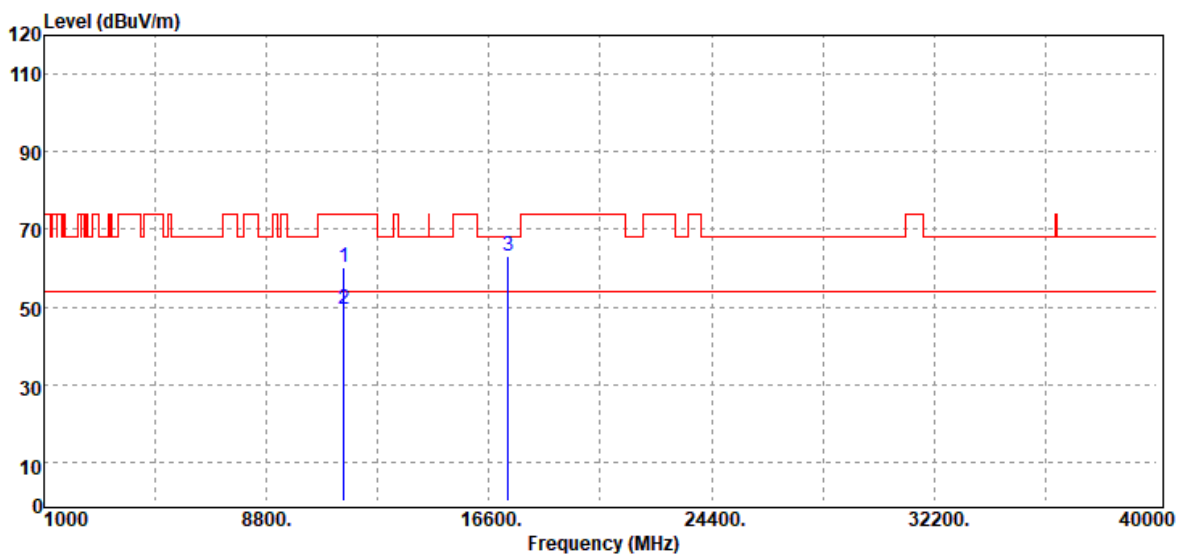


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	40.56	19.72	60.28	74.00	-13.72
11510.00	Average	29.64	19.72	49.36	54.00	-4.64
17265.00	Peak	33.13	29.80	62.93	68.20	-5.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

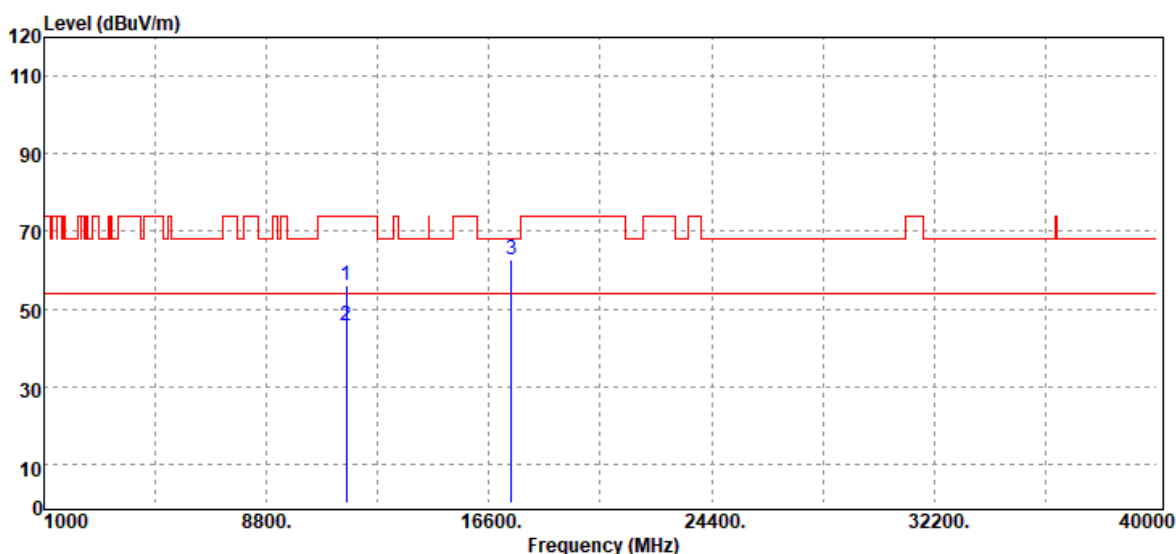


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	36.17	19.87	56.04	74.00	-17.96
11590.00	Average	25.61	19.87	45.48	54.00	-8.52
17385.00	Peak	33.35	29.24	62.59	68.20	-5.61
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	21.4(°C) / 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

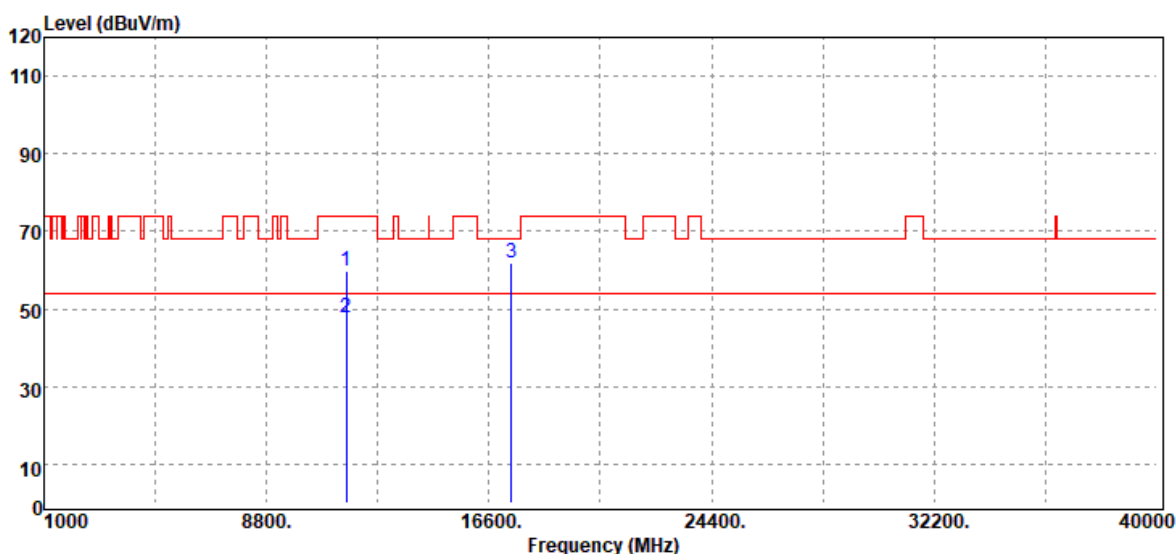


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	40.10	19.87	59.97	74.00	-14.03
11590.00	Average	27.90	19.87	47.77	54.00	-6.23
17385.00	Peak	32.64	29.24	61.88	68.20	-6.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

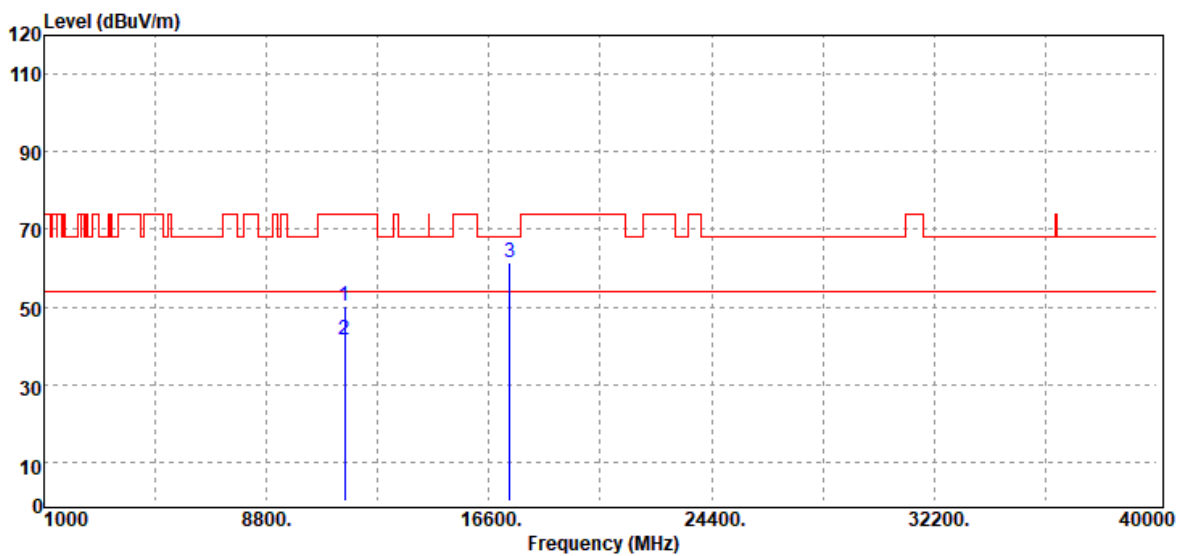

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	30.47	19.80	50.27	74.00	-23.73
11550.00	Average	21.74	19.80	41.54	54.00	-12.46
17325.00	Peak	31.91	29.48	61.39	68.20	-6.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	29.94	19.80	49.74	74.00	-24.26
11550.00	Average	22.20	19.80	42.00	54.00	-12.00
17325.00	Peak	31.85	29.48	61.33	68.20	-6.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

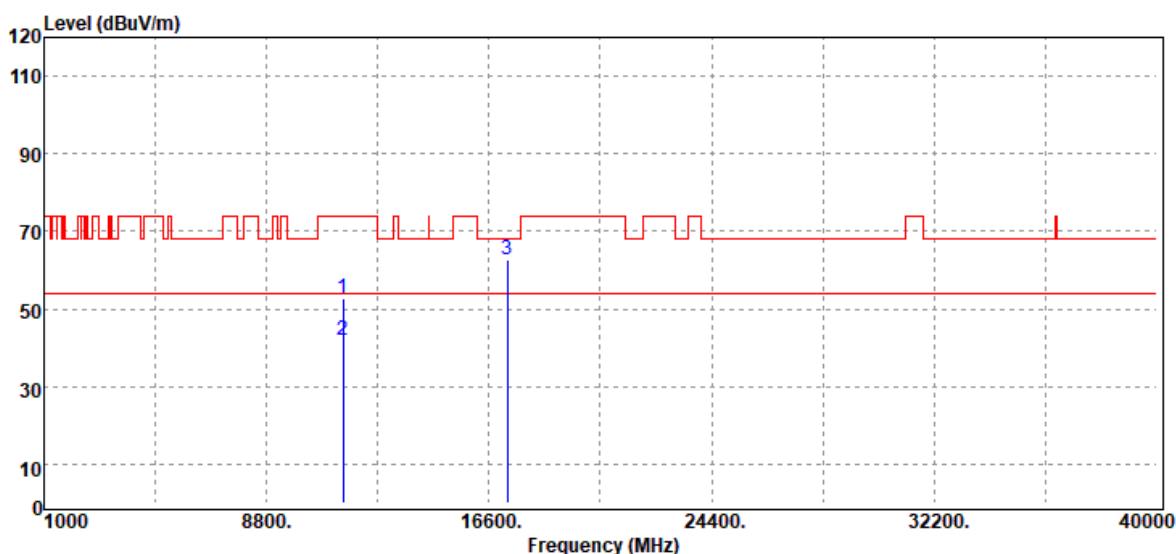


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	33.04	19.69	52.73	74.00	-21.27
11490.00	Average	22.05	19.69	41.74	54.00	-12.26
17235.00	Peak	32.66	30.02	62.68	68.20	-5.52
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

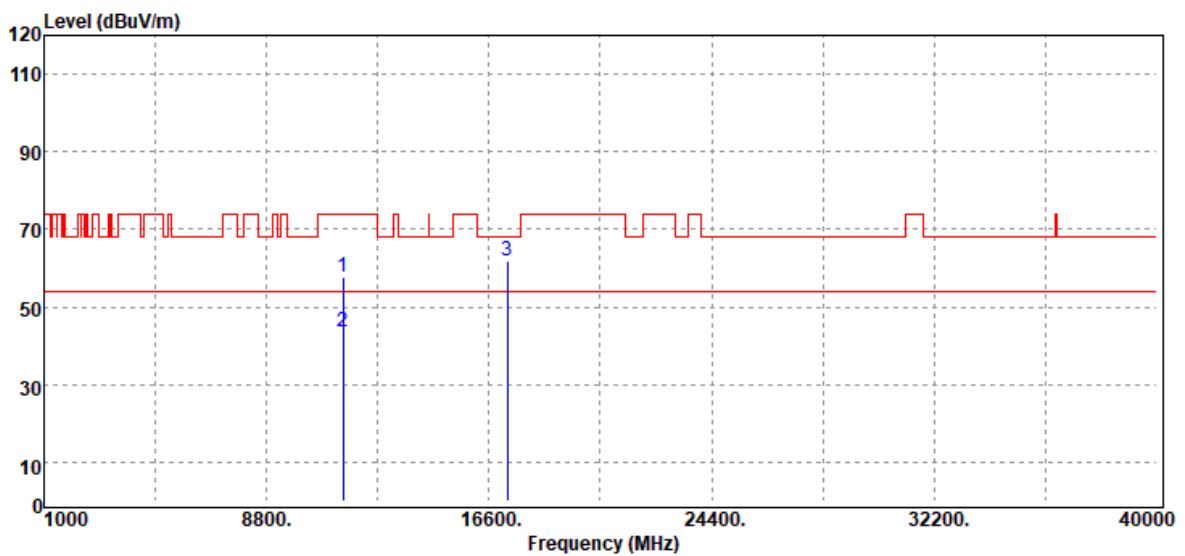

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	37.88	19.69	57.57	74.00	-16.43
11490.00	Average	23.86	19.69	43.55	54.00	-10.45
17235.00	Peak	31.87	30.02	61.89	68.20	-6.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	34.65	19.69	54.34	74.00	-19.66
11490.00	Average	21.79	19.69	41.48	54.00	-12.52
17235.00	Peak	32.61	30.02	62.63	68.20	-5.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

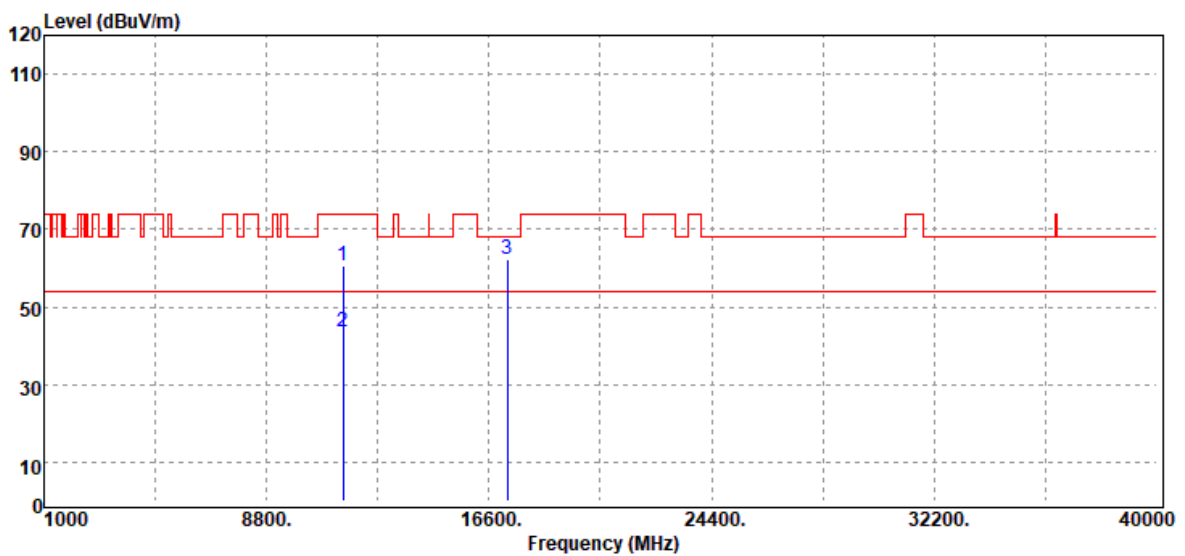


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	41.07	19.69	60.76	74.00	-13.24
11490.00	Average	23.97	19.69	43.66	54.00	-10.34
17235.00	Peak	32.31	30.02	62.33	68.20	-5.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

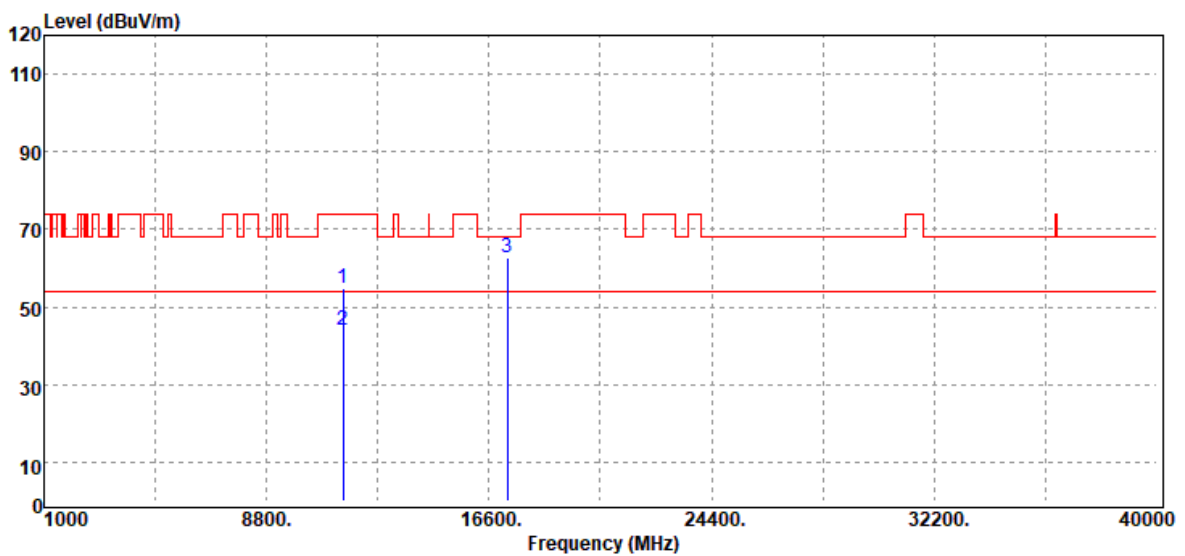


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	35.18	19.69	54.87	74.00	-19.13
11490.00	Average	24.45	19.69	44.14	54.00	-9.86
17235.00	Peak	32.53	30.02	62.55	68.20	-5.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

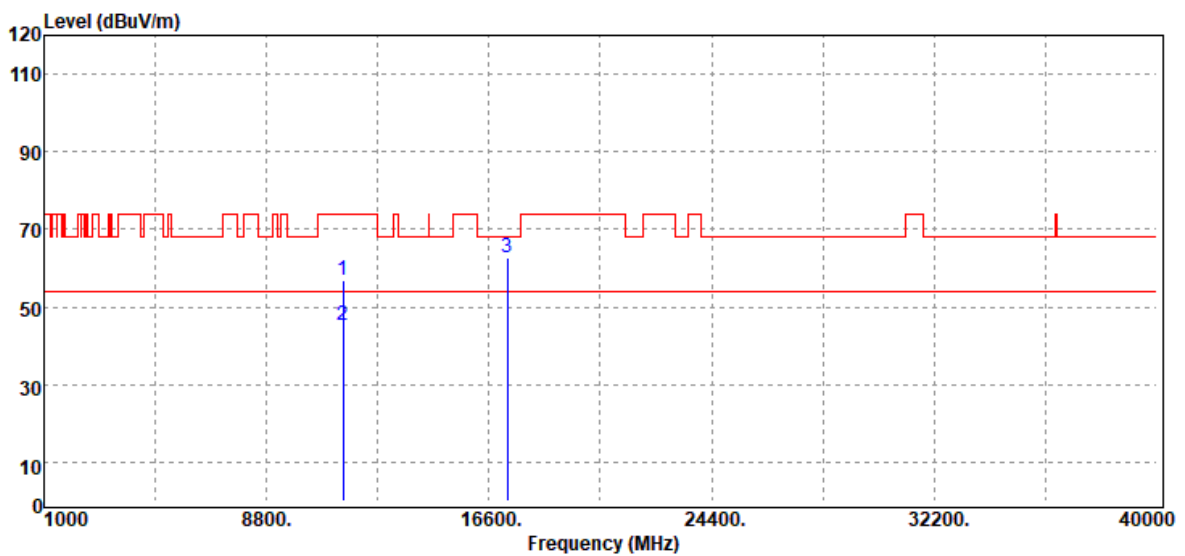


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	37.10	19.69	56.79	74.00	-17.21
11490.00	Average	25.64	19.69	45.33	54.00	-8.67
17235.00	Peak	32.53	30.02	62.55	68.20	-5.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5785MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

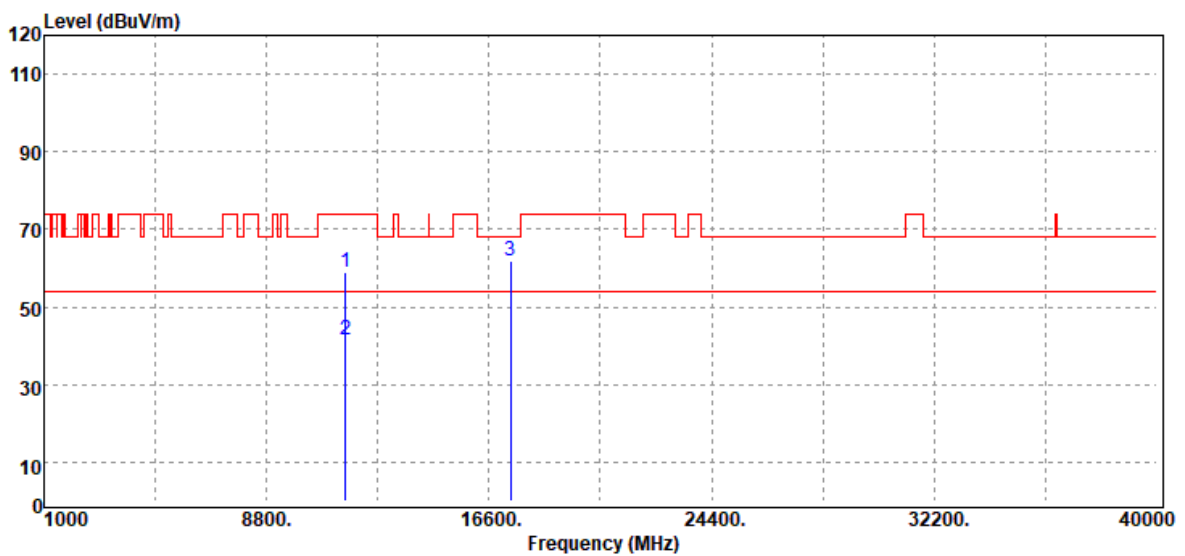

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	39.13	19.83	58.96	74.00	-15.04
11570.00	Average	21.73	19.83	41.56	54.00	-12.44
17355.00	Peak	32.44	29.34	61.78	68.20	-6.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5785MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	40.63	19.83	60.46	74.00	-13.54
11570.00	Average	25.65	19.83	45.48	54.00	-8.52
17355.00	Peak	33.83	29.34	63.17	68.20	-5.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

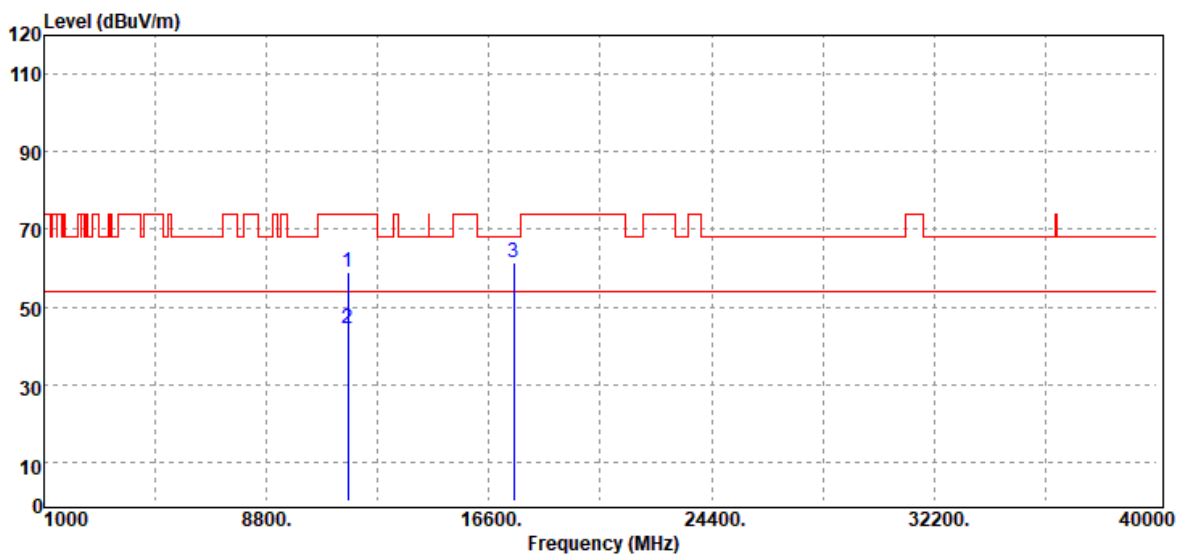

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	39.07	19.90	58.97	74.00	-15.03
11650.00	Average	24.68	19.90	44.58	54.00	-9.42
17475.00	Peak	32.34	29.11	61.45	68.20	-6.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	41.46	19.90	61.36	74.00	-12.64
11650.00	Average	25.27	19.90	45.17	54.00	-8.83
17475.00	Peak	31.26	29.11	60.37	68.20	-7.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.00	Peak	38.81	19.90	58.71	74.00	-15.29
11650.00	Average	25.40	19.90	45.30	54.00	-8.70
17475.00	Peak	32.57	29.11	61.68	68.20	-6.52
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

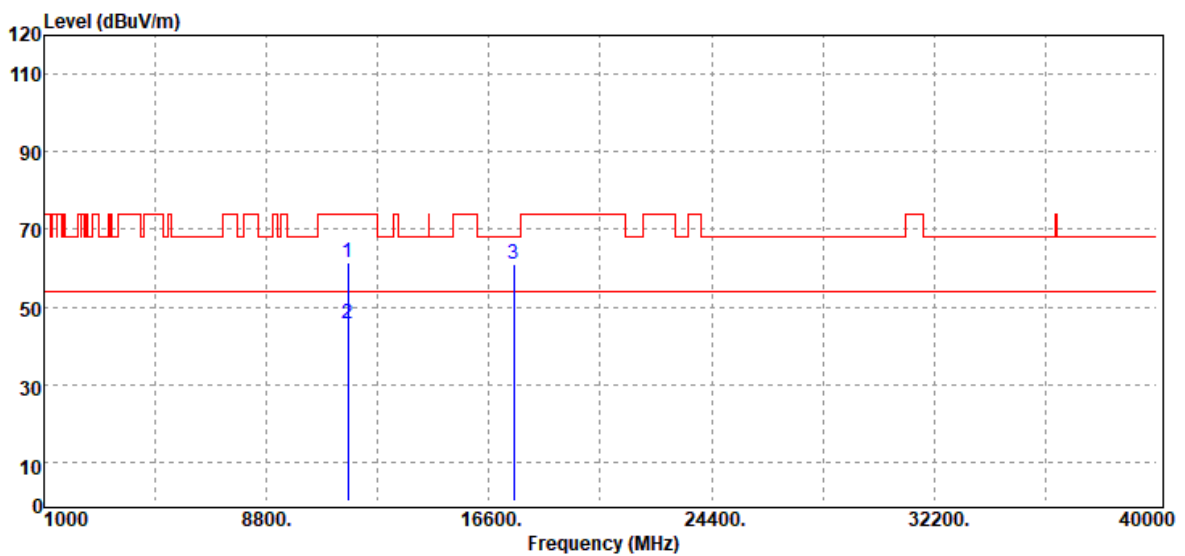


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	41.61	19.90	61.51	74.00	-12.49
11650.00	Average	25.64	19.90	45.54	54.00	-8.46
17475.00	Peak	31.74	29.11	60.85	68.20	-7.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

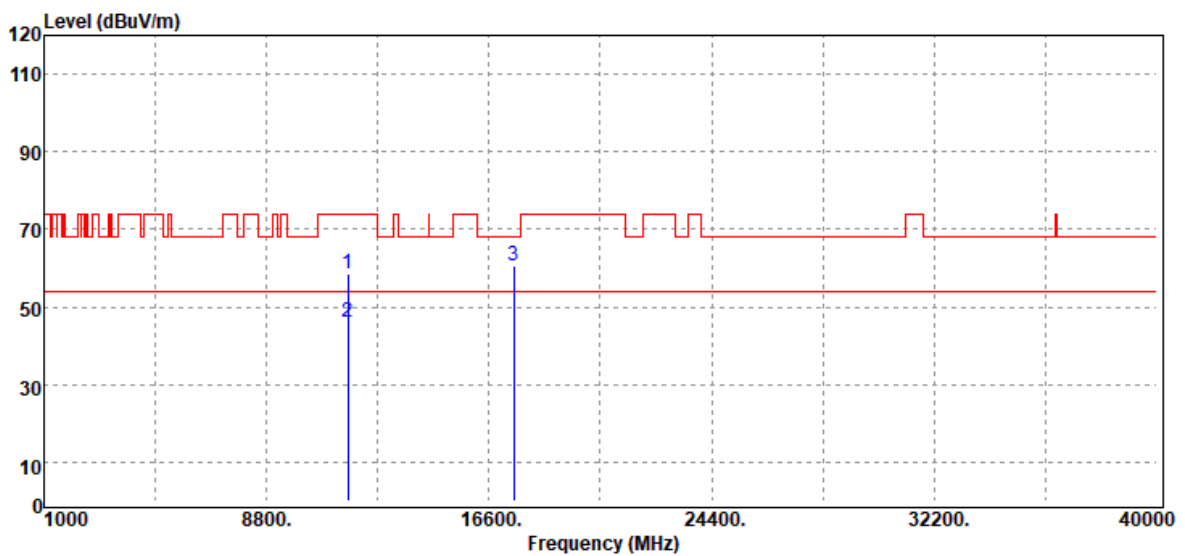

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.00	Peak	38.85	19.90	58.75	74.00	-15.25
11650.00	Average	26.03	19.90	45.93	54.00	-8.07
17475.00	Peak	31.43	29.11	60.54	68.20	-7.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	40.08	19.90	59.98	74.00	-14.02
11650.00	Average	27.08	19.90	46.98	54.00	-7.02
17475.00	Peak	31.49	29.11	60.60	68.20	-7.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

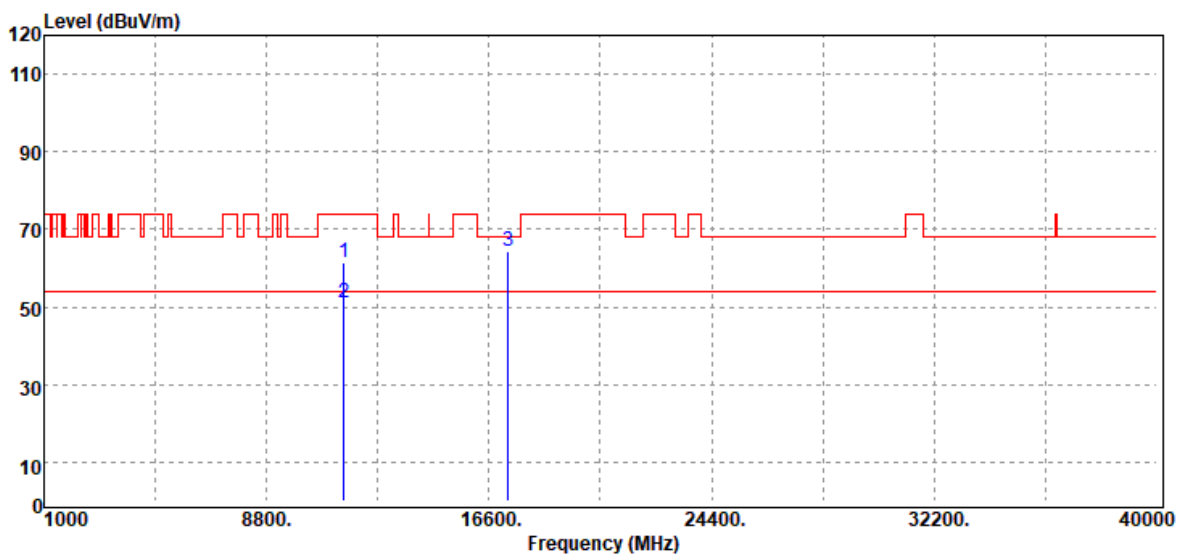


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	41.94	19.72	61.66	74.00	-12.34
11510.00	Average	31.47	19.72	51.19	54.00	-2.81
17265.00	Peak	34.65	29.80	64.45	68.20	-3.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

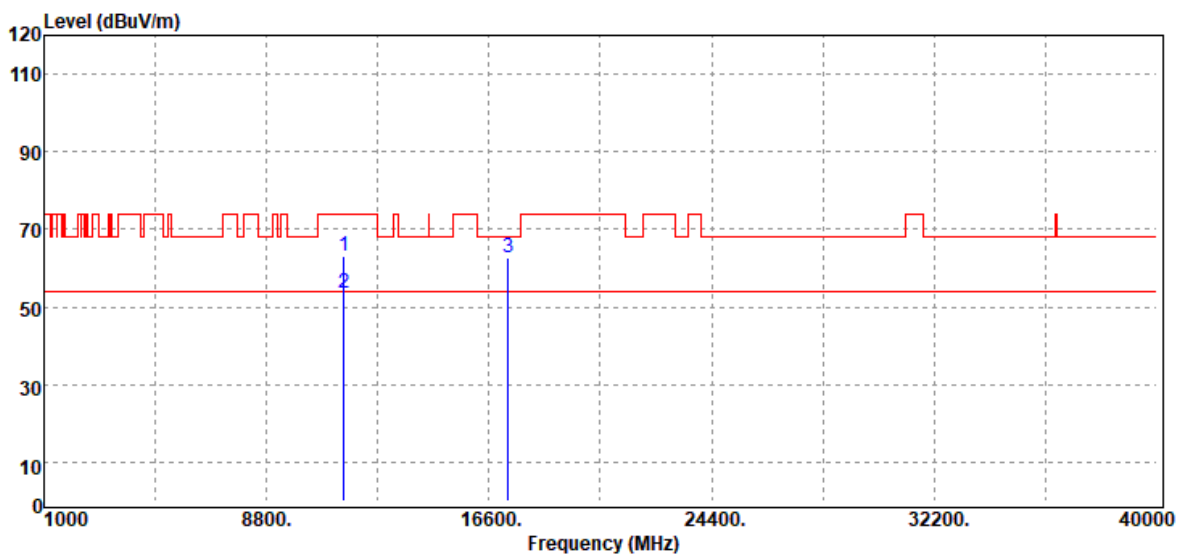


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	43.41	19.72	63.13	74.00	-10.87
11510.00	Average	33.73	19.72	53.45	54.00	-0.55
17265.00	Peak	33.09	29.80	62.89	68.20	-5.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

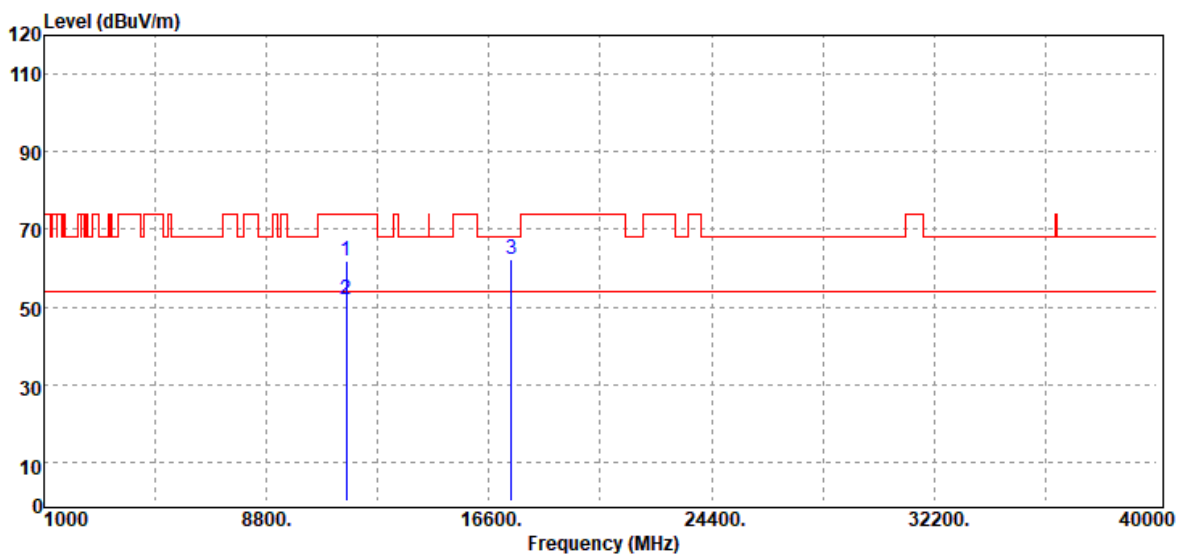


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	41.94	19.87	61.81	74.00	-12.19
11590.00	Average	32.23	19.87	52.10	54.00	-1.90
17385.00	Peak	32.94	29.24	62.18	68.20	-6.02
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	21.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	November 19, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

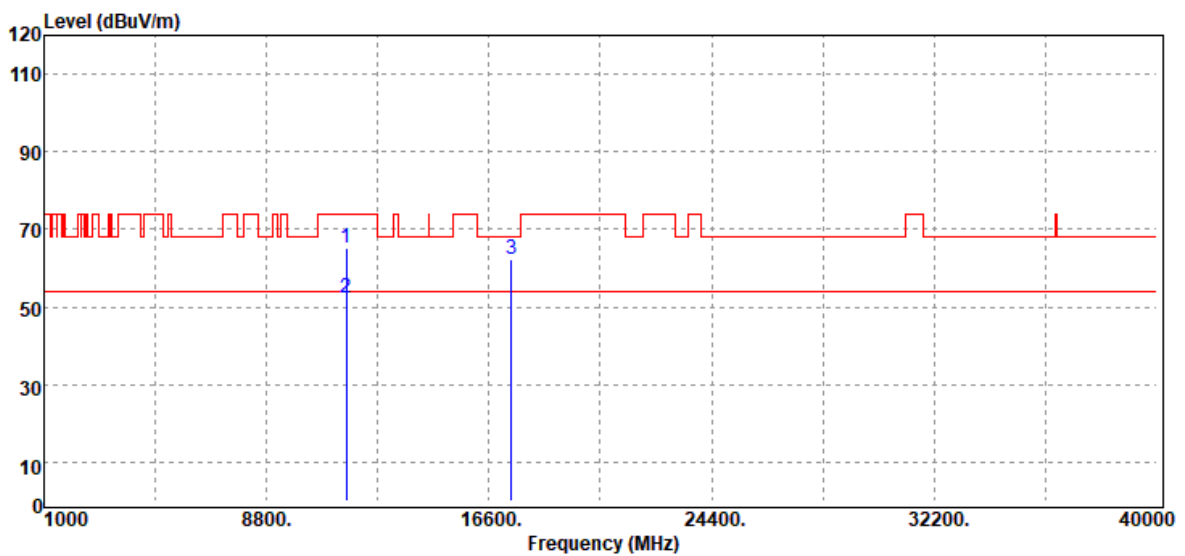


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	45.40	19.87	65.27	74.00	-8.73
11590.00	Average	32.63	19.87	52.50	54.00	-1.50
17385.00	Peak	33.16	29.24	62.40	68.20	-5.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775 MHz_106/53	Temp/Hum	21.4(°C)/ 71%RH
Test Item	Harmonic	Test Date	November 20, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

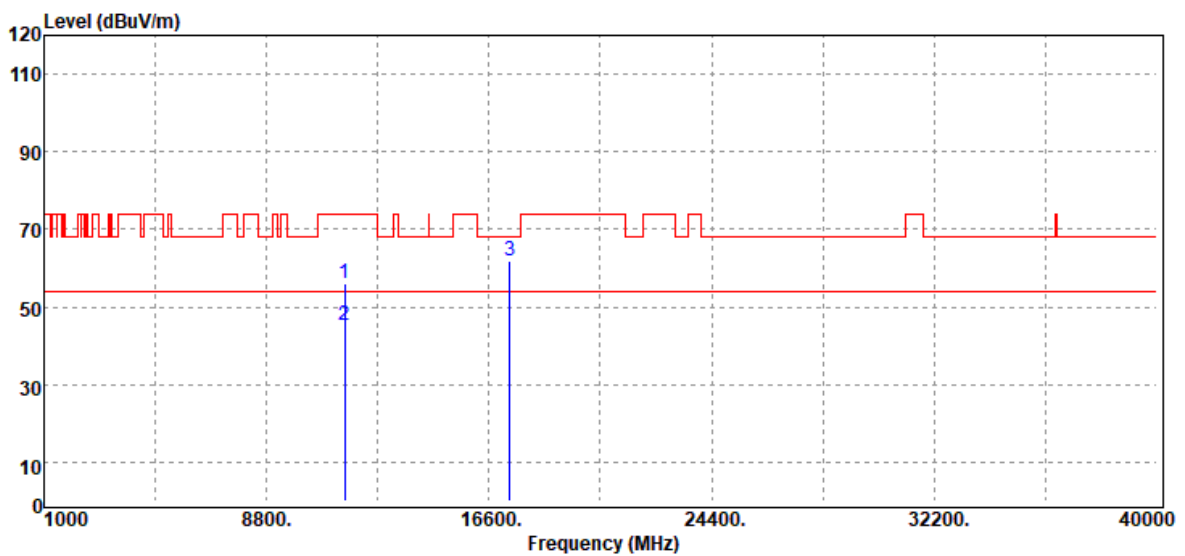


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	36.43	19.80	56.23	74.00	-17.77
11550.00	Average	25.59	19.80	45.39	54.00	-8.61
17325.00	Peak	32.27	29.48	61.75	68.20	-6.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/53	Temp/Hum	21.4(°C)/ 71%RH
Test Item	Harmonic	Test Date	November 20, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

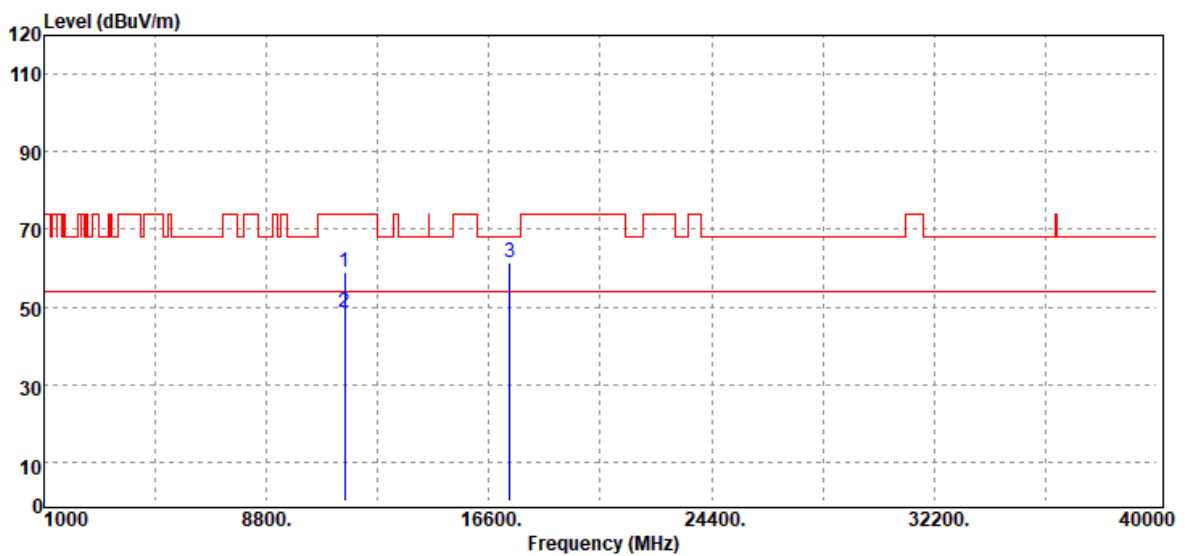


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	39.06	19.80	58.86	74.00	-15.14
11550.00	Average	28.80	19.80	48.60	54.00	-5.40
17325.00	Peak	32.17	29.48	61.65	68.20	-6.55
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	21.4(°C)/ 71%RH
Test Item	Harmonic	Test Date	November 20, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

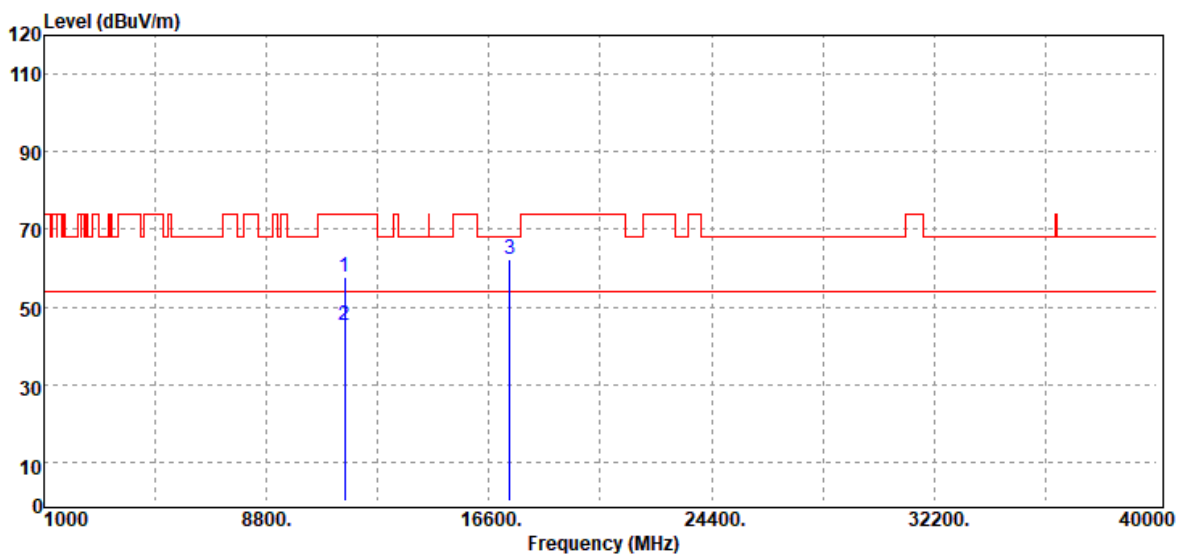


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11550.00	Peak	38.02	19.80	57.82	74.00	-16.18
11550.00	Average	25.43	19.80	45.23	54.00	-8.77
17325.00	Peak	32.85	29.48	62.33	68.20	-5.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	21.4(°C)/ 71%RH
Test Item	Harmonic	Test Date	November 20, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

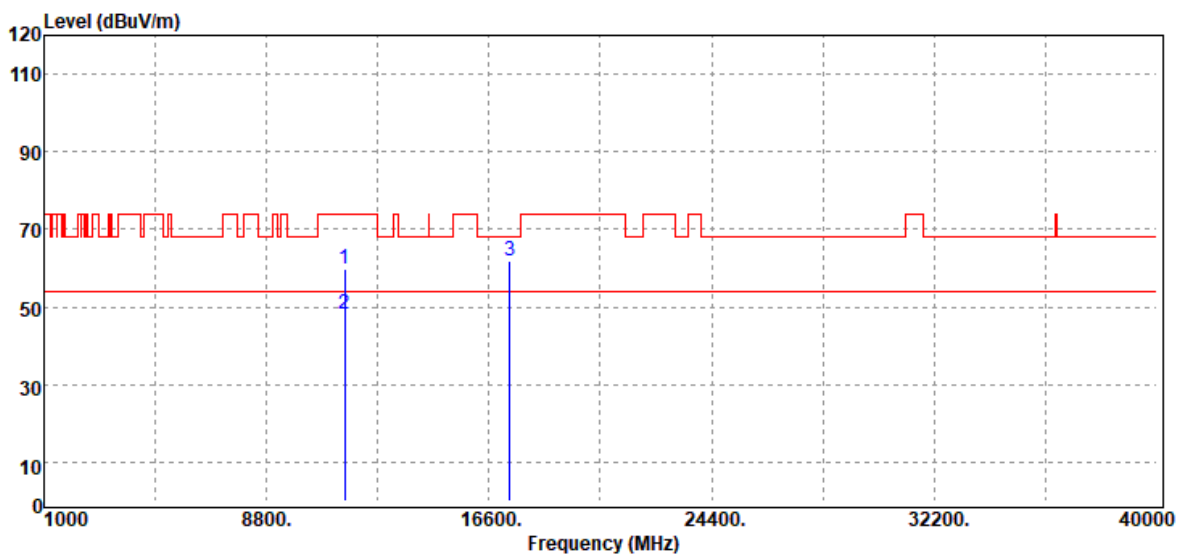

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	40.09	19.80	59.89	74.00	-14.11
11550.00	Average	28.31	19.80	48.11	54.00	-5.89
17325.00	Peak	32.55	29.48	62.03	68.20	-6.17
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Data for UNII-1 (Beamforming Mode)

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

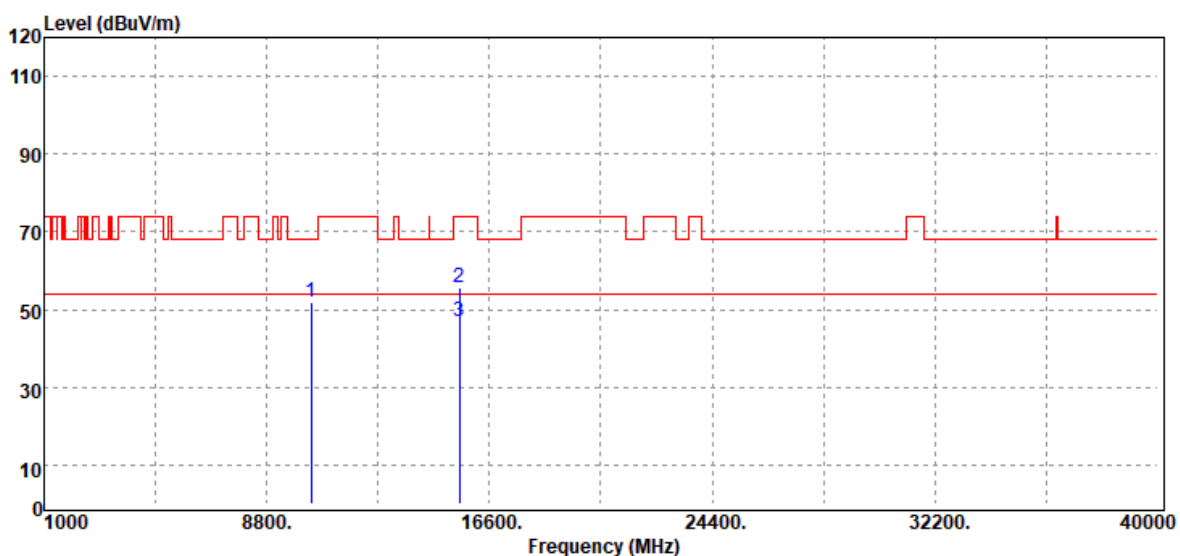


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10360.00	Peak	34.25	17.72	51.97	68.20	-16.23
15540.00	Peak	30.85	24.84	55.69	74.00	-18.31
15540.00	Average	21.97	24.84	46.81	54.00	-7.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5180MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

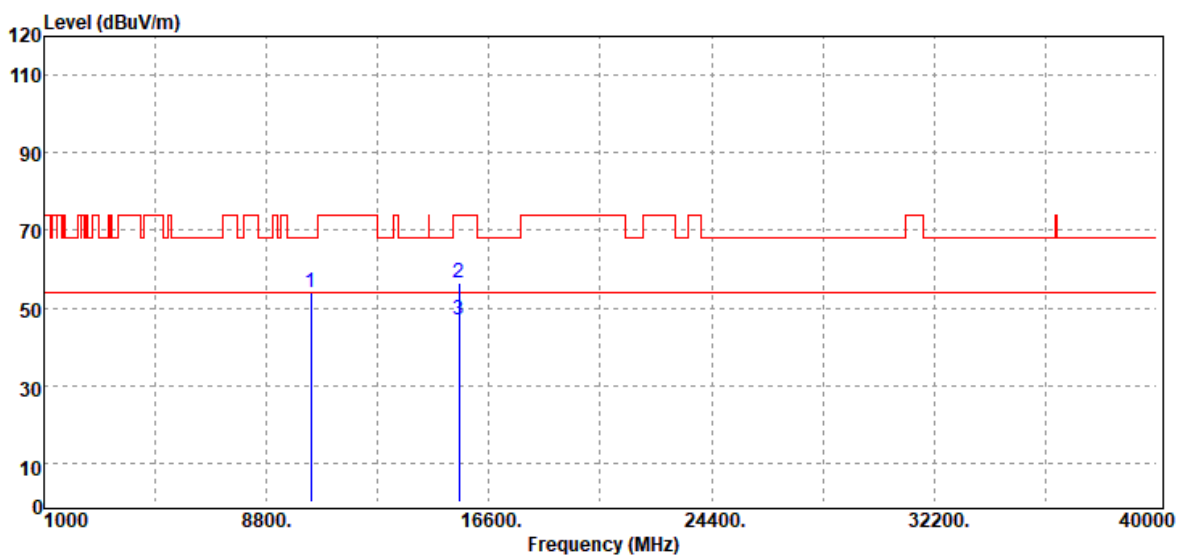


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	36.20	17.72	53.92	68.20	-14.28
15540.00	Peak	31.43	24.84	56.27	74.00	-17.73
15540.00	Average	21.96	24.84	46.80	54.00	-7.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonics	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

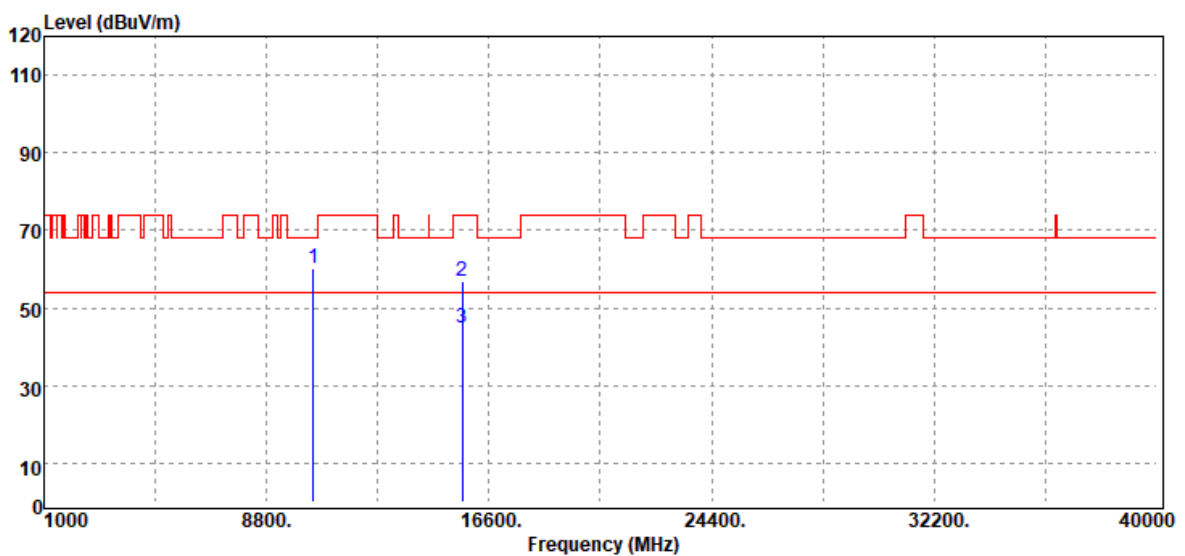


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	42.34	17.90	60.24	68.20	-7.96
15660.00	Peak	31.65	25.15	56.80	74.00	-17.20
15660.00	Average	19.72	25.15	44.87	54.00	-9.13
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

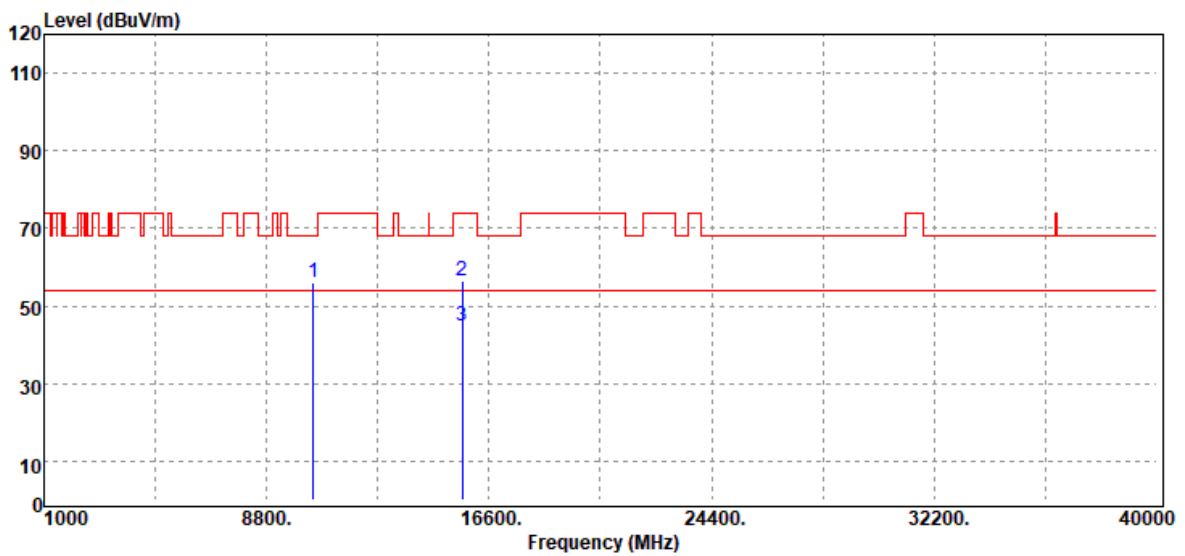


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	38.03	17.90	55.93	68.20	-12.27
15660.00	Peak	31.47	25.15	56.62	74.00	-17.38
15660.00	Average	19.63	25.15	44.78	54.00	-9.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

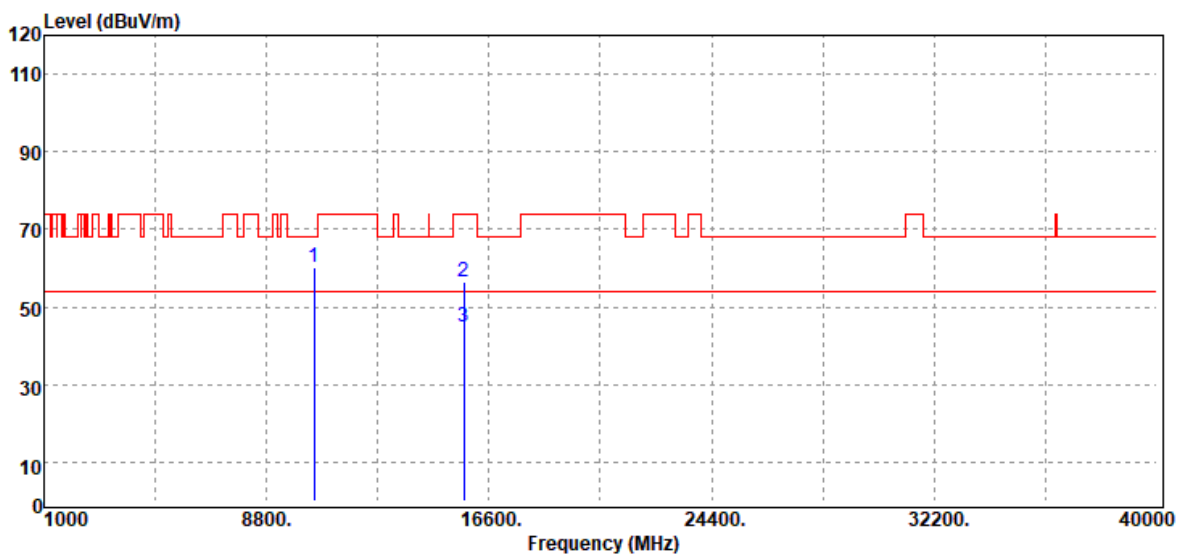

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	42.16	18.05	60.21	68.20	-7.99
15720.00	Peak	30.87	25.55	56.42	74.00	-17.58
15720.00	Average	19.48	25.55	45.03	54.00	-8.97
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.