


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

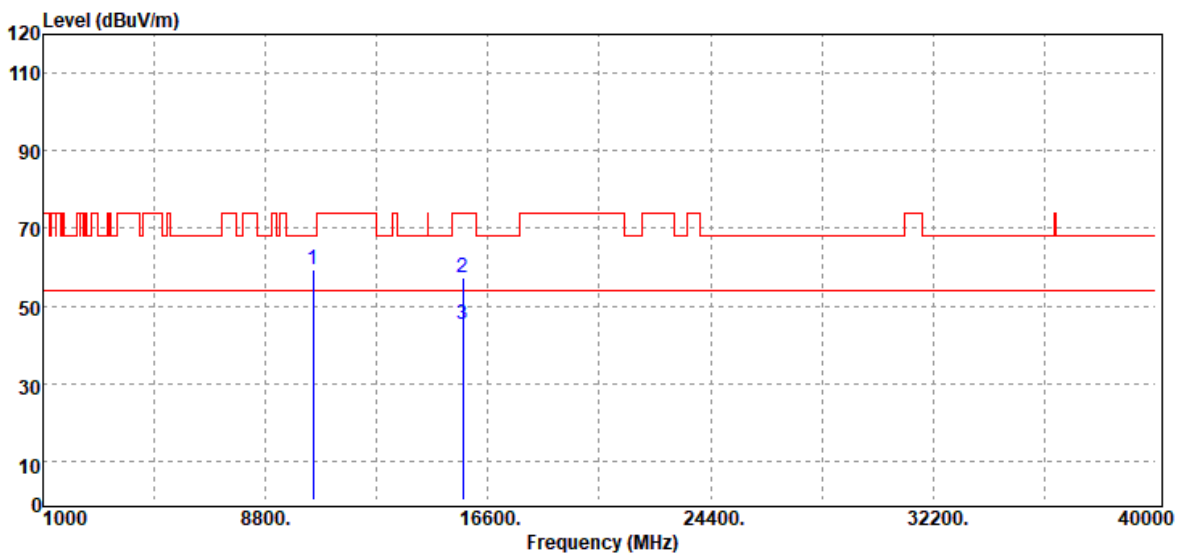


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	41.33	18.05	59.38	68.20	-8.82
15720.00	Peak	31.56	25.55	57.11	74.00	-16.89
15720.00	Average	19.69	25.55	45.24	54.00	-8.76
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5180MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

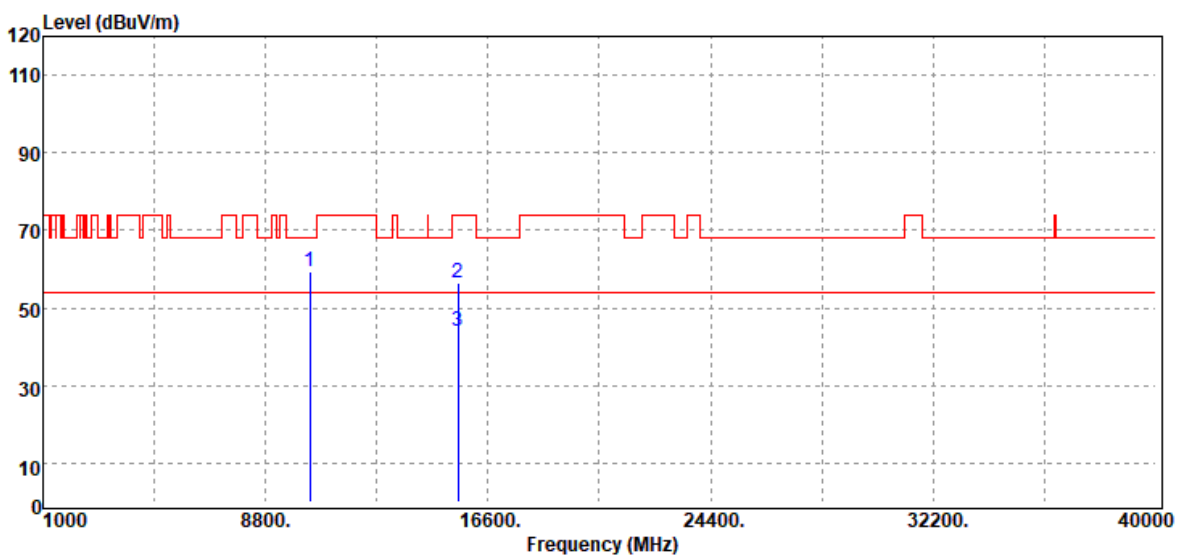

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	41.57	17.72	59.29	68.20	-8.91
15540.00	Peak	31.73	24.84	56.57	74.00	-17.43
15540.00	Average	19.06	24.84	43.90	54.00	-10.10
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5180MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	40.64	17.72	58.36	68.20	-9.84
15540.00	Peak	31.97	24.84	56.81	74.00	-17.19
15540.00	Average	19.19	24.84	44.03	54.00	-9.97
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5220MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

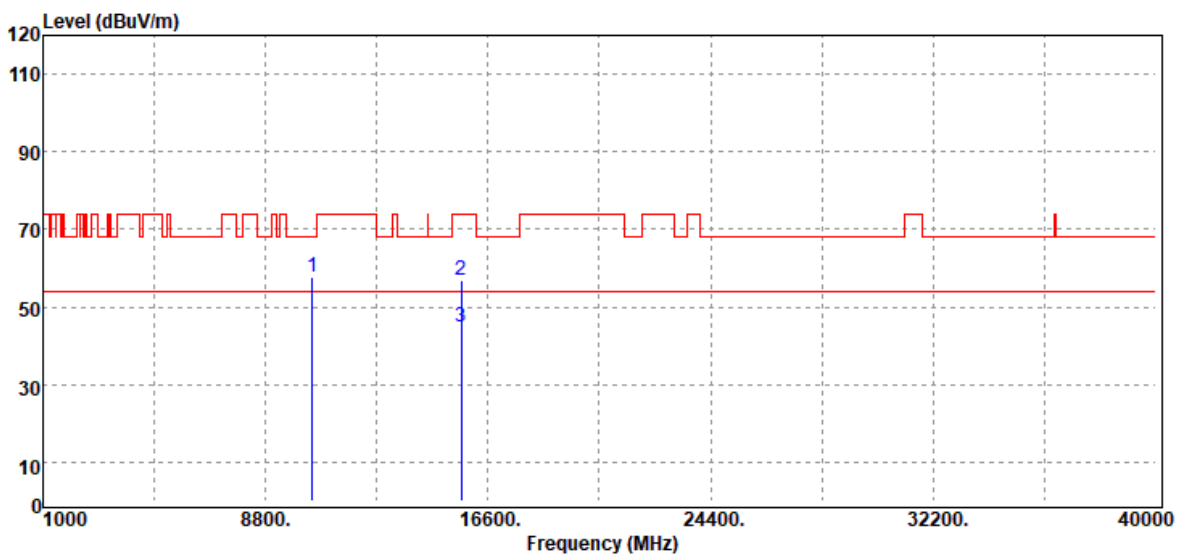


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	39.88	17.90	57.78	68.20	-10.42
15660.00	Peak	31.62	25.15	56.77	74.00	-17.23
15660.00	Average	19.53	25.15	44.68	54.00	-9.32
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5220MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

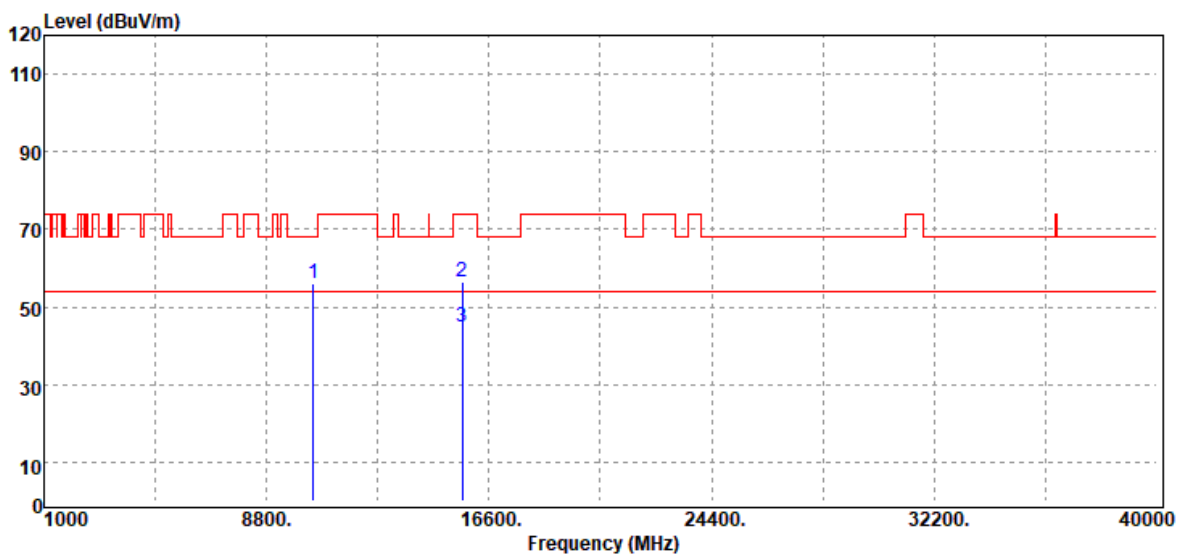


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	38.24	17.90	56.14	68.20	-12.06
15660.00	Peak	31.48	25.15	56.63	74.00	-17.37
15660.00	Average	19.70	25.15	44.85	54.00	-9.15
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5240MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

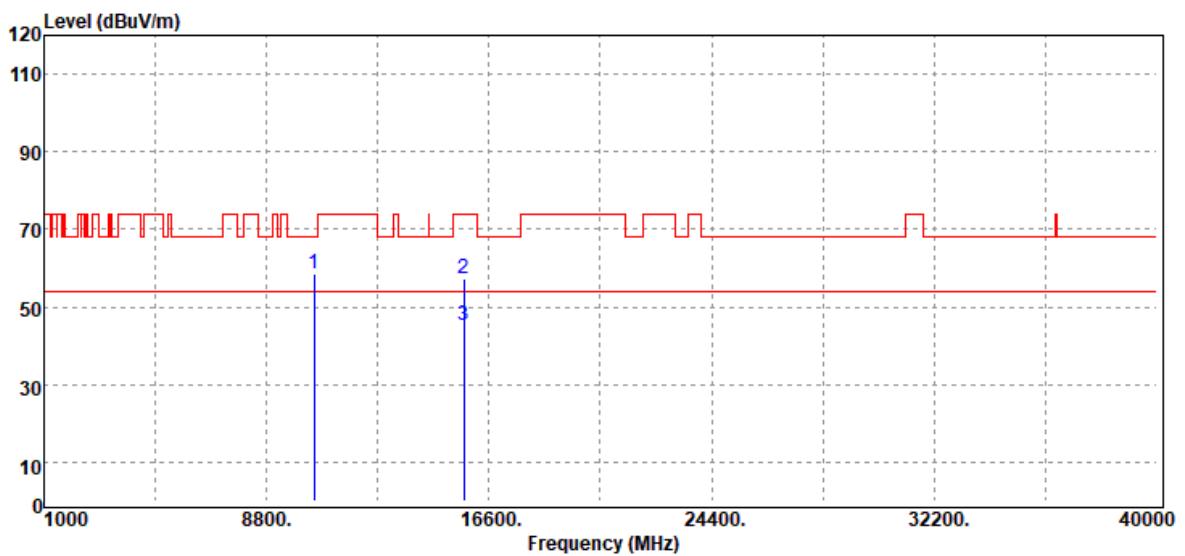


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	40.37	18.05	58.42	68.20	-9.78
15720.00	Peak	31.82	25.55	57.37	74.00	-16.63
15720.00	Average	19.56	25.55	45.11	54.00	-8.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5240MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

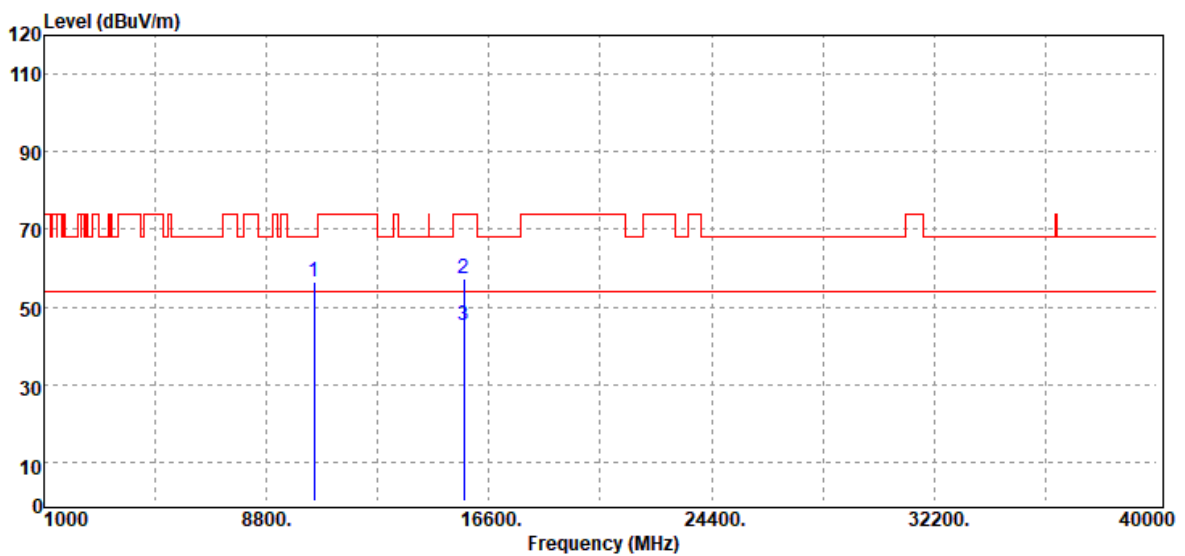


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	38.24	18.05	56.29	68.20	-11.91
15720.00	Peak	31.78	25.55	57.33	74.00	-16.67
15720.00	Average	19.71	25.55	45.26	54.00	-8.74
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5190MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

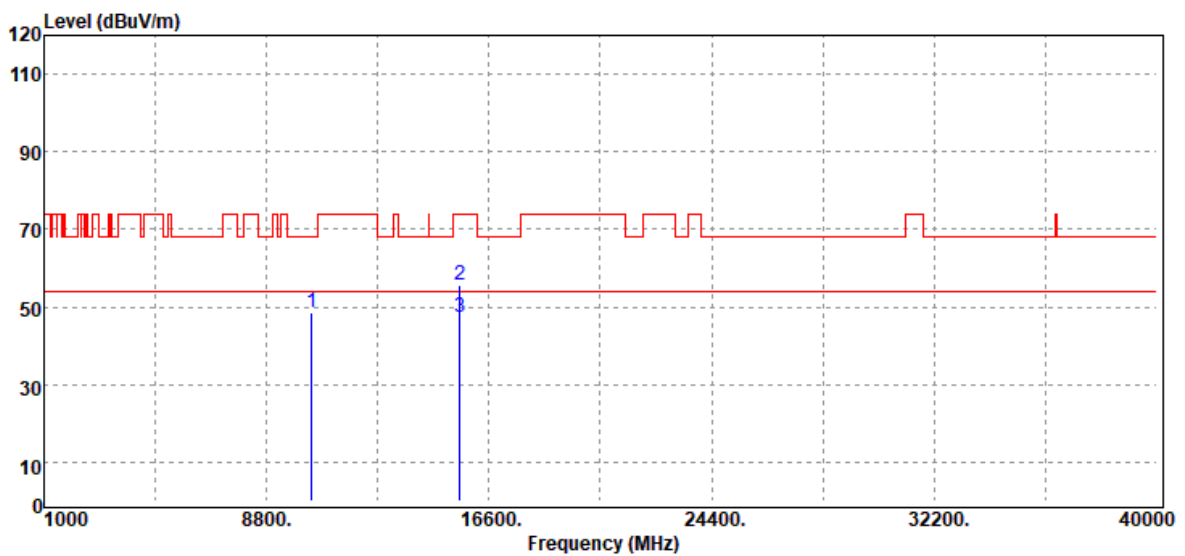

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	30.76	17.76	48.52	68.20	-19.68
15570.00	Peak	30.81	24.86	55.67	74.00	-18.33
15570.00	Average	22.37	24.86	47.23	54.00	-6.77
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	30.53	17.76	48.29	68.20	-19.91
15570.00	Peak	30.45	24.86	55.31	74.00	-18.69
15570.00	Average	22.50	24.86	47.36	54.00	-6.64
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5230MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10460.00	Peak	29.69	17.97	47.66	68.20	-20.54
15690.00	Peak	31.36	25.38	56.74	74.00	-17.26
15690.00	Average	22.89	25.38	48.27	54.00	-5.73
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5230MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

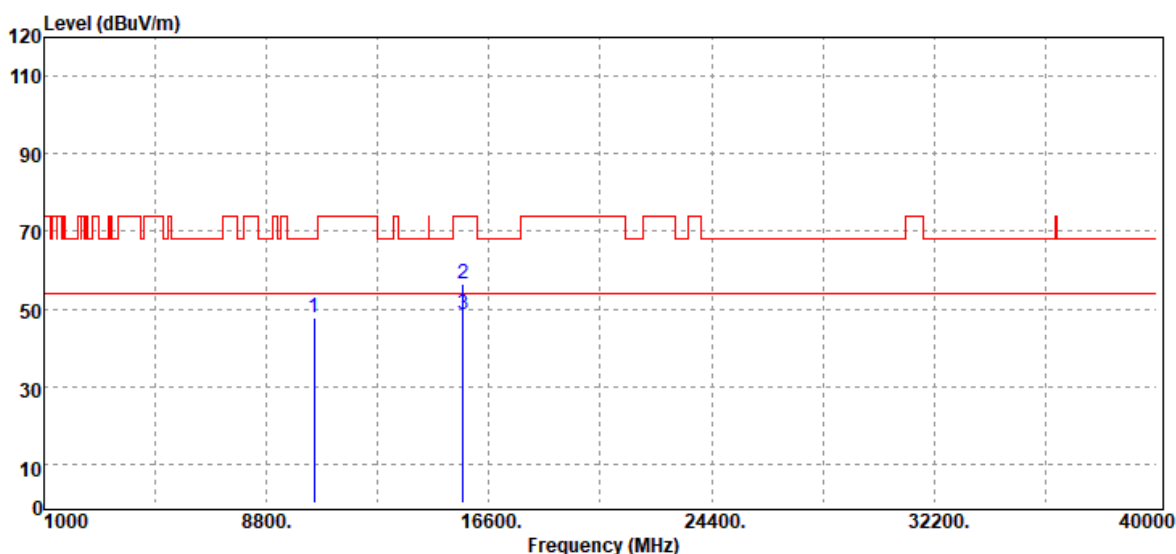


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10460.00	Peak	29.90	17.97	47.87	68.20	-20.33
15690.00	Peak	31.02	25.38	56.40	74.00	-17.60
15690.00	Average	23.16	25.38	48.54	54.00	-5.46
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

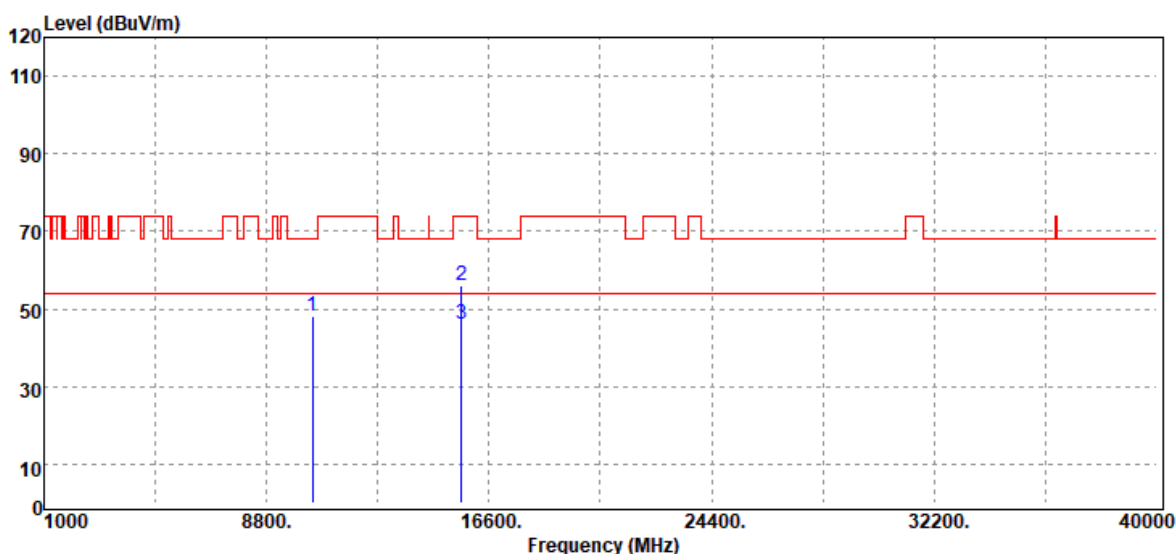


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	30.42	17.86	48.28	68.20	-19.92
15630.00	Peak	30.94	25.00	55.94	74.00	-18.06
15630.00	Average	20.97	25.00	45.97	54.00	-8.03
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5210MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

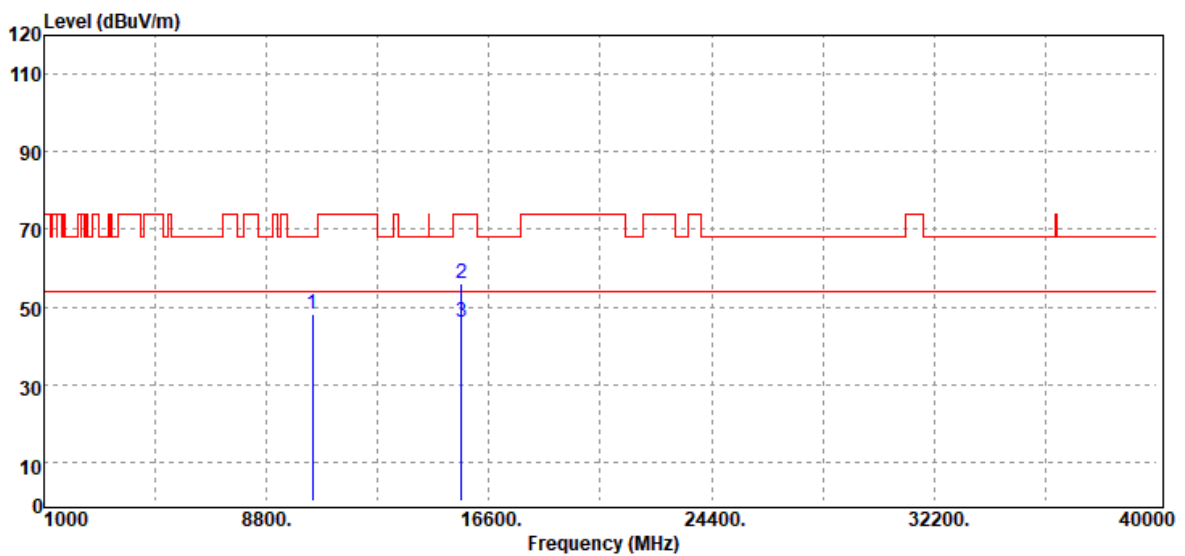


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	30.14	17.86	48.00	68.20	-20.20
15630.00	Peak	31.04	25.00	56.04	74.00	-17.96
15630.00	Average	21.20	25.00	46.20	54.00	-7.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

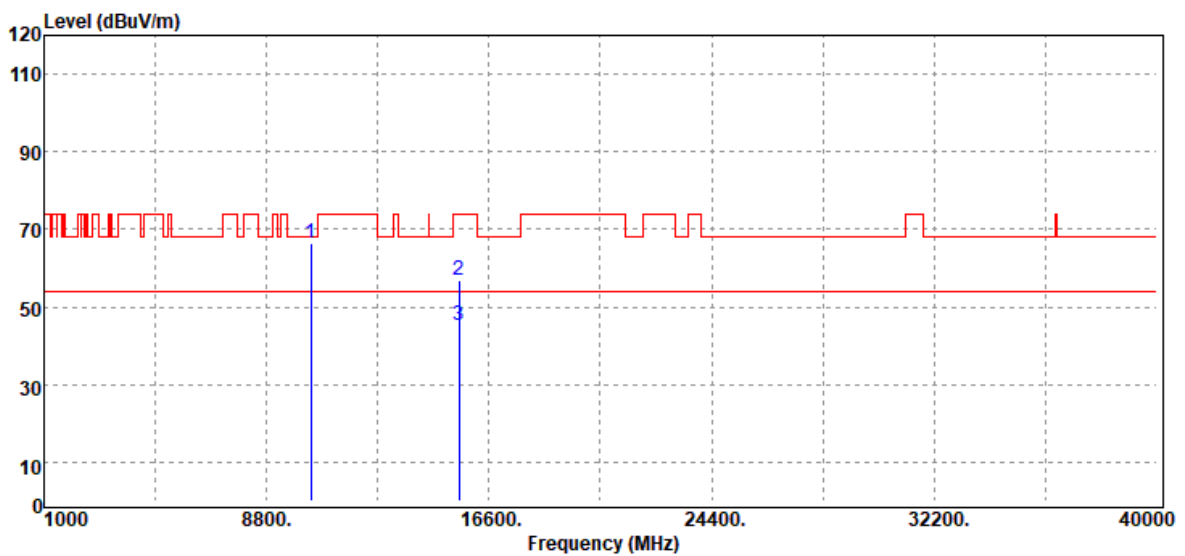


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	48.84	17.72	66.56	68.20	-1.64
15540.00	Peak	32.09	24.84	56.93	74.00	-17.07
15540.00	Average	20.63	24.84	45.47	54.00	-8.53
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_26/0	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

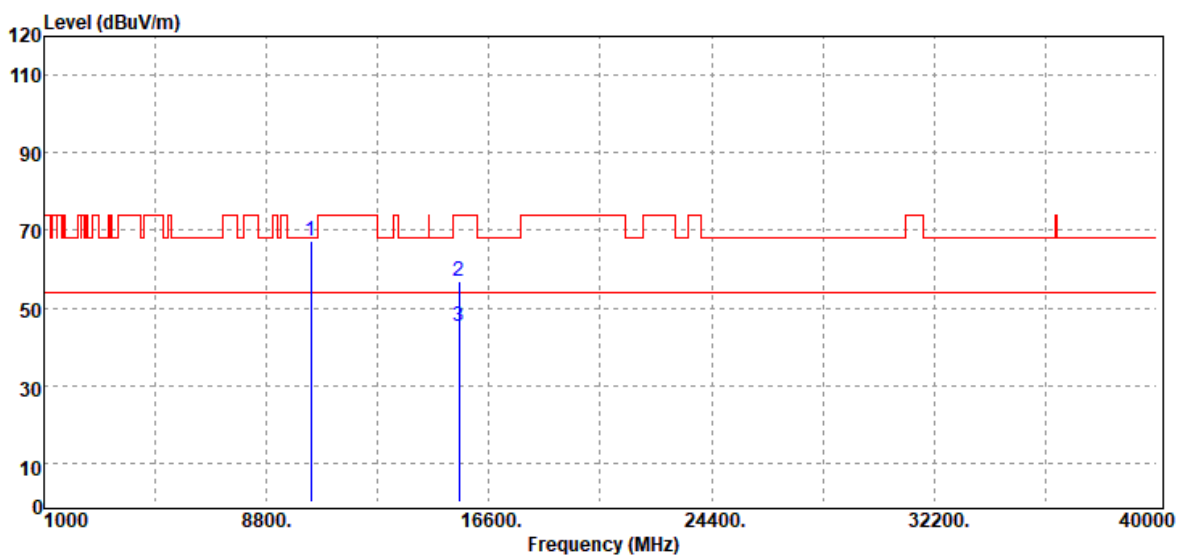

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	49.75	17.72	67.47	68.20	-0.73
15540.00	Peak	31.95	24.84	56.79	74.00	-17.21
15540.00	Average	20.32	24.84	45.16	54.00	-8.84
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	46.59	17.72	64.31	68.20	-3.89
15540.00	Peak	32.16	24.84	57.00	74.00	-17.00
15540.00	Average	20.50	24.84	45.34	54.00	-8.66
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_52/37	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

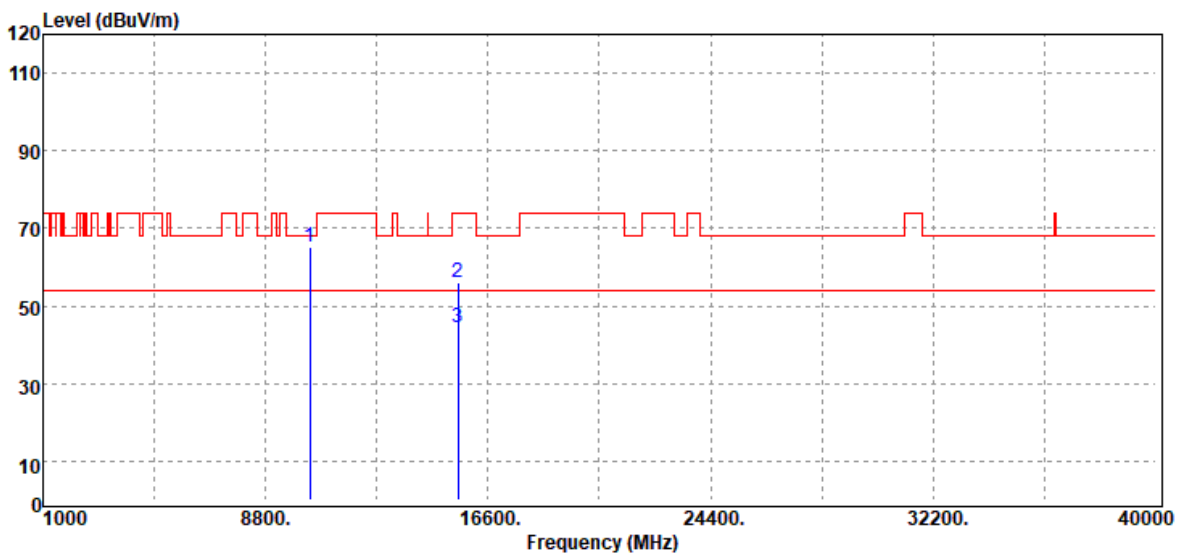


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	47.34	17.72	65.06	68.20	-3.14
15540.00	Peak	31.22	24.84	56.06	74.00	-17.94
15540.00	Average	19.70	24.84	44.54	54.00	-9.46
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

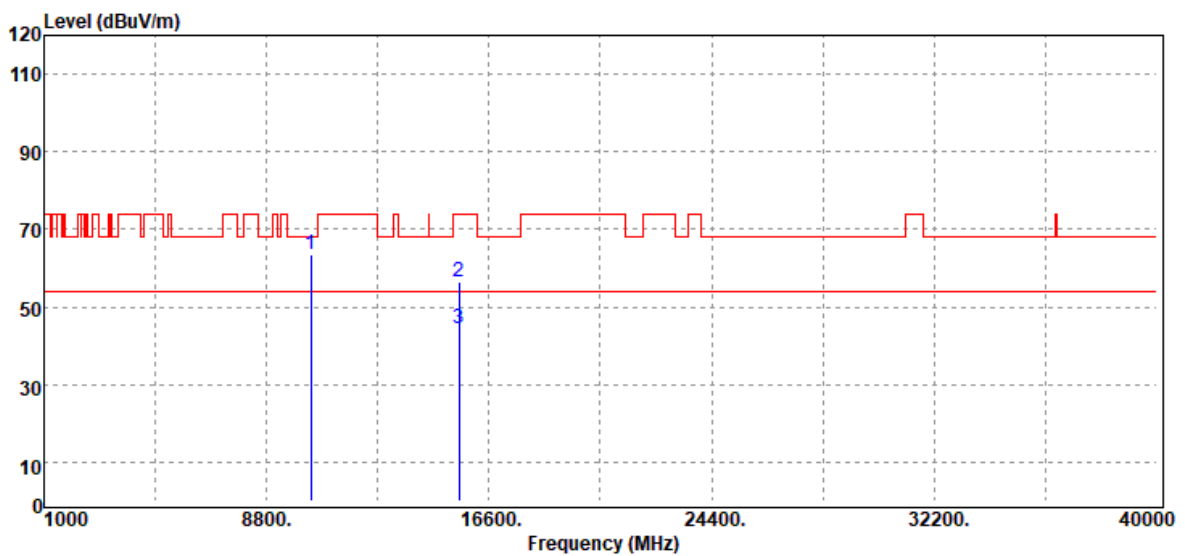


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	45.86	17.72	63.58	68.20	-4.62
15540.00	Peak	31.61	24.84	56.45	74.00	-17.55
15540.00	Average	19.71	24.84	44.55	54.00	-9.45
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax 20 / 5180MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

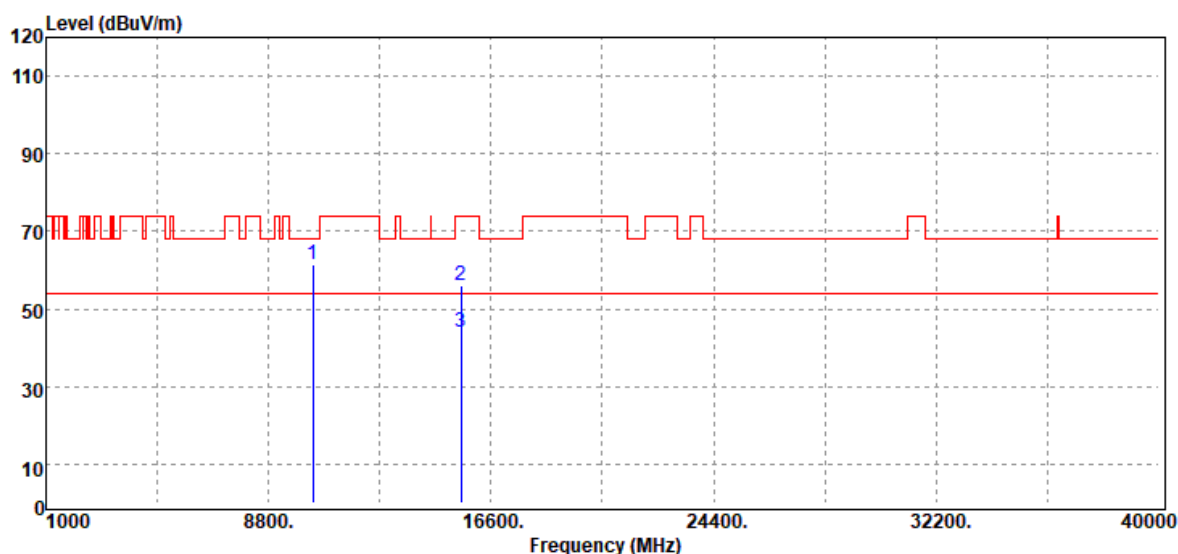


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10360.00	Peak	43.80	17.72	61.52	68.20	-6.68
15540.00	Peak	31.33	24.84	56.17	74.00	-17.83
15540.00	Average	19.36	24.84	44.20	54.00	-9.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5220MHz_106/53	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

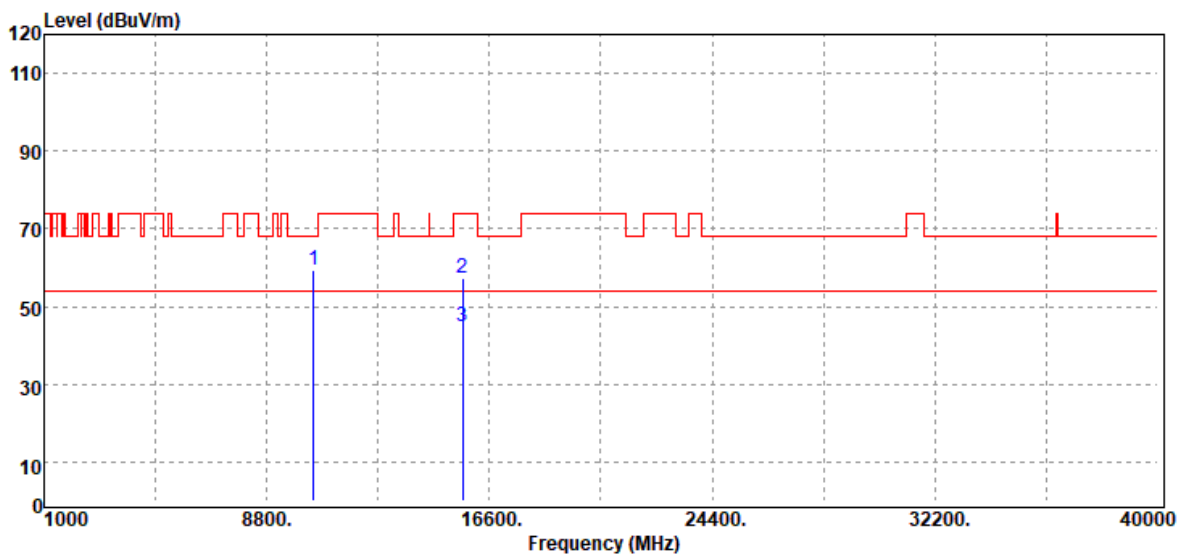


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	41.56	17.90	59.46	68.20	-8.74
15660.00	Peak	32.18	25.15	57.33	74.00	-16.67
15660.00	Average	19.61	25.15	44.76	54.00	-9.24
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5220MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

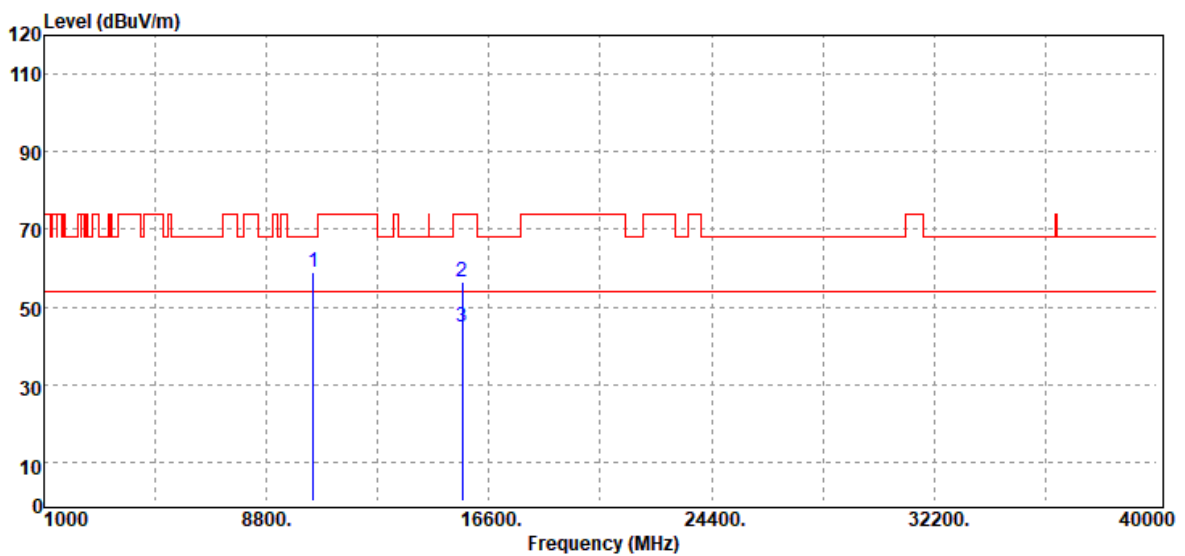


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10440.00	Peak	41.14	17.90	59.04	68.20	-9.16
15660.00	Peak	31.41	25.15	56.56	74.00	-17.44
15660.00	Average	19.78	25.15	44.93	54.00	-9.07
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5240MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

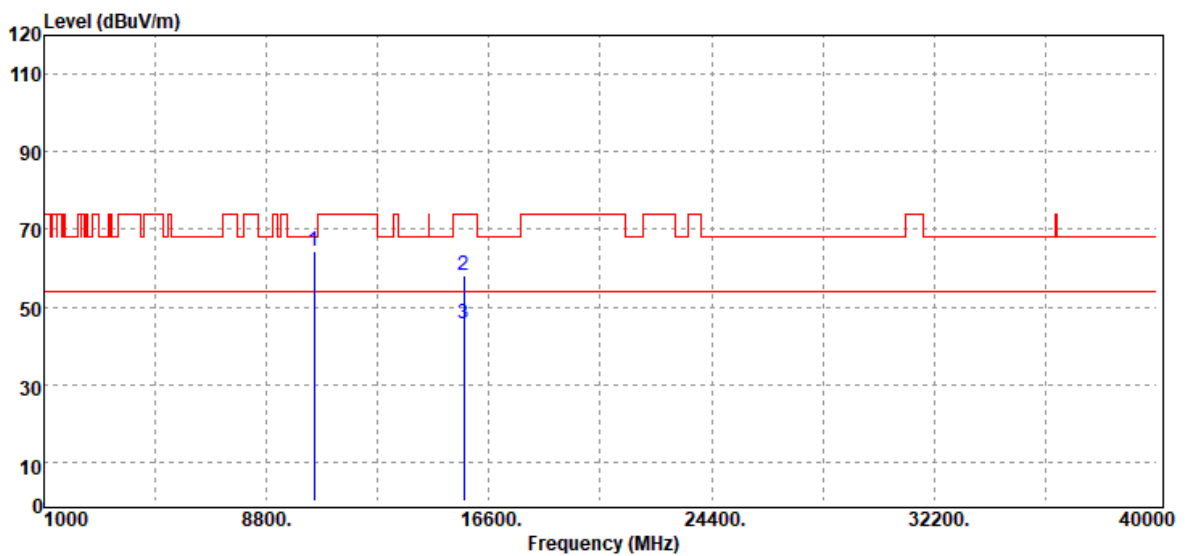


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	46.17	18.05	64.22	68.20	-3.98
15720.00	Peak	32.41	25.55	57.96	74.00	-16.04
15720.00	Average	20.32	25.55	45.87	54.00	-8.13
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5240MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

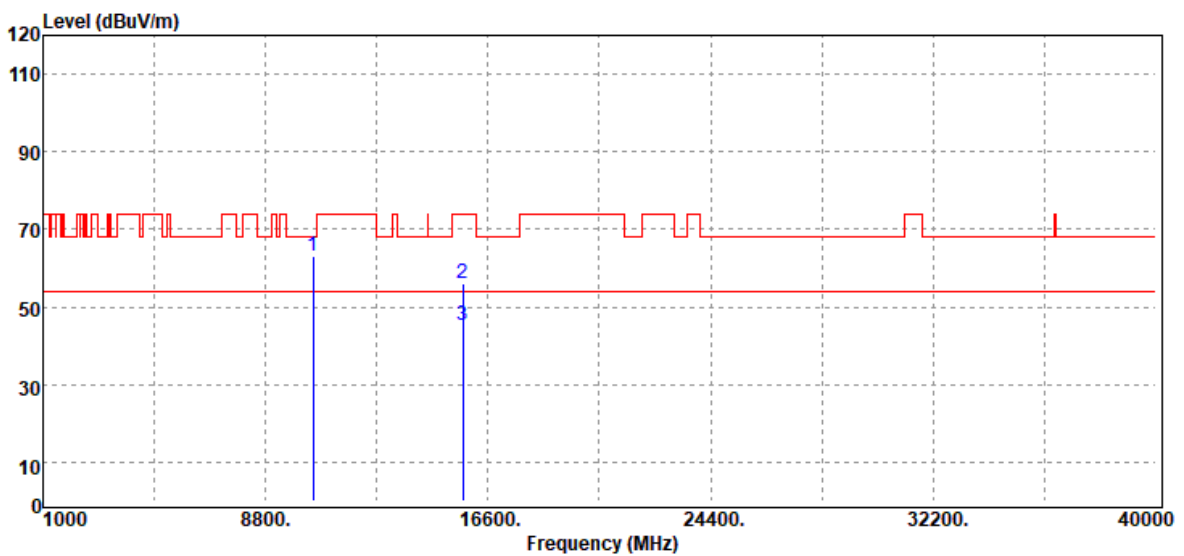


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	45.18	18.05	63.23	68.20	-4.97
15720.00	Peak	30.68	25.55	56.23	74.00	-17.77
15720.00	Average	19.65	25.55	45.20	54.00	-8.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax 40 / 5190MHz_106/53	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

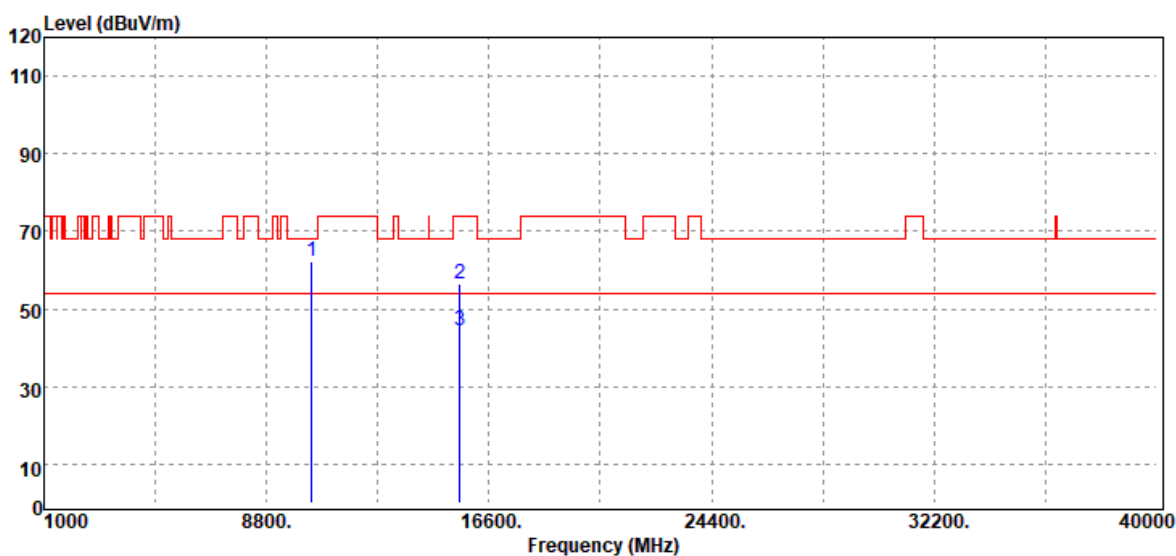

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	44.58	17.76	62.34	68.20	-5.86
15570.00	Peak	31.49	24.86	56.35	74.00	-17.65
15570.00	Average	19.68	24.86	44.54	54.00	-9.46
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5190MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

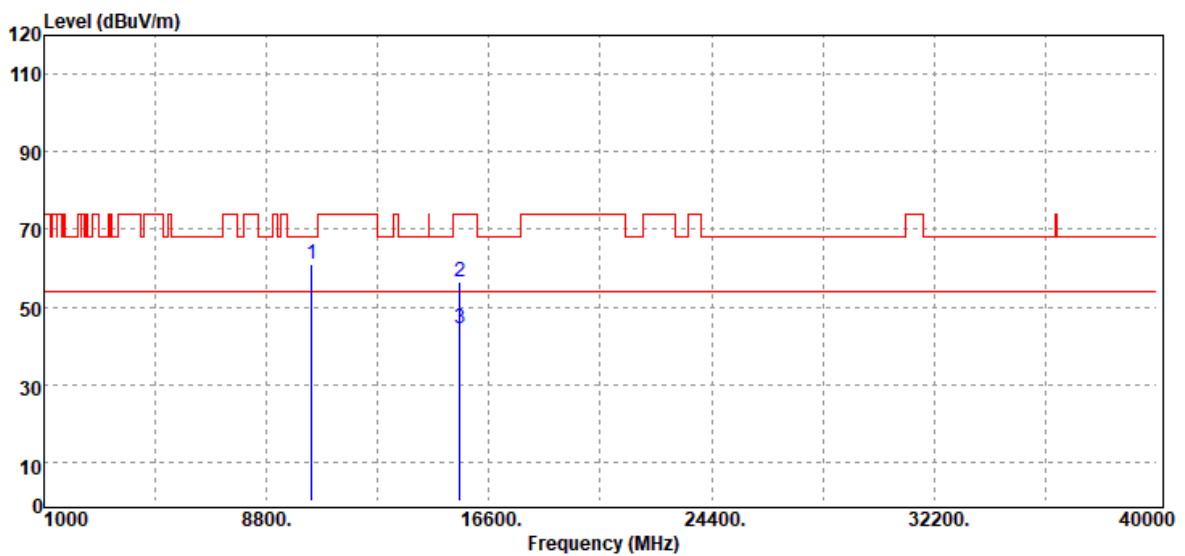


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	43.09	17.76	60.85	68.20	-7.35
15570.00	Peak	31.81	24.86	56.67	74.00	-17.33
15570.00	Average	19.65	24.86	44.51	54.00	-9.49
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5230MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

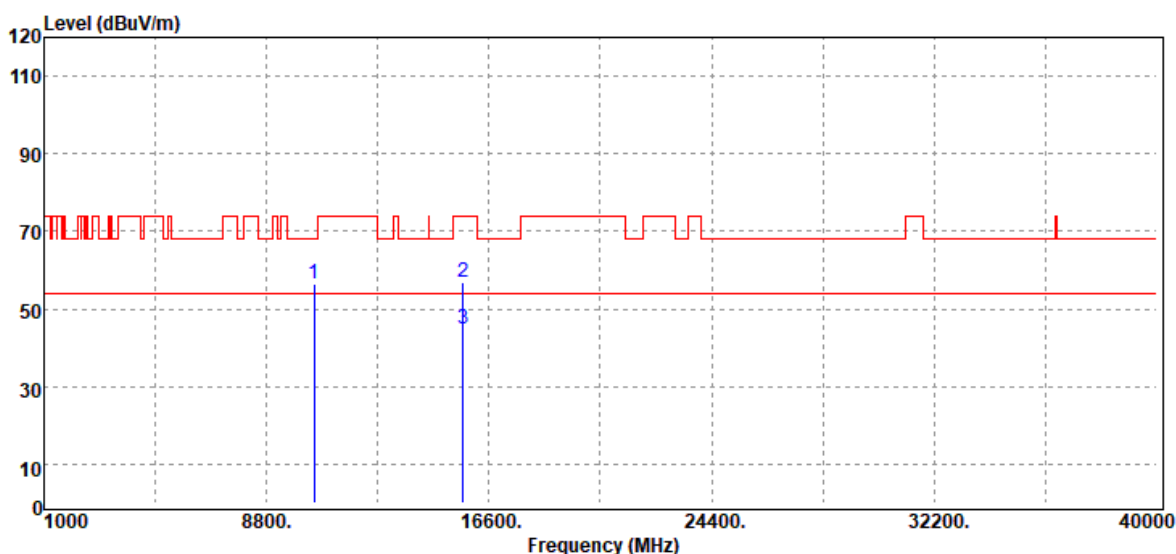


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	38.64	17.97	56.61	68.20	-11.59
15690.00	Peak	31.61	25.38	56.99	74.00	-17.01
15690.00	Average	19.56	25.38	44.94	54.00	-9.06
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5230MHz_106/53	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

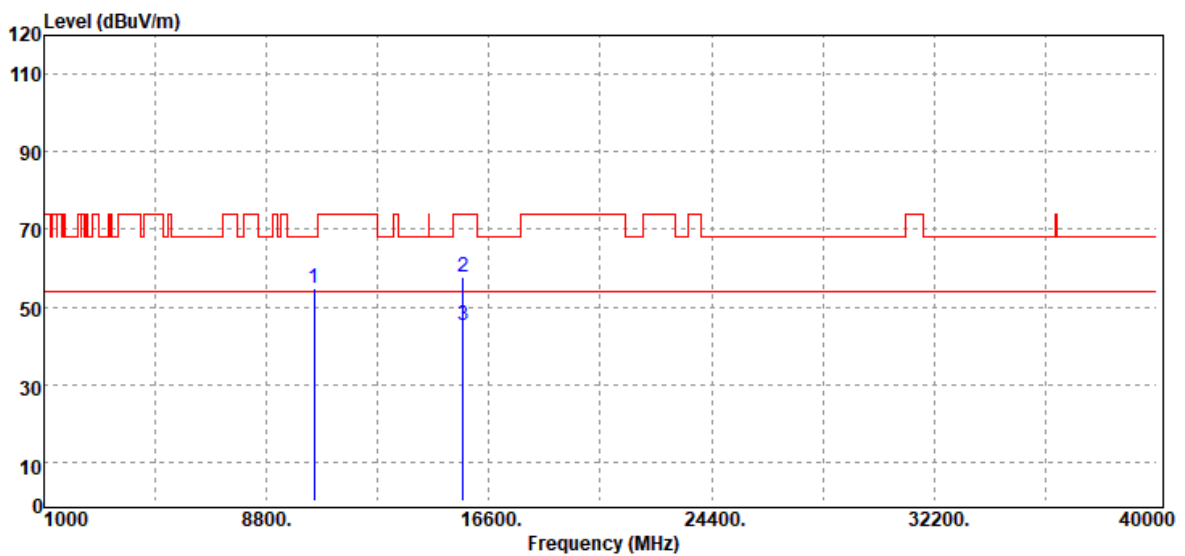


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	36.89	17.97	54.86	68.20	-13.34
15690.00	Peak	32.18	25.38	57.56	74.00	-16.44
15690.00	Average	19.78	25.38	45.16	54.00	-8.84
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5210MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

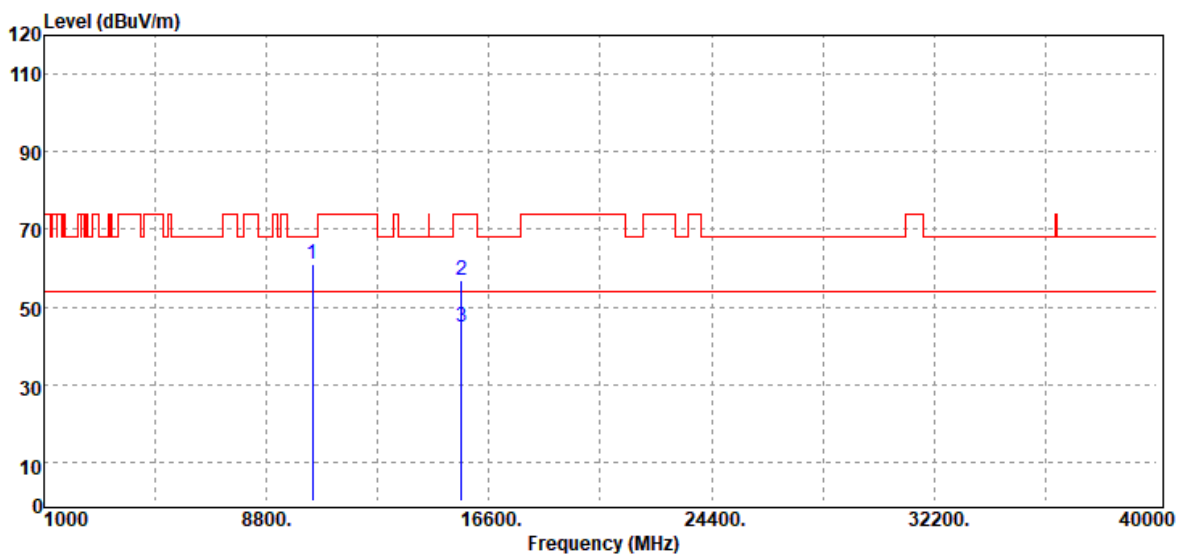


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	43.01	17.86	60.87	68.20	-7.33
15630.00	Peak	31.73	25.00	56.73	74.00	-17.27
15630.00	Average	19.83	25.00	44.83	54.00	-9.17
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5210MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

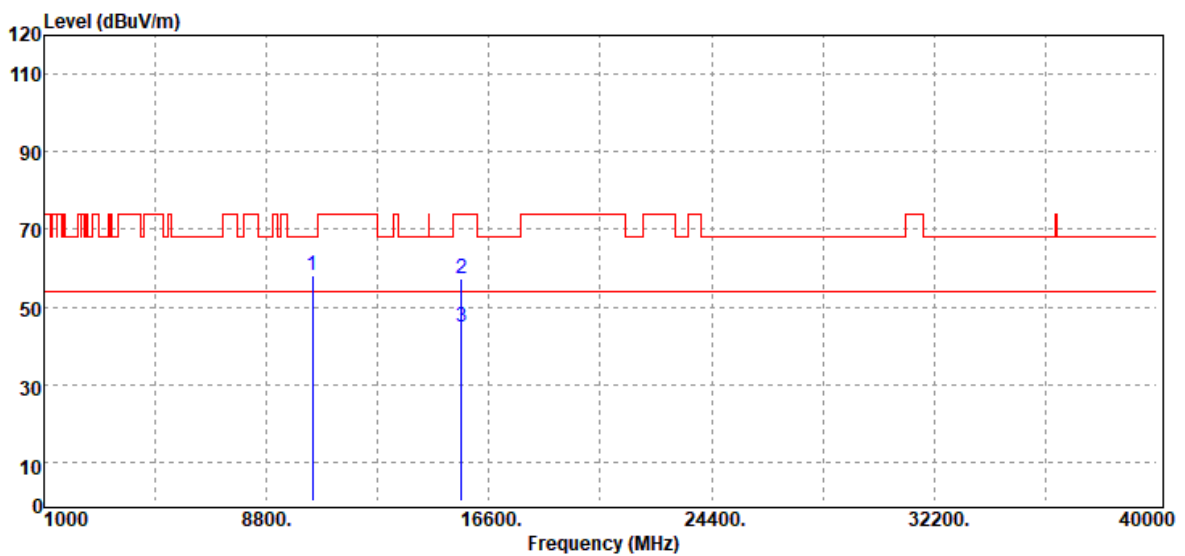

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
10420.00	Peak	40.19	17.86	58.05	68.20	-10.15
15630.00	Peak	32.13	25.00	57.13	74.00	-16.87
15630.00	Average	19.89	25.00	44.89	54.00	-9.11
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

**Test Data for UNII-2a (Beamforming Mode)**

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	22.3(°C)/ 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

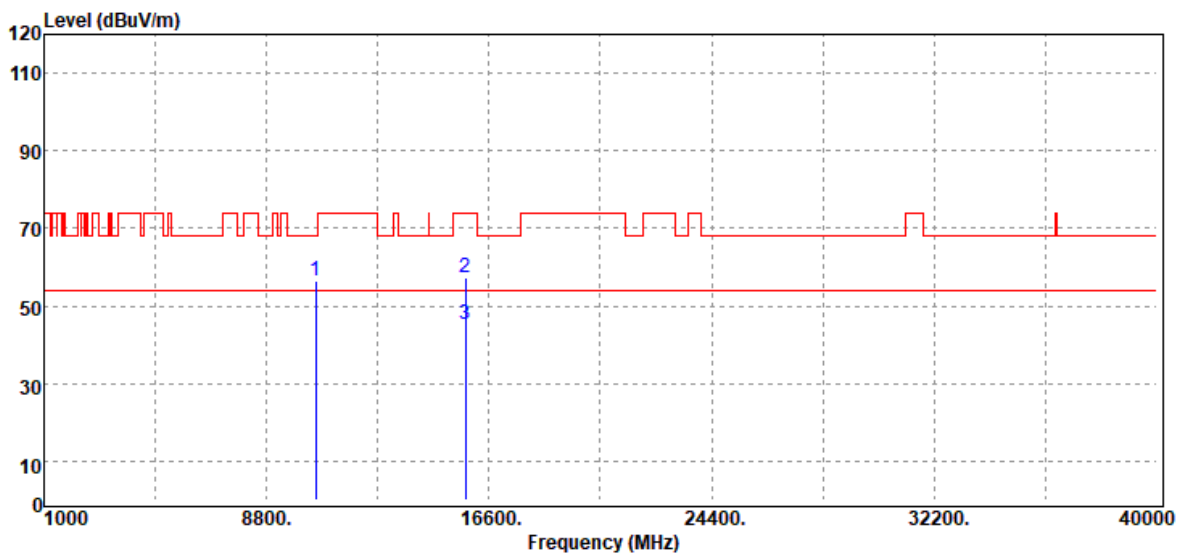


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	38.23	18.16	56.39	68.20	-11.81
15780.00	Peak	31.63	25.81	57.44	74.00	-16.56
15780.00	Average	19.57	25.81	45.38	54.00	-8.62
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

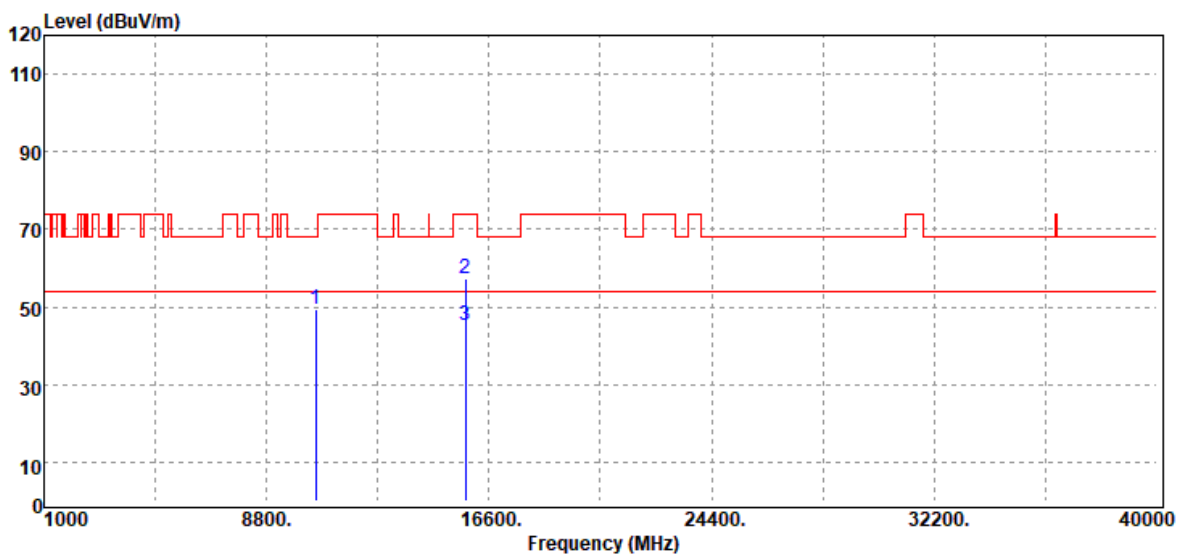


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	31.21	18.16	49.37	68.20	-18.83
15780.00	Peak	31.62	25.81	57.43	74.00	-16.57
15780.00	Average	19.61	25.81	45.42	54.00	-8.58
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonics	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

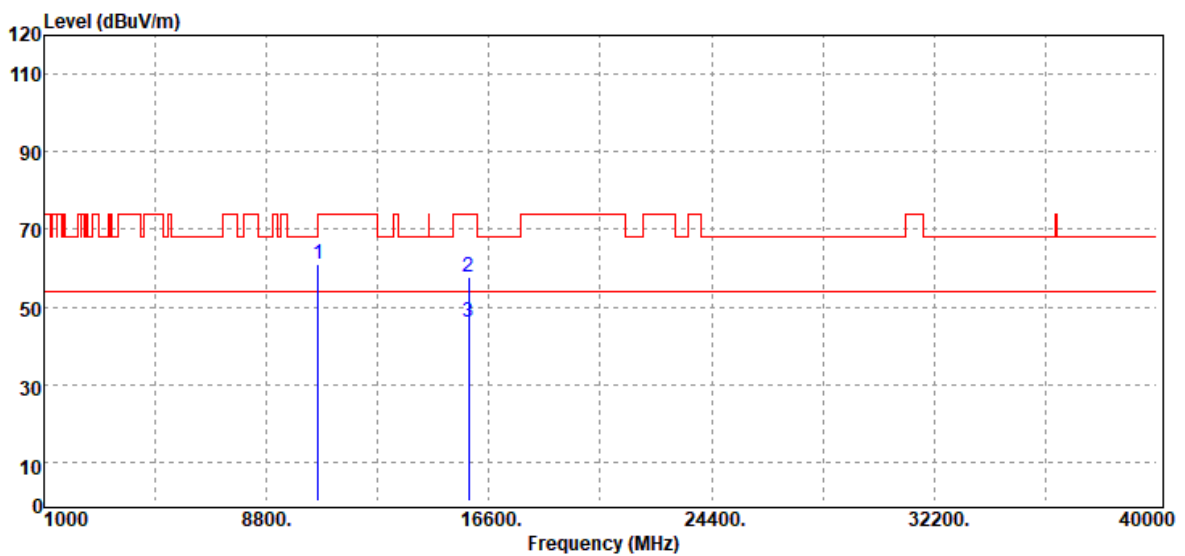

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10600.00	Peak	43.01	18.20	61.21	68.20	-6.99
15900.00	Peak	31.07	26.46	57.53	74.00	-16.47
15900.00	Average	19.80	26.46	46.26	54.00	-7.74
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

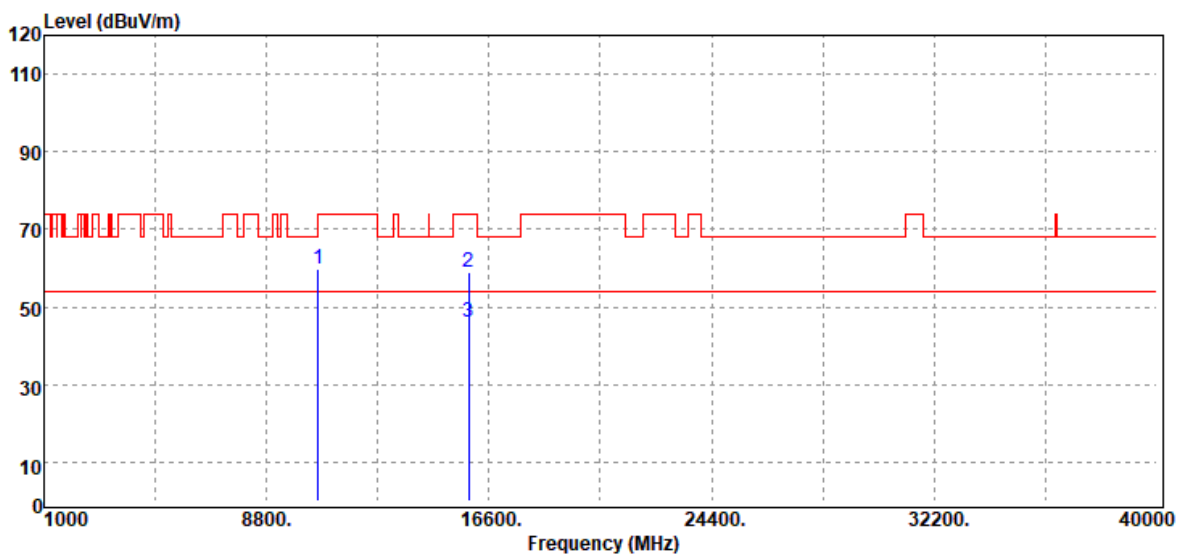


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	41.73	18.20	59.93	68.20	-8.27
15900.00	Peak	32.30	26.46	58.76	74.00	-15.24
15900.00	Average	19.76	26.46	46.22	54.00	-7.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

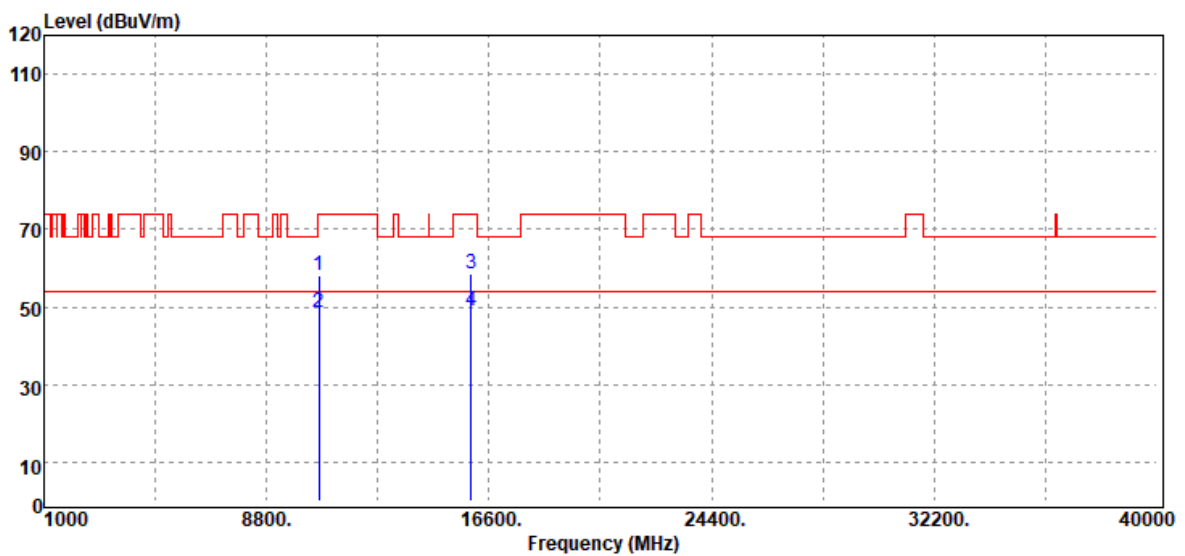


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	39.63	18.36	57.99	74.00	-16.01
10640.00	Average	30.07	18.36	48.43	54.00	-5.57
15960.00	Peak	31.54	26.84	58.38	74.00	-15.62
15960.00	Average	22.31	26.84	49.15	54.00	-4.85
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

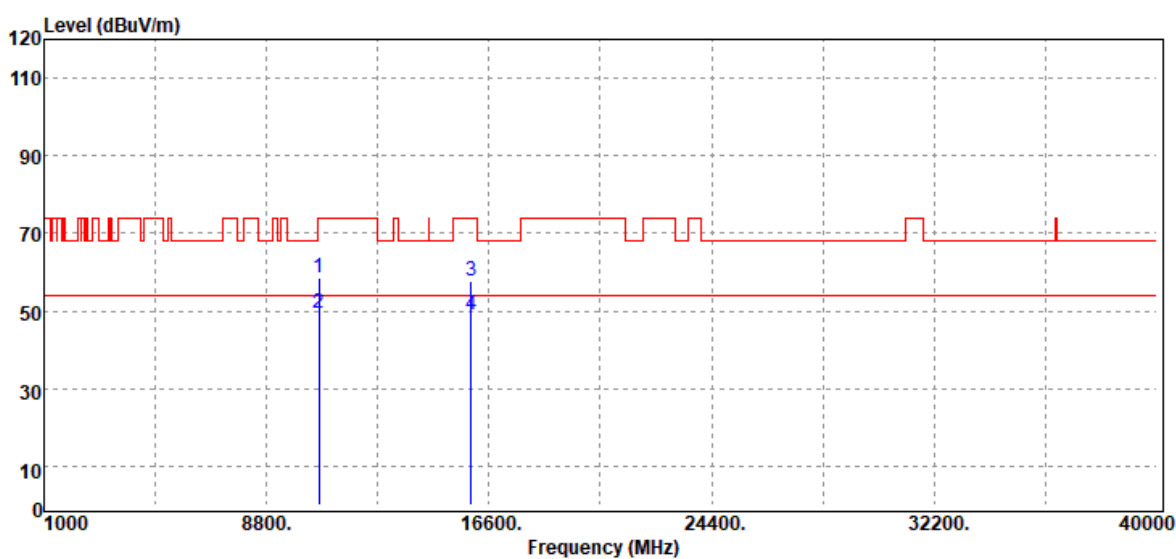


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	40.15	18.36	58.51	74.00	-15.49
10640.00	Average	31.01	18.36	49.37	54.00	-4.63
15960.00	Peak	30.96	26.84	57.80	74.00	-16.20
15960.00	Average	22.26	26.84	49.10	54.00	-4.90
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5260 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

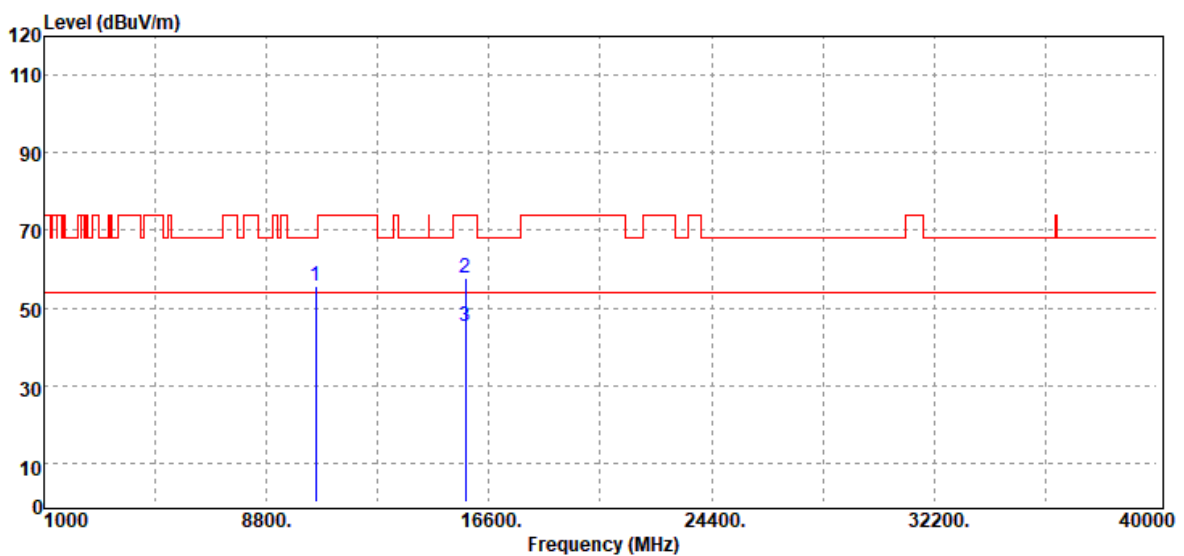


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	37.36	18.16	55.52	68.20	-12.68
15780.00	Peak	32.04	25.81	57.85	74.00	-16.15
15780.00	Average	19.59	25.81	45.40	54.00	-8.60
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5260 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

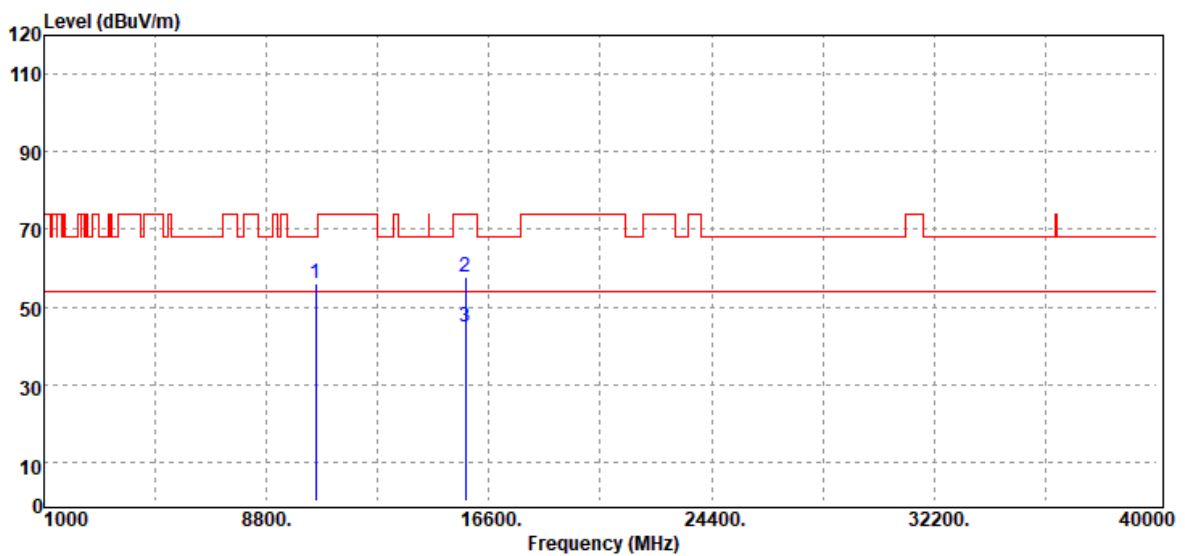


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	38.10	18.16	56.26	68.20	-11.94
15780.00	Peak	32.04	25.81	57.85	74.00	-16.15
15780.00	Average	19.22	25.81	45.03	54.00	-8.97
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5300 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

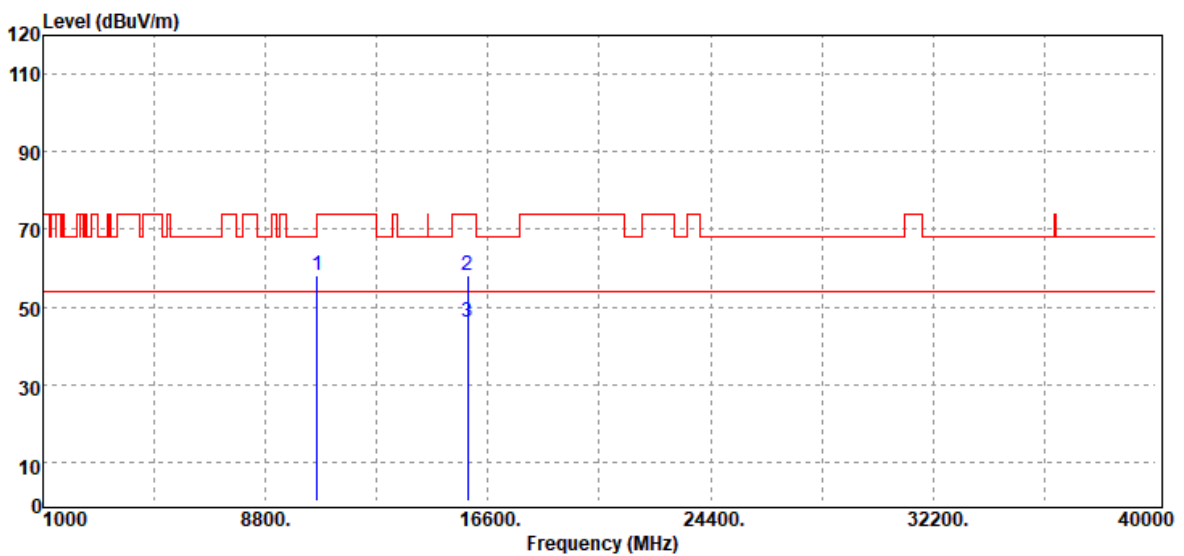


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10600.00	Peak	39.79	18.20	57.99	68.20	-10.21
15900.00	Peak	31.70	26.46	58.16	74.00	-15.84
15900.00	Average	19.73	26.46	46.19	54.00	-7.81
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5300 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

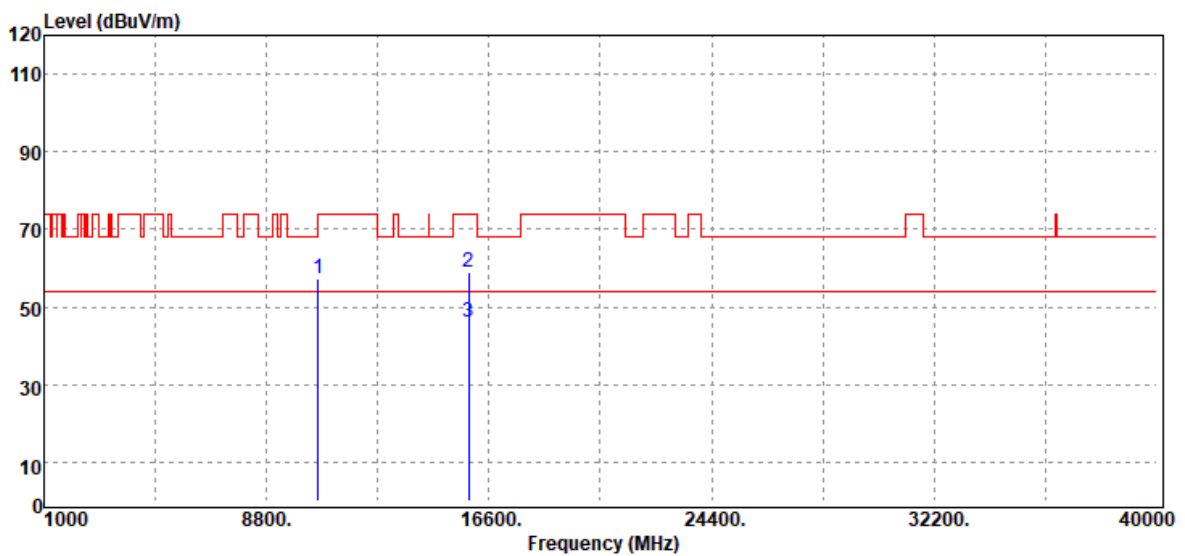


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	38.92	18.20	57.12	68.20	-11.08
15900.00	Peak	32.48	26.46	58.94	74.00	-15.06
15900.00	Average	19.65	26.46	46.11	54.00	-7.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5320 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

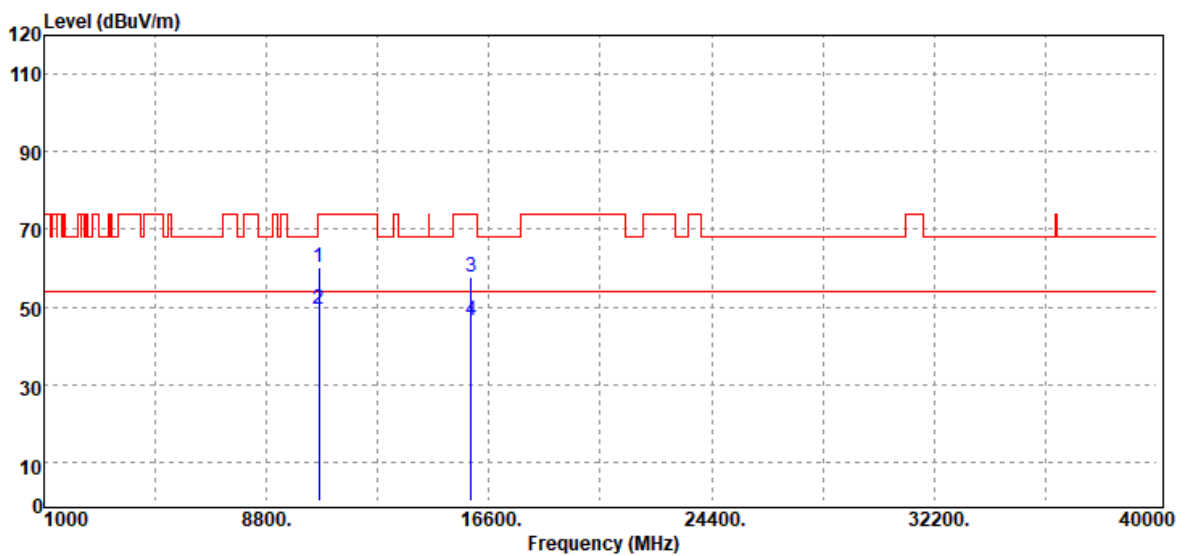

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	41.88	18.36	60.24	74.00	-13.76
10640.00	Average	30.89	18.36	49.25	54.00	-4.75
15960.00	Peak	30.93	26.84	57.77	74.00	-16.23
15960.00	Average	19.57	26.84	46.41	54.00	-7.59
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5320 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

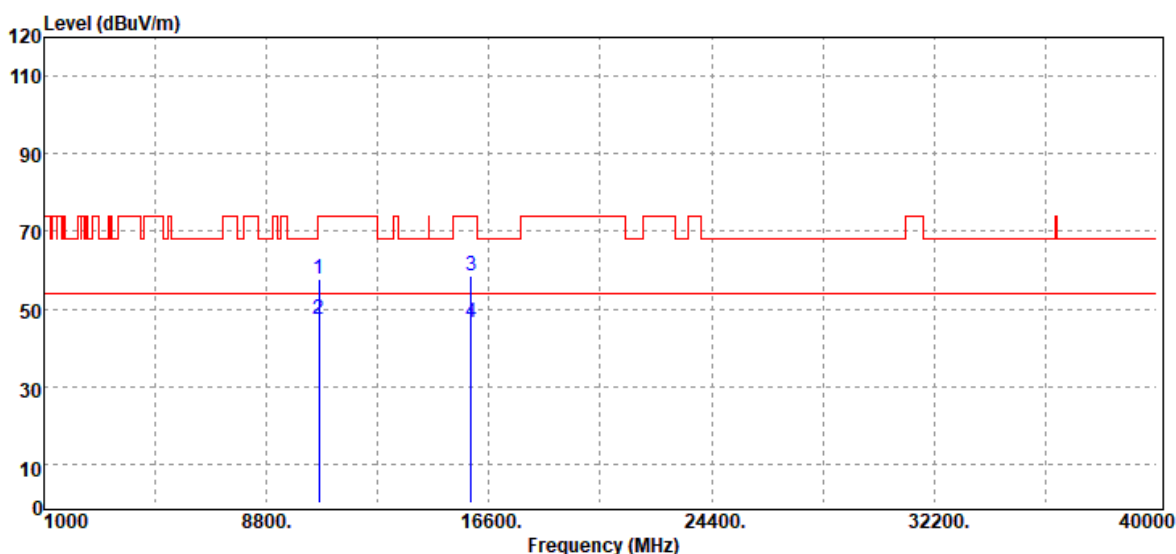


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	39.54	18.36	57.90	74.00	-16.10
10640.00	Average	28.91	18.36	47.27	54.00	-6.73
15960.00	Peak	31.55	26.84	58.39	74.00	-15.61
15960.00	Average	19.57	26.84	46.41	54.00	-7.59
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5270 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

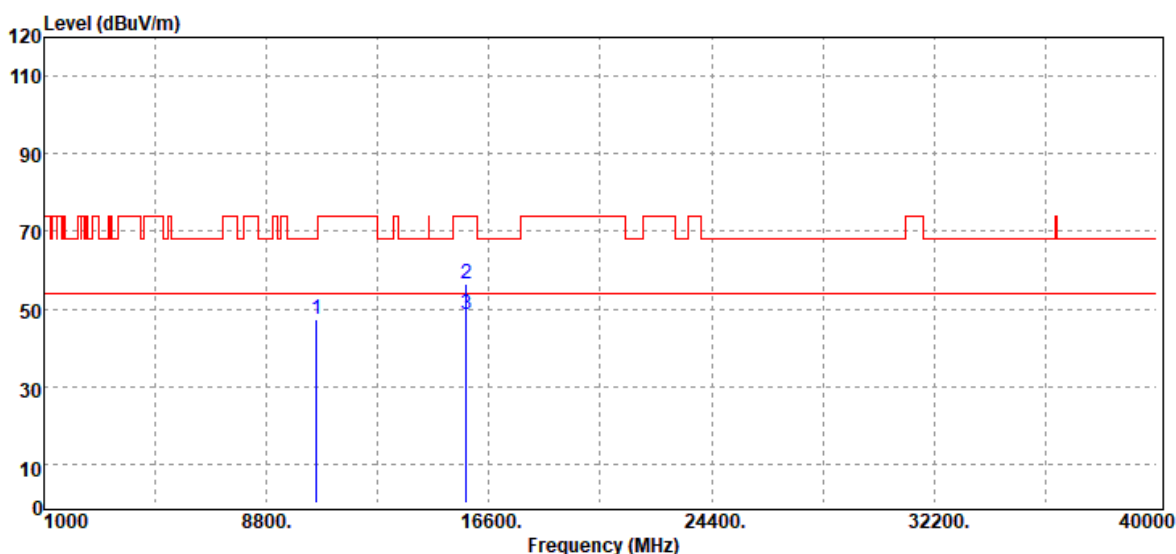


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	29.11	18.19	47.30	68.20	-20.90
15810.00	Peak	30.67	25.92	56.59	74.00	-17.41
15810.00	Average	22.54	25.92	48.46	54.00	-5.54
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5270 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

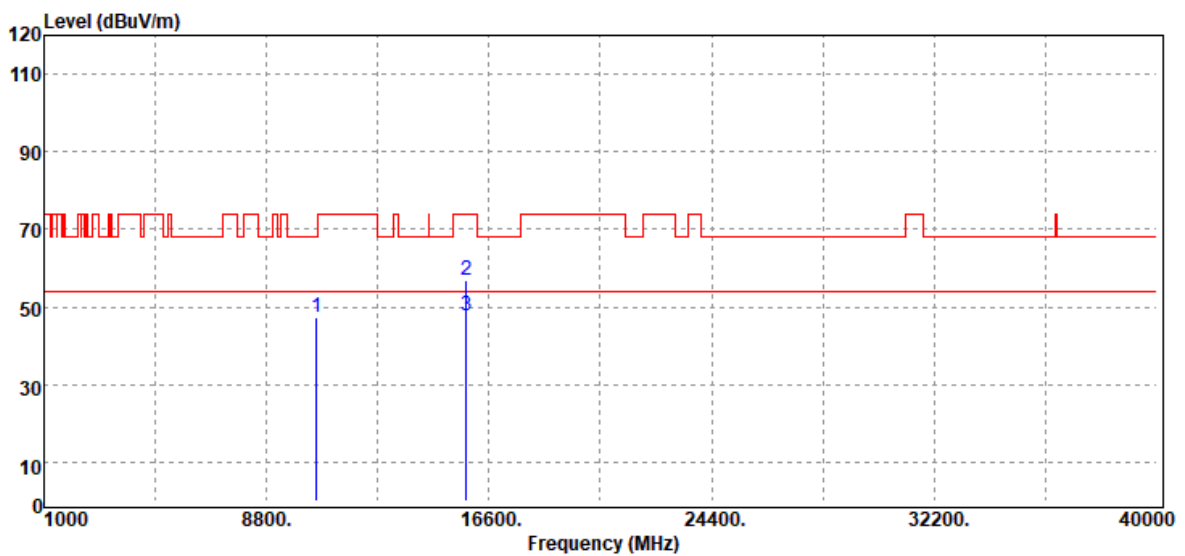


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	29.07	18.19	47.26	68.20	-20.94
15810.00	Peak	31.15	25.92	57.07	74.00	-16.93
15810.00	Average	21.78	25.92	47.70	54.00	-6.30
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5310 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

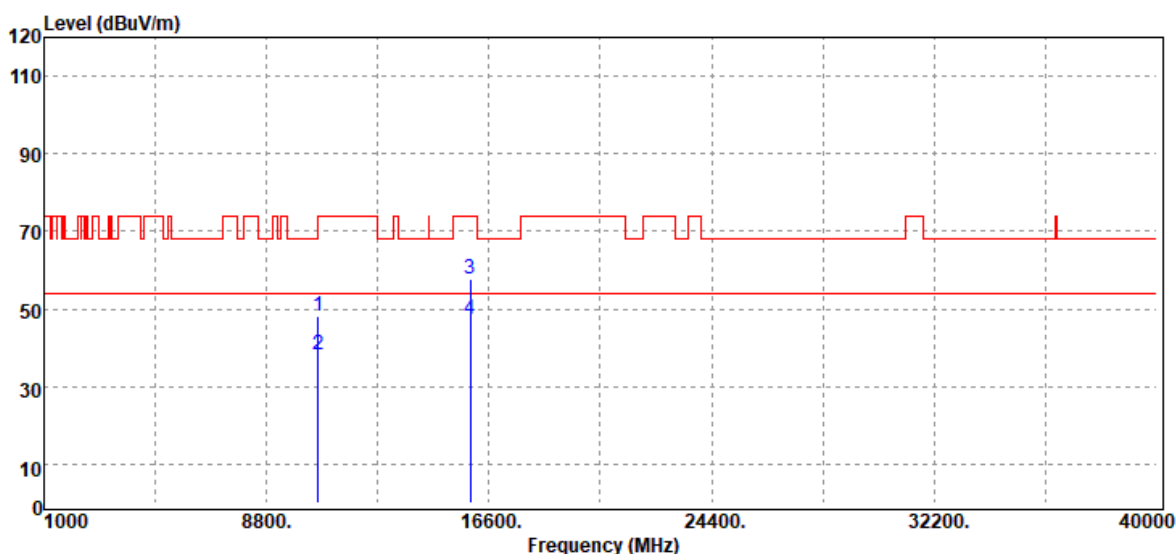


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	29.77	18.28	48.05	74.00	-25.95
10620.00	Average	19.90	18.28	38.18	54.00	-15.82
15930.00	Peak	31.25	26.63	57.88	74.00	-16.12
15930.00	Average	20.90	26.63	47.53	54.00	-6.47
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5310 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

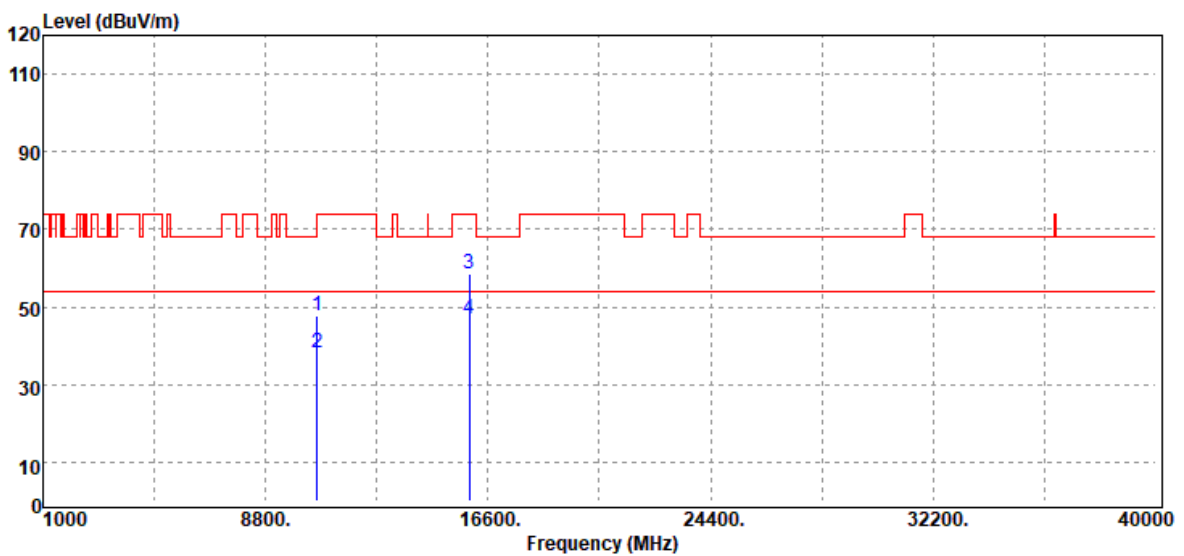


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	29.60	18.28	47.88	74.00	-26.12
10620.00	Average	19.94	18.28	38.22	54.00	-15.78
15930.00	Peak	31.72	26.63	58.35	74.00	-15.65
15930.00	Average	20.48	26.63	47.11	54.00	-6.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

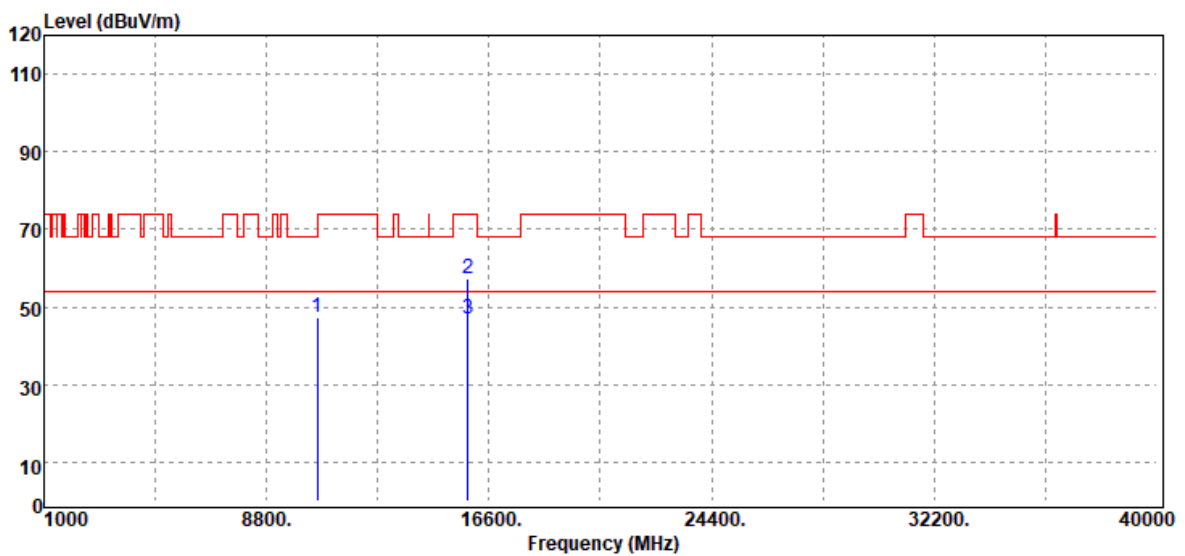


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10580.00	Peak	29.23	18.20	47.43	68.20	-20.77
15870.00	Peak	31.24	26.22	57.46	74.00	-16.54
15870.00	Average	20.90	26.22	47.12	54.00	-6.88
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

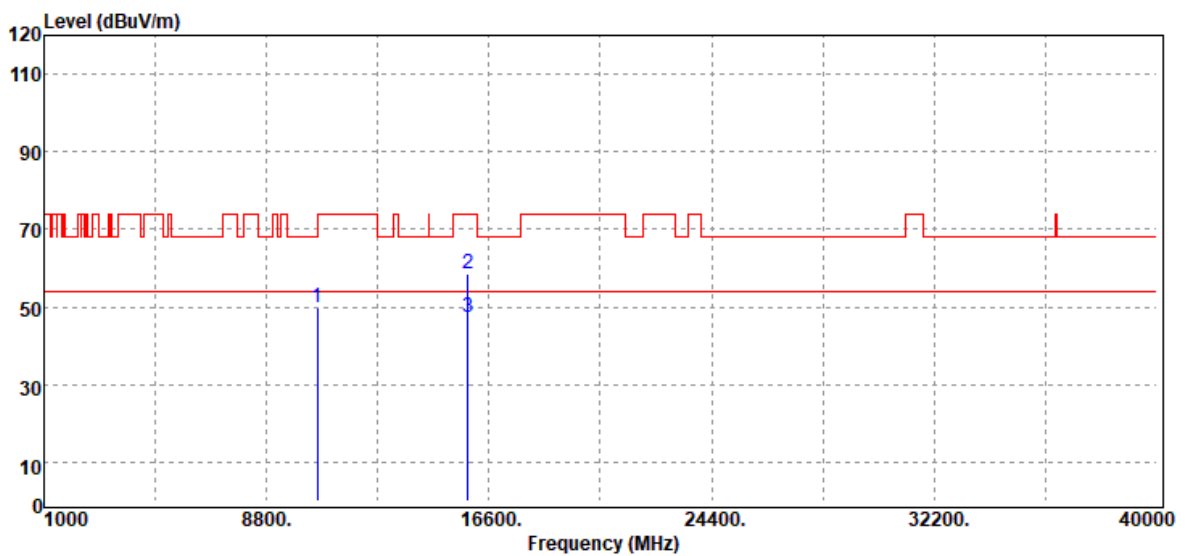


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	31.45	18.20	49.65	68.20	-18.55
15870.00	Peak	32.17	26.22	58.39	74.00	-15.61
15870.00	Average	21.13	26.22	47.35	54.00	-6.65
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5260 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

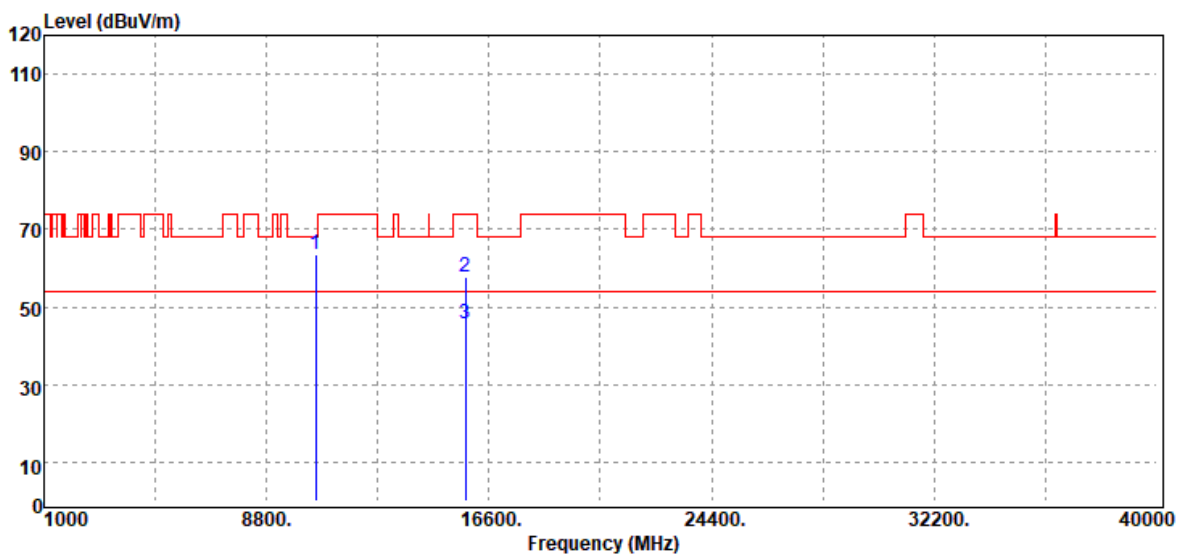

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10520.00	Peak	45.39	18.16	63.55	68.20	-4.65
15780.00	Peak	31.92	25.81	57.73	74.00	-16.27
15780.00	Average	19.74	25.81	45.55	54.00	-8.45
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5260 MHz_106/53	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

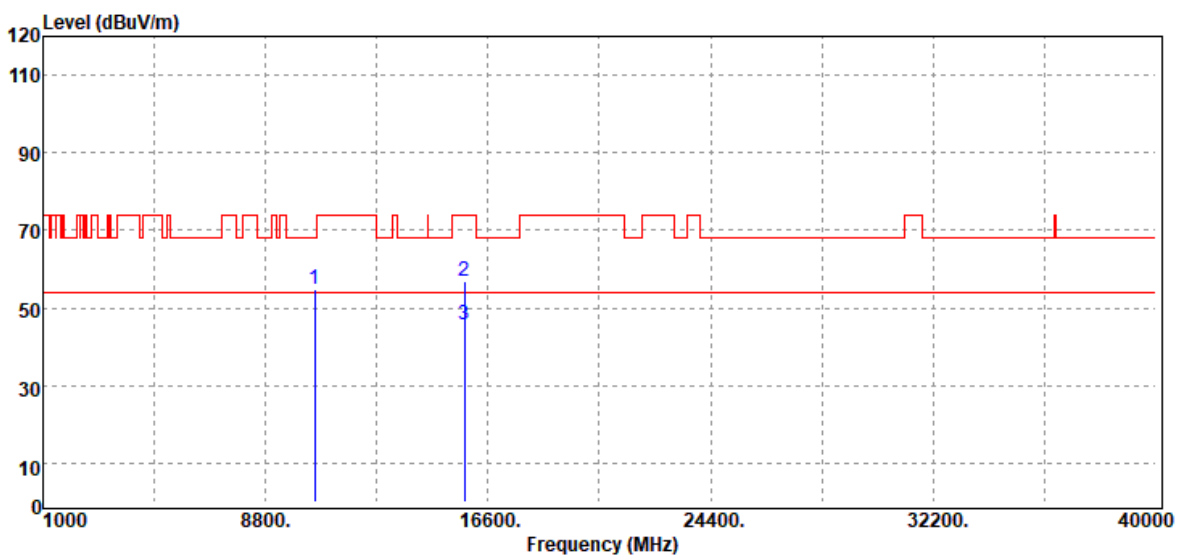

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	36.55	18.16	54.71	68.20	-13.49
15780.00	Peak	30.98	25.81	56.79	74.00	-17.21
15780.00	Average	19.67	25.81	45.48	54.00	-8.52
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5300 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	48.12	18.20	66.32	68.20	-1.88
15900.00	Peak	32.31	26.46	58.77	74.00	-15.23
15900.00	Average	19.78	26.46	46.24	54.00	-7.76
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5300 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

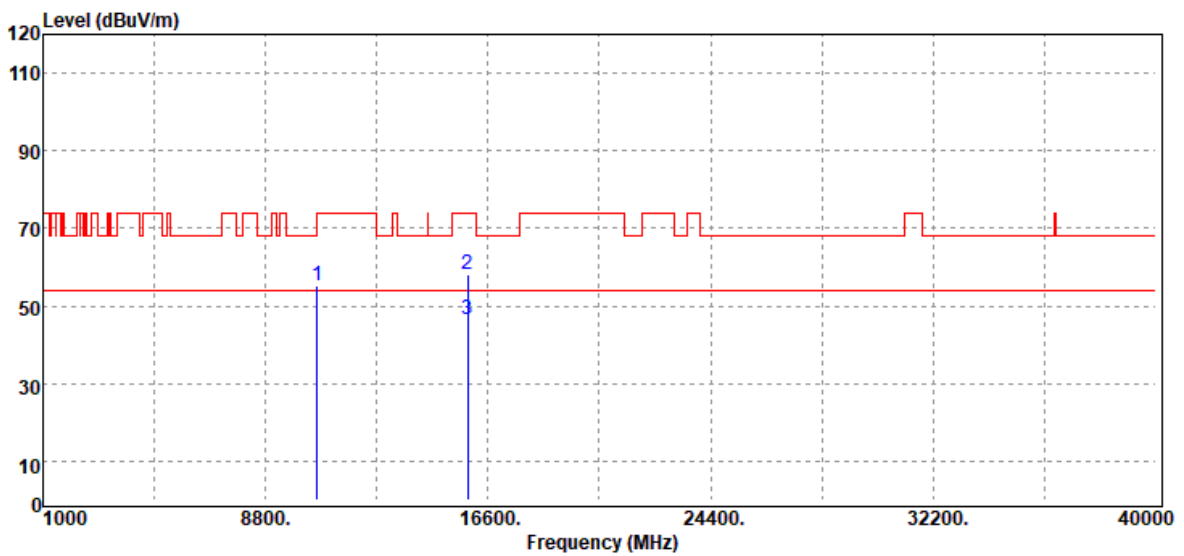


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	37.21	18.20	55.41	68.20	-12.79
15900.00	Peak	31.67	26.46	58.13	74.00	-15.87
15900.00	Average	19.91	26.46	46.37	54.00	-7.63
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

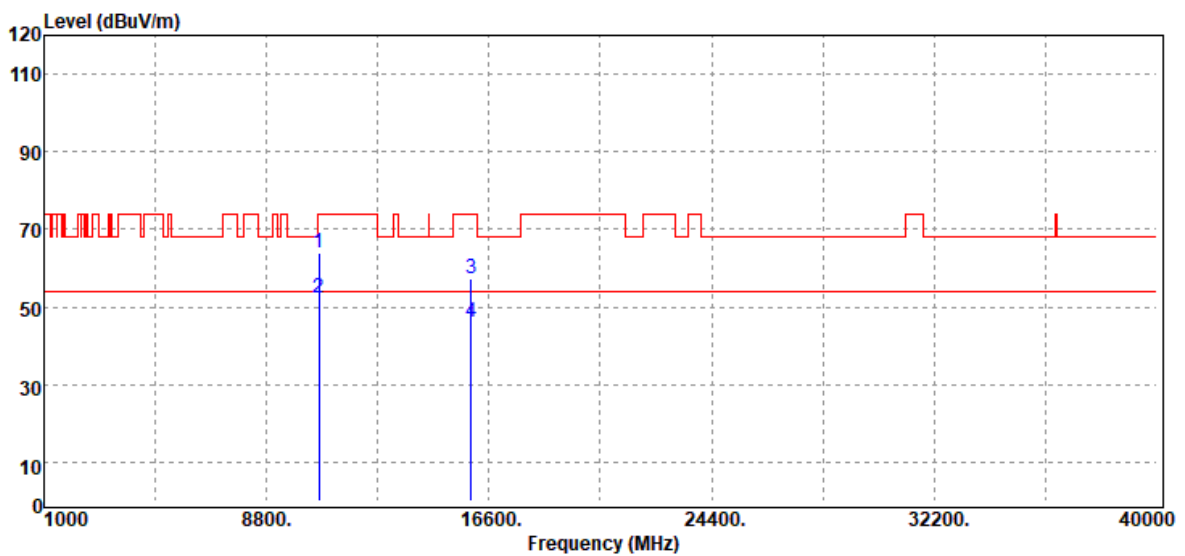


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	45.58	18.36	63.94	74.00	-10.06
10640.00	Average	33.92	18.36	52.28	54.00	-1.72
15960.00	Peak	30.42	26.84	57.26	74.00	-16.74
15960.00	Average	19.24	26.84	46.08	54.00	-7.92
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_26/8	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

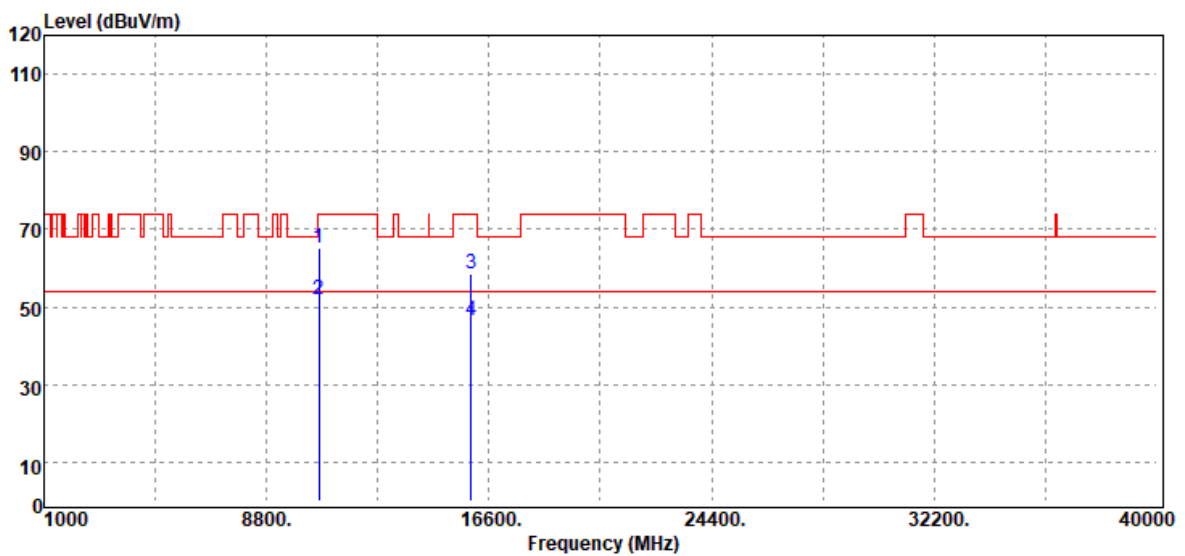


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10640.00	Peak	46.94	18.36	65.30	74.00	-8.70
10640.00	Average	33.62	18.36	51.98	54.00	-2.02
15960.00	Peak	31.86	26.84	58.70	74.00	-15.30
15960.00	Average	19.81	26.84	46.65	54.00	-7.35
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

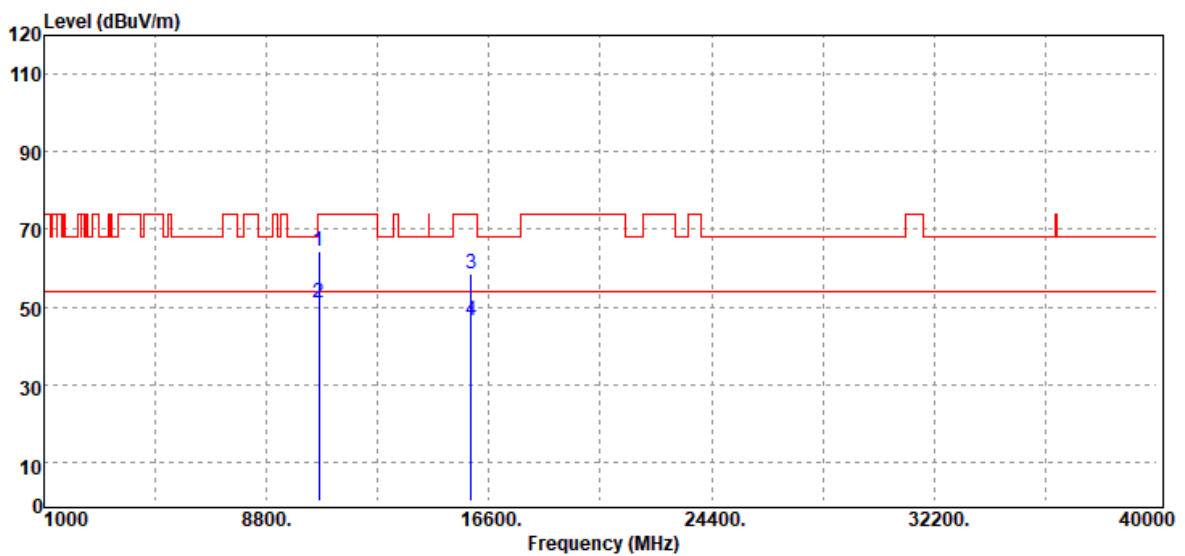


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	46.11	18.36	64.47	74.00	-9.53
10640.00	Average	32.92	18.36	51.28	54.00	-2.72
15960.00	Peak	31.63	26.84	58.47	74.00	-15.53
15960.00	Average	19.81	26.84	46.65	54.00	-7.35
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_52/40	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

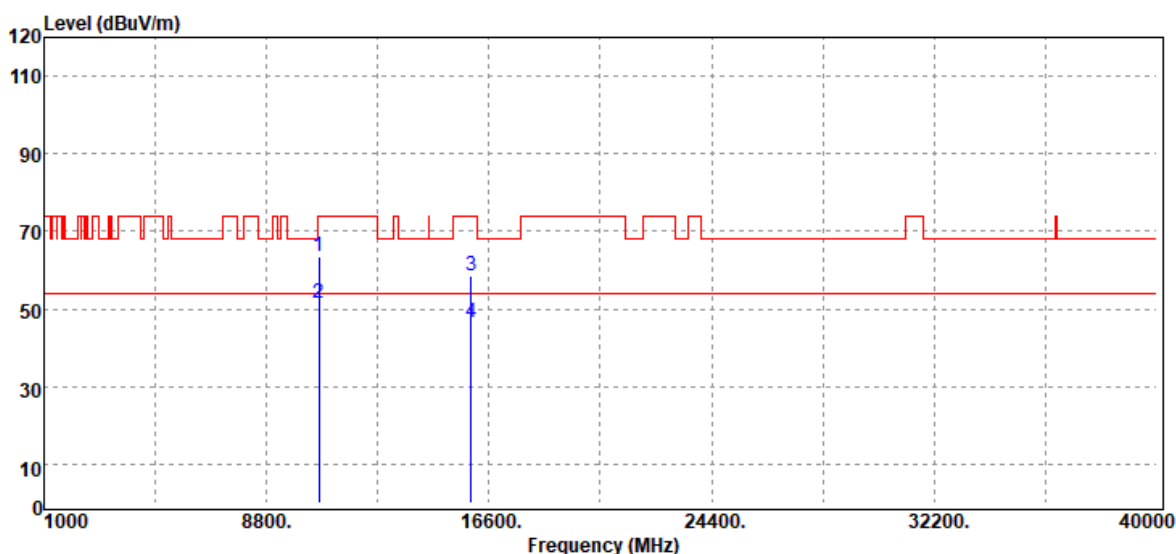


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	45.24	18.36	63.60	74.00	-10.40
10640.00	Average	33.09	18.36	51.45	54.00	-2.55
15960.00	Peak	31.56	26.84	58.40	74.00	-15.60
15960.00	Average	19.70	26.84	46.54	54.00	-7.46
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

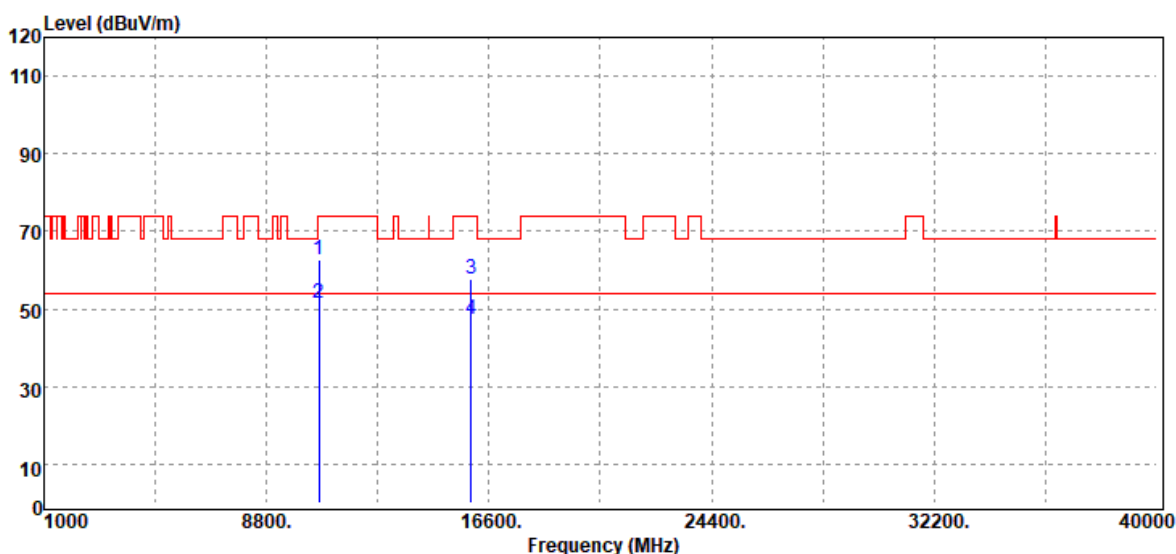

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	44.38	18.36	62.74	74.00	-11.26
10640.00	Average	33.07	18.36	51.43	54.00	-2.57
15960.00	Peak	31.05	26.84	57.89	74.00	-16.11
15960.00	Average	20.68	26.84	47.52	54.00	-6.48
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5320 MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

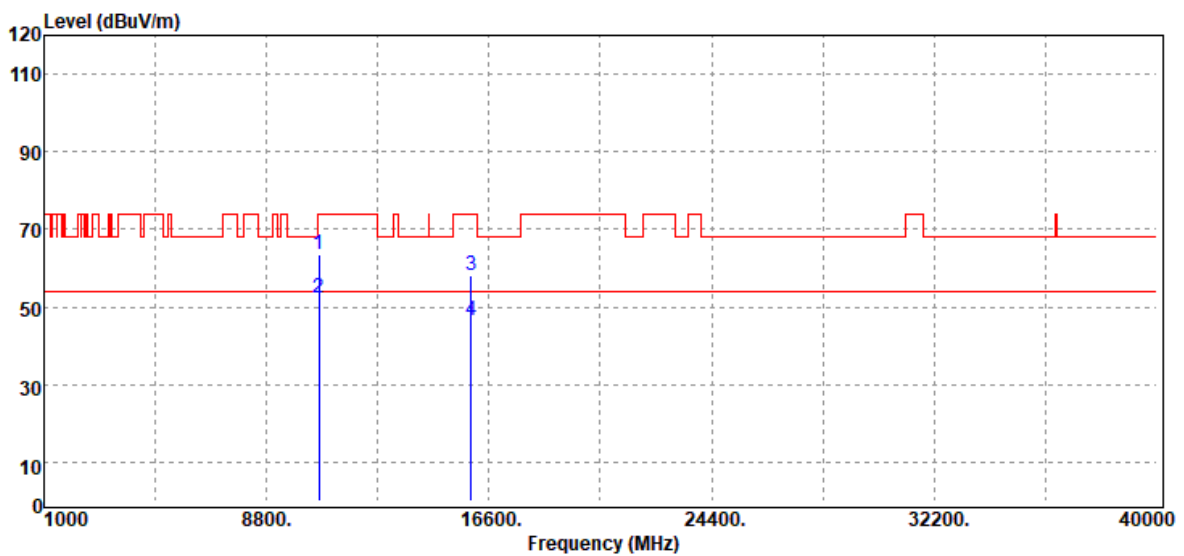


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	45.24	18.36	63.60	74.00	-10.40
10640.00	Average	34.15	18.36	52.51	54.00	-1.49
15960.00	Peak	31.44	26.84	58.28	74.00	-15.72
15960.00	Average	19.79	26.84	46.63	54.00	-7.37
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5270 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

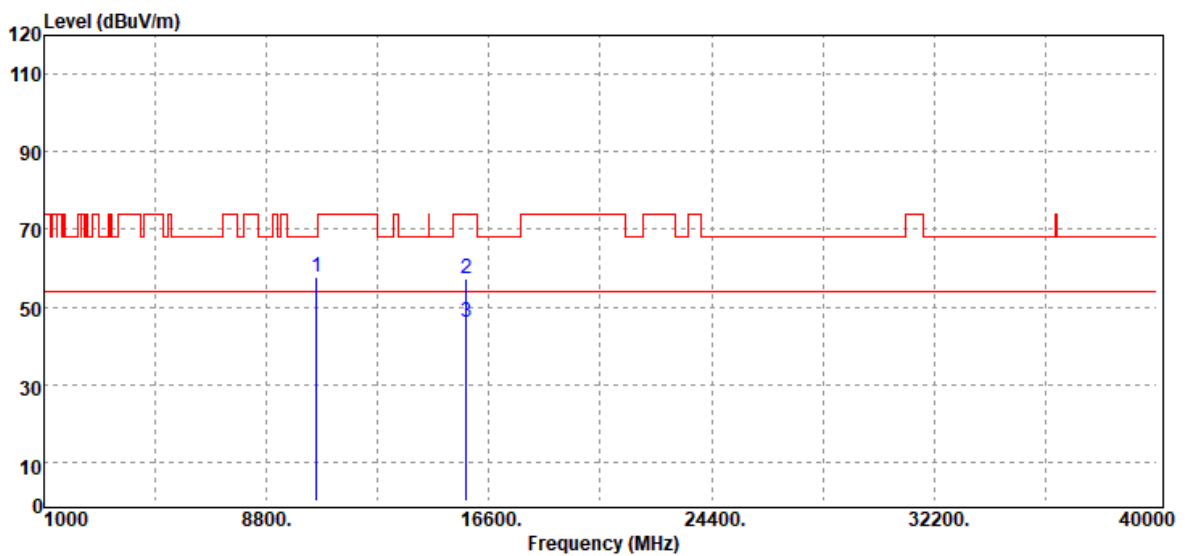


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
10540.00	Peak	39.35	18.19	57.54	68.20	-10.66
15810.00	Peak	31.55	25.92	57.47	74.00	-16.53
15810.00	Average	20.08	25.92	46.00	54.00	-8.00
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5270 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

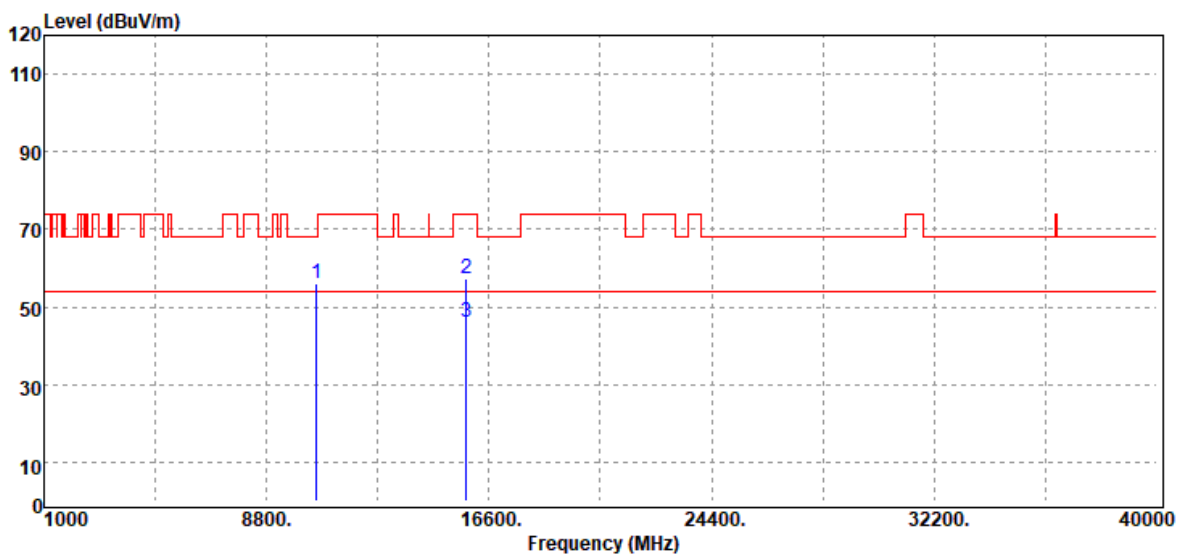


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10540.00	Peak	37.94	18.19	56.13	68.20	-12.07
15810.00	Peak	31.58	25.92	57.50	74.00	-16.50
15810.00	Average	20.16	25.92	46.08	54.00	-7.92
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

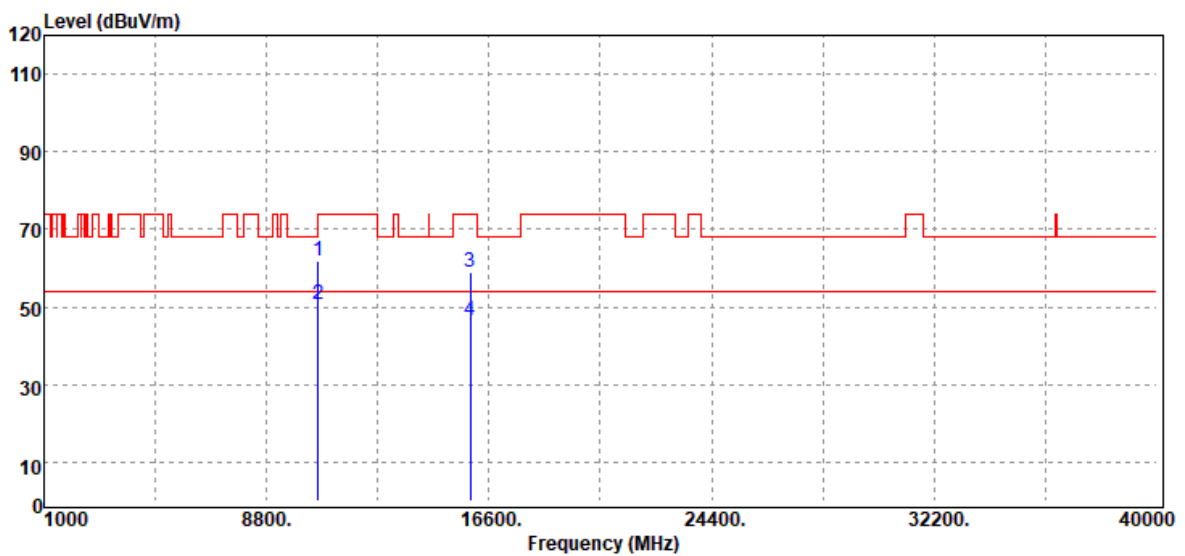


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	43.55	18.28	61.83	74.00	-12.17
10620.00	Average	32.57	18.28	50.85	54.00	-3.15
15930.00	Peak	32.16	26.63	58.79	74.00	-15.21
15930.00	Average	19.90	26.63	46.53	54.00	-7.47
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5310 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

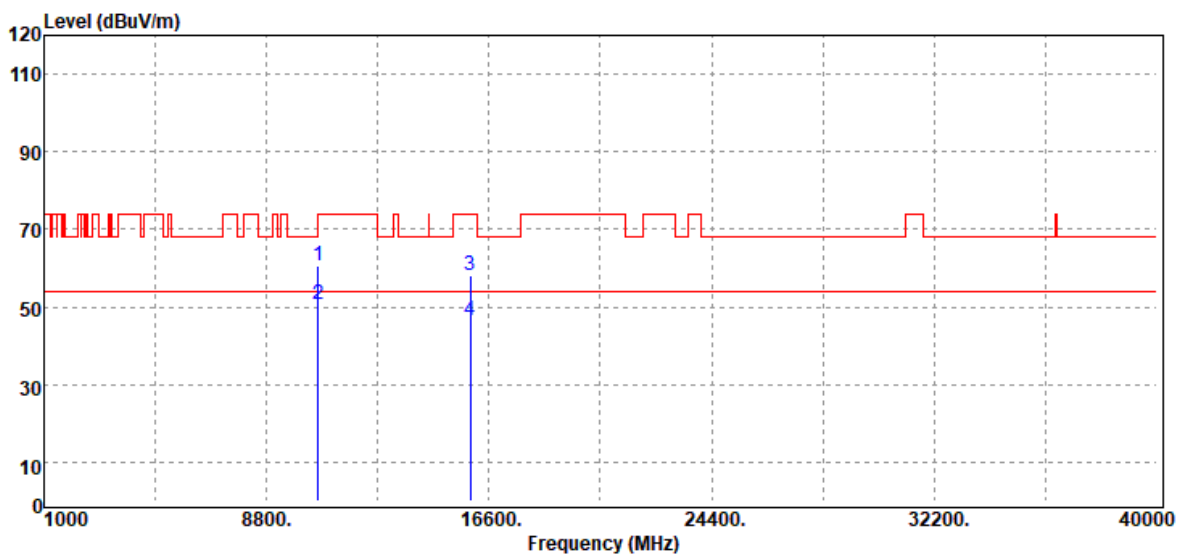


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	42.30	18.28	60.58	74.00	-13.42
10620.00	Average	32.22	18.28	50.50	54.00	-3.50
15930.00	Peak	31.59	26.63	58.22	74.00	-15.78
15930.00	Average	19.70	26.63	46.33	54.00	-7.67
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

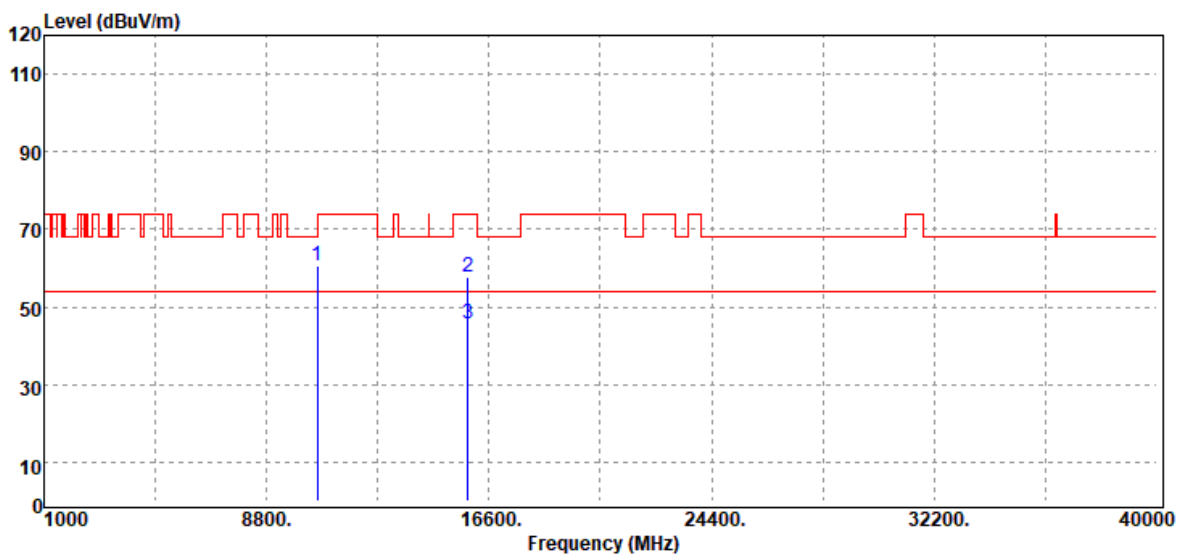

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	42.54	18.20	60.74	68.20	-7.46
15870.00	Peak	31.38	26.22	57.60	74.00	-16.40
15870.00	Average	19.49	26.22	45.71	54.00	-8.29
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5290 MHz_106/60	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		



Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10580.00	Peak	41.89	18.20	60.09	68.20	-8.11
15870.00	Peak	31.82	26.22	58.04	74.00	-15.96
15870.00	Average	19.86	26.22	46.08	54.00	-7.92
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

**Test Data for UNII-2c (Beamforming Mode)**

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.3(°C)/ 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

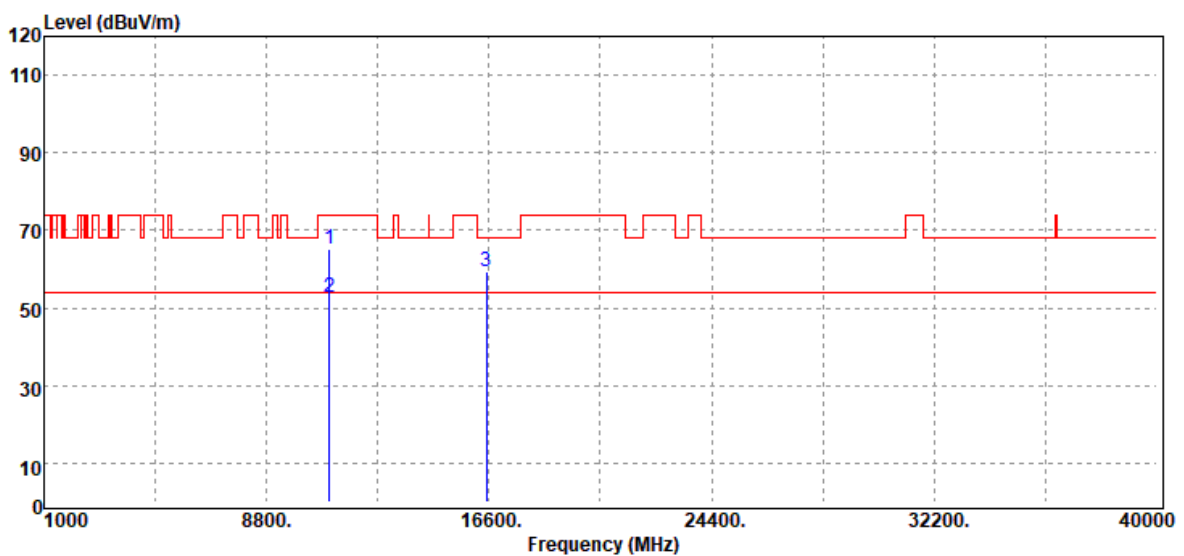

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	45.99	19.04	65.03	74.00	-8.97
11000.00	Average	33.88	19.04	52.92	54.00	-1.08
16500.00	Peak	30.52	29.02	59.54	68.20	-8.66
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

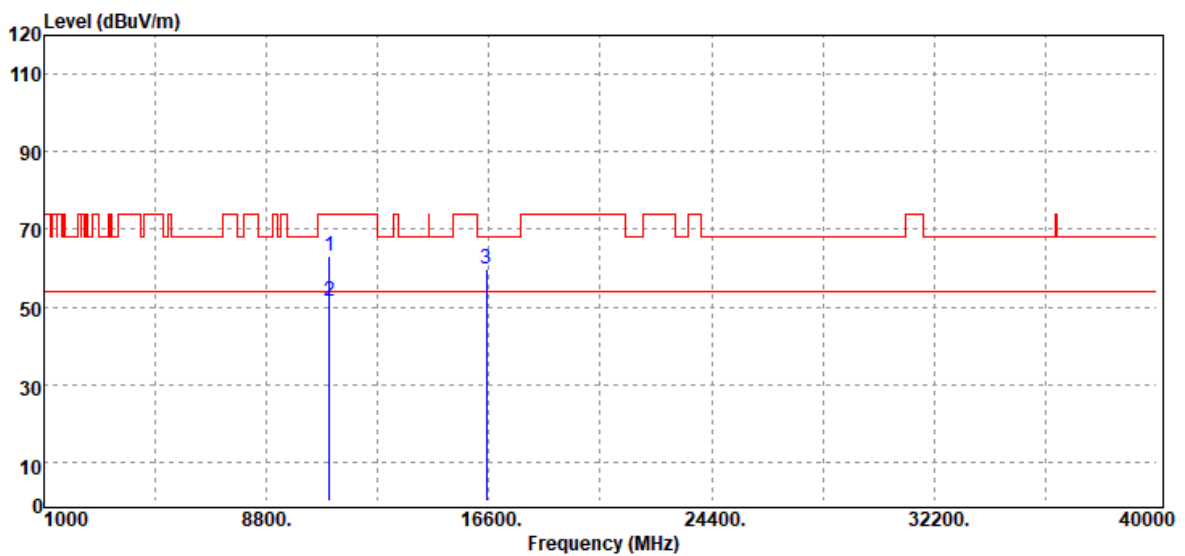


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	44.04	19.04	63.08	74.00	-10.92
11000.00	Average	32.40	19.04	51.44	54.00	-2.56
16500.00	Peak	30.96	29.02	59.98	68.20	-8.22
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonics	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

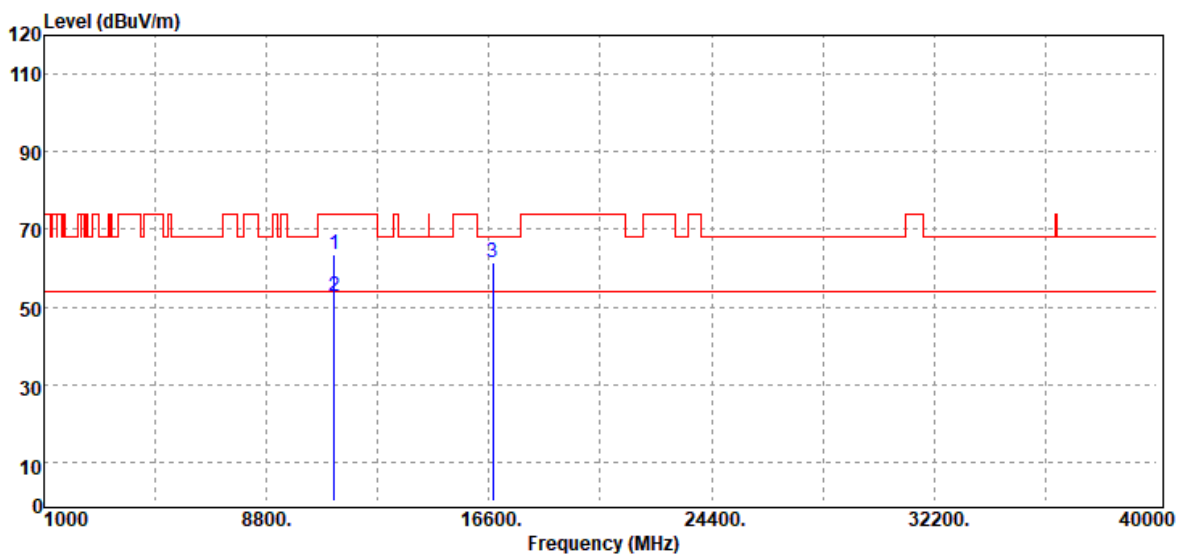


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	44.20	19.23	63.43	74.00	-10.57
11160.00	Average	33.55	19.23	52.78	54.00	-1.22
16740.00	Peak	31.16	30.21	61.37	68.20	-6.83
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

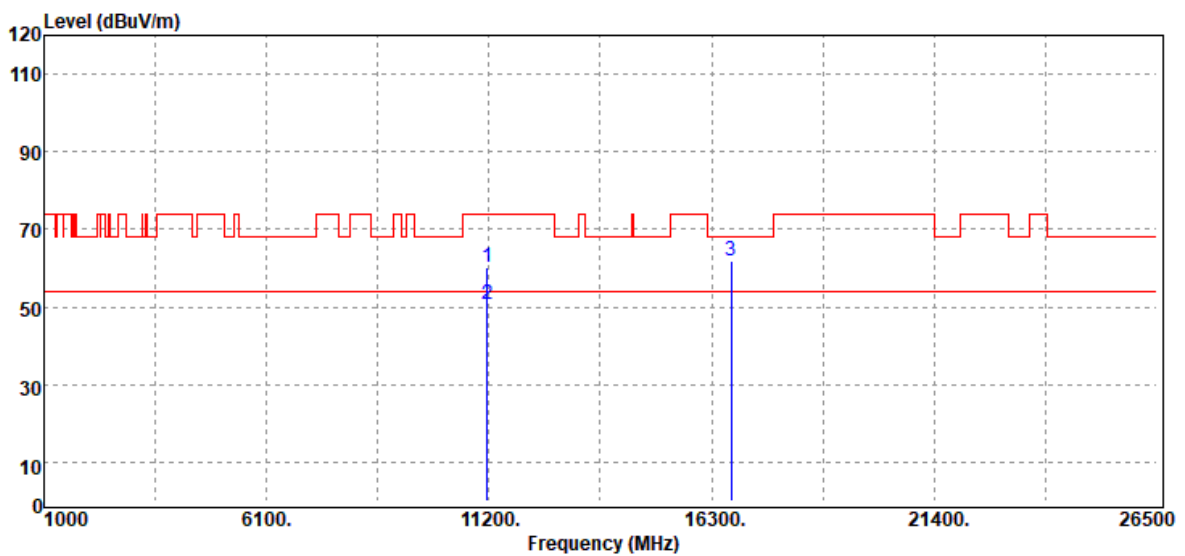

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	40.96	19.23	60.19	74.00	-13.81
11160.00	Average	31.22	19.23	50.45	54.00	-3.55
16740.00	Peak	31.72	30.21	61.93	68.20	-6.27
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	39.33	19.58	58.91	74.00	-15.09
11400.00	Average	29.92	19.58	49.50	54.00	-4.50
17100.00	Peak	30.74	31.23	61.97	68.20	-6.23
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

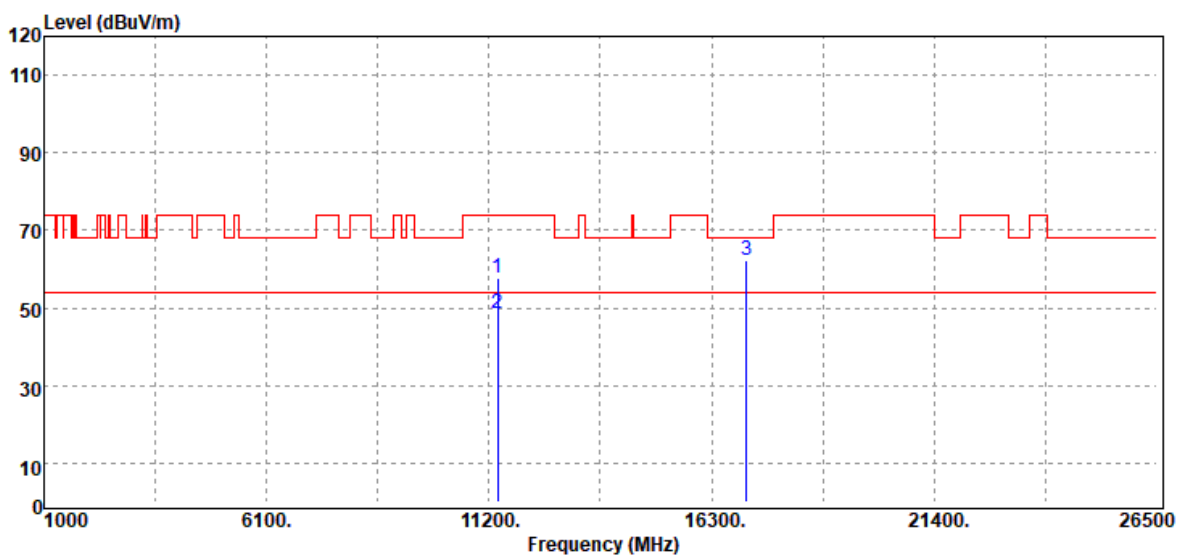


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	38.32	19.58	57.90	74.00	-16.10
11400.00	Average	28.93	19.58	48.51	54.00	-5.49
17100.00	Peak	31.13	31.23	62.36	68.20	-5.84
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5500 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

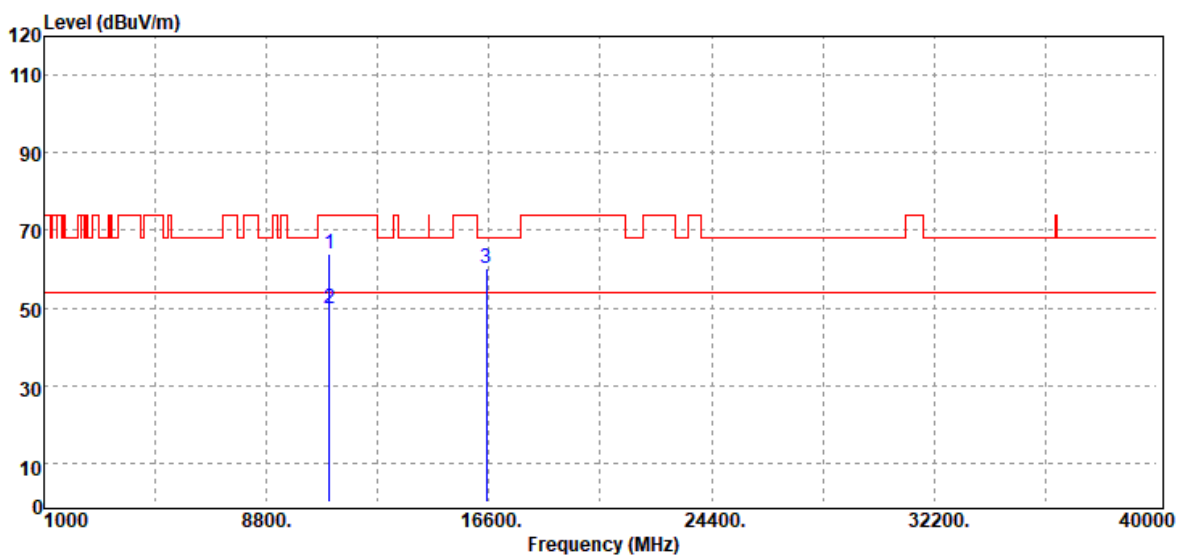


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	44.73	19.04	63.77	74.00	-10.23
11000.00	Average	30.92	19.04	49.96	54.00	-4.04
16500.00	Peak	31.12	29.02	60.14	68.20	-8.06
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5500 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

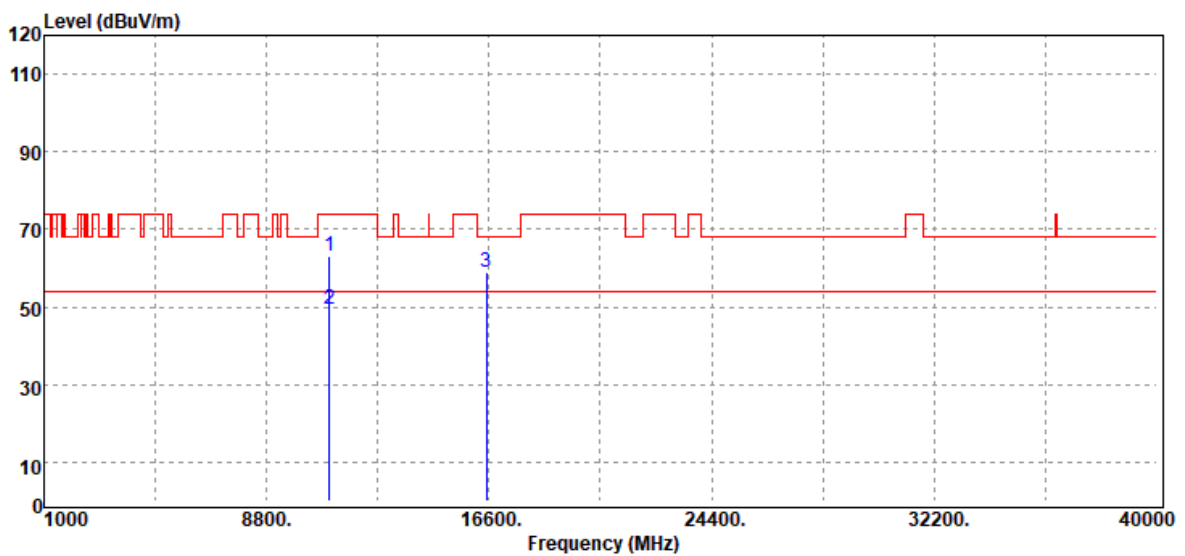


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
11000.00	Peak	44.25	19.04	63.29	74.00	-10.71
11000.00	Average	30.37	19.04	49.41	54.00	-4.59
16500.00	Peak	29.93	29.02	58.95	68.20	-9.25
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5580 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

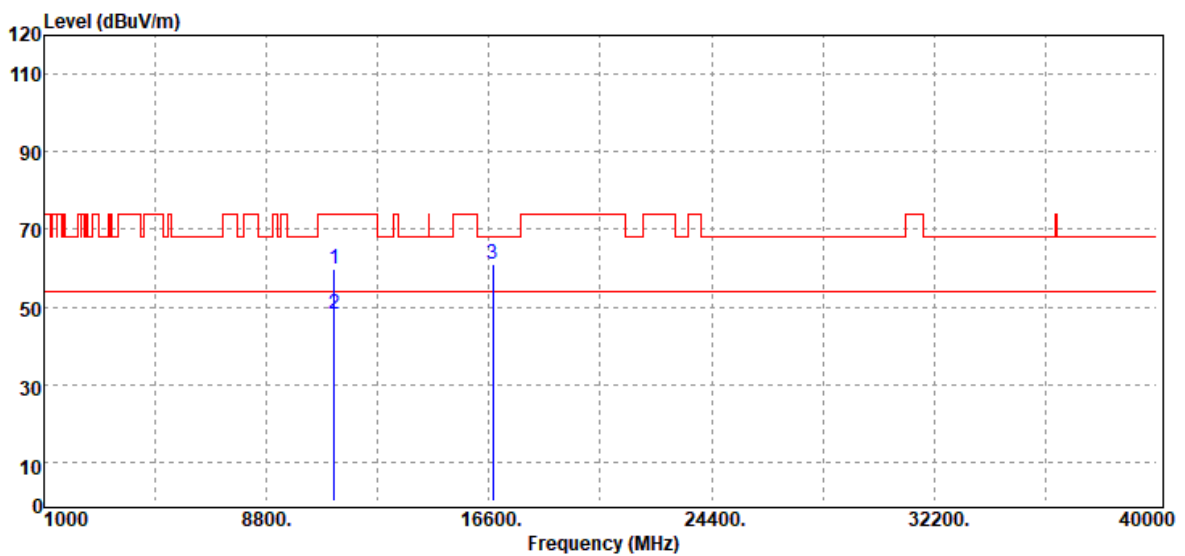

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11160.00	Peak	40.50	19.23	59.73	74.00	-14.27
11160.00	Average	28.74	19.23	47.97	54.00	-6.03
16740.00	Peak	30.88	30.21	61.09	68.20	-7.11
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5580 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

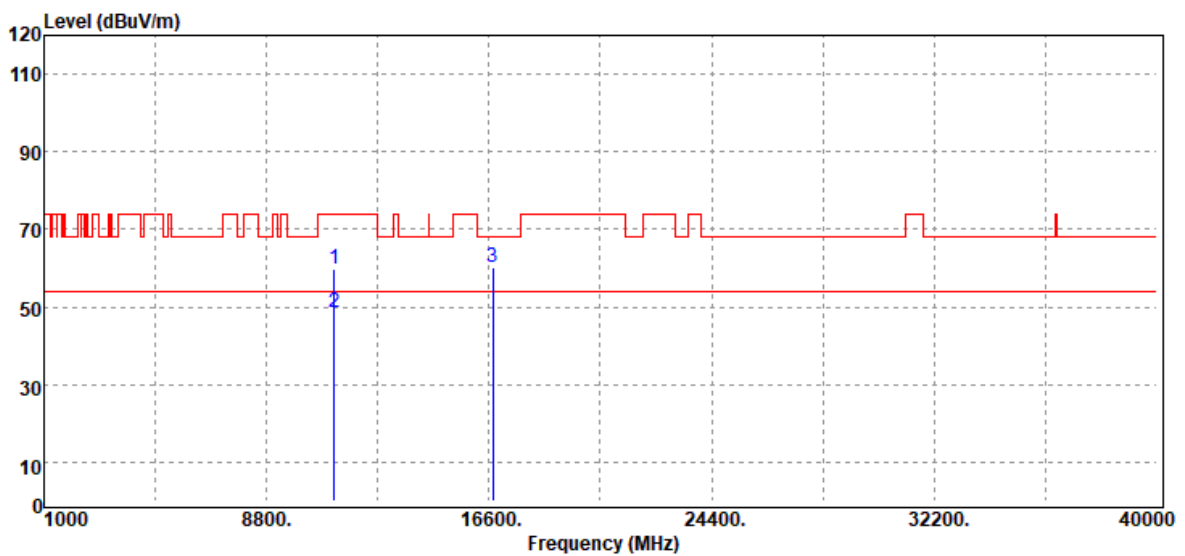


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	40.46	19.23	59.69	74.00	-14.31
11160.00	Average	29.28	19.23	48.51	54.00	-5.49
16740.00	Peak	29.99	30.21	60.20	68.20	-8.00
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5700 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

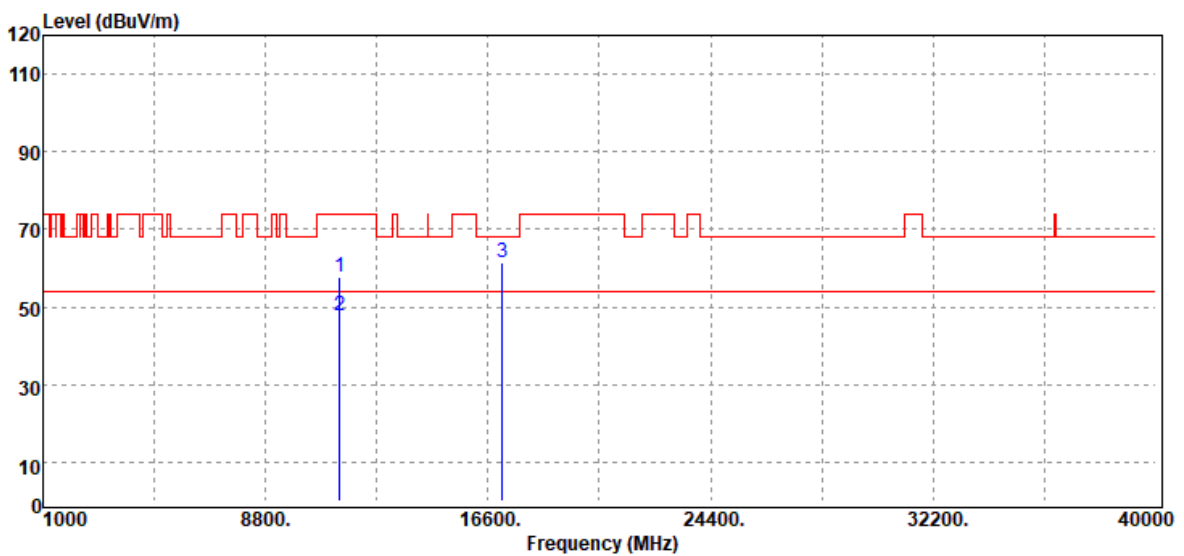


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	38.03	19.58	57.61	74.00	-16.39
11400.00	Average	28.17	19.58	47.75	54.00	-6.25
17100.00	Peak	30.18	31.23	61.41	68.20	-6.79
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5700 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

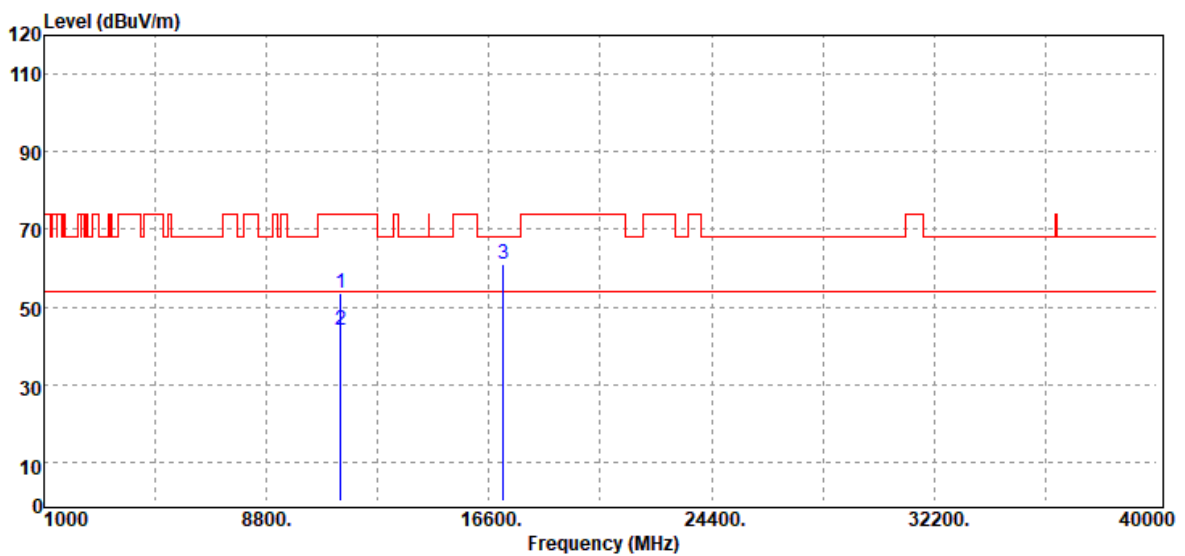


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11400.00	Peak	33.96	19.58	53.54	74.00	-20.46
11400.00	Average	24.51	19.58	44.09	54.00	-9.91
17100.00	Peak	29.76	31.23	60.99	68.20	-7.21
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5510 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

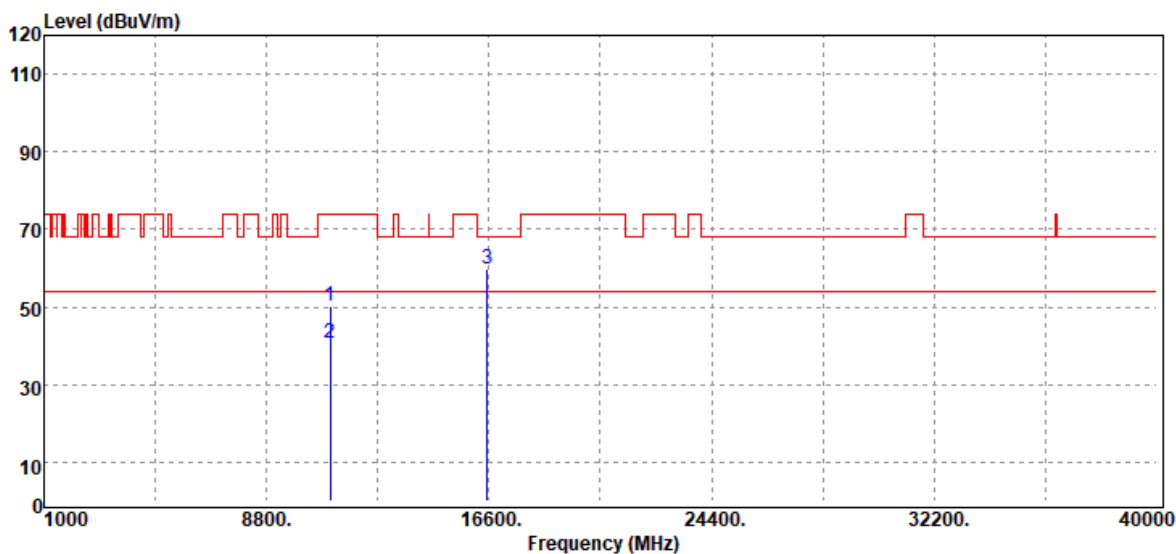


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	31.36	19.00	50.36	74.00	-23.64
11020.00	Average	21.79	19.00	40.79	54.00	-13.21
16530.00	Peak	30.74	28.97	59.71	68.20	-8.49
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

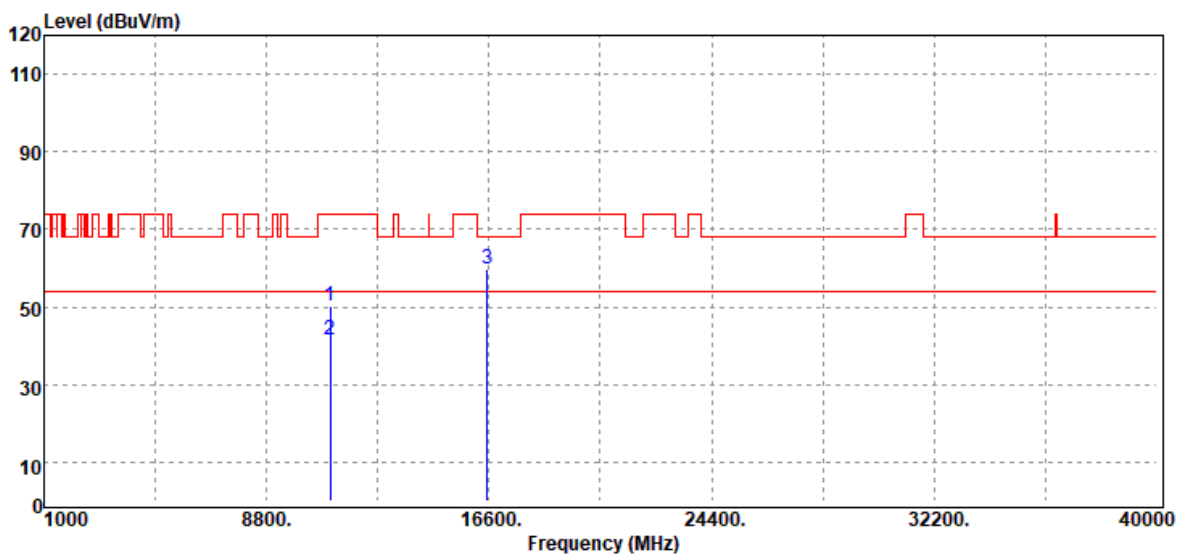


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	31.41	19.00	50.41	74.00	-23.59
11020.00	Average	22.56	19.00	41.56	54.00	-12.44
16530.00	Peak	30.97	28.97	59.94	68.20	-8.26
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5550 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

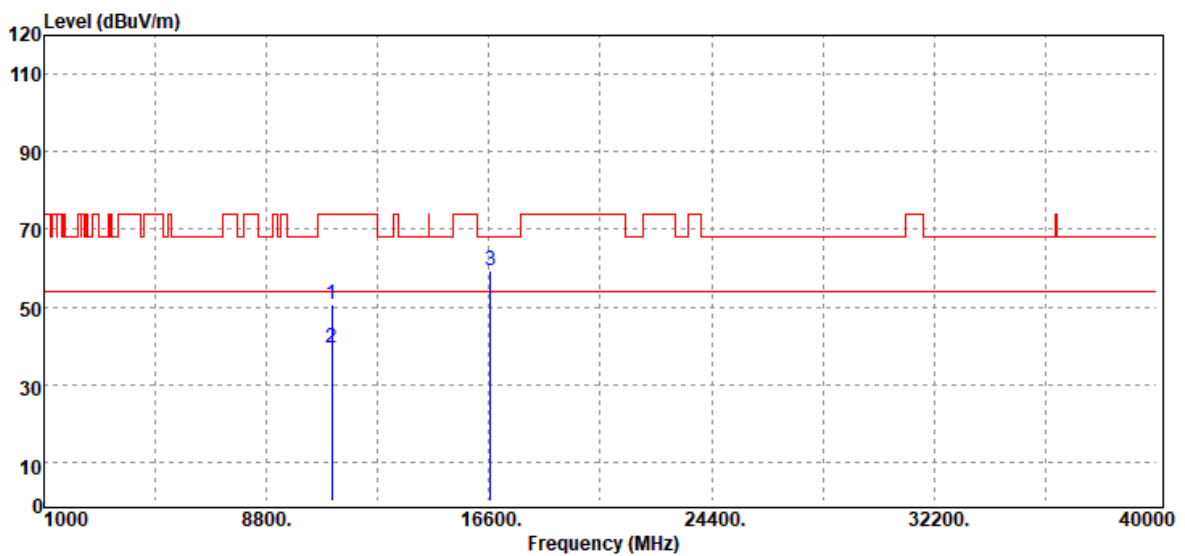


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.00	Peak	31.63	19.11	50.74	74.00	-23.26
11100.00	Average	20.19	19.11	39.30	54.00	-14.70
16650.00	Peak	30.17	29.28	59.45	68.20	-8.75
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5550 MHz	Temp/Hum	21.1(°C) / 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

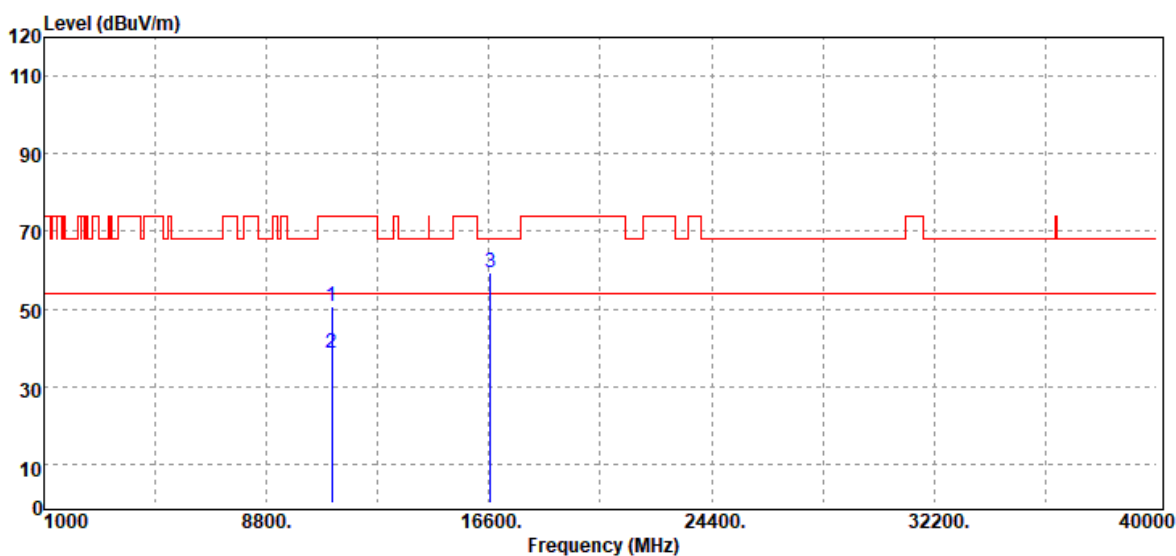


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11100.00	Peak	31.50	19.11	50.61	74.00	-23.39
11100.00	Average	19.30	19.11	38.41	54.00	-15.59
16650.00	Peak	30.29	29.28	59.57	68.20	-8.63
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5670 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

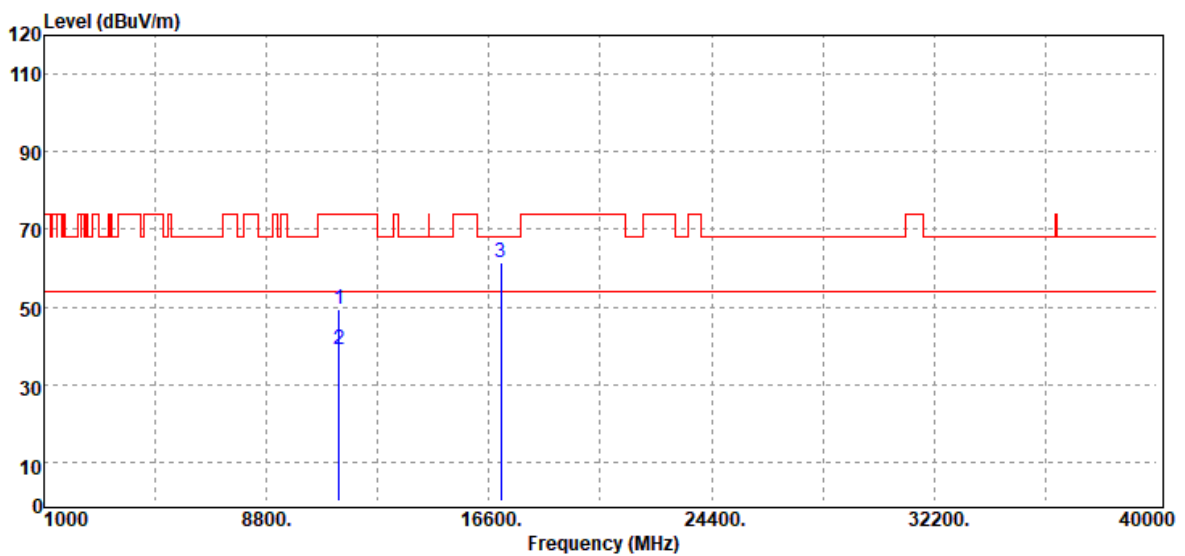

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	29.99	19.44	49.43	74.00	-24.57
11340.00	Average	19.60	19.44	39.04	54.00	-14.96
17010.00	Peak	29.87	31.47	61.34	68.20	-6.86
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5670 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

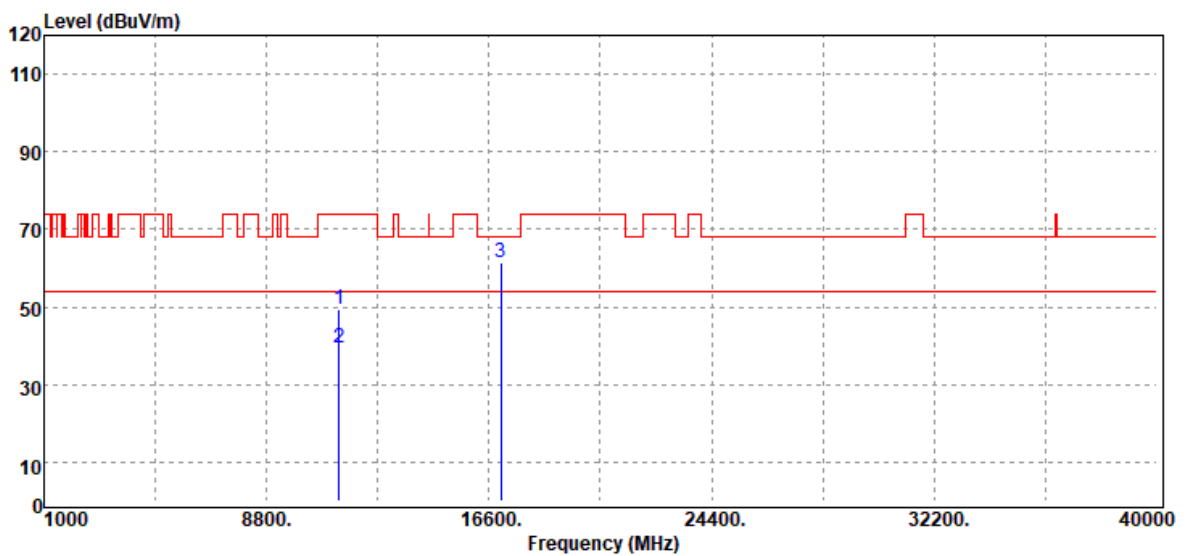


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	29.77	19.44	49.21	74.00	-24.79
11340.00	Average	19.98	19.44	39.42	54.00	-14.58
17010.00	Peak	29.93	31.47	61.40	68.20	-6.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

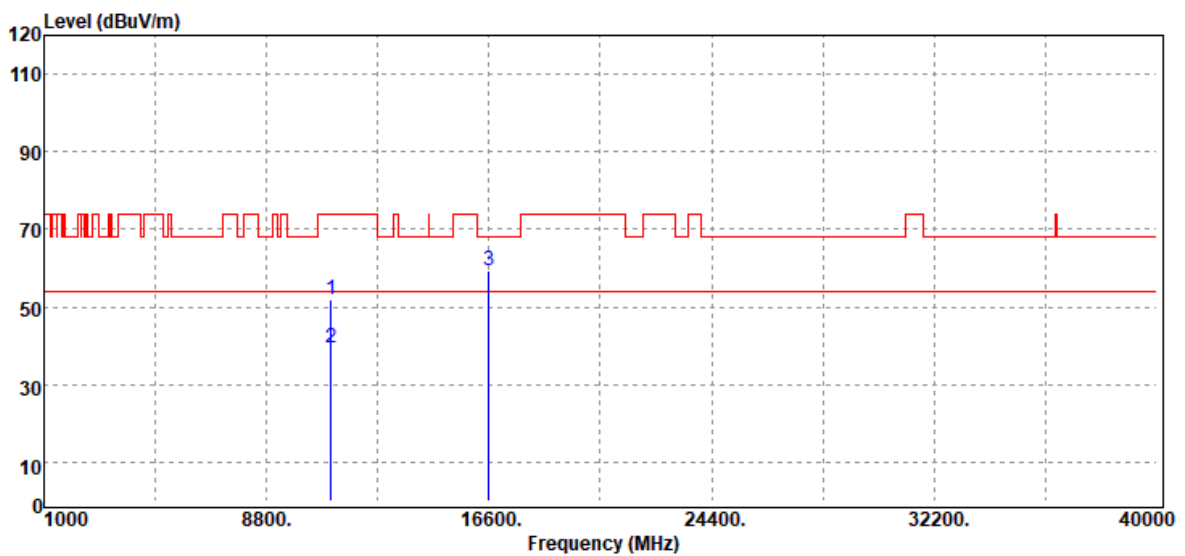


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	32.81	18.97	51.78	74.00	-22.22
11060.00	Average	20.38	18.97	39.35	54.00	-14.65
16590.00	Peak	30.27	28.94	59.21	68.20	-8.99
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

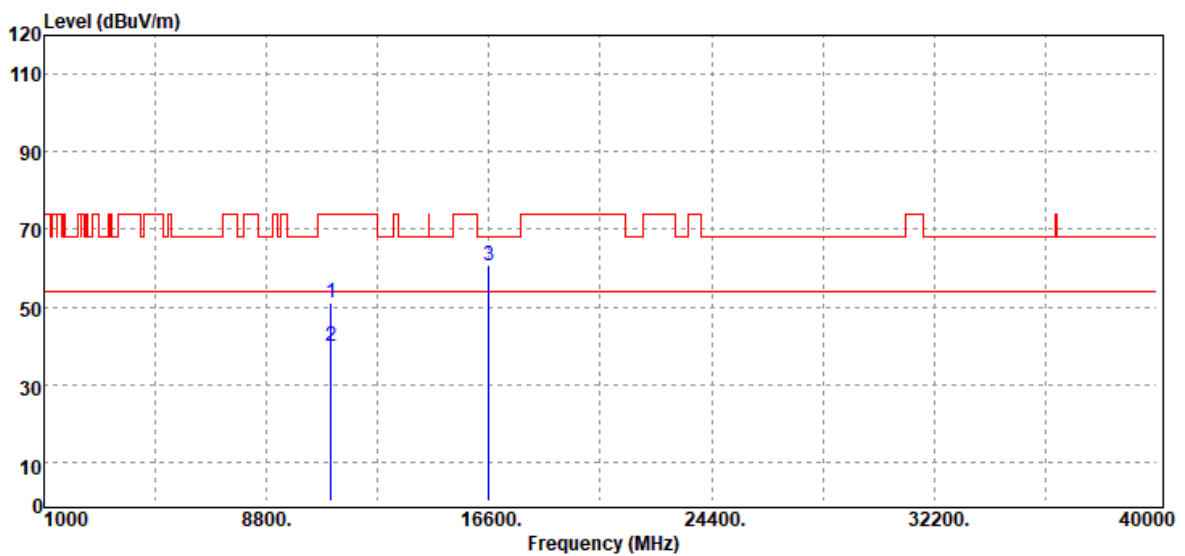


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	32.09	18.97	51.06	74.00	-22.94
11060.00	Average	20.69	18.97	39.66	54.00	-14.34
16590.00	Peak	31.55	28.94	60.49	68.20	-7.71
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

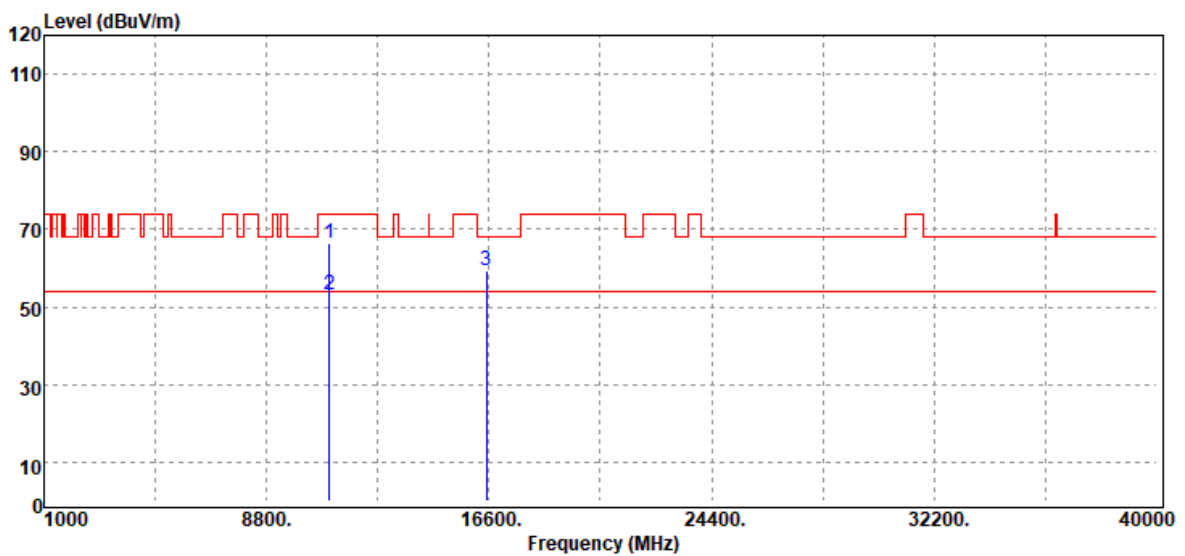


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	47.27	19.04	66.31	74.00	-7.69
11000.00	Average	33.92	19.04	52.96	54.00	-1.04
16500.00	Peak	30.52	29.02	59.54	68.20	-8.66
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_26/0	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

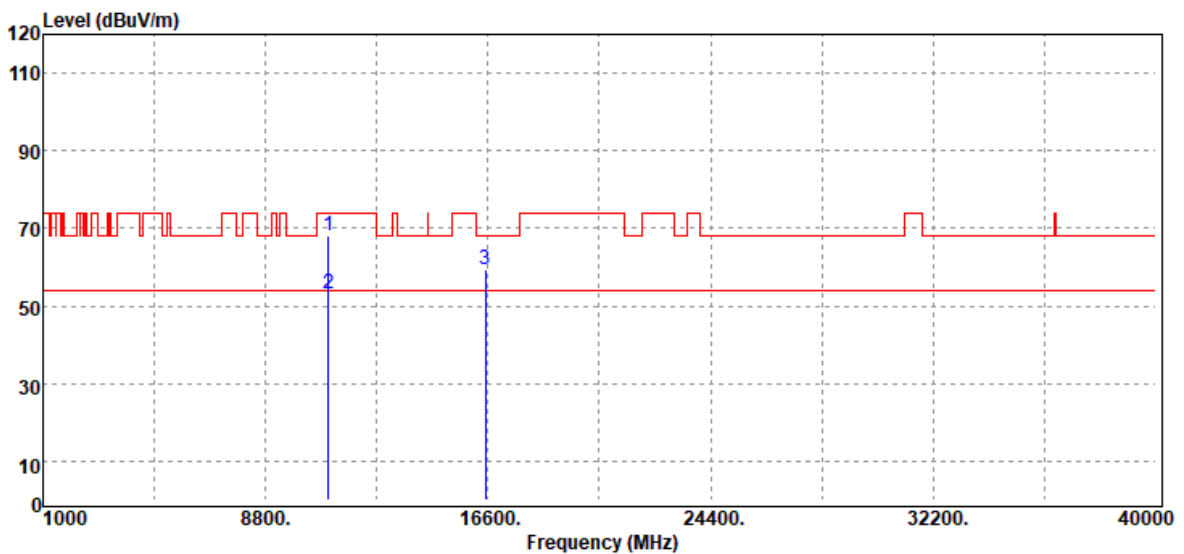


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	49.26	19.04	68.30	74.00	-5.70
11000.00	Average	34.00	19.04	53.04	54.00	-0.96
16500.00	Peak	30.26	29.02	59.28	68.20	-8.92
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

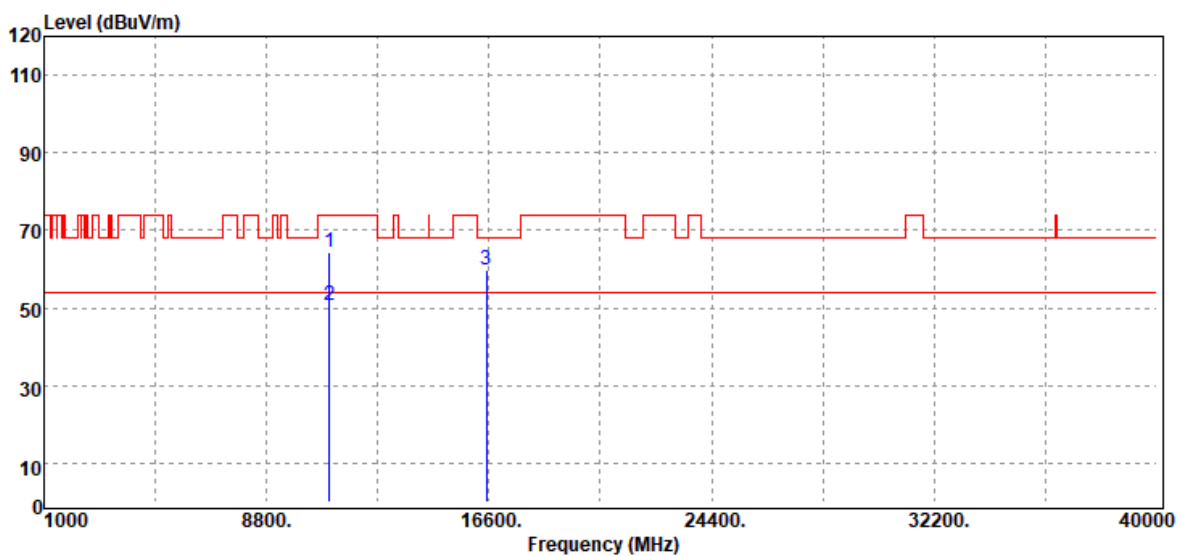


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	45.52	19.04	64.56	74.00	-9.44
11000.00	Average	31.75	19.04	50.79	54.00	-3.21
16500.00	Peak	30.64	29.02	59.66	68.20	-8.54
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_52/37	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

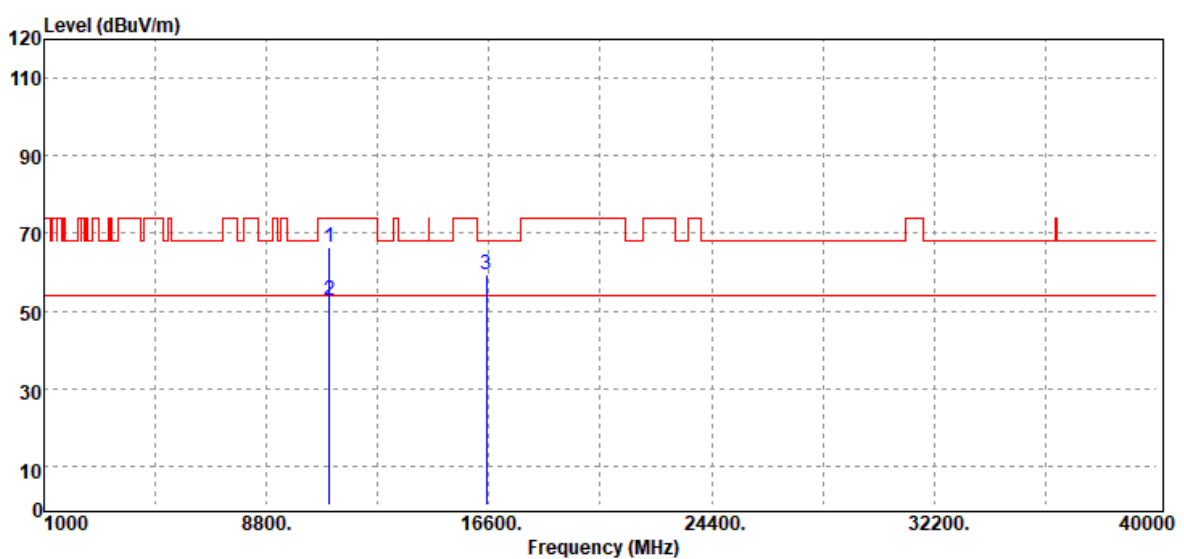


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	47.38	19.04	66.42	74.00	-7.58
11000.00	Average	33.90	19.04	52.94	54.00	-1.06
16500.00	Peak	30.33	29.02	59.35	68.20	-8.85
N/A						

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

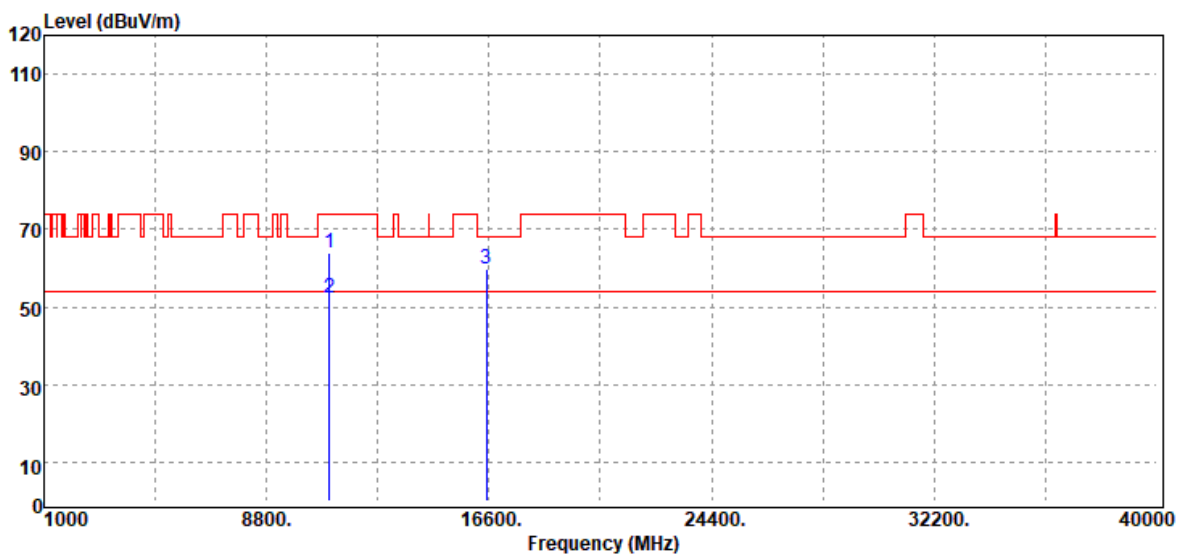

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	44.87	19.04	63.91	74.00	-10.09
11000.00	Average	33.27	19.04	52.31	54.00	-1.69
16500.00	Peak	30.87	29.02	59.89	68.20	-8.31
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5500 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

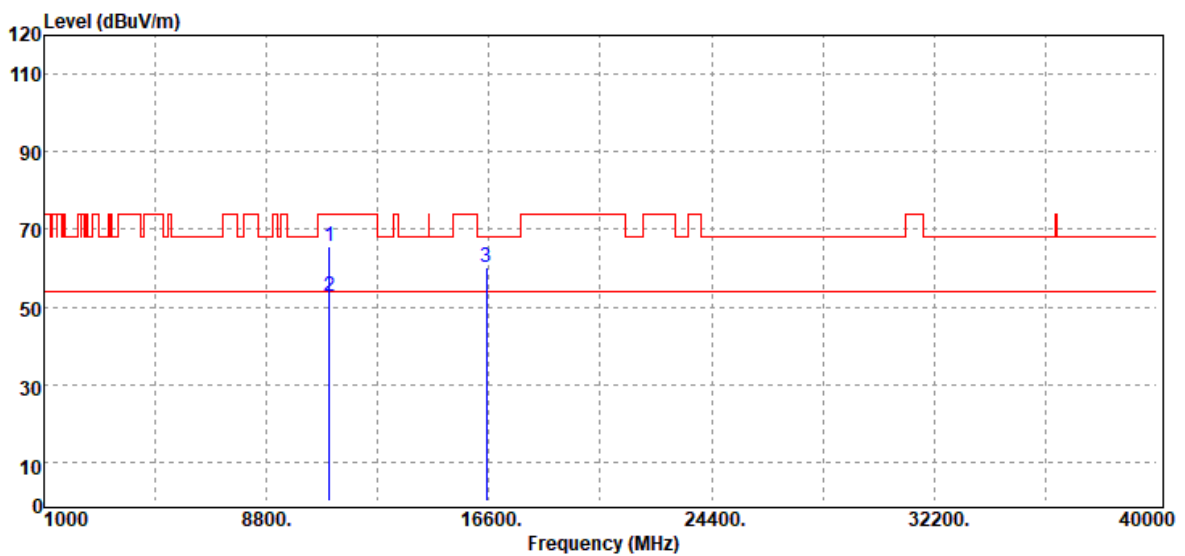


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	46.62	19.04	65.66	74.00	-8.34
11000.00	Average	33.85	19.04	52.89	54.00	-1.11
16500.00	Peak	31.07	29.02	60.09	68.20	-8.11
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5580 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

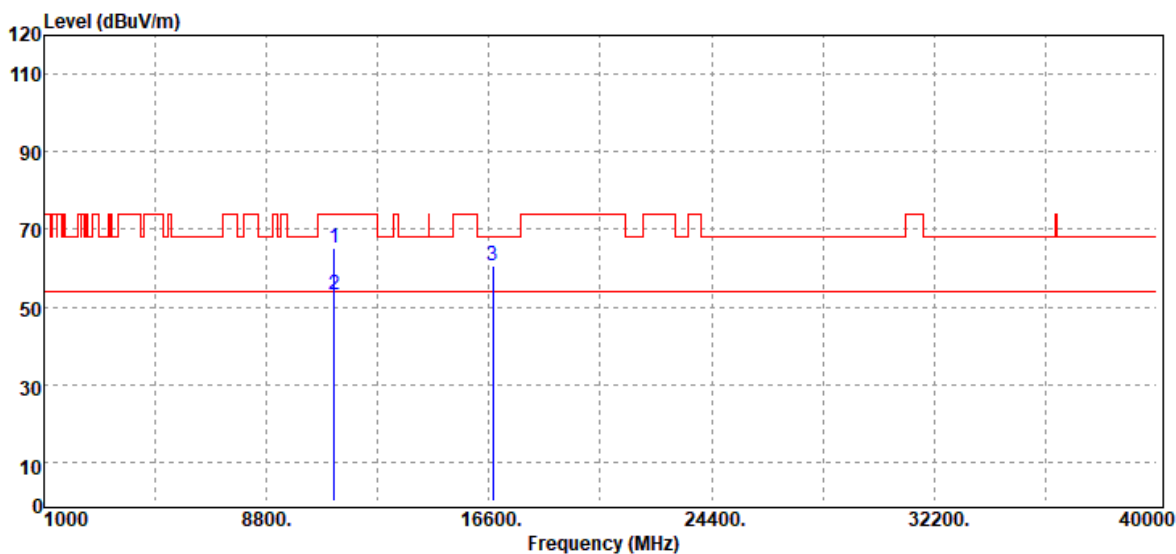


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	45.97	19.23	65.20	74.00	-8.80
11160.00	Average	33.80	19.23	53.03	54.00	-0.97
16740.00	Peak	30.23	30.21	60.44	68.20	-7.76
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5580 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

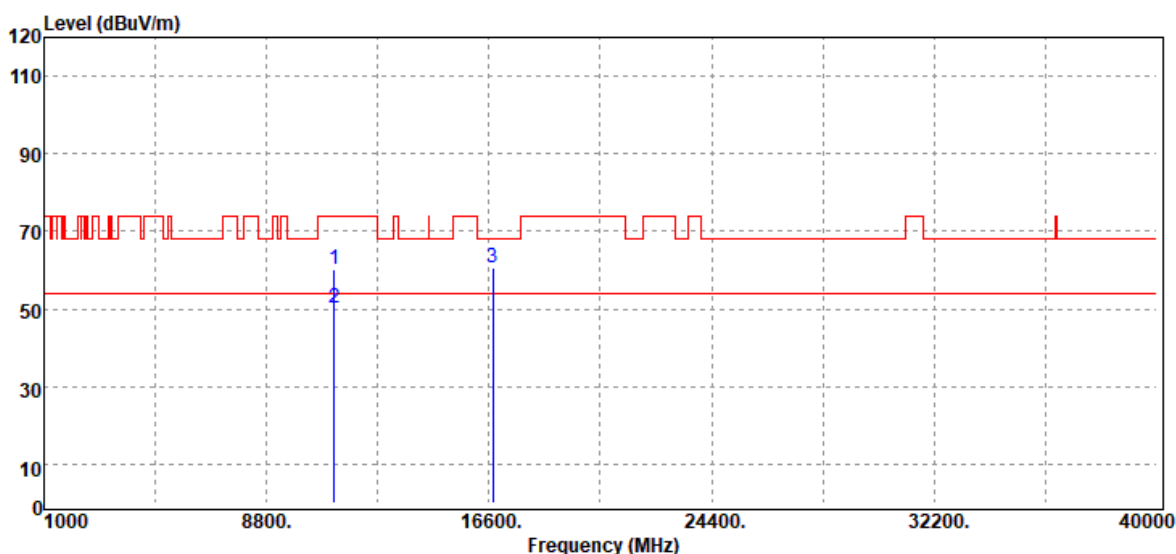


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	41.10	19.23	60.33	74.00	-13.67
11160.00	Average	31.07	19.23	50.30	54.00	-3.70
16740.00	Peak	30.38	30.21	60.59	68.20	-7.61
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

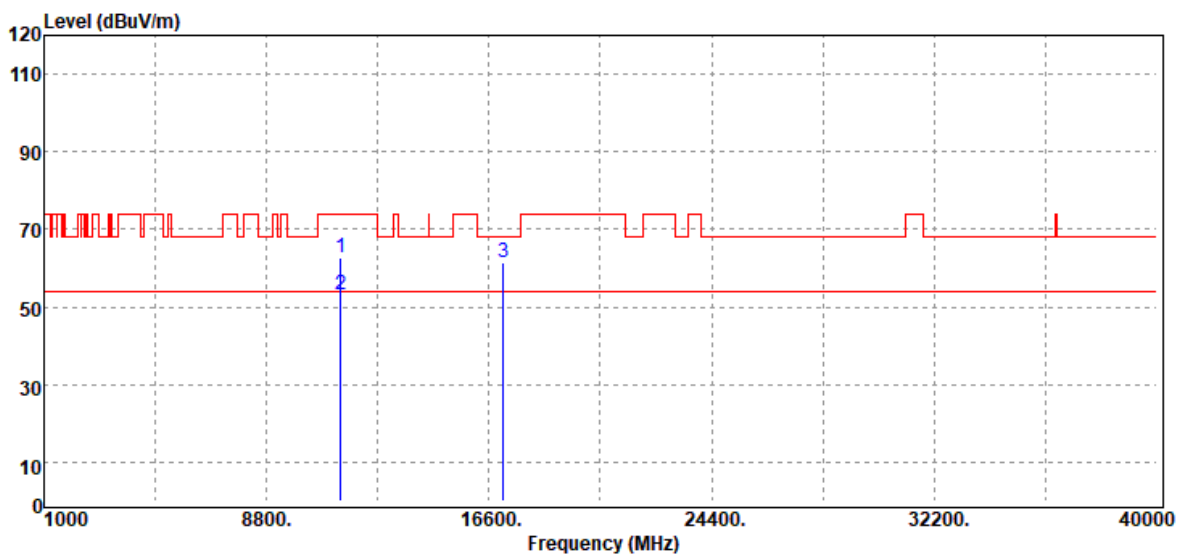


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	43.23	19.58	62.81	74.00	-11.19
11400.00	Average	33.77	19.58	53.35	54.00	-0.65
17100.00	Peak	30.40	31.23	61.63	68.20	-6.57
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_26/8	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

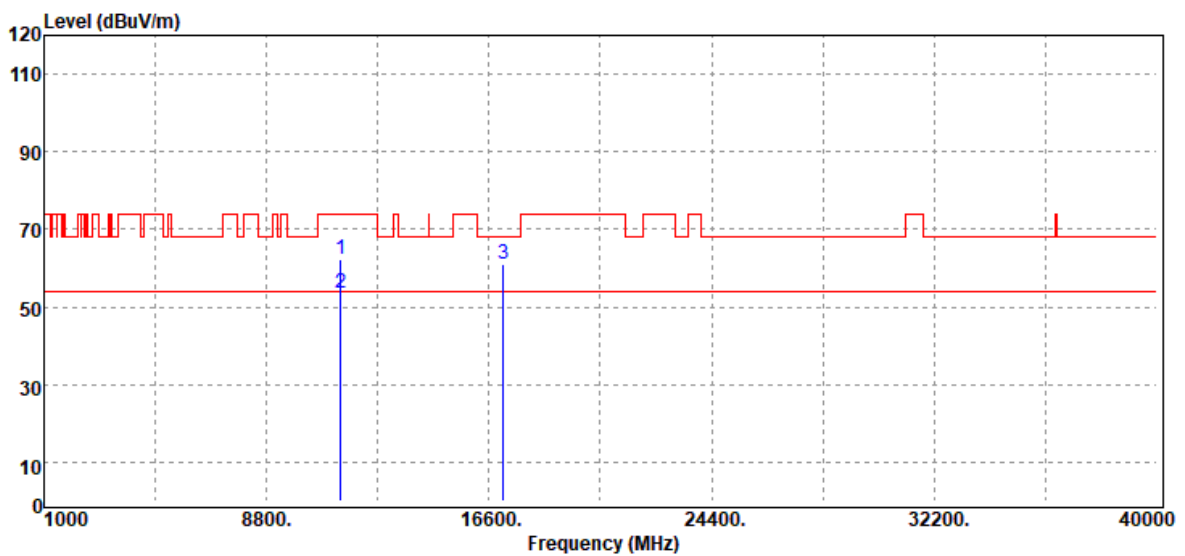


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	42.58	19.58	62.16	74.00	-11.84
11400.00	Average	34.01	19.58	53.59	54.00	-0.41
17100.00	Peak	29.83	31.23	61.06	68.20	-7.14
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

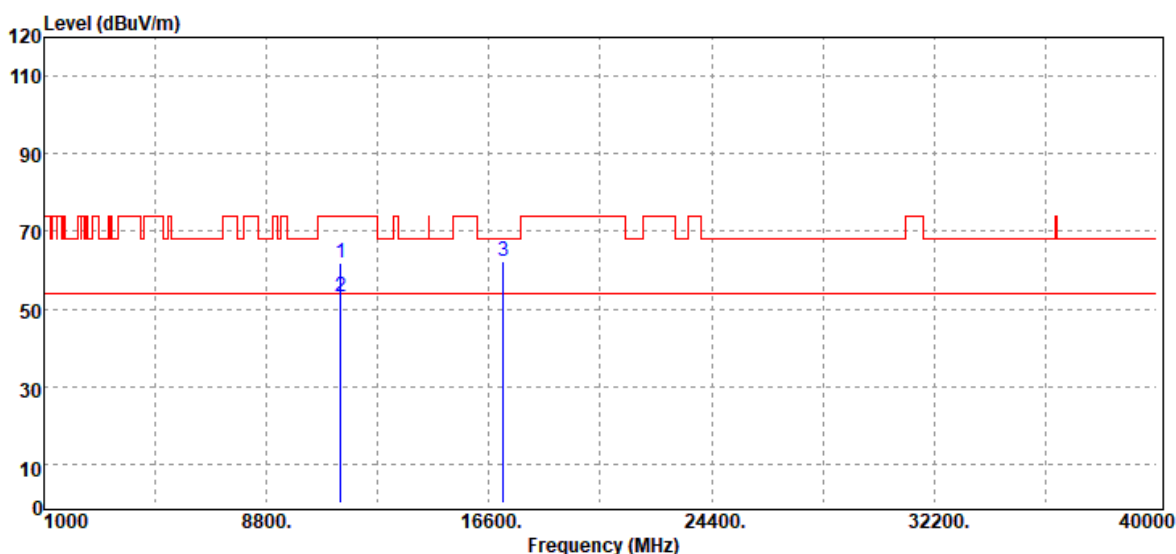


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	42.12	19.58	61.70	74.00	-12.30
11400.00	Average	33.49	19.58	53.07	54.00	-0.93
17100.00	Peak	31.01	31.23	62.24	68.20	-5.96
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_52/40	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

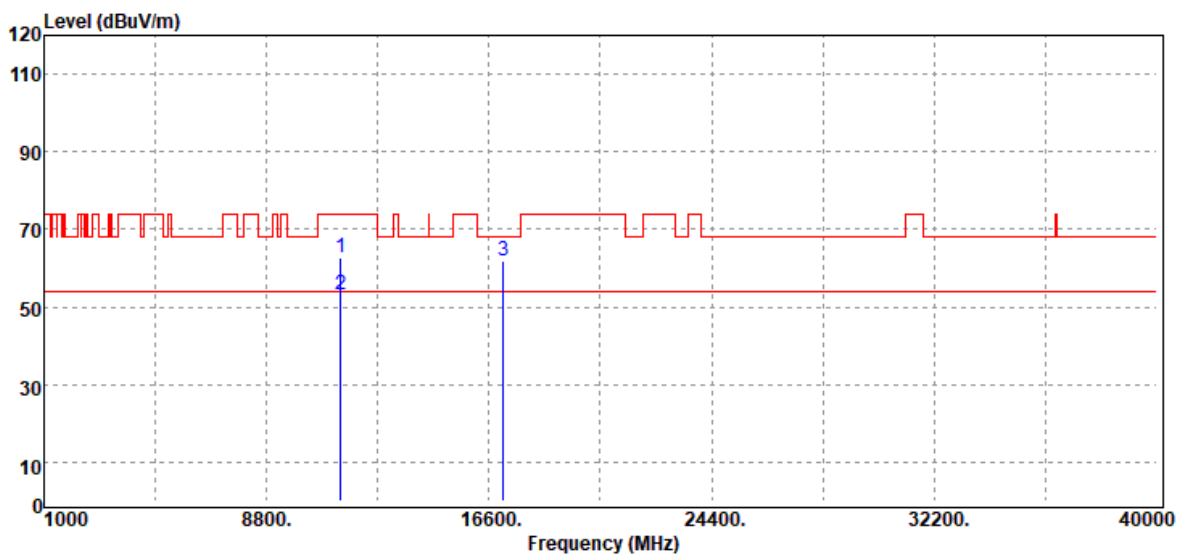


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	42.94	19.58	62.52	74.00	-11.48
11400.00	Average	33.37	19.58	52.95	54.00	-1.05
17100.00	Peak	30.50	31.23	61.73	68.20	-6.47
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

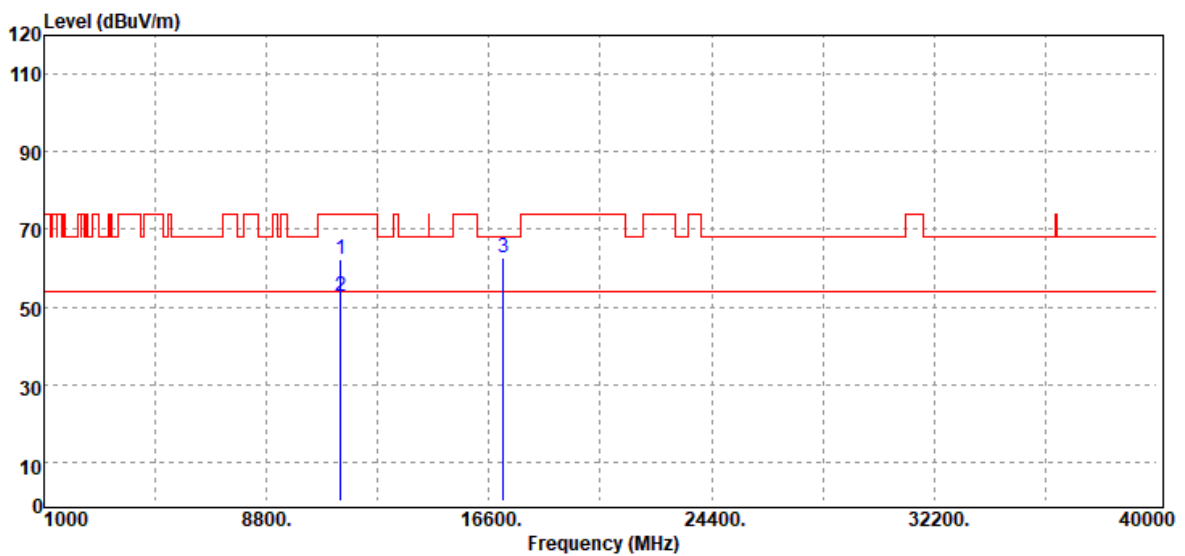

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	42.72	19.58	62.30	74.00	-11.70
11400.00	Average	33.32	19.58	52.90	54.00	-1.10
17100.00	Peak	31.29	31.23	62.52	68.20	-5.68
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5700 MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

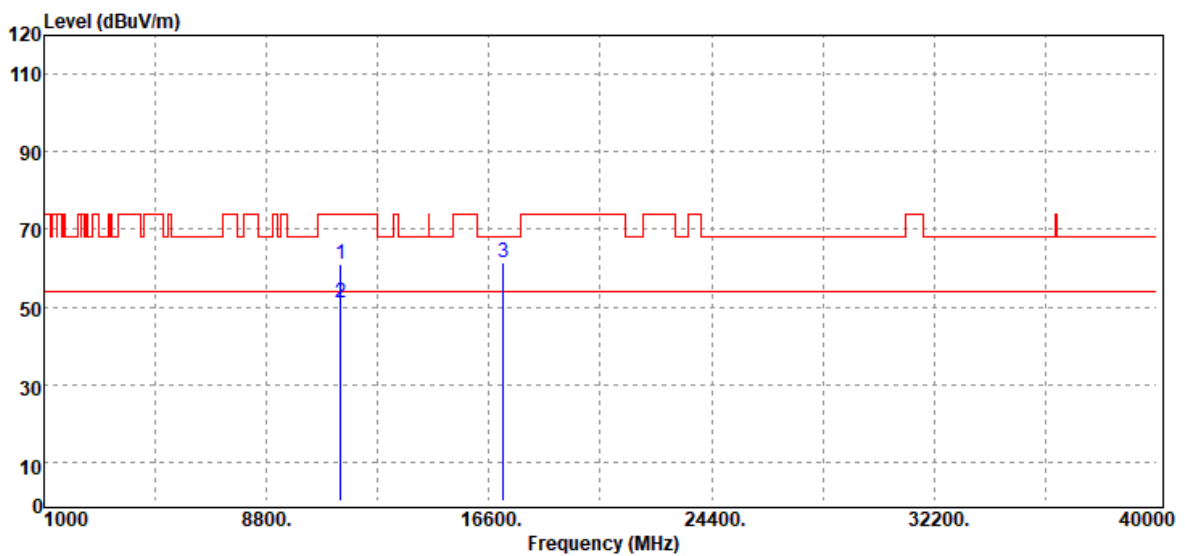


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	41.65	19.58	61.23	74.00	-12.77
11400.00	Average	31.33	19.58	50.91	54.00	-3.09
17100.00	Peak	30.32	31.23	61.55	68.20	-6.65
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

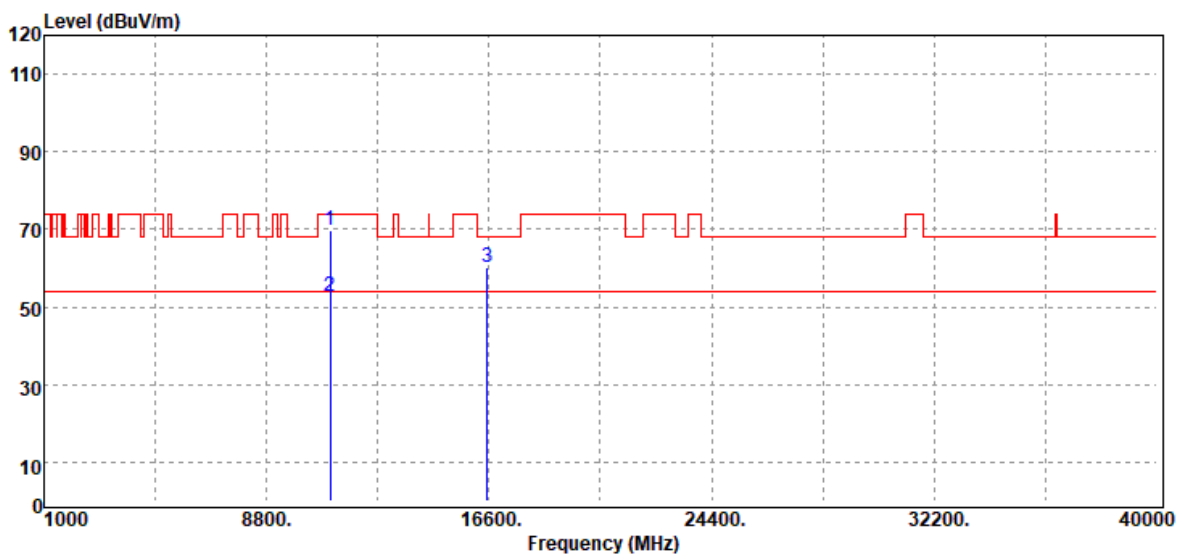


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	50.83	19.00	69.83	74.00	-4.17
11020.00	Average	33.55	19.00	52.55	54.00	-1.45
16530.00	Peak	31.28	28.97	60.25	68.20	-7.95
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5510 MHz_106/53	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

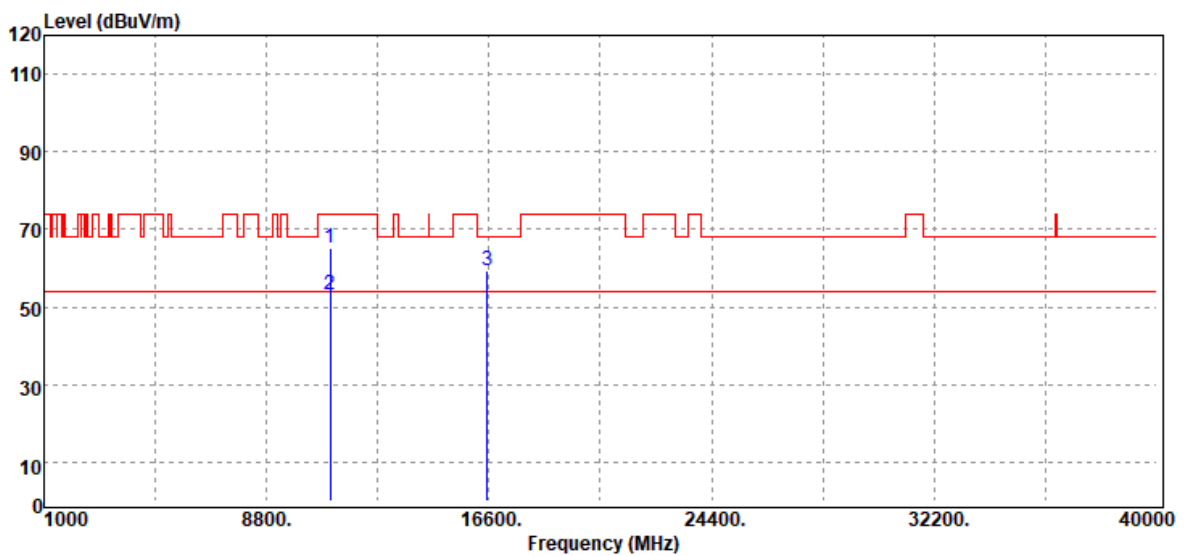


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11020.00	Peak	46.28	19.00	65.28	74.00	-8.72
11020.00	Average	33.98	19.00	52.98	54.00	-1.02
16530.00	Peak	30.51	28.97	59.48	68.20	-8.72
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5550 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

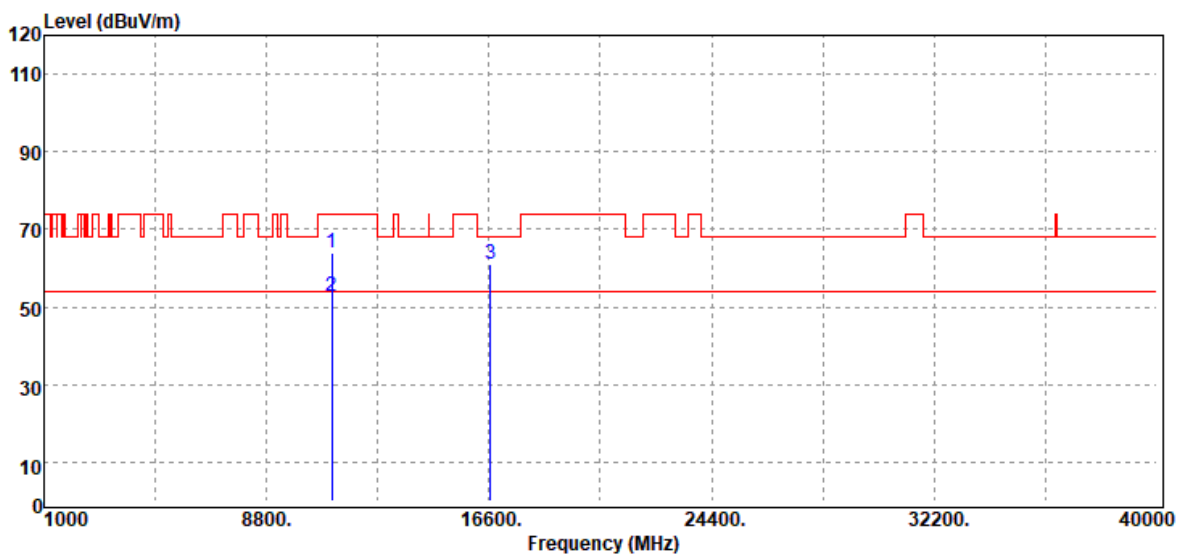


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	44.70	19.11	63.81	74.00	-10.19
11100.00	Average	33.83	19.11	52.94	54.00	-1.06
16650.00	Peak	31.87	29.28	61.15	68.20	-7.05
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5550 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

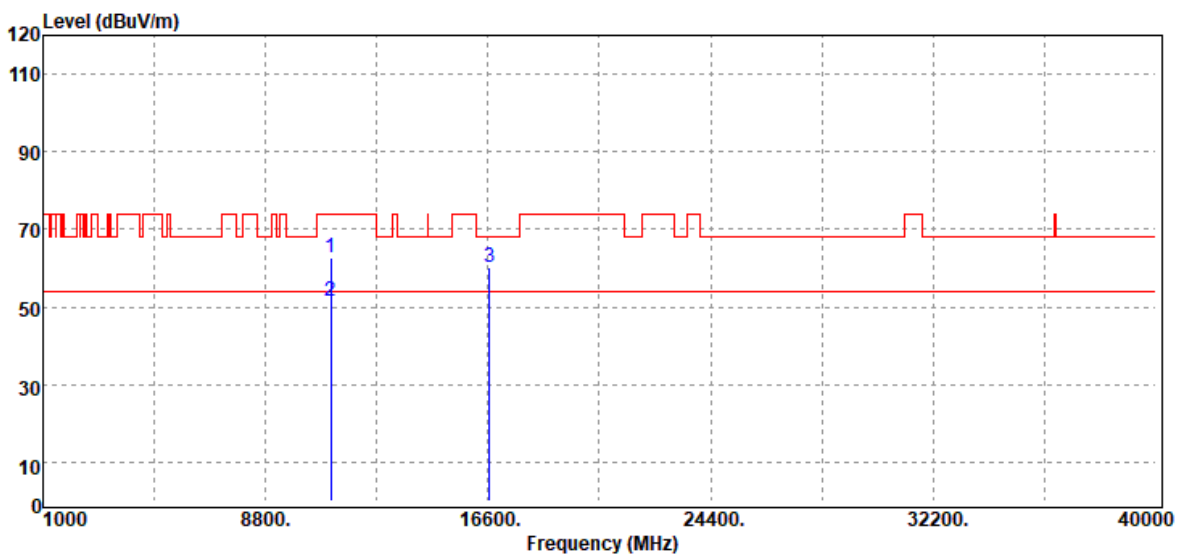


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	43.41	19.11	62.52	74.00	-11.48
11100.00	Average	32.32	19.11	51.43	54.00	-2.57
16650.00	Peak	31.03	29.28	60.31	68.20	-7.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

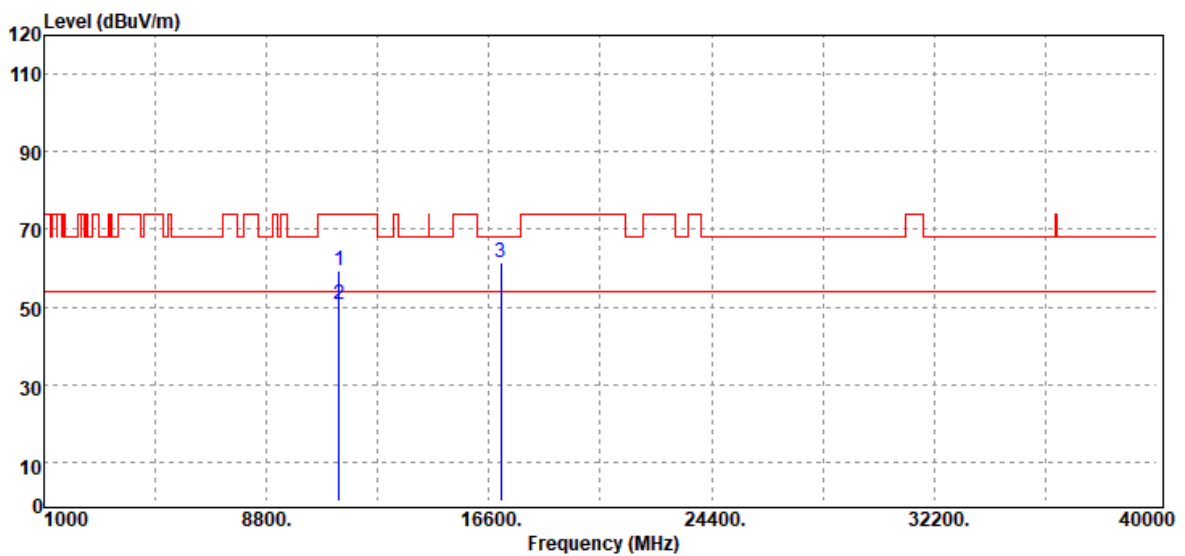


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11340.00	Peak	40.10	19.44	59.54	74.00	-14.46
11340.00	Average	31.06	19.44	50.50	54.00	-3.50
17010.00	Peak	29.98	31.47	61.45	68.20	-6.75
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5670 MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

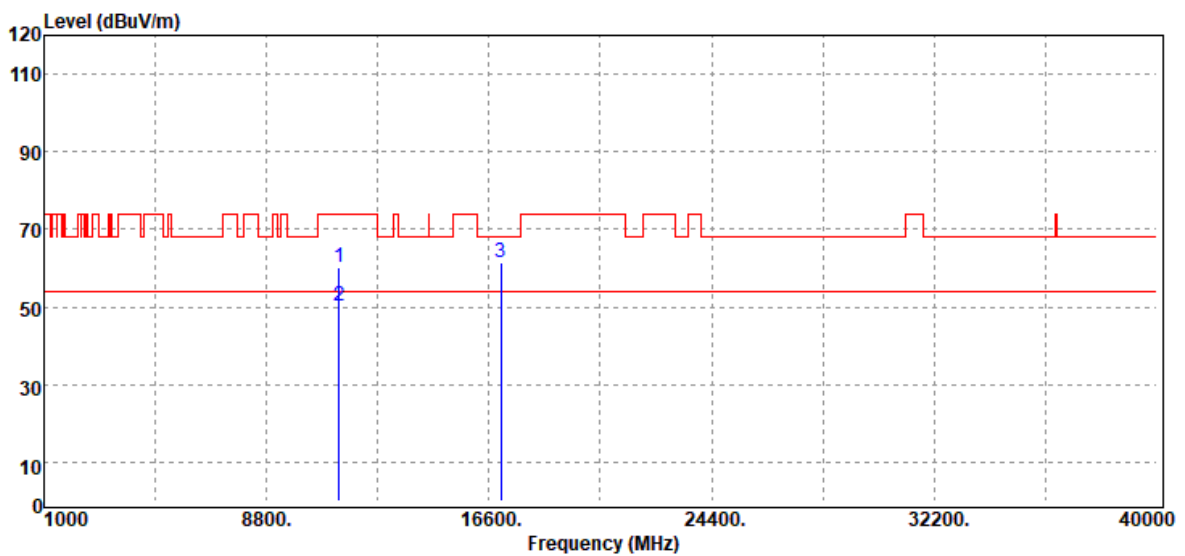


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	40.57	19.44	60.01	74.00	-13.99
11340.00	Average	30.97	19.44	50.41	54.00	-3.59
17010.00	Peak	30.03	31.47	61.50	68.20	-6.70
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

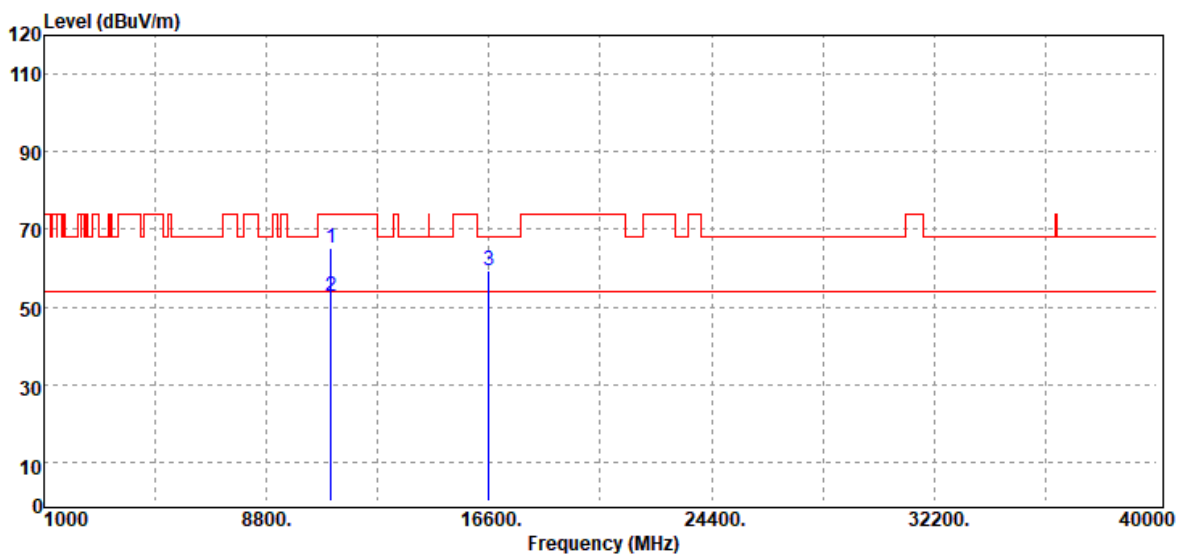

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11060.00	Peak	46.31	18.97	65.28	74.00	-8.72
11060.00	Average	33.81	18.97	52.78	54.00	-1.22
16590.00	Peak	30.47	28.94	59.41	68.20	-8.79
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5530 MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

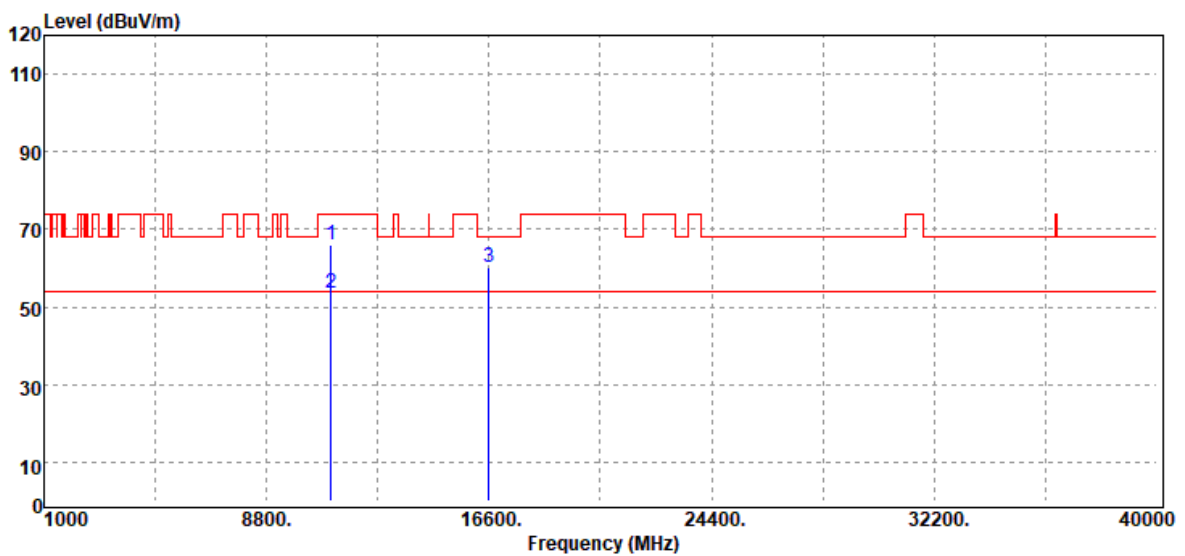

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	47.01	18.97	65.98	74.00	-8.02
11060.00	Average	34.67	18.97	53.64	54.00	-0.36
16590.00	Peak	31.44	28.94	60.38	68.20	-7.82
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

**Test Data for UNII-3 (Beamforming Mode)**

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.3(°C)/ 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

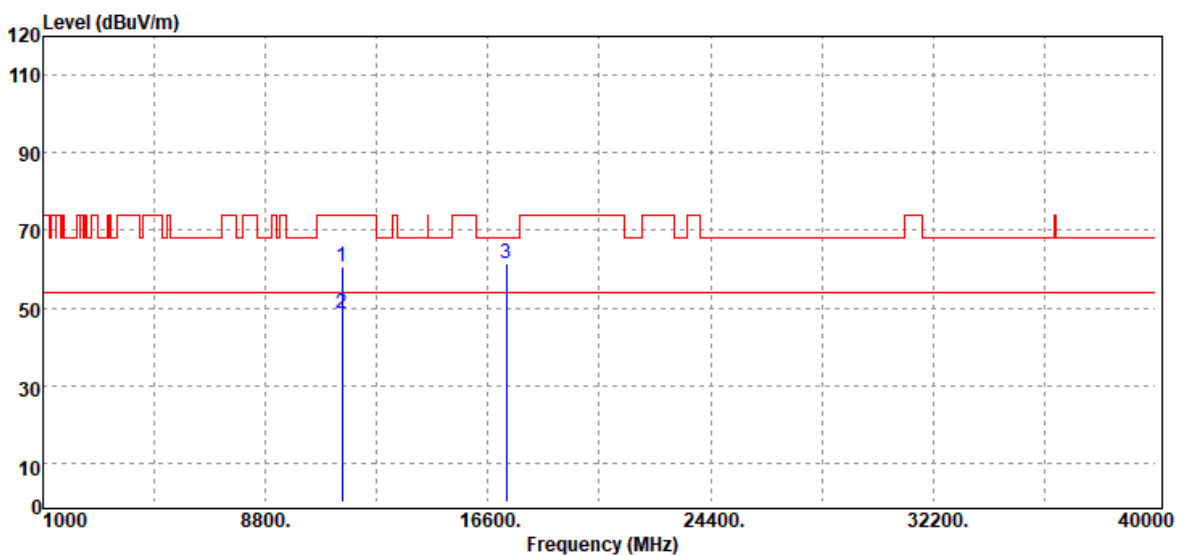


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	41.02	19.69	60.71	74.00	-13.29
11490.00	Average	28.96	19.69	48.65	54.00	-5.35
17235.00	Peak	31.61	30.02	61.63	68.20	-6.57
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

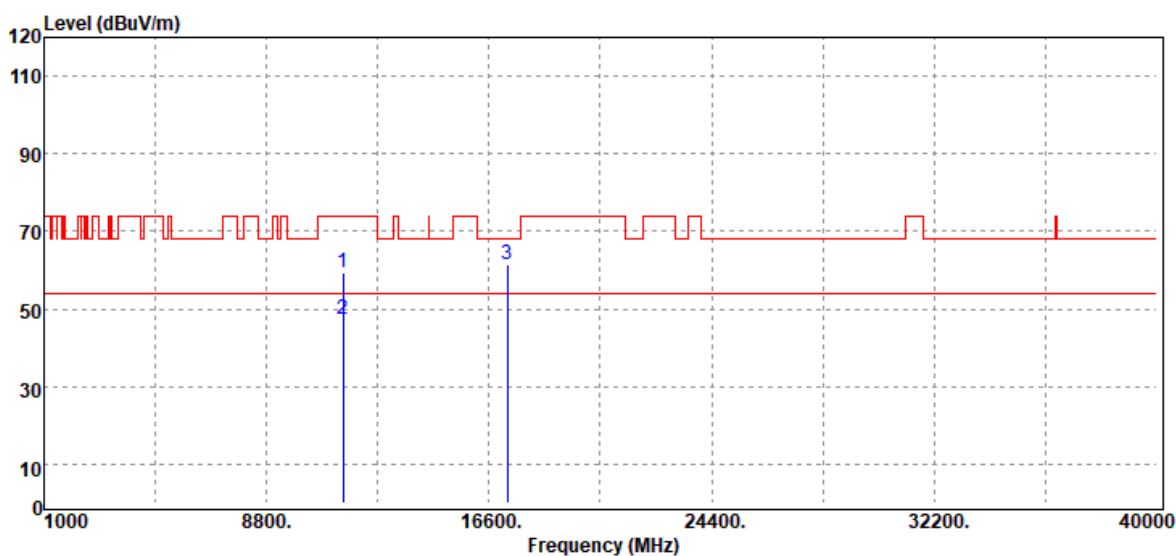

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	39.61	19.69	59.30	74.00	-14.70
11490.00	Average	27.67	19.69	47.36	54.00	-6.64
17235.00	Peak	31.47	30.02	61.49	68.20	-6.71
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		




Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11570.00	Peak	44.77	19.83	64.60	74.00	-9.40
11570.00	Average	33.05	19.83	52.88	54.00	-1.12
17355.00	Peak	32.08	29.34	61.42	68.20	-6.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

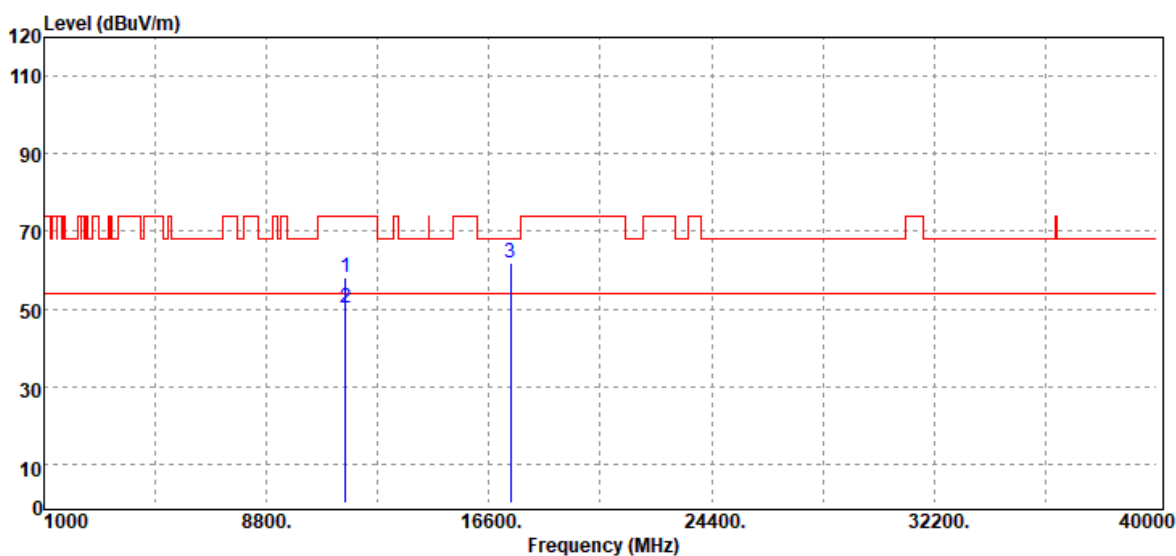


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11570.00	Peak	38.45	19.83	58.28	74.00	-15.72
11570.00	Average	30.25	19.83	50.08	54.00	-3.92
17355.00	Peak	32.37	29.34	61.71	68.20	-6.49
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

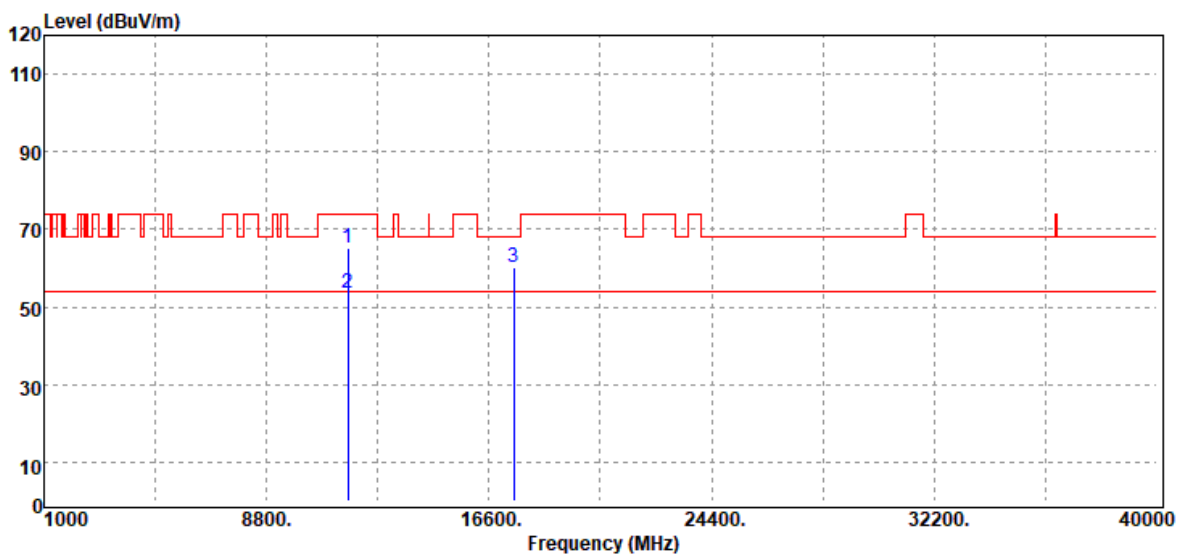


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.00	Peak	45.09	19.90	64.99	74.00	-9.01
11650.00	Average	33.50	19.90	53.40	54.00	-0.60
17475.00	Peak	31.20	29.11	60.31	68.20	-7.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	22.3(°C) / 54%RH
Test Item	Harmonic	Test Date	November 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

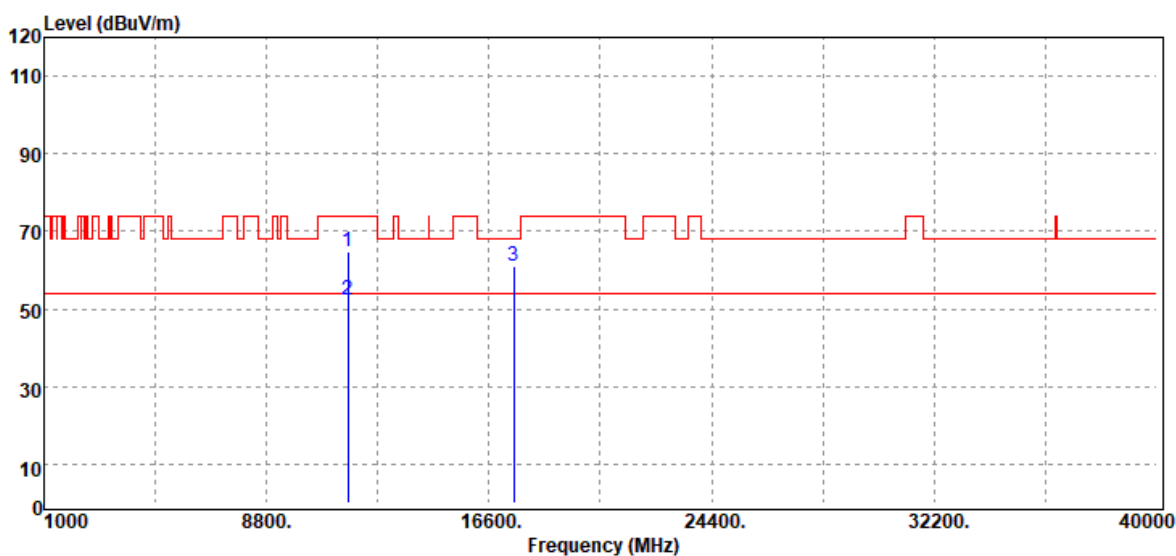


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	44.82	19.90	64.72	74.00	-9.28
11650.00	Average	32.59	19.90	52.49	54.00	-1.51
17475.00	Peak	31.79	29.11	60.90	68.20	-7.30
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5745 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

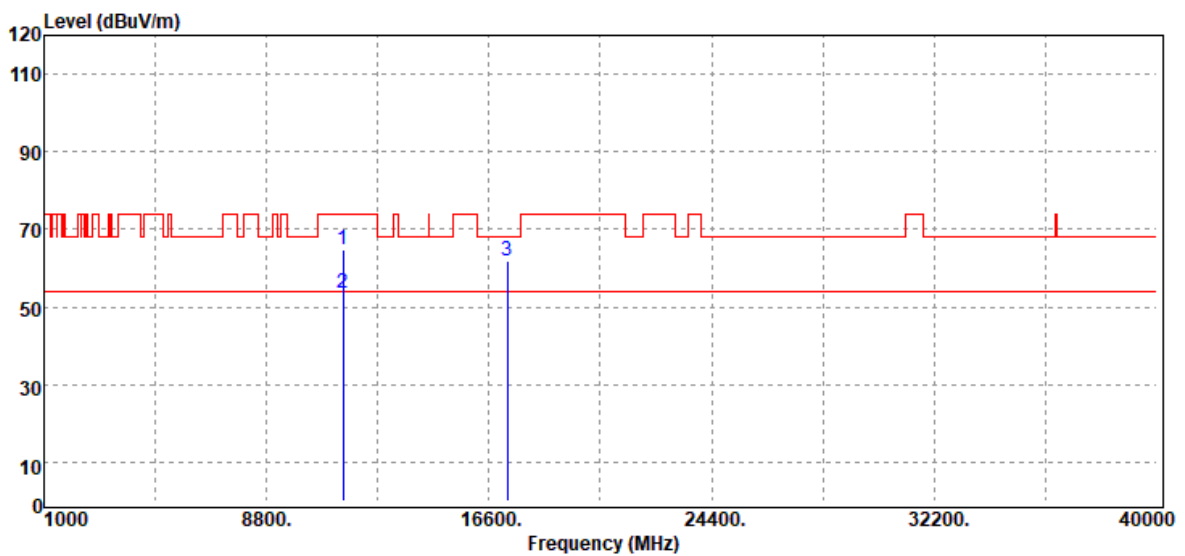

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	44.91	19.69	64.60	74.00	-9.40
11490.00	Average	33.96	19.69	53.65	54.00	-0.35
17235.00	Peak	31.81	30.02	61.83	68.20	-6.37
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 / 5745 MHz	Temp/Hum	20.3(°C) / 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

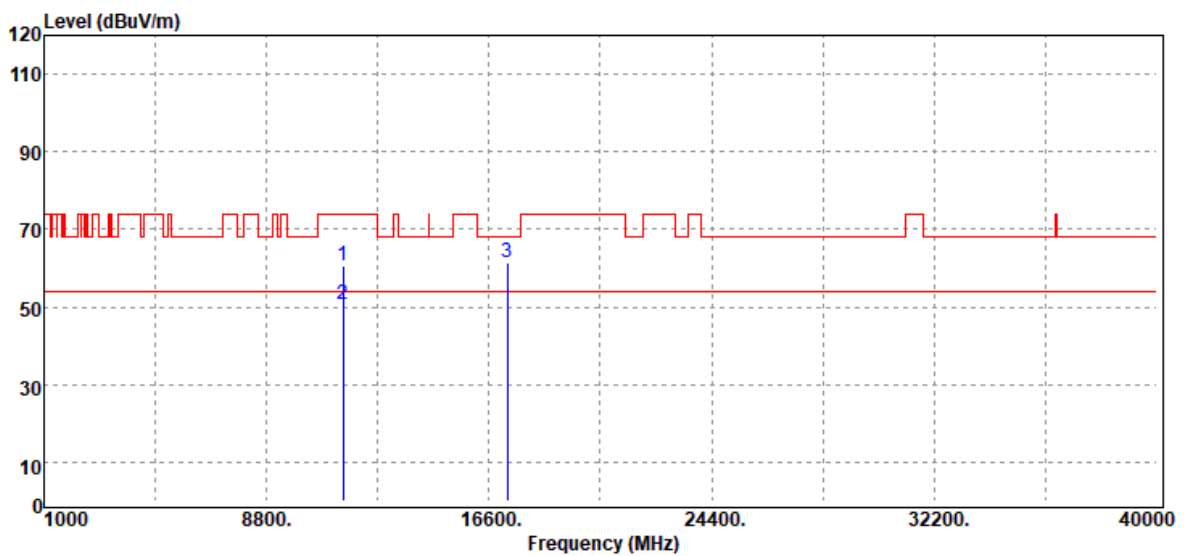


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	40.88	19.69	60.57	74.00	-13.43
11490.00	Average	30.82	19.69	50.51	54.00	-3.49
17235.00	Peak	31.26	30.02	61.28	68.20	-6.92
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

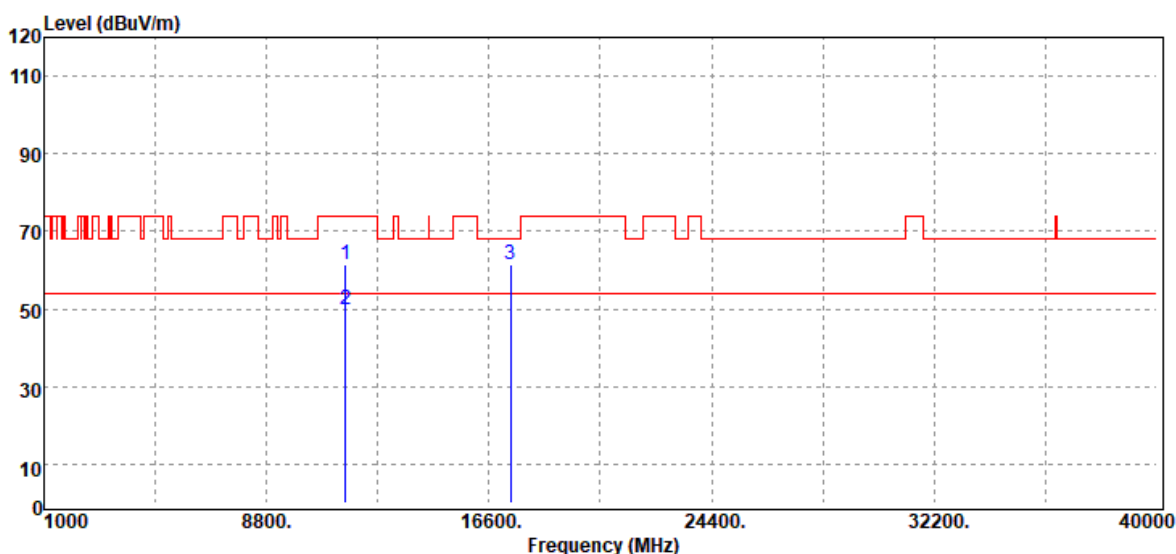


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	41.57	19.83	61.40	74.00	-12.60
11570.00	Average	30.13	19.83	49.96	54.00	-4.04
17355.00	Peak	32.06	29.34	61.40	68.20	-6.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

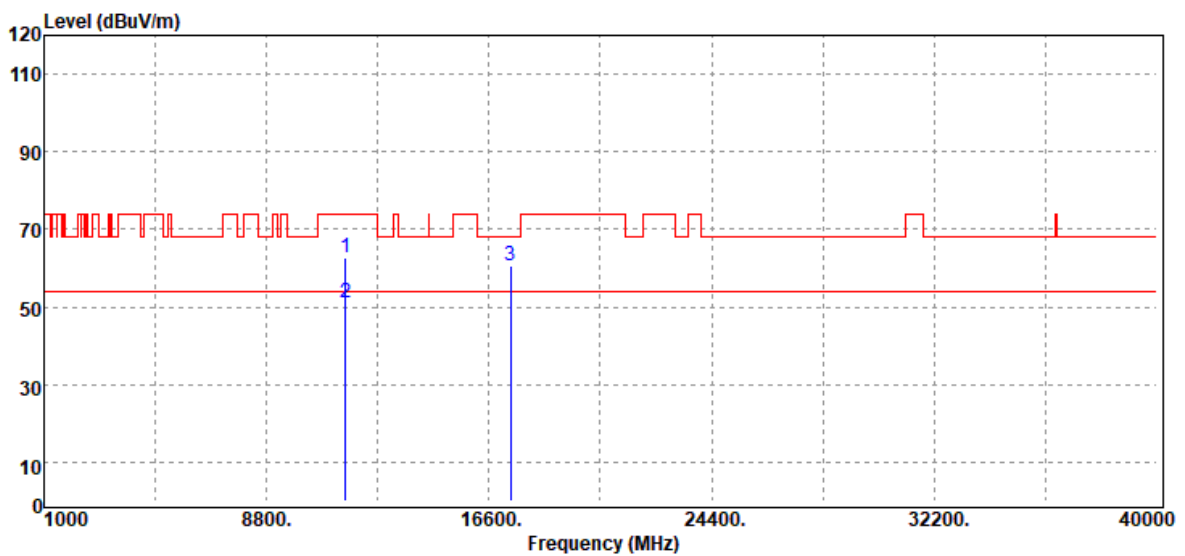


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	42.72	19.83	62.55	74.00	-11.45
11570.00	Average	31.31	19.83	51.14	54.00	-2.86
17355.00	Peak	31.33	29.34	60.67	68.20	-7.53
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

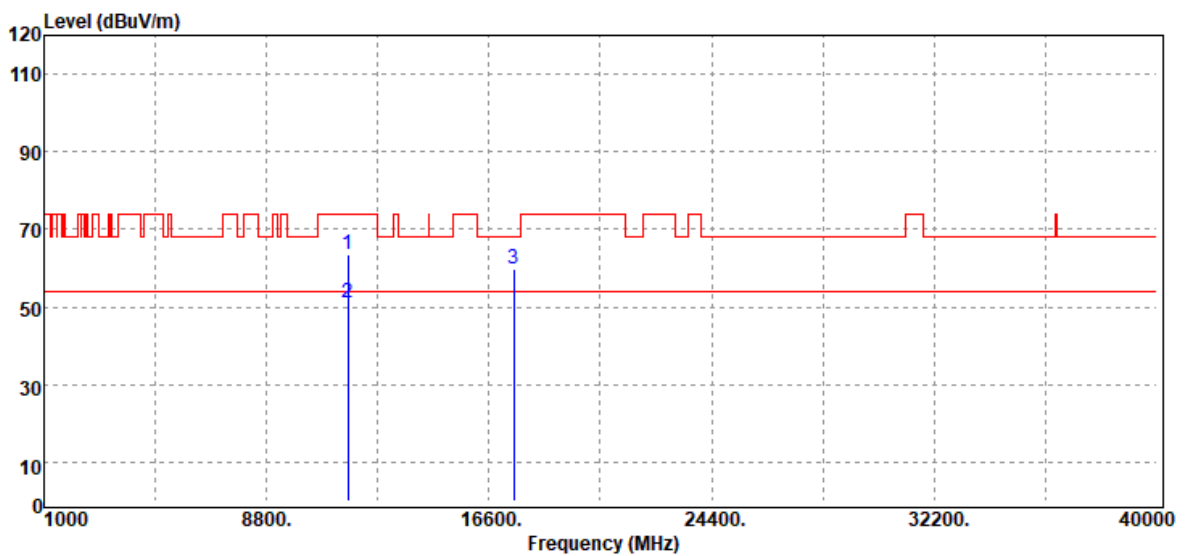


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	43.55	19.90	63.45	74.00	-10.55
11650.00	Average	31.38	19.90	51.28	54.00	-2.72
17475.00	Peak	30.79	29.11	59.90	68.20	-8.30
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	20.3(°C)/ 51%RH
Test Item	Harmonic	Test Date	November 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

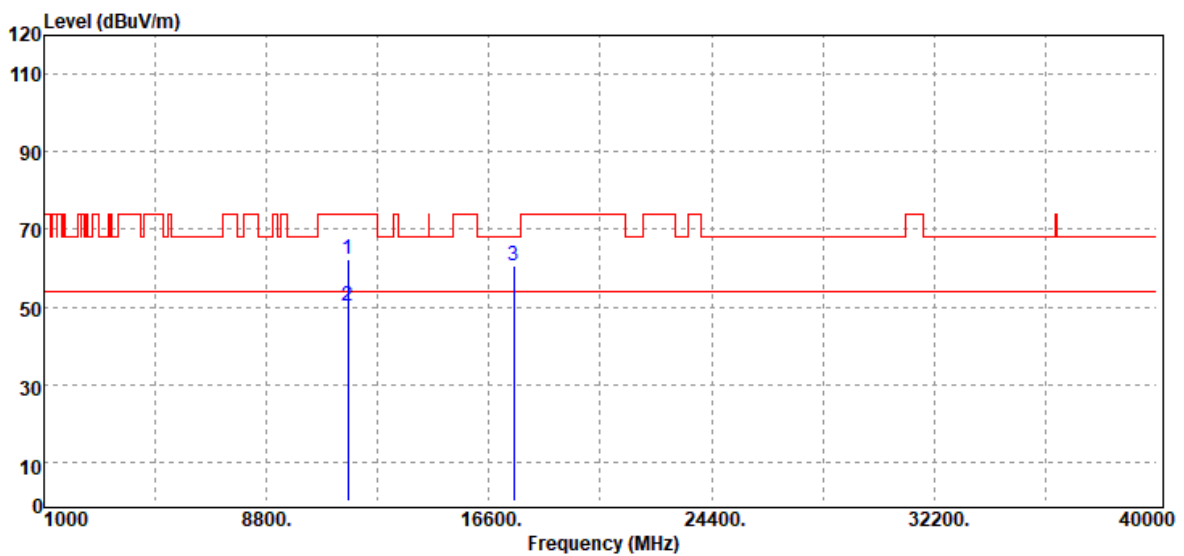


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	42.38	19.90	62.28	74.00	-11.72
11650.00	Average	30.22	19.90	50.12	54.00	-3.88
17475.00	Peak	31.33	29.11	60.44	68.20	-7.76
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	21.1(°C) / 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

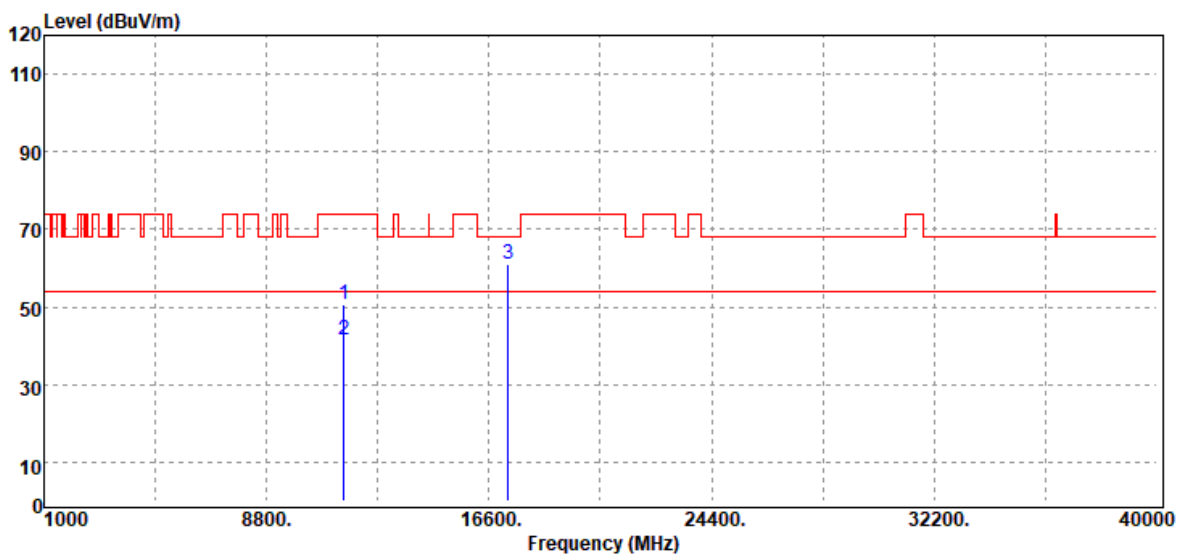


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11510.00	Peak	30.76	19.72	50.48	74.00	-23.52
11510.00	Average	21.95	19.72	41.67	54.00	-12.33
17265.00	Peak	31.09	29.80	60.89	68.20	-7.31
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5755 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

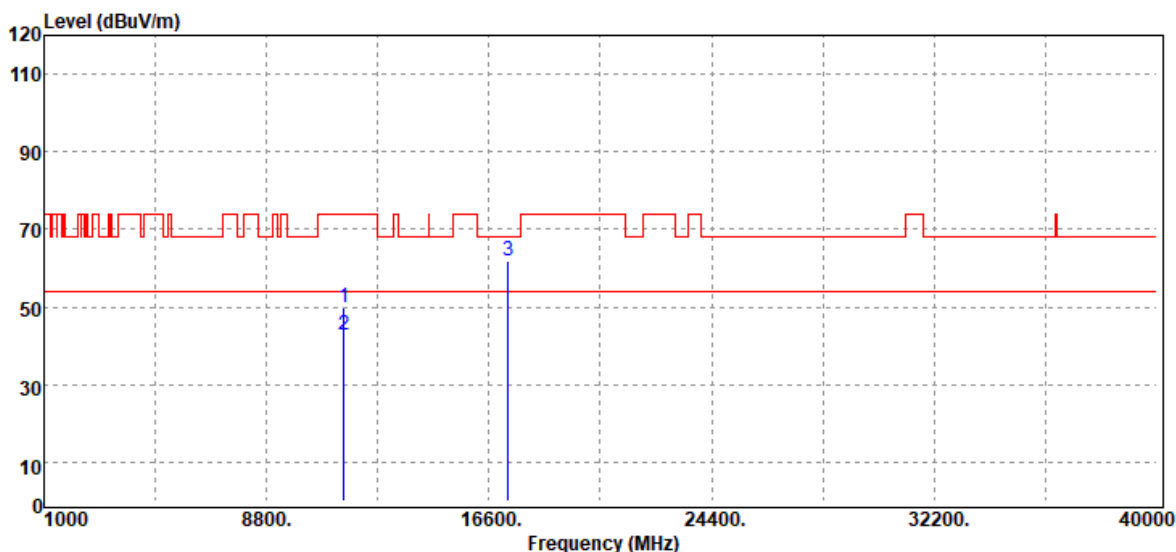


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	30.11	19.72	49.83	74.00	-24.17
11510.00	Average	23.02	19.72	42.74	54.00	-11.26
17265.00	Peak	32.19	29.80	61.99	68.20	-6.21
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

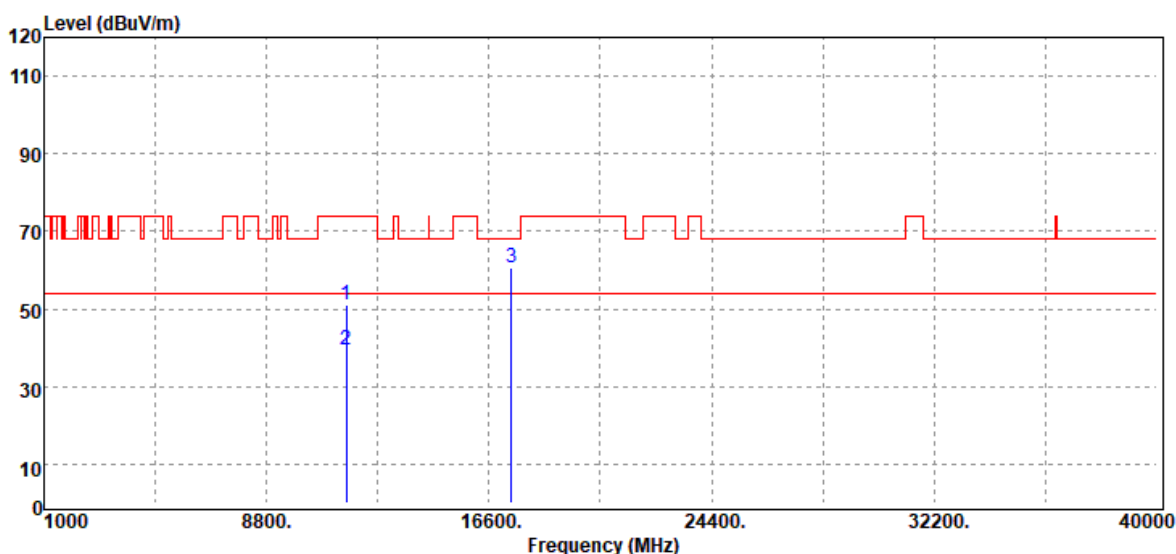

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
11590.00	Peak	31.11	19.87	50.98	74.00	-23.02
11590.00	Average	19.53	19.87	39.40	54.00	-14.60
17385.00	Peak	31.52	29.24	60.76	68.20	-7.44
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11n 40 / 5795 MHz	Temp/Hum	21.1(°C)/ 55%RH
Test Item	Harmonic	Test Date	November 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

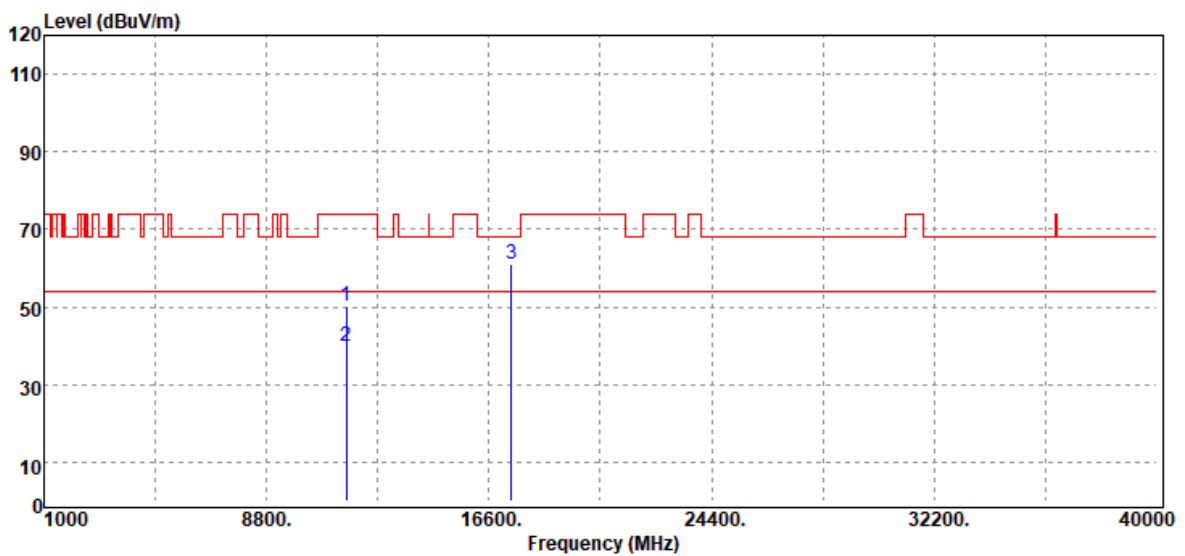


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	30.44	19.87	50.31	74.00	-23.69
11590.00	Average	19.90	19.87	39.77	54.00	-14.23
17385.00	Peak	31.78	29.24	61.02	68.20	-7.18
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

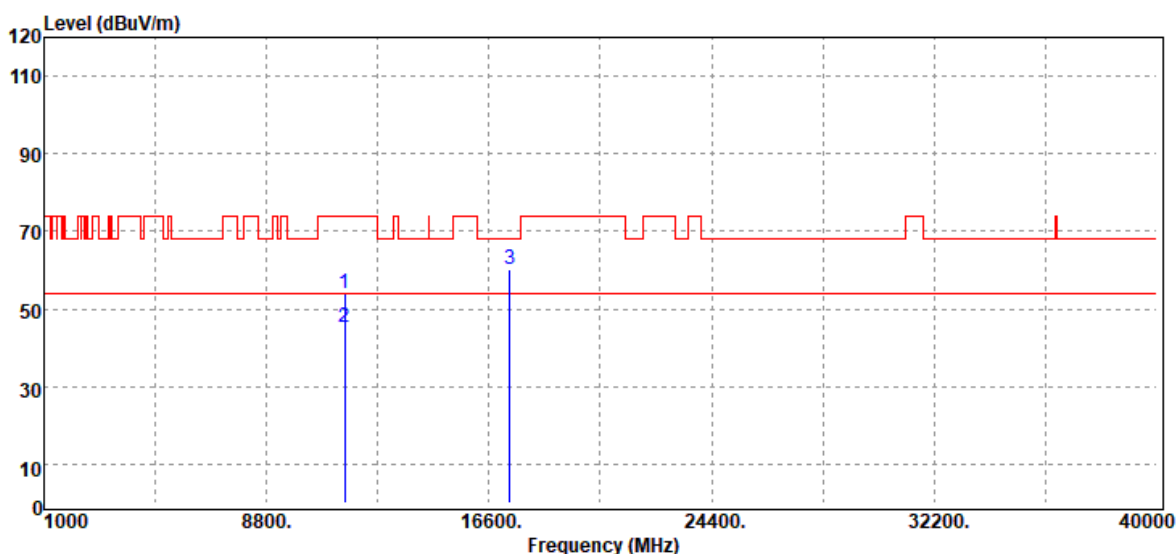


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11550.00	Peak	34.23	19.80	54.03	74.00	-19.97
11550.00	Average	25.61	19.80	45.41	54.00	-8.59
17325.00	Peak	30.86	29.48	60.34	68.20	-7.86
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

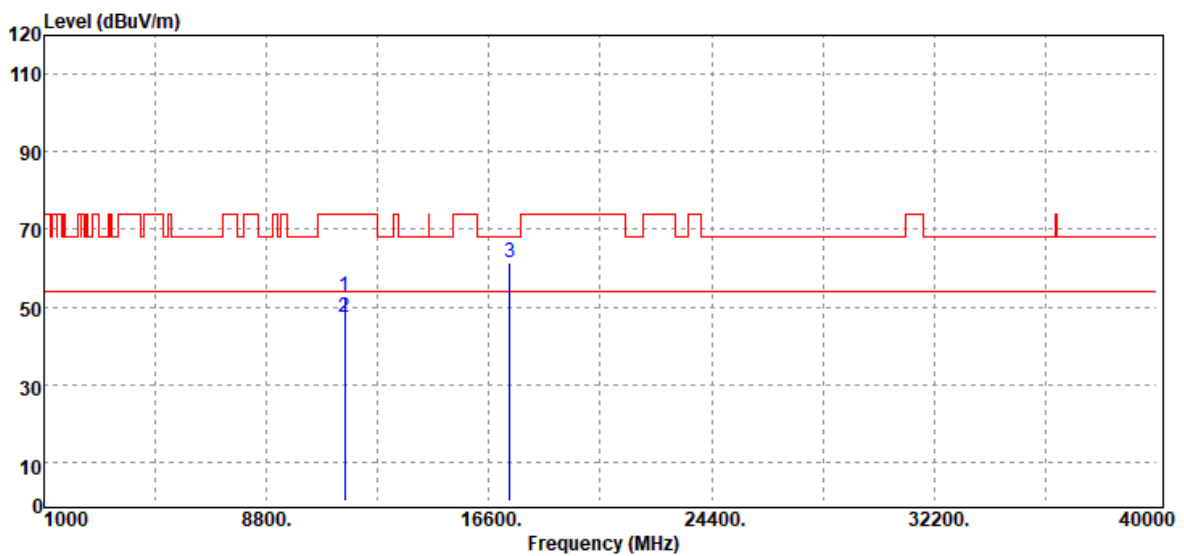


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	32.90	19.80	52.70	74.00	-21.30
11550.00	Average	27.37	19.80	47.17	54.00	-6.83
17325.00	Peak	32.05	29.48	61.53	68.20	-6.67
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	20.9(°C) / 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

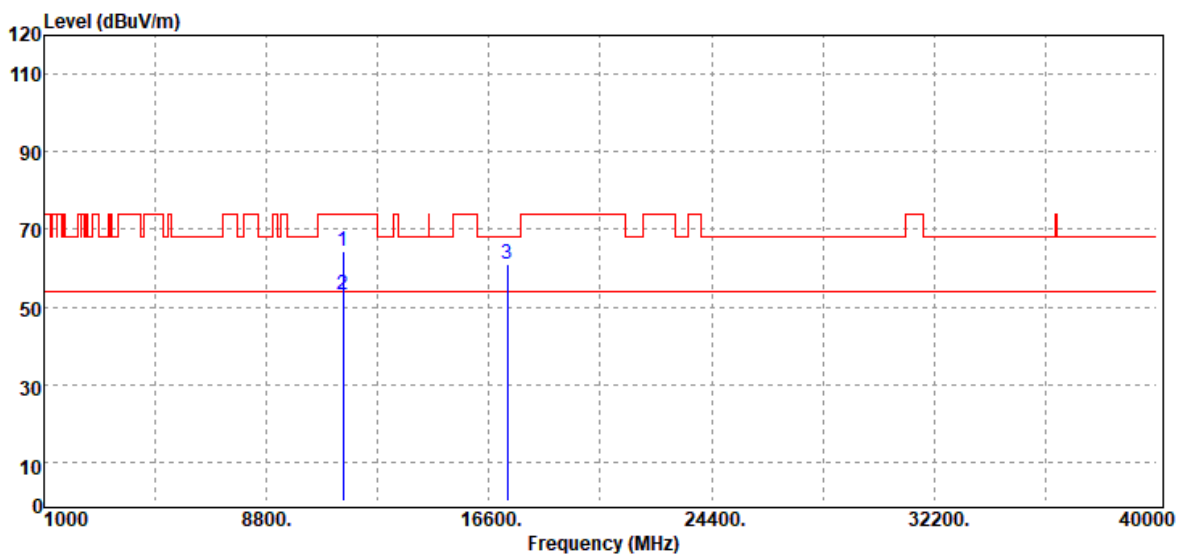


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	44.69	19.69	64.38	74.00	-9.62
11490.00	Average	33.58	19.69	53.27	54.00	-0.73
17235.00	Peak	31.13	30.02	61.15	68.20	-7.05
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_26/0	Temp/Hum	20.9(°C) / 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

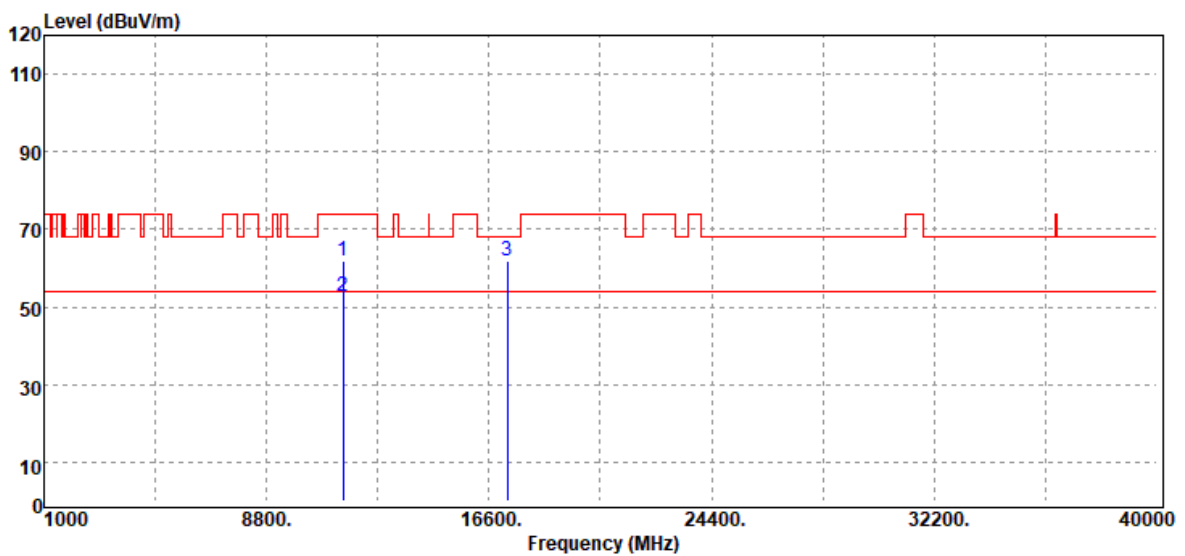


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	42.35	19.69	62.04	74.00	-11.96
11490.00	Average	33.23	19.69	52.92	54.00	-1.08
17235.00	Peak	31.67	30.02	61.69	68.20	-6.51
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	20.9(°C) / 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

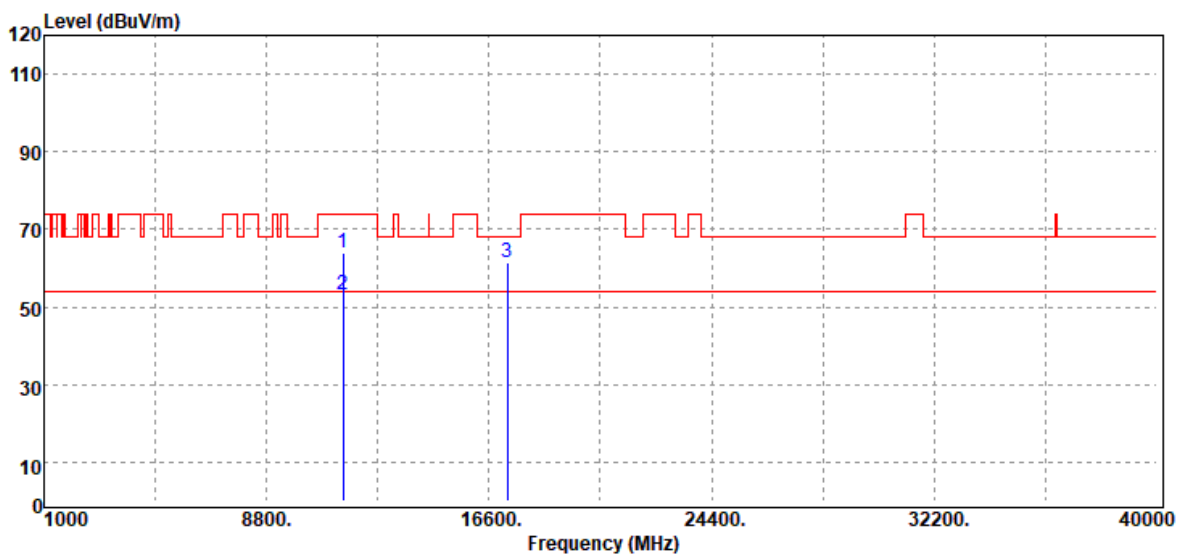


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	44.27	19.69	63.96	74.00	-10.04
11490.00	Average	33.31	19.69	53.00	54.00	-1.00
17235.00	Peak	31.32	30.02	61.34	68.20	-6.86
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_52/37	Temp/Hum	20.9(°C) / 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

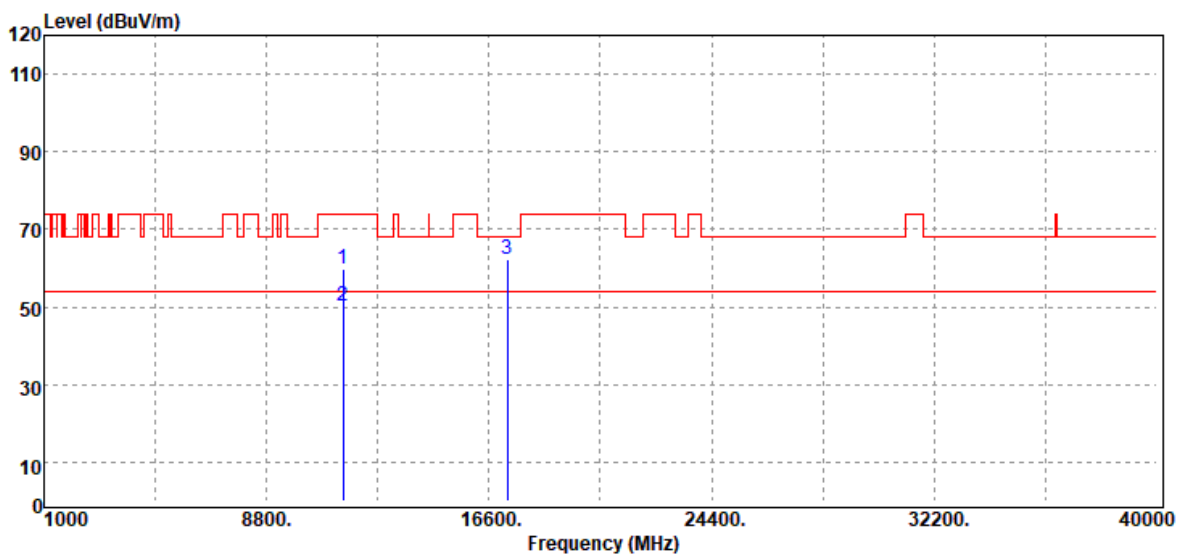


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	40.24	19.69	59.93	74.00	-14.07
11490.00	Average	30.54	19.69	50.23	54.00	-3.77
17235.00	Peak	32.11	30.02	62.13	68.20	-6.07
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

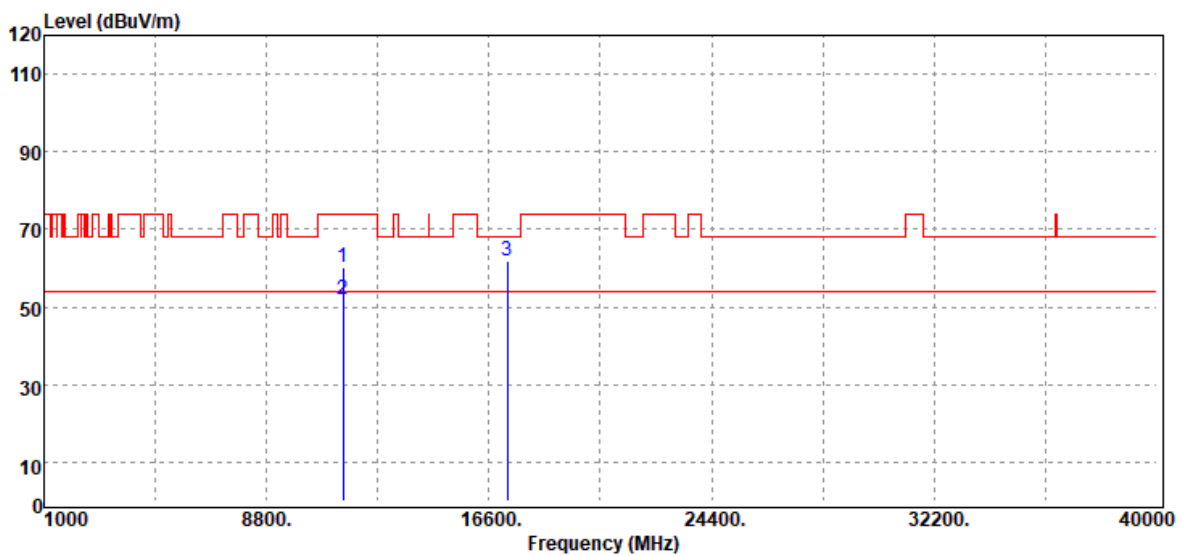

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	40.57	19.69	60.26	74.00	-13.74
11490.00	Average	32.42	19.69	52.11	54.00	-1.89
17235.00	Peak	31.67	30.02	61.69	68.20	-6.51
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

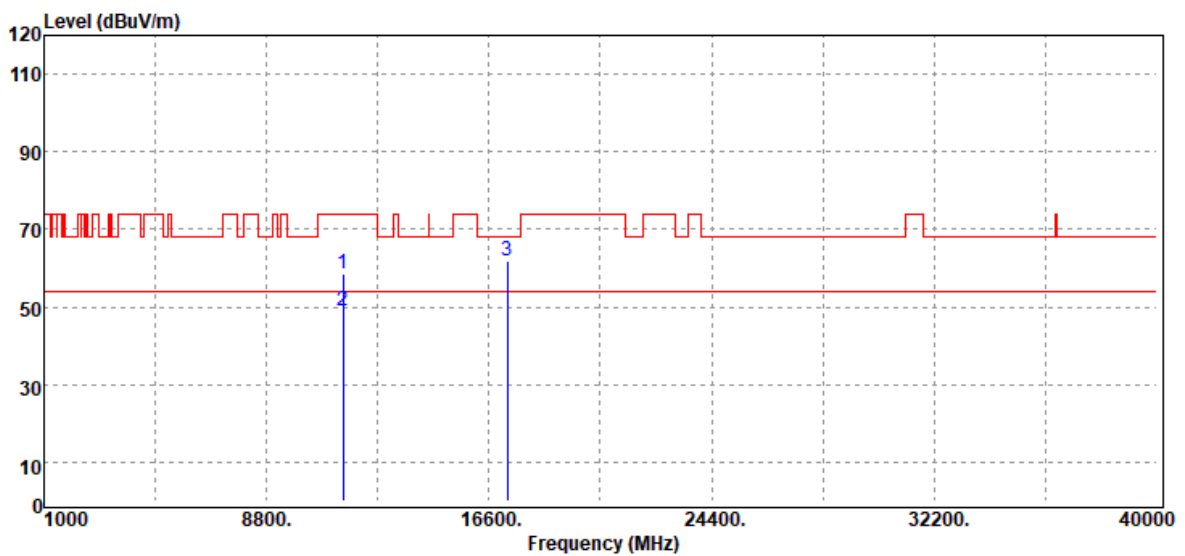


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	39.00	19.69	58.69	74.00	-15.31
11490.00	Average	29.12	19.69	48.81	54.00	-5.19
17235.00	Peak	31.79	30.02	61.81	68.20	-6.39
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5785MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

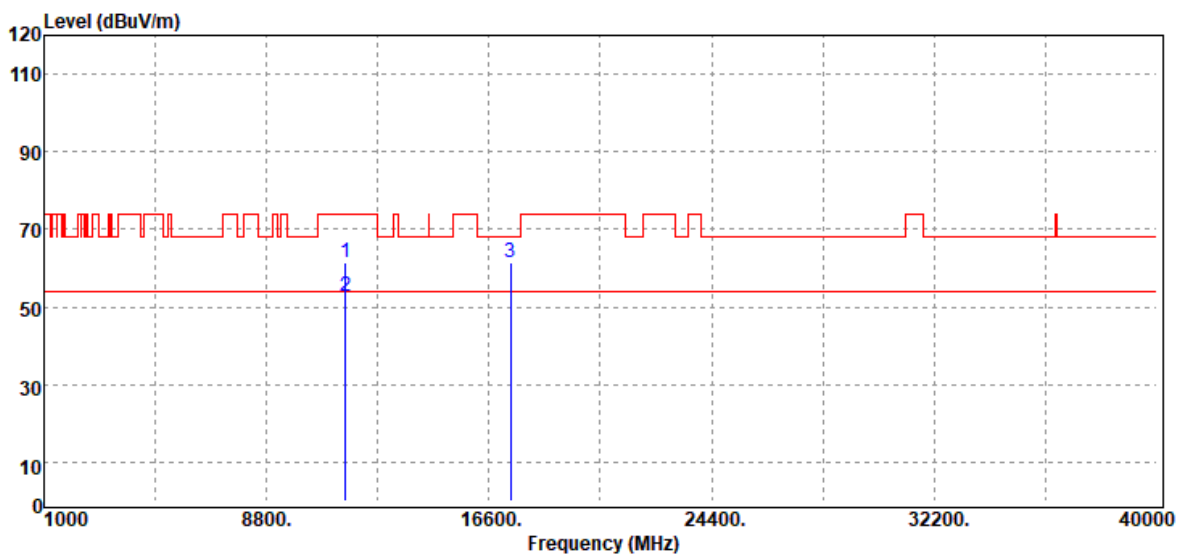


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	41.54	19.83	61.37	74.00	-12.63
11570.00	Average	32.84	19.83	52.67	54.00	-1.33
17355.00	Peak	31.94	29.34	61.28	68.20	-6.92
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5785MHz_106/54	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

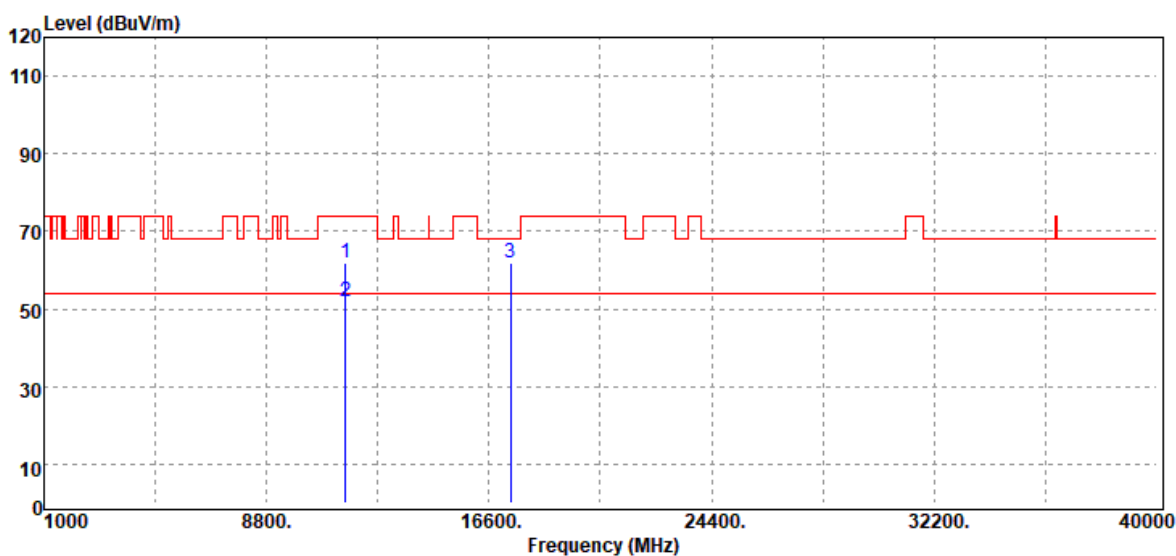


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	41.84	19.83	61.67	74.00	-12.33
11570.00	Average	32.26	19.83	52.09	54.00	-1.91
17355.00	Peak	32.45	29.34	61.79	68.20	-6.41
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

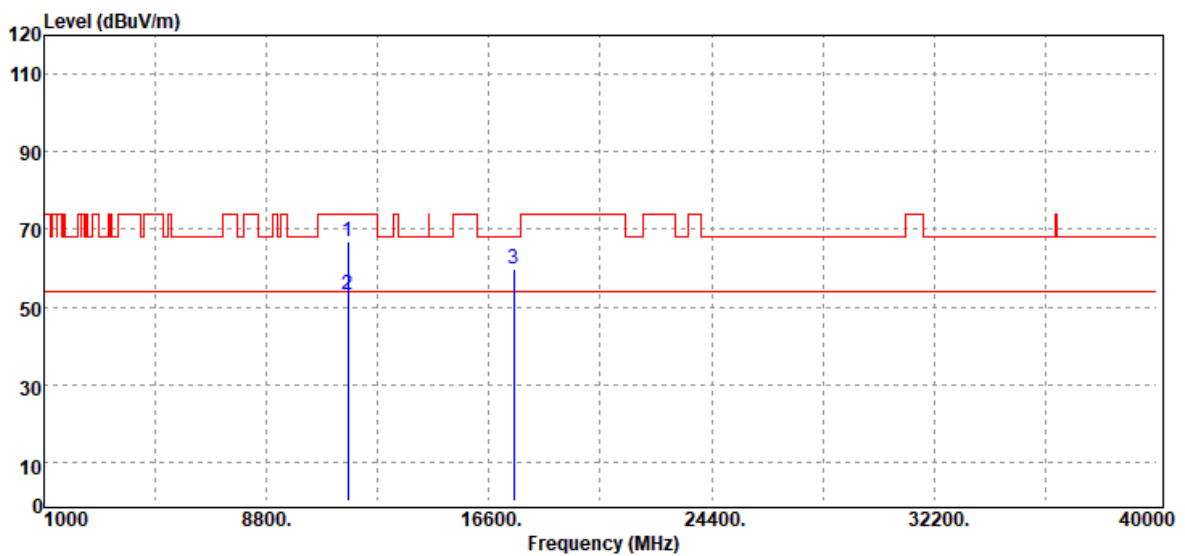


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.00	Peak	46.95	19.90	66.85	74.00	-7.15
11650.00	Average	33.36	19.90	53.26	54.00	-0.74
17475.00	Peak	30.82	29.11	59.93	68.20	-8.27
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_26/8	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

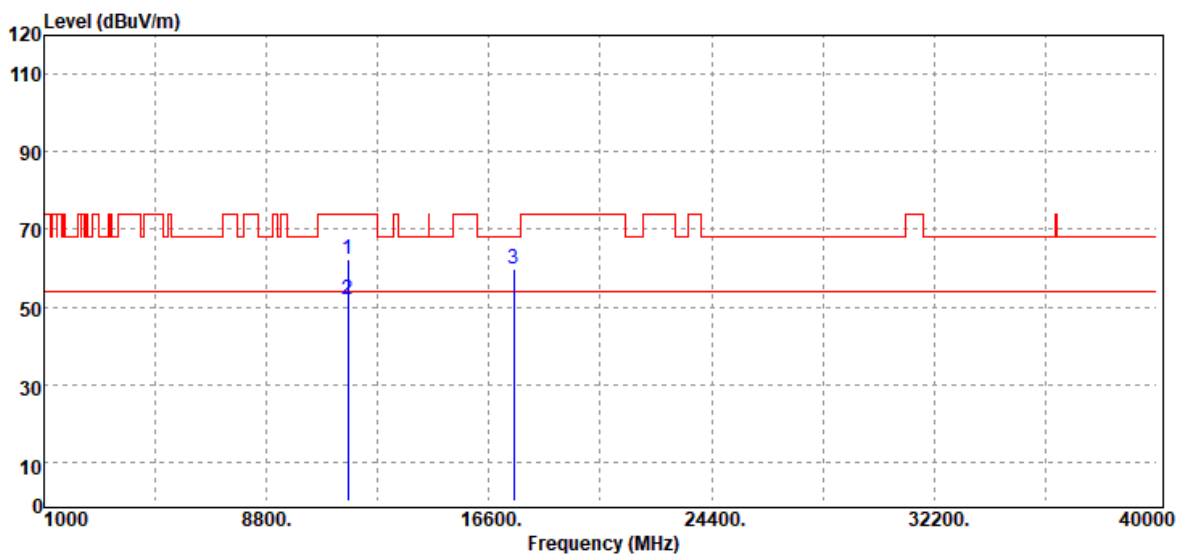


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.00	Peak	42.57	19.90	62.47	74.00	-11.53
11650.00	Average	31.85	19.90	51.75	54.00	-2.25
17475.00	Peak	30.82	29.11	59.93	68.20	-8.27
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

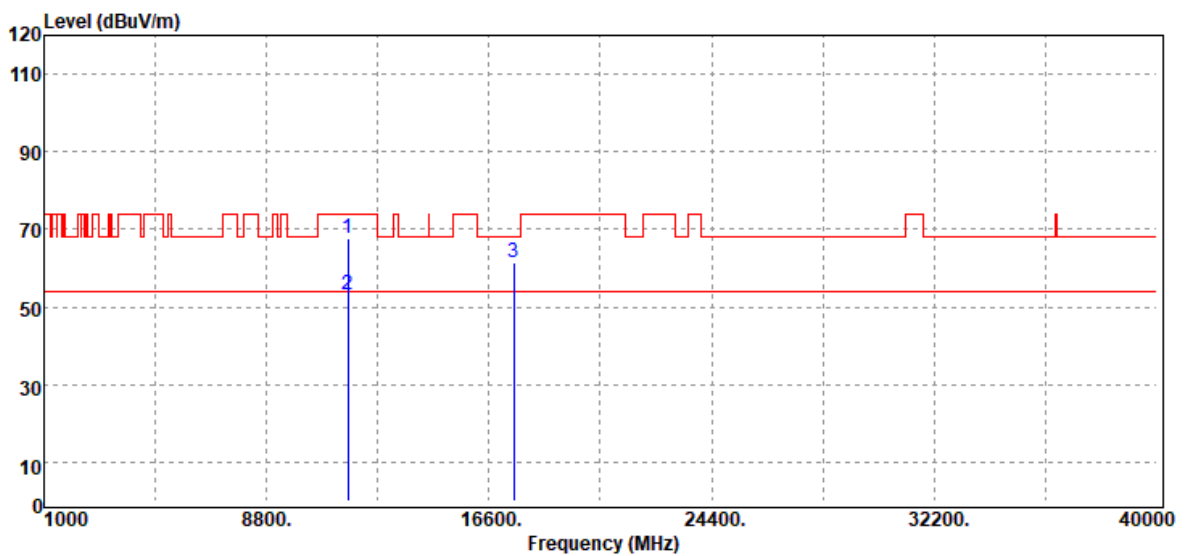


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.00	Peak	47.65	19.90	67.55	74.00	-6.45
11650.00	Average	33.28	19.90	53.18	54.00	-0.82
17475.00	Peak	32.17	29.11	61.28	68.20	-6.92
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_52/40	Temp/Hum	20.9(°C) / 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

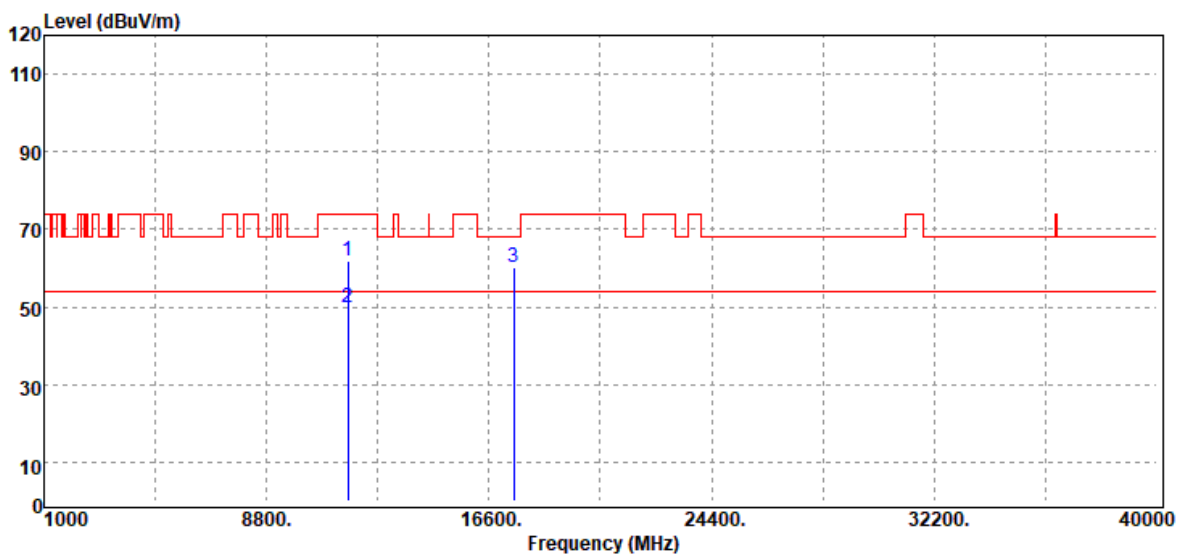


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	41.97	19.90	61.87	74.00	-12.13
11650.00	Average	29.82	19.90	49.72	54.00	-4.28
17475.00	Peak	31.23	29.11	60.34	68.20	-7.86
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

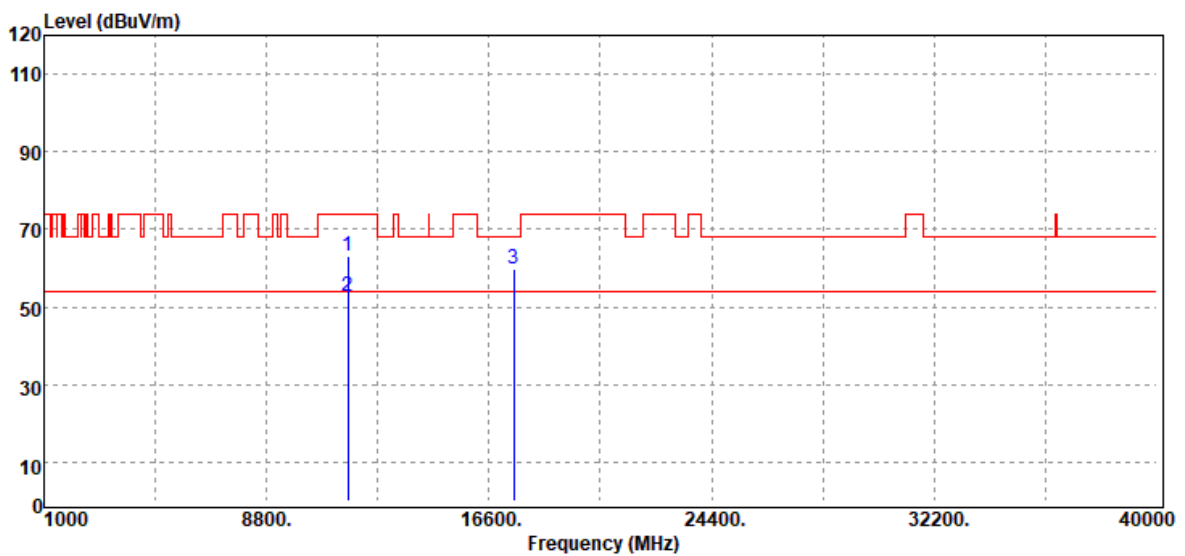

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	43.20	19.90	63.10	74.00	-10.90
11650.00	Average	32.84	19.90	52.74	54.00	-1.26
17475.00	Peak	30.84	29.11	59.95	68.20	-8.25
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	20.9(°C)/ 56%RH
Test Item	Harmonic	Test Date	November 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

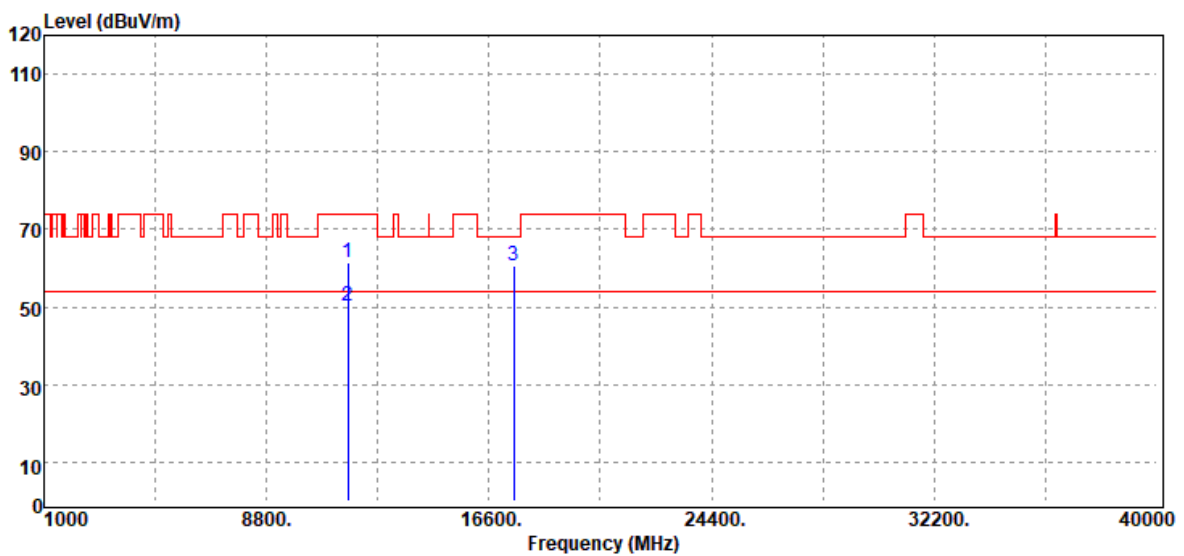


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	41.73	19.90	61.63	74.00	-12.37
11650.00	Average	30.19	19.90	50.09	54.00	-3.91
17475.00	Peak	31.58	29.11	60.69	68.20	-7.51
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

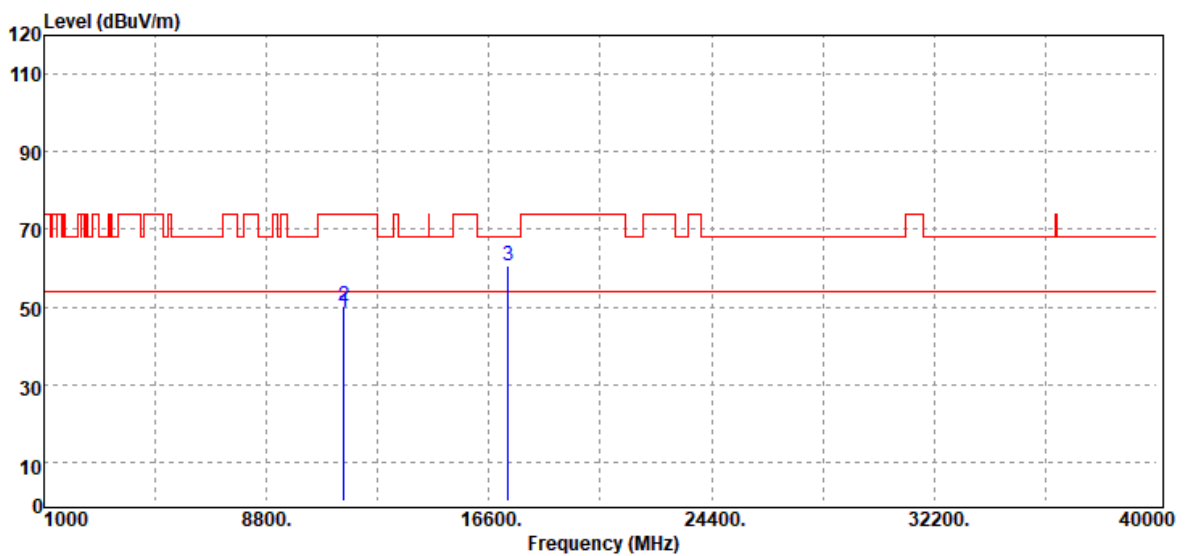


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11510.00	Peak	28.69	19.72	48.41	74.00	-25.59
11510.00	Average	30.34	19.72	50.06	54.00	-3.94
17265.00	Peak	30.78	29.80	60.58	68.20	-7.62
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak and Average		

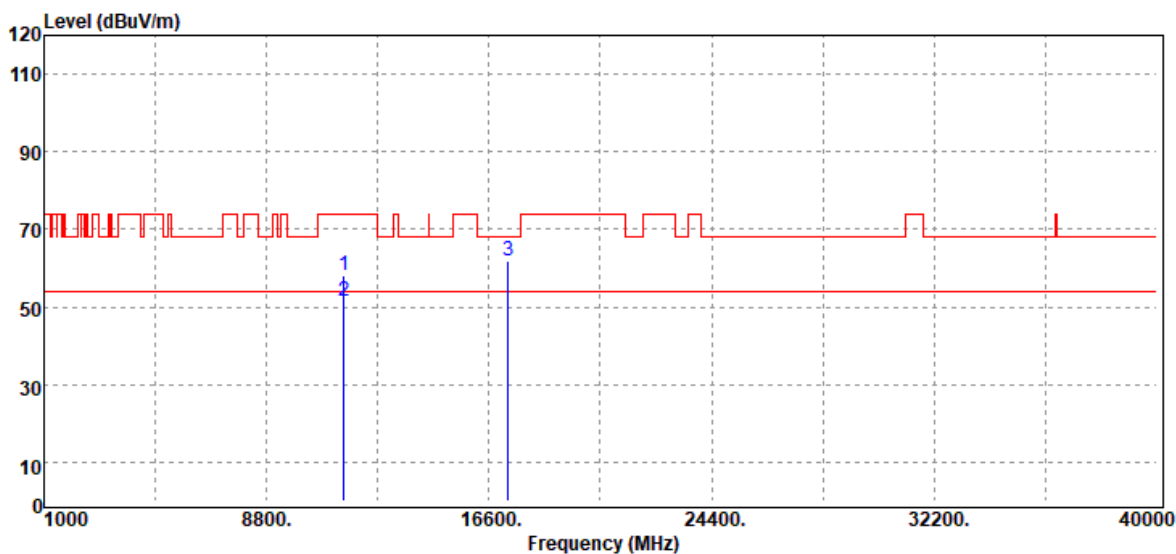


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11510.00	Peak	38.55	19.72	58.27	74.00	-15.73
11510.00	Average	31.91	19.72	51.63	54.00	-2.37
17265.00	Peak	31.93	29.80	61.73	68.20	-6.47
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak and Average		

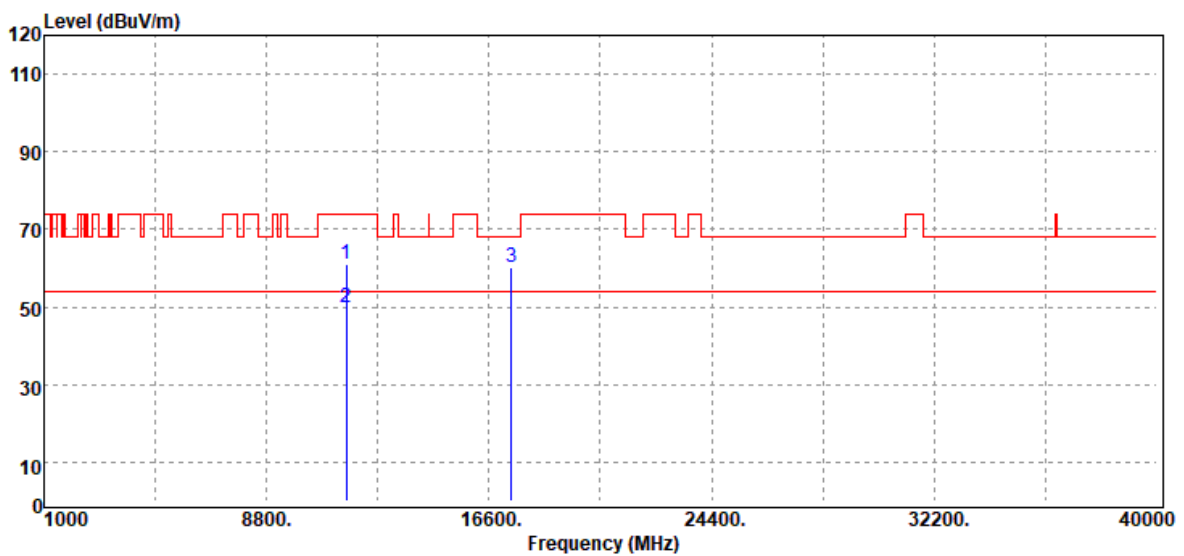


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	41.08	19.87	60.95	74.00	-13.05
11590.00	Average	29.81	19.87	49.68	54.00	-4.32
17385.00	Peak	31.16	29.24	60.40	68.20	-7.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

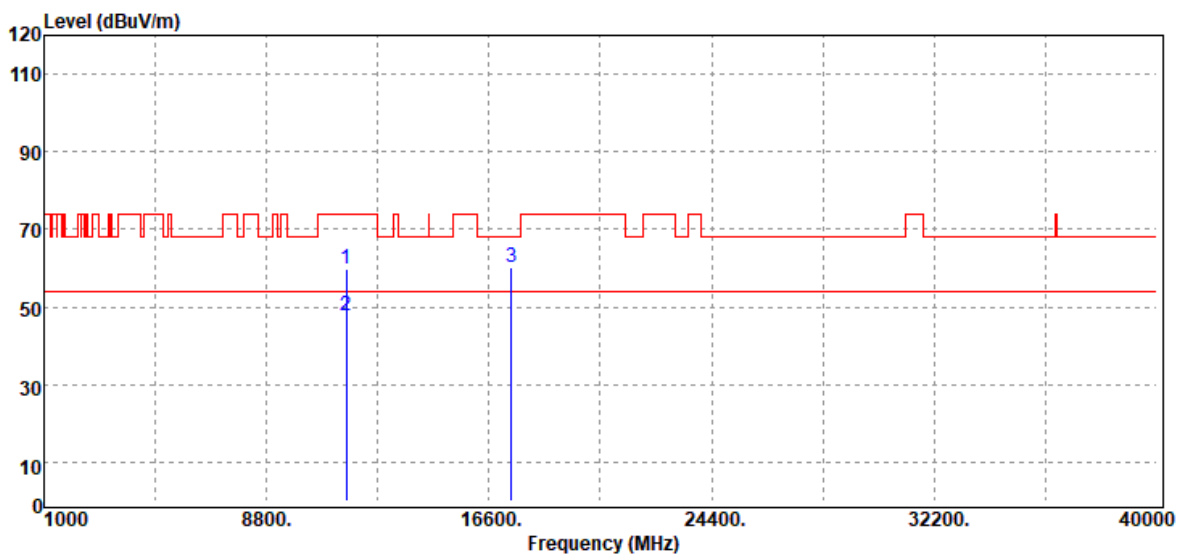


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11590.00	Peak	39.74	19.87	59.61	74.00	-14.39
11590.00	Average	27.93	19.87	47.80	54.00	-6.20
17385.00	Peak	31.10	29.24	60.34	68.20	-7.86
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775 MHz_106/53	Temp/Hum	20.6(°C) / 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

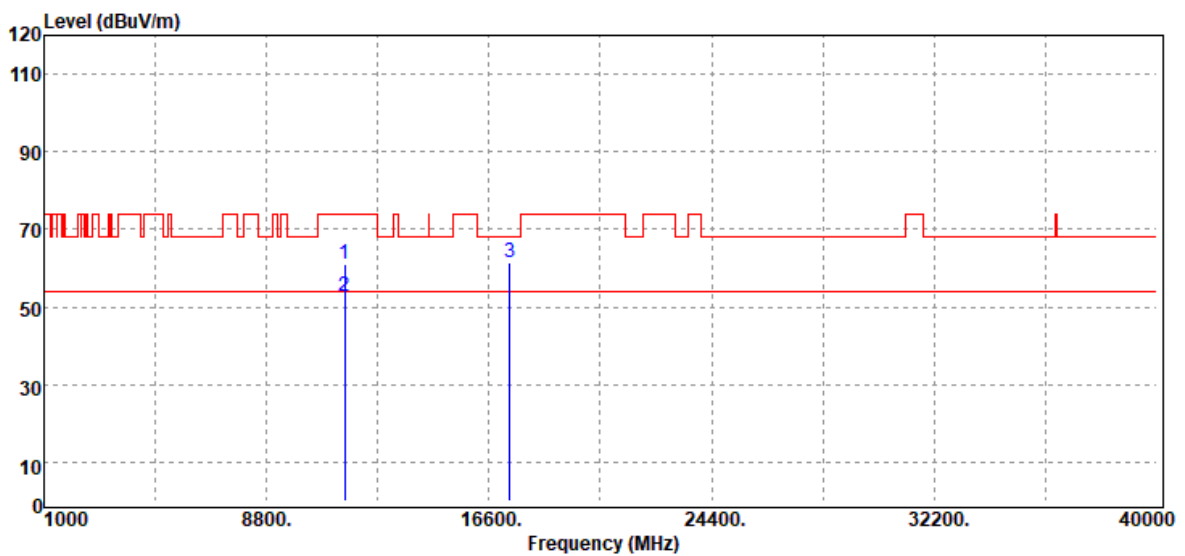


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	41.35	19.80	61.15	74.00	-12.85
11550.00	Average	32.86	19.80	52.66	54.00	-1.34
17325.00	Peak	32.02	29.48	61.50	68.20	-6.70
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/53	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

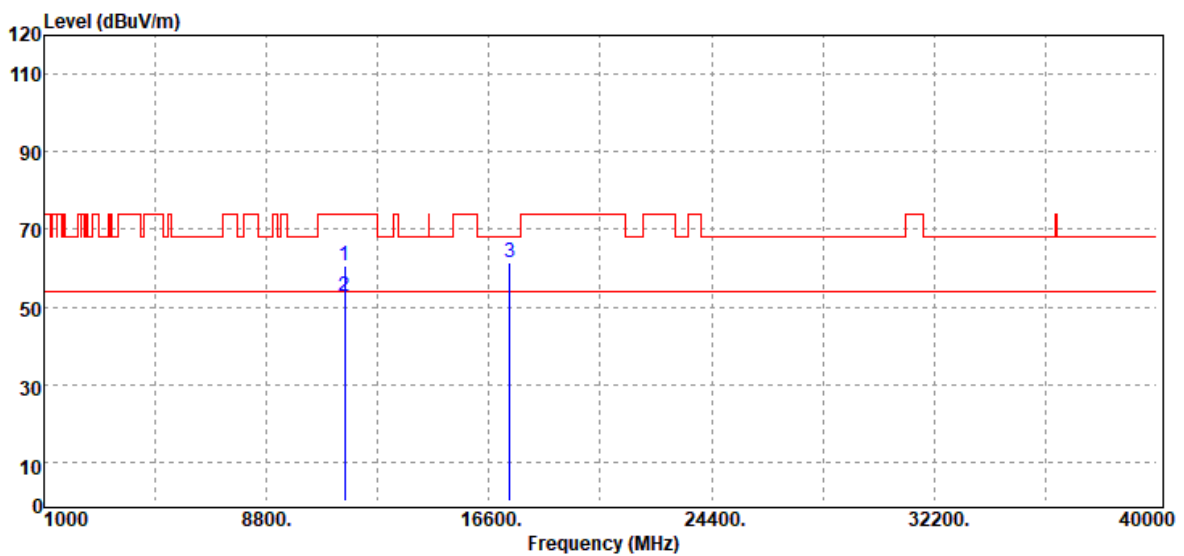


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11550.00	Peak	41.02	19.80	60.82	74.00	-13.18
11550.00	Average	32.99	19.80	52.79	54.00	-1.21
17325.00	Peak	31.94	29.48	61.42	68.20	-6.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak and Average		

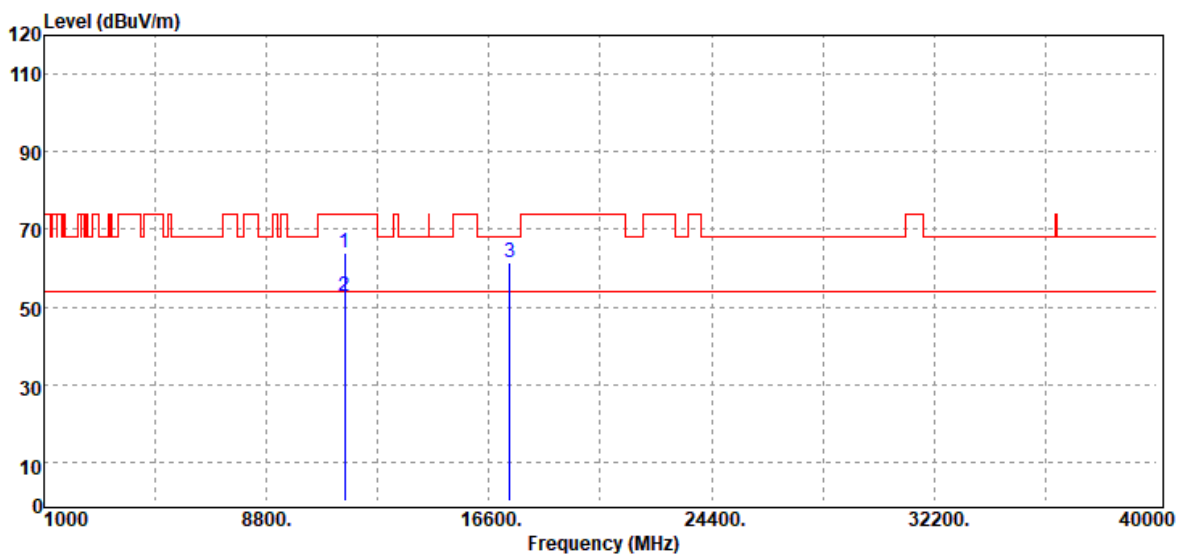

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11550.00	Peak	44.08	19.80	63.88	74.00	-10.12
11550.00	Average	32.96	19.80	52.76	54.00	-1.24
17325.00	Peak	31.93	29.48	61.41	68.20	-6.79
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	20.6(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak and Average		

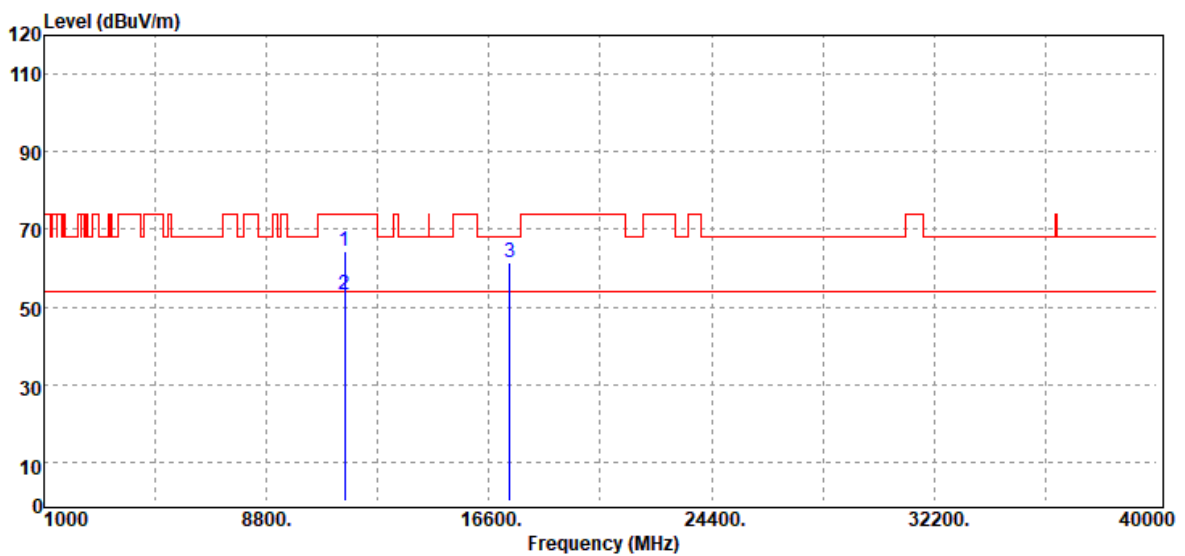

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11550.00	Peak	44.63	19.80	64.43	74.00	-9.57
11550.00	Average	33.28	19.80	53.08	54.00	-0.92
17325.00	Peak	32.01	29.48	61.49	68.20	-6.71
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

-- End of Test Report --