


### 4.5.4 Test Result

#### Band Edge Test Data: Non-Beamforming

#### Test Data for UNII-1


#### (1) Chain 0

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

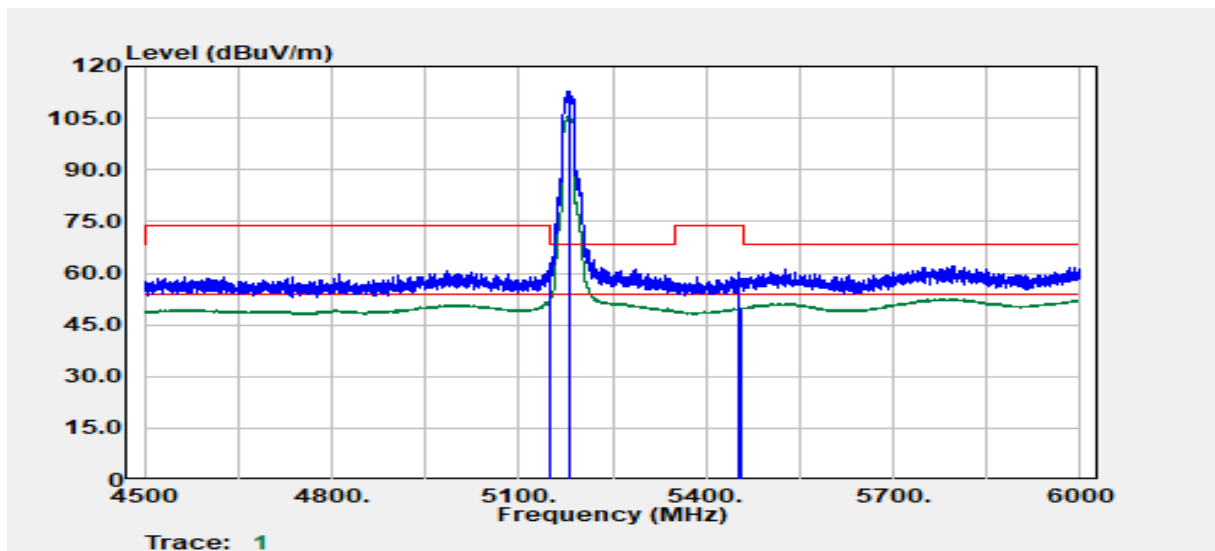

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.20	Peak	49.10	12.16	61.26	74.00	-12.74
5149.80	Average	41.19	12.16	53.35	54.00	-0.65
5180.00	Peak	100.81	12.10	112.91	--	--
5180.00	Average	93.60	12.10	105.70	--	--
5451.60	Peak	47.73	12.38	60.11	74.00	-13.89
5457.00	Average	37.57	12.40	49.97	54.00	-4.03

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

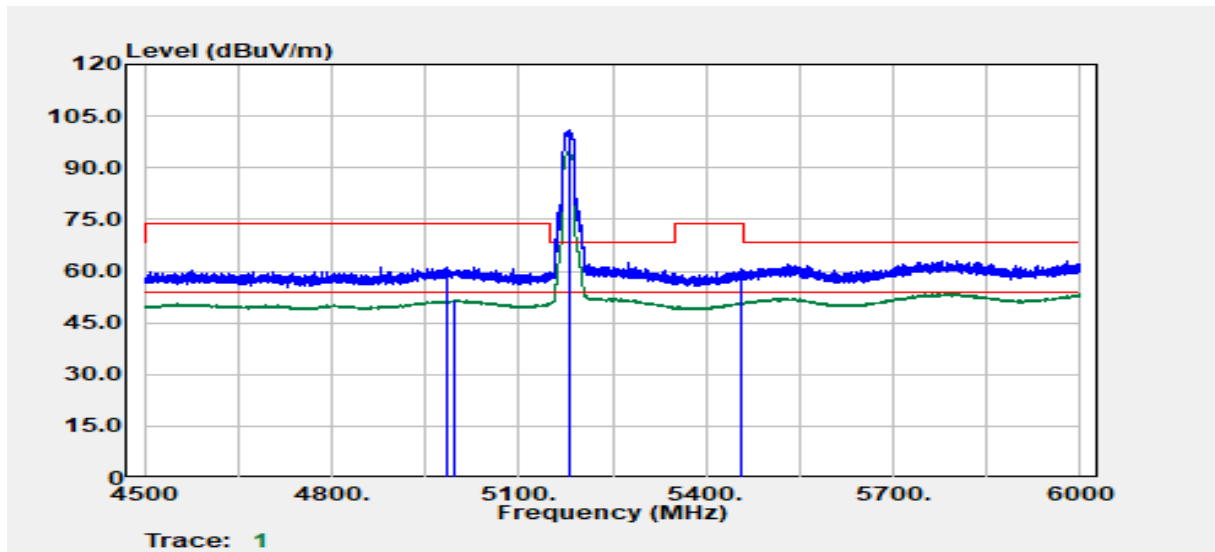


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4985.40	Peak	49.75	11.48	61.23	74.00	-12.77
4995.30	Average	39.90	11.57	51.47	54.00	-2.53
5180.00	Peak	89.07	12.10	101.17	--	--
5180.00	Average	82.70	12.10	94.80	--	--
5455.20	Average	38.44	12.39	50.83	54.00	-3.17
5456.40	Peak	48.22	12.40	60.62	74.00	-13.38

**Test Data for UNII-1**


**(2) Chain 1**

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

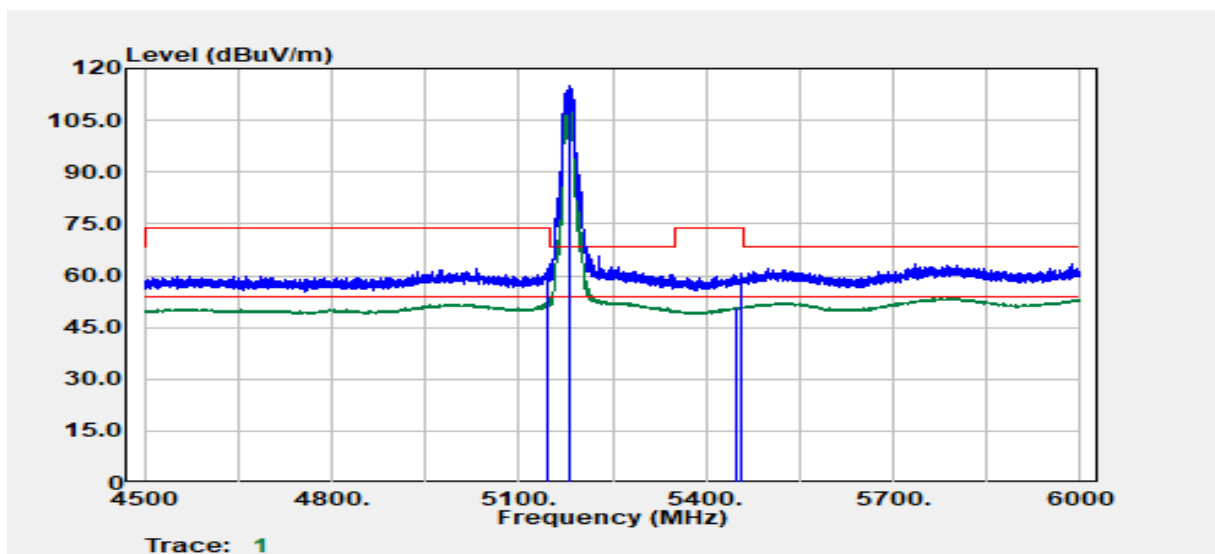

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5145.60	Average	40.45	12.15	52.60	54.00	-1.40
5147.40	Peak	49.78	12.15	61.94	74.00	-12.06
5180.00	Peak	102.98	12.10	115.08	--	--
5180.00	Average	96.83	12.10	108.93	--	--
5450.10	Average	38.56	12.38	50.93	54.00	-3.07
5457.90	Peak	48.34	12.40	60.74	74.00	-13.26

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

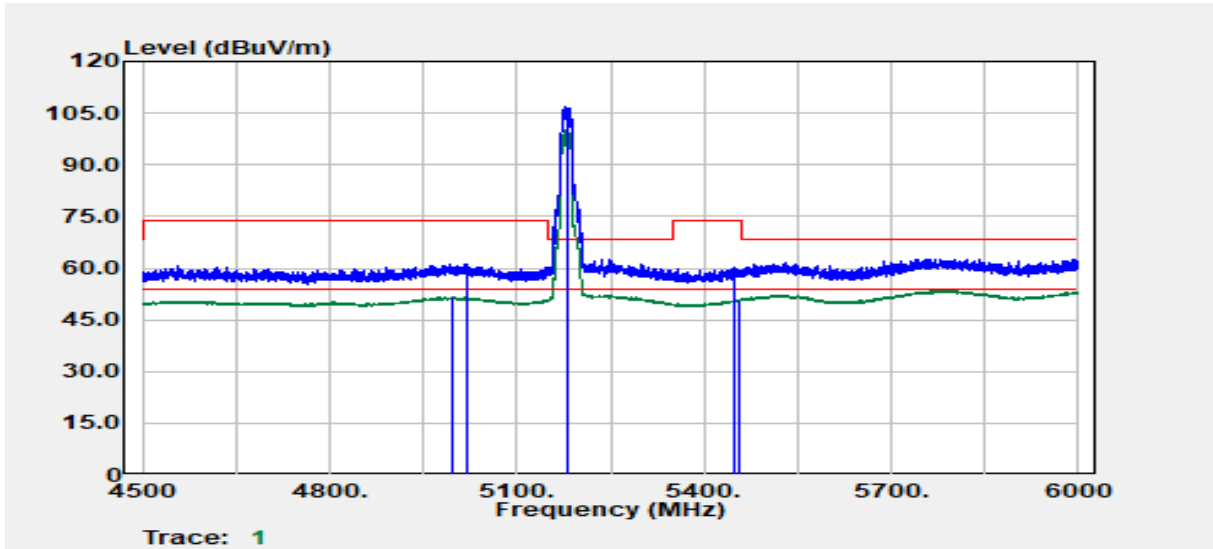


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4997.10	Average	39.98	11.58	51.56	54.00	-2.44
5018.70	Peak	49.31	11.74	61.05	74.00	-12.95
5180.00	Peak	94.71	12.10	106.81	--	--
5180.00	Average	87.99	12.10	100.09	--	--
5447.10	Peak	47.85	12.37	60.22	74.00	-13.78
5457.60	Average	38.50	12.40	50.91	54.00	-3.09

**Test Data for UNII-1**


**(3) Chain 2**

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

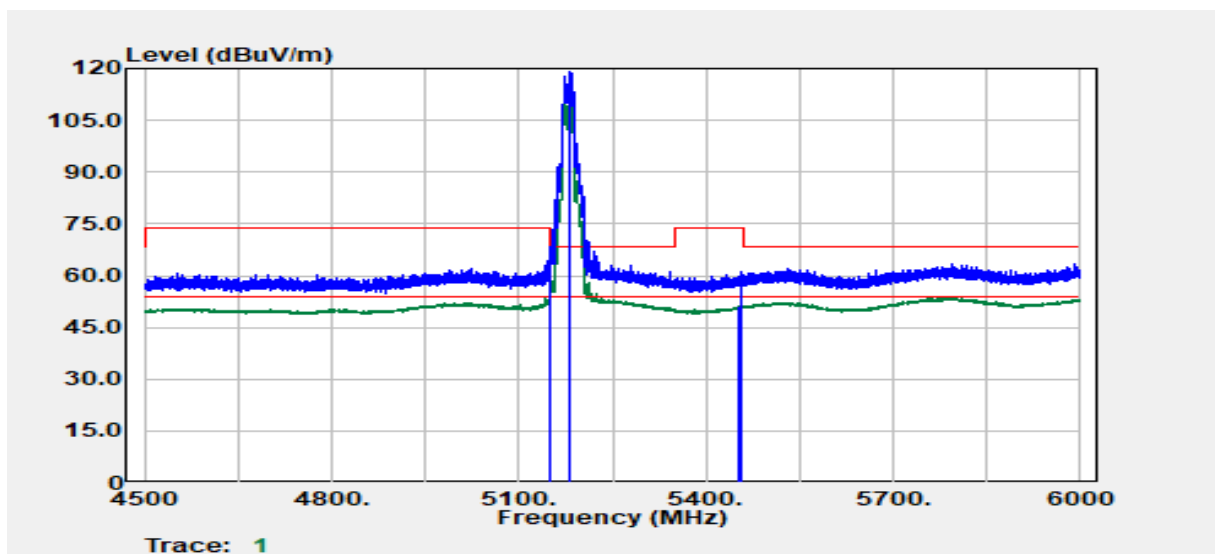

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5148.00	Peak	52.58	12.16	64.74	74.00	-9.26
5148.60	Average	41.51	12.16	53.67	54.00	-0.33
5180.00	Peak	107.16	12.10	119.26	--	--
5180.00	Average	100.69	12.10	112.79	--	--
5454.30	Average	38.58	12.39	50.97	54.00	-3.03
5457.15	Peak	48.75	12.40	61.15	74.00	-12.85

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

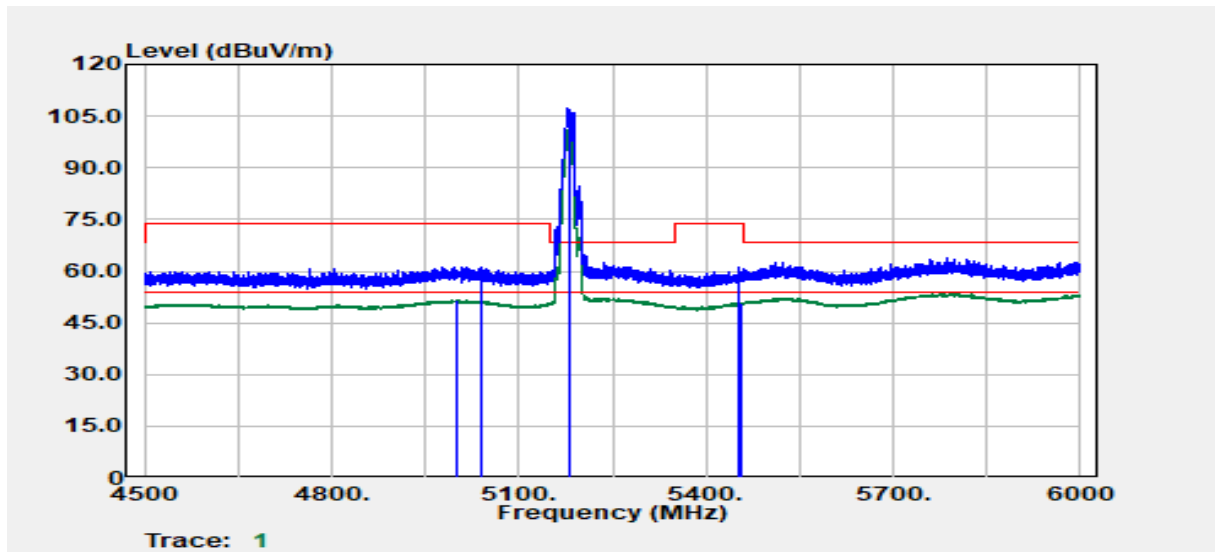


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5002.20	Average	40.00	11.62	51.62	54.00	-2.38
5039.10	Peak	49.37	11.88	61.25	74.00	-12.75
5180.00	Peak	95.30	12.10	107.40	--	--
5180.00	Average	88.96	12.10	101.06	--	--
5451.15	Peak	48.60	12.38	60.98	74.00	-13.02
5457.45	Average	38.52	12.40	50.92	54.00	-3.08

**Test Data for UNII-1**


**(4) MIMO**

Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

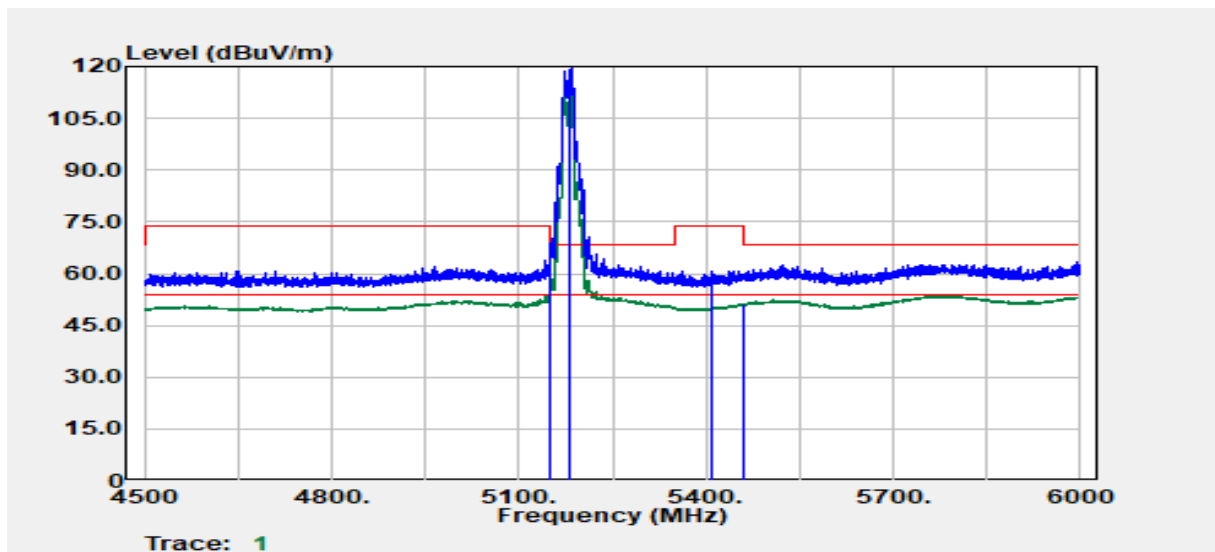

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5148.90	Average	41.02	12.16	53.18	54.00	-0.82
5149.20	Peak	56.62	12.16	68.78	74.00	-5.22
5180.00	Peak	107.32	12.10	119.42	--	--
5180.00	Average	100.87	12.10	112.97	--	--
5409.90	Peak	48.50	12.33	60.83	74.00	-13.17
5460.00	Average	38.72	12.41	51.13	54.00	-2.87


Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

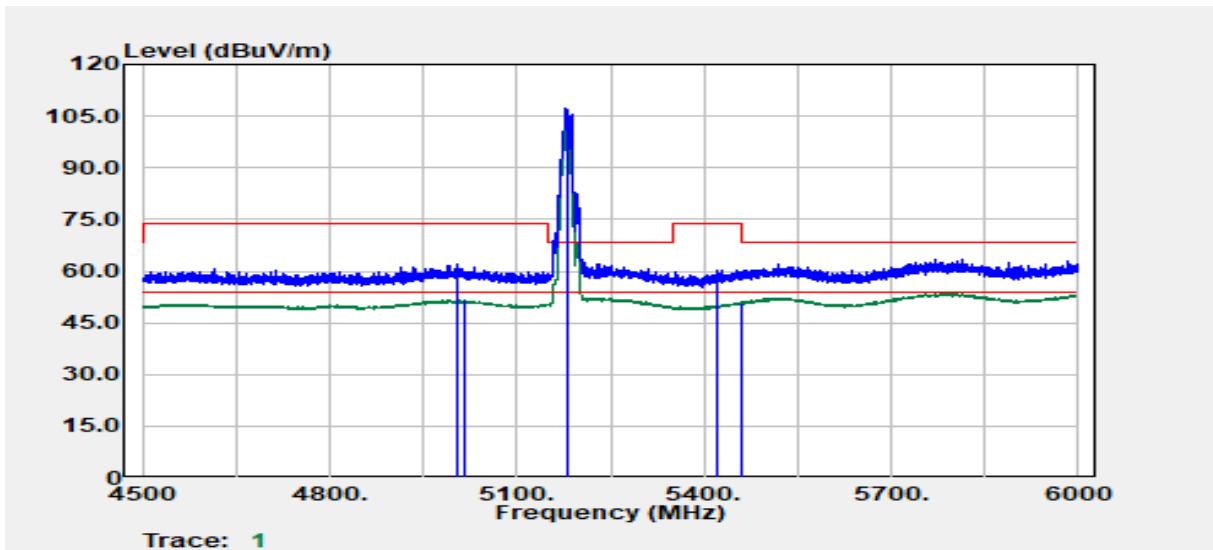

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5002.80	Peak	50.29	11.63	61.92	74.00	-12.08
5014.80	Average	39.80	11.71	51.51	54.00	-2.49
5180.00	Peak	95.40	12.10	107.50	--	--
5180.00	Average	88.76	12.10	100.86	--	--
5421.30	Peak	47.89	12.34	60.23	74.00	-13.77
5460.00	Average	38.53	12.41	50.94	54.00	-3.06




Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

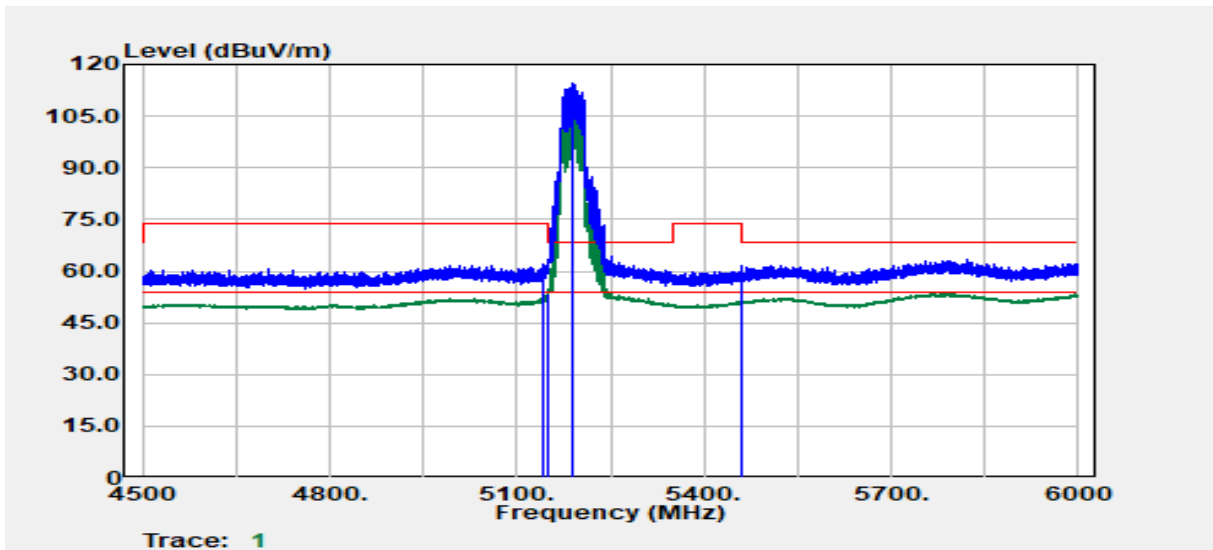


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5142.75	Peak	50.00	12.14	62.14	74.00	-11.86
5148.60	Average	41.14	12.16	53.30	54.00	-0.70
5190.00	Peak	102.56	12.08	114.64	--	--
5190.00	Average	95.67	12.08	107.75	--	--
5459.25	Peak	47.62	12.41	60.03	74.00	-13.97
5460.00	Average	38.68	12.41	51.09	54.00	-2.91

Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

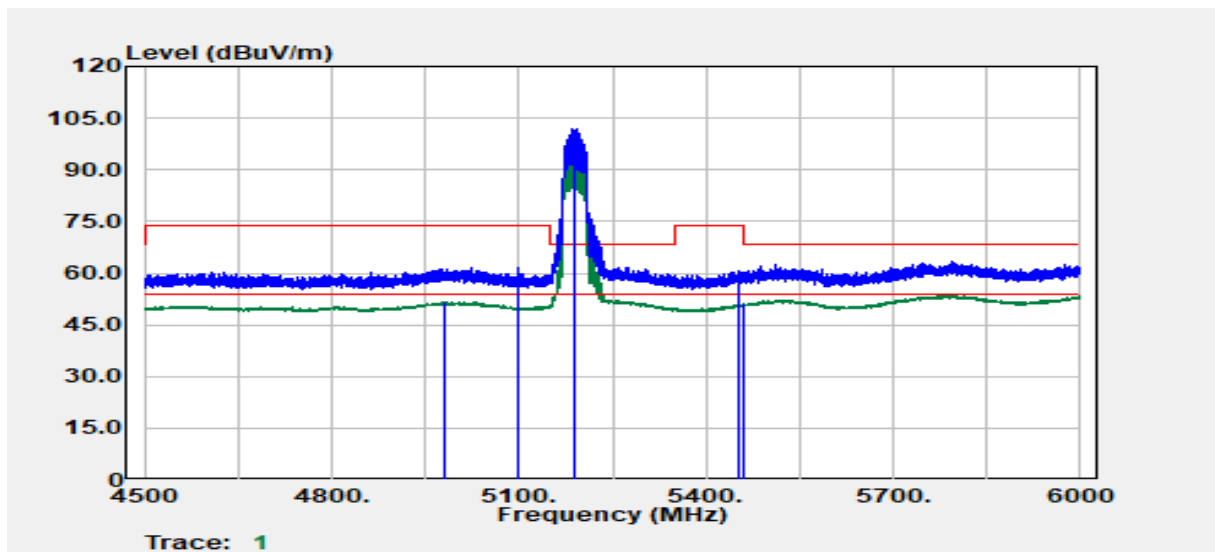


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4980.90	Average	40.34	11.44	51.77	54.00	-2.23
5099.55	Peak	49.58	12.05	61.63	74.00	-12.37
5190.00	Peak	89.74	12.08	101.82	--	--
5190.00	Average	83.11	12.08	95.19	--	--
5451.30	Peak	48.28	12.38	60.66	74.00	-13.34
5458.80	Average	38.61	12.41	51.02	54.00	-2.98

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

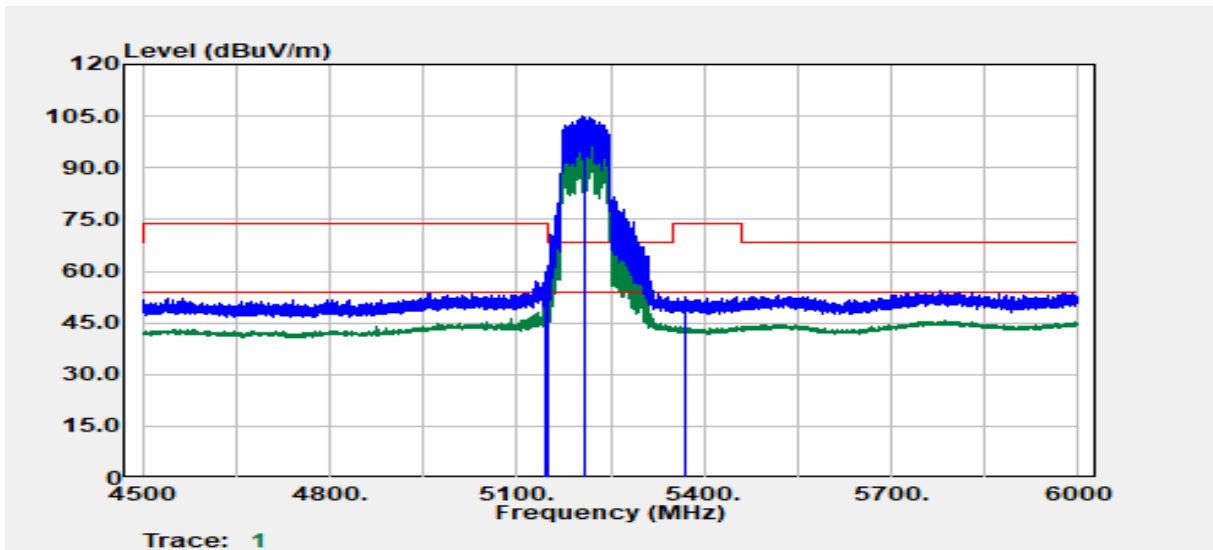


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5145.60	Peak	47.71	12.15	59.86	74.00	-14.14
5149.95	Average	41.16	12.16	53.32	54.00	-0.68
5210.00	Peak	92.97	12.06	105.02	--	--
5210.00	Average	86.88	12.06	98.93	--	--
5369.85	Average	33.88	12.21	46.09	54.00	-7.91
5370.15	Peak	40.19	12.21	52.40	74.00	-21.60

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

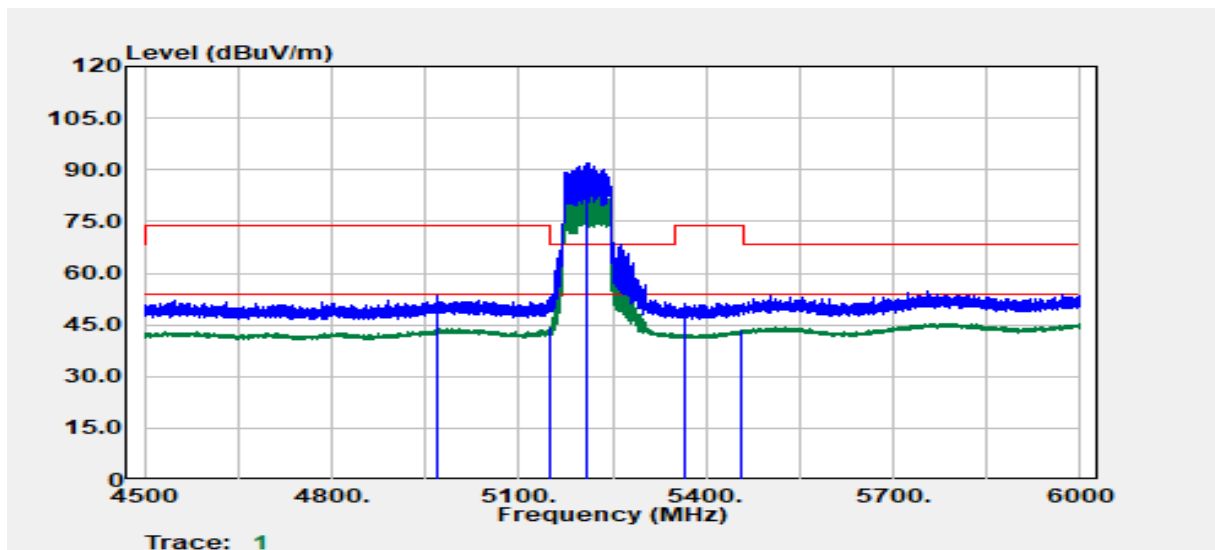


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4971.00	Peak	41.98	11.35	53.33	74.00	-20.67
5149.05	Average	32.01	12.16	44.17	54.00	-9.83
5210.00	Peak	79.68	12.06	91.74	--	--
5210.00	Average	73.31	12.06	85.36	--	--
5364.90	Peak	39.10	12.19	51.28	74.00	-22.72
5455.20	Average	31.00	12.39	43.39	54.00	-10.61

Test Mode	IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

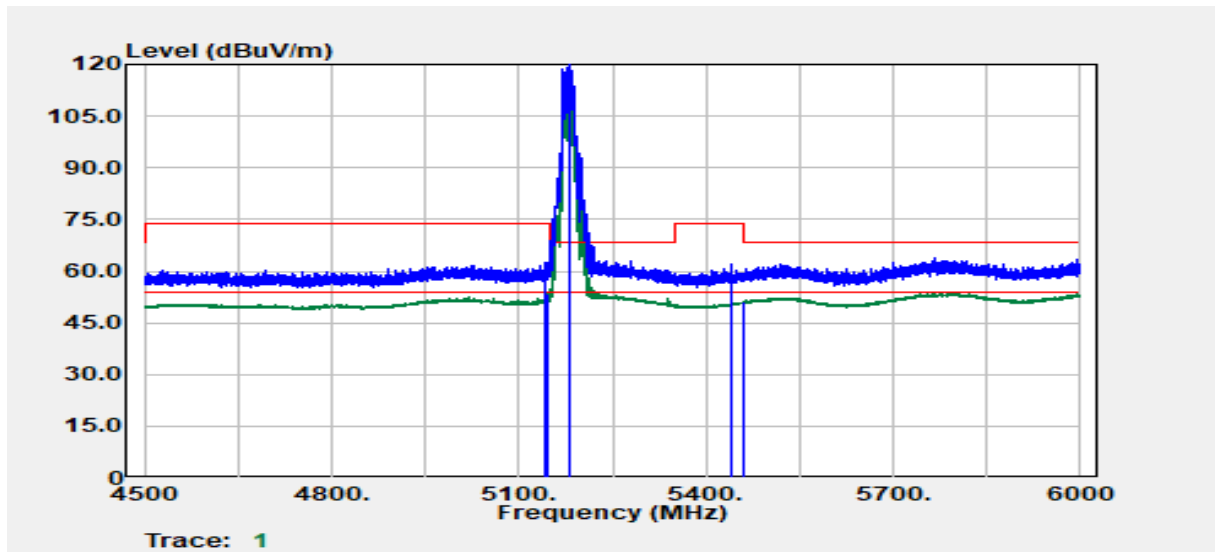


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5140.80	Peak	50.44	12.14	62.58	74.00	-11.42
5145.90	Average	41.27	12.15	53.42	54.00	-0.58
5180.00	Peak	108.27	12.10	120.37	--	--
5180.00	Average	99.86	12.10	111.96	--	--
5442.15	Peak	49.59	12.37	61.96	74.00	-12.04
5459.70	Average	38.67	12.41	51.08	54.00	-2.92

Test Mode	IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

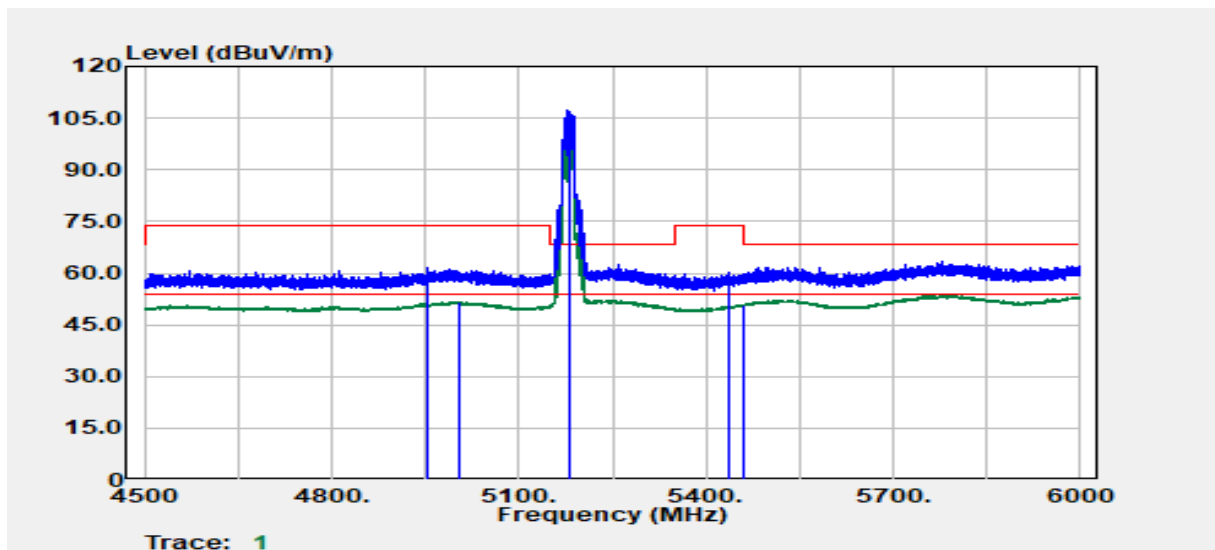


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4955.25	Peak	50.51	11.20	61.72	74.00	-12.28
5005.80	Average	40.02	11.65	51.67	54.00	-2.33
5180.00	Peak	95.10	12.10	107.20	--	--
5180.00	Average	86.82	12.10	98.92	--	--
5437.95	Peak	47.95	12.36	60.31	74.00	-13.69
5459.55	Average	38.43	12.41	50.84	54.00	-3.16

Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

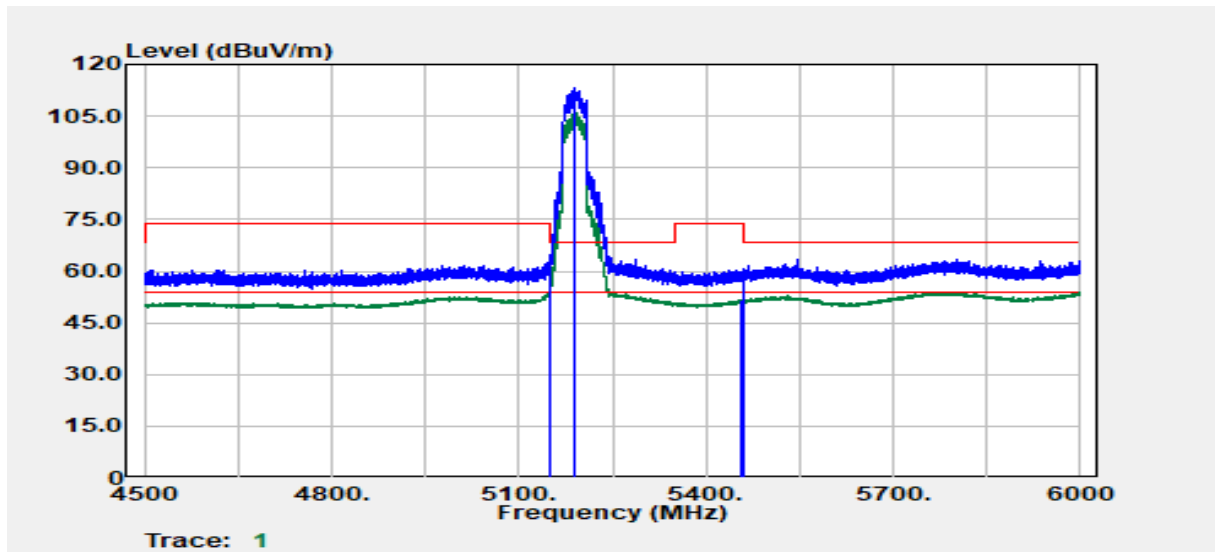

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5149.20	Peak	51.88	12.16	64.03	74.00	-9.97
5149.80	Average	41.38	12.16	53.54	54.00	-0.46
5190.00	Peak	101.08	12.08	113.16	--	--
5190.00	Average	93.81	12.08	105.89	--	--
5457.75	Average	39.37	12.40	51.78	54.00	-2.22
5458.65	Peak	48.09	12.41	60.50	74.00	-13.50


Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

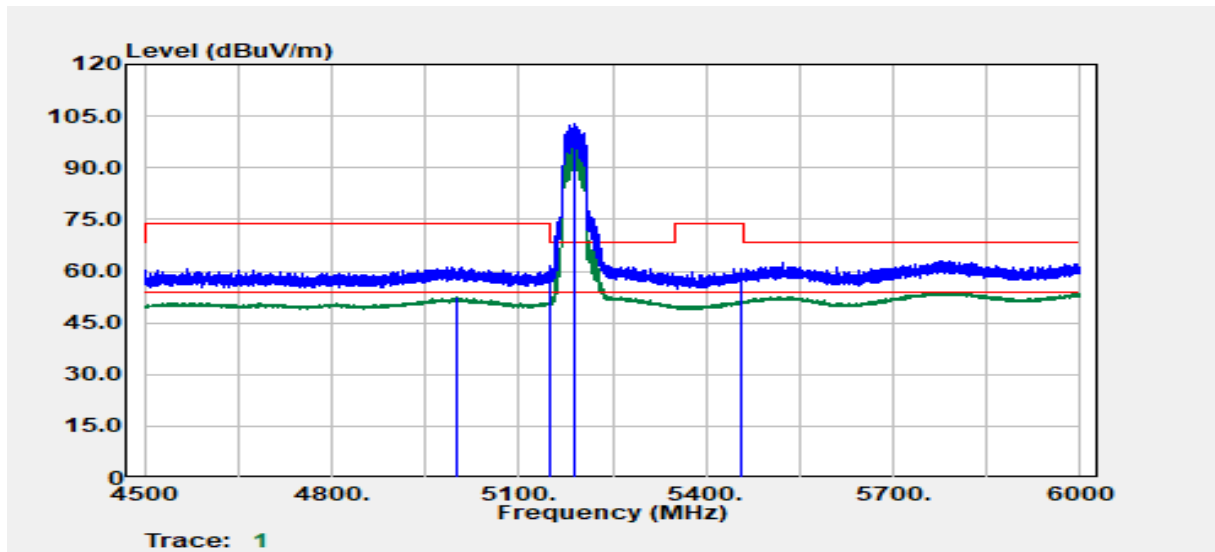

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4998.60	Average	40.71	11.60	52.31	54.00	-1.69
5148.30	Peak	49.52	12.16	61.68	74.00	-12.32
5190.00	Peak	90.72	12.08	102.80	--	--
5190.00	Average	84.32	12.08	96.40	--	--
5455.50	Average	38.94	12.39	51.33	54.00	-2.67
5457.15	Peak	48.49	12.40	60.89	74.00	-13.11




Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

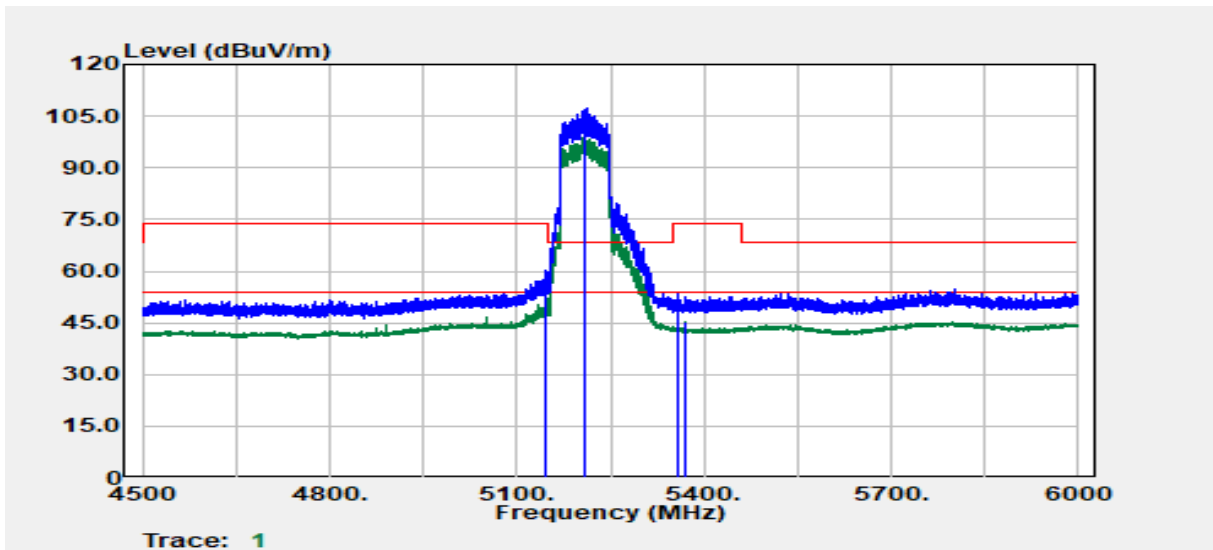

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5145.00	Average	40.16	12.15	52.31	54.00	-1.69
5146.20	Peak	47.91	12.15	60.06	74.00	-13.94
5210.00	Peak	95.22	12.06	107.28	--	--
5210.00	Average	86.60	12.06	98.66	--	--
5359.05	Peak	41.07	12.16	53.23	74.00	-20.77
5369.85	Average	33.11	12.21	45.31	54.00	-8.69

Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

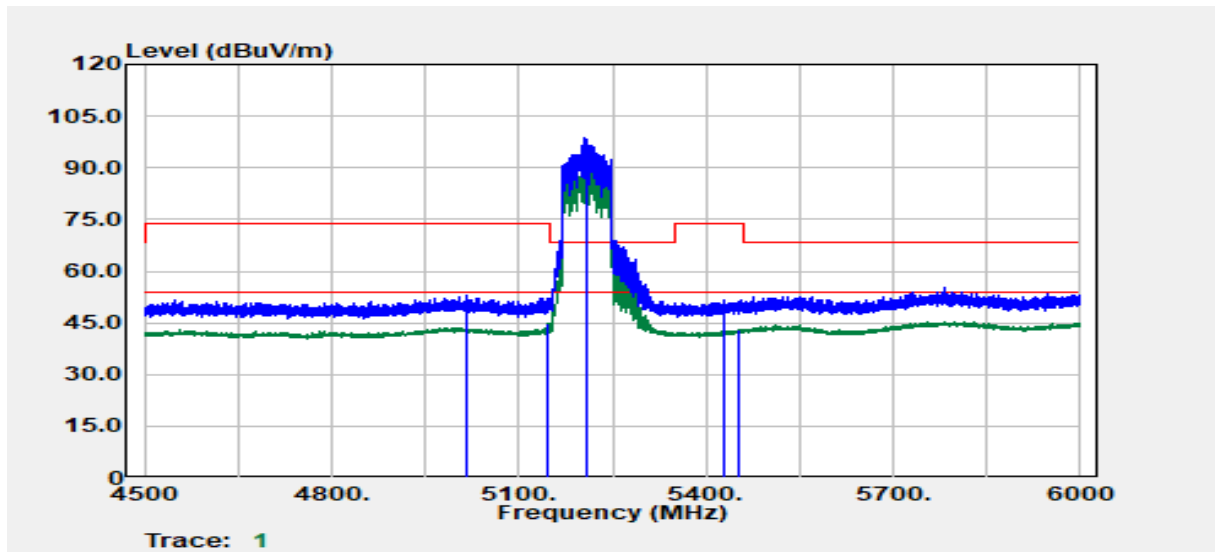


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5014.95	Peak	41.05	11.71	52.76	74.00	-21.24
5145.75	Average	32.66	12.15	44.81	54.00	-9.19
5210.00	Peak	86.79	12.06	98.85	--	--
5210.00	Average	77.08	12.06	89.14	--	--
5427.60	Peak	39.36	12.35	51.71	74.00	-22.29
5453.85	Average	30.72	12.39	43.11	54.00	-10.89

**Test Data for UNII-2a**


**(1) Chain 0**

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

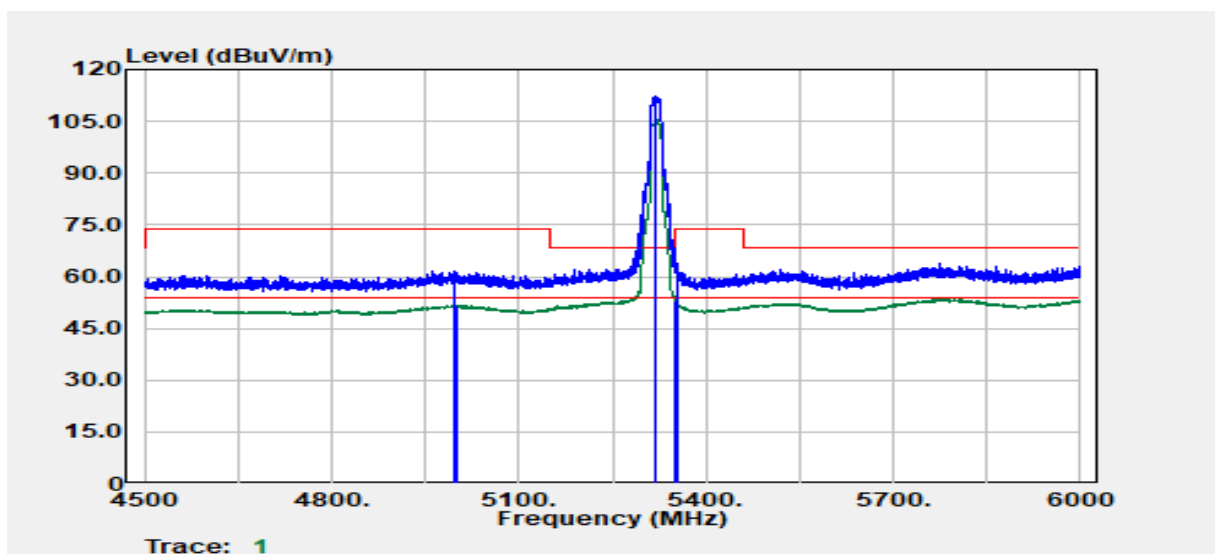

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4998.30	Peak	50.12	11.59	61.72	74.00	-12.28
5000.10	Average	40.09	11.61	51.70	54.00	-2.30
5320.00	Peak	100.04	12.14	112.18	--	--
5320.00	Average	93.35	12.14	105.49	--	--
5350.20	Average	41.04	12.13	53.17	54.00	-0.83
5353.80	Peak	51.62	12.14	63.77	74.00	-10.23

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

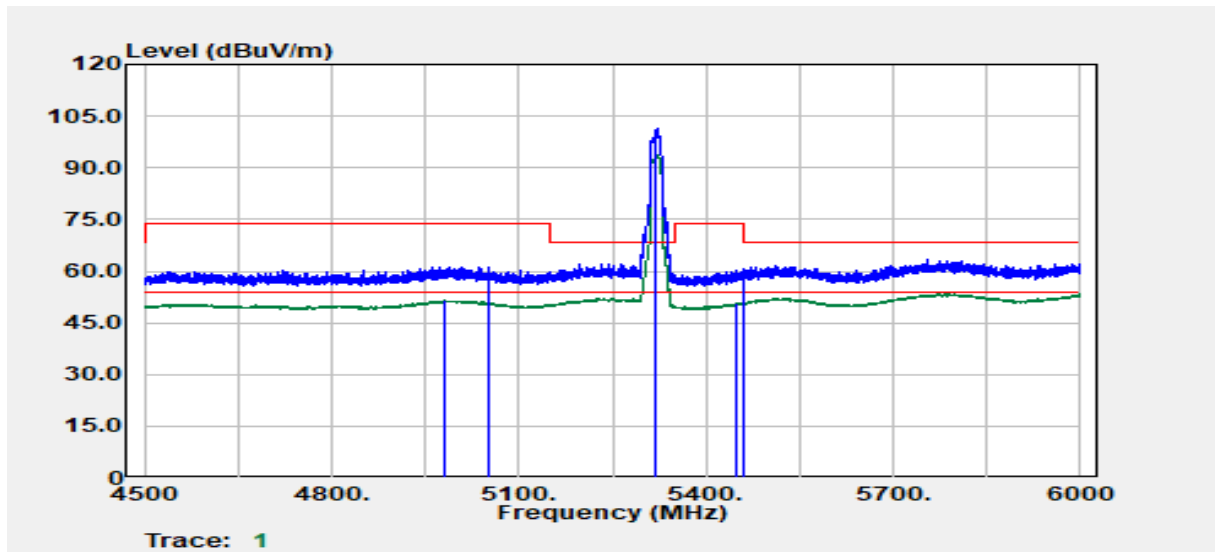


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4980.60	Average	39.97	11.43	51.41	54.00	-2.59
5052.60	Peak	49.40	11.96	61.35	74.00	-12.65
5320.00	Peak	89.48	12.14	101.63	--	--
5320.00	Average	81.72	12.14	93.86	--	--
5447.70	Average	38.48	12.37	50.85	54.00	-3.15
5459.10	Peak	48.46	12.41	60.87	74.00	-13.13

**Test Data for UNII-2a**


**(2) Chain 1**

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

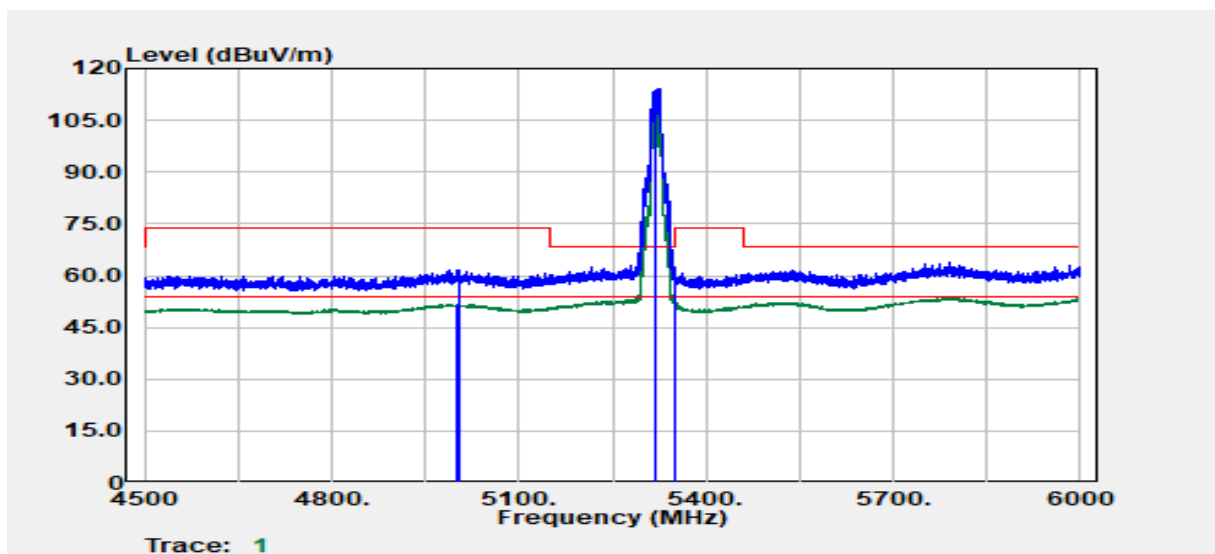

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5000.10	Average	40.09	11.61	51.70	54.00	-2.30
5003.70	Peak	50.05	11.64	61.69	74.00	-12.31
5320.00	Peak	102.02	12.14	114.17	--	--
5320.00	Average	95.81	12.14	107.96	--	--
5350.50	Average	40.45	12.13	52.58	54.00	-1.42
5351.40	Peak	49.52	12.14	61.65	74.00	-12.35

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

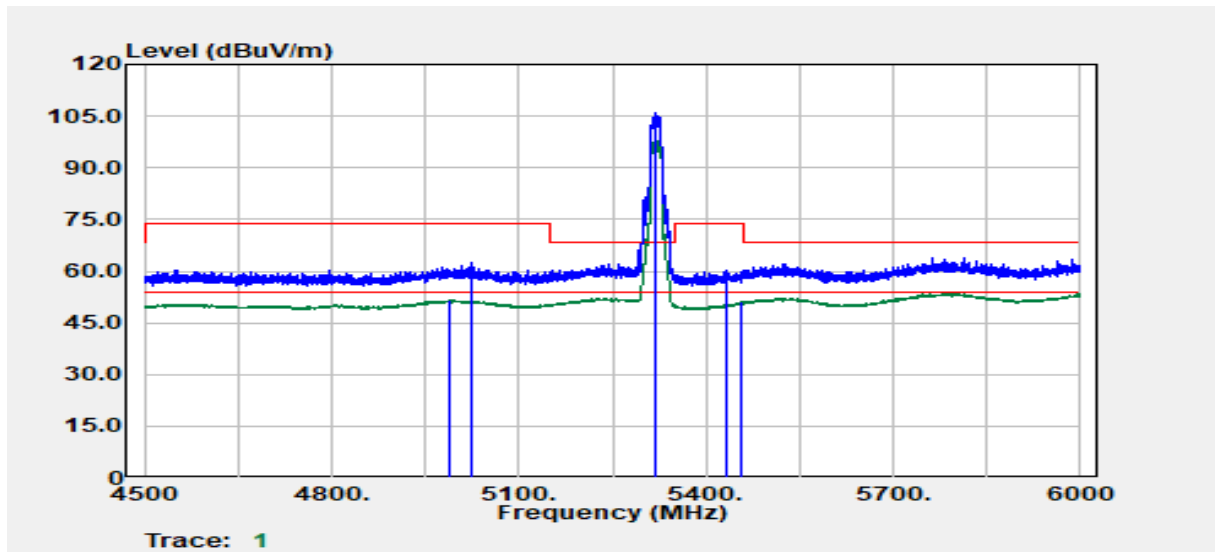


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4989.60	Average	40.08	11.52	51.60	54.00	-2.40
5023.80	Peak	50.57	11.77	62.34	74.00	-11.66
5320.00	Peak	93.86	12.14	106.01	--	--
5320.00	Average	86.73	12.14	98.87	--	--
5434.50	Peak	47.99	12.36	60.35	74.00	-13.65
5457.30	Average	38.57	12.40	50.97	54.00	-3.03

**Test Data for UNII-2a**


**(3) Chain 2**

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

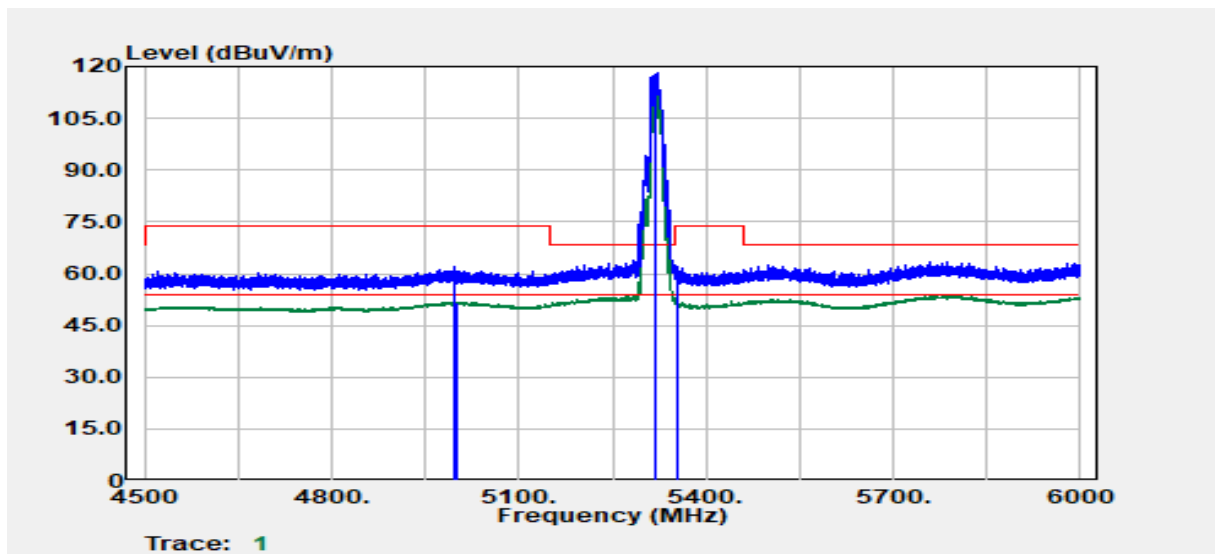

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4995.60	Peak	50.35	11.57	61.92	74.00	-12.08
4999.95	Average	40.14	11.61	51.75	54.00	-2.25
5320.00	Peak	105.83	12.14	117.97	--	--
5320.00	Average	99.56	12.14	111.70	--	--
5352.30	Average	40.74	12.14	52.88	54.00	-1.12
5353.50	Peak	50.07	12.14	62.21	74.00	-11.79

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

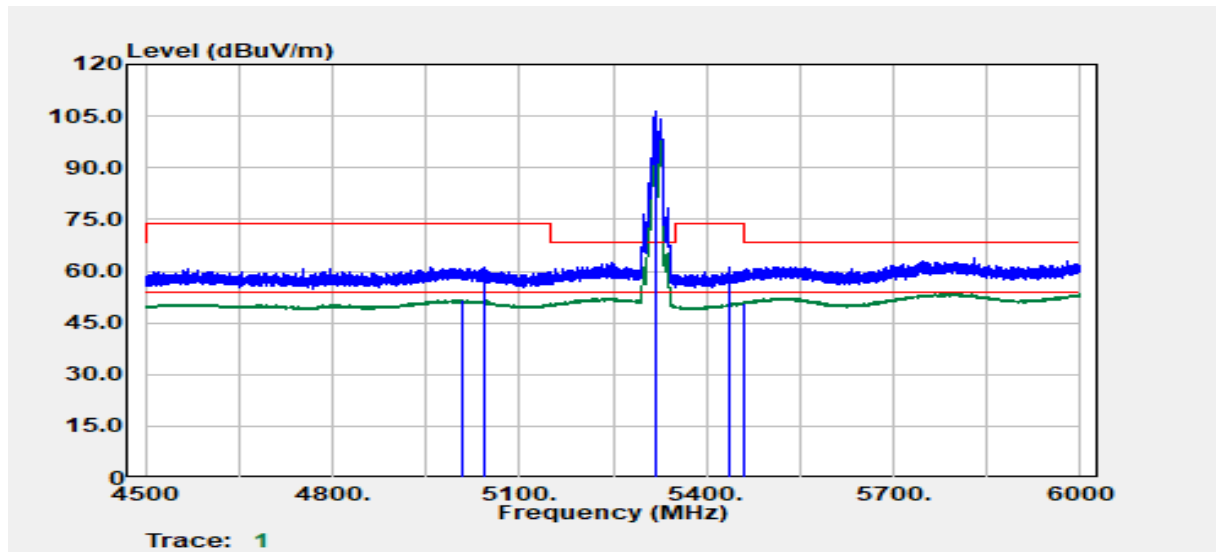


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5007.15	Average	39.81	11.66	51.47	54.00	-2.53
5043.00	Peak	49.33	11.90	61.23	74.00	-12.77
5320.00	Peak	94.43	12.14	106.58	--	--
5320.00	Average	87.64	12.14	99.78	--	--
5436.00	Peak	48.69	12.36	61.05	74.00	-12.95
5459.70	Average	38.45	12.41	50.86	54.00	-3.14



**Test Data for UNII-2a**


**(4) MIMO**

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

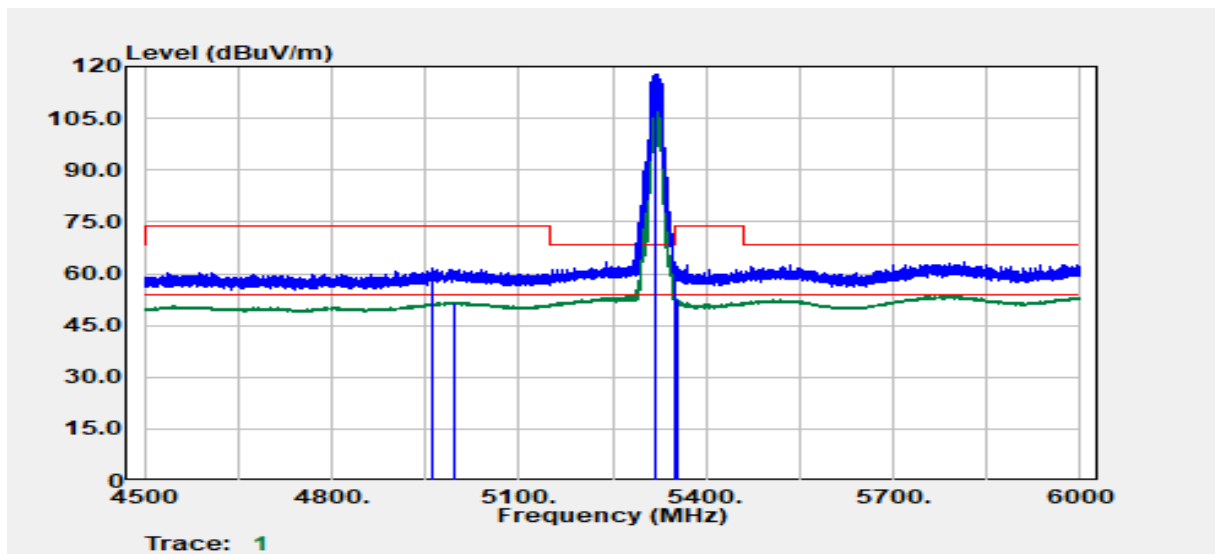


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4961.55	Peak	50.12	11.26	61.38	74.00	-12.62
4994.85	Average	40.09	11.56	51.66	54.00	-2.34
5320.00	Peak	105.81	12.14	117.95	--	--
5320.00	Average	99.51	12.14	111.65	--	--
5352.00	Peak	50.47	12.14	62.61	74.00	-11.39
5353.05	Average	40.41	12.14	52.55	54.00	-1.45

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

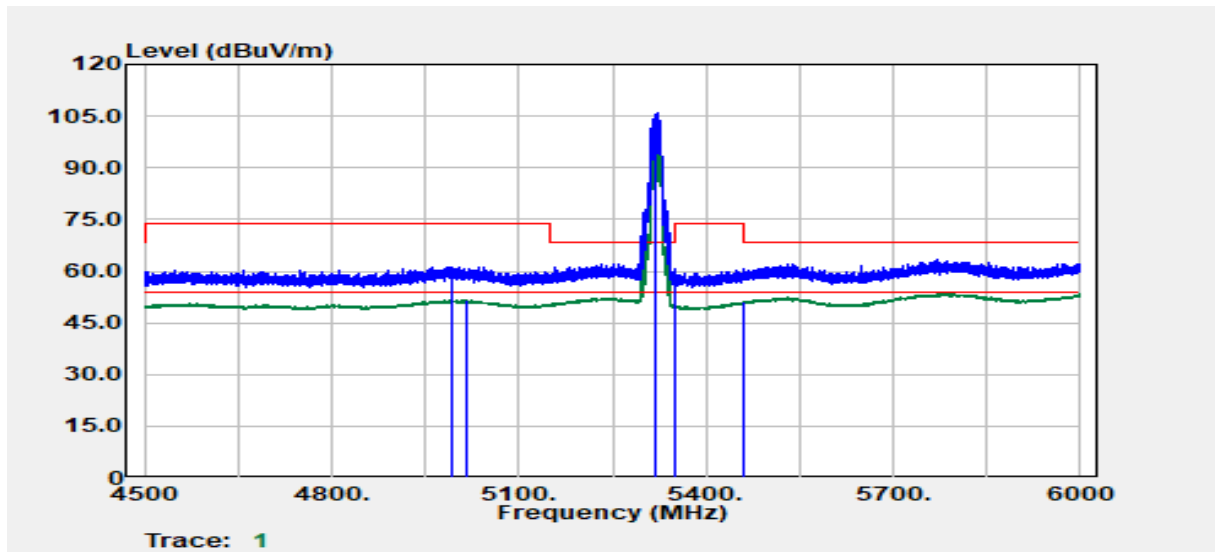


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4991.25	Peak	49.78	11.53	61.31	74.00	-12.69
5015.85	Average	39.86	11.72	51.57	54.00	-2.43
5320.00	Peak	93.88	12.14	106.02	--	--
5320.00	Average	86.42	12.14	98.56	--	--
5349.90	Peak	48.37	12.13	60.50	68.20	-7.70
5459.85	Average	38.59	12.41	51.00	54.00	-3.00

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

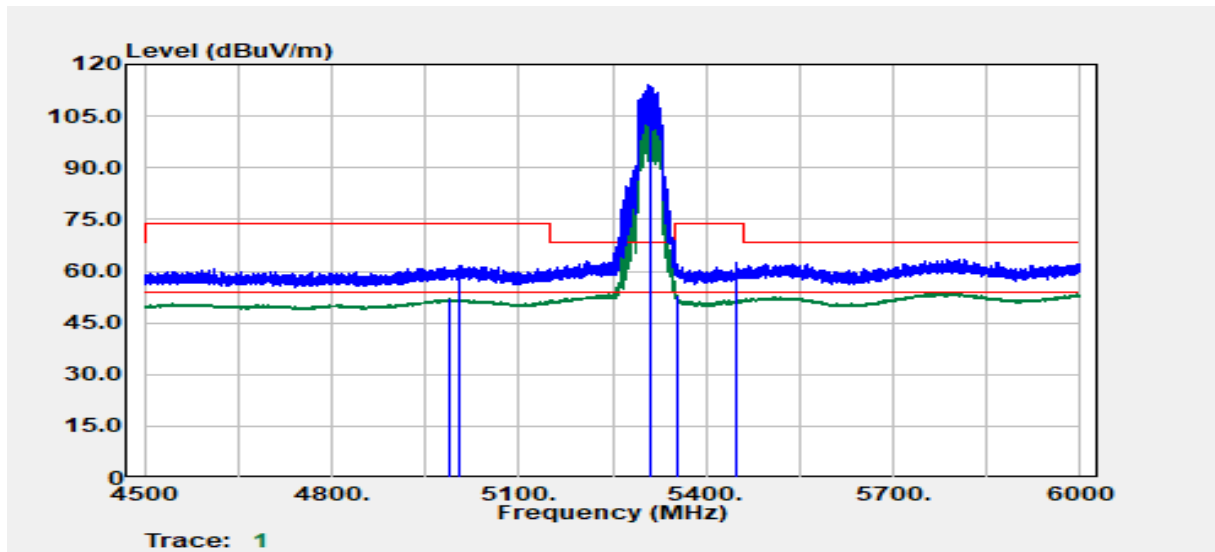


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4990.20	Average	40.58	11.52	52.10	54.00	-1.90
5005.50	Peak	49.81	11.65	61.46	74.00	-12.54
5310.00	Peak	101.90	12.15	114.05	--	--
5310.00	Average	94.78	12.15	106.93	--	--
5352.90	Average	40.90	12.14	53.04	54.00	-0.96
5449.20	Peak	50.12	12.37	62.49	74.00	-11.51

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

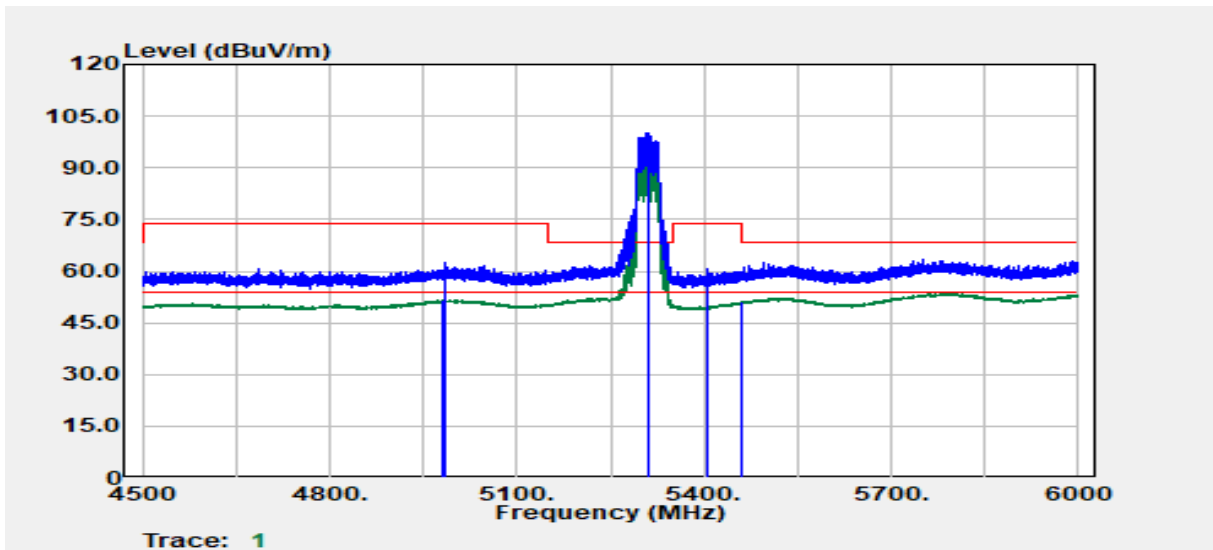


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4981.05	Average	40.09	11.44	51.53	54.00	-2.47
4986.15	Peak	50.80	11.48	62.28	74.00	-11.72
5310.00	Peak	87.84	12.15	99.99	--	--
5310.00	Average	81.74	12.15	93.89	--	--
5404.65	Peak	48.33	12.33	60.65	74.00	-13.35
5459.85	Average	38.63	12.41	51.04	54.00	-2.96

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

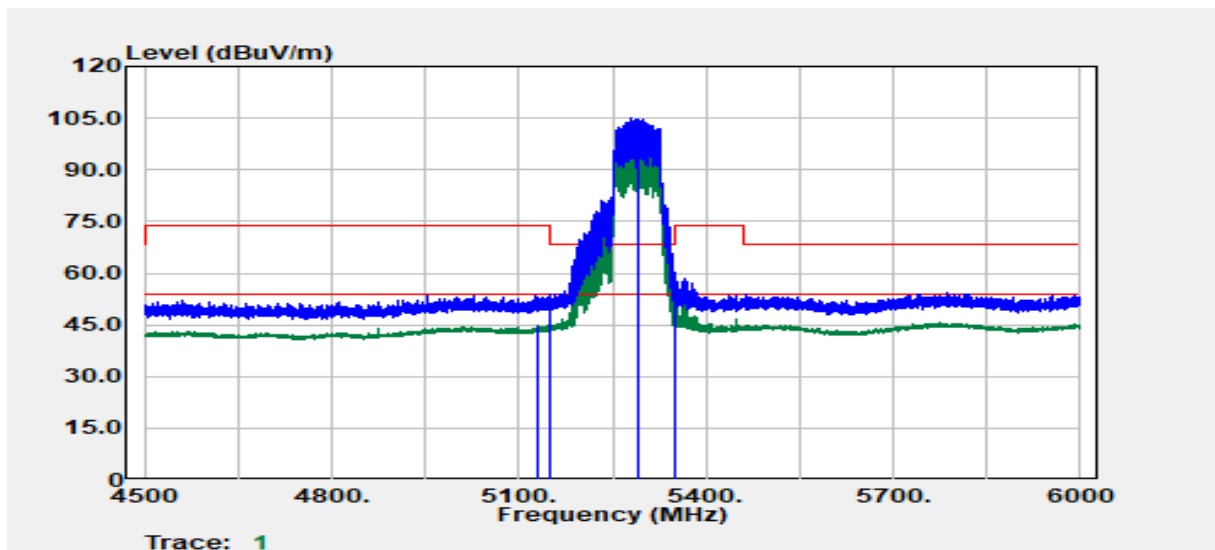


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5130.15	Average	32.66	12.12	44.78	54.00	-9.22
5149.95	Peak	41.51	12.16	53.67	74.00	-20.33
5290.00	Peak	92.79	12.13	104.92	--	--
5290.00	Average	87.17	12.13	99.30	--	--
5350.80	Peak	47.92	12.13	60.05	74.00	-13.95
5350.95	Average	41.41	12.13	53.54	54.00	-0.46

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

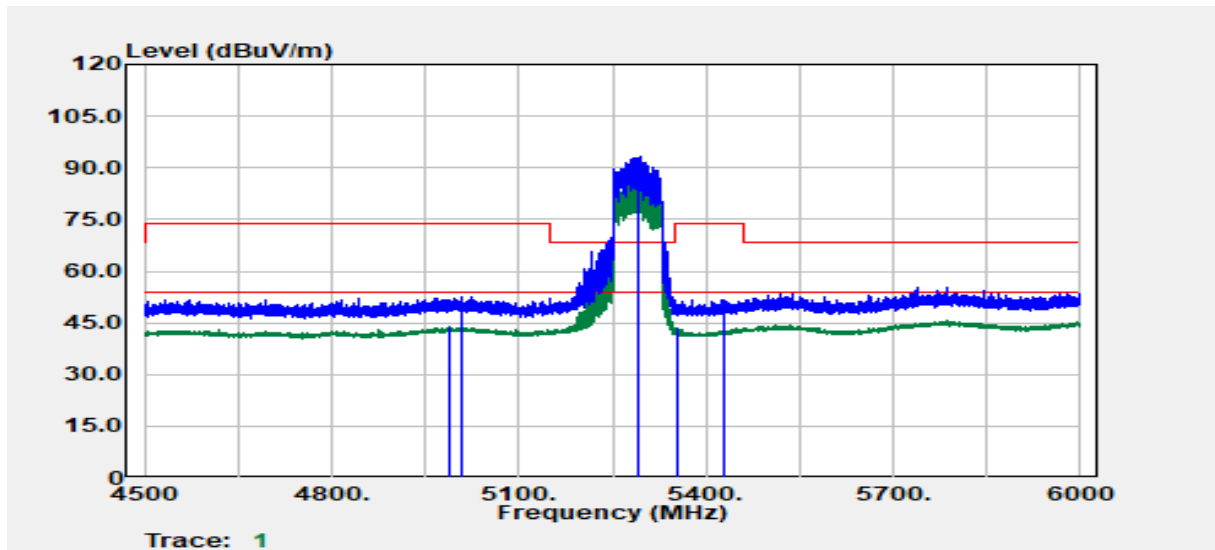


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4986.75	Average	32.22	11.49	43.71	54.00	-10.29
5009.70	Peak	40.76	11.68	52.43	74.00	-21.57
5290.00	Peak	81.04	12.13	93.17	--	--
5290.00	Average	74.94	12.13	87.06	--	--
5353.80	Average	31.26	12.14	43.41	54.00	-10.59
5430.45	Peak	39.38	12.35	51.74	74.00	-22.26

Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

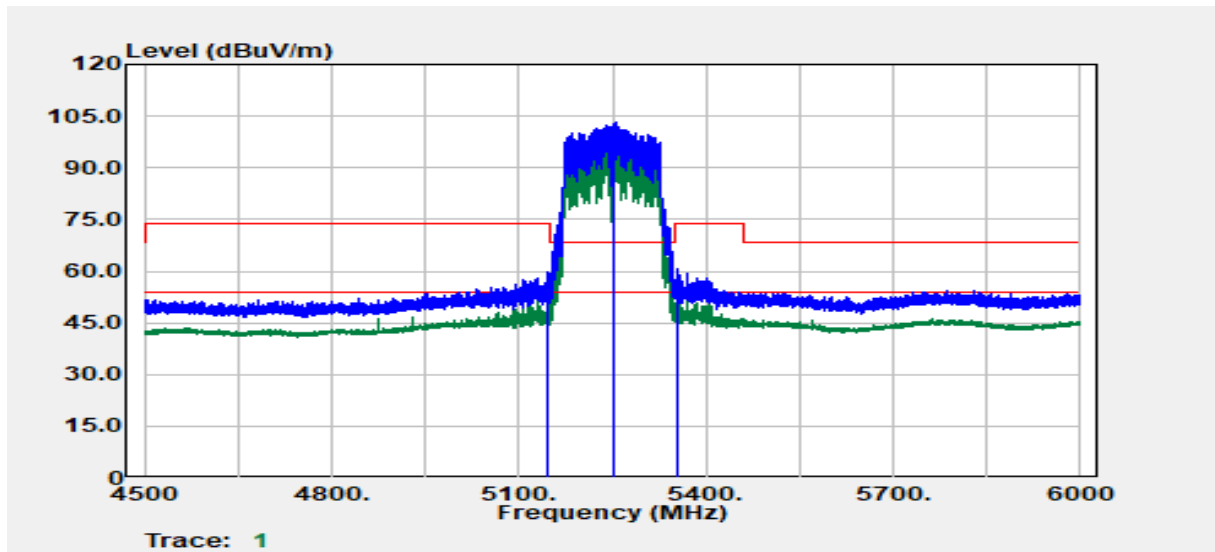

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5145.45	Peak	47.62	12.15	59.77	74.00	-14.23
5145.45	Average	40.79	12.15	52.94	54.00	-1.06
5250.00	Peak	91.06	12.04	103.10	--	--
5250.00	Average	84.31	12.04	96.35	--	--
5355.15	Average	40.84	12.15	52.99	54.00	-1.01
5355.30	Peak	48.43	12.15	60.58	74.00	-13.42


Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

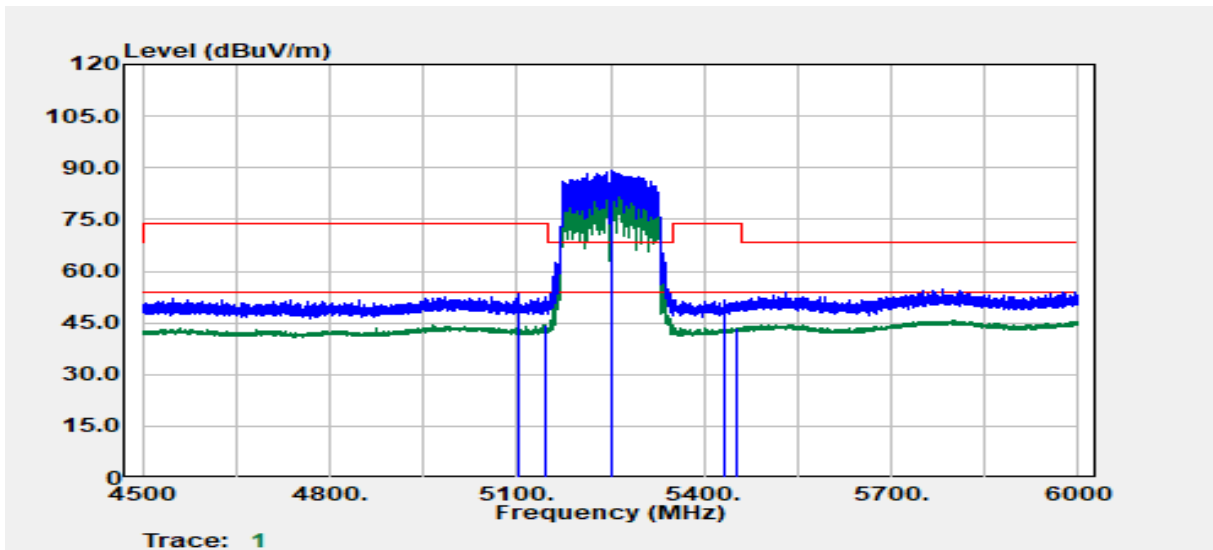

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5103.45	Peak	41.31	12.06	53.37	74.00	-20.63
5144.10	Average	32.23	12.15	44.37	54.00	-9.63
5250.00	Peak	77.24	12.04	89.28	--	--
5250.00	Average	71.25	12.04	83.29	--	--
5432.25	Peak	39.10	12.36	51.46	74.00	-22.54
5452.65	Average	31.07	12.38	43.45	54.00	-10.55




Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

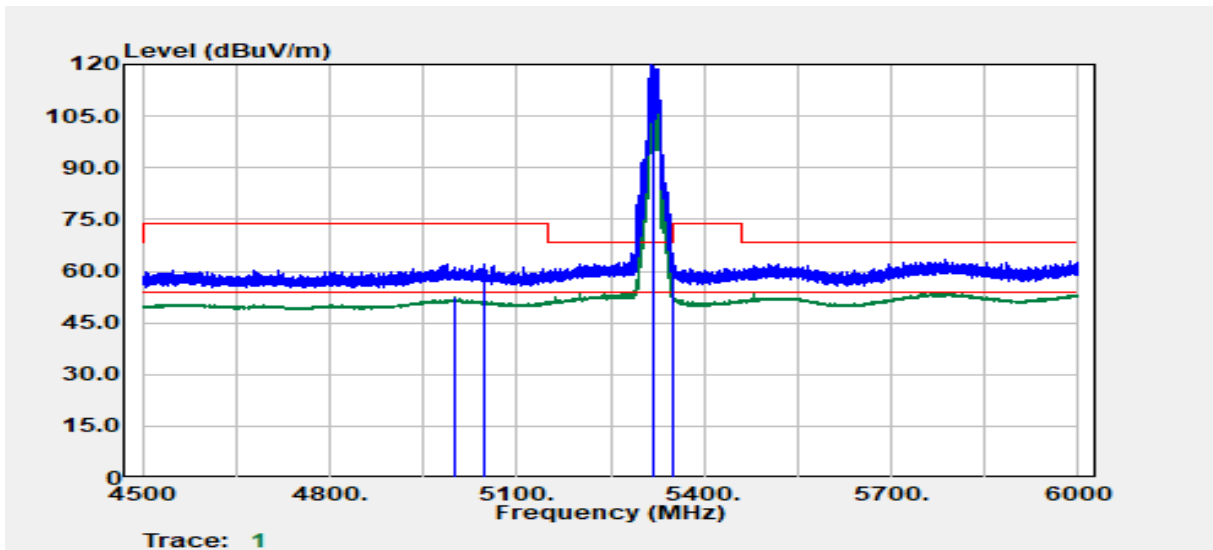


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5000.10	Average	40.75	11.61	52.36	54.00	-1.64
5047.20	Peak	50.03	11.93	61.96	74.00	-12.04
5320.00	Peak	107.64	12.14	119.78	--	--
5320.00	Average	98.73	12.14	110.87	--	--
5350.05	Average	41.08	12.13	53.21	54.00	-0.79
5350.20	Peak	51.19	12.13	63.32	74.00	-10.68

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	24.6°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

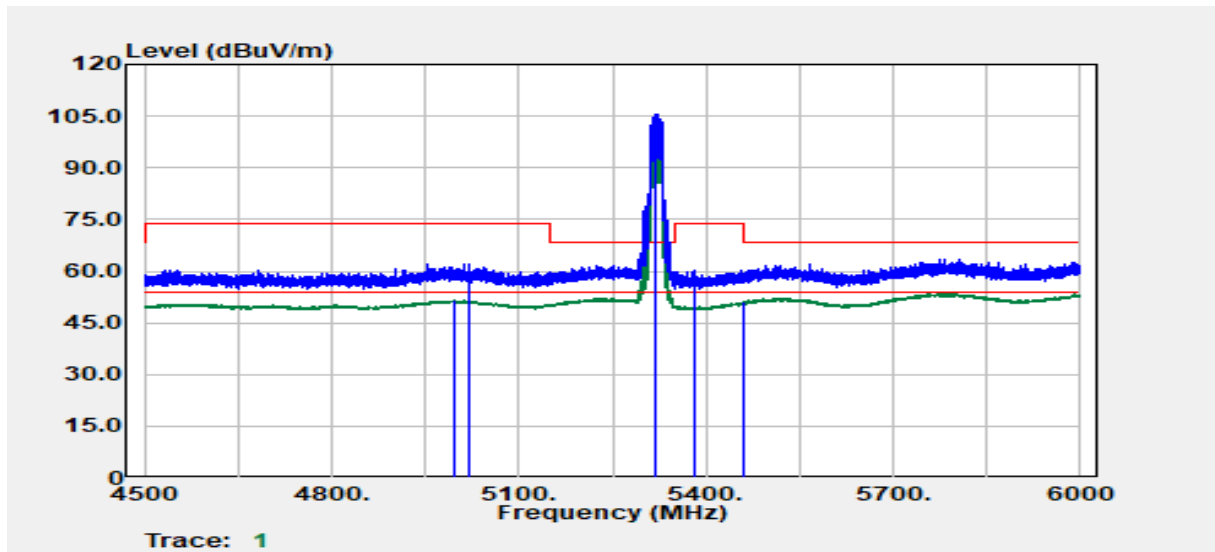


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4995.30	Average	39.86	11.57	51.43	54.00	-2.57
5022.00	Peak	50.48	11.76	62.24	74.00	-11.76
5320.00	Peak	93.38	12.14	105.52	--	--
5320.00	Average	85.38	12.14	97.52	--	--
5382.60	Peak	48.20	12.25	60.45	74.00	-13.55
5458.65	Average	38.61	12.41	51.01	54.00	-2.99

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

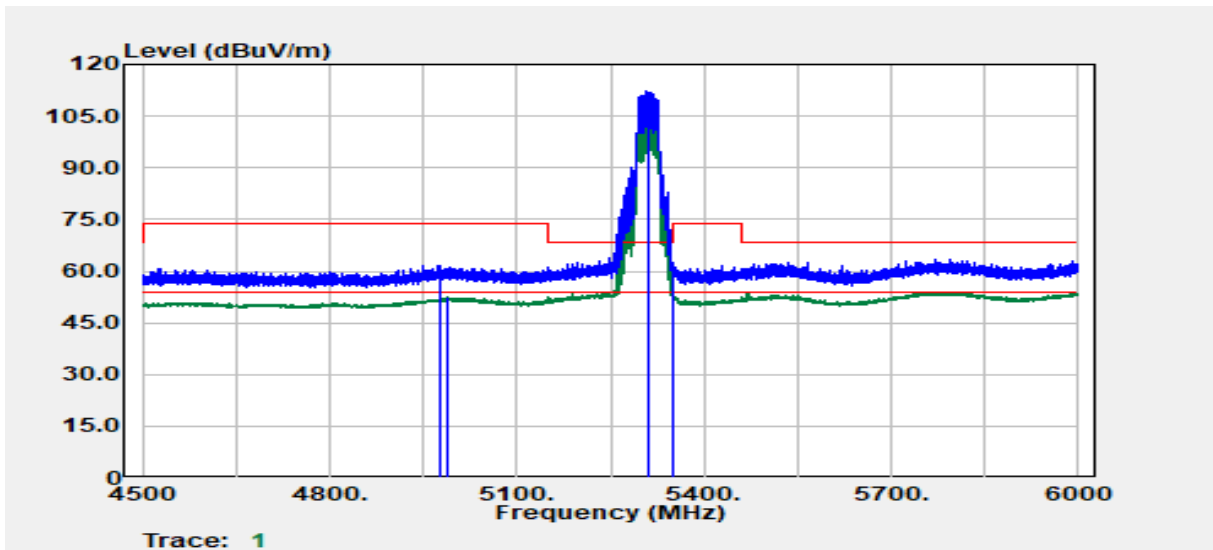


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4978.80	Peak	50.06	11.42	61.48	74.00	-12.52
4990.05	Average	41.15	11.52	52.66	54.00	-1.34
5310.00	Peak	100.02	12.15	112.16	--	--
5310.00	Average	93.43	12.15	105.58	--	--
5350.05	Peak	50.27	12.13	62.40	74.00	-11.60
5350.80	Average	41.22	12.13	53.35	54.00	-0.65

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

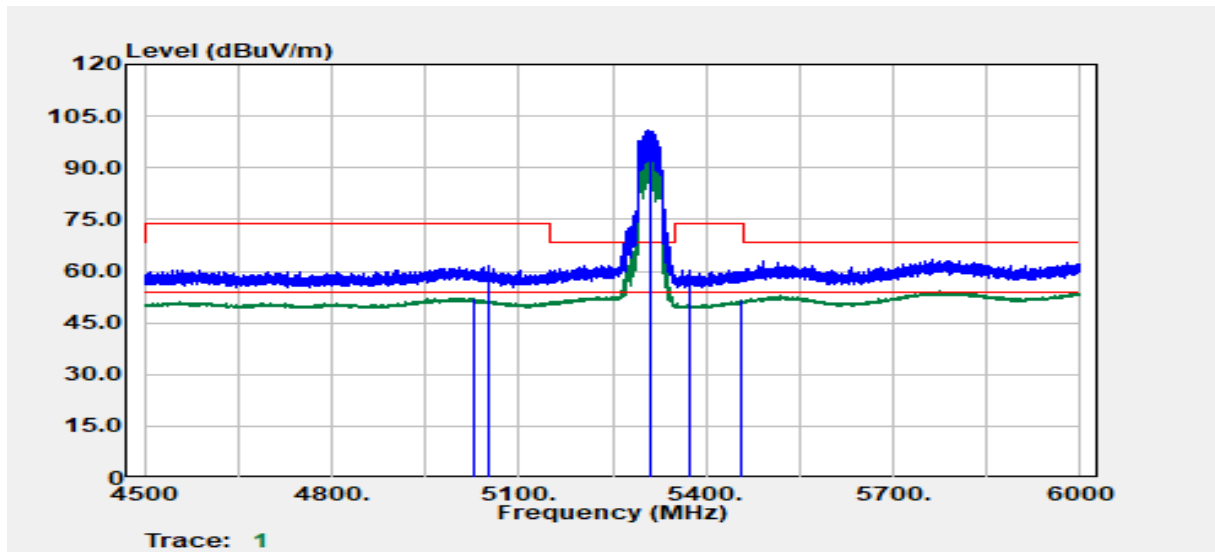


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5029.05	Average	40.37	11.81	52.18	54.00	-1.82
5050.05	Peak	49.56	11.95	61.51	74.00	-12.49
5310.00	Peak	88.65	12.15	100.79	--	--
5310.00	Average	82.51	12.15	94.65	--	--
5373.60	Peak	47.86	12.22	60.08	74.00	-13.92
5457.75	Average	39.08	12.40	51.48	54.00	-2.52

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

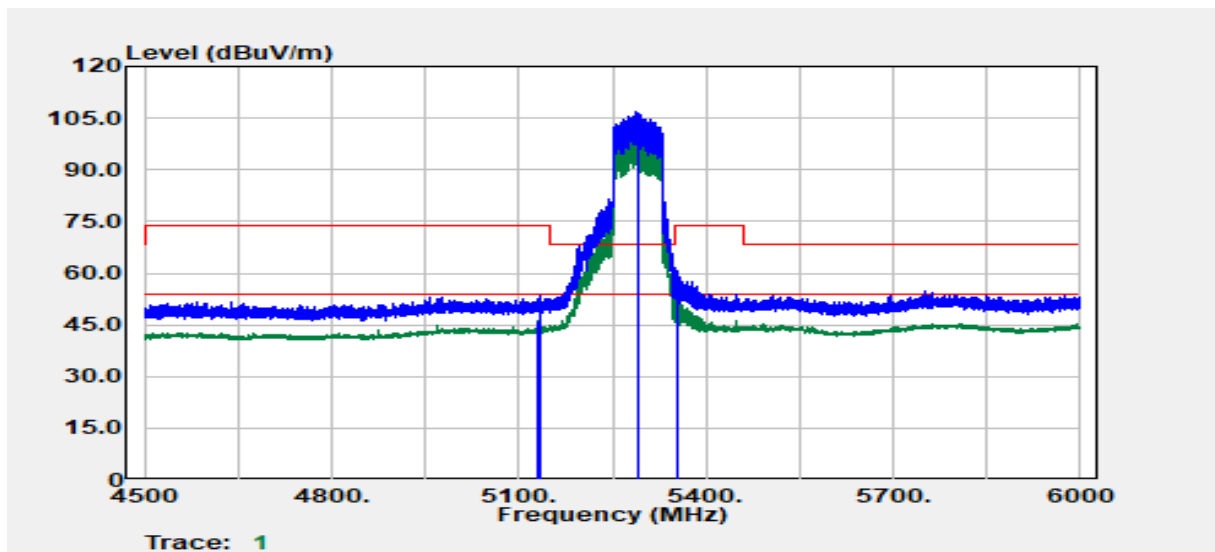


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5129.85	Average	34.03	12.12	46.14	54.00	-7.86
5134.35	Peak	41.49	12.13	53.62	74.00	-20.38
5290.00	Peak	94.76	12.13	106.89	--	--
5290.00	Average	87.54	12.13	99.67	--	--
5353.95	Peak	48.36	12.15	60.50	74.00	-13.50
5354.25	Average	41.38	12.15	53.53	54.00	-0.47

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

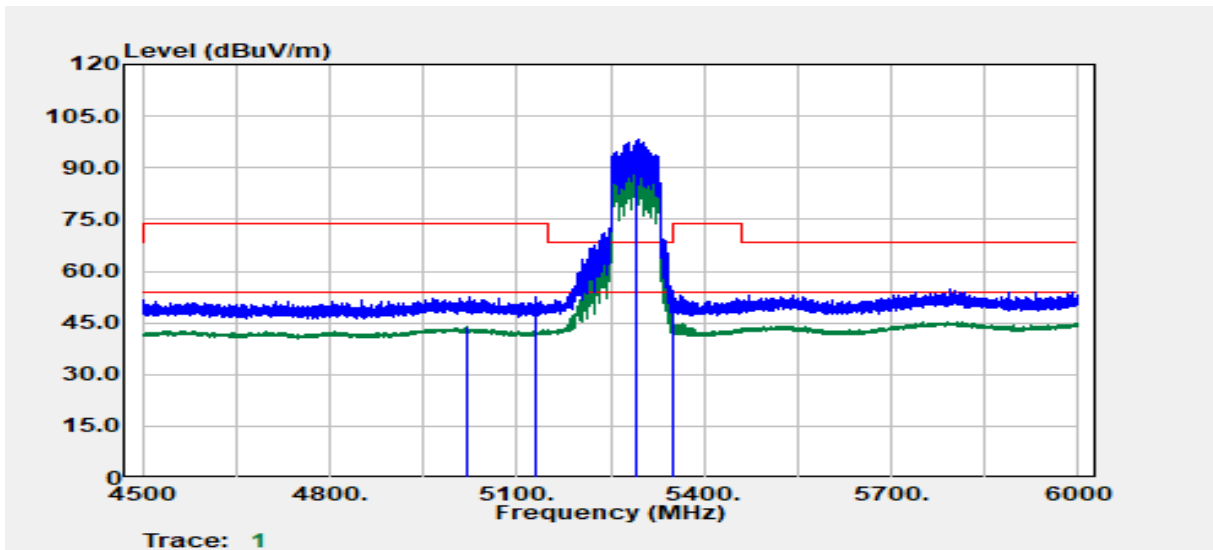


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5019.30	Average	32.14	11.74	43.89	54.00	-10.11
5128.80	Peak	40.42	12.11	52.53	74.00	-21.47
5290.00	Peak	86.08	12.13	98.20	--	--
5290.00	Average	77.58	12.13	89.71	--	--
5351.10	Average	33.80	12.13	45.94	54.00	-8.06
5352.00	Peak	42.32	12.14	54.46	74.00	-19.54

Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

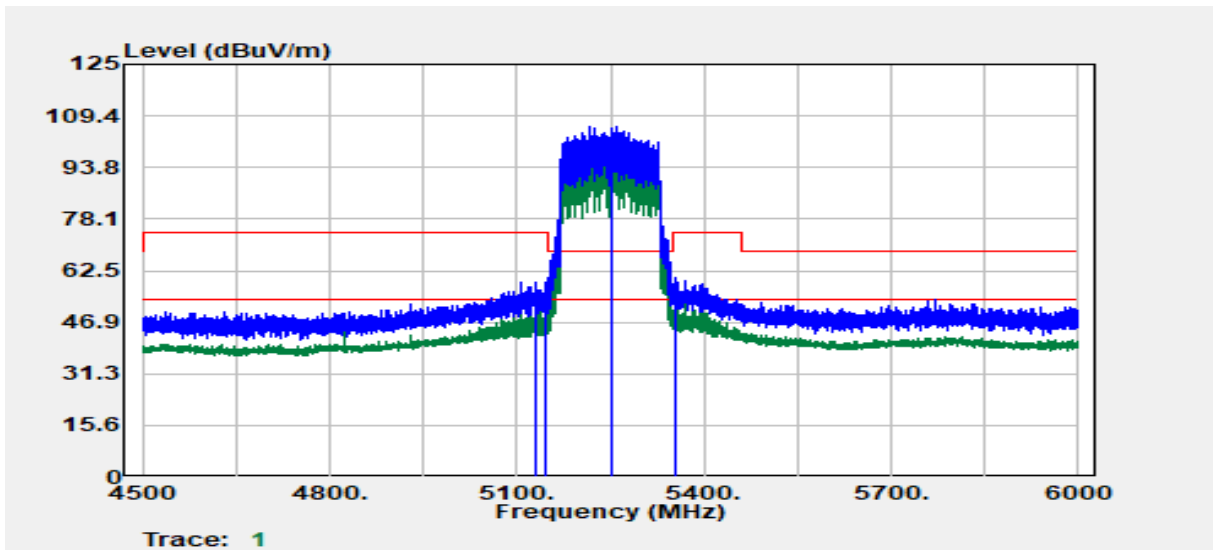

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5130.68	Peak	46.78	12.12	58.89	74.00	-15.11
5145.29	Average	39.21	12.15	51.36	54.00	-2.64
5250.00	Peak	94.01	12.04	106.05	--	--
5250.00	Average	85.56	12.04	97.60	--	--
5355.51	Average	41.26	12.15	53.41	54.00	-0.59
5355.71	Peak	48.39	12.15	60.55	74.00	-13.45

Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

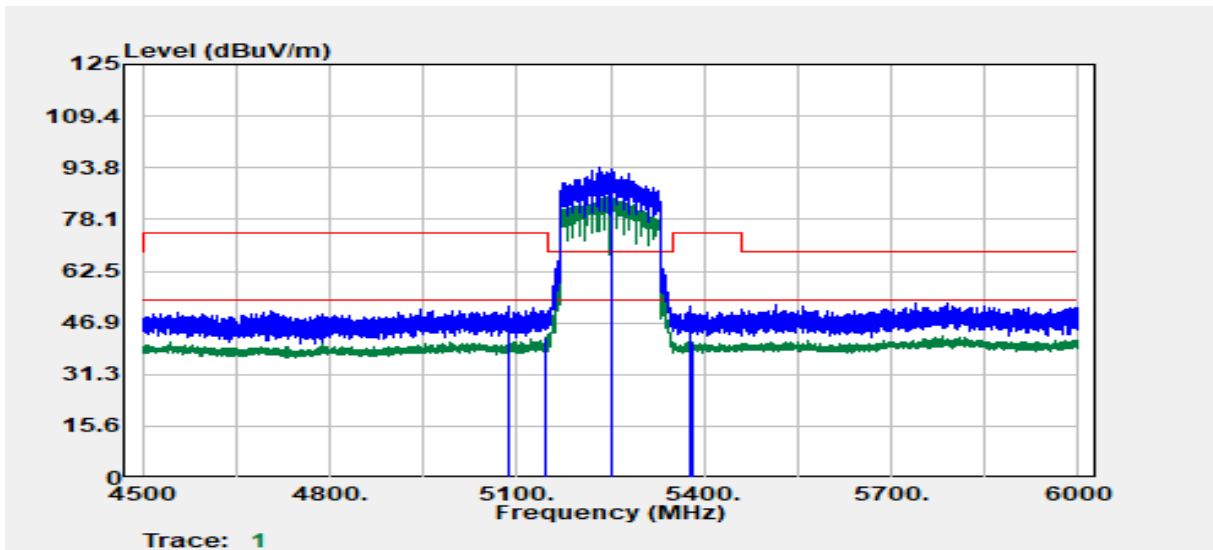


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5087.40	Peak	39.92	12.02	51.94	74.00	-22.06
5147.10	Average	30.19	12.15	42.35	54.00	-11.65
5250.00	Peak	81.69	12.04	93.73	--	--
5250.00	Average	72.69	12.04	84.73	--	--
5377.95	Peak	39.44	12.24	51.68	74.00	-22.32
5379.90	Average	28.69	12.24	40.94	54.00	-13.06



**Test Data for UNII-2c**


**(1) Chain 0**

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

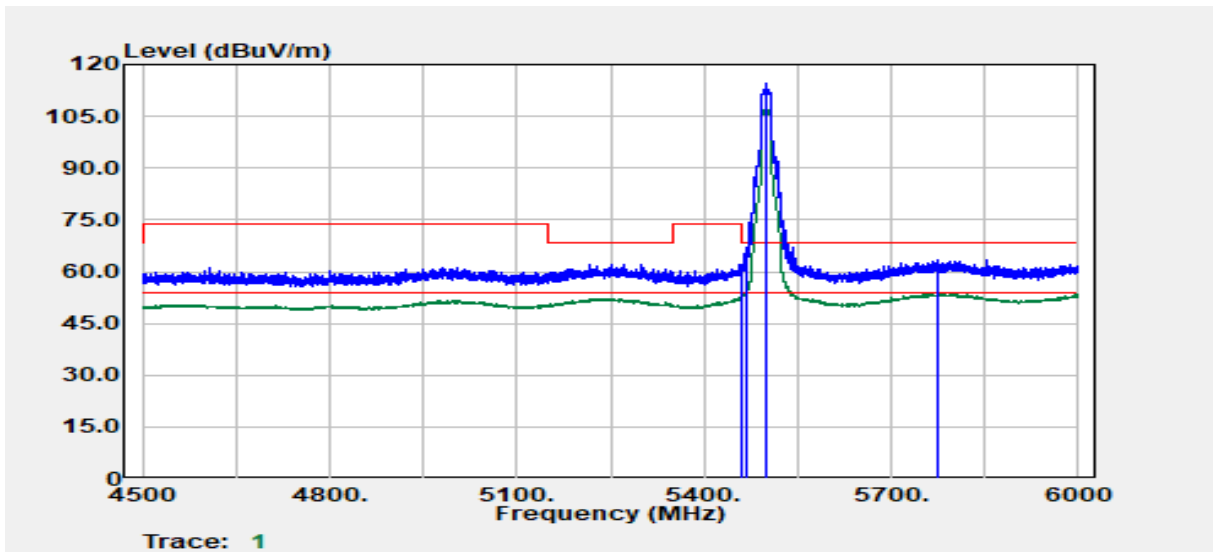


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5460.00	Peak	49.70	12.41	62.11	74.00	-11.89
5460.00	Average	40.27	12.41	52.68	54.00	-1.32
5468.40	Peak	54.65	12.44	67.09	68.20	-1.11
5500.00	Peak	101.90	12.55	114.45	--	--
5500.00	Average	94.65	12.55	107.20	--	--
5774.70	Peak	49.35	13.99	63.34	68.20	-4.86

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

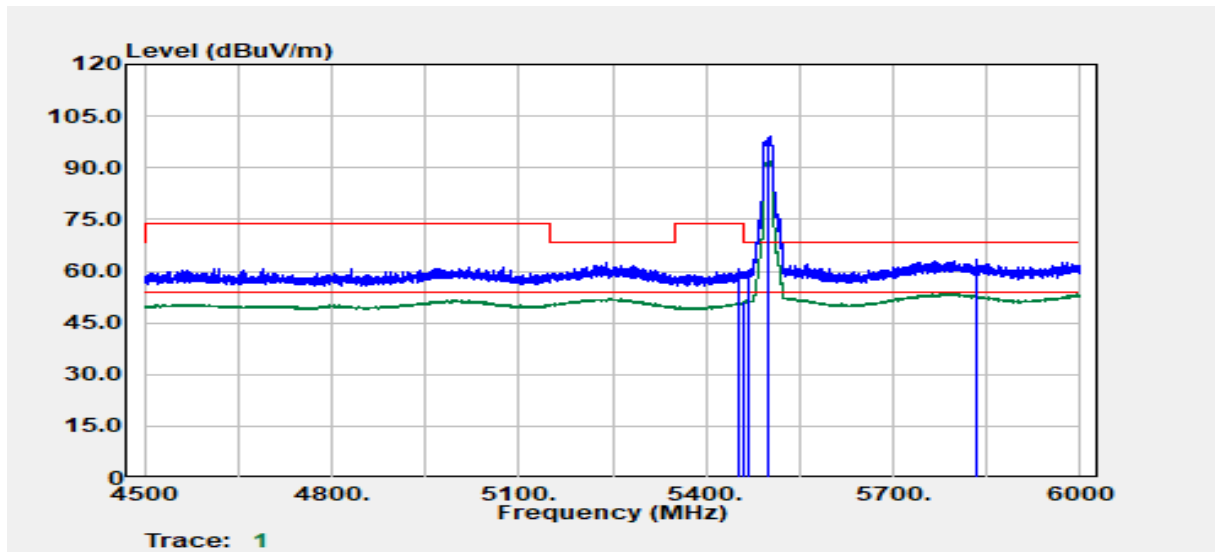


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.30	Peak	48.20	12.39	60.59	74.00	-13.41
5458.50	Average	38.55	12.40	50.96	54.00	-3.04
5467.20	Peak	47.62	12.44	60.05	68.20	-8.15
5500.00	Peak	86.43	12.55	98.98	--	--
5500.00	Average	79.45	12.55	92.00	--	--
5835.00	Peak	49.17	14.06	63.23	68.20	-4.97

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

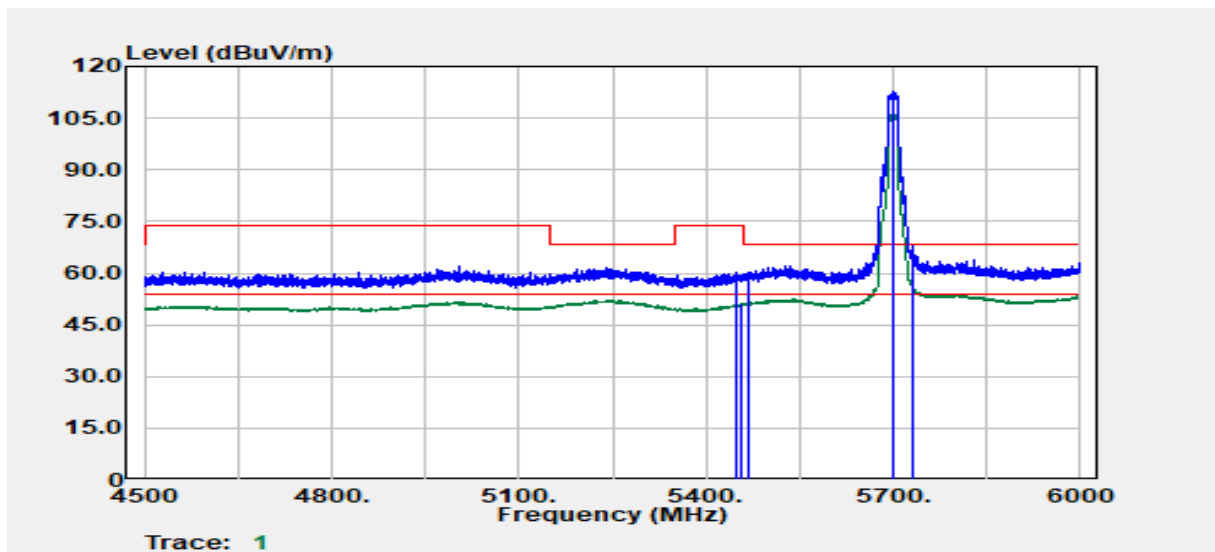

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5448.00	Peak	47.99	12.37	60.37	74.00	-13.63
5457.90	Average	38.66	12.40	51.06	54.00	-2.94
5469.60	Peak	47.76	12.44	60.20	68.20	-8.00
5700.00	Peak	99.10	13.56	112.66	--	--
5700.00	Average	92.62	13.56	106.18	--	--
5730.00	Peak	54.18	13.72	67.90	68.20	-0.30

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

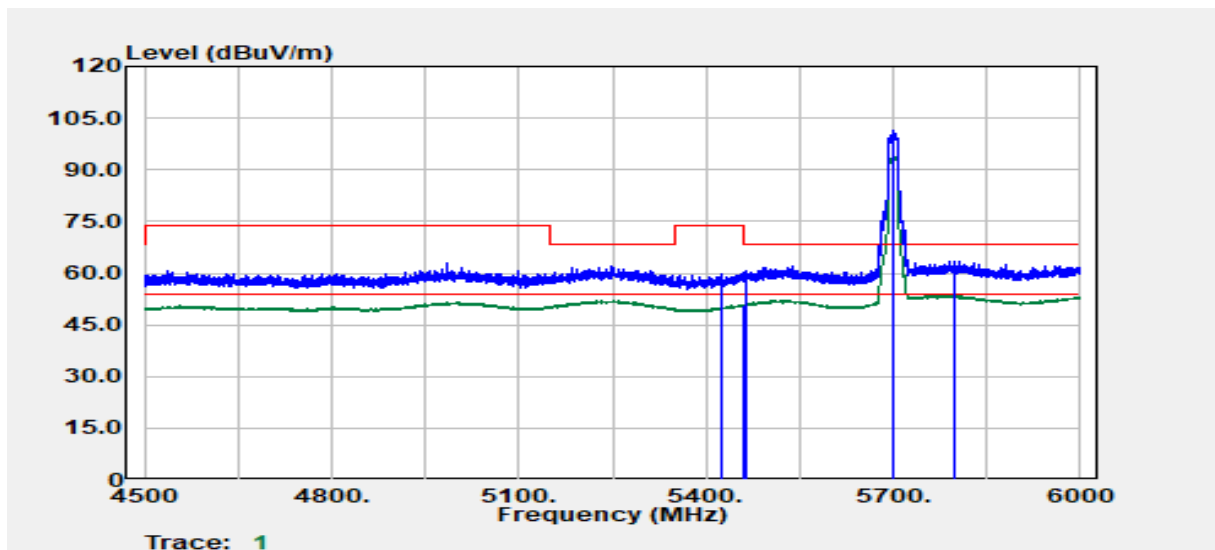


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5424.60	Peak	47.43	12.35	59.77	74.00	-14.23
5459.70	Average	38.43	12.41	50.84	54.00	-3.16
5465.40	Peak	48.12	12.43	60.55	68.20	-7.65
5700.00	Peak	87.76	13.56	101.32	--	--
5700.00	Average	80.34	13.56	93.90	--	--
5799.90	Peak	49.25	14.16	63.41	68.20	-4.79

**Test Data for UNII-2c**


**(2) Chain 1**

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

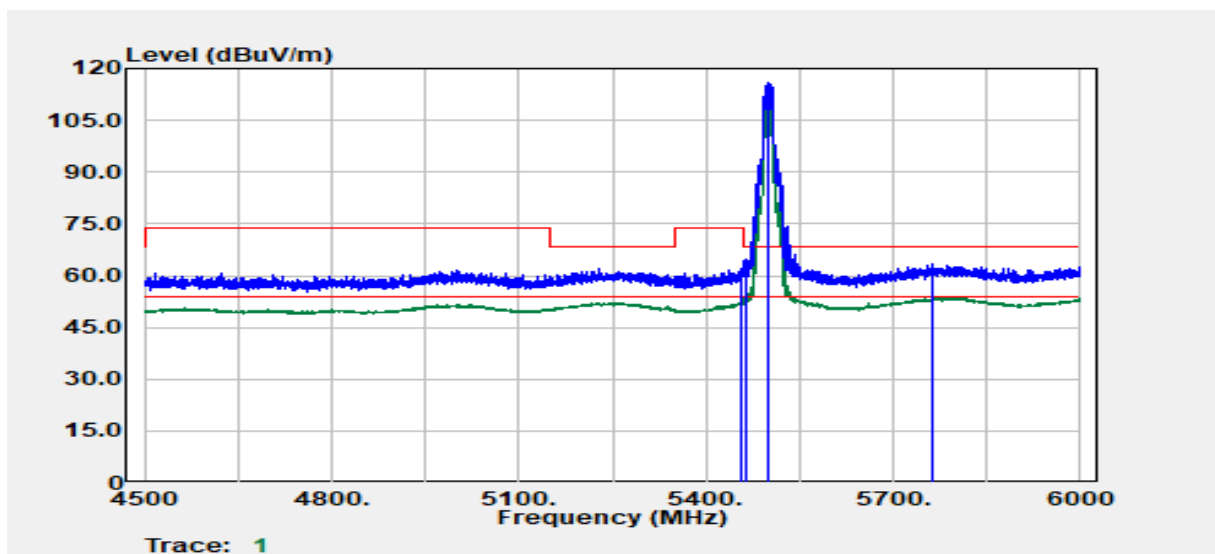


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5454.90	Peak	49.68	12.39	62.07	74.00	-11.93
5457.00	Average	40.15	12.40	52.55	54.00	-1.45
5465.40	Peak	52.51	12.43	64.94	68.20	-3.26
5500.00	Peak	103.56	12.55	116.11	--	--
5500.00	Average	97.12	12.55	109.67	--	--
5762.40	Peak	49.55	13.90	63.46	68.20	-4.74

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

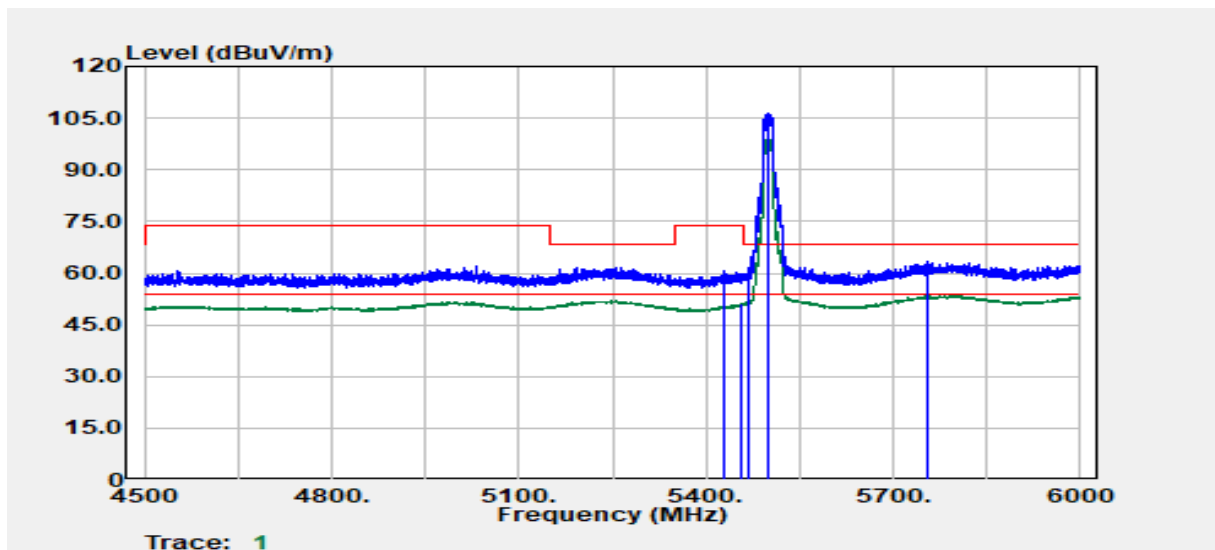


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5429.10	Peak	48.41	12.35	60.77	74.00	-13.23
5457.00	Average	38.83	12.40	51.23	54.00	-2.77
5467.50	Peak	48.97	12.44	61.41	68.20	-6.79
5500.00	Peak	93.77	12.55	106.32	--	--
5500.00	Average	87.21	12.55	99.76	--	--
5754.00	Peak	49.33	13.85	63.18	68.20	-5.02

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

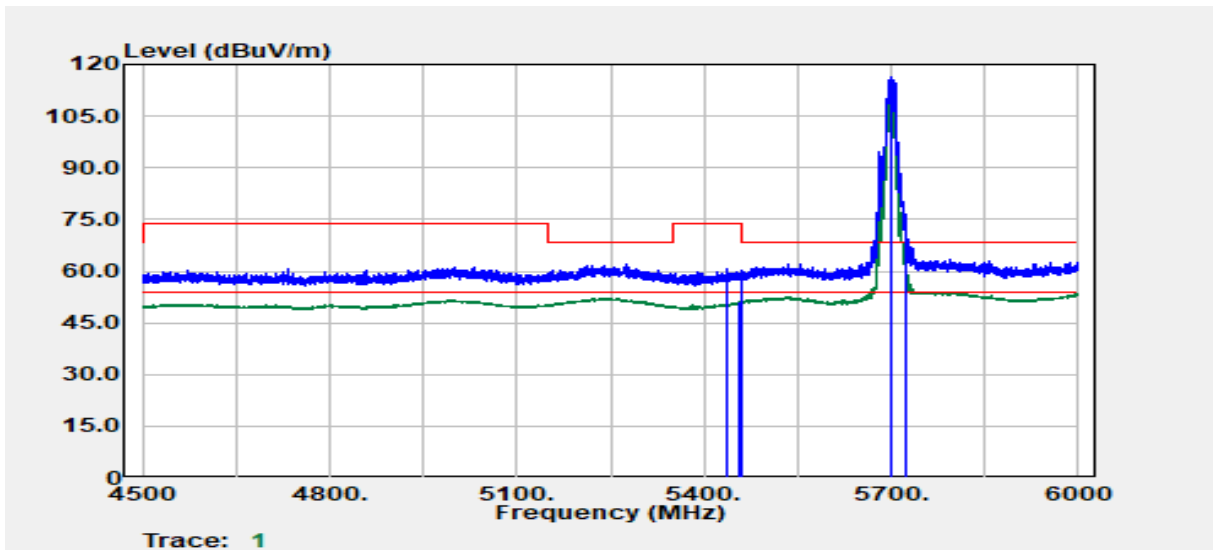

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5437.80	Peak	48.24	12.36	60.60	74.00	-13.40
5457.60	Average	38.59	12.40	50.99	54.00	-3.01
5460.30	Peak	47.78	12.41	60.20	68.20	-8.00
5700.00	Peak	102.96	13.56	116.52	--	--
5700.00	Average	96.38	13.56	109.94	--	--
5725.20	Peak	53.91	13.69	67.60	68.20	-0.60

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

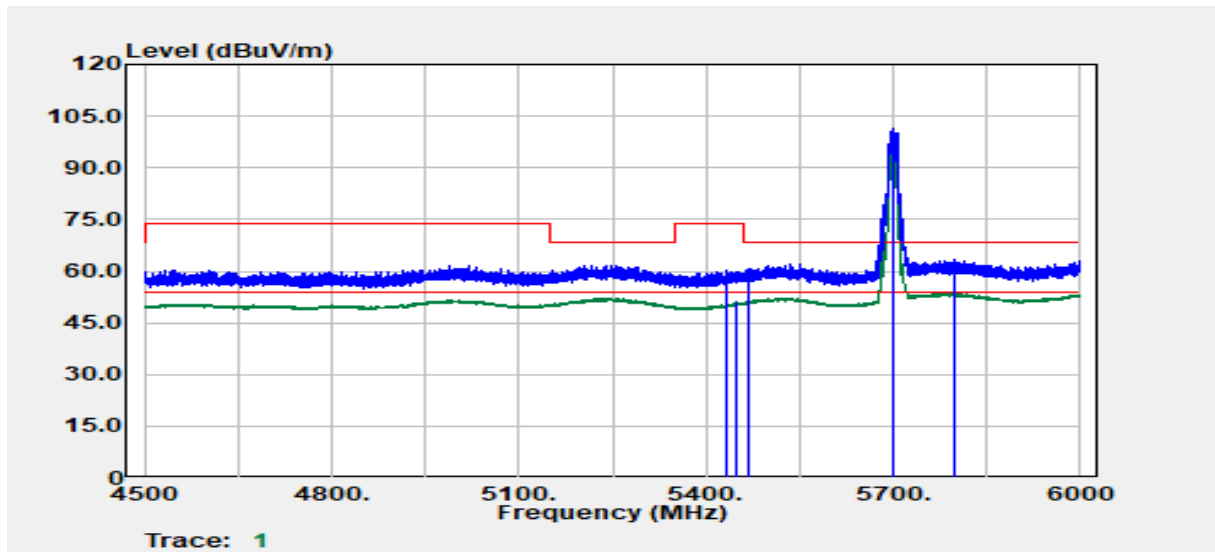


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5432.10	Peak	47.69	12.36	60.05	74.00	-13.95
5450.10	Average	38.64	12.38	51.02	54.00	-2.98
5466.75	Peak	48.15	12.43	60.58	68.20	-7.62
5700.00	Peak	88.04	13.56	101.60	--	--
5700.00	Average	81.48	13.56	95.04	--	--
5799.75	Peak	49.37	14.16	63.52	68.20	-4.68



**Test Data for UNII-2c**


**(3) Chain 2**

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

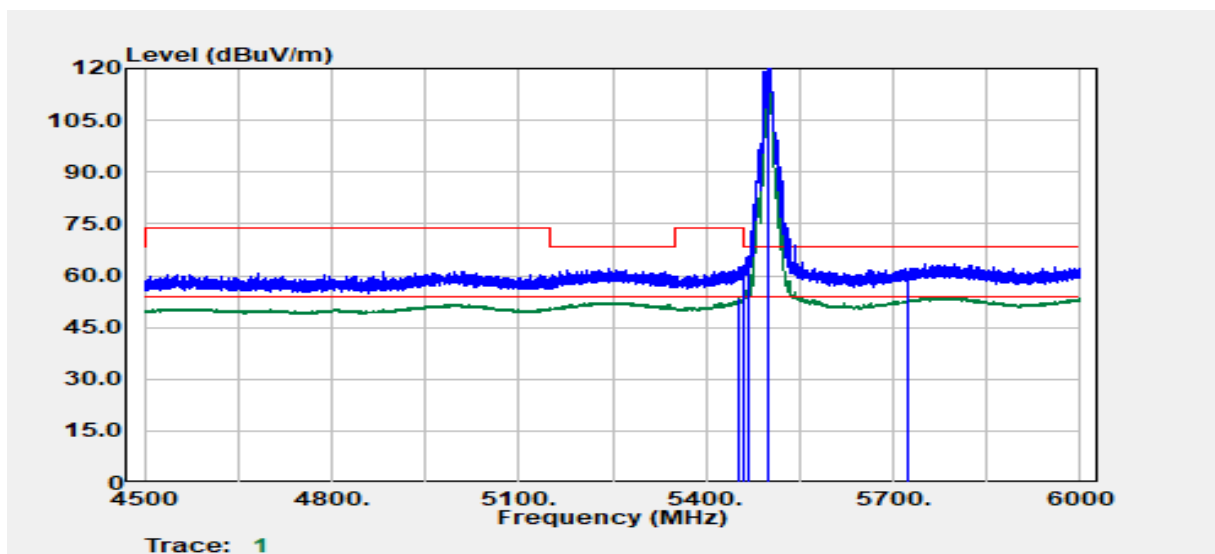


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5454.00	Average	41.07	12.39	53.46	54.00	-0.54
5458.65	Peak	50.22	12.41	62.63	74.00	-11.37
5467.05	Peak	53.25	12.43	65.68	68.20	-2.52
5500.00	Peak	108.18	12.55	120.73	--	--
5500.00	Average	100.97	12.55	113.52	--	--
5725.00	Peak	46.71	13.69	60.40	68.20	-7.80

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

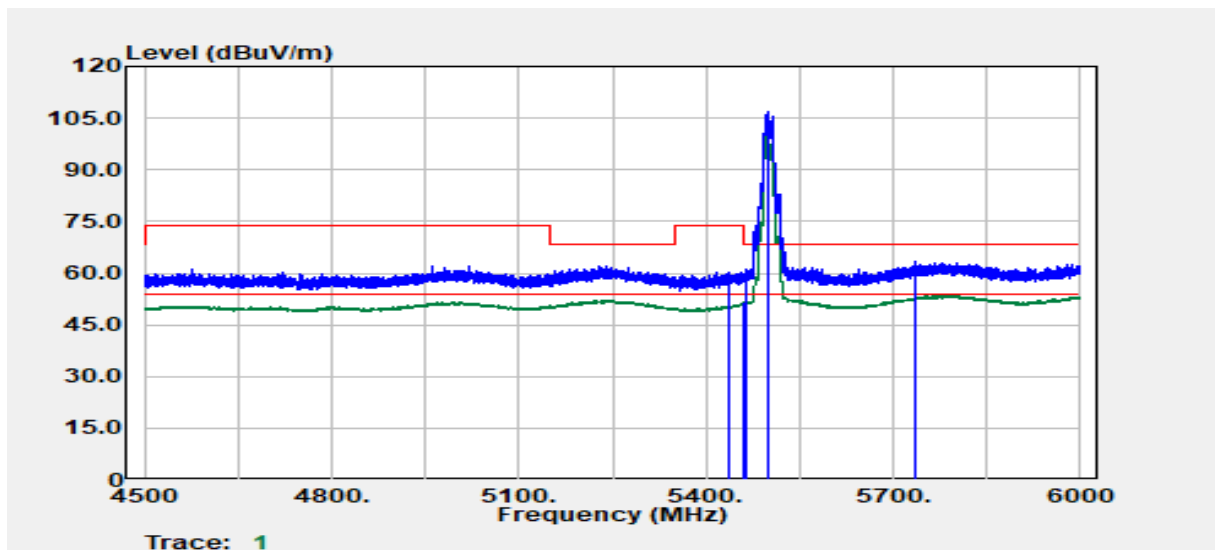


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5437.50	Peak	47.96	12.36	60.32	74.00	-13.68
5460.00	Average	39.00	12.41	51.41	54.00	-2.59
5463.15	Peak	48.66	12.42	61.08	68.20	-7.12
5500.00	Peak	94.22	12.55	106.77	--	--
5500.00	Average	87.84	12.55	100.39	--	--
5734.20	Peak	49.48	13.74	63.22	68.20	-4.98

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

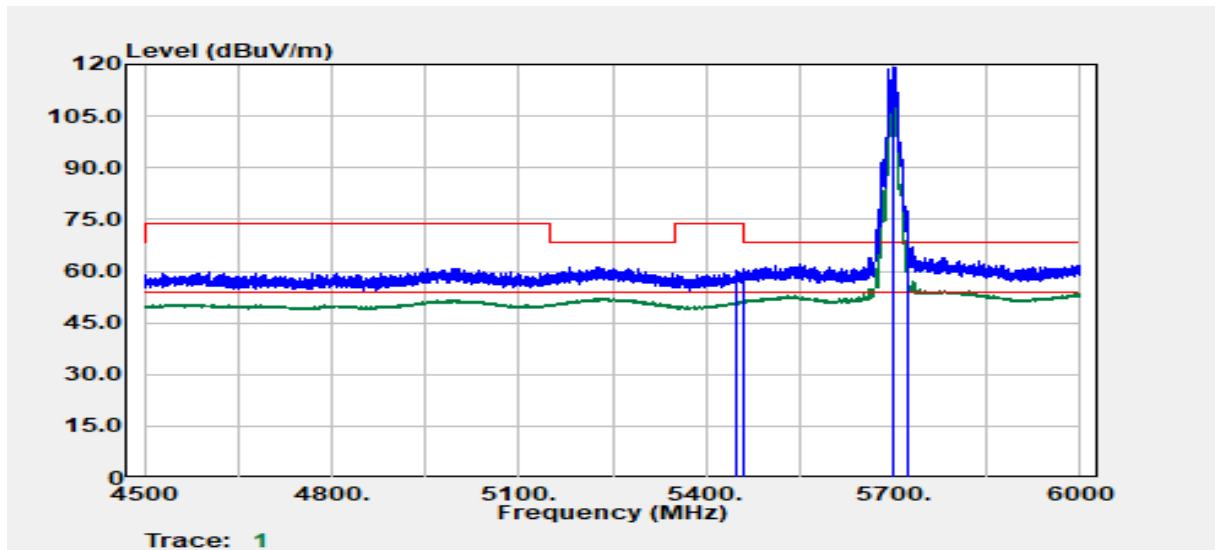

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5448.00	Peak	47.89	12.37	60.26	74.00	-13.74
5458.80	Average	38.94	12.41	51.34	54.00	-2.66
5461.50	Peak	48.08	12.42	60.49	68.20	-7.71
5700.00	Peak	105.72	13.56	119.28	--	--
5700.00	Average	99.50	13.56	113.06	--	--
5725.00	Peak	53.47	13.69	67.16	68.20	-1.04

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

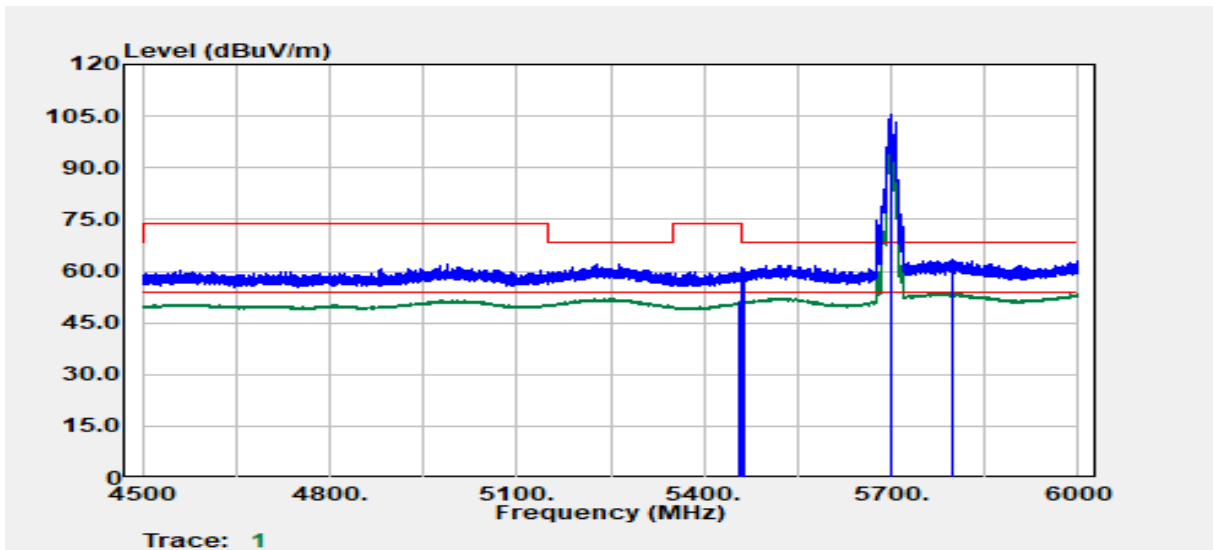


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.90	Average	38.63	12.40	51.03	54.00	-2.97
5458.50	Peak	48.63	12.40	61.03	74.00	-12.97
5463.00	Peak	48.42	12.42	60.84	68.20	-7.36
5700.00	Peak	91.99	13.56	105.55	--	--
5700.00	Average	84.60	13.56	98.16	--	--
5799.00	Peak	49.29	14.15	63.44	68.20	-4.76

**Test Data for UNII-2c**


**(4) MIMO**

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

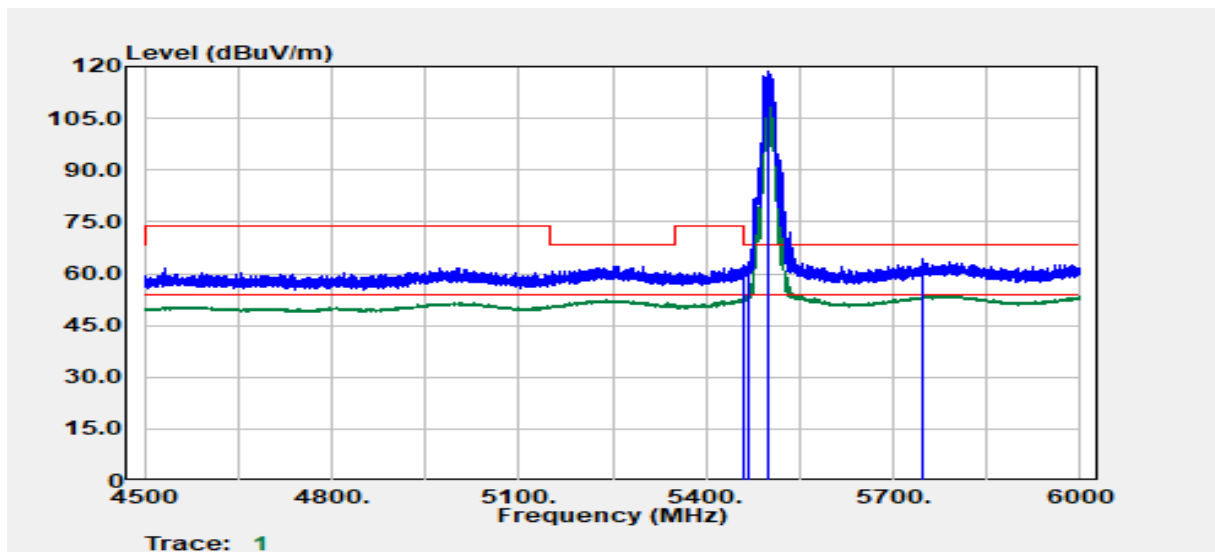


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.65	Average	40.62	12.41	53.03	54.00	-0.97
5458.95	Peak	50.13	12.41	62.53	74.00	-11.47
5468.40	Peak	50.96	12.44	63.40	68.20	-4.80
5500.00	Peak	106.18	12.55	118.73	--	--
5500.00	Average	99.28	12.55	111.83	--	--
5746.05	Peak	50.29	13.80	64.09	68.20	-4.11

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

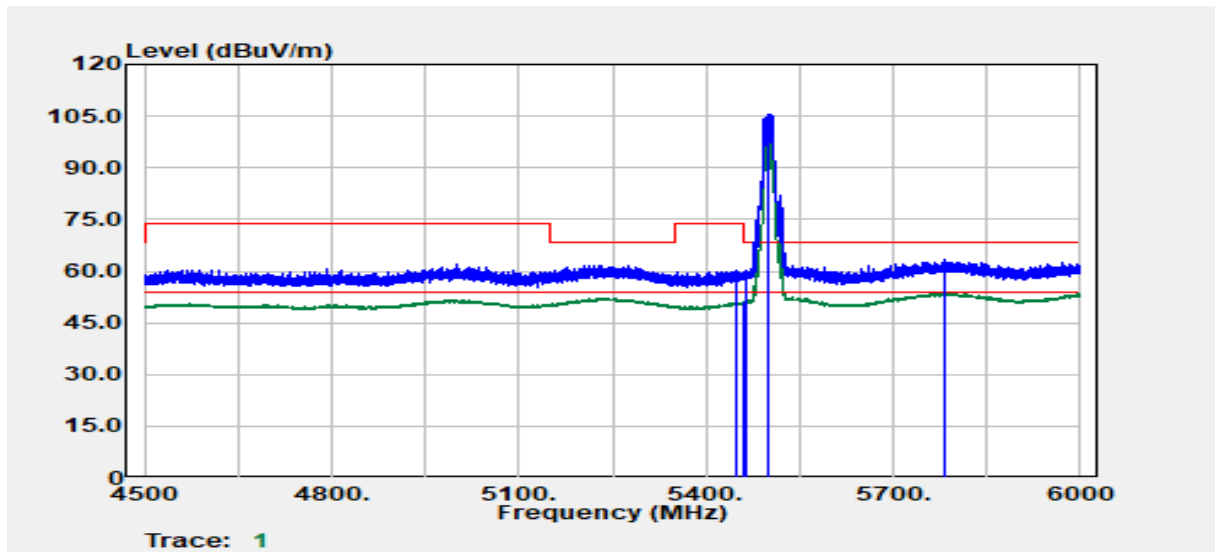


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5448.15	Peak	48.01	12.37	60.38	74.00	-13.62
5459.40	Average	38.63	12.41	51.04	54.00	-2.96
5464.95	Peak	47.89	12.43	60.31	68.20	-7.89
5500.00	Peak	93.02	12.55	105.57	--	--
5500.00	Average	86.31	12.55	98.86	--	--
5781.00	Peak	49.43	14.03	63.46	68.20	-4.74

Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

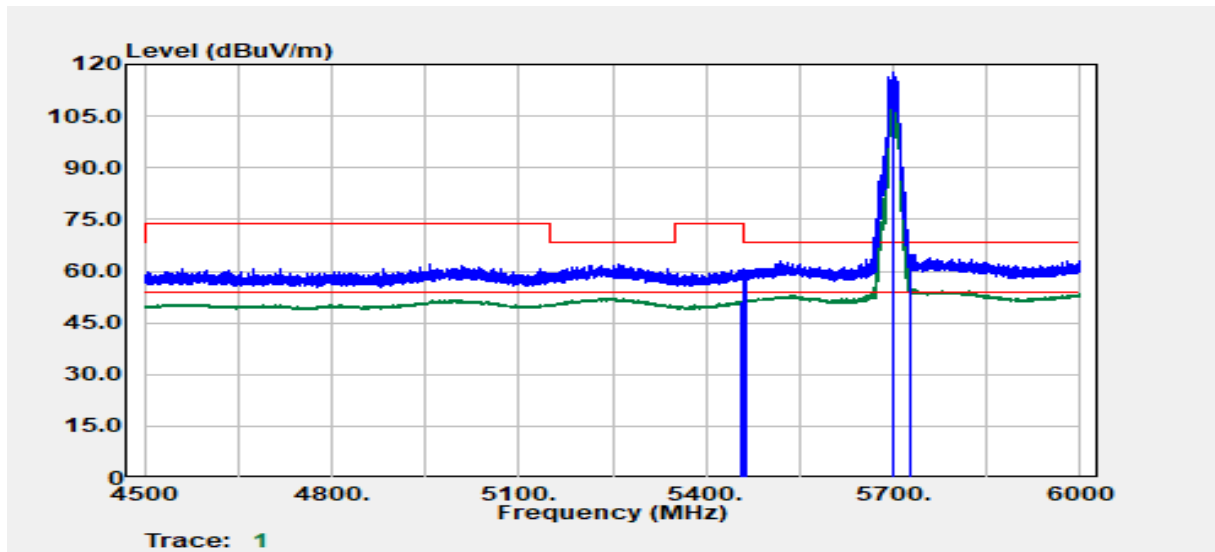

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.75	Average	38.92	12.40	51.32	54.00	-2.68
5459.55	Peak	48.05	12.41	60.45	74.00	-13.55
5463.75	Peak	47.83	12.42	60.26	68.20	-7.94
5700.00	Peak	104.05	13.56	117.61	--	--
5700.00	Average	97.52	13.56	111.08	--	--
5728.65	Peak	50.98	13.71	64.69	68.20	-3.51


Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

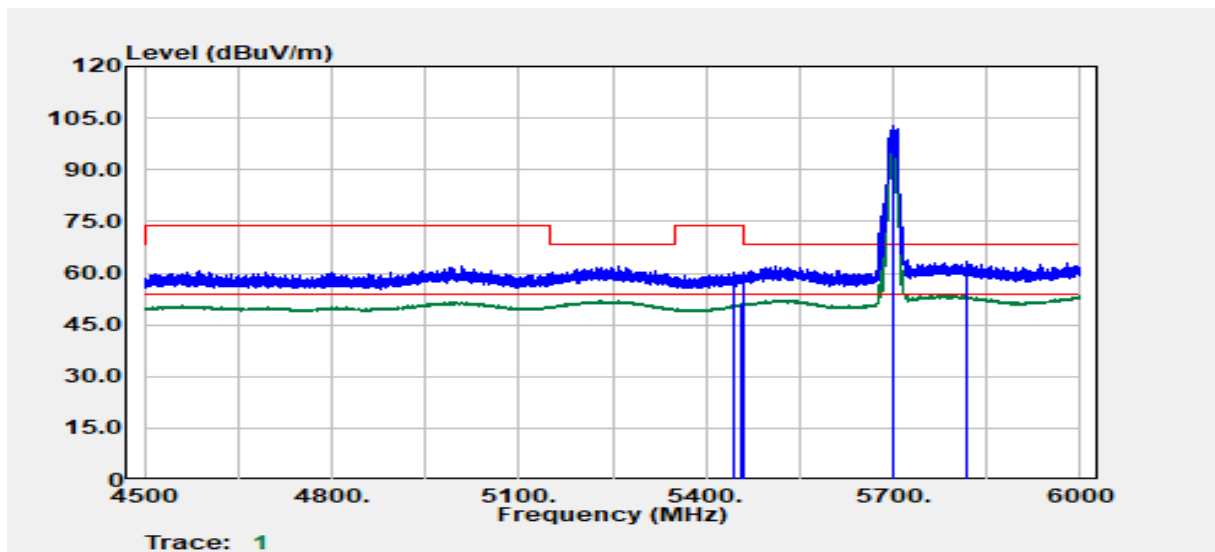

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5445.75	Peak	48.04	12.37	60.41	74.00	-13.59
5454.75	Average	38.57	12.39	50.96	54.00	-3.04
5461.50	Peak	47.76	12.42	60.17	68.20	-8.03
5700.00	Peak	89.27	13.56	102.83	--	--
5700.00	Average	82.70	13.56	96.26	--	--
5817.60	Peak	49.08	14.11	63.19	68.20	-5.01




Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

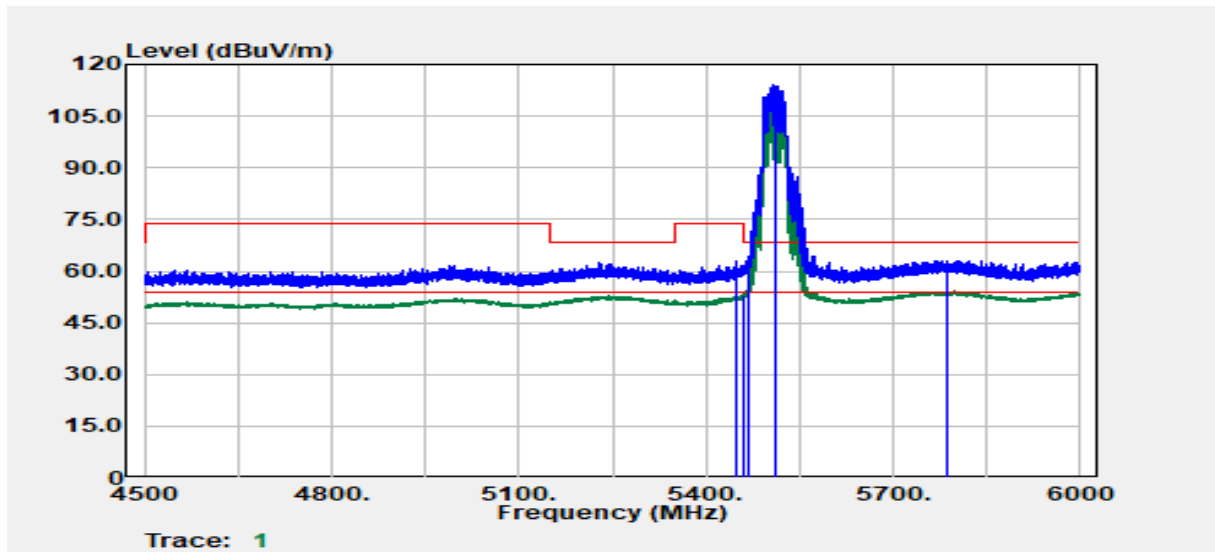


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5449.20	Peak	50.40	12.37	62.77	74.00	-11.23
5458.50	Average	40.78	12.40	53.18	54.00	-0.82
5469.00	Peak	51.86	12.44	64.30	68.20	-3.90
5510.00	Peak	101.65	12.62	114.27	--	--
5510.00	Average	95.76	12.62	108.38	--	--
5787.60	Peak	49.01	14.08	63.09	68.20	-5.11

Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

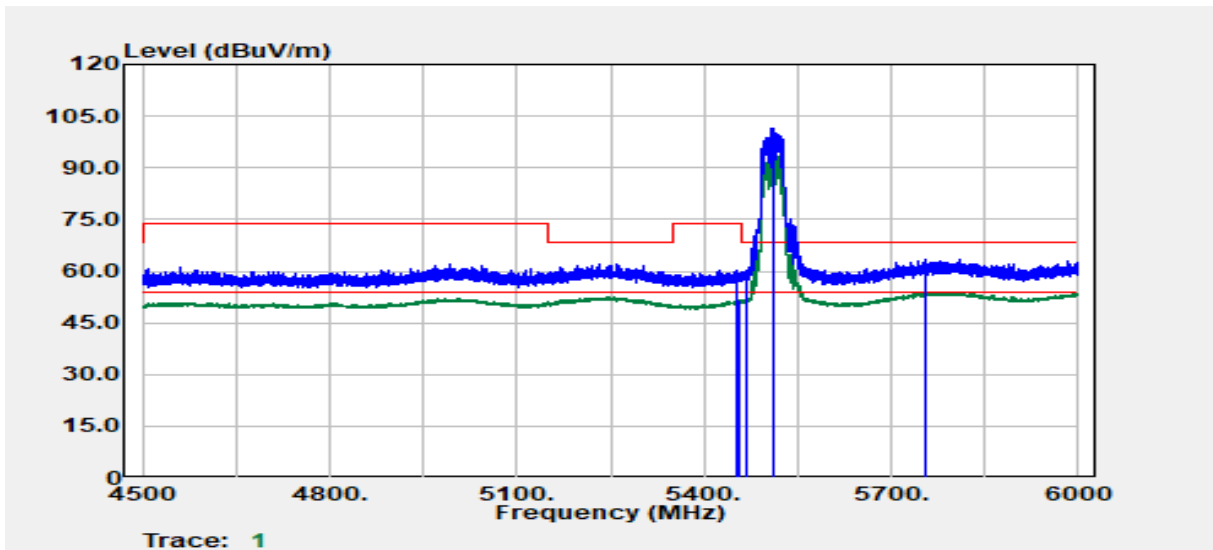


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.65	Peak	47.94	12.38	60.33	74.00	-13.67
5457.45	Average	39.08	12.40	51.48	54.00	-2.52
5470.05	Peak	47.88	12.45	60.33	68.20	-7.87
5510.00	Peak	88.66	12.62	101.28	--	--
5510.00	Average	81.90	12.62	94.53	--	--
5755.95	Peak	49.54	13.86	63.40	68.20	-4.80

Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

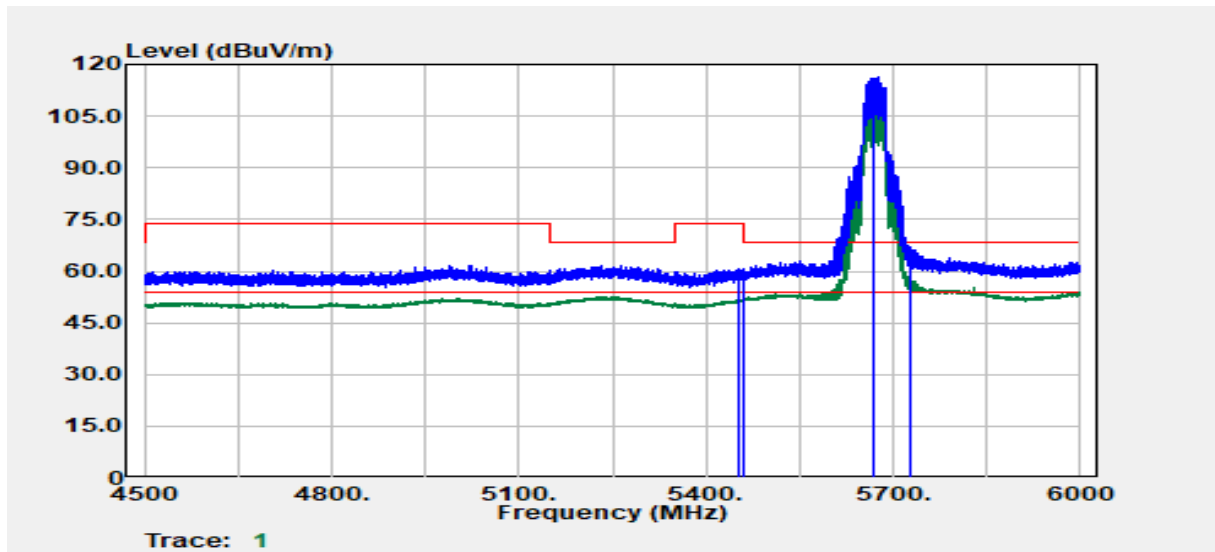


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5453.40	Peak	48.15	12.39	60.54	74.00	-13.46
5459.40	Average	39.61	12.41	52.02	54.00	-1.98
5461.80	Peak	48.05	12.42	60.47	68.20	-7.73
5670.00	Peak	103.15	13.39	116.54	--	--
5670.00	Average	96.78	13.39	110.17	--	--
5726.10	Peak	53.54	13.70	67.24	68.20	-0.96

Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

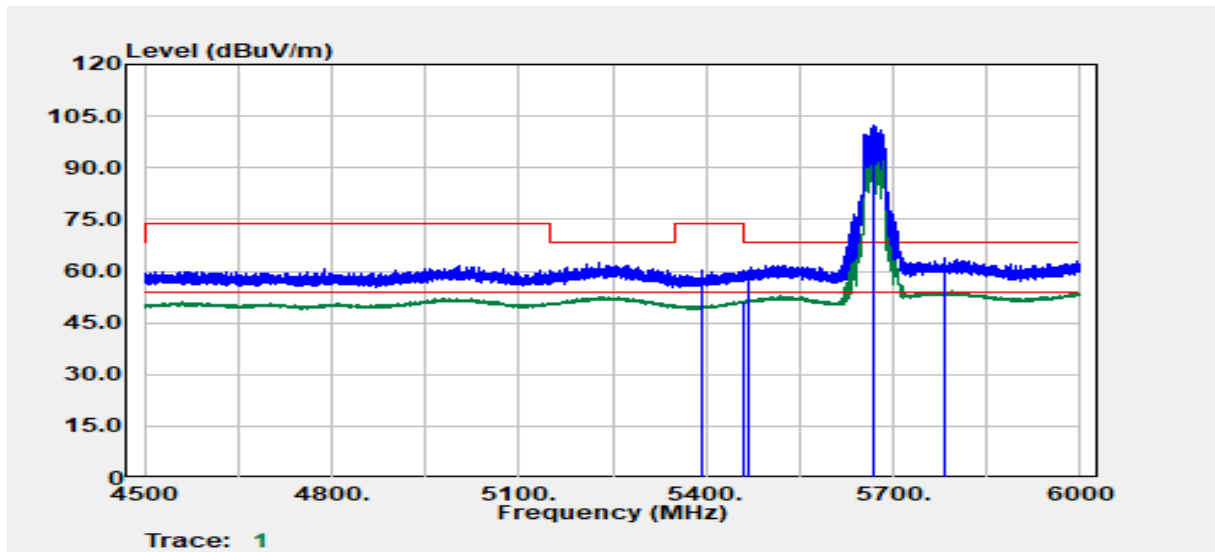


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5392.65	Peak	47.86	12.29	60.15	74.00	-13.85
5458.35	Average	38.87	12.40	51.28	54.00	-2.72
5466.45	Peak	47.72	12.43	60.15	68.20	-8.05
5670.00	Peak	89.14	13.39	102.53	--	--
5670.00	Average	82.70	13.39	96.09	--	--
5781.75	Peak	49.77	14.04	63.81	68.20	-4.39

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

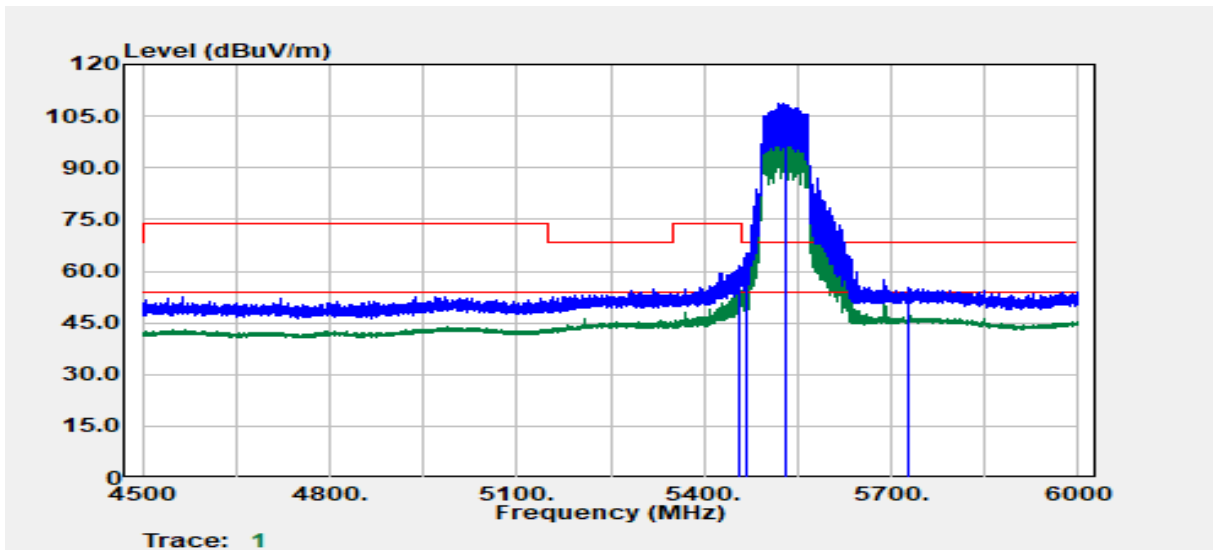


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5455.05	Average	40.64	12.39	53.04	54.00	-0.96
5455.95	Peak	49.25	12.40	61.65	74.00	-12.35
5469.90	Peak	52.61	12.44	65.06	68.20	-3.14
5530.00	Peak	95.98	12.77	108.75	--	--
5530.00	Average	89.74	12.77	102.51	--	--
5727.45	Peak	41.36	13.70	55.06	68.20	-13.14

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 17, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

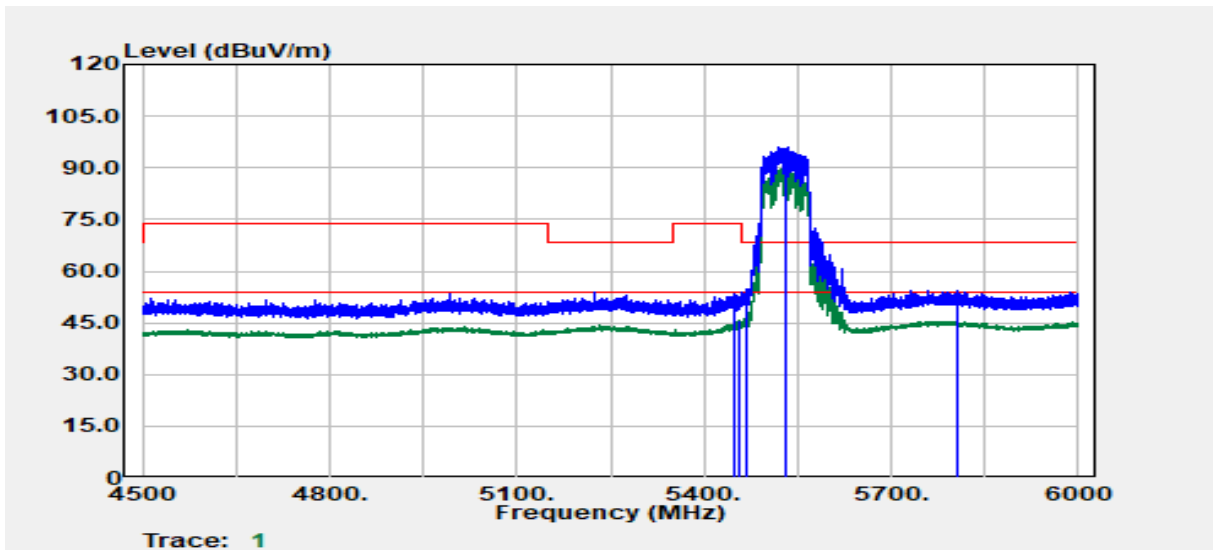


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5446.95	Peak	41.07	12.37	53.44	74.00	-20.56
5457.60	Average	33.49	12.40	45.89	54.00	-8.11
5469.60	Peak	42.26	12.44	54.71	68.20	-13.49
5530.00	Peak	83.30	12.77	96.07	--	--
5530.00	Average	76.88	12.77	89.65	--	--
5806.20	Peak	40.29	14.14	54.43	68.20	-13.77

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

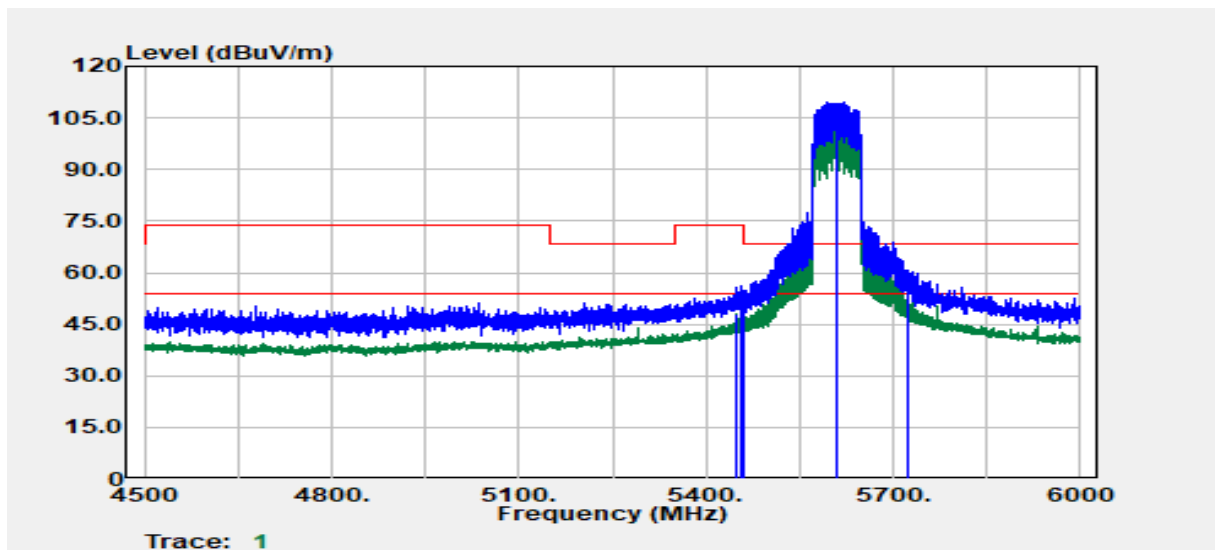

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5449.80	Average	35.70	12.37	48.08	54.00	-5.92
5455.20	Peak	43.81	12.39	56.21	74.00	-17.79
5460.60	Peak	42.54	12.41	54.95	68.20	-13.25
5610.00	Peak	96.81	12.92	109.73	--	--
5610.00	Average	90.53	12.92	103.45	--	--
5725.20	Peak	47.06	13.69	60.75	68.20	-7.45


Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

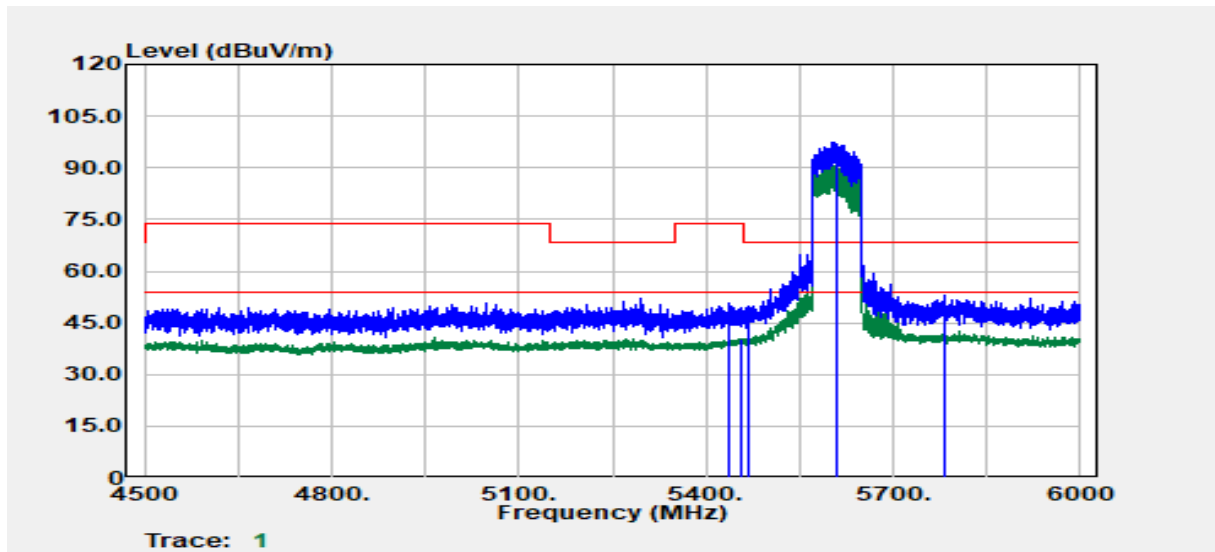

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5437.80	Peak	38.40	12.36	50.76	74.00	-23.24
5454.90	Average	28.01	12.39	40.40	54.00	-13.60
5467.20	Peak	37.23	12.44	49.67	68.20	-18.53
5610.00	Peak	84.50	12.92	97.42	--	--
5610.00	Average	77.78	12.92	90.70	--	--
5783.70	Peak	38.74	14.05	52.79	68.20	-15.41




Test Mode	IEEE 802.11ac VHT160 / 5570 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

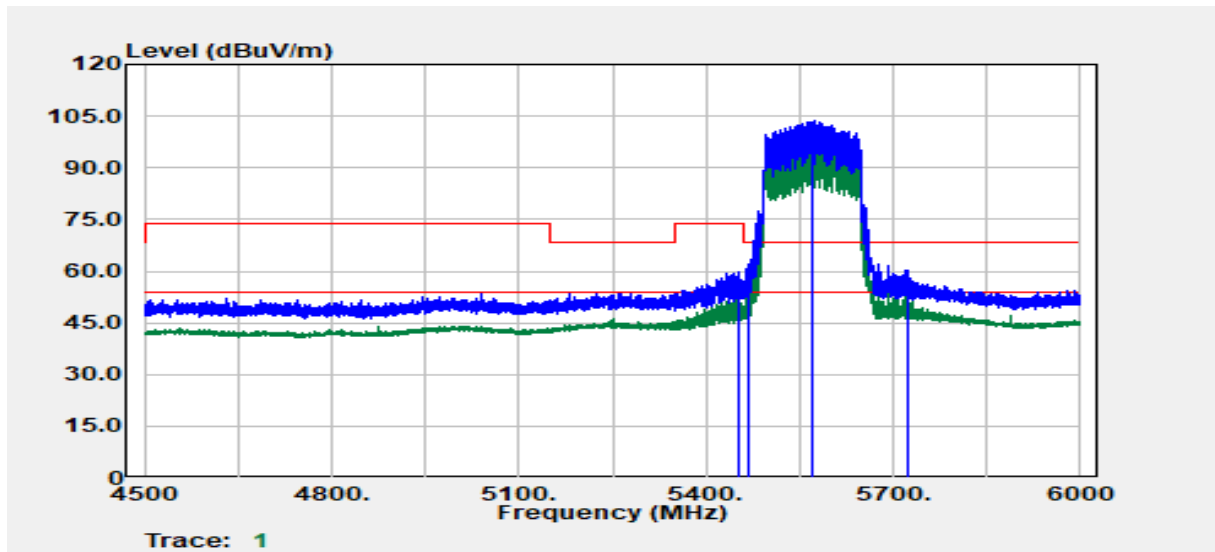


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.00	Peak	47.46	12.38	59.84	74.00	-14.16
5451.00	Average	40.52	12.38	52.90	54.00	-1.10
5466.45	Peak	49.39	12.43	61.82	68.20	-6.38
5570.00	Peak	90.60	12.88	103.48	--	--
5570.00	Average	84.90	12.88	97.78	--	--
5725.05	Peak	45.54	13.69	59.23	68.20	-8.97

Test Mode	IEEE 802.11ac VHT160 / 5570 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

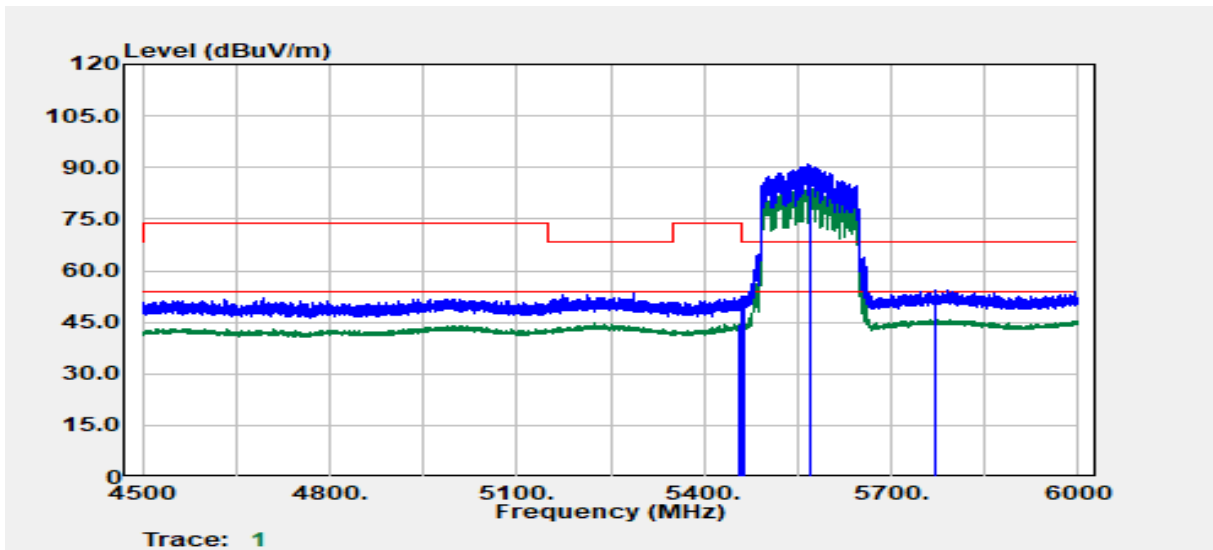


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.90	Average	32.05	12.40	44.46	54.00	-9.54
5458.35	Peak	39.98	12.40	52.39	74.00	-21.61
5464.65	Peak	40.27	12.43	52.70	68.20	-15.50
5570.00	Peak	78.14	12.88	91.02	--	--
5570.00	Average	71.36	12.88	84.24	--	--
5769.75	Peak	40.58	13.95	54.54	68.20	-13.66

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

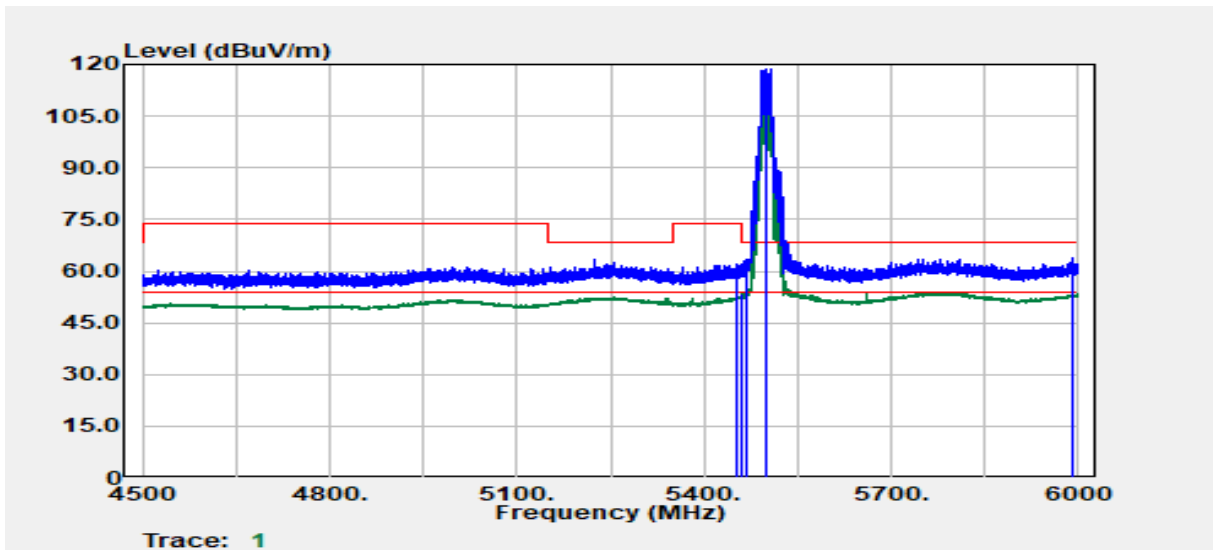


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5453.25	Peak	49.70	12.39	62.09	74.00	-11.91
5460.00	Average	40.81	12.41	53.22	54.00	-0.78
5470.05	Peak	50.76	12.45	63.20	68.20	-5.00
5500.00	Peak	106.24	12.55	118.79	--	--
5500.00	Average	98.94	12.55	111.49	--	--
5989.65	Peak	49.49	14.15	63.64	68.20	-4.56

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

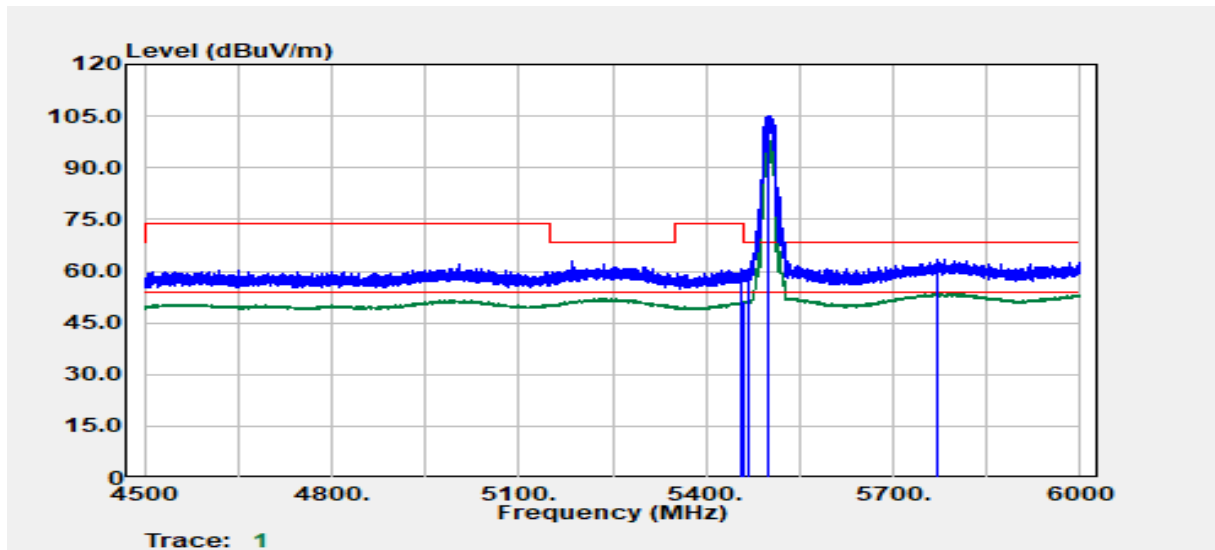


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.05	Peak	48.12	12.40	60.52	74.00	-13.48
5459.70	Average	38.65	12.41	51.06	54.00	-2.94
5467.80	Peak	48.42	12.44	60.85	68.20	-7.35
5500.00	Peak	92.57	12.55	105.12	--	--
5500.00	Average	85.24	12.55	97.79	--	--
5771.40	Peak	49.28	13.97	63.24	68.20	-4.96

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

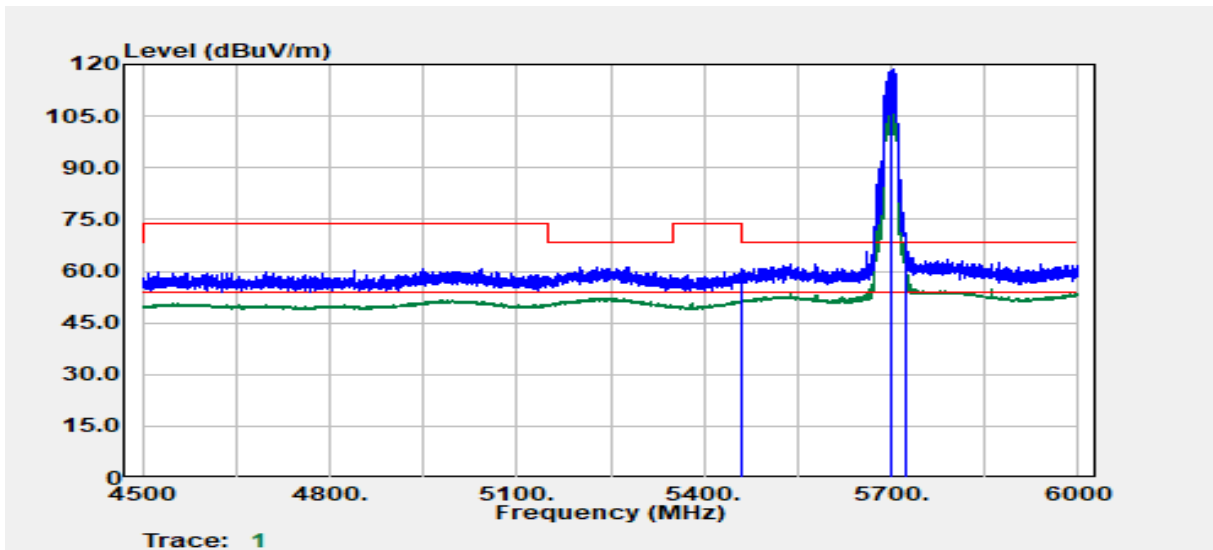


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5459.70	Peak	47.59	12.41	60.00	74.00	-14.00
5460.00	Average	39.31	12.41	51.72	54.00	-2.28
5461.50	Peak	48.43	12.42	60.84	68.20	-7.36
5700.00	Peak	105.08	13.56	118.64	--	--
5700.00	Average	97.72	13.56	111.28	--	--
5725.00	Peak	52.41	13.69	66.10	68.20	-2.10

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

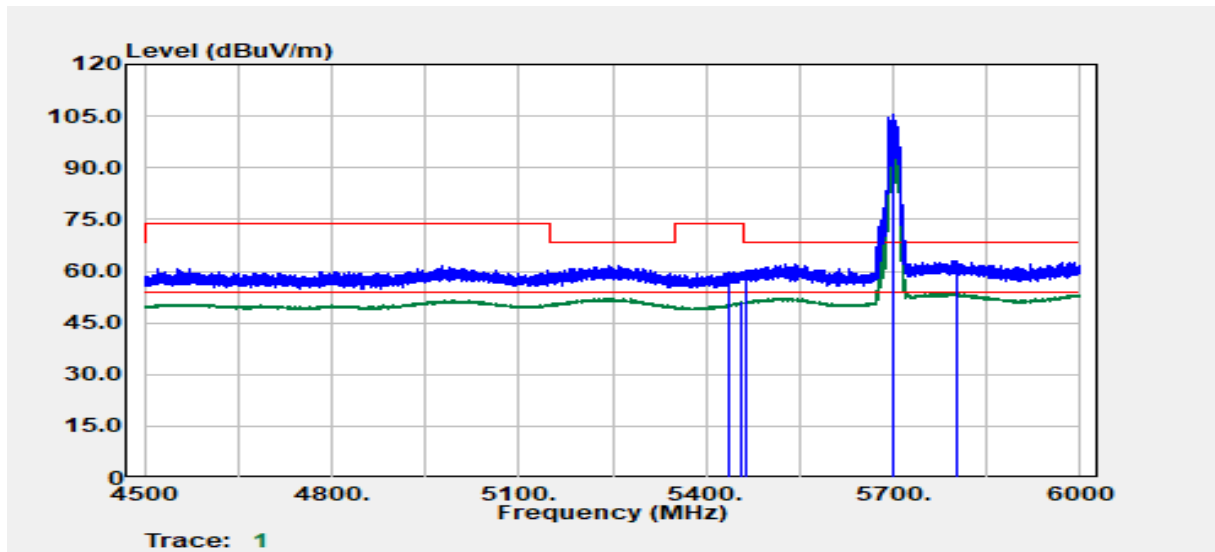


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5438.25	Peak	47.42	12.36	59.79	74.00	-14.21
5454.90	Average	38.61	12.39	51.00	54.00	-3.00
5463.90	Peak	47.68	12.42	60.11	68.20	-8.09
5700.00	Peak	91.85	13.56	105.41	--	--
5700.00	Average	83.40	13.56	96.96	--	--
5802.30	Peak	48.91	14.15	63.07	68.20	-5.13

Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

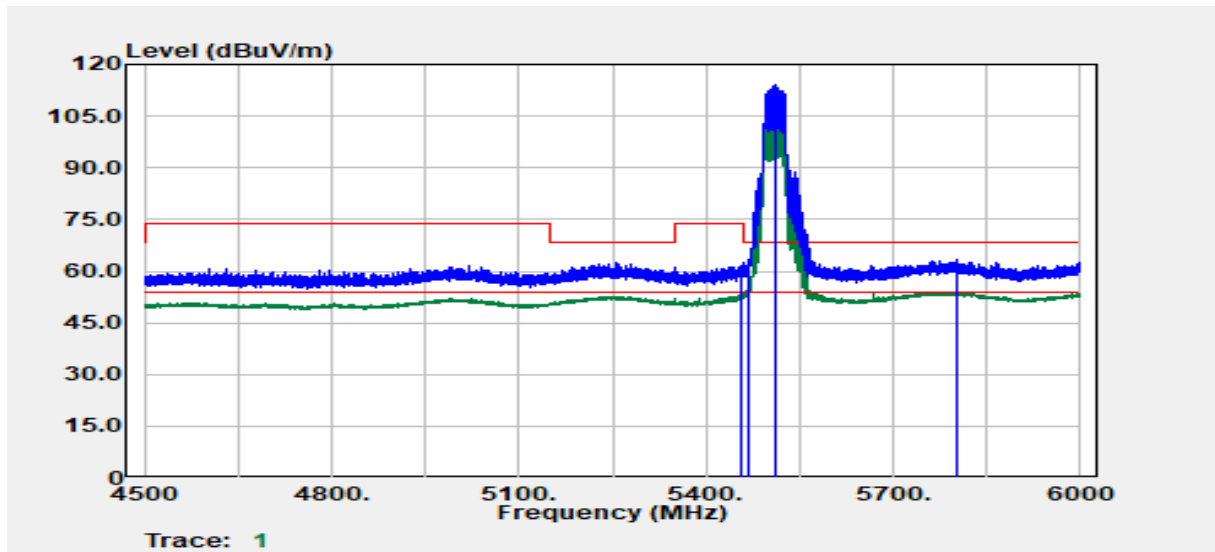

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5456.10	Peak	48.97	12.40	61.37	74.00	-12.63
5456.25	Average	40.61	12.40	53.01	54.00	-0.99
5470.05	Peak	50.83	12.45	63.28	68.20	-4.92
5510.00	Peak	101.71	12.62	114.34	--	--
5510.00	Average	95.45	12.62	108.08	--	--
5801.70	Peak	49.07	14.16	63.22	68.20	-4.98


Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

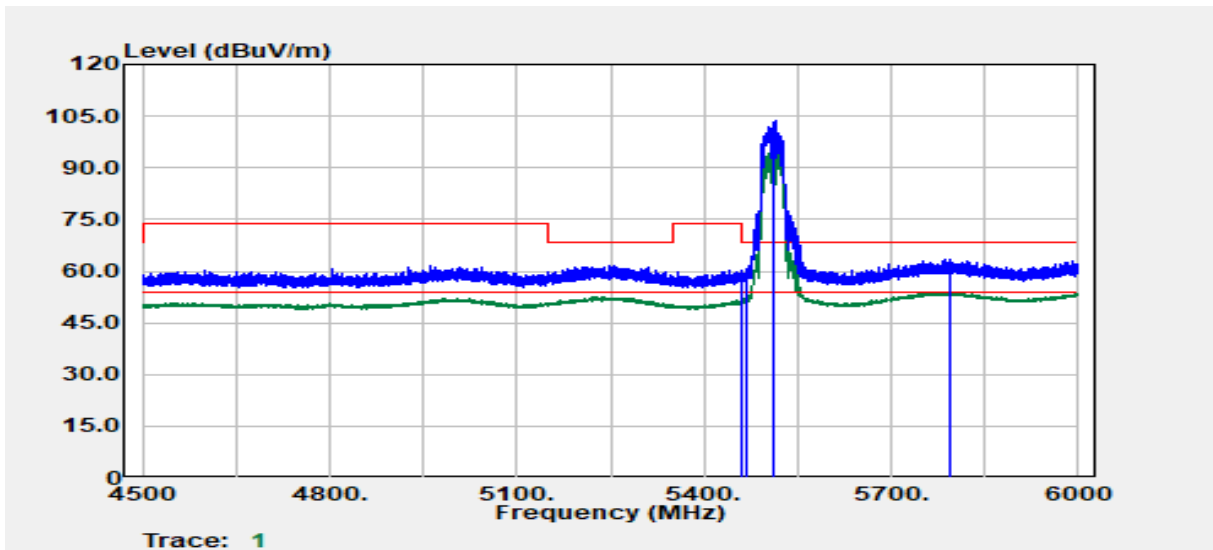

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.65	Peak	47.80	12.41	60.20	74.00	-13.80
5458.95	Average	39.06	12.41	51.47	54.00	-2.53
5468.40	Peak	48.06	12.44	60.50	68.20	-7.70
5510.00	Peak	91.03	12.62	103.65	--	--
5510.00	Average	82.13	12.62	94.75	--	--
5793.90	Peak	49.39	14.12	63.51	68.20	-4.69




Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

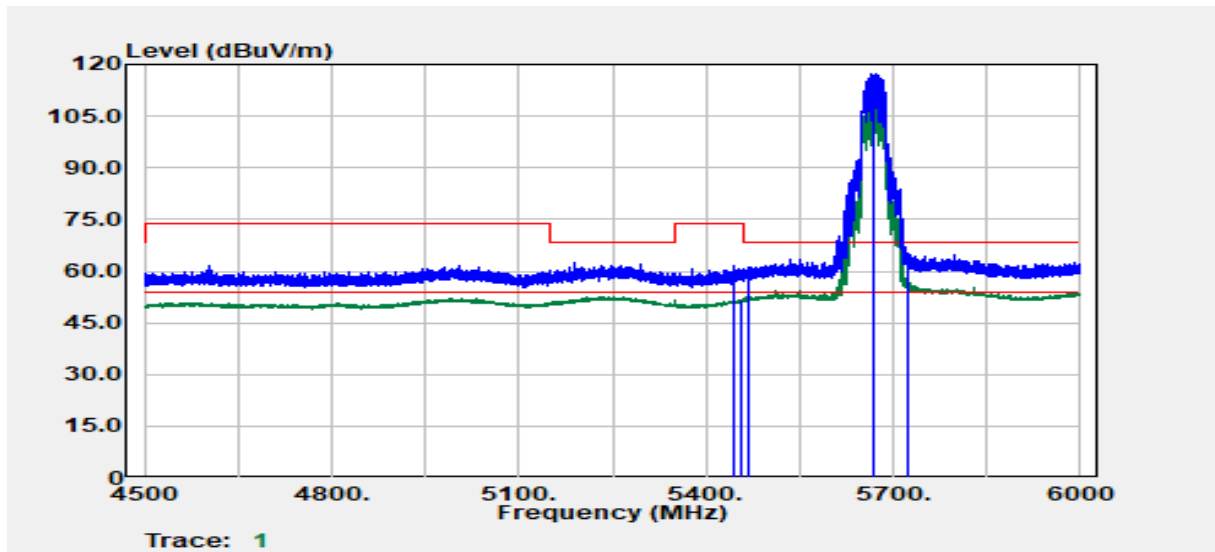


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5446.20	Peak	49.29	12.37	61.66	74.00	-12.34
5458.05	Average	39.33	12.40	51.74	54.00	-2.26
5470.05	Peak	48.60	12.45	61.04	68.20	-7.16
5670.00	Peak	104.02	13.39	117.41	--	--
5670.00	Average	95.34	13.39	108.73	--	--
5725.20	Peak	51.59	13.69	65.28	68.20	-2.92

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

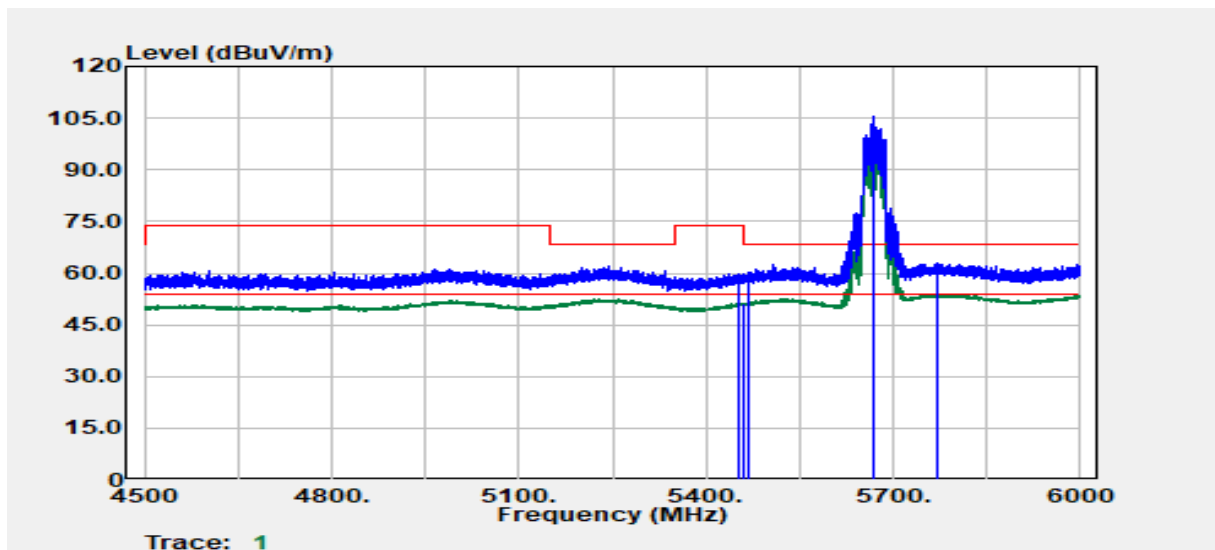


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5428.80	Average	31.47	12.35	43.82	54.00	-10.18
5457.00	Peak	39.58	12.40	51.98	74.00	-22.02
5466.60	Peak	39.83	12.43	52.26	68.20	-15.94
5670.00	Peak	100.42	13.39	113.81	--	--
5670.00	Average	90.77	13.39	104.16	--	--
5726.70	Peak	51.74	13.70	65.44	68.20	-2.76

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

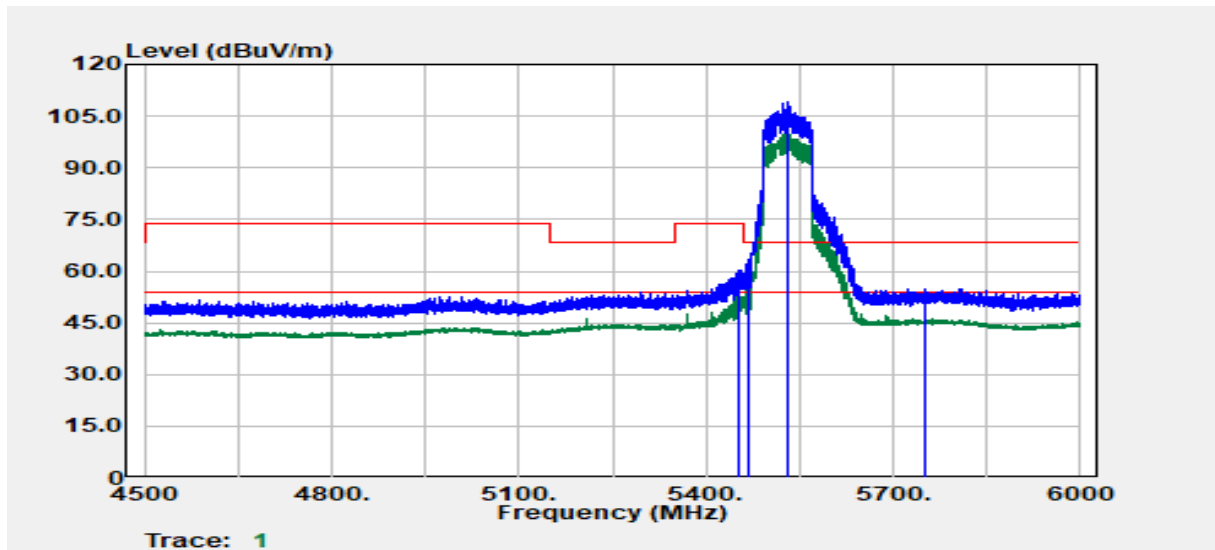


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5453.85	Peak	47.99	12.39	60.38	74.00	-13.62
5454.30	Average	40.93	12.39	53.32	54.00	-0.68
5469.90	Peak	50.76	12.44	63.20	68.20	-5.00
5530.00	Peak	96.16	12.77	108.93	--	--
5530.00	Average	86.99	12.77	99.76	--	--
5751.60	Peak	41.07	13.83	54.90	68.20	-13.30

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

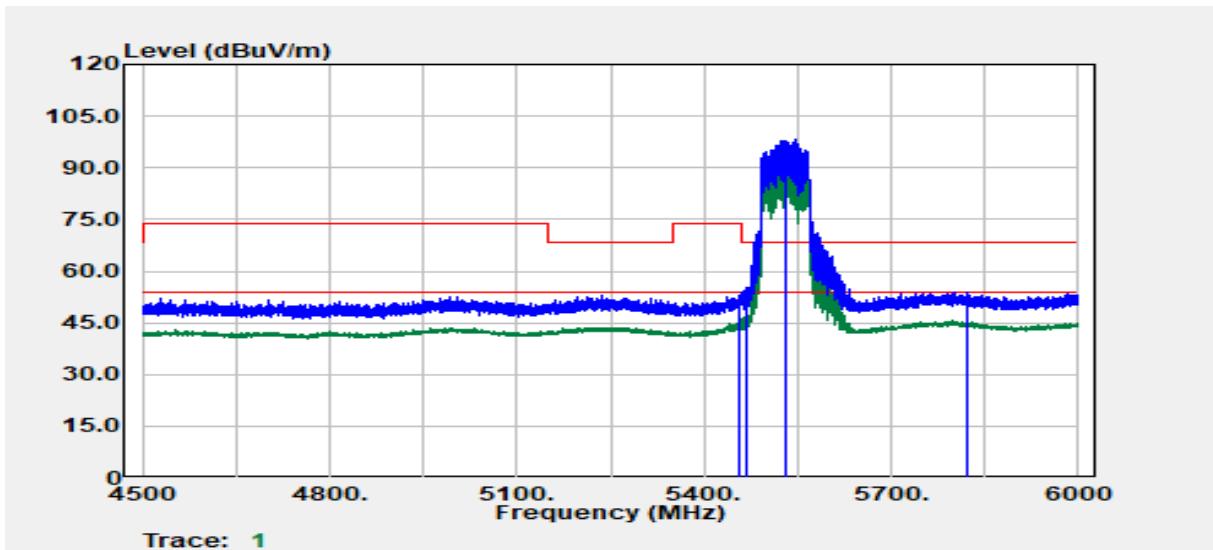


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.15	Average	33.24	12.40	45.64	54.00	-8.36
5457.75	Peak	40.68	12.40	53.09	74.00	-20.91
5466.15	Peak	42.86	12.43	55.29	68.20	-12.91
5530.00	Peak	85.59	12.77	98.36	--	--
5530.00	Average	77.91	12.77	90.67	--	--
5822.85	Peak	39.75	14.10	53.85	68.20	-14.35

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

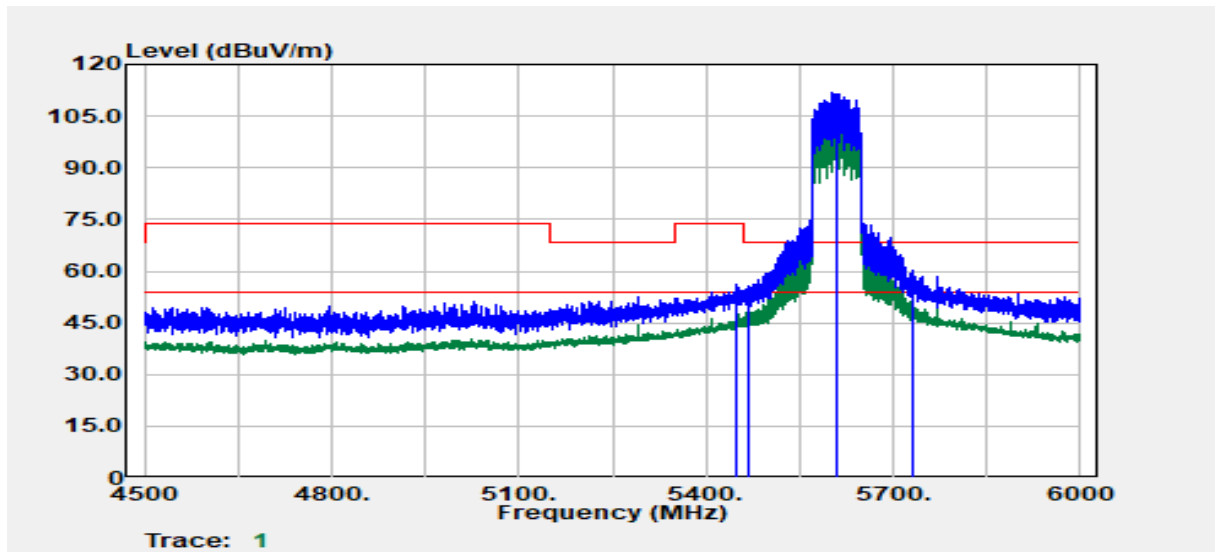


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5450.10	Peak	43.89	12.38	56.26	74.00	-17.74
5450.10	Average	36.98	12.38	49.35	54.00	-4.65
5468.10	Peak	43.28	12.44	55.72	68.20	-12.48
5610.00	Peak	98.84	12.92	111.76	--	--
5610.00	Average	90.06	12.92	102.98	--	--
5730.30	Peak	46.57	13.72	60.29	68.20	-7.91

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

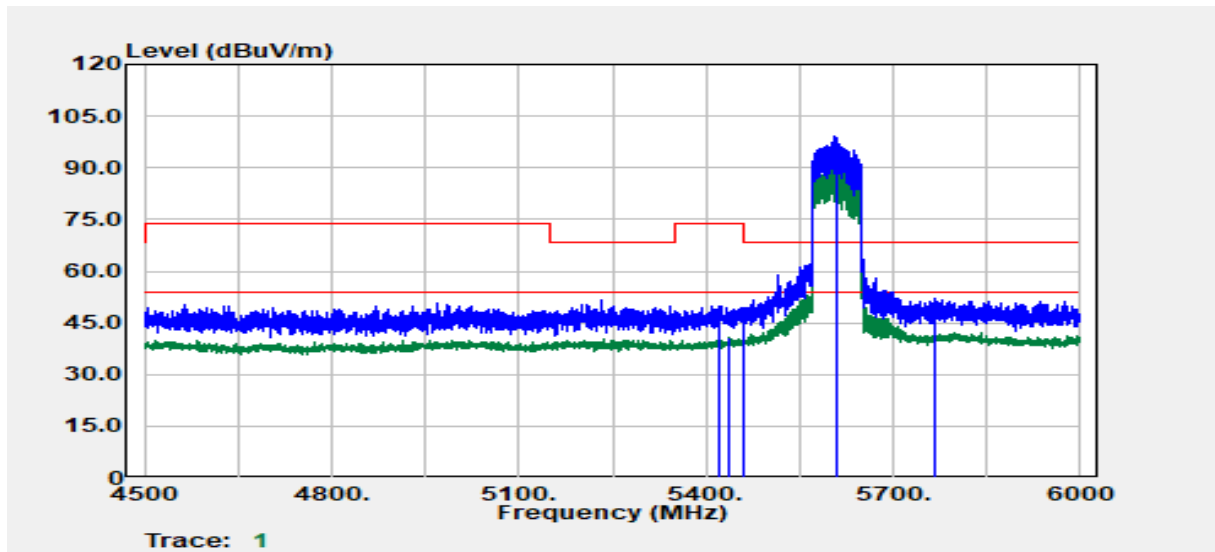


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5420.70	Peak	37.38	12.34	49.72	74.00	-24.28
5435.70	Average	28.18	12.36	40.54	54.00	-13.46
5460.90	Peak	37.12	12.41	49.53	68.20	-18.67
5610.00	Peak	86.27	12.92	99.19	--	--
5610.00	Average	77.33	12.92	90.25	--	--
5765.10	Peak	38.04	13.92	51.96	68.20	-16.24

Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

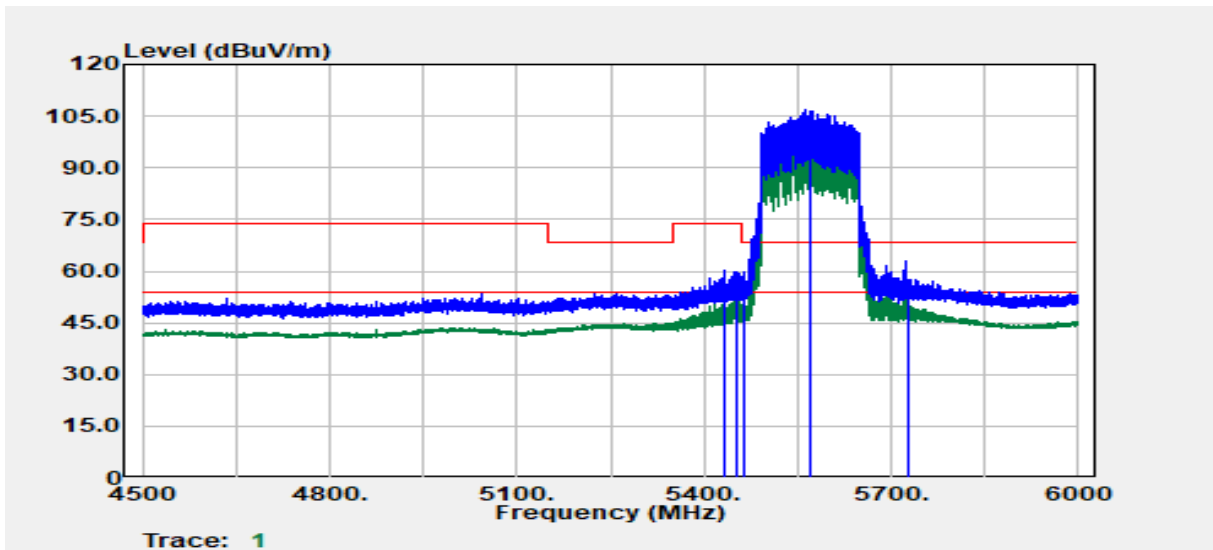

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5432.70	Peak	48.05	12.36	60.41	74.00	-13.59
5452.35	Average	40.52	12.38	52.90	54.00	-1.10
5463.75	Peak	47.22	12.42	59.65	68.20	-8.55
5570.00	Peak	93.85	12.88	106.73	--	--
5570.00	Average	85.08	12.88	97.96	--	--
5728.50	Peak	43.80	13.71	57.51	68.20	-10.69

Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

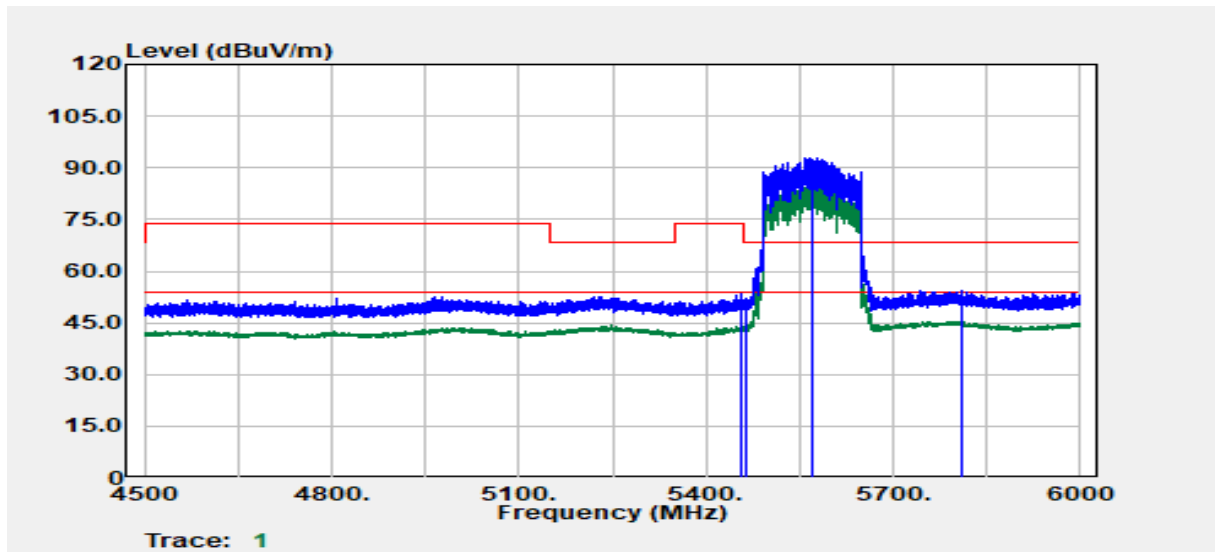


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5456.70	Average	31.81	12.40	44.21	54.00	-9.79
5457.60	Peak	40.91	12.40	53.31	74.00	-20.69
5464.95	Peak	39.71	12.43	52.14	68.20	-16.06
5570.00	Peak	80.11	12.88	92.99	--	--
5570.00	Average	72.26	12.88	85.14	--	--
5808.30	Peak	40.37	14.14	54.51	68.20	-13.69



**Test Data for UNII-3**


**(1) Chain 0**

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

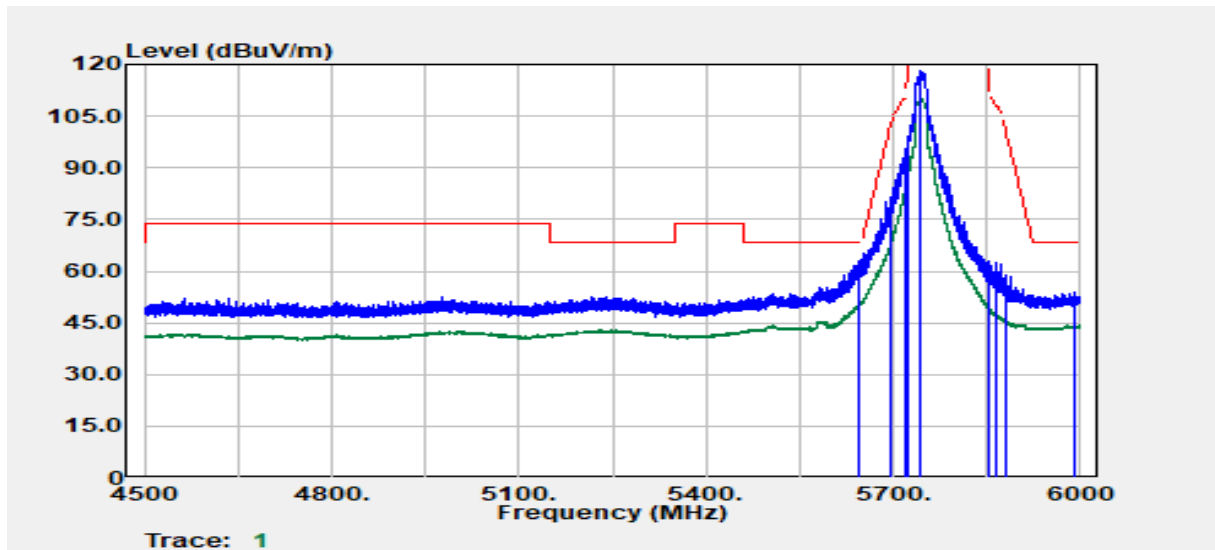


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5645.10	Peak	49.64	13.24	62.88	68.20	-5.32
5697.15	Peak	68.16	13.54	81.70	103.10	-21.40
5719.50	Peak	81.11	13.66	94.78	110.66	-15.88
5724.75	Peak	85.59	13.69	99.28	121.63	-22.35
5745.00	Peak	104.38	13.79	118.17	--	--
5745.00	Average	96.51	13.79	110.30	--	--
5851.50	Peak	47.35	14.02	61.37	118.78	-57.41
5863.80	Peak	48.39	14.02	62.42	108.33	-45.92
5881.95	Peak	44.69	14.03	58.72	100.04	-41.32
5989.80	Peak	39.82	14.15	53.97	68.20	-14.23

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

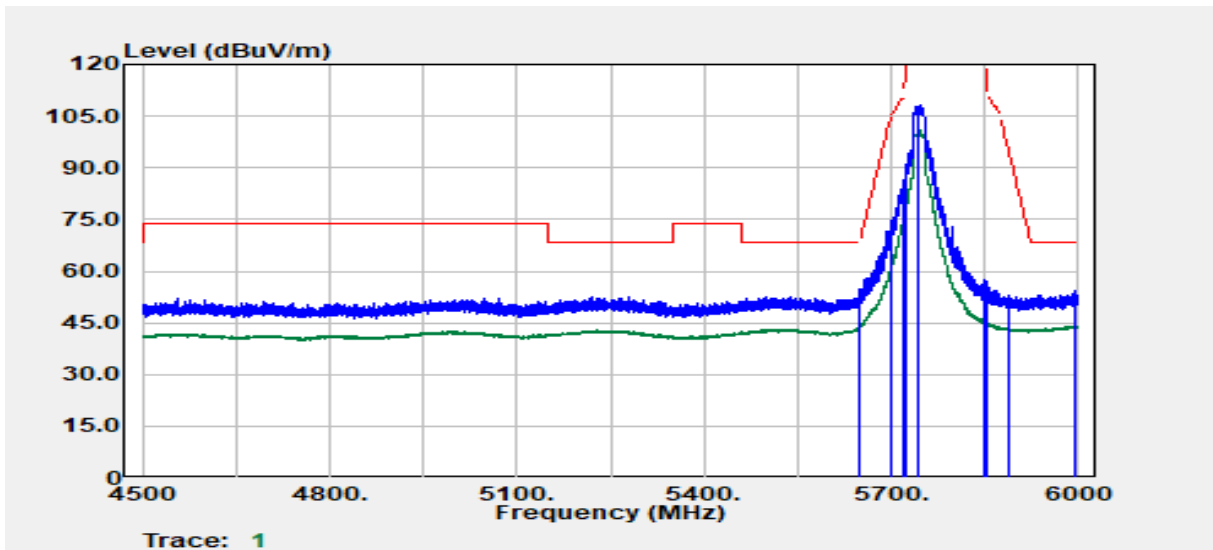


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.45	Peak	41.39	13.28	54.67	68.20	-13.53
5698.65	Peak	61.03	13.55	74.59	104.21	-29.62
5718.75	Peak	71.95	13.66	85.61	110.45	-24.84
5723.40	Peak	77.35	13.68	91.03	118.55	-27.52
5745.00	Peak	94.31	13.79	108.10	--	--
5745.00	Average	87.06	13.79	100.86	--	--
5850.75	Peak	42.76	14.02	56.78	120.49	-63.71
5854.95	Peak	42.95	14.02	56.98	110.91	-53.94
5886.75	Peak	38.84	14.03	52.86	96.48	-43.61
5993.10	Peak	40.33	14.15	54.48	68.20	-13.72

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

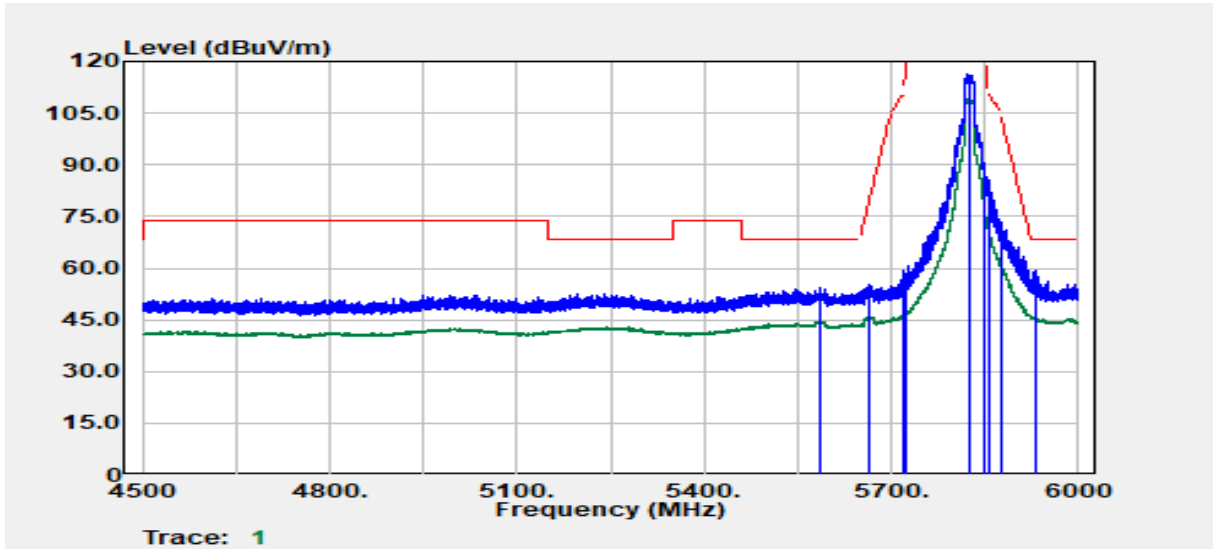

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5587.05	Peak	41.49	12.85	54.34	68.20	-13.86
5664.45	Peak	41.99	13.36	55.35	78.93	-23.58
5719.50	Peak	45.78	13.66	59.45	110.66	-51.21
5724.30	Peak	44.81	13.69	58.50	120.60	-62.11
5825.00	Peak	102.28	14.09	116.37	--	--
5825.00	Average	95.20	14.09	109.29	--	--
5850.60	Peak	75.71	14.02	89.73	120.83	-31.10
5857.20	Peak	71.35	14.02	85.37	110.18	-24.82
5877.45	Peak	59.11	14.03	73.14	103.38	-30.24
5931.30	Peak	45.40	14.11	59.51	68.20	-8.69

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

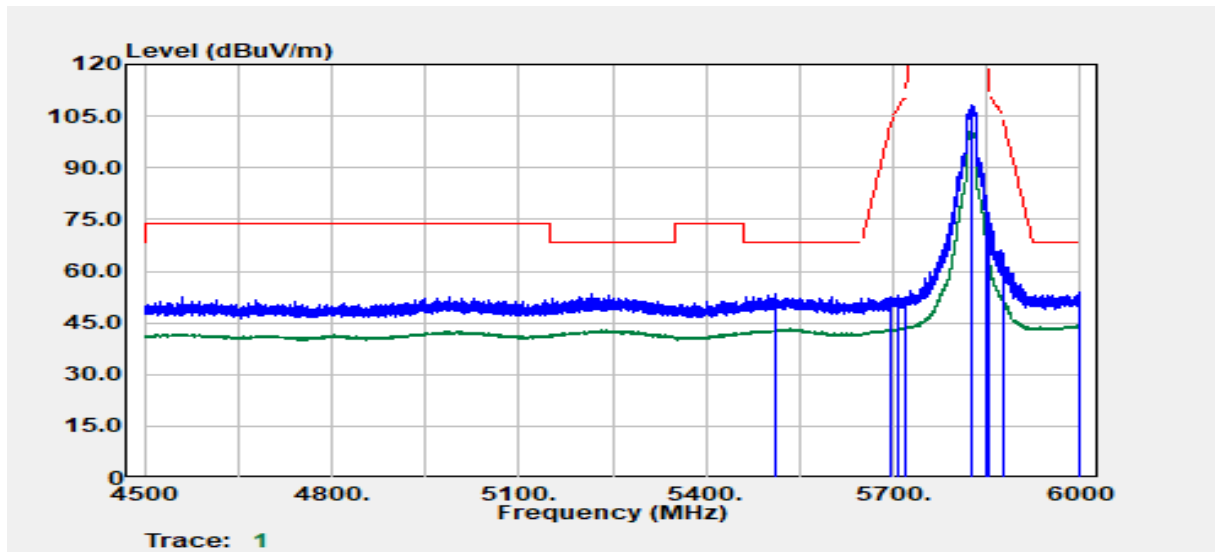


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5510.55	Peak	40.98	12.63	53.61	68.20	-14.59
5694.15	Peak	38.79	13.53	52.32	100.89	-48.57
5706.75	Peak	39.51	13.60	53.11	107.09	-53.99
5721.00	Peak	38.86	13.67	52.53	113.08	-60.55
5825.00	Peak	94.08	14.09	108.17	--	--
5825.00	Average	86.62	14.09	100.71	--	--
5850.15	Peak	64.50	14.02	78.52	121.86	-43.33
5855.10	Peak	59.83	14.02	73.85	110.77	-36.92
5877.15	Peak	51.03	14.03	65.06	103.60	-38.55
5997.90	Peak	39.79	14.15	53.94	68.20	-14.26

**Test Data for UNII-3**


**(2) Chain 1**

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

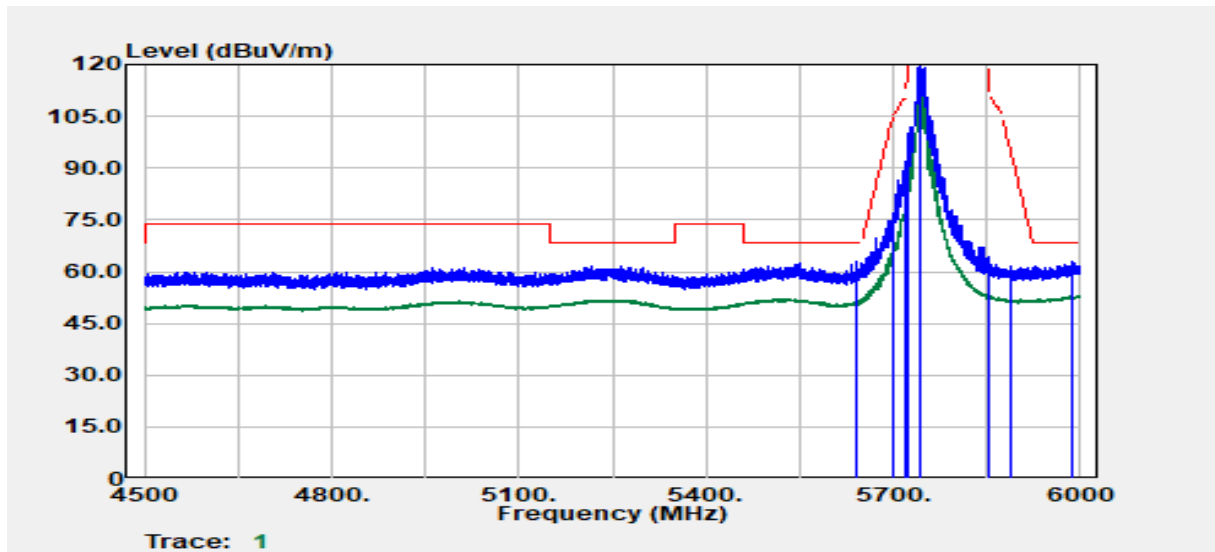


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5642.85	Peak	49.70	13.22	62.91	68.20	-5.29
5699.70	Peak	62.87	13.56	76.43	104.98	-28.55
5718.60	Peak	77.82	13.66	91.48	110.41	-18.93
5724.60	Peak	86.36	13.69	100.05	121.29	-21.24
5745.00	Peak	105.71	13.79	119.51	--	--
5745.00	Average	99.02	13.79	112.82	--	--
5854.95	Peak	50.14	14.02	64.16	110.91	-46.75
5854.95	Peak	50.14	14.02	64.16	110.91	-46.75
5888.85	Peak	47.42	14.03	61.45	94.92	-33.47
5988.00	Peak	48.73	14.15	62.88	68.20	-5.32

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

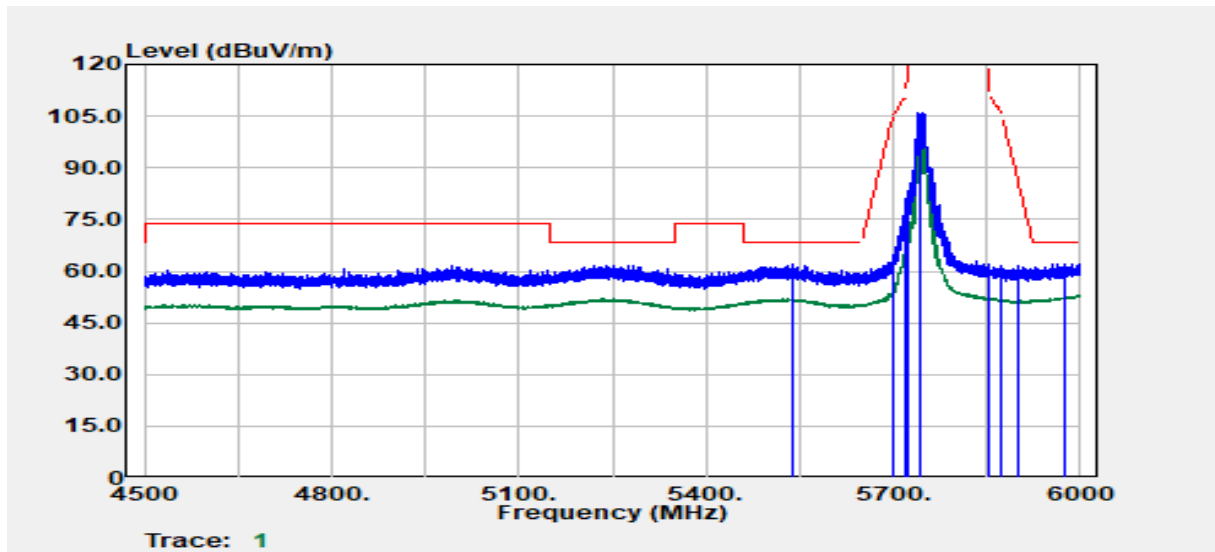


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5539.80	Peak	49.31	12.84	62.15	68.20	-6.05
5699.25	Peak	50.34	13.56	63.90	104.65	-40.75
5719.65	Peak	63.66	13.66	77.32	110.70	-33.38
5724.90	Peak	69.29	13.69	82.98	121.97	-39.00
5745.00	Peak	92.24	13.79	106.03	--	--
5745.00	Average	85.42	13.79	99.21	--	--
5853.90	Peak	47.99	14.02	62.01	113.31	-51.30
5871.45	Peak	47.59	14.02	61.62	106.19	-44.58
5900.70	Peak	47.46	14.03	61.49	86.14	-24.66
5974.50	Peak	47.95	14.16	62.11	68.20	-6.09

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

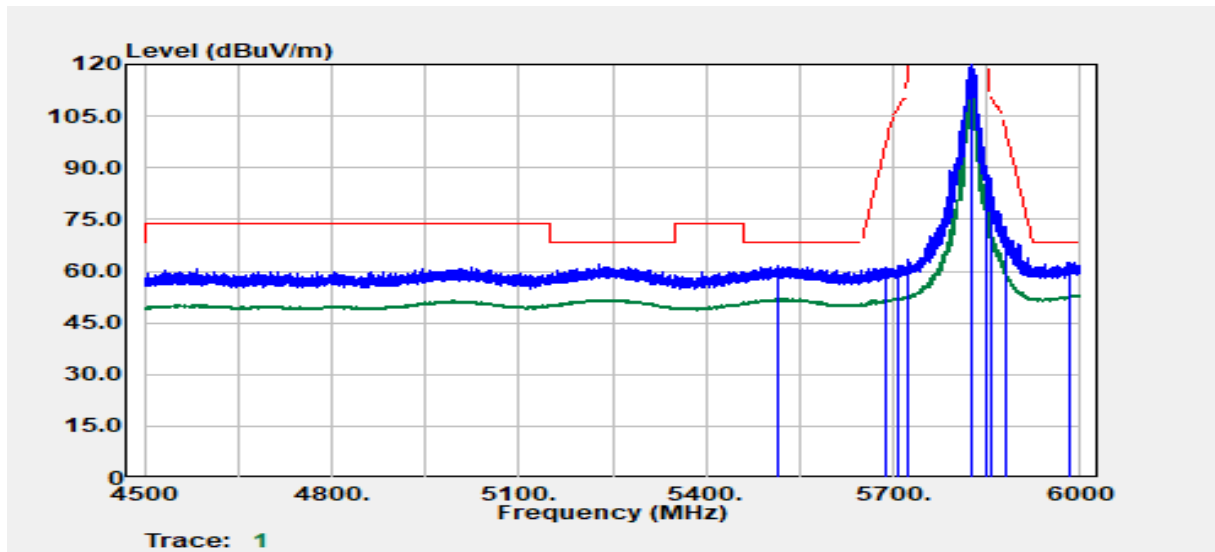

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5515.05	Peak	48.86	12.66	61.52	68.20	-6.68
5690.10	Peak	47.83	13.50	61.34	97.90	-36.56
5707.50	Peak	48.02	13.60	61.62	107.30	-45.68
5725.00	Peak	49.74	13.69	63.43	122.20	-58.77
5825.00	Peak	106.34	14.09	120.43	--	--
5825.00	Average	98.82	14.09	112.91	--	--
5850.45	Peak	75.74	14.02	89.76	121.17	-31.41
5855.40	Peak	72.94	14.02	86.96	110.69	-23.73
5881.65	Peak	59.10	14.03	73.13	100.26	-27.13
5982.60	Peak	48.18	14.15	62.33	68.20	-5.87

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

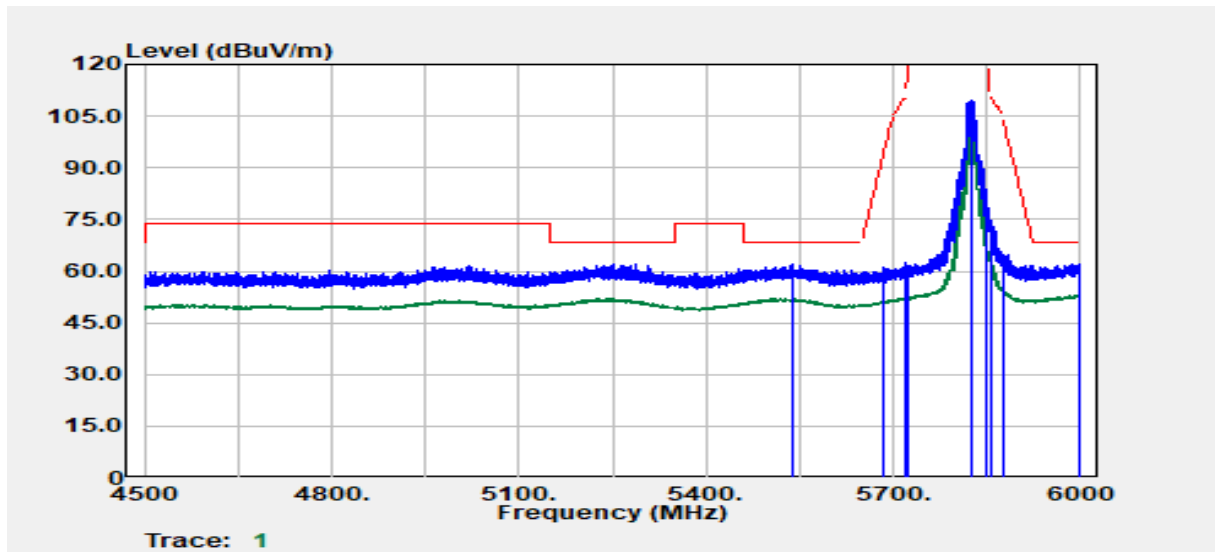


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5539.65	Peak	49.07	12.84	61.91	68.20	-6.29
5685.45	Peak	47.70	13.48	61.18	94.47	-33.29
5717.70	Peak	48.85	13.65	62.51	110.16	-47.65
5724.60	Peak	48.10	13.69	61.79	121.29	-59.50
5825.00	Peak	95.51	14.09	109.60	--	--
5825.00	Average	89.29	14.09	103.38	--	--
5850.00	Peak	66.93	14.02	80.95	122.20	-41.25
5857.65	Peak	60.85	14.02	74.88	110.06	-35.18
5875.20	Peak	50.90	14.03	64.92	105.05	-40.13
5997.15	Peak	47.97	14.15	62.12	68.20	-6.08



**Test Data for UNII-3**


**(3) Chain 2**

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

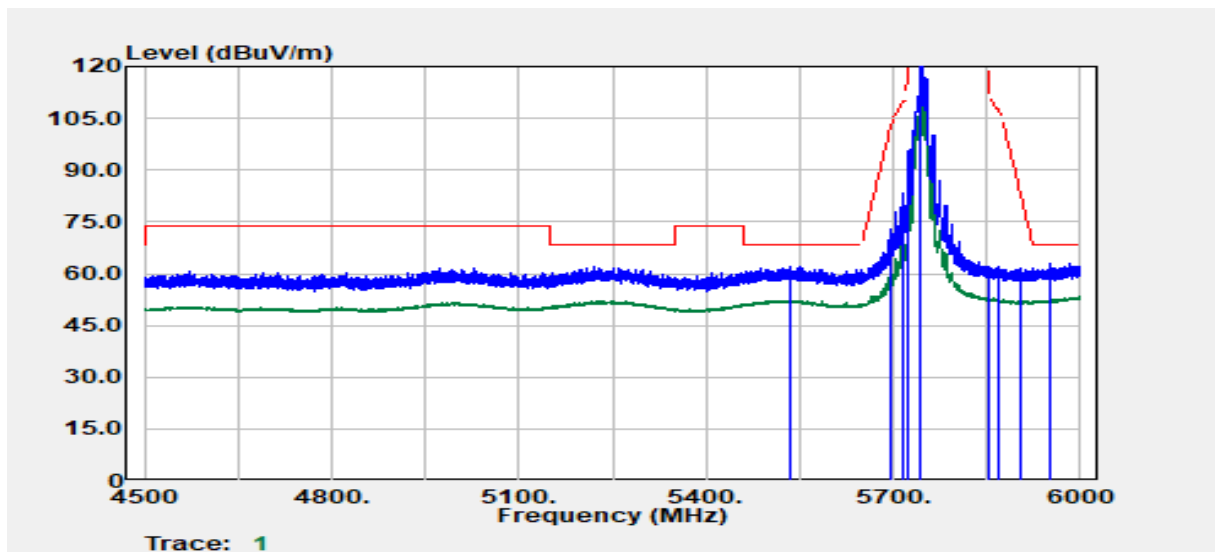


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5535.30	Peak	49.43	12.81	62.24	68.20	-5.96
5695.35	Peak	59.40	13.53	72.93	101.77	-28.84
5714.25	Peak	69.68	13.63	83.31	109.19	-25.88
5724.90	Peak	81.77	13.69	95.46	121.97	-26.52
5745.00	Peak	107.93	13.79	121.72	--	--
5745.00	Average	101.62	13.79	115.41	--	--
5854.80	Peak	48.07	14.02	62.09	111.26	-49.16
5866.95	Peak	48.03	14.02	62.06	107.45	-45.39
5904.75	Peak	47.44	14.04	61.49	83.15	-21.66
5950.65	Peak	48.77	14.16	62.93	68.20	-5.27

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

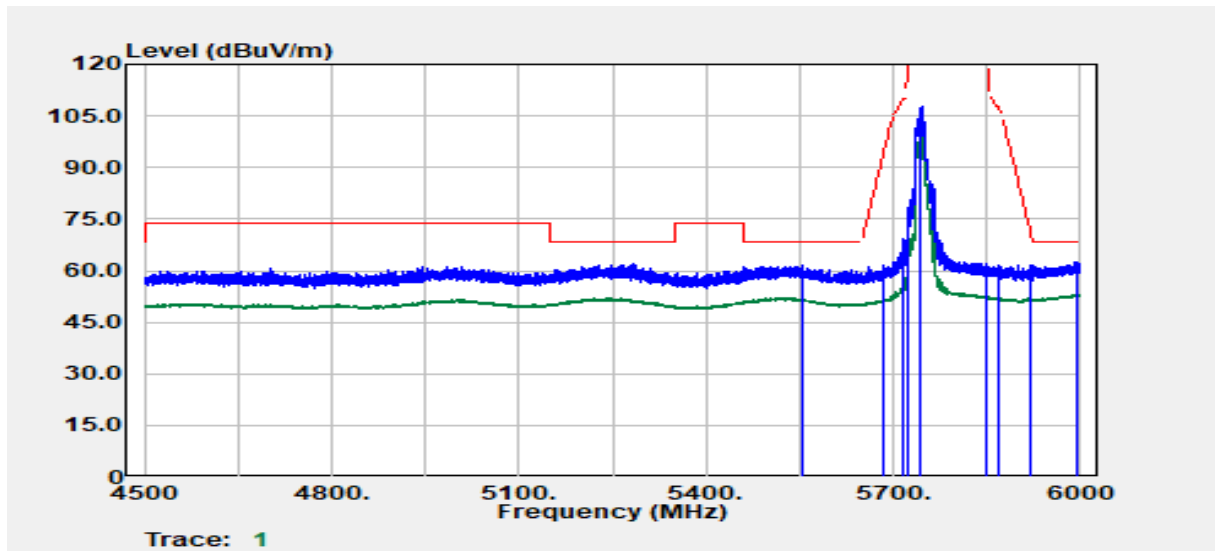


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5554.65	Peak	48.47	12.91	61.38	68.20	-6.82
5684.25	Peak	48.05	13.47	61.53	93.58	-32.05
5714.70	Peak	55.80	13.64	69.44	109.32	-39.88
5724.90	Peak	63.77	13.69	77.46	121.97	-44.51
5745.00	Peak	93.96	13.79	107.75	--	--
5745.00	Average	87.40	13.79	101.20	--	--
5850.90	Peak	47.39	14.02	61.41	120.15	-58.73
5868.30	Peak	47.48	14.02	61.50	107.07	-45.57
5920.95	Peak	47.45	14.08	61.54	71.19	-9.65
5994.30	Peak	48.48	14.15	62.63	68.20	-5.57

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

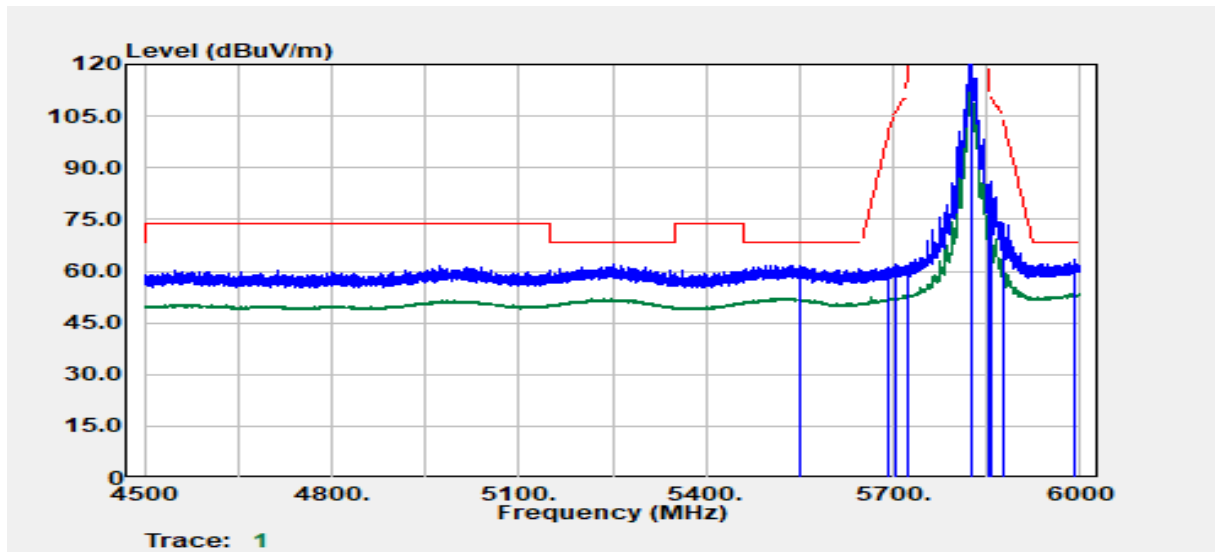

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5550.90	Peak	48.73	12.91	61.65	68.20	-6.55
5690.85	Peak	47.45	13.51	60.96	98.45	-37.49
5702.85	Peak	48.48	13.57	62.05	106.00	-43.95
5723.25	Peak	47.81	13.68	61.49	118.21	-56.72
5825.00	Peak	107.49	14.09	121.58	--	--
5825.00	Average	101.23	14.09	115.32	--	--
5854.80	Peak	71.06	14.02	85.08	111.26	-26.18
5855.85	Peak	71.92	14.02	85.94	110.56	-24.62
5875.50	Peak	59.96	14.03	73.98	104.83	-30.85
5991.00	Peak	49.36	14.15	63.51	68.20	-4.69

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

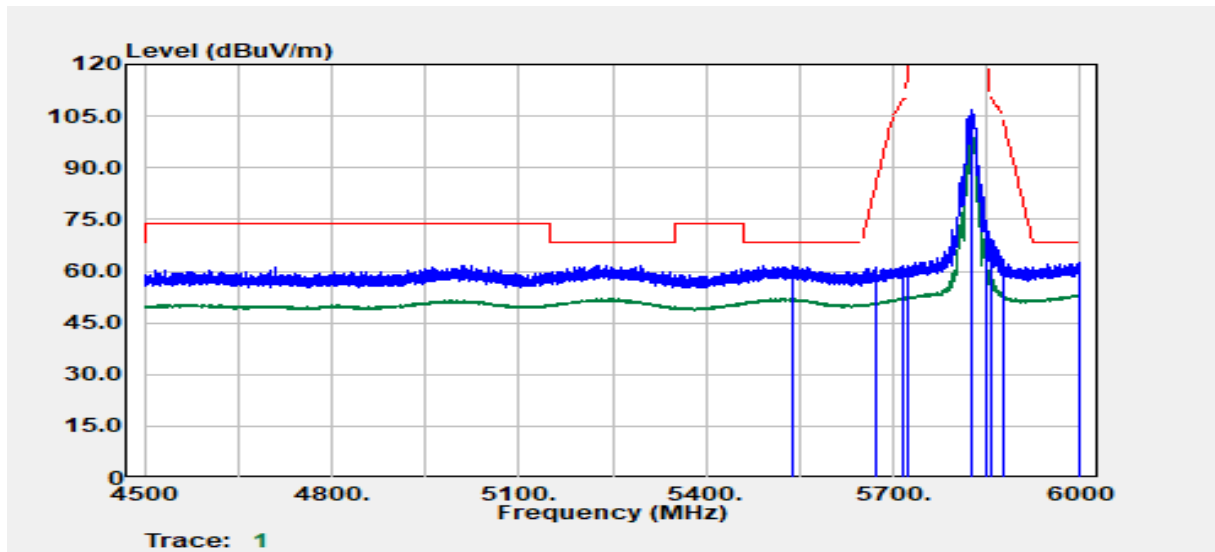


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5538.75	Peak	48.77	12.83	61.60	68.20	-6.60
5671.80	Peak	47.54	13.40	60.94	84.37	-23.43
5717.40	Peak	48.15	13.65	61.80	110.07	-48.27
5721.75	Peak	47.85	13.67	61.52	114.79	-53.27
5825.00	Peak	92.84	14.09	106.93	--	--
5825.00	Average	86.53	14.09	100.62	--	--
5850.15	Peak	59.30	14.02	73.32	121.86	-48.54
5857.05	Peak	55.18	14.02	69.20	110.23	-41.02
5876.70	Peak	49.40	14.03	63.42	103.94	-40.52
5999.25	Peak	48.19	14.15	62.34	68.20	-5.86

**Test Data for UNII-3**


**(4) MIMO**

Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

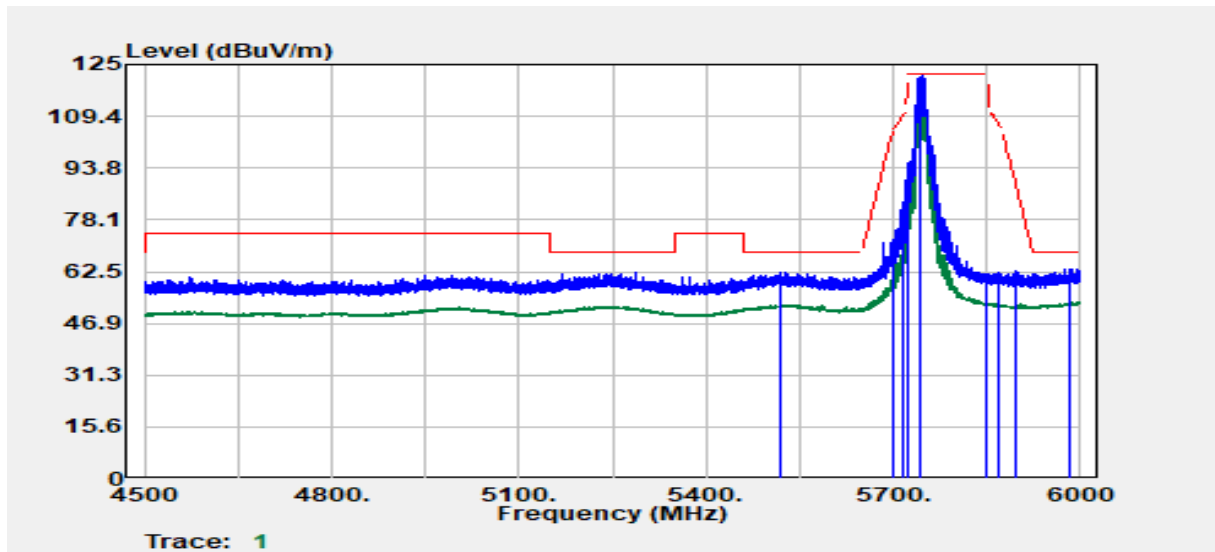


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5520.15	Peak	49.73	12.70	62.43	68.20	-5.77
5699.70	Peak	58.79	13.56	72.35	104.98	-32.63
5715.90	Peak	69.70	13.64	83.34	109.65	-26.31
5725.00	Peak	77.30	13.69	90.99	122.20	-31.21
5745.00	Peak	107.70	13.79	121.49	--	--
5745.00	Average	101.03	13.79	114.82	--	--
5850.00	Peak	47.56	14.02	61.58	122.20	-60.62
5868.00	Peak	48.19	14.02	62.22	107.16	-44.94
5895.15	Peak	48.67	14.03	62.70	90.25	-27.55
5982.90	Peak	49.11	14.15	63.26	68.20	-4.94

Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

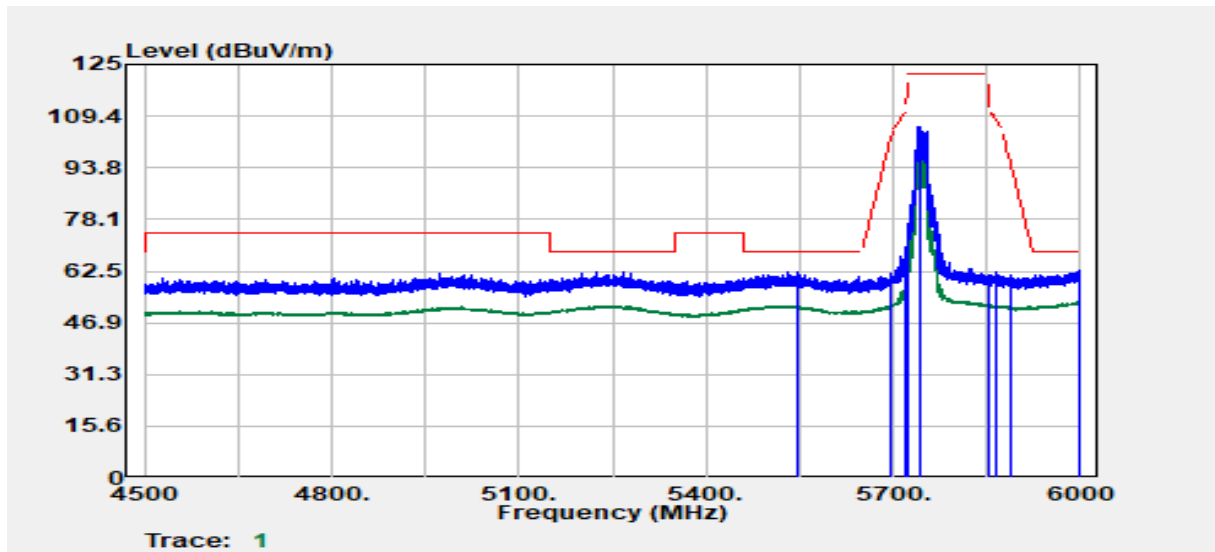


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5546.85	Peak	49.55	12.89	62.44	68.20	-5.76
5696.55	Peak	48.21	13.54	61.75	102.66	-40.91
5717.85	Peak	55.12	13.65	68.77	110.20	-41.43
5723.10	Peak	63.10	13.68	76.78	117.87	-41.09
5745.00	Peak	92.50	13.79	106.29	--	--
5745.00	Average	85.50	13.79	99.29	--	--
5854.05	Peak	47.48	14.02	61.50	112.97	-51.46
5866.50	Peak	48.39	14.02	62.41	107.58	-45.17
5889.45	Peak	47.14	14.03	61.17	94.47	-33.31
5999.55	Peak	48.49	14.15	62.64	68.20	-5.56

Test Mode	IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

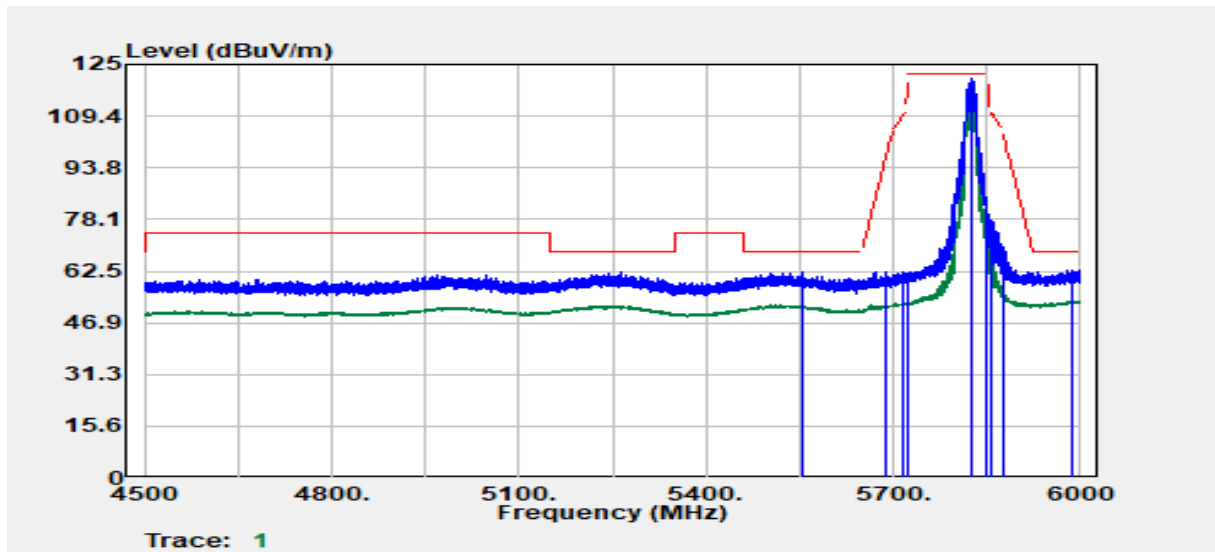

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5554.95	Peak	49.43	12.91	62.34	68.20	-5.86
5689.20	Peak	48.64	13.50	62.14	97.24	-35.10
5714.40	Peak	48.62	13.63	62.26	109.23	-46.98
5722.95	Peak	48.18	13.68	61.85	117.53	-55.67
5825.00	Peak	106.49	14.09	120.58	--	--
5825.00	Average	100.45	14.09	114.54	--	--
5850.00	Peak	71.03	14.02	85.05	122.20	-37.15
5855.55	Peak	64.02	14.02	78.04	110.65	-32.60
5875.50	Peak	55.99	14.03	70.02	104.83	-34.81
5985.30	Peak	48.65	14.15	62.80	68.20	-5.40


Test Mode	IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

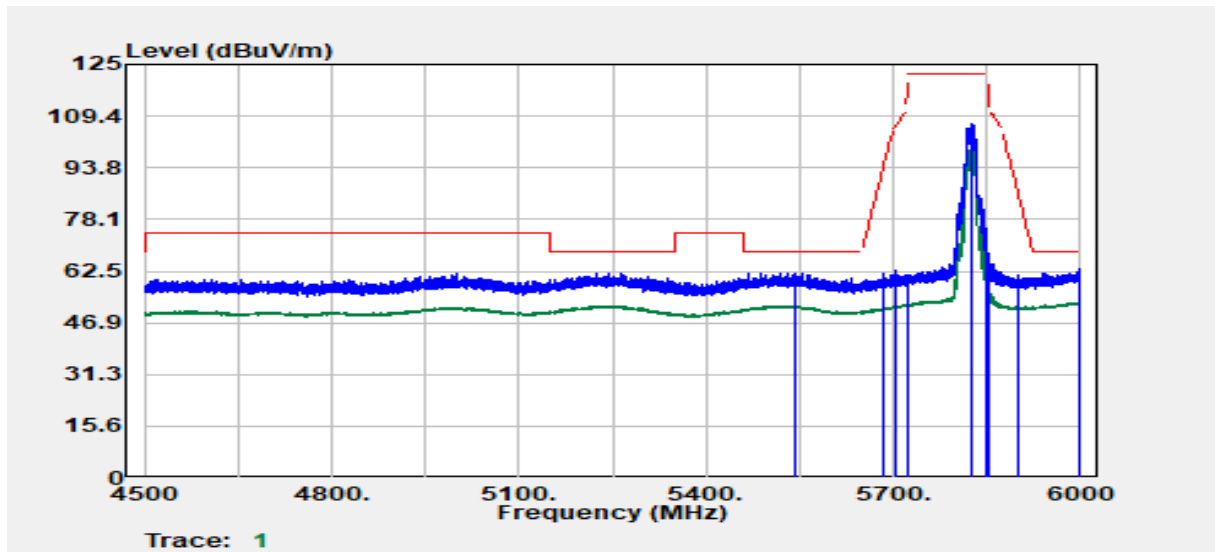

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5543.70	Peak	48.98	12.87	61.84	68.20	-6.36
5683.05	Peak	48.17	13.47	61.64	92.69	-31.06
5702.40	Peak	49.04	13.57	62.61	105.87	-43.26
5723.55	Peak	47.66	13.68	61.34	118.90	-57.56
5825.00	Peak	93.18	14.09	107.27	--	--
5825.00	Average	87.02	14.09	101.11	--	--
5850.15	Peak	56.24	14.02	70.26	121.86	-51.60
5854.95	Peak	50.58	14.02	64.60	110.91	-46.31
5901.90	Peak	47.36	14.03	61.40	85.26	-23.86
5998.50	Peak	48.84	14.15	62.99	68.20	-5.21




Test Mode	IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

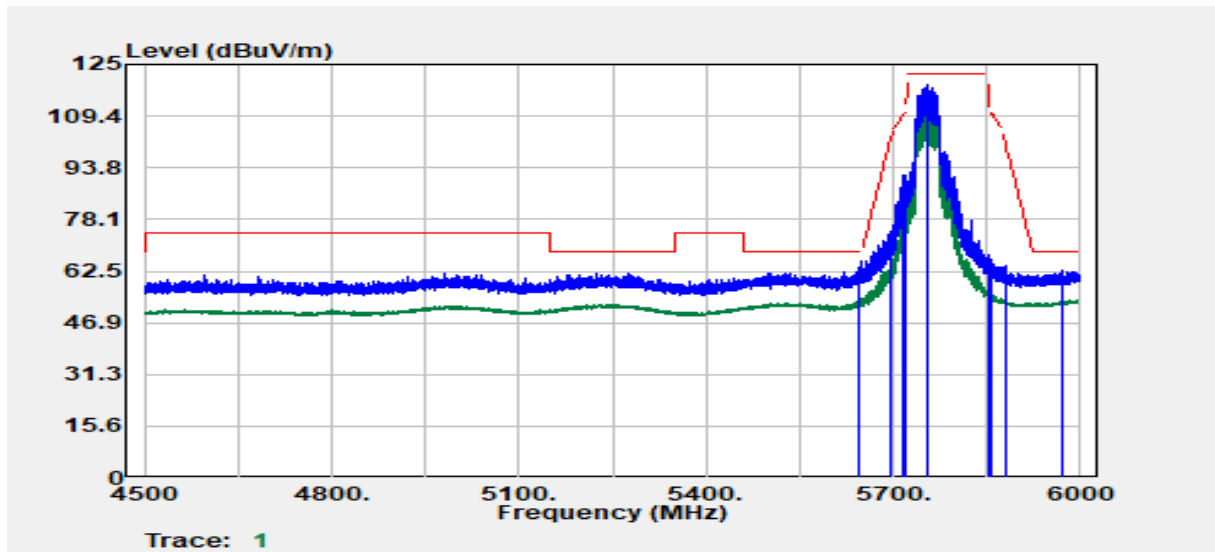


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5646.15	Peak	50.52	13.25	63.77	68.20	-4.43
5696.10	Peak	61.07	13.54	74.60	102.33	-27.72
5716.20	Peak	78.10	13.64	91.74	109.74	-18.00
5721.30	Peak	77.66	13.67	91.33	113.77	-22.44
5755.00	Peak	105.00	13.85	118.86	--	--
5755.00	Average	98.61	13.85	112.47	--	--
5852.10	Peak	53.59	14.02	67.61	117.41	-49.80
5856.00	Peak	52.17	14.02	66.19	110.52	-44.33
5878.95	Peak	49.95	14.03	63.97	102.27	-38.29
5969.70	Peak	48.37	14.16	62.52	68.20	-5.68

Test Mode	IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

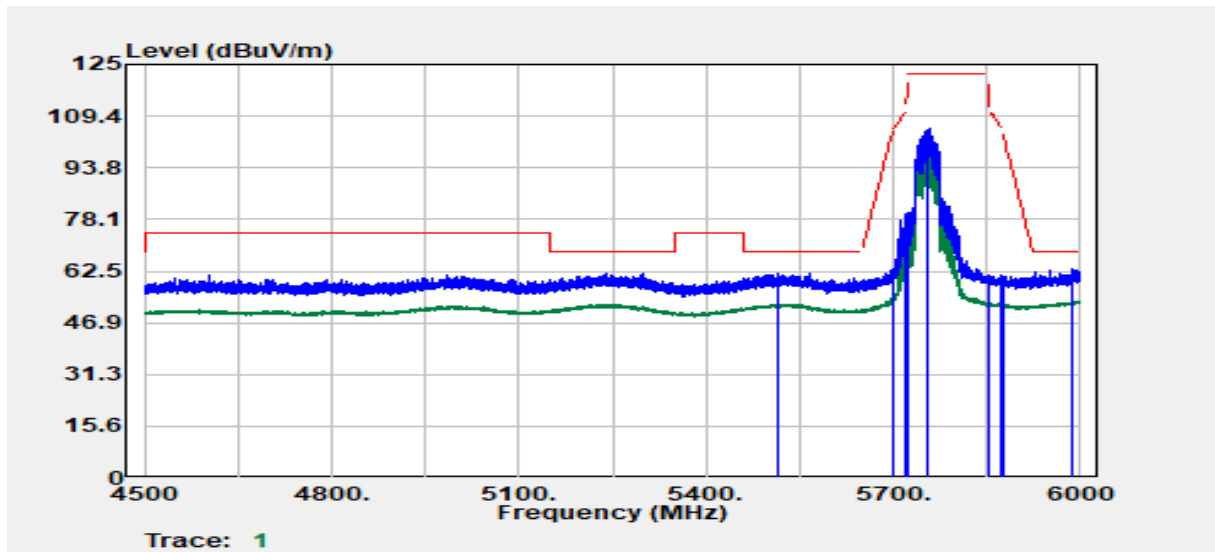


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5516.25	Peak	49.15	12.67	61.82	68.20	-6.38
5698.80	Peak	49.81	13.55	63.37	104.32	-40.95
5718.45	Peak	66.24	13.66	79.89	110.37	-30.47
5723.25	Peak	66.62	13.68	80.30	118.21	-37.91
5755.00	Peak	91.97	13.85	105.83	--	--
5755.00	Average	85.04	13.85	98.90	--	--
5851.95	Peak	47.48	14.02	61.50	117.75	-56.25
5872.95	Peak	47.36	14.02	61.38	105.77	-44.39
5875.80	Peak	47.03	14.03	61.05	104.61	-43.55
5986.65	Peak	49.07	14.15	63.23	68.20	-4.97

Test Mode	IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

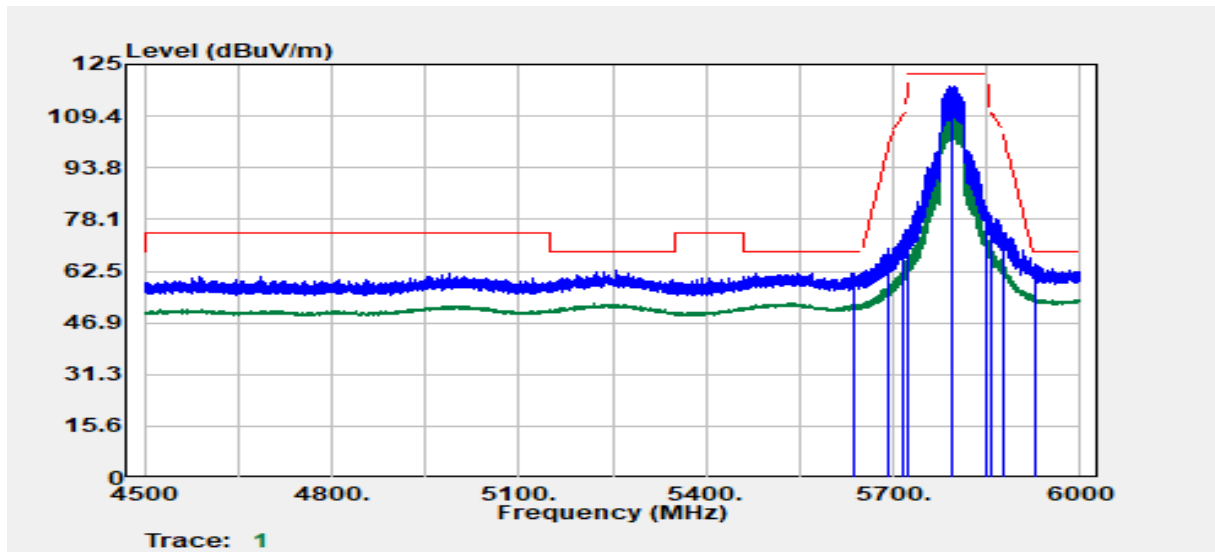

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5636.25	Peak	48.83	13.16	61.98	68.20	-6.22
5690.70	Peak	55.79	13.51	69.29	98.34	-29.05
5716.35	Peak	60.13	13.65	73.78	109.78	-36.00
5725.00	Peak	61.35	13.69	75.04	122.20	-47.16
5795.00	Peak	104.45	14.13	118.57	--	--
5795.00	Average	98.01	14.13	112.13	--	--
5850.60	Peak	67.92	14.02	81.94	120.83	-38.89
5856.30	Peak	65.38	14.02	79.40	110.44	-31.03
5876.10	Peak	60.09	14.03	74.11	104.38	-30.27
5926.65	Peak	50.60	14.10	64.70	68.20	-3.50


Test Mode	IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

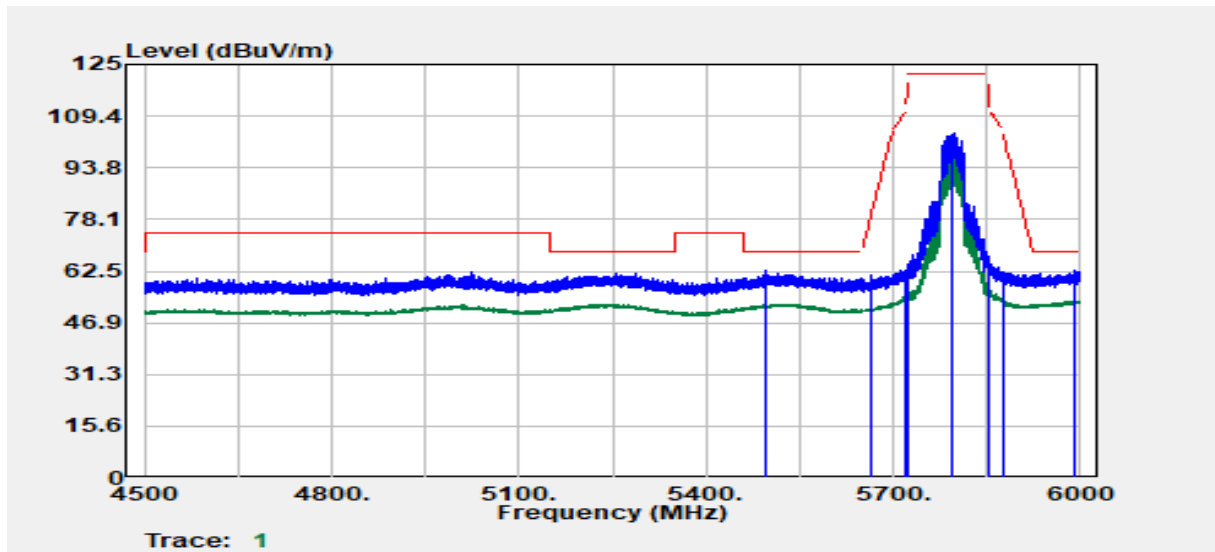

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5494.05	Peak	50.12	12.53	62.65	68.20	-5.55
5664.00	Peak	48.20	13.36	61.56	78.59	-17.04
5718.15	Peak	49.10	13.65	62.76	110.28	-47.53
5723.10	Peak	50.94	13.68	64.62	117.87	-53.25
5795.00	Peak	90.30	14.13	104.43	--	--
5795.00	Average	83.77	14.13	97.90	--	--
5853.15	Peak	53.06	14.02	67.08	115.02	-47.94
5854.95	Peak	51.24	14.02	65.26	110.91	-45.65
5874.90	Peak	48.43	14.02	62.46	105.23	-42.77
5989.35	Peak	48.39	14.15	62.54	68.20	-5.66


Report No.: TMWK2304001001KR

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

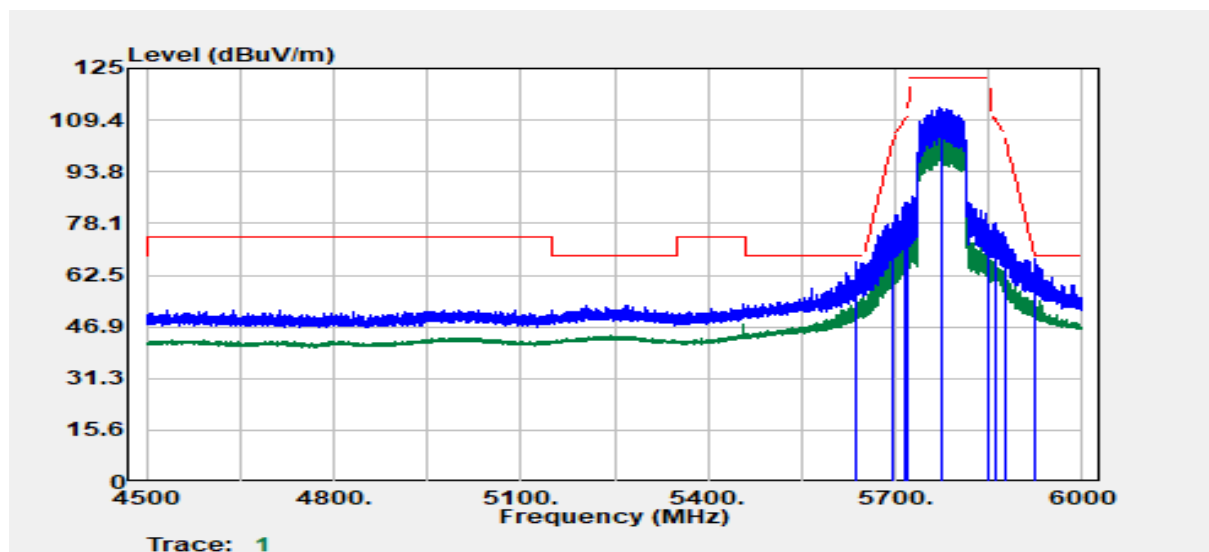


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5635.35	Peak	53.34	13.15	66.49	68.20	-1.71
5695.80	Peak	64.72	13.54	78.26	102.10	-23.85
5715.75	Peak	70.63	13.64	84.27	109.61	-25.34
5720.40	Peak	70.55	13.67	84.21	111.71	-27.50
5775.00	Peak	99.09	13.99	113.08	--	--
5775.00	Average	92.87	13.99	106.86	--	--
5851.20	Peak	63.96	14.02	77.98	119.46	-41.48
5860.50	Peak	64.20	14.02	78.23	109.26	-31.03
5876.10	Peak	60.09	14.03	74.11	104.38	-30.27
5925.60	Peak	53.29	14.10	67.39	68.20	-0.81

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

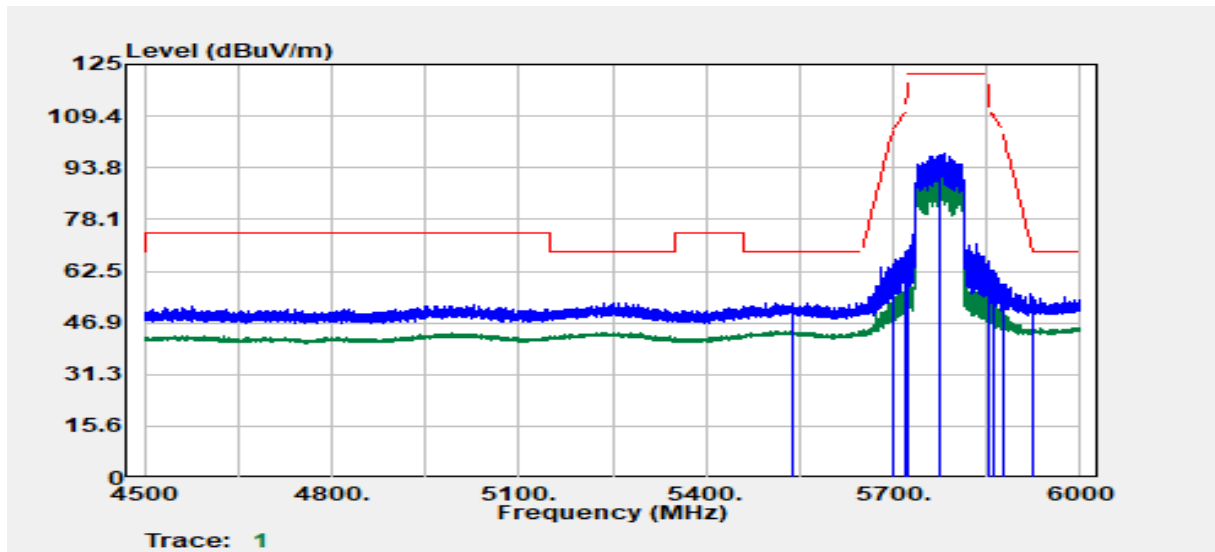


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5538.75	Peak	40.21	12.83	53.04	68.20	-15.16
5699.70	Peak	51.01	13.56	64.57	104.98	-40.41
5718.90	Peak	54.96	13.66	68.62	110.49	-41.87
5724.30	Peak	55.30	13.69	68.98	120.60	-51.62
5775.00	Peak	83.97	13.99	97.96	--	--
5775.00	Average	77.02	13.99	91.01	--	--
5854.65	Peak	51.51	14.02	65.53	111.60	-46.07
5860.65	Peak	48.89	14.02	62.91	109.22	-46.30
5876.25	Peak	44.48	14.03	58.51	104.27	-45.76
5925.15	Peak	40.86	14.10	54.95	68.20	-13.25

Test Mode	IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

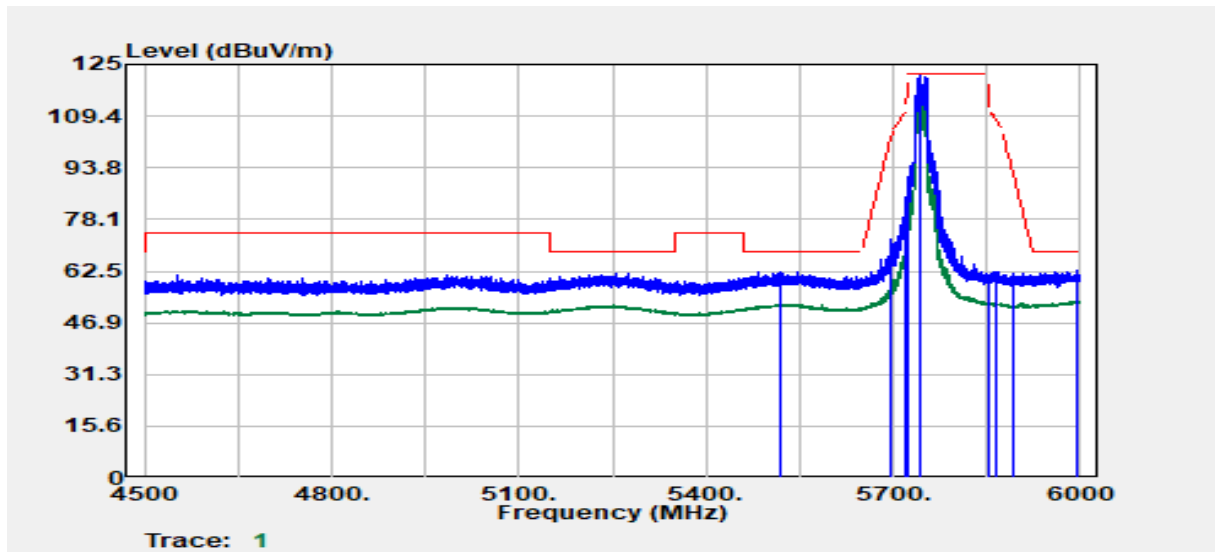

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5520.00	Peak	49.77	12.70	62.47	68.20	-5.73
5697.00	Peak	58.65	13.54	72.19	102.99	-30.79
5719.50	Peak	71.37	13.66	85.03	110.66	-25.63
5724.00	Peak	77.25	13.68	90.93	119.92	-28.99
5745.00	Peak	107.91	13.79	121.71	--	--
5745.00	Average	100.22	13.79	114.01	--	--
5851.95	Peak	47.27	14.02	61.29	117.75	-56.47
5864.70	Peak	48.43	14.02	62.45	108.08	-45.63
5892.75	Peak	47.99	14.03	62.02	92.03	-30.01
5993.55	Peak	48.67	14.15	62.82	68.20	-5.38


Test Mode	IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

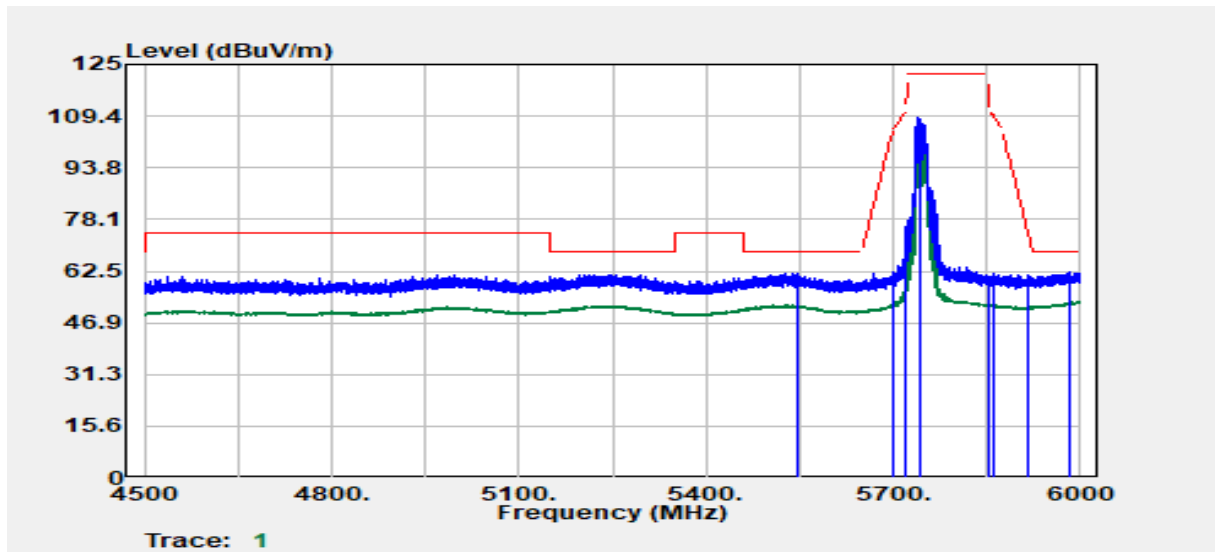

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5545.35	Peak	48.80	12.88	61.68	68.20	-6.52
5699.85	Peak	48.79	13.56	62.35	105.09	-42.74
5719.80	Peak	55.25	13.66	68.91	110.74	-41.83
5720.55	Peak	62.41	13.67	76.07	112.05	-35.98
5745.00	Peak	95.02	13.79	108.81	--	--
5745.00	Average	86.28	13.79	100.07	--	--
5853.45	Peak	46.44	14.02	60.46	114.33	-53.87
5859.45	Peak	47.94	14.02	61.96	109.55	-47.59
5916.30	Peak	47.42	14.07	61.49	74.62	-13.13
5982.45	Peak	48.00	14.15	62.16	68.20	-6.04




Test Mode	IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 18, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

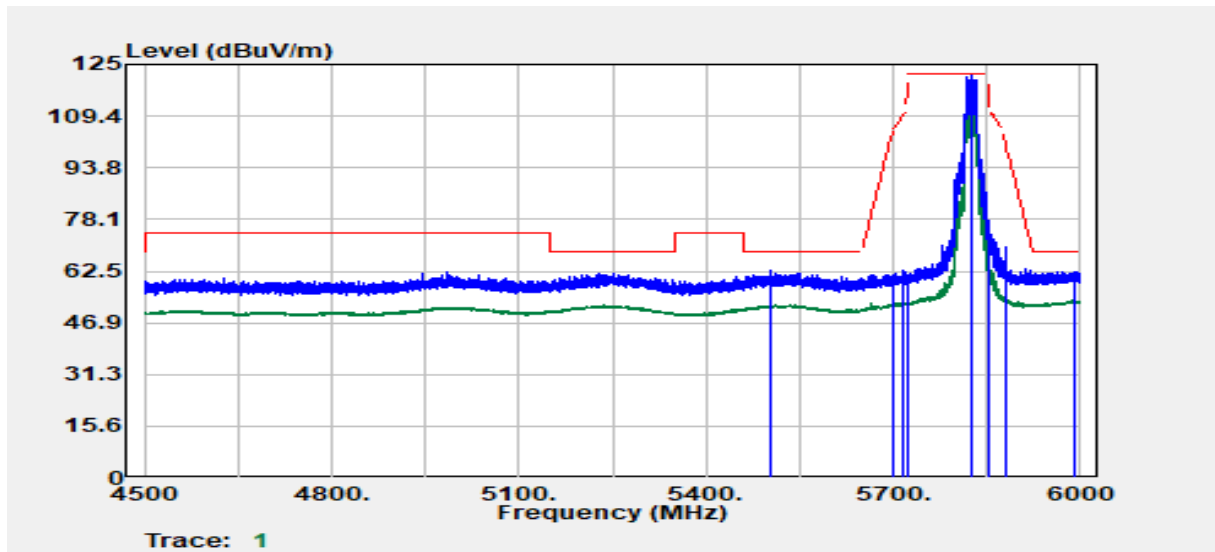


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5505.00	Peak	50.35	12.59	62.93	68.20	-5.27
5698.05	Peak	47.78	13.55	61.33	103.76	-42.44
5714.55	Peak	49.09	13.64	62.72	109.28	-46.56
5725.00	Peak	47.60	13.69	61.29	122.20	-60.91
5825.00	Peak	107.70	14.09	121.79	--	--
5825.00	Average	99.11	14.09	113.20	--	--
5851.35	Peak	63.70	14.02	77.72	119.12	-41.40
5854.95	Peak	60.56	14.02	74.58	110.91	-36.34
5878.95	Peak	55.84	14.03	69.86	102.27	-32.40
5989.50	Peak	48.33	14.15	62.48	68.20	-5.72

Test Mode	IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	24.5(°C)/ 57%RH
Test Item	Band Edge	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

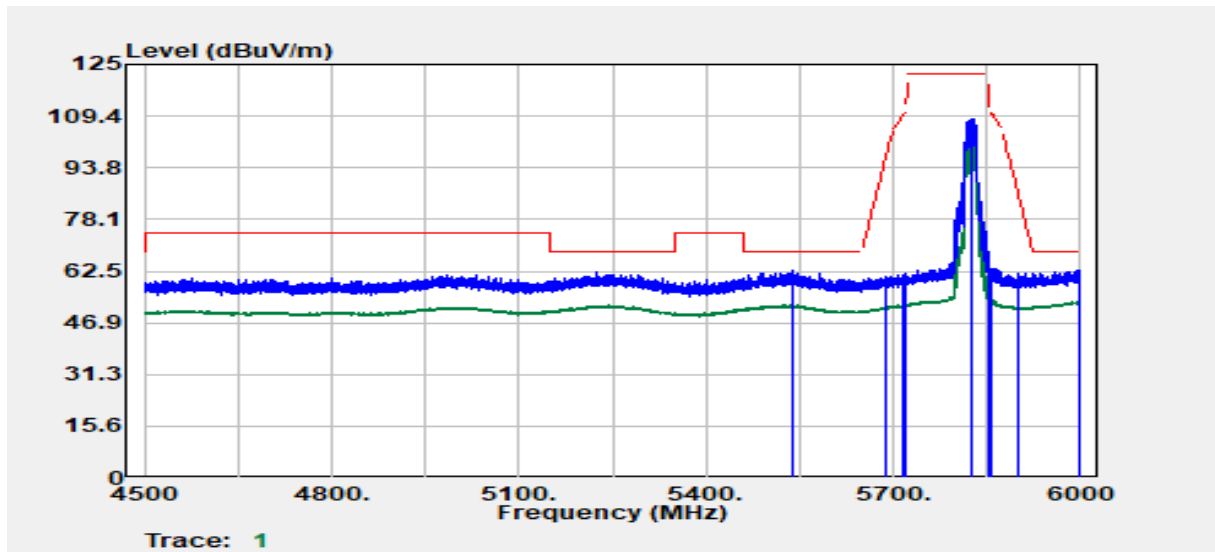


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5538.75	Peak	49.80	12.83	62.64	68.20	-5.56
5690.10	Peak	47.32	13.50	60.82	97.90	-37.08
5715.90	Peak	47.65	13.64	61.29	109.65	-48.36
5720.85	Peak	47.91	13.67	61.58	112.74	-51.16
5825.00	Peak	94.55	14.09	108.64	--	--
5825.00	Average	86.76	14.09	100.85	--	--
5851.65	Peak	54.58	14.02	68.60	118.44	-49.84
5859.00	Peak	49.38	14.02	63.41	109.68	-46.27
5898.75	Peak	47.89	14.03	61.92	87.59	-25.66
5999.25	Peak	48.58	14.15	62.73	68.20	-5.47

Test Mode	IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

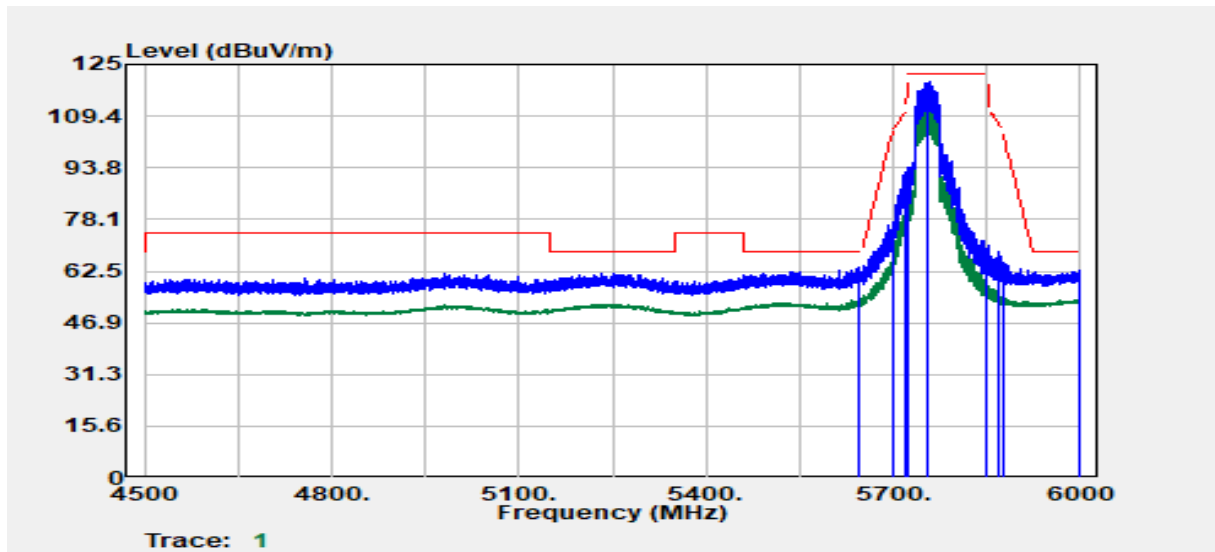


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5644.65	Peak	50.58	13.23	63.81	68.20	-4.39
5699.70	Peak	63.73	13.56	77.29	104.98	-27.69
5718.90	Peak	78.97	13.66	92.63	110.49	-17.86
5724.90	Peak	80.32	13.69	94.01	121.97	-27.97
5755.00	Peak	106.13	13.85	119.99	--	--
5755.00	Average	98.26	13.85	112.12	--	--
5850.30	Peak	54.98	14.02	69.00	121.52	-52.52
5869.05	Peak	54.33	14.02	68.36	106.86	-38.51
5875.05	Peak	51.10	14.03	65.13	105.16	-40.03
5998.50	Peak	48.38	14.15	62.53	68.20	-5.67

Test Mode	IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

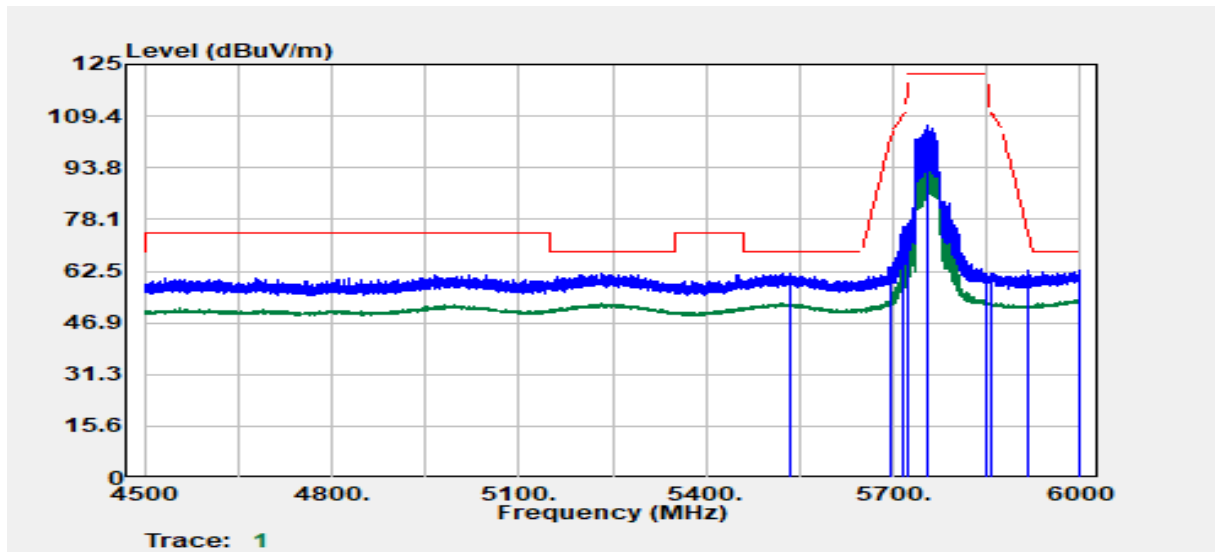


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5535.90	Peak	49.02	12.81	61.83	68.20	-6.37
5696.40	Peak	50.05	13.54	63.59	102.55	-38.95
5715.90	Peak	62.28	13.64	75.93	109.65	-33.73
5722.05	Peak	61.74	13.67	75.41	115.48	-40.06
5755.00	Peak	92.66	13.85	106.52	--	--
5755.00	Average	84.54	13.85	98.39	--	--
5850.45	Peak	47.74	14.02	61.76	121.17	-59.41
5859.00	Peak	47.74	14.02	61.76	109.68	-47.92
5917.50	Peak	48.43	14.08	62.50	73.73	-11.23
5996.70	Peak	48.74	14.15	62.89	68.20	-5.31

Test Mode	IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

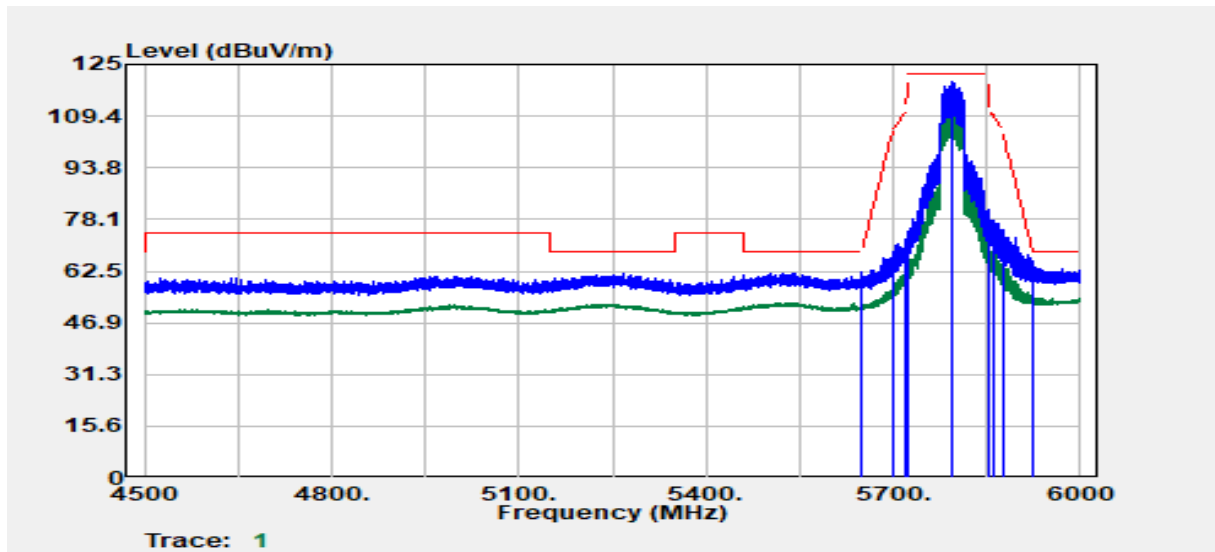


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5649.30	Peak	48.84	13.27	62.12	68.20	-6.08
5700.00	Peak	54.62	13.56	68.18	105.20	-37.02
5719.50	Peak	57.86	13.66	71.53	110.66	-39.13
5724.45	Peak	60.79	13.69	74.47	120.95	-46.47
5795.00	Peak	105.56	14.13	119.68	--	--
5795.00	Average	97.90	14.13	112.02	--	--
5854.35	Peak	67.28	14.02	81.30	112.28	-30.98
5859.60	Peak	63.95	14.02	77.97	109.51	-31.54
5875.05	Peak	61.02	14.03	75.04	105.16	-30.12
5925.30	Peak	50.26	14.10	64.36	68.20	-3.84

Test Mode	IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

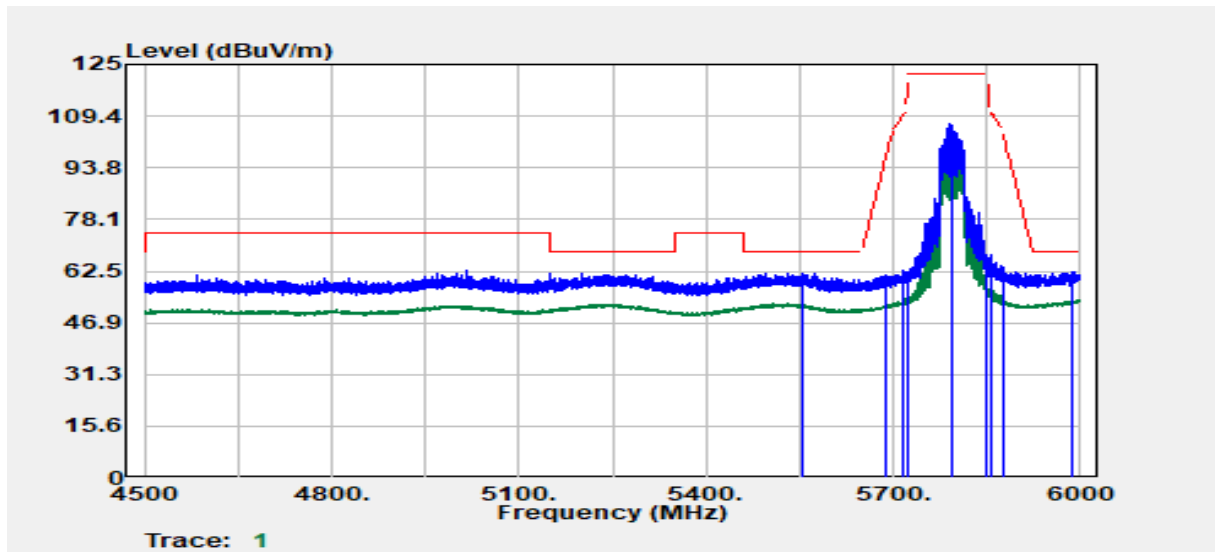


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5553.30	Peak	48.97	12.91	61.88	68.20	-6.32
5687.85	Peak	47.60	13.49	61.09	96.24	-35.15
5715.15	Peak	48.95	13.64	62.59	109.44	-46.86
5724.90	Peak	48.50	13.69	62.19	121.97	-59.78
5795.00	Peak	92.75	14.13	106.88	--	--
5795.00	Average	84.11	14.13	98.23	--	--
5851.20	Peak	53.45	14.02	67.47	119.46	-52.00
5856.00	Peak	53.47	14.02	67.49	110.52	-43.03
5875.35	Peak	49.77	14.03	63.80	104.94	-41.14
5987.10	Peak	48.27	14.15	62.42	68.20	-5.78

Test Mode	IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

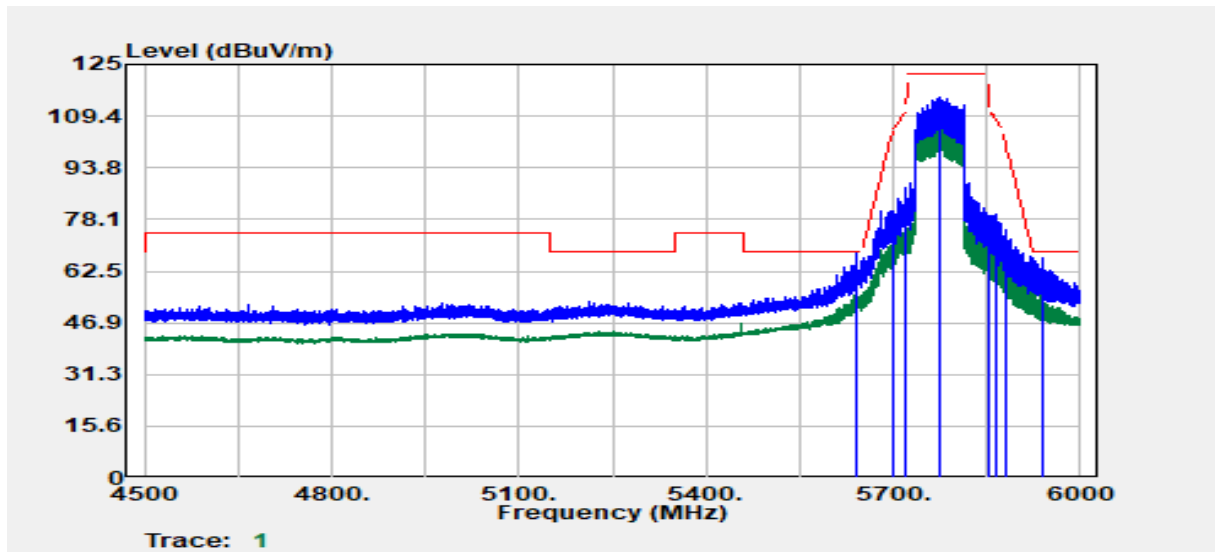

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5640.15	Peak	54.52	13.19	67.71	68.20	-0.49
5698.80	Peak	67.27	13.55	80.83	104.32	-23.49
5718.75	Peak	72.06	13.66	85.72	110.45	-24.73
5720.55	Peak	74.10	13.67	87.77	112.05	-24.28
5775.00	Peak	101.20	13.99	115.19	--	--
5775.00	Average	93.24	13.99	107.23	--	--
5854.05	Peak	65.38	14.02	79.40	112.97	-33.56
5863.95	Peak	65.90	14.02	79.92	108.29	-28.37
5878.80	Peak	61.07	14.03	75.09	102.38	-27.29
5939.25	Peak	52.21	14.13	66.35	68.20	-1.85

Test Mode	IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	24.5(°C) / 57%RH
Test Item	Band Edge	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

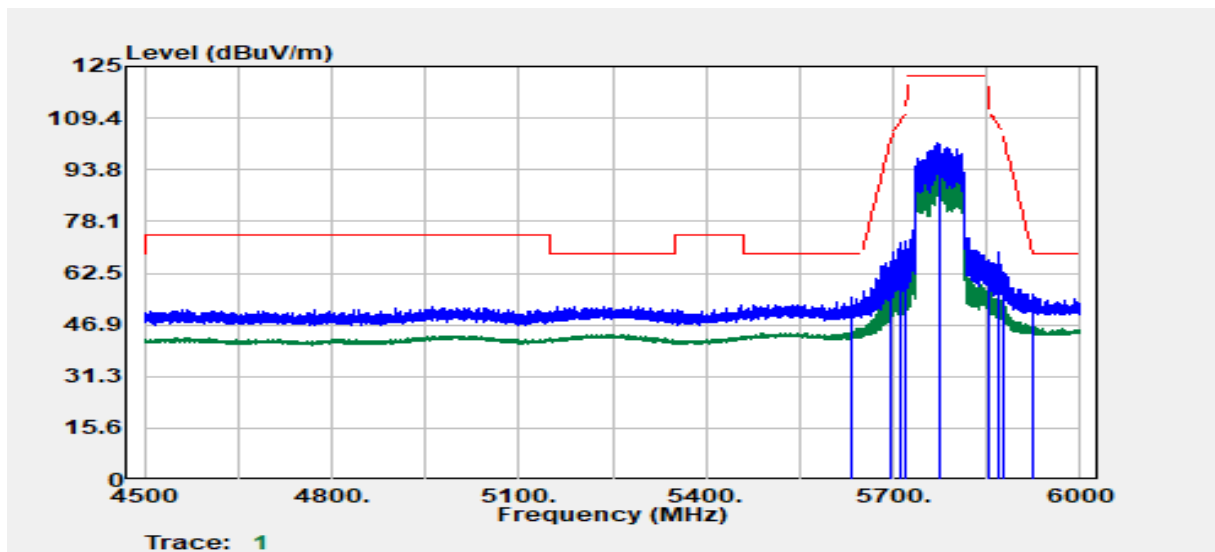


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5631.60	Peak	41.91	13.11	55.03	68.20	-13.17
5695.80	Peak	52.47	13.54	66.01	102.10	-36.10
5711.25	Peak	58.13	13.62	71.75	108.35	-36.60
5720.70	Peak	58.68	13.67	72.35	112.40	-40.05
5775.00	Peak	87.72	13.99	101.71	--	--
5775.00	Average	79.26	13.99	93.25	--	--
5851.50	Peak	52.52	14.02	66.54	118.78	-52.23
5870.85	Peak	54.76	14.02	68.78	106.36	-37.58
5875.65	Peak	48.94	14.03	62.97	104.72	-41.75
5925.75	Peak	42.01	14.10	56.11	68.20	-12.09



**Test Data for UNII-3**


**(5) Co-Location:**

Test Mode	IEEE 802.11ax HE160 (5250 MHz)+ IEEE 802.11b (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

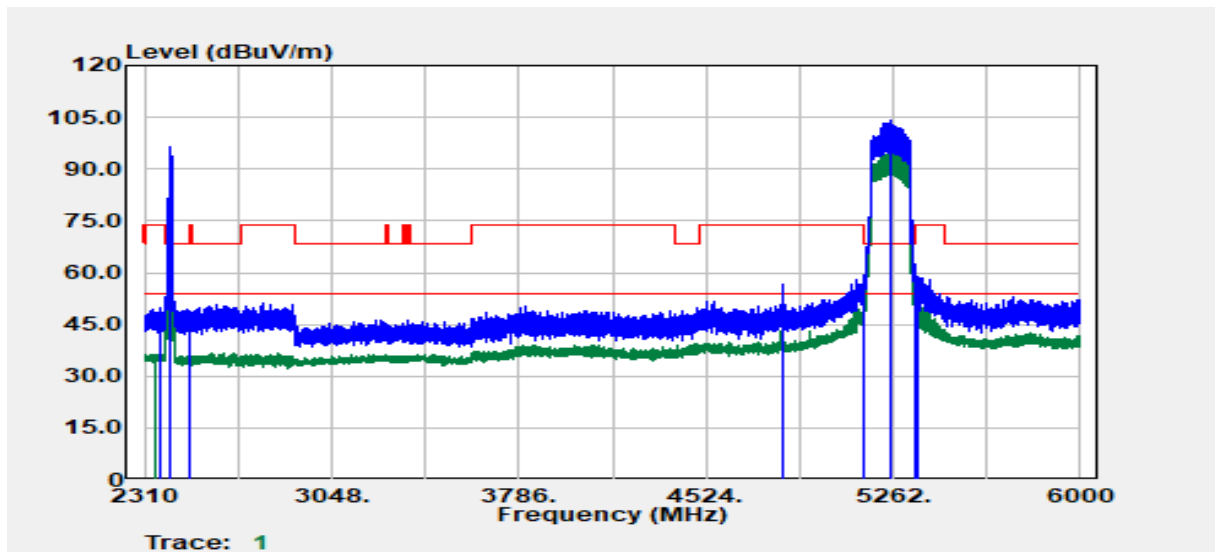


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2369.47	Peak	44.98	4.78	49.76	74.00	-24.24
2369.47	Average	31.59	4.78	36.37	54.00	-17.63
2412.00	Peak	91.45	4.84	96.29	--	--
2412.00	Average	89.55	4.84	94.39	--	--
2489.48	Peak	43.86	5.27	49.13	74.00	-24.87
2489.48	Average	30.68	5.27	35.95	54.00	-18.05
4824.12	Average	43.24	10.29	53.52	54.00	-0.48
5144.95	Peak	47.23	12.15	59.38	74.00	-14.62
5250.00	Peak	92.06	12.04	104.10	--	--
5250.00	Average	82.94	12.04	94.98	--	--
5353.36	Peak	47.30	12.14	59.44	74.00	-14.56
5354.36	Average	39.26	12.15	51.41	54.00	-2.59

Test Mode	IEEE 802.11ax HE160 (5250 MHz)+ IEEE 802.11b (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

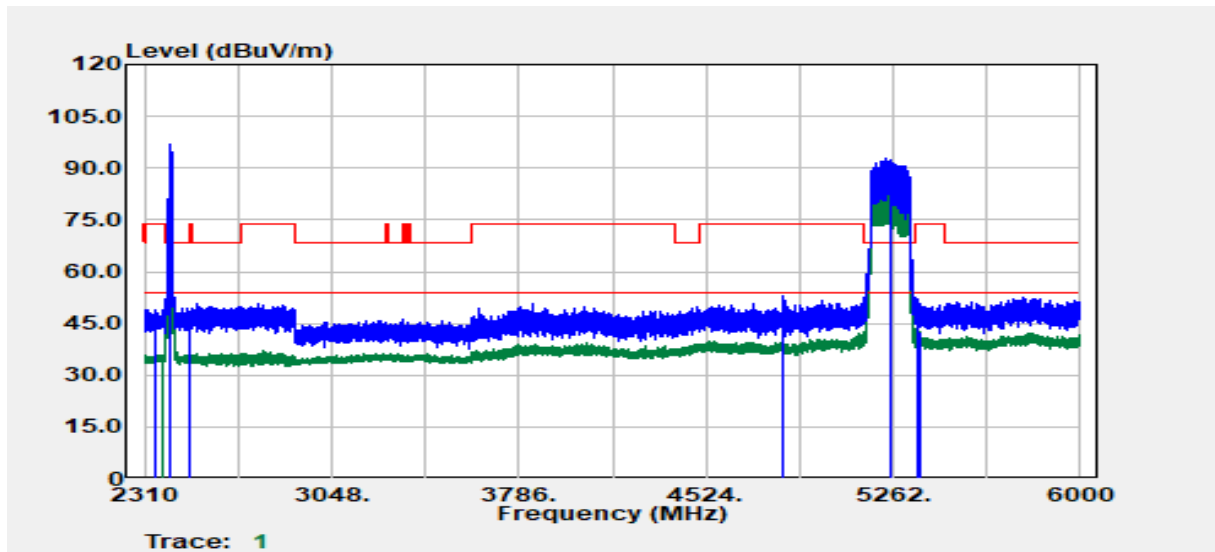


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2352.24	Peak	44.03	4.94	48.97	74.00	-25.03
2352.24	Average	31.00	4.94	35.94	54.00	-18.06
2412.00	Peak	91.84	4.84	96.68	--	--
2412.00	Average	89.90	4.84	94.74	--	--
2487.12	Peak	42.34	5.27	47.60	74.00	-26.40
2487.12	Average	30.69	5.27	35.96	54.00	-18.04
4824.12	Peak	42.51	10.29	52.80	74.00	-21.20
4824.12	Average	36.58	10.29	46.87	54.00	-7.13
5250.00	Peak	80.65	12.04	92.69	--	--
5250.00	Average	72.64	12.04	84.68	--	--
5356.36	Peak	39.88	12.15	52.03	74.00	-21.97
5371.16	Average	30.14	12.21	42.35	54.00	-11.65

Test Mode	IEEE 802.11a (Band 3-5700 MHz)+ IEEE 802.11b (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

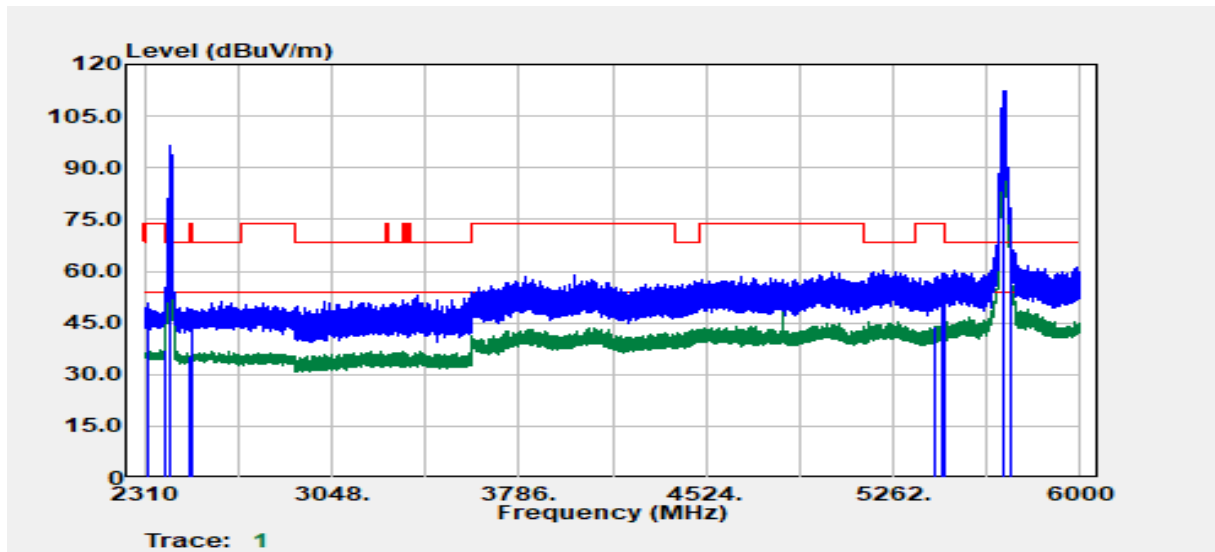


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2323.60	Peak	46.21	4.73	50.94	74.00	-23.06
2387.23	Average	32.35	4.95	37.30	54.00	-16.70
2412.00	Peak	91.39	4.84	96.23	--	--
2412.00	Average	89.47	4.84	94.30	--	--
2490.46	Average	30.17	5.27	35.44	54.00	-18.56
2497.46	Peak	43.58	5.28	48.86	74.00	-25.14
5430.28	Average	31.79	12.35	44.14	54.00	-9.86
5454.38	Peak	46.82	12.39	59.21	74.00	-14.79
5463.08	Peak	46.97	12.42	59.40	68.20	-8.80
5700.00	Peak	98.93	13.56	112.49	--	--
5700.00	Average	92.56	13.56	106.12	--	--
5725.00	Peak	50.70	13.69	64.39	68.20	-3.81

Test Mode	IEEE 802.11a (Band 3-5700 MHz)+ IEEE 802.11b (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

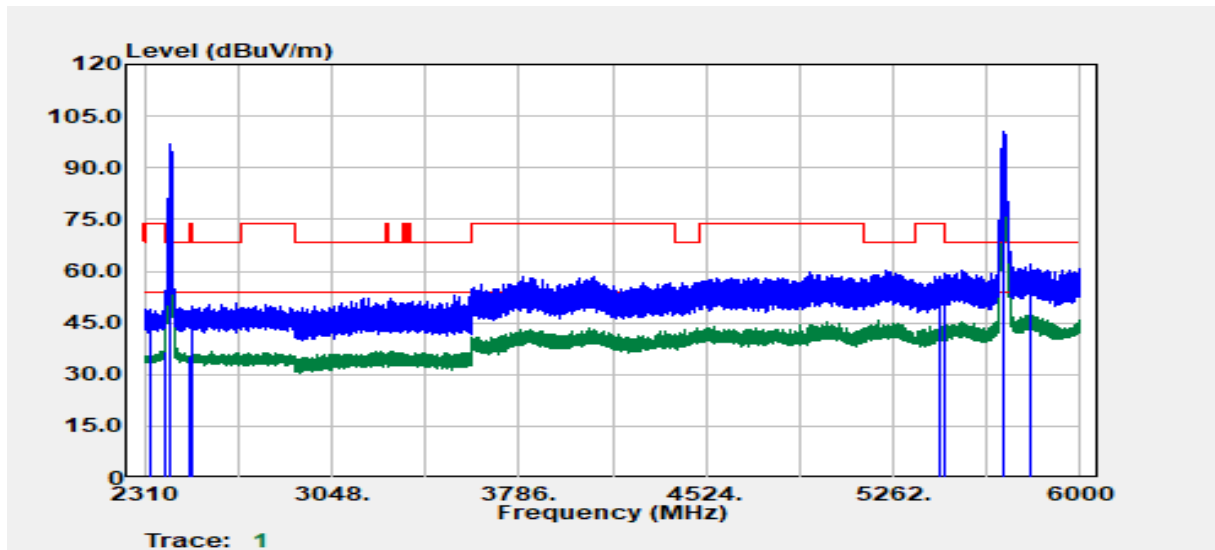


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2336.81	Peak	43.89	4.81	48.70	74.00	-25.30
2388.43	Average	31.89	4.96	36.85	54.00	-17.15
2412.00	Peak	92.11	4.84	96.95	--	--
2412.00	Average	90.10	4.84	94.93	--	--
2487.66	Average	30.01	5.27	35.27	54.00	-18.73
2495.26	Peak	44.33	5.28	49.61	74.00	-24.39
5447.08	Peak	46.07	12.37	58.44	74.00	-15.56
5449.48	Average	32.29	12.37	44.66	54.00	-9.34
5469.38	Peak	46.82	12.44	59.26	68.20	-8.94
5700.00	Peak	86.91	13.56	100.47	--	--
5700.00	Average	80.35	13.56	93.91	--	--
5803.09	Peak	48.03	14.15	62.18	68.20	-6.02

Test Mode	IEEE 802.11ax HE20 (5825 MHz)+ IEEE 802.11b (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

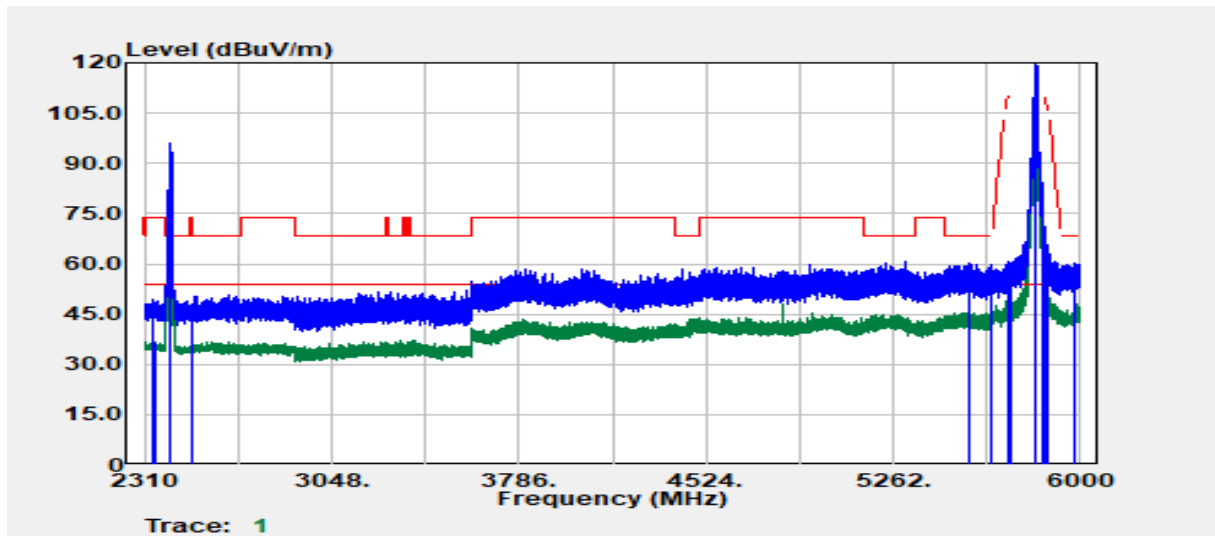


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2338.21	Peak	44.46	4.83	49.29	74.00	-24.71
2349.81	Average	31.56	4.96	36.52	54.00	-17.48
2412.00	Peak	91.05	4.84	95.88	--	--
2412.00	Average	89.17	4.84	94.00	--	--
2495.46	Average	30.72	5.28	35.99	54.00	-18.01
2496.06	Peak	42.92	5.28	48.20	74.00	-25.80
5566.11	Peak	47.24	12.89	60.13	68.20	-8.07
5650.99	Peak	46.38	13.29	59.66	68.93	-9.27
5717.99	Peak	47.17	13.65	60.83	110.24	-49.41
5722.86	Peak	46.63	13.68	60.31	117.33	-57.02
5825.00	Peak	105.47	14.09	119.56	--	--
5825.00	Average	98.08	14.09	112.17	--	--
5850.00	Peak	62.93	14.02	76.95	122.20	-45.25
5858.62	Peak	56.89	14.02	70.91	109.79	-38.87
5875.00	Peak	50.59	14.03	64.61	105.20	-40.59
5972.87	Peak	46.12	14.16	60.28	68.20	-7.92

Test Mode	IEEE 802.11ax HE20 (5825 MHz)+ IEEE 802.11b (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

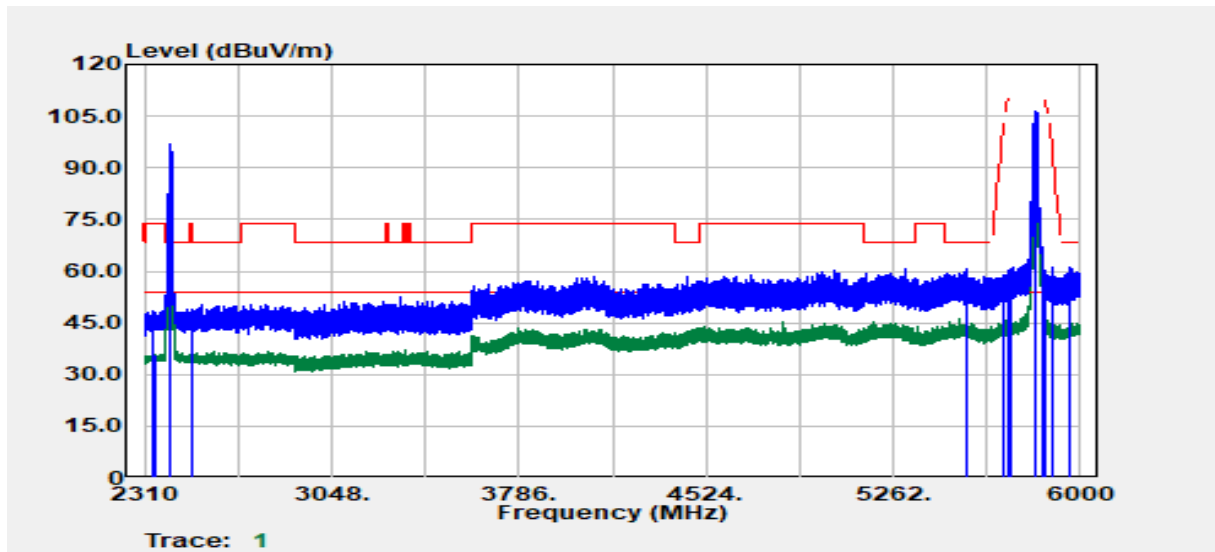


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2343.41	Peak	43.74	4.89	48.63	74.00	-25.37
2350.41	Average	30.96	4.96	35.93	54.00	-18.07
2412.00	Peak	92.03	4.84	96.86	--	--
2412.00	Average	89.97	4.84	94.80	--	--
2492.66	Average	30.95	5.27	36.23	54.00	-17.77
2495.26	Peak	43.82	5.28	49.09	74.00	-24.91
5547.11	Peak	47.85	12.89	60.74	68.20	-7.46
5698.61	Peak	45.18	13.55	58.73	104.18	-45.45
5718.74	Peak	46.37	13.66	60.03	110.45	-50.42
5721.61	Peak	46.95	13.67	60.63	114.48	-53.86
5825.00	Peak	92.47	14.09	106.56	--	--
5825.00	Average	84.44	14.09	98.53	--	--
5850.24	Peak	52.28	14.02	66.30	121.64	-55.35
5865.87	Peak	46.21	14.02	60.23	107.75	-47.53
5890.87	Peak	46.96	14.03	60.98	93.42	-32.44
5957.62	Peak	46.80	14.16	60.96	68.20	-7.24

Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11a (5700 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

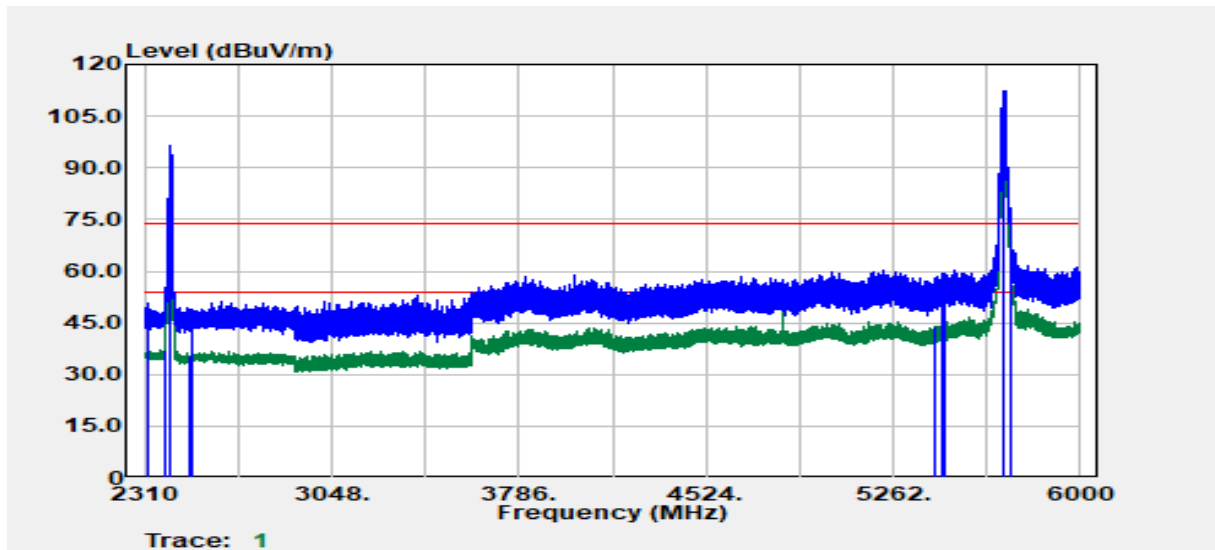

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2323.60	Peak	46.21	4.73	50.94	74.00	-23.06
2387.23	Average	32.35	4.95	37.30	54.00	-16.70
2412.00	Peak	91.39	4.84	96.23	--	--
2412.00	Average	89.47	4.84	94.30	--	--
2490.46	Average	30.17	5.27	35.44	54.00	-18.56
2497.46	Peak	43.58	5.28	48.86	74.00	-25.14
5430.28	Average	31.79	12.35	44.14	54.00	-9.86
5454.38	Peak	46.82	12.39	59.21	74.00	-14.79
5463.08	Peak	46.97	12.42	59.40	74.00	-14.60
5700.00	Peak	98.93	13.56	112.49	--	--
5700.00	Average	92.56	13.56	106.12	--	--
5725.00	Peak	50.70	13.69	64.39	74.00	-9.61


Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11a (5700 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

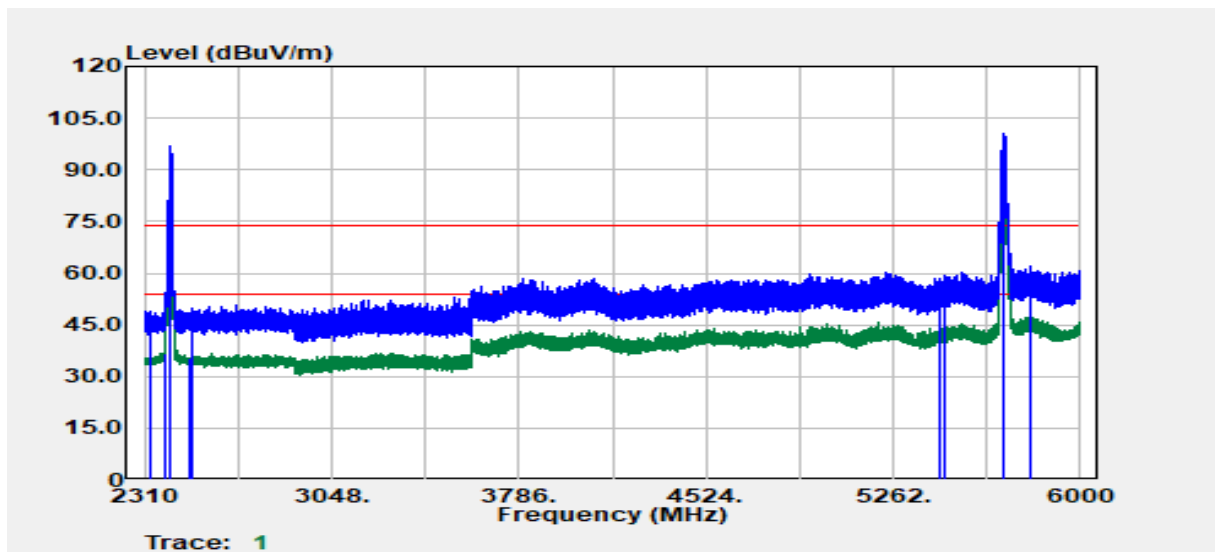

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2336.81	Peak	43.89	4.81	48.70	74.00	-25.30
2388.43	Average	31.89	4.96	36.85	54.00	-17.15
2412.00	Peak	92.11	4.84	96.95	--	--
2412.00	Average	90.10	4.84	94.93	--	--
2487.66	Average	30.01	5.27	35.27	54.00	-18.73
2495.26	Peak	44.33	5.28	49.61	74.00	-24.39
5447.08	Peak	46.07	12.37	58.44	74.00	-15.56
5449.48	Average	32.29	12.37	44.66	54.00	-9.34
5469.38	Peak	46.82	12.44	59.26	74.00	-14.74
5700.00	Peak	86.91	13.56	100.47	--	--
5700.00	Average	80.35	13.56	93.91	--	--
5803.09	Peak	48.03	14.15	62.18	74.00	-11.82




Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11ax HE160 (5250 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

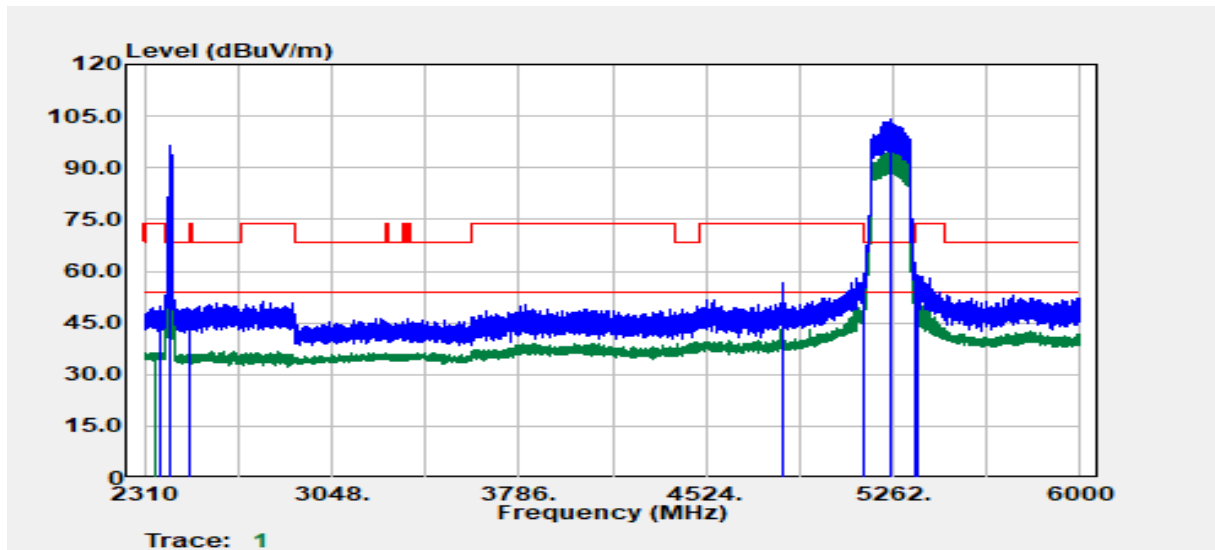


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2369.47	Peak	44.98	4.78	49.76	74.00	-24.24
2369.47	Average	31.59	4.78	36.37	54.00	-17.63
2412.00	Peak	91.45	4.84	96.29	--	--
2412.00	Average	89.55	4.84	94.39	--	--
2489.48	Peak	43.86	5.27	49.13	74.00	-24.87
2489.48	Average	30.68	5.27	35.95	54.00	-18.05
4824.12	Average	43.24	10.29	53.52	54.00	-0.48
5144.95	Peak	47.23	12.15	59.38	74.00	-14.62
5250.00	Peak	92.06	12.04	104.10	--	--
5250.00	Average	82.94	12.04	94.98	--	--
5353.36	Peak	47.30	12.14	59.44	74.00	-14.56
5354.36	Average	39.26	12.15	51.41	54.00	-2.59

Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11ax HE160 (5250 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

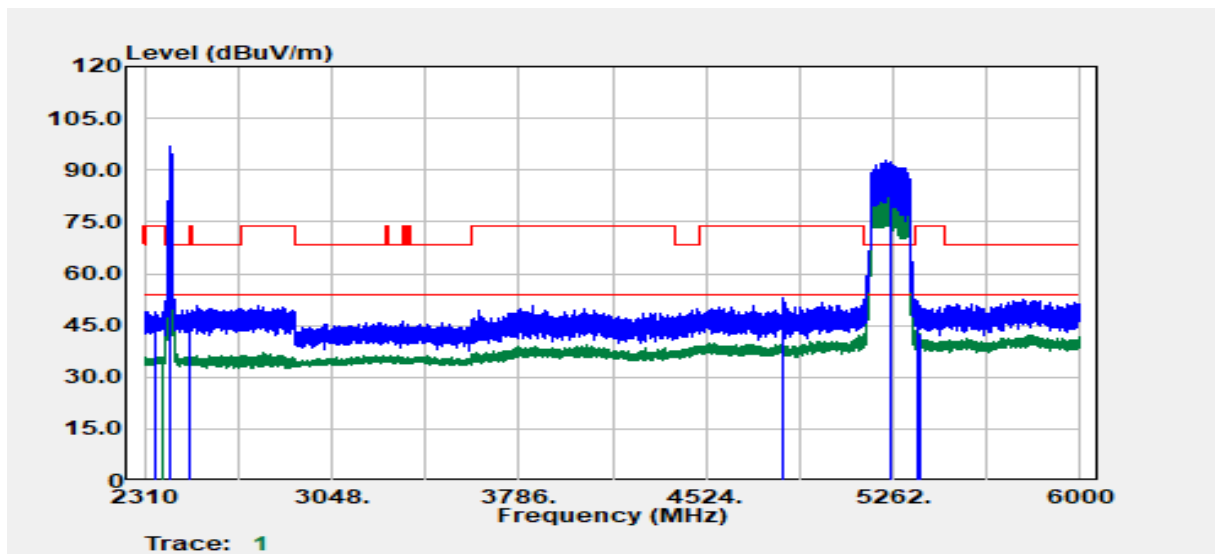


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2352.24	Peak	44.03	4.94	48.97	74.00	-25.03
2352.24	Average	31.00	4.94	35.94	54.00	-18.06
2412.00	Peak	91.84	4.84	96.68	--	--
2412.00	Average	89.90	4.84	94.74	--	--
2487.12	Peak	42.34	5.27	47.60	74.00	-26.40
2487.12	Average	30.69	5.27	35.96	54.00	-18.04
4824.12	Peak	42.51	10.29	52.80	74.00	-21.20
4824.12	Average	36.58	10.29	46.87	54.00	-7.13
5250.00	Peak	80.65	12.04	92.69	--	--
5250.00	Average	72.64	12.04	84.68	--	--
5356.36	Peak	39.88	12.15	52.03	74.00	-21.97
5371.16	Average	30.14	12.21	42.35	54.00	-11.65

Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11a (5700 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

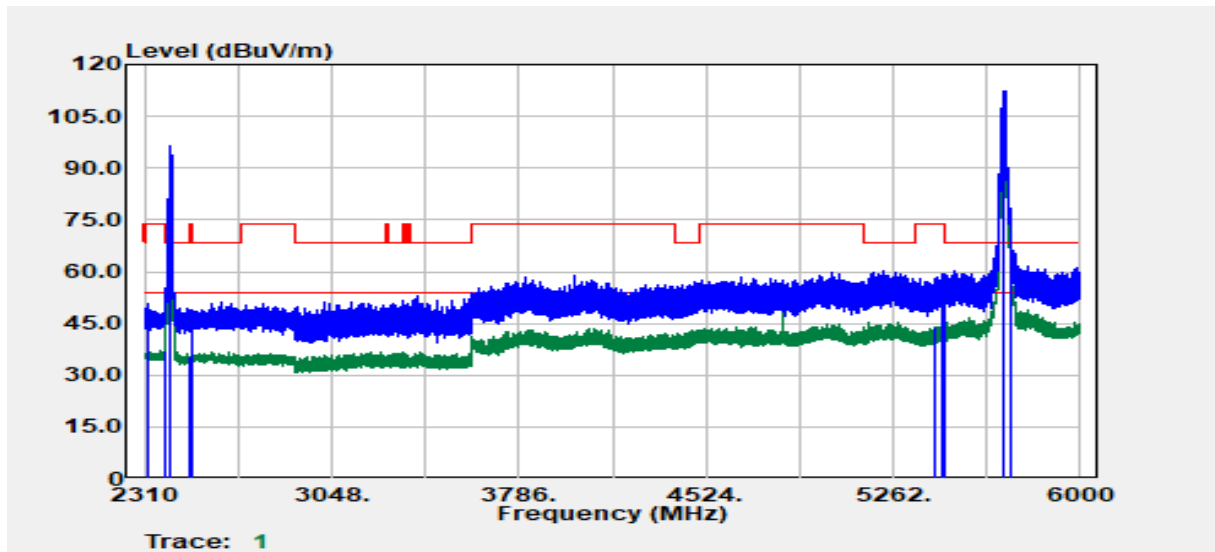


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2323.60	Peak	46.21	4.73	50.94	74.00	-23.06
2387.23	Average	32.35	4.95	37.30	54.00	-16.70
2412.00	Peak	91.39	4.84	96.23	--	--
2412.00	Average	89.47	4.84	94.30	--	--
2490.46	Average	30.17	5.27	35.44	54.00	-18.56
2497.46	Peak	43.58	5.28	48.86	74.00	-25.14
5430.28	Average	31.79	12.35	44.14	54.00	-9.86
5454.38	Peak	46.82	12.39	59.21	74.00	-14.79
5463.08	Peak	46.97	12.42	59.40	68.20	-8.80
5700.00	Peak	98.93	13.56	112.49	--	--
5700.00	Average	92.56	13.56	106.12	--	--
5725.00	Peak	50.70	13.69	64.39	68.20	-3.81

Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11a (5700 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

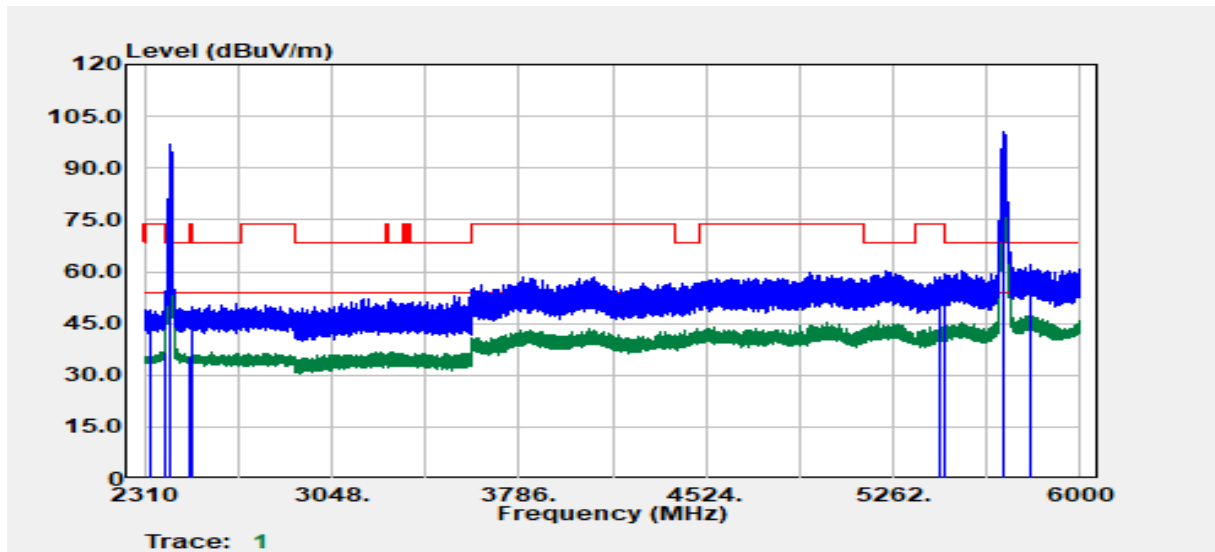


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2336.81	Peak	43.89	4.81	48.70	74.00	-25.30
2388.43	Average	31.89	4.96	36.85	54.00	-17.15
2412.00	Peak	92.11	4.84	96.95	--	--
2412.00	Average	90.10	4.84	94.93	--	--
2487.66	Average	30.01	5.27	35.27	54.00	-18.73
2495.26	Peak	44.33	5.28	49.61	74.00	-24.39
5447.08	Peak	46.07	12.37	58.44	74.00	-15.56
5449.48	Average	32.29	12.37	44.66	54.00	-9.34
5469.38	Peak	46.82	12.44	59.26	68.20	-8.94
5700.00	Peak	86.91	13.56	100.47	--	--
5700.00	Average	80.35	13.56	93.91	--	--
5803.09	Peak	48.03	14.15	62.18	68.20	-6.02

Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11ax HE20 (5825 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

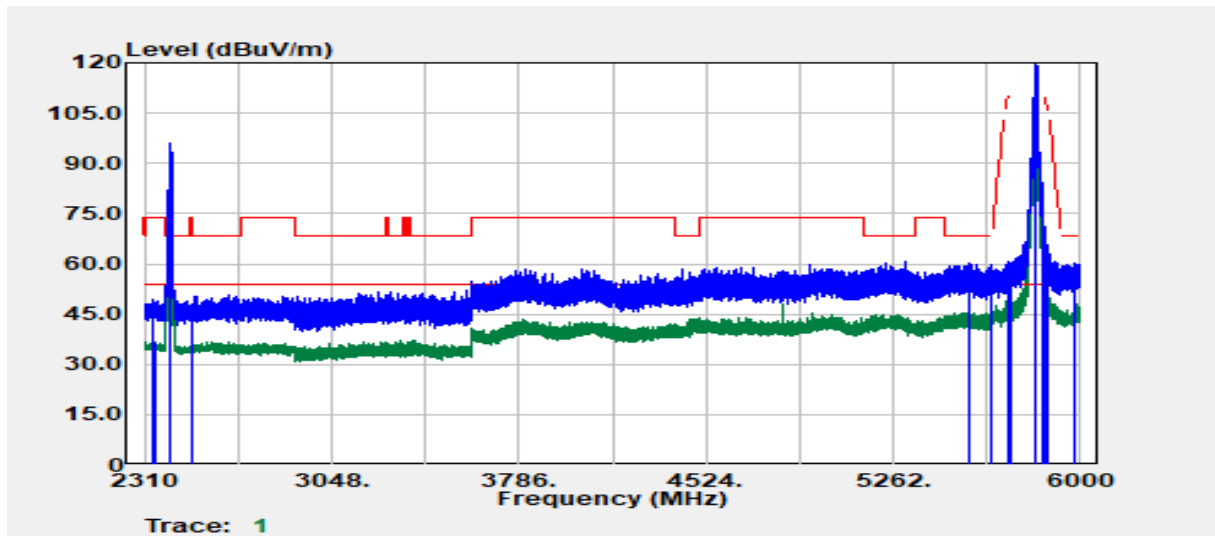

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2338.21	Peak	44.46	4.83	49.29	74.00	-24.71
2349.81	Average	31.56	4.96	36.52	54.00	-17.48
2412.00	Peak	91.05	4.84	95.88	--	--
2412.00	Average	89.17	4.84	94.00	--	--
2495.46	Average	30.72	5.28	35.99	54.00	-18.01
2496.06	Peak	42.92	5.28	48.20	74.00	-25.80
5566.11	Peak	47.24	12.89	60.13	68.20	-8.07
5650.99	Peak	46.38	13.29	59.66	68.93	-9.27
5717.99	Peak	47.17	13.65	60.83	110.24	-49.41
5722.86	Peak	46.63	13.68	60.31	117.33	-57.02
5825.00	Peak	105.47	14.09	119.56	--	--
5825.00	Average	98.08	14.09	112.17	--	--
5850.00	Peak	62.93	14.02	76.95	122.20	-45.25
5858.62	Peak	56.89	14.02	70.91	109.79	-38.87
5875.00	Peak	50.59	14.03	64.61	105.20	-40.59
5972.87	Peak	46.12	14.16	60.28	68.20	-7.92


Test Mode	IEEE 802.11b (2412 MHz)+ IEEE 802.11ax HE20 (5825 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Band Edge	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

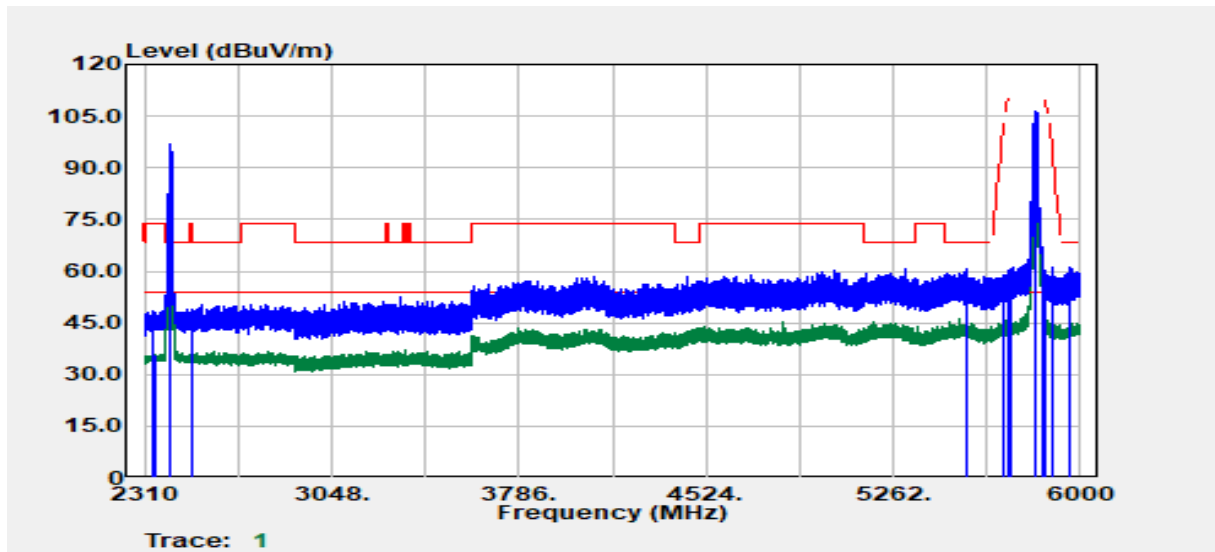

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2343.41	Peak	43.74	4.89	48.63	74.00	-25.37
2350.41	Average	30.96	4.96	35.93	54.00	-18.07
2412.00	Peak	92.03	4.84	96.86	--	--
2412.00	Average	89.97	4.84	94.80	--	--
2492.66	Average	30.95	5.27	36.23	54.00	-17.77
2495.26	Peak	43.82	5.28	49.09	74.00	-24.91
5547.11	Peak	47.85	12.89	60.74	68.20	-7.46
5698.61	Peak	45.18	13.55	58.73	104.18	-45.45
5718.74	Peak	46.37	13.66	60.03	110.45	-50.42
5721.61	Peak	46.95	13.67	60.63	114.48	-53.86
5825.00	Peak	92.47	14.09	106.56	--	--
5825.00	Average	84.44	14.09	98.53	--	--
5850.24	Peak	52.28	14.02	66.30	121.64	-55.35
5865.87	Peak	46.21	14.02	60.23	107.75	-47.53
5890.87	Peak	46.96	14.03	60.98	93.42	-32.44
5957.62	Peak	46.80	14.16	60.96	68.20	-7.24


**Band Edge Test Data: Beamforming**  
**Test Data for UNII-1**

Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

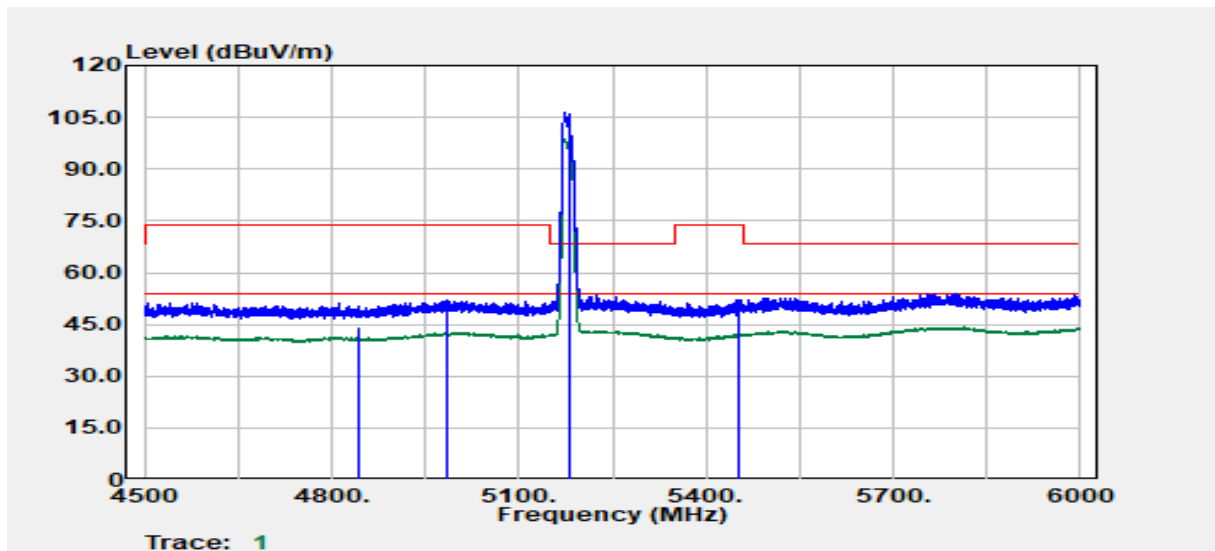

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4844.06	Average	33.35	10.35	43.70	54.00	-10.30
4985.08	Peak	40.59	11.47	52.07	74.00	-21.93
5180.00	Peak	94.52	12.10	106.62	--	--
5180.00	Average	86.65	12.10	98.75	--	--
5452.41	Peak	39.66	12.38	52.05	74.00	-21.95
5452.66	Average	29.69	12.38	42.08	54.00	-11.92


Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

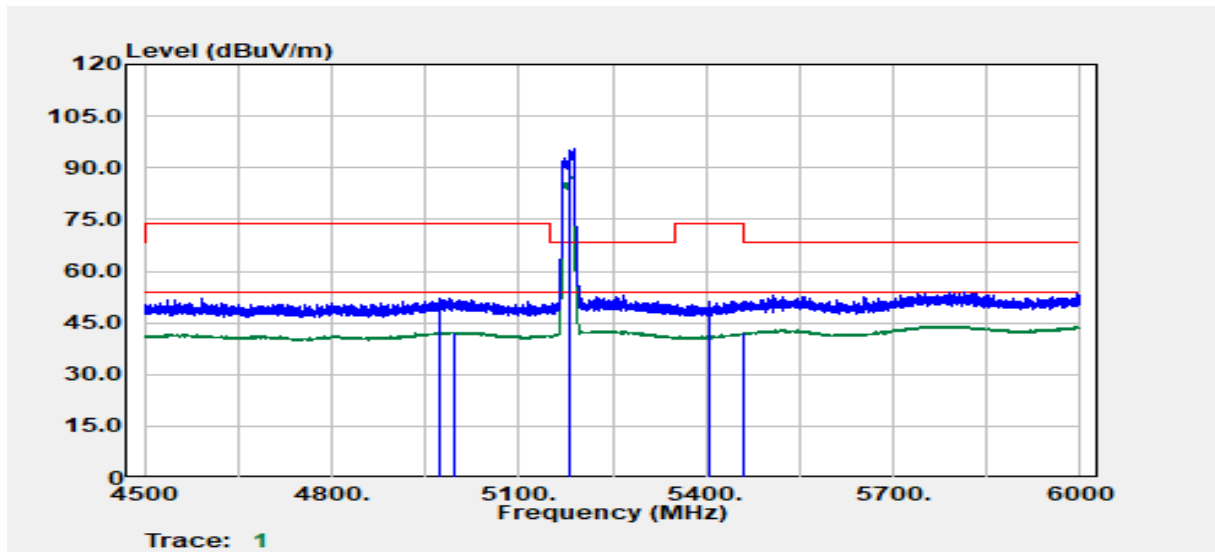

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4971.58	Peak	40.90	11.35	52.25	74.00	-21.75
4997.58	Average	30.74	11.59	42.33	54.00	-11.67
5180.00	Peak	83.27	12.10	95.37	--	--
5180.00	Average	75.57	12.10	87.67	--	--
5405.40	Peak	39.00	12.33	51.32	74.00	-22.68
5459.41	Average	29.49	12.41	41.90	54.00	-12.10




Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

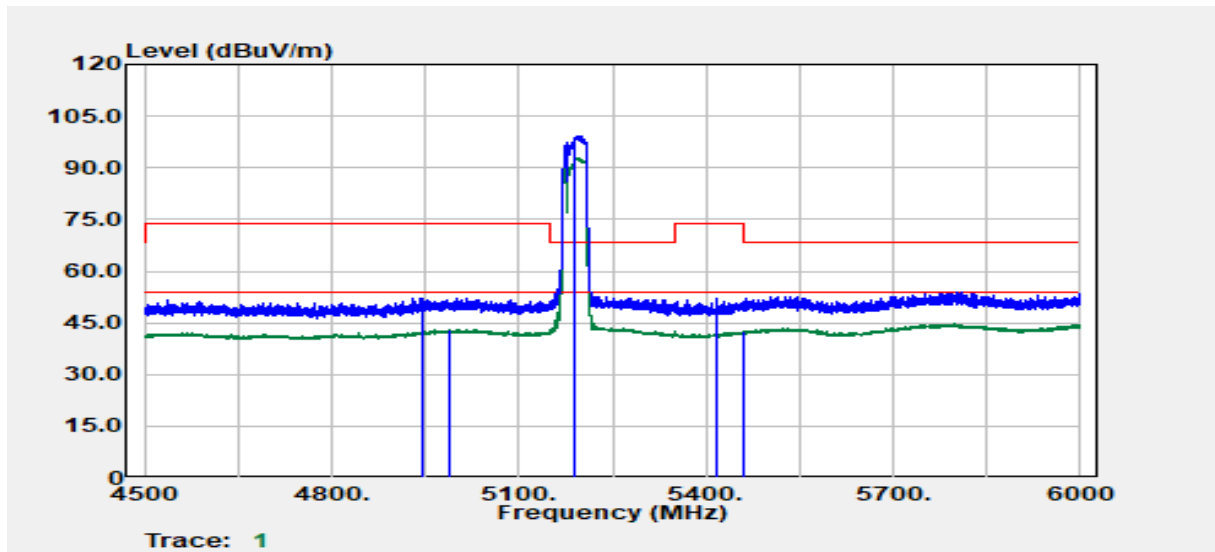


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4943.57	Peak	41.01	11.11	52.12	74.00	-21.88
4989.83	Average	31.72	11.52	43.24	54.00	-10.76
5190.00	Peak	87.11	12.08	99.19	--	--
5190.00	Average	80.83	12.08	92.91	--	--
5417.15	Peak	39.51	12.34	51.85	74.00	-22.15
5459.41	Average	30.37	12.41	42.78	54.00	-11.22

Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

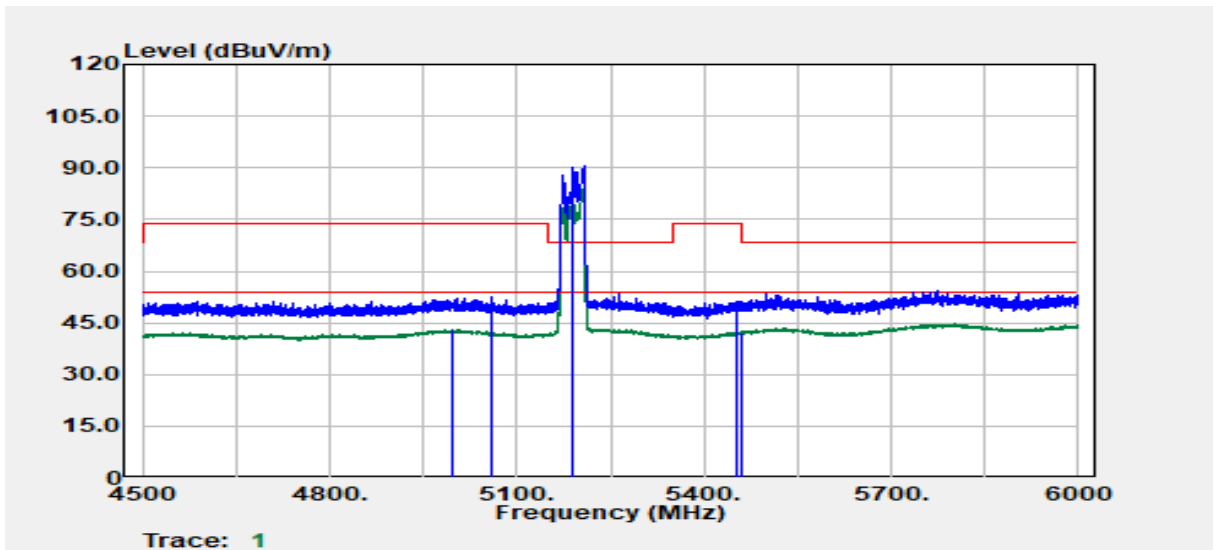


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4996.33	Average	31.33	11.58	42.91	54.00	-11.09
5059.84	Peak	40.43	11.97	52.40	74.00	-21.60
5190.00	Peak	78.33	12.08	90.41	--	--
5190.00	Average	72.54	12.08	84.62	--	--
5453.41	Peak	38.96	12.39	51.34	74.00	-22.66
5458.66	Average	29.93	12.41	42.33	54.00	-11.67

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

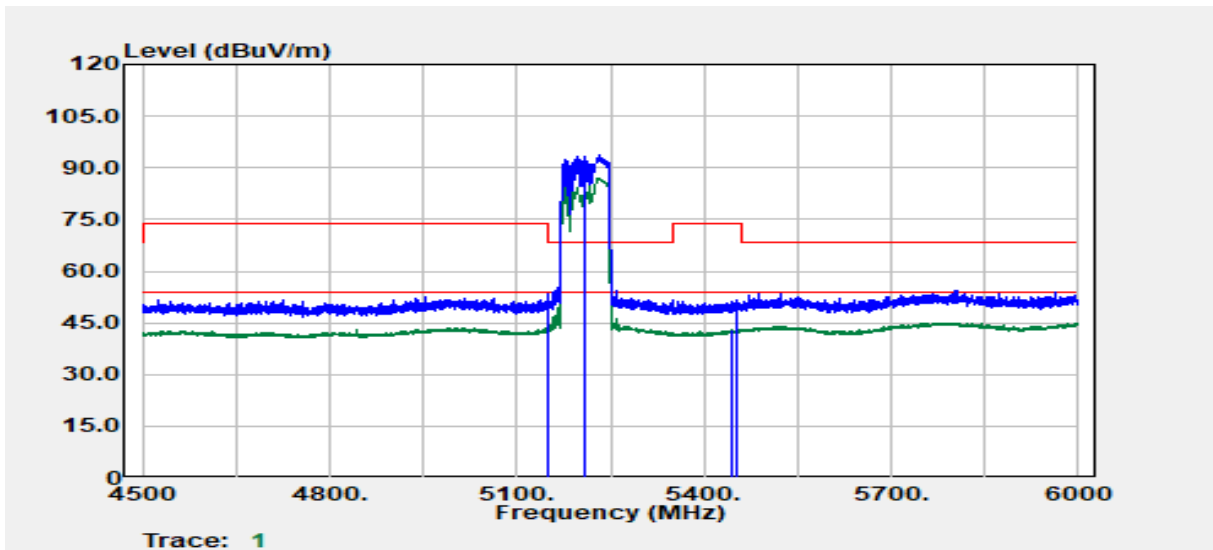


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
5149.20	Peak	41.40	12.16	53.56	74.00	-20.44
5149.50	Average	33.52	12.16	45.68	54.00	-8.32
5210.00	Peak	81.62	12.06	93.68	--	--
5210.00	Average	74.93	12.06	86.98	--	--
5444.40	Average	30.62	12.37	42.99	54.00	-11.01
5452.20	Peak	39.07	12.38	51.45	74.00	-22.55

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

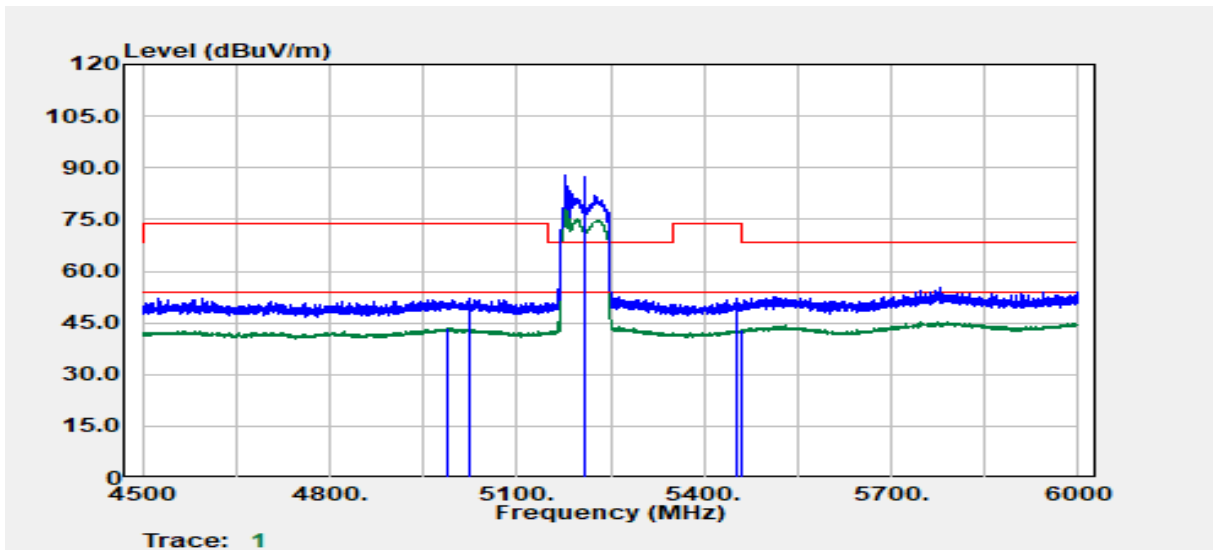


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4988.70	Average	32.02	11.51	43.52	54.00	-10.48
5023.80	Peak	40.38	11.77	52.15	74.00	-21.85
5210.00	Peak	75.64	12.06	87.69	--	--
5210.00	Average	68.66	12.06	80.72	--	--
5454.30	Peak	39.61	12.39	52.00	74.00	-22.00
5458.80	Average	30.44	12.41	42.84	54.00	-11.16

Test Mode	IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

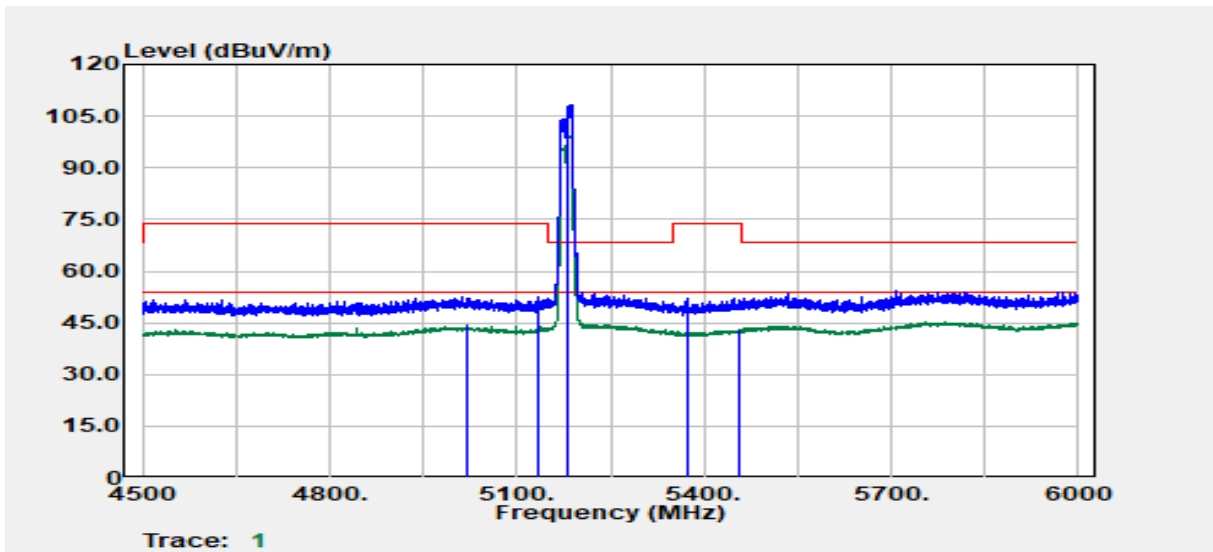


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5020.20	Average	32.49	11.75	44.24	54.00	-9.76
5135.40	Peak	40.52	12.13	52.65	74.00	-21.35
5180.00	Peak	95.93	12.10	108.03	--	--
5180.00	Average	87.12	12.10	99.22	--	--
5373.90	Peak	39.71	12.22	51.93	74.00	-22.07
5455.80	Average	30.67	12.40	43.07	54.00	-10.93

Test Mode	IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

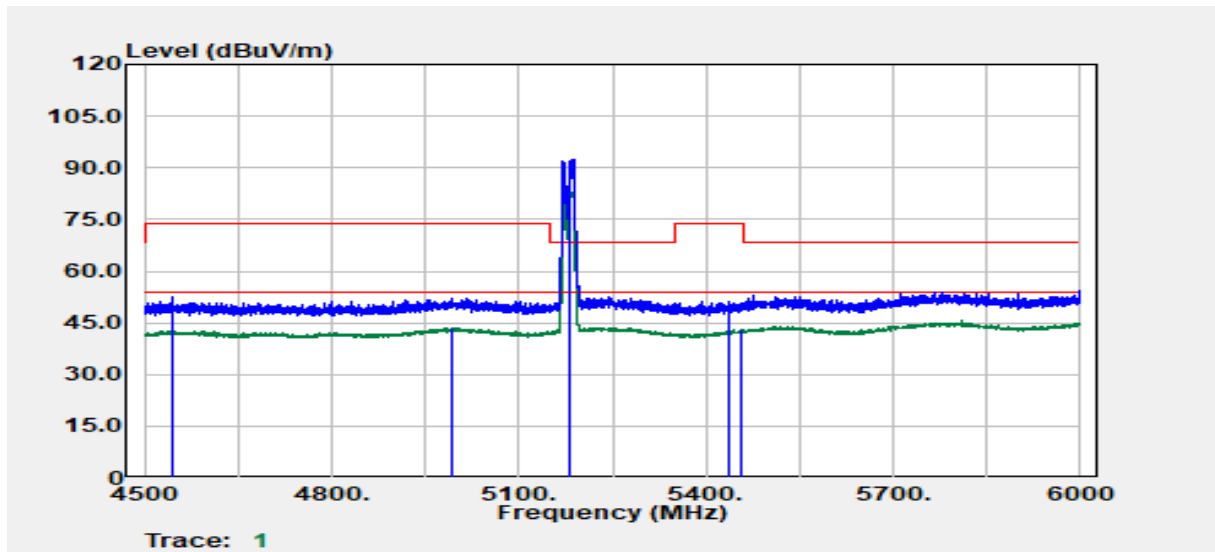


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4542.90	Peak	41.29	11.01	52.30	74.00	-21.70
4991.10	Average	31.87	11.53	43.40	54.00	-10.60
5180.00	Peak	80.39	12.10	92.49	--	--
5180.00	Average	73.32	12.10	85.42	--	--
5435.70	Peak	38.86	12.36	51.22	74.00	-22.78
5455.80	Average	30.55	12.40	42.95	54.00	-11.05

Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

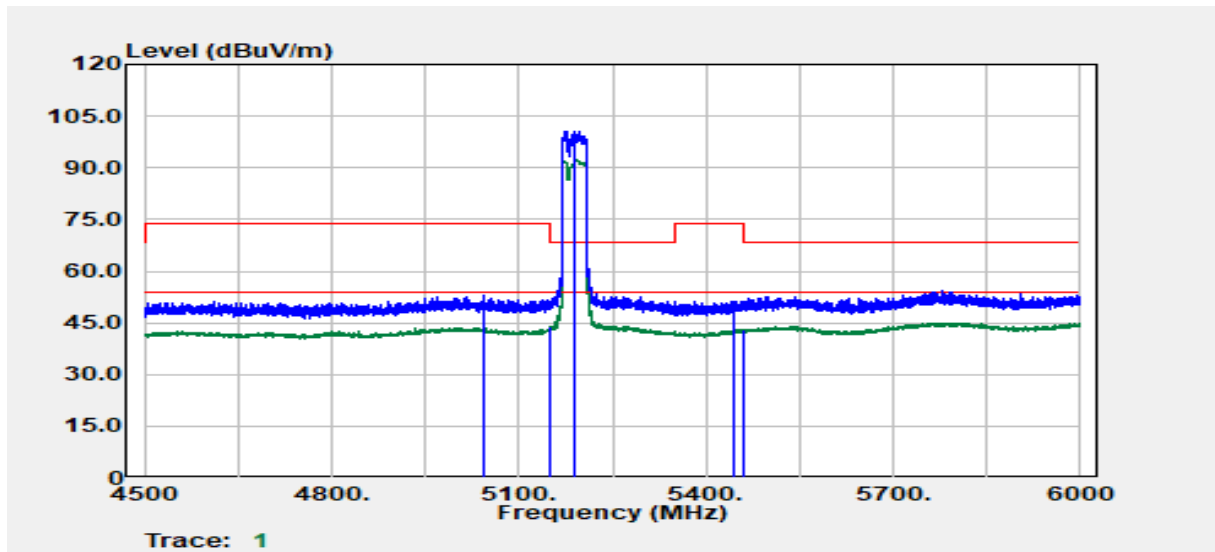

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5042.59	Peak	41.12	11.90	53.02	74.00	-20.98
5149.86	Average	31.61	12.16	43.77	54.00	-10.23
5190.00	Peak	88.67	12.08	100.75	--	--
5190.00	Average	80.22	12.08	92.30	--	--
5443.91	Peak	39.00	12.37	51.37	74.00	-22.63
5458.91	Average	30.80	12.41	43.21	54.00	-10.79


Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

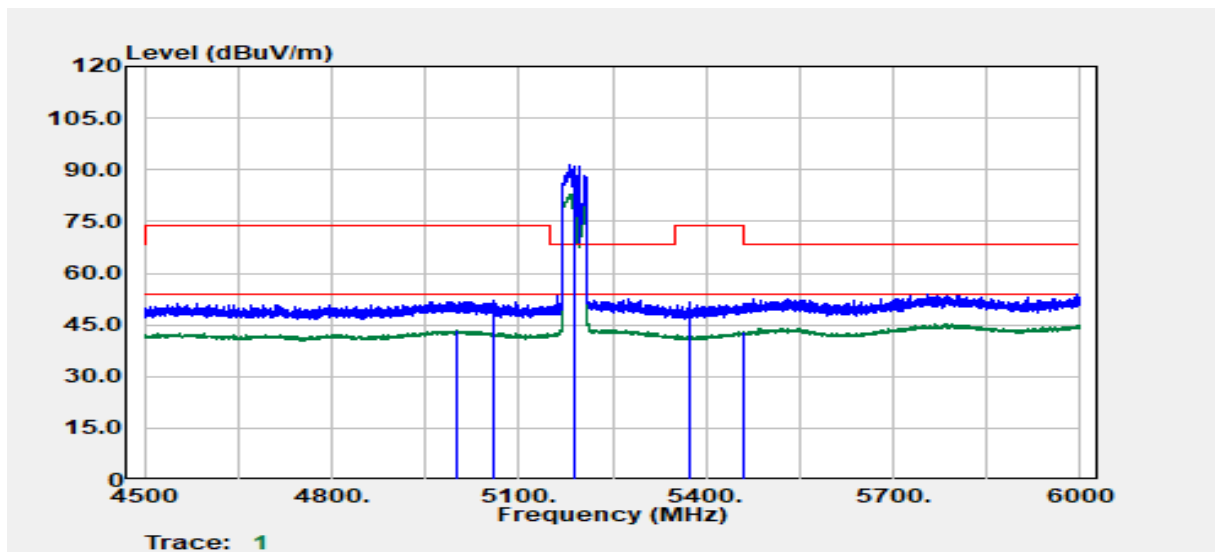

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5000.08	Average	31.69	11.61	43.30	54.00	-10.70
5058.34	Peak	40.01	11.97	51.98	74.00	-22.02
5190.00	Peak	79.39	12.08	91.47	--	--
5190.00	Average	70.86	12.08	82.94	--	--
5373.90	Peak	39.32	12.22	51.54	74.00	-22.46
5459.16	Average	30.68	12.41	43.09	54.00	-10.91




Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

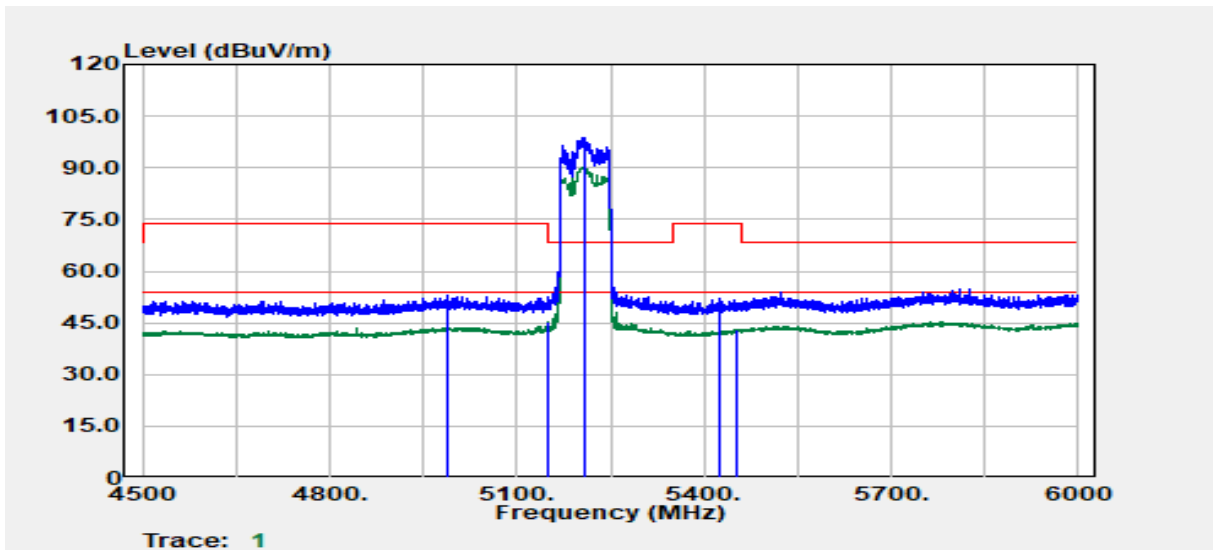

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4986.90	Peak	41.56	11.49	53.05	74.00	-20.95
5149.80	Average	33.19	12.16	45.35	54.00	-8.65
5210.00	Peak	86.80	12.06	98.86	--	--
5210.00	Average	78.18	12.06	90.23	--	--
5423.10	Peak	39.62	12.35	51.96	74.00	-22.04
5453.40	Average	30.67	12.39	43.06	54.00	-10.94

Report No.: TMWK2304001001KR


Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

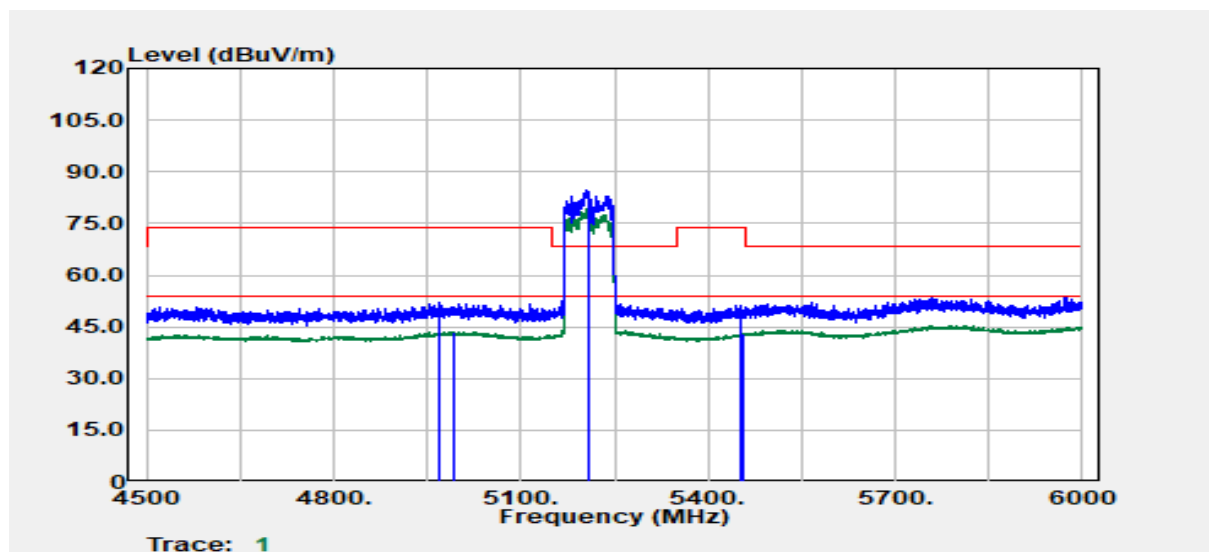

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4967.10	Peak	40.70	11.31	52.01	74.00	-21.99
4994.10	Average	31.88	11.56	43.44	54.00	-10.56
5210.00	Peak	72.71	12.06	84.77	--	--
5210.00	Average	67.25	12.06	79.31	--	--
5451.30	Peak	38.69	12.38	51.07	74.00	-22.93
5455.20	Average	30.47	12.39	42.87	54.00	-11.13


**Test Data for UNII-2a**

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

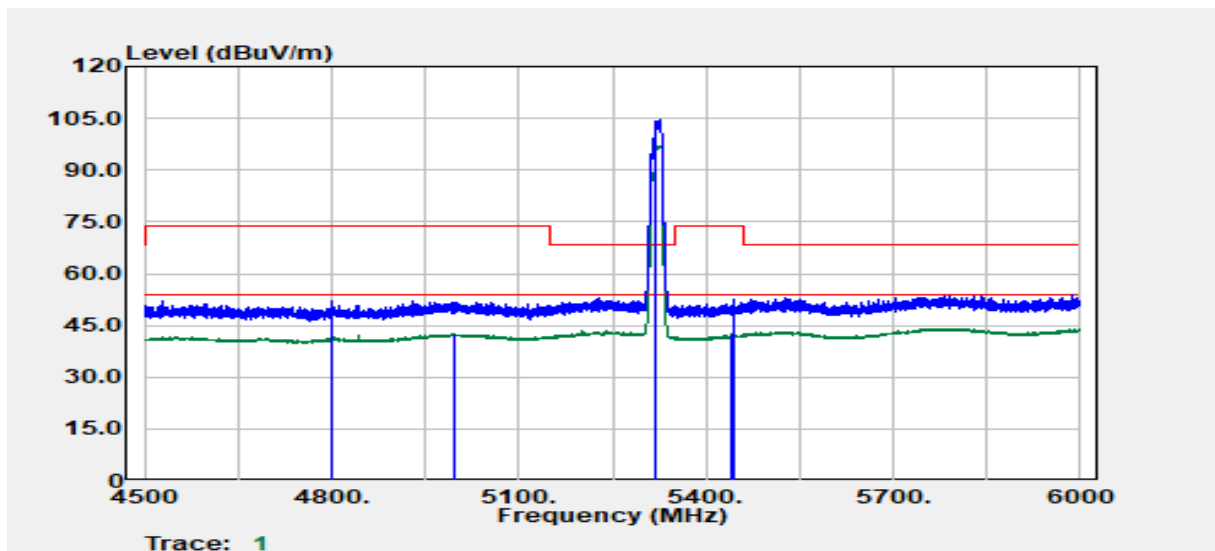


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4798.55	Peak	41.72	10.21	51.93	74.00	-22.07
4998.33	Average	30.86	11.59	42.45	54.00	-11.55
5320.00	Peak	92.40	12.14	104.54	--	--
5320.00	Average	84.71	12.14	96.86	--	--
5439.91	Average	30.10	12.36	42.46	54.00	-11.54
5443.66	Peak	40.16	12.37	52.53	74.00	-21.47

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

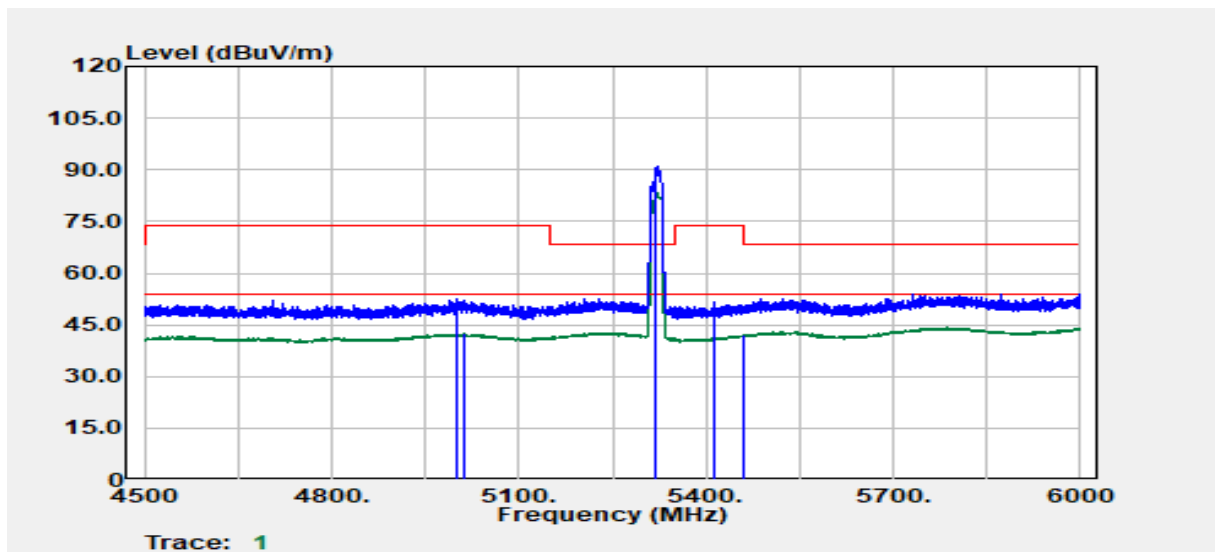


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4999.08	Peak	40.99	11.60	52.59	74.00	-21.41
5013.09	Average	30.67	11.70	42.37	54.00	-11.63
5320.00	Peak	79.01	12.14	91.16	--	--
5320.00	Average	71.24	12.14	83.38	--	--
5413.15	Peak	39.15	12.33	51.49	74.00	-22.51
5458.66	Average	29.65	12.41	42.06	54.00	-11.94

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

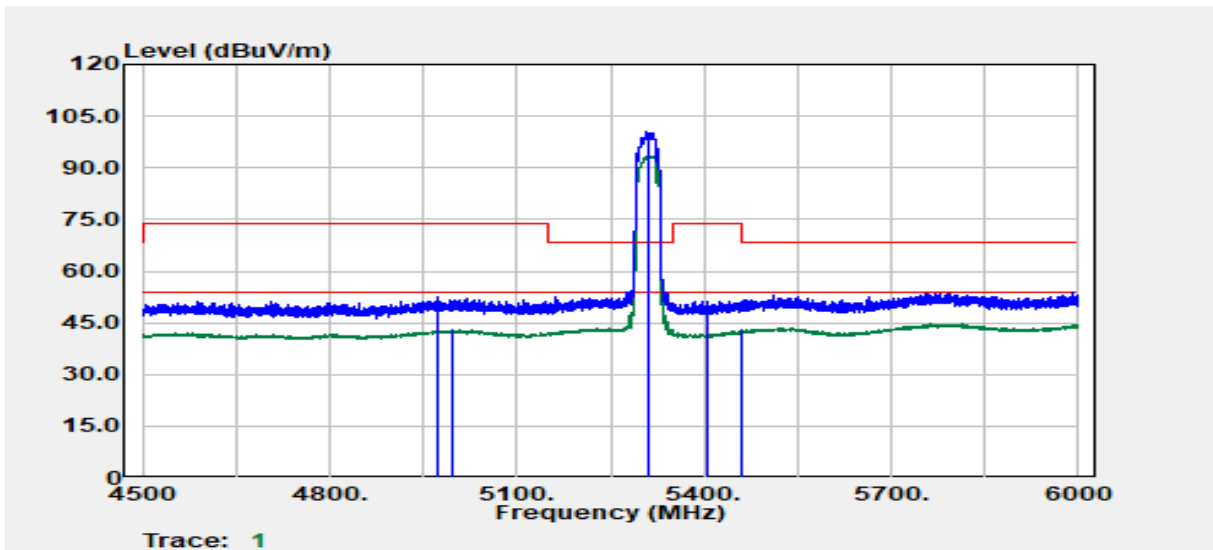


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4973.58	Peak	41.03	11.37	52.40	74.00	-21.60
4995.58	Average	31.33	11.57	42.90	54.00	-11.10
5310.00	Peak	88.60	12.15	100.75	--	--
5310.00	Average	81.29	12.15	93.44	--	--
5404.90	Peak	38.94	12.33	51.26	74.00	-22.74
5458.41	Average	30.40	12.40	42.80	54.00	-11.20

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

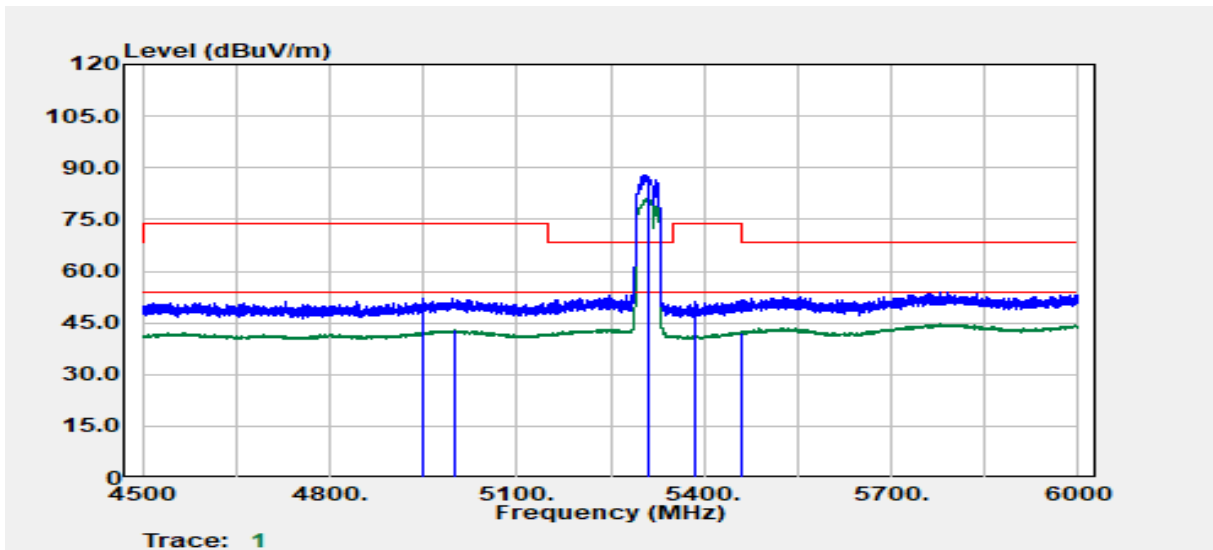


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4950.58	Peak	40.97	11.16	52.13	74.00	-21.87
4998.58	Average	31.21	11.60	42.81	54.00	-11.19
5310.00	Peak	75.81	12.15	87.96	--	--
5310.00	Average	68.77	12.15	80.92	--	--
5384.90	Peak	39.12	12.26	51.38	74.00	-22.62
5459.16	Average	29.84	12.41	42.24	54.00	-11.76

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

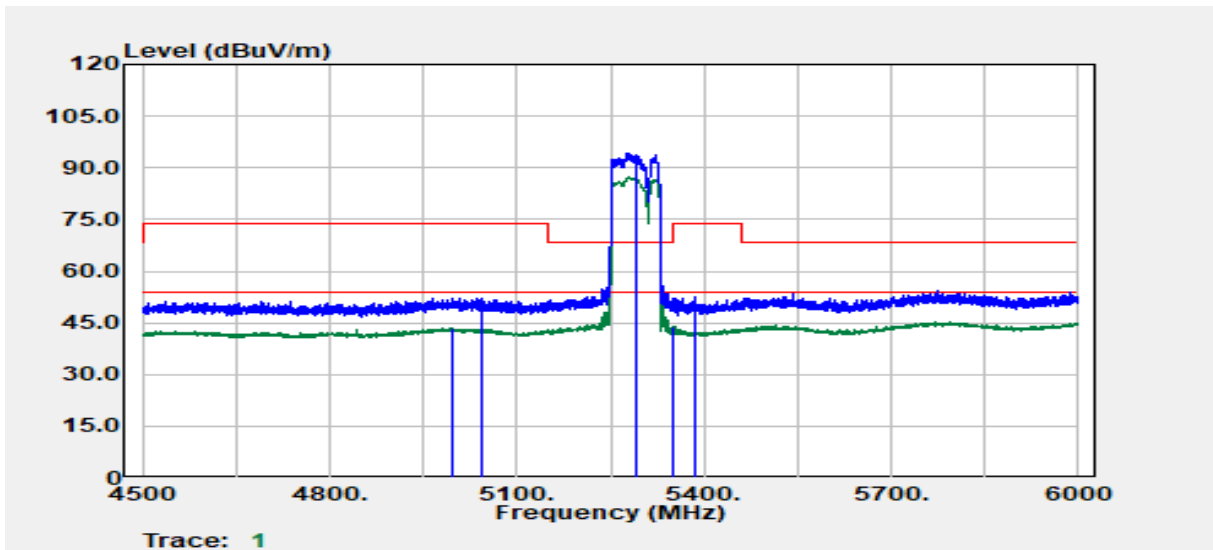

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4997.10	Average	31.90	11.58	43.48	54.00	-10.52
5043.00	Peak	40.32	11.90	52.23	74.00	-21.77
5290.00	Peak	82.22	12.13	94.35	--	--
5290.00	Average	75.06	12.13	87.18	--	--
5350.50	Average	31.78	12.13	43.91	54.00	-10.09
5384.70	Peak	40.45	12.26	52.71	74.00	-21.29


Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

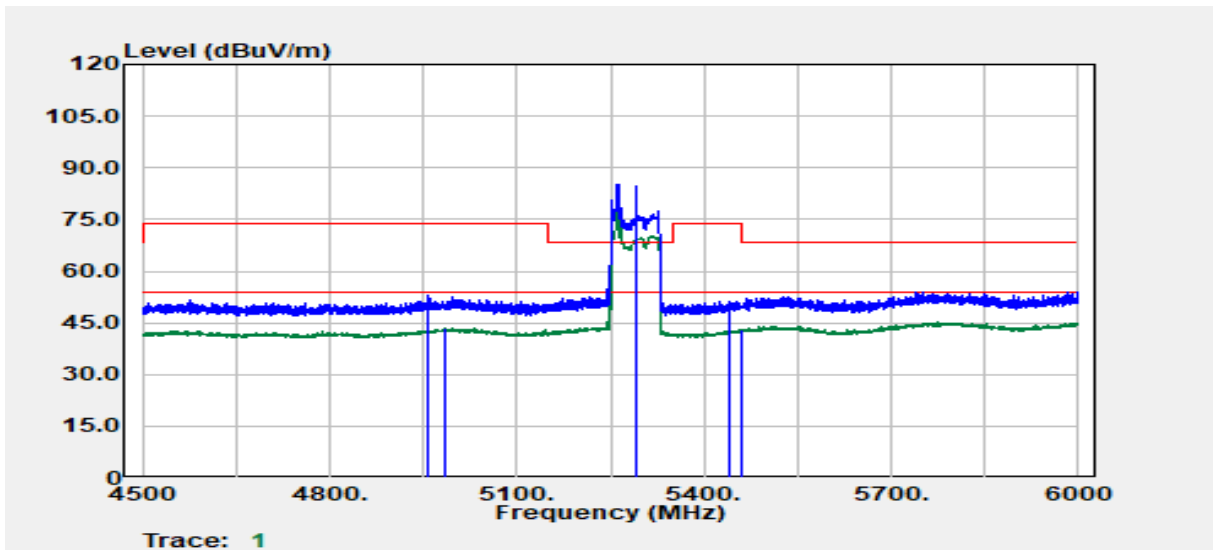

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4957.80	Peak	41.67	11.23	52.89	74.00	-21.11
4986.60	Average	31.80	11.49	43.29	54.00	-10.71
5290.00	Peak	72.93	12.13	85.06	--	--
5290.00	Average	67.10	12.13	79.23	--	--
5439.90	Peak	38.84	12.36	51.21	74.00	-22.79
5458.50	Average	30.64	12.40	43.04	54.00	-10.96




Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

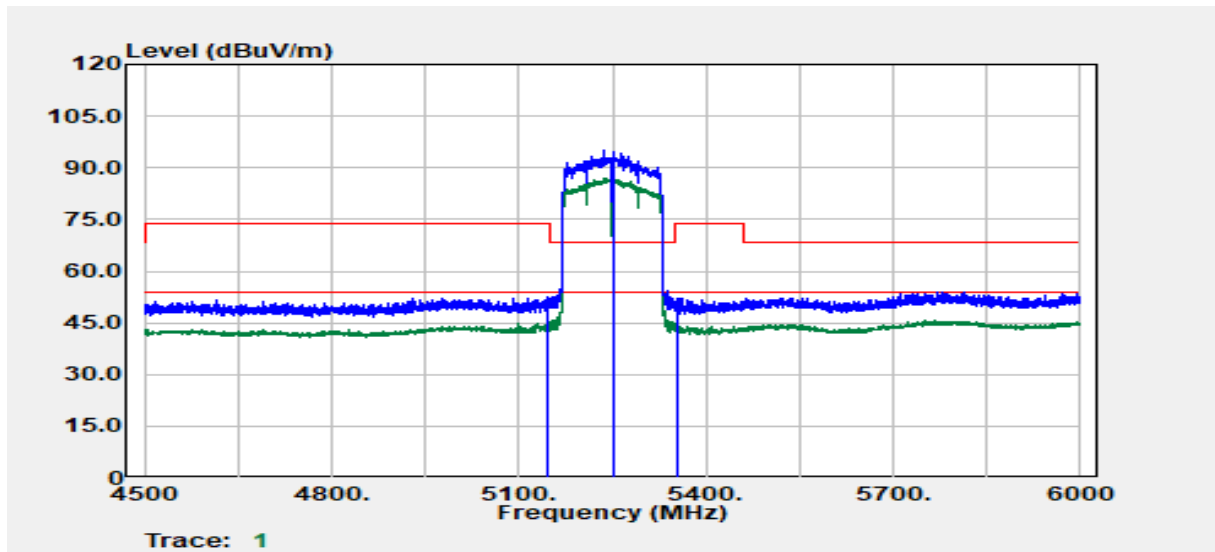


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5144.10	Peak	40.60	12.15	52.74	74.00	-21.26
5144.70	Average	33.07	12.15	45.22	54.00	-8.78
5250.00	Peak	82.88	12.04	94.92	--	--
5250.00	Average	74.77	12.04	86.81	--	--
5354.70	Average	32.78	12.15	44.93	54.00	-9.07
5355.60	Peak	39.92	12.15	52.07	74.00	-21.93

Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

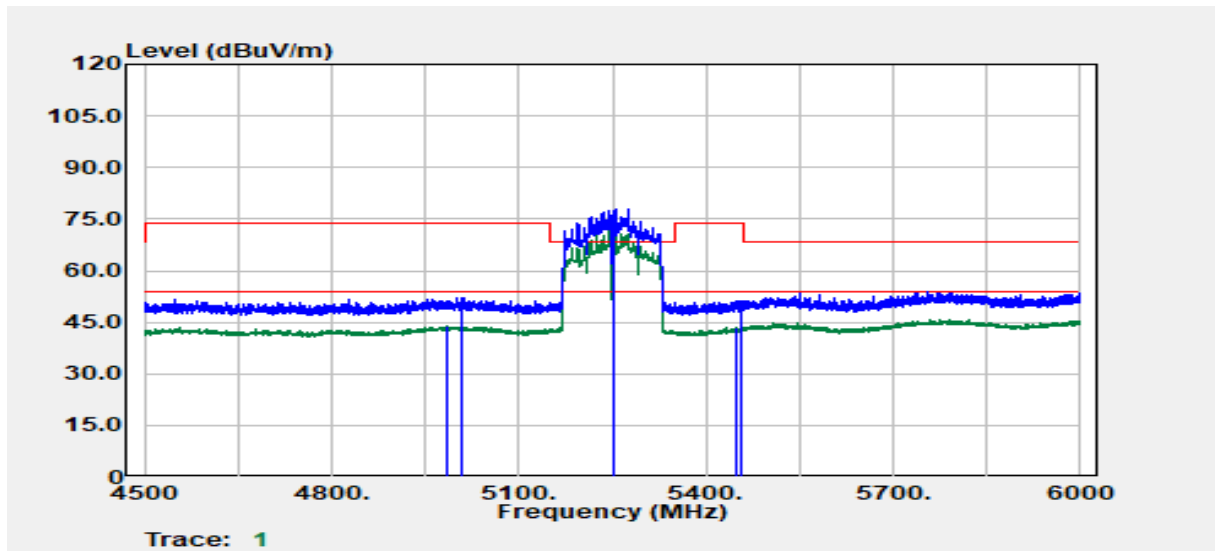


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4983.00	Average	32.40	11.46	43.85	54.00	-10.15
5007.60	Peak	40.63	11.66	52.30	74.00	-21.70
5250.00	Peak	65.78	12.04	77.82	--	--
5250.00	Average	59.63	12.04	71.67	--	--
5448.90	Average	31.13	12.37	43.50	54.00	-10.50
5457.00	Peak	38.78	12.40	51.18	74.00	-22.82

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

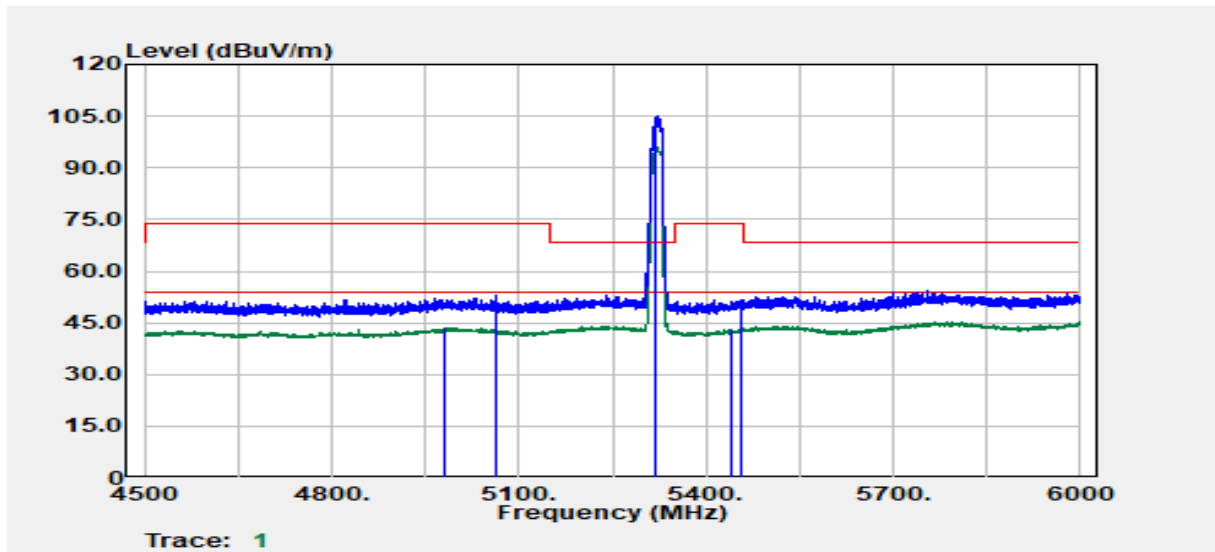


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4982.70	Average	32.18	11.45	43.63	54.00	-10.37
5063.70	Peak	40.94	11.98	52.91	74.00	-21.09
5320.00	Peak	92.83	12.14	104.97	--	--
5320.00	Average	83.81	12.14	95.95	--	--
5440.20	Average	30.85	12.36	43.21	54.00	-10.79
5456.40	Peak	39.04	12.40	51.43	74.00	-22.57

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

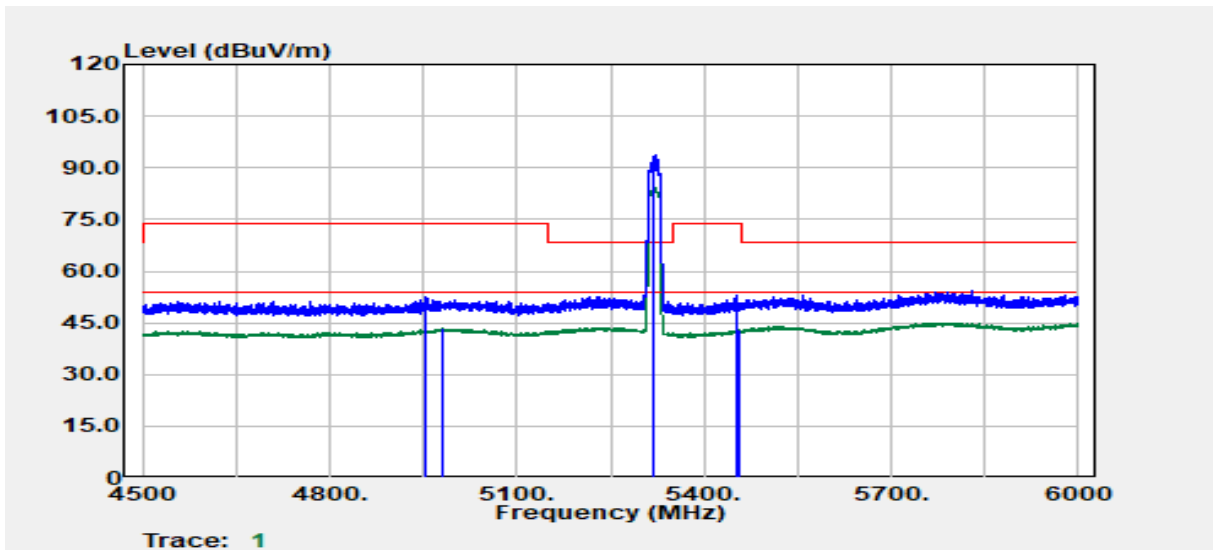


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4954.20	Peak	41.51	11.19	52.70	74.00	-21.30
4982.70	Average	31.89	11.45	43.34	54.00	-10.66
5320.00	Peak	81.46	12.14	93.60	--	--
5320.00	Average	72.58	12.14	84.72	--	--
5451.00	Peak	40.39	12.38	52.77	74.00	-21.23
5458.20	Average	30.40	12.40	42.81	54.00	-11.19

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

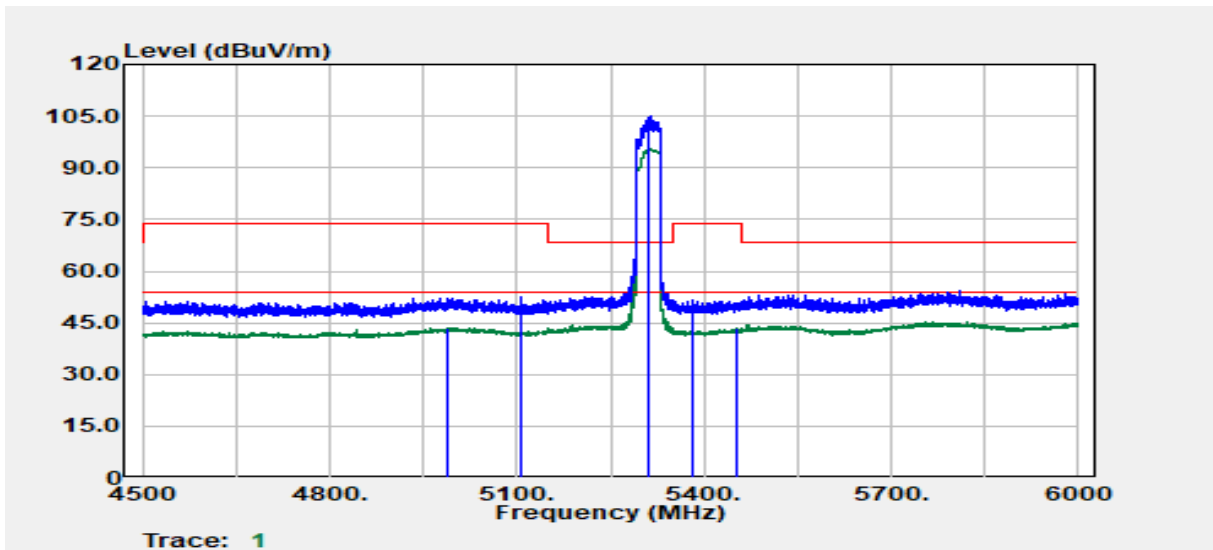


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4989.83	Average	31.95	11.52	43.47	54.00	-10.53
5108.35	Peak	40.62	12.07	52.69	74.00	-21.31
5310.00	Peak	93.09	12.15	105.23	--	--
5310.00	Average	83.50	12.15	95.64	--	--
5381.65	Peak	39.18	12.25	51.43	74.00	-22.57
5453.91	Average	31.02	12.39	43.41	54.00	-10.59

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

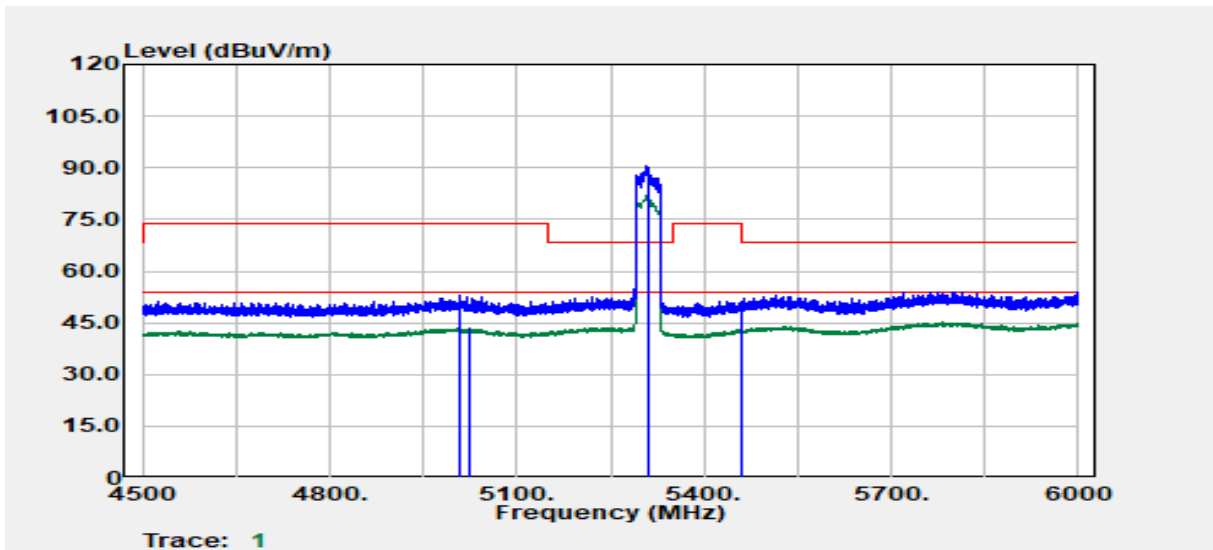


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5007.08	Peak	41.40	11.66	53.06	74.00	-20.94
5023.59	Average	31.64	11.77	43.41	54.00	-10.59
5310.00	Peak	78.34	12.15	90.49	--	--
5310.00	Average	69.76	12.15	81.90	--	--
5459.16	Average	30.55	12.41	42.96	54.00	-11.04
5459.66	Peak	38.80	12.41	51.20	74.00	-22.80

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

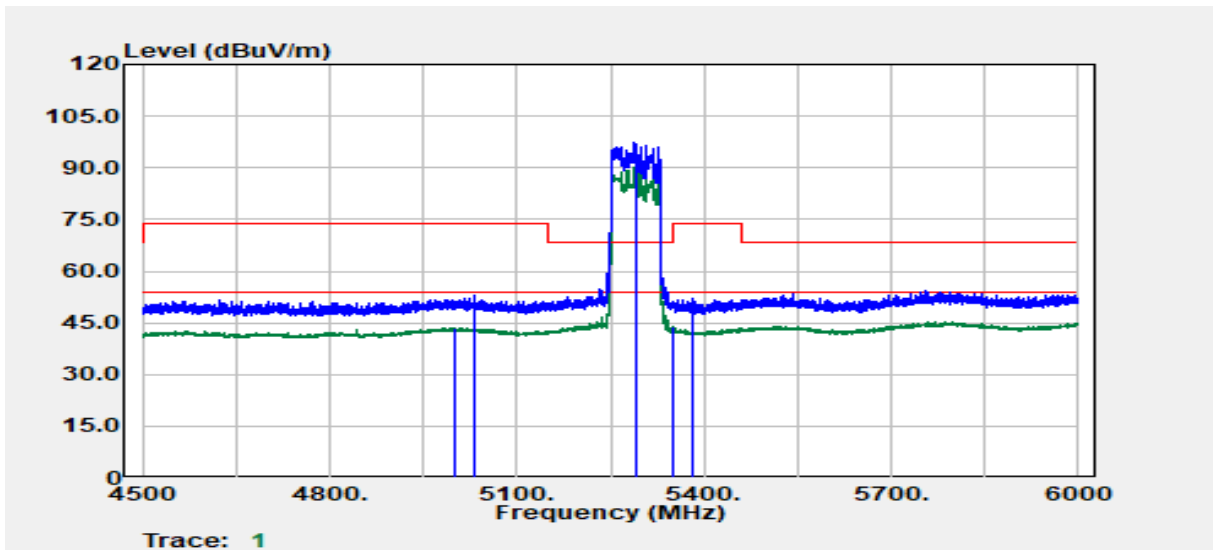

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5001.30	Average	31.87	11.62	43.49	54.00	-10.51
5031.30	Peak	41.06	11.82	52.89	74.00	-21.11
5290.00	Peak	85.37	12.13	97.50	--	--
5290.00	Average	77.90	12.13	90.03	--	--
5350.80	Average	31.71	12.13	43.84	54.00	-10.16
5380.80	Peak	39.61	12.25	51.85	74.00	-22.15


Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

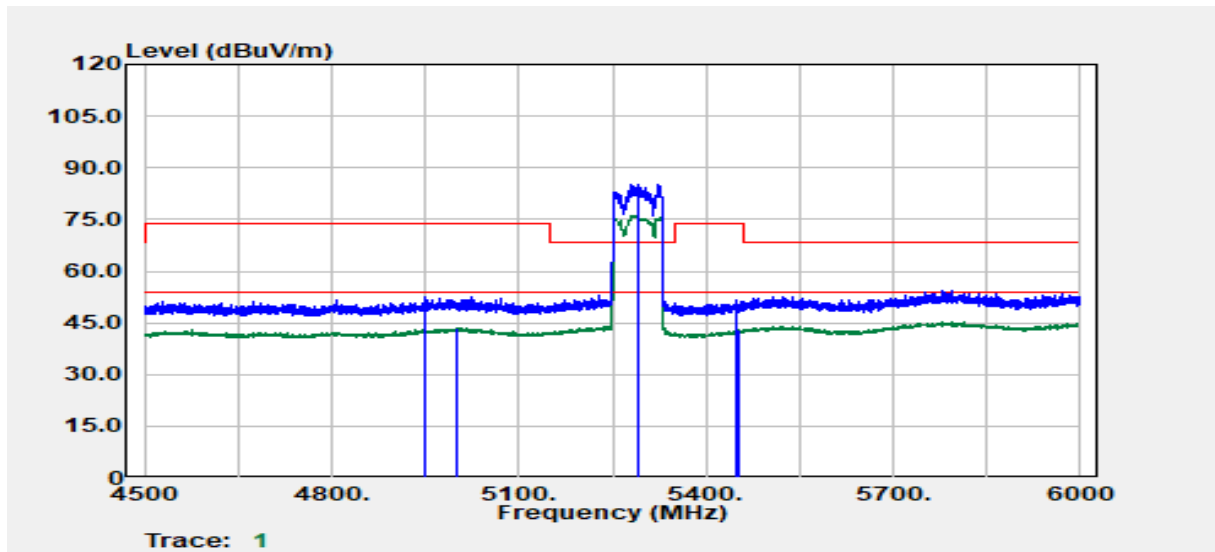

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4948.50	Peak	41.57	11.14	52.71	74.00	-21.29
5001.00	Average	31.72	11.62	43.33	54.00	-10.67
5290.00	Peak	73.09	12.13	85.22	--	--
5290.00	Average	64.05	12.13	76.18	--	--
5449.50	Peak	39.02	12.37	51.40	74.00	-22.60
5453.40	Average	30.52	12.39	42.91	54.00	-11.09




Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

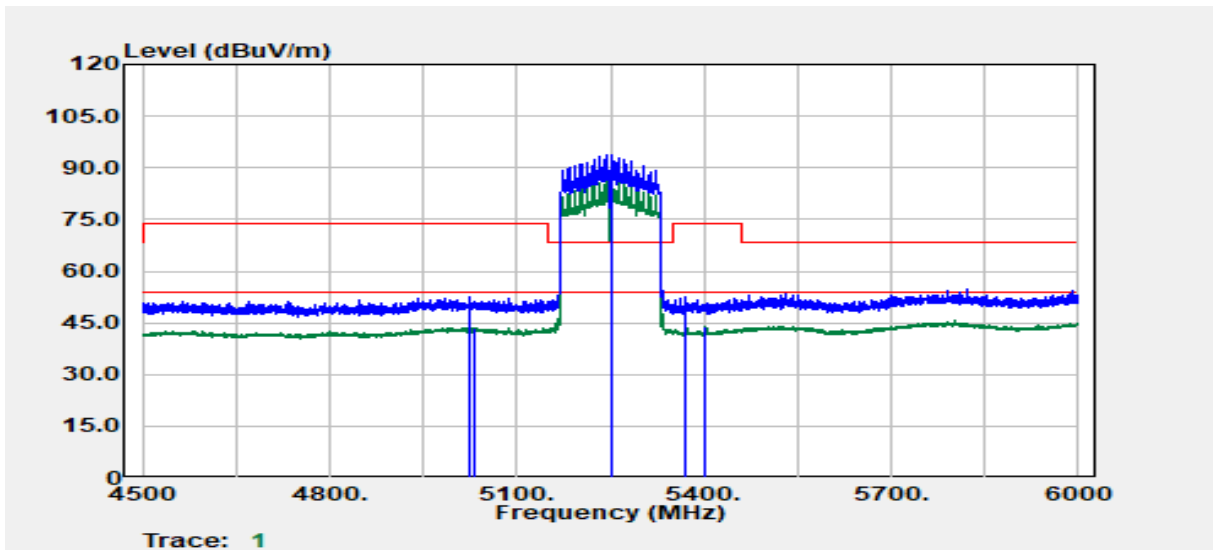

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5022.90	Peak	40.62	11.77	52.39	74.00	-21.61
5032.20	Average	31.87	11.83	43.70	54.00	-10.30
5250.00	Peak	81.70	12.04	93.74	--	--
5250.00	Average	74.29	12.04	86.33	--	--
5369.70	Peak	40.29	12.20	52.49	74.00	-21.51
5401.20	Average	31.71	12.32	44.03	54.00	-9.97


Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

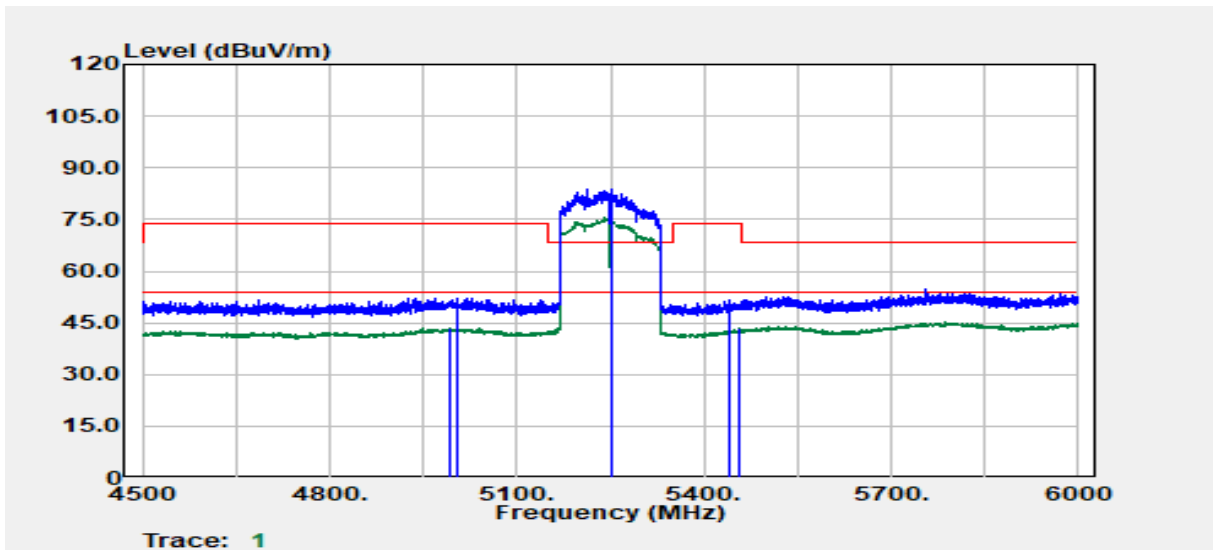

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4994.40	Average	31.94	11.56	43.50	54.00	-10.50
5005.20	Peak	40.60	11.65	52.24	74.00	-21.76
5250.00	Peak	71.85	12.04	83.89	--	--
5250.00	Average	63.36	12.04	75.40	--	--
5440.80	Peak	39.07	12.36	51.43	74.00	-22.57
5457.90	Average	30.87	12.40	43.28	54.00	-10.72


**Test Data for UNII-2c**

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	23.1(°C) / 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

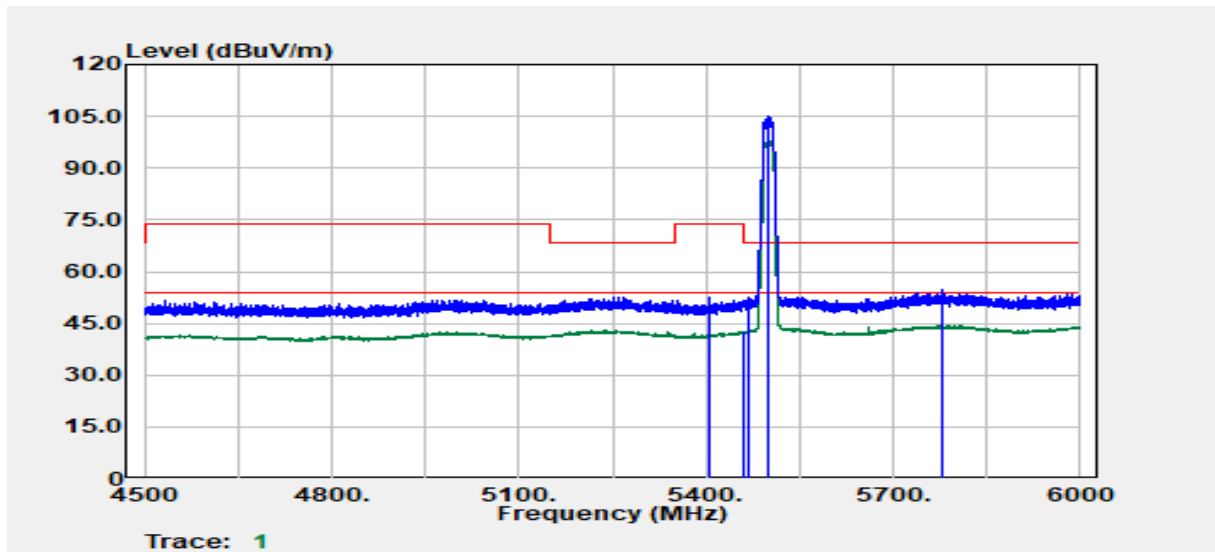


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5406.65	Peak	40.01	12.33	52.33	74.00	-21.67
5459.91	Average	30.33	12.41	42.74	54.00	-11.26
5468.66	Peak	40.14	12.44	52.58	68.20	-15.62
5500.00	Peak	92.42	12.55	104.97	--	--
5500.00	Average	85.24	12.55	97.79	--	--
5779.96	Peak	40.59	14.02	54.62	68.20	-13.58

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	23.1(°C) / 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

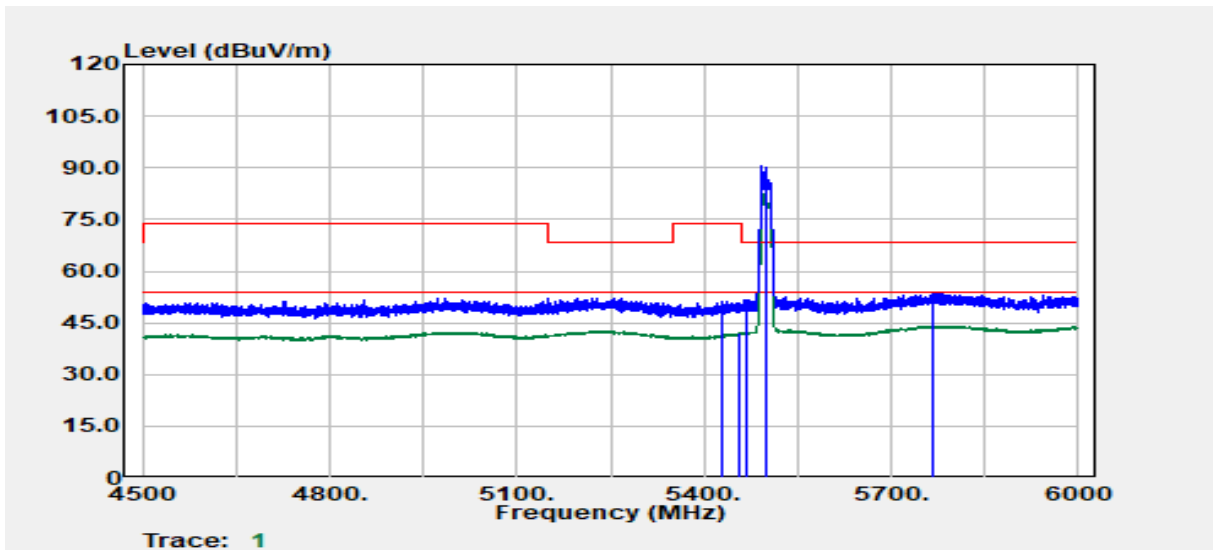


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5428.91	Peak	38.72	12.35	51.07	74.00	-22.93
5456.66	Average	29.66	12.40	42.05	54.00	-11.95
5466.16	Peak	39.27	12.43	51.71	68.20	-16.49
5500.00	Peak	78.06	12.55	90.61	--	--
5500.00	Average	71.17	12.55	83.72	--	--
5764.96	Peak	39.58	13.92	53.50	68.20	-14.70

Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

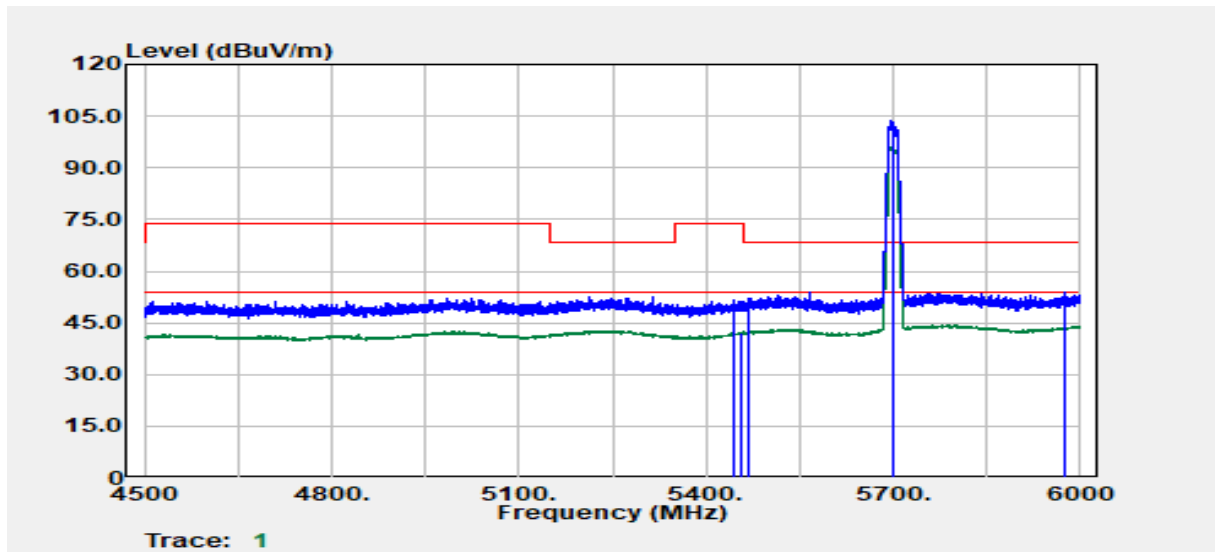


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5445.66	Peak	39.11	12.37	51.48	74.00	-22.52
5457.66	Average	29.82	12.40	42.22	54.00	-11.78
5466.66	Peak	39.58	12.43	52.01	68.20	-16.19
5700.00	Peak	90.14	13.56	103.70	--	--
5700.00	Average	82.69	13.56	96.25	--	--
5974.25	Peak	39.51	14.16	53.67	68.20	-14.53

Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

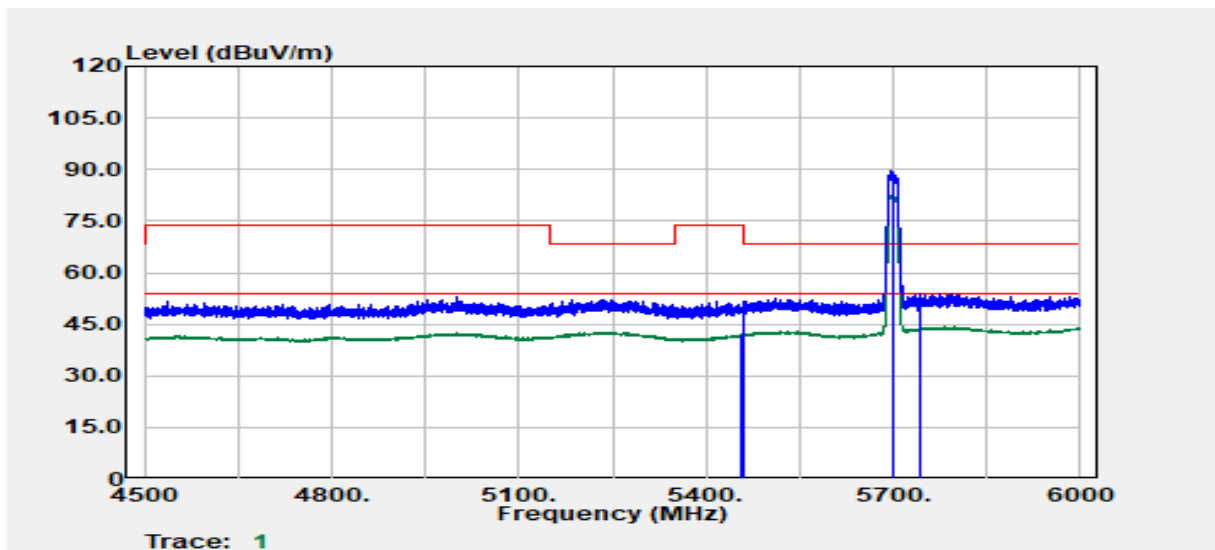


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5458.16	Average	29.73	12.40	42.13	54.00	-11.87
5459.91	Peak	39.38	12.41	51.79	74.00	-22.21
5459.91	Peak	39.38	12.41	51.79	74.00	-22.21
5700.00	Peak	76.00	13.56	89.56	--	--
5700.00	Average	69.33	13.56	82.89	--	--
5744.46	Peak	40.10	13.79	53.89	68.20	-14.31

Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	23.1(°C) / 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

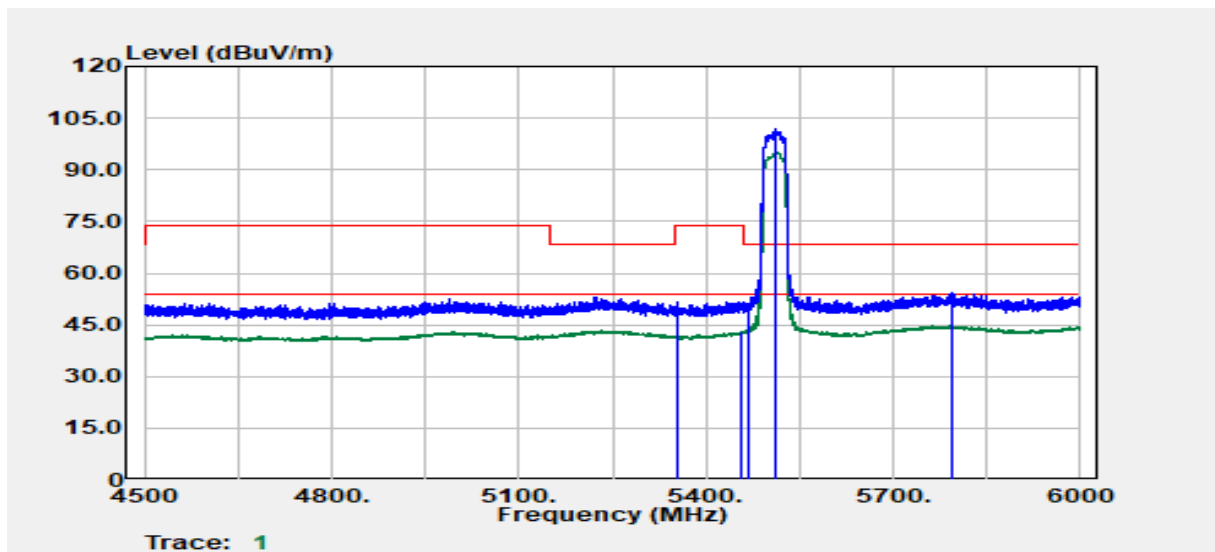

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5352.64	Peak	39.66	12.14	51.80	74.00	-22.20
5454.41	Average	30.57	12.39	42.96	54.00	-11.04
5466.66	Peak	38.95	12.43	51.38	68.20	-16.82
5510.00	Peak	89.20	12.62	101.82	--	--
5510.00	Average	82.45	12.62	95.07	--	--
5793.22	Peak	40.08	14.11	54.19	68.20	-14.01


Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

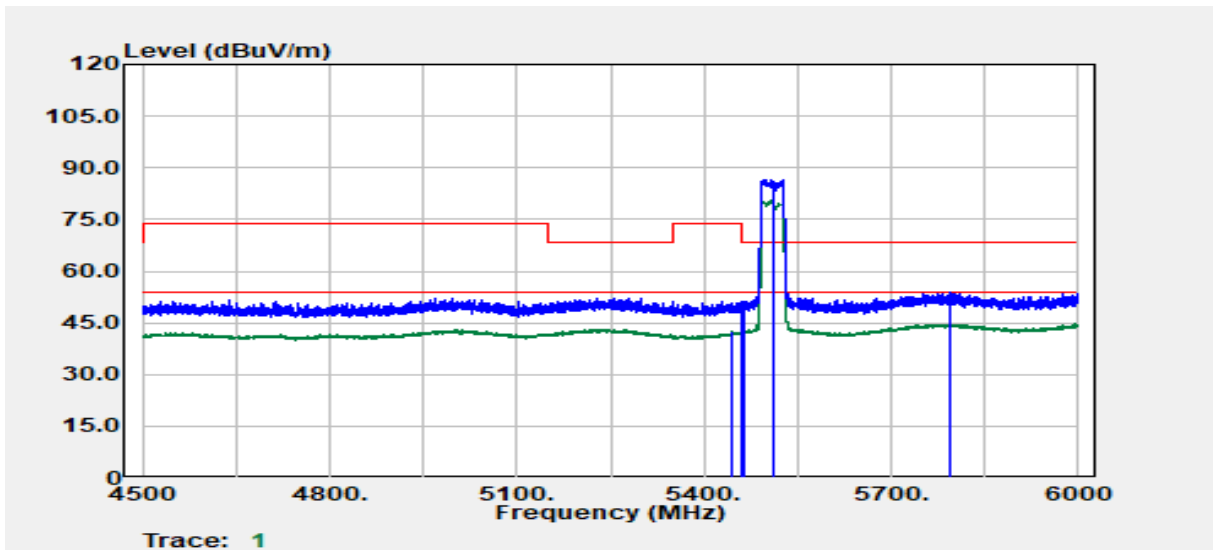

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5445.16	Average	30.00	12.37	42.37	54.00	-11.63
5458.91	Peak	38.91	12.41	51.32	74.00	-22.68
5465.16	Peak	38.94	12.43	51.37	68.20	-16.83
5510.00	Peak	74.02	12.62	86.64	--	--
5510.00	Average	67.90	12.62	80.52	--	--
5792.47	Peak	39.71	14.11	53.82	68.20	-14.38




Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

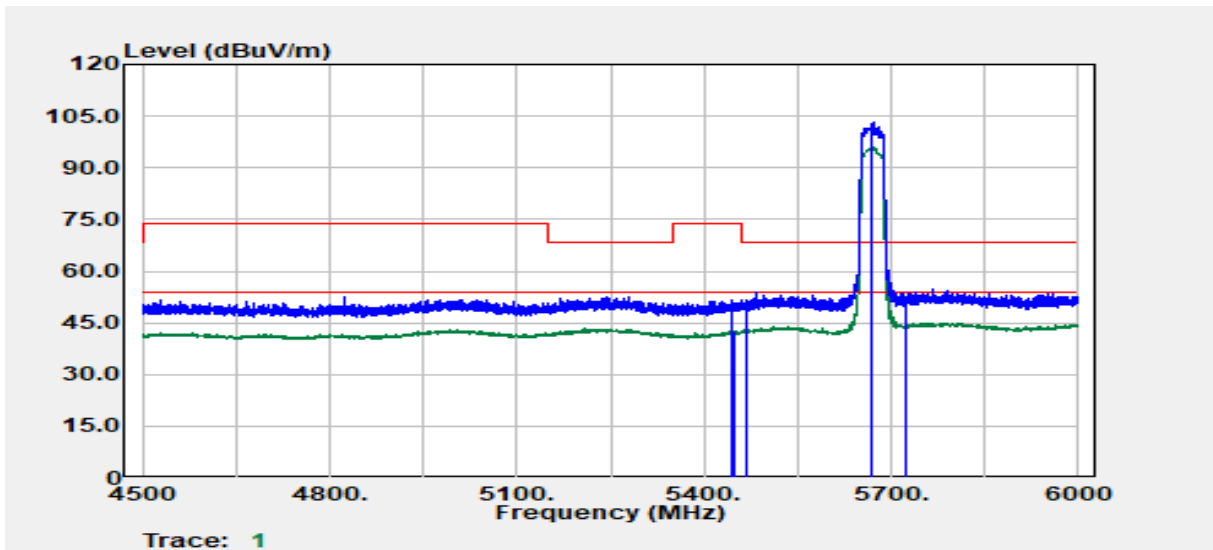


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5444.16	Peak	39.42	12.37	51.79	74.00	-22.21
5448.66	Average	30.34	12.37	42.71	54.00	-11.29
5467.41	Peak	38.97	12.44	51.41	68.20	-16.79
5670.00	Peak	89.64	13.39	103.03	--	--
5670.00	Average	82.77	13.39	96.16	--	--
5725.00	Peak	36.82	13.69	50.51	68.20	-17.69

Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	23.1(°C) / 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

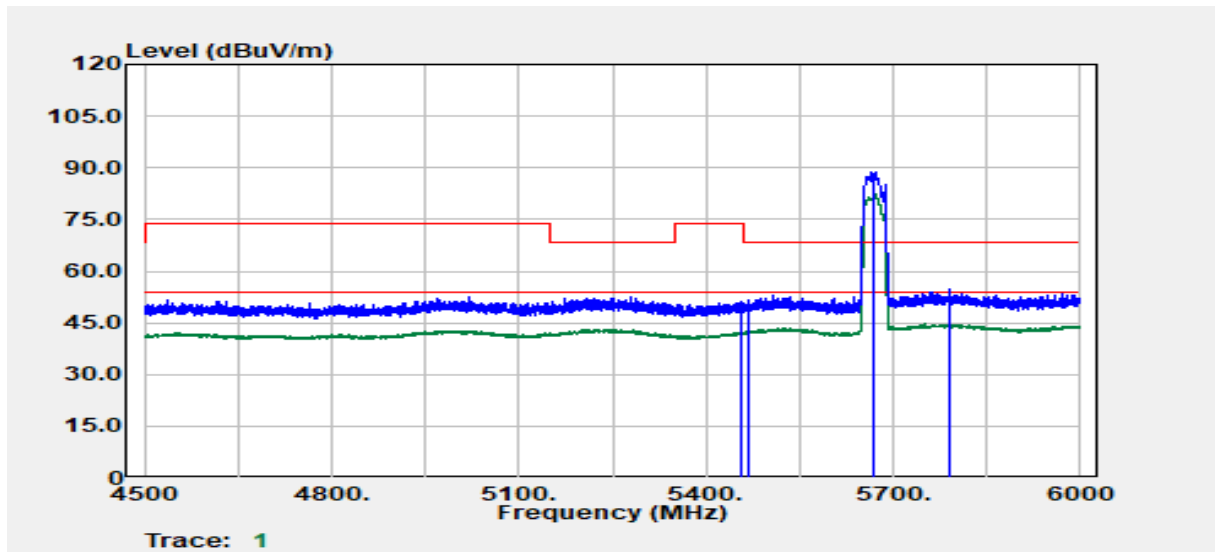


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5457.16	Peak	38.64	12.40	51.04	74.00	-22.96
5457.91	Average	29.90	12.40	42.30	54.00	-11.70
5468.66	Peak	39.21	12.44	51.65	68.20	-16.55
5670.00	Peak	75.32	13.39	88.71	--	--
5670.00	Average	68.97	13.39	82.36	--	--
5789.72	Peak	40.48	14.09	54.57	68.20	-13.63

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.1(°C) / 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

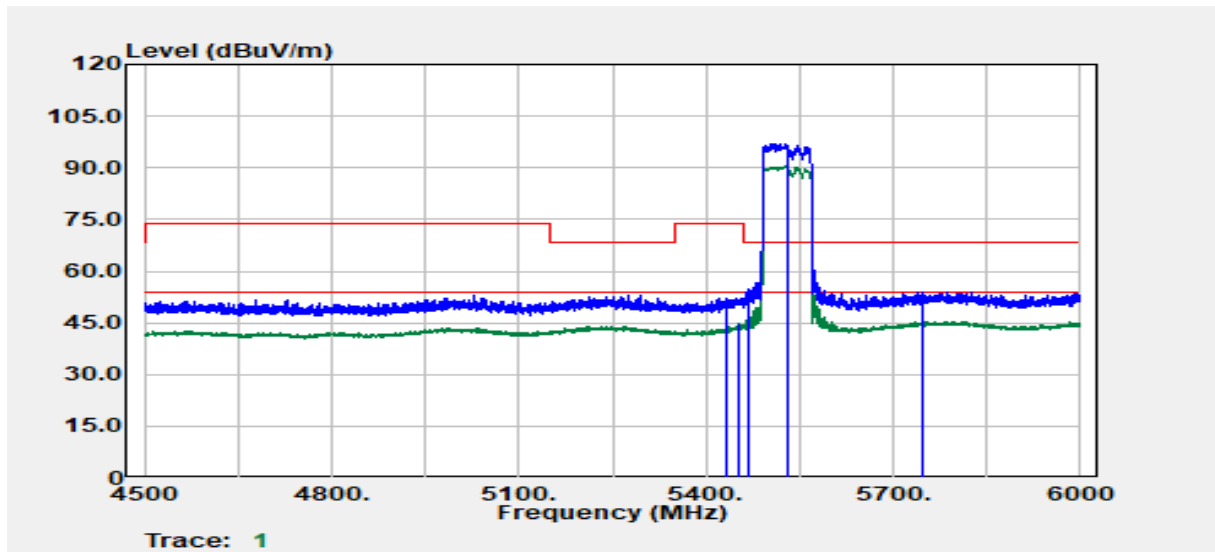


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5432.40	Peak	39.87	12.36	52.23	74.00	-21.77
5453.70	Average	32.28	12.39	44.67	54.00	-9.33
5469.60	Peak	42.29	12.44	54.73	68.20	-13.47
5530.00	Peak	84.35	12.77	97.12	--	--
5530.00	Average	77.73	12.77	90.50	--	--
5746.80	Peak	40.26	13.80	54.06	68.20	-14.14

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

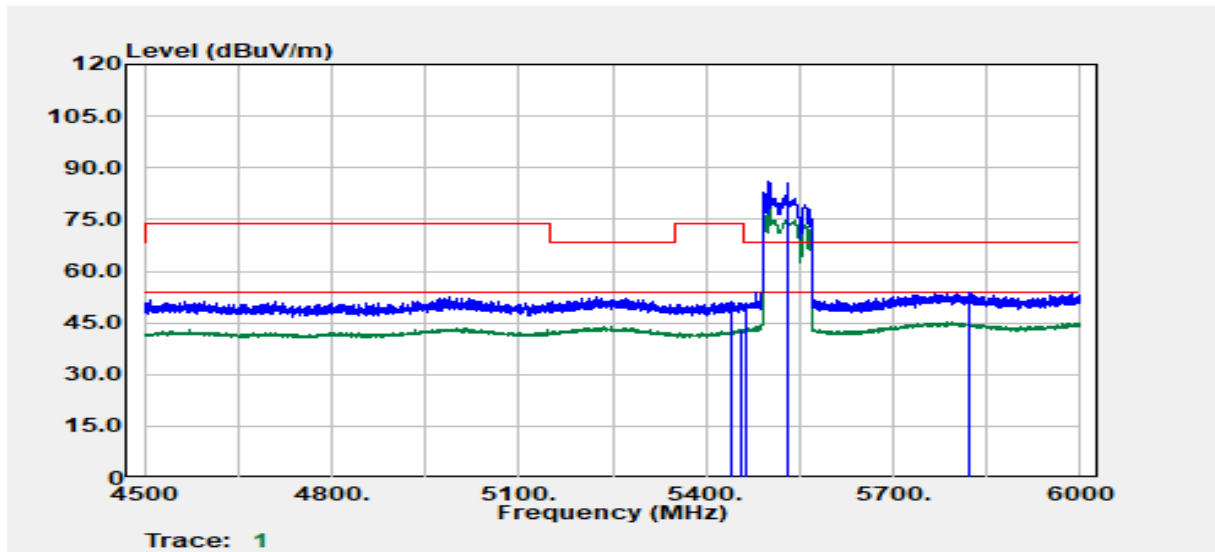


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5442.30	Peak	38.91	12.37	51.28	74.00	-22.72
5458.20	Average	30.66	12.40	43.07	54.00	-10.93
5466.00	Peak	38.22	12.43	50.65	68.20	-17.55
5530.00	Peak	73.05	12.77	85.82	--	--
5530.00	Average	66.45	12.77	79.22	--	--
5821.50	Peak	39.63	14.10	53.73	68.20	-14.47

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	23.1(°C) / 60%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

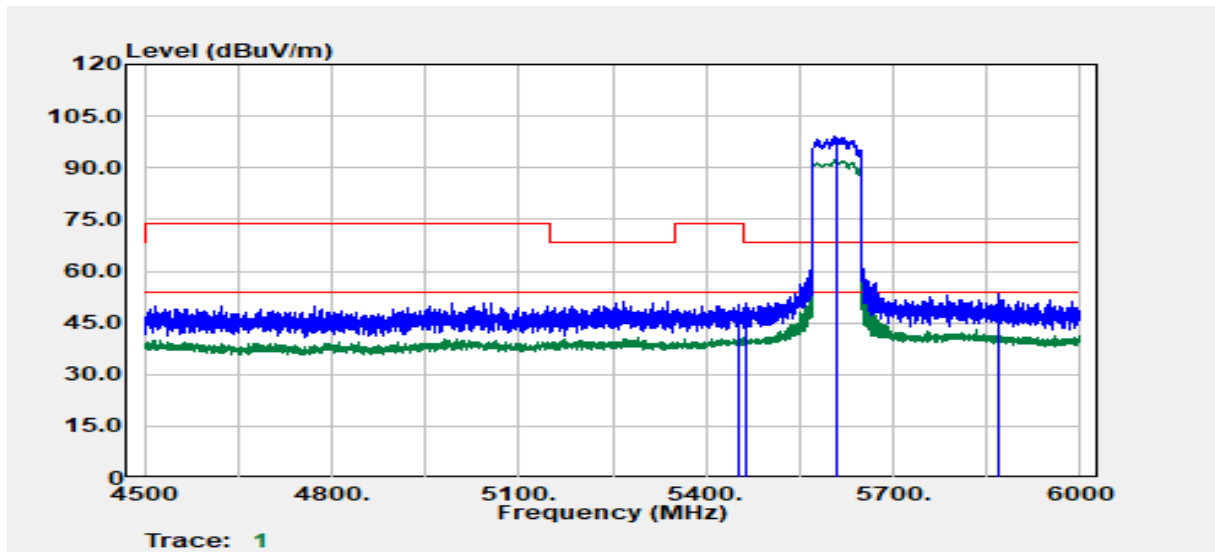


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5452.80	Peak	37.91	12.38	50.30	74.00	-23.70
5454.00	Average	28.51	12.39	40.90	54.00	-13.10
5463.60	Peak	38.40	12.42	50.82	68.20	-17.38
5610.00	Peak	86.32	12.92	99.24	--	--
5610.00	Average	79.67	12.92	92.59	--	--
5867.10	Peak	39.38	14.02	53.40	68.20	-14.80

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

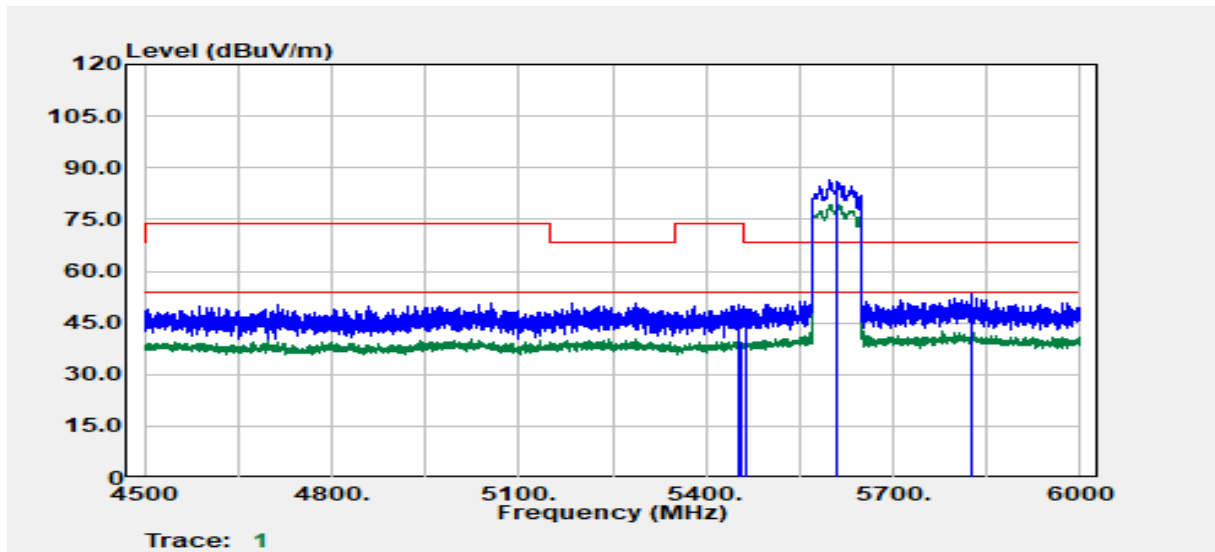


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5453.70	Peak	37.88	12.39	50.27	74.00	-23.73
5457.00	Average	27.09	12.40	39.49	54.00	-14.51
5465.10	Peak	36.55	12.43	48.98	68.20	-19.22
5610.00	Peak	73.58	12.92	86.50	--	--
5610.00	Average	66.37	12.92	79.29	--	--
5826.90	Peak	39.17	14.08	53.25	68.20	-14.95

Test Mode	IEEE 802.11ac VHT160 / 5570 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

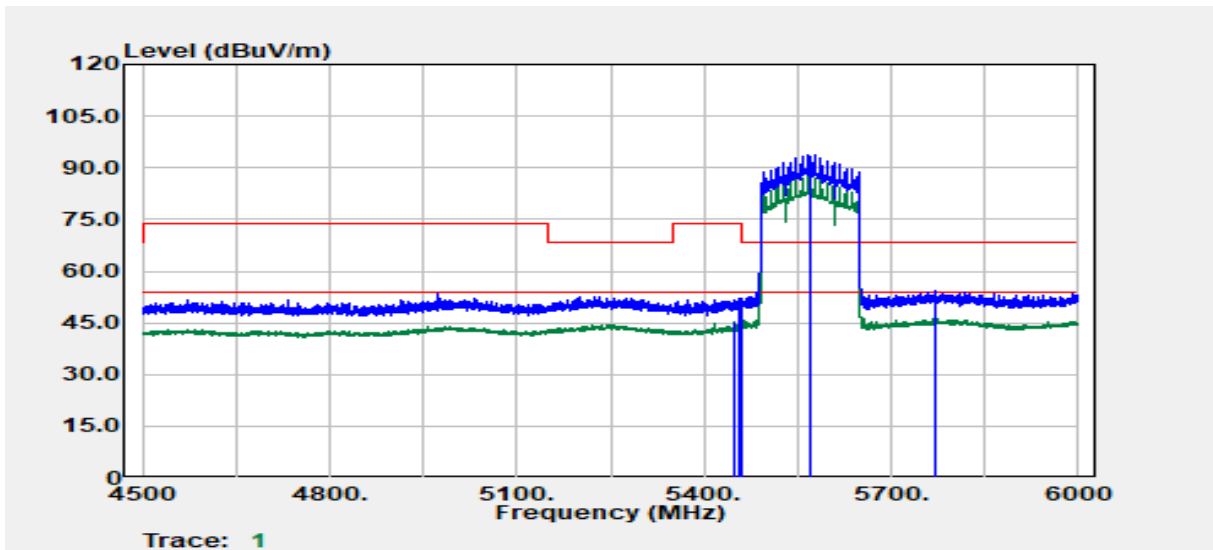

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5447.40	Average	32.98	12.37	45.35	54.00	-8.65
5456.10	Peak	39.59	12.40	51.99	74.00	-22.01
5461.80	Peak	39.78	12.42	52.20	68.20	-16.00
5570.00	Peak	81.04	12.88	93.92	--	--
5570.00	Average	74.66	12.88	87.54	--	--
5771.70	Peak	40.31	13.97	54.28	68.20	-13.92


Test Mode	IEEE 802.11ac VHT160 / 5570 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

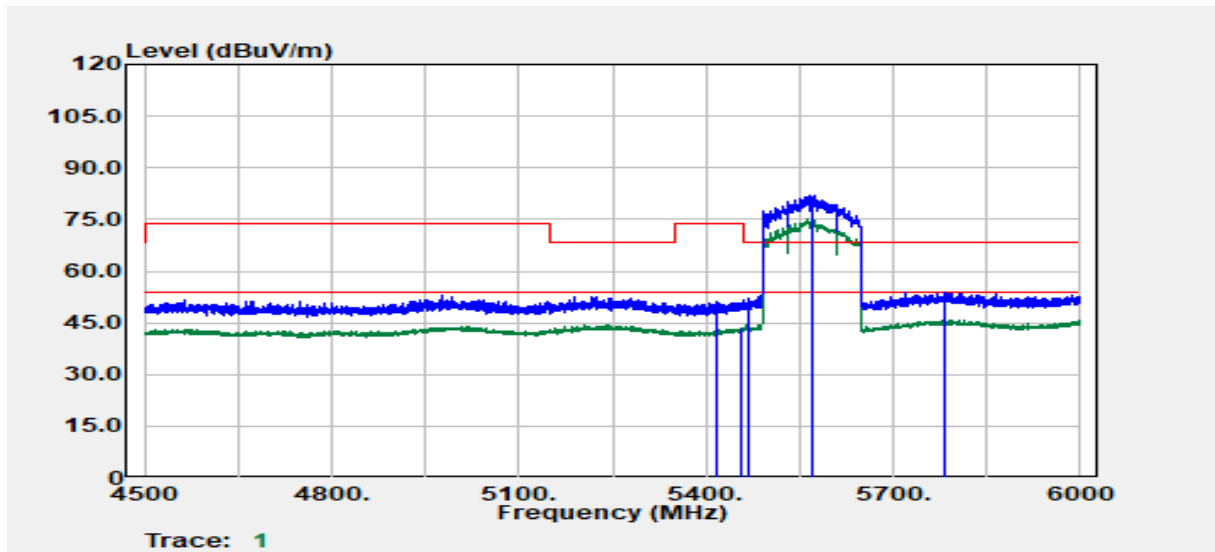

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5415.30	Peak	38.65	12.34	50.99	74.00	-23.01
5456.70	Average	31.10	12.40	43.50	54.00	-10.50
5467.80	Peak	39.74	12.44	52.18	68.20	-16.02
5570.00	Peak	69.03	12.88	81.91	--	--
5570.00	Average	62.38	12.88	75.26	--	--
5781.00	Peak	39.88	14.03	53.91	68.20	-14.29




Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

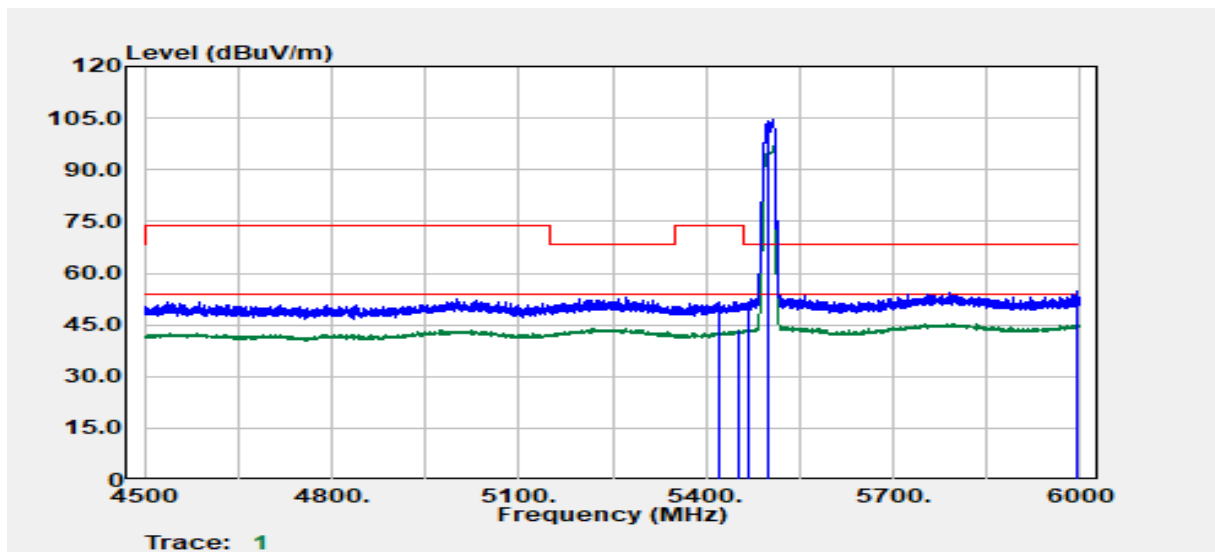


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5419.80	Peak	39.38	12.34	51.72	74.00	-22.28
5454.30	Average	31.28	12.39	43.67	54.00	-10.33
5467.80	Peak	39.12	12.44	51.56	68.20	-16.64
5500.00	Peak	92.13	12.55	104.68	--	--
5500.00	Average	84.39	12.55	96.94	--	--
5992.80	Peak	40.46	14.15	54.61	68.20	-13.59

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

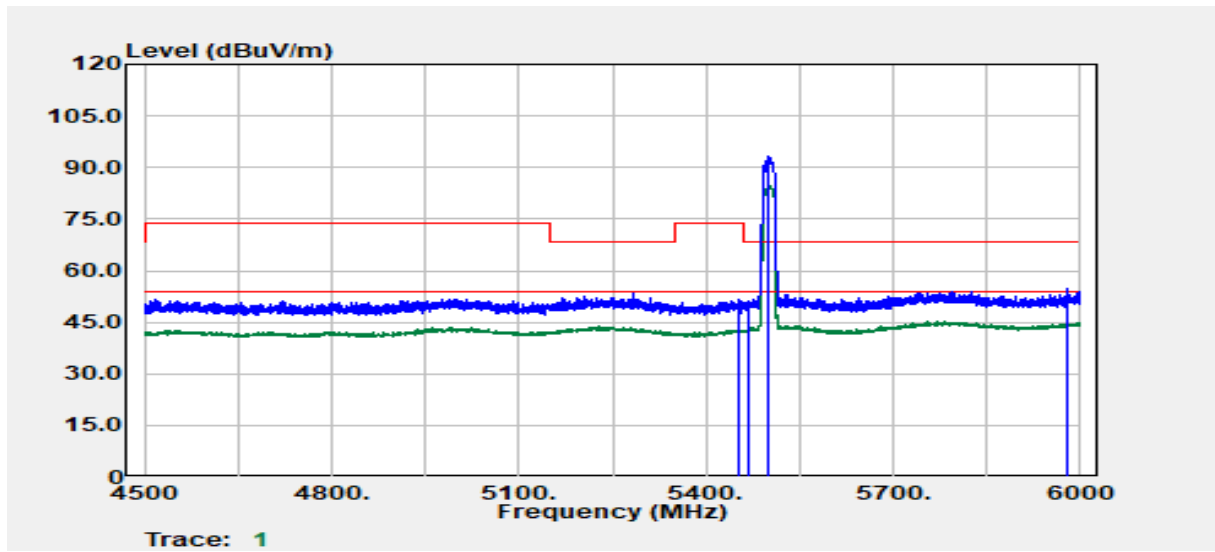


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.30	Average	30.53	12.38	42.91	54.00	-11.09
5453.70	Peak	39.23	12.39	51.62	74.00	-22.38
5466.90	Peak	38.64	12.43	51.07	68.20	-17.13
5500.00	Peak	80.87	12.55	93.42	--	--
5500.00	Average	72.35	12.55	84.90	--	--
5980.50	Peak	40.63	14.15	54.78	68.20	-13.42

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

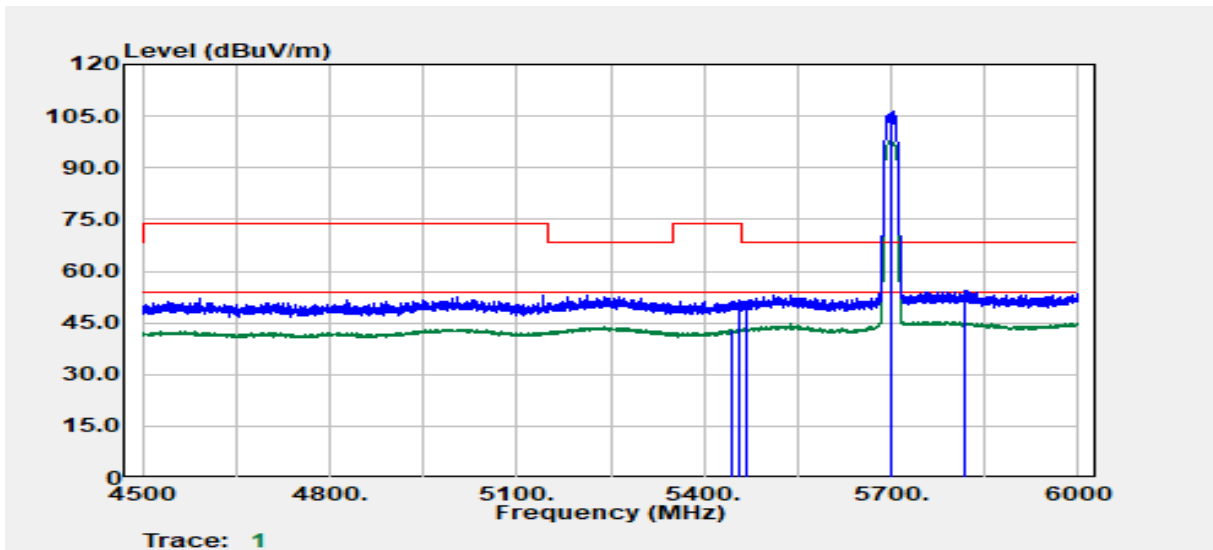


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5443.80	Average	30.63	12.37	43.00	54.00	-11.00
5457.90	Peak	39.38	12.40	51.78	74.00	-22.22
5468.70	Peak	38.74	12.44	51.18	68.20	-17.02
5700.00	Peak	92.97	13.56	106.53	--	--
5700.00	Average	84.21	13.56	97.77	--	--
5816.70	Peak	40.14	14.11	54.25	68.20	-13.95

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

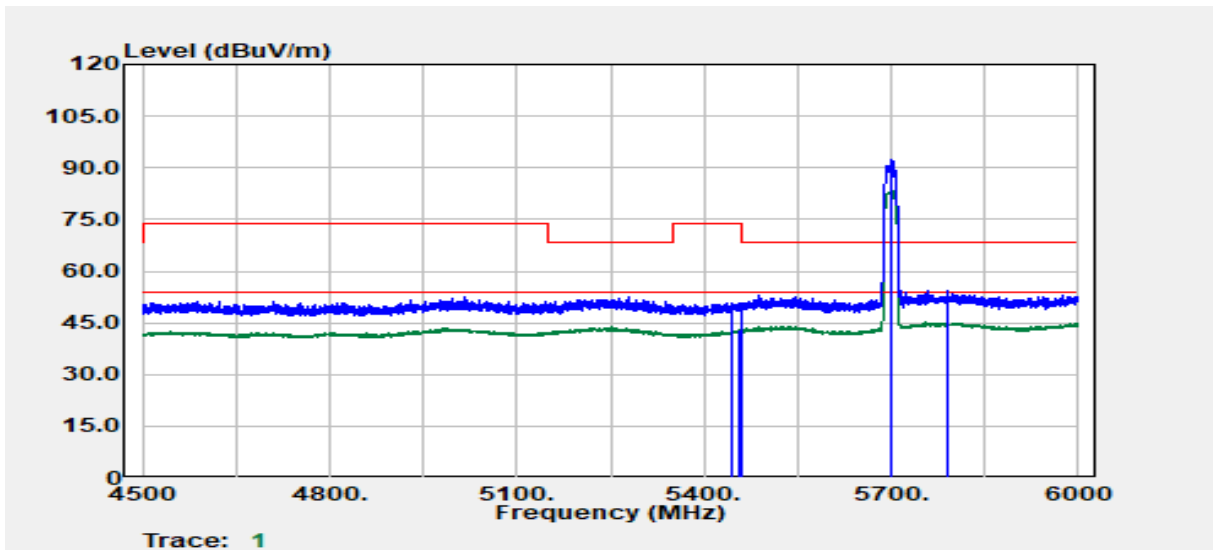


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5445.90	Peak	38.48	12.37	50.85	74.00	-23.15
5457.60	Average	30.66	12.40	43.06	54.00	-10.94
5460.90	Peak	38.41	12.41	50.82	68.20	-17.38
5700.00	Peak	78.80	13.56	92.36	--	--
5700.00	Average	70.13	13.56	83.69	--	--
5790.60	Peak	40.46	14.10	54.55	68.20	-13.65

Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

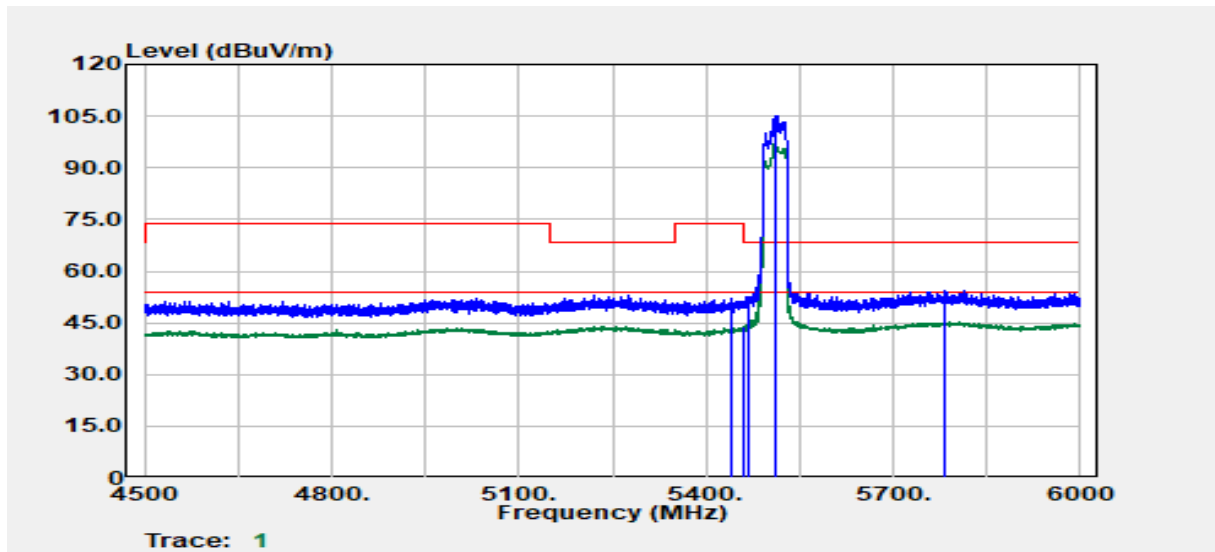


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5441.66	Peak	39.61	12.37	51.97	74.00	-22.03
5459.16	Average	31.44	12.41	43.84	54.00	-10.16
5469.66	Peak	40.24	12.44	52.68	68.20	-15.52
5510.00	Peak	92.57	12.62	105.19	--	--
5510.00	Average	84.49	12.62	97.12	--	--
5781.46	Peak	40.40	14.03	54.43	68.20	-13.77

Test Mode	IEEE 802.11ax HE40 / 5510 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

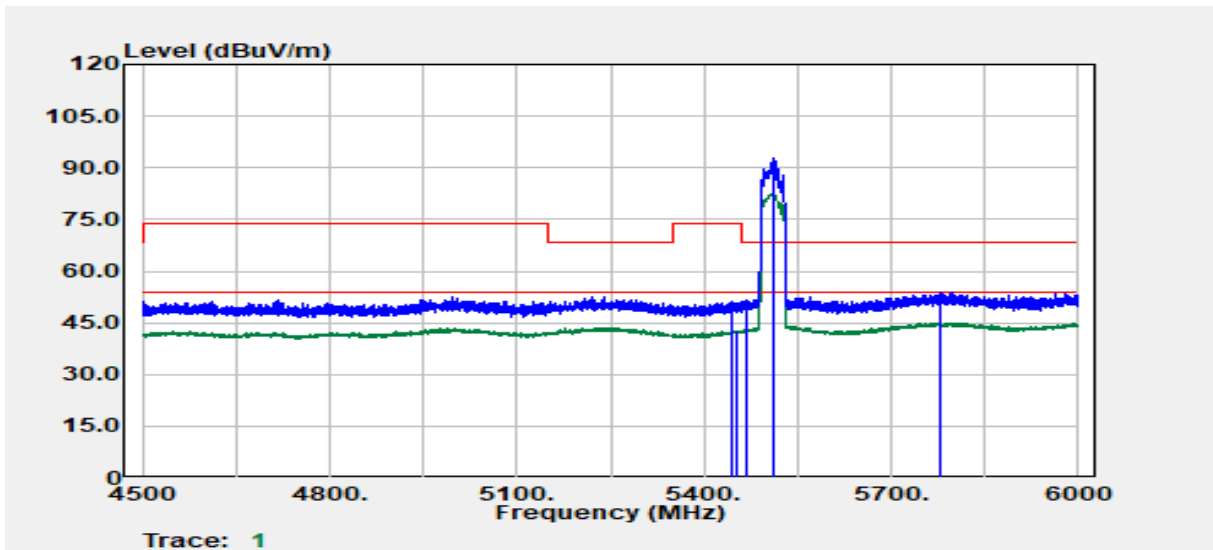


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5443.16	Peak	38.82	12.37	51.19	74.00	-22.81
5450.91	Average	30.38	12.38	42.76	54.00	-11.24
5466.66	Peak	39.18	12.43	51.61	68.20	-16.59
5510.00	Peak	80.21	12.62	92.83	--	--
5510.00	Average	69.95	12.62	82.58	--	--
5777.96	Peak	39.75	14.01	53.76	68.20	-14.44

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

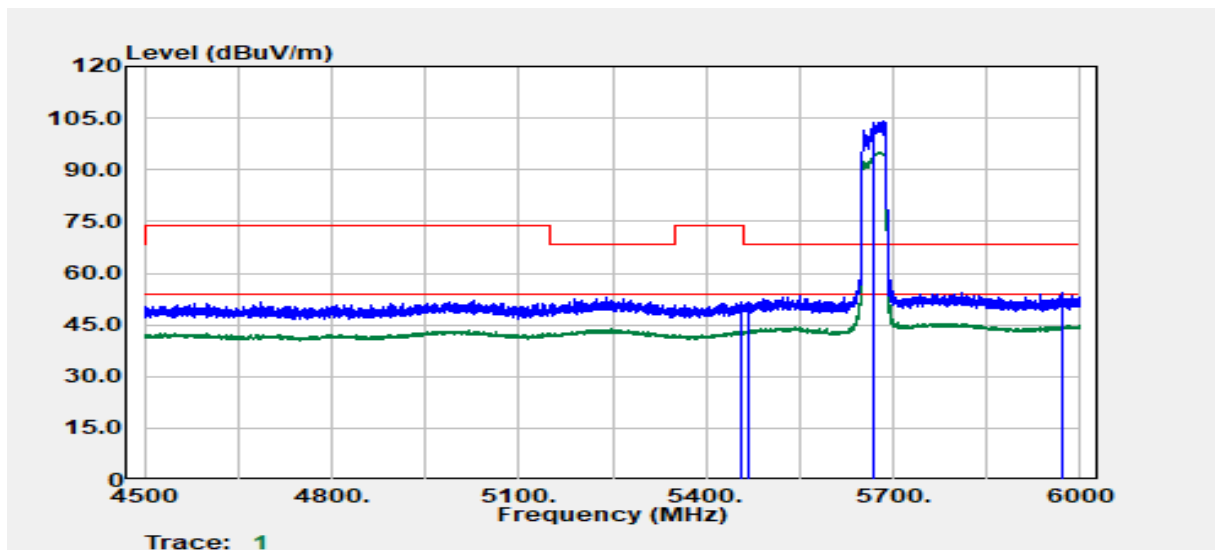

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5456.41	Average	30.99	12.40	43.39	54.00	-10.61
5457.91	Peak	39.32	12.40	51.73	74.00	-22.27
5466.91	Peak	39.01	12.43	51.45	68.20	-16.75
5670.00	Peak	90.80	13.39	104.19	--	--
5670.00	Average	81.85	13.39	95.24	--	--
5972.00	Peak	40.31	14.16	54.47	68.20	-13.73


Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

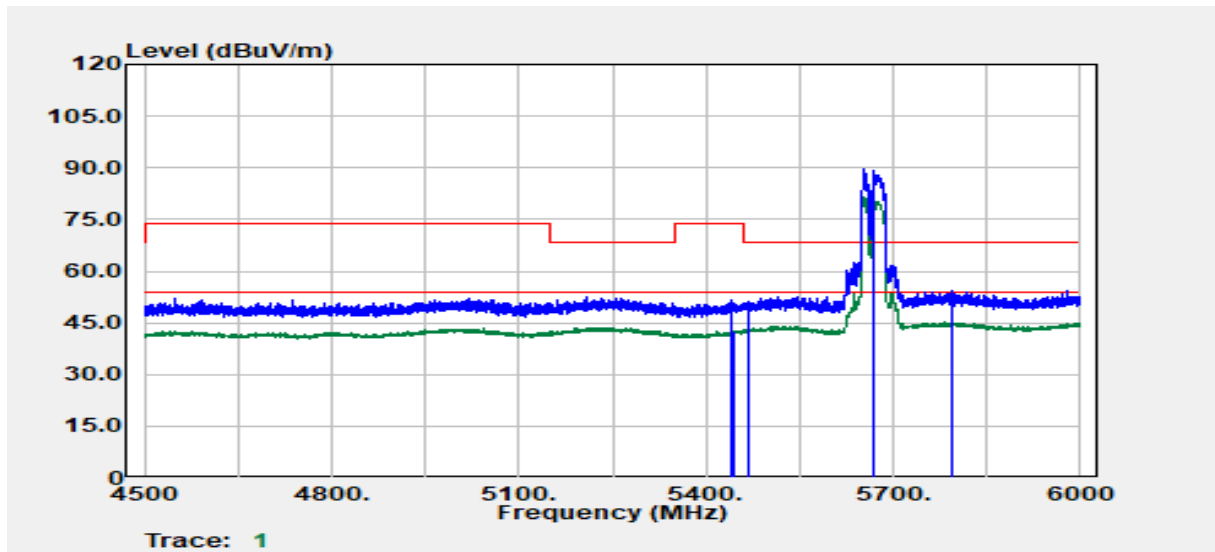

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5440.66	Peak	39.20	12.36	51.57	74.00	-22.43
5445.66	Average	30.41	12.37	42.78	54.00	-11.22
5468.66	Peak	38.83	12.44	51.27	68.20	-16.93
5670.00	Peak	76.07	13.39	89.46	--	--
5670.00	Average	68.10	13.39	81.49	--	--
5793.47	Peak	40.16	14.12	54.28	68.20	-13.92




Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

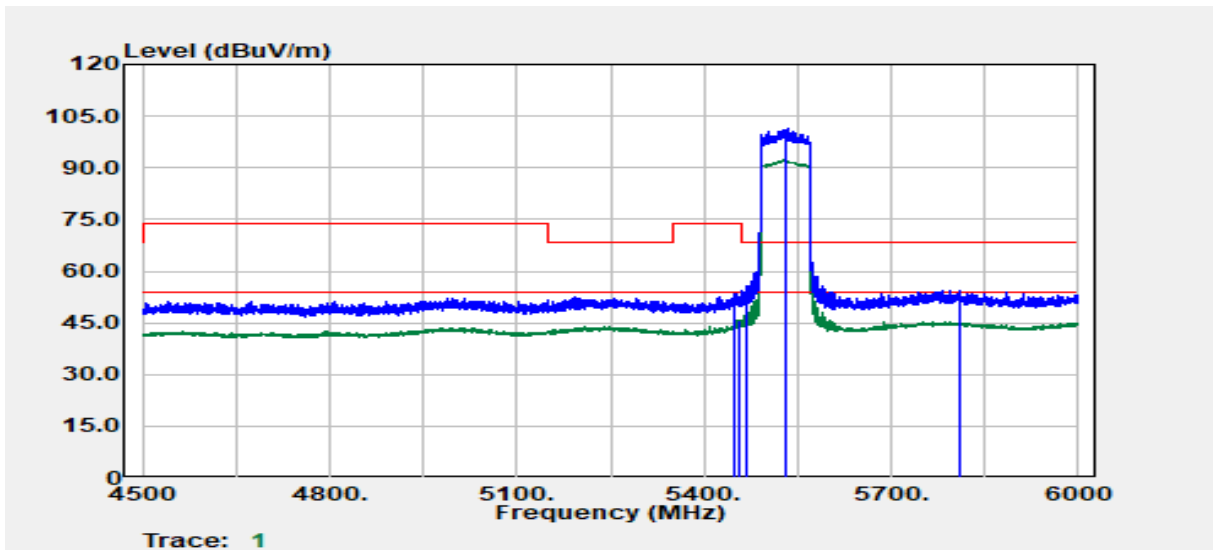


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5449.50	Peak	41.00	12.37	53.38	74.00	-20.62
5457.60	Average	33.46	12.40	45.86	54.00	-8.14
5469.30	Peak	43.40	12.44	55.84	68.20	-12.36
5530.00	Peak	88.44	12.77	101.21	--	--
5530.00	Average	79.78	12.77	92.55	--	--
5811.30	Peak	40.25	14.13	54.38	68.20	-13.82

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

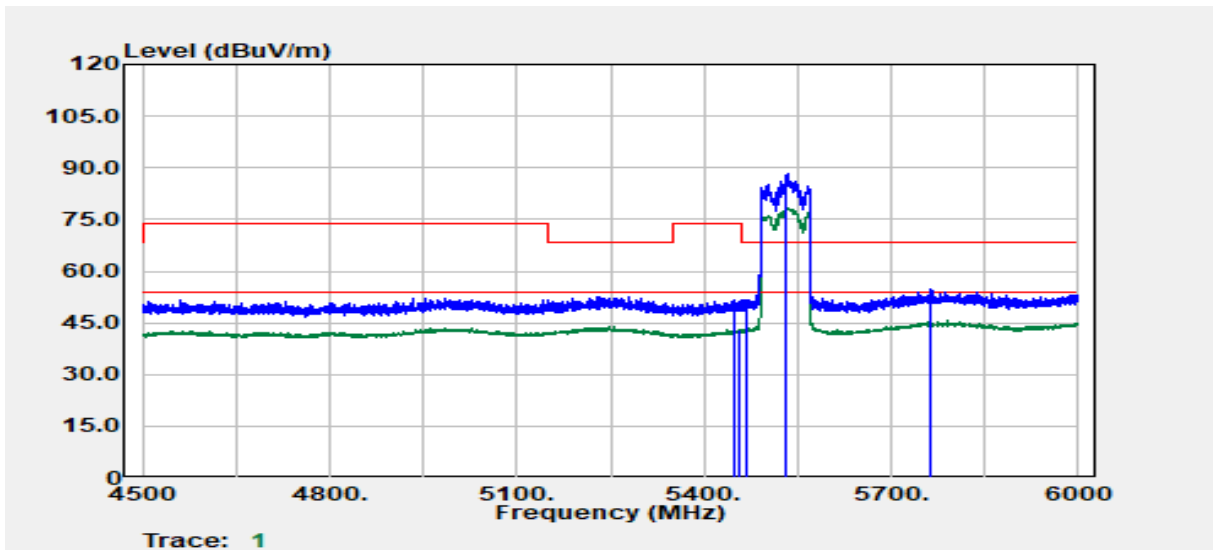


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5449.50	Peak	39.08	12.37	51.46	74.00	-22.54
5457.00	Average	30.59	12.40	42.99	54.00	-11.01
5469.60	Peak	39.20	12.44	51.64	68.20	-16.56
5530.00	Peak	75.31	12.77	88.08	--	--
5530.00	Average	65.72	12.77	78.49	--	--
5763.60	Peak	41.03	13.91	54.94	68.20	-13.26

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

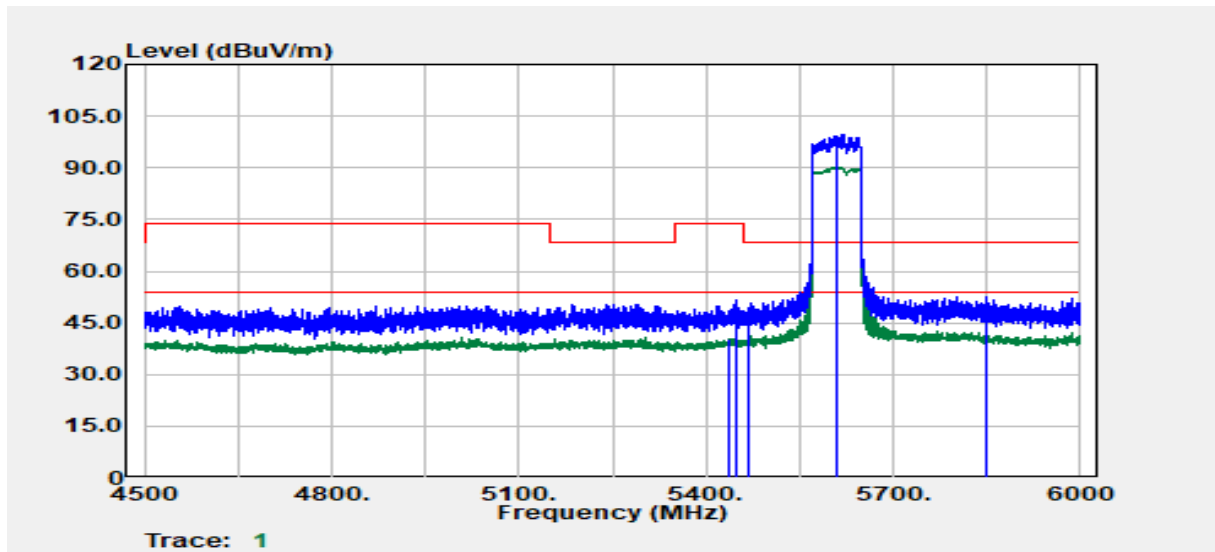


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5436.60	Average	28.11	12.36	40.47	54.00	-13.53
5448.60	Peak	39.08	12.37	51.45	74.00	-22.55
5467.20	Peak	36.85	12.44	49.28	68.20	-18.92
5610.00	Peak	86.68	12.92	99.60	--	--
5610.00	Average	77.44	12.92	90.36	--	--
5850.60	Peak	38.72	14.02	52.74	68.20	-15.46

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	23.1(°C) / 60%RH
Test Item	Band Edge	Test Date	May 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

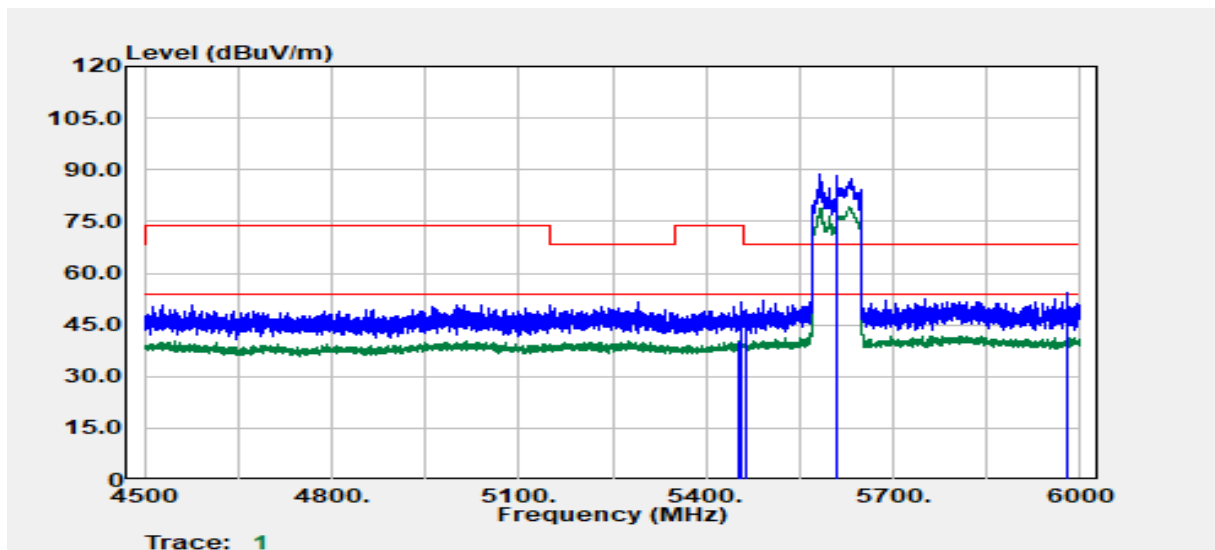


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5451.60	Average	27.93	12.38	40.31	54.00	-13.69
5456.10	Peak	39.02	12.40	51.41	74.00	-22.59
5463.00	Peak	37.09	12.42	49.51	68.20	-18.69
5610.00	Peak	75.66	12.92	88.58	--	--
5610.00	Average	66.30	12.92	79.22	--	--
5980.20	Peak	40.13	14.15	54.28	68.20	-13.92

Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

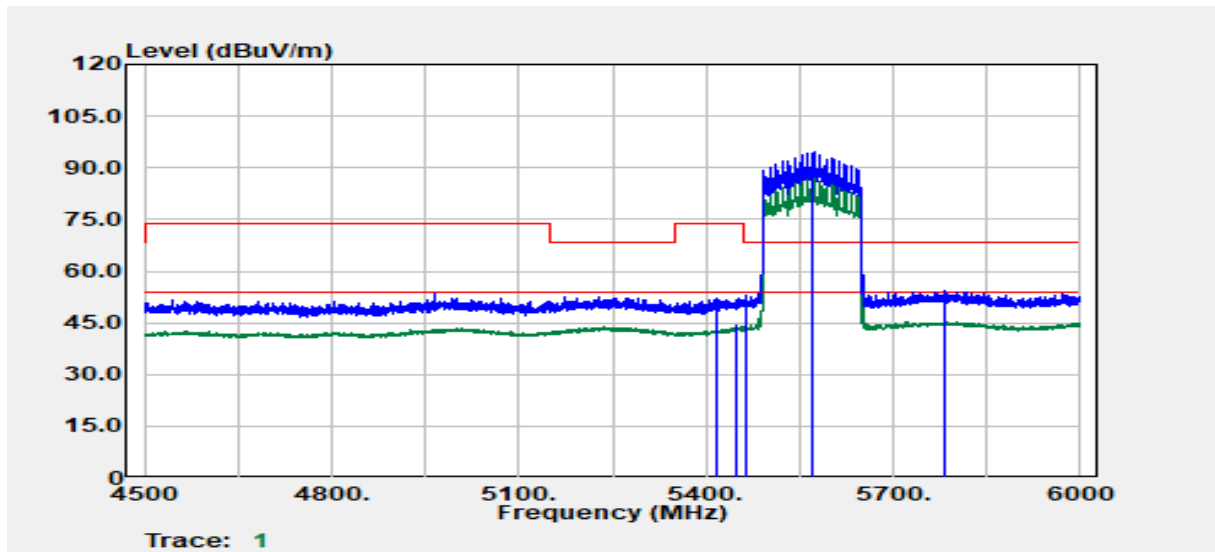

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5415.60	Peak	39.56	12.34	51.90	74.00	-22.10
5449.50	Average	31.88	12.37	44.25	54.00	-9.75
5464.20	Peak	40.43	12.42	52.85	68.20	-15.35
5570.00	Peak	81.54	12.88	94.42	--	--
5570.00	Average	74.30	12.88	87.18	--	--
5781.00	Peak	40.24	14.03	54.27	68.20	-13.93


Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

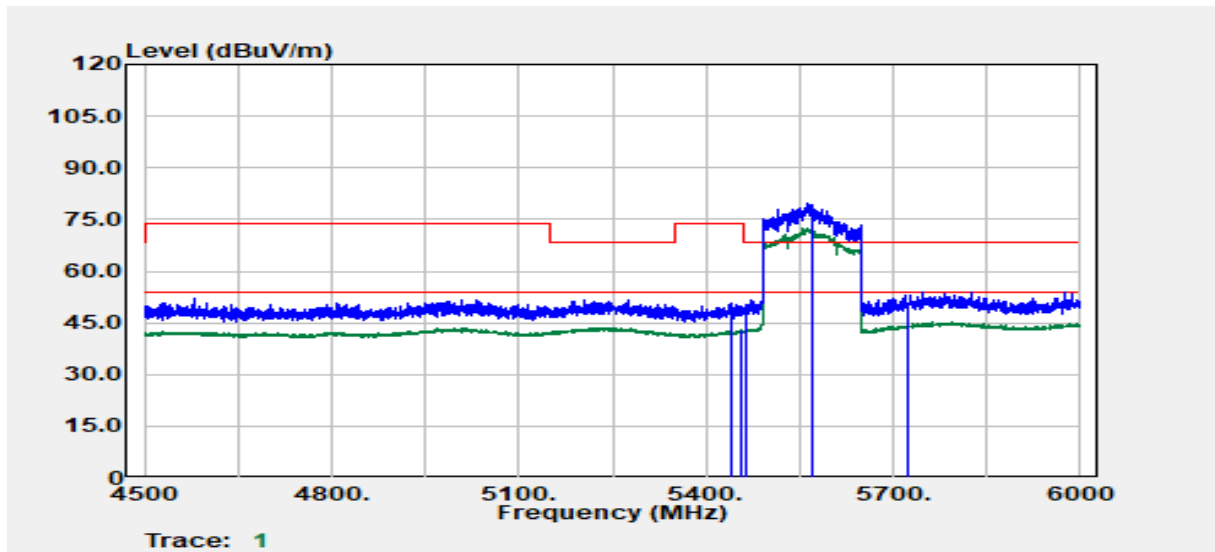

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5441.10	Peak	38.29	12.37	50.66	74.00	-23.34
5455.80	Average	30.63	12.40	43.03	54.00	-10.97
5466.00	Peak	37.82	12.43	50.25	68.20	-17.95
5570.00	Peak	67.00	12.88	79.88	--	--
5570.00	Average	59.61	12.88	72.49	--	--
5725.00	Peak	36.99	13.69	50.68	68.20	-17.52


**Test Data for UNII-3**

Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

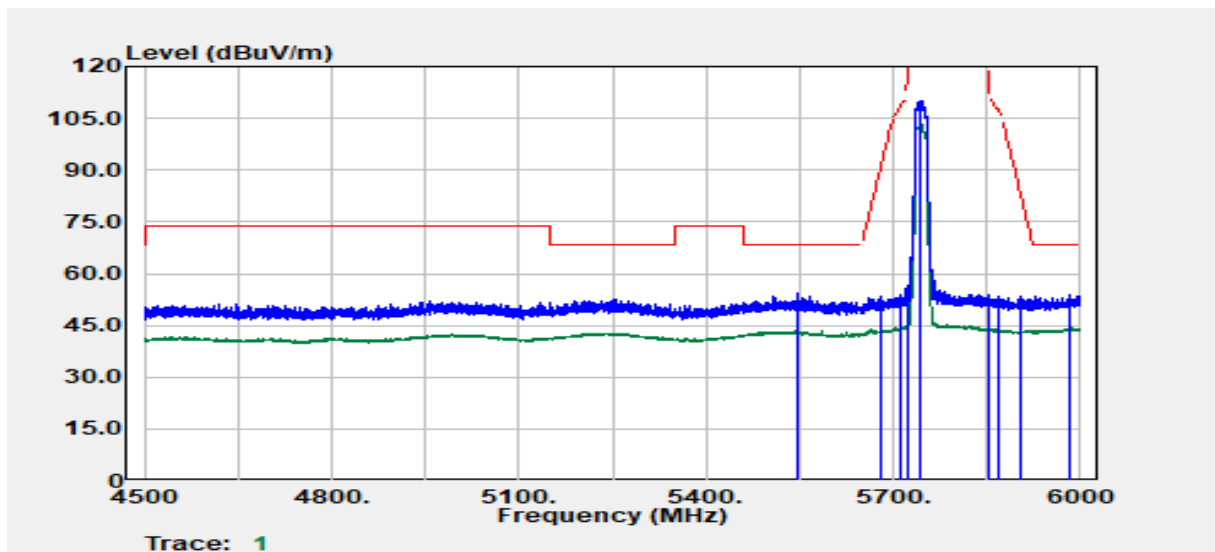

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5547.68	Peak	41.34	12.90	54.23	68.20	-13.97
5678.45	Peak	39.78	13.44	53.22	89.29	-36.07
5712.70	Peak	40.31	13.63	53.93	108.76	-54.83
5722.70	Peak	43.00	13.68	56.68	116.97	-60.29
5745.00	Peak	96.25	13.79	110.05	--	--
5745.00	Average	89.39	13.79	103.19	--	--
5851.23	Peak	39.71	14.02	53.73	119.41	-65.68
5868.98	Peak	39.23	14.02	53.25	106.88	-53.63
5902.48	Peak	39.25	14.04	53.28	84.82	-31.54
5984.75	Peak	39.59	14.15	53.74	68.20	-14.46


Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

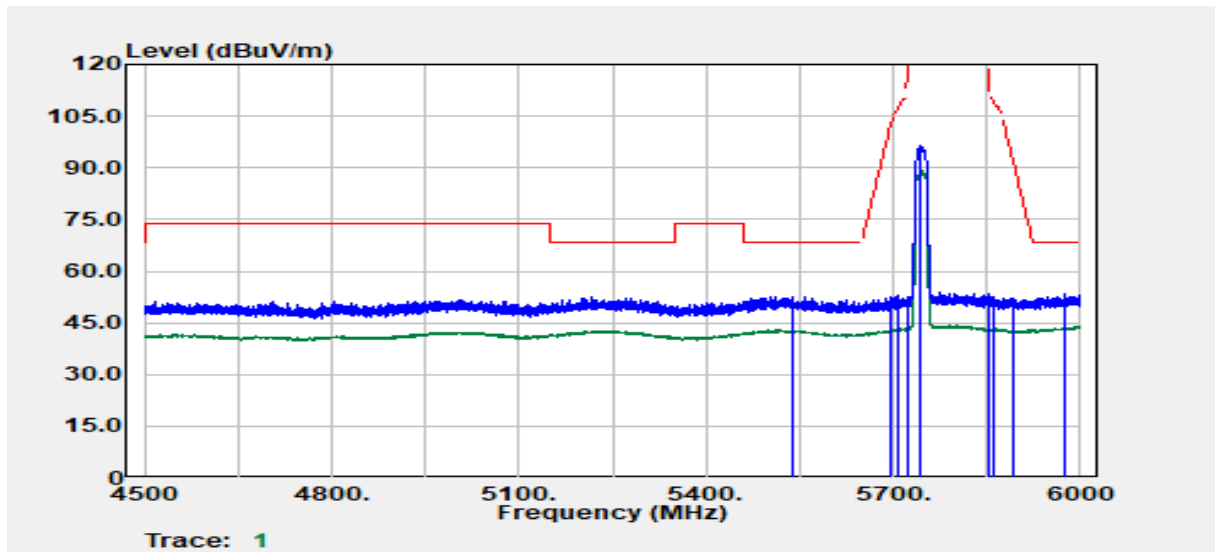

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5539.92	Peak	39.80	12.84	52.65	68.20	-15.55
5695.70	Peak	38.95	13.54	52.49	102.03	-49.54
5708.95	Peak	39.35	13.61	52.96	107.71	-54.75
5724.20	Peak	39.03	13.69	52.71	120.39	-67.67
5745.00	Peak	82.73	13.79	96.52	--	--
5745.00	Average	75.68	13.79	89.47	--	--
5852.73	Peak	39.62	14.02	53.64	115.98	-62.34
5860.48	Peak	38.71	14.02	52.73	109.26	-56.54
5892.48	Peak	38.19	14.03	52.22	92.23	-40.01
5973.75	Peak	39.07	14.16	53.23	68.20	-14.97




Test Mode	IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

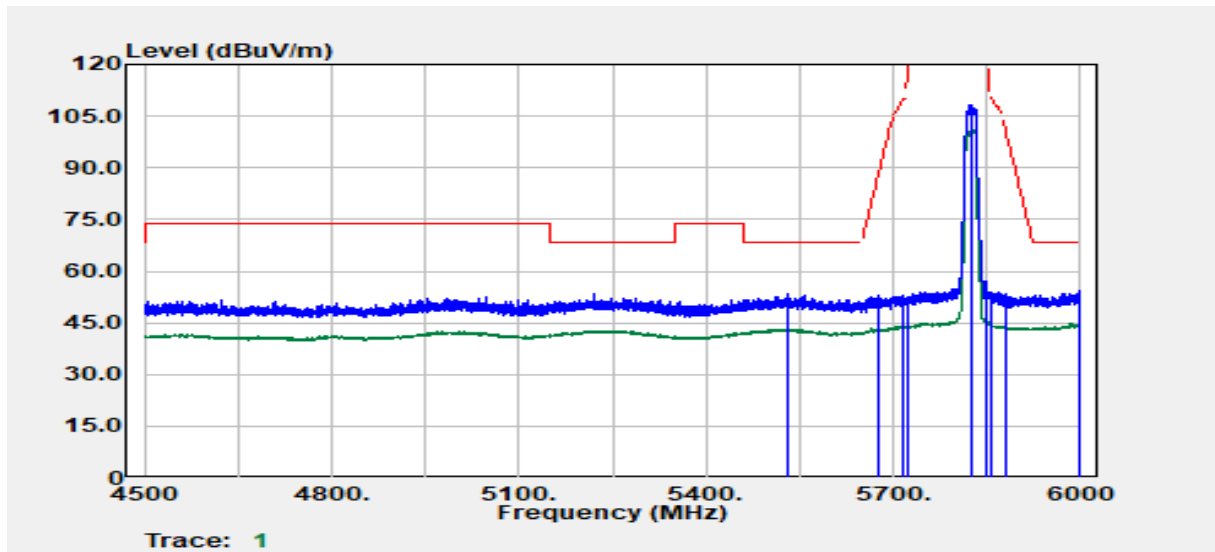


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5529.17	Peak	40.45	12.76	53.22	68.20	-14.98
5675.95	Peak	39.66	13.43	53.09	87.44	-34.35
5715.45	Peak	39.23	13.64	52.87	109.53	-56.66
5723.95	Peak	39.02	13.68	52.71	119.82	-67.11
5825.00	Peak	94.21	14.09	108.30	--	--
5825.00	Average	87.01	14.09	101.10	--	--
5850.00	Peak	42.35	14.02	56.37	122.20	-65.83
5856.73	Peak	40.06	14.02	54.08	110.32	-56.23
5882.48	Peak	39.39	14.03	53.41	99.64	-46.23
5999.75	Peak	40.30	14.15	54.45	68.20	-13.75

Test Mode	IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

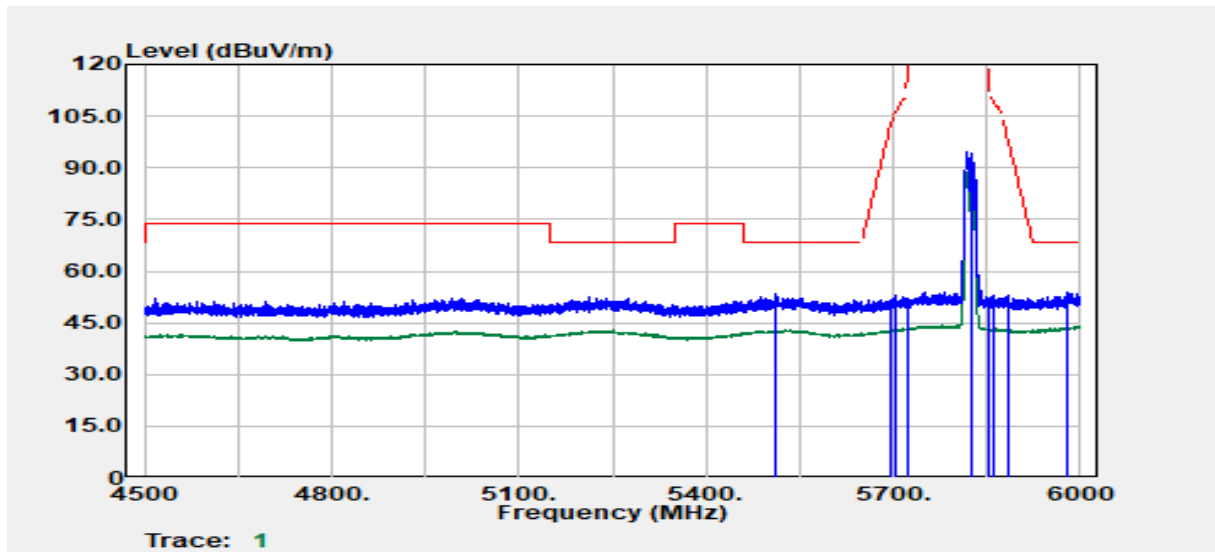


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5512.17	Peak	40.68	12.64	53.32	68.20	-14.88
5695.70	Peak	38.12	13.54	51.65	102.03	-50.38
5704.95	Peak	39.30	13.59	52.88	106.59	-53.71
5721.95	Peak	38.58	13.67	52.25	115.26	-63.00
5825.00	Peak	80.77	14.09	94.86	--	--
5825.00	Average	74.57	14.09	88.66	--	--
5851.23	Peak	38.14	14.02	52.16	119.41	-67.24
5859.23	Peak	39.15	14.02	53.17	109.62	-56.45
5883.73	Peak	38.87	14.03	52.90	98.72	-45.82
5979.75	Peak	39.65	14.15	53.80	68.20	-14.40

Test Mode	IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

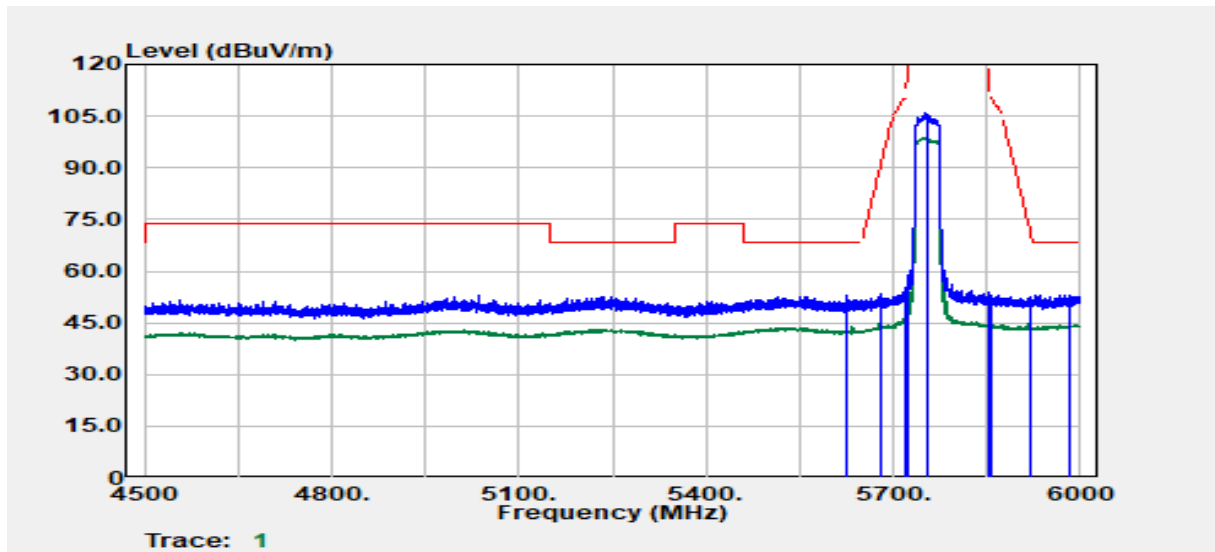


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5626.19	Peak	39.87	13.07	52.94	68.20	-15.26
5680.45	Peak	40.01	13.45	53.46	90.77	-37.31
5718.20	Peak	41.16	13.65	54.81	110.30	-55.49
5724.95	Peak	45.27	13.69	58.96	122.10	-63.14
5755.00	Peak	92.04	13.85	105.90	--	--
5755.00	Average	85.05	13.85	98.91	--	--
5851.23	Peak	39.65	14.02	53.67	119.41	-65.73
5856.23	Peak	38.86	14.02	52.88	110.46	-57.58
5918.49	Peak	38.62	14.08	52.70	73.00	-20.30
5982.75	Peak	39.05	14.15	53.20	68.20	-15.00

Test Mode	IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

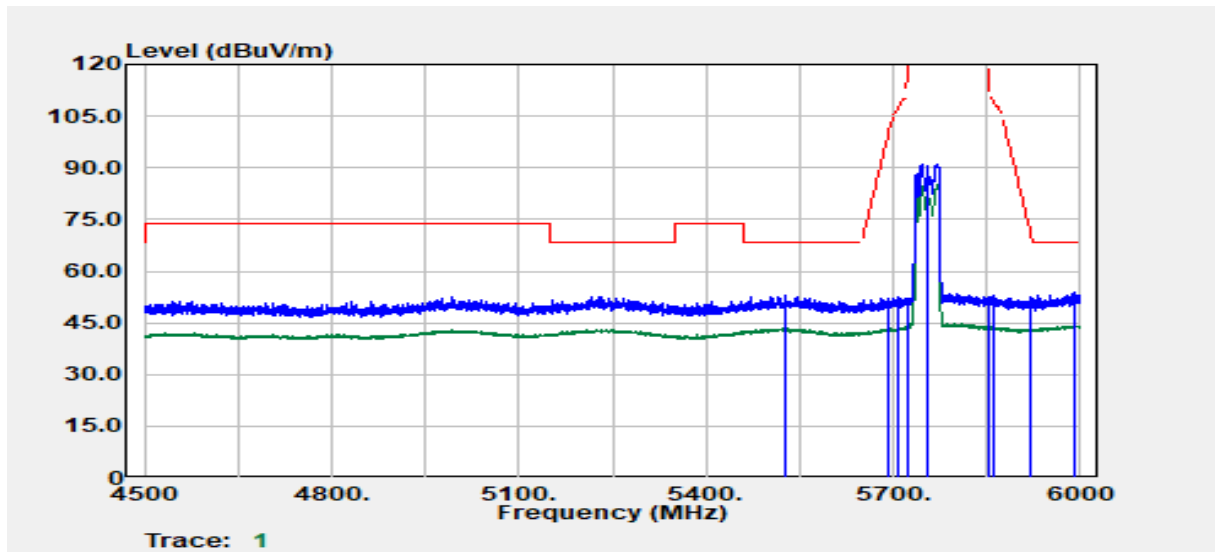


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5525.40	Peak	40.24	12.74	52.98	68.20	-15.22
5691.60	Peak	38.67	13.51	52.19	99.01	-46.82
5709.30	Peak	38.72	13.61	52.32	107.81	-55.48
5724.30	Peak	38.29	13.69	51.97	120.60	-68.63
5755.00	Peak	77.32	13.85	91.18	--	--
5755.00	Average	71.16	13.85	85.01	--	--
5852.10	Peak	38.50	14.02	52.52	117.41	-64.89
5860.20	Peak	38.85	14.02	52.87	109.34	-56.47
5920.50	Peak	38.38	14.08	52.47	71.52	-19.05
5991.30	Peak	39.73	14.15	53.88	68.20	-14.32

Test Mode	IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

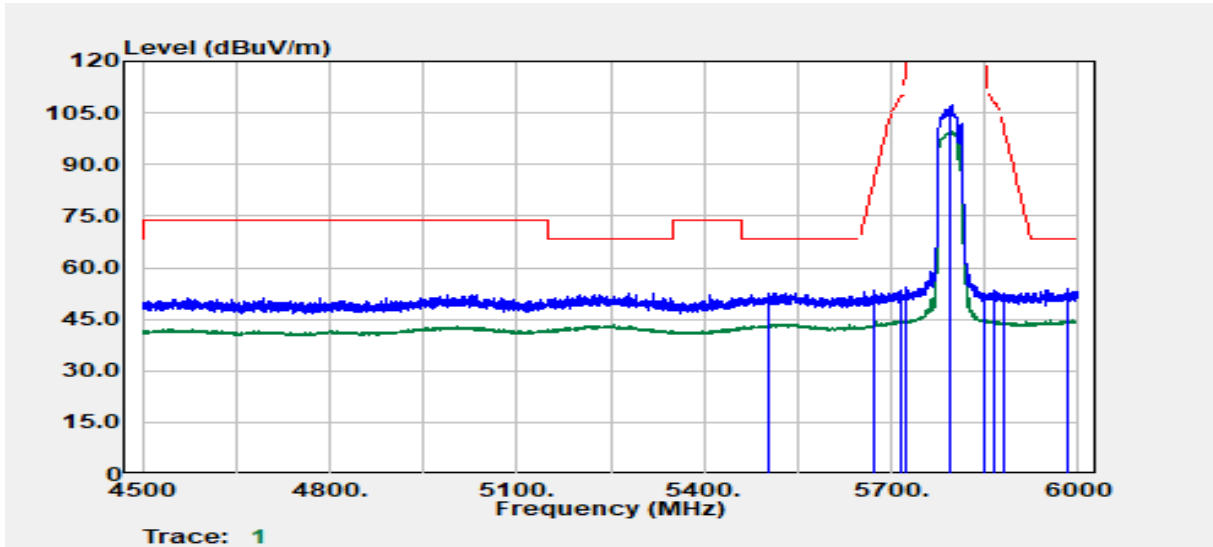


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5504.10	Peak	40.16	12.58	52.74	68.20	-15.46
5670.60	Peak	40.25	13.40	53.65	83.48	-29.83
5714.40	Peak	39.90	13.63	53.53	109.23	-55.70
5723.40	Peak	40.51	13.68	54.19	118.55	-64.36
5795.00	Peak	93.31	14.13	107.43	--	--
5795.00	Average	85.40	14.13	99.53	--	--
5850.30	Peak	38.29	14.02	52.31	121.52	-69.20
5864.10	Peak	39.20	14.02	53.22	108.25	-55.03
5882.10	Peak	38.67	14.03	52.70	99.93	-47.23
5981.70	Peak	39.66	14.15	53.82	68.20	-14.38

Test Mode	IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

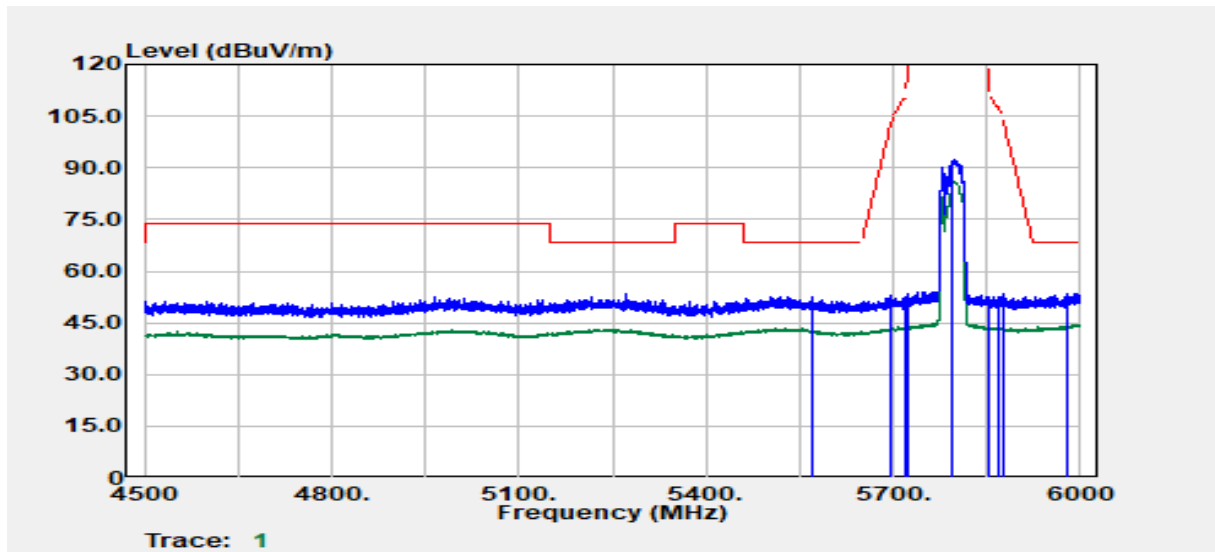


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5568.60	Peak	39.66	12.88	52.55	68.20	-15.65
5695.50	Peak	39.36	13.53	52.89	101.88	-48.99
5718.60	Peak	39.03	13.66	52.69	110.41	-57.72
5723.10	Peak	39.53	13.68	53.21	117.87	-64.66
5795.00	Peak	78.29	14.13	92.41	--	--
5795.00	Average	72.01	14.13	86.13	--	--
5853.00	Peak	38.65	14.02	52.67	115.36	-62.69
5870.10	Peak	38.71	14.02	52.74	106.57	-53.83
5876.40	Peak	39.23	14.03	53.26	104.16	-50.90
5979.60	Peak	39.37	14.15	53.53	68.20	-14.67

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

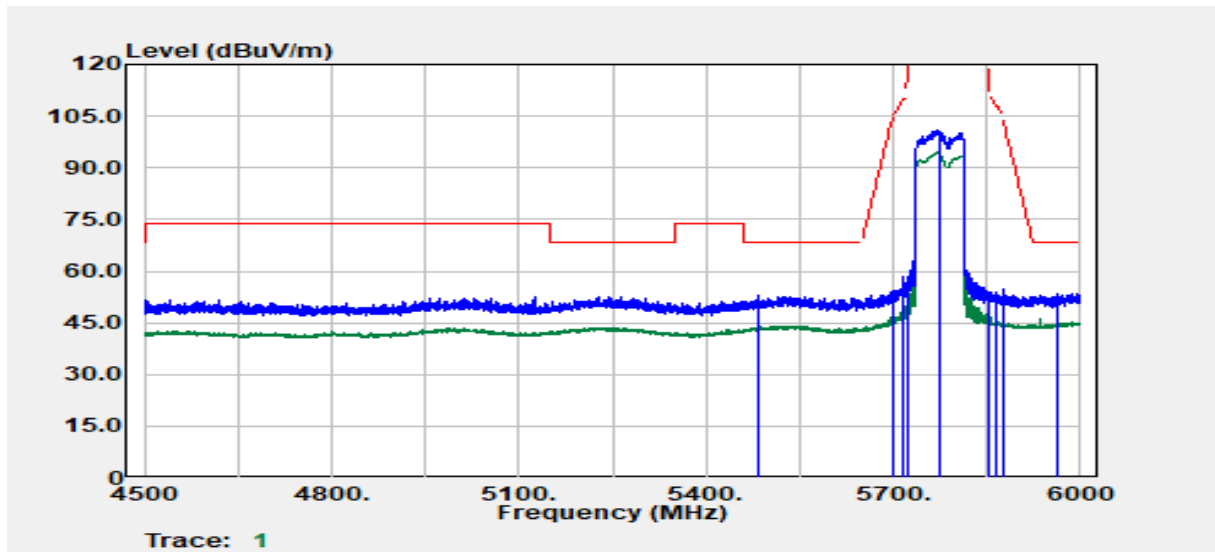

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5484.90	Peak	40.60	12.50	53.09	68.20	-15.11
5698.80	Peak	40.60	13.55	54.15	104.32	-50.16
5715.00	Peak	44.57	13.64	58.21	109.40	-51.19
5722.20	Peak	44.95	13.68	58.63	115.82	-57.19
5775.00	Peak	87.19	13.99	101.18	--	--
5775.00	Average	80.57	13.99	94.56	--	--
5852.10	Peak	40.03	14.02	54.05	117.41	-63.36
5864.40	Peak	39.92	14.02	53.95	108.17	-54.22
5878.50	Peak	40.67	14.03	54.70	102.60	-47.90
5964.00	Peak	39.33	14.16	53.48	68.20	-14.72


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 9, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

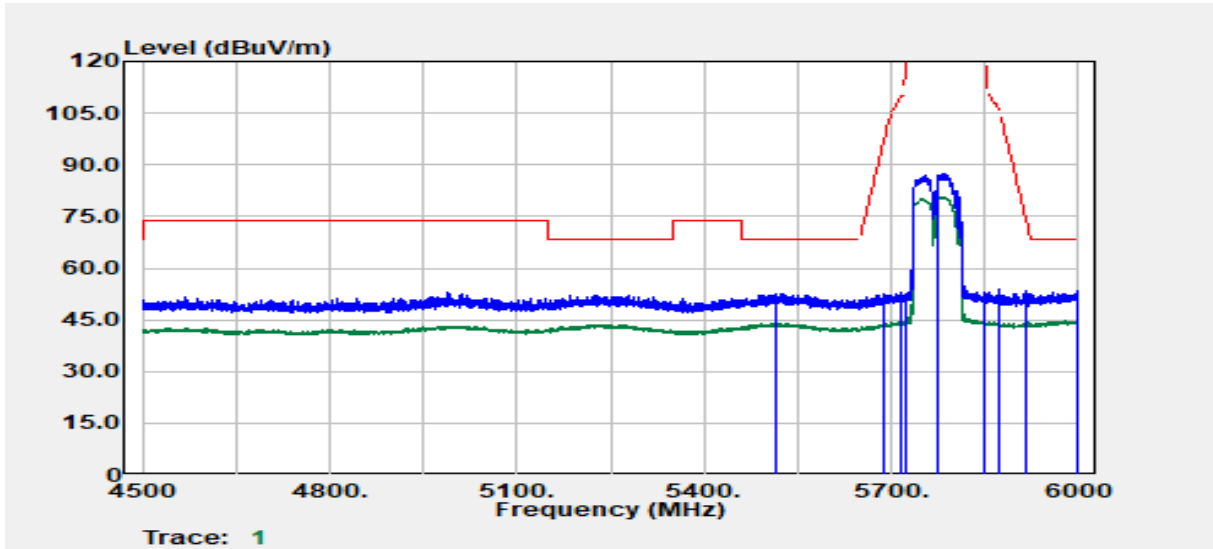

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5516.10	Peak	40.06	12.67	52.73	68.20	-15.47
5687.10	Peak	39.25	13.49	52.74	95.69	-42.95
5714.40	Peak	39.31	13.63	52.94	109.23	-56.29
5721.60	Peak	38.95	13.67	52.62	114.45	-61.82
5775.00	Peak	73.35	13.99	87.34	--	--
5775.00	Average	66.57	13.99	80.56	--	--
5850.90	Peak	37.81	14.02	51.83	120.15	-68.31
5871.90	Peak	39.89	14.02	53.92	106.07	-52.15
5916.00	Peak	39.52	14.07	53.59	74.84	-21.25
5999.40	Peak	39.14	14.15	53.29	68.20	-14.91




Test Mode	IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

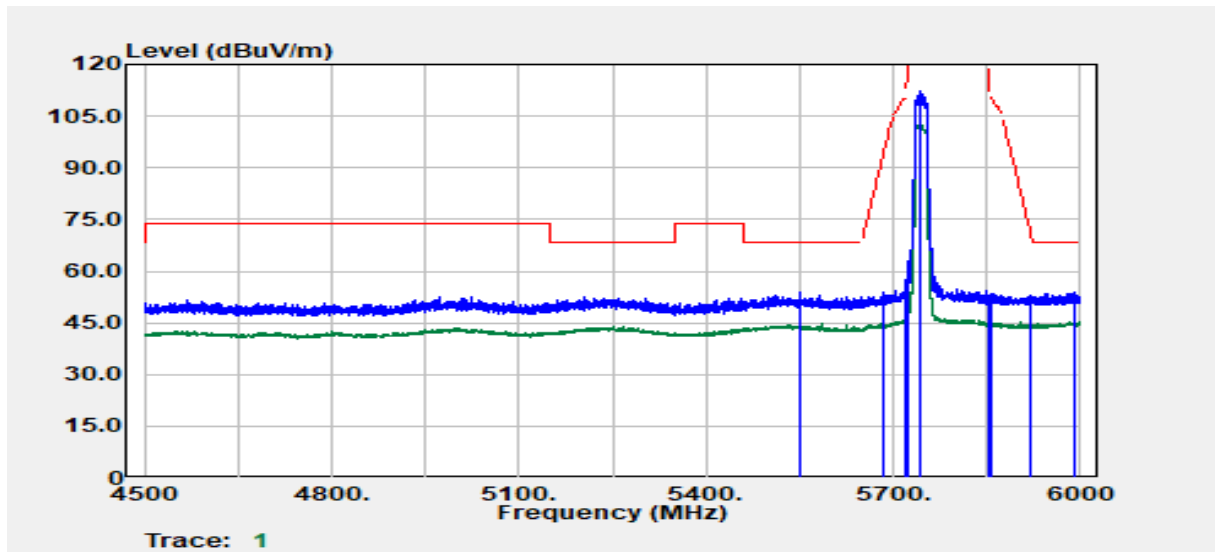


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5549.10	Peak	40.87	12.91	53.78	68.20	-14.42
5682.30	Peak	40.26	13.46	53.72	92.14	-38.42
5720.10	Peak	44.00	13.66	57.67	111.03	-53.36
5724.30	Peak	49.19	13.69	62.88	120.60	-57.73
5745.00	Peak	98.72	13.79	112.52	--	--
5745.00	Average	89.30	13.79	103.09	--	--
5853.00	Peak	39.05	14.02	53.07	115.36	-62.28
5857.50	Peak	39.61	14.02	53.63	110.10	-56.47
5918.70	Peak	38.84	14.08	52.92	72.84	-19.92
5989.50	Peak	39.73	14.15	53.88	68.20	-14.32

Test Mode	IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

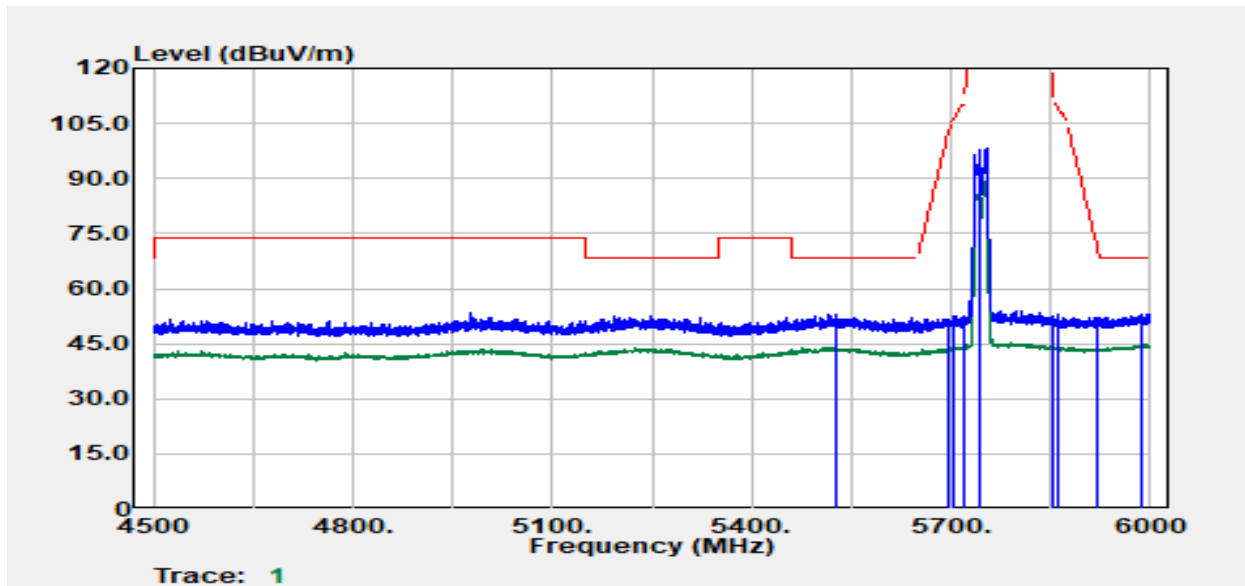


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5525.10	Peak	40.35	12.73	53.08	68.20	-15.12
5696.40	Peak	38.29	13.54	51.83	102.55	-50.71
5705.70	Peak	39.05	13.59	52.64	106.80	-54.16
5721.30	Peak	38.72	13.67	52.39	113.77	-61.38
5745.00	Peak	84.43	13.79	98.22	--	--
5745.00	Average	75.92	13.79	89.71	--	--
5853.30	Peak	38.30	14.02	52.32	114.67	-62.35
5861.70	Peak	38.82	14.02	52.84	108.92	-56.08
5920.20	Peak	38.19	14.08	52.28	71.74	-19.46
5986.50	Peak	39.04	14.15	53.20	68.20	-15.00

Test Mode	IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

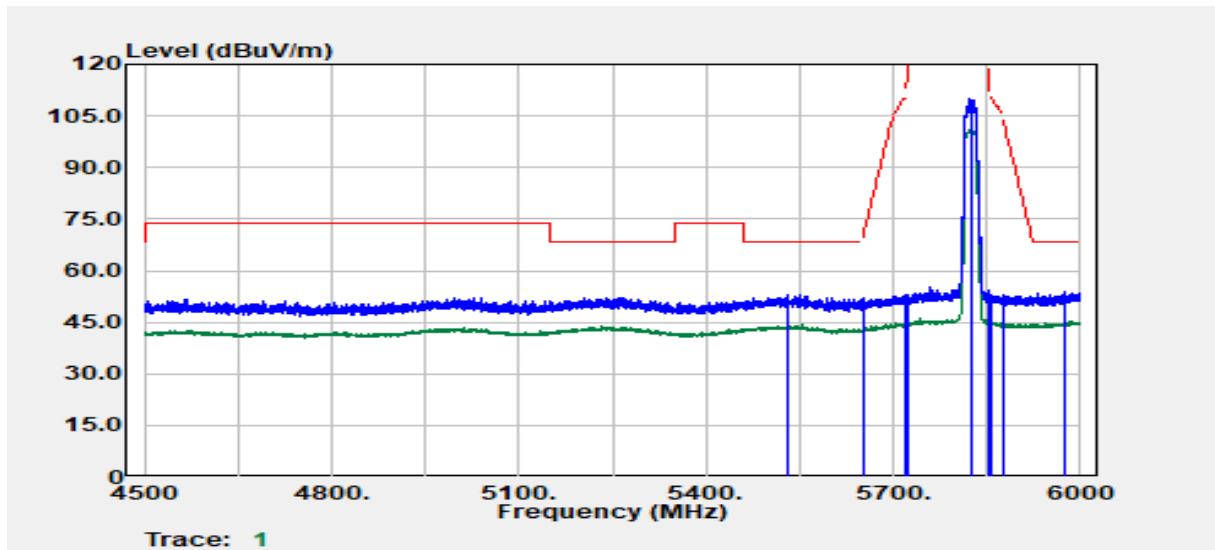


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5529.30	Peak	40.43	12.76	53.19	68.20	-15.01
5652.60	Peak	38.88	13.29	52.18	70.13	-17.95
5718.00	Peak	39.22	13.65	52.88	110.24	-57.36
5724.60	Peak	39.07	13.69	52.76	121.29	-68.53
5825.00	Peak	95.89	14.09	109.98	--	--
5825.00	Average	87.07	14.09	101.16	--	--
5852.10	Peak	40.25	14.02	54.27	117.41	-63.14
5856.90	Peak	39.06	14.02	53.08	110.27	-57.18
5876.70	Peak	39.01	14.03	53.04	103.94	-50.90
5976.30	Peak	39.71	14.15	53.87	68.20	-14.33

Test Mode	IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	23.1(°C)/ 60%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

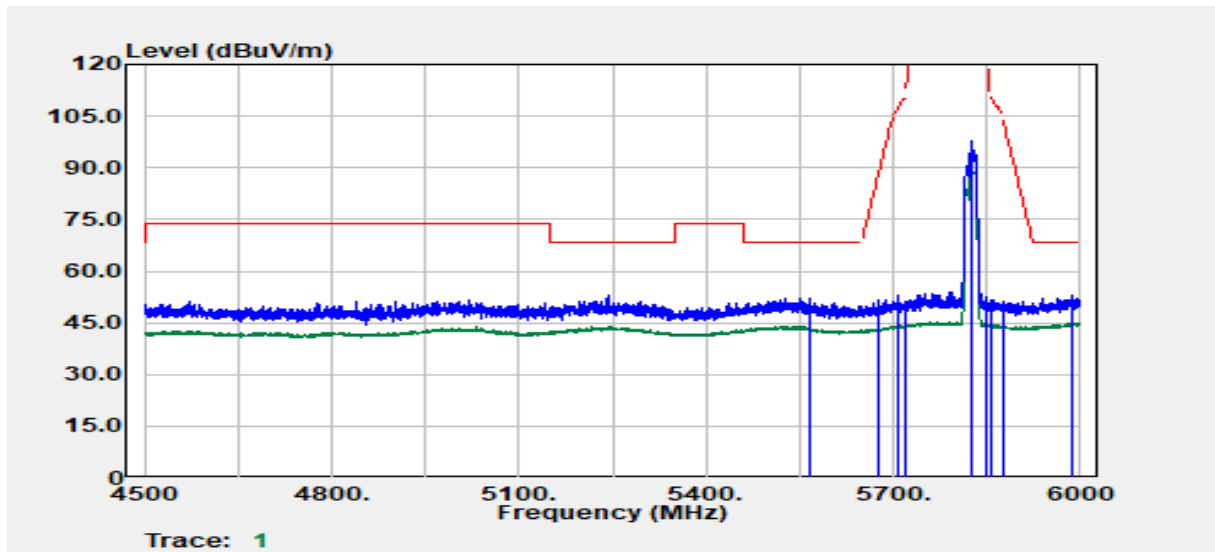


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
5567.70	Peak	39.22	12.88	52.11	68.20	-16.09
5675.70	Peak	38.29	13.42	51.71	87.26	-35.55
5708.40	Peak	39.27	13.60	52.88	107.55	-54.68
5721.00	Peak	37.68	13.67	51.35	113.08	-61.73
5825.00	Peak	83.51	14.09	97.60	--	--
5825.00	Average	75.38	14.09	89.47	--	--
5850.30	Peak	38.41	14.02	52.43	121.52	-69.08
5856.60	Peak	37.64	14.02	51.66	110.35	-58.69
5876.10	Peak	37.04	14.03	51.06	104.38	-53.32
5988.30	Peak	38.92	14.15	53.07	68.20	-15.13

Test Mode	IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

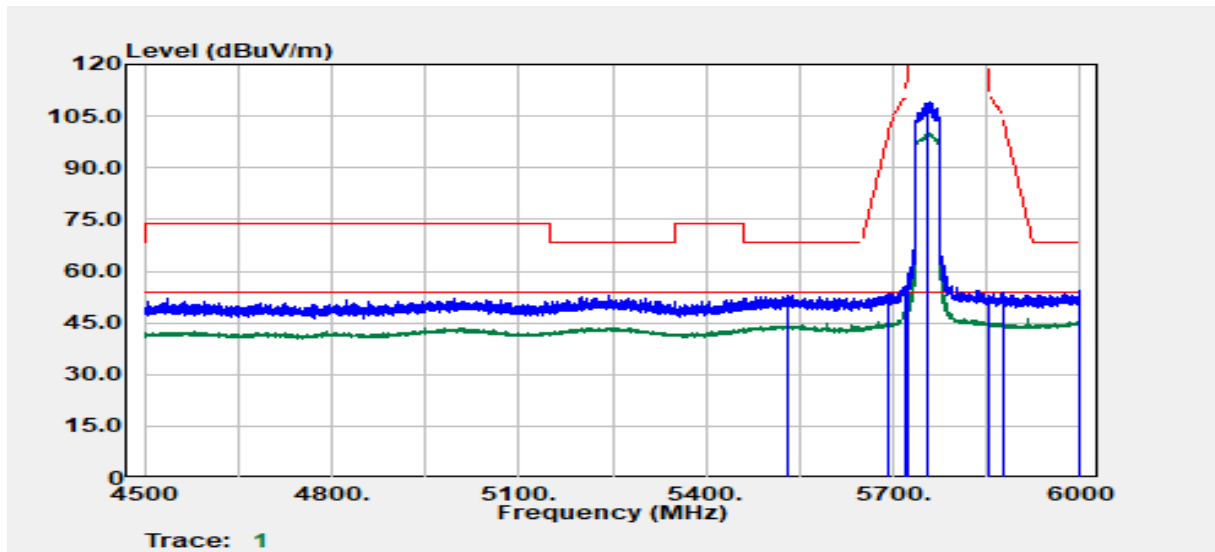


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5529.17	Peak	40.31	12.76	53.07	68.20	-15.13
5690.45	Peak	40.05	13.51	53.55	98.16	-44.60
5718.95	Peak	42.21	13.66	55.87	110.51	-54.64
5724.70	Peak	45.67	13.69	59.35	121.53	-62.17
5755.00	Peak	95.39	13.85	109.24	--	--
5755.00	Average	86.16	13.85	100.01	--	--
5854.23	Peak	38.87	14.02	52.89	112.56	-59.67
5874.98	Peak	39.68	14.03	53.70	105.21	-51.50
5874.98	Peak	39.68	14.03	53.70	105.21	-51.50
5997.25	Peak	40.26	14.15	54.41	68.20	-13.79

Test Mode	IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

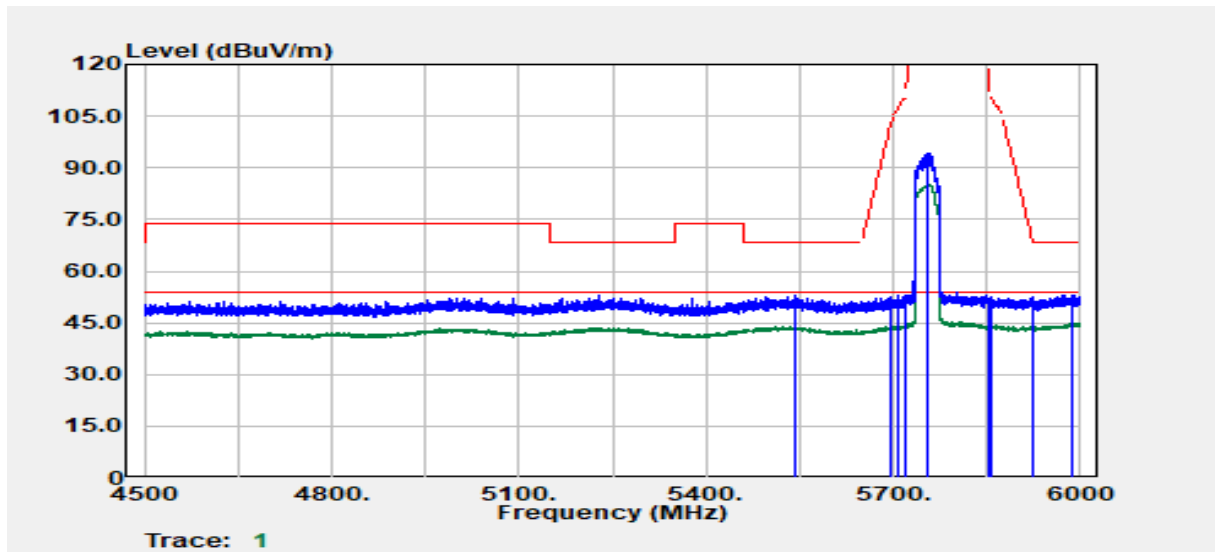


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5540.92	Peak	40.07	12.85	52.91	68.20	-15.29
5697.20	Peak	38.94	13.54	52.48	103.14	-50.65
5707.20	Peak	39.44	13.60	53.04	107.22	-54.18
5721.45	Peak	39.15	13.67	52.82	114.12	-61.30
5755.00	Peak	80.42	13.85	94.27	--	--
5755.00	Average	71.55	13.85	85.40	--	--
5852.48	Peak	38.21	14.02	52.23	116.55	-64.33
5858.73	Peak	38.35	14.02	52.37	109.76	-57.39
5924.49	Peak	38.22	14.09	52.31	68.58	-16.26
5988.50	Peak	38.92	14.15	53.07	68.20	-15.13

Test Mode	IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

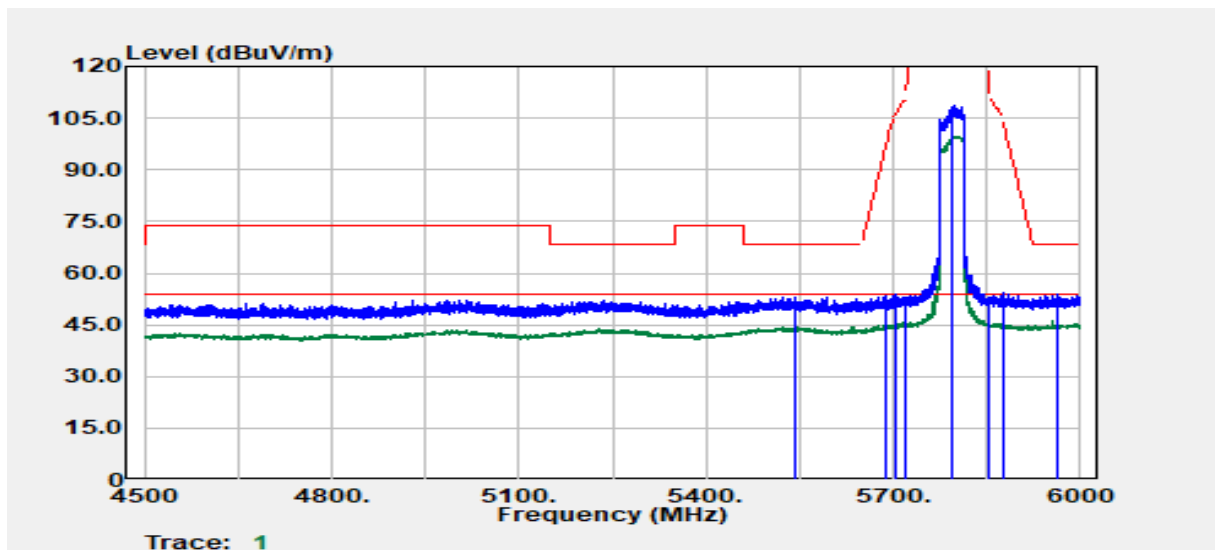

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5541.67	Peak	40.33	12.85	53.18	68.20	-15.02
5689.20	Peak	40.00	13.50	53.50	97.23	-43.73
5705.70	Peak	40.52	13.59	54.11	106.80	-52.69
5720.45	Peak	39.47	13.67	53.13	111.84	-58.70
5795.00	Peak	94.67	14.13	108.79	--	--
5795.00	Average	85.59	14.13	99.71	--	--
5854.98	Peak	38.81	14.02	52.83	110.85	-58.02
5874.98	Peak	40.22	14.03	54.25	105.21	-50.96
5874.98	Peak	40.22	14.03	54.25	105.21	-50.96
5963.49	Peak	39.69	14.16	53.84	68.20	-14.36

Test Mode	IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

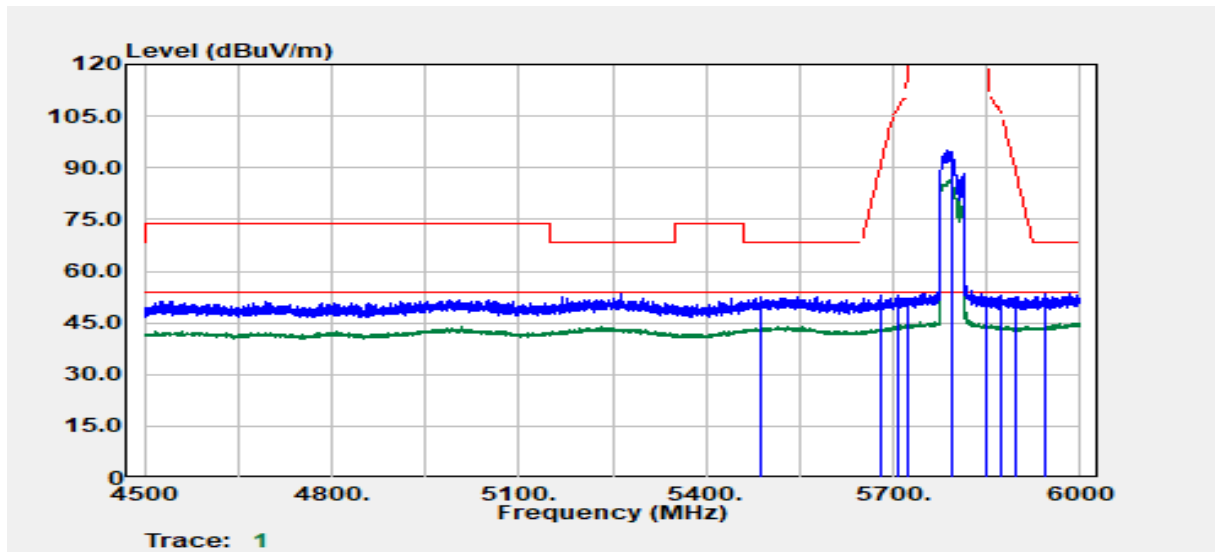

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5488.17	Peak	39.97	12.51	52.48	68.20	-15.72
5681.45	Peak	39.42	13.46	52.87	91.51	-38.63
5709.20	Peak	39.43	13.61	53.03	107.78	-54.75
5723.95	Peak	38.58	13.68	52.26	119.82	-67.55
5795.00	Peak	81.14	14.13	95.27	--	--
5795.00	Average	72.43	14.13	86.55	--	--
5850.73	Peak	38.22	14.02	52.24	120.55	-68.30
5872.98	Peak	38.89	14.02	52.91	105.77	-52.85
5897.23	Peak	38.33	14.03	52.36	88.71	-36.35
5942.74	Peak	39.28	14.14	53.42	68.20	-14.78