



Test Mode	IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

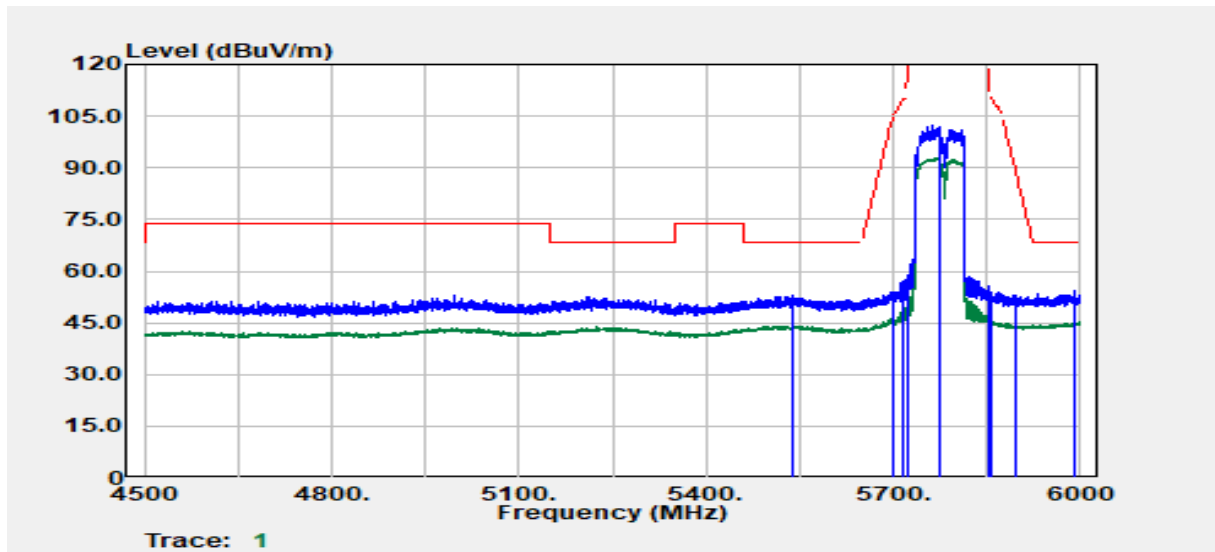

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5539.50	Peak	40.17	12.84	53.01	68.20	-15.19
5698.50	Peak	40.27	13.55	53.82	104.09	-50.28
5714.10	Peak	43.38	13.63	57.02	109.15	-52.13
5722.80	Peak	44.95	13.68	58.62	117.19	-58.56
5775.00	Peak	88.44	13.99	102.43	--	--
5775.00	Average	78.76	13.99	92.75	--	--
5851.80	Peak	41.76	14.02	55.78	118.09	-62.32
5855.70	Peak	40.08	14.02	54.11	110.60	-56.50
5895.60	Peak	39.01	14.03	53.04	89.92	-36.88
5990.40	Peak	40.18	14.15	54.33	68.20	-13.87


Test Mode	IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Band Edge	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

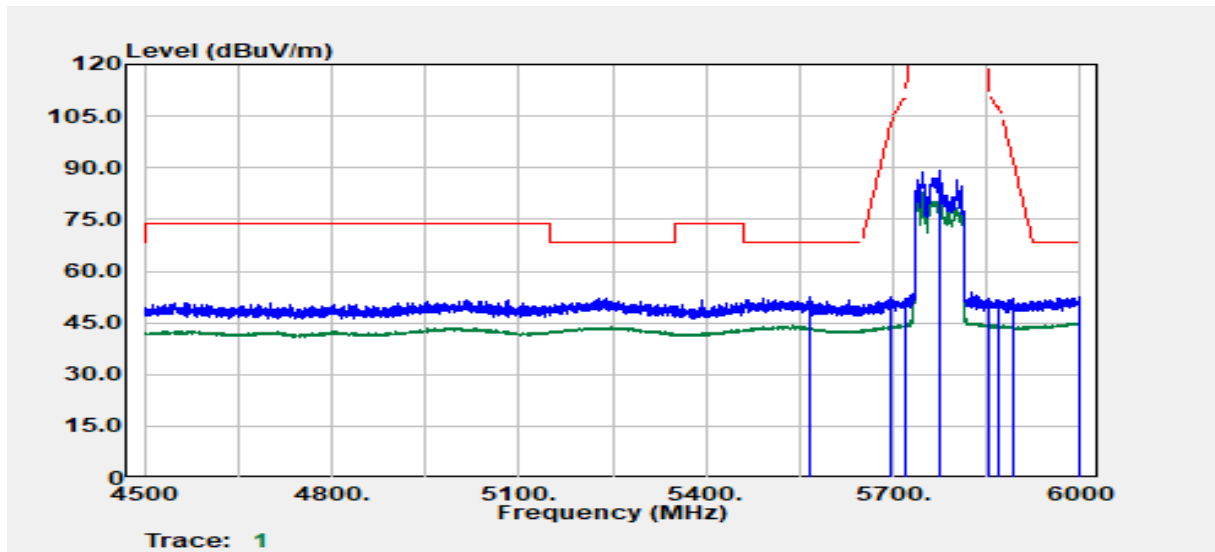

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
5566.80	Peak	39.69	12.89	52.58	68.20	-15.62
5697.00	Peak	39.19	13.54	52.73	102.99	-50.26
5719.20	Peak	38.53	13.66	52.19	110.58	-58.39
5720.70	Peak	38.48	13.67	52.15	112.40	-60.25
5775.00	Peak	75.56	13.99	89.55	--	--
5775.00	Average	68.92	13.99	82.91	--	--
5853.90	Peak	38.04	14.02	52.06	113.31	-61.24
5869.20	Peak	37.71	14.02	51.73	106.82	-55.09
5891.10	Peak	37.86	14.03	51.89	93.25	-41.36
6000.00	Peak	38.61	14.15	52.76	68.20	-15.44

Below 1G Test Data: Beamforming


Test Mode	IEEE 802.11ac 160 / 5250 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

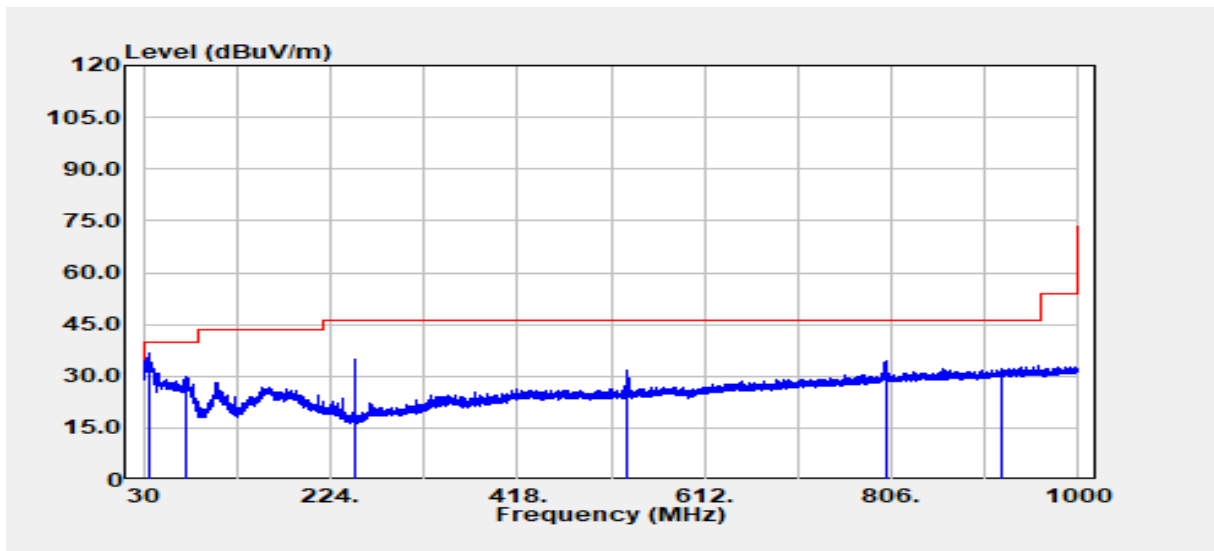

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
35.34	Peak	42.77	-6.28	36.48	40.00	-3.52
73.89	Peak	45.37	-15.62	29.76	40.00	-10.24
249.95	Peak	45.57	-10.79	34.78	46.00	-11.22
532.58	Peak	34.73	-3.03	31.70	46.00	-14.30
799.82	Peak	32.83	1.42	34.25	46.00	-11.75
919.25	Peak	29.22	3.15	32.37	46.00	-13.63

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	IEEE 802.11ac 160 / 5250 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

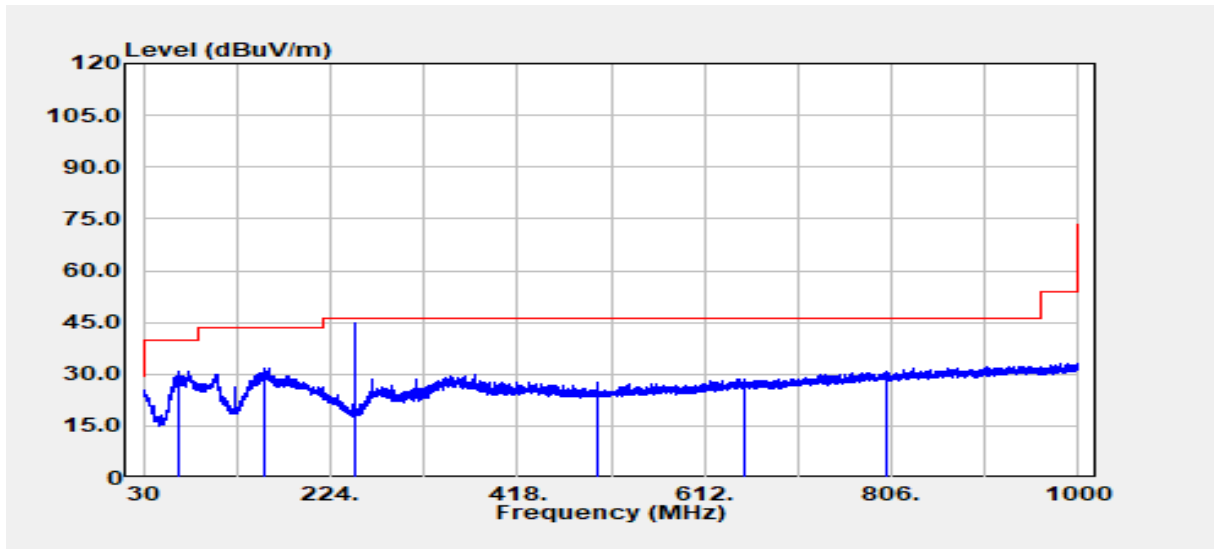

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
67.22	Peak	46.40	-15.60	30.80	40.00	-9.20
155.25	Peak	42.30	-10.43	31.88	43.50	-11.62
249.95	Peak	55.46	-10.79	44.67	46.00	-1.33
499.97	Peak	31.16	-3.57	27.59	46.00	-18.41
654.32	Peak	29.39	-0.66	28.73	46.00	-17.27
799.82	Peak	29.24	1.42	30.66	46.00	-15.34

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

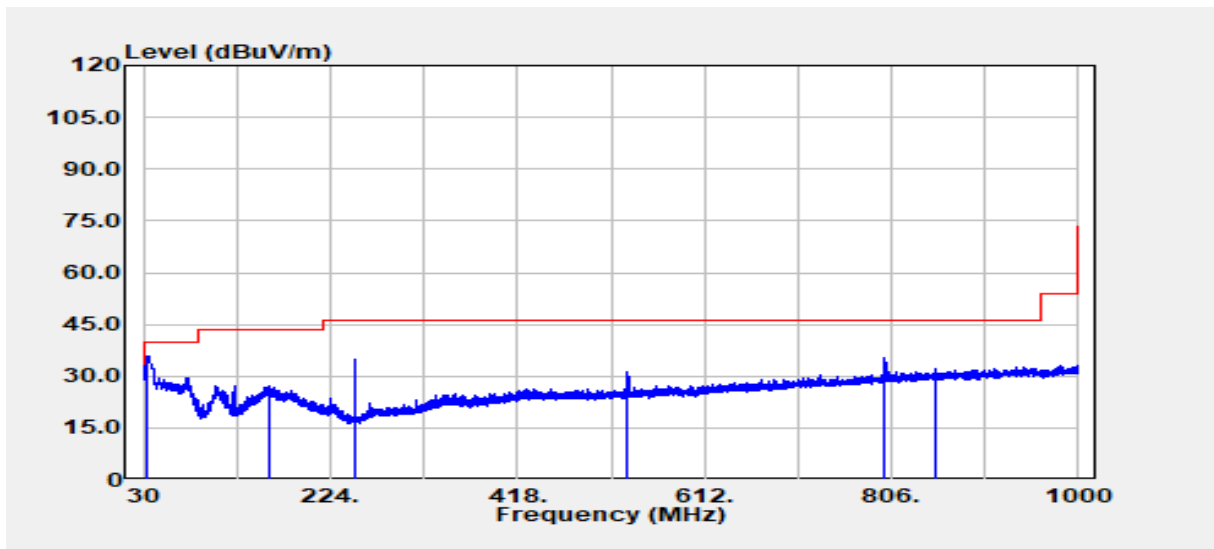

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
33.03	Peak	40.35	-4.49	35.86	40.00	-4.14
160.95	Peak	37.77	-10.63	27.14	43.50	-16.36
249.95	Peak	45.52	-10.79	34.73	46.00	-11.27
532.10	Peak	34.18	-3.03	31.15	46.00	-14.85
799.09	Peak	33.79	1.42	35.21	46.00	-10.79
851.95	Peak	29.85	2.29	32.14	46.00	-13.86

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

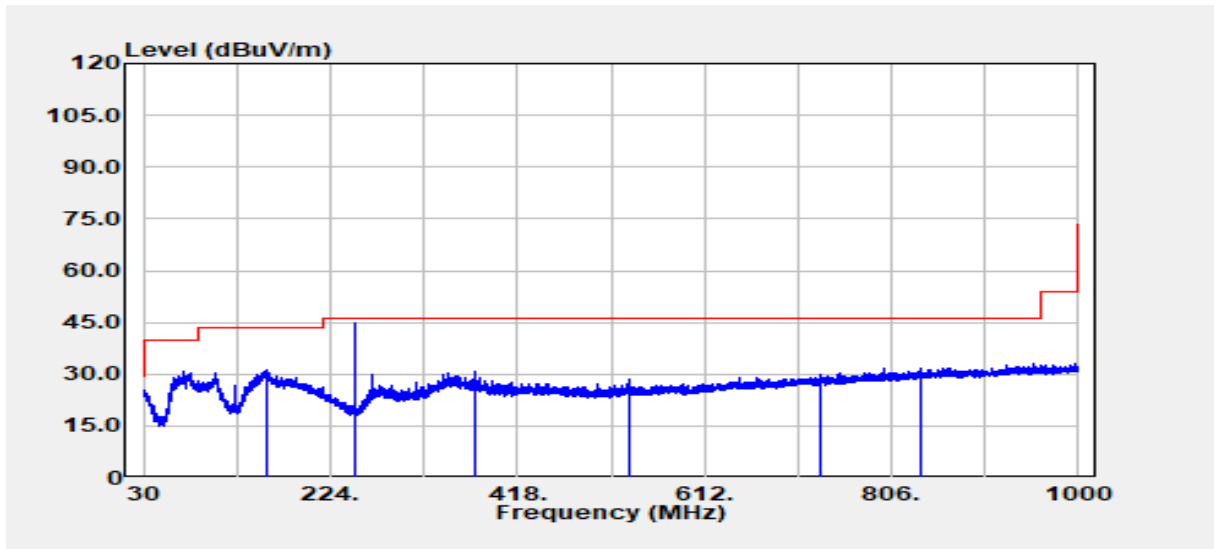

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
158.40	Peak	41.77	-10.59	31.18	43.50	-12.32
249.95	Peak	55.42	-10.79	44.63	46.00	-1.37
374.96	Peak	37.41	-6.74	30.67	46.00	-15.33
532.95	Peak	31.67	-3.03	28.64	46.00	-17.36
733.13	Peak	29.26	0.58	29.84	46.00	-16.16
835.71	Peak	29.69	2.19	31.88	46.00	-14.12

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.


Test Mode	IEEE 802.11n H20 / 5745 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak		

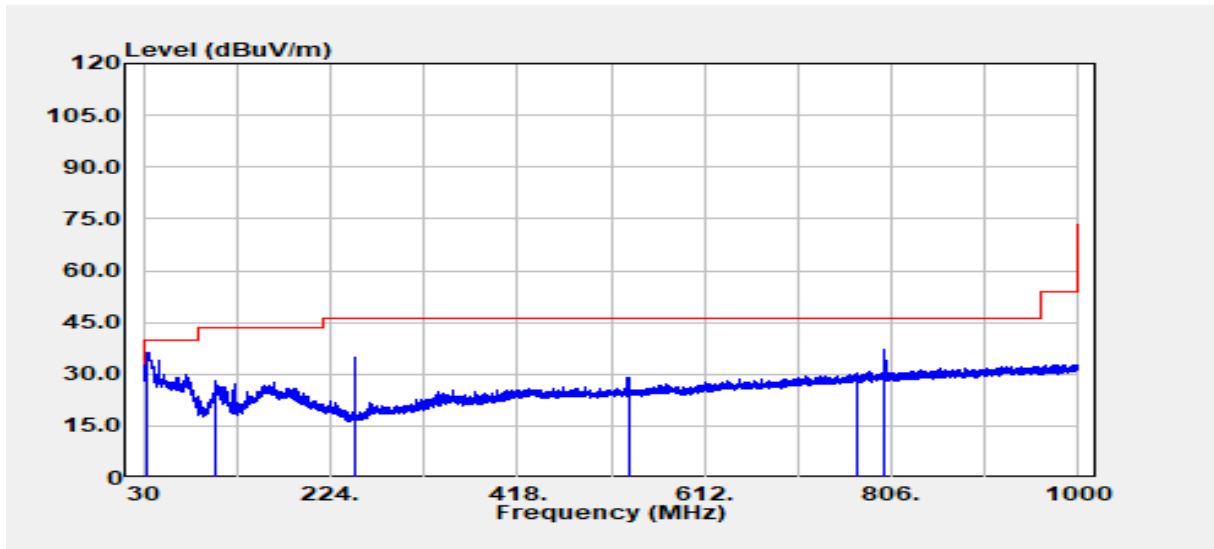

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
34.73	Peak	42.00	-5.72	36.29	40.00	-3.71
104.93	Peak	39.69	-11.42	28.27	43.50	-15.23
249.95	Peak	45.56	-10.79	34.77	46.00	-11.23
532.95	Peak	31.86	-3.03	28.84	46.00	-17.16
770.72	Peak	29.08	1.08	30.16	46.00	-15.84
799.45	Peak	35.72	1.42	37.14	46.00	-8.86

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n H20 / 5745 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak		

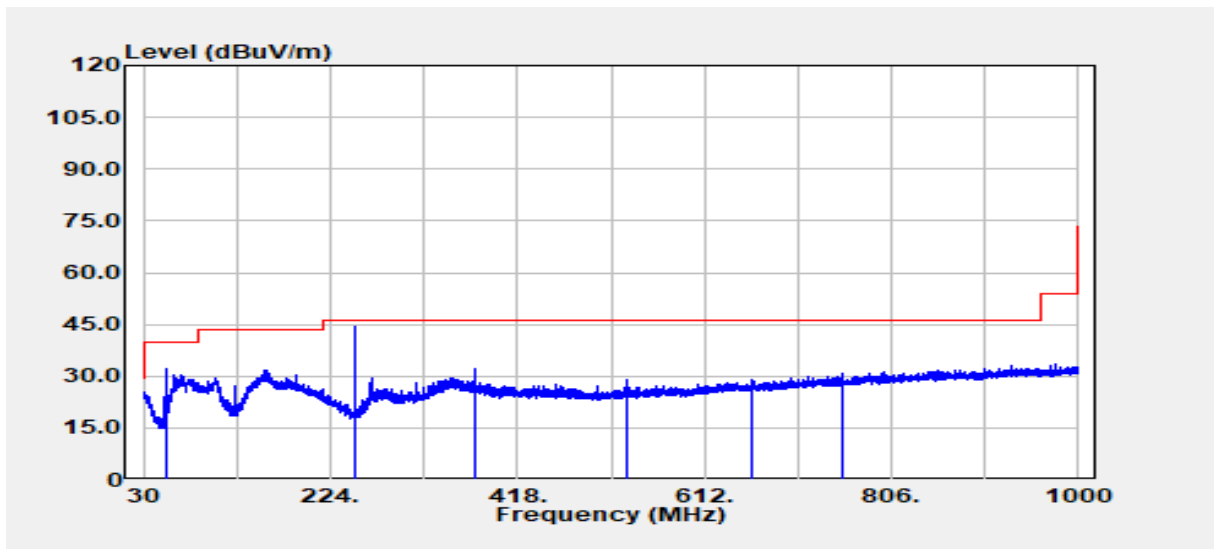

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
52.80	Peak	48.34	-16.16	32.18	40.00	-7.82
249.95	Peak	55.37	-10.79	44.58	46.00	-1.42
374.96	Peak	38.71	-6.74	31.97	46.00	-14.03
531.01	Peak	32.03	-3.04	28.99	46.00	-17.01
660.38	Peak	29.79	-0.81	28.97	46.00	-17.03
753.98	Peak	30.05	0.70	30.74	46.00	-15.26


Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Above 1G Test Data: Non-Beamforming

Test Data for UNII-1

(1) Chain 0:

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

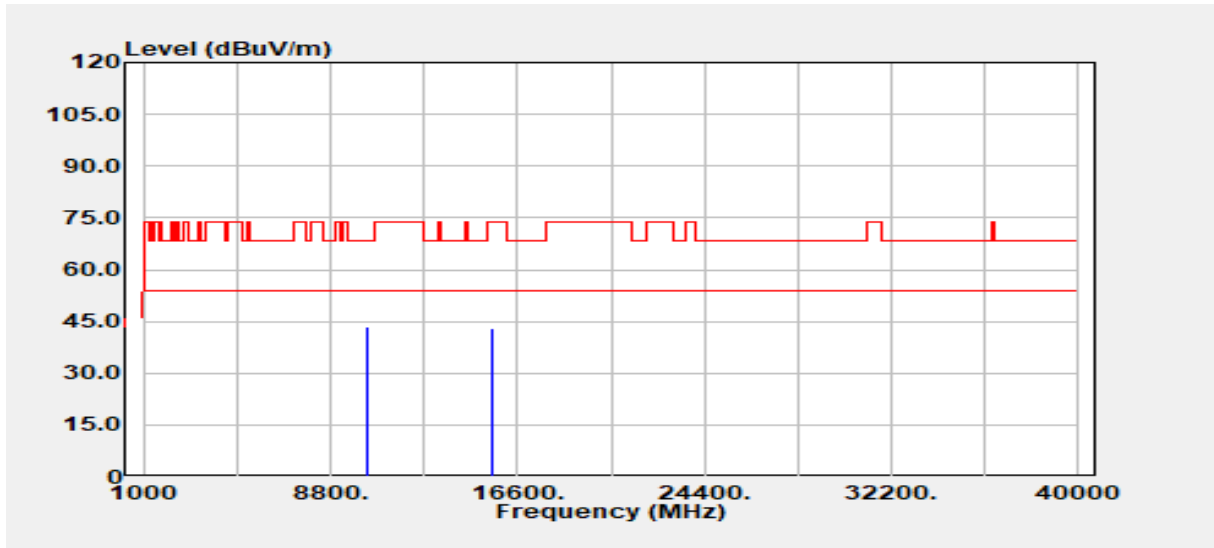


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	32.40	11.26	43.67	68.20	-24.53
15540.00	Peak	30.57	12.38	42.94	74.00	-31.06
15540.00	Average	26.70	12.38	39.08	54.00	-14.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

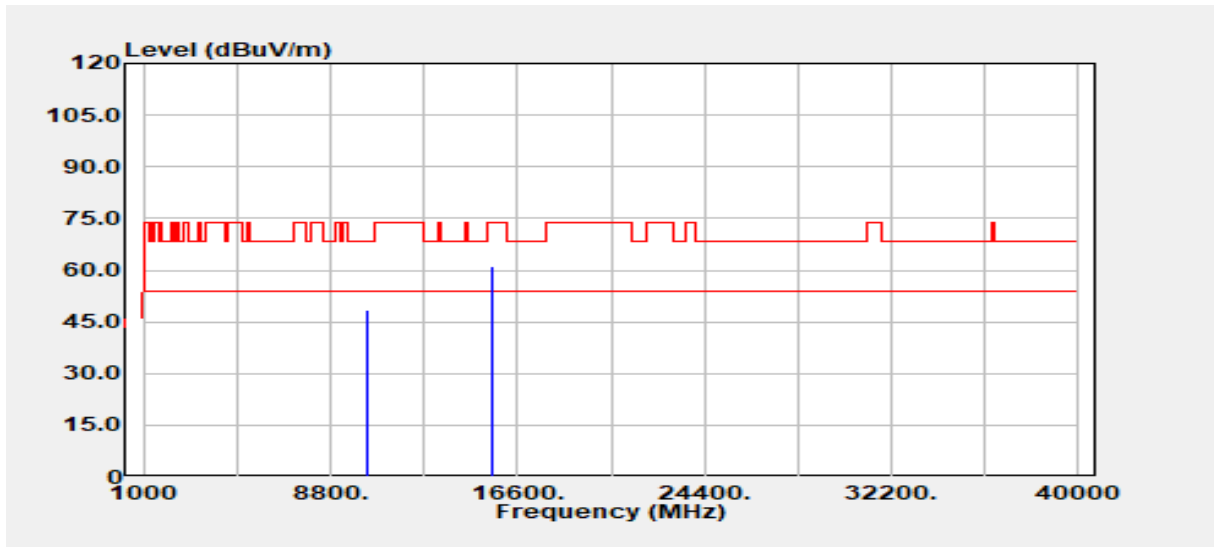


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10360.00	Peak	37.35	11.26	48.61	68.20	-19.59
15540.00	Peak	48.83	12.38	61.21	74.00	-12.79
15540.00	Average	39.34	12.38	51.72	54.00	-2.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

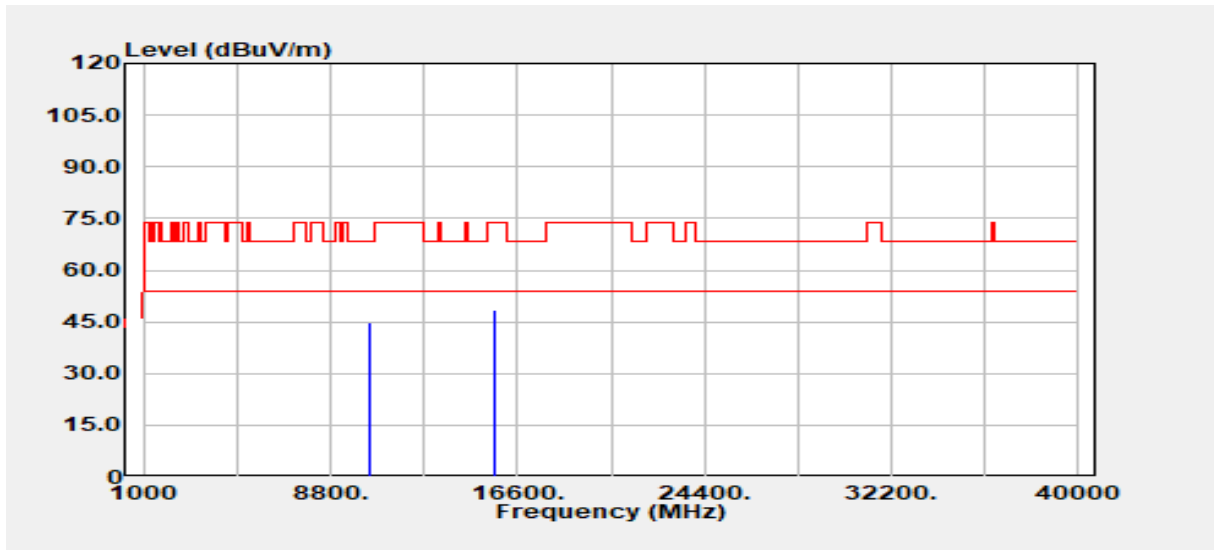


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	33.74	11.25	44.99	68.20	-23.21
15660.00	Peak	35.00	13.53	48.53	74.00	-25.47
15660.00	Average	34.35	13.53	47.87	54.00	-6.13
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

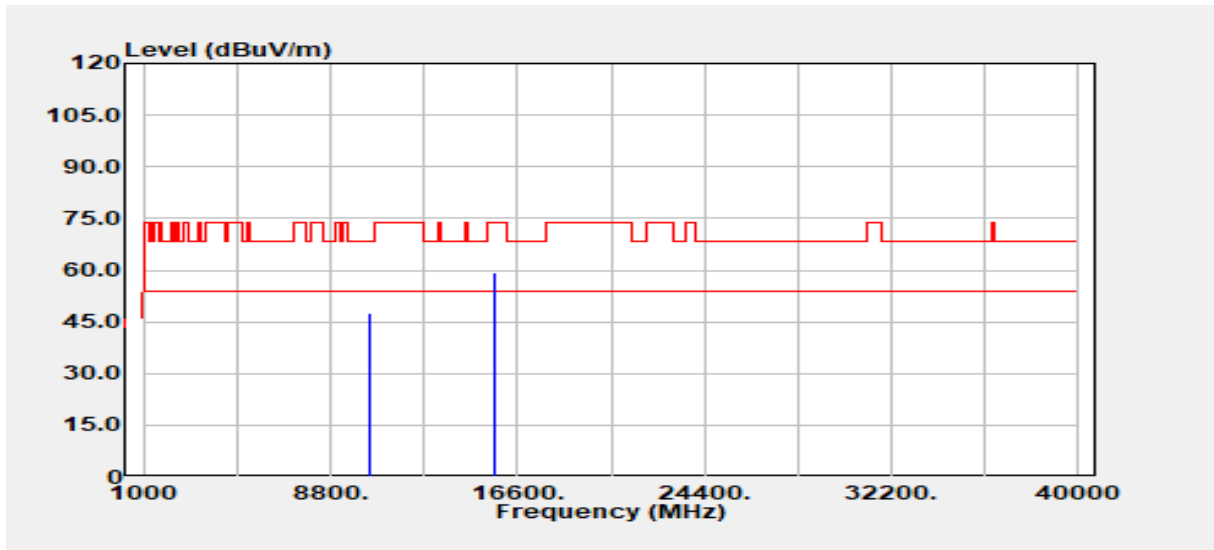


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	36.13	11.25	47.38	68.20	-20.82
15660.00	Peak	45.72	13.53	59.24	74.00	-14.76
15660.00	Average	39.82	13.53	53.35	54.00	-0.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

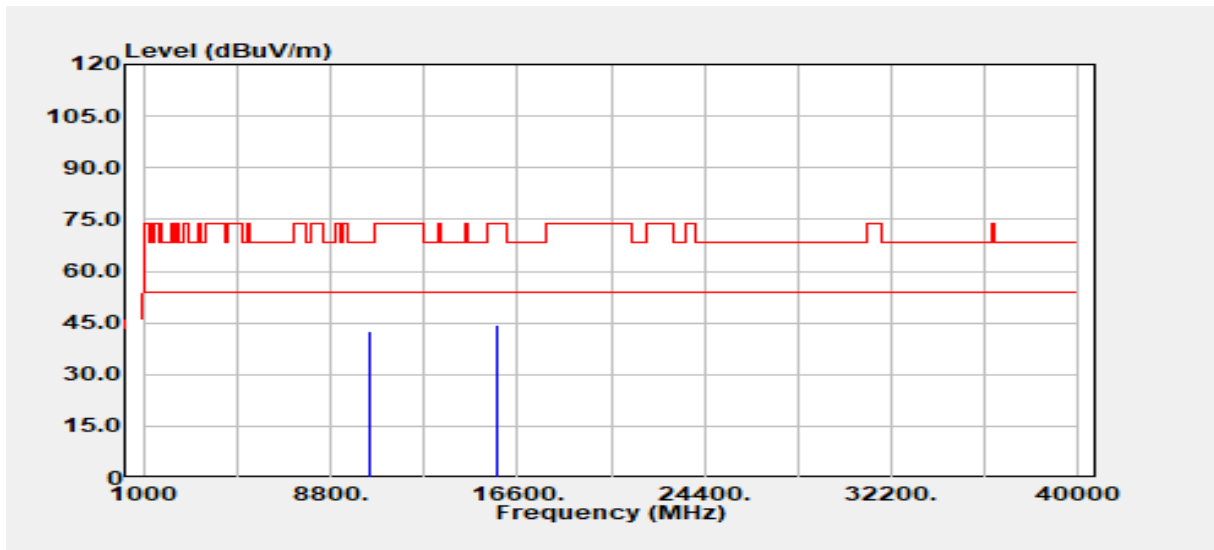


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	31.21	11.35	42.56	68.20	-25.64
15720.00	Peak	30.28	14.11	44.38	74.00	-29.62
15720.00	Average	29.29	14.11	43.40	54.00	-10.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

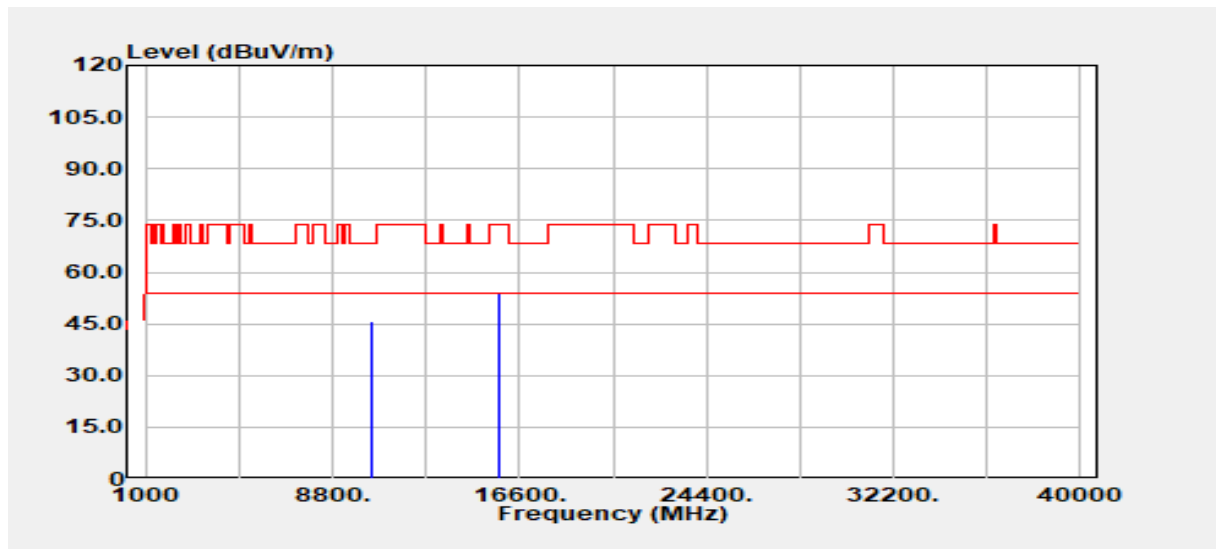

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10480.00	Peak	34.36	11.35	45.71	68.20	-22.49
15720.00	Peak	39.89	14.11	53.99	74.00	-20.01
15720.00	Average	39.20	14.11	53.30	54.00	-0.70
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-1

(2) Chain 1:

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

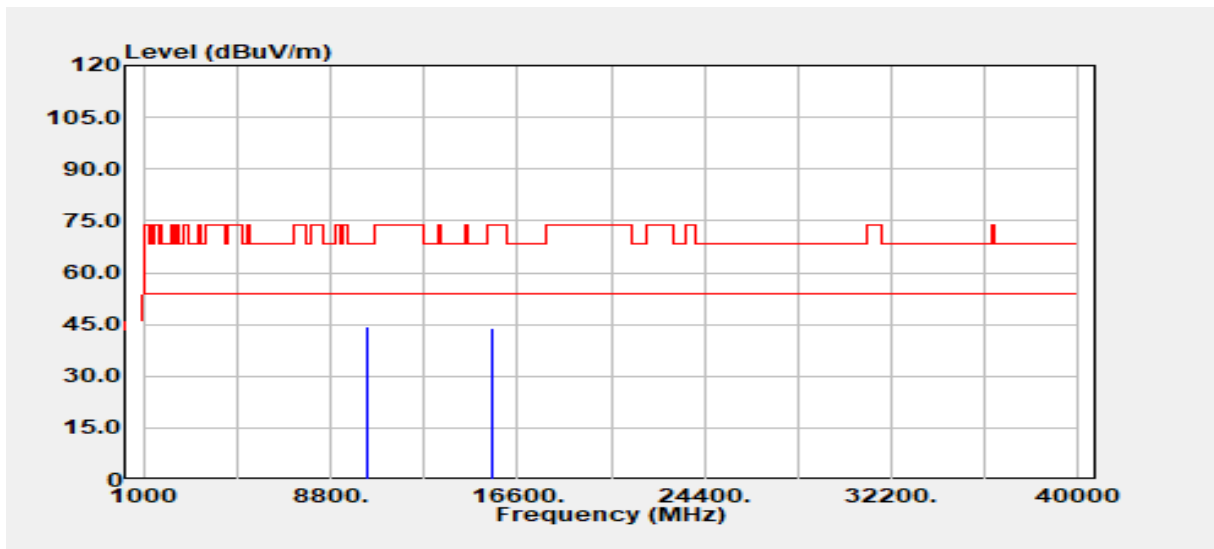


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	32.94	11.26	44.20	68.20	-24.00
15540.00	Peak	31.62	12.38	44.00	74.00	-30.00
15540.00	Average	24.55	12.38	36.93	54.00	-17.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

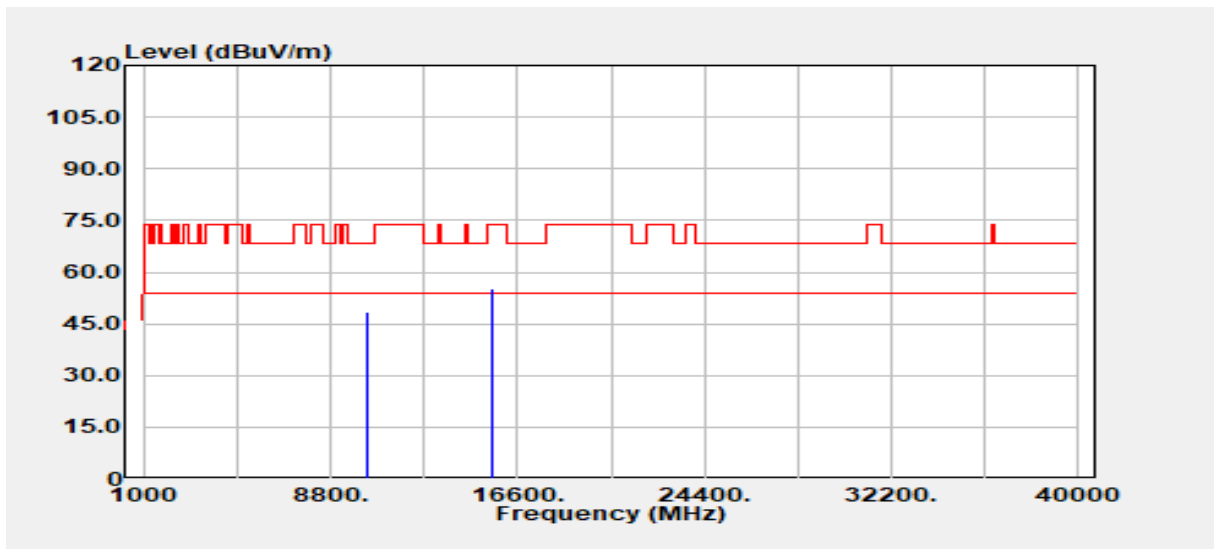


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	37.38	11.26	48.64	68.20	-19.56
15540.00	Peak	42.64	12.38	55.02	74.00	-18.98
15540.00	Average	34.18	12.38	46.56	54.00	-7.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

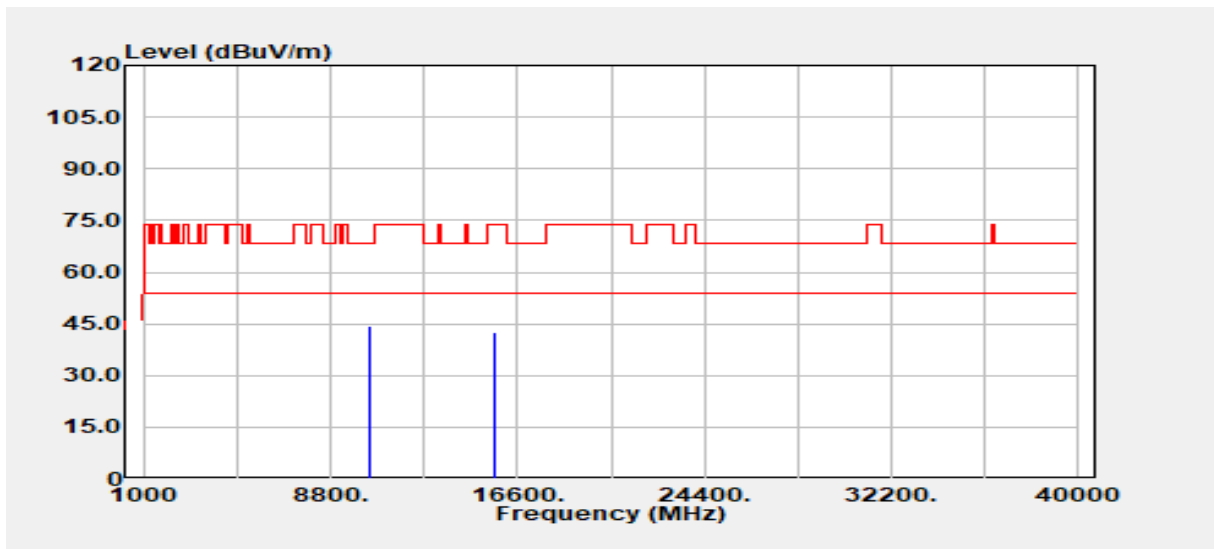


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	33.29	11.25	44.54	68.20	-23.66
15660.00	Peak	29.14	13.53	42.67	74.00	-31.33
15660.00	Average	26.65	13.53	40.18	54.00	-13.82
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

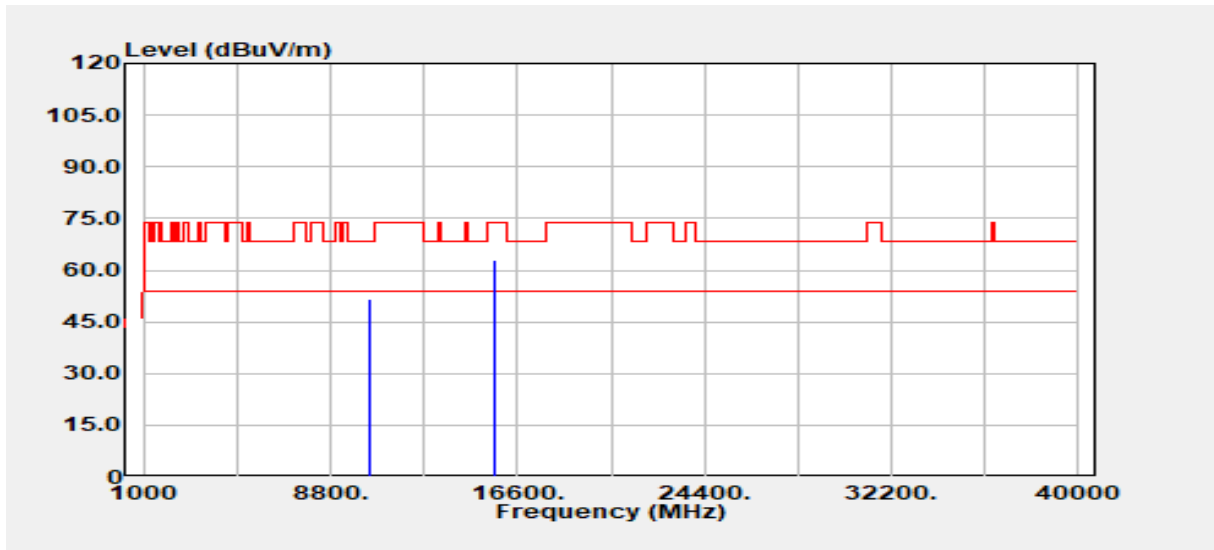


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	40.59	11.25	51.84	68.20	-16.36
15660.00	Peak	49.47	13.53	63.00	74.00	-11.00
15660.00	Average	39.63	13.53	53.16	54.00	-0.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

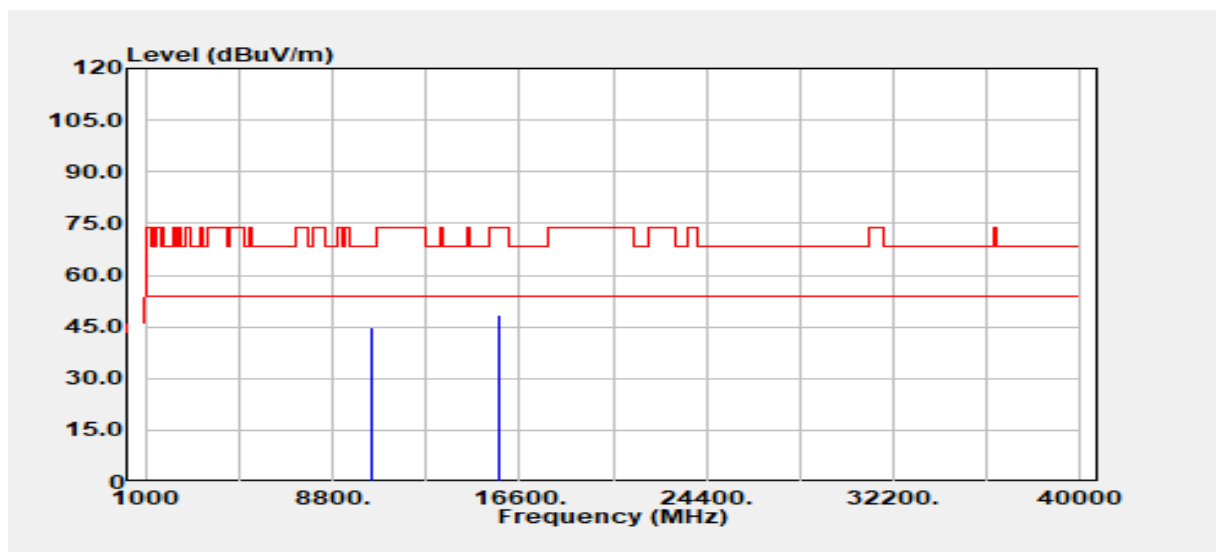


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	33.28	11.35	44.63	68.20	-23.57
15720.00	Peak	34.34	14.11	48.44	74.00	-25.56
15720.00	Average	32.28	14.11	46.38	54.00	-7.62
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

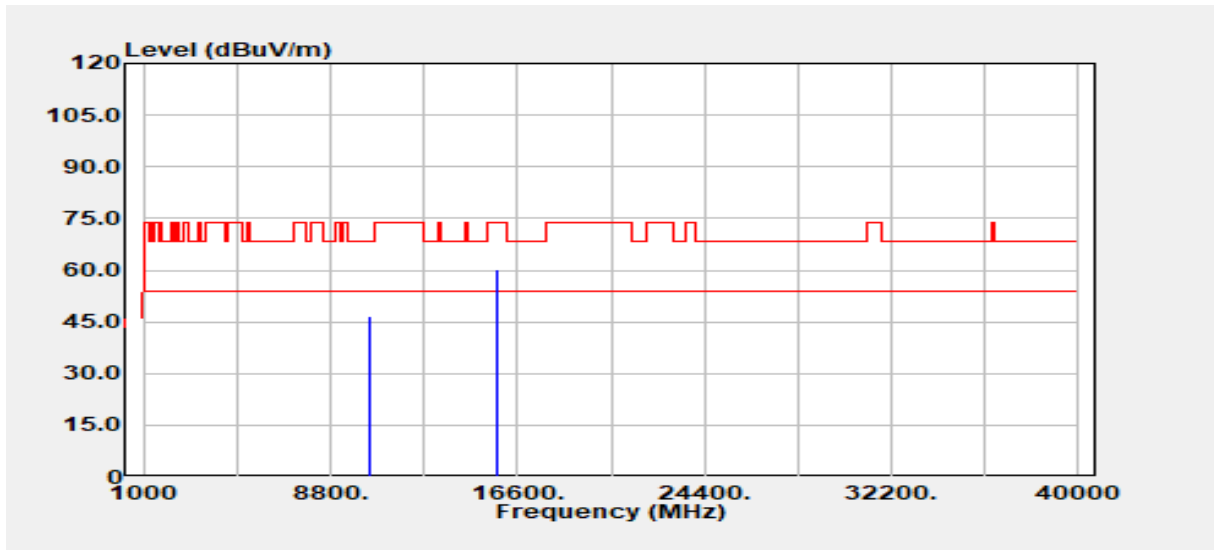

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	35.18	11.35	46.54	68.20	-21.66
15720.00	Peak	46.26	14.11	60.36	74.00	-13.64
15720.00	Average	39.43	14.11	53.54	54.00	-0.46
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-1

(3) Chain 2:

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

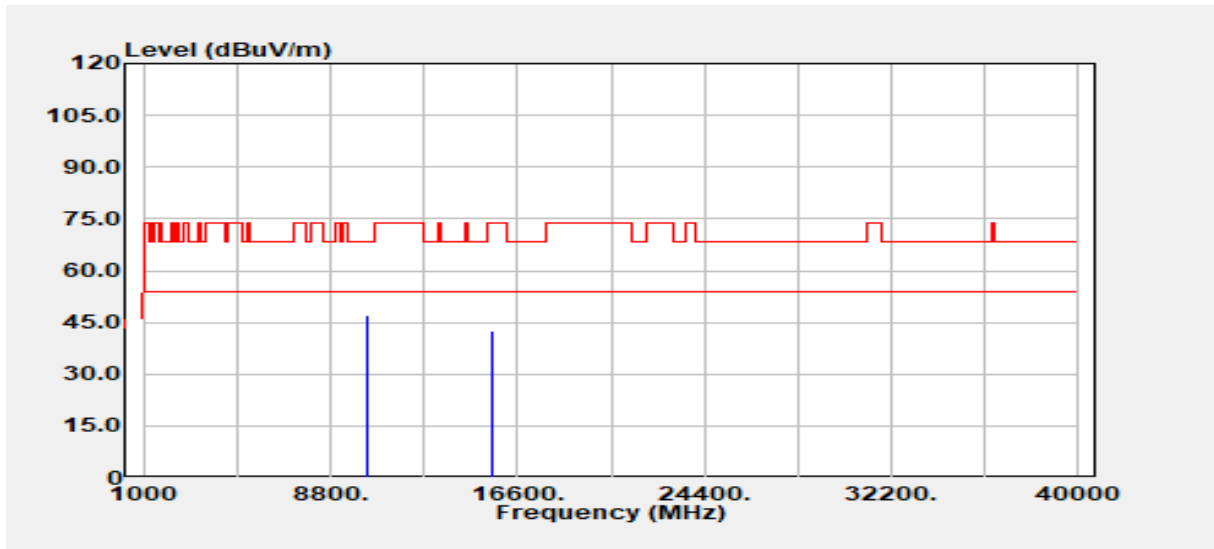


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	35.67	11.26	46.94	68.20	-21.26
15540.00	Peak	30.20	12.38	42.58	74.00	-31.42
15540.00	Average	26.19	12.38	38.57	54.00	-15.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5180 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

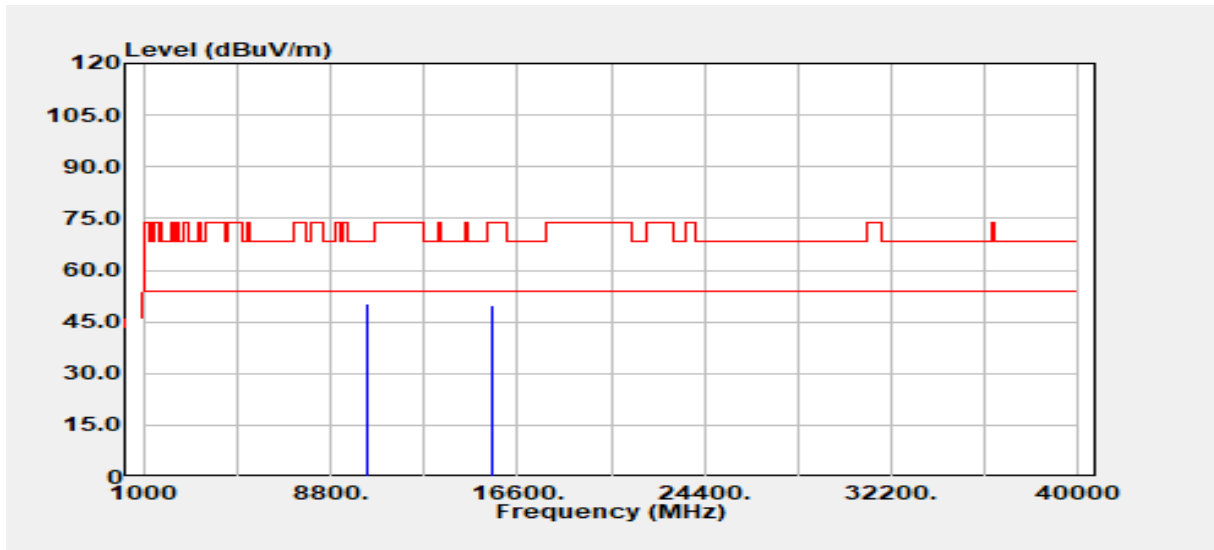


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	39.09	11.26	50.35	68.20	-17.85
15540.00	Peak	37.38	12.38	49.76	74.00	-24.24
15540.00	Average	35.95	12.38	48.32	54.00	-5.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

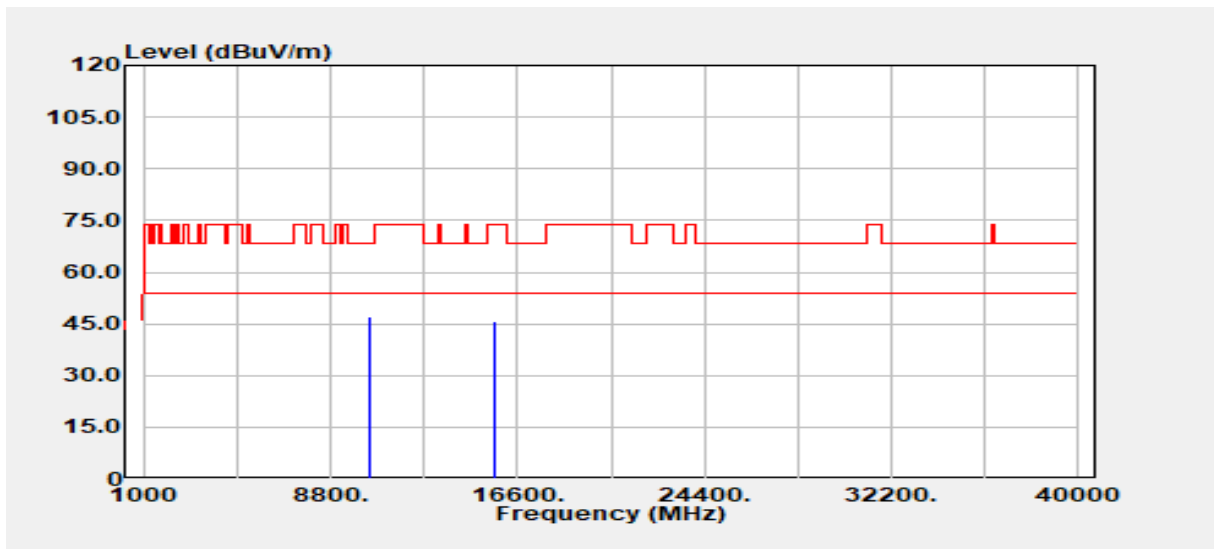


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	35.71	11.25	46.96	68.20	-21.24
15660.00	Peak	31.21	13.53	44.74	74.00	-29.26
15660.00	Average	32.26	13.53	45.78	54.00	-8.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

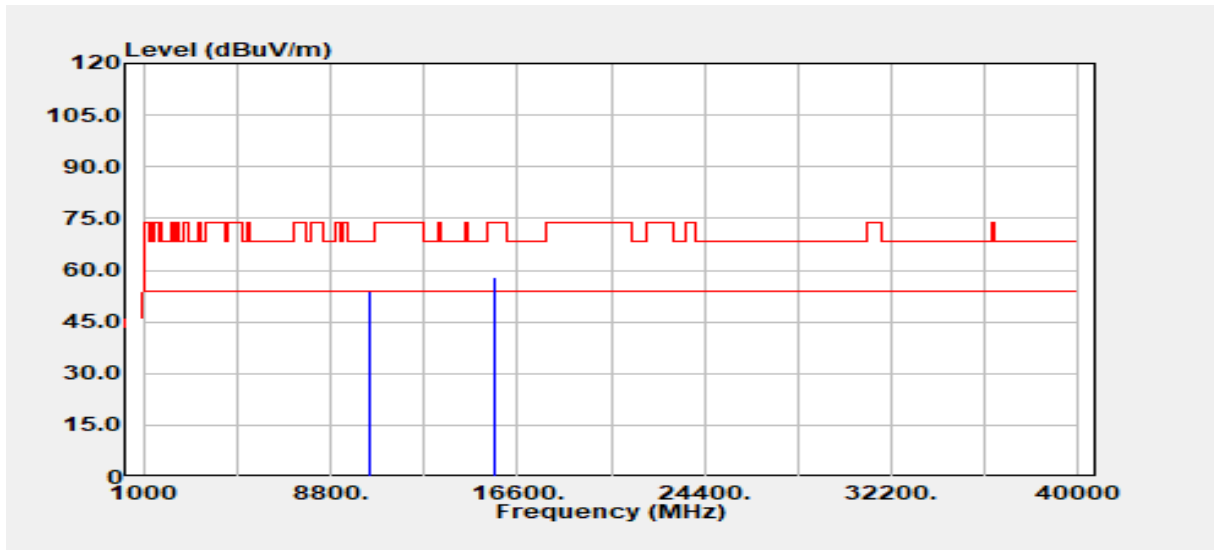


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	42.66	11.25	53.91	68.20	-14.29
15660.00	Peak	44.38	13.53	57.90	74.00	-16.10
15660.00	Average	39.61	13.53	53.14	54.00	-0.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

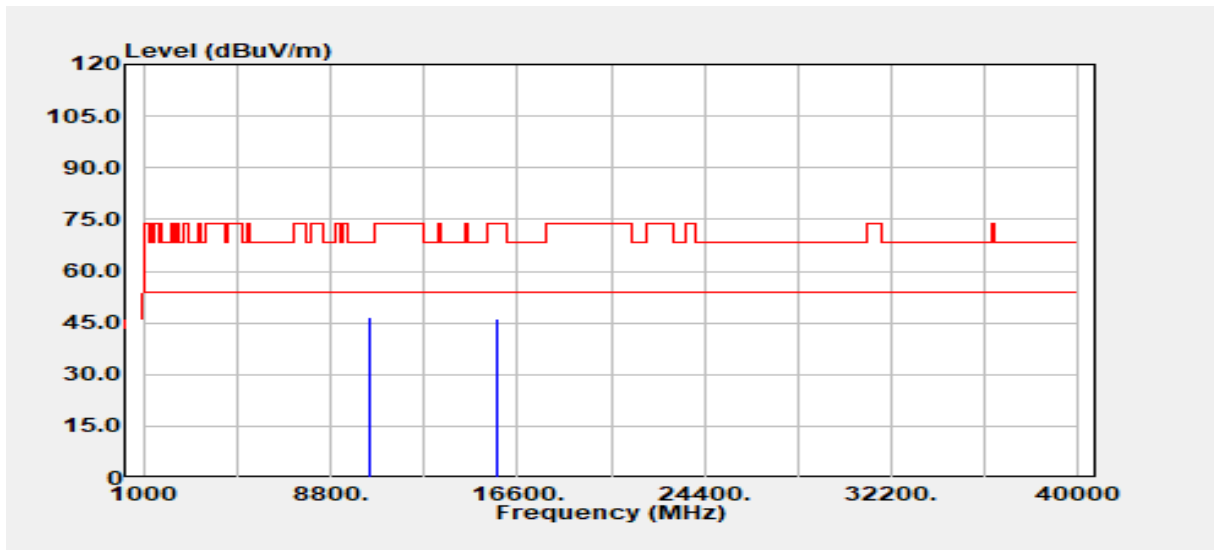


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	35.30	11.35	46.65	68.20	-21.55
15720.00	Peak	32.28	14.11	46.39	74.00	-27.61
15720.00	Average	29.42	14.11	43.52	54.00	-10.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

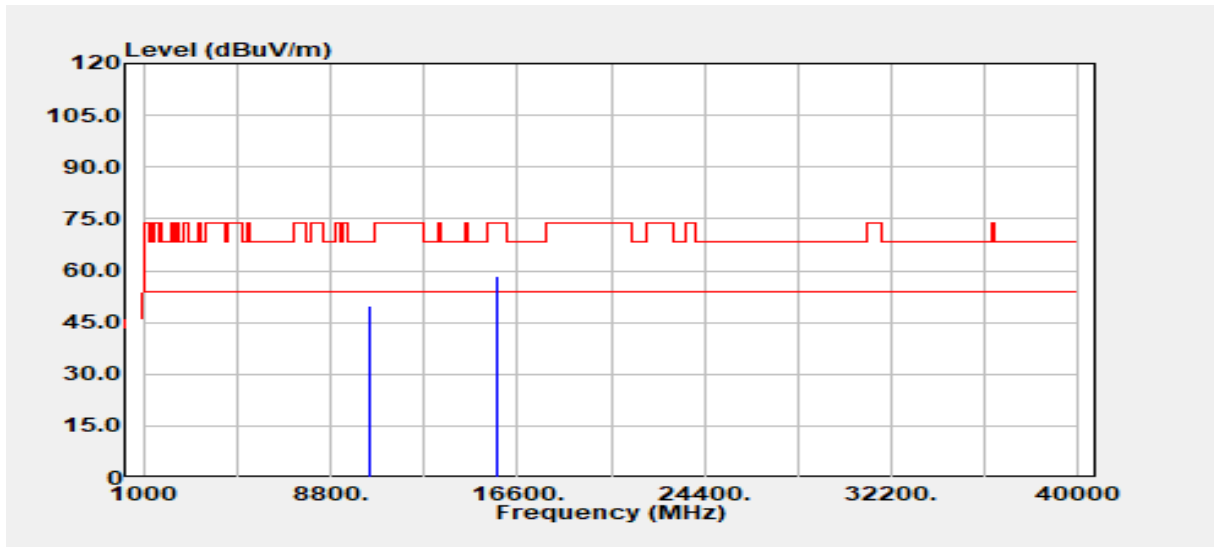

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10480.00	Peak	38.47	11.35	49.82	68.20	-18.38
15720.00	Peak	44.25	14.11	58.36	74.00	-15.64
15720.00	Average	38.91	14.11	53.02	54.00	-0.98
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-1

(4) MIMO:

Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

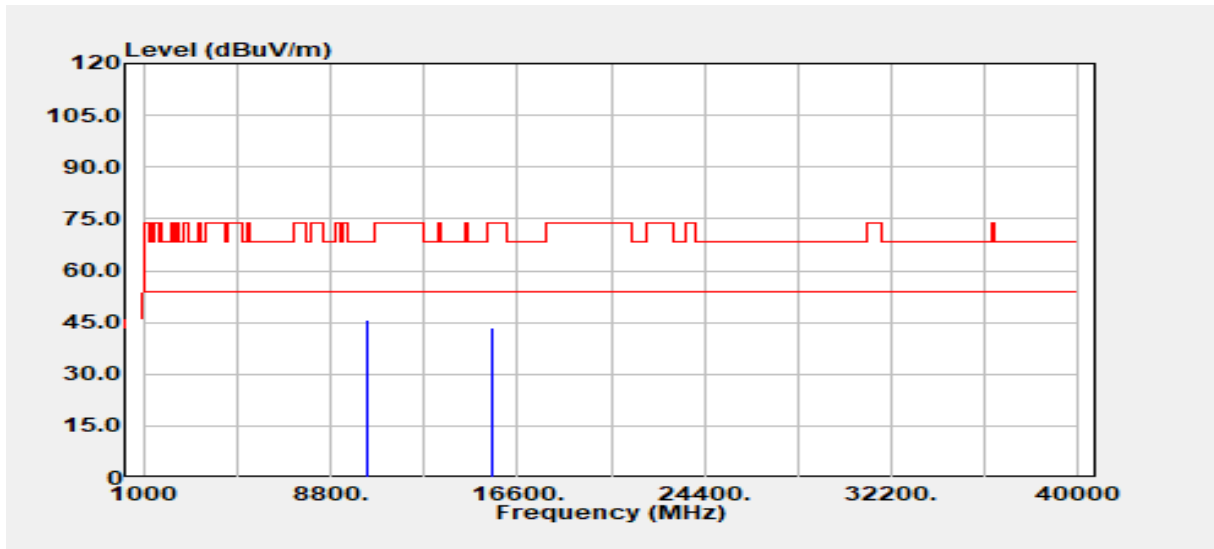


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	34.55	11.26	45.81	68.20	-22.39
15540.00	Peak	30.99	12.38	43.36	74.00	-30.64
15540.00	Average	22.00	12.38	34.38	54.00	-19.62
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

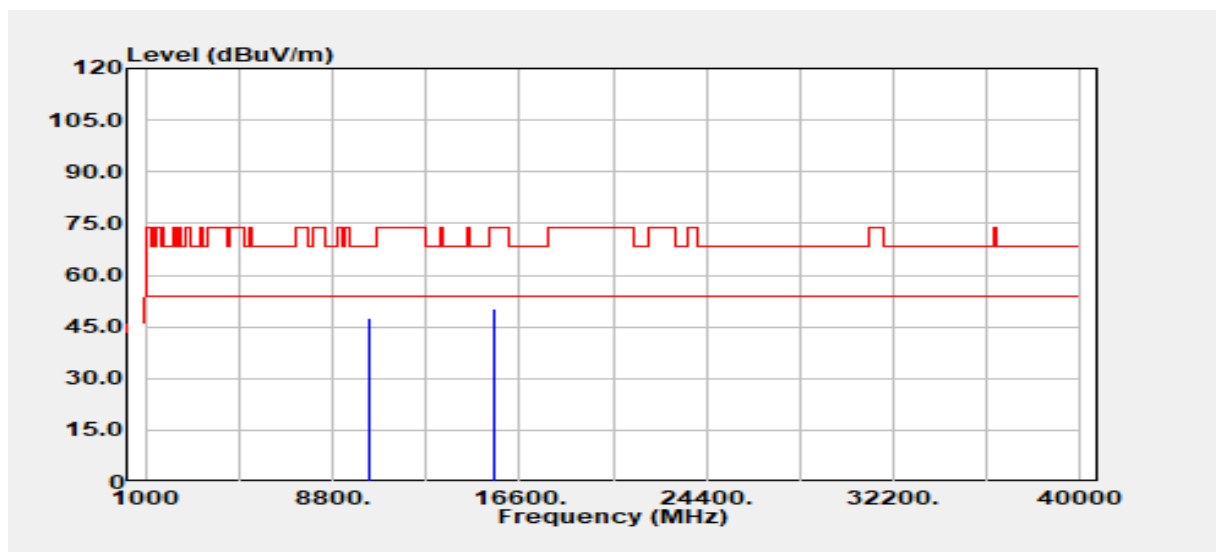


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	36.10	11.26	47.37	68.20	-20.83
15540.00	Peak	38.05	12.38	50.42	74.00	-23.58
15540.00	Average	29.37	12.38	41.75	54.00	-12.25
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5220 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

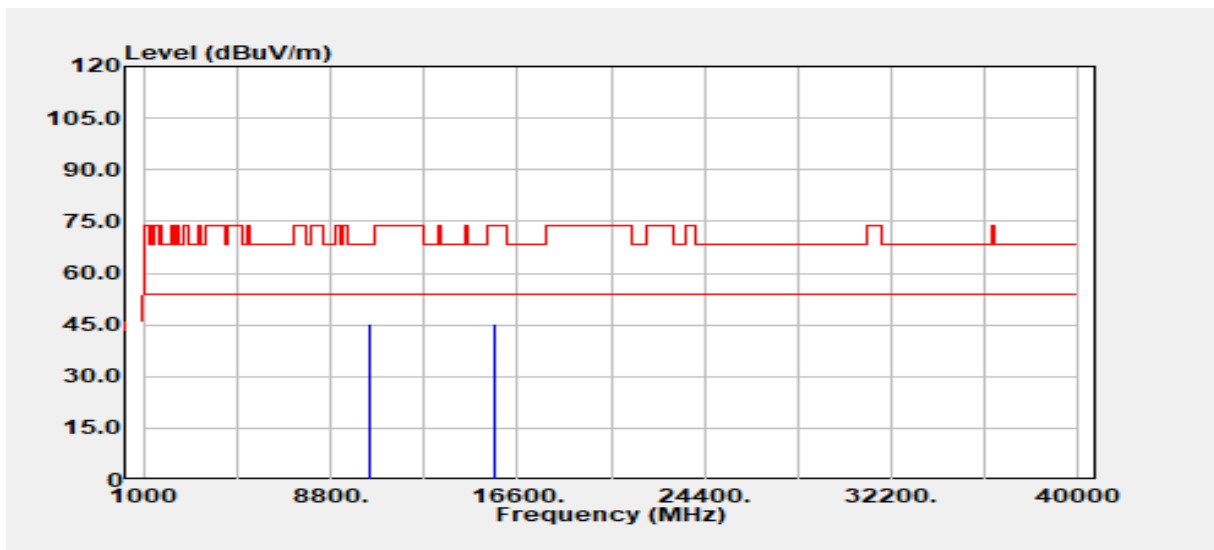


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	34.14	11.25	45.39	68.20	-22.81
15660.00	Peak	31.98	13.53	45.51	74.00	-28.49
15660.00	Average	23.17	13.53	36.70	54.00	-17.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5220 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

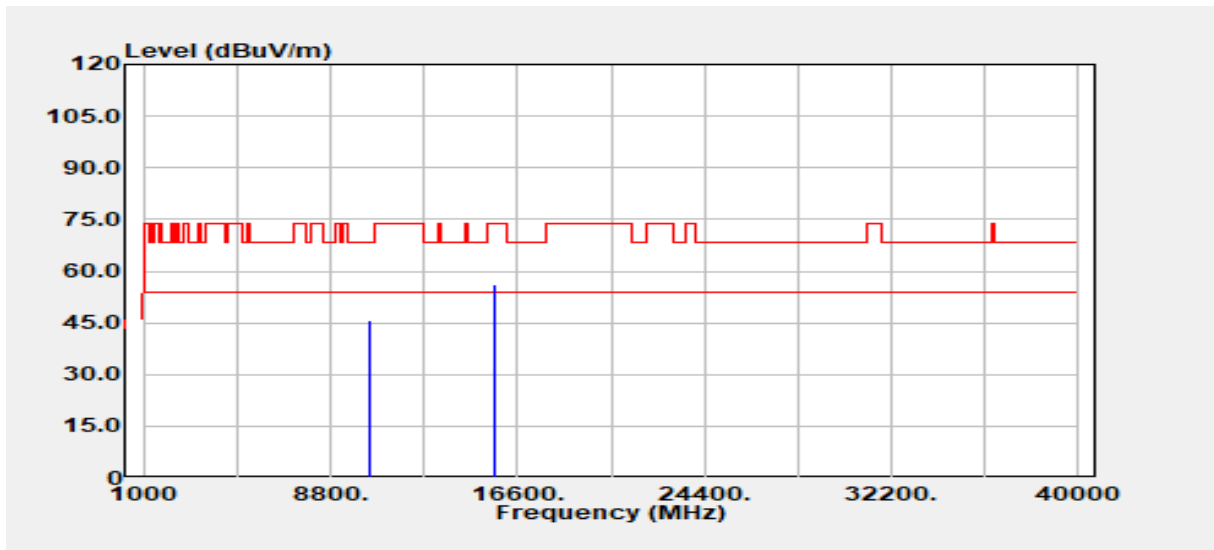


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	34.69	11.25	45.94	68.20	-22.26
15660.00	Peak	42.44	13.53	55.97	74.00	-18.03
15660.00	Average	32.65	13.53	46.18	54.00	-7.82
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5240 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

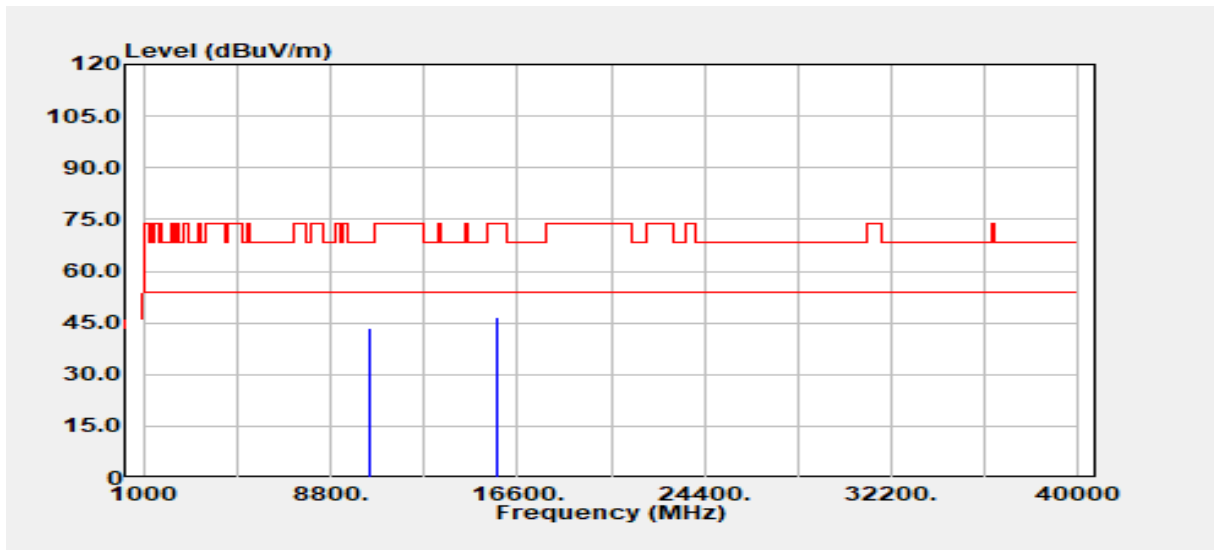


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	32.21	11.35	43.57	68.20	-24.63
15720.00	Peak	32.41	14.11	46.51	74.00	-27.49
15720.00	Average	22.58	14.11	36.69	54.00	-17.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5240 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

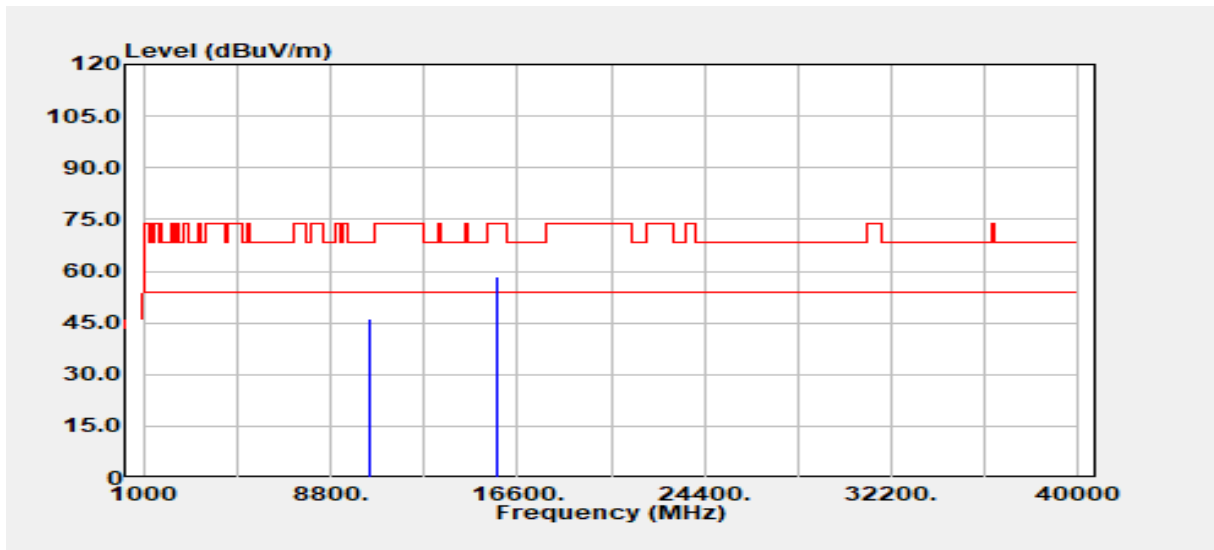


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	34.94	11.35	46.30	68.20	-21.90
15720.00	Peak	44.31	14.11	58.41	74.00	-15.59
15720.00	Average	32.60	14.11	46.71	54.00	-7.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

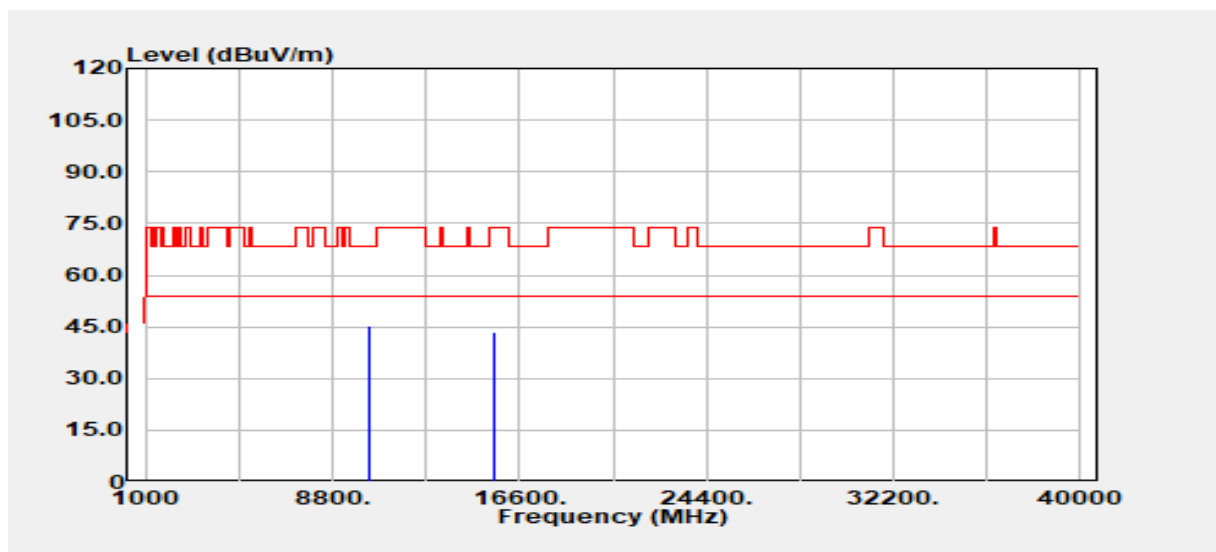


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	34.11	11.22	45.32	68.20	-22.88
15570.00	Peak	30.97	12.41	43.39	74.00	-30.61
15570.00	Average	23.30	12.41	35.72	54.00	-18.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

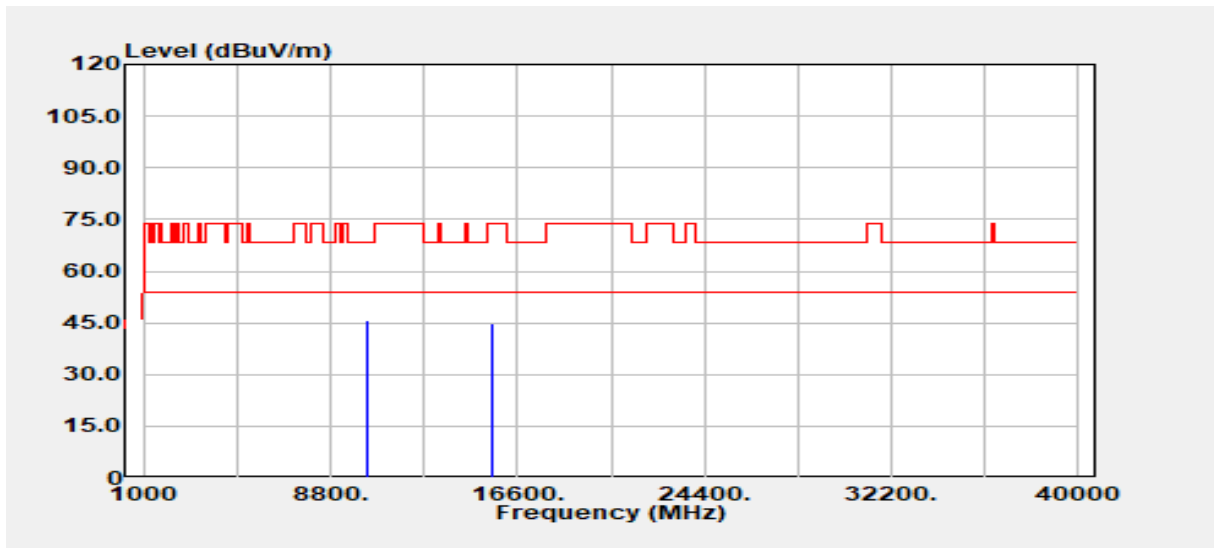


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	34.49	11.22	45.70	68.20	-22.50
15570.00	Peak	32.42	12.41	44.83	74.00	-29.17
15570.00	Average	25.76	12.41	38.17	54.00	-15.83
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5230 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

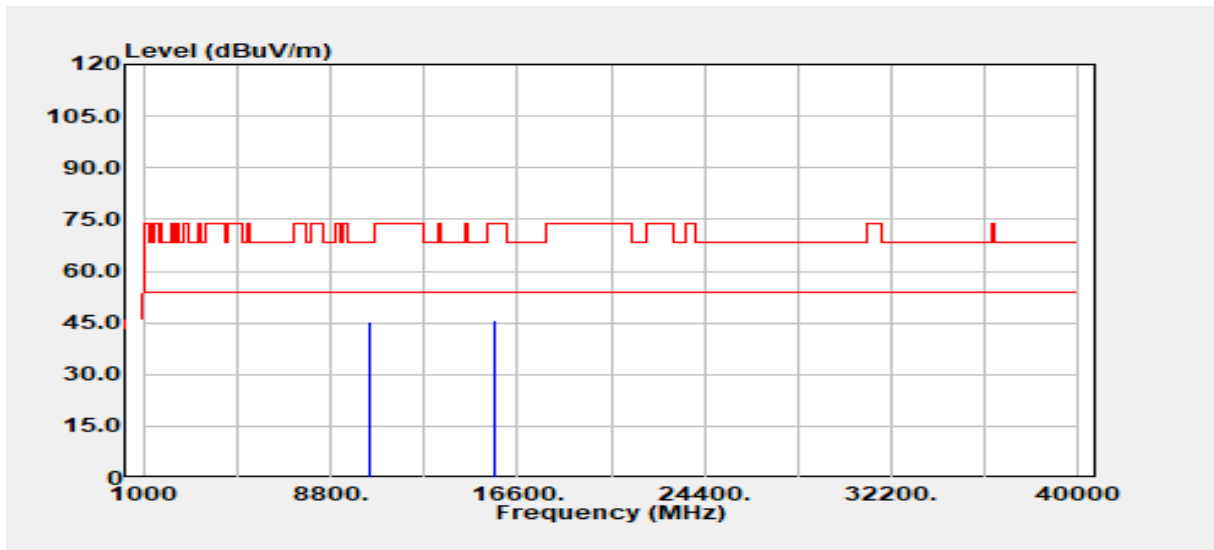


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	33.95	11.30	45.25	68.20	-22.95
15690.00	Peak	31.83	13.90	45.74	74.00	-28.26
15690.00	Average	25.19	13.90	39.10	54.00	-14.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5230 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

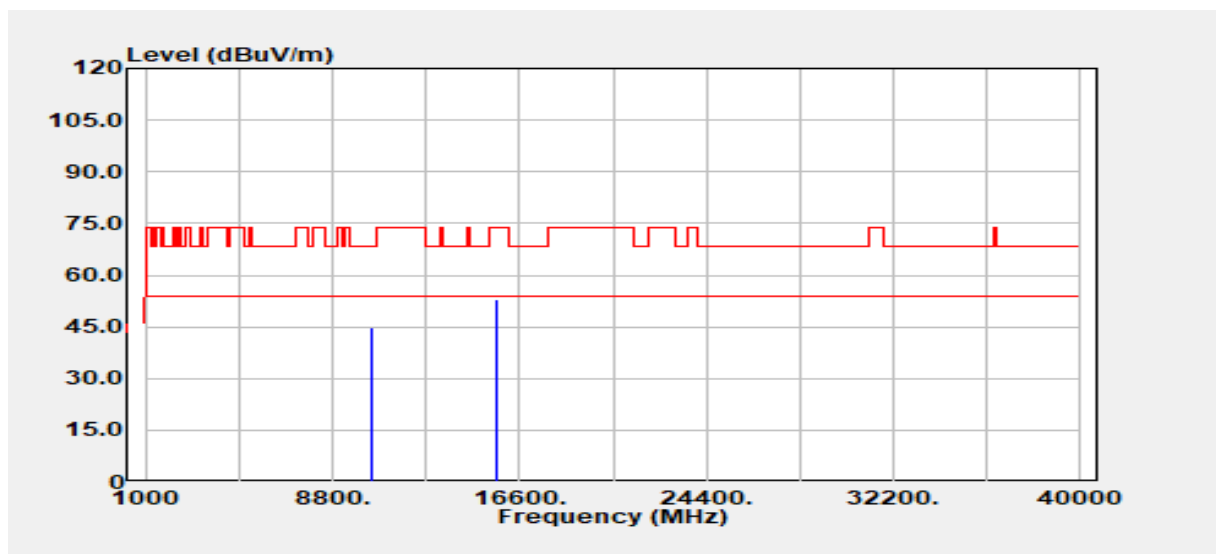


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	33.68	11.30	44.98	68.20	-23.22
15690.00	Peak	38.91	13.90	52.81	74.00	-21.19
15690.00	Average	34.30	13.90	48.21	54.00	-5.79
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

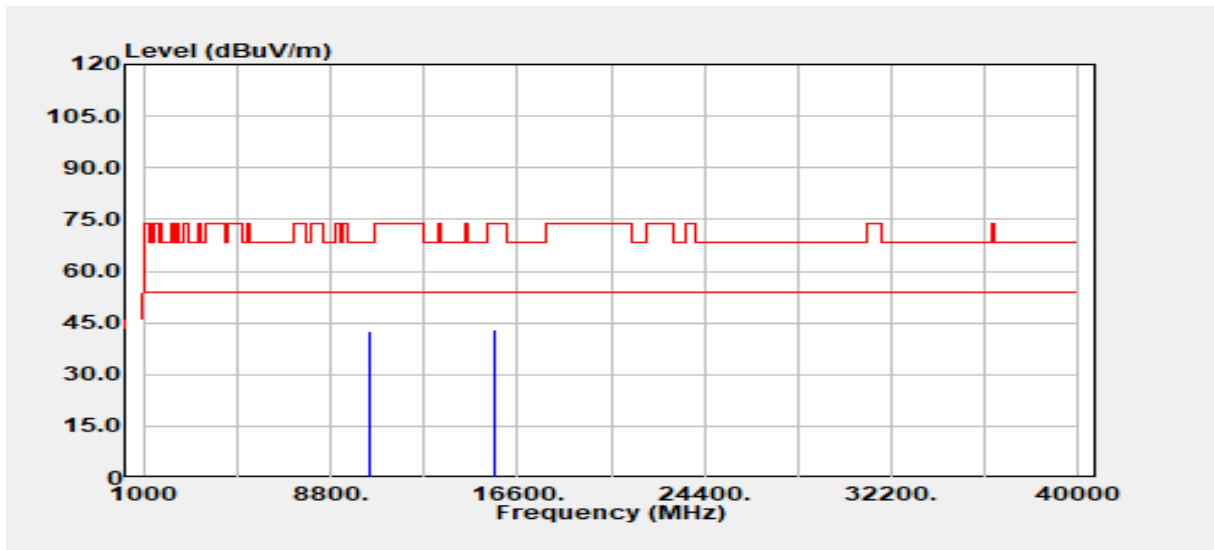


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	31.55	11.21	42.76	68.20	-25.44
15630.00	Peak	29.75	13.06	42.80	74.00	-31.20
15630.00	Average	24.23	13.06	37.29	54.00	-16.71
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

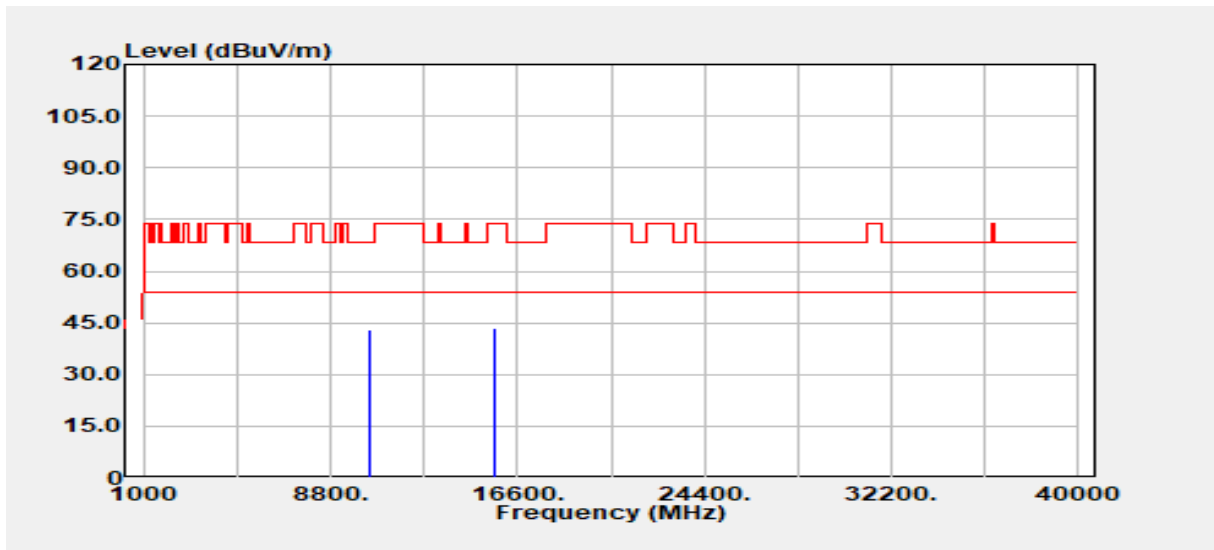


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	31.69	11.21	42.90	68.20	-25.30
15630.00	Peak	30.54	13.06	43.59	74.00	-30.41
15630.00	Average	23.90	13.06	36.95	54.00	-17.05
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

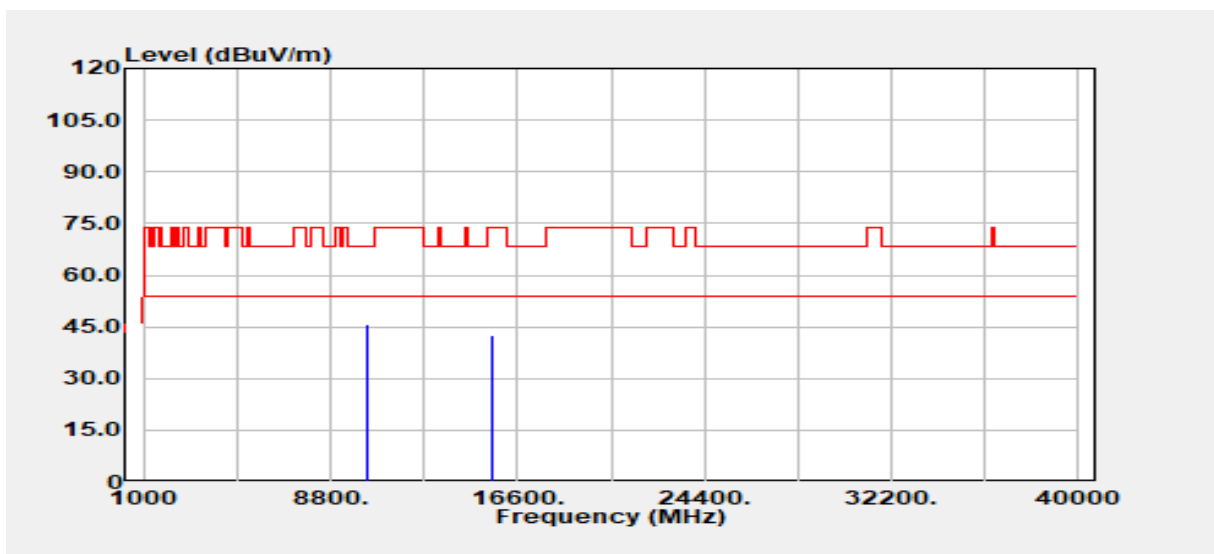


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	34.32	11.26	45.58	68.20	-22.62
15540.00	Peak	30.20	12.38	42.58	74.00	-31.42
15540.00	Average	25.09	12.38	37.47	54.00	-16.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5180 MHz_	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

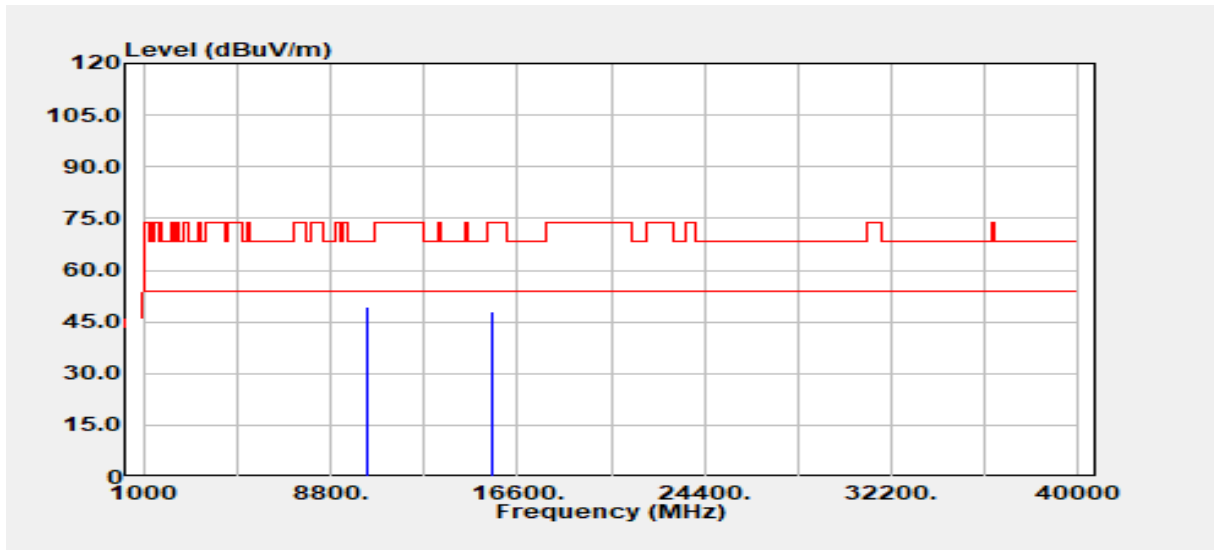


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	38.19	11.26	49.45	68.20	-18.75
15540.00	Peak	35.81	12.38	48.18	74.00	-25.82
15540.00	Average	32.47	12.38	44.84	54.00	-9.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5220 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

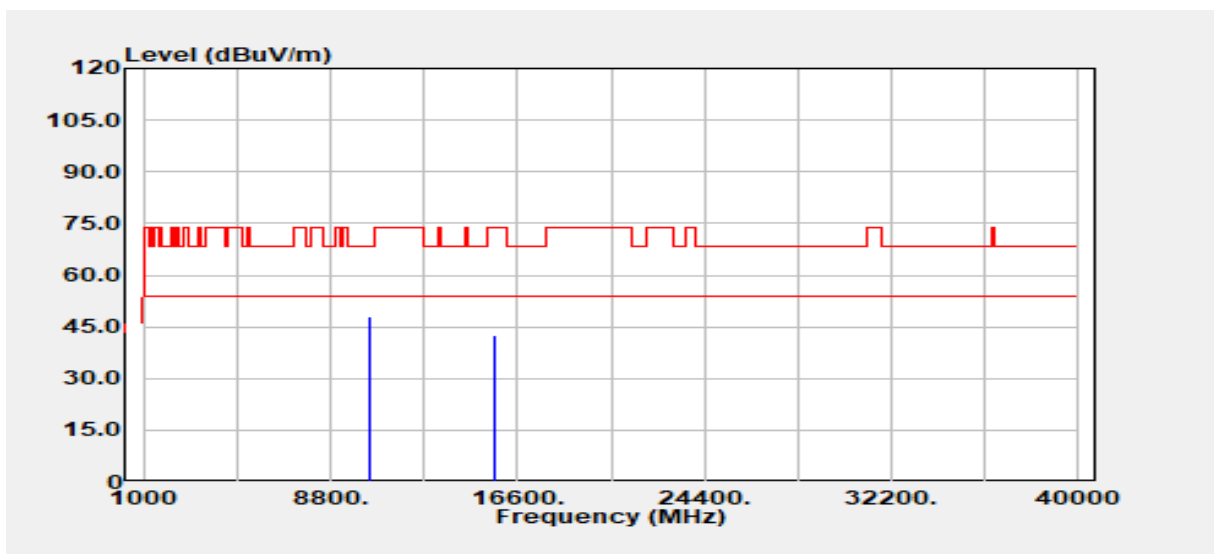


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	36.61	11.25	47.86	68.20	-20.34
15660.00	Peak	28.82	13.53	42.34	74.00	-31.66
15660.00	Average	25.00	13.53	38.53	54.00	-15.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5220 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

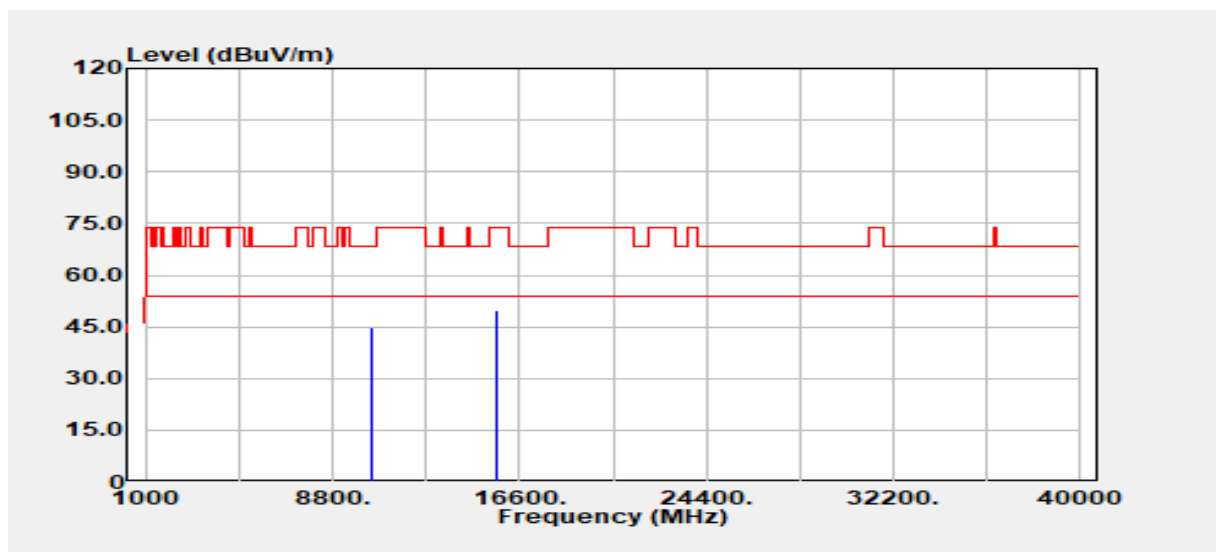


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	33.72	11.25	44.97	68.20	-23.23
15660.00	Peak	36.35	13.53	49.87	74.00	-24.13
15660.00	Average	33.30	13.53	46.83	54.00	-7.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5240 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

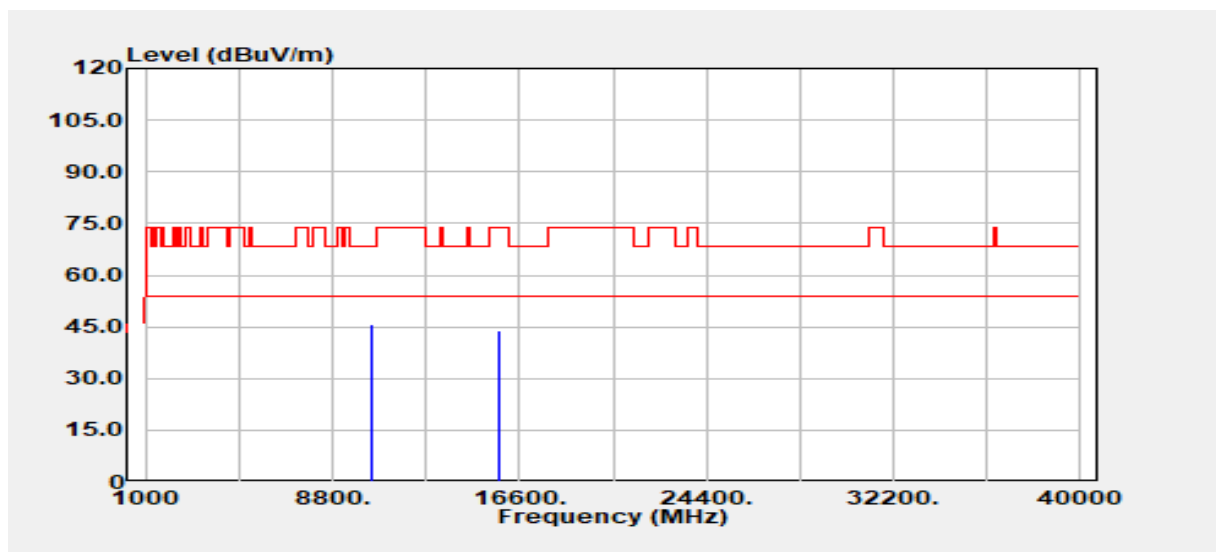


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	34.24	11.35	45.60	68.20	-22.60
15720.00	Peak	29.60	14.11	43.71	74.00	-30.29
15720.00	Average	25.29	14.11	39.40	54.00	-14.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5240 MHz_	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

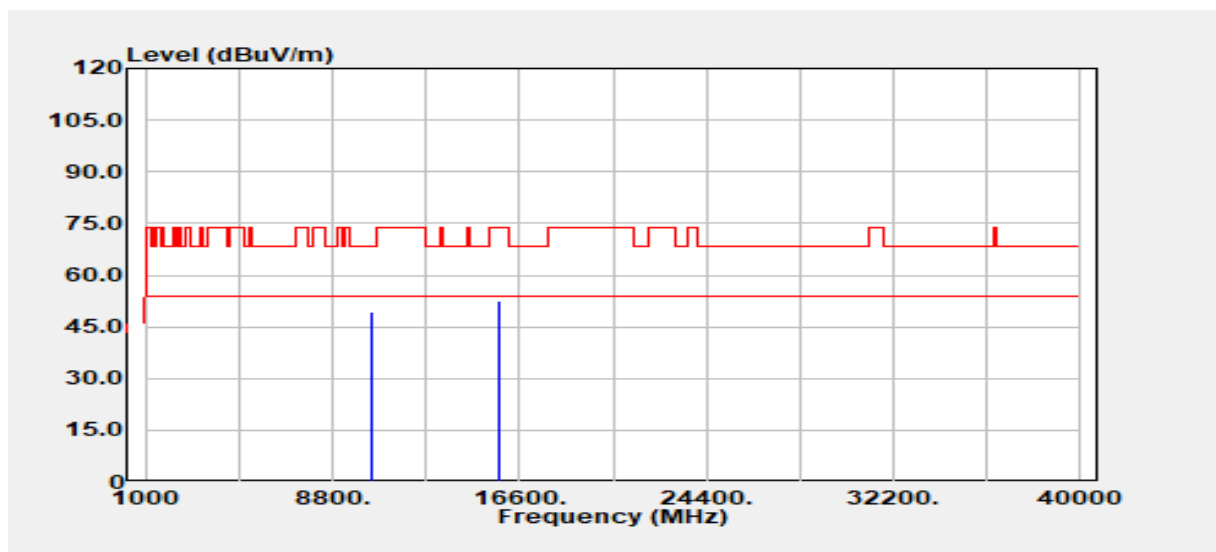


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10480.00	Peak	37.86	11.35	49.21	68.20	-18.99
15720.00	Peak	38.65	14.11	52.75	74.00	-21.25
15720.00	Average	35.01	14.11	49.11	54.00	-4.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

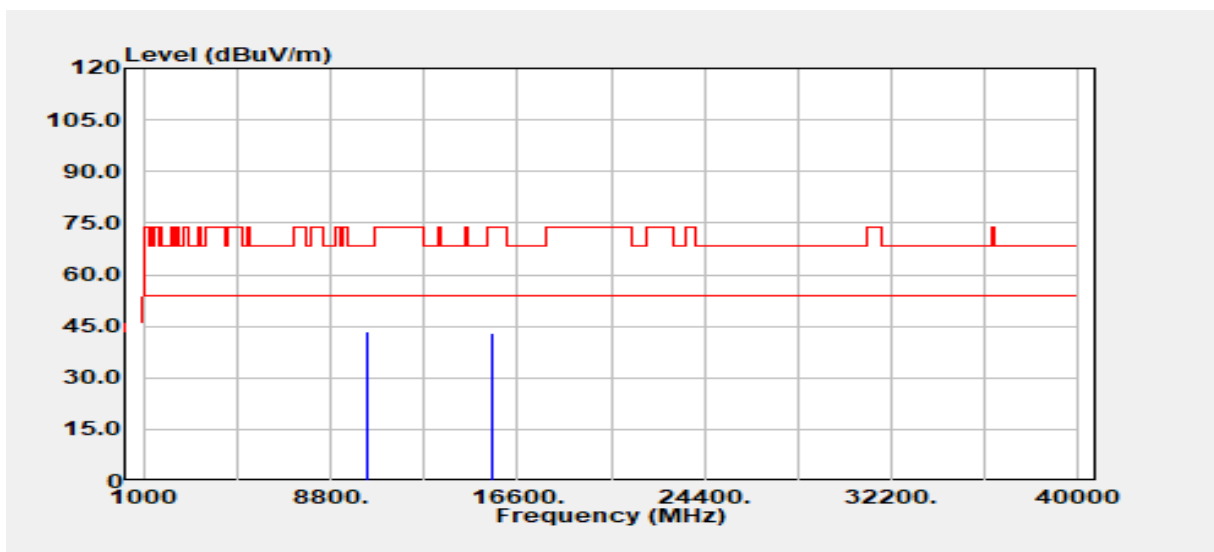


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	32.18	11.22	43.39	68.20	-24.81
15570.00	Peak	30.53	12.41	42.94	74.00	-31.06
15570.00	Average	22.90	12.41	35.31	54.00	-18.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

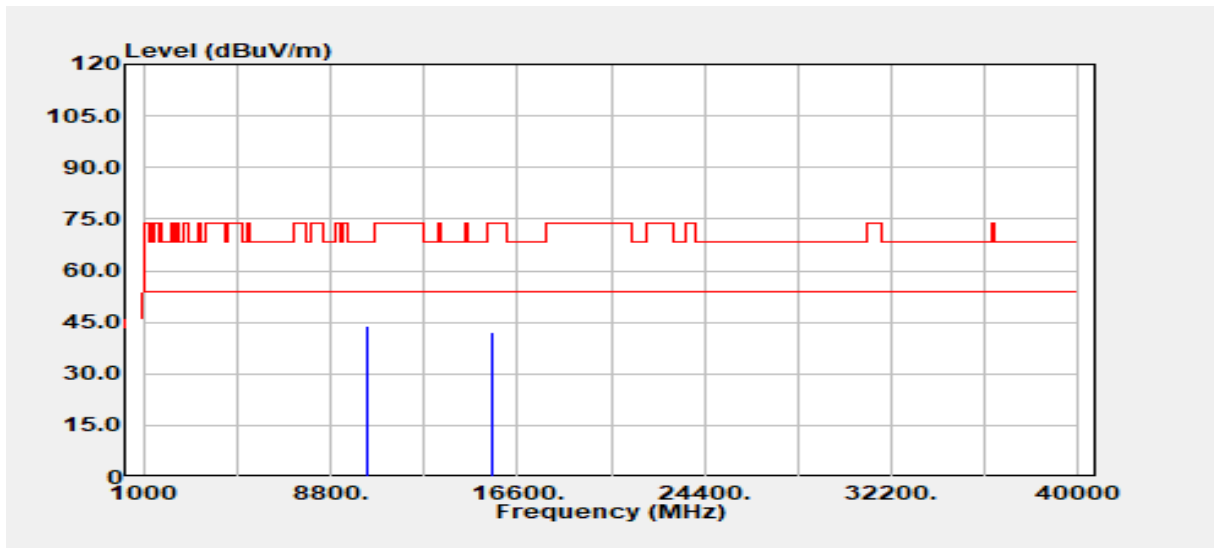


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	32.66	11.22	43.88	68.20	-24.32
15570.00	Peak	29.49	12.41	41.91	74.00	-32.09
15570.00	Average	22.65	12.41	35.07	54.00	-18.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5230 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

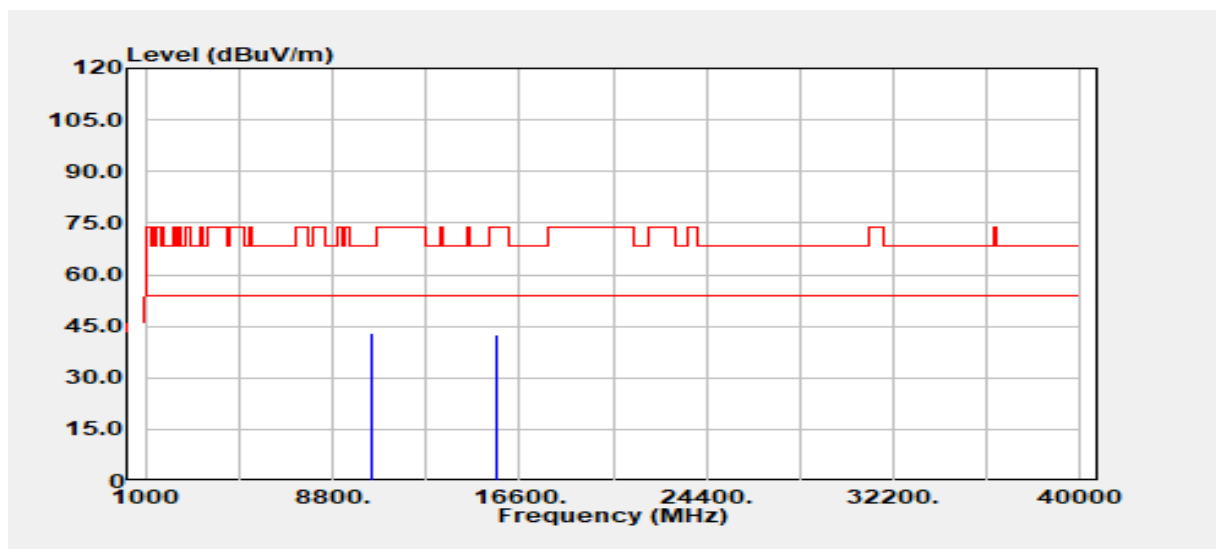


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	31.90	11.30	43.20	68.20	-25.00
15690.00	Peak	28.86	13.90	42.77	74.00	-31.23
15690.00	Average	24.25	13.90	38.16	54.00	-15.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5230 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

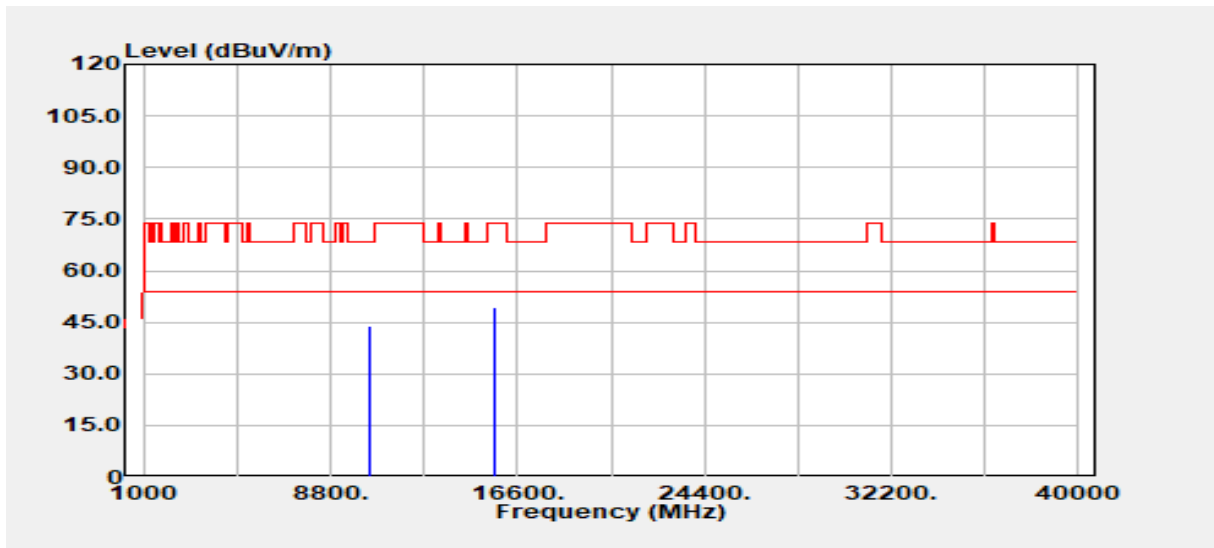


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	32.61	11.30	43.90	68.20	-24.30
15690.00	Peak	35.27	13.90	49.17	74.00	-24.83
15690.00	Average	33.49	13.90	47.40	54.00	-6.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

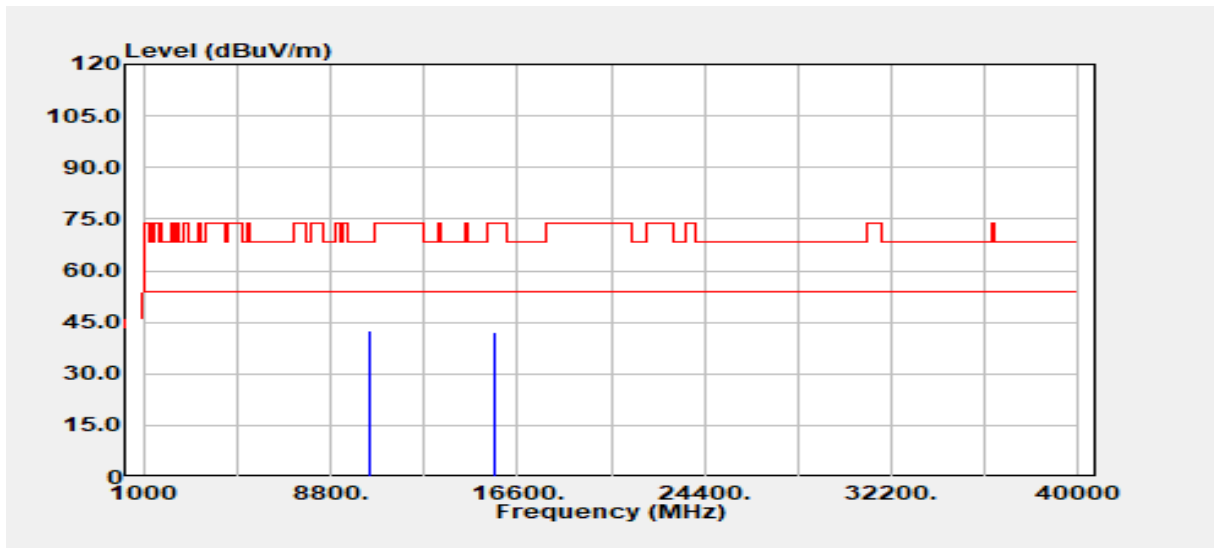


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	31.44	11.21	42.65	68.20	-25.55
15630.00	Peak	29.04	13.06	42.10	74.00	-31.90
15630.00	Average	23.55	13.06	36.60	54.00	-17.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

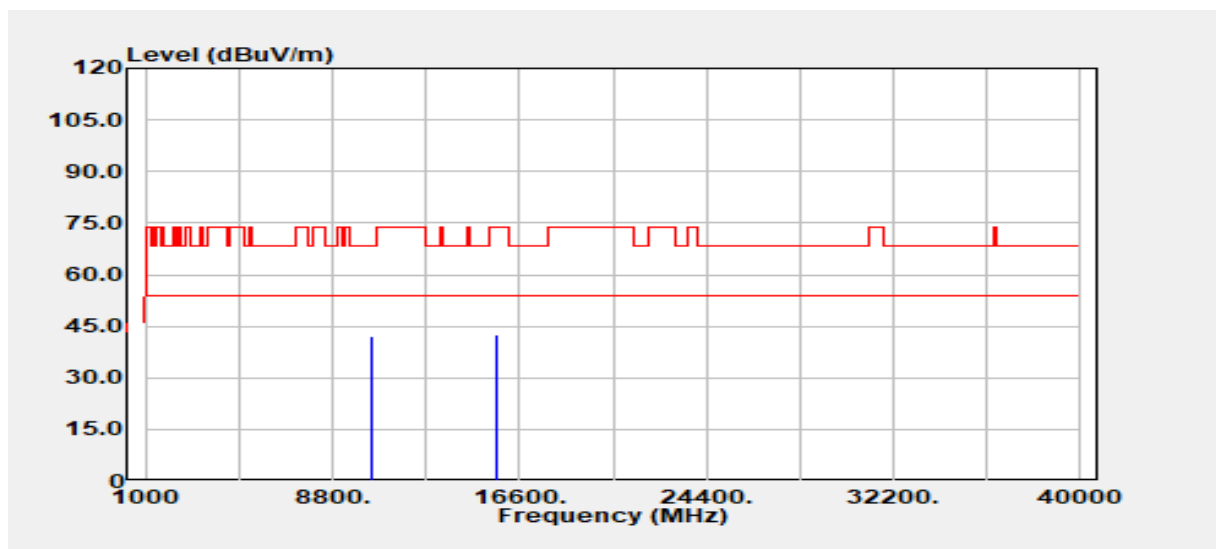

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	30.98	11.21	42.19	68.20	-26.01
15630.00	Peak	29.31	13.06	42.37	74.00	-31.63
15630.00	Average	23.53	13.06	36.58	54.00	-17.42
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2a

(1) Chain 0:

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

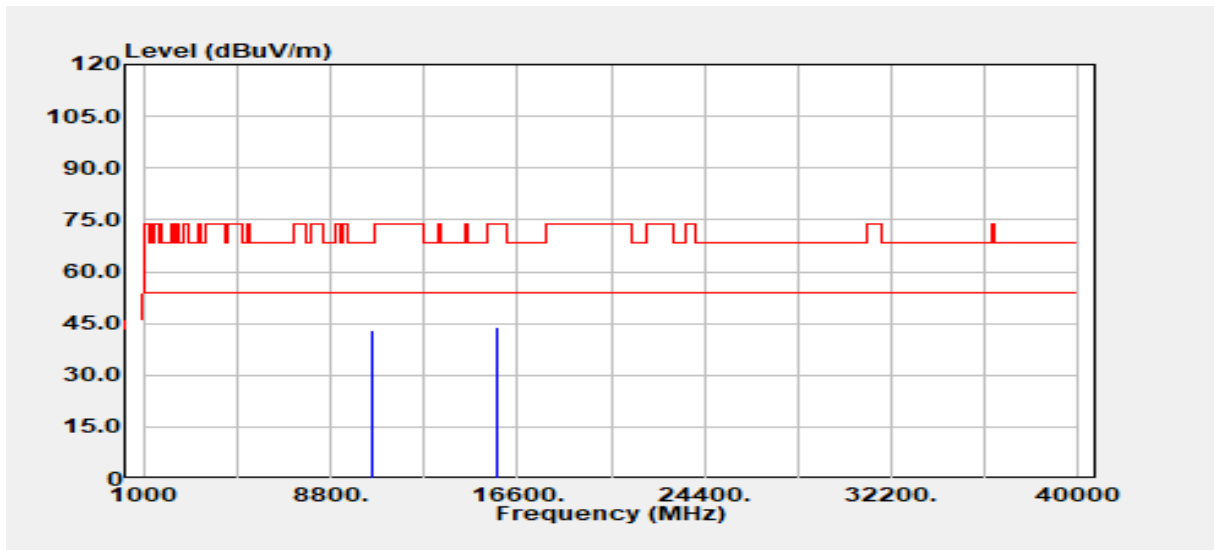


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	31.61	11.41	43.02	68.20	-25.18
15780.00	Peak	29.82	14.08	43.90	74.00	-30.10
15780.00	Average	25.90	14.08	39.97	54.00	-14.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

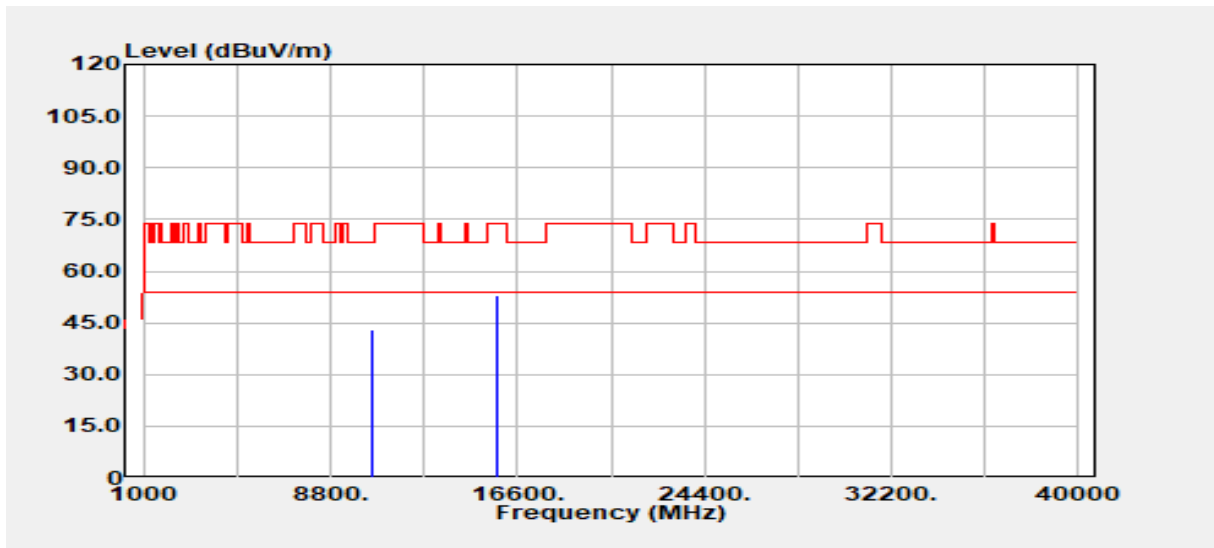


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	31.52	11.41	42.93	68.20	-25.27
15780.00	Peak	38.93	14.08	53.00	74.00	-21.00
15780.00	Average	35.97	14.08	50.05	54.00	-3.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

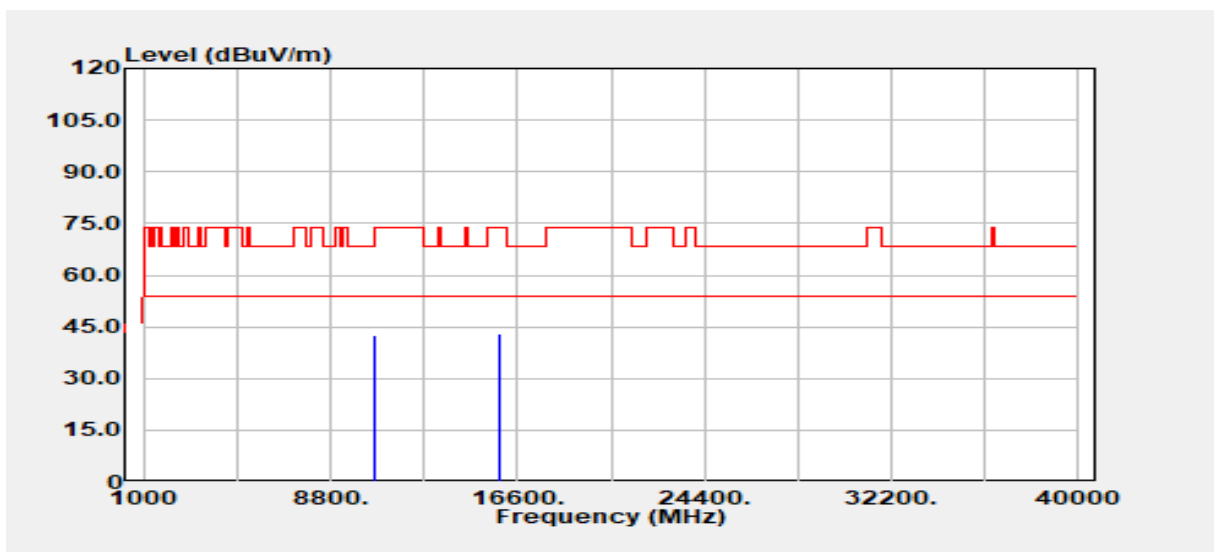


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	30.87	11.53	42.40	68.20	-25.80
15900.00	Peak	28.61	14.45	43.06	74.00	-30.94
15900.00	Average	23.74	14.45	38.19	54.00	-15.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

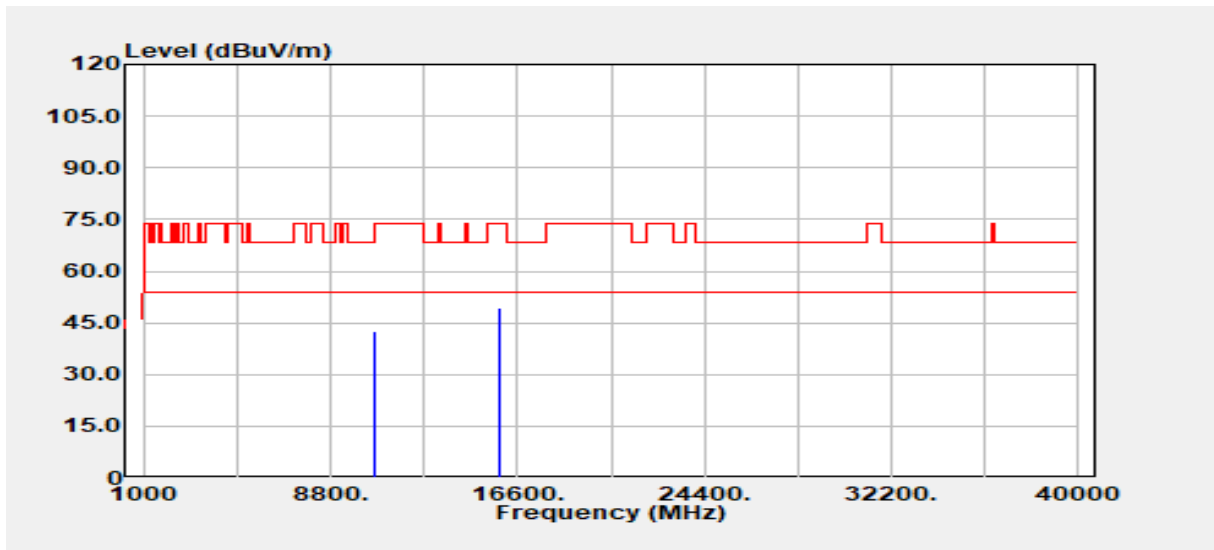


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	30.92	11.53	42.45	68.20	-25.75
15900.00	Peak	34.92	14.45	49.37	74.00	-24.63
15900.00	Average	34.77	14.45	49.22	54.00	-4.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

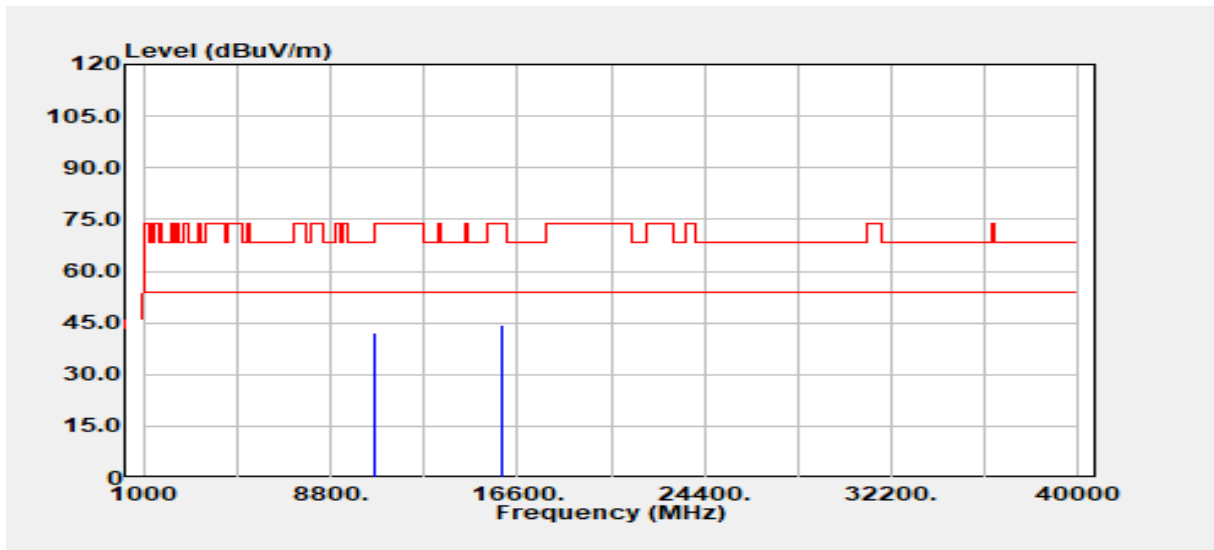


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10640.00	Peak	30.77	11.50	42.28	74.00	-31.72
10640.00	Average	25.01	11.50	36.51	54.00	-17.49
15960.00	Peak	29.28	15.09	44.37	74.00	-29.63
15960.00	Average	26.06	15.09	41.15	54.00	-12.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

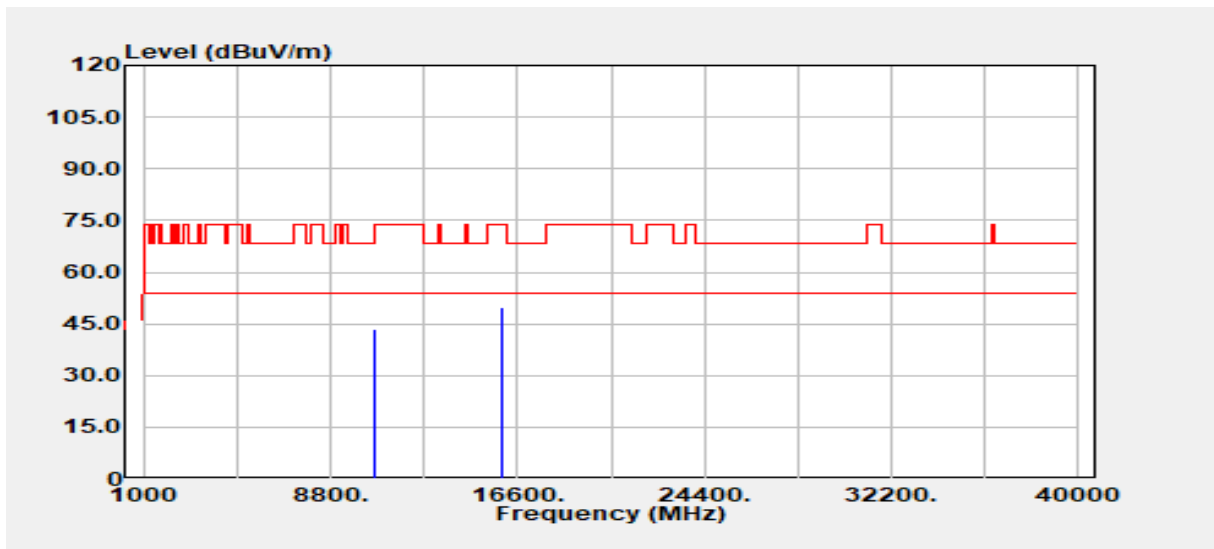

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	31.89	11.50	43.39	74.00	-30.61
10640.00	Average	25.62	11.50	37.13	54.00	-16.87
15960.00	Peak	34.58	15.09	49.67	74.00	-24.33
15960.00	Average	32.60	15.09	47.69	54.00	-6.31
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2a

(2) Chain 1:

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

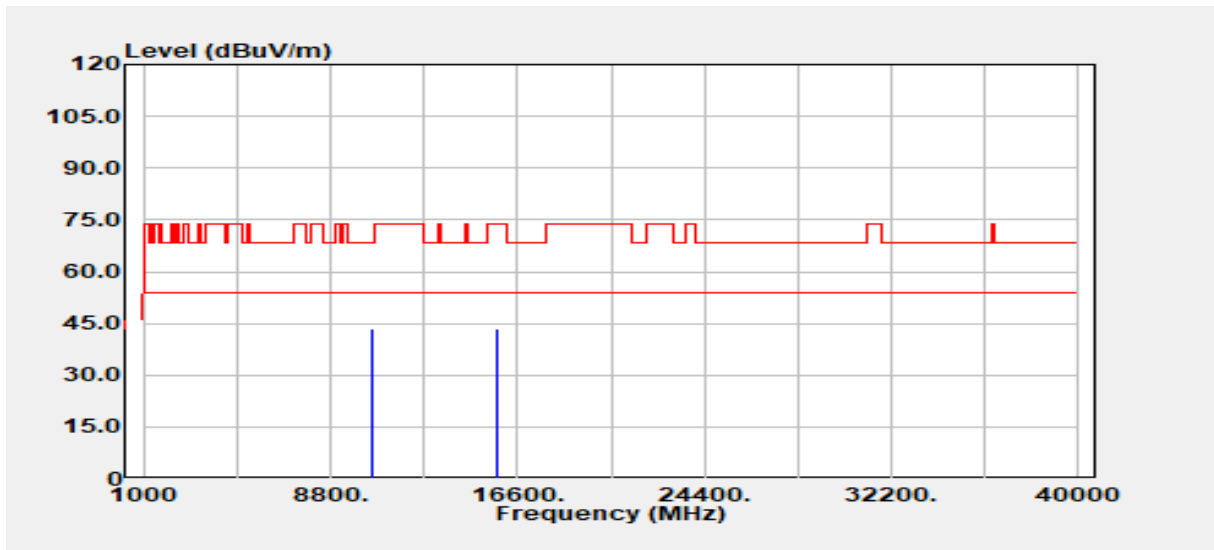


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	32.25	11.41	43.66	68.20	-24.54
15780.00	Peak	29.56	14.08	43.64	74.00	-30.36
15780.00	Average	28.18	14.08	42.26	54.00	-11.74
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

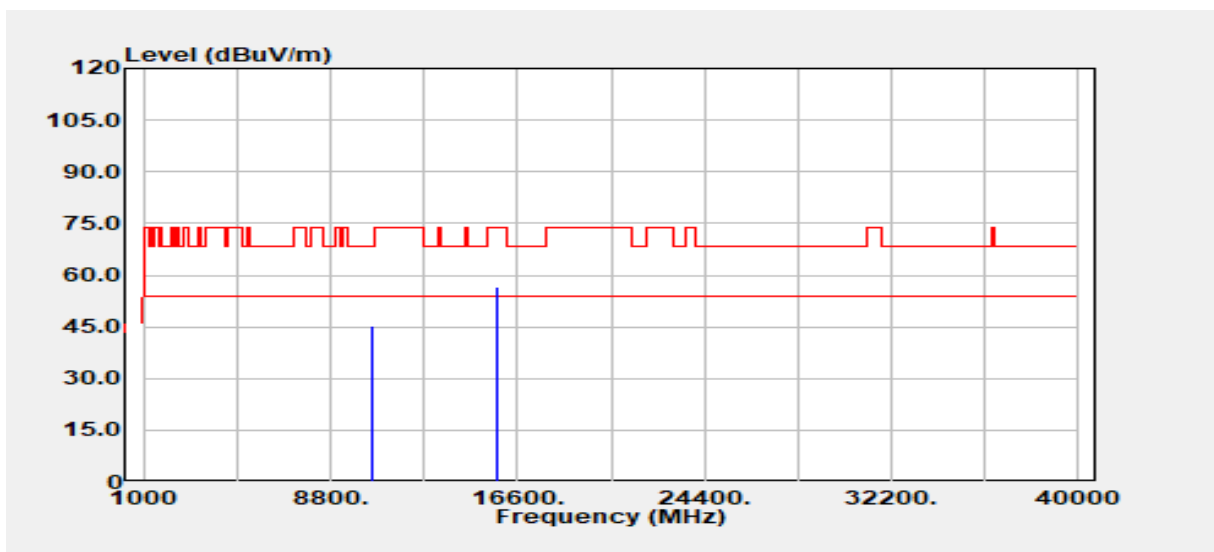


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	34.04	11.41	45.45	68.20	-22.75
15780.00	Peak	42.62	14.08	56.69	74.00	-17.31
15780.00	Average	37.57	14.08	51.65	54.00	-2.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

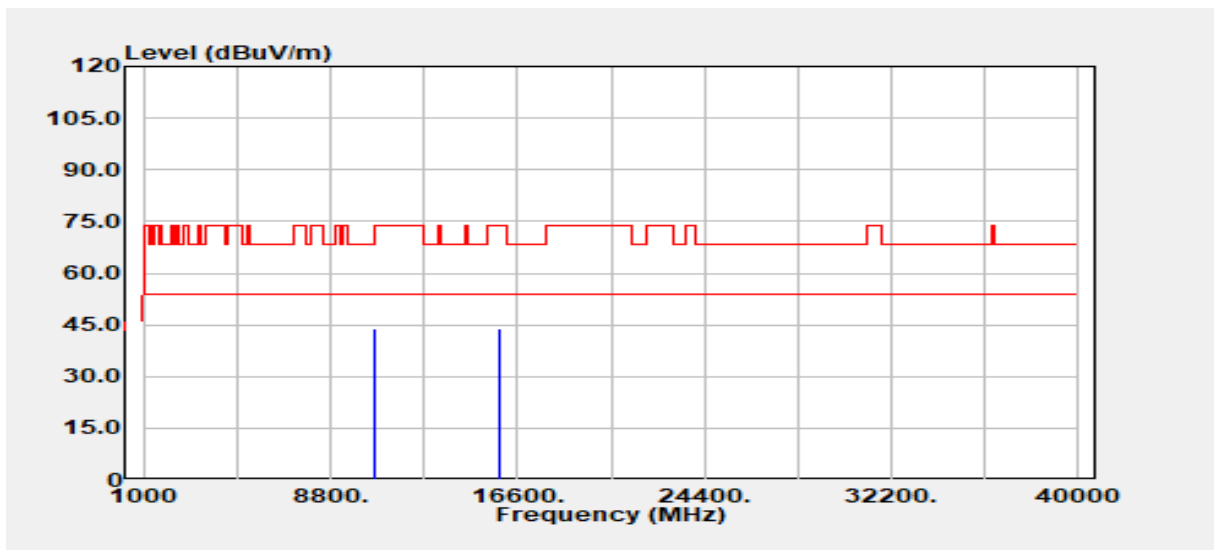


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	32.48	11.53	44.01	68.20	-24.19
15900.00	Peak	29.62	14.45	44.07	74.00	-29.93
15900.00	Average	25.89	14.45	40.34	54.00	-13.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

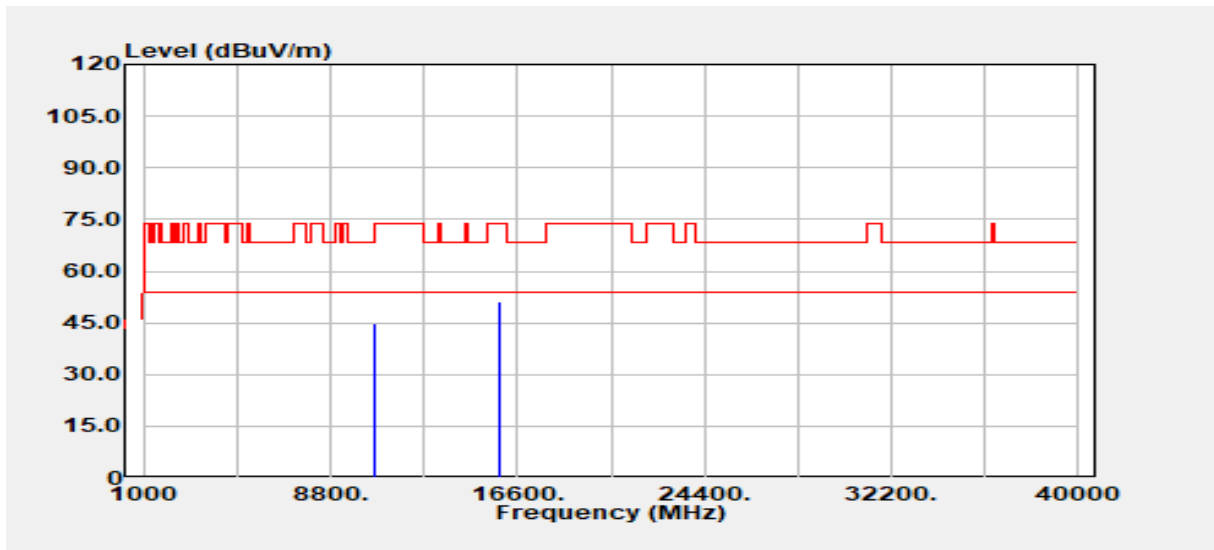


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	33.36	11.53	44.89	68.20	-23.31
15900.00	Peak	36.40	14.45	50.85	74.00	-23.15
15900.00	Average	36.84	14.45	51.29	54.00	-2.71
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

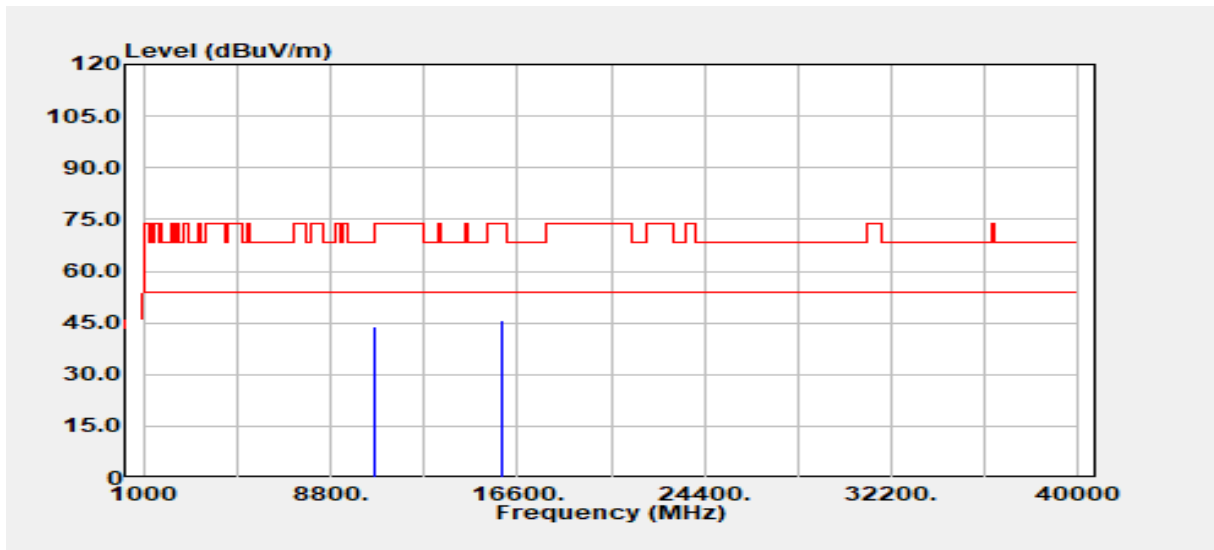


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10640.00	Peak	32.43	11.50	43.93	74.00	-30.07
10640.00	Average	26.88	11.50	38.38	54.00	-15.62
15960.00	Peak	30.54	15.09	45.62	74.00	-28.38
15960.00	Average	25.55	15.09	40.64	54.00	-13.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

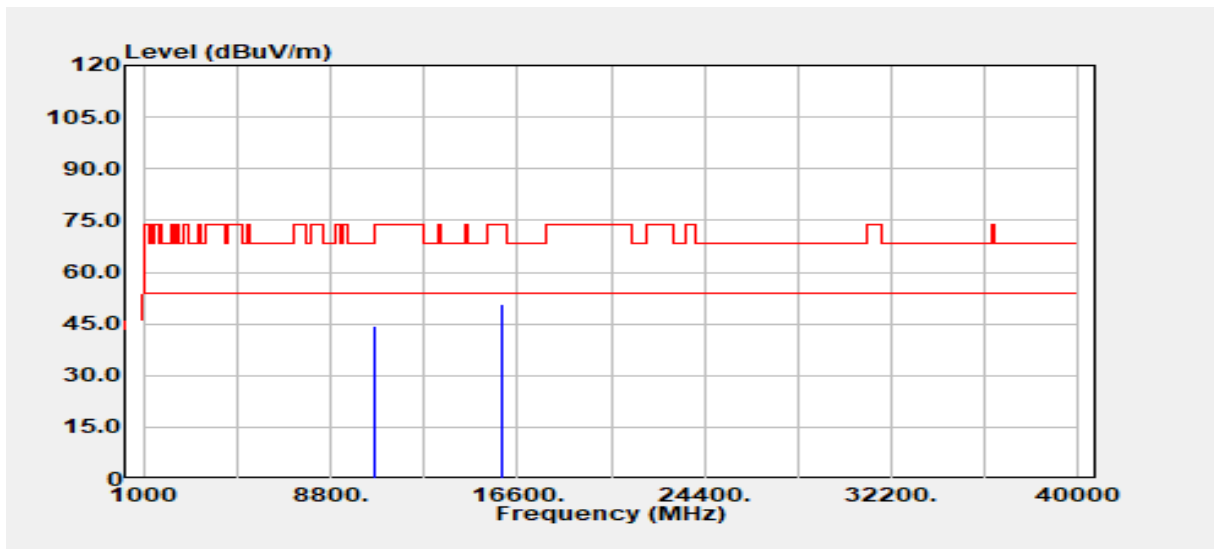

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10640.00	Peak	32.69	11.50	44.20	74.00	-29.80
10640.00	Average	28.18	11.50	39.68	54.00	-14.32
15960.00	Peak	35.48	15.09	50.57	74.00	-23.43
15960.00	Average	34.72	15.09	49.81	54.00	-4.19
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2a

(3) Chain 2:

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

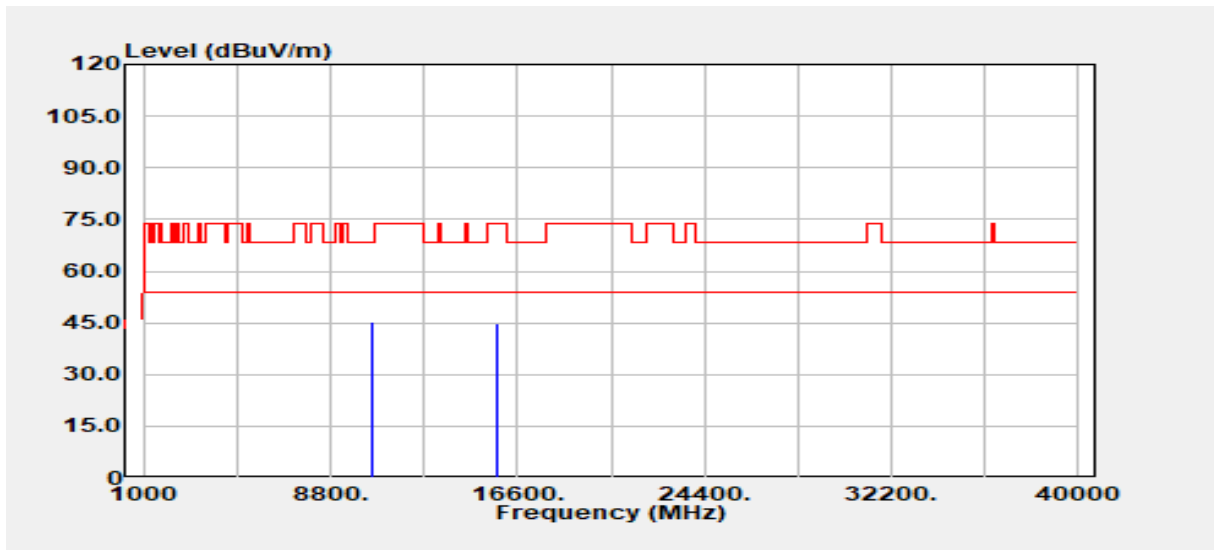


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	33.83	11.41	45.24	68.20	-22.96
15780.00	Peak	30.94	14.08	45.01	74.00	-28.99
15780.00	Average	28.63	14.08	42.70	54.00	-11.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

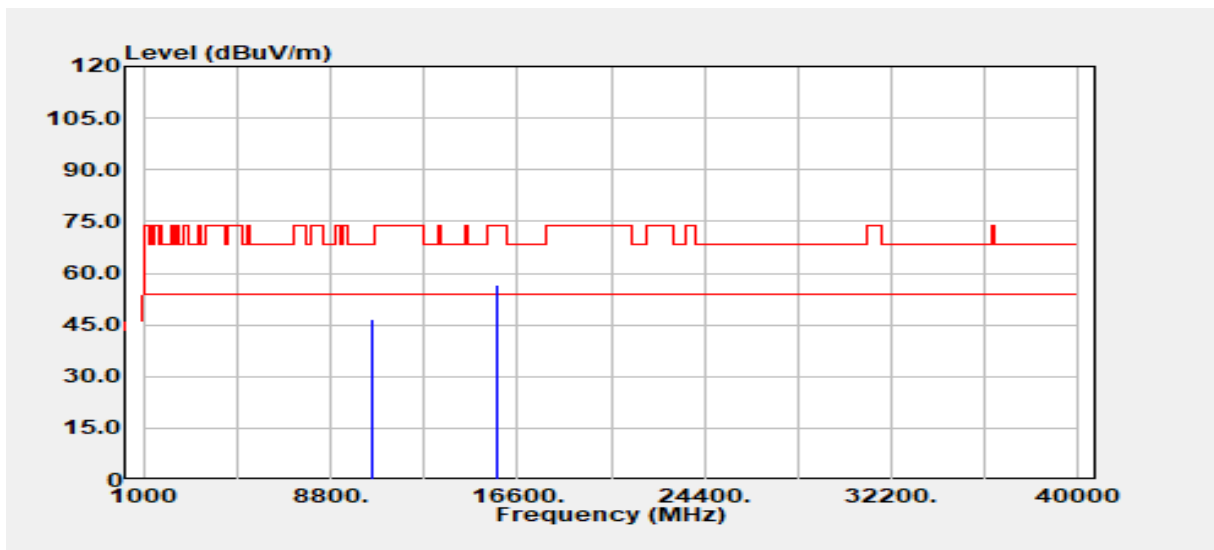


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10520.00	Peak	35.01	11.41	46.42	68.20	-21.78
15780.00	Peak	42.46	14.08	56.54	74.00	-17.46
15780.00	Average	35.55	14.08	49.63	54.00	-4.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

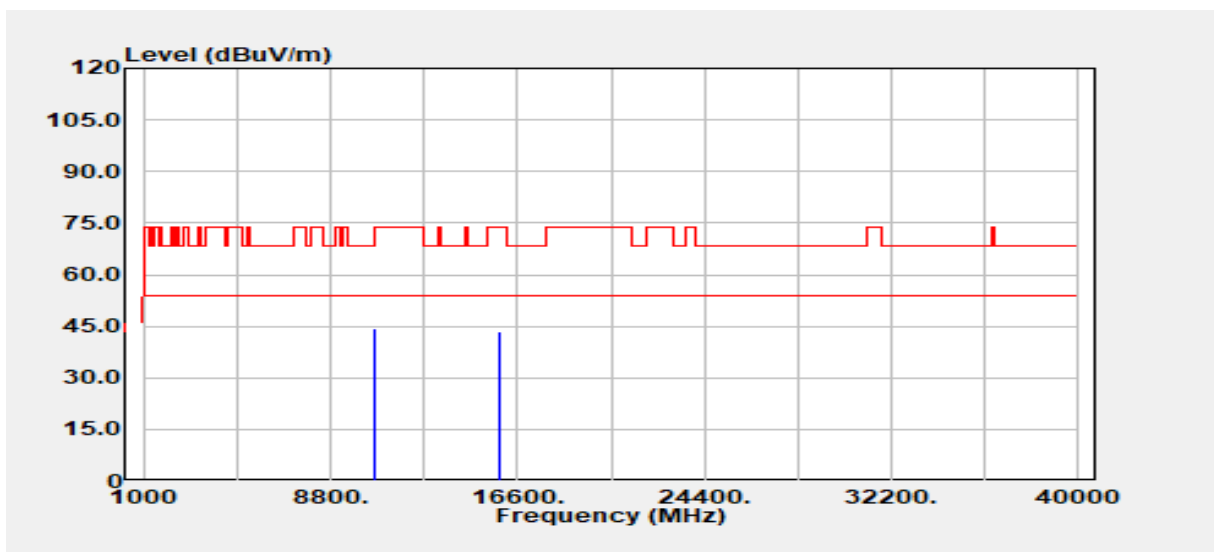


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	32.96	11.53	44.49	68.20	-23.71
15900.00	Peak	29.00	14.45	43.45	74.00	-30.55
15900.00	Average	25.66	14.45	40.11	54.00	-13.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5300 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

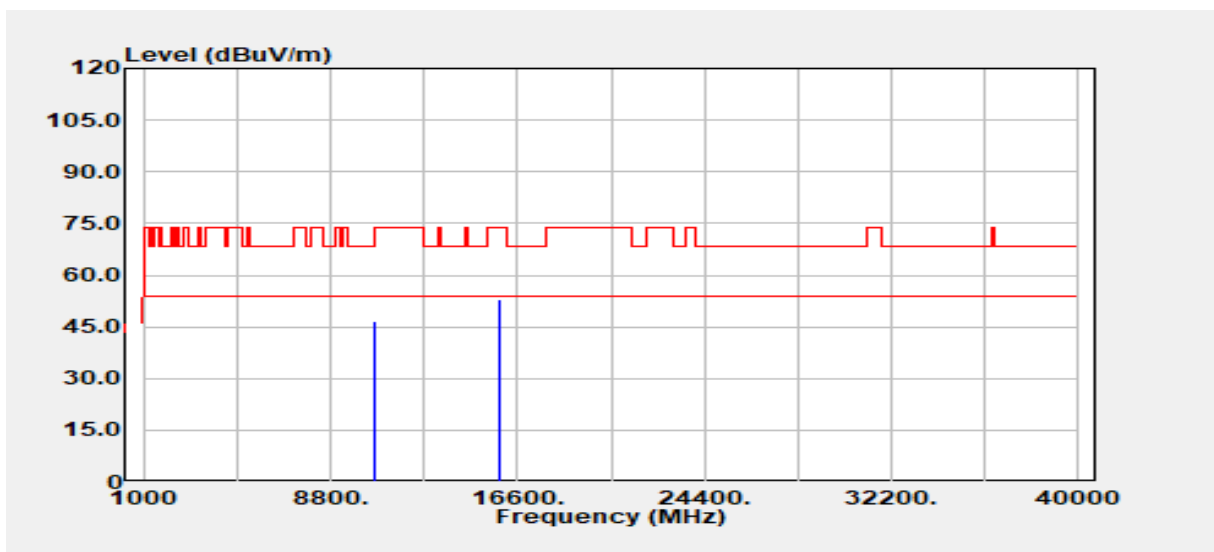


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	35.08	11.53	46.61	68.20	-21.59
15900.00	Peak	38.41	14.45	52.86	74.00	-21.14
15900.00	Average	35.06	14.45	49.51	54.00	-4.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

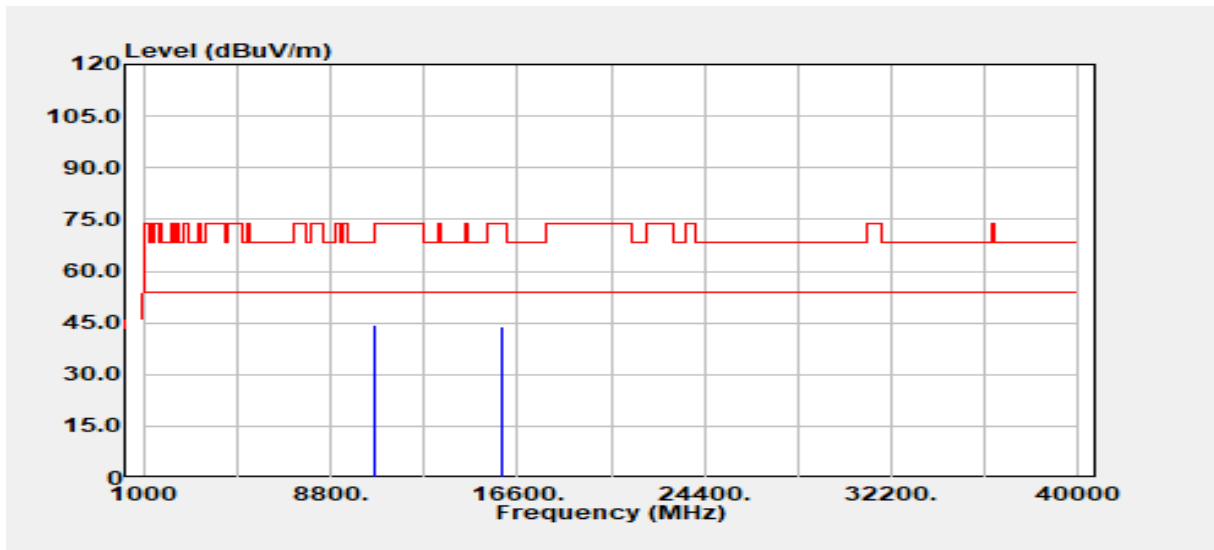


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	32.85	11.50	44.35	74.00	-29.65
10640.00	Average	27.06	11.50	38.56	54.00	-15.44
15960.00	Peak	29.00	15.09	44.09	74.00	-29.91
15960.00	Average	24.51	15.09	39.60	54.00	-14.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

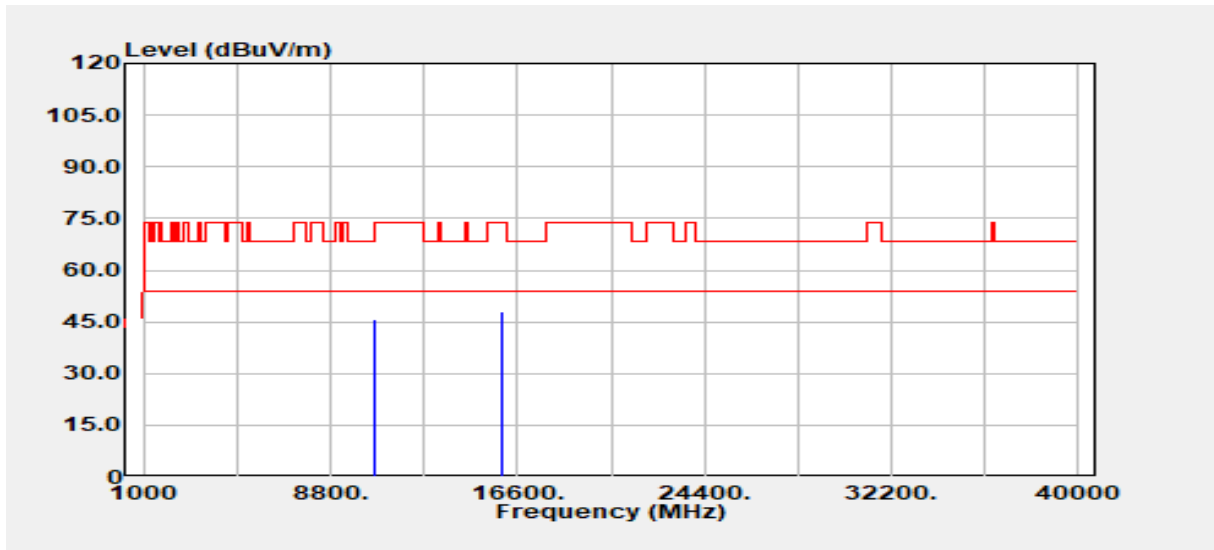

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	34.03	11.50	45.53	74.00	-28.47
10640.00	Average	29.69	11.50	41.19	54.00	-12.81
15960.00	Peak	33.14	15.09	48.22	74.00	-25.78
15960.00	Average	31.05	15.09	46.14	54.00	-7.86
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2a

(4) MIMO:

Test Mode	IEEE 802.11n HT20 / 5260 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

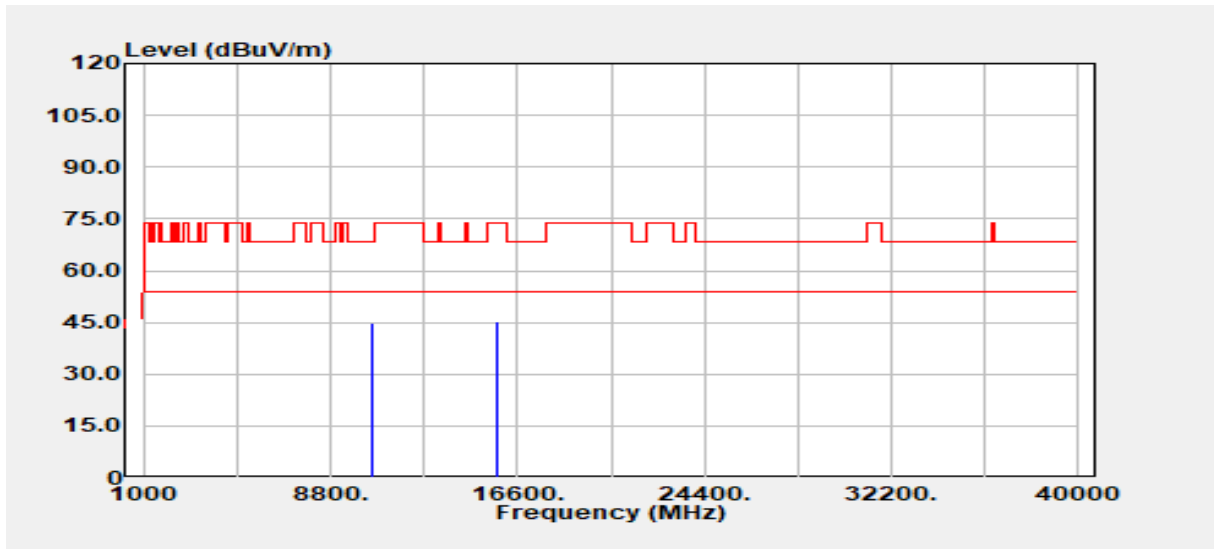


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	33.20	11.41	44.61	68.20	-23.59
15780.00	Peak	31.22	14.08	45.29	74.00	-28.71
15780.00	Average	21.44	14.08	35.52	54.00	-18.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5260 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

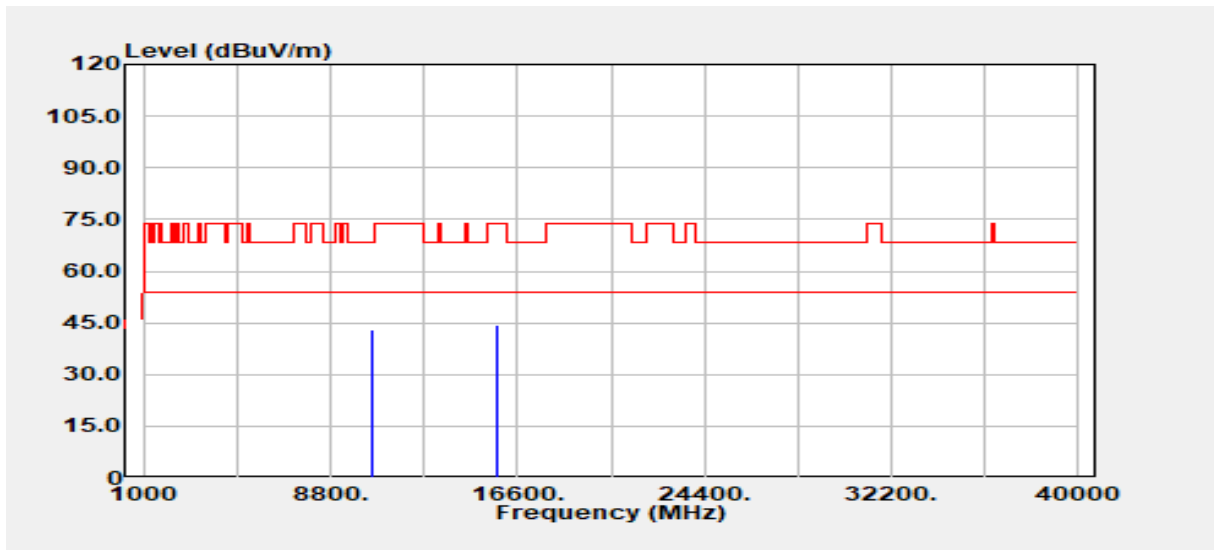


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	31.62	11.41	43.03	68.20	-25.17
15780.00	Peak	30.36	14.08	44.44	74.00	-29.56
15780.00	Average	22.35	14.08	36.43	54.00	-17.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5300 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

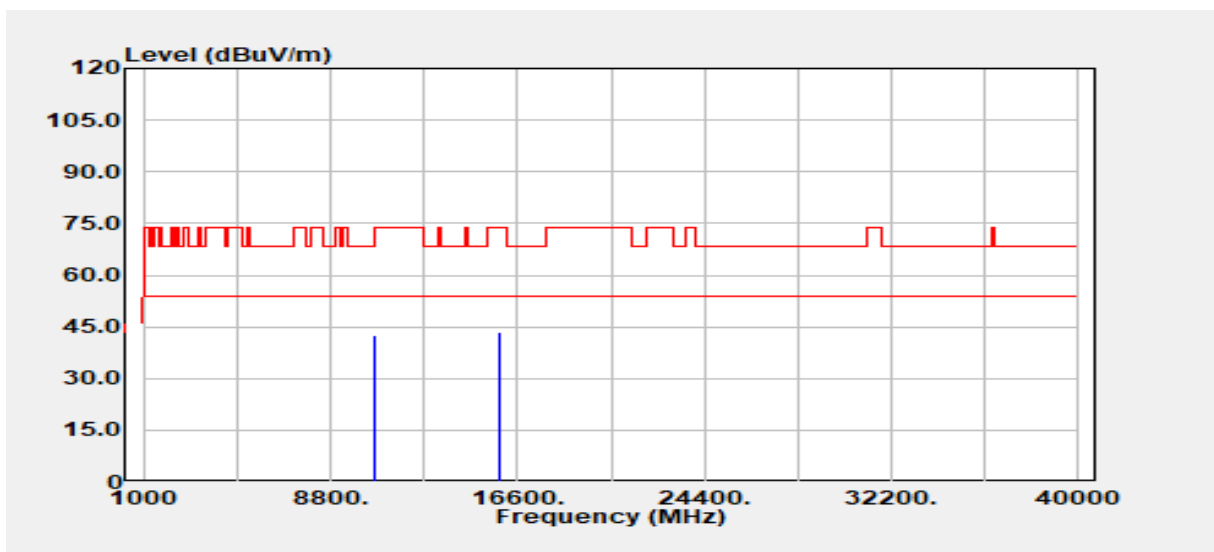


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	30.85	11.53	42.38	68.20	-25.82
15900.00	Peak	29.20	14.45	43.65	74.00	-30.35
15900.00	Average	21.85	14.45	36.30	54.00	-17.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5300 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

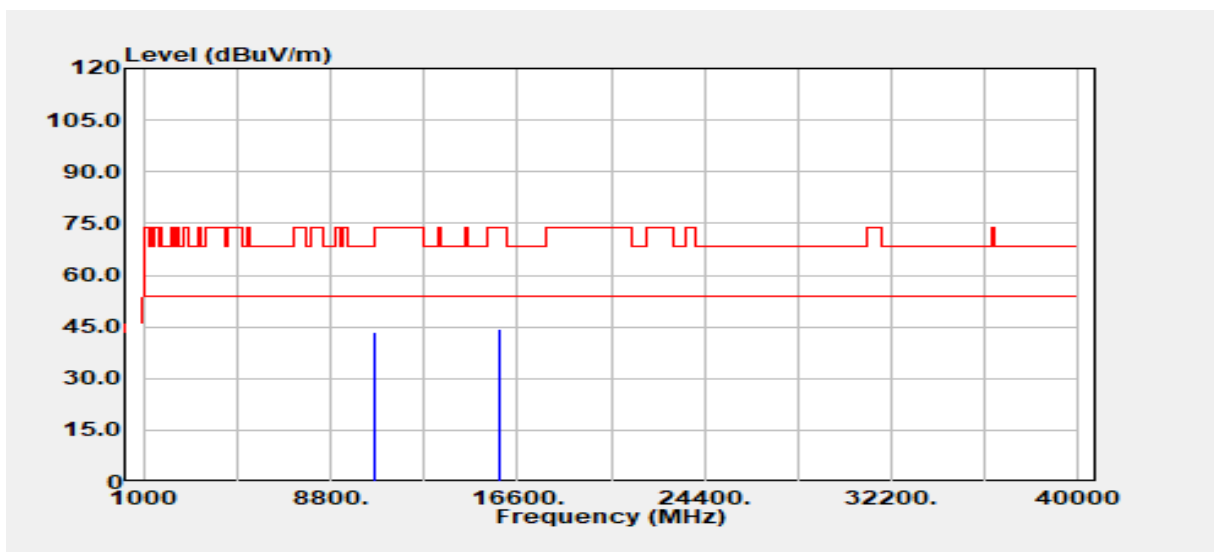


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10600.00	Peak	31.73	11.53	43.26	68.20	-24.94
15900.00	Peak	29.78	14.45	44.23	74.00	-29.77
15900.00	Average	21.80	14.45	36.25	54.00	-17.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

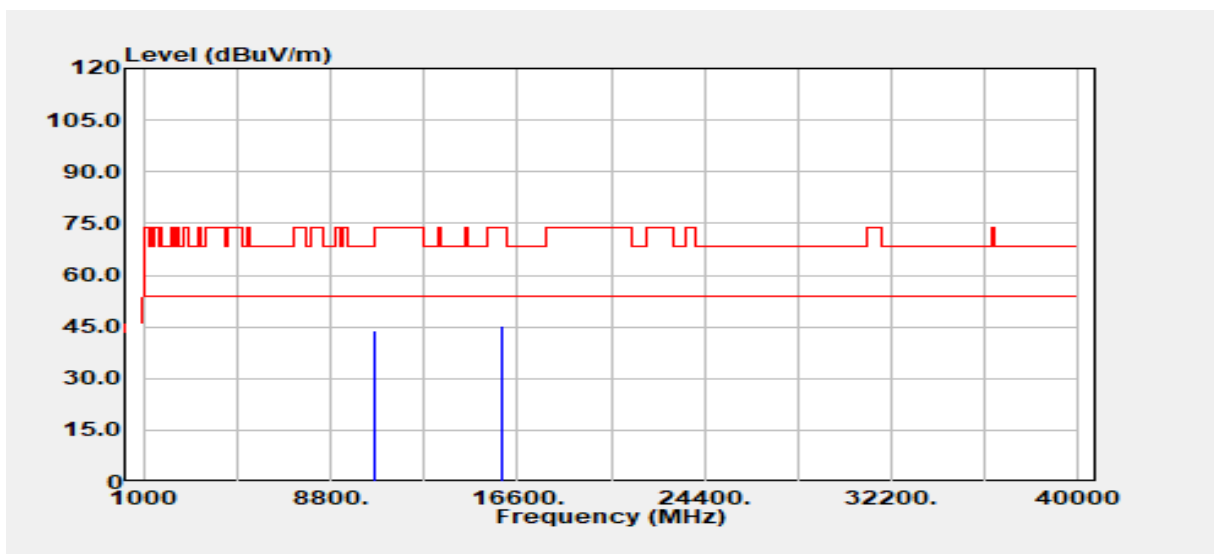


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	32.23	11.50	43.73	74.00	-30.27
10640.00	Average	23.68	11.50	35.18	54.00	-18.82
15960.00	Peak	30.19	15.09	45.27	74.00	-28.73
15960.00	Average	21.87	15.09	36.96	54.00	-17.04

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

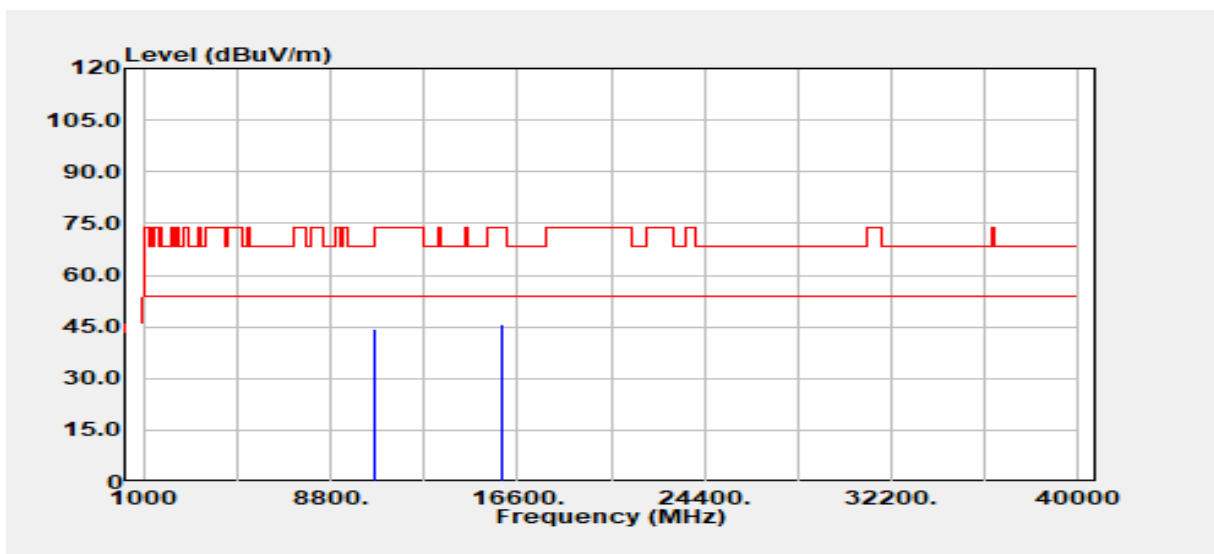


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10640.00	Peak	32.92	11.50	44.42	74.00	-29.58
10640.00	Average	24.67	11.50	36.17	54.00	-17.83
15960.00	Peak	30.79	15.09	45.88	74.00	-28.12
15960.00	Average	21.12	15.09	36.21	54.00	-17.79

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5270 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

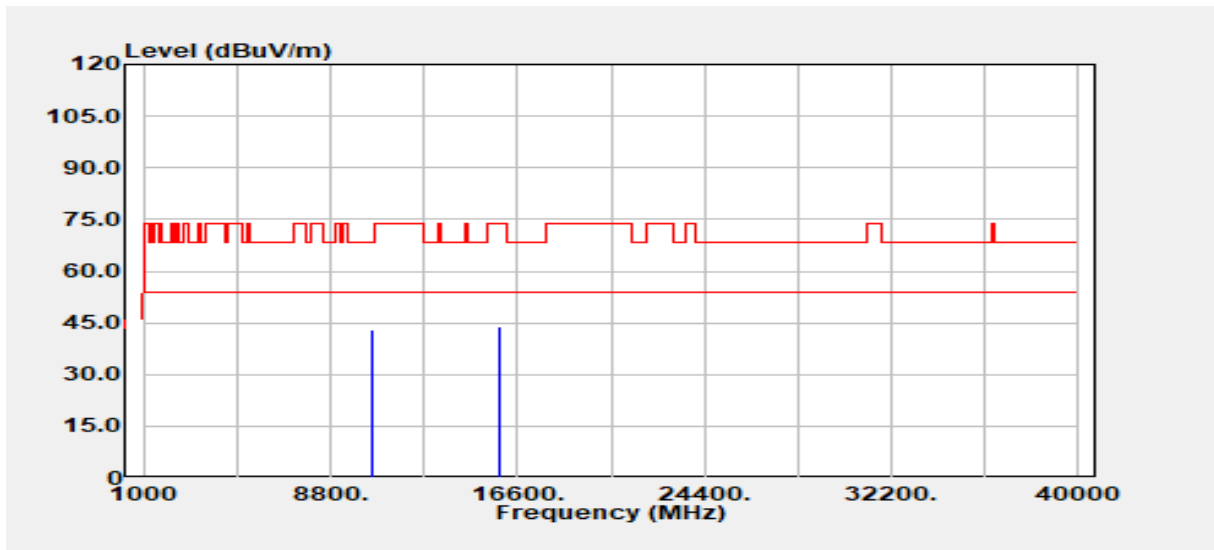


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	31.66	11.41	43.07	68.20	-25.13
15810.00	Peak	29.78	14.04	43.82	74.00	-30.18
15810.00	Average	23.05	14.04	37.09	54.00	-16.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5270 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

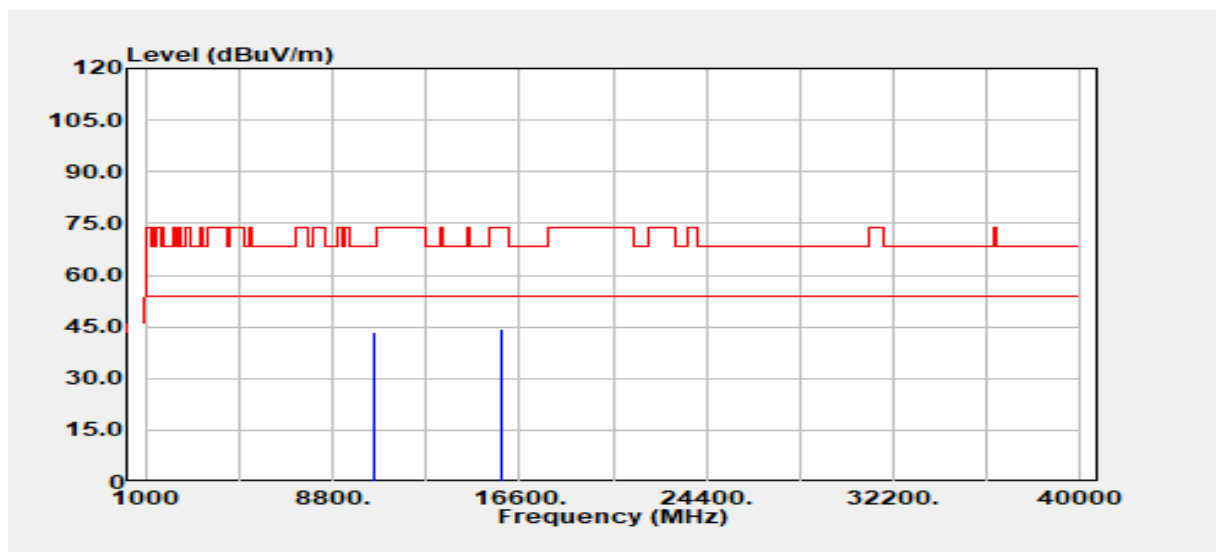


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	32.11	11.41	43.52	68.20	-24.68
15810.00	Peak	30.33	14.04	44.37	74.00	-29.63
15810.00	Average	24.84	14.04	38.88	54.00	-15.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

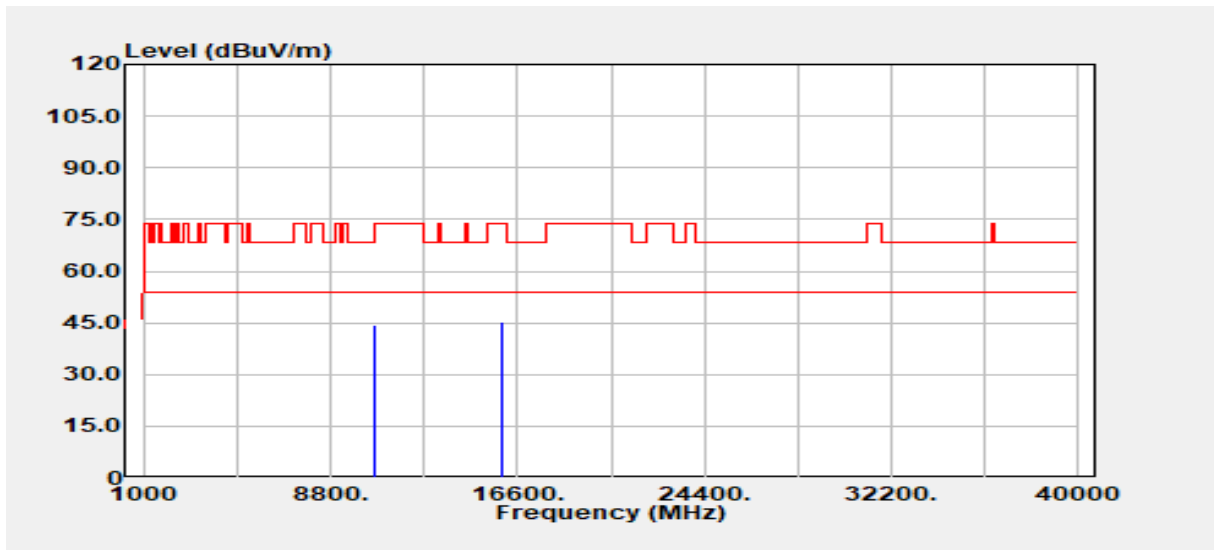


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10620.00	Peak	32.71	11.52	44.23	74.00	-29.77
10620.00	Average	24.06	11.52	35.58	54.00	-18.42
15930.00	Peak	30.46	14.81	45.28	74.00	-28.72
15930.00	Average	23.23	14.81	38.04	54.00	-15.96

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

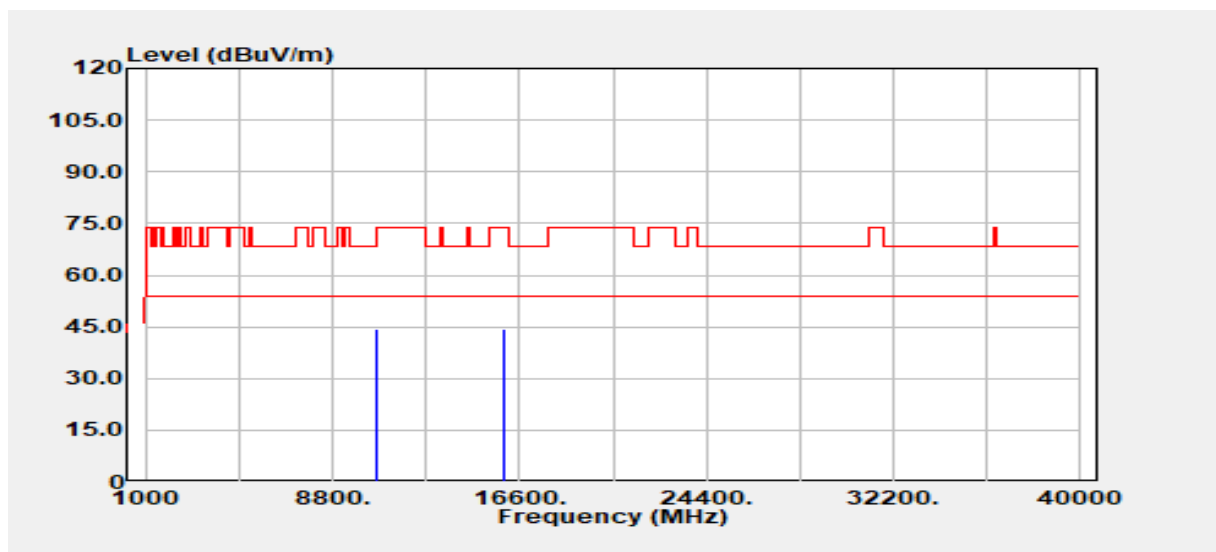


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	32.76	11.52	44.28	74.00	-29.72
10620.00	Average	24.82	11.52	36.34	54.00	-17.66
15930.00	Peak	29.79	14.81	44.60	74.00	-29.40
15930.00	Average	23.48	14.81	38.29	54.00	-15.71

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

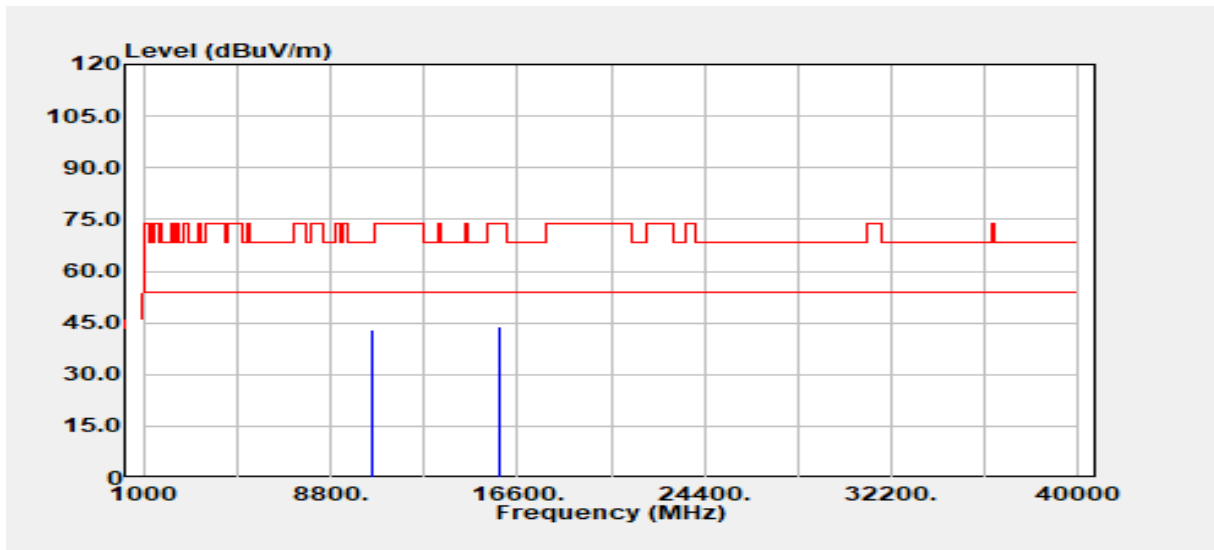


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	31.60	11.48	43.08	68.20	-25.12
15870.00	Peak	29.53	14.34	43.87	74.00	-30.13
15870.00	Average	23.78	14.34	38.12	54.00	-15.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

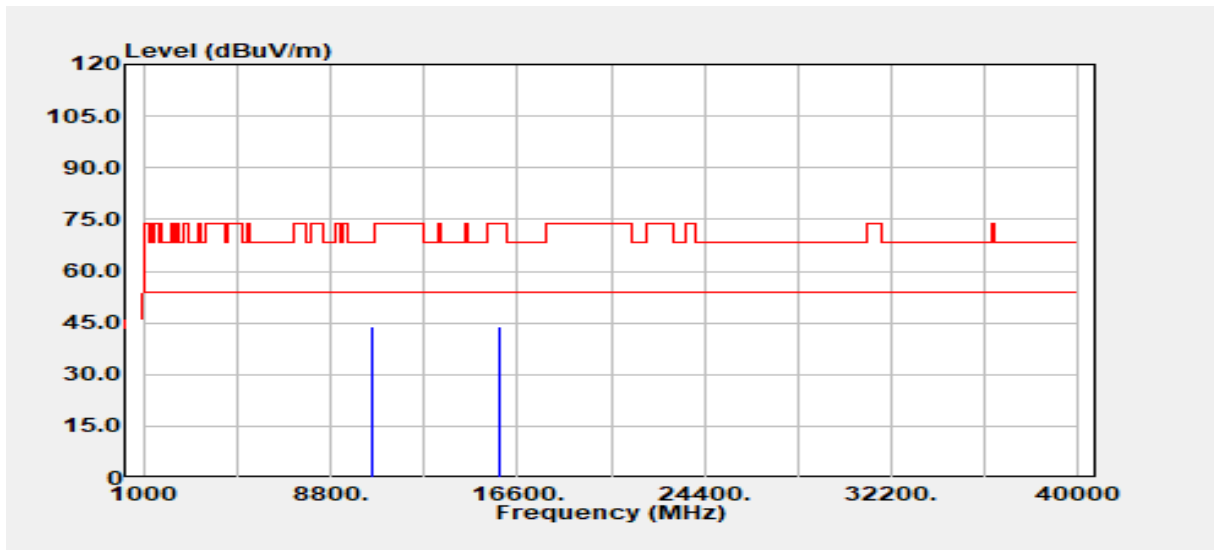


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	32.54	11.48	44.02	68.20	-24.18
15870.00	Peak	29.68	14.34	44.02	74.00	-29.98
15870.00	Average	23.89	14.34	38.24	54.00	-15.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

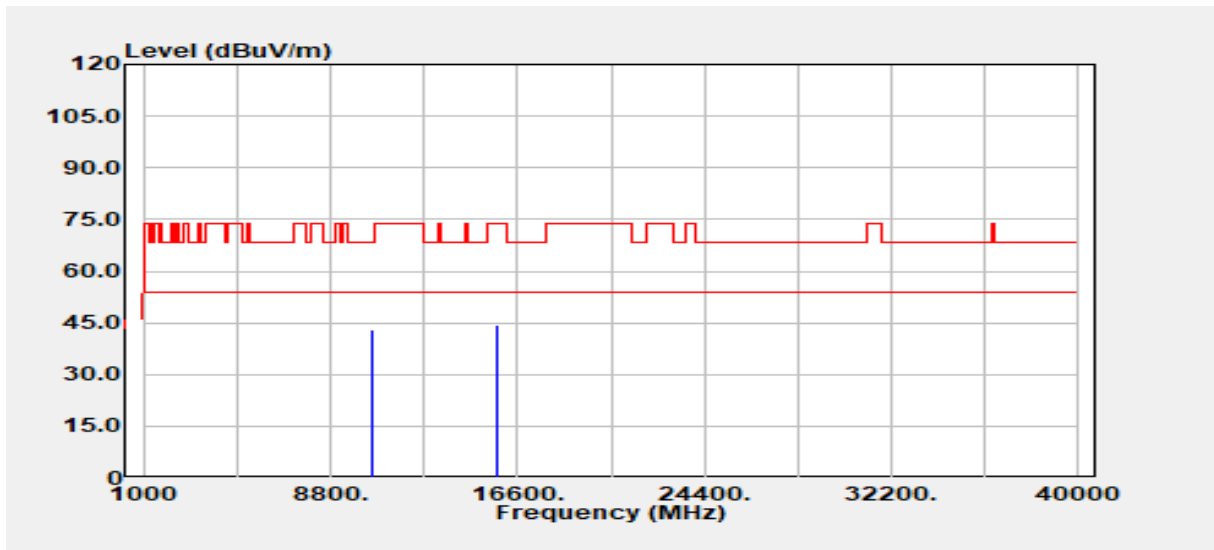


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10500.00	Peak	31.64	11.41	43.05	68.20	-25.15
15750.00	Peak	30.23	14.22	44.45	74.00	-29.55
15750.00	Average	23.44	14.22	37.66	54.00	-16.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

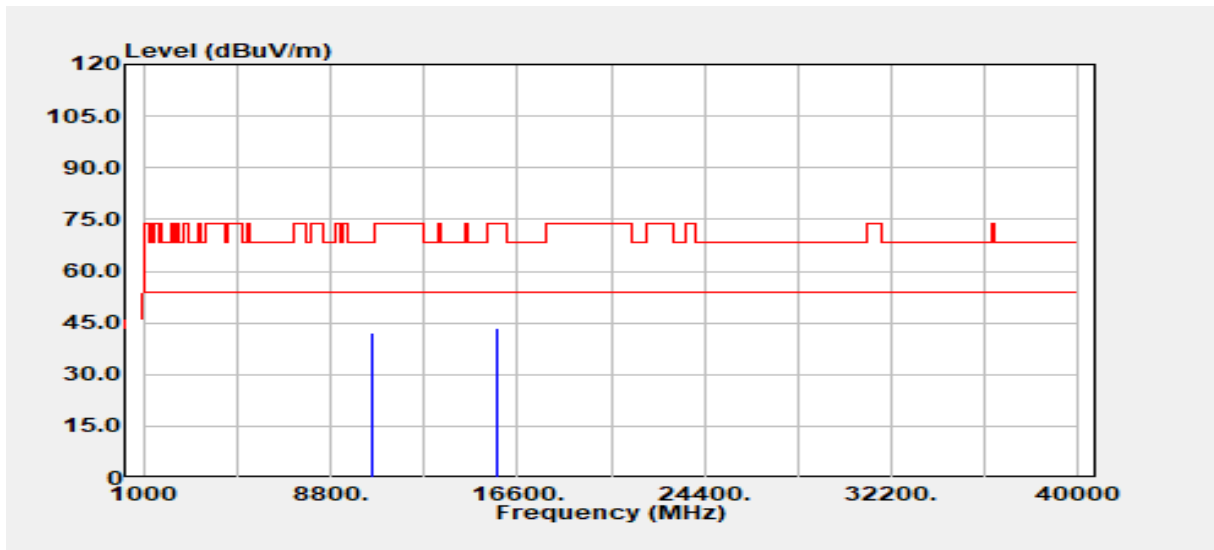


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10500.00	Peak	30.80	11.41	42.21	68.20	-25.99
15750.00	Peak	29.25	14.22	43.47	74.00	-30.53
15750.00	Average	23.35	14.22	37.57	54.00	-16.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

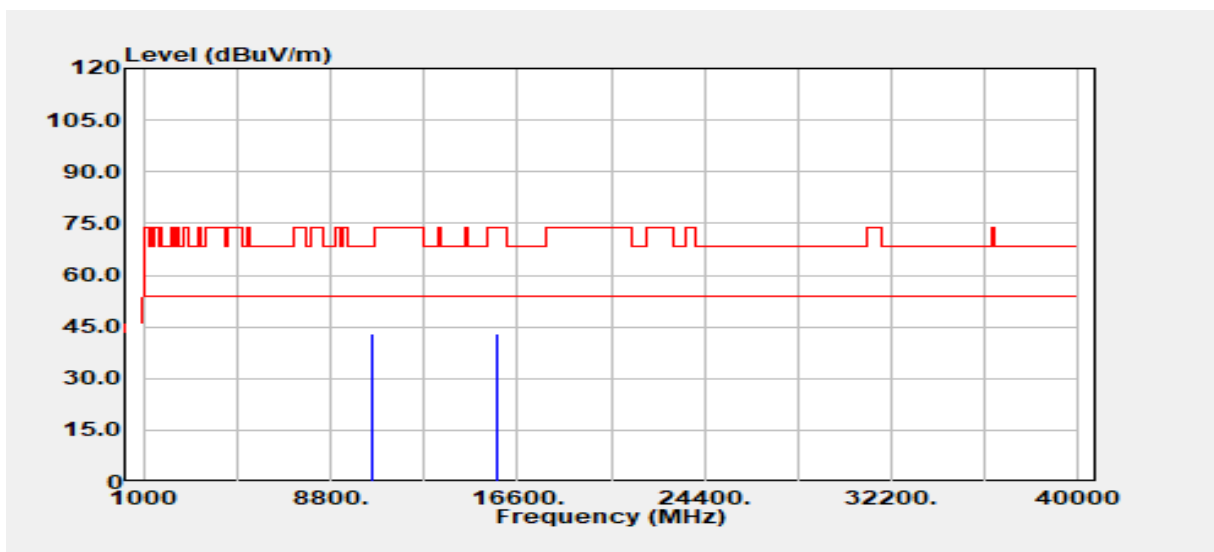


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	31.69	11.41	43.10	68.20	-25.10
15780.00	Peak	29.09	14.08	43.17	74.00	-30.83
15780.00	Average	24.07	14.08	38.14	54.00	-15.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

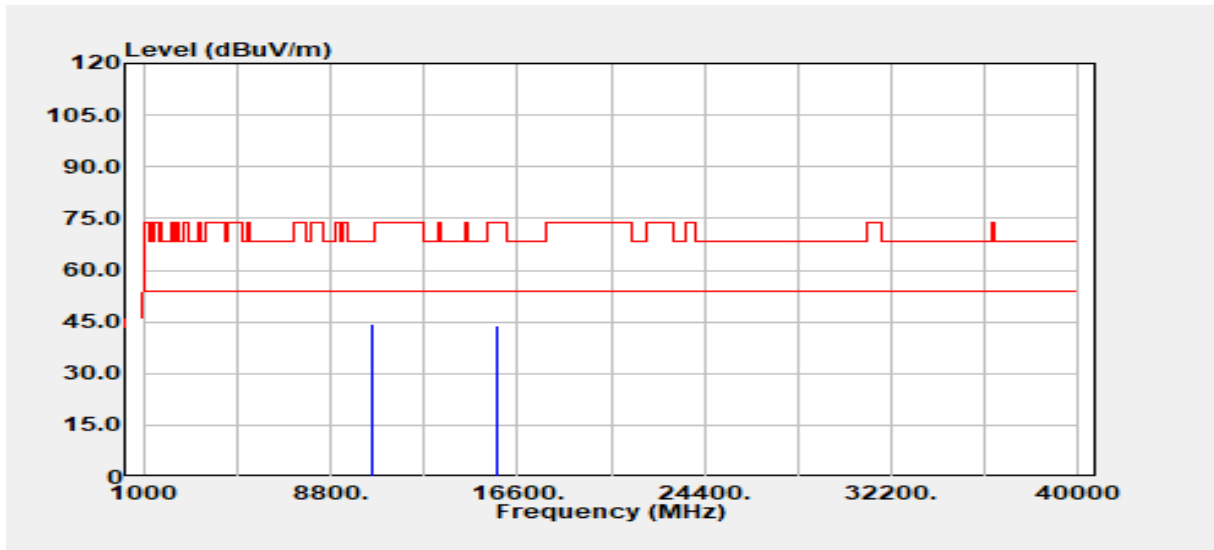


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	32.80	11.41	44.21	68.20	-23.99
15780.00	Peak	29.94	14.08	44.02	74.00	-29.98
15780.00	Average	24.12	14.08	38.20	54.00	-15.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

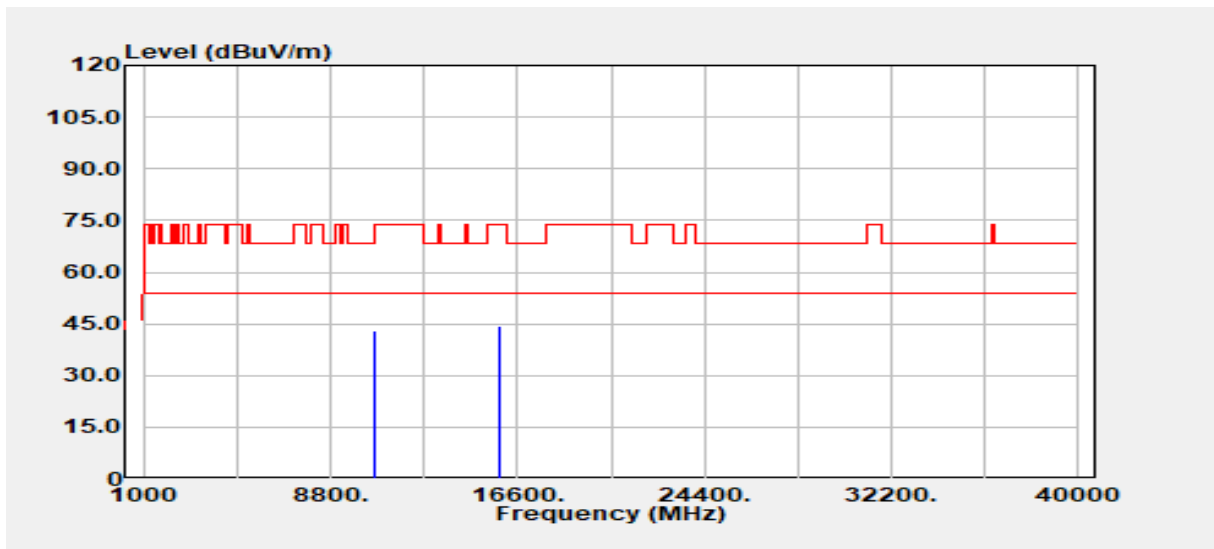


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10600.00	Peak	31.52	11.53	43.05	68.20	-25.15
15900.00	Peak	29.99	14.45	44.44	74.00	-29.56
15900.00	Average	24.62	14.45	39.07	54.00	-14.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

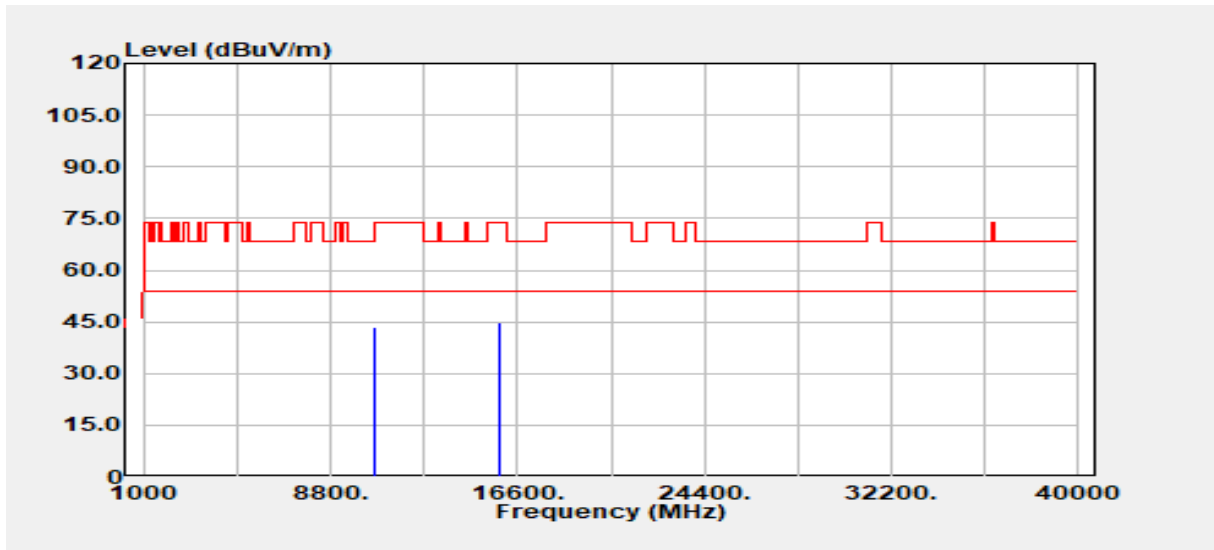


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
10600.00	Peak	31.85	11.53	43.38	68.20	-24.82
15900.00	Peak	30.49	14.45	44.94	74.00	-29.06
15900.00	Average	24.64	14.45	39.09	54.00	-14.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

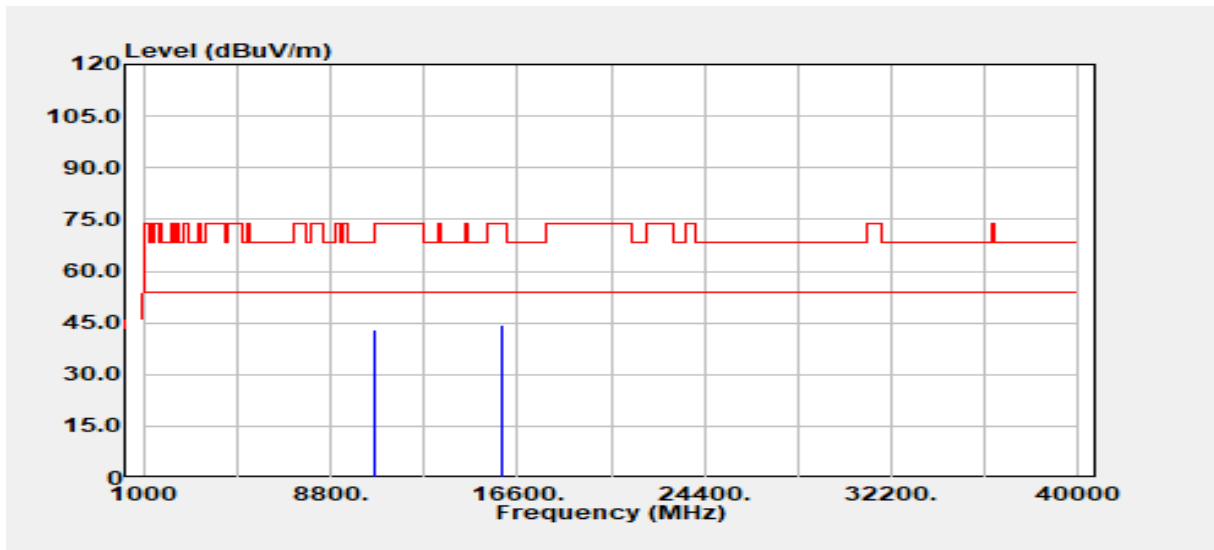


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	31.47	11.50	42.97	74.00	-31.03
10640.00	Average	25.34	11.50	36.84	54.00	-17.16
15960.00	Peak	29.14	15.09	44.23	74.00	-29.77
15960.00	Average	24.31	15.09	39.40	54.00	-14.60

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

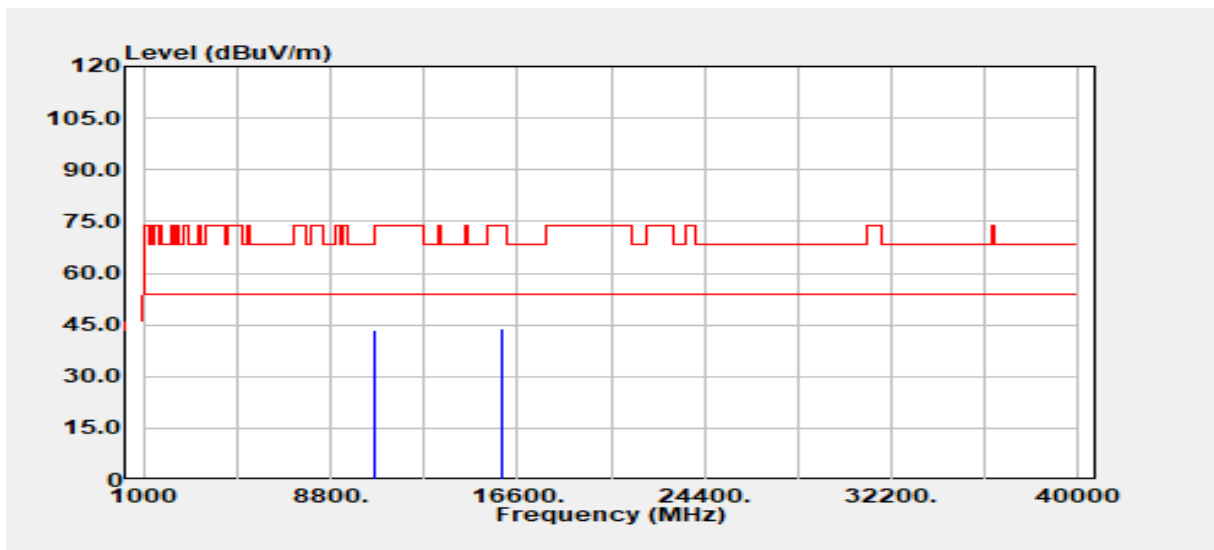


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10640.00	Peak	32.17	11.50	43.68	74.00	-30.32
10640.00	Average	25.30	11.50	36.81	54.00	-17.19
15960.00	Peak	28.99	15.09	44.08	74.00	-29.92
15960.00	Average	24.56	15.09	39.65	54.00	-14.35

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

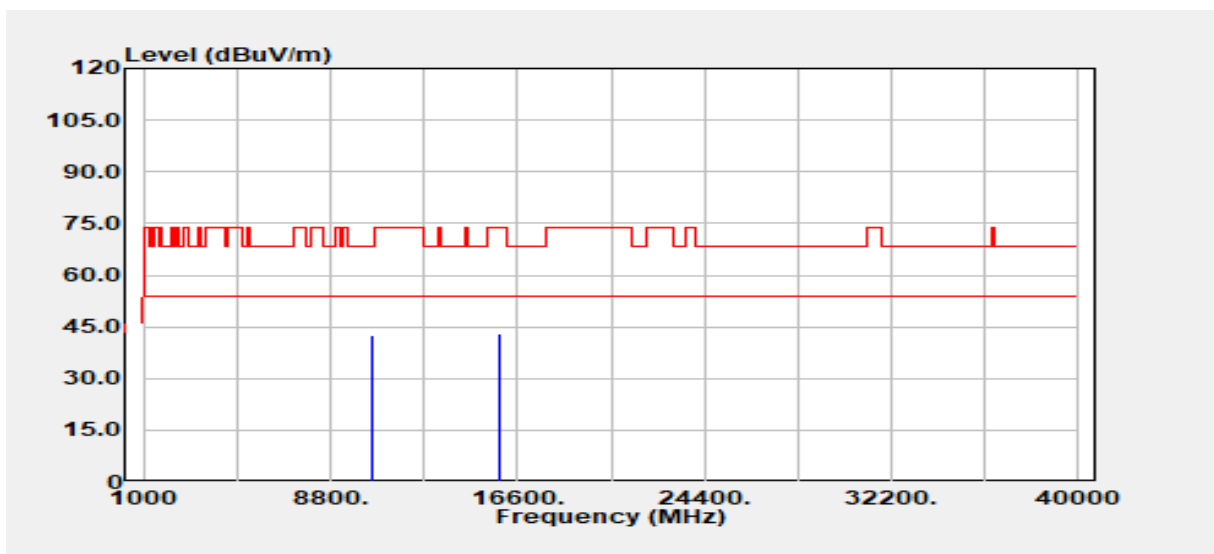


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	31.06	11.41	42.47	68.20	-25.73
15810.00	Peak	28.77	14.04	42.81	74.00	-31.19
15810.00	Average	22.03	14.04	36.07	54.00	-17.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

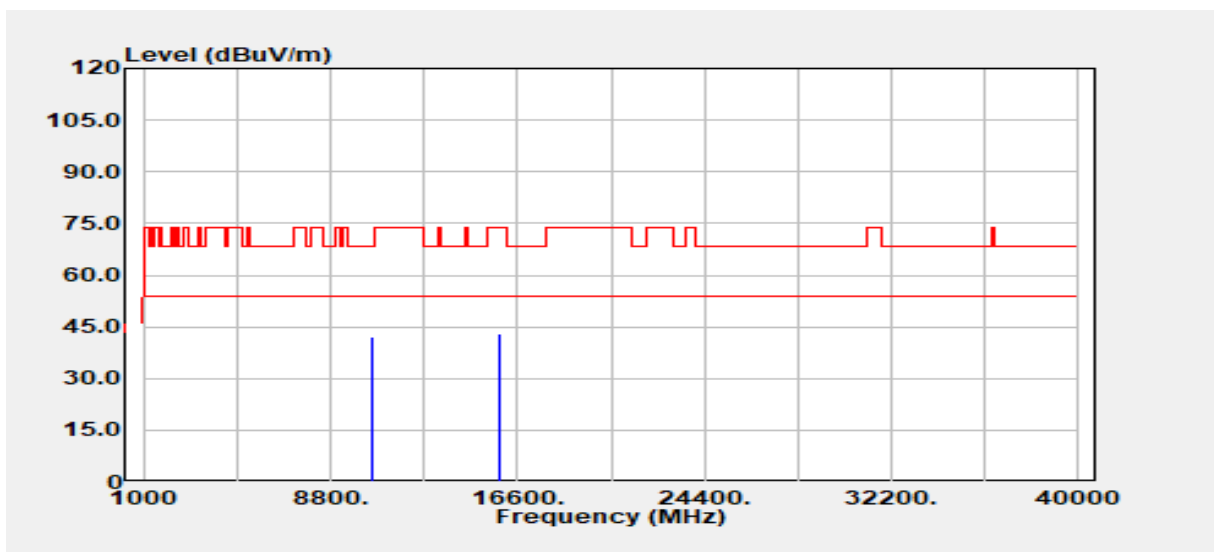


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	30.75	11.41	42.16	68.20	-26.04
15810.00	Peak	29.04	14.04	43.08	74.00	-30.92
15810.00	Average	22.90	14.04	36.94	54.00	-17.06
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

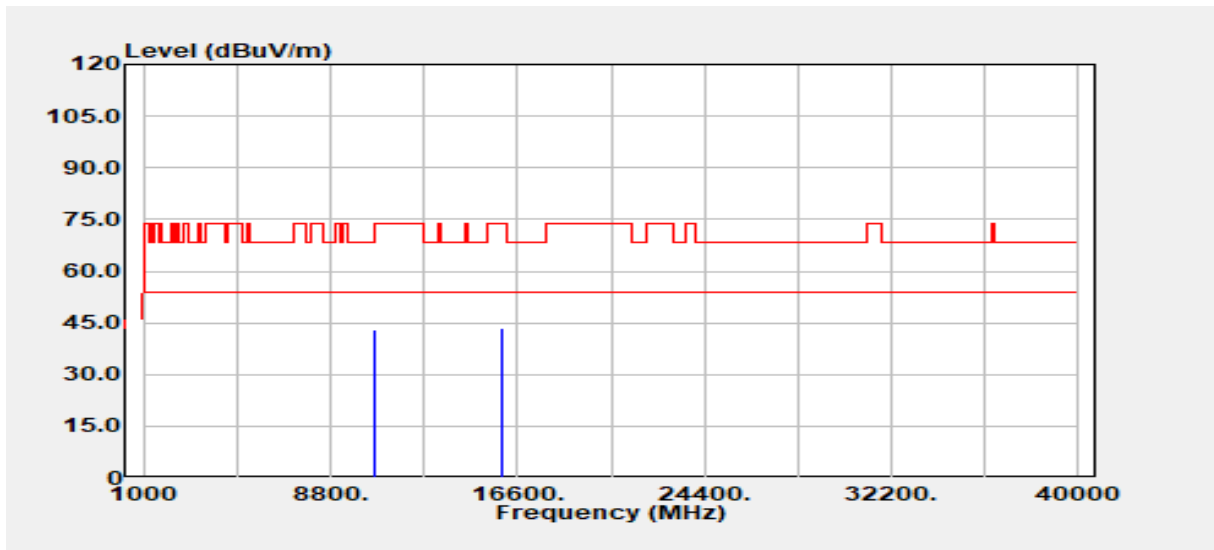


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10620.00	Peak	31.42	11.52	42.93	74.00	-31.07
10620.00	Average	23.36	11.52	34.88	54.00	-19.12
15930.00	Peak	28.47	14.81	43.28	74.00	-30.72
15930.00	Average	22.34	14.81	37.16	54.00	-16.84

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

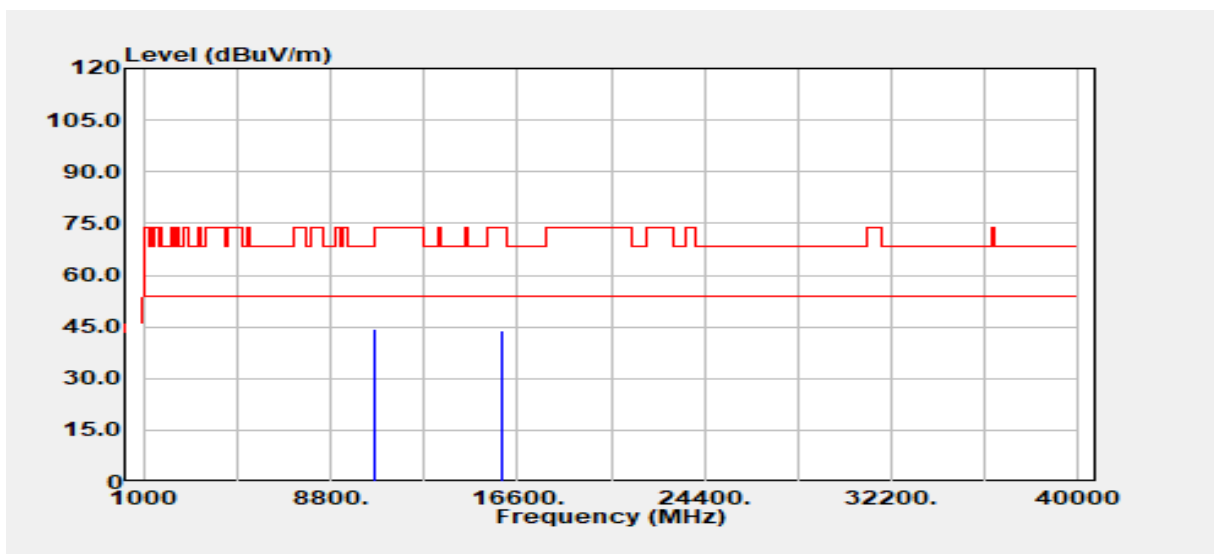


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	32.66	11.52	44.17	74.00	-29.83
10620.00	Average	24.75	11.52	36.26	54.00	-17.74
15930.00	Peak	28.96	14.81	43.77	74.00	-30.23
15930.00	Average	22.32	14.81	37.13	54.00	-16.87

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

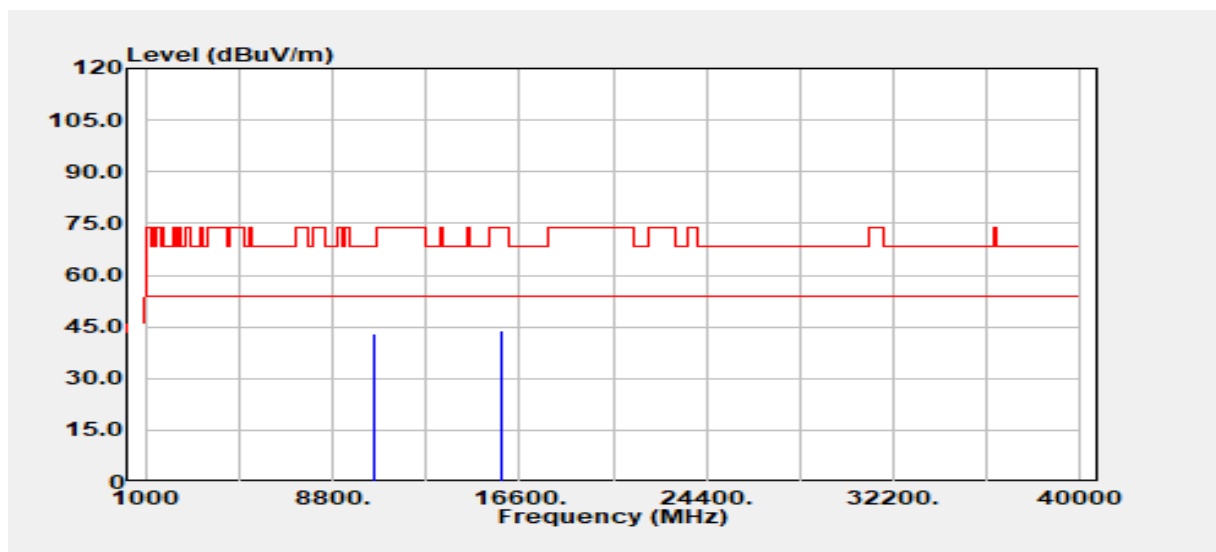


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	31.49	11.48	42.97	68.20	-25.23
15870.00	Peak	29.55	14.34	43.89	74.00	-30.11
15870.00	Average	22.98	14.34	37.32	54.00	-16.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

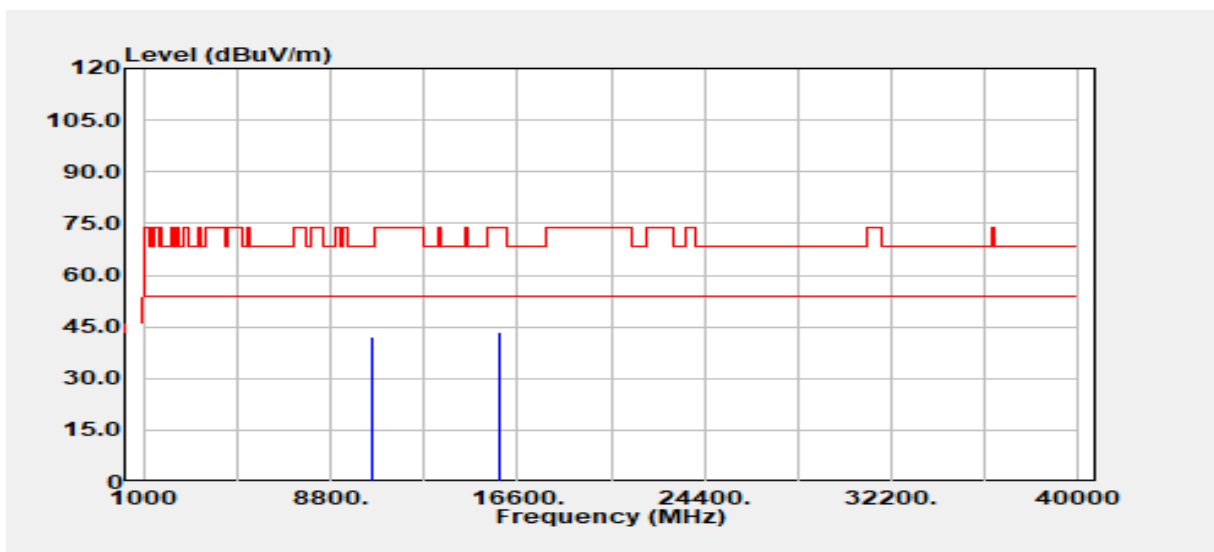


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	30.75	11.48	42.23	68.20	-25.97
15870.00	Peak	28.98	14.34	43.32	74.00	-30.68
15870.00	Average	23.07	14.34	37.42	54.00	-16.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

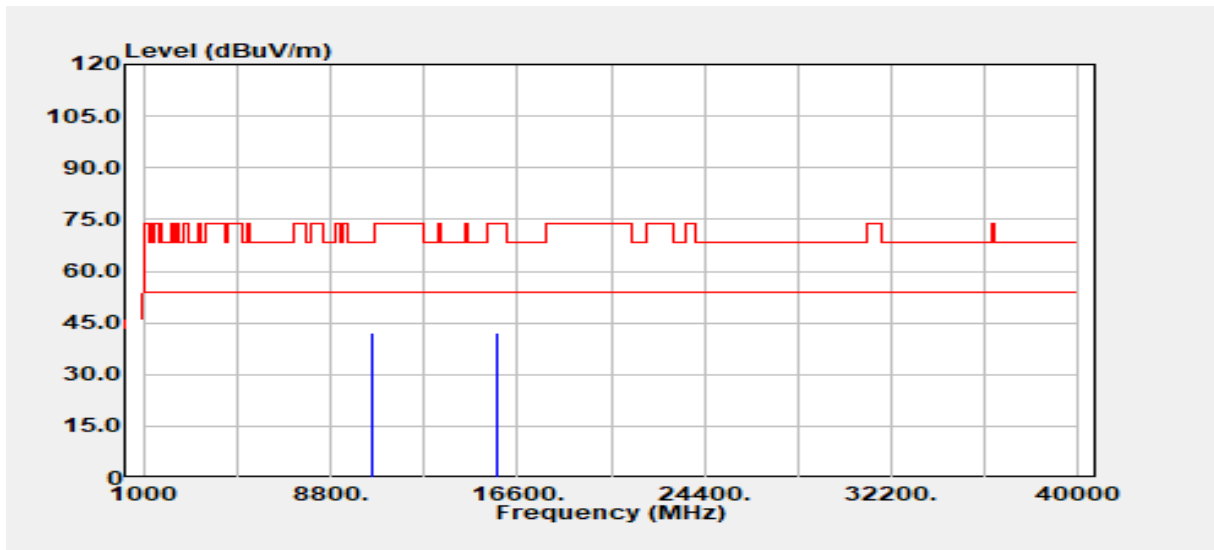


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10500.00	Peak	30.50	11.41	41.91	68.20	-26.29
15750.00	Peak	27.72	14.22	41.94	74.00	-32.06
15750.00	Average	22.66	14.22	36.88	54.00	-17.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

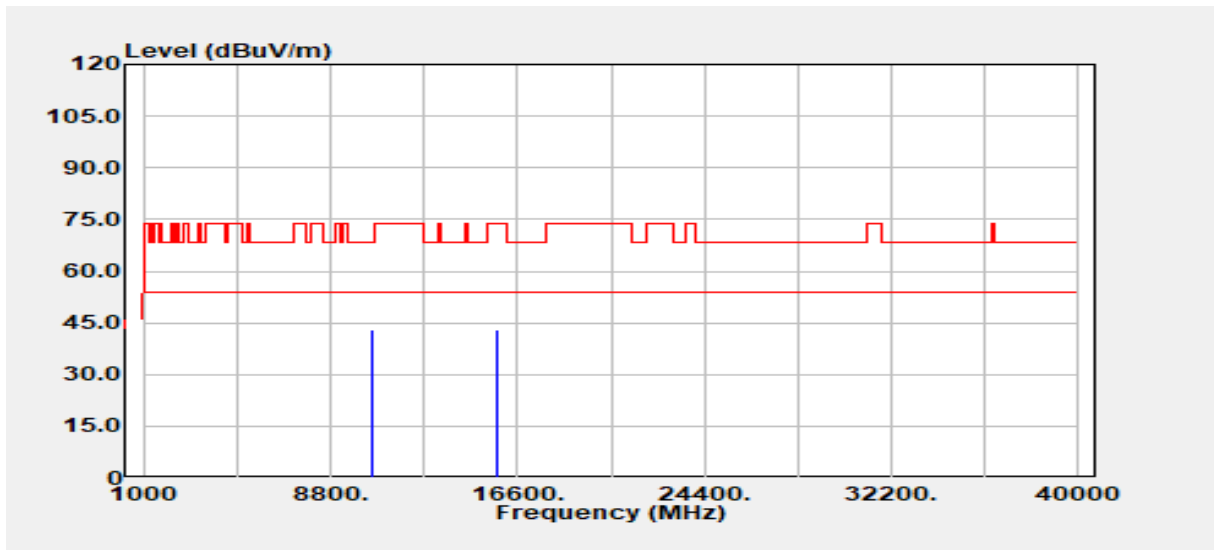

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10500.00	Peak	31.56	11.41	42.97	68.20	-25.23
15750.00	Peak	28.82	14.22	43.04	74.00	-30.96
15750.00	Average	22.39	14.22	36.61	54.00	-17.39
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

(1) Chain 0:

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

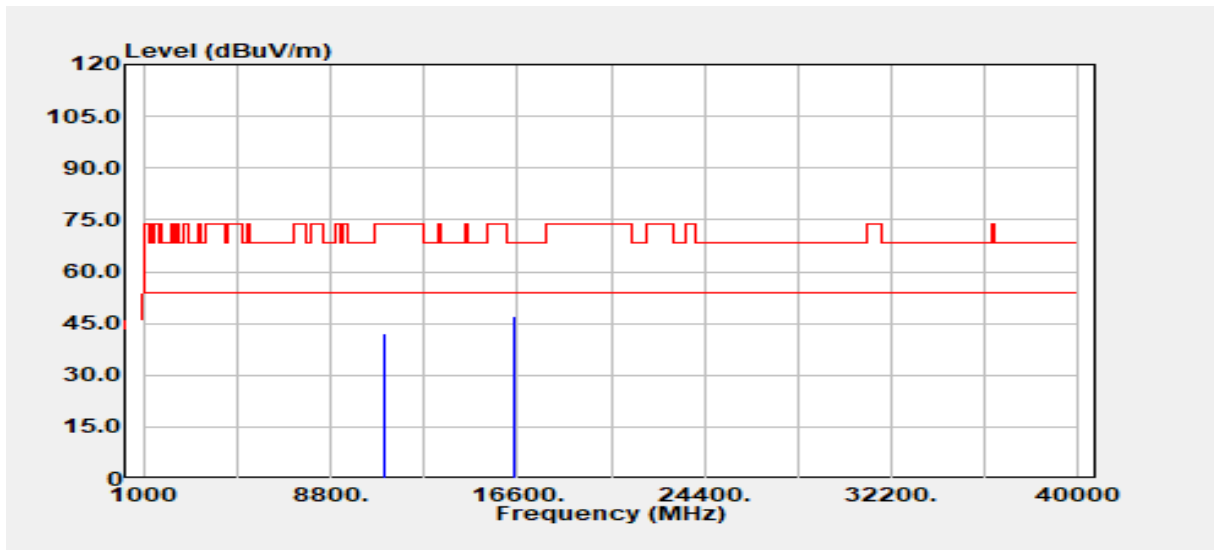


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	29.71	12.42	42.13	74.00	-31.87
11000.00	Average	25.12	12.42	37.54	54.00	-16.46
16500.00	Peak	28.43	18.70	47.13	68.20	-21.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

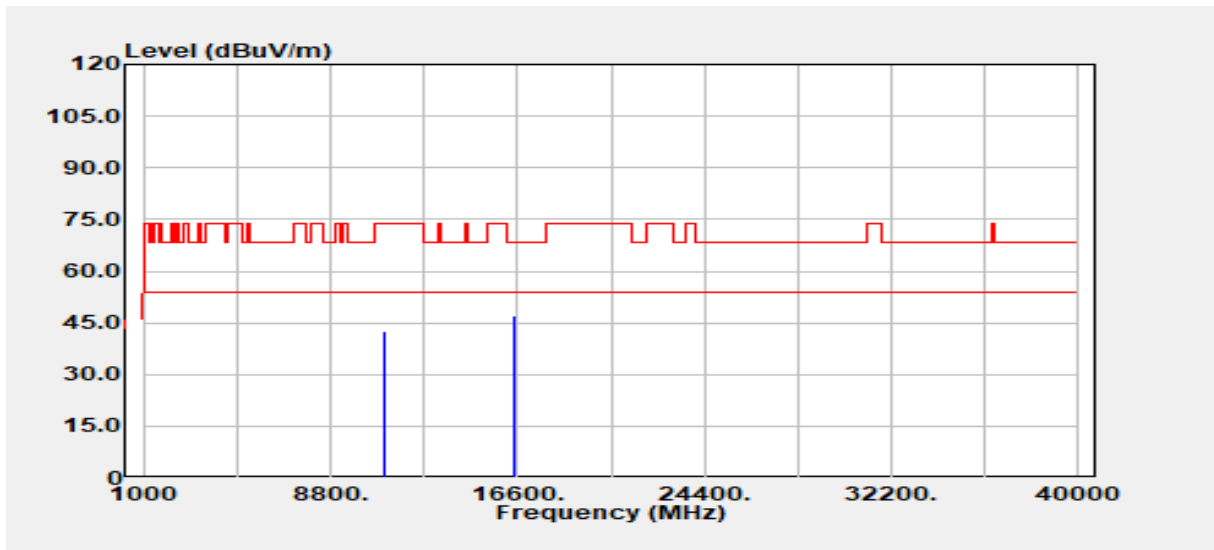


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	30.25	12.42	42.67	74.00	-31.33
11000.00	Average	26.26	12.42	38.68	54.00	-15.32
16500.00	Peak	28.33	18.70	47.03	68.20	-21.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

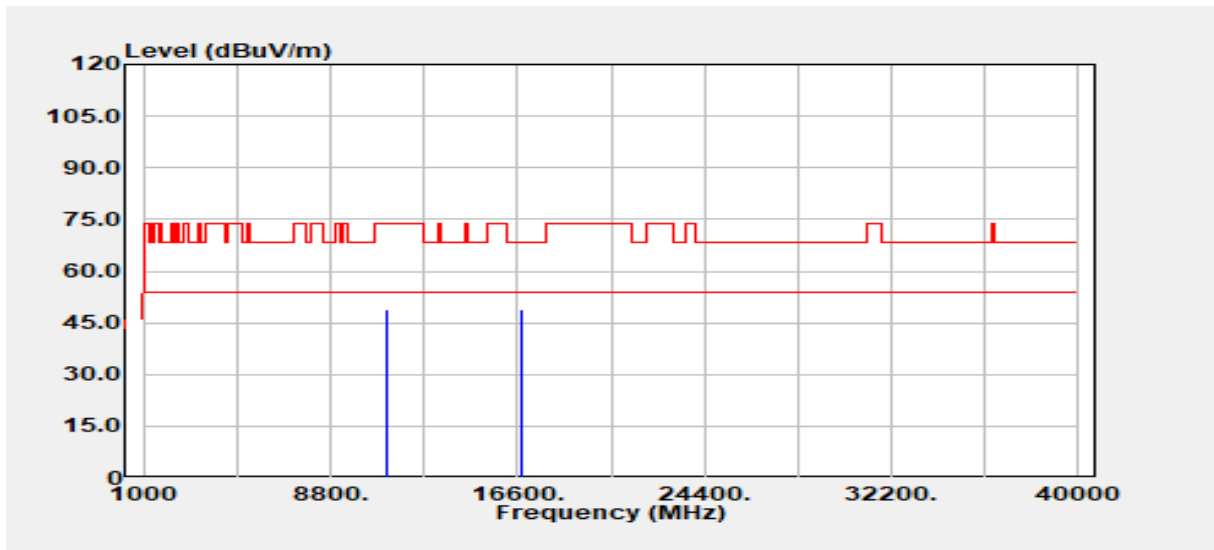


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	36.60	12.48	49.07	74.00	-24.93
11160.00	Average	31.74	12.48	44.21	54.00	-9.79
16740.00	Peak	28.12	20.88	49.00	68.20	-19.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

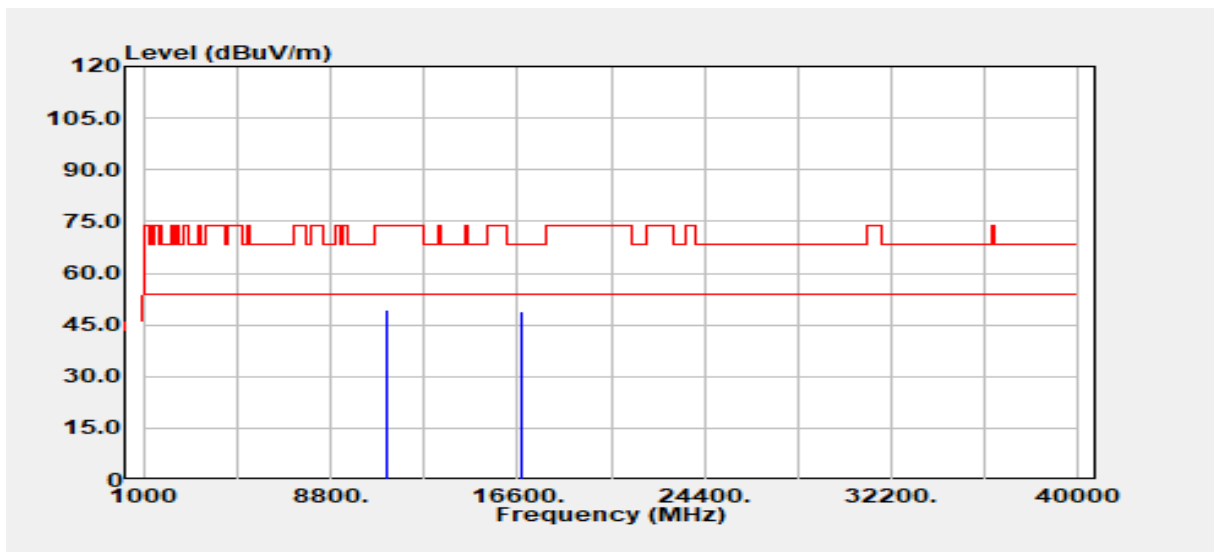


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	36.93	12.48	49.40	74.00	-24.60
11160.00	Average	31.96	12.48	44.44	54.00	-9.56
16740.00	Peak	27.84	20.88	48.71	68.20	-19.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

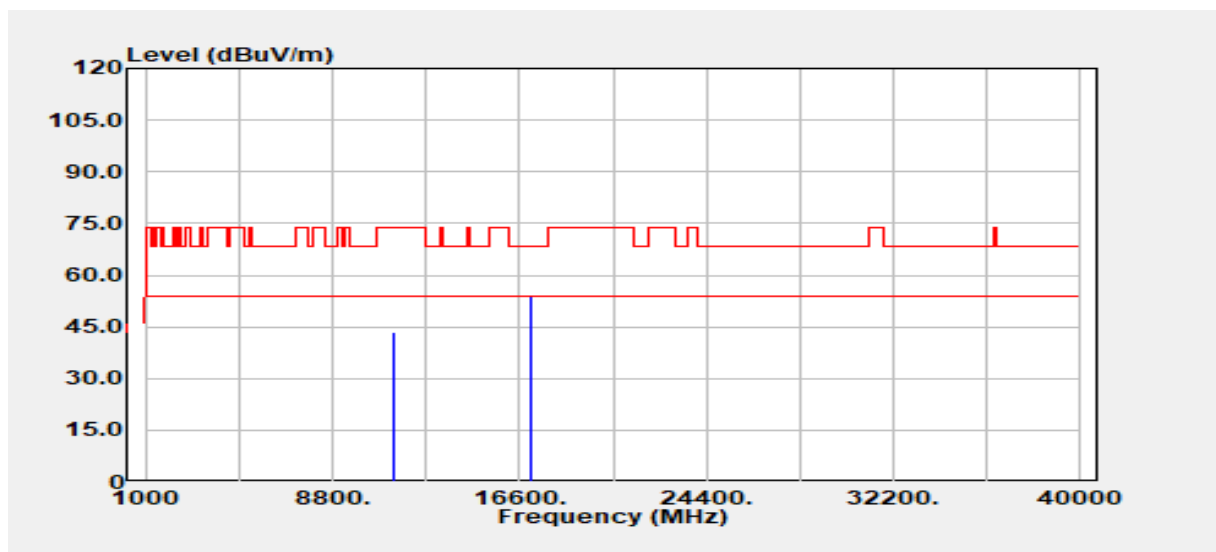


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	31.03	12.39	43.42	74.00	-30.58
11400.00	Average	25.63	12.39	38.02	54.00	-15.99
17100.00	Peak	28.49	25.62	54.11	68.20	-14.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

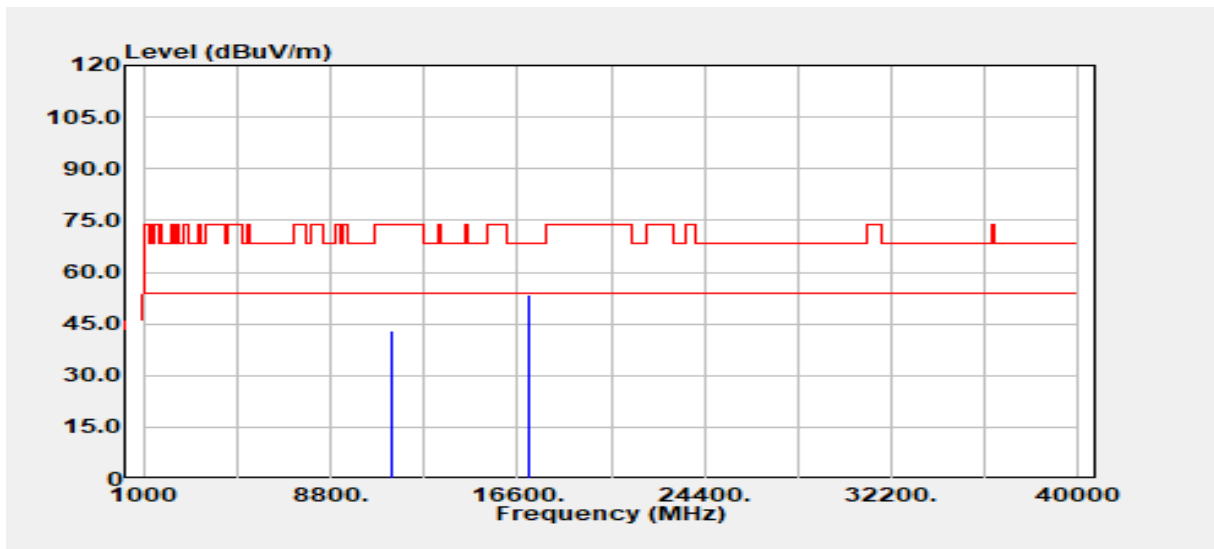

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	30.68	12.39	43.07	74.00	-30.93
11400.00	Average	25.37	12.39	37.76	54.00	-16.24
17100.00	Peak	27.70	25.62	53.32	68.20	-14.88
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

(2) Chain 1:

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

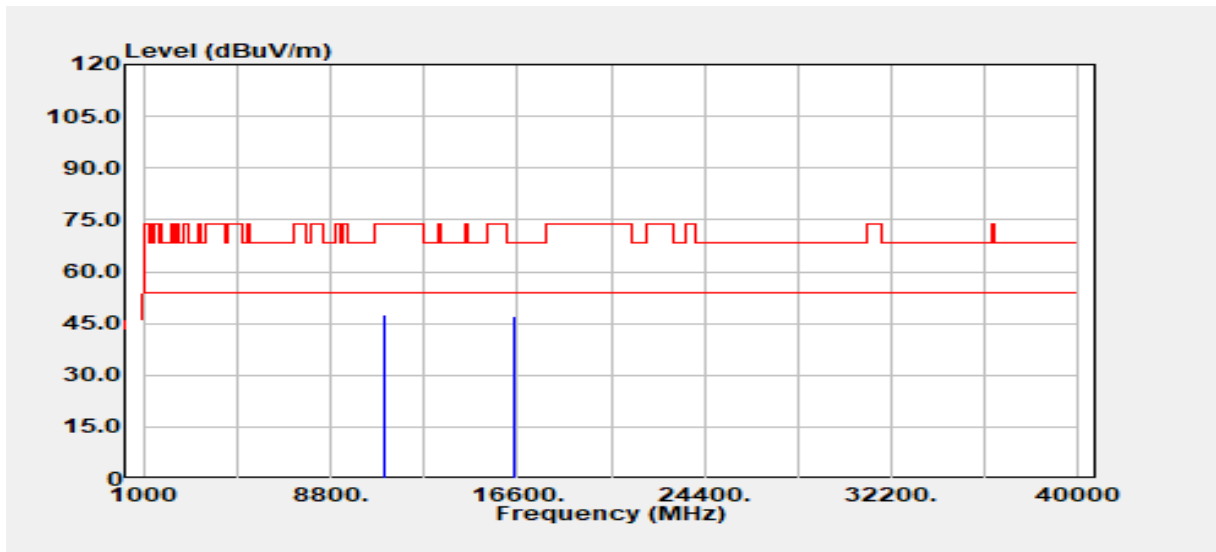


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	35.35	12.42	47.77	74.00	-26.23
11000.00	Average	28.93	12.42	41.35	54.00	-12.65
16500.00	Peak	28.23	18.70	46.93	68.20	-21.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

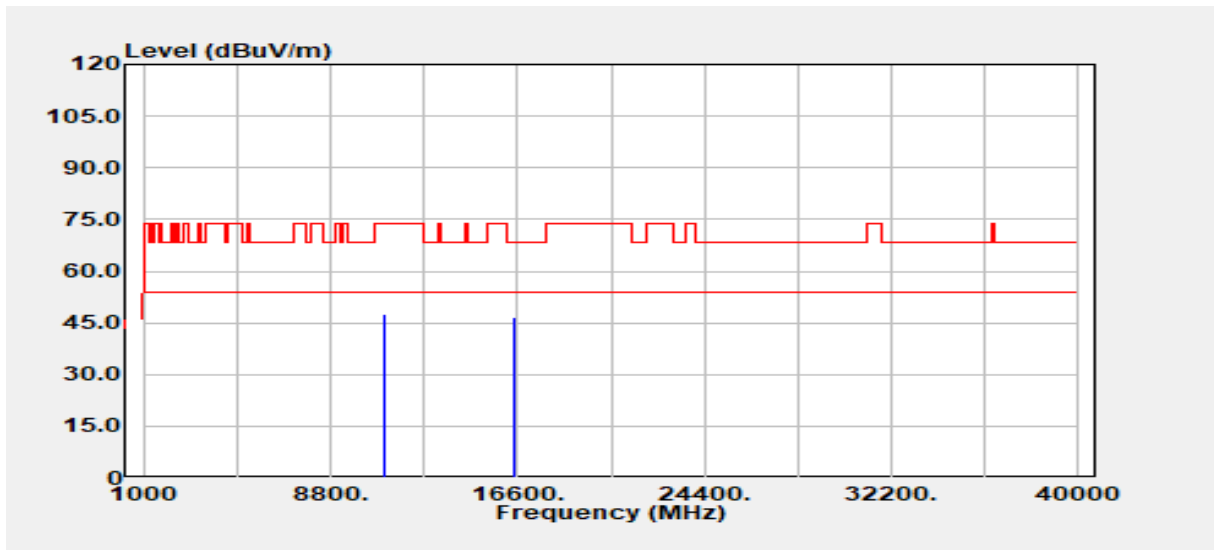


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	35.23	12.42	47.65	74.00	-26.35
11000.00	Average	31.72	12.42	44.14	54.00	-9.86
16500.00	Peak	28.16	18.70	46.86	68.20	-21.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

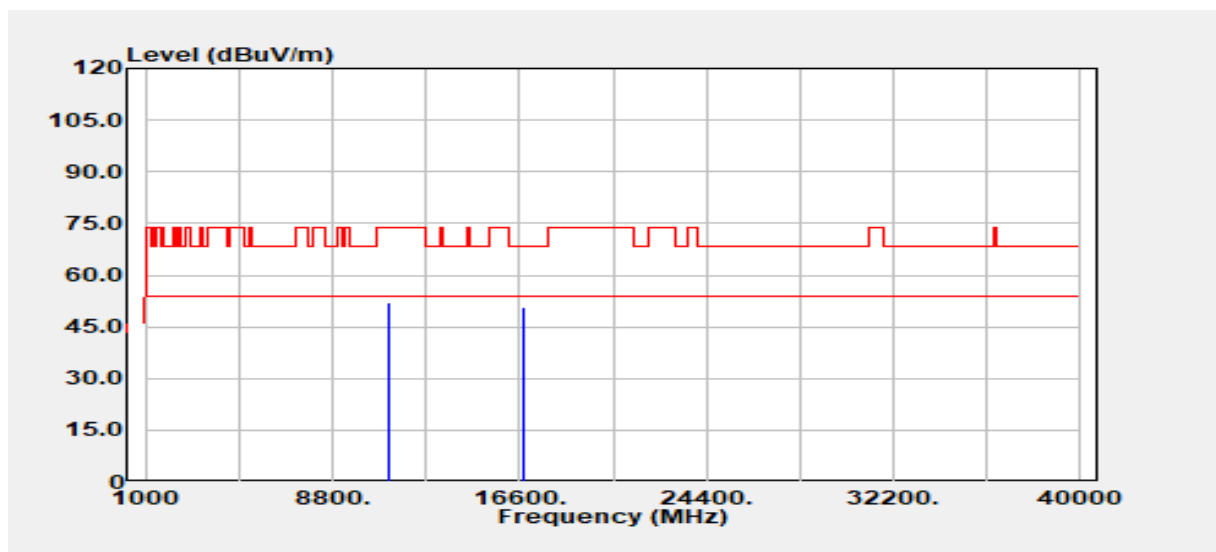


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	39.55	12.48	52.02	74.00	-21.98
11160.00	Average	33.92	12.48	46.40	54.00	-7.60
16740.00	Peak	29.77	20.88	50.64	68.20	-17.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

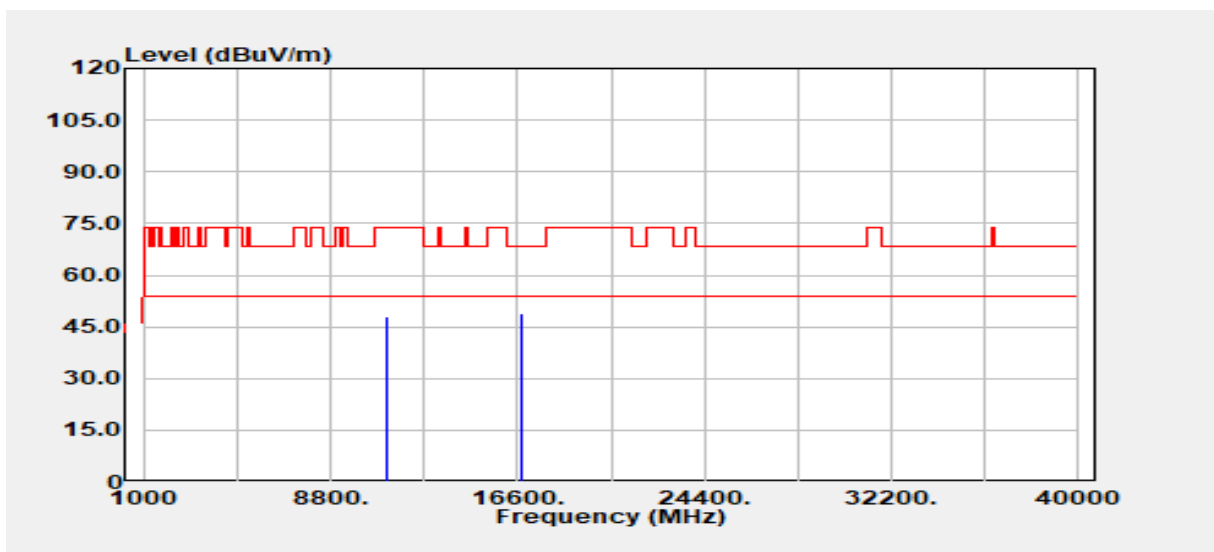


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	35.50	12.48	47.98	74.00	-26.02
11160.00	Average	32.33	12.48	44.81	54.00	-9.19
16740.00	Peak	28.04	20.88	48.91	68.20	-19.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

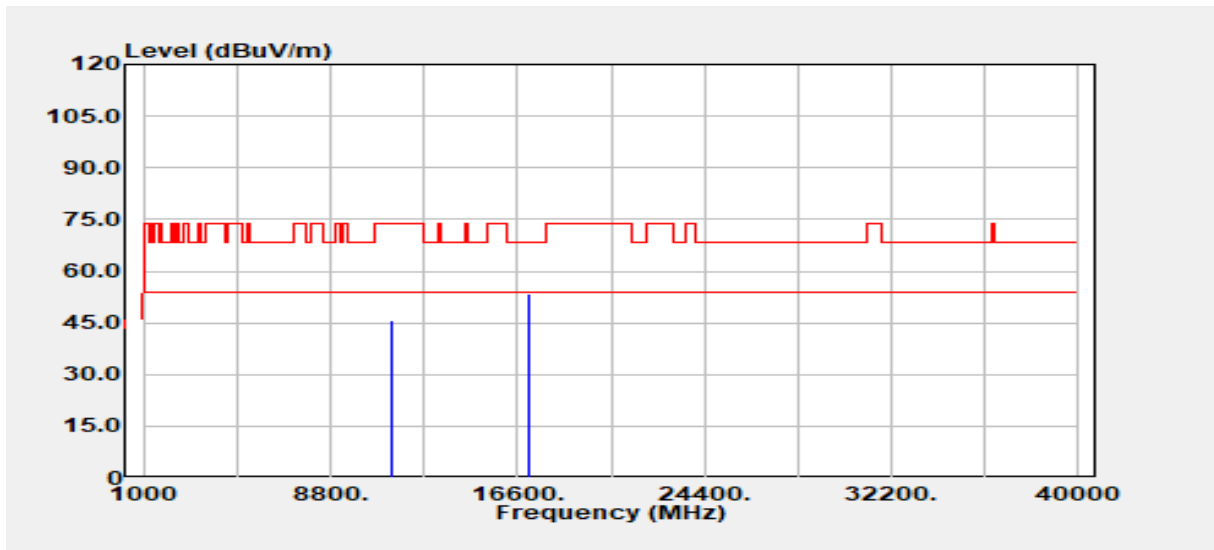


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	33.27	12.39	45.66	74.00	-28.34
11400.00	Average	30.21	12.39	42.60	54.00	-11.40
17100.00	Peak	27.66	25.62	53.28	68.20	-14.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

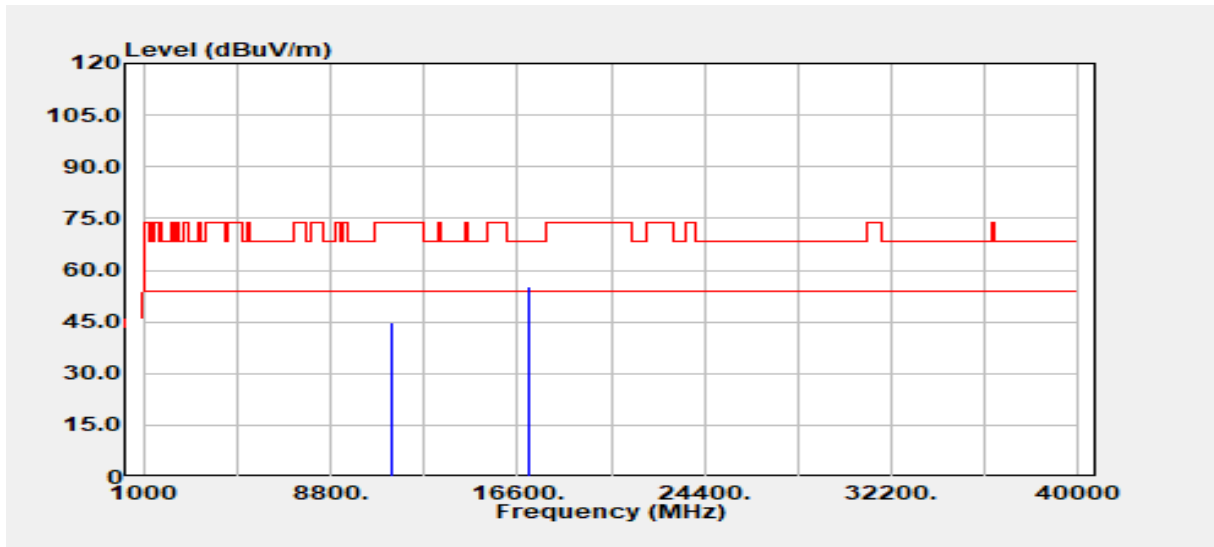

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	32.25	12.39	44.64	74.00	-29.36
11400.00	Average	28.89	12.39	41.28	54.00	-12.72
17100.00	Peak	29.79	25.62	55.41	68.20	-12.79
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

(3) Chain 2:

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

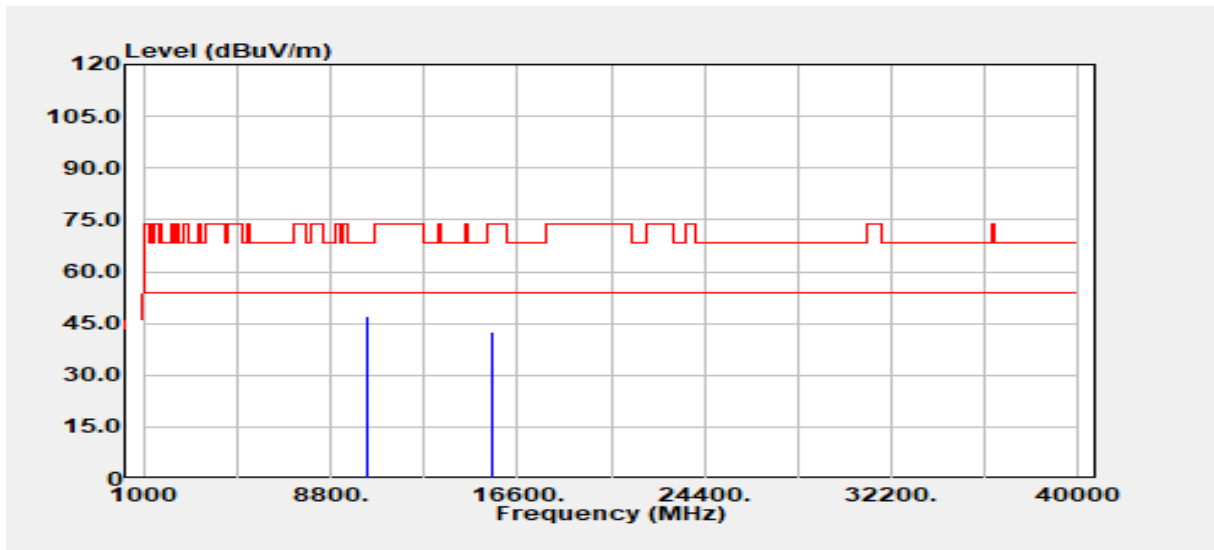


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	35.67	11.26	46.94	68.20	-21.26
15540.00	Peak	30.20	12.38	42.58	74.00	-31.42
15540.00	Average	26.19	12.38	38.57	54.00	-15.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

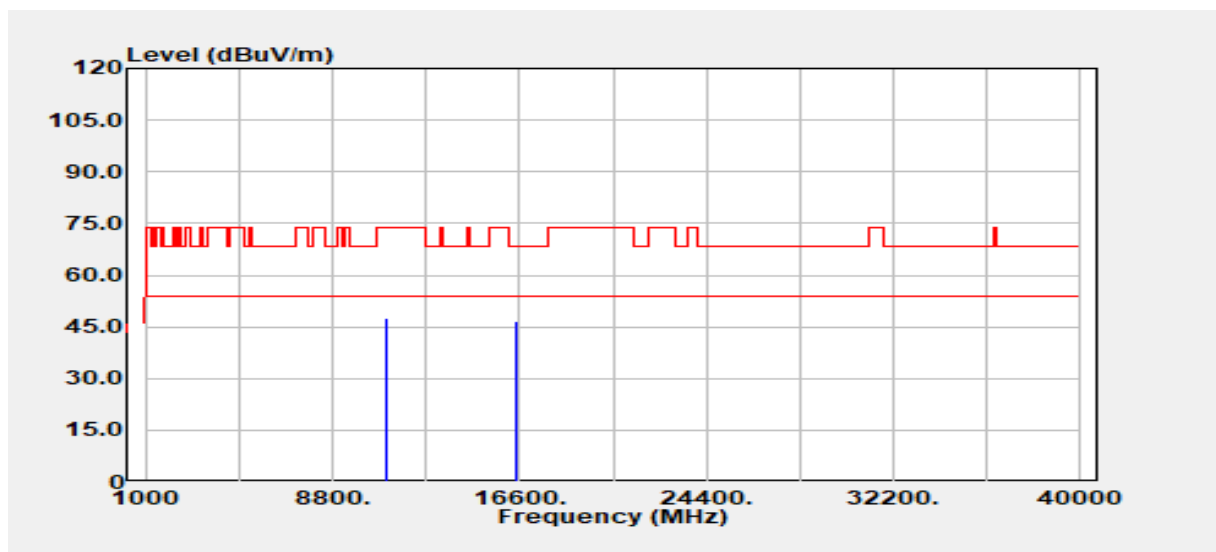


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	35.19	12.42	47.61	74.00	-26.39
11000.00	Average	31.81	12.42	44.23	54.00	-9.77
16500.00	Peak	27.86	18.70	46.56	68.20	-21.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

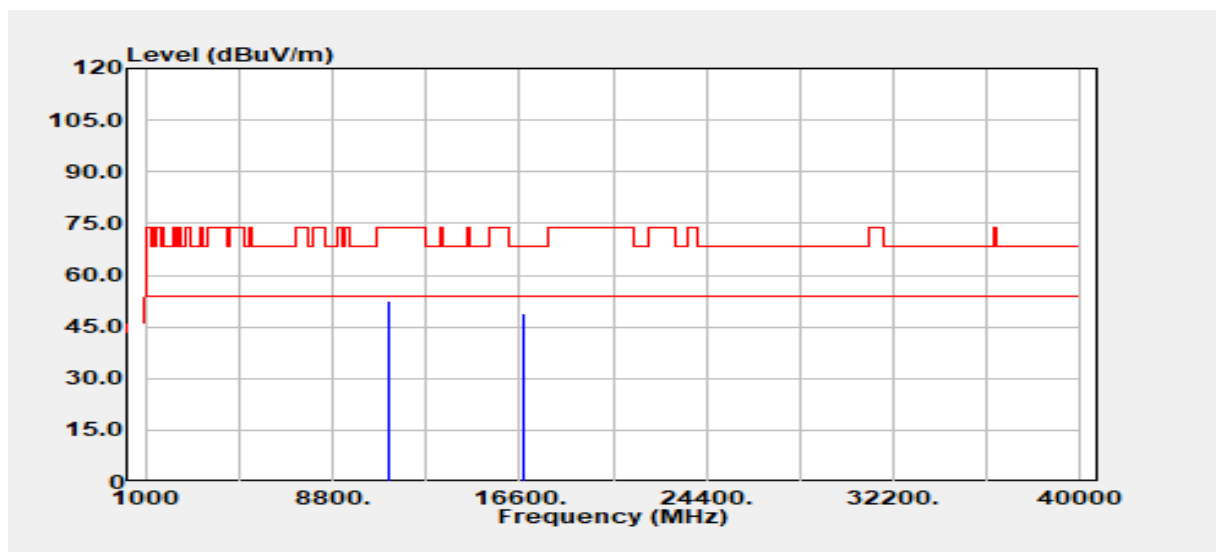


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	39.96	12.48	52.44	74.00	-21.56
11160.00	Average	36.08	12.48	48.55	54.00	-5.45
16740.00	Peak	28.16	20.88	49.03	68.20	-19.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

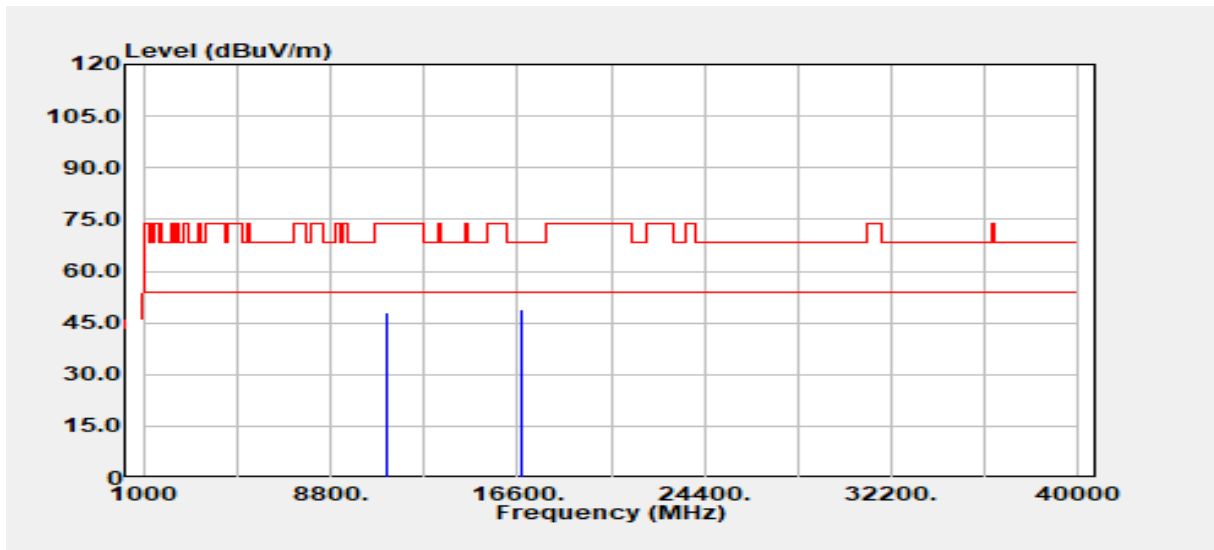


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11160.00	Peak	35.71	12.48	48.19	74.00	-25.81
11160.00	Average	35.18	12.48	47.65	54.00	-6.35
16740.00	Peak	28.02	20.88	48.89	68.20	-19.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

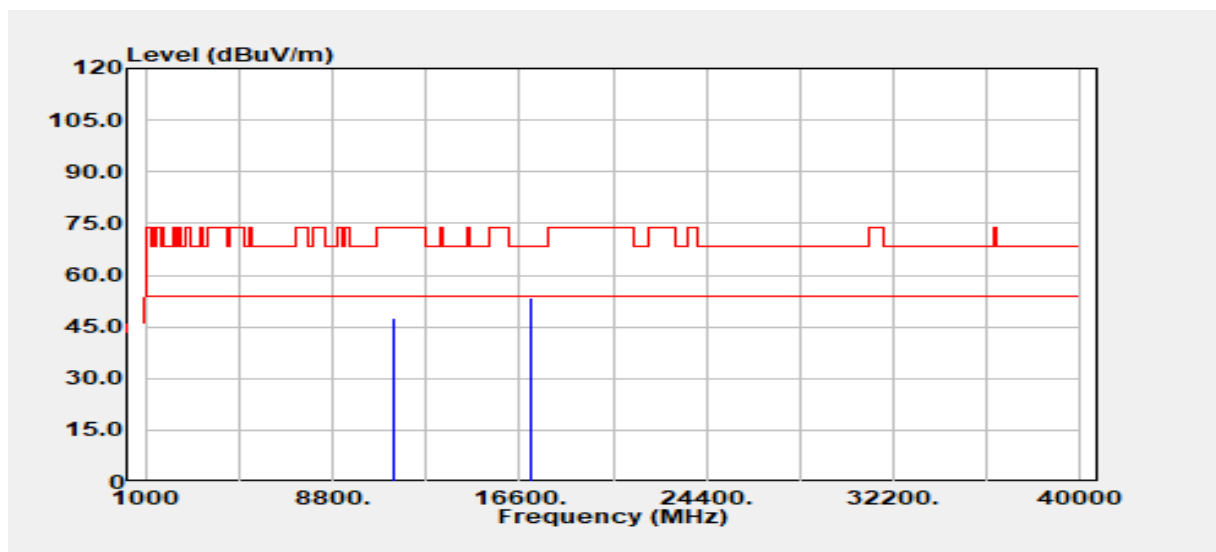


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	35.14	12.39	47.53	74.00	-26.47
11400.00	Average	30.53	12.39	42.92	54.00	-11.08
17100.00	Peak	27.89	25.62	53.51	68.20	-14.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

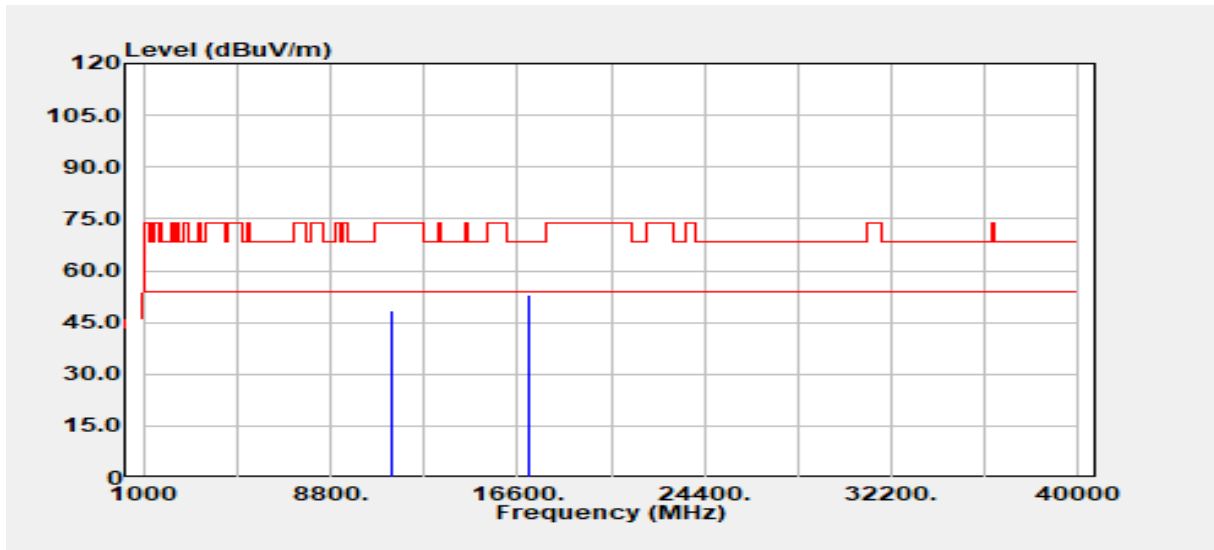

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	35.88	12.39	48.27	74.00	-25.73
11400.00	Average	29.96	12.39	42.35	54.00	-11.65
17100.00	Peak	27.42	25.62	53.04	68.20	-15.16
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

(4) MIMO:

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

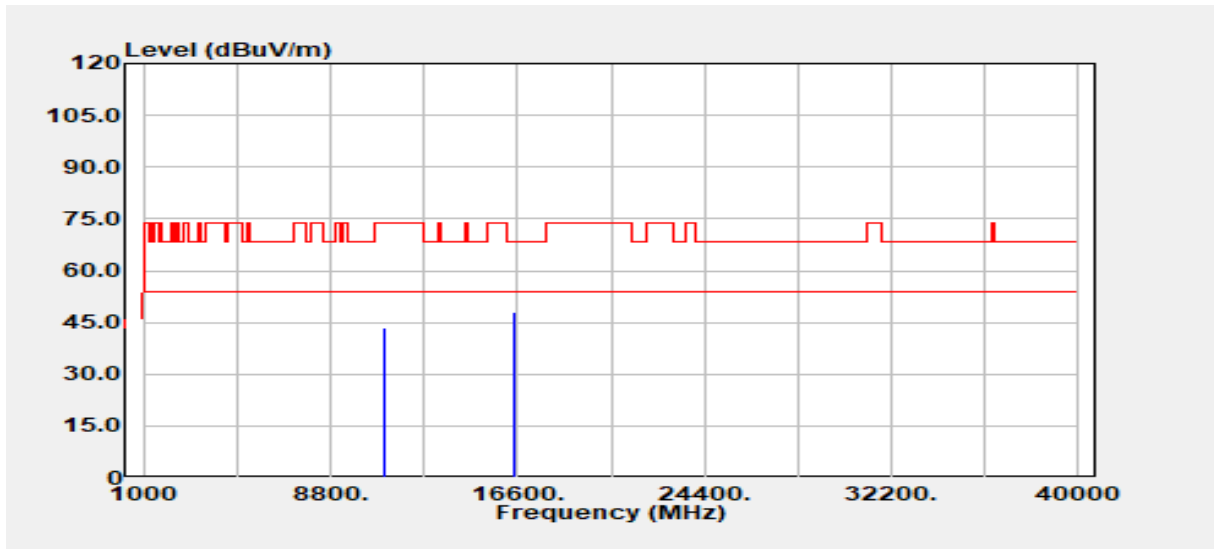


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	31.06	12.42	43.48	74.00	-30.52
11000.00	Average	23.38	12.42	35.80	54.00	-18.20
16500.00	Peak	29.31	18.70	48.01	68.20	-20.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

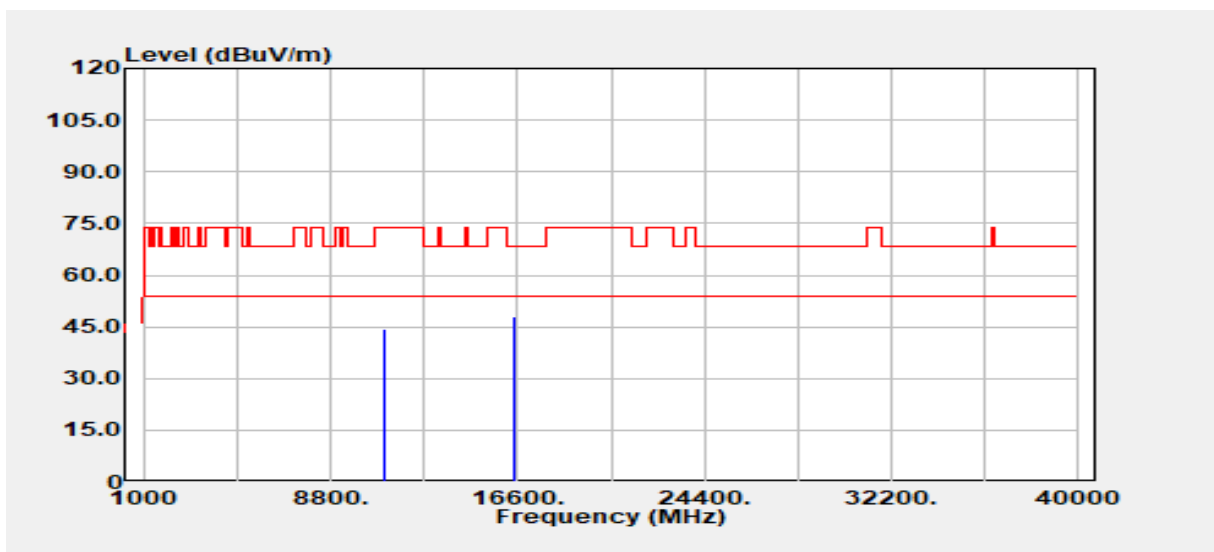


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	31.81	12.42	44.23	74.00	-29.77
11000.00	Average	23.90	12.42	36.32	54.00	-17.68
16500.00	Peak	29.22	18.70	47.92	68.20	-20.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5580 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

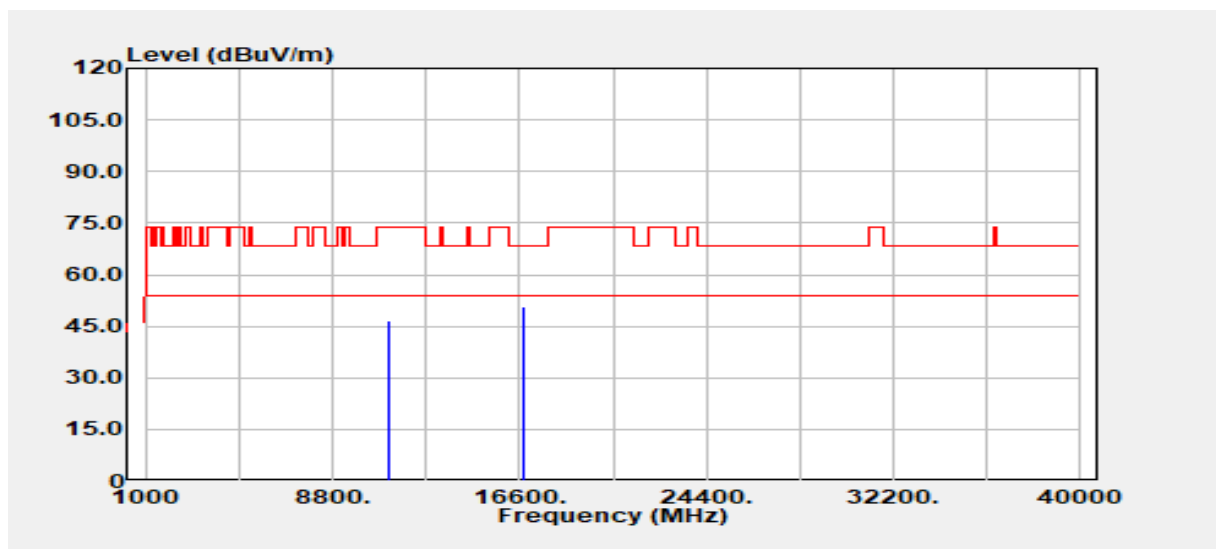


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	34.25	12.48	46.73	74.00	-27.27
11160.00	Average	26.92	12.48	39.40	54.00	-14.60
16740.00	Peak	29.88	20.88	50.76	68.20	-17.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5580 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

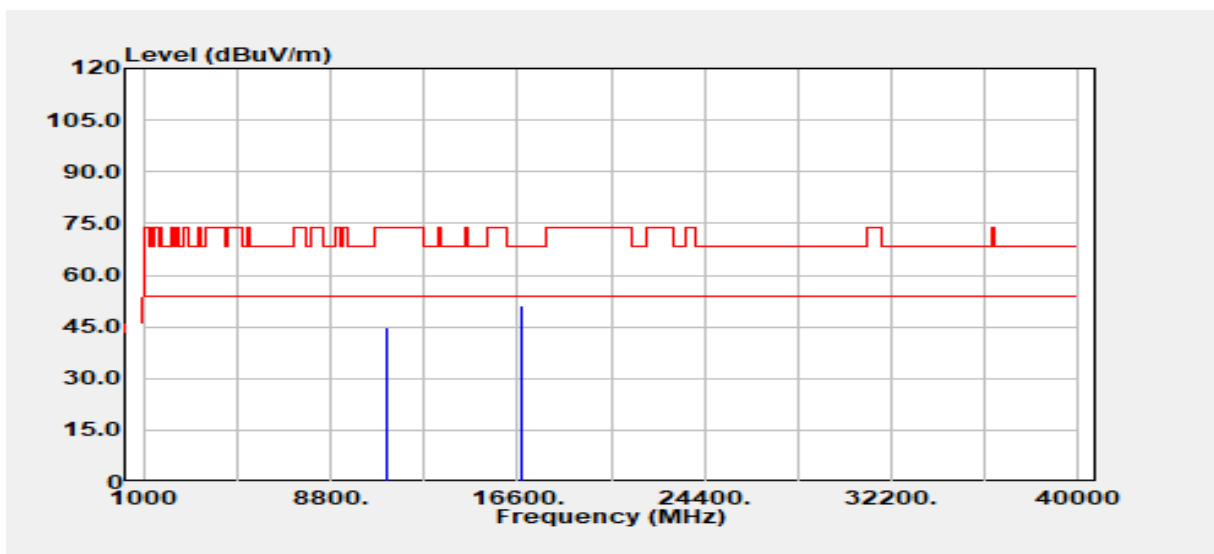


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	32.35	12.48	44.83	74.00	-29.17
11160.00	Average	24.29	12.48	36.77	54.00	-17.23
16740.00	Peak	30.12	20.88	50.99	68.20	-17.21
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

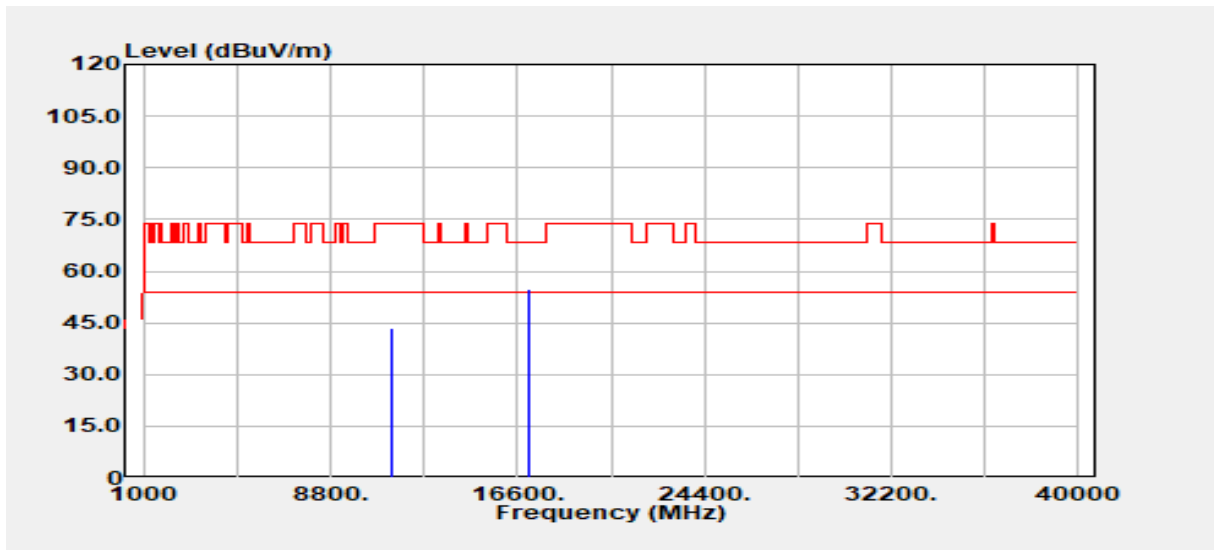


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	30.90	12.39	43.29	74.00	-30.71
11400.00	Average	23.07	12.39	35.46	54.00	-18.54
17100.00	Peak	29.28	25.62	54.90	68.20	-13.30
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

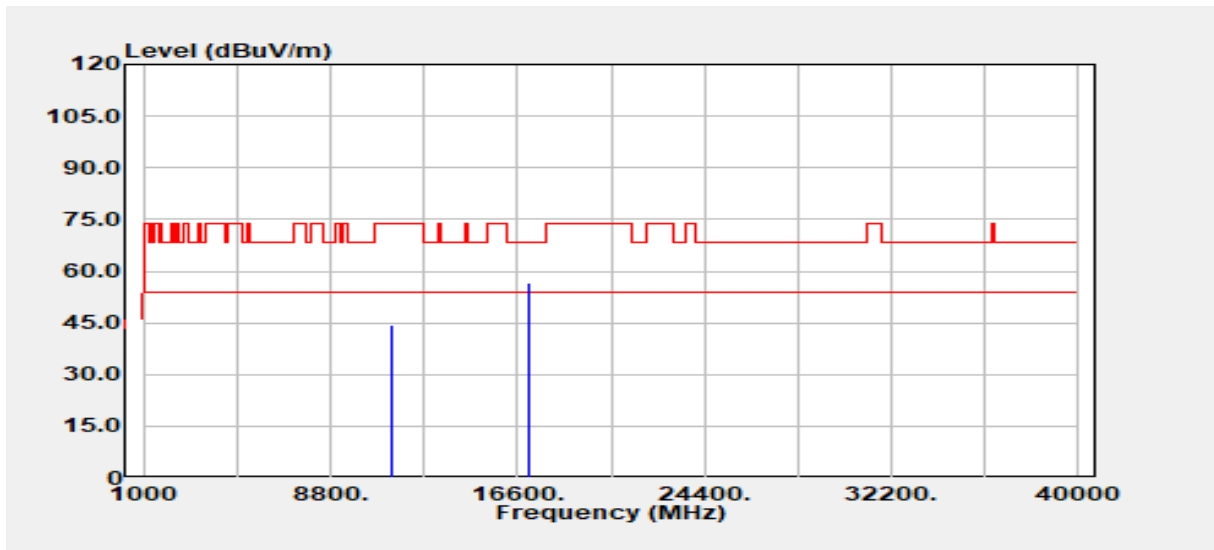


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	32.19	12.39	44.58	74.00	-29.42
11400.00	Average	22.70	12.39	35.09	54.00	-18.91
17100.00	Peak	31.10	25.62	56.72	68.20	-11.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

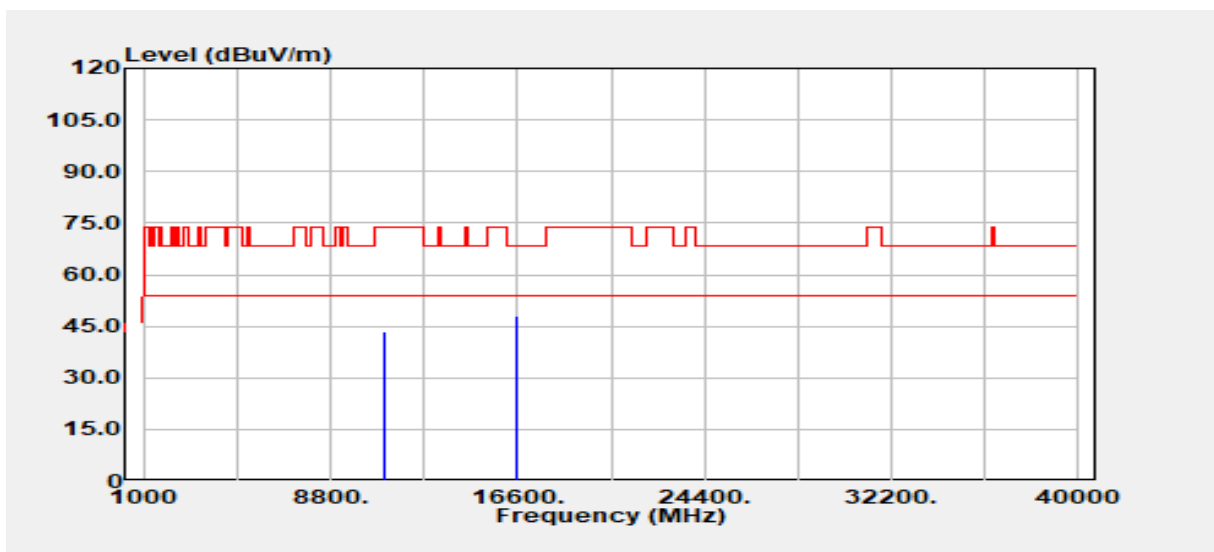


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	30.98	12.39	43.37	74.00	-30.63
11020.00	Average	23.37	12.39	35.76	54.00	-18.24
16530.00	Peak	29.42	18.66	48.08	68.20	-20.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

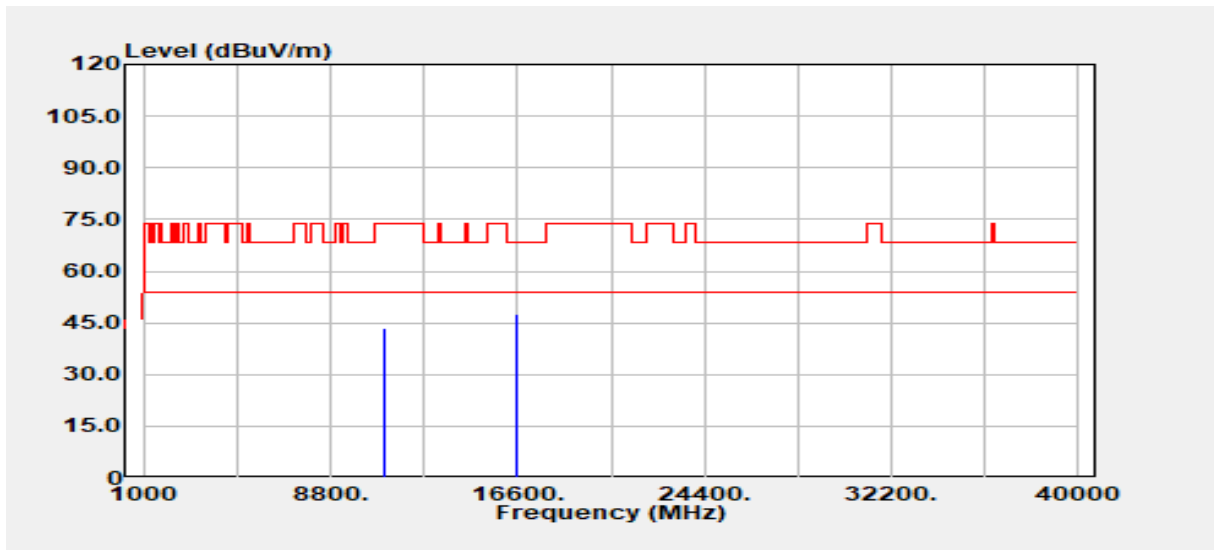


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	31.24	12.39	43.63	74.00	-30.37
11020.00	Average	25.51	12.39	37.90	54.00	-16.10
16530.00	Peak	28.83	18.66	47.49	68.20	-20.71
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5550 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

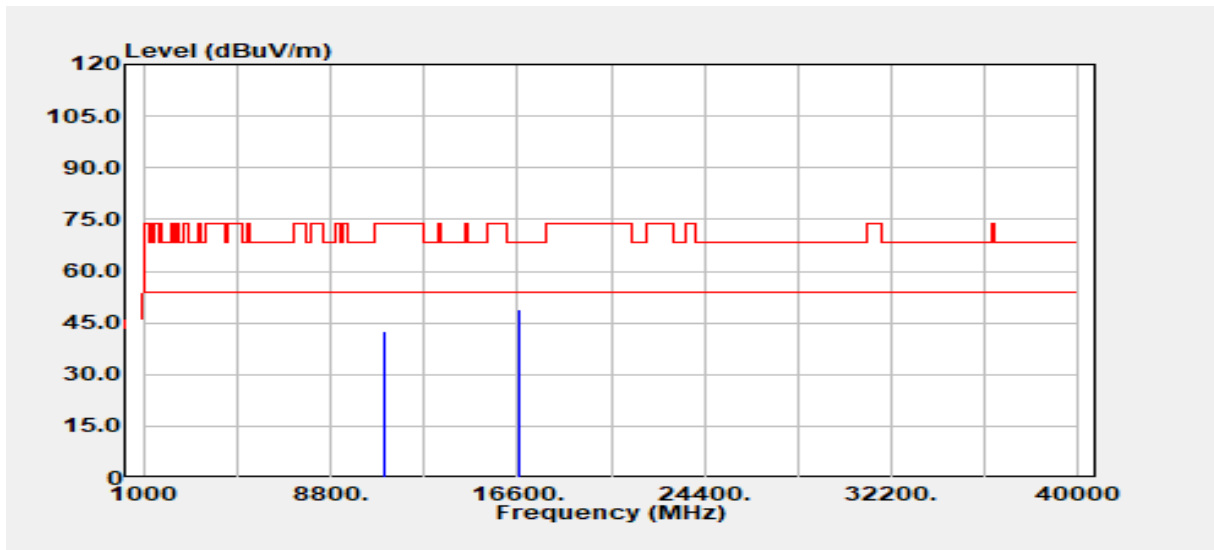


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	29.99	12.60	42.59	74.00	-31.41
11100.00	Average	23.45	12.60	36.05	54.00	-17.95
16650.00	Peak	28.75	19.99	48.73	68.20	-19.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5550 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

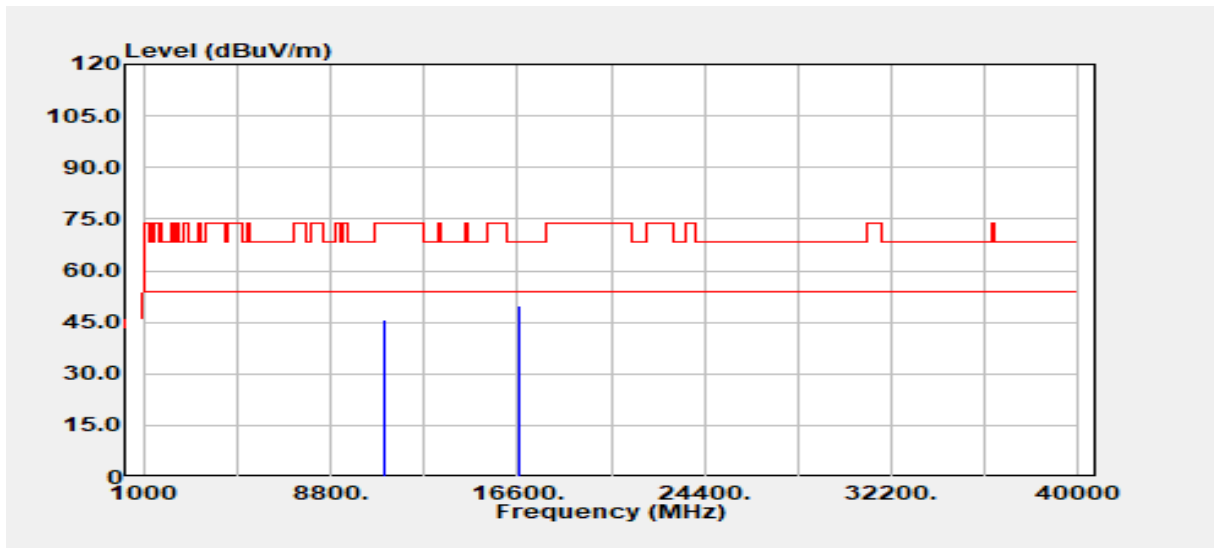


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.00	Peak	33.17	12.60	45.77	74.00	-28.23
11100.00	Average	25.96	12.60	38.56	54.00	-15.44
16650.00	Peak	29.76	19.99	49.75	68.20	-18.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

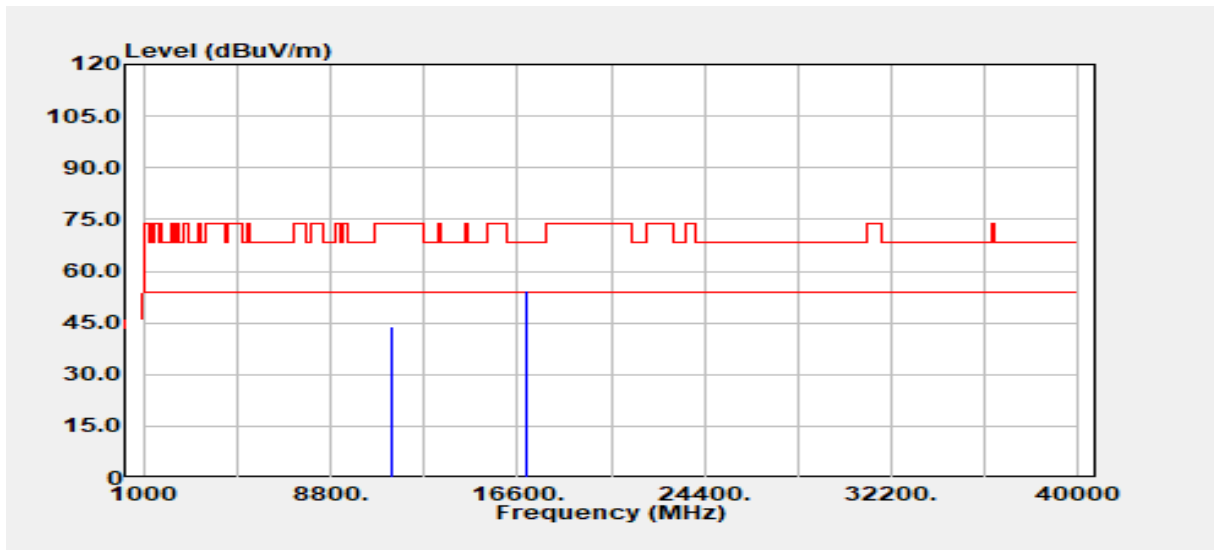


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	31.44	12.55	43.99	74.00	-30.01
11340.00	Average	23.33	12.55	35.89	54.00	-18.11
17010.00	Peak	28.84	25.32	54.16	68.20	-14.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

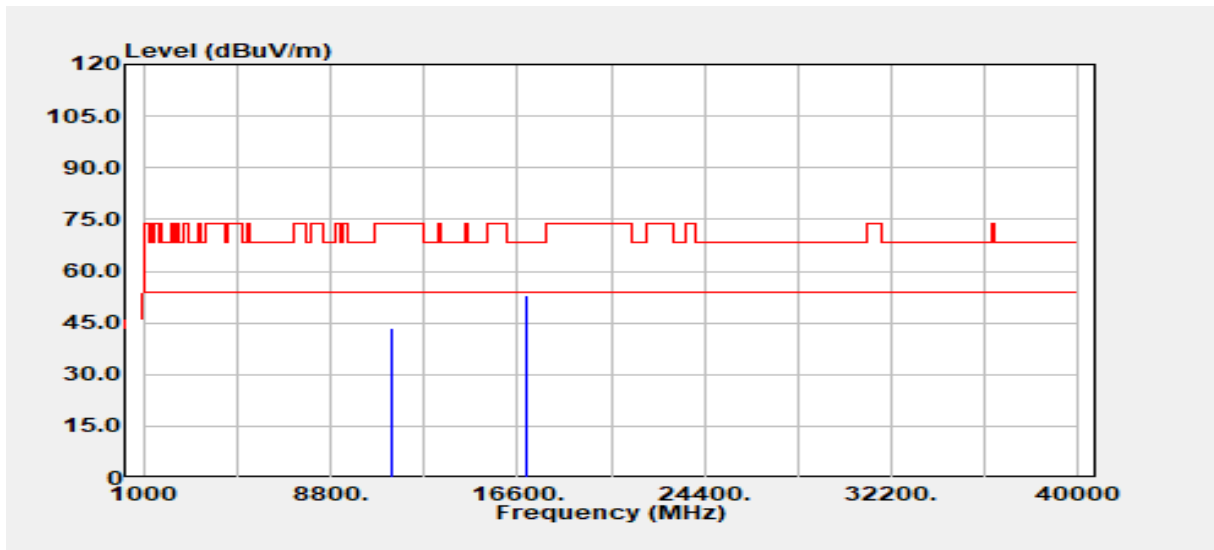


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11340.00	Peak	30.82	12.55	43.37	74.00	-30.63
11340.00	Average	24.21	12.55	36.77	54.00	-17.23
17010.00	Peak	27.52	25.32	52.84	68.20	-15.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

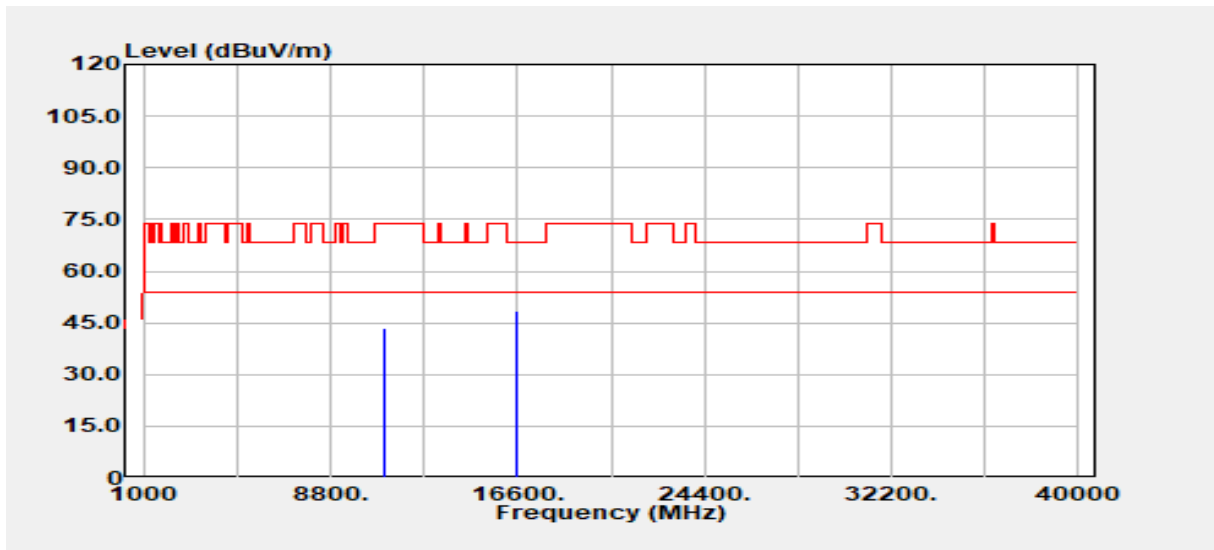


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11060.00	Peak	30.85	12.40	43.25	74.00	-30.75
11060.00	Average	24.12	12.40	36.51	54.00	-17.49
16590.00	Peak	29.07	19.22	48.29	68.20	-19.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

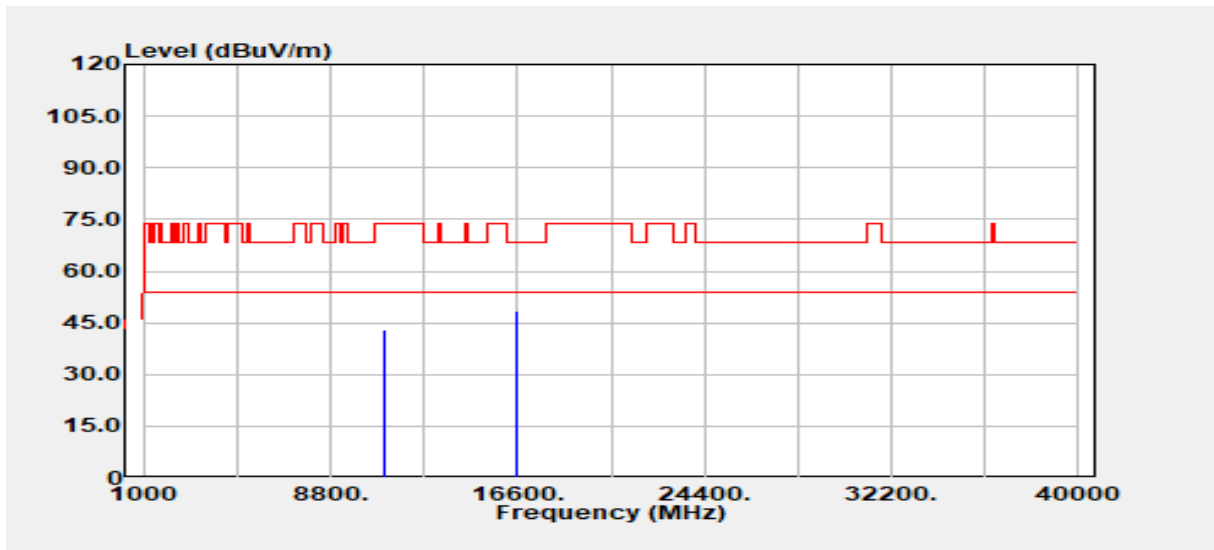


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	30.80	12.40	43.20	74.00	-30.80
11060.00	Average	24.26	12.40	36.65	54.00	-17.35
16590.00	Peak	29.43	19.22	48.65	68.20	-19.55
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

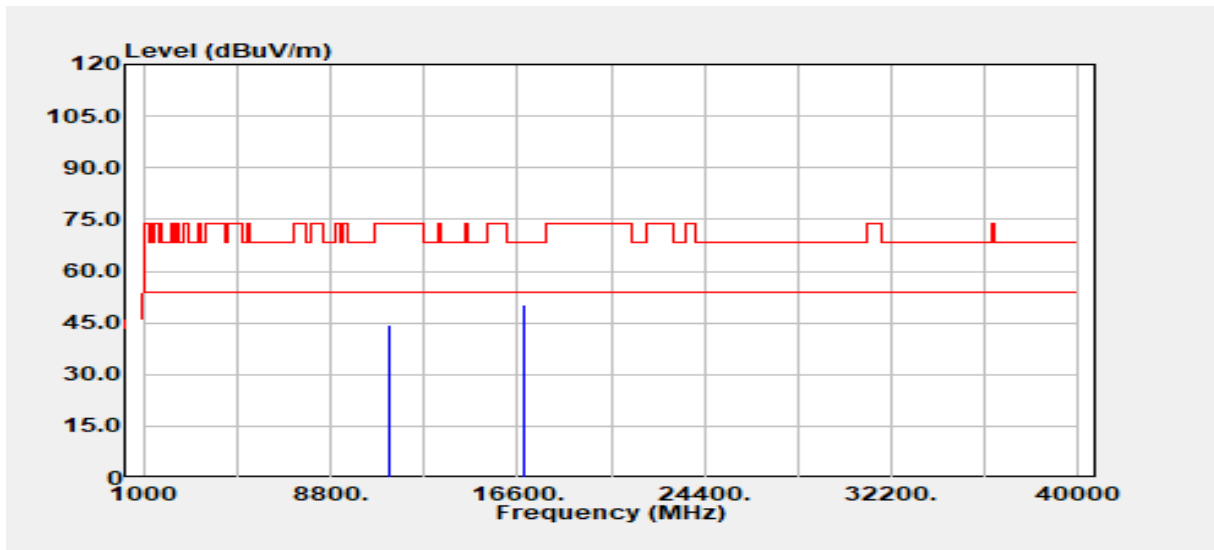


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11220.00	Peak	31.60	12.60	44.20	74.00	-29.80
11220.00	Average	24.68	12.60	37.28	54.00	-16.72
16830.00	Peak	28.14	22.01	50.15	68.20	-18.05
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

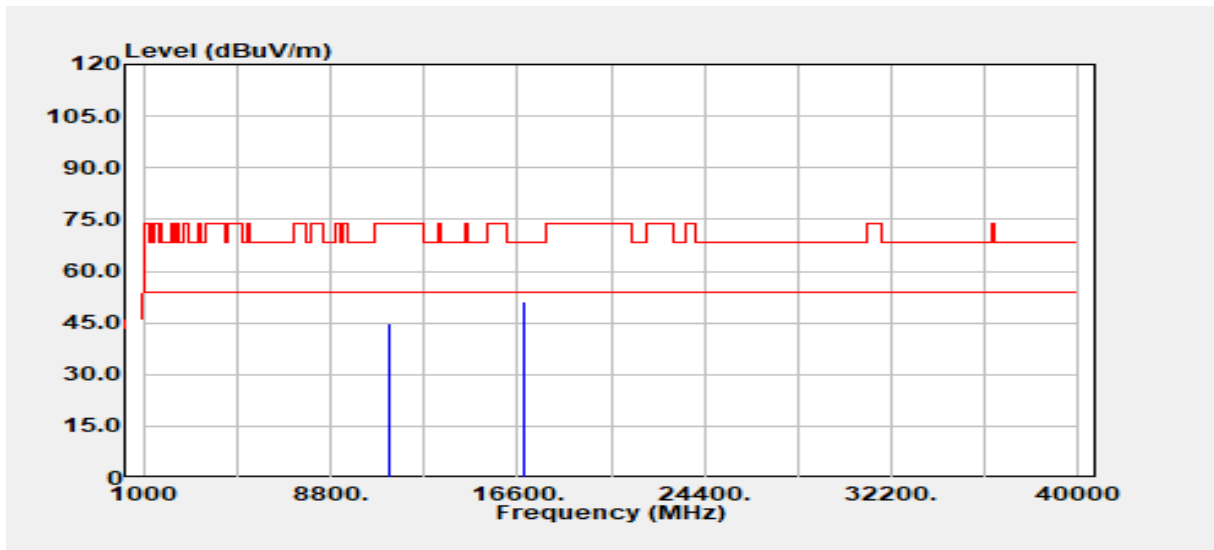


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11220.00	Peak	32.12	12.60	44.72	74.00	-29.28
11220.00	Average	25.82	12.60	38.42	54.00	-15.58
16830.00	Peak	29.13	22.01	51.14	68.20	-17.06
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 5770 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

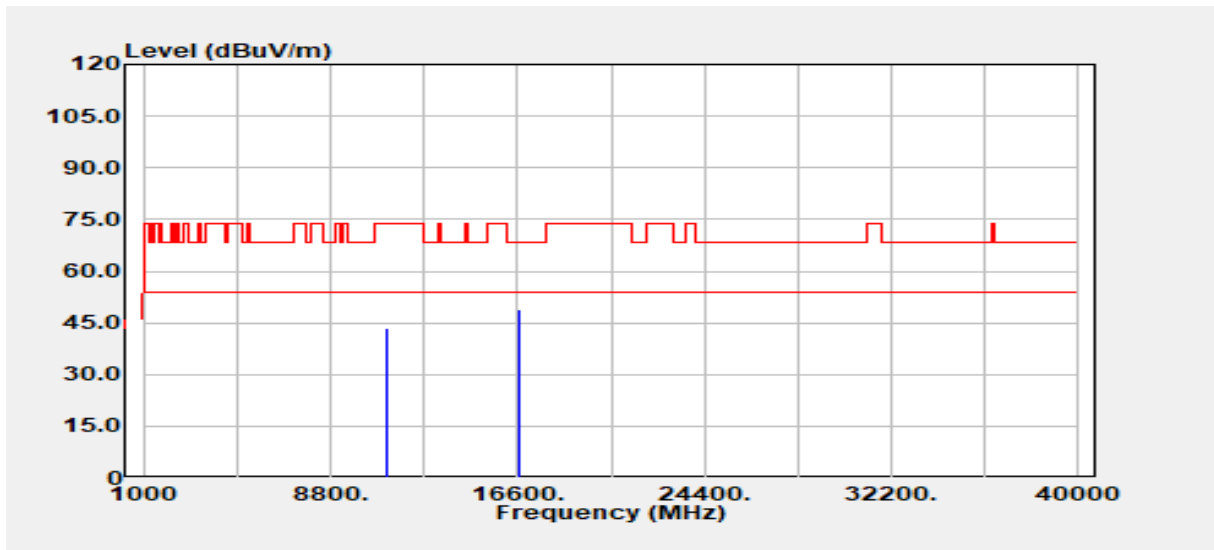


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11140.00	Peak	30.82	12.49	43.31	74.00	-30.69
11140.00	Average	24.36	12.49	36.85	54.00	-17.15
16710.00	Peak	28.38	20.67	49.05	68.20	-19.15
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 5770 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

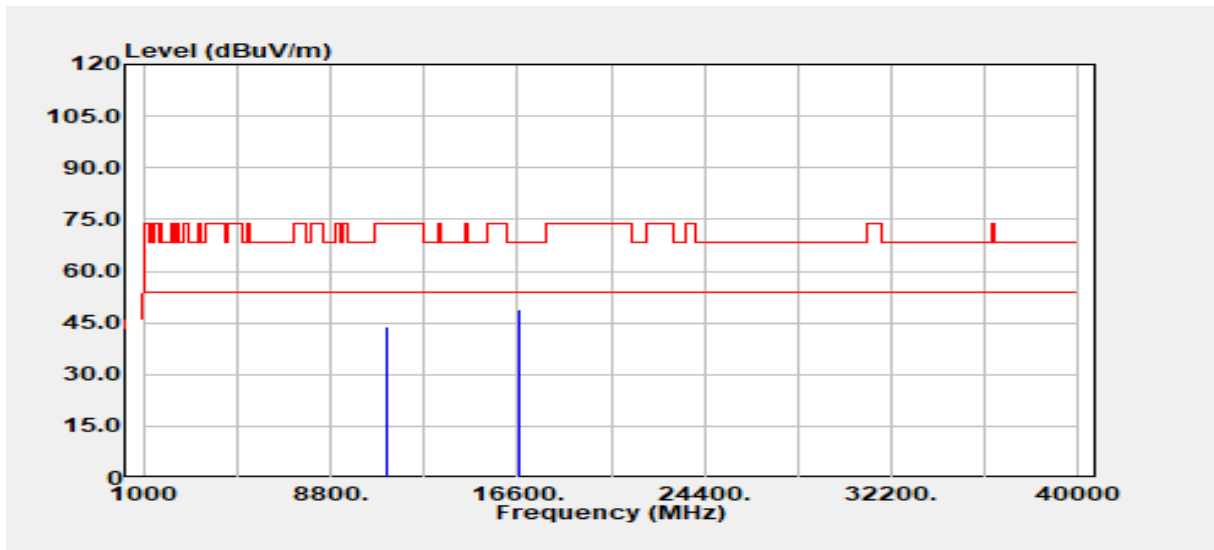


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11140.00	Peak	31.31	12.49	43.79	74.00	-30.21
11140.00	Average	24.34	12.49	36.82	54.00	-17.18
16710.00	Peak	28.44	20.67	49.11	68.20	-19.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

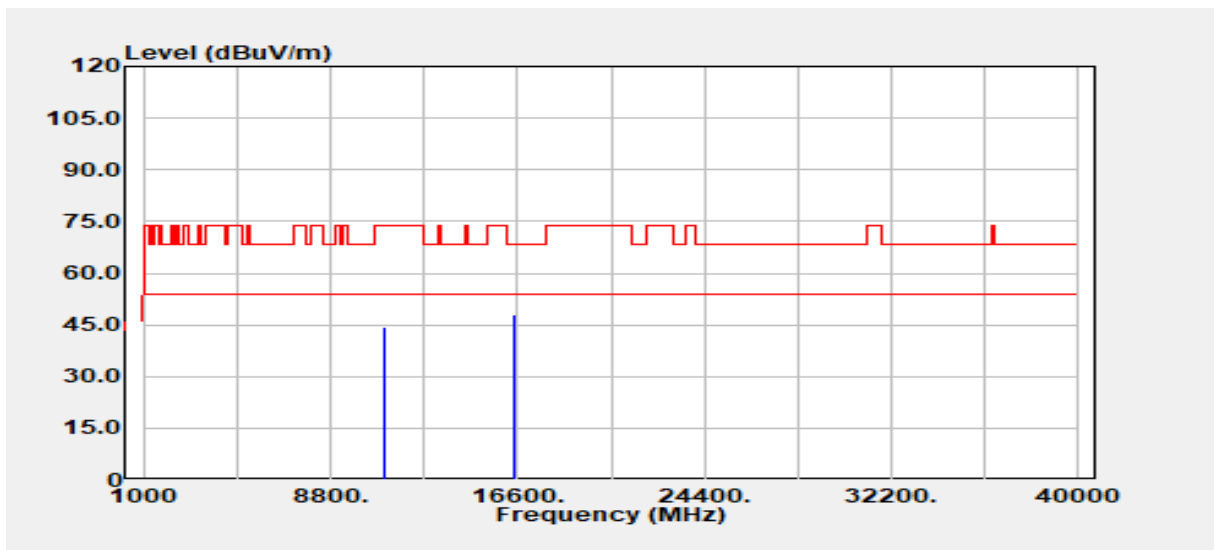


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	31.85	12.42	44.27	74.00	-29.73
11000.00	Average	24.97	12.42	37.39	54.00	-16.61
16500.00	Peak	29.16	18.70	47.86	68.20	-20.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

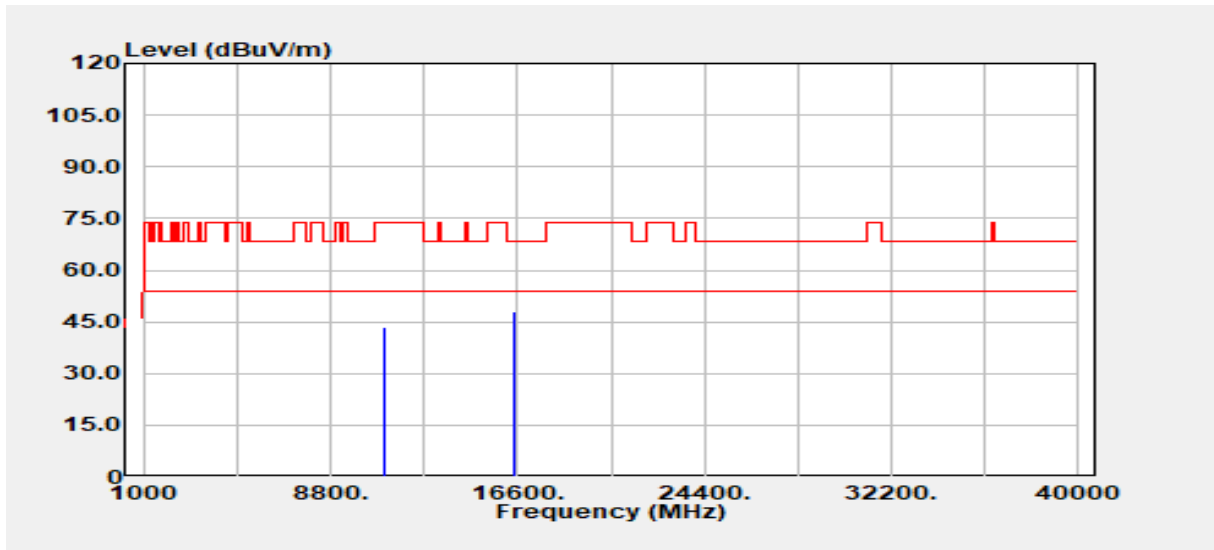


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11000.00	Peak	31.23	12.42	43.65	74.00	-30.35
11000.00	Average	26.06	12.42	38.48	54.00	-15.52
16500.00	Peak	29.17	18.70	47.87	68.20	-20.33
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

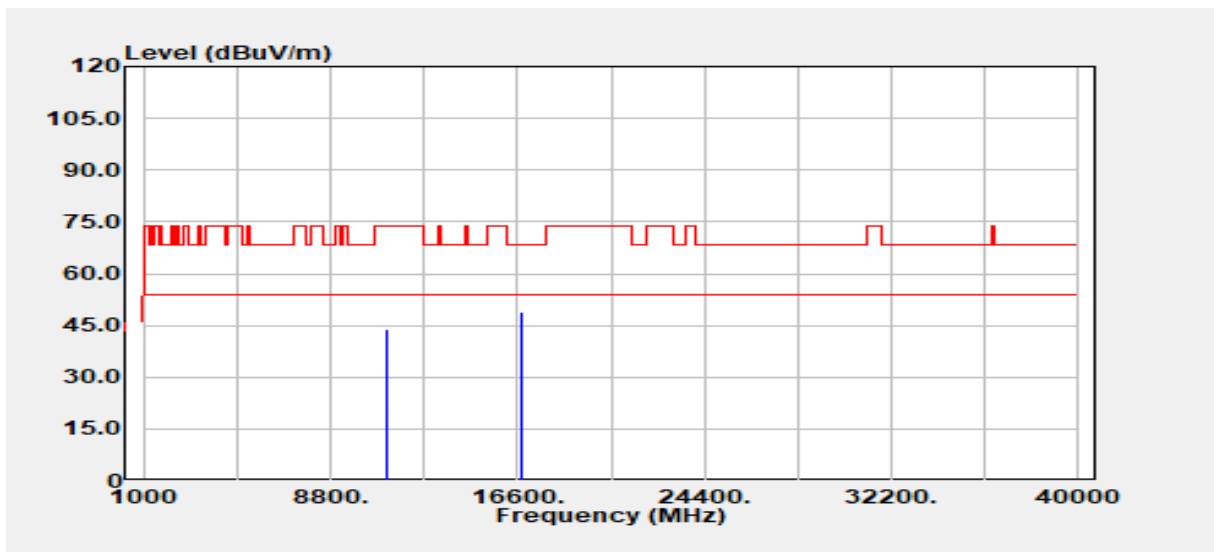


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	31.55	12.48	44.03	74.00	-29.97
11160.00	Average	26.46	12.48	38.94	54.00	-15.06
16740.00	Peak	28.22	20.88	49.10	68.20	-19.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

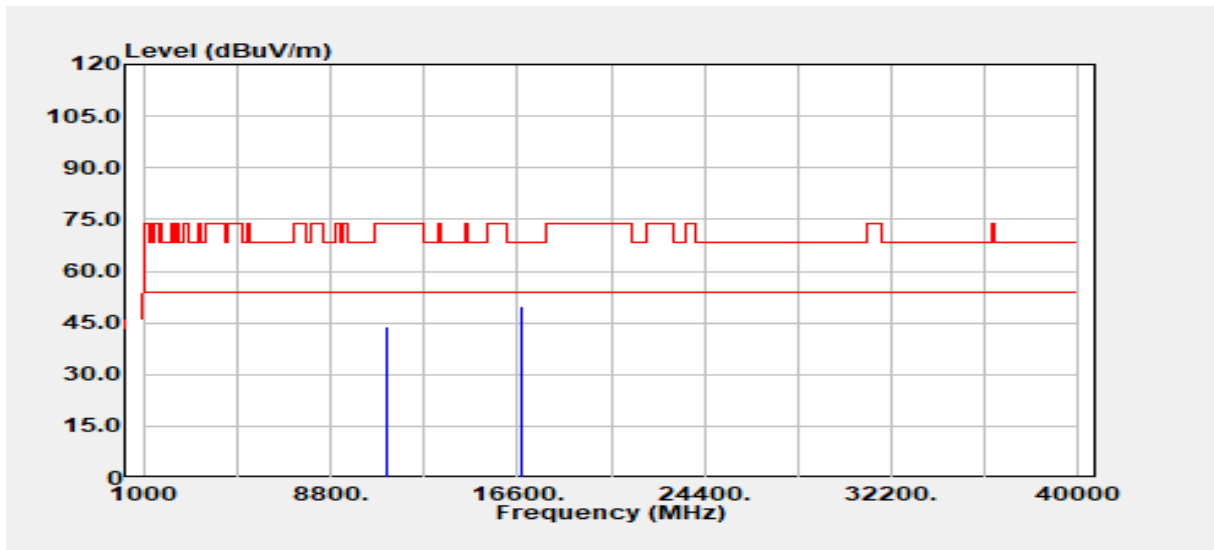


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	31.63	12.48	44.11	74.00	-29.89
11160.00	Average	27.46	12.48	39.94	54.00	-14.06
16740.00	Peak	28.94	20.88	49.82	68.20	-18.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

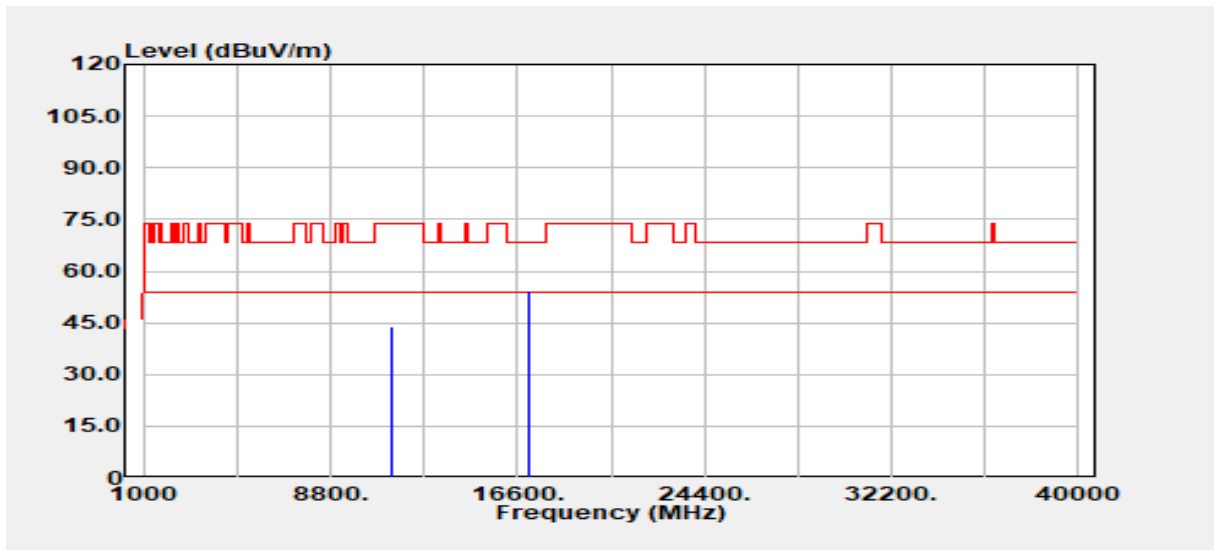


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	31.47	12.39	43.86	74.00	-30.14
11400.00	Average	24.96	12.39	37.35	54.00	-16.65
17100.00	Peak	28.94	25.62	54.56	68.20	-13.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

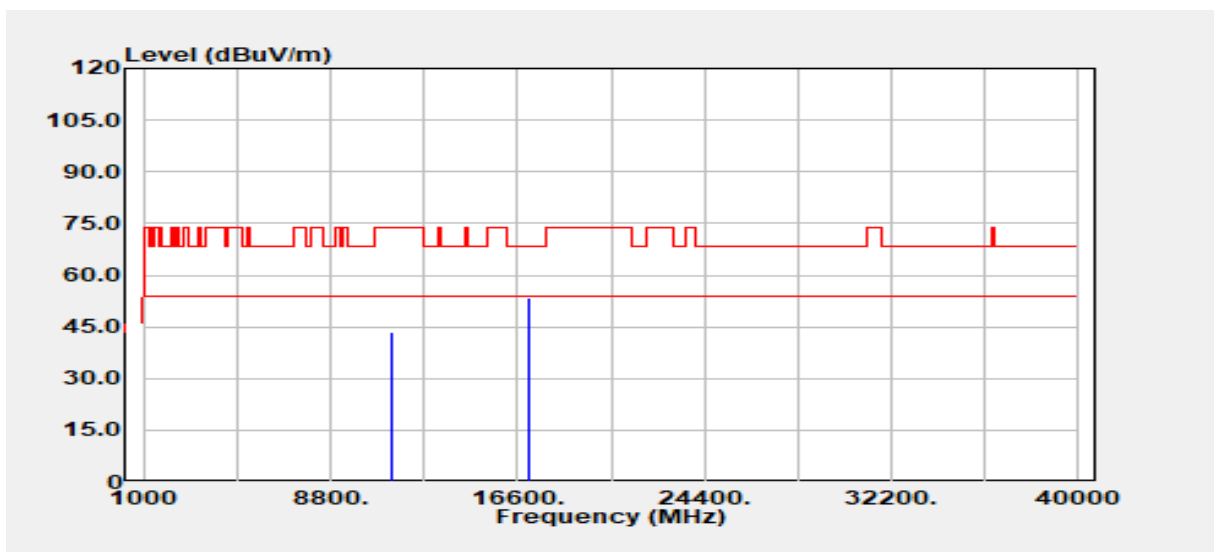


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	31.14	12.39	43.53	74.00	-30.47
11400.00	Average	24.95	12.39	37.34	54.00	-16.66
17100.00	Peak	27.98	25.62	53.60	68.20	-14.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

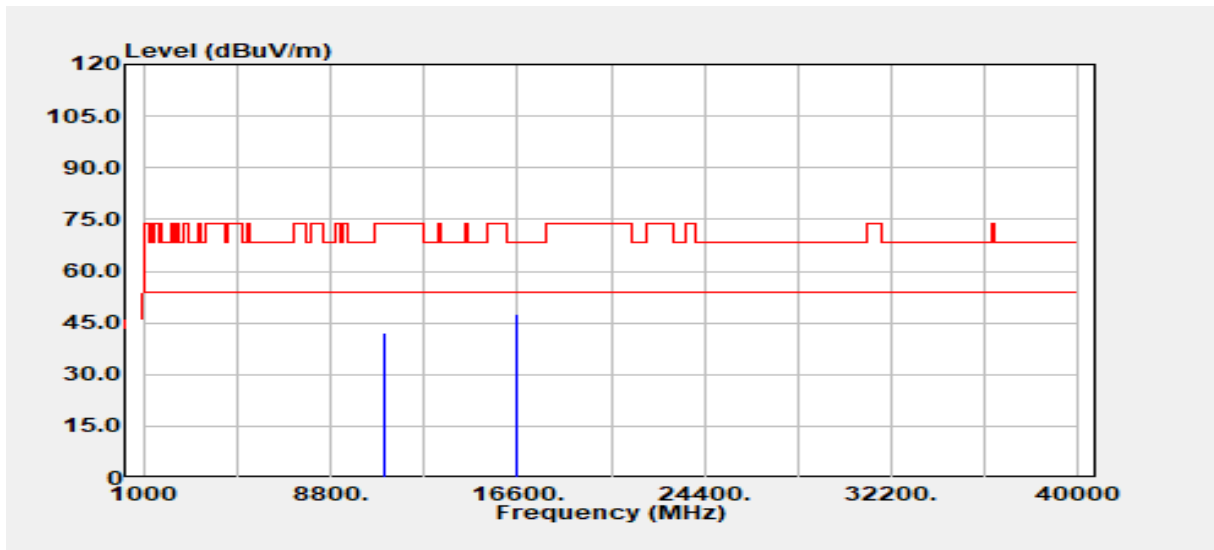


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11020.00	Peak	29.91	12.39	42.30	74.00	-31.70
11020.00	Average	23.45	12.39	35.84	54.00	-18.16
16530.00	Peak	28.91	18.66	47.57	68.20	-20.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

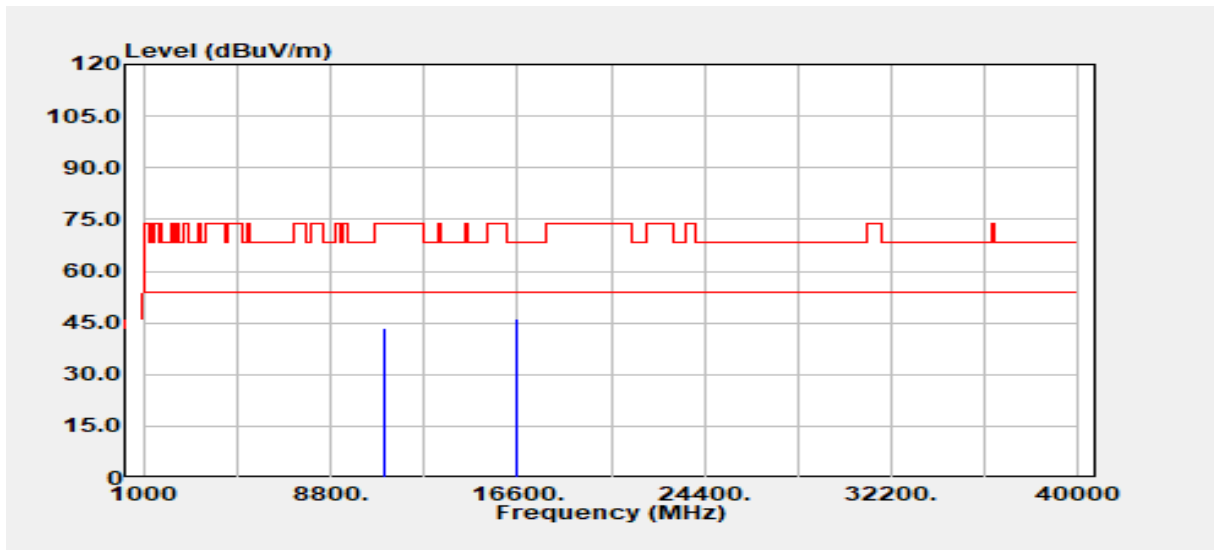


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11020.00	Peak	30.98	12.39	43.37	74.00	-30.63
11020.00	Average	25.38	12.39	37.77	54.00	-16.23
16530.00	Peak	27.62	18.66	46.28	68.20	-21.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

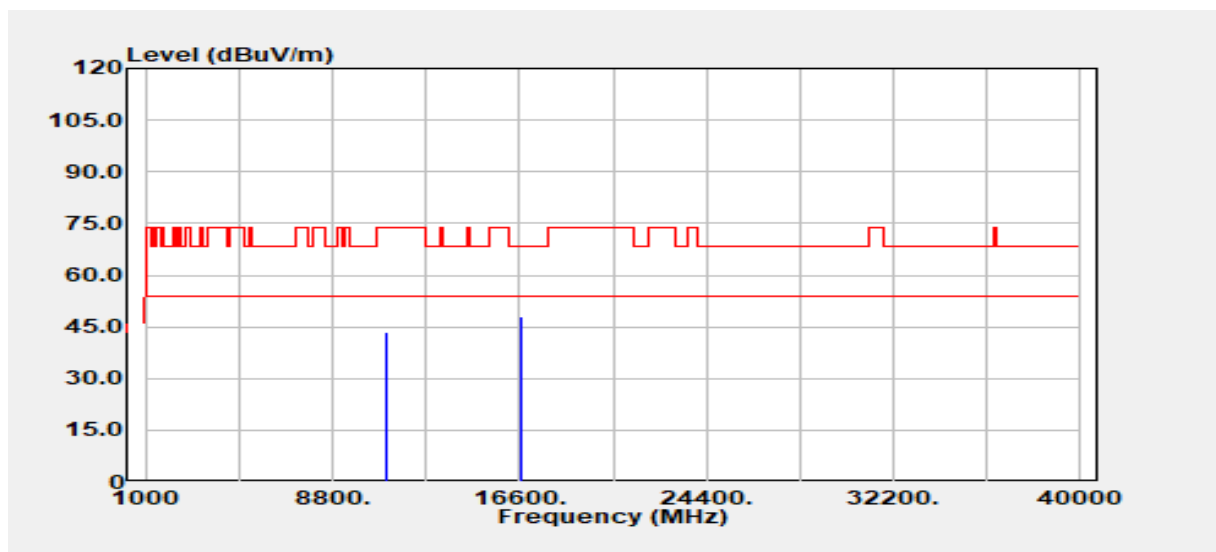


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	31.03	12.60	43.63	74.00	-30.37
11100.00	Average	24.53	12.60	37.13	54.00	-16.87
16650.00	Peak	28.21	19.99	48.20	68.20	-20.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

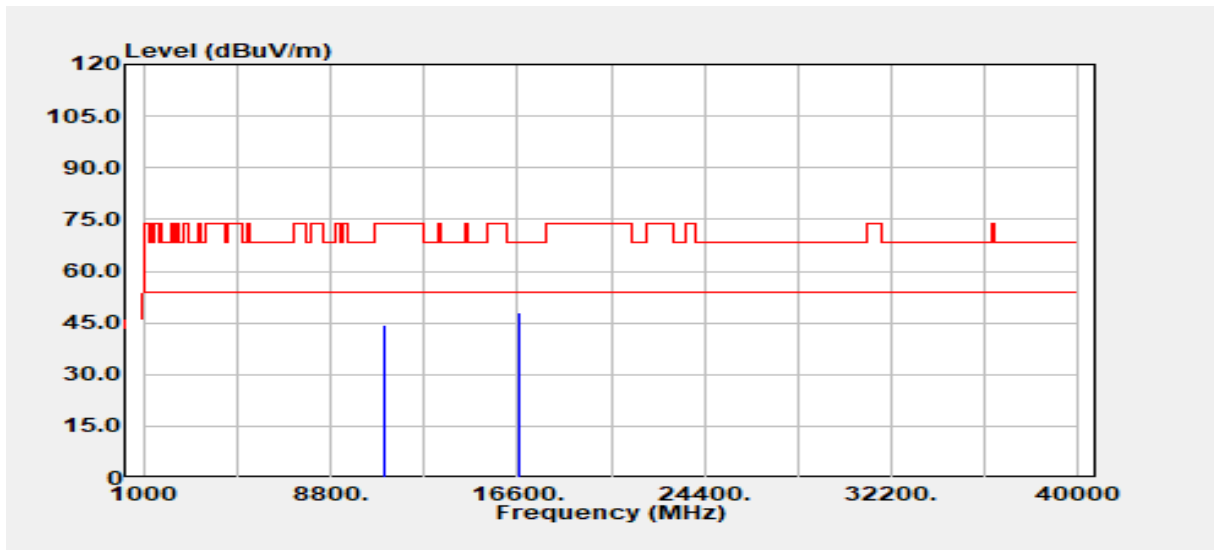


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.00	Peak	31.61	12.60	44.21	74.00	-29.79
11100.00	Average	25.58	12.60	38.18	54.00	-15.82
16650.00	Peak	28.01	19.99	48.00	68.20	-20.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

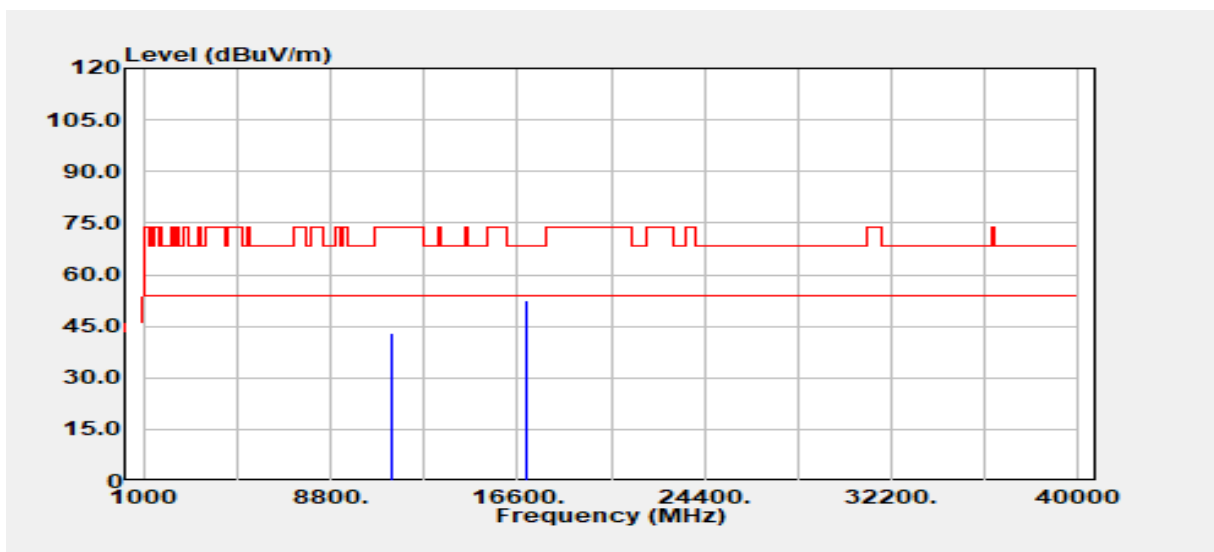


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	30.42	12.55	42.97	74.00	-31.03
11340.00	Average	24.29	12.55	36.84	54.00	-17.16
17010.00	Peak	27.02	25.32	52.34	68.20	-15.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

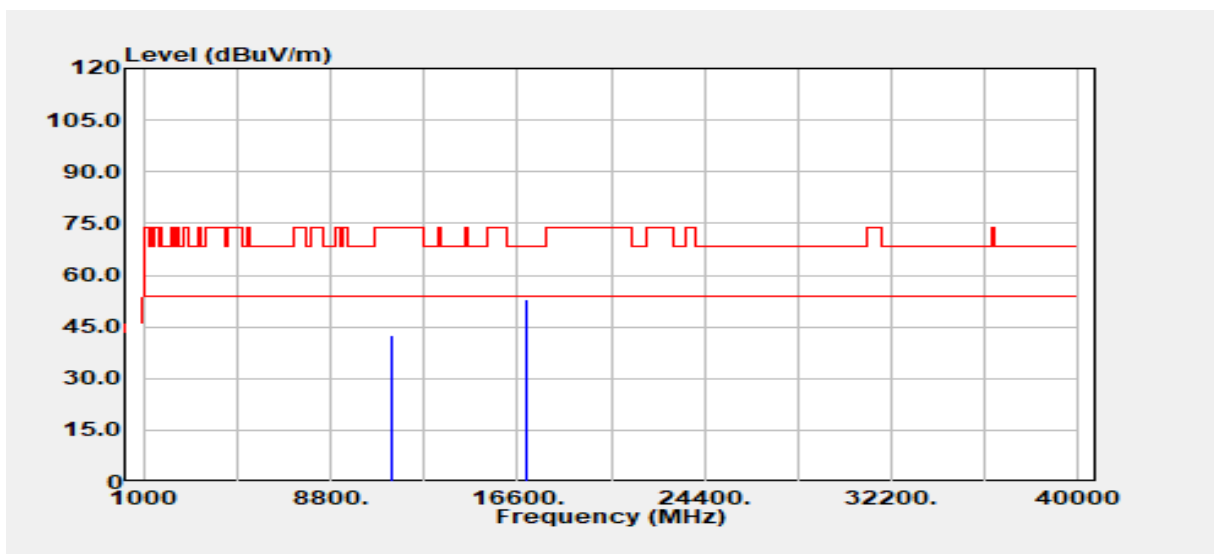


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	30.05	12.55	42.60	74.00	-31.40
11340.00	Average	23.80	12.55	36.35	54.00	-17.65
17010.00	Peak	27.45	25.32	52.76	68.20	-15.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

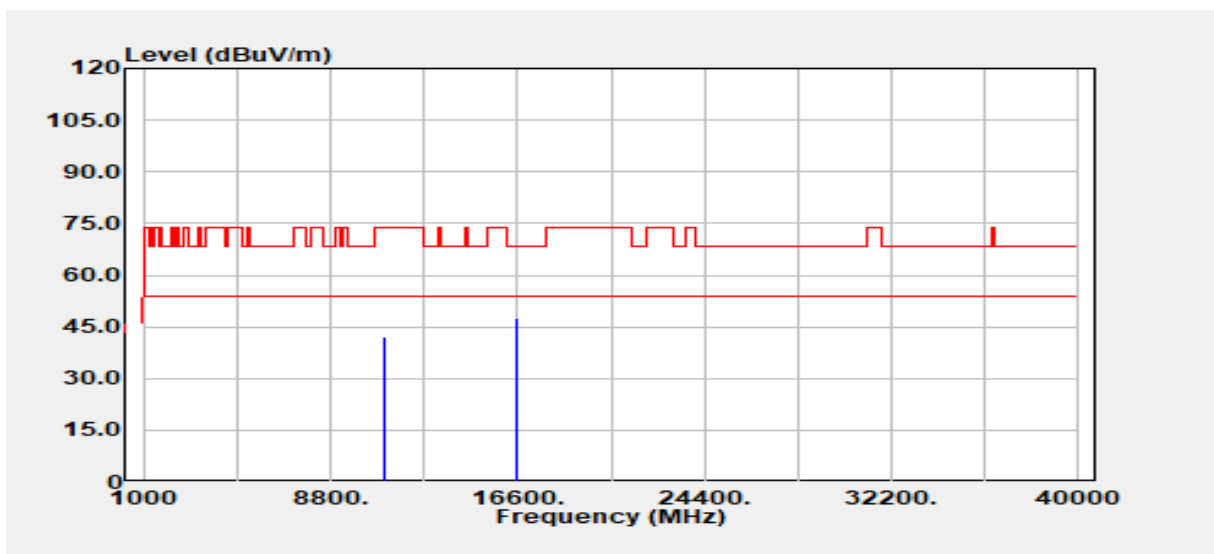


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	29.79	12.40	42.19	74.00	-31.81
11060.00	Average	23.88	12.40	36.27	54.00	-17.73
16590.00	Peak	28.34	19.22	47.57	68.20	-20.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

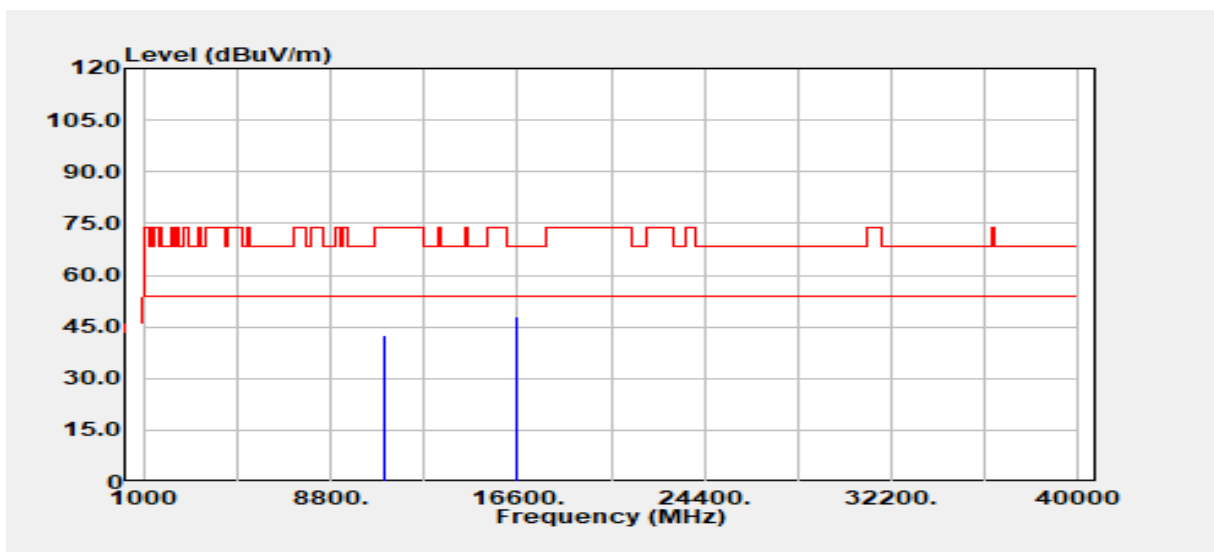


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	30.28	12.40	42.68	74.00	-31.32
11060.00	Average	23.91	12.40	36.31	54.00	-17.69
16590.00	Peak	28.75	19.22	47.97	68.20	-20.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

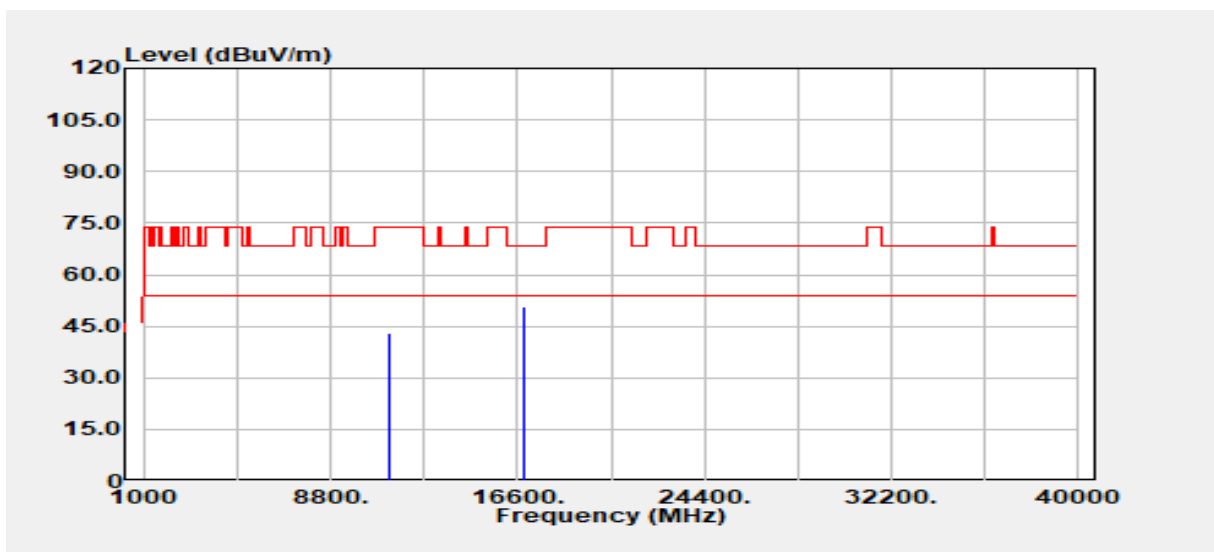


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11220.00	Peak	30.35	12.60	42.96	74.00	-31.04
11220.00	Average	24.39	12.60	37.00	54.00	-17.00
16830.00	Peak	28.56	22.01	50.56	68.20	-17.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

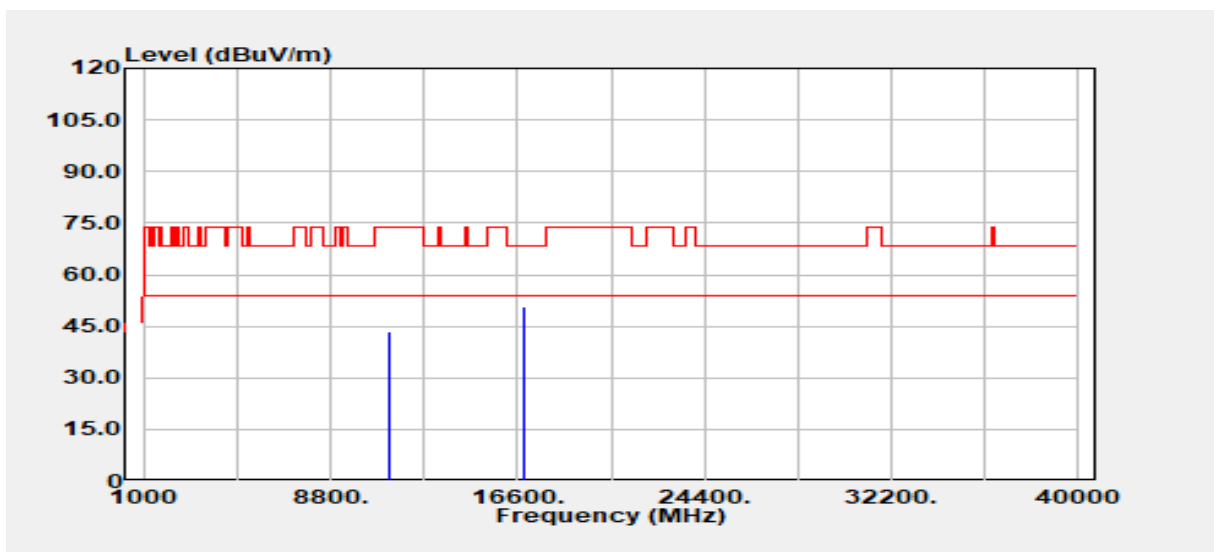


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11220.00	Peak	30.69	12.60	43.30	74.00	-30.70
11220.00	Average	24.42	12.60	37.02	54.00	-16.98
16830.00	Peak	28.65	22.01	50.66	68.20	-17.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

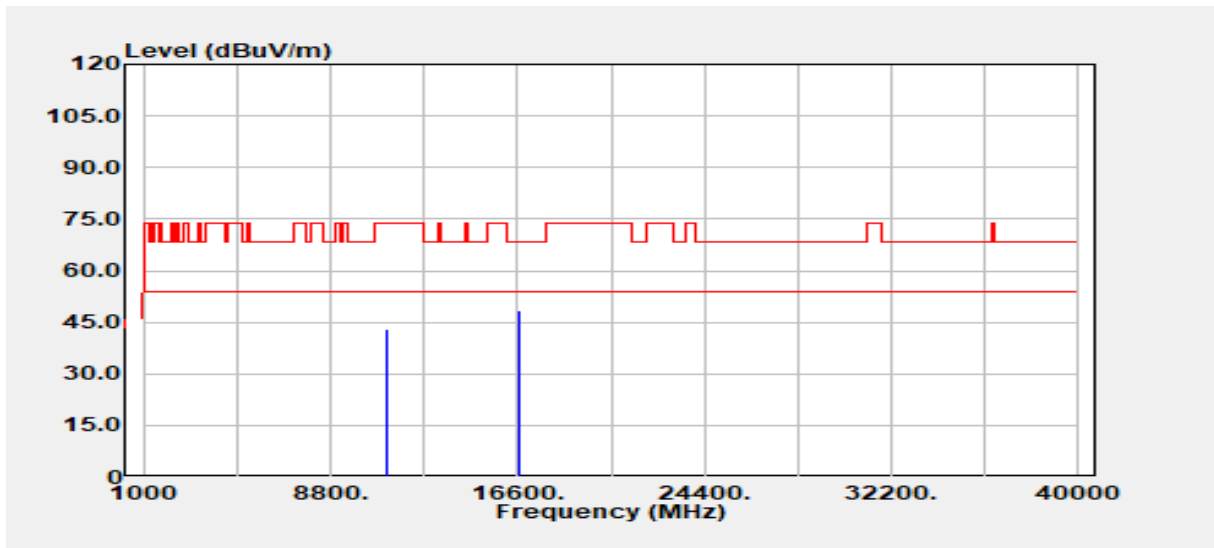


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11140.00	Peak	30.49	12.49	42.98	74.00	-31.02
11140.00	Average	23.74	12.49	36.23	54.00	-17.77
16710.00	Peak	27.80	20.67	48.47	68.20	-19.73
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

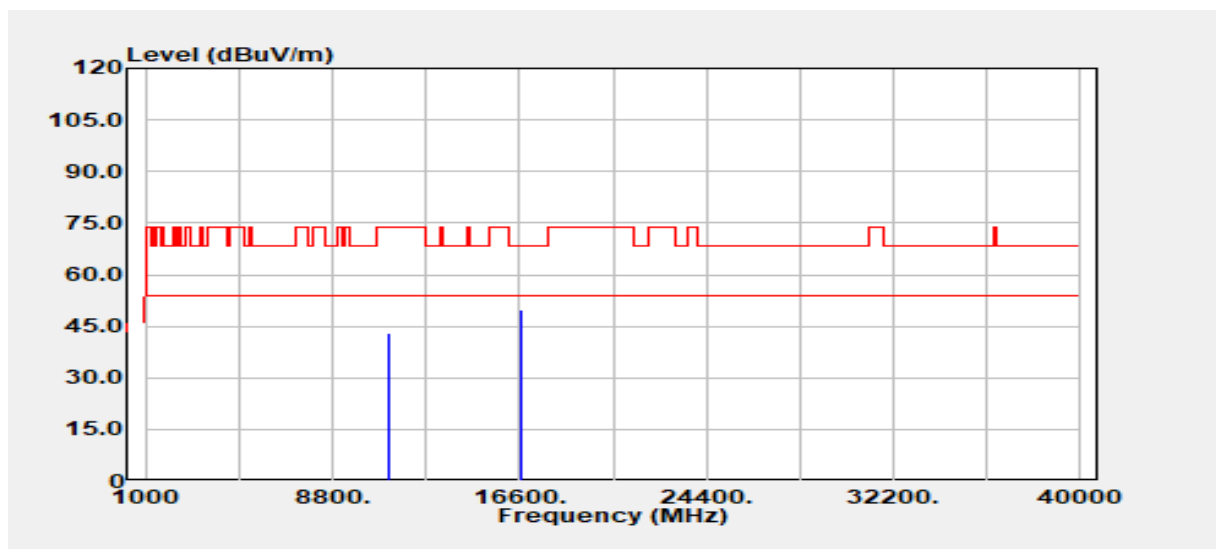

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11140.00	Peak	30.34	12.49	42.82	74.00	-31.18
11140.00	Average	23.68	12.49	36.17	54.00	-17.83
16710.00	Peak	29.23	20.67	49.90	68.20	-18.30
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(1) Chain 0:

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

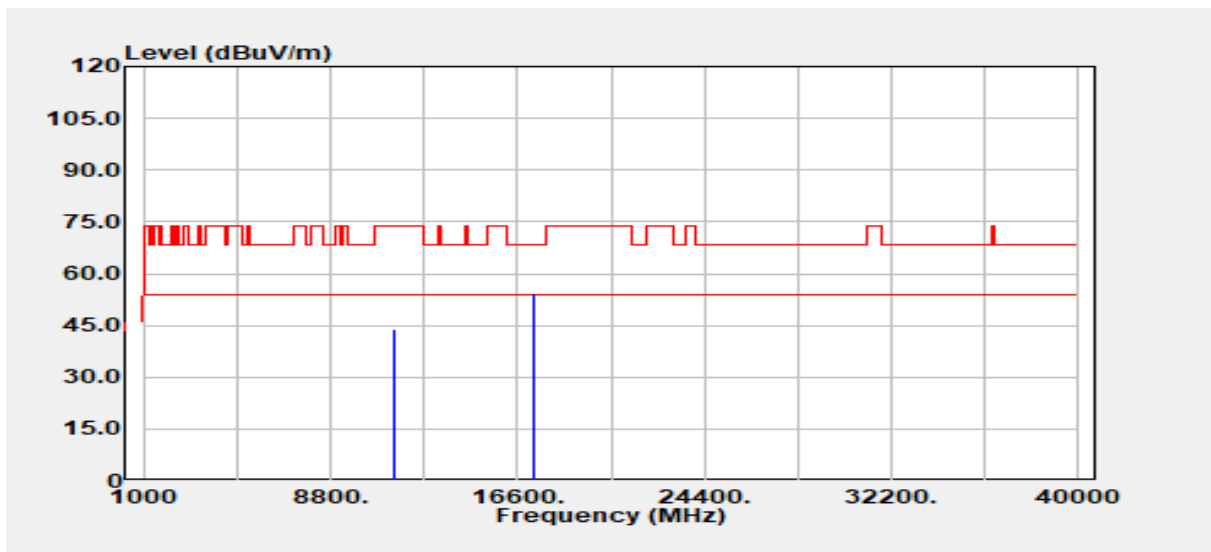


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	31.51	12.39	43.90	74.00	-30.10
11490.00	Average	27.27	12.39	39.66	54.00	-14.34
17235.00	Peak	28.33	26.10	54.43	68.20	-13.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

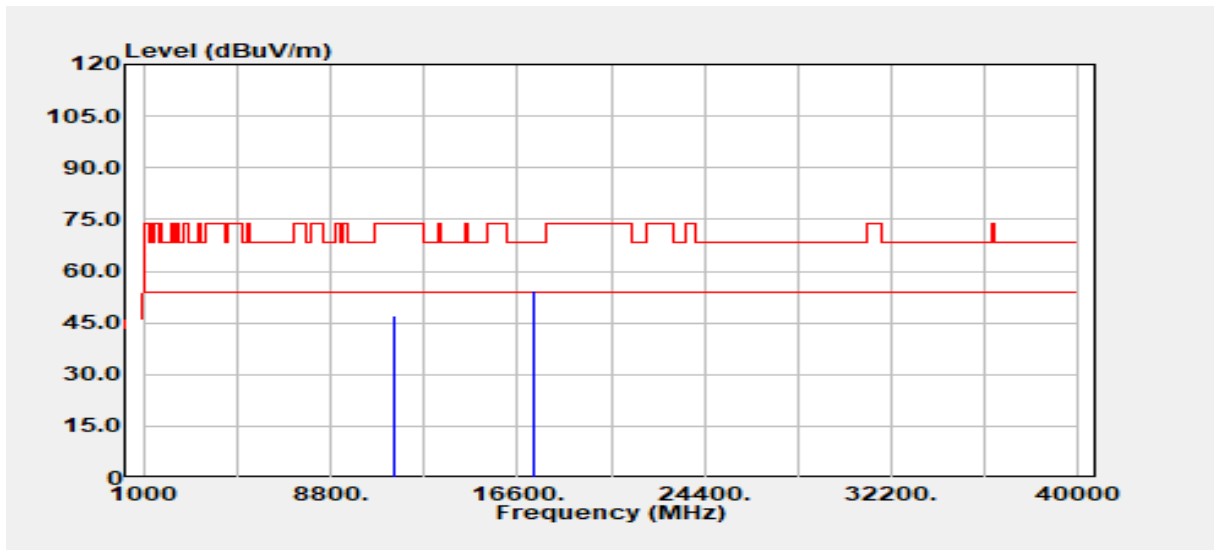


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	34.64	12.39	47.03	74.00	-26.97
11490.00	Average	30.34	12.39	42.73	54.00	-11.27
17235.00	Peak	28.10	26.10	54.20	68.20	-14.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

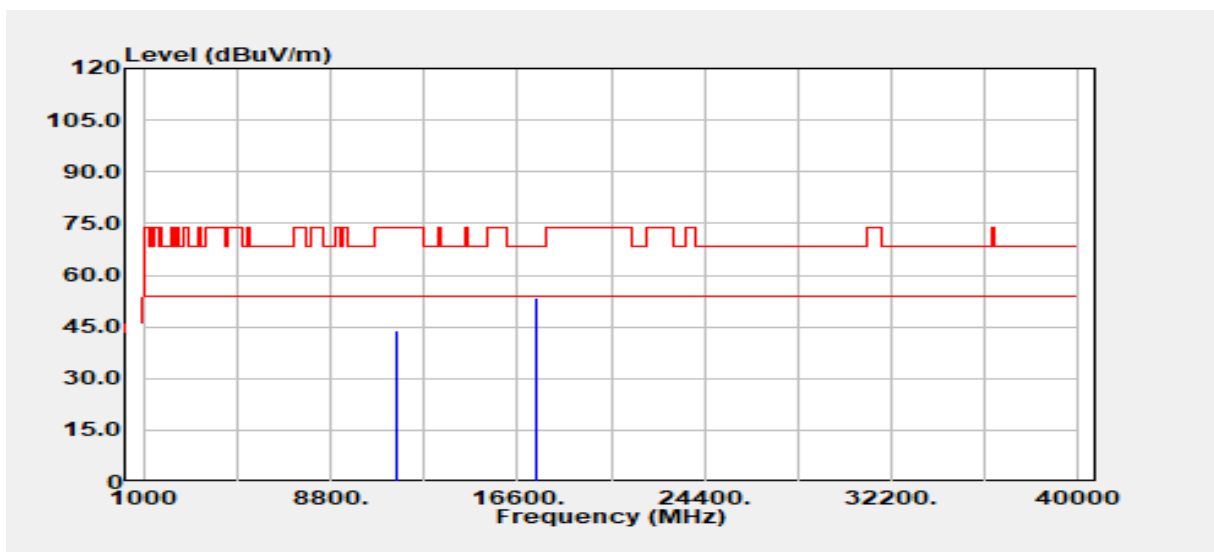


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	31.32	12.49	43.81	74.00	-30.19
11570.00	Average	25.50	12.49	37.99	54.00	-16.01
17355.00	Peak	28.11	25.47	53.57	68.20	-14.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

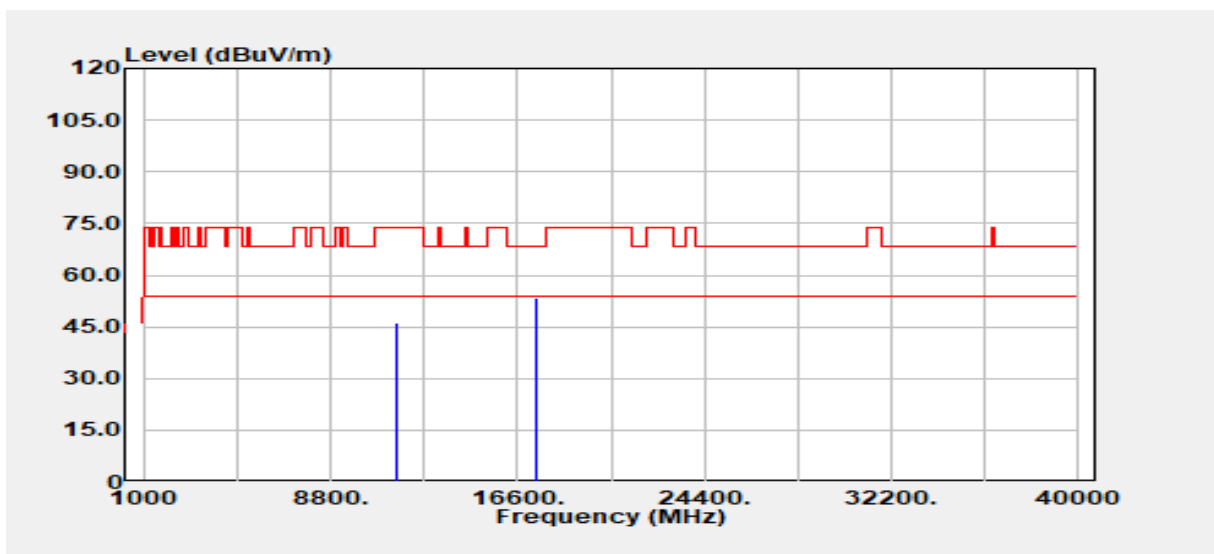


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	33.73	12.49	46.22	74.00	-27.78
11570.00	Average	29.28	12.49	41.77	54.00	-12.23
17355.00	Peak	27.83	25.47	53.29	68.20	-14.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

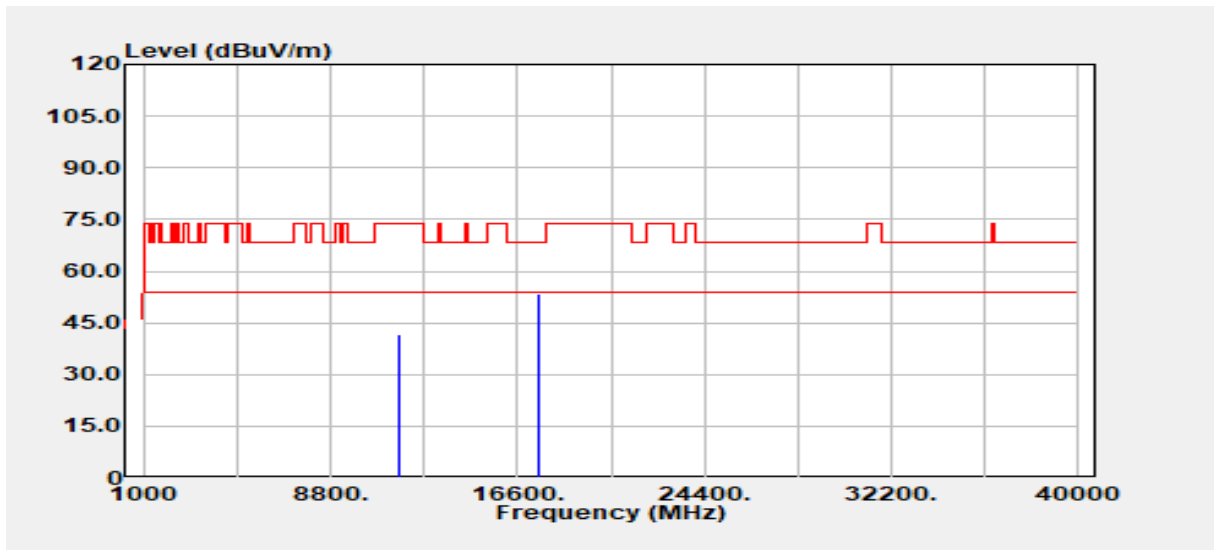


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	29.15	12.43	41.58	74.00	-32.42
11650.00	Average	24.88	12.43	37.31	54.00	-16.69
17475.00	Peak	28.25	25.06	53.31	68.20	-14.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

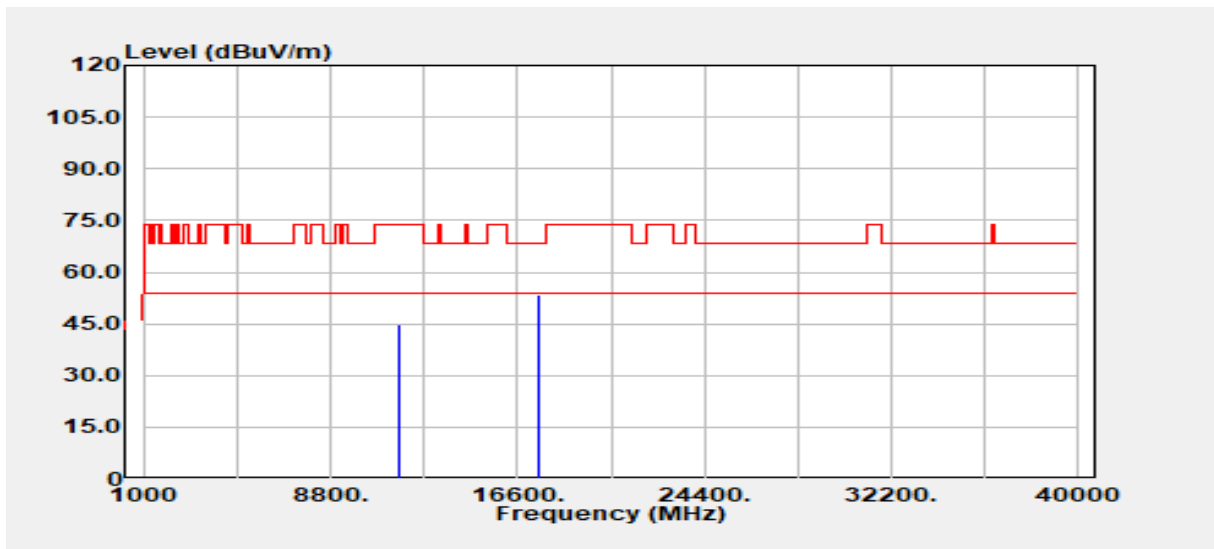

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	32.41	12.43	44.83	74.00	-29.17
11650.00	Average	28.35	12.43	40.78	54.00	-13.22
17475.00	Peak	28.51	25.06	53.57	68.20	-14.63
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(2) Chain 1:

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

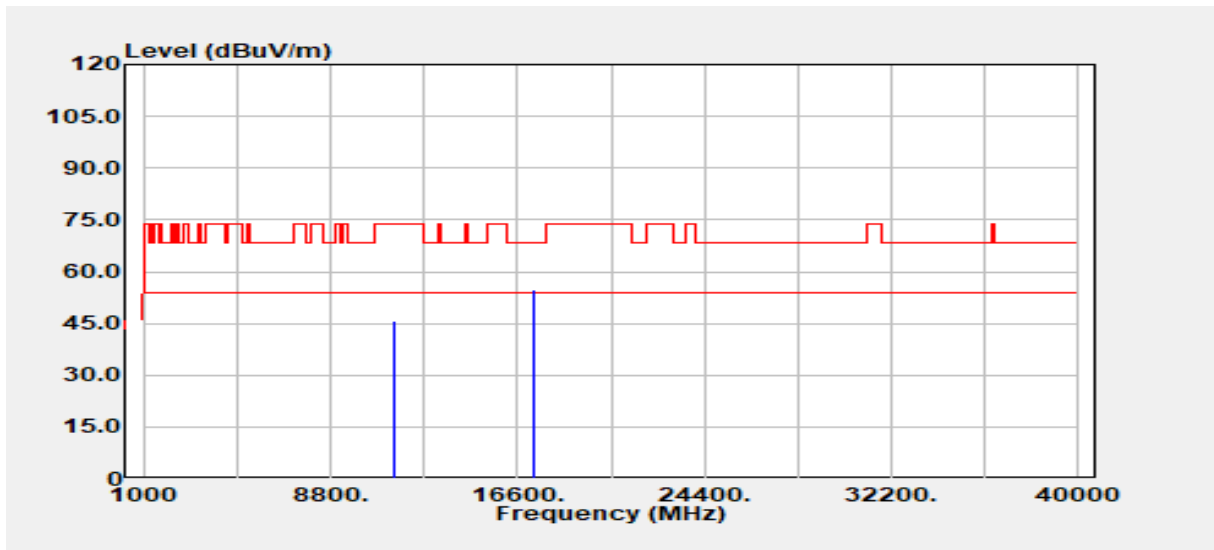


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	33.41	12.39	45.80	74.00	-28.20
11490.00	Average	28.62	12.39	41.01	54.00	-12.99
17235.00	Peak	28.73	26.10	54.84	68.20	-13.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

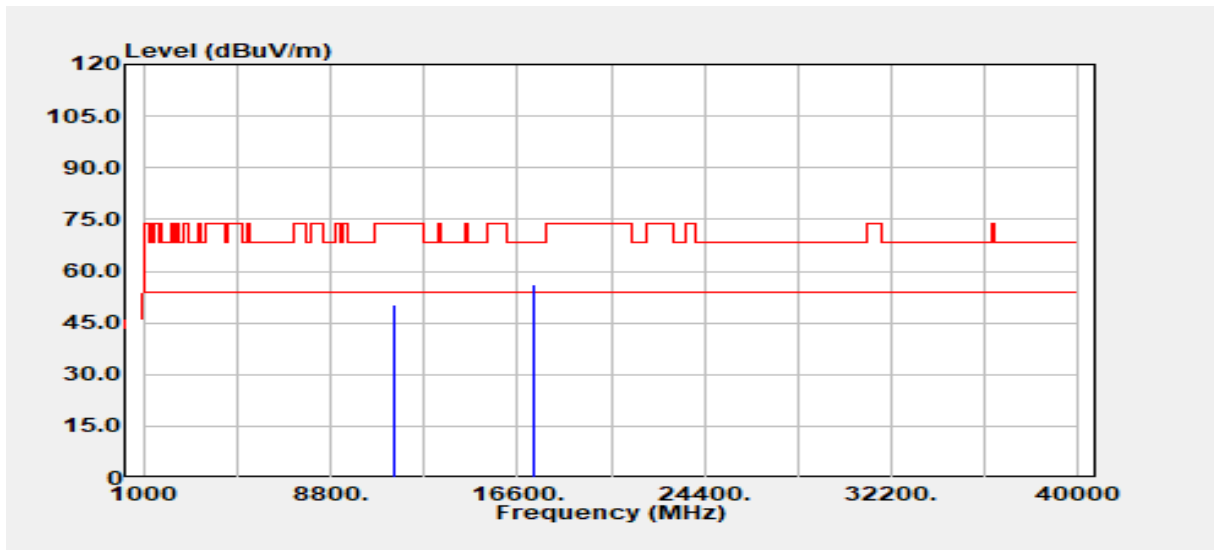


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	37.73	12.39	50.12	74.00	-23.88
11490.00	Average	32.03	12.39	44.42	54.00	-9.58
17235.00	Peak	29.83	26.10	55.94	68.20	-12.26
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

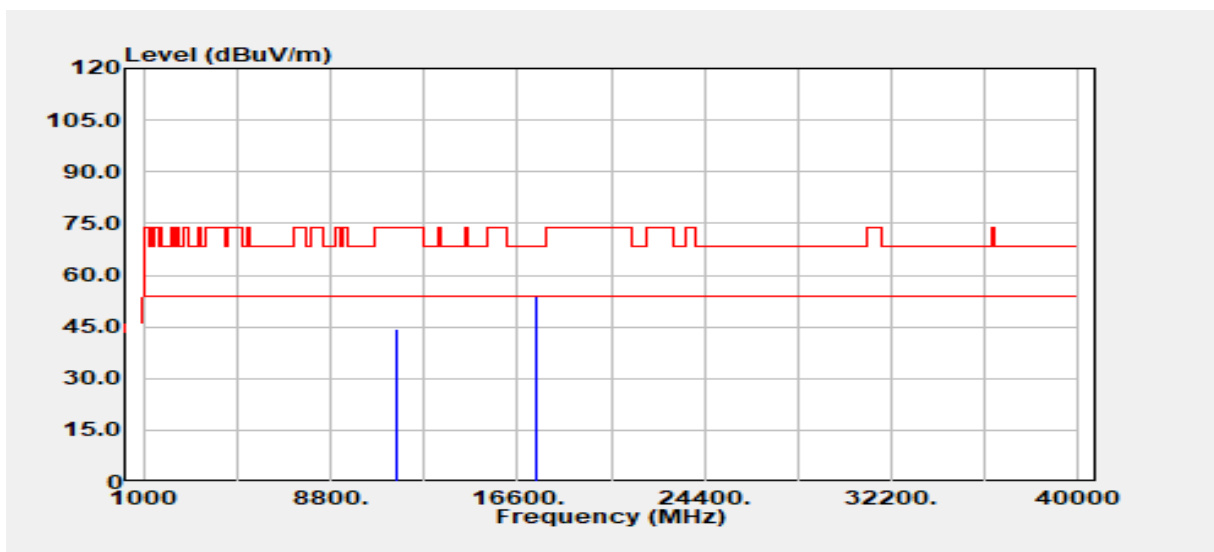


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	32.03	12.49	44.52	74.00	-29.48
11570.00	Average	27.95	12.49	40.45	54.00	-13.55
17355.00	Peak	28.46	25.47	53.93	68.20	-14.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.4(°C) / 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

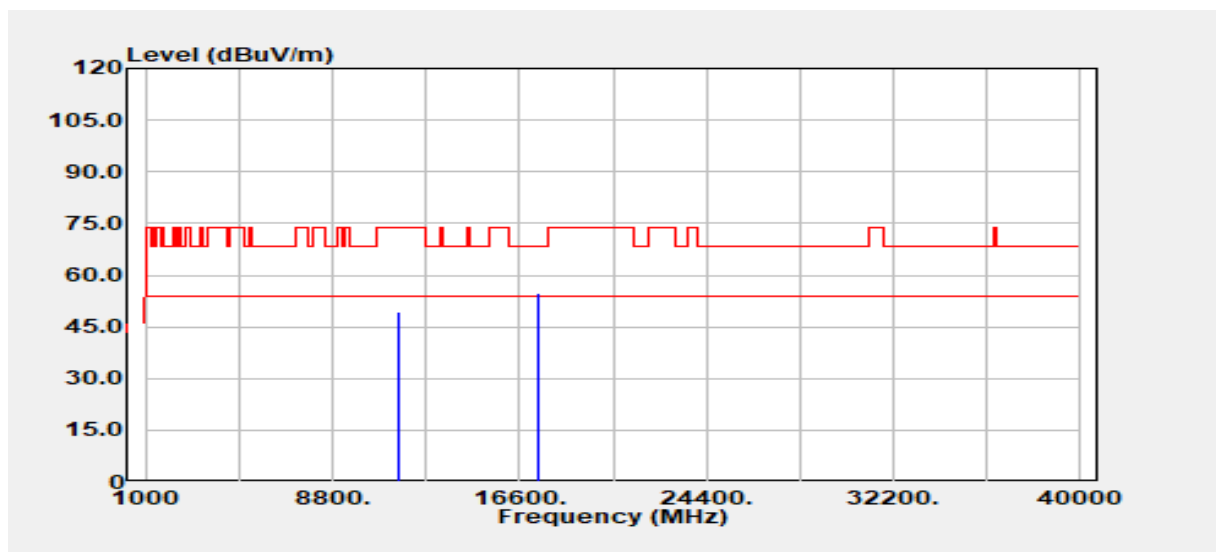


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	37.07	12.49	49.56	74.00	-24.44
11570.00	Average	32.50	12.49	44.99	54.00	-9.01
17355.00	Peak	29.33	25.47	54.79	68.20	-13.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

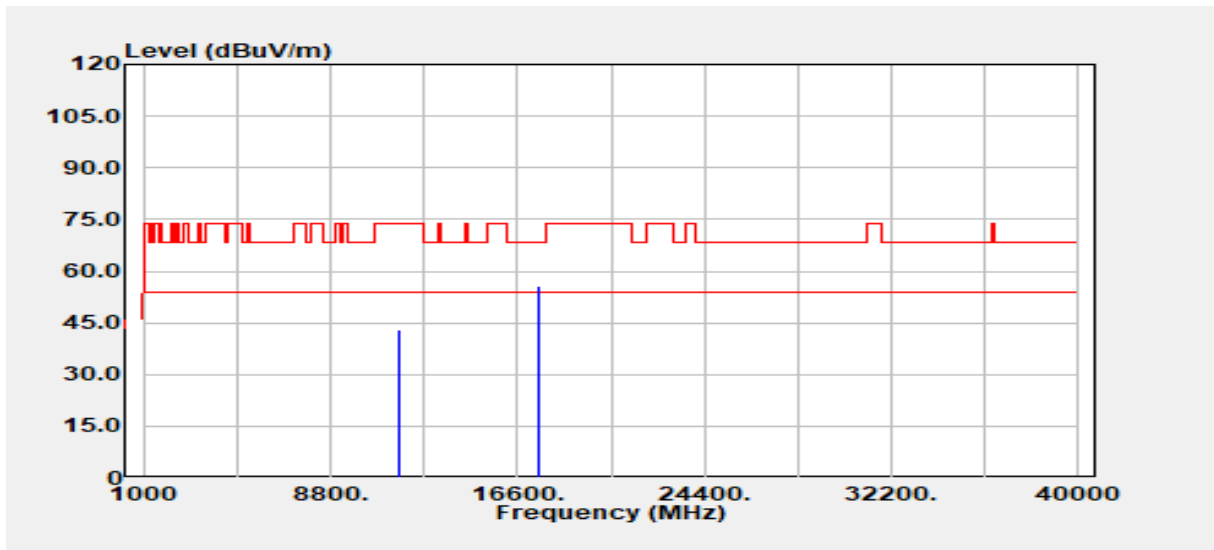


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11650.00	Peak	30.67	12.43	43.10	74.00	-30.90
11650.00	Average	26.53	12.43	38.96	54.00	-15.04
17475.00	Peak	30.49	25.06	55.55	68.20	-12.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

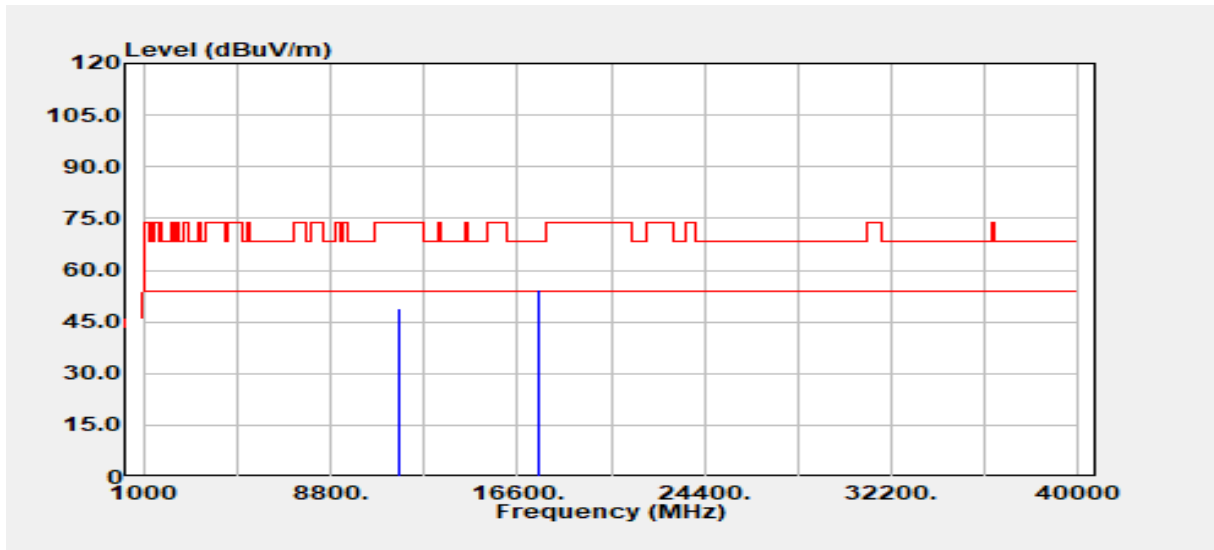

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	36.47	12.43	48.90	74.00	-25.10
11650.00	Average	31.03	12.43	43.46	54.00	-10.54
17475.00	Peak	29.23	25.06	54.29	68.20	-13.91
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(3) Chain 2:

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

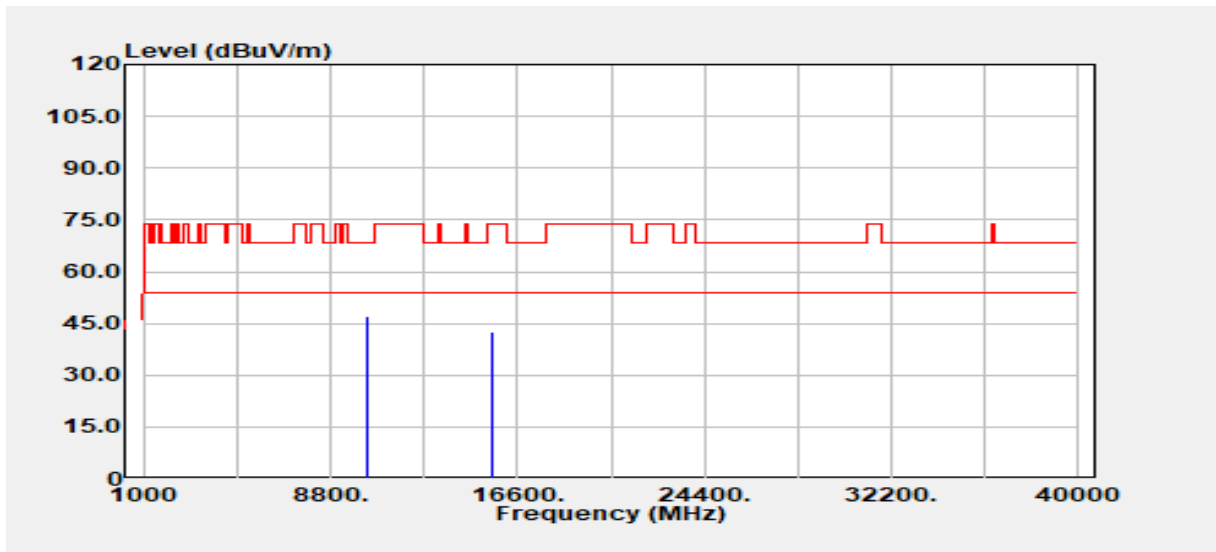


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	35.67	11.26	46.94	68.20	-21.26
15540.00	Peak	30.20	12.38	42.58	74.00	-31.42
15540.00	Average	26.19	12.38	38.57	54.00	-15.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

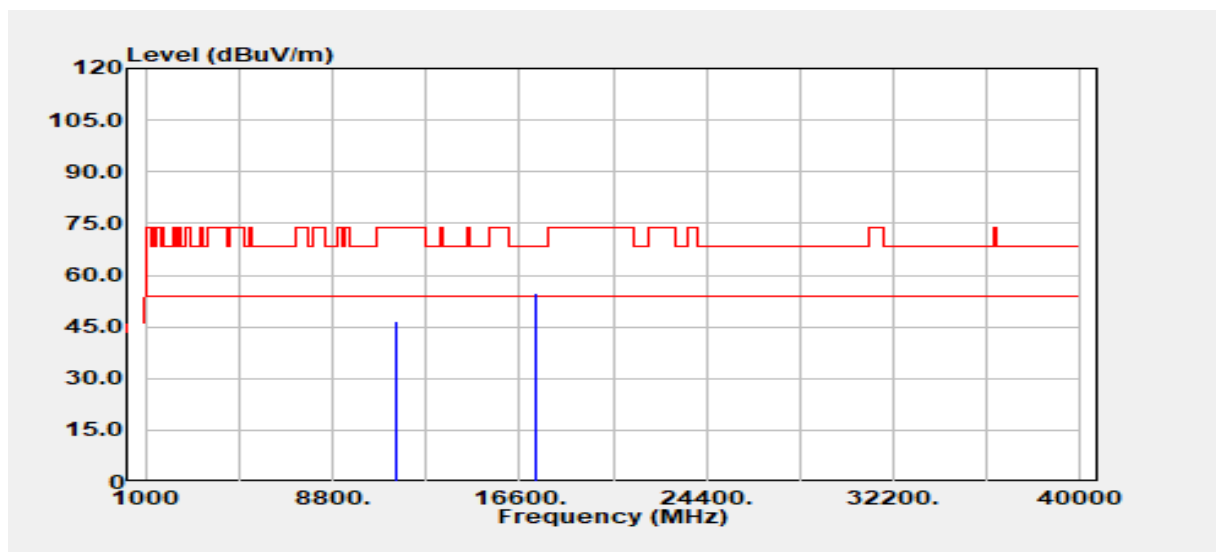


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	34.03	12.39	46.42	74.00	-27.58
11490.00	Average	29.38	12.39	41.77	54.00	-12.23
17235.00	Peak	28.50	26.10	54.60	68.20	-13.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonics	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

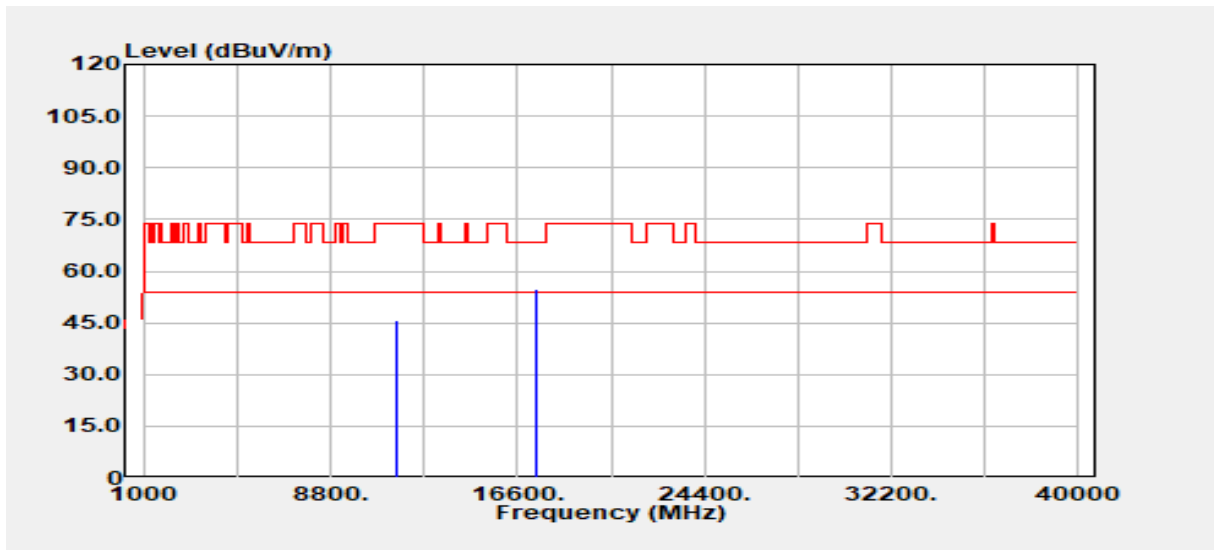


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	33.29	12.49	45.78	74.00	-28.22
11570.00	Average	30.22	12.49	42.71	54.00	-11.29
17355.00	Peak	29.41	25.47	54.88	68.20	-13.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.4(°C) / 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

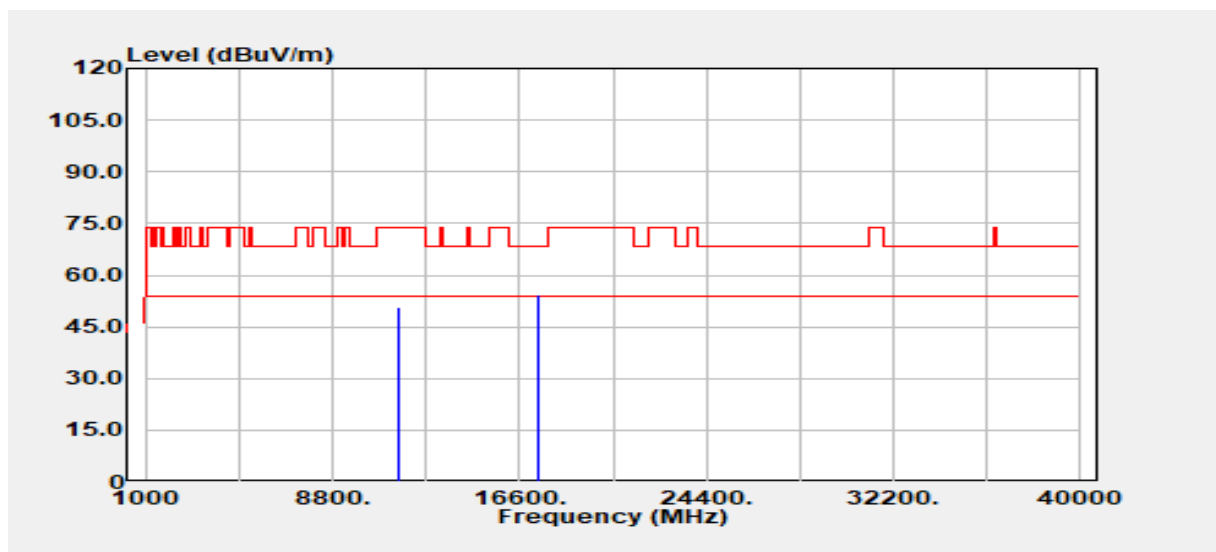


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	38.07	12.49	50.56	74.00	-23.44
11570.00	Average	34.06	12.49	46.56	54.00	-7.44
17355.00	Peak	29.05	25.47	54.52	68.20	-13.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

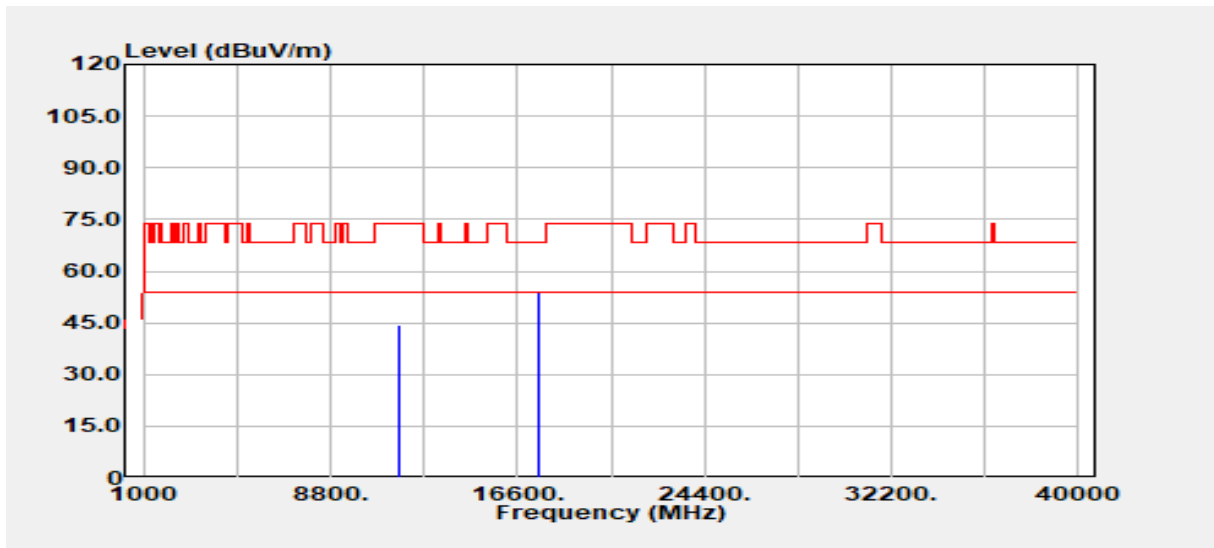


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	32.01	12.43	44.43	74.00	-29.57
11650.00	Average	28.56	12.43	40.99	54.00	-13.01
17475.00	Peak	28.72	25.06	53.78	68.20	-14.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.4(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 21, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

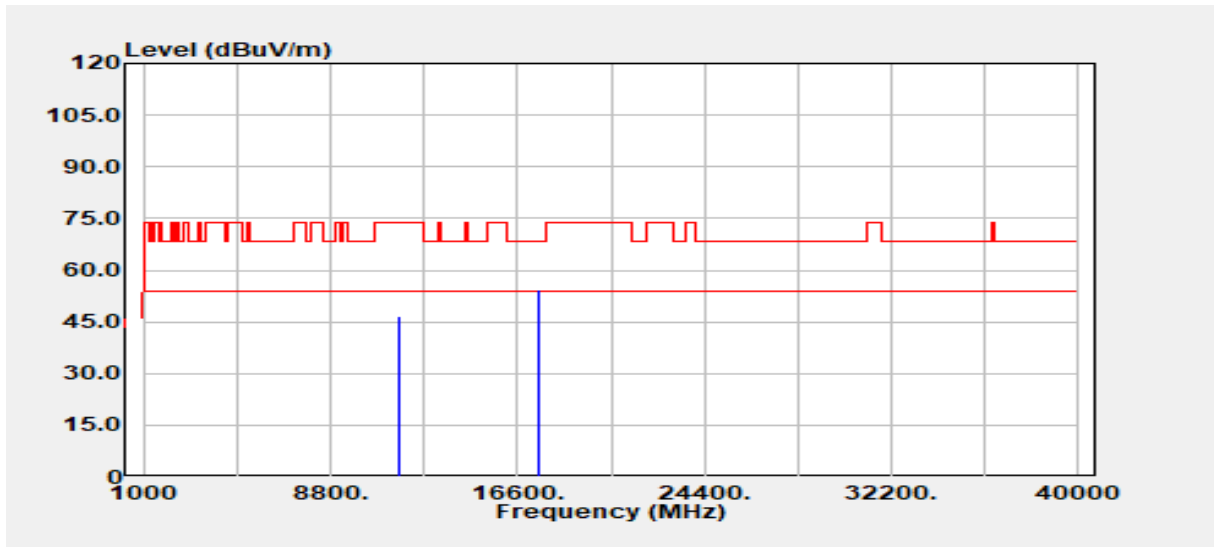

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	34.19	12.43	46.62	74.00	-27.38
11650.00	Average	30.92	12.43	43.34	54.00	-10.66
17475.00	Peak	29.34	25.06	54.40	68.20	-13.80
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(4) MIMO:

Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

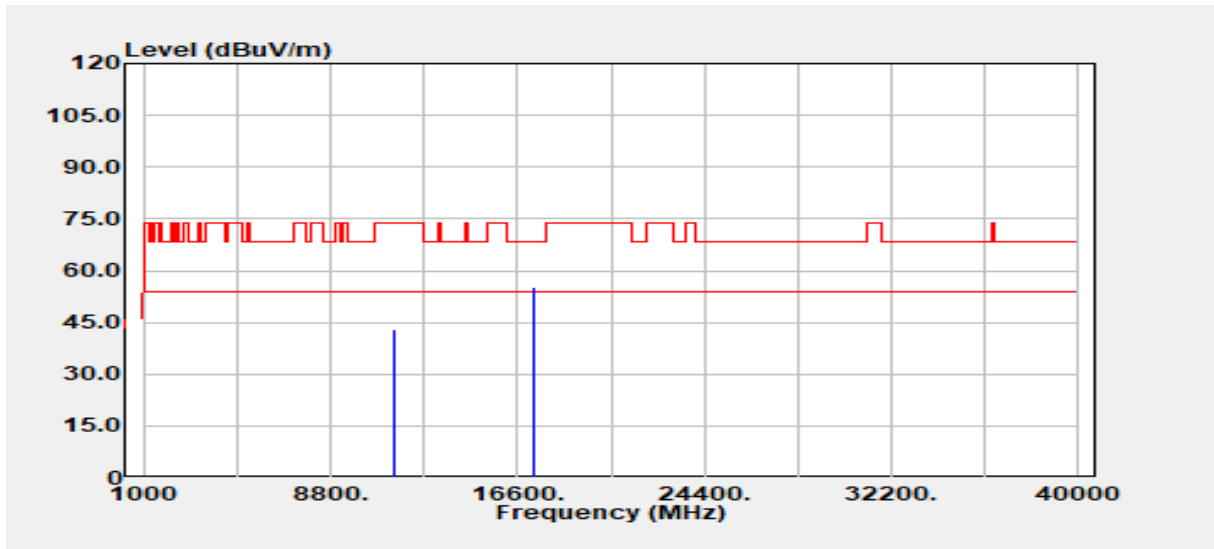


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	30.68	12.39	43.07	74.00	-30.93
11490.00	Average	26.59	12.39	38.98	54.00	-15.02
17235.00	Peak	29.28	26.10	55.39	68.20	-12.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

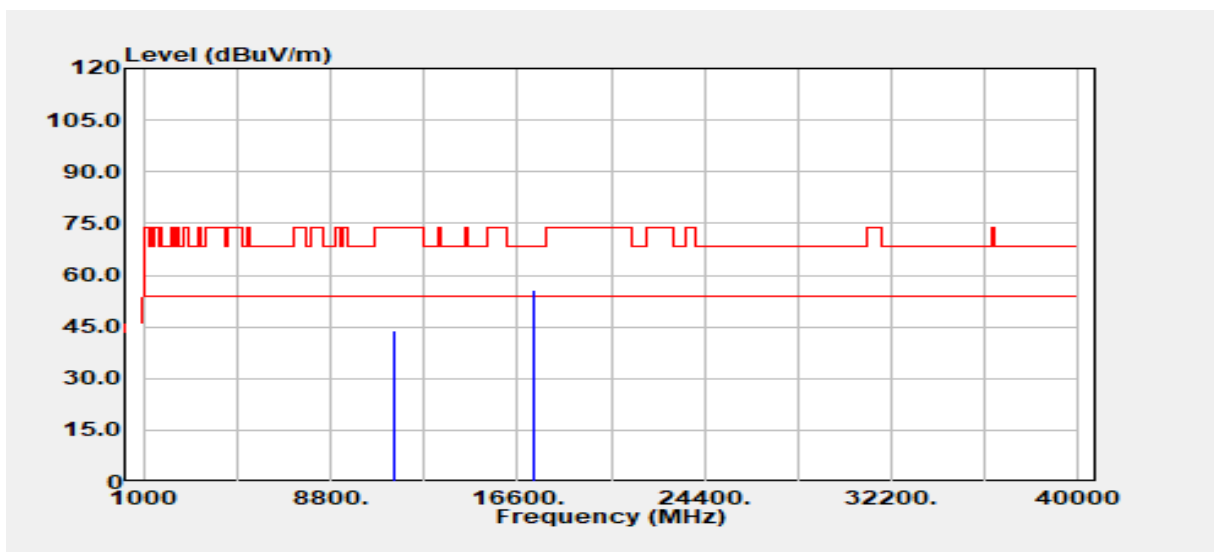


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	31.60	12.39	43.99	74.00	-30.01
11490.00	Average	27.32	12.39	39.71	54.00	-14.29
17235.00	Peak	29.68	26.10	55.79	68.20	-12.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5785 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

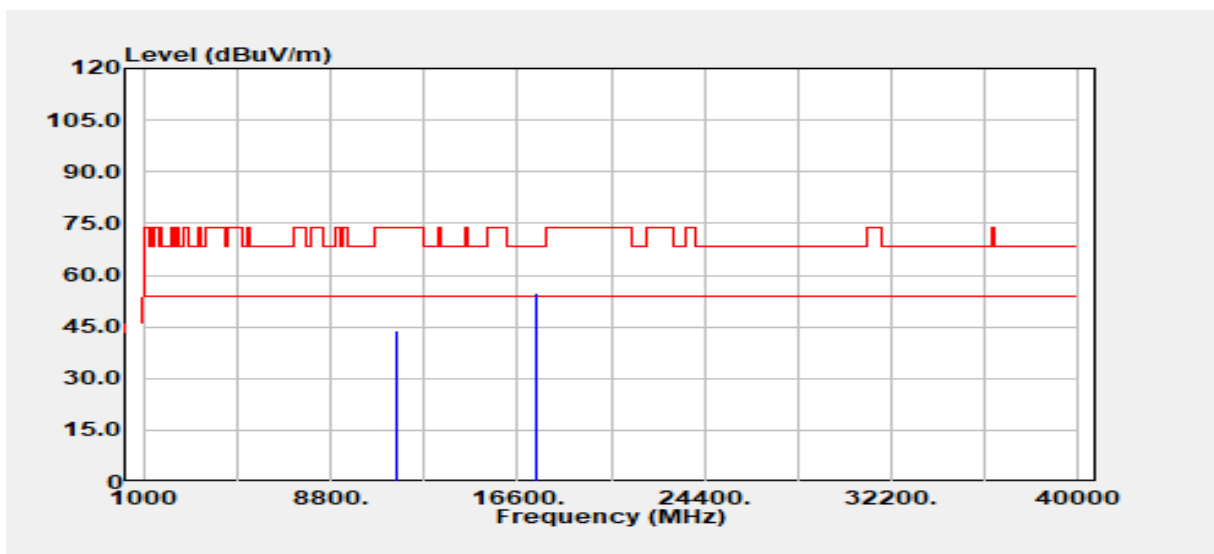


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	31.49	12.49	43.98	74.00	-30.02
11570.00	Average	26.09	12.49	38.58	54.00	-15.42
17355.00	Peak	29.32	25.47	54.79	68.20	-13.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5785 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

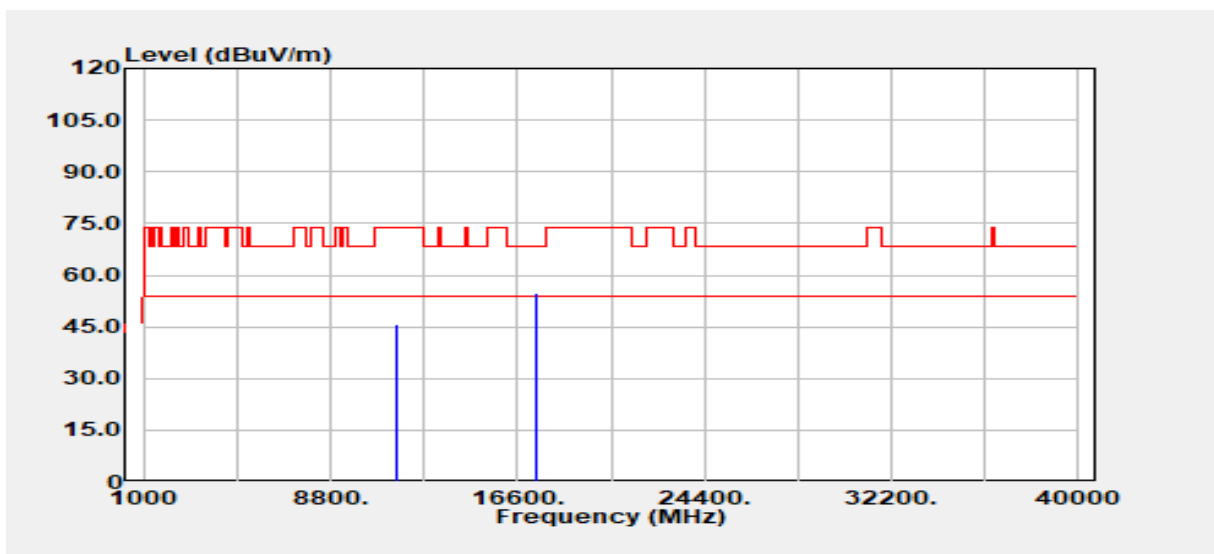


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	33.39	12.49	45.88	74.00	-28.12
11570.00	Average	28.61	12.49	41.10	54.00	-12.90
17355.00	Peak	29.36	25.47	54.83	68.20	-13.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

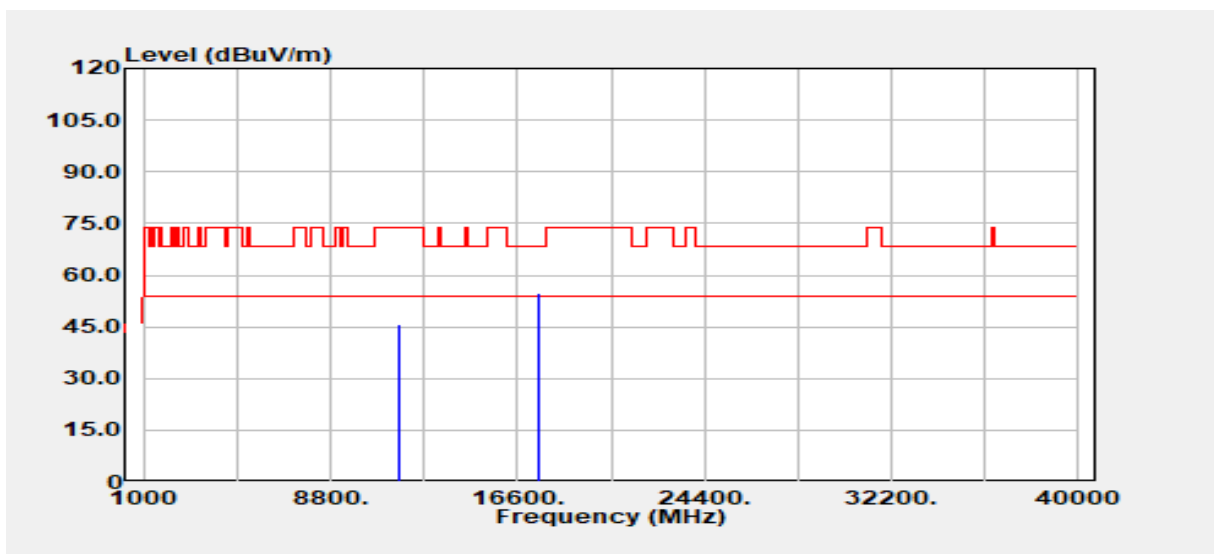


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	33.26	12.43	45.68	74.00	-28.32
11650.00	Average	26.31	12.43	38.74	54.00	-15.26
17475.00	Peak	29.56	25.06	54.62	68.20	-13.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5825 MHz	Temp/Hum	24.6(°C) / 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

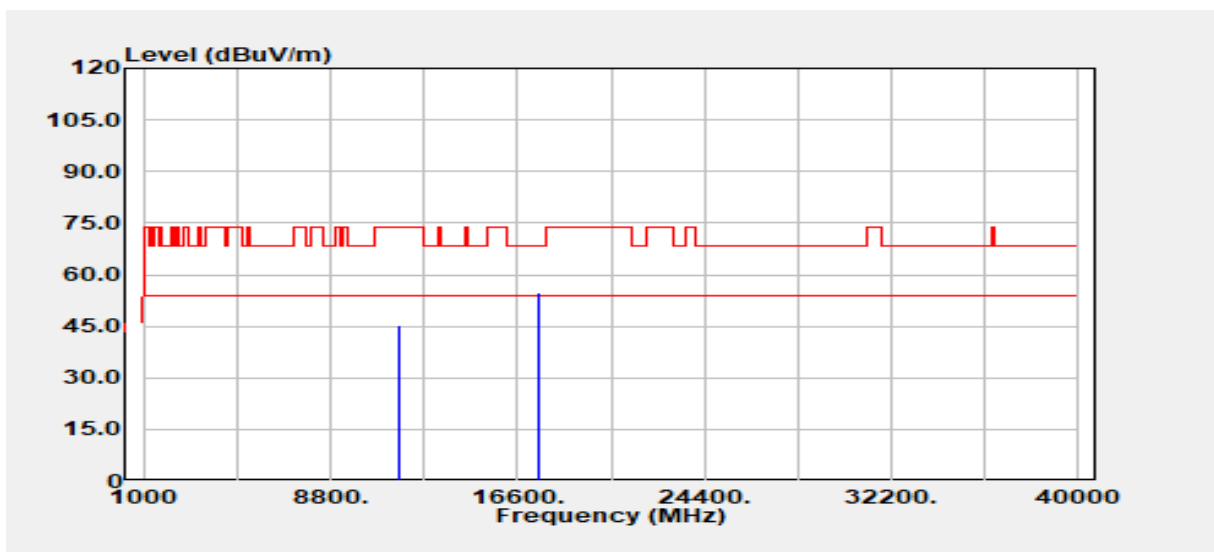


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	32.77	12.43	45.20	74.00	-28.80
11650.00	Average	28.39	12.43	40.81	54.00	-13.19
17475.00	Peak	29.61	25.06	54.67	68.20	-13.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

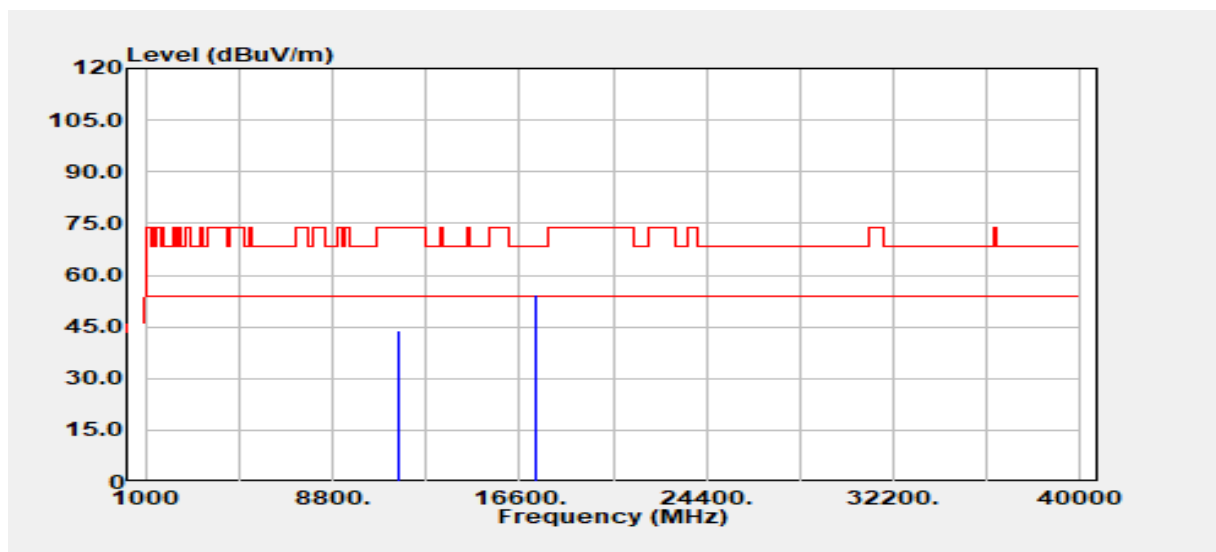


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11510.00	Peak	31.58	12.43	44.01	74.00	-29.99
11510.00	Average	23.55	12.43	35.98	54.00	-18.02
17265.00	Peak	28.09	26.14	54.23	68.20	-13.97
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5755 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

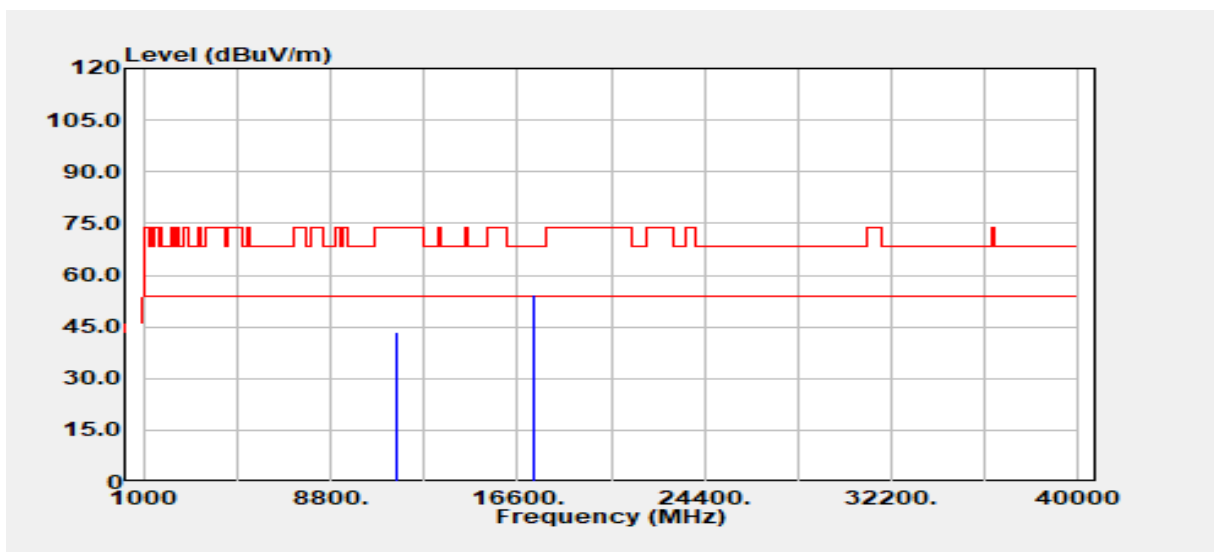


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11510.00	Peak	30.96	12.43	43.39	74.00	-30.61
11510.00	Average	24.10	12.43	36.53	54.00	-17.47
17265.00	Peak	28.01	26.14	54.15	68.20	-14.05
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

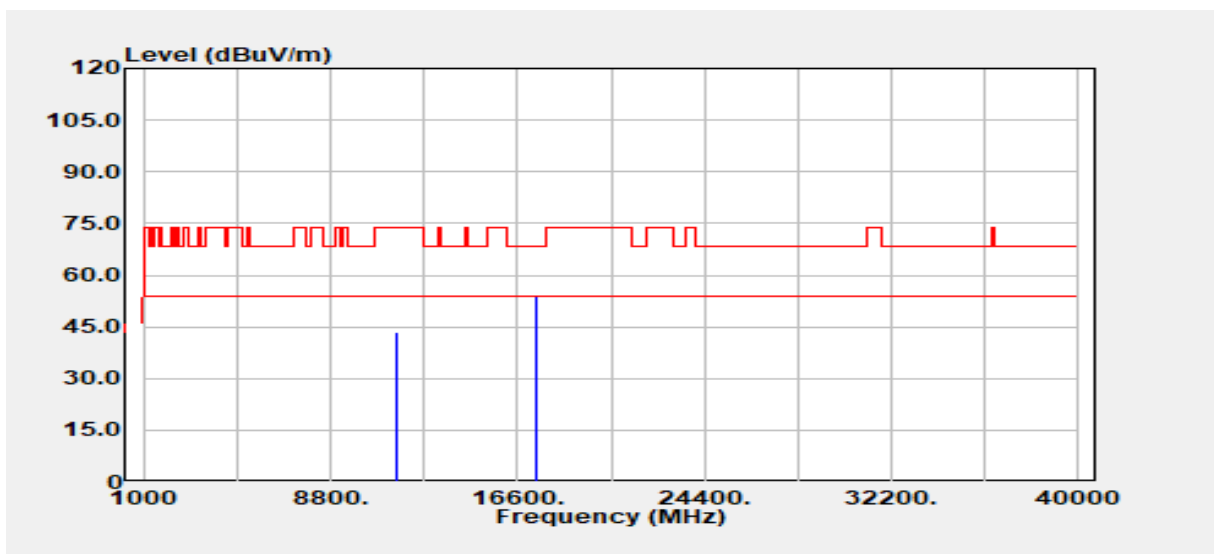


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	31.13	12.48	43.61	74.00	-30.39
11590.00	Average	23.36	12.48	35.84	54.00	-18.16
17385.00	Peak	28.61	25.27	53.88	68.20	-14.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5795 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

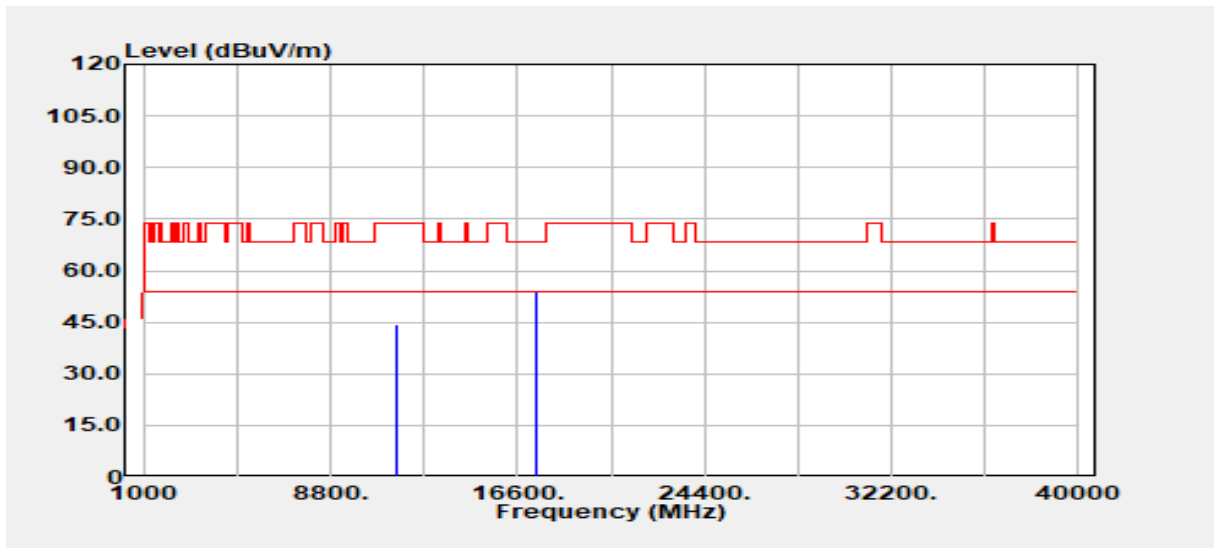


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11590.00	Peak	31.77	12.48	44.25	74.00	-29.75
11590.00	Average	25.35	12.48	37.83	54.00	-16.17
17385.00	Peak	28.84	25.27	54.11	68.20	-14.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

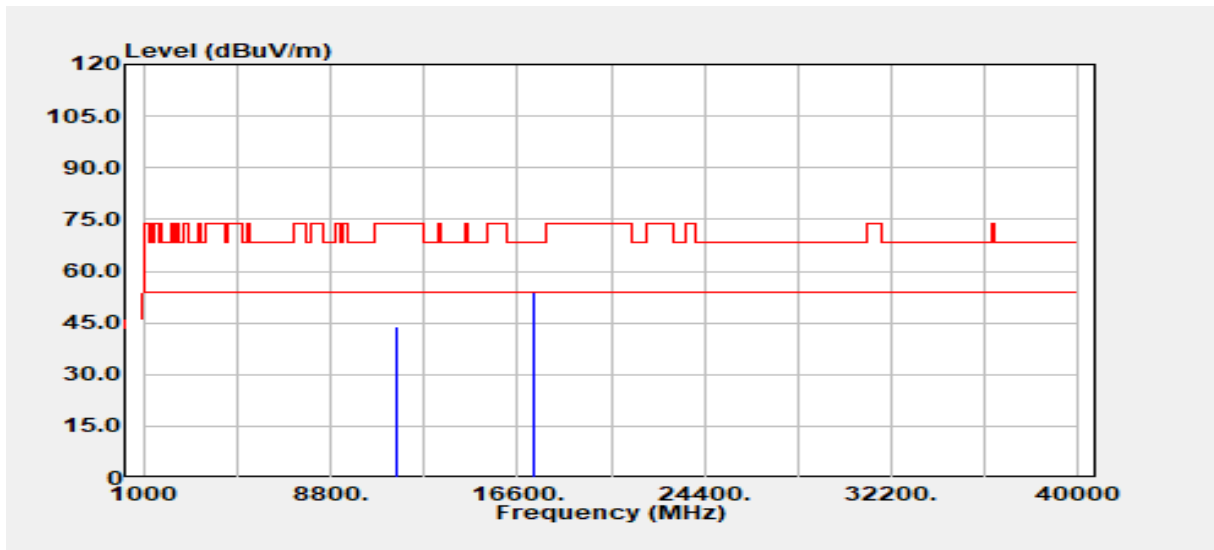


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11550.00	Peak	31.34	12.51	43.84	74.00	-30.16
11550.00	Average	23.93	12.51	36.43	54.00	-17.57
17325.00	Peak	28.14	25.79	53.93	68.20	-14.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

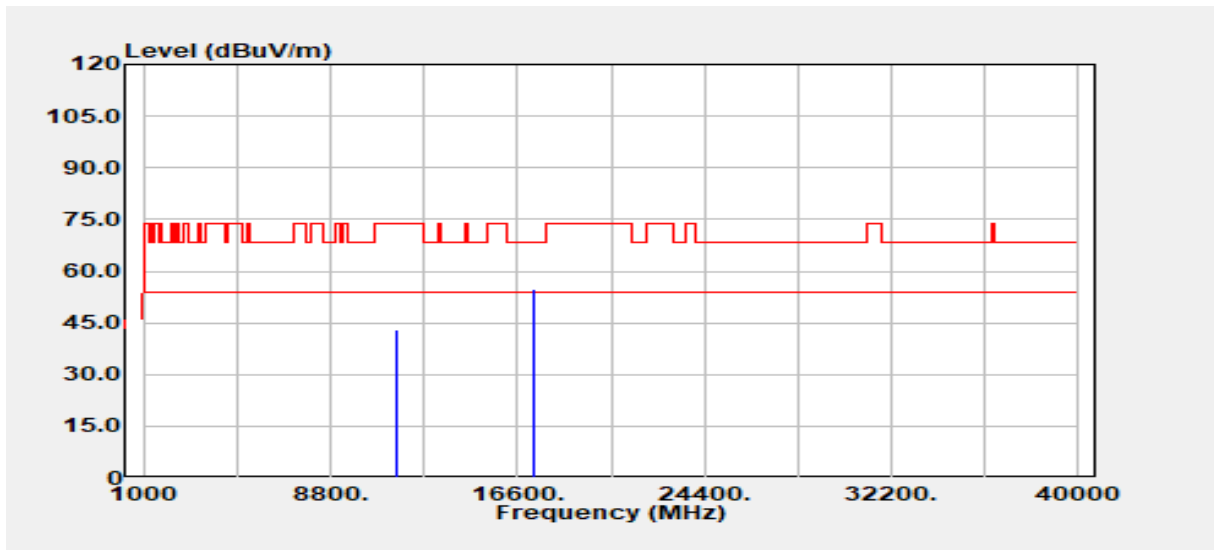


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	30.72	12.51	43.23	74.00	-30.77
11550.00	Average	24.03	12.51	36.54	54.00	-17.46
17325.00	Peak	28.85	25.79	54.64	68.20	-13.56
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

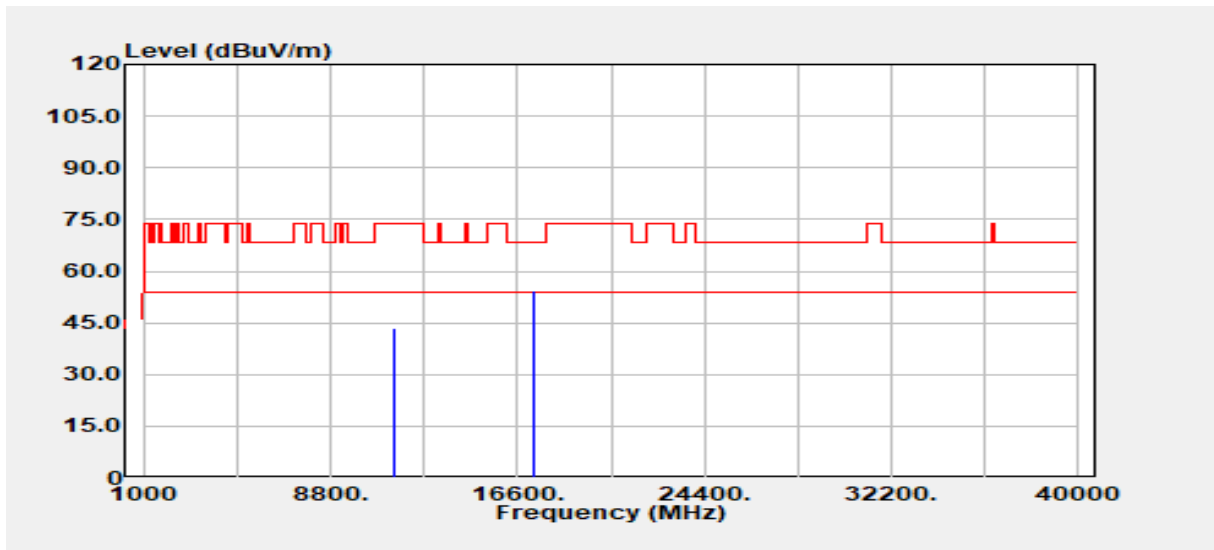


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	31.06	12.39	43.45	74.00	-30.55
11490.00	Average	27.23	12.39	39.62	54.00	-14.38
17235.00	Peak	28.41	26.10	54.51	68.20	-13.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5745 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

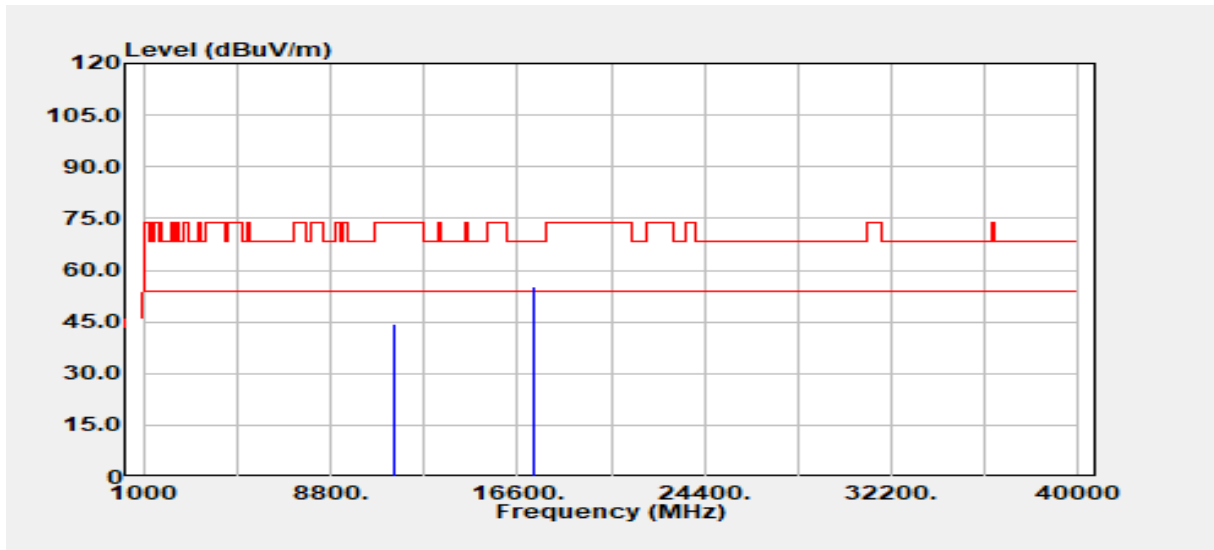


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	31.83	12.39	44.22	74.00	-29.78
11490.00	Average	26.16	12.39	38.55	54.00	-15.45
17235.00	Peak	28.92	26.10	55.03	68.20	-13.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5785 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

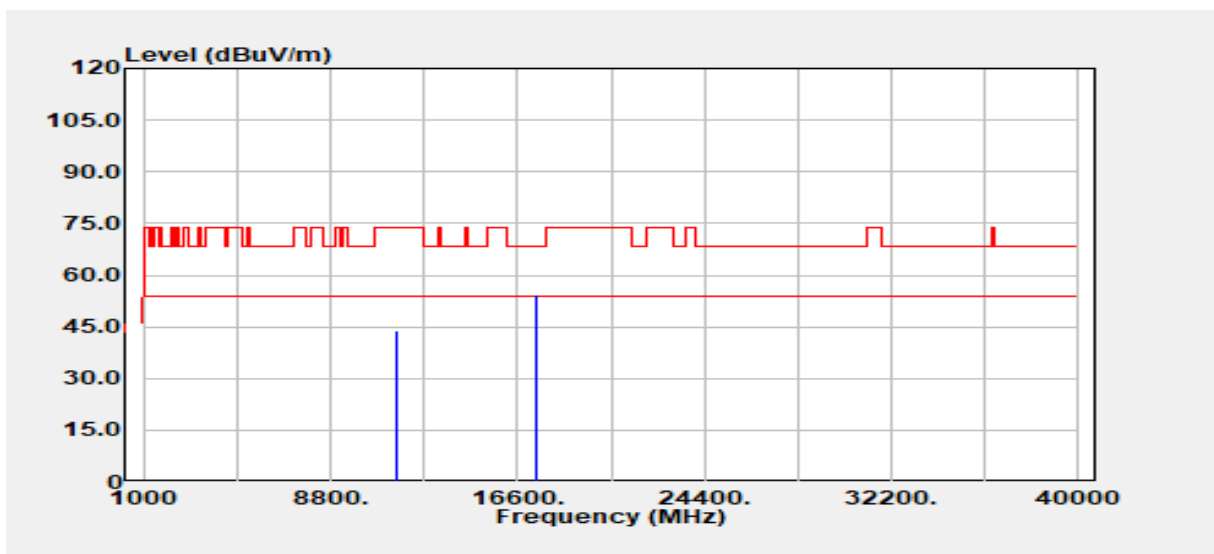


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11570.00	Peak	31.24	12.49	43.73	74.00	-30.27
11570.00	Average	25.46	12.49	37.95	54.00	-16.05
17355.00	Peak	28.79	25.47	54.26	68.20	-13.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5785 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

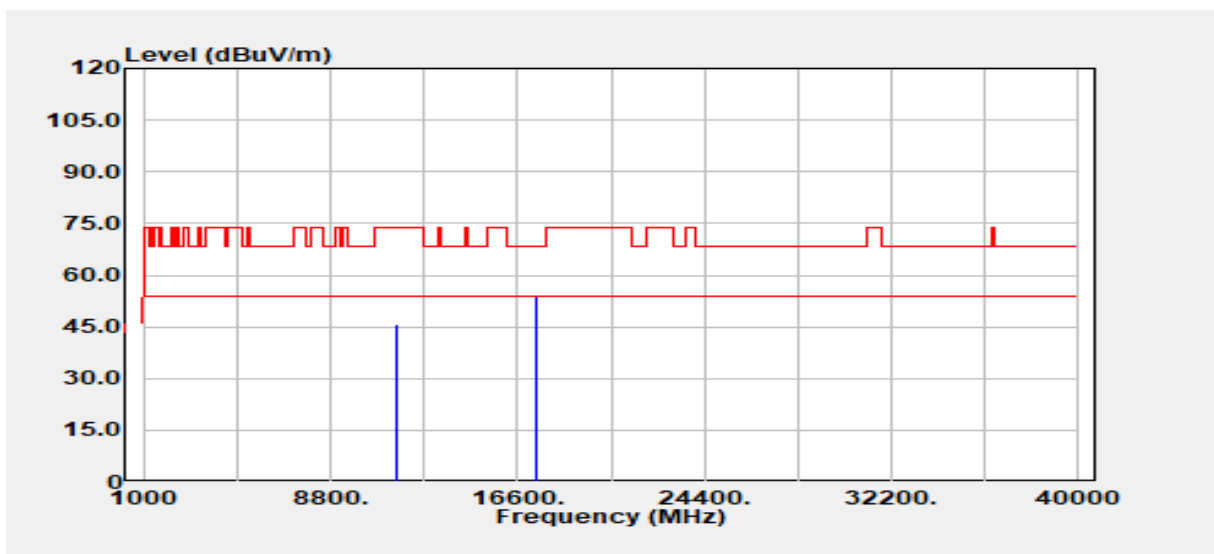


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11570.00	Peak	33.46	12.49	45.95	74.00	-28.05
11570.00	Average	28.96	12.49	41.45	54.00	-12.55
17355.00	Peak	28.45	25.47	53.92	68.20	-14.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

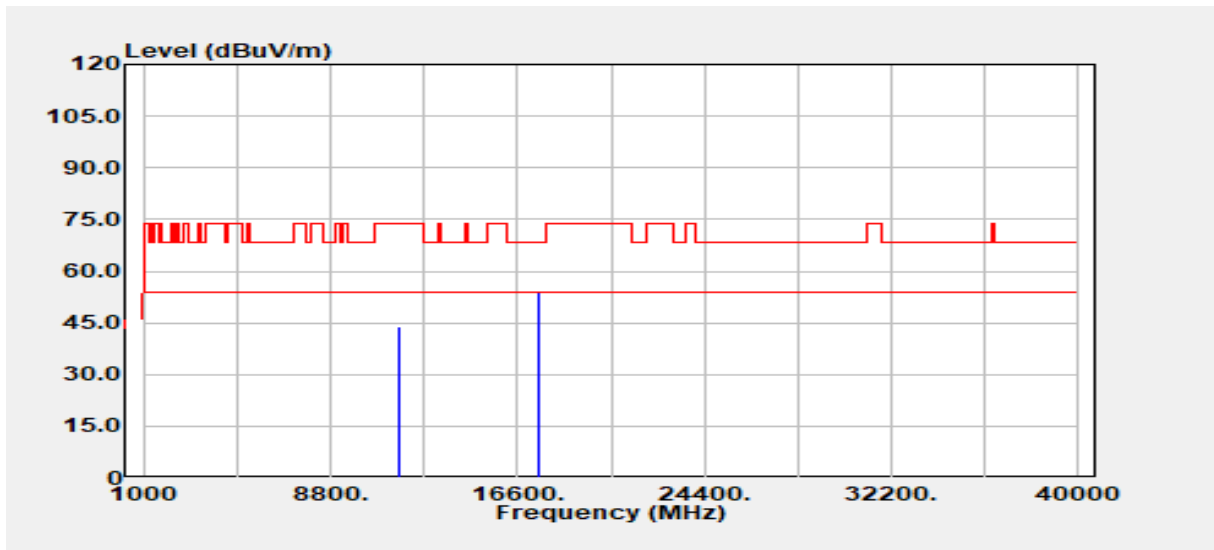


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	31.54	12.43	43.96	74.00	-30.04
11650.00	Average	26.06	12.43	38.48	54.00	-15.52
17475.00	Peak	28.72	25.06	53.78	68.20	-14.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5825 MHz	Temp/Hum	24.6(°C)/ 57%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

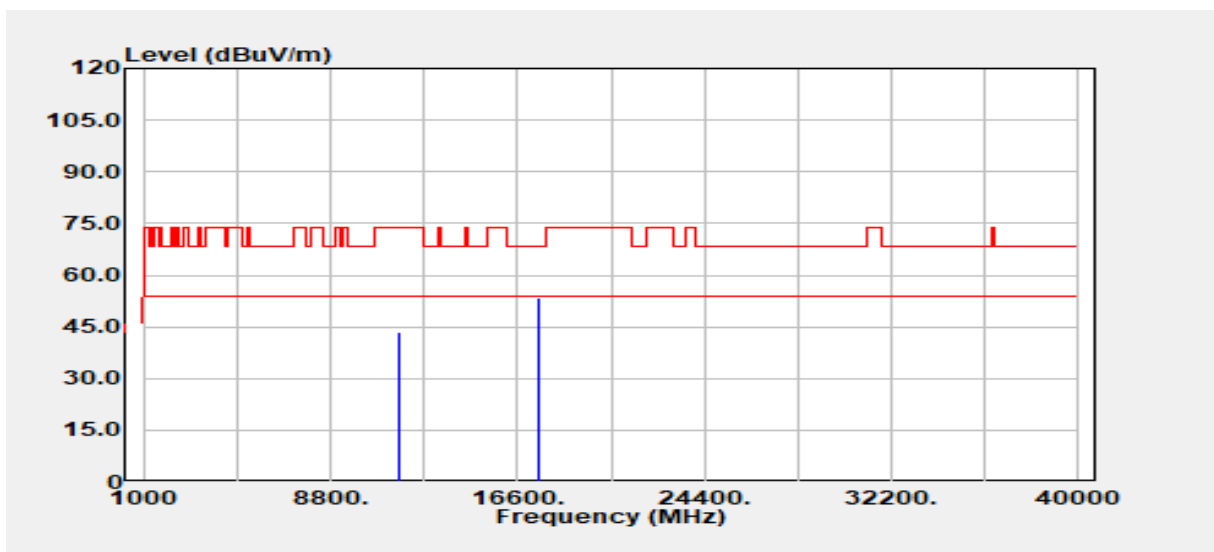


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11650.00	Peak	31.20	12.43	43.63	74.00	-30.37
11650.00	Average	27.19	12.43	39.61	54.00	-14.39
17475.00	Peak	28.47	25.06	53.53	68.20	-14.67
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

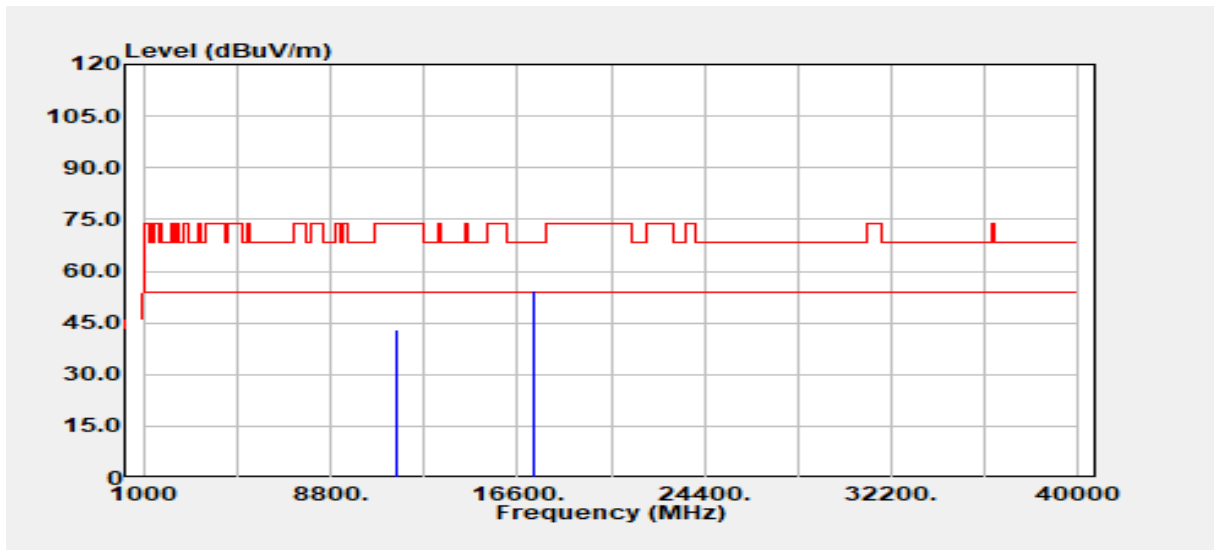


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	30.79	12.43	43.22	74.00	-30.78
11510.00	Average	23.77	12.43	36.20	54.00	-17.80
17265.00	Peak	28.19	26.14	54.33	68.20	-13.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5755 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

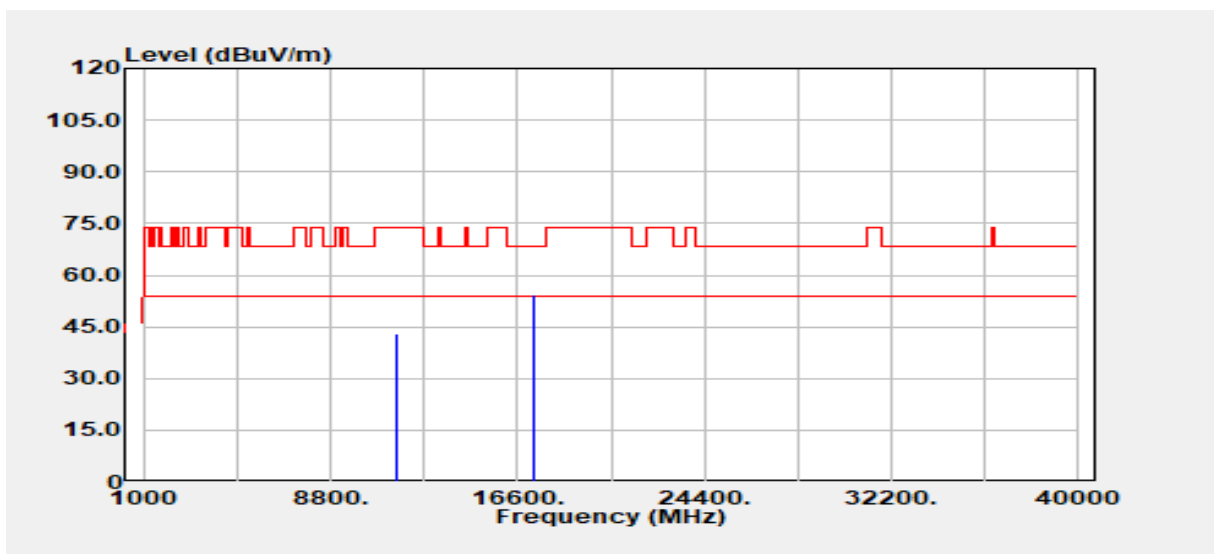


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11510.00	Peak	30.55	12.43	42.98	74.00	-31.02
11510.00	Average	24.88	12.43	37.31	54.00	-16.69
17265.00	Peak	28.02	26.14	54.16	68.20	-14.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

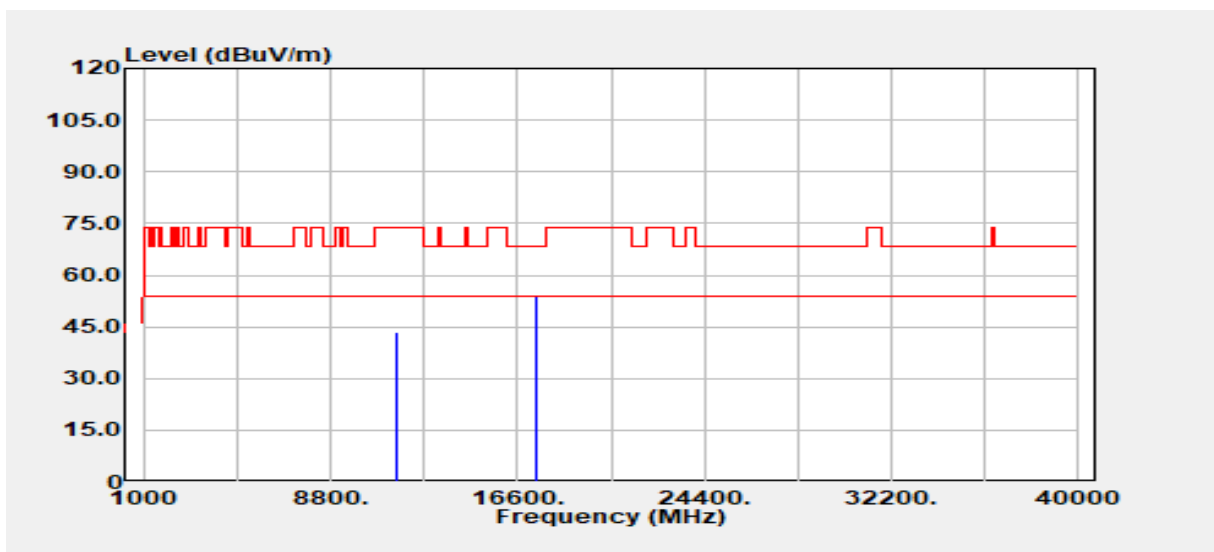


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	31.19	12.48	43.67	74.00	-30.33
11590.00	Average	23.34	12.48	35.82	54.00	-18.18
17385.00	Peak	28.75	25.27	54.02	68.20	-14.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5795 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

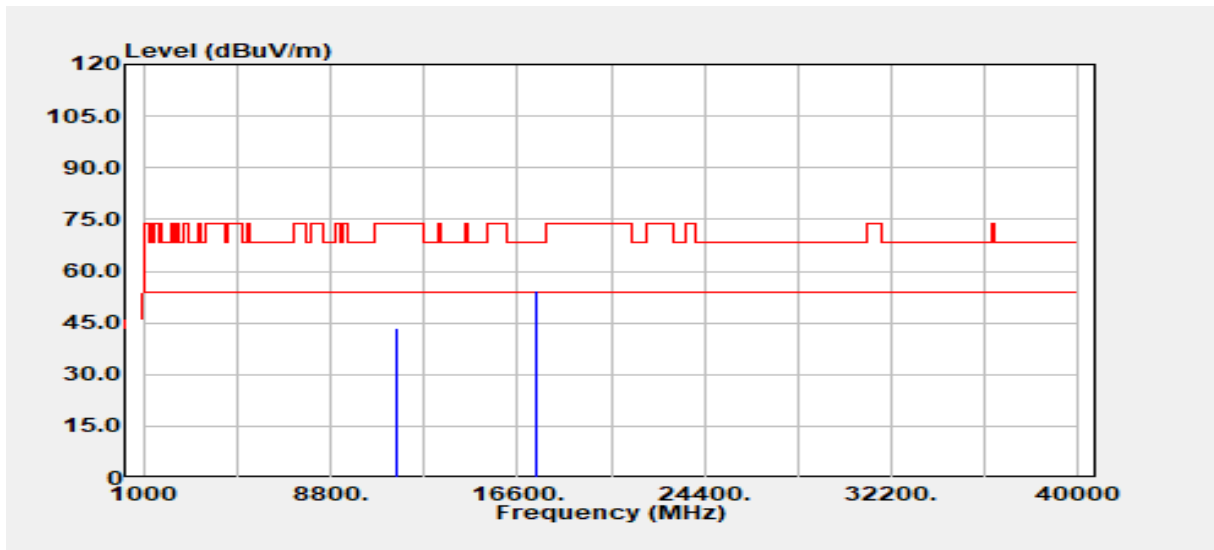


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11590.00	Peak	31.10	12.48	43.58	74.00	-30.42
11590.00	Average	24.75	12.48	37.23	54.00	-16.77
17385.00	Peak	28.93	25.27	54.20	68.20	-14.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

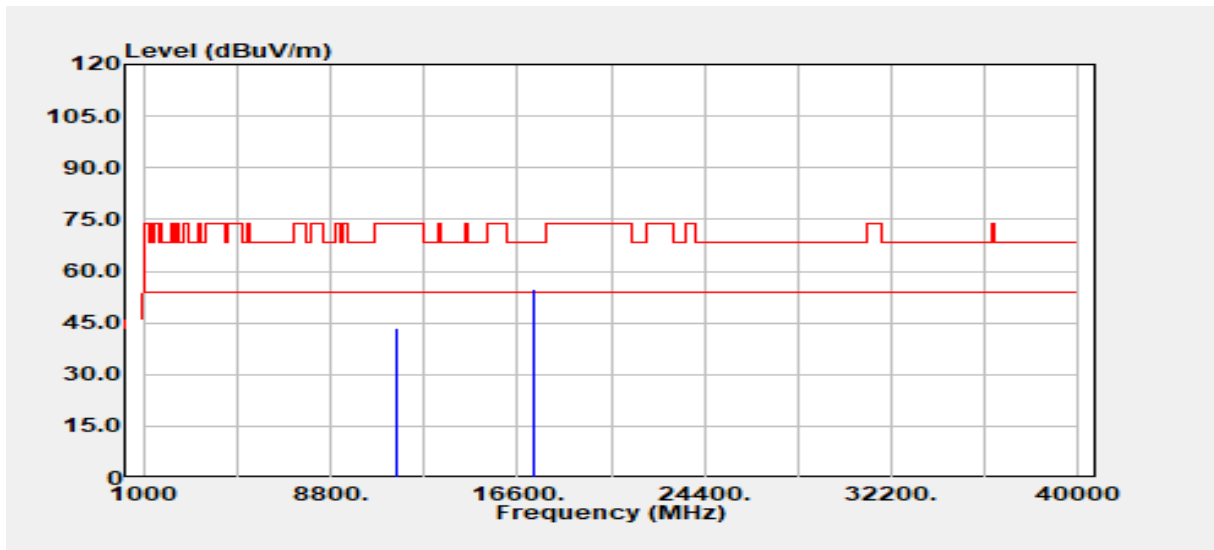


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	30.88	12.51	43.38	74.00	-30.62
11550.00	Average	24.24	12.51	36.75	54.00	-17.25
17325.00	Peak	29.07	25.79	54.86	68.20	-13.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5775 MHz	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 20, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

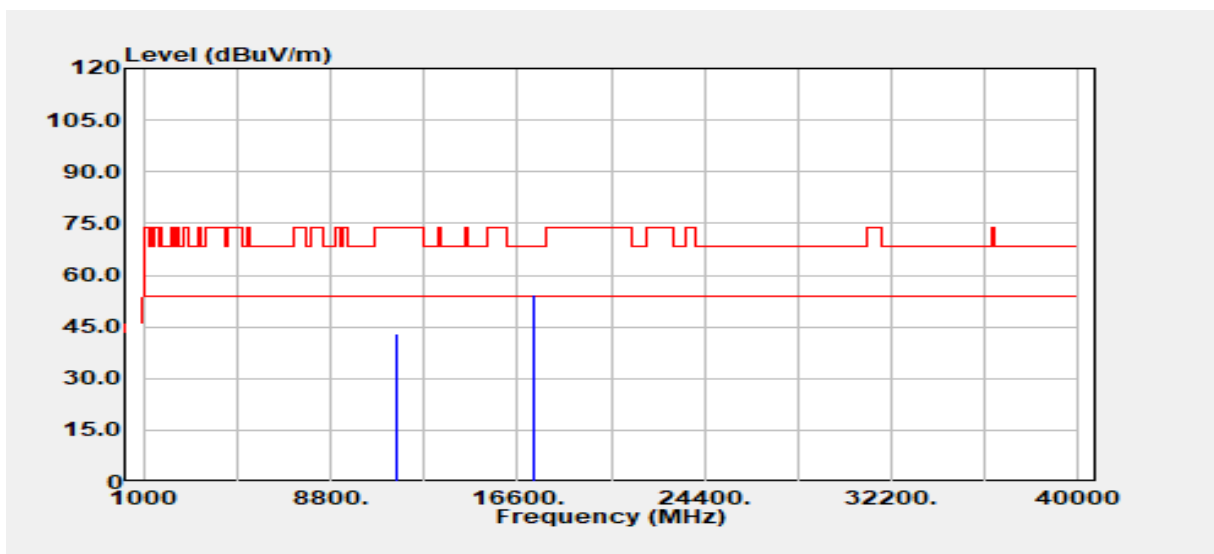

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11550.00	Peak	30.51	12.51	43.02	74.00	-30.98
11550.00	Average	23.67	12.51	36.18	54.00	-17.82
17325.00	Peak	28.55	25.79	54.34	68.20	-13.86
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

(5) Co-Location:

Test Mode	IEEE 802.11ax HE160 (5250 MHz)+ IEEE 802.11b mode (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

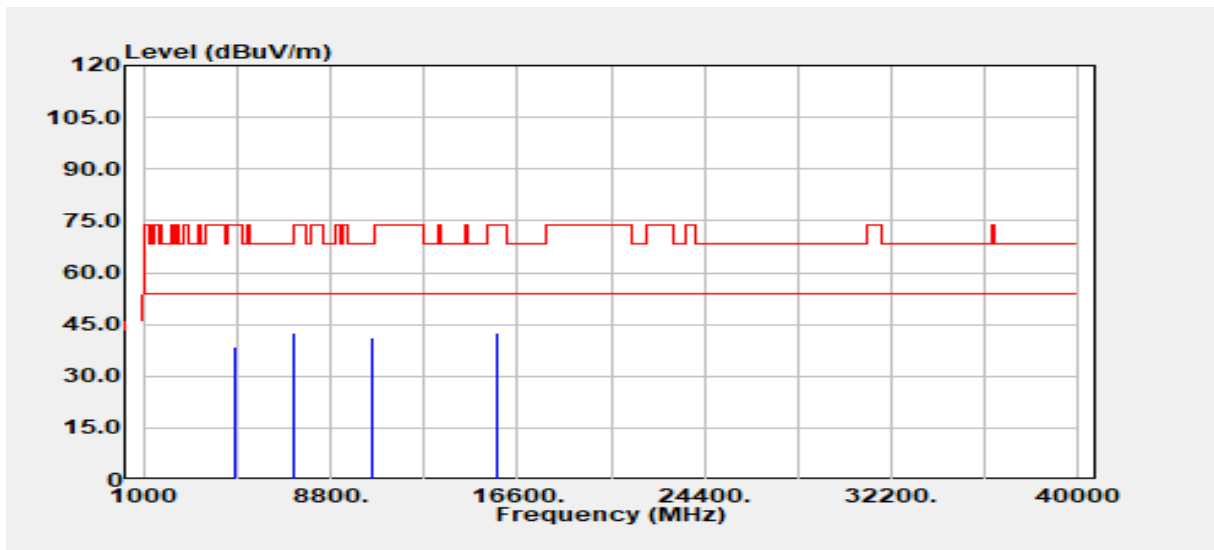


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4824.00	Peak	37.10	1.29	38.39	74.00	-35.61
4824.00	Average	26.95	1.29	28.24	54.00	-25.76
7236.00	Peak	35.03	7.72	42.74	68.20	-25.46
7236.00	Average	27.11	7.72	34.83	54.00	-19.17
10500.00	Peak	29.98	11.41	41.39	68.20	-26.81
15750.00	Peak	28.44	14.22	42.66	74.00	-31.34
15750.00	Average	18.49	14.22	32.71	54.00	-21.29

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 (5250 MHz)+ IEEE 802.11b mode (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

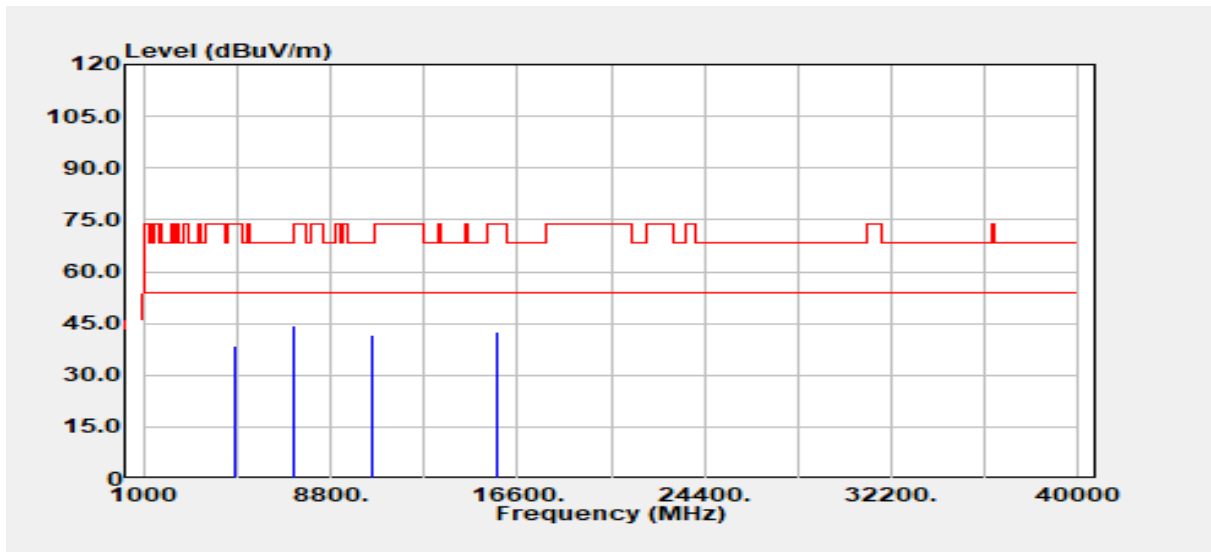


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	37.27	1.29	38.56	74.00	-35.44
4824.00	Average	27.04	1.29	28.33	54.00	-25.67
7236.00	Peak	36.81	7.72	44.53	68.20	-23.67
7236.00	Average	32.02	7.72	39.74	54.00	-14.26
10500.00	Peak	30.09	11.41	41.50	68.20	-26.70
15750.00	Peak	28.29	14.22	42.51	74.00	-31.49
15750.00	Average	17.69	14.22	31.91	54.00	-22.09

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a mode (5700 MHz)+ IEEE 802.11b mode (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 25, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

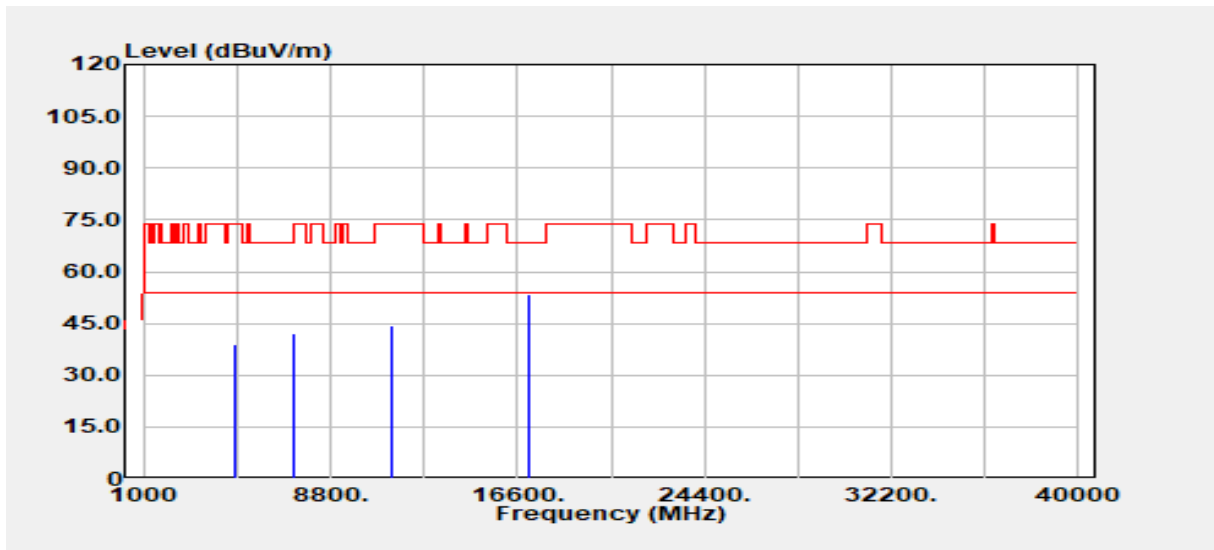


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
4824.00	Peak	37.60	1.29	38.89	74.00	-35.11
4824.00	Average	28.01	1.29	29.30	54.00	-24.70
7236.00	Peak	34.57	7.72	42.29	68.20	-25.91
7236.00	Average	28.06	7.72	35.77	54.00	-18.23
11400.00	Peak	32.14	12.39	44.53	74.00	-29.47
11400.00	Average	25.62	12.39	38.01	54.00	-15.99
17100.00	Peak	27.84	25.62	53.46	68.20	-14.74

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a mode (5700 MHz)+ IEEE 802.11b mode (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 25, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

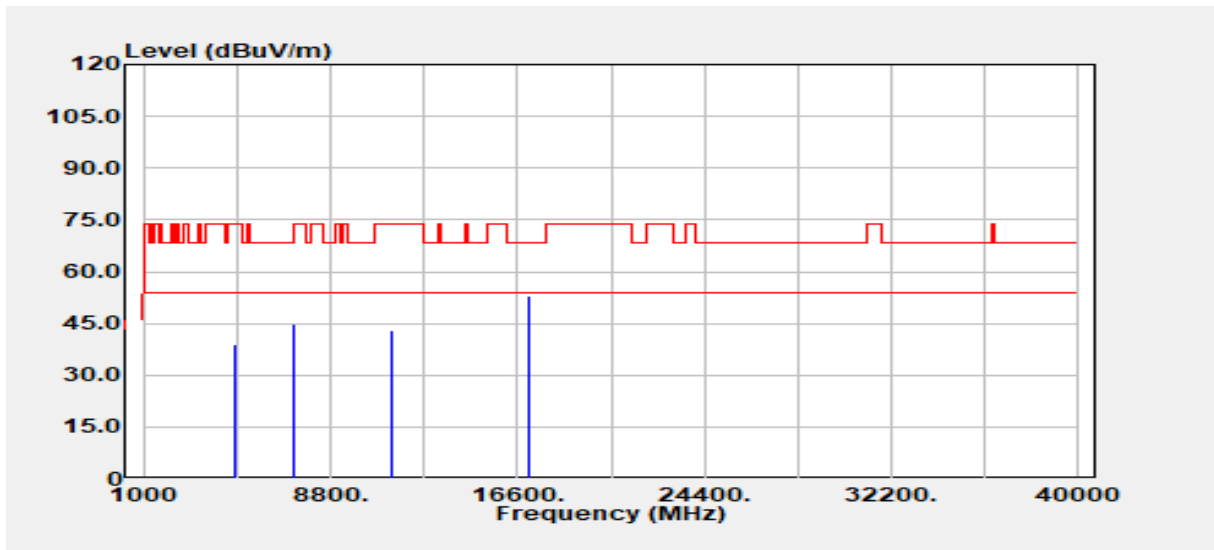


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
4824.00	Peak	37.79	1.29	39.08	74.00	-34.92
4824.00	Average	28.15	1.29	29.43	54.00	-24.57
7236.00	Peak	36.99	7.72	44.71	68.20	-23.49
7236.00	Average	32.32	7.72	40.04	54.00	-13.96
11400.00	Peak	30.62	12.39	43.01	74.00	-30.99
11400.00	Average	25.75	12.39	38.14	54.00	-15.86
17100.00	Peak	27.36	25.62	52.98	68.20	-15.22

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 (5825 MHz)+ IEEE 802.11b mode (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

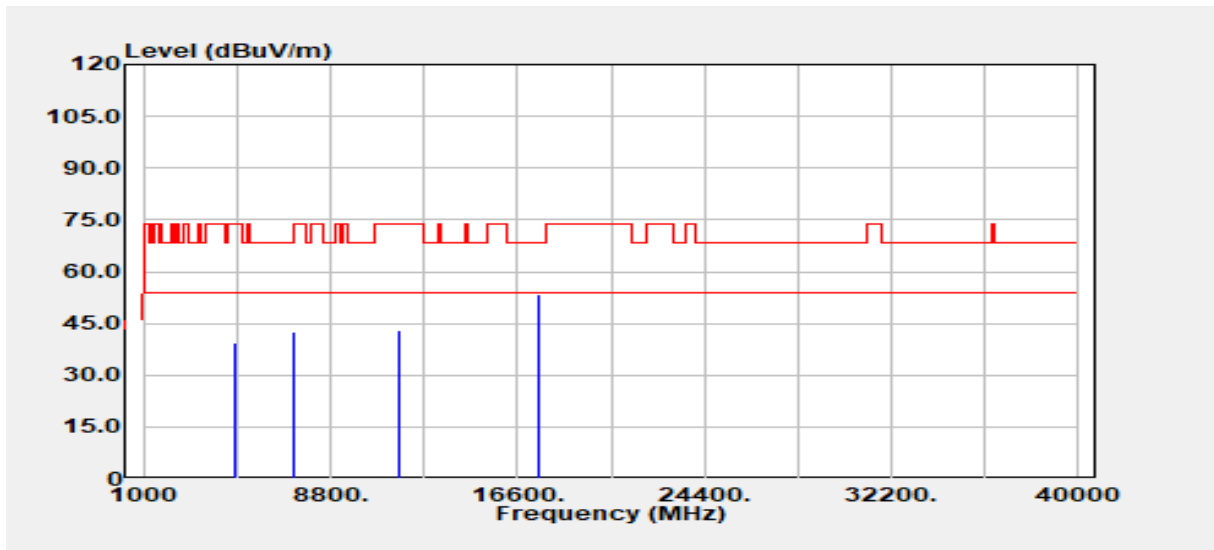


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	38.19	1.29	39.47	74.00	-34.53
4824.00	Average	28.21	1.29	29.50	54.00	-24.50
7236.00	Peak	34.94	7.72	42.65	68.20	-25.55
7236.00	Average	28.64	7.72	36.36	54.00	-17.64
11650.00	Peak	30.60	12.43	43.03	74.00	-30.97
11650.00	Average	24.27	12.43	36.70	54.00	-17.31
17475.00	Peak	28.46	25.06	53.52	68.20	-14.68

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 (5825 MHz)+ IEEE 802.11b mode (2412 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

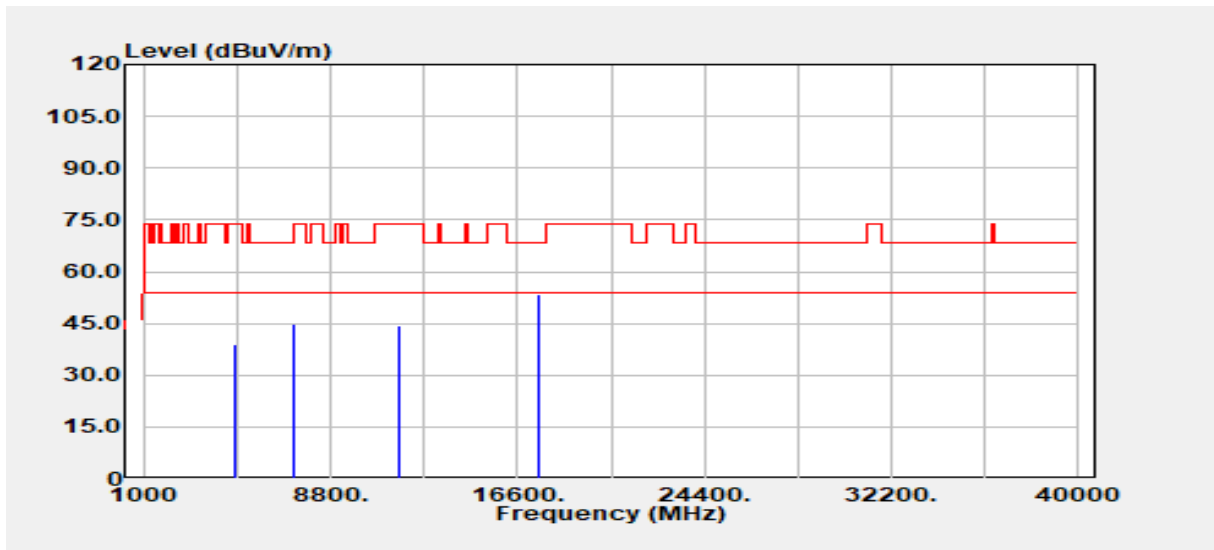


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	37.86	1.29	39.15	74.00	-34.85
4824.00	Average	26.11	1.29	27.40	54.00	-26.60
7236.00	Peak	37.02	7.72	44.74	68.20	-23.46
7236.00	Average	32.21	7.72	39.93	54.00	-14.07
11650.00	Peak	32.02	12.43	44.45	74.00	-29.55
11650.00	Average	23.76	12.43	36.19	54.00	-17.82
17475.00	Peak	28.33	25.06	53.39	68.20	-14.81

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a mode (2412 MHz)+ IEEE 802.11ax HE160 (5250 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

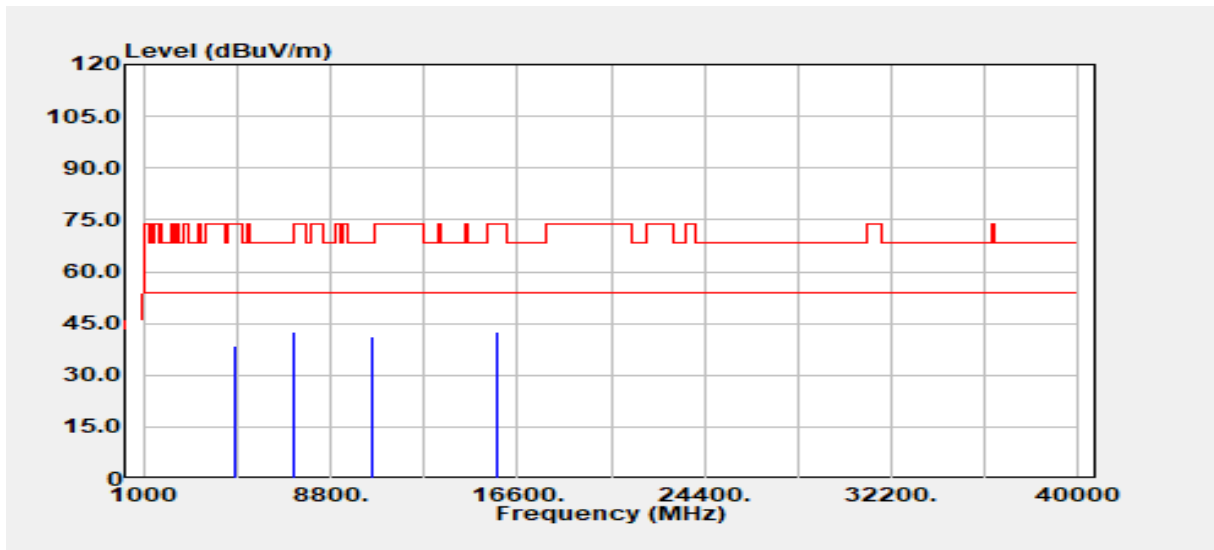


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	37.10	1.29	38.39	74.00	-35.61
4824.00	Average	26.95	1.29	28.24	54.00	-25.76
7236.00	Peak	35.03	7.72	42.74	68.20	-25.46
7236.00	Average	27.11	7.72	34.83	54.00	-19.17
10500.00	Peak	29.98	11.41	41.39	68.20	-26.81
15750.00	Peak	28.44	14.22	42.66	74.00	-31.34
15750.00	Average	18.49	14.22	32.71	54.00	-21.29

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a mode (2412 MHz)+ IEEE 802.11ax HE160 (5250 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

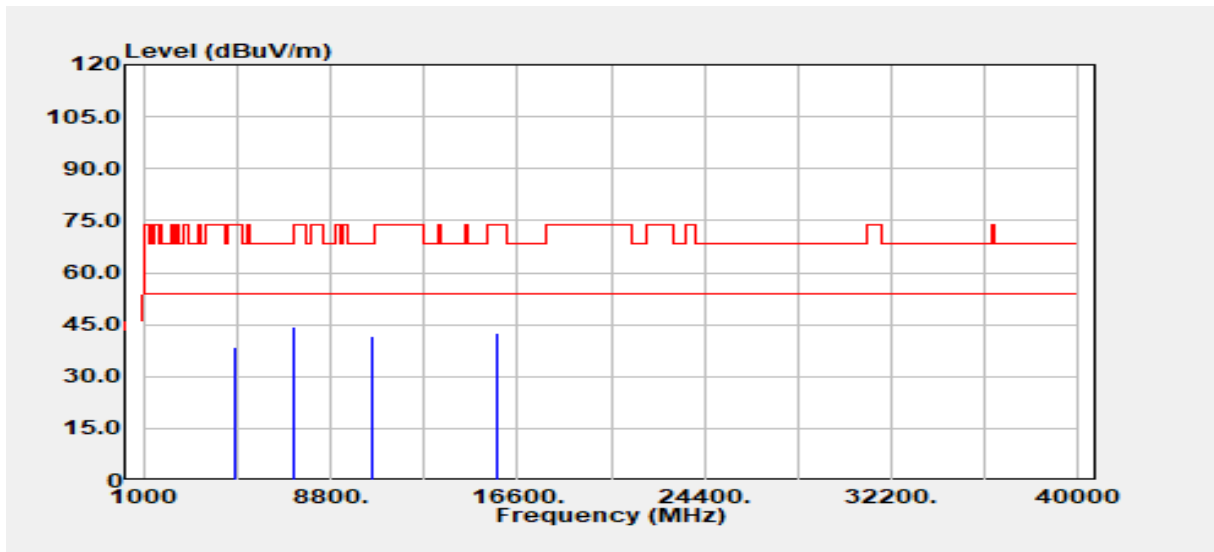


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.00	Peak	37.27	1.29	38.56	74.00	-35.44
4824.00	Average	27.04	1.29	28.33	54.00	-25.67
7236.00	Peak	36.81	7.72	44.53	68.20	-23.67
7236.00	Average	32.02	7.72	39.74	54.00	-14.26
10500.00	Peak	30.09	11.41	41.50	68.20	-26.70
15750.00	Peak	28.29	14.22	42.51	74.00	-31.49
15750.00	Average	17.69	14.22	31.91	54.00	-22.09

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b mode (2412 MHz)+ IEEE 802.11a mode (5700 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 25, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

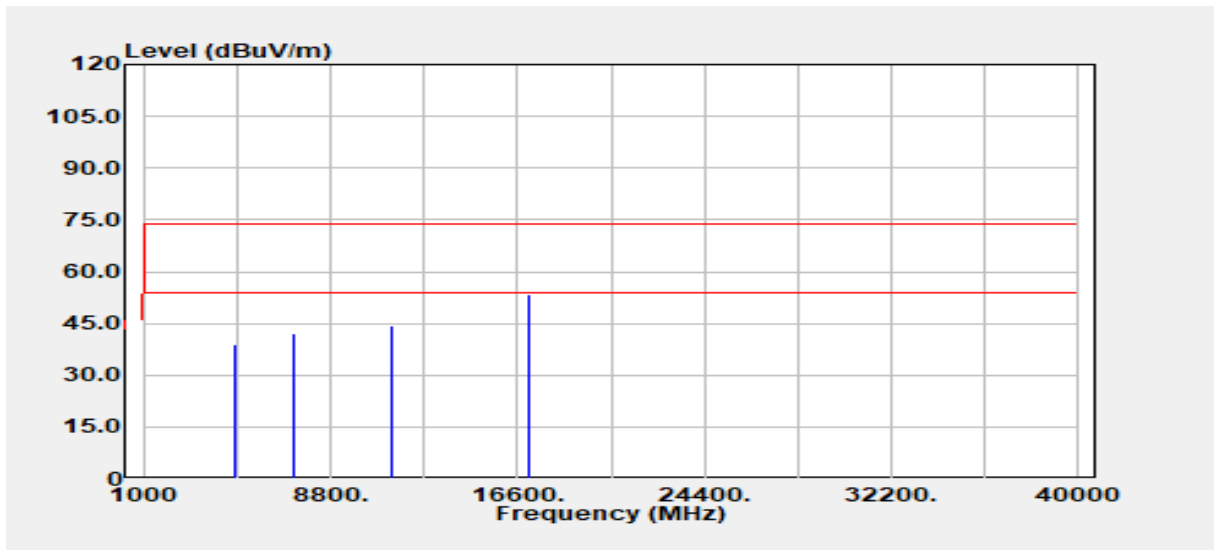


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	37.60	1.29	38.89	74.00	-35.11
4824.00	Average	28.01	1.29	29.30	54.00	-24.70
7236.00	Peak	34.57	7.72	42.29	74.00	-31.71
7236.00	Average	28.06	7.72	35.77	54.00	-18.23
11400.00	Peak	32.14	12.39	44.53	74.00	-29.47
11400.00	Average	25.62	12.39	38.01	54.00	-15.99
17100.00	Peak	27.84	25.62	53.46	74.00	-20.54
17100.00	Average	18.28	25.62	43.90	54.00	-10.10

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b mode (2412 MHz)+ IEEE 802.11a mode (5700 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 25, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

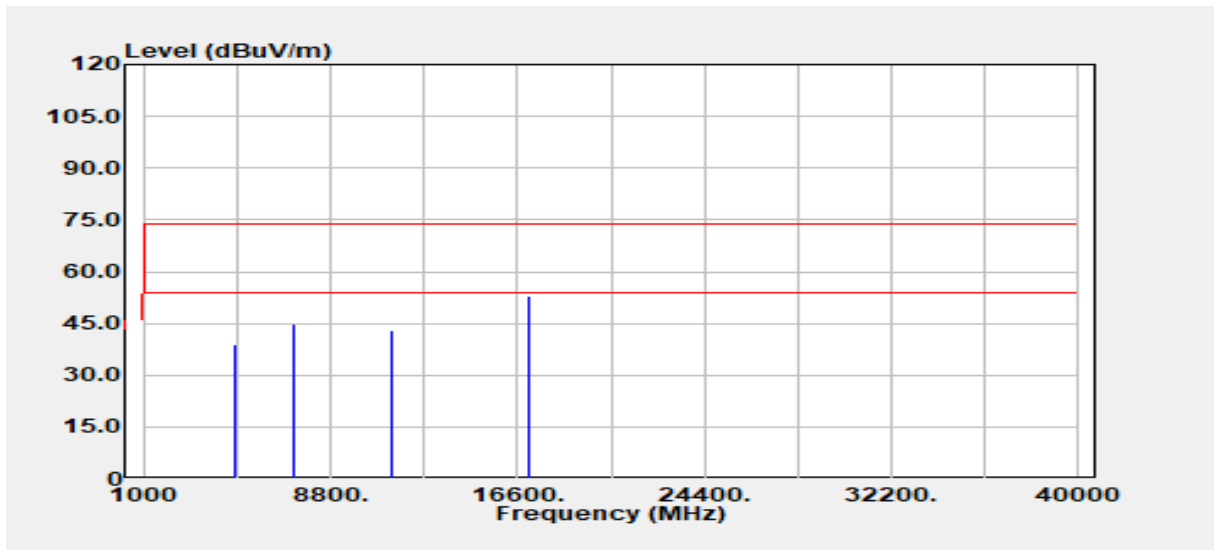


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	37.79	1.29	39.08	74.00	-34.92
4824.00	Average	28.15	1.29	29.43	54.00	-24.57
7236.00	Peak	36.99	7.72	44.71	74.00	-29.29
7236.00	Average	32.32	7.72	40.04	54.00	-13.96
11400.00	Peak	30.62	12.39	43.01	74.00	-30.99
11400.00	Average	25.75	12.39	38.14	54.00	-15.86
17100.00	Peak	27.36	25.62	52.98	74.00	-21.02
17100.00	Average	18.84	25.62	44.46	54.00	-9.54

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b mode (2412 MHz)+ IEEE 802.11ax HE20 (5825 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

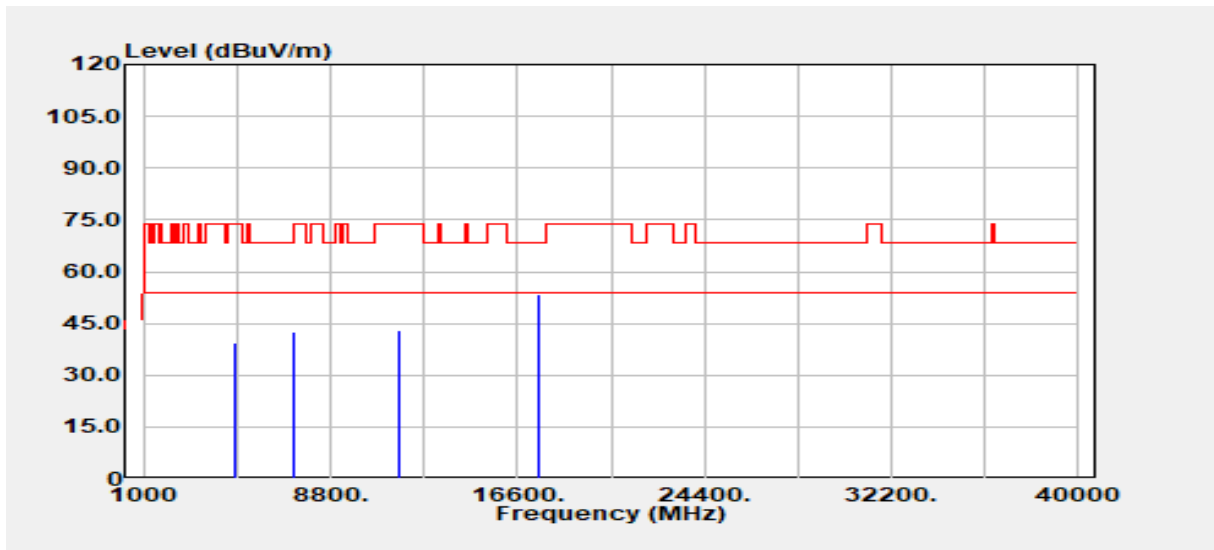


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
4824.00	Peak	38.19	1.29	39.47	74.00	-34.53
4824.00	Average	28.21	1.29	29.50	54.00	-24.50
7236.00	Peak	34.94	7.72	42.65	68.20	-25.55
7236.00	Average	28.64	7.72	36.36	54.00	-17.64
11650.00	Peak	30.60	12.43	43.03	74.00	-30.97
11650.00	Average	24.27	12.43	36.70	54.00	-17.31
17475.00	Peak	28.46	25.06	53.52	68.20	-14.68

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b mode (2412 MHz)+ IEEE 802.11ax HE20 (5825 MHz)	Temp/Hum	23.2(°C)/ 60%RH
Test Item	Harmonic	Test Date	April 24, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

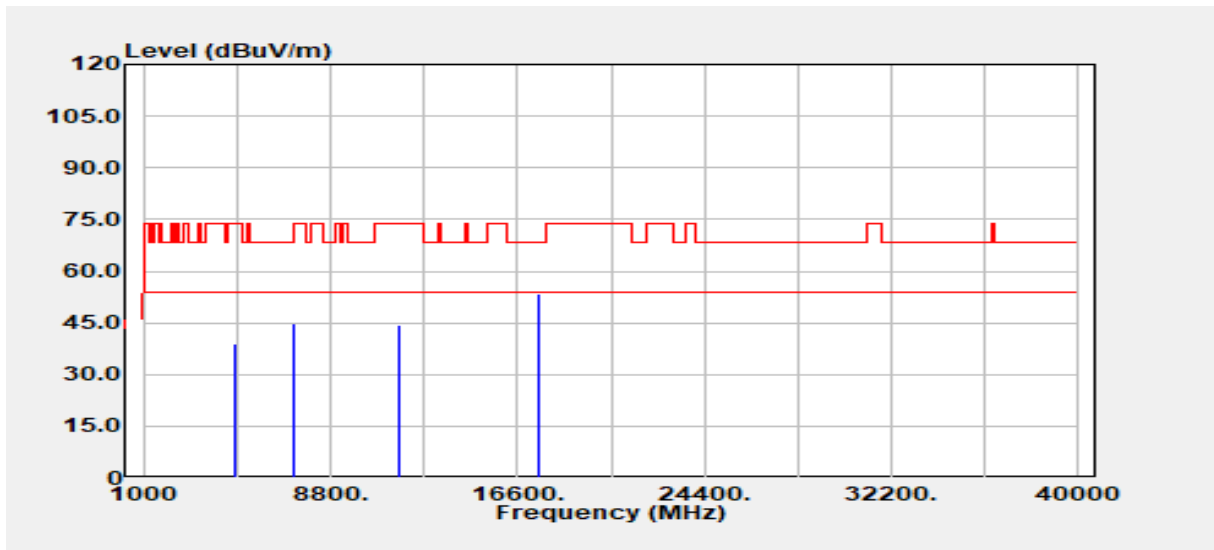

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	37.86	1.29	39.15	74.00	-34.85
4824.00	Average	26.11	1.29	27.40	54.00	-26.60
7236.00	Peak	37.02	7.72	44.74	68.20	-23.46
7236.00	Average	32.21	7.72	39.93	54.00	-14.07
11650.00	Peak	32.02	12.43	44.45	74.00	-29.55
11650.00	Average	23.76	12.43	36.19	54.00	-17.82
17475.00	Peak	28.33	25.06	53.39	68.20	-14.81


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Above 1G Test Data: Beamforming

Test Data for UNII-1

Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

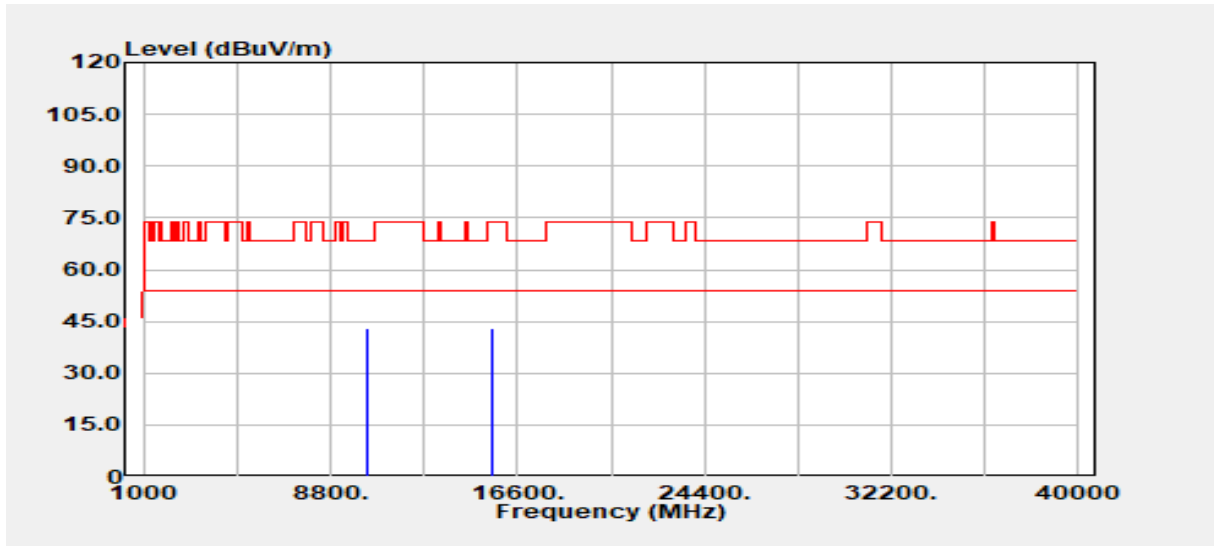


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	31.97	11.26	43.24	68.20	-24.96
15540.00	Peak	30.48	12.38	42.86	74.00	-31.14
15540.00	Average	24.13	12.38	36.50	54.00	-17.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5180 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

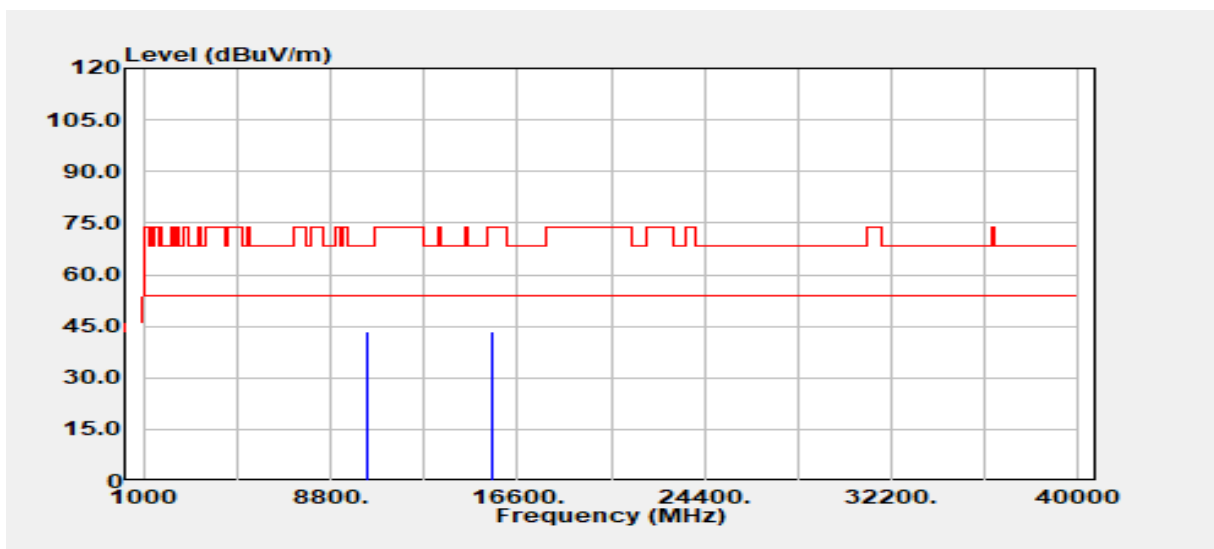


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10360.00	Peak	32.23	11.26	43.50	68.20	-24.70
15540.00	Peak	31.00	12.38	43.38	74.00	-30.62
15540.00	Average	24.15	12.38	36.53	54.00	-17.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5220 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

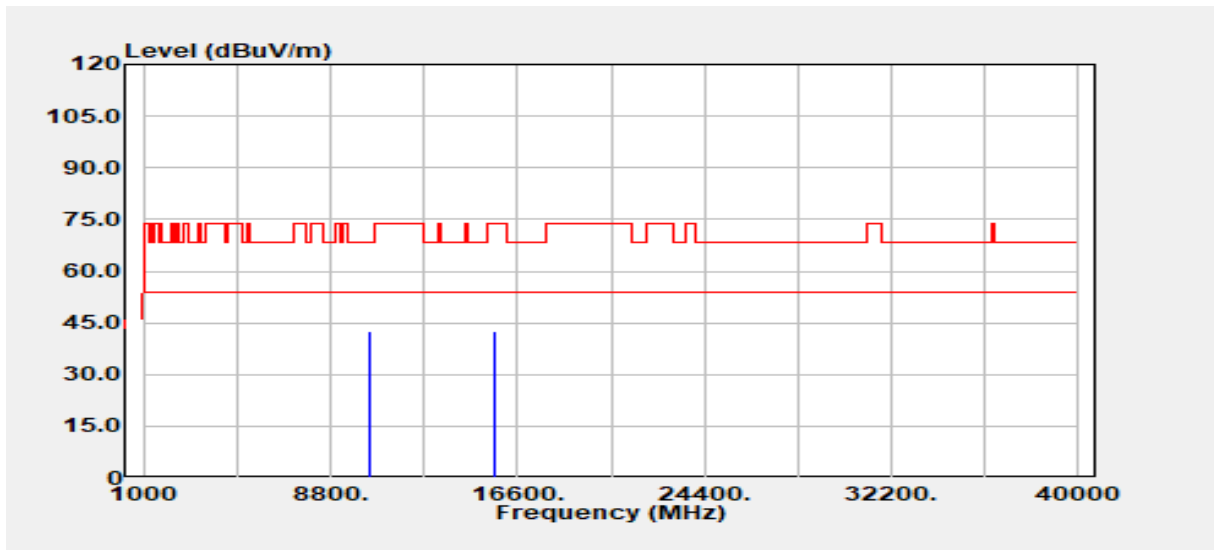


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	31.45	11.25	42.70	68.20	-25.50
15660.00	Peak	29.09	13.53	42.62	74.00	-31.38
15660.00	Average	24.21	13.53	37.73	54.00	-16.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5220 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

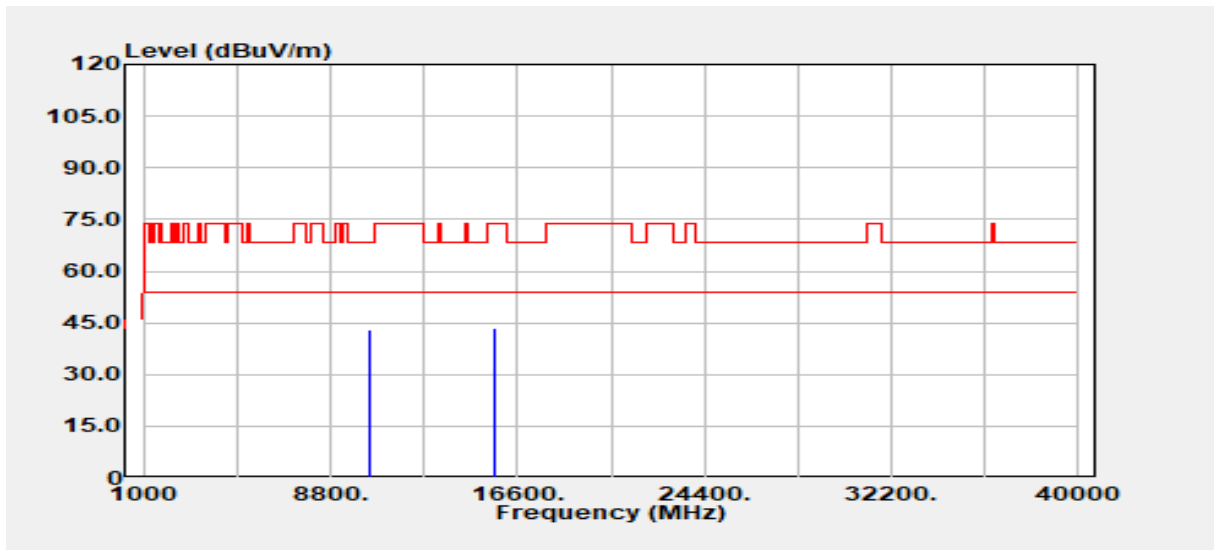


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10440.00	Peak	31.57	11.25	42.82	68.20	-25.38
15660.00	Peak	29.91	13.53	43.43	74.00	-30.57
15660.00	Average	24.10	13.53	37.62	54.00	-16.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5240 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

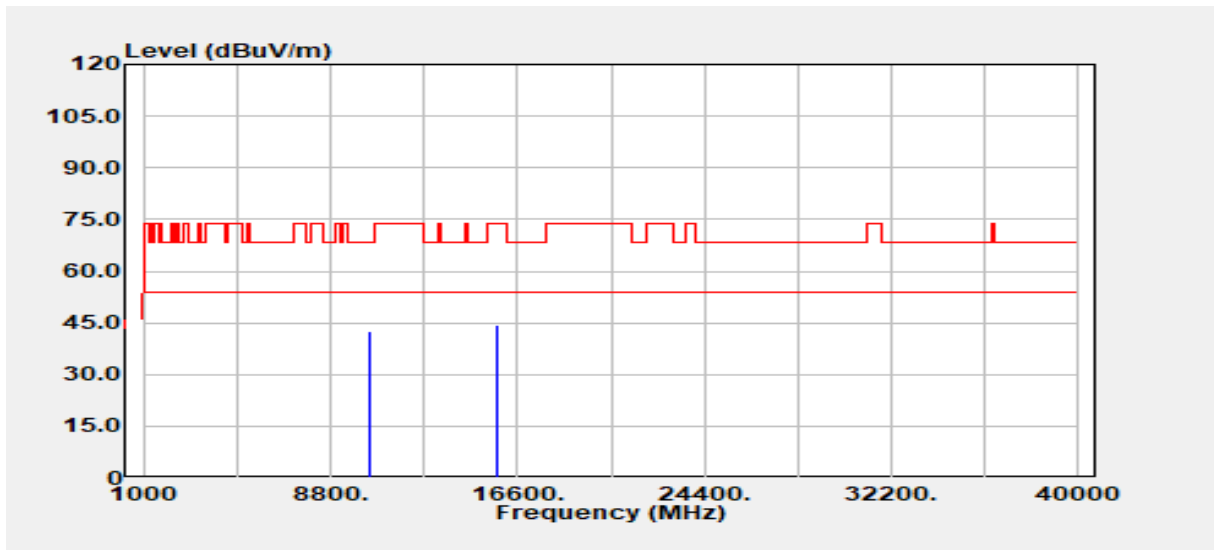


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	31.09	11.35	42.45	68.20	-25.75
15720.00	Peak	30.08	14.11	44.19	74.00	-29.81
15720.00	Average	23.68	14.11	37.78	54.00	-16.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5240 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

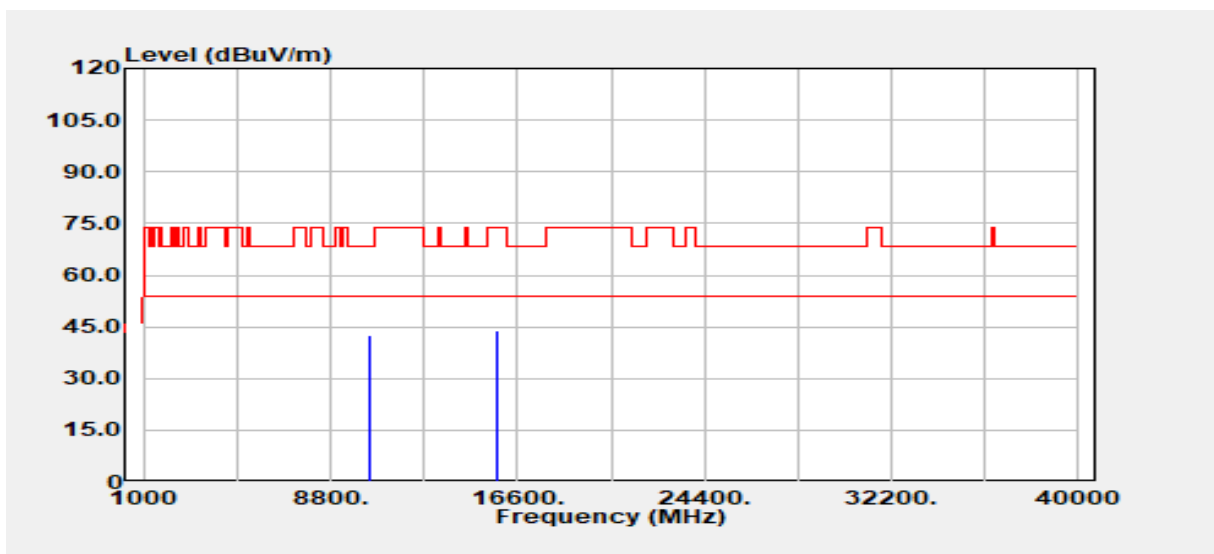


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	31.10	11.35	42.45	68.20	-25.75
15720.00	Peak	29.64	14.11	43.74	74.00	-30.26
15720.00	Average	23.90	14.11	38.00	54.00	-16.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

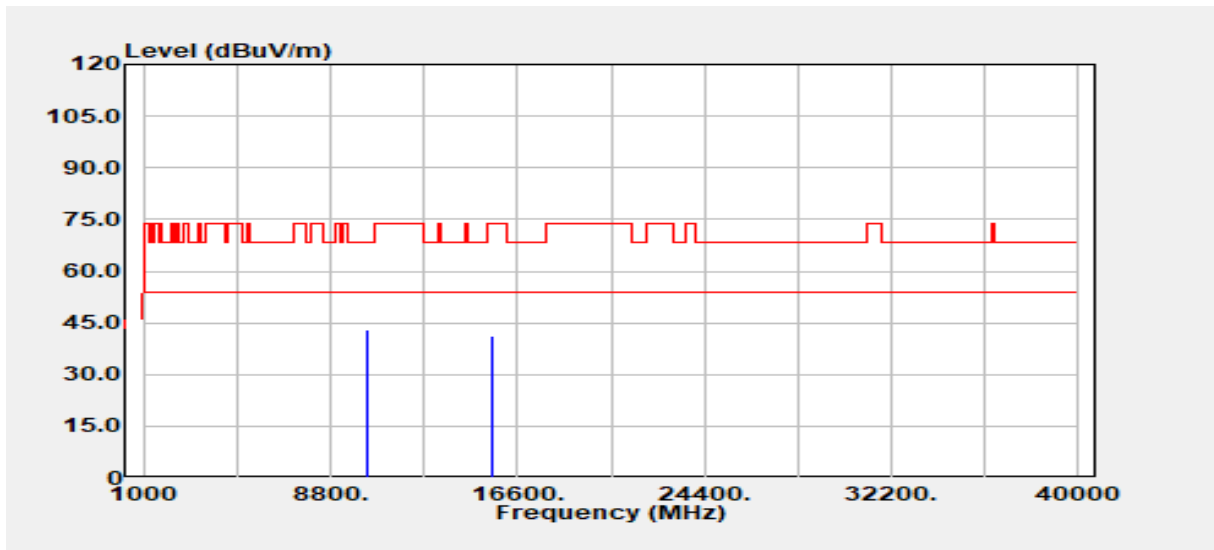


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	31.99	11.22	43.21	68.20	-24.99
15570.00	Peak	28.73	12.41	41.15	74.00	-32.85
15570.00	Average	22.87	12.41	35.28	54.00	-18.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5190 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

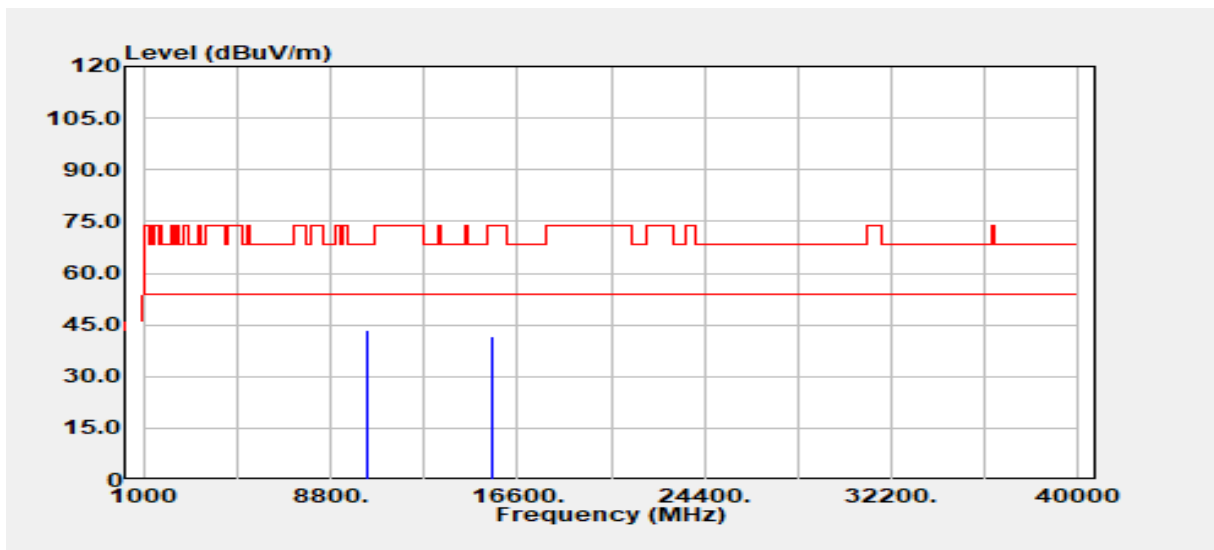


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	32.16	11.22	43.38	68.20	-24.82
15570.00	Peak	29.43	12.41	41.84	74.00	-32.16
15570.00	Average	22.60	12.41	35.01	54.00	-18.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5230 MHz	Temp/Hum	23.9(°C) / 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

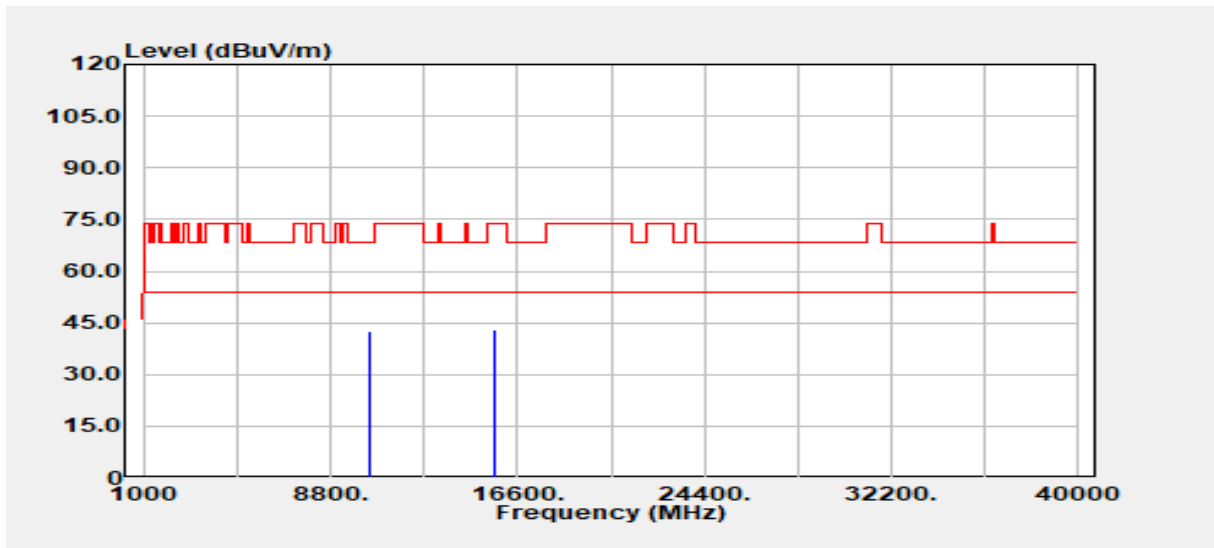


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	31.11	11.30	42.41	68.20	-25.79
15690.00	Peak	29.07	13.90	42.97	74.00	-31.03
15690.00	Average	22.53	13.90	36.43	54.00	-17.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5230 MHz	Temp/Hum	23.9(°C) / 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

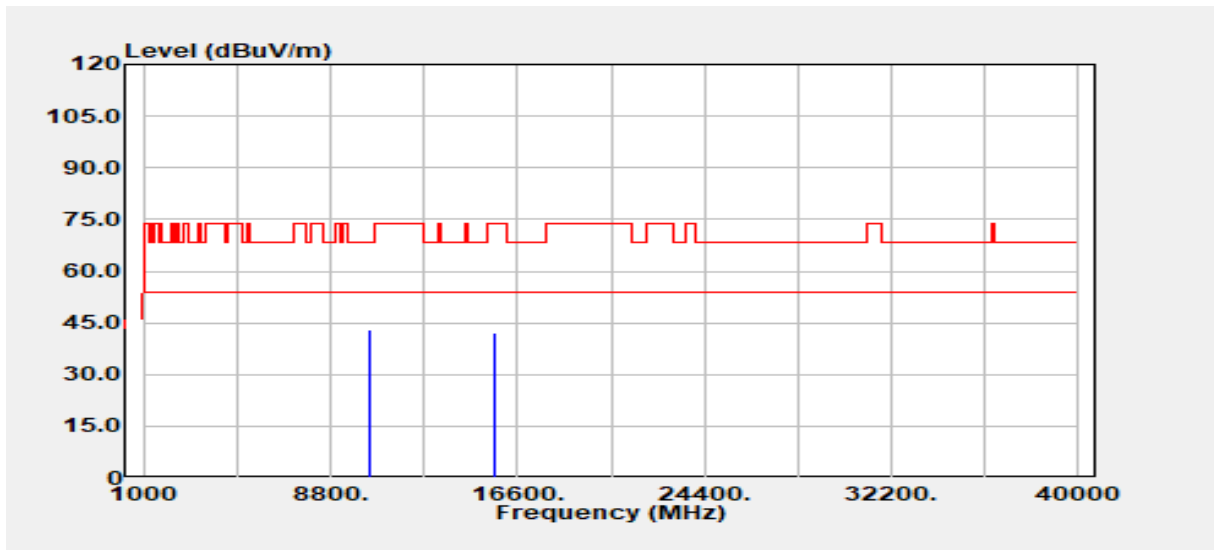


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	31.50	11.30	42.80	68.20	-25.40
15690.00	Peak	28.41	13.90	42.32	74.00	-31.68
15690.00	Average	22.38	13.90	36.29	54.00	-17.71
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

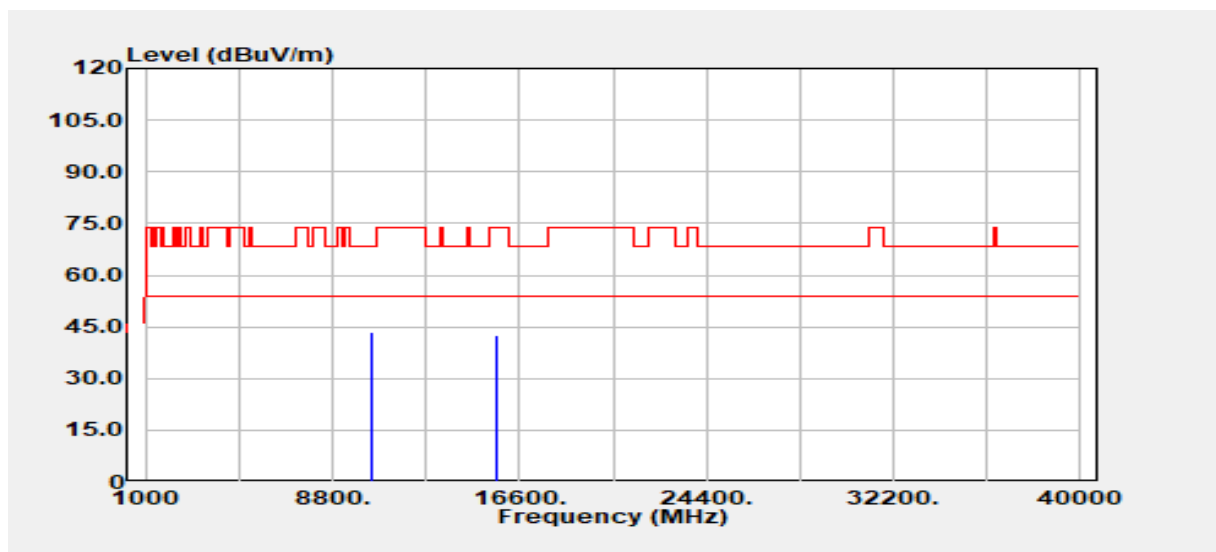


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	32.24	11.21	43.45	68.20	-24.75
15630.00	Peak	29.69	13.06	42.75	74.00	-31.25
15630.00	Average	23.84	13.06	36.90	54.00	-17.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5210 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

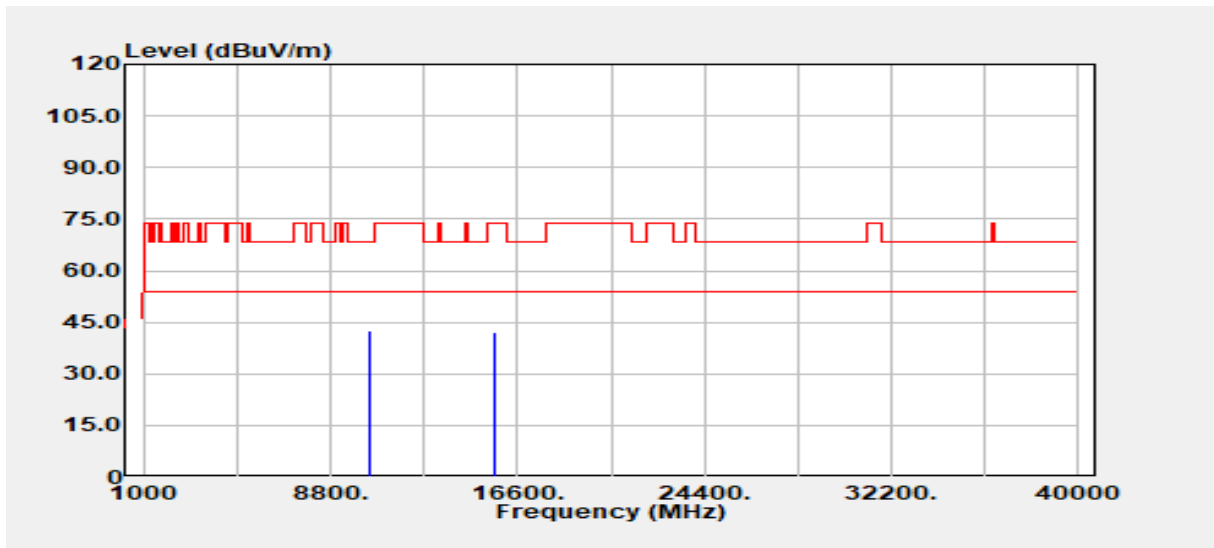


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	31.54	11.21	42.75	68.20	-25.45
15630.00	Peak	29.17	13.06	42.22	74.00	-31.78
15630.00	Average	24.01	13.06	37.07	54.00	-16.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5180 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

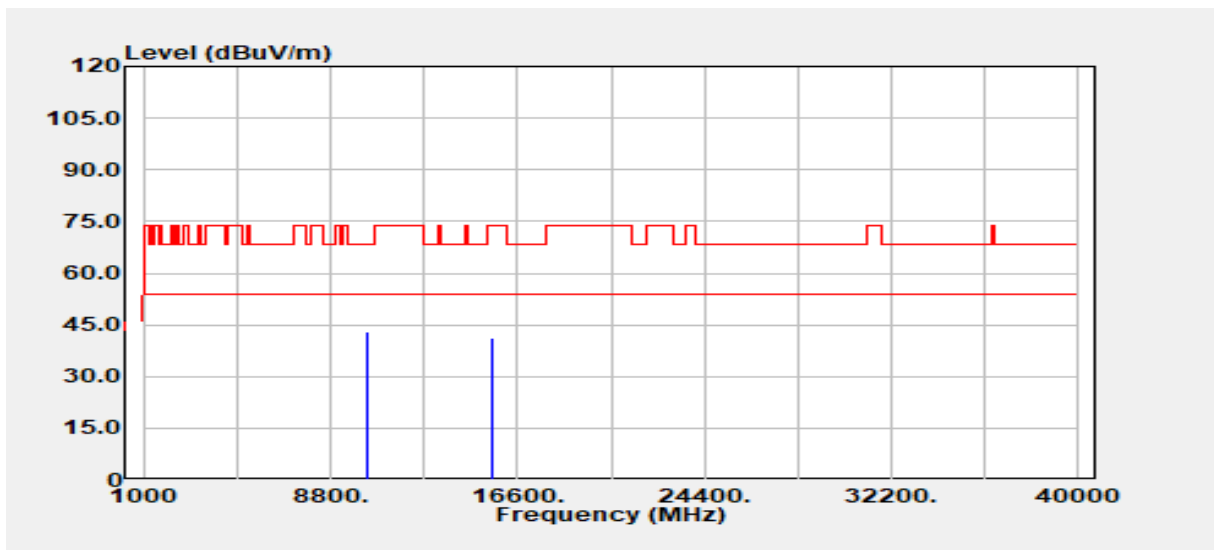


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	31.76	11.26	43.02	68.20	-25.18
15540.00	Peak	28.76	12.38	41.14	74.00	-32.86
15540.00	Average	21.29	12.38	33.67	54.00	-20.33
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5180 MHz_	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

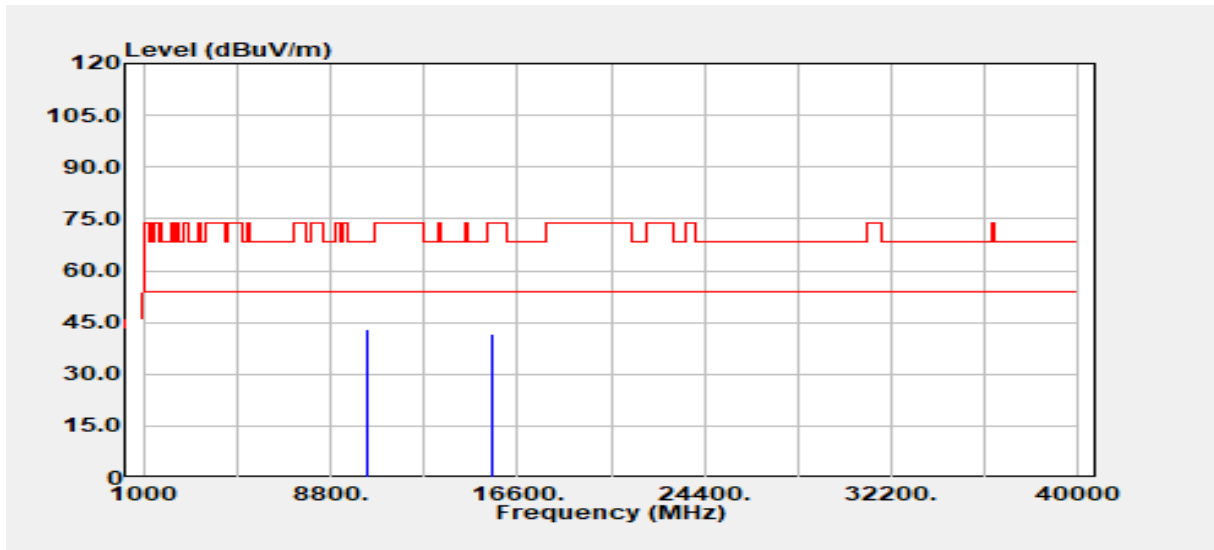


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10360.00	Peak	31.73	11.26	42.99	68.20	-25.21
15540.00	Peak	29.18	12.38	41.56	74.00	-32.44
15540.00	Average	21.84	12.38	34.22	54.00	-19.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5220 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

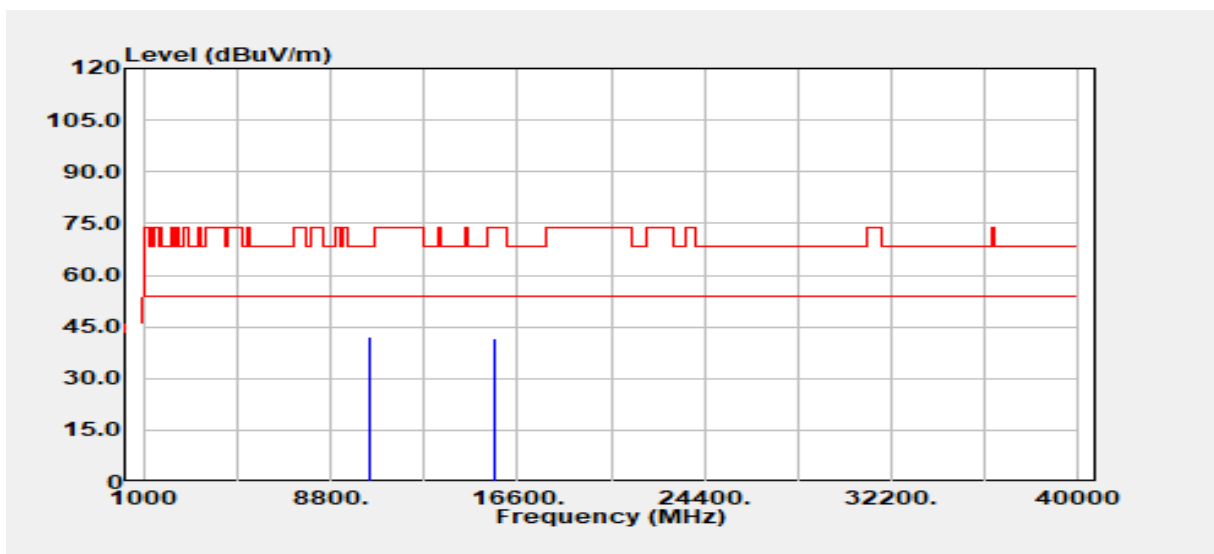


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	31.06	11.25	42.31	68.20	-25.89
15660.00	Peak	27.93	13.53	41.45	74.00	-32.55
15660.00	Average	21.46	13.53	34.99	54.00	-19.01
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5220 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

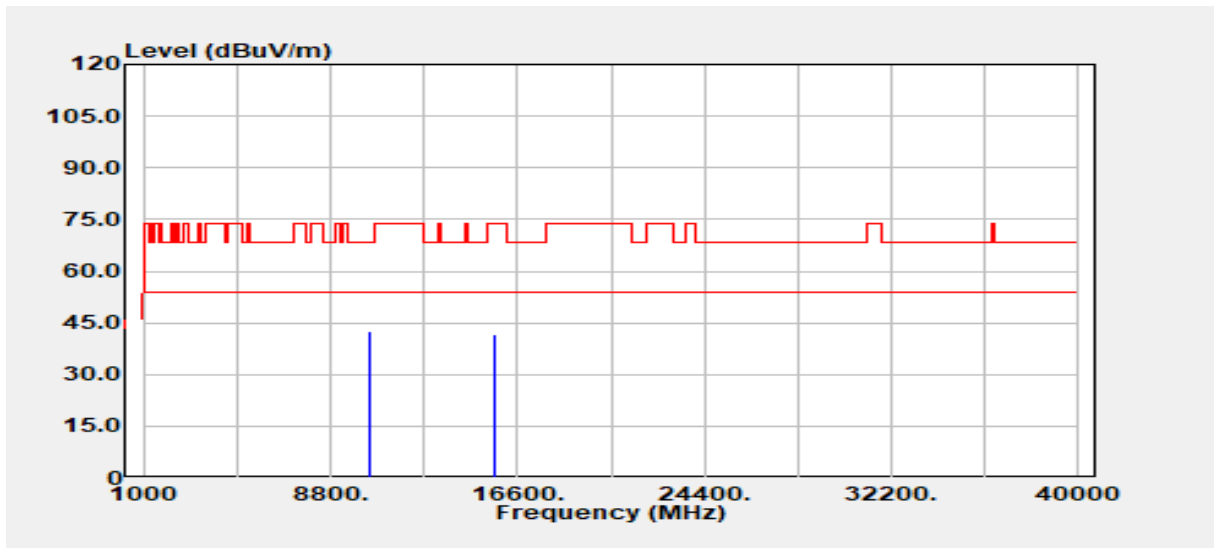


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10440.00	Peak	31.46	11.25	42.71	68.20	-25.49
15660.00	Peak	27.93	13.53	41.46	74.00	-32.54
15660.00	Average	21.26	13.53	34.79	54.00	-19.21
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5240 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

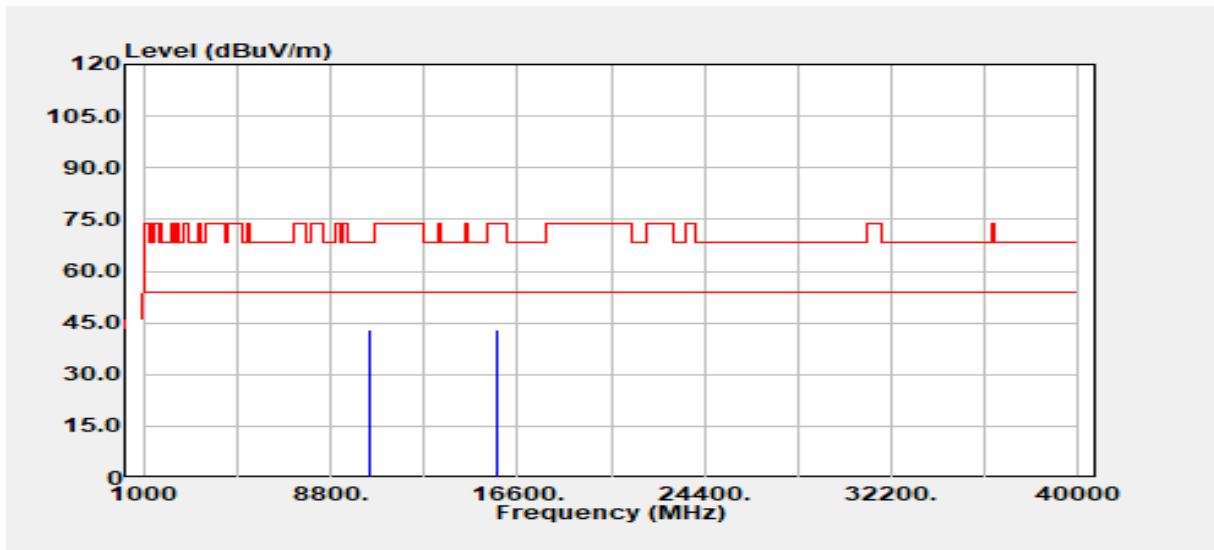


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10480.00	Peak	31.64	11.35	43.00	68.20	-25.20
15720.00	Peak	28.84	14.11	42.95	74.00	-31.05
15720.00	Average	22.41	14.11	36.52	54.00	-17.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5240 MHz_	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

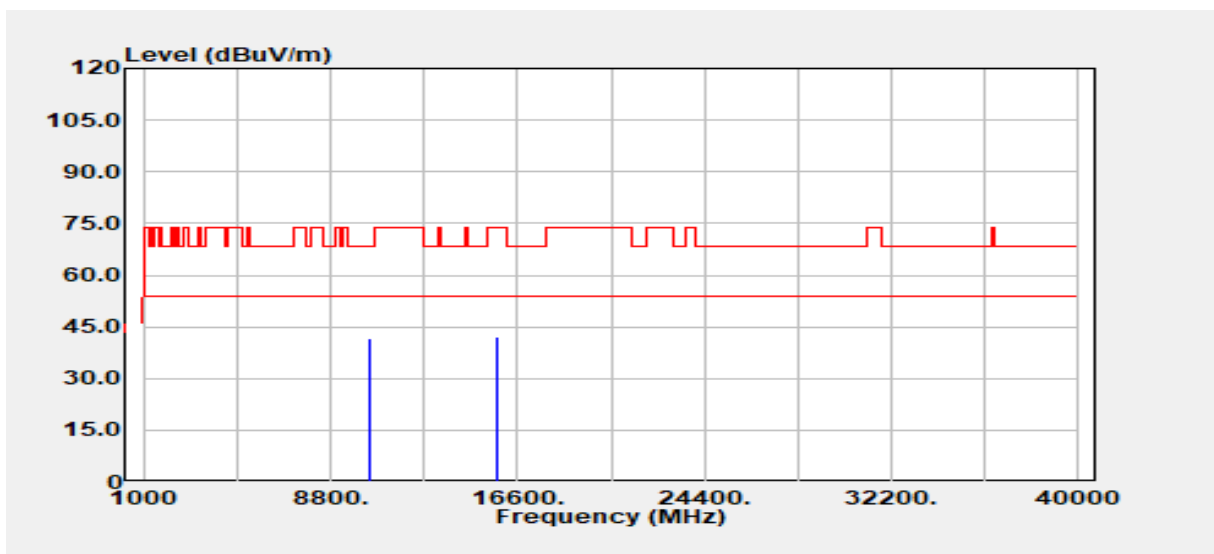


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10480.00	Peak	30.32	11.35	41.67	68.20	-26.53
15720.00	Peak	28.19	14.11	42.30	74.00	-31.70
15720.00	Average	21.32	14.11	35.43	54.00	-18.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

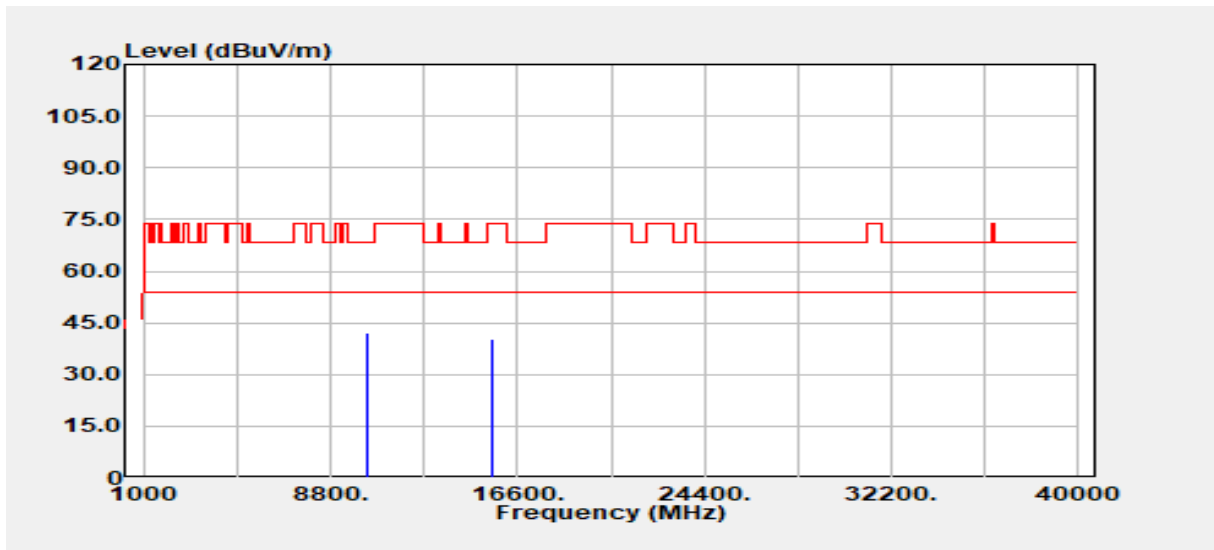


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	31.03	11.22	42.24	68.20	-25.96
15570.00	Peak	27.89	12.41	40.30	74.00	-33.70
15570.00	Average	21.31	12.41	33.72	54.00	-20.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5190 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

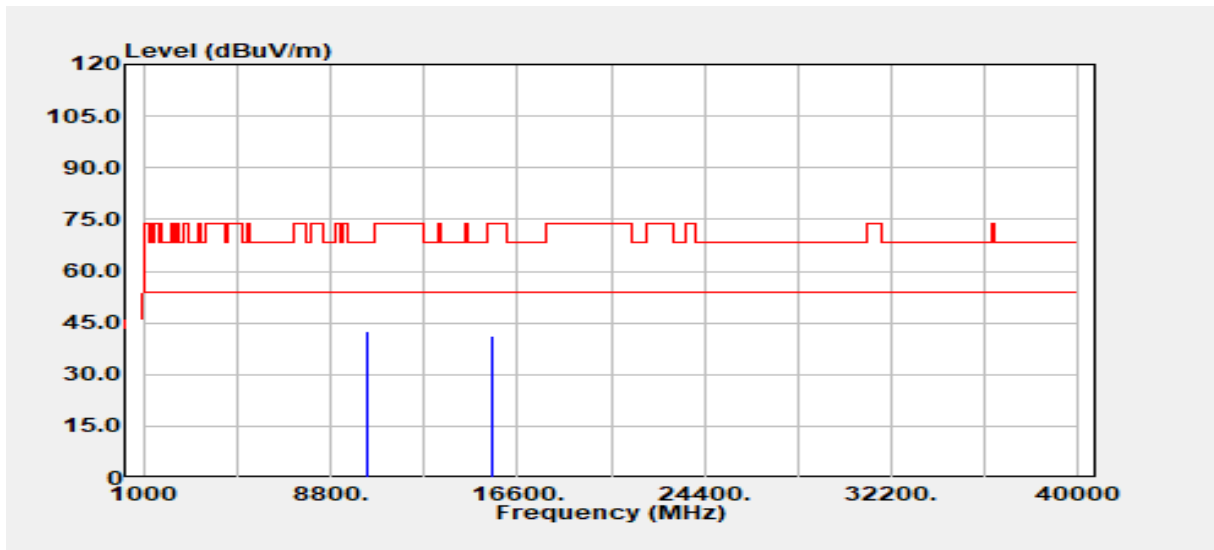


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10380.00	Peak	31.46	11.22	42.67	68.20	-25.53
15570.00	Peak	28.81	12.41	41.22	74.00	-32.78
15570.00	Average	22.18	12.41	34.59	54.00	-19.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5230 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

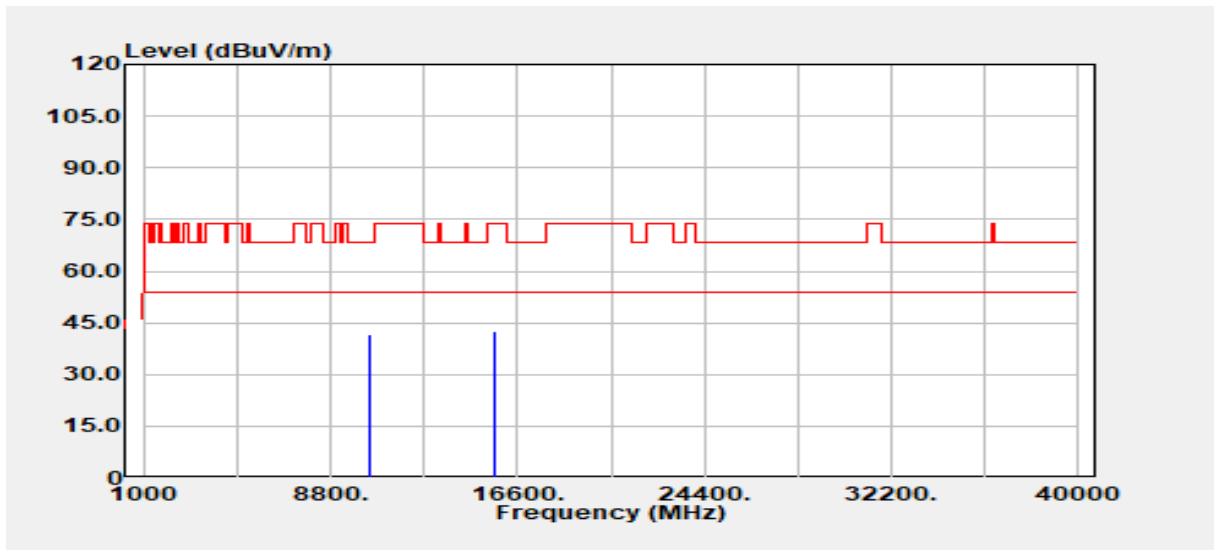


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	30.57	11.30	41.87	68.20	-26.33
15690.00	Peak	28.84	13.90	42.75	74.00	-31.25
15690.00	Average	21.18	13.90	35.08	54.00	-18.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5230 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

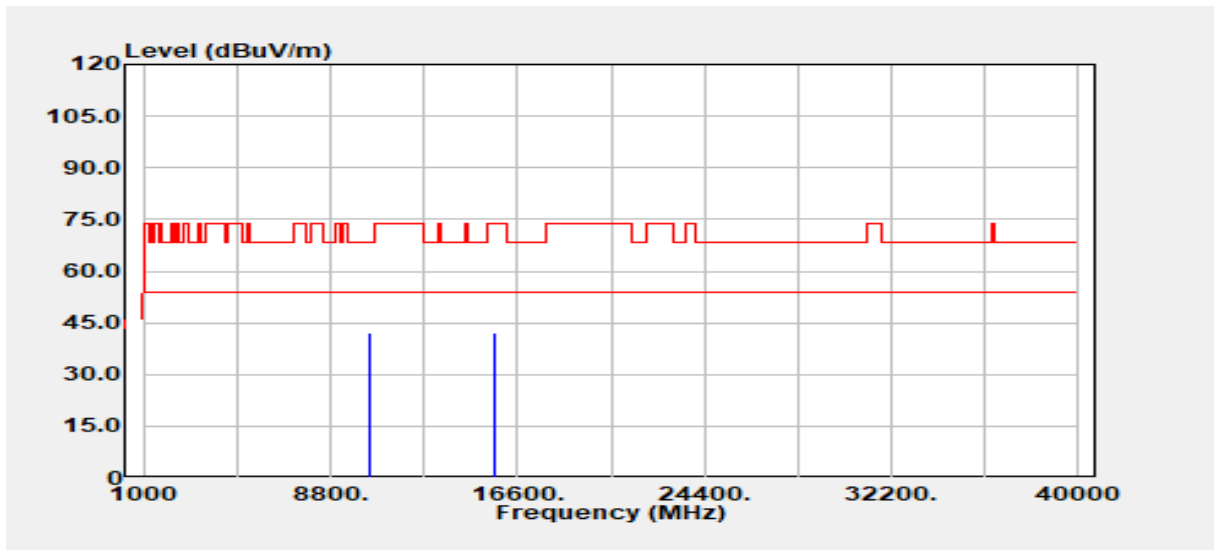


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10460.00	Peak	30.71	11.30	42.01	68.20	-26.19
15690.00	Peak	28.27	13.90	42.17	74.00	-31.83
15690.00	Average	21.26	13.90	35.16	54.00	-18.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

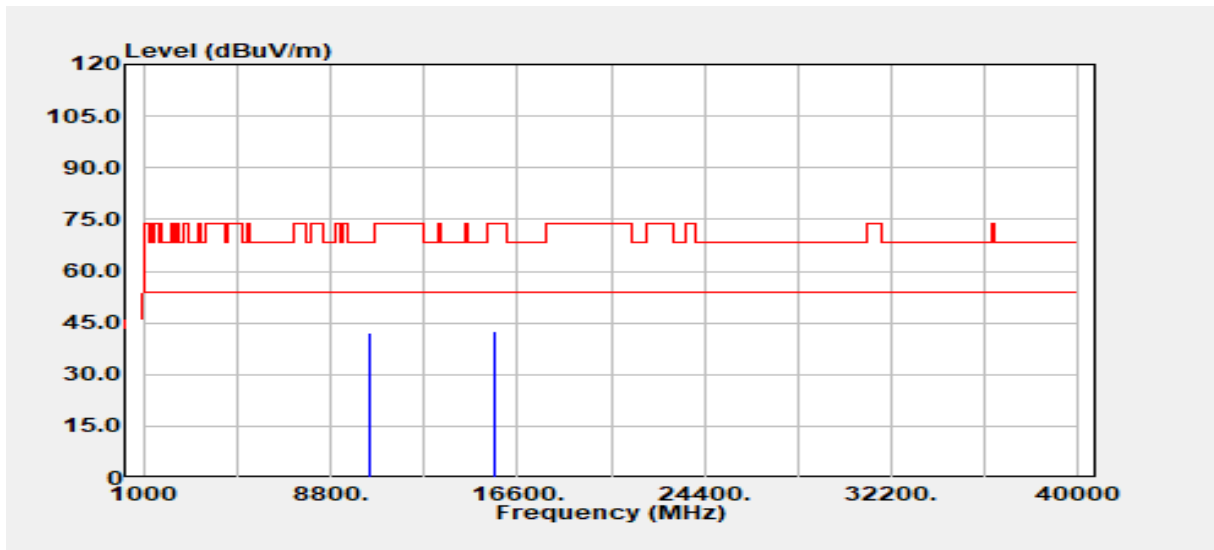


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10420.00	Peak	31.00	11.21	42.21	68.20	-25.99
15630.00	Peak	29.30	13.06	42.36	74.00	-31.64
15630.00	Average	22.71	13.06	35.77	54.00	-18.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5210 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

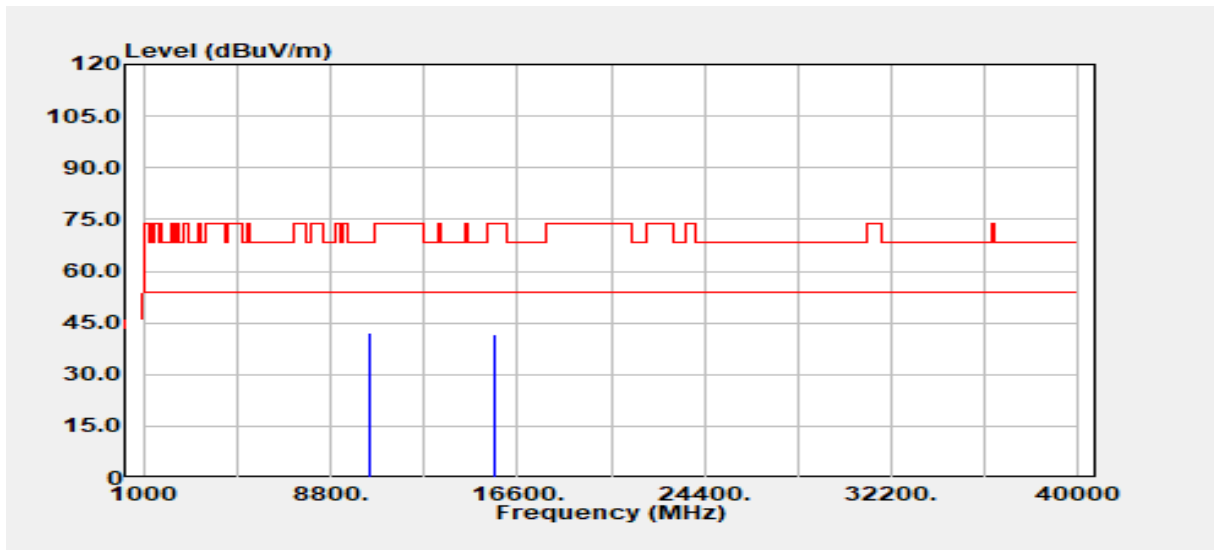


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10420.00	Peak	31.00	11.21	42.21	68.20	-25.99
15630.00	Peak	28.70	13.06	41.76	74.00	-32.24
15630.00	Average	22.67	13.06	35.73	54.00	-18.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2a

Test Mode	IEEE 802.11n HT20 / 5260 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

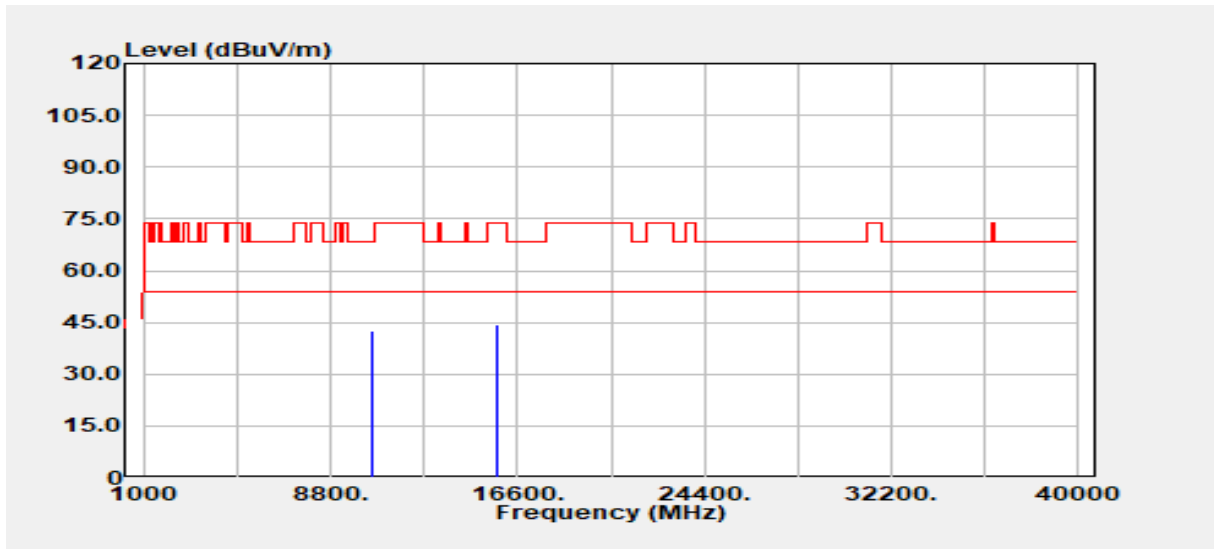


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	30.98	11.41	42.39	68.20	-25.81
15780.00	Peak	30.18	14.08	44.26	74.00	-29.74
15780.00	Average	23.75	14.08	37.82	54.00	-16.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5260 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

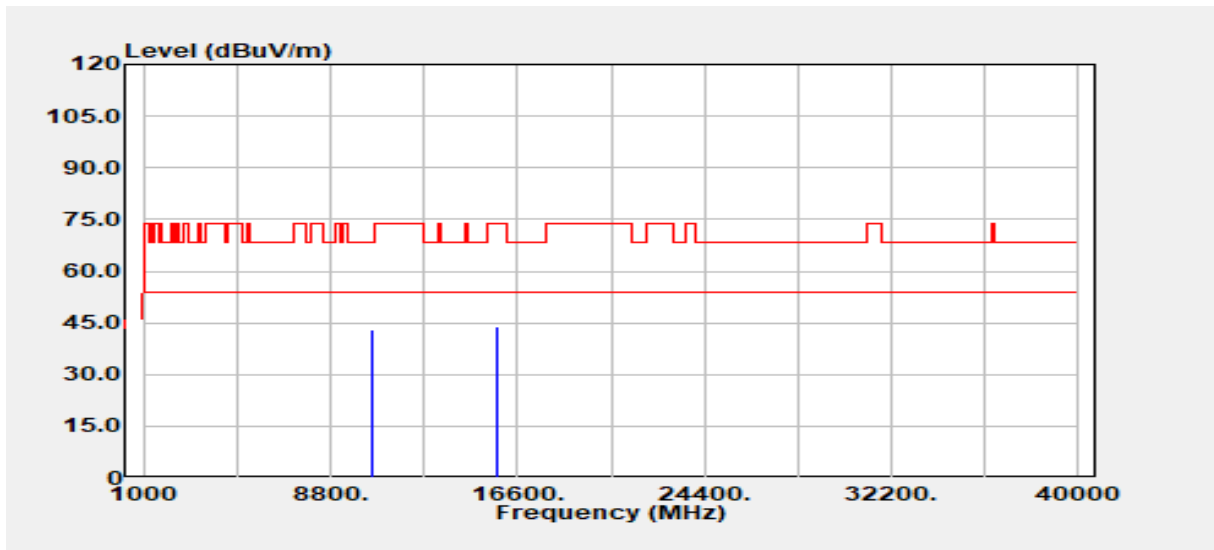


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	31.51	11.41	42.92	68.20	-25.28
15780.00	Peak	29.85	14.08	43.93	74.00	-30.07
15780.00	Average	23.68	14.08	37.76	54.00	-16.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5300 MHz	Temp/Hum	24.8(°C) / 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

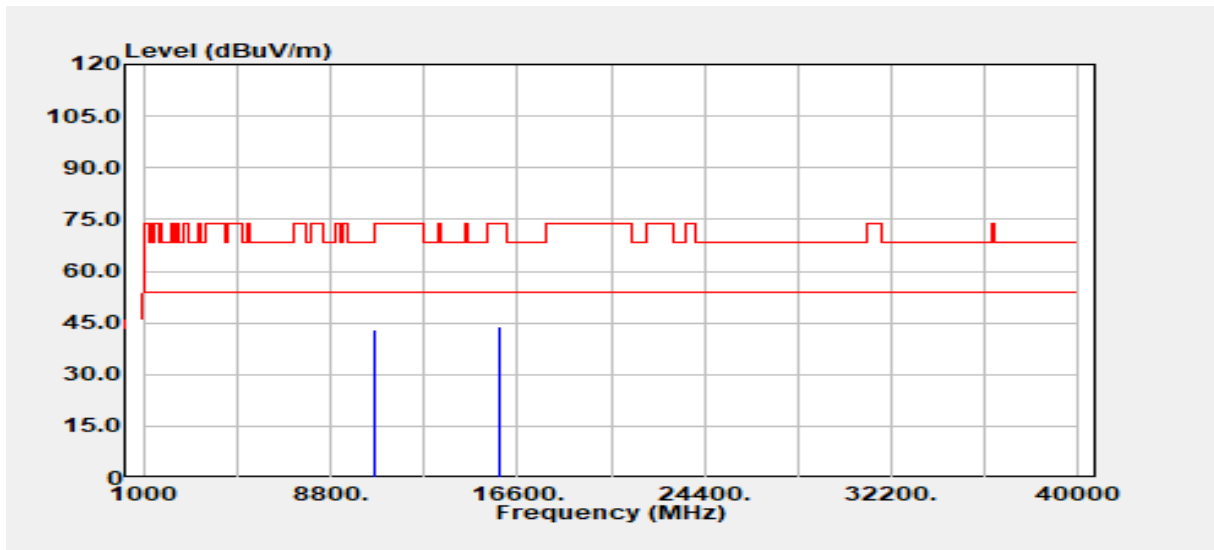


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	31.68	11.53	43.21	68.20	-24.99
15900.00	Peak	29.54	14.45	43.99	74.00	-30.01
15900.00	Average	24.37	14.45	38.82	54.00	-15.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5300 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

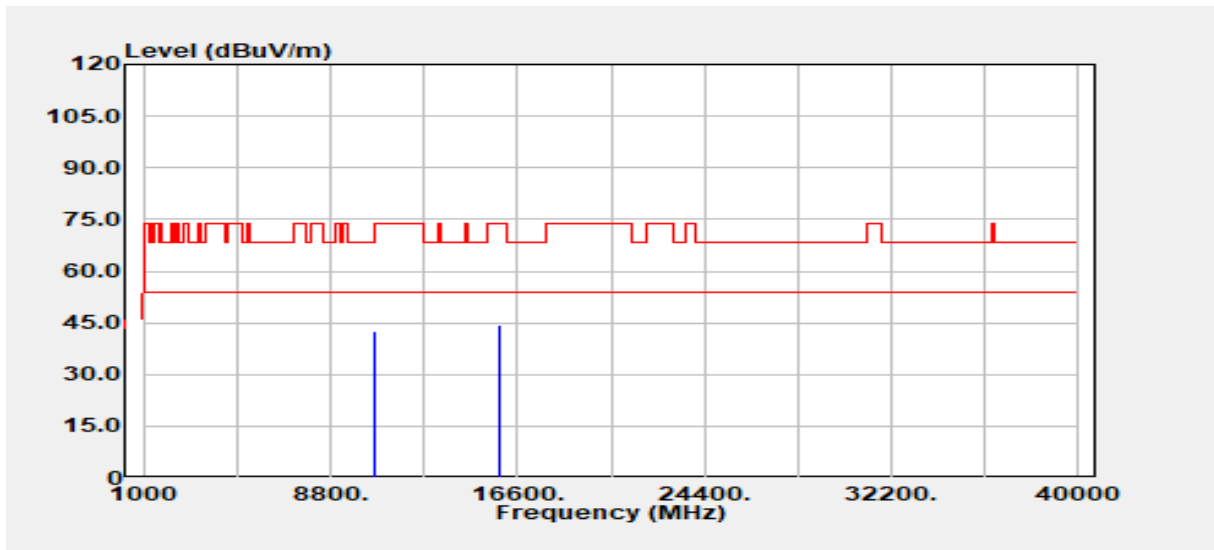


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	31.23	11.53	42.76	68.20	-25.44
15900.00	Peak	30.04	14.45	44.49	74.00	-29.51
15900.00	Average	24.19	14.45	38.64	54.00	-15.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

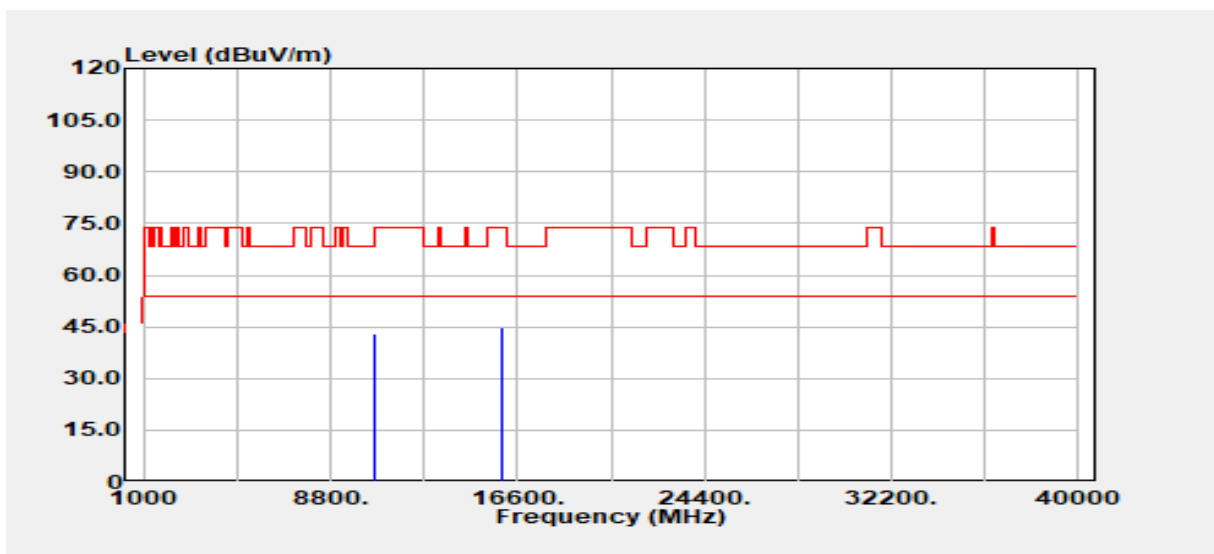


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	31.46	11.50	42.96	74.00	-31.04
10640.00	Average	24.77	11.50	36.28	54.00	-17.72
15960.00	Peak	29.70	15.09	44.79	74.00	-29.21
15960.00	Average	23.97	15.09	39.06	54.00	-14.94

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5320 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

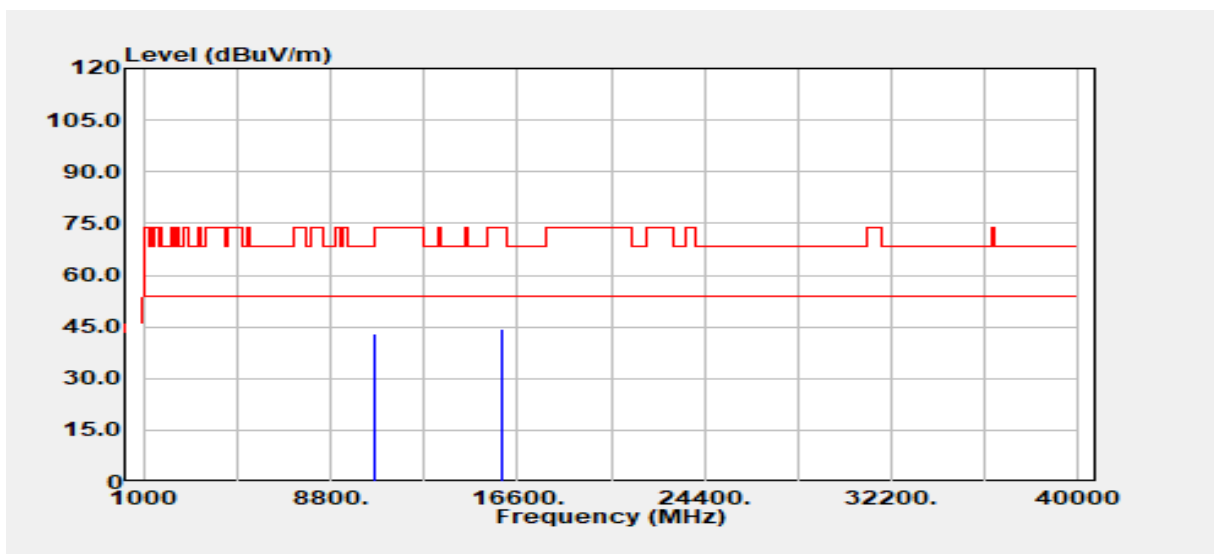


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	31.66	11.50	43.17	74.00	-30.83
10640.00	Average	24.72	11.50	36.22	54.00	-17.78
15960.00	Peak	29.34	15.09	44.43	74.00	-29.57
15960.00	Average	23.97	15.09	39.05	54.00	-14.95

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5270 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

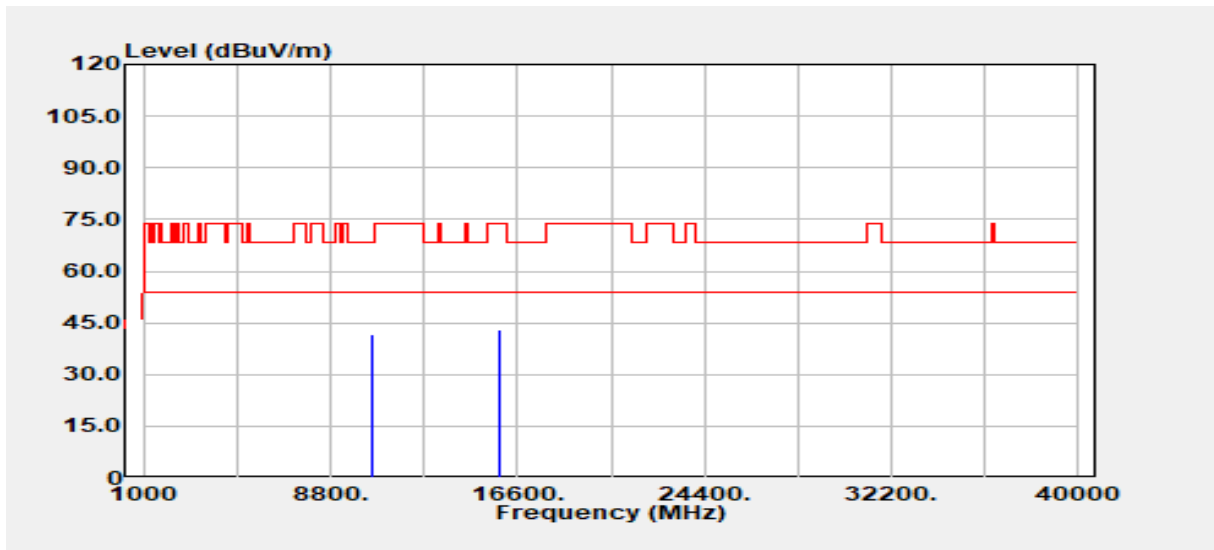


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	30.46	11.41	41.87	68.20	-26.33
15810.00	Peak	29.13	14.04	43.17	74.00	-30.83
15810.00	Average	22.30	14.04	36.34	54.00	-17.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5270 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

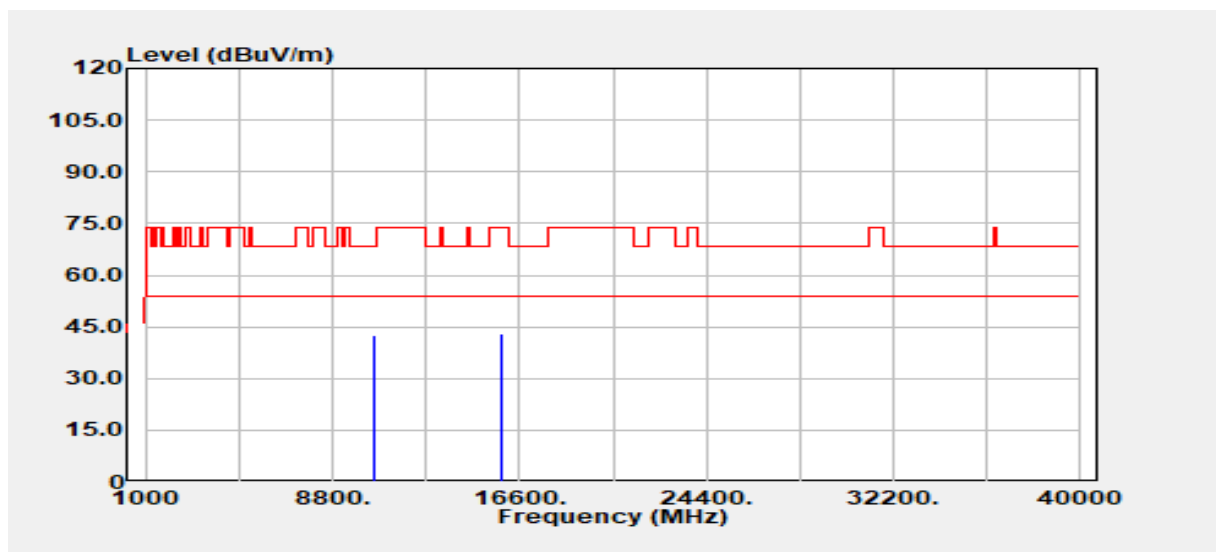


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10540.00	Peak	31.24	11.41	42.65	68.20	-25.55
15810.00	Peak	28.78	14.04	42.82	74.00	-31.18
15810.00	Average	22.21	14.04	36.25	54.00	-17.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

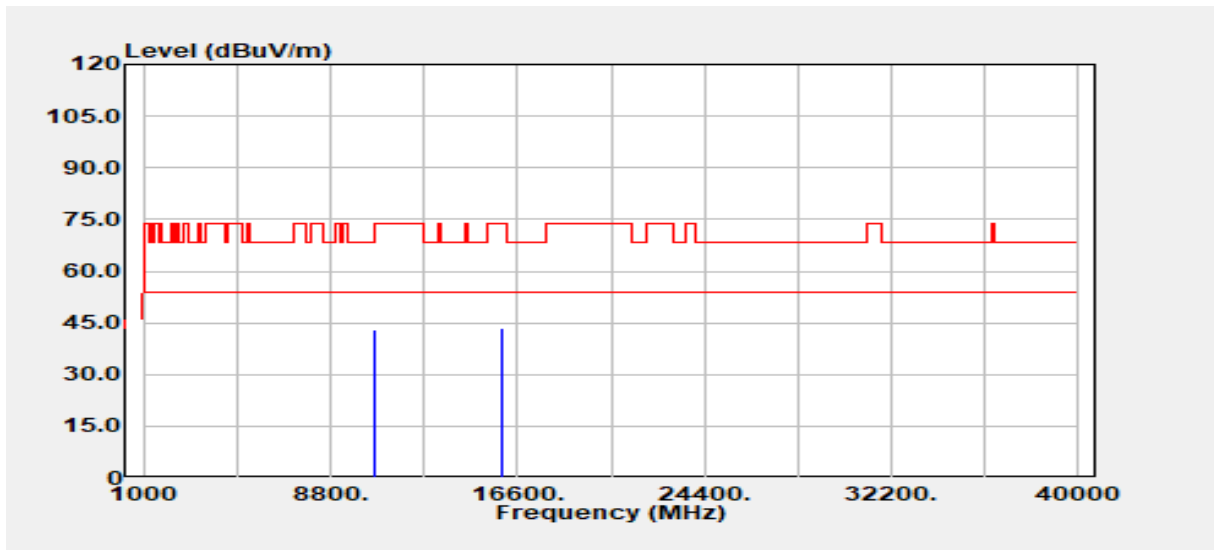


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10620.00	Peak	31.34	11.52	42.86	74.00	-31.14
10620.00	Average	23.60	11.52	35.11	54.00	-18.89
15930.00	Peak	28.62	14.81	43.43	74.00	-30.57
15930.00	Average	22.32	14.81	37.13	54.00	-16.87

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5310 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

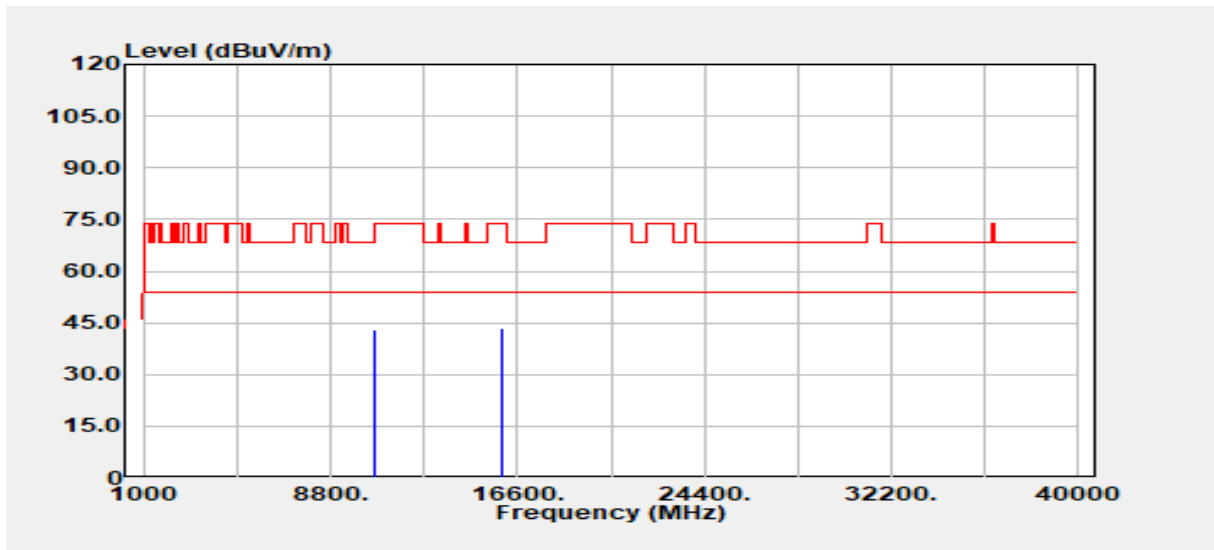


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10620.00	Peak	31.63	11.52	43.14	74.00	-30.86
10620.00	Average	23.89	11.52	35.40	54.00	-18.60
15930.00	Peak	28.46	14.81	43.27	74.00	-30.73
15930.00	Average	22.23	14.81	37.04	54.00	-16.96

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

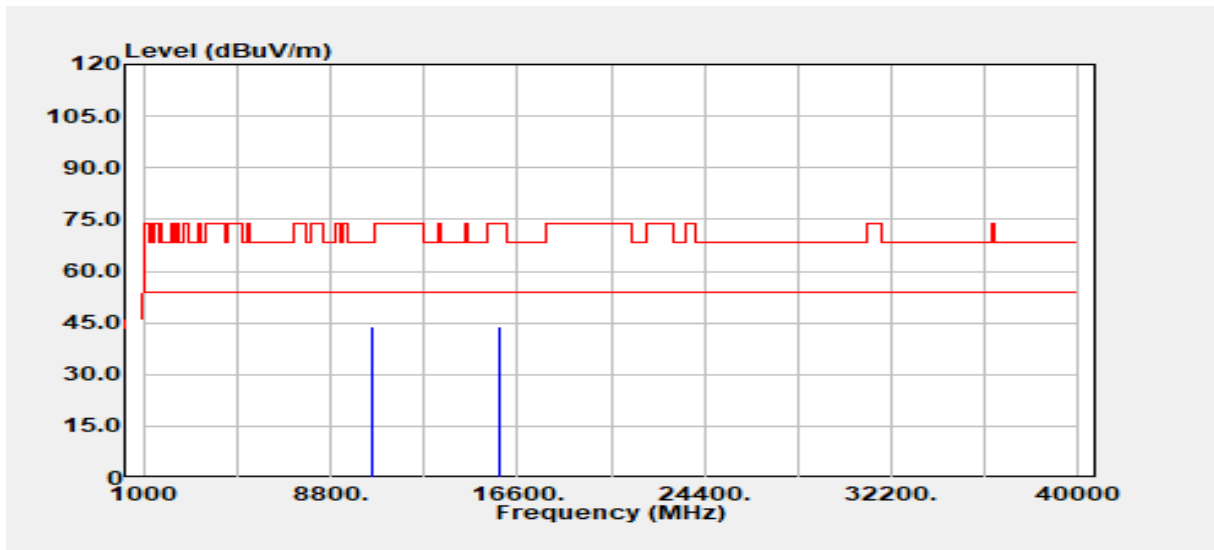


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10580.00	Peak	32.52	11.48	44.00	68.20	-24.20
15870.00	Peak	29.54	14.34	43.88	74.00	-30.12
15870.00	Average	23.76	14.34	38.10	54.00	-15.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

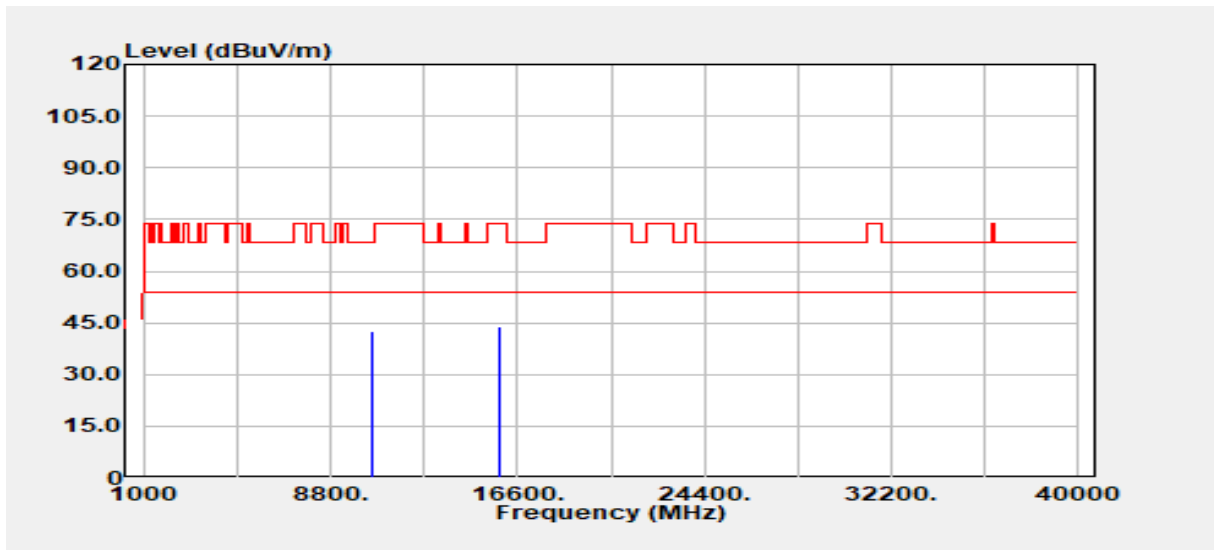


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10580.00	Peak	31.09	11.48	42.57	68.20	-25.63
15870.00	Peak	29.59	14.34	43.93	74.00	-30.07
15870.00	Average	23.98	14.34	38.32	54.00	-15.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

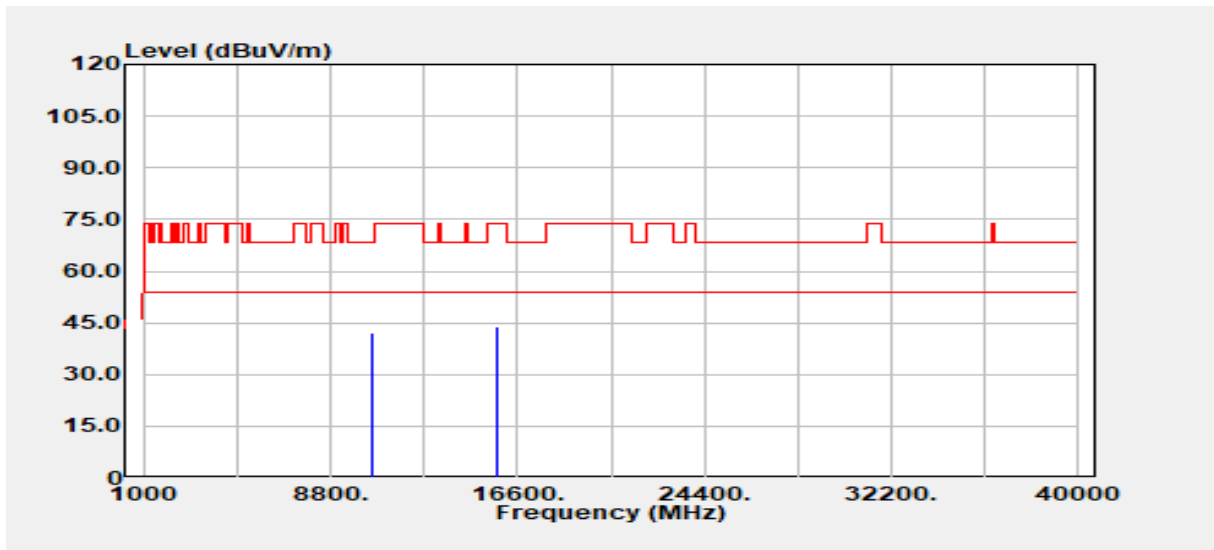


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10500.00	Peak	30.76	11.41	42.17	68.20	-26.03
15750.00	Peak	29.85	14.22	44.07	74.00	-29.93
15750.00	Average	20.09	14.22	34.31	54.00	-19.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 5250 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

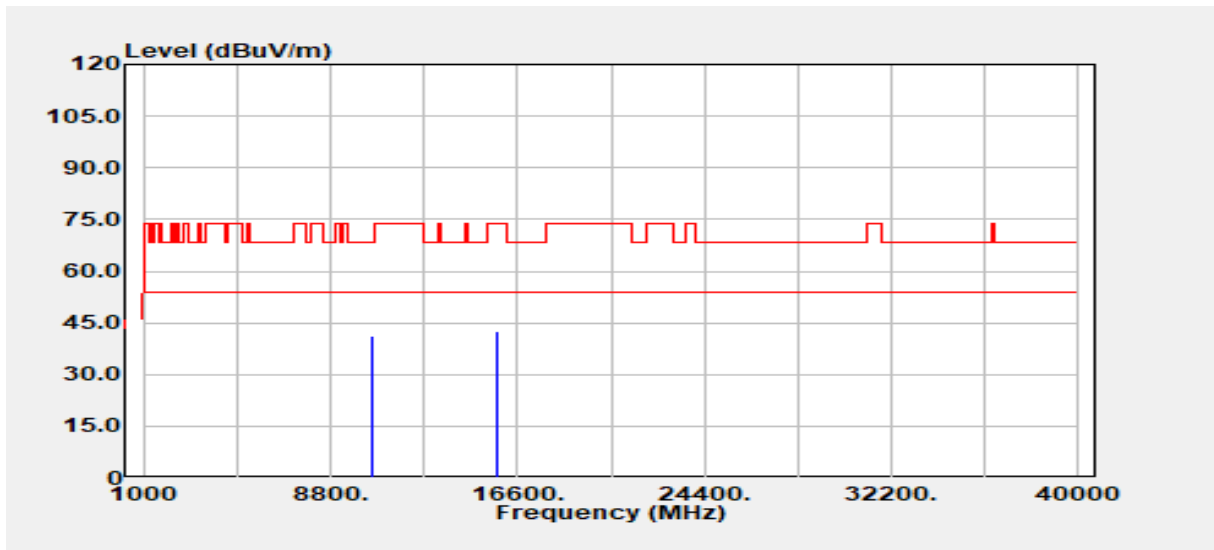


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10500.00	Peak	29.67	11.41	41.08	68.20	-27.12
15750.00	Peak	28.24	14.22	42.46	74.00	-31.54
15750.00	Average	20.24	14.22	34.46	54.00	-19.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

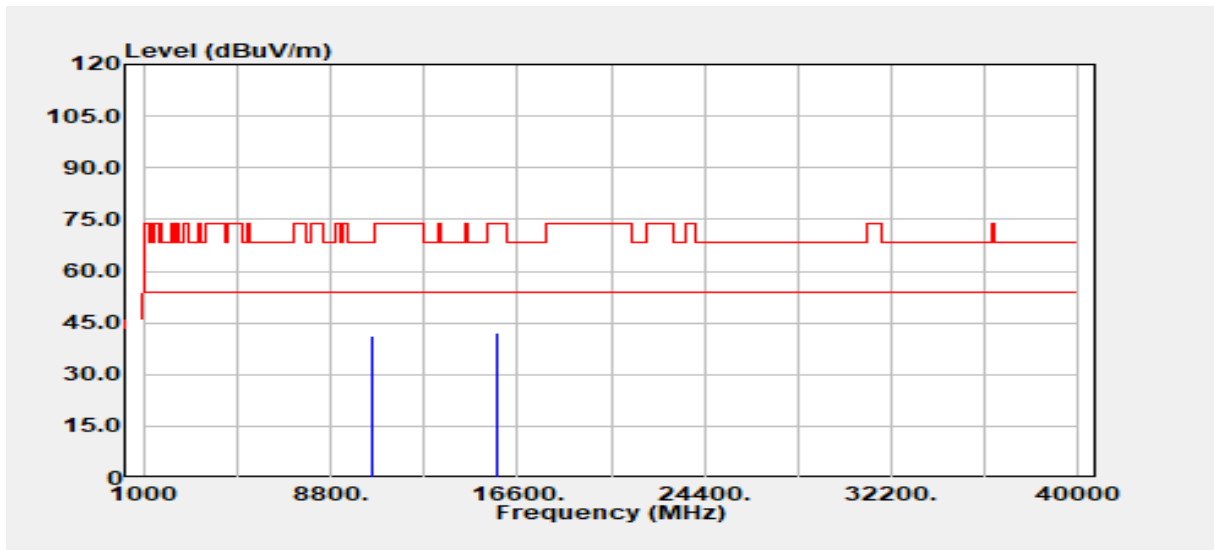


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	29.88	11.41	41.29	68.20	-26.91
15780.00	Peak	28.23	14.08	42.31	74.00	-31.69
15780.00	Average	22.16	14.08	36.24	54.00	-17.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5260 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

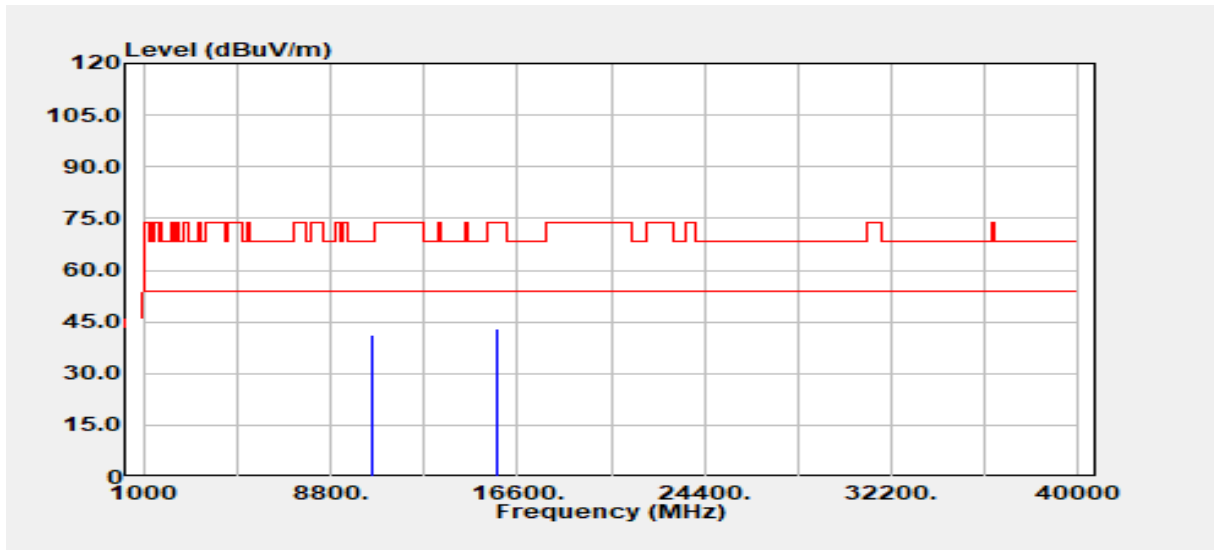


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10520.00	Peak	29.70	11.41	41.11	68.20	-27.09
15780.00	Peak	29.09	14.08	43.17	74.00	-30.83
15780.00	Average	22.57	14.08	36.65	54.00	-17.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

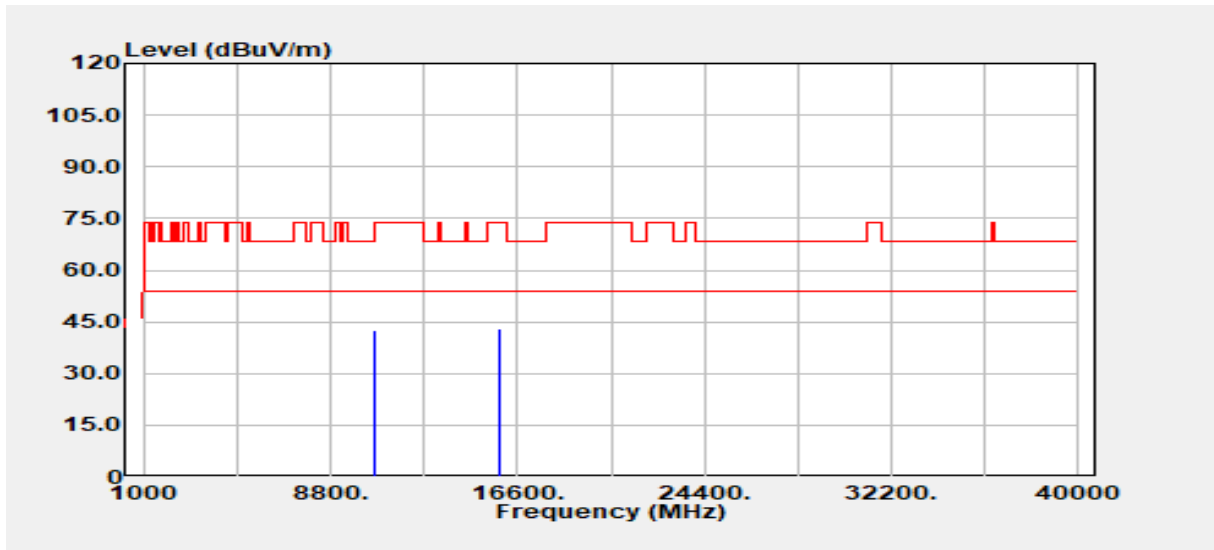


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10600.00	Peak	30.93	11.53	42.46	68.20	-25.74
15900.00	Peak	28.59	14.45	43.04	74.00	-30.96
15900.00	Average	21.27	14.45	35.72	54.00	-18.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5300 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

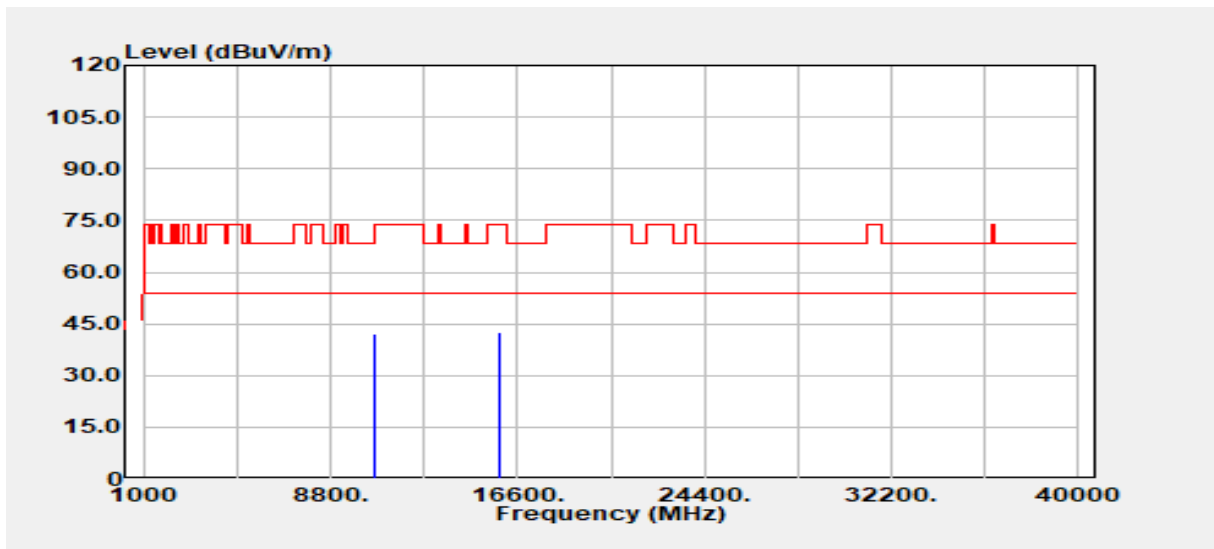


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10600.00	Peak	30.44	11.53	41.97	68.20	-26.23
15900.00	Peak	28.15	14.45	42.60	74.00	-31.40
15900.00	Average	21.19	14.45	35.64	54.00	-18.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

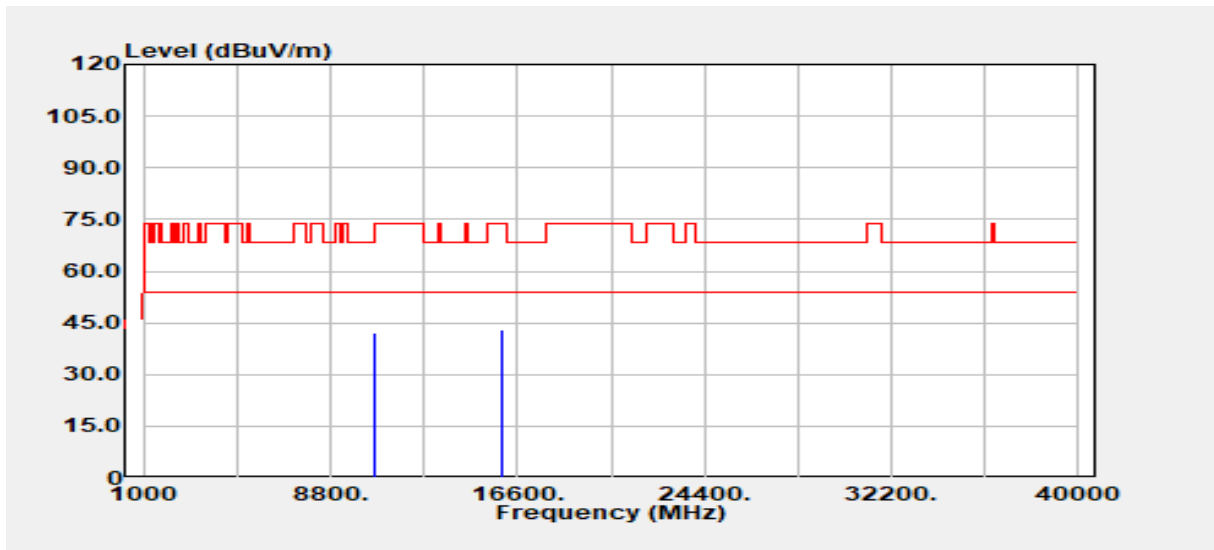


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	30.51	11.50	42.01	74.00	-31.99
15960.00	Peak	27.87	15.09	42.96	74.00	-31.04
15960.00	Average	20.68	15.09	35.77	54.00	-18.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5320 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

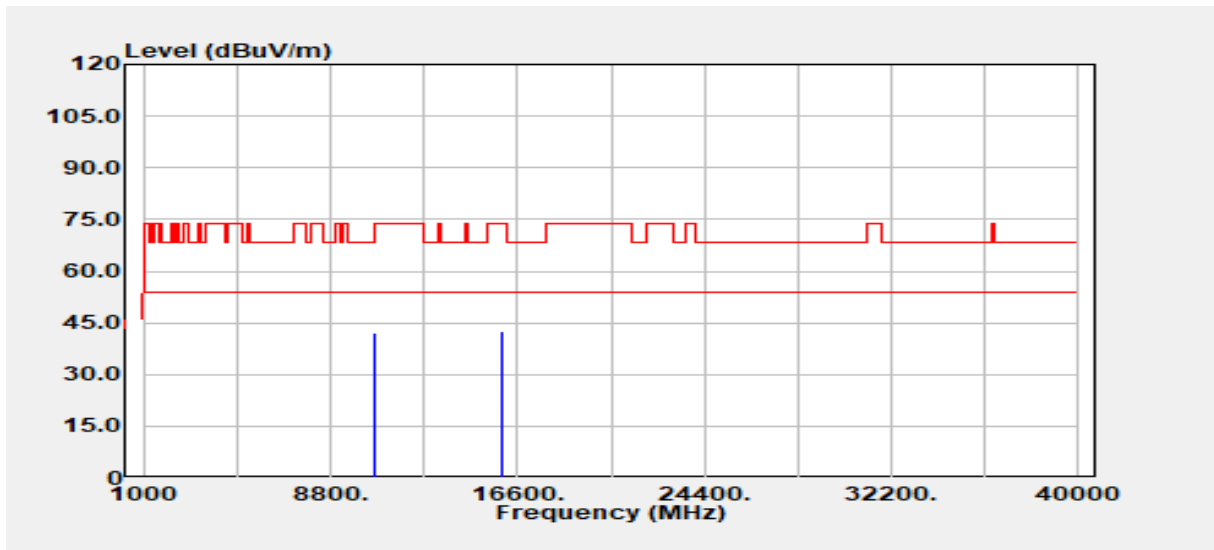


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10640.00	Peak	30.63	11.50	42.13	74.00	-31.87
15960.00	Peak	27.65	15.09	42.74	74.00	-31.26
15960.00	Average	20.73	15.09	35.82	54.00	-18.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

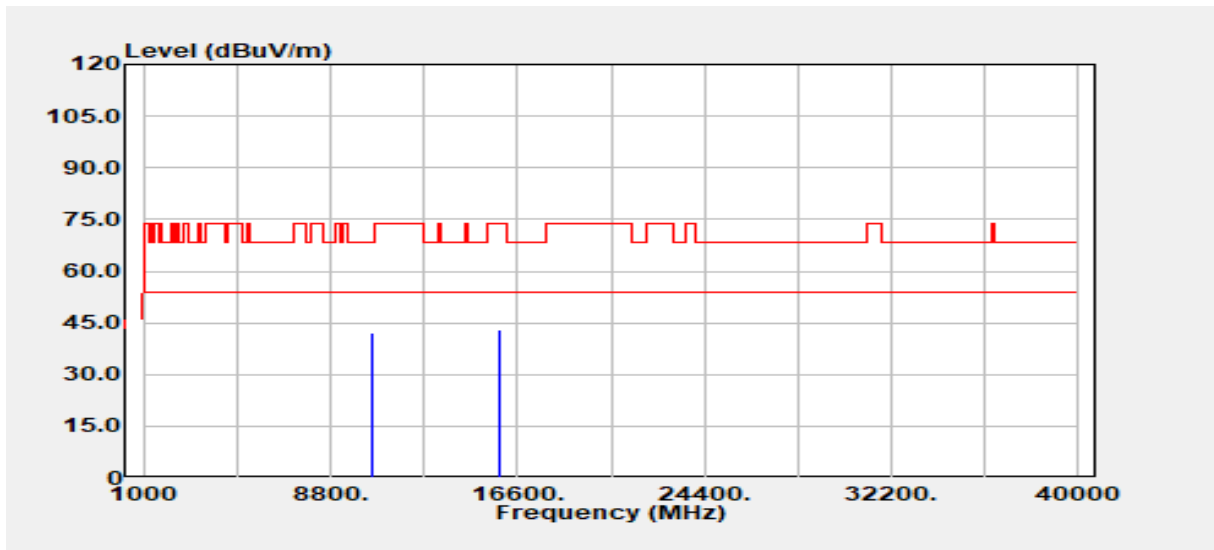


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	30.74	11.41	42.15	68.20	-26.05
15810.00	Peak	28.81	14.04	42.85	74.00	-31.15
15810.00	Average	21.27	14.04	35.31	54.00	-18.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5270 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

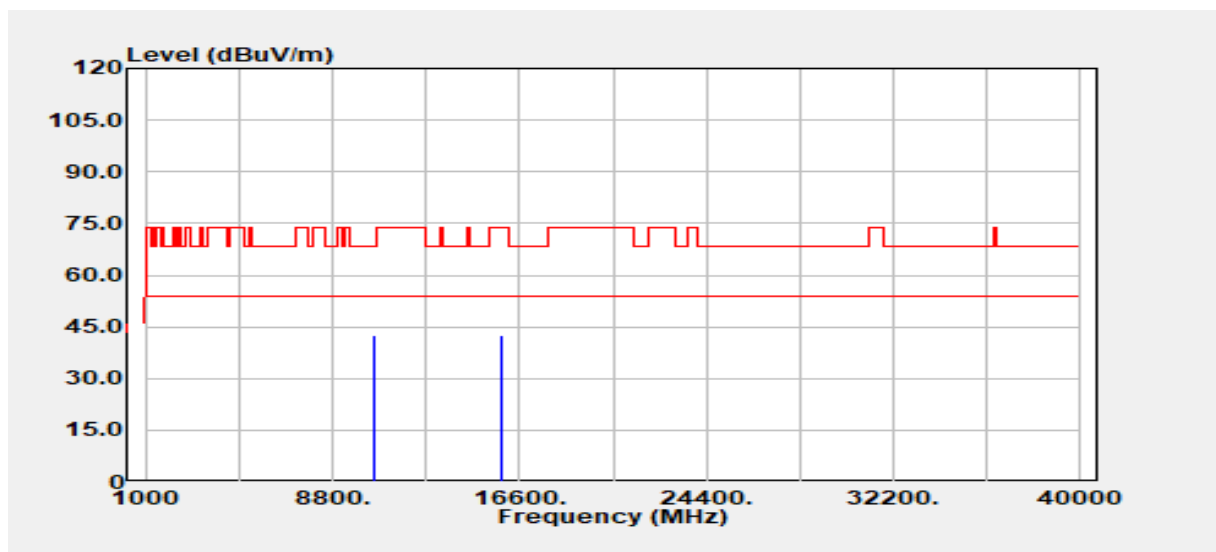


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10540.00	Peak	31.09	11.41	42.50	68.20	-25.70
15810.00	Peak	28.53	14.04	42.57	74.00	-31.43
15810.00	Average	21.19	14.04	35.23	54.00	-18.77
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

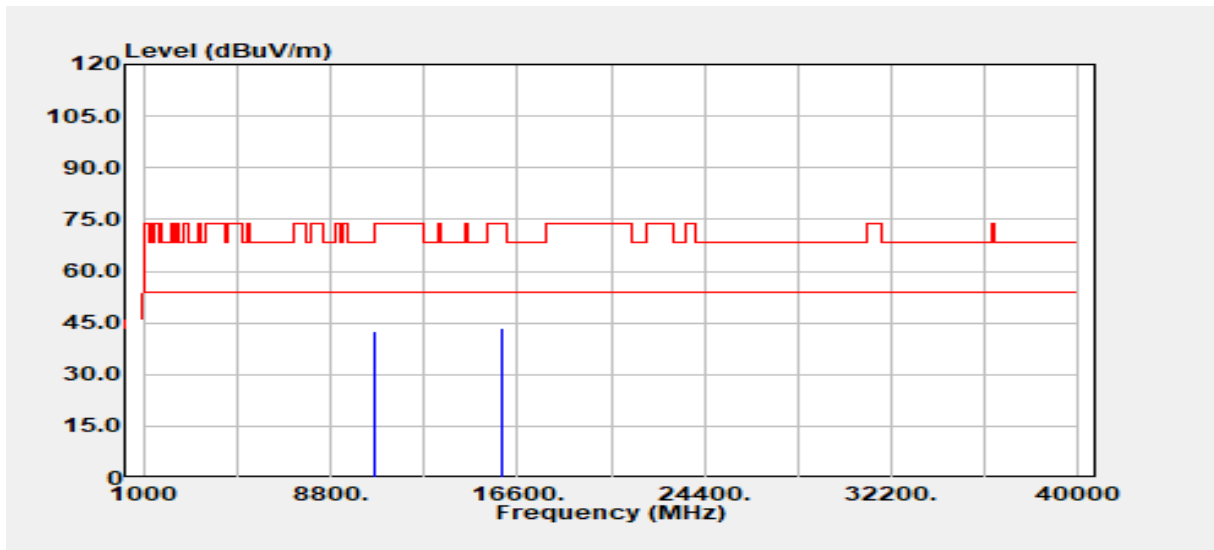


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	31.05	11.52	42.56	74.00	-31.44
10620.00	Average	24.39	11.52	35.91	54.00	-18.09
15930.00	Peak	28.54	14.81	43.35	74.00	-30.65
15930.00	Average	20.73	14.81	35.54	54.00	-18.46

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5310 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

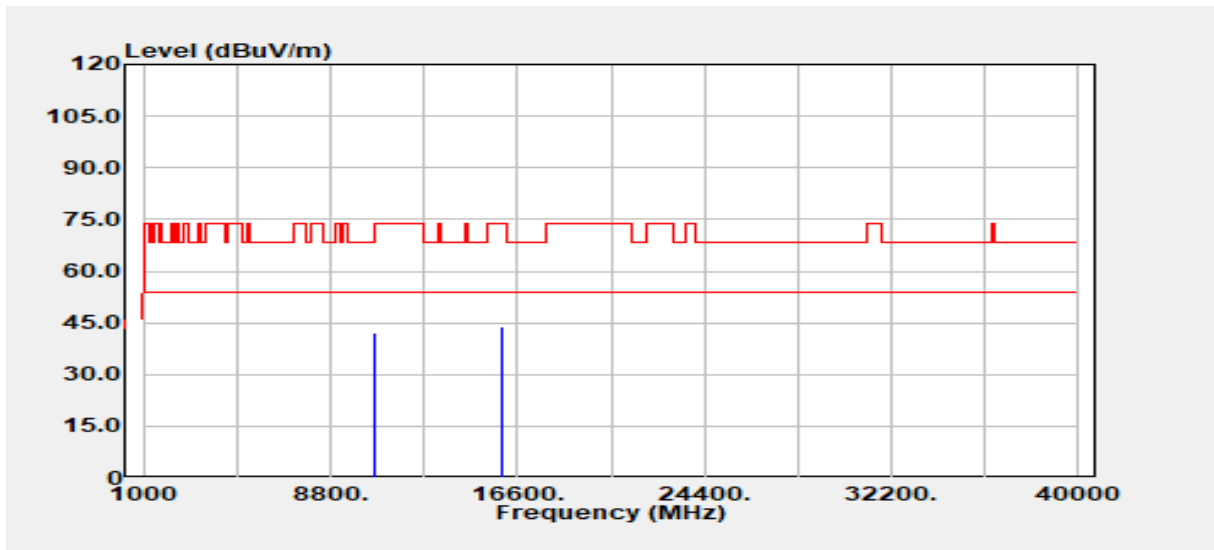


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10620.00	Peak	30.82	11.52	42.33	74.00	-31.67
10620.00	Average	23.75	11.52	35.27	54.00	-18.73
15930.00	Peak	29.13	14.81	43.94	74.00	-30.06
15930.00	Average	21.32	14.81	36.13	54.00	-17.87

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

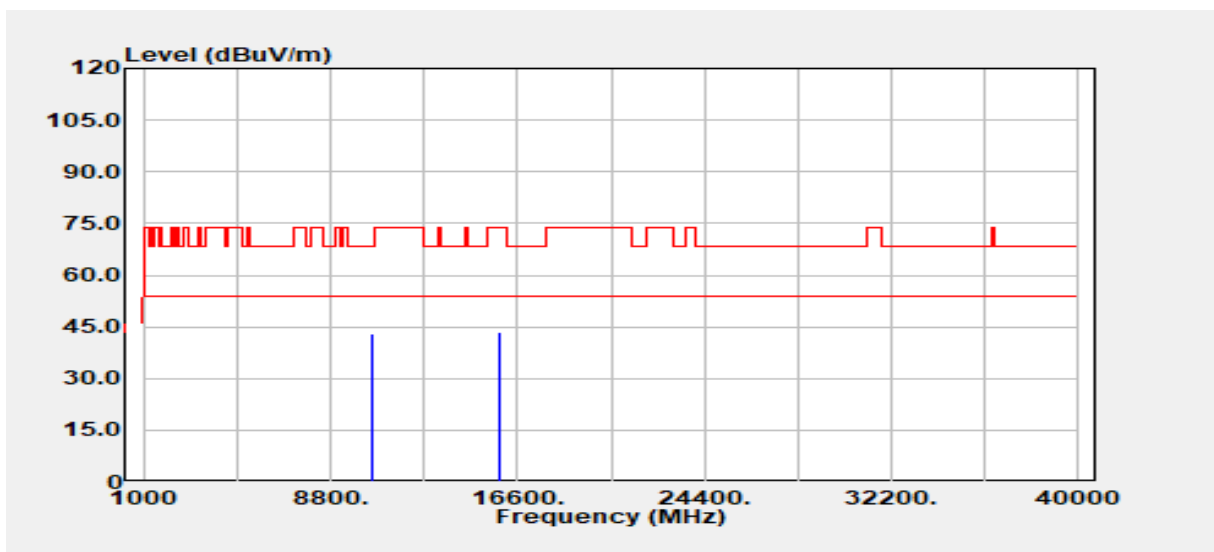


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	31.45	11.48	42.93	68.20	-25.27
15870.00	Peak	28.95	14.34	43.29	74.00	-30.71
15870.00	Average	22.15	14.34	36.49	54.00	-17.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5290 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

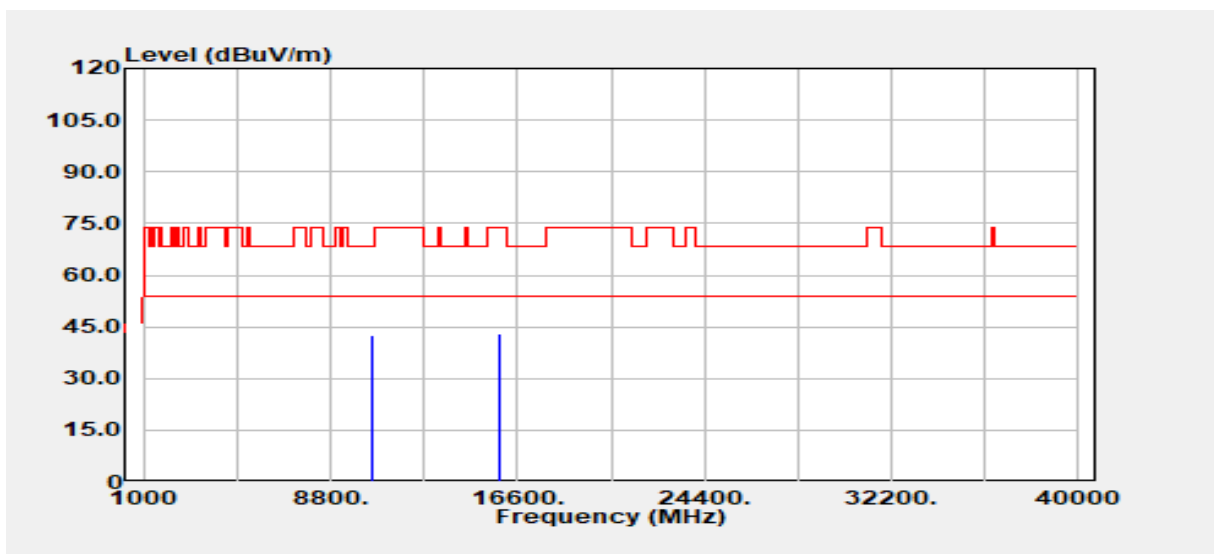


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10580.00	Peak	31.14	11.48	42.62	68.20	-25.58
15870.00	Peak	28.54	14.34	42.88	74.00	-31.12
15870.00	Average	22.46	14.34	36.80	54.00	-17.20
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

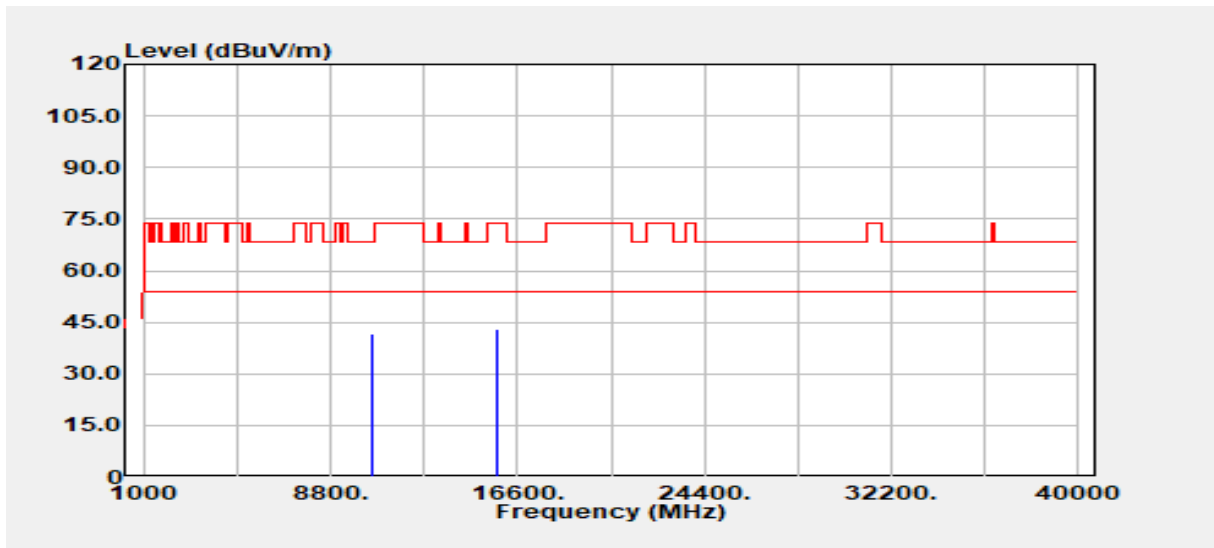


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
10500.00	Peak	30.14	11.41	41.55	68.20	-26.65
15750.00	Peak	28.98	14.22	43.20	74.00	-30.80
15750.00	Average	22.54	14.22	36.76	54.00	-17.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5250 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

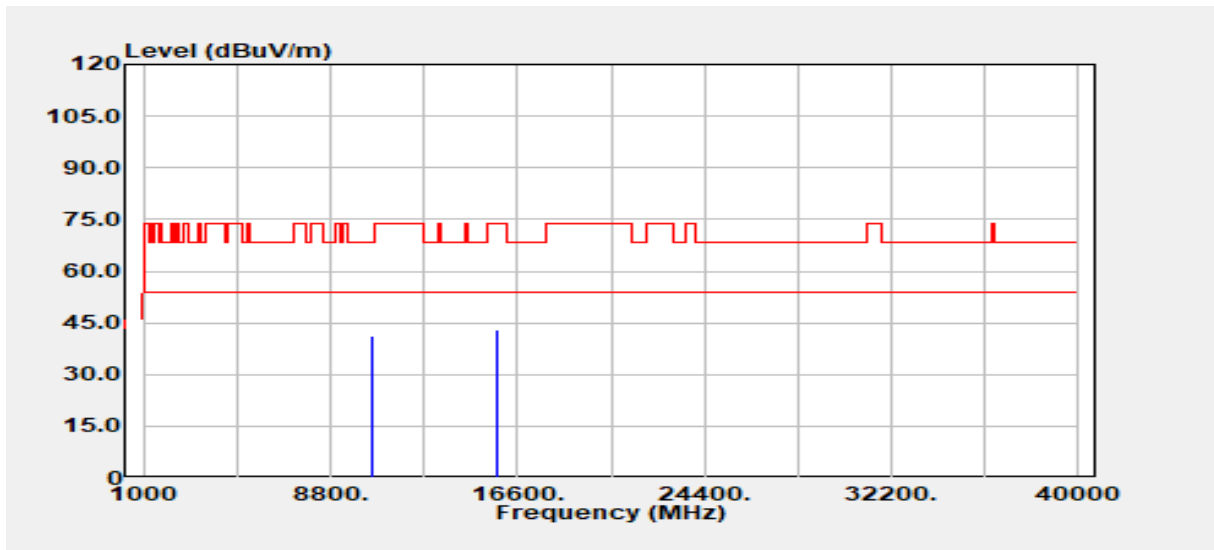


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
10500.00	Peak	29.66	11.41	41.07	68.20	-27.13
15750.00	Peak	28.82	14.22	43.04	74.00	-30.96
15750.00	Average	22.26	14.22	36.48	54.00	-17.52
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-2c

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

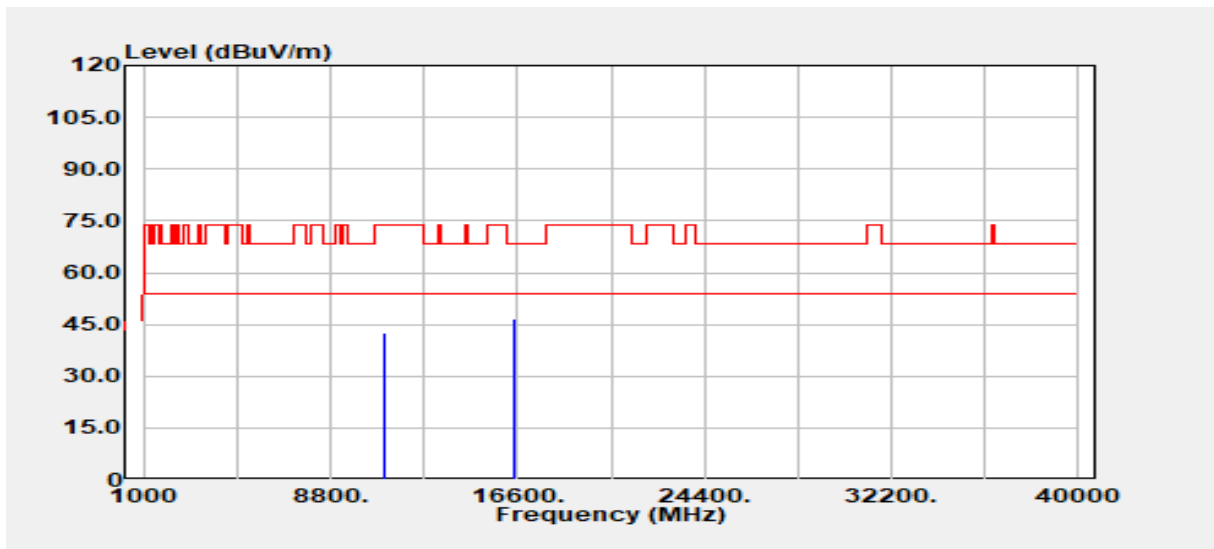


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	30.30	12.42	42.72	74.00	-31.28
11000.00	Average	24.43	12.42	36.85	54.00	-17.15
16500.00	Peak	28.15	18.70	46.85	68.20	-21.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5500 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

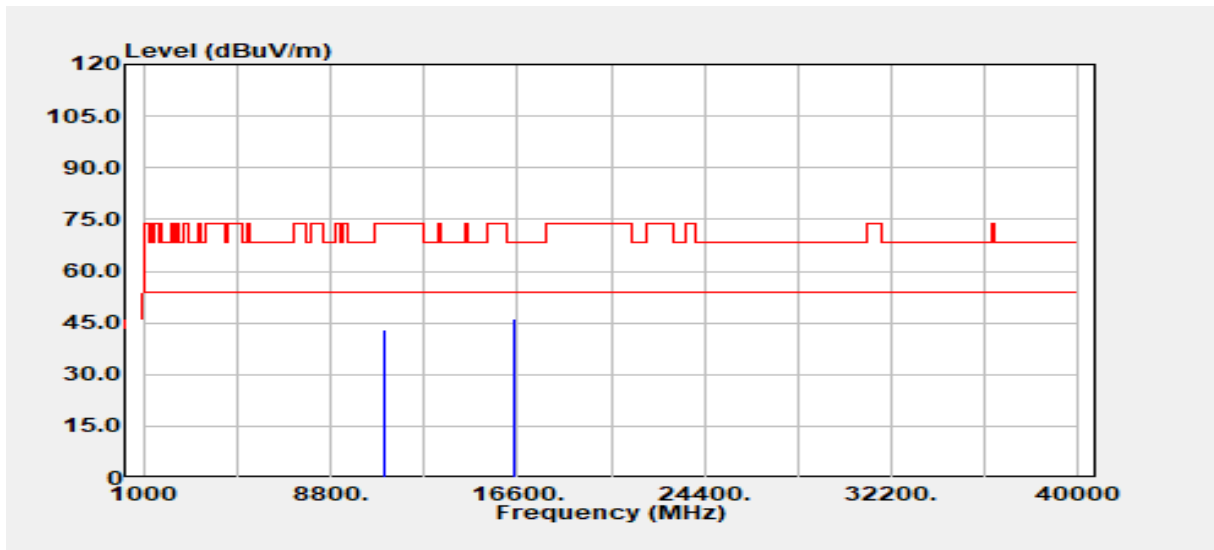


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	30.56	12.42	42.98	74.00	-31.02
11000.00	Average	24.46	12.42	36.88	54.00	-17.12
16500.00	Peak	27.70	18.70	46.40	68.20	-21.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5580 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

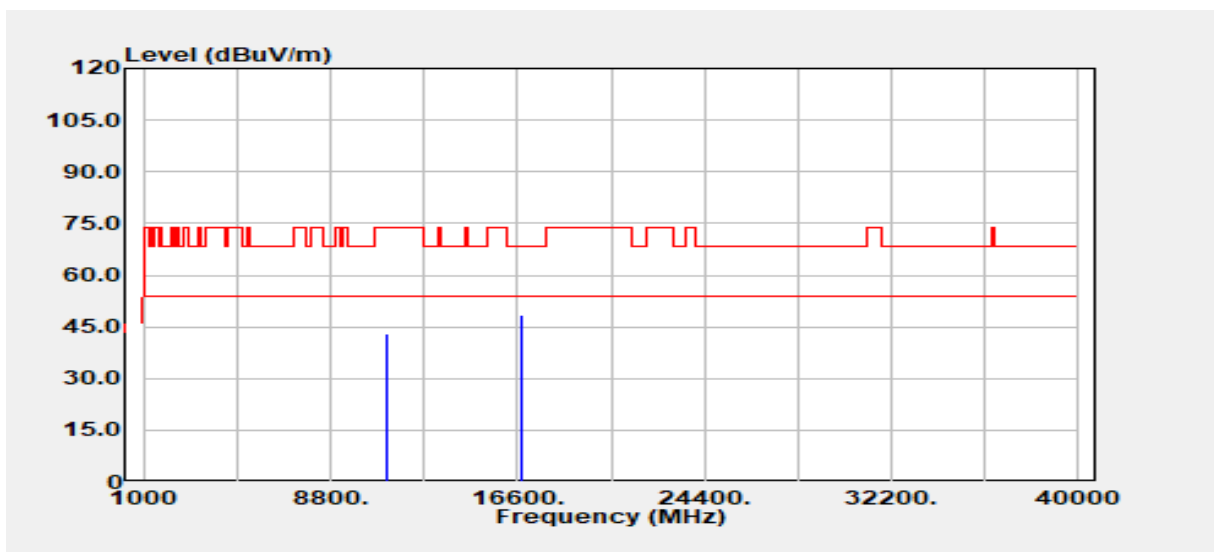


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11160.00	Peak	30.69	12.48	43.17	74.00	-30.83
11160.00	Average	24.71	12.48	37.19	54.00	-16.81
16740.00	Peak	27.76	20.88	48.63	68.20	-19.57
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5580 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

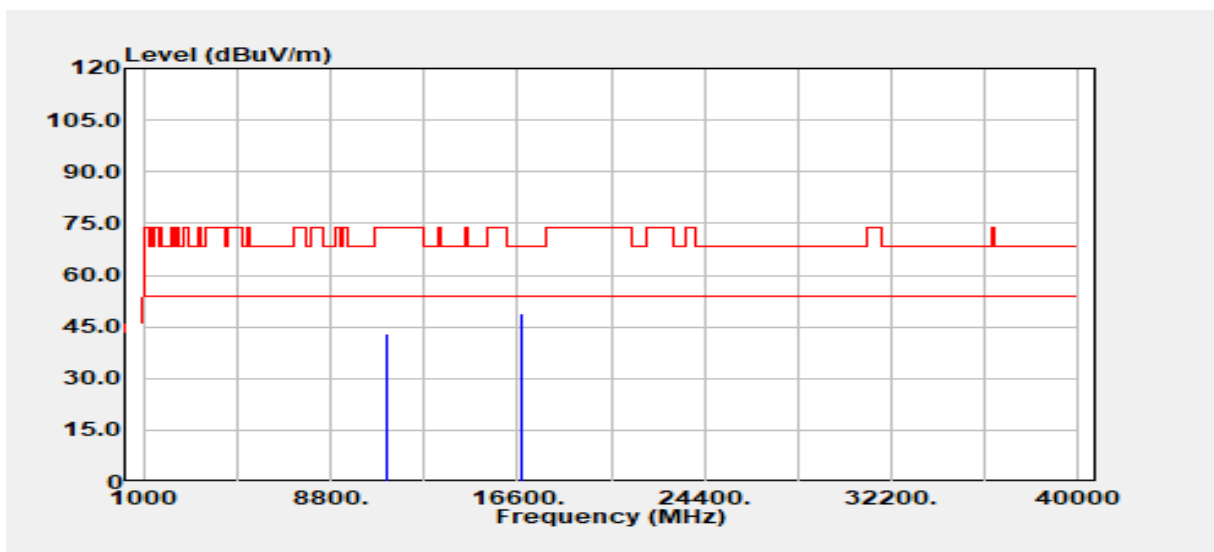


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11160.00	Peak	30.65	12.48	43.12	74.00	-30.88
11160.00	Average	24.75	12.48	37.22	54.00	-16.78
16740.00	Peak	28.01	20.88	48.88	68.20	-19.32
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

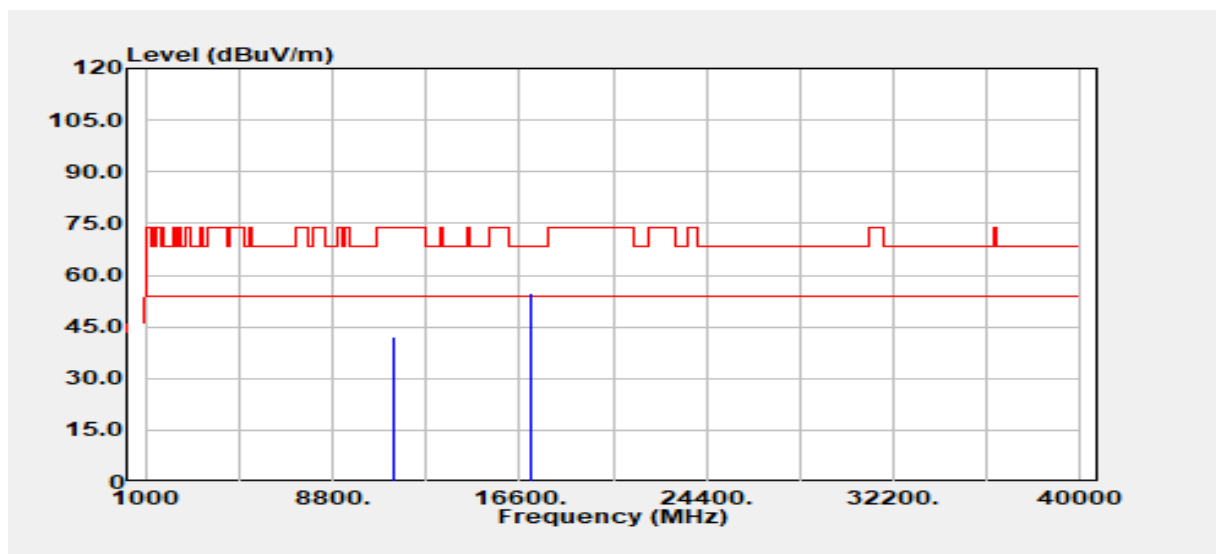


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	29.73	12.39	42.12	74.00	-31.88
11400.00	Average	24.64	12.39	37.03	54.00	-16.97
17100.00	Peak	29.05	25.62	54.67	68.20	-13.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5700 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

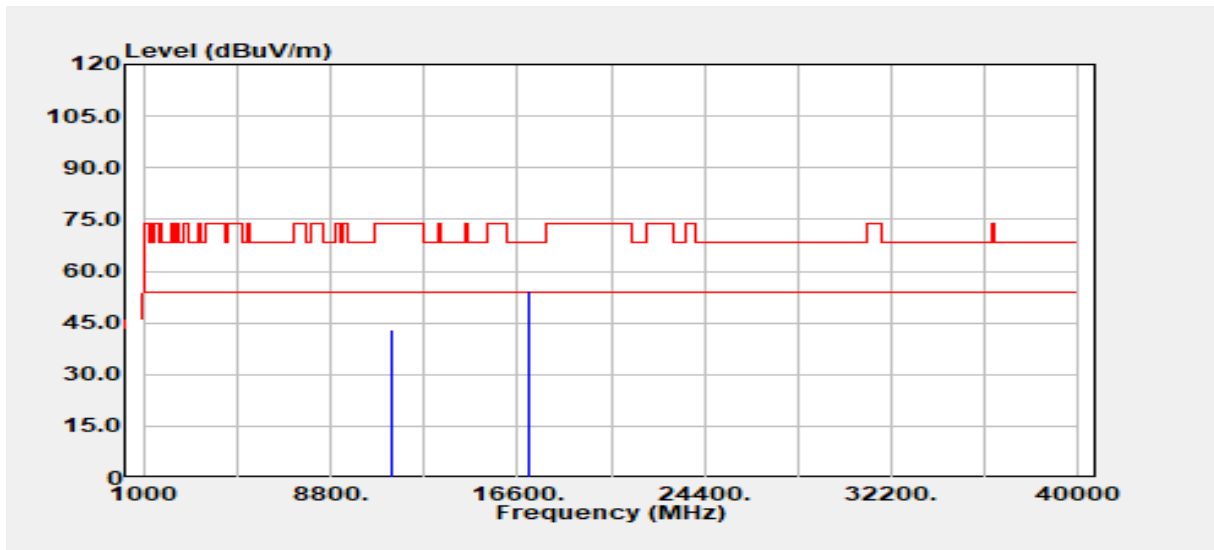


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11400.00	Peak	30.52	12.39	42.91	74.00	-31.09
11400.00	Average	24.56	12.39	36.95	54.00	-17.05
17100.00	Peak	28.62	25.62	54.24	68.20	-13.96
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

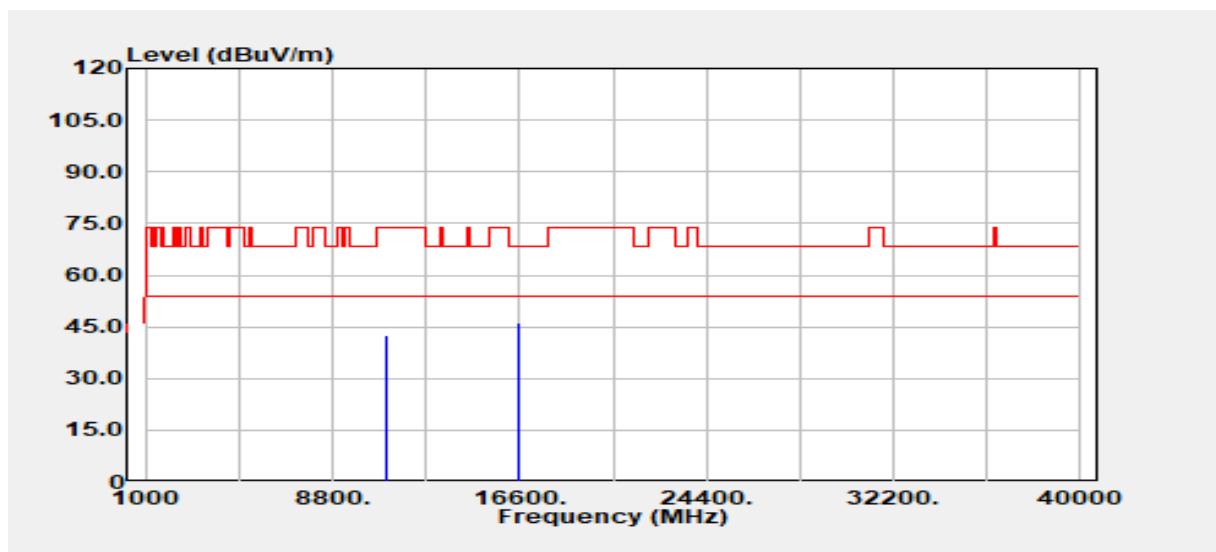


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	30.29	12.39	42.68	74.00	-31.32
11020.00	Average	23.10	12.39	35.49	54.00	-18.51
16530.00	Peak	27.32	18.66	45.98	68.20	-22.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5510 MHz	Temp/Hum	23.9(°C) / 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

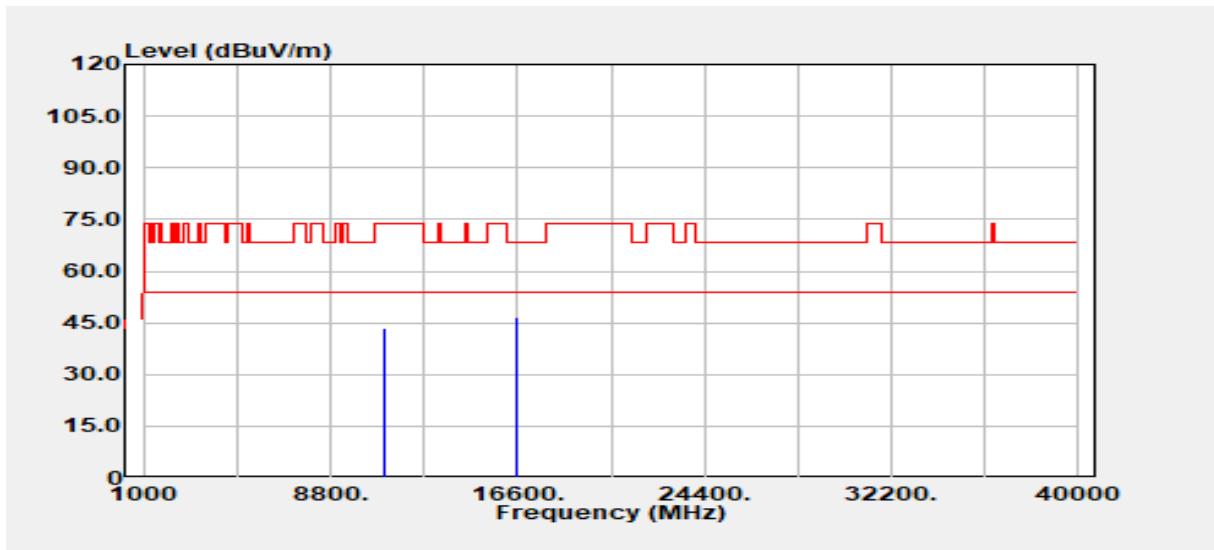


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11020.00	Peak	31.07	12.39	43.46	74.00	-30.54
11020.00	Average	23.33	12.39	35.72	54.00	-18.28
16530.00	Peak	28.11	18.66	46.78	68.20	-21.42
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5550 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

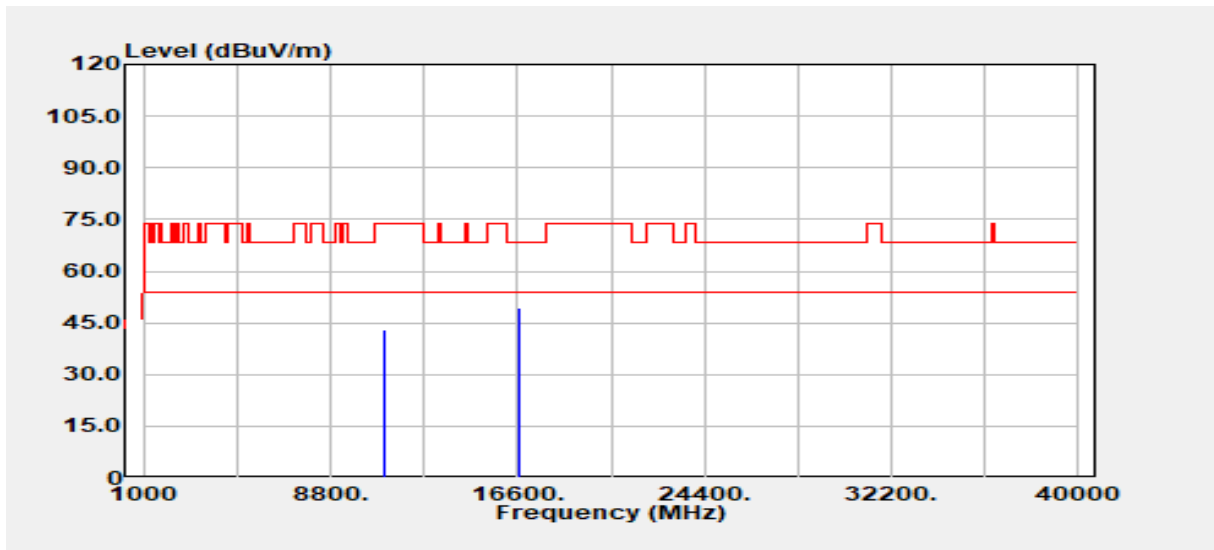


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	30.48	12.60	43.08	74.00	-30.92
11100.00	Average	23.20	12.60	35.80	54.00	-18.20
16650.00	Peak	29.18	19.99	49.17	68.20	-19.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5550 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

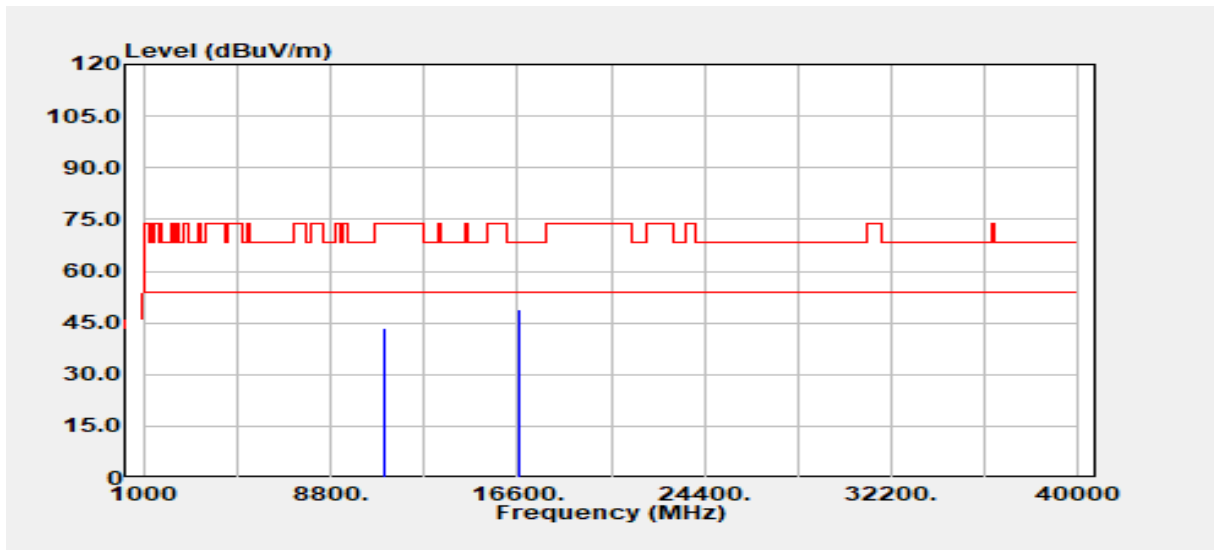


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	30.96	12.60	43.56	74.00	-30.44
11100.00	Average	23.22	12.60	35.82	54.00	-18.18
16650.00	Peak	28.73	19.99	48.71	68.20	-19.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

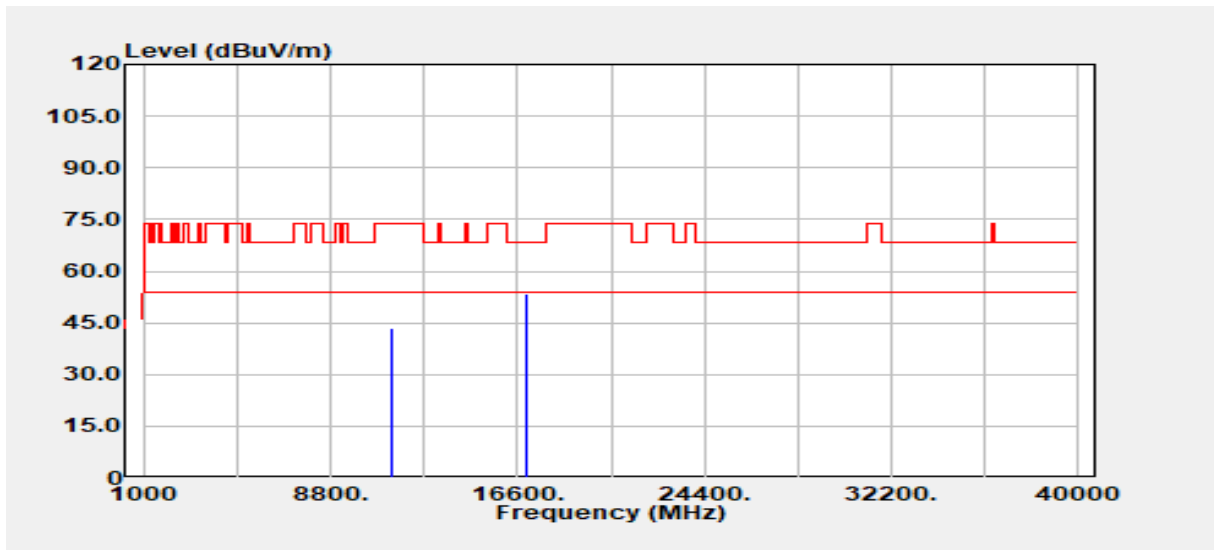


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11340.00	Peak	30.70	12.55	43.25	74.00	-30.75
11340.00	Average	22.91	12.55	35.46	54.00	-18.54
17010.00	Peak	28.13	25.32	53.45	68.20	-14.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 / 5670 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

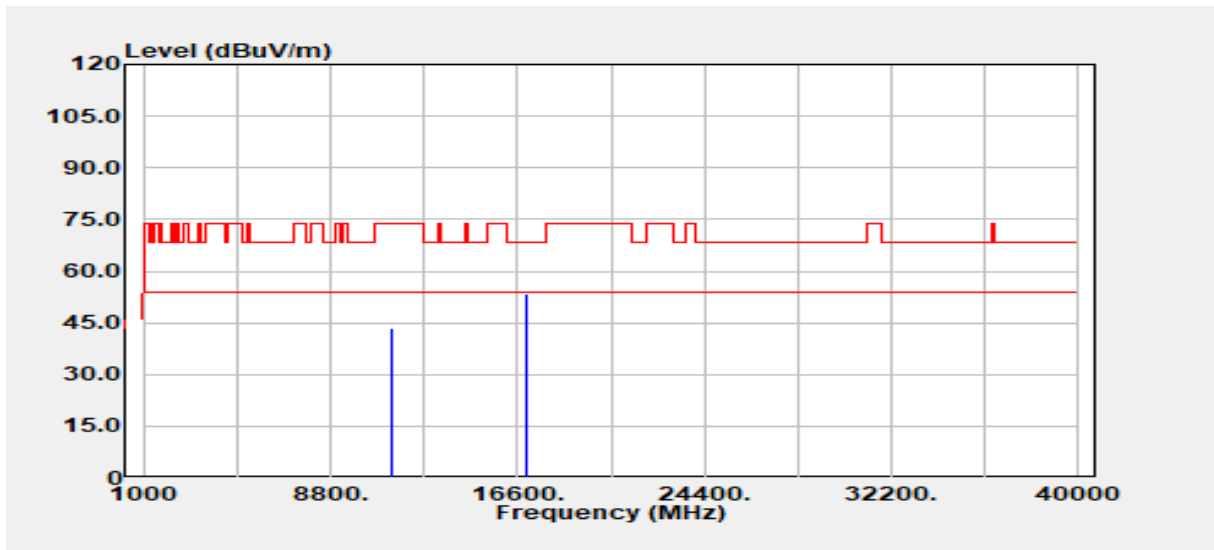


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	30.94	12.55	43.49	74.00	-30.51
11340.00	Average	22.94	12.55	35.49	54.00	-18.51
17010.00	Peak	27.98	25.32	53.30	68.20	-14.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

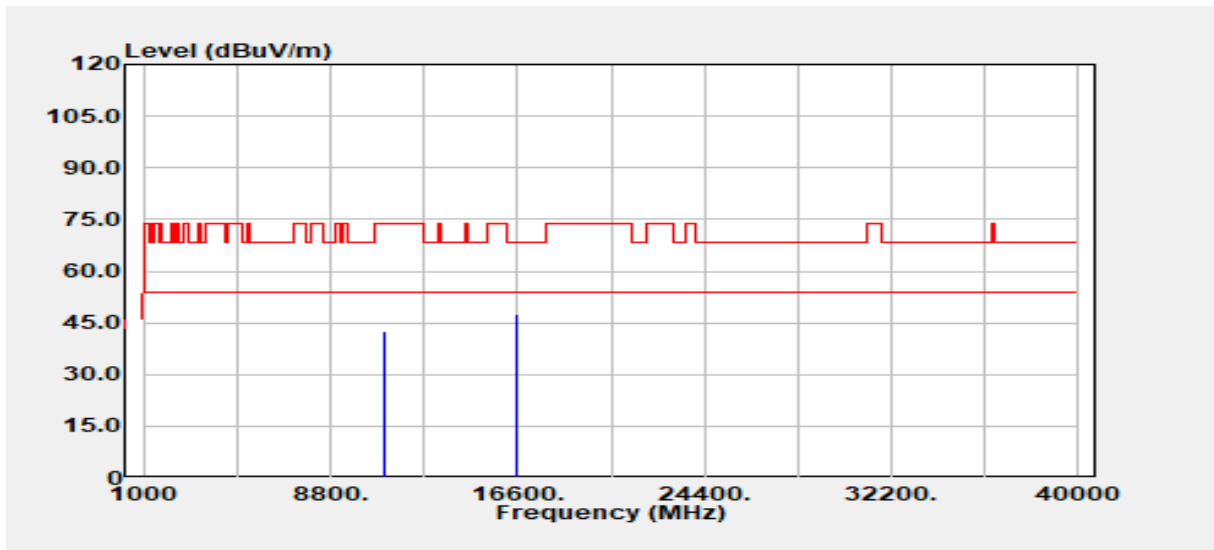


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB μ V)	Factor (dB)	Actual FS (dB μ V/m)	Limit @3m (dB μ V/m)	Margin (dB)
11060.00	Peak	30.01	12.40	42.41	74.00	-31.59
11060.00	Average	23.99	12.40	36.39	54.00	-17.61
16590.00	Peak	28.10	19.22	47.32	68.20	-20.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

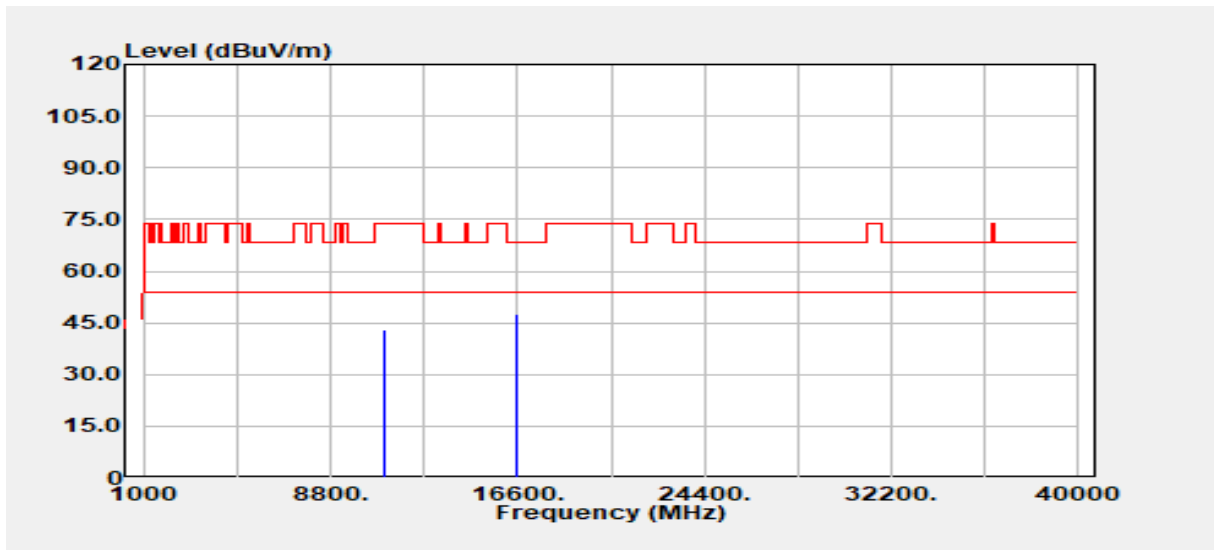


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11060.00	Peak	30.78	12.40	43.18	74.00	-30.82
11060.00	Average	23.70	12.40	36.10	54.00	-17.90
16590.00	Peak	28.55	19.22	47.77	68.20	-20.43
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

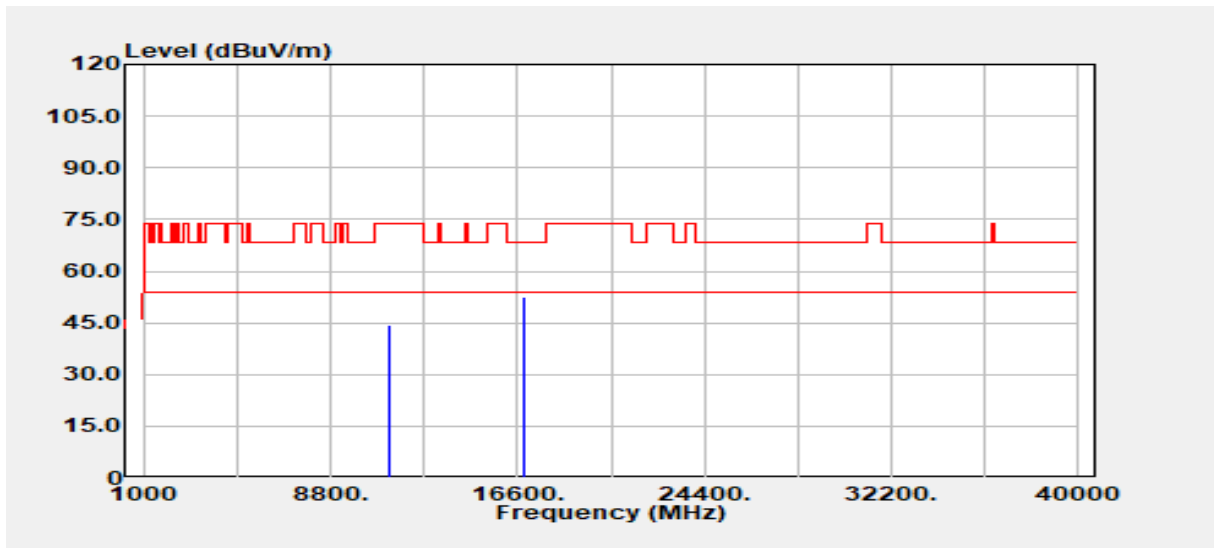


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11220.00	Peak	31.75	12.60	44.36	74.00	-29.64
11220.00	Average	23.63	12.60	36.24	54.00	-17.76
16830.00	Peak	30.33	22.01	52.33	68.20	-15.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	23.9(°C)/ 63%RH
Test Item	Harmonic	Test Date	May 19, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

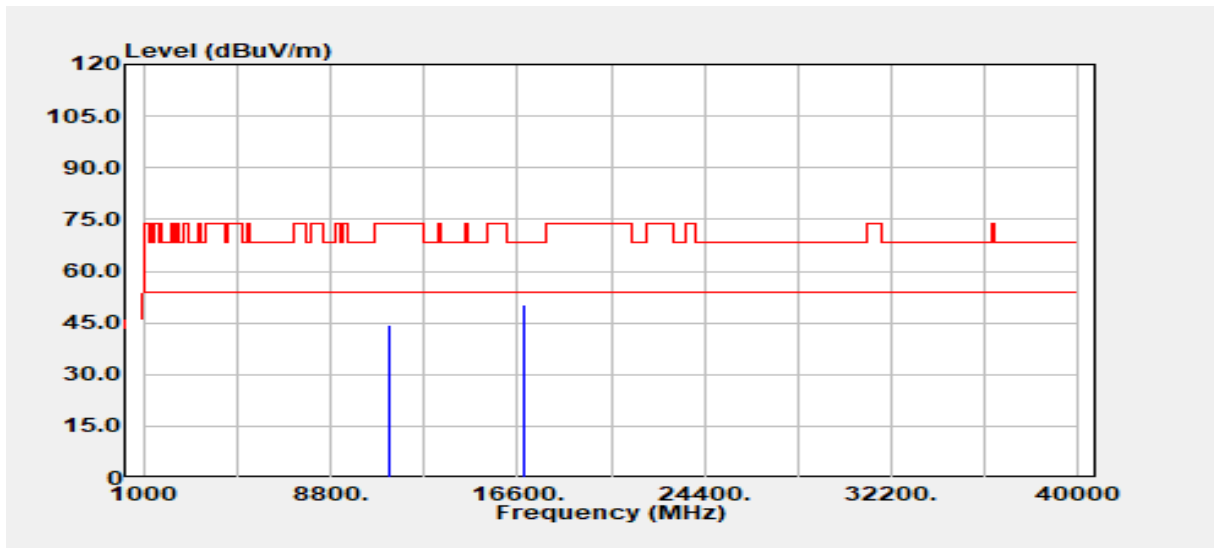


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11220.00	Peak	31.74	12.60	44.35	74.00	-29.65
11220.00	Average	23.83	12.60	36.43	54.00	-17.57
16830.00	Peak	28.29	22.01	50.30	68.20	-17.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 570 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

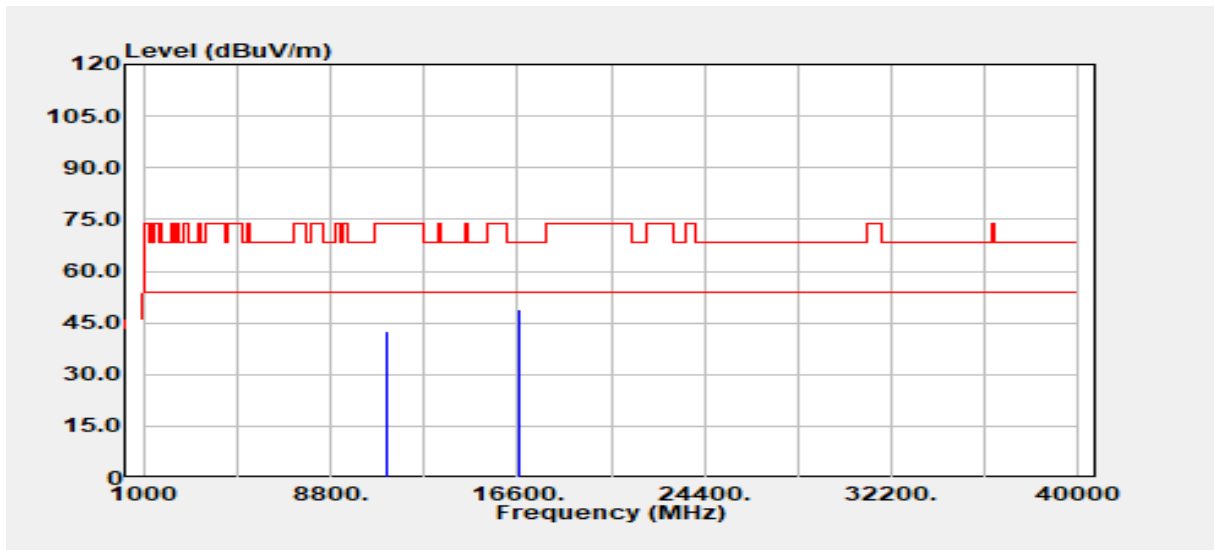


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11140.00	Peak	30.19	12.49	42.68	74.00	-31.32
11140.00	Average	24.80	12.49	37.29	54.00	-16.71
16710.00	Peak	28.12	20.67	48.79	68.20	-19.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ac VHT160 / 5570 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

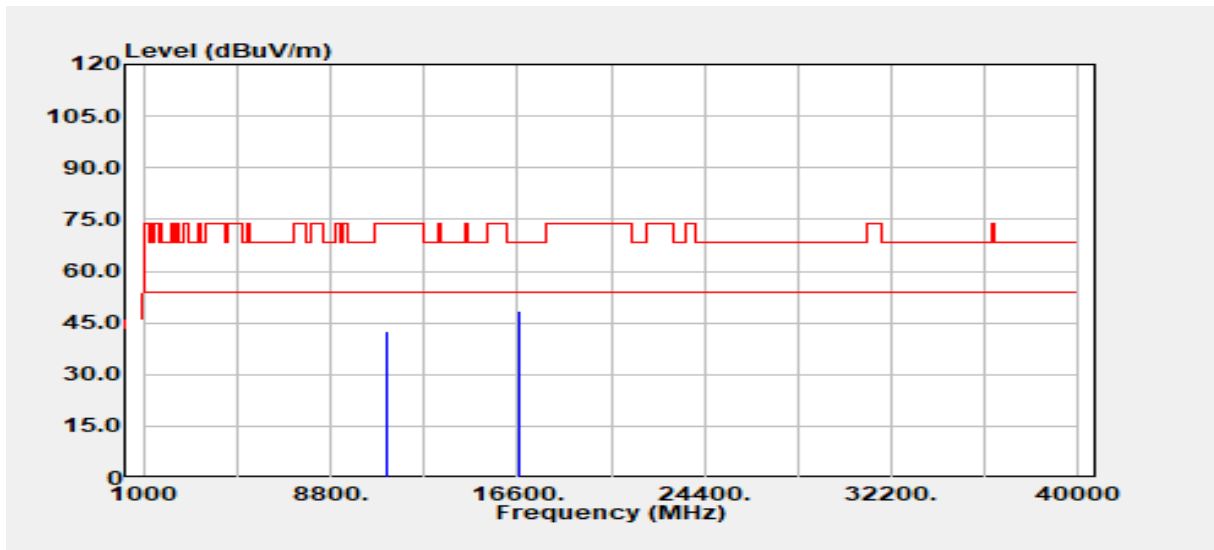


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11140.00	Peak	30.13	12.49	42.62	74.00	-31.38
11140.00	Average	24.86	12.49	37.35	54.00	-16.65
16710.00	Peak	27.84	20.67	48.51	68.20	-19.69
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

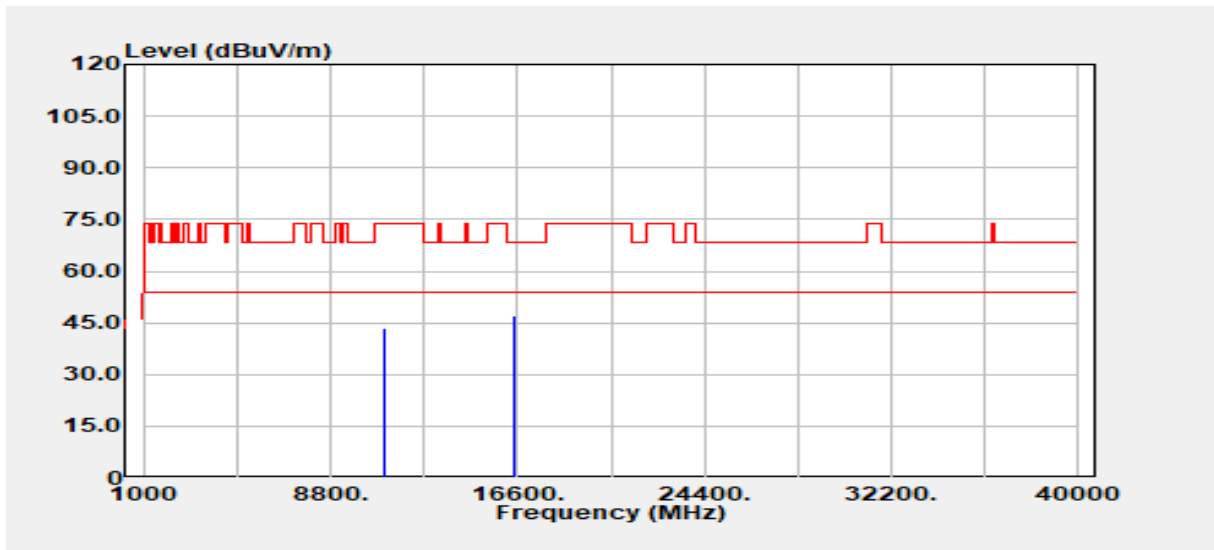


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	30.97	12.42	43.39	74.00	-30.61
11000.00	Average	23.78	12.42	36.20	54.00	-17.80
16500.00	Peak	28.34	18.70	47.04	68.20	-21.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5500 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

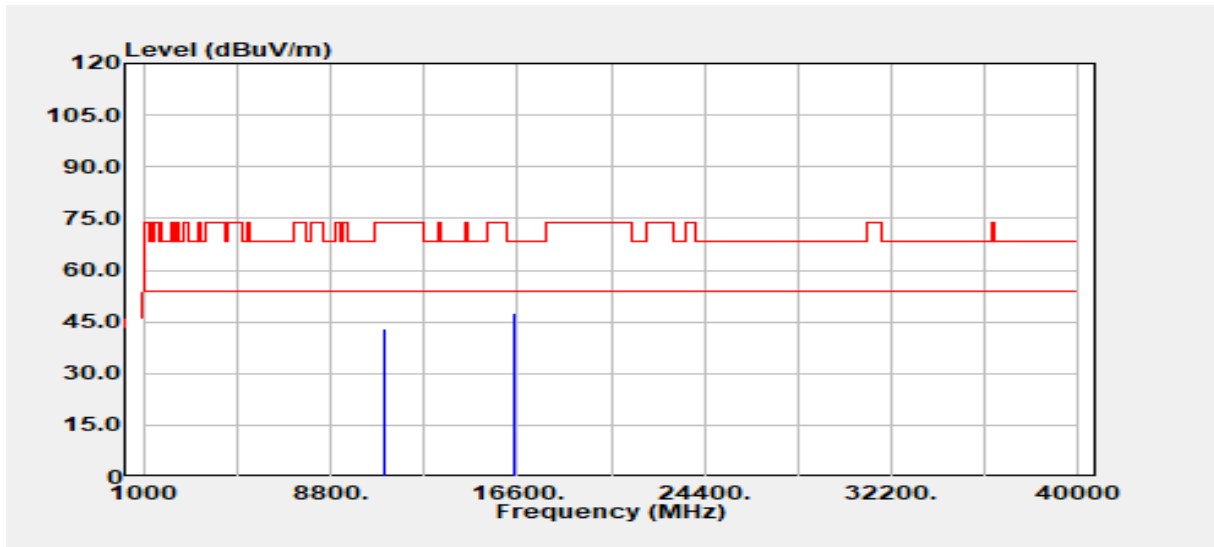


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11000.00	Peak	30.56	12.42	42.98	74.00	-31.02
11000.00	Average	23.93	12.42	36.35	54.00	-17.65
16500.00	Peak	28.78	18.70	47.48	68.20	-20.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

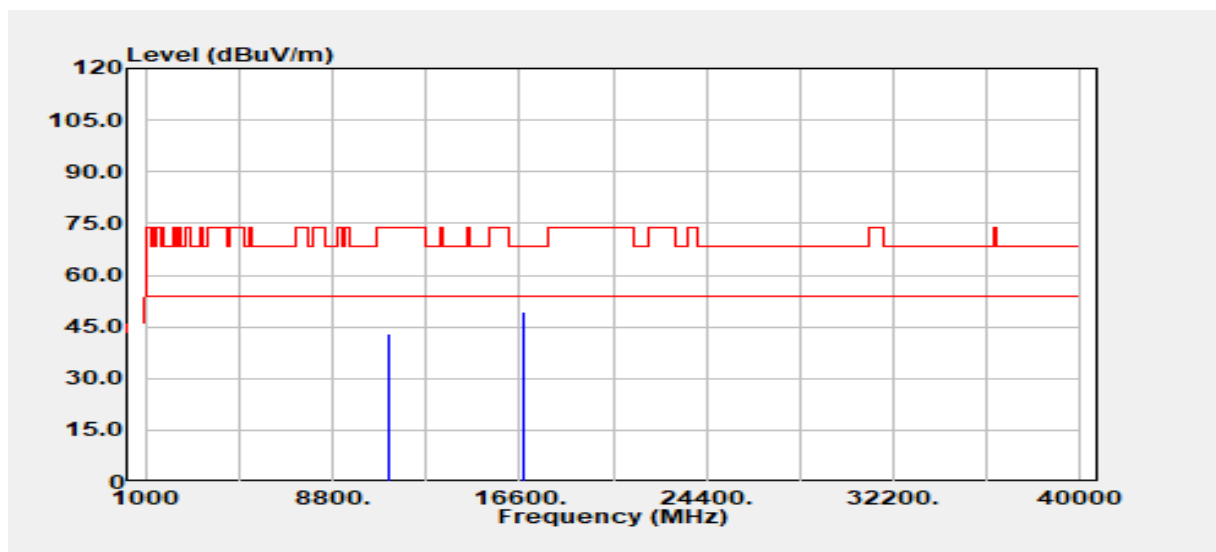


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11160.00	Peak	30.38	12.48	42.86	74.00	-31.14
11160.00	Average	24.12	12.48	36.60	54.00	-17.40
16740.00	Peak	28.67	20.88	49.55	68.20	-18.65
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5580 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

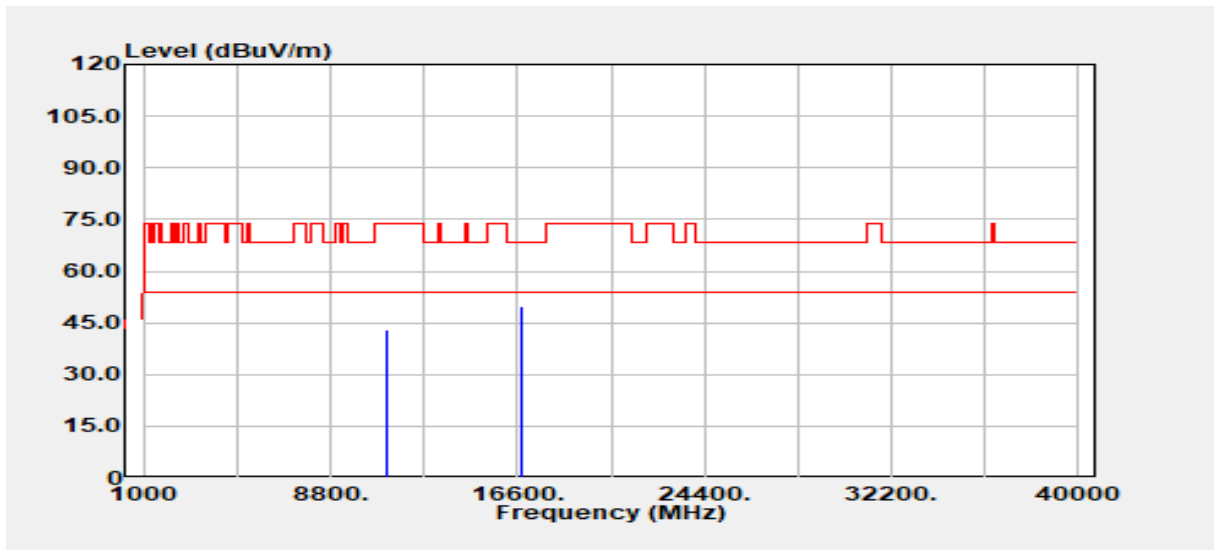


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11160.00	Peak	30.68	12.48	43.16	74.00	-30.84
11160.00	Average	23.89	12.48	36.37	54.00	-17.63
16740.00	Peak	28.74	20.88	49.61	68.20	-18.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak & Average		

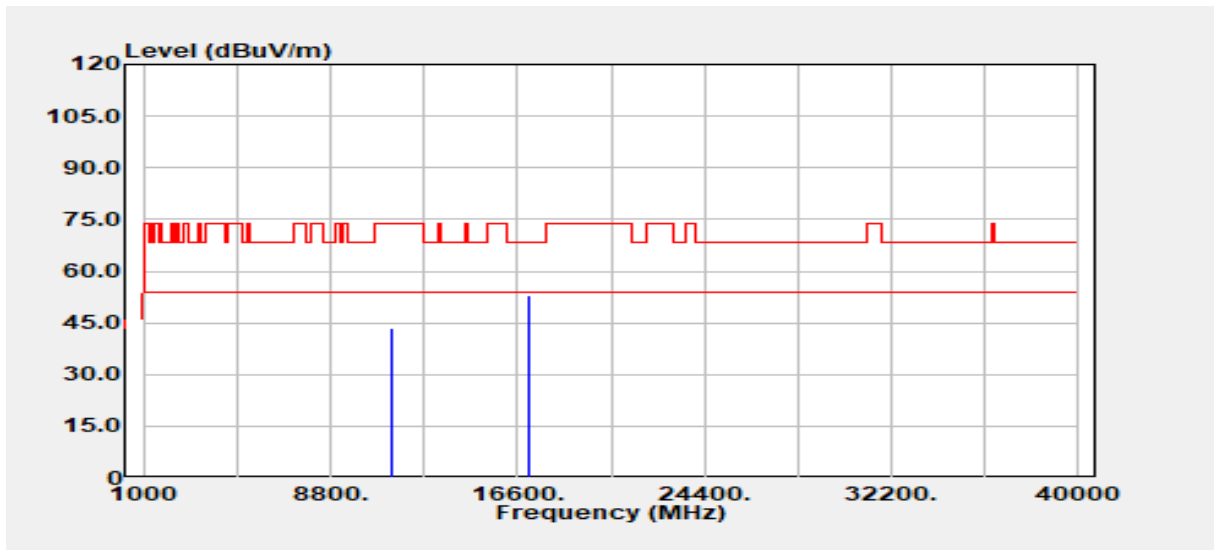


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	31.08	12.39	43.47	74.00	-30.53
11400.00	Average	23.01	12.39	35.40	54.00	-18.60
17100.00	Peak	27.40	25.62	53.02	68.20	-15.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 / 5700 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak & Average		

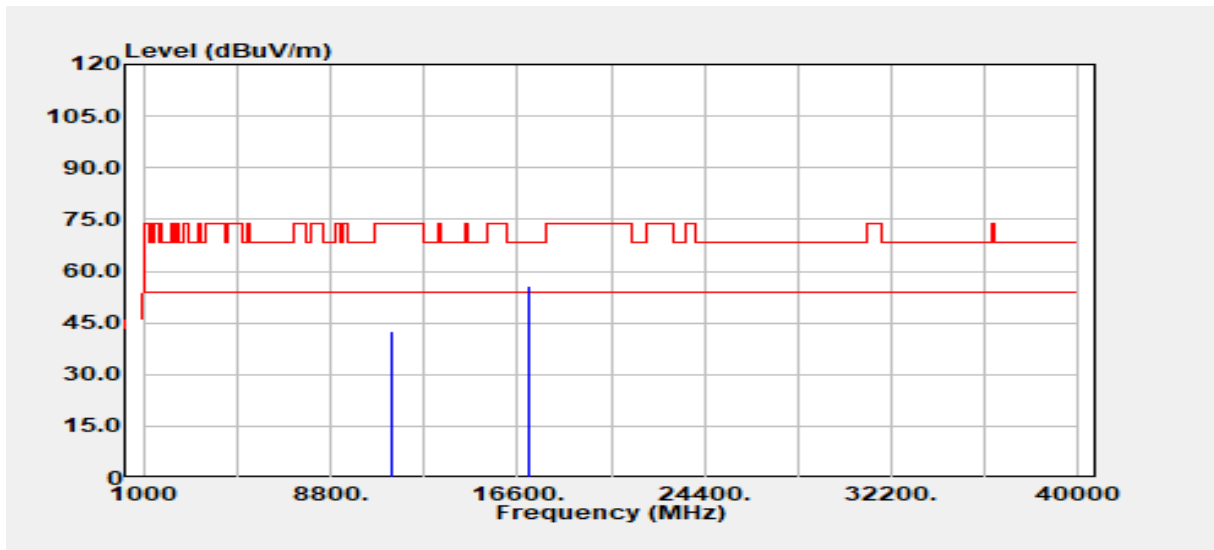


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11400.00	Peak	30.36	12.39	42.75	74.00	-31.25
11400.00	Average	23.41	12.39	35.80	54.00	-18.20
17100.00	Peak	30.21	25.62	55.83	68.20	-12.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

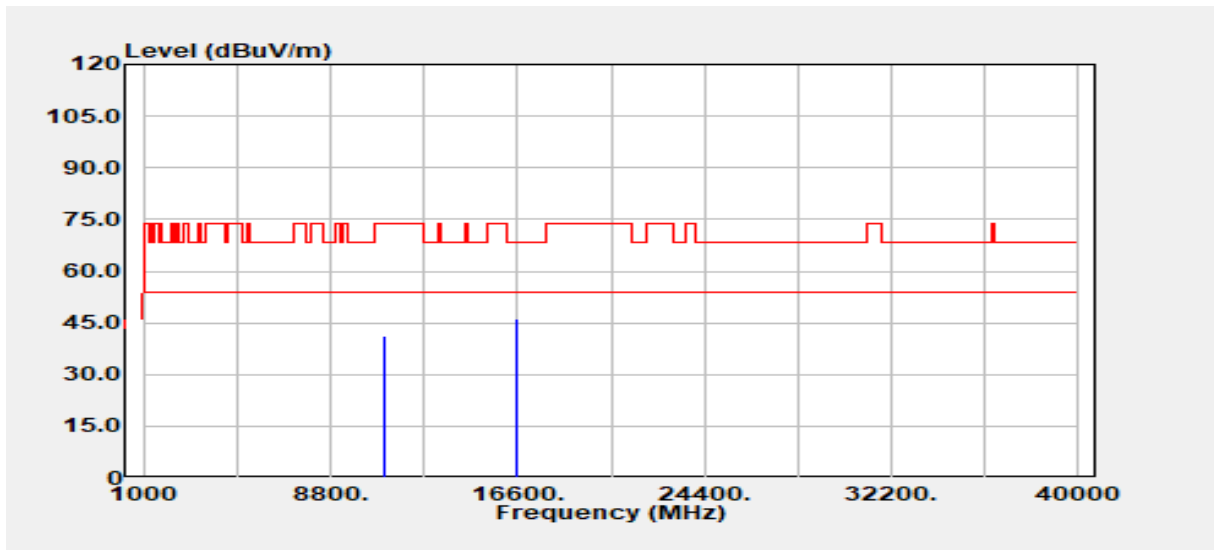


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11020.00	Peak	28.85	12.39	41.24	74.00	-32.76
11020.00	Average	24.02	12.39	36.41	54.00	-17.59
16530.00	Peak	27.65	18.66	46.31	68.20	-21.89
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5510 MHz_	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

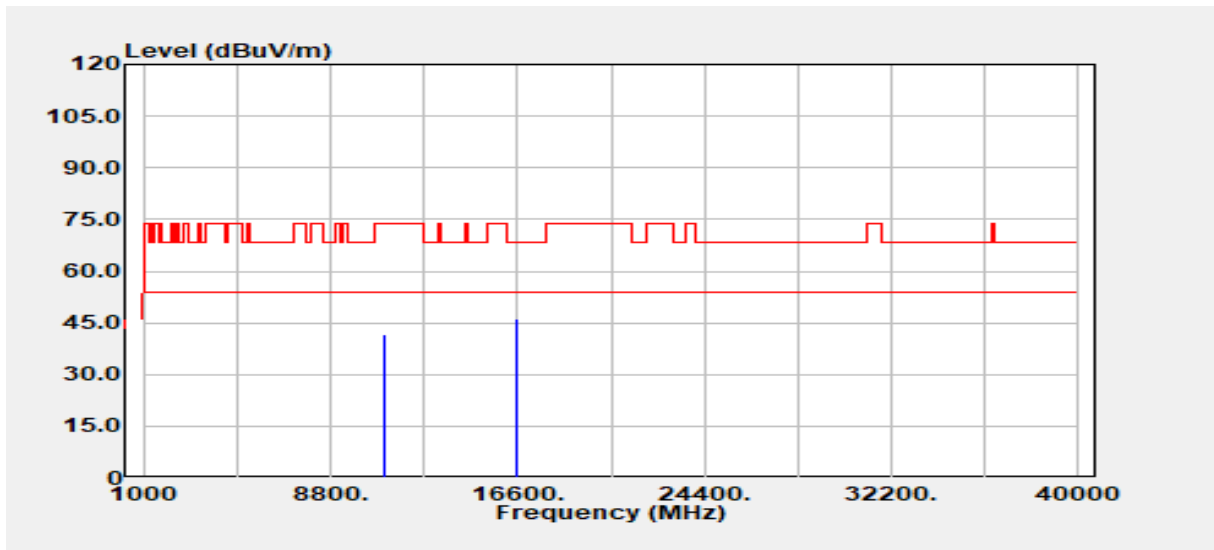


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11020.00	Peak	29.30	12.39	41.69	74.00	-32.31
11020.00	Average	23.73	12.39	36.12	54.00	-17.88
16530.00	Peak	27.68	18.66	46.34	68.20	-21.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

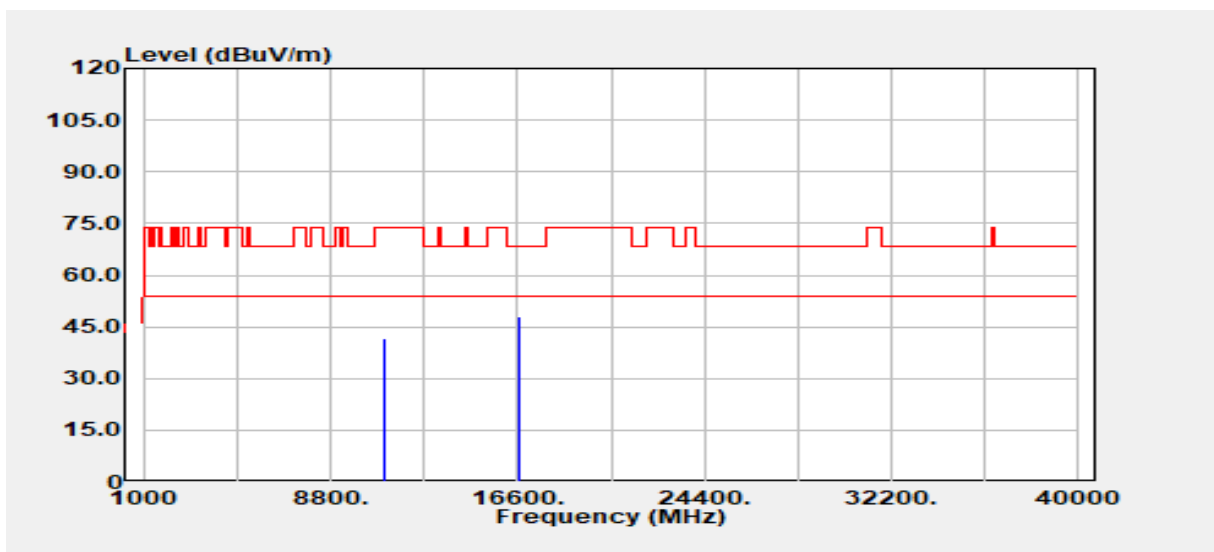


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11100.00	Peak	29.26	12.60	41.86	74.00	-32.14
11100.00	Average	23.81	12.60	36.41	54.00	-17.59
16650.00	Peak	27.87	19.99	47.86	68.20	-20.34
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5550 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

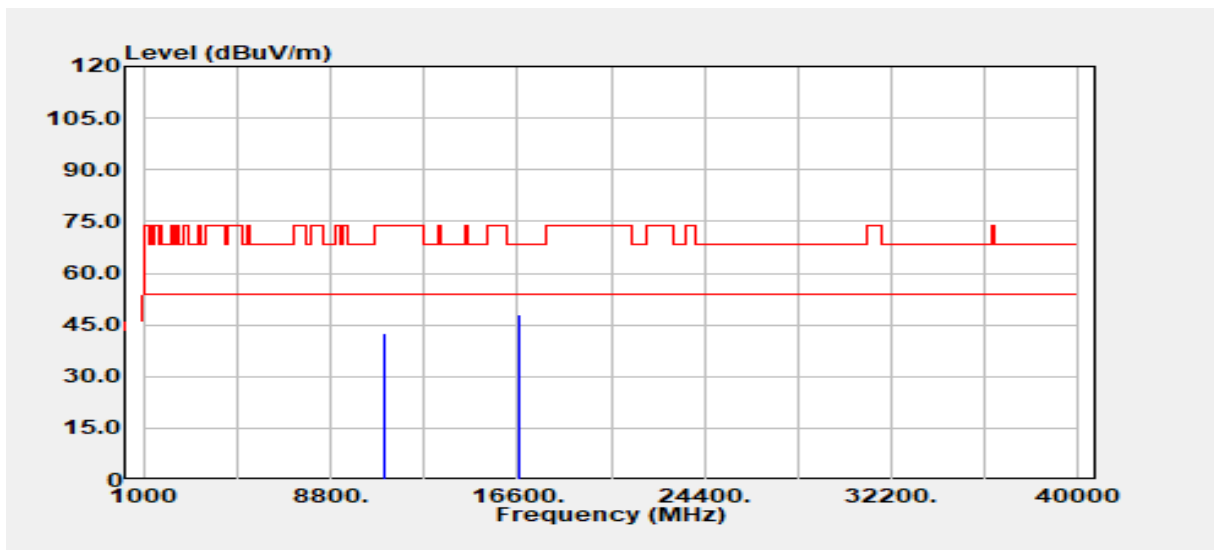


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11100.00	Peak	30.14	12.60	42.74	74.00	-31.26
11100.00	Average	23.75	12.60	36.35	54.00	-17.65
16650.00	Peak	28.14	19.99	48.12	68.20	-20.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5670 MHz_	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

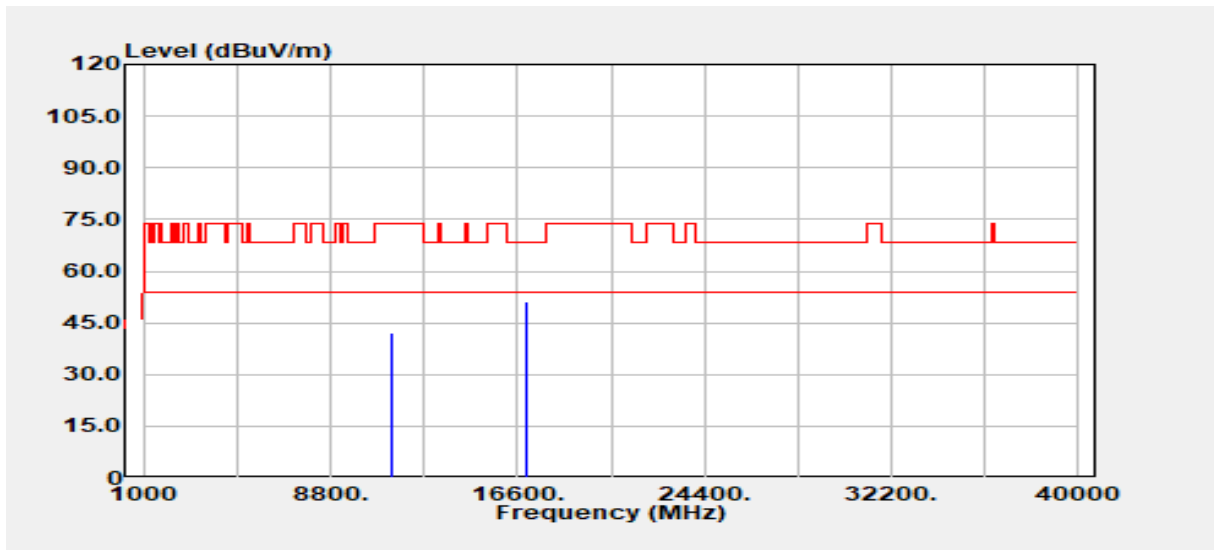


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	29.60	12.55	42.15	74.00	-31.85
11340.00	Average	23.49	12.55	36.04	54.00	-17.96
17010.00	Peak	25.96	25.32	51.28	68.20	-16.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 / 5670 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

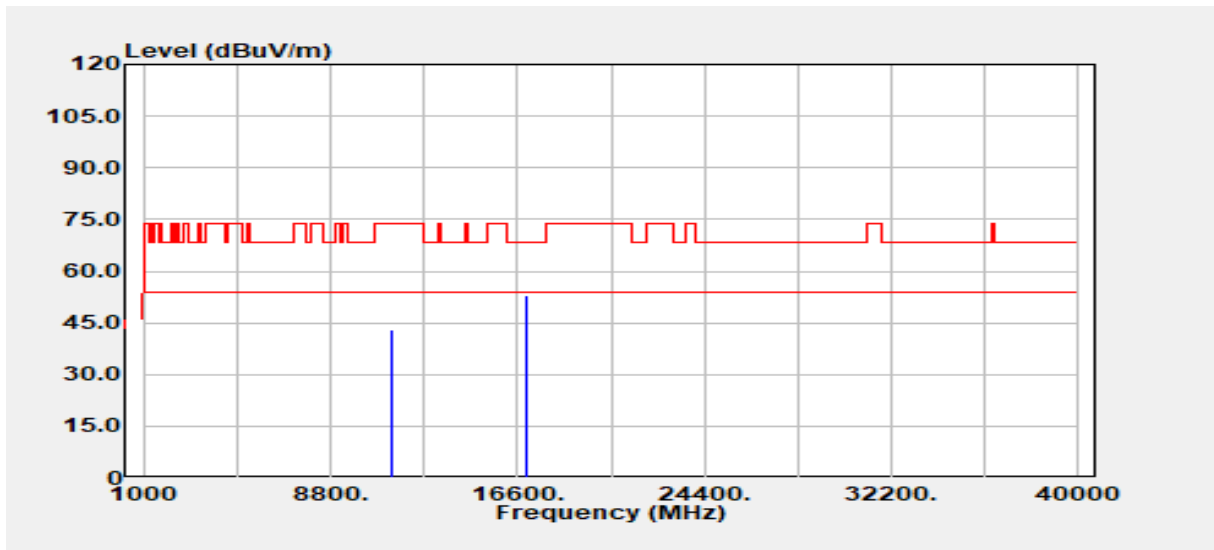


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11340.00	Peak	30.61	12.55	43.16	74.00	-30.84
11340.00	Average	23.49	12.55	36.05	54.00	-17.95
17010.00	Peak	27.63	25.32	52.95	68.20	-15.25
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

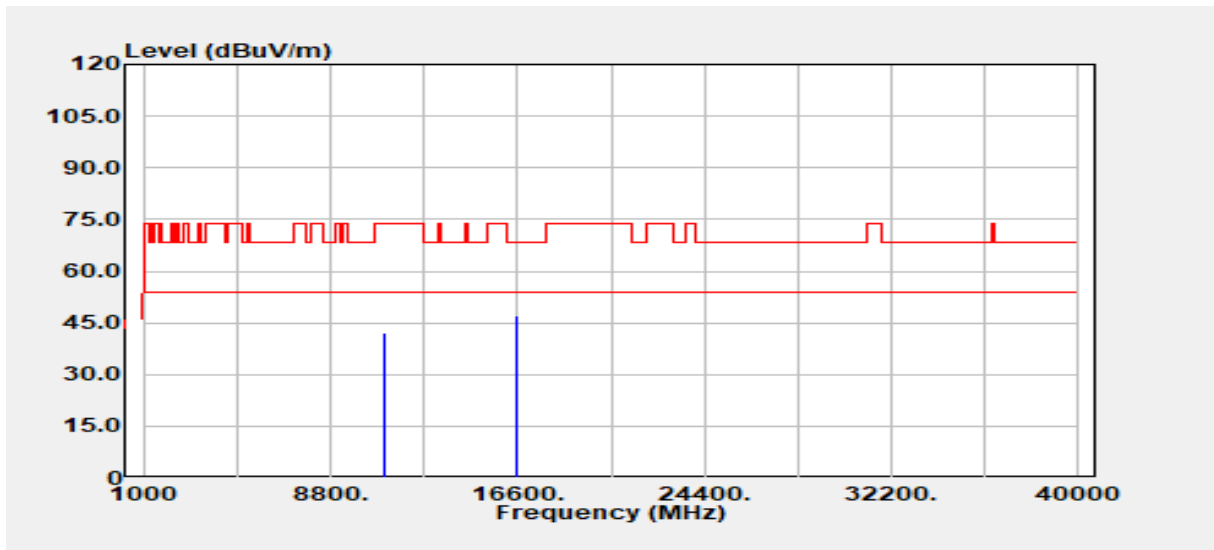


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	29.54	12.40	41.94	74.00	-32.06
11060.00	Average	23.80	12.40	36.20	54.00	-17.80
16590.00	Peak	27.98	19.22	47.21	68.20	-20.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5530 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

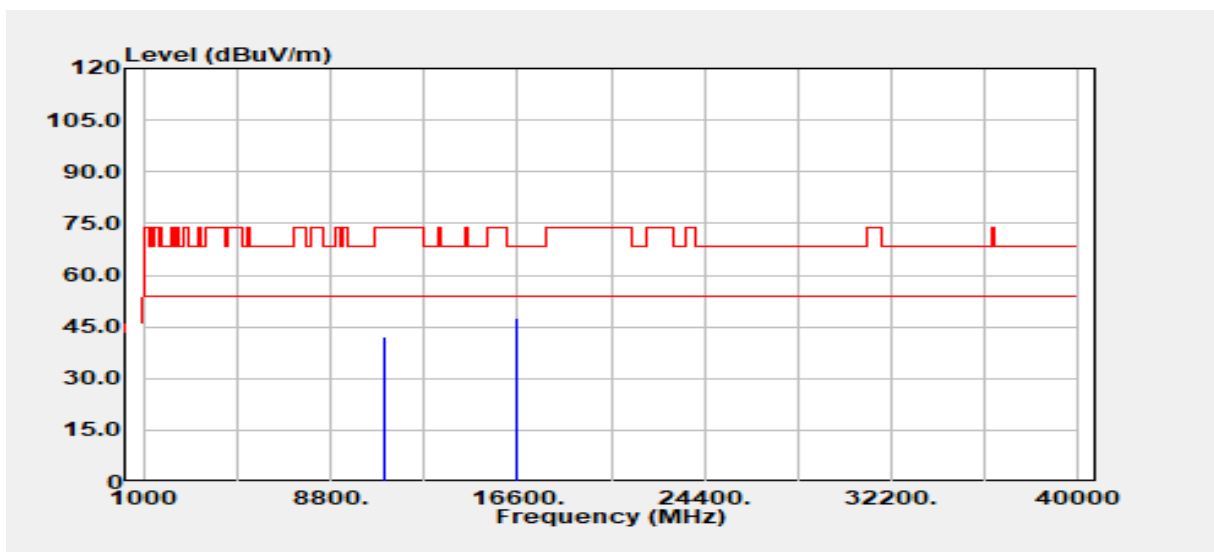


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11060.00	Peak	29.78	12.40	42.17	74.00	-31.83
11060.00	Average	23.65	12.40	36.04	54.00	-17.96
16590.00	Peak	28.14	19.22	47.36	68.20	-20.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

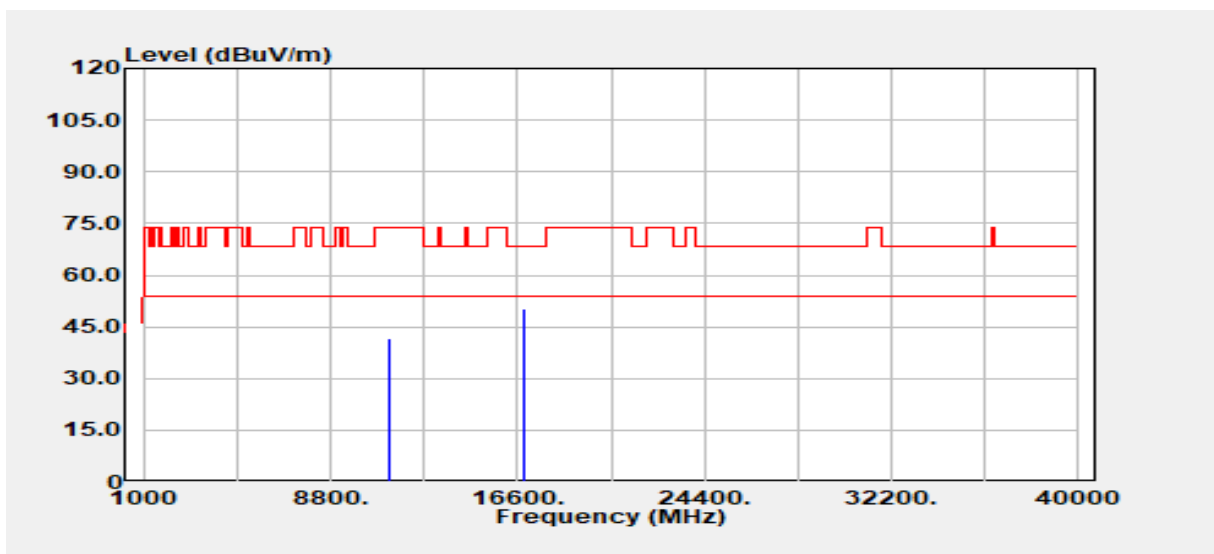


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11220.00	Peak	29.27	12.60	41.87	74.00	-32.13
11220.00	Average	23.87	12.60	36.48	54.00	-17.52
16830.00	Peak	28.40	22.01	50.40	68.20	-17.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE80 / 5610 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

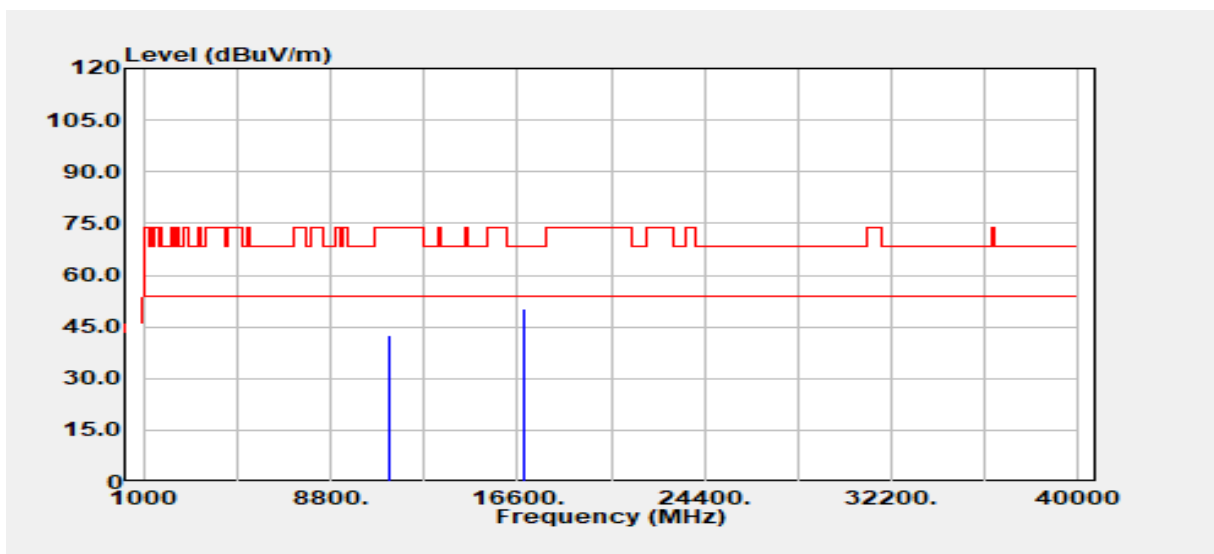


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11220.00	Peak	30.08	12.60	42.68	74.00	-31.32
11220.00	Average	23.56	12.60	36.17	54.00	-17.83
16830.00	Peak	28.33	22.01	50.34	68.20	-17.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

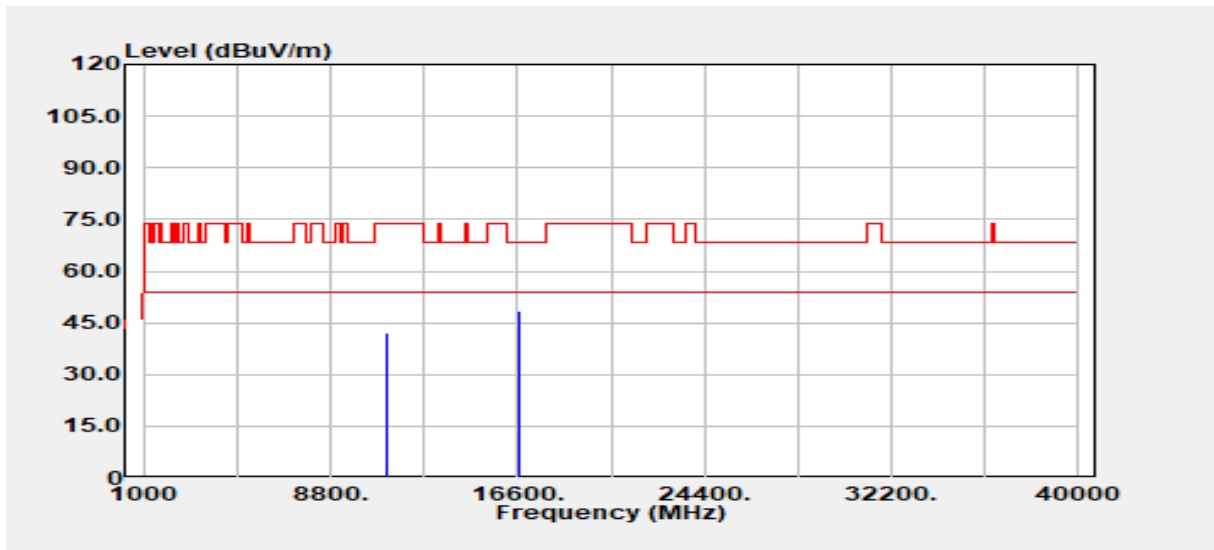


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11140.00	Peak	29.68	12.49	42.16	74.00	-31.84
11140.00	Average	23.71	12.49	36.20	54.00	-17.80
16710.00	Peak	27.62	20.67	48.29	68.20	-19.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE160 / 5570 MHz	Temp/Hum	23.7(°C)/ 60%RH
Test Item	Harmonic	Test Date	May 22, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

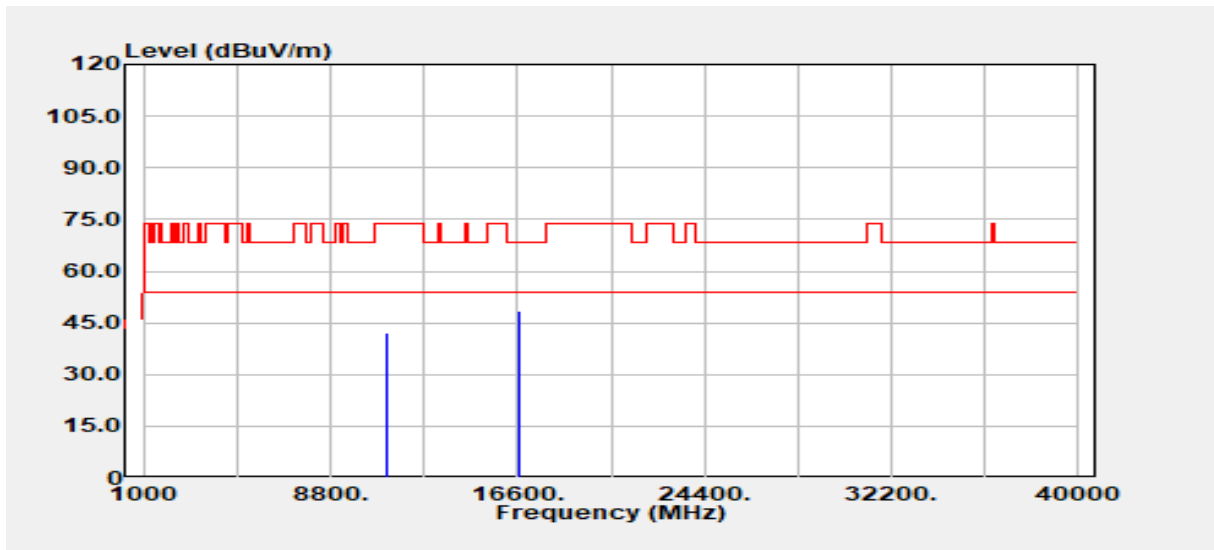


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11140.00	Peak	29.46	12.49	41.95	74.00	-32.05
11140.00	Average	23.93	12.49	36.42	54.00	-17.58
16710.00	Peak	27.62	20.67	48.29	68.20	-19.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Data for UNII-3

Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

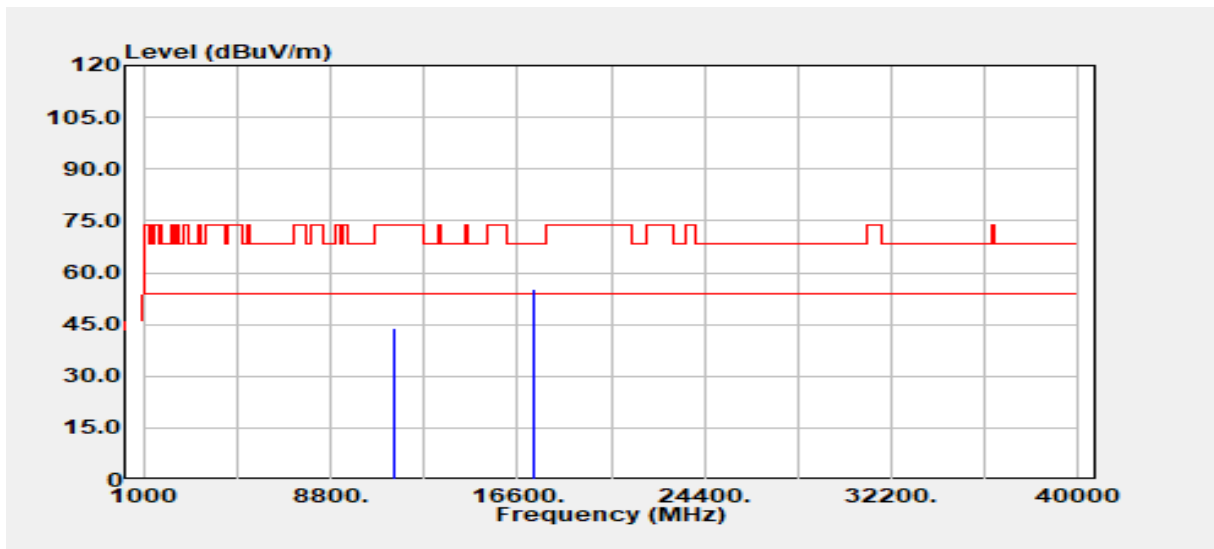


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11490.00	Peak	31.71	12.39	44.10	74.00	-29.90
11490.00	Average	24.62	12.39	37.01	54.00	-16.99
17235.00	Peak	29.08	26.10	55.19	68.20	-13.01
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5745 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

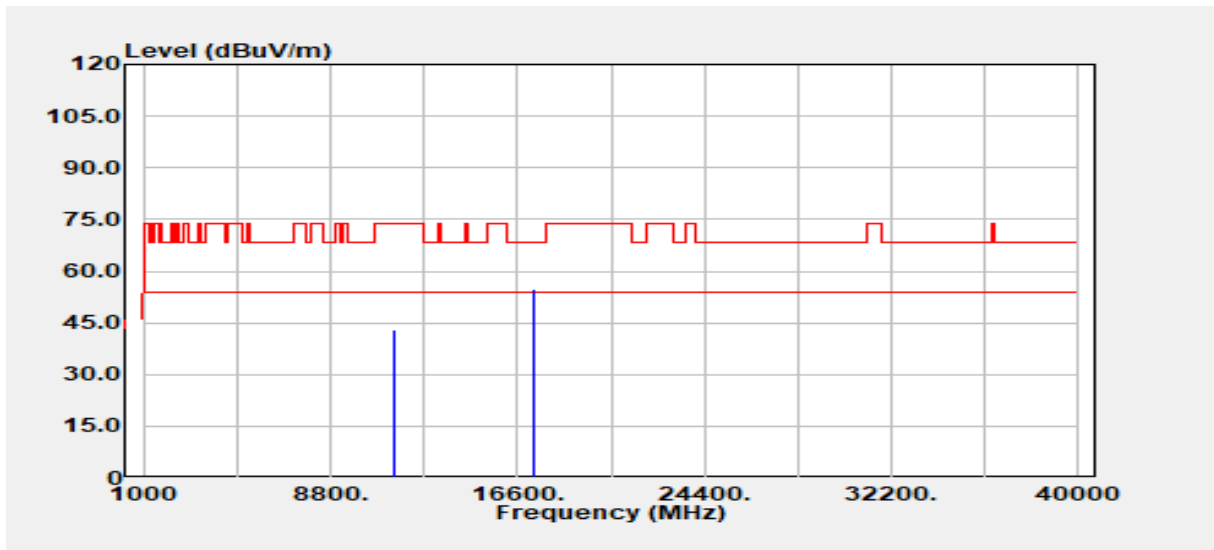


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
11490.00	Peak	30.64	12.39	43.03	74.00	-30.97
11490.00	Average	24.68	12.39	37.07	54.00	-16.93
17235.00	Peak	28.52	26.10	54.62	68.20	-13.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 / 5785 MHz	Temp/Hum	24.8(°C)/ 59%RH
Test Item	Harmonic	Test Date	May 10, 2023
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

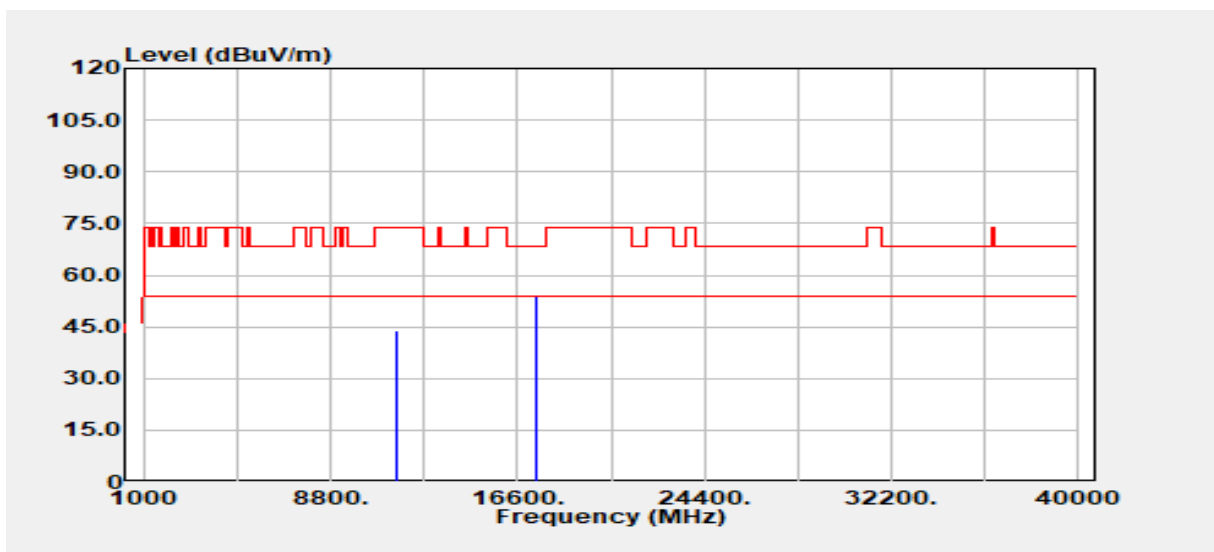

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
11570.00	Peak	31.60	12.49	44.09	74.00	-29.91
11570.00	Average	24.47	12.49	36.96	54.00	-17.04
17355.00	Peak	28.51	25.47	53.98	68.20	-14.22
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.