

Equipment : PowerLine AV 500 Wireless AC600 Extender

Brand Name : D-Link

Model No. : DHP-W312AV

FCC ID : KA2HPW312AVA1

Standard : 47 CFR FCC Part 15.247

Operating Band : 2400 MHz - 2483.5 MHz

FCC Classification: DTS

Applicant : D-Link Corporation

17595 Mt. Herrmann, Fountain Valley, CA 92708 U.S.A.

The product sample received on May 07, 2014 and completely tested on Jun. 05, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

//ames Fan / Assistant Manager





Report No.: FR450701AC

SPORTON INTERNATIONAL INC. Page No. : 1 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	15
3.3	RF Output Power	17
3.4	Power Spectral Density	21
3.5	Emissions in non-restricted frequency bands	24
3.6	Transmitter Radiated Unwanted Emissions	37
4	TEST EQUIPMENT AND CALIBRATION DATA	66
APPE	ENDIX A. TEST PHOTOS	A1-A3

Report No.: FR450701AC



Summary of Test Result

Report No.: FR450701AC

	Conformance Test Specifications								
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result				
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied				
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1805620MHz 56.52 (Margin 7.94dB) – QP 50.03 (Margin 4.43dB) – AV	FCC 15.207	Complied				
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth [MHz] 20M:9.10 / 40M:35.36	≥500kHz	Complied				
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 25.03	Power [dBm]: 30	Complied				
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]: 2.05	PSD [dBm/3kHz]: 8	Complied				
3.5	15.247(d)	Emissions in non-restricted frequency bands	Out-of -band emissions are 20dB below the highest power	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied				
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:2483.50MHz 73.00 (Margin 1.00dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied				

SPORTON INTERNATIONAL INC. : 3 of 67
TEL: 886-3-3273456 : Report Version : Rev. 01



Revision History

Report No.: FR450701AC

Report No.	Version	Description	Issued Date
FR450701AC	Rev. 01	Initial issue of report	Jul. 30, 2014

SPORTON INTERNATIONAL INC. Page No. : 4 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information								
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)			
2400-2483.5	b	2412-2462	1-11 [11]	1	19.73			
2400-2483.5	g	2412-2462	1-11 [11]	1	24.89			
2400-2483.5	HT20	2412-2462	1-11 [11]	1	25.03			
2400-2483.5	HT40	2422-2452	3-9 [7]	1	24.63			

Report No.: FR450701AC

Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Information

		Antenna Category								
	Equ	quipment placed on the market without antennas								
\boxtimes	Inte	gral antenna (antenna permanently attached)								
	\boxtimes	Temporary RF connector provided								
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.								
	Exte	ernal antenna (dedicated antennas)								
		Single power level with corresponding antenna(s).								
		Multiple power level and corresponding antenna(s).								
		RF connector provided								
		☐ Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type)								
		Standard antenna connector. (e.g., SMA, N, BNC, and TNC type)								

	Antenna General Information						
No.	No. Ant. Cat. Ant. Type Connector Gain (dBi)						
1	Integral	PCB	I-PEX	2.41			

SPORTON INTERNATIONAL INC. : 5 of 67
TEL: 886-3-3273456 : Report Version : Rev. 01

1.1.3 Type of EUT

	Identify EUT						
EU	Γ Serial Number	N/A					
Pre	sentation of Equipment	☐ Production ; ☐ Prototype					
		Type of EUT					
\boxtimes	Stand-alone						
	Combined (EUT where the radio part is fully integrated within another device)						
	Combined Equipment - Brand Name / Model No.:						
	Plug-in radio (EUT intended for a variety of host systems)						
	Host System - Brand Name / Model No.:						
	Other:						

Report No.: FR450701AC

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle						
Operated normally mode for worst duty cycle						
○ Operated test mode for worst duty cycle						
Test Signal Duty Cycle (x) Power Duty Factor [dB] – (10 log 1/x)						
	0.01					
	0.40					
□ 90.99% - IEEE 802.11n (HT20)	0.41					
81.50% - IEEE 802.11n (HT40)	0.89					

1.1.5 EUT Operational Condition

Power Supply Type	100-240Vac, 50/60Hz, 0.15A

SPORTON INTERNATIONAL INC. : 6 of 67
TEL: 886-3-3273456 : Report Version : Rev. 01

1.2 Support Equipment

	Support Equipment						
No.	No. Equipment Brand Name Model Name FCC ID						
1	Notebook	DELL	E6430	DoC			

Report No.: FR450701AC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074 v03r02
- FCC KDB 662911 v02r01
- FCC KDB 412172 v01

1.4 Testing Location Information

Testing Location								
\boxtimes	HWA YA ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.							
		TEL	:	886-3-327-3450	6 FAX : 886	6-3-327-0973		
Te	Test Condition Test Site No. Test Engineer Test Environment Test Date							
R	RF Conducte	d		TH01-HY	Mark Liao	22℃ / 61%	Jun. 02, 2014	
AC Conduction				CO04-HY	Skys Huang	22°C / 64%	Jun. 05, 2014	
Rad	Radiated Emission 03CH03-HY Jack Li 23°C / 64% May 28, 2014						May 28, 2014	
Test site registered number [643075] with FCC Test site registered number [4086B-1] with IC								

SPORTON INTERNATIONAL INC. Page No. : 7 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FR450701AC

Measurement Uncertainty						
Test Item		Uncertainty	Limit			
AC power-line conducted emissions		±2.26 dB	N/A			
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A			
RF output power, conducted		±0.63 dB	N/A			
Power density, conducted		±0.81 dB	N/A			
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A			
	1 – 18 GHz	±0.67 dB	N/A			
	18 – 40 GHz	±0.83 dB	N/A			
	40 – 200 GHz	N/A	N/A			
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A			
	1 – 18 GHz	±3.59 dB	N/A			
	18 – 40 GHz	±3.82 dB	N/A			
	40 – 200 GHz	N/A	N/A			
Temperature	·	±0.8 °C	N/A			
Humidity	±3 %	N/A				
DC and low frequency voltages	±3 %	N/A				
Time	±1.42 %	N/A				
Duty Cycle		±1.42 %	N/A			

SPORTON INTERNATIONAL INC. Page No. : 8 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

	Worst Modulation Used for Conformance Testing									
Modulation Mode	Modulation Mode									
11b	1	1-11 Mbps	1 Mbps							
11g	1	6-54 Mbps	6 Mbps							
HT20	1	MCS 0-7	MCS 0							
HT40	1	MCS 0-7	MCS 0							

Report No.: FR450701AC

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration							
IEEE Std. 802.11	Test Channel Frequencies (MHz)						
b, g, n (HT-20)	2412-(F1), 2437-(F2), 2462-(F3)						
n (HT-40)	2422-(F4), 2437-(F5), 2452-(F6)						

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)										
Test Software	RTL8	RTL819x								
Test Software Version	2.3									
		Test Frequency (MHz)								
Modulation Mode	N _{TX}		NCB: 20MHz			NCB: 40MHz				
		2412	2437	2462	2422	2437	2452			
11b,1-11Mbps	1	45	44	41						
11g,6-54Mbps	1	53	52	51						
HT20,M0-7	1	53	52	50						
HT40,M0-7	1				53	53	52			

SPORTON INTERNATIONAL INC. : 9 of 67
TEL: 886-3-3273456 : Report Version : Rev. 01



2.4 The Worst Case Measurement Configuration

Tř	The Worst Case Mode for Following Conformance Tests						
Tests Item	AC power-line conducted emissions						
Condition AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz							
Operating Mode	Operating Mode Description						
1	AC Power & Radio link (WLAN)						

Report No.: FR450701AC


TI	The Worst Case Mode for Following Conformance Tests						
Tests Item	RF Output Power,6dB bandwidth, Power Spectral Density						
Test Condition Conducted measurement at transmit chains							
Modulation Mode 11b,11g, HT20, HT40							
Operating Mode	Operating Mode Description						
1	AC Power & Radio link (WLAN)						

Th	The Worst Case Mode for Following Conformance Tests								
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions								
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.								
	EUT will be placed in fixed position.								
User Position	EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Z.								
	EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.								
Operating Mode		o link (WLAN)							
Modulation Mode	11b, 11g, HT20, HT40								
	X Plane	Y Plane	Z Plane						
Orthogonal Planes of EUT									

SPORTON INTERNATIONAL INC. Page No. : 10 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



Test Setup Diagram 2.5

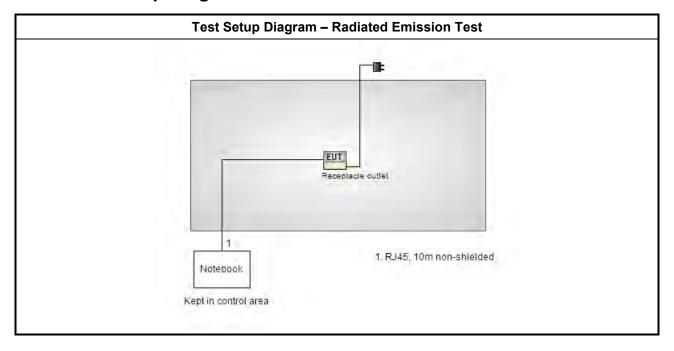

SPORTON INTERNATIONAL INC. Page No. : 11 of 67 TEL: 886-3-3273456 Report Version : Rev. 01



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit								
Frequency Emission (MHz)	Quasi-Peak	Average						
0.15-0.5	66 – 56 *	56 – 46 *						
0.5-5	56	46						
5-30	60	50						

Report No.: FR450701AC


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

	Test Method
\boxtimes	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

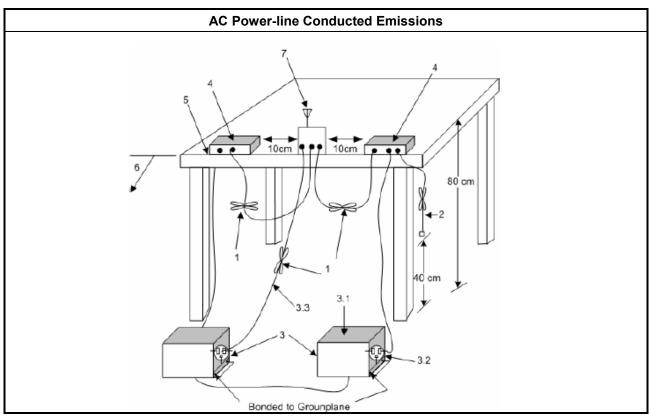

SPORTON INTERNATIONAL INC. Page No. : 12 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.1.5 Test Result of AC Power-line Conducted Emissions

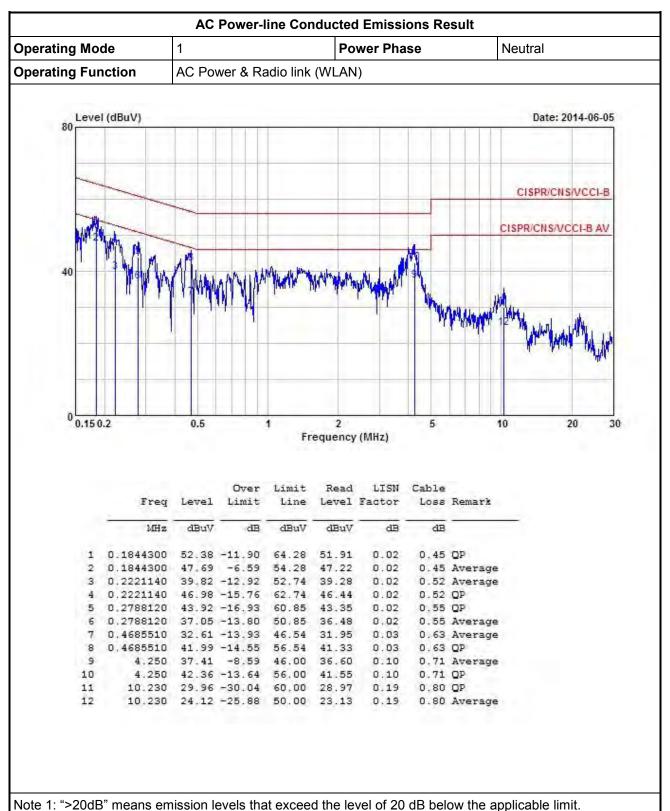

SPORTON INTERNATIONAL INC.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

TEL: 886-3-3273456 FAX: 886-3-3270973 Page No. : 13 of 67
Report Version : Rev. 01


Report No.: FR450701AC

AC Power-line Conducted Emissions Result

Operating Mode 1 Power Phase Line

Operating Function AC Power & Radio link (WLAN)

Report No.: FR450701AC

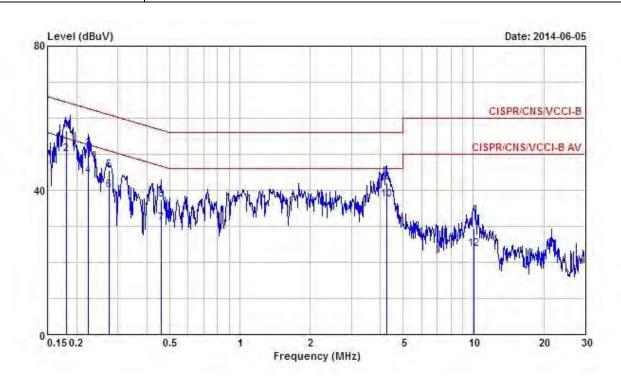

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	_
1	0.1805620	56.52	-7.94	64.46	56.05	0.03	0.44	QP
2	0.1805620	50.03	-4.43	54.46	49.56	0.03	0.44	Average
3	0.2231870	51.20	-11.50	62.70	50.65	0.03	0.52	QP
4	0.2231870	43.97	-8.73	52.70	43.42	0.03	0.52	Average
5	0.2753630	45.40	-15.55	60.95	44.82	0.03	0.55	QP
6	0.2753630	40.03	-10.92	50.95	39.45	0.03	0.55	Average
7	0.4587840	30.68	-16.03	46.71	30.02	0.03	0.63	Average
8	0.4587840	37.47	-19.24	56.71	36.81	0.03	0.63	QP
9	4.250	42.08	-13.92	56.00	41.26	0.11	0.71	QP
10	4.250	37.49	-8.51	46.00	36.67	0.11	0.71	Average
11	10.020	29.59	-30.41	60.00	28.60	0.19	0.80	QP
12	10.020	23.64	-26.36	50.00	22.65	0.19	0.80	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 14 of 67 TEL: 886-3-3273456 Report Version : Rev. 01

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit						
Systems using digital modulation techniques:						
☑ 6 dB bandwidth ≥ 500 kHz.						

Report No.: FR450701AC


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

			Test Method								
\boxtimes	For	r the emission bandwidth shall be measured using one of the options below:									
	\boxtimes	Refe	er as FCC KDB 558074 v03r02, clause 8.1 Option 1 for 6 dB bandwidth measurement.								
		Refe	er as FCC KDB 558074 v03r02, clause 8.2 Option 2 for 6 dB bandwidth measurement.								
		Refe	er as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.								
\boxtimes	For	cond	ucted measurement.								
	\boxtimes	The	EUT supports single transmit chain and measurements performed on this transmit chain.								
		The	EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.								
		The	EUT supports multiple transmit chains using options given below:								
			Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.								
			Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.								

3.2.4 Test Setup

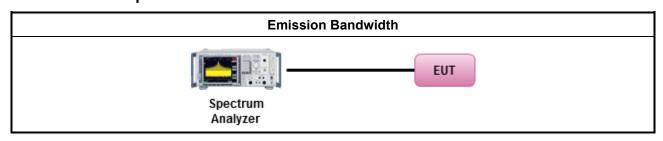


SPORTON INTERNATIONAL INC. Page No. : 15 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.2.5 Test Result of Emission Bandwidth

			En	nission B	andwidth	n Result					
Cond	ition			Emission Bandwidth (MHz)							
Maralada a		Eroa		99% Bandwidth				6dB Ba	ndwidth		
Modulation Mode	N _{TX}	Freq. (MHz)	Chain- Port 1	Chain- Port 2	Chain- Port 3	Chain- Port 4	Chain- Port 1	Chain- Port 2	Chain- Port 3	Chain- Port 4	
11b	1	2412	15.27				9.10				
11b	1	2437	15.30				9.57				
11b	1	2462	15.30				9.10				
11g	1	2412	16.97				16.35				
11g	1	2437	16.97				16.35				
11g	1	2462	16.97				16.35				
HT-20	1	2412	18.09				17.57				
HT-20	1	2437	18.16				17.57				
HT-20	1	2462	18.09				17.57				
HT-40	1	2412	36.14				35.36				
HT-40	1	2437	36.14				35.36				
HT-40	1	2462	36.08				35.36				
Lin	nit			N/A ≥500 kHz							
Res	ult			Complied							
lote 1: N _{TX} = Nu	mber c	of Transm	it Chains								

Report No.: FR450701AC

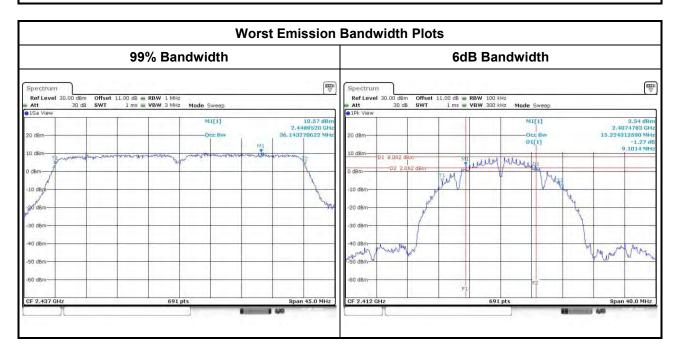

SPORTON INTERNATIONAL INC. Page No. : 16 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

3.3 RF Output Power

3.3.1 RF Output Power Limit

		RF Output Power Limit
Max	cimu	m Peak Conducted Output Power or Maximum Conducted Output Power Limit
\boxtimes	240	0-2483.5 MHz Band:
	\boxtimes	If $G_{TX} \le 6$ dBi, then $P_{Out} \le 30$ dBm (1 W)
	\boxtimes	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
		Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
		Smart antenna system (SAS):
		☐ Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
		Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
		\square Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r	.p. P	ower Limit:
\boxtimes	240	0-2483.5 MHz Band
	\boxtimes	Point-to-multipoint systems (P2M): $P_{eirp} \le 36 \text{ dBm } (4 \text{ W})$
		Point-to-point systems (P2P): $P_{eirp} \le MAX(36, [P_{Out} + G_{TX}]) dBm$
		Smart antenna system (SAS)
		☐ Single beam: $P_{eirp} \le MAX(36, P_{Out} + G_{TX}) dBm$
		☐ Overlap beam: $P_{eirp} \le MAX(36, P_{Out} + G_{TX}) dBm$
		☐ Aggregate power on all beams: $P_{eirp} \le MAX(36, [P_{Out} + G_{TX} + 8]) dBm$
\mathbf{G}_{TX}	= the	aximum peak conducted output power or maximum conducted output power in dBm, e maximum transmitting antenna directional gain in dBi. i.r.p. Power in dBm.

Report No.: FR450701AC

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


SPORTON INTERNATIONAL INC. Page No. : 17 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

3.3.3 Test Procedures

		Test Method
\boxtimes	Max	rimum Peak Conducted Output Power
		Refer as FCC KDB 558074 v03r02, clause 9.1.1 (RBW ≥ DTS BW).
	\boxtimes	Refer as FCC KDB 558074 v03r02, clause 9.1.2 (Peak power meter)
\boxtimes	Max	rimum Conducted Output Power (Reference only)
		Refer as FCC KDB 558074 v03r02, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
		Refer as FCC KDB 558074 v03r02, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
		Refer as FCC KDB 558074 v03r02, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
		Refer as FCC KDB 558074 v03r02, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF _l	power meter and average over on/off periods with duty factor or gated trigger
	\boxtimes	Refer as FCC KDB 558074 v03r02, clause 9.2.3.2 Method AVGPM-G (using a gated RF average power meter)
\boxtimes	For	conducted measurement.
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
		The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
		If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) EIRP _{total} = $P_{total} + DG$

Report No.: FR450701AC

3.3.4 Test Setup

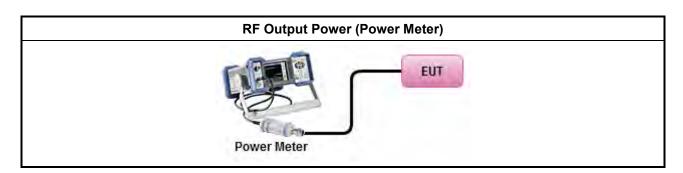

SPORTON INTERNATIONAL INC. Page No. : 18 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.3.5 Directional Gain for Power Measurement

	Dire	ctional Gain (D	G) Result				
Transmit Chains No	Transmit Chains No.			-	-		
Maximum G _{ANT} (dBi)	Maximum G _{ANT} (dBi)		m G _{ANT} (dBi)		-	-	-
Modulation Mode	DG (dBi)	N _{TX}	N _{ss}	STBC	Array Gain (dB)		
11b,1-11Mbps	2.41	1	1	-	-		
11g,6-54Mbps	2.41	1	1	-	-		
HT-20,M0-7	2.41	1	1	-	-		
HT-40,M0-7	2.41	1	1	-	-		

Report No.: FR450701AC

SPORTON INTERNATIONAL INC. Page No. : 19 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.3.6 Test Result of Maximum Conducted Output Power

		Ma	aximum	Peak Co	onducte	d Outpu	ıt Powe	r			
Condi		RF Output Power (dBm)									
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	1	2412	19.52				19.52	30.00	2.41	21.93	36.00
11b	1	2437	19.73				19.73	30.00	2.41	22.14	36.00
11b	1	2462	19.65				19.65	30.00	2.41	22.06	36.00
11g	1	2412	24.89				24.89	30.00	2.41	27.30	36.00
11g	1	2437	24.86				24.86	30.00	2.41	27.27	36.00
11g	1	2462	23.28				23.28	30.00	2.41	25.69	36.00
HT-20	1	2412	25.03				25.03	30.00	2.41	27.44	36.00
HT-20	1	2437	25.01				25.01	30.00	2.41	27.42	36.00
HT-20	1	2462	24.23				24.23	30.00	2.41	26.64	36.00
HT-40	1	2422	24.48				24.48	30.00	2.41	26.89	36.00
HT-40	1	2437	24.63				24.63	30.00	2.41	27.04	36.00
HT-40	1	2452	23.68				23.68	30.00	2.41	26.09	36.00
Resi	ult			Complied							

	Maximum Conducted (Average) Output Power										
Condi		RF Output Power (dBm)									
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	1	2412	17.13				17.13	30.00	2.41	19.54	36.00
11b	1	2437	17.26				17.26	30.00	2.41	19.67	36.00
11b	1	2462	17.18				17.18	30.00	2.41	19.59	36.00
11g	1	2412	16.18				16.18	30.00	2.41	18.59	36.00
11g	1	2437	16.23				16.23	30.00	2.41	18.64	36.00
11g	1	2462	16.22				16.22	30.00	2.41	18.63	36.00
HT-20	1	2412	16.02				16.02	30.00	2.41	18.43	36.00
HT-20	1	2437	16.19				16.19	30.00	2.41	18.60	36.00
HT-20	1	2462	15.30				15.30	30.00	2.41	17.71	36.00
HT-40	1	2422	16.01				16.01	30.00	2.41	18.42	36.00
HT-40	1	2437	16.19				16.19	30.00	2.41	18.60	36.00
HT-40	1	2452	16.05				16.05	30.00	2.41	18.46	36.00
Resu	Result			Complied							

Note: AV power is for reference only.

SPORTON INTERNATIONAL INC.

TEL: 886-3-3273456 FAX: 886-3-3270973 Page No. : 20 of 67

Report No.: FR450701AC

Report Version : Rev. 01

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

	Power Spectral Density Limit
\boxtimes	Power Spectral Density (PSD) ≤ 8 dBm/3kHz

Report No.: FR450701AC

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.4.3 Test Procedures

		Test Method					
\boxtimes	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).						
	\boxtimes	Refer as FCC KDB 558074 v03r02, clause 10.2 Method PKPSD (RBW=3kHz; detector=peak)					
		Refer as FCC KDB 558074 v03r02, clause 10.3 Method AVGPSD-1 (spectral trace averaging).					
		Refer as FCC KDB 558074 v03r02, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)					
		Refer as FCC KDB 558074 v03r02, clause 10.5 Method AVGPSD-2 (spectral trace averaging).					
		Refer as FCC KDB 558074 v03r02, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)					
\boxtimes	For conducted measurement.						
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.					
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.					
		The EUT supports multiple transmit chains using options given below:					
		Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.					
		Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.					

SPORTON INTERNATIONAL INC. Page No. : 21 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.4.4 Test Setup

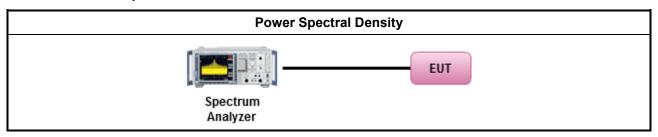

Report No.: FR450701AC


SPORTON INTERNATIONAL INC. Page No. : 22 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.4.5 Test Result of Power Spectral Density

		Р	ower Spectral Density Result				
Cond	lition		Power Spectral Density (dBm/3kHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	Power Limit			
11b	1	2412	0.48	8			
11b	1	2437	2.05	8			
11b	1	2462	1.92	8			
11g	1	2412	-10.49	8			
11g	1	2437	-10.09	8			
11g	1	2462	-9.35	8			
HT-20	1	2412	-11.58	8			
HT-20	1	2437	-11.01	8			
HT-20	1	2462	-11.12	8			
HT-40	1	2422	-13.06	8			
HT-40	1	2437	-12.42	8			
HT-40	1	2452	-12.23	8			
Res	sult		Com	nplied			

Report No.: FR450701AC

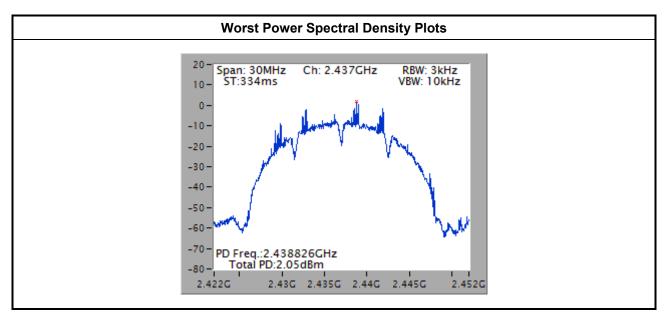

SPORTON INTERNATIONAL INC. Page No. : 23 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.5 Emissions in non-restricted frequency bands

3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

Report No.: FR450701AC

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.5.4 Test Setup

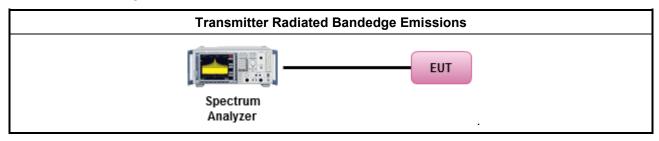


SPORTON INTERNATIONAL INC. Page No. : 24 of 67
TEL: 886-3-3273456 Report Version : Rev. 01




Test Result of Emissions in non-restricted frequency bands 3.5.5

802.11b

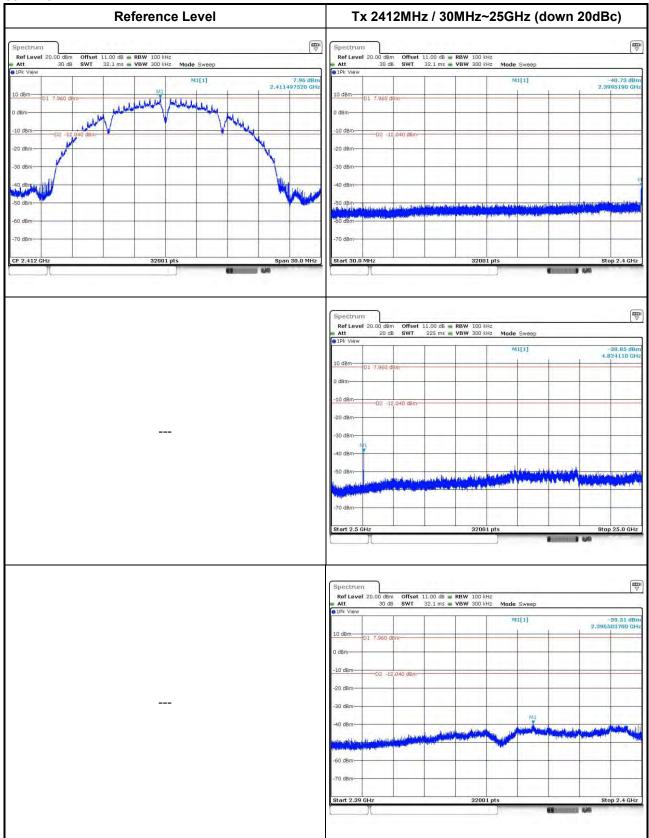


SPORTON INTERNATIONAL INC.

TEL: 886-3-3273456 FAX: 886-3-3270973 Page No. : 25 of 67 Report Version : Rev. 01

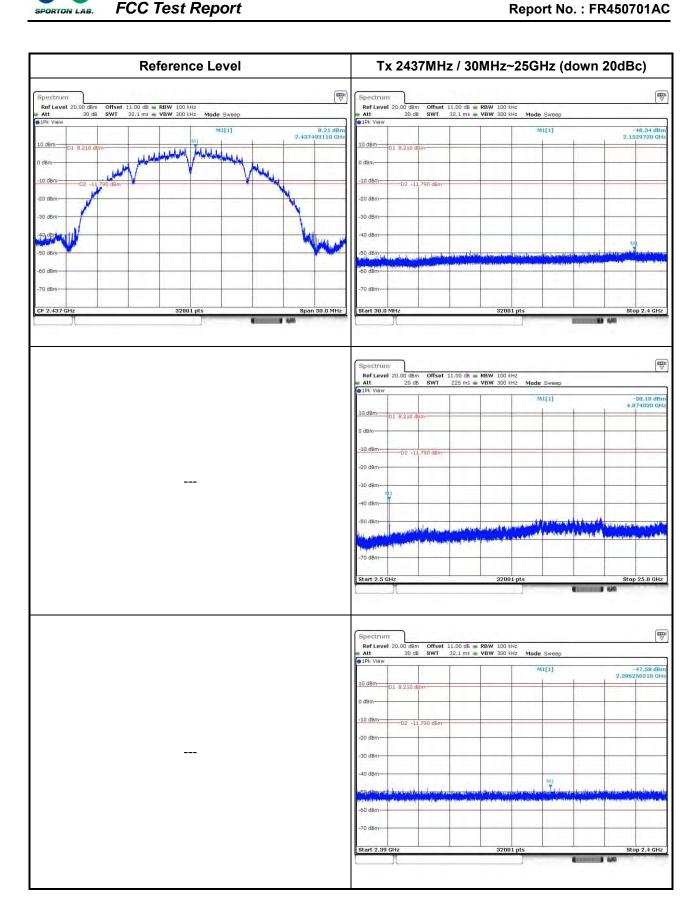


SPORTON INTERNATIONAL INC. Page No. : 26 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

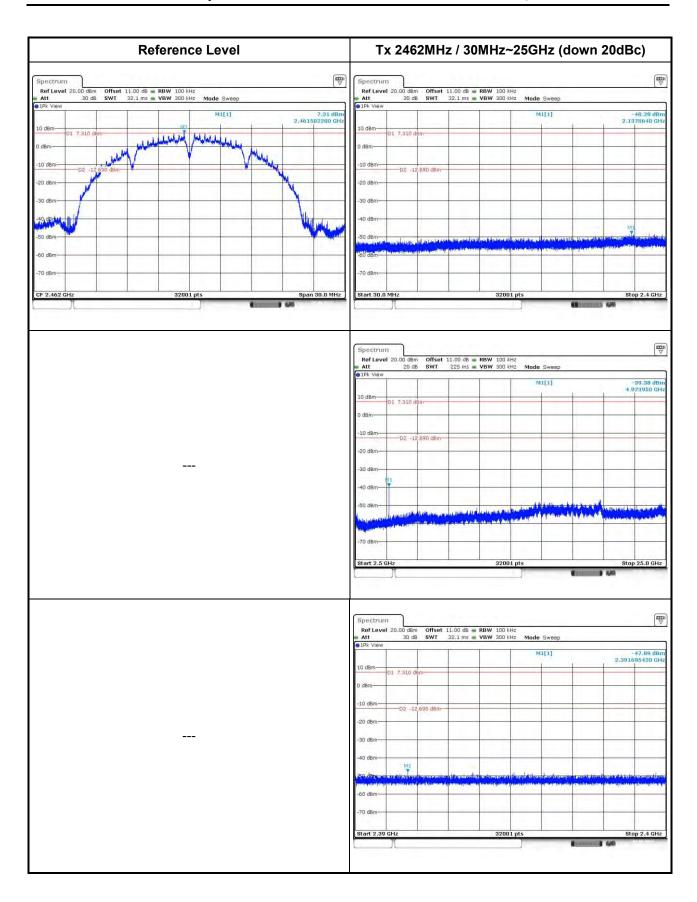


SPORTON INTERNATIONAL INC. Page No. : 27 of 67
TEL: 886-3-3273456 Report Version : Rev. 01




Report No.: FR450701AC

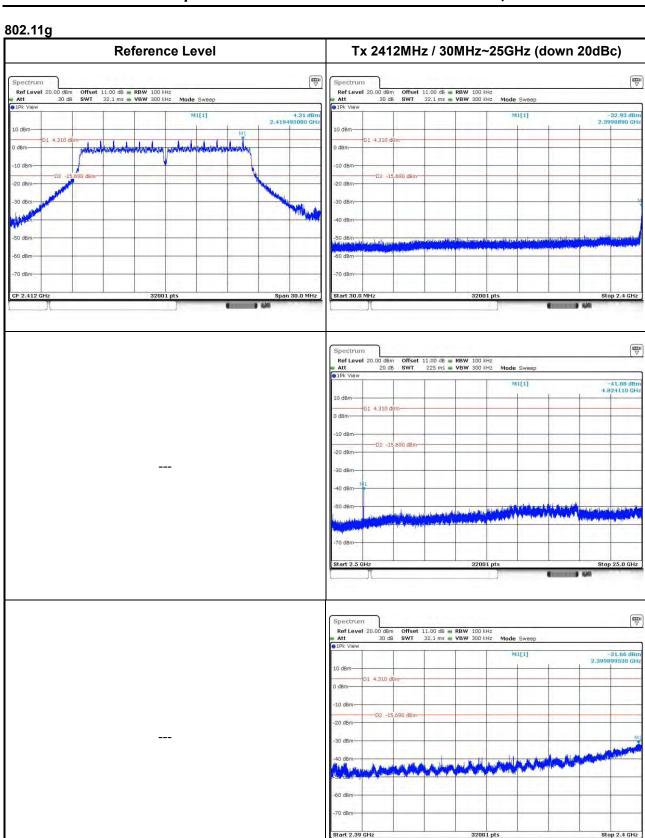

SPORTON INTERNATIONAL INC. Page No. : 28 of 67 TEL: 886-3-3273456 Report Version : Rev. 01

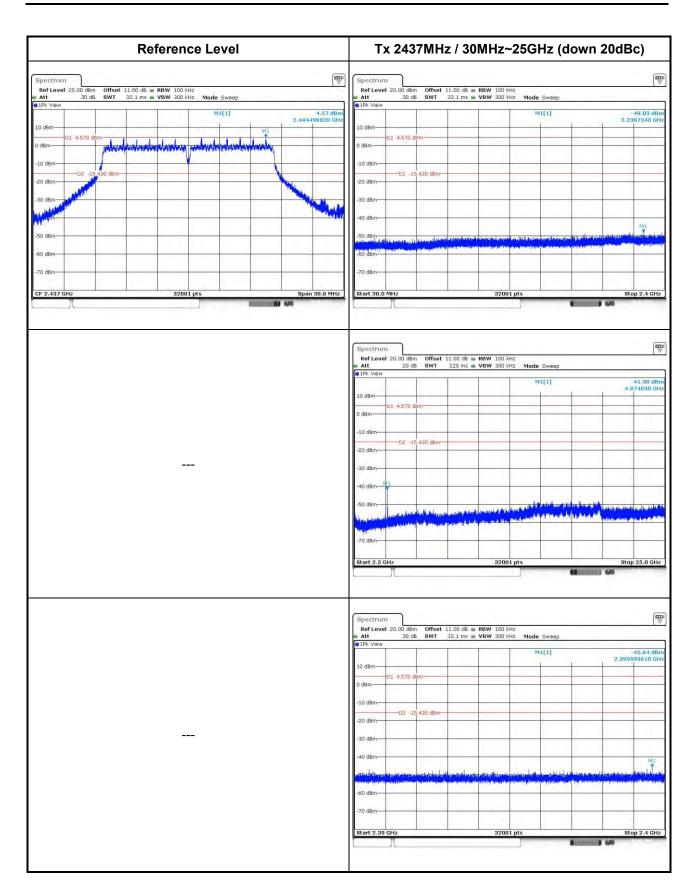


SPORTON INTERNATIONAL INC. Page No. : 29 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

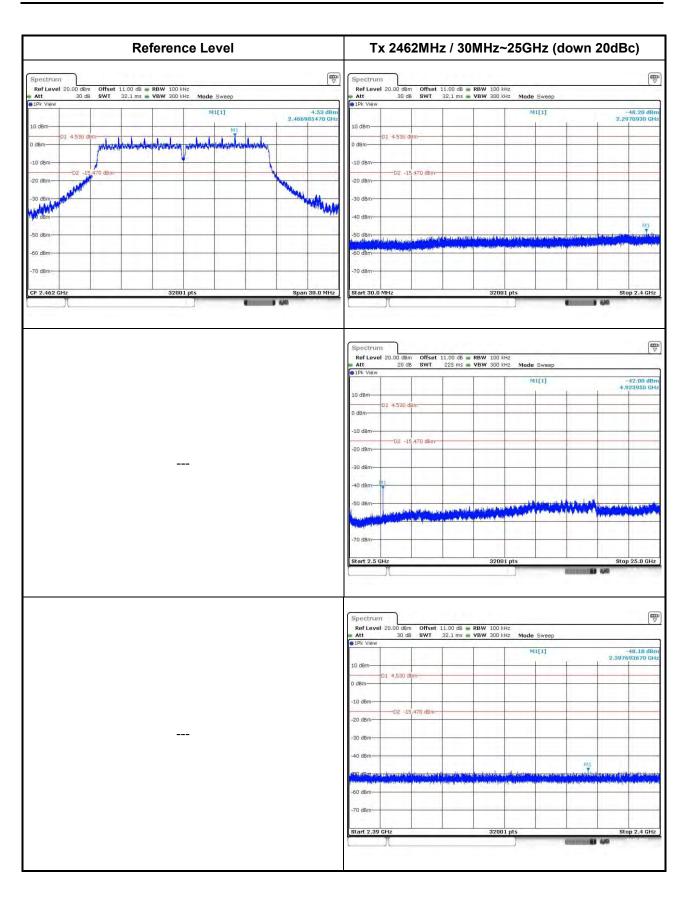

SPORTON INTERNATIONAL INC. Page No. : 30 of 67
TEL: 886-3-3273456 Report Version : Rev. 01




802.11n HT20

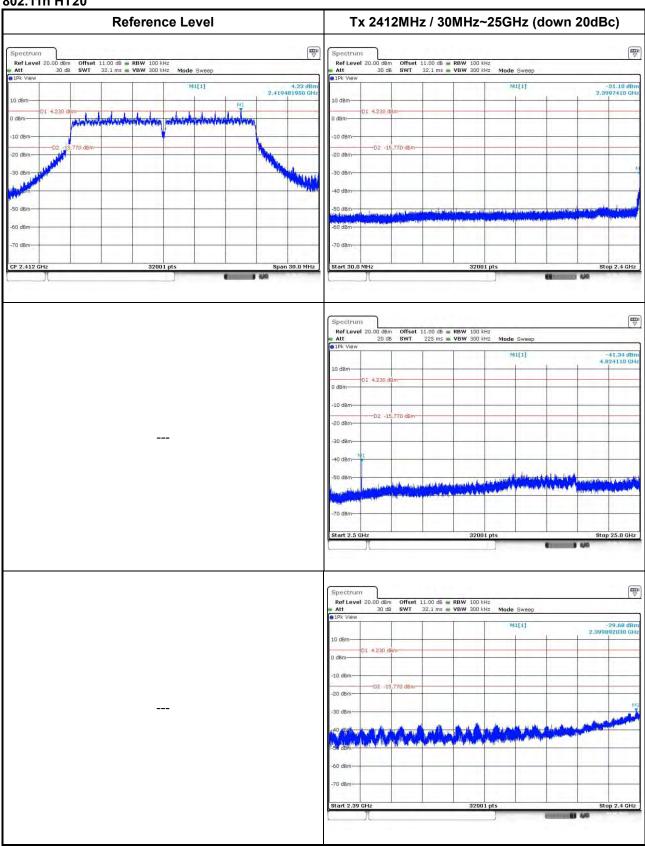


SPORTON INTERNATIONAL INC.

TEL: 886-3-3273456 FAX: 886-3-3270973 Page No. : 31 of 67 Report Version : Rev. 01

Report No.: FR450701AC

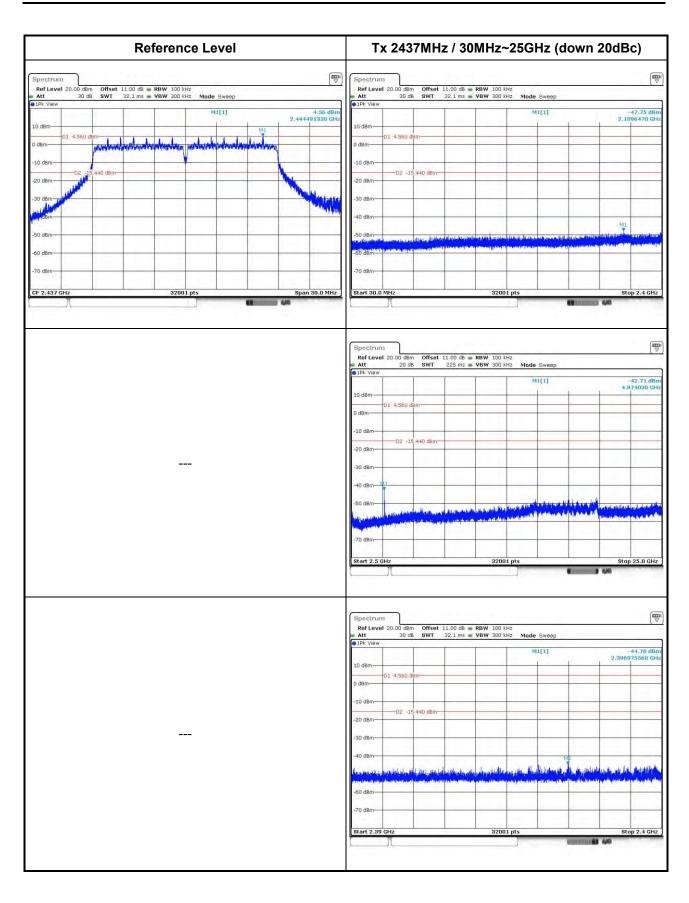


SPORTON INTERNATIONAL INC. Page No. : 32 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

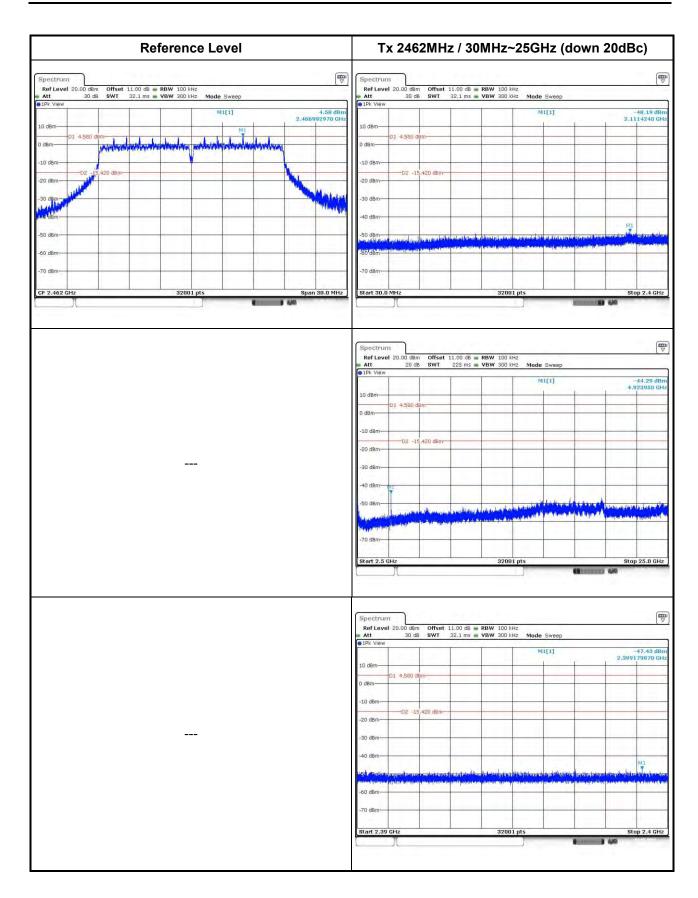

SPORTON INTERNATIONAL INC. Page No. : 33 of 67
TEL: 886-3-3273456 Report Version : Rev. 01




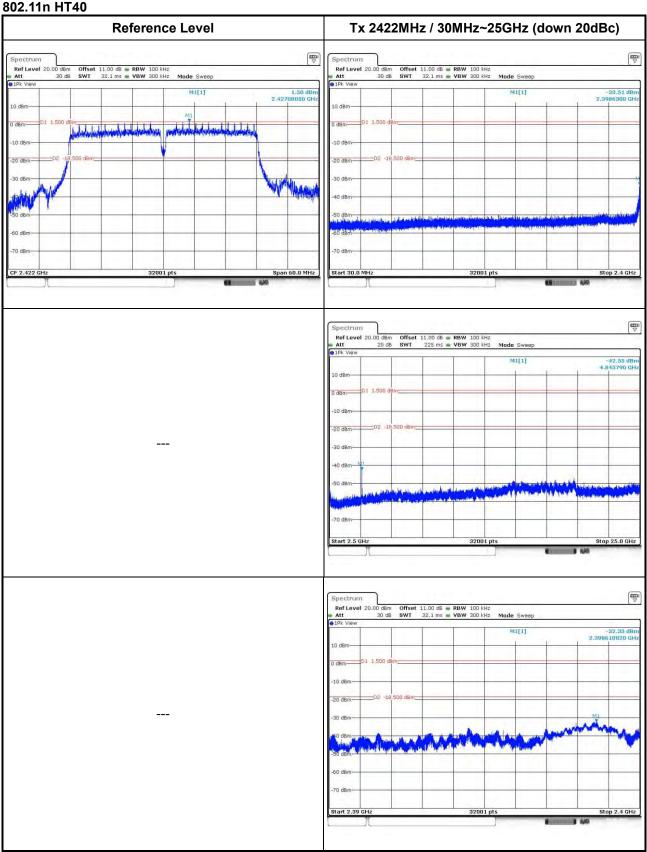


SPORTON INTERNATIONAL INC.

TEL: 886-3-3273456 FAX: 886-3-3270973 Page No. : 34 of 67 Report Version : Rev. 01

Report No.: FR450701AC

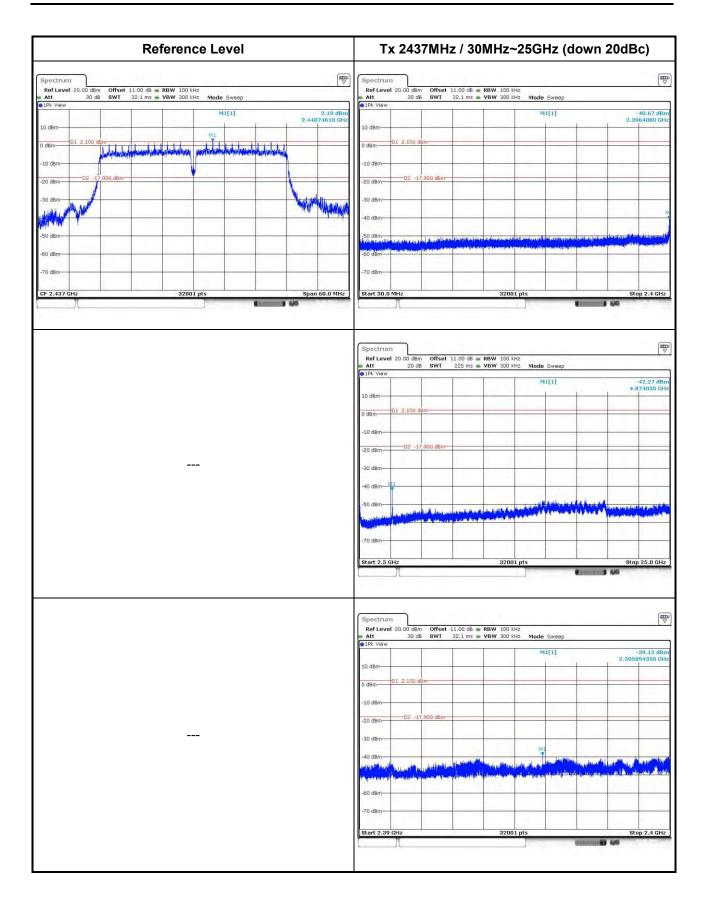

SPORTON INTERNATIONAL INC. Page No. : 35 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

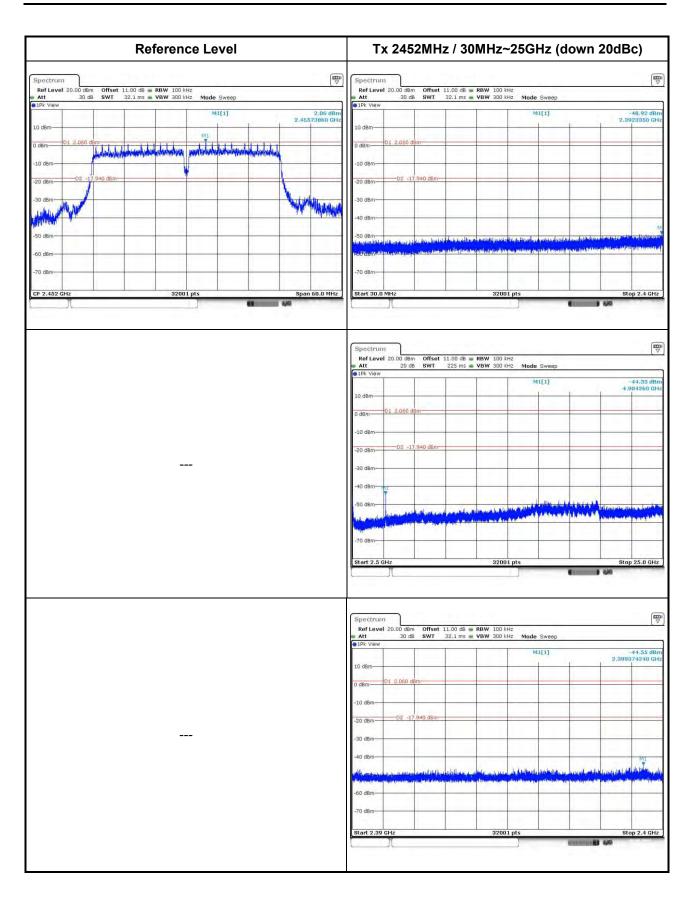

SPORTON INTERNATIONAL INC. Page No. : 36 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	88~216 150		3						
216~960	216~960 200		3						
Above 960	500	54	3						

Report No.: FR450701AC

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit						
RF output power procedure	Limit (dB)					
Peak output power procedure	20					
Average output power procedure	30					

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 37 of 67
TEL: 886-3-3273456 Report Version : Rev. 01




FCC Test Report No.: FR450701AC

3.6.3 Test Procedures

 	Test Method							
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).								
For	the transmitter unwanted emissions shall be measured using following options below:							
\boxtimes	Refer as FCC KDB 558074 v03r02, clause 11 for unwanted emissions into non-restricted bands.							
\boxtimes	Refer as FCC KDB 558074 v03r02, clause 12 for unwanted emissions into restricted bands.							
	Refer as FCC KDB 558074 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cycle ≥98%)							
	Refer as FCC KDB 558074 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty factor).							
	Refer as FCC KDB 558074 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T).							
	☐ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time							
	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.							
	Refer as FCC KDB 558074 v03r02, clause 12.2.4 measurement procedure peak limit.							
	Refer as FCC KDB 558074 v03r02, clause 12.2.3 measurement procedure Quasi-Peak limit.							
For	radiated measurement, refer as FCC KDB 558074 v03r02, clause 12.2.7							
\boxtimes	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.							
\boxtimes	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.							
\boxtimes	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.							
	Test Method							
For	conducted and cabinet radiation measurement, refer as FCC KDB 558074 v03r02, clause 12.2							
	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.							
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB							

SPORTON INTERNATIONAL INC. Page No. : 38 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

3.6.4 Test Setup

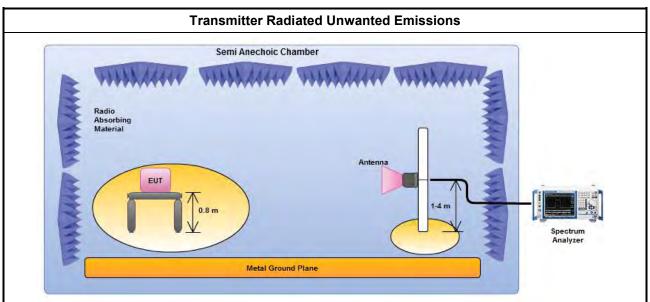

Report No.: FR450701AC

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.


Note: Test distance is 3m.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

SPORTON INTERNATIONAL INC. Page No. : 39 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)



Report No.: FR450701AC

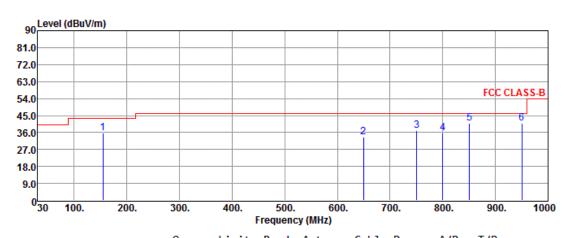

			Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	1/Pos	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	154.16	35.62	-7.88	43.50	52.35	14.10	0.80	31.63			Peak
2	649.83	33.54	-12.46	46.00	42.58	20.60	1.78	31.42			Peak
3	750.71	37.08	-8.92	46.00	44.48	22.11	1.88	31.39			Peak
4	800.18	35.55	-10.45	46.00	42.23	22.70	1.98	31.36			Peak
5	850.62	41.00	-5.00	46.00	47.28	23.01	2.08	31.37			Peak
6	950.53	40.73	-5.27	46.00	45.81	24.10	2.18	31.36			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 40 of 67
TEL: 886-3-3273456 Report Version : Rev. 01




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode HT20 Test Freq. (MHz) 2412

Polarization V

Report No.: FR450701AC

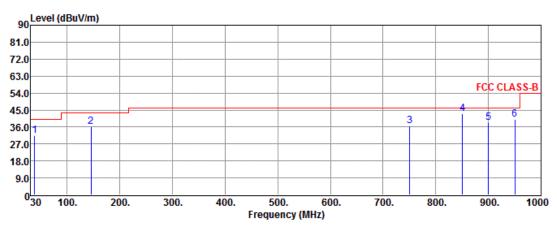

			0ver	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	37.76	31.31	-8.69	40.00	48.53	14.12	0.47	31.81			Peak
2	145.43	36.14	-7.36	43.50	53.14	13.87	0.77	31.64			Peak
3	750.71	36.70	-9.30	46.00	44.10	22.11	1.88	31.39			Peak
4	850.62	42.97	-3.03	46.00	49.25	23.01	2.08	31.37	106	289	QP
5	900.09	38.50	-7.50	46.00	44.03	23.70	2.14	31.37			Peak
6	950.53	40.24	-5.76	46.00	45.32	24.10	2.18	31.36			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 41 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode11bTest Freq. (MHz)2412							
N _{TX}	1 Polariza		Н				

Report No.: FR450701AC

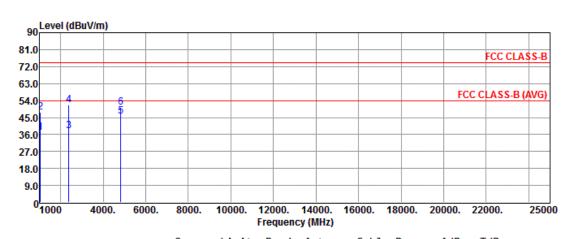

			0ver	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	36.89	-17.11	54.00	46.35	25.08	3.10	37.64			Average
2	1050.00	47.95	-26.05	74.00	57.41	25.08	3.10	37.64			Peak
3	2390.00	37.71	-16.29	54.00	40.53	27.21	4.60	34.63			Average
4	2390.00	51.73	-22.27	74.00	54.55	27.21	4.60	34.63			Peak
5	4824.00	45.72	-8.28	54.00	40.63	31.52	6.74	33.17			Average
6	4824.00	50.29	-23.71	74.00	45.20	31.52	6.74	33.17			Peak

SPORTON INTERNATIONAL INC. Page No. : 42 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	11b	Test Freq. (MHz)	2412				
N _{TX}	1	Polarization	V				

Report No.: FR450701AC

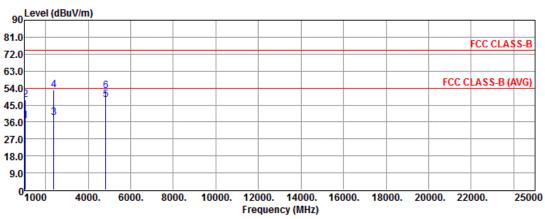

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	36.81	-17.19	54.00	46.27	25.08	3.10	37.64			Average
2	1050.00	47.87	-26.13	74.00	57.33	25.08	3.10	37.64			Peak
3	2390.00	38.52	-15.48	54.00	41.34	27.21	4.60	34.63			Average
4	2390.00	52.77	-21.23	74.00	55.59	27.21	4.60	34.63			Peak
5	4824.00	47.76	-6.24	54.00	42.67	31.52	6.74	33.17			Average
6	4824.00	52.44	-21.56	74.00	47.35	31.52	6.74	33.17			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 43 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode11bTest Freq. (MHz)2437							
N _{TX}	1		Н				

Report No.: FR450701AC

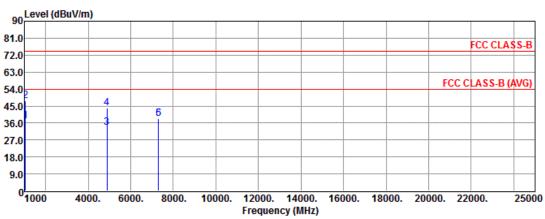

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	37.13	-16.87	54.00	46.59	25.08	3.10	37.64			Average
2	1050.00	47.98	-26.02	74.00	57.44	25.08	3.10	37.64			Peak
3	4874.00	33.74	-20.26	54.00	28.56	31.60	6.73	33.15			Average
4	4874.00	43.90	-30.10	74.00	38.72	31.60	6.73	33.15			Peak
5	7311.00	38.35	-15.65	54.00	27.61	36.28	8.98	34.52			Average
6	7311.00	38.14	-35.86	74.00	27.40	36.28	8.98	34.52			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 44 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode 11b Test Freq. (MHz) 2437							
N _{TX}	N _{TX} 1		V				

Report No.: FR450701AC

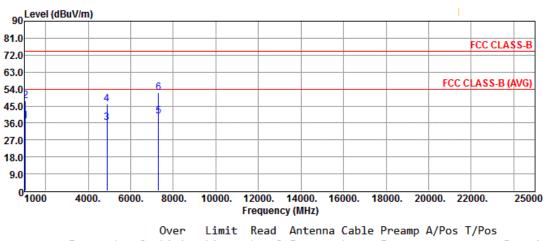

	Freq	Level				Antenna Factor			-	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	37.08	-16.92	54.00	46.54	25.08	3.10	37.64			Average
2	1050.00	47.72	-26.28	74.00	57.18	25.08	3.10	37.64			Peak
3	4874.00	36.24	-17.76	54.00	31.06	31.60	6.73	33.15			Average
4	4874.00	46.11	-27.89	74.00	40.93	31.60	6.73	33.15			Peak
5	7311.00	39.42	-14.58	54.00	28.68	36.28	8.98	34.52			Average
6	7311.00	51.91	-22.09	74.00	41.17	36.28	8.98	34.52			Peak

SPORTON INTERNATIONAL INC. Page No. : 45 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode 11b Test Freq. (MHz) 2462								
N _{TX}	1	Polarization	Н						

Report No.: FR450701AC

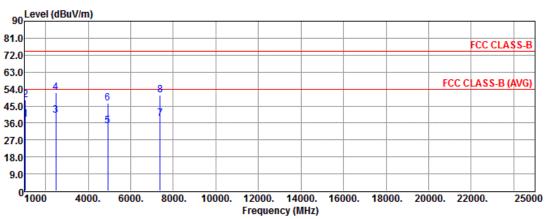

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	37.78	-16.22	54.00	47.24	25.08	3.10	37.64			Average
2	1050.00	48.22	-25.78	74.00	57.68	25.08	3.10	37.64			Peak
3	2483.50	40.12	-13.88	54.00	42.51	27.46	4.74	34.59			Average
4	2483.50	52.08	-21.92	74.00	54.47	27.46	4.74	34.59			Peak
5	4924.00	34.59	-19.41	54.00	29.31	31.68	6.73	33.13			Average
6	4924.00	46.55	-27.45	74.00	41.27	31.68	6.73	33.13			Peak
7	7386.00	38.28	-15.72	54.00	27.44	36.45	9.01	34.62			Average
8	7386.00	50.71	-23.29	74.00	39.87	36.45	9.01	34.62			Peak

SPORTON INTERNATIONAL INC. Page No. : 46 of 67 TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11b	Test Freq. (MHz)	2462						
N _{TX}	1	Polarization	V						

Report No.: FR450701AC

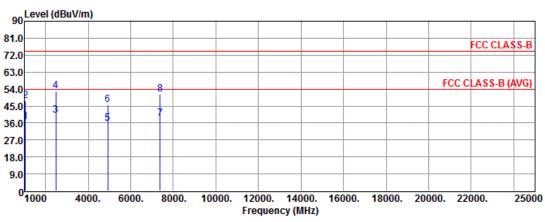

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	36.80	-17.20	54.00	46.26	25.08	3.10	37.64			Average
2	1050.00	47.70	-26.30	74.00	57.16	25.08	3.10	37.64			Peak
3	2483.50	40.19	-13.81	54.00	42.58	27.46	4.74	34.59			Average
4	2483.50	53.13	-20.87	74.00	55.52	27.46	4.74	34.59			Peak
5	4924.00	35.55	-18.45	54.00	30.27	31.68	6.73	33.13			Average
6	4924.00	45.81	-28.19	74.00	40.53	31.68	6.73	33.13			Peak
7	7386.00	38.18	-15.82	54.00	27.34	36.45	9.01	34.62			Average
8	7386.00	51.20	-22.80	74.00	40.36	36.45	9.01	34.62			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 47 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g



Report No.: FR450701AC

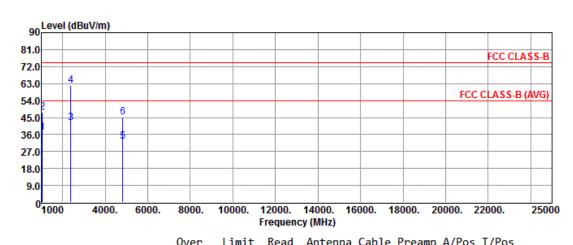

				over	LIMIT	read	Antenna	cabie	rreamp	A/POS	1/205	
		Freq	Level	Limit	Line	Level	Factor	Loss	Factor			Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1		1050.00	37.05	-16.95	54.00	46.51	25.08	3.10	37.64			Average
2	2	1050.00	47.82	-26.18	74.00	57.28	25.08	3.10	37.64			Peak
3	}	2390.00	42.22	-11.78	54.00	45.04	27.21	4.60	34.63			Average
4	ļ	2390.00	61.94	-12.06	74.00	64.76	27.21	4.60	34.63			Peak
5	,	4824.00	32.25	-21.75	54.00	27.16	31.52	6.74	33.17			Average
6	5	4824.00	45.33	-28.67	74.00	40.24	31.52	6.74	33.17			Peak

SPORTON INTERNATIONAL INC. Page No. : 48 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g	Test Freq. (MHz)	2412						
N _{TX}	Polarization	V							

Report No.: FR450701AC

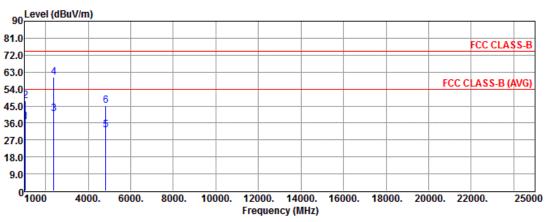

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	36.79	-17.21	54.00	46.25	25.08	3.10	37.64			Average
2	1050.00	47.89	-26.11	74.00	57.35	25.08	3.10	37.64			Peak
3	2390.00	40.77	-13.23	54.00	43.59	27.21	4.60	34.63			Average
4	2390.00	60.14	-13.86	74.00	62.96	27.21	4.60	34.63			Peak
5	4824.00	32.42	-21.58	54.00	27.33	31.52	6.74	33.17			Average
6	4824.00	45.15	-28.85	74.00	40.06	31.52	6.74	33.17			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 49 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g	Test Freq. (MHz)	2437						
N _{TX}	1	Polarization	Н						

Report No.: FR450701AC

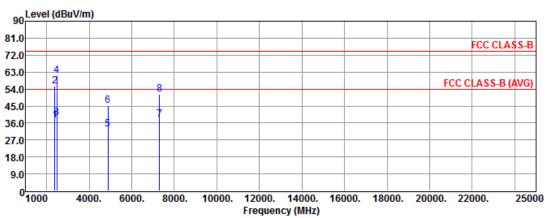

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	37.32	-16.68	54.00	40.14	27.21	4.60	34.63			Average
2	2390.00	55.61	-18.39	74.00	58.43	27.21	4.60	34.63			Peak
3	2483.50	38.85	-15.15	54.00	41.24	27.46	4.74	34.59			Average
4	2483.50	61.19	-12.81	74.00	63.58	27.46	4.74	34.59			Peak
5	4874.00	32.69	-21.31	54.00	27.51	31.60	6.73	33.15			Average
6	4874.00	45.40	-28.60	74.00	40.22	31.60	6.73	33.15			Peak
7	7311.00	38.09	-15.91	54.00	27.35	36.28	8.98	34.52			Average
8	7311.00	51.05	-22.95	74.00	40.31	36.28	8.98	34.52			Peak

SPORTON INTERNATIONAL INC. Page No. : 50 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g	Test Freq. (MHz)	2437						
N _{TX}	1	Polarization	V						

Report No.: FR450701AC

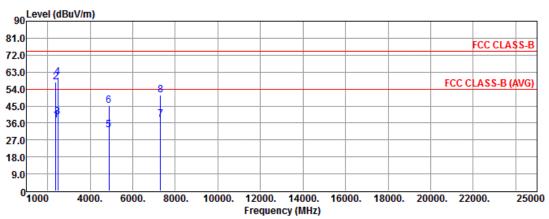

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	37.65	-16.35	54.00	40.47	27.21	4.60	34.63			Average
2	2390.00	57.56	-16.44	74.00	60.38	27.21	4.60	34.63			Peak
3	2483.50	39.05	-14.95	54.00	41.44	27.46	4.74	34.59			Average
4	2483.50	60.50	-13.50	74.00	62.89	27.46	4.74	34.59			Peak
5	4874.00	32.40	-21.60	54.00	27.22	31.60	6.73	33.15			Average
6	4874.00	45.36	-28.64	74.00	40.18	31.60	6.73	33.15			Peak
7	7311.00	38.05	-15.95	54.00	27.31	36.28	8.98	34.52			Average
8	7311.00	50.98	-23.02	74.00	40.24	36.28	8.98	34.52			Peak

SPORTON INTERNATIONAL INC. Page No. : 51 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	11g	Test Freq. (MHz)	2462					
N _{TX}	1	Polarization	Н					

Report No.: FR450701AC

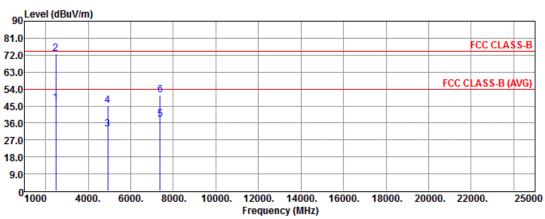

	Freq	Level				Antenna Factor			-	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	46.53	-7.47	54.00	48.92	27.46	4.74	34.59			Average
2	2483.50	72.95	-1.05	74.00	75.34	27.46	4.74	34.59			Peak
3	4924.00	32.59	-21.41	54.00	27.31	31.68	6.73	33.13			Average
4	4924.00	45.43	-28.57	74.00	40.15	31.68	6.73	33.13			Peak
5	7386.00	38.00	-16.00	54.00	27.16	36.45	9.01	34.62			Average
6	7386.00	50.73	-23.27	74.00	39.89	36.45	9.01	34.62			Peak

SPORTON INTERNATIONAL INC. Page No. : 52 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	11g	Test Freq. (MHz)	2462					
N _{TX}	1	Polarization	V					

Report No.: FR450701AC

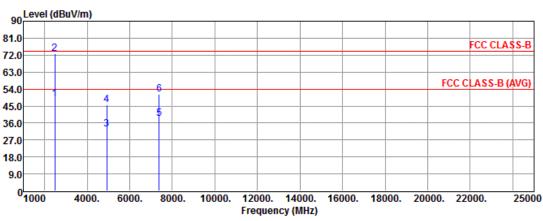

	Freq	Level				Antenna Factor				T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	48.63	-5.37	54.00	51.02	27.46	4.74	34.59			Average
2	2483.50	72.82	-1.18	74.00	75.21	27.46	4.74	34.59			Peak
3	4924.00	32.84	-21.16	54.00	27.56	31.68	6.73	33.13			Average
4	4924.00	45.66	-28.34	74.00	40.38	31.68	6.73	33.13			Peak
5	7386.00	38.37	-15.63	54.00	27.53	36.45	9.01	34.62			Average
6	7386.00	51.11	-22.89	74.00	40.27	36.45	9.01	34.62			Peak

SPORTON INTERNATIONAL INC. Page No. : 53 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20	Test Freq. (MHz)	2412						
N _{TX}	1	Polarization	Н						

Report No.: FR450701AC

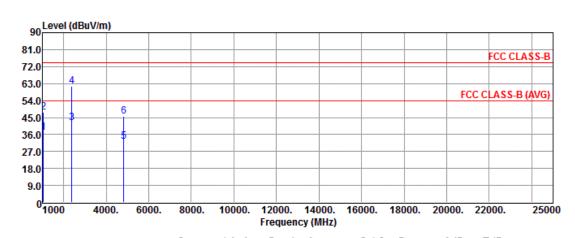

			Over	Limit	Kead	Antenna	Capte	Preamp	A/Pos	I/Pos	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	36.88	-17.12	54.00	46.34	25.08	3.10	37.64			Average
2	1050.00	47.80	-26.20	74.00	57.26	25.08	3.10	37.64			Peak
3	2390.00	42.40	-11.60	54.00	45.22	27.21	4.60	34.63			Average
4	2390.00	61.55	-12.45	74.00	64.37	27.21	4.60	34.63			Peak
5	4824.00	32.12	-21.88	54.00	27.03	31.52	6.74	33.17			Average
6	4824.00	45.57	-28.43	74.00	40.48	31.52	6.74	33.17			Peak

SPORTON INTERNATIONAL INC. Page No. : 54 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT20	Test Freq. (MHz)	2412					
N _{TX}	1	Polarization	V					

Report No.: FR450701AC

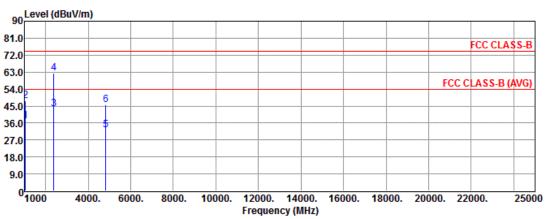

			0ver	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1050.00	36.85	-17.15	54.00	46.31	25.08	3.10	37.64			Average
2	1050.00	48.01	-25.99	74.00	57.47	25.08	3.10	37.64			Peak
3	2390.00	43.42	-10.58	54.00	46.24	27.21	4.60	34.63			Average
4	2390.00	62.44	-11.56	74.00	65.26	27.21	4.60	34.63			Peak
5	4824.00	32.33	-21.67	54.00	27.24	31.52	6.74	33.17			Average
6	4824.00	45.44	-28.56	74.00	40.35	31.52	6.74	33.17			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 55 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT20	Test Freq. (MHz)	2437					
N _{TX}	1	Polarization	Н					

Report No.: FR450701AC

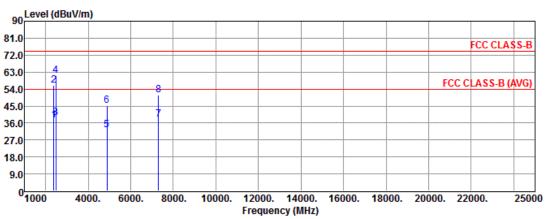

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	37.43	-16.57	54.00	40.25	27.21	4.60	34.63			Average
2	2390.00	55.85	-18.15	74.00	58.67	27.21	4.60	34.63			Peak
3	2483.50	38.72	-15.28	54.00	41.11	27.46	4.74	34.59			Average
4	2483.50	60.96	-13.04	74.00	63.35	27.46	4.74	34.59			Peak
5	4874.00	32.45	-21.55	54.00	27.27	31.60	6.73	33.15			Average
6	4874.00	45.33	-28.67	74.00	40.15	31.60	6.73	33.15			Peak
7	7311.00	38.06	-15.94	54.00	27.32	36.28	8.98	34.52			Average
8	7311.00	50.92	-23.08	74.00	40.18	36.28	8.98	34.52			Peak

SPORTON INTERNATIONAL INC. Page No. : 56 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT20	Test Freq. (MHz)	2437					
N _{TX}	1	Polarization	V					

Report No.: FR450701AC

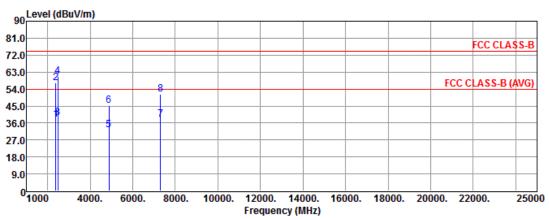

	Freq	Level	Over Limit			Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	37.81	-16.19	54.00	40.63	27.21	4.60	34.63			Average
2	2390.00	57.44	-16.56	74.00	60.26	27.21	4.60	34.63			Peak
3	2483.50	38.78	-15.22	54.00	41.17	27.46	4.74	34.59			Average
4	2483.50	60.63	-13.37	74.00	63.02	27.46	4.74	34.59			Peak
5	4874.00	32.34	-21.66	54.00	27.16	31.60	6.73	33.15			Average
6	4874.00	45.43	-28.57	74.00	40.25	31.60	6.73	33.15			Peak
7	7311.00	37.98	-16.02	54.00	27.24	36.28	8.98	34.52			Average
8	7311.00	51.11	-22.89	74.00	40.37	36.28	8.98	34.52			Peak

SPORTON INTERNATIONAL INC. Page No. : 57 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20	Test Freq. (MHz)	2462						
N _{TX}	1	Polarization	Н						

Report No.: FR450701AC

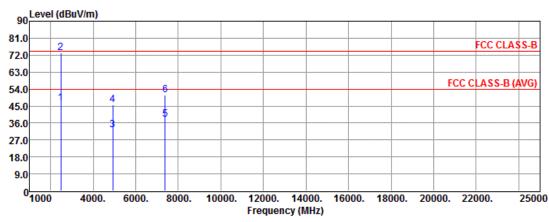

	Freq	Level				Antenna Factor				T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	46.35	-7.65	54.00	48.74	27.46	4.74	34.59			Average
2	2483.50	73.00	-1.00	74.00	75.39	27.46	4.74	34.59			Peak
3	4924.00	32.44	-21.56	54.00	27.16	31.68	6.73	33.13			Average
4	4924.00	45.56	-28.44	74.00	40.28	31.68	6.73	33.13			Peak
5	7386.00	37.86	-16.14	54.00	27.02	36.45	9.01	34.62			Average
6	7386.00	50.73	-23.27	74.00	39.89	36.45	9.01	34.62			Peak

SPORTON INTERNATIONAL INC. Page No. : 58 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20	Test Freq. (MHz)	2462						
N _{TX}	1	Polarization	V						

Report No.: FR450701AC

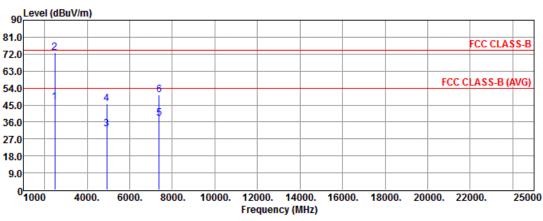

	Freq	Level				Antenna Factor				T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	46.51	-7.49	54.00	48.90	27.46	4.74	34.59			Average
2	2483.50	72.66	-1.34	74.00	75.05	27.46	4.74	34.59			Peak
3	4924.00	32.50	-21.50	54.00	27.22	31.68	6.73	33.13			Average
4	4924.00	45.63	-28.37	74.00	40.35	31.68	6.73	33.13			Peak
5	7386.00	38.07	-15.93	54.00	27.23	36.45	9.01	34.62			Average
6	7386.00	50.19	-23.81	74.00	39.35	36.45	9.01	34.62			Peak

SPORTON INTERNATIONAL INC. Page No. : 59 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT40	Test Freq. (MHz)	2422						
N_{TX}	1	Polarization	Н						

Report No.: FR450701AC

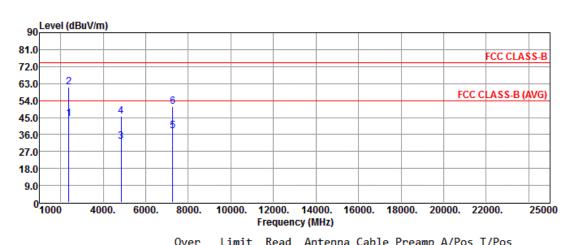

			over	LIMIC	read	Antenna	cabie	rreamp	A/POS	1/205	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	44.50	-9.50	54.00	47.32	27.21	4.60	34.63			Average
2	2390.00	61.23	-12.77	74.00	64.05	27.21	4.60	34.63			Peak
3	4844.00	32.28	-21.72	54.00	27.15	31.55	6.74	33.16			Average
4	4844.00	45.43	-28.57	74.00	40.30	31.55	6.74	33.16			Peak
5	7266.00	37.84	-16.16	54.00	27.16	36.19	8.95	34.46			Average
6	7266.00	50.99	-23.01	74.00	40.31	36.19	8.95	34.46			Peak

SPORTON INTERNATIONAL INC. Page No. : 60 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT40	Test Freq. (MHz)	2422						
N _{TX}	1	Polarization	V						

Report No.: FR450701AC

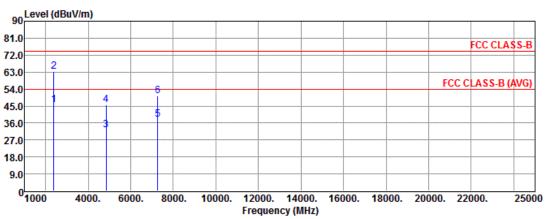

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	45.77	-8.23	54.00	48.59	27.21	4.60	34.63			Average
2	2390.00	63.36	-10.64	74.00	66.18	27.21	4.60	34.63			Peak
3	4844.00	32.39	-21.61	54.00	27.26	31.55	6.74	33.16			Average
4	4844.00	45.51	-28.49	74.00	40.38	31.55	6.74	33.16			Peak
5	7266.00	37.99	-16.01	54.00	27.31	36.19	8.95	34.46			Average
6	7266.00	50.51	-23.49	74.00	39.83	36.19	8.95	34.46			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 61 of 67
TEL: 886-3-3273456 Report Version : Rev. 01



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40	Test Freq. (MHz)	2437					
N _{TX}	1	Polarization	Н					

Report No.: FR450701AC

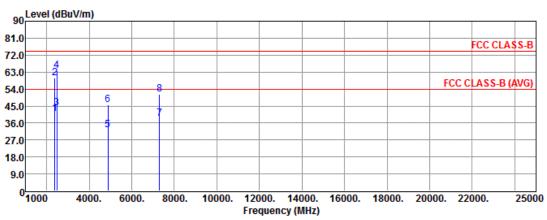

	Freq	Level	Over Limit			Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	40.90	-13.10	54.00	43.72	27.21	4.60	34.63			Average
2	2390.00	59.69	-14.31	74.00	62.51	27.21	4.60	34.63			Peak
3	2483.50	44.13	-9.87	54.00	46.52	27.46	4.74	34.59			Average
4	2483.50	63.79	-10.21	74.00	66.18	27.46	4.74	34.59			Peak
5	4874.00	32.38	-21.62	54.00	27.20	31.60	6.73	33.15			Average
6	4874.00	45.49	-28.51	74.00	40.31	31.60	6.73	33.15			Peak
7	7311.00	38.19	-15.81	54.00	27.45	36.28	8.98	34.52			Average
8	7311.00	51.27	-22.73	74.00	40.53	36.28	8.98	34.52			Peak

SPORTON INTERNATIONAL INC. Page No. : 62 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40	Test Freq. (MHz)	2437					
N _{TX}	1	Polarization	V					

Report No.: FR450701AC

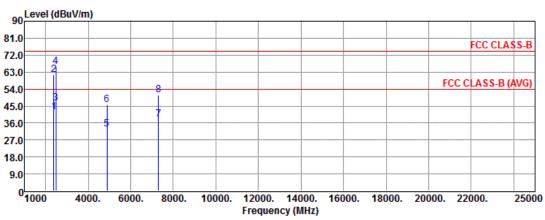

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	41.57	-12.43	54.00	44.39	27.21	4.60	34.63			Average
2	2390.00	61.45	-12.55	74.00	64.27	27.21	4.60	34.63			Peak
3	2483.50	46.30	-7.70	54.00	48.69	27.46	4.74	34.59			Average
4	2483.50	66.02	-7.98	74.00	68.41	27.46	4.74	34.59			Peak
5	4874.00	32.59	-21.41	54.00	27.41	31.60	6.73	33.15			Average
6	4874.00	45.67	-28.33	74.00	40.49	31.60	6.73	33.15			Peak
7	7311.00	38.06	-15.94	54.00	27.32	36.28	8.98	34.52			Average
8	7311.00	50.93	-23.07	74.00	40.19	36.28	8.98	34.52			Peak

SPORTON INTERNATIONAL INC. Page No. : 63 of 67
TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	HT40	Test Freq. (MHz)	2452			
N _{TX}	1	Polarization	Н			

Report No.: FR450701AC

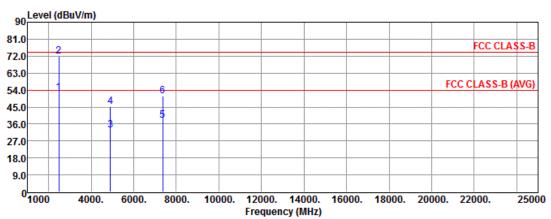

	Freq	Level				Antenna Factor			•	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	52.59	-1.41	54.00	54.98	27.46	4.74	34.59			Average
2	2483.50	71.90	-2.10	74.00	74.29	27.46	4.74	34.59			Peak
3	4904.00	32.59	-21.41	54.00	27.35	31.65	6.73	33.14			Average
4	4904.00	45.43	-28.57	74.00	40.19	31.65	6.73	33.14			Peak
5	7356.00	38.02	-15.98	54.00	27.22	36.38	9.00	34.58			Average
6	7356.00	50.98	-23.02	74.00	40.18	36.38	9.00	34.58			Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 64 of 67 TEL: 886-3-3273456 Report Version : Rev. 01



Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	HT40	Test Freq. (MHz)	2452			
N _{TX}	1	Polarization	V			

Report No.: FR450701AC

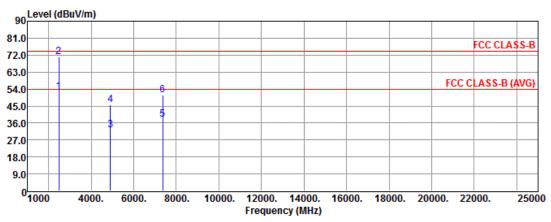

	Freq	Level				Antenna Factor			-	T/Pos	Remark
	MHZ	dBuV/m	dВ	dBuV/m	dBuV	dB/m	dВ	dB	cm	deg	
1	2483.50	52.47	-1.53	54.00	54.86	27.46	4.74	34.59			Average
2	2483.50	71.19	-2.81	74.00	73.58	27.46	4.74	34.59			Peak
3	4904.00	32.50	-21.50	54.00	27.26	31.65	6.73	33.14			Average
4	4904.00	45.82	-28.18	74.00	40.58	31.65	6.73	33.14			Peak
5	7356.00	38.04	-15.96	54.00	27.24	36.38	9.00	34.58			Average
6	7356.00	50.91	-23.09	74.00	40.11	36.38	9.00	34.58			Peak

SPORTON INTERNATIONAL INC. Page No. : 65 of 67 TEL: 886-3-3273456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2013	Radiation (03CH03-HY)
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation (03CH03-HY)
Receiver	R&S	ESR3	101657	9KHz – 3GHz	Jan. 18, 2014	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Report No.: FR450701AC

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	EM	EM18G40G	060604	18GHz ~ 40GHz	Oct. 17.2013	Radiation (03CH03-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

SPORTON INTERNATIONAL INC. Page No. : 66 of 67 TEL: 886-3-3273456 Report Version : Rev. 01



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2014	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 21, 2014	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-01-04	N/A	Feb. 25, 2014	Conduction (CO04-HY)

Report No.: FR450701AC

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101063	9KHz~40GHz	Feb. 17, 2014	Conducted (TH01-HY)
Spectrum Analyzer	Agilent	N9010A	MY53400091	9KHz~44GHz	Oct. 07, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20- SP-SD	MAA1112-007	-20 ~ 100℃	Nov. 21, 2013	Conducted (TH01-HY)
Signal Generator	R&S	SMB100A	175727	10MHz ~ 40GHz	Jan. 07, 2014	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1207366	300MHz ~ 40GHz	Oct. 24, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1241002	300MHz ~ 40GHz	Oct. 24, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

SPORTON INTERNATIONAL INC. Page No. : 67 of 67 TEL: 886-3-3273456 Report Version : Rev. 01