

FCC Test Report

Report No.: RF190604C42-1

FCC ID: KA2IR1750A1

Test Model: DIR-1750

Received Date: Jun. 04, 2019

Test Date: Jun. 13 ~ Jun. 22, 2019

Issued Date: Jul. 03, 2019

Applicant: D-Link Corporation

Address: 17595 Mt. Herrmann, Fountain Valley, California, United States, 92708

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards.....	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	14
4.1.2 Test Instruments.....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results.....	19
4.2 Conducted Emission Measurement.....	39
4.2.1 Limits of Conducted Emission Measurement.....	39
4.2.2 Test Instruments.....	39
4.2.3 Test Procedures.....	40
4.2.4 Deviation from Test Standard.....	40
4.2.5 Test Setup.....	40
4.2.6 EUT Operating Conditions.....	40
4.2.7 Test Results.....	41
4.3 Transmit Power Measurement.....	43
4.3.1 Limits of Transmit Power Measurement.....	43
4.3.2 Test Setup.....	43
4.3.3 Test Instruments.....	43
4.3.4 Test Procedure.....	43
4.3.5 Deviation from Test Standard.....	43
4.3.6 EUT Operating Conditions.....	43
4.3.7 Test Result.....	44
4.4 Occupied Bandwidth Measurement.....	46
4.4.1 Test Setup.....	46
4.4.2 Test Instruments.....	46
4.4.3 Test Procedure.....	46
4.4.4 Test Result.....	47
4.5 Peak Power Spectral Density Measurement.....	49
4.5.1 Limits of Peak Power Spectral Density Measurement.....	49
4.5.2 Test Setup.....	49
4.5.3 Test Instruments.....	49
4.5.4 Test Procedures.....	49
4.5.5 Deviation from Test Standard.....	50
4.5.6 EUT Operating Conditions.....	50
4.5.7 Test Results.....	51
4.6 Frequency Stability.....	56
4.6.1 Limits of Frequency Stability Measurement.....	56

4.6.2	Test Setup.....	56
4.6.3	Test Instruments	56
4.6.4	Test Procedure	56
4.6.5	Deviation from Test Standard	57
4.6.6	EUT Operating Condition	57
4.6.7	Test Results	57
4.7	6dB Bandwidth Measurement.....	58
4.7.1	Limits of 6dB Bandwidth Measurement.....	58
4.7.2	Test Setup.....	58
4.7.3	Test Instruments	58
4.7.4	Test Procedure	58
4.7.5	Deviation from Test Standard	58
4.7.6	EUT Operating Condition	58
4.7.7	Test Results	59
5	Pictures of Test Arrangements.....	61
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band).....	62
	Appendix – Information of the Testing Laboratories	65

Release Control Record

Issue No.	Description	Date Issued
RF190604C42-1	Original release	Jul. 03, 2019

1 Certificate of Conformity

Product: AC1750 Gigabit Wi-Fi Router

Brand: D-Link

Test Model: DIR-1750

Sample Status: Engineering sample

Applicant: D-Link Corporation

Test Date: Jun. 13 ~ Jun. 22, 2019

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Jul. 03, 2019
Celine Chou / Senior Specialist

Approved by : Bruce Chen , **Date:** Jul. 03, 2019
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -13.12dB at 0.16526MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.2dB at 10480.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Note:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC1750 Gigabit Wi-Fi Router
Brand	D-Link
Test Model	DIR-1750
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
Operating Frequency	5180 ~ 5240MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	CDD Mode: 5180 ~ 5240MHz: 344.784mW 5745 ~ 5825MHz: 286.159mW Beamforming Mode: 5180 ~ 5240MHz: 344.784mW 5745 ~ 5825MHz: 286.159mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11a	Not Support	3TX
802.11n (HT20)	Support	3TX
802.11n (HT40)	Support	3TX
802.11ac (VHT20)	Support	3TX
802.11ac (VHT40)	Support	3TX
802.11ac (VHT80)	Support	3TX

* The bandwidth and modulation are similar for HT20/HT40 on 802.11n mode and VHT20/VHT40 on 802.11ac mode, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

2. The EUT consumes power from the following adapters.

Adapter 1	
Brand	D-Link
Model	2ABB018F US
Input Power	100-240Vac, 50/60Hz, 0.6A
Output Power	12Vdc, 1.5A
Power Line	1.2m DC cable without core attached on adapter

Adapter 2	
Brand	APD
Model	WB-18Q12FU1
Input Power	100-240Vac, 50-60Hz, 0.6A
Output Power	12Vdc, 1.5A
Power Line	1.2m DC cable without core attached on adapter

* Adapter 1 was chosen for final test and presented in the test report.

3. The following antennas were provided to the EUT.

No.	Brand	Model	Type	Connector	Gain (dBi)	
					2.4G	5G
1	whayu	C056-511196-A	Dipole	i-pex(MHF)	4	-
2	whayu	C056-511197-A	Dipole	i-pex(MHF)	-	5
3	whayu	C056-511198-A	Dipole	i-pex(MHF)	3	4
4	whayu	C056-511198-A	Dipole	i-pex(MHF)	3	4

3.2 Description of Test Modes

For 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	48	OFDM	6.0
-	802.11a	5745-5825	149 to 165		OFDM	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	48	OFDM	6.0
-	802.11a	5745-5825	149 to 165		OFDM	6.0

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE _≥ 1G	22 deg. C, 66% RH	120Vac, 60Hz	Adair Peng
RE _{<} 1G	24 deg. C, 68% RH	120Vac, 60Hz	Adair Peng
PLC	23 deg. C, 67% RH	120Vac, 60Hz	Adair Peng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Leo Tsai

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98%, duty factor is required.

802.11a: Duty cycle = $1.389/1.477 = 0.940$, Duty factor = $10 * \log(1/0.940) = 0.27$

802.11n (HT20): Duty cycle = $1.300/1.390 = 0.935$, Duty factor = $10 * \log(1/0.935) = 0.29$

802.11n (HT40): Duty cycle = $0.645/0.709 = 0.910$, Duty factor = $10 * \log(1/0.910) = 0.41$

802.11ac (VHT80): Duty cycle = $0.034/0.090 = 0.378$, Duty factor = $10 * \log(1/0.378) = 4.23$

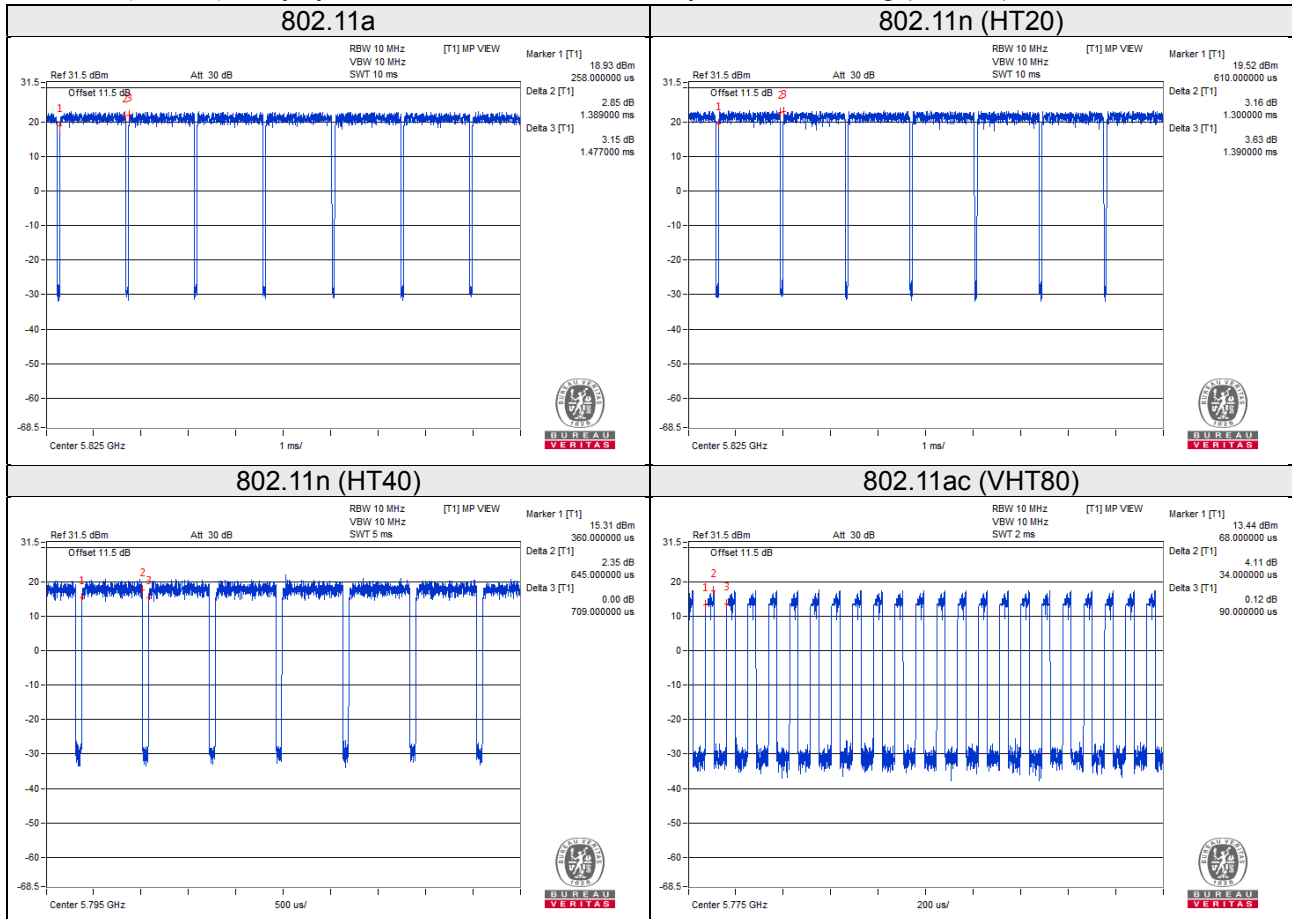

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	4	1.5	N	0	Cat5e
2.	RJ45 cable	1	6	N	0	Cat5e

3.4.1 Configuration of System under Test

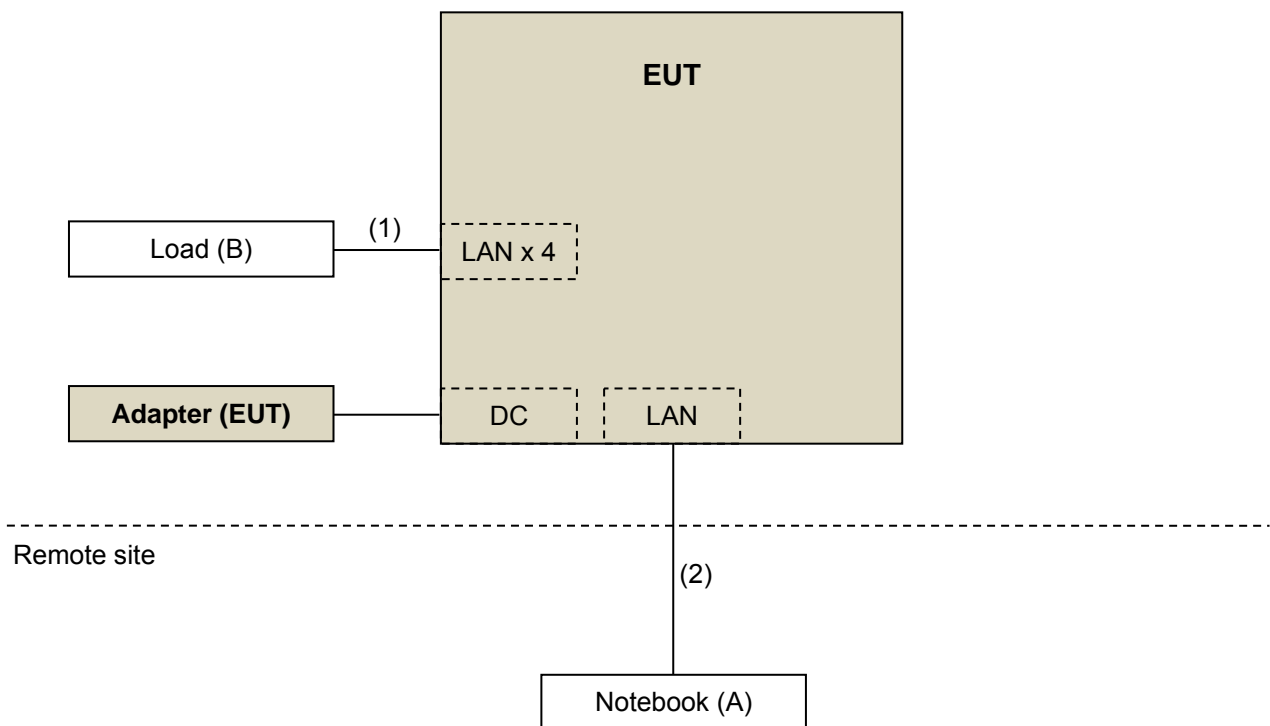

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK: 74 (dBuV/m)	AV: 54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK: 105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK: 122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 30, 2019	May 29, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 22, 2018	Nov. 21, 2019
HORN Antenna SCHWARZBECK	9120D	209	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
Loop Antenna EMCI	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2018	Aug. 20, 2019
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 27, 2019	Mar. 26, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2018	Aug. 20, 2019
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-S M-8000	Cable-CH3-03 (309224+170907)	Aug. 21, 2018	Aug. 20, 2019
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Nov. 14, 2018	Nov. 13, 2019
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY5519 0004/MY55190007/MY 55210005	Jul. 17, 2018	Jul. 16, 2019

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

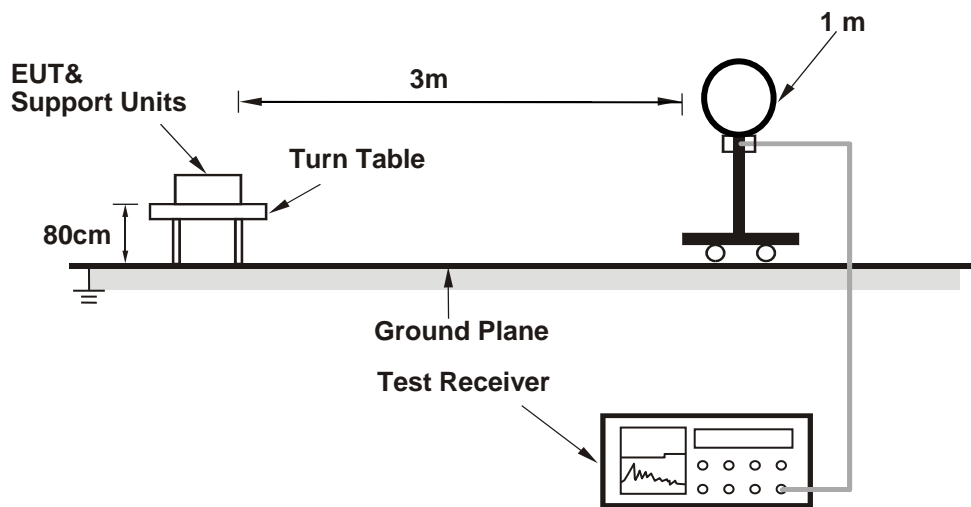

For Radiated emission 30MHz to 1GHz

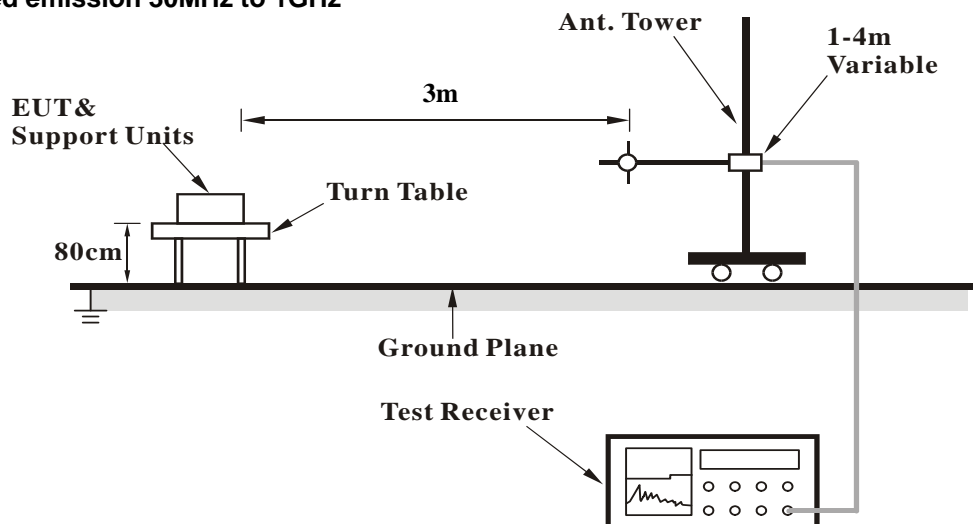

For Radiated emission above 1GHz

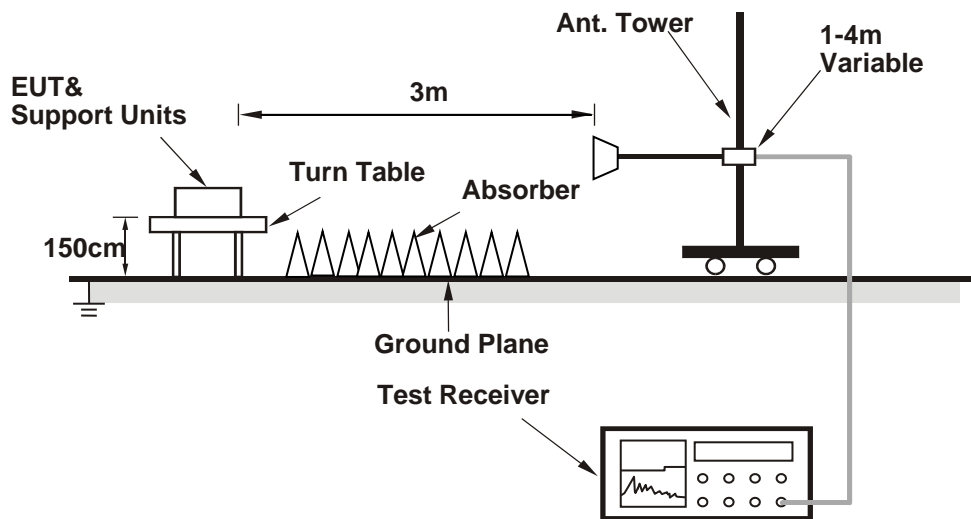

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Prepared a notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.1 PK	74.0	-11.9	1.33 H	303	57.7	4.4
2	5150.00	46.9 AV	54.0	-7.1	1.33 H	303	42.5	4.4
3	*5180.00	109.3 PK			1.21 H	299	69.8	39.5
4	*5180.00	99.4 AV			1.21 H	299	59.9	39.5
5	#10360.00	63.1 PK	68.2	-5.1	1.63 H	222	47.1	16.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.9 PK	74.0	-3.1	1.18 V	100	66.5	4.4
2	5150.00	53.4 AV	54.0	-0.6	1.18 V	100	49.0	4.4
3	*5180.00	118.0 PK			1.20 V	104	78.5	39.5
4	*5180.00	108.4 AV			1.20 V	104	68.9	39.5
5	#10360.00	65.7 PK	68.2	-2.5	2.17 V	0	49.7	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	111.0 PK			1.28 H	303	71.5	39.5
2	*5200.00	100.5 AV			1.28 H	303	61.0	39.5
3	#10400.00	65.0 PK	68.2	-13.2	1.63 H	222	48.8	16.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	119.5 PK			1.40 V	105	80.0	39.5
2	*5200.00	109.5 AV			1.40 V	105	70.0	39.5
3	#10400.00	67.7 PK	68.2	-0.5	2.14 V	357	51.5	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.5 PK			1.31 H	299	70.2	39.3
2	*5240.00	99.0 AV			1.31 H	299	59.7	39.3
3	5350.00	56.0 PK	74.0	-18.0	1.27 H	301	51.7	4.3
4	5350.00	42.6 AV	54.0	-11.4	1.27 H	301	38.3	4.3
5	#10480.00	65.5 PK	68.2	-2.7	1.55 H	221	48.5	17.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.2 PK			1.17 V	115	78.9	39.3
2	*5240.00	107.9 AV			1.17 V	115	68.6	39.3
3	5350.00	56.4 PK	74.0	-17.6	1.23 V	103	52.1	4.3
4	5350.00	43.4 AV	54.0	-10.6	1.23 V	103	39.1	4.3
5	#10480.00	68.0 PK	68.2	-0.2	2.17 V	359	51.0	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5617.31	56.3 PK	68.2	-11.9	1.71 H	308	51.7	4.6
2	*5745.00	105.6 PK			1.71 H	308	65.5	40.1
3	*5745.00	95.7 AV			1.71 H	308	55.6	40.1
4	#5987.18	57.7 PK	68.2	-10.5	1.71 H	308	52.3	5.4
5	11490.00	63.5 PK	74.0	-10.5	1.17 H	198	45.5	18.0
6	11490.00	49.5 AV	54.0	-4.5	1.17 H	198	31.5	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.64	57.4 PK	68.2	-10.8	1.70 V	190	52.9	4.5
2	*5745.00	116.8 PK			1.70 V	190	76.7	40.1
3	*5745.00	107.0 AV			1.70 V	190	66.9	40.1
4	#5984.62	59.0 PK	68.2	-9.2	1.70 V	190	53.6	5.4
5	11490.00	67.7 PK	74.0	-6.3	1.58 V	210	49.7	18.0
6	11490.00	53.6 AV	54.0	-0.4	1.58 V	210	35.6	18.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.21	55.5 PK	68.2	-12.7	1.77 H	300	50.9	4.6
2	*5785.00	107.6 PK			1.77 H	300	67.3	40.3
3	*5785.00	97.2 AV			1.77 H	300	56.9	40.3
4	#5960.26	57.8 PK	68.2	-10.4	1.77 H	300	52.5	5.3
5	11570.00	63.8 PK	74.0	-10.2	1.20 H	227	46.1	17.7
6	11570.00	49.2 AV	54.0	-4.8	1.20 H	227	31.5	17.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.97	57.0 PK	68.2	-11.2	1.69 V	190	52.4	4.6
2	*5785.00	118.8 PK			1.69 V	190	78.5	40.3
3	*5785.00	108.4 AV			1.69 V	190	68.1	40.3
4	#5980.13	58.2 PK	68.2	-10.0	1.69 V	190	52.8	5.4
5	11570.00	68.0 PK	74.0	-6.0	1.98 V	268	50.3	17.7
6	11570.00	53.6 AV	54.0	-0.4	1.98 V	268	35.9	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.64	55.0 PK	68.2	-13.2	1.68 H	299	50.4	4.6
2	*5825.00	108.3 PK			1.68 H	299	67.9	40.4
3	*5825.00	98.7 AV			1.68 H	299	58.3	40.4
4	#5963.46	57.3 PK	68.2	-10.9	1.68 H	299	52.0	5.3
5	11650.00	62.8 PK	74.0	-11.2	1.19 H	221	45.3	17.5
6	11650.00	49.2 AV	54.0	-4.8	1.19 H	221	31.7	17.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5629.49	58.0 PK	68.2	-10.2	1.64 V	188	53.5	4.5
2	*5825.00	119.4 PK			1.64 V	188	79.0	40.4
3	*5825.00	110.0 AV			1.64 V	188	69.6	40.4
4	#5998.08	59.9 PK	68.2	-8.3	1.64 V	188	54.5	5.4
5	11650.00	67.2 PK	74.0	-6.8	1.97 V	270	49.7	17.5
6	11650.00	53.5 AV	54.0	-0.5	1.97 V	270	36.0	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.2 PK	74.0	-10.8	1.33 H	303	58.8	4.4
2	5150.00	47.0 AV	54.0	-7.0	1.33 H	303	42.6	4.4
3	*5180.00	109.4 PK			1.27 H	298	69.9	39.5
4	*5180.00	98.9 AV			1.27 H	298	59.4	39.5
5	#10360.00	63.7 PK	68.2	-4.5	1.47 H	209	47.7	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.9 PK	74.0	-2.1	1.32 V	117	67.5	4.4
2	5150.00	53.5 AV	54.0	-0.5	1.32 V	117	49.1	4.4
3	*5180.00	118.0 PK			1.47 V	111	78.5	39.5
4	*5180.00	107.7 AV			1.47 V	111	68.2	39.5
5	#10360.00	66.1 PK	68.2	-2.1	2.15 V	1	50.1	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.6 PK			1.35 H	289	70.1	39.5
2	*5200.00	99.5 AV			1.35 H	289	60.0	39.5
3	#10400.00	64.7 PK	68.2	-3.5	1.64 H	219	48.5	16.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	118.2 PK			1.35 V	115	78.7	39.5
2	*5200.00	108.3 AV			1.35 V	115	68.8	39.5
3	#10400.00	67.5 PK	68.2	-0.7	2.15 V	358	51.3	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.8 PK			1.24 H	297	69.5	39.3
2	*5240.00	98.3 AV			1.24 H	297	59.0	39.3
3	5350.00	56.5 PK	74.0	-17.5	1.30 H	305	52.2	4.3
4	5350.00	43.5 AV	54.0	-10.5	1.30 H	305	39.2	4.3
5	#10480.00	65.1 PK	68.2	-3.1	1.57 H	215	48.1	17.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.5 PK			1.31 V	109	78.2	39.3
2	*5240.00	107.3 AV			1.31 V	109	68.0	39.3
3	5350.00	56.8 PK	74.0	-17.2	1.30 V	101	52.5	4.3
4	5350.00	43.8 AV	54.0	-10.2	1.30 V	101	39.5	4.3
5	#10480.00	67.7 PK	68.2	-0.5	2.27 V	359	50.7	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.77	55.4 PK	68.2	-12.8	1.66 H	303	50.9	4.5
2	*5745.00	104.1 PK			1.66 H	303	64.0	40.1
3	*5745.00	94.3 AV			1.66 H	303	54.2	40.1
4	#5942.95	57.8 PK	68.2	-10.4	1.66 H	303	52.5	5.3
5	11490.00	63.3 PK	74.0	-10.7	1.30 H	219	45.3	18.0
6	11490.00	49.1 AV	54.0	-4.9	1.30 H	219	31.1	18.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.67	56.2 PK	68.2	-12.0	1.89 V	194	51.6	4.6
2	*5745.00	115.1 PK			1.89 V	194	75.0	40.1
3	*5745.00	105.6 AV			1.89 V	194	65.5	40.1
4	#5926.92	57.6 PK	68.2	-10.6	1.89 V	194	52.3	5.3
5	11490.00	67.7 PK	74.0	-6.3	1.98 V	269	49.7	18.0
6	11490.00	53.5 AV	54.0	-0.5	1.98 V	269	35.5	18.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.21	55.3 PK	68.2	-12.9	1.67 H	311	50.7	4.6
2	*5785.00	106.1 PK			1.67 H	311	65.8	40.3
3	*5785.00	95.7 AV			1.67 H	311	55.4	40.3
4	#5924.36	57.1 PK	68.7	-11.6	1.67 H	311	51.8	5.3
5	11570.00	63.2 PK	74.0	-10.8	1.15 H	225	45.5	17.7
6	11570.00	49.0 AV	54.0	-5.0	1.15 H	225	31.3	17.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.31	56.1 PK	68.2	-12.1	1.75 V	186	51.6	4.5
2	*5785.00	117.3 PK			1.75 V	186	77.0	40.3
3	*5785.00	107.1 AV			1.75 V	186	66.8	40.3
4	#5987.18	58.2 PK	68.2	-10.0	1.75 V	186	52.8	5.4
5	11570.00	67.2 PK	74.0	-6.8	1.99 V	268	49.5	17.7
6	11570.00	53.3 AV	54.0	-0.7	1.99 V	268	35.6	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5614.10	56.4 PK	68.2	-11.8	1.75 H	304	51.8	4.6
2	*5825.00	106.9 PK			1.75 H	304	66.5	40.4
3	*5825.00	97.5 AV			1.75 H	304	57.1	40.4
4	#5930.13	58.6 PK	68.2	-9.6	1.75 H	304	53.3	5.3
5	11650.00	63.4 PK	74.0	-10.6	1.22 H	222	45.9	17.5
6	11650.00	48.7 AV	54.0	-5.3	1.22 H	222	31.2	17.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5623.72	57.2 PK	68.2	-11.0	1.87 V	194	52.7	4.5
2	*5825.00	118.2 PK			1.87 V	194	77.8	40.4
3	*5825.00	108.9 AV			1.87 V	194	68.5	40.4
4	#5929.49	58.3 PK	68.2	-9.9	1.87 V	194	53.0	5.3
5	11650.00	67.8 PK	74.0	-6.2	2.01 V	267	50.3	17.5
6	11650.00	53.2 AV	54.0	-0.8	2.01 V	267	35.7	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.37 H	289	54.4	4.4
2	5150.00	46.9 AV	54.0	-7.1	1.37 H	289	42.5	4.4
3	*5190.00	104.6 PK			1.27 H	297	65.1	39.5
4	*5190.00	95.4 AV			1.27 H	297	55.9	39.5
5	#10380.00	59.5 PK	68.2	-8.7	1.69 H	209	43.3	16.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.15 V	136	62.9	4.4
2	5150.00	53.3 AV	54.0	-0.7	1.15 V	136	48.9	4.4
3	*5190.00	113.2 PK			1.37 V	114	73.7	39.5
4	*5190.00	104.3 AV			1.37 V	114	64.8	39.5
5	#10380.00	62.1 PK	68.2	-6.1	2.21 V	1	45.9	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.30 H	299	54.4	4.4
2	5150.00	47.0 AV	54.0	-7.0	1.30 H	299	42.6	4.4
3	*5230.00	107.0 PK			1.23 H	301	67.7	39.3
4	*5230.00	97.5 AV			1.23 H	301	58.2	39.3
5	#10460.00	64.5 PK	68.2	-3.7	1.59 H	219	47.7	16.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.43 V	108	62.9	4.4
2	5150.00	53.3 AV	54.0	-0.7	1.43 V	108	48.9	4.4
3	*5230.00	115.5 PK			1.61 V	102	76.2	39.3
4	*5230.00	106.4 AV			1.61 V	102	67.1	39.3
5	#10460.00	67.1 PK	68.2	-1.1	2.24 V	358	50.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.64	55.6 PK	68.2	-12.6	1.67 H	298	51.0	4.6
2	*5755.00	103.1 PK			1.67 H	298	63.0	40.1
3	*5755.00	94.0 AV			1.67 H	298	53.9	40.1
4	#5981.41	58.0 PK	68.2	-10.2	1.67 H	298	52.6	5.4
5	11510.00	63.2 PK	74.0	-10.8	1.27 H	227	45.1	18.1
6	11510.00	49.4 AV	54.0	-4.6	1.27 H	227	31.3	18.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.28	56.5 PK	68.2	-11.7	1.79 V	186	51.9	4.6
2	*5755.00	114.3 PK			1.79 V	186	74.2	40.1
3	*5755.00	105.1 AV			1.79 V	186	65.0	40.1
4	#5954.49	57.8 PK	68.2	-10.4	1.79 V	186	52.5	5.3
5	11510.00	67.3 PK	74.0	-6.7	2.00 V	268	49.2	18.1
6	11510.00	53.6 AV	54.0	-0.4	2.00 V	268	35.5	18.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5609.62	55.9 PK	68.2	-12.3	1.55 H	297	51.3	4.6
2	*5795.00	104.1 PK			1.55 H	297	63.7	40.4
3	*5795.00	95.2 AV			1.55 H	297	54.8	40.4
4	#5945.51	58.5 PK	68.2	-9.7	1.55 H	297	53.2	5.3
5	11590.00	61.7 PK	74.0	-12.3	1.21 H	221	44.1	17.6
6	11590.00	49.5 AV	54.0	-4.5	1.21 H	221	31.9	17.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.90	56.4 PK	68.2	-11.8	1.80 V	168	51.8	4.6
2	*5795.00	115.3 PK			1.80 V	168	74.9	40.4
3	*5795.00	106.4 AV			1.80 V	168	66.0	40.4
4	#5951.92	57.6 PK	68.2	-10.6	1.80 V	168	52.3	5.3
5	11590.00	66.1 PK	74.0	-7.9	2.00 V	270	48.5	17.6
6	11590.00	53.6 AV	54.0	-0.4	2.00 V	270	36.0	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.20 H	298	53.1	4.4
2	5150.00	46.7 AV	54.0	-7.3	1.20 H	298	42.3	4.4
3	*5210.00	99.1 PK			1.31 H	309	59.7	39.4
4	*5210.00	89.8 AV			1.31 H	309	50.4	39.4
5	5350.00	56.6 PK	74.0	-17.4	1.27 H	303	52.3	4.3
6	5350.00	43.4 AV	54.0	-10.6	1.27 H	303	39.1	4.3
7	#10420.00	56.6 PK	68.2	-11.6	1.75 H	239	40.1	16.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	1.22 V	114	61.1	4.4
2	5150.00	53.3 AV	54.0	-0.7	1.22 V	114	48.9	4.4
3	*5210.00	107.9 PK			1.52 V	110	68.5	39.4
4	*5210.00	98.6 AV			1.52 V	110	59.2	39.4
5	5350.00	57.6 PK	74.0	-16.4	1.29 V	103	53.3	4.3
6	5350.00	44.2 AV	54.0	-9.8	1.29 V	103	39.9	4.3
7	#10420.00	59.0 PK	68.2	-9.2	2.22 V	2	42.5	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.23	58.3 PK	68.2	-9.9	1.70 H	301	53.8	4.5
2	#5650.00	61.6 PK	68.2	-6.6	1.63 H	289	57.1	4.5
3	*5775.00	103.6 PK			1.70 H	301	63.3	40.3
4	*5775.00	94.1 AV			1.70 H	301	53.8	40.3
5	#5925.00	58.2 PK	68.2	-10.0	1.67 H	309	52.9	5.3
6	#5957.69	58.6 PK	68.2	-9.6	1.70 H	301	53.3	5.3
7	11550.00	63.0 PK	74.0	-11.0	1.19 H	217	45.1	17.9
8	11550.00	49.0 AV	54.0	-5.0	1.19 H	217	31.1	17.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	67.5 PK	68.2	-0.7	1.86 V	160	63.0	4.5
2	#5650.00	66.9 PK	68.2	-1.3	1.66 V	187	62.4	4.5
3	*5775.00	113.6 PK			1.66 V	187	73.3	40.3
4	*5775.00	104.3 AV			1.66 V	187	64.0	40.3
5	#5925.00	65.2 PK	68.2	-3.0	1.90 V	171	59.9	5.3
6	#5929.49	61.5 PK	68.2	-6.7	1.66 V	187	56.2	5.3
7	11550.00	67.3 PK	74.0	-6.7	2.00 V	270	49.4	17.9
8	11550.00	53.2 AV	54.0	-0.8	2.00 V	270	35.3	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data:


802.11a

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.84	28.3 QP	40.0	-11.7	1.00 H	180	39.4	-11.1
2	134.89	33.6 QP	43.5	-9.9	2.00 H	233	43.7	-10.1
3	173.78	35.0 QP	43.5	-8.5	1.51 H	81	44.7	-9.7
4	249.60	39.4 QP	46.0	-6.6	1.00 H	81	48.5	-9.1
5	339.04	31.5 QP	46.0	-14.5	1.00 H	347	38.3	-6.8
6	500.42	32.3 QP	46.0	-13.7	2.00 H	34	35.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

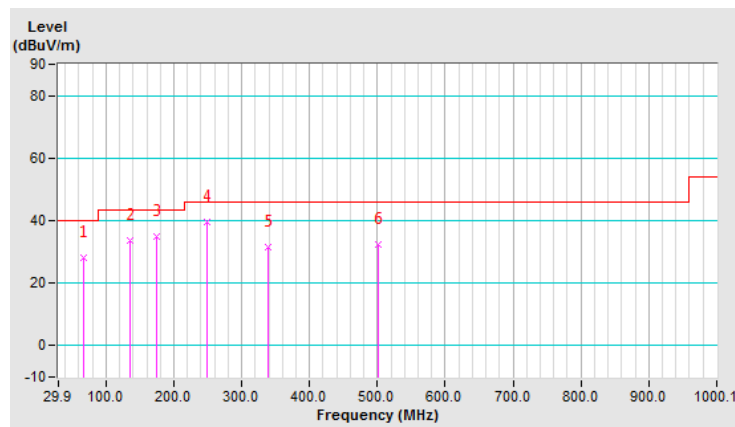


CHANNEL	TX Channel 48	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.20	35.3 QP	40.0	-4.7	1.00 V	24	44.9	-9.6
2	68.96	32.1 QP	40.0	-7.9	1.00 V	0	43.9	-11.8
3	125.17	36.2 QP	43.5	-7.3	1.50 V	222	47.2	-11.0
4	158.22	32.3 QP	43.5	-11.2	2.00 V	113	41.4	-9.1
5	249.60	33.3 QP	46.0	-12.7	1.00 V	175	42.4	-9.1
6	500.42	31.6 QP	46.0	-14.4	1.50 V	55	35.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

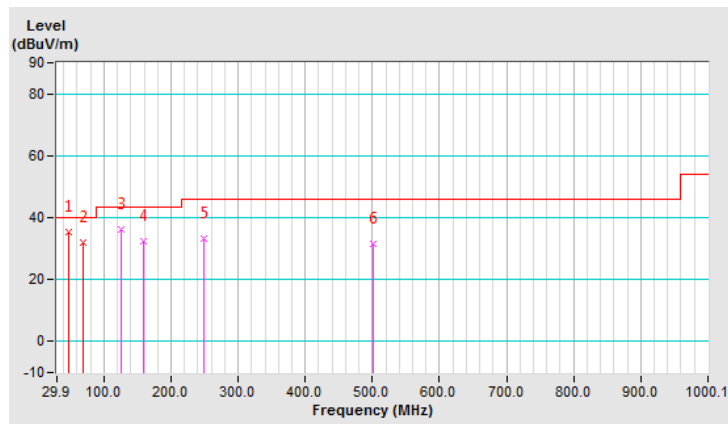

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 19, 2018	Aug. 18, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

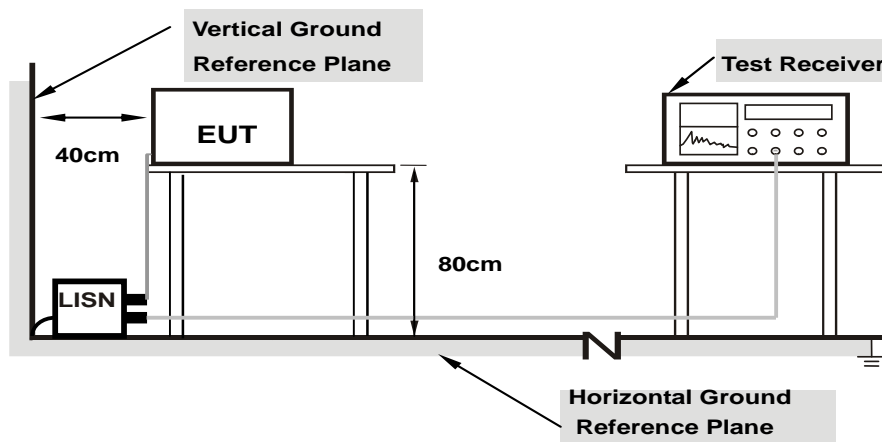

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Worst-case data:


802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15719	9.69	40.99	24.81	50.68	34.50	65.61
2	0.50507	9.68	27.76	16.88	37.44	26.56	56.00	46.00	-18.56	-19.44
3	0.60737	9.68	18.99	6.88	28.67	16.56	56.00	46.00	-27.33	-29.44
4	0.88899	9.67	19.83	7.70	29.50	17.37	56.00	46.00	-26.50	-28.63
5	2.67586	9.72	12.10	1.13	21.82	10.85	56.00	46.00	-34.18	-35.15
6	3.71983	9.74	16.53	2.15	26.27	11.89	56.00	46.00	-29.73	-34.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

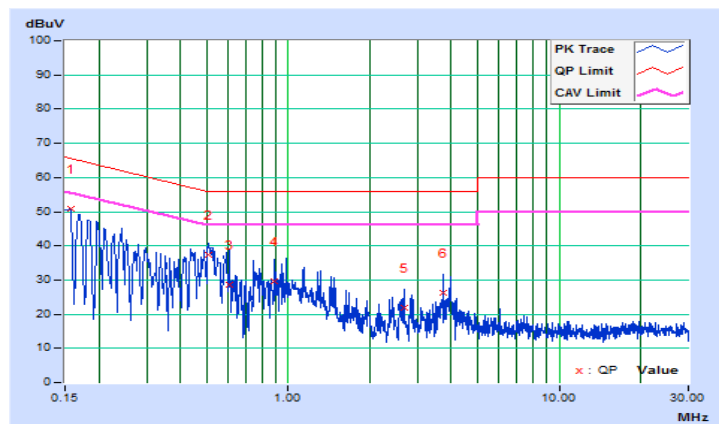


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.16526	9.66	42.42	24.91	52.08	34.57	65.20	55.20	-13.12
2	0.24775	9.66	32.89	15.97	42.55	25.63	61.83	51.83	-19.28	-26.20
3	0.44325	9.65	26.06	11.88	35.71	21.53	57.00	47.00	-21.29	-25.47
4	0.52927	9.65	22.17	13.25	31.82	22.90	56.00	46.00	-24.18	-23.10
5	1.29954	9.65	13.34	1.90	22.99	11.55	56.00	46.00	-33.01	-34.45
6	3.91924	9.72	15.46	2.33	25.18	12.05	56.00	46.00	-30.82	-33.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

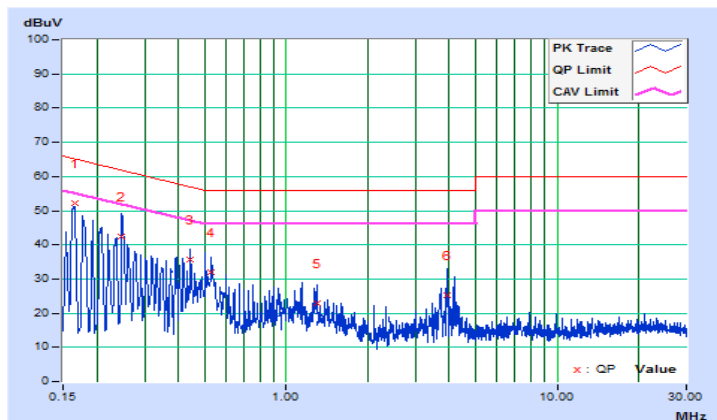

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	19.83	19.21	18.81	255.562	24.07	30.00	Pass
40	5200	20.54	20.35	20.15	325.147	25.12	30.00	Pass
48	5240	18.56	18.64	17.82	205.427	23.13	30.00	Pass
149	5745	16.85	17.54	16.47	149.532	21.75	30.00	Pass
157	5785	17.06	17.68	16.75	156.745	21.95	30.00	Pass
165	5825	18.32	18.39	17.93	199.031	22.99	30.00	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	19.46	19.11	18.57	241.723	23.83	30.00	Pass
40	5200	20.25	20.11	19.67	301.173	24.79	30.00	Pass
48	5240	19.33	19.82	18.95	260.168	24.15	30.00	Pass
149	5745	16.69	17.46	16.41	146.137	21.65	30.00	Pass
157	5785	16.85	17.82	16.81	156.924	21.96	30.00	Pass
165	5825	18.67	18.95	18.18	217.911	23.38	30.00	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	18.12	18.91	17.66	201.012	23.03	30.00	Pass
46	5230	20.82	20.91	20.03	344.784	25.38	30.00	Pass
151	5755	17.92	18.77	17.67	195.759	22.92	30.00	Pass
159	5795	18.22	18.82	17.87	203.817	23.09	30.00	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	14.88	14.82	14.46	89.025	19.50	30.00	Pass
155	5775	19.71	20.33	19.28	286.159	24.57	30.00	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	19.46	19.11	18.57	241.723	23.83	26.23	Pass
40	5200	20.25	20.11	19.67	301.173	24.79	26.23	Pass
48	5240	19.33	19.82	18.95	260.168	24.15	26.23	Pass
149	5745	16.69	17.46	16.41	146.137	21.65	26.23	Pass
157	5785	16.85	17.82	16.81	156.924	21.96	26.23	Pass
165	5825	18.67	18.95	18.18	217.911	23.38	26.23	Pass

Note:

1. 5180-5240MHz: Directional gain = 5dBi + 10log(3) = 9.77dBi > 6dBi so the power limit shall be reduced to 30 - (9.77 - 6) = 26.23dBi.
2. 5745-5825MHz: Directional gain = 5dBi + 10log(3) = 9.77dBi > 6dBi so the power limit shall be reduced to 30 - (9.77 - 6) = 26.23dBi.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	18.12	18.91	17.66	201.012	23.03	26.23	Pass
46	5230	20.82	20.91	20.03	344.784	25.38	26.23	Pass
151	5755	17.92	18.77	17.67	195.759	22.92	26.23	Pass
159	5795	18.22	18.82	17.87	203.817	23.09	26.23	Pass

Note:

Note:

1. 5180-5240MHz: Directional gain = 5dBi + 10log(3) = 9.77dBi > 6dBi so the power limit shall be reduced to 30 - (9.77 - 6) = 26.23dBi.
2. 5745-5825MHz: Directional gain = 5dBi + 10log(3) = 9.77dBi > 6dBi so the power limit shall be reduced to 30 - (9.77 - 6) = 26.23dBi.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	14.88	14.82	14.46	89.025	19.50	26.23	Pass
155	5775	19.71	20.33	19.28	286.159	24.57	26.23	Pass


Note:

Note:

1. 5180-5240MHz: Directional gain = 5dBi + 10log(3) = 9.77dBi > 6dBi so the power limit shall be reduced to 30 - (9.77 - 6) = 26.23dBi.
2. 5745-5825MHz: Directional gain = 5dBi + 10log(3) = 9.77dBi > 6dBi so the power limit shall be reduced to 30 - (9.77 - 6) = 26.23dBi.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
36	5180	16.61	16.52	16.52
40	5200	16.80	16.68	16.56
48	5240	16.68	16.56	16.44
149	5745	16.68	16.56	16.44
157	5785	16.68	16.68	16.44
165	5825	16.68	16.56	16.44

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
36	5180	17.76	17.56	17.64
40	5200	17.76	17.64	17.76
48	5240	17.76	17.64	17.76
149	5745	17.76	17.64	17.64
157	5785	17.64	17.64	17.64
165	5825	17.76	17.52	17.64

802.11n (HT40)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
38	5190	36.12	36.48	36.24
46	5230	36.36	36.60	36.48
151	5755	36.24	36.48	36.24
159	5795	36.12	36.48	36.24

802.11ac (VHT80)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
42	5210	75.60	75.36	75.12
155	5775	75.36	75.36	75.36

Spectrum Plot of Worst Value


802.11a

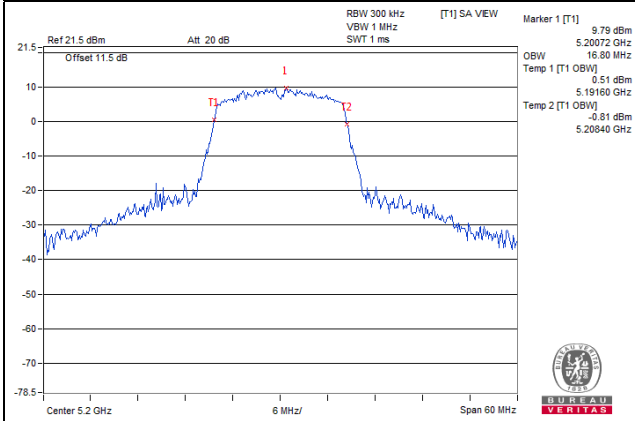


802.11n (HT20)

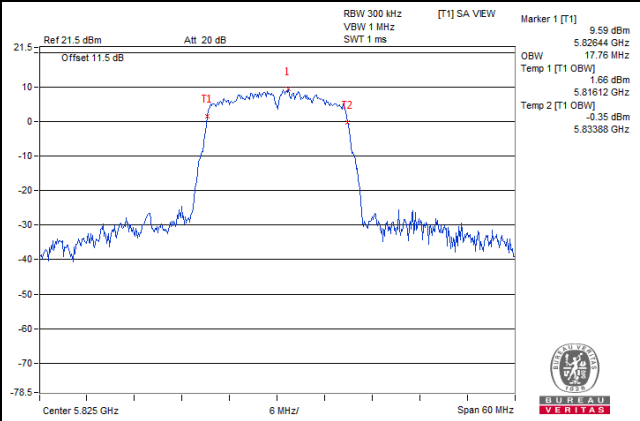

802.11n (HT40)

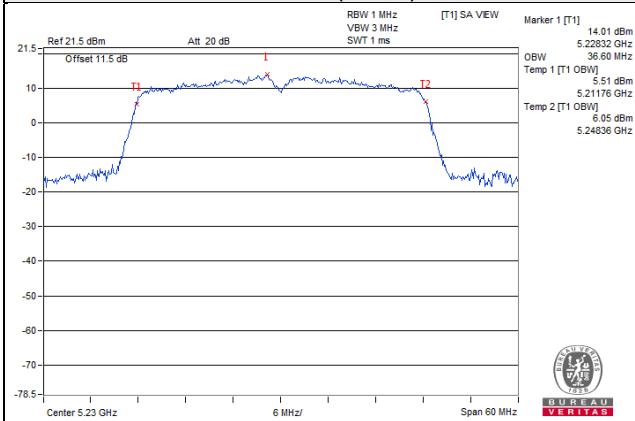

802.11ac (VHT80)

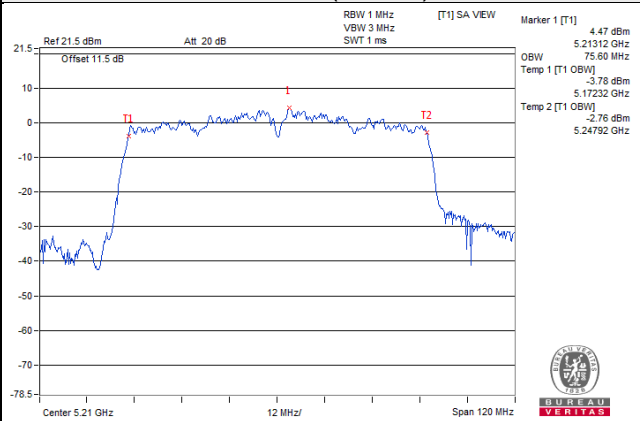


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup

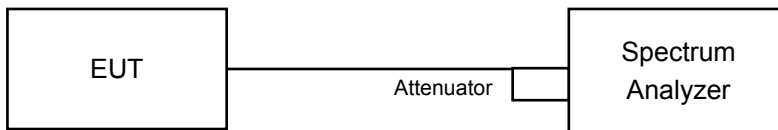

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-1 band:

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1MHz, Set VBW \geq 3 MHz, Detector = RMS
- Set Channel power measure = 1MHz
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3 band:

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz} / 300 \text{ kHz})$
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-1 band:

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	5.76	5.49	5.16	0.27	10.52	13.23	Pass
40	5200	6.59	6.42	6.15	0.27	11.43	13.23	Pass
48	5240	4.74	4.92	4.33	0.27	9.71	13.23	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (9.77 - 6) = 13.23\text{dBi}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	4.80	4.61	4.53	0.29	9.71	13.23	Pass
40	5200	5.35	5.68	5.60	0.29	10.61	13.23	Pass
48	5240	3.54	5.93	5.36	0.29	10.12	13.23	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (9.77 - 6) = 13.23\text{dBi}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	0.69	0.17	0.38	0.41	5.60	13.23	Pass
46	5230	3.30	3.16	2.99	0.41	8.33	13.23	Pass

Note:


- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (9.77 - 6) = 13.23\text{dBi}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	-7.45	-7.98	-7.44	4.23	1.39	13.23	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 5dBi + 10log(3) = 9.77dBi > 6dBi, so the power density limit shall be reduced to 17 - (9.77 - 6) = 13.23dBi.
- Refer to section 3.3 for duty cycle spectrum plot.

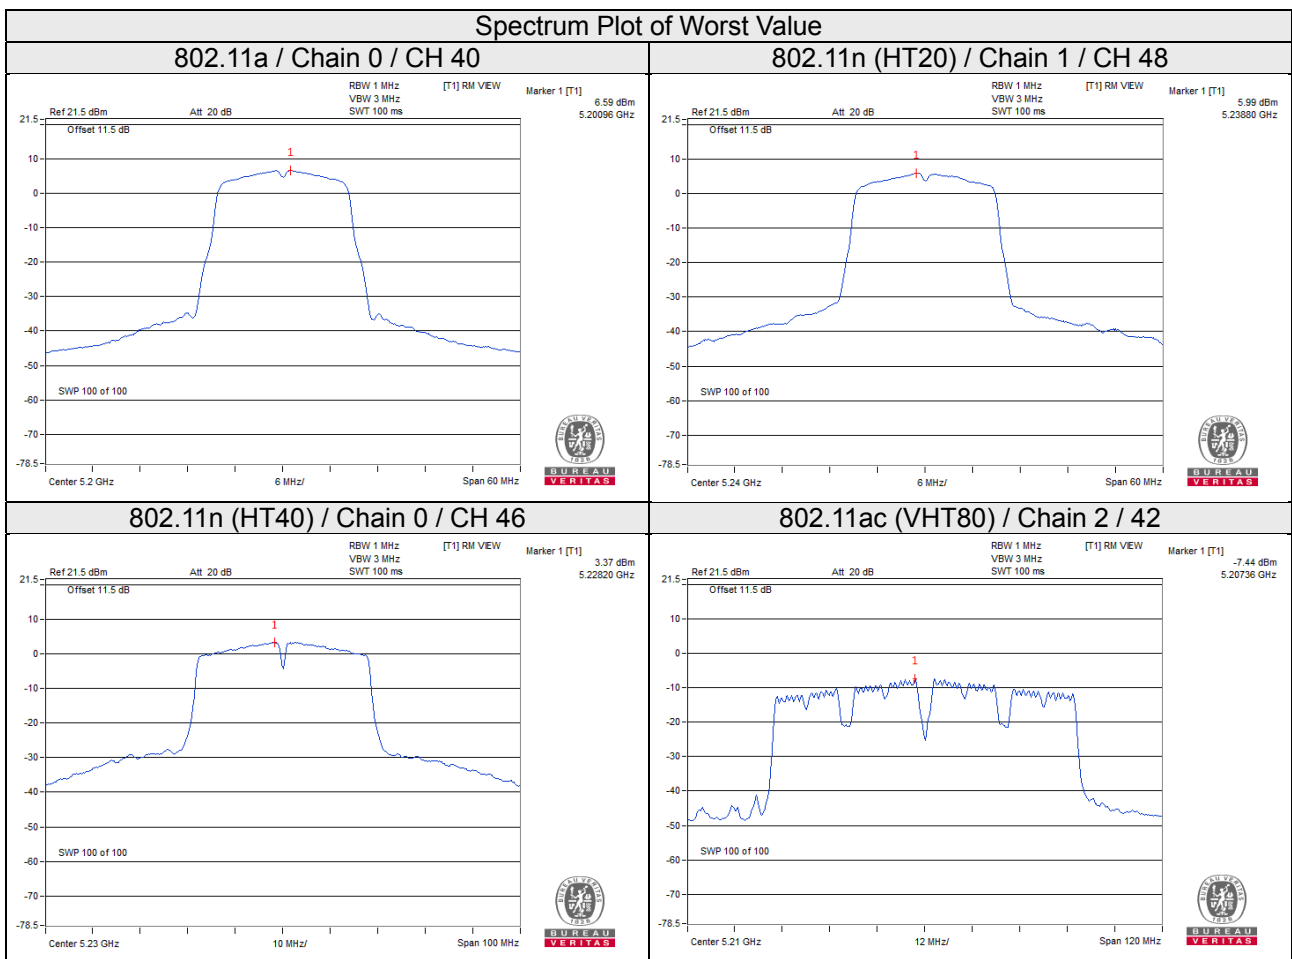

For U-NII-3 band:

802.11a

TX chain	Chan.	Freq. (MHz)	PSD w/o Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD with Duty Factor (dBm/500kHz)	Limit (dBm/500 kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	149	5745	-4.64	-2.42	4.77	0.27	2.62	26.23	Pass
	157	5785	-4.14	-1.92	4.77	0.27	3.12	26.23	Pass
	165	5825	-3.02	-0.80	4.77	0.27	4.24	26.23	Pass
1	149	5745	-4.67	-2.45	4.77	0.27	2.59	26.23	Pass
	157	5785	-4.27	-2.05	4.77	0.27	2.99	26.23	Pass
	165	5825	-2.92	-0.70	4.77	0.27	4.34	26.23	Pass
2	149	5745	-5.35	-3.13	4.77	0.27	1.91	26.23	Pass
	157	5785	-4.37	-2.15	4.77	0.27	2.89	26.23	Pass
	165	5825	-4.94	-2.72	4.77	0.27	2.32	26.23	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
- 5Directional gain = $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$ so the power density limit shall be reduced to $30 - (9.77 - 6) = 26.23\text{dBi}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD w/o Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD with Duty Factor (dBm/500kHz)	Limit (dBm/500 kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	149	5745	-4.83	-2.61	4.77	0.29	2.45	26.23	Pass
	157	5785	-4.41	-2.19	4.77	0.29	2.87	26.23	Pass
	165	5825	-2.72	-0.50	4.77	0.29	4.56	26.23	Pass
1	149	5745	-4.46	-2.24	4.77	0.29	2.82	26.23	Pass
	157	5785	-3.95	-1.73	4.77	0.29	3.33	26.23	Pass
	165	5825	-2.48	-0.26	4.77	0.29	4.80	26.23	Pass
2	149	5745	-4.89	-2.67	4.77	0.29	2.39	26.23	Pass
	157	5785	-4.69	-2.47	4.77	0.29	2.59	26.23	Pass
	165	5825	-2.83	-0.61	4.77	0.29	4.45	26.23	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
- 5Directional gain = $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$ so the power density limit shall be reduced to $30 - (9.77 - 6) = 26.23\text{dBi}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD w/o Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD with Duty Factor (dBm/500kHz)	Limit (dBm/500 kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	151	5755	-7.44	-5.22	4.77	0.41	-0.04	26.23	Pass
	159	5795	-6.95	-4.73	4.77	0.41	0.45	26.23	Pass
1	151	5755	-7.39	-5.17	4.77	0.41	0.01	26.23	Pass
	159	5795	-6.82	-4.60	4.77	0.41	0.58	26.23	Pass
2	151	5755	-7.87	-5.65	4.77	0.41	-0.47	26.23	Pass
	159	5795	-7.24	-5.02	4.77	0.41	0.16	26.23	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
2. 5Directional gain = 5dBi + $10 \log(3) = 9.77\text{dBi} > 6\text{dBi}$ so the power density limit shall be reduced to $30 - (9.77 - 6) = 26.23\text{dBi}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


TX chain	Chan.	Freq. (MHz)	PSD w/o Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD with Duty Factor (dBm/500kHz)	Limit (dBm/500 kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-7.75	-5.53	4.77	4.23	3.47	26.23	Pass
1	155	5775	-7.84	-5.62	4.77	4.23	3.38	26.23	Pass
2	155	5775	-8.44	-6.22	4.77	4.23	2.78	26.23	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
2. 5Directional gain = 5dBi + $10 \log(3) = 9.77\text{dBi} > 6\text{dBi}$ so the power density limit shall be reduced to $30 - (9.77 - 6) = 26.23\text{dBi}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a

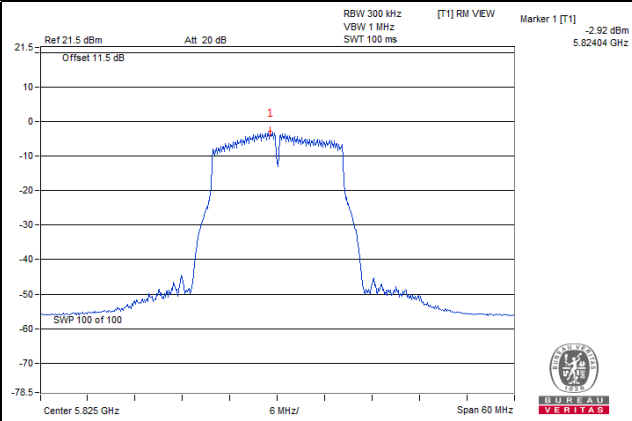


802.11n (HT20)

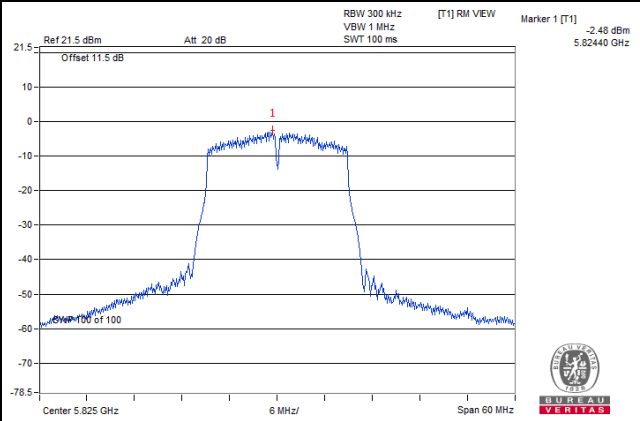

802.11n (HT40)

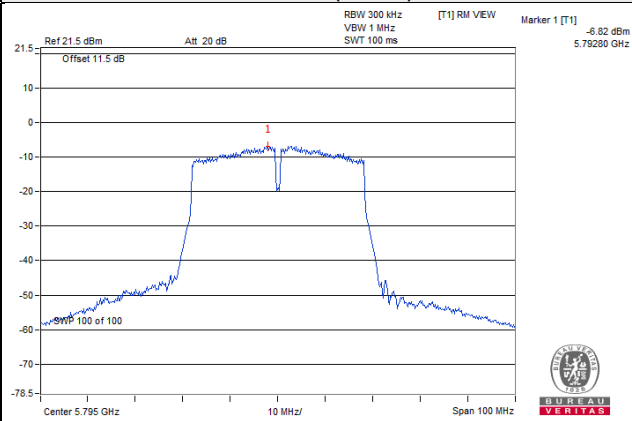

802.11ac (VHT80)

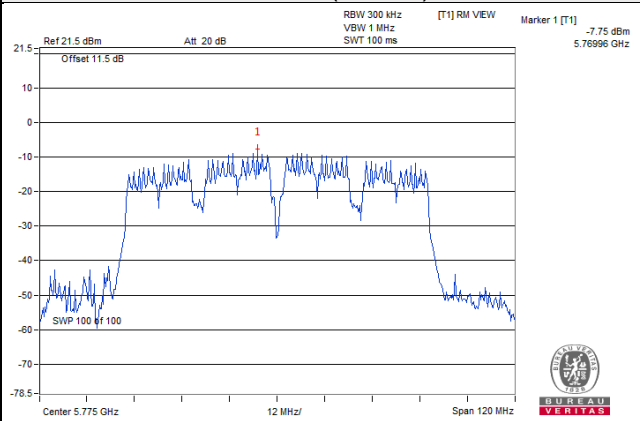


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

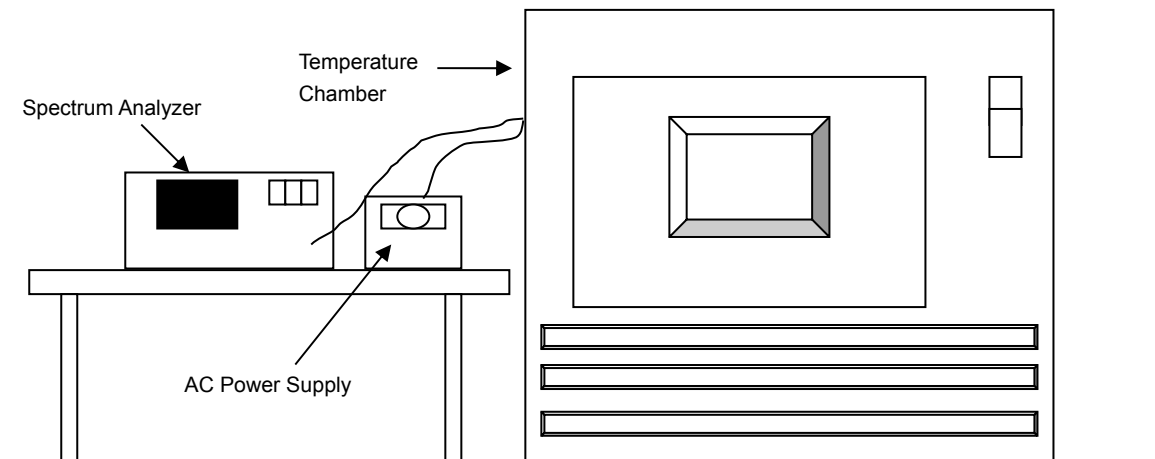

4.6.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2019	Jun. 11, 2020
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 03, 2019	Jun. 02, 2020
Digital Multimeter Fluke	87-III	70360742	Jun. 29, 2018	Jun. 28, 2019
DC Power Supply Topward	6603D	700637	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step c and d with every 10 degrees reduction until the lowest temperature achieved.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
40	120	5179.9822	Pass	5179.9828	Pass	5179.9835	Pass	5179.9828	Pass
30	120	5179.9726	Pass	5179.9756	Pass	5179.9739	Pass	5179.9723	Pass
20	120	5179.9797	Pass	5179.9795	Pass	5179.9796	Pass	5179.9819	Pass
10	120	5179.9766	Pass	5179.9796	Pass	5179.9788	Pass	5179.9798	Pass
0	120	5180.0056	Pass	5180.0094	Pass	5180.0086	Pass	5180.0089	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
20	138	5179.9801	Pass	5179.9805	Pass	5179.9803	Pass	5179.9824	Pass
	120	5179.9797	Pass	5179.9795	Pass	5179.9796	Pass	5179.9819	Pass
	102	5179.9804	Pass	5179.9791	Pass	5179.9786	Pass	5179.9817	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup

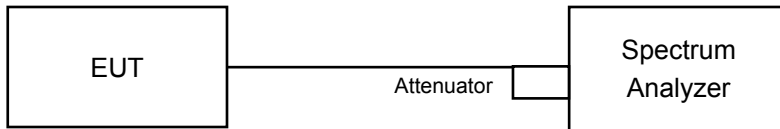

4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	15.17	15.19	15.20	0.5	Pass
157	5785	15.18	15.48	15.16	0.5	Pass
165	5825	15.19	15.17	15.20	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	15.18	15.77	15.17	0.5	Pass
157	5785	15.15	15.75	15.18	0.5	Pass
165	5825	15.16	16.35	15.19	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
151	5755	35.27	35.24	35.28	0.5	Pass
159	5795	35.25	35.27	35.26	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
155	5775	75.26	74.07	72.85	0.5	Pass

Spectrum Plot of Worst Value


802.11a

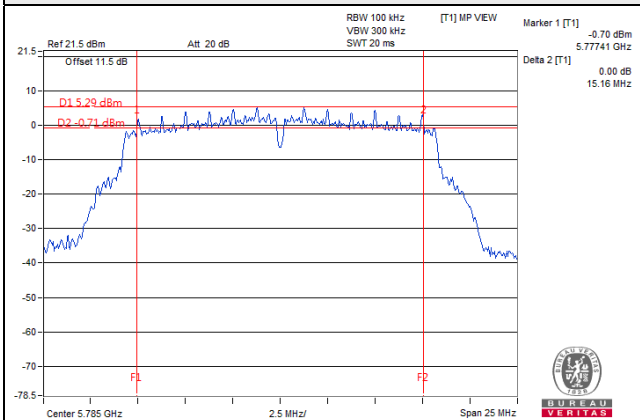


802.11n (HT20)

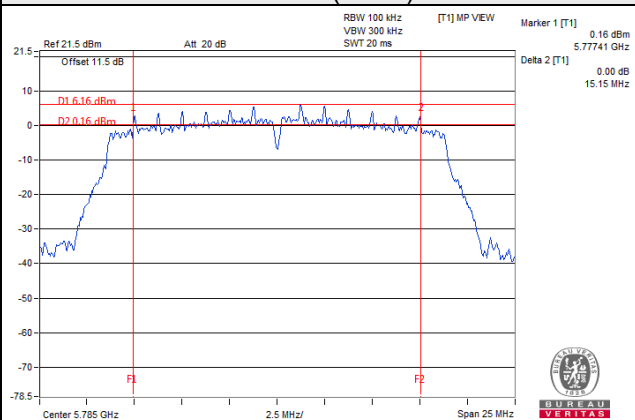

802.11n (HT40)

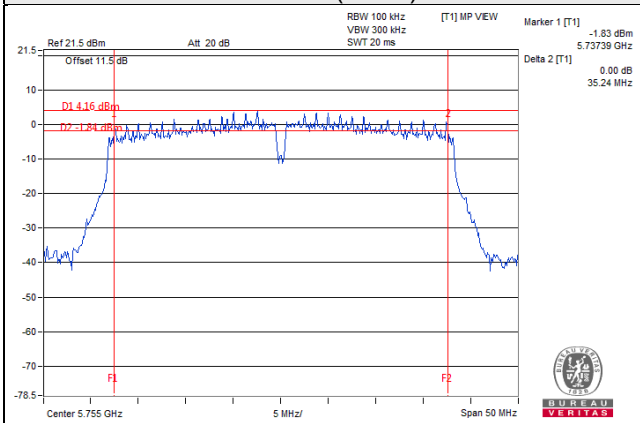

802.11ac (VHT80)

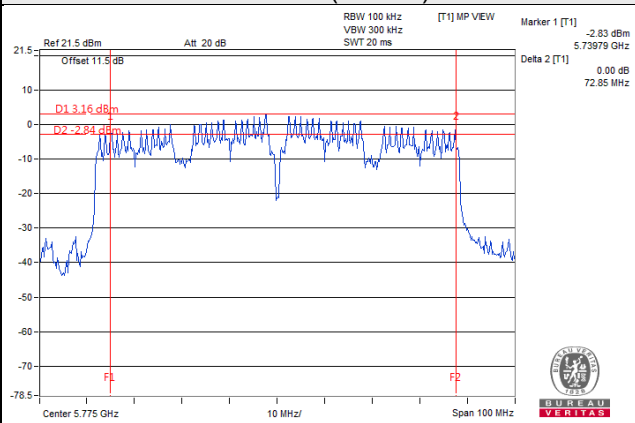


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

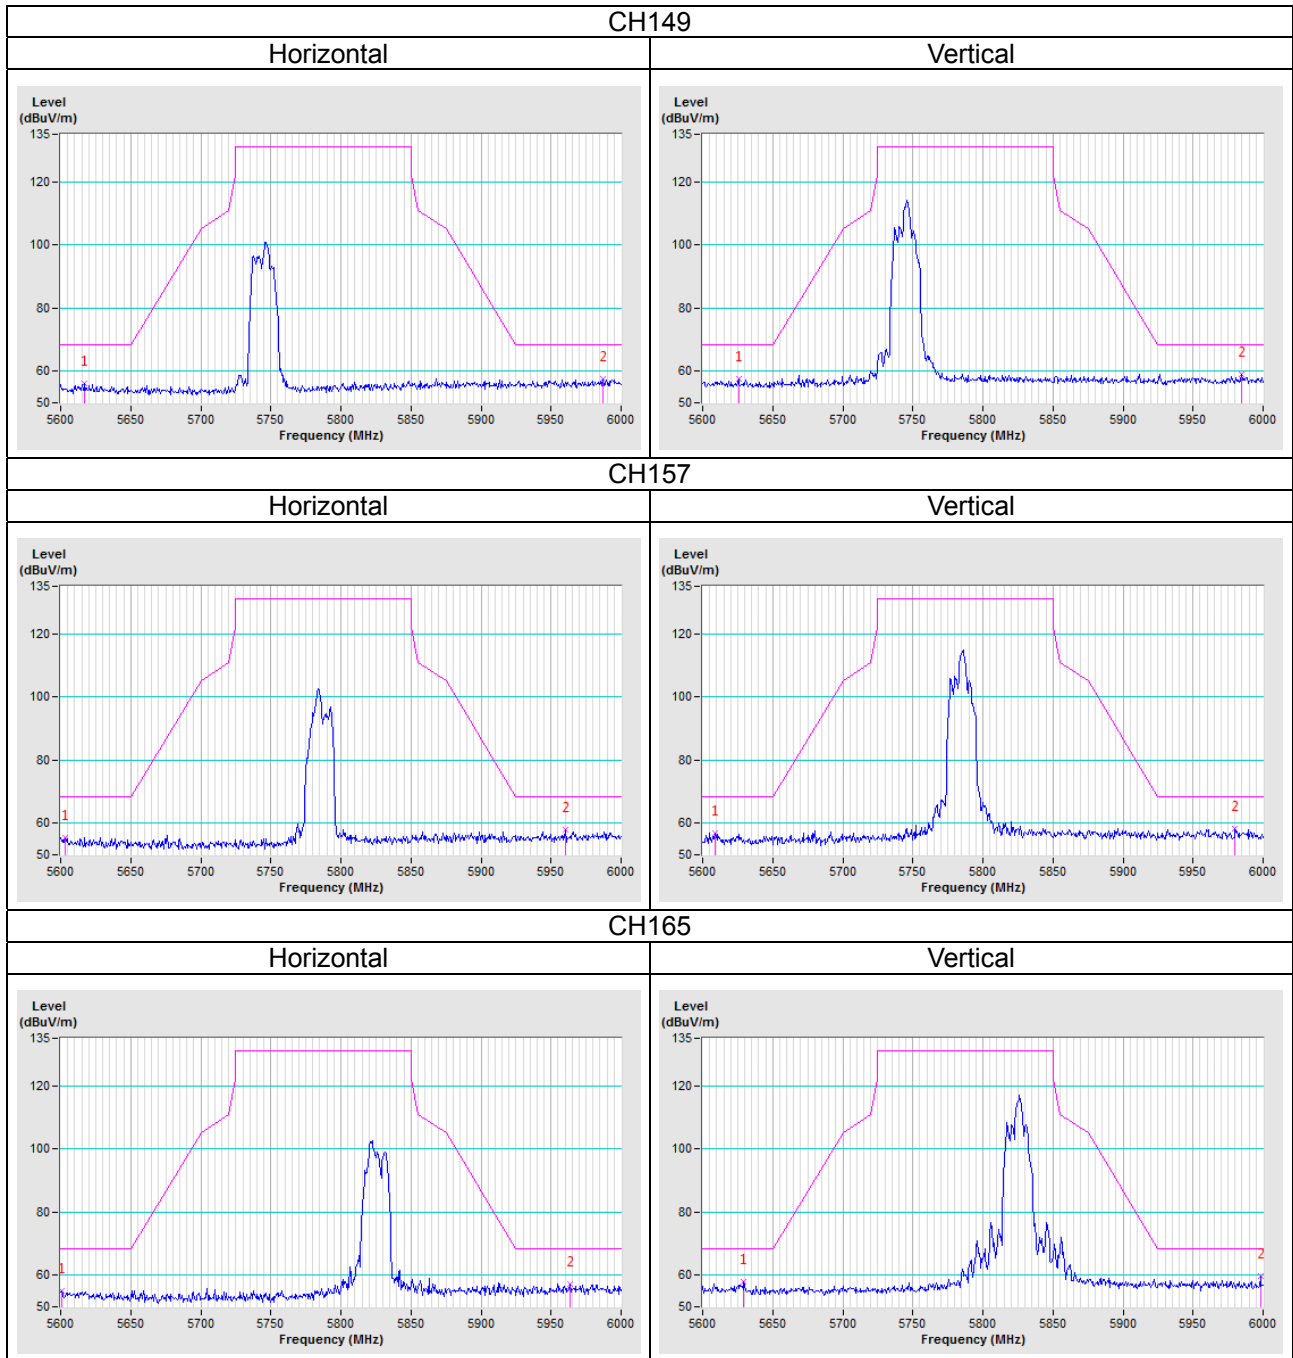


802.11n (HT20)

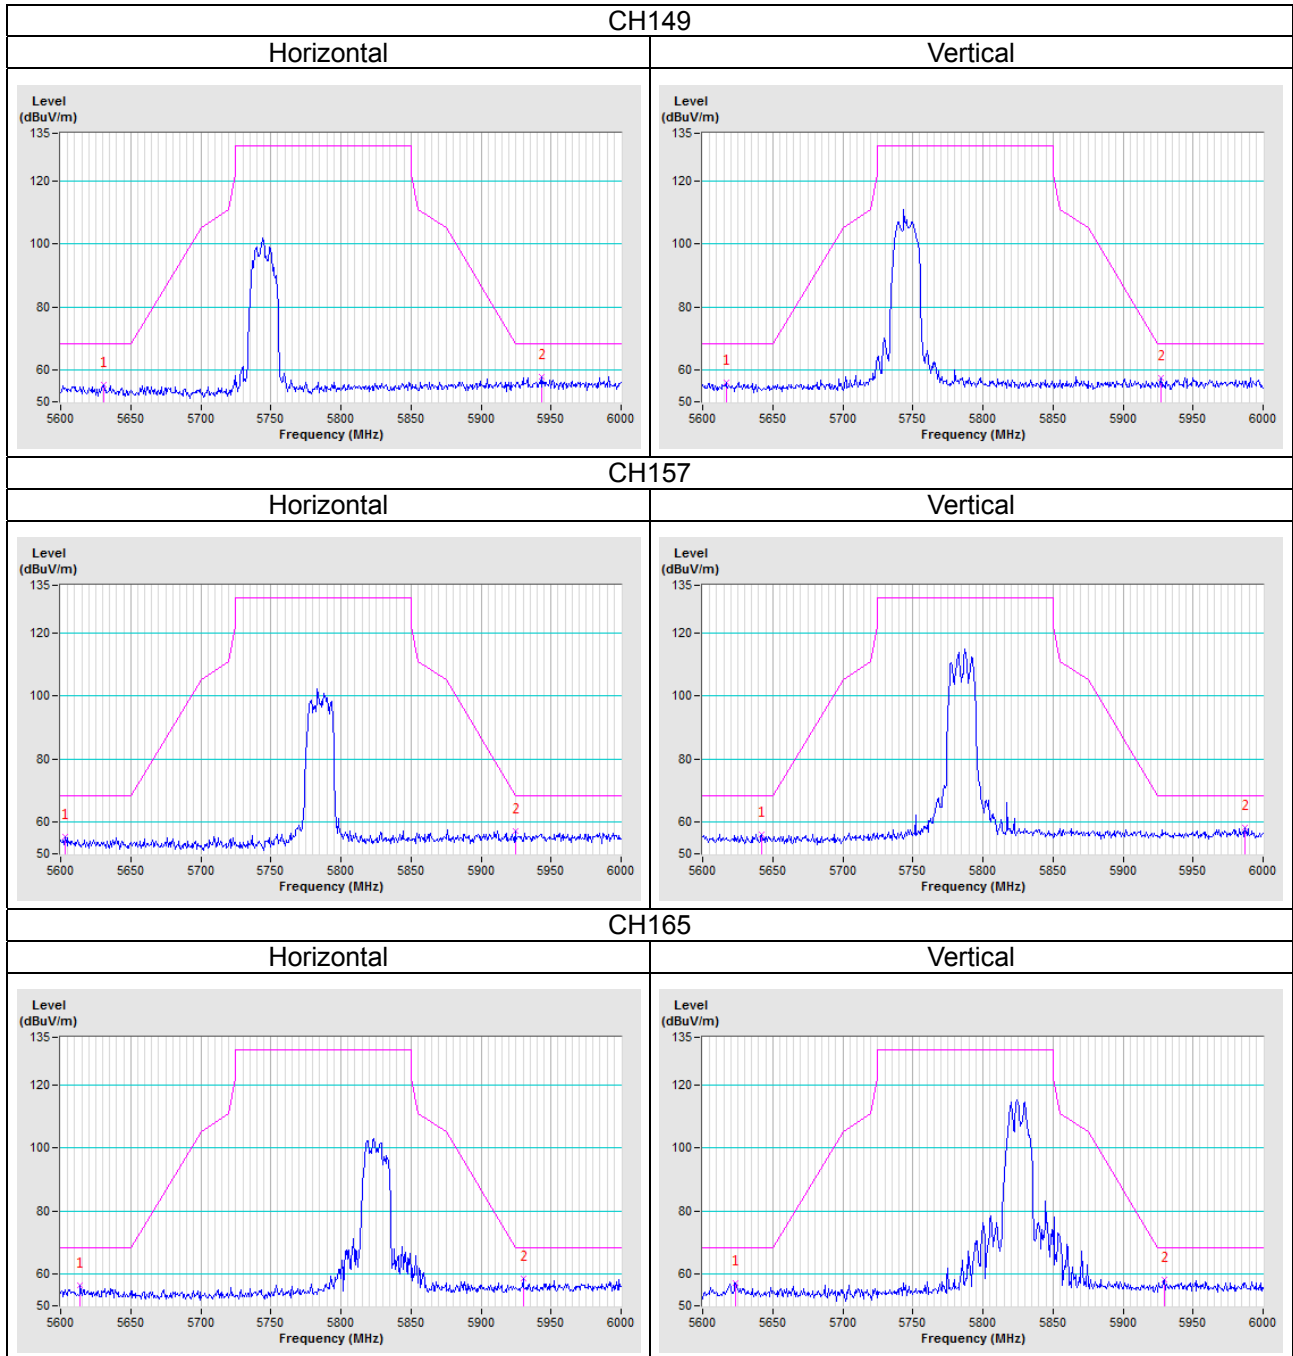

802.11n (HT40)

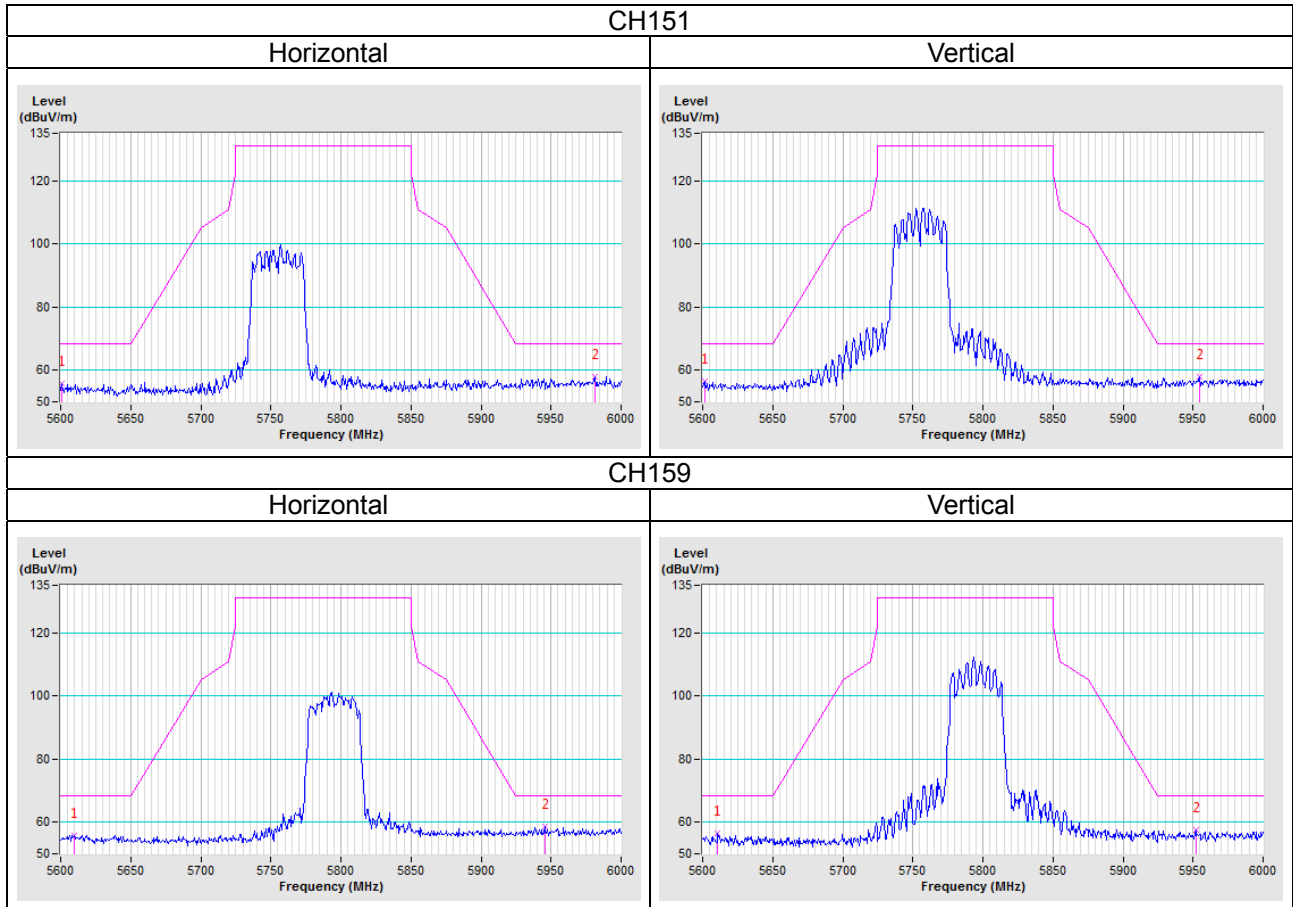

802.11ac (VHT80)

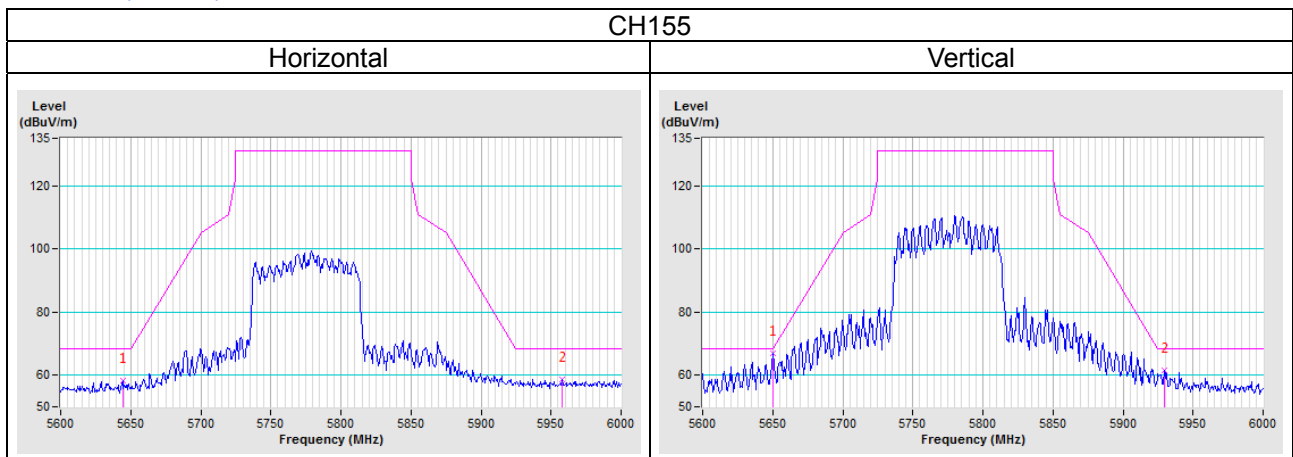

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---