

## FCC Test Report

**Report No.:** RF170113E13

**FCC ID:** KA2IR878A1

**Test Model:** DIR-878

**Received Date:** Jan. 16, 2017

**Test Date:** Mar. 15 to 20, 2017

**Issued Date:** Mar. 29, 2017

**Applicant:** D-Link Corporation

**Address:** 17595 Mt. Herrmann Street Fountain Valley, CA92708 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

|  |           |
|--|-----------|
| <b>Release Control Record</b> .....                              | <b>4</b>  |
| <b>1 Certificate of Conformity</b> .....                         | <b>5</b>  |
| <b>2 Summary of Test Results</b> .....                           | <b>6</b>  |
| 2.1 Measurement Uncertainty .....                                | 6         |
| 2.2 Modification Record .....                                    | 6         |
| <b>3 General Information</b> .....                               | <b>7</b>  |
| 3.1 General Description of EUT .....                             | 7         |
| 3.2 Description of Test Modes .....                              | 11        |
| 3.2.1 Test Mode Applicability and Tested Channel Detail .....    | 12        |
| 3.3 Duty Cycle of Test Signal .....                              | 14        |
| 3.4 Description of Support Units .....                           | 15        |
| 3.4.1 Configuration of System under Test .....                   | 16        |
| 3.5 General Description of Applied Standards .....               | 17        |
| <b>4 Test Types and Results</b> .....                            | <b>18</b> |
| 4.1 Radiated Emission and Bandedge Measurement .....             | 18        |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement ..... | 18        |
| 4.1.2 Test Instruments .....                                     | 19        |
| 4.1.3 Test Procedures .....                                      | 21        |
| 4.1.4 Deviation from Test Standard .....                         | 21        |
| 4.1.5 Test Setup .....   | 22        |
| 4.1.6 EUT Operating Conditions .....                             | 23        |
| 4.1.7 Test Results (Mode 1) .....                                | 24        |
| 4.1.8 Test Results (Mode 2) .....                                | 36        |
| 4.2 Conducted Emission Measurement .....                         | 49        |
| 4.2.1 Limits of Conducted Emission Measurement .....             | 49        |
| 4.2.2 Test Instruments .....                                     | 49        |
| 4.2.3 Test Procedures .....                                      | 50        |
| 4.2.4 Deviation from Test Standard .....                         | 50        |
| 4.2.5 Test Setup .....   | 50        |
| 4.2.6 EUT Operating Conditions .....                             | 50        |
| 4.2.7 Test Results (Mode 2) .....                                | 51        |
| 4.2.8 Test Results (Mode 3) .....                                | 53        |
| 4.2.9 Test Results (Mode 4) .....                                | 55        |
| 4.3 6dB Bandwidth Measurement .....                              | 57        |
| 4.3.1 Limits of 6dB Bandwidth Measurement .....                  | 57        |
| 4.3.2 Test Setup .....   | 57        |
| 4.3.3 Test Instruments .....                                     | 57        |
| 4.3.4 Test Procedure .....                                       | 57        |
| 4.3.5 Deviation from Test Standard .....                         | 57        |
| 4.3.6 EUT Operating Conditions .....                             | 57        |
| 4.3.7 Test Result .....  | 58        |
| 4.4 Conducted Output Power Measurement .....                     | 60        |
| 4.4.1 Limits of Conducted Output Power Measurement .....         | 60        |
| 4.4.2 Test Setup .....   | 60        |
| 4.4.3 Test Instruments .....                                     | 60        |
| 4.4.4 Test Procedures .....                                      | 60        |
| 4.4.5 Deviation from Test Standard .....                         | 60        |
| 4.4.6 EUT Operating Conditions .....                             | 60        |
| 4.4.7 Test Results (Mode 1) .....                                | 61        |
| 4.4.8 Test Results (Mode 2) .....                                | 62        |
| 4.5 Power Spectral Density Measurement .....                     | 63        |
| 4.5.1 Limits of Power Spectral Density Measurement .....         | 63        |
| 4.5.2 Test Setup .....   | 63        |

|   |           |
|---|-----------|
| 4.5.3 Test Instruments .....                                    | 63        |
| 4.5.4 Test Procedure .....                                      | 63        |
| 4.5.5 Deviation from Test Standard .....                        | 63        |
| 4.5.6 EUT Operating Condition .....                             | 63        |
| 4.5.7 Test Results (Mode 1).....                                | 64        |
| 4.5.8 Test Results (Mode 2).....                                | 67        |
| 4.6 Conducted Out of Band Emission Measurement .....            | 70        |
| 4.6.1 Limits of Conducted Out of Band Emission Measurement..... | 70        |
| 4.6.2 Test Setup.....   | 70        |
| 4.6.3 Test Instruments .....                                    | 70        |
| 4.6.4 Test Procedure .....                                      | 70        |
| 4.6.5 Deviation from Test Standard .....                        | 70        |
| 4.6.6 EUT Operating Condition .....                             | 70        |
| 4.6.7 Test Results .....  | 70        |
| <b>5 Pictures of Test Arrangements.....</b>                     | <b>87</b> |
| <b>Appendix – Information on the Testing Laboratories .....</b> | <b>88</b> |

### Release Control Record

| Issue No.   | Description       | Date Issued   |
|-------------|-------------------|---------------|
| RF170113E13 | Original release. | Mar. 29, 2017 |

## 1 Certificate of Conformity

**Product:** AC1900 MU-MIMO Wi-Fi Gigabit Router

**Brand:** D-Link

**Test Model:** DIR-878

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** D-Link Corporation

**Test Date:** Mar. 15 to 20, 2017

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Midoli Peng , **Date:** Mar. 29, 2017  
Midoli Peng / Specialist

**Approved by :** May Chen , **Date:** Mar. 29, 2017  
May Chen / Manager

## 2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (SECTION 15.247) |  |        |   |
|--|--|--------|---|
| FCC Clause                                     | Test Item                                    | Result | Remarks   |
| 15.207   | AC Power Conducted Emission                  | PASS   | Meet the requirement of limit. Minimum passing margin is -9.84dB at 0.41953MHz.                         |
| 15.205 /<br>15.209 /<br>15.247(d)              | Radiated Emissions and Band Edge Measurement | PASS   | Meet the requirement of limit. Minimum passing margin is -0.1dB at 2374.00MHz, 2483.50MHz & 2390.00MHz. |
| 15.247(d)                                      | Antenna Port Emission                        | PASS   | Meet the requirement of limit.  |
| 15.247(a)(2)                                   | 6dB bandwidth                                | PASS   | Meet the requirement of limit.  |
| 15.247(b)                                      | Conducted power                              | PASS   | Meet the requirement of limit.  |
| 15.247(e)                                      | Power Spectral Density                       | PASS   | Meet the requirement of limit.  |
| 15.203   | Antenna Requirement                          | PASS   | Antenna connector is i-pex (MHF) not a standard connector.  |

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                        | Frequency      | Expanded Uncertainty (k=2) ( $\pm$ ) |
|------------------------------------|----------------|--------------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 1.84 dB                              |
| Radiated Emissions up to 1 GHz     | 30MHz ~ 1GHz   | 5.30 dB                              |
| Radiated Emissions above 1 GHz     | 1GHz ~ 6GHz    | 4.78 dB                              |
|                                    | 6GHz ~ 18GHz   | 4.52 dB                              |
|                                    | 18GHz ~ 40GHz  | 5.08 dB                              |

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

|                       |   |
|-----------------------|---|
| Product               | AC1900 MU-MIMO Wi-Fi Gigabit Router   |
| Brand                 | D-Link  |
| Test Model            | DIR-878   |
| Status of EUT         | ENGINEERING SAMPLE  |
| Power Supply Rating   | DC 12V from power adapter   |
| Modulation Type       | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM<br>256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz band   |
| Modulation Technology | DSSS, OFDM  |
| Transfer Rate         | 802.11b: up to 11Mbps<br>802.11a/g: up to 54Mbps<br>802.11n: up to 600Mbps<br>802.11ac: up to 1733.3Mbps<br>802.11ac (80+80): up to 3466.7Mbps  |
| Operating Frequency   | <b>2.4GHz:</b> 2.412GHz ~ 2.462GHz<br><b>5GHz:</b> 5.18GHz ~ 5.24GHz, 5.745GHz ~ 5.825GHz   |
| Number of Channel     | <b>2.4GHz:</b><br>802.11b, 802.11g, 802.11n (HT20), VHT20: 11<br>802.11n (HT40), VHT40: 7<br><b>5GHz:</b><br>802.11a, 802.11n (HT20), 802.11ac (VHT20): 9<br>802.11n (HT40), 802.11ac (VHT40): 4<br>802.11ac (VHT80): 2<br>802.11ac (VHT80+80): 1 set   |
| Output Power          | <b>For Antenna set 1 (Gain : 2dBi)</b><br><b>2.4GHz:</b><br>788.724mW<br><b>5GHz:</b><br><b>5.18GHz ~ 5.24GHz:</b><br><b>CDD Mode:</b><br>995.277mW<br><b>Beamforming Mode:</b><br>571.911mW<br><b>5.745GHz ~ 5.825GHz:</b><br><b>CDD Mode:</b><br>975.714mW<br><b>Beamforming Mode:</b><br>600.3mW |

|                     |   |
|---------------------|---|
| Output Power        | <b>For Antenna set 2 (Gain : 5dBi)</b><br><b>2.4GHz:</b><br>788.724mW<br><b>5GHz:</b><br><b>5.18GHz ~ 5.24GHz:</b><br><b>CDD Mode:</b><br>322.367mW<br><b>Beamforming Mode:</b><br>313.257mW<br><b>5.745GHz ~ 5.825GHz:</b><br><b>CDD Mode:</b><br>655.424mW<br><b>Beamforming Mode:</b><br>310.007mW |
| Antenna Type        | Refer to Note   |
| Antenna Connector   | Refer to Note   |
| Accessory Device    | Adapter x 1   |
| Data Cable Supplied | NA  |

Note:

1. Simultaneously transmission condition.

| Condition | Technology    |             |
|-----------|---------------|-------------|
| 1         | WLAN (2.4GHz) | WLAN (5GHz) |

**Note:** The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied with a power adapter and following three different models could be chosen as following table:

| No | Brand                                 | Model No.         | Spec.   |
|----|---------------------------------------|-------------------|---|
| 1  | Frecom                                | F18L7-120150SPAU  | Input: 100-240V, 0.6A, 50/60Hz<br>Output: 12V, 1.5A<br>DC output cable (Unshielded, 1.2m) |
| 2  | Shenzhen Gongjin Electronics Co., Ltd | S18B72-120A150-C4 | Input: 100-240V, 0.7A, 50/60Hz<br>Output: 12V, 1.5A<br>DC output cable (Unshielded, 1.1m) |
| 3  | Frecom                                | WB-18D12R         | Input: 100-240V, 0.5A, 50-60Hz<br>Output: 12V, 1.5A<br>DC output cable (Unshielded, 1.2m) |

NOTE: For Radiated emission, the adapter 1 ~ 3, the worst case was found in adapter 3. Therefore only the test data of the adapter was recorded in this report.



3. The antennas provided to the EUT, please refer to the following table:

| Set 1 Antenna |                    |                       |              |                |
|---------------|--------------------|-----------------------|--------------|----------------|
| Chain No.     | Antenna Gain (dBi) | Frequency range (GHz) | Antenna Type | Connector Type |
| Chain 0       | 2                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 2                  | 5.15~5.85             |              |                |
| Chain 1       | 2                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 2                  | 5.15~5.85             |              |                |
| Chain 2       | 2                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 2                  | 5.15~5.85             |              |                |
| Chain 3       | 2                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 2                  | 5.15~5.85             |              |                |
| Set 2 Antenna |                    |                       |              |                |
| Chain No.     | Antenna Gain (dBi) | Frequency range (GHz) | Antenna Type | Connector Type |
| Chain 0       | 5                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 5                  | 5.15~5.85             |              |                |
| Chain 1       | 5                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 5                  | 5.15~5.85             |              |                |
| Chain 2       | 5                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 5                  | 5.15~5.85             |              |                |
| Chain 3       | 5                  | 2.4~2.4835            | Dipole       | i-pex (MHF)    |
|               | 5                  | 5.15~5.85             |              |                |

4. The Directional gain table:

| Frequency (MHz) | Max Gain (dBi)  |
|-----------------|---|
| 2412-2462       | 7.39 (for Set 1 Antenna)<br>10.06 (for Set 2 Antenna) |
| 5180-5825       | 7.75 (for Set 1 Antenna)<br>10.90 (for Set 2 Antenna) |

Note:

1. Non-TxBF mode & TxBF mode antenna gain refer to KDB 662911 F 2) f) (ii)

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k/20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;

$G_k$  is the gain in dBi of the  $k$ th antenna.

2. Above directional gain were calculated from actual measurement data.

5. The EUT incorporates a MIMO function.

| 2.4GHz Band                          |                 |                       |          |
|--------------------------------------|-----------------|-----------------------|----------|
| MODULATION MODE                      | DATA RATE (MCS) | TX & RX CONFIGURATION |          |
| 802.11b                              | 1 ~ 11Mbps      | 4TX                   | 4RX      |
| 802.11g                              | 6 ~ 54Mbps      | 4TX                   | 4RX      |
| 802.11n (HT20)                       | MCS 0~7         | 4TX                   | 4RX      |
|                                      | MCS 8~15        | 4TX                   | 4RX      |
|                                      | MCS 16~23       | 4TX                   | 4RX      |
|                                      | MCS 24~31       | 4TX                   | 4RX      |
| 802.11n (HT40)                       | MCS 0~7         | 4TX                   | 4RX      |
|                                      | MCS 8~15        | 4TX                   | 4RX      |
|                                      | MCS 16~23       | 4TX                   | 4RX      |
|                                      | MCS 24~31       | 4TX                   | 4RX      |
| VHT20                                | MCS 0~8, Nss=1  | 4TX                   | 4RX      |
|                                      | MCS 0~8, Nss=2  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=3  | 4TX                   | 4RX      |
|                                      | MCS 0~8, Nss=4  | 4TX                   | 4RX      |
| VHT40                                | MCS0~9 Nss=1    | 4TX                   | 4RX      |
|                                      | MCS0~9 Nss=2    | 4TX                   | 4RX      |
|                                      | MCS0~9 Nss=3    | 4TX                   | 4RX      |
|                                      | MCS0~9 Nss=4    | 4TX                   | 4RX      |
| 5GHz Band                            |                 |                       |          |
| MODULATION MODE                      | DATA RATE (MCS) | TX & RX CONFIGURATION |          |
| 802.11a                              | 6 ~ 54Mbps      | 4TX                   | 4RX      |
| 802.11n (HT20)                       | MCS 0~7         | 4TX                   | 4RX      |
|                                      | MCS 8~15        | 4TX                   | 4RX      |
|                                      | MCS 16~23       | 4TX                   | 4RX      |
|                                      | MCS 24~31       | 4TX                   | 4RX      |
| 802.11n (HT40)                       | MCS 0~7         | 4TX                   | 4RX      |
|                                      | MCS 8~15        | 4TX                   | 4RX      |
|                                      | MCS 16~23       | 4TX                   | 4RX      |
|                                      | MCS 24~31       | 4TX                   | 4RX      |
| 802.11ac (VHT20)                     | MCS 0~8, Nss=1  | 4TX                   | 4RX      |
|                                      | MCS 0~8, Nss=2  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=3  | 4TX                   | 4RX      |
|                                      | MCS 0~8, Nss=4  | 4TX                   | 4RX      |
| 802.11ac (VHT40)                     | MCS 0~9, Nss=1  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=2  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=3  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=4  | 4TX                   | 4RX      |
| 802.11ac (VHT80)                     | MCS 0~9, Nss=1  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=2  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=3  | 4TX                   | 4RX      |
|                                      | MCS 0~9, Nss=4  | 4TX                   | 4RX      |
| 802.11ac (VHT80+VHT80) noncontiguous | MCS 0~9, Nss=1  | 2TX+2TX               | 2RX +2RX |
|                                      | MCS 0~9, Nss=2  | 2TX+2TX               | 2RX +2RX |

Note:

- All of modulation mode support beamforming function except 2.4GHz & 802.11a modulation mode.
- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 2412MHz   | 7       | 2442MHz   |
| 2       | 2417MHz   | 8       | 2447MHz   |
| 3       | 2422MHz   | 9       | 2452MHz   |
| 4       | 2427MHz   | 10      | 2457MHz   |
| 5       | 2432MHz   | 11      | 2462MHz   |
| 6       | 2437MHz   |         |           |

7 channels are provided for 802.11n (HT40), VHT40:

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 3       | 2422MHz   | 7       | 2442MHz   |
| 4       | 2427MHz   | 8       | 2447MHz   |
| 5       | 2432MHz   | 9       | 2452MHz   |
| 6       | 2437MHz   |         |           |

### 3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO |           |     |      | DESCRIPTION                             |
|--------------------|---------------|-----------|-----|------|---|
|                    | RE $\geq$ 1G  | RE $<$ 1G | PLC | APCM |   |
| 1                  | √             | -         | -   | √    | Adapter 3 + antenna set 1 (Gain : 2dBi) |
| 2                  | √             | √         | √   | √    | Adapter 3 + antenna set 2 (Gain : 5dBi) |
| 3                  | -             | -         | √   | -    | Adapter 1 + antenna set 2 (Gain : 5dBi) |
| 4                  | -             | -         | √   | -    | Adapter 2 + antenna set 2 (Gain : 5dBi) |

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE $<$ 1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

**NOTE:** 1.The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.  
 2."-"means no effect.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE           | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b        | 1 to 11           | 1, 6, 11       | DSSS                  | DBPSK           | 1                |
| 802.11g        | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6                |
| 802.11n (HT20) | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6.5              |
| 802.11n (HT40) | 3 to 9            | 3, 6, 9        | OFDM                  | BPSK            | 13.5             |

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE    | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11           | 6              | DSSS                  | DBPSK           | 1                |

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE    | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11           | 6              | DSSS                  | DBPSK           | 1                |

### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE           | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b        | 1 to 11           | 1, 6, 11       | DSSS                  | DBPSK           | 1                |
| 802.11g        | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6                |
| 802.11n (HT20) | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6.5              |
| 802.11n (HT40) | 3 to 9            | 3, 6, 9        | OFDM                  | BPSK            | 13.5             |


### Test Condition:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER  | TESTED BY     |
|---------------|--------------------------|--------------|---------------|
| RE $\geq$ 1G  | 23deg. C, 66%RH          | 120Vac, 60Hz | Terry Huang   |
| RE $<$ 1G     | 25deg. C, 72%RH          | 120Vac, 60Hz | Weiwei Lo     |
| PLC           | 21deg. C, 75%RH          | 120Vac, 60Hz | Weiwei Lo     |
| APCM          | 24deg. C, 63%RH          | 120Vac, 60Hz | Anderson Chen |


### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.


802.11b

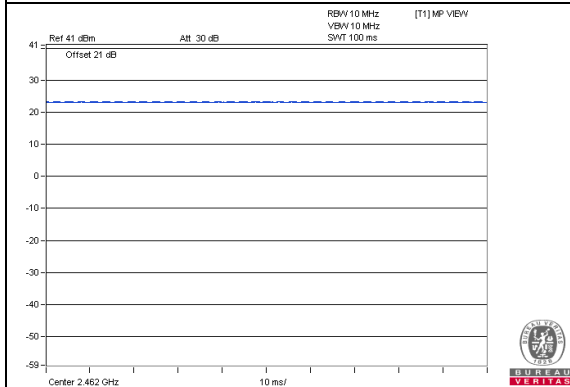


802.11g

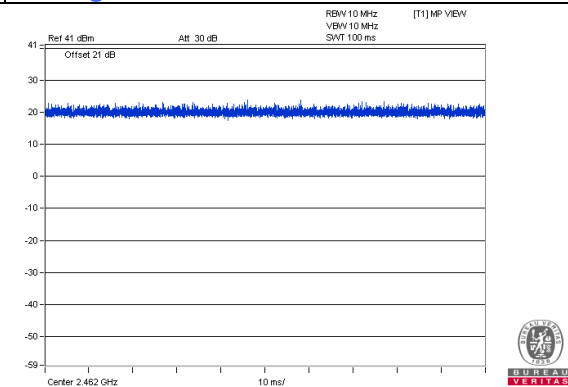

802.11n (HT20)

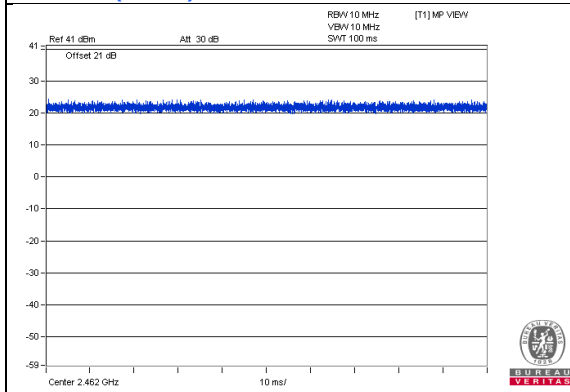

802.11n (HT40)

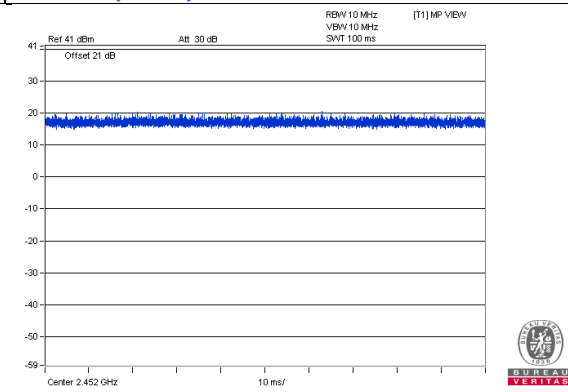

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| ID | Product | Brand | Model No. | Serial No. | FCC ID  | Remarks         |
|----|---------|-------|-----------|------------|---------|-----------------|
| A. | Laptop  | DELL  | E5430     | 4YV4VY1    | FCC DoC | Provided by Lab |
| B. | Laptop  | DELL  | E5430     | HYV4VY1    | FCC DoC | Provided by Lab |

Note:

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Descriptions | Qty. | Length (m)                                 | Shielding (Yes/No) | Cores (Qty.) | Remarks            |
|----|--------------|------|--|--------------------|--------------|--------------------|
| 1. | DC Cable     | 1    | 1.1(For adapter 2)<br>1.2(For adapter 1&3) | No                 | 0            | Supplied by client |
| 2. | RJ-45 Cable  | 1    | 10   | No                 | 0            | Provided by Lab    |
| 3. | RJ-45 Cable  | 1    | 10   | No                 | 0            | Provided by Lab    |

### 3.4.1 Configuration of System under Test

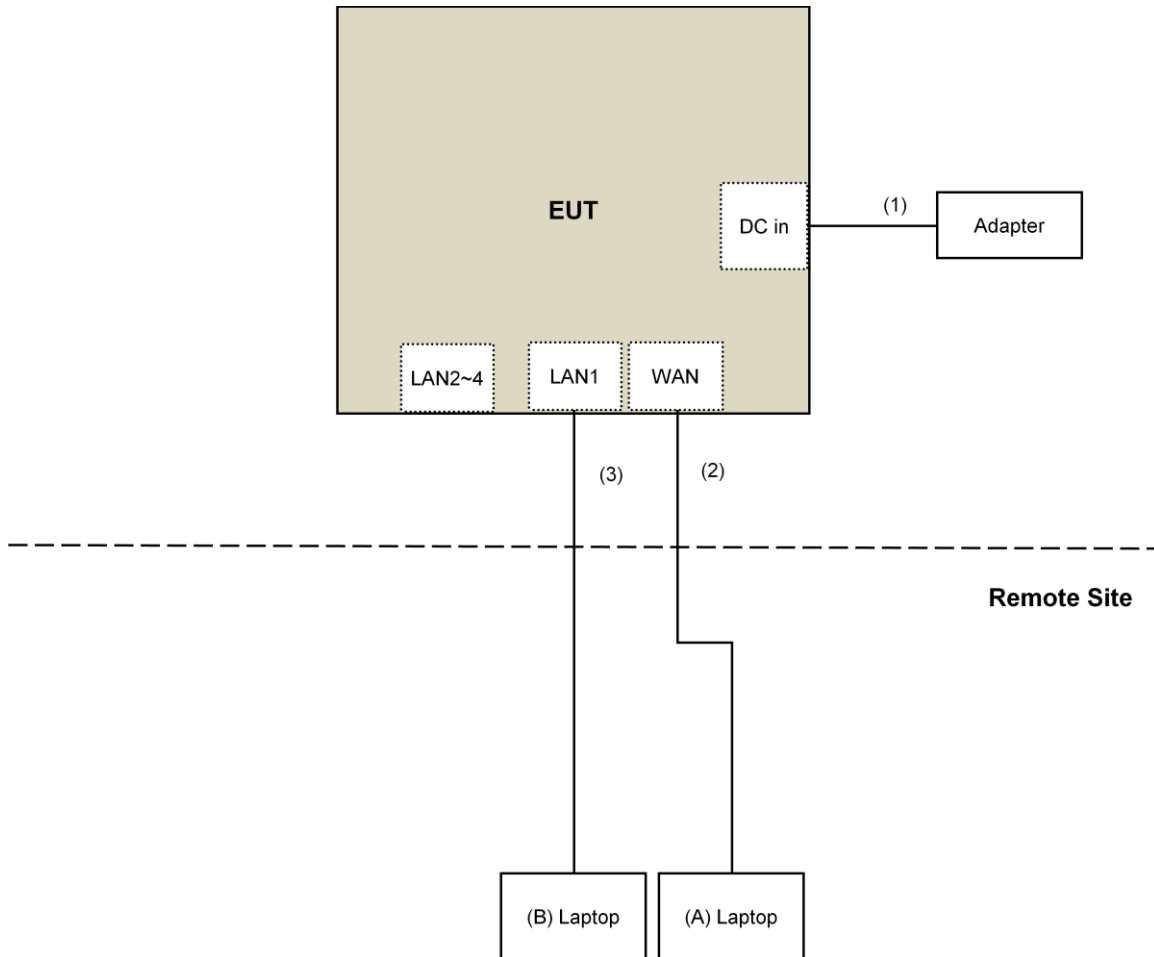



### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
**KDB 558074 D01 DTS Meas Guidance v03r05**  
**KDB 662911 D01 Multiple Transmitter Output v02r01**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.1.2 Test Instruments

| DESCRIPTION & MANUFACTURER                     | MODEL NO.   | SERIAL NO.                    | CALIBRATED DATE                                 | CALIBRATED UNTIL                                |
|--|---|-------------------------------|---|---|
| Test Receiver<br>Keysight                      | N9038A  | MY54450088                    | July 20, 2016                                   | July 19, 2017                                   |
| Pre-Amplifier <sup>(*)</sup><br>EMCI           | EMC001340   | 980142                        | Jan. 20, 2016                                   | Jan. 19, 2018                                   |
| Loop Antenna <sup>(*)</sup><br>Electro-Metrics | EM-6879   | 264                           | Dec. 16, 2016                                   | Dec. 15, 2018                                   |
| RF Cable                                       | NA  | LOOPCAB-001<br>LOOPCAB-002    | Jan. 17, 2017                                   | Jan. 16, 2018                                   |
| Pre-Amplifier<br>Mini-Circuits                 | ZFL-1000VH2<br>B  | AMP-ZFL-01                    | Nov. 10, 2016                                   | Nov. 09, 2017                                   |
| Trilog Broadband Antenna<br>SCHWARZBECK        | VULB 9168   | 9168-406                      | Dec. 13, 2016                                   | Dec. 12, 2017                                   |
| RF Cable                                       | 8D  | 966-4-1<br>966-4-2<br>966-4-3 | Apr. 02, 2016                                   | Apr. 01, 2017                                   |
| Fixed attenuator<br>Mini-Circuits              | UNAT-5+   | PAD-3m-4-01                   | Oct. 05, 2016                                   | Oct. 04, 2017                                   |
| Horn_Antenna<br>SCHWARZBECK                    | BBHA 9120D  | 9120D-783                     | Dec. 27, 2016                                   | Dec. 26, 2017                                   |
| Pre-Amplifier<br>EMCI                          | EMC12630SE  | 980385                        | Feb. 02, 2017                                   | Feb. 01, 2018                                   |
| RF Cable                                       | EMC104-SM-<br>SM-2000<br>EMC104-SM-<br>SM-5000<br>EMC104-SM-<br>SM-5000 | 160923<br>150318<br>150323    | Feb. 02, 2017<br>Mar. 30, 2016<br>Mar. 30, 2016 | Feb. 01, 2018<br>Mar. 29, 2017<br>Mar. 29, 2017 |
| Pre-Amplifier<br>EMCI                          | EMC184045S<br>E   | 980387                        | Feb. 02, 2017                                   | Feb. 01, 2018                                   |
| Horn_Antenna<br>SCHWARZBECK                    | BBHA 9170   | BBHA9170608                   | Dec. 15, 2016                                   | Dec. 14, 2017                                   |
| RF Cable                                       | SUCOFLEX<br>102   | 36432/2<br>36433/2            | Jan. 15, 2017                                   | Jan. 14, 2018                                   |
| Software                                       | ADT_Radiated<br>_V8.7.08  | NA                            | NA  | NA  |
| Antenna Tower & Turn Table<br>Max-Full         | MF-7802   | MF780208410                   | NA  | NA  |
| Boresight Antenna Fixture                      | FBA-01  | FBA-SIP02                     | NA  | NA  |
| Spectrum Analyzer<br>R&S                       | FSV40   | 100964                        | June 28, 2016                                   | June 27, 2017                                   |
| Power meter<br>Anritsu                         | ML2495A   | 0824006                       | May 26, 2016                                    | May 25, 2017                                    |
| Power sensor<br>Anritsu                        | MA2411B   | 0738172                       | May 26, 2016                                    | May 25, 2017                                    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
6. Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: Mar. 15 to 20, 2017

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

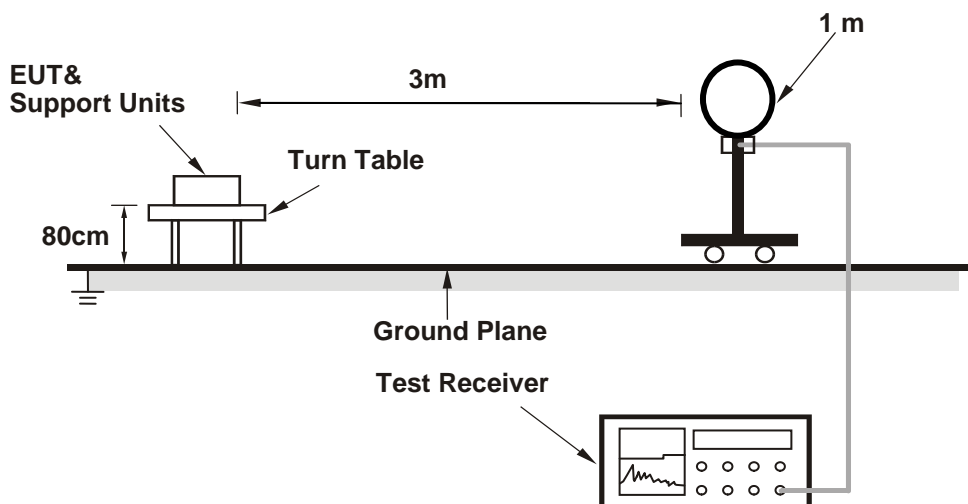

##### For Radiated emission 30MHz to 1GHz

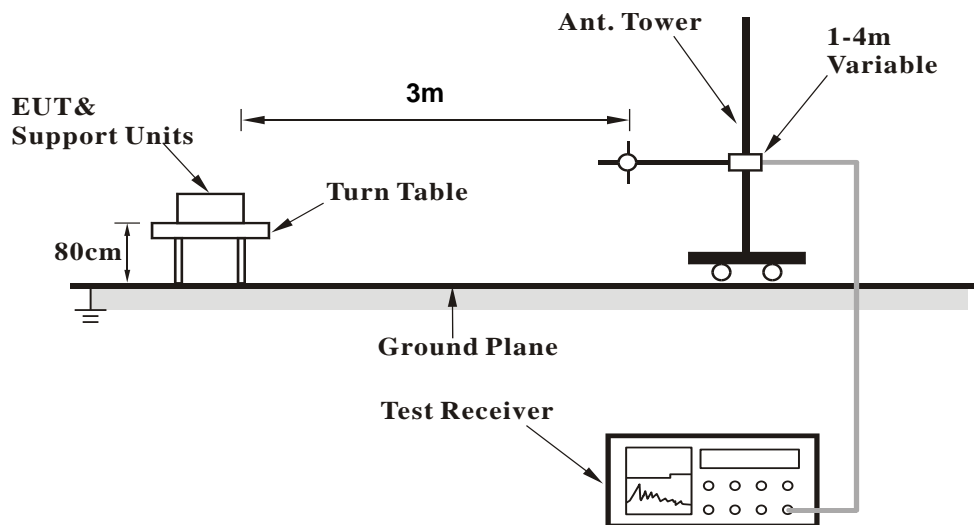

### For Radiated emission above 1GHz

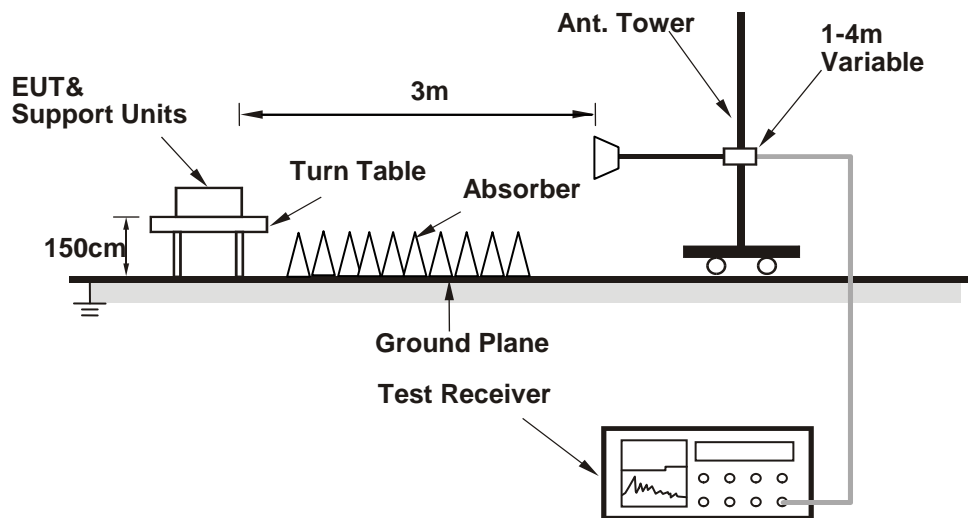

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (MT7615 QA 0.0.1.73) has been activated to set the EUT on specific status.

## 4.1.7 Test Results (Mode 1)

## Above 1GHz Data :

## 802.11b

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2374.00        | 50.8 PK                       | 74.0              | -23.2          | 1.69 H                   | 163                        | 53.0                   | -2.2                           |
| 2   | 2374.00        | 44.2 AV                       | 54.0              | -9.8           | 1.69 H                   | 163                        | 46.4                   | -2.2                           |
| 3   | *2412.00       | 111.3 PK                      |                   |                | 1.69 H                   | 163                        | 113.3                  | -2.0                           |
| 4   | *2412.00       | 108.9 AV                      |                   |                | 1.69 H                   | 163                        | 110.9                  | -2.0                           |
| 5   | 4824.00        | 45.6 PK                       | 74.0              | -28.4          | 1.02 H                   | 8                          | 43.4                   | 2.2                            |
| 6   | 4824.00        | 40.4 AV                       | 54.0              | -13.6          | 1.02 H                   | 8                          | 38.2                   | 2.2                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2374.00        | 60.5 PK                       | 74.0              | -13.5          | 1.23 V                   | 29                         | 62.7                   | -2.2                           |
| 2   | <b>2374.00</b> | <b>53.9 AV</b>                | <b>54.0</b>       | <b>-0.1</b>    | <b>1.23 V</b>            | <b>29</b>                  | <b>56.1</b>            | <b>-2.2</b>                    |
| 3   | *2412.00       | 121.4 PK                      |                   |                | 1.23 V                   | 29                         | 123.4                  | -2.0                           |
| 4   | *2412.00       | 119.1 AV                      |                   |                | 1.23 V                   | 29                         | 121.1                  | -2.0                           |
| 5   | 4824.00        | 48.4 PK                       | 74.0              | -25.6          | 1.05 V                   | 131                        | 46.2                   | 2.2                            |
| 6   | 4824.00        | 43.8 AV                       | 54.0              | -10.2          | 1.05 V                   | 131                        | 41.6                   | 2.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 50.8 PK                       | 74.0              | -23.2          | 1.67 H                   | 162                        | 52.9                   | -2.1                           |
| 2   | 2390.00        | 40.0 AV                       | 54.0              | -14.0          | 1.67 H                   | 162                        | 42.1                   | -2.1                           |
| 3   | *2437.00       | 112.2 PK                      |                   |                | 1.67 H                   | 162                        | 114.1                  | -1.9                           |
| 4   | *2437.00       | 109.7 AV                      |                   |                | 1.67 H                   | 162                        | 111.6                  | -1.9                           |
| 5   | 2483.50        | 51.7 PK                       | 74.0              | -22.3          | 1.67 H                   | 162                        | 53.4                   | -1.7                           |
| 6   | 2483.50        | 40.9 AV                       | 54.0              | -13.1          | 1.67 H                   | 162                        | 42.6                   | -1.7                           |
| 7   | 4874.00        | 46.6 PK                       | 74.0              | -27.4          | 1.00 H                   | 20                         | 44.3                   | 2.3                            |
| 8   | 4874.00        | 42.4 AV                       | 54.0              | -11.6          | 1.00 H                   | 20                         | 40.1                   | 2.3                            |
| 9   | 7311.00        | 47.6 PK                       | 74.0              | -26.4          | 1.69 H                   | 206                        | 39.2                   | 8.4                            |
| 10  | 7311.00        | 36.9 AV                       | 54.0              | -17.1          | 1.69 H                   | 206                        | 28.5                   | 8.4                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 60.3 PK                       | 74.0              | -13.7          | 1.53 V                   | 29                         | 62.4                   | -2.1                           |
| 2   | 2390.00        | 53.7 AV                       | 54.0              | -0.3           | 1.53 V                   | 29                         | 55.8                   | -2.1                           |
| 3   | *2437.00       | 122.2 PK                      |                   |                | 1.53 V                   | 29                         | 124.1                  | -1.9                           |
| 4   | *2437.00       | 120.0 AV                      |                   |                | 1.53 V                   | 29                         | 121.9                  | -1.9                           |
| 5   | 2483.50        | 60.2 PK                       | 74.0              | -13.8          | 1.53 V                   | 29                         | 61.9                   | -1.7                           |
| 6   | 2483.50        | 50.7 AV                       | 54.0              | -3.3           | 1.53 V                   | 29                         | 52.4                   | -1.7                           |
| 7   | 4874.00        | 49.7 PK                       | 74.0              | -24.3          | 1.05 V                   | 118                        | 47.4                   | 2.3                            |
| 8   | 4874.00        | 47.1 AV                       | 54.0              | -6.9           | 1.05 V                   | 118                        | 44.8                   | 2.3                            |
| 9   | 7311.00        | 49.3 PK                       | 74.0              | -24.7          | 1.50 V                   | 228                        | 40.9                   | 8.4                            |
| 10  | 7311.00        | 38.0 AV                       | 54.0              | -16.0          | 1.50 V                   | 228                        | 29.6                   | 8.4                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 110.8 PK                      |                   |                | 1.09 H                   | 164                        | 112.6                  | -1.8                           |
| 2   | *2462.00       | 106.8 AV                      |                   |                | 1.09 H                   | 164                        | 108.6                  | -1.8                           |
| 3   | 2483.50        | 49.8 PK                       | 74.0              | -24.2          | 1.09 H                   | 164                        | 51.5                   | -1.7                           |
| 4   | 2483.50        | 42.3 AV                       | 54.0              | -11.7          | 1.09 H                   | 164                        | 44.0                   | -1.7                           |
| 5   | 4924.00        | 46.5 PK                       | 74.0              | -27.5          | 1.10 H                   | 21                         | 44.1                   | 2.4                            |
| 6   | 4924.00        | 40.3 AV                       | 54.0              | -13.7          | 1.10 H                   | 21                         | 37.9                   | 2.4                            |
| 7   | 7386.00        | 47.8 PK                       | 74.0              | -26.2          | 1.54 H                   | 335                        | 39.3                   | 8.5                            |
| 8   | 7386.00        | 34.2 AV                       | 54.0              | -19.8          | 1.54 H                   | 335                        | 25.7                   | 8.5                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 119.3 PK                      |                   |                | 1.32 V                   | 27                         | 121.1                  | -1.8                           |
| 2   | *2462.00       | 117.0 AV                      |                   |                | 1.32 V                   | 27                         | 118.8                  | -1.8                           |
| 3   | 2483.50        | 61.3 PK                       | 74.0              | -12.7          | 1.32 V                   | 27                         | 63.0                   | -1.7                           |
| 4   | 2483.50        | 53.7 AV                       | 54.0              | -0.3           | 1.32 V                   | 27                         | 55.4                   | -1.7                           |
| 5   | 4924.00        | 48.7 PK                       | 74.0              | -25.3          | 1.09 V                   | 117                        | 46.3                   | 2.4                            |
| 6   | 4924.00        | 43.9 AV                       | 54.0              | -10.1          | 1.09 V                   | 117                        | 41.5                   | 2.4                            |
| 7   | 7386.00        | 48.1 PK                       | 74.0              | -25.9          | 1.44 V                   | 237                        | 39.6                   | 8.5                            |
| 8   | 7386.00        | 36.5 AV                       | 54.0              | -17.5          | 1.44 V                   | 237                        | 28.0                   | 8.5                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11g**

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 49.6 PK                       | 74.0              | -24.4          | 1.08 H                   | 161                        | 51.7                   | -2.1                           |
| 2   | 2390.00        | 42.3 AV                       | 54.0              | -11.7          | 1.08 H                   | 161                        | 44.4                   | -2.1                           |
| 3   | *2412.00       | 111.9 PK                      |                   |                | 1.08 H                   | 161                        | 113.9                  | -2.0                           |
| 4   | *2412.00       | 100.8 AV                      |                   |                | 1.08 H                   | 161                        | 102.8                  | -2.0                           |
| 5   | 4824.00        | 42.6 PK                       | 74.0              | -31.4          | 1.00 H                   | 12                         | 40.4                   | 2.2                            |
| 6   | 4824.00        | 31.7 AV                       | 54.0              | -22.3          | 1.00 H                   | 12                         | 29.5                   | 2.2                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 67.7 PK                       | 74.0              | -6.3           | 1.00 V                   | 28                         | 69.8                   | -2.1                           |
| 2   | 2390.00        | 53.7 AV                       | 54.0              | -0.3           | 1.00 V                   | 28                         | 55.8                   | -2.1                           |
| 3   | *2412.00       | 119.3 PK                      |                   |                | 1.00 V                   | 28                         | 121.3                  | -2.0                           |
| 4   | *2412.00       | 109.2 AV                      |                   |                | 1.00 V                   | 28                         | 111.2                  | -2.0                           |
| 5   | 4824.00        | 46.8 PK                       | 74.0              | -27.2          | 1.01 V                   | 157                        | 44.6                   | 2.2                            |
| 6   | 4824.00        | 34.5 AV                       | 54.0              | -19.5          | 1.01 V                   | 157                        | 32.3                   | 2.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 114.8 PK                |                |             | 1.04 H             | 172                  | 116.7            | -1.9                     |
| 2   | *2437.00    | 105.2 AV                |                |             | 1.04 H             | 172                  | 107.1            | -1.9                     |
| 3   | 2483.50     | 52.2 PK                 | 74.0           | -21.8       | 1.04 H             | 172                  | 53.9             | -1.7                     |
| 4   | 2483.50     | 43.8 AV                 | 54.0           | -10.2       | 1.04 H             | 172                  | 45.5             | -1.7                     |
| 5   | 4874.00     | 43.5 PK                 | 74.0           | -30.5       | 1.48 H             | 37                   | 41.2             | 2.3                      |
| 6   | 4874.00     | 32.2 AV                 | 54.0           | -21.8       | 1.48 H             | 37                   | 29.9             | 2.3                      |
| 7   | 7311.00     | 47.8 PK                 | 74.0           | -26.2       | 1.55 H             | 299                  | 39.4             | 8.4                      |
| 8   | 7311.00     | 36.1 AV                 | 54.0           | -17.9       | 1.55 H             | 299                  | 27.7             | 8.4                      |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 125.3 PK                |                |             | 1.44 V             | 30                   | 127.2            | -1.9                     |
| 2   | *2437.00    | 115.7 AV                |                |             | 1.44 V             | 30                   | 117.6            | -1.9                     |
| 3   | 2483.50     | 70.6 PK                 | 74.0           | -3.4        | 1.44 V             | 30                   | 72.3             | -1.7                     |
| 4   | 2483.50     | 53.5 AV                 | 54.0           | -0.5        | 1.44 V             | 30                   | 55.2             | -1.7                     |
| 5   | 4874.00     | 46.0 PK                 | 74.0           | -28.0       | 1.32 V             | 138                  | 43.7             | 2.3                      |
| 6   | 4874.00     | 34.8 AV                 | 54.0           | -19.2       | 1.32 V             | 138                  | 32.5             | 2.3                      |
| 7   | 7311.00     | 48.3 PK                 | 74.0           | -25.7       | 1.50 V             | 332                  | 39.9             | 8.4                      |
| 8   | 7311.00     | 36.2 AV                 | 54.0           | -17.8       | 1.50 V             | 332                  | 27.8             | 8.4                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 109.5 PK                      |                   |                | 1.00 H                   | 177                        | 111.3                  | -1.8                           |
| 2   | *2462.00       | 99.2 AV                       |                   |                | 1.00 H                   | 177                        | 101.0                  | -1.8                           |
| 3   | 2483.50        | 50.9 PK                       | 74.0              | -23.1          | 1.00 H                   | 177                        | 52.6                   | -1.7                           |
| 4   | 2483.50        | 43.4 AV                       | 54.0              | -10.6          | 1.00 H                   | 177                        | 45.1                   | -1.7                           |
| 5   | 4924.00        | 42.4 PK                       | 74.0              | -31.6          | 1.08 H                   | 5                          | 40.0                   | 2.4                            |
| 6   | 4924.00        | 31.9 AV                       | 54.0              | -22.1          | 1.08 H                   | 5                          | 29.5                   | 2.4                            |
| 7   | 7386.00        | 46.9 PK                       | 74.0              | -27.1          | 2.10 H                   | 17                         | 38.4                   | 8.5                            |
| 8   | 7386.00        | 36.5 AV                       | 54.0              | -17.5          | 2.10 H                   | 17                         | 28.0                   | 8.5                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 119.3 PK                      |                   |                | 1.00 V                   | 29                         | 121.1                  | -1.8                           |
| 2   | *2462.00       | 109.1 AV                      |                   |                | 1.00 V                   | 29                         | 110.9                  | -1.8                           |
| 3   | 2483.50        | 72.9 PK                       | 74.0              | -1.1           | 1.00 V                   | 29                         | 74.6                   | -1.7                           |
| 4   | 2483.50        | 53.7 AV                       | 54.0              | -0.3           | 1.00 V                   | 29                         | 55.4                   | -1.7                           |
| 5   | 4924.00        | 46.6 PK                       | 74.0              | -27.4          | 1.09 V                   | 153                        | 44.2                   | 2.4                            |
| 6   | 4924.00        | 34.4 AV                       | 54.0              | -19.6          | 1.09 V                   | 153                        | 32.0                   | 2.4                            |
| 7   | 7386.00        | 46.7 PK                       | 74.0              | -27.3          | 1.57 V                   | 172                        | 38.2                   | 8.5                            |
| 8   | 7386.00        | 36.4 AV                       | 54.0              | -17.6          | 1.57 V                   | 172                        | 27.9                   | 8.5                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 51.3 PK                       | 74.0              | -22.7          | 1.14 H                   | 106                        | 53.4                   | -2.1                           |
| 2   | 2390.00        | 43.5 AV                       | 54.0              | -10.5          | 1.14 H                   | 106                        | 45.6                   | -2.1                           |
| 3   | *2412.00       | 103.9 PK                      |                   |                | 1.14 H                   | 106                        | 105.9                  | -2.0                           |
| 4   | *2412.00       | 92.2 AV                       |                   |                | 1.14 H                   | 106                        | 94.2                   | -2.0                           |
| 5   | 4824.00        | 42.9 PK                       | 74.0              | -31.1          | 1.19 H                   | 9                          | 40.7                   | 2.2                            |
| 6   | 4824.00        | 32.0 AV                       | 54.0              | -22.0          | 1.19 H                   | 9                          | 29.8                   | 2.2                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 70.7 PK                       | 74.0              | -3.3           | 1.45 V                   | 27                         | 72.8                   | -2.1                           |
| 2   | 2390.00        | 53.7 AV                       | 54.0              | -0.3           | 1.45 V                   | 27                         | 55.8                   | -2.1                           |
| 3   | *2412.00       | 110.5 PK                      |                   |                | 1.45 V                   | 27                         | 112.5                  | -2.0                           |
| 4   | *2412.00       | 100.9 AV                      |                   |                | 1.45 V                   | 27                         | 102.9                  | -2.0                           |
| 5   | 4824.00        | 46.8 PK                       | 74.0              | -27.2          | 1.02 V                   | 155                        | 44.6                   | 2.2                            |
| 6   | 4824.00        | 34.5 AV                       | 54.0              | -19.5          | 1.02 V                   | 155                        | 32.3                   | 2.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2437.00       | 106.8 PK                      |                   |                | 1.14 H                   | 102                        | 108.7                  | -1.9                           |
| 2   | *2437.00       | 96.9 AV                       |                   |                | 1.14 H                   | 102                        | 98.8                   | -1.9                           |
| 3   | 2483.50        | 50.5 PK                       | 74.0              | -23.5          | 1.14 H                   | 102                        | 52.2                   | -1.7                           |
| 4   | 2483.50        | 42.6 AV                       | 54.0              | -11.4          | 1.14 H                   | 102                        | 44.3                   | -1.7                           |
| 5   | 4874.00        | 43.9 PK                       | 74.0              | -30.1          | 1.48 H                   | 47                         | 41.6                   | 2.3                            |
| 6   | 4874.00        | 32.3 AV                       | 54.0              | -21.7          | 1.48 H                   | 47                         | 30.0                   | 2.3                            |
| 7   | 7311.00        | 48.1 PK                       | 74.0              | -25.9          | 1.54 H                   | 293                        | 39.7                   | 8.4                            |
| 8   | 7311.00        | 36.2 AV                       | 54.0              | -17.8          | 1.54 H                   | 293                        | 27.8                   | 8.4                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2437.00       | 116.2 PK                      |                   |                | 2.05 V                   | 27                         | 118.1                  | -1.9                           |
| 2   | *2437.00       | 106.7 AV                      |                   |                | 2.05 V                   | 27                         | 108.6                  | -1.9                           |
| 3   | 2483.50        | 70.9 PK                       | 74.0              | -3.1           | 2.05 V                   | 27                         | 72.6                   | -1.7                           |
| 4   | 2483.50        | 52.7 AV                       | 54.0              | -1.3           | 2.05 V                   | 27                         | 54.4                   | -1.7                           |
| 5   | 4874.00        | 47.5 PK                       | 74.0              | -26.5          | 1.27 V                   | 142                        | 45.2                   | 2.3                            |
| 6   | 4874.00        | 35.6 AV                       | 54.0              | -18.4          | 1.27 V                   | 142                        | 33.3                   | 2.3                            |
| 7   | 7311.00        | 48.3 PK                       | 74.0              | -25.7          | 1.53 V                   | 323                        | 39.9                   | 8.4                            |
| 8   | 7311.00        | 36.1 AV                       | 54.0              | -17.9          | 1.53 V                   | 323                        | 27.7                   | 8.4                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 100.8 PK                      |                   |                | 1.08 H                   | 95                         | 102.6                  | -1.8                           |
| 2   | *2462.00       | 91.9 AV                       |                   |                | 1.08 H                   | 95                         | 93.7                   | -1.8                           |
| 3   | 2483.50        | 50.5 PK                       | 74.0              | -23.5          | 1.08 H                   | 95                         | 52.2                   | -1.7                           |
| 4   | 2483.50        | 42.1 AV                       | 54.0              | -11.9          | 1.08 H                   | 95                         | 43.8                   | -1.7                           |
| 5   | 4924.00        | 43.5 PK                       | 74.0              | -30.5          | 1.44 H                   | 57                         | 41.1                   | 2.4                            |
| 6   | 4924.00        | 31.8 AV                       | 54.0              | -22.2          | 1.44 H                   | 57                         | 29.4                   | 2.4                            |
| 7   | 7386.00        | 48.0 PK                       | 74.0              | -26.0          | 1.56 H                   | 290                        | 39.5                   | 8.5                            |
| 8   | 7386.00        | 36.2 AV                       | 54.0              | -17.8          | 1.56 H                   | 290                        | 27.7                   | 8.5                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO.      | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|----------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1        | *2462.00       | 110.4 PK                      |                   |                | 2.12 V                   | 20                         | 112.2                  | -1.8                           |
| 2        | *2462.00       | 101.5 AV                      |                   |                | 2.12 V                   | 20                         | 103.3                  | -1.8                           |
| 3        | 2483.50        | 71.7 PK                       | 74.0              | -2.3           | 2.12 V                   | 20                         | 73.4                   | -1.7                           |
| <b>4</b> | <b>2483.50</b> | <b>53.9 AV</b>                | <b>54.0</b>       | <b>-0.1</b>    | <b>2.12 V</b>            | <b>20</b>                  | <b>55.6</b>            | <b>-1.7</b>                    |
| 5        | 4924.00        | 45.6 PK                       | 74.0              | -28.4          | 1.33 V                   | 147                        | 43.2                   | 2.4                            |
| 6        | 4924.00        | 34.3 AV                       | 54.0              | -19.7          | 1.33 V                   | 147                        | 31.9                   | 2.4                            |
| 7        | 7386.00        | 48.8 PK                       | 74.0              | -25.2          | 1.56 V                   | 312                        | 40.3                   | 8.5                            |
| 8        | 7386.00        | 36.4 AV                       | 54.0              | -17.6          | 1.56 V                   | 312                        | 27.9                   | 8.5                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**802.11n (HT40)**

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 3 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 50.6 PK                       | 74.0              | -23.4          | 1.10 H                   | 92                         | 52.7                   | -2.1                           |
| 2   | 2390.00        | 42.1 AV                       | 54.0              | -11.9          | 1.10 H                   | 92                         | 44.2                   | -2.1                           |
| 3   | *2422.00       | 95.1 PK                       |                   |                | 1.10 H                   | 92                         | 97.2                   | -2.1                           |
| 4   | *2422.00       | 86.8 AV                       |                   |                | 1.10 H                   | 92                         | 88.9                   | -2.1                           |
| 5   | 4844.00        | 43.1 PK                       | 74.0              | -30.9          | 1.45 H                   | 43                         | 40.8                   | 2.3                            |
| 6   | 4844.00        | 30.5 AV                       | 54.0              | -23.5          | 1.45 H                   | 43                         | 28.2                   | 2.3                            |
| 7   | 7266.00        | 47.4 PK                       | 74.0              | -26.6          | 1.58 H                   | 277                        | 39.0                   | 8.4                            |
| 8   | 7266.00        | 36.5 AV                       | 54.0              | -17.5          | 1.58 H                   | 277                        | 28.1                   | 8.4                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 70.7 PK                       | 74.0              | -3.3           | 1.00 V                   | 26                         | 72.8                   | -2.1                           |
| 2   | 2390.00        | 53.8 AV                       | 54.0              | -0.2           | 1.00 V                   | 26                         | 55.9                   | -2.1                           |
| 3   | *2422.00       | 104.5 PK                      |                   |                | 1.00 V                   | 26                         | 106.6                  | -2.1                           |
| 4   | *2422.00       | 96.5 AV                       |                   |                | 1.00 V                   | 26                         | 98.6                   | -2.1                           |
| 5   | 4844.00        | 48.0 PK                       | 74.0              | -26.0          | 1.32 V                   | 138                        | 45.7                   | 2.3                            |
| 6   | 4844.00        | 35.4 AV                       | 54.0              | -18.6          | 1.32 V                   | 138                        | 33.1                   | 2.3                            |
| 7   | 7266.00        | 48.1 PK                       | 74.0              | -25.9          | 1.57 V                   | 321                        | 39.7                   | 8.4                            |
| 8   | 7266.00        | 36.8 AV                       | 54.0              | -17.2          | 1.57 V                   | 321                        | 28.4                   | 8.4                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                          |              |
|------------------------|--------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 2390.00     | 50.7 PK                 | 74.0           | -23.3       | 1.11 H             | 99                   | 52.8             | -2.1                     |
| 2   | 2390.00     | 42.6 AV                 | 54.0           | -11.4       | 1.11 H             | 99                   | 44.7             | -2.1                     |
| 3   | *2437.00    | 104.5 PK                |                |             | 1.11 H             | 99                   | 106.4            | -1.9                     |
| 4   | *2437.00    | 92.3 AV                 |                |             | 1.11 H             | 99                   | 94.2             | -1.9                     |
| 5   | 2483.50     | 51.0 PK                 | 74.0           | -23.0       | 1.11 H             | 99                   | 52.7             | -1.7                     |
| 6   | 2483.50     | 43.3 AV                 | 54.0           | -10.7       | 1.11 H             | 99                   | 45.0             | -1.7                     |
| 7   | 4874.00     | 42.8 PK                 | 74.0           | -31.2       | 1.47 H             | 52                   | 40.5             | 2.3                      |
| 8   | 4874.00     | 31.6 AV                 | 54.0           | -22.4       | 1.47 H             | 52                   | 29.3             | 2.3                      |
| 9   | 7311.00     | 46.7 PK                 | 74.0           | -27.3       | 1.57 H             | 265                  | 38.3             | 8.4                      |
| 10  | 7311.00     | 36.3 AV                 | 54.0           | -17.7       | 1.57 H             | 265                  | 27.9             | 8.4                      |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 2390.00     | 68.0 PK                 | 74.0           | -6.0        | 1.36 V             | 311                  | 70.1             | -2.1                     |
| 2   | 2390.00     | 52.8 AV                 | 54.0           | -1.2        | 1.36 V             | 311                  | 54.9             | -2.1                     |
| 3   | *2437.00    | 114.1 PK                |                |             | 1.36 V             | 311                  | 116.0            | -1.9                     |
| 4   | *2437.00    | 102.5 AV                |                |             | 1.36 V             | 311                  | 104.4            | -1.9                     |
| 5   | 2483.50     | 66.9 PK                 | 74.0           | -7.1        | 1.36 V             | 311                  | 68.6             | -1.7                     |
| 6   | 2483.50     | 53.8 AV                 | 54.0           | -0.2        | 1.36 V             | 311                  | 55.5             | -1.7                     |
| 7   | 4874.00     | 49.8 PK                 | 74.0           | -24.2       | 1.35 V             | 131                  | 47.5             | 2.3                      |
| 8   | 4874.00     | 36.9 AV                 | 54.0           | -17.1       | 1.35 V             | 131                  | 34.6             | 2.3                      |
| 9   | 7311.00     | 48.2 PK                 | 74.0           | -25.8       | 1.64 V             | 322                  | 39.8             | 8.4                      |
| 10  | 7311.00     | 37.5 AV                 | 54.0           | -16.5       | 1.64 V             | 322                  | 29.1             | 8.4                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 9 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2452.00       | 95.3 PK                       |                   |                | 1.08 H                   | 80                         | 97.1                   | -1.8                           |
| 2   | *2452.00       | 86.9 AV                       |                   |                | 1.08 H                   | 80                         | 88.7                   | -1.8                           |
| 3   | 2483.50        | 50.6 PK                       | 74.0              | -23.4          | 1.08 H                   | 80                         | 52.3                   | -1.7                           |
| 4   | 2483.50        | 42.2 AV                       | 54.0              | -11.8          | 1.08 H                   | 80                         | 43.9                   | -1.7                           |
| 5   | 4904.00        | 43.0 PK                       | 74.0              | -31.0          | 1.47 H                   | 61                         | 40.6                   | 2.4                            |
| 6   | 4904.00        | 30.8 AV                       | 54.0              | -23.2          | 1.47 H                   | 61                         | 28.4                   | 2.4                            |
| 7   | 7356.00        | 47.2 PK                       | 74.0              | -26.8          | 1.51 H                   | 300                        | 38.7                   | 8.5                            |
| 8   | 7356.00        | 36.3 AV                       | 54.0              | -17.7          | 1.51 H                   | 300                        | 27.8                   | 8.5                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2452.00       | 104.9 PK                      |                   |                | 1.00 V                   | 30                         | 106.7                  | -1.8                           |
| 2   | *2452.00       | 96.6 AV                       |                   |                | 1.00 V                   | 30                         | 98.4                   | -1.8                           |
| 3   | 2483.50        | 71.3 PK                       | 74.0              | -2.7           | 1.00 V                   | 30                         | 73.0                   | -1.7                           |
| 4   | 2483.50        | 51.0 AV                       | 54.0              | -3.0           | 1.00 V                   | 30                         | 52.7                   | -1.7                           |
| 5   | 4904.00        | 48.3 PK                       | 74.0              | -25.7          | 1.34 V                   | 127                        | 45.9                   | 2.4                            |
| 6   | 4904.00        | 35.7 AV                       | 54.0              | -18.3          | 1.34 V                   | 127                        | 33.3                   | 2.4                            |
| 7   | 7356.00        | 47.9 PK                       | 74.0              | -26.1          | 1.59 V                   | 310                        | 39.4                   | 8.5                            |
| 8   | 7356.00        | 36.5 AV                       | 54.0              | -17.5          | 1.59 V                   | 310                        | 28.0                   | 8.5                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

## 4.1.8 Test Results (Mode 2)

## Above 1GHz Data :

## 802.11b

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2374.00        | 48.6 PK                       | 74.0              | -25.4          | 2.71 H                   | 79                         | 50.8                   | -2.2                           |
| 2   | 2374.00        | 41.3 AV                       | 54.0              | -12.7          | 2.71 H                   | 79                         | 43.5                   | -2.2                           |
| 3   | 2386.00        | 49.5 PK                       | 74.0              | -24.5          | 2.71 H                   | 79                         | 51.6                   | -2.1                           |
| 4   | 2386.00        | 41.8 AV                       | 54.0              | -12.2          | 2.71 H                   | 79                         | 43.9                   | -2.1                           |
| 5   | *2412.00       | 112.2 PK                      |                   |                | 2.71 H                   | 79                         | 114.2                  | -2.0                           |
| 6   | *2412.00       | 108.4 AV                      |                   |                | 2.71 H                   | 79                         | 110.4                  | -2.0                           |
| 7   | 4824.00        | 46.1 PK                       | 74.0              | -27.9          | 1.08 H                   | 20                         | 43.9                   | 2.2                            |
| 8   | 4824.00        | 40.8 AV                       | 54.0              | -13.2          | 1.08 H                   | 20                         | 38.6                   | 2.2                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2374.00        | 59.6 PK                       | 74.0              | -14.4          | 1.00 V                   | 130                        | 61.8                   | -2.2                           |
| 2   | 2374.00        | 52.5 AV                       | 54.0              | -1.5           | 1.00 V                   | 130                        | 54.7                   | -2.2                           |
| 3   | 2386.00        | 60.6 PK                       | 74.0              | -13.4          | 1.00 V                   | 130                        | 62.7                   | -2.1                           |
| 4   | 2386.00        | 53.0 AV                       | 54.0              | -1.0           | 1.00 V                   | 130                        | 55.1                   | -2.1                           |
| 5   | *2412.00       | 120.4 PK                      |                   |                | 1.00 V                   | 130                        | 122.4                  | -2.0                           |
| 6   | *2412.00       | 118.3 AV                      |                   |                | 1.00 V                   | 130                        | 120.3                  | -2.0                           |
| 7   | 4824.00        | 48.3 PK                       | 74.0              | -25.7          | 1.00 V                   | 118                        | 46.1                   | 2.2                            |
| 8   | 4824.00        | 43.5 AV                       | 54.0              | -10.5          | 1.00 V                   | 118                        | 41.3                   | 2.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 47.2 PK                       | 74.0              | -26.8          | 2.66 H                   | 75                         | 49.3                   | -2.1                           |
| 2   | 2390.00        | 38.1 AV                       | 54.0              | -15.9          | 2.66 H                   | 75                         | 40.2                   | -2.1                           |
| 3   | *2437.00       | 114.4 PK                      |                   |                | 2.66 H                   | 75                         | 116.3                  | -1.9                           |
| 4   | *2437.00       | 110.6 AV                      |                   |                | 2.66 H                   | 75                         | 112.5                  | -1.9                           |
| 5   | 2483.50        | 50.4 PK                       | 74.0              | -23.6          | 2.66 H                   | 75                         | 52.1                   | -1.7                           |
| 6   | 2483.50        | 42.4 AV                       | 54.0              | -11.6          | 2.66 H                   | 75                         | 44.1                   | -1.7                           |
| 7   | 4874.00        | 46.2 PK                       | 74.0              | -27.8          | 1.00 H                   | 18                         | 43.9                   | 2.3                            |
| 8   | 4874.00        | 40.9 AV                       | 54.0              | -13.1          | 1.00 H                   | 18                         | 38.6                   | 2.3                            |
| 9   | 7311.00        | 48.3 PK                       | 74.0              | -25.7          | 1.56 H                   | 325                        | 39.9                   | 8.4                            |
| 10  | 7311.00        | 35.3 AV                       | 54.0              | -18.7          | 1.56 H                   | 325                        | 26.9                   | 8.4                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO.      | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|----------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1        | 2390.00        | 58.9 PK                       | 74.0              | -15.1          | 1.00 V                   | 131                        | 61.0                   | -2.1                           |
| 2        | 2390.00        | 49.8 AV                       | 54.0              | -4.2           | 1.00 V                   | 131                        | 51.9                   | -2.1                           |
| 3        | *2437.00       | 122.7 PK                      |                   |                | 1.00 V                   | 131                        | 124.6                  | -1.9                           |
| 4        | *2437.00       | 120.7 AV                      |                   |                | 1.00 V                   | 131                        | 122.6                  | -1.9                           |
| 5        | 2483.50        | 61.8 PK                       | 74.0              | -12.2          | 1.00 V                   | 131                        | 63.5                   | -1.7                           |
| <b>6</b> | <b>2483.50</b> | <b>53.9 AV</b>                | <b>54.0</b>       | <b>-0.1</b>    | <b>1.00 V</b>            | <b>131</b>                 | <b>55.6</b>            | <b>-1.7</b>                    |
| 7        | 4874.00        | 49.8 PK                       | 74.0              | -24.2          | 1.00 V                   | 123                        | 47.5                   | 2.3                            |
| 8        | 4874.00        | 46.3 AV                       | 54.0              | -7.7           | 1.00 V                   | 123                        | 44.0                   | 2.3                            |
| 9        | 7311.00        | 48.1 PK                       | 74.0              | -25.9          | 1.00 V                   | 338                        | 39.7                   | 8.4                            |
| 10       | 7311.00        | 36.4 AV                       | 54.0              | -17.6          | 1.00 V                   | 338                        | 28.0                   | 8.4                            |

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 111.1 PK                      |                   |                | 2.68 H                   | 72                         | 112.9                  | -1.8                           |
| 2   | *2462.00       | 107.3 AV                      |                   |                | 2.68 H                   | 72                         | 109.1                  | -1.8                           |
| 3   | 2483.50        | 49.7 PK                       | 74.0              | -24.3          | 2.68 H                   | 72                         | 51.4                   | -1.7                           |
| 4   | 2483.50        | 42.1 AV                       | 54.0              | -11.9          | 2.68 H                   | 72                         | 43.8                   | -1.7                           |
| 5   | 4924.00        | 46.8 PK                       | 74.0              | -27.2          | 1.03 H                   | 9                          | 44.4                   | 2.4                            |
| 6   | 4924.00        | 40.4 AV                       | 54.0              | -13.6          | 1.03 H                   | 9                          | 38.0                   | 2.4                            |
| 7   | 7386.00        | 48.5 PK                       | 74.0              | -25.5          | 1.51 H                   | 333                        | 40.0                   | 8.5                            |
| 8   | 7386.00        | 34.7 AV                       | 54.0              | -19.3          | 1.51 H                   | 333                        | 26.2                   | 8.5                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 119.2 PK                      |                   |                | 1.00 V                   | 113                        | 121.0                  | -1.8                           |
| 2   | *2462.00       | 117.1 AV                      |                   |                | 1.00 V                   | 113                        | 118.9                  | -1.8                           |
| 3   | 2483.50        | 60.9 PK                       | 74.0              | -13.1          | 1.00 V                   | 113                        | 62.6                   | -1.7                           |
| 4   | 2483.50        | 53.2 AV                       | 54.0              | -0.8           | 1.00 V                   | 113                        | 54.9                   | -1.7                           |
| 5   | 4924.00        | 48.6 PK                       | 74.0              | -25.4          | 1.09 V                   | 113                        | 46.2                   | 2.4                            |
| 6   | 4924.00        | 43.8 AV                       | 54.0              | -10.2          | 1.09 V                   | 113                        | 41.4                   | 2.4                            |
| 7   | 7386.00        | 47.6 PK                       | 74.0              | -26.4          | 1.05 V                   | 345                        | 39.1                   | 8.5                            |
| 8   | 7386.00        | 36.2 AV                       | 54.0              | -17.8          | 1.05 V                   | 345                        | 27.7                   | 8.5                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11g**

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 49.7 PK                       | 74.0              | -24.3          | 2.63 H                   | 68                         | 51.8                   | -2.1                           |
| 2   | 2390.00        | 42.1 AV                       | 54.0              | -11.9          | 2.63 H                   | 68                         | 44.2                   | -2.1                           |
| 3   | *2412.00       | 111.7 PK                      |                   |                | 2.63 H                   | 68                         | 113.7                  | -2.0                           |
| 4   | *2412.00       | 100.7 AV                      |                   |                | 2.63 H                   | 68                         | 102.7                  | -2.0                           |
| 5   | 4824.00        | 42.9 PK                       | 74.0              | -31.1          | 1.01 H                   | 19                         | 40.7                   | 2.2                            |
| 6   | 4824.00        | 31.9 AV                       | 54.0              | -22.1          | 1.01 H                   | 19                         | 29.7                   | 2.2                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO.      | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|----------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1        | 2390.00        | 69.4 PK                       | 74.0              | -4.6           | 1.00 V                   | 132                        | 71.5                   | -2.1                           |
| <b>2</b> | <b>2390.00</b> | <b>53.9 AV</b>                | <b>54.0</b>       | <b>-0.1</b>    | <b>1.00 V</b>            | <b>132</b>                 | <b>56.0</b>            | <b>-2.1</b>                    |
| 3        | *2412.00       | 118.9 PK                      |                   |                | 1.00 V                   | 132                        | 120.9                  | -2.0                           |
| 4        | *2412.00       | 109.3 AV                      |                   |                | 1.00 V                   | 132                        | 111.3                  | -2.0                           |
| 5        | 4824.00        | 46.8 PK                       | 74.0              | -27.2          | 1.00 V                   | 139                        | 44.6                   | 2.2                            |
| 6        | 4824.00        | 34.8 AV                       | 54.0              | -19.2          | 1.00 V                   | 139                        | 32.6                   | 2.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                          |              |
|------------------------|--------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 112.0 PK                |                |             | 2.67 H             | 78                   | 113.9            | -1.9                     |
| 2   | *2437.00    | 100.9 AV                |                |             | 2.67 H             | 78                   | 102.8            | -1.9                     |
| 3   | 2483.50     | 50.2 PK                 | 74.0           | -23.8       | 2.67 H             | 78                   | 51.9             | -1.7                     |
| 4   | 2483.50     | 42.1 AV                 | 54.0           | -11.9       | 2.67 H             | 78                   | 43.8             | -1.7                     |
| 5   | 4817.00     | 46.7 PK                 | 74.0           | -27.3       | 2.67 H             | 78                   | 44.5             | 2.2                      |
| 6   | 4817.00     | 37.8 AV                 | 54.0           | -16.2       | 2.67 H             | 78                   | 35.6             | 2.2                      |
| 7   | 4874.00     | 43.1 PK                 | 74.0           | -30.9       | 1.00 H             | 17                   | 40.8             | 2.3                      |
| 8   | 4874.00     | 32.0 AV                 | 54.0           | -22.0       | 1.00 H             | 17                   | 29.7             | 2.3                      |
| 9   | 7311.00     | 47.0 PK                 | 74.0           | -27.0       | 2.06 H             | 26                   | 38.6             | 8.4                      |
| 10  | 7311.00     | 36.4 AV                 | 54.0           | -17.6       | 2.06 H             | 26                   | 28.0             | 8.4                      |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 125.3 PK                |                |             | 1.00 V             | 122                  | 127.2            | -1.9                     |
| 2   | *2437.00    | 115.4 AV                |                |             | 1.00 V             | 122                  | 117.3            | -1.9                     |
| 3   | 2483.50     | 69.9 PK                 | 74.0           | -4.1        | 1.00 V             | 122                  | 71.6             | -1.7                     |
| 4   | 2483.50     | 52.2 AV                 | 54.0           | -1.8        | 1.00 V             | 122                  | 53.9             | -1.7                     |
| 5   | 4817.00     | 63.7 PK                 | 74.0           | -10.3       | 1.00 V             | 122                  | 61.5             | 2.2                      |
| 6   | 4817.00     | 48.6 AV                 | 54.0           | -5.4        | 1.00 V             | 122                  | 46.4             | 2.2                      |
| 7   | 4874.00     | 47.6 PK                 | 74.0           | -26.4       | 1.00 V             | 138                  | 45.3             | 2.3                      |
| 8   | 4874.00     | 35.5 AV                 | 54.0           | -18.5       | 1.00 V             | 138                  | 33.2             | 2.3                      |
| 9   | 7311.00     | 47.2 PK                 | 74.0           | -26.8       | 1.59 V             | 182                  | 38.8             | 8.4                      |
| 10  | 7311.00     | 36.7 AV                 | 54.0           | -17.3       | 1.59 V             | 182                  | 28.3             | 8.4                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 111.7 PK                      |                   |                | 2.72 H                   | 78                         | 113.5                  | -1.8                           |
| 2   | *2462.00       | 100.7 AV                      |                   |                | 2.72 H                   | 78                         | 102.5                  | -1.8                           |
| 3   | 2483.50        | 49.5 PK                       | 74.0              | -24.5          | 2.72 H                   | 78                         | 51.2                   | -1.7                           |
| 4   | 2483.50        | 42.0 AV                       | 54.0              | -12.0          | 2.72 H                   | 78                         | 43.7                   | -1.7                           |
| 5   | 4924.00        | 42.1 PK                       | 74.0              | -31.9          | 1.00 H                   | 3                          | 39.7                   | 2.4                            |
| 6   | 4924.00        | 31.5 AV                       | 54.0              | -22.5          | 1.00 H                   | 3                          | 29.1                   | 2.4                            |
| 7   | 7386.00        | 46.6 PK                       | 74.0              | -27.4          | 2.05 H                   | 31                         | 38.1                   | 8.5                            |
| 8   | 7386.00        | 36.0 AV                       | 54.0              | -18.0          | 2.05 H                   | 31                         | 27.5                   | 8.5                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 118.4 PK                      |                   |                | 1.00 V                   | 130                        | 120.2                  | -1.8                           |
| 2   | *2462.00       | 109.2 AV                      |                   |                | 1.00 V                   | 130                        | 111.0                  | -1.8                           |
| 3   | 2483.50        | 73.6 PK                       | 74.0              | -0.4           | 1.00 V                   | 130                        | 75.3                   | -1.7                           |
| 4   | 2483.50        | 52.6 AV                       | 54.0              | -1.4           | 1.00 V                   | 130                        | 54.3                   | -1.7                           |
| 5   | 4924.00        | 46.5 PK                       | 74.0              | -27.5          | 1.00 V                   | 151                        | 44.1                   | 2.4                            |
| 6   | 4924.00        | 34.2 AV                       | 54.0              | -19.8          | 1.00 V                   | 151                        | 31.8                   | 2.4                            |
| 7   | 7386.00        | 46.7 PK                       | 74.0              | -27.3          | 1.58 V                   | 177                        | 38.2                   | 8.5                            |
| 8   | 7386.00        | 36.4 AV                       | 54.0              | -17.6          | 1.58 V                   | 177                        | 27.9                   | 8.5                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 1 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 50.8 PK                       | 74.0              | -23.2          | 2.73 H                   | 68                         | 52.9                   | -2.1                           |
| 2   | 2390.00        | 42.5 AV                       | 54.0              | -11.5          | 2.73 H                   | 68                         | 44.6                   | -2.1                           |
| 3   | *2412.00       | 103.7 PK                      |                   |                | 2.73 H                   | 68                         | 105.7                  | -2.0                           |
| 4   | *2412.00       | 92.2 AV                       |                   |                | 2.73 H                   | 68                         | 94.2                   | -2.0                           |
| 5   | 4824.00        | 42.3 PK                       | 74.0              | -31.7          | 1.01 H                   | 44                         | 40.1                   | 2.2                            |
| 6   | 4824.00        | 30.4 AV                       | 54.0              | -23.6          | 1.01 H                   | 44                         | 28.2                   | 2.2                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 69.0 PK                       | 74.0              | -5.0           | 1.00 V                   | 128                        | 71.1                   | -2.1                           |
| 2   | 2390.00        | 53.6 AV                       | 54.0              | -0.4           | 1.00 V                   | 128                        | 55.7                   | -2.1                           |
| 3   | *2412.00       | 110.8 PK                      |                   |                | 1.00 V                   | 128                        | 112.8                  | -2.0                           |
| 4   | *2412.00       | 100.5 AV                      |                   |                | 1.00 V                   | 128                        | 102.5                  | -2.0                           |
| 5   | 4824.00        | 47.1 PK                       | 74.0              | -26.9          | 1.07 V                   | 163                        | 44.9                   | 2.2                            |
| 6   | 4824.00        | 34.8 AV                       | 54.0              | -19.2          | 1.07 V                   | 163                        | 32.6                   | 2.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2437.00       | 109.0 PK                      |                   |                | 2.65 H                   | 56                         | 110.9                  | -1.9                           |
| 2   | *2437.00       | 97.8 AV                       |                   |                | 2.65 H                   | 56                         | 99.7                   | -1.9                           |
| 3   | 2483.50        | 50.2 PK                       | 74.0              | -23.8          | 2.65 H                   | 56                         | 51.9                   | -1.7                           |
| 4   | 2483.50        | 42.3 AV                       | 54.0              | -11.7          | 2.65 H                   | 56                         | 44.0                   | -1.7                           |
| 5   | 4874.00        | 43.1 PK                       | 74.0              | -30.9          | 1.00 H                   | 28                         | 40.8                   | 2.3                            |
| 6   | 4874.00        | 31.8 AV                       | 54.0              | -22.2          | 1.00 H                   | 28                         | 29.5                   | 2.3                            |
| 7   | 7311.00        | 47.7 PK                       | 74.0              | -26.3          | 2.10 H                   | 40                         | 39.3                   | 8.4                            |
| 8   | 7311.00        | 36.8 AV                       | 54.0              | -17.2          | 2.10 H                   | 40                         | 28.4                   | 8.4                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO.      | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|----------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1        | *2437.00       | 116.0 PK                      |                   |                | 1.00 V                   | 133                        | 117.9                  | -1.9                           |
| 2        | *2437.00       | 106.1 AV                      |                   |                | 1.00 V                   | 133                        | 108.0                  | -1.9                           |
| 3        | 2483.50        | 70.7 PK                       | 74.0              | -3.3           | 1.00 V                   | 133                        | 72.4                   | -1.7                           |
| <b>4</b> | <b>2483.50</b> | <b>53.9 AV</b>                | <b>54.0</b>       | <b>-0.1</b>    | <b>1.00 V</b>            | <b>133</b>                 | <b>55.6</b>            | <b>-1.7</b>                    |
| 5        | 4874.00        | 47.2 PK                       | 74.0              | -26.8          | 1.01 V                   | 152                        | 44.9                   | 2.3                            |
| 6        | 4874.00        | 35.1 AV                       | 54.0              | -18.9          | 1.01 V                   | 152                        | 32.8                   | 2.3                            |
| 7        | 7311.00        | 47.2 PK                       | 74.0              | -26.8          | 1.61 V                   | 192                        | 38.8                   | 8.4                            |
| 8        | 7311.00        | 37.0 AV                       | 54.0              | -17.0          | 1.61 V                   | 192                        | 28.6                   | 8.4                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |               |                              |              |
|------------------------|---------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 11 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz  |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 102.8 PK                      |                   |                | 2.79 H                   | 77                         | 104.6                  | -1.8                           |
| 2   | *2462.00       | 92.0 AV                       |                   |                | 2.79 H                   | 77                         | 93.8                   | -1.8                           |
| 3   | 2483.50        | 50.3 PK                       | 74.0              | -23.7          | 2.79 H                   | 77                         | 52.0                   | -1.7                           |
| 4   | 2483.50        | 41.9 AV                       | 54.0              | -12.1          | 2.79 H                   | 77                         | 43.6                   | -1.7                           |
| 5   | 4924.00        | 42.8 PK                       | 74.0              | -31.2          | 1.06 H                   | 28                         | 40.4                   | 2.4                            |
| 6   | 4924.00        | 30.9 AV                       | 54.0              | -23.1          | 1.06 H                   | 28                         | 28.5                   | 2.4                            |
| 7   | 7386.00        | 47.3 PK                       | 74.0              | -26.7          | 2.05 H                   | 14                         | 38.8                   | 8.5                            |
| 8   | 7386.00        | 36.9 AV                       | 54.0              | -17.1          | 2.05 H                   | 14                         | 28.4                   | 8.5                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2462.00       | 109.8 PK                      |                   |                | 1.00 V                   | 131                        | 111.6                  | -1.8                           |
| 2   | *2462.00       | 100.1 AV                      |                   |                | 1.00 V                   | 131                        | 101.9                  | -1.8                           |
| 3   | 2483.50        | 71.2 PK                       | 74.0              | -2.8           | 1.00 V                   | 131                        | 72.9                   | -1.7                           |
| 4   | 2483.50        | 53.7 AV                       | 54.0              | -0.3           | 1.00 V                   | 131                        | 55.4                   | -1.7                           |
| 5   | 4924.00        | 48.3 PK                       | 74.0              | -25.7          | 1.00 V                   | 150                        | 45.9                   | 2.4                            |
| 6   | 4924.00        | 36.0 AV                       | 54.0              | -18.0          | 1.00 V                   | 150                        | 33.6                   | 2.4                            |
| 7   | 7386.00        | 47.1 PK                       | 74.0              | -26.9          | 1.55 V                   | 188                        | 38.6                   | 8.5                            |
| 8   | 7386.00        | 36.6 AV                       | 54.0              | -17.4          | 1.55 V                   | 188                        | 28.1                   | 8.5                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT40)

|                        |              |                          |              |
|------------------------|--------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 3 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                          | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 2390.00     | 50.0 PK                 | 74.0           | -24.0       | 2.79 H             | 75                   | 52.1             | -2.1                     |
| 2   | 2390.00     | 41.5 AV                 | 54.0           | -12.5       | 2.79 H             | 75                   | 43.6             | -2.1                     |
| 3   | *2422.00    | 98.8 PK                 |                |             | 2.79 H             | 75                   | 100.9            | -2.1                     |
| 4   | *2422.00    | 89.4 AV                 |                |             | 2.79 H             | 75                   | 91.5             | -2.1                     |
| 5   | 4844.00     | 42.8 PK                 | 74.0           | -31.2       | 1.03 H             | 30                   | 40.5             | 2.3                      |
| 6   | 4844.00     | 30.4 AV                 | 54.0           | -23.6       | 1.03 H             | 30                   | 28.1             | 2.3                      |
| 7   | 7266.00     | 47.3 PK                 | 74.0           | -26.7       | 2.01 H             | 22                   | 38.9             | 8.4                      |
| 8   | 7266.00     | 36.6 AV                 | 54.0           | -17.4       | 2.01 H             | 22                   | 28.2             | 8.4                      |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 2390.00     | 69.3 PK                 | 74.0           | -4.7        | 1.00 V             | 193                  | 71.4             | -2.1                     |
| 2   | 2390.00     | 53.7 AV                 | 54.0           | -0.3        | 1.00 V             | 193                  | 55.8             | -2.1                     |
| 3   | *2422.00    | 105.1 PK                |                |             | 1.00 V             | 193                  | 107.2            | -2.1                     |
| 4   | *2422.00    | 96.9 AV                 |                |             | 1.00 V             | 193                  | 99.0             | -2.1                     |
| 5   | 4844.00     | 47.4 PK                 | 74.0           | -26.6       | 1.00 V             | 132                  | 45.1             | 2.3                      |
| 6   | 4844.00     | 35.1 AV                 | 54.0           | -18.9       | 1.00 V             | 132                  | 32.8             | 2.3                      |
| 7   | 7266.00     | 46.9 PK                 | 74.0           | -27.1       | 1.60 V             | 177                  | 38.5             | 8.4                      |
| 8   | 7266.00     | 36.6 AV                 | 54.0           | -17.4       | 1.60 V             | 177                  | 28.2             | 8.4                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                              |              |
|------------------------|--------------|------------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                              | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2437.00       | 101.0 PK                      |                   |                | 2.85 H                   | 74                         | 102.9                  | -1.9                           |
| 2   | *2437.00       | 91.4 AV                       |                   |                | 2.85 H                   | 74                         | 93.3                   | -1.9                           |
| 3   | 2483.50        | 50.5 PK                       | 74.0              | -23.5          | 2.85 H                   | 74                         | 52.2                   | -1.7                           |
| 4   | 2483.50        | 42.8 AV                       | 54.0              | -11.2          | 2.85 H                   | 74                         | 44.5                   | -1.7                           |
| 5   | 4874.00        | 42.8 PK                       | 74.0              | -31.2          | 1.05 H                   | 3                          | 40.5                   | 2.3                            |
| 6   | 4874.00        | 31.7 AV                       | 54.0              | -22.3          | 1.05 H                   | 3                          | 29.4                   | 2.3                            |
| 7   | 7311.00        | 46.5 PK                       | 74.0              | -27.5          | 2.03 H                   | 37                         | 38.1                   | 8.4                            |
| 8   | 7311.00        | 36.1 AV                       | 54.0              | -17.9          | 2.03 H                   | 37                         | 27.7                   | 8.4                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *2437.00       | 107.6 PK                      |                   |                | 1.00 V                   | 192                        | 109.5                  | -1.9                           |
| 2   | *2437.00       | 99.2 AV                       |                   |                | 1.00 V                   | 192                        | 101.1                  | -1.9                           |
| 3   | 2483.50        | 68.7 PK                       | 74.0              | -5.3           | 1.00 V                   | 192                        | 70.4                   | -1.7                           |
| 4   | 2483.50        | 53.7 AV                       | 54.0              | -0.3           | 1.00 V                   | 192                        | 55.4                   | -1.7                           |
| 5   | 4874.00        | 47.6 PK                       | 74.0              | -26.4          | 1.00 V                   | 154                        | 45.3                   | 2.3                            |
| 6   | 4874.00        | 35.8 AV                       | 54.0              | -18.2          | 1.00 V                   | 154                        | 33.5                   | 2.3                            |
| 7   | 7311.00        | 46.8 PK                       | 74.0              | -27.2          | 1.53 V                   | 191                        | 38.4                   | 8.4                            |
| 8   | 7311.00        | 36.5 AV                       | 54.0              | -17.5          | 1.53 V                   | 191                        | 28.1                   | 8.4                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

|                        |              |                          |              |
|------------------------|--------------|--------------------------|--------------|
| <b>CHANNEL</b>         | TX Channel 9 | <b>DETECTOR FUNCTION</b> | Peak (PK)    |
| <b>FREQUENCY RANGE</b> | 1GHz ~ 25GHz |                          | Average (AV) |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2452.00    | 99.8 PK                 |                |             | 2.81 H             | 84                   | 101.6            | -1.8                     |
| 2   | *2452.00    | 89.9 AV                 |                |             | 2.81 H             | 84                   | 91.7             | -1.8                     |
| 3   | 2483.50     | 50.1 PK                 | 74.0           | -23.9       | 2.81 H             | 84                   | 51.8             | -1.7                     |
| 4   | 2483.50     | 42.1 AV                 | 54.0           | -11.9       | 2.81 H             | 84                   | 43.8             | -1.7                     |
| 5   | 4904.00     | 43.4 PK                 | 74.0           | -30.6       | 1.00 H             | 13                   | 41.0             | 2.4                      |
| 6   | 4904.00     | 30.9 AV                 | 54.0           | -23.1       | 1.00 H             | 13                   | 28.5             | 2.4                      |
| 7   | 7356.00     | 46.6 PK                 | 74.0           | -27.4       | 2.00 H             | 37                   | 38.1             | 8.5                      |
| 8   | 7356.00     | 35.9 AV                 | 54.0           | -18.1       | 2.00 H             | 37                   | 27.4             | 8.5                      |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2452.00    | 105.3 PK                |                |             | 1.00 V             | 192                  | 107.1            | -1.8                     |
| 2   | *2452.00    | 97.0 AV                 |                |             | 1.00 V             | 192                  | 98.8             | -1.8                     |
| 3   | 2483.50     | 72.5 PK                 | 74.0           | -1.5        | 1.00 V             | 192                  | 74.2             | -1.7                     |
| 4   | 2483.50     | 53.5 AV                 | 54.0           | -0.5        | 1.00 V             | 192                  | 55.2             | -1.7                     |
| 5   | 4904.00     | 47.6 PK                 | 74.0           | -26.4       | 1.03 V             | 123                  | 45.2             | 2.4                      |
| 6   | 4904.00     | 35.4 AV                 | 54.0           | -18.6       | 1.03 V             | 123                  | 33.0             | 2.4                      |
| 7   | 7356.00     | 47.7 PK                 | 74.0           | -26.3       | 1.65 V             | 183                  | 39.2             | 8.5                      |
| 8   | 7356.00     | 37.1 AV                 | 54.0           | -16.9       | 1.65 V             | 183                  | 28.6             | 8.5                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**Below 1GHz Data:**

**802.11b**

|                        |              |                              |                 |
|------------------------|--------------|------------------------------|-----------------|
| <b>CHANNEL</b>         | TX Channel 6 | <b>DETECTOR<br/>FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 9kHz ~ 1GHz  |                              |                 |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 82.09          | 28.4 QP                       | 40.0              | -11.6          | 2.00 H                   | 95                         | 42.4                   | -14.0                          |
| 2   | 108.81         | 32.3 QP                       | 43.5              | -11.2          | 3.00 H                   | 117                        | 43.8                   | -11.5                          |
| 3   | 147.47         | 33.0 QP                       | 43.5              | -10.5          | 2.00 H                   | 282                        | 41.5                   | -8.5                           |
| 4   | 250.02         | 27.8 QP                       | 46.0              | -18.2          | 1.00 H                   | 54                         | 37.8                   | -10.0                          |
| 5   | 500.04         | 31.9 QP                       | 46.0              | -14.1          | 1.00 H                   | 329                        | 34.6                   | -2.7                           |
| 6   | 750.01         | 32.1 QP                       | 46.0              | -13.9          | 2.00 H                   | 262                        | 30.2                   | 1.9                            |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 51.83          | 31.9 QP                       | 40.0              | -8.1           | 1.00 V                   | 138                        | 40.7                   | -8.8                           |
| 2   | 97.80          | 29.4 QP                       | 43.5              | -14.1          | 1.00 V                   | 259                        | 42.7                   | -13.3                          |
| 3   | 106.78         | 34.1 QP                       | 43.5              | -9.4           | 1.00 V                   | 167                        | 45.9                   | -11.8                          |
| 4   | 147.44         | 31.3 QP                       | 43.5              | -12.2          | 2.00 V                   | 360                        | 39.8                   | -8.5                           |
| 5   | 500.01         | 33.5 QP                       | 46.0              | -12.5          | 2.00 V                   | 360                        | 36.2                   | -2.7                           |
| 6   | 750.03         | 30.3 QP                       | 46.0              | -15.7          | 2.00 V                   | 216                        | 28.4                   | 1.9                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBUV) |         |
|-----------------|------------------------|---------|
|                 | Quasi-peak             | Average |
| 0.15 - 0.5      | 66 - 56                | 56 - 46 |
| 0.50 - 5.0      | 56                     | 46      |
| 5.0 - 30.0      | 60                     | 50      |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

| DESCRIPTION & MANUFACTURER   | MODEL NO.               | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|-------------------------|------------|-----------------|------------------|
| Test Receiver<br>R&S   | ESCS 30                 | 847124/029 | Oct. 24, 2016   | Oct. 23, 2017    |
| Line-Impedance<br>Stabilization Network<br>(for EUT)<br>R&S        | ESH3-Z5                 | 848773/004 | Oct. 26, 2016   | Oct. 25, 2017    |
| Line-Impedance<br>Stabilization Network<br>(for Peripheral)<br>R&S | ENV216                  | 100072     | June 13, 2016   | June 12, 2017    |
| 50 ohms Terminator   | N/A                     | EMC-02     | Sep. 29, 2016   | Sep. 28, 2017    |
| RF Cable   | 5D-FB                   | COCCAB-001 | Sep. 30, 2016   | Sep. 29, 2017    |
| 10 dB PAD<br>Mini-Circuits   | HAT-10+                 | CONATT-004 | June 20, 2016   | June 19, 2017    |
| Software<br>BVADT  | BVADT_Cond_<br>V7.3.7.4 | NA         | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: Mar. 20, 2017

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

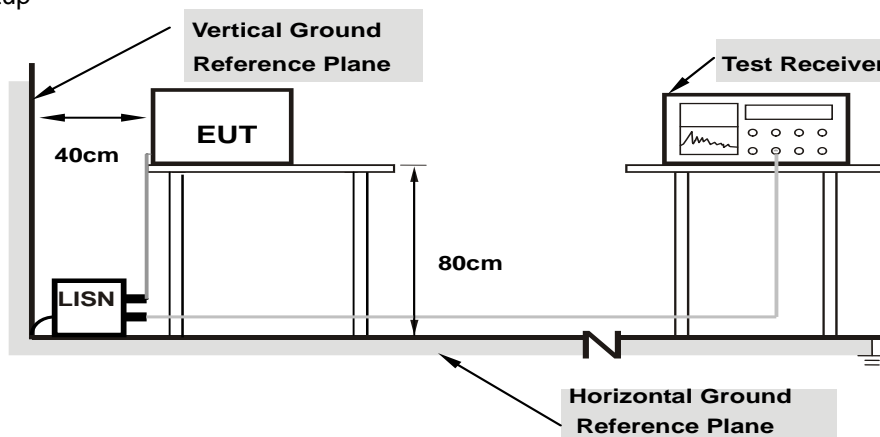

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results (Mode 2)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| Phase Of Power : Line (L) |                 |                        |                      |              |                       |              |              |              |               |              |
|---------------------------|-----------------|------------------------|----------------------|--------------|-----------------------|--------------|--------------|--------------|---------------|--------------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |              | Emission Level (dBuV) |              | Limit (dBuV) |              | Margin (dB)   |              |
|                           |                 |                        | Q.P.                 | AV.          | Q.P.                  | AV.          | Q.P.         | AV.          | Q.P.          | AV.          |
| 1                         | 0.15781         | 10.20                  | 32.87                | 21.85        | 43.07                 | 32.05        | 65.58        | 55.58        | -22.51        | -23.53       |
| 2                         | 0.25547         | 10.21                  | 23.42                | 8.14         | 33.63                 | 18.35        | 61.58        | 51.58        | -27.95        | -33.23       |
| 3                         | 0.33750         | 10.23                  | 29.70                | 19.78        | 39.93                 | 30.01        | 59.26        | 49.26        | -19.33        | -19.25       |
| <b>4</b>                  | <b>0.41953</b>  | <b>10.24</b>           | <b>34.17</b>         | <b>27.38</b> | <b>44.41</b>          | <b>37.62</b> | <b>57.46</b> | <b>47.46</b> | <b>-13.05</b> | <b>-9.84</b> |
| 5                         | 3.91406         | 10.31                  | 21.36                | 15.48        | 31.67                 | 25.79        | 56.00        | 46.00        | -24.33        | -20.21       |
| 6                         | 7.82813         | 10.58                  | 22.04                | 16.37        | 32.62                 | 26.95        | 60.00        | 50.00        | -27.38        | -23.05       |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

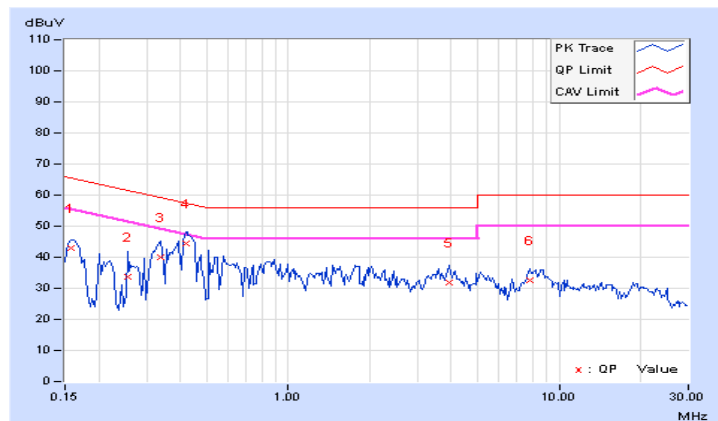


|       |             |                   |                                |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.15781         | 10.19                  | 33.29                | 21.42 | 43.48                 | 31.61 | 65.58        | 55.58 | -22.10      | -23.97 |
| 2                            | 0.26328         | 10.19                  | 24.43                | 14.34 | 34.62                 | 24.53 | 61.33        | 51.33 | -26.71      | -26.80 |
| 3                            | 0.39219         | 10.24                  | 25.58                | 16.13 | 35.82                 | 26.37 | 58.02        | 48.02 | -22.20      | -21.65 |
| 4                            | 0.41563         | 10.24                  | 28.96                | 21.06 | 39.20                 | 31.30 | 57.54        | 47.54 | -18.34      | -16.24 |
| 5                            | 4.11719         | 10.23                  | 20.29                | 12.01 | 30.52                 | 22.24 | 56.00        | 46.00 | -25.48      | -23.76 |
| 6                            | 9.35156         | 10.59                  | 15.76                | 9.89  | 26.35                 | 20.48 | 60.00        | 50.00 | -33.65      | -29.52 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

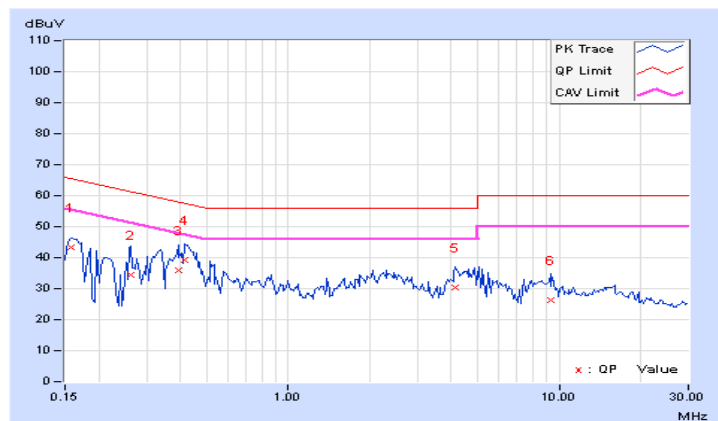


#### 4.2.8 Test Results (Mode 3)

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| Phase Of Power : Line (L) |                 |                        |                      |       |                       |       |              |       |             |        |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                           |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                         | 0.16172         | 10.20                  | 42.31                | 29.30 | 52.51                 | 39.50 | 65.38        | 55.38 | -12.87      | -15.88 |
| 2                         | 0.19687         | 10.20                  | 32.13                | 8.88  | 42.33                 | 19.08 | 63.74        | 53.74 | -21.41      | -34.66 |
| 3                         | 0.41172         | 10.24                  | 28.48                | 19.64 | 38.72                 | 29.88 | 57.61        | 47.61 | -18.89      | -17.73 |
| 4                         | 0.50547         | 10.25                  | 24.79                | 16.79 | 35.04                 | 27.04 | 56.00        | 46.00 | -20.96      | -18.96 |
| 5                         | 7.18359         | 10.53                  | 29.80                | 23.90 | 40.33                 | 34.43 | 60.00        | 50.00 | -19.67      | -15.57 |
| 6                         | 12.92969        | 11.06                  | 27.61                | 21.85 | 38.67                 | 32.91 | 60.00        | 50.00 | -21.33      | -17.09 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

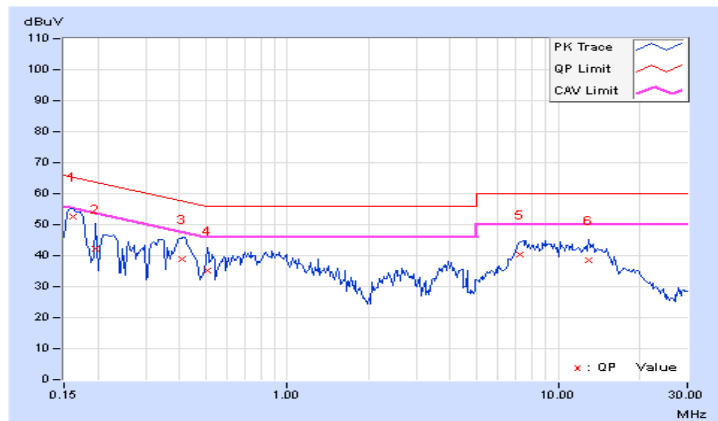


|       |             |                   |                                |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.16172         | 10.19                  | 42.85                | 29.12 | 53.04                 | 39.31 | 65.38        | 55.38 | -12.34      | -16.07 |
| 2                            | 0.19297         | 10.17                  | 33.18                | 8.86  | 43.35                 | 19.03 | 63.91        | 53.91 | -20.56      | -34.88 |
| 3                            | 0.26719         | 10.19                  | 28.83                | 16.02 | 39.02                 | 26.21 | 61.20        | 51.20 | -22.18      | -24.99 |
| 4                            | 0.39609         | 10.24                  | 33.58                | 26.94 | 43.82                 | 37.18 | 57.93        | 47.93 | -14.11      | -10.75 |
| 5                            | 0.87656         | 10.26                  | 24.66                | 16.80 | 34.92                 | 27.06 | 56.00        | 46.00 | -21.08      | -18.94 |
| 6                            | 7.20703         | 10.44                  | 30.80                | 24.76 | 41.24                 | 35.20 | 60.00        | 50.00 | -18.76      | -14.80 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

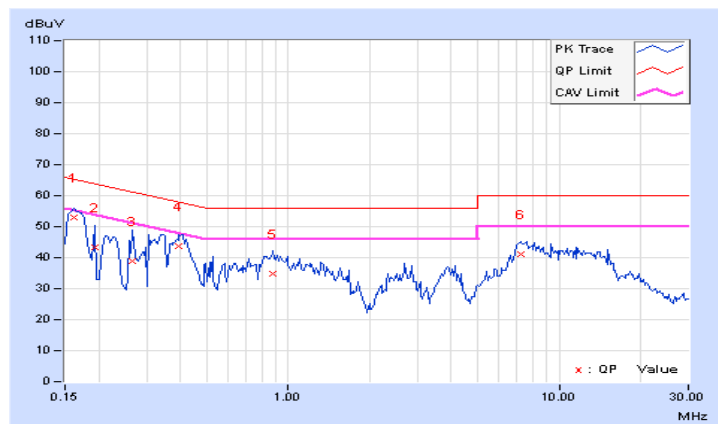


## 4.2.9 Test Results (Mode 4)

|       |          |                   |                                |
|-------|----------|-------------------|--------------------------------|
| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|

| Phase Of Power : Line (L) |                 |                        |                      |       |                       |       |              |       |             |        |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                           |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                         | 0.15391         | 10.20                  | 29.85                | 20.33 | 40.05                 | 30.53 | 65.79        | 55.79 | -25.74      | -25.26 |
| 2                         | 0.19297         | 10.20                  | 27.79                | 18.52 | 37.99                 | 28.72 | 63.91        | 53.91 | -25.92      | -25.19 |
| 3                         | 0.34141         | 10.23                  | 24.43                | 21.52 | 34.66                 | 31.75 | 59.17        | 49.17 | -24.51      | -17.42 |
| 4                         | 3.41406         | 10.30                  | 21.71                | 11.31 | 32.01                 | 21.61 | 56.00        | 46.00 | -23.99      | -24.39 |
| 5                         | 3.77734         | 10.31                  | 17.39                | 6.14  | 27.70                 | 16.45 | 56.00        | 46.00 | -28.30      | -29.55 |
| 6                         | 13.64453        | 11.15                  | 17.04                | 11.70 | 28.19                 | 22.85 | 60.00        | 50.00 | -31.81      | -27.15 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

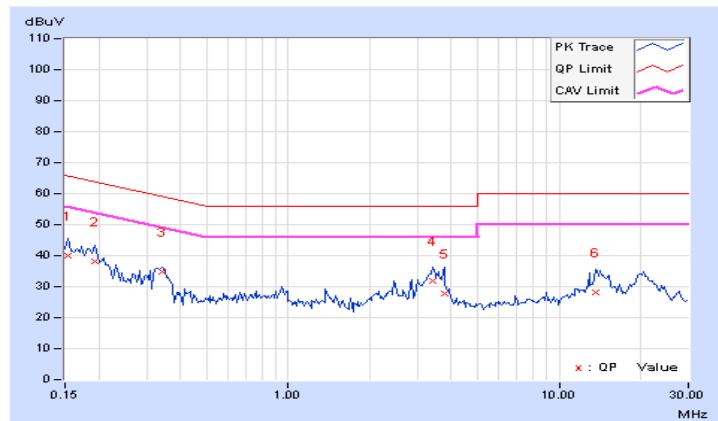


|       |             |                   |                                |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.17344         | 10.18                  | 28.89                | 19.60 | 39.07                 | 29.78 | 64.79        | 54.79 | -25.72      | -25.01 |
| 2                            | 0.33750         | 10.22                  | 22.82                | 15.42 | 33.04                 | 25.64 | 59.26        | 49.26 | -26.22      | -23.62 |
| 3                            | 2.69922         | 10.28                  | 16.37                | 7.13  | 26.65                 | 17.41 | 56.00        | 46.00 | -29.35      | -28.59 |
| 4                            | 3.33984         | 10.25                  | 21.28                | 12.21 | 31.53                 | 22.46 | 56.00        | 46.00 | -24.47      | -23.54 |
| 5                            | 13.93359        | 10.99                  | 19.12                | 13.63 | 30.11                 | 24.62 | 60.00        | 50.00 | -29.89      | -25.38 |
| 6                            | 20.38672        | 11.38                  | 17.63                | 10.26 | 29.01                 | 21.64 | 60.00        | 50.00 | -30.99      | -28.36 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

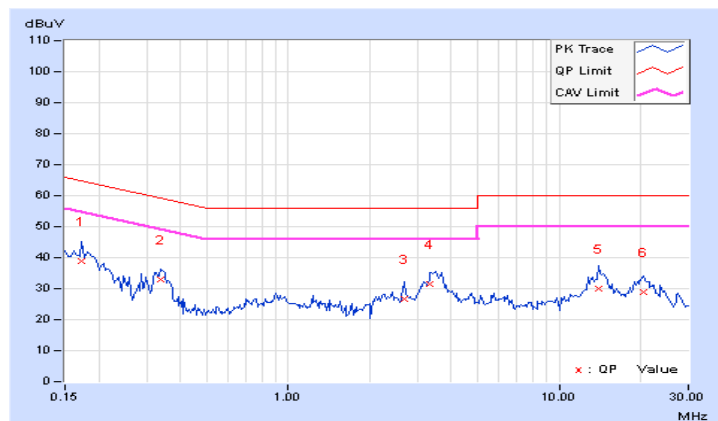




### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                     |             |
| 1       | 2412            | 9.08                | 8.12    | 8.60    | 8.62    | 0.5                 | PASS        |
| 6       | 2437            | 9.11                | 9.10    | 9.57    | 10.09   | 0.5                 | PASS        |
| 11      | 2462            | 8.13                | 8.59    | 9.05    | 9.11    | 0.5                 | PASS        |

##### 802.11g

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                     |             |
| 1       | 2412            | 16.40               | 16.41   | 16.40   | 16.40   | 0.5                 | PASS        |
| 6       | 2437            | 16.42               | 16.41   | 16.42   | 16.43   | 0.5                 | PASS        |
| 11      | 2462            | 16.35               | 16.38   | 16.40   | 16.40   | 0.5                 | PASS        |

##### 802.11n (HT20)


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                     |             |
| 1       | 2412            | 17.62               | 17.62   | 17.62   | 17.64   | 0.5                 | PASS        |
| 6       | 2437            | 17.67               | 17.61   | 17.64   | 17.65   | 0.5                 | PASS        |
| 11      | 2462            | 17.63               | 17.64   | 17.64   | 17.66   | 0.5                 | PASS        |

##### 802.11n (HT40)


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                     |             |
| 3       | 2422            | 35.86               | 35.87   | 35.80   | 35.63   | 0.5                 | Pass        |
| 6       | 2437            | 36.16               | 35.49   | 35.60   | 35.81   | 0.5                 | Pass        |
| 9       | 2452            | 34.89               | 35.87   | 35.14   | 36.10   | 0.5                 | Pass        |

### Spectrum Plot of Worst Value


#### 802.11b / Chain 1 : CH1

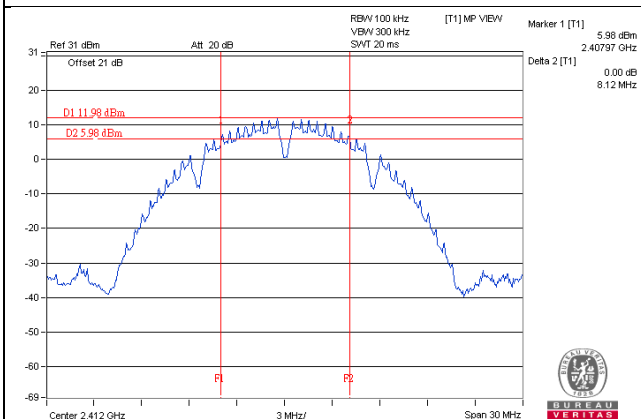


#### 802.11g / Chain 0 : CH11

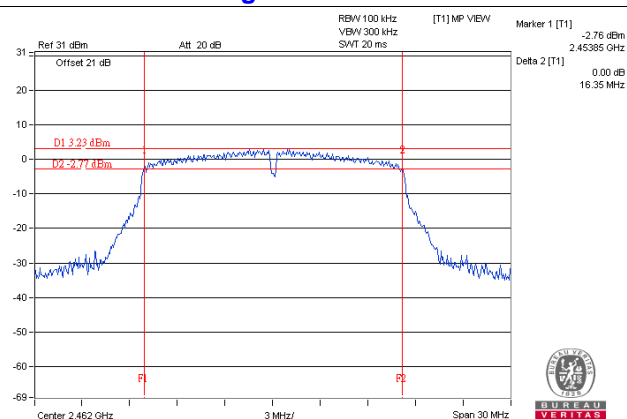

#### 802.11n (HT20) / Chain 1 : CH6

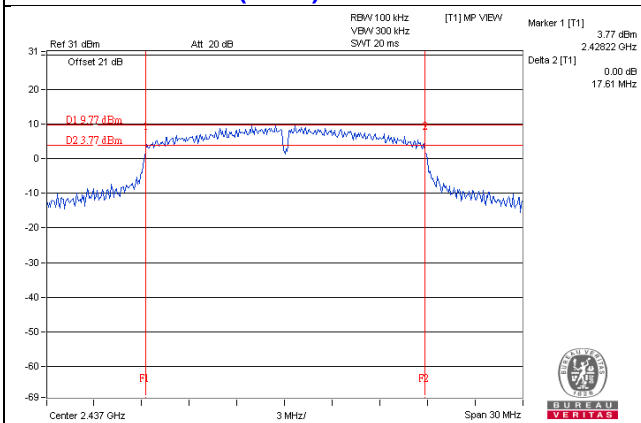

#### 802.11n (HT40) / Chain 0 : CH9

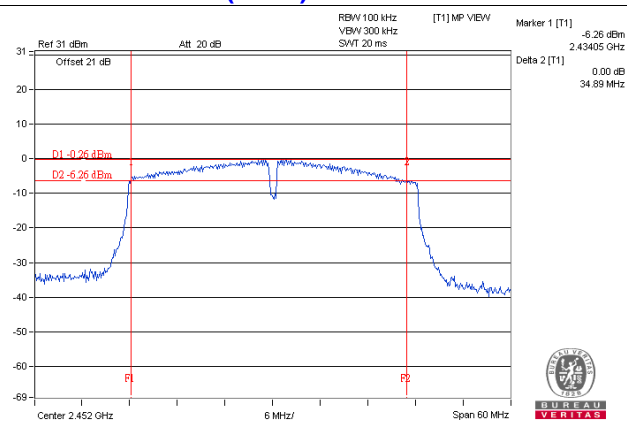

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.4.7 Test Results (Mode 1)

##### 802.11b

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 1     | 2412              | 21.02               | 20.98   | 20.60   | 21.30   | 501.499          | 27.00             | 30          | Pass        |
| 6     | 2437              | 23.18               | 23.05   | 22.81   | 22.74   | 788.724          | 28.97             | 30          | Pass        |
| 11    | 2462              | 20.34               | 20.03   | 20.01   | 20.96   | 433.805          | 26.37             | 30          | Pass        |

##### 802.11g

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 1     | 2412              | 15.21               | 15.31   | 14.55   | 15.79   | 133.593          | 21.26             | 30          | Pass        |
| 6     | 2437              | 22.70               | 22.07   | 22.26   | 21.97   | 672.939          | 28.28             | 30          | Pass        |
| 11    | 2462              | 15.85               | 15.61   | 15.55   | 17.12   | 162.266          | 22.10             | 30          | Pass        |

##### 802.11n (HT20)

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 1     | 2412              | 16.81               | 16.79   | 16.22   | 17.35   | 191.93           | 22.83             | 30          | Pass        |
| 6     | 2437              | 22.65               | 22.04   | 22.13   | 21.89   | 661.863          | 28.21             | 30          | Pass        |
| 11    | 2462              | 18.43               | 18.12   | 18.14   | 19.19   | 282.674          | 24.51             | 30          | Pass        |

##### 802.11n (HT40)

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 3     | 2422              | 15.26               | 15.27   | 14.43   | 15.85   | 133.417          | 21.25             | 30          | Pass        |
| 6     | 2437              | 17.13               | 16.37   | 16.85   | 16.37   | 186.761          | 22.71             | 30          | Pass        |
| 9     | 2452              | 15.83               | 15.49   | 15.00   | 16.45   | 149.462          | 21.75             | 30          | Pass        |

#### 4.4.8 Test Results (Mode 2)

##### 802.11b

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 1     | 2412              | 21.02               | 20.98   | 20.60   | 21.30   | 501.499          | 27.00             | 30          | Pass        |
| 6     | 2437              | 23.18               | 23.05   | 22.81   | 22.74   | 788.724          | 28.97             | 30          | Pass        |
| 11    | 2462              | 20.34               | 20.03   | 20.01   | 20.96   | 433.805          | 26.37             | 30          | Pass        |

##### 802.11g

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 1     | 2412              | 15.21               | 15.31   | 14.55   | 15.79   | 133.593          | 21.26             | 30          | Pass        |
| 6     | 2437              | 22.70               | 22.07   | 22.26   | 21.97   | 672.939          | 28.28             | 30          | Pass        |
| 11    | 2462              | 15.08               | 15.02   | 14.30   | 15.40   | 125.569          | 20.99             | 30          | Pass        |

##### 802.11n (HT20)

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 1     | 2412              | 16.81               | 16.79   | 16.22   | 17.35   | 191.93           | 22.83             | 30          | Pass        |
| 6     | 2437              | 22.65               | 22.04   | 22.13   | 21.89   | 661.863          | 28.21             | 30          | Pass        |
| 11    | 2462              | 16.38               | 16.08   | 15.62   | 16.52   | 165.352          | 22.18             | 30          | Pass        |

##### 802.11n (HT40)


| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 | Chain 3 |                  |                   |             |             |
| 3     | 2422              | 14.57               | 14.30   | 13.89   | 14.98   | 111.525          | 20.47             | 30          | Pass        |
| 6     | 2437              | 16.69               | 16.75   | 16.05   | 17.51   | 190.617          | 22.80             | 30          | Pass        |
| 9     | 2452              | 15.83               | 15.49   | 15.00   | 16.45   | 149.462          | 21.75             | 30          | Pass        |

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results (Mode 1)

##### 802.11b

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -9.79          | 6.02            | -3.77                | 6.61             | Pass       |
|          | 6       | 2437        | -8.40          | 6.02            | -2.38                | 6.61             | Pass       |
|          | 11      | 2462        | -10.83         | 6.02            | -4.81                | 6.61             | Pass       |
| 1        | 1       | 2412        | -10.82         | 6.02            | -4.80                | 6.61             | Pass       |
|          | 6       | 2437        | -7.99          | 6.02            | -1.97                | 6.61             | Pass       |
|          | 11      | 2462        | -11.02         | 6.02            | -5.00                | 6.61             | Pass       |
| 2        | 1       | 2412        | -9.62          | 6.02            | -3.60                | 6.61             | Pass       |
|          | 6       | 2437        | -7.99          | 6.02            | -1.97                | 6.61             | Pass       |
|          | 11      | 2462        | -9.74          | 6.02            | -3.72                | 6.61             | Pass       |
| 3        | 1       | 2412        | -9.66          | 6.02            | -3.64                | 6.61             | Pass       |
|          | 6       | 2437        | -8.34          | 6.02            | -2.32                | 6.61             | Pass       |
|          | 11      | 2462        | -9.88          | 6.02            | -3.86                | 6.61             | Pass       |

**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.

##### 802.11g

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -16.66         | 6.02            | -10.64               | 6.61             | Pass       |
|          | 6       | 2437        | -8.93          | 6.02            | -2.91                | 6.61             | Pass       |
|          | 11      | 2462        | -15.61         | 6.02            | -9.59                | 6.61             | Pass       |
| 1        | 1       | 2412        | -16.79         | 6.02            | -10.77               | 6.61             | Pass       |
|          | 6       | 2437        | -9.77          | 6.02            | -3.75                | 6.61             | Pass       |
|          | 11      | 2462        | -15.25         | 6.02            | -9.23                | 6.61             | Pass       |
| 2        | 1       | 2412        | -16.42         | 6.02            | -10.40               | 6.61             | Pass       |
|          | 6       | 2437        | -10.90         | 6.02            | -4.88                | 6.61             | Pass       |
|          | 11      | 2462        | -16.02         | 6.02            | -10.00               | 6.61             | Pass       |
| 3        | 1       | 2412        | -15.62         | 6.02            | -9.60                | 6.61             | Pass       |
|          | 6       | 2437        | -10.22         | 6.02            | -4.20                | 6.61             | Pass       |
|          | 11      | 2462        | -14.88         | 6.02            | -8.86                | 6.61             | Pass       |

**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.



### 802.11n (HT20)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -15.15         | 6.02            | -9.13                | 6.61             | Pass       |
|          | 6       | 2437        | -10.01         | 6.02            | -3.99                | 6.61             | Pass       |
|          | 11      | 2462        | -13.44         | 6.02            | -7.42                | 6.61             | Pass       |
| 1        | 1       | 2412        | -16.16         | 6.02            | -10.14               | 6.61             | Pass       |
|          | 6       | 2437        | -9.84          | 6.02            | -3.82                | 6.61             | Pass       |
|          | 11      | 2462        | -13.18         | 6.02            | -7.16                | 6.61             | Pass       |
| 2        | 1       | 2412        | -14.78         | 6.02            | -8.76                | 6.61             | Pass       |
|          | 6       | 2437        | -9.83          | 6.02            | -3.81                | 6.61             | Pass       |
|          | 11      | 2462        | -13.80         | 6.02            | -7.78                | 6.61             | Pass       |
| 3        | 1       | 2412        | -14.39         | 6.02            | -8.37                | 6.61             | Pass       |
|          | 6       | 2437        | -11.39         | 6.02            | -5.37                | 6.61             | Pass       |
|          | 11      | 2462        | -13.03         | 6.02            | -7.01                | 6.61             | Pass       |

**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.


### 802.11n (HT40)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 3       | 2412        | -19.06         | 6.02            | -13.04               | 6.61             | Pass       |
|          | 6       | 2437        | -16.68         | 6.02            | -10.66               | 6.61             | Pass       |
|          | 9       | 2462        | -18.78         | 6.02            | -12.76               | 6.61             | Pass       |
| 1        | 3       | 2412        | -20.05         | 6.02            | -14.03               | 6.61             | Pass       |
|          | 6       | 2437        | -16.67         | 6.02            | -10.65               | 6.61             | Pass       |
|          | 9       | 2462        | -19.48         | 6.02            | -13.46               | 6.61             | Pass       |
| 2        | 3       | 2412        | -19.75         | 6.02            | -13.73               | 6.61             | Pass       |
|          | 6       | 2437        | -17.27         | 6.02            | -11.25               | 6.61             | Pass       |
|          | 9       | 2462        | -19.19         | 6.02            | -13.17               | 6.61             | Pass       |
| 3        | 3       | 2412        | -18.80         | 6.02            | -12.78               | 6.61             | Pass       |
|          | 6       | 2437        | -18.72         | 6.02            | -12.70               | 6.61             | Pass       |
|          | 9       | 2462        | -18.66         | 6.02            | -12.64               | 6.61             | Pass       |


**Note:** 1. Directional gain = 7.39dBi > 6dBi, so the power density limit shall be reduced to  $8-(7.39-6) = 6.61$ dBm.

### Spectrum Plot of Worst Value


**802.11b / Chain 1 : CH6**

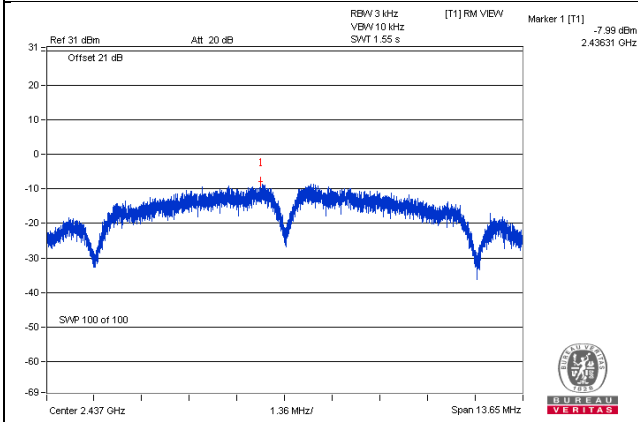


**802.11g / Chain 0 : CH6**

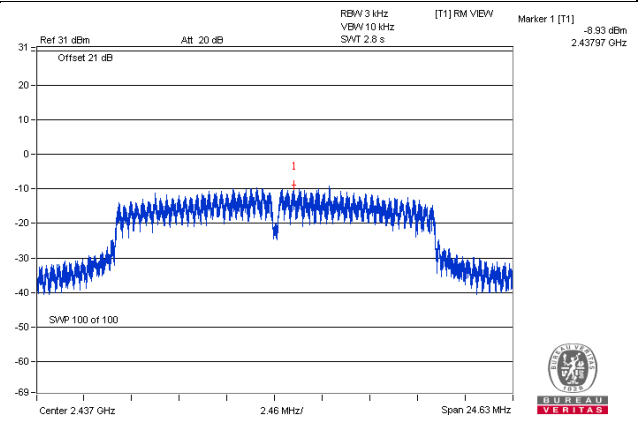

**802.11n (HT20) / Chain 2 : CH6**

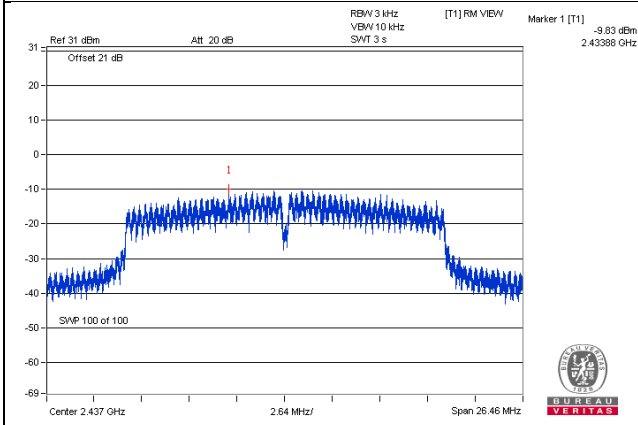

**802.11n (HT40) / Chain 1 : CH6**

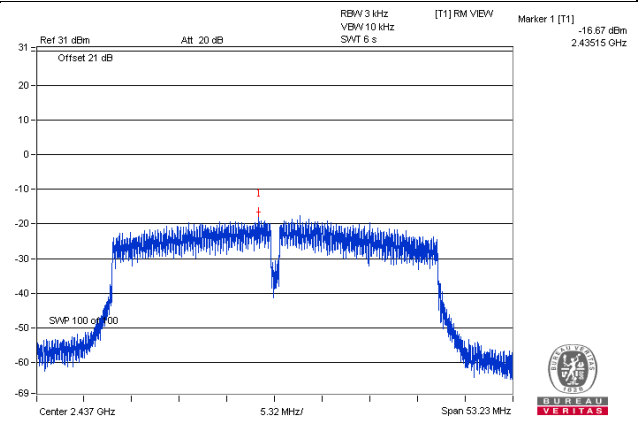

#### 4.5.8 Test Results (Mode 2)

##### 802.11b

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -9.79          | 6.02            | -3.77                | 3.94             | Pass       |
|          | 6       | 2437        | -8.40          | 6.02            | -2.38                | 3.94             | Pass       |
|          | 11      | 2462        | -10.83         | 6.02            | -4.81                | 3.94             | Pass       |
| 1        | 1       | 2412        | -10.82         | 6.02            | -4.80                | 3.94             | Pass       |
|          | 6       | 2437        | -7.99          | 6.02            | -1.97                | 3.94             | Pass       |
|          | 11      | 2462        | -11.02         | 6.02            | -5.00                | 3.94             | Pass       |
| 2        | 1       | 2412        | -9.62          | 6.02            | -3.60                | 3.94             | Pass       |
|          | 6       | 2437        | -7.99          | 6.02            | -1.97                | 3.94             | Pass       |
|          | 11      | 2462        | -9.74          | 6.02            | -3.72                | 3.94             | Pass       |
| 3        | 1       | 2412        | -9.66          | 6.02            | -3.64                | 3.94             | Pass       |
|          | 6       | 2437        | -8.34          | 6.02            | -2.32                | 3.94             | Pass       |
|          | 11      | 2462        | -9.88          | 6.02            | -3.86                | 3.94             | Pass       |

**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94$ dBm.

##### 802.11g

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -16.66         | 6.02            | -10.64               | 3.94             | Pass       |
|          | 6       | 2437        | -8.93          | 6.02            | -2.91                | 3.94             | Pass       |
|          | 11      | 2462        | -16.89         | 6.02            | -10.87               | 3.94             | Pass       |
| 1        | 1       | 2412        | -16.79         | 6.02            | -10.77               | 3.94             | Pass       |
|          | 6       | 2437        | -9.77          | 6.02            | -3.75                | 3.94             | Pass       |
|          | 11      | 2462        | -17.60         | 6.02            | -11.58               | 3.94             | Pass       |
| 2        | 1       | 2412        | -16.42         | 6.02            | -10.40               | 3.94             | Pass       |
|          | 6       | 2437        | -10.90         | 6.02            | -4.88                | 3.94             | Pass       |
|          | 11      | 2462        | -18.17         | 6.02            | -12.15               | 3.94             | Pass       |
| 3        | 1       | 2412        | -15.62         | 6.02            | -9.60                | 3.94             | Pass       |
|          | 6       | 2437        | -10.22         | 6.02            | -4.20                | 3.94             | Pass       |
|          | 11      | 2462        | -17.22         | 6.02            | -11.20               | 3.94             | Pass       |

**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94$ dBm.

### 802.11n (HT20)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -15.15         | 6.02            | -9.13                | 3.94             | Pass       |
|          | 6       | 2437        | -10.01         | 6.02            | -3.99                | 3.94             | Pass       |
|          | 11      | 2462        | -15.96         | 6.02            | -9.94                | 3.94             | Pass       |
| 1        | 1       | 2412        | -16.16         | 6.02            | -10.14               | 3.94             | Pass       |
|          | 6       | 2437        | -9.84          | 6.02            | -3.82                | 3.94             | Pass       |
|          | 11      | 2462        | -16.03         | 6.02            | -10.01               | 3.94             | Pass       |
| 2        | 1       | 2412        | -14.78         | 6.02            | -8.76                | 3.94             | Pass       |
|          | 6       | 2437        | -9.83          | 6.02            | -3.81                | 3.94             | Pass       |
|          | 11      | 2462        | -16.48         | 6.02            | -10.46               | 3.94             | Pass       |
| 3        | 1       | 2412        | -14.39         | 6.02            | -8.37                | 3.94             | Pass       |
|          | 6       | 2437        | -11.39         | 6.02            | -5.37                | 3.94             | Pass       |
|          | 11      | 2462        | -15.98         | 6.02            | -9.96                | 3.94             | Pass       |

**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94\text{dBm}$ .


### 802.11n (HT40)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=4) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 3       | 2412        | -20.33         | 6.02            | -14.31               | 3.94             | Pass       |
|          | 6       | 2437        | -17.63         | 6.02            | -11.61               | 3.94             | Pass       |
|          | 9       | 2462        | -18.78         | 6.02            | -12.76               | 3.94             | Pass       |
| 1        | 3       | 2412        | -20.18         | 6.02            | -14.16               | 3.94             | Pass       |
|          | 6       | 2437        | -18.35         | 6.02            | -12.33               | 3.94             | Pass       |
|          | 9       | 2462        | -19.48         | 6.02            | -13.46               | 3.94             | Pass       |
| 2        | 3       | 2412        | -21.21         | 6.02            | -15.19               | 3.94             | Pass       |
|          | 6       | 2437        | -17.35         | 6.02            | -11.33               | 3.94             | Pass       |
|          | 9       | 2462        | -19.19         | 6.02            | -13.17               | 3.94             | Pass       |
| 3        | 3       | 2412        | -19.49         | 6.02            | -13.47               | 3.94             | Pass       |
|          | 6       | 2437        | -18.04         | 6.02            | -12.02               | 3.94             | Pass       |
|          | 9       | 2462        | -18.66         | 6.02            | -12.64               | 3.94             | Pass       |


**Note:** 1. Directional gain = 10.06dBi > 6dBi, so the power density limit shall be reduced to  $8-(10.06-6) = 3.94\text{dBm}$ .

### Spectrum Plot of Worst Value


**802.11b / Chain 1 : CH6**

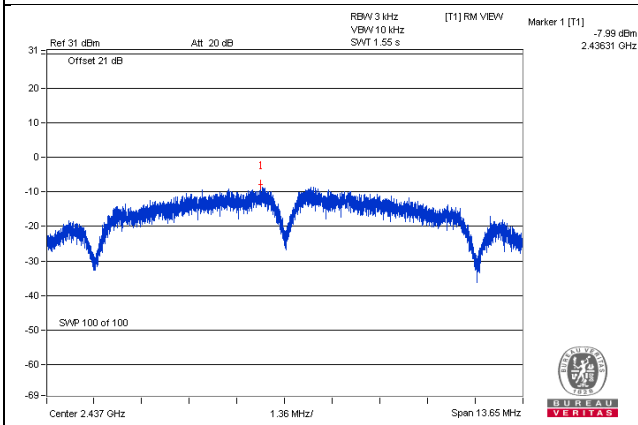


**802.11g / Chain 0 : CH6**

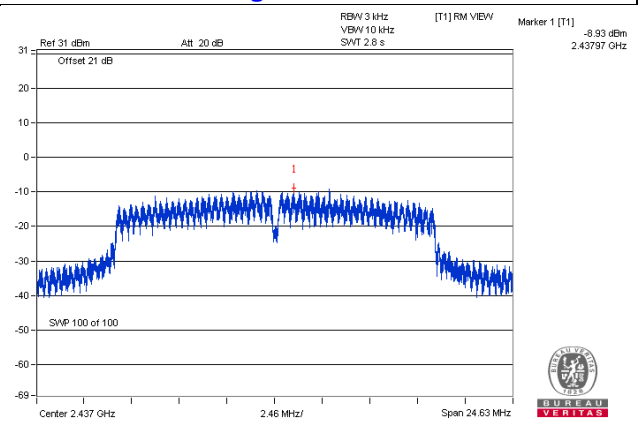

**802.11n (HT20) / Chain 2 : CH6**

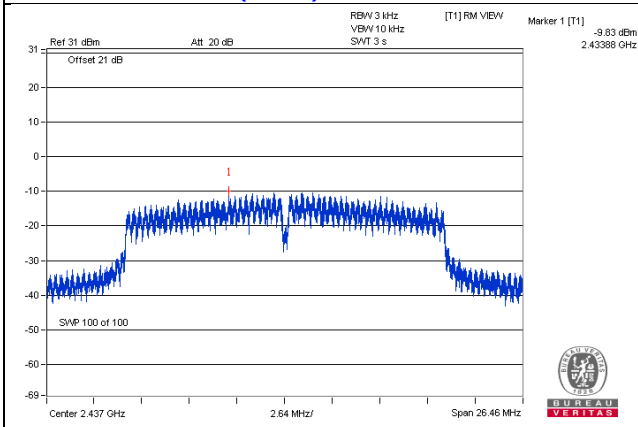

**802.11n (HT40) / Chain 2 : CH6**

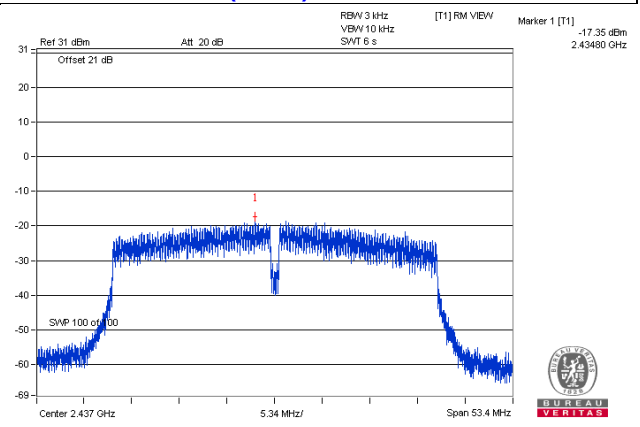


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.


### 4.6.6 EUT Operating Condition

Same as Item 4.3.6

### 4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

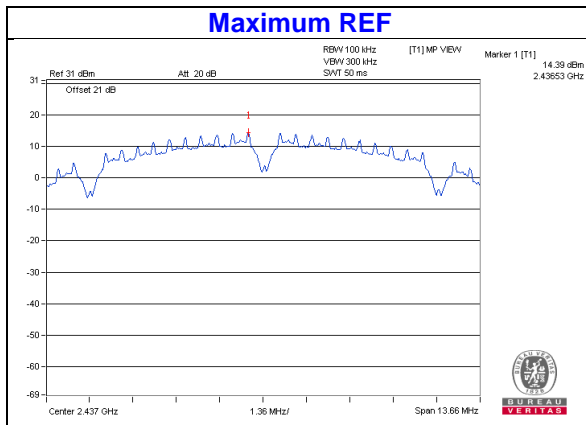


Chain 0


## CH 1      CH 6

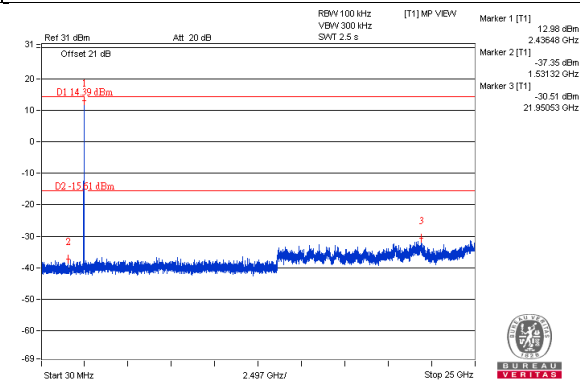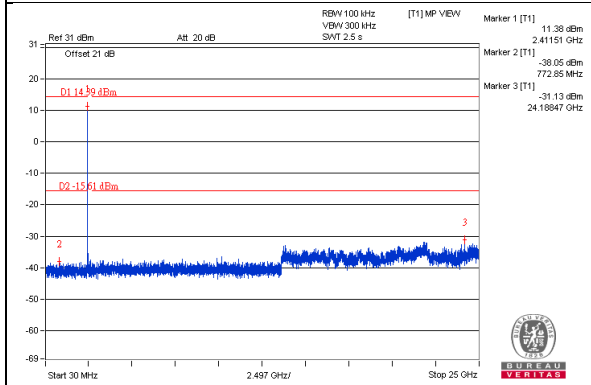


## CH 11

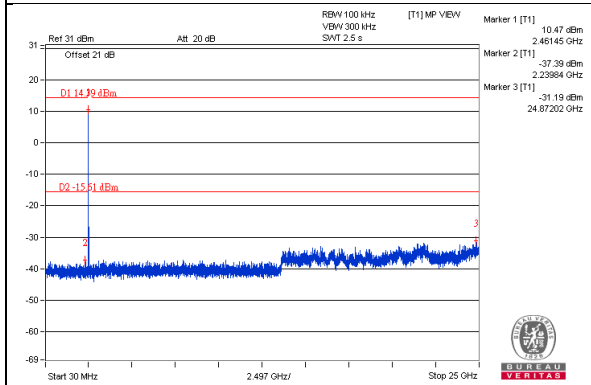




## CH 1 Band edge

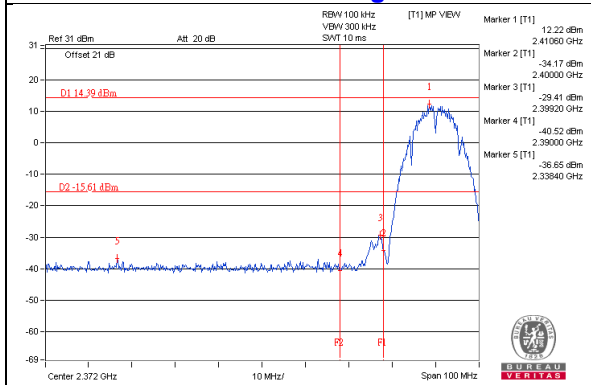

## CH 11 Band edge



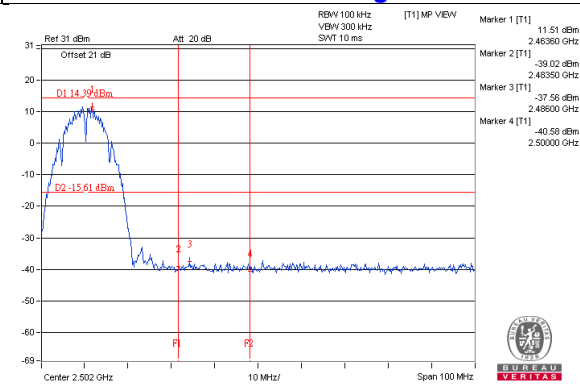


### Chain 1

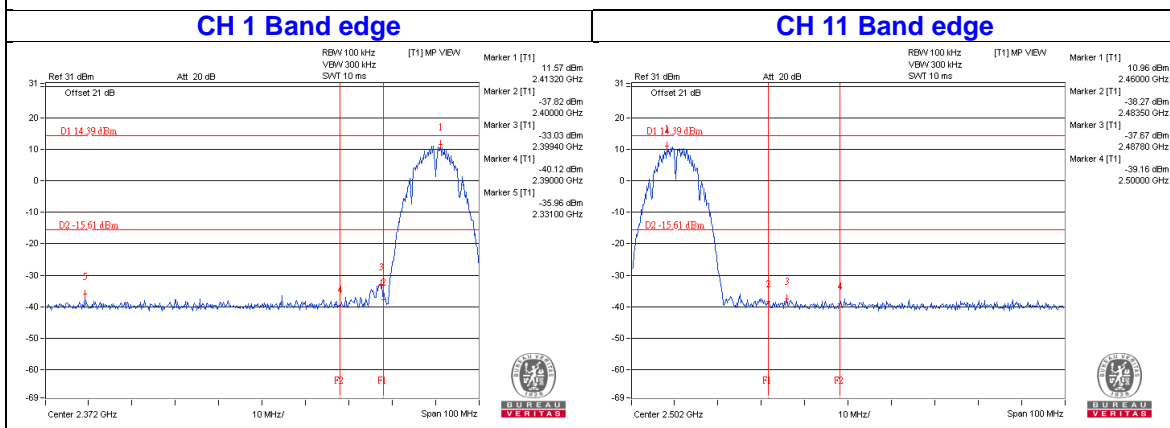
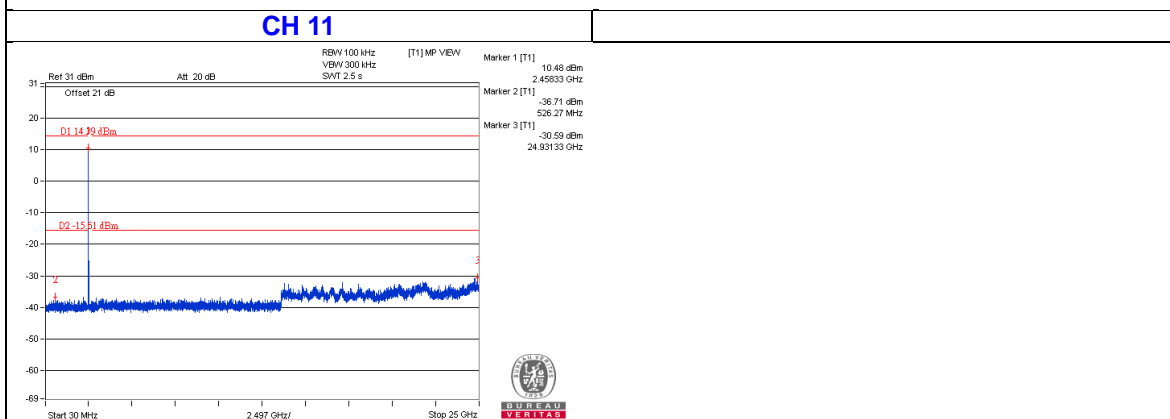
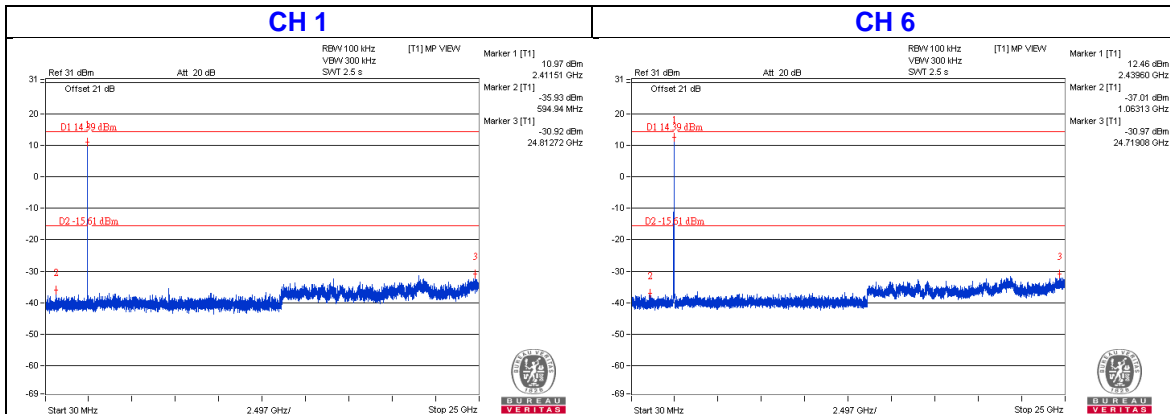





Chain 2

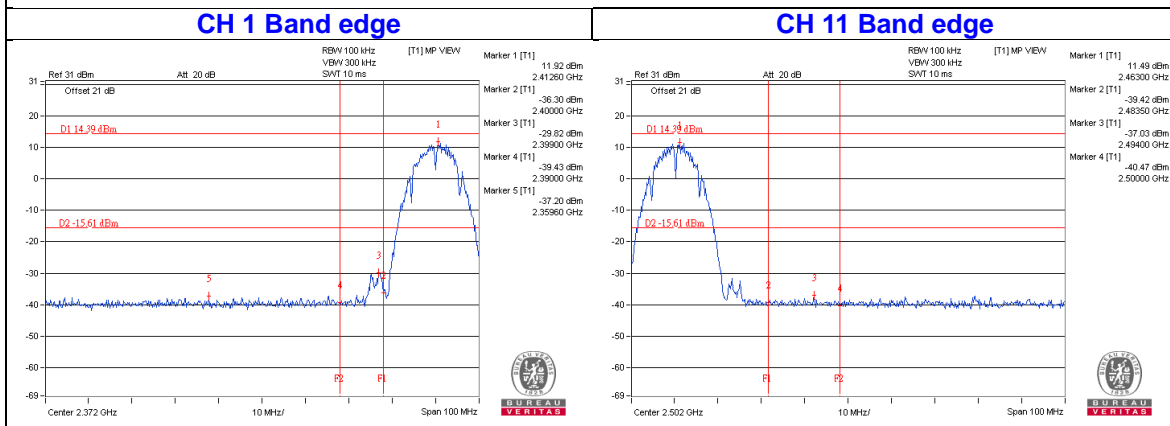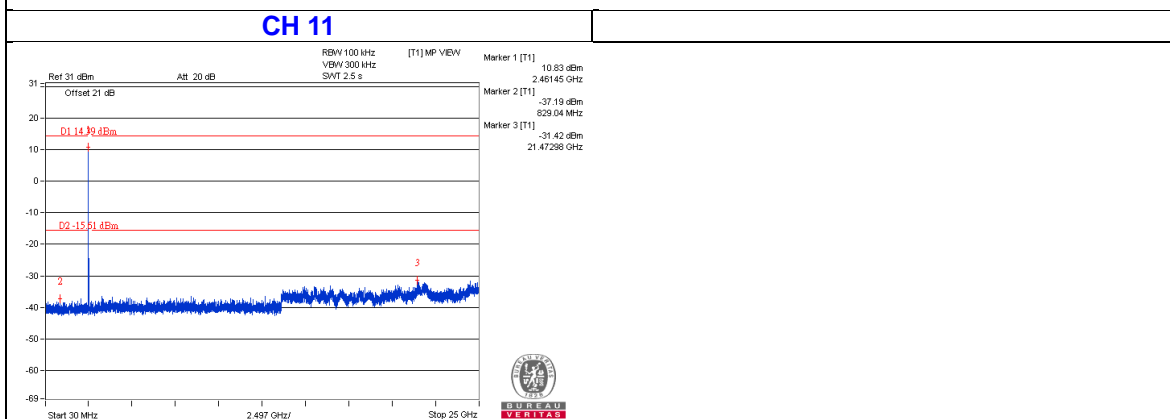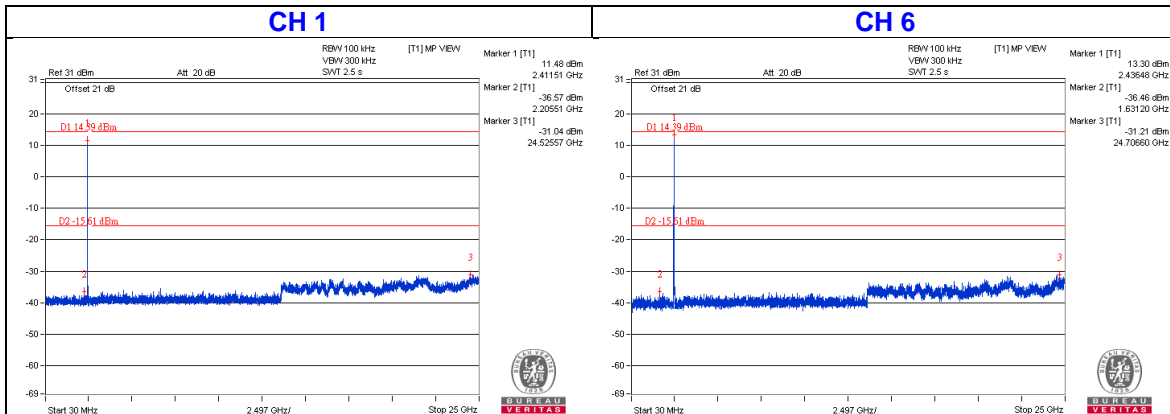




### Chain 3

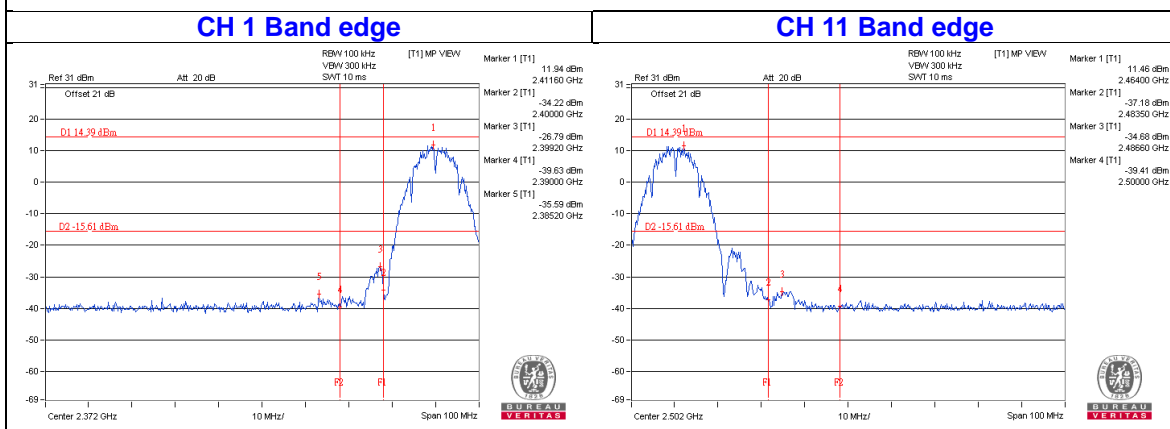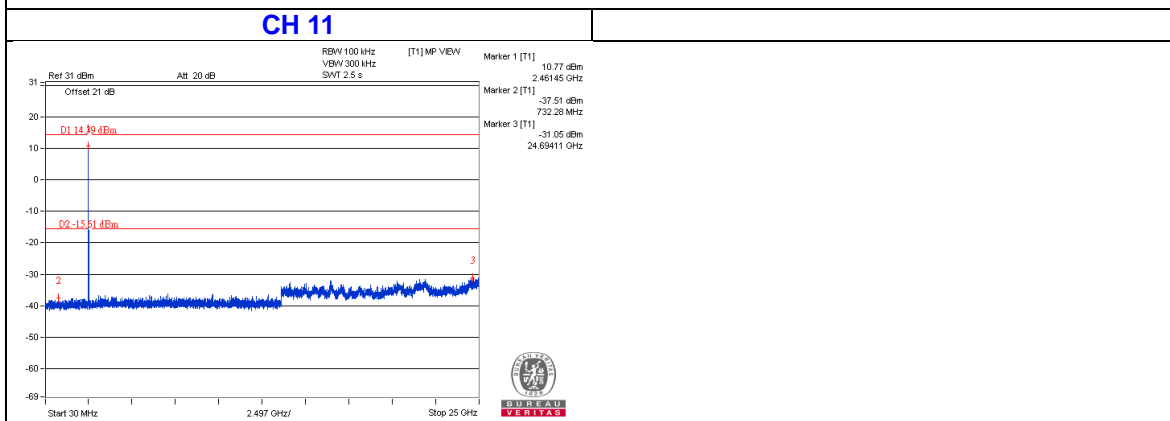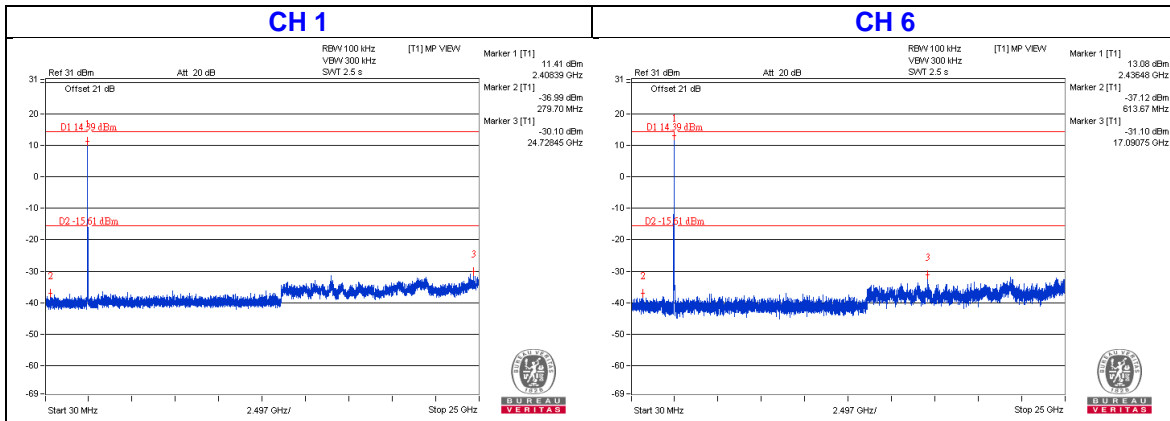




802.11g

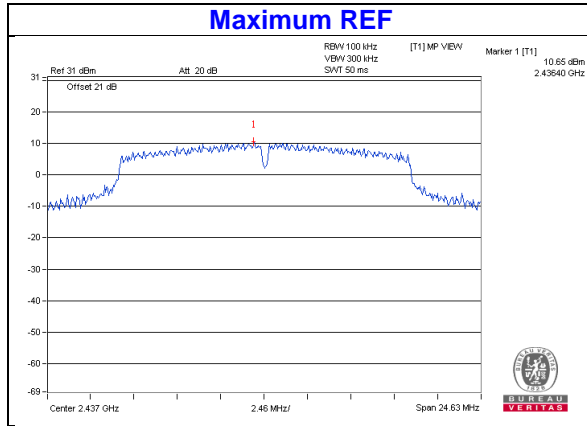




Chain 0

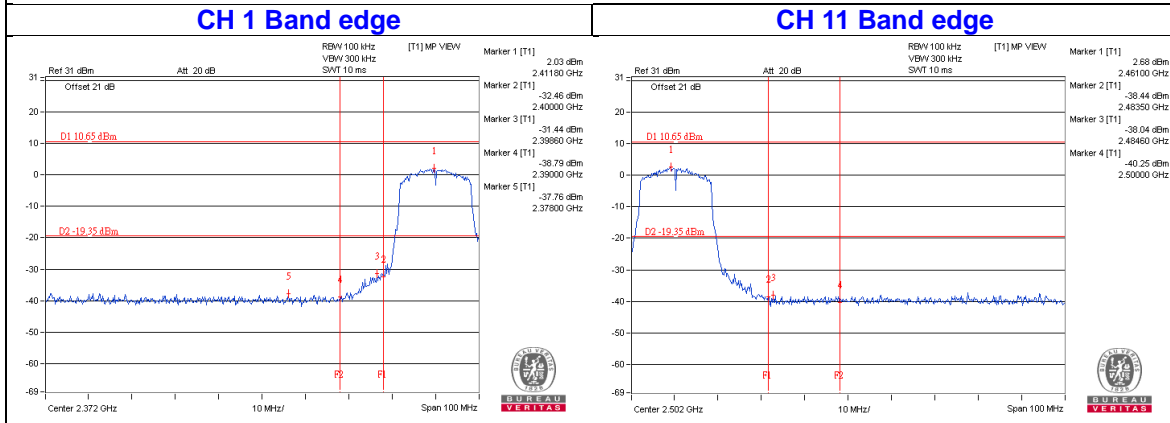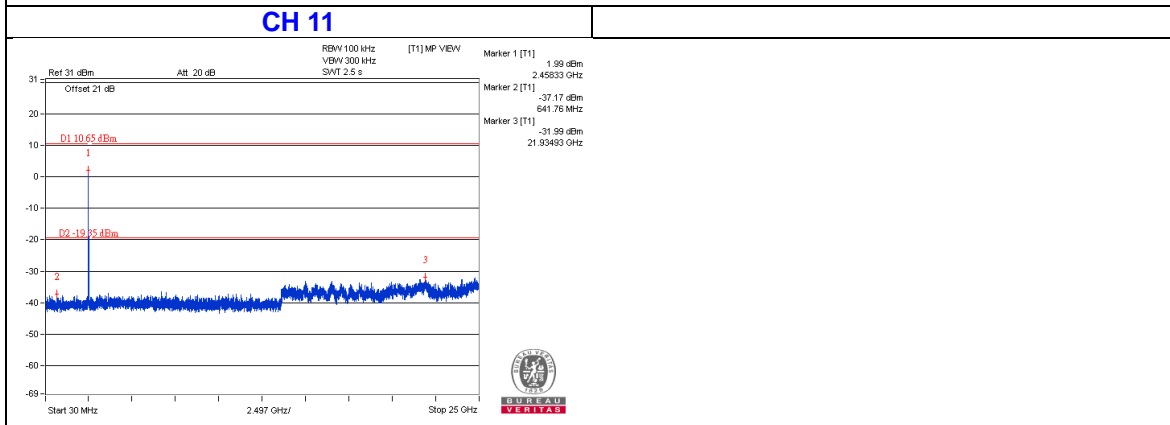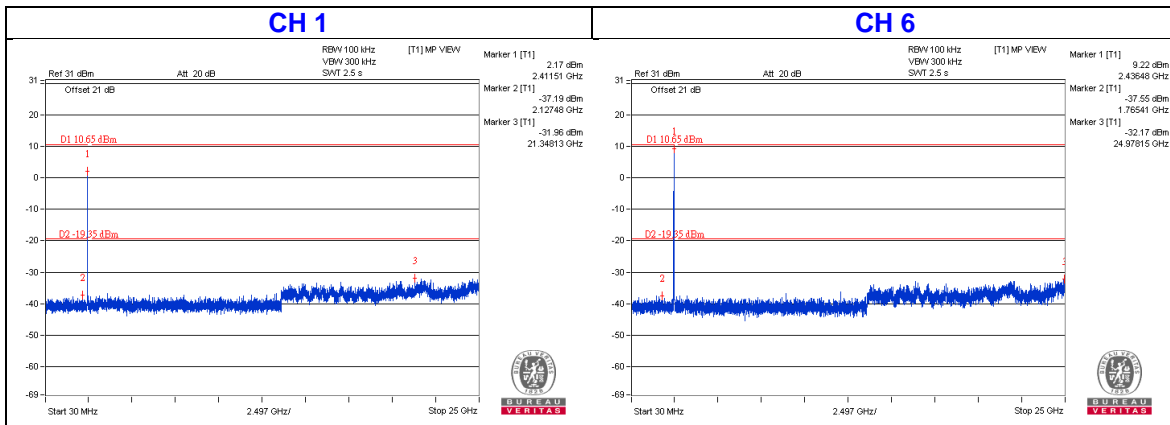




### Chain 1

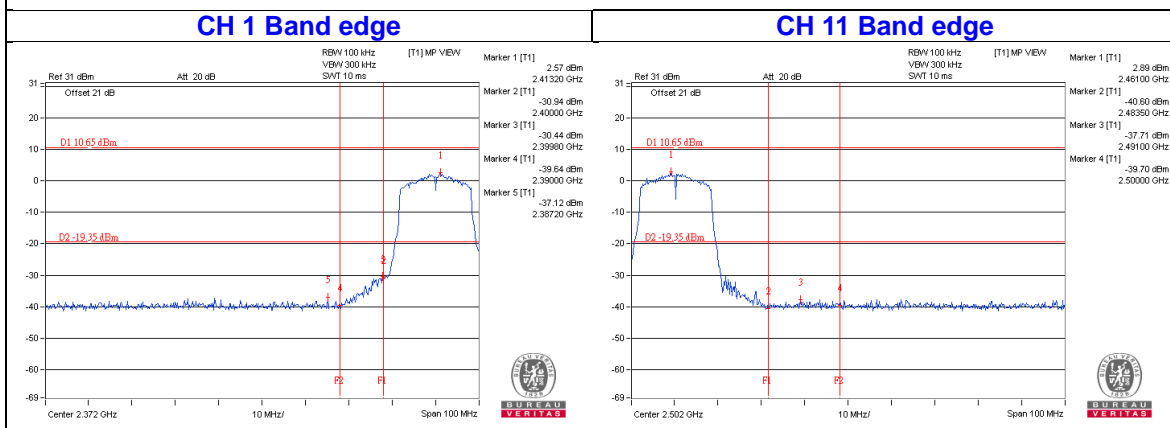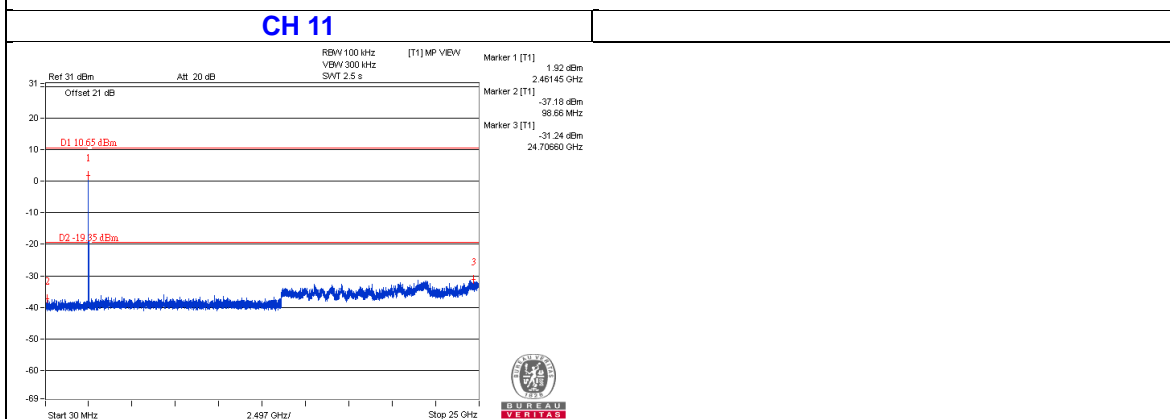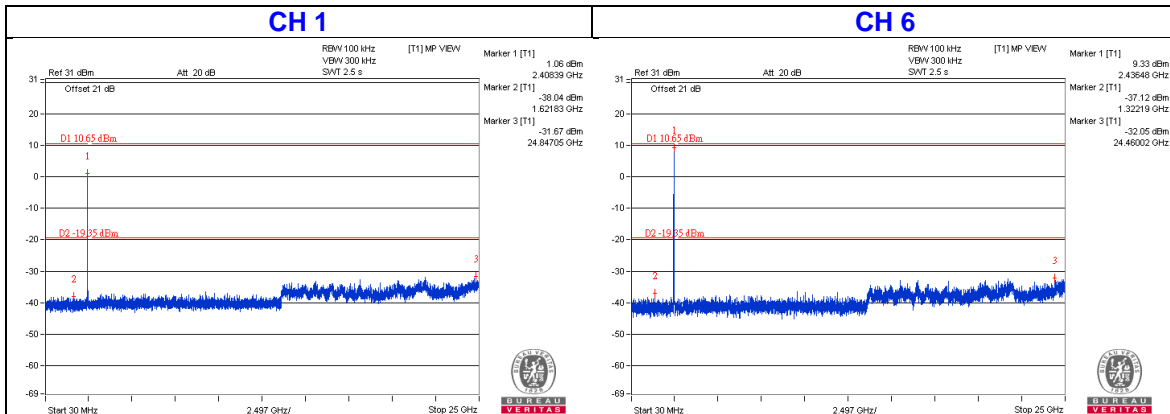


Chain 2

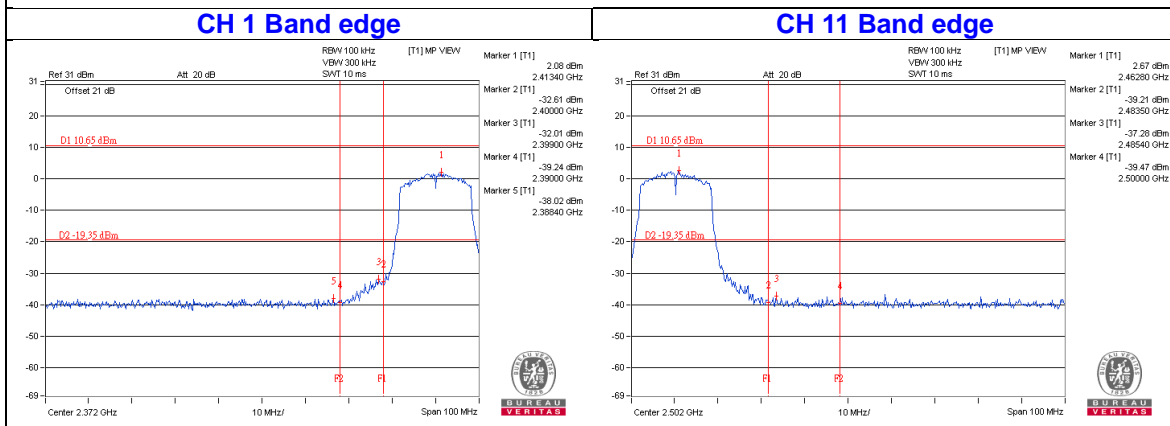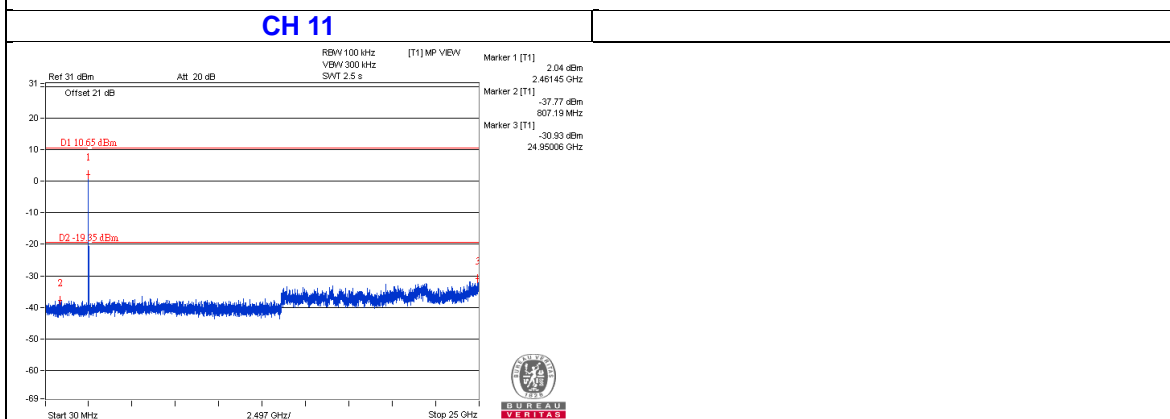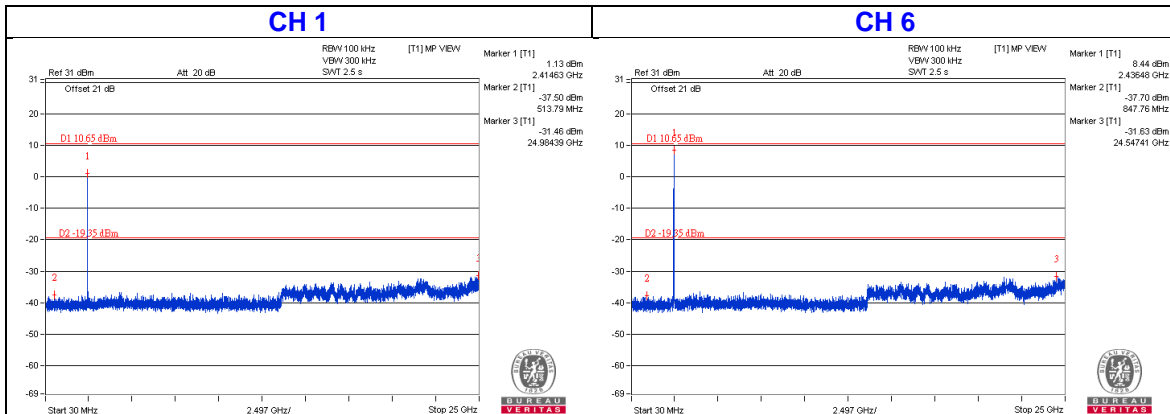




### Chain 3

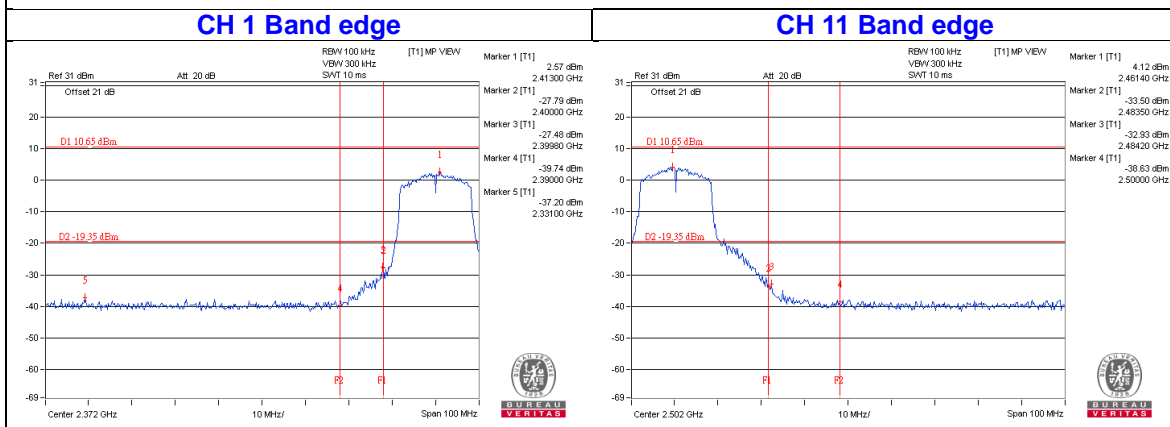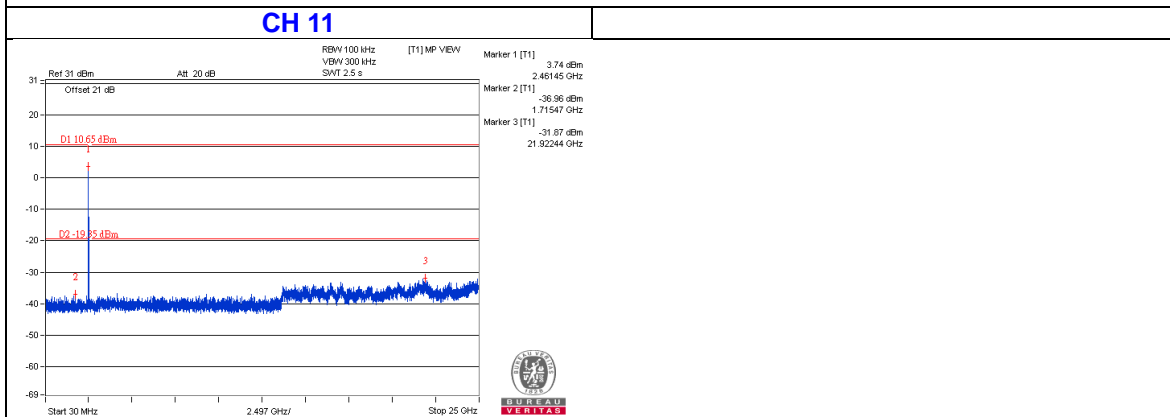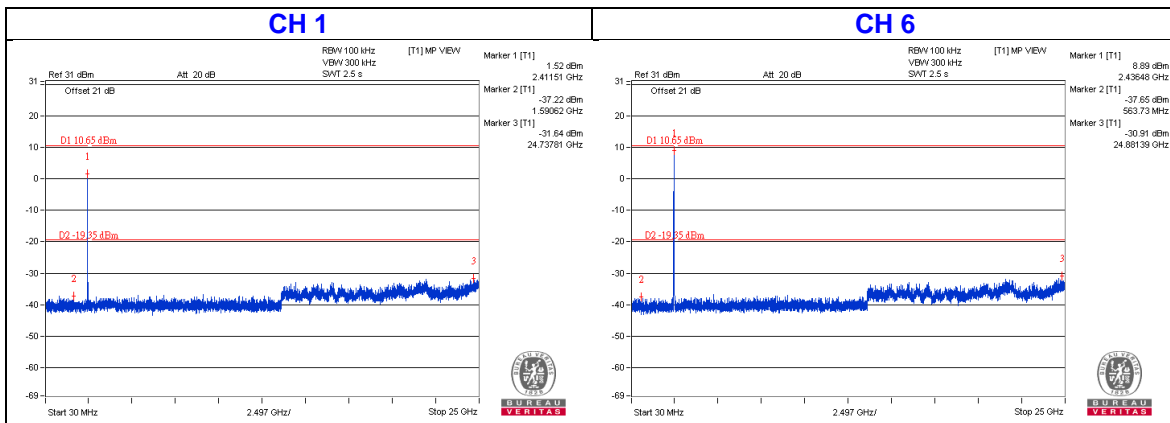




802.11n (HT20)

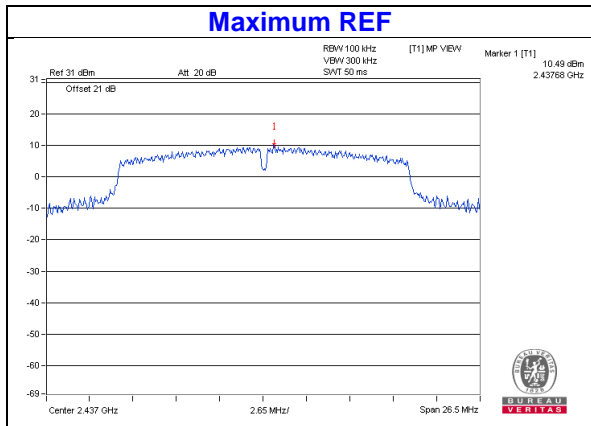

Chain 0

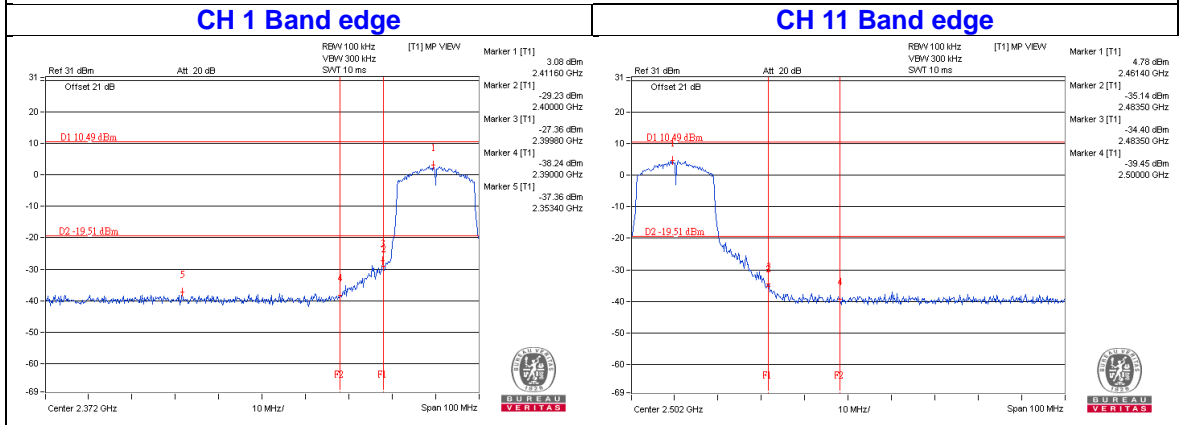
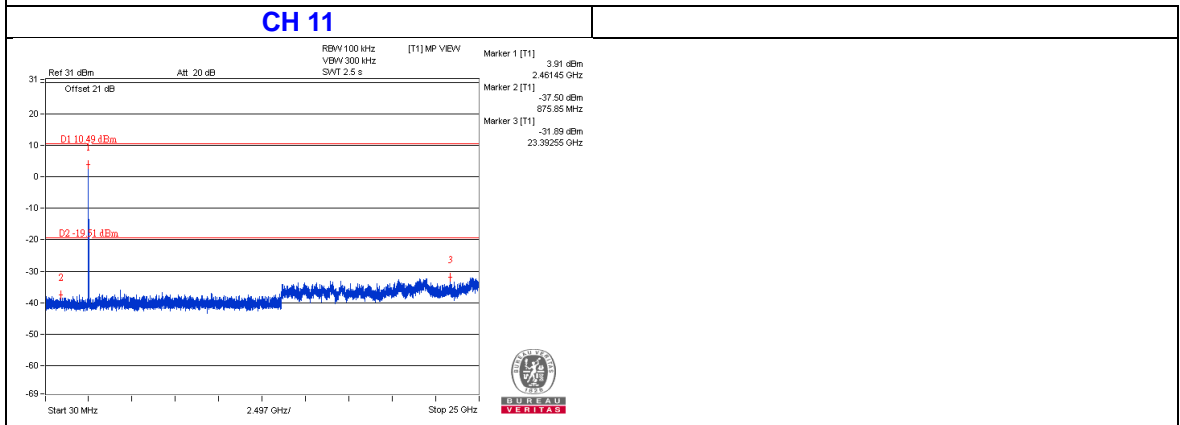
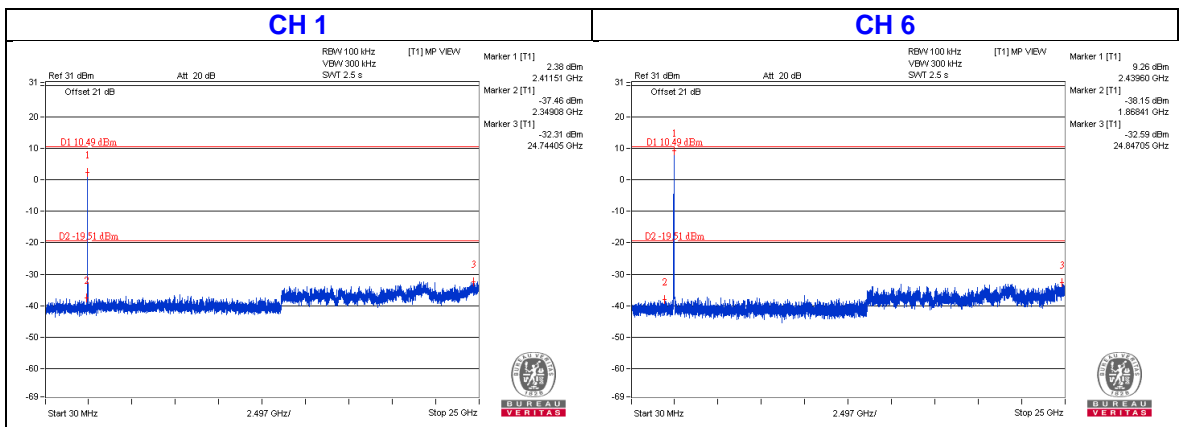


Chain 1

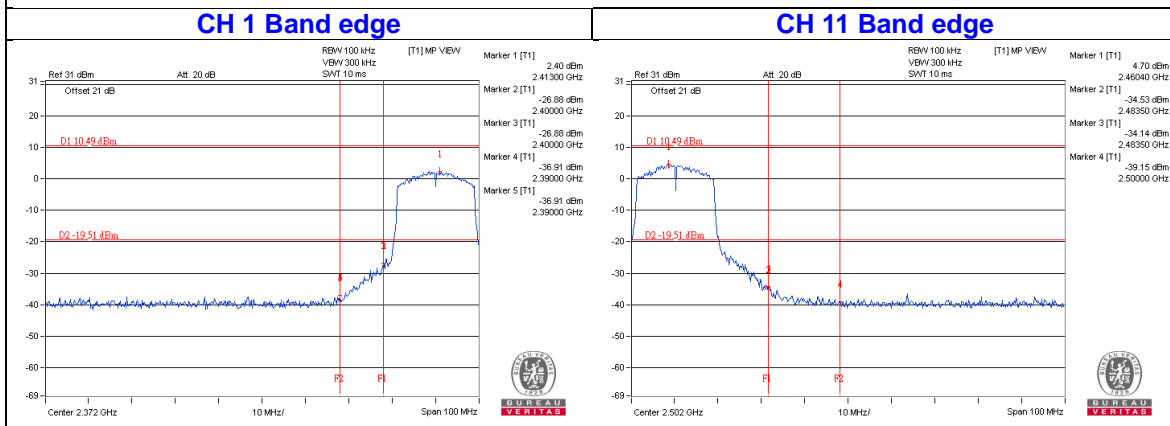
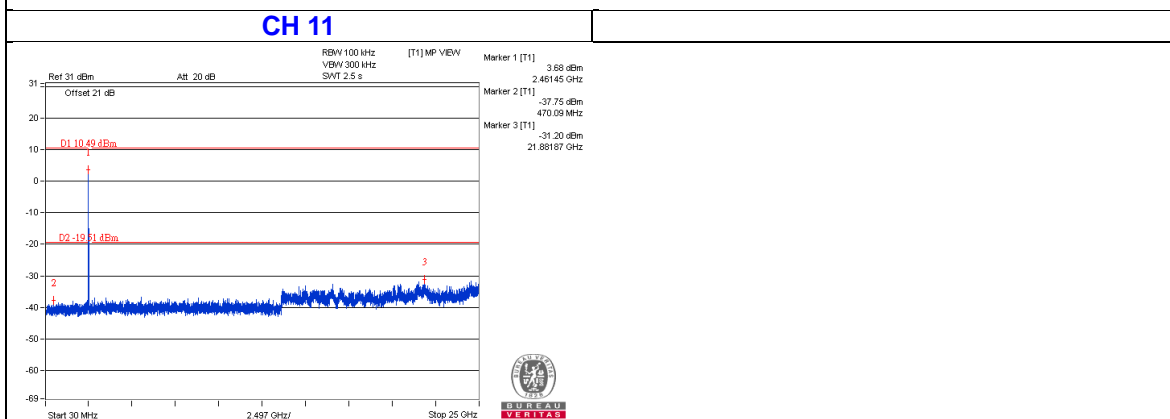
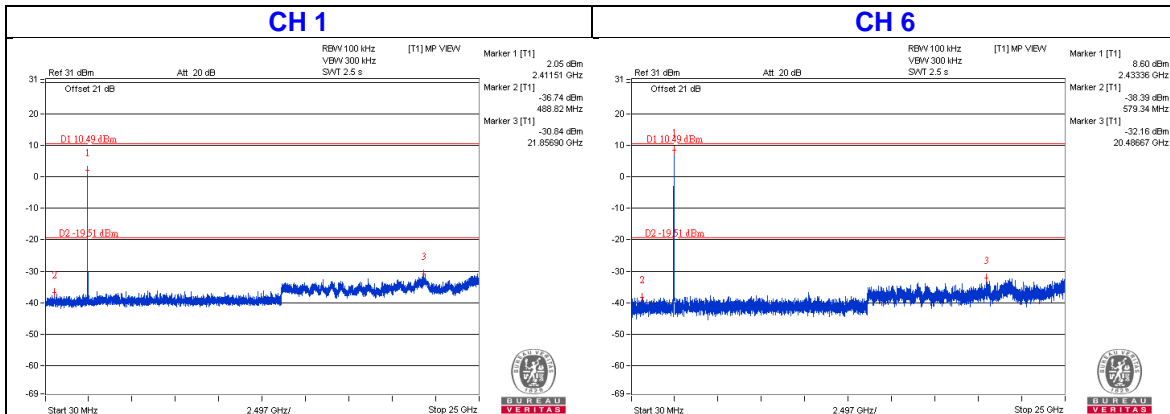





Chain 2

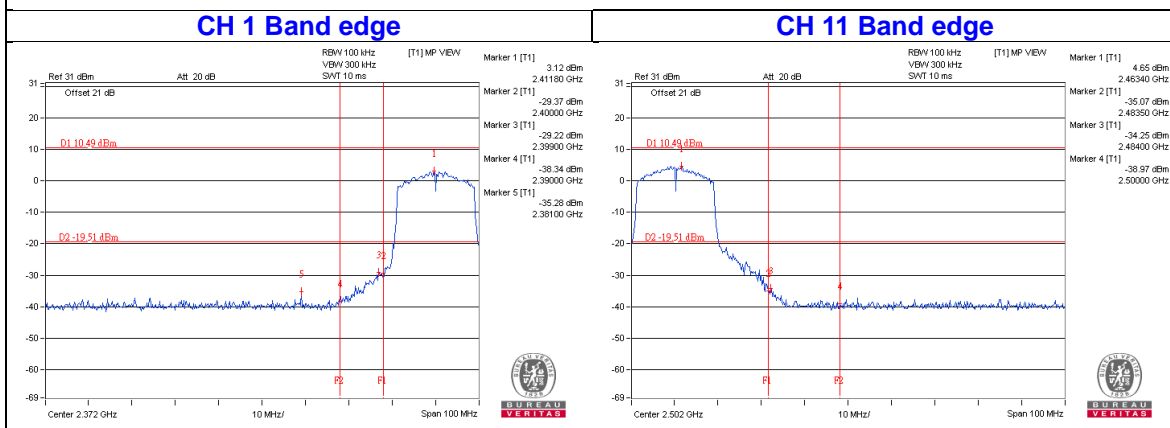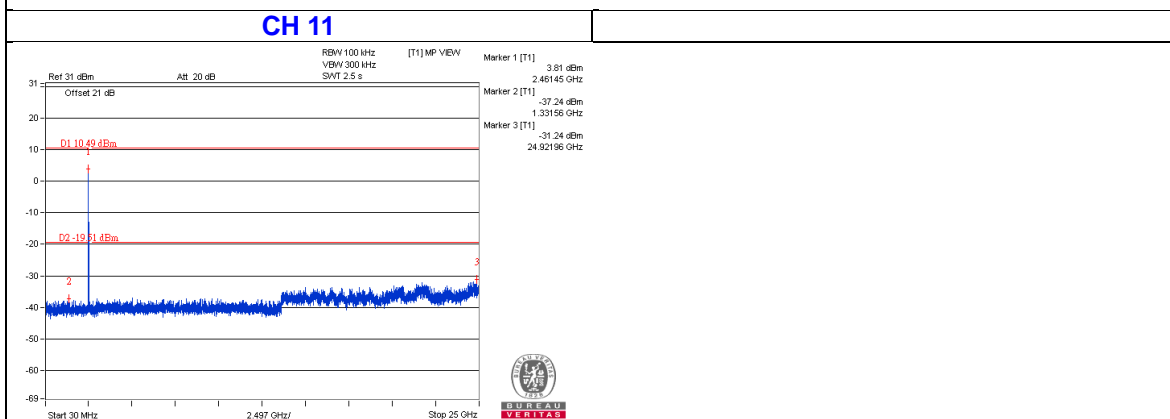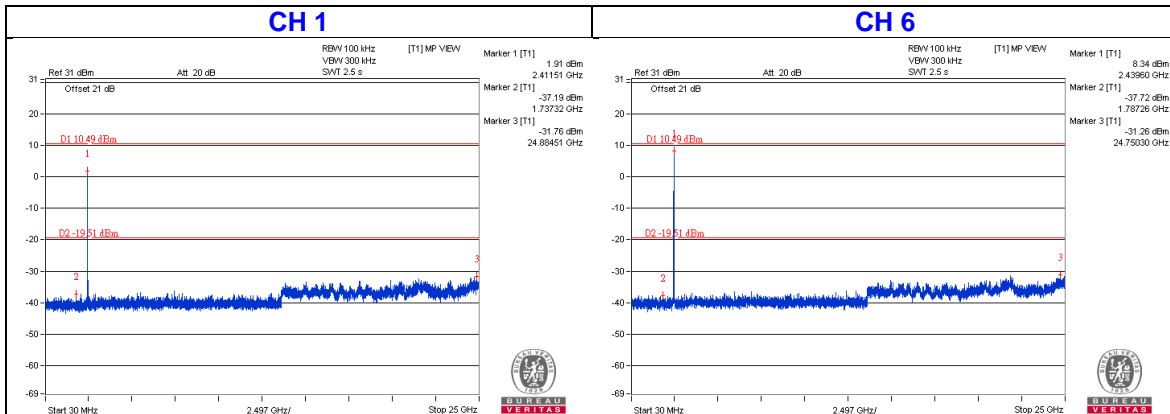

### Chain 3

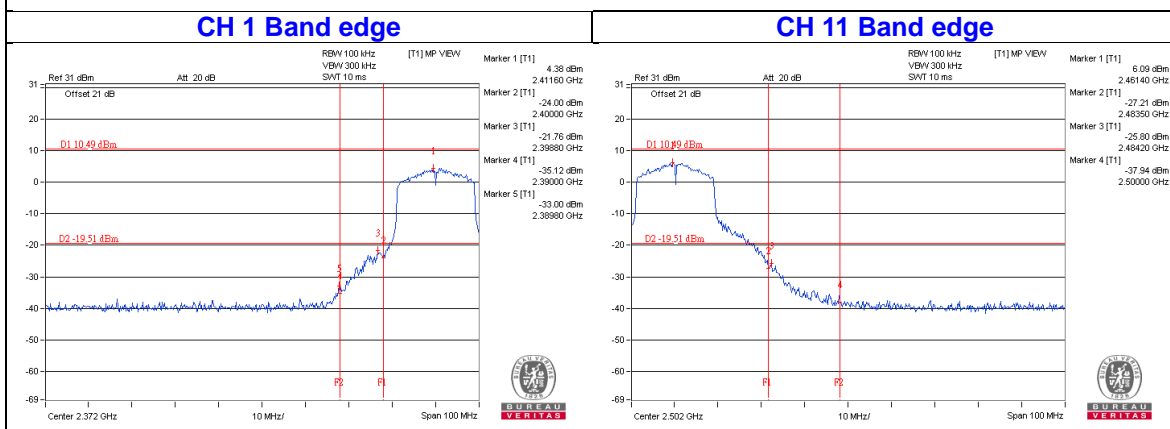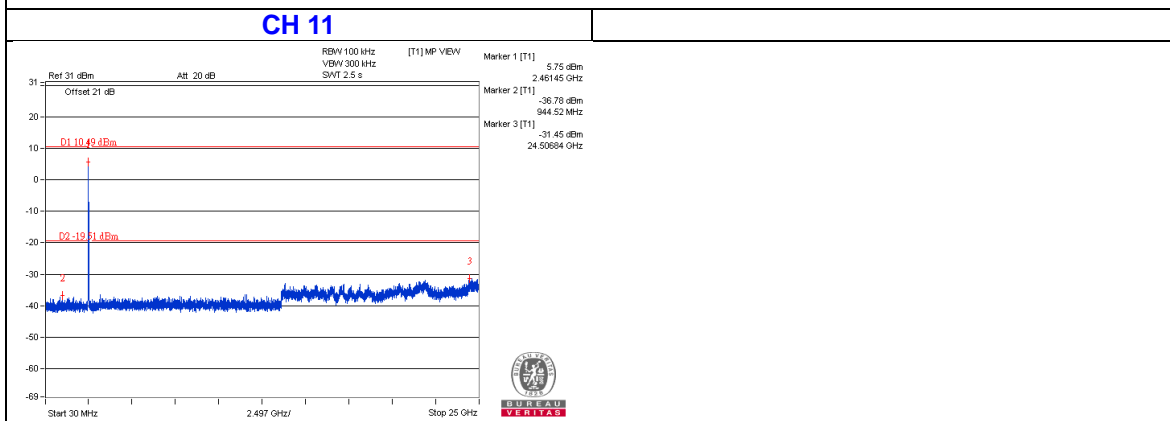
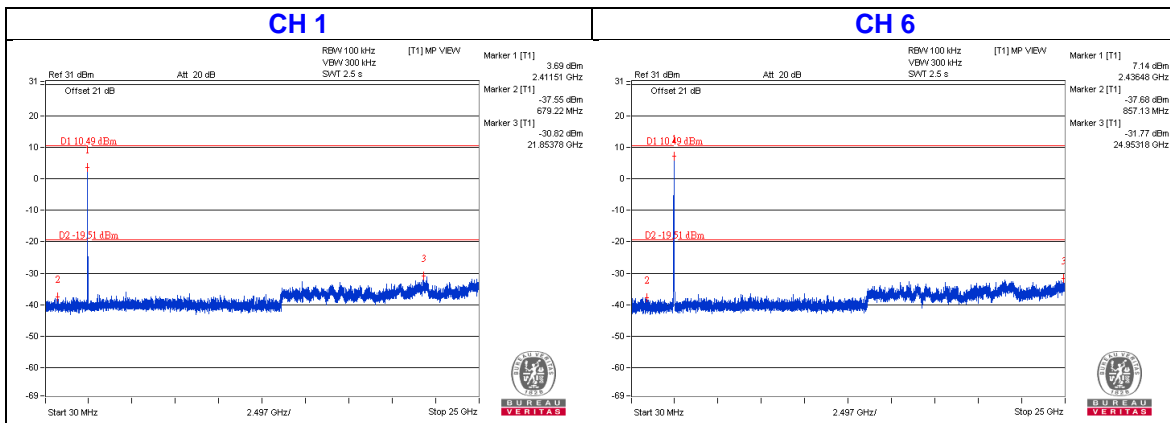


802.11n (HT40)


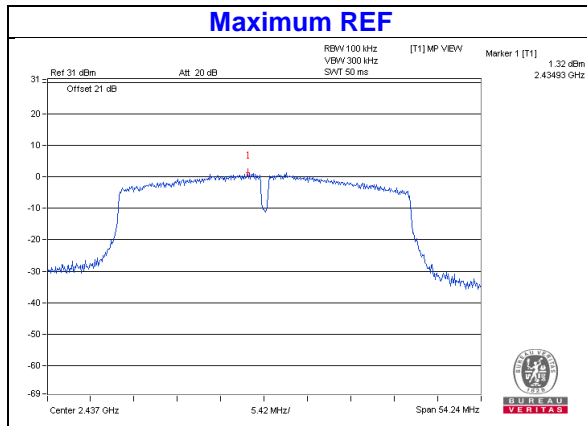


Chain 0

CH 3 CH 6

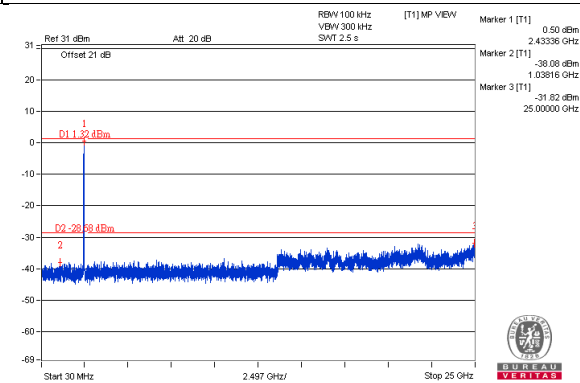
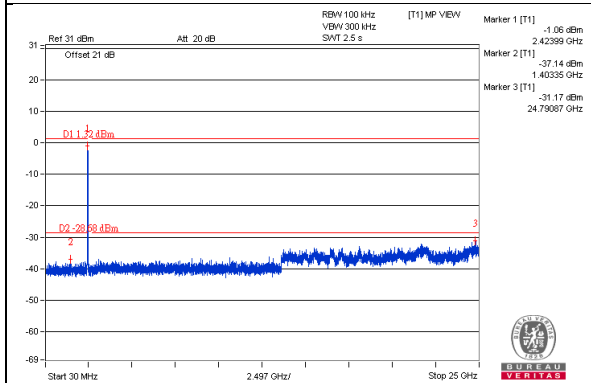


CH 9



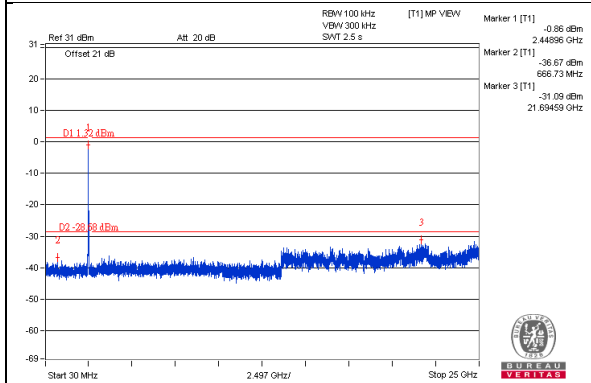


CH 3 Band edge


CH 9 Band edge

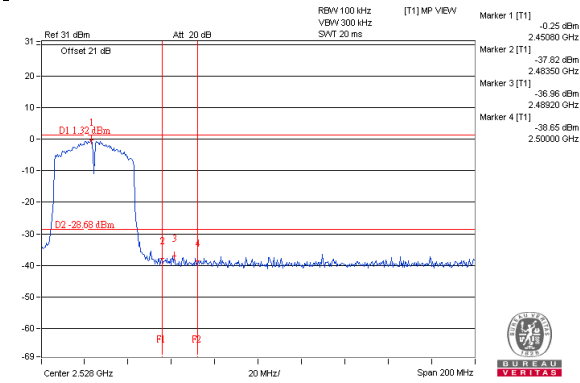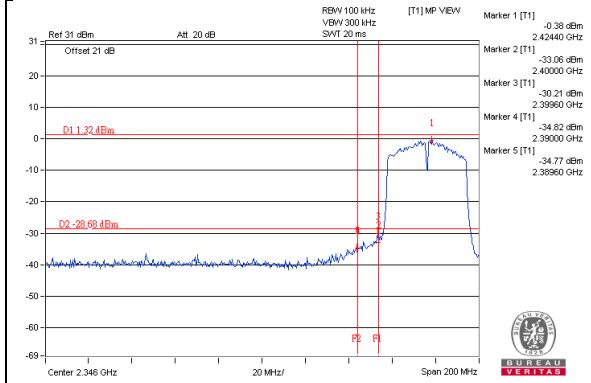




### Chain 1

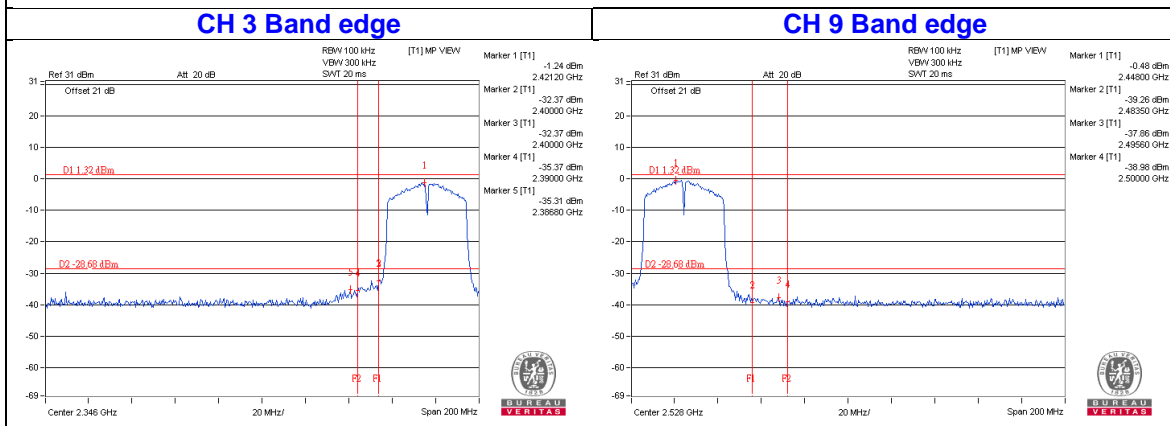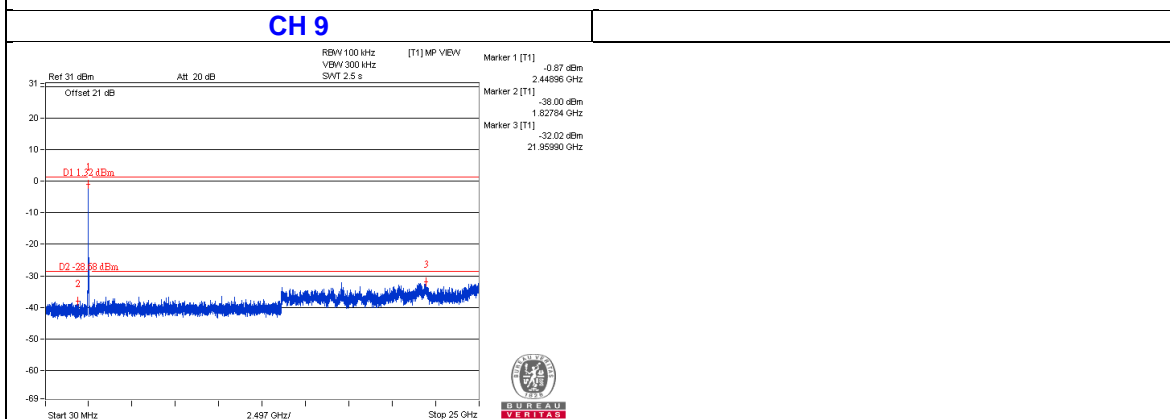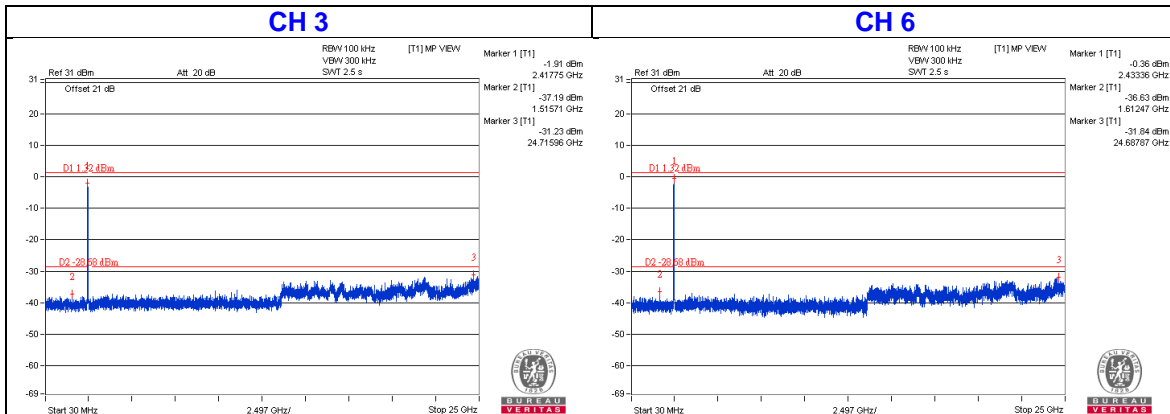

## Chain 2

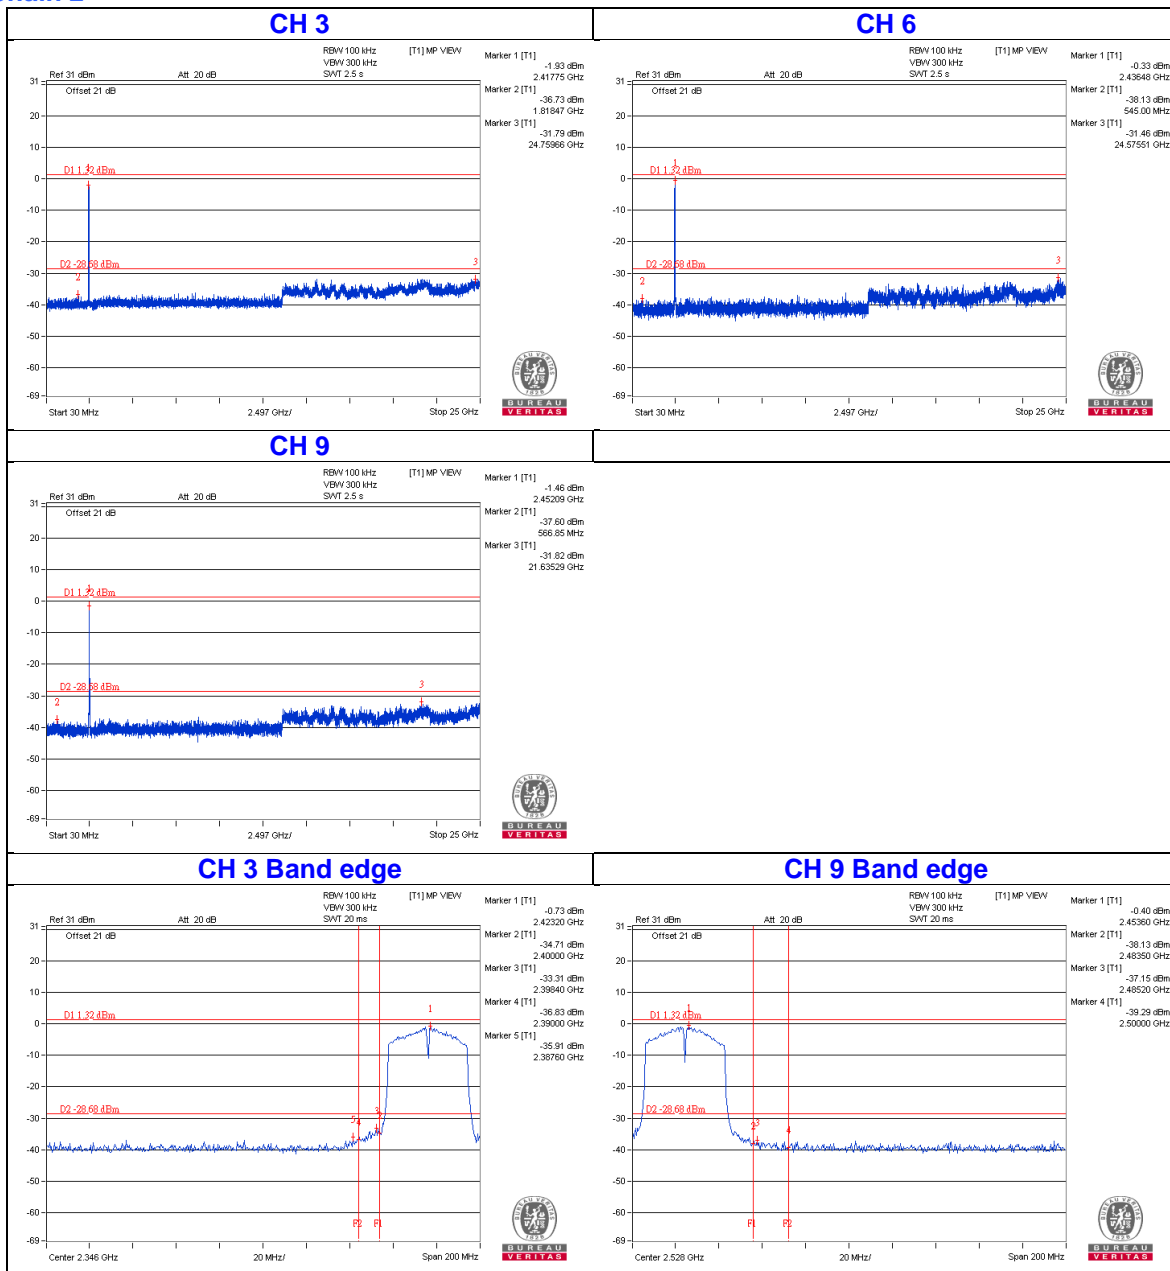

### Chain 3

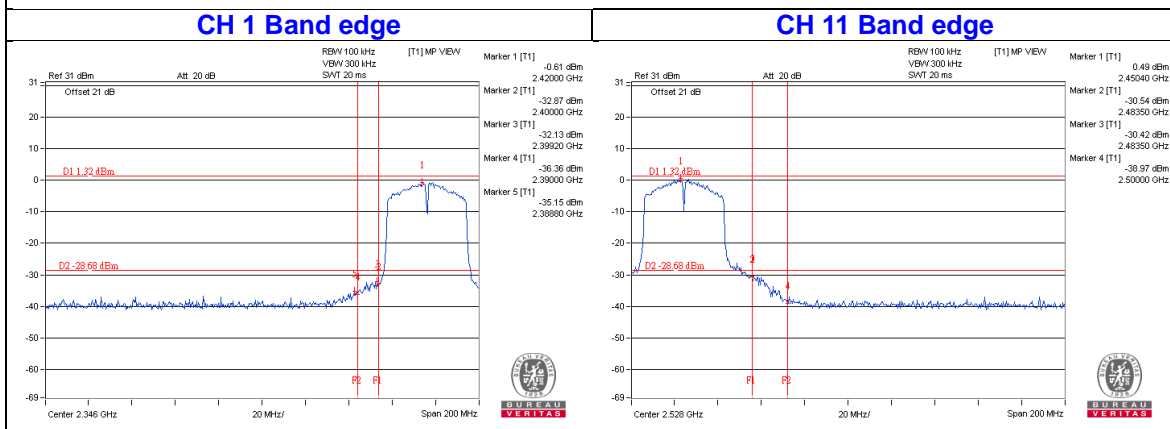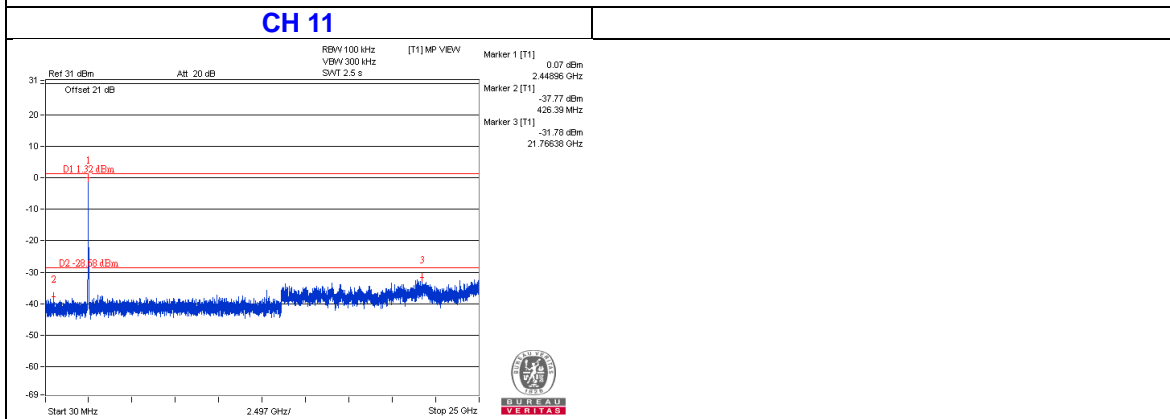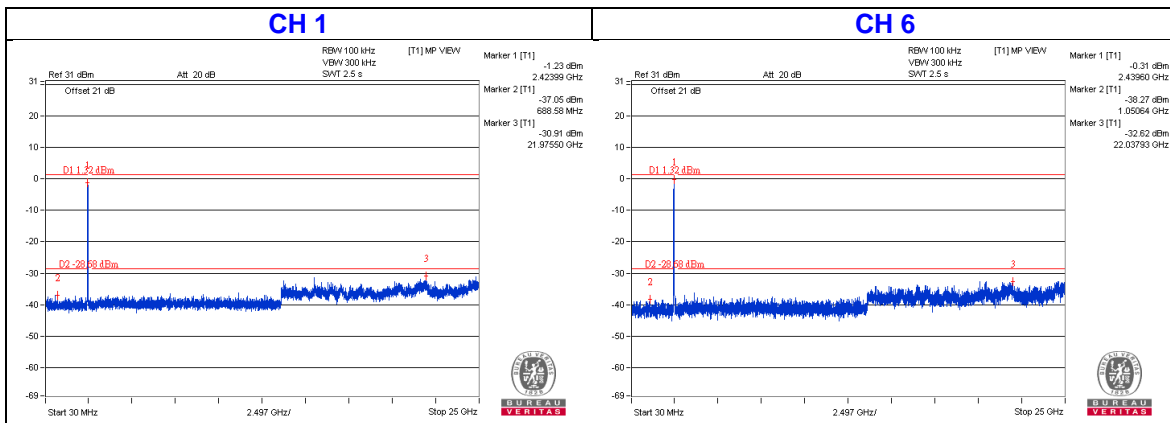

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---