

FCC Test Report

Report No.: RF181121C07-1

FCC ID: KA2IR3060A1

Test Model: DIR-3060

Series Model: DIR-3040 (Refer to item 3.1 for the more details)

Received Date: Feb. 14, 2019

Test Date: Mar. 04 ~ Mar. 20, 2019

Issued Date: Apr. 02, 2019

Applicant: D-Link Corporation

Address: 17595 Mt. Herrmann, Fountain Valley, California, United States, 92708

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	18
4.1.5 Test Set Up	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement	40
4.2.1 Limits of Conducted Emission Measurement	40
4.2.2 Test Instruments	40
4.2.3 Test Procedures.....	41
4.2.4 Deviation from Test Standard	41
4.2.5 Test Setup.....	41
4.2.6 EUT Operating Conditions.....	41
4.2.7 Test Results	42
4.3 Transmit Power Measurement	44
4.3.1 Limits of Transmit Power Measurement	44
4.3.2 Test Setup.....	44
4.3.3 Test Instruments	45
4.3.4 Test Procedure	45
4.3.5 Deviation from Test Standard	45
4.3.6 EUT Operating Conditions.....	45
4.3.7 Test Result.....	46
4.4 Occupied Bandwidth Measurement	52
4.4.1 Test Setup.....	52
4.4.2 Test Instruments	52
4.4.3 Test Procedure	52
4.4.4 Test Result.....	53
4.5 Peak Power Spectral Density Measurement	55
4.5.1 Limits of Peak Power Spectral Density Measurement	55
4.5.2 Test Setup.....	55
4.5.3 Test Instruments	55
4.5.4 Test Procedures.....	56
4.5.5 Deviation from Test Standard	56
4.5.6 EUT Operating Conditions.....	56
4.5.7 Test Results	57
4.6 Frequency Stability.....	63
4.6.1 Limits of Frequency Stability Measurement	63

4.6.2	Test Setup.....	63
4.6.3	Test Instruments	63
4.6.4	Test Procedure	63
4.6.5	Deviation from Test Standard	64
4.6.6	EUT Operating Condition	64
4.6.7	Test Results	64
4.7	6dB Bandwidth Measurement.....	65
4.7.1	Limits of 6dB Bandwidth Measurement.....	65
4.7.2	Test Setup.....	65
4.7.3	Test Instruments	65
4.7.4	Test Procedure	65
4.7.5	Deviation from Test Standard	65
4.7.6	EUT Operating Condition	65
4.7.7	Test Results	66
5	Pictures of Test Arrangements.....	68
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band).....	69
	Appendix – Information of the Testing Laboratories	72

Release Control Record

Issue No.	Description	Date Issued
RF181121C07-1	Original release.	Apr. 02, 2019

1 Certificate of Conformity

Product: AC3000 Smart Mesh Wi-Fi Router

Brand: D-Link Corporation

Test Model: DIR-3060

Series Model: DIR-3040 (Refer to item 3.1 for the more details)

Sample Status: Engineering sample

Applicant: D-Link Corporation

Test Date: Mar. 04 ~ Mar. 20, 2019

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Pettie Chen , **Date:** Apr. 02, 2019
Pettie Chen / Senior Specialist

Approved by : Bruce Chen , **Date:** Apr. 02, 2019
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.10dB at 19.53516MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.
 Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC3000 Smart Mesh Wi-Fi Router
Brand	D-Link Corporation
Test Model	DIR-3060
Series Model	DIR-3040
Model Difference	Refer to note for more details
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps
Operating Frequency	5180~5240MHz, 5745~5825MHz
Number of Channel	5180~5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5745~5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	CDD Mode: 5180~5240MHz: 660.032mW 5745~5825MHz: 995.213mW Beamforming Mode: 5180~5240MHz: 619.529mW 5745~5825MHz: 248.838mW
Antenna Type	Radio 1: Dipole antenna with 4.84dBi gain Radio 2: Dipole antenna with 5.69dBi gain
Antenna Connector	NA
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. All models are listed as below. Model DIR-3060 is the representative for final test.

Brand	Model	Difference
D-Link Corporation	DIR-3060	With McAfee
	DIR-3040	Without McAfee

2. The EUT incorporates a MIMO function. Physically, the EUT provides 4 completed transmitter and 4 receivers.

Modulation Mode	Beamforming Mode	TX Function	
		Radio 1 (For 5180~5240MHz)	Radio 2 (For 5745~5825MHz)
802.11a	Not Support	2TX	4TX
802.11n (HT20)	Support	2TX	4TX
802.11n (HT40)	Support	2TX	4TX
802.11ac (VHT20)	Support	2TX	4TX
802.11ac (VHT40)	Support	2TX	4TX
802.11ac (VHT80)	Support	2TX	4TX

* The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and 802.11ac mode for VHT20/VHT40. After pre-testing, 802.11ac (VHT20/VHT40) power is lower than 802.11n (HT20/HT40), therefore 802.11n (HT20/HT40) is the worst case to representative mode in test report. (Final test mode refer section 3.2.1)

2. The EUT consumes power from the following Adapter.

Adapter	
Brand	Shenzhen Gongjin Electronics Co., Ltd
Model	S36B52-120A300-04
Input	100-240Vac, 50/60Hz, Max 1.0A
Output	5Vdc, 2.5A; 9Vdc, 1.7A; 12Vdc, 3A
Power Line	1.20m DC cable without core attached on adapter

3. 2.4GHz & 5GHz technology can transmit at same time.

3.2 Description of Test Modes

5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane (For 5180~5240MHz), X-plane (For 5745-5825MHz).

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
-	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
-	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
-	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
-	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
-	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
-	802.11ac (VHT80)		155	155	OFDM	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11n (HT40)	5180-5240	38 to 46	38	OFDM	13.5
		5745-5825	151 to 159		OFDM	13.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11n (HT40)	5180-5240	38 to 46	38	OFDM	13.5
		5745-5825	151 to 159		OFDM	13.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
-	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
-	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
-	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
-	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
-	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
-	802.11ac (VHT80)		155	155	OFDM	29.3

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE\geq1G	22 deg. C, 69% RH	120Vac, 60Hz	Willy Cheng
RE$<$1G	22 deg. C, 69% RH	120Vac, 60Hz	Adair Peng
PLC	22 deg. C, 68% RH	120Vac, 60Hz	Adair Peng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Alan Wu

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98%, duty factor is not required

Duty cycle of test signal is < 98 %, duty factor is required


For 5180~5240MHz:

802.11a: Duty cycle = $1.372/1.452 = 0.945$, Duty factor = $10 * \log(1/0.945) = 0.25$

802.11n (HT20): Duty cycle = $0.667/0.731 = 0.912$, Duty factor = $10 * \log(1/0.912) = 0.40$


802.11n (HT40): Duty cycle = $0.345/0.399 = 0.865$, Duty factor = $10 * \log(1/0.865) = 0.63$

802.11ac (VHT80): Duty cycle = $1.061/1.115 = 0.952$, Duty factor = $10 * \log(1/0.952) = 0.22$

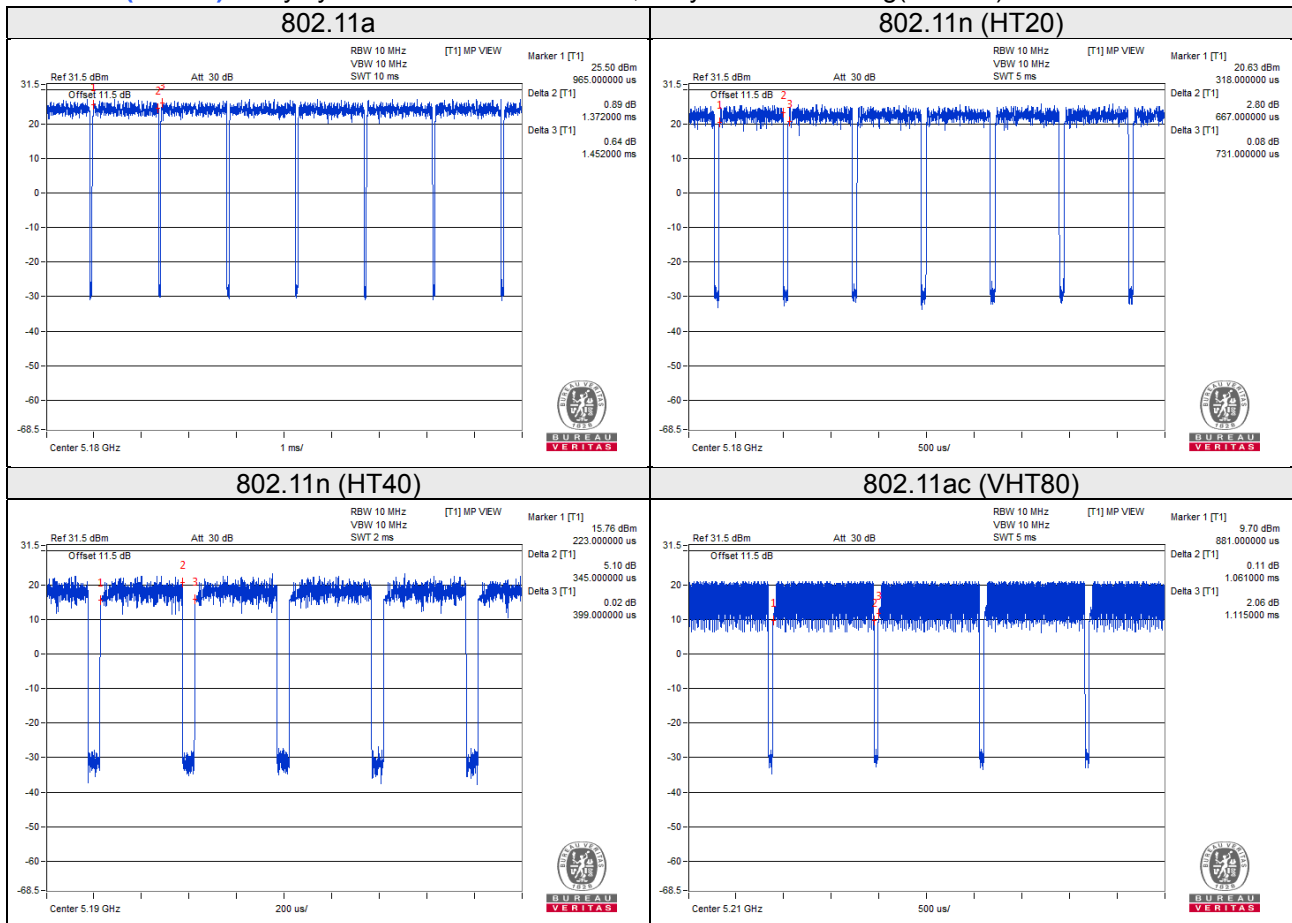

For 5745-5825MHz

Duty cycle = 100%

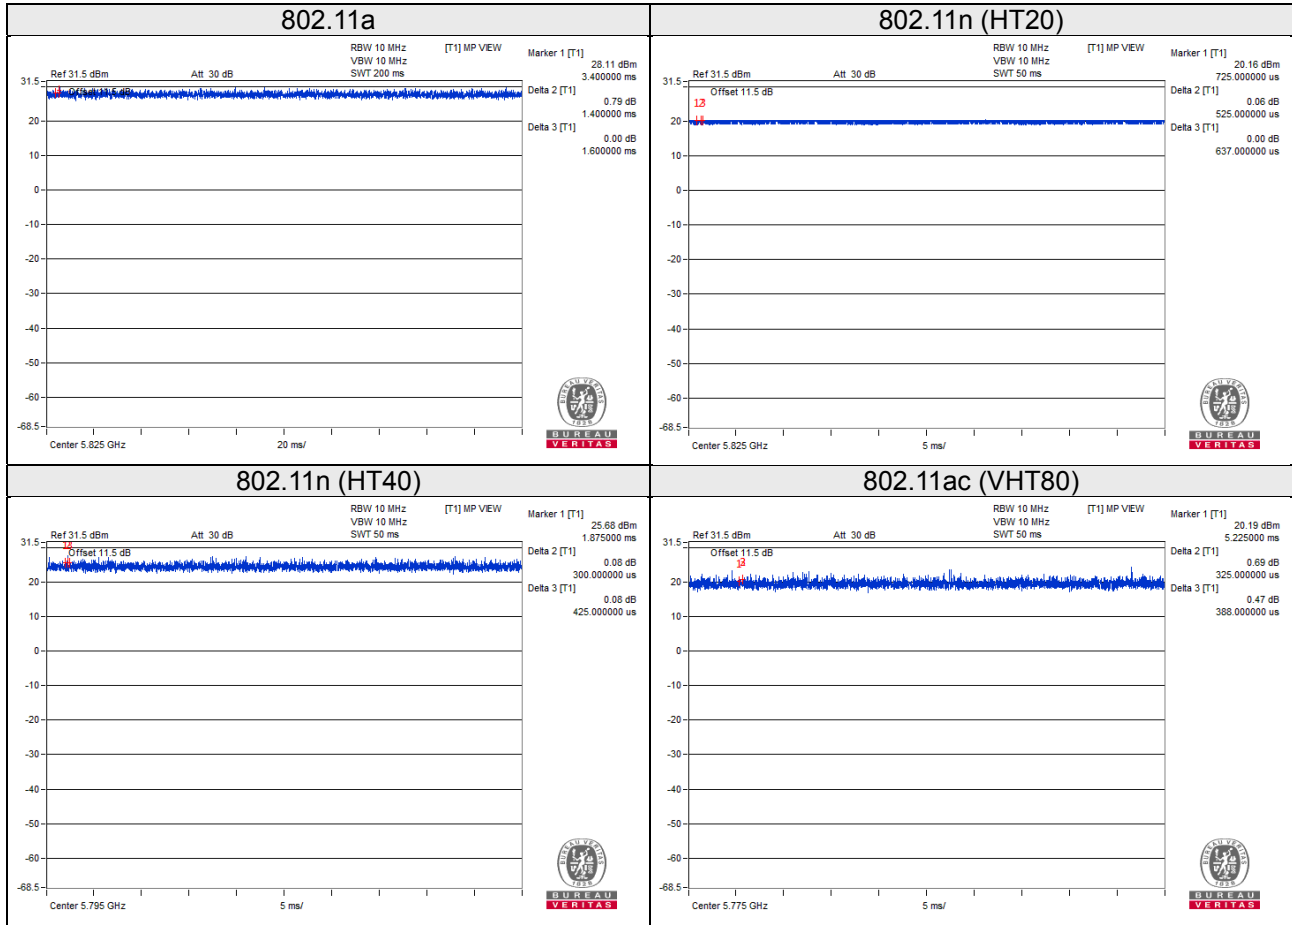

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	USB Flash	HP	v250W	01	NA	-
D.	USB Flash	Transcend	TS4GJF300	A59064 0215	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	4	1.5	N	0	Cat5e
2.	RJ45 cable	1	6	N	0	Cat5e

3.4.1 Configuration of System under Test

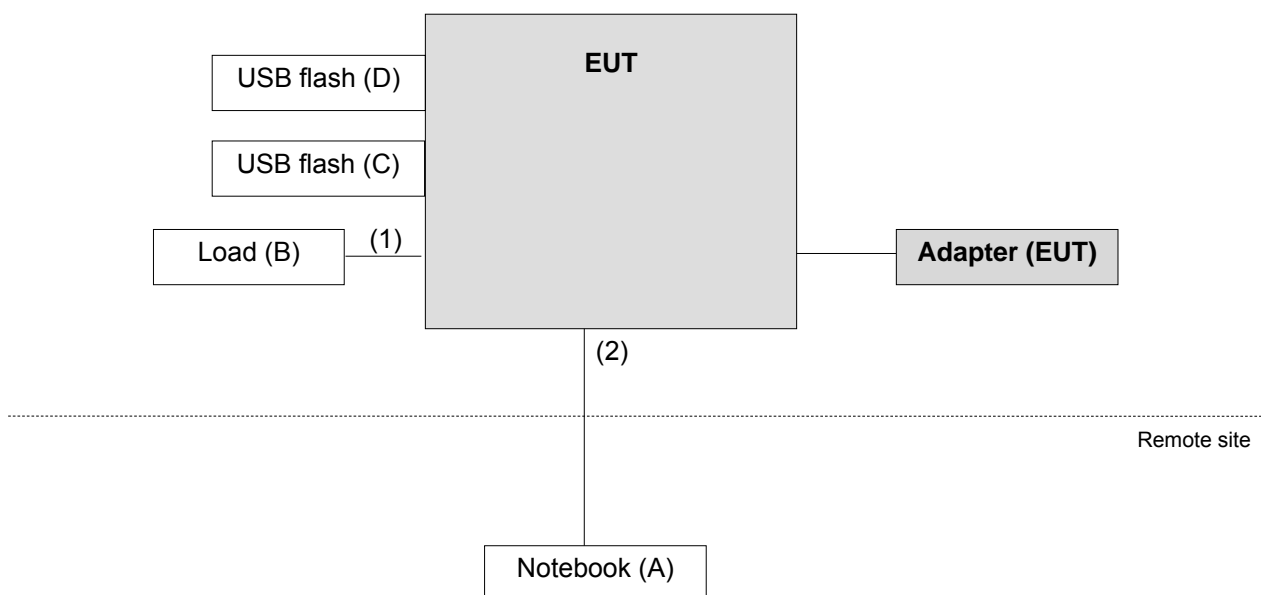

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 29, 2018	May 28, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	100115	Jan. 21, 2019	Jan. 20, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 22, 2018	Nov. 21, 2019
HORN Antenna SCHWARZBECK	9120D	209	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
Loop Antenna TESEQ	HLA 6121	45745	Jun. 14, 2018	Jun. 13, 2019
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2018	Aug. 20, 2019
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Apr. 03, 2018	Apr. 02, 2019
RF signal cable WOKEN	8D-FB	Cable-CH3-01	Aug. 21, 2018	Aug. 20, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2018	Aug. 20, 2019
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-S M-8000	Cable-CH3-03 (309224+170907)	Aug. 21, 2018	Aug. 20, 2019
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Nov. 14, 2018	Nov. 13, 2019
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY5519 0004/MY55190007/MY 55210005	Jul. 17, 2018	Jul. 16, 2019

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
5. The IC Site Registration No. is 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
(For 5180~5240MHz: 11a: RBW = 1 MHz, VBW = 1kHz; 11n (HT20): RBW = 1 MHz, VBW = 3 kHz;
11n (HT40): RBW = 1 MHz, VBW = 3 kHz; 11ac (VHT80): RBW = 1 MHz, VBW = 1 kHz;
For 5745~5825MHz: RBW = 1 MHz, VBW = 100 Hz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

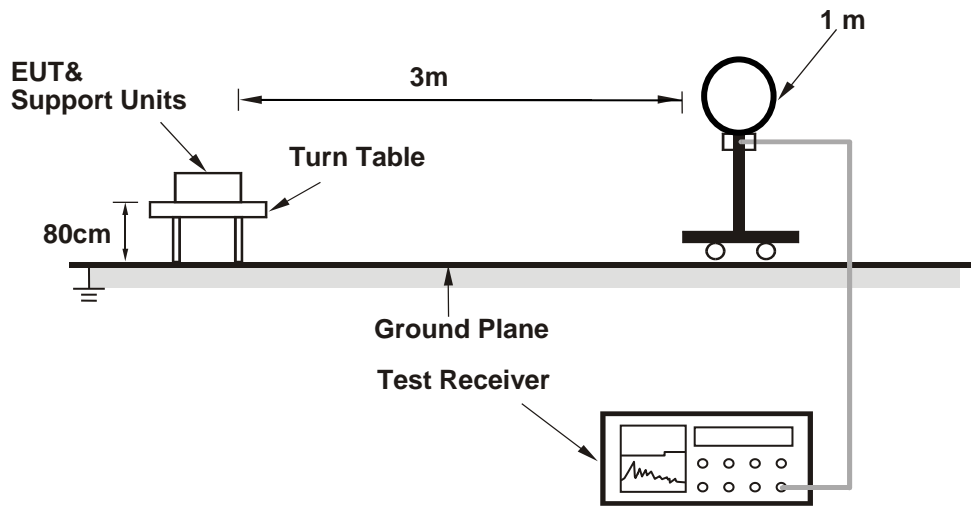

For Radiated emission 30MHz to 1GHz

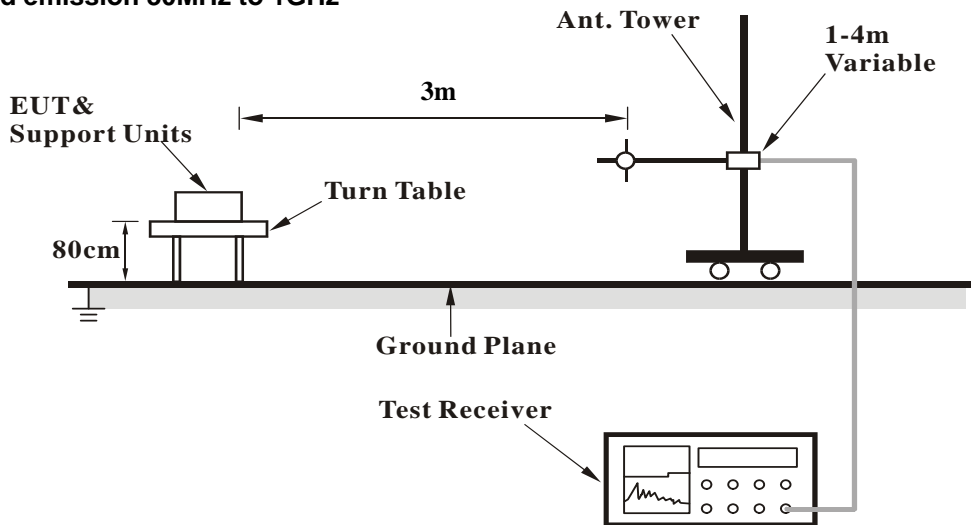

For Radiated emission above 1GHz

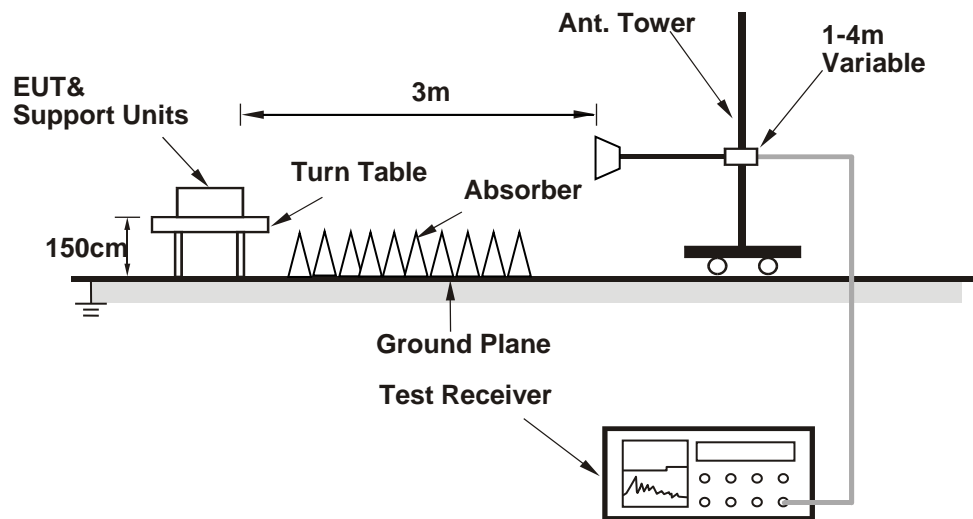

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz data:

802.11a

CHANNEL	TX Channel 36	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.9 PK	74.0	-1.1	1.67 H	336	69.0	3.9
2	5150.00	53.3 AV	54.0	-0.7	1.67 H	336	49.4	3.9
3	*5180.00	120.0 PK			2.28 H	341	80.5	39.5
4	*5180.00	110.2 AV			2.28 H	341	70.7	39.5
5	#10360.00	57.7 PK	68.2	-10.5	2.36 H	238	41.9	15.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.9 PK	74.0	-9.1	1.16 V	35	61.0	3.9
2	5150.00	46.1 AV	54.0	-7.9	1.16 V	35	42.2	3.9
3	*5180.00	111.1 PK			1.03 V	1	71.6	39.5
4	*5180.00	101.3 AV			1.03 V	1	61.8	39.5
5	#10360.00	57.1 PK	68.2	-11.1	1.43 V	184	41.3	15.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.5 PK	74.0	-2.5	1.68 H	335	67.6	3.9
2	5150.00	53.5 AV	54.0	-0.5	1.68 H	335	49.6	3.9
3	*5200.00	123.9 PK			2.09 H	341	84.4	39.5
4	*5200.00	113.9 AV			2.09 H	341	74.4	39.5
5	#10400.00	58.0 PK	68.2	-10.2	1.83 H	213	42.1	15.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.2 PK	74.0	-9.8	1.23 V	6	60.3	3.9
2	5150.00	47.5 AV	54.0	-6.5	1.23 V	6	43.6	3.9
3	*5200.00	114.2 PK			1.40 V	38	74.7	39.5
4	*5200.00	104.2 AV			1.40 V	38	64.7	39.5
5	#10400.00	57.5 PK	68.2	-10.7	1.38 V	192	41.6	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	123.2 PK			2.23 H	348	83.9	39.3
2	*5240.00	113.3 AV			2.23 H	348	74.0	39.3
3	5350.00	56.3 PK	74.0	-17.7	1.64 H	199	52.4	3.9
4	5350.00	43.1 AV	54.0	-10.9	1.64 H	199	39.2	3.9
5	#10480.00	58.6 PK	68.2	-9.6	2.69 H	194	41.8	16.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	113.6 PK			1.30 V	37	74.3	39.3
2	*5240.00	103.6 AV			1.30 V	37	64.3	39.3
3	5350.00	55.7 PK	74.0	-18.3	1.14 V	13	51.8	3.9
4	5350.00	43.2 AV	54.0	-10.8	1.14 V	13	39.3	3.9
5	#10480.00	58.0 PK	68.2	-10.2	2.13 V	235	41.2	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.31	55.9 PK	68.2	-12.3	1.37 H	307	51.7	4.2
2	#5650.00	56.6 PK	68.2	-11.6	1.42 H	323	52.4	4.2
3	*5745.00	110.4 PK			1.37 H	307	70.3	40.1
4	*5745.00	100.3 AV			1.37 H	307	60.2	40.1
5	#5933.97	57.3 PK	68.2	-10.9	1.37 H	307	52.4	4.9
6	11490.00	57.7 PK	74.0	-16.3	2.36 H	196	40.1	17.6
7	11490.00	44.1 AV	54.0	-9.9	2.36 H	196	26.5	17.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.00	66.2 PK	68.2	-2.0	1.77 V	132	62.0	4.2
2	#5650.00	67.7 PK	68.2	-0.5	1.77 V	208	63.5	4.2
3	*5745.00	125.3 PK			1.77 V	132	85.2	40.1
4	*5745.00	115.0 AV			1.77 V	132	74.9	40.1
5	#5932.05	59.9 PK	68.2	-8.3	1.77 V	132	55.0	4.9
6	11490.00	57.9 PK	74.0	-16.1	2.96 V	195	40.3	17.6
7	11490.00	44.7 AV	54.0	-9.3	2.96 V	195	27.1	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.03	54.9 PK	68.2	-13.3	1.52 H	308	50.6	4.3
2	#5650.00	55.8 PK	68.2	-12.4	1.60 H	323	51.6	4.2
3	*5785.00	113.0 PK			1.52 H	308	72.7	40.3
4	*5785.00	102.4 AV			1.52 H	308	62.1	40.3
5	#5974.36	56.7 PK	68.2	-11.5	1.52 H	308	51.6	5.1
6	11570.00	58.5 PK	74.0	-15.5	1.86 H	152	41.0	17.5
7	11570.00	45.4 AV	54.0	-8.6	1.86 H	152	27.9	17.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.69	64.1 PK	68.2	-4.1	1.77 V	132	59.9	4.2
2	#5650.00	66.4 PK	68.2	-1.8	1.71 V	250	62.2	4.2
3	*5785.00	126.6 PK			1.77 V	132	86.3	40.3
4	*5785.00	115.9 AV			1.77 V	132	75.6	40.3
5	#5928.21	61.7 PK	68.2	-6.5	1.77 V	132	56.8	4.9
6	11570.00	58.3 PK	74.0	-15.7	2.36 V	221	40.8	17.5
7	11570.00	44.6 AV	54.0	-9.4	2.36 V	221	27.1	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5618.59	56.6 PK	68.2	-11.6	1.50 H	303	52.3	4.3
2	*5825.00	110.8 PK			1.50 H	303	70.4	40.4
3	*5825.00	100.6 AV			1.50 H	303	60.2	40.4
4	#5925.00	58.9 PK	68.2	-9.3	1.37 H	315	54.0	4.9
5	#5969.87	58.1 PK	68.2	-10.1	1.50 H	303	53.1	5.0
6	11650.00	60.3 PK	74.0	-13.7	2.43 H	169	43.2	17.1
7	11650.00	47.8 AV	54.0	-6.2	2.43 H	169	30.7	17.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.82	63.0 PK	68.2	-5.2	1.86 V	133	58.7	4.3
2	*5825.00	127.7 PK			1.86 V	133	87.3	40.4
3	*5825.00	117.1 AV			1.86 V	133	76.7	40.4
4	#5925.00	65.9 PK	68.2	-2.3	1.91 V	149	61.0	4.9
5	#5953.21	63.8 PK	68.2	-4.4	1.86 V	133	58.9	4.9
6	11650.00	61.6 PK	74.0	-12.4	2.62 V	196	44.5	17.1
7	11650.00	48.4 AV	54.0	-5.6	2.62 V	196	31.3	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.0 PK	74.0	-2.0	2.00 H	341	68.1	3.9
2	5150.00	53.4 AV	54.0	-0.6	2.00 H	341	49.5	3.9
3	*5180.00	118.9 PK			2.26 H	341	79.4	39.5
4	*5180.00	107.8 AV			2.26 H	341	68.3	39.5
5	#10360.00	57.6 PK	68.2	-10.6	1.92 H	283	41.8	15.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.02 V	3	63.4	3.9
2	5150.00	47.4 AV	54.0	-6.6	1.02 V	3	43.5	3.9
3	*5180.00	110.7 PK			1.00 V	88	71.2	39.5
4	*5180.00	100.7 AV			1.00 V	88	61.2	39.5
5	#10360.00	57.1 PK	68.2	-11.1	2.32 V	211	41.3	15.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	1.99 H	341	64.2	3.9
2	5150.00	53.7 AV	54.0	-0.3	1.99 H	341	49.8	3.9
3	*5200.00	122.2 PK			1.94 H	342	82.7	39.5
4	*5200.00	111.6 AV			1.94 H	342	72.1	39.5
5	#10400.00	57.4 PK	68.2	-10.8	2.69 H	253	41.5	15.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.1 PK	74.0	-12.9	1.07 V	8	57.2	3.9
2	5150.00	48.5 AV	54.0	-5.5	1.07 V	8	44.6	3.9
3	*5200.00	114.4 PK			1.00 V	82	74.9	39.5
4	*5200.00	104.6 AV			1.00 V	82	65.1	39.5
5	#10400.00	57.3 PK	68.2	-10.9	2.18 V	162	41.4	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	123.0 PK			2.23 H	348	83.7	39.3
2	*5240.00	112.1 AV			2.23 H	348	72.8	39.3
3	5350.00	56.5 PK	74.0	-17.5	2.39 H	355	52.6	3.9
4	5350.00	43.8 AV	54.0	-10.2	2.39 H	355	39.9	3.9
5	#10480.00	58.2 PK	68.2	-10.0	2.81 H	233	41.4	16.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.6 PK			1.29 V	34	73.3	39.3
2	*5240.00	102.3 AV			1.29 V	34	63.0	39.3
3	5350.00	55.6 PK	74.0	-18.4	1.42 V	69	51.7	3.9
4	5350.00	43.5 AV	54.0	-10.5	1.42 V	69	39.6	3.9
5	#10480.00	57.9 PK	68.2	-10.3	1.56 V	179	41.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.03	54.9 PK	68.2	-13.3	1.36 H	309	50.6	4.3
2	#5650.00	56.1 PK	68.2	-12.1	1.28 H	319	51.9	4.2
3	*5745.00	110.7 PK			1.36 H	309	70.6	40.1
4	*5745.00	100.0 AV			1.36 H	309	59.9	40.1
5	#5937.82	57.1 PK	68.2	-11.1	1.36 H	309	52.2	4.9
6	11490.00	57.8 PK	74.0	-16.2	2.89 H	162	40.2	17.6
7	11490.00	44.3 AV	54.0	-9.7	2.89 H	162	26.7	17.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5623.08	65.9 PK	68.2	-2.3	1.78 V	132	61.7	4.2
2	#5650.00	68.0 PK	68.2	-0.2	1.77 V	207	63.8	4.2
3	*5745.00	125.0 PK			1.78 V	132	84.9	40.1
4	*5745.00	114.4 AV			1.78 V	132	74.3	40.1
5	#5926.28	60.6 PK	68.2	-7.6	1.78 V	132	55.7	4.9
6	11490.00	58.1 PK	74.0	-15.9	2.39 V	298	40.5	17.6
7	11490.00	44.4 AV	54.0	-9.6	2.39 V	298	26.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5626.92	54.8 PK	68.2	-13.4	1.55 H	309	50.6	4.2
2	#5650.00	56.0 PK	68.2	-12.2	1.67 H	291	51.8	4.2
3	*5785.00	113.2 PK			1.55 H	309	72.9	40.3
4	*5785.00	102.3 AV			1.55 H	309	62.0	40.3
5	#5976.92	56.6 PK	68.2	-11.6	1.55 H	309	51.5	5.1
6	11570.00	59.0 PK	74.0	-15.0	1.74 H	232	41.5	17.5
7	11570.00	44.9 AV	54.0	-9.1	1.74 H	232	27.4	17.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5637.18	64.2 PK	68.2	-4.0	1.77 V	132	60.0	4.2
2	#5650.00	66.6 PK	68.2	-1.6	1.75 V	207	62.4	4.2
3	*5785.00	126.6 PK			1.77 V	132	86.3	40.3
4	*5785.00	116.0 AV			1.77 V	132	75.7	40.3
5	#5925.64	61.8 PK	68.2	-6.4	1.77 V	132	56.9	4.9
6	11570.00	59.3 PK	74.0	-14.7	2.39 V	286	41.8	17.5
7	11570.00	45.1 AV	54.0	-8.9	2.39 V	286	27.6	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5623.08	56.3 PK	68.2	-11.9	1.48 H	310	52.1	4.2
2	*5825.00	111.2 PK			1.48 H	310	70.8	40.4
3	*5825.00	100.6 AV			1.48 H	310	60.2	40.4
4	#5925.00	58.5 PK	68.2	-9.7	1.53 H	289	53.6	4.9
5	#5969.23	59.4 PK	68.2	-8.8	1.48 H	310	54.4	5.0
6	11650.00	60.8 PK	74.0	-13.2	2.22 H	171	43.7	17.1
7	11650.00	47.3 AV	54.0	-6.7	2.22 H	171	30.2	17.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5640.38	63.4 PK	68.2	-4.8	1.81 V	132	59.2	4.2
2	*5825.00	127.2 PK			1.81 V	132	86.8	40.4
3	*5825.00	116.8 AV			1.81 V	132	76.4	40.4
4	#5925.00	65.3 PK	68.2	-2.9	1.89 V	139	60.4	4.9
5	#5932.05	64.2 PK	68.2	-4.0	1.81 V	132	59.3	4.9
6	11650.00	61.3 PK	74.0	-12.7	2.71 V	203	44.2	17.1
7	11650.00	48.2 AV	54.0	-5.8	2.71 V	203	31.1	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.9 PK	74.0	-1.1	1.99 H	340	69.0	3.9
2	5150.00	53.9 AV	54.0	-0.1	1.99 H	340	50.0	3.9
3	*5190.00	115.6 PK			2.22 H	341	76.1	39.5
4	*5190.00	103.9 AV			2.22 H	341	64.4	39.5
5	#10380.00	57.2 PK	68.2	-11.0	1.58 H	241	41.3	15.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	1.21 V	5	63.7	3.9
2	5150.00	48.6 AV	54.0	-5.4	1.21 V	5	44.7	3.9
3	*5190.00	108.1 PK			1.00 V	84	68.6	39.5
4	*5190.00	97.4 AV			1.00 V	84	57.9	39.5
5	#10380.00	56.9 PK	68.2	-11.3	1.62 V	157	41.0	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.6 PK	74.0	-5.4	2.25 H	340	64.7	3.9
2	5150.00	53.7 AV	54.0	-0.3	2.25 H	340	49.8	3.9
3	*5230.00	118.0 PK			2.06 H	344	78.7	39.3
4	*5230.00	106.9 AV			2.06 H	344	67.6	39.3
5	5350.00	56.6 PK	74.0	-17.4	1.98 H	323	52.7	3.9
6	5350.00	44.0 AV	54.0	-10.0	1.98 H	323	40.1	3.9
7	#10460.00	58.1 PK	68.2	-10.1	2.72 H	251	41.5	16.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.2 PK	74.0	-9.8	1.07 V	4	60.3	3.9
2	5150.00	49.3 AV	54.0	-4.7	1.07 V	4	45.4	3.9
3	*5230.00	109.4 PK			1.32 V	38	70.1	39.3
4	*5230.00	98.1 AV			1.32 V	38	58.8	39.3
5	5350.00	56.3 PK	74.0	-17.7	2.43 V	158	52.4	3.9
6	5350.00	43.8 AV	54.0	-10.2	2.43 V	158	39.9	3.9
7	#10460.00	57.9 PK	68.2	-10.3	2.23 V	286	41.3	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.26	55.1 PK	68.2	-13.1	1.60 H	308	50.8	4.3
2	#5650.00	56.0 PK	68.2	-12.2	1.68 H	341	51.8	4.2
3	*5755.00	108.6 PK			1.60 H	308	68.5	40.1
4	*5755.00	97.7 AV			1.60 H	308	57.6	40.1
5	#5985.26	56.6 PK	68.2	-11.6	1.60 H	308	51.5	5.1
6	11510.00	58.3 PK	74.0	-15.7	2.37 H	158	40.6	17.7
7	11510.00	44.4 AV	54.0	-9.6	2.37 H	158	26.7	17.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.03	63.8 PK	68.2	-4.4	1.77 V	131	59.5	4.3
2	#5650.00	66.2 PK	68.2	-2.0	1.63 V	132	62.0	4.2
3	*5755.00	121.8 PK			1.77 V	131	81.7	40.1
4	*5755.00	111.6 AV			1.77 V	131	71.5	40.1
5	#5955.13	59.8 PK	68.2	-8.4	1.77 V	131	54.9	4.9
6	11510.00	58.3 PK	74.0	-15.7	2.69 V	235	40.6	17.7
7	11510.00	44.5 AV	54.0	-9.5	2.69 V	235	26.8	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5631.41	54.5 PK	68.2	-13.7	1.33 H	308	50.3	4.2
2	*5795.00	109.0 PK			1.33 H	308	68.6	40.4
3	*5795.00	98.2 AV			1.33 H	308	57.8	40.4
4	#5985.90	56.8 PK	68.2	-11.4	1.33 H	308	51.7	5.1
5	11590.00	59.3 PK	74.0	-14.7	1.83 H	221	41.8	17.5
6	11590.00	45.5 AV	54.0	-8.5	1.83 H	221	28.0	17.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5626.92	63.0 PK	68.2	-5.2	1.83 V	132	58.8	4.2
2	*5795.00	122.8 PK			1.83 V	132	82.4	40.4
3	*5795.00	112.0 AV			1.83 V	132	71.6	40.4
4	#5930.77	60.5 PK	68.2	-7.7	1.83 V	132	55.6	4.9
5	11590.00	59.7 PK	74.0	-14.3	2.32 V	186	42.2	17.5
6	11590.00	45.8 AV	54.0	-8.2	2.32 V	186	28.3	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.1 PK	74.0	-6.9	2.25 H	339	63.2	3.9
2	5150.00	53.4 AV	54.0	-0.6	2.25 H	339	49.5	3.9
3	*5210.00	110.6 PK			1.90 H	341	71.2	39.4
4	*5210.00	100.9 AV			1.90 H	341	61.5	39.4
5	5350.00	56.4 PK	74.0	-17.6	1.93 H	285	52.5	3.9
6	5350.00	44.3 AV	54.0	-9.7	1.93 H	285	40.4	3.9
7	#10420.00	57.8 PK	68.2	-10.4	1.84 H	143	41.6	16.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.4 PK	74.0	-12.6	1.31 V	6	57.5	3.9
2	5150.00	48.6 AV	54.0	-5.4	1.31 V	6	44.7	3.9
3	*5210.00	101.4 PK			1.34 V	37	62.0	39.4
4	*5210.00	91.4 AV			1.34 V	37	52.0	39.4
5	5350.00	56.7 PK	74.0	-17.3	1.62 V	33	52.8	3.9
6	5350.00	44.9 AV	54.0	-9.1	1.62 V	33	41.0	3.9
7	#10420.00	57.4 PK	68.2	-10.8	1.96 V	151	41.2	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.64	54.7 PK	68.2	-13.5	1.56 H	308	50.4	4.3
2	#5650.00	55.4 PK	68.2	-12.8	1.72 H	315	51.2	4.2
3	*5775.00	103.7 PK			1.56 H	308	63.4	40.3
4	*5775.00	92.6 AV			1.56 H	308	52.3	40.3
5	#5925.00	57.7 PK	68.2	-10.5	1.22 H	256	52.8	4.9
6	#5982.05	56.9 PK	68.2	-11.3	1.56 H	308	51.8	5.1
7	11550.00	58.9 PK	74.0	-15.1	2.36 H	185	41.3	17.6
8	11550.00	45.6 AV	54.0	-8.4	2.36 H	185	28.0	17.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5629.49	62.0 PK	68.2	-6.2	1.80 V	132	57.8	4.2
2	#5650.00	64.0 PK	68.2	-4.2	1.76 V	207	59.8	4.2
3	*5775.00	117.7 PK			1.80 V	132	77.4	40.3
4	*5775.00	106.8 AV			1.80 V	132	66.5	40.3
5	#5925.00	60.5 PK	68.2	-7.7	2.13 V	259	55.6	4.9
6	#5933.33	59.5 PK	68.2	-8.7	1.80 V	132	54.6	4.9
7	11550.00	59.1 PK	74.0	-14.9	2.96 V	187	41.5	17.6
8	11550.00	45.7 AV	54.0	-8.3	2.96 V	187	28.1	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Worst-Case Data: 802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	28.2 QP	40.0	-11.8	1.99 H	236	38.3	-10.1
2	125.17	29.6 QP	43.5	-13.9	1.99 H	74	40.6	-11.0
3	183.50	31.2 QP	43.5	-12.3	1.51 H	84	41.8	-10.6
4	249.60	37.4 QP	46.0	-8.6	1.00 H	342	46.5	-9.1
5	374.04	30.3 QP	46.0	-15.7	1.00 H	191	36.2	-5.9
6	500.42	39.0 QP	46.0	-7.0	1.51 H	162	42.6	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

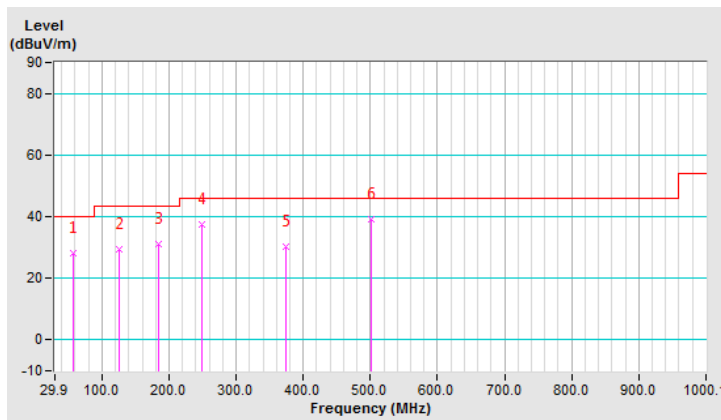


CHANNEL	TX Channel 38	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.06	35.0 QP	40.0	-5.0	1.50 V	16	45.1	-10.1
2	94.06	33.2 QP	43.5	-10.3	1.00 V	115	47.6	-14.4
3	156.28	33.3 QP	43.5	-10.2	1.00 V	122	42.4	-9.1
4	249.60	33.8 QP	46.0	-12.2	2.00 V	301	42.9	-9.1
5	374.04	31.8 QP	46.0	-14.2	1.00 V	183	37.7	-5.9
6	500.42	39.2 QP	46.0	-6.8	1.00 V	103	42.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

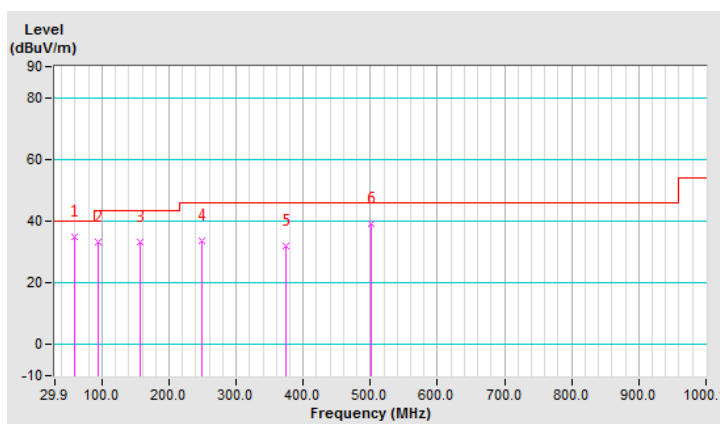

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Jan. 03, 2019	Jan. 02, 2020
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 19, 2018	Aug. 18, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

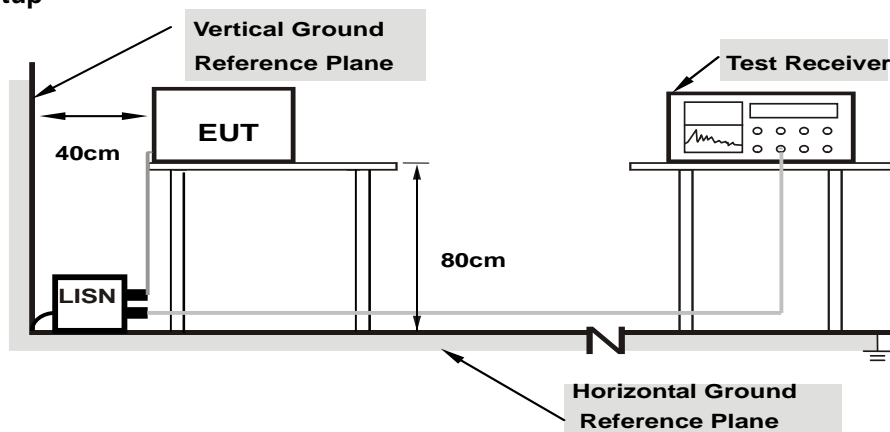

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16172	9.83	25.30	9.67	35.13	19.50	65.38
2	0.39219	9.88	24.85	16.71	34.73	26.59	58.02	48.02	-23.29	-21.43
3	1.13281	9.92	16.44	11.07	26.36	20.99	56.00	46.00	-29.64	-25.01
4	1.71875	9.94	17.52	8.74	27.46	18.68	56.00	46.00	-28.54	-27.32
5	9.53906	10.15	26.96	21.04	37.11	31.19	60.00	50.00	-22.89	-18.81
6	21.06641	10.25	38.77	33.37	49.02	43.62	60.00	50.00	-10.98	-6.38

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

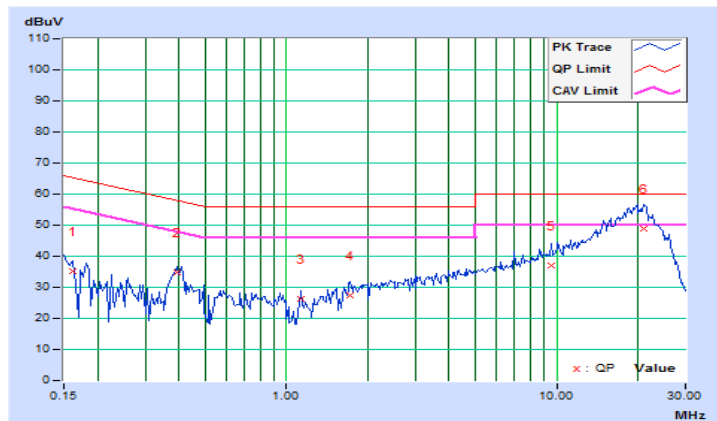


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16172	9.82	26.91	15.51	36.73	25.33	65.38
2	0.39609	9.87	29.78	21.55	39.65	31.42	57.93	47.93	-18.28	-16.51
3	1.73438	9.92	19.99	11.97	29.91	21.89	56.00	46.00	-26.09	-24.11
4	3.08984	9.97	23.07	15.66	33.04	25.63	56.00	46.00	-22.96	-20.37
5	9.59766	10.15	25.64	19.69	35.79	29.84	60.00	50.00	-24.21	-20.16
6	19.53516	10.30	41.67	36.60	51.97	46.90	60.00	50.00	-8.03	-3.10

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

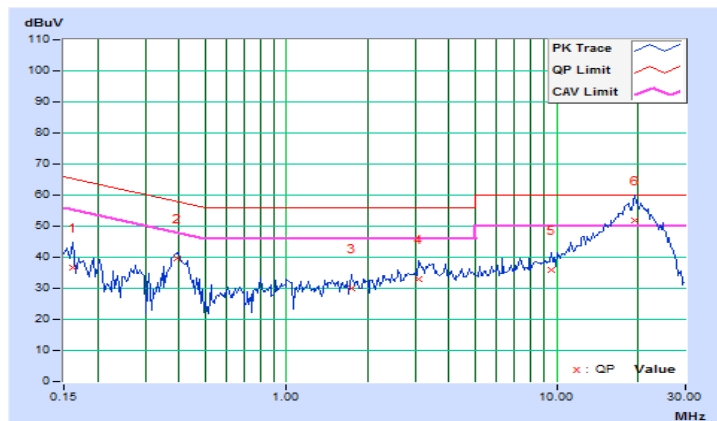

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	-		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	-		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.3.2 Test Setup

For Power Output


802.11a, 802.11n (HT20), 802.11n (HT40)

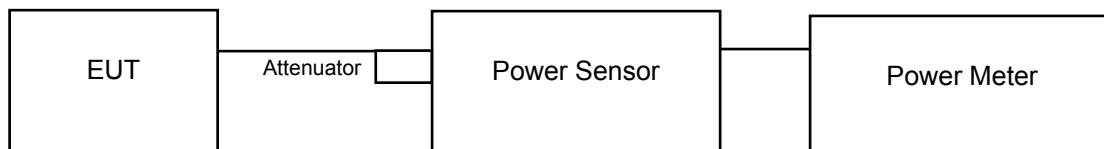

802.11ac (VHT80)



For 26dB Bandwidth



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80), 802.11ac (VHT80+VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to "free run".
- c. Set RBW = 1 MHz
- d. Set VBW \geq 3 MHz
- e. Number of points in sweep \geq 2 Span / RBW
- f. Sweep time \leq (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS
- i. Trace mode = max hold
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

For 26dB Bandwidth

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.56	21.54	285.780	24.56	30.00	Pass
40	5200	25.24	25.13	660.032	28.20	30.00	Pass
48	5240	24.17	24.16	521.831	27.18	30.00	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.52	21.05	269.256	24.30	30.00	Pass
40	5200	24.27	24.69	561.743	27.50	30.00	Pass
48	5240	24.69	25.12	619.529	27.92	30.00	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	20.39	20.07	211.021	23.24	30.00	Pass
46	5230	24.24	24.45	544.073	27.36	30.00	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	17.21	16.82	100.686	20.03	30.00	Pass

802.11a

Channel	Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	23.72	23.17	22.71	23.45	850.943	29.30	30.00	Pass
157	5785	23.45	23.11	23.89	24.51	953.347	29.79	30.00	Pass
165	5825	24.89	22.48	23.71	24.01	972.061	29.88	30.00	Pass

802.11n (HT20)

Channel	Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	23.72	23.11	22.75	23.51	852.902	29.31	30.00	Pass
157	5785	23.51	23.51	23.71	24.91	993.481	29.97	30.00	Pass
165	5825	25.29	22.02	23.72	24.19	995.213	29.98	30.00	Pass

802.11n (HT40)

Channel	Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	23.25	23.22	23.97	24.22	934.943	29.71	30.00	Pass
159	5795	23.23	23.21	24.04	23.74	909.894	29.59	30.00	Pass

802.11ac (VHT80)

Channel	Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	23.31	23.44	24.01	24.07	942.127	29.74	30.00	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.52	21.05	269.256	24.30	28.15	Pass
40	5200	24.27	24.69	561.743	27.50	28.15	Pass
48	5240	24.69	25.12	619.529	27.92	28.15	Pass

Note: Gain= 4.84dBi +10log (2) = 7.85 > 6dBi, so the power limit shall be reduced to 30-(7.85-6) = 28.15dBm.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	20.39	20.07	211.021	23.24	28.15	Pass
46	5230	24.24	24.45	544.073	27.36	28.15	Pass

Note: Gain= 4.84dBi +10log (2) = 7.85 > 6dBi, so the power limit shall be reduced to 30-(7.85-6) = 28.15dBm.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	17.21	16.82	100.686	20.03	28.15	Pass

Note: Gain= 4.84dBi +10log (2) = 7.85 > 6dBi, so the power limit shall be reduced to 30-(7.85-6) = 28.15dBm.

802.11n (HT20)

Channel	Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	17.70	17.09	16.73	17.49	213.255	23.29	24.29	Pass
157	5785	17.49	17.49	17.69	18.89	248.405	23.95	24.29	Pass
165	5825	19.27	16.00	17.70	18.17	248.838	23.96	24.29	Pass

Note: Gain= 5.69dBi +10log (4) = 11.71 > 6dBi, so the power limit shall be reduced to 30-(11.71-6) = 24.29dBm.

802.11n (HT40)

Channel	Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	17.23	17.20	17.95	18.20	233.768	23.69	24.29	Pass
159	5795	17.21	17.19	18.02	17.72	227.505	23.57	24.29	Pass

Note: Gain= 5.69dBi +10log (4) = 11.71 > 6dBi, so the power limit shall be reduced to 30-(11.71-6) = 24.29dBm.

802.11ac (VHT80)

Channel	Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	17.29	17.42	17.99	18.05	235.565	23.72	24.29	Pass

Note: Gain= 5.69dBi +10log (4) = 11.71 > 6dBi, so the power limit shall be reduced to 30-(11.71-6) = 24.29dBm.

26dB Bandwidth:

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	20.20	20.02
40	5200	30.56	26.96
48	5240	29.07	27.24

802.11n (HT20)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	20.51	20.39
40	5200	28.35	22.58
48	5240	28.03	27.47

802.11n (HT40)


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	41.94	41.52
46	5230	61.30	41.43

802.11ac (VHT80)


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	81.35	81.08

Spectrum Plot of Worst Value


802.11a

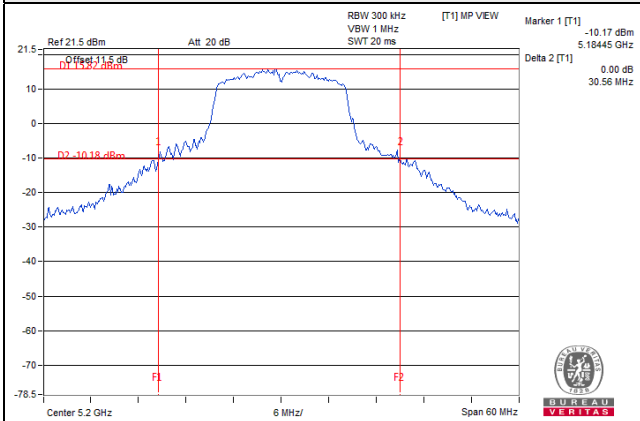


802.11n (HT20)

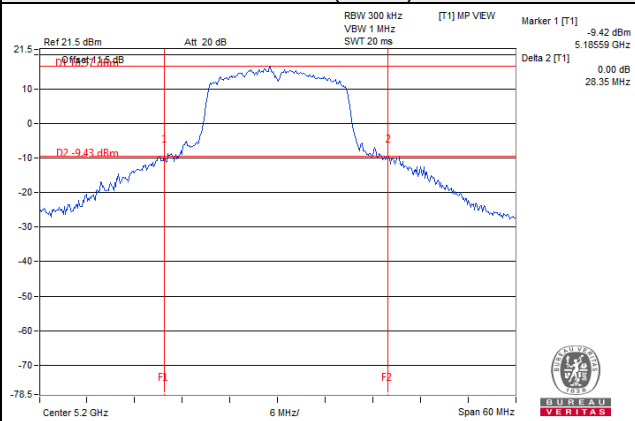

802.11n (HT40)

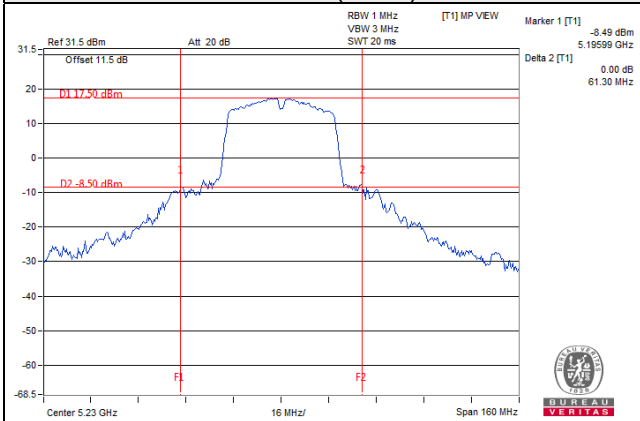


802.11ac (VHT80)

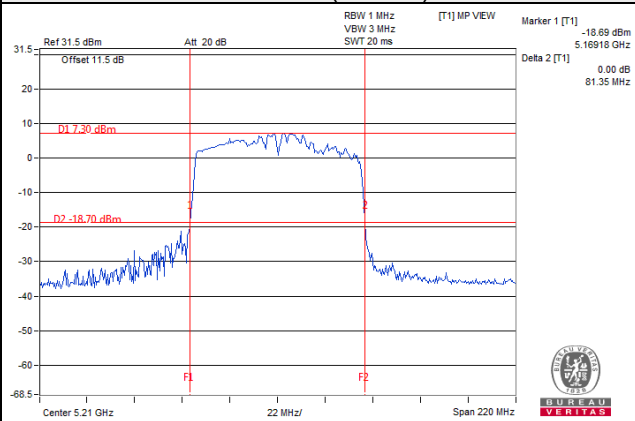

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.80	16.44
40	5200	17.52	16.68
48	5240	17.28	16.80

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	16.70	16.70	16.70	16.95
157	5785	16.80	16.92	17.04	17.28
165	5825	16.80	16.80	16.80	16.68

802.11n (HT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.64	17.64
40	5200	18.12	17.76
48	5240	17.88	17.88

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	17.76	17.76	17.88	17.88
157	5785	17.76	17.64	18.00	17.88
165	5825	17.76	17.76	17.88	17.64

802.11n (HT40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.24	36.36
46	5230	36.60	36.36

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
151	5755	36.36	36.36	36.48	36.60
159	5795	36.48	36.48	36.36	36.48

802.11ac (VHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.12	74.88

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
155	5775	75.36	75.36	75.60	75.60

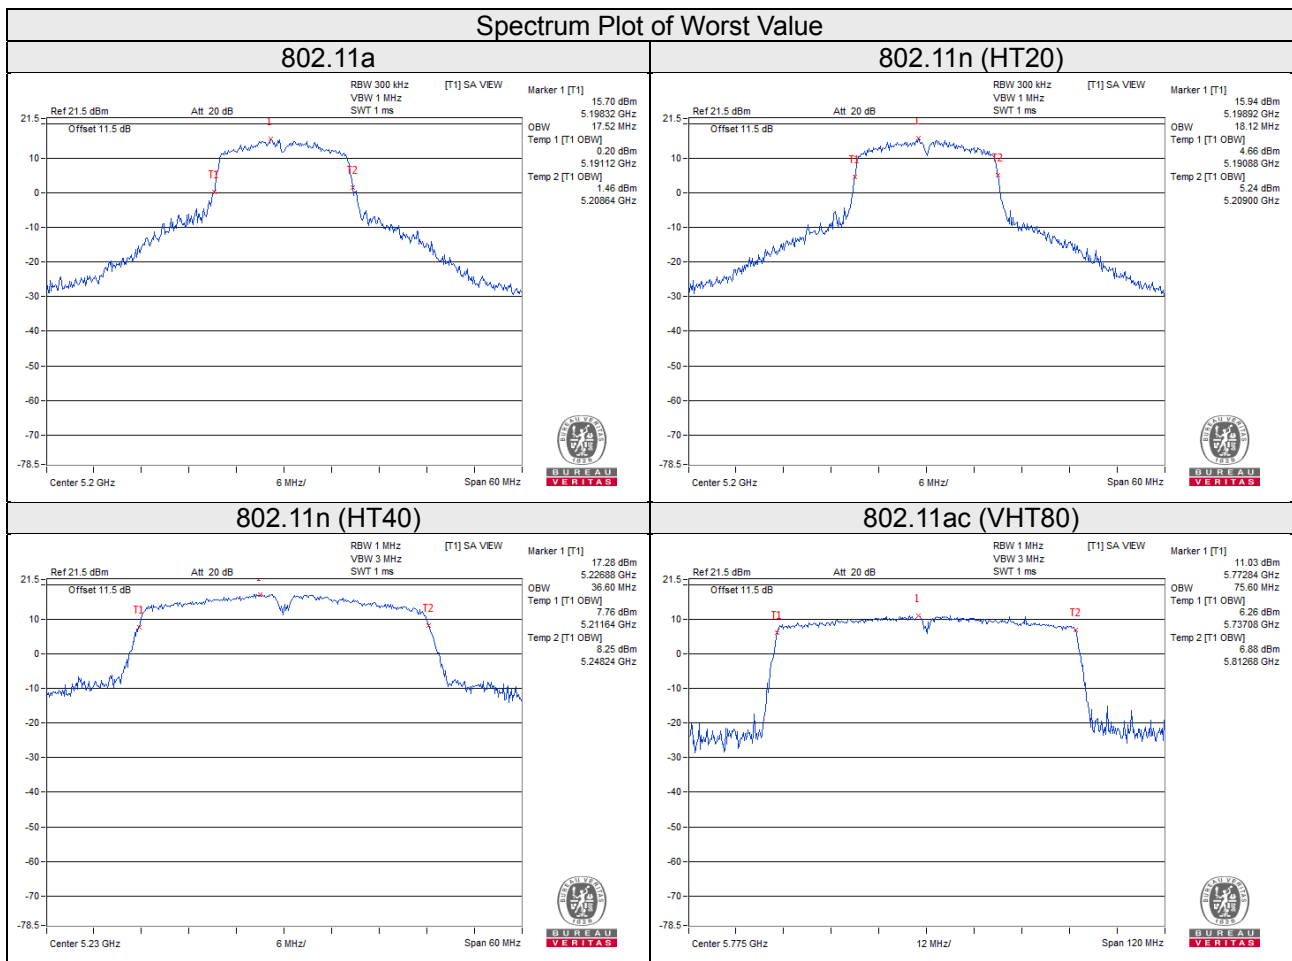


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	-		11dBm/ MHz
U-NII-2C	-		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-1band:

Duty cycle of test signal is $\geq 98\%$

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

Using method SA-2, Duty cycle $<98\%$

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3 band:

Duty cycle of test signal is $\geq 98\%$

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS.
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz} / 300 \text{ kHz})$.
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value.

Duty cycle $<98\%$

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300\text{kHz})$
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-1 Band

802.11a

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	8.07	8.49	0.25	11.55	15.15	Pass
40	5200	11.85	11.76	0.25	15.07	15.15	Pass
48	5240	11.46	11.81	0.25	14.90	15.15	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1:**
Directional gain = $4.84\text{dBi} + 10\log(2) = 7.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (7.85 - 6) = 15.15\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	7.14	7.61	0.40	10.79	15.15	Pass
40	5200	11.69	11.70	0.40	15.11	15.15	Pass
48	5240	11.71	11.75	0.40	15.14	15.15	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1:**
Directional gain = $4.84\text{dBi} + 10\log(2) = 7.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (7.85 - 6) = 15.15\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
38	5190	3.10	3.29	0.63	6.84	15.15	Pass
46	5230	7.47	7.62	0.63	11.19	15.15	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1:**
Directional gain = $4.84\text{dBi} + 10\log(2) = 7.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (7.85 - 6) = 15.15\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-0.88	-0.81	0.22	2.39	15.15	Pass

Note:


- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- For U-NII-1:**
Directional gain = $4.84\text{dBi} + 10\log(2) = 7.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (7.85 - 6) = 15.15\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a / Chain 0 / Ch 40

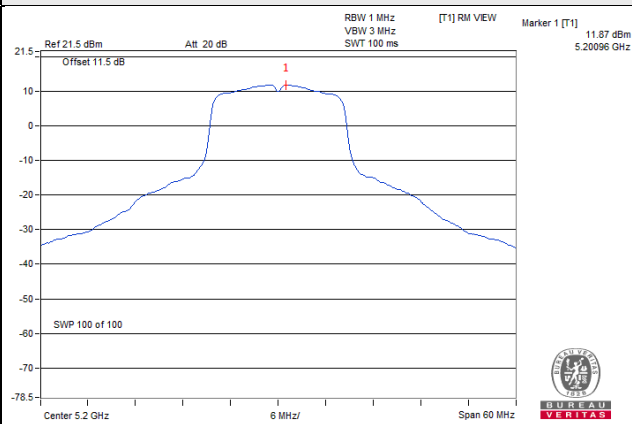


802.11n (HT20) / Chain 1 / Ch 48

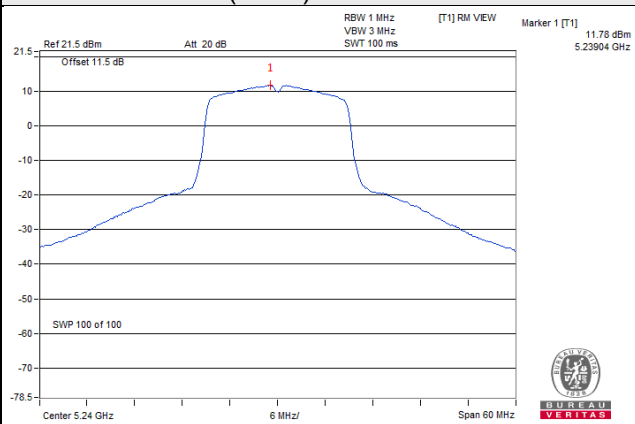

802.11n (HT40) / Chain 1 / Ch 46

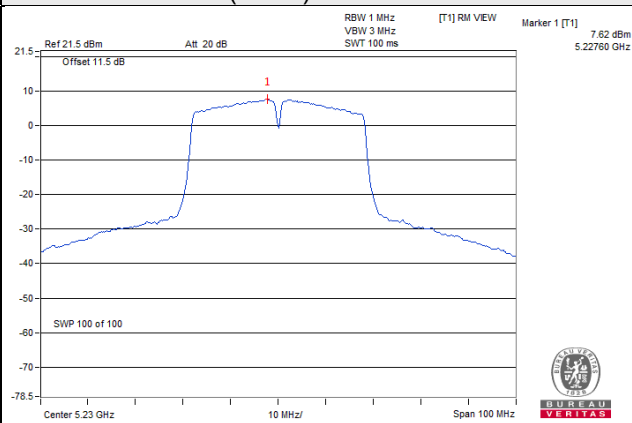

802.11ac (VHT80) / Chain 1 / Ch 42

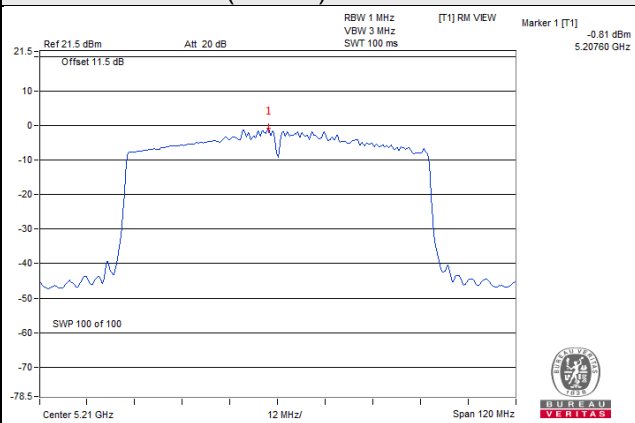

For U-NII-3 band:
 802.11a

TX chain	Channel	Freq. (MHz)	PSD		10 log (N=4) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	149	5745	1.99	4.21	6.02	10.23	24.29	Pass
	157	5785	2.98	5.20	6.02	11.22	24.29	Pass
	165	5825	1.73	3.95	6.02	9.97	24.29	Pass
1	149	5745	2.60	4.82	6.02	10.84	24.29	Pass
	157	5785	2.91	5.13	6.02	11.15	24.29	Pass
	165	5825	1.57	3.79	6.02	9.81	24.29	Pass
2	149	5745	2.13	4.35	6.02	10.37	24.29	Pass
	157	5785	2.57	4.79	6.02	10.81	24.29	Pass
	165	5825	2.14	4.36	6.02	10.38	24.29	Pass
3	149	5745	2.80	5.02	6.02	11.04	24.29	Pass
	157	5785	2.84	5.06	6.02	11.08	24.29	Pass
	165	5825	1.25	3.47	6.02	9.49	24.29	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. For U-NII-3: Directional gain = $5.69\text{dBi} + 10\log(4) = 11.71\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (11.71 - 6) = 24.29\text{dBm}$.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD		10 log (N=4) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	149	5745	1.37	3.59	6.02	9.61	24.29	Pass
	157	5785	1.94	4.16	6.02	10.18	24.29	Pass
	165	5825	0.40	2.62	6.02	8.64	24.29	Pass
1	149	5745	2.13	4.35	6.02	10.37	24.29	Pass
	157	5785	2.72	4.94	6.02	10.96	24.29	Pass
	165	5825	1.33	3.55	6.02	9.57	24.29	Pass
2	149	5745	1.84	4.06	6.02	10.08	24.29	Pass
	157	5785	2.52	4.74	6.02	10.76	24.29	Pass
	165	5825	1.59	3.81	6.02	9.83	24.29	Pass
3	149	5745	1.77	3.99	6.02	10.01	24.29	Pass
	157	5785	2.64	4.86	6.02	10.88	24.29	Pass
	165	5825	0.97	3.19	6.02	9.21	24.29	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- For U-NII-3:** Directional gain = 5.69dBi + 10log (4) = 11.71dBi > 6dBi, so the power density limit shall be reduced to 30-(11.71-6) = 24.29dBm.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD		10 log (N=4) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	151	5755	-1.90	0.32	6.02	6.34	24.29	Pass
	159	5795	-2.13	0.09	6.02	6.11	24.29	Pass
1	151	5755	-1.54	0.68	6.02	6.70	24.29	Pass
	159	5795	-1.97	0.25	6.02	6.27	24.29	Pass
2	151	5755	-1.93	0.29	6.02	6.31	24.29	Pass
	159	5795	-2.32	-0.10	6.02	5.92	24.29	Pass
3	151	5755	-2.22	0.00	6.02	6.02	24.29	Pass
	159	5795	-2.58	-0.36	6.02	5.66	24.29	Pass

Note:


- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- For U-NII-3:** Directional gain = 5.69dBi + 10log (4) = 11.71dBi > 6dBi, so the power density limit shall be reduced to 30-(11.71-6) = 24.29dBm.

802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD		10 log (N=4) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	155	5775	-7.34	-5.12	6.02	0.90	24.29	Pass
1	155	5775	-7.27	-5.05	6.02	0.97	24.29	Pass
2	155	5775	-7.24	-5.02	6.02	1.00	24.29	Pass
3	155	5775	-7.71	-5.49	6.02	0.53	24.29	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- For U-NII-3:** Directional gain = 5.69dBi + 10log (4) = 11.71dBi > 6dBi, so the power density limit shall be reduced to 30-(11.71-6) = 24.29dBm.

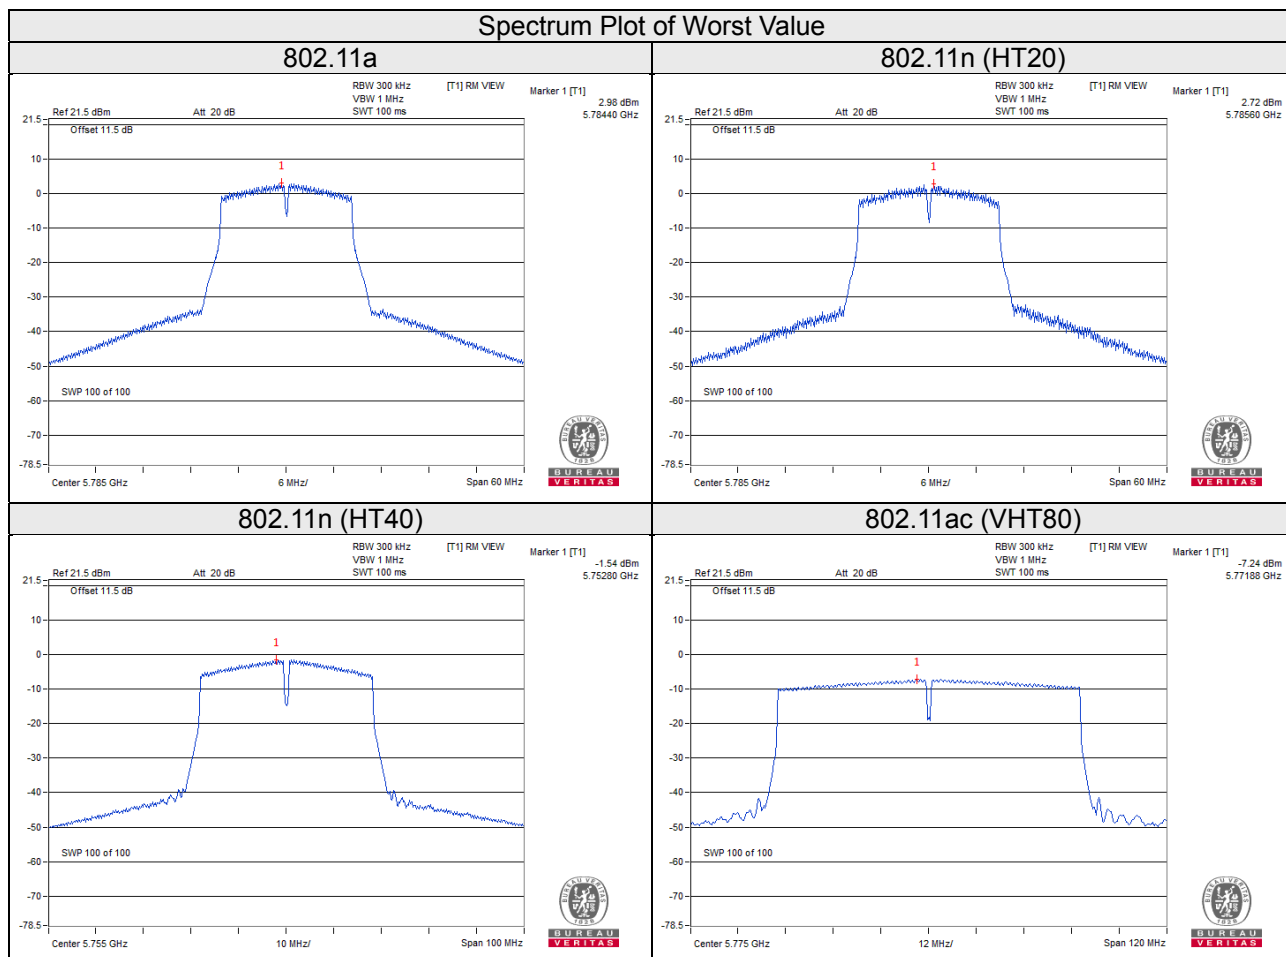


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

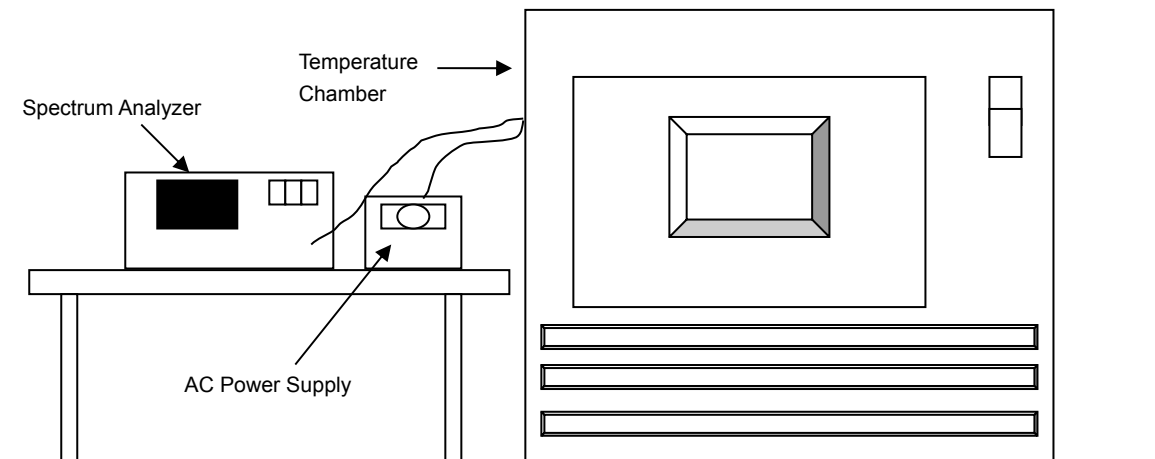

4.6.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100980	Apr. 17, 2018	Apr. 16, 2019
Temperature & Humidity chamber TERCHY	MHU-225AU	920842	Jun. 01, 2018	May 31, 2019
Digital Multimeter Fluke	87-III	70360742	Jun. 29, 2018	Jun. 28, 2019
AC Power Supply Extech	CFW-105	E000603	NA	NA
True RMS Clamp Meter / Fluke	325	31130711WS	May 22, 2018	May 21, 2019

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
40	120	5180.0155	PASS	5180.0139	PASS	5180.0115	PASS	5180.0131	PASS
30	120	5180.0152	PASS	5180.0161	PASS	5180.0188	PASS	5180.0148	PASS
20	120	5179.9817	PASS	5179.9858	PASS	5179.9839	PASS	5179.9849	PASS
10	120	5179.9813	PASS	5179.9825	PASS	5179.9852	PASS	5179.9815	PASS
0	120	5179.9937	PASS	5179.9892	PASS	5179.9931	PASS	5179.9929	PASS


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
20	138	5179.9811	PASS	5179.983	PASS	5179.9851	PASS	5179.9812	PASS
	120	5179.9813	PASS	5179.9825	PASS	5179.9852	PASS	5179.9815	PASS
	102	5179.9813	PASS	5179.9821	PASS	5179.9848	PASS	5179.9808	PASS

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

Measurement Procedure REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	16.40	16.39	16.41	16.37	0.5	Pass
157	5785	16.42	16.40	16.41	16.41	0.5	Pass
165	5825	16.41	16.40	16.40	16.42	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	15.20	17.62	17.64	17.64	0.5	Pass
157	5785	16.16	16.61	17.67	17.65	0.5	Pass
165	5825	15.21	17.64	17.65	17.65	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	36.42	36.43	36.44	36.44	0.5	Pass
159	5795	36.43	36.44	36.45	36.41	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	76.57	76.61	76.69	76.63	0.5	Pass

Spectrum Plot of Worst Value


802.11a

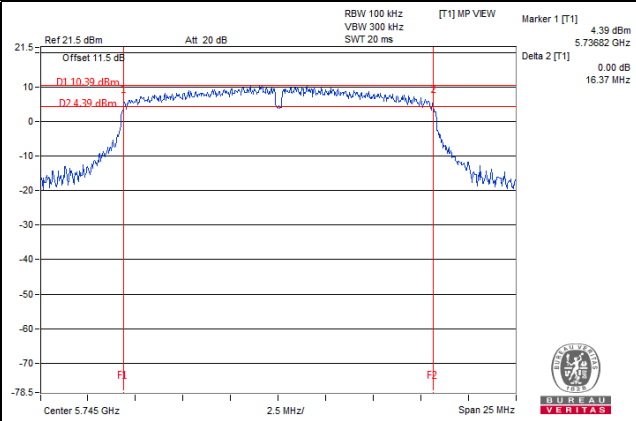


802.11n (HT20)

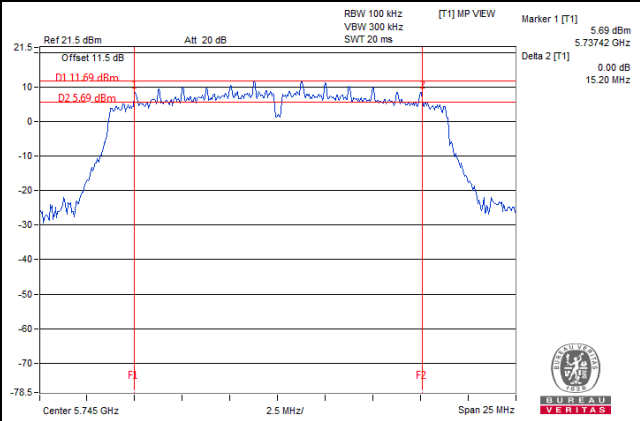

802.11n (HT40)

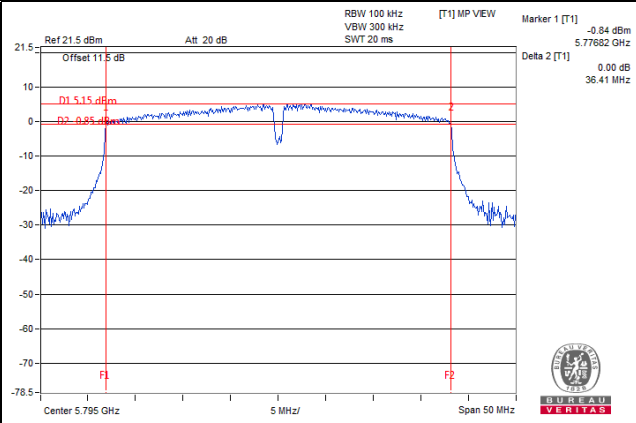

802.11ac (VHT80)

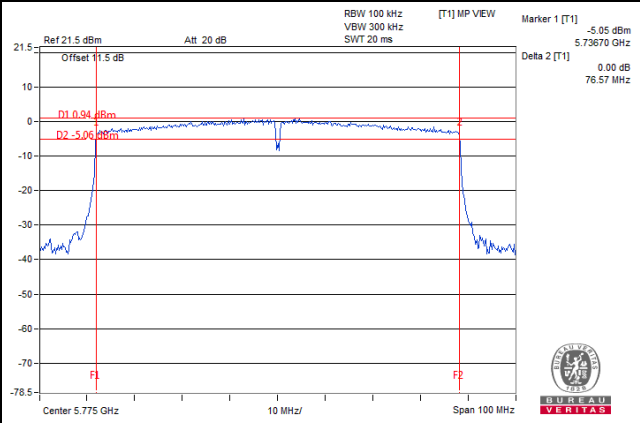


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)



802.11a

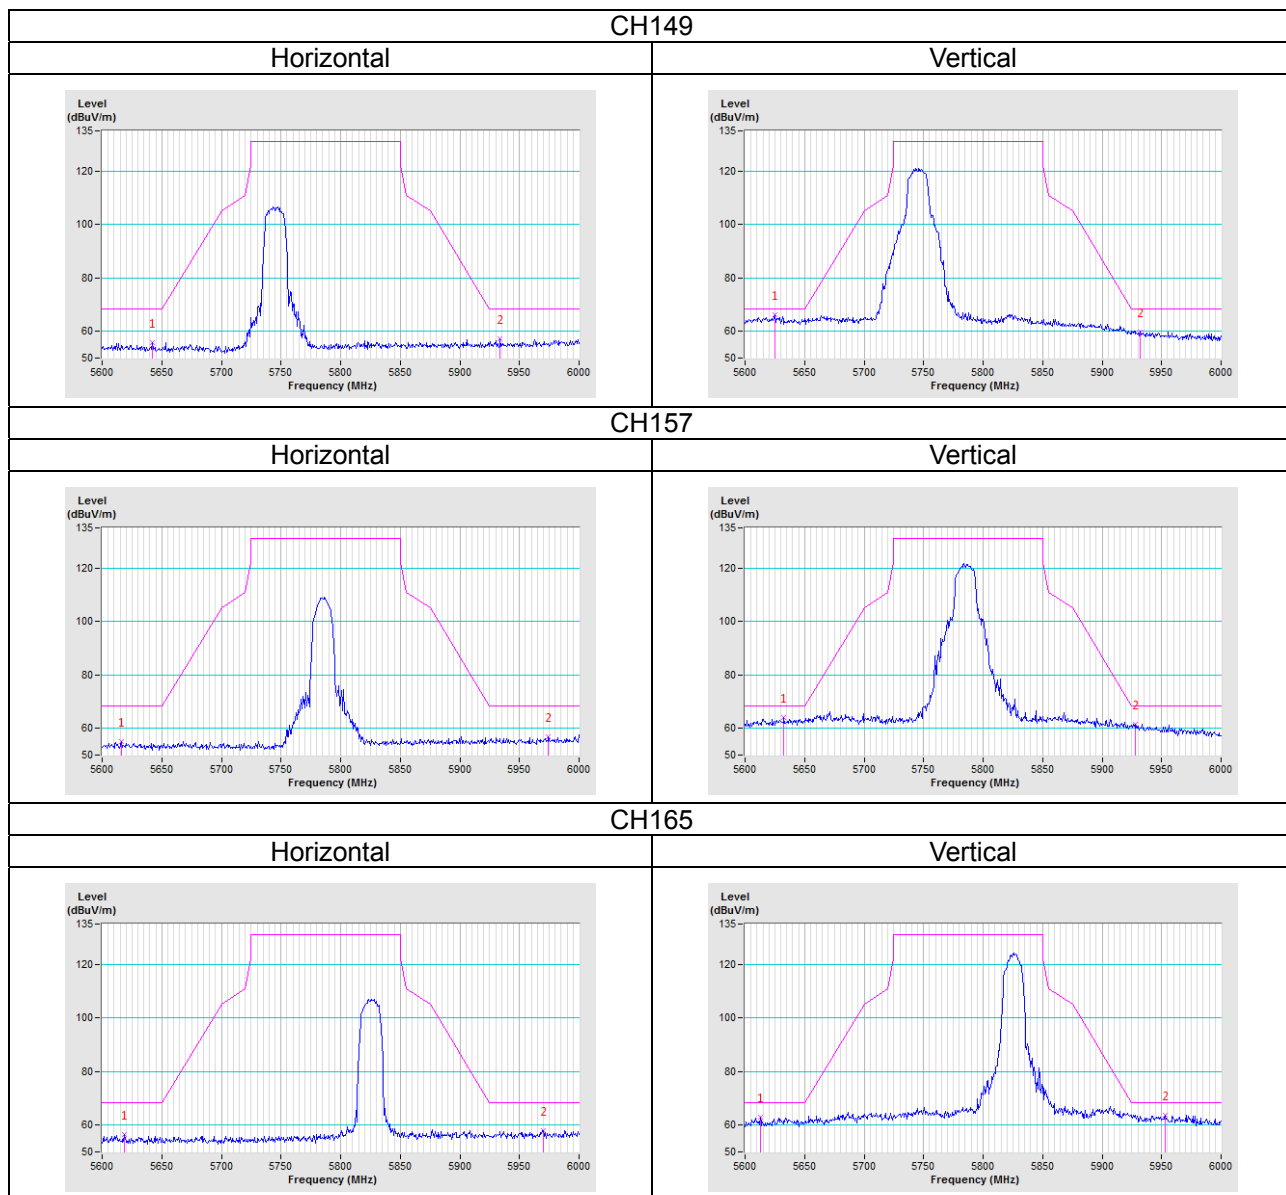


802.11n (HT20)

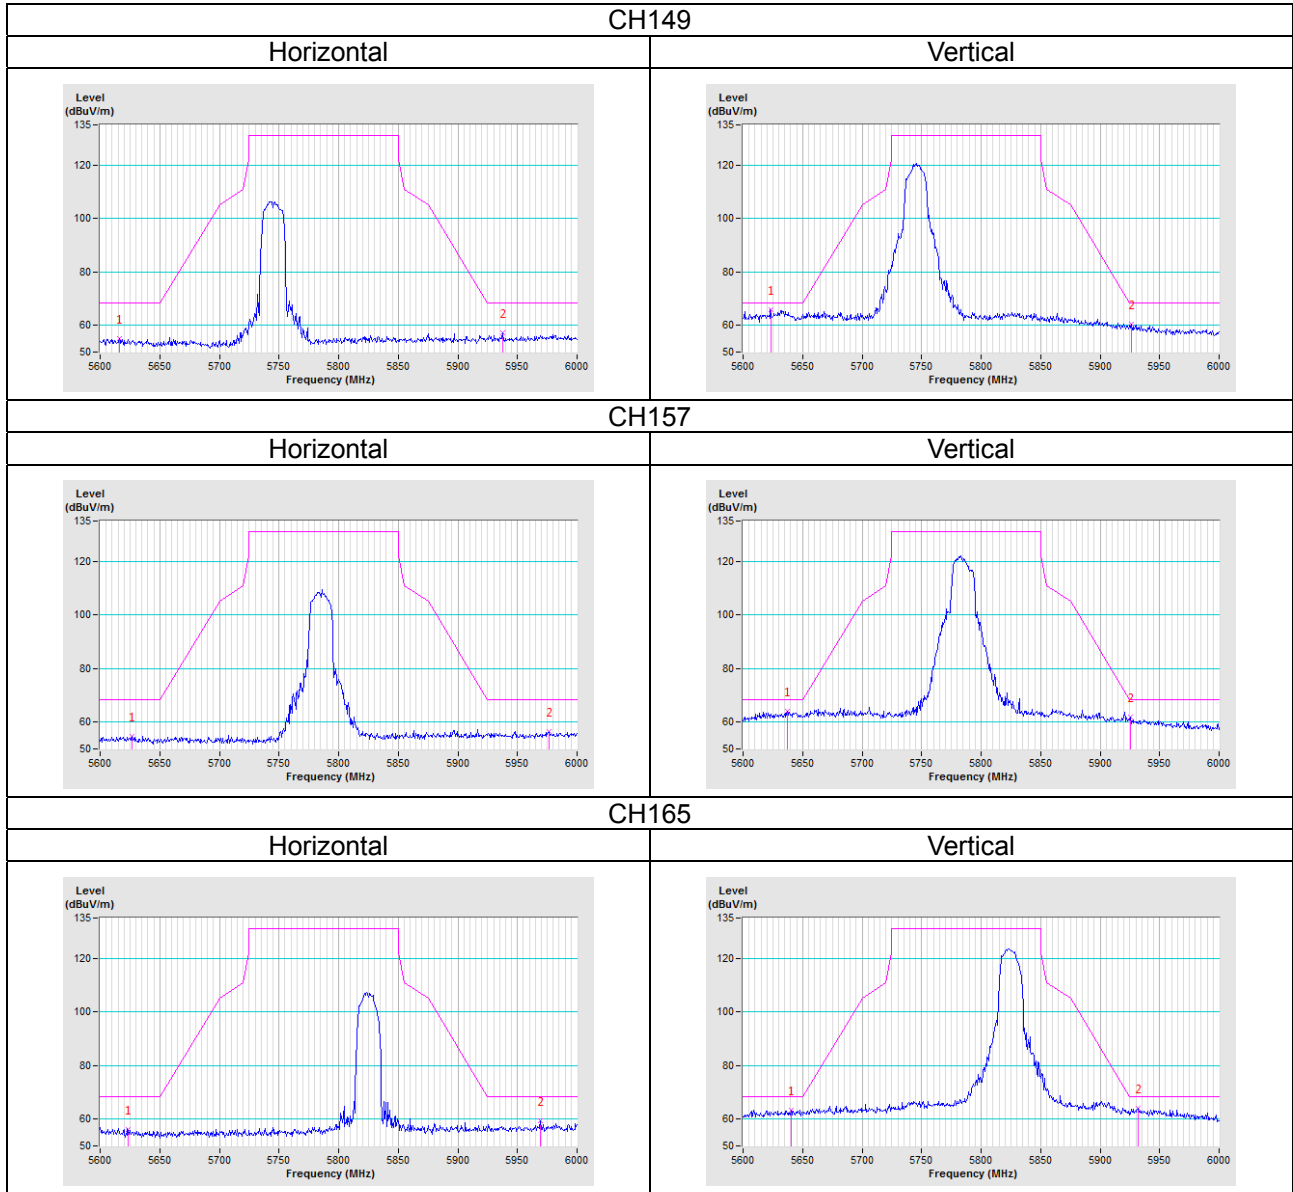

802.11n (HT40)

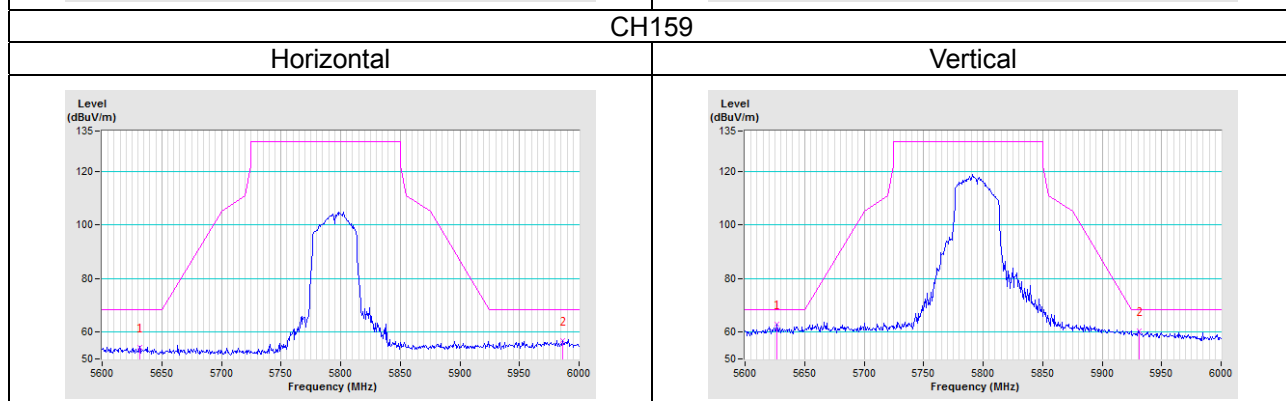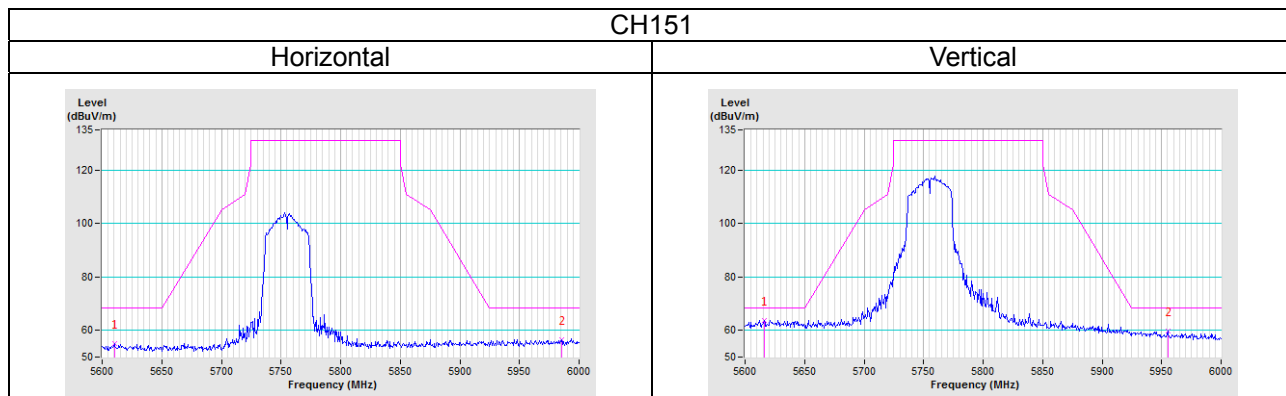

802.11ac (VHT80)

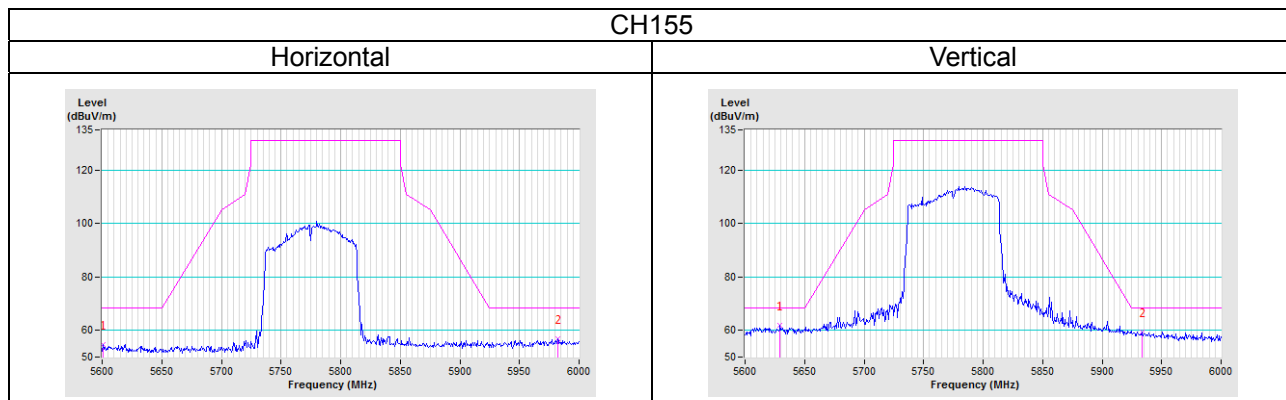

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---