



A D T

FCC TEST REPORT (PART 22)

REPORT NO.: RF990108H03A-1

MODEL NO.: DIR-456U

RECEIVED: Aug. 16, 2010

TESTED: Sep. 13 to 21, 2010

ISSUED: Nov. 12, 2010

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei City
114, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 89 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	10
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4	DESCRIPTION OF SUPPORT UNITS.....	16
3.5	CONFIGURATION OF SYSTEM UNDER TEST.....	17
4	TEST TYPES AND RESULTS	18
4.1	OUTPUT POWER MEASUREMENT	18
4.1.1	LIMITS OF OUTPUT POWER MEASUREMENT.....	18
4.1.2	TEST INSTRUMENTS.....	19
4.1.3	TEST PROCEDURES.....	20
4.1.4	TEST SETUP	21
4.1.5	EUT OPERATING CONDITIONS	22
4.1.6	TEST RESULTS	23
4.2	FREQUENCY STABILITY MEASUREMENT.....	31
4.2.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	31
4.2.2	TEST INSTRUMENTS.....	31
4.2.3	TEST PROCEDURE.....	32
4.2.4	TEST SETUP	32
4.2.5	TEST RESULTS	33
4.3	OCCUPIED BANDWIDTH MEASUREMENT	35
4.3.1	LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT.....	35
4.3.2	TEST INSTRUMENTS.....	35
4.3.3	TEST SETUP	35
4.3.4	TEST PROCEDURES.....	36
4.3.5	EUT OPERATING CONDITION.....	36
4.3.6	TEST RESULTS	37
4.4	BAND EDGE MEASUREMENT.....	49
4.4.1	LIMITS OF BAND EDGE MEASUREMENT	49
4.4.2	TEST INSTRUMENTS.....	49
4.4.3	TEST SETUP	49
4.4.4	TEST PROCEDURES.....	50
4.4.5	EUT OPERATING CONDITION.....	50
4.4.6	TEST RESULTS	51
4.5	CONDUCTED SPURIOUS EMISSIONS.....	57
4.5.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	57
4.5.2	TEST INSTRUMENTS.....	57
4.5.3	TEST PROCEDURE.....	58



4.5.4	TEST SETUP	58
4.5.5	EUT OPERATING CONDITIONS	58
4.5.6	TEST RESULTS	59
4.6	RADIATED EMISSION MEASUREMENT (BELOW 1GHZ)	71
4.6.1	LIMITS OF RADIATED EMISSION MEASUREMENT	71
4.6.2	TEST INSTRUMENTS	72
4.6.3	TEST PROCEDURES	73
4.6.4	DEVIATION FROM TEST STANDARD	74
4.6.5	TEST SETUP	74
4.6.6	EUT OPERATING CONDITIONS	74
4.6.7	TEST RESULTS	75
4.7	RADIATED EMISSION MEASUREMENT (ABOVE 1GHZ)	77
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	77
4.7.2	TEST INSTRUMENTS	78
4.7.3	TEST PROCEDURES	79
4.7.4	DEVIATION FROM TEST STANDARD	79
4.7.5	TEST SETUP	80
4.7.6	EUT OPERATING CONDITIONS	80
4.7.7	TEST RESULTS	81
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	87
6	INFORMATION ON THE TESTING LABORATORIES	88
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	89



A D T

1 CERTIFICATION

PRODUCT : Residential USIM Embedded HSUPA 3G Router
BRAND : D-Link
MODEL NO.: DIR-456U
APPLICANT : D-Link Corporation
TESTED : Sep. 13 to 21, 2010
TEST SAMPLE : MASS-PRODUCTION
STANDARDS : **FCC Part 22, Subpart H**
ANSI C63.4-2003

The above equipment (model: DIR-456U) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Nov. 12, 2010
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Nov. 12, 2010
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Nov. 12, 2010
(May Chen, Deputy Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1047 (d)	Modulation Characteristics	PASS	Meet the requirement of limit.
2.1046 22.913 (a)	Maximum Peak Output Power Limit: max. 7 watts e.r.p peak power	PASS	Meet the requirement of limit.
2.1055	Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 2.5 ppm	PASS	Meet the requirement of limit.
2.1049 (h)	Occupied Bandwidth	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -26.38dB at 1673.2MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB



A D T

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Residential USIM Embedded HSUPA 3G Router
MODEL NO.	DIR-456U
FCC ID	KA2IR456UA1
POWER SUPPLY	12V from power adapter
MODULATION TYPE	GMSK / 8PSK / BPSK
OPERATING FREQUENCY	824MHz ~ 849MHz
NUMBER OF CHANNEL	124 (GSM band) / 102 (WCDMA band)
MAX. ERP POWER	GSM Mode: 30.8dBm (1.2147Watts) GPRS Mode: 30.6dBm (1.1601Watts) E-GPRS Mode: 30.4dBm (1.1078Watts) WCDMA Mode: 24.5dBm (0.2817Watts) HSUPA Mode: 23.8dBm (0.2387Watts) HSDPA Mode: 24.3dBm (0.2719Watts)
ANTENNA TYPE	Please see note 1
MAX. ANTENNA GAIN	Please see note 1
DATA CABLE	RJ-11 Cable (Unshielded, 1.8m) Ethernet cable (Unshielded, 1.5m)
I/O PORTS	WAN Port x1 (Ethernet (10,100Mbps)) LAN Port x2 (Ethernet (10,100Mbps)) PHONE Port x1 3G SIM Port x1
ACCESSORY DEVICES	Adapter x1



A D T

NOTE:

1. There are two sets of antennas provided to this EUT, please refer to the following table:

Set	Ant.	Manufacturer	ANT Type	ANT Model	Connector
Set 1	Main	Auden Techno Corp.	PCB Antenna	H-0124-1	I-PEX
	Aux	Auden Techno Corp.	PCB Antenna	H-0124-2	I-PEX
Set 2	Main	WHA YU INDUSTRIAL CO., LTD.	PCB Antenna	C037-511090-A	I-PEX
	Aux	WHA YU INDUSTRIAL CO., LTD.	PCB Antenna	C037-511091-A	I-PEX

Antenna Gain (Peak Gain)

Set	CELL850 (dBi)	EGSM900 (dBi)	DCS1800 (dBi)	DCS1900 (dBi)	WCDMA2100 (dBi)
Set 1	CELL850 (dBi)	EGSM900 (dBi)	DCS1800 (dBi)	DCS1900 (dBi)	WCDMA2100 (dBi)
Main	0	0.3	1.9	3.0	3.2
Set 1	CELL850 (dBi)	EGSM900 (dBi)	DCS1800 (dBi)	DCS1900 (dBi)	WCDMA2100 (dBi)
Aux (RX only)	0.6	-1.5	0.3	0.1	-1.4
Set 2	CELL850 (dBi)	EGSM900 (dBi)	DCS1800 (dBi)	DCS1900 (dBi)	WCDMA2100 (dBi)
Main	-1	-0.2	1.4	0.8	0.8
Set 2	CELL850 (dBi)	EGSM900 (dBi)	DCS1800 (dBi)	DCS1900 (dBi)	WCDMA2100 (dBi)
Aux (RX only)	-1.3	-1.6	0.1	-0.3	-0.3

From the above antennas, antenna **set 1** was selected as representative antenna for the test and its data was recorded in this report.

2. The EUT's appearance has two different colors (black and white).
3. The EUT must be supplied with a power adapter and following two different models could be chosen:

Adapter 1	
Brand:	D-Link
Model No.:	AMS4-1202000SU
Input power :	100-120V, 0.8A, 60Hz
Output power :	+12V, 2.0A DC Power cord: 1.5m/ Without core/ Non shielded
Adapter 2	
Brand:	D-Link
Model No.:	CG2412-B
Input power :	100-240V, 0.5A, 50/60Hz
Output power :	+12V, 2.0A DC Power cord: 1.5m/ Without core/ Non shielded

The EUT was pre-tested in chamber with above adapters, the radiated emission worst case was found in model: **AMS4-1202000SU**. Therefore only the test data of the mode was recorded in this report.



A D T

4. The EUT is a Residential USIM Embedded HSUPA 3G Router. The functions of EUT listed as below table:

FUNCTIONS	TEST STANDARD	REFERENCE REPORT
WLAN 802.11b/g	FCC Part 15	RF990108H03A
GSM 850 / WCDMA 850	FCC Part 22	RF990108H03A-1
PCS 1900 / WCDMA 1900	FCC Part 24	RF990108H03A-2

5. The communicated functions of EUT listed as below:

		GSM850MHz	PCS1900MHz	WCDMA850MHz	WCDMA1900MHz
2G	GSM	√	√		
	GPRS	√	√		
	E-GPRS	√	√		
3G	WCDMA			√	√
	HSDPA			√	√
	Release 6 HSUPA			√	√

6. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Level-set
Mode B	Tower-set

From the above modes, the radiated emission worst case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR GSM BAND:

124 channels are provided to this EUT in the GSM850 band. Therefore, the low, middle and high channels are chosen for testing.

	CHANNEL	FREQUENCY	TX MODE
LOW	128	824.2 MHz	GSM, GPRS, E-GPRS
MIDDLE	190	836.6 MHz	GSM, GPRS, E-GPRS
HIGH	251	848.8 MHz	GSM, GPRS, E-GPRS

NOTE:

1. Below 1 GHz, the channel 128, 190, and 251 were pre-tested in chamber. The channel 251 was chosen for final test.
2. Above 1 GHz, the channel 128, 190, and 251 were tested individually.
3. The worst case for final test is chosen when the power control level set 5.
4. The channel space is 0.2MHz.
5. The EUT is a GPRS class 12 device, which provide 4 up-link. After pre-tested both functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
6. The EUT is an E-GPRS class 12 device, which provide 4 up-link. After pre-tested both functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
7. The EUT has GSM, GPRS, E-GPRS functions. After pre-testing, GSM function is the worst case for all the emission tests.

FOR WCDMA BAND:

102 channels are provided to this EUT in the WCDMA850 band. Therefore, the low, middle and high channels are chosen for testing.

	CHANNEL	FREQUENCY	TX MODE
LOW	4132	826.4 MHz	WCDMA,HSDPA,HSUPA
MIDDLE	4182	836.4 MHz	WCDMA,HSDPA,HSUPA
HIGH	4233	846.6 MHz	WCDMA,HSDPA,HSUPA

NOTE:

1. Below 1 GHz, the channel 4132, 4182 and 4233 were pre-tested in chamber. The channel 4233 was chosen for final test.
2. Above 1 GHz, the channel 4132, 4182 and 4233 were tested individually.
3. The channel space is 0.2MHz.
4. (RMC, WCDMA Inactive) mode has been chosen for the worst case to do the final test and record.

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	OB	BE	CE	RE<1G	RE [≥] 1G	
A	√	√	√	√	√	√	√	GSM BAND
B	√	√	√	√	√	√	√	WCDMA BAND

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE[≥]1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 190, 251	GSM, GPRS, E-GPRS
4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	190	GSM
4132 to 4233	4182	WCDMA



OCCUPIED BANDWIDTH MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 190, 251	GSM, GPRS, E-GPRS
4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 251	GSM, GPRS, E-GPRS
4132 to 4233	4132, 4233	WCDMA, HSDPA, HSUPA

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 190, 251	GSM
4132 to 4233	4132, 4182, 4233	WCDMA

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	251	GSM
4132 to 4233	4233	WCDMA

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 190, 251	GSM
4132 to 4233	4132, 4182, 4233	WCDMA



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

IC RSS-132

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP18L	6976685584	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP17L	CN-ONF743-48643-7AV-0124	FCC DoC
3	NOTEBOOK COMPUTER	DELL	D531	CN-0XM006-48643-86L-4472	QDS-BRCM1019
4	TELEPHONE	Romeo	TE-812	97280926	NA
5	Universal Radio Communication Tester	R&S	CMU200	101095	NA
6	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (Unshielded, 10m)
2	UTP cable (Unshielded, 10m)
3	NA
4	RJ-11 cable (Unshielded, 10m)
5	NA
6	UTP cable (Unshielded, 10m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

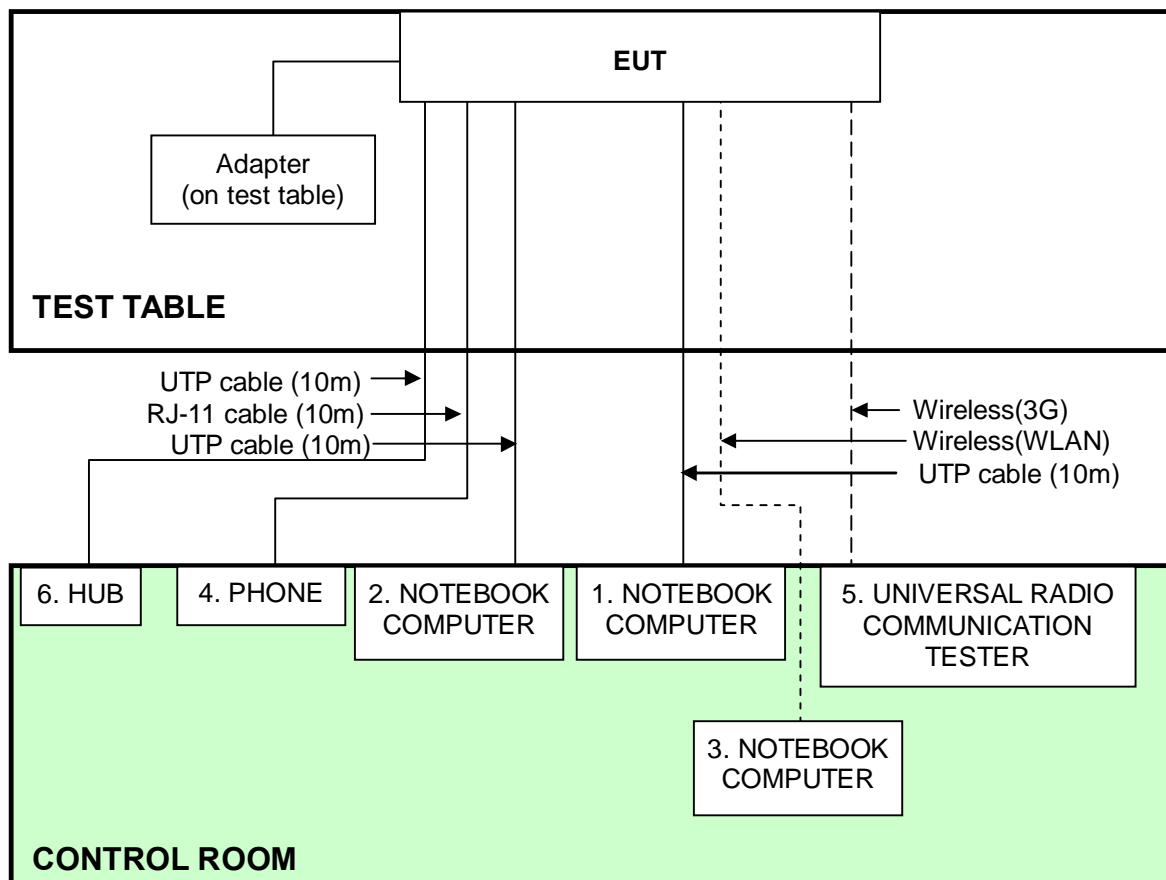



A D T

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 22.913 (a) that “Mobile / Portable station are limited to 7 watts e.r.p”.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	May 12 , 2010	May 11 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M-1GHz	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.


4.1.3 TEST PROCEDURES

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 / 4132, 4182 and 4233 (low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 1MHz (GSM) and 5MHz (WCDMA), then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. E.I.R.P peak power measurement. In the open area test site, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. “Raw” is the spectrum reading value, “SG” is signal generator export power, “TX Gain” is calibration antenna isotropic gain value, “TX cable” is the transmitted cable loss between the calibration antenna and signal generator. The “Factor” means that the transmission path loss is equal to “SG” - “TX cable” + “TX Gain” – “Raw”.
- e. Actually the real E.I.R.P peak power is equal to “Read Value” + “Factor”
- f. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
$$\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection (PK)


4.1.4 TEST SETUP

EIRP POWER MEASUREMENT:

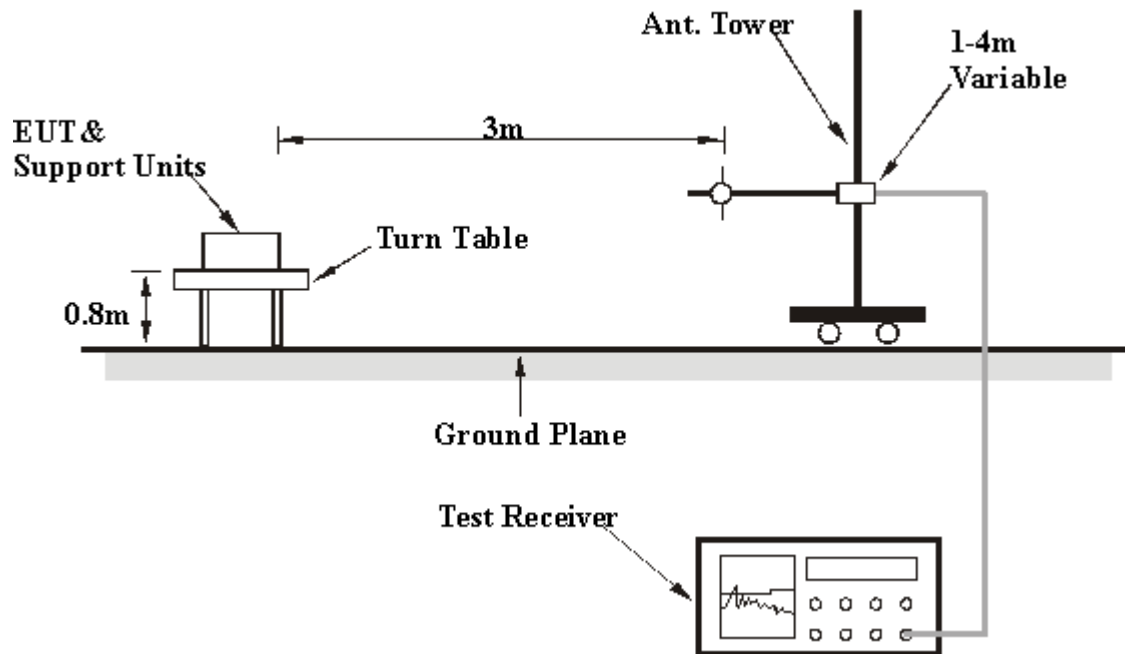

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

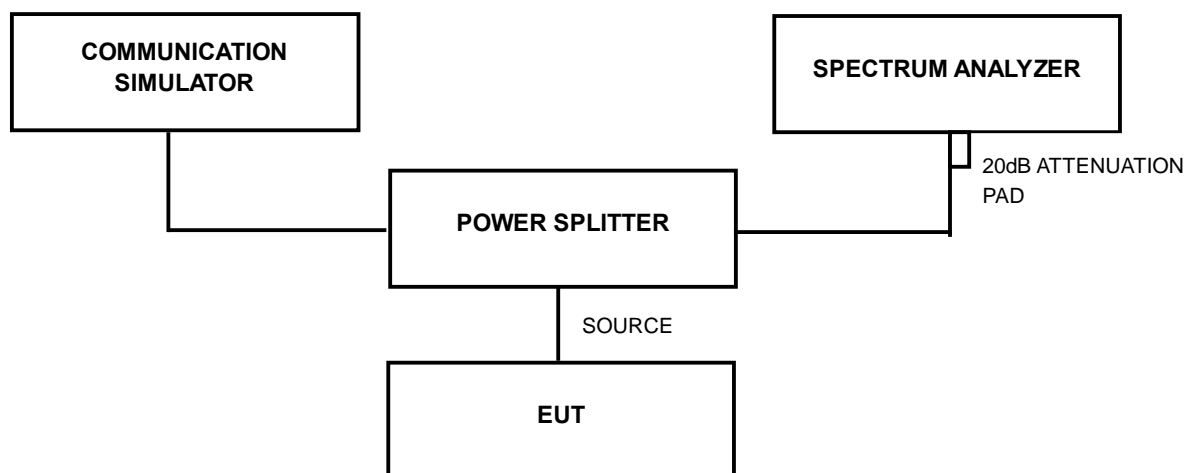

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.1.5 EUT OPERATING CONDITIONS

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.



A D T

4.1.6 TEST RESULTS

FOR GSM BAND:

MODE	TX connected	POWER CONTROL LEVEL	5
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak / RMS
ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa	TESTED BY	Wen Yu

FOR GSM MODE

CONDUCTED PEAK OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
128	824.2	27.5	5.0	32.5	1.7783
190	836.6	27.5	5.0	32.5	1.7783
251	848.8	27.6	5.0	32.6	1.8197

CONDUCTED RMS OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	RMS OUTPUT POWER	
				dBm	Watt
128	824.2	27.2	5.0	32.2	1.6596
190	836.6	27.2	5.0	32.2	1.6596
251	848.8	27.3	5.0	32.3	1.6982

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



A D T

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CONDUCTED PEAK OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
128	824.2	27.4	5.0	32.4	1.7378
190	836.6	27.5	5.0	32.5	1.7783
251	848.8	27.3	5.0	32.3	1.6982

CONDUCTED RMS OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	RMS OUTPUT POWER	
				dBm	Watt
128	824.2	27.1	5.0	32.1	1.6218
190	836.6	27.1	5.0	32.1	1.6218
251	848.8	27.0	5.0	32.0	1.5849

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CONDUCTED PEAK OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
128	824.2	27.3	5.0	32.3	1.6982
190	836.6	27.4	5.0	32.4	1.7378
251	848.8	27.2	5.0	32.2	1.6596

CONDUCTED RMS OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	RMS OUTPUT POWER	
				dBm	Watt
128	824.2	27.1	5.0	32.1	1.6218
190	836.6	27.1	5.0	32.1	1.6218
251	848.8	26.9	5.0	31.9	1.5488

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



A D T

MODE	TX connected	POWER CONTROL LEVEL	5
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa	TESTED BY	Wen Yu

FOR GSM MODE

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
128	824.2	28.8	1.3	30.1	1.0229
190	836.6	29.3	1.2	30.5	1.1165
251	848.8	29.8	1.0	30.8	1.2147

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
128	824.2	28.7	1.3	30.0	0.9996
190	836.6	29.2	1.2	30.4	1.0911
251	848.8	29.6	1.0	30.6	1.1601

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
128	824.2	28.6	1.3	29.9	0.9768
190	836.6	29.1	1.2	30.3	1.0663
251	848.8	29.4	1.0	30.4	1.1078

- REMARKS:**
1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Receiver Antenna Gain (dBi) + Cable Loss (dB) + Free Space Loss (dB).



A D T

FOR WCDMA BAND:

The following procedures were followed according to FCC “SAR Measurement Procedures for 3G Devices”, October, 2007.

Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1”s for WCDMA/HSDPA or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations should be clearly identified.



A D T

MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak / RMS
ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa	TESTED BY	Wen Yu

CONDUCTED PEAK OUTPUT POWER (RMC, WCDMA INACTIVE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
4132	826.4	21.5	5.0	26.5	0.4467
4182	836.4	21.4	5.0	26.4	0.4365
4233	846.6	21.3	5.0	26.3	0.4266

CONDUCTED RMS OUTPUT POWER (RMC, WCDMA INACTIVE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	RMS OUTPUT POWER	
				dBm	Watt
4132	826.4	18.2	5.0	23.2	0.2089
4182	836.4	18.1	5.0	23.1	0.2042
4233	846.6	18.0	5.0	23.0	0.1995

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



A D T

MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak / RMS
ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa	TESTED BY	Wen Yu

CONDUCTED PEAK OUTPUT POWER (HSDPA ACTIVE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
4132	826.4	21.1	5.0	26.1	0.4074
4182	836.4	21.1	5.0	26.1	0.4074
4233	846.6	21.2	5.0	26.2	0.4169

CONDUCTED RMS OUTPUT POWER (HSDPA ACTIVE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	RMS OUTPUT POWER	
				dBm	Watt
4132	826.4	17.8	5.0	22.8	0.1905
4182	836.4	17.8	5.0	22.8	0.1905
4233	846.6	17.9	5.0	22.9	0.1950

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



A D T

MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak / RMS
ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa	TESTED BY	Wen Yu

CONDUCTED PEAK OUTPUT POWER (HSUPA ACTIVE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
4132	826.4	21.0	5.0	26.0	0.3981
4182	836.4	20.7	5.0	25.7	0.3715
4233	846.6	19.2	5.0	24.2	0.2630

CONDUCTED RMS OUTPUT POWER (HSUPA ACTIVE)					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	RMS OUTPUT POWER	
				dBm	Watt
4132	826.4	17.7	5.0	22.7	0.1862
4182	836.4	17.4	5.0	22.4	0.1738
4233	846.6	16.9	5.0	21.9	0.1549

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



A D T

MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa	TESTED BY	Wen Yu

FOR WCDMA MODE

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
4132	826.4	23.2	1.3	24.5	0.2817
4182	836.4	23.1	1.2	24.3	0.2678
4233	846.6	23.4	1.0	24.4	0.2783

FOR HSUPA MODE

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
4132	826.4	21.8	1.3	23.1	0.2046
4182	836.4	22.6	1.2	23.8	0.2387
4233	846.6	22.7	1.0	23.7	0.2369

FOR HSDPA MODE

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	PEAK OUTPUT POWER	
				dBm	Watt
4132	826.4	22.2	1.3	23.5	0.2238
4182	836.4	22.6	1.2	23.8	0.2387
4233	846.6	23.3	1.0	24.3	0.2719

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).

2. Correction Factor (dB) = Receiver Antenna Gain (dBi) + Cable Loss (dB) + Free Space Loss (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that” The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.2.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 02, 2010	Aug. 01, 2011
OVEN	MHU-225AU	911033	Dec. 17, 2009	Dec. 16, 2010
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 14, 2010	Aug. 13, 2011
AC POWER SOURCE	6205	1140503	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- a. Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GSM / WCDMA link mode. This is accomplished with the use of the R&S CMU200 / JRC NJZ-2000 simulator station. The oven room could control the temperatures and humidity. The GSM link channel is the 190 and the WCDMA link channel is the 4182.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 138 Volts to 102 Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

4.2.4 TEST SETUP

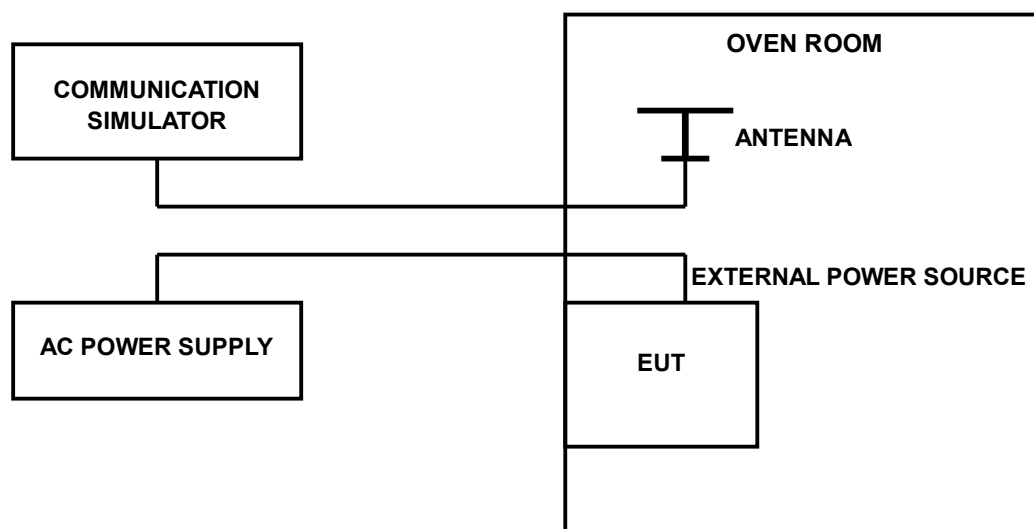



A D T

4.2.5 TEST RESULTS

FOR GSM BAND:

MODE	TX Middle channel	POWER CONTROL LEVEL	5
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Wen Yu		

AFC FREQUENCY ERROR vs. VOLTAGE			
VOLTAGE (Volts)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
138	-88	-0.105	2.5
102	-79	-0.094	2.5

AFC FREQUENCY ERROR vs. TEMP.			
TEMP. (°C)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
50	-85	-0.102	2.5
40	-77	-0.092	2.5
30	-68	-0.081	2.5
20	-59	-0.071	2.5
10	-62	-0.074	2.5
0	-75	-0.090	2.5
-10	-81	-0.097	2.5



A D T

FOR WCDMA BAND:

MODE	TX Middle channel	POWER CONTROL LEVEL	0
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Wen Yu		

AFC FREQUENCY ERROR vs. VOLTAGE			
VOLTAGE (Volts)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
138	-88	-0.105	2.5
102	-68	-0.081	2.5

AFC FREQUENCY ERROR vs. TEMP.			
TEMP. (°C)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
50	-89	-0.106	2.5
40	-74	-0.088	2.5
30	-69	-0.082	2.5
20	-58	-0.069	2.5
10	-62	-0.074	2.5
0	-71	-0.085	2.5
-10	-85	-0.102	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

According to FCC 2.1049 (h) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 02, 2010	Aug. 01, 2011
OVEN	MHU-225AU	911033	Dec. 17, 2009	Dec. 16, 2010
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 14, 2010	Aug. 13, 2011
AC POWER SOURCE	6205	1140503	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)

4.3.4 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with GSM / WCDMA link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 / 4132, 4182 and 4233 (low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 6dB (GSM band) / 6dB (WCDMA band) in the transmitted path track.
- c. FCC 2.1049 (h) required a measurement bandwidth is the fundamental emission below 26dB bandwidth.

4.3.5 EUT OPERATING CONDITION

Same as Item 4.1.5


4.3.6 TEST RESULTS

FOR GSM BAND:

FOR GSM MODE

CHANNEL	MAX. OUTPUT POWER -26 dBc BANDWIDTH (kHz)
LOW	309
MIDDLE	312
HIGH	313


LOW CHANNEL

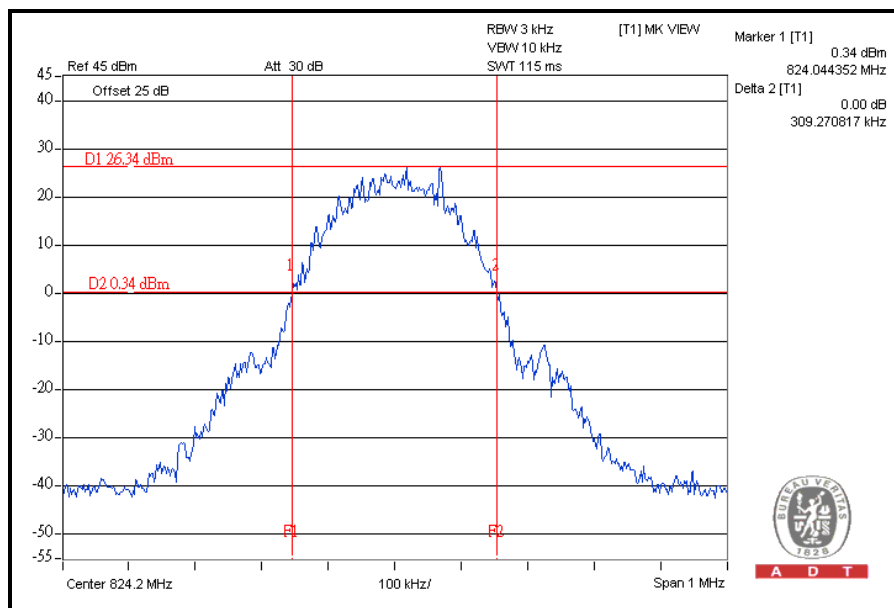




A D T

MIDDLE CHANNEL

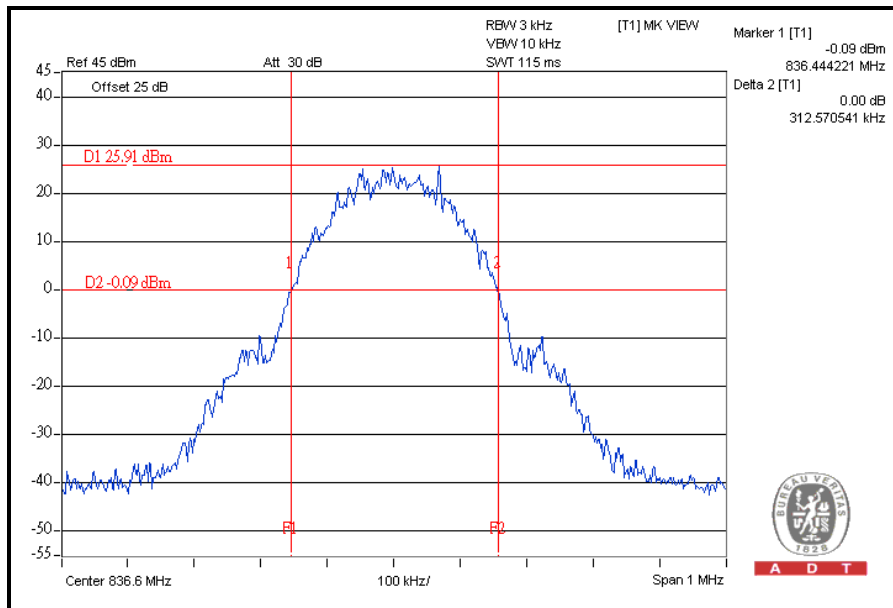


HIGH CHANNEL

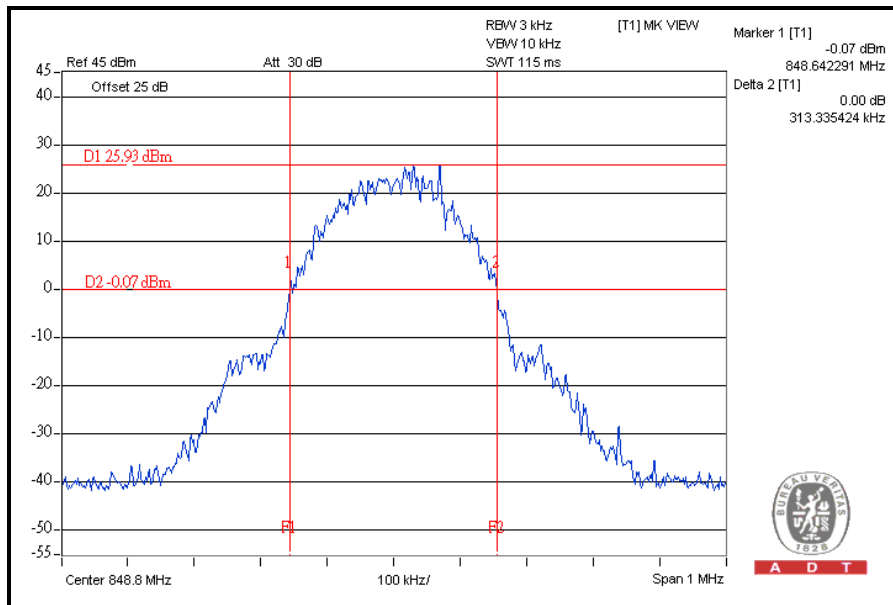

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CHANNEL	MAX. OUTPUT POWER -26 dBc BANDWIDTH (kHz)
LOW	311
MIDDLE	311
HIGH	319


LOW CHANNEL

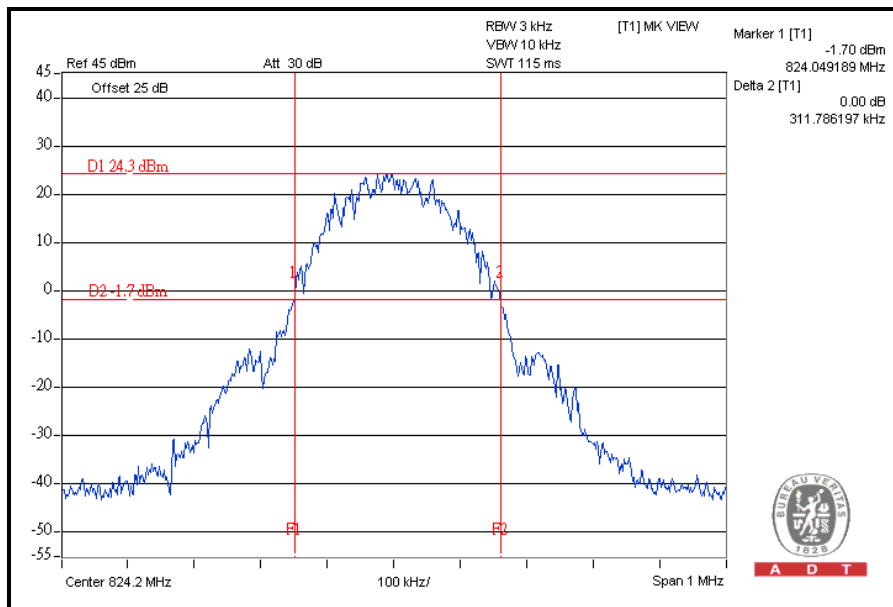




A D T

MIDDLE CHANNEL

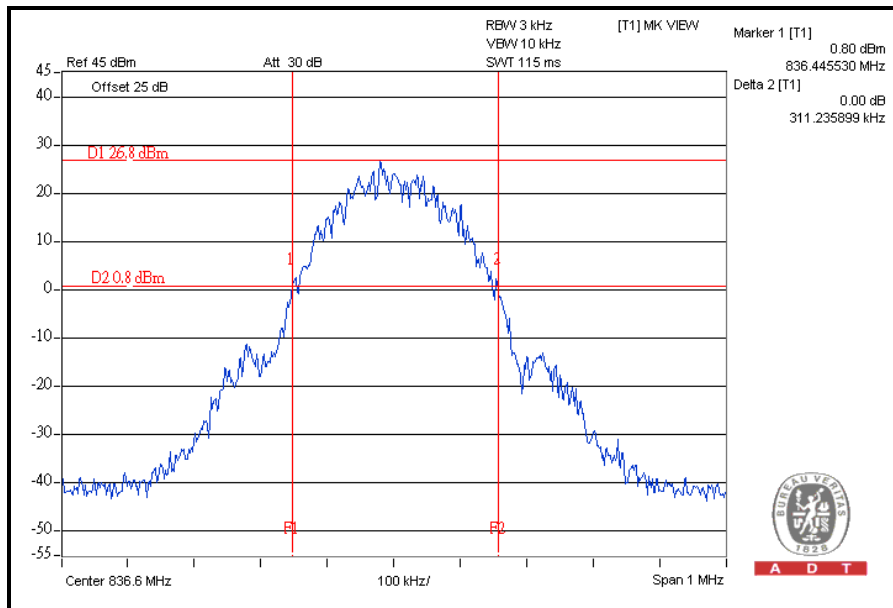

HIGH CHANNEL

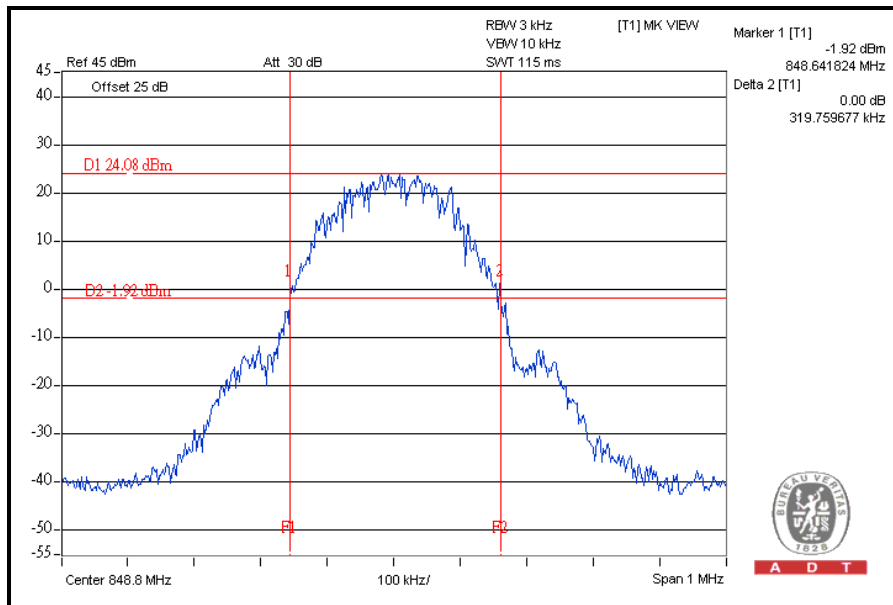




A D T

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CHANNEL	MAX. OUTPUT POWER -26 dBc BANDWIDTH (kHz)
LOW	309
MIDDLE	312
HIGH	311


LOW CHANNEL

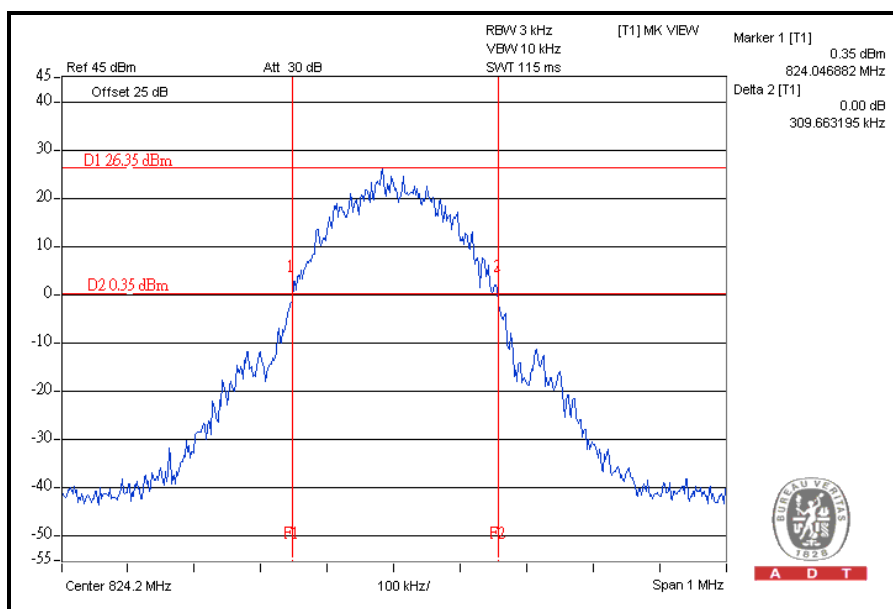




A D T

MIDDLE CHANNEL

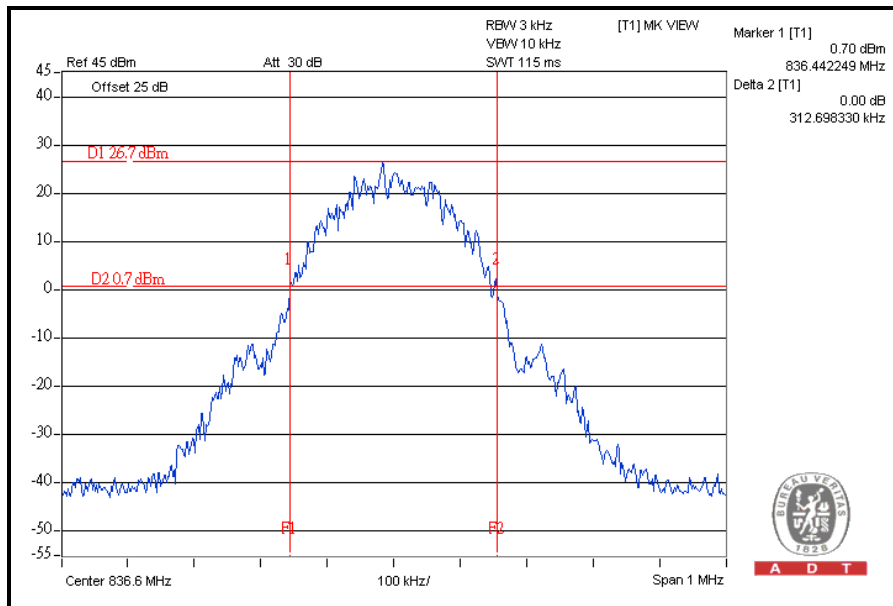


HIGH CHANNEL

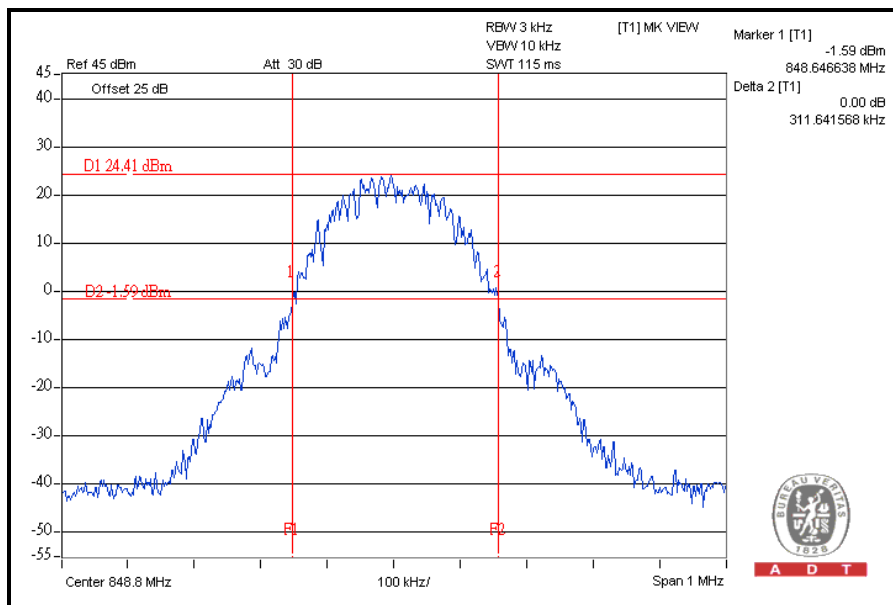

FOR WCDMA BAND:

CHANNEL	MAX. OUTPUT POWER -26 dBc BANDWIDTH (MHz)
LOW	4.687
MIDDLE	4.666
HIGH	4.690


LOW CHANNEL

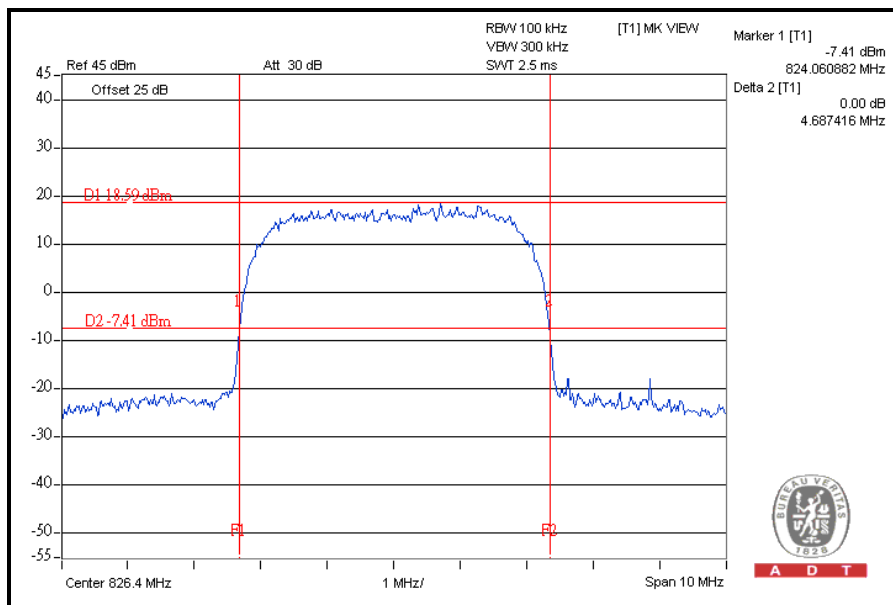




A D T

MIDDLE CHANNEL

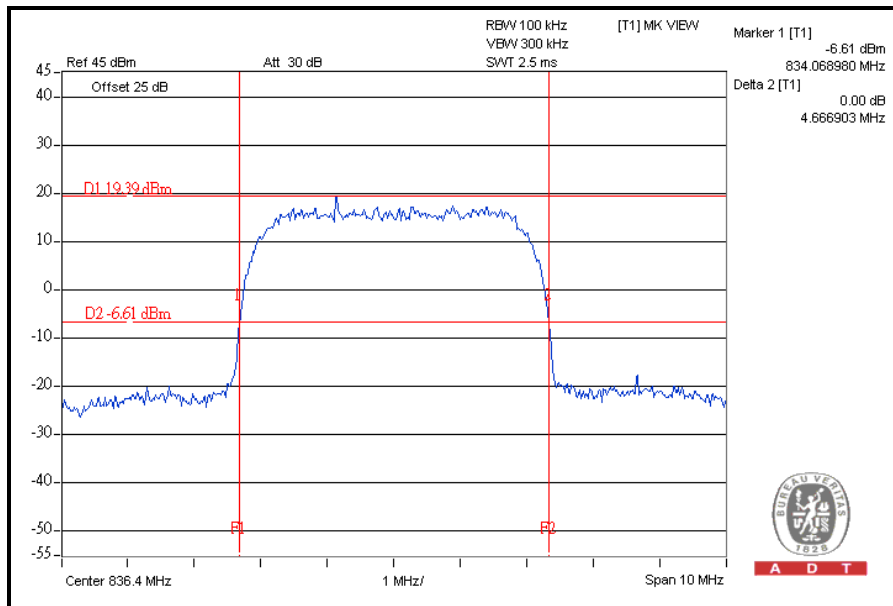


HIGH CHANNEL

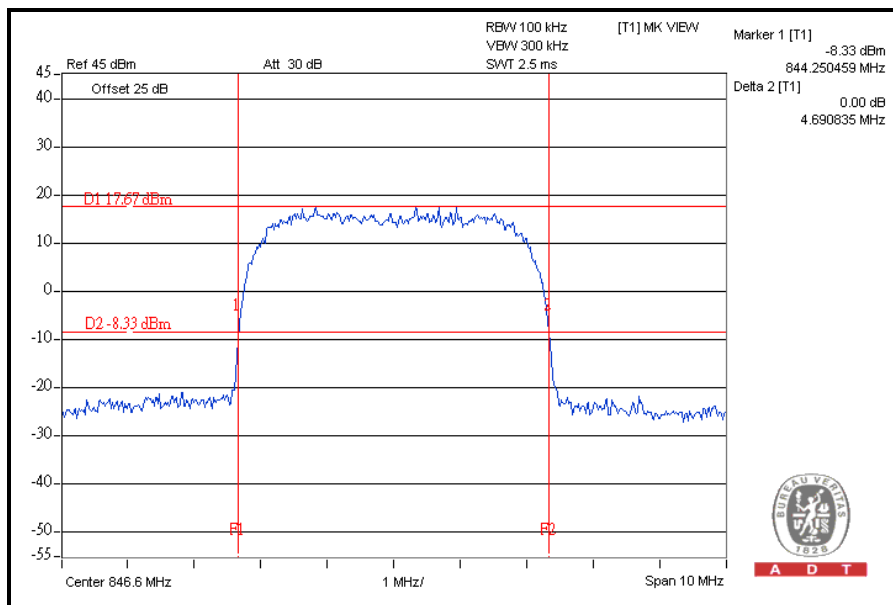

FOR HSUPA BAND:

CHANNEL	MAX. OUTPUT POWER -26 dBc BANDWIDTH (MHz)
LOW	4.688
MIDDLE	4.679
HIGH	4.702


LOW CHANNEL

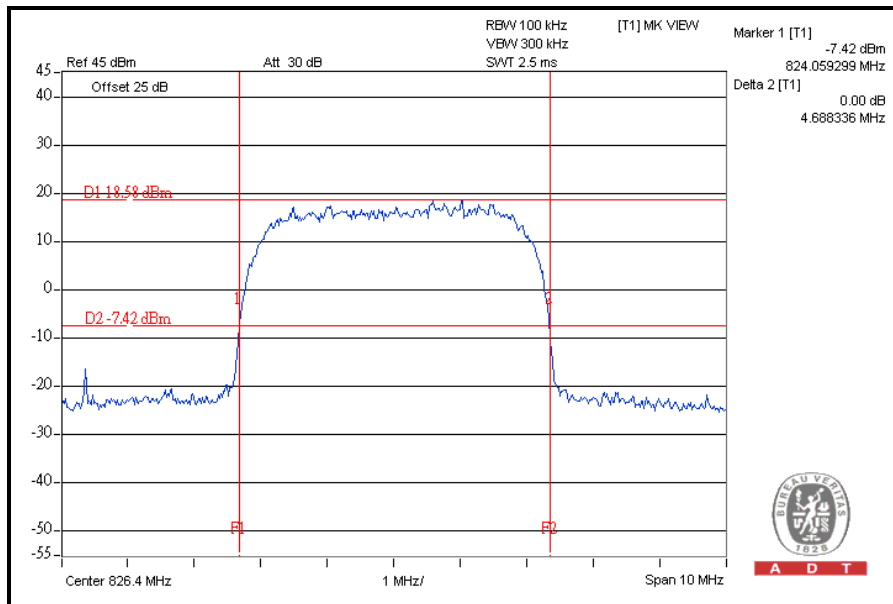




A D T

MIDDLE CHANNEL

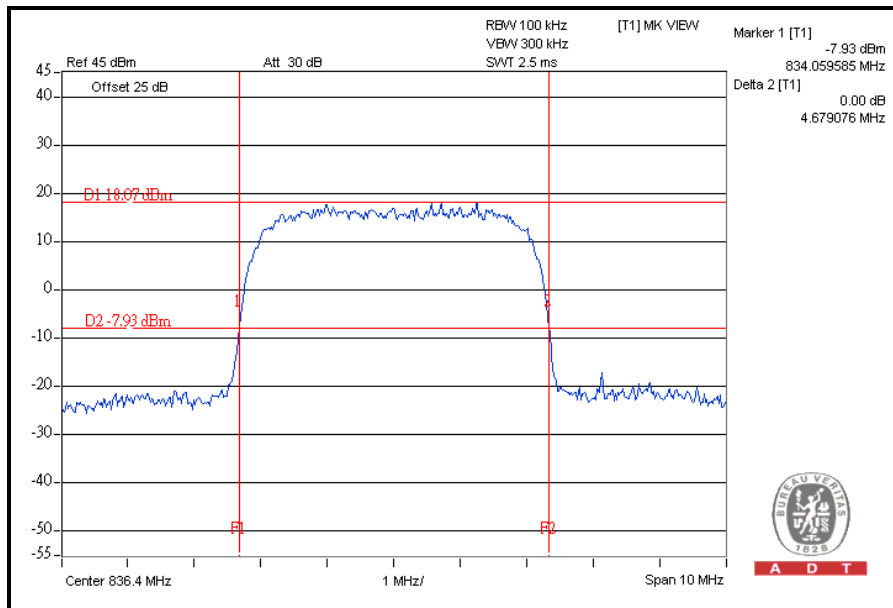


HIGH CHANNEL

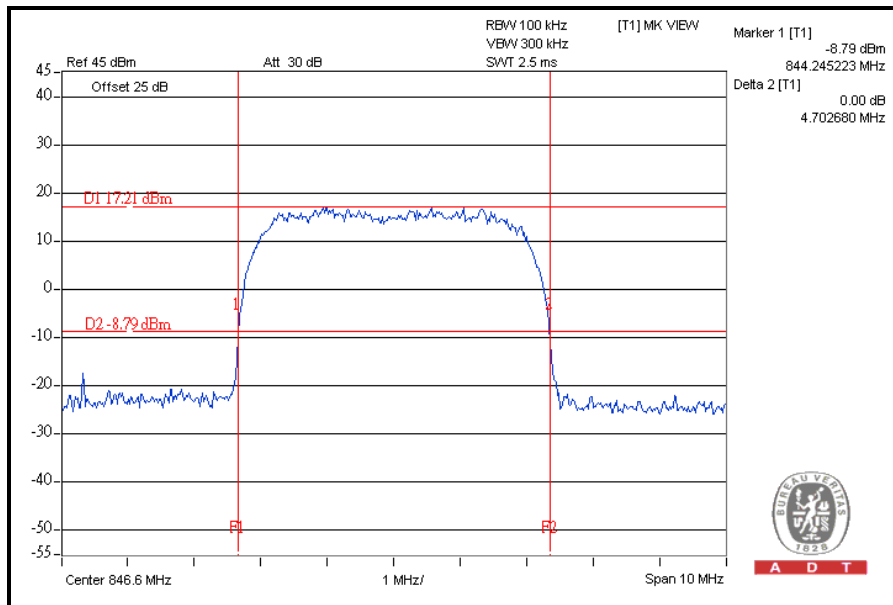

FOR HSDPA BAND:

CHANNEL	MAX. OUTPUT POWER -26 dBc BANDWIDTH (MHz)
LOW	4.681
MIDDLE	4.681
HIGH	4.712


LOW CHANNEL

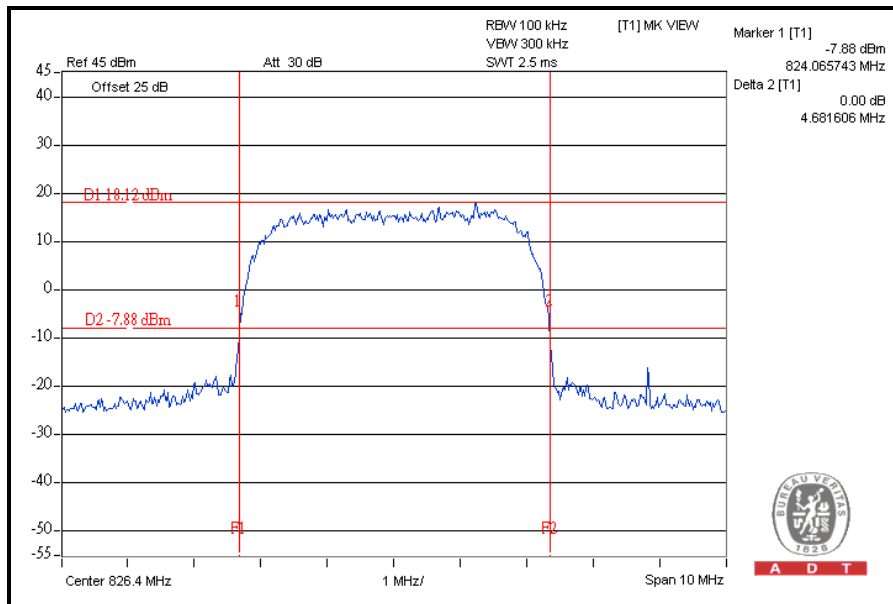




A D T

MIDDLE CHANNEL

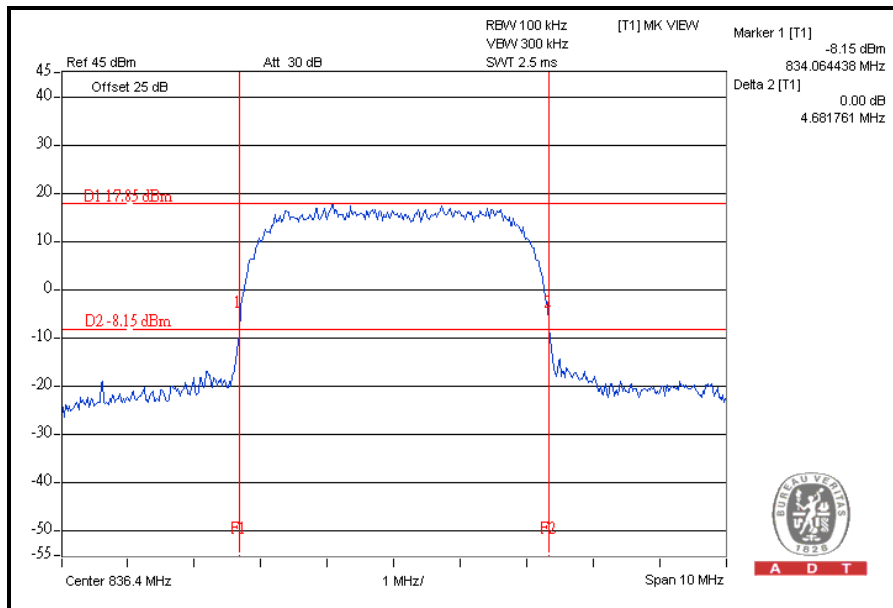

HIGH CHANNEL

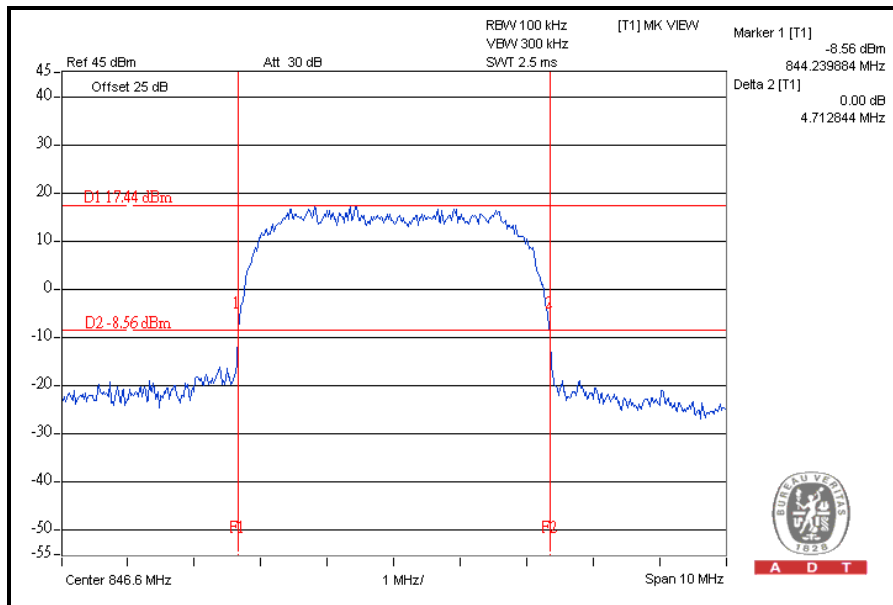

4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC 22.917 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 02, 2010	Aug. 01, 2011
OVEN	MHU-225AU	911033	Dec. 17, 2009	Dec. 16, 2010
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 14, 2010	Aug. 13, 2011
AC POWER SOURCE	6205	1140503	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)

4.4.4 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with GSM / WCDMA link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 128 and 251 / 4132 and 4233 (low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 6dB (GSM band) / 6dB (WCDMA band) in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (for GSM band).
- d. The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (for WCDMA band).
- e. Record the max trace plot into the test report.


4.4.5 EUT OPERATING CONDITION

Same as Item 4.1.5


4.4.6 TEST RESULTS

FOR GSM BAND:

FOR GSM MODE LOWER BAND EDGE

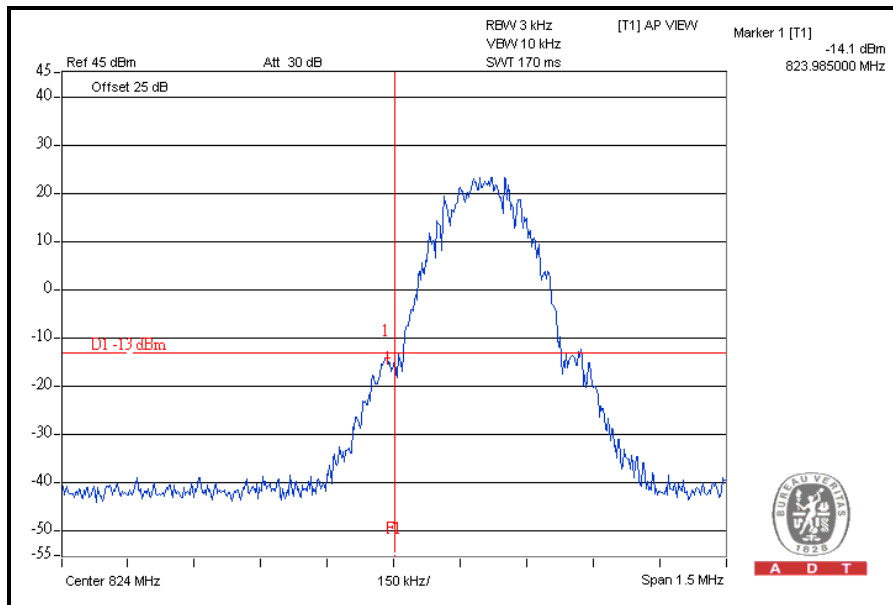


HIGHER BAND EDGE

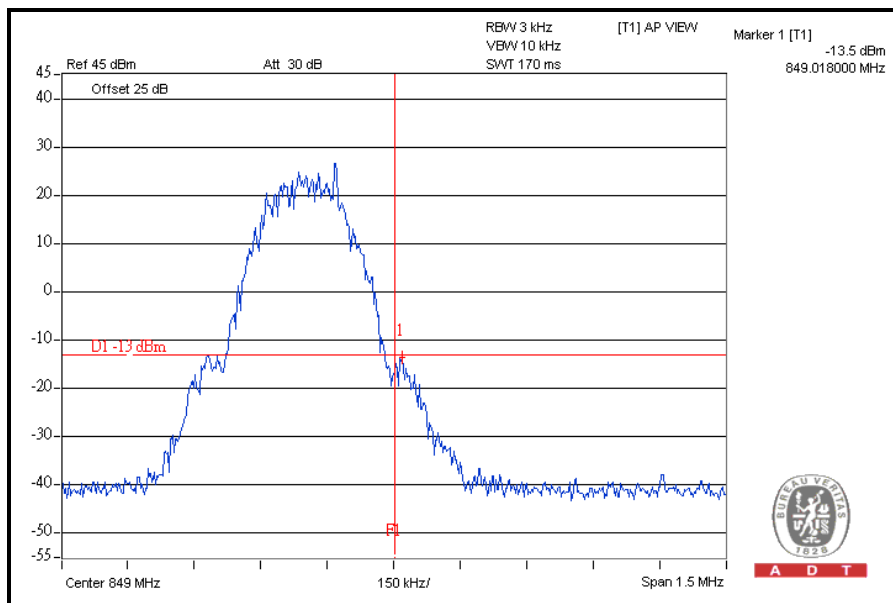




A D T

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT) LOWER BAND EDGE

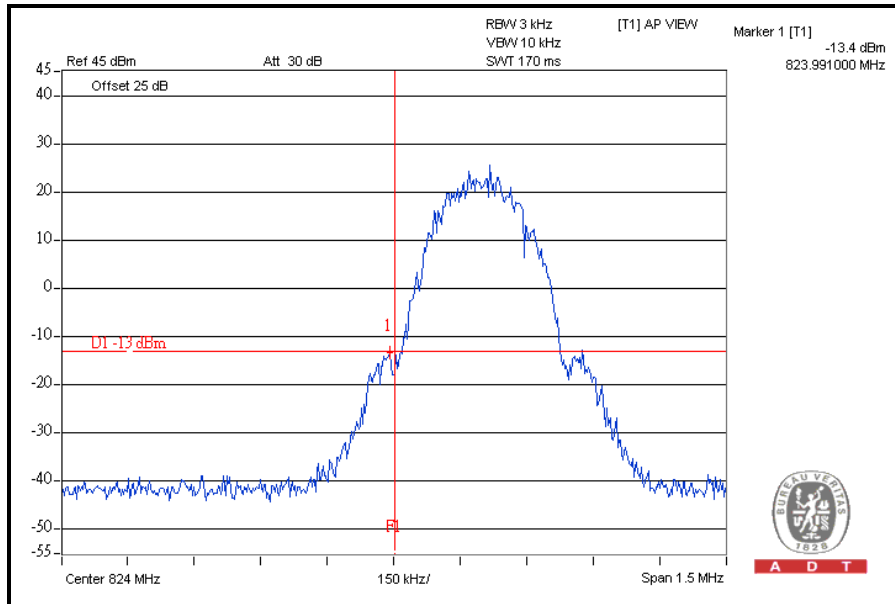


HIGHER BAND EDGE

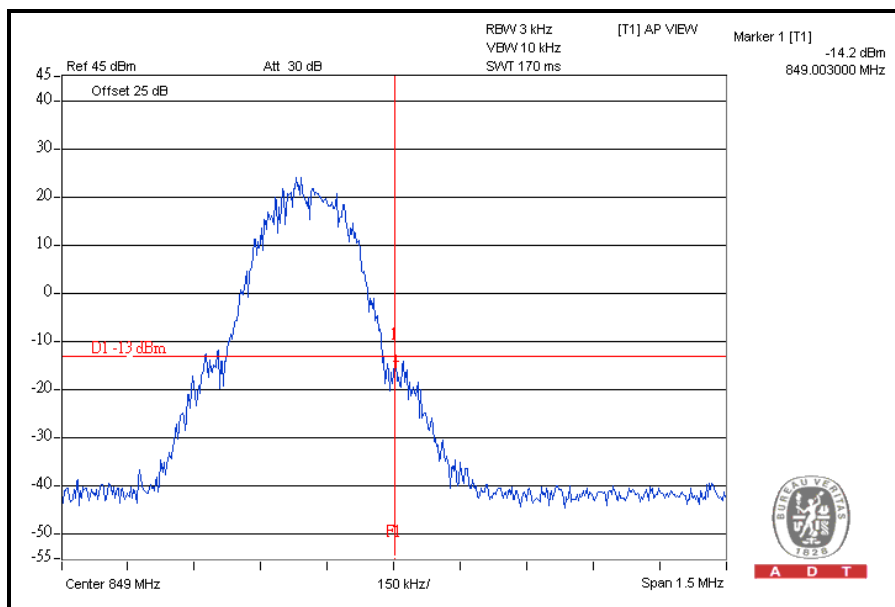




A D T

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT) LOWER BAND EDGE

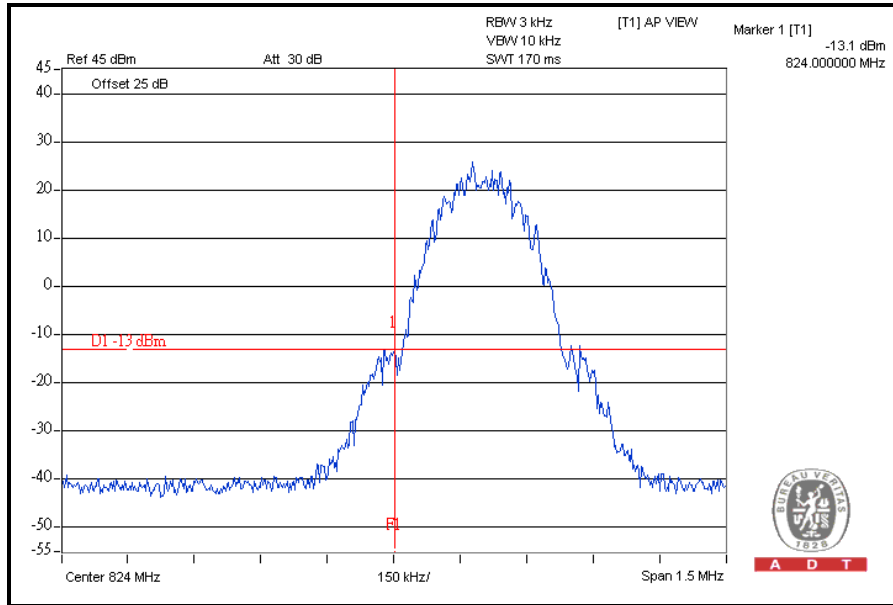


HIGHER BAND EDGE

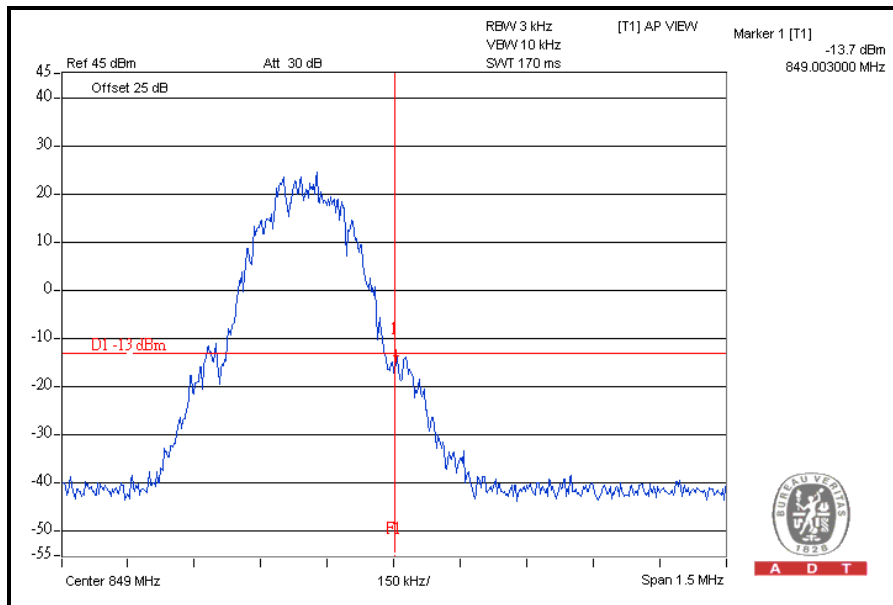


FOR WCDMA BAND:

LOWER BAND EDGE

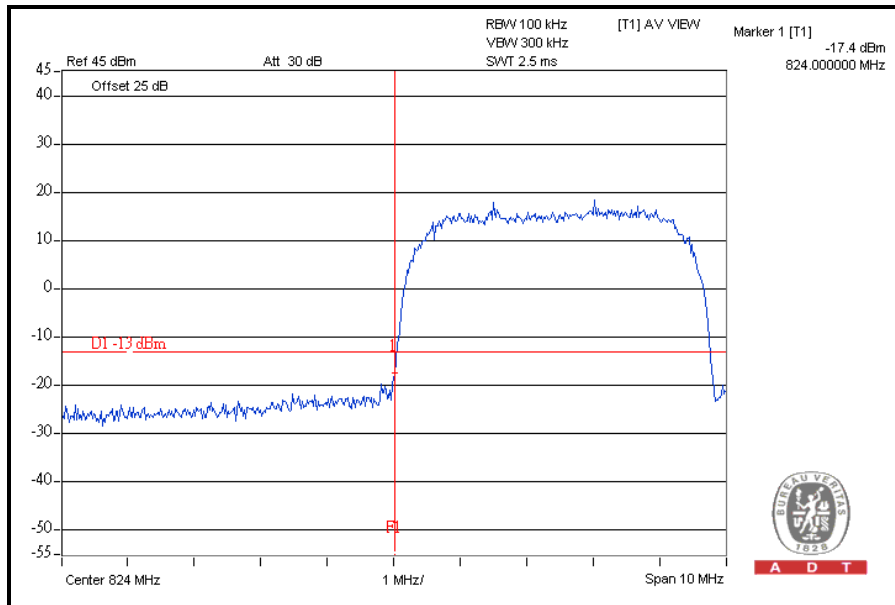

HIGHER BAND EDGE

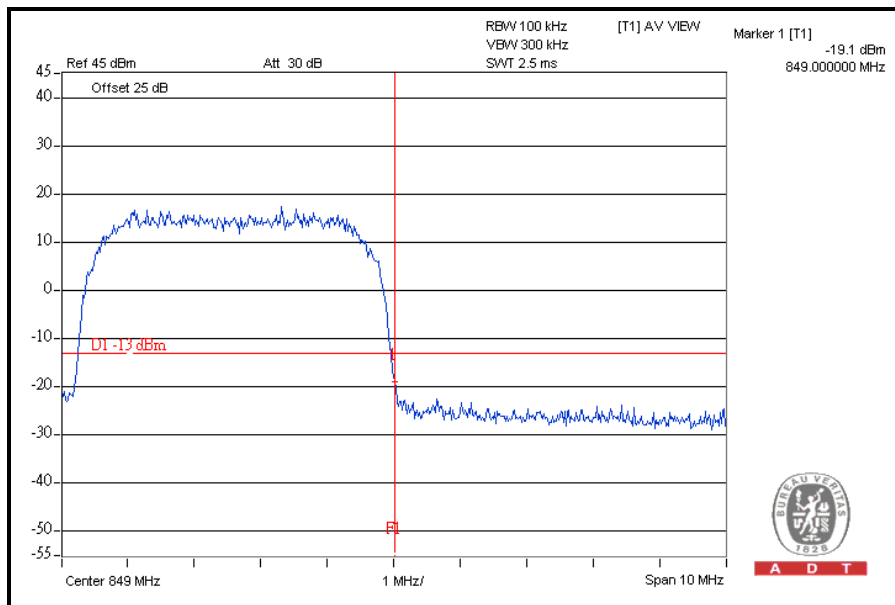





A D T

FOR HSUPA BAND:

LOWER BAND EDGE

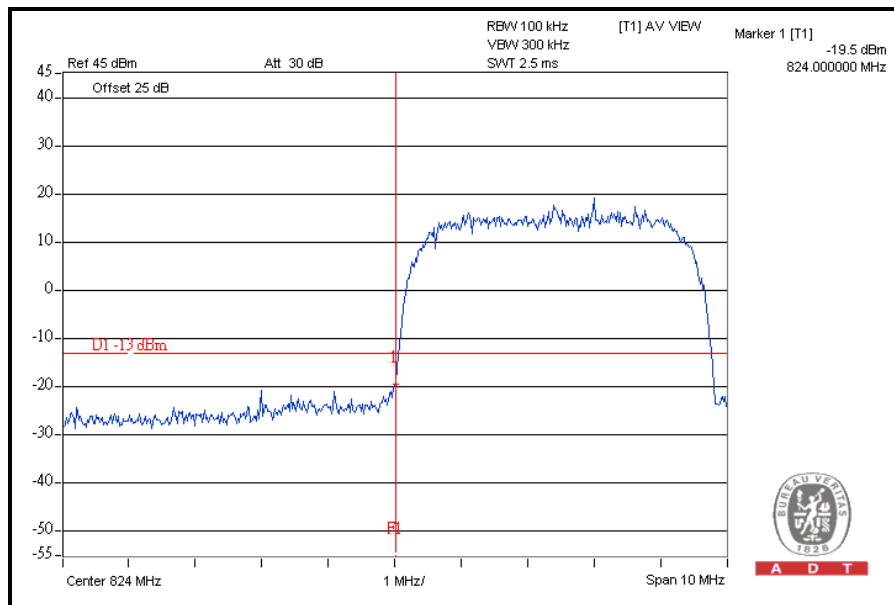


HIGHER BAND EDGE

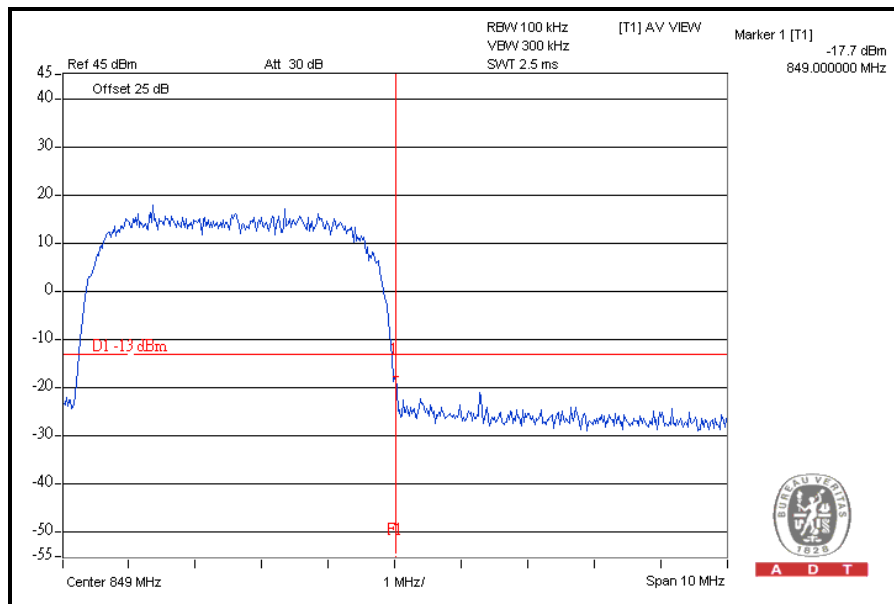


FOR HSDPA BAND:

LOWER BAND EDGE

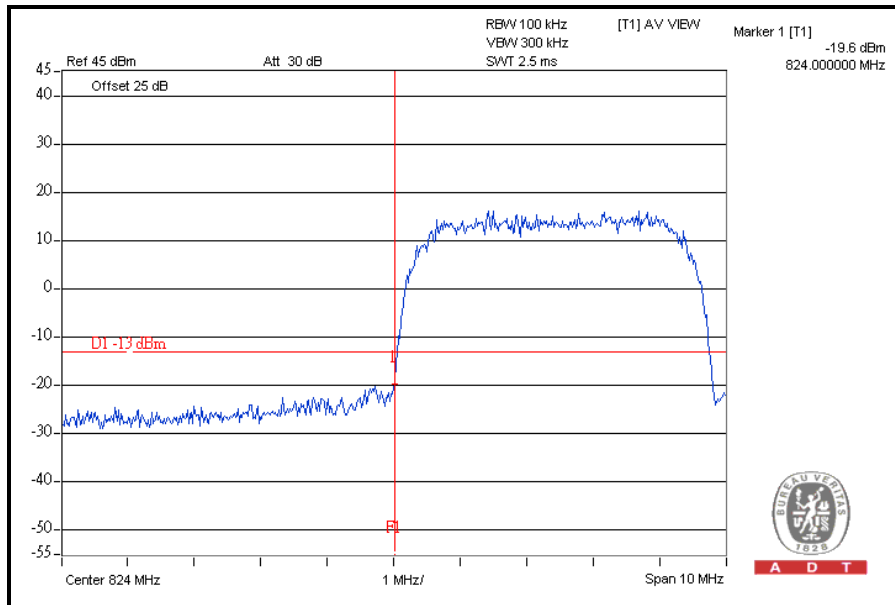

HIGHER BAND EDGE

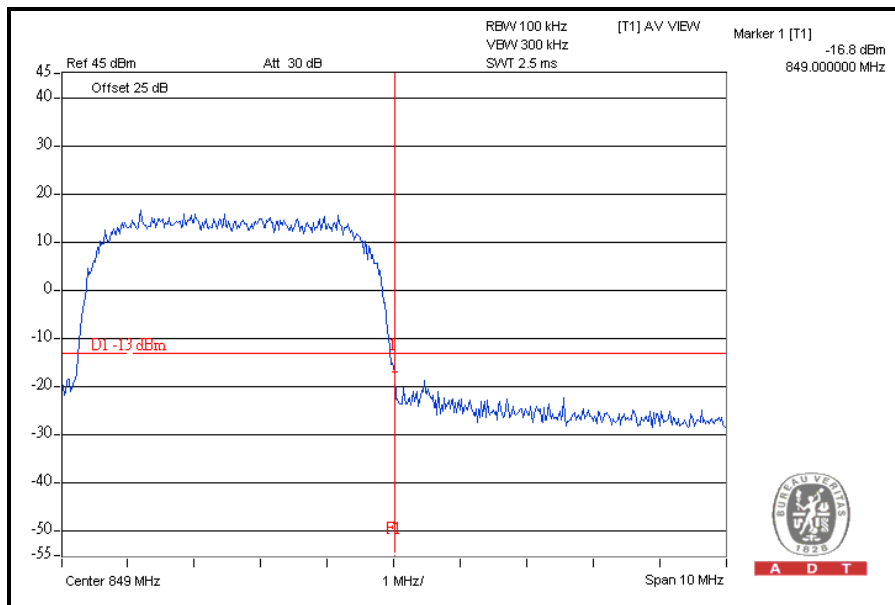

4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 22.917, On any frequency outside a licensee's frequency block within GSM / WCDMA spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission equal to -13dBm .

4.5.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 02, 2010	Aug. 01, 2011
OVEN	MHU-225AU	911033	Dec. 17, 2009	Dec. 16, 2010
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 14, 2010	Aug. 13, 2011
AC POWER SOURCE	6205	1140503	NA	NA
Wainwright Instruments Band Reject Filter	WRCG1850/191 0-1830/1930-60/ 10SS	SN1	NA	NA
* Wainwright Instruments High Pass Filter	WHK3.1/18G-10 SS	SN1	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- a. The EUT was set up for the maximum peak power with GSM / WCDMA link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 / 4132, 4182 and 4233 (low, middle and high operational frequency range.)
- b. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 6dB (GSM band) / 6dB (WCDMA band) in the transmitted path track.
- c. When the spectrum scanned from 9kHz to 1GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz (GSM band) / RB=1MHz, VB=1MHz (WCDMA band).
- d. When the spectrum scanned from 1GHz to 9GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz (GSM band) / RB=1MHz, VB=1MHz (WCDMA band).

4.5.4 TEST SETUP

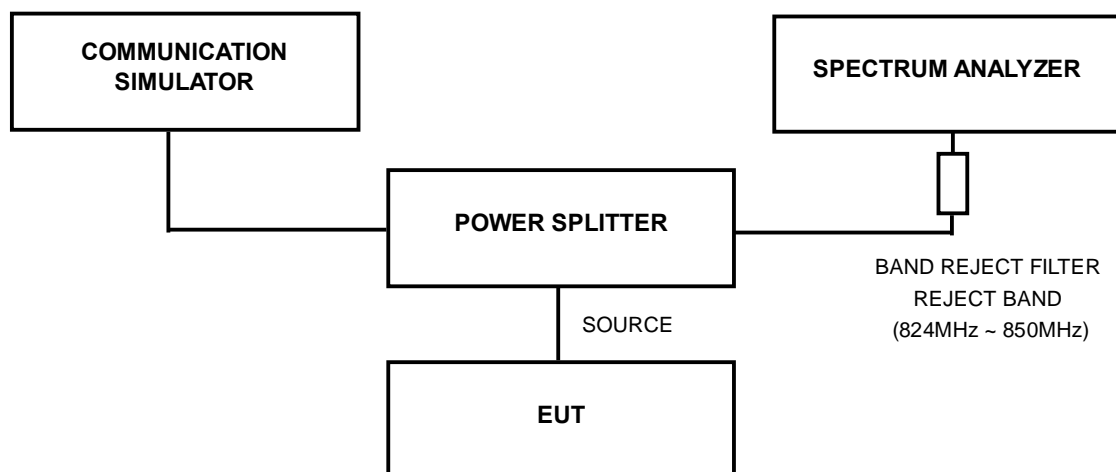


4.5.5 EUT OPERATING CONDITIONS

Same as Item 4.1.5


4.5.6 TEST RESULTS

FOR GSM BAND:

CH 128: 9kHz ~ 1GHz

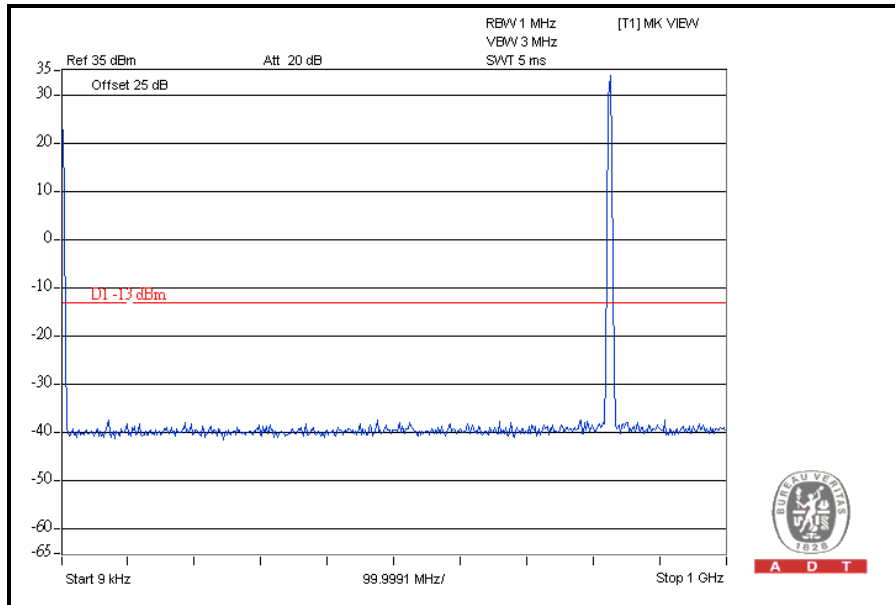


1GHz ~ 4GHz

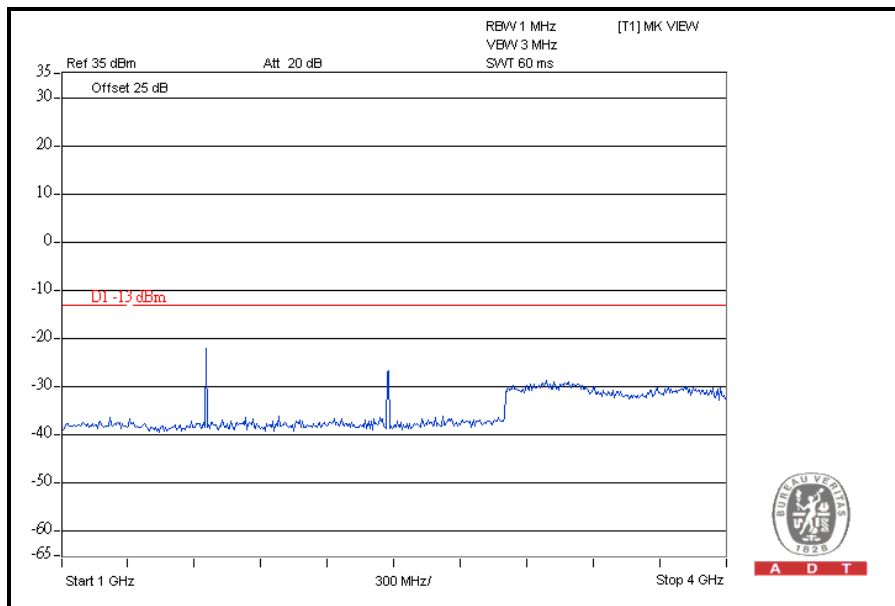



A D T


4GHz ~ 9GHz

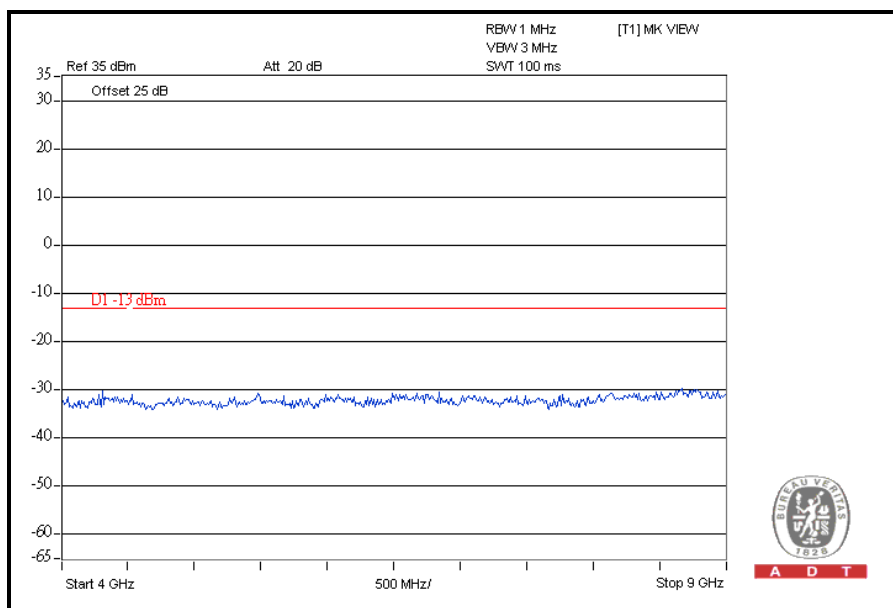




A D T

CH 190: 9kHz ~ 1GHz

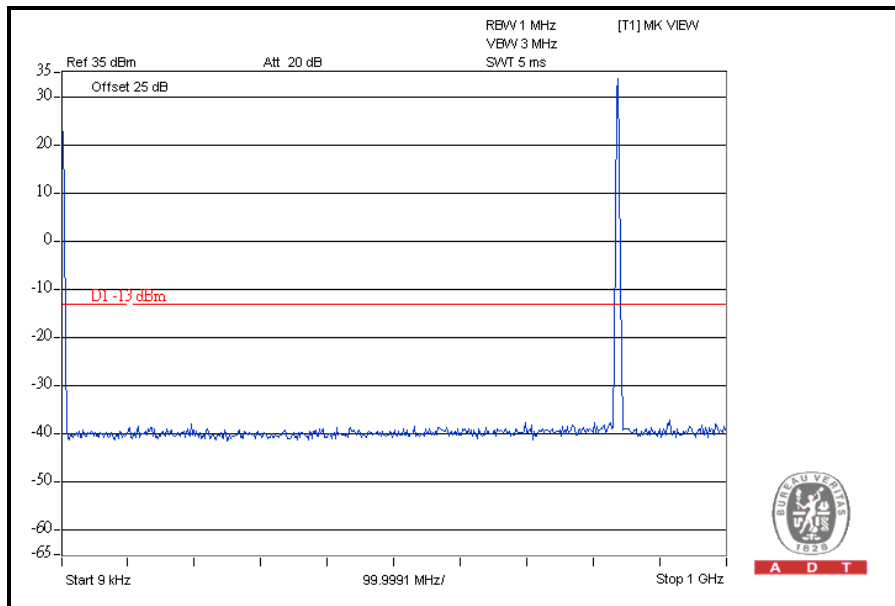


1GHz ~ 4GHz

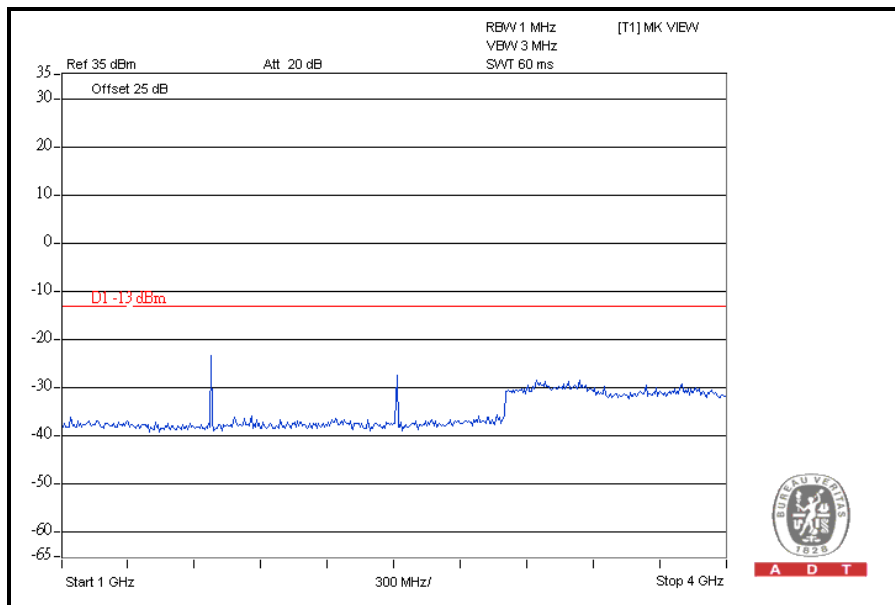



A D T


4GHz ~ 9GHz

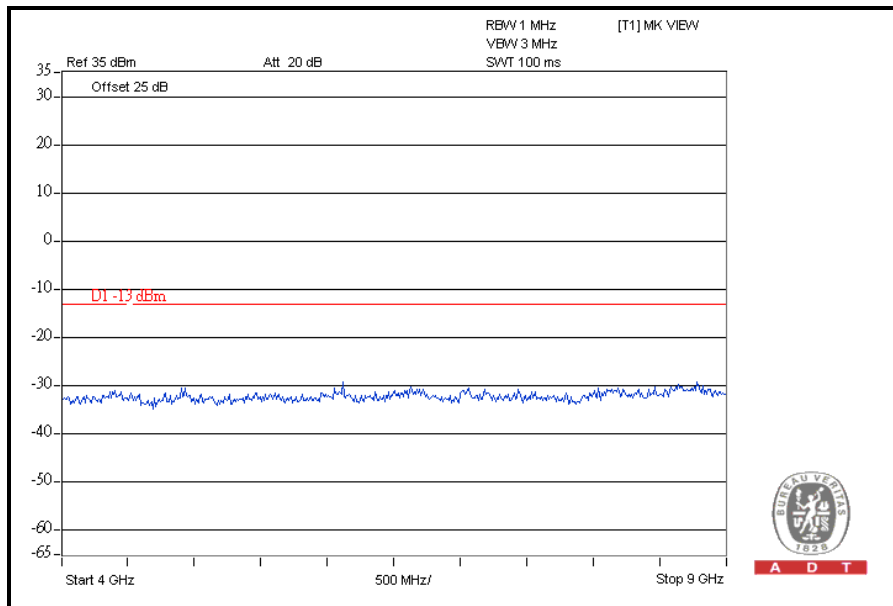




A D T

CH 251: 9kHz ~ 1GHz

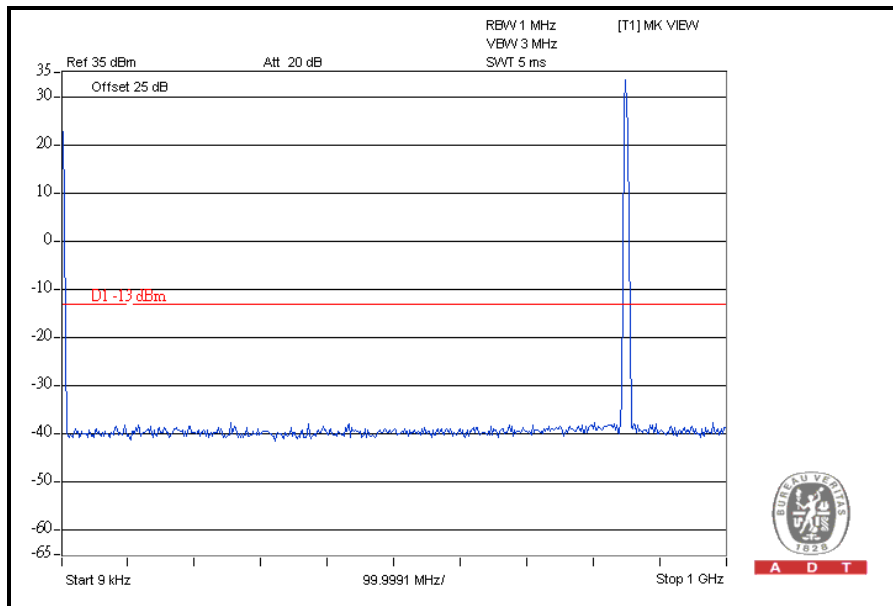


CH 251: 1GHz ~ 4GHz

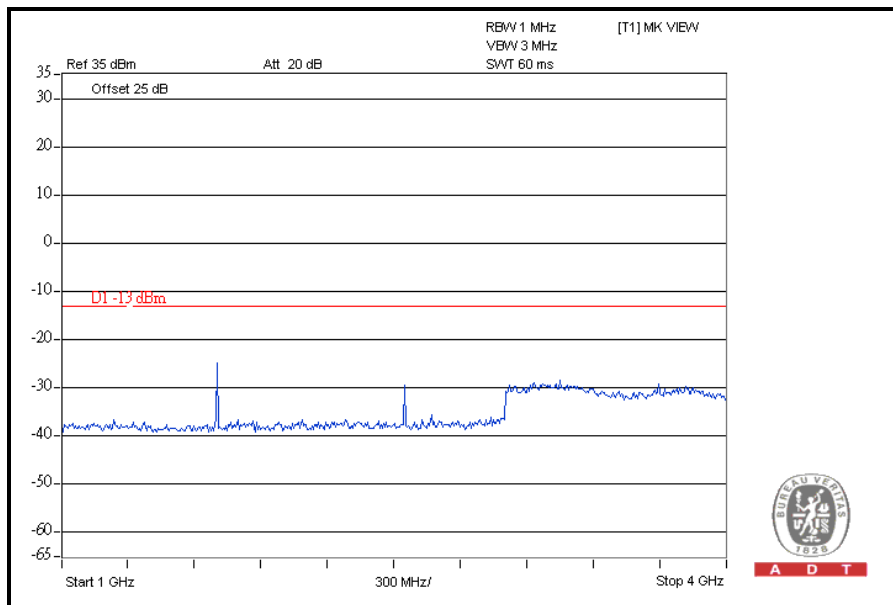




A D T

CH 251: 4GHz ~ 9GHz

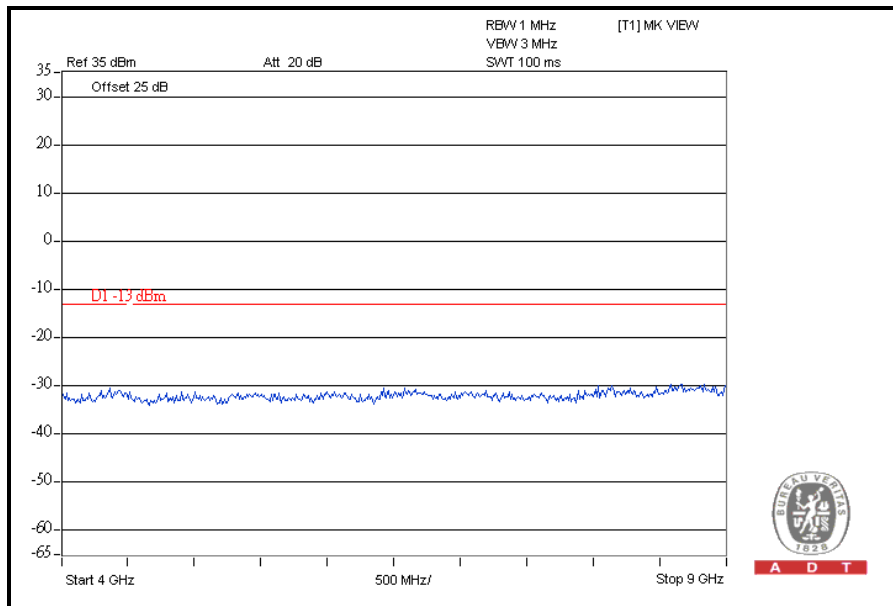


FOR WCDMA BAND:

CH 4132: 9kHz ~ 1GHz

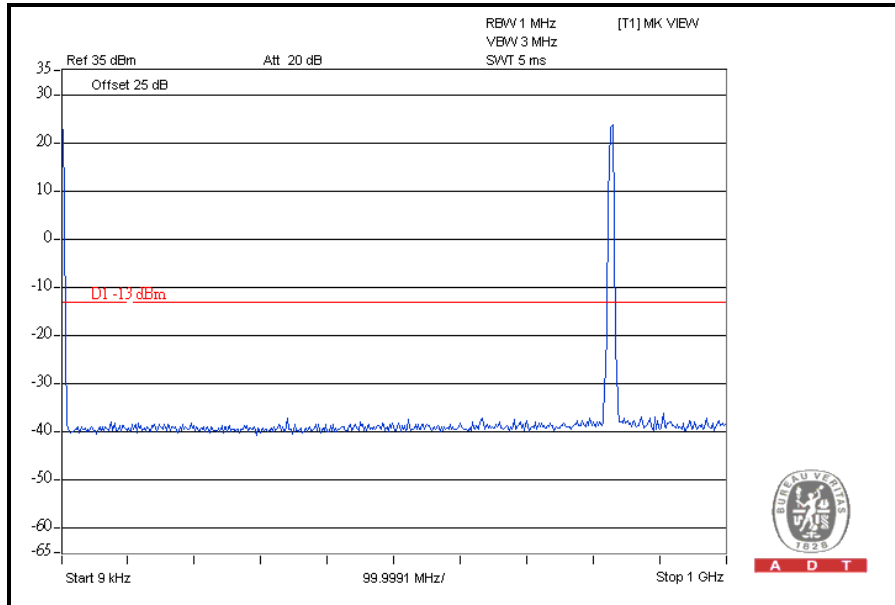


CH 4132: 1GHz ~ 4GHz

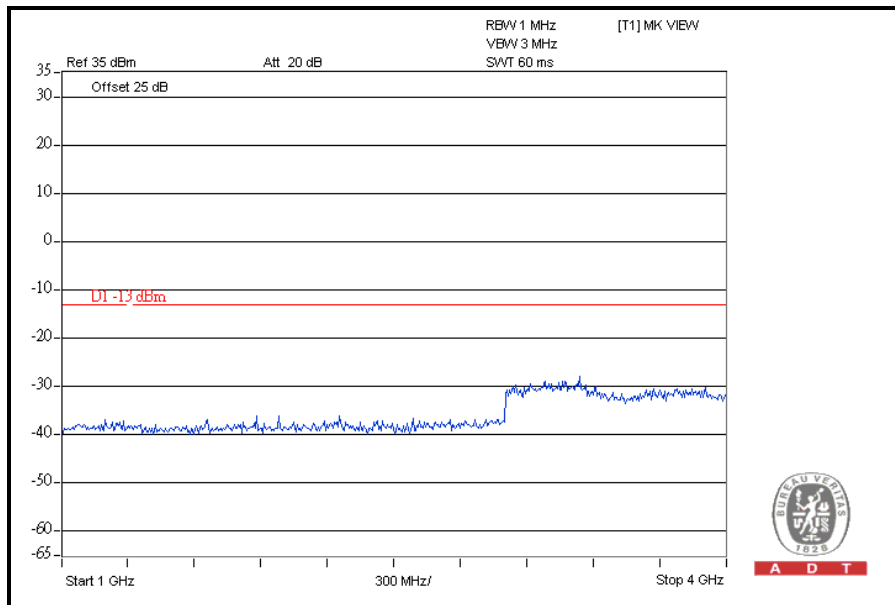



A D T


CH 4132: 4GHz ~ 9GHz

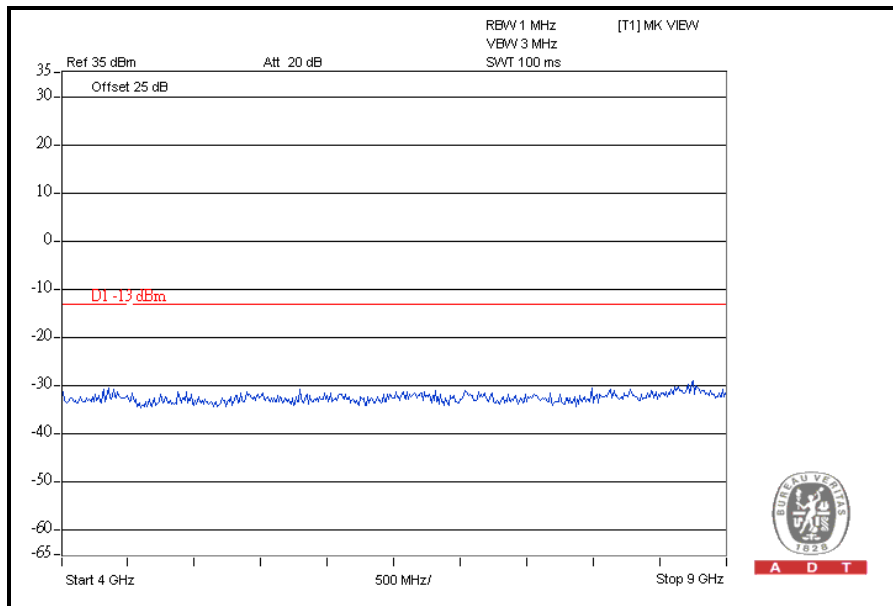




A D T

CH 4182: 9kHz ~ 1GHz

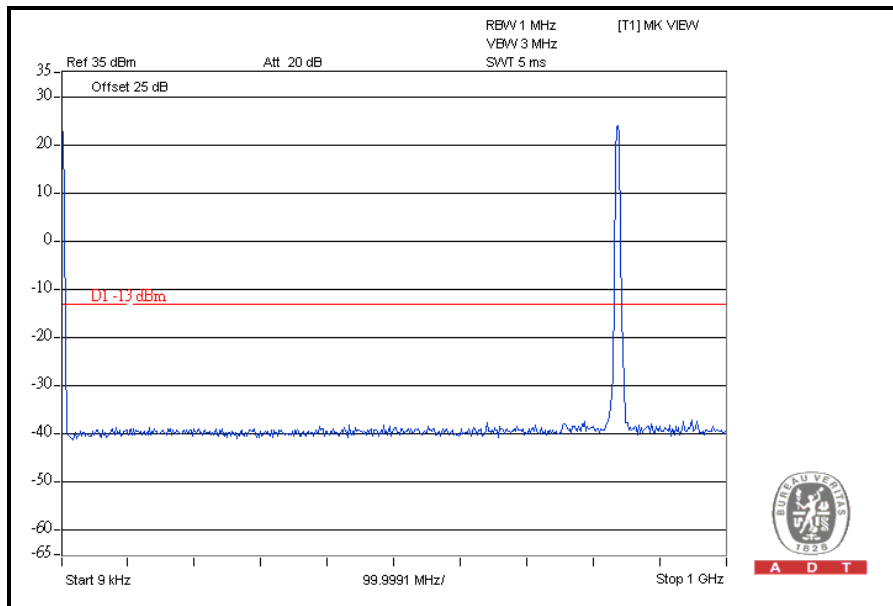


CH 4182: 1GHz ~ 4GHz

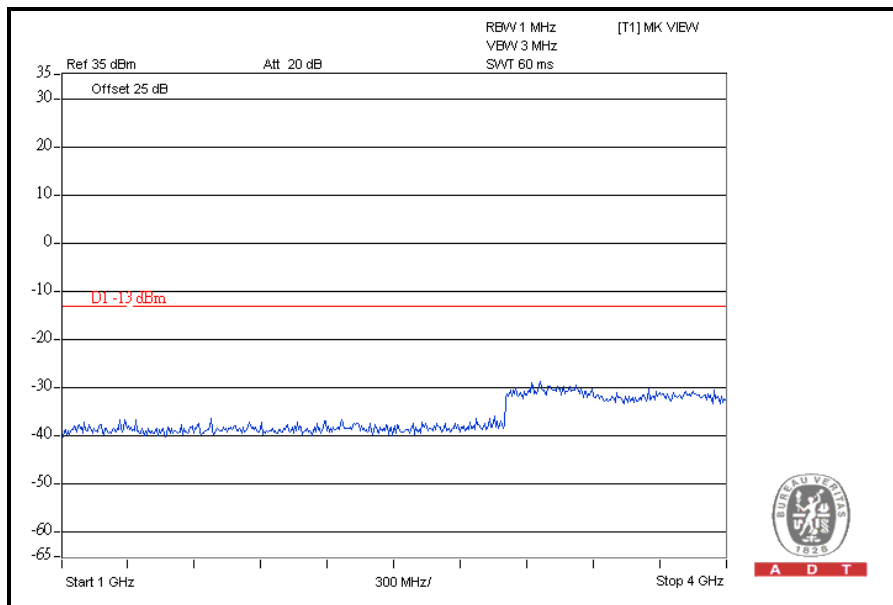



A D T


CH 4182: 4GHz ~ 9GHz

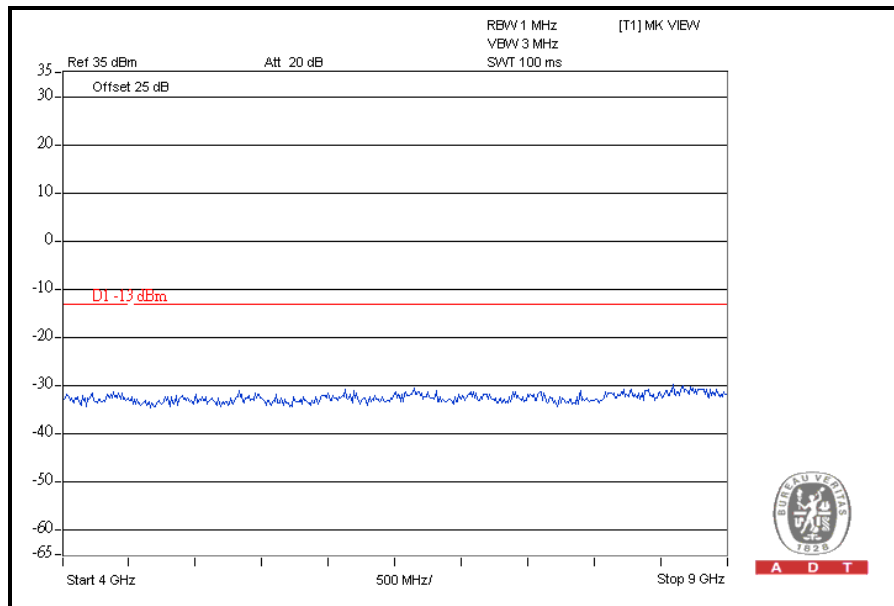




A D T

CH 4233: 9kHz ~ 1GHz

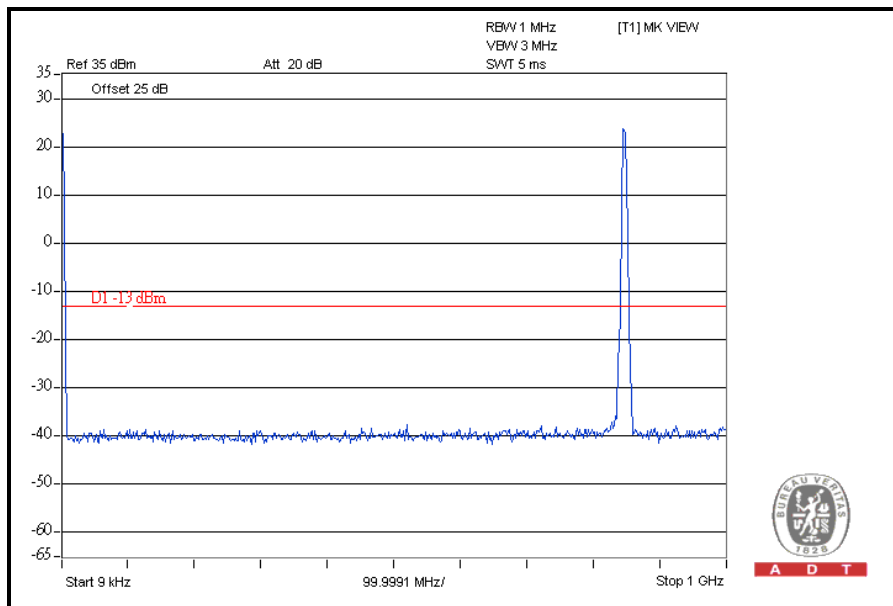


CH 4233: 1GHz ~ 4GHz

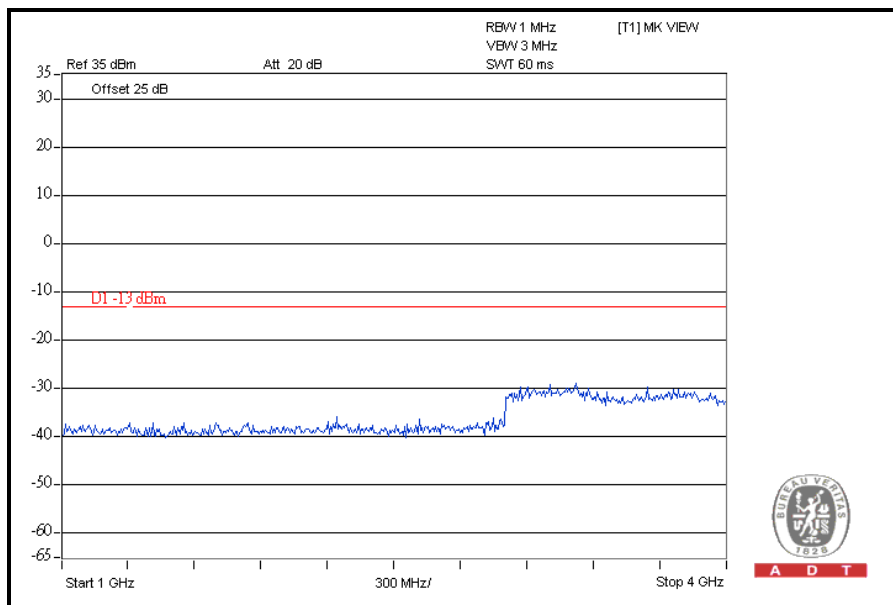



A D T

CH 4233: 4GHz ~ 9GHz

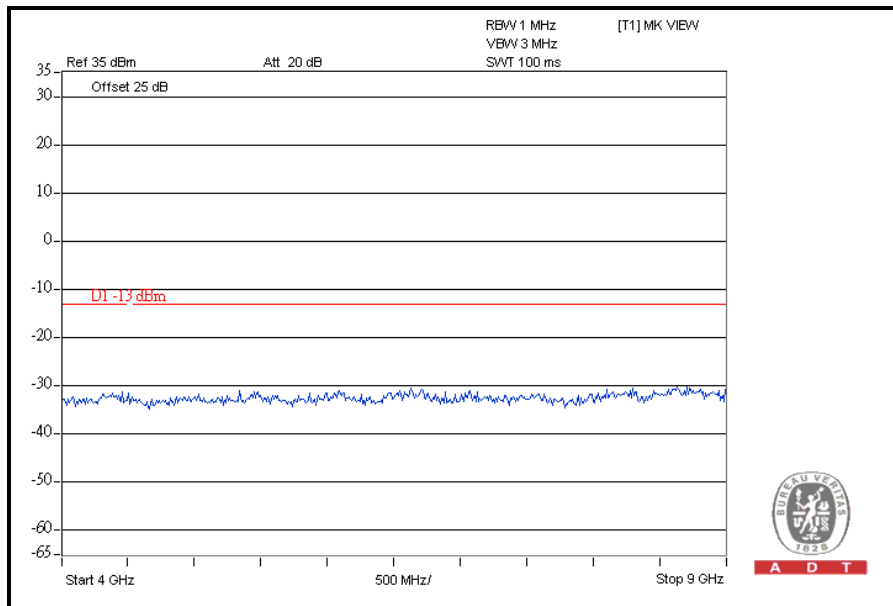

4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 22.917(a), On any frequency outside a licensee's frequency block within GSM / WCDMA spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission of limit equal to -13 dBm. So the limit of emission is the same absolute specified line.

LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBuV/m) (NOTE)
-13	82.22

NOTE: The following formula is used to convert the equipment radiated power to field strength.

$$E = [1000000\sqrt{(30P)}] / 3 \text{ uV/m, where P is Watts.}$$



A D T

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	May 12 , 2010	May 11 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M- 1GHz	NA	NA
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.6.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a ~ f for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1MHz and the video bandwidth is 3MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

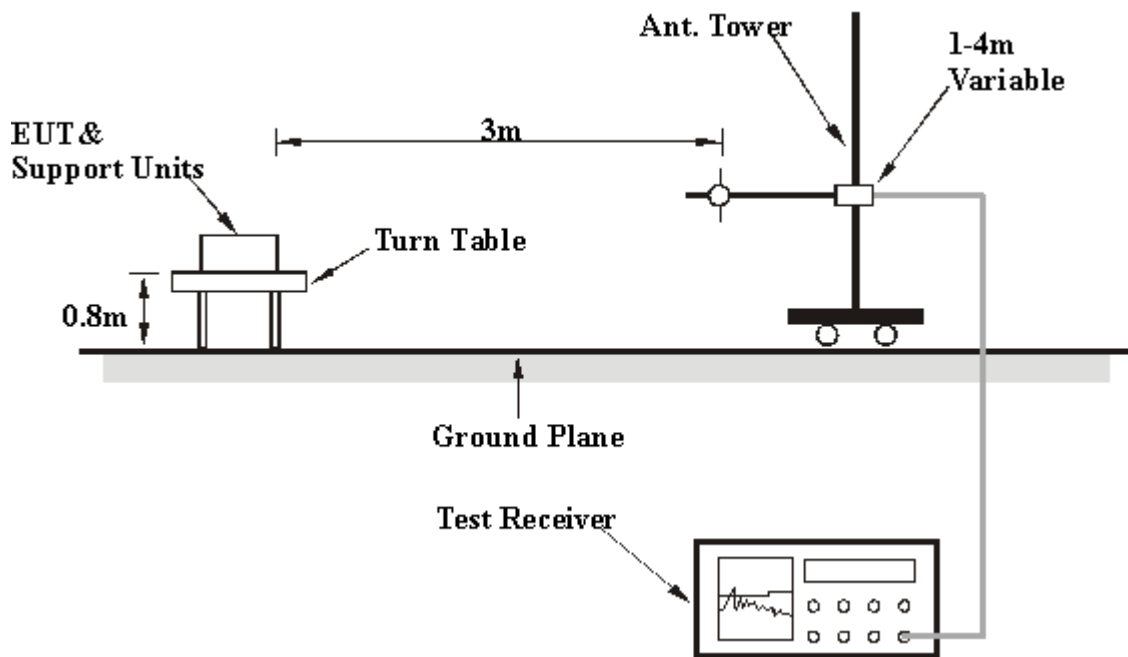

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.6 EUT OPERATING CONDITIONS

Same as Item 4.1.5



A D T

4.6.7 TEST RESULTS

FOR GSM BAND:

MODE	TX channel 251	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	22deg. C, 69%RH, 1015hPa	INPUT POWER	120Vac, 60 Hz
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	212.3	23.5	-13	-71.95	4.18	-67.77
2	426.7	32.87	-13	-65.19	3.05	-62.14
3	500	28.99	-13	-66.53	2.89	-63.64
4	640	30.41	-13	-64.51	1.75	-62.76
5	583.3	31.41	-13	-63.49	1.00	-62.49
6	960	33.24	-13	-64.59	0.39	-64.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	212.3	24.45	-13	-71.00	4.18	-66.82
2	426.7	33.14	-13	-64.92	3.05	-61.87
3	500	29.59	-13	-65.93	2.89	-63.04
4	640	31.32	-13	-63.60	1.75	-61.85
5	583.3	32.51	-13	-62.39	1.00	-61.39
6	960	32.46	-13	-65.37	0.39	-64.98

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

FOR WCDMA BAND:

MODE	TX channel 4233	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	22deg. C, 69%RH, 1015hPa	INPUT POWER	120Vac, 60 Hz
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	212.3	23.45	-13	-72.00	4.18	-67.82
2	426.7	32.81	-13	-65.25	3.05	-62.20
3	500	29.05	-13	-66.47	2.89	-63.58
4	640	30.38	-13	-64.54	1.75	-62.79
5	583.3	31.32	-13	-63.58	1.00	-62.58
6	960	33.27	-13	-64.56	0.39	-64.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	212.3	24.58	-13	-70.87	4.18	-66.69
2	426.7	32.91	-13	-65.15	3.05	-62.10
3	500	29.64	-13	-65.88	2.89	-62.99
4	640	31.38	-13	-63.54	1.75	-61.79
5	583.3	32.7	-13	-62.20	1.00	-61.20
6	960	32.3	-13	-65.53	0.39	-65.14

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 22.917 (a), On any frequency outside a licensee's frequency block within GSM / WCDMA spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission equal to -13dBm .



A D T

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	May 12 , 2010	May 11 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 03, 2010	Sep. 02, 2011
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 104+ Sucoflex 106	RF104-101+R F106-101	Aug. 24, 2010	Aug. 23, 2011
RF Cable	8DFB	STCCAB-30M- 1GHz	NA	NA
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.7.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a ~ f for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

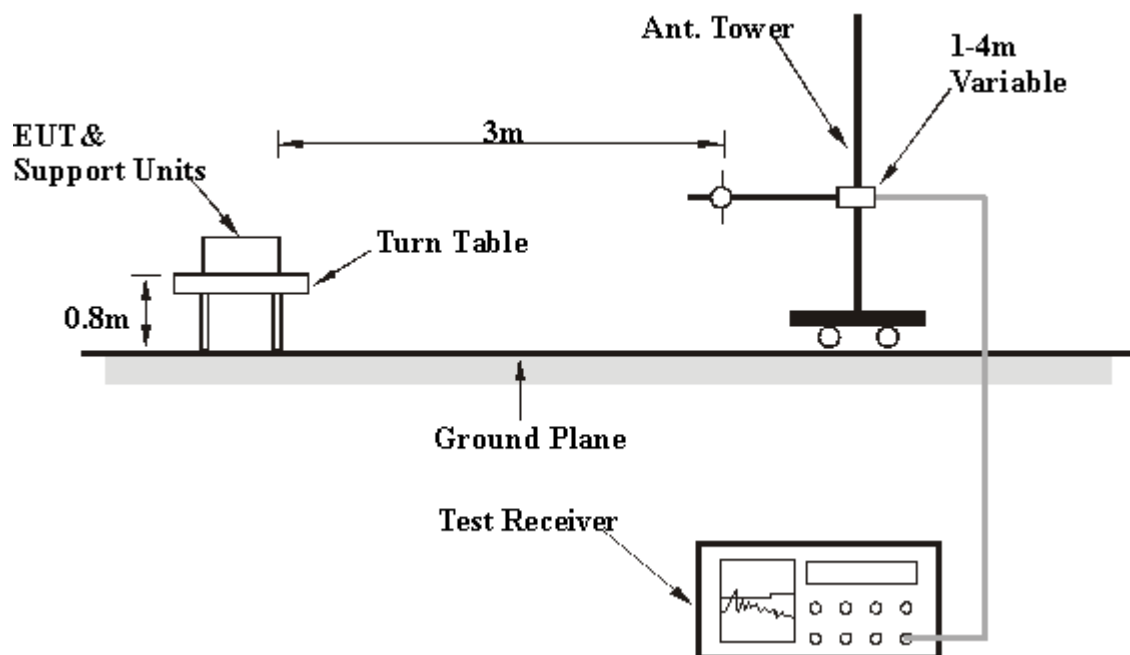

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.6 EUT OPERATING CONDITIONS

Same as Item 4.1.5



A D T

4.7.7 TEST RESULTS

FOR GSM BAND:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	72.26	-13	-30.49	6.26	-24.23
2	2472.6	62.74	-13	-35.84	6.66	-29.18
3	3296.8	41.62	-13	-61.33	7.56	-53.78
4	4121	42.69	-13	-62.22	7.47	-54.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	70.25	-13	-32.50	6.26	-26.24
2	2472.6	62.15	-13	-36.43	6.66	-29.77
3	3296.8	40.26	-13	-62.69	7.56	-55.14
4	4121	40.58	-13	-64.33	7.47	-56.86

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	TX channel 190	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	76.25	-13	-26.38	6.31	-20.07
2	2509.8	67.24	-13	-31.28	6.66	-24.62
3	3346.4	43.95	-13	-59.06	7.63	-51.43
4	4183	43.77	-13	-61.07	7.44	-53.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	64.35	-13	-38.28	6.31	-31.97
2	2509.8	62.33	-13	-36.19	6.66	-29.53
3	3346.4	41.58	-13	-61.43	7.63	-53.80
4	4183	42.57	-13	-62.27	7.44	-54.83

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	TX channel 251	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	75.16	-13	-27.35	6.35	-20.99
2	2546.4	64.58	-13	-34.25	6.69	-27.55
3	3395.2	45.58	-13	-57.49	7.70	-49.79
4	4244	44.96	-13	-59.82	7.42	-52.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	64.78	-13	-37.73	6.35	-31.37
2	2546.4	63.57	-13	-35.26	6.69	-28.56
3	3395.2	42.51	-13	-60.56	7.70	-52.86
4	4244	43.16	-13	-61.62	7.42	-54.20

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

FOR WCDMA BAND:

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBUV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	71.24	-13	-31.49	6.27	-25.22
2	2479.2	61.9	-13	-36.65	6.66	-29.99
3	3305.6	41.2	-13	-61.76	7.57	-54.19
4	4132	41.4	-13	-63.50	7.47	-56.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBUV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	69.75	-13	-32.98	6.27	-26.71
2	2479.2	62.04	-13	-36.51	6.66	-29.85
3	3305.6	40	-13	-62.96	7.57	-55.39
4	4132	40.4	-13	-64.50	7.47	-57.03

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1672.8	75	-13	-27.63	6.31	-21.32
2	2509.2	65.4	-13	-33.12	6.66	-26.46
3	3345.6	42.4	-13	-60.61	7.63	-52.98
4	4182	42.9	-13	-61.94	7.44	-54.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1672.8	63.35	-13	-39.28	6.31	-32.97
2	2509.2	61.3	-13	-37.22	6.66	-30.56
3	3345.6	40.4	-13	-62.61	7.63	-54.98
4	4182	40.9	-13	-63.94	7.44	-56.50

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 63%RH, 1015hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	74.1	-13	-28.43	6.34	-22.08
2	2539.8	63.6	-13	-35.17	6.69	-28.48
3	3386.4	42.6	-13	-60.46	7.69	-52.78
4	4233	43.1	-13	-61.69	7.42	-54.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	63.86	-13	-38.67	6.34	-32.32
2	2539.8	61.2	-13	-37.57	6.69	-30.88
3	3386.4	40.6	-13	-62.46	7.69	-54.78
4	4233	40.8	-13	-63.99	7.42	-56.57

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---