



FCC 47 CFR PART 15 SUBPART C: 2008 AND ANSI C63.4: 2003

TEST REPORT

For

Wireless N 300 Router

Model Number: DIR-514

Brand Name: D-Link

Issued for

D-Link Corporation

No.289 , Sinhu 3rd Rd. , Neihu District , Taipei City 114 , Taiwan R.O.C.

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8,Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: 886-6-580-2201

FAX: 886-6-580-2202

Date of Issue: February 10, 2012



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	December 05, 2011	Initial Issue	ALL	Sunny Chang
01	February 10, 2012	1.Change the raw uV data to dBuV/m 2.Update test data	Page 50, 117-118	Sunny Chang



TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION 4

2. EUT DESCRIPTION 5

3. DESCRIPTION OF TEST MODES 6

4. TEST METHODOLOGY 7

5. FACILITIES AND ACCREDITATIONS 7

 5.1 FACILITIES7

 5.2 EQUIPMENT7

 5.3 LABORATORY ACCREDITATIONS LISTINGS7

 5.4 TABLE OF ACCREDITATIONS AND LISTINGS8

6. CALIBRATION AND UNCERTAINTY 9

 6.1 MEASURING INSTRUMENT CALIBRATION9

 6.2 MEASUREMENT UNCERTAINTY9

7. SETUP OF EQUIPMENT UNDER TEST 10

 7.1 SETUP CONFIGURATION OF EUT10

 7.2 SUPPORT EQUIPMENT11

 7.3 EUT OPERATING CONDITION12

8. APPLICABLE LIMITS AND TEST RESULTS 13

 8.1 6DB BANDWIDTH13

 8.2 MAXIMUM PEAK OUTPUT POWER28

 8.3 MAXIMUM PERMISSIBLE EXPOSURE32

 8.4 POWER SPECTRAL DENSITY34

 8.5 CONDUCTED SPURIOUS EMISSION48

 8.6 RADIATED EMISSIONS70

 8.7 POWERLINE CONDUCTED EMISSIONS118

9. ANTENNA REQUIREMENT 122

 9.1 STANDARD APPLICABLE122

 9.2 ANTENNA CONNECTED CONSTRUCTION122

APPENDIX SETUP PHOTOS 123

APPENDIX II PHOTOGRAPHS OF EUTA1



1. TEST REPORT CERTIFICATION

Applicant : D-Link Corporation

Address : No.289 , Sinhu 3rd Rd. , Neihu District , Taipei City 114 , Taiwan R.O.C.

Manufacture : Advance Multimedia Internet Technology Inc.

Address : No. 28, Lane 31, Sec. 1, Huandong Rd., Sinshih District, Tainan City
74146, Taiwan

Equipment Under Test : Wireless N 300 Router

Model Number : DIR-514

Brand Name : D-Link

Date of Test : November 15, 2011 ~ February 10, 2012

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C : 2008 AND ANSI C63.4 : 2003	No non-compliance noted

Approved by:

Jeter Wu
Assistant Manager

Reviewed by:

Eric Huang
Assistant Section Manager



2. EUT DESCRIPTION

Product Name	Wireless N 300 Router
Model Number	DIR-514
Brand Name	D-Link
Received Date	November 14, 2011
Frequency Range	IEEE 802.11b/g, 802.11n HT20 (DTS Band):2412MHz ~ 2462MHz IEEE 802.11n HT40 (DTS Band):2422MHz ~ 2452MHz
Transmit Power	IEEE 802.11b Mode : 13.13dBm (DTS Band) (20.5589mW) IEEE 802.11g Mode :19.82dBm (DTS Band) (95.9401mW) IEEE 802.11n HT20 Mode : 23.38dBm (DTS Band) (217.606mW) IEEE 802.11n HT40 Mode : 21.75dBm (DTS Band) (149.522mW)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 130, 117, 104, 78, 52, 39, 26, 13 Mbps IEEE 802.11n HT40 : 300, 270, 243, 216, 162, 108, 81, 54, 27Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Frequency Selection	By software / firmware
Antenna Type	Antenna*2 1.PIFA antenna 1 (1T1R) Type: Monoport Antenna Model: MSA-1507-2G4C1-A1 Gain: 0.259 dBi 2.PIFA antenna 2 (1T1R) Type: Monoport Antenna Model: MSA-1507-2G4C1-A1 Gain: 3.169 dBi
Power Source	Powered from adapter Brand: D-Link Model: AMS1-0501200FU Input: 100-240Vac, 50/60Hz, 0.5A Output: 5Vdc, 1.2A
Temperature Range	0 ~ +55°C

REMARK:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **KA2IR514A1** filing to comply with Section 15.207,15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.



3. DESCRIPTION OF TEST MODES

The EUT is a 11n router. It has two transmitter chains and two receive chains (2x2 configurations). The 2x2 configuration is implemented with two outside chains (Chain 0 and Chain 1).

The RF chipset is manufactured by Ralink Technology, Corp.

The antenna peak gain 3.169dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps long data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 13Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode: 27Mbps data rate (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD, peak power and average power across all the data rates, bandwidths, modulations and spatial stream modes.

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2452 MHz.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037).



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	$\pm 3.59\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	$\pm 3.27\text{dB}$
Radiated Emission, 1 to 26.5 GHz	$\pm 3.20\text{dB}$
Power Line Conducted Emission	$\pm 2.90\text{dB}$


Uncertainty figures are valid to a confidence level of 95%, K=2




7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

For RF test

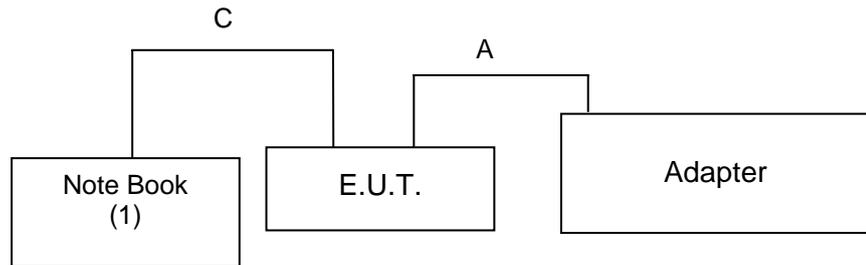

For EMI test

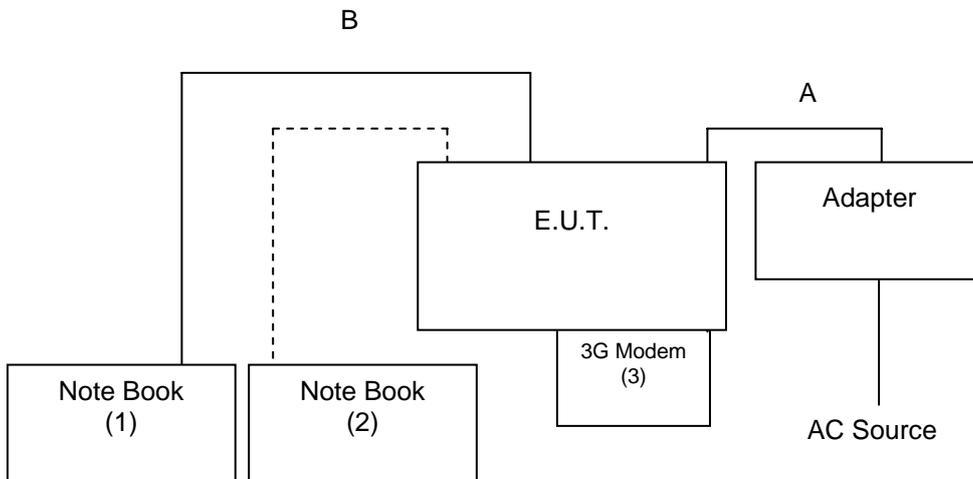



7.2 SUPPORT EQUIPMENT

RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1.	Note Book	IBM	R50E	DoC	Power cable, unshd, 1.6m

No.	Signal cable description	
A	DC	Unshielded, 1.5m, 1pcs.

EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1.	Note Book	IBM	R50E	DoC	Power cable, unshd, 1.6m
2.	Note Book	IBM	MS-1452	N/A	Power cable, unshd, 1.6m
3.	3G Modem	NOVATEL	Qualcomm 3G CDMA	PKRNVW MC727	N/A

No.	Signal cable description	
A	Power	Shielded, 1.7, 1pcs.
B	LAN	Shielded, 10, 1pcs.
C	LAN	Shielded, 10m, 1pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7.3 EUT OPERATING CONDITION

RF Setup

1. Set up all computers like the setup diagram.
2. The “Ralink QA Test Program for RT3352QA” software was used for testing
The EUT driver software installed in the host support equipment during testing was Ralink QA Test Program for RT3352QA Drive

TX Mode:

- ⇒ **Tx Mode:**CCK 、 OFDM、 HT MixMode (Bandwidth: 20、 40)
- ⇒ **Tx Data Rate:** 1Mbps long (IEEE 802.11b mode , TX)
6Mbps (IEEE 802.11g mode , TX)
13Mbps (IEEE 802.11n HT20 mode ,chain 0, chain 1 TX)
27Mbps (IEEE 802.11n HT40 mode, chain 0, chain 1 TX)

Power control mode

- Target Power:** IEEE 802.11b Channel Low (2412MHz) = 04
IEEE 802.11b Channel Middle (2437MHz) =05
IEEE 802.11b Channel High (2462MHz) = 08
- Target Power:** IEEE 802.11g Channel Low (2412MHz) = 04
IEEE 802.11g Channel Middle (2437MHz) = 05
IEEE 802.11g Channel High (2462MHz) = 08
- Target Power:** IEEE 802.11n HT20 Channel Low (2412MHz) = 04 **(Chain 0)**
IEEE 802.11 n HT20 Channel Middle (2437MHz) = 05 **(Chain 0)**
IEEE 802.11 n HT20 Channel High (2462MHz) = 08 **(Chain 0)**
IEEE 802.11n HT20 Channel Low (2412MHz) = 04 **(Chain 1)**
IEEE 802.11 n HT20 Channel Middle (2437MHz) = 05 **(Chain 1)**
IEEE 802.11 n HT20 Channel High (2462MHz) = 08 **(Chain 1)**
- Target Power:** IEEE 802.11n HT40 Channel Low (2422MHz) = 04 **(Chain 0)**
IEEE 802.11 n HT40 Channel Middle (2437MHz) = 05 **(Chain 0)**
IEEE 802.11 n HT40 Channel High (2452MHz) = 03 **(Chain 0)**
IEEE 802.11n HT40 Channel Low (2422MHz) = 04 **(Chain 1)**
IEEE 802.11 n HT40 Channel Middle (2437MHz) = 05 **(Chain 1)**
IEEE 802.11 n HT40 Channel High (2452MHz) = 03 **(Chain 1)**

(2) **RX Mode :**

MAC Address: FFFFFFFF

Start RX

3. All of the function are under run.
4. Start test.

Normal Link Setup

1. Set up all computers like the setup diagram.
 2. All of the function are under run.
 3. Notebook PC (2) ping 192.168.0.10 –t to Notebook PC (1).
 4. Notebook PC (1) ping 192.168.0.20 –t to Notebook PC (2).
 5. Notebook PC (1) ping 192.168.0.50 –t to Wireless Access Point (3).
- Start test.



8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6DB BANDWIDTH


LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	SEP. 29, 2012

TEST SETUP

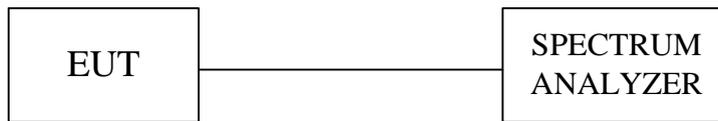

TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.



TEST RESULTS

No non-compliance noted.

IEEE 802.11b mode (One TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	12024	500	PASS
Middle	2437	12124	500	PASS
High	2462	12074	500	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode (One TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16533	500	PASS
Middle	2437	16533	500	PASS
High	2462	16533	500	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 mode (Two TX)

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2412	17434	17434	500	PASS
Middle	2437	17434	17535	500	PASS
High	2462	17234	17234	500	PASS

NOTE :

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode (Two TX)



Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2422	35470	35240	500	PASS
Middle	2437	35671	35470	500	PASS
High	2452	35671	35270	500	PASS


NOTE :

1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.





6dB BANDWIDTH (802.11b MODE)

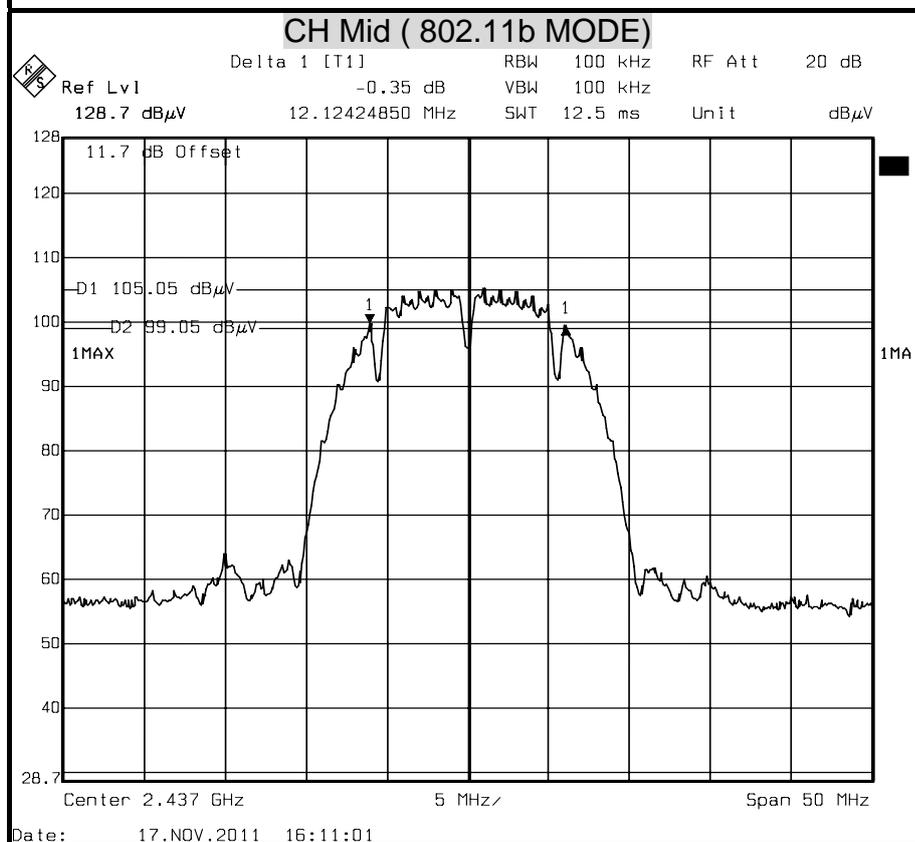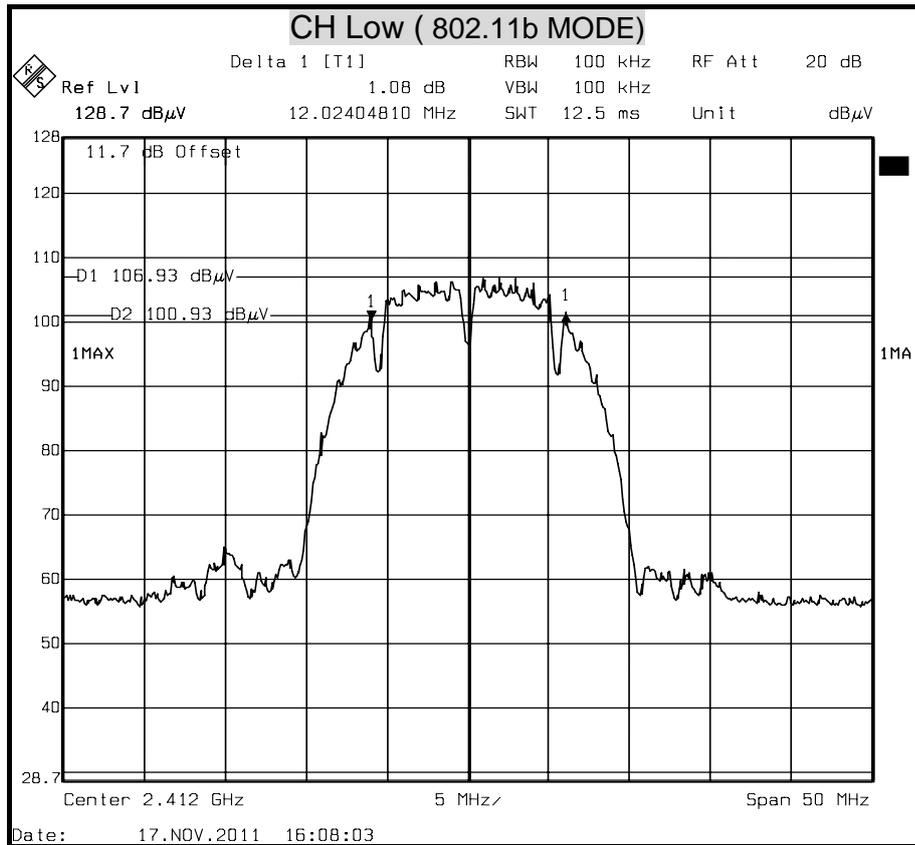


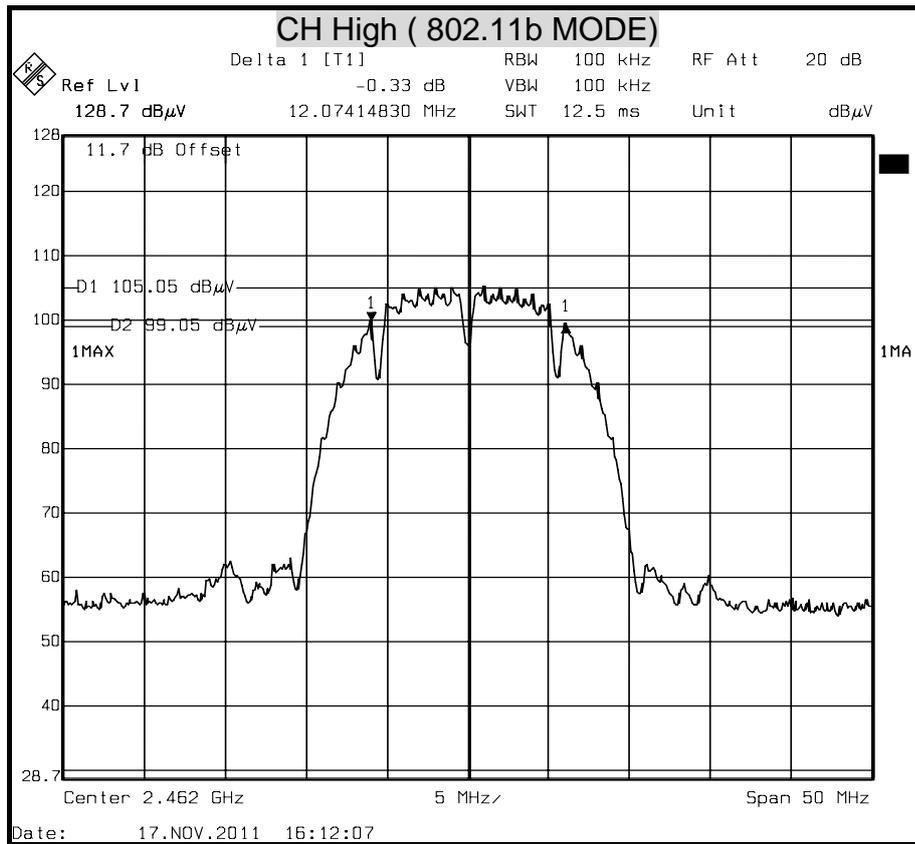





6dB BANDWIDTH (802.11g MODE)

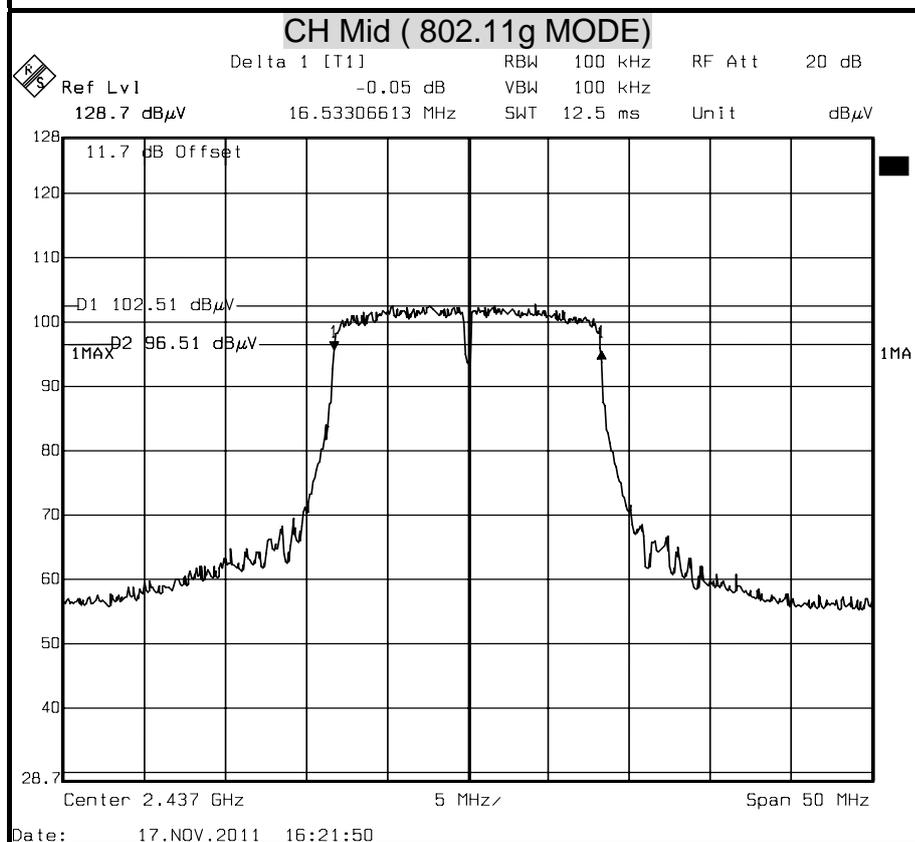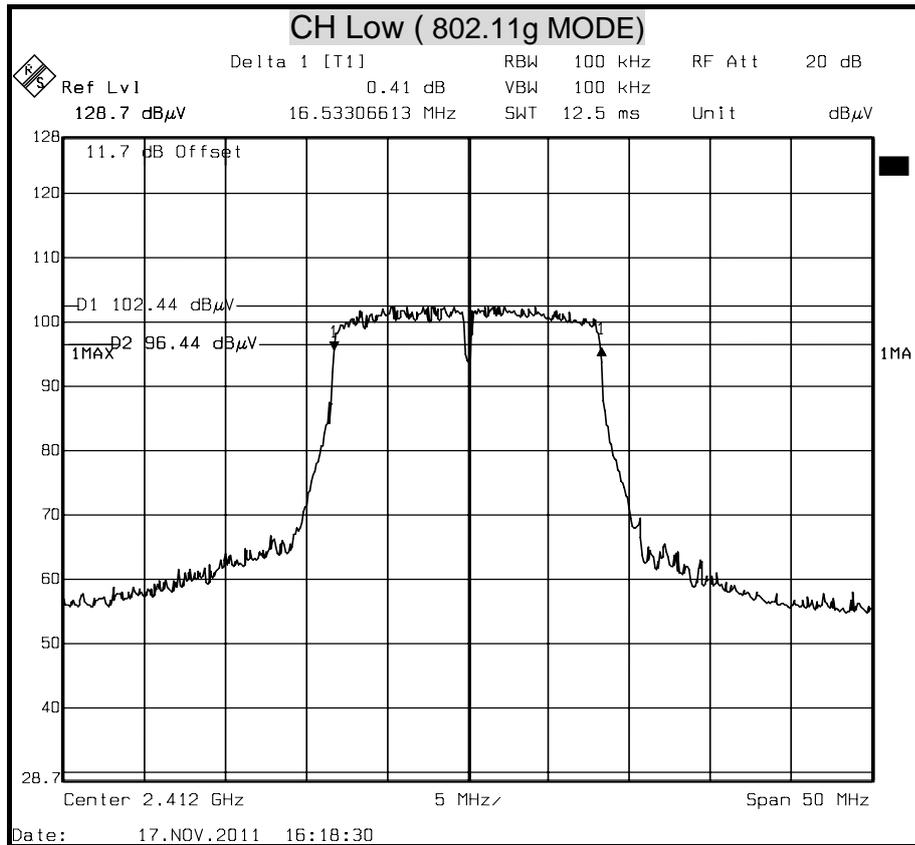


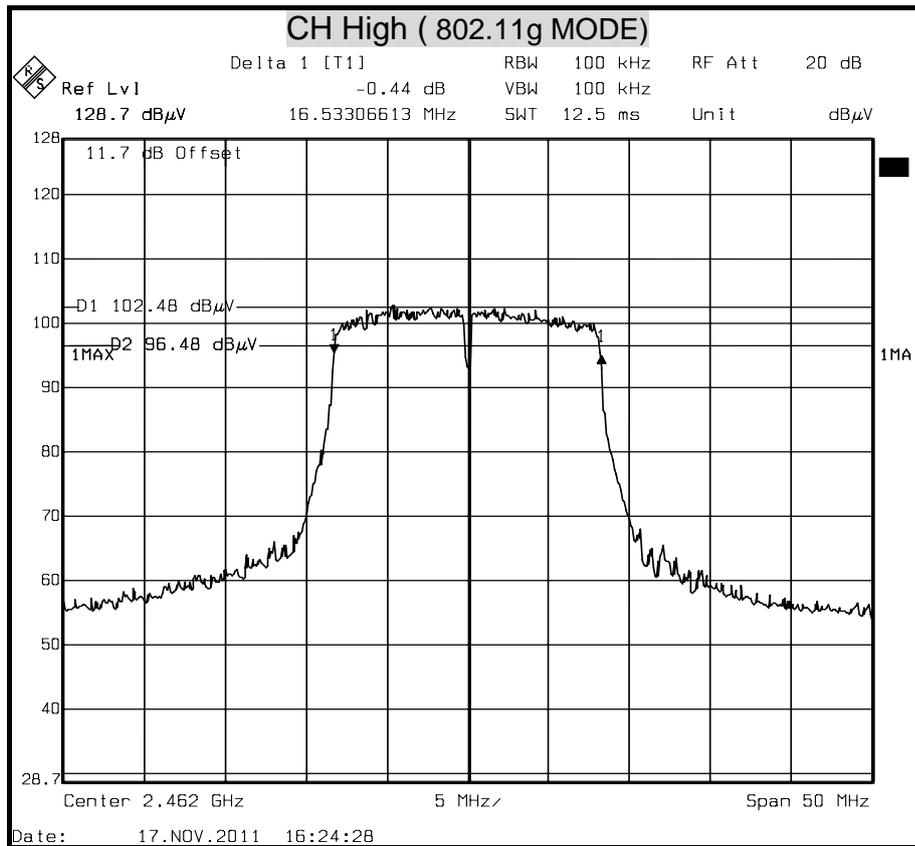





6dB BANDWIDTH (802.11n HT20 MODE) Chain 0

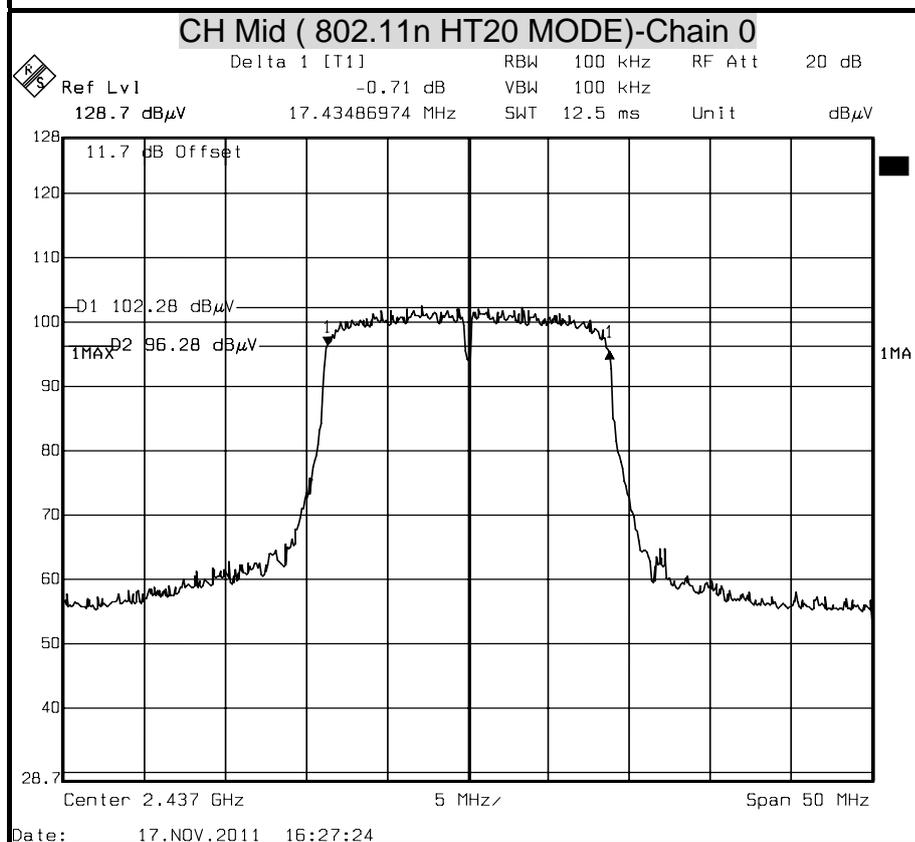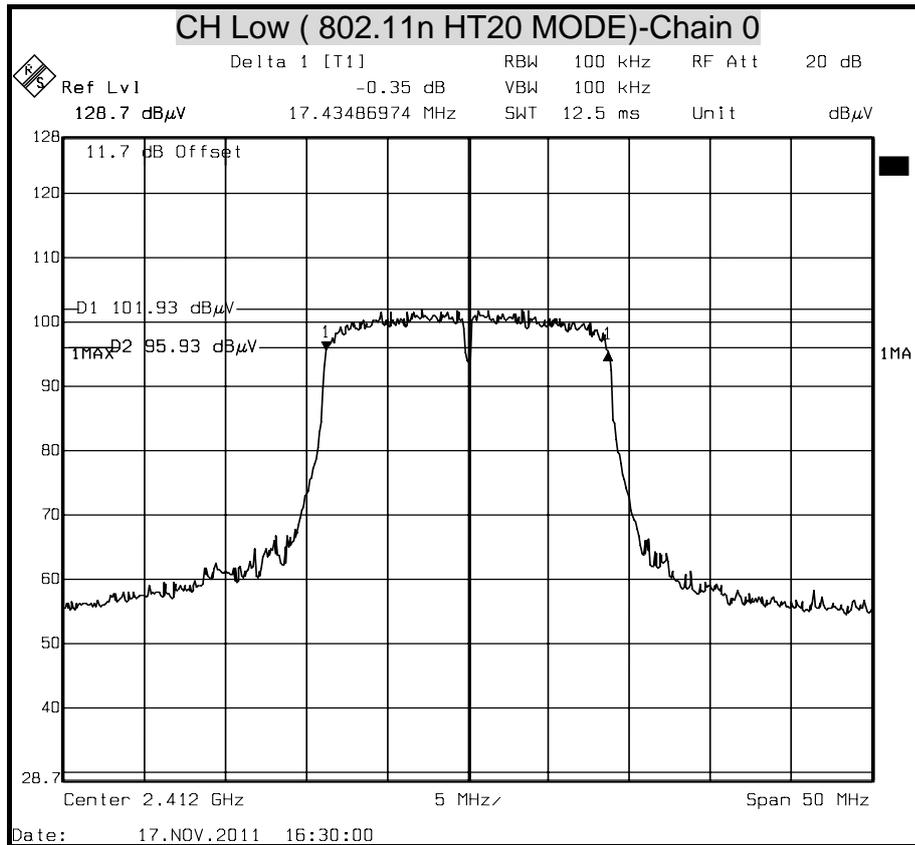


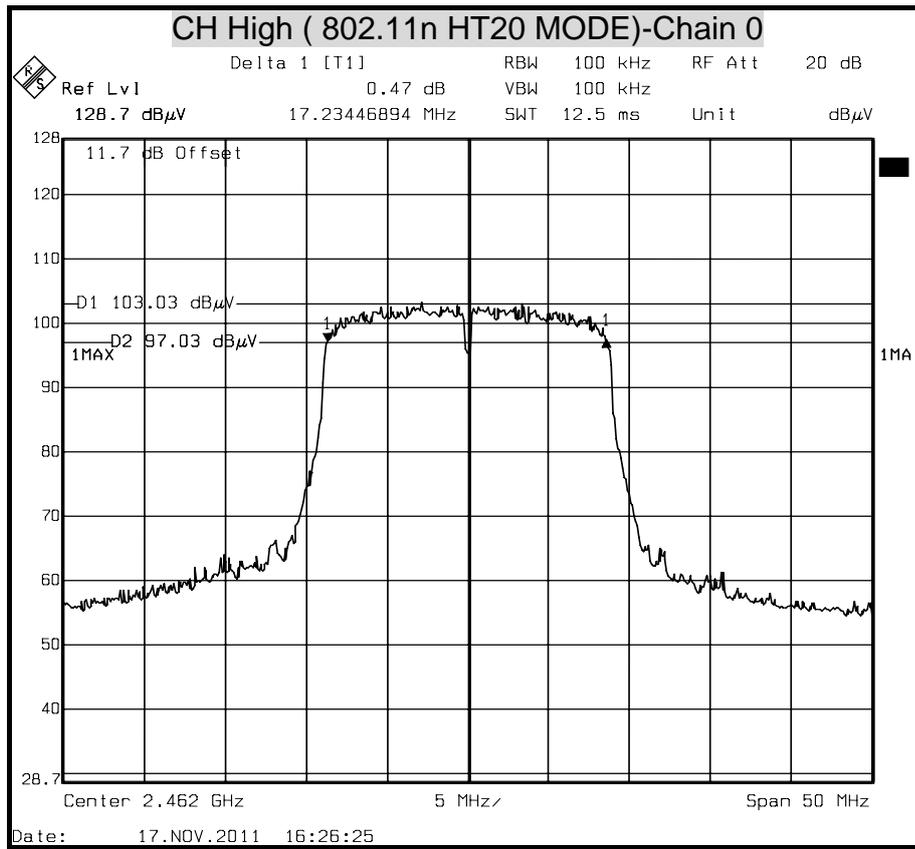





6dB BANDWIDTH (802.11n HT20 MODE) Chain 1

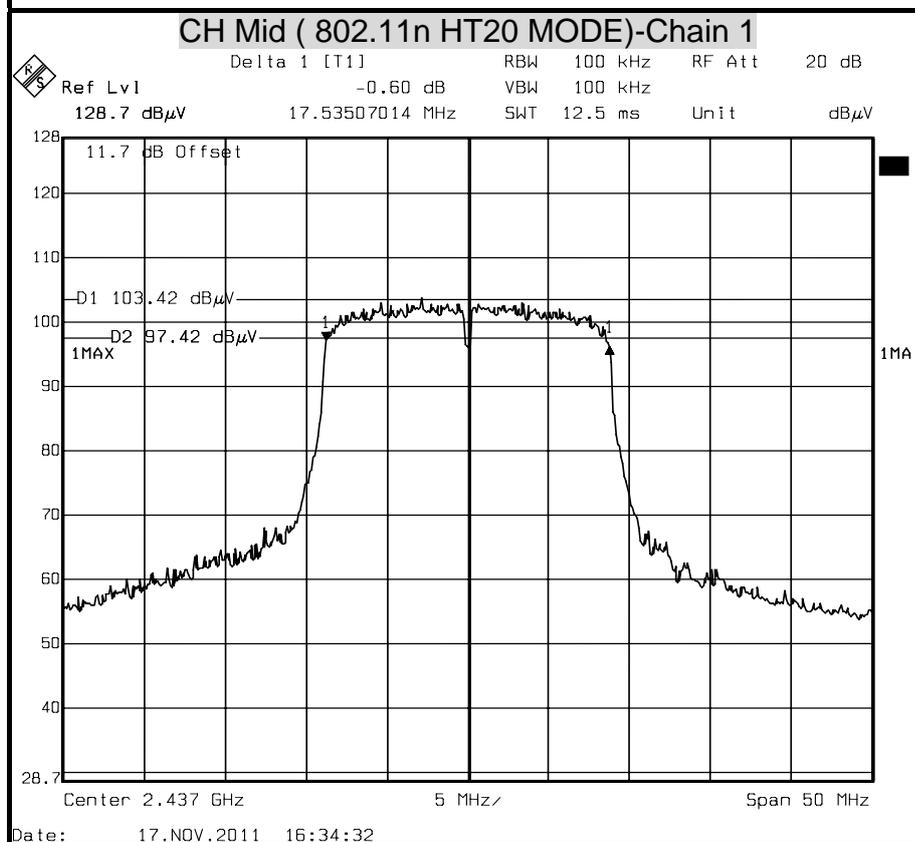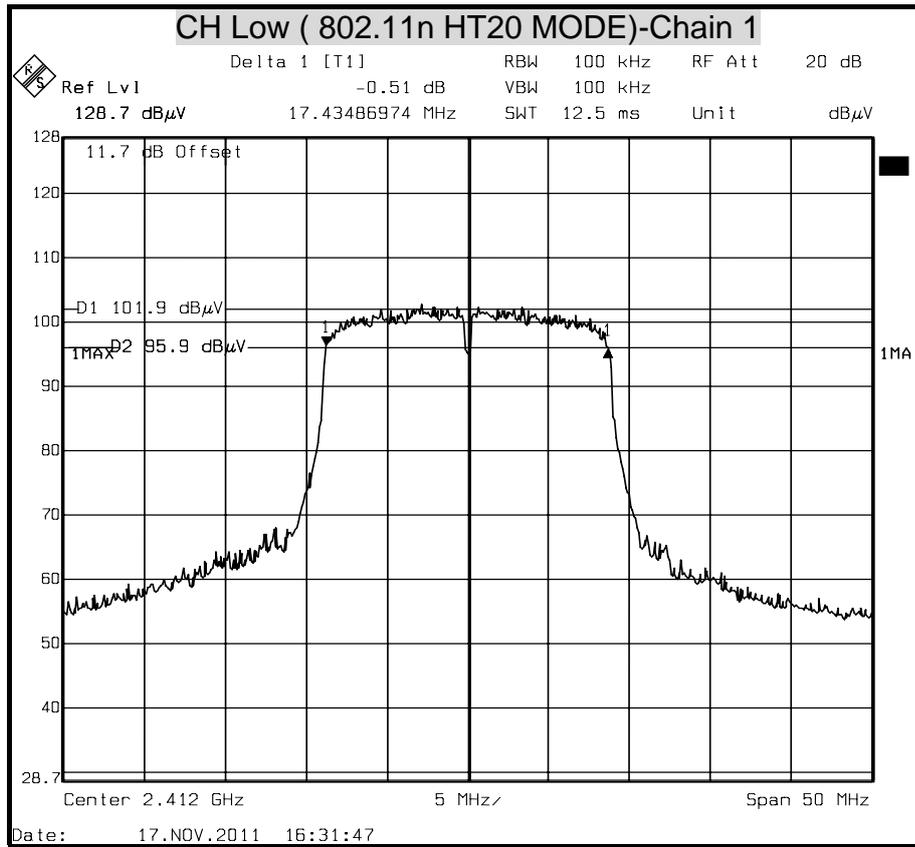


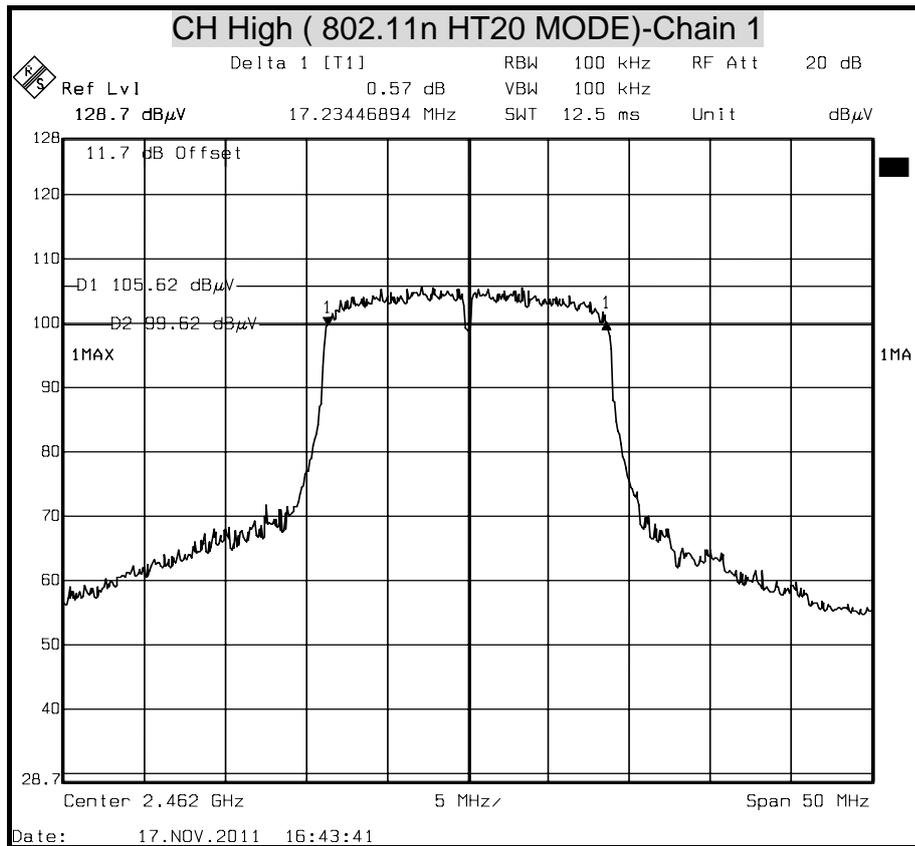





6dB BANDWIDTH (802.11n HT40 MODE) Chain 0

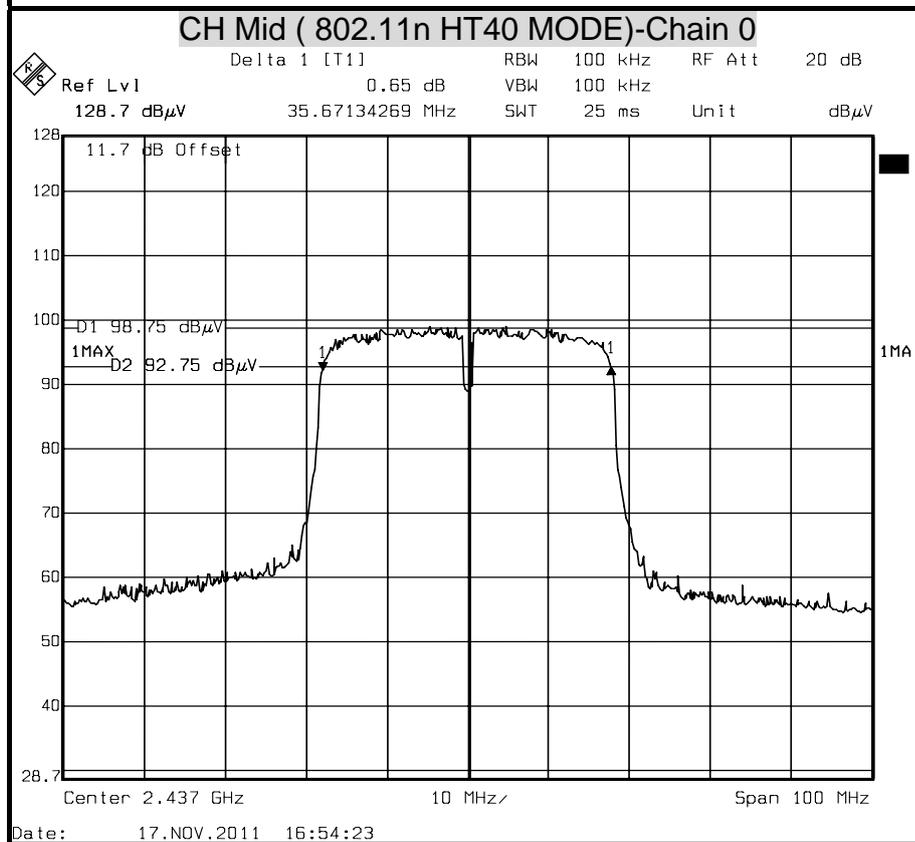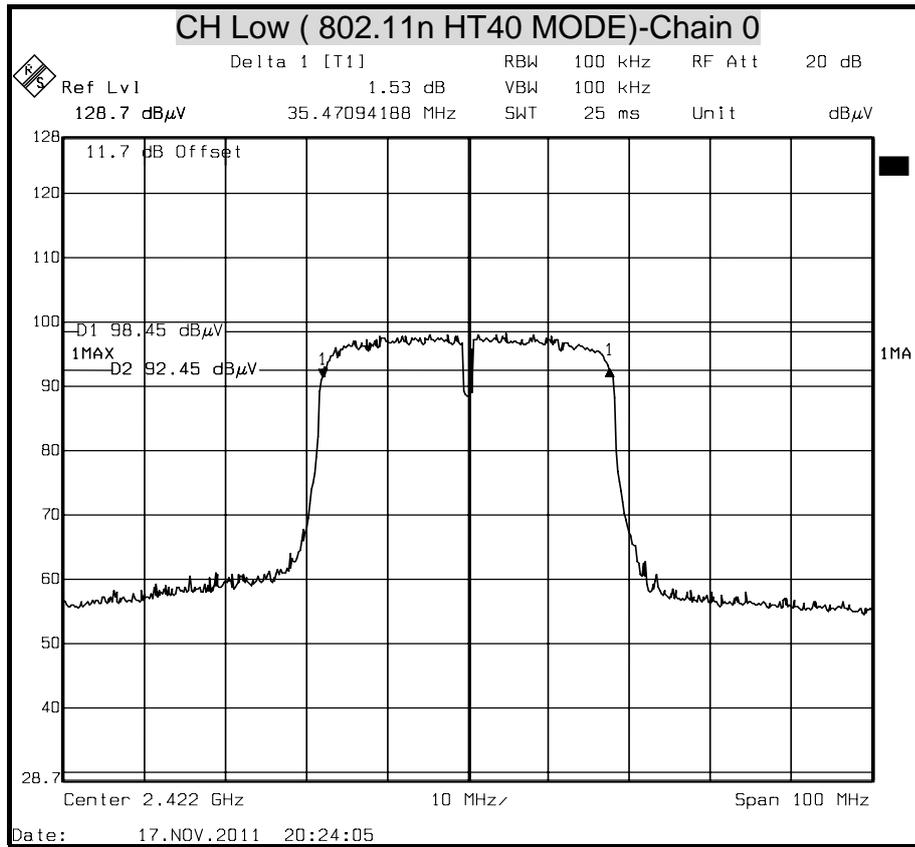


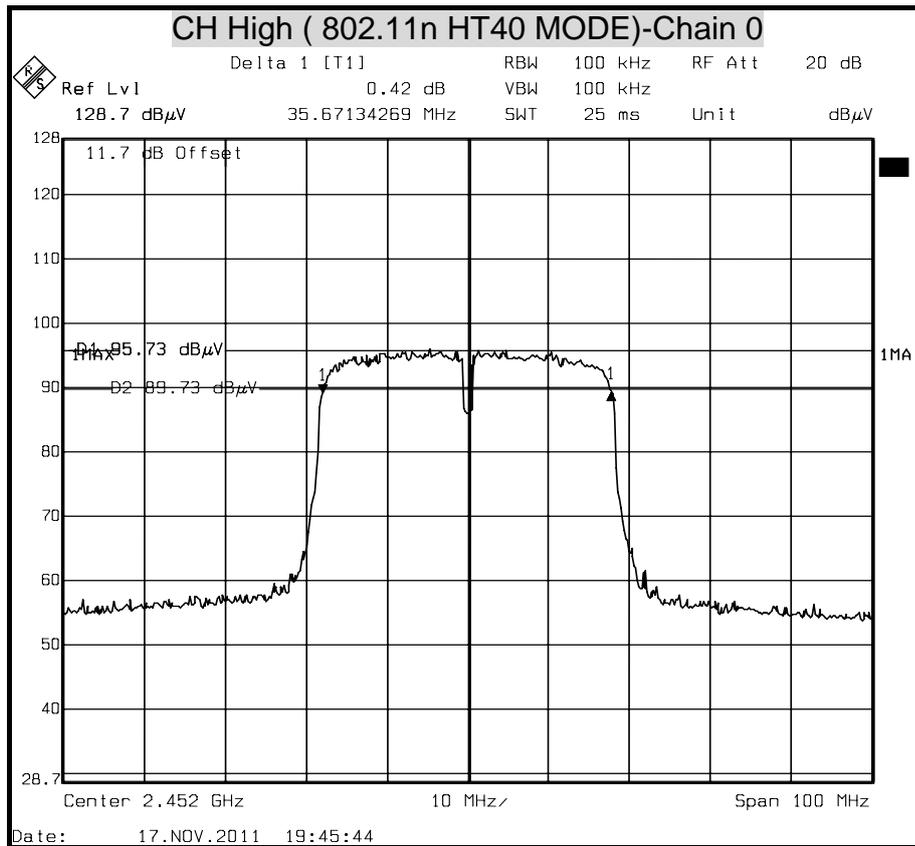



6dB BANDWIDTH (802.11n HT40 MODE) Chain 1

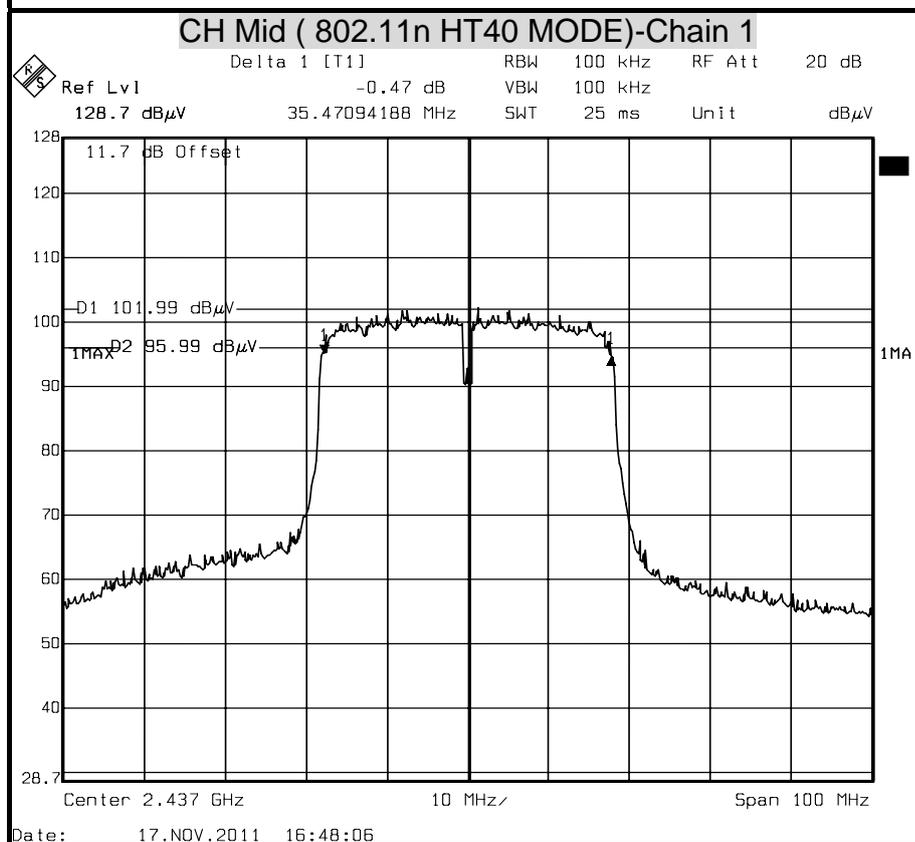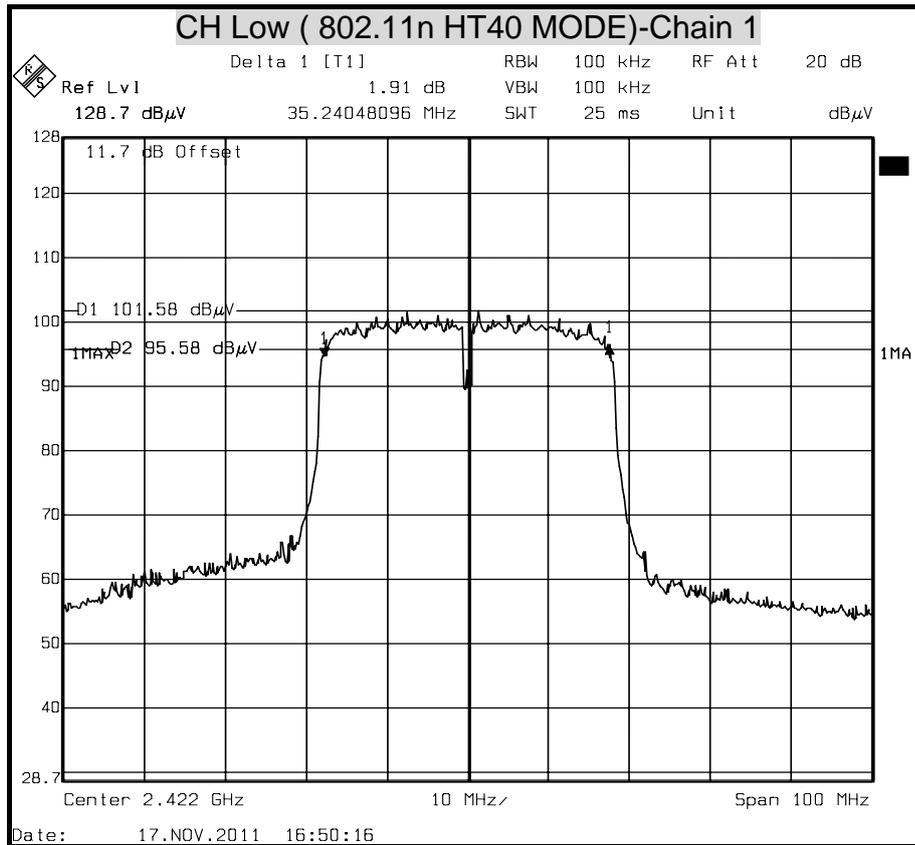

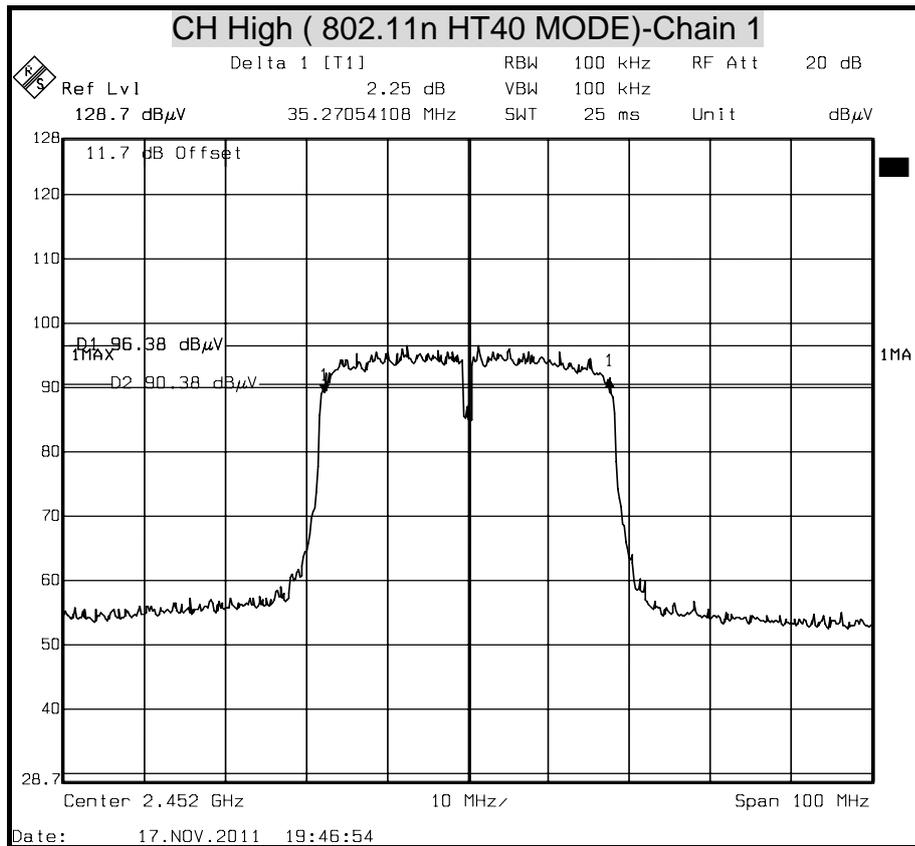



8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	SEP. 29, 2012

TEST SETUP



TEST PROCEDURE

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

Set sweep time=auto

Use detector max peak mode

Measurement of Digital Transmission Systems Operating under Section 15.247

TEST RESULTS

No non-compliance noted



IEEE 802.11b mode (One TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	13.13	30.00	PASS
Middle	2437	12.54	30.00	PASS
High	2462	12.84	30.00	PASS

- NOTE :**
1. At final test to get the worst-case emission at 1Mbps long.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode (One TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	19.02	30.00	PASS
Middle	2437	18.83	30.00	PASS
High	2462	19.82	30.00	PASS

- NOTE :**
1. At final test to get the worst-case emission at 6Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 mode(Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	18.96	20.52	22.82	30.00	PASS
Middle	2437	18.79	20.21	22.57	30.00	PASS
High	2462	19.24	21.26	23.38	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	18.15	18.74	21.47	30.00	PASS
Middle	2437	18.03	19.21	21.67	30.00	PASS
High	2452	16.56	20.18	21.75	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



Average Power Data

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	10.69
Middle	2437	10.14
High	2462	10.70

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	9.82
Middle	2437	9.71
High	2462	10.42

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Average Power (dBm)	Average Power (dBm)
		Chain 0	Chain 1
Low	2412	9.84	11.70
Middle	2437	9.60	10.88
High	2462	10.31	11.92

IEEE 802.11n HT40 mode

Channel	Channel Frequency (MHz)	Average Power (dBm)	Average Power (dBm)
		Chain 0	Chain 1
Low	2422	9.41	9.40
Middle	2437	9.31	10.43
High	2452	7.52	11.76



8.3 MAXIMUM PERMISSIBLE EXPOSURE

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

CALCULATIONS

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where $E =$ Field strength in Volts / meter

$P =$ Power in Watts

$G =$ Numeric antenna gain

$d =$ Distance in meters

$S =$ Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = d(m) / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

Where $d =$ Distance in cm

$P =$ Power in mW

$G =$ Numeric antenna gain

$S =$ Power density in mW / cm²



LIMIT

Power Density Limit, S=1.0mW/cm²

TEST RESULTS

No non-compliance noted.

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

G=0.259dBi=1.061451mW

G=3.169dBi=2.074436mW

IEEE 802.11b = 0.0796 * 20.5589 * 1.06145112 ÷ 400 = 0.00931

IEEE 802.11g = 0.0796 * 95.9401 * 1.06145112 ÷ 400 = 0.02167

IEEE 802.11n HT20 = 0.0796 * 217.6056 * 2.07443581 ÷ 400 = 0.02855

IEEE 802.11n HT40 = 0.0796 * 149.5215 * 2.07443581 ÷ 400 = 0.02712

Mode	Minimum separation distance (cm)	Output Power (dBm)	Output Power (mw)	Antenna Gain (dBi)	Power Density Limit (mW/cm ²)	Power Density at 20cm (mW/cm ²)
IEEE 802.11b	20.0	13.13	20.56	0.26	1.00	0.004091
IEEE 802.11g	20.0	19.82	95.94	0.26	1.00	0.019092
IEEE 802.11n HT20	20.0	23.38	217.61	3.17	1.00	0.043304
IEEE 802.11n HT40	20.0	21.75	149.52	3.17	1.00	0.029755

REMARK: For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.



8.4 POWER SPECTRAL DENSITY


LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	SEP. 29, 2012

TEST SETUP

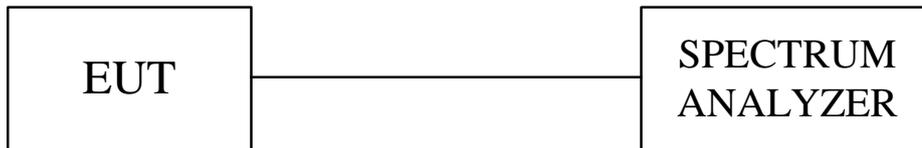

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=3KHz and VBW RBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

TEST RESULTS

Total peak power calculation formula:
 $10 \log (10^{\text{Chain 0 PPSD}} / 10)$.

No non-compliance noted.



IEEE 802.11b mode

Channel	Channel Frequency (MHz)	PPSD Chain 0 (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-20.84	8	PASS
Middle	2437	-21.18	8	PASS
High	2462	-21.32	8	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	PPSD Chain 0 (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-20.30	8	PASS
Middle	2437	-20.16	8	PASS
High	2462	-17.16	8	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	PPSD(dBm)			Maximum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	2412	-19.35	-18.41	-15.84	8	PASS
Middle	2437	-19.82	-18.34	-16.01	8	PASS
High	2462	-18.51	-17.11	-14.74	8	PASS

NOTE : 1. At final test to get the worst-case emission at 13Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	PPSD(dBm)			Maximum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	2422	-22.61	-19.19	-17.56	8	PASS
Middle	2437	-22.90	-19.67	-17.98	8	PASS
High	2452	-23.14	-24.51	-20.76	8	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.





POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

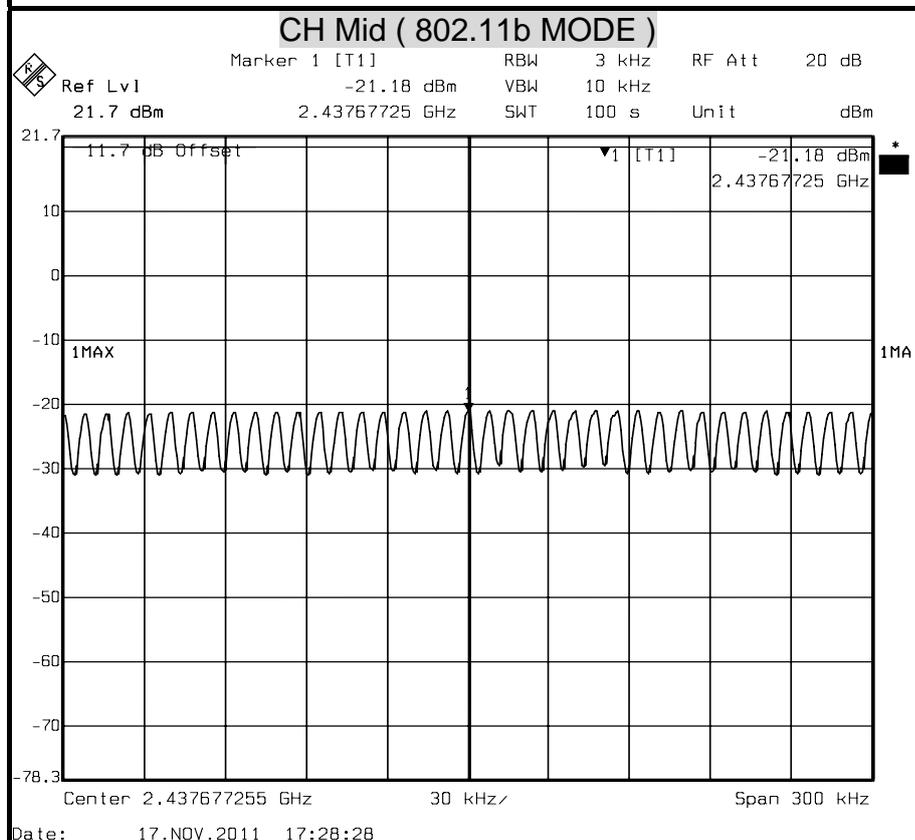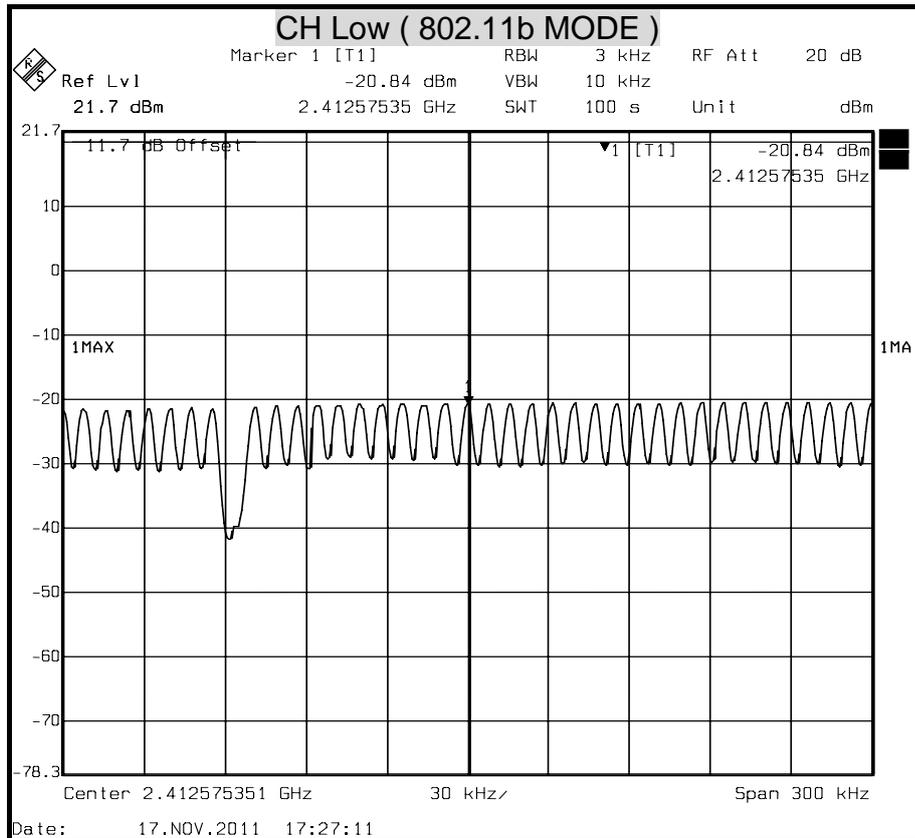


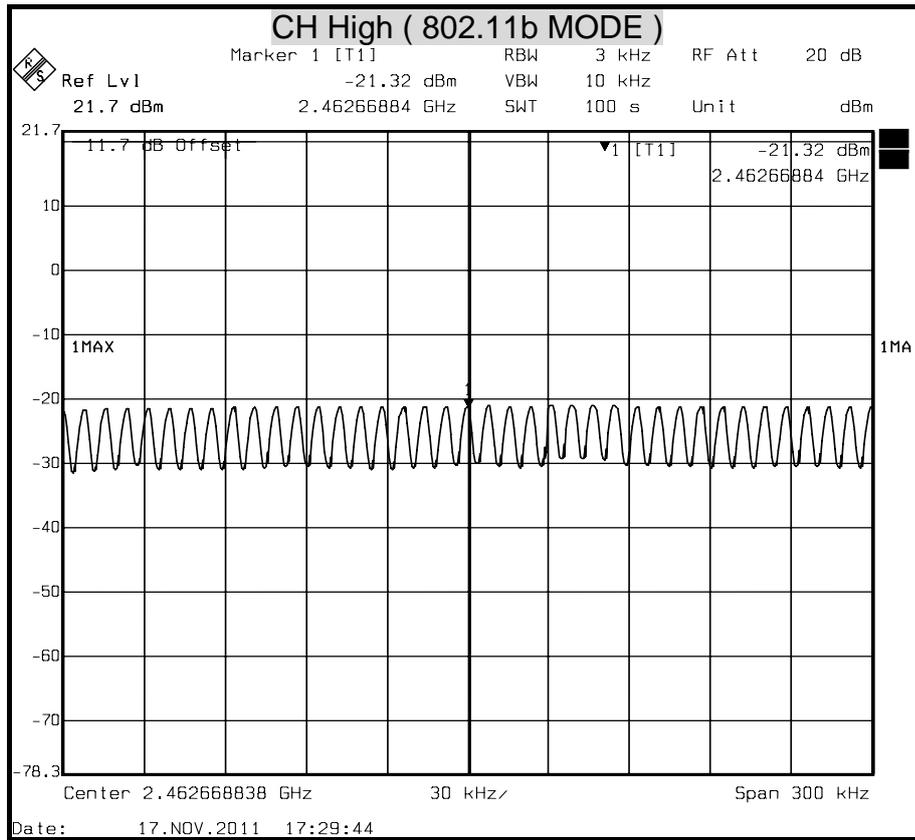





POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

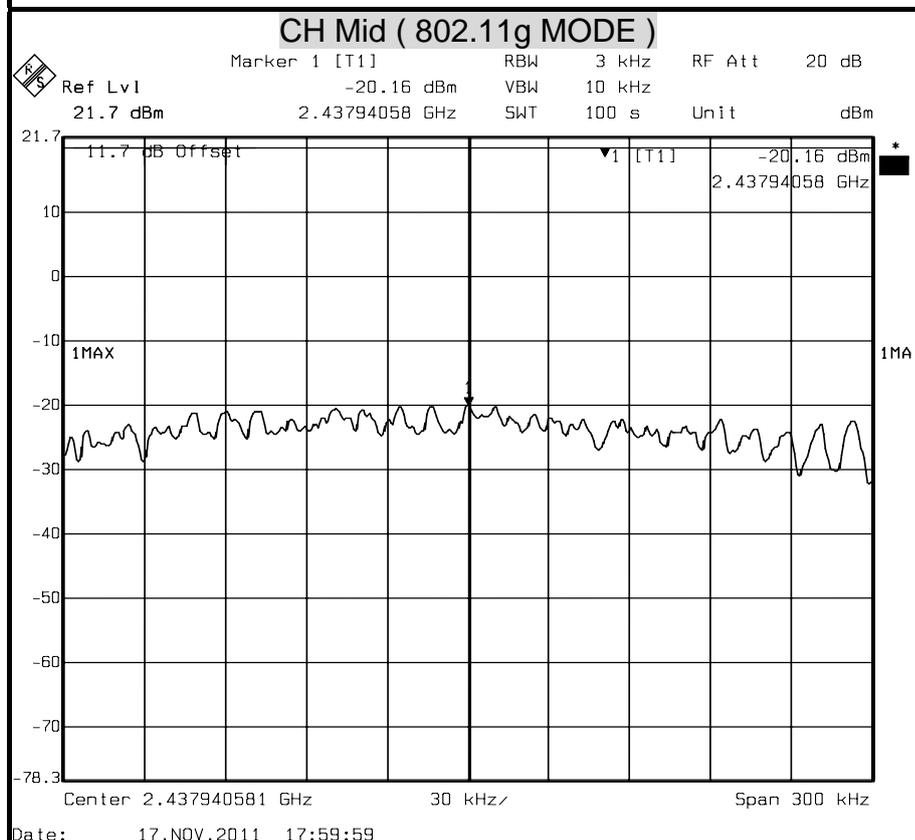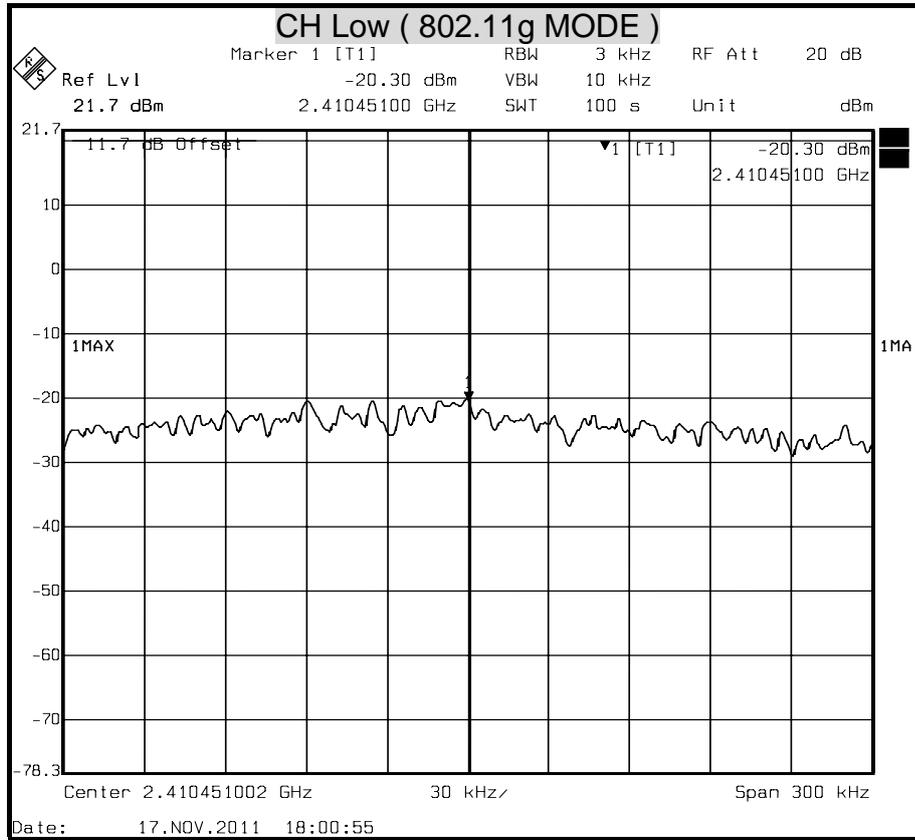


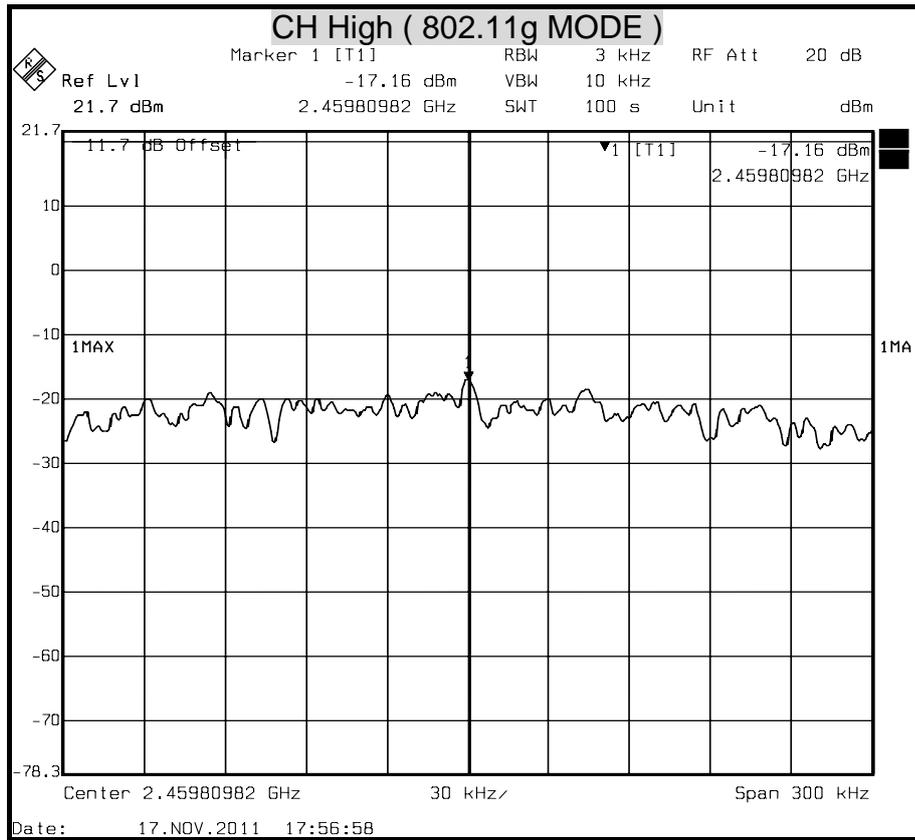





POWER SPECTRAL DENSITY (802.11n HT20 MODE)

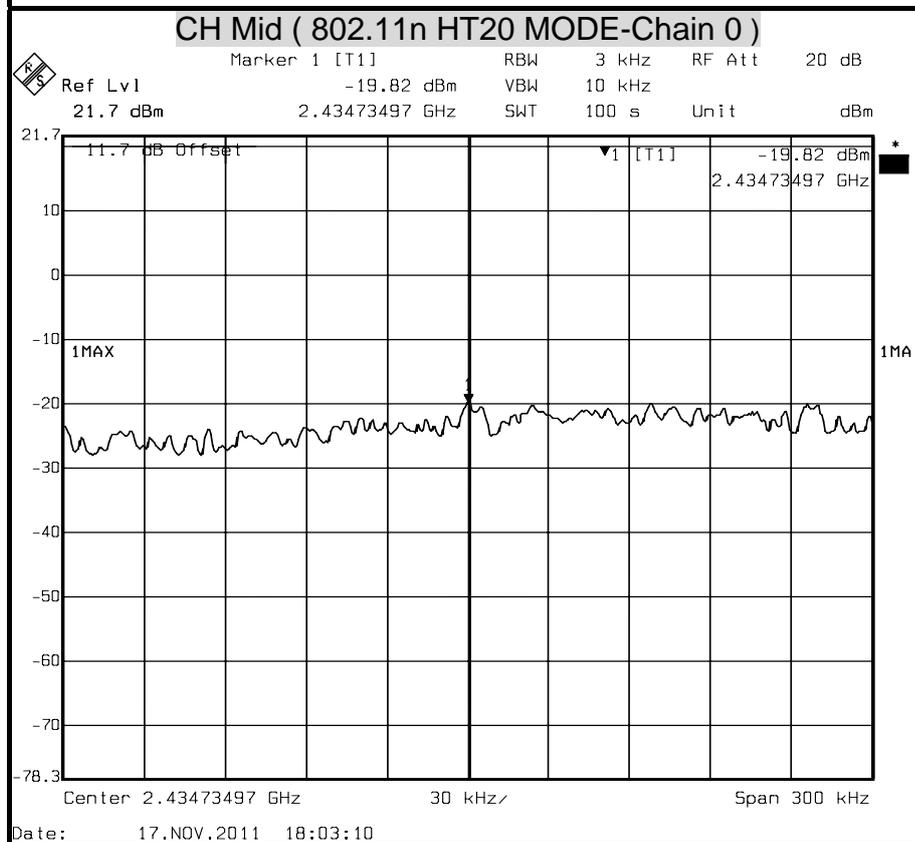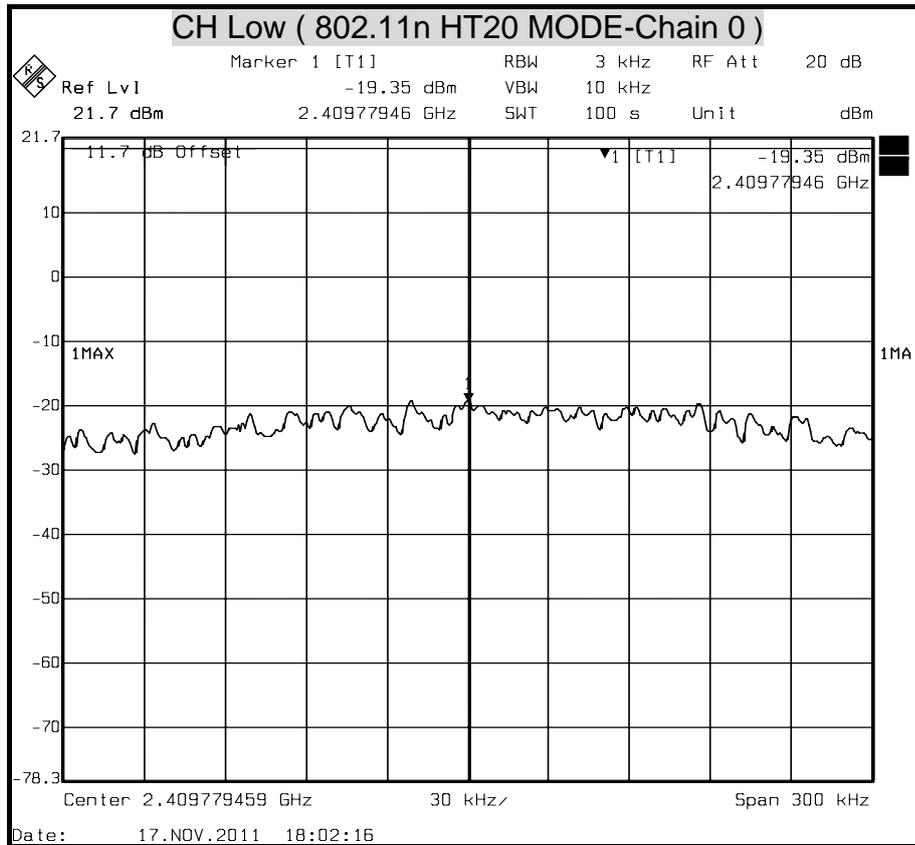


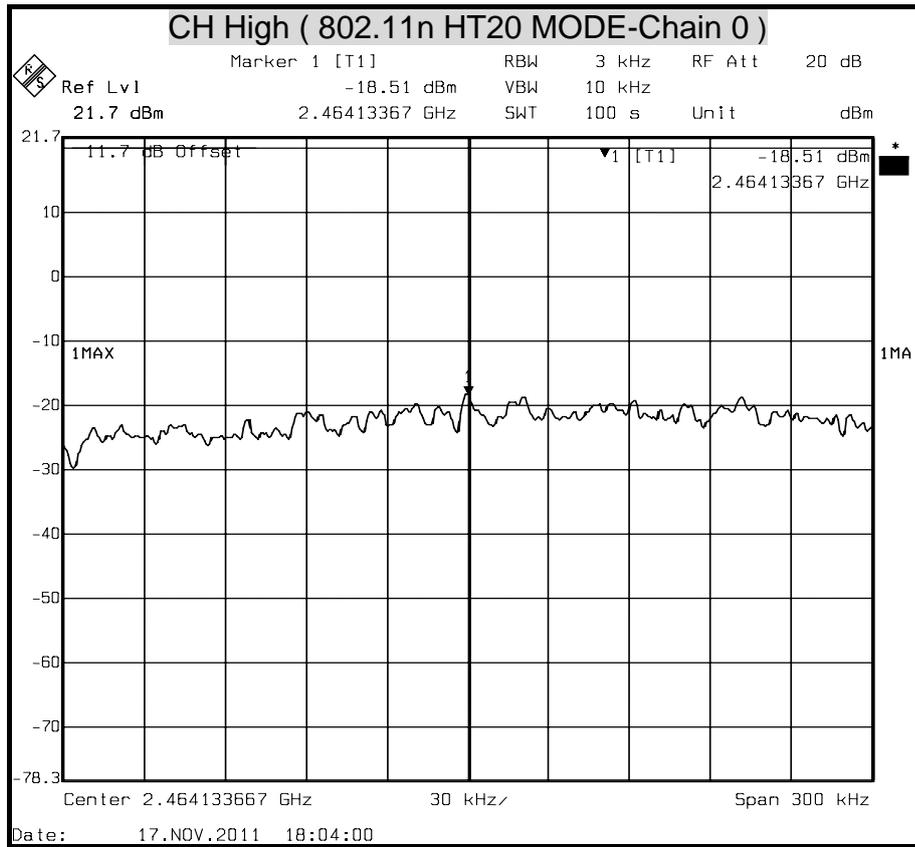





POWER SPECTRAL DENSITY (802.11n HT20 MODE)

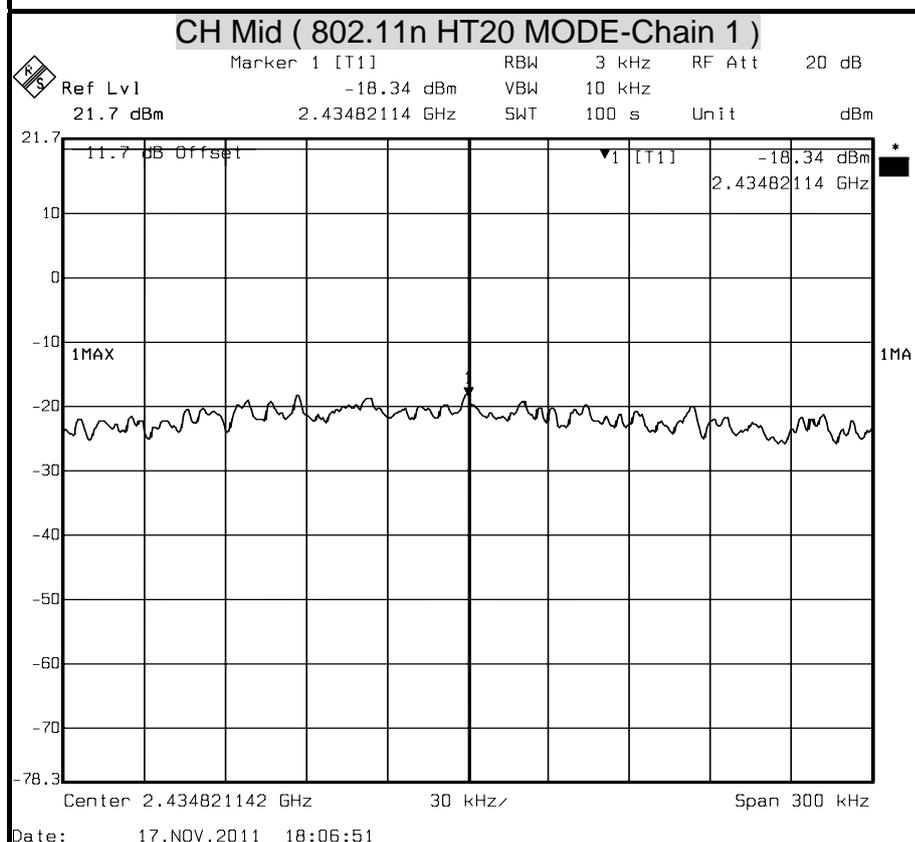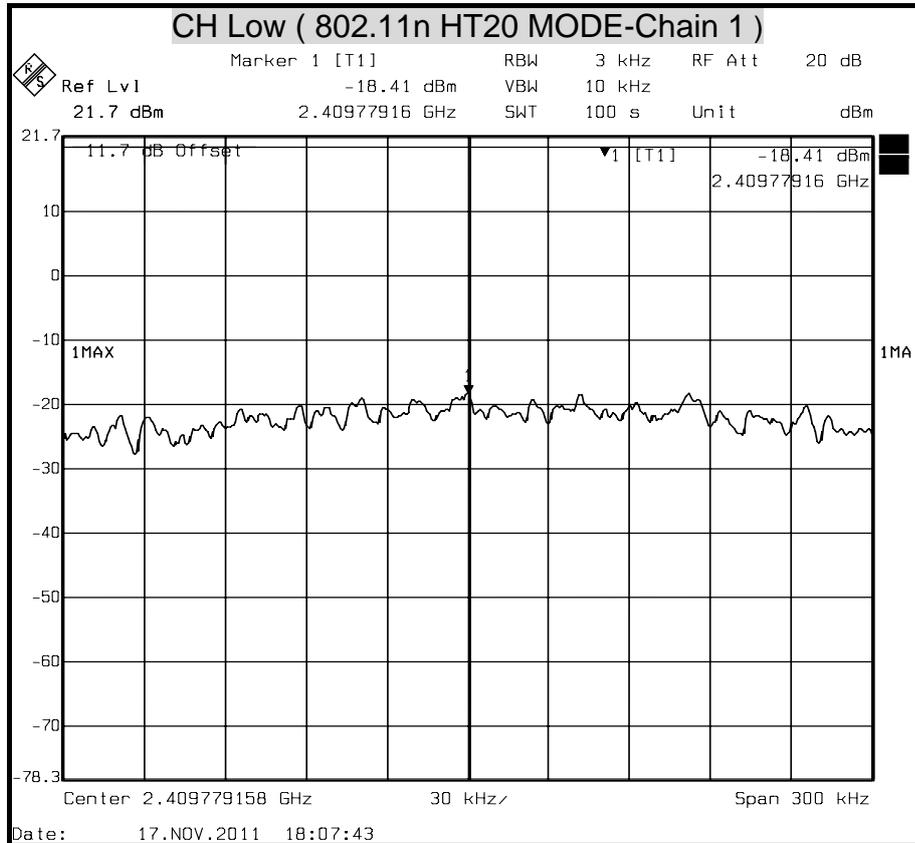


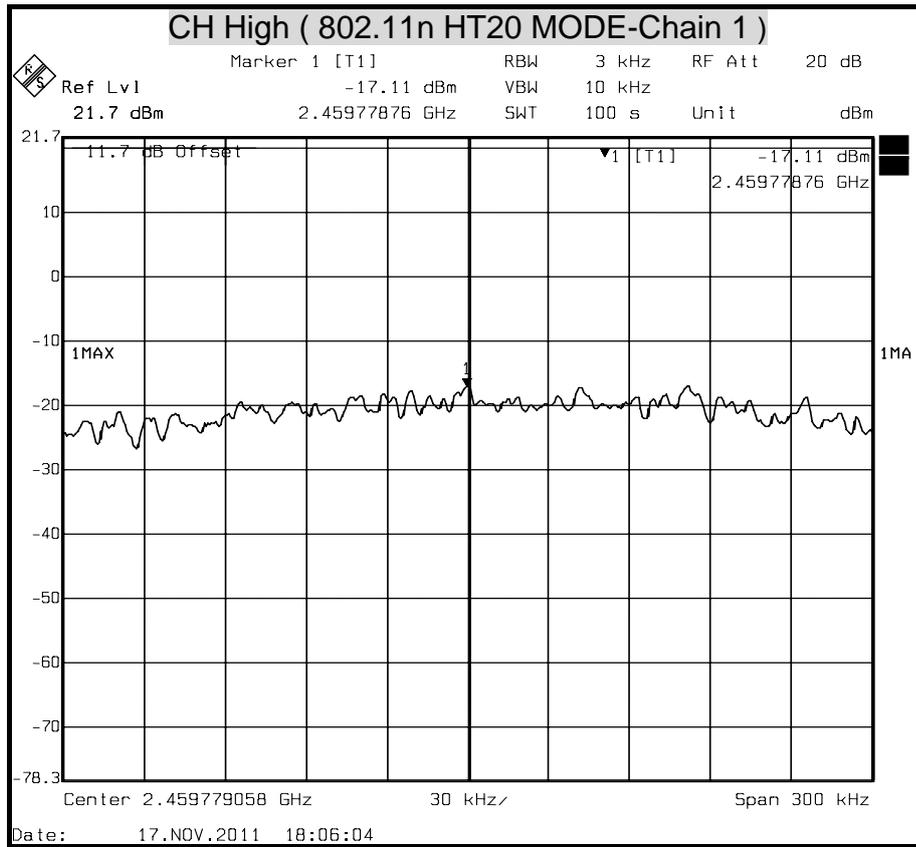





POWER SPECTRAL DENSITY (802.11n HT40 MODE)

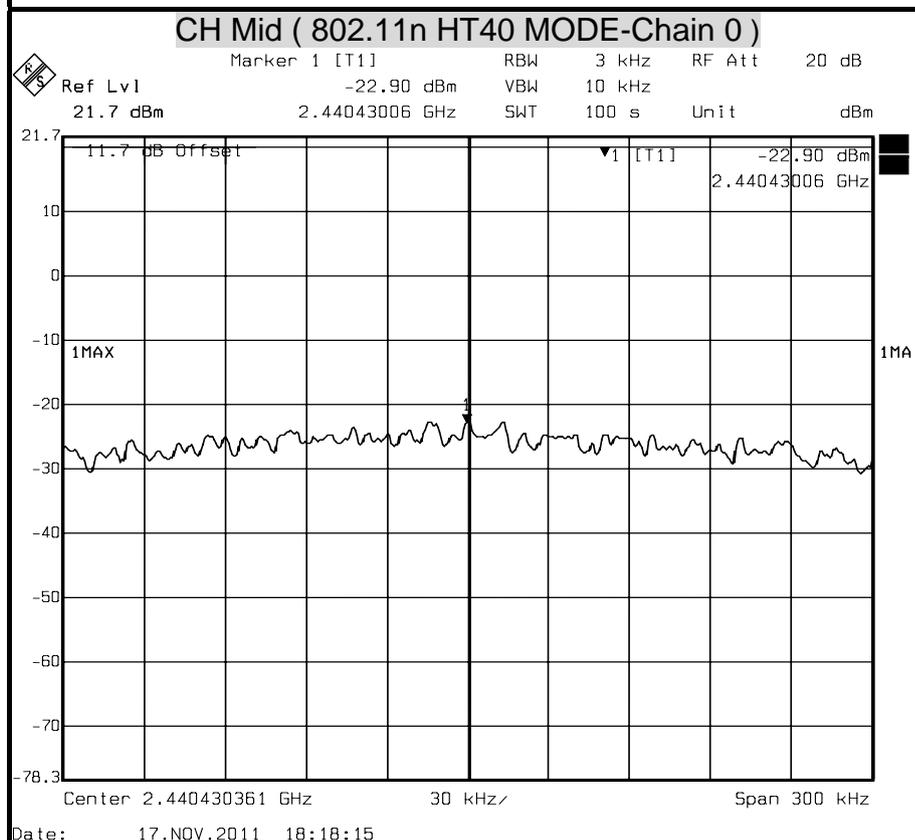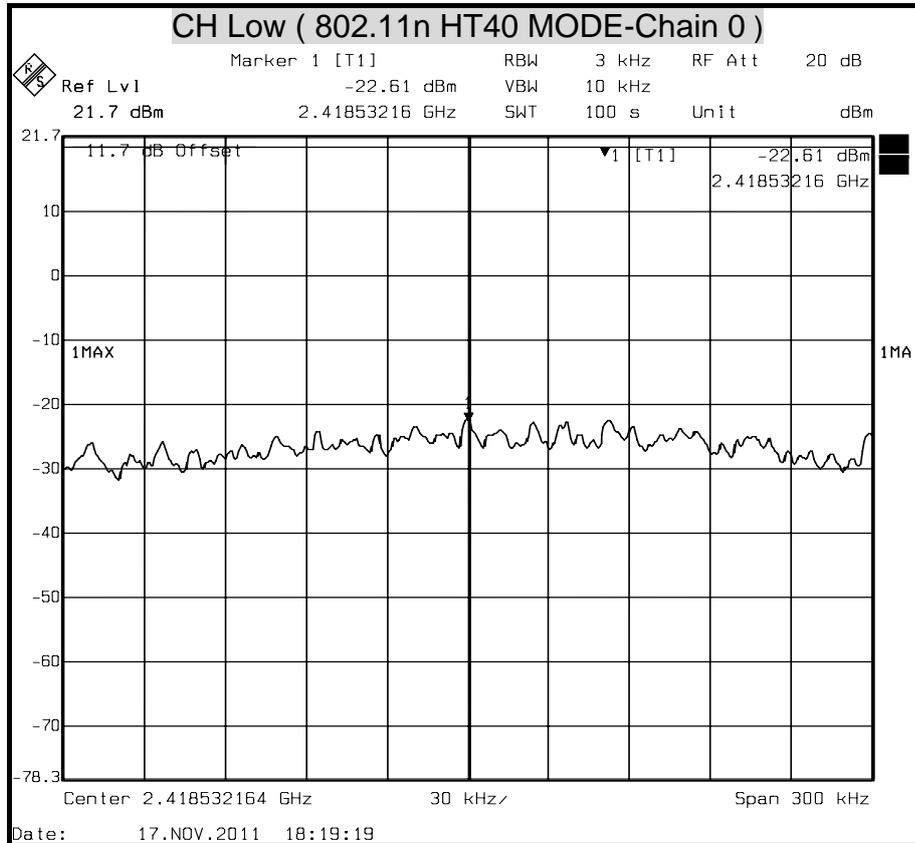


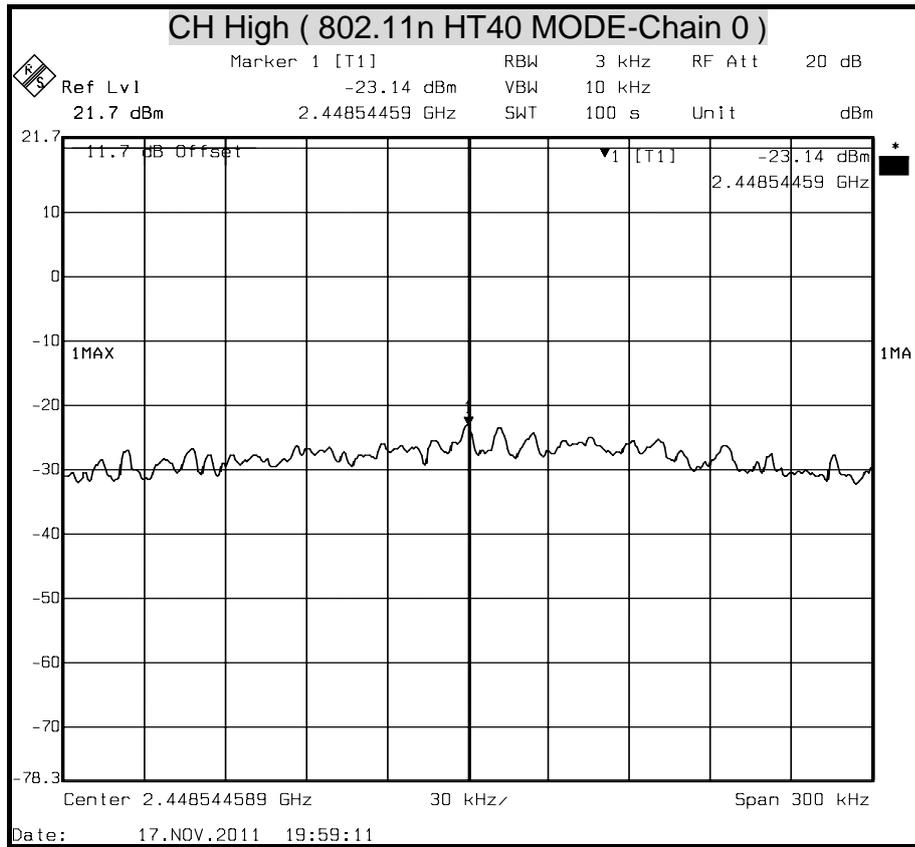



POWER SPECTRAL DENSITY (802.11n HT40 MODE)

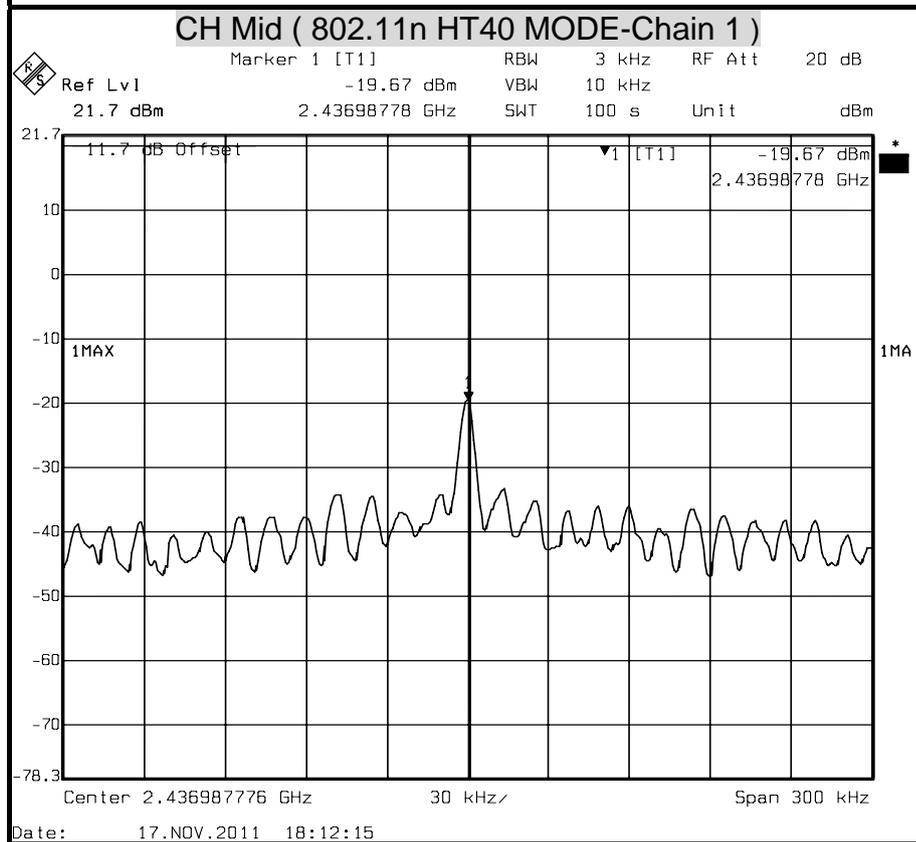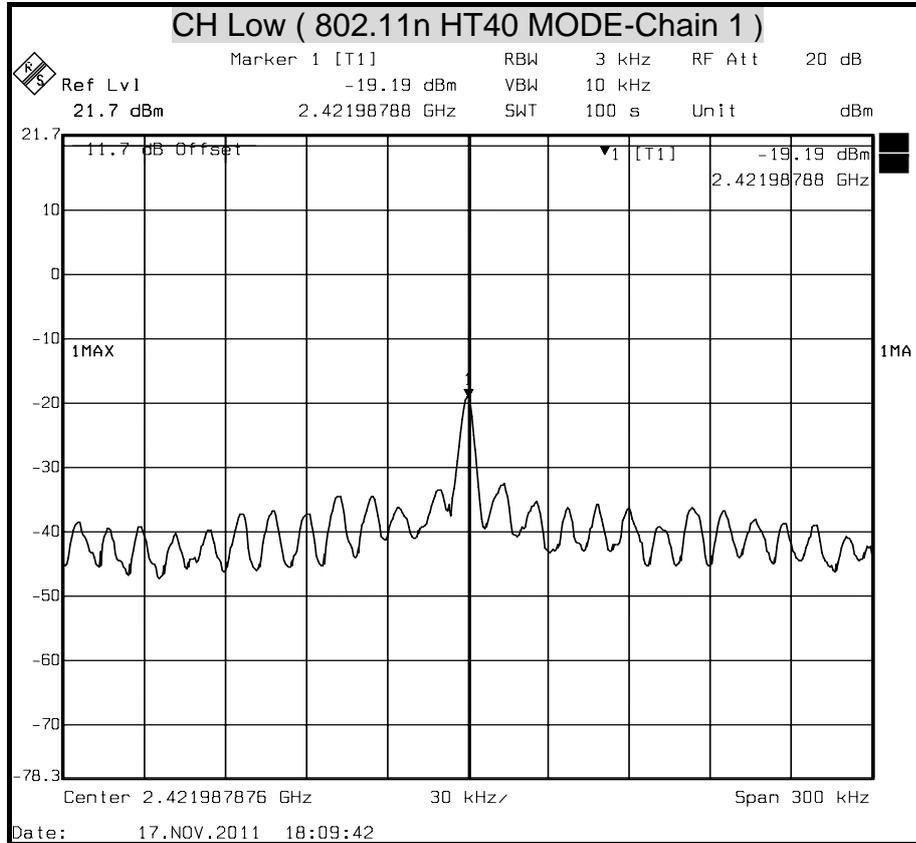

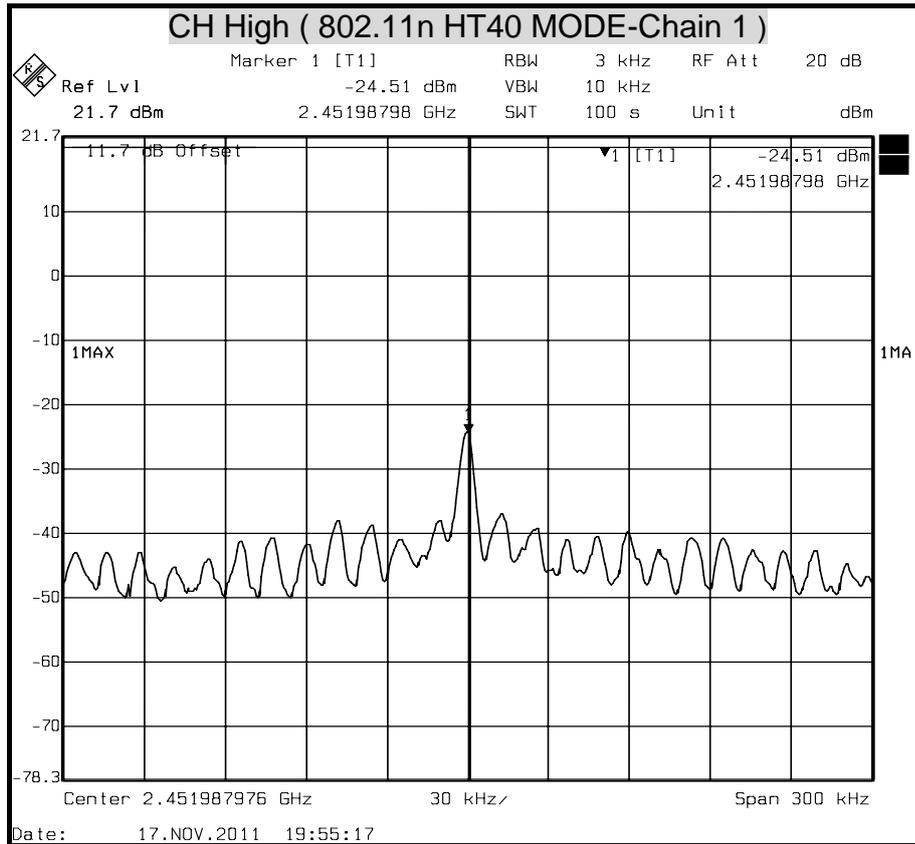



8.5 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

TEST SETUP



TEST RESULTS

No non-compliance noted.



802.11b Mode

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2412	11.7	91.37	103.07	N/A	N/A
2400	11.7	47.53	59.23	83.07	-23.84
6908.81764	11.7	44.22	55.92	83.07	-27.15

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2437	11.7	91.07	102.77	N/A	N/A
2400	11.7	44.89	56.59	82.77	-26.18
6955.91182	11.7	44.79	56.49	82.77	-26.28

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2462	11.7	92.07	103.77	N/A	N/A
2400	11.7	43.31	55.01	83.77	-28.76
6955.91182	11.7	47.81	59.51	83.77	-24.26

802.11g Mode

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2412	11.7	89.04	100.74	N/A	N/A
2400	11.7	51.95	63.65	80.74	-17.09
6720.44088	11.7	44.13	55.83	80.74	-24.91

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2437	11.7	89.41	101.11	N/A	N/A
2400	11.7	44.70	56.4	81.11	-24.71
6673.34669	11.7	44.92	56.62	81.11	-24.49

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2462	11.7	90.36	102.06	N/A	N/A
2400	11.7	44.78	56.48	82.06	-25.58
6955.91182	11.7	44.47	56.17	82.06	-25.89



802.11n HT20 Mode Chain 0

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2412	11.7	89.40	101.1	N/A	N/A
2400	11.7	50.43	62.13	81.10	-18.97
6955.91182	11.7	44.97	56.67	81.10	-24.43

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2437	11.7	88.95	100.65	N/A	N/A
2400	11.7	44.25	55.95	80.65	-24.70
6955.91182	11.7	44.86	56.56	80.65	-24.09

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2462	11.7	89.27	100.97	N/A	N/A
2400	11.7	643.12	654.82	80.97	573.85
6955.91182	11.7	44.92	56.62	80.97	-24.35

802.11n HT20 Mode Chain 1

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2412	11.7	88.75	100.45	N/A	N/A
2400	11.7	51.43	63.13	80.45	-17.32
6955.91182	11.7	45.45	57.15	80.45	-23.30

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2437	11.7	89.98	101.68	N/A	N/A
2400	11.7	45.43	57.13	81.68	-24.55
6720.44088	11.7	44.41	56.11	81.68	-25.57

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2462	11.7	91.09	102.79	N/A	N/A
2400	11.7	46.37	58.07	82.79	-24.72
6955.91182	11.7	45.41	57.11	82.79	-25.68



802.11n HT40 Mode Chain 0

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2422	11.7	84.56	96.26	N/A	N/A
2400	11.7	47.80	59.5	76.26	-16.76
6861.72345	11.7	44.47	56.17	76.26	-20.09

CH Mid

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2437	11.7	85.27	96.97	N/A	N/A
2400	11.7	45.52	57.22	76.97	-19.75
6955.91182	11.7	45.01	56.71	76.97	-20.26

CH High

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2452	11.7	84.05	95.75	N/A	N/A
2400	11.7	43.10	54.8	75.75	-20.95
6955.91182	11.7	44.98	56.68	75.75	-19.07

802.11n HT40 Mode Chain 1

CH Low

Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2422	11.7	87.61	99.31	N/A	N/A
2400	11.7	52.88	64.58	79.31	-14.73
6861.72345	11.7	44.70	56.4	79.31	-22.91

CH Mid



Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2437	11.7	87.49	99.19	N/A	N/A
2400	11.7	50.42	62.12	79.19	-17.07
6626.25251	11.7	44.73	56.43	79.19	-22.76



CH High



Frequency	Offset	Reading	Level	Limit	Margin
(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
2452	11.7	86.06	97.76	N/A	N/A
2400	11.7	45.88	57.58	77.76	-20.18
6861.72345	11.7	45.80	57.5	77.76	-20.26



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT
(IEEE 802.11b MODE)

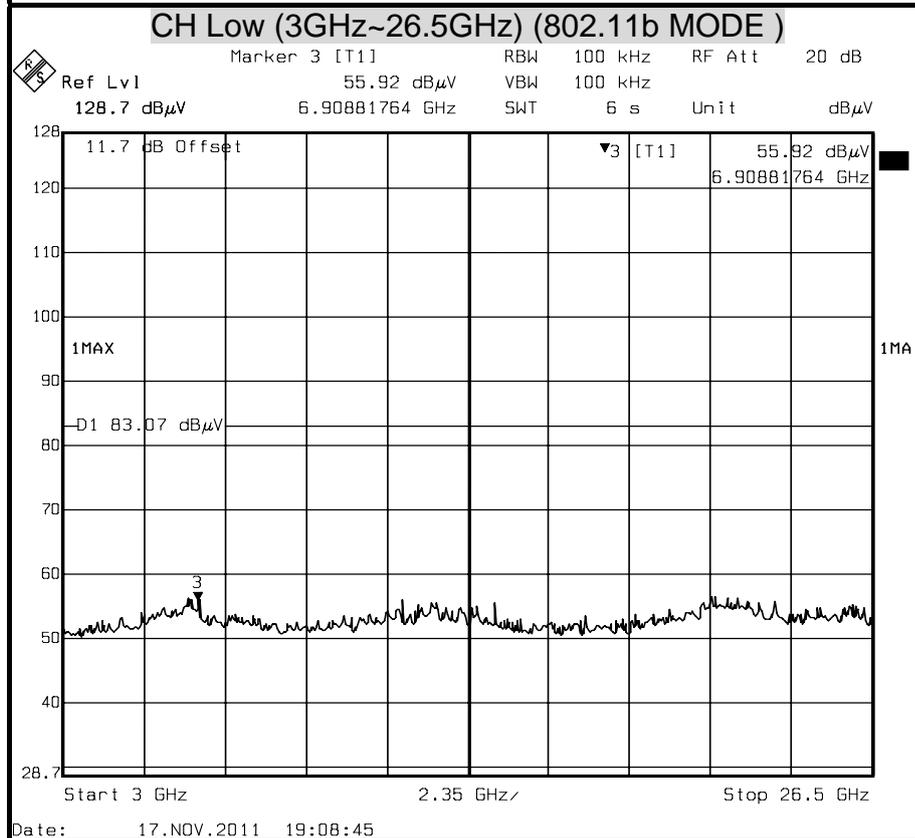
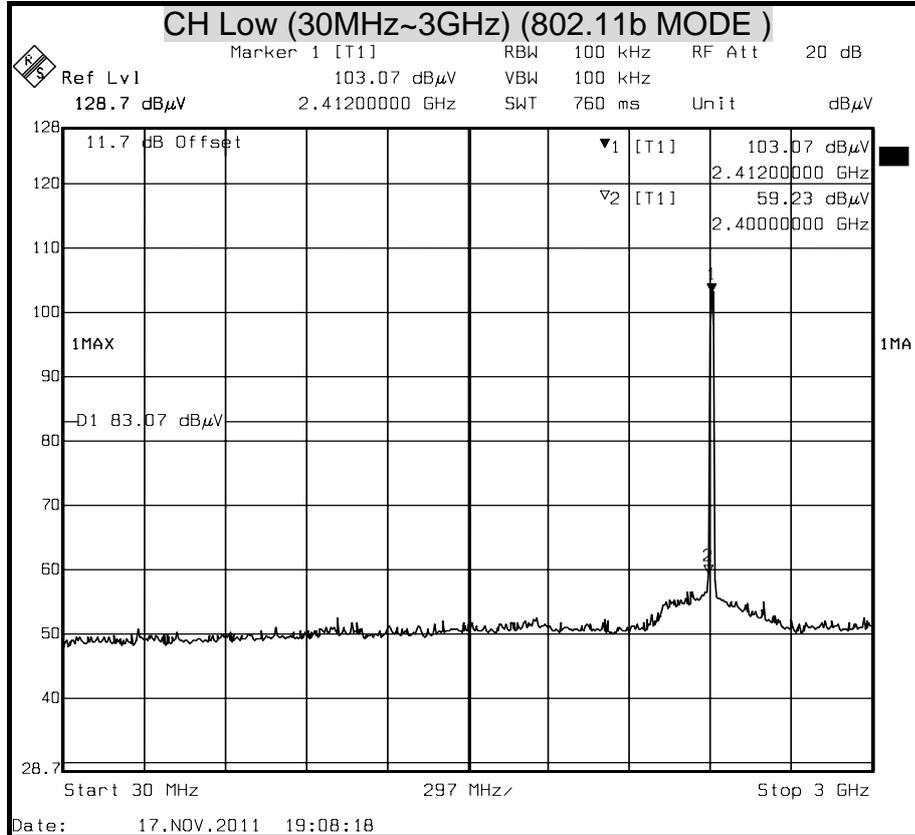


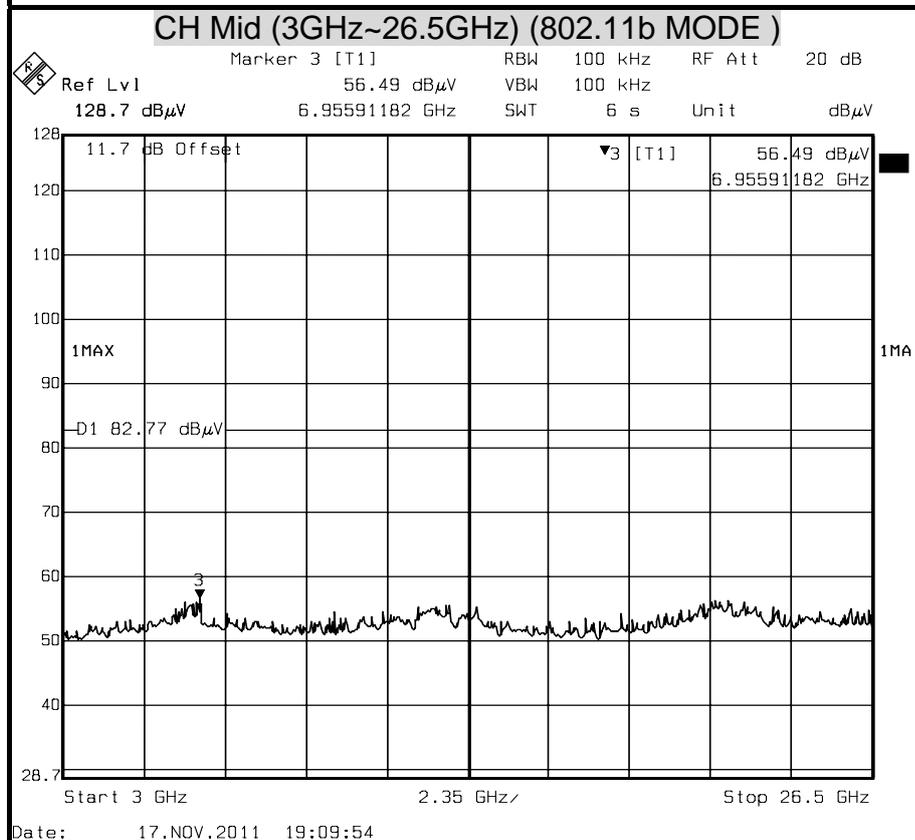
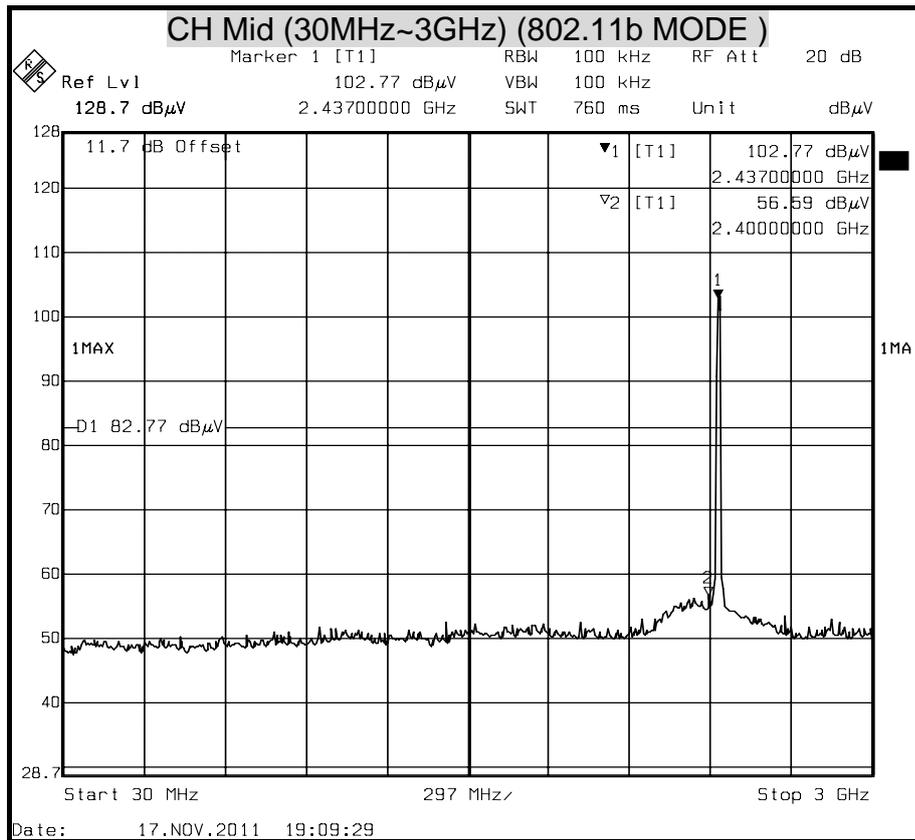


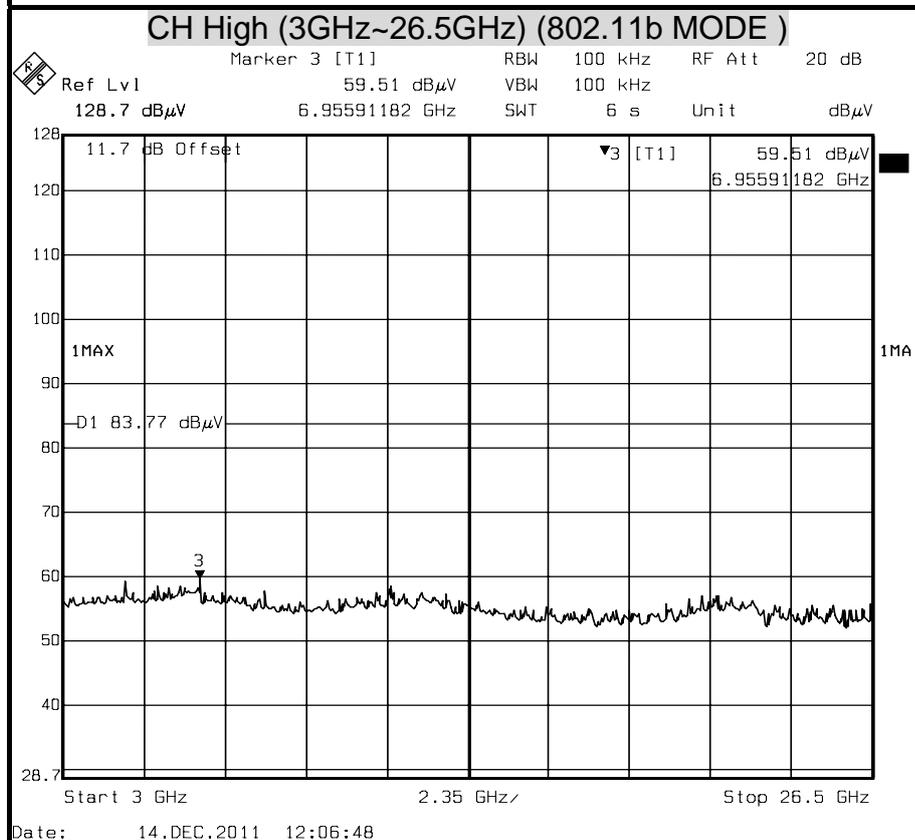
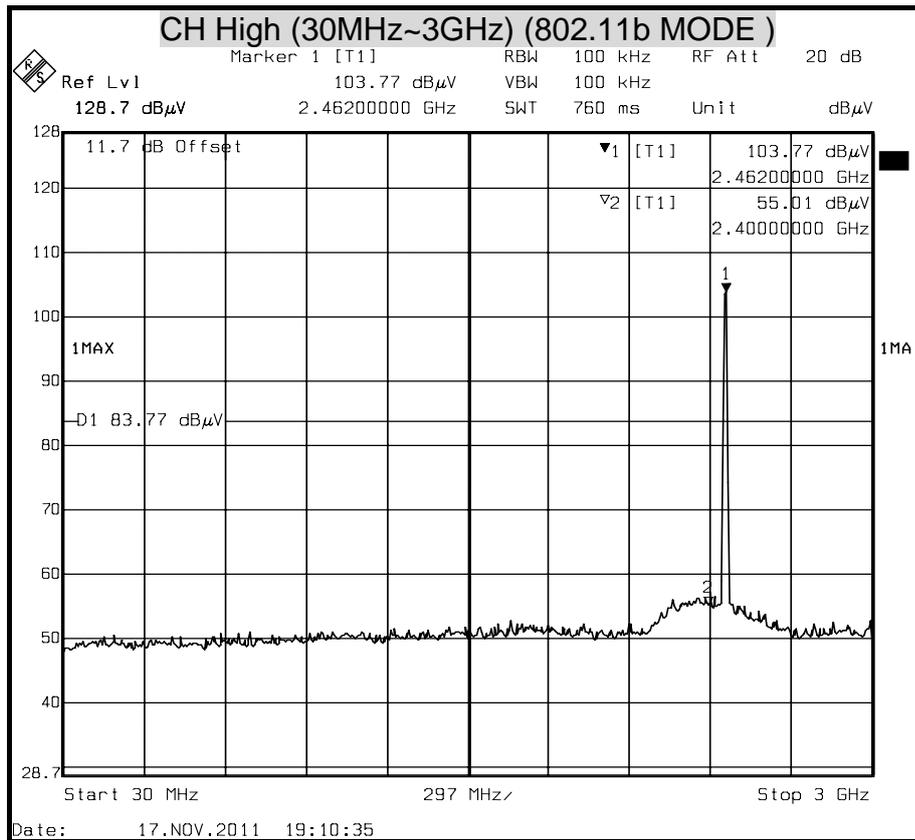




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (802.11g MODE)

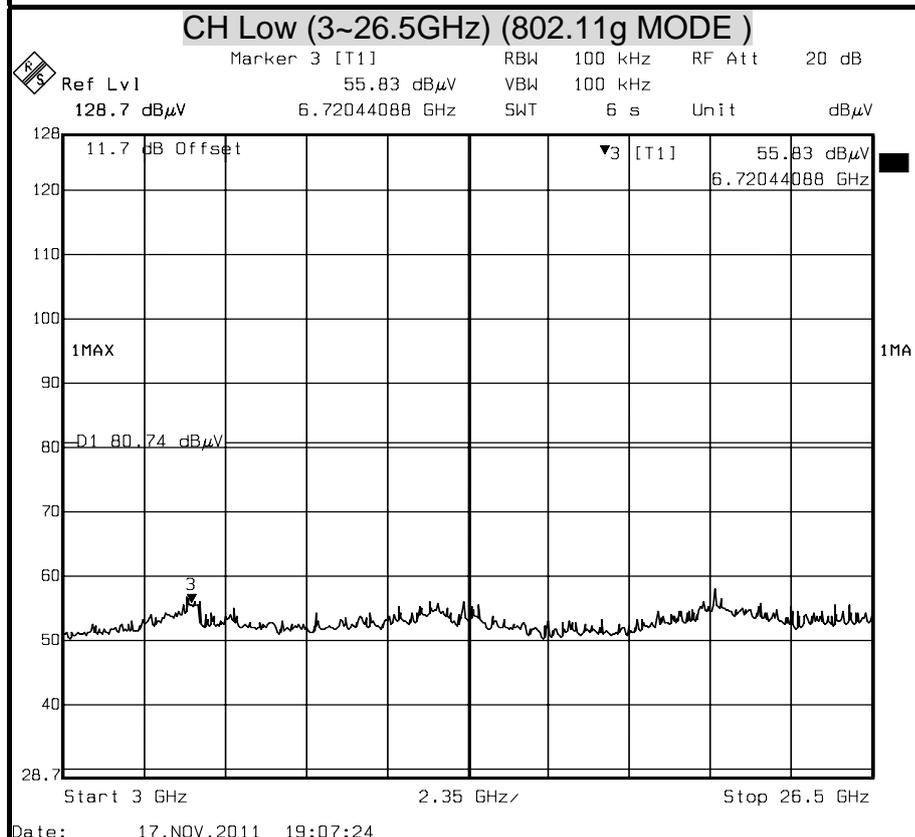
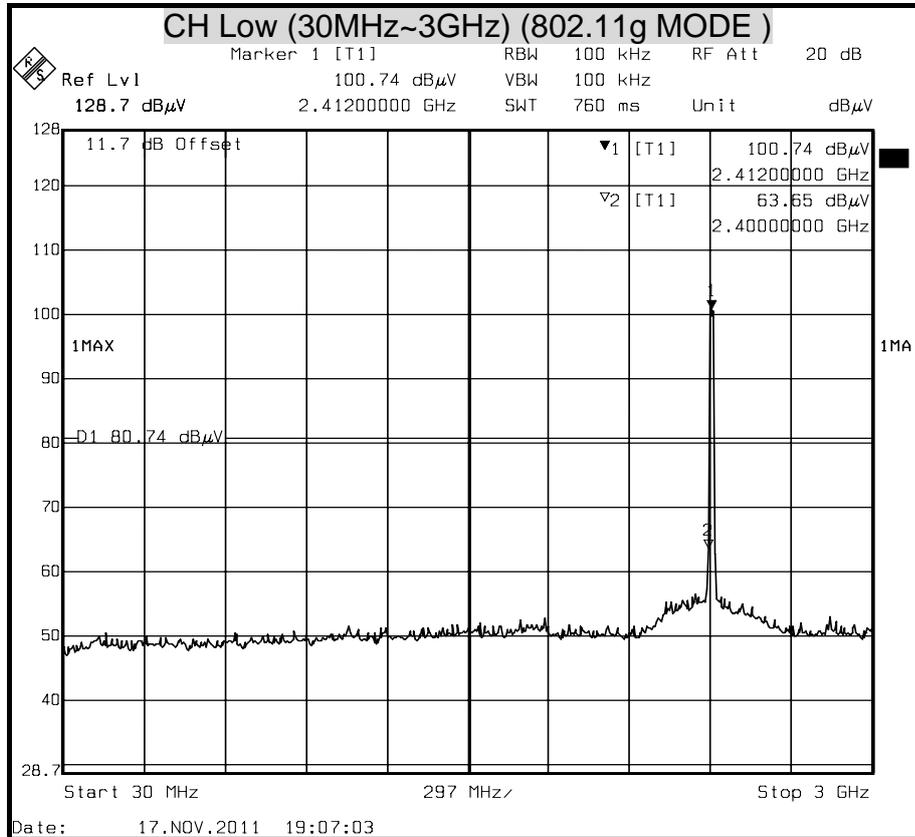


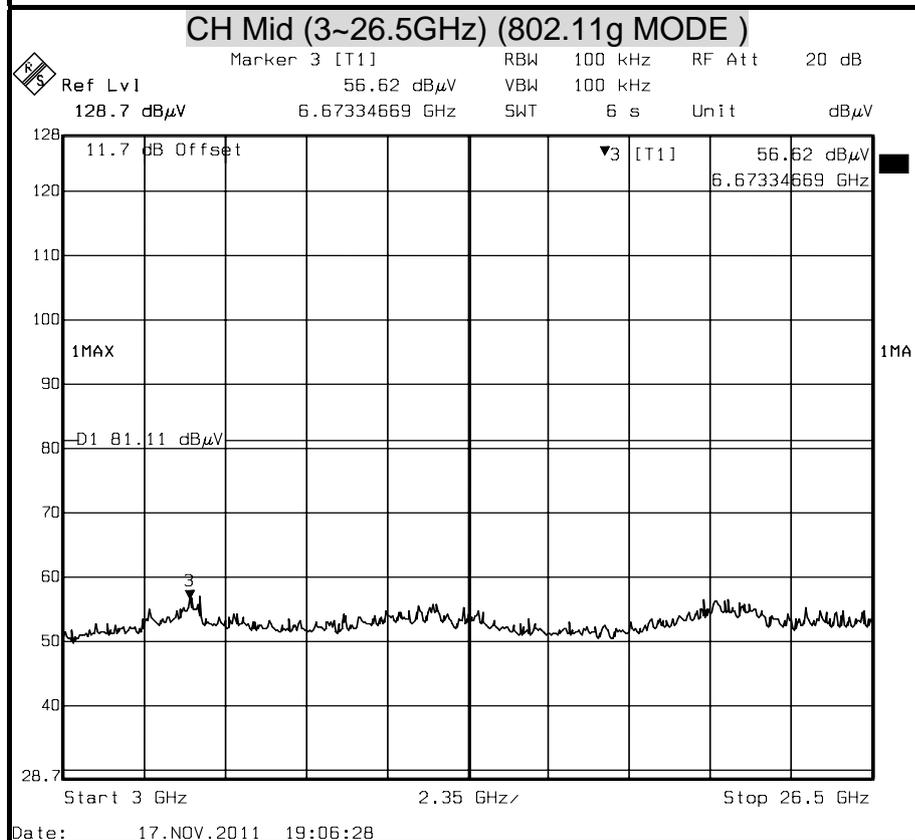
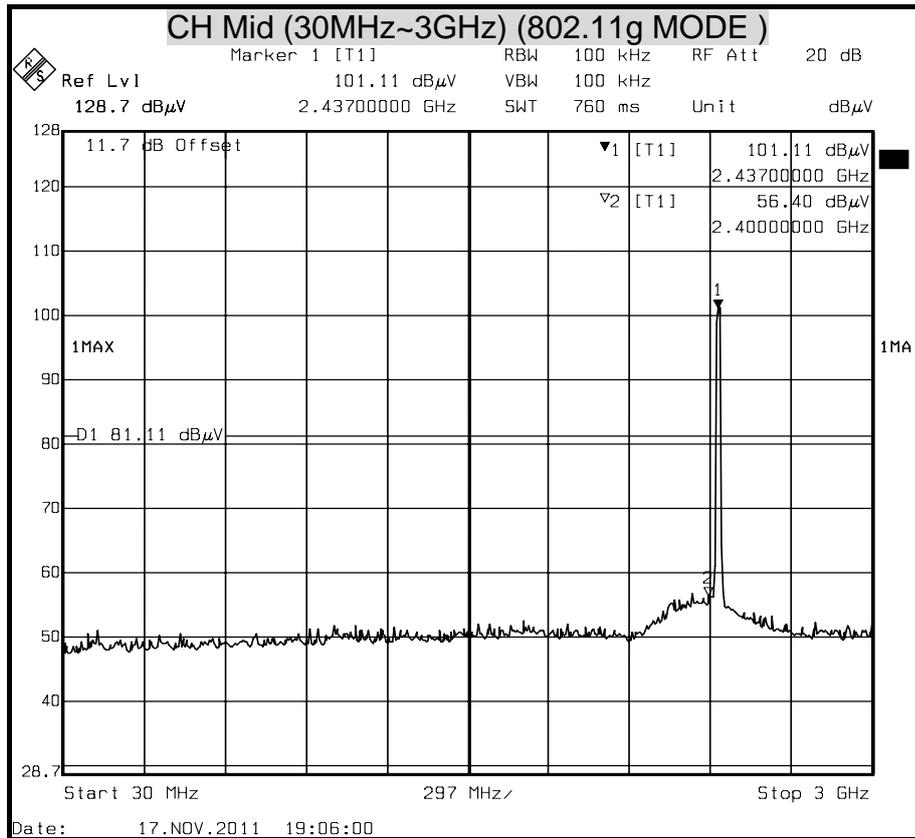


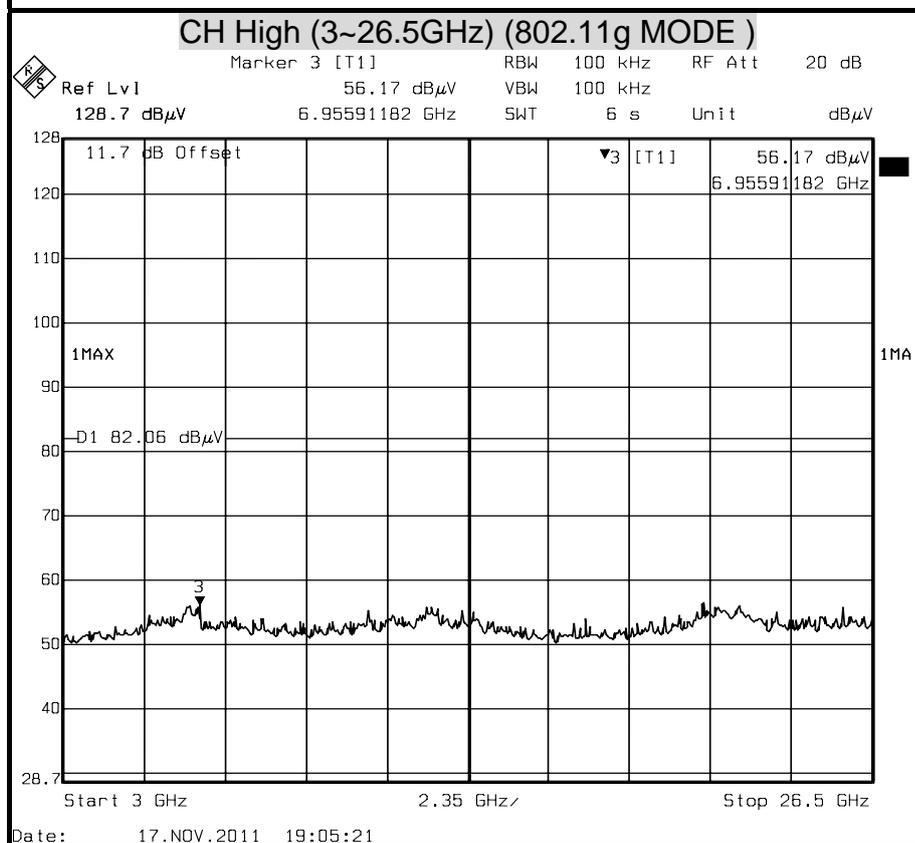
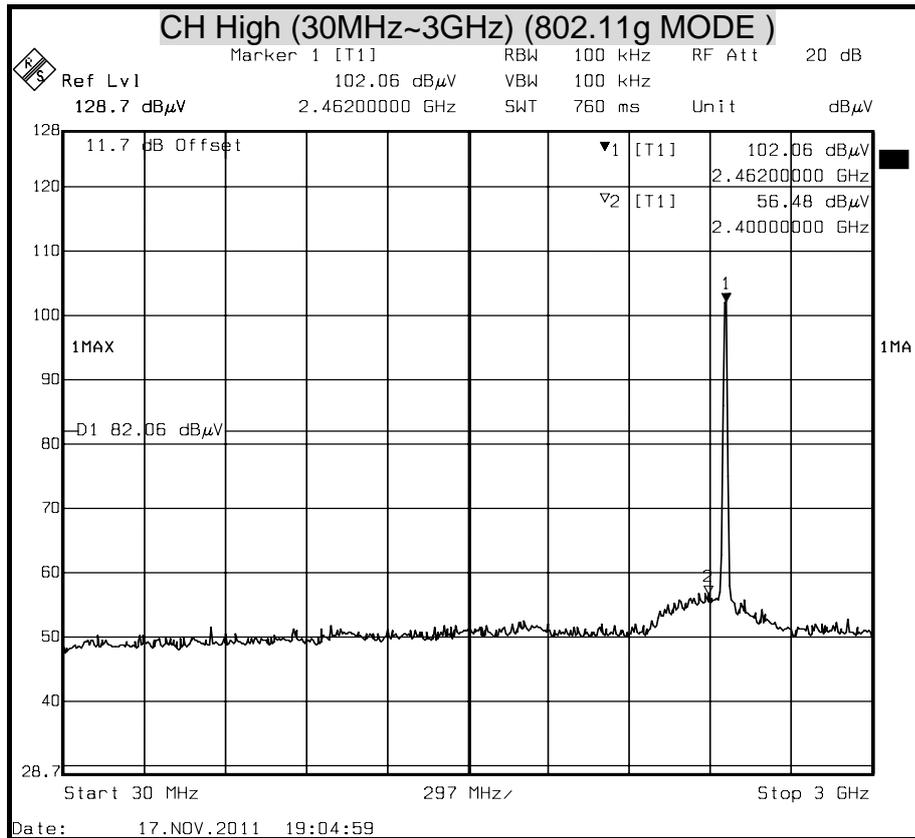








OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT
(802.11n HT20 MODE)

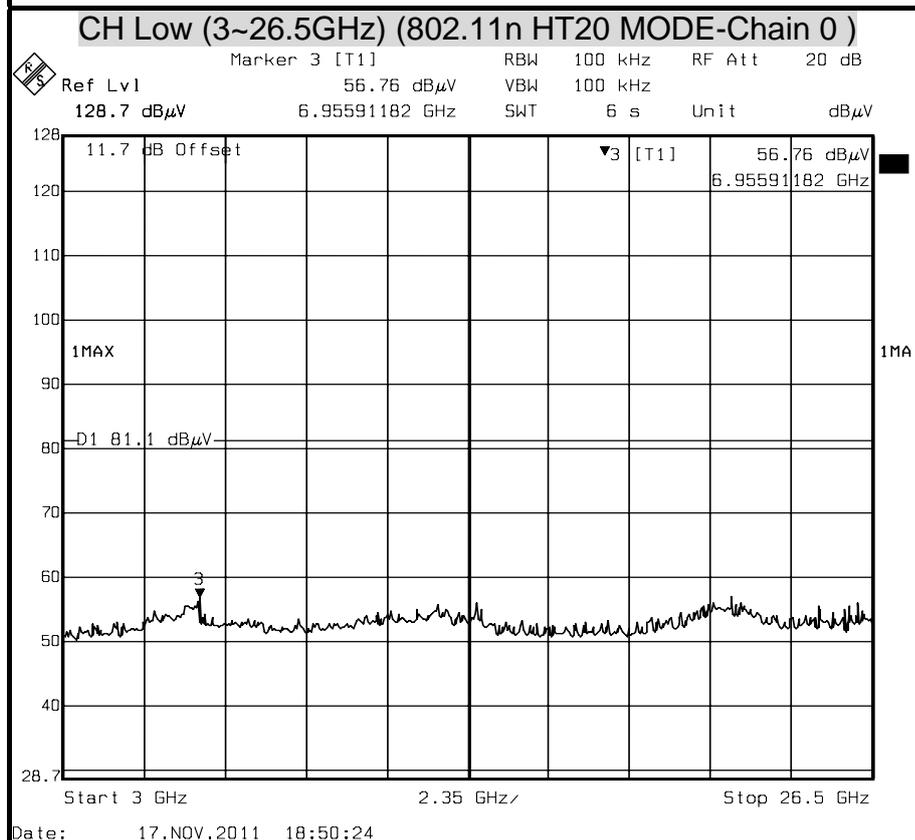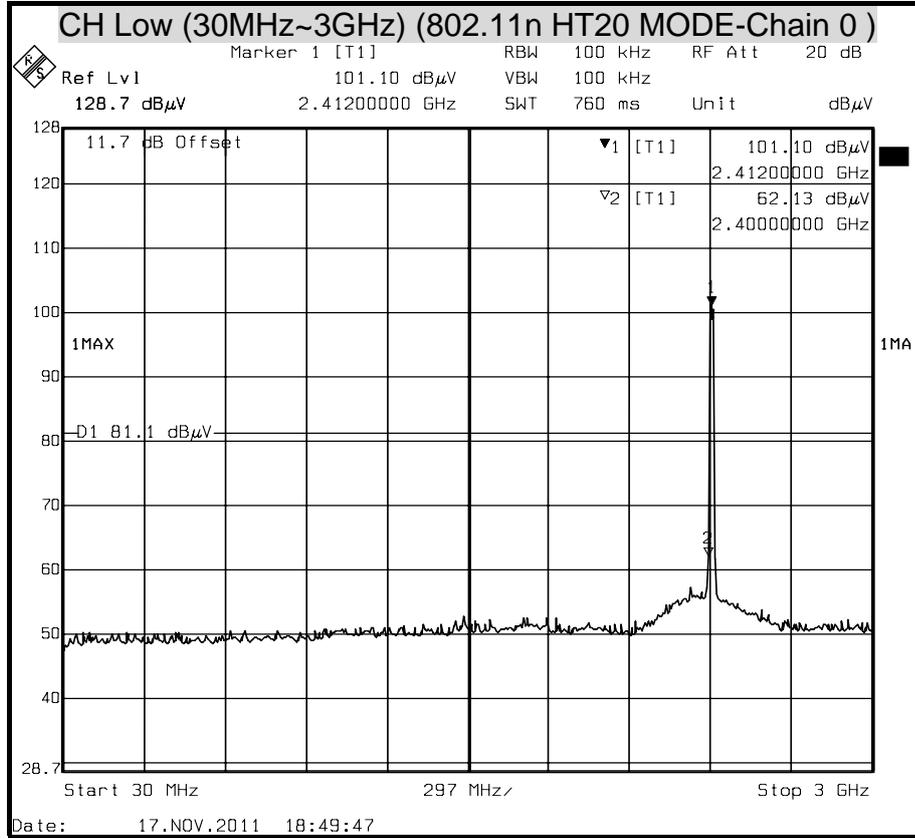

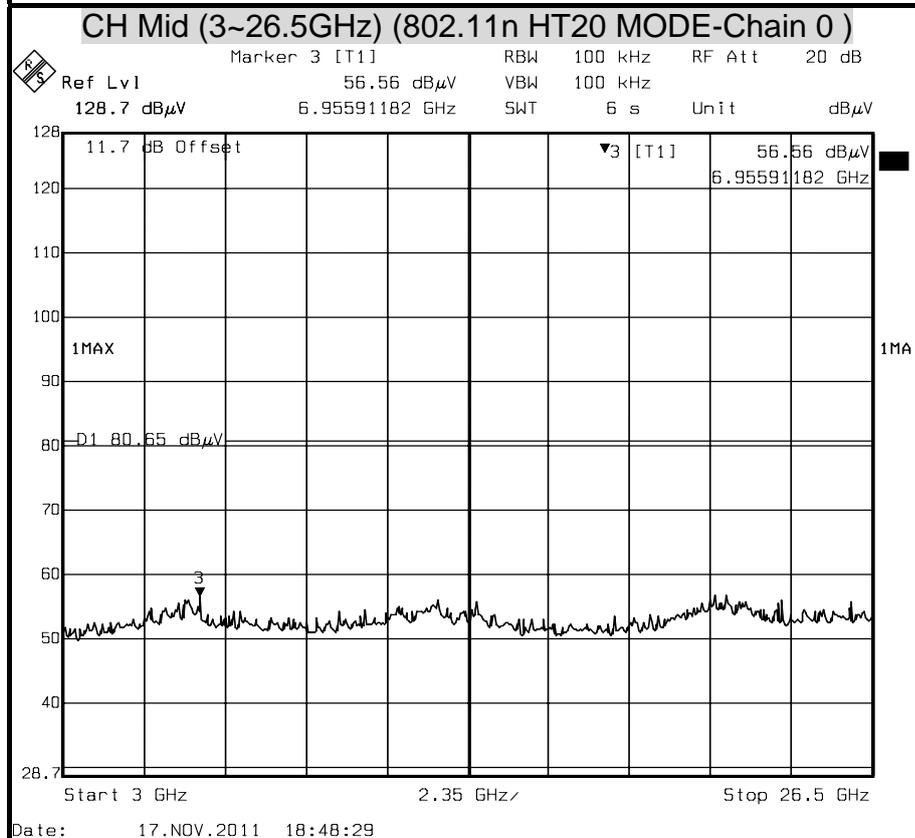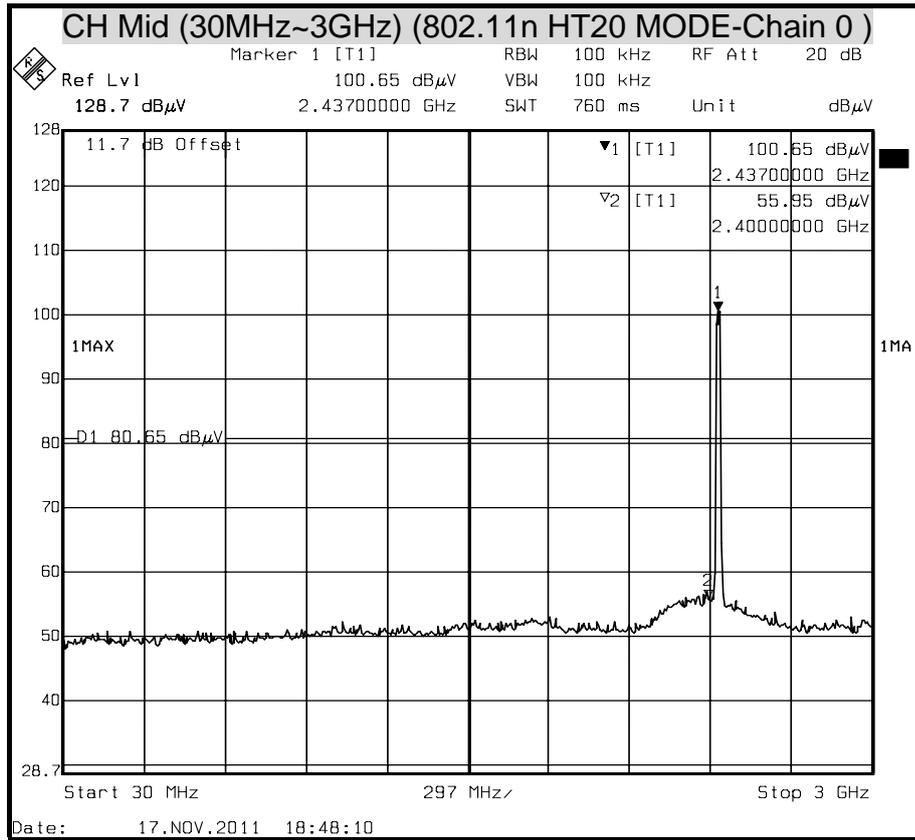

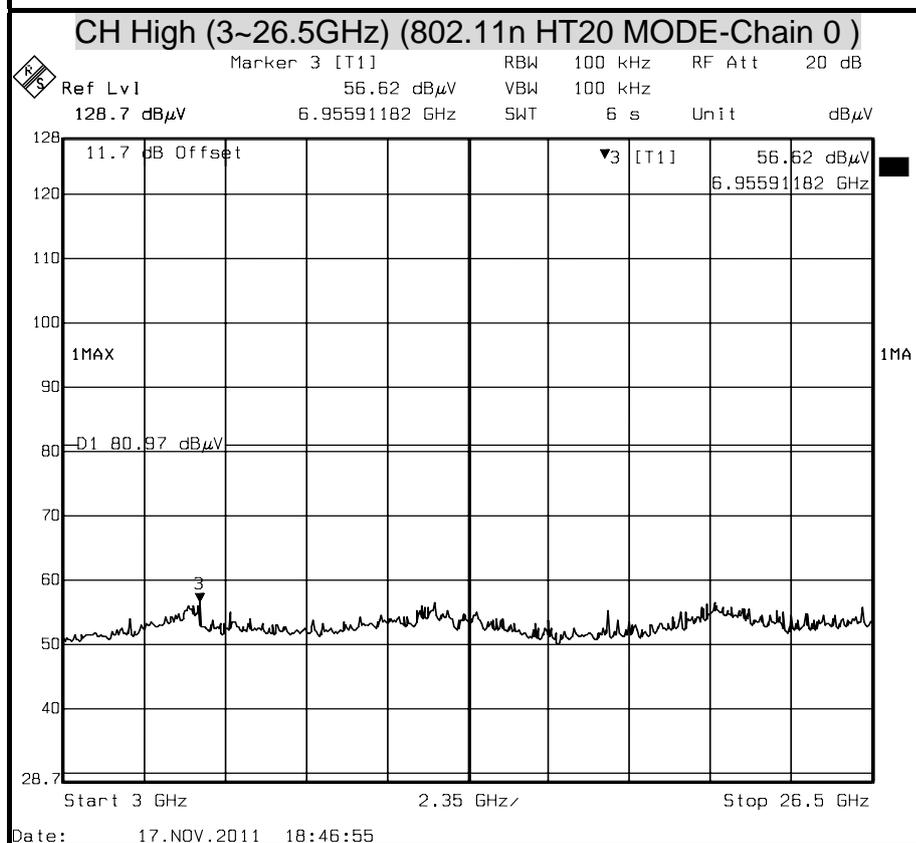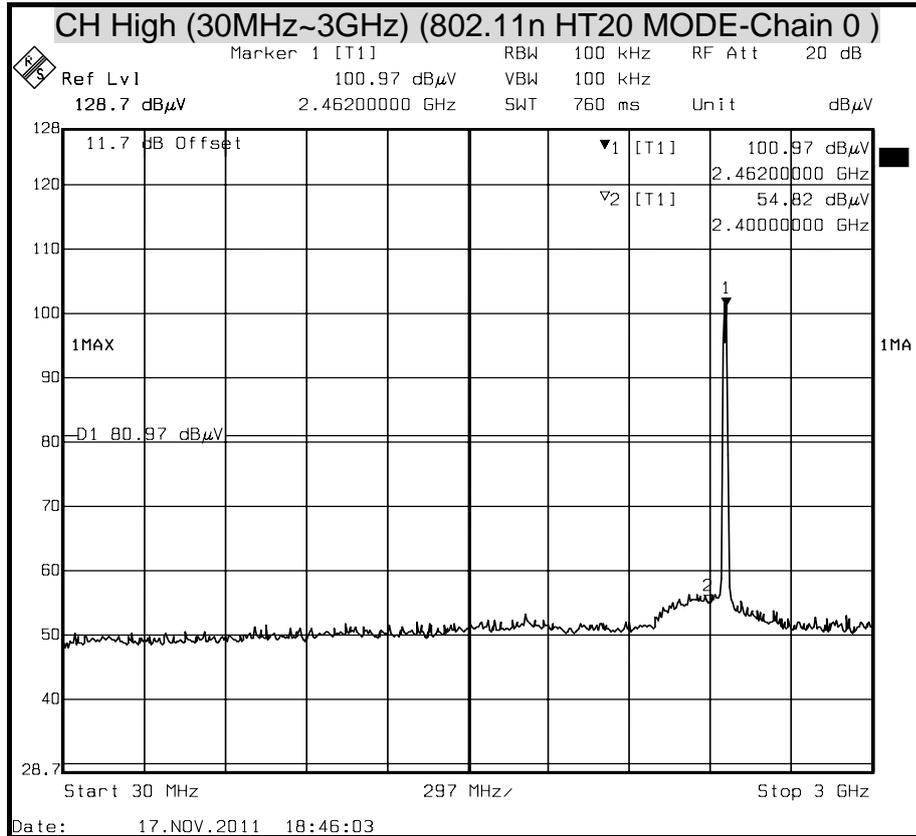

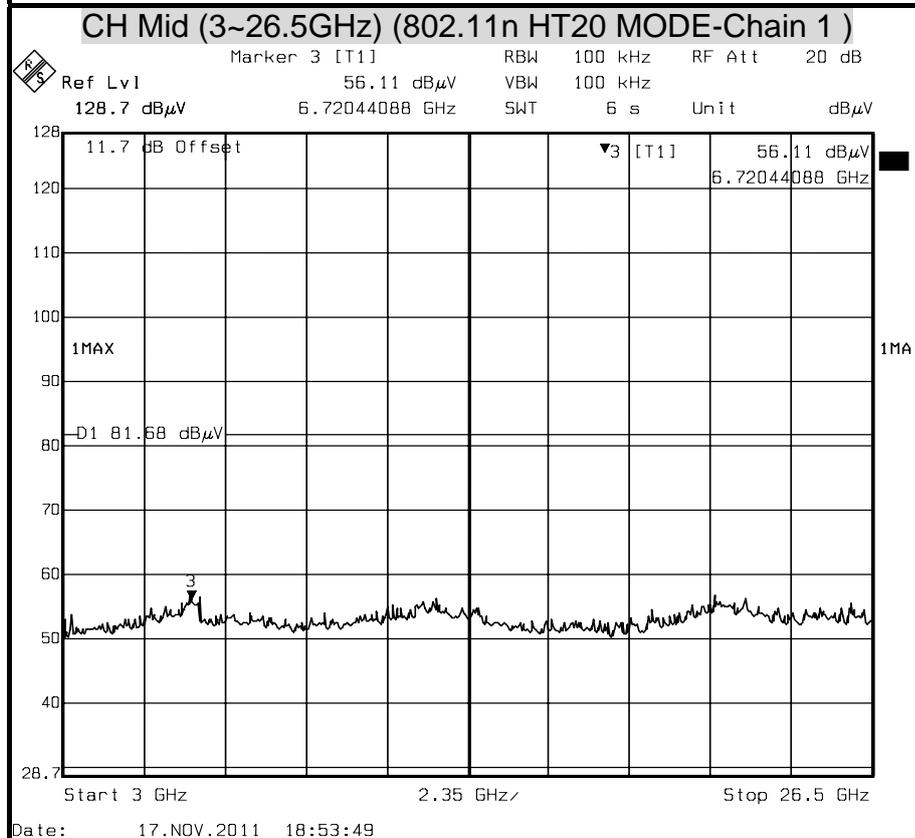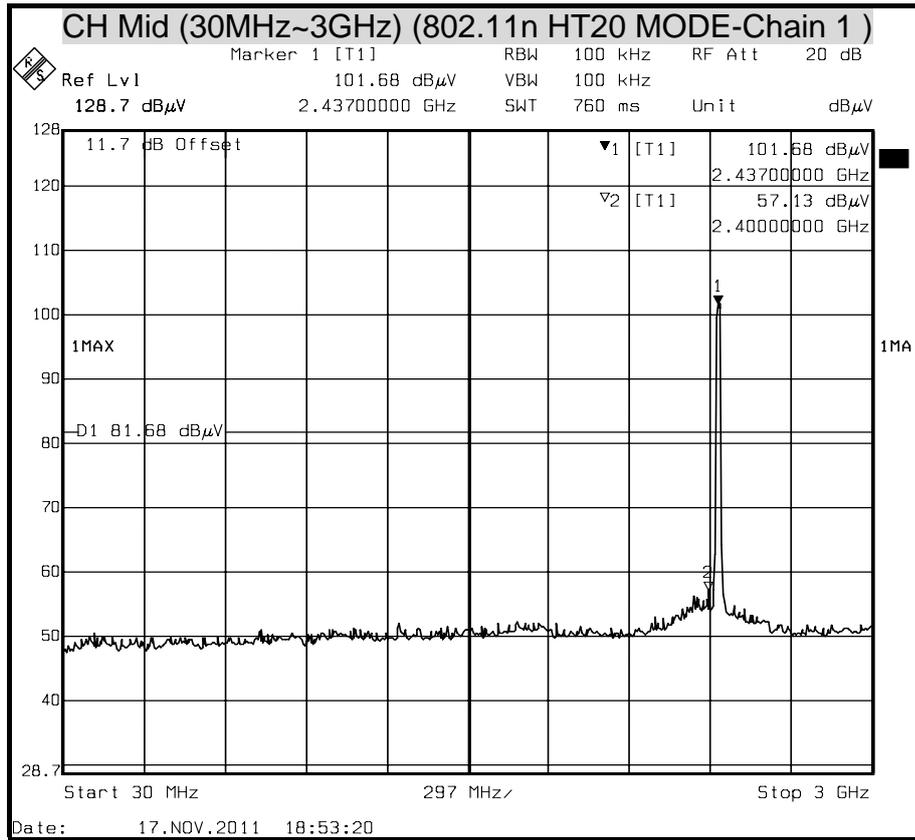

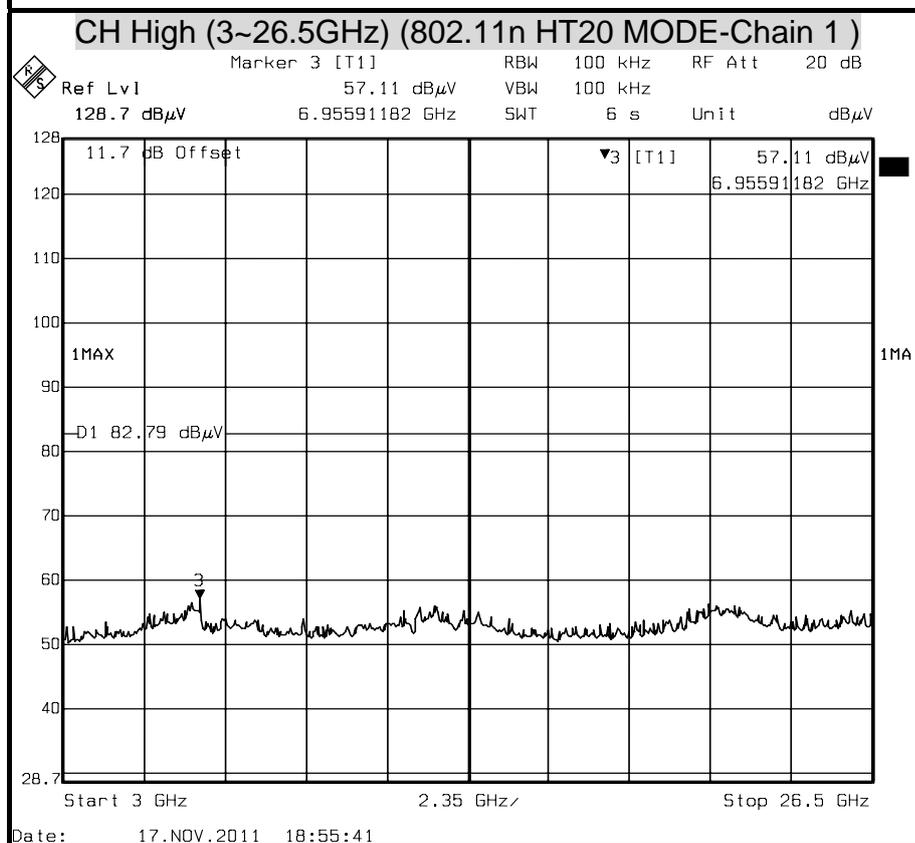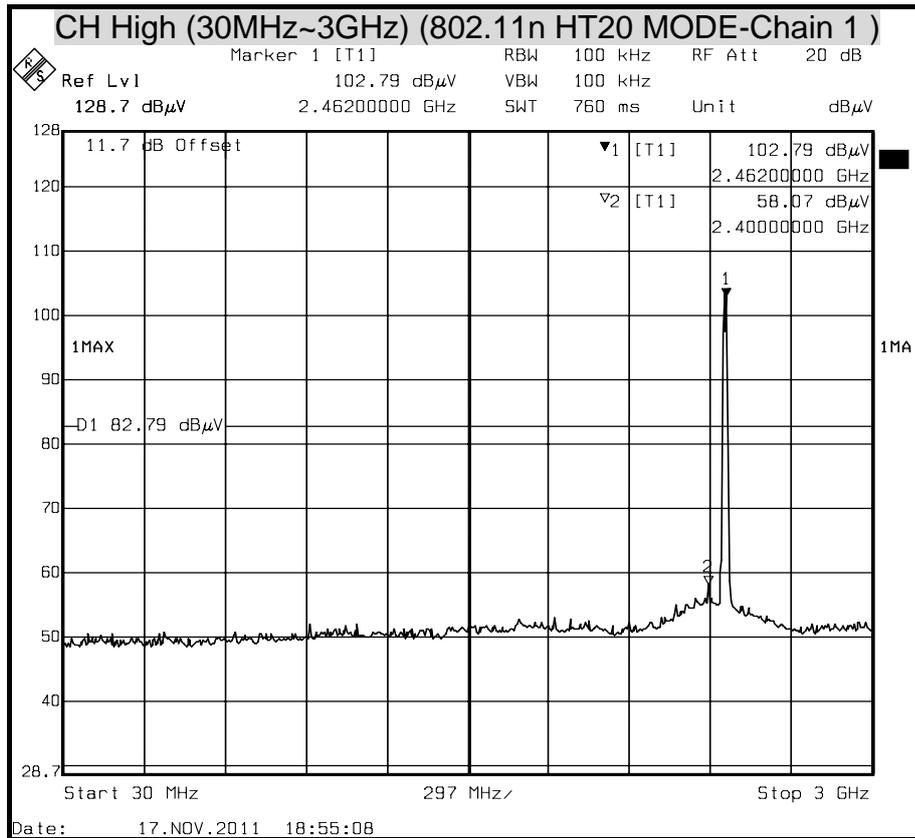



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (802.11n HT40 MODE)

