



A D T

FCC TEST REPORT (15.407)

REPORT NO.: RF990315H02-1

MODEL NO.: DIR-815

RECEIVED: Mar. 15, 2010

TESTED: Apr. 21 to May 05, 2010

ISSUED: June 25, 2010

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei
City 114, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 81 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by any government agencies. The test results in the report only apply to the tested sample.



A D T

Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	11
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	12
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4	DESCRIPTION OF SUPPORT UNITS.....	16
3.5	CONFIGURATION OF SYSTEM UNDER TEST	17
4.	TEST TYPES AND RESULTS	19
4.1	CONDUCTED EMISSION MEASUREMENT.....	19
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	19
4.1.2	TEST INSTRUMENTS	19
4.1.3	TEST PROCEDURES.....	20
4.1.4	DEVIATION FROM TEST STANDARD	20
4.1.5	TEST SETUP	21
4.1.6	EUT OPERATING CONDITIONS	21
4.1.7	TEST RESULTS	22
4.2	RADIATED EMISSION MEASUREMENT	26
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	26
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	27
4.2.3	TEST INSTRUMENTS	28
4.2.4	TEST PROCEDURES.....	30
4.2.5	DEVIATION FROM TEST STANDARD	30
4.2.6	TEST SETUP	31
4.2.7	EUT OPERATING CONDITION.....	32
4.2.8	TEST RESULTS	33
4.3	PEAK TRANSMIT POWER MEASUREMENT.....	54
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	54
4.3.2	TEST INSTRUMENTS	54
4.3.3	TEST PROCEDURE.....	55
4.3.4	DEVIATION FROM TEST STANDARD	55
4.3.5	TEST SETUP	55
4.3.6	EUT OPERATING CONDITIONS	55
4.3.7	TEST RESULTS	56
4.4	PEAK POWER EXCURSION MEASUREMENT.....	62
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	62
4.4.2	TEST INSTRUMENTS	62
4.4.3	TEST PROCEDURE.....	62



4.4.4	DEVIATION FROM TEST STANDARD	62
4.4.5	TEST SETUP	62
4.4.6	EUT OPERATING CONDITIONS	62
4.4.7	TEST RESULTS	63
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	66
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.2	TEST INSTRUMENTS	66
4.5.3	TEST PROCEDURES.....	66
4.5.4	DEVIATION FROM TEST STANDARD	66
4.5.5	TEST SETUP	66
4.5.6	EUT OPERATING CONDITIONS	66
4.5.7	TEST RESULTS	67
4.6	FREQUENCY STABILITY	70
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	70
4.6.2	TEST INSTRUMENTS	70
4.6.3	TEST PROCEDURE	70
4.6.4	DEVIATION FROM TEST STANDARD	71
4.6.5	TEST SETUP	71
4.6.6	EUT OPERATING CONDITION.....	71
4.6.7	TEST RESULTS	72
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT	73
4.7.1	TEST INSTRUMENTS	73
4.7.2	TEST PROCEDURE	73
4.7.3	EUT OPERATING CONDITION.....	73
4.7.4	TEST RESULTS	73
5.	INFORMATION ON THE TESTING LABORATORIES	80
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	81



A D T

1. CERTIFICATION

PRODUCT: Wireless N Dual Band Router,
Wireless N Quadband Home Router

BRAND NAME: D-Link

MODEL NO.: DIR-815

TEST SAMPLE: MASS-PRODUCTION

TESTED: Apr. 21 to May 05, 2010

APPLICANT: D-Link Corporation

STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003

The above equipment (Model: DIR-815) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** June 25, 2010
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** June 25, 2010
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** June 25, 2010
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

[For 802.11a](#)

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.32dB at 0.500MHz
15.407(b/1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -0.7dB at 5150.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

NOTE:

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.3 dB
Radiated emissions (1GHz-18GHz)	2.49 dB
Radiated emissions (18GHz-40GHz)	2.70 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless N Dual Band Router, Wireless N Quadband Home Router
MODEL NO.	DIR-815
FCC ID	KA2IR815A1
POWER SUPPLY	DC 5V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11a/g: 54/48/36/24/18/12/9/6Mbps 802.11b:11/5.5/2/1Mbps HT20 MCS0~7 (800ns GI): 6.5Mbps, 13Mbps, 19.5Mbps, 26Mbps, 39Mbps, 52Mbps, 58.5Mbps, 65Mbps, HT20 MCS8~15 (800ns GI): 13Mbps, 26Mbps, 39Mbps, 52Mbps, 78Mbps, 104Mbps, 117Mbps, 130Mbps. HT40 MCS0~7 (800ns GI): 13.5Mbps, 27Mbps, 40.5Mbps, 54Mbps, 81Mbps, 108Mbps, 121.5Mbps, 135Mbps. HT40 MCS8~15 (800ns GI): 27Mbps, 54Mbps, 81Mbps, 108Mbps, 162Mbps, 216Mbps, 243Mbps, 270Mbps. HT20 MCS0~7 (400ns GI): 7.2Mbps, 14.4Mbps, 21.7Mbps, 28.9Mbps, 43.3Mbps, 57.8Mbps, 65.0Mbps, 72.2Mbps, HT20 MCS8~15 (400ns GI): 14.444Mbps, 28.889Mbps, 43.333Mbps, 57.778Mbps, 86.667Mbps, 115.556Mbps, 130.000Mbps, 144.444Mbps. HT40 MCS0~7 (400ns GI): 15.0Mbps, 30.0Mbps, 45.0Mbps, 60.0Mbps, 90.0Mbps, 120.0Mbps, 135.0Mbps, 150.0Mbps, HT40 MCS8~15 (400ns GI): 30.0Mbps, 60.0Mbps, 90.0Mbps, 120.0Mbps, 180.0Mbps, 240.0Mbps, 270.0Mbps, 300.0Mbps.
OPERATING FREQUENCY	For 15.407 802.11a: 5.18 ~ 5.24GHz For 15.247 802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.745 ~ 5.825GHz



NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
	For 15.247(2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
	For 15.247(5GHz) 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 29.5mW 802.11n (20MHz): 28.3mW 802.11n (40MHz): 46.9mW For 15.247(2.4GHz) 802.11b: 131.8mW 802.11g: 457.1mW 802.11n (20MHz): 480.9mW 802.11n (40MHz): 564.3mW For 15.247(5GHz) 802.11a: 218.8mW 802.11n (20MHz): 570.2mW 802.11n (40MHz): 413.1mW
ANTENNA TYPE	Please see note 2
ANTENNA CONNECTOR	Please see note 2
DATA CABLE	Ethernet cable (Unshielded, 1.5m)
I/O PORTS	Internet port x 1 LAN port x 4
ASSOCIATED DEVICES	Adapter x 1

NOTE:

- The EUT has two product names which are identical to each other in all aspects except for the following :

Model No.	Product Name	Description
DIR-815	Wireless N Dual Band Router	for different marketing
	Wireless N Quadband Home Router	



A D T

2. There are two antennas provided to this EUT, please refer to the following table:

Chain	Manufacture	Model name	Antenna Gain		Antenna Cable Length	Antenna Type	Connector
			For 2.4GHz Gain (dBi)	For 5GHz Gain (dBi)			
Chain (0) Antenna (1)	Master Wave Technology Co., Ltd.	98144PIPF000	2.90686	5G Band1: 3.82562 5G Band4: 3.33016	48mm	Dipole	IPEX
Chain (1) Antenna (2)	Master Wave Technology Co., Ltd.	98144PIPF001	2.29251	5G Band1:3.25853 5G Band4: 2.82877	245mm	Dipole	IPEX

3. There are two kinds of antenna cables provided to antennas, please refer to the following table:

Antenna Cable	Antenna Cable Length	Description
Cable 1	48mm	Metal color (Thick line)
	245mm	
Cable 2	48mm	Black color (Thin line)
	245mm	

The EUT was pre-tested with above cables, the worse case was found in **cable 1** . Therefore only the test data of the cable was recorded in this report.

4. The EUT must be supplied with a power adapter and following two different models could be chosen:

Adapter 1	
Brand:	D-Link
Model No.:	CF1505-B
Input power :	AC100-120V, 0.4A, 50-60Hz
Output power :	DC 5V, 2.5A DC output cable (Unshielded, 1.5m)
Adapter 2	
Brand:	D-Link
Model No.:	AMS3-0502500SU
Input power :	AC100-120V, 0.5A, 50/60Hz
Output power :	DC 5V, 2.5A DC output cable (Unshielded, 1.5m)

For radiated test, the EUT was pre-tested with above adapters, the worse case was found in adapter 1. Therefore only the test data of the adapter was recorded in this report.

5. The EUT was pre-tested in chamber under the following modes:

Test Mode	Description
Mode A	Level-set (Put on tabletop)
Mode B	Tower-set (Wall-mounted)

From the above modes, the radiated emission worse case was found in Mode B. Therefore only the test data of the mode was recorded in this report.

6. The EUT incorporates a MIMO function with 802.11n. Physically, the EUT provides two completed transmitters and two completed receivers.
7. The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function. The antenna configurations are two transmitter antennas and two receiver antennas, as there are 2 Dipole antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas. The 11abg legacy mode is limited to single transmitter only.
8. The EUT complies with 802.11n standards and backwards compatible with 802. 11a, 802.11b, 802.11g products.
9. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5250MHz bands:

Four channels are provided for 802.11a and 802.11n (20MHz):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
1	√	√	√	√	with Adapter 1
2	√				with Adapter 2

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	TX CHAIN(0)	TX CHAIN(1)
A	802.11 a	√	
B	802.11n(20MHz) for MCS0~7	√	√
C	802.11n(20MHz) for MCS8~15	√	√
D	802.11n(40MHz) for MCS0~7	√	√
E	802.11n(40MHz) for MCS8~15	√	√

Note:

1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
2. Mode A, B and D the worst modes, were selected as representative mode for the report.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION
802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13.5	D

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION
802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13.5	D

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6	A
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5	B
802.11n (40MHz)	38 to 46	38,46	OFDM	BPSK	13.5	D

CONDUCTED OUT-BAND EMISSION MEASUREMENT :

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION
802.11a	36 to 48	36, 48	OFDM	BPSK	6	A
802.11n (20MHz)	36 to 48	36, 48	OFDM	BPSK	6.5	B
802.11n (40MHz)	38 to 46	38,46	OFDM	BPSK	13.5	D

※ After verification, conducted out band emission as show worst chain in report by investigations.

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	COMBINATION
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6	A
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5	B
802.11n (40MHz)	38 to 46	38,46	OFDM	BPSK	13.5	D

※ After verification, bandwidth as show worst chain in report by investigations.

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	21deg. C, 63%RH, 1014 hPa	120Vac, 60Hz	Nick Tsai
RE<1G	23deg. C, 69%RH, 1014 hPa	120Vac, 60Hz	Rex Huang
PLC	28deg. C, 68%RH, 1014 hPa	120Vac, 60Hz	Leo Peng
APCM	25deg. C, 60%RH, 1014 hPa	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	CN-04Y212-48643-38E-0145	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP18L	6976685584	FCC DoC
3	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166-5C-A-0448	PIW632500516610
4	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP Cable (10m)
2	UTP Cable (10m)
3	NA
4	UTP Cable (10m)


NOTE: 1. All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For conducted test:

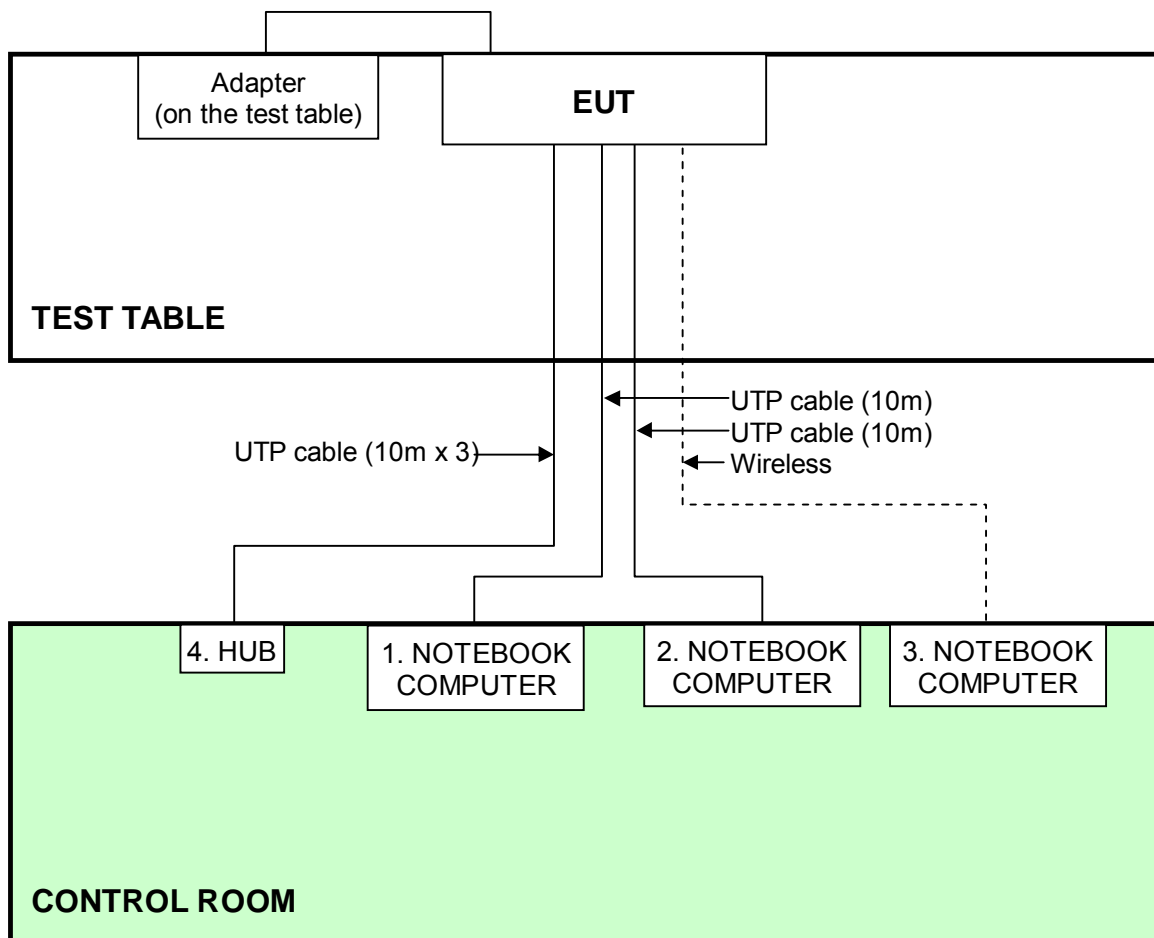

For other test items:

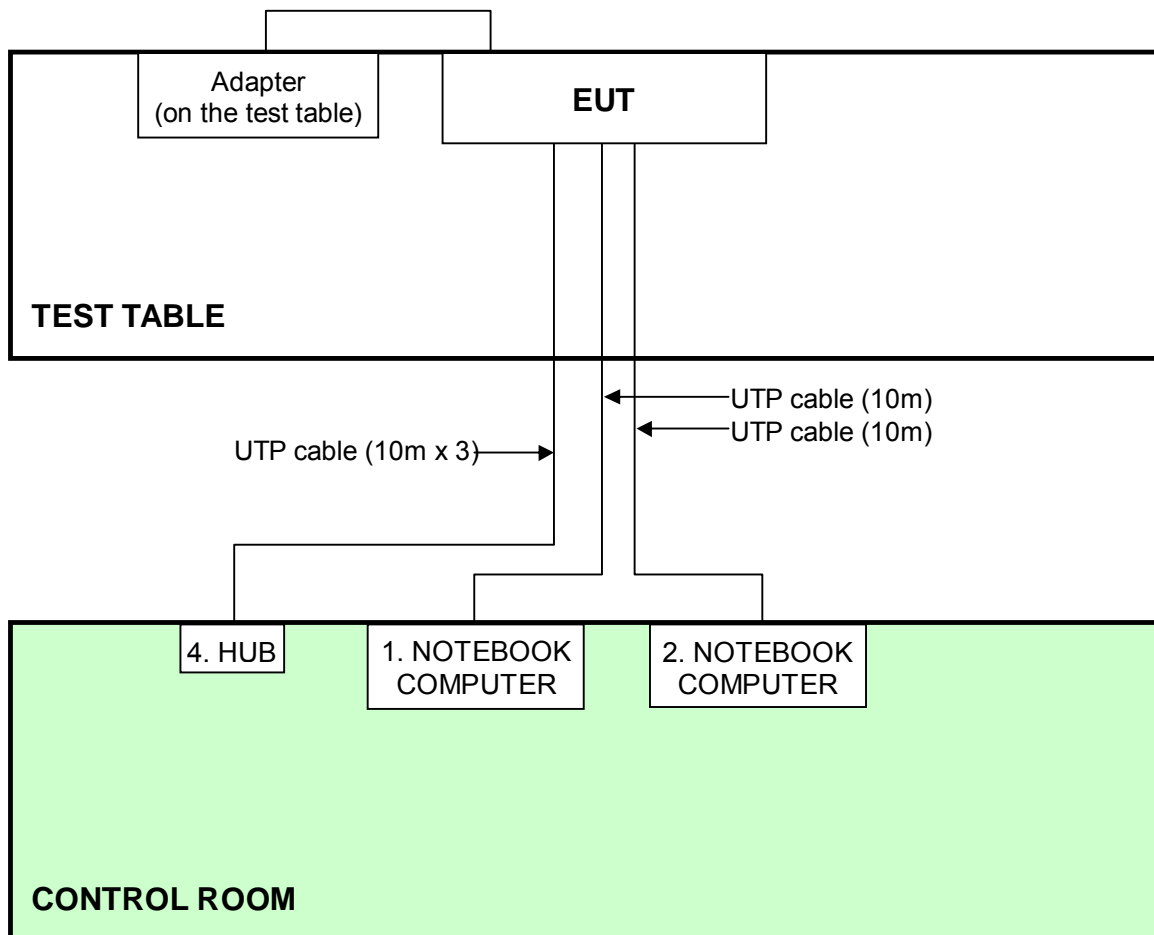



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 01, 2010	Feb. 28, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 23, 2009	Sep. 22, 2010
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 08, 2009	June 07, 2010
RF Cable (JYEBAO)	5DFB	COACAB-001	Dec. 14, 2009	Dec. 13, 2010
50 ohms Terminator	50	3	Oct. 28, 2009	Oct. 27, 2010
Software	BV ADT_ Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.



A D T


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs
- b. provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

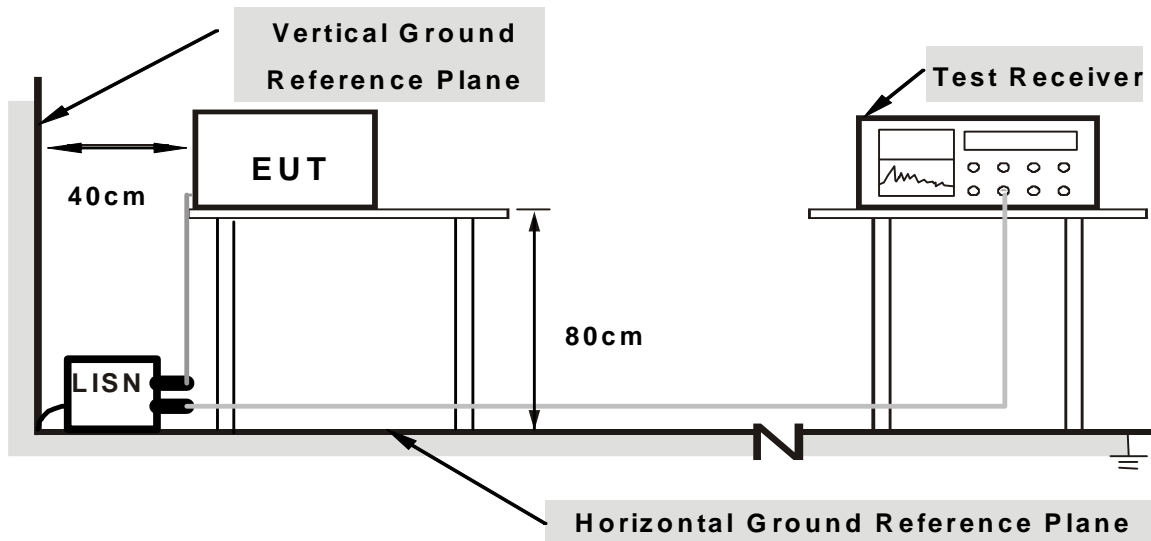

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on testing table.
- b. Prepared other computer systems (support units 1 ~ 3) to act as communication partners and placed them outside of testing area.
- c. The communication partners ran test program “Ping.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cables and wireless.


4.1.7 TEST RESULTS

802.11n (40MHz) OFDM MODULATION:

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
TEST MODE	With adapter 1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.04	47.75	35.88	47.79	35.92	66.00	56.00	-18.21	-20.08
2	0.213	0.04	51.35	41.02	51.39	41.06	63.11	53.11	-11.72	-12.05
3	0.255	0.05	41.01	30.54	41.06	30.59	61.58	51.58	-20.52	-20.99
4	0.615	0.07	38.40	32.49	38.47	32.56	56.00	46.00	-17.53	-13.44
5	3.305	0.17	36.34	31.07	36.51	31.24	56.00	46.00	-19.49	-14.76
6	17.407	0.50	42.79	38.90	43.29	39.40	60.00	50.00	-16.71	-10.60


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

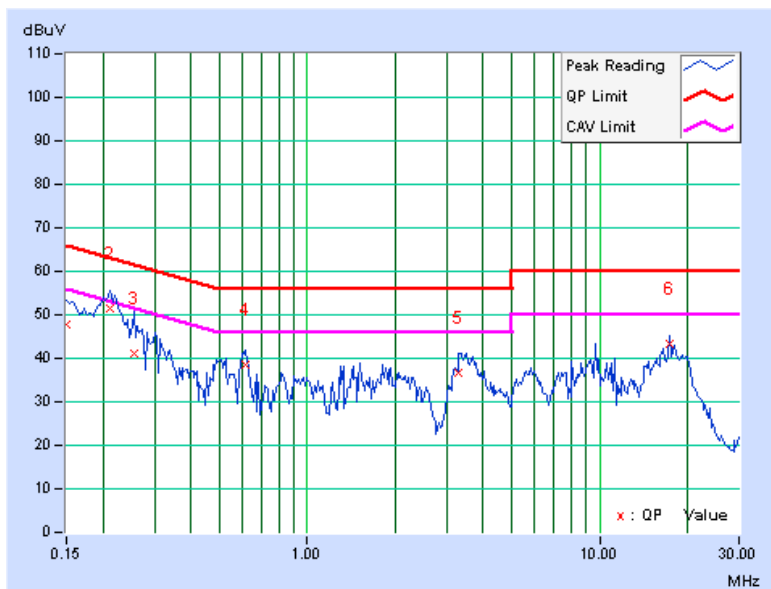

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
TEST MODE	With adapter 1		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.05	50.32	36.55	50.37	36.60	64.79	54.79	-14.42	-18.19
2	0.209	0.05	53.21	42.91	53.26	42.96	63.26	53.26	-10.00	-10.30
3	0.310	0.06	42.41	33.25	42.47	33.31	59.97	49.97	-17.50	-16.66
4	0.500	0.07	40.47	36.61	40.54	36.68	56.00	46.00	-15.46	-9.32
5	0.615	0.08	40.00	34.03	40.08	34.11	56.00	46.00	-15.92	-11.89
6	3.699	0.21	35.48	29.81	35.69	30.02	56.00	46.00	-20.31	-15.98


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

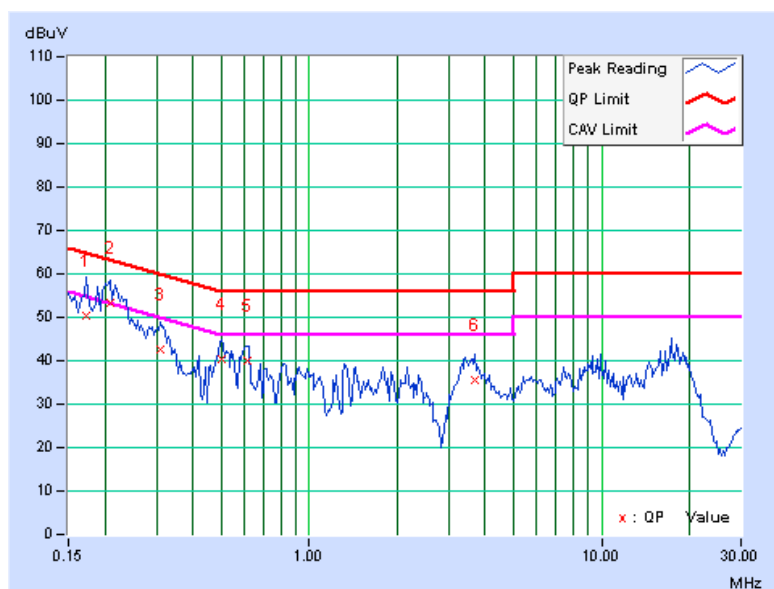

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
TEST MODE	With adapter 2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.04	41.01	28.11	41.05	28.15	66.00	56.00	-24.95	-27.85
2	0.163	0.04	31.97	12.40	32.01	12.44	65.33	55.33	-33.32	-42.89
3	0.189	0.04	36.91	27.10	36.95	27.14	64.08	54.08	-27.13	-26.94
4	10.080	0.36	39.95	37.50	40.31	37.86	60.00	50.00	-19.69	-12.14
5	15.363	0.47	37.82	33.51	38.29	33.98	60.00	50.00	-21.71	-16.02
6	17.887	0.51	38.38	33.47	38.89	33.98	60.00	50.00	-21.11	-16.02

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

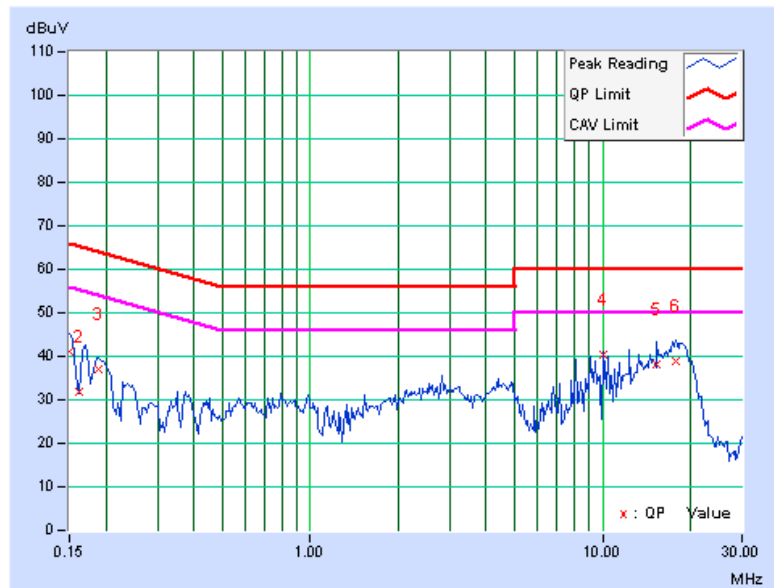




A D T

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
TEST MODE	With adapter 2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.05	39.91	28.36	39.96	28.41	66.00	56.00	-26.04	-27.59
2	0.193	0.05	35.15	29.79	35.20	29.84	63.91	53.91	-28.71	-24.07
3	0.423	0.07	30.61	24.27	30.68	24.34	57.38	47.38	-26.70	-23.04
4	2.574	0.16	31.58	25.42	31.74	25.58	56.00	46.00	-24.26	-20.42
5	9.098	0.35	40.39	38.33	40.74	38.68	60.00	50.00	-19.26	-11.32
6	18.762	0.54	37.31	32.35	37.85	32.89	60.00	50.00	-22.15	-17.11

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

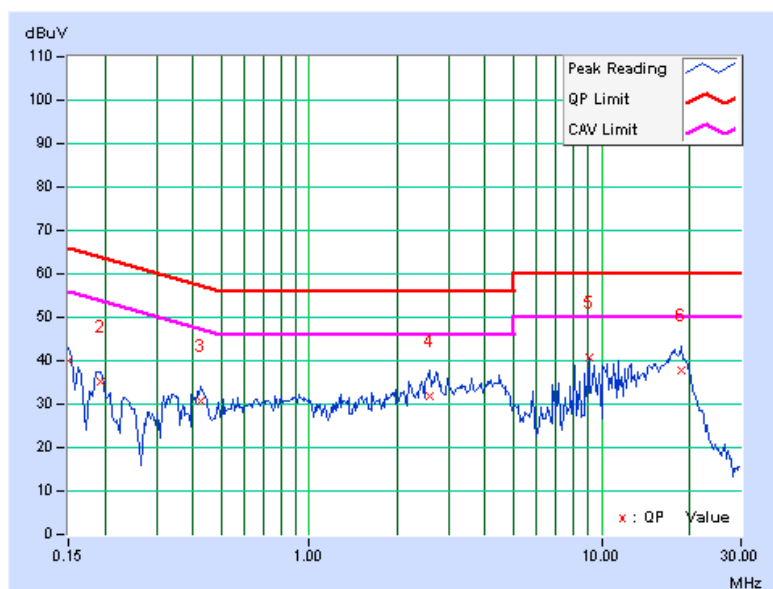



A D T

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

Below 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 03, 2009	Aug. 02, 2010
Agilent Pre-Selector	N9039A	MY46520311	Aug. 17, 2009	Aug. 16, 2010
Agilent Signal Generator	N5181A	MY49060517	July 20, 2009	July 19, 2010
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 18, 2009	Nov. 17, 2010
Agilent Pre-Amplifier	8449B	3008A02578	July 06, 2009	July 05, 2010
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Sep. 30, 2009	Sep. 29, 2010
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 16, 2009	Nov. 15, 2010
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Sep. 30, 2009	Sep. 29, 2010
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.06	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. G.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.



A D T

Above 1GHz test (Test date: Apr. 28, 2010)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 23 , 2010	Apr. 22 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Aug. 28, 2009	Aug. 27, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
R&S Loop Antenna	HFH2-Z2	100070	Jan. 13, 2010	Jan. 12, 2011
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 14, 2009	Aug. 13, 2010
RF Cable	8DFB	STCCAB-30M-1GHz	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Open Site No. C.
 4. The FCC Site Registration No. is 656396.
 5. The VCCI Site Registration No. is R-1626.
 6. The CANADA Site Registration No. is IC 7450G-3.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room for below 1GHz test and 10 meters open field site for above 1GHz test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD


No deviation

4.2.6 TEST SETUP

<Frequency Range below 1GHz>

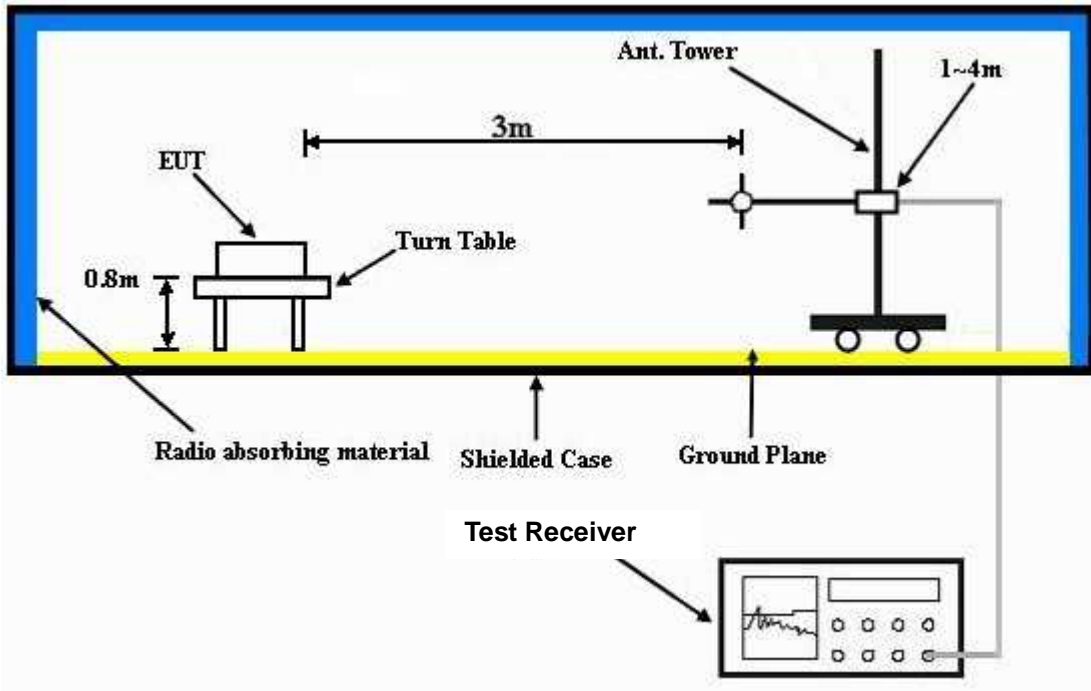

<Frequency Range above 1GHz>

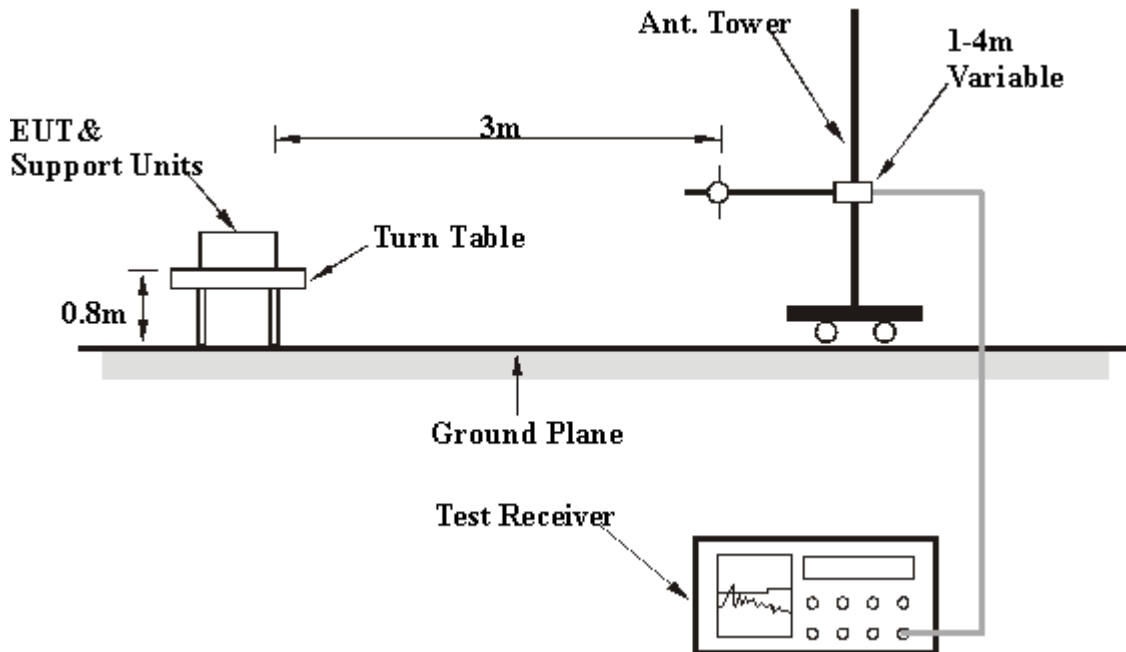

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 2) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “QA_RT3x9x v1.5.6.5” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cables.



A D T

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1014 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	124.97	36.9 QP	43.5	-6.6	2.45 H	65	24.59	12.31
2	175.10	32.2 QP	43.5	-11.4	2.00 H	247	19.73	12.42
3	250.20	35.2 QP	46.0	-10.8	1.50 H	338	22.34	12.86
4	375.01	29.5 QP	46.0	-16.5	1.25 H	65	13.12	16.42
5	500.01	30.0 QP	46.0	-16.0	1.75 H	321	10.74	19.28
6	624.99	35.7 QP	46.0	-10.3	1.00 H	2	13.66	22.08
7	750.01	28.5 QP	46.0	-17.6	2.25 H	333	4.50	23.95
8	874.99	34.2 QP	46.0	-11.8	1.75 H	3	8.39	25.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	44.00	36.9 QP	40.0	-3.1	1.25 V	203	22.65	14.22
2	77.25	35.2 QP	40.0	-4.8	1.25 V	45	25.58	9.65
3	250.10	32.2 QP	46.0	-13.8	1.25 V	98	19.34	12.86
4	375.01	31.0 QP	46.0	-15.0	1.75 V	110	14.58	16.42
5	500.01	34.2 QP	46.0	-11.8	1.00 V	236	14.92	19.28
6	624.99	35.3 QP	46.0	-10.7	1.50 V	326	13.22	22.08
7	830.02	32.5 QP	46.0	-13.6	1.25 V	5	7.29	25.16
8	874.95	35.9 QP	46.0	-10.1	1.00 V	180	10.04	25.82

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	1.04 H	320	21.02	36.00
2	5150.00	45.1 AV	54.0	-8.9	1.04 H	320	9.10	36.00
3	*5180.00	100.1 PK			1.04 H	320	64.04	36.05
4	*5180.00	91.6 AV			1.04 H	320	55.50	36.05
5	#10360.00	55.7 PK	68.3	-12.6	1.19 H	83	9.79	45.92
6	15540.00	62.8 PK	74.0	-11.2	1.21 H	70	14.88	47.93
7	15540.00	49.9 AV	54.0	-4.1	1.21 H	70	1.94	47.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.60 V	201	29.62	36.00
2	5150.00	52.8 AV	54.0	-1.2	1.60 V	201	16.82	36.00
3	*5180.00	108.9 PK			1.56 V	145	72.89	36.05
4	*5180.00	100.1 AV			1.56 V	145	64.08	36.05
5	#10360.00	56.8 PK	68.3	-11.5	1.45 V	178	10.91	45.92
6	15540.00	55.4 PK	74.0	-18.6	1.11 V	178	7.47	47.93
7	15540.00	44.6 AV	54.0	-9.4	1.11 V	178	-3.33	47.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	100.1 PK			1.05 H	320	64.00	36.08
2	*5200.00	91.6 AV			1.05 H	320	55.55	36.08
3	#10400.00	55.9 PK	68.3	-12.4	1.20 H	100	9.90	45.99
4	15600.00	62.7 PK	74.0	-11.3	1.05 H	36	14.93	47.78
5	15600.00	50.1 AV	54.0	-3.9	1.05 H	36	2.33	47.78
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.7 PK			1.00 V	80	72.62	36.08
2	*5200.00	100.0 AV			1.00 V	80	63.92	36.08
3	#10400.00	57.6 PK	68.3	-10.7	1.54 V	238	11.63	45.99
4	15600.00	55.6 PK	74.0	-18.4	1.28 V	164	7.82	47.78
5	15600.00	44.7 AV	54.0	-9.3	1.28 V	164	-3.12	47.78

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	99.0 PK			1.14 H	319	62.84	36.14
2	*5240.00	90.5 AV			1.14 H	319	54.40	36.14
3	5459.82	56.1 PK	74.0	-17.9	1.14 H	319	19.64	36.50
4	5459.82	44.1 AV	54.0	-9.9	1.14 H	319	7.63	36.50
5	#10480.00	56.0 PK	68.3	-12.3	1.10 H	114	9.87	46.12
6	15720.00	62.9 PK	74.0	-11.2	1.42 H	211	15.37	47.48
7	15720.00	49.9 AV	54.0	-4.1	1.42 H	211	2.38	47.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.7 PK			1.30 V	3	72.56	36.14
2	*5240.00	99.8 AV			1.30 V	3	63.66	36.14
3	5358.98	58.2 PK	74.0	-15.9	1.30 V	73	21.82	36.33
4	5358.98	46.3 AV	54.0	-7.7	1.30 V	73	9.95	36.33
5	#10480.00	57.9 PK	68.3	-10.4	1.42 V	179	11.78	46.12
6	15720.00	55.8 PK	74.0	-18.2	1.01 V	163	8.32	47.48
7	15720.00	44.2 AV	54.0	-9.8	1.01 V	163	-3.28	47.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH36, HORIZONTAL)

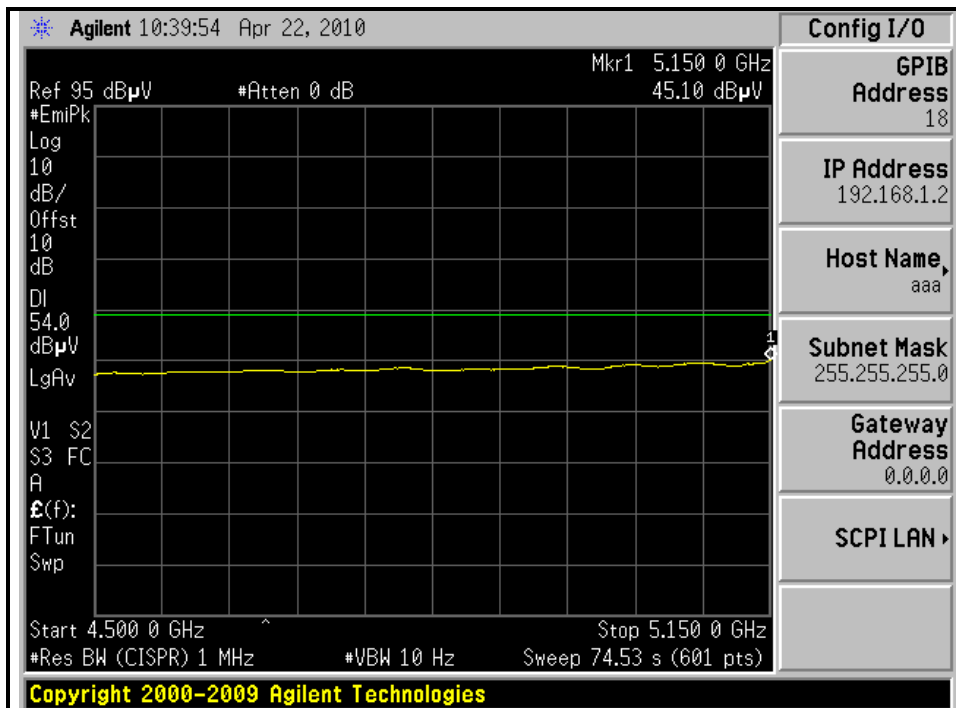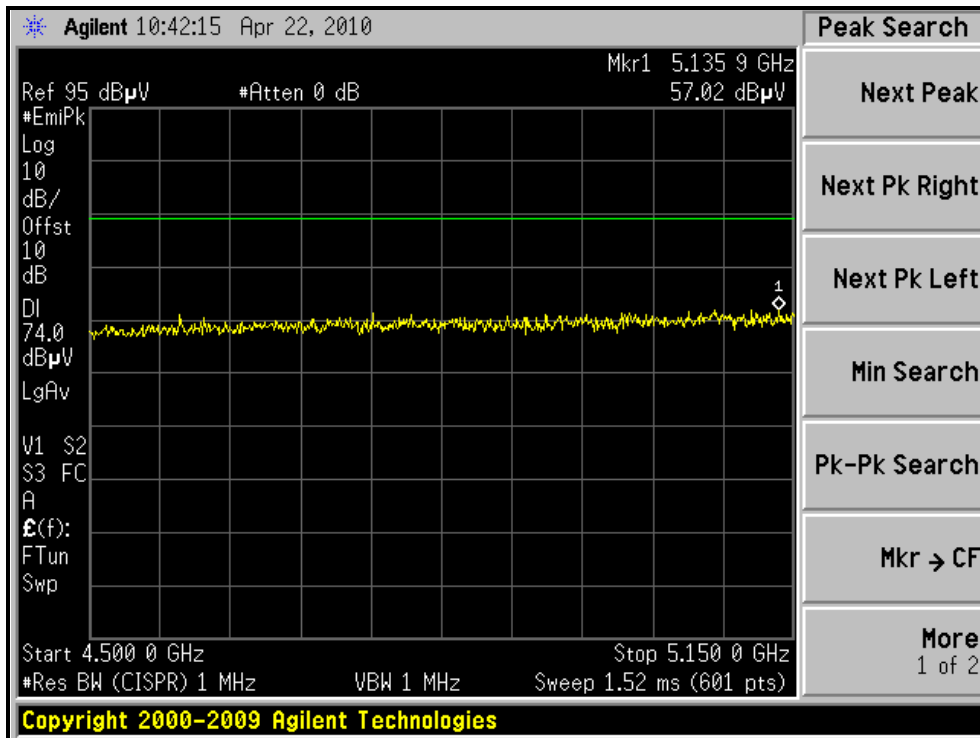



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH36, VERTICAL)

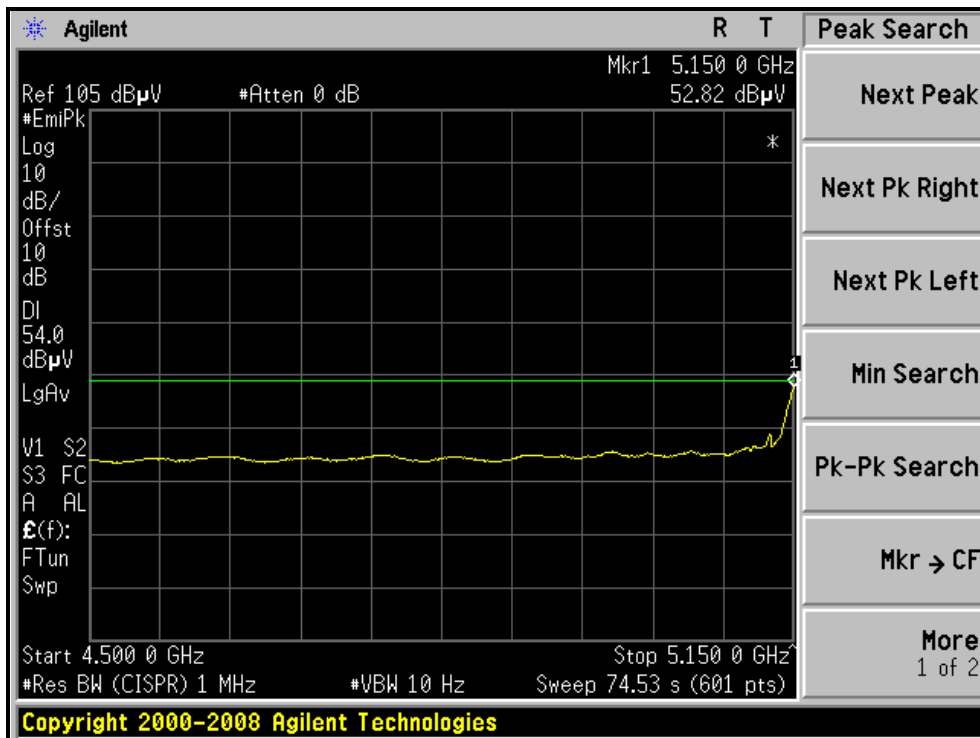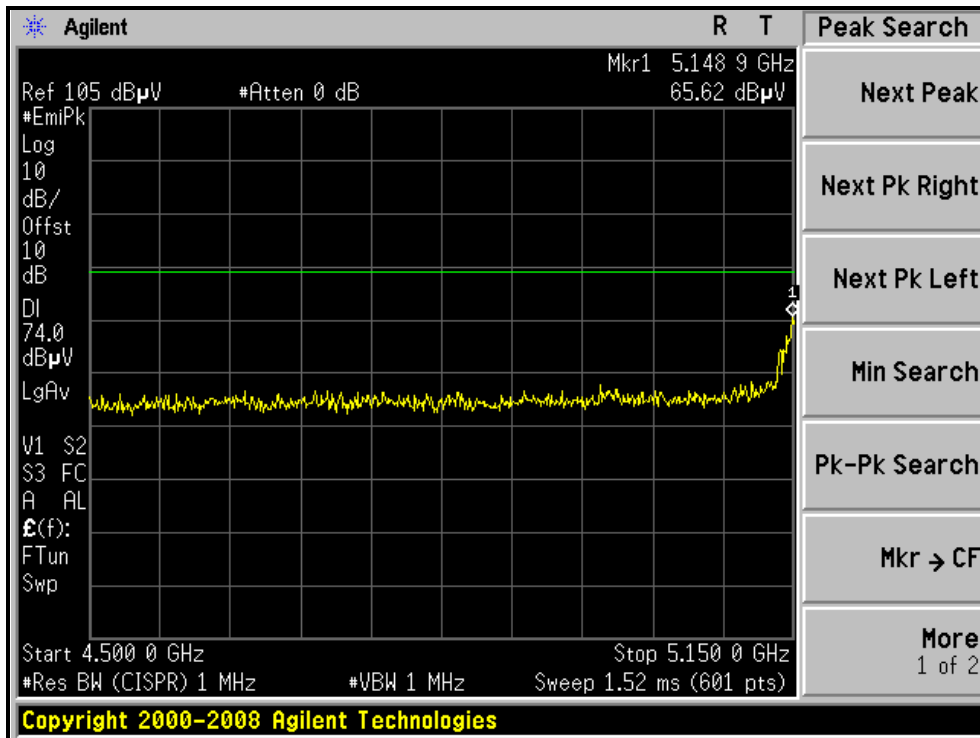



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH48, HORIZONTAL)

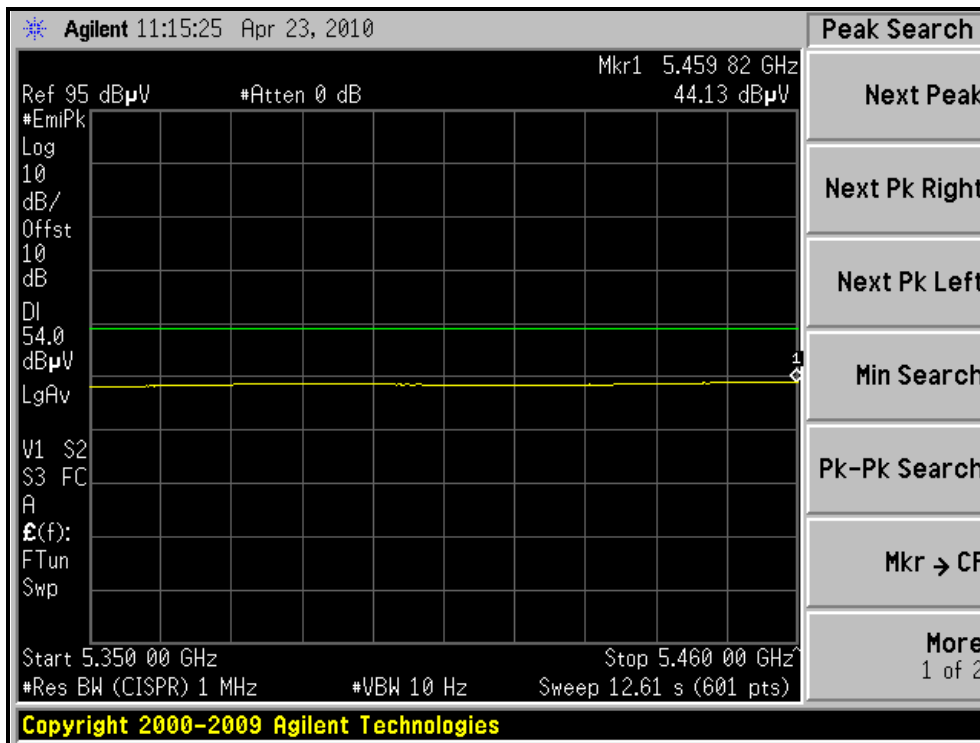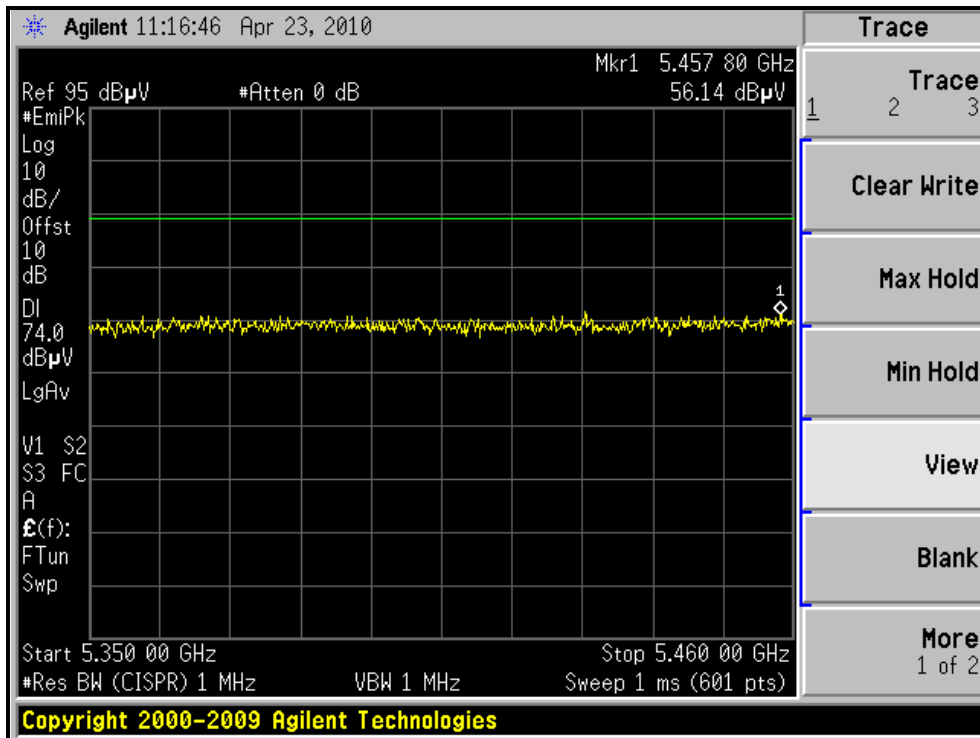



A D T

RESTRICTED BANDEDGE (802.11a MODE, CH48, VERTICAL)

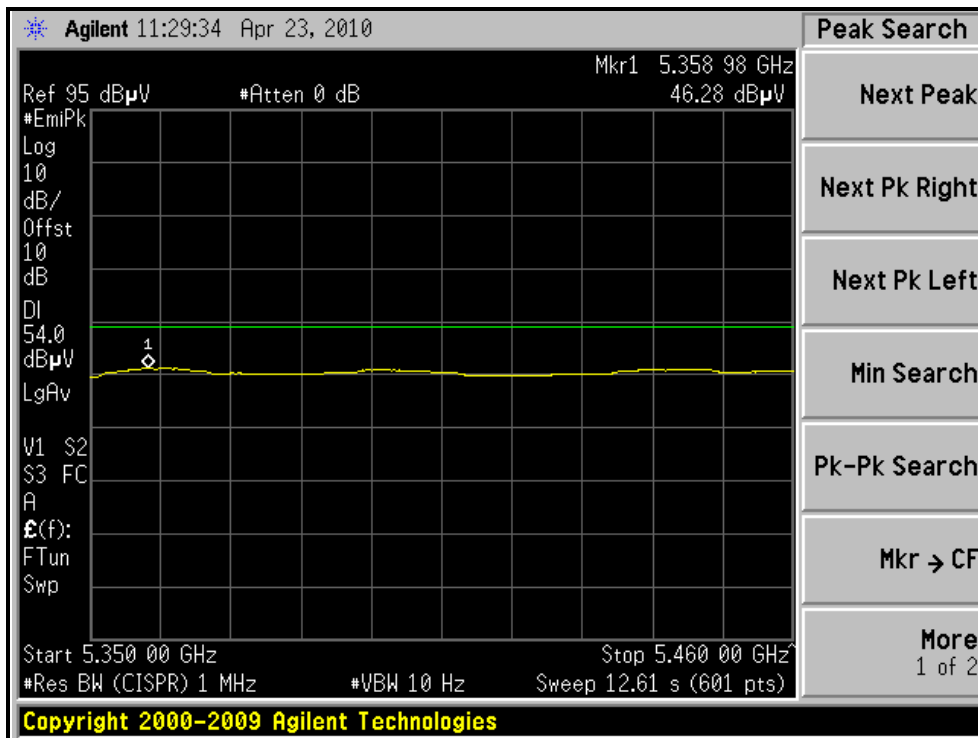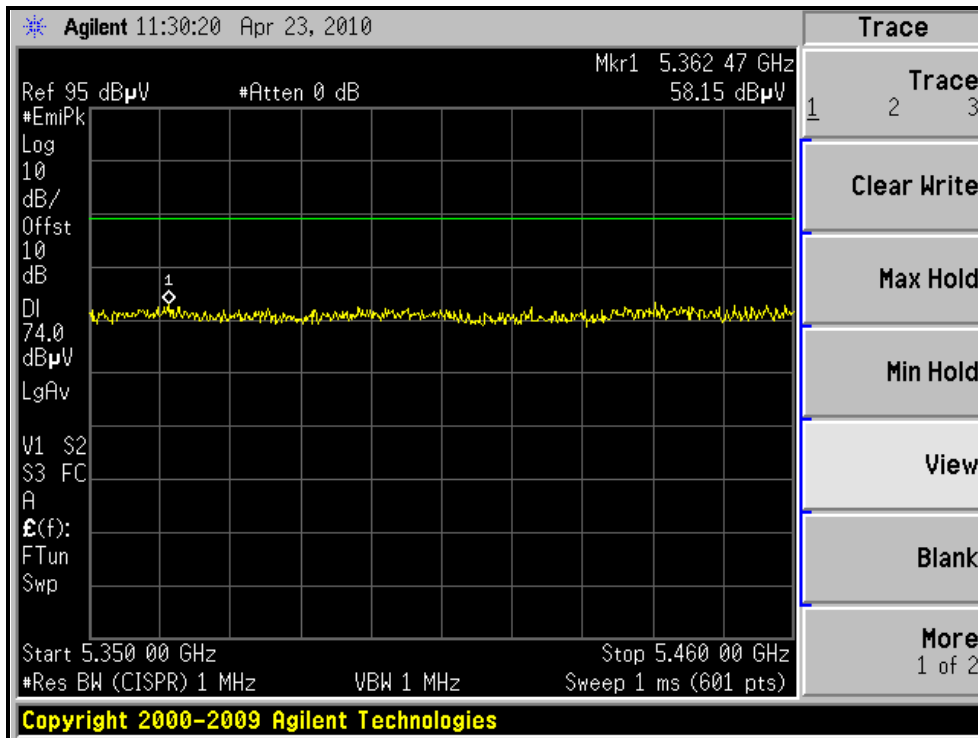



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5128.30	57.5 PK	74.0	-16.6	1.25 H	334	21.48	35.97
2	5128.30	44.4 AV	54.0	-9.6	1.25 H	334	8.43	35.97
3	*5180.00	98.3 PK			1.25 H	334	62.26	36.05
4	*5180.00	89.3 AV			1.25 H	334	53.20	36.05
5	#10360.00	55.7 PK	68.3	-12.6	1.61 H	48	9.77	45.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5128.00	58.3 PK	74.0	-15.7	1.24 V	327	22.31	35.96
2	5128.00	48.8 AV	54.0	-5.2	1.24 V	327	12.85	35.96
3	*5180.00	110.3 PK			1.00 V	318	74.27	36.05
4	*5180.00	102.6 AV			1.00 V	318	66.53	36.05
5	#10360.00	53.7 PK	68.3	-14.6	1.33 V	141	7.81	45.92
6	15540.00	55.8 PK	74.0	-18.3	1.20 V	285	7.82	47.93
7	15540.00	43.6 AV	54.0	-10.4	1.20 V	285	-4.30	47.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	97.9 PK			1.12 H	332	61.86	36.08
2	*5200.00	88.9 AV			1.12 H	332	52.77	36.08
3	#10400.00	55.7 PK	68.3	-12.6	1.48 H	301	9.74	45.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	113.4 PK			1.08 V	301	77.28	36.08
2	*5200.00	104.5 AV			1.08 V	301	68.45	36.08
3	#10400.00	58.3 PK	68.3	-10.1	1.44 V	169	12.26	45.99
4	15600.00	56.7 PK	74.0	-17.3	1.21 V	104	8.96	47.78
5	15600.00	44.2 AV	54.0	-9.8	1.21 V	104	-3.55	47.78

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	98.1 PK			1.11 H	334	61.92	36.14
2	*5240.00	88.9 AV			1.11 H	334	52.75	36.14
3	5455.60	58.1 PK	74.0	-15.9	1.11 H	333	21.59	36.49
4	5455.60	45.1 AV	54.0	-8.9	1.11 H	333	8.58	36.49
5	#10480.00	55.9 PK	68.3	-12.4	1.50 H	265	9.75	46.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.3 PK			1.18 V	301	76.11	36.14
2	*5240.00	103.6 AV			1.18 V	301	67.43	36.14
3	5358.07	60.0 PK	74.0	-14.0	1.08 V	52	23.64	36.33
4	5358.07	47.2 AV	54.0	-6.8	1.08 V	52	10.91	36.33
5	#10480.00	59.5 PK	68.3	-8.8	1.57 V	172	13.34	46.12
6	15720.00	55.9 PK	74.0	-18.1	1.22 V	0	8.44	47.48
7	15720.00	43.7 AV	54.0	-10.3	1.22 V	0	-3.78	47.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, HORIZONTAL)

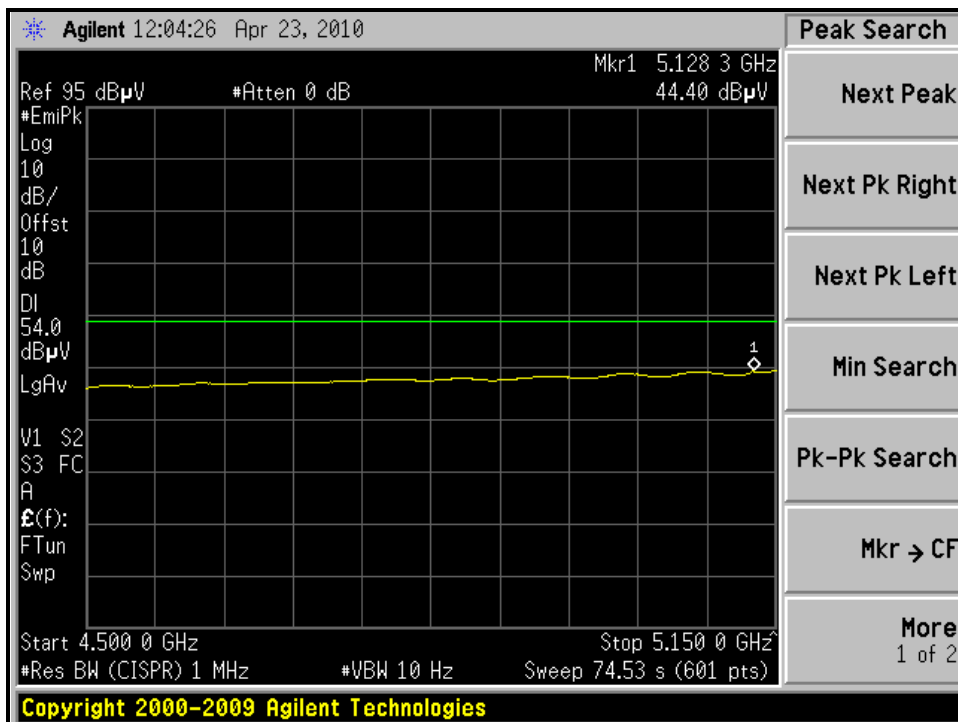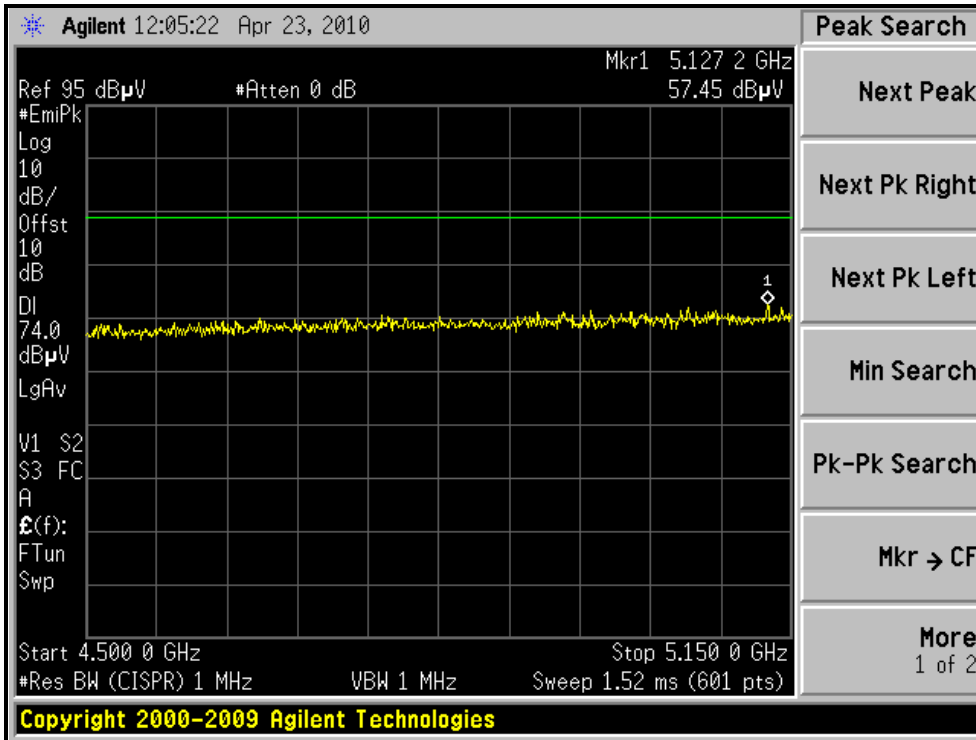



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, VERTICAL)

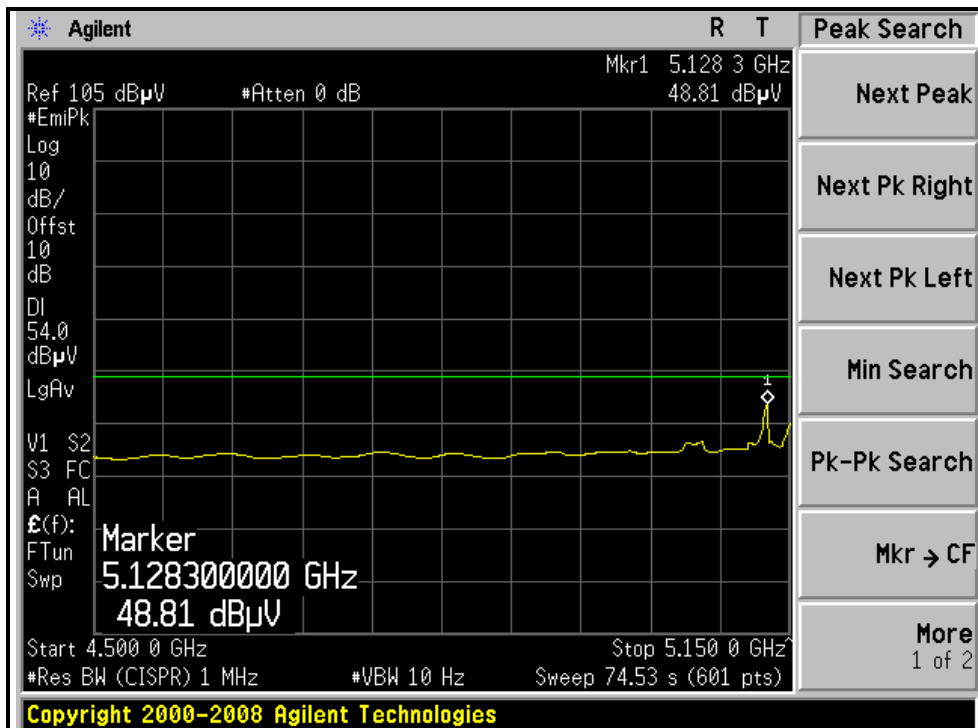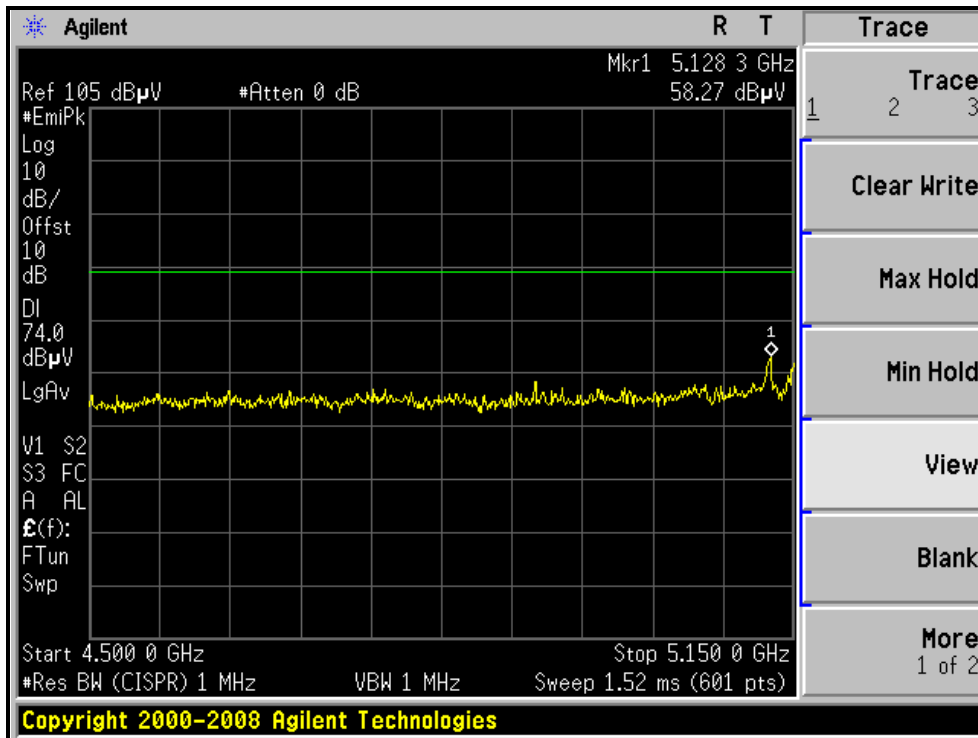



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, HORIZONTAL)

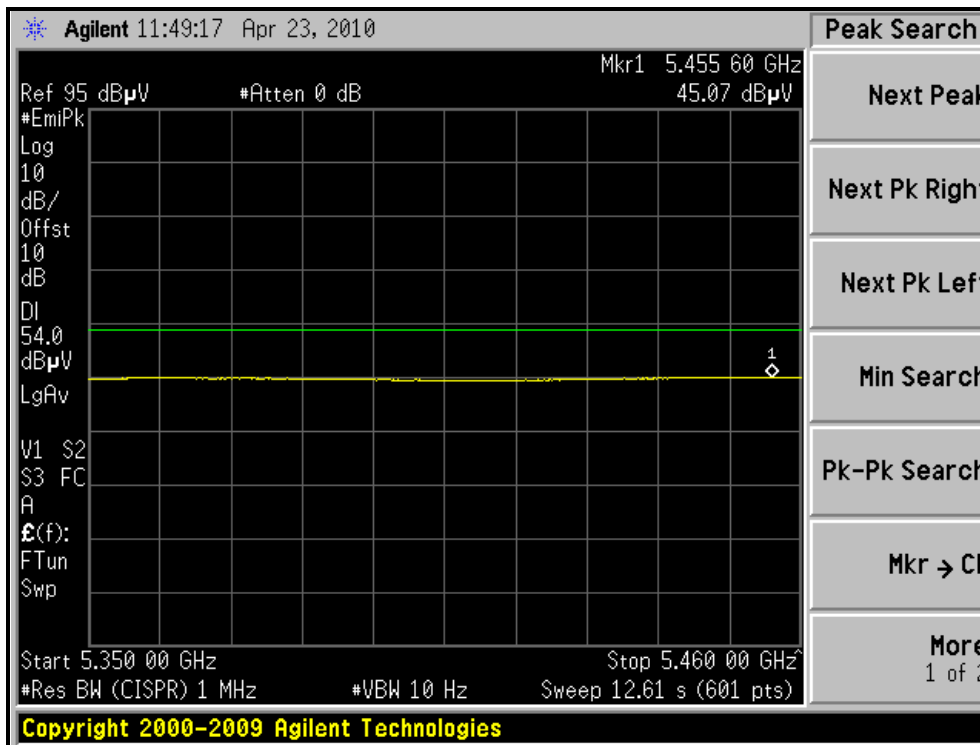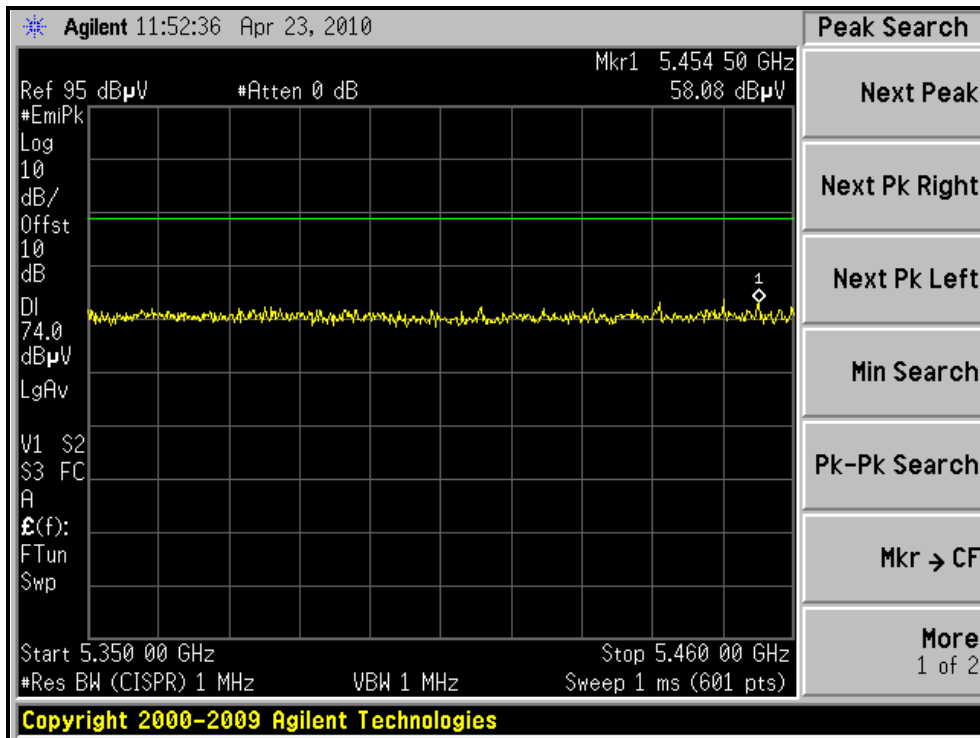



A D T

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, VERTICAL)

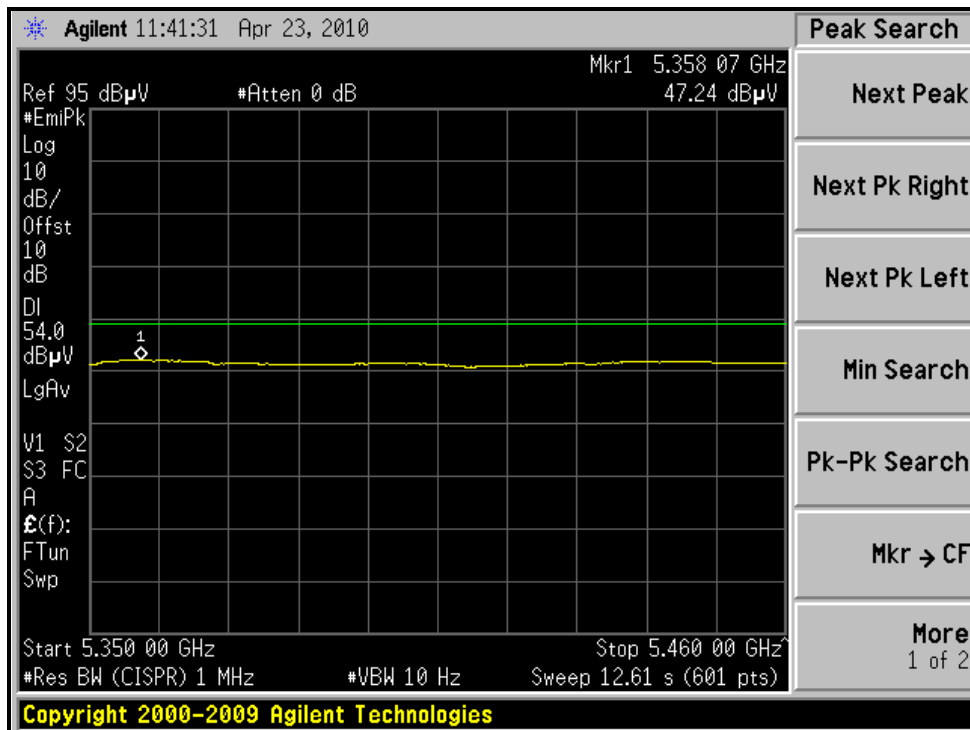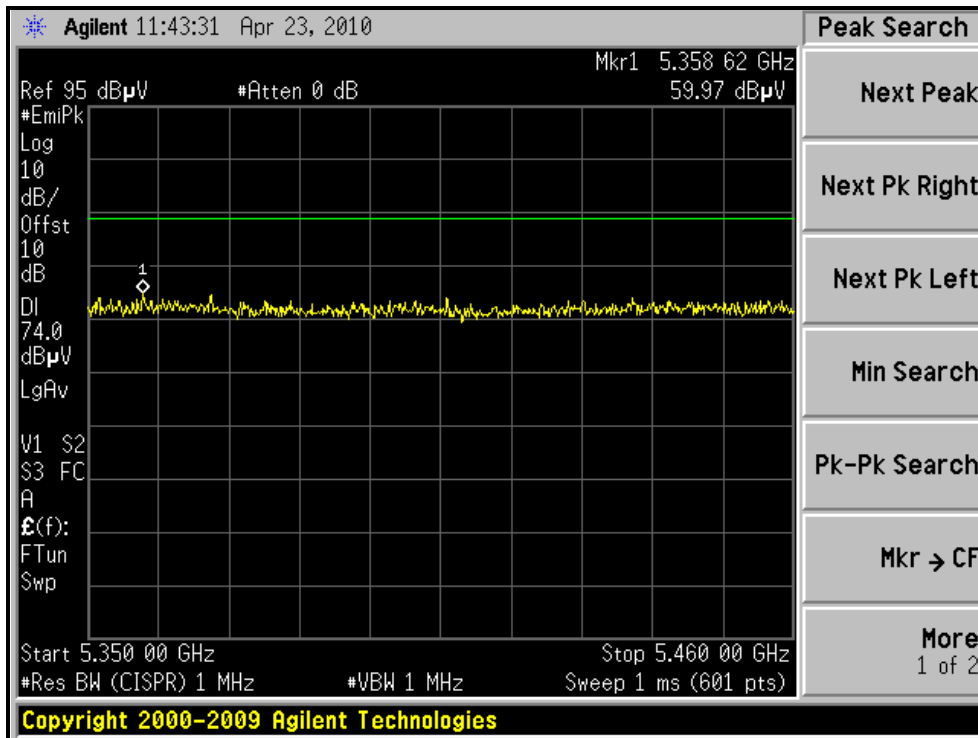



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.09 H	234	22.19	36.00
2	5150.00	46.0 AV	54.0	-8.0	1.09 H	234	10.00	36.00
3	*5190.00	93.7 PK			1.10 H	233	57.62	36.06
4	*5190.00	84.5 AV			1.10 H	233	48.41	36.06
5	10380.00	58.1 PK	68.3	-10.2	1.09 H	57	12.16	45.95
6	15570.00	62.7 PK	74.0	-11.3	1.48 H	62	14.85	47.85
7	15570.00	49.8 AV	54.0	-4.2	1.48 H	62	1.91	47.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.45 V	12	29.70	36.00
2	5150.00	53.3 AV	54.0	-0.7	1.45 V	12	17.28	36.00
3	*5190.00	105.6 PK			1.46 V	10	69.56	36.06
4	*5190.00	96.5 AV			1.46 V	10	60.39	36.06
5	10380.00	55.3 PK	68.3	-13.0	1.41 V	24	9.36	45.95

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH 1014 hPa	TESTED BY	Phoenix Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	98.7 PK			1.07 H	260	62.61	36.13
2	*5230.00	88.9 AV			1.07 H	260	52.78	36.13
3	5350.00	57.0 PK	74.0	-17.0	1.67 H	111	20.65	36.32
4	5350.00	45.1 AV	54.0	-8.9	1.67 H	111	8.79	36.32
5	#10460.00	58.3 PK	68.3	-10.0	1.43 H	67	12.18	46.09
6	15690.00	63.1 PK	74.0	-10.9	1.52 H	105	15.55	47.56
7	15690.00	50.0 AV	54.0	-4.0	1.52 H	105	2.43	47.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	112.1 PK			1.31 V	25	75.92	36.13
2	*5230.00	103.1 AV			1.31 V	25	66.97	36.13
3	5350.00	58.0 PK	74.0	-16.0	1.11 V	69	21.67	36.32
4	5350.00	45.1 AV	54.0	-8.9	1.11 V	69	8.82	36.32
5	#10460.00	56.2 PK	68.3	-12.1	1.69 V	231	10.11	46.09

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH38, HORIZONTAL)

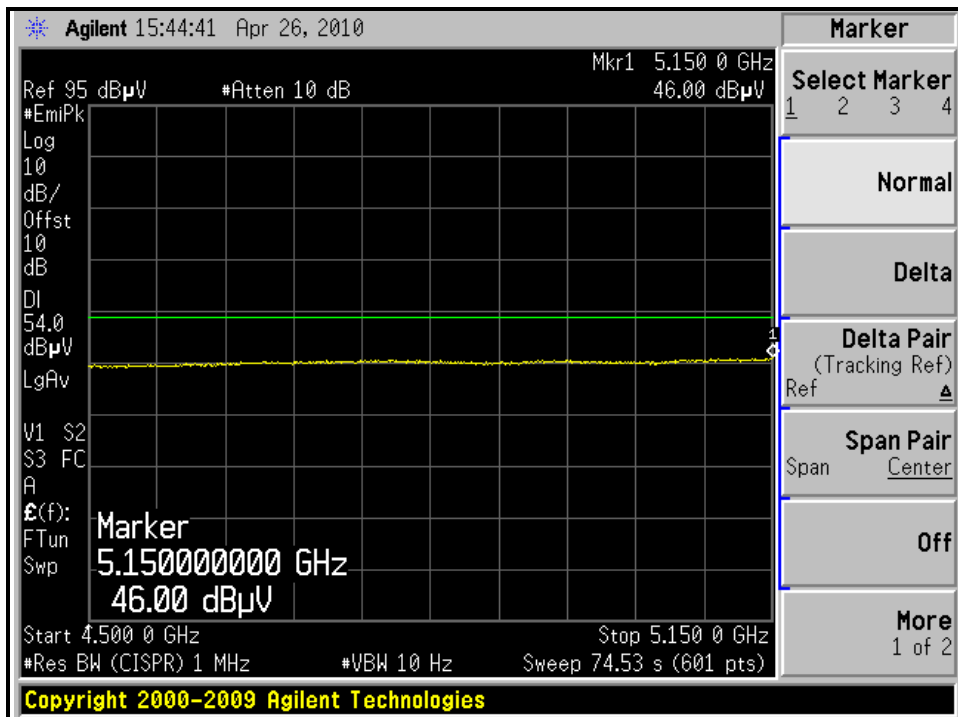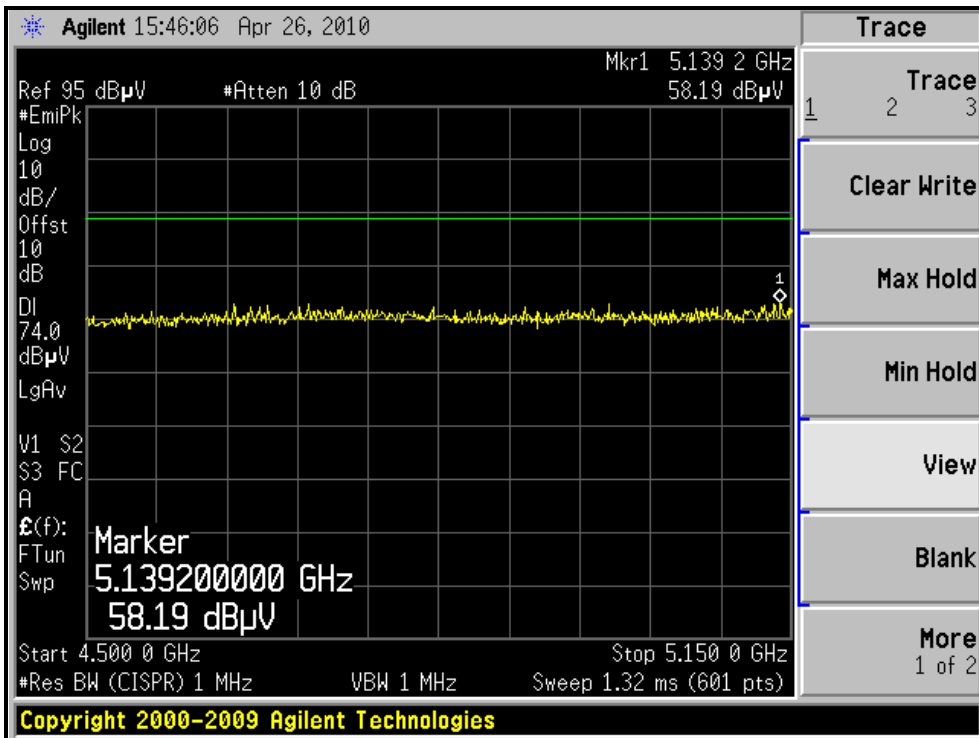



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH38, VERTICAL)

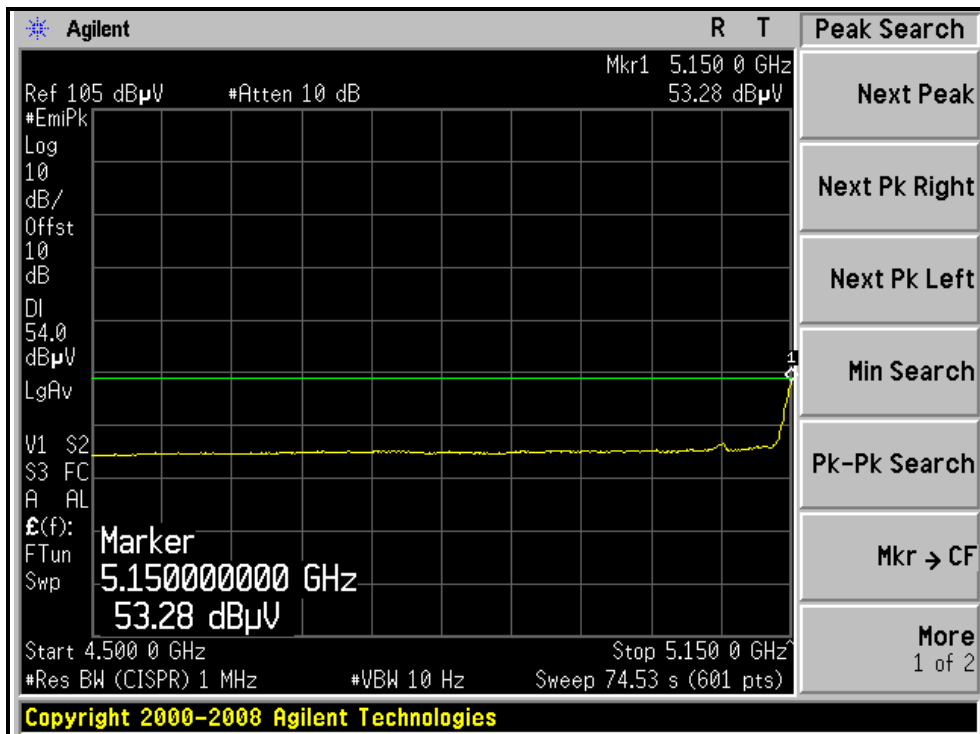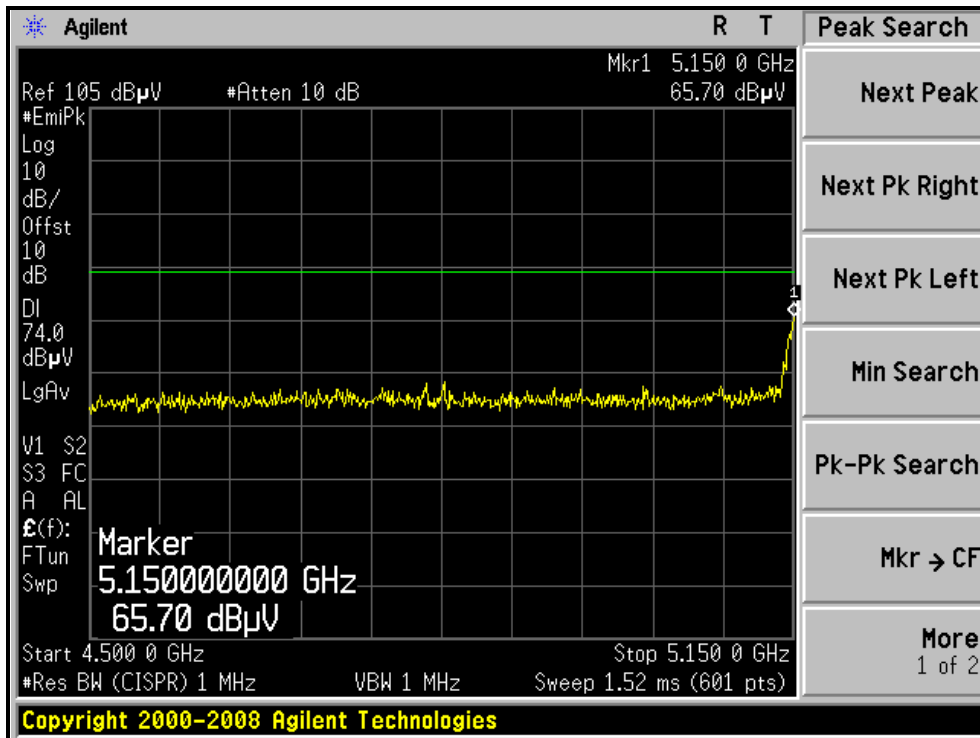



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, HORIZONTAL)

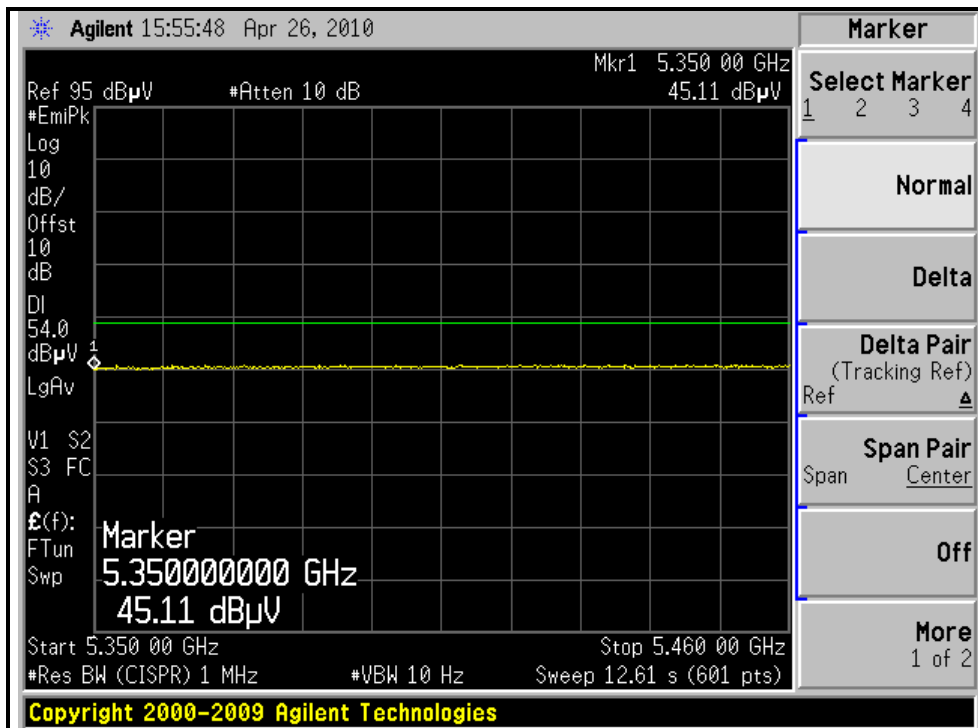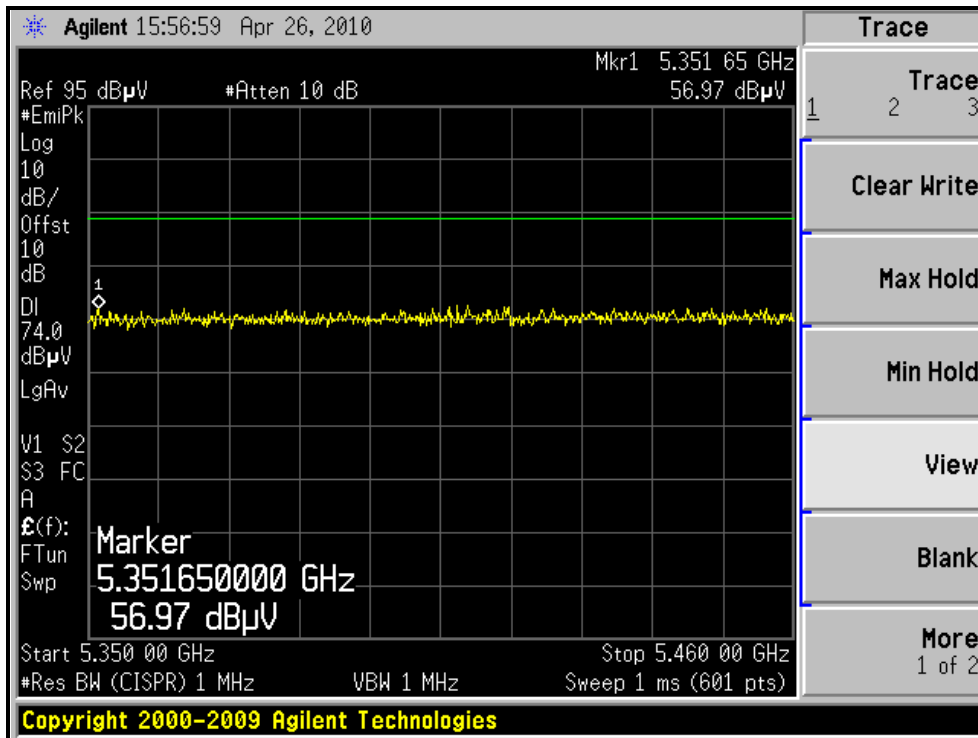



A D T

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, VERTICAL)

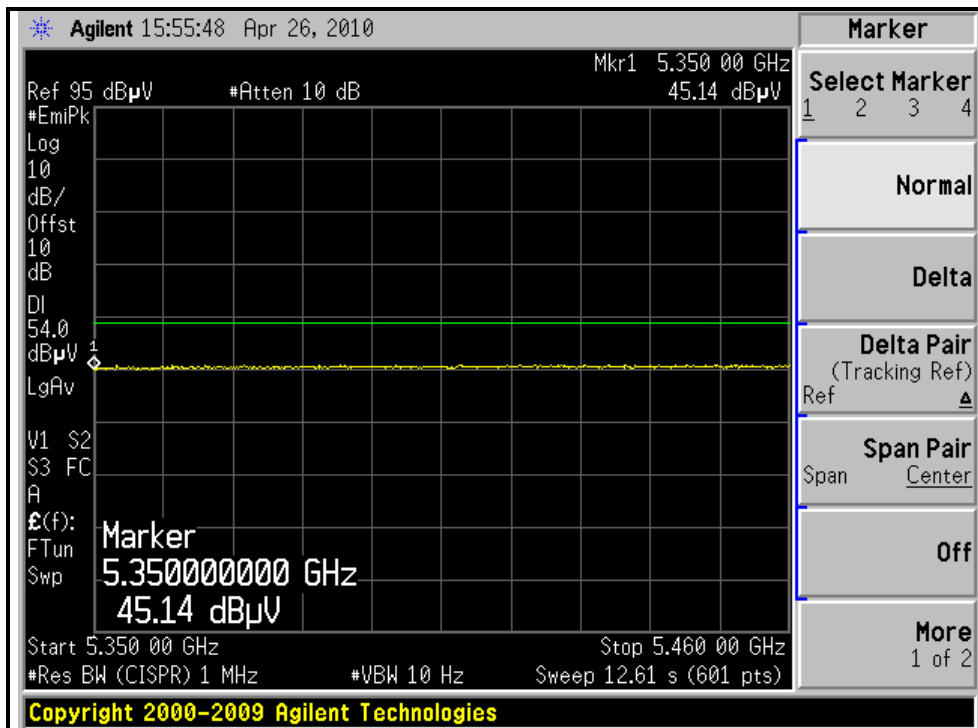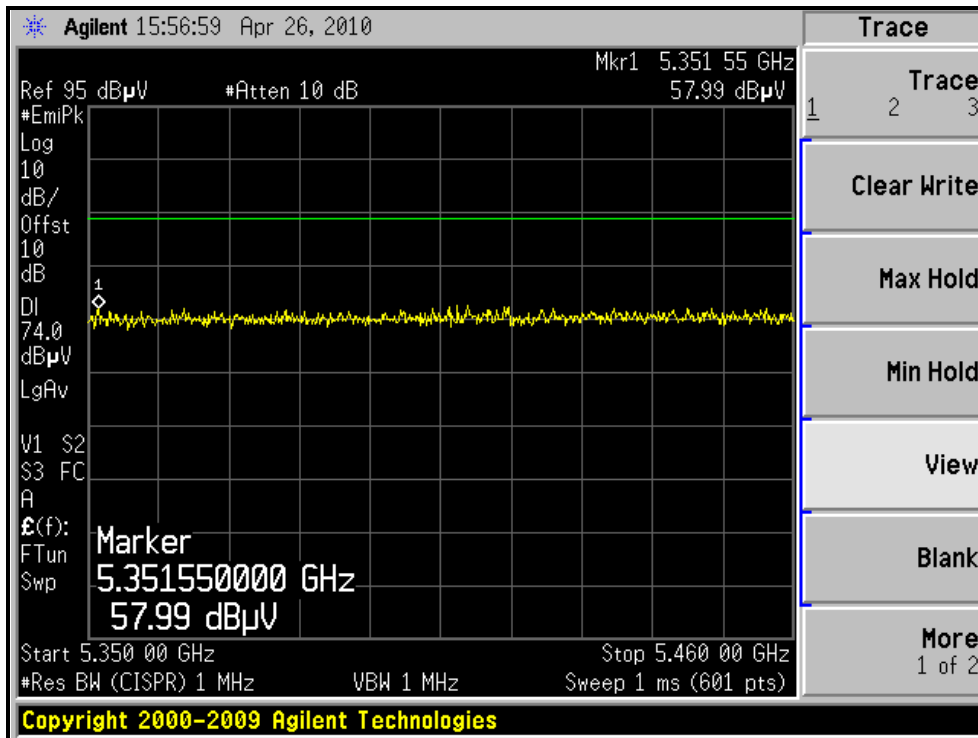

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	Sep. 21, 2009	Sep. 20, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 3MHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T


4.3.7 TEST RESULTS

802.11a OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
36	5180	13.9	24.5	17.0	25.5	PASS
40	5200	14.7	29.5	17.0	26.0	PASS
48	5240	14.4	27.5	17.0	25.42	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following page.

Peak Power Output: CH40

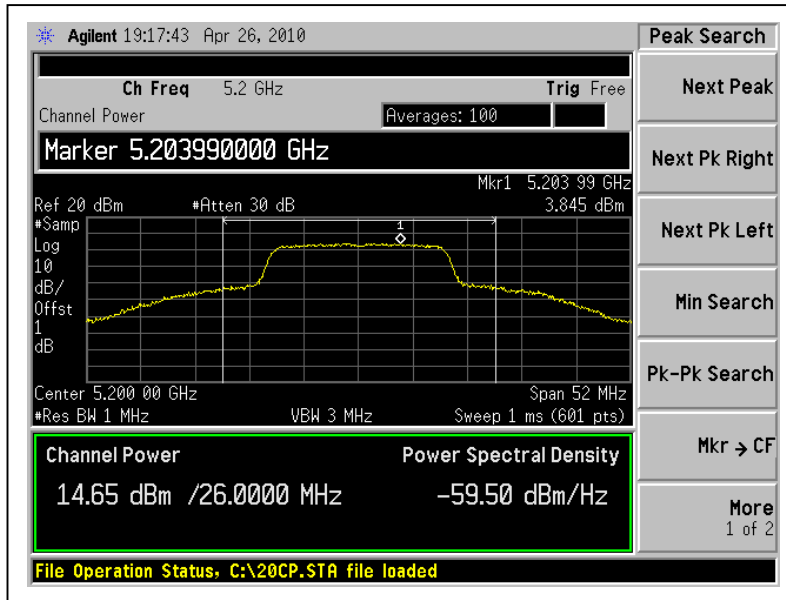

26dB Occupied Bandwidth: CH40

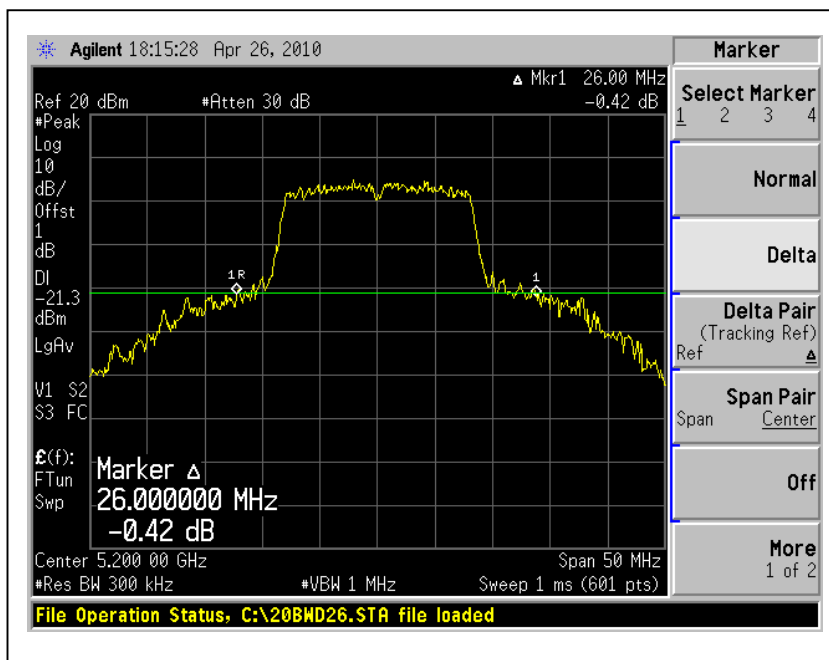



A D T

802.11n (20MHz) OFDM modulation:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (dBm)	TOTAL PEAK POWER (mW)	PEAK POWER LIMIT (DBM)	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
		Chain 0	Chain 1					
36	5180	11.4	11.2	14.3	27.0	17.0	25.42	PASS
40	5200	11.4	11.2	14.3	27.0	17.0	25.25	PASS
48	5240	11.5	11.5	14.5	28.3	17.0	22.33	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following page.




A D T

Peak Power Output: For Chain (1) :CH48

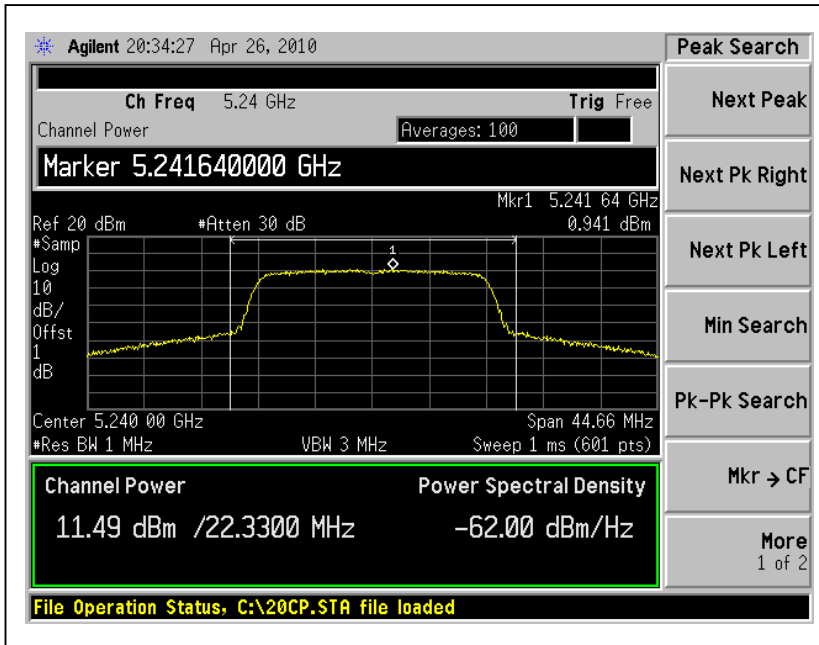

26dB Occupied Bandwidth: CH36

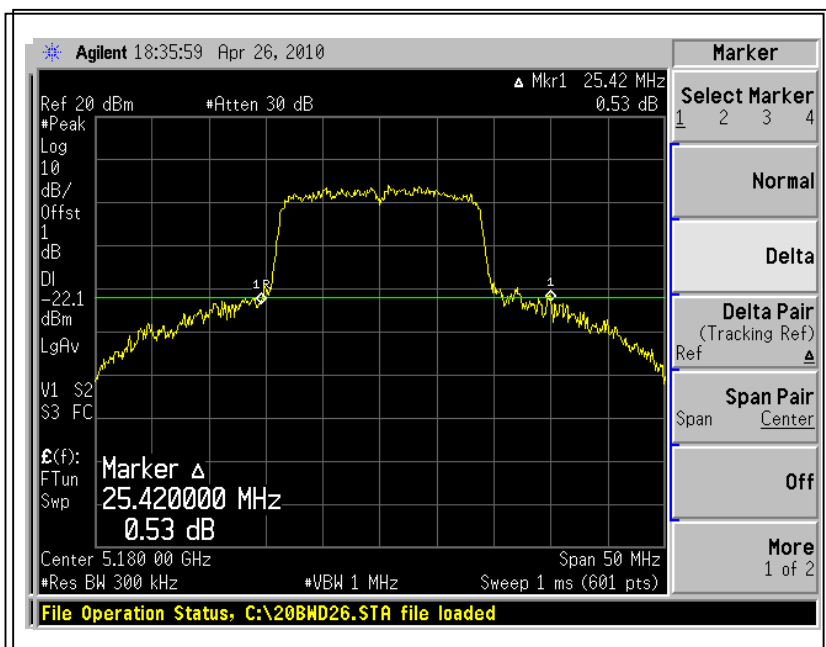



802.11n (40MHz) OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (dBm)	TOTAL PEAK POWER (mW)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
		Chain 0	Chain 1					
38	5190	12.0	11.7	14.9	30.6	17.0	39.33	PASS
46	5230	13.9	13.5	16.7	46.9	17.0	39.17	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following page.




A D T

Peak Power Output: For Chain (0) :CH46

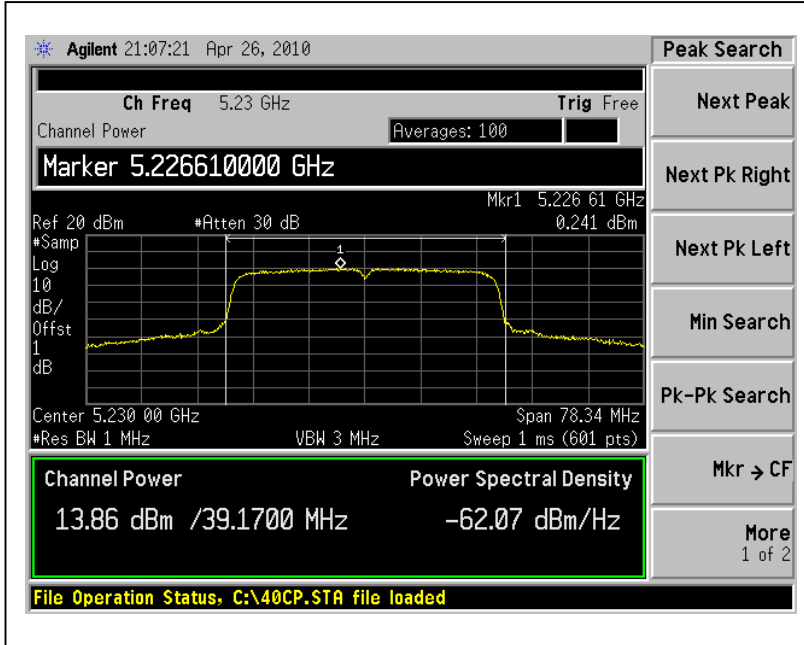

26dB Occupied Bandwidth: CH38

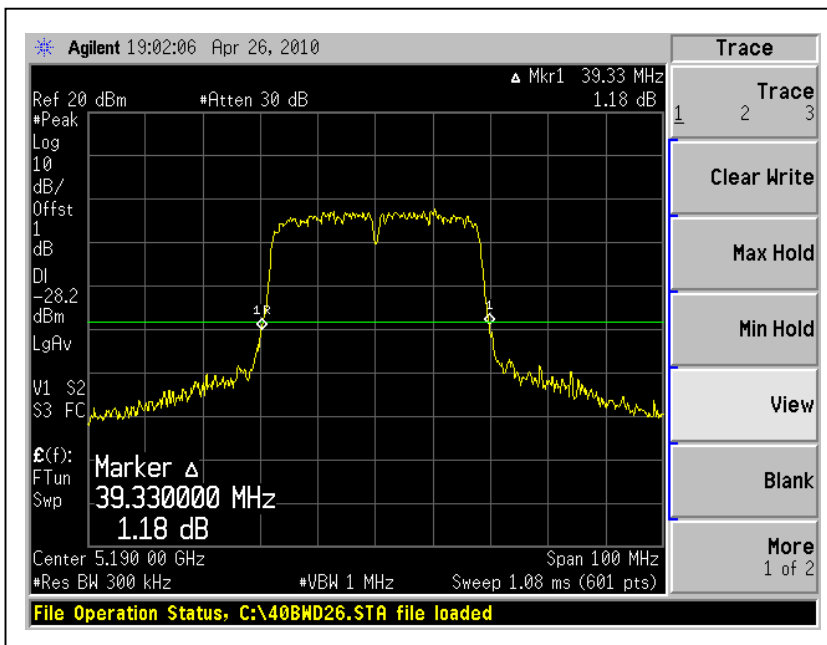



A D T

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.47 – 5.725GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	Sep. 21, 2009	Sep. 20, 2010

NOTE:

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4.7 TEST RESULTS

802.11a OFDM modulation

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	7.8	13	PASS
40	5200	7.3	13	PASS
48	5240	6.8	13	PASS

CH36

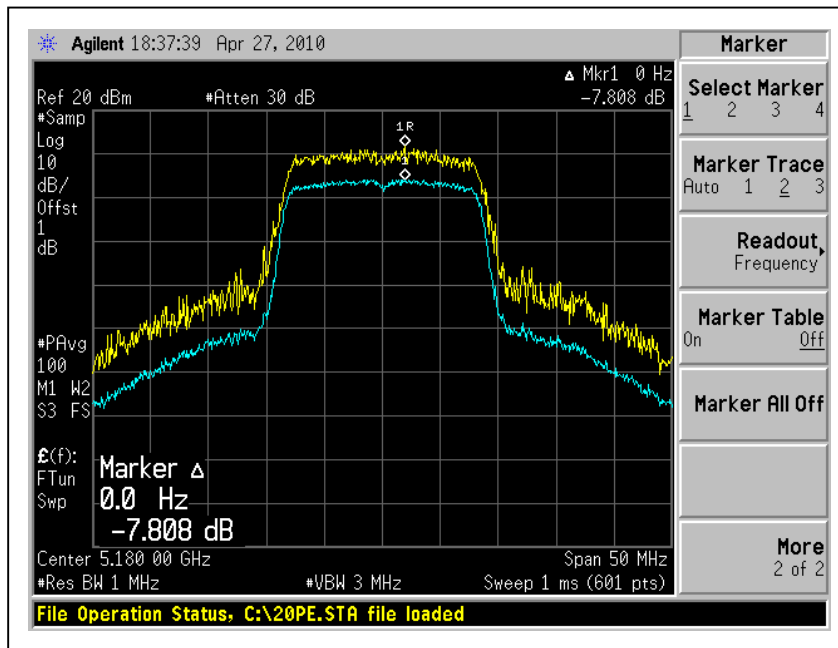




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	7.6	13	PASS
40	5200	7.1	13	PASS
48	5240	7.9	13	PASS

CH48

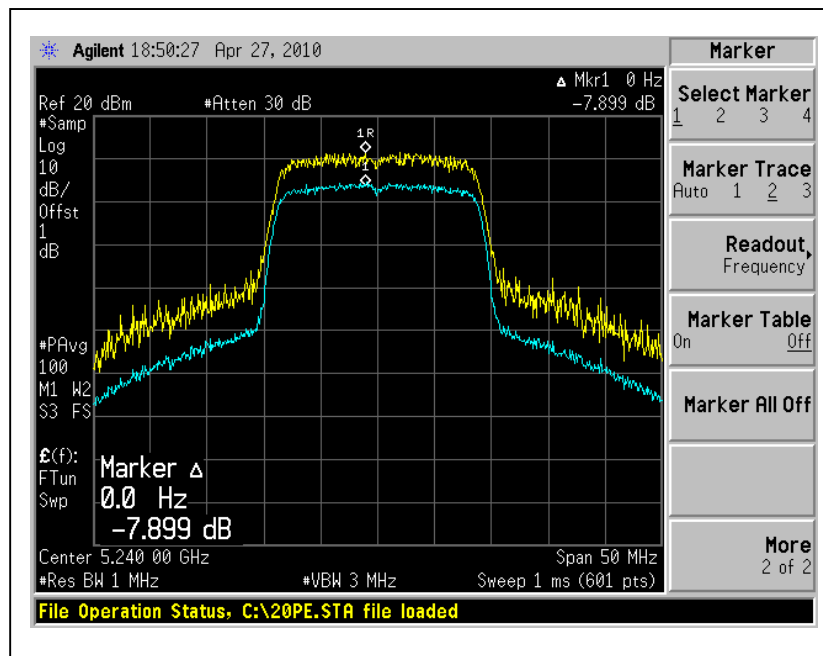




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
38	5190	7.6	13	PASS
46	5230	7.7	13	PASS

CH46

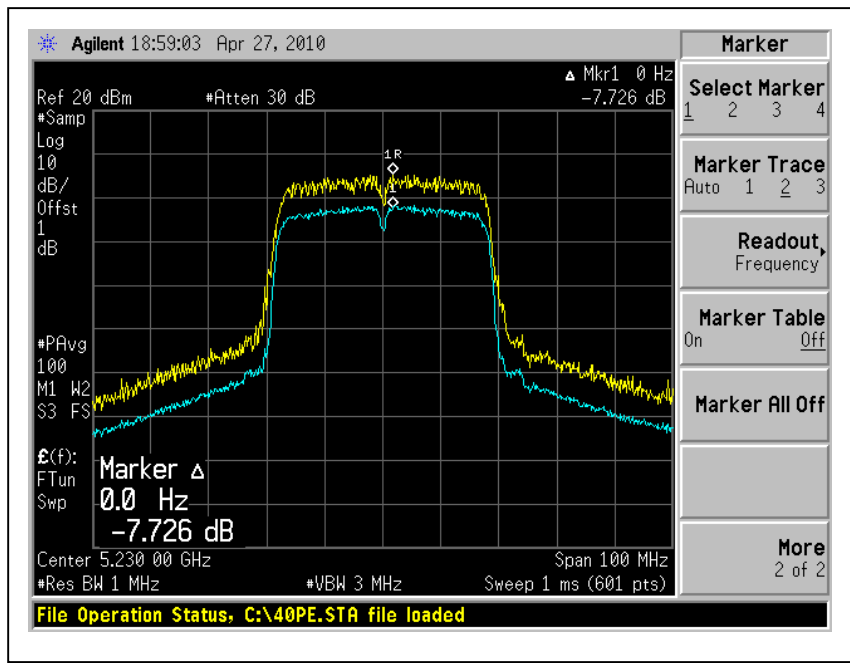



A D T

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 ~ 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	Sep. 21, 2009	Sep. 20, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




A D T

4.5.7 TEST RESULTS

802.11a OFDM modulation

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	3.6	4	PASS
40	5200	3.8	4	PASS
48	5240	3.9	4	PASS

CH48

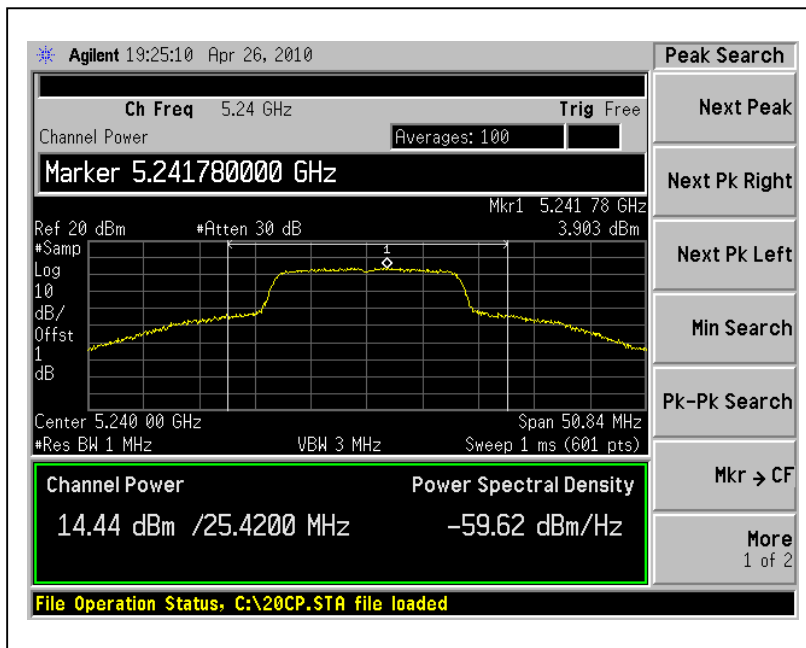




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL OUTPUT POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
		Chain (0)	Chain(1)			
36	5180	0.5	0.4	3.5	4	PASS
40	5200	0.8	0.5	3.7	4	PASS
48	5240	0.6	0.9	3.8	4	PASS

For Chain (1) : CH48

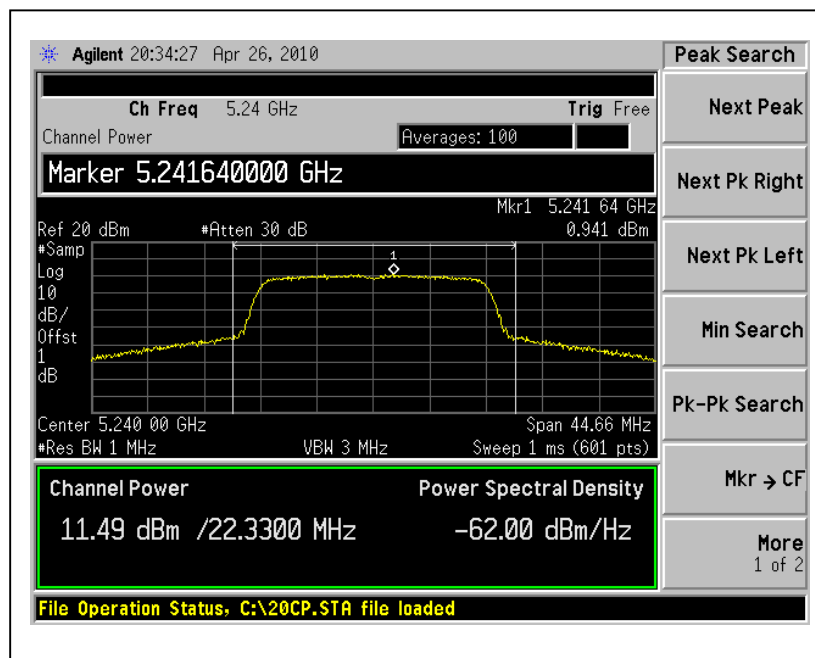




A D T

802.11n (40MHz) OFDM modulation:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL OUTPUT POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
		Chain (0)	Chain(1)			
38	5190	-1.7	-2.0	1.2	4	PASS
46	5230	0.2	0.0	3.1	4	PASS

For Chain (0) : CH46

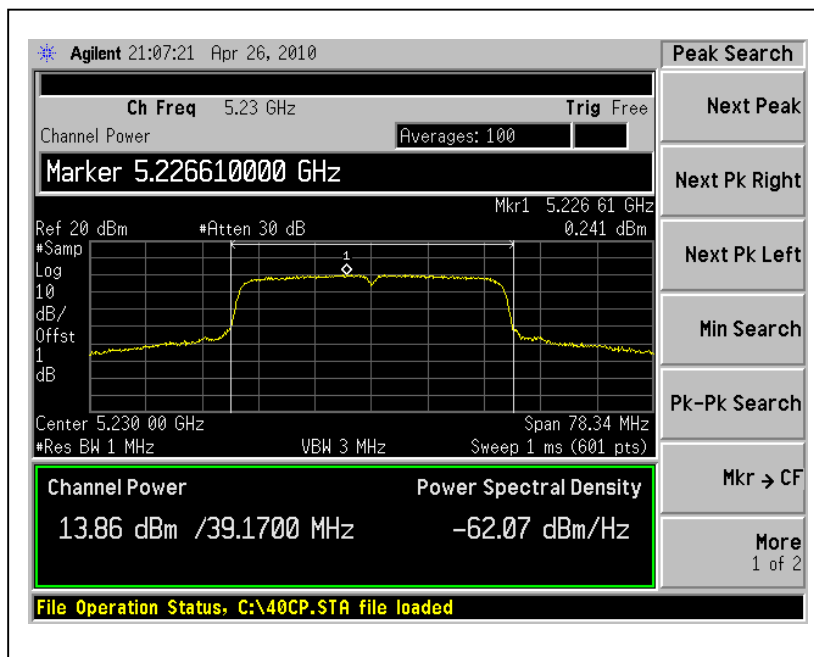



A D T

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

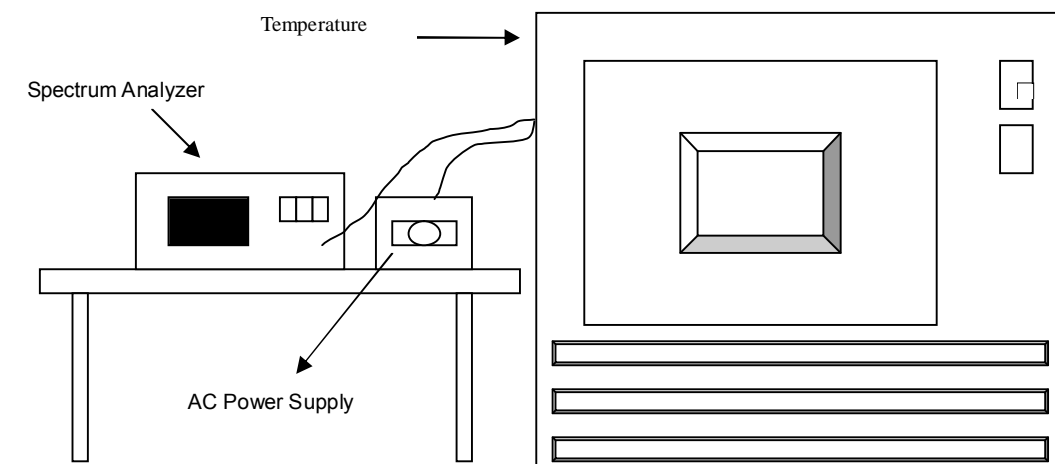

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.6.7 TEST RESULTS

		Operating frequency: 5180MHz				Limit : $\pm 0.02\%$	
Temp. (°C)	Power supply (VAC)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	138	5240.0268	0.000511	5240.0253	0.000483	5240.0231	0.000441
	120	5240.0266	0.000508	5240.0273	0.000521	5240.0251	0.000479
	102	5240.0266	0.000508	5240.0243	0.000464	5240.0231	0.000441
40	138	5240.0326	0.000622	5240.033	0.000630	5240.0329	0.000628
	120	5240.0326	0.000622	5240.0329	0.000628	5240.0329	0.000628
	102	5240.0328	0.000626	5240.0327	0.000624	5240.0329	0.000628
30	138	5240.0078	0.000149	5240.0074	0.000141	5240.0069	0.000132
	120	5240.0078	0.000149	5240.0076	0.000145	5240.0072	0.000137
	102	5240.0078	0.000149	5240.0074	0.000141	5240.0069	0.000132
20	138	5239.9884	0.000221	5239.9882	0.000225	5239.9878	0.000233
	120	5239.9884	0.000221	5239.9884	0.000221	5239.9879	0.000231
	102	5239.9884	0.000221	5239.9882	0.000225	5239.9877	0.000235
10	138	5240.0262	0.000500	5240.0213	0.000406	5240.0171	0.000326
	120	5240.0262	0.000500	5240.0243	0.000464	5240.0201	0.000384
	102	5240.0262	0.000500	5240.0203	0.000387	5240.0181	0.000345
0	138	5240.0086	0.000164	5240.0085	0.000162	5240.0080	0.000153
	120	5240.0086	0.000164	5240.0085	0.000162	5240.0082	0.000156
	102	5240.0086	0.000164	5240.0084	0.000160	5240.0079	0.000151
-10	138	5240.0033	0.000063	5240.0031	0.000059	5240.0026	0.000050
	120	5240.0034	0.000065	5240.0035	0.000067	5240.0030	0.000057
	102	5240.0033	0.000063	5240.0031	0.000059	5240.0026	0.000050
-20	138	5240.0192	0.000366	5240.0143	0.000273	5240.0141	0.000269
	120	5240.0192	0.000366	5240.0173	0.000330	5240.0151	0.000288
	102	5240.0172	0.000328	5240.0143	0.000273	5240.0141	0.000269
-30	138	5239.9843	0.000300	5239.9939	0.000116	5239.9934	0.000126
	120	5239.9844	0.000298	5239.9939	0.000116	5239.9936	0.000122
	102	5239.9943	0.000109	5239.9942	0.000111	5239.9933	0.000128



A D T

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For 5.15 to 5.25GHz band:


The spectrum plots (Peak RBW=1MHz, VBW=3MHz) are attached on the following pages.




A D T

802.11a OFDM modulation

CH 36

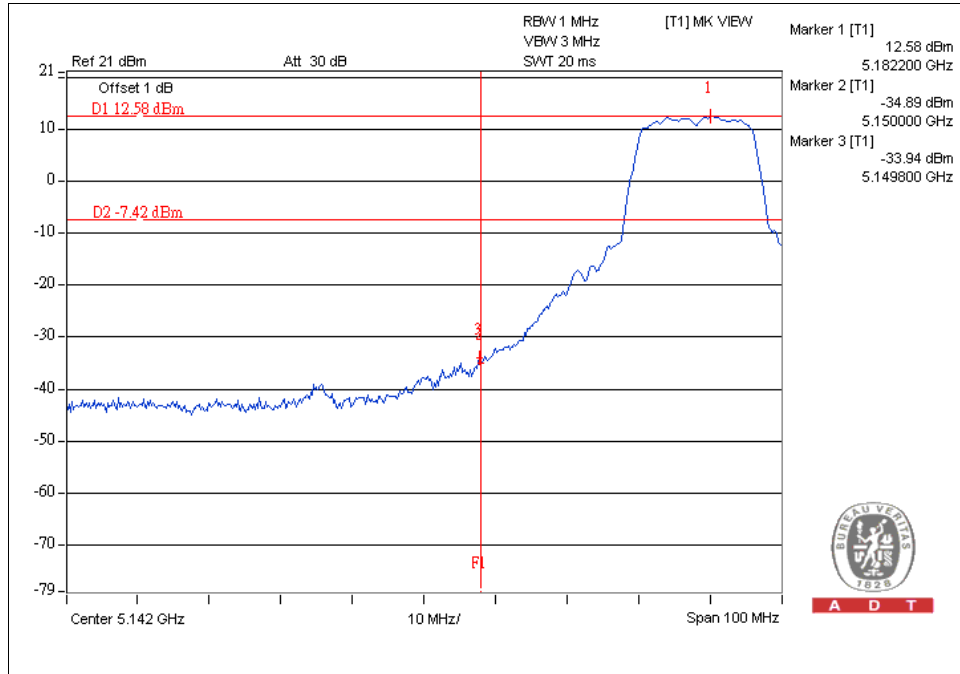


CH 48

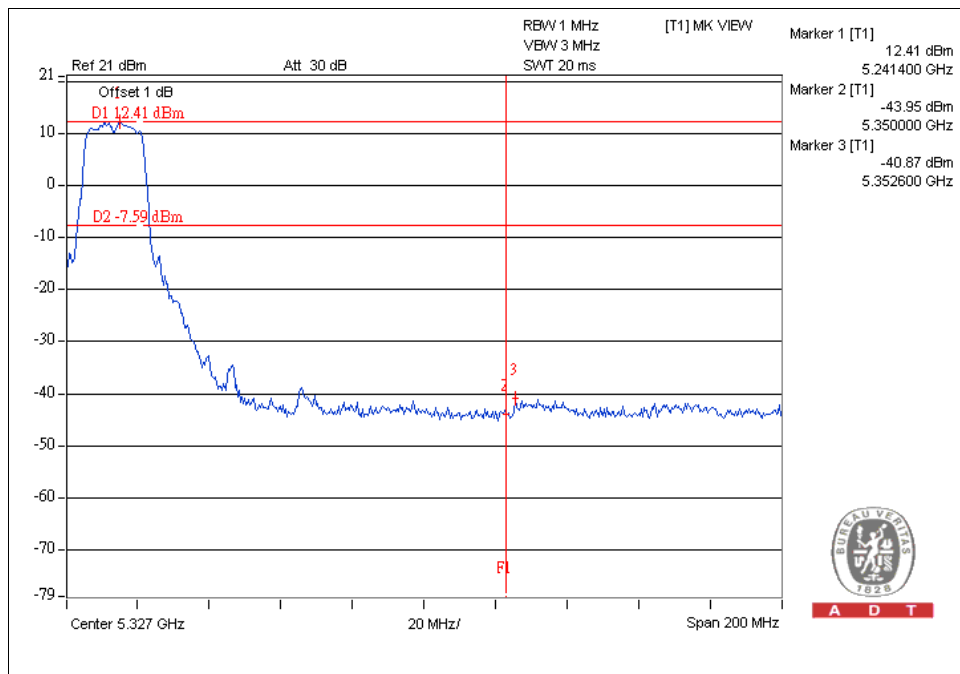




A D T

CH 36

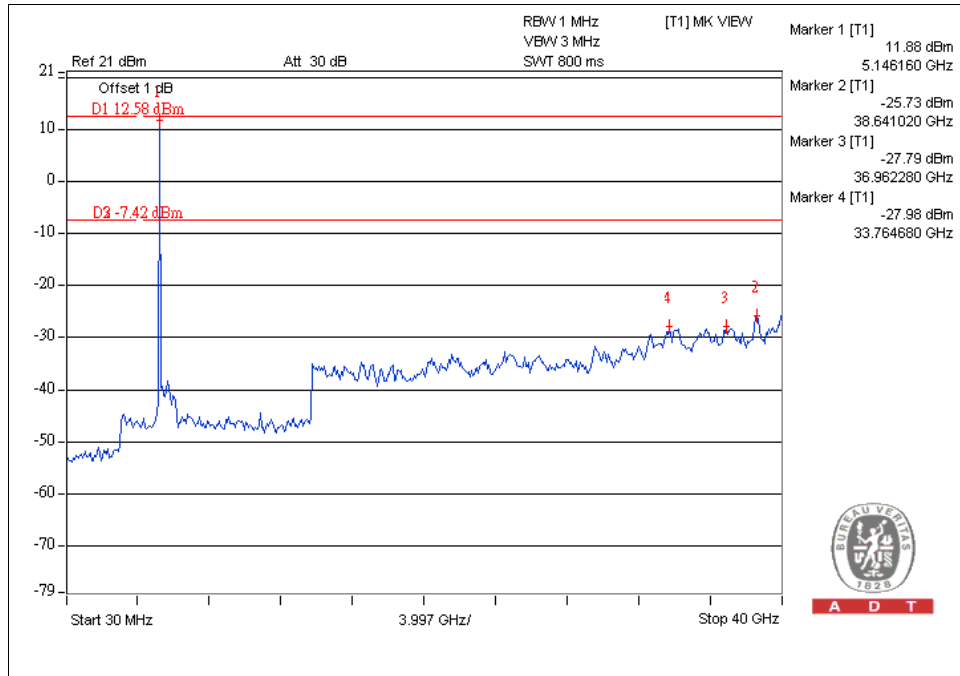


CH 48

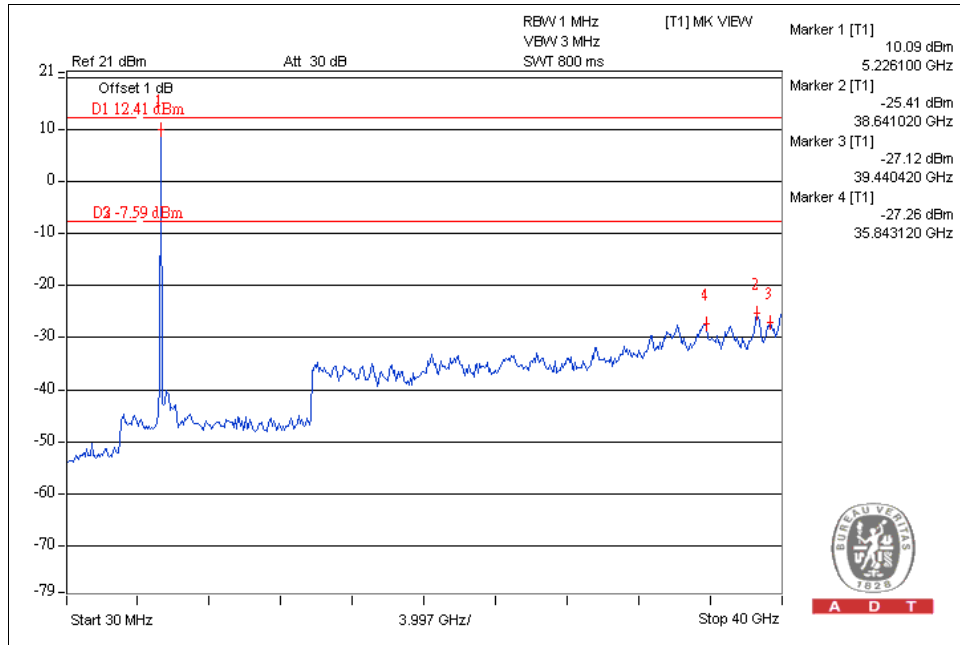


802.11n (20MHz) OFDM MODULATION:

CH36

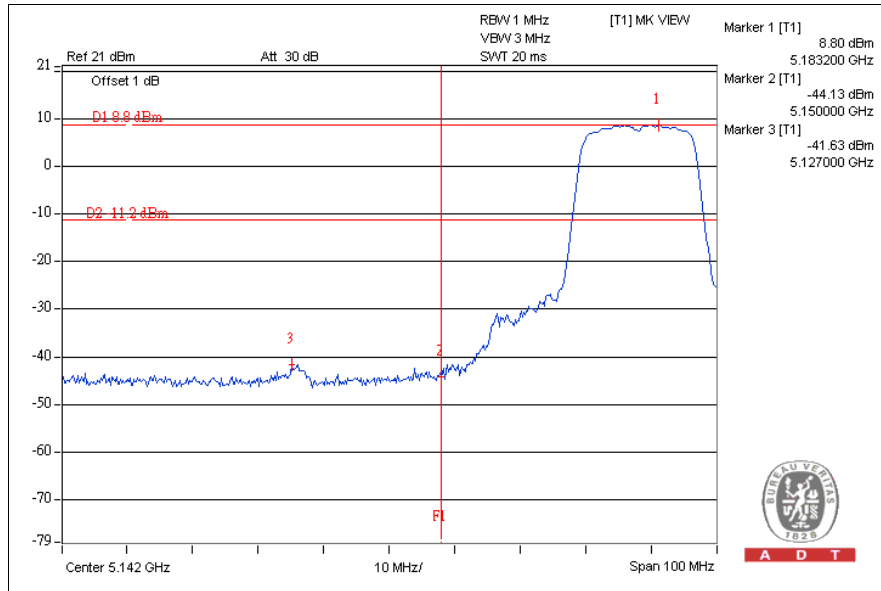


CH48

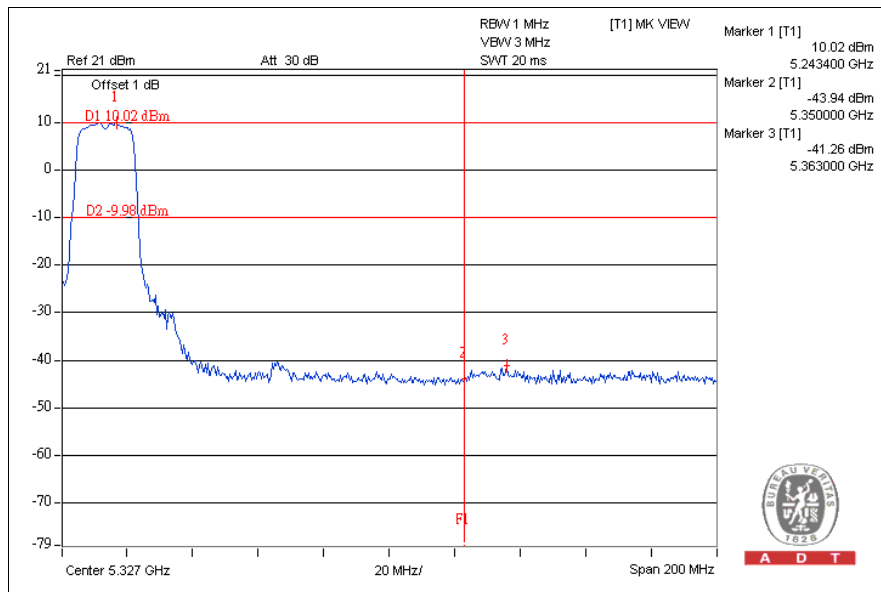




A D T

CH36

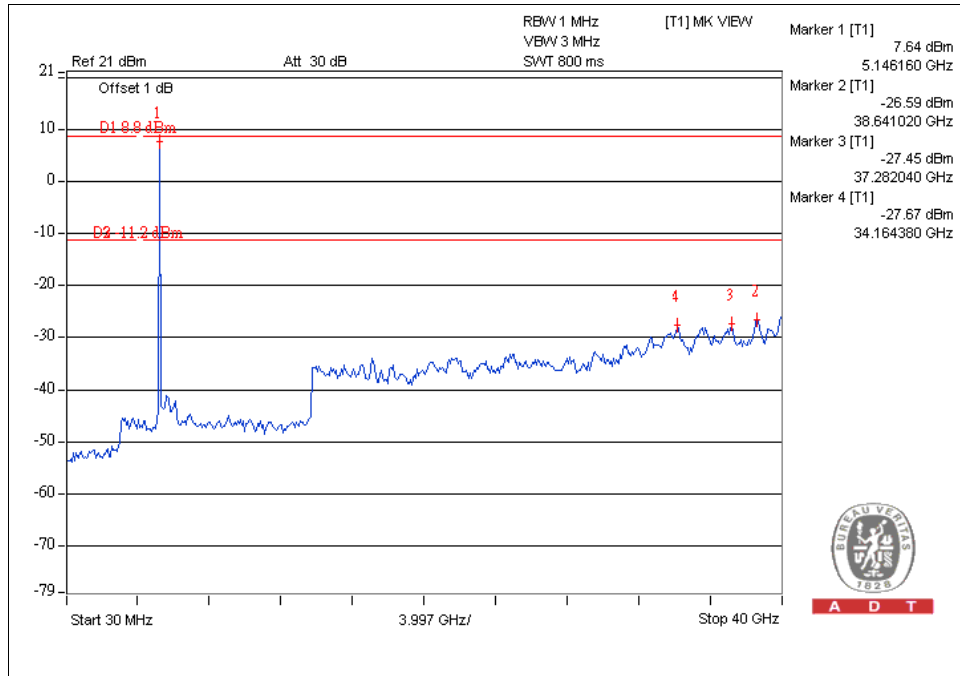


CH48

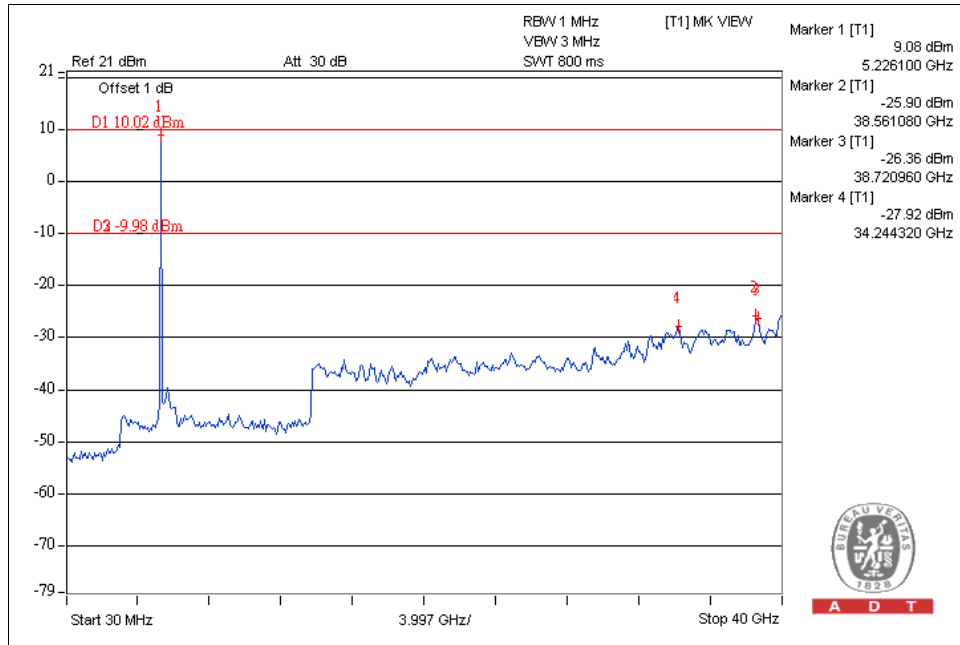


802.11n (40MHz) OFDM MODULATION:

CH38

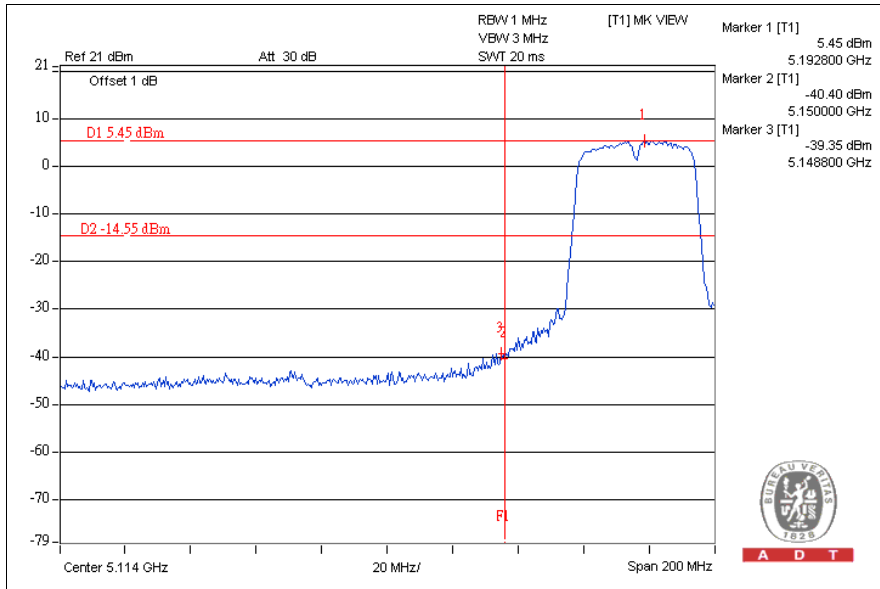


CH46

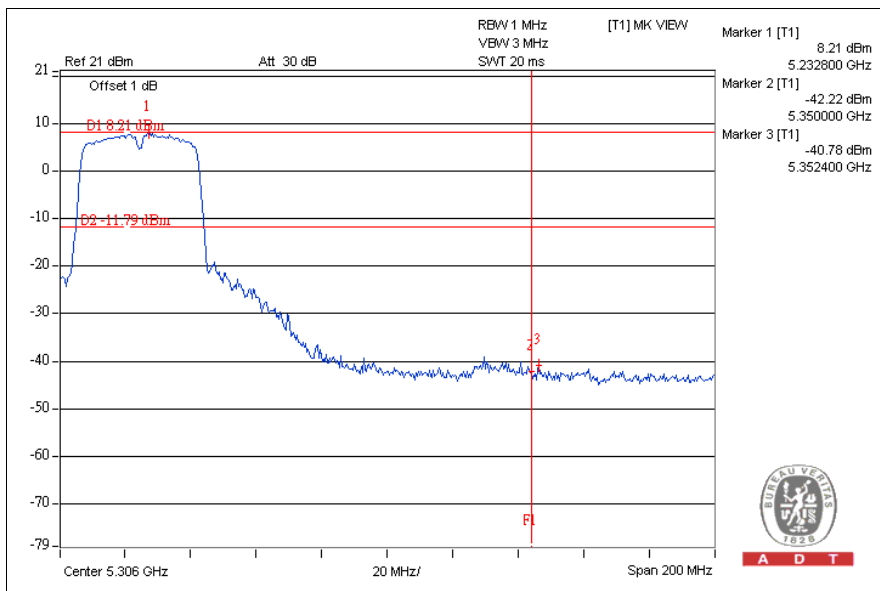




A D T

CH38

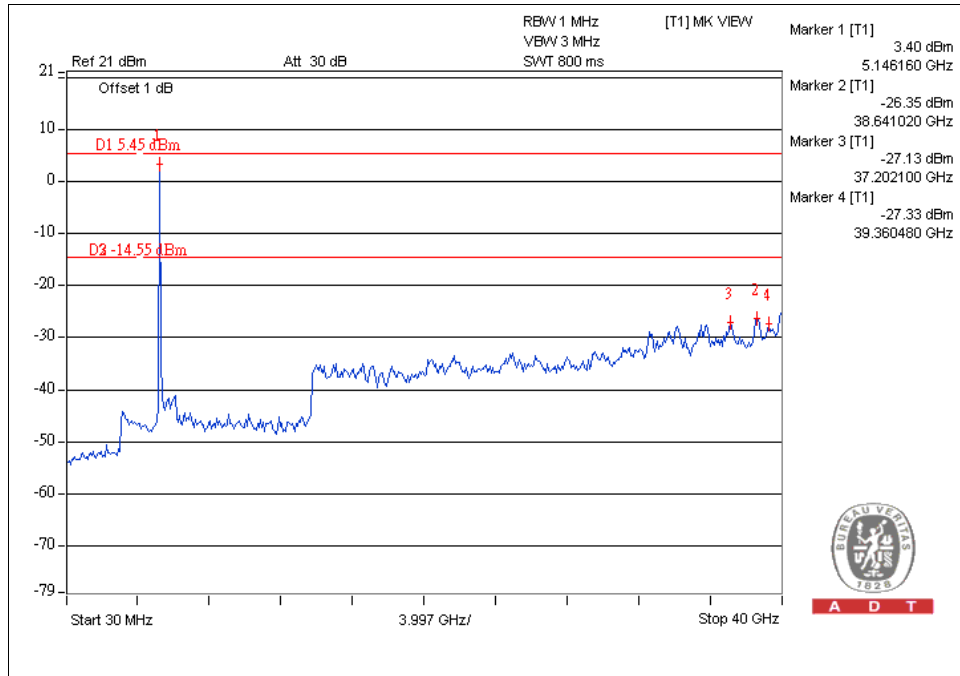

CH46

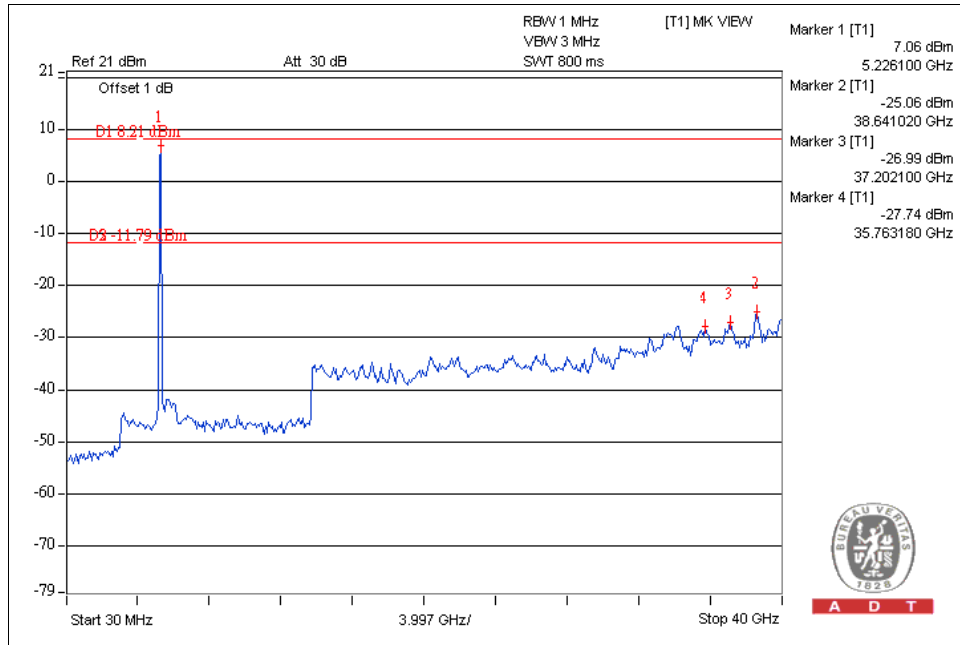



5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



A D T

6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---