



FCC Radio Test Report

FCC ID: KA2IR815C1

This report concerns (check one) : Original Grant Class I Change

Issued Date : Jul. 09, 2013
Project No. : 1301C210A
Equipment : Wireless router
Model Name : DIR-815
Applicant : D-LINK Corporation
Address : No.289, Sinhu 3rd Rd., Neihu District Taipei
City 114, Taiwan, R.O.C

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: May. 10, 2013

Date of Test: May. 10, 2013 ~ Jul. 08, 2013

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

Neutron Engineering Inc.

**No.3, Jinshagang 1st Road, ShiXia, Dalang
Town, Dong Guan, China.**

TEL : (0769) 8318-3000 FAX : (0769) 8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C., or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



| Table of Contents | Page |
|--|-------------|
| 1 . CERTIFICATION | 5 |
| 2 . SUMMARY OF TEST RESULTS | 6 |
| 2.1 TEST FACILITY | 7 |
| 2.2 MEASUREMENT UNCERTAINTY | 7 |
| 3 . GENERAL INFORMATION | 8 |
| 3.1 GENERAL DESCRIPTION OF EUT | 8 |
| 3.2 DESCRIPTION OF TEST MODES | 10 |
| 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING | 11 |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 12 |
| 3.5 DESCRIPTION OF SUPPORT UNITS | 13 |
| 4 . EMC EMISSION TEST | 14 |
| 4.1 CONDUCTED EMISSION MEASUREMENT | 14 |
| 4.1.1 POWER LINE CONDUCTED EMISSION | 14 |
| 4.1.2 MEASUREMENT INSTRUMENTS LIST | 14 |
| 4.1.3 TEST PROCEDURE | 15 |
| 4.1.4 DEVIATION FROM TEST STANDARD | 15 |
| 4.1.5 TEST SETUP | 15 |
| 4.1.6 EUT OPERATING CONDITIONS | 15 |
| 4.1.7 TEST RESULTS | 16 |
| 4.2 RADIATED EMISSION MEASUREMENT | 21 |
| 4.2.1 RADIATED EMISSION LIMITS | 21 |
| 4.2.2 MEASUREMENT INSTRUMENTS LIST | 22 |
| 4.2.3 TEST PROCEDURE | 22 |
| 4.2.4 DEVIATION FROM TEST STANDARD | 23 |
| 4.2.5 TEST SETUP | 23 |
| 4.2.6 EUT OPERATING CONDITIONS | 24 |
| 4.2.7 TEST RESULTS (9K~ 30MHz) | 25 |
| 4.2.8 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ | 26 |
| 4.2.9 TEST RESULTS - ABOVE 1000MHZ | 39 |
| 5 . 26dB SPECTRUM BANDWIDTH | 71 |
| 5.1 APPLIED PROCEDURES / LIMIT | 71 |
| 5.1.1 MEASUREMENT INSTRUMENTS LIST | 71 |
| 5.1.2 TEST PROCEDURE | 71 |
| 5.1.3 DEVIATION FROM STANDARD | 71 |
| 5.1.4 TEST SETUP | 71 |
| 5.1.5 EUT OPERATION CONDITIONS | 71 |
| 5.1.6 TEST RESULTS | 72 |
| 6 . MAXIMUM CONDUCTED OUTPUT POWER | 78 |



| Table of Contents | Page |
|--|------------|
| 6.1 APPLIED PROCEDURES / LIMIT | 78 |
| 6.1.1 MEASUREMENT INSTRUMENTS LIST | 78 |
| 6.1.2 TEST PROCEDURE | 78 |
| 6.1.3 DEVIATION FROM STANDARD | 79 |
| 6.1.4 TEST SETUP | 79 |
| 6.1.5 EUT OPERATION CONDITIONS | 79 |
| 6.1.6 TEST RESULTS | 80 |
| 7 . ANTENNA CONDUCTED SPURIOUS EMISSION | 92 |
| 7.1 APPLIED PROCEDURES / LIMIT | 92 |
| 7.1.1 MEASUREMENT INSTRUMENTS LIST | 92 |
| 7.1.2 TEST PROCEDURE | 92 |
| 7.1.3 DEVIATION FROM STANDARD | 92 |
| 7.1.4 TEST SETUP | 92 |
| 7.1.5 EUT OPERATION CONDITIONS | 92 |
| 7.1.6 TEST RESULTS | 93 |
| 8 . POWER SPECTRAL DENSITY TEST | 103 |
| 8.1 APPLIED PROCEDURES / LIMIT | 103 |
| 8.1.1 MEASUREMENT INSTRUMENTS LIST | 103 |
| 8.1.2 TEST PROCEDURE | 103 |
| 8.1.3 DEVIATION FROM STANDARD | 103 |
| 8.1.4 TEST SETUP | 103 |
| 8.1.5 EUT OPERATION CONDITIONS | 103 |
| 9 . PEAK EXCURSION MEASUREMENT | 116 |
| 9.1 APPLIED PROCEDURES / LIMIT | 116 |
| 9.1.1 MEASUREMENT INSTRUMENTS LIST | 116 |
| 9.1.2 TEST PROCEDURE | 116 |
| 9.1.3 DEVIATION FROM STANDARD | 116 |
| 9.1.4 TEST SETUP | 117 |
| 9.1.5 EUT OPERATION CONDITIONS | 117 |
| 9.1.6 TEST RESULTS | 118 |
| 10 . FREQUENCY STABILITY MEASUREMENT | 124 |
| 10.1 APPLIED PROCEDURES / LIMIT | 124 |
| 10.1.1 MEASUREMENT INSTRUMENTS LIST | 124 |
| 10.1.2 TEST PROCEDURE | 124 |
| 10.1.3 DEVIATION FROM STANDARD | 124 |
| 10.1.4 TEST SETUP | 125 |
| 10.1.5 EUT OPERATION CONDITIONS | 125 |
| 10.1.6 TEST RESULTS | 126 |
| 11. EUT TEST PHOTO | 127 |



1. CERTIFICATION

Equipment : Wireless router
Brand Name : D-LINK
Model Name : DIR-815
Applicant : D-LINK Corporation
Manufacturer : D-LINK Corporation
Address : No.289, Sinhu 3rd Rd., Neihu District Taipei City 114, Taiwan, R.O.C
Factory : 1) Shenzhen Gongjin Electronics Co.,Ltd
 2) TAICANG T&W Electronics Co., Ltd.
Address : 1) No 2&3 Buildings, Mingwei Factory Area, Songgang Road West, No. A
 Building, 1#Songgang Road Songgang Sub-District, Shenzhen, Guangdong,
 518105, P.R. China
 2) Jiangnan Road 89, Ludu Town, Taicang, Jiangsu,215412, P.R. China
Date of Test : May. 10, 2013 ~ Jul. 08, 2013
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4 : 2009;
 FCC KDB 789033 D01 General UNII Test Procedures v01r03 .

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-2-1301C210A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5150MHz~5250MHz Mode part of the product.



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC Part15, Subpart E | | | |
|--------------------------------|-----------------------------------|-----------------|---------------|
| Standard(s) Section | Test Item | Judgment | Remark |
| 15.207 | AC Power Line Conducted Emissions | PASS | |
| 15.407(a) | 26dB Spectrum Bandwidth | PASS | |
| 15.407(a) | Maximum Conducted Output Power | PASS | |
| 15.407(a) | Power Spectral Density | PASS | |
| 15.407(a) | Peak Excursion | PASS | |
| 15.407(a) | Radiated Emissions | PASS | |
| 15.407(b) | Band Edge Emissions | PASS | |
| 15.407(g) | Frequency Stability | PASS | |
| 15.203 | Antenna Requirements | PASS | |

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
 Neutron's test firm number for FCC 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U , (dB) | NOTE |
|-----------|--------|-----------------------------|----------|------|
| DG-C02 | CISPR | 150 KHz ~ 30MHz | 1.94 | |

B. Radiated Measurement :

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U , (dB) | NOTE |
|-----------|--------|-----------------------------|------------|----------|------|
| DG-CB03 | CISPR | 30MHz ~ 200MHz | V | 3.82 | |
| | | 30MHz ~ 200MHz | H | 3.60 | |
| | | 200MHz ~ 1,000MHz | V | 3.86 | |
| | | 200MHz ~ 1,000MHz | H | 3.94 | |
| | | 1GHz~18GHz | V | 4.23 | |
| | | 18GHz~40GHz | V | 4.15 | |
| | | 1GHz~18GHz | H | 4.15 | |
| | | 18GHz~40GHz | H | 4.14 | |



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | | |
|------------------------|--|---|
| Equipment | Wireless router | |
| Brand Name | D-LINK | |
| Model Name | DIR-815 | |
| Mode Different | N/A | |
| Product Description | The EUT is a Wireless router . | |
| | Operation Frequency | Band 1:5150MHz~5250MHz |
| | Modulation Type | OFDM |
| | Bit Rate of Transmitter | 11a: 6/ 9/12/18/24/36/48/54Mbps 11n: 300Mbps |
| | Antenna Designation | Please see note 3.(Page 9) |
| | Antenna Gain(Peak) | |
| | Output Power Band 1 | 802.11a: 10.80dBm 802.11n (20M): 11.88dBm 802.11n (40M): 10.27dBm |
| Product Description | More details of EUT technical specification, please refer to the User's Manual. | |
| Power Source | DC voltage supplied from AC/DC adapter. #1 Brand/Model: Gongjin / S06A22-120A050-PB #2 Brand/Model: FRECOM/F05W-120050SPAU | |
| Power Rating | #1 I/P: AC 100-240V~50/60Hz Max 0.3A O/P: DC 12V 500mA #2 I/P: AC 100-240V~50/60Hz 190mA O/P: DC 12V 0.5A | |
| Connecting I/O Port(s) | Please refer to the User's Manual | |



2. Channel List:

| 802.11a/ 802.11n 20M | | 802.11n 40M | |
|-------------------------|--------------------|-------------|--------------------|
| Band 1 | | | |
| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 36 | 5180 | 38 | 5190 |
| 40 | 5200 | 46 | 5230 |
| 44 | 5220 | | |
| 48 | 5240 | | |

3. Antenna Specification:

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | Note |
|------|---------|------------|---------------------|-----------|---------------|------|
| 1 | Airgain | N2430GND | Integral Antenna | N/A | 3.0 | |
| 2 | Airgain | N2430GND | Integral Antenna | N/A | 3.0 | |

Note:

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}**, that is Directional gain=3.0.

| Operating Mode | 1TX | 2TX |
|----------------|--------------------|-------------------|
| | TX Mode | |
| 802.11a | V (ANT 1 or ANT 2) | - |
| 802.11n(20MHz) | - | V (ANT 1 & ANT 2) |
| 802.11n(40MHz) | - | V (ANT 1 & ANT 2) |



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Test Mode | Description |
|-------------------|--|
| Mode 1 | TX A Mode / CH36, CH40, CH48(Band 1) |
| Mode 2 | TX N20 Mode / CH36, CH40, CH48(Band 1) |
| Mode 3 | TX N40 Mode / CH38, CH46 (Band 1) |
| Mode 4 | TX Mode |

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

| For Conducted Test | |
|---------------------------|-------------|
| Final Test Mode | Description |
| Mode 4 | TX Mode |

| For Radiated Test | |
|--------------------------|--|
| Final Test Mode | Description |
| Mode 1 | TX A Mode / CH36, CH40, CH48(Band 1) |
| Mode 2 | TX N20 Mode / CH36, CH40, CH48(Band 1) |
| Mode 3 | TX N40 Mode / CH38, CH46 (Band 1) |



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

| Test software version | SmartTools | | |
|-----------------------|------------|---------|----------|
| Frequency | 5180 MHz | 5200MHz | 5240 MHz |
| A Mode | 49 | 49 | 50 |
| Frequency | 5180 MHz | 5200MHz | 5240 MHz |
| N20 Mode | 46 | 46 | 47 |
| Frequency | 5190 MHz | 5230MHz | |
| N40 Mode | 44 | 46 | |




3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Mode:

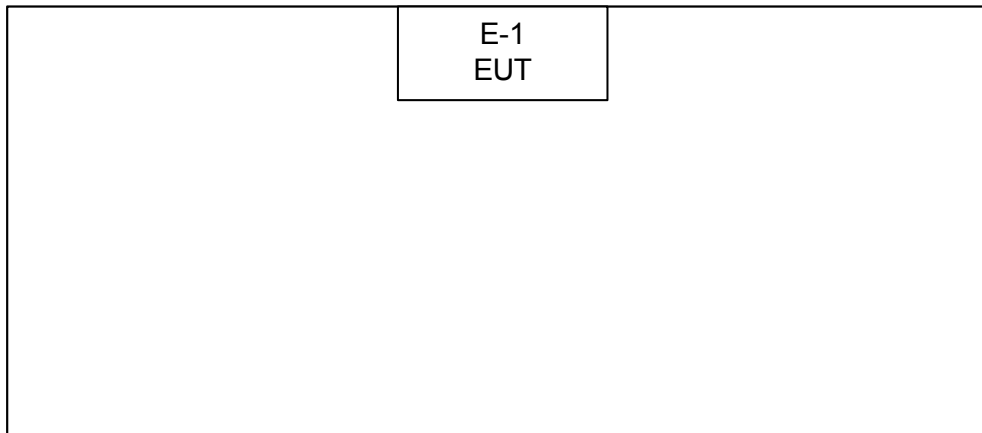


Control Room

Radiated Mode:

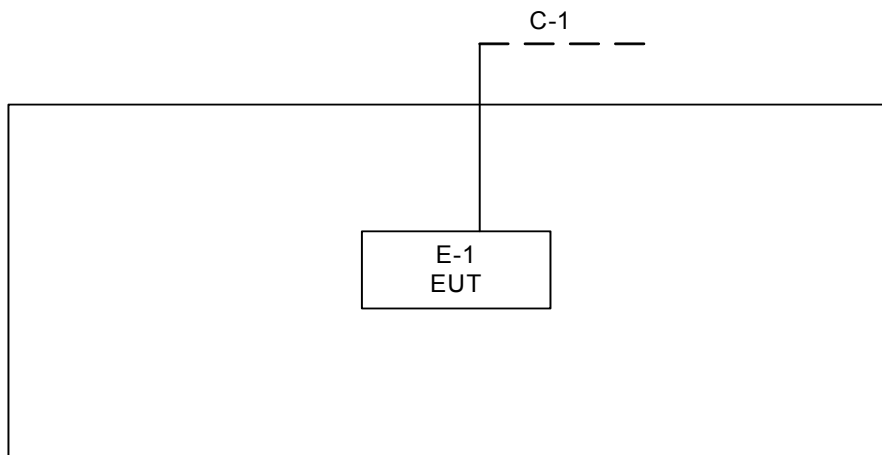

Control Room





3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. | Note |
|------|-----------------|-----------|----------------|------------|------------------|------|
| E-1 | Wireless router | D-LINK | DIR-815 | KA2IR815C1 | N/A | EUT |
| E-2 | NOTEBOOK | DELL | INSPIRON 1420 | DOC | JX193A01SD C2 | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| C-1 | NO | NO | 10m | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in m in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Class A (dBUV) | | Class B (dBUV) | |
|-----------------|----------------|---------|----------------|-----------|
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Next Calibration |
|------|-------------------|--------------|----------|----------------|------------------|------------------|
| 1 | LISN | EMCO | 3816/2 | 00052765 | May.24.2013 | Apr. 25, 2014 |
| 2 | LISN | R&S | ENV216 | 100087 | Nov.15.2012 | Nov.16.2013 |
| 3 | Test Cable | N/A | C_17 | N/A | Mar.14.2013 | Mar.15.2014 |
| 4 | EMI TEST RECEIVER | R&S | ESCS30 | 826547/02 2 | May.24.2013 | Apr. 25, 2014 |
| 5 | 50Ω Terminator | SHX | TF2-3G-A | 08122902 | May.24.2013 | Apr. 25, 2014 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is One Year.


4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

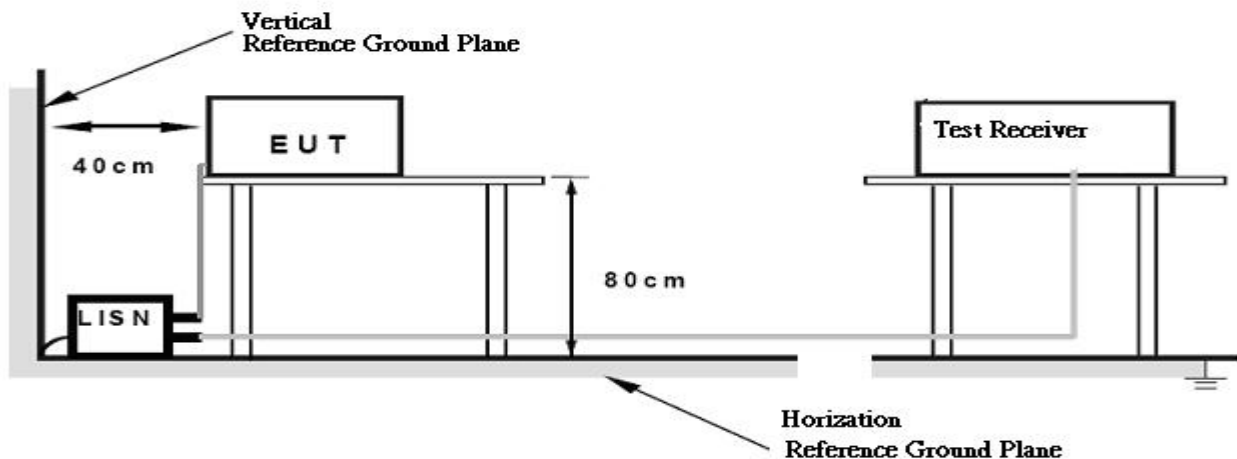

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.




4.1.7 TEST RESULTS

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ◦ In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured ◦
- (2) Measuring frequency range from 150KHz to 30MHz ◦




| | | | |
|--------------|-----------------|--------------------|-------------------|
| EUT: | Wireless router | Model Name: | DIR-815 |
| Temperature: | 24 °C | Relative Humidity: | 55 % |
| Test Power: | AC 120V/60Hz | Phase: | Line |
| Test Mode : | TX Mode | Adapter: | S06A22-120A050-PB |

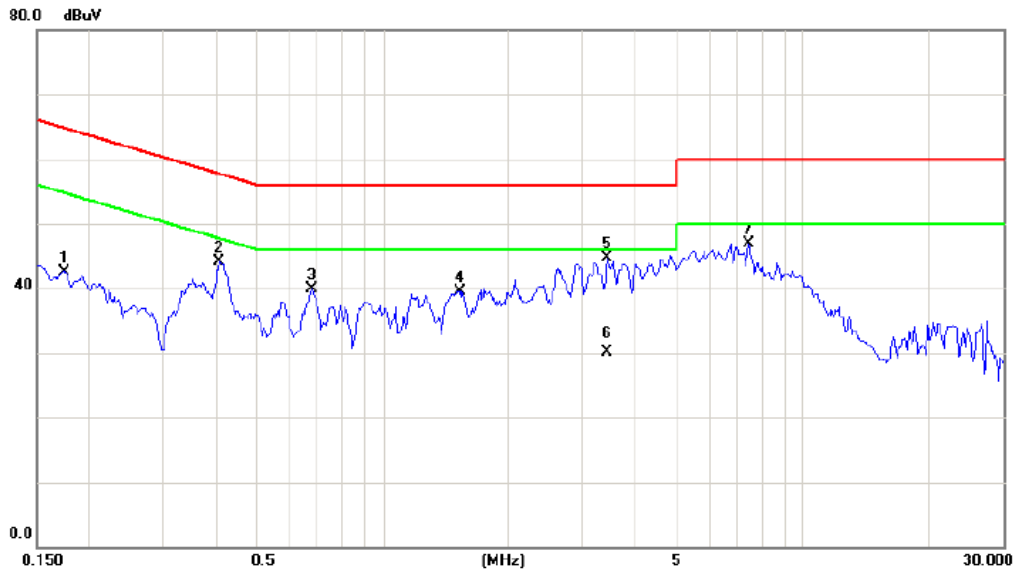

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.1758 | 32.64 | 9.77 | 42.41 | 64.68 | -22.27 | peak | |
| 2 | | 0.4070 | 34.30 | 9.72 | 44.02 | 57.71 | -13.69 | peak | |
| 3 | | 0.6774 | 30.12 | 9.70 | 39.82 | 56.00 | -16.18 | peak | |
| 4 | | 1.5262 | 29.87 | 9.70 | 39.57 | 56.00 | -16.43 | peak | |
| 5 | * | 3.4205 | 34.88 | 9.74 | 44.62 | 56.00 | -11.38 | peak | |
| 6 | | 3.4205 | 20.39 | 9.74 | 30.13 | 46.00 | -15.87 | AVG | |
| 7 | | 7.4256 | 37.12 | 9.82 | 46.94 | 60.00 | -13.06 | peak | |




| | | | |
|--------------|-----------------|--------------------|-------------------|
| EUT: | Wireless router | Model Name: | DIR-815 |
| Temperature: | 24 °C | Relative Humidity: | 55 % |
| Test Power: | AC 120V/60Hz | Phase: | Neutral |
| Test Mode : | TX Mode | Adapter: | S06A22-120A050-PB |

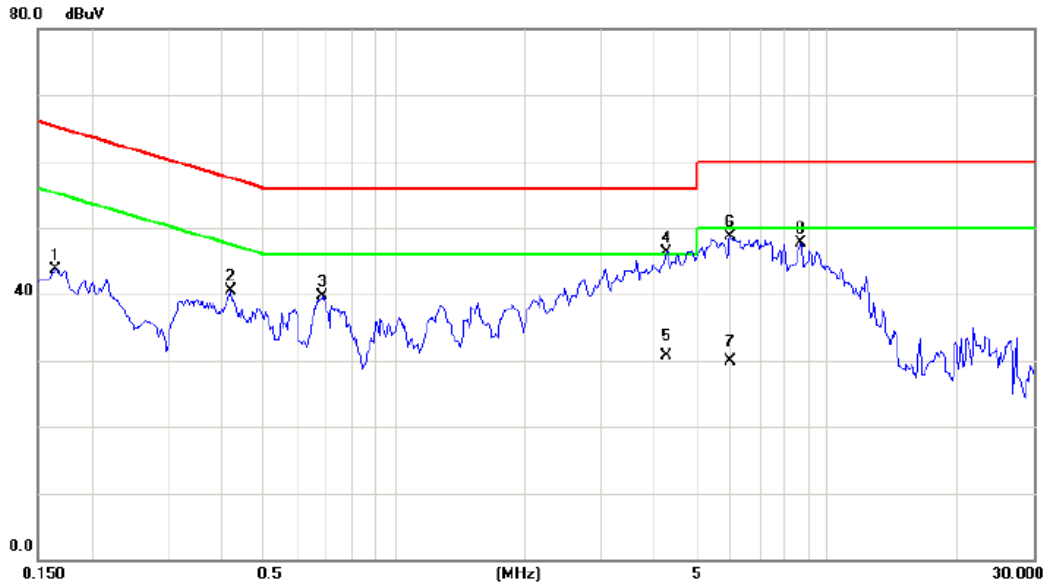

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Over dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|------------------|------------|---------|----------|---------|
| 1 | 0.1650 | 33.91 | 9.77 | 43.68 | 65.21 | -21.53 | peak | |
| 2 | 0.4180 | 30.88 | 9.70 | 40.58 | 57.49 | -16.91 | peak | |
| 3 | 0.6846 | 30.08 | 9.69 | 39.77 | 56.00 | -16.23 | peak | |
| 4 * | 4.2525 | 36.48 | 9.75 | 46.23 | 56.00 | -9.77 | peak | |
| 5 | 4.2525 | 21.02 | 9.75 | 30.77 | 46.00 | -15.23 | AVG | |
| 6 | 5.9730 | 39.00 | 9.79 | 48.79 | 60.00 | -11.21 | peak | |
| 7 | 5.9730 | 20.21 | 9.79 | 30.00 | 50.00 | -20.00 | AVG | |
| 8 | 8.7077 | 37.94 | 9.81 | 47.75 | 60.00 | -12.25 | peak | |




| | | | |
|--------------|-----------------|--------------------|-----------------|
| EUT: | Wireless router | Model Name: | DIR-815 |
| Temperature: | 24 °C | Relative Humidity: | 55 % |
| Test Power: | AC 120V/60Hz | Phase: | Line |
| Test Mode : | TX Mode | Adapter: | F05W-120050SPAU |

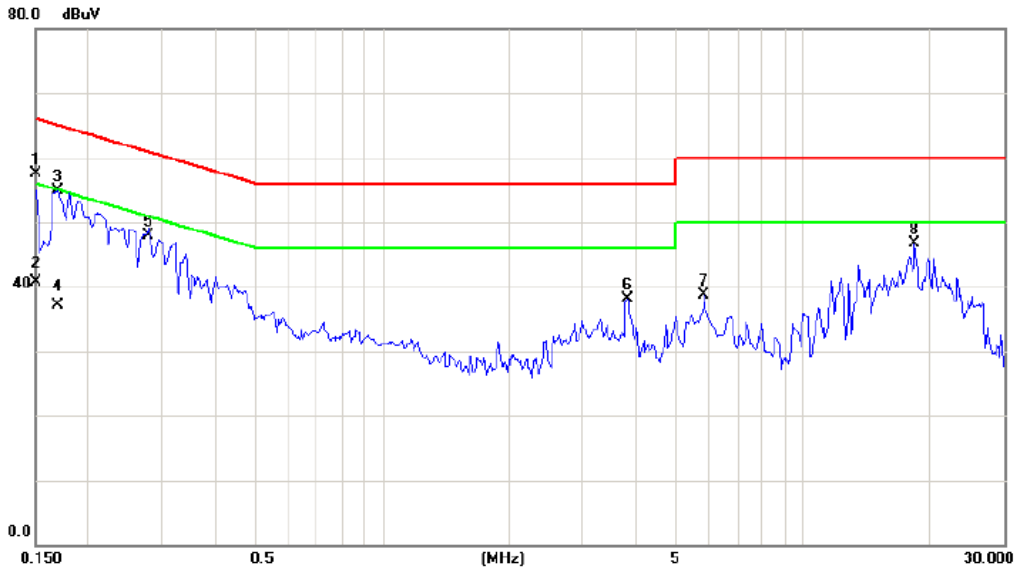

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | * | 0.1500 | 47.63 | 9.79 | 57.42 | 66.00 | -8.58 | peak | |
| 2 | | 0.1500 | 30.87 | 9.79 | 40.66 | 56.00 | -15.34 | AVG | |
| 3 | | 0.1693 | 45.07 | 9.77 | 54.84 | 64.99 | -10.15 | peak | |
| 4 | | 0.1693 | 27.43 | 9.77 | 37.20 | 54.99 | -17.79 | AVG | |
| 5 | | 0.2806 | 38.10 | 9.74 | 47.84 | 60.80 | -12.96 | peak | |
| 6 | | 3.8241 | 28.33 | 9.76 | 38.09 | 56.00 | -17.91 | peak | |
| 7 | | 5.8166 | 28.80 | 9.82 | 38.62 | 60.00 | -21.38 | peak | |
| 8 | | 18.4078 | 36.79 | 9.86 | 46.65 | 60.00 | -13.35 | peak | |



| | | | |
|--------------|-----------------|--------------------|-----------------|
| EUT: | Wireless router | Model Name: | DIR-815 |
| Temperature: | 24 °C | Relative Humidity: | 55 % |
| Test Power: | AC 120V/60Hz | Phase: | Neutral |
| Test Mode : | TX Mode | Adapter: | F05W-120050SPAU |

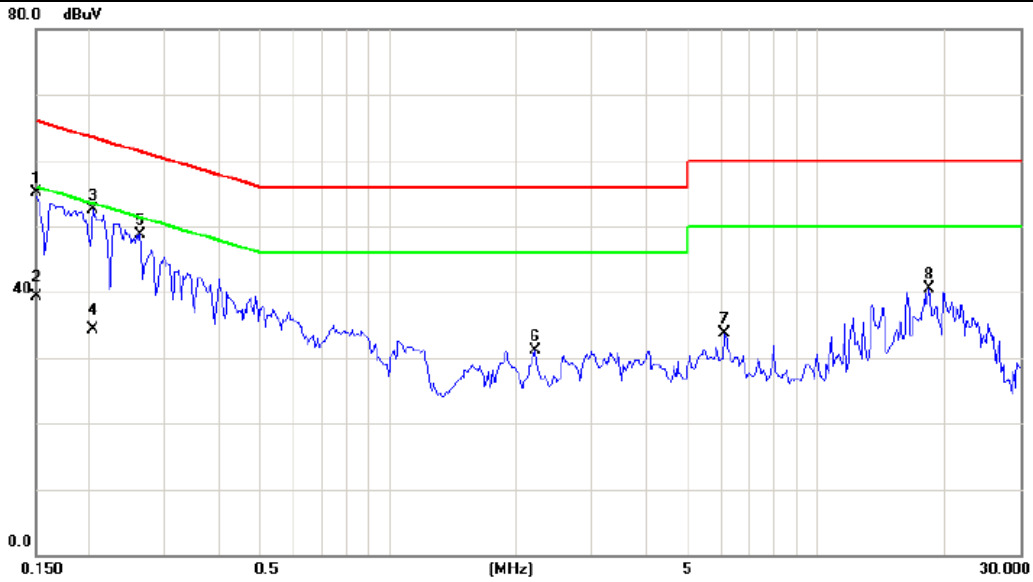

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | * | 0.1500 | 45.25 | 9.79 | 55.04 | 66.00 | -10.96 | peak | |
| 2 | | 0.1500 | 29.51 | 9.79 | 39.30 | 56.00 | -16.70 | AVG | |
| 3 | | 0.2040 | 42.69 | 9.74 | 52.43 | 63.45 | -11.02 | peak | |
| 4 | | 0.2040 | 24.62 | 9.74 | 34.36 | 53.45 | -19.09 | AVG | |
| 5 | | 0.2632 | 39.07 | 9.73 | 48.80 | 61.33 | -12.53 | peak | |
| 6 | | 2.2015 | 21.51 | 9.68 | 31.19 | 56.00 | -24.81 | peak | |
| 7 | | 6.1013 | 23.86 | 9.79 | 33.65 | 60.00 | -26.35 | peak | |
| 8 | | 18.4078 | 30.58 | 9.87 | 40.45 | 60.00 | -19.55 | peak | |



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microrvolts/meter) | Measurement Distance (meters) |
|-------------------|------------------------------------|-------------------------------|
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | (dBuV/m) | |
|-----------------|----------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

| Frequencies (MHz) | EIRP Limit (dBm) | Equivalent Field Strength at 3m (dBµV/m) |
|-------------------|------------------|--|
| 5150~5250 | -27 | 68.3 |
| 5250~5350 | -27 | 68.3 |
| 5470~5725 | -27 | 68.3 |
| 5725~5825 | -27 | 68.3 |
| | -17 | 78.3 |

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



4.2.2 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Next Calibration |
|------|-------------------------|--------------|-----------|------------|------------------|------------------|
| 1 | Antenna | Schwarzbeck | VULB9160 | 9160-3232 | May.25.2013 | Apr. 25, 2014 |
| 2 | Amplifier | HP | 8447D | 2944A09673 | May.04.2013 | Apr. 25, 2014 |
| 3 | Test Receiver | R&S | ESCI | 100382 | May.04.2013 | Apr. 25, 2014 |
| 4 | Test Cable | N/A | C-01_CB03 | N/A | Jul.01.2013 | Jun.30.2014 |
| 5 | Antenna | ETS | 3115 | 00075789 | May.25.2013 | Apr. 25, 2014 |
| 6 | Amplifier | Agilent | 8449B | 3008A02274 | May.04.2013 | Apr. 25, 2014 |
| 7 | Spectrum | Agilent | E4408B | US39240143 | Nov.24.2012 | Nov. 16.2013 |
| 8 | Test Cable | HUBER+SUHNER | C-45 | N/A | May.02.2013 | Apr. 30, 2014 |
| 9 | Controller | CT | SC100 | N/A | N/A | N/A |
| 10 | Horn Antenna | EMCO | 3115 | 9605-4803 | May.26.2013 | May.25.2014 |
| 11 | Active Loop Antenna | R&S | HFH2-Z2 | 830749/020 | May.04.2013 | Apr. 25, 2014 |
| 12 | Broad-Band Horn Antenna | Schwarzbeck | BBHA 9170 | 9170319 | Oct.13.2012 | Oct.12.2013 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 1.5m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP


Radiated Emission Test Set-Up Frequency 30 - 1000MHz

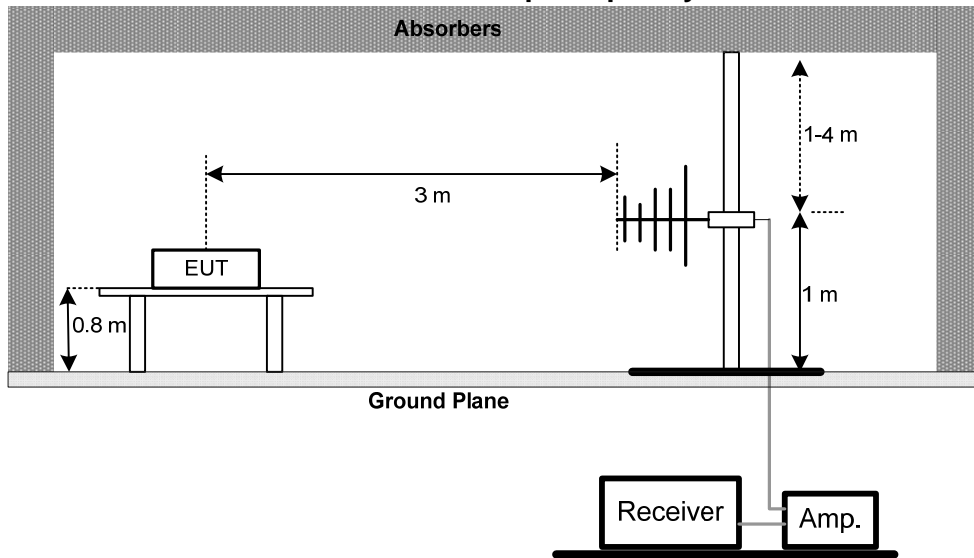

Radiated Emission Test Set-Up Frequency Above 1 GHz

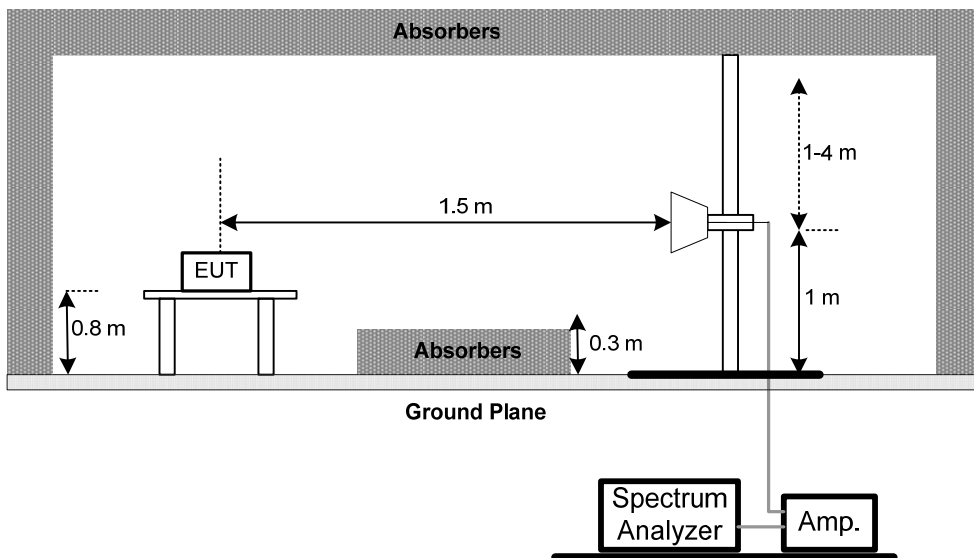

Radiated emissions below 30MHz

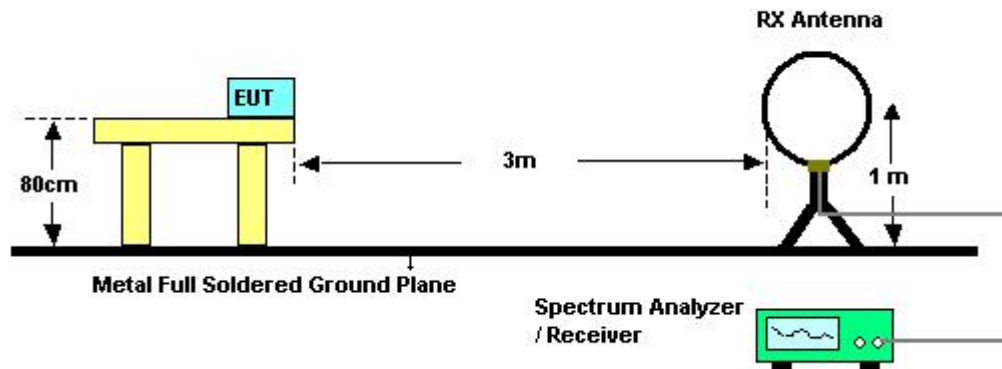

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



4.2.7 TEST RESULTS (9K~ 30MHz)

| | | | |
|----------------|-----------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 24 °C | Relative Humidity : | 54 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | TX Mode | | |

| Freq. (MHz) | Ant. 0°/90° | Reading(RA) (dBuV) | Corr.Factor(CF) (dB) | Measured(FS) (dBuV/m) | Limits(QP) (dBuV/m) | Margin (dB) | Note |
|----------------|----------------|-----------------------|-------------------------|--------------------------|------------------------|----------------|------|
| 0.0096 | 0° | 20.36 | 24.30 | 44.66 | 128.00 | -83.34 | AV |
| 0.0096 | 0° | 22.45 | 24.30 | 46.75 | 148.00 | -101.25 | PK |
| 0.0235 | 0° | 18.65 | 24.08 | 42.73 | 120.20 | -77.47 | AV |
| 0.0235 | 0° | 20.67 | 24.08 | 44.75 | 140.20 | -95.45 | PK |
| 0.0376 | 0° | 18.97 | 23.19 | 42.16 | 116.11 | -73.95 | AV |
| 0.0376 | 0° | 22.32 | 23.19 | 45.51 | 136.11 | -90.60 | PK |
| 0.0676 | 0° | 19.31 | 22.05 | 41.36 | 111.00 | -69.64 | AV |
| 0.0676 | 0° | 23.64 | 22.05 | 45.69 | 131.00 | -85.31 | PK |
| 0.2567 | 0° | 21.35 | 20.38 | 41.73 | 99.42 | -57.68 | AVG |
| 0.2567 | 0° | 23.46 | 20.38 | 43.84 | 119.42 | -75.57 | PK |
| 1.2436 | 0° | 24.33 | 19.58 | 43.91 | 65.71 | -21.81 | QP |

| Freq. (MHz) | Ant. 0°/90° | Reading(RA) (dBuV) | Corr.Factor(CF) (dB) | Measured(FS) (dBuV/m) | Limits(QP) (dBuV/m) | Margin (dB) | Note |
|----------------|----------------|-----------------------|-------------------------|--------------------------|------------------------|----------------|------|
| 0.0096 | 90° | 17.59 | 24.30 | 41.89 | 128.00 | -86.11 | AVG |
| 0.0096 | 90° | 20.88 | 24.30 | 45.18 | 148.00 | -102.82 | PK |
| 0.0254 | 90° | 15.34 | 23.96 | 39.30 | 119.50 | -80.20 | AVG |
| 0.0254 | 90° | 19.34 | 23.96 | 43.30 | 139.50 | -96.20 | PK |
| 0.0362 | 90° | 18.05 | 23.27 | 41.32 | 116.42 | -75.10 | AVG |
| 0.0362 | 90° | 22.68 | 23.27 | 45.95 | 136.42 | -90.47 | PK |
| 0.0657 | 90° | 20.57 | 22.09 | 42.66 | 111.26 | -68.60 | AVG |
| 0.0657 | 90° | 23.87 | 22.09 | 45.96 | 131.26 | -85.30 | PK |
| 0.2427 | 90° | 21.04 | 20.41 | 41.45 | 99.90 | -58.45 | AVG |
| 0.2427 | 90° | 23.33 | 20.41 | 43.74 | 119.90 | -76.16 | PK |
| 1.2557 | 90° | 22.34 | 19.57 | 41.91 | 65.63 | -23.71 | QP |

Remark :

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB);.
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor..




4.2.8 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5180MHz | Phase: | Vertical |
| Adapter: | S06A22-120A050-PB | | |

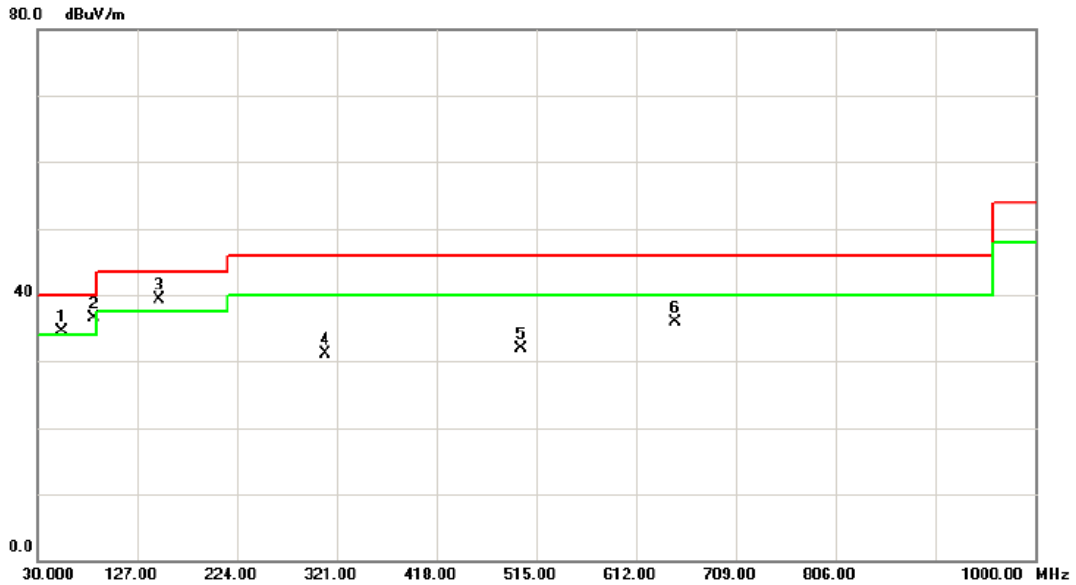

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | ! | 53.2800 | 53.83 | -19.24 | 34.59 | 40.00 | -5.41 | peak | |
| 2 | * | 85.2900 | 61.43 | -24.97 | 36.46 | 40.00 | -3.54 | peak | |
| 3 | ! | 148.3400 | 59.00 | -19.76 | 39.24 | 43.50 | -4.26 | peak | |
| 4 | | 309.3600 | 49.60 | -18.47 | 31.13 | 46.00 | -14.87 | peak | |
| 5 | | 500.4500 | 46.00 | -14.15 | 31.85 | 46.00 | -14.15 | peak | |
| 6 | | 649.8300 | 46.82 | -10.84 | 35.98 | 46.00 | -10.02 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5180MHz | Phase: | Horizontal |
| Adapter: | S06A22-120A050-PB | | |

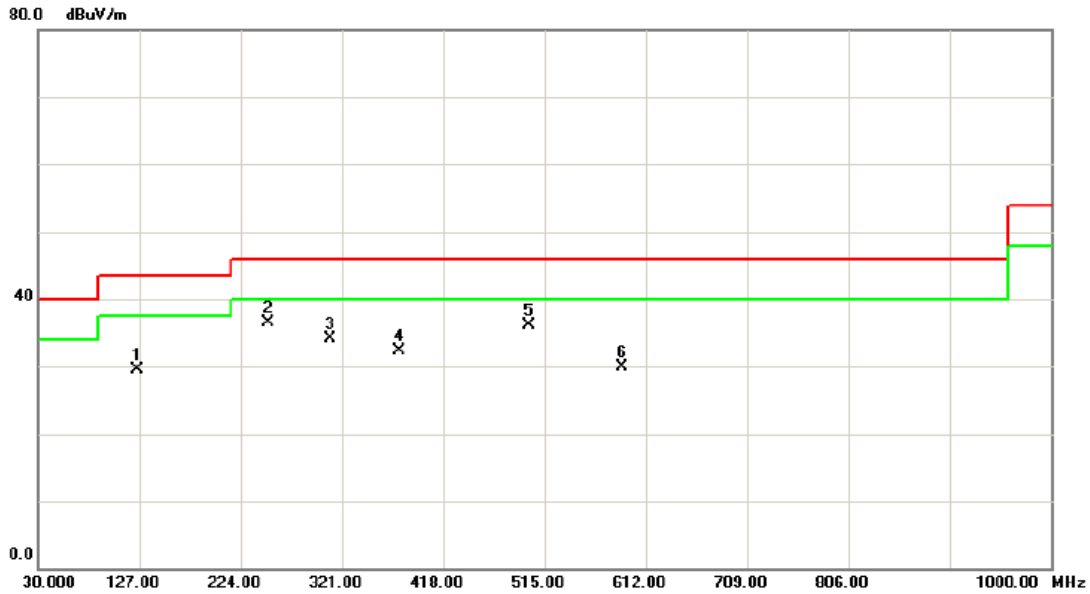

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 125.0600 | 50.38 | -20.79 | 29.59 | 43.50 | -13.91 | peak | |
| 2 | * | 250.1900 | 57.28 | -20.73 | 36.55 | 46.00 | -9.45 | peak | |
| 3 | | 309.3600 | 52.62 | -18.47 | 34.15 | 46.00 | -11.85 | peak | |
| 4 | | 375.3200 | 49.16 | -16.92 | 32.24 | 46.00 | -13.76 | peak | |
| 5 | | 500.4500 | 50.17 | -14.15 | 36.02 | 46.00 | -9.98 | peak | |
| 6 | | 589.6900 | 41.77 | -11.86 | 29.91 | 46.00 | -16.09 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5200MHz | Phase: | Vertical |
| Adapter: | S06A22-120A050-PB | | |

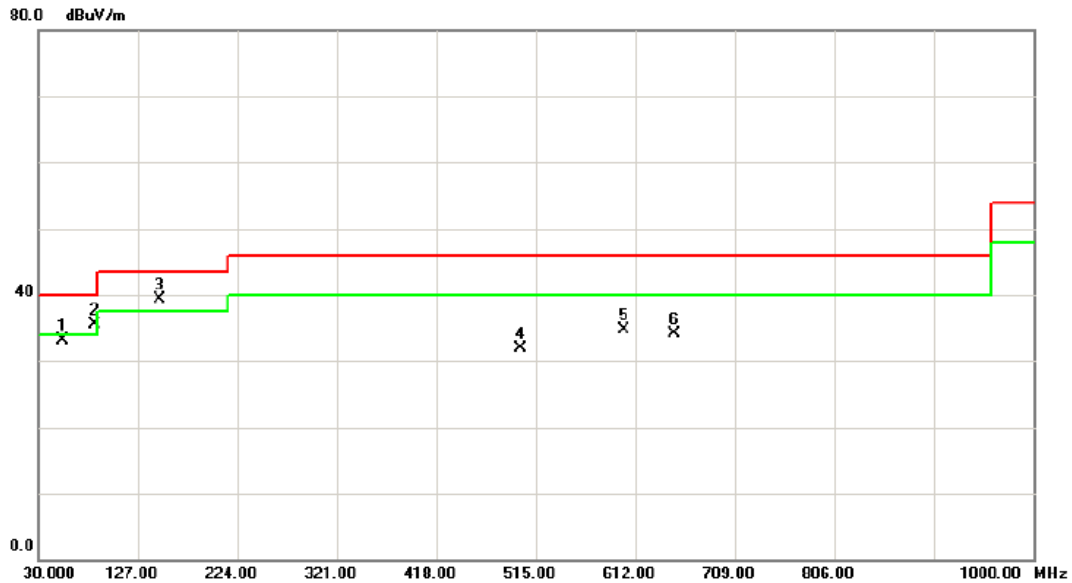

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|--------------------|--------------|---------|----------|---------|
| 1 | 53.2800 | 52.42 | -19.24 | 33.18 | 40.00 | -6.82 | peak | |
| 2 ! | 85.2900 | 60.53 | -24.97 | 35.56 | 40.00 | -4.44 | peak | |
| 3 * | 148.3400 | 59.10 | -19.76 | 39.34 | 43.50 | -4.16 | peak | |
| 4 | 500.4500 | 46.10 | -14.15 | 31.95 | 46.00 | -14.05 | peak | |
| 5 | 600.3600 | 46.36 | -11.57 | 34.79 | 46.00 | -11.21 | peak | |
| 6 | 649.8300 | 44.92 | -10.84 | 34.08 | 46.00 | -11.92 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5200MHz | Phase: | Horizontal |
| Adapter: | S06A22-120A050-PB | | |

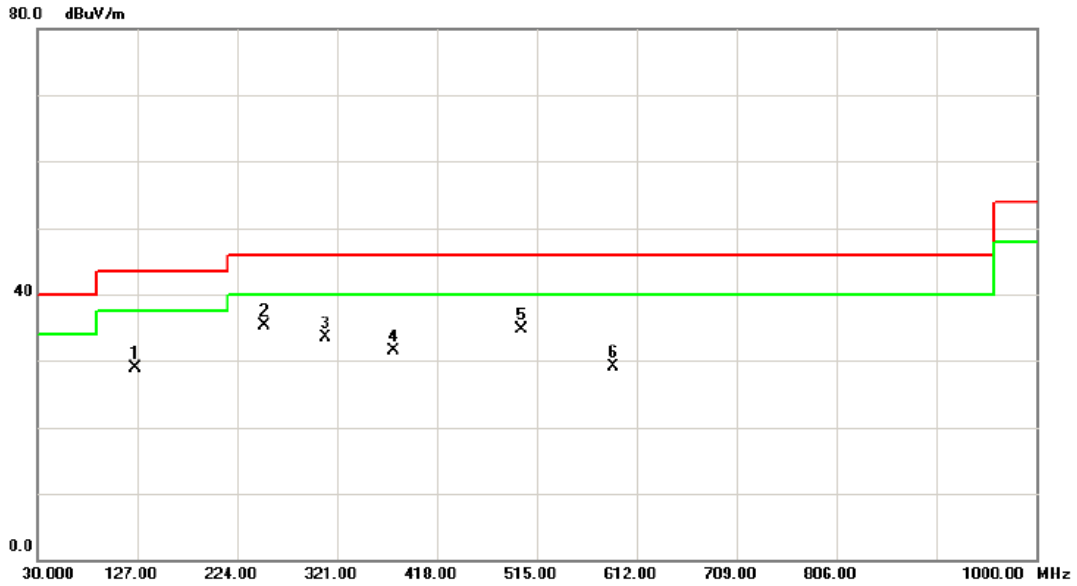

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 125.0600 | 49.66 | -20.79 | 28.87 | 43.50 | -14.63 | peak | |
| 2 | * | 250.1900 | 56.05 | -20.73 | 35.32 | 46.00 | -10.68 | peak | |
| 3 | | 309.3600 | 51.89 | -18.47 | 33.42 | 46.00 | -12.58 | peak | |
| 4 | | 375.3200 | 48.43 | -16.92 | 31.51 | 46.00 | -14.49 | peak | |
| 5 | | 500.4500 | 48.94 | -14.15 | 34.79 | 46.00 | -11.21 | peak | |
| 6 | | 589.6900 | 41.04 | -11.86 | 29.18 | 46.00 | -16.82 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5240MHz | Phase: | Vertical |
| Adapter: | S06A22-120A050-PB | | |

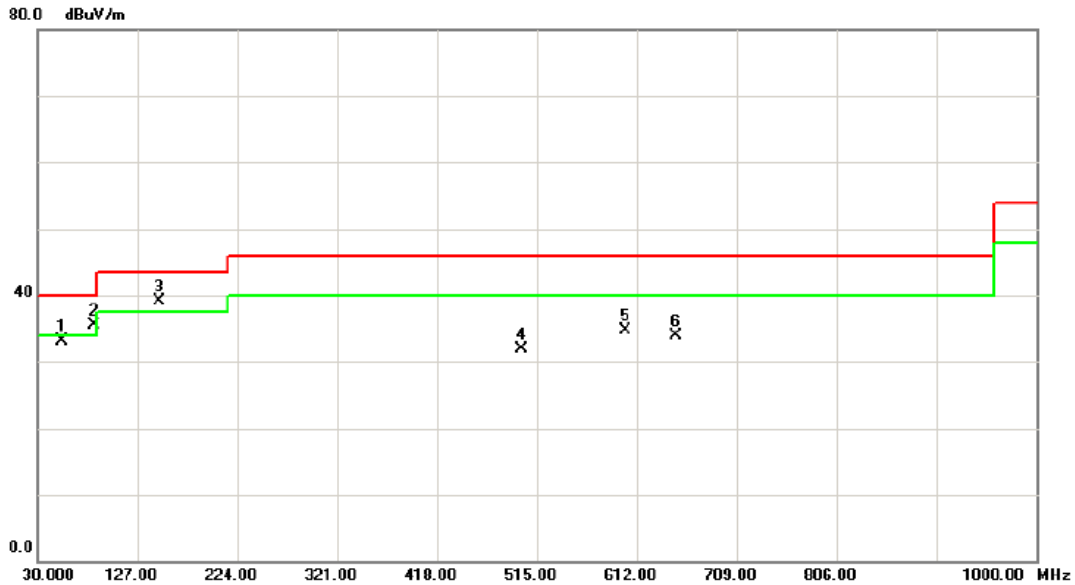

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 53.2800 | 52.28 | -19.24 | 33.04 | 40.00 | -6.96 | peak | |
| 2 | ! | 85.2900 | 60.39 | -24.97 | 35.42 | 40.00 | -4.58 | peak | |
| 3 | * | 148.3400 | 58.96 | -19.76 | 39.20 | 43.50 | -4.30 | peak | |
| 4 | | 500.4500 | 45.96 | -14.15 | 31.81 | 46.00 | -14.19 | peak | |
| 5 | | 600.3600 | 46.22 | -11.57 | 34.65 | 46.00 | -11.35 | peak | |
| 6 | | 649.8300 | 44.78 | -10.84 | 33.94 | 46.00 | -12.06 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5240MHz | Phase: | Horizontal |
| Adapter: | S06A22-120A050-PB | | |

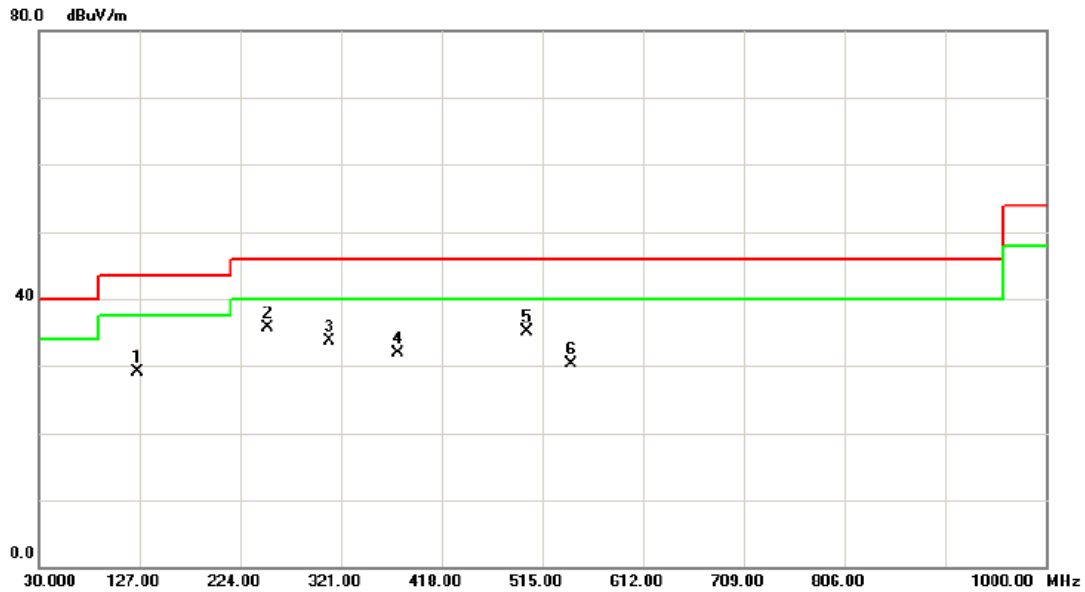

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 125.0600 | 49.99 | -20.79 | 29.20 | 43.50 | -14.30 | peak | |
| 2 | * | 250.1900 | 56.38 | -20.73 | 35.65 | 46.00 | -10.35 | peak | |
| 3 | | 309.3600 | 52.22 | -18.47 | 33.75 | 46.00 | -12.25 | peak | |
| 4 | | 375.3200 | 48.76 | -16.92 | 31.84 | 46.00 | -14.16 | peak | |
| 5 | | 500.4500 | 49.27 | -14.15 | 35.12 | 46.00 | -10.88 | peak | |
| 6 | | 542.1600 | 43.47 | -13.18 | 30.29 | 46.00 | -15.71 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5180MHz | Phase: | Vertical |
| Adapter: | F05W-120050SPAU | | |

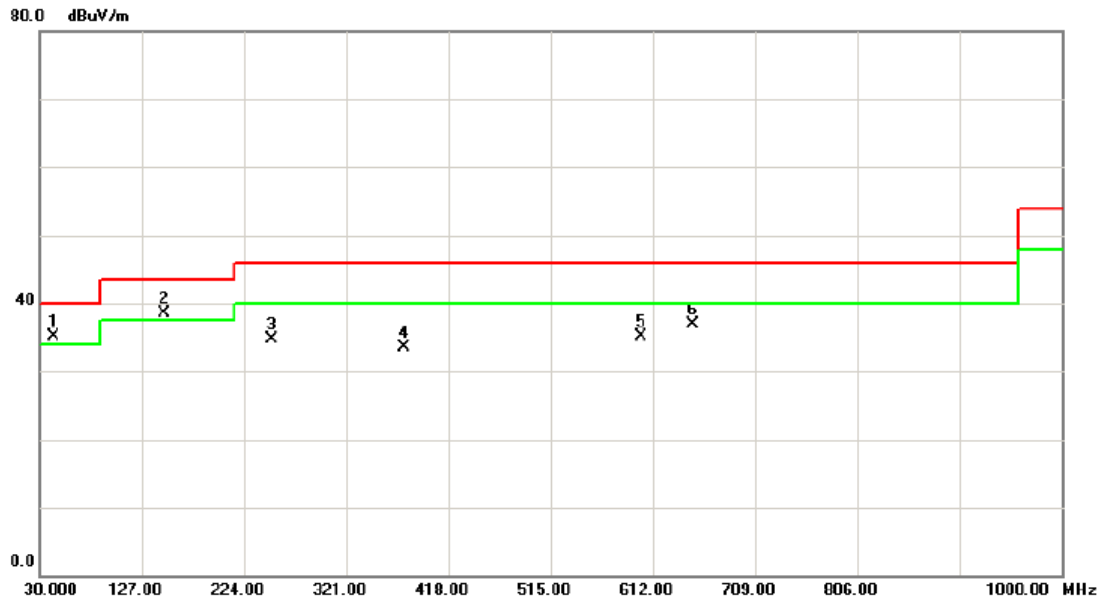

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | * | 43.5800 | 54.47 | -19.43 | 35.04 | 40.00 | -4.96 | peak | |
| 2 | ! | 148.3400 | 58.21 | -19.76 | 38.45 | 43.50 | -5.05 | peak | |
| 3 | | 250.1900 | 55.37 | -20.73 | 34.64 | 46.00 | -11.36 | peak | |
| 4 | | 375.3200 | 50.37 | -16.92 | 33.45 | 46.00 | -12.55 | peak | |
| 5 | | 600.3600 | 46.63 | -11.57 | 35.06 | 46.00 | -10.94 | peak | |
| 6 | | 649.8300 | 47.66 | -10.84 | 36.82 | 46.00 | -9.18 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5180MHz | Phase: | Horizontal |
| Adapter: | F05W-120050SPAU | | |

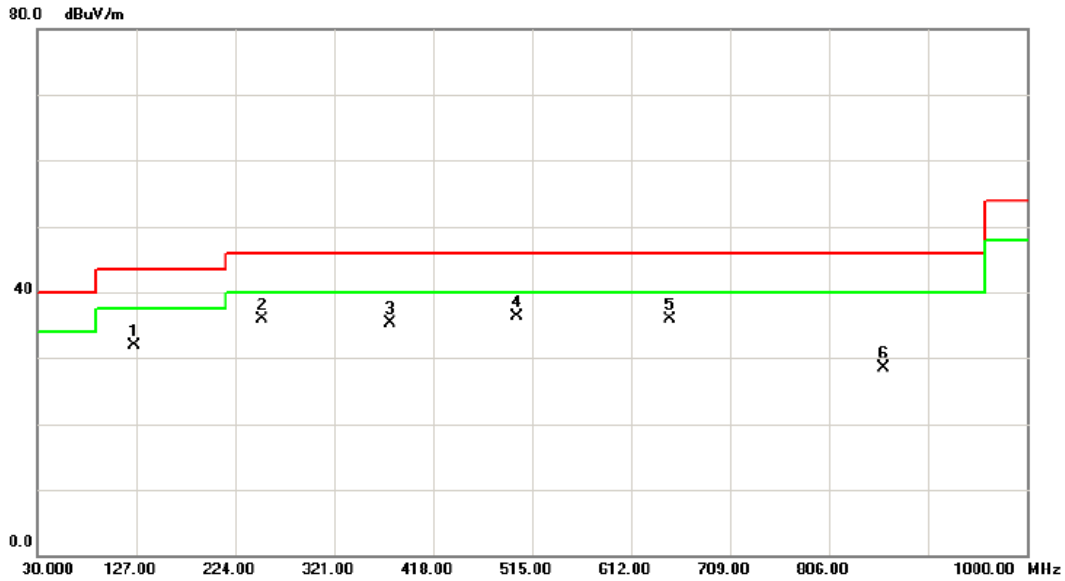

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|--------------------|--------------|---------|----------|---------|
| 1 | 125.0600 | 52.65 | -20.79 | 31.86 | 43.50 | -11.64 | peak | |
| 2 | 250.1900 | 56.70 | -20.73 | 35.97 | 46.00 | -10.03 | peak | |
| 3 | 375.3200 | 52.32 | -16.92 | 35.40 | 46.00 | -10.60 | peak | |
| 4 * | 500.4500 | 50.38 | -14.15 | 36.23 | 46.00 | -9.77 | peak | |
| 5 | 649.8300 | 46.74 | -10.84 | 35.90 | 46.00 | -10.10 | peak | |
| 6 | 859.3500 | 36.22 | -7.77 | 28.45 | 46.00 | -17.55 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5200MHz | Phase: | Vertical |
| Adapter: | F05W-120050SPAU | | |

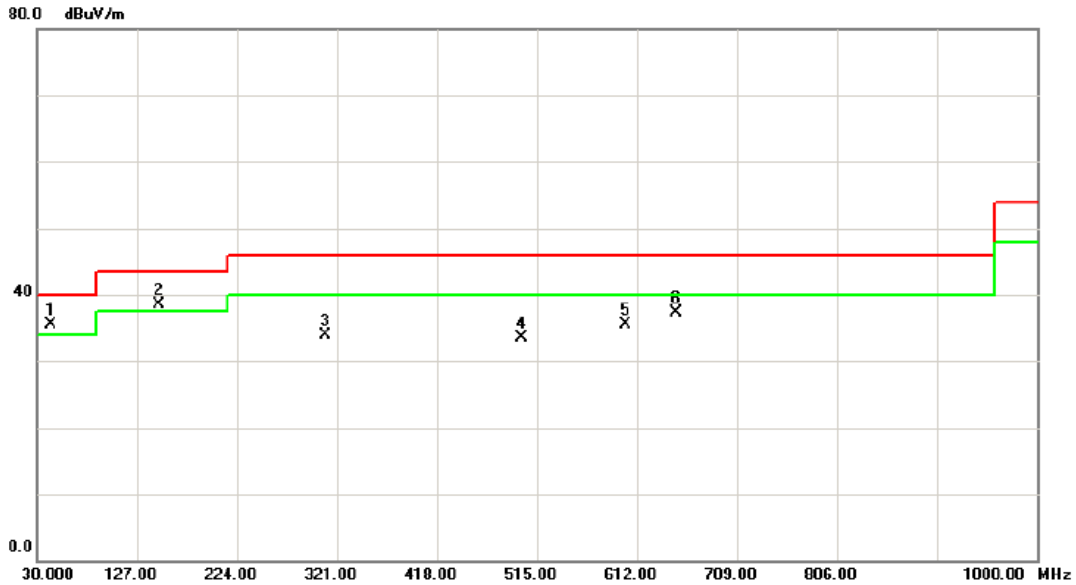

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | * | 43.5800 | 54.97 | -19.43 | 35.54 | 40.00 | -4.46 | peak | |
| 2 | ! | 148.3400 | 58.21 | -19.76 | 38.45 | 43.50 | -5.05 | peak | |
| 3 | | 309.3600 | 52.44 | -18.47 | 33.97 | 46.00 | -12.03 | peak | |
| 4 | | 500.4500 | 47.70 | -14.15 | 33.55 | 46.00 | -12.45 | peak | |
| 5 | | 600.3600 | 47.13 | -11.57 | 35.56 | 46.00 | -10.44 | peak | |
| 6 | | 649.8300 | 48.16 | -10.84 | 37.32 | 46.00 | -8.68 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5200MHz | Phase: | Horizontal |
| Adapter: | F05W-120050SPAU | | |

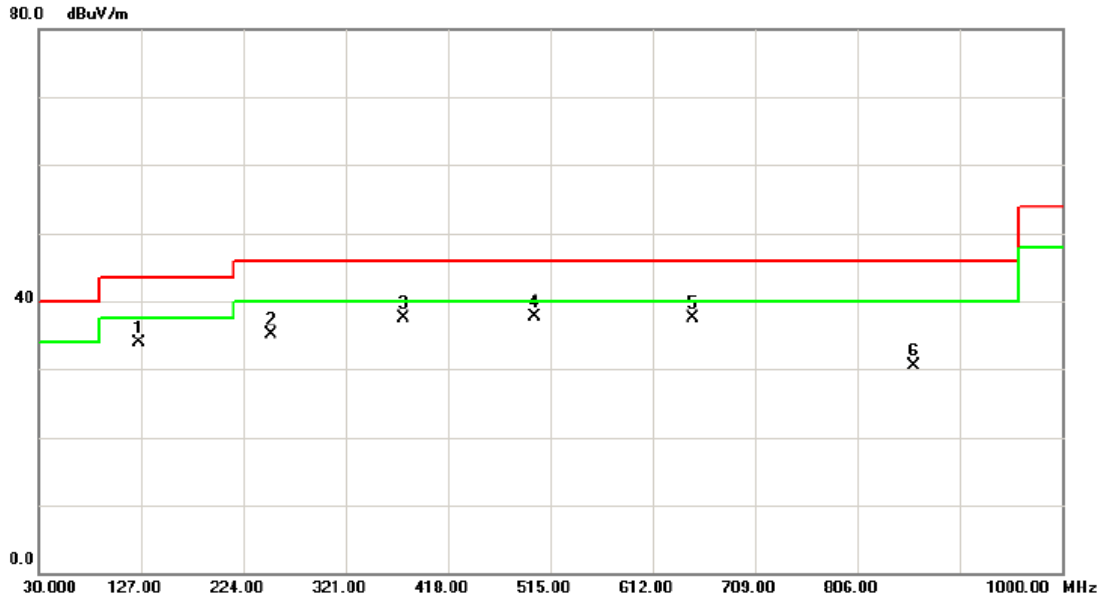

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|--------------------|--------------|---------|----------|---------|
| 1 | 125.0600 | 54.71 | -20.79 | 33.92 | 43.50 | -9.58 | peak | |
| 2 | 250.1900 | 55.76 | -20.73 | 35.03 | 46.00 | -10.97 | peak | |
| 3 | 375.3200 | 54.38 | -16.92 | 37.46 | 46.00 | -8.54 | peak | |
| 4 * | 500.4500 | 51.94 | -14.15 | 37.79 | 46.00 | -8.21 | peak | |
| 5 | 649.8300 | 48.30 | -10.84 | 37.46 | 46.00 | -8.54 | peak | |
| 6 | 859.3500 | 38.28 | -7.77 | 30.51 | 46.00 | -15.49 | peak | |




| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5240MHz | Phase: | Vertical |
| Adapter: | F05W-120050SPAU | | |

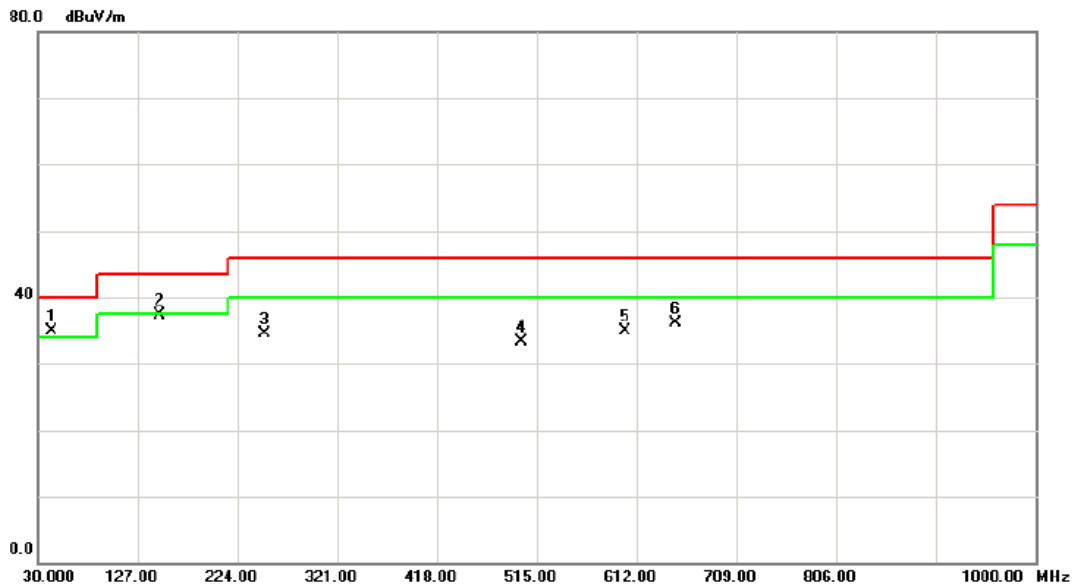

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | * | 43.5800 | 54.32 | -19.43 | 34.89 | 40.00 | -5.11 | peak | |
| 2 | | 148.3400 | 57.06 | -19.76 | 37.30 | 43.50 | -6.20 | peak | |
| 3 | | 250.1900 | 55.21 | -20.73 | 34.48 | 46.00 | -11.52 | peak | |
| 4 | | 500.4500 | 47.55 | -14.15 | 33.40 | 46.00 | -12.60 | peak | |
| 5 | | 600.3600 | 46.48 | -11.57 | 34.91 | 46.00 | -11.09 | peak | |
| 6 | | 649.8300 | 47.01 | -10.84 | 36.17 | 46.00 | -9.83 | peak | |



| | | | |
|---------------|--------------------------|---------------------|--------------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25°C | Relative Humidity : | 58 % |
| Pressure : | 1010 hPa | Test Voltage : | AC 120V/60Hz |
| Test Mode : | Band 1/TX A Mode 5240MHz | Phase: | Horizontal |
| Adapter: | F05W-120050SPAU | | |

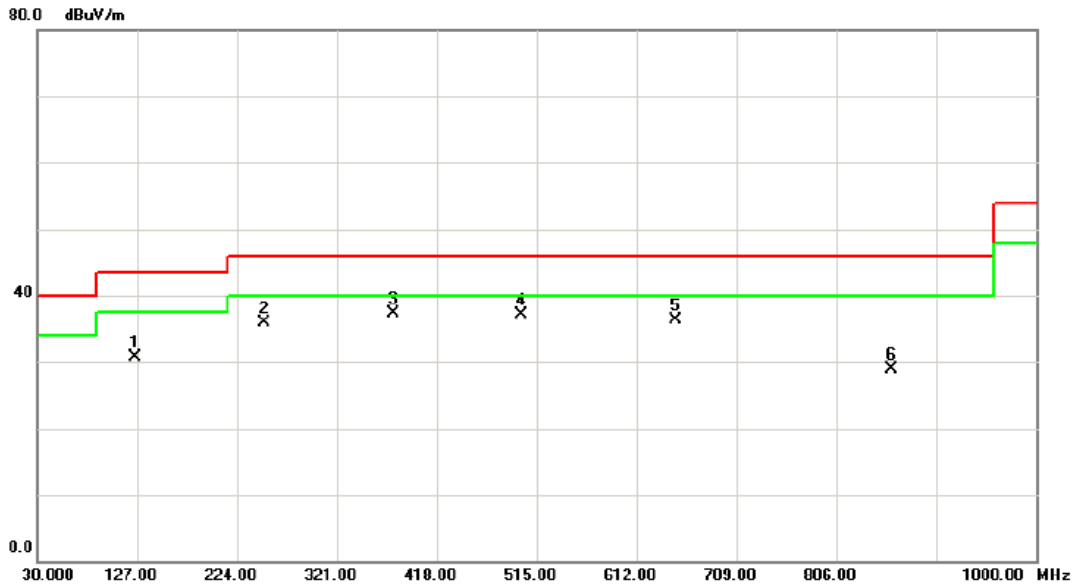

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|--------------------|--------------|---------|----------|---------|
| 1 | 125.0600 | 51.54 | -20.79 | 30.75 | 43.50 | -12.75 | peak | |
| 2 | 250.1900 | 56.58 | -20.73 | 35.85 | 46.00 | -10.15 | peak | |
| 3 * | 375.3200 | 54.20 | -16.92 | 37.28 | 46.00 | -8.72 | peak | |
| 4 | 500.4500 | 51.26 | -14.15 | 37.11 | 46.00 | -8.89 | peak | |
| 5 | 649.8300 | 47.12 | -10.84 | 36.28 | 46.00 | -9.72 | peak | |
| 6 | 859.3500 | 36.60 | -7.77 | 28.83 | 46.00 | -17.17 | peak | |



4.2.9 TEST RESULTS - ABOVE 1000MHZ

| | | | |
|----------------|---------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX A Mode 5180MHz | | |



| Freq. (MHz) | Ant.Pd. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | | | |
| 5150.00 | V | 22.10 | 6.37 | 40.09 | 62.19 | 46.46 | -42.58 | -58.31 | 68.30 | 54.00 | -27.00 | -41.30 | X/E |
| 5173.80 | V | 63.40 | 54.61 | 40.15 | 103.55 | 94.76 | -1.22 | -10.01 | | | | | X/F |
| 10359.88 | V | 36.60 | 24.72 | 13.73 | 50.33 | 38.45 | -54.44 | -66.32 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH36(Above 1000 MHz, Vertical)

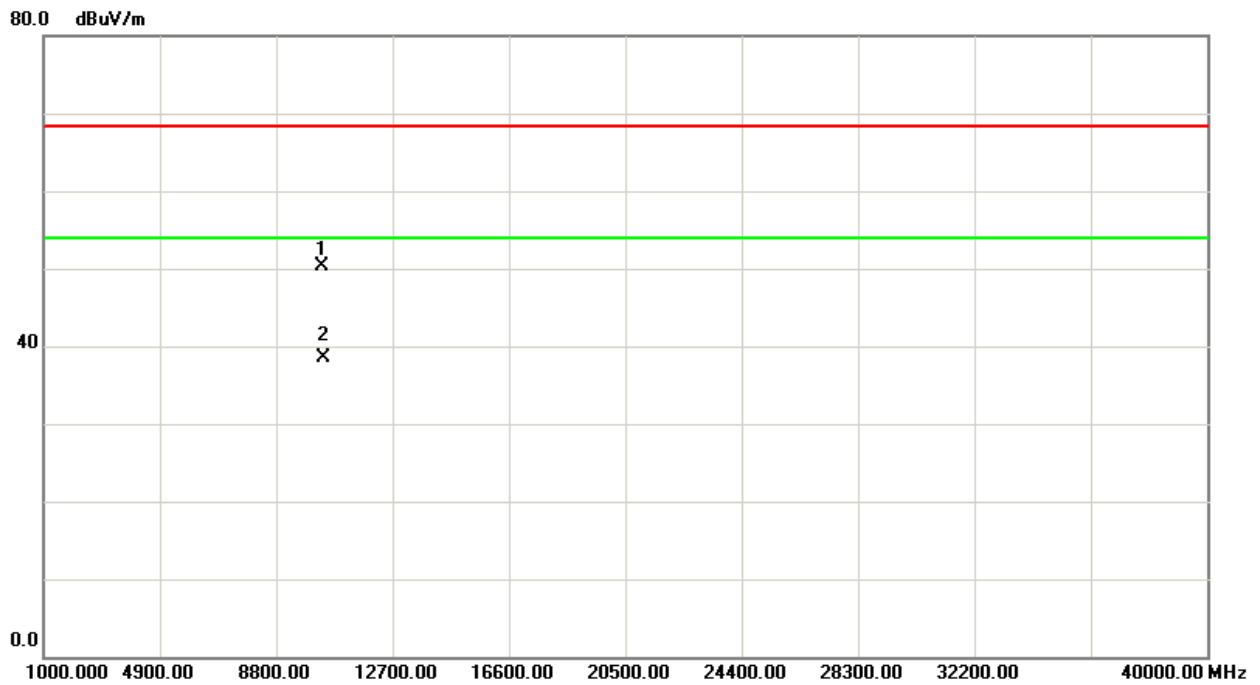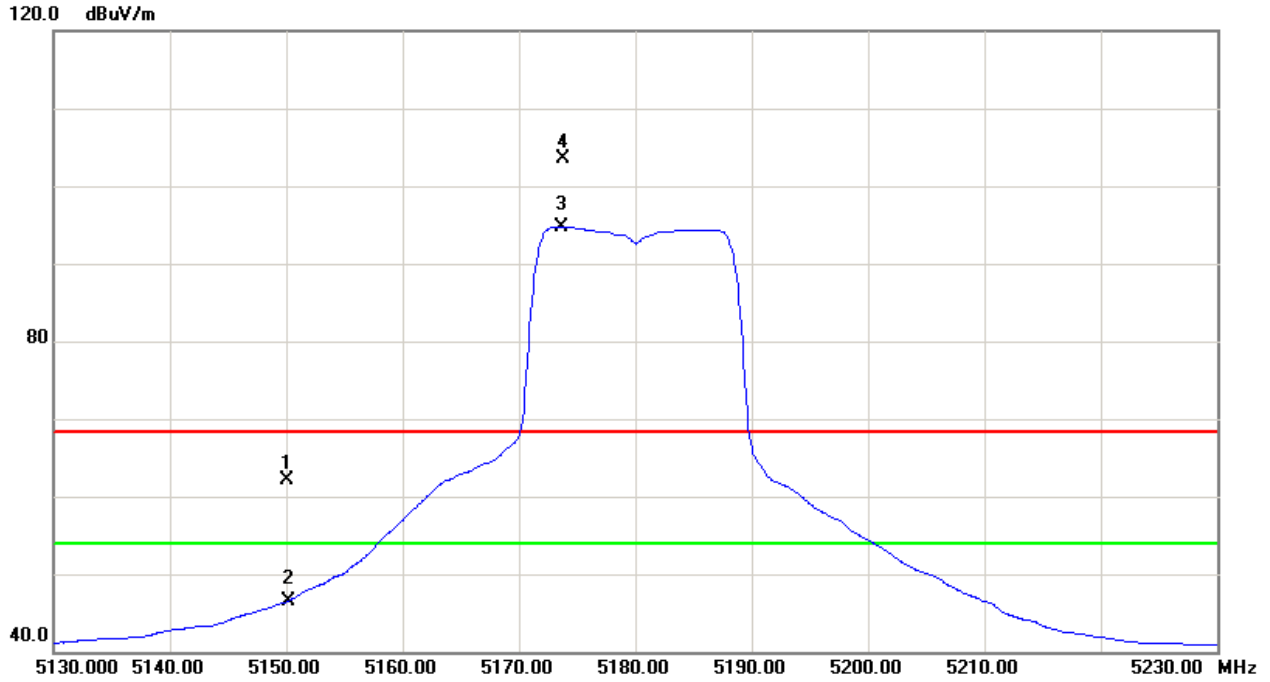



| | | | |
|----------------|---------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX A Mode 5180MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5150.00 | H | 23.75 | 8.05 | 40.09 | 63.84 | 48.14 | -40.93 | -56.63 | 68.30 | 54.00 | -27.00 | -41.30 | X/E |
| 5172.90 | H | 65.84 | 56.25 | 40.15 | 105.99 | 96.40 | 1.22 | -8.37 | | | | | X/F |
| 10360.02 | H | 38.24 | 26.10 | 13.73 | 51.97 | 39.83 | -52.80 | -64.94 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH36(Above 1000 MHz, Horizontal)

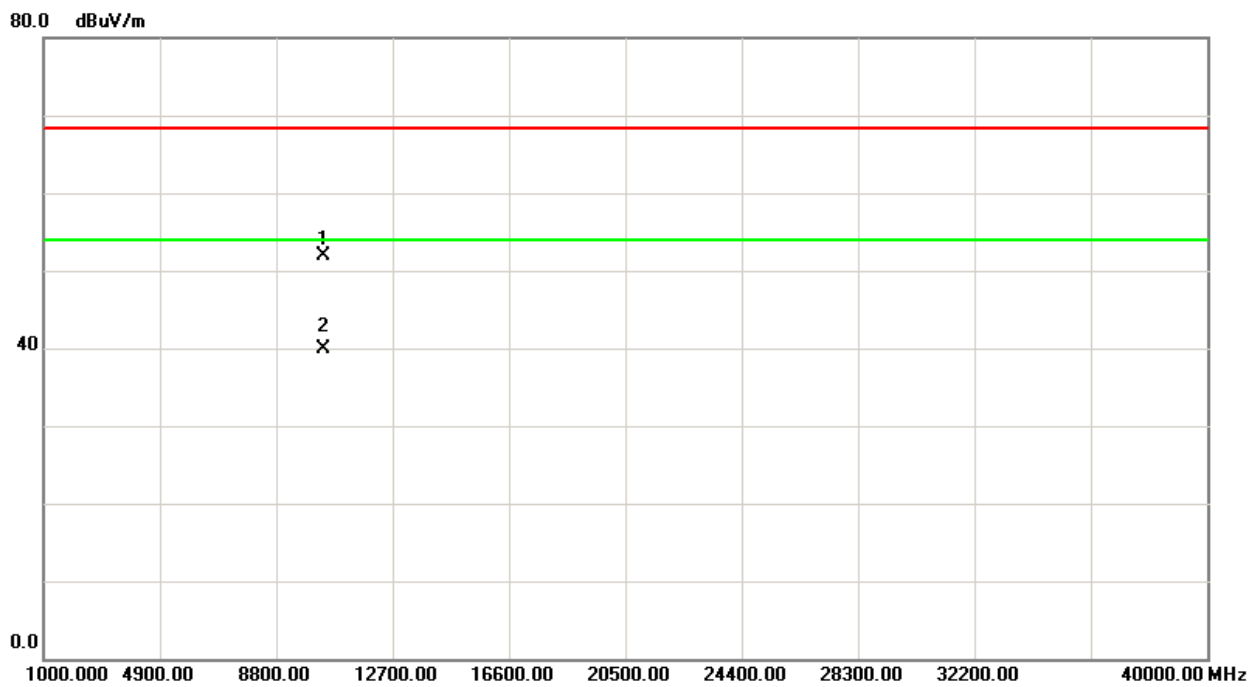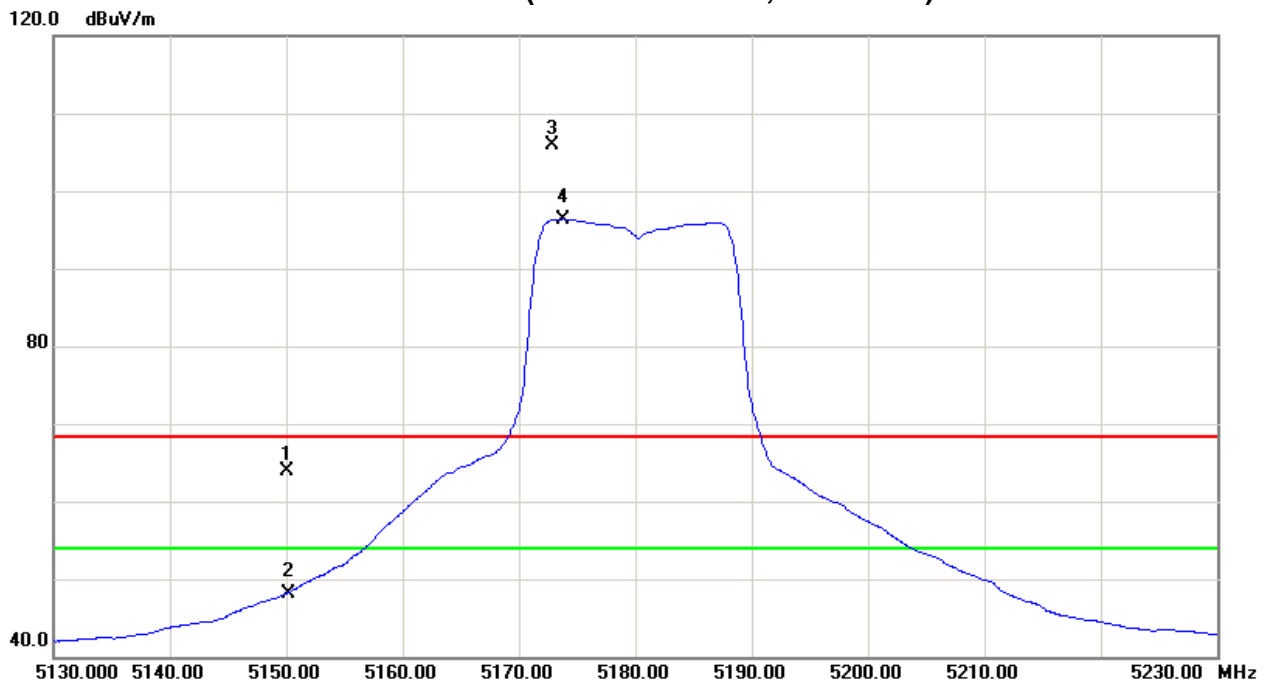



| | | | |
|----------------|---------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX A Mode 5200MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5193.50 | V | 62.62 | 54.10 | 40.21 | 102.83 | 94.31 | -1.94 | -10.46 | | | | | X/F |
| 10400.02 | V | 36.89 | 24.72 | 13.78 | 50.67 | 38.50 | -54.10 | -66.27 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency °“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH40(Above 1000 MHz, Vertical)

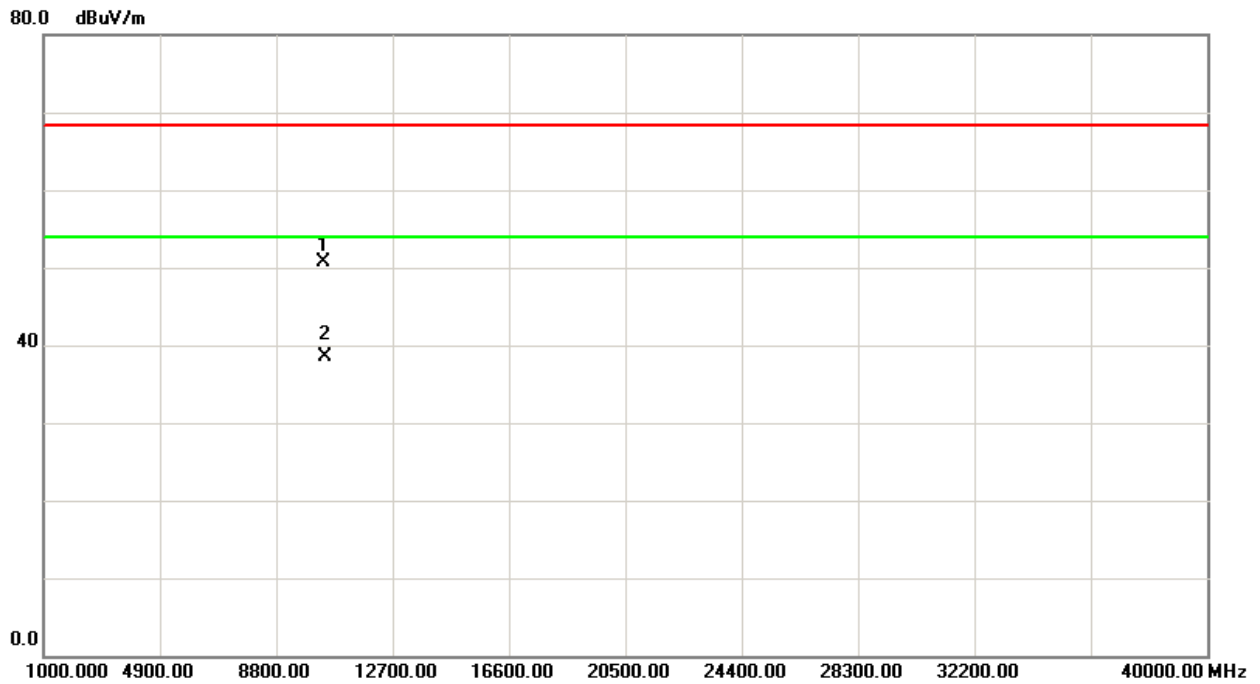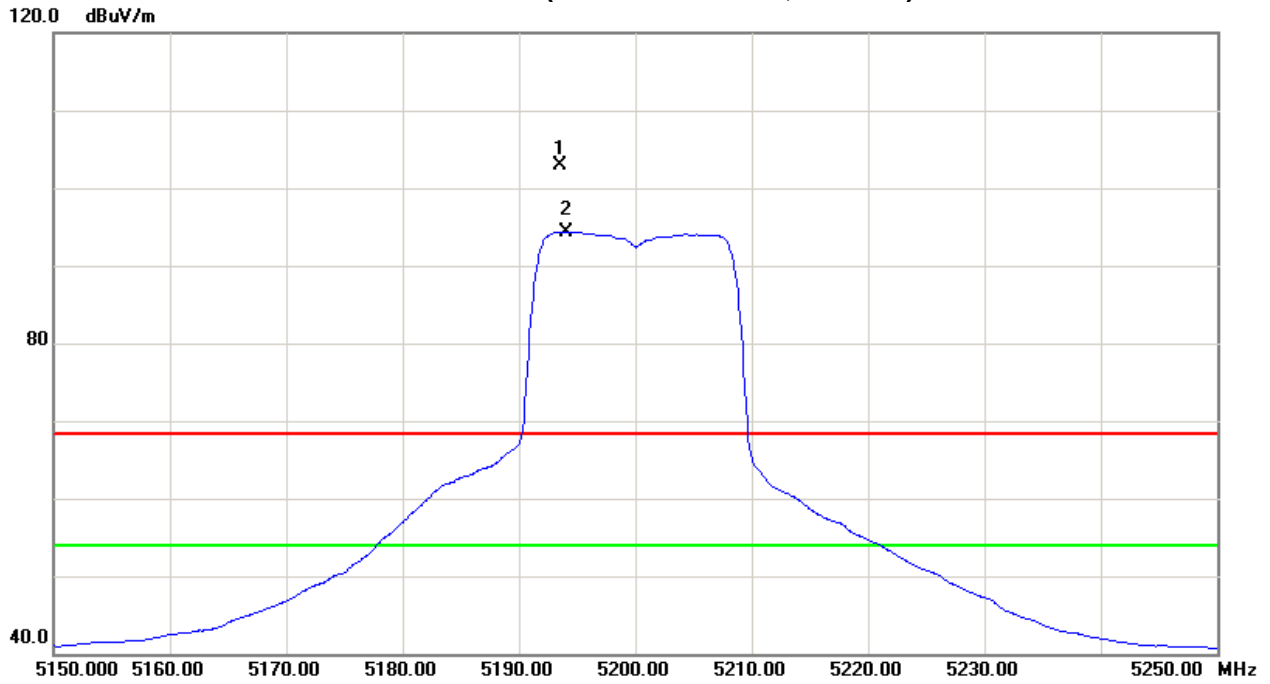



| | | | |
|----------------|---------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX A Mode 5200MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5195.50 | H | 65.84 | 56.96 | 40.21 | 106.05 | 97.17 | 1.28 | -7.60 | | | | | X/F |
| 10400.35 | H | 38.47 | 26.47 | 13.78 | 52.25 | 40.25 | -52.52 | -64.52 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH40(Above 1000 MHz, Horizontal)

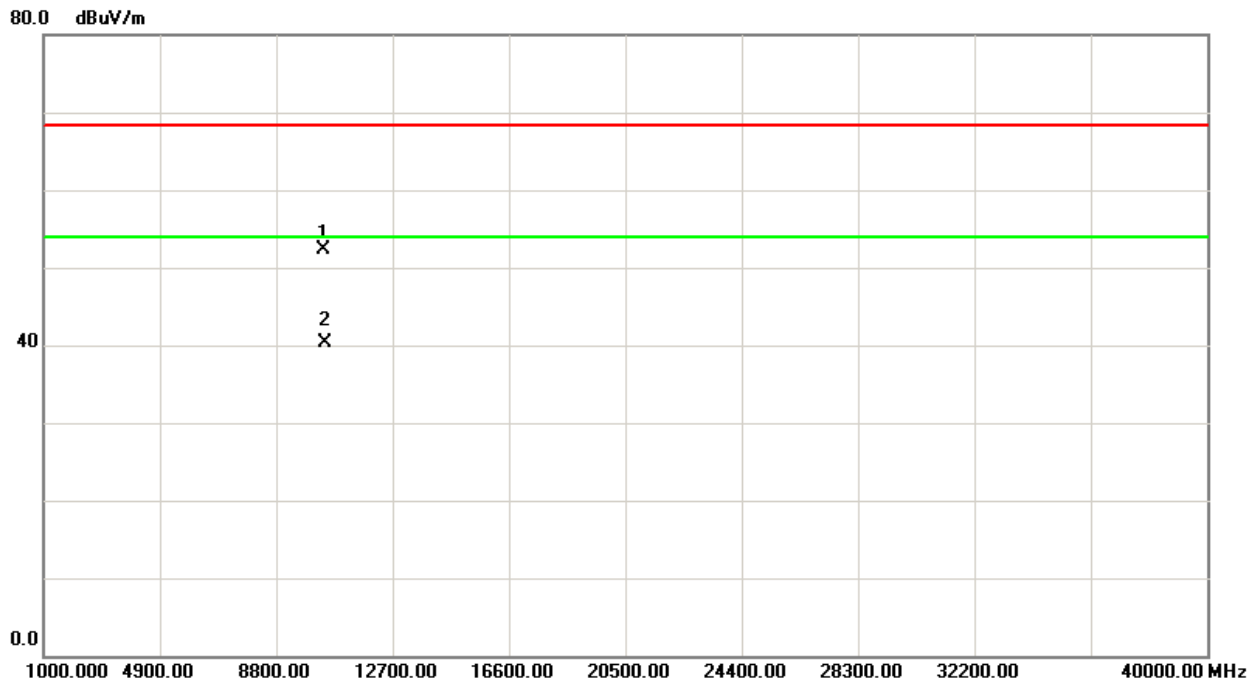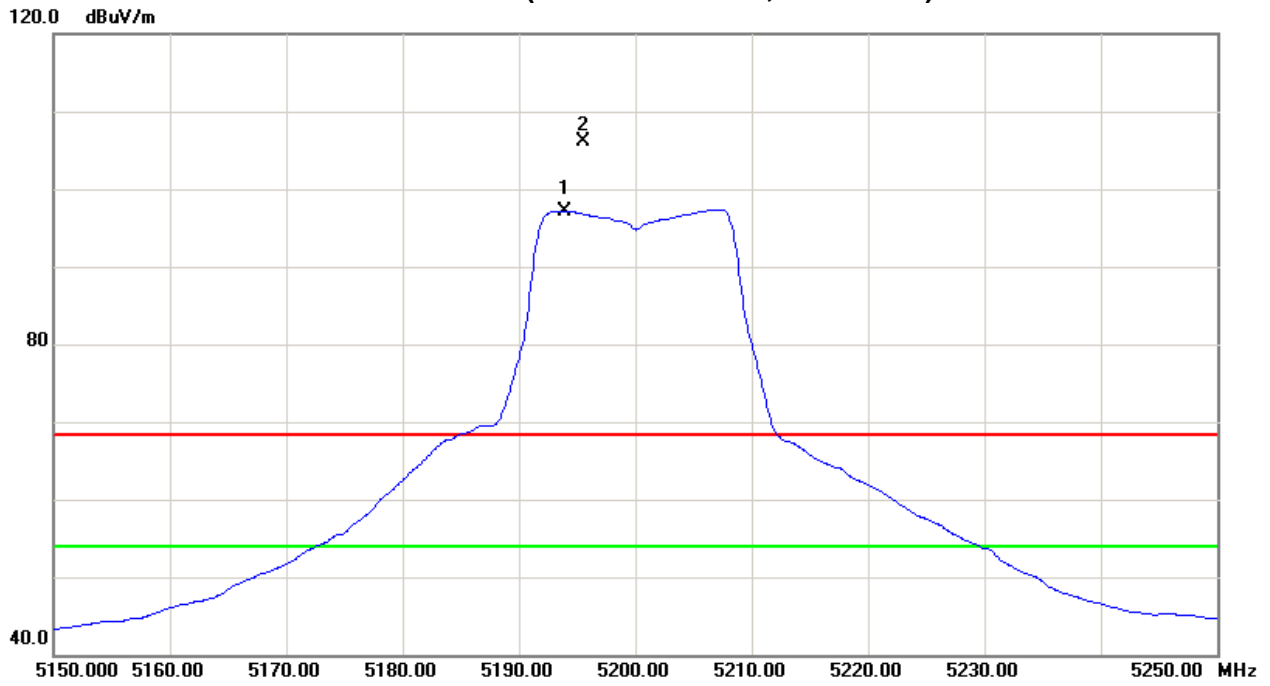



| | | | |
|----------------|---------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 52 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX A Mode 5240MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5242.90 | V | 62.94 | 54.14 | 40.33 | 103.27 | 94.47 | -1.50 | -10.30 | | | | | X/F |
| 10480.03 | V | 36.68 | 24.65 | 13.87 | 50.55 | 38.52 | -54.22 | -66.25 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency °“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH48(Above 1000 MHz, Vertical)

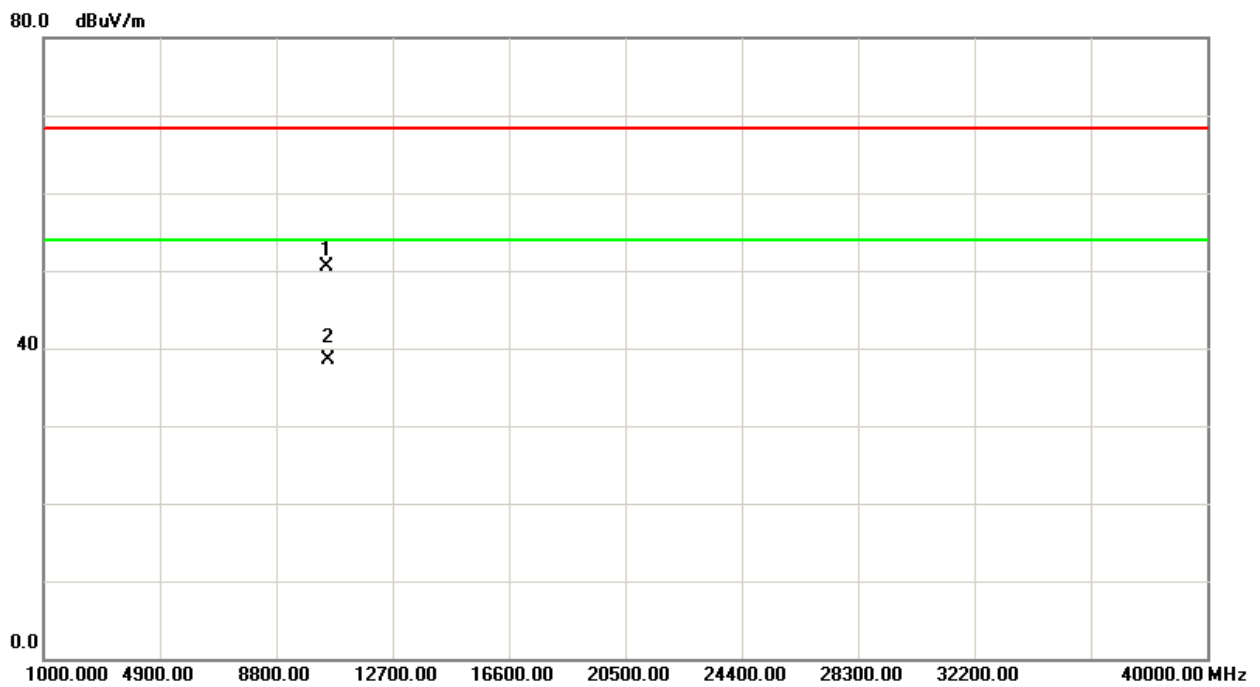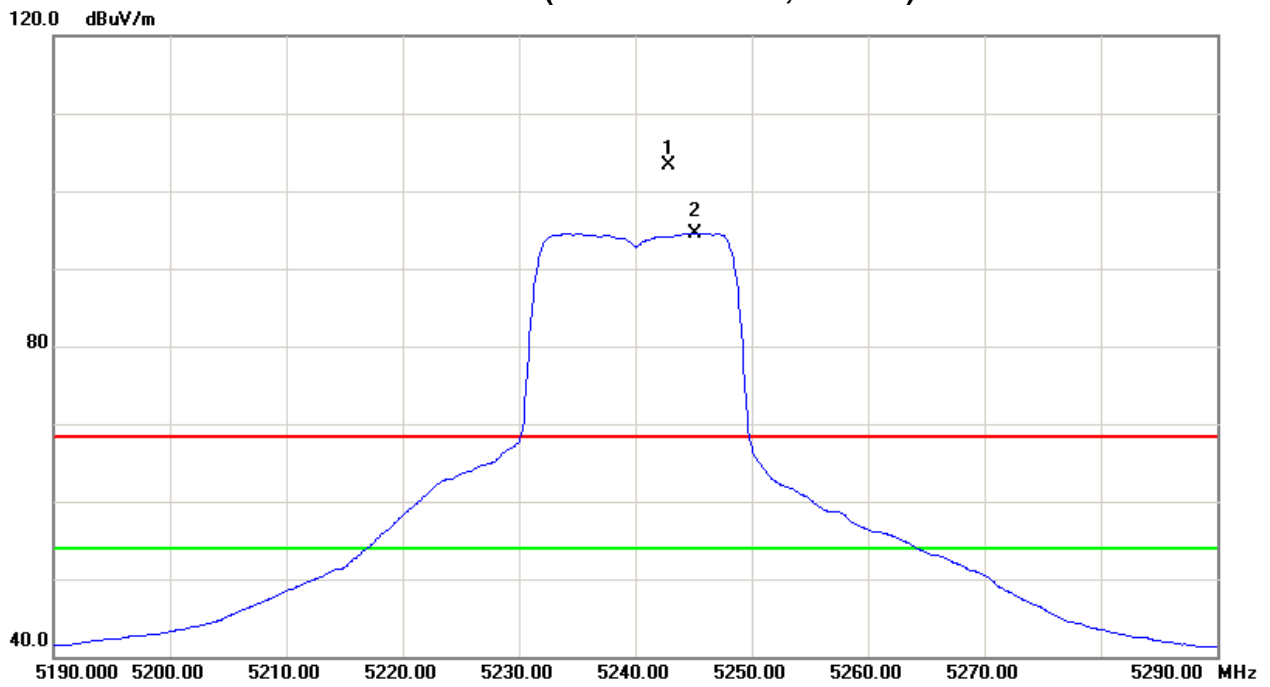



| | | | |
|----------------|---------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 52 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX A Mode 5240MHz | | |



| Freq. (MHz) | Ant. Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|------------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5232.80 | H | 65.32 | 56.60 | 40.31 | 105.63 | 96.91 | 0.86 | -7.86 | | | | | X/F |
| 10479.95 | H | 37.95 | 25.85 | 13.87 | 51.82 | 39.72 | -52.95 | -65.05 | 85.63 | 76.91 | -9.67 | -18.39 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH48(Above 1000 MHz, Horizontal)

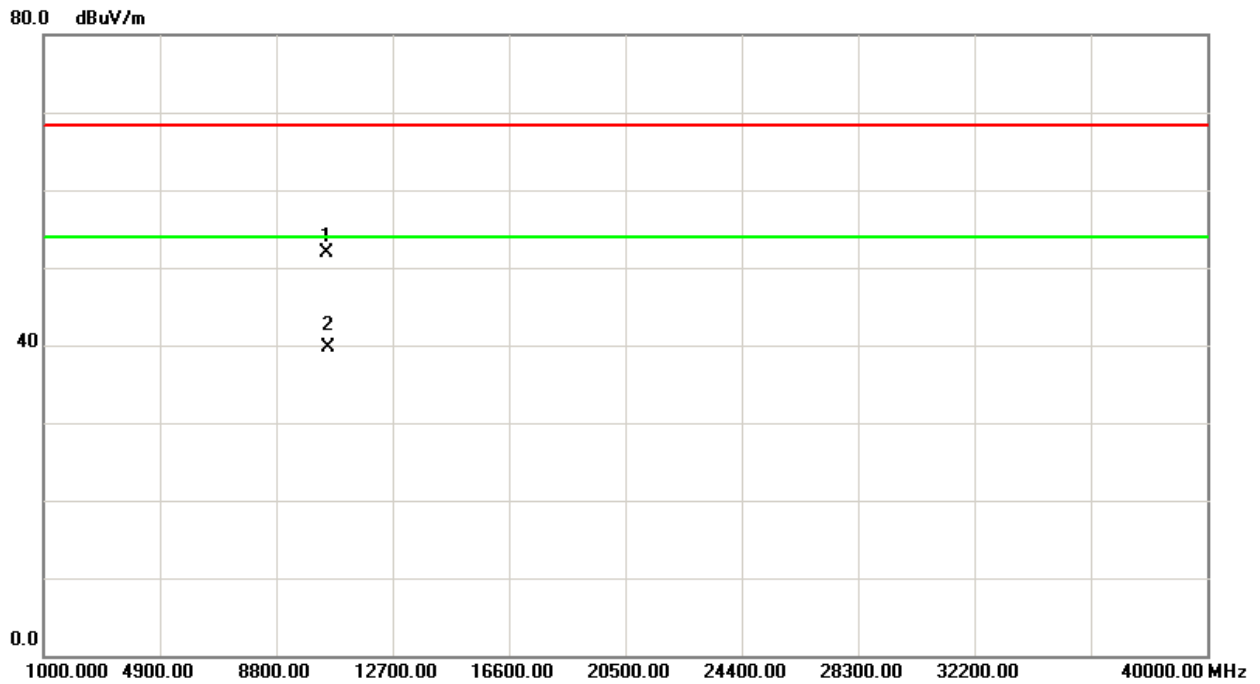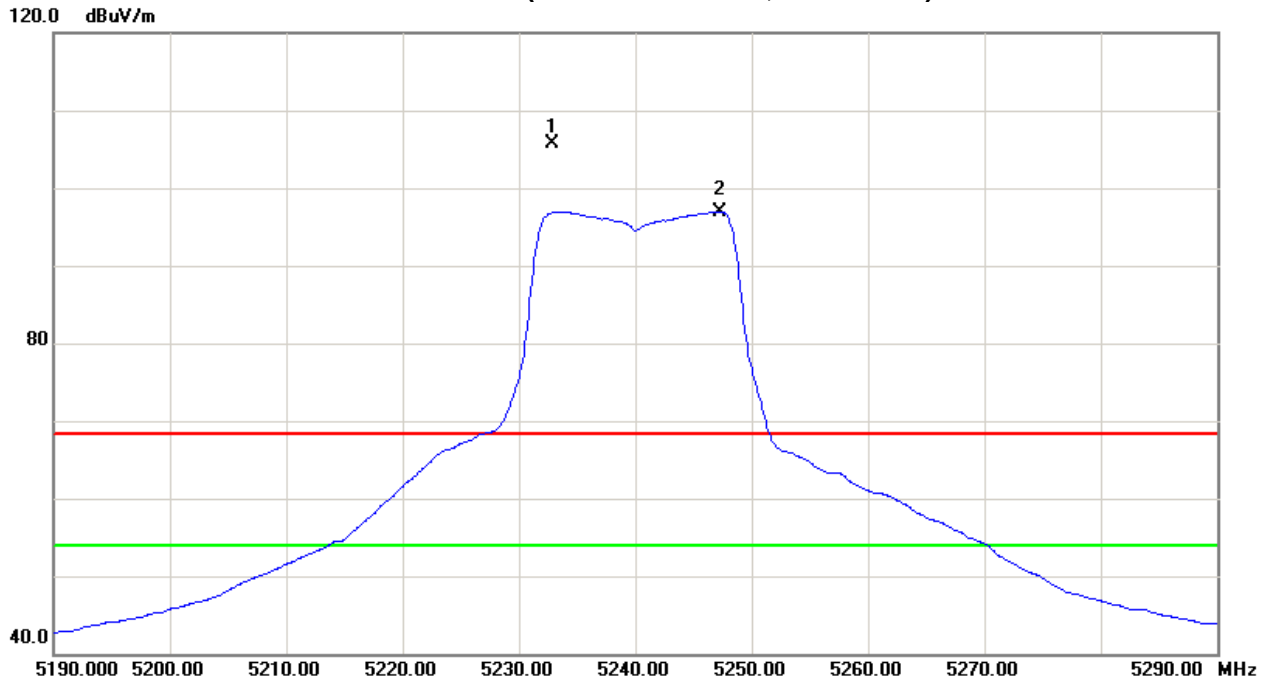



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N20 Mode 5180MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5150.00 | V | 11.24 | 2.45 | 40.09 | 51.33 | 42.54 | -53.44 | -62.23 | 68.30 | 54.00 | -27.00 | -41.30 | X/E |
| 5175.70 | V | 63.09 | 53.67 | 40.16 | 103.25 | 93.83 | -1.52 | -10.94 | | | | | X/F |
| 10359.74 | V | 36.10 | 24.13 | 13.73 | 49.83 | 37.86 | -54.94 | -66.91 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH36(Above 1000 MHz, Vertical)

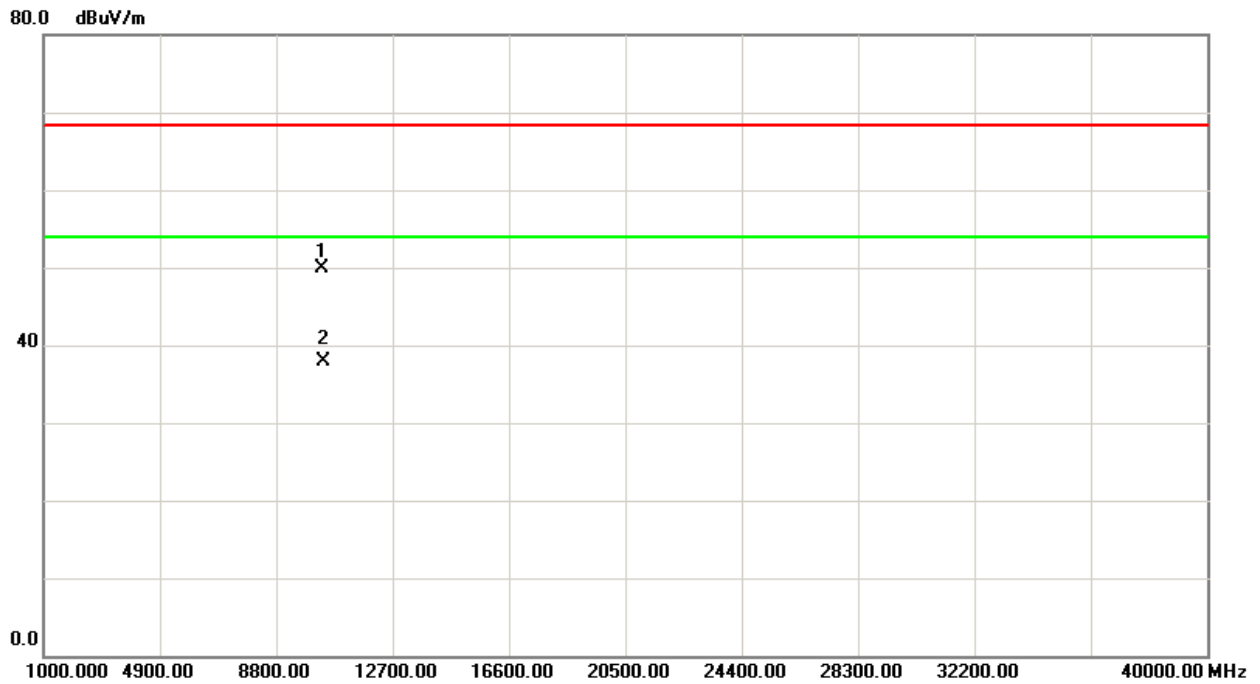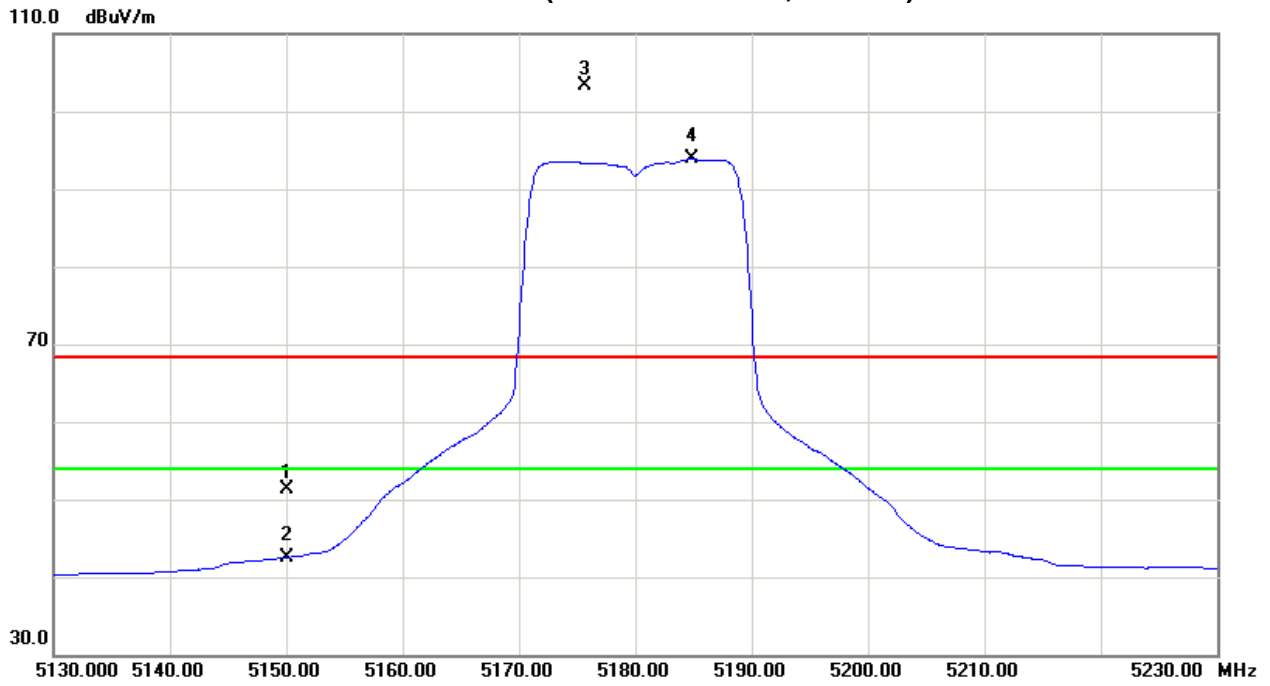



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N20 Mode 5180MHz | | |



| Freq. (MHz) | Ant. Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|------------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5150.00 | H | 12.32 | 3.66 | 40.09 | 52.41 | 43.75 | -52.36 | -61.02 | 68.30 | 54.00 | -27.00 | -41.30 | X/E |
| 5176.20 | H | 64.39 | 54.76 | 40.16 | 104.55 | 94.92 | -0.22 | -9.85 | | | | | X/F |
| 10360.12 | H | 37.85 | 26.13 | 13.73 | 51.58 | 39.86 | -53.19 | -64.91 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH36(Above 1000 MHz, Horizontal)

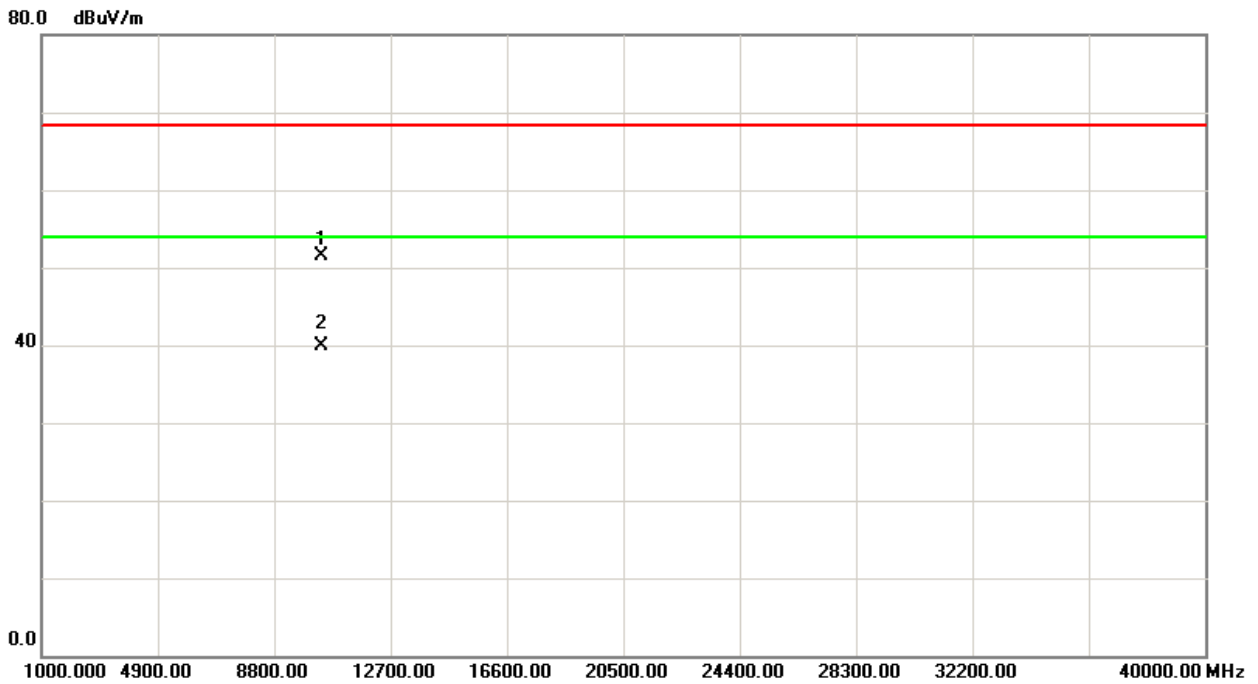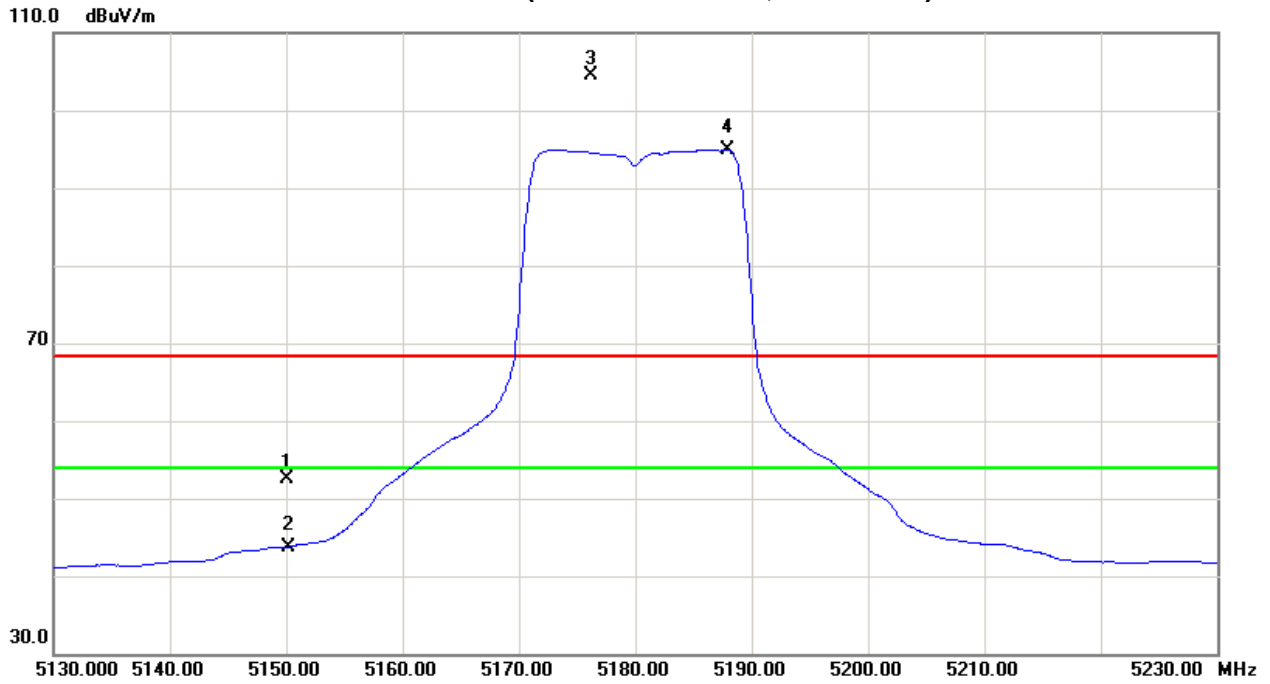



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N20 Mode 5200MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5196.00 | V | 62.87 | 52.82 | 40.21 | 103.08 | 93.03 | -1.69 | -11.74 | | | | | X/F |
| 10400.14 | V | 36.34 | 24.13 | 13.78 | 50.12 | 37.91 | -54.65 | -66.86 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency °“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH40(Above 1000 MHz, Vertical)

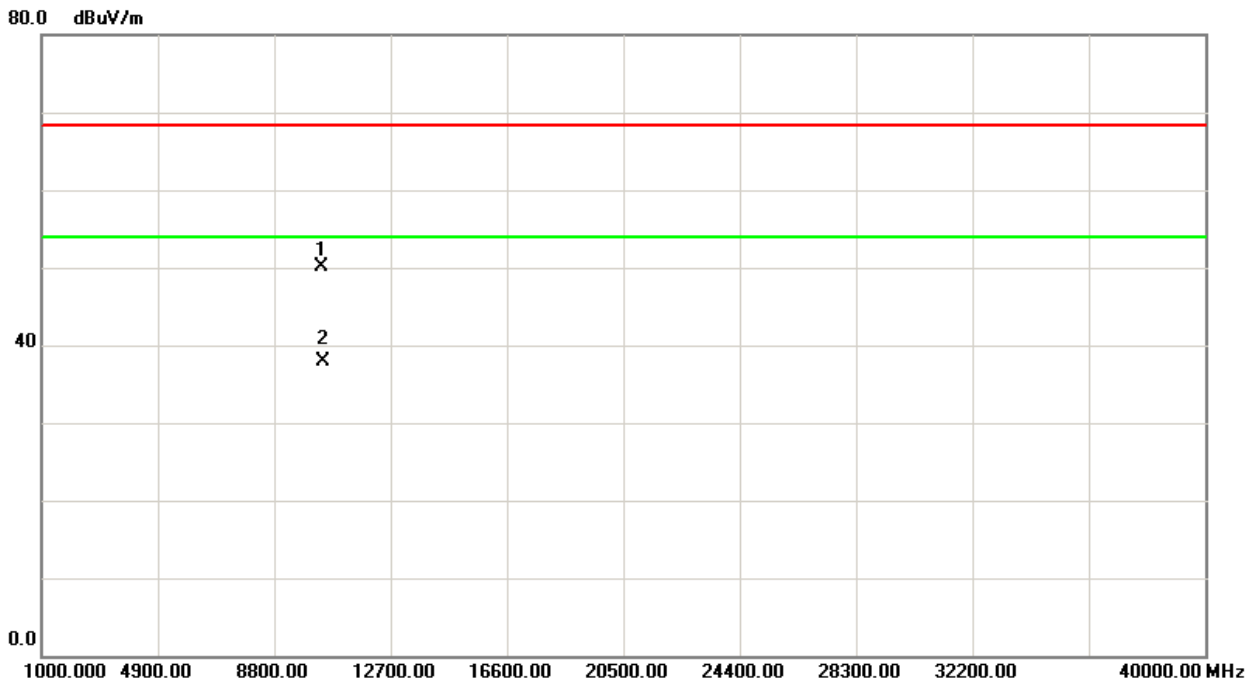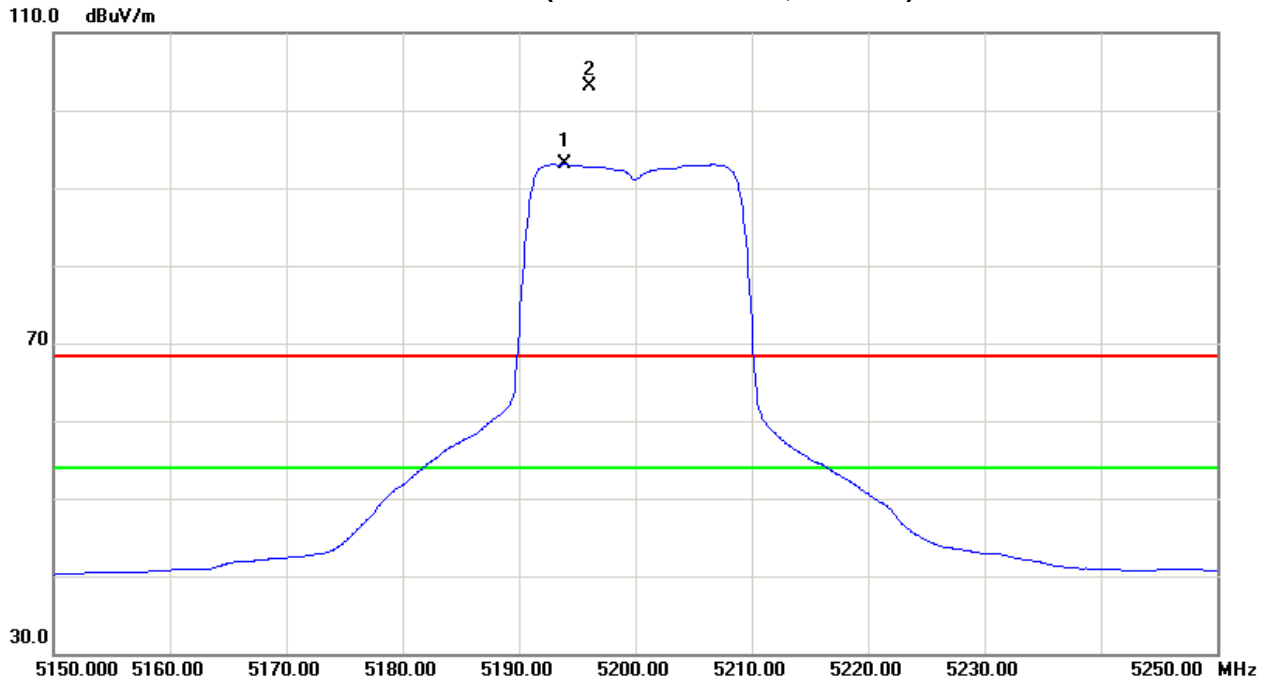



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N20 Mode 5200MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5207.90 | H | 65.61 | 54.96 | 40.21 | 105.82 | 95.17 | 1.05 | -9.60 | | | | | X/F |
| 10400.51 | H | 38.31 | 26.12 | 13.78 | 52.09 | 39.90 | -52.68 | -64.87 | 85.82 | 75.17 | -9.48 | -20.13 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH40(Above 1000 MHz, Horizontal)

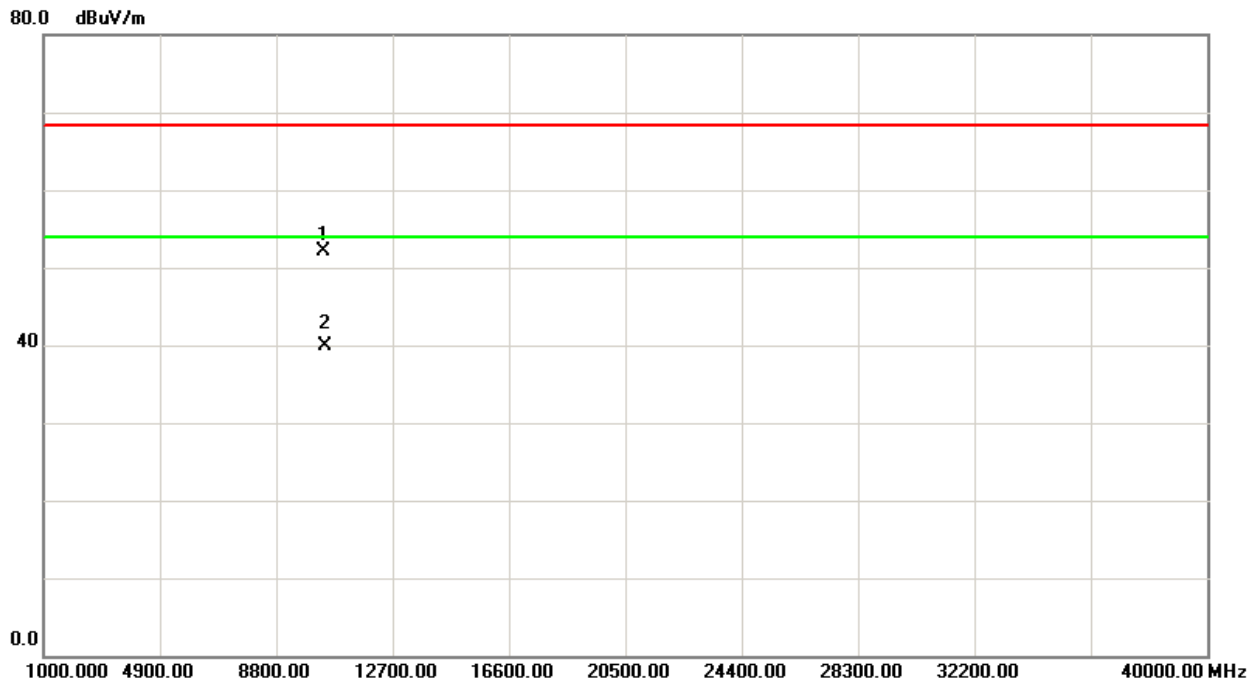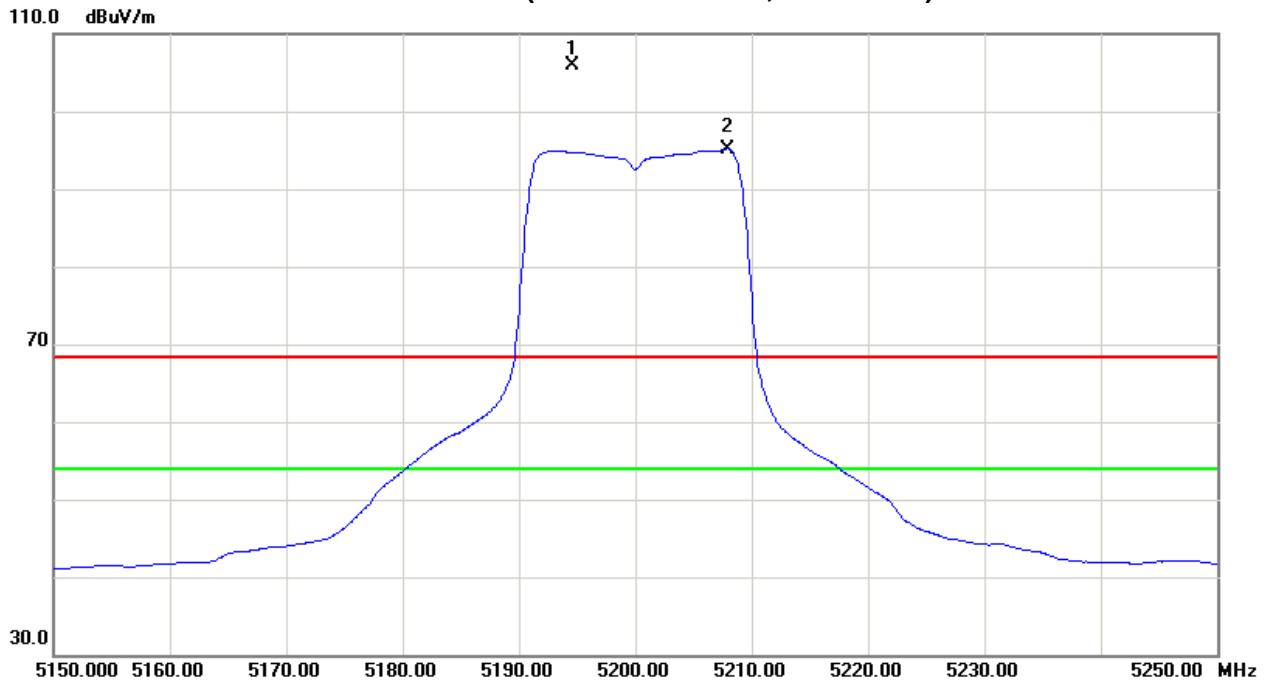



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 52 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N20 Mode 5240MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5234.40 | V | 64.02 | 53.46 | 40.31 | 104.33 | 93.77 | -0.44 | -11.00 | | | | | X/F |
| 10480.15 | V | 36.14 | 24.37 | 13.87 | 50.01 | 38.24 | -54.76 | -66.53 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency °“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH48(Above 1000 MHz, Vertical)

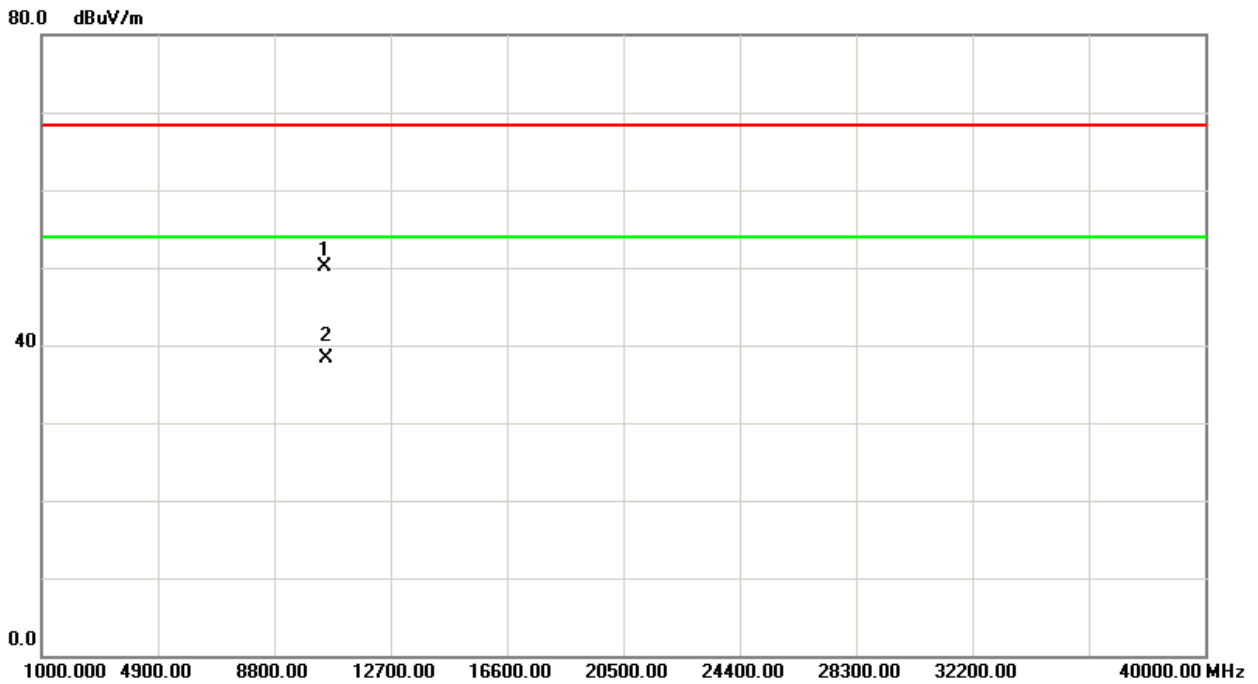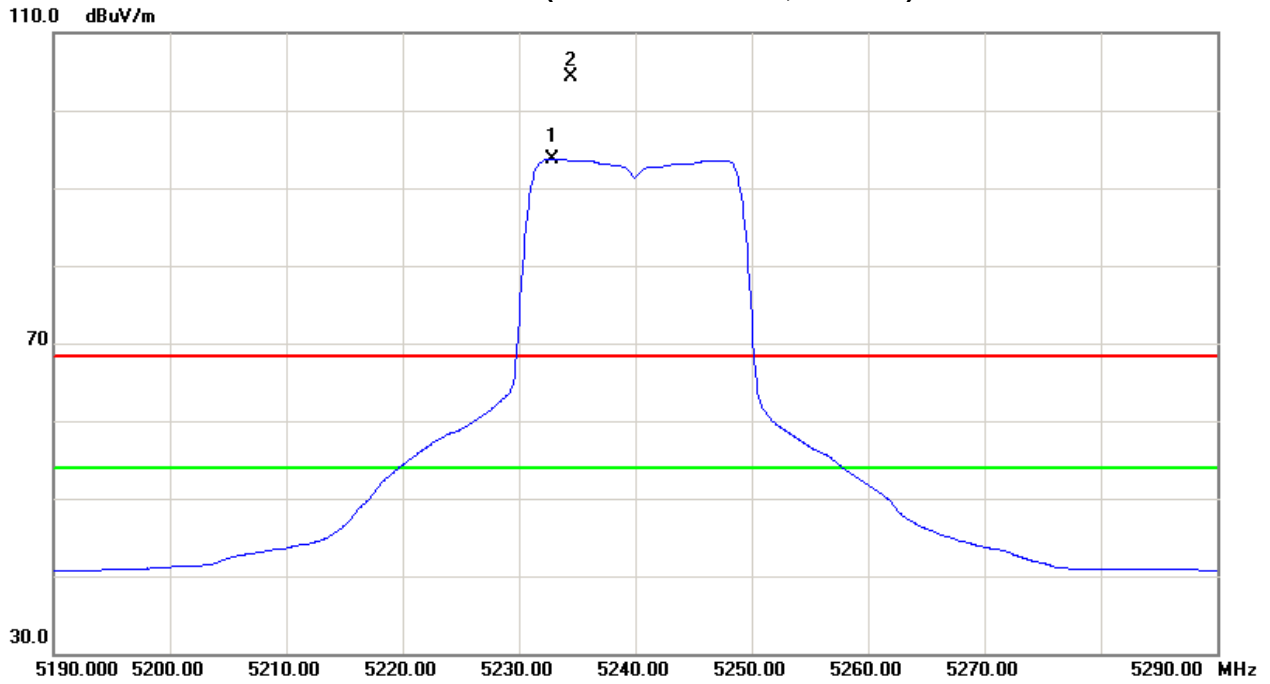



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 52 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N20 Mode 5240MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5235.60 | H | 65.04 | 55.28 | 40.31 | 105.35 | 95.59 | 0.58 | -9.18 | | | | | X/F |
| 10479.98 | H | 37.14 | 25.34 | 13.87 | 51.01 | 39.21 | -53.76 | -65.56 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH48(Above 1000 MHz, Horizontal)

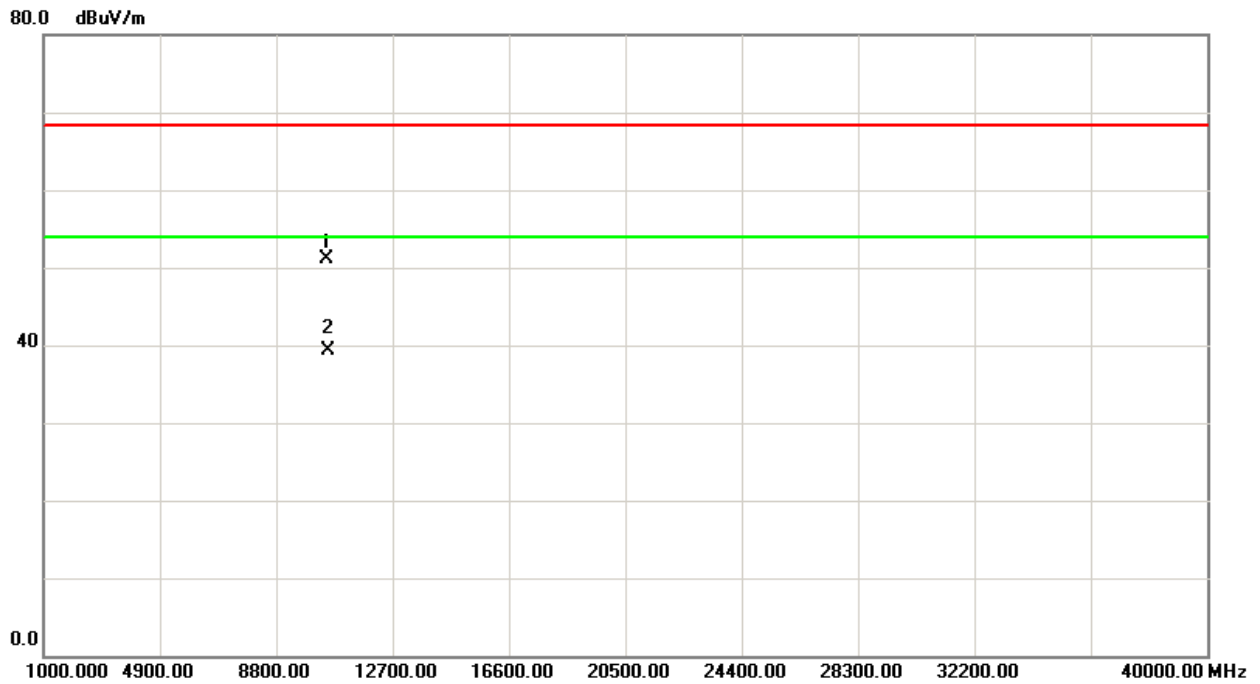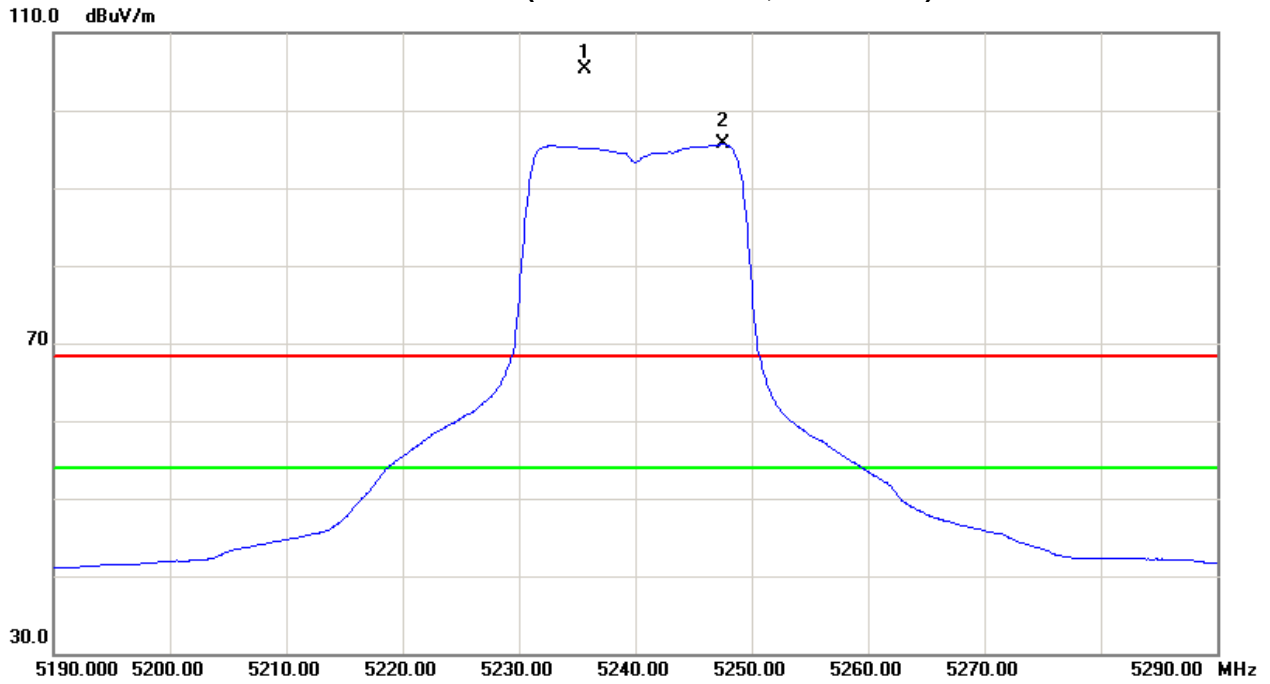



Neutron Engineering Inc.

| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N40 Mode 5190MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5150.00 | V | 17.18 | 6.76 | 40.09 | 57.27 | 46.85 | -47.50 | -57.92 | 68.30 | 54.00 | -27.00 | -41.30 | X/E |
| 5191.40 | V | 61.03 | 50.74 | 40.19 | 101.22 | 90.93 | -3.55 | -13.84 | | | | | X/F |
| 10382.28 | V | 34.34 | 22.38 | 13.76 | 48.10 | 36.14 | -56.67 | -68.63 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH38(Above 1000 MHz, Vertical)

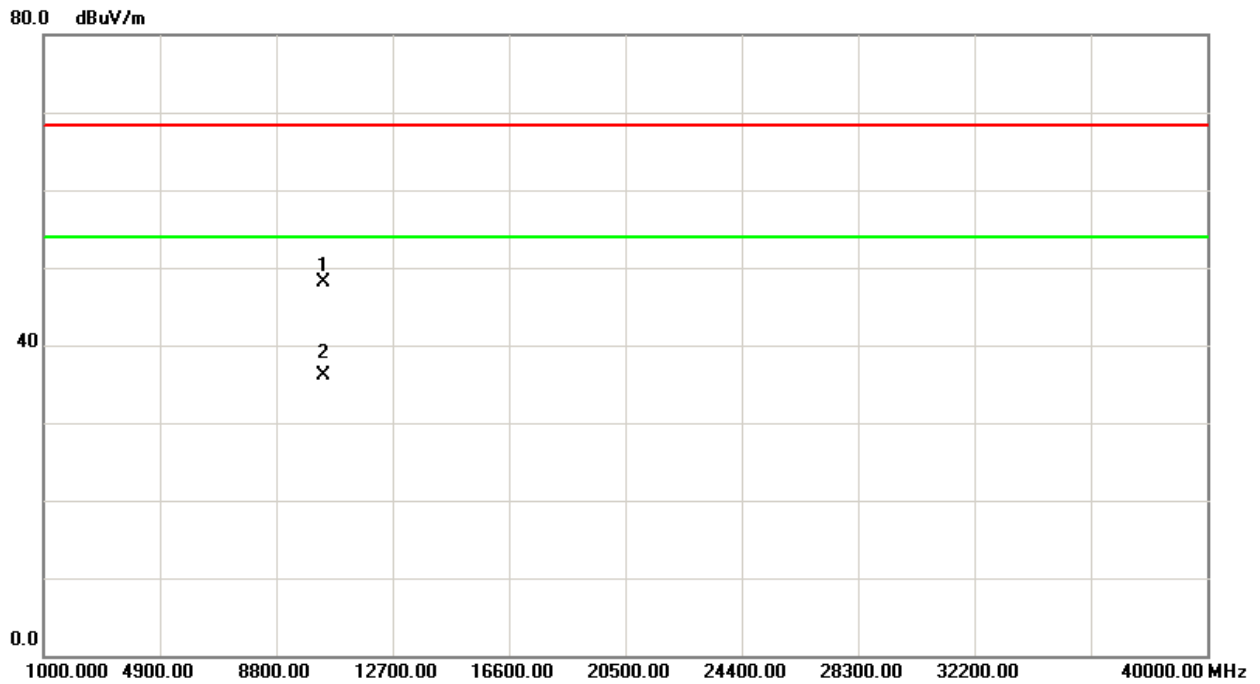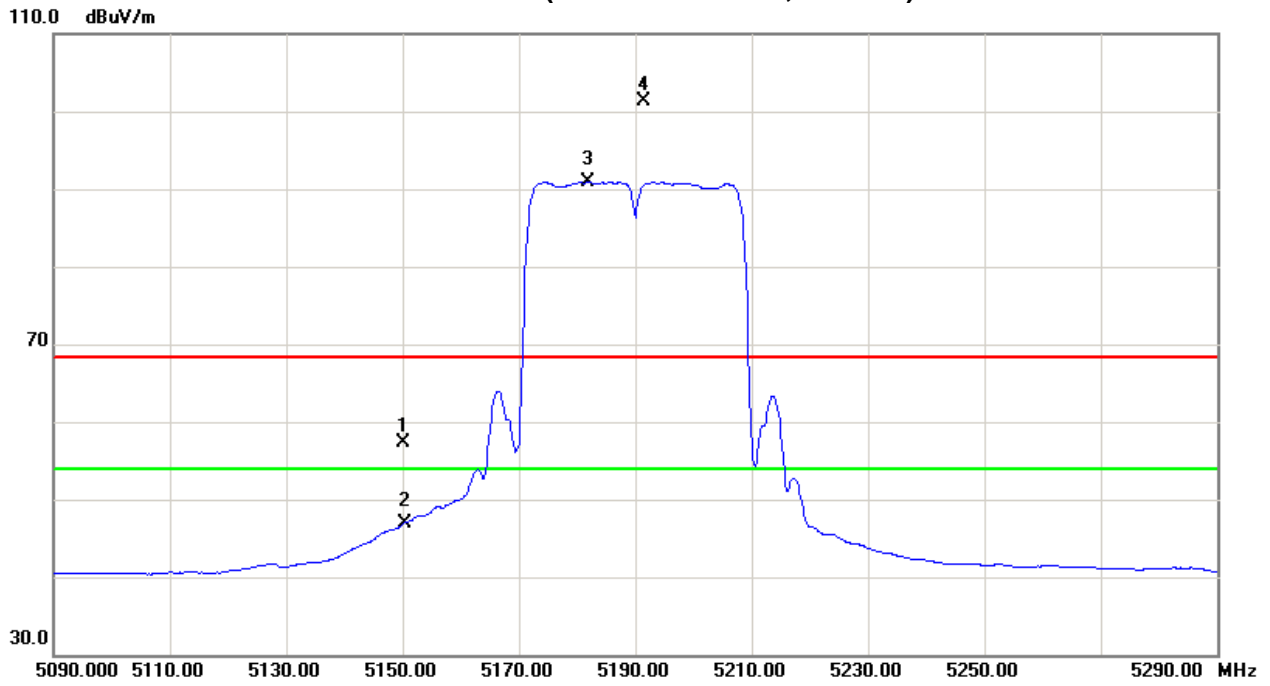



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N40 Mode 5190MHz | | |



| Freq. (MHz) | Ant. Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|------------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5150.00 | H | 18.44 | 8.65 | 40.09 | 58.53 | 48.74 | -46.24 | -56.03 | 68.30 | 54.00 | -27.00 | -41.30 | X/E |
| 5183.00 | H | 63.50 | 51.19 | 40.18 | 103.68 | 91.37 | -1.09 | -13.40 | | | | | X/F |
| 10385.27 | H | 35.24 | 24.42 | 13.76 | 49.00 | 38.18 | -55.77 | -66.59 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH38(Above 1000 MHz, Horizontal)

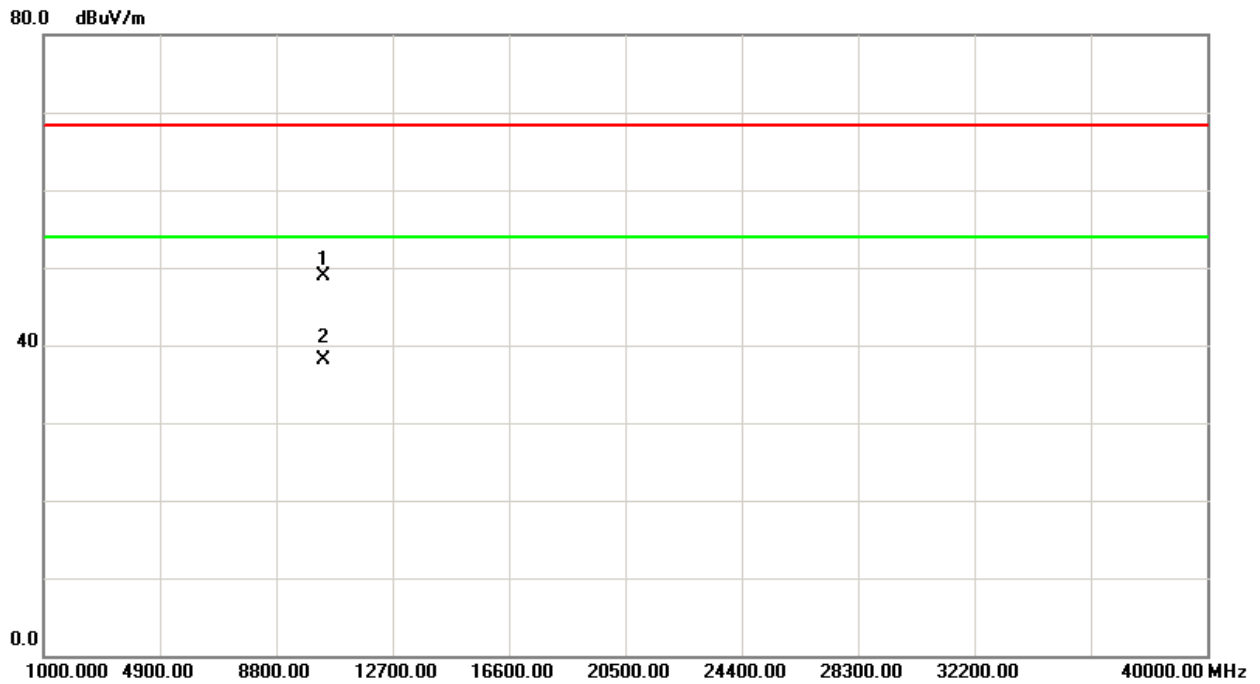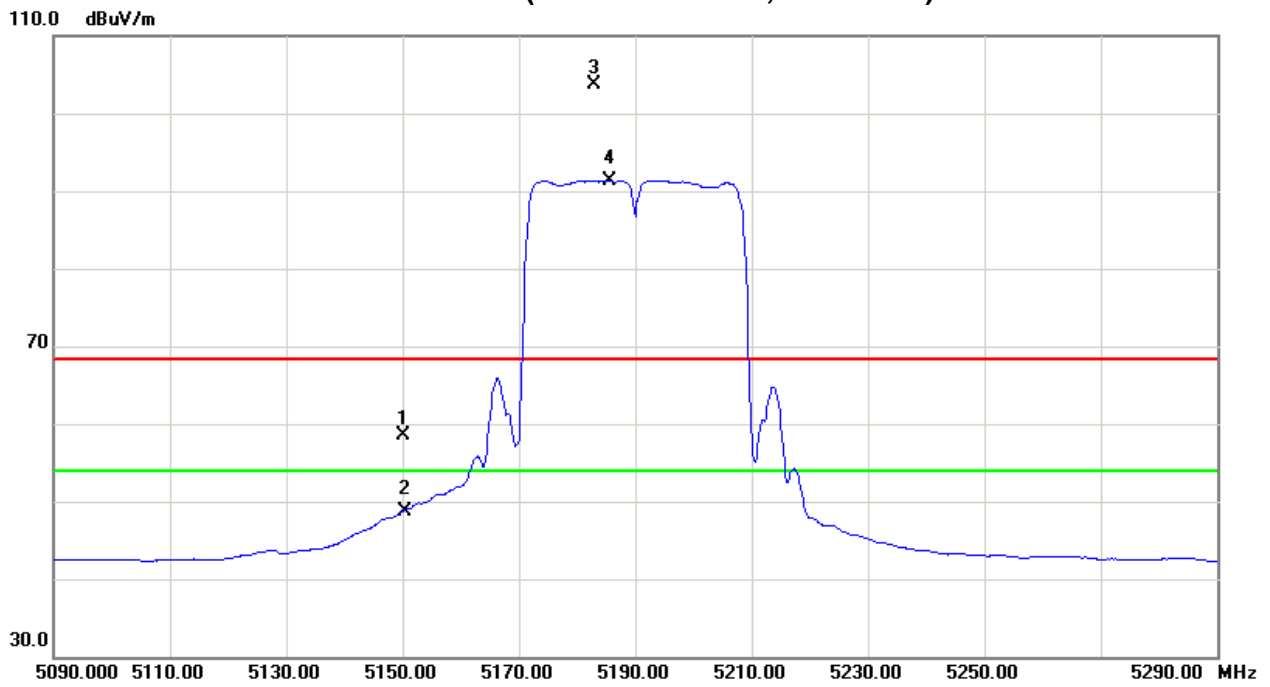



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N40 Mode 5230MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5237.40 | V | 61.06 | 51.29 | 40.32 | 101.38 | 91.61 | -3.39 | -13.16 | | | | | X/F |
| 10468.16 | V | 34.39 | 23.46 | 13.85 | 48.24 | 37.31 | -56.53 | -67.46 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency °“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH46(Above 1000 MHz, Vertical)

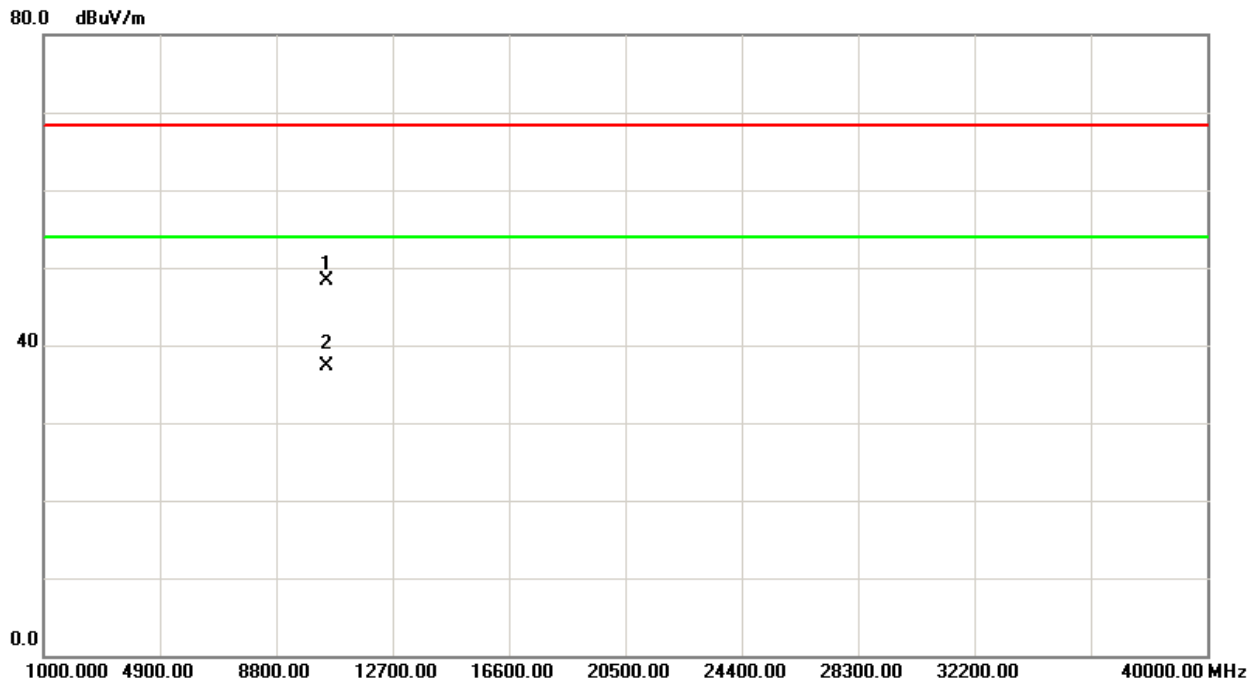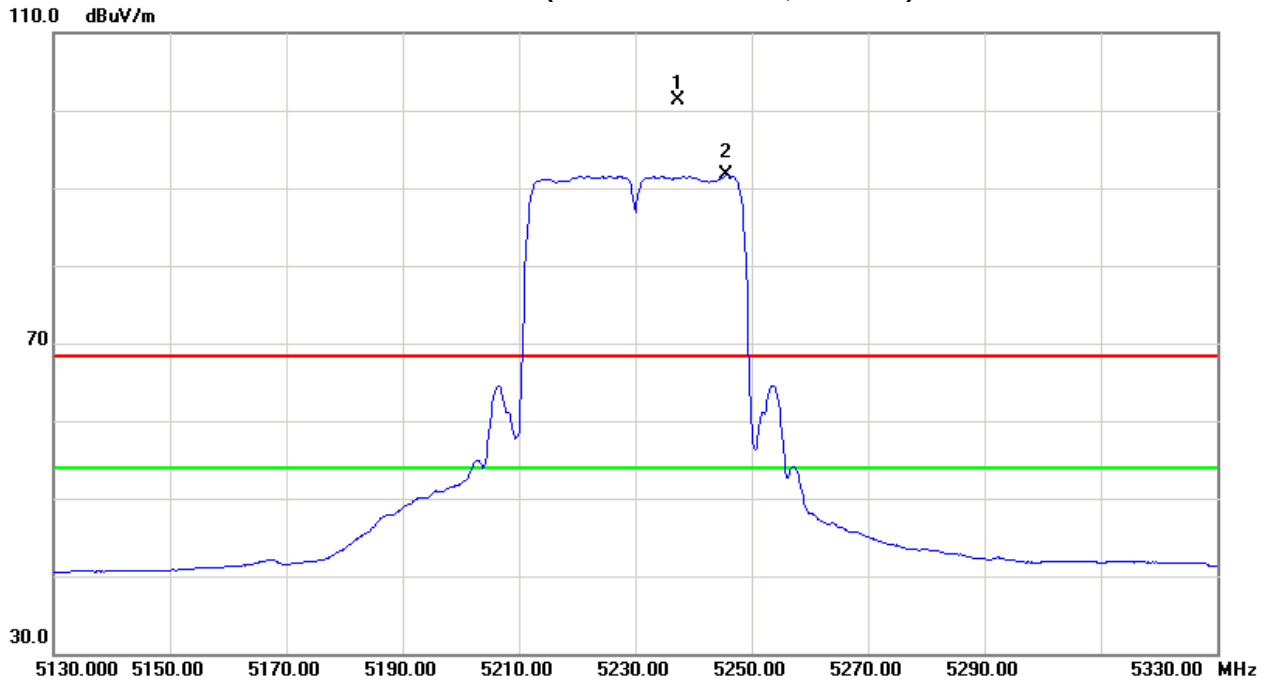



| | | | |
|----------------|-----------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/ TX N40 Mode 5230MHz | | |



| Freq. (MHz) | Ant.Pol. H/V | Reading | | Ant./CF CF(dB) | Act.(dBuV/m) | | Act.(dBm) | | Limit(dBuV/m) | | Limit(dBm) | | Note |
|----------------|-----------------|----------------|--------------|-------------------|--------------|-------|-----------|--------|---------------|-------|------------|--------|------|
| | | Peak (dBuV) | AV (dBuV) | | Peak | AV | Peak | AV | Peak | AV | Peak | AV | |
| 5246.40 | H | 61.85 | 51.23 | 40.34 | 102.19 | 91.57 | -2.58 | -13.20 | | | | | X/F |
| 10462.35 | H | 36.17 | 24.65 | 13.85 | 50.02 | 38.50 | -54.75 | -66.27 | 68.30 | 54.00 | -27.00 | -41.30 | X/H |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis : X
Band 1/CH46(Above 1000 MHz, Horizontal)

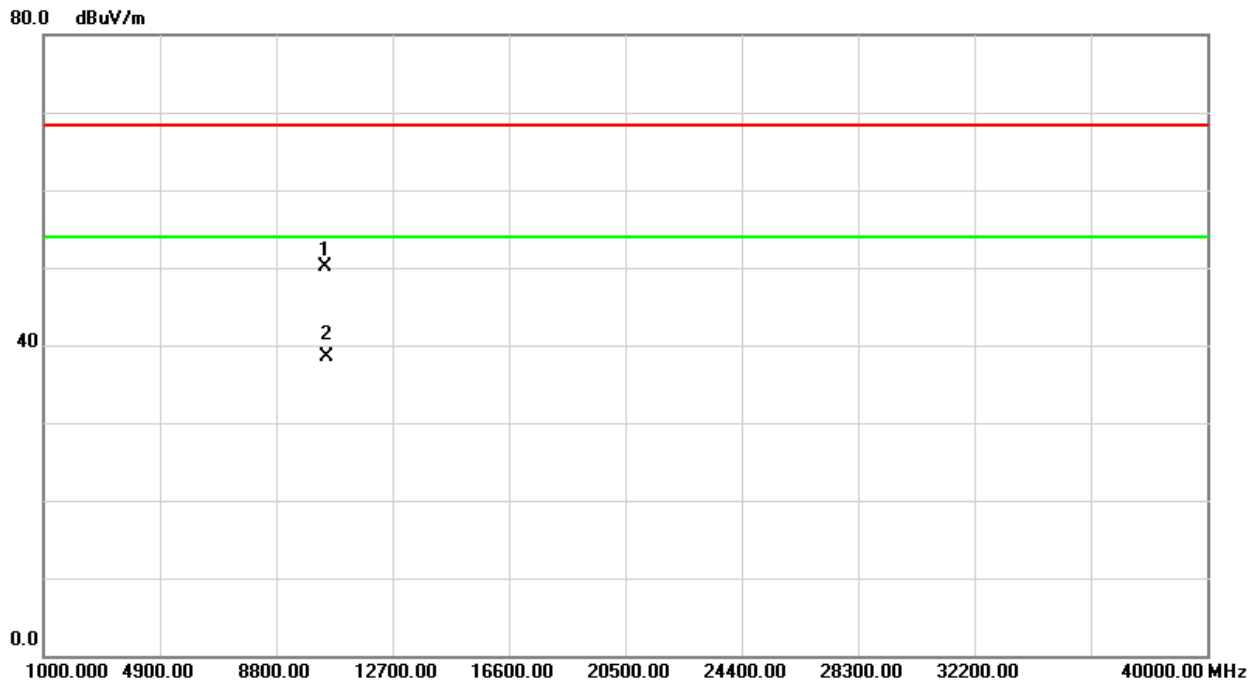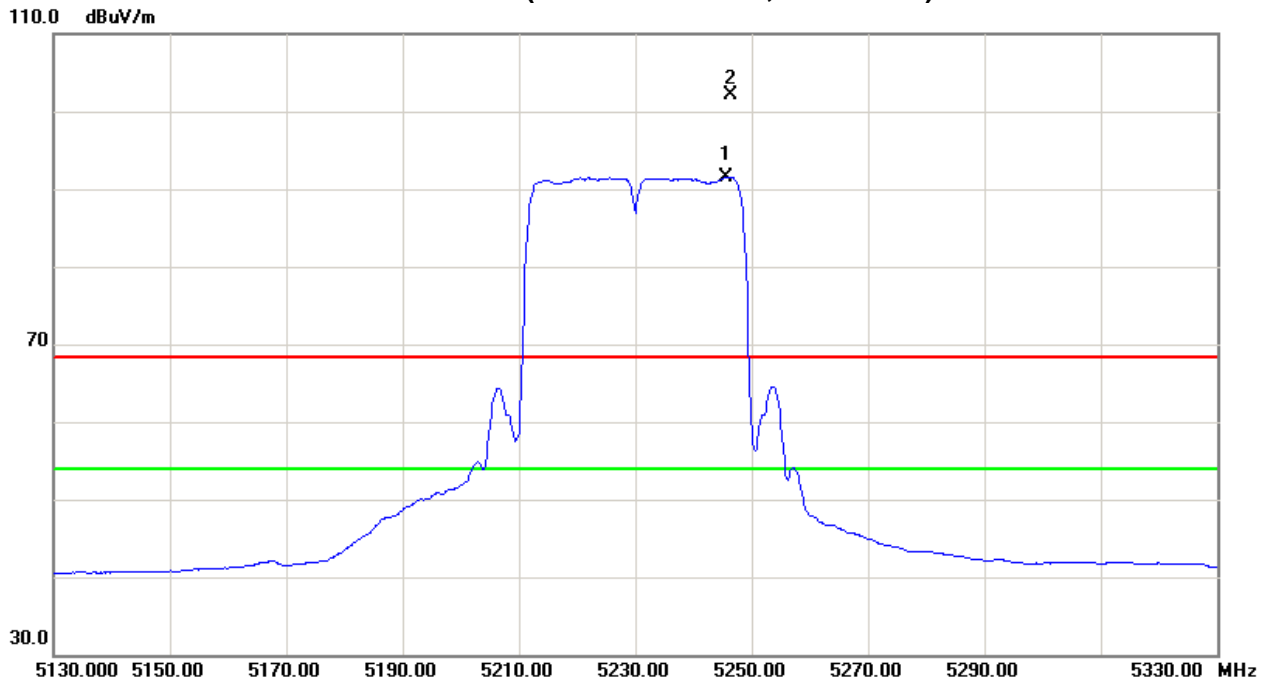



5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|-----------------------|-------|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| 26 dB Bandwidth | ----- | 5150MHz~5250 | PASS |

5.1.1 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Next Calibration |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1 | Spectrum Analyzer | R&S | FSP_40 | 100129 | Nov.26.2012 | Nov.26.2013 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is One Year.

5.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameters | Setting |
|---------------------|------------------|
| Attenuation | Auto |
| Span Frequency | > 26dB Bandwidth |
| RB | 300 kHz |
| VB | 1000 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP



5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.6 TEST RESULTS

| | | | |
|----------------|------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX A Mode /CH36, CH40, CH48 | | |


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH36 | 5180 | 25.30 | 17.30 |
| CH40 | 5200 | 24.80 | 17.30 |
| CH48 | 5240 | 23.40 | 17.30 |

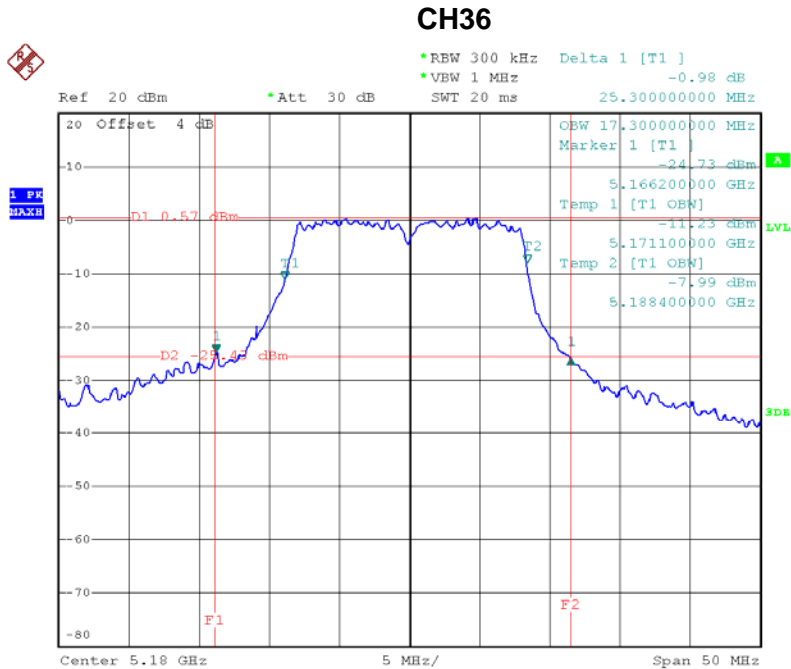

Date: 2.JUL.2013 14:04:08




CH40

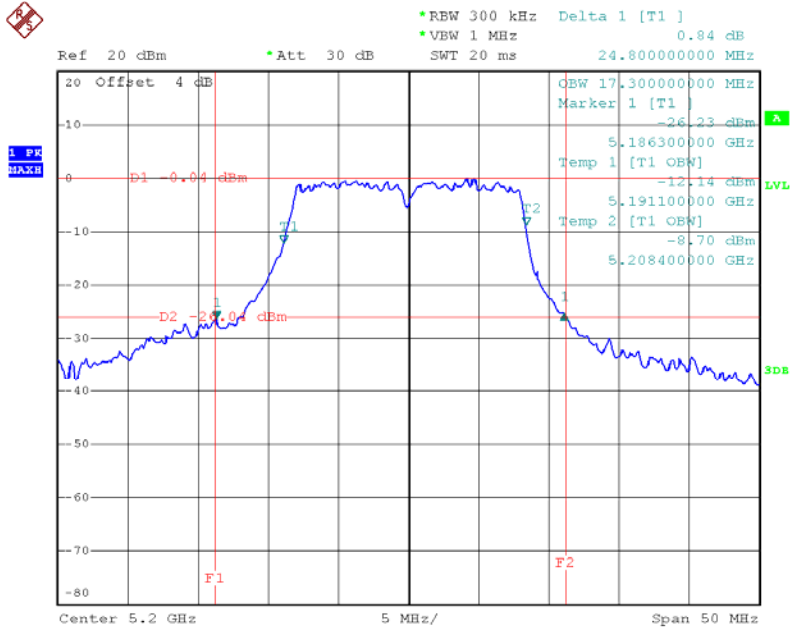

Date: 2.JUL.2013 14:24:49

CH48

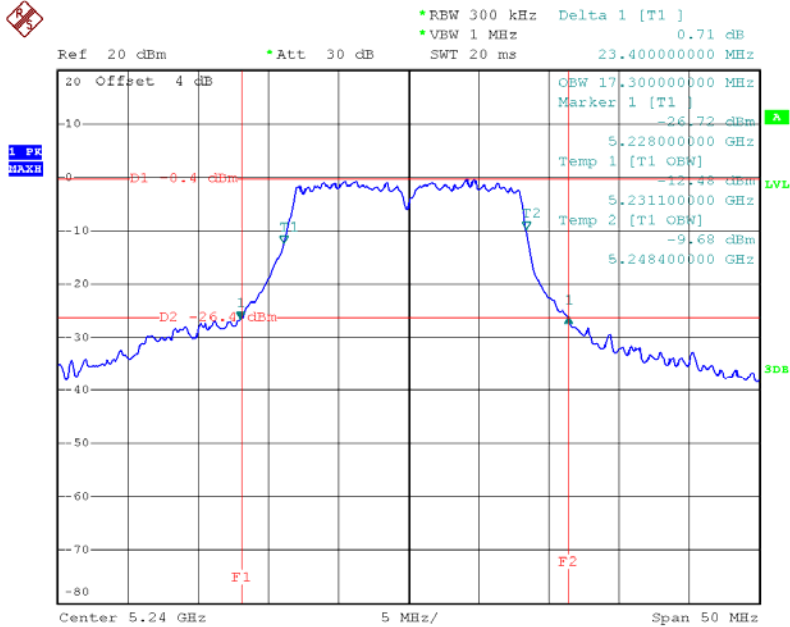


Date: 2.JUL.2013 14:30:40



| | | | |
|----------------|-------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TXN20 Mode /CH36, CH40, CH48 | | |


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH36 | 5180 | 23.90 | 18.20 |
| CH40 | 5200 | 23.50 | 18.20 |
| CH48 | 5240 | 23.80 | 18.20 |

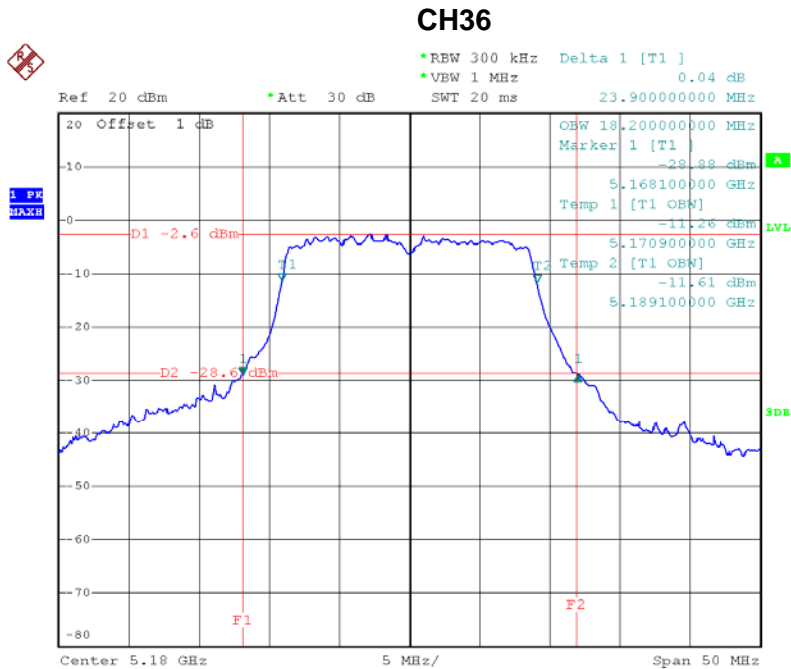

Date: 2.JUL.2013 15:36:42




CH40

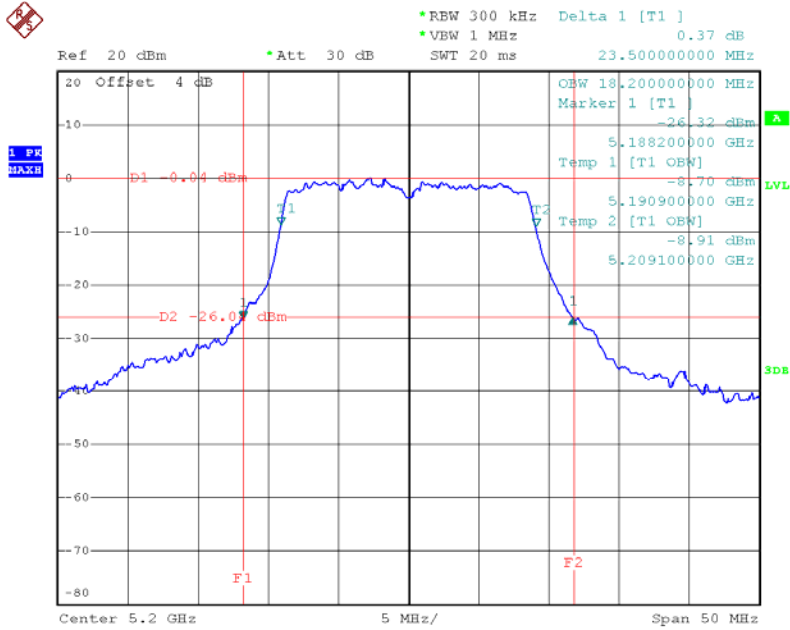

Date: 2.JUL.2013 15:41:23

CH48

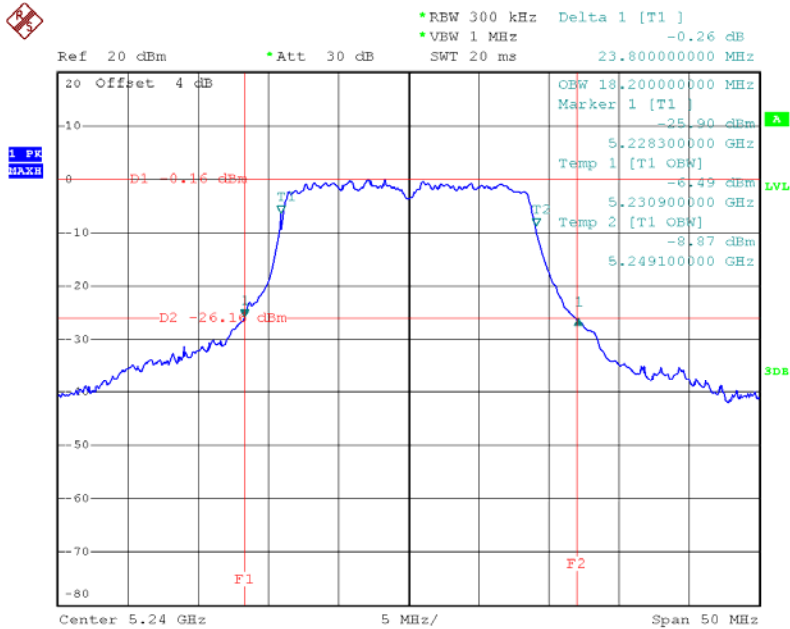


Date: 2.JUL.2013 15:45:15



| | | | |
|----------------|-------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TXN40 Mode /CH38, CH46 | | |


| Channel | Frequency (MHz) | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|----------------------|------------------------------|
| CH38 | 5190 | 40.40 | 36.20 |
| CH46 | 5230 | 40.40 | 36.20 |

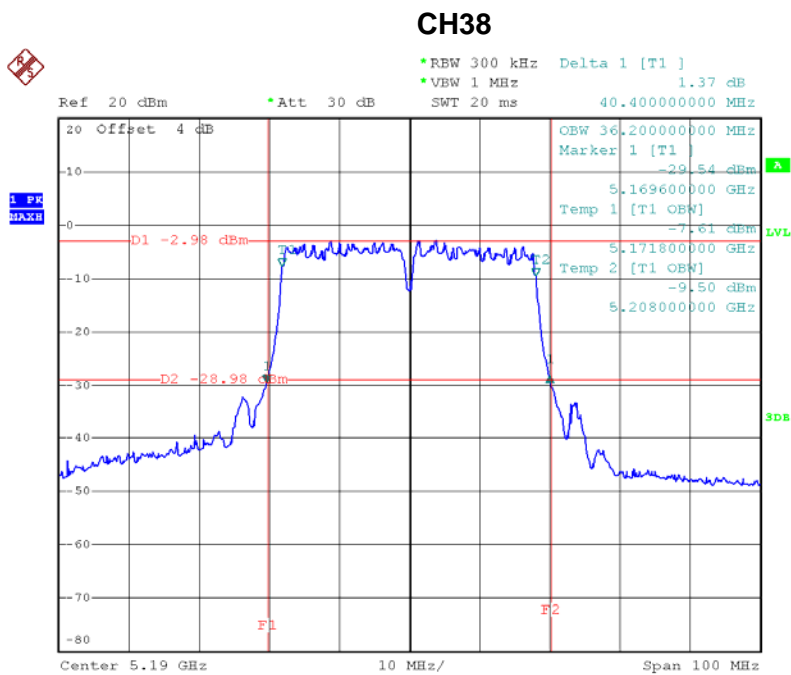

Date: 2.JUL.2013 16:21:36



CH46

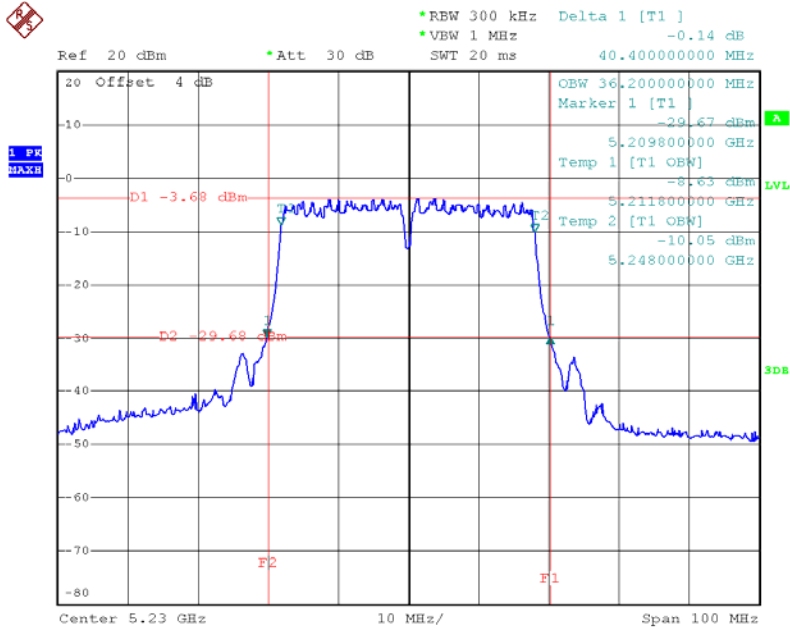

Date: 2.JUL.2013 16:23:16



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|------------------------|-----------------------|--|--------|
| Test Item | Frequency Range (MHz) | Limit | Result |
| Conducted Output Power | 5150 - 5250 | not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, | PASS |

Note: where “B” is the 26 dB emissions bandwidth in MHz.

6.1.1 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Next Calibration |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1 | Spectrum Analyzer | R&S | FSP_40 | 100129 | Nov.26.2012 | Nov.26.2013 |

Remark: “N/A” denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

6.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW | = 1 MHz. |
| VBW | ≥ 3 MHz. |
| Detector | RMS |
| Trace | Max Hold |
| Sweep Time | auto |


- b. Test was performed in accordance with method of KDB 789033 D01.



6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP



6.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.6 TEST RESULTS

| | | | |
|----------------|-----------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX A Mode/CH36, CH40, CH48 | | |

| Test Channel | Frequency (MHz) | Conducted Output Power (dBm) | LIMIT (dBm) | LIMIT (W) |
|--------------|-----------------|------------------------------|-------------|-----------|
| CH36 | 5180 | 10.77 | 17.00 | 0.0501 |
| CH40 | 5200 | 10.62 | 17.00 | 0.0501 |
| CH48 | 5240 | 10.80 | 17.00 | 0.0501 |

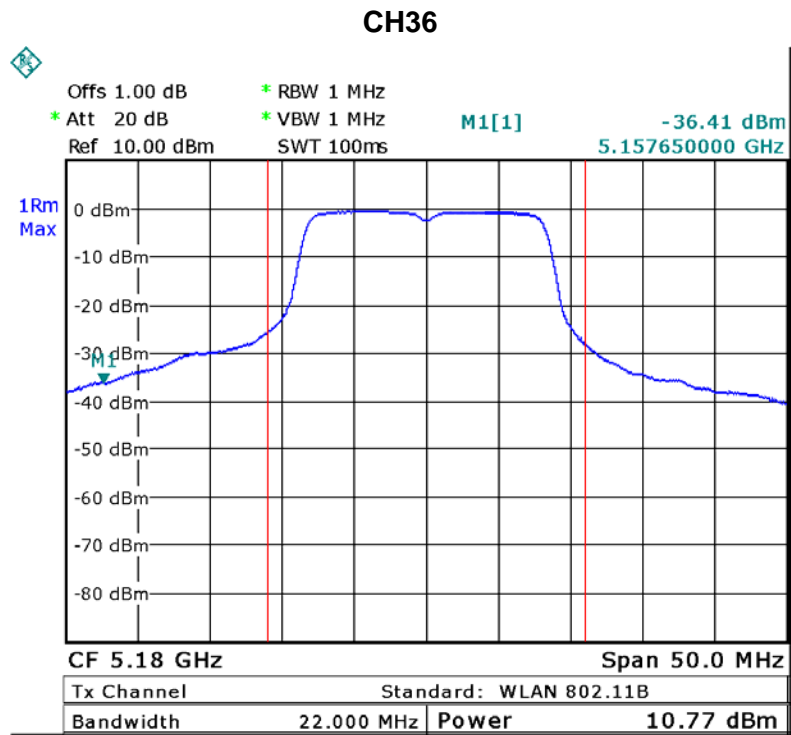


Date: 8.JUL.2013 17:05:17



| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/CH36, CH40, CH48-ANT 1 | | |

| Test Channel | Frequency (MHz) | Conducted Output Power (dBm) | LIMIT (dBm) | LIMIT (W) |
|--------------|-----------------|------------------------------|-------------|-----------|
| CH36 | 5180 | 8.77 | 17.00 | 0.0501 |
| CH40 | 5200 | 8.86 | 17.00 | 0.0501 |
| CH48 | 5240 | 8.78 | 17.00 | 0.0501 |


CH36

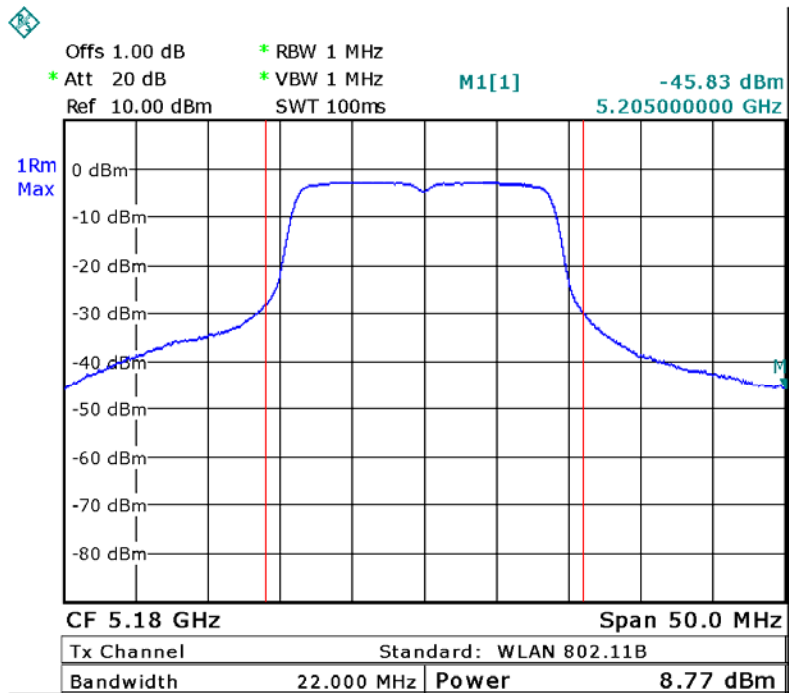

Date: 8.JUL.2013 17:11:33




CH40

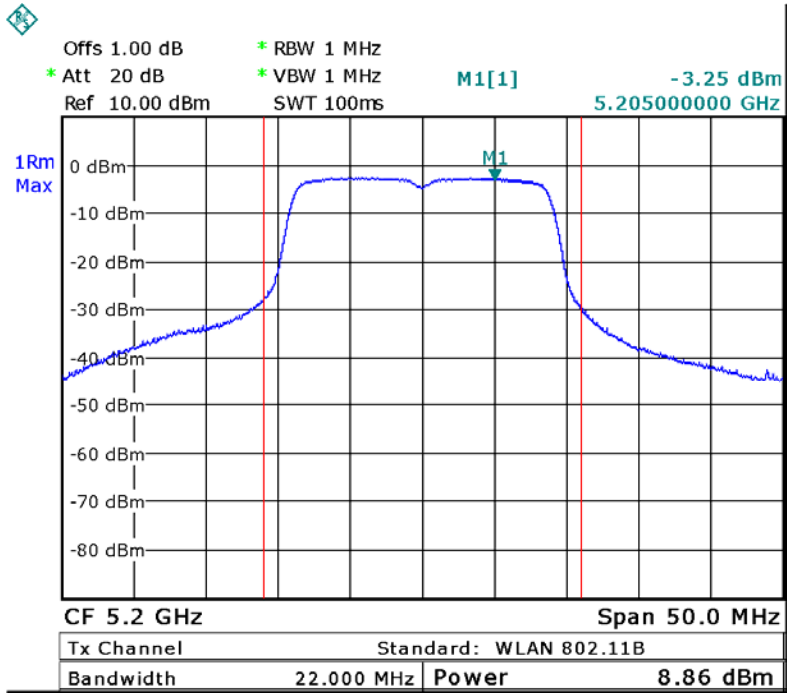

Date: 8.JUL.2013 17:12:59

CH48

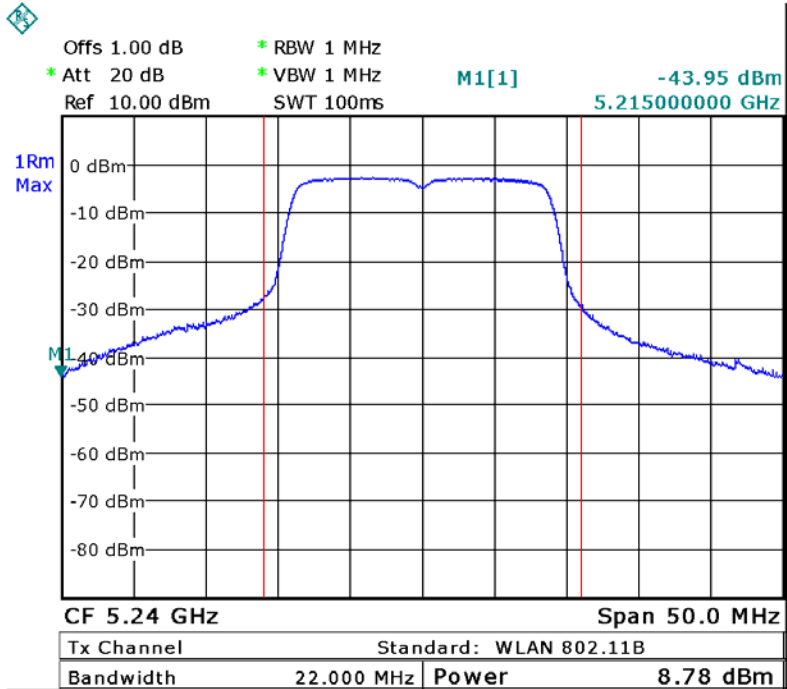


Date: 8.JUL.2013 17:13:21



| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/CH36, CH40, CH48-ANT 2 | | |

| Test Channel | Frequency (MHz) | Conducted Output Power (dBm) | LIMIT (dBm) | LIMIT (W) |
|--------------|-----------------|------------------------------|-------------|-----------|
| CH36 | 5180 | 8.93 | 17.00 | 0.0501 |
| CH40 | 5200 | 8.74 | 17.00 | 0.0501 |
| CH48 | 5240 | 8.95 | 17.00 | 0.0501 |


CH36

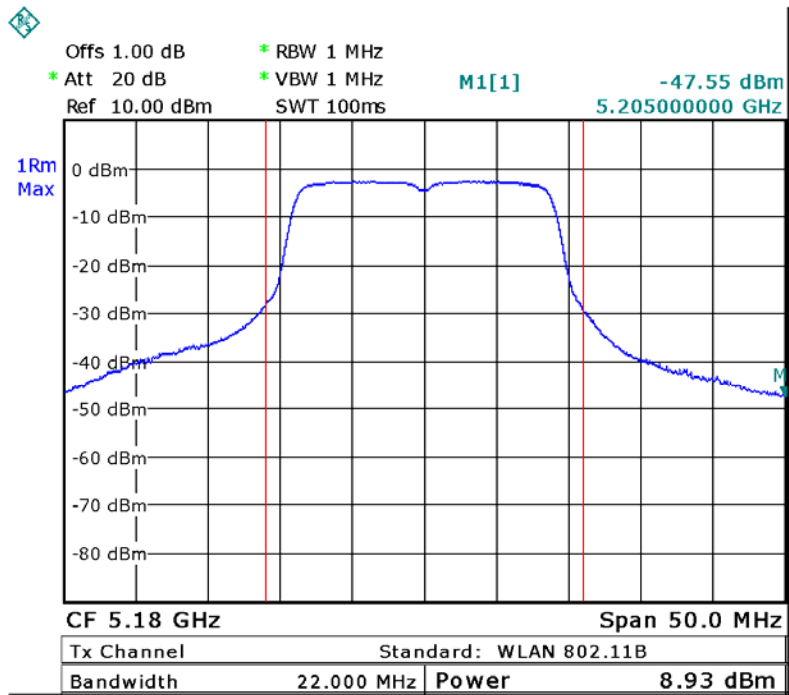

Date: 8.JUL.2013 17:19:35




CH40

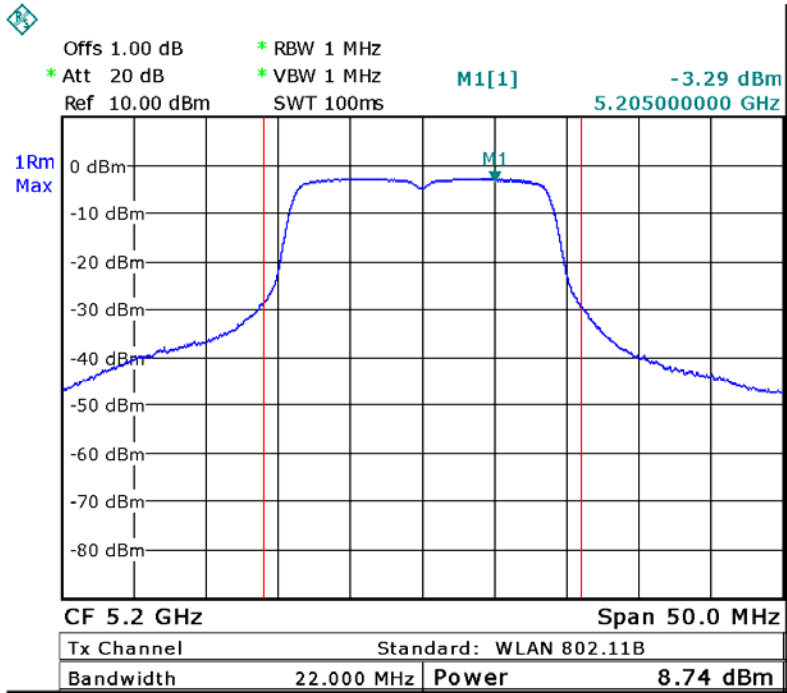

Date: 8.JUL.2013 17:20:13

CH48

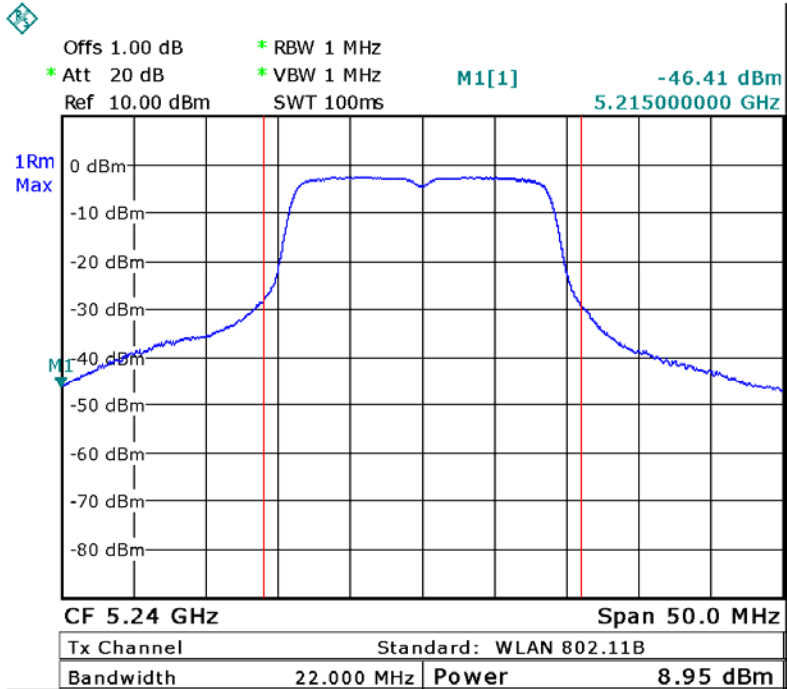

Date: 8.JUL.2013 17:20:39



| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/CH36, CH40, CH48-ANT 1+ANT 2 | | |


| Test Channel | Frequency (MHz) | Conducted Output Power (dBm) | LIMIT (dBm) | LIMIT (W) |
|--------------|-----------------|------------------------------|-------------|-----------|
| CH36 | 5180 | 11.86 | 17.00 | 0.0501 |
| CH40 | 5200 | 11.81 | 17.00 | 0.0501 |
| CH48 | 5240 | 11.88 | 17.00 | 0.0501 |



| | | | |
|----------------|--------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/CH38, CH46 -ANT 1 | | |

| Test Channel | Frequency (MHz) | Conducted Output Power (dBm) | LIMIT (dBm) | LIMIT (W) |
|--------------|-----------------|------------------------------|-------------|-----------|
| CH38 | 5190 | 7.08 | 17.00 | 0.0501 |
| CH46 | 5230 | 7.20 | 17.00 | 0.0501 |


CH38

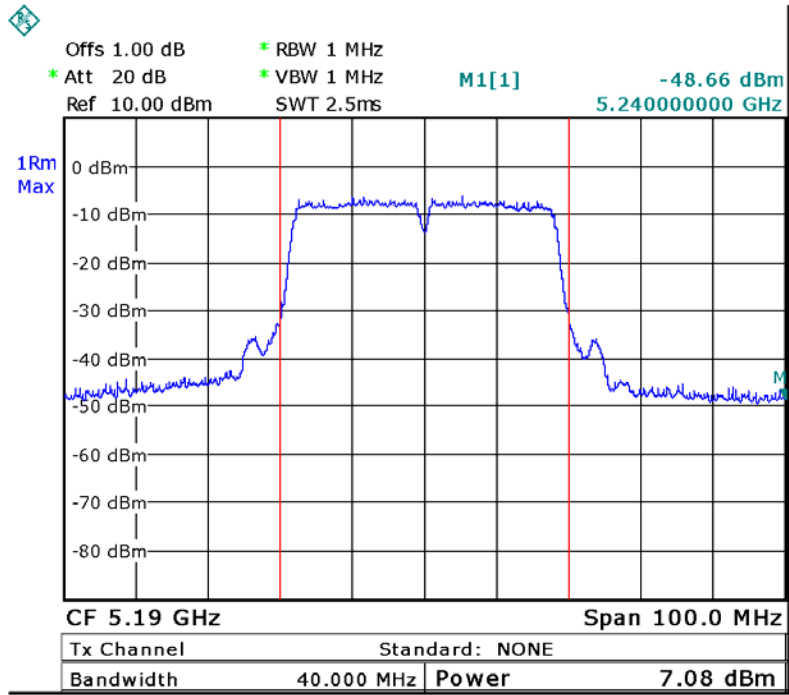

Date: 8.JUL.2013 17:37:33



CH46

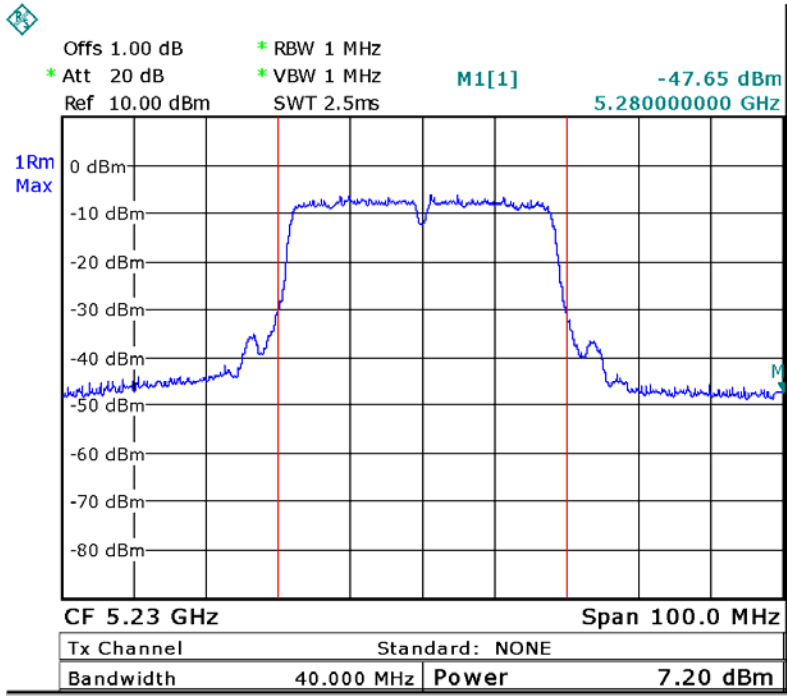


Date: 8.JUL.2013 17:37:03



| | | | |
|----------------|--------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/CH38, CH46 -ANT 2 | | |

| Test Channel | Frequency (MHz) | Conducted Output Power (dBm) | LIMIT (dBm) | LIMIT (W) |
|--------------|-----------------|------------------------------|-------------|-----------|
| CH38 | 5190 | 7.31 | 17.00 | 0.0501 |
| CH46 | 5230 | 7.32 | 17.00 | 0.0501 |


CH38

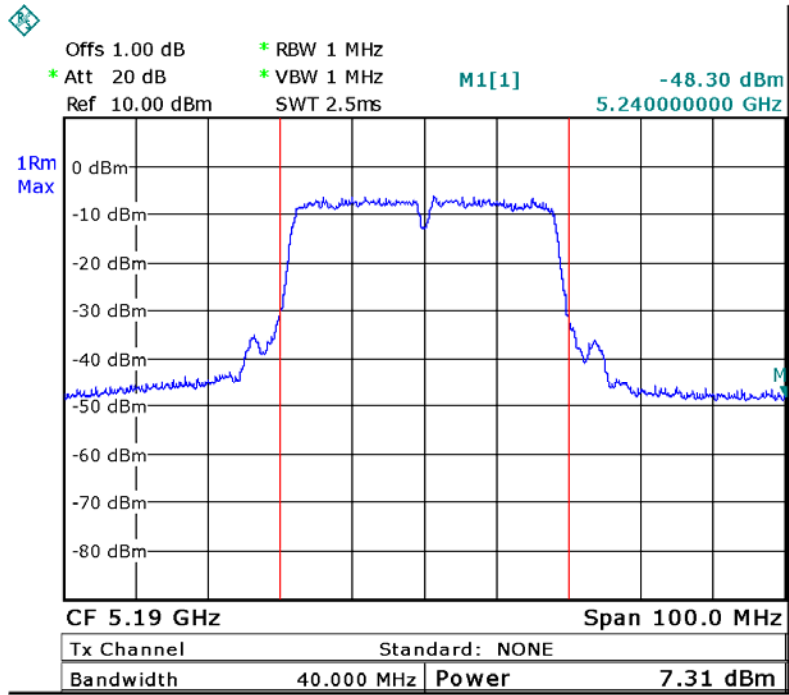

Date: 8.JUL.2013 17:28:02



CH46

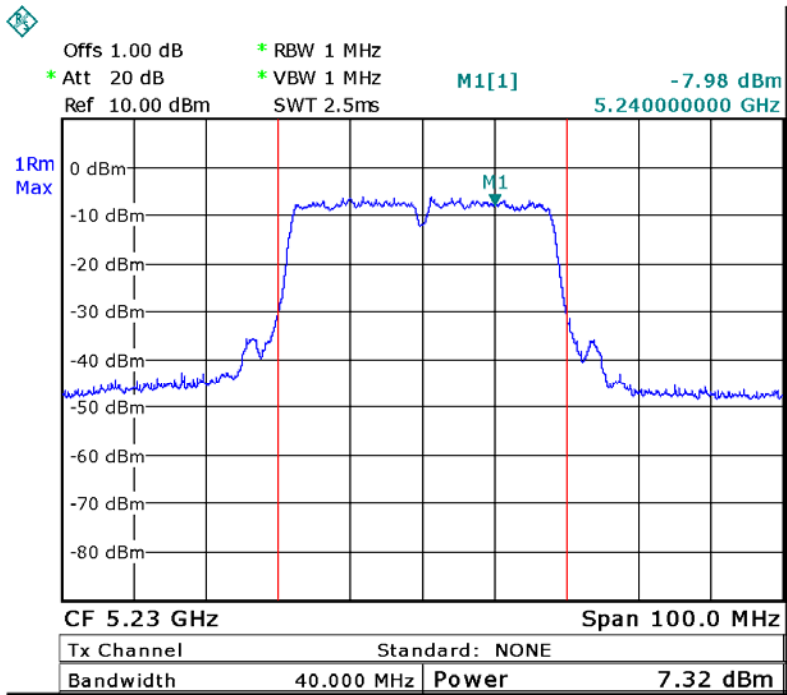

Date: 8.JUL.2013 17:28:36



Neutron Engineering Inc.

| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/CH38, CH46-ANT 1+ANT 2 | | |

| Test Channel | Frequency (MHz) | Conducted Output Power (dBm) | LIMIT (dBm) | LIMIT (W) |
|--------------|-----------------|------------------------------|-------------|-----------|
| CH38 | 5190 | 10.21 | 17.00 | 0.0501 |
| CH46 | 5230 | 10.27 | 17.00 | 0.0501 |



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|-------------------------------------|--------------|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Antenna conducted Spurious Emission | -27 dBm/1MHz | 5150 – 5250 | PASS |

7.1.1 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Next Calibration |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1 | Spectrum Analyzer | R&S | FSP_40 | 100129 | Nov.26.2012 | Nov.26.2013 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of Equipment List is One Year.

7.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,


b.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| RB | 1000 kHz |
| VB | 1000 kHz |
| Trace | Max Hold |
| Sweep Time | Auto |

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.




7.1.6 TEST RESULTS

| | | | |
|----------------|------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX A Mode/ CH36, CH40, CH48 | | |

| | | | |
|--|------------|--|------------|
| Channel of Worst Data: CH36 | | | |
| The max. radio frequency power in any 1000kHz bandwidth outside the frequency band | | The max. radio frequency power in any 1000kHz bandwidth within the frequency band. | |
| FREQUENCY(MHz) | POWER(dBm) | FREQUENCY(MHz) | POWER(dBm) |
| 5150.00 | -32.08 | 5350.00 | -46.75 |
| Limit: -27 dBm/1MHz | | Result:PASS | |
| Measurement method: S.A Read value+Ant gain+cable loss | | | |




TX mode CH36

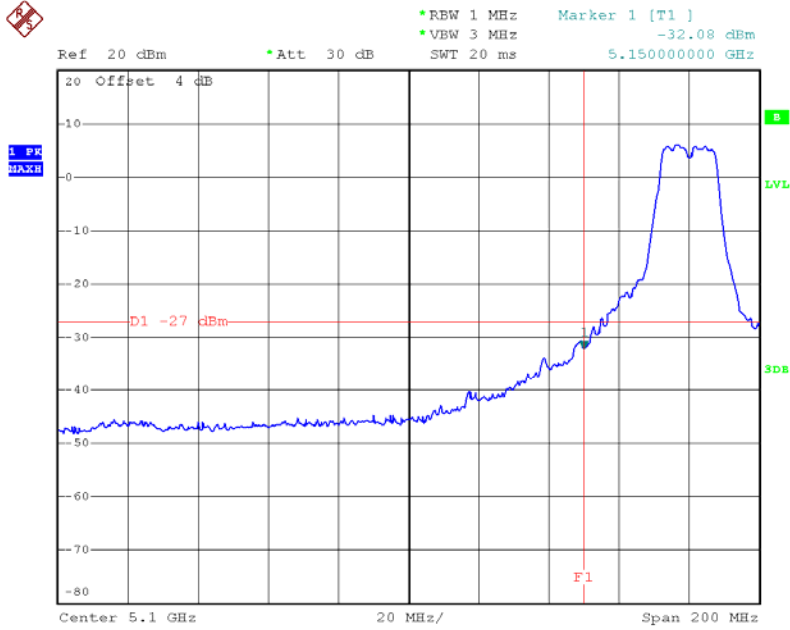

Date: 2.JUL.2013 14:12:21

TX mode CH48

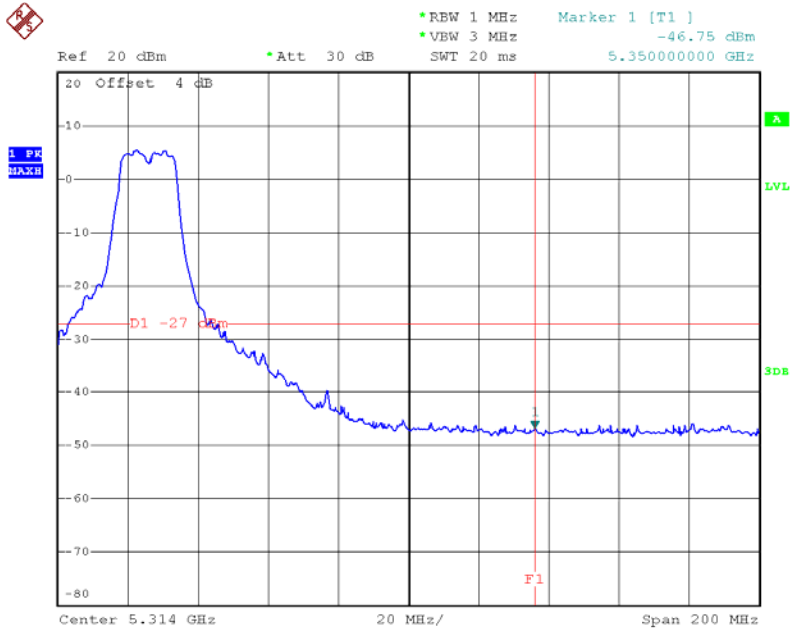

Date: 2.JUL.2013 14:29:39




| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/ CH36, CH40 , CH48-ANT 1 | | |

| | | | |
|--|------------|--|------------|
| Channel of Worst Data: CH36 | | | |
| The max. radio frequency power in any 1000kHz bandwidth outside the frequency band | | The max. radio frequency power in any 1000kHz bandwidth within the frequency band. | |
| FREQUENCY(MHz) | POWER(dBm) | FREQUENCY(MHz) | POWER(dBm) |
| 5150.00 | -38.01 | 5350.00 | -45.68 |
| Limit: -27 dBm/1MHz | | Result:PASS | |
| Measurement method: S.A Read value+Ant gain+cable loss | | | |




TX mode CH36

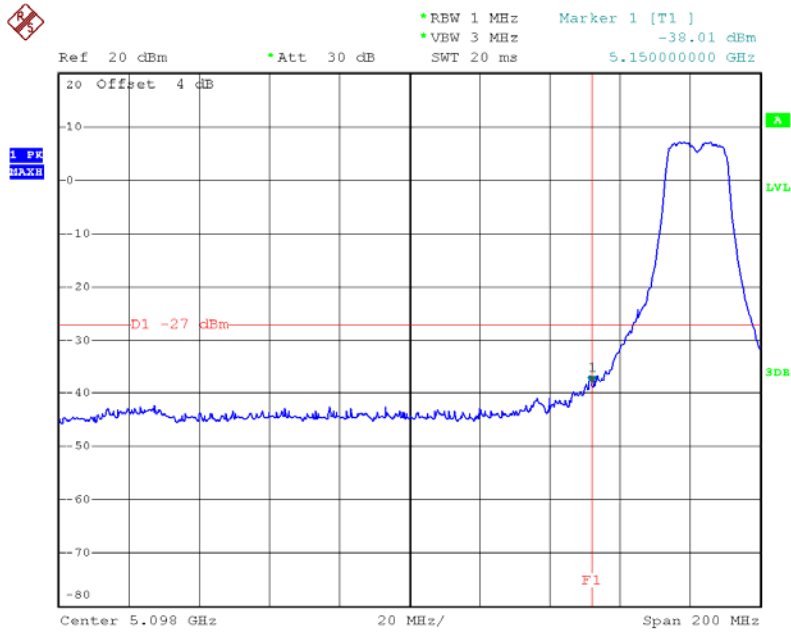

Date: 2.JUL.2013 15:38:41

TX mode CH48

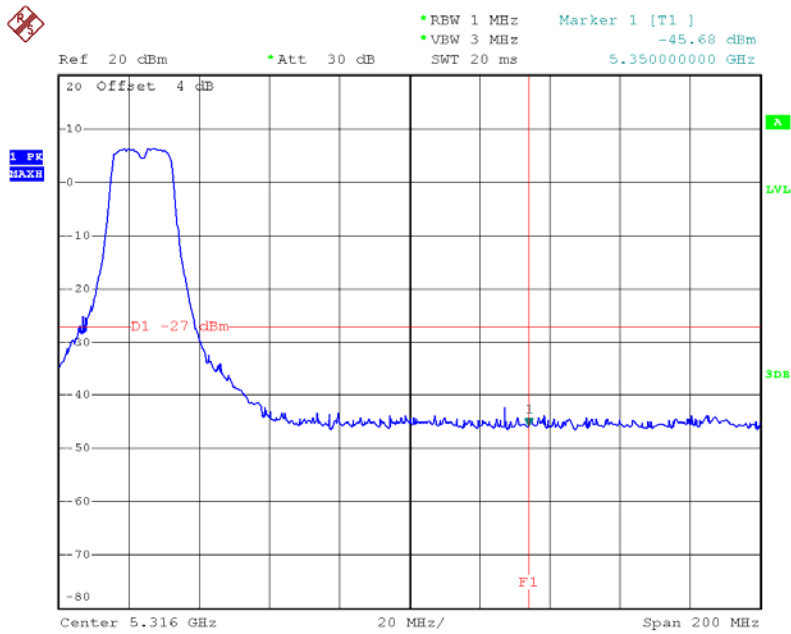

Date: 2.JUL.2013 15:46:43




| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/ CH36, CH40 , CH48-ANT 2 | | |

| | | | |
|--|------------|--|------------|
| Channel of Worst Data: CH36 | | | |
| The max. radio frequency power in any 1000kHz bandwidth outside the frequency band | | The max. radio frequency power in any 1000kHz bandwidth within the frequency band. | |
| FREQUENCY(MHz) | POWER(dBm) | FREQUENCY(MHz) | POWER(dBm) |
| 5150.00 | -35.02 | 5350.00 | -44.59 |
| Limit: -27 dBm/1MHz | | Result:PASS | |
| Measurement method: S.A Read value+Ant gain+cable loss | | | |




TX mode CH36

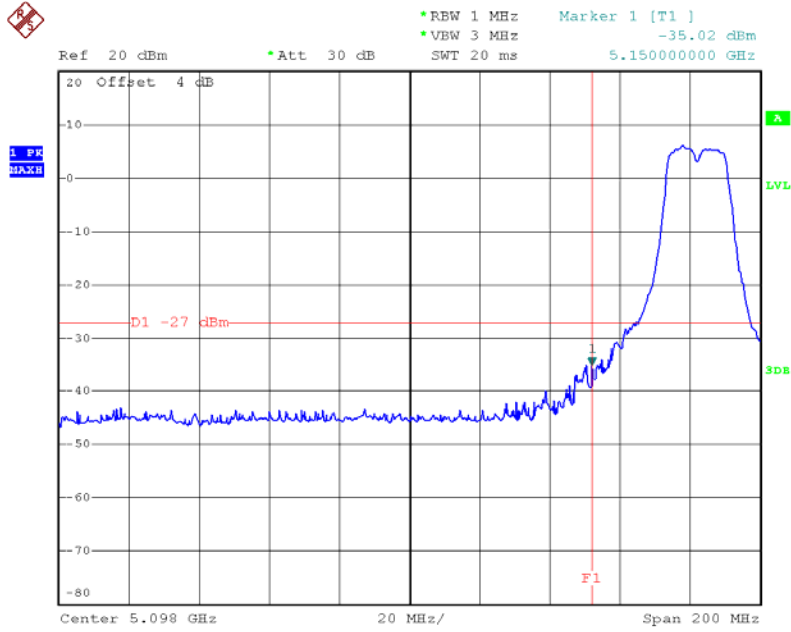

Date: 2.JUL.2013 15:39:17

TX mode CH48

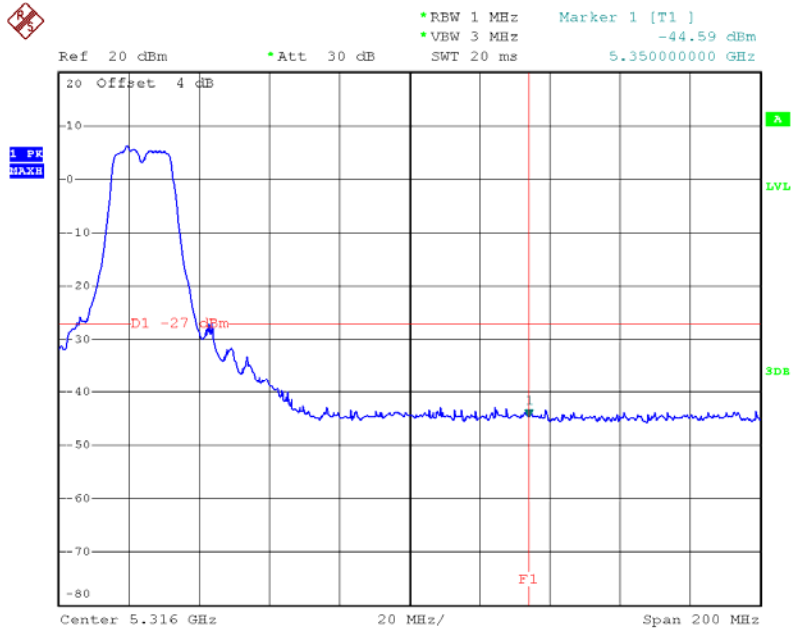

Date: 2.JUL.2013 15:46:17




| | | | |
|----------------|--------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/ CH38, CH46-ANT 1 | | |

| | | | |
|--|------------|--|------------|
| Channel of Worst Data: CH38 | | | |
| The max. radio frequency power in any 1000kHz bandwidth outside the frequency band | | The max. radio frequency power in any 1000kHz bandwidth within the frequency band. | |
| FREQUENCY(MHz) | POWER(dBm) | FREQUENCY(MHz) | POWER(dBm) |
| 5146.00 | -32.43 | 5350.00 | -44.54 |
| Limit: -27 dBm/1MHz | | Result:PASS | |
| Measurement method: S.A Read value+Ant gain+cable loss | | | |




TX mode CH38

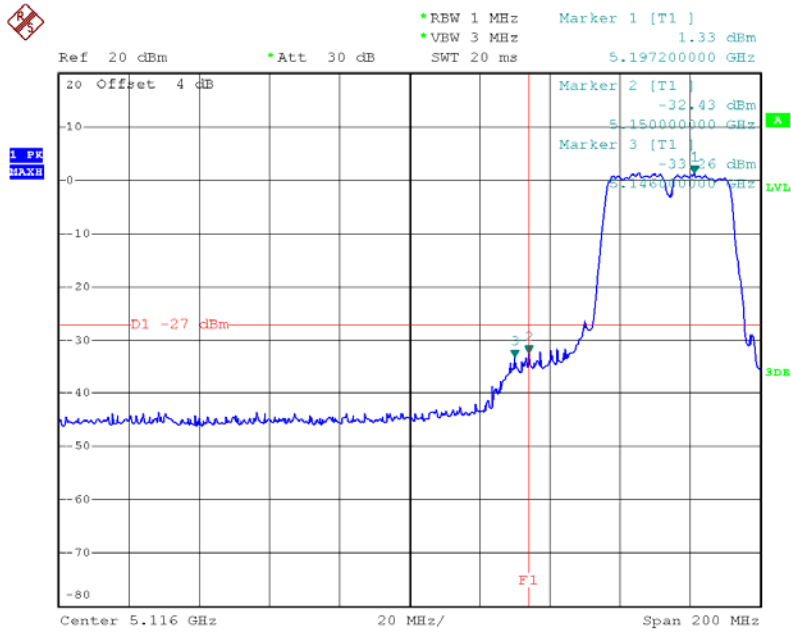

Date: 2.JUL.2013 16:18:18

TX mode CH46

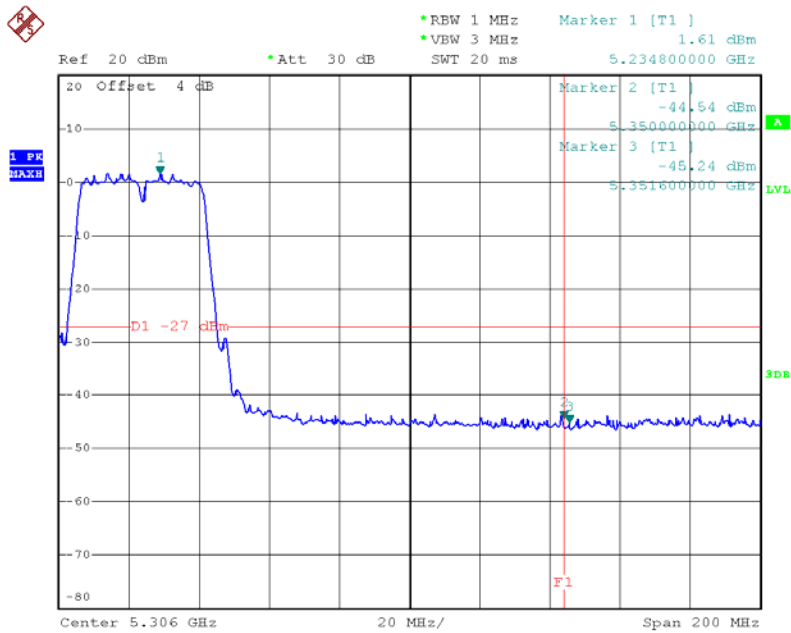

Date: 2.JUL.2013 16:25:36




| | | | |
|----------------|--------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/ CH38, CH46-ANT 2 | | |

| | | | |
|--|------------|--|------------|
| Channel of Worst Data: CH38 | | | |
| The max. radio frequency power in any 1000kHz bandwidth outside the frequency band | | The max. radio frequency power in any 1000kHz bandwidth within the frequency band. | |
| FREQUENCY(MHz) | POWER(dBm) | FREQUENCY(MHz) | POWER(dBm) |
| 5146.00 | -35.64 | 5351.60 | -43.24 |
| Limit: -27 dBm/1MHz | | Result:PASS | |
| Measurement method: S.A Read value+Ant gain+cable loss | | | |




TX mode CH38

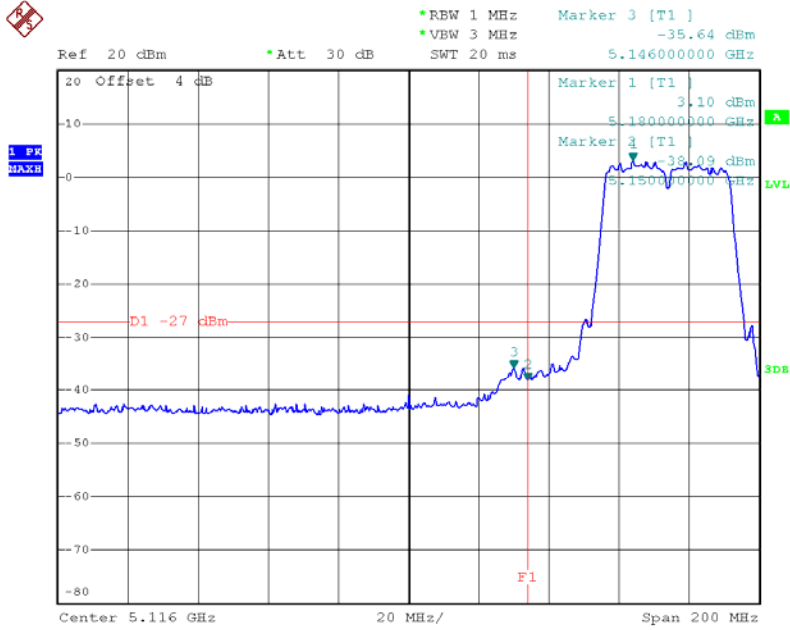

Date: 2.JUL.2013 16:17:57

TX mode CH46

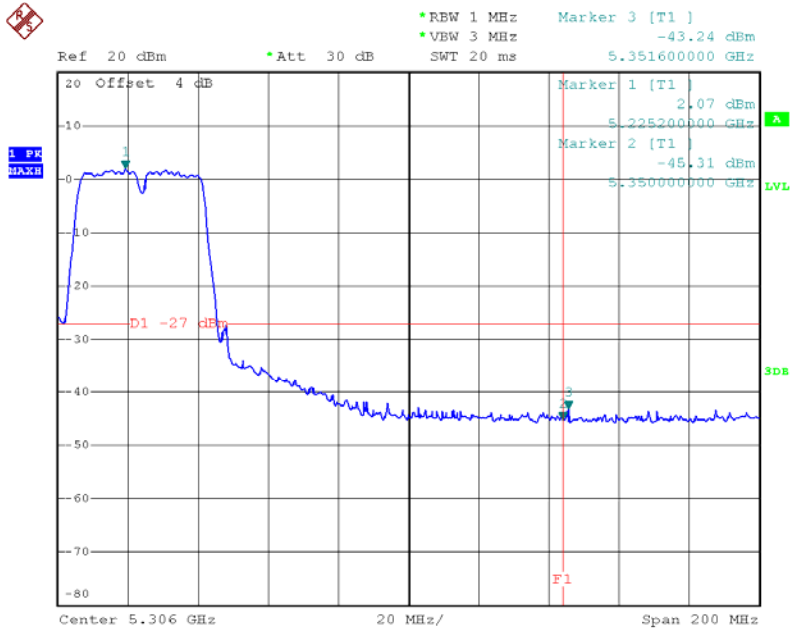

Date: 2.JUL.2013 16:25:07



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|------------------------|-------|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Power Spectral Density | 4 dBm | 5150 - 5250 | PASS |

8.1.1 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Next Calibration |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1 | Spectrum Analyzer | R&S | FSP_40 | 100129 | Nov.26.2012 | Nov.26.2013 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

8.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB | = 1 MHz. |
| VB | ≥ 3 MHz. |
| Detector | RMS |
| Trace | Max Hold |
| Sweep Time | Auto |

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP



8.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.1.6 TEST RESULTS

| | | | |
|----------------|-----------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX A Mode/CH36, CH40, CH48 | | |


| Test Channel | Frequency (MHz) | Power Density (dBm) | LIMIT (dBm) |
|--------------|-----------------|---------------------|-------------|
| CH36 | 5180 | -2.16 | 4.00 |
| CH40 | 5200 | -2.91 | 4.00 |
| CH48 | 5240 | -3.20 | 4.00 |

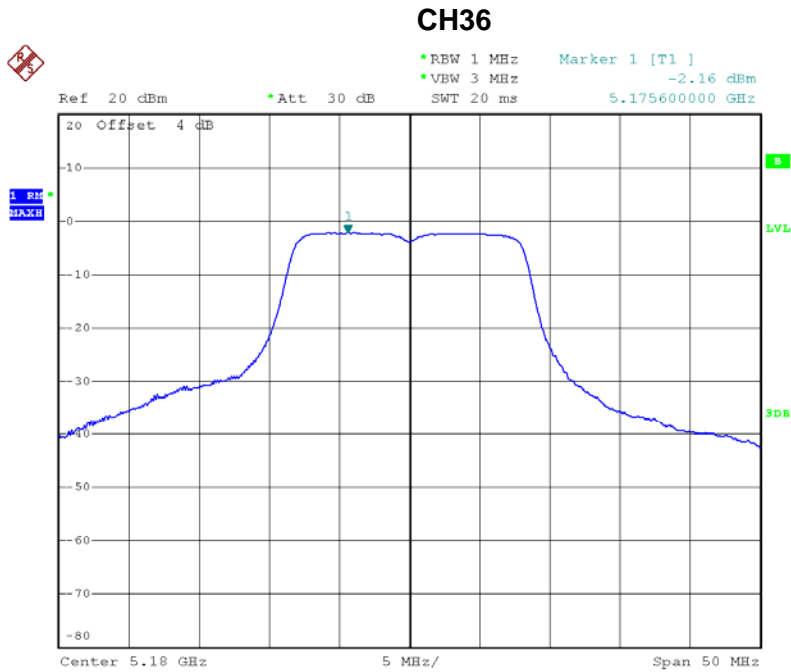

Date: 2.JUL.2013 14:06:40




CH40

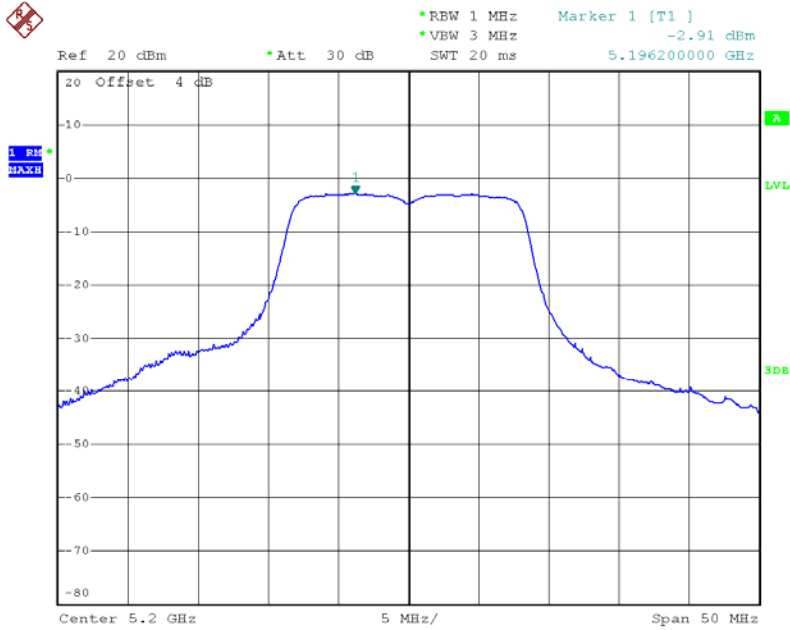

Date: 2.JUL.2013 14:25:47

CH48

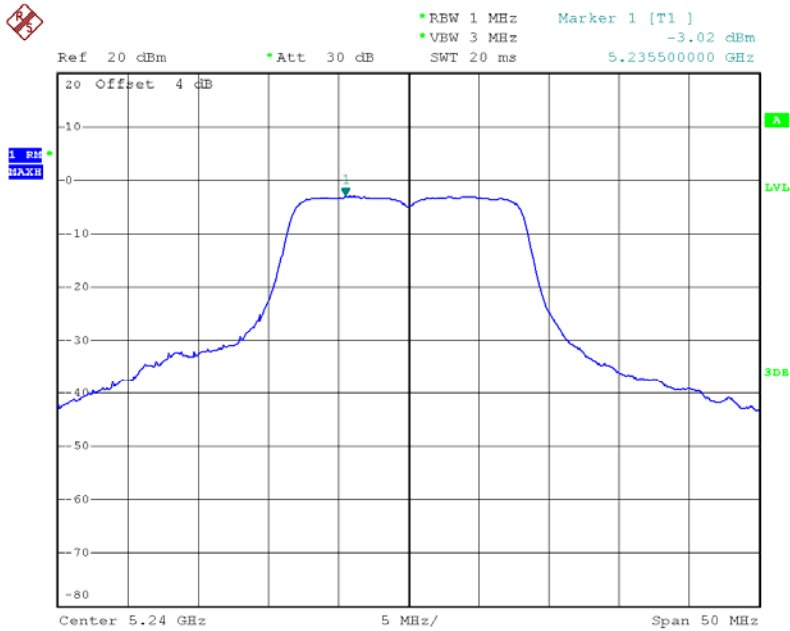


Date: 2.JUL.2013 14:31:17



| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/CH36, CH40, CH48-ANT 1 | | |


| Test Channel | Frequency (MHz) | Power Density (dBm) | LIMIT (dBm) |
|--------------|-----------------|---------------------|-------------|
| CH36 | 5180 | -5.28 | 4.00 |
| CH40 | 5200 | -2.59 | 4.00 |
| CH48 | 5240 | -1.83 | 4.00 |

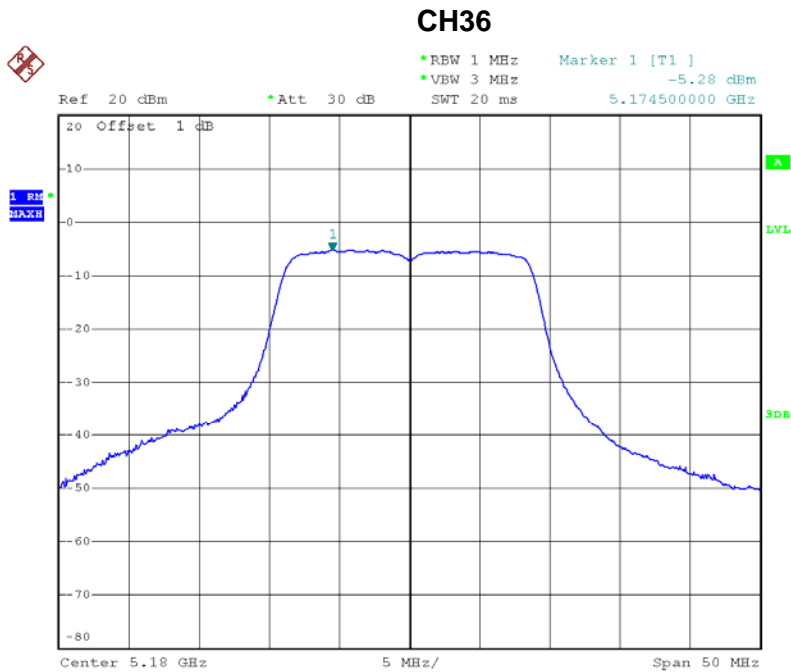

Date: 2.JUL.2013 15:37:03




CH40

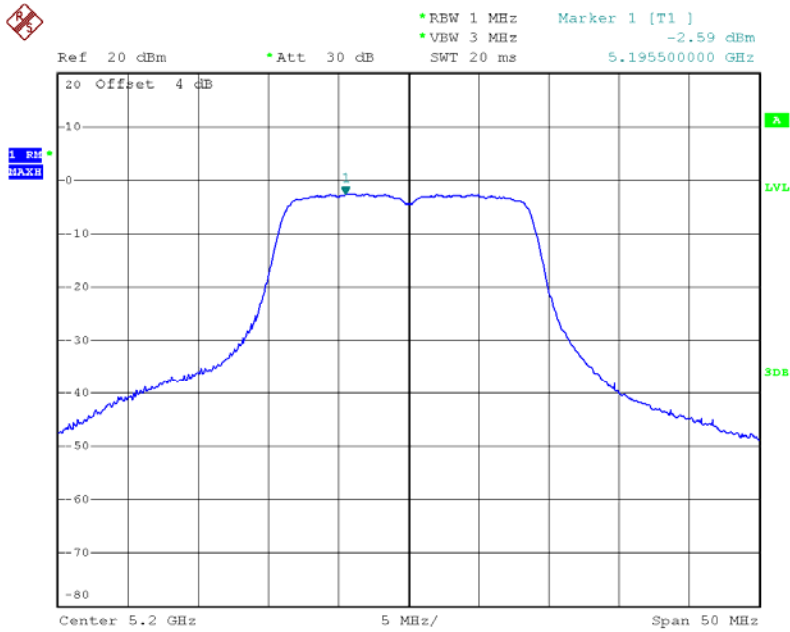

Date: 2.JUL.2013 15:41:44

CH48

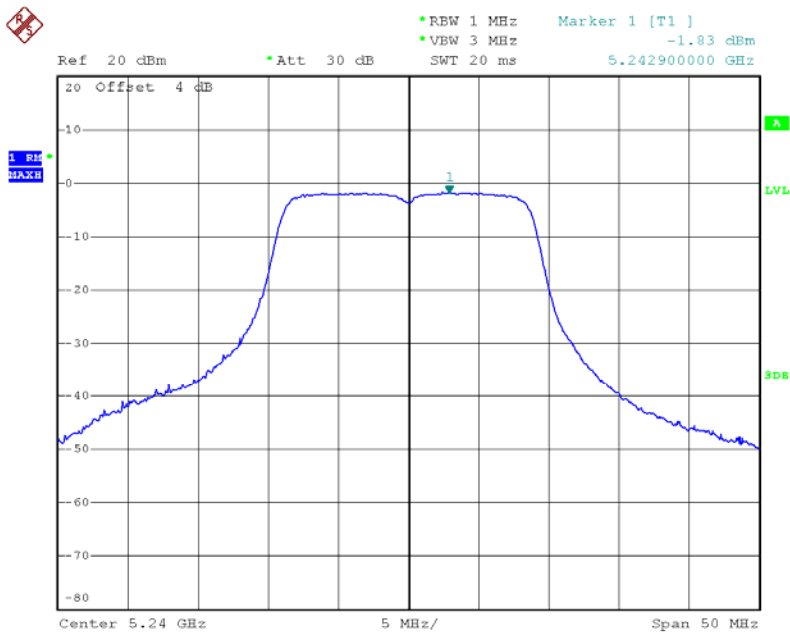


Date: 2.JUL.2013 15:43:26



| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/CH36, CH40, CH48-ANT 2 | | |


| Test Channel | Frequency (MHz) | Power Density (dBm) | LIMIT (dBm) |
|--------------|-----------------|---------------------|-------------|
| CH36 | 5180 | -4.29 | 4.00 |
| CH40 | 5200 | -1.72 | 4.00 |
| CH48 | 5240 | -2.68 | 4.00 |

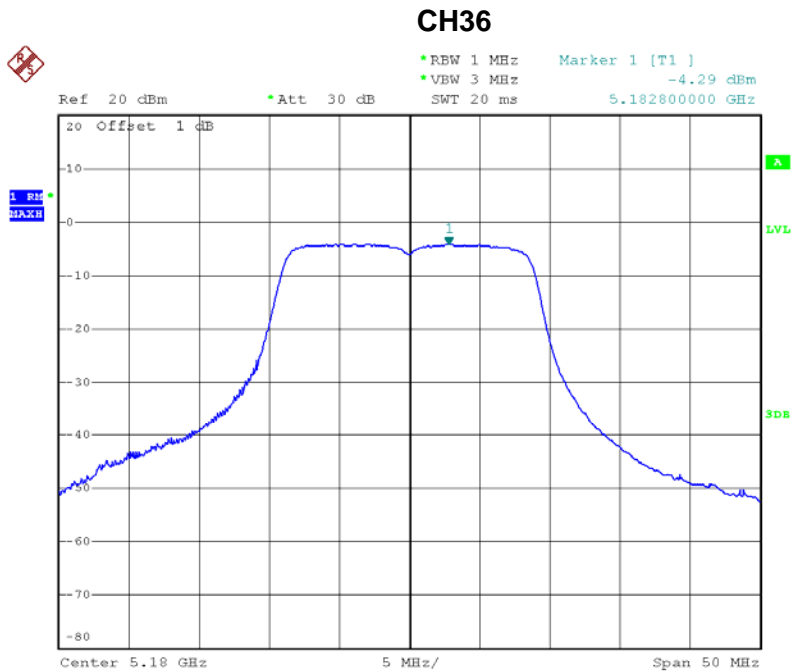

Date: 2.JUL.2013 15:37:32




CH40

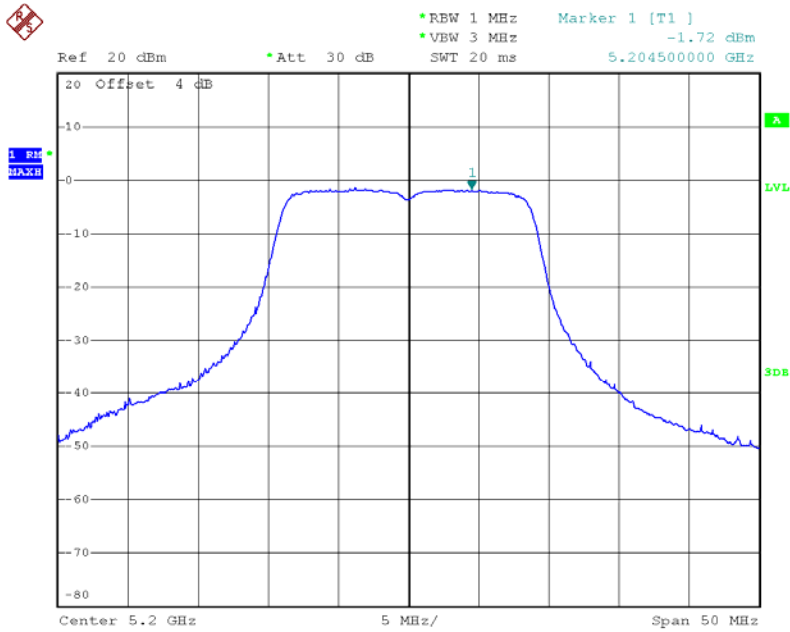

Date: 2.JUL.2013 15:42:04

CH48

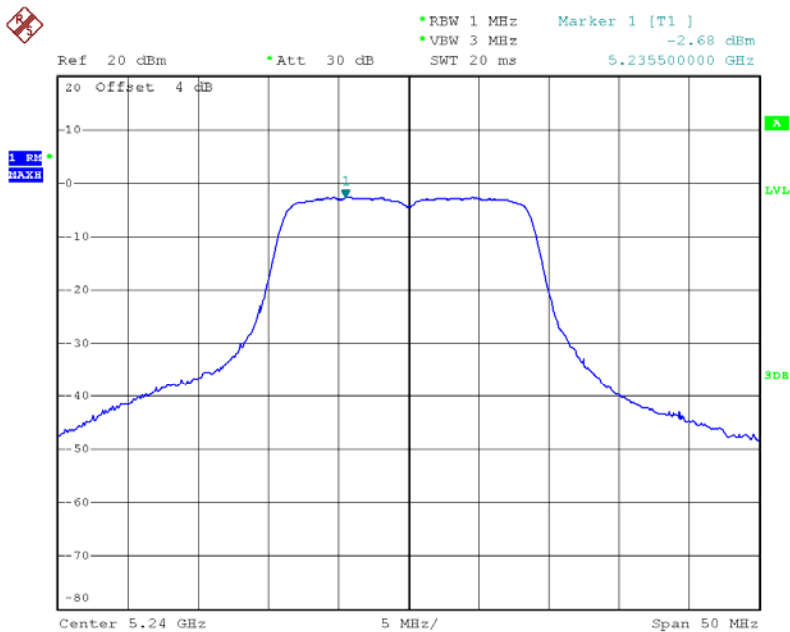

Date: 2.JUL.2013 15:43:46




| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/CH36, CH40, CH48-ANT 1+ANT 2 | | |

| Test Channel | Frequency (MHz) | Power Density (dBm) | LIMIT (dBm) |
|--------------|-----------------|---------------------|-------------|
| CH36 | 5180 | -1.75 | 4.00 |
| CH40 | 5200 | 0.88 | 4.00 |
| CH48 | 5240 | 0.78 | 4.00 |



| | | | |
|----------------|--------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/CH38, CH46 -ANT 1 | | |


| Test Channel | Frequency (MHz) | Power Density (dBm) | LIMIT (dBm) |
|--------------|-----------------|---------------------|-------------|
| CH38 | 5190 | -5.92 | 4.00 |
| CH46 | 5230 | -6.75 | 4.00 |

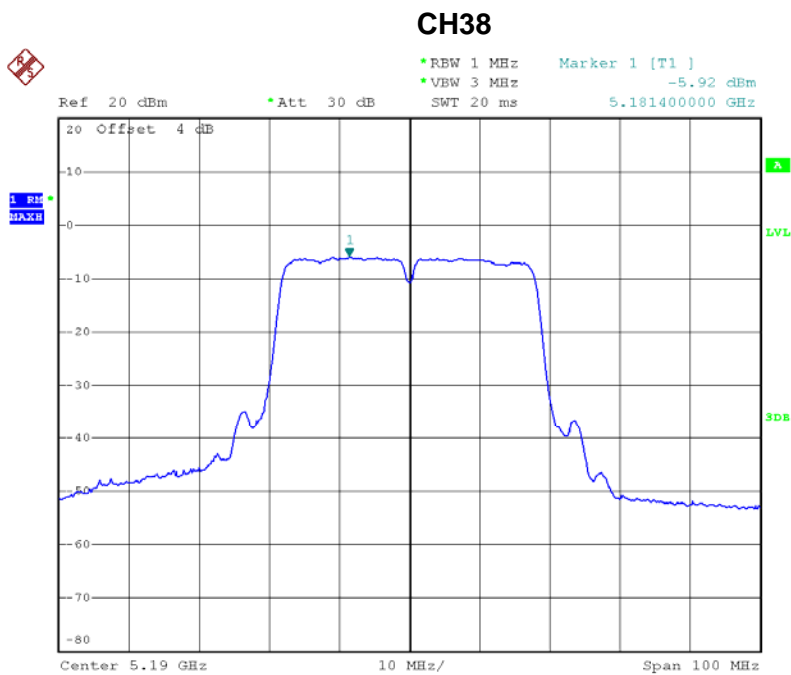

Date: 2.JUL.2013 16:20:07



CH46

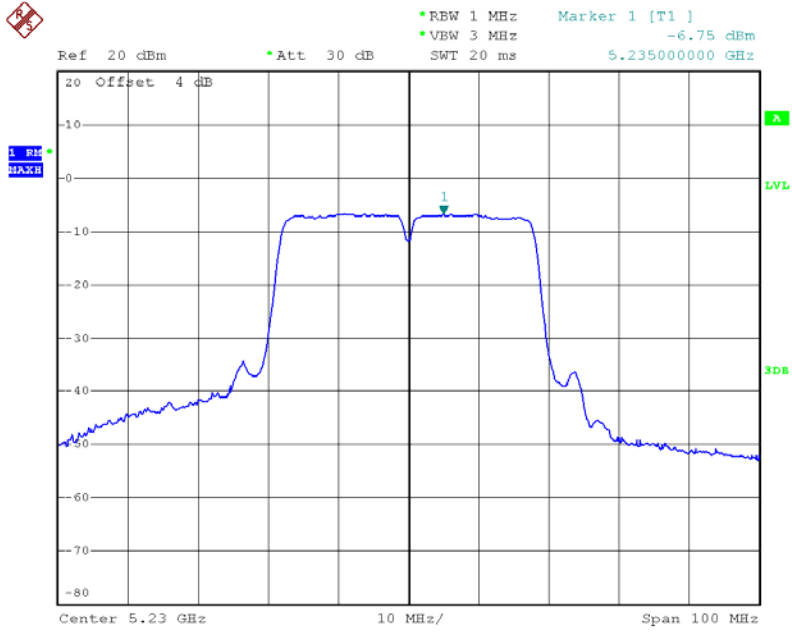


Date: 2.JUL.2013 16:24:14



| | | | |
|----------------|--------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/CH38, CH46 -ANT 2 | | |


| Test Channel | Frequency (MHz) | Power Density (dBm) | LIMIT (dBm) |
|--------------|-----------------|---------------------|-------------|
| CH38 | 5190 | -6.19 | 4.00 |
| CH46 | 5230 | -6.86 | 4.00 |

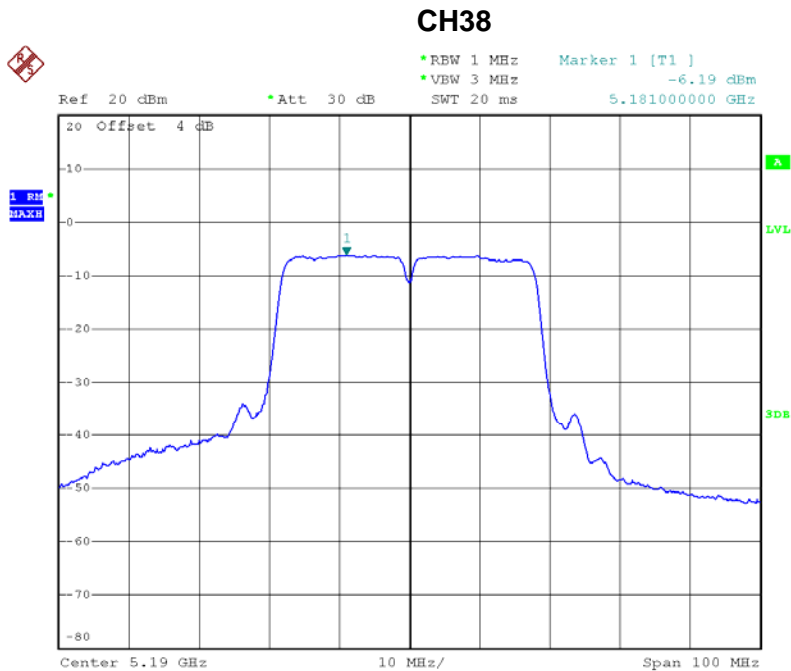

Date: 2.JUL.2013 16:19:50



CH46

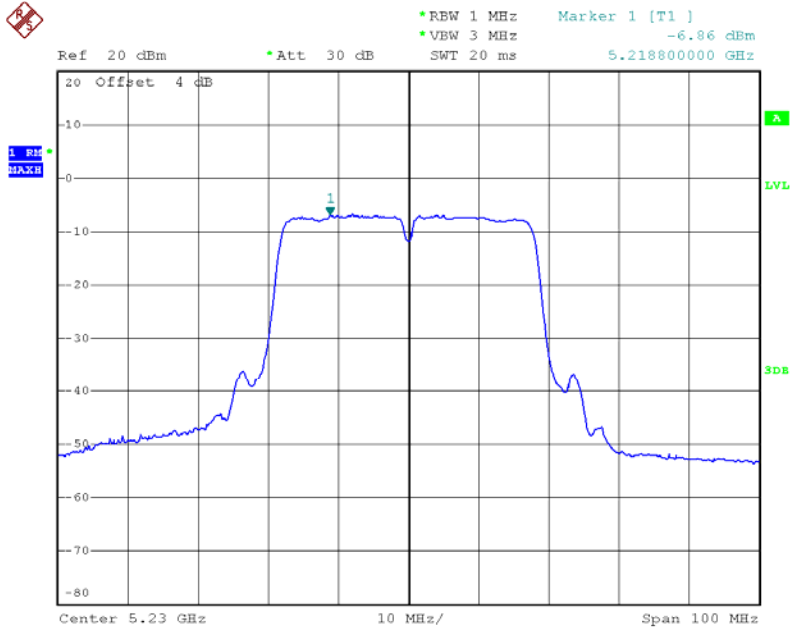

Date: 2.JUL.2013 16:23:52



Neutron Engineering Inc.

| | | | |
|----------------|---|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 ° C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/CH38, CH46 –ANT 1+ ANT 2 | | |

| Test Channel | Frequency (MHz) | Power Density (dBm) | LIMIT (dBm) |
|--------------|-----------------|---------------------|-------------|
| CH38 | 5190 | -3.04 | 4.00 |
| CH46 | 5230 | -3.79 | 4.00 |



9. PEAK EXCURSION MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E | | | |
|----------------------------|-------|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Peak Excursion Measurement | 13 dB | 5150 - 5250 | PASS |

9.1.1 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Next Calibration |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1 | Spectrum Analyzer | R&S | FSP_40 | 100129 | Nov.26.2012 | Nov.26.2013 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of Equipment List is One Year.

9.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB | 1000 kHz (Peak Trace) / 1000 kHz (Average Trace) |
| VB | 3000 kHz (Peak Trace) / 3000 kHz (Average Trace) |
| Detector | Peak (Peak Trace) / RMS (Average Trace) |
| Trace | Max Hold |
| Sweep Time | 60s |


- c. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and maxhold settings.
- d. Average Trace: set RBW = 1 MHz, VBW = 3 MHz with RMS detector and trace average across 100 traces in power averaging mode.

9.1.3 DEVIATION FROM STANDARD

No deviation.



9.1.4 TEST SETUP



9.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.1.6 TEST RESULTS

| | | | |
|----------------|-----------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX A Mode/CH36, CH40, CH48 | | |


| Test Channel | Frequency (MHz) | Peak Excursion (dB) | LIMIT (dB) |
|--------------|-----------------|---------------------|------------|
| CH36 | 5180 | 8.21 | 13 |
| CH40 | 5200 | 8.11 | 13 |
| CH48 | 5240 | 8.28 | 13 |

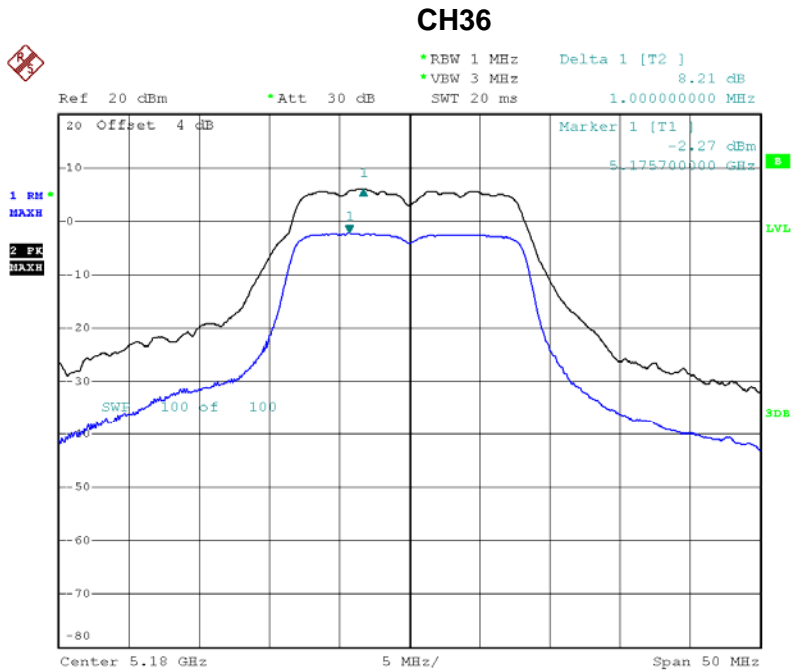

Date: 2.JUL.2013 14:18:59




CH40

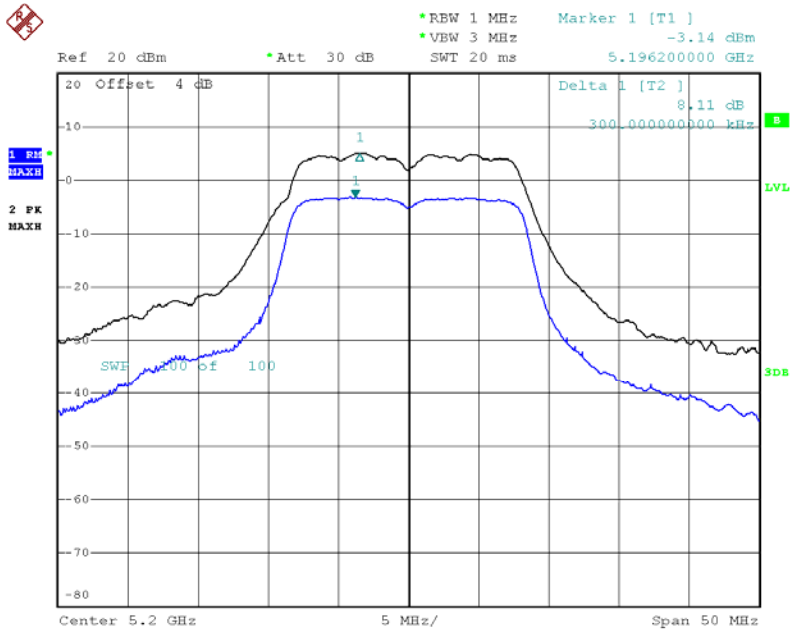

Date: 2.JUL.2013 14:22:14

CH48

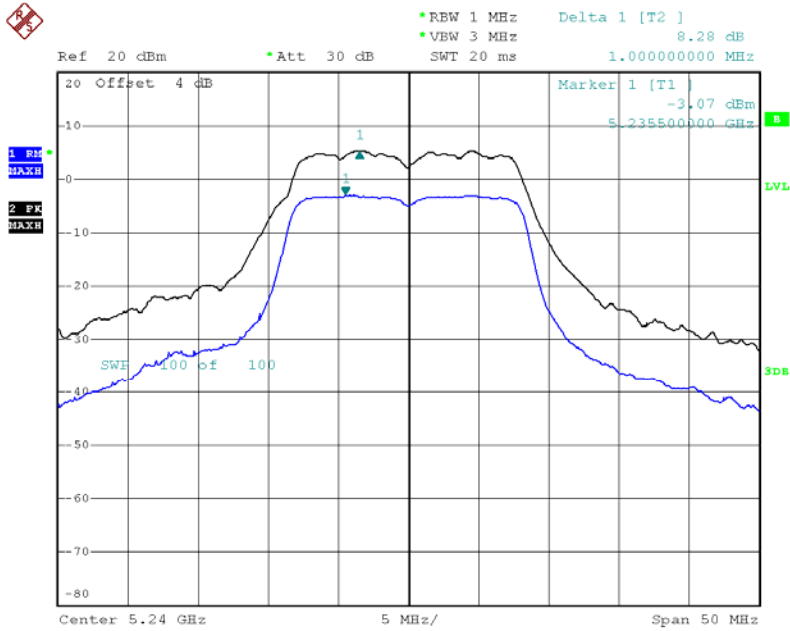


Date: 2.JUL.2013 14:31:47



| | | | |
|----------------|-------------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N20 Mode/CH36, CH40, CH48 | | |


| Test Channel | Frequency (MHz) | Peak Excursion (dB) | LIMIT (dB) |
|--------------|-----------------|---------------------|------------|
| CH36 | 5180 | 8.64 | 13 |
| CH40 | 5200 | 8.62 | 13 |
| CH48 | 5240 | 8.21 | 13 |

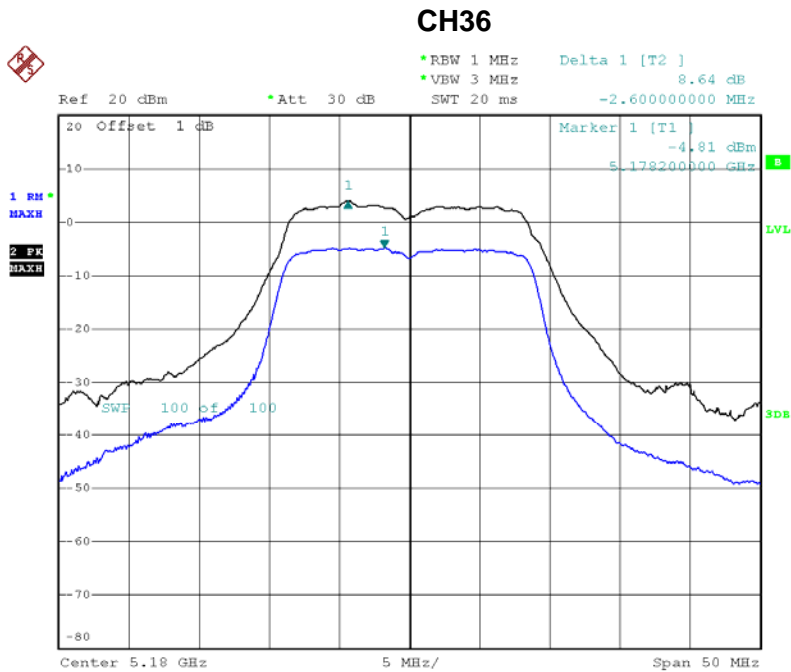

Date: 2.JUL.2013 15:33:26




CH40

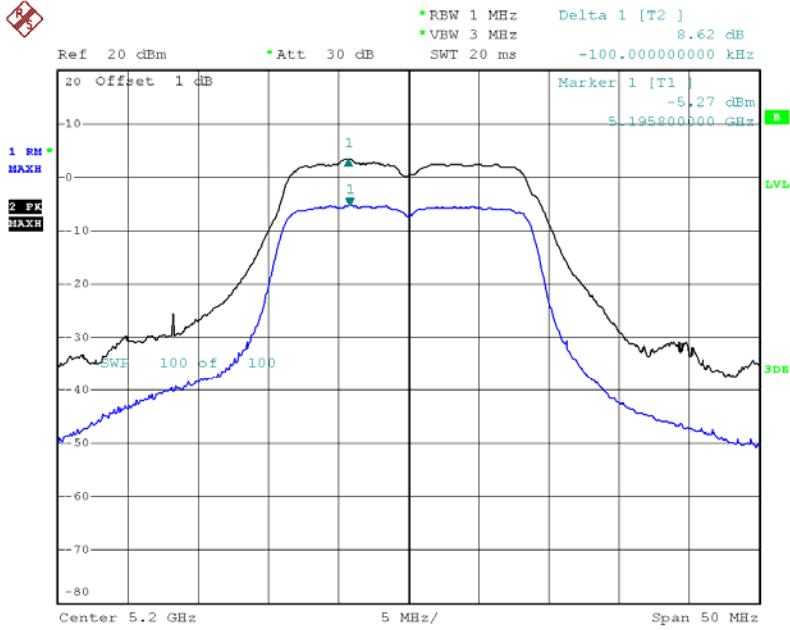

Date: 2.JUL.2013 15:40:24

CH48

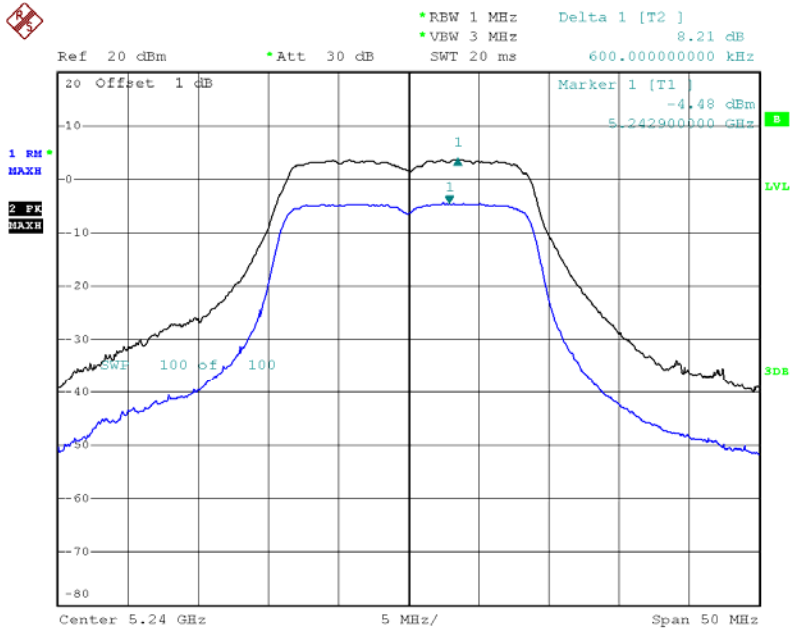


Date: 2.JUL.2013 15:43:16



| | | | |
|----------------|-------------------------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1/TX N40 Mode/CH38, CH46 | | |


| Test Channel | Frequency (MHz) | Peak Excursion (dB) | LIMIT (dB) |
|--------------|-----------------|---------------------|------------|
| CH38 | 5190 | 9.02 | 13 |
| CH46 | 5230 | 8.91 | 13 |

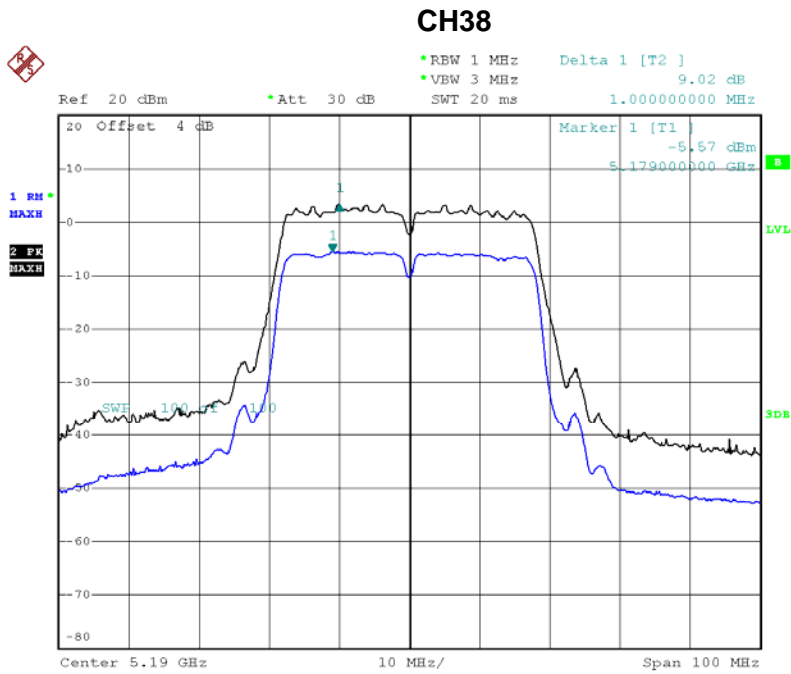

Date: 2.JUL.2013 16:15:58



CH46

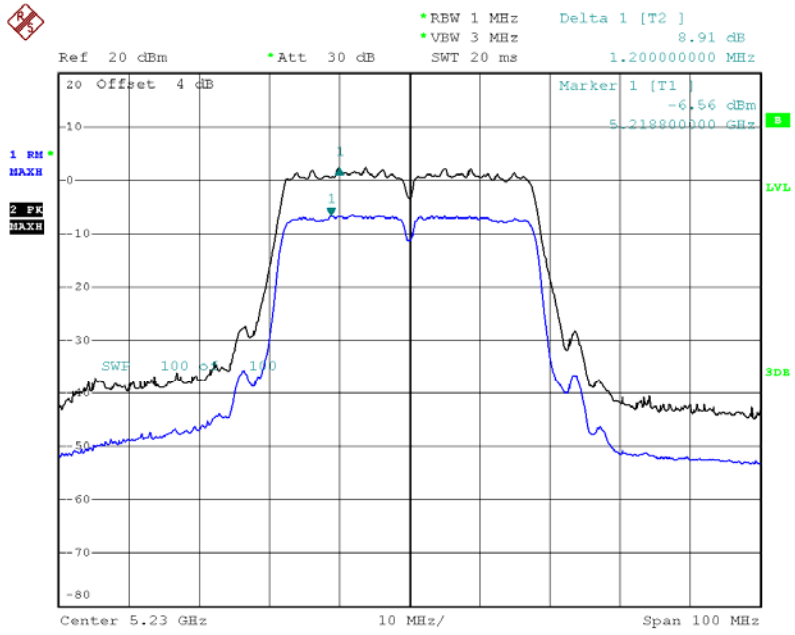

Date: 2.JUL.2013 16:22:33



10. FREQUENCY STABILITY MEASUREMENT

10.1 APPLIED PROCEDURES / LIMIT

| FCC Part15, Subpart E 15.407(g) | | | |
|---------------------------------|--------------------------------|-----------------------|--------|
| Test Item | Limit | Frequency Range (MHz) | Result |
| Frequency Stability | specified in the user's manual | 5150 – 5250 | PASS |

10.1.1 MEASUREMENT INSTRUMENTS LIST

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-----------------------|--------------|----------|------------|------------------|
| 1 | Spectrum Analyzer | R&S | FSP_40 | 100129 | Nov. 26.2013 |
| 2 | Precision Oven Tester | HOLINK | H-T-1F-D | BA03101701 | May.25.2014 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of Equipment List is One Year.

10.1.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| Span Frequency | Entire absence of modulation emissions bandwidth |
| RB | 10 kHz |
| VB | 10 kHz |
| Sweep Time | Auto |

c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.


d. user manual temperature is 0°C~35°C.

10.1.3 DEVIATION FROM STANDARD

No deviation.



10.1.4 TEST SETUP



10.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



10.1.6 TEST RESULTS

| | | | |
|----------------|-----------------|---------------------|---------|
| EUT : | Wireless router | Model Name : | DIR-815 |
| Temperature : | 25 °C | Relative Humidity : | 58 % |
| Test Voltage : | AC 120V/60Hz | | |
| Test Mode : | Band 1 | | |

Voltage vs. Frequency Stability

| Voltage | Measurement Frequency (MHz) |
|----------------------|------------------------------------|
| (V) | 5180 |
| 138 | 5179.983000 |
| 120 | 5179.986000 |
| 102 | 5179.985000 |
| Max. Deviation (MHz) | 0.017000 |
| Max. Deviation (ppm) | 3.28 |

Temperature vs. Frequency Stability

| Temperature | Measurement Frequency (MHz) |
|----------------------|------------------------------------|
| (°C) | 5180 |
| 0 | 5179.987000 |
| 10 | 5179.985000 |
| 20 | 5179.982000 |
| 30 | 5179.985000 |
| 40 | 5179.982000 |
| 50 | 5179.985000 |
| Max. Deviation (MHz) | 0.018000 |
| Max. Deviation (ppm) | 3.47 |



11. EUT TEST PHOTO

**Conducted Measurement Photos
Adapter: S06A22-120A050-PB**





**Conducted Measurement Photos
Adapter: F05W-120050SPAU**







**Radiated Measurement Photos
9K~30MHz**





**Radiated Measurement Photos
30~1000MHz**

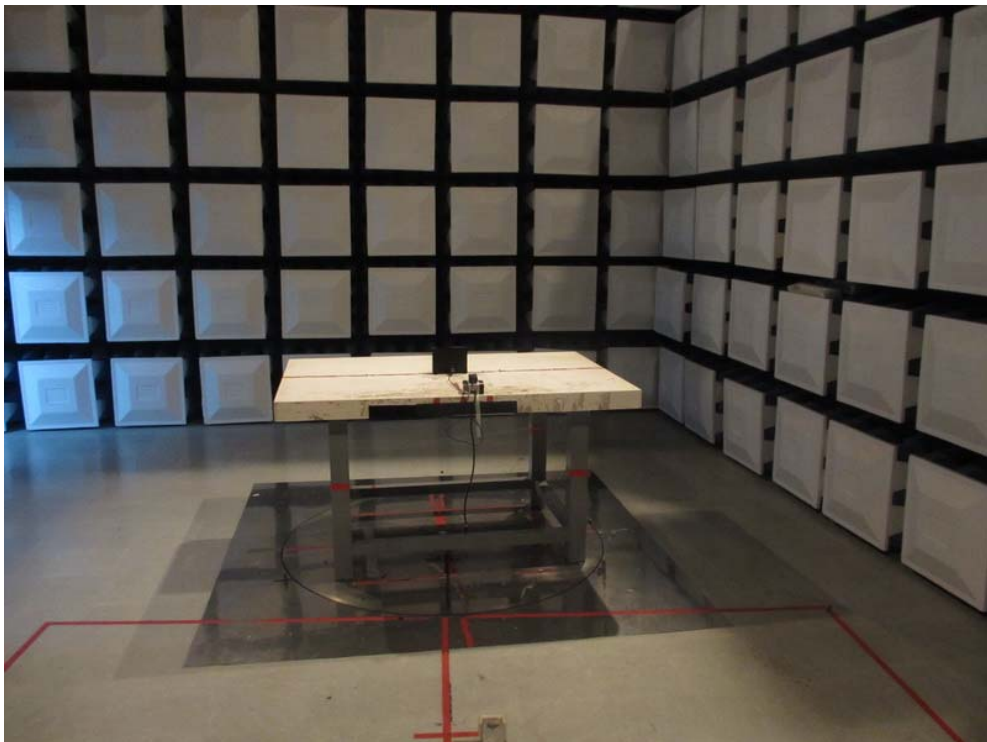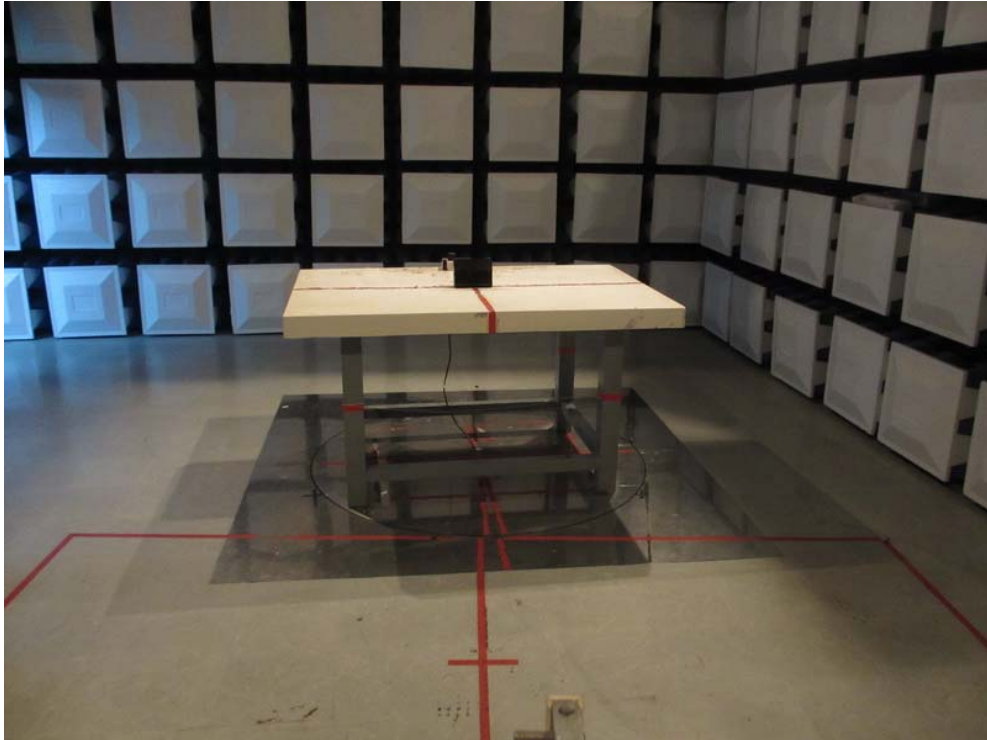



**Radiated Measurement Photos
Above 1000MHz**

