



FCC TEST REPORT (15.247)

REPORT NO.: RF130822E12

MODEL NO.: DIR-816L

FCC ID: KA2IR816LA1

RECEIVED: Aug. 22, 2013

TESTED: Aug. 22 to 28, 2013

ISSUED: Sep. 05, 2013

APPLICANT: D-Link Corporation

ADDRESS: No.289, Sinhu 3rd Rd., Neihu District, Taipei
City 114, Taiwan, R.O.C

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	8
3. GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	13
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	14
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
3.4 DESCRIPTION OF SUPPORT UNITS	18
3.5 CONFIGURATION OF SYSTEM UNDER TEST	19
4. TEST TYPES AND RESULTS (FOR 2.4GHZ, 2.400 ~ 2.4835GHZ BAND).....	20
4.1 CONDUCTED EMISSION MEASUREMENT	20
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	20
4.1.2 TEST INSTRUMENTS.....	20
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD	21
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	22
4.1.7 TEST RESULTS (MODE 1)	23
4.1.8 TEST RESULTS (MODE 2)	25
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	27
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	27
4.2.2 TEST INSTRUMENTS.....	28
4.2.3 TEST PROCEDURES	30
4.2.4 DEVIATION FROM TEST STANDARD	30
4.2.5 TEST SETUP	31
4.2.6 EUT OPERATING CONDITIONS	31
4.2.7 TEST RESULTS	32
4.3 6DB BANDWIDTH MEASUREMENT	45
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	45
4.3.2 TEST INSTRUMENTS.....	45
4.3.3 TEST PROCEDURE.....	45
4.3.4 DEVIATION FROM TEST STANDARD	45
4.3.5 TEST SETUP	45
4.3.6 EUT OPERATING CONDITIONS	45
4.3.7 TEST RESULTS	46
4.4 CONDUCTED OUTPUT POWER MEASUREMENT	47
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	47
4.4.2 INSTRUMENTS.....	47
4.4.3 TEST PROCEDURES	47
4.4.4 DEVIATION FROM TEST STANDARD	48
4.4.5 TEST SETUP	48
4.4.6 EUT OPERATING CONDITIONS	48
4.4.7 TEST RESULTS	49
4.5 AVERAGE OUTPUT POWER.....	50
4.5.1 FOR REFERENCE.....	50
4.5.2 TEST INSTRUMENTS.....	50
4.5.3 TEST PROCEDURES	50
4.5.4 TEST SETUP	50



A D T

4.5.5	EUT OPERATING CONDITIONS	50
4.5.6	TEST RESULTS	51
4.6	POWER SPECTRAL DENSITY MEASUREMENT	52
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	52
4.6.2	TEST INSTRUMENTS.....	52
4.6.3	TEST PROCEDURE.....	52
4.6.4	DEVIATION FROM TEST STANDARD	52
4.6.5	TEST SETUP	52
4.6.6	EUT OPERATING CONDITION.....	52
4.6.7	TEST RESULTS	53
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	55
4.7.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	55
4.7.2	TEST INSTRUMENTS.....	55
4.7.3	TEST PROCEDURE.....	55
4.7.4	DEVIATION FROM TEST STANDARD	56
4.7.5	TEST SETUP	56
4.7.6	EUT OPERATING CONDITION.....	56
4.7.7	TEST RESULTS	56
5.	TEST TYPES AND RESULTS (FOR 5GHZ, 5.725~5.850GHZ BAND)	65
5.1	CONDUCTED EMISSION MEASUREMENT	65
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	65
5.1.2	TEST INSTRUMENTS.....	65
5.1.3	TEST PROCEDURES	66
5.1.4	DEVIATION FROM TEST STANDARD	66
5.1.5	TEST SETUP	66
5.1.6	EUT OPERATING CONDITIONS	67
5.1.7	TEST RESULTS (MODE 1)	68
5.1.8	TEST RESULTS (MODE 2)	70
5.2	RADIATED AND BANDEDGE EMISSION MEASUREMENT.....	72
5.2.1	LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT.....	72
5.2.2	TEST INSTRUMENTS.....	73
5.2.3	TEST PROCEDURES	75
5.2.4	DEVIATION FROM TEST STANDARD	75
5.2.5	TEST SETUP	76
5.2.6	EUT OPERATING CONDITIONS	76
5.2.7	TEST RESULTS	77
5.3	6DB BANDWIDTH MEASUREMENT	87
5.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	87
5.3.2	TEST INSTRUMENTS.....	87
5.3.3	TEST PROCEDURE.....	87
5.3.4	DEVIATION FROM TEST STANDARD	87
5.3.5	TEST SETUP	87
5.3.6	EUT OPERATING CONDITIONS	87
5.3.7	TEST RESULTS	88
5.4	CONDUCTED OUTPUT POWER MEASUREMENT	89
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	89
5.4.2	INSTRUMENTS.....	89
5.4.3	TEST PROCEDURES	89
5.4.4	DEVIATION FROM TEST STANDARD	90
5.4.5	TEST SETUP	90
5.4.6	EUT OPERATING CONDITIONS	90
5.4.7	TEST RESULTS	91



A D T

5.5	AVERAGE OUTPUT POWER.....	92
5.5.1	FOR REFERENCE.....	92
5.5.2	TEST INSTRUMENTS.....	92
5.5.3	TEST PROCEDURES	92
5.5.4	TEST SETUP	92
5.5.5	EUT OPERATING CONDITIONS	92
5.5.6	TEST RESULTS	93
5.6	POWER SPECTRAL DENSITY MEASUREMENT.....	94
5.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	94
5.6.2	TEST INSTRUMENTS.....	94
5.6.3	TEST PROCEDURE.....	94
5.6.4	DEVIATION FROM TEST STANDARD	94
5.6.5	TEST SETUP	94
5.6.6	EUT OPERATING CONDITION.....	94
5.6.7	TEST RESULTS	95
5.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	96
5.7.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	96
5.7.2	TEST INSTRUMENTS.....	96
5.7.3	TEST PROCEDURE.....	96
5.7.4	DEVIATION FROM TEST STANDARD	97
5.7.5	TEST SETUP	97
5.7.6	EUT OPERATING CONDITION.....	97
5.7.7	TEST RESULTS	97
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	101
7.	INFORMATION ON THE TESTING LABORATORIES	102
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	103



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130822E12	Original release	Sep. 05, 2013

1. CERTIFICATION

PRODUCT: Wireless AC750 Dual Band Cloud Router
BRAND NAME: D-Link
MODEL NO.: DIR-816L
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: D-Link Corporation
TESTED: Aug. 22 to 28, 2013
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: DIR-816L) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Sep. 05, 2013
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** Sep. 05, 2013
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 2.4GHz, 2400~2483.5MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.55dB at 0.47813MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.3dB at 2390.00MHz & 2483.50MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

For 5GHz, 5725~5850MHz Band

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.45dB at 0.47813MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -6.4dB at 11650.00MHz & 11590.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-pex not a standard connector.

NOTE:

The EUT was operating in 2.400 ~ 2.4835GHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2.400 ~ 2.4835GHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.46 dB
Radiated emissions (1GHz -6GHz)	3.73 dB
Radiated emissions (6GHz -18GHz)	3.90 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless AC750 Dual Band Cloud Router
MODEL NO.	DIR-816L
POWER SUPPLY	DC 12V from adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only.
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 433.3Mbps
OPERATING FREQUENCY	For 15.407 5GHz: 5.18 ~ 5.24GHz For 15.247 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) For 15.247 (5GHz) 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)

MAXIMUM OUTPUT POWER	<p>For 15.407</p> <p>802.11a: 41.020mW 802.11n (HT20): 41.591mW 802.11n (HT40): 48.865mW 802.11ac (VHT80): 38.548mW</p> <p>For 15.247 (2.4GHz)</p> <p>802.11b: 113.767mW 802.11g: 893.330mW 802.11n (HT20): 887.774mW 802.11n (HT40): 448.126mW</p> <p>For 15.247 (5GHz)</p> <p>802.11a: 257.632mW 802.11n (HT20): 253.513mW 802.11n (HT40): 231.739mW 802.11ac (VHT80): 381.944mW</p>
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

NOTE:

1. The EUT is a 2.4GHz & 5GHz WLAN device.
2. The emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.



A D T

3. The antennas provided to the EUT, please refer to the following table:

Set 1							
Ant.	Transmitter Circuit	Model	Gain (dBi) (Include cable loss)	Antenna Type	Connector Type	Frequency range (MHz to MHz)	Cable Length (mm)
A	Chain (1)	290-20061	2.64	Dipole	NA	2400~2500	170
	Chain (0)		2.67	Dipole	I-pex	5150~5250	60
			3.67			5725~5850	
B	Chain (0)	290-20068	3.93	Dipole	NA	2400~2500	90
Set 2							
Ant.	Transmitter Circuit	Model	Gain (dBi) (Include cable loss)	Antenna Type	Connector Type	Frequency range (MHz to MHz)	Cable Length (mm)
A	Chain (1)	290-20061	2.64	Dipole	NA	2400~2500	170
	Chain (0)		2.67	Dipole	I-pex	5150~5250	60
			3.67			5725~5850	
B	Chain (0)	290-20065	3.0	Dipole	NA	2400~2500	90

From the above antennas, antenna set 1 was selected for the test and its data was recorded in this report.

4. The EUT must be supplied with a power adapter as following table:

No	Brand	Model No.	Spec.
1	D-Link	AMS9-1201000FU2	Input: 100-240V, 0.5A, 50/60Hz Output: 12V, 1A DC output cable (Unshielded, 1.5m)
2	D-Link	F12W3-120100SPAU	Input: 100-240V, 0.3A, 50/60Hz Output: 12V, 1A DC output cable (Unshielded, 1.5m)

Note:

1. For radiated emissions test, the EUT was pre-tested with above Adapter, the worst case was found in Adapter 2. Therefore only the test data of the Adapter 2 was recorded in this report.

5. The EUT incorporates a MIMO function without beam forming.

MODULATION MODE	TX/RX FUNCTION
802.11a	1TX/1RX
802.11b	2TX/2RX
802.11g	2TX/2RX
2.4GHz: 802.11n (HT20)	2TX/2RX
2.4GHz: 802.11n (HT40)	2TX/2RX
5GHz: 802.11n (HT20)	1TX/1RX
5GHz: 802.11n (HT40)	1TX/1RX
802.11ac (VHT20)	1TX/1RX
802.11ac (VHT40)	1TX/1RX
802.11ac (VHT80)	1TX/1RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.3)

6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, for 2.4GHz: MCS (Modulation and Coding Schemes) from 0 to 15; for 5GHz: MCS (Modulation and Coding Schemes) from 0 to 7.
7. When the EUT operating in 802.11ac, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 9.
8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

Operated in 5725 ~ 5850MHz band:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

CHANNEL	FREQUENCY
155	5775 MHz



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
MODE 1	√	-	-	-	-	With adapter 1
MODE 2	√	√	√	√	√	With adapter 2

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	29.3



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	29.3



A D T

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
For 5 GHz 802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 63%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	25deg. C, 68%RH	120Vac, 60Hz	Tim Ho
RE ³ 1G	23deg. C, 67%RH	120Vac, 60Hz	Tim Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng
OB	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v01 r02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
2	HUB	ZyXEL	ES-116P	S060H02000215	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (10m)
2	UTP cable (10m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

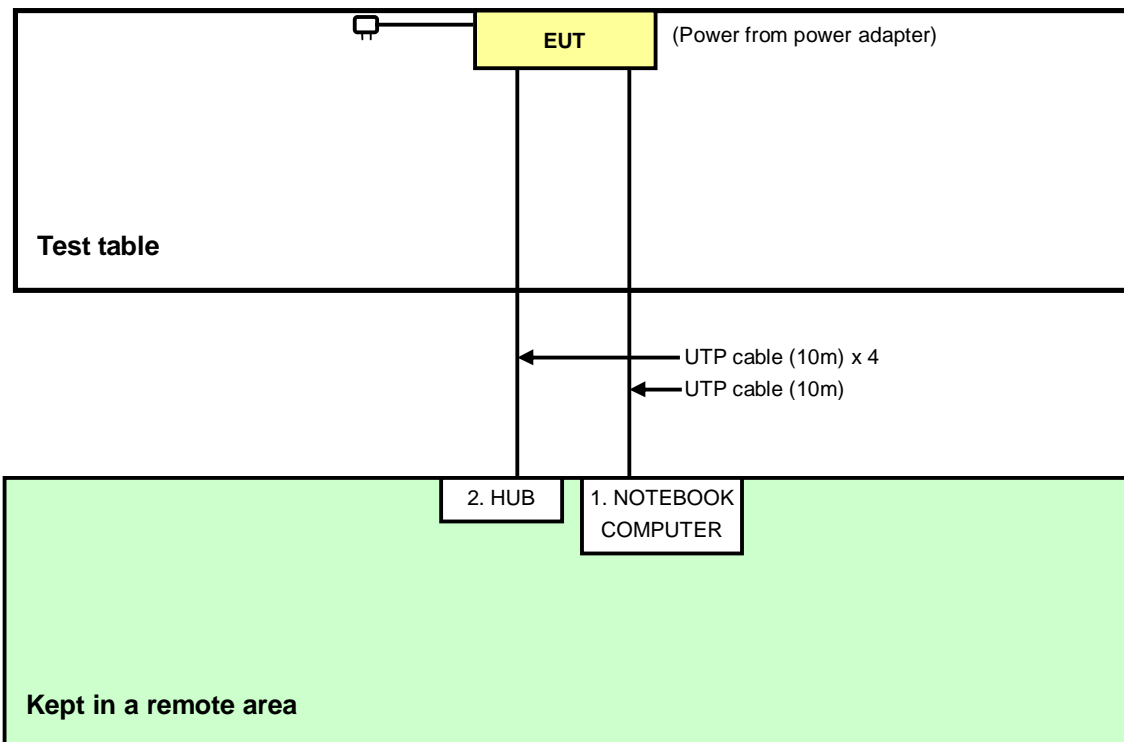



A D T

4. TEST TYPES AND RESULTS (FOR 2.4GHz, 2.400 ~ 2.4835GHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 28, 2013	Feb. 27, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 24, 2012	Sep. 23, 2013
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	8487731004	Oct. 29, 2012	Oct. 28, 2013
RF Cable (JYEBAO)	5DFB	COACAB-001	May 27, 2013	May 26, 2014
50 ohms Terminator	50	3	Oct. 16, 2012	Oct. 15, 2013
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Aug. 28, 2013

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

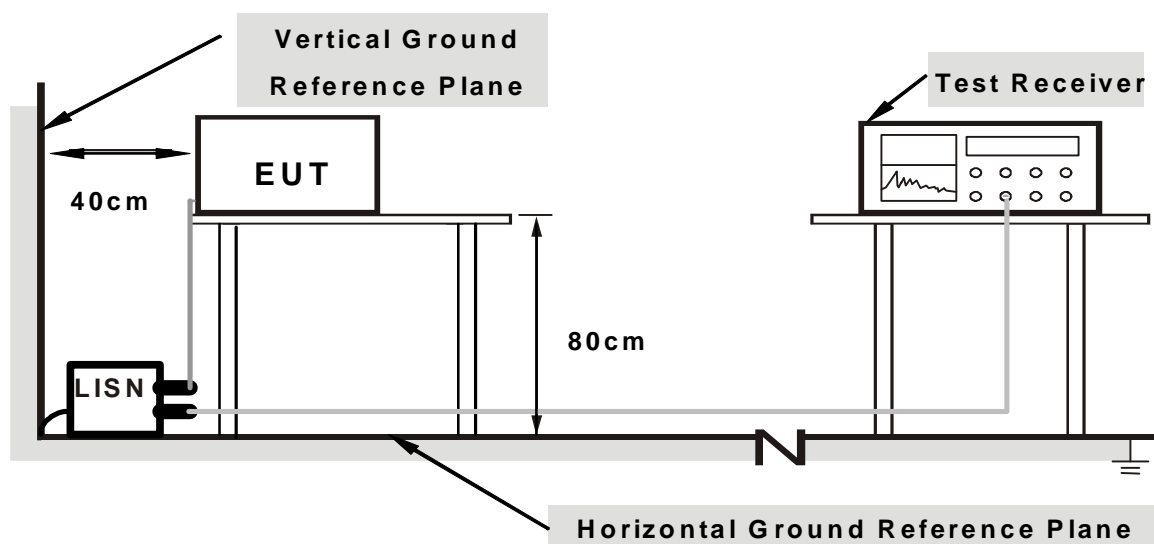

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Turn on the power of EUT.
2. The communication partner run test program “MP_TEST.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.13	41.88	39.01	42.01	39.14	65.18	55.18	-23.16	-16.03
2	0.20469	0.14	38.07	22.17	38.21	22.31	63.42	53.42	-25.21	-31.11
3	0.39219	0.20	32.30	22.71	32.50	22.91	58.02	48.02	-25.52	-25.11
4	0.53281	0.21	27.17	15.28	27.38	15.49	56.00	46.00	-28.62	-30.51
5	2.46484	0.35	32.88	23.40	33.23	23.75	56.00	46.00	-22.77	-22.25
6	13.48828	1.09	32.12	21.69	33.21	22.78	60.00	50.00	-26.79	-27.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

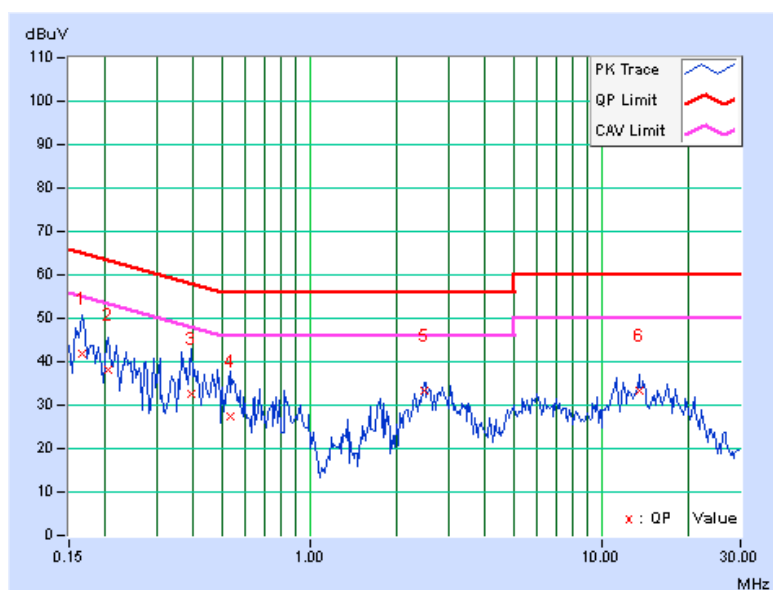


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. (dB)	AV. (dB)
1	0.19687	0.12	36.85	24.55	36.97	24.67	63.74	53.74	-26.77	-29.07
2	0.26719	0.14	34.03	14.75	34.17	14.89	61.20	51.20	-27.03	-36.31
3	0.30625	0.16	32.44	13.61	32.60	13.77	60.07	50.07	-27.47	-36.30
4	0.42344	0.19	28.30	18.20	28.49	18.39	57.38	47.38	-28.89	-28.99
5	0.55625	0.20	26.25	16.22	26.45	16.42	56.00	46.00	-29.55	-29.58
6	12.96484	0.83	24.36	14.72	25.19	15.55	60.00	50.00	-34.81	-34.45

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

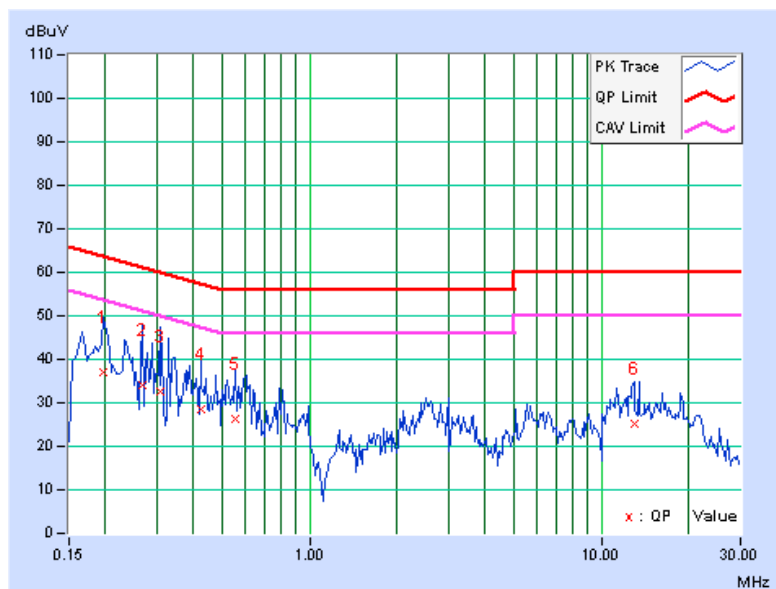



A D T


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.41563	0.20	41.48	32.64	41.68	32.84	57.54	47.54	-15.85	-14.69
2	0.47813	0.21	49.10	40.61	49.31	40.82	56.37	46.37	-7.06	-5.55
3	0.64219	0.22	37.50	27.57	37.72	27.79	56.00	46.00	-18.28	-18.21
4	0.95078	0.25	37.38	28.04	37.63	28.29	56.00	46.00	-18.37	-17.71
5	1.66406	0.30	37.50	27.86	37.80	28.16	56.00	46.00	-18.20	-17.84
6	3.14063	0.40	36.43	27.07	36.83	27.47	56.00	46.00	-19.17	-18.53

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

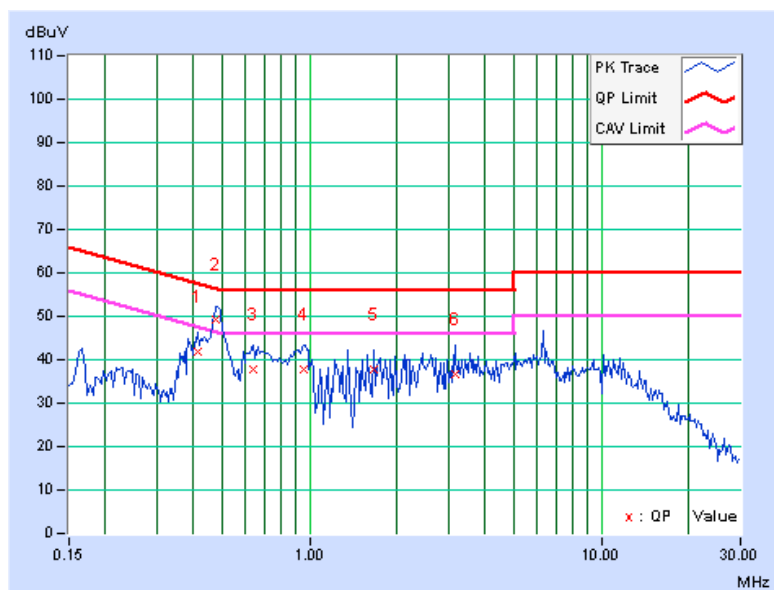


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.47813	0.19	42.41	37.32	42.60	37.51	56.37	46.37	-13.77	-8.86
2	0.89609	0.21	31.21	22.56	31.42	22.77	56.00	46.00	-24.58	-23.23
3	1.48828	0.25	31.95	23.90	32.20	24.15	56.00	46.00	-23.80	-21.85
4	2.59766	0.32	34.41	24.61	34.73	24.93	56.00	46.00	-21.27	-21.07
5	6.03125	0.50	38.15	27.20	38.65	27.70	60.00	50.00	-21.35	-22.30
6	9.27734	0.66	35.89	25.46	36.55	26.12	60.00	50.00	-23.45	-23.88

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

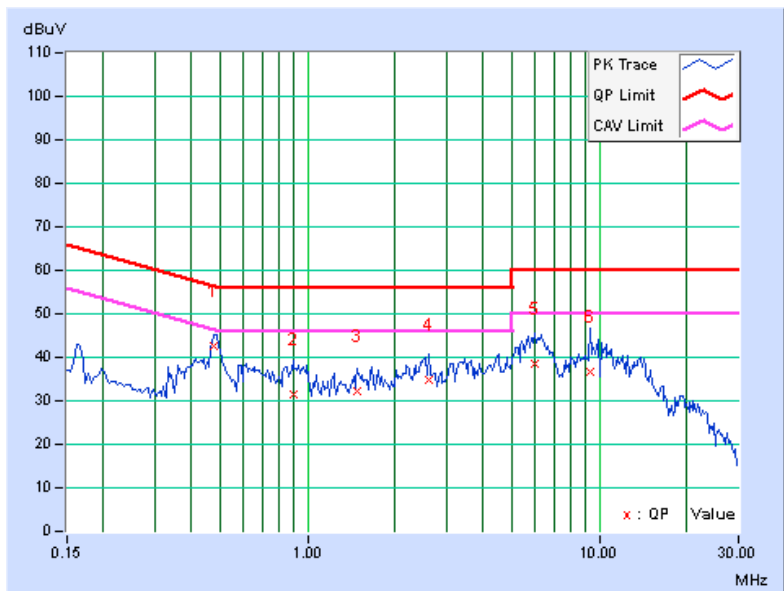

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.

4.2.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 30, 2012	Oct. 29, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Mar. 25, 2013	Mar. 24, 2014
Horn_Antenna AISI	AIH.8018	000022009111 0	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Aug. 23, 2013



A D T

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 29, 2013	Jan. 28, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
Pre-Amplifier SPACEK LABS	SLKka-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Mar. 19, 2013	Mar. 18, 2014
Horn_Antenna AISL	AIH.8018	000032009111 0	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Aug. 23, 2013

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

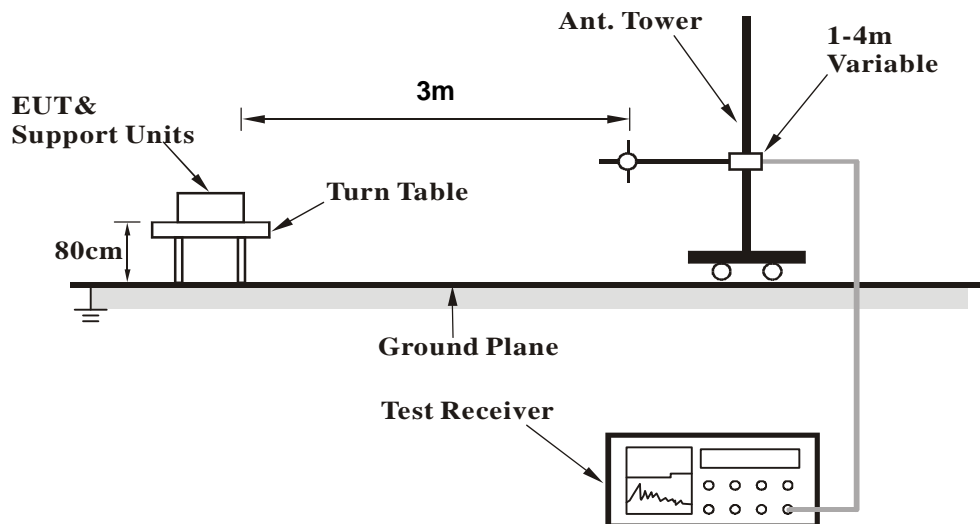

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	147.56	32.3 QP	43.5	-11.2	2.00 H	77	45.73	-13.43
2	177.63	33.2 QP	43.5	-10.3	1.50 H	105	47.78	-14.54
3	321.29	27.7 QP	46.0	-18.3	1.00 H	324	38.95	-11.28
4	335.50	27.8 QP	46.0	-18.2	1.00 H	135	38.95	-11.14
5	387.49	30.6 QP	46.0	-15.4	1.00 H	323	40.70	-10.10
6	722.97	30.4 QP	46.0	-15.6	1.00 H	248	34.20	-3.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.80	32.2 QP	40.0	-7.8	1.00 V	0	45.68	-13.48
2	106.73	27.3 QP	43.5	-16.3	1.00 V	232	43.82	-16.57
3	184.47	32.7 QP	43.5	-10.8	1.00 V	75	48.13	-15.47
4	335.65	28.0 QP	46.0	-18.0	1.00 V	0	39.12	-11.15
5	439.53	27.9 QP	46.0	-18.1	2.00 V	202	36.42	-8.48
6	529.36	30.1 QP	46.0	-15.9	1.00 V	82	37.18	-7.12

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	54.9 PK	74.0	-19.1	1.07 H	304	56.11	-1.21
2	2386.00	43.9 AV	54.0	-10.1	1.07 H	304	45.11	-1.21
3	*2412.00	99.3 PK			1.07 H	304	100.39	-1.09
4	*2412.00	95.7 AV			1.07 H	304	96.79	-1.09
5	4824.00	54.4 PK	74.0	-19.6	1.91 H	18	46.81	7.59
6	4824.00	49.5 AV	54.0	-4.5	1.91 H	18	41.91	7.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	57.5 PK	74.0	-16.5	1.00 V	160	58.71	-1.21
2	2386.00	48.2 AV	54.0	-5.8	1.00 V	160	49.41	-1.21
3	*2412.00	105.1 PK			1.00 V	160	106.19	-1.09
4	*2412.00	101.4 AV			1.00 V	160	102.49	-1.09
5	4824.00	57.1 PK	74.0	-16.9	1.86 V	314	49.51	7.59
6	4824.00	53.5 AV	54.0	-0.5	1.86 V	314	45.91	7.59

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.9 PK	74.0	-21.1	1.07 H	308	54.09	-1.19
2	2390.00	40.8 AV	54.0	-13.2	1.07 H	308	41.99	-1.19
3	*2437.00	100.2 PK			1.07 H	308	101.19	-0.99
4	*2437.00	96.5 AV			1.07 H	308	97.49	-0.99
5	2483.50	53.2 PK	74.0	-20.8	1.07 H	308	54.00	-0.80
6	2483.50	40.7 AV	54.0	-13.3	1.07 H	308	41.50	-0.80
7	4874.00	54.0 PK	74.0	-20.0	1.94 H	7	46.23	7.77
8	4874.00	49.2 AV	54.0	-4.8	1.94 H	7	41.43	7.77
9	7311.00	54.6 PK	74.0	-19.4	1.00 H	218	39.11	15.49
10	7311.00	42.4 AV	54.0	-11.6	1.00 H	218	26.91	15.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.0 PK	74.0	-21.0	1.00 V	161	54.19	-1.19
2	2390.00	40.8 AV	54.0	-13.2	1.00 V	161	41.99	-1.19
3	*2437.00	105.7 PK			1.00 V	161	106.69	-0.99
4	*2437.00	101.8 AV			1.00 V	161	102.79	-0.99
5	2483.50	53.9 PK	74.0	-20.1	1.00 V	161	54.70	-0.80
6	2483.50	41.2 AV	54.0	-12.8	1.00 V	161	42.00	-0.80
7	4874.00	56.6 PK	74.0	-17.4	1.84 V	315	48.83	7.77
8	4874.00	53.5 AV	54.0	-0.5	1.84 V	315	45.73	7.77
9	7311.00	54.8 PK	74.0	-19.2	1.04 V	132	39.31	15.49
10	7311.00	42.8 AV	54.0	-11.2	1.04 V	132	27.31	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.9 PK			1.11 H	313	100.79	-0.89
2	*2462.00	96.2 AV			1.11 H	313	97.09	-0.89
3	2483.50	54.7 PK	74.0	-19.3	1.11 H	313	55.50	-0.80
4	2483.50	43.6 AV	54.0	-10.4	1.11 H	313	44.40	-0.80
5	4924.00	54.1 PK	74.0	-19.9	1.92 H	14	46.16	7.94
6	4924.00	49.4 AV	54.0	-4.6	1.92 H	14	41.46	7.94
7	7386.00	54.9 PK	74.0	-19.1	1.00 H	215	39.39	15.51
8	7386.00	42.8 AV	54.0	-11.2	1.00 H	215	27.29	15.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.1 PK			1.00 V	161	105.99	-0.89
2	*2462.00	101.5 AV			1.00 V	161	102.39	-0.89
3	2483.50	58.1 PK	74.0	-15.9	1.00 V	161	58.90	-0.80
4	2483.50	47.1 AV	54.0	-6.9	1.00 V	161	47.90	-0.80
5	4924.00	56.6 PK	74.0	-17.4	1.84 V	315	48.66	7.94
6	4924.00	53.5 AV	54.0	-0.5	1.84 V	315	45.56	7.94
7	7386.00	55.1 PK	74.0	-18.9	1.00 V	122	39.59	15.51
8	7386.00	43.1 AV	54.0	-10.9	1.00 V	122	27.59	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	1.14 H	305	64.99	-1.19
2	2390.00	48.7 AV	54.0	-5.3	1.14 H	305	49.89	-1.19
3	*2412.00	99.3 PK			1.14 H	305	100.39	-1.09
4	*2412.00	89.6 AV			1.14 H	305	90.69	-1.09
5	4824.00	51.1 PK	74.0	-22.9	1.97 H	18	43.51	7.59
6	4824.00	43.2 AV	54.0	-10.8	1.97 H	18	35.61	7.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.00 V	159	69.29	-1.19
2	2390.00	53.2 AV	54.0	-0.8	1.00 V	159	54.39	-1.19
3	*2412.00	108.2 PK			1.00 V	159	109.29	-1.09
4	*2412.00	98.8 AV			1.00 V	159	99.89	-1.09
5	4824.00	52.7 PK	74.0	-21.3	1.79 V	313	45.11	7.59
6	4824.00	44.9 AV	54.0	-9.1	1.79 V	313	37.31	7.59

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	1.15 H	303	56.09	-1.19
2	2390.00	40.6 AV	54.0	-13.4	1.15 H	303	41.79	-1.19
3	*2437.00	102.7 PK			1.15 H	303	103.69	-0.99
4	*2437.00	93.5 AV			1.15 H	303	94.49	-0.99
5	2483.50	54.5 PK	74.0	-19.5	1.15 H	303	55.30	-0.80
6	2483.50	40.4 AV	54.0	-13.6	1.15 H	303	41.20	-0.80
7	4874.00	50.6 PK	74.0	-23.4	1.97 H	21	42.83	7.77
8	4874.00	42.7 AV	54.0	-11.3	1.97 H	21	34.93	7.77
9	7311.00	55.4 PK	74.0	-18.6	1.11 H	201	39.91	15.49
10	7311.00	43.2 AV	54.0	-10.8	1.11 H	201	27.71	15.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.00 V	161	59.79	-1.19
2	2390.00	44.2 AV	54.0	-9.8	1.00 V	161	45.39	-1.19
3	*2437.00	111.8 PK			1.00 V	161	112.79	-0.99
4	*2437.00	102.5 AV			1.00 V	161	103.49	-0.99
5	2483.50	57.9 PK	74.0	-16.1	1.00 V	161	58.70	-0.80
6	2483.50	43.9 AV	54.0	-10.1	1.00 V	161	44.70	-0.80
7	4874.00	53.0 PK	74.0	-21.0	1.84 V	313	45.23	7.77
8	4874.00	44.9 AV	54.0	-9.1	1.84 V	313	37.13	7.77
9	7311.00	55.4 PK	74.0	-18.6	1.22 V	112	39.91	15.49
10	7311.00	43.4 AV	54.0	-10.6	1.22 V	112	27.91	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.4 PK			1.20 H	318	101.29	-0.89
2	*2462.00	91.0 AV			1.20 H	318	91.89	-0.89
3	2483.50	64.6 PK	74.0	-9.4	1.20 H	318	65.40	-0.80
4	2483.50	49.2 AV	54.0	-4.8	1.20 H	318	50.00	-0.80
5	4924.00	50.7 PK	74.0	-23.3	1.98 H	26	42.76	7.94
6	4924.00	42.9 AV	54.0	-11.1	1.98 H	26	34.96	7.94
7	7386.00	55.2 PK	74.0	-18.8	1.07 H	203	39.69	15.51
8	7386.00	42.9 AV	54.0	-11.1	1.07 H	203	27.39	15.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.5 PK			1.00 V	161	110.39	-0.89
2	*2462.00	100.1 AV			1.00 V	161	100.99	-0.89
3	2483.50	68.2 PK	74.0	-5.8	1.00 V	161	69.00	-0.80
4	2483.50	53.0 AV	54.0	-1.0	1.00 V	161	53.80	-0.80
5	4924.00	53.6 PK	74.0	-20.4	1.85 V	301	45.66	7.94
6	4924.00	45.2 AV	54.0	-8.8	1.85 V	301	37.26	7.94
7	7386.00	55.5 PK	74.0	-18.5	1.25 V	96	39.99	15.51
8	7386.00	43.3 AV	54.0	-10.7	1.25 V	96	27.79	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.19 H	310	66.09	-1.19
2	2390.00	49.9 AV	54.0	-4.1	1.19 H	310	51.09	-1.19
3	*2412.00	98.8 PK			1.19 H	310	99.89	-1.09
4	*2412.00	86.1 AV			1.19 H	310	87.19	-1.09
5	4824.00	50.4 PK	74.0	-23.6	2.03 H	21	42.81	7.59
6	4824.00	42.5 AV	54.0	-11.5	2.03 H	21	34.91	7.59
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.00 V	159	69.49	-1.19
2	2390.00	53.4 AV	54.0	-0.6	1.00 V	159	54.59	-1.19
3	*2412.00	107.6 PK			1.00 V	159	108.69	-1.09
4	*2412.00	95.1 AV			1.00 V	159	96.19	-1.09
5	4824.00	53.4 PK	74.0	-20.6	1.89 V	310	45.81	7.59
6	4824.00	45.2 AV	54.0	-8.8	1.89 V	310	37.61	7.59

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	1.22 H	308	56.29	-1.19
2	2390.00	40.6 AV	54.0	-13.4	1.22 H	308	41.79	-1.19
3	*2437.00	101.4 PK			1.22 H	308	102.39	-0.99
4	*2437.00	91.7 AV			1.22 H	308	92.69	-0.99
5	2483.50	53.7 PK	74.0	-20.3	1.22 H	308	54.50	-0.80
6	2483.50	39.7 AV	54.0	-14.3	1.22 H	308	40.50	-0.80
7	4874.00	51.0 PK	74.0	-23.0	2.00 H	28	43.23	7.77
8	4874.00	42.8 AV	54.0	-11.2	2.00 H	28	35.03	7.77
9	7311.00	54.9 PK	74.0	-19.1	1.06 H	186	39.41	15.49
10	7311.00	42.8 AV	54.0	-11.2	1.06 H	186	27.31	15.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	1.00 V	160	62.19	-1.19
2	2390.00	43.2 AV	54.0	-10.8	1.00 V	160	44.39	-1.19
3	*2437.00	110.6 PK			1.00 V	160	111.59	-0.99
4	*2437.00	100.8 AV			1.00 V	160	101.79	-0.99
5	2483.50	59.5 PK	74.0	-14.5	1.00 V	160	60.30	-0.80
6	2483.50	43.7 AV	54.0	-10.3	1.00 V	160	44.50	-0.80
7	4874.00	53.3 PK	74.0	-20.7	1.81 V	316	45.53	7.77
8	4874.00	45.2 AV	54.0	-8.8	1.81 V	316	37.43	7.77
9	7311.00	55.3 PK	74.0	-18.7	1.28 V	126	39.81	15.49
10	7311.00	43.1 AV	54.0	-10.9	1.28 V	126	27.61	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.0 PK			1.23 H	296	99.89	-0.89
2	*2462.00	89.0 AV			1.23 H	296	89.89	-0.89
3	2483.50	63.0 PK	74.0	-11.0	1.23 H	296	63.80	-0.80
4	2483.50	49.1 AV	54.0	-4.9	1.23 H	296	49.90	-0.80
5	4924.00	50.9 PK	74.0	-23.1	1.96 H	28	42.96	7.94
6	4924.00	43.2 AV	54.0	-10.8	1.96 H	28	35.26	7.94
7	7386.00	55.6 PK	74.0	-18.4	1.16 H	216	40.09	15.51
8	7386.00	43.5 AV	54.0	-10.5	1.16 H	216	27.99	15.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.7 PK			1.00 V	160	109.59	-0.89
2	*2462.00	98.5 AV			1.00 V	160	99.39	-0.89
3	2483.50	67.5 PK	74.0	-6.5	1.00 V	160	68.30	-0.80
4	2483.50	53.4 AV	54.0	-0.6	1.00 V	160	54.20	-0.80
5	4924.00	52.5 PK	74.0	-21.5	1.84 V	322	44.56	7.94
6	4924.00	44.7 AV	54.0	-9.3	1.84 V	322	36.76	7.94
7	7386.00	55.8 PK	74.0	-18.2	1.26 V	106	40.29	15.51
8	7386.00	43.5 AV	54.0	-10.5	1.26 V	106	27.99	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	1.23 H	289	63.89	-1.19
2	2390.00	49.7 AV	54.0	-4.3	1.23 H	289	50.89	-1.19
3	*2422.00	95.0 PK			1.23 H	289	96.05	-1.05
4	*2422.00	84.8 AV			1.23 H	289	85.85	-1.05
5	4844.00	50.3 PK	74.0	-23.7	1.92 H	30	42.64	7.66
6	4844.00	42.7 AV	54.0	-11.3	1.92 H	30	35.04	7.66
7	7266.00	55.8 PK	74.0	-18.2	1.12 H	208	40.29	15.51
8	7266.00	43.4 AV	54.0	-10.6	1.12 H	208	27.89	15.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.00 V	162	67.59	-1.19
2	2390.00	53.3 AV	54.0	-0.7	1.00 V	162	54.49	-1.19
3	*2422.00	104.4 PK			1.00 V	162	105.45	-1.05
4	*2422.00	94.3 AV			1.00 V	162	95.35	-1.05
5	4844.00	52.4 PK	74.0	-21.6	1.84 V	316	44.74	7.66
6	4844.00	44.6 AV	54.0	-9.4	1.84 V	316	36.94	7.66
7	7266.00	55.3 PK	74.0	-18.7	1.20 V	108	39.79	15.51
8	7266.00	43.2 AV	54.0	-10.8	1.20 V	108	27.69	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	1.23 H	280	64.39	-1.19
2	2390.00	49.4 AV	54.0	-4.6	1.23 H	280	50.59	-1.19
3	*2437.00	98.6 PK			1.23 H	280	99.59	-0.99
4	*2437.00	88.5 AV			1.23 H	280	89.49	-0.99
5	2483.50	64.7 PK	74.0	-9.3	1.23 H	280	65.50	-0.80
6	2483.50	49.7 AV	54.0	-4.3	1.23 H	280	50.50	-0.80
7	4874.00	51.1 PK	74.0	-22.9	1.92 H	7	43.33	7.77
8	4874.00	43.2 AV	54.0	-10.8	1.92 H	7	35.43	7.77
9	7311.00	55.2 PK	74.0	-18.8	1.05 H	202	39.71	15.49
10	7311.00	43.2 AV	54.0	-10.8	1.05 H	202	27.71	15.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.00 V	161	68.79	-1.19
2	2390.00	53.7 AV	54.0	-0.3	1.00 V	161	54.89	-1.19
3	*2437.00	107.3 PK			1.00 V	161	108.29	-0.99
4	*2437.00	97.1 AV			1.00 V	161	98.09	-0.99
5	2483.50	68.6 PK	74.0	-5.4	1.00 V	161	69.40	-0.80
6	2483.50	53.5 AV	54.0	-0.5	1.00 V	161	54.30	-0.80
7	4874.00	52.4 PK	74.0	-21.6	1.90 V	305	44.63	7.77
8	4874.00	44.6 AV	54.0	-9.4	1.90 V	305	36.83	7.77
9	7311.00	55.9 PK	74.0	-18.1	1.17 V	117	40.41	15.49
10	7311.00	43.9 AV	54.0	-10.1	1.17 V	117	28.41	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.6 PK			1.20 H	288	96.52	-0.92
2	*2452.00	85.8 AV			1.20 H	288	86.72	-0.92
3	2483.50	62.8 PK	74.0	-11.2	1.20 H	288	63.60	-0.80
4	2483.50	49.9 AV	54.0	-4.1	1.20 H	288	50.70	-0.80
5	4904.00	50.4 PK	74.0	-23.6	1.91 H	30	42.52	7.88
6	4904.00	42.3 AV	54.0	-11.7	1.91 H	30	34.42	7.88
7	7356.00	55.0 PK	74.0	-19.0	1.12 H	188	39.51	15.49
8	7356.00	43.0 AV	54.0	-11.0	1.12 H	188	27.51	15.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.1 PK			1.00 V	163	106.02	-0.92
2	*2452.00	95.2 AV			1.00 V	163	96.12	-0.92
3	2483.50	66.5 PK	74.0	-7.5	1.00 V	163	67.30	-0.80
4	2483.50	53.7 AV	54.0	-0.3	1.00 V	163	54.50	-0.80
5	4904.00	52.5 PK	74.0	-21.5	1.83 V	307	44.62	7.88
6	4904.00	44.6 AV	54.0	-9.4	1.83 V	307	36.72	7.88
7	7356.00	55.2 PK	74.0	-18.8	1.18 V	104	39.71	15.49
8	7356.00	43.5 AV	54.0	-10.5	1.18 V	104	28.01	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.11	10.11	0.5	PASS
6	2437	10.12	10.12	0.5	PASS
11	2462	10.12	10.12	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.63	16.64	0.5	PASS
6	2437	16.62	16.62	0.5	PASS
11	2462	16.63	16.61	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.89	17.86	0.5	PASS
6	2437	17.90	17.89	0.5	PASS
11	2462	17.87	17.90	0.5	PASS

802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.57	36.55	0.5	PASS
6	2437	36.54	36.57	0.5	PASS
9	2452	36.56	36.55	0.5	PASS

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	1014008	Apr. 23, 2013	Apr. 22, 2014
Power Sensor	MA2411B	0917122	Apr. 23, 2013	Apr. 22, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013


4.4.3 TEST PROCEDURES

The peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

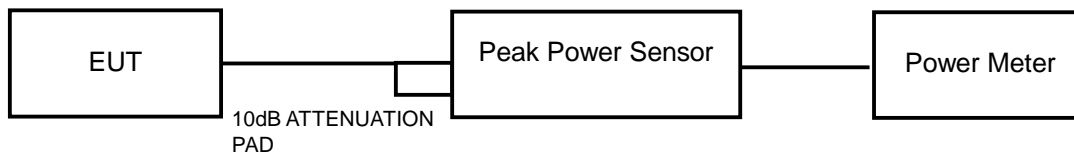

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.02	16.73	110.485	20.43	30	PASS
6	2437	18.06	16.91	113.064	20.53	30	PASS
11	2462	18.03	17.01	113.767	20.56	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	24.83	25.92	694.930	28.42	30	PASS
6	2437	25.83	27.08	893.330	29.51	30	PASS
11	2462	25.39	26.48	790.570	28.98	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	24.92	25.68	680.284	28.33	30	PASS
6	2437	25.78	27.07	887.774	29.48	30	PASS
11	2462	25.28	25.75	713.124	28.53	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	21.86	22.07	314.527	24.98	30	PASS
6	2437	23.77	23.22	448.126	26.51	30	PASS
9	2452	22.45	21.67	322.685	25.09	30	PASS

4.5 AVERAGE OUTPUT POWER

4.5.1 FOR REFERENCE.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	1014008	Apr. 23, 2013	Apr. 22, 2014
Power Sensor	MA2411B	0917122	Apr. 23, 2013	Apr. 22, 2014


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013

4.5.3 TEST PROCEDURES

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.4 TEST SETUP

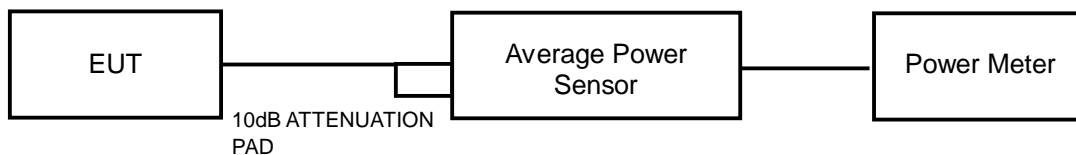

4.5.5 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.5.6 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	15.81	14.67	67.416	18.29
6	2437	15.85	14.85	69.008	18.39
11	2462	15.84	14.91	69.345	18.41

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	16.52	17.41	99.956	20.00
6	2437	19.78	20.75	213.910	23.30
11	2462	17.47	18.41	125.190	20.98

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	17.73	18.31	127.057	21.04
6	2437	20.07	20.84	222.964	23.48
11	2462	18.03	18.53	134.818	21.30

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	20.05	20.25	207.083	23.16
6	2437	22.03	22.13	322.893	25.09
9	2452	20.62	20.76	234.469	23.70

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013


4.6.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

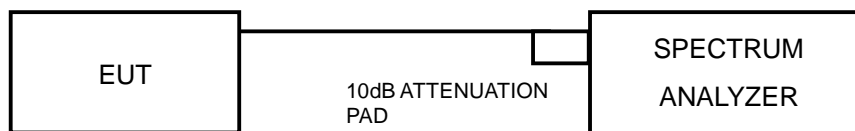

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.6.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-14.59	3.01	-11.58	7.68	PASS
	6	2437	-14.40	3.01	-11.39	7.68	PASS
	11	2462	-14.74	3.01	-11.73	7.68	PASS
1	1	2412	-15.93	3.01	-12.92	7.68	PASS
	6	2437	-15.94	3.01	-12.93	7.68	PASS
	11	2462	-15.83	3.01	-12.82	7.68	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.32-6) = 7.68\text{dBm}$.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-12.66	3.01	-9.65	7.68	PASS
	6	2437	-8.89	3.01	-5.88	7.68	PASS
	11	2462	-11.90	3.01	-8.89	7.68	PASS
1	1	2412	-12.11	3.01	-9.10	7.68	PASS
	6	2437	-8.49	3.01	-5.48	7.68	PASS
	11	2462	-11.07	3.01	-8.06	7.68	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.32-6) = 7.68\text{dBm}$.

802.11n (HT20)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-11.25	3.01	-8.24	7.68	PASS
	6	2437	-8.11	3.01	-5.10	7.68	PASS
	11	2462	-10.23	3.01	-7.22	7.68	PASS
1	1	2412	-10.95	3.01	-7.94	7.68	PASS
	6	2437	-8.96	3.01	-5.95	7.68	PASS
	11	2462	-10.91	3.01	-7.90	7.68	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.32-6) = 7.68\text{dBm}$.



A D T

802.11n (HT40)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-13.45	3.01	-10.44	7.68	PASS
	6	2437	-10.98	3.01	-7.97	7.68	PASS
	11	2462	-11.60	3.01	-8.59	7.68	PASS
1	1	2412	-13.92	3.01	-10.91	7.68	PASS
	6	2437	-12.02	3.01	-9.01	7.68	PASS
	11	2462	-14.00	3.01	-10.99	7.68	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.32 - 6) = 7.68\text{dBm}$.



A D T

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013

4.7.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



4.7.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.7.7 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T


802.11b:

Chain (0)


CH 1

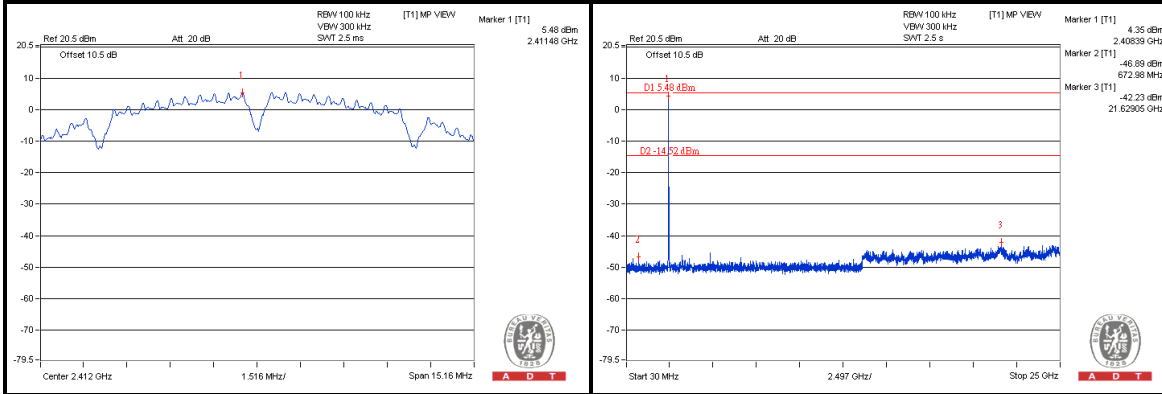

CH 6

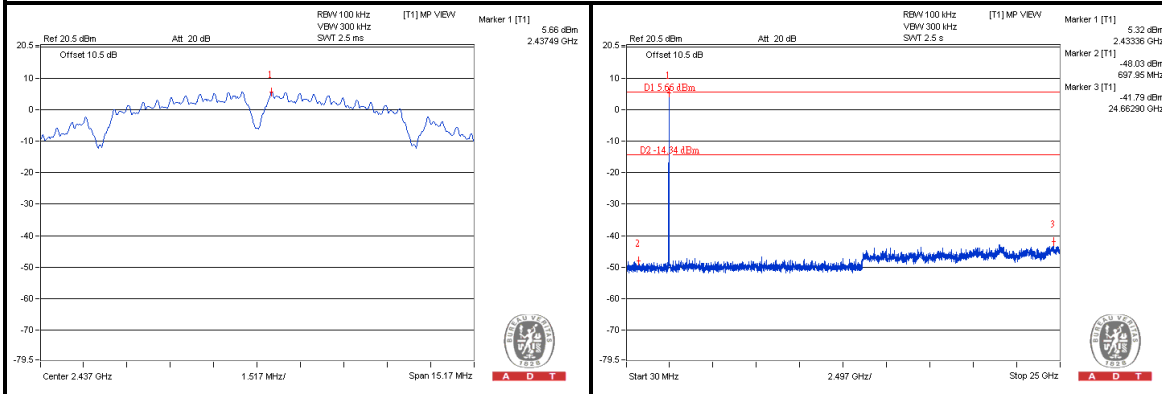

CH 11


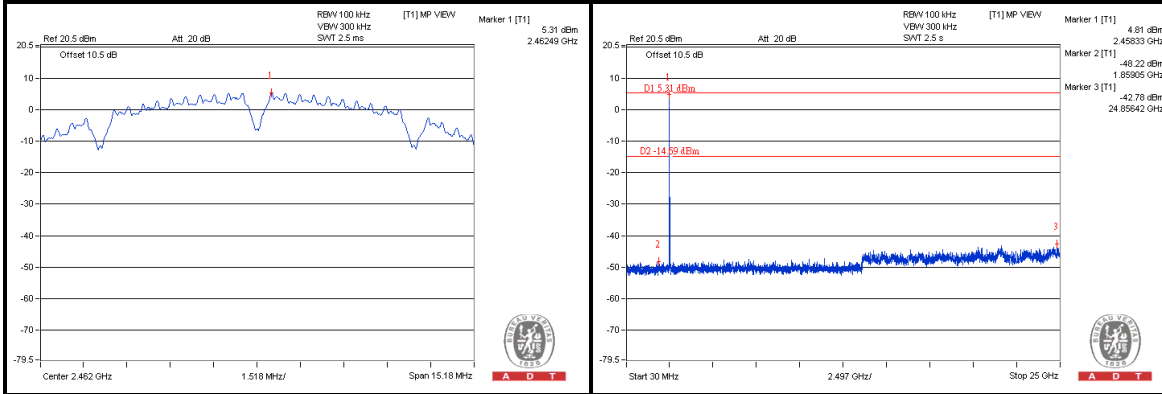






A D T

Chain (1)



CH 1

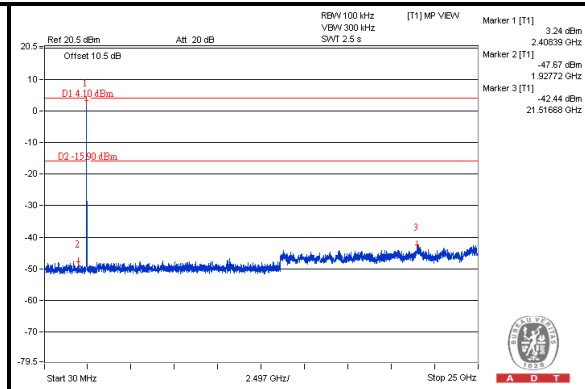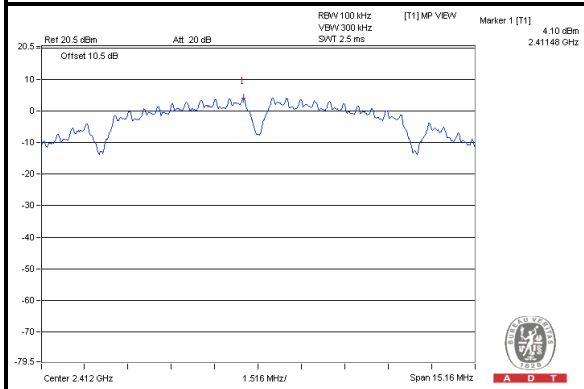

CH 6

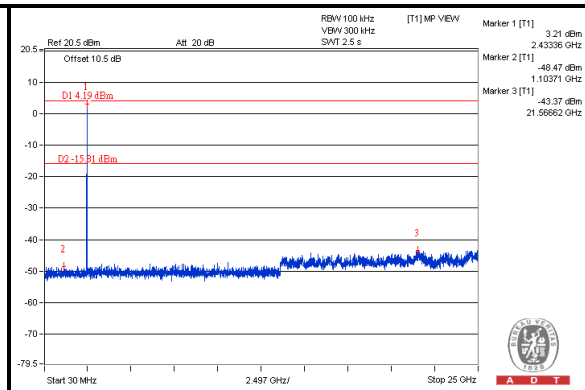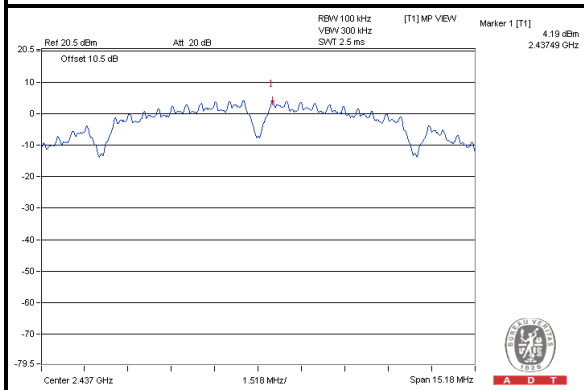

CH 11

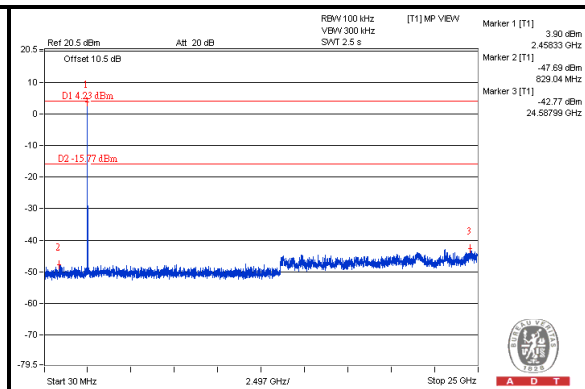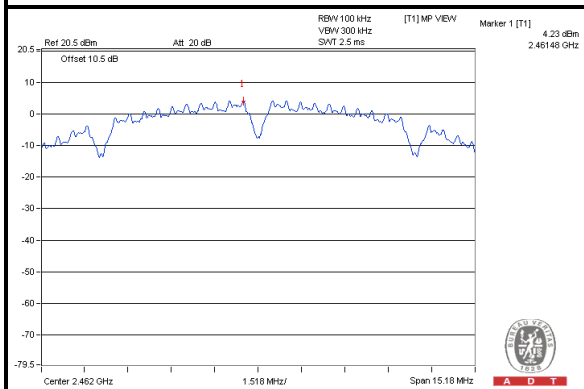





A D T



802.11g:

Chain (0)



CH 1

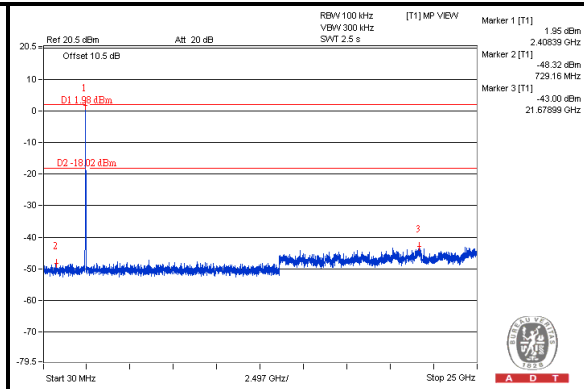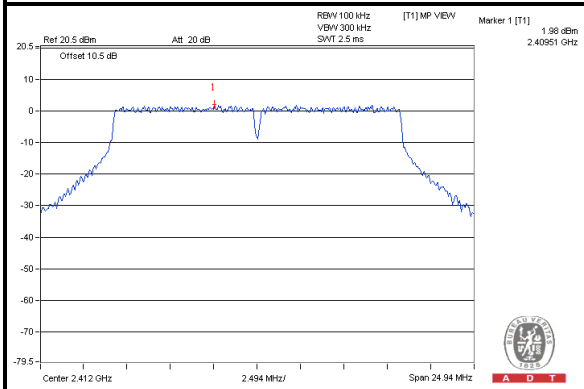

CH 6

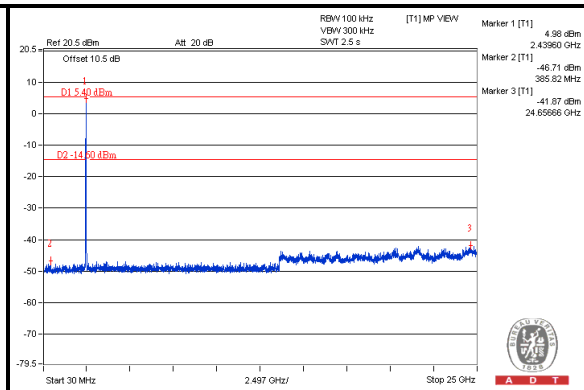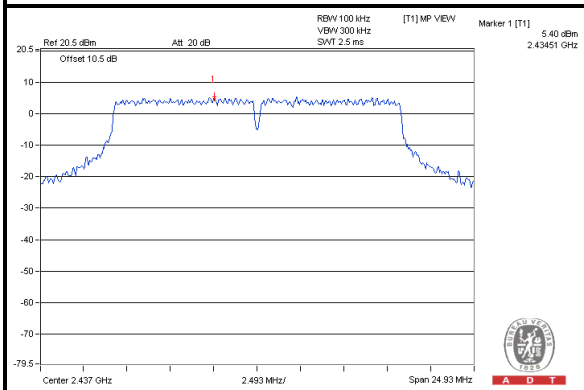

CH 11

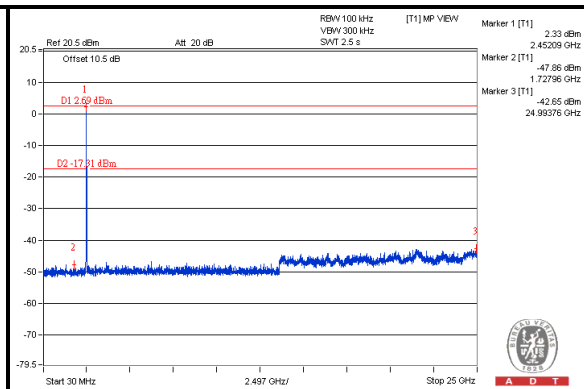
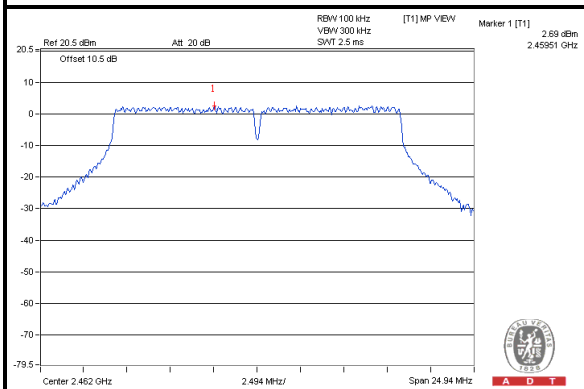






A D T

Chain (1)



CH 1

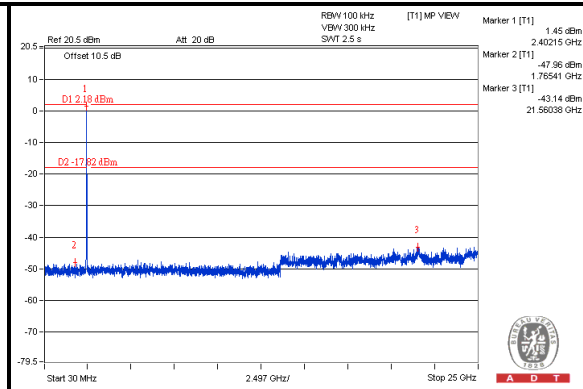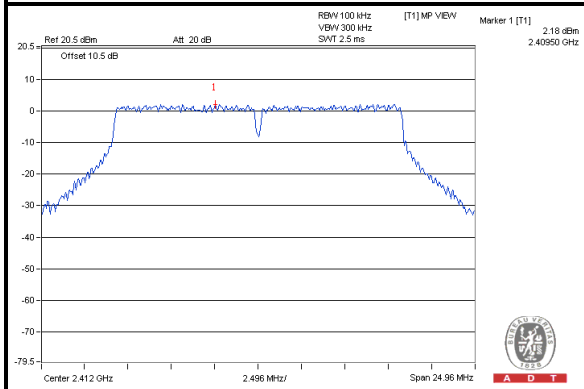

CH 6

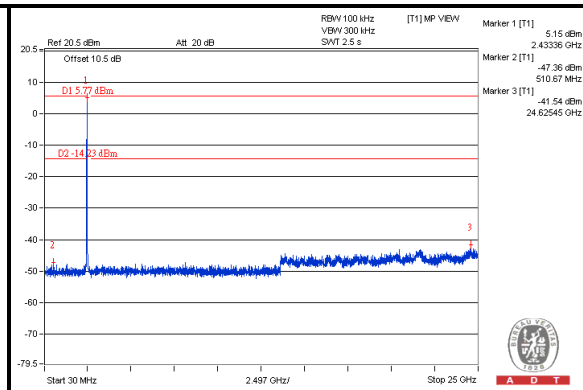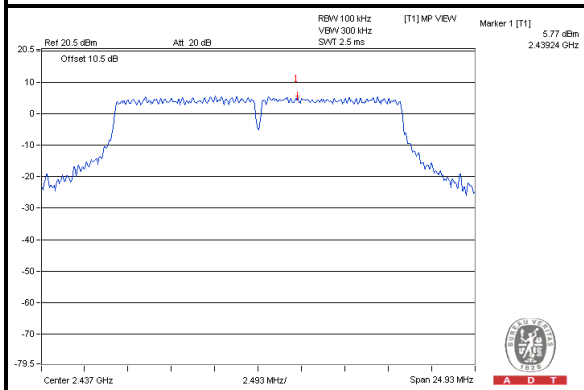

CH 11

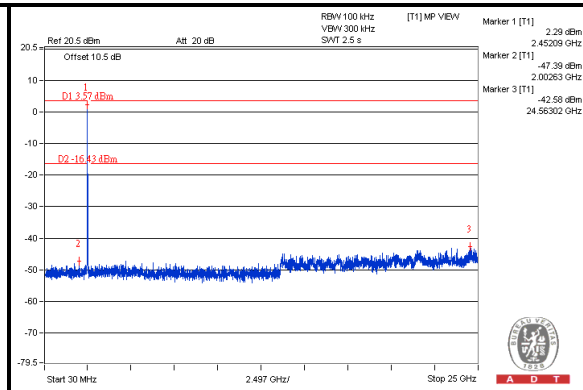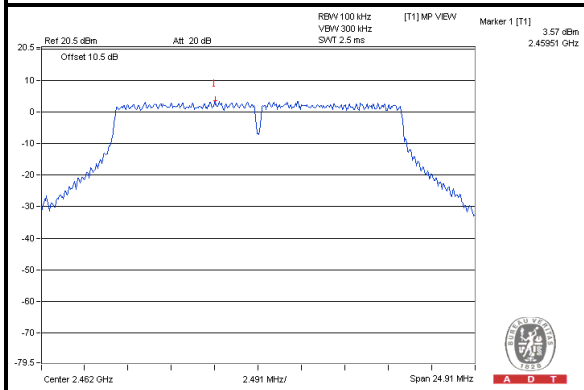





A D T



802.11n (HT20):

Chain (0)



CH 1

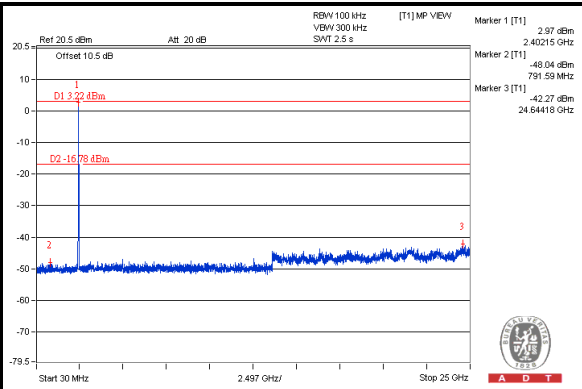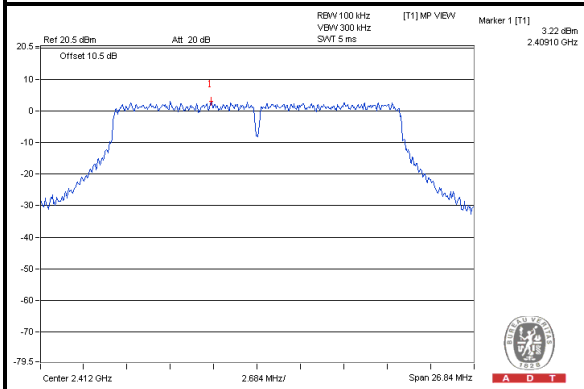

CH 6

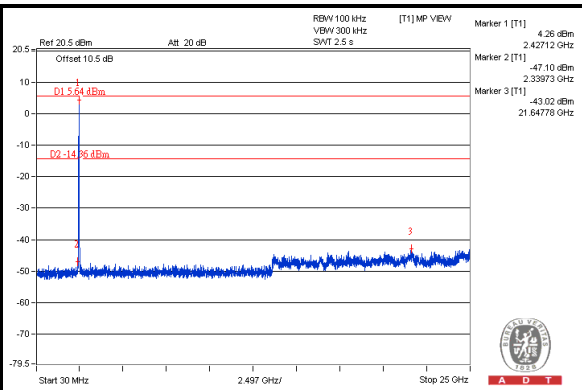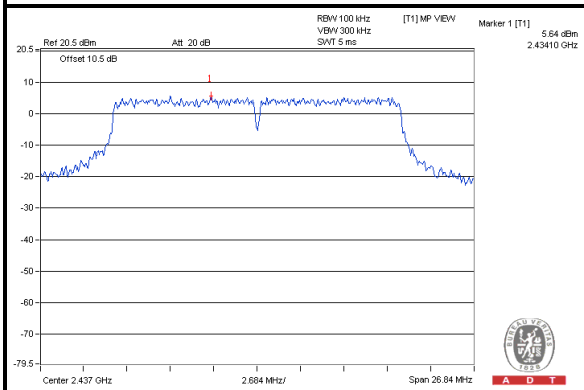

CH 11

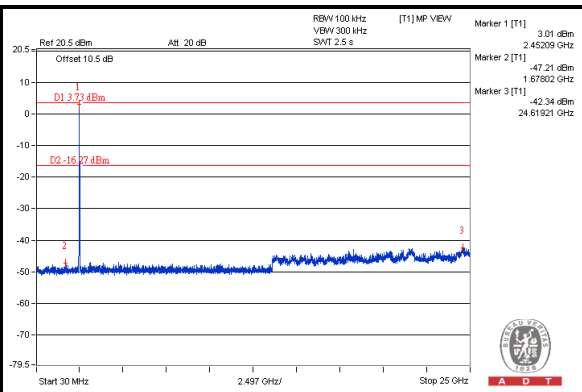
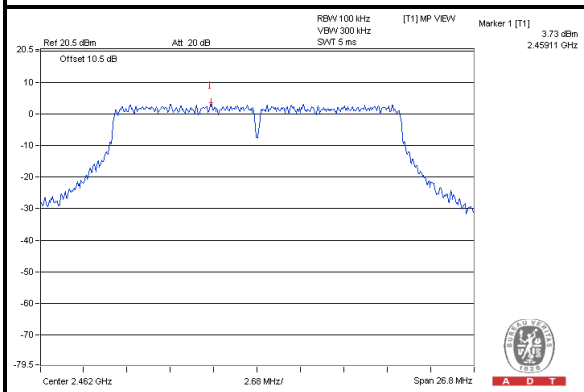






A D T

Chain (1)



CH 1

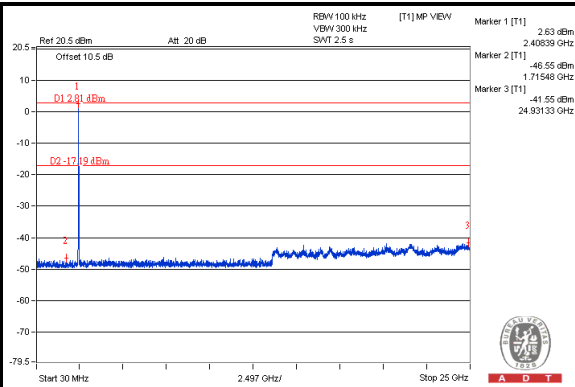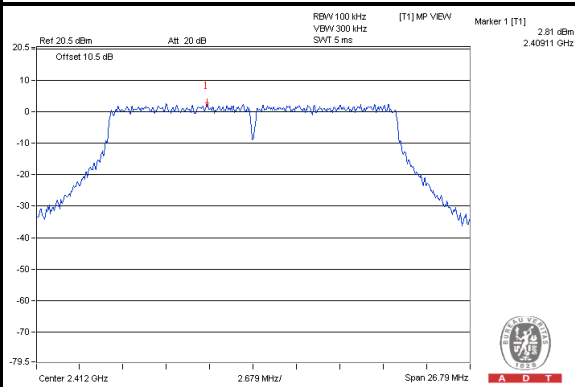

CH 6

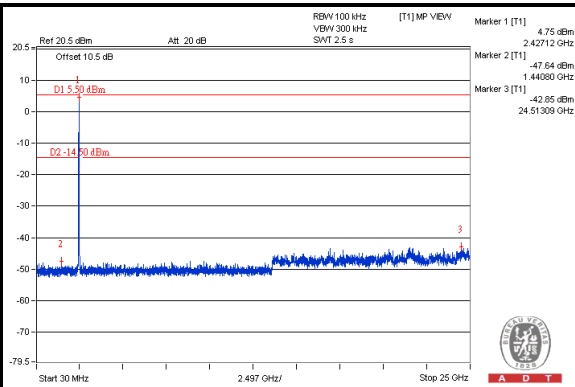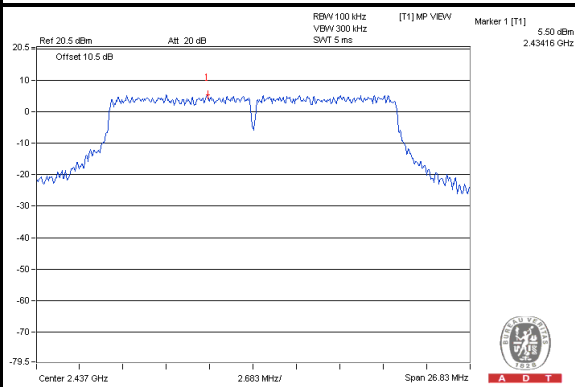

CH 11

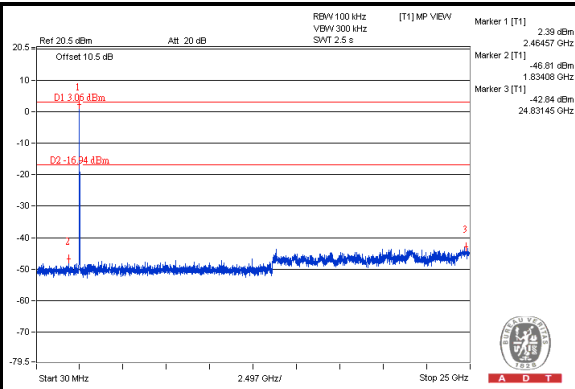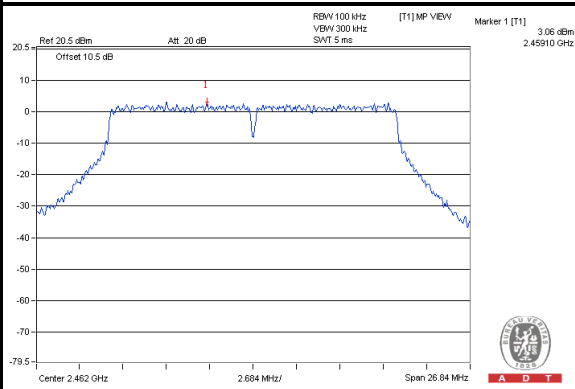





A D T



802.11n (HT40):

Chain (0)



CH 3

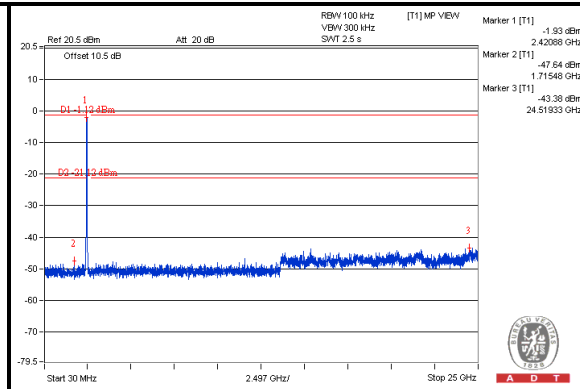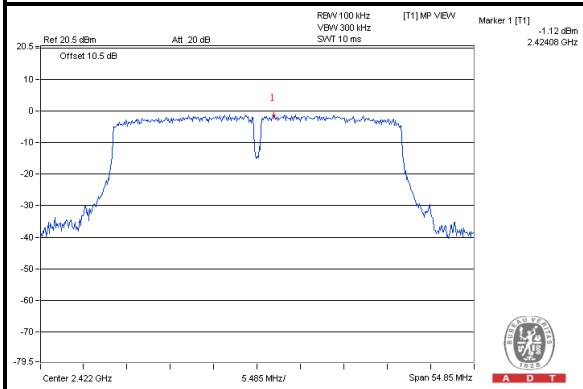

CH 6

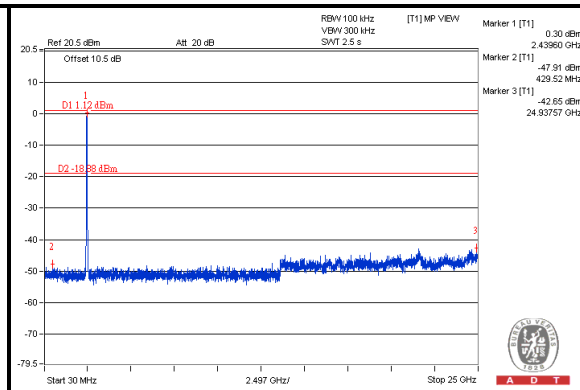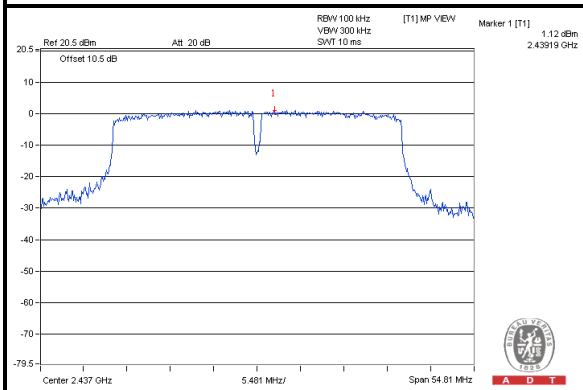

CH 9

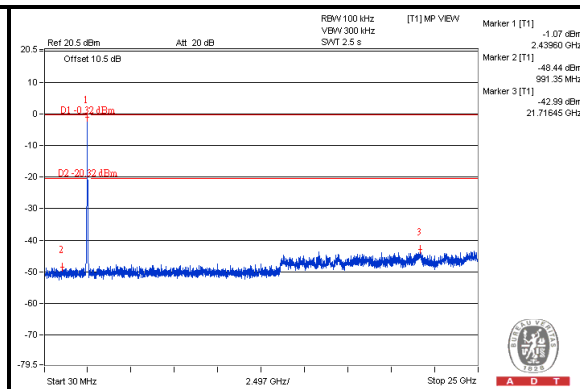
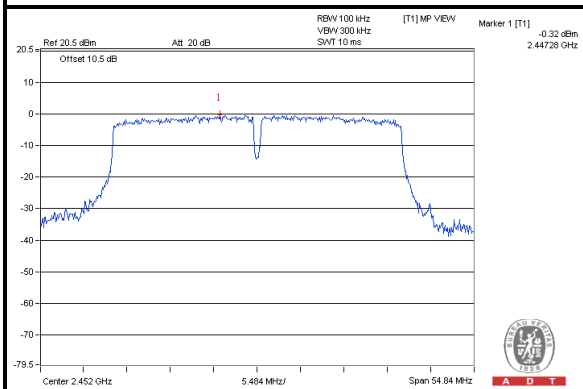






A D T

Chain (1)



CH 3

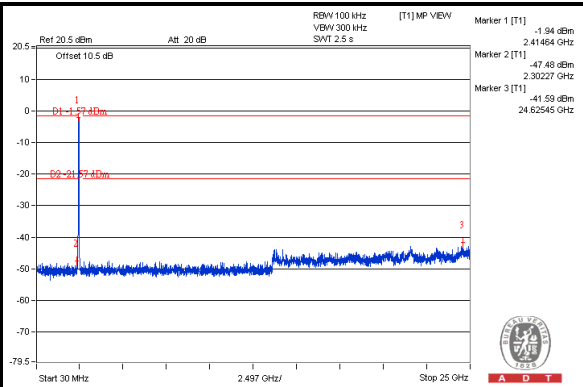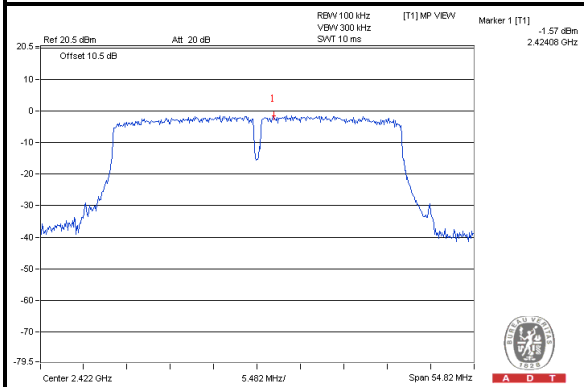

CH 6

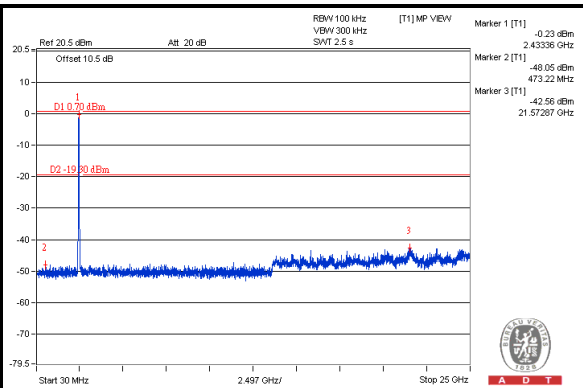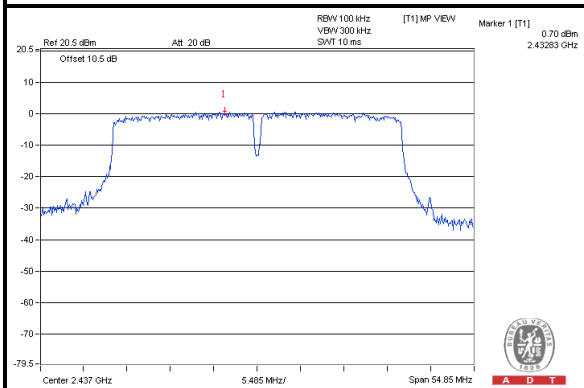

CH 9

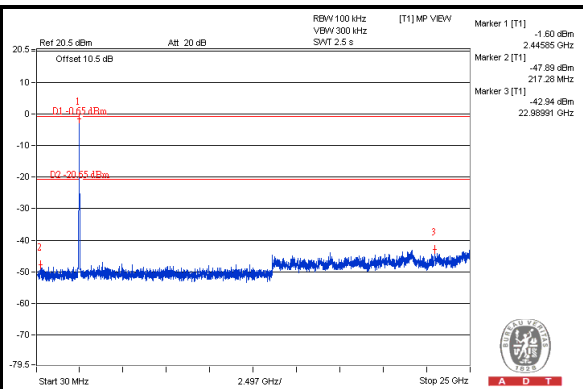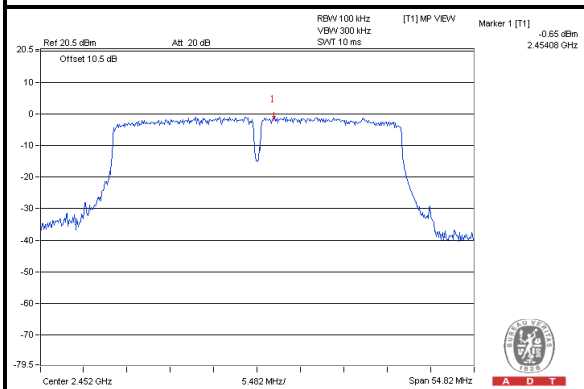



A D T

5. TEST TYPES AND RESULTS (FOR 5GHz, 5.725~5.850GHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 28, 2013	Feb. 27, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 24, 2012	Sep. 23, 2013
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	8487731004	Oct. 29, 2012	Oct. 28, 2013
RF Cable (JYBAO)	5DFB	COACAB-001	May 27, 2013	May 26, 2014
50 ohms Terminator	50	3	Oct. 16, 2012	Oct. 15, 2013
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Aug. 28, 2013

5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

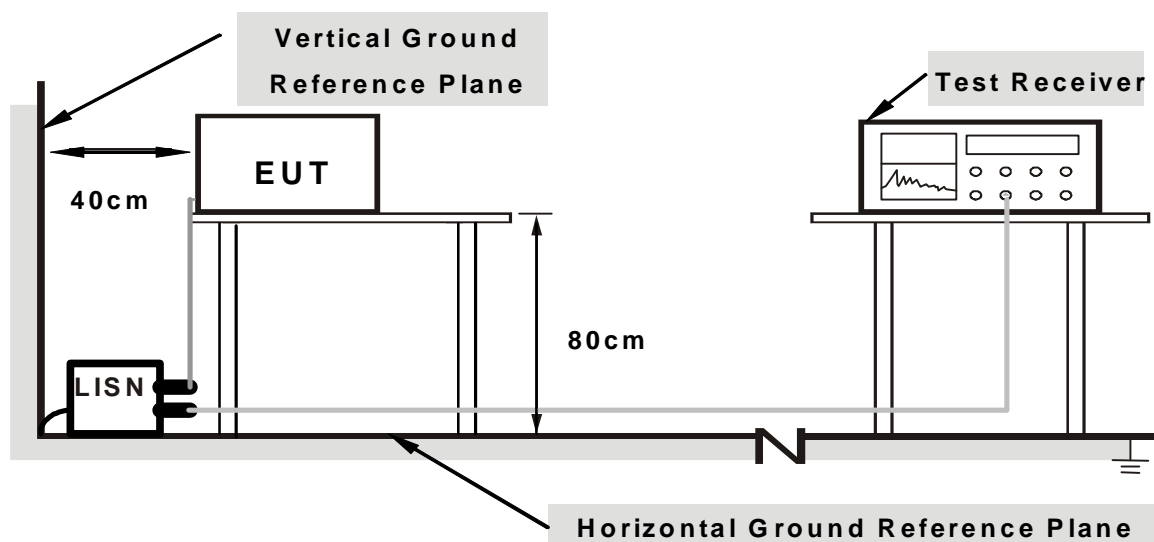

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as the 4.1.6


5.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	0.14	38.67	25.56	38.81	25.70	63.58	53.58	-24.77	-27.88
2	0.26328	0.16	34.89	20.09	35.05	20.25	61.33	51.33	-26.28	-31.08
3	0.48594	0.21	27.84	12.40	28.05	12.61	56.24	46.24	-28.19	-33.63
4	1.39453	0.28	25.13	12.62	25.41	12.90	56.00	46.00	-30.59	-33.10
5	2.40625	0.35	33.08	23.42	33.43	23.77	56.00	46.00	-22.57	-22.23
6	16.69922	1.27	31.74	23.43	33.01	24.70	60.00	50.00	-26.99	-25.30

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

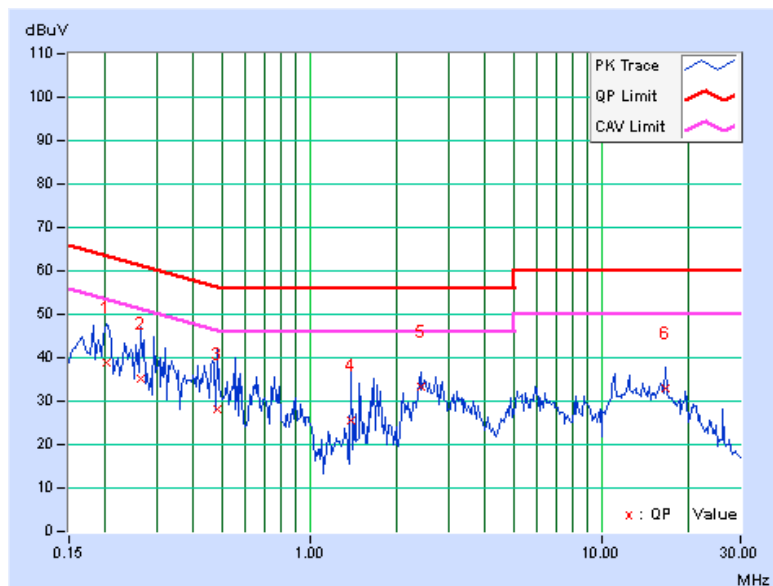


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.11	40.39	38.04	40.50	38.15	65.38	55.38	-24.87	-17.22
2	0.22812	0.13	35.57	17.48	35.70	17.61	62.52	52.52	-26.82	-34.91
3	0.27500	0.15	33.37	12.82	33.52	12.97	60.97	50.97	-27.45	-38.00
4	0.33750	0.17	31.74	14.63	31.91	14.80	59.26	49.26	-27.36	-34.47
5	0.46641	0.19	28.12	11.96	28.31	12.15	56.58	46.58	-28.26	-34.42
6	0.67734	0.20	23.13	11.03	23.33	11.23	56.00	46.00	-32.67	-34.77

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

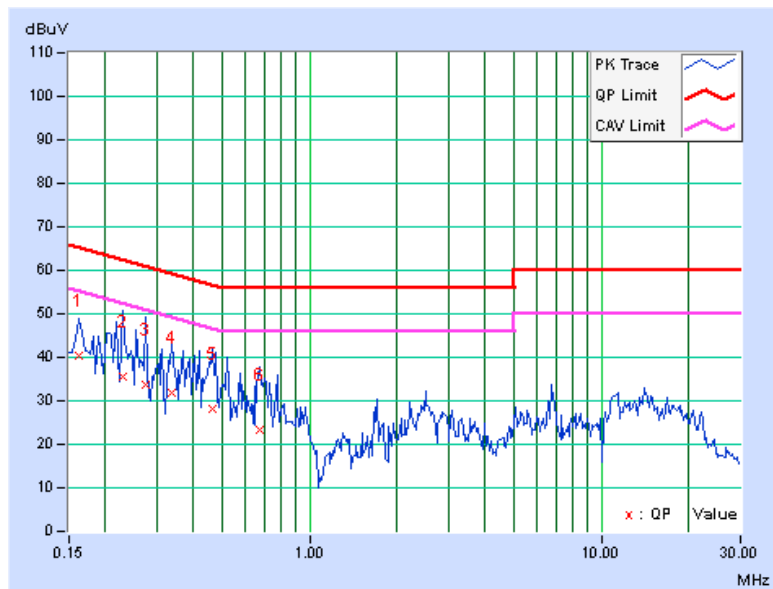



A D T


5.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.41563	0.20	41.69	32.46	41.89	32.66	57.54	47.54	-15.64	-14.87
2	0.47813	0.21	49.36	40.71	49.57	40.92	56.37	46.37	-6.80	-5.45
3	0.65781	0.22	38.50	29.14	38.72	29.36	56.00	46.00	-17.28	-16.64
4	0.97422	0.25	38.58	29.22	38.83	29.47	56.00	46.00	-17.17	-16.53
5	2.08594	0.33	37.92	28.44	38.25	28.77	56.00	46.00	-17.75	-17.23
6	2.86719	0.38	36.50	26.37	36.88	26.75	56.00	46.00	-19.12	-19.25

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

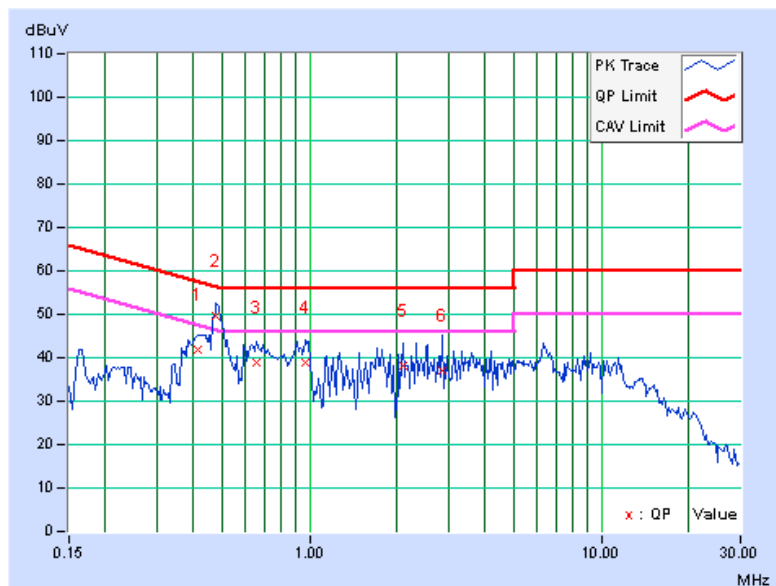


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.41172	0.19	35.94	30.31	36.13	30.50	57.61	47.61	-21.48	-17.11
2	0.48203	0.19	42.59	37.66	42.78	37.85	56.30	46.30	-13.52	-8.45
3	0.88438	0.21	31.01	21.20	31.22	21.41	56.00	46.00	-24.78	-24.59
4	2.53906	0.31	35.56	25.57	35.87	25.88	56.00	46.00	-20.13	-20.12
5	6.38281	0.52	36.10	26.03	36.62	26.55	60.00	50.00	-23.38	-23.45
6	11.35938	0.76	35.29	25.76	36.05	26.52	60.00	50.00	-23.95	-23.48

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

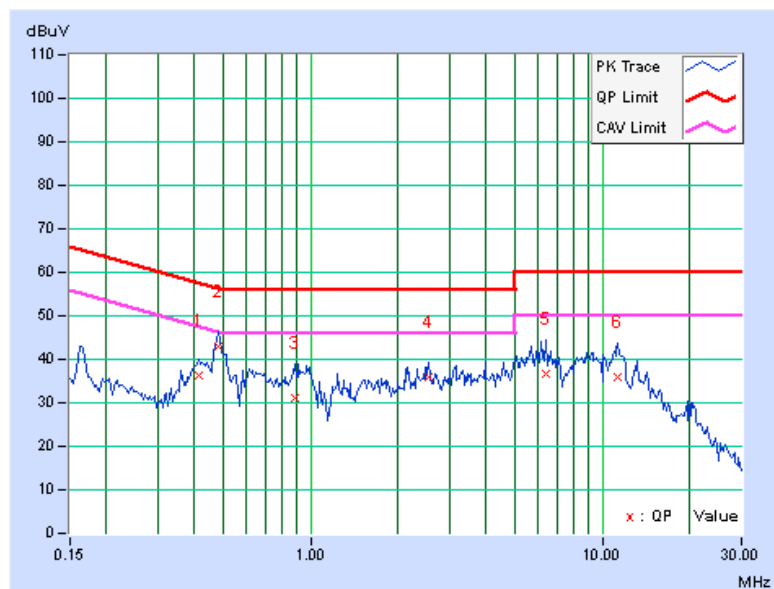



A D T

5.2 RADIATED AND BANDEGE EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED AND BANDEGE EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



5.2.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 30, 2012	Oct. 29, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Mar. 25, 2013	Mar. 24, 2014
Horn_Antenna AISI	AIH.8018	000022009111 0	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: Aug. 23, 2013



A D T

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 29, 2013	Jan. 28, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
Pre-Amplifier SPACEK LABS	SLKka-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Mar. 19, 2013	Mar. 18, 2014
Horn_Antenna AISL	AIH.8018	000032009111 0	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Aug. 23, 2013

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

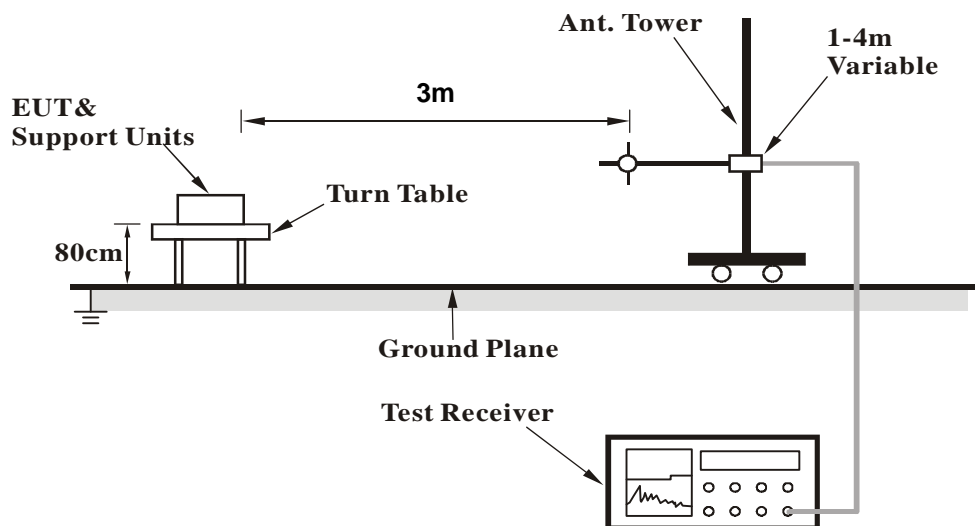

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6



5.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11ac (VHT80)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	147.47	32.2 QP	43.5	-11.3	2.00 H	77	45.64	-13.42
2	177.52	33.1 QP	43.5	-10.4	1.50 H	104	47.65	-14.54
3	321.18	27.6 QP	46.0	-18.4	1.00 H	323	38.87	-11.29
4	335.36	27.7 QP	46.0	-18.3	1.00 H	134	38.85	-11.14
5	387.39	30.5 QP	46.0	-15.5	1.00 H	322	40.61	-10.11
6	722.87	30.3 QP	46.0	-15.7	1.00 H	247	34.13	-3.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.74	32.1 QP	40.0	-7.9	1.00 V	2	45.61	-13.47
2	106.66	27.2 QP	43.5	-16.3	1.00 V	232	43.77	-16.58
3	184.35	32.6 QP	43.5	-11.0	1.00 V	74	48.02	-15.47
4	335.51	27.9 QP	46.0	-18.1	1.00 V	2	39.05	-11.14
5	439.41	27.8 QP	46.0	-18.2	2.00 V	201	36.32	-8.49
6	529.22	30.0 QP	46.0	-16.0	1.00 V	81	37.08	-7.12

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.4 PK	74.0	-19.6	1.01 H	118	44.75	9.65
2	5460.00	41.5 AV	54.0	-12.5	1.01 H	118	31.85	9.65
3	*5745.00	99.8 PK			1.11 H	230	89.38	10.42
4	*5745.00	90.9 AV			1.11 H	230	80.48	10.42
5	11490.00	54.2 PK	74.0	-19.8	1.28 H	60	36.94	17.26
6	11490.00	43.4 AV	54.0	-10.6	1.28 H	60	26.14	17.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.1 PK	74.0	-19.9	1.00 V	109	44.45	9.65
2	5460.00	41.3 AV	54.0	-12.7	1.00 V	109	31.65	9.65
3	*5745.00	110.0 PK			1.10 V	109	99.58	10.42
4	*5745.00	101.2 AV			1.10 V	109	90.78	10.42
5	11490.00	59.7 PK	74.0	-14.3	1.39 V	56	42.44	17.26
6	11490.00	47.4 AV	54.0	-6.6	1.39 V	56	30.14	17.26

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.2 PK	74.0	-19.8	1.16 H	236	44.55	9.65
2	5460.00	41.2 AV	54.0	-12.8	1.16 H	236	31.55	9.65
3	*5785.00	99.6 PK			1.16 H	236	89.11	10.49
4	*5785.00	90.6 AV			1.16 H	236	80.11	10.49
5	11570.00	53.7 PK	74.0	-20.3	1.28 H	76	36.41	17.29
6	11570.00	42.9 AV	54.0	-11.1	1.28 H	76	25.61	17.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	1.06 V	111	44.95	9.65
2	5460.00	41.5 AV	54.0	-12.5	1.06 V	111	31.85	9.65
3	*5785.00	109.4 PK			1.06 V	111	98.91	10.49
4	*5785.00	100.8 AV			1.06 V	111	90.31	10.49
5	11570.00	59.7 PK	74.0	-14.3	1.43 V	55	42.41	17.29
6	11570.00	47.4 AV	54.0	-6.6	1.43 V	55	30.11	17.29

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	53.8 PK	74.0	-20.2	1.08 H	217	44.15	9.65
2	5460.00	41.2 AV	54.0	-12.8	1.08 H	217	31.55	9.65
3	*5825.00	100.3 PK			1.08 H	217	89.65	10.65
4	*5825.00	91.2 AV			1.08 H	217	80.55	10.65
5	11650.00	54.3 PK	74.0	-19.7	1.27 H	72	36.64	17.66
6	11650.00	43.3 AV	54.0	-10.7	1.27 H	72	25.64	17.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.1 PK	74.0	-19.9	1.05 V	95	44.45	9.65
2	5460.00	41.3 AV	54.0	-12.7	1.05 V	95	31.65	9.65
3	*5825.00	110.2 PK			1.05 V	95	99.55	10.65
4	*5825.00	101.3 AV			1.05 V	95	90.65	10.65
5	11650.00	59.9 PK	74.0	-14.1	1.36 V	47	42.24	17.66
6	11650.00	47.3 AV	54.0	-6.7	1.36 V	47	29.64	17.66

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

802.11n (HT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	55.1 PK	74.0	-18.9	1.07 H	235	45.45	9.65
2	5460.00	41.9 AV	54.0	-12.1	1.07 H	235	32.25	9.65
3	*5745.00	99.7 PK			1.07 H	235	89.28	10.42
4	*5745.00	90.9 AV			1.07 H	235	80.48	10.42
5	11490.00	54.2 PK	74.0	-19.8	1.24 H	56	36.94	17.26
6	11490.00	43.3 AV	54.0	-10.7	1.24 H	56	26.04	17.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.5 PK	74.0	-19.5	1.12 V	122	44.85	9.65
2	5460.00	41.6 AV	54.0	-12.4	1.12 V	122	31.95	9.65
3	*5745.00	109.6 PK			1.12 V	122	99.18	10.42
4	*5745.00	101.2 AV			1.12 V	122	90.78	10.42
5	11490.00	59.5 PK	74.0	-14.5	1.35 V	65	42.24	17.26
6	11490.00	46.9 AV	54.0	-7.1	1.35 V	65	29.64	17.26

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.1 PK	74.0	-19.9	1.15 H	241	44.45	9.65
2	5460.00	41.4 AV	54.0	-12.6	1.15 H	241	31.75	9.65
3	*5785.00	99.7 PK			1.15 H	241	89.21	10.49
4	*5785.00	90.8 AV			1.15 H	241	80.31	10.49
5	11570.00	54.1 PK	74.0	-19.9	1.26 H	65	36.81	17.29
6	11570.00	43.5 AV	54.0	-10.5	1.26 H	65	26.21	17.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	53.5 PK	74.0	-20.5	1.00 V	97	43.85	9.65
2	5460.00	41.1 AV	54.0	-12.9	1.00 V	97	31.45	9.65
3	*5785.00	109.7 PK			1.01 V	102	99.21	10.49
4	*5785.00	101.2 AV			1.01 V	102	90.71	10.49
5	11570.00	59.6 PK	74.0	-14.4	1.36 V	20	42.31	17.29
6	11570.00	47.3 AV	54.0	-6.7	1.36 V	20	30.01	17.29

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.2 PK	74.0	-19.8	1.10 H	218	44.55	9.65
2	5460.00	41.1 AV	54.0	-12.9	1.10 H	218	31.45	9.65
3	*5825.00	99.8 PK			1.10 H	218	89.15	10.65
4	*5825.00	90.9 AV			1.10 H	218	80.25	10.65
5	11650.00	53.7 PK	74.0	-20.3	1.33 H	73	36.04	17.66
6	11650.00	43.2 AV	54.0	-10.8	1.33 H	73	25.54	17.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	53.3 PK	74.0	-20.7	1.01 V	95	43.65	9.65
2	5460.00	40.6 AV	54.0	-13.4	1.01 V	95	30.95	9.65
3	*5825.00	109.6 PK			1.01 V	95	98.95	10.65
4	*5825.00	101.3 AV			1.01 V	95	90.65	10.65
5	11650.00	59.7 PK	74.0	-14.3	1.41 V	44	42.04	17.66
6	11650.00	47.6 AV	54.0	-6.4	1.41 V	44	29.94	17.66

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

802.11n (HT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	1.08 H	222	44.95	9.65
2	5460.00	41.6 AV	54.0	-12.4	1.08 H	222	31.95	9.65
3	*5755.00	99.8 PK			1.08 H	222	89.37	10.43
4	*5755.00	90.8 AV			1.08 H	222	80.37	10.43
5	11510.00	54.0 PK	74.0	-20.0	1.31 H	65	36.77	17.23
6	11510.00	43.3 AV	54.0	-10.7	1.31 H	65	26.07	17.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	52.8 PK	74.0	-21.2	1.10 V	110	43.15	9.65
2	5460.00	40.5 AV	54.0	-13.5	1.10 V	110	30.85	9.65
3	*5755.00	106.7 PK			1.10 V	110	96.27	10.43
4	*5755.00	98.0 AV			1.10 V	110	87.57	10.43
5	11510.00	59.9 PK	74.0	-14.1	1.37 V	30	42.67	17.23
6	11510.00	47.5 AV	54.0	-6.5	1.37 V	30	30.27	17.23

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.2 PK	74.0	-19.8	1.12 H	225	44.55	9.65
2	5460.00	41.5 AV	54.0	-12.5	1.12 H	225	31.85	9.65
3	*5795.00	99.9 PK			1.12 H	225	89.40	10.50
4	*5795.00	91.1 AV			1.12 H	225	80.60	10.50
5	11590.00	54.4 PK	74.0	-19.6	1.30 H	72	37.09	17.31
6	11590.00	43.6 AV	54.0	-10.4	1.30 H	72	26.29	17.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	53.2 PK	74.0	-20.8	1.14 V	112	43.55	9.65
2	5460.00	40.8 AV	54.0	-13.2	1.14 V	112	31.15	9.65
3	*5795.00	106.0 PK			1.14 V	112	95.50	10.50
4	*5795.00	97.7 AV			1.14 V	112	87.20	10.50
5	11590.00	59.8 PK	74.0	-14.2	1.43 V	19	42.49	17.31
6	11590.00	47.6 AV	54.0	-6.4	1.43 V	19	30.29	17.31

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

802.11ac (VHT80)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	1.00 H	97	44.95	9.65
2	5460.00	41.4 AV	54.0	-12.6	1.00 H	97	31.75	9.65
3	*5775.00	94.1 PK			1.00 H	97	83.63	10.47
4	*5775.00	85.2 AV			1.00 H	97	74.73	10.47
5	11550.00	54.5 PK	74.0	-19.5	1.28 H	72	37.23	17.27
6	11550.00	43.7 AV	54.0	-10.3	1.28 H	72	26.43	17.27
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.0 PK	74.0	-20.0	1.09 V	110	44.35	9.65
2	5460.00	41.5 AV	54.0	-12.5	1.09 V	110	31.85	9.65
3	*5775.00	104.2 PK			1.09 V	110	93.73	10.47
4	*5775.00	95.0 AV			1.09 V	110	84.53	10.47
5	11550.00	58.9 PK	74.0	-15.1	1.40 V	68	41.63	17.27
6	11550.00	47.3 AV	54.0	-6.7	1.40 V	68	30.03	17.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013


5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

5.3.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	16.56	0.5	PASS
157	5785	16.57	0.5	PASS
165	5825	16.56	0.5	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	17.87	0.5	PASS
157	5785	17.81	0.5	PASS
165	5825	17.87	0.5	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
151	5755	36.59	0.5	PASS
159	5795	36.60	0.5	PASS

802.11ac (VHT80)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
155	5775	76.62	0.5	PASS



A D T

5.4 CONDUCTED OUTPUT POWER MEASUREMENT

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz band: 1 Watt (30dBm)

5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	1014008	Apr. 23, 2013	Apr. 22, 2014
Power Sensor	MA2411B	0917122	Apr. 23, 2013	Apr. 22, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013


5.4.3 TEST PROCEDURES

The peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

5.4.5 TEST SETUP

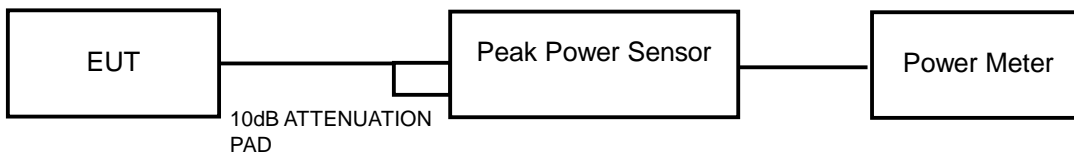

5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



A D T

5.4.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	257.632	24.11	30	PASS
157	5785	252.930	24.03	30	PASS
165	5825	233.884	23.69	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	253.513	24.04	30	PASS
157	5785	246.037	23.91	30	PASS
165	5825	225.944	23.54	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
151	5755	226.464	23.55	30	PASS
159	5795	231.739	23.65	30	PASS

802.11ac (VHT80)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
155	5775	381.944	25.82	30	PASS

5.5 AVERAGE OUTPUT POWER

5.5.1 FOR REFERENCE.

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	1014008	Apr. 23, 2013	Apr. 22, 2014
Power Sensor	MA2411B	0917122	Apr. 23, 2013	Apr. 22, 2014


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013

5.5.3 TEST PROCEDURES

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

5.5.4 TEST SETUP

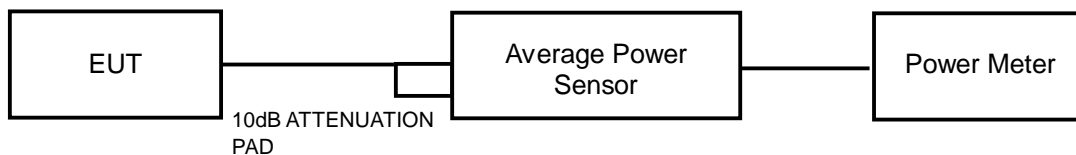

5.5.5 EUT OPERATING CONDITIONS

Same as Item 5.3.6



A D T

5.5.6 TEST RESULTS

802.11a

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
149	5745	112.720	20.52
157	5785	105.925	20.25
165	5825	90.91	19.59

802.11n (HT20)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
149	5745	111.429	20.47
157	5785	101.158	20.05
165	5825	88.512	19.47

802.11n (HT40)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
151	5755	94.842	19.77
159	5795	96.161	19.83

802.11ac (VHT80)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
155	5775	30.903	14.90

5.6 POWER SPECTRAL DENSITY MEASUREMENT

5.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013


5.6.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 TEST SETUP



5.6.6 EUT OPERATING CONDITION

Same as Item 5.3.6



A D T

5.6.7 TEST RESULTS

802.11a

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	-9.13	8	PASS
157	5785	-9.18	8	PASS
165	5825	-9.48	8	PASS

802.11n (HT20)

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	-9.08	8	PASS
157	5785	-8.44	8	PASS
165	5825	-9.58	8	PASS

802.11n (HT40)

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
151	5755	-10.99	8	PASS
159	5795	-11.73	8	PASS

802.11ac (VHT80)

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
155	5775	-13.85	8	PASS

5.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.7.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 22, 2013

5.7.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

5.7.4 DEVIATION FROM TEST STANDARD

No deviation

5.7.5 TEST SETUP



5.7.6 EUT OPERATING CONDITION

Same as Item 5.3.6

5.7.7 TEST RESULTS



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

802.11a



CH 149

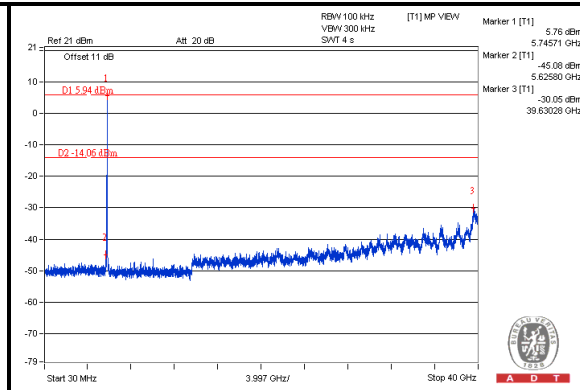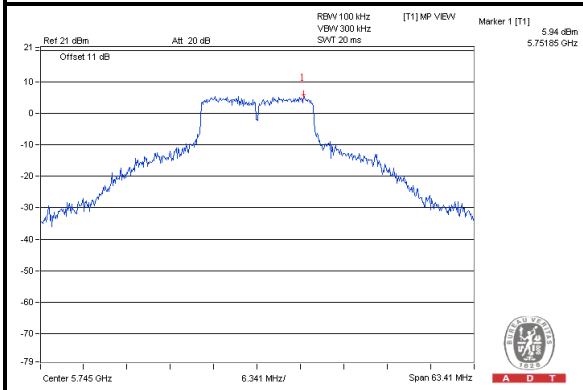

CH 157

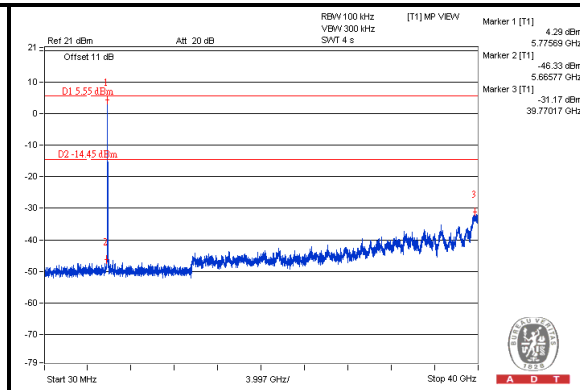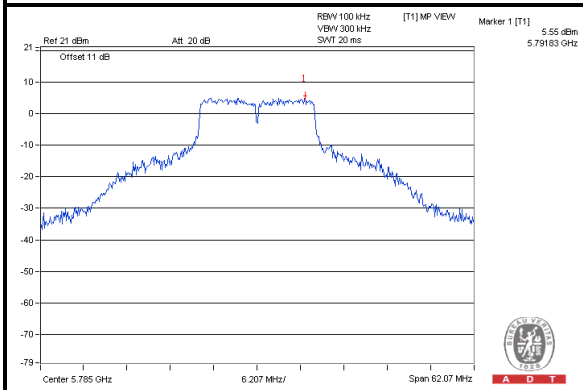

CH 165

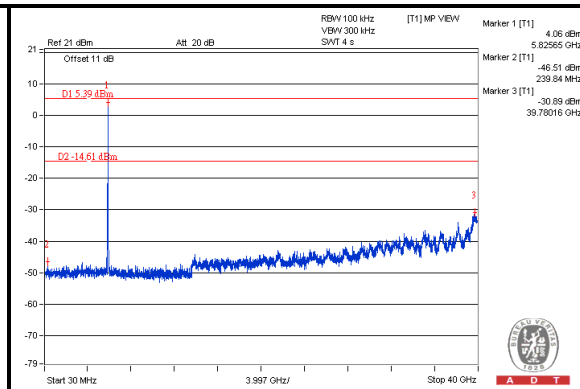
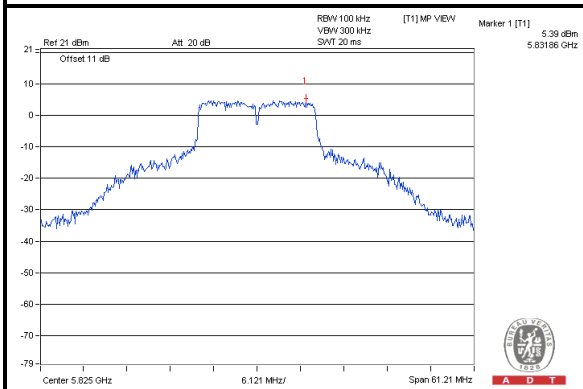






A D T

802.11n (HT20):



CH 149

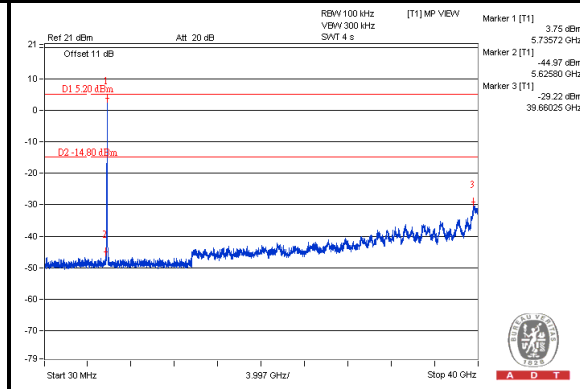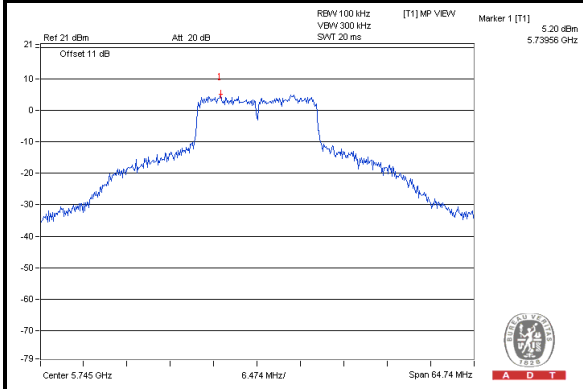

CH 157

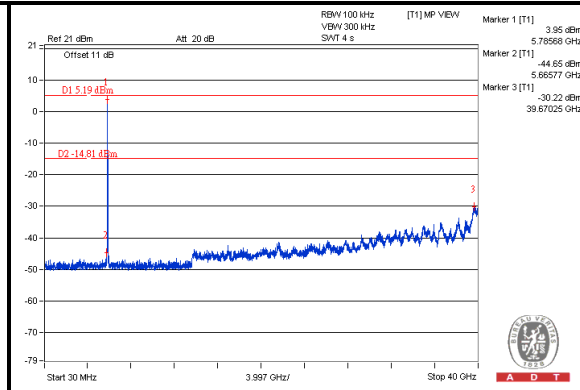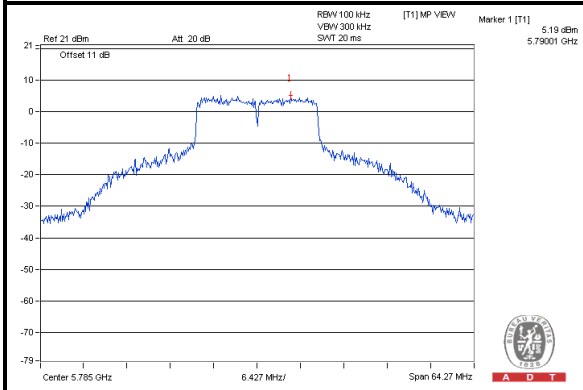

CH 165

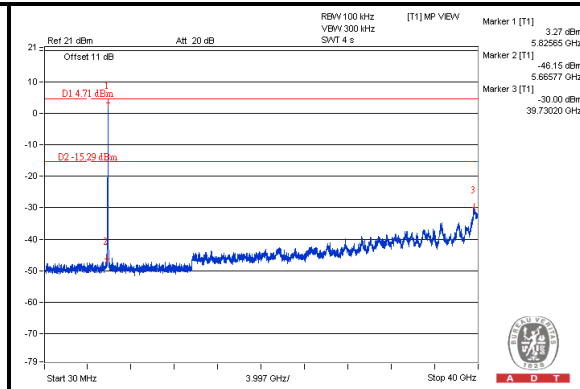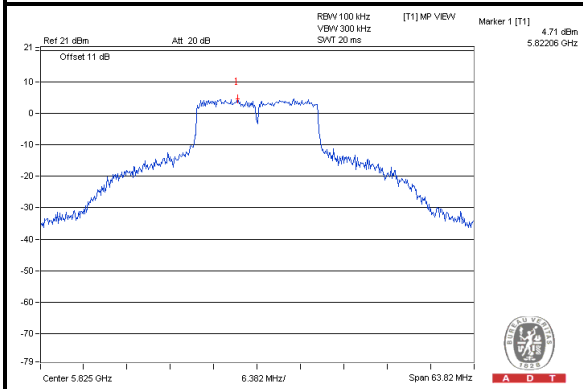





A D T

802.11n (HT40):

CH 151

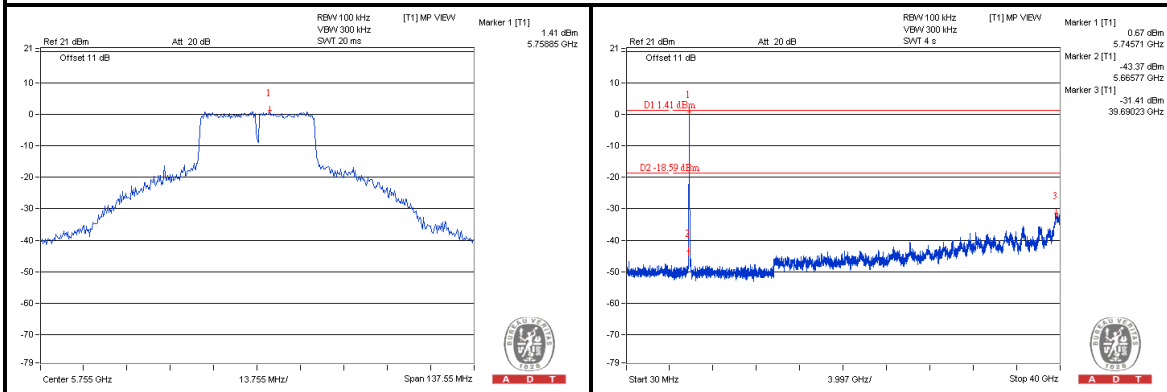


CH 159

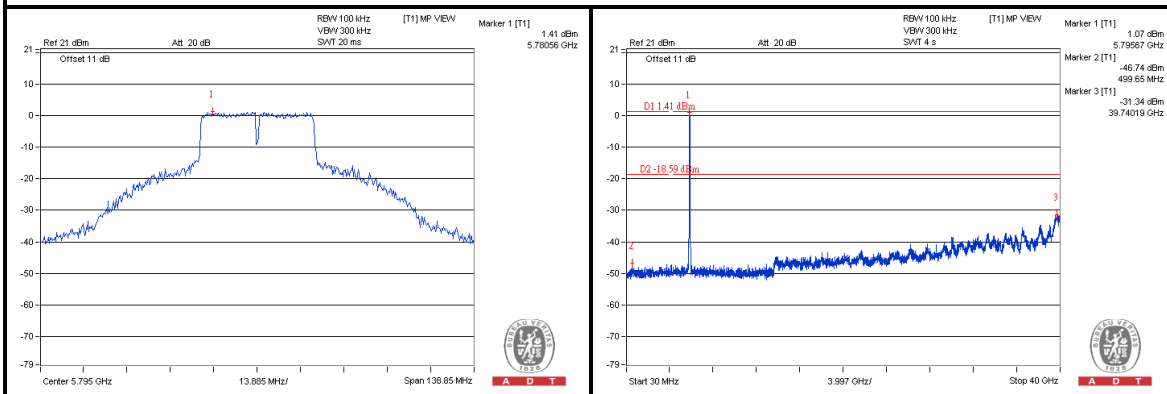

802.11ac (VHT80):

CH 155

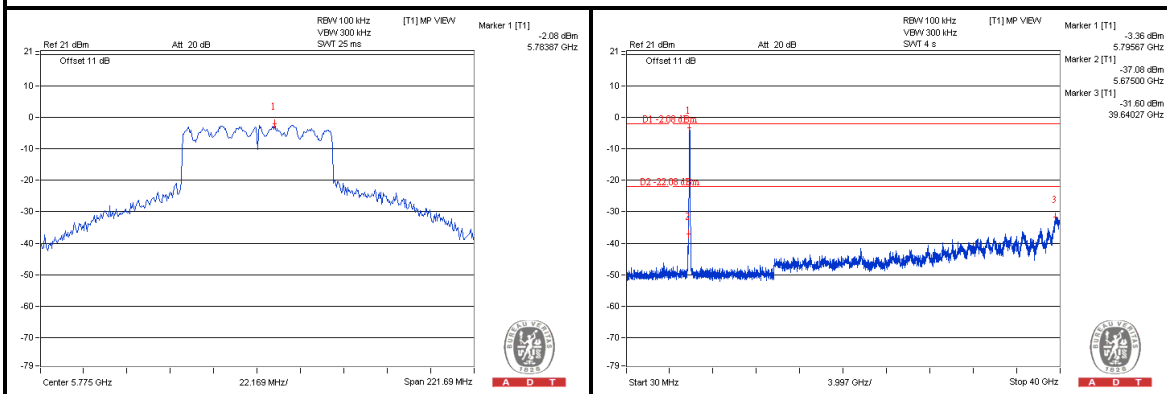



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---