



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2IR817LWA1

Product Name	Wireless AC750 Dual Band Cloud Router
Brand Name	D-Link
Model No.	DIR-817LW, DIR-817L
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Nov. 23, 2013
Final Test Date	Dec. 20, 2013
Submission Type	Original Equipment

### Statement

**Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a/ac (5725 ~ 5850MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01 and KDB 662911 D01 v02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	10
3.7. Table for Multiple Listing.....	10
3.8. Table for Supporting Units .....	10
3.9. Table for Parameters of Test Software Setting .....	11
3.10. EUT Operation during Test .....	12
3.11. Duty Cycle.....	13
3.12. Test Configurations .....	17
<b>4. TEST RESULT .....</b>	<b>19</b>
4.1. AC Power Line Conducted Emissions Measurement.....	19
4.2. Maximum Conducted Output Power Measurement.....	23
4.3. Power Spectral Density Measurement .....	26
4.4. 6dB Spectrum Bandwidth Measurement .....	36
4.5. Radiated Emissions Measurement .....	45
4.6. Emissions Measurement .....	73
4.7. Antenna Requirements .....	102
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>103</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>105</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A5</b>
<b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>B1 ~ B3</b>
<b>APPENDIX C. CO-LOCATION REPORT.....</b>	<b>C1 ~ C3</b>




## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3D2019AA	Rev. 01	Initial issue of report	Jan. 14, 2014

## 1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless AC750 Dual Band Cloud Router  
Brand Name : D-Link  
Model No. : DIR-817LW, DIR-817L  
Applicant : D-Link Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 23, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

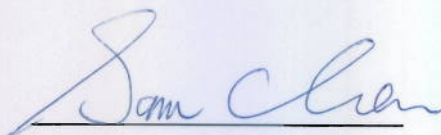

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.98 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	5.46 dB
4.3	15.247(e)	Power Spectral Density	Complies	12.97 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.11 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.10 dB
4.7	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	For 2.4GHz Band: WLAN (2TX, 2RX) For 5GHz Band: WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For 2.4GHz Band:</u> MCS0 (20MHz): 18.96 MHz ; MCS0 (40MHz): 36.16 MHz <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (20MHz): 33.28 MHz ; 802.11ac MCS0/Nss1 (40MHz): 63.04 MHz ; 802.11ac MCS0/Nss1 (80MHz): 88.00 MHz
Maximum Conducted Output Power	<u>For 2.4GHz Band:</u> MCS0 (20MHz): 24.54 dBm ; MCS0 (40MHz): 21.09 dBm <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (20MHz): 21.91 dBm ; 802.11ac MCS0/Nss1 (40MHz): 20.79 dBm ; 802.11ac MCS0/Nss1 (80MHz): 16.75 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**802.11a/b/g**

Items	Description
Product Type	802.11b/g: WLAN (2TX, 2RX) 802.11a: WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 15.12 MHz ; 11g: 16.64 MHz ; 11a: 32.00MHz
Maximum Conducted Output Power	11b: 19.63 dBm ; 11g: 24.50 dBm ; 11a: 21.96 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna and Band width**

Antenna	Single (TX)			Two (TX)	
	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz
IEEE 802.11a	V	X	X	X	X
IEEE 802.11b	X	X	X	V	X
IEEE 802.11g	X	X	X	V	X
IEEE 802.11n (2.4GHz)	X	X	X	V	V
IEEE 802.11n (5GHz)	V	V	X	X	X
IEEE 802.11ac	V	V	V	X	X

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
2.4GHz - 802.11n (HT20)	2	MCS0-15
2.4GHz - 802.11n (HT40)	2	MCS0-15
5GHz - 802.11n (HT20)	1	MCS0-7
5GHz - 802.11n (HT40)	1	MCS0-7
802.11ac (VHT20)	1	MCS 0-9/Nss1
802.11ac (VHT40)	1	MCS 0-9/Nss1
802.11ac (VHT80)	1	MCS 0-9/Nss1

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 (VHT: Very High Throughput). Then

EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

Power	Brand Holder	Model	Rating
Adapter 1	GLOBAL YEOU DIANN ELECTRIC INDUSTRIAL CO., LTD.	AMS9-1201000FU2	Input:100-240V~50/60Hz 0.5A/27VA Output:12V, 1.0A
Adapter 2	SHENZHEN FRECOM ELECTRONICS CO., LTD.	F12W3-120100SPAU	Input:100-240V~50/60Hz 0.3A Output:12V, 1A



### 3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	WHA YU	C037-511302-A	PIFA Antenna	N/A	2.60	-
2	-	-	Printed Antenna	N/A	2.12	-
3	Hong Lin	290-20081	PCB Antenna	I-PEX	-	3.3

Note:

**<For 2.4GHz Band>**


For IEEE 802.11b/g/n mode (2TX/2RX):

Ant. 1, Ant. 2 could transmit/receive simultaneously.

**<For 5GHz Band>**

For IEEE 802.11a/n/ac mode (1TX/1RX)

Ant. 3 could transmit/receive simultaneously.

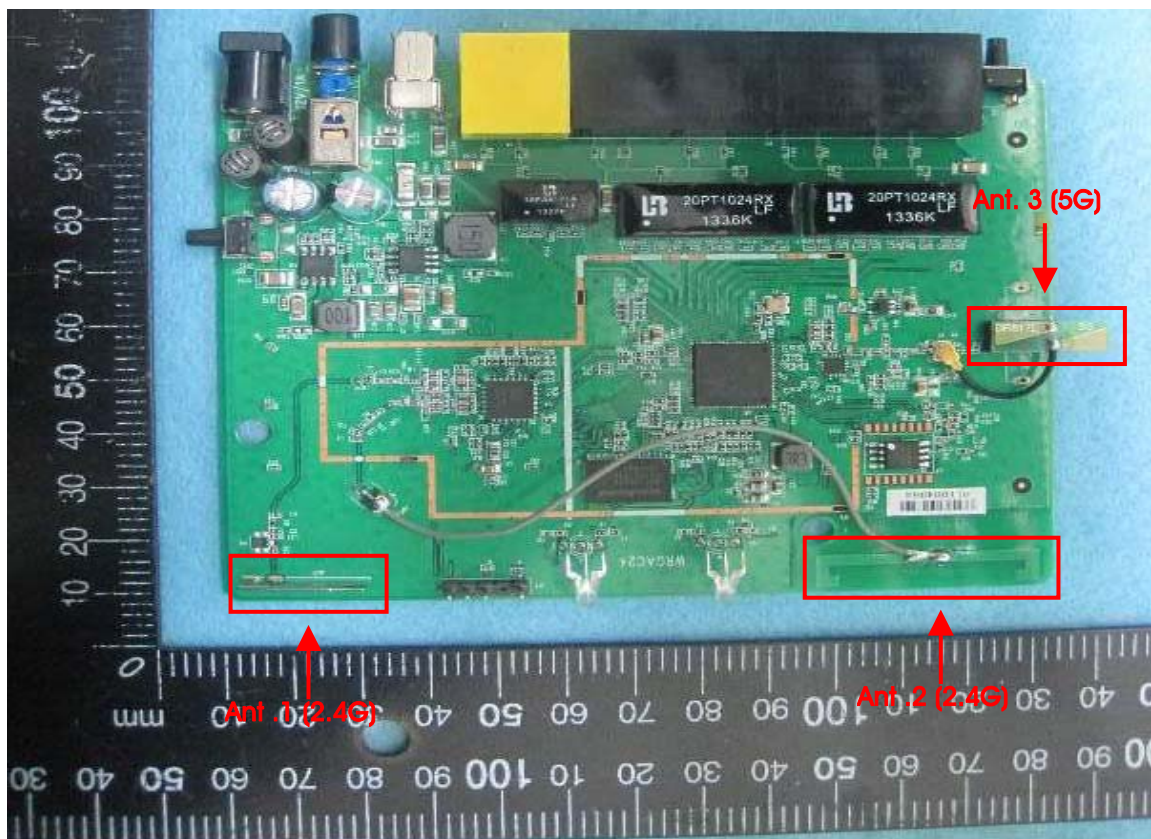

### 3.4. Table for Carrier Frequencies

#### For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

#### For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

#### For 2.4GHz Band:

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
6dB Spectrum Bandwidth	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	11n 20MHz	MCS0	1/6/11	1+2
	11n 40MHz	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

**For 5GHz Band:**

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11ac 20MHz	MCS0/Nss1	149/157/165	3
	11ac 40MHz	MCS0/Nss1	151/159	3
	11ac 80MHz	MCS0/Nss1	155	3
	11a/BPSK	6 Mbps	149/157/165	3
Power Spectral Density	11ac 20MHz	MCS0/Nss1	149/157/165	3
	11ac 40MHz	MCS0/Nss1	151/159	3
	11ac 80MHz	MCS0/Nss1	155	3
	11a/BPSK	6 Mbps	149/157/165	3
6dB Spectrum Bandwidth	11ac 20MHz	MCS0/Nss1	149/157/165	3
	11ac 40MHz	MCS0/Nss1	151/159	3
	11ac 80MHz	MCS0/Nss1	155	3
	11a/BPSK	6 Mbps	149/157/165	3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11ac 20MHz	MCS0/Nss1	149/157/165	3
	11ac 40MHz	MCS0/Nss1	151/159	3
	11ac 80MHz	MCS0/Nss1	155	3
	11a/BPSK	6 Mbps	149/157/165	3
Band Edge Emissions	11ac 20MHz	MCS0/Nss1	149/157/165	3
	11ac 40MHz	MCS0/Nss1	151/159	3
	11ac 80MHz	MCS0/Nss1	155	3
	11a/BPSK	6 Mbps	149/157/165	3

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Stand of EUT with Adapter 1

Mode 2. Stand of EUT with Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission <Below 1GHz> test:**

Mode 1. Stand of EUT with Adapter 1

Mode 2. Stand of EUT with Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission <Above 1GHz> test:**

Mode 1. CTX

**<For MPE and Co-location Test>:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple Listing

The EUT has two model names which are identical to each other in all aspects except for the following table:

Brand Name	Model Name	Case Color
D-Link	DIR-817L	Black
	DIR-817LW	Black/White/Red/Blue

From the above models, model: DIR-817L was selected as representative model for the test and its data was recorded in this report.

### 3.8. Table for Supporting Units

**For Test Site No: CO01-CB and 03CH01-CB <Below 1GHz>**

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E6430	DoC
Flash Disk	Transcend	604108 8255	DoC

**For Test Site No: TH01-CB and 03CH01-CB <Above 1GHz>**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### For 2.4GHz Band

##### Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	MP TOOL- RTL819x2.3-13/07/04		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	52/55	60/63	50/53

##### Power Parameters of IEEE 802.11n MCS0 40MHz

Test Software Version	MP TOOL- RTL819x2.3-13/07/04		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	44/47	52/55	45/48

##### Power Parameters of IEEE 802.11b/g

Test Software Version	MP TOOL- RTL819x2.3-13/07/04		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	36/40	37/41	36/40
IEEE 802.11g	50/53	60/63	50/53

#### For 5GHz Band

##### Power Parameters of IEEE 802.11ac MCS0/Nss1 20MHz

Test Software Version	DUTAPICLIENT_PCI.EXE		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 20MHz	54	63	63

##### Power Parameters of IEEE 802.11ac MCS0/Nss1 40MHz

Test Software Version	MP TOOL- RTL819x2.3-13/07/04	
Frequency	5755 MHz	5795 MHz
MCS0/Nss1 40MHz	53	63

##### Power Parameters of IEEE 802.11ac MCS0/Nss1 80MHz

Test Software Version	MP TOOL- RTL819x2.3-13/07/04	
Frequency	5775 MHz	
MCS0/Nss1 80MHz	46	

##### Power Parameters of IEEE 802.11a

Test Software Version	MP TOOL- RTL819x2.3-13/07/04		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	56	63	63


### 3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 3.11. Duty Cycle


For 2.4GHz Band:

IEEE 802.11n MCS0 20MHz

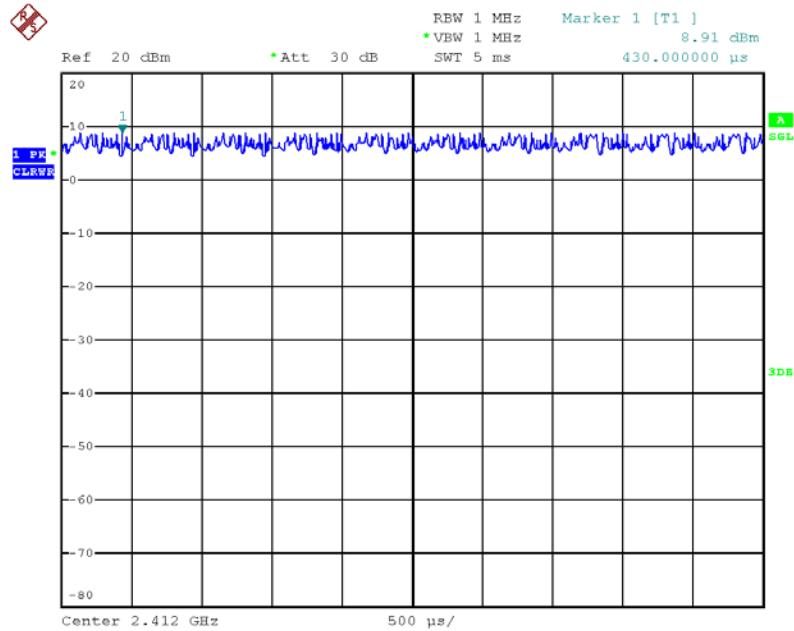

Date: 12.DEC.2013 21:42:15


IEEE 802.11n MCS0 40MHz

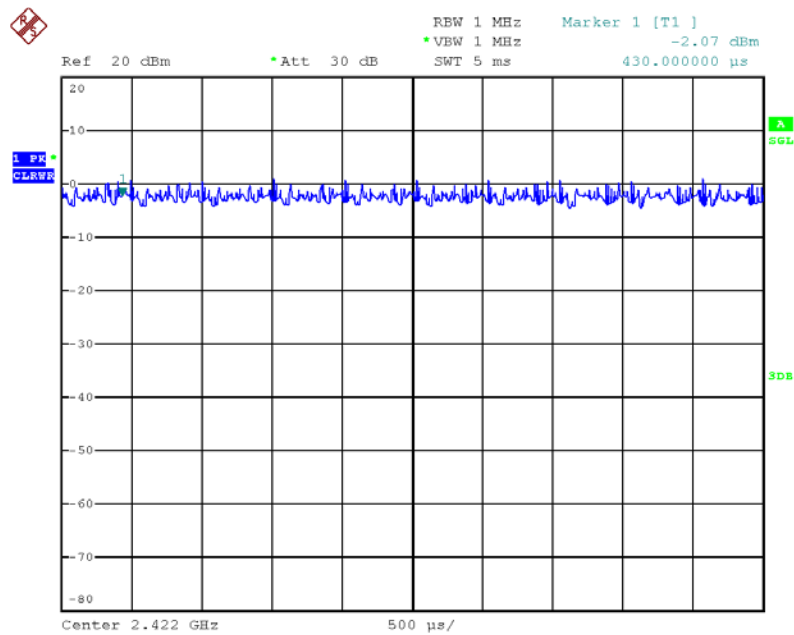

Date: 12.DEC.2013 21:42:40




IEEE 802.11b

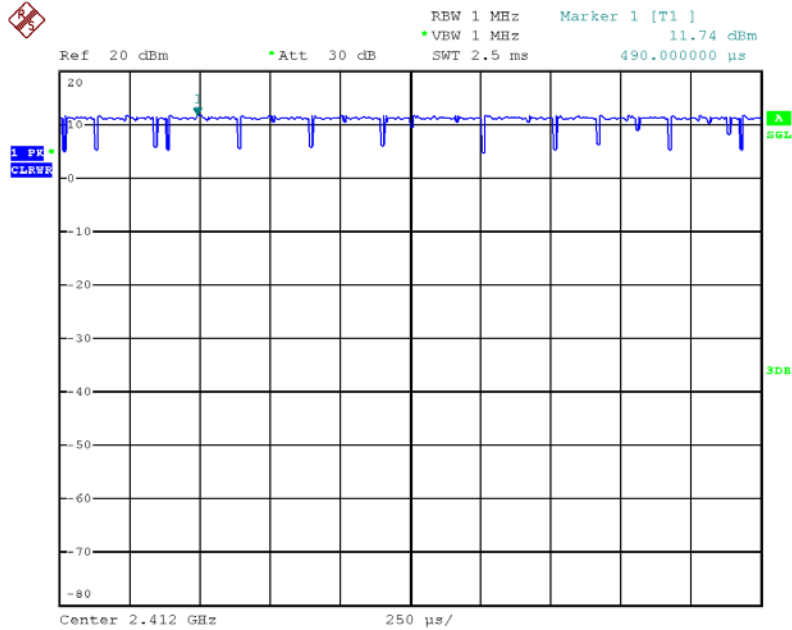

Date: 12.DEC.2013 21:39:38


IEEE 802.11g

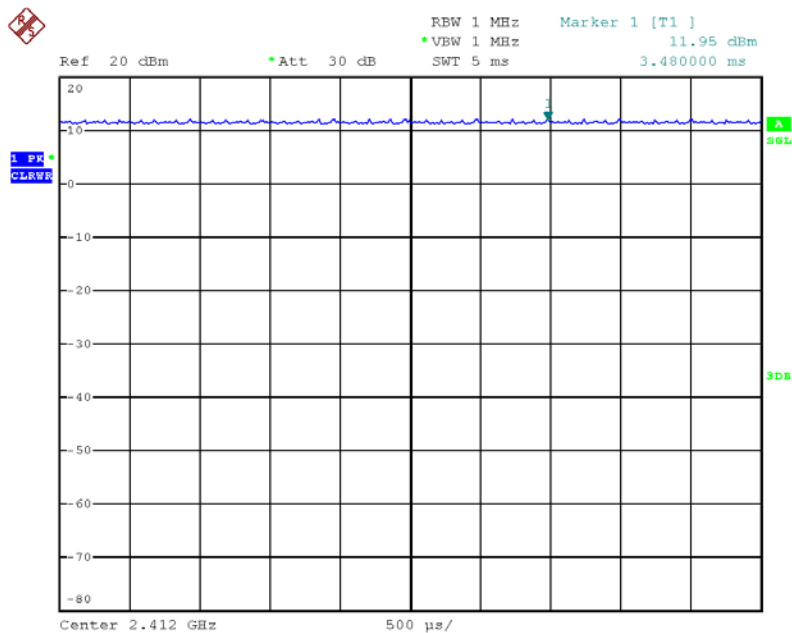

Date: 12.DEC.2013 21:41:37


For 5GHz Band:

IEEE 802.11ac MCS0/Nss1 20MHz

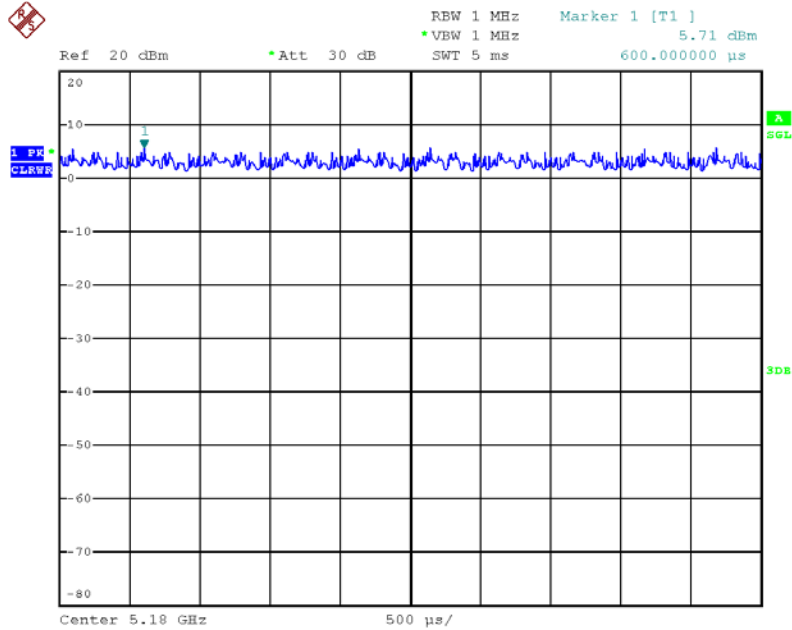

Date: 12.DEC.2013 22:03:04

IEEE 802.11ac MCS0/Nss1 40MHz

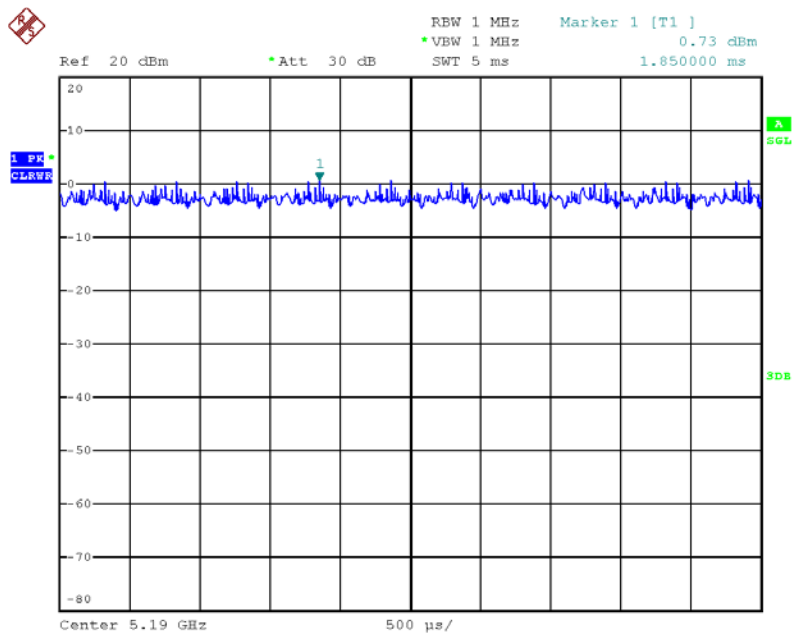


Date: 12.DEC.2013 22:03:30




### 3.12. Test Configurations

#### 3.12.1.AC Power Line Conduction Emissions and Radiation Emissions(30MHz~1GHz) Test Configuration

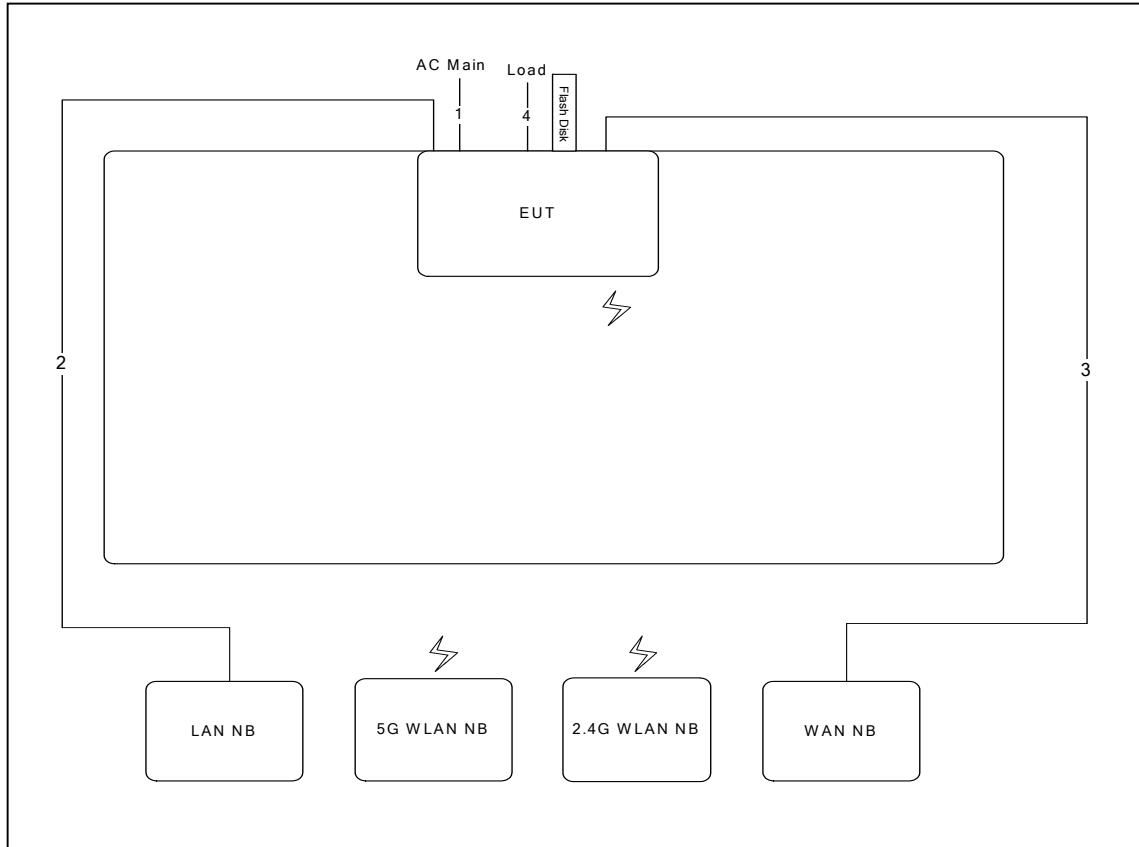

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	3m

3.12.2. Radiation Emissions(above 1GHz) Test Configuration

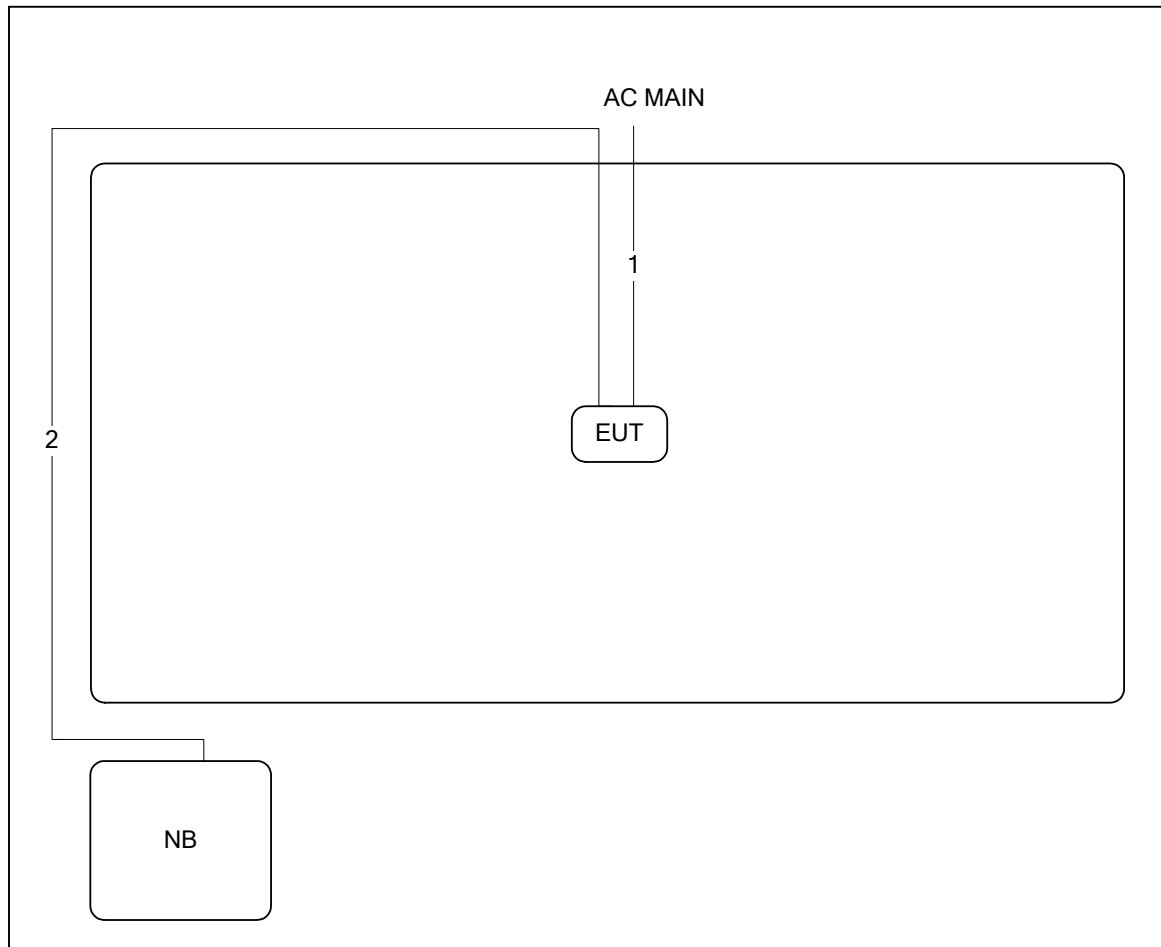

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



## 4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	20°C	Humidity	51%
Test Engineer	Justin Chiu	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

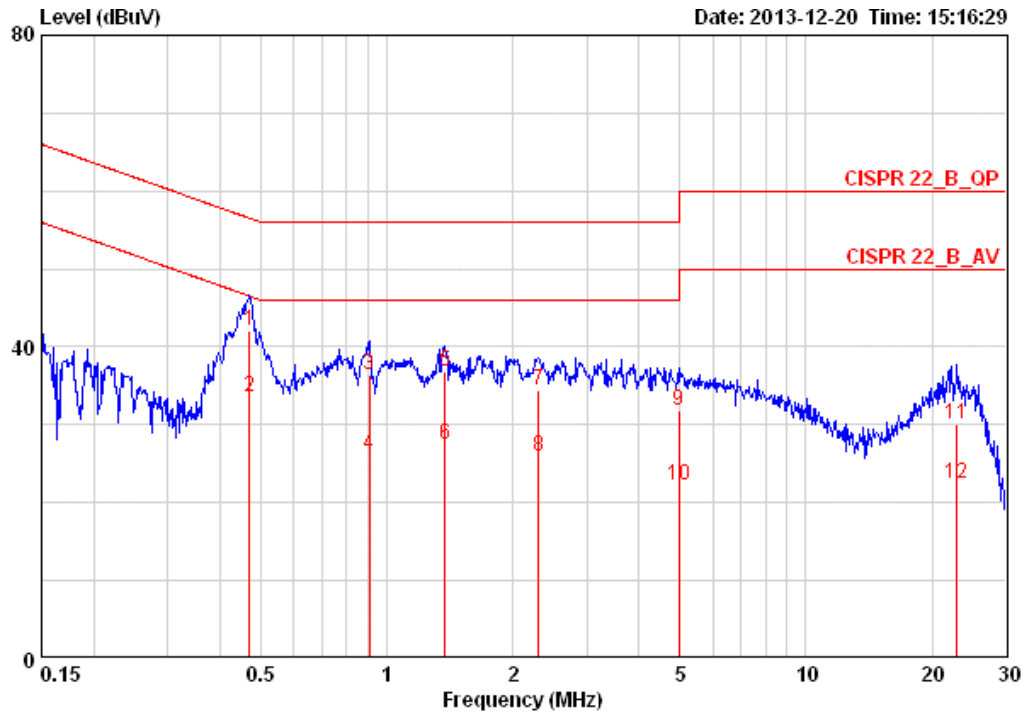

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.47110	42.16	-14.33	56.49	41.83	0.15	0.18	LINE	QP
2	0.47110	33.51	-12.98	46.49	33.18	0.15	0.18	LINE	AVERAGE
3	0.90874	36.37	-19.63	56.00	36.01	0.16	0.20	LINE	QP
4	0.90874	26.25	-19.75	46.00	25.89	0.16	0.20	LINE	AVERAGE
5	1.374	36.75	-19.25	56.00	36.36	0.17	0.22	LINE	QP
6	1.374	27.49	-18.51	46.00	27.10	0.17	0.22	LINE	AVERAGE
7	2.297	34.49	-21.51	56.00	34.03	0.20	0.26	LINE	QP
8	2.297	25.84	-20.16	46.00	25.38	0.20	0.26	LINE	AVERAGE
9	4.978	31.77	-24.23	56.00	31.16	0.29	0.32	LINE	QP
10	4.978	22.23	-23.77	46.00	21.62	0.29	0.32	LINE	AVERAGE
11	22.896	29.98	-30.02	60.00	28.74	0.69	0.55	LINE	QP
12	22.896	22.50	-27.50	50.00	21.26	0.69	0.55	LINE	AVERAGE



Temperature	20°C	Humidity	51%
Test Engineer	Justin Chiu	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

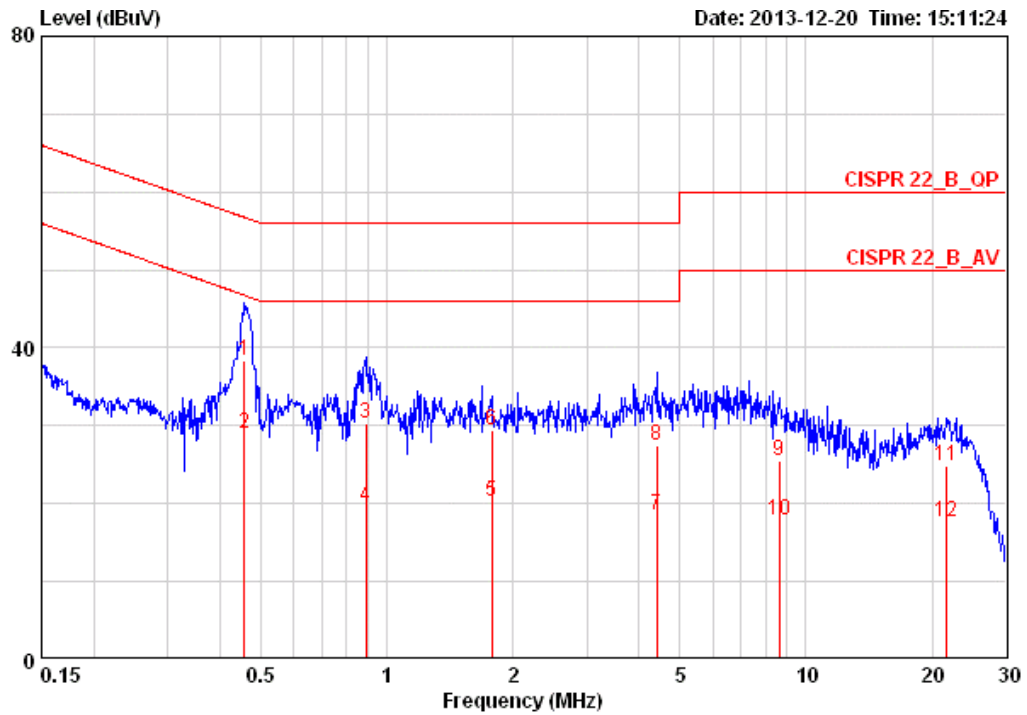

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.45636	38.35	-18.40	56.76	38.10	0.07	0.18	NEUTRAL	QP
2	0.45636	28.89	-17.86	46.76	28.64	0.07	0.18	NEUTRAL	AVERAGE
3	0.88969	30.27	-25.73	56.00	29.99	0.08	0.20	NEUTRAL	QP
4	0.88969	19.64	-26.36	46.00	19.36	0.08	0.20	NEUTRAL	AVERAGE
5	1.781	20.24	-25.76	46.00	19.89	0.10	0.24	NEUTRAL	AVERAGE
6	1.781	29.39	-26.61	56.00	29.04	0.10	0.24	NEUTRAL	QP
7	4.407	18.43	-27.57	46.00	17.98	0.14	0.31	NEUTRAL	AVERAGE
8	4.407	27.37	-28.63	56.00	26.92	0.14	0.31	NEUTRAL	QP
9	8.637	25.44	-34.56	60.00	24.83	0.24	0.37	NEUTRAL	QP
10	8.637	17.86	-32.14	50.00	17.25	0.24	0.37	NEUTRAL	AVERAGE
11	21.600	24.92	-35.08	60.00	23.87	0.52	0.53	NEUTRAL	QP
12	21.600	17.75	-32.25	50.00	16.70	0.52	0.53	NEUTRAL	AVERAGE

Note:

$$\text{Level} = \text{Read Level} + \text{LISN Factor} + \text{Cable Loss}$$

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

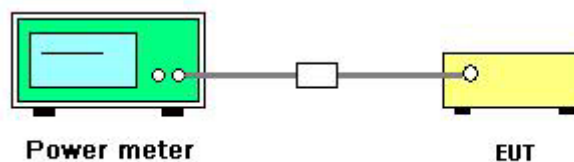

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	56%
Test Engineer	David Tseng	Configurations	IEEE 802.11n/ac
Test Date	Dec. 17, 2013		

##### For 2.4GHz Band

##### Configuration IEEE 802.11n MCS0 20MHz / Ant.1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	18.69	18.44	21.58	30.00	Complies
6	2437 MHz	21.75	21.29	24.54	30.00	Complies
11	2462 MHz	17.45	17.05	20.26	30.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Ant.1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
3	2422 MHz	14.47	14.24	17.37	30.00	Complies
6	2437 MHz	18.18	17.97	21.09	30.00	Complies
9	2452 MHz	15.05	14.62	17.85	30.00	Complies

##### For 5GHz Band

##### Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	19.88	30.00	Complies
157	5785 MHz	21.91	30.00	Complies
165	5825 MHz	21.49	30.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	18.76	30.00	Complies
159	5795 MHz	20.79	30.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
155	5775 MHz	16.75	30.00	Complies

<b>Temperature</b>	20°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a/b/g
<b>Test Date</b>	Dec. 17, 2013		

**Configuration IEEE 802.11b / Ant.1 + Ant. 2**

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	16.39	15.85	19.14	30.00	Complies
6	2437 MHz	16.85	16.37	19.63	30.00	Complies
11	2462 MHz	16.21	15.75	19.00	30.00	Complies

**Configuration IEEE 802.11g / Ant.1 + Ant. 2**

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	17.58	17.44	20.52	30.00	Complies
6	2437 MHz	21.69	21.27	24.50	30.00	Complies
11	2462 MHz	17.76	17.29	20.54	30.00	Complies

**Configuration IEEE 802.11a / Ant. 3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	20.62	30.00	Complies
157	5785 MHz	21.96	30.00	Complies
165	5825 MHz	21.54	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

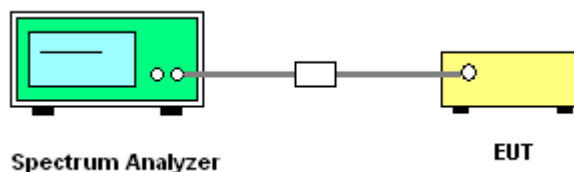

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	56%
Test Engineer	David Tseng	Configurations	IEEE 802.11n/ac

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	-9.20	-11.14	-7.05	8.00	Complies
6	2437 MHz	-8.58	-7.46	-4.97	8.00	Complies
11	2462 MHz	-11.76	-10.61	-8.14	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
3	2422 MHz	-17.06	-16.11	-13.55	8.00	Complies
6	2437 MHz	-12.68	-11.83	-9.22	8.00	Complies
9	2452 MHz	-16.12	-16.71	-13.39	8.00	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
149	5745 MHz	-7.53	8.00	Complies
157	5785 MHz	-6.00	8.00	Complies
165	5825 MHz	-6.87	8.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
151	5755 MHz	-10.99	8.00	Complies
159	5795 MHz	-9.72	8.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 3

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
155	5775 MHz	-12.37	8.00	Complies

<b>Temperature</b>	20°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11a/b/g

**Configuration IEEE 802.11b / Ant. 1 + Ant. 2**

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	-14.26	-15.49	-11.82	8.00	Complies
6	2437 MHz	-13.55	-15.16	-11.27	8.00	Complies
11	2462 MHz	-14.01	-15.15	-11.53	8.00	Complies

**Configuration IEEE 802.11g / Ant. 1 + Ant. 2**

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Total		
1	2412 MHz	-11.08	-11.86	-8.44	8.00	Complies
6	2437 MHz	-9.61	-8.73	-6.14	8.00	Complies
11	2462 MHz	-11.07	-11.31	-8.18	8.00	Complies

**Configuration IEEE 802.11a / Ant. 3**


Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
149	5745 MHz	-7.27	8.00	Complies
157	5785 MHz	-6.89	8.00	Complies
165	5825 MHz	-7.35	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Ant. 1**

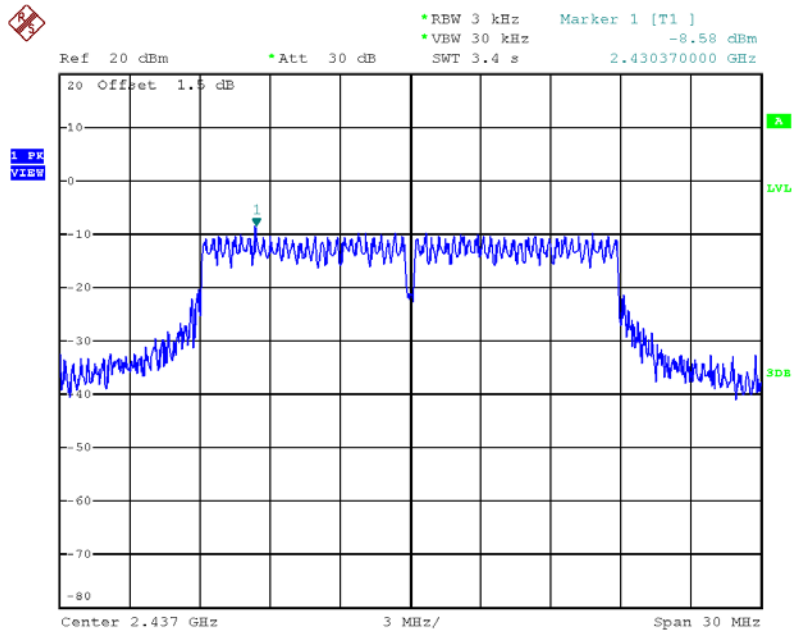


Date: 12.DEC.2013 20:40:25

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz / Ant. 2**

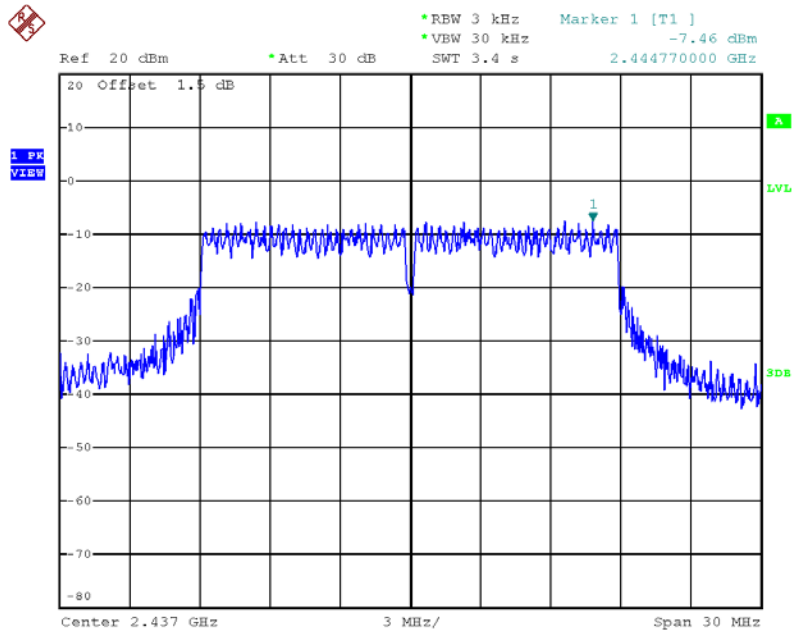


Date: 12.DEC.2013 20:41:04

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Ant. 1**

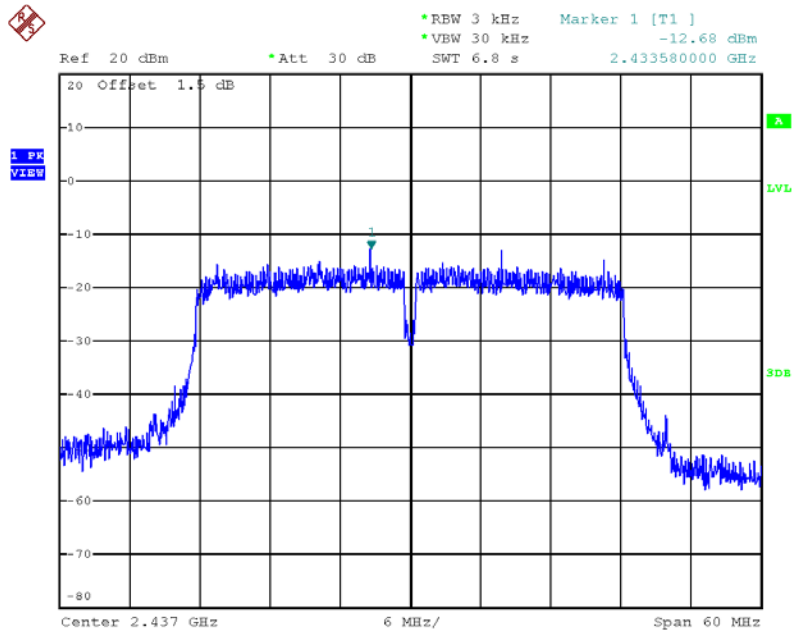


Date: 12.DEC.2013 20:48:04

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz / Ant. 2**

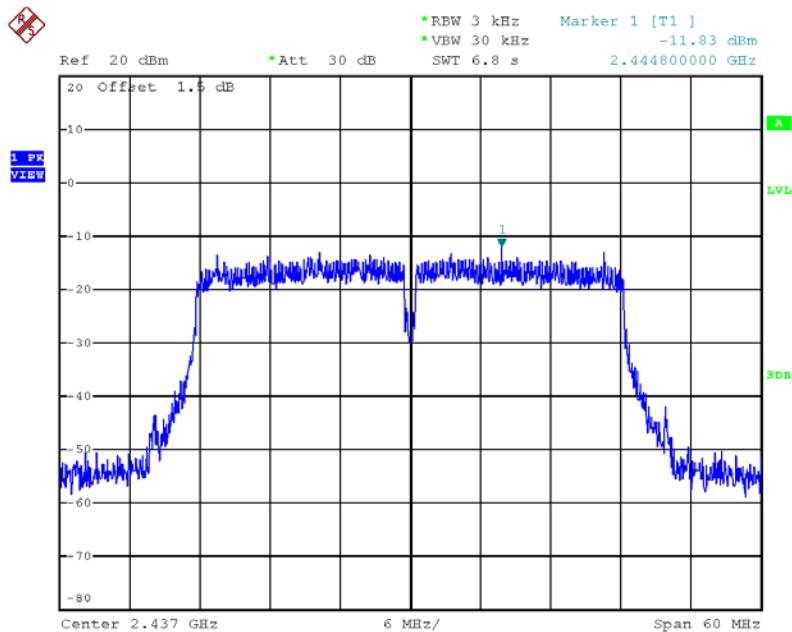


Date: 12.DEC.2013 20:47:10

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / 5785 MHz / Ant. 3**

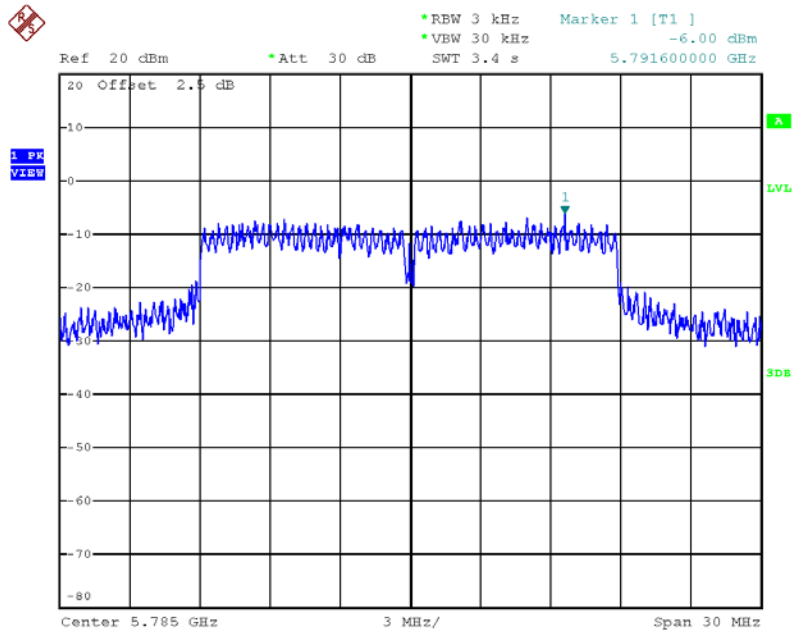


Date: 12.DEC.2013 20:55:32

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / 5795 MHz / Ant. 3**

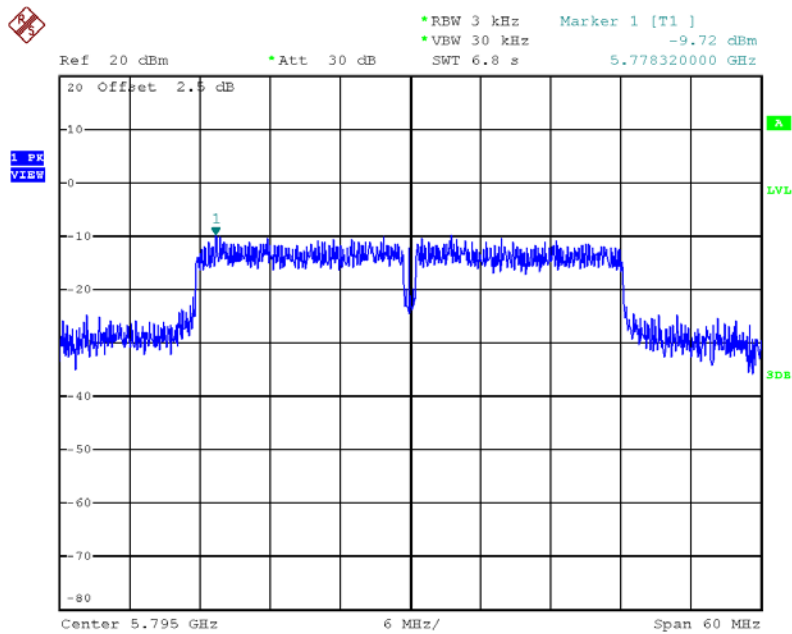


Date: 12.DEC.2013 20:57:56

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / 5775 MHz / Ant. 3**

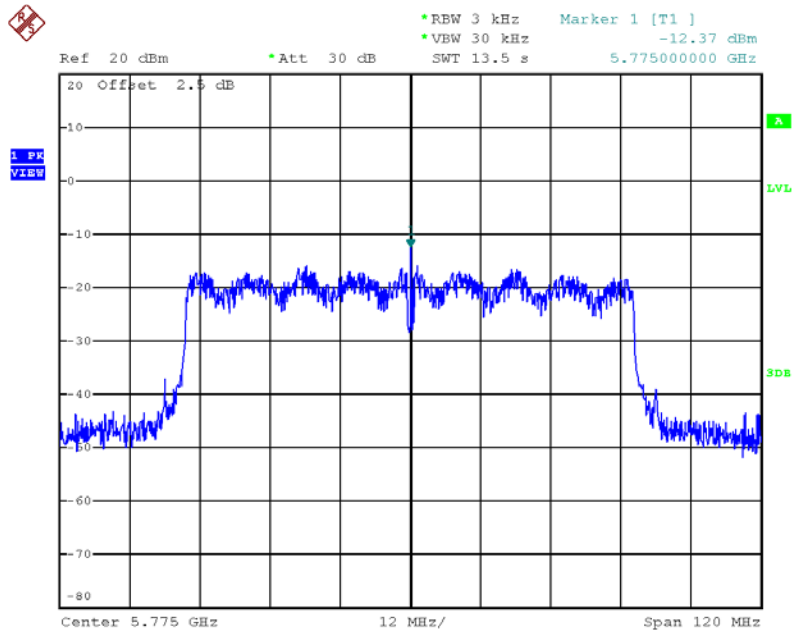


Date: 12.DEC.2013 21:00:36

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1**

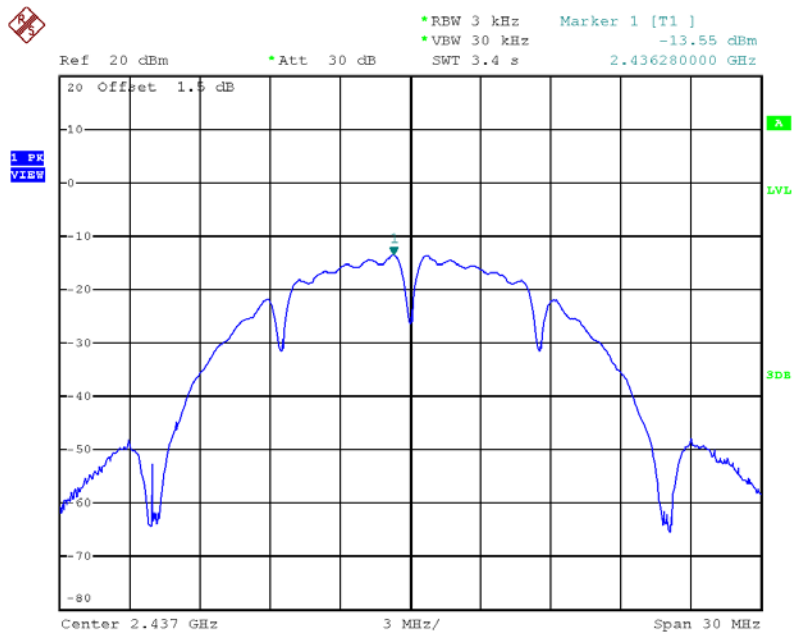


Date: 12.DEC.2013 20:16:06

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 2**

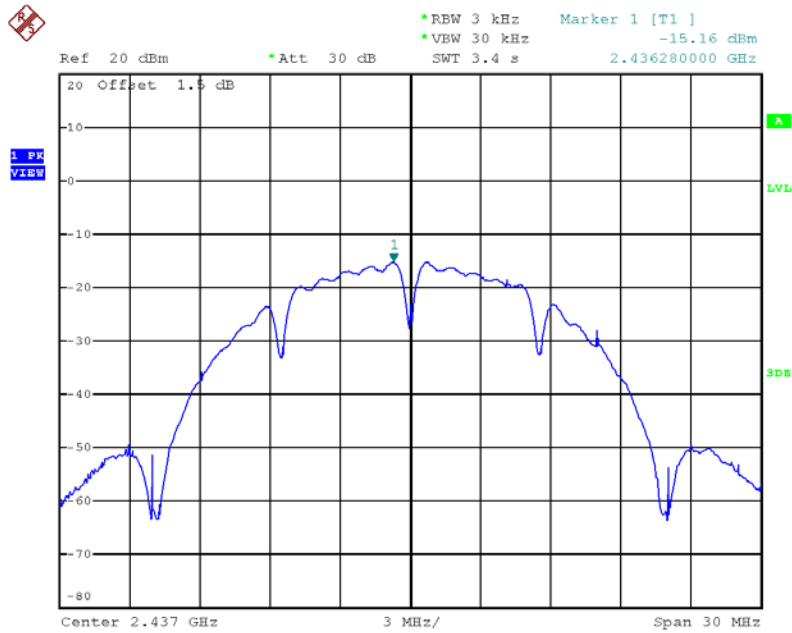


Date: 12.DEC.2013 20:18:40

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1**

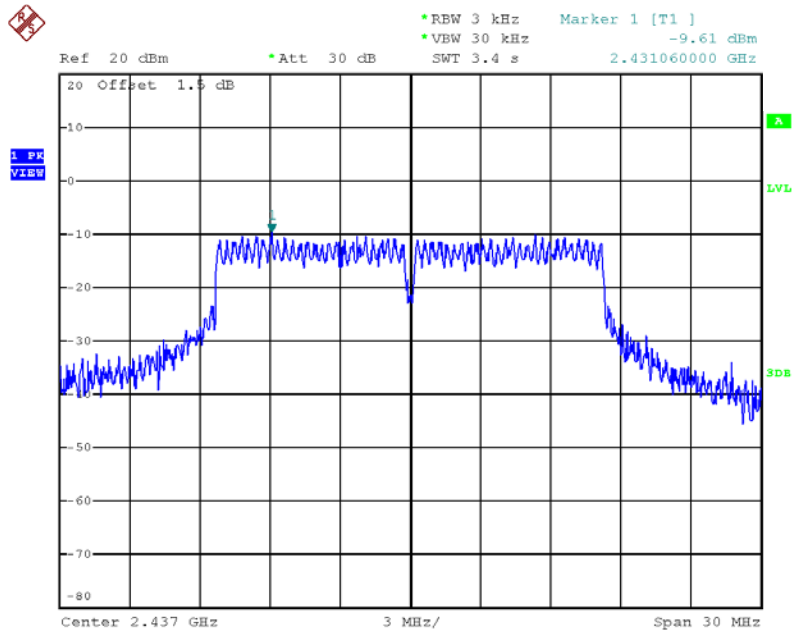


Date: 12.DEC.2013 20:28:15

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 2**

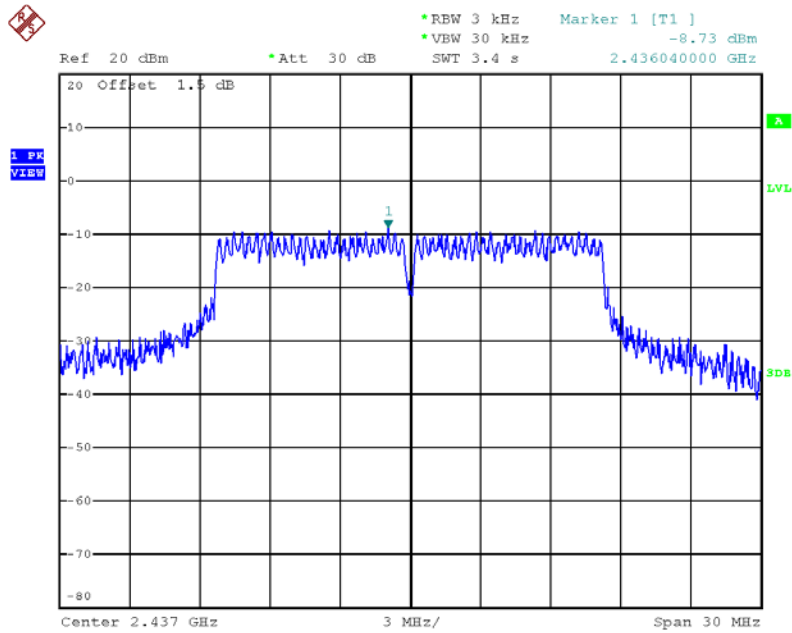

Date: 12.DEC.2013 20:30:29

**Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Ant. 3**

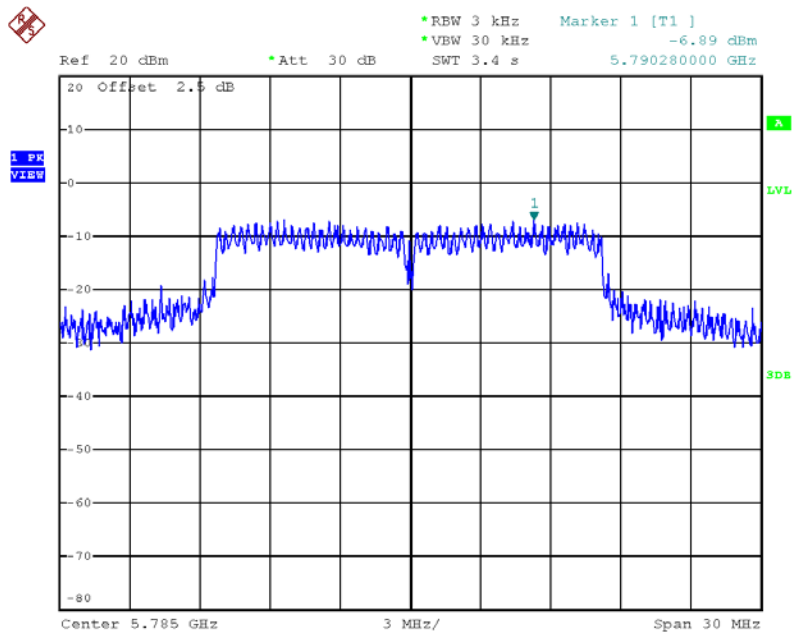

Date: 12.DEC.2013 20:52:32

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	20°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11n/ac

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.76	17.76	500	Complies
6	2437 MHz	17.76	18.96	500	Complies
11	2462 MHz	17.76	17.76	500	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.16	500	Complies
6	2437 MHz	36.48	36.16	500	Complies
9	2452 MHz	36.32	36.16	500	Complies



**For 5GHz Band**
**Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Ant. 3**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.60	26.88	500	Complies
157	5785 MHz	17.60	33.28	500	Complies
165	5825 MHz	17.76	32.48	500	Complies

**Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Ant. 3**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.48	38.40	500	Complies
159	5795 MHz	36.16	63.04	500	Complies

**Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 3**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	76.48	88.00	500	Complies

<b>Temperature</b>	20°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	David Tseng	<b>Configurations</b>	IEEE 802.11 a/b/g

**Configuration IEEE 802.11b / Ant. 1 + Ant. 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	7.60	15.12	500	Complies
6	2437 MHz	9.60	15.04	500	Complies
11	2462 MHz	10.08	15.12	500	Complies

**Configuration IEEE 802.11g / Ant. 1 + Ant. 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.96	16.64	500	Complies
6	2437 MHz	10.64	16.64	500	Complies
11	2462 MHz	10.48	16.40	500	Complies


**Configuration IEEE 802.11a / Ant. 3**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.32	28.16	500	Complies
157	5785 MHz	16.48	31.84	500	Complies
165	5825 MHz	16.32	32.00	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz / Ant. 1 + Ant. 2

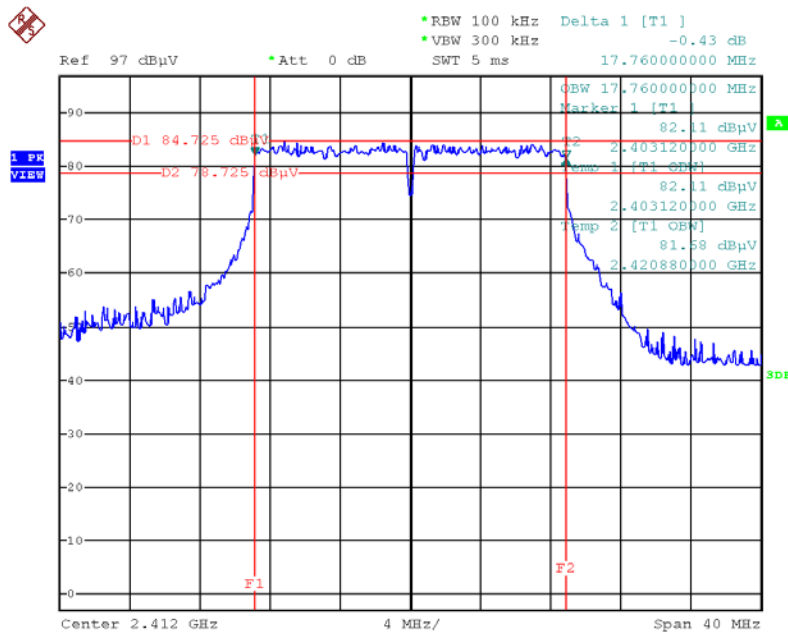


Date: 12.DEC.2013 21:25:16

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz / Ant. 1 + Ant. 2

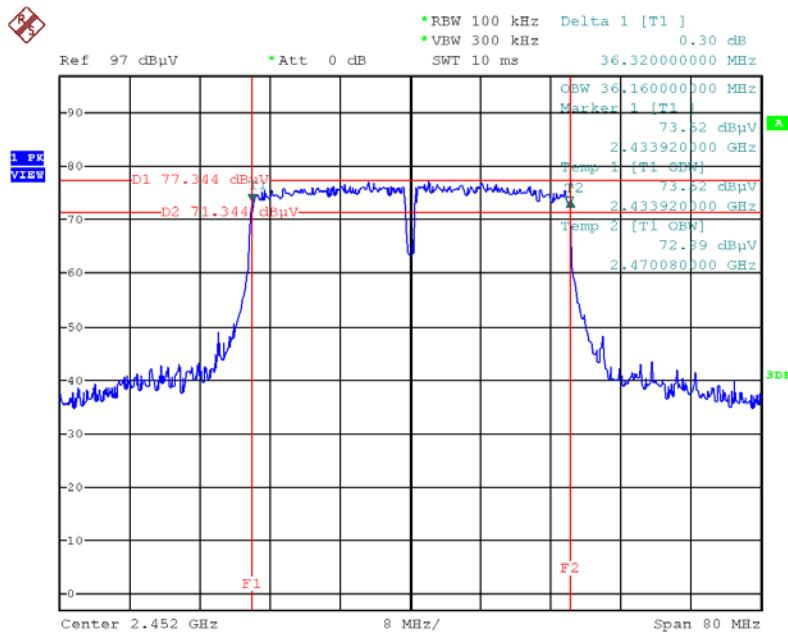


Date: 12.DEC.2013 21:37:27

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / 5745 MHz / Ant. 3

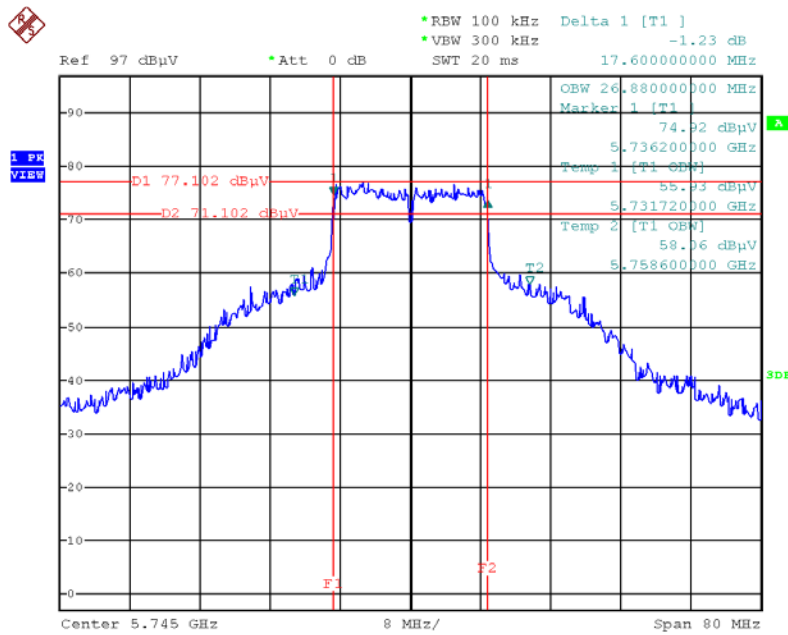


Date: 12.DEC.2013 21:07:55

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / 5795MHz / Ant. 3

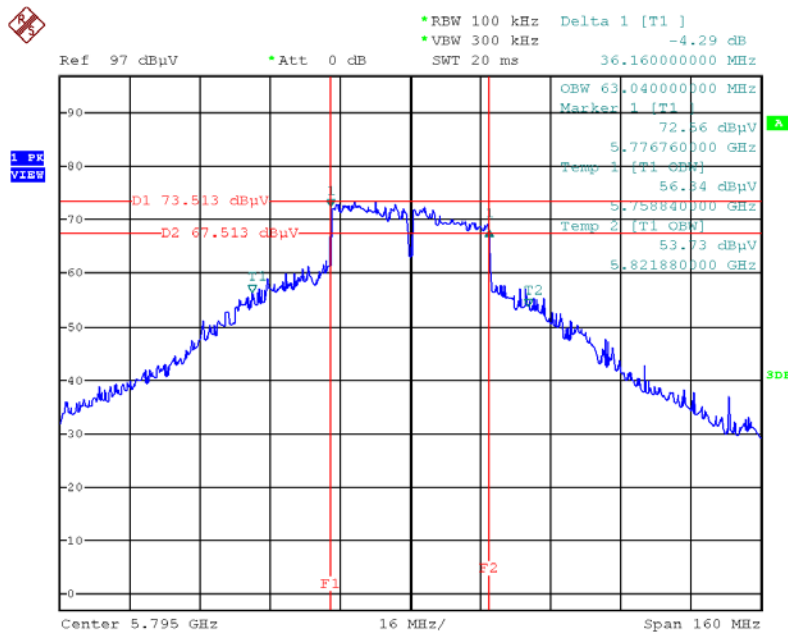


Date: 12.DEC.2013 21:10:50

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / 5775 MHz / Ant. 3

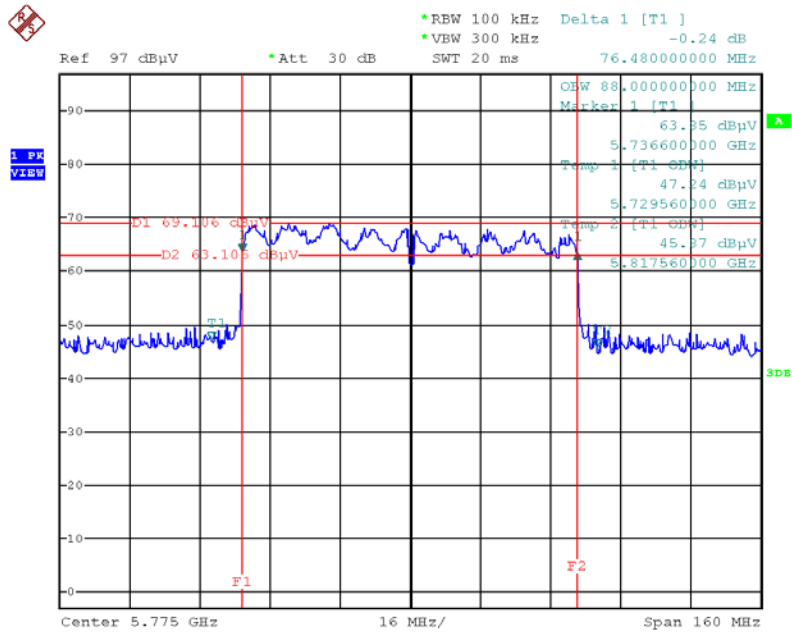


Date: 12.DEC.2013 21:12:17

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 1 + Ant. 2

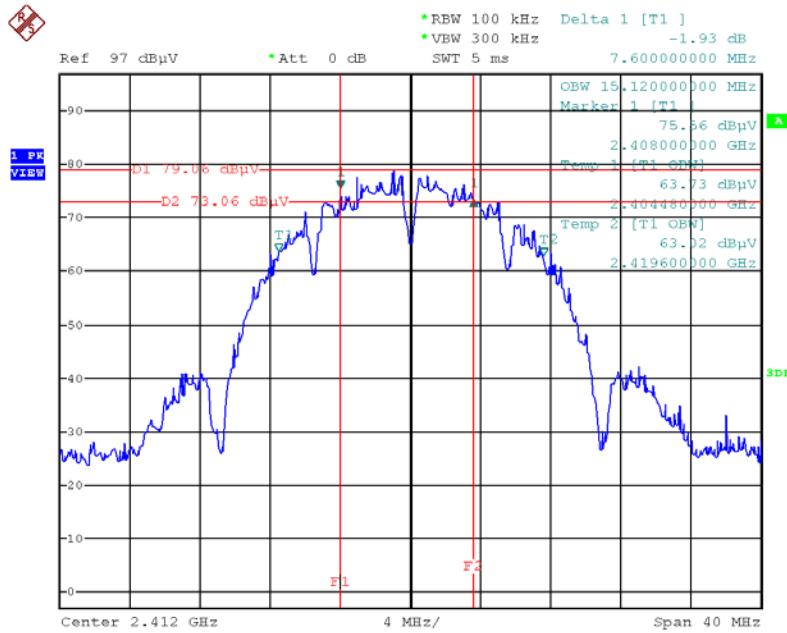


Date: 12.DEC.2013 21:31:17

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1 + Ant. 2

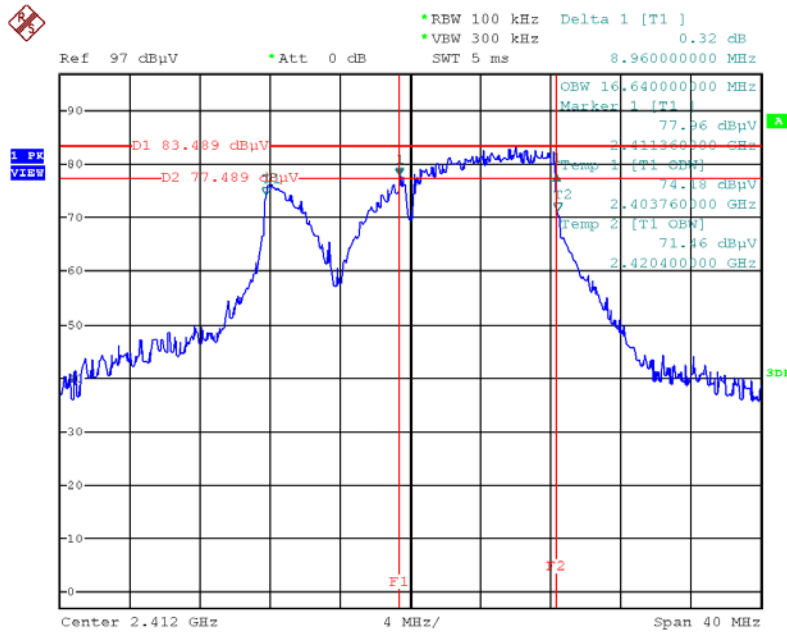

Date: 12.DEC.2013 21:30:12

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 3

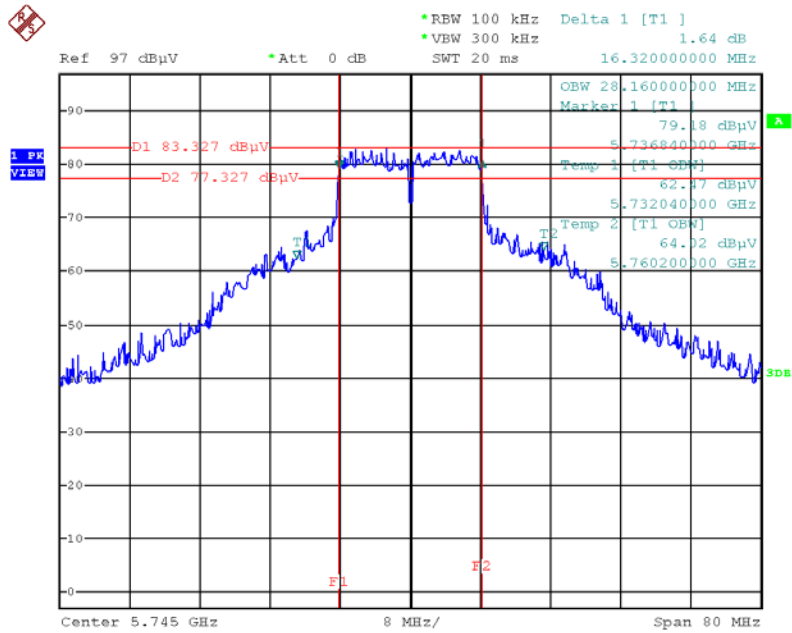

Date: 12.DEC.2013 21:05:41

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1GHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP




### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

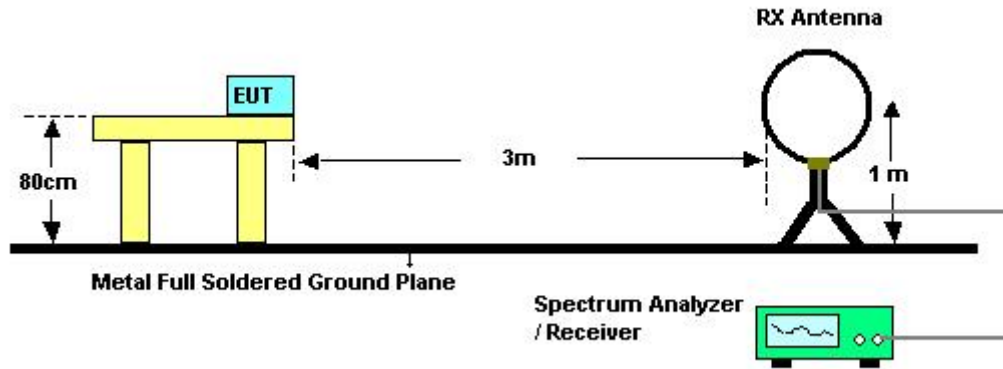

For Radiated Emissions: 30MHz~1GHz

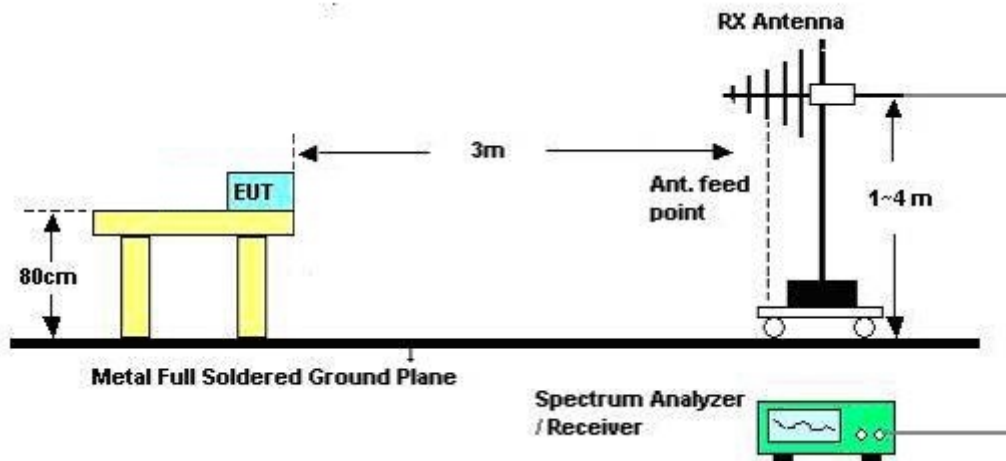

For Radiated Emissions: Above 1GHz

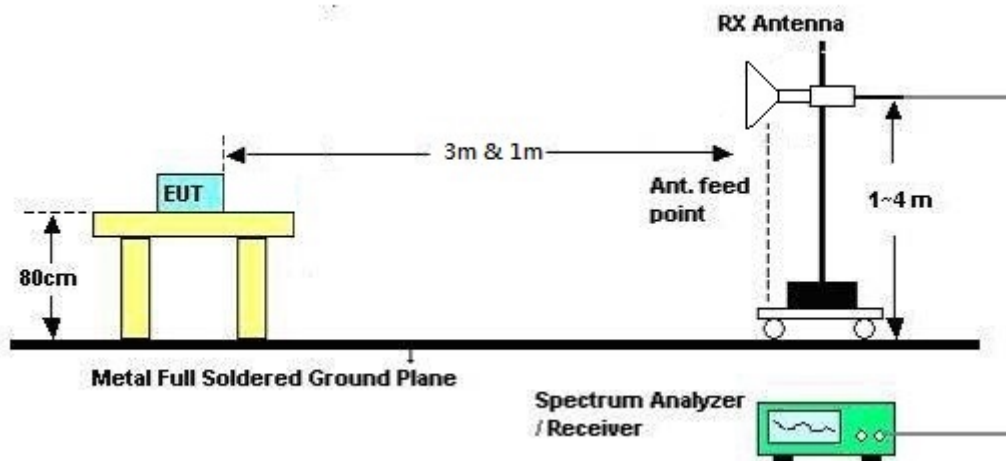

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Dec. 19, 2013		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	54%
Test Engineer	Serway Li	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

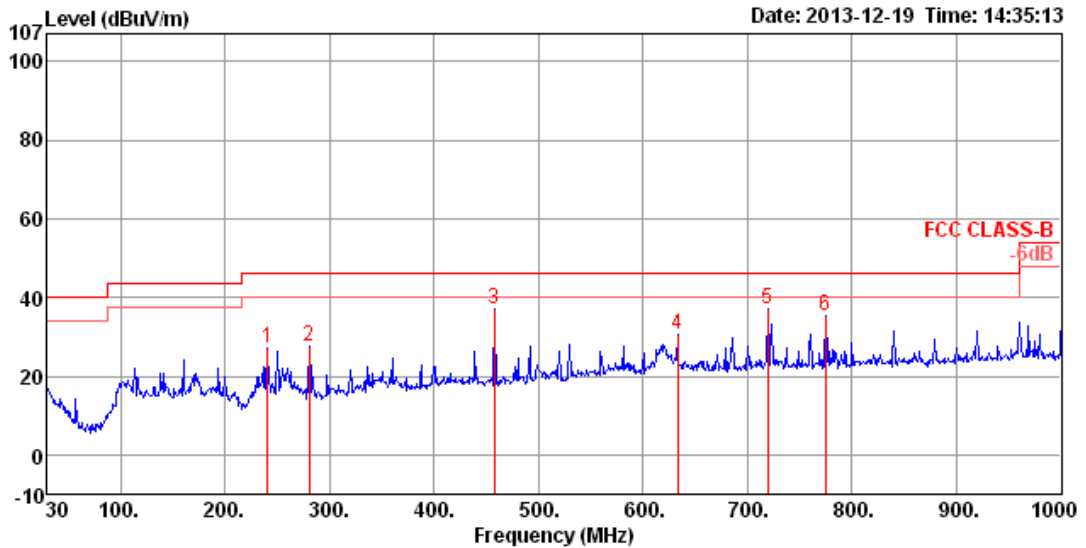

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	240.49	27.11	46.00	-18.89	45.78	1.86	10.91	31.44	125	124	HORIZONTAL Peak
2	280.26	27.41	46.00	-18.59	44.38	2.02	12.56	31.55	150	98	HORIZONTAL Peak
3	457.77	37.05	46.00	-8.95	49.27	2.67	16.30	31.19	150	338	HORIZONTAL Peak
4	633.34	30.37	46.00	-15.63	39.99	3.19	18.62	31.43	150	334	HORIZONTAL Peak
5	719.67	37.08	46.00	-8.92	45.59	3.45	19.28	31.24	150	259	HORIZONTAL Peak
6	774.96	35.42	46.00	-10.58	43.44	3.62	19.71	31.35	150	298	HORIZONTAL Peak

**Vertical**

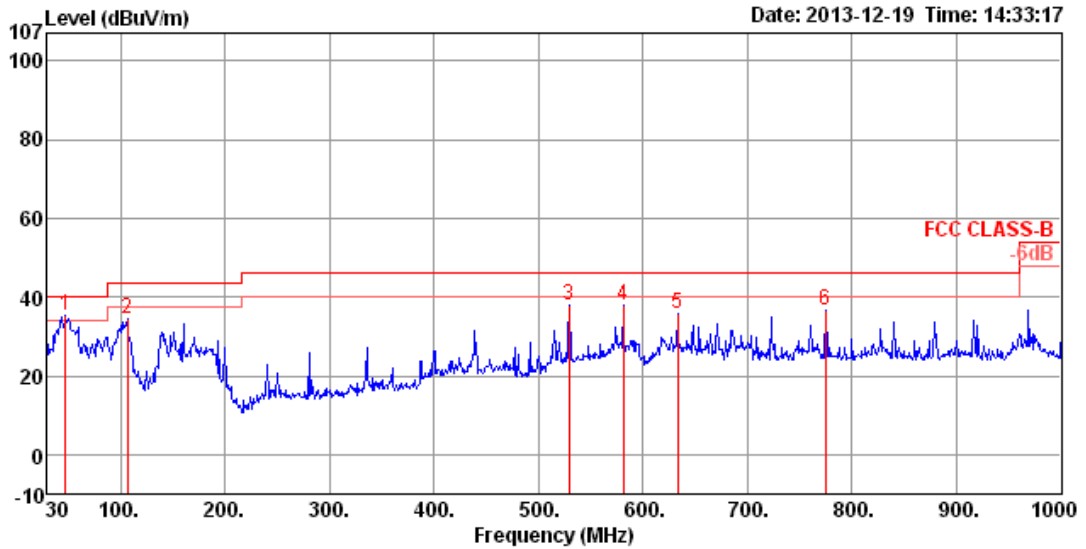

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	47.46	35.39	40.00	-4.61	57.76	0.82	8.62	31.81	100	214	VERTICAL Peak
2	106.63	34.39	43.50	-9.11	53.61	1.23	11.11	31.56	100	79	VERTICAL Peak
3	529.55	37.86	46.00	-8.14	48.89	2.89	17.47	31.39	125	93	VERTICAL Peak
4	580.96	37.90	46.00	-8.10	47.63	3.06	18.39	31.18	125	254	VERTICAL Peak
5	633.34	35.91	46.00	-10.09	45.53	3.19	18.62	31.43	200	245	VERTICAL Peak
6	774.96	36.59	46.00	-9.41	44.61	3.62	19.71	31.35	100	342	VERTICAL Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)**

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 1 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4821.84	48.08	74.00	-25.92	46.74	3.31	33.06	35.03	Peak	100	327	HORIZONTAL
2	4823.04	34.95	54.00	-19.05	33.61	3.31	33.06	35.03	Average	100	327	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4822.88	37.97	54.00	-16.03	36.63	3.31	33.06	35.03	Average	120	291	VERTICAL
2	4823.76	50.49	74.00	-23.51	49.15	3.31	33.06	35.03	Peak	120	291	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 6 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.12	53.25	74.00	-20.75	51.79	3.33	33.16	35.03	Peak	126	235	HORIZONTAL
2	4873.68	38.85	54.00	-15.15	37.39	3.33	33.16	35.03	Average	126	235	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4877.61	40.85	54.00	-13.15	39.39	3.33	33.16	35.03	Average	102	266	VERTICAL
2	4884.10	55.29	74.00	-18.71	53.83	3.33	33.16	35.03	Peak	102	266	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 11 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4924.09	38.47	54.00	-15.53	36.87	3.35	33.26	35.01	Average	122	223	HORIZONTAL
2	4924.41	51.24	74.00	-22.76	49.64	3.35	33.26	35.01	Peak	122	223	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.24	52.82	74.00	-21.18	51.22	3.35	33.26	35.01	Peak	145	260	VERTICAL
2	4927.69	39.50	54.00	-14.50	37.90	3.35	33.26	35.01	Average	145	260	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 3 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4843.71	31.07	54.00	-22.93	29.69	3.32	33.09	35.03	Average	100	166	HORIZONTAL
2	4844.38	44.27	74.00	-29.73	42.89	3.32	33.09	35.03	Peak	100	166	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4843.56	46.61	74.00	-27.39	45.23	3.32	33.09	35.03	Peak	118	288	VERTICAL
2	4844.00	34.52	54.00	-19.48	33.14	3.32	33.09	35.03	Average	118	288	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 6 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.99	32.30	54.00	-21.70	30.84	3.33	33.16	35.03	Average	100	178	HORIZONTAL
2	4874.31	45.21	74.00	-28.79	43.75	3.33	33.16	35.03	Peak	100	178	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4866.07	46.82	74.00	-27.18	45.40	3.33	33.12	35.03	Peak	117	293	VERTICAL
2	4873.76	35.00	54.00	-19.00	33.54	3.33	33.16	35.03	Average	117	293	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 9 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.75	30.92	54.00	-23.08	29.41	3.34	33.19	35.02	Average	100	263	HORIZONTAL
2	4903.90	43.46	74.00	-30.54	41.95	3.34	33.19	35.02	Peak	100	263	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4904.31	43.01	74.00	-30.99	41.50	3.34	33.19	35.02	Peak	100	181	VERTICAL
2	4904.32	30.65	54.00	-23.35	29.14	3.34	33.19	35.02	Average	100	181	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 20MHz CH 149 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11489.90	48.21	54.00	-5.79	37.79	6.74	34.82	38.50	Average	220	106	HORIZONTAL
2	11490.00	59.09	74.00	-14.91	48.67	6.74	34.82	38.50	Peak	220	106	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11488.92	54.97	74.00	-19.03	44.55	6.74	34.82	38.50	Peak	159	100	VERTICAL
2	11490.04	43.89	54.00	-10.11	33.47	6.74	34.82	38.50	Average	159	105	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 20MHz CH 157 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11569.86	59.10	74.00	-14.90	48.68	6.77	34.85	38.50	Peak	220	112	HORIZONTAL
2	11569.90	49.47	54.00	-4.53	39.05	6.77	34.85	38.50	Average	220	112	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11569.92	43.80	54.00	-10.20	33.38	6.77	34.85	38.50	Average	202	100	VERTICAL
2	11569.98	55.58	74.00	-18.42	45.16	6.77	34.85	38.50	Peak	202	100	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 20MHz CH 165 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11649.94	49.83	54.00	-4.17	39.40	6.80	34.87	38.50	Average	216	107	HORIZONTAL
2	11652.44	59.39	74.00	-14.61	48.96	6.80	34.87	38.50	Peak	216	107	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11649.82	53.16	74.00	-20.84	42.73	6.80	34.87	38.50	Peak	194	100	VERTICAL
2	11649.96	42.37	54.00	-11.63	31.94	6.80	34.87	38.50	Average	194	100	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 40MHz CH 151 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11509.86	48.61	54.00	-5.39	38.18	6.75	34.82	38.50	Average	220	111	HORIZONTAL
2	11510.18	57.11	74.00	-16.89	46.68	6.75	34.82	38.50	Peak	220	111	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11509.64	52.75	74.00	-21.25	42.32	6.75	34.82	38.50	Peak	199	100	VERTICAL
2	11509.94	42.35	54.00	-11.65	31.92	6.75	34.82	38.50	Average	199	100	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 40MHz CH 159 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11589.92	47.78	54.00	-6.22	37.35	6.78	34.85	38.50	Average	217	107	HORIZONTAL
2	11590.00	58.79	74.00	-15.21	48.36	6.78	34.85	38.50	Peak	217	107	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11589.76	53.00	74.00	-21.00	42.57	6.78	34.85	38.50	Peak	208	100	VERTICAL
2	11589.96	41.26	54.00	-12.74	30.83	6.78	34.85	38.50	Average	208	100	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 80MHz CH 155 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11549.90	48.12	54.00	-5.88	37.69	6.77	34.84	38.50	Average	220	109	HORIZONTAL
2	11550.02	58.41	74.00	-15.59	47.98	6.77	34.84	38.50	Peak	220	109	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11549.86	41.84	54.00	-12.16	31.41	6.77	34.84	38.50	Average	174	100	VERTICAL
2	11550.06	53.80	74.00	-20.20	43.37	6.77	34.84	38.50	Peak	174	100	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11b CH 1 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.97	48.08	54.00	-5.92	46.74	3.31	33.06	35.03	Average	100	327	HORIZONTAL
2	4824.03	51.91	74.00	-22.09	50.57	3.31	33.06	35.03	Peak	100	327	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.96	53.47	54.00	-0.53	52.13	3.31	33.06	35.03	Average	105	290	VERTICAL
2	4823.96	55.97	74.00	-18.03	54.63	3.31	33.06	35.03	Peak	105	290	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11b CH 6 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.94	48.37	54.00	-5.63	46.91	3.33	33.16	35.03	Average	158	294	HORIZONTAL
2	4874.01	51.44	74.00	-22.56	49.98	3.33	33.16	35.03	Peak	158	294	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.96	53.59	54.00	-0.41	52.13	3.33	33.16	35.03	Average	104	289	VERTICAL
2	4874.05	55.21	74.00	-18.79	53.75	3.33	33.16	35.03	Peak	104	289	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11b CH 11 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.94	49.64	54.00	-4.36	48.04	3.35	33.26	35.01	Average	177	234	HORIZONTAL
2	4923.96	52.47	74.00	-21.53	50.87	3.35	33.26	35.01	Peak	177	234	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.97	53.89	54.00	-0.11	52.29	3.35	33.26	35.01	Average	145	258	VERTICAL
2	4923.99	56.16	74.00	-17.84	54.56	3.35	33.26	35.01	Peak	145	258	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11g CH 1 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.23	47.49	74.00	-26.51	46.15	3.31	33.06	35.03	Peak	100	326	HORIZONTAL
2	4822.08	35.03	54.00	-18.97	33.69	3.31	33.06	35.03	Average	100	326	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.23	53.02	74.00	-20.98	51.68	3.31	33.06	35.03	Peak	119	288	VERTICAL
2	4820.31	39.50	54.00	-14.50	38.16	3.31	33.06	35.03	Average	119	288	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11g CH 6 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4876.48	38.91	54.00	-15.09	37.45	3.33	33.16	35.03	Average	154	237	HORIZONTAL
2	4880.09	52.15	74.00	-21.85	50.69	3.33	33.16	35.03	Peak	154	237	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4877.61	42.67	54.00	-11.33	41.21	3.33	33.16	35.03	Average	102	260	VERTICAL
2	4880.09	56.37	74.00	-17.63	54.91	3.33	33.16	35.03	Peak	102	260	VERTICAL

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11g CH 11 / Ant. 1 + Ant. 2
<b>Test Date</b>	Nov. 23, 2013		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4924.88	48.86	74.00	-25.14	47.26	3.35	33.26	35.01	Peak	141	224	HORIZONTAL
2	4926.16	35.96	54.00	-18.04	34.36	3.35	33.26	35.01	Average	141	224	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4926.32	40.10	54.00	-13.90	38.50	3.35	33.26	35.01	Average	103	273	VERTICAL
2	4926.81	52.51	74.00	-21.49	50.91	3.35	33.26	35.01	Peak	103	273	VERTICAL





<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 149 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11489.92	48.19	54.00	-5.81	37.77	6.74	34.82	38.50	Average	221	110	HORIZONTAL
2	11490.00	58.43	74.00	-15.57	48.01	6.74	34.82	38.50	Peak	221	110	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11489.70	55.06	74.00	-18.94	44.64	6.74	34.82	38.50	Peak	267	100	VERTICAL
2	11490.00	46.36	54.00	-7.64	35.94	6.74	34.82	38.50	Average	267	100	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 157 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11569.88	48.82	54.00	-5.18	38.40	6.77	34.85	38.50	Average	220	114	HORIZONTAL
2	11570.06	59.14	74.00	-14.86	48.72	6.77	34.85	38.50	Peak	220	114	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11570.38	44.02	54.00	-9.98	33.60	6.77	34.85	38.50	Average	173	100	VERTICAL
2	11571.92	55.68	74.00	-18.32	45.26	6.77	34.85	38.50	Peak	173	100	VERTICAL



<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11a CH 165 / Ant. 3
<b>Test Date</b>	Nov. 23, 2013		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11649.74	59.11	74.00	-14.89	48.68	6.80	34.87	38.50	Peak	221	115	HORIZONTAL
2	11649.92	49.27	54.00	-4.73	38.84	6.80	34.87	38.50	Average	221	115	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	11646.52	54.71	74.00	-19.29	44.28	6.80	34.87	38.50	Peak	172	100	VERTICAL
2	11649.80	43.13	54.00	-10.87	32.70	6.80	34.87	38.50	Average	172	100	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.  
Only worst data of each operating mode is presented.

#### **4.6.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz CH 1, 6, 11 / Ant. 1 + Ant. 2
<b>Test date</b>	Nov. 23, 2013		

##### Channel 1

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.84	66.99	74.00	-7.01	36.60	2.22	28.17	0.00	Peak	100	260	VERTICAL
2	2390.00	53.90	54.00	-0.10	23.51	2.22	28.17	0.00	Average	100	260	VERTICAL
3	2419.05	101.32			70.84	2.23	28.25	0.00	Average	100	260	VERTICAL
4	2419.21	111.18			80.70	2.23	28.25	0.00	Peak	100	260	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.68	62.50	74.00	-11.50	32.12	2.21	28.17	0.00	Peak	100	206	HORIZONTAL
2	2390.00	47.23	54.00	-6.77	16.84	2.22	28.17	0.00	Average	100	206	HORIZONTAL
3	2444.69	110.54			80.01	2.24	28.29	0.00	Peak	100	206	HORIZONTAL
4	2445.01	100.89			70.36	2.24	28.29	0.00	Average	100	206	HORIZONTAL
5	2483.50	47.91	54.00	-6.09	17.27	2.26	28.38	0.00	Average	100	206	HORIZONTAL
6	2484.46	65.12	74.00	-8.88	34.48	2.26	28.38	0.00	Peak	100	206	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2469.21	106.80			76.16	2.26	28.38	0.00	Peak	100	209	HORIZONTAL
2	2470.01	96.97			66.33	2.26	28.38	0.00	Average	100	209	HORIZONTAL
3	2483.50	53.68	54.00	-0.32	23.04	2.26	28.38	0.00	Average	100	209	HORIZONTAL
4	2484.46	67.83	74.00	-6.17	37.19	2.26	28.38	0.00	Peak	100	209	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz CH 3, 6, 9 / Ant. 1 + Ant. 2
<b>Test date</b>	Nov. 23, 2013		

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.36	65.34	74.00	-8.66	34.96	2.21	28.17	0.00	Peak	100	218	VERTICAL
2	2390.00	53.59	54.00	-0.41	23.20	2.22	28.17	0.00	Average	100	218	VERTICAL
3	2432.26	103.22			72.74	2.23	28.25	0.00	Peak	100	218	VERTICAL
4	2435.14	93.04			62.52	2.23	28.29	0.00	Average	100	218	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	51.37	54.00	-2.63	20.98	2.22	28.17	0.00	Average	100	203	VERTICAL
2	2390.00	65.48	74.00	-8.52	35.09	2.22	28.17	0.00	Peak	100	203	VERTICAL
3	2446.30	96.75			66.22	2.24	28.29	0.00	Average	100	203	VERTICAL
4	2447.26	107.20			76.67	2.24	28.29	0.00	Peak	100	203	VERTICAL
5	2483.50	53.17	54.00	-0.83	22.54	2.26	28.37	0.00	Average	100	203	VERTICAL
6	2483.82	66.63	74.00	-7.37	36.00	2.26	28.37	0.00	Peak	100	203	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2449.76	102.27			71.74	2.24	28.29	0.00	Peak	100	200	VERTICAL
2	2450.40	87.52			56.99	2.24	28.29	0.00	Average	100	200	VERTICAL
3	2483.50	53.57	54.00	-0.43	22.94	2.26	28.37	0.00	Average	100	200	VERTICAL
4	2484.14	65.22	74.00	-8.78	34.59	2.26	28.37	0.00	Peak	100	200	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Ant. 1 + Ant. 2
<b>Test date</b>	Nov. 23, 2013		

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2386.80	45.69	54.00	-8.31	15.31	2.21	28.17	0.00	Average	100	206	HORIZONTAL
2	2388.88	57.93	74.00	-16.07	27.55	2.21	28.17	0.00	Peak	100	206	HORIZONTAL
3	2411.04	103.56			73.13	2.22	28.21	0.00	Peak	100	206	HORIZONTAL
4	2411.20	99.83			69.40	2.22	28.21	0.00	Average	100	206	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2381.67	57.68	74.00	-16.32	27.34	2.21	28.13	0.00	Peak	100	229	VERTICAL
2	2390.00	45.28	54.00	-8.72	14.89	2.22	28.17	0.00	Average	100	229	VERTICAL
3	2436.36	102.64			72.12	2.23	28.29	0.00	Average	100	229	VERTICAL
4	2438.28	106.53			76.01	2.23	28.29	0.00	Peak	100	229	VERTICAL
5	2483.50	45.65	54.00	-8.35	15.02	2.26	28.37	0.00	Average	100	229	VERTICAL
6	2488.63	57.83	74.00	-16.17	27.16	2.26	28.41	0.00	Peak	100	229	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2462.96	106.41			75.84	2.24	28.33	0.00	Peak	100	2	VERTICAL
2	2463.76	101.51			70.94	2.24	28.33	0.00	Average	100	2	VERTICAL
3	2483.50	46.12	54.00	-7.88	15.49	2.26	28.37	0.00	Average	100	2	VERTICAL
4	2484.78	57.99	74.00	-16.01	27.36	2.26	28.37	0.00	Peak	100	2	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.



<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Ant. 1 + Ant. 2
<b>Test date</b>	Nov. 23, 2013		

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.04	67.63	74.00	-6.37	37.25	2.21	28.17	0.00	Peak	100	190	VERTICAL
2	2390.00	53.27	54.00	-0.73	22.88	2.22	28.17	0.00	Average	100	190	VERTICAL
3	2405.59	110.59			80.16	2.22	28.21	0.00	Peak	100	190	VERTICAL
4	2405.75	100.99			70.56	2.22	28.21	0.00	Average	100	190	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.36	60.28	74.00	-13.72	29.90	2.21	28.17	0.00	Peak	132	209	HORIZONTAL
2	2390.00	46.97	54.00	-7.03	16.58	2.22	28.17	0.00	Average	132	209	HORIZONTAL
3	2444.37	102.64			72.11	2.24	28.29	0.00	Average	132	209	HORIZONTAL
4	2444.69	111.96			81.43	2.24	28.29	0.00	Peak	132	209	HORIZONTAL
5	2483.50	47.48	54.00	-6.52	16.84	2.26	28.38	0.00	Average	132	209	HORIZONTAL
6	2485.42	62.04	74.00	-11.96	31.36	2.26	28.42	0.00	Peak	132	209	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2454.63	110.22			79.65	2.24	28.33	0.00	Peak	101	156	VERTICAL
2	2454.79	99.41			68.84	2.24	28.33	0.00	Average	101	156	VERTICAL
3	2483.50	53.43	54.00	-0.57	22.80	2.26	28.37	0.00	Average	101	156	VERTICAL
4	2484.46	69.38	74.00	-4.62	38.75	2.26	28.37	0.00	Peak	101	156	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level

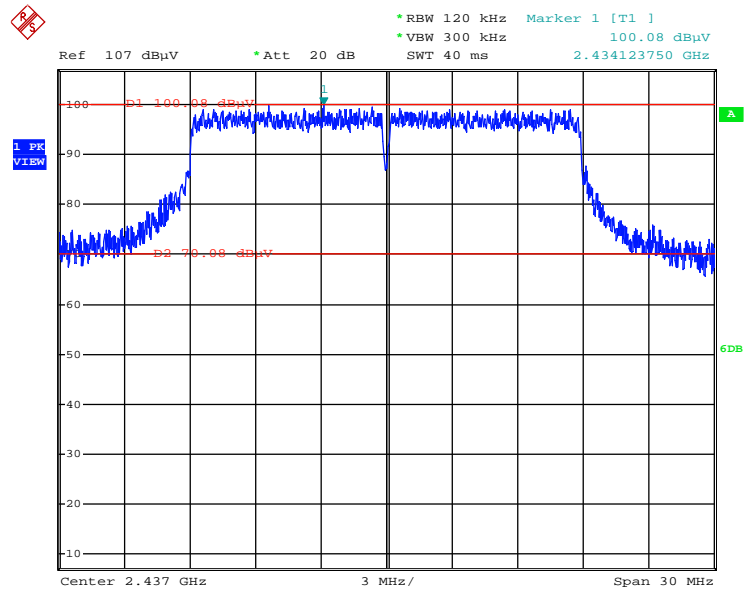


Date: 27.NOV.2013 03:57:23

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

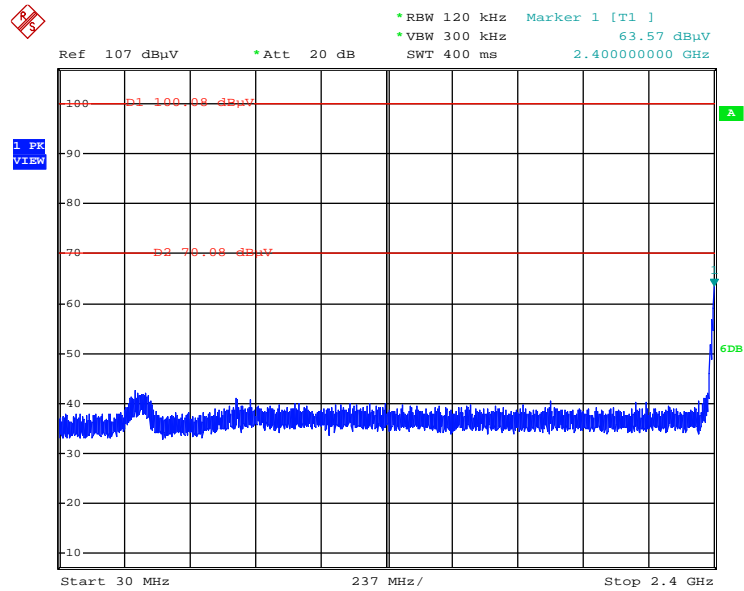


Date: 27.NOV.2013 03:57:58

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)

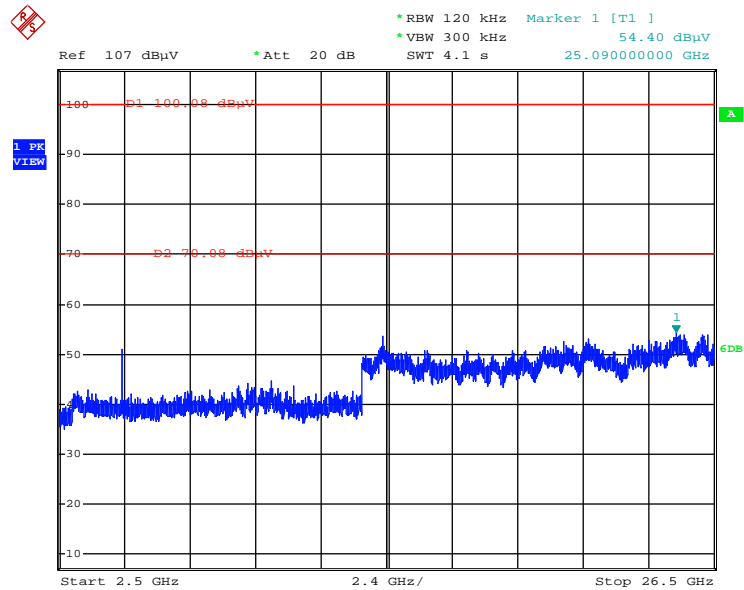


Date: 27.NOV.2013 03:58:19

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)

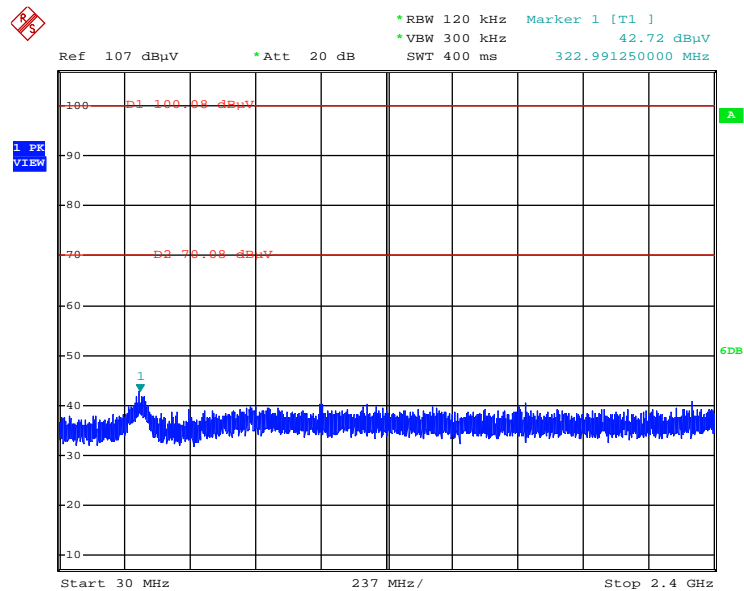


Date: 27.NOV.2013 03:59:23

Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)

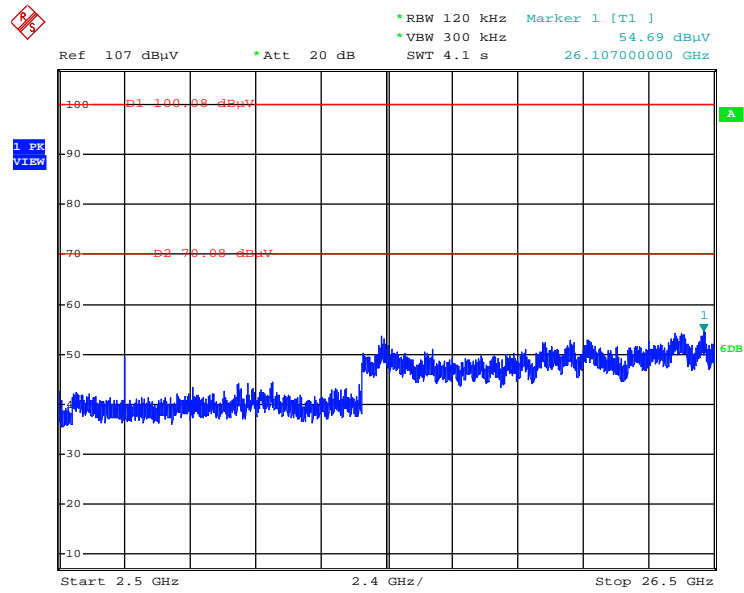


Date: 27.NOV.2013 03:59:05

Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level

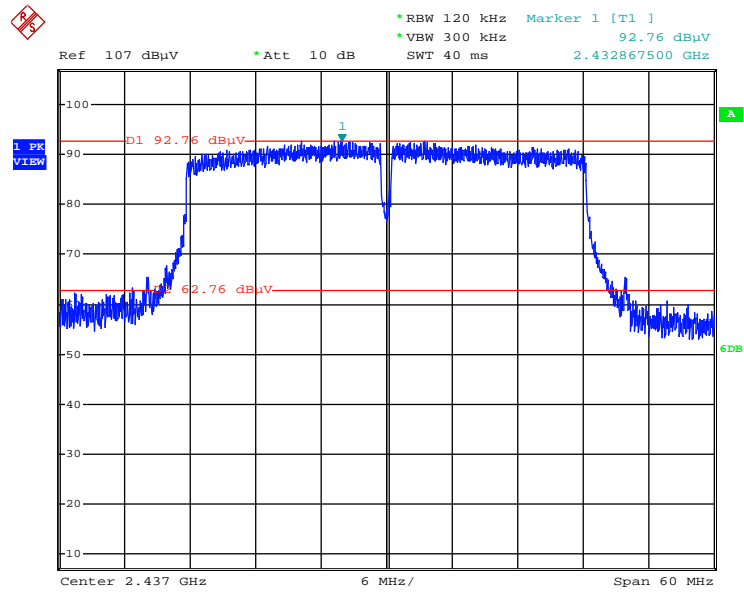


Date: 27.NOV.2013 04:00:36

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc)

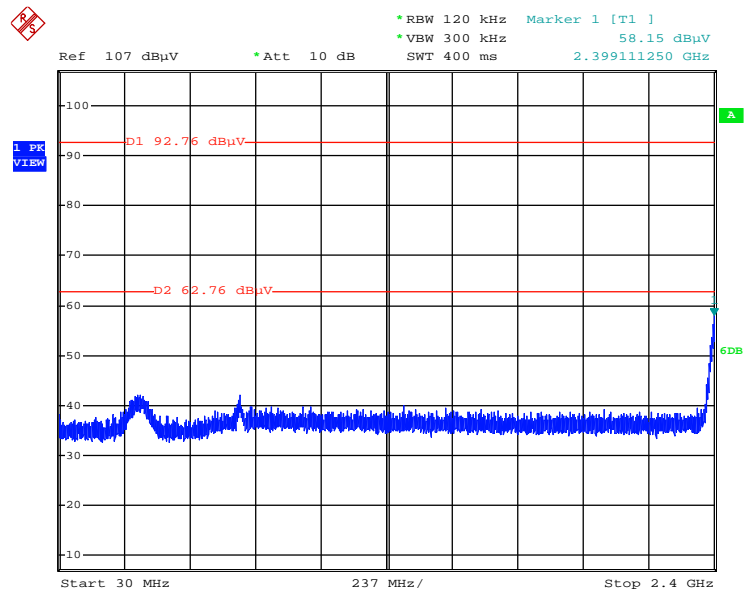


Date: 27.NOV.2013 04:01:23

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)

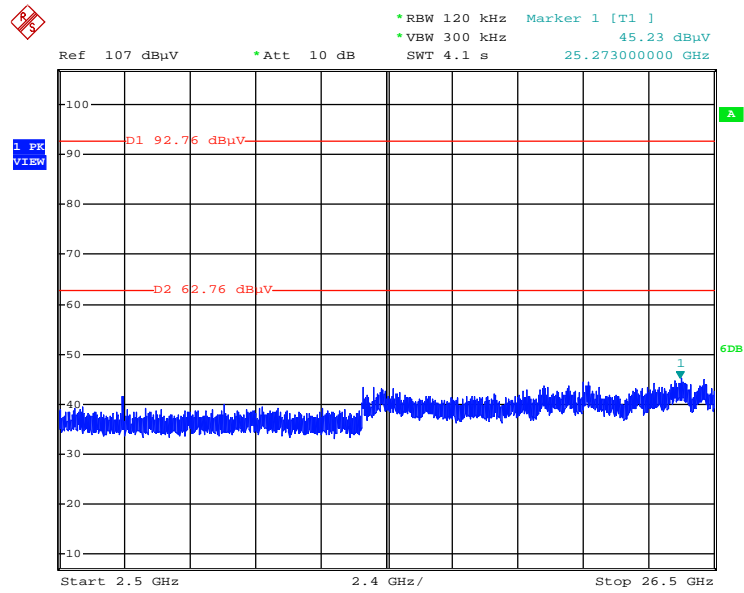


Date: 27.NOV.2013 04:01:42

Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)

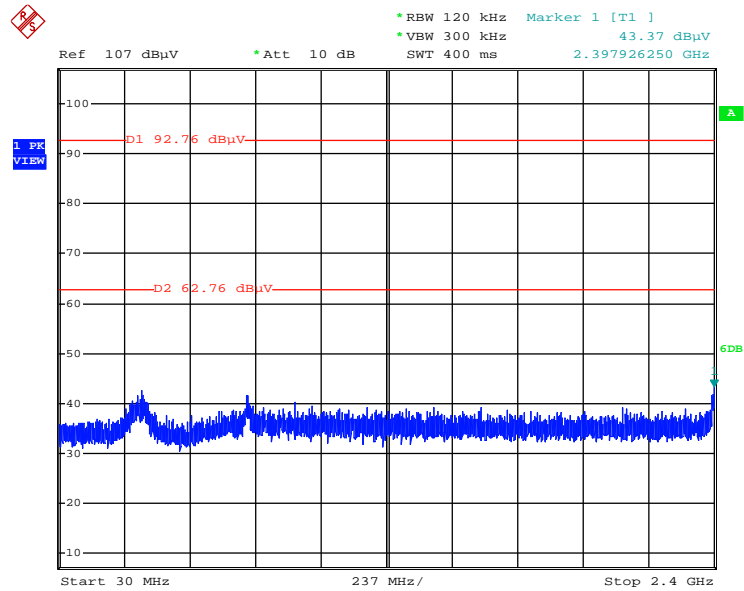


Date: 27.NOV.2013 04:02:30

## Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)

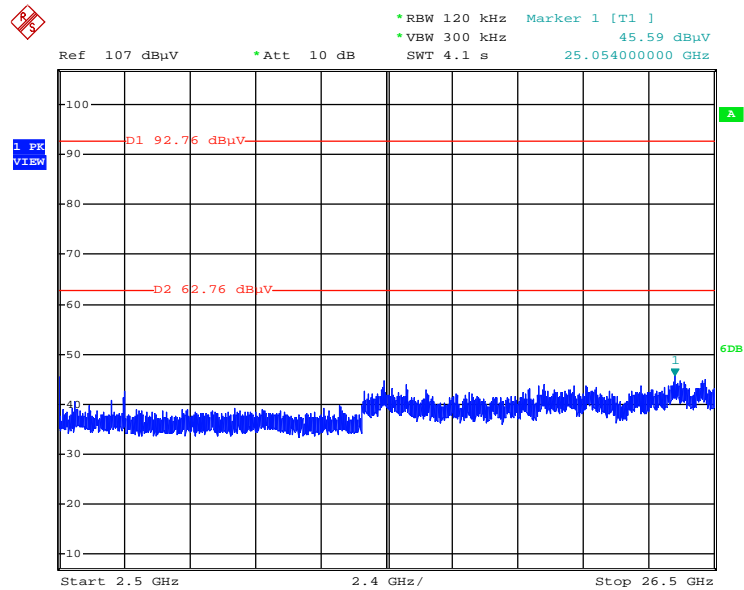


Date: 27.NOV.2013 04:02:16

Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Reference Level

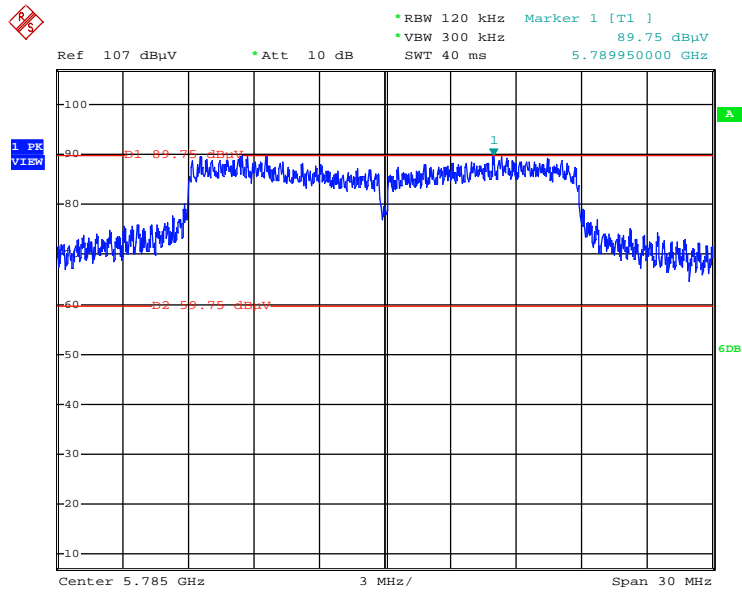

Date: 27.NOV.2013 02:38:24


Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / CH 149 / 30MHz~5725MHz (down 30dBc)

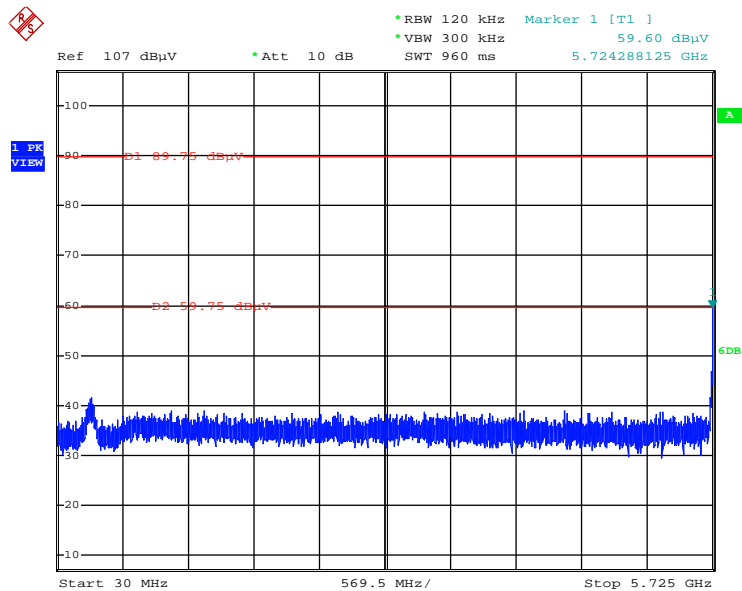

Date: 27.NOV.2013 02:40:25




Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / CH 149 / 5850MHz~40000MHz (down 30dBc)

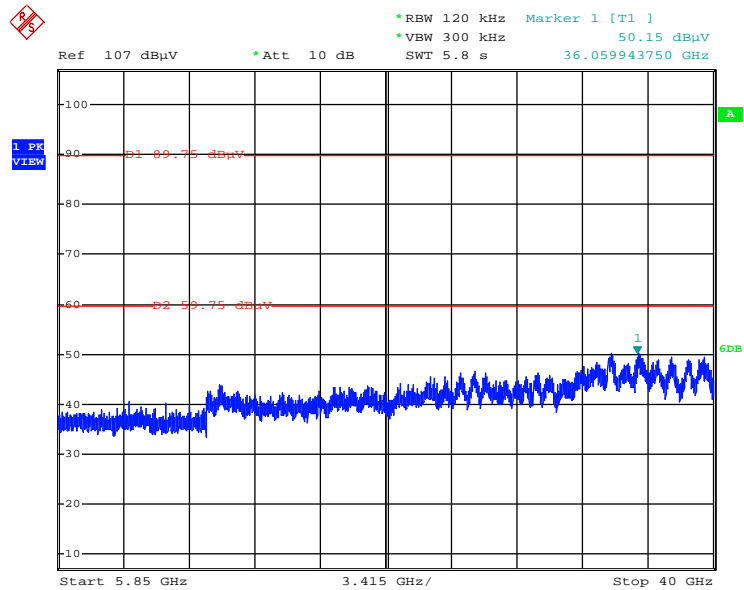

2nd comment ...


Date: :51

Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / CH 165 / 30MHz~5725MHz (down 30dBc)

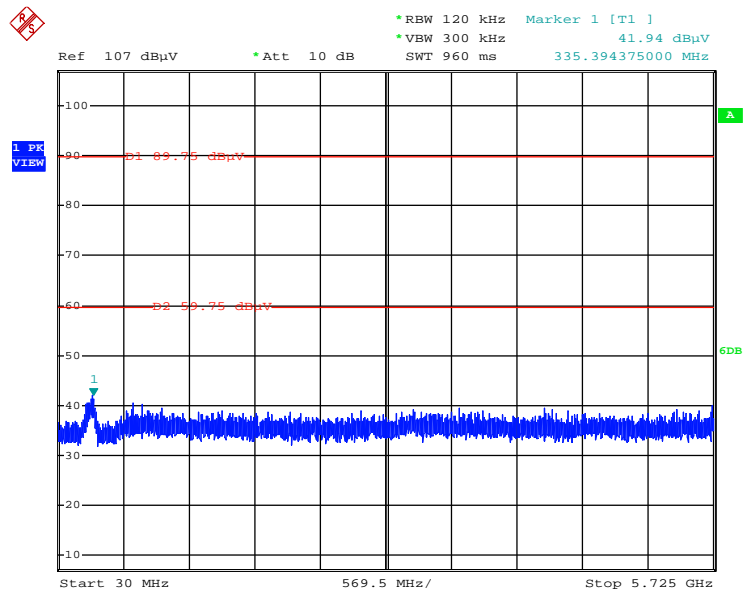


Date: 27.NOV.2013 02:41:49

Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / CH 165 / 5850MHz~40000MHz (down 30dBc)

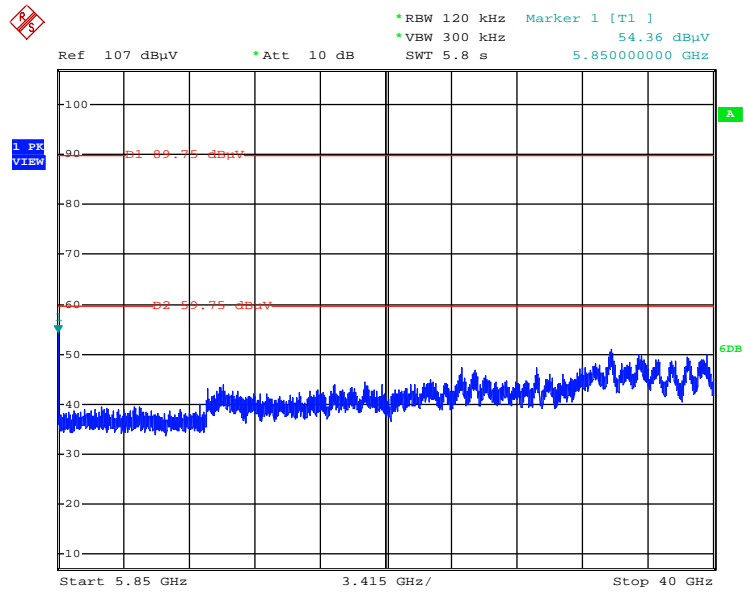


Date: 27.NOV.2013 02:41:31

Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Reference Level

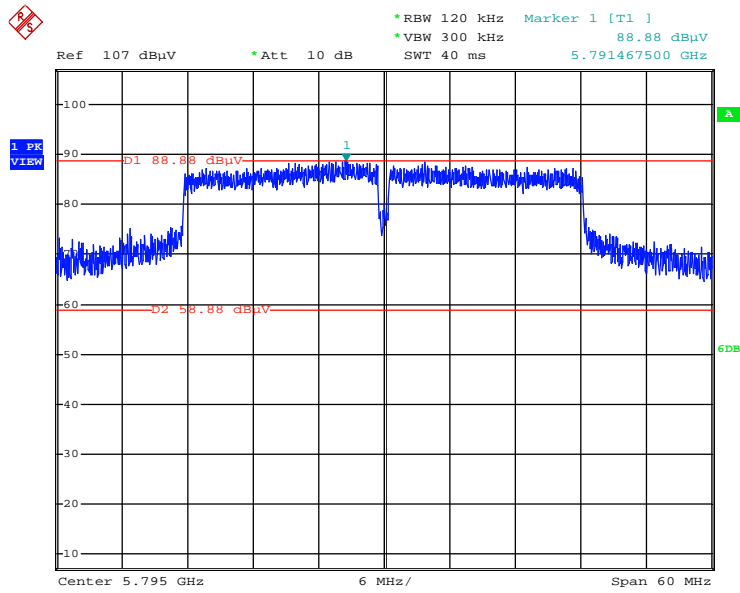


Date: 27.NOV.2013 02:20:39

Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / CH 151 / 30MHz~5725MHz (down 30dBc)

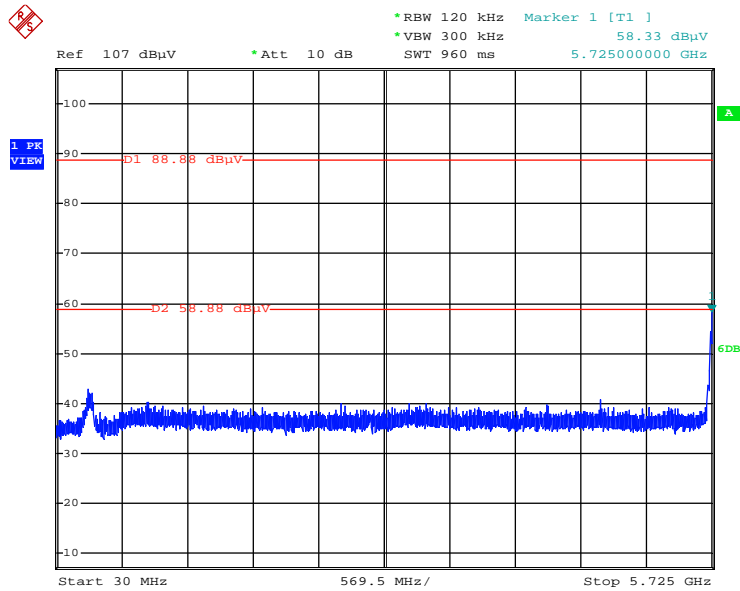


Date: 27.NOV.2013 02:22:24

Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / CH 151 / 5850MHz~40000MHz (down 30dBc)

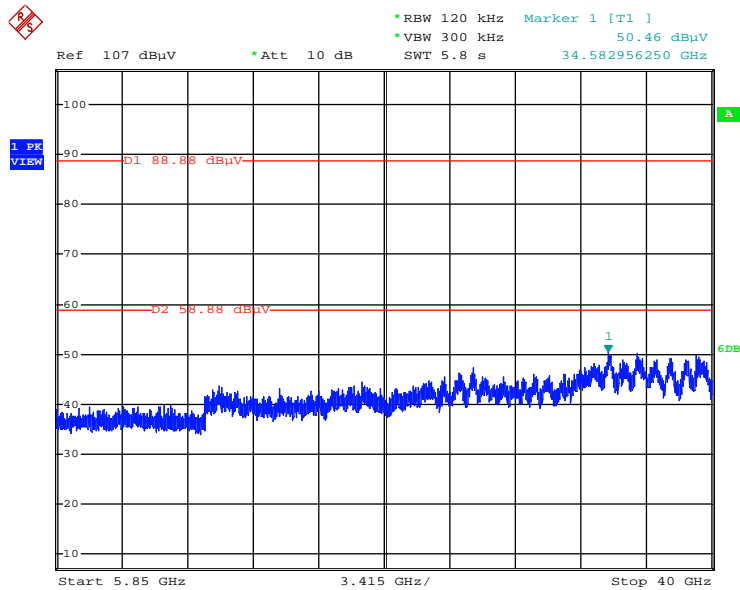


Date: 27.NOV.2013 02:23:14

Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / CH 159 / 30MHz~5725MHz (down 30dBc)

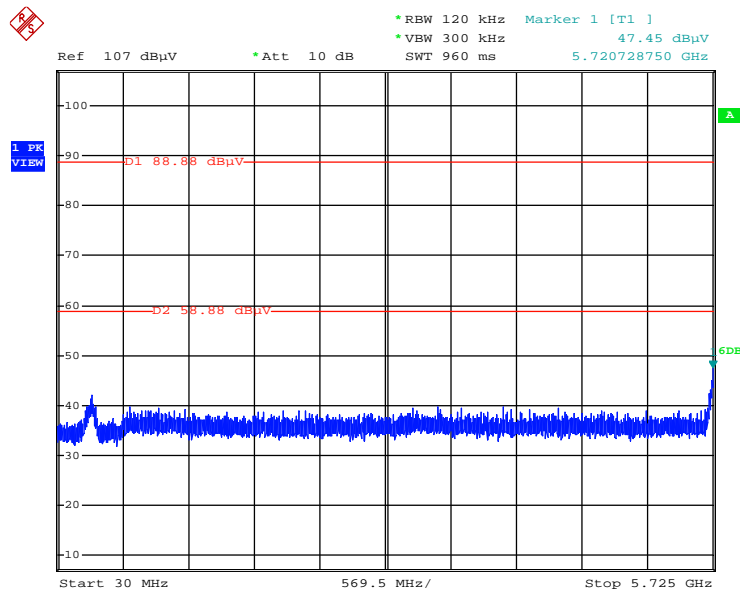


Date: 27.NOV.2013 02:21:00

Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / CH 159 / 5850MHz~40000MHz (down 30dBc)

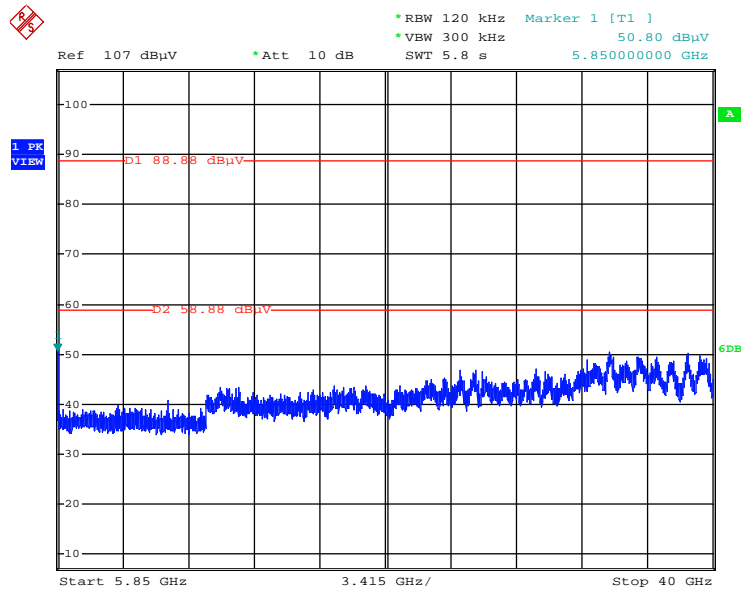


Date: 27.NOV.2013 02:21:25

Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Reference Level

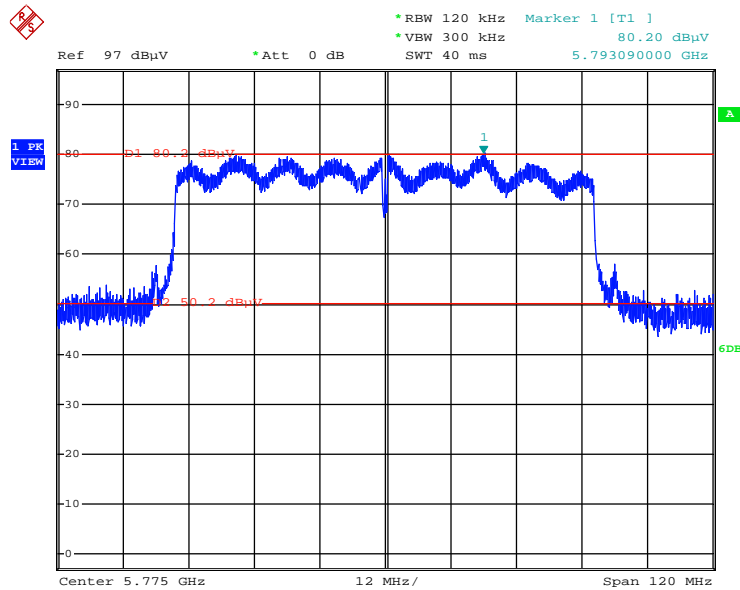


Date: 27.NOV.2013 02:11:36

Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / CH 155 / 30MHz~5725MHz (down 30dBc)

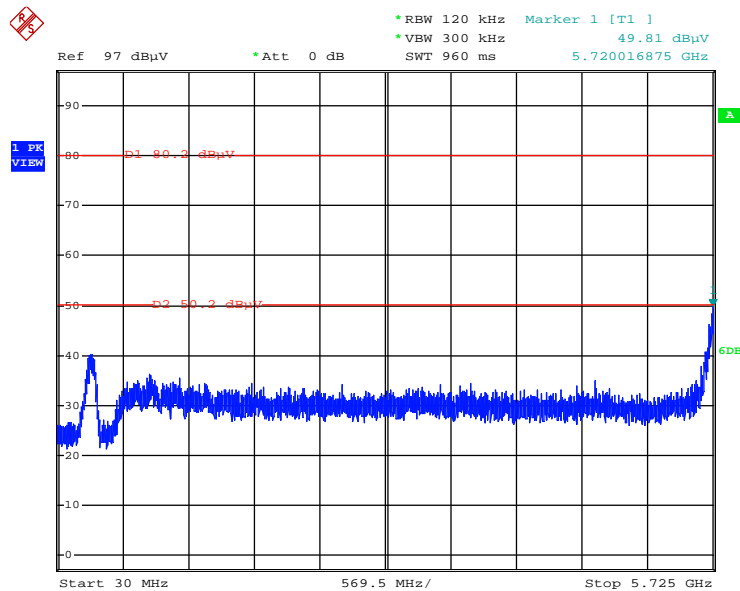


Date: 27.NOV.2013 02:12:54

Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / CH 155 / 5850MHz~4000MHz (down 30dBc)

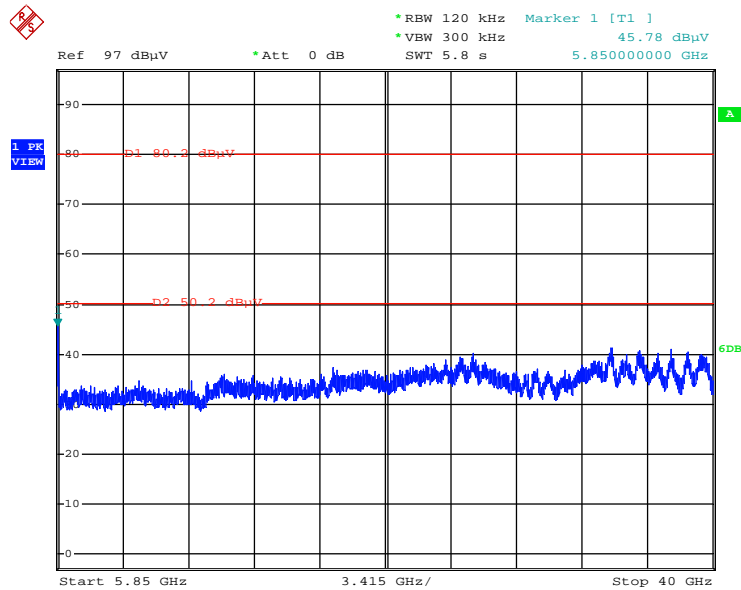


Date: 27.NOV.2013 02:13:49

Plot on Configuration IEEE 802.11b / Reference Level

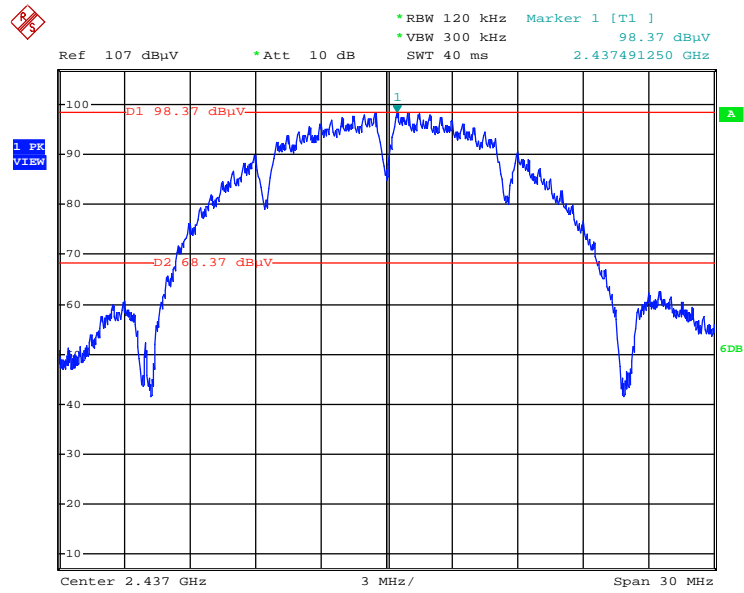

Date: 27.NOV.2013 03:51:36


Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

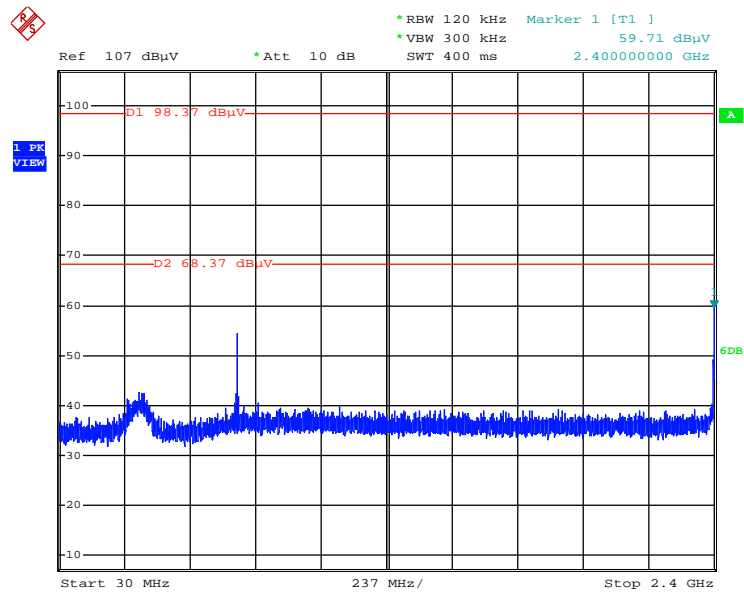

Date: 27.NOV.2013 03:52:19




Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

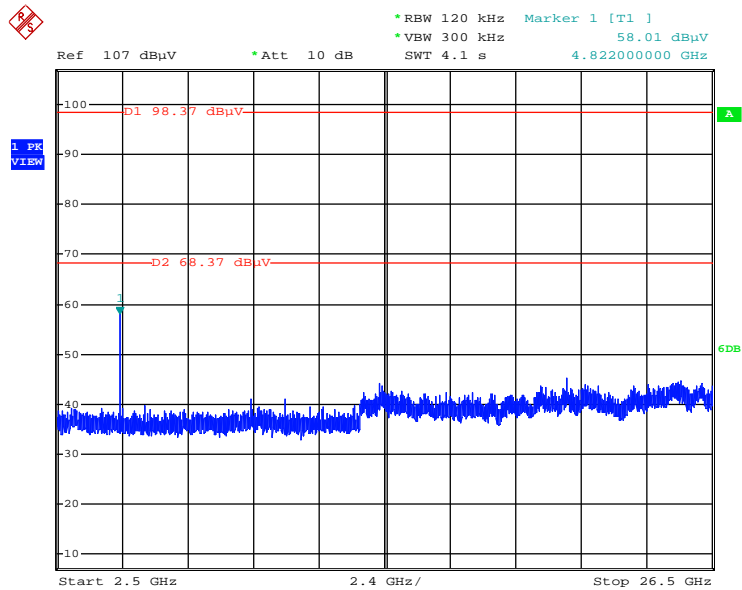


Date: 27.NOV.2013 03:52:46

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

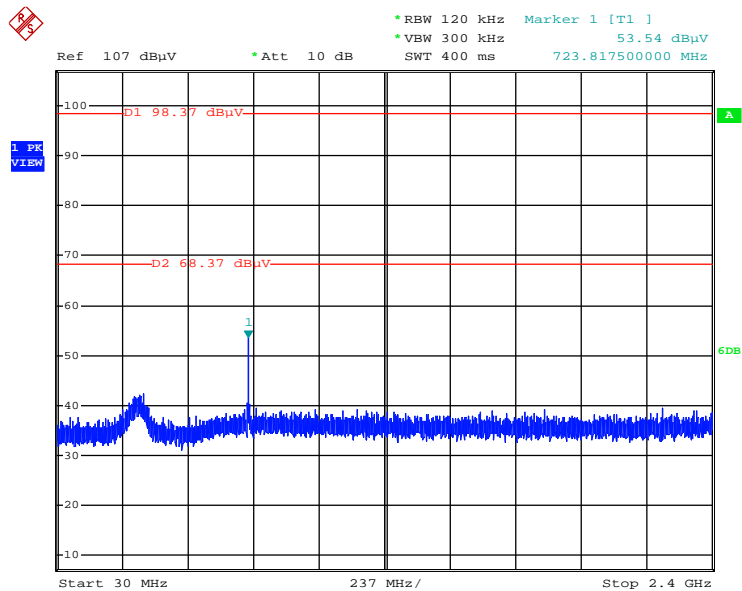


Date: 27.NOV.2013 03:53:30

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

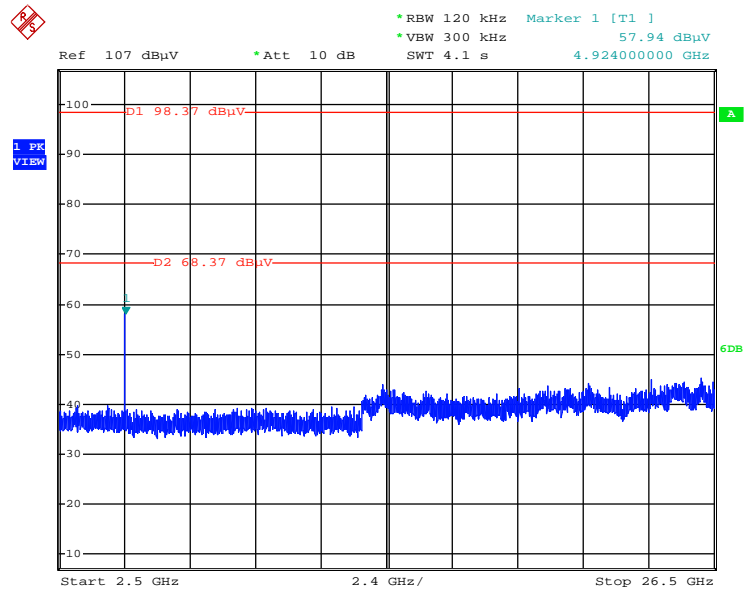


Date: 27.NOV.2013 03:53:14

Plot on Configuration IEEE 802.11g / Reference Level

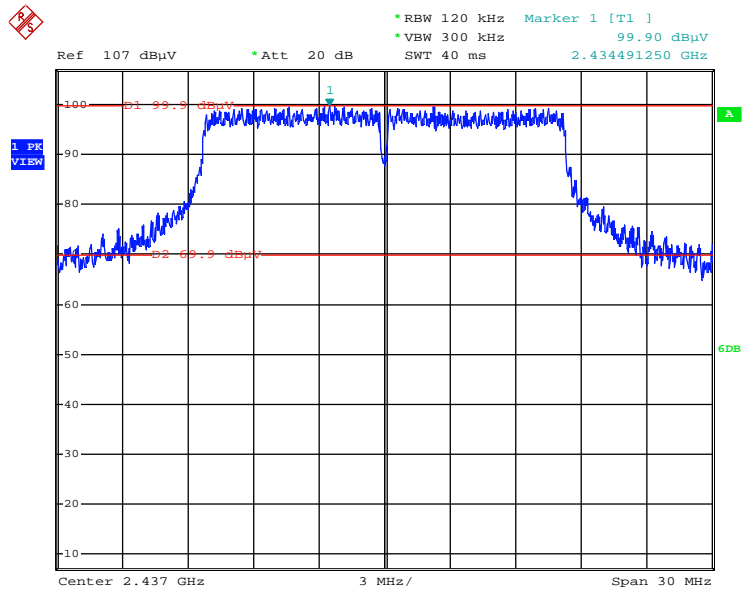


Date: 27.NOV.2013 03:54:48

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

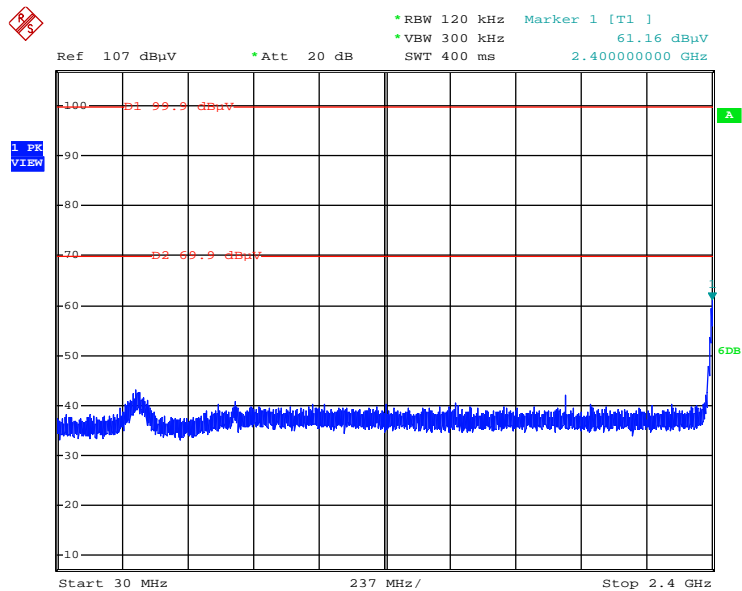


Date: 27.NOV.2013 03:55:29

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

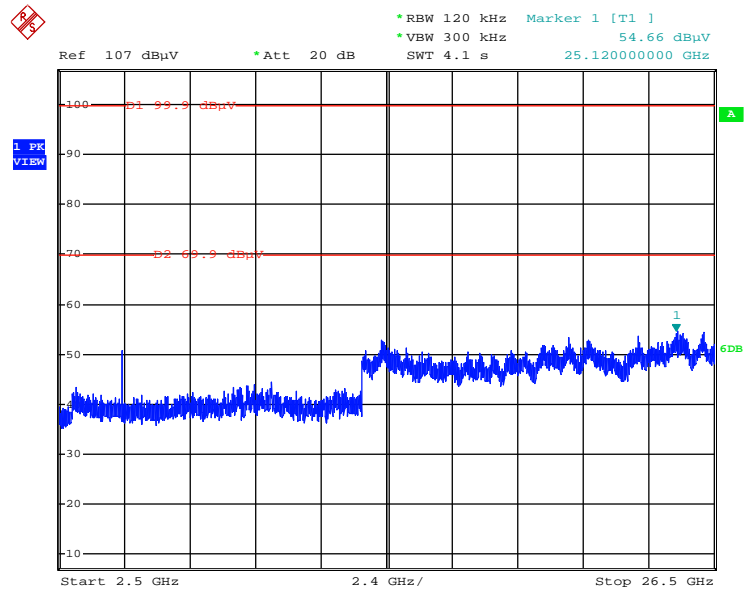


Date: 27.NOV.2013 03:55:49

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

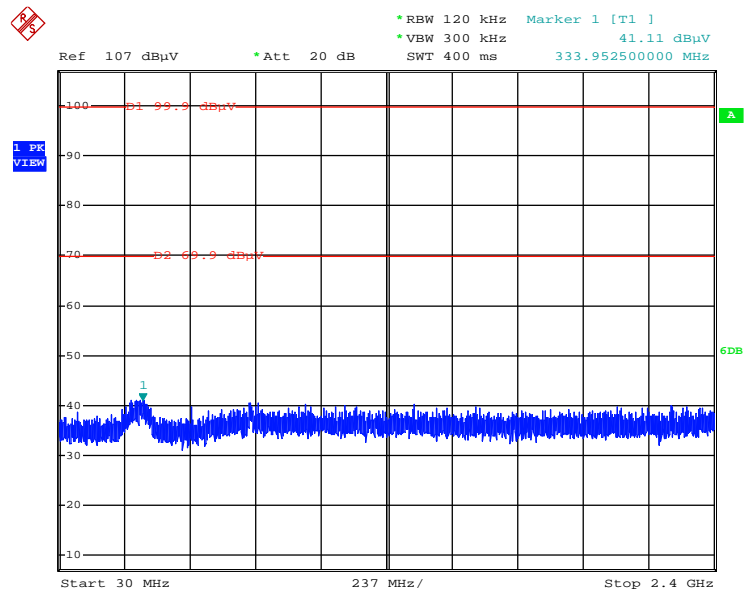


Date: 27.NOV.2013 03:56:28

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

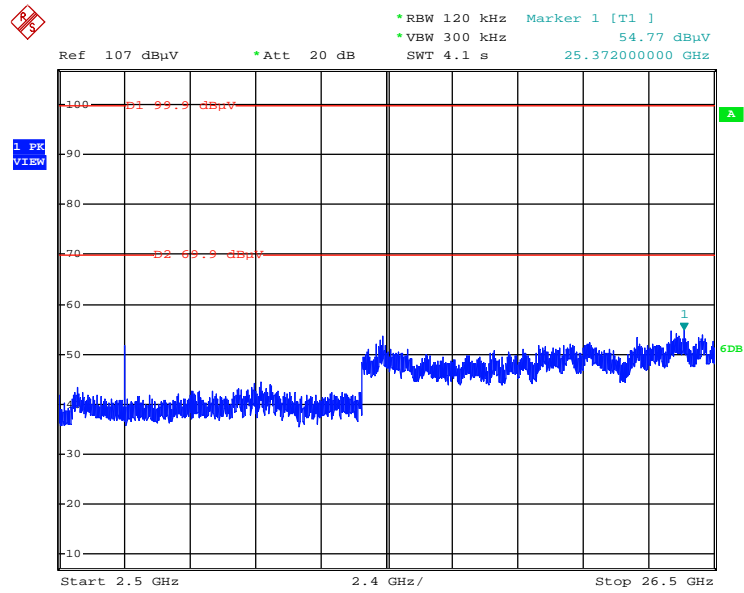


Date: 27.NOV.2013 03:56:14

Plot on Configuration IEEE 802.11a / Reference Level

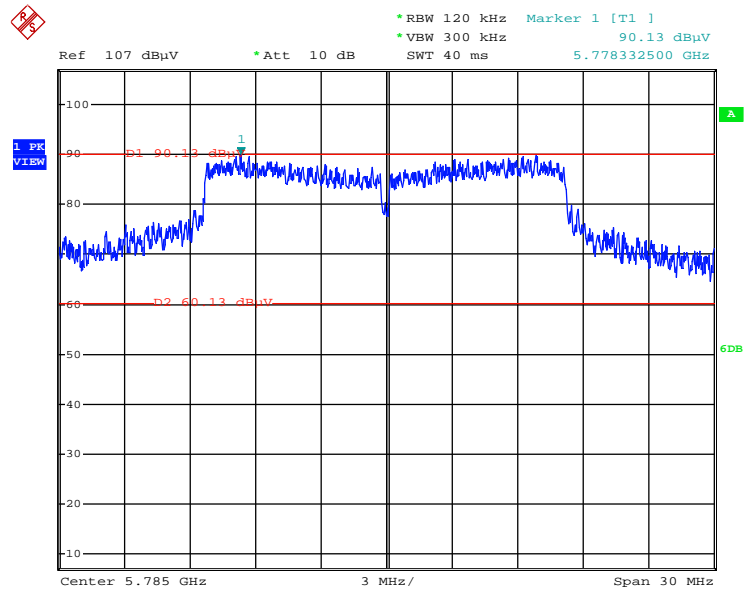


Date: 27.NOV.2013 02:30:56

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

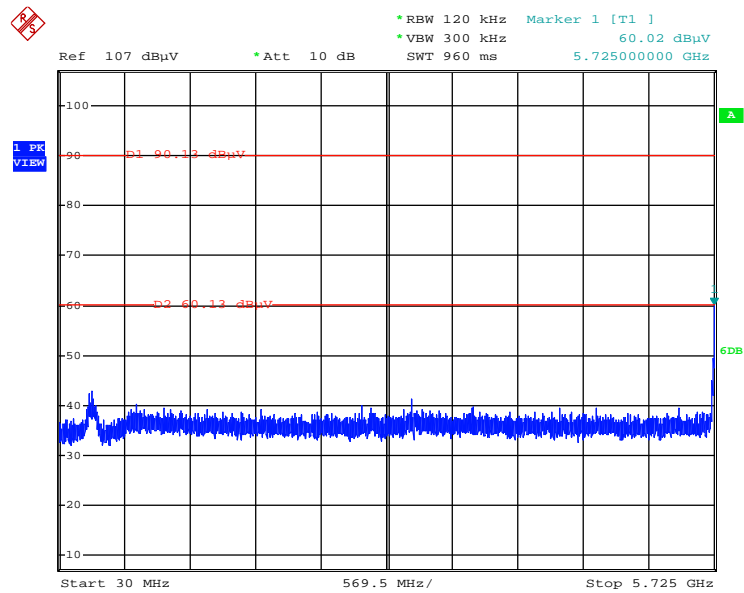


Date: 27.NOV.2013 02:35:22

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

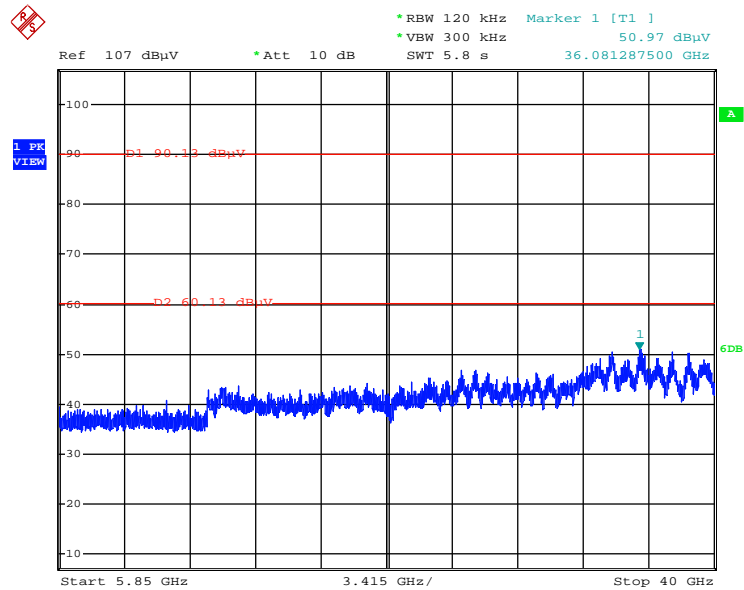


Date: 27.NOV.2013 02:35:52

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

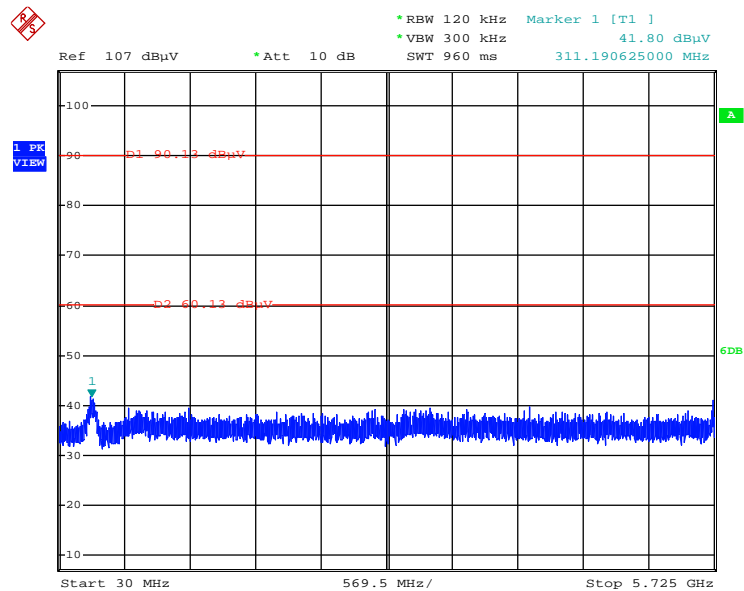

Date: 27.NOV.2013 02:37:03

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

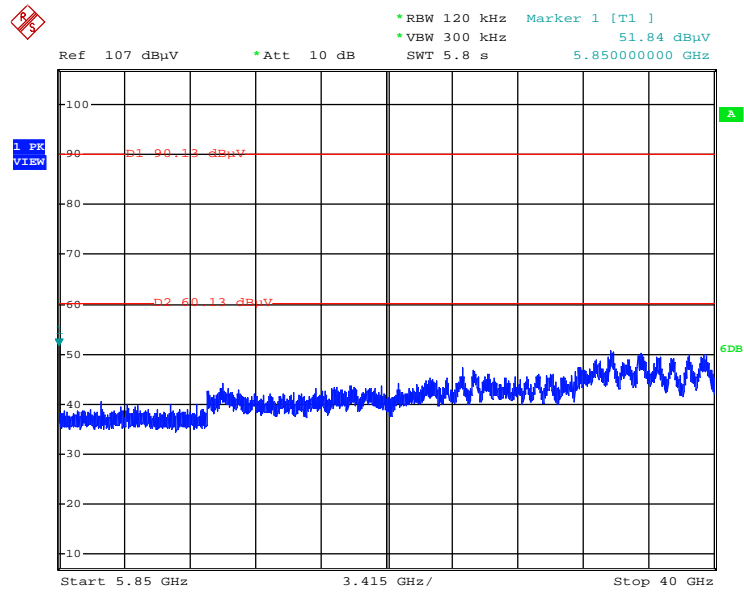

Date: 27.NOV.2013 02:36:46



## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-507	15MHz ~ 40GHz	Jan. 14, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02660	1GHz ~ 26.5GHz	May 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
Spectrum Analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Nov. 15, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Nov. 26, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\*Calibration Interval of instruments listed above is two year.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	$\pm 0.173$	dB	K=1	0.086
Cable loss	$\pm 0.174$	dB	K=2	0.087
Antenna gain	$\pm 0.169$	dB	K=2	0.084
Site imperfection	$\pm 0.433$	dB	Triangular	0.214
Pre-amplifier gain	$\pm 0.366$	dB	K=2	0.183
Transmitter antenna	$\pm 1.200$	dB	Rectangular	0.600
Signal generator	$\pm 0.461$	dB	Rectangular	0.231
Mismatch	$\pm 0.080$	dB	U-shape	0.040
Spectrum analyzer	$\pm 0.500$	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

**Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

### Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726