


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	54%
Test Engineer	Serway Li	Configurations	2.4G+5G

Horizontal

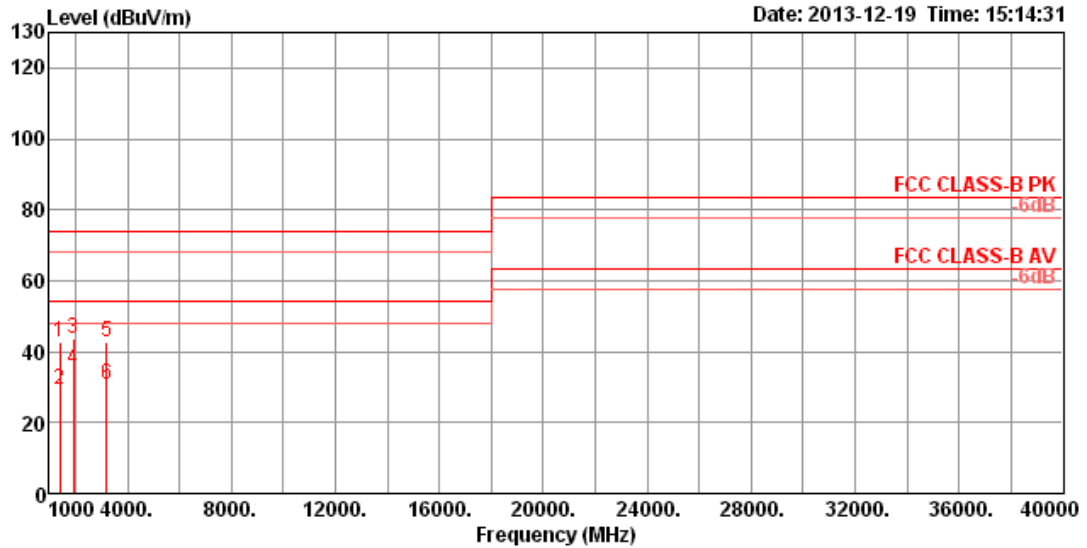

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1399.60	42.67	74.00	-31.33	51.99	2.74	25.32	37.38	104	220	HORIZONTAL	Peak
2	1400.14	29.34	54.00	-24.66	38.66	2.74	25.32	37.38	104	220	HORIZONTAL	Average
3	1937.26	43.73	74.00	-30.27	48.85	3.37	27.43	35.92	108	203	HORIZONTAL	Peak
4	1937.46	34.82	54.00	-19.18	39.94	3.37	27.43	35.92	108	203	HORIZONTAL	Average
5	3200.20	42.89	74.00	-31.11	44.58	4.35	29.91	35.95	147	122	HORIZONTAL	Peak
6	3200.28	30.89	54.00	-23.11	32.58	4.35	29.91	35.95	147	122	HORIZONTAL	Average

Vertical

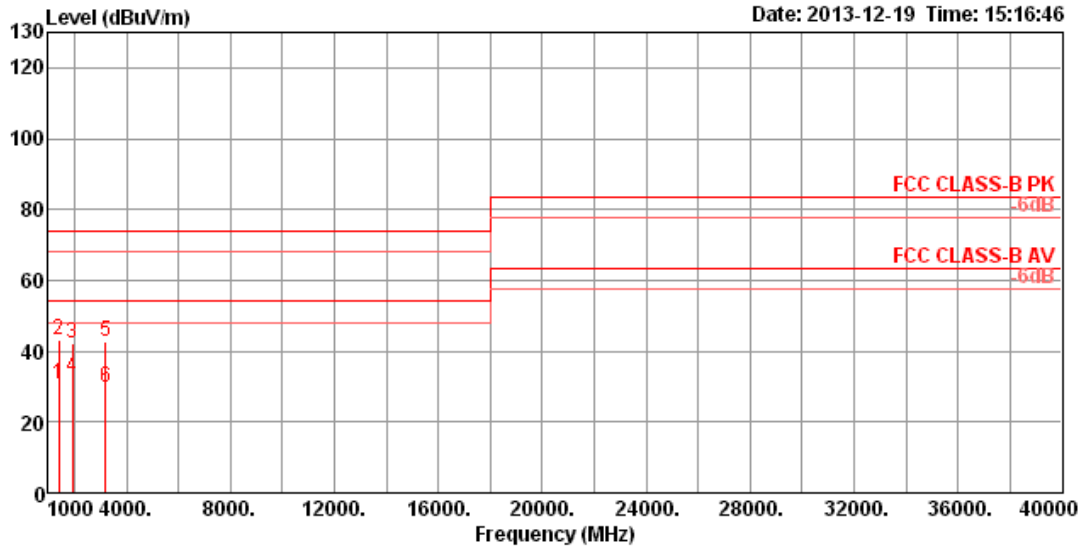

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1400.09	30.76	54.00	-23.24	40.08	2.74	25.32	37.38	101	123	VERTICAL Average
2	1400.25	43.26	74.00	-30.74	52.58	2.74	25.32	37.38	101	123	VERTICAL Peak
3	1937.31	42.37	74.00	-31.63	47.49	3.37	27.43	35.92	105	62	VERTICAL Peak
4	1937.45	32.64	54.00	-21.36	37.76	3.37	27.43	35.92	105	62	VERTICAL Average
5	3199.63	42.80	74.00	-31.20	44.49	4.35	29.91	35.95	119	253	VERTICAL Peak
6	3200.49	29.83	54.00	-24.17	31.52	4.35	29.91	35.95	119	253	VERTICAL Average